


R&S®FSUP Signal Source Analyzer Specifications

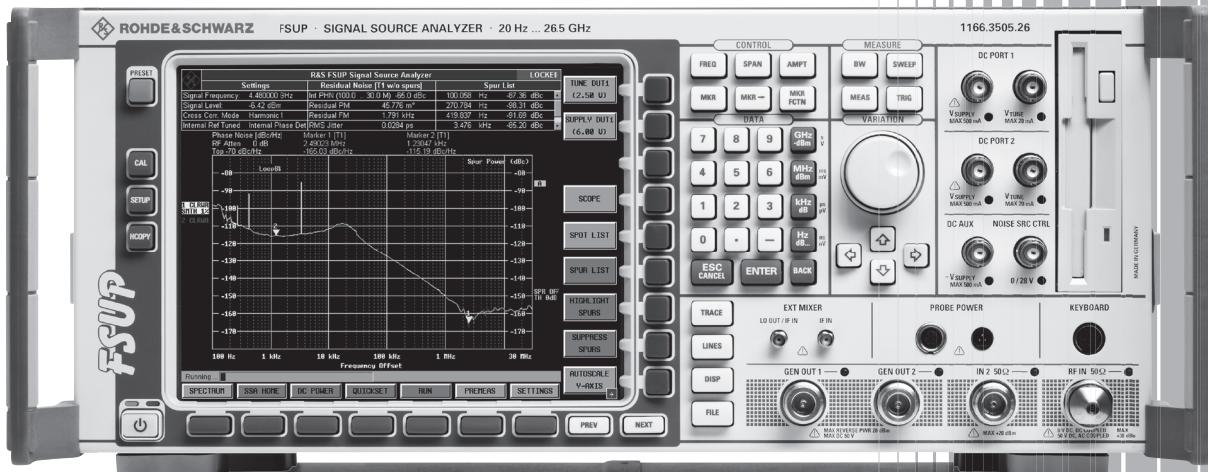

CONTENTS

Specifications.....	3
All operating modes.....	3
Internal reference frequency	3
Signal source analyzer mode.....	4
Phase noise measurement with PLL method without cross-correlation	4
Phase noise measurement with PLL method with cross-correlation	5
R&S®FSUP-B60 option: low phase noise	5
Transient measurements	5
VCO parameter characterization	6
Parameters of DC ports 1 and 2.....	7
Parameters of AUX port	7
Parameters of tuning ports 1 and 2	7
Spectrum analyzer mode.....	8
Frequency	8
Sweep	8
Resolution bandwidths.....	9
Level	10
I/Q data	13
Trigger functions	14
Inputs and outputs (front panel).....	14
Inputs and outputs (rear panel).....	15
General data	16
R&S®FSUP-B21 option: LO/IF ports for external mixers (for R&S®FSUP26 and R&S®FSUP50 only).....	17
R&S®FSU-B23 option: RF preamplifier (for R&S®FSUP26 only, requires R&S®FSU-B25).....	18
R&S®FSU-B25 option: electronic step attenuator	19
Ordering information	20
Options.....	20
Recommended extras	21

Specifications

Operating modes	
	signal source analyzer spectrum analyzer
Signal source analyzer	
	phase noise measurement with spectrum analyzer method phase noise measurement with PLL method without cross-correlation internal reference external reference phase noise measurement with PLL method with cross-correlation transient measurements VCO parameter characterization

All operating modes

Internal reference frequency

Reference frequency, internal, nominal	standard OCXO	
Aging per day	after 30 days of continuous operation	1×10^{-9}
Aging per year	after 30 days of continuous operation	1×10^{-7}
Temperature drift	+5 °C to +45 °C	8×10^{-8}
Total frequency error	per year	1.8×10^{-7}
Reference frequency, internal, nominal	R&S®FSU-B4 option	
Aging per day	after 30 days of continuous operation	2×10^{-10}
Aging per year	after 30 days of continuous operation	3×10^{-8}
Temperature drift	+5 °C to +45 °C	1×10^{-9}
Total frequency error	per year	5×10^{-8}
External reference frequency		1 MHz to 20 MHz, 1 Hz steps ¹

¹ With the R&S®FSUP-B60 option, only 10 MHz can be used as an external reference frequency.

Signal source analyzer mode

Phase noise measurement with PLL method without cross-correlation

(internal reference oscillator, internal phase detector)

Frequency range			
		R&S®FSUP8	10 MHz to 8 GHz
		R&S®FSUP26	10 MHz to 26.5 GHz
		R&S®FSUP50	10 MHz to 50 GHz
Frequency resolution			0.01 Hz
Offset frequency range			1 Hz to 30 MHz
RF level input			-10 dBm to 30 dBm
Loop bandwidth		PLL control of internal reference	1 Hz to 30 kHz ²
		PLL control of DUT	1 Hz to 100 kHz ²

Spurious level, internal reference	offset >1 kHz		
	f ≤ 8 GHz	typ. ≤ -80 dBc	
	8 GHz to 16 GHz	typ. ≤ -74 dBc	
	16 GHz to 26.5 GHz	typ. ≤ -68 dBc	
	26.5 GHz to 50 GHz	typ. ≤ -62 dBc	
Measurement uncertainty	100 Hz to 10 MHz offset	typ. <1 dB	
	1 Hz to 100 Hz or 10 MHz to 30 MHz offset	typ. <3 dB	
Spectral purity, SSB phase noise (1 Hz)	f = 640 MHz internal reference oscillator and phase detector, input level = 15 dBm, 7th harmonic selected, temperature = +20 °C to +30 °C, LNA gain = 30 dB, loop bandwidth = 10 Hz, cross-correlation OFF		
	frequency offset	SSB phase noise	
	1 Hz	<-60 dBc (1 Hz), nominal	
	10 Hz	<-90 dBc (1 Hz), nominal	
	100 Hz	<-105 dBc (1 Hz)	
	1 kHz	<-128 dBc (1 Hz)	
	10 kHz	<-135 dBc (1 Hz)	
	100 kHz	<-144 dBc (1 Hz)	
	1 MHz	<-159 dBc (1 Hz)	
	10 MHz	<-165 dBc (1 Hz), nominal	
	30 MHz	<-165 dBc (1 Hz), nominal	
	Measurement modes	internal reference, internal phase detector external reference, internal phase detector	

**Phase noise sensitivity with internal reference oscillator and phase detector (nominal values);
input level >+5 dBm (with R&S®FSUP-B60 option >+10 dBm), auto-selected harmonic, temperature +20 °C to +30 °C;
LNA gain 30 dB, loop bandwidth ≤10 × frequency offset, max. 10 kHz**

Frequency offset	input frequency, values in dBc (1 Hz)							
	10 MHz	100 MHz	1 GHz	3 GHz	10 GHz	18 GHz	26 GHz	50 GHz
1 Hz	-105	-85	-65	-55	-45	-40	-35	-32
10 Hz	-127	-107	-87	-77	-67	-62	-59	-53
100 Hz	-144	-127	-108	-98	-88	-83	-80	-74
1 kHz	-158	-146	-126	-116	-106	-101	-98	-92
10 kHz	-162	-151	-134	-123	-114	-109	-106	-100
100 kHz	-164	-157	-144	-134	-124	-119	-116	-110
1 MHz	-166	-166	-161	-154	-144	-139	-136	-130
10 MHz	—	-166	-165	-163	-160	-160	-160	-145
30 MHz	—	-166	-165	-163	-160	-160	-160	-145

² Limits may vary depending on DUT tuning slope and resulting loop stability.

Phase noise measurement with PLL method with cross-correlation

R&S®FSUP-B60 option: low phase noise

Frequency range	R&S®FSUP8 R&S®FSUP26 R&S®FSUP50	10 MHz to 8 GHz 10 MHz to 8 GHz 10 MHz to 8 GHz
Number of correlations		1 to 10000

Phase noise sensitivity improvement by cross-correlation (typ.)	number of correlations (average factor)	improvement of phase noise sensitivity values without cross-correlation by up to
	100	10 dB
	10000	20 dB

Transient measurements

Measurement capabilities		frequency versus time phase versus time amplitude versus time carrier power versus time
Max. recording length		131200 samples
Bandwidth	sampling rate	max. recording time
100 Hz	122.0 Hz	1069 s
200 Hz	244.1 Hz	534 s
400 Hz	488.3 Hz	267 s
800 Hz	977.6 Hz	133 s
1.6 kHz	1.953 kHz	66.8 s
3.2 kHz	3.906 kHz	33.4 s
6.4 kHz	7.812 kHz	16.7 s
12.5 kHz	15.62 kHz	8.36 s
25 kHz	31.25 kHz	4.18 s
50 kHz	62.5 kHz	2.09 s
100 kHz	125 kHz	1.04 s
200 kHz	250 kHz	522 ms
400 kHz	500 kHz	261 ms
800 kHz	1 MHz	131 ms
1.6 MHz	2 MHz	65.3 ms
3 MHz	4 MHz	32.6 ms
5 MHz	8 MHz	16.3 ms
8 MHz	16 MHz	8.2 ms
10 MHz	32 MHz	4.1 ms
18 MHz	32 MHz	4.1 ms
30 MHz	64 MHz	2 ms
Trigger functions		free run, external, IF power
Transient carrier power measurement		
Display range		noise floor to +30 dBm
Max. dynamic range	demodulation bandwidth 200 kHz	typ. 75 dB
Display linearity	S/N > 16 dB	typ. 0.2 dB
Measurement uncertainty	S/N > 16 dB (RF = 50 kHz to 3 GHz)	typ. 1 dB
Transient frequency measurement		
Measurement range		0 Hz to 14 MHz
Frequency deviation uncertainty		<3 % of measured value + residual FM
Residual FM	demodulation bandwidth ≤200 kHz, RMS RF ≤ 1 GHz RF = 3 GHz	15 Hz 65 Hz
Distortion	deviation <400 kHz	0.3 %
Transient phase measurement		
Measurement range		<1000 rad

VCO parameter characterization

Measurement parameters	VCO tuning characteristic VCO tuning sensitivity RF power pushing ON/OFF measurement of harmonics VCO DC characteristic summary	
Frequency range	R&S®FSUP8	20 Hz to 8 GHz
	R&S®FSUP26	20 Hz to 26.5 GHz
	R&S®FSUP50	20 Hz to 50 GHz
Power supplies		
Tuning ports		2 tuning ports
DC ports		2 DC ports
AUX ports		1 auxiliary port
VCO tuning characteristics		
Display		automatic scaling numeric values of key parameters
Pushing		display of 3 traces for 3 different voltages in parallel
VCO tuning sensitivity		
Display		automatic scaling numeric values of key parameters
Pushing		display of 3 traces for 3 different voltages in parallel
RF power		
Display		automatic scaling numeric values of key parameters
		combined display of tuning and power characteristic
Pushing		display of 3 traces for 3 different voltages in parallel
Pulling ³	R&S®FSP-B28 option; TTL switching signals for a user pulling unit (external) are supported	display of 3 traces for 3 different termination impedances in parallel
Measurement of harmonics		
Display		automatic scaling numeric values of key parameters
	number of displayed harmonics	display of 3 traces for 3 harmonics
Order of harmonics	user-selectable	0 to 10
VCO DC characteristics		
Display		automatic scaling numeric values of key parameters
Additional features		switching sequence for power ports

³ Requires an installed R&S®FSP-B28 option.

Parameters of DC ports 1 and 2

Voltage	minimum value	0 V
	maximum value	12 V
	measurement accuracy (+20 °C to +30 °C)	±(0.4 % of reading + 5 mV)
	noise voltage (1 Hz) at 10 kHz offset	<10 nV, nominal
Current	maximum current	500 mA ⁴
	measurement accuracy (+20 °C to +30 °C)	±(2 % of reading + 5 mA)
Additional settings		minimum and maximum voltage limit setting
		maximum current limit
	pushing	settable pushing voltage

Parameters of AUX port

Voltage	minimum voltage	-10 V
	maximum voltage	0 V
	measurement accuracy (+20 °C to +30 °C)	±(0.4 % of reading + 5 mV)
	noise voltage (1 Hz) at 10 kHz offset	<20 nV, nominal
Current	maximum current	500 mA
	measurement accuracy (+20 °C to +30 °C)	±(2 % of reading + 5 mA), nominal

Parameters of tuning ports 1 and 2

Voltage	minimum value	-10 V
	maximum value	28 V
Setting	setting accuracy (+20 °C to +30 °C)	±(0.2 % of set value + 5 mV) ⁵
	noise voltage (1 Hz) at 10 kHz offset	1 nV, nominal
Current	maximum current (source impedance 1 kΩ)	20 mA ⁵
	measurement accuracy (+20 °C to +30 °C)	±(2 % of reading + 2 mA)
Source impedance		max. 3 kΩ

⁴ If both DC ports are active, the maximum current of 500 mA is the sum current of both ports.

⁵ If current is drawn from the tuning port, the tuning voltage may decrease due to a voltage drop over the source impedance.

Spectrum analyzer mode

Frequency

Frequency range	R&S®FSUP8	DC-coupled	20 Hz to 8 GHz
		AC-coupled	1 MHz to 8 GHz
	R&S®FSUP26	DC-coupled	20 Hz to 26.5 GHz
		AC-coupled	10 MHz to 26.5 GHz
	R&S®FSUP50	DC-coupled	20 Hz to 50 GHz
Frequency resolution			0.01 Hz

Frequency display		with marker or frequency counter
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Marker tuning frequency step size	default	span/624
	marker step size = sweep points	span/(\text{sweep points} - 1)
Frequency counter resolution	selectable	0.1 Hz to 10 kHz
Count accuracy	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference error} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		1 %

Spectral purity, SSB phase noise (1 Hz)		
	f = 640 MHz	
Residual FM	RBW 10 kHz, RMS	1 Hz, nominal
Carrier offset	10 Hz	$\leq -86 \text{ dBc}$, nominal
	100 Hz	$\leq -98 \text{ dBc}$, typ. -104 dBc
	1 kHz	$\leq -116 \text{ dBc}$, typ. -124 dBc
	10 kHz	$\leq -128 \text{ dBc}$, typ. -133 dBc
	100 kHz	$\leq -130 \text{ dBc}$, typ. -134 dBc
	1 MHz	$\leq -140 \text{ dBc}$, typ. -150 dBc
	10 MHz	typ. -160 dBc

Sweep

Sweep time	time sweep, span = 0 Hz frequency sweep, span $\geq 10 \text{ Hz}$	1 μs to 16000 s in 5 % steps 2.5 ms to 16000 s in steps of $\leq 10 \%$
Max. deviation of sweep time		3 %
Measurement in time domain		with marker and cursor lines (resolution 31.25 ns)

Resolution bandwidths

Sweep filters		
3 dB bandwidths		10 Hz to 20 MHz in 1/2/3/5 sequence, 50 MHz
Bandwidth uncertainty	10 Hz to 100 kHz (digital) 200 kHz to 5 MHz (analog)	<3 % <10 %
	10 MHz 20 MHz 50 MHz, $f \leq 3.6$ GHz 50 MHz, $f > 3.6$ GHz	-30 % to +10 % -20 % to +20 % -20 % to +20 % -30 % to +100 %
Shape factor 60 dB : 3 dB		
	≤100 kHz 200 kHz to 2 MHz 3 MHz to 10 MHz 20 MHz, 50 MHz	<6 <12 <7 <6, nominal
FFT filters		
3 dB bandwidths		1 Hz to 30 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		<5 %, nominal
Shape factor 60 dB : 3 dB		<3, nominal
EMI filters		
6 dB bandwidths		200 Hz, 9 kHz, 120 kHz
Bandwidth uncertainty		3 %, nominal
Shape factor 60 dB : 3 dB		<6, nominal
Channel filters		
Bandwidths		100, 200, 300, 500 Hz, 1, 1.5, 2, 2.4, 2.7, 3, 3.4, 4, 4.5, 5, 6, 8.5, 9, 10, 12.5, 14, 15, 16, 18 (RRC), 20, 21, 24.3 (RRC), 25, 30, 50, 100, 150, 192, 200, 300, 500 kHz, 1, 1.2288, 1.28 (RRC), 1.5, 2, 3, 3.84 (RRC), 4.096 (RRC), 5 MHz
Shape factor 60 dB : 3 dB		<2, nominal
Bandwidth uncertainty		<2 %, nominal
Video bandwidths		1 Hz to 10 MHz in 1/2/3/5 sequence

Level

Display range		displayed noise floor to +30 dBm
Maximum input level		
DC voltage	RF input, AC-coupled	50 V
	RF input, DC-coupled	0 V
CW RF power	RF attenuation 0 dB	20 dBm (= 0.1 W)
	RF attenuation ≥10 dB	30 dBm (= 1 W)
Pulse spectral density		97 dB μ V/MHz
Max. pulse voltage	RF attenuation ≥10 dB	150 V
Max. pulse energy	RF attenuation ≥10 dB, 10 μ s	1 mWs
Intermodulation		
1 dB compression of input mixer	0 dB RF attenuation	
	≤3.6 GHz	+13 dBm, nominal
	>3.6 GHz	
	R&S®FSUP8	+10 dBm, nominal
	R&S®FSUP26, R&S®FSUP50	+7 dBm, nominal
Third-order intercept point (TOI)	level 2 × –10 dBm, $\Delta f > 5 \times$ RBW or 10 kHz, whichever is larger	
	R&S®FSUP8	
	10 MHz ≤ $f_{in} < 300$ MHz	>17 dBm, typ. 20 dBm
	300 MHz ≤ $f_{in} \leq 3.6$ GHz	>20 dBm, typ. 25 dBm
	3.6 GHz ≤ f_{in} , $f \leq 8$ GHz	>18 dBm, typ. 23 dBm
	R&S®FSUP26, R&S®FSUP50	
	10 MHz ≤ $f_{in} < 300$ MHz	>17 dBm, typ. 20 dBm
	300 MHz ≤ $f_{in} < 3.6$ GHz	>22 dBm, typ. 27 dBm
	3.6 GHz ≤ $f_{in} < 26.5$ GHz	>12 dBm, typ. 15 dBm
	R&S®FSUP50	
	26.5 GHz ≤ $f_{in} < 28$ GHz	>8 dBm, typ. 11 dBm
	28 GHz ≤ $f_{in} \leq 40$ GHz	>12 dBm, typ. 15 dBm
	$f > 40$ GHz	12 dBm, nominal
Second harmonic intercept (SHI)	$f < 100$ MHz	>35 dBm
	100 MHz < $f_{in} \leq 400$ MHz	>45 dBm, typ. 55 dBm
	400 MHz < $f_{in} \leq 500$ MHz	>52 dBm, typ. 60 dBm
	500 MHz < $f_{in} \leq 1$ GHz	>45 dBm, typ. 55 dBm
	1 GHz < $f_{in} \leq 1.8$ GHz	>35 dBm
	$f_{in} > 1.8$ GHz	80 dBm, nominal

Displayed average noise level	0 dB RF attenuation, termination 50Ω , log. scaling, normalized to 1 Hz RBW $f < 10 \text{ kHz}$: 10 Hz FFT filter, trace average, sweep count = 20, trace average, $f \geq 10 \text{ kHz}$: RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, sample detector, trace average, sweep count = 20, mean marker
all models	
20 Hz	<-90 dBm
100 Hz	<-110 dBm
1 kHz	<-120 dBm
10 kHz	<-130 dBm
100 kHz	<-130 dBm
1 MHz	<-140 dBm
10 MHz	<-153 dBm
R&S®FSUP8	
$20 \text{ MHz} \leq f < 2.0 \text{ GHz}$	<-153 dBm, typ. -155 dBm
$2 \text{ GHz} \leq f < 8 \text{ GHz}$	<-150 dBm, typ. -152 dBm
R&S®FSUP26	
$20 \text{ MHz} \leq f < 2 \text{ GHz}$	<-150 dBm, typ. -155 dBm
$2 \text{ GHz} \leq f < 3.6 \text{ GHz}$	<-148 dBm, typ. -153 dBm
$3.6 \text{ GHz} \leq f < 8 \text{ GHz}$	<-152 dBm, typ. -156 dBm
$8 \text{ GHz} \leq f < 13 \text{ GHz}$	<-150 dBm, typ. -153 dBm
$13 \text{ GHz} \leq f < 18 \text{ GHz}$	<-148 dBm, typ. -151 dBm
$18 \text{ GHz} \leq f < 22 \text{ GHz}$	<-147 dBm, typ. -150 dBm
$22 \text{ GHz} \leq f < 26.5 \text{ GHz}$	<-145 dBm, typ. -148 dBm
R&S®FSUP50	
$20 \text{ MHz} \leq f < 2 \text{ GHz}$	<-150 dBm, typ. -155 dBm
$2 \text{ GHz} \leq f < 3.6 \text{ GHz}$	<-148 dBm, typ. -153 dBm
$3.6 \text{ GHz} \leq f < 13 \text{ GHz}$	<-150 dBm, typ. -153 dBm
$13 \text{ GHz} \leq f < 18 \text{ GHz}$	<-148 dBm, typ. -151 dBm
$18 \text{ GHz} \leq f < 22 \text{ GHz}$	<-147 dBm, typ. -150 dBm
$22 \text{ GHz} \leq f < 26.5 \text{ GHz}$	<-145 dBm, typ. -148 dBm
$26.5 \text{ GHz} \leq f < 32 \text{ GHz}$	<-138 dBm, typ. -141 dBm
$32 \text{ GHz} \leq f < 46 \text{ GHz}$	<-133 dBm, typ. -136 dBm
$46 \text{ GHz} \leq f < 50 \text{ GHz}$	<-128 dBm, typ. -131 dBm

Immunity to interference		
Image frequency	$f \leq 3.6 \text{ GHz}$	>90 dB, typ. >110 dB
	$f > 3.6 \text{ GHz}$	>70 dB, typ. >100 dB
	$f > 40 \text{ GHz}$	typ. >70 dB
	f = receive frequency	
Intermediate frequency	$f \leq 3.6 \text{ GHz}$	>90 dB, typ. >110 dB
	$3.6 \text{ GHz} < f \leq 4.2 \text{ GHz}$	typ. 70 dB
	$f > 4.2 \text{ GHz}$	>70 dB, typ. >90 dB
	f = receive frequency	
Spurious response	$f > 1 \text{ MHz}$, without input signal, 0 dB RF attenuation	<-103 dBm
Other interfering signals	$\Delta f > 100 \text{ kHz}$	
	mixer level <-10 dBm	
	$f \leq 2.3 \text{ GHz}$	<-80 dBc
	mixer level <-35 dBm	
	$2.3 \text{ GHz} < f < 4 \text{ GHz}$	<-70 dBc
	mixer level <-10 dBm	
	$4 \text{ GHz} \leq f < 8 \text{ GHz}$	<-70 dBc
	$8 \text{ GHz} \leq f < 16 \text{ GHz}$	<-64 dBc
	$16 \text{ GHz} \leq f < 26 \text{ GHz}$	<-58 dBc
	$26.5 \text{ GHz} \leq f < 40 \text{ GHz}$	<-52 dBc
	$f \geq 40 \text{ GHz}$	<-52 dBc, nominal
	f = receive frequency	

Level display		
Screen		625 × 500 pixel (one diagram), max. 2 diagrams with independent settings
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces	1 measurement diagram	3
	2 measurement diagrams	6
Trace detector		Max Peak, Min Peak, Auto Peak (normal), Sample, RMS, Average, Quasi Peak
Number of measurement points	default value	625
	range	155 to 30001 in steps of about a factor of 2
Trace functions		Clear/Write, MaxHold, MinHold, Average
Trace update rate	local measurement, display update rate, 625 points, zero span	80/s
	remote measurement, display OFF: zero span/sweep time 1 ms	
	span = 10 MHz, sweep time 2.5 ms	70/s
		50/s
Setting range of reference level	logarithmic level display	-130 dBm to (+5 dBm + RF attenuation), max. 30 dBm, in steps of 0.1 dB
	linear level display	7.0 nV to 7.07 V in steps of 1 %
Units of level axis	logarithmic level display	dBm, dB μ V, dBmV, dB μ A, dBpW
	linear level display	μ V, mV, μ A, mA, pW, nW

Level measurement uncertainty		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level -30 dBm, reference level -30 dBm, RF attenuation 10 dB	<0.2 dB ($\sigma = 0.07$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation ≥10 dB	
	+20 °C to +30 °C	
	10 MHz ≤ f < 3.6 GHz	<0.3 dB ($\sigma = 0.1$ dB)
	3.6 GHz ≤ f < 8 GHz, span < 1 GHz	<1.5 dB ($\sigma = 0.5$ dB)
	8 GHz ≤ f < 22 GHz, span < 1 GHz	<2 dB ($\sigma = 0.7$ dB)
	22 GHz ≤ f < 40 GHz, span < 1 GHz	<2.5 dB ($\sigma = 0.8$ dB)
	40 GHz ≤ f < 50 GHz, span < 1 GHz	<3 dB ($\sigma = 1.0$ dB)
	RF attenuation > 40 dB or $f \geq 3.6$ GHz, span ≥ 1 GHz	add 0.5 dB to above values
	+5 °C to +45 °C	
	10 MHz ≤ f < 3.6 GHz	<0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz ≤ f < 26.5 GHz	add 0.5 dB to above values
	$f \geq 26.5$ GHz	add 1.0 dB to above values
	RF attenuation > 40 dB or $f \geq 3.6$ GHz, span ≥ 1 GHz	add 0.5 dB to above values
Attenuator switching uncertainty	$f = 128$ MHz 0 dB to 70 dB, referenced to 10 dB attenuation	<0.2 dB ($\sigma = 0.07$ dB)
Uncertainty of reference level setting	RF attenuation 10 dB, referenced to -10 dBm reference level setting	<0.15 dB ($\sigma = 0.05$ dB)

Display nonlinearity	+20 °C to +30 °C, mixer level ≤ –10 dBm	
Logarithmic level display	RBW ≤ 100 kHz or channel filters, S/N > 20 dB	
	0 dB to –70 dB	<0.1 dB ($\sigma = 0.03$ dB)
	–70 dB to –90 dB	<0.3 dB ($\sigma = 0.1$ dB)
	200 kHz ≤ RBW ≤ 10 MHz, S/N > 16 dB	
	0 dB to –50 dB	<0.2 dB ($\sigma = 0.07$ dB)
	–50 dB to –70 dB	<0.5 dB ($\sigma = 0.17$ dB)
	RBW > 10 MHz, S/N > 16 dB	
	0 dB to –50 dB	<0.5 dB ($\sigma = 0.17$ dB)
Linear level display		5 % of reference level
Bandwidth switching error	referenced to RBW = 10 kHz	
	1 Hz to 100 kHz	<0.1 dB ($\sigma = 0.03$ dB)
	200 kHz to 3 MHz	<0.2 dB ($\sigma = 0.07$ dB)
	5 MHz to 50 MHz	<0.5 dB ($\sigma = 0.15$ dB)
	FFT filter 1 Hz to 3 kHz	<0.2 dB ($\sigma = 0.07$ dB)

Total measurement uncertainty		
	signal level 0 dB to –70 dB below reference level , S/N > 20 dB, 10dB ≤ RF attenuation ≤ 40 dB, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C, mixer level ≤ –10 dBm	
	f < 3.6 GHz, RBW ≤ 100 kHz	0.3 dB
	f < 3.6 GHz, RBW > 100 kHz	0.5 dB
	3.6 GHz ≤ f < 8 GHz	1.2 dB
	8 GHz ≤ f < 22 GHz	1.5 dB
	22 GHz ≤ f < 40 GHz	1.8 dB
	40 GHz ≤ f < 50 GHz	2.2 dB

I/Q data

Interface	GPIB or LAN interface	
Sample rate		programmable 10 kHz to 81.6 MHz in 0.1 Hz steps
Memory length		max. 16Msample each for I and Q data
ADC resolution		14 bit

RF Path		
Max. information bandwidth		10 MHz
Spurious	Full scale input signal	typ. <–70 dBc
Third order distortion	Two tones –6 dBfs each	typ. <–80 dBc
LO feedthrough	$f_{I/Q} = 81.6$ MHz – f_{center} mixer level = –10dBm	typ. <–65 dBfs
Aliased DC offset	$f_{I/Q} = 20.4$ MHz; within ±10 K temperature change after I/Q or total calibration	typ. <–65 dBfs

Frequency response		
Equalized bandwidth	RBW setting sample rate	equalized bandwidth
	3 MHz	2 MHz
	5 MHz	3 MHz
	10 MHz	7 MHz
Amplitude flatness	within equalized bandwidth	
	$f \leq 3.6$ GHz	typ. <0.3 dB
	$f > 3.6$ GHz	typ. <0.5 dB
Deviation from linear phase	within equalized bandwidth	
	$f \leq 3.6$ GHz	typ. <0.1°
	$f > 3.6$ GHz	typ. <0.2°

Trigger functions

Trigger	
Trigger source	free run, video, external, IF level (mixer level 10 dBm to -50 dBm)
Trigger offset	span \geq 10 Hz
	span = 0 Hz
Max. deviation of trigger offset	$\pm(31.25 \text{ ns} + (0.1\% \times \text{trigger offset}))$
Gated sweep	
Gate source	external, IF level, video
Gate delay	1 μs to 100 s
Gate length	125 ns to 100 s, resolution min. 125 ns or 1 % of gate length
Max. deviation of gate length	$\pm(31.25 \text{ ns} + (0.05\% \times \text{gate length}))$

Inputs and outputs (front panel)

RF input	
Impedance	50 Ω
Connector	R&S®FSUP8 R&S®FSUP26 R&S®FSUP50
VSWR	RF attenuation \geq 10 dB, DC-coupled $f < 3.6 \text{ GHz}$ R&S®FSUP8 $3.6 \text{ GHz} \leq f < 8 \text{ GHz}$ R&S®FSUP26; R&S®FSUP50 $3.6 \text{ GHz} \leq f < 18 \text{ GHz}$ $18 \text{ GHz} \leq f < 26.5 \text{ GHz}$ $26.5 \text{ GHz} \leq f < 40 \text{ GHz}$ $40 \text{ GHz} \leq f \leq 50 \text{ GHz}$ RF attenuation $<$ 10 dB or AC coupling
Setting range of attenuator	0 dB to 75 dB, in 5 dB steps

Probe power supply	
Supply voltages	+15 V DC, -12.6 V DC and ground, max. 150 mA, nominal

Power supply for antennas, etc.	
Supply voltages	$\pm 10 \text{ V}$ and ground, max. 100 mA, nominal

DC ports 1 and 2	
Supply voltages	0 V to 12 V, max. 500 mA, nominal

Tuning ports 1 and 2	
Supply voltages	-10 V to 28 V, max. 20 mA, nominal

AUX port	
Supply voltages	-10 V to 0 V, max. 500 mA, nominal

Keyboard connector	
AF output	PS/2 female for MF-2 keyboard
Connector	3.5 mm mini jack
Output impedance	10 Ω
Open-circuit voltage	up to 1.5 V, adjustable
Power supply for noise source	
Output voltage	BNC female 0 V and 28 V, switchable, nominal

Inputs and outputs (rear panel)

IF 20.4 MHz		BNC female
Impedance		50 Ω
Bandwidth	RBW ≤ 30 kHz	1.67 × resolution bandwidth, min. 2.6 kHz
	RBW = 50 kHz, 100 kHz	400 kHz
	200 kHz ≤ RBW ≤ 10 MHz	equal to resolution bandwidth
Level	RBW ≤ 100 kHz, FFT filter, mixer level >−70 dBm	−20 dBm at reference level
	RBW = 200 kHz to 10 MHz, mixer level >−50 dBm	0 dBm at reference level

IF 404.4 MHz	active only if RBW > 10 MHz	BNC female
Impedance		50 Ω
Bandwidth	RBW > 10 MHz	equal to resolution bandwidth
Level	mixer level ≤ 0 dBm	typ. −10 dB

Video output		BNC female
Impedance		50 Ω
Output voltage	RBW ≥ 200 kHz, logarithmic scaling, full scale	0 V to 1 V (EMF)

Reference output		BNC female
Impedance		50 Ω
Output frequency		10 MHz
Level		>0 dBm, nominal

Reference input		BNC female
Impedance		50 Ω
Input frequency range		1 MHz ≤ f _{in} ≤ 20 MHz, in 1 Hz steps
Required level		>0 dBm into 50 Ω

Sweep output		BNC female
Output voltage		0 V to 5 V, proportional to displayed frequency

External trigger/gate input		BNC female
Trigger voltage		1.4 V (TTL)
Input impedance		≥10 kΩ

IEC/IEEE bus control		interface in line with IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0 or HP8566 compatible
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0
LAN interface		10/100BaseT, RJ-45
USB interface		type A plug, version 1.1
Serial interface		RS-232-C (COM), 9-pin female connectors
Printer interface		parallel (Centronics compatible)
Mouse interface		PS/2 compatible
Connector for external monitor (VGA)		15-pin D-Sub

General data

Display	21 cm LC TFT color display (8.4")
Resolution	800 × 600 pixel (SVGA resolution)
Pixel failure rate	<1 × 10 ⁻⁵

Mass memory	
Mass memory	1.44 Mbyte, 3 ½" disk drive, hard disk, USB flash disk (not supplied)
Data storage	>500 instrument settings and traces

Environmental conditions		
Temperature	operating temperature range permissible temperature range	+5 °C to +40 °C 0 °C to +50 °C
Climatic loading		+40 °C at 95 % relative humidity (EN 60068-2-30: 2000-02)

Mechanical resistance		
Vibration, sinusoidal		5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6: 1996-05, EN 60068-2-30: 2000-02, EN 61010-1, MIL-T-28800D, class 5
Vibration, random		10 Hz to 100 Hz, acceleration 1 g (RMS)
Shock		40 g shock spectrum, in line with MIL-STD-810C and MIL-T-28800D, classes 3 and 5
Recommended calibration interval	operation with external reference operation with internal reference	2 years 1 year
RFI suppression		in line with EMC directive of EU (89/336/EEC) and German EMC legislation

Power supply		
AC supply		100 V to 240 V, 3.1 A to 1.3 A, 50 Hz to 400 Hz, class of protection I in line with VDE 411
Power consumption	R&S®FSUP8 R&S®FSUP26, R&S®FSUP50	typ. 130 VA typ. 150 VA
Safety		in line with EN 61010-1, UL 3111-1, CSA C22.2 No. 1010-1, EN 61010-1
Test mark		VDE, GS, CSA, CSA-NRTL
Dimensions	W × H × D	435 mm × 192 mm × 460 mm (17.13 in × 7.56 in × 18.11 in)
Weight (without options) ⁶	R&S®FSUP8 R&S®FSUP26 R&S®FSUP50	17.6 kg (38.8 lb) 18.1 kg (39.9 lb) 18.6 kg (41 lb)

⁶ If the instrument is equipped with the R&S®FSUP-B60 option, 1.2 kg have to be added.

**R&S®FSUP-B21 option: LO/IF ports for external mixers
(for R&S®FSUP26 and R&S®FSUP50 only)**

LO signal		
Frequency range		7 GHz to 15.5 GHz
Level	+20 °C to +30 °C	+15.5 dBm ±1 dB
	+5 °C to +40 °C	+15.5 dBm ±3 dB

IF input		
IF frequency		404.4 MHz
Full scale level	2-port mixer (LO output/IF input, front panel)	-20 dBm
	3-port mixer (IF input, front panel)	-20 dBm
Level uncertainty	IF input level -30 dBm, RBW 30 kHz, 2-port mixer, LO output/IF input (front panel)	
	+20 °C to +30 °C	<1 dB
	+5 °C to +40 °C	<3 dB
	3-port mixer, IF input (front panel)	
	+20 °C to +30 °C	<1 dB
	+5 °C to +40 °C	<3 dB

Inputs and outputs (front panel)		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

**R&S®FSU-B23 option: RF preamplifier
(for R&S®FSUP26 only, requires R&S®FSU-B25)**

Level measurement uncertainty		
Frequency response	preamplifier = ON	
	3.6 GHz to 8 GHz	<2.0 dB ($\sigma = 0.7$ dB)
	8 GHz to 22 GHz	<2.5 dB ($\sigma = 0.8$ dB)
	22 GHz to 26.5 GHz	<3.0 dB ($\sigma = 1$ dB)

Displayed average noise level	0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sampling detector, trace average, sweep count = 20, mean marker	
	preamplifier = OFF	
	3.6 GHz to 8 GHz	R&S®FSUP26 specifications + 2 dB
	8 GHz to 26.5 GHz	R&S®FSUP26 specifications + 3 dB
	preamplifier = ON	
	3.6 GHz to 8 GHz	<-162 dBm, typ. -165 dBm
	8 GHz to 13 GHz	<-159 dBm, typ. -162 dBm
	13 GHz to 18 GHz	<-157 dBm, typ. -160 dBm
	18 GHz to 22 GHz	<-154 dBm, typ. -159 dBm
	22 GHz to 26.5 GHz	<-150 dBm, typ. -155 dBm

R&S®FSU-B25 option: electronic step attenuator

Frequency		
Frequency range	R&S®FSUP8	100 kHz to 8 GHz
	R&S®FSUP26	100 kHz to 3.6 GHz
	R&S®FSUP50	100 kHz to 3.6 GHz
Setting range		
Electronic attenuator		0 dB to 30 dB, in 5 dB steps
Preamplifier		20 dB, switchable
Level measurement uncertainty		
Frequency response	with preamplifier or electronic attenuator	
	10 MHz to 50 MHz	<1 dB ($\sigma = 0.34$ dB)
	50 MHz to 3.6 GHz	<0.6 dB ($\sigma = 0.2$ dB)
	3.6 MHz to 8 GHz	<2 dB ($\sigma = 0.7$ dB)
Reference error	at 128 MHz, RBW \leq 100 kHz, reference level -30 dBm, RF attenuation 10 dB	
	electronic attenuator	<0.3 dB ($\sigma = 0.1$ dB)
	preamplifier	<0.3 dB ($\sigma = 0.1$ dB)
Displayed average noise level		
With the R&S®FSU-B25 built in, the average noise level values displayed by the base unit degrade by:	0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sampling detector, trace average, sweep count = 20, mean marker	
	preamplifier = ON	
	R&S®FSUP8, R&S®FSUP26	
	10 MHz to 2 GHz	<-162 dBm
	2 GHz to 3.6 GHz	<-160 dBm
	R&S®FSUP8	
	3.6 GHz to 8 GHz	<-157 dBm
	R&S®FSUP50	
	10 MHz to 40 MHz	<-160 dBm
	40 MHz to 2 GHz	<-162 dBm
	2 GHz to 3.6 GHz	<-160 dBm
	preamplifier = OFF, electronic attenuator = OFF	
	20 Hz to 3.6 GHz	1 dB
	R&S®FSUP8	
	3.6 GHz to 8 GHz	2 dB
	preamplifier = OFF, electronic attenuator = 0 dB	
Intermodulation	20 Hz to 3.6 GHz	typ. 2.5 dB
	R&S®FSUP8	
	3.6 GHz to 8 GHz	typ. 3.5 dB
Third-order intercept point (TOI)		
Third-order intercept point (TOI)	electronic attenuator = ON, $\Delta f > 5 \times$ RBW or 10 kHz	
	10 MHz to 300 MHz	>17 dBm
	300 MHz to 3.6 GHz	>20 dBm
	3.6 GHz to 8 GHz	>18 dBm

Ordering information

Designation	Type	Order No.
Signal Source Analyzer, 20 Hz to 8 GHz	R&S®FSUP8	1166.3505.08
Signal Source Analyzer, 20 Hz to 26.5 GHz	R&S®FSUP26	1166.3505.26
Signal Source Analyzer, 20 Hz to 50 GHz	R&S®FSUP50	1166.3505.50
Accessories supplied		
Power cable, printed quick start guide, CD-ROM (with operating manual and service manual)		
R&S®FSUP26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connector		
R&S®FSUP50: test port adapter with 2.4 mm female (1088.1627.02) and N female (1036.4777.00) connector		

Options

Designation	Type	Order No.	Retrofittable	Remarks
Options				
Low-Aging OCXO	R&S®FSU-B4	1144.9000.02	yes	
External Generator Control	R&S®FSP-B10	1129.7246.02	yes	
LO/IF Ports for External Mixers	R&S®FSUP-B21	1157.1090.04	yes	for R&S®FSUP26 and R&S®FSUP50 only
20 dB Preamplifier, 3.6 GHz to 26.5 GHz	R&S®FSU-B23	1157.0907.02	no	for R&S®FSUP26 only, requires R&S®FSU-B25
Electronic Attenuator, 0 dB to 30 dB, and 20 dB Preamplifier (3.6 GHz)	R&S®FSU-B25	1044.9298.02	yes	
Trigger Port	R&S®FSU-B28	1162.9915.02	yes	
Low Phase Noise	R&S®FSU-B60	1169.5544.02	yes	
Firmware/software				
Power Sensor Measurements	R&S®FS-K9	1157.3006.02		
Application Firmware for Noise Figure and Gain Measurements	R&S®FS-K30	1300.6508.02		preamplifier (e.g. R&S®FSU-B25) recommended
GSM/EDGE Application Firmware	R&S®FS-K5	1141.1496.02		
Application Firmware for Bluetooth® Measurements	R&S®FS-K8	1157.2568.02		
Power Sensor Measurements	R&S®FS-K9	1157.3006.02		
Noise Figure Measurements	R&S®FS-K30	1300.6508.02		
General purpose vector signal analysis	R&S®FSQ-K70	1161.8038.02		this option is available for R&S®FSUP8 as of S/N 100024, R&S®FSUP26 as of S/N 100068, R&S®FSUP50 as of S/N 100013
WCDMA 3GPP Application Firmware BTS	R&S®FS-K72	1154.7000.02		
WCDMA 3GPP Application Firmware UE	R&S®FS-K73	1154.7252.02		
WCDMA 3GPP HSDPA Application Firmware UE	R&S®FS-K74	1300.7156.02		
3GPP TD-SCDMA BTS Application Firmware	R&S®FS-K76	1300.7291.02		
3GPP TD-SCDMA MS Application Firmware	R&S®FS-K77	1300.8100.02		
CDMA2000®/IS-95(cdmaOne)/1xEV-DV BTS Application Firmware	R&S®FS-K82	1157.2316.02		
CDMA2000®/1xEV-DV MS Application Firmware	R&S®FS-K83	1157.2416.02		
1xEV-DO BTS Application Firmware	R&S®FS-K84	1157.2851.02		
1xEV-DO MS Application Firmware	R&S®FS-K84	1300.6689.02		

Recommended extras

Designation	Type	Order No.
IEC/IEEE Bus Cable, 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-411	1096.3283.00
Adapter for mounting on telescopic rails (only with R&S®ZZA-411 adapter)	R&S®ZZA-T45	1109.3774.00
Matching pads, 50/75 Ω		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
High-power attenuators		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.XX (XX = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.XX (XX = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Connectors and cables		
Probe power connector, 3-pin		1065.9480.00
DC blocks		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
External harmonic mixers (for R&S®FSUP26, R&S®FSUP50 with R&S®FSU-B21 option)		
Harmonic Mixer, 40 GHz to 60 GHz	R&S®FS-Z60	1089.0799.02
Harmonic Mixer, 50 GHz to 75 GHz	R&S®FS-Z75	1089.0847.02
Harmonic Mixer, 60 GHz to 90 GHz	R&S®FS-Z90	1089.0899.02
Harmonic Mixer, 90 GHz to 110 GHz	R&S®FS-Z110	1089.0976.04
For R&S®FSUP26 only		
Test port adapter, N male		1021.0541.00
Test port adapter, 3.5 mm male		1021.0529.00
Microwave Measurement Cable with N male and 3.5 mm male test port adapter set	R&S®FSE-Z15	1046.2002.02
For R&S®FSUP50 only		
Test port adapter, N male		1036.4783.00
Test port adapter, K female		1036.4790.00
Test port adapter, K male		1036.4802.00

Specifications apply under the following conditions: 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and all internal automatic adjustments performed. "Typical values" are designated with the abbreviation "typ." These values are verified during the final test but are not assured by Rohde & Schwarz. "Nominal values" are design parameters that are not assured by Rohde & Schwarz. These values are verified during product development but are not specifically tested during production.

Service you can rely on

- | In 70 countries
- | Person-to-person
- | Customized and flexible
- | Quality with a warranty
- | No hidden terms

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Regional contact

Europe, Africa, Middle East

+49 1805 12 42 42* or +49 89 4129 137 74

customersupport@rohde-schwarz.com

North America

+1-888-TEST-RSA (1-888-837-8772)

customer.support@rsa.rohde-schwarz.com

Latin America

+1-410-910-7988

customersupport.la@rohde-schwarz.com

Asia/Pacific

+65 65 13 04 88

customersupport.asia@rohde-schwarz.com

Certified Quality System
ISO 9001
DQS REG. NO 1954 QM

Certified Environmental System
ISO 14001
DQS REG. NO 1954 UM

For product brochure,
see PD 5213.6729.12
and www.rohde-schwarz.com
(search term: FSUP)

Rohde & Schwarz GmbH & Co. KG

Mühldorfstraße 15 | 81671 München

Phone +498941290 | Fax +4989412912164

www.rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (ch)
PD 5213.6729.22 | Version 04.00 | April 2008 | R&S®FSUP
Data without tolerance limits is not binding | Subject to change

*0.14 €/min within German wireline network; rates may vary in other networks (wireline and mobile) and countries.