



ROHDE & SCHWARZ

Test and Measurement
Division

Service Manual

VECTOR SIGNAL GENERATOR

SMIQ02B/03B/04B/06B

10125.5555.02/03/04/06

Volume 2
Service manual consists of 4 volumes









Printed in the Federal
Republic of Germany

Safety Instructions

This unit has been designed and tested in accordance with the EC Certificate of Conformity and has left the manufacturer's plant in a condition fully complying with safety standards.

To maintain this condition and to ensure safe operation, the user must observe all instructions and warnings given in this operating manual.

Safety-related symbols used on equipment and documentation from R&S:

							
Observe operating instructions	Weight indication for units >18 kg	PE terminal	Ground terminal	Danger! Shock hazard	Warning! Hot surfaces	Ground	Attention! Electrostatic sensitive devi- ces require special care

1. The unit may be used only in the operating conditions and positions specified by the manufacturer. Unless otherwise agreed, the following applies to R&S products:
IP degree of protection 2X, Pollution severity 2, overvoltage category 2, altitude max. 2000 m.
The unit may be operated only from supply networks fused with max. 16 A.
2. For measurements in circuits with voltages $V_{max} > 30$ V, suitable measures should be taken to avoid any hazards.
(using, for example, appropriate measuring equipment, fusing, current limiting, electrical separation, insulation).
3. If the unit is to be permanently wired, the PE terminal of the unit must first be connected to the PE conductor on site before any other connections are made. Installation and cabling of the unit to be performed only by qualified technical personnel.
4. For permanently installed units without built-in fuses, circuit breakers or similar protective devices, the supply circuit must be fused such as to provide suitable protection for the users and equipment.
5. Prior to switching on the unit, it must be ensured that the nominal voltage set on the unit matches the nominal voltage of the AC supply network.
If a different voltage is to be set, the power fuse of the unit may have to be changed accordingly.
6. Units of protection class I with disconnectible AC supply cable and appliance connector may be operated only from a power socket with earthing contact and with the PE conductor connected.
7. It is not permissible to interrupt the PE conductor intentionally, neither in the incoming cable nor on the unit itself as this may cause the unit to become electrically hazardous.
Any extension lines or multiple socket outlets used must be checked for compliance with relevant safety standards at regular intervals.
8. If the unit has no power switch for disconnection from the AC supply, the plug of the connecting cable is regarded as the disconnecting device. In such cases it must be ensured that the power plug is easily reachable and accessible at all times (length of connecting cable approx. 2 m). Functional or electronic switches are not suitable for providing disconnection from the AC supply.
If units without power switches are integrated in racks or systems, a disconnecting device must be provided at system level.
9. Applicable local or national safety regulations and rules for the prevention of accidents must be observed in all work performed.
Prior to performing any work on the unit or opening the unit, the latter must be disconnected from the supply network.
Any adjustments, replacements of parts, maintenance or repair may be carried out only by authorized R&S technical personnel.
Only original parts may be used for replacing parts relevant to safety (eg power switches, power transformers, fuses). A safety test must be performed after each replacement of parts relevant to safety.
(visual inspection, PE conductor test, insulation-resistance, leakage-current measurement, functional test).

continued overleaf

Safety Instructions

10. Ensure that the connections with information technology equipment comply with IEC950 / EN60950.

11. Lithium batteries must not be exposed to high temperatures or fire.

Keep batteries away from children.

If the battery is replaced improperly, there is danger of explosion. Only replace the battery by R&S type (see spare part list).

Lithium batteries are suitable for environmentally-friendly disposal or specialized recycling. Dispose them into appropriate containers, only.

Do not short-circuit the battery.

12. Equipment returned or sent in for repair must be packed in the original packing or in packing with electrostatic and mechanical protection.

13. Electrostatics via the connectors may damage the equipment. For the safe handling and operation of the equipment, appropriate measures against electrostatics should be implemented.

14. Any additional safety instructions given in this manual are also to be observed.

Contents

Volume 1

6 Repair Instruction

7 Testing and Repair of Modules

Front Module with Controller MOD 10	Register 1
Reference/Step Synthesis (SMIQ02B/03B only).....	Register 2
Digital Synthesis	Register 3
Summing Loop (SMIQ02B/03B only)	Register 4

Volume 2

7 Testing and Repair of Modules

6 GHz Extension	Register 1
I/Q Converter MOD 04.....	Register 2
I/Q Modulator MOD 08	Register 3

Volume 3

7 Testing and Repair of Modules

Attenuator 3 GHz.....	Register 1
N/D Simulator	Register 2
Power Supply	Register 3
Fan Unit.....	Register 4
Connector board.....	Register 5
Option Reference Oscillator OCXO SM-B1	Register 6
Option FM-Modulator SM-B5 (SMIQ02B/03B only).....	Register 7

Volume 4

7 Testing and Repair of Modules

Option Modulation Coder SMIQ-B20.....	Register 1
Options Data Generator SMIQ-B11 and Memory Extension SMIQ-B12.....	Register 2
Option Fading Simulator SMIQ-B14 and SMIQ-B15 (SMIQ02B/03B only).....	Register 3



ROHDE & SCHWARZ

SERVICE DOCUMENTS

E 6 GHZ Board

1084.9600.00

Contents

7	Testing and Repair of the Board	4
7.1	Function Description	4
7.1.1	Input REF600	4
7.1.2	Input IQ300	4
7.1.3	IF900 - IF Signal of Mixer2	5
7.1.4	LO Conditioning for Mixer 1	5
7.1.5	RF Path at IF Output of Mixer1	5
7.1.6	Filter Bank	5
7.1.7	RF Level Control	6
7.1.8	Diagnosis	6
7.2	Measuring Instruments and Auxiliary Means	6
7.3	Troubleshooting	6
7.3.1	RF Level	7
7.3.2	Spectral Purity of Output Signal IQOUT6'	8
7.4	Testing and Adjustment	8
7.4.1	Testing the Data Transmission	8
7.4.2	Testing the Reference Voltages	9
7.4.3	Testing the Operating Points of the Amplifier Stages ..	9
7.4.4	Testing the Switching Voltages of RFSWITCH 1	10
7.4.5	Testing the Switching Voltages of RFSWITCH 2	10
7.4.6	Testing the Tuning Voltages	10
7.4.7	Testing the RF Signal Paths	11
7.4.8	Adjusting the Drain Current of A510 in the POWER UNIT..	11
7.4.9	Adjusting the Reference 10 V	11
7.4.10	RF-DC-ZERO Adjustment at Output Detector	11
7.4.11	Adjusting the RF Level Linearity	12
7.4.12	Adjusting the IF900 Level	12
7.4.13	Calibration of the Tunable Filters	12
7.4.14	Tables and Interfaces	12
7.4.14.1	Diagnosis	12
7.4.14.2	Serial Data (Subaddress 1)	15
7.5	Disassembly and Assembly	16
7.6	External Interfaces	17

Parts list
Coordinates list
Circuit diagram
Component location plan

7. Testing and Repair of the Board

7.1. Function Description

The E6GHZ board extends the frequency range of the SMIQ03 by the range 3300 to 6400 MHz.

The IQ300 signal at X504 from the IQMOD module (300 MHz, IQ-modulated) is up-converted to 900 MHz using MIXER2 (IF900). Unwanted mixer products at the output of MIXER2 are filtered off by means of bandpass filters.

The REF600 signal at X502 from the reference/step synthesis (600 MHz) is doubled and serves as LO for MIXER2 (1200 MHz).

MIXER1 converts IF900 to the range 3300 to 6400 MHz. The LO signal (4200 to 6000 MHz) for MIXER1 is generated by doubling the FIQOUT signal of the IQMOD at X505.

Unwanted mixer products at the output of MIXER1 are suppressed by means of bandpass filters and a switched filter bank containing bandpass filters and tunable highpass and lowpass filters in 4 paths.

A level control element (LEVEL PRESET) preceding the filter bank permits to set the operating point of the amplitude modulator (instrument calibration routine Level Preset). Following the filter bank, the output level of the instrument is set by the amplitude modulator.

The thin-film unit POWERUNIT includes the output stage and a detector, which detects the output level of the instrument for the frequency range 3300 to 6400 MHz. There, the signal from the IQMOD (FIQOUT at X505) is also directly through-connected to the module output (IQOUT6 at X506) for frequencies < 3300 MHz.

7.1.1. Input REF600

The REF600 signal at X502 (600 MHz, 13 dBm) is split up via a power divider, taken via an amplifier and again provided as output signal at X501 REF600E for IQMOD (600 MHz, 13 dBm) and doubled as LO signal for MIXER2 to 1200 MHz, filtered and amplified to a controlled LO level of 17 dBm.

7.1.2. Input IQ300

The IQ300 signal at X504 (300 MHz, -9 dBm) is split up via a power divider, taken via an amplifier and again provided as output signal at X503 IQ300AUX (300 MHz, -9 dBm) and is used as RF signal for MIXER2 (level -12 dBm).

7.1.3. IF900 - IF Signal of Mixer2

The IF signal of MIXER2 (900 MHz) is filtered and amplified and taken to the RF connector of MIXER1 (level -12 dBm). The RF level at X2 is adjusted to -12 dBm by means of LEVEL IF900 (R848).

7.1.4. LO Conditioning for Mixer 1

For LO conditioning, the FIQOUT signal is doubled by the POWERUNIT at X9 from 2100 to 3000 MHz to 4200 to 6000 MHz. For suppression of subharmonics, the lowpass filter LP5100 is cut in at frequencies at FIQOUT < 5100 MHz. A level control ensures a constant LO level at X1 (17 dBm).

7.1.5. RF Path at IF Output of Mixer1

The mixer output signal (-18 dBm) is taken via amplifiers and filters to the level preset control element and via the filter bank and the AM modulator to the input X6 of the POWERUNIT. The amplifier stages have a gain (S21) of approx. 8 dB each, thus compensating for the filter attenuations.

7.1.6. Filter Bank

The tunable filters are set according to the frequency; the necessary data is determined in the module test in the production and contained in the EEPROM of the module.

Each tracking filter is driven by a tuning voltage. IQFILT1 and IQFILT2 drive the lowpass filters, IQFILH1 and IQFILH2 the highpass filters. In the deactivated filter paths, the respective lowpass filters are set to minimum and the highpass filters to maximum tuning voltage via selector switches (0 or 20 V).

The four control bits FILOFF1 to FILOFF4 check the selector switches and the ON/OFF functions of the filter paths.

There are four frequency ranges:

Frequency range	SMIQ output frequency	FIQOUT from IQMOD	LO frequency Mixer 1	Sideband	Control signal LP5100_ON
FB1	3300 to 4200 MHz	2100 to 2550 MHz	4200 to 5100 MHz	lower	L
FB2	4200 to 5100 MHz	2550 to 3000 MHz	5100 to 6000 MHz	lower	H
FB3	5100 to 6000 MHz	2100 to 2550 MHz	4200 to 5100 MHz	upper	L
FB4	6000 ... 6400 MHz	2550 ... 2750 MHz	5100 ... 5500 MHz	upper	H

7.1.7. RF Level Control

The command value for the amplitude modulation ($f > 3.3$ GHz) and the level control is applied to the module via X500.A2 UREFAM. At frequencies < 3.3 GHz, the control bit AM_ON switches over to a command value generated on the module, since the amplitude modulation is already generated on the IQMOD module. The temperature-compensated and linearized detector output voltage is applied as actual value to the control amplifier N29, which drives the AM modulator.

The level linearity is adjusted using trimmers RF DC ZERO (R394) and DETECTOR OFFSET (R173). The nominal value for the level control is set via D/A converter D2. The control bandwidth is switched over via control bit AM_SLOW_ON. For the IQ mode or in the operating mode "ALC OFF MODE TABLE", the AM modulator is controlled by the level D/A converter (ALC_ON = Low, DETOUT_ON = Low), N29 will then operate as amplifier.

7.1.8. Diagnosis

Diagnosis voltages determined via RF rectifiers feature large tolerances and can only be used as indicators (RF level present / not present). RF test points without directional couplers do not detect the forward power, but the RF voltage, which is to a large extent dependent on the matching (impedance) and therefore features large fluctuations versus the frequency.

7.2. Measuring Instruments and Auxiliary Means

- DC voltmeter, ammeter (e.g. UDS5)
- RF power meter (e.g. NRVD)
- RF spectrum analyzer up to 20 GHz (e.g. FSM)
- RF network analyzer up to 8 GHz (e.g. ZVC)

7.3. Troubleshooting

For first error diagnosis it is recommended to use the test program included in the service kit, which offers comprehensive possibilities.

Before starting more detailed troubleshooting in the RF paths, it is recommended to check the serial interface for correct data transmission and the diagnosis, reference, operating point and control voltages for the correct value.

7.3.1. RF Level

Error message:

ALC LOOP FAILURE

First check at which frequencies the level control does not work. To this end, check the frequency ranges FB1 to FB4 of the filter bank.

No level

Check control voltages of the LO level control loops.

or

**fault during
Level Preset calibration
at frequencies > 3.3 GHz**

Check diagnosis voltages of the RF test points.

Check detector and control amplifier.

Perform RF level adjustment

**Level cannot be varied at all
frequencies > 3.3 GHz**

Check detector, level D/A converter and control amplifier

**No level in only one frequency
range FB1 to FB4 of the filter
bank**

Fault at RF-SWITCH1 or RF-SWITCH2, missing or faulty control voltage of tunable filters. Check the RF chain of the filter bank using network analyzer

**Level linearity out of
tolerance**

Perform adjustment

7.3.2. Spectral Purity of Output Signal IQOUT6

Too small harmonics	Check operating point of RF amplifier in POWERUNIT, harmonics at X6, operating points of amplifiers in RF path.
Too small spurious responses at $f_{nw} = 0.5 * (f_{RF} \pm 900 \text{ MHz})$	Chip of switch or switch control in POWERUNIT faulty, braided cord in upper module cover in the area of the POWERUNIT missing.
Too small spurious responses at 300 MHz from carrier	LO level of MIXER1 is faulty, bandpass filters in the IF900-path faulty
Too small spurious responses at 600 kHz from carrier	Module cover does not fit tightly, bandpass filters in the LO 1200 path faulty
Too small spurious responses at 900 MHz from carrier	LO suppression by the tracking or permanent filters of the filter bank is insufficient. Determine the faulty frequency range of the filter bank FB1 to FB4, check the tuning voltages, measure from X4 to X8 using network analyzer.

7.4. Testing and Adjustment

All measured values with no tolerance indicated are meant to be understood as reference values.

Plug the board onto the adapter included in the service kit and set up the RF connections. The adapter can then be plugged into the chassis together with the board.

Before carrying out any tests, set the instrument to a defined initial status by means of PRESET.

7.4.1. Testing the Data Transmission

The board is addressed via the serial interface. Subaddress 1 is used for the data transmission, . Subaddress 2 is used for reading and writing to the EEPROM, which contains calibration data for the filter control.

Testing: When changing between the frequencies $f_1 < 3.3 \text{ GHz}$ and $f_2 > 3.3 \text{ GHz}$, the bit SWE6-ON at D14/4 must change between low and high.

7.4.2. Testing the Reference Voltages

Test point	Nominal value/V
X20.3	10 ± 0.010
X20.2	-10 ± 0.010
X20.1	4.55 ± 0.02

7.4.3. Testing the Operating Points of the Amplifier Stages

Use a DC voltmeter to check the voltages. Measure at the collector or drain connector.

Circuit diagram sheet	Amplifier	Component No.	Ic/mA	U/V
3	RFAMP23	N38	70	4.9 ± 0.1
3	RFAMP24	N39	70	4.9 ± 0.1
4	RFAMP25	V19	58	4.4 ± 0.1
4	RFAMP26	V20	58	4.4 ± 0.1
5	RFAMP27	V87	62	4.4 ± 0.1
5	RFAMP28	V91	127	4.7 ± 0.1
5	RFAMP28	V91/UG2		$-4 \dots -0.5$
6	RFAMP29	N3	80	4.8 ± 0.1
8	RFAMP30	N4	80	4.8 ± 0.1
9	RFAMP2	N15	100	5.25 ± 0.1
10	RFAMP3	N17	75	5 ± 0.1
12	RFAMP4	N14	83	2.8 ± 0.2
12	RFAMP5	V90	140	7.1 ± 0.1
13	RFAMP6	N25	80	3.4 ± 0.2
14	RFAMP7	V92	93	7.1 ± 0.1
14	RFAMP7	V92/Gate		$-2 \dots -0.5$
17	RFAMP9	N22	80	3.4 ± 0.2
18	RFAMP10	N23	80	3.4 ± 0.2
19	RFAMP11	N18	80	3.4 ± 0.2
20	RFAMP12	N19	80	3.4 ± 0.2
21	RFAMX16.1	N20	80	3.4 ± 0.2
22	RFAMP14	N21	80	3.4 ± 0.2
23	RFAMP15	N24	80	3.4 ± 0.2
24	RFAMP16	N9	80	3.4 ± 0.2
26	RFAMP19	V94	93	7.1 ± 0.1
27	RFAMP20	V95	93	7.1 ± 0.1
28	RFAMP22	N37		3.4 ± 0.2
29	POWER UNIT Vcc	P11	500	7.3 ± 0.2
29	POWER UNIT Vgg	P12		$-5 \dots -0.5$

7.4.4. Testing the Switching Voltages of RFSWITCH 1

Use a DC voltmeter to check the voltages. (Tolerance ± 0.3 V)

	Test point	Filter OFF	FB1 on	FB2 on	FB3 on	FB4 on
SYNFIL 0	C891	4.42	4.18	-1.65	-1.65	4.55
SYNFIL 1	C753	9.80	-0.76	9.80	9.80	9.80
SYNFIL 2	C892	-10.00	-10.00	3.30	-10.00	-10.00
SYNFIL 3	C757	9.83	9.83	9.83	-3.30	9.83
SYNFIL 4	C755	-10.03	-10.03	-10.03	-10.03	6.21


7.4.5. Testing the Switching Voltages of RFSWITCH 2

Use a DC voltmeter to check the voltages. (Tolerance ± 0.3 V)

	Test point	Filter OFF	FB1 on	FB2 on	FB3 on	FB4 on
SYNFIL 0N	C895	-1.67 V	-1.67 V	4.22 V	4.58 V	-1.67 V
SYNFIL 1N	C894	-9.82 V	3.34 V	-9.82 V	-9.82 V	-9.82 V
SYNFIL 2N	C899	9.97 V	9.97 V	-0.76 V	9.97 V	9.97 V
SYNFIL 3N	C898	-9.83 V	-9.83 V	-9.83 V	6.24 V	-9.83 V
SYNFIL 4N	C897	10.05 V	10.05 V	10.05 V	10.05 V	-3.32 V

7.4.6. Testing the Tuning Voltages

The diagram shows general characteristics of the tuning voltages. Individual calibration data may deviate from this curve; usually, there are deviations from the smooth tuning characteristics because of the calibration process. The upper curves show IQFILH1 and IQFILH2, the lower ones IQFILT1 and IQFILT2 (identical in this case). All 4 voltages can be read out via the diagnosis (Udiag = 20V * DACWERT/4095).

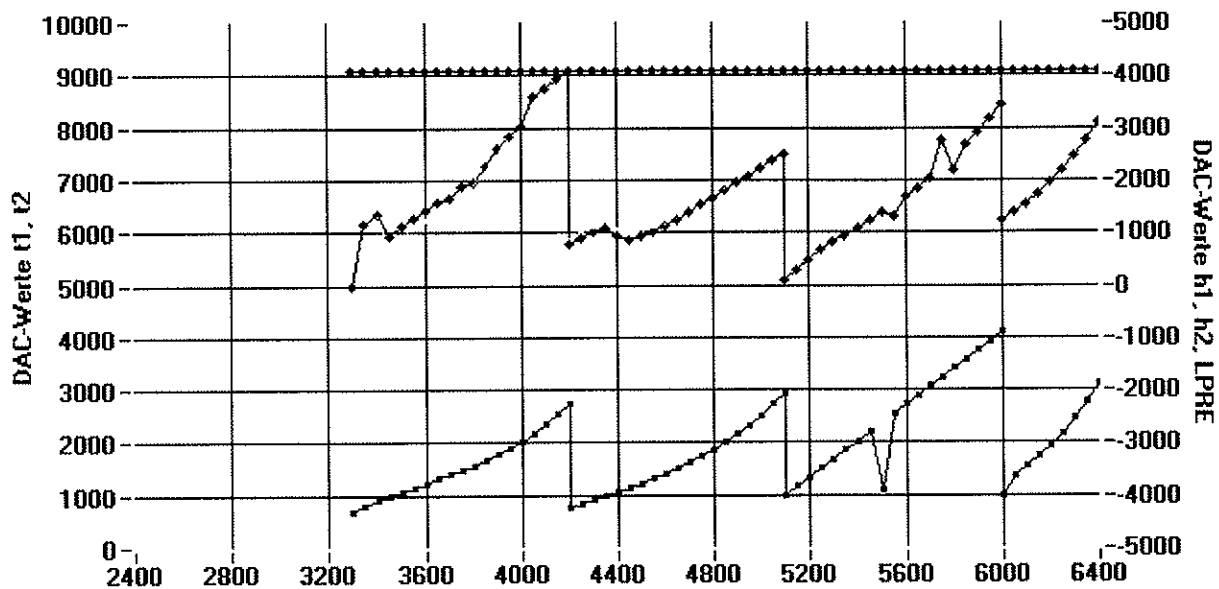

7.4.7. Testing the RF Signal Paths

The module accommodates SMP or MMCX test connectors X1 to X9. At these coaxial interfaces, matching and gain can be measured using a network analyzer, for example. For this purpose, the coupling capacitor, which is located at this place in the signal path, must be soldered from the desired input or output to the test connector. In addition to a number of coupling capacitors in the signal path, there are grounded through-connections (GND). There, it is possible, e.g. to solder in a coaxial cable and connect its inner conductors to the signal path. For specifications of nominal gain or nominal level please refer to the block diagram. S-parameter measurements in the frequency range 3 to 6 GHz require extensive equipment and knowledge. Therefore, such measurements should only be performed by trained personnel.

7.4.8. Adjusting the Drain Current of A510 in the POWER UNIT

Cut in the ammeter at X14.1 - X14.2.

Use trimmer R172 to adjust the current to 500 ± 5 mA.

7.4.9. Adjusting the Reference 10 V

Use trimmer R608 to adjust to $10 \text{ V} \pm 0.001 \text{ V}$ at the test point X20.4.

7.4.10. RF-DC-ZERO Adjustment at Output Detector

Remove jumper at X14.1-X14.2, set the voltage at X16.1 (reference X16.2) to $-17 \text{ mV} \pm 0.5 \text{ mV}$ using potentiometer R394, plug in the jumper at X14.1-X14.2.

7.4.11. Adjusting the RF Level Linearity

Instrument settings: PRESET, RF 3301 MHz, LEVEL 2.1 dBm, LEVEL/LEVEL/ATTENUATOR MODE FIXED.

Connect power sensor of power meter to RF connector of SMIQ. Save the measured value as reference value on the power meter and select the Δ dB display. Set LEVEL -18.1 dBm. Use potentiometer R173 to adjust the DETECTOR OFFSET to 20-dB drop on the power meter. By adjusting alternately using potentiometer R173 and potentiometer R394 (RF-DC-ZERO), the level deviation from the nominal value can be minimized in the level range -20 dBm to 13 dBm.

7.4.12. Adjusting the IF900 Level

Remove the module, unscrew the screening cover. Unsolder the coupling capacitor C663 from the signal path and solder in such that R625 is connected to X2.

Place the module onto the service adapter, set up the RF connections, install the adapter into the instrument. Make sure to allow for sufficient cooling of the module, since the cooling effect of the screening covers and the air current is missing.

Instrument setting PRESET, RF 3301 MHz.

Connect a power meter to X2 and measure the level (f = 900 MHz). Adjust the RF level at X2 to -12 dBm using LEVEL IF900 (R848).

7.4.13. Calibration of the Tunable Filters

The filters are calibrated in the factory in the module pretesting. This is necessary when replacing tuning diodes in the tunable filters or the EEPROM.

7.4.14. Tables and Interfaces

7.4.14.1. Diagnosis

RF: Diagnosis voltage determined via RF rectifier.


IR: Interrupt at processor when the permissible thresholds are exceeded.

TF: Division factor (corresponds to voltage divider ratio at test point).

Diagnosis multiplexer D27:						
Diag. point SMIQ	Test point	Type	IR	Umin/ Volt	Umax/ Volt	TF
10 2400	Reference 10 k Ω	DC		-10m	+10m	1
11 2401	VDETOUT Output level of module	RF		0	10	4
12 2402	UTEMP	DC		0	5	1
13 2403	Free					
14 2404	IQFILT1 tuning voltage LP tracking filter	DC		0	20	5
15 2405	IQFILT2 tuning voltage LP tracking filter	DC		0	20	5
16 2406	IQFILH1 tuning voltage HP tracking filter	DC		0	20	5
17 2407	IQFILH2 tuning voltage HP tracking filter	DC		0	20	5

Diagnosis multiplexer D25:						
Diag. point SMIQ	Test point	Type	IR	Umin/ Volt	Umax/ Volt	TF
20 2408	Control voltage for level preset	DC		0	10	3
21 2409	Level ahead of filter bank	RF		0		3
22 2410	Level ahead of AM Mod.	RF		0		3
23 2411	Level ahead of POWERUNIT	RF		0		3
24 2412	IF900 Level	RF		0		3
25 2413	AM control voltage	DC	IR	-15	15	3
26 2414	LO-MIXER1 control voltage	DC	IR	-15	15	3
27 2415	LO-MIXER2 control voltage	DC	IR	-15	15	3

Module temperature vs. Udiag12 (SMIQ diagnosis No. 2402):

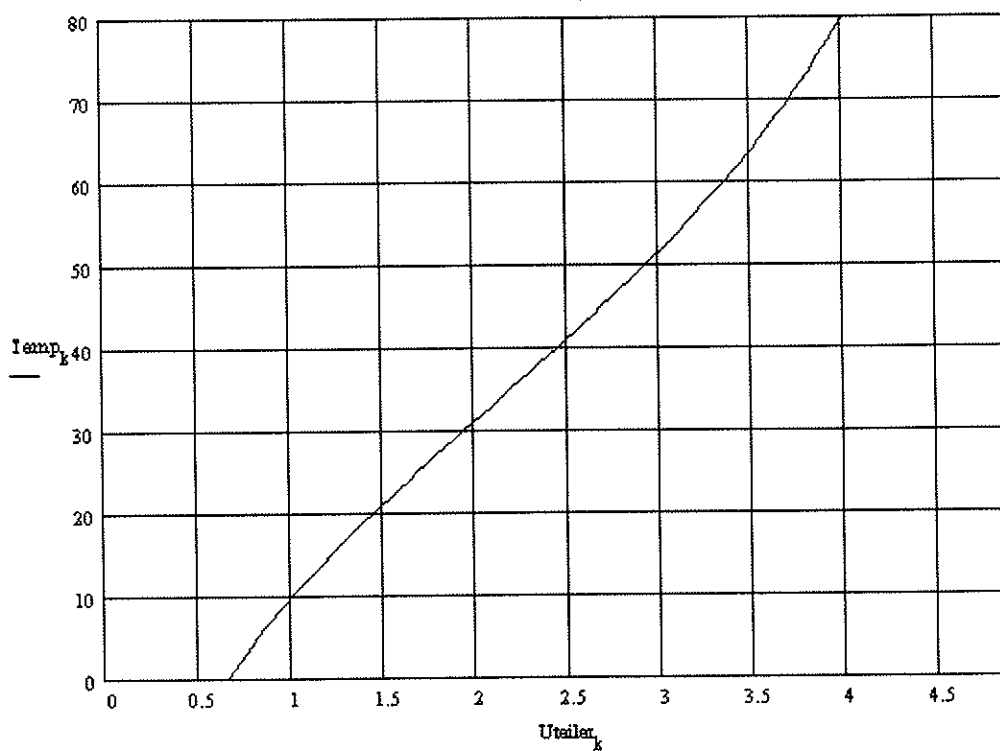

7.4.14.2. Serial Data (Subaddress 1)

Byte	Bit	Designation	Function	Control logic
11	7	free		HEX code: 0E 0D 0B 07 0F 1 1 1 0 1 1 1 0 1 1 1 0 1 1 1 0 1 1 1 1
	6	free		
	5	free		
	4	free		
	3	FILOFF4		
	2	FILOFF3		
	1	FILOFF2		
	0	FILOFF1		
10	7	IQFIL_H2	Tuning voltage	MSB
9	4	[12]	2 of highpasses	LSB
9	3	IQFIL_H1	Tuning voltage	MSB
8	0	[12]	1 of highpasses	LSB
7	7	IQFIL_T2	Tuning voltage	MSB
6	4	[12]	2 of lowpasses	LSB
6	3	IQFIL_T1	Tuning voltage	MSB
5	0	[12]	1 of lowpasses	LSB
4	7	BLANK_ENA	Function of BLANK line	1 active 0 deactivated
	6	BLANK_INV	Polarity of BLANK line	1 Blanking with BLANK = 0 0 Blanking with BLANK = 1
	5	DETOUR_ON	Switch for detector output	Detector connected to controller as actual value (ALC ON) 0 ALC OFF
	4	AM_SLOW	Switchover of ALC control bandwidth	1 ALC control bandwidth slow 0 ALC control bandwidth normal
	3	ALC_ON	Switchover between CW and IQ mode/ level control from table	1 ALC ON: Automatic level control on. 0 ALC OFF: Automatic level control off.
	2	AM_E6	Level reference voltage	1 AM signal from motherboard 0 6-V reference for RF level from module E6GHz
	1	LEV_OFF	Level reduction	1 Level off 0 Level on
	0	SWE6_ON	controls signal path in POWER UNIT	1 Frequency range 3.3 to 6.4 GHz 0 Frequency range 0.3 to 3300 MHz

Byte	Bit	Designation	Function	Control logic
3	7	LEVEL [12]	Level setting	Bit 11
2	4			Bit 0
2	3	LEVEL	Level	Bit 11
1	0	PRESET [12]	Preset	Bit 0
0	7	LOSYN_OFF	Switch for LO Mixer1	1 LO off (0.3 to 3300 MHz) 0 LO on (3.3 to 6.4 GHz)
	6	LO-MIXER2 _OFF	Switch for LO Mixer2	1 LO off (0.3 to 3300 MHz) 0 LO on (3.3 to 6.4 GHz)
	5	free	Selection diagnosis multiplexer	0 DMUX1 1 DMUX2 0 off 1 0 0
	4	DMUX_2		
	3	DMUX_1		
	2	AMUX_2	Address diagnosis multiplexer	MSB Address 0 to 7 LSB
	1	AMUX_1		
	0	AMUX_0		

7.5. Disassembly and Assembly

After opening the instrument, unlocking the module and loosening the RF connections, the module can be taken out of its slot. The screening covers of the module are fastened with screws; loosen the screws of the upper cover first and tighten them last.

For mounting the POWERUNIT observe the mounting instructions (see component location plan).

7.6. External Interfaces

Signal name	from module	Signal data	Remark
IQ300	IQMOD (IQAUX)	300 MHz \pm 50 MHz for IQ modulation -9 dBm \pm 0.1 dB 50 ohms S11 < -15 dB	
REF600	Reference/ step synthesis	600 MHz 13 dBm \pm 1 dB 50 ohms S11 < -15 dB	
VREFAM	IQMOD	DC ... 100 kHz 6 VDC \pm (AM * 6 V)	Modulation signal for AM
FIQOUT	IQMOD	<u>IQ/CW 0.3 to 3300 MHz</u> -15 to +16 dBm <u>CW 2100 to 3000 MHz</u> 13 dBm 50 ohms	<u>F \leq 3300 MHz:</u> IQMOD signal is through-connected to attenuator <u>F > 3300 MHz:</u> IQMOD in CW mode
	to module		
IQ300AUX	Instrument rear	300 MHz \pm 50 MHz for IQ modulation 50 ohms S11 < -15 dB S22 < -20 dB	IQ300 through- connected, P(IQ300) \pm 0.5 dB
REF600E	IQMOD	600 MHz from REF600 through- connected 50 ohms S22 < -15 dB	REF600 through- connected, P(REF600) \pm 0.5 dB
IQOUT6	Attenuator	<u>IQ/CW 0.3 to 3300 MHz:</u> -17 to +16 dBm <u>IQ 3300 to 6400 MHz:</u> -15 to +16 dBm 50 ohms S22 < -15 dB	through-connected signal, approx. 2 dB attenuation



ROHDE & SCHWARZ


**Schalteillisten
numerisch geordnet**

**Part lists
in numerical order**

**Listes des pièces détachées
par numéros de référence**


Comp. No.	Designation	Stock No.	Manufacturer	Description
	XX VARIANTENERKLAERUNG IDENTIFICATION OF MODELS			
A1	BD POWER UNIT	1084.9500.02		
C1	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C2	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C3	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C4	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*
C5	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C6	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C7	CE 33UF 20% 25V AL SMD SMD ELECTROLYTIC CAPACIT.	0009.5592.00	PANASONIC	EEV HB 1E 330P
C8	CE 33UF 20% 25V AL SMD SMD ELECTROLYTIC CAPACIT.	0009.5592.00	PANASONIC	EEV HB 1E 330P
C9	CC 3,9PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT
C10	CC 3,9PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT
C11	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT
C12	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C13	CC 12PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8256.00	MURATA	GRM39COG***F50ZPT
C16	CC 33PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3639.00	MURATA	GRM39COG***B50ZPT
C17	CC 5,6PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT
C18	CC 5,6PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT
C19	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C20	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR
C21	CC 5,6PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT
C22	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C23	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C24	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C25	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*
C26	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1R0 BAW TR
C27	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT
C28	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C29	CC 3,9PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT
C30	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C31	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C32	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C33	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT
C34	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C35	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT
C36	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C37	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C38	XX ENTHALTEN IN INCLUDED IN			

Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	877 3PLU	Äi	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	1+

VIT UNS AINE NEURIS VOT


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C39	CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
..41	SMD-CERAMIC-CAPACITOR				
C42	CB 220PF 25V 0,2A 1205	1085.2245.00	MURATA	NFM40R11C221	
..44	EMI SUPPRESSION FILTER				
C45	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
	SMD-CERAMIC-CAPACITOR				
C46	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
	SMD CERAMIC CAPACITOR				
C47	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
	SMD CERAMIC CAPACITOR				
C48	CB 220PF 25V 0,2A 1205	1085.2245.00	MURATA	NFM40R11C221	
	EMI SUPPRESSION FILTER				
C49	CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
..52	SMD-CERAMIC-CAPACITOR				
C53	CC 0,5PF+-0,05PF 0603	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
	SMD-CERAMIC CAPACITOR				
C54	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..64	SMD CERAMIC CAPACITOR				
C65	CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
..67	SMD-CERAMIC-CAPACITOR				
C68	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
	SMD-CERAMIC-CAPACITOR				
C69	CC 1,8PFO,1PF50V NPO 0603	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
	SMD-CERAMIC-CAPACITOR				
C70	CB 220PF 25V 0,2A 1205	1085.2245.00	MURATA	NFM40R11C221	
	EMI SUPPRESSION FILTER				
C71	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
	SMD-CERAMIC-CAPACITOR				
C72	CC 1,0PFO,1PF50V NPO 0603	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
	SMD-CERAMIC-CAPACITOR				
C73	CC 330PF+-5% 50V HDK 0603	CC 1097.6205.00	MURATA	GRM39X7R331J50PT	
	SMD CERAMIC CAPACITOR				
C74	CC 1,0NF+-10%50V HDK 0603	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
	SMD-CERAMIC-CAPACITOR				
C75	XX ENTHALTEN IN				
	INCLUDED IN				
C76	CC 0,3PF+-0,05PF 0603	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
	SMD-CERAMIC CAPACITOR				
C77	CC 0,3PF+-0,05PF 0603	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
	SMD-CERAMIC CAPACITOR				
C78	CC 0,4PF+-0,05PF 0603	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
	SMD-CERAMIC CAPACITOR				
C79	CC 1PF+-0,1PF50V COG0603	CC 0008.2060.00	AVX	0603 5J 1R0 BAW TR	
	SMD-CERAMIC CAPACITOR				
C80	CB 220PF 25V 0,2A 1205	1085.2245.00	MURATA	NFM40R11C221	
	EMI SUPPRESSION FILTER				
C81	CC 0,4PF+-0,05PF 0603	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
	SMD-CERAMIC CAPACITOR				
C82	CC 0,5PF+-0,05PF 0603	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
	SMD-CERAMIC CAPACITOR				
C83	CC 0,4PF+-0,05PF 0603	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
	SMD-CERAMIC CAPACITOR				
C84	CC 0,4PF+-0,05PF 0603	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
	SMD-CERAMIC CAPACITOR				
C85	XX ENTHALTEN IN				
	INCLUDED IN				
C86	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
..89	SMD-CERAMIC-CAPACITOR				
C90	CC 18PF+-1% 50VNPO 0603	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT	
	SMD-CERAMIC-CAPACITOR				
C91	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..94	SMD CERAMIC CAPACITOR				
C95	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
	SMD-CERAMIC-CAPACITOR				
C96	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..98	SMD CERAMIC CAPACITOR				
C99	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
	SMD CERAMIC CAPACITOR				
C100	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
	SMD-CERAMIC-CAPACITOR				
C101	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
	SMD CERAMIC CAPACITOR				
C102	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
	SMD CERAMIC CAPACITOR				
C103	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
..105	SMD-CERAMIC-CAPACITOR				
C106	CB 220PF 25V 0,2A 1205	1085.2245.00	MURATA	NFM40R11C221	
..109	EMI SUPPRESSION FILTER				

1GPK	877 3PLU	ÄI	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	2+	

6600 0700

Für diese Unterlage behalten wir uns alle Rechte vor.


C110	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT
C111	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C112	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C113	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C114	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C115	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..117	CB 220PF 25V 0,2A 1205	1085.2245.00	MURATA	NFM40R11C221
..121	EMI SUPPRESSION FILTER			
C122	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C123	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C124	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..128	CB 220PF 25V 0,2A 1205	1085.2245.00	MURATA	NFM40R11C221
C129	EMI SUPPRESSION FILTER			
..132	EMI SUPPRESSION FILTER			
C133	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C134	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C135	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C136	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C137	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR
C138	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C139	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C140	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C141	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A
C142	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C143	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C144	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..153	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F
C154	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C155	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*
..163	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C164	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*
..169	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C170	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C171	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..179	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C180	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C181	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C182	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C183	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C184	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C185	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C186	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C187	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..190	XX ENTHALTEN IN INCLUDED IN			
C191				

1GPK	877 3PLU	ÄI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	3+	

95.0026-0693

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
C192	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C193	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..199	SMD CERAMIC CAPACITOR			
C200	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*
C201	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C202	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C203	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C204	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..217	SMD CERAMIC CAPACITOR			
C218	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT
C219	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C220	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C221	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C222	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C223	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C224	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..226	SMD CERAMIC CAPACITOR			
C227	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C228	CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..230	SMD CERAMIC CAPACITOR			
C231	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C232	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C233	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT
C234	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C235	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C236	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C237	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C238	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C239	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT
C240	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT
C241	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR
C242	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C243	CC 3,9PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT
C244	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT
C245	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
..248	SMD-CERAMIC-CAPACITOR			
C249	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C250	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C251	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR
C252	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C253	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C254	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C255	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C256	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	4+

5.0028-0693

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
C257	RG 100R +-1% TK100 0603 SMD RESISTOR E1A0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H
C258	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C259	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C260	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C261	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C262	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C263	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*
C264	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C265	CC 33PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3639.00	MURATA	GRM39COG***B50ZPT
C266	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C267	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C268	CC 15PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8227.00	MURATA	GRM39COG***F50ZPT
C269	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C270	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C271	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C272	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1R0 BAW TR
C273	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C274	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C275	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C277	..277			
C278	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C279	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C280	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C281	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C282	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C283	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT
C284	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C285	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT
C286	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C287	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT
C288	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C289	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C290	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C291	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C292	CC 15PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8227.00	MURATA	GRM39COG***F50ZPT
C295	..295			
C296	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C297	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C298	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1R0 BAW TR
C299	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT
C300	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	5+

5.0026-0693

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	
C301	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT	
C302	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT	
..307	C308	CC 56PF+-1% 50VNPO 0603 SMD CERAMIK CAPACITOR	CC 1093.6417.00	MURATA	GRM39COG***F50ZPT
C309	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C310	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C311	CC 3,3PF 0,1PF 50V NPO 06	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
..314	C315	CC 3,9PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT
C316	CC 3,9PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT	
C317	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C318	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C319	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C320	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C321	CC 27PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0010.9323.00	MURATA	GRM39COG***F50ZPT	
..325	C326	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT
C327	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C328	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C329	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
..331	C332	CC 0,9PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7172.00	AVX	0603 5J *** AAW TR
C333	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
C334	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
C335	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C336	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C337	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C338	XX ENTHALTEN IN INCLUDED IN				
C339	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C340	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C341	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C342	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C343	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C344	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C345	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C346	CC 5,6PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C347	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
..349	C350	CC 56PF+-1% 50VNPO 0603 SMD CERAMIK CAPACITOR	CC 1093.6417.00	MURATA	GRM39COG***F50ZPT
C351	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C352	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
..354	C355	CC 0,9PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7172.00	AVX	0603 5J *** AAW TR
C356	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C357	XX ENTHALTEN IN INCLUDED IN				

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	6+

5.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
C358	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C359	CC 5,6PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT
C360	XX ENTHALTEN IN INCLUDED IN			
C361	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
..363				
C364	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT
C365	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C366	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR
C367	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C368	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*
C369	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1R0 BAW TR
C370	XX ENTHALTEN IN INCLUDED IN			
..374				
C375	CC 0,9PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7172.00	AVX	0603 5J *** AAW TR
C376	CC 15PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8227.00	MURATA	GRM39COG***F50ZPT
C377	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C378	XX ENTHALTEN IN INCLUDED IN			
C379	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C380	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C381	XX ENTHALTEN IN INCLUDED IN			
C382	XX ENTHALTEN IN INCLUDED IN			
C383	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT
C384	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C385	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C386	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C387	XX ENTHALTEN IN INCLUDED IN			
..393				
C394	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C395	XX ENTHALTEN IN INCLUDED IN			
..397				
C398	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR
C399	XX ENTHALTEN IN INCLUDED IN			
..401				
C402	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C403	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C404	XX ENTHALTEN IN INCLUDED IN			
C405	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C406	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C407	XX ENTHALTEN IN INCLUDED IN			
C408	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C409	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR
C410	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C411	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C412	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	7+

95.0026-0693

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C413	XX ENTHALTEN IN INCLUDED IN				
C414	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR	
C415	XX ENTHALTEN IN INCLUDED IN				
..418	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C419	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C420	XX ENTHALTEN IN INCLUDED IN				
C421	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
..427	XX ENTHALTEN IN INCLUDED IN				
C428	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C429	XX ENTHALTEN IN INCLUDED IN				
..432	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C433	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C434	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C435	XX ENTHALTEN IN INCLUDED IN				
C436	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C437	XX ENTHALTEN IN INCLUDED IN				
C438	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
..441	XX ENTHALTEN IN INCLUDED IN				
C442	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C443	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C444	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR	
C445	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR	
C446	XX ENTHALTEN IN INCLUDED IN				
C447	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C448	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C449	XX ENTHALTEN IN INCLUDED IN				
C450	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C451	XX ENTHALTEN IN INCLUDED IN				
C452	XX ENTHALTEN IN INCLUDED IN				
C453	XX ENTHALTEN IN INCLUDED IN				
C454	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C455	XX ENTHALTEN IN INCLUDED IN				
..459	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C460	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C461	XX ENTHALTEN IN INCLUDED IN				
C462	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
..464	XX ENTHALTEN IN INCLUDED IN				
C465	XX ENTHALTEN IN INCLUDED IN				
C466	XX ENTHALTEN IN INCLUDED IN				
C467	XX ENTHALTEN IN INCLUDED IN				
C468	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C469	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C470	XX ENTHALTEN IN INCLUDED IN				
C471	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C472	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	

1GPK	877 3PLU	Äi	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	8+	

5.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation
C473	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C474	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR
C475	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR
C476	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT
C477	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C478	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR
C479	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C480	XX ENTHALTEN IN INCLUDED IN			
C481	XX ENTHALTEN IN INCLUDED IN			
C482	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C483	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C484	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C485	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C487	XX ENTHALTEN IN INCLUDED IN			
C488	XX ENTHALTEN IN INCLUDED IN			
C489	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C490	XX ENTHALTEN IN INCLUDED IN			
C493	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C494	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C495	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C497	XX ENTHALTEN IN INCLUDED IN			
C498	XX ENTHALTEN IN INCLUDED IN			
C500	XX ENTHALTEN IN INCLUDED IN			
C501	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C502	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C503	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C504	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C505	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C506	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C507	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C508	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT
C509	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C510	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C511	CC 0,9PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7172.00	AVX	0603 5J *** AAW TR
C512	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C513	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C514	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT
C515	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT
C516	XX ENTHALTEN IN INCLUDED IN			
C517	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C518	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT
C521	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C523	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT
C526				


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	9+

95.0026-0693

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
C527	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C528	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C529	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C530	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C533	XX ENTHALTEN IN INCLUDED IN			
C534	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C535	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT
C540	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT
C541	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT
C542	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT
C543	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT
C544	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C545	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C546	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT
C547	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C548	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C549	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C550	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C551	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C552	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C553	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C554	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A
C555	XX ENTHALTEN IN INCLUDED IN			
C556	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C557	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C558	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C559	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C560	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C561	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C562	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C563	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C564	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C565	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C566	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C567	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C568	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C569	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C570	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C571	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	10+

05.0028-0593

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
C572	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C573	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C574	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITDR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C575	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT
.577 C578	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C579	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C580	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C581	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR
C582	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1RO BAW TR
C583	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR
C584	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C585	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR
C586	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A
C587	CC 8,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITDR	CC 0009.4550.00	MURATA	GRM39COG***B50ZPT
C588	CC 8,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4550.00	MURATA	GRM39COG***B50ZPT
C589	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT
C590	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C591	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A
C592	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C593	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C594	CC 15PF+-1% 50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2202.00	AVX	06035J150FA000J
C595	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C596	CC 15PF+-1% 50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2202.00	AVX	06035J150FA000J
C597	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C598	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C599	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C600	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*
C601	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT
C602	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT
C603	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C604	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C605	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C606	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*
.608 C609	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C610	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C611	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
.614 C615	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT
C616	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT
C617	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR

1GPK	877 3PLU	Äl	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	11+

95.0026-0693

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation
C618	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*
C619	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT
C620	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C621	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C622	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT
C623	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT
C624	CC 0,9PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7172.00	AVX	0603 5J *** AAW TR
C625	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C626	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C627	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S
C628	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S
C629	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C630	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C631	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT
C632	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT
C633	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C634	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C635	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C636	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C637	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*
C638	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*
C639	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C640	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C641	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*
C642	CC 1PF+-0,1PF50V CG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1R0 BAW TR
C643	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221
C644	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*
C645	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*
C646	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT
C647	CC 82PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 1097.6363.00	MURATA	GRM39COG***F50ZPT
C648	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*
C649	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
C650	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT
C651	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*
C652	CC 330PF+-5% 50V HDK 0603 SMD CERAMIC CAPACITOR	CC 1097.6205.00	MURATA	GRM39X7R331J50PT
C653	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*
C654	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C655	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT
C656	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*


1GPK	B77 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	12+

5.0028-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C657	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C658	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C659	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C660	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C661	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
.663 C664	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C665	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C666	XX ENTHALTEN IN INCLUDED IN				
C667	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C668	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C669	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C670	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C671	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C672	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C673	XX ENTHALTEN IN INCLUDED IN				
C674	CE 22UF+-20%35V RUND SMD SMD ELECTROLYTIC CAPACIT.	CE 0009.6253.00	PANASONIC	EEV HB 1V 220P	
C675	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
.677 C678	XX ENTHALTEN IN INCLUDED IN				
C679	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C680	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C681	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
.684 C685	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C686	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C687	XX ENTHALTEN IN INCLUDED IN				
C688	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C689	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C690	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C691	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C692	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C693	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C694	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT	
C695	XX ENTHALTEN IN INCLUDED IN				
C696	CC 270PF+-10% 50VHDK 0603 SMD CERAMIC CAPACITOR	CC 1097.6370.00	VITRAMON	VJ0603Y***KXAT	
C697	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C698	XX ENTHALTEN IN INCLUDED IN				
C699	XX ENTHALTEN IN INCLUDED IN				
C700	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C701	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT	
C702	XX ENTHALTEN IN INCLUDED IN				

95.0026-0693

1GPK	877 3PLU	Ät	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	13+

wir uns alle Rechte vor.

Kennz. Comp. No.	Bestimmung Designation	Stock No.	Manufacturer	Designation	contained in
C703	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C704	XX ENTHALTEN IN INCLUDED IN				
C705	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C706	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C707	XX ENTHALTEN IN INCLUDED IN				
C710	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C711	XX ENTHALTEN IN INCLUDED IN				
C712	CC 3,9PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C713	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C714	XX ENTHALTEN IN INCLUDED IN				
C715	XX ENTHALTEN IN INCLUDED IN				
C716	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C717	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C718	CC 82PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 1097.6363.00	MURATA	GRM39COG***F50ZPT	
C719	CC 8,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4550.00	MURATA	GRM39COG***B50ZPT	
C720	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C721	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C722	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
C723	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C724	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C725	XX ENTHALTEN IN INCLUDED IN				
C726	XX ENTHALTEN IN INCLUDED IN				
C727	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C728	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C729	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C730	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C731	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C732	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C733	CB 220PF 25V 0,2A 1205 EMI SUPPRESSION FILTER	1085.2245.00	MURATA	NFM40R11C221	
C734	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C735	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C736	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C737	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C738	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C739	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C740	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C741	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C742	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C743	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	


1GPK	877 3PLU	AI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	14+

3.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
C744	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C745	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
.747	SMD-CERAMIC-CAPACITOR			
C748	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C749	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
.752	SMD-CERAMIC-CAPACITOR			
C753	XX ENTHALTEN IN INCLUDED IN			
C754	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
	SMD-CERAMIC-CAPACITOR			
C755	XX ENTHALTEN IN INCLUDED IN			
C756	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
	SMD-CERAMIC-CAPACITOR			
C757	XX ENTHALTEN IN INCLUDED IN			
C758	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
	SMD-CERAMIC-CAPACITOR			
C759	CC 2,7PFO,1PF50V NPO 0603	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
	SMD-CERAMIC-CAPACITOR			
C760	XX ENTHALTEN IN INCLUDED IN			
C761	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR
C762	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C763	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C764	CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*
.768	SMD-CERAMIC-CAPACITOR			
C769	CC 1,0PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C770	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C771	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C772	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C773	CC 1,0PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C774	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C775	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C776	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C777	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
.782	SMD-CERAMIC-CAPACITOR			
C783	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C784	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C785	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C786	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C787	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C788	CC 0,9PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7172.00	AVX	0603 5J *** AAW TR
C789	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
.792	SMD-CERAMIC-CAPACITOR			
C793	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C794	XX ENTHALTEN IN INCLUDED IN			
C795	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C796	CC 1,8PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT
C797	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C798	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C799	XX ENTHALTEN IN INCLUDED IN			

35.0026-0693

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	15+

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation
C800	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C801	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C802	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C803	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C804	XX ENTHALTEN IN INCLUDED IN			
C805	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C806	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C807	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR
C808	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C809	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR
C810	XX ENTHALTEN IN INCLUDED IN			
C814	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C815	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C816	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*
C817	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*
C818	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C819	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C820	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR
C821	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT
C822	CC 0,9PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7172.00	AVX	0603 5J *** AAW TR
C823	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C824	XX ENTHALTEN IN INCLUDED IN			
C825	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C826	CC 56PF+-1% 50VNPO 0603 SMD CERAMIK CAPACITOR	CC 1093.6417.00	MURATA	GRM39COG***F50ZPT
C827	XX ENTHALTEN IN INCLUDED IN			
C831	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C832	XX ENTHALTEN IN INCLUDED IN			
C838	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S
C839	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C842	XX ENTHALTEN IN INCLUDED IN			
C843	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT
C844	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT
C845	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT
C848	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C849	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT
C850	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT
C851	XX ENTHALTEN IN INCLUDED IN			
C852	XX ENTHALTEN IN INCLUDED IN			
C853	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT


1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	16+

5.0026-0693

Für diese Unterlage behalten
Wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
C854	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT
C855	XX ENTHALTEN IN			
..878	INCLUDED IN			
C879	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT
C880	XX ENTHALTEN IN			
	INCLUDED IN			
C884	XX ENTHALTEN IN			
..886	INCLUDED IN			
C888	XX ENTHALTEN IN			
	INCLUDED IN			
C889	XX ENTHALTEN IN			
	INCLUDED IN			
C891	XX ENTHALTEN IN			
..895	INCLUDED IN			
C897	XX ENTHALTEN IN			
..907	INCLUDED IN			
C908	CC 3,3NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0048.5390.00	MURATA	GRM39X7R332K5C50OPT
C909	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT
..912				
C913	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT
C914	CC 56PF+-1% 50VNPO 0603 SMD CERAMIK CAPACITOR	CC 1093.6417.00	MURATA	GRM39COG***F50ZPT
..916				
C917	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*
C918	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C919	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C922	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C924	XX ENTHALTEN IN			
	INCLUDED IN			
C925	XX ENTHALTEN IN			
	INCLUDED IN			
C926	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT
C927	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT
C928	XX ENTHALTEN IN			
	INCLUDED IN			
C929	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C930	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR
C931	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT
C932	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT
C934	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR
..939				
C940	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT
C944	CC 56PF+-1% 50VNPO 0603 SMD CERAMIK CAPACITOR	CC 1093.6417.00	MURATA	GRM39COG***F50ZPT
C945	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT
C946	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR
C947	CC 0,9PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7172.00	AVX	0603 5J *** AAW TR
C948	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR
C949	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C950	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1R0 BAW TR
..952				
C953	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT
C954	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
..957				
C958	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT
C959	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR

95.0026-0693

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHM & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	17+

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation
C964	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C965	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1RO BAW TR
C966	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1RO BAW TR
C967	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H
C968	CC 1PF+-0,1PF50V COG0603 SMD-CERAMIC CAPACITOR	CC 0008.2060.00	AVX	0603 5J 1RO BAW TR
C969	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR
C970 ..972	XX ENTHALTEN IN INCLUDED IN			
C973	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C974	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT
C975	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR
C976	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR
C977 ..979	XX ENTHALTEN IN INCLUDED IN			
C982	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C983	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT
C984	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
C985	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT
D1	BS DG419DY 1XUM ANALOGSCH ANALOG SWITCH	0746.0322.00	SILICONIX	DG419DY
D2	BJ DAC8143FS 1X12B-DAC 12B SERIAL D/A-CONVERTER	1012.9510.00	PMI	DAC8143FS
D3	BJ DAC8143FS 1X12B-DAC 12B SERIAL D/A-CONVERTER	1012.9510.00	PMI	DAC8143FS
D4	BS DG419DY 1XUM ANALOGSCH ANALOG SWITCH	0746.0322.00	SILICONIX	DG419DY
D5	BS DG419DY 1XUM ANALOGSCH ANALOG SWITCH	0746.0322.00	SILICONIX	DG419DY
D6	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG.	0804.0977.00	PHILIPS_SE (PC)	74HC4094(D/T)
D7	BL PC74HC86T 4X2IN EXOR QUAD 2INPUT EXOR GATE	BL 0007.3511.00	PHILIPS_SE (PC)	74HC86(D/T)
D8	BS DG413DY 2A2R ANALOGSCH QUAD ANALOG CMOS.SWITCH	1004.7058.00	SILICONIX	DG413DY
D9	BS DG413DY 2A2R ANALOGSCH QUAD ANALOG CMOS.SWITCH	1004.7058.00	SILICONIX	DG413DY
D10	BL PC74HCT125T 4XBUFF. 3S QUAD LINE DRIVER	BL 0007.5395.00	PHILIPS_SE (PC)	74HCT125(D/T)
D11	BL PC74HCT125T 4XBUFF. 3S QUAD LINE DRIVER	BL 0007.5395.00	PHILIPS_SE (PC)	74HCT125(D/T)
D12	BL PC74HCT132T 4X2IN SCHM NAND SCHMITT TRIGGER	BL 0007.6340.00	PHILIPS (PC)	74HCT132(D/T)
D13	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG.	0804.0977.00	PHILIPS_SE (PC)	74HC4094(D/T)
D14	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG.	0804.0977.00	PHILIPS_SE (PC)	74HC4094(D/T)
D15	BL 74ACT86SC 4X 2IN-EXOR QUAD 2-INPUT EXOR GATE	BL 2005.4307.00	HARRIS (CD74)	ACT86(M)
D16	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG.	0804.0977.00	PHILIPS_SE (PC)	74HC4094(D/T)
D17	BS DG419DY 1XUM ANALOGSCH ANALOG SWITCH	0746.0322.00	SILICONIX	DG419DY
D19	BJ LTC1446L 2X12-DAC 12B SERIAL D/A-CONVERTER	1085.2200.00	LINEAR_TEC (LTC)	1446LI(S8)
D20	BL PC74HCT00T 4X2IN.NAND NAND GATE	BL 0007.6156.00	PHILIPS_SE (PC)	74HCT00D(T)
D21	BJ LTC1446L 2X12-DAC 12B SERIAL D/A-CONVERTER	1085.2200.00	LINEAR_TEC (LTC)	1446LI(S8)
D22 ..24	BS DG411DY 4X ANALOGSCH ANALOG SWITCH	0920.1723.00	SILICONIX	DG411DY
D25	BL PC74HC4051T 8CH.AN.MUX 8CHANNEL ANAL.MULTIPLEXER	0007.3592.00	PHILIPS_SE (PC)	74HC4051(D/T)


1GPK	877 3PLU	Äi	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	18+

15.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Description
D27	BL PC74HC4051T 8CH. AN. MUX 8CHANNEL ANAL. MULTIPLEXER	0007.3592.00	PHILIPS_SE	(PC)74HC4051(D/T)
D28	BL PC74HC08T 4X2IN. ANDG QUAD 2INPUT AND GATE	0007.3486.00	PHILIPS_SE	(PC)74HC08(D/T)
D29	BC X24164S8 2KX8 EEPROM IC MEMORY	2013.8937.00	ATMEL	AT24C164-10SC-2.7
D30	BG TH3032.1C SERBUSD ASIC IC GATE ARRAY	0008.6143.00	THESYS	TH3032.1C
D31	BS DG411DY 4X ANALOGSCH ANALOG SWITCH	0920.1723.00	SILICONIX	DG411DY
L1	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S
L2	XX ENTHALTEN IN INCLUDED IN			
L3	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S
L4	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S
L5	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L6	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S
L7	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)
L8	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L9	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L10	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)
L11	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L13	XX ENTHALTEN IN INCLUDED IN			
L14	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S
L15	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S
L16	LD 1,5NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6599.00	TOKO	LL1608-FH1N5S
L17	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S
L18	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)
L19	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S
L20	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S
L22	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)
L23	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L24	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)
L25	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)
L26	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L27	LD 56NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)
L28	LD 82NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6853.00	TOKO	LL2012-FH47NK(J)
L29	LD 82NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6853.00	TOKO	LL2012-FH47NK(J)
L30	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S
L31	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S
L32	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L33	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)
L34	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L35	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L36	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L37	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)

95.0026-0693

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sechnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	19+

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
L38	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L39	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L40	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L41	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L42	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S
L43	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S
L44	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L45	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S
L46	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L47	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S
L48	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L49	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L50	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)
L51	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L52	LD SP-DROSSEL 47UH 1,5A CHOKE	1081.0331.00	SUMIDA	CDR125-470
L55	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L56	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L57	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)
L58	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)
L59	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)
L60	LD 56NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)
L61	LD 56NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)
L62	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)
L63	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)
L64	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
L65	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L68	XX ENTHALTEN IN INCLUDED IN			
L69	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L70	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L71	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L72	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L73	XX ENTHALTEN IN INCLUDED IN			
L74	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L80	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)
L81	XX ENTHALTEN IN INCLUDED IN			
L82	LD 82NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6853.00	TOKO	LL2012-FH47NK(J)
L83	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L89	XX ENTHALTEN IN INCLUDED IN			
L90	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	20+

95.0025-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
L95	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100	
L96	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L97	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L98	LD 56NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)	
L99	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)	
L100	XX ENTHALTEN IN INCLUDED IN				
L101	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100	
L102	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100	
L103	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S	
L104 ..108	XX ENTHALTEN IN INCLUDED IN				
L109	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L110	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L111	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L112 ..116	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100	
L117	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)	
L118 ..124	XX ENTHALTEN IN INCLUDED IN				
L125 ..127	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S	
L128	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L129	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L130	XX ENTHALTEN IN INCLUDED IN				
L131	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L132 ..161	XX ENTHALTEN IN INCLUDED IN				
L162	LD 1D1,8NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6601.00	TOKO	LL1608-FH1N8S	
L163	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)	
L164 ..198	XX ENTHALTEN IN INCLUDED IN				
L199	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S	
L200	XX ENTHALTEN IN INCLUDED IN				
L201	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)	
L202	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)	
L203 ..226	XX ENTHALTEN IN INCLUDED IN				
L227	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)	
L228 ..232	XX ENTHALTEN IN INCLUDED IN				
L233	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)	
L234 ..259	XX ENTHALTEN IN INCLUDED IN				
L260	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L261 ..264	XX ENTHALTEN IN INCLUDED IN				
L265	LD 12NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6701.00	TOKO	LL1608-FH...K(J)	
L266 ..279	XX ENTHALTEN IN INCLUDED IN				
L280	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	

Für diese Unterlage behalten wir uns alle Rechte vor.


1GPK	877 3PLU	Är	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
 ROHDE & SCHWARZ		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	21+

95.0026-0693

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
L281	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)	
L282	LD 4,7NH+-10% 0,3A 0603	LD 0009.6653.00	TOKO	LL1608-FH...K(J)	
..284	SMD-MULTILAYER INDUCTOR				
L285	XX ENTHALTEN IN INCLUDED IN				
L286	XX ENTHALTEN IN INCLUDED IN				
L287	LD 1D1,8NH+-0,3NH0,3A0603	LD 0009.6601.00	TOKO	LL1608-FH1N8S	
..292	SMD-MULTILAYER INDUCTOR				
L293	LD 3,3NH+-10% 0,3A 0603	LD 0009.6630.00	TOKO	LL1608-FH...K(J)	
L294	SMD-MULTILAYER INDUCTOR				
..297	XX ENTHALTEN IN INCLUDED IN				
L298	LD 1D1,8NH+-0,3NH0,3A0603	LD 0009.6601.00	TOKO	LL1608-FH1N8S	
L299	SMD-MULTILAYER INDUCTOR RG 0-OHM WIDERSTAND 0603 SMD RESISTOR ETAO603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
L300	LD 2,7NH+-0,3NH 0,3A 0603	LD 0009.6624.00	TOKO	LL1608-FH2N7S	
L301	SMD-MULTILAYER INDUCTOR LD 10NH 10% 0,3A 0603	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L302	SMD-MULTILAYER INDUCTOR LD 3,9NH+-10% 0,3A 0603	LD 0009.6647.00	TOKO	LL1608-FH...K(J)	
L303	SMD-MULTILAYER INDUCTOR LD 2,7NH+-0,3NH 0,3A 0603	LD 0009.6624.00	TOKO	LL1608-FH2N7S	
L304	SMD-MULTILAYER INDUCTOR LD 2,7NH+-0,3NH 0,3A 0603	LD 0009.6624.00	TOKO	LL1608-FH2N7S	
L305	SMD-MULTILAYER INDUCTOR LD 39NH +-10% 0,3A 0603	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L306	SMD-MULTILAYER INDUCTOR LD 39NH +-10% 0,3A 0603	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L307	SMD-MULTILAYER INDUCTOR LD 3,3NH+-10% 0,3A 0603	LD 0009.6630.00	TOKO	LL1608-FH...K(J)	
L308	SMD-MULTILAYER INDUCTOR LD 3,3NH+-10% 0,3A 0603	LD 0009.6630.00	TOKO	LL1608-FH...K(J)	
L309	SMD-MULTILAYER INDUCTOR LD 10NH 10% 0,3A 0603	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L310	SMD-MULTILAYER INDUCTOR LD 56NH +-10% 0,3A 0805	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)	
L311	SMD-MULTILAYER INDUCTOR LD 56NH +-10% 0,3A 0805	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)	
L315	SMD-MULTILAYER INDUCTOR XX ENTHALTEN IN INCLUDED IN				
..320	XX ENTHALTEN IN INCLUDED IN				
L323	XX ENTHALTEN IN INCLUDED IN				
L324	XX ENTHALTEN IN INCLUDED IN				
L325	LD 12NH+-10% 0,3A 0603	LD 0009.6701.00	TOKO	LL1608-FH...K(J)	
L326	SMD-MULTILAYER INDUCTOR LD 2,7NH+-0,3NH 0,3A 0603	LD 0009.6624.00	TOKO	LL1608-FH2N7S	
L327	SMD-MULTILAYER INDUCTOR LD 10NH 10% 0,3A 0603	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L328	SMD-MULTILAYER INDUCTOR LD 3,3NH+-10% 0,3A 0603	LD 0009.6630.00	TOKO	LL1608-FH...K(J)	
L330	SMD-MULTILAYER INDUCTOR LD 3,3NH+-10% 0,3A 0603	LD 0009.6630.00	TOKO	LL1608-FH...K(J)	
L331	SMD-MULTILAYER INDUCTOR LD 3,3NH+-10% 0,3A 0603	LD 0009.6630.00	TOKO	LL1608-FH...K(J)	
L332	SMD-MULTILAYER INDUCTOR LD 56NH +-10% 0,3A 0805	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)	
L333	SMD-MULTILAYER INDUCTOR LD 82NH +-10% 0,3A 0805	LD 0009.6853.00	TOKO	LL2012-FH47NK(J)	
L334	SMD-MULTILAYER INDUCTOR LD 10NH 10% 0,3A 0603	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L335	SMD-MULTILAYER INDUCTOR LD 12NH+-10% 0,3A 0603	LD 0009.6701.00	TOKO	LL1608-FH...K(J)	
L336	SMD-MULTILAYER INDUCTOR LD 8,2NH+-10% 0,3A 0603	LD 0009.6682.00	TOKO	LL1608-FH...K(J)	
L337	SMD-MULTILAYER INDUCTOR LD 6,8NH+-10% 0,3A 0603	LD 0009.6676.00	TOKO	LL1608-FH...K(J)	
L338	SMD-MULTILAYER INDUCTOR LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L339	RF CHOKE LD 10NH 10% 0,3A 0603	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L340	SMD-MULTILAYER INDUCTOR LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
..343	RF CHOKE				

5.0026-0693

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	22+

Für diese Unterlage behalten
wir uns alle Rechte vor.


L344	LD 18NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6724.00	TOKO	LL1608-FH...K(J)
L345	LD 18NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6724.00	TOKO	LL1608-FH...K(J)
L346	LD 220NH 10% 0,28A 1210 RF CHOKE	LD 0520.7911.00	SIEMENS	B82422-A3221-J(K)100
L347	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
L348	XX ENTHALTEN IN INCLUDED IN			
L349	XX ENTHALTEN IN INCLUDED IN			
L350	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)
L351	XX ENTHALTEN IN INCLUDED IN			
L352	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)
L353	XX ENTHALTEN IN INCLUDED IN			
L354	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100
L355	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100
L356	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
..358				
L360	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L361	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)
L362	XX ENTHALTEN IN INCLUDED IN			
..369				
L371	XX ENTHALTEN IN INCLUDED IN			
..376				
L377	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L378	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L379	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
L380	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
..382				
L383	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
..385				
L386	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L387	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
L388	XX ENTHALTEN IN INCLUDED IN			
..394				
L397	XX ENTHALTEN IN INCLUDED IN			
..401				
L402	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
..404				
L405	XX ENTHALTEN IN INCLUDED IN			
..411				
L412	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L413	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
L414	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
..416				
L417	XX ENTHALTEN IN INCLUDED IN			
L418	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L419	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
L420	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
L421	XX ENTHALTEN IN INCLUDED IN			
L422	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100
..426				
L427	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L428	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)

1GPK	877 3PLU	ÄI	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	23+

95.0028-0693

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	continued in
L429 .434 L435	LD 1UH 10% 0,38A 1210 RF CHOKE XX ENTHALTEN IN INCLUDED IN	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L436	XX ENTHALTEN IN INCLUDED IN				
L437 .439 L440	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100	
L441	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR XX ENTHALTEN IN INCLUDED IN	LD 0009.6647.00	TOKO	LL1608-FH...K(J)	
L442 .446 L447	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)	
L448	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L449	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)	
L450	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)	
L451 .456 L457	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L458	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)	
L459	LD 56NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6830.00	TOKO	LL1608-FH...K(J)	
L460	LD 56NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)	
L461	LD 82NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6853.00	TOKO	LL2012-FH47NK(J)	
L462	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR XX ENTHALTEN IN INCLUDED IN	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L463	XX ENTHALTEN IN INCLUDED IN				
L464	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L465	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L466	XX ENTHALTEN IN INCLUDED IN				
L467 .486 L487	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L488	XX ENTHALTEN IN INCLUDED IN				
L489	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L490 .492 L494	XX ENTHALTEN IN INCLUDED IN				
L505 .503 L509	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L510 .515 L516	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L517 .551 L552	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L555 .573 L574	XX ENTHALTEN IN INCLUDED IN				
L575	LD 1D1,8NH+-0,3NHO,3A0603 SMD-MULTILAYER INDUCTOR	LD 0009.6601.00	TOKO	LL1608-FH1N8S	
L576 .578 L579	XX ENTHALTEN IN INCLUDED IN				
L575	LD 1D1,8NH+-0,3NHO,3A0603 SMD-MULTILAYER INDUCTOR	LD 0009.6601.00	TOKO	LL1608-FH1N8S	
L576	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S	
L577	XX ENTHALTEN IN INCLUDED IN				
L578	LD 2,7NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6624.00	TOKO	LL1608-FH2N7S	


1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	24+

5.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Description	Stock No.	Manufacturer	Designation
L580	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L581	XX ENTHALTEN IN INCLUDED IN			
L582	XX ENTHALTEN IN INCLUDED IN			
L583	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
.603 L604	XX ENTHALTEN IN INCLUDED IN			
L605	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L607	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L608	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)
L609	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
.616 L618	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
.620 L621	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L622	XX ENTHALTEN IN INCLUDED IN			
L624	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L625	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L626	XX ENTHALTEN IN INCLUDED IN			
.628 L629	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)
L630	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)
L631	LD 56NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6830.00	TOKO	LL2012-FH56NK(J)
L632	LD 5,6NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6660.00	TOKO	LL1608-FH...K(J)
L633	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100
L634	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)
L635	XX ENTHALTEN IN INCLUDED IN			
.640 L642	XX ENTHALTEN IN INCLUDED IN			
.648 L650	XX ENTHALTEN IN INCLUDED IN			
N1	BO OP275GS LN 2XFET OPAMP LOW NOISE FET AUDIO OPAMP	2043.0928.00	ANALOG_DEV	OP275GS
N2	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)
N3	BM SCA-4 DC-3G MMIC MMIC AMPLIFIER	1085.2251.00	STANFORD	SCA-4
N4	BM SCA-4 DC-3G MMIC MMIC AMPLIFIER	1085.2251.00	STANFORD	SCA-4
N5	BO REFO1CS 10V 20MA VREF VOLTAGE REFERENCE	1002.5129.00	PMI	REFO1C(S)
N6	BM SFD1001 VERDOPPLER FREQUENCY DOUBLER IC	1039.1804.00	WATKINS-JO	SFD1001
N7	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)
N8	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)
N9	BM MGA82563 0.1-6G MMIC MICROWAVE MONOLITHIC AMPL	1085.2100.00	HEWLETT_PA	MGA-82563-TR1
N10	BO AD823AR 2XFET OPAMP JFET INPUT HIGH-SPEED AMP	BO 1090.4288.00	ANALOG_DEV	AD823AR
N11	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)
N12	BO AD823AR 2XFET OPAMP JFET INPUT HIGH-SPEED AMP	BO 1090.4288.00	ANALOG_DEV	AD823AR
N13	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)
N14	BM MGA82563 0.1-6G MMIC MICROWAVE MONOLITHIC AMPL	1085.2100.00	HEWLETT_PA	MGA-82563-TR1

95.0026-0893

1GPK	877 3PLU	Ät	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	25+


wir uns alle Rechte vor.

Rechnung Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
N15	BM SNA486 0,1-8G MMIC MICROWAVE MONOLITHIC AMPL	1085.1961.00	STANFORD_M	SNA-486	
N17	BM SNA486 0,1-8G MMIC MICROWAVE MONOLITHIC AMPL	1085.1961.00	STANFORD_M	SNA-486	
N18	BM MGA82563 0.1-6G MMIC MICROWAVE MONOLITHIC AMPL	1085.2100.00	HEWLETT_PA	MGA-82563-TR1	
.25 N26	BO AD829JR HISPEED OPAMP LOW-NOISE HIGH-SPEED AMP	BO 1036.4254.00	ANALOG_DEV	AD829JR	
N27	BO AD744KR FET OPAMP 500NS SETTLE. BIFET OPAMP	BO 0854.1754.00	ANALOG_DEV	(AD)744KR	
N28	BO AD823AR 2XFET OPAMP JFET INPUT HIGH-SPEED AMP	BO 1090.4288.00	ANALOG_DEV	AD823AR	
N29	BO AD744KR FET OPAMP 500NS SETTLE. BIFET OPAMP	BO 0854.1754.00	ANALOG_DEV	(AD)744KR	
N30	BO AD823AR 2XFET OPAMP JFET INPUT HIGH-SPEED AMP	BO 1090.4288.00	ANALOG_DEV	AD823AR	
N31	BO AD823AR 2XFET OPAMP JFET INPUT HIGH-SPEED AMP	BO 1090.4288.00	ANALOG_DEV	AD823AR	
N32	BO OP275GS LN 2XFET OPAMP LOW NOISE FET AUDIO OPAMP	2043.0928.00	ANALOG_DEV	OP275GS	
N35	BM MGA82563 0.1-6G MMIC MICROWAVE MONOLITHIC AMPL	1085.2100.00	HEWLETT_PA	MGA-82563-TR1	
N36	BM MGA82563 0.1-6G MMIC MICROWAVE MONOLITHIC AMPL	1085.2100.00	HEWLETT_PA	MGA-82563-TR1	
N37	BM MGA82563 0.1-6G MMIC MICROWAVE MONOLITHIC AMPL	1085.2100.00	HEWLETT_PA	MGA-82563-TR1	
N38	BM SNA486 0,1-8G MMIC MICROWAVE MONOLITHIC AMPL	1085.1961.00	STANFORD_M	SNA-486	
N39	BM SNA486 0,1-8G MMIC MICROWAVE MONOLITHIC AMPL	1085.1961.00	STANFORD_M	SNA-486	
N40	BO AD823AR 2XFET OPAMP JFET INPUT HIGH-SPEED AMP	BO 1090.4288.00	ANALOG_DEV	AD823AR	
P1	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P3	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P6	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P7	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P8	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P10	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P11	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P12	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P22	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P27	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P29	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
R1	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R2	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603	
R3	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603	
R4	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603	
R5	RG 3R92 +-1% TK250 0603 SMD RESISTOR EIA0603	0048.4170.00	PHILIPS_CO	RC 22 H	
R6	RG 49R9 1% 1W 1218 SMD RESISTOR	0048.5083.00	PHILIPS_CO	PRC201-49R9 1% TK100	
R7	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R8	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R9	RG 20,0OHM+-0,1%TK25 1206 CHIP RESISTOR	1110.3068.00	PHILIPS_CO	MPC 01	
R10	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R11	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	

1GPK	877 3PLU	AI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	26+

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
R12	RG 68R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6930.00	DRALORIC CR 0603
R13	RG 1R +-1% TK250 SMD RESISTOR EIA0603	0603	0048.4187.00	DRALORIC CR 0603
R14	RG 10,00HM+-0,1%TK25 CHIP RESISTOR	1206	0009.9546.00	PHILIPS_CO MPC 01
R15	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R16	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R17	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H
R18	RG 20R 1% 1W SMD RESISTOR	1218	1104.2734.00	PHILIPS_CO PRC201-20R 1% TK100
R19	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H
R20	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H
R21	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603
R22	RG 1R +-1% TK250 SMD RESISTOR EIA0603	0603	0048.4187.00	DRALORIC CR 0603
R23	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9300.00	DRALORIC CR 0603
R24	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603
R25	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603
R26	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J
R27	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J
R28	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9300.00	DRALORIC CR 0603
R29	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9300.00	DRALORIC CR 0603
R30	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J
R31	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J
R32	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R33	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R34	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603
R35	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603
R36	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603
R37	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603
R38	RG 15,00HM+-0,1%TK25 CHIP RESISTOR	1206	1080.7590.00	PHILIPS_CO MPC 01
R39	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603
R40	RG 56R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9646.00	DRALORIC CR 0603
R41	RG 15,00HM+-0,1%TK25 CHIP RESISTOR	1206	1080.7590.00	PHILIPS_CO MPC 01
R42	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603
R43	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H
R44	RG 10,00HM+-0,1%TK25 CHIP RESISTOR	1206	0009.9546.00	PHILIPS_CO MPC 01
R45	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603
R46	RG 392K+-1% TK100 RESISTOR	0603	1097.6528.00	DRALORIC CR 0603
R51	RG 470K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7120.00	PHILIPS_CO RC 22 H
R52	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R53	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	27+

95.0026-0893

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R54	RG 27,4 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9046.00	PHILIPS_CO RC 22 H	
R55	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R56	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R57	RG 20R 1% 1W SMD RESISTOR	1218	1104.2734.00	PHILIPS_CO PRC201-20R 1% TK100	
R58	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R59	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603	
R60	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603	
R61	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R62	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R63	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R64	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R65	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R66	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R67	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R68	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603	
R69	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603	
R70	RG 200R +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6386.00	DRALORIC CR 0603	
R71	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R72	RG 10,0OHM+-0,1%TK25 CHIP RESISTOR	1206	0009.9546.00	PHILIPS_CO MPC 01	
R73	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603	
R74	RG 39K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9823.00	PHILIPS_CO RC 22 H	
R75	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603	
R76	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R77	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R78	RG 10,0OHM+-0,1%TK25 CHIP RESISTOR	1206	0009.9546.00	PHILIPS_CO MPC 01	
R79	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R80	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R81	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R82	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R83	RG 200R +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6386.00	DRALORIC CR 0603	
R84	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R85	RG 3,01KOH+-0,1%TK25 RESISTOR	1206	0010.2058.00	PHILIPS_CO MPC 01	
R86	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R87	RG 39R 1% 1W SMD-RESISTOR	1218	1104.2786.00	PHILIPS_CO PRC201-39R 1% TK100	
R88	RG 3,01KOH+-0,1%TK25 RESISTOR	1206	0010.2058.00	PHILIPS_CO MPC 01	
R89	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R90	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R91	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R92	RG 0-OHM WIDERSTAND RESISTOR CHIP 0-OHM	1206	RG 0007.5108.00	DRALORIC CR 1206	


1GPK	877 3PLU	Äi	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	28+

15.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer
R93	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.5334.00	PHILIPS_CO RC 22 H
R94	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC CR 0603
R95	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R96	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CO RC 22 H
R97	RG 20R 1% 1W 1218 SMD RESISTOR	1104.2734.00	PHILIPS_CO PRC201-20R 1% TK100
R98	RG 39R 1% 1W 1218 SMD-RESISTOR	1104.2786.00	PHILIPS_CO PRC201-39R 1% TK100
R99	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R100	RG 220K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7108.00	DRALORIC CR 0603
R101	RG 10M 1% TK100 0603 SMD RESISTOR	0048.5090.00	DRALORIC CR 0603
R102	RG 220K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7108.00	DRALORIC CR 0603
R104	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO RC 22 H
R105	SMD RESISTOR EIA0603		
R108	RG 56K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9117.00	DRALORIC CR 0603
R109	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R110	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R111	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	1104.2734.00	PHILIPS_CO PRC201-20R 1% TK100
R112	RG 20R 1% 1W 1218 SMD RESISTOR	1104.2734.00	PHILIPS_CO PRC201-20R 1% TK100
R113	RG 20R 1% 1W 1218 SMD RESISTOR	1104.2740.00	PHILIPS_CO PRC201-100R 1% TK100
R114	RG 100R 1% 1W 1218 SMD RESISTOR	0048.5090.00	DRALORIC CR 0603
R115	RG 10M 1% TK100 0603 SMD RESISTOR	RG 0009.5357.00	PHILIPS_CO RC 22 H
R116	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7037.00	DRALORIC CR 0603
R117	RG 6K8 +-1% TK100 0603 SMD RESISTOR EIA0603	0048.5090.00	DRALORIC CR 0603
R118	RG 10M 1% TK100 0603 SMD RESISTOR	0048.4187.00	DRALORIC CR 0603
R119	RG 1R +-1% TK250 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H
R121	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	0048.5090.00	DRALORIC CR 0603
R122	RG 10M 1% TK100 0603 SMD RESISTOR	1110.3068.00	PHILIPS_CO MPC 01
R123	RG 20,00HM+-0,1%TK25 1206 CHIP RESISTOR	0009.6960.00	DRALORIC CR 0603
R124	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H
R125	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO RC 22 H
R126	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9546.00	PHILIPS_CO MPC 01
R127	RG 10,00HM+-0,1%TK25 1206 CHIP RESISTOR	RG 0009.5334.00	PHILIPS_CO RC 22 H
R128	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9546.00	PHILIPS_CO MPC 01
R130	RG 10,00HM+-0,1%TK25 1206 CHIP RESISTOR	1093.6200.00	PHILIPS_CO RC 22 H
R131	RG 200K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC CR 0603
R132	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9123.00	DRALORIC CR 0603
R133	RG 82K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO RC 22 H
R134	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	1097.6340.00	PHILIPS_CO RC 22 H
R135	RG 121K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9123.00	DRALORIC CR 0603
R136	RG 82K5 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC CR 0603
R139	RG 1M0 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO RC 22 H
R140	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603		
R141	RG 1M0 +-1% TK100 0603 SMD RESISTOR EIA0603		
R142	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603		
R143	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603		
R146	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603		

35.0026-0693

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	29+

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R147	RG 3R32 +-1% TK250 SMD RESISTOR EIA0603	0603		0010.8362.00 DRALORIC	CR 0603
R148	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7043.00 DRALORIC	CR 0603
R149	RG 4,02KOH+-0,1%TK25 SMD-RESISTOR EIA1206	1206		0009.7814.00 PHILIPS_CO	MPC 01
R150	RG 130R +-1% TK100 SMD RESISTOR EIA0603	0603		1078.3110.00 DRALORIC	CR 0603
R151	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6960.00 DRALORIC	CR 0603
R152	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8440.00 PHILIPS_CO	RC 22 H
R155	RG 27K4 +-1% TK100 SMD RESISTOR EIA0603	0603		1097.6392.00 DRALORIC	CR 0603
R156	RG 27K4 +-1% TK100 SMD RESISTOR EIA0603	0603		1097.6392.00 DRALORIC	CR 0603
R157	RG 27K4 +-1% TK100 SMD RESISTOR EIA0603	0603		1097.6392.00 DRALORIC	CR 0603
R158	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6918.00 DRALORIC	CR 0603
R159	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6899.00 DRALORIC	CR 0603
R160	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603		0009.9100.00 DRALORIC	CR 0603
R161	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8427.00 PHILIPS_CO	RC 22 H
R162	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603		0009.9100.00 DRALORIC	CR 0603
R163	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		0009.9369.00 PHILIPS_CO	RC21 0 OHM
R164	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603		0009.9100.00 DRALORIC	CR 0603
R165	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		0009.9369.00 PHILIPS_CO	RC21 0 OHM
R166	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H
R167	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H
R168	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R169	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO	RC 22 H
R170	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO	RC 22 H
R171	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC	CR 0603
R172	RS 0,25W 5KOHM +-20% SMD POTENTIOMETER		RS 0007.9632.00	BI_TECHNOL	23 B R... TR
R173	RS 0,25W 20K MULTI SE SMD POTENTIOMETER		1100.4626.00	BI_TECHNOL	44JR20K
R174	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R176	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO	RC 22 H
R177	RG 30K1+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9281.00	PHILIPS_CO	RC 22 H
R178	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R181	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO	RC 22 H
R182	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R183	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO	RC 22 H
R184	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R185	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC	CR 0603
R186	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC	CR 0603
R187	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	DRALORIC	CR 0603
R188	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R189	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	DRALORIC	CR 0603
R190	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC	CR 0603
R191	RG 470K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7120.00	PHILIPS_CO	RC 22 H
R192	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	DRALORIC	CR 0603
R193	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC	CR 0603

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	30+	

15.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
R194	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H
R195	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603
R196	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603
R197	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R198	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603
R199	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R200	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603
R201	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R202	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603
R203	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	DRALORIC CR 0603
R204	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603
R206	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R207	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R208	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R209	RG 5K11 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6334.00	PHILIPS_CO RC 22 H
R210	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R212	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H
R213	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R214	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9117.00	DRALORIC CR 0603
R215	RG 56K2 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603
R216	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9546.00	PHILIPS_CO MPC 01
R217	RG 10,00HM+-0,1%TK25 CHIP RESISTOR	1206	RG 0009.5363.00	DRALORIC CR 0603
R218	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9117.00	DRALORIC CR 0603
R219	RG 56K2 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R220	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R221	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	1104.2786.00	PHILIPS_CO PRC201-39R 1% TK100
R222	RG 39R 1% 1W SMD-RESISTOR	1218	RG 0009.5357.00	PHILIPS_CO RC 22 H
R223	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R224	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO RC 22 H
R225	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R226	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	3528.0973.00	VITROHM RGC509-0 13R 5%
R227	RG 13R 5% 1W SMD RESISTOR	2512	RG 0009.5357.00	PHILIPS_CO RC 22 H
R228	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6982.00	PHILIPS_CO RC 22 H
R231	RG 680R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R232	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R233	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R236	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9098.00	DRALORIC CR 0603
R237	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R238	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R239	RG 432R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9098.00	DRALORIC CR 0603
R240	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R245	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603
R246	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R247	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603		

1GPK	877 3PLU	Ät	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	31+

95.0026-0693

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R248	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R249	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603	
R250	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603	
R251	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R252	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603	
R253	RG 56K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9117.00	DRALORIC CR 0603	
R254	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R255	RG 16,2K +-1% TK100 SMD RESISTOR EIA0603	0603	1093.6130.00	DRALORIC CR 0603	
R256	RG 56R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9646.00	DRALORIC CR 0603	
R257	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R258	RG 56R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9646.00	DRALORIC CR 0603	
R259	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
. . 265 R266	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R267	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R268	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R269	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R270	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R271	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R272	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R273	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R274	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R275	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R276	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R277	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R278	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R279	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R280	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
. . 285 R286	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R287	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R288	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R289	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
. . 294 R295	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R296	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
. . 298 R299	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603	
. . 301 R302	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
. . 307 R308	RG 56R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9646.00	DRALORIC CR 0603	
R309	RG 12K1 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8462.00	DRALORIC CR 0603	
R310	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R311	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	


1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	32+	

S.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation
R312	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R313	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R314	RG 3K01+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9298.00	DRALORIC	CR 0603
R315	RG 3K01+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9298.00	DRALORIC	CR 0603
R316	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R317	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R318	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R319	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R320	RG 24,3 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.8991.00	DRALORIC	CR 0603
R321	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R322	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R323	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R324	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R325	RG 39R 1% 1W 1218 SMD-RESISTOR	1104.2786.00	PHILIPS_CO	PRC201-39R 1% TK100
R326	RG 56K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9117.00	DRALORIC	CR 0603
R327	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM
R328	RG 56K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9117.00	DRALORIC	CR 0603
R329	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6960.00	DRALORIC	CR 0603
R330	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM
R331	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM
R332	RG 33R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6918.00	DRALORIC	CR 0603
R333	RG 619R +-1% TK100 0603 SMD RESISTOR EIA0603	1093.6169.00	PHILIPS_CO	RC 22 H
R334	RG 619R +-1% TK100 0603 SMD RESISTOR EIA0603	1093.6169.00	PHILIPS_CO	RC 22 H
R335	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603
R336	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603
R337	RG 130R +-1% TK100 0603 SMD RESISTOR EIA0603	1078.3110.00	DRALORIC	CR 0603
R338	RG 130R +-1% TK100 0603 SMD RESISTOR EIA0603	1078.3110.00	DRALORIC	CR 0603
R339	RG 560R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9630.00	DRALORIC	CR 0603
R340	RG 560R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9630.00	DRALORIC	CR 0603
R341	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H
R342	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H
R343	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H
R344	RG 51,0 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9030.00	DRALORIC	CR 0603
R345	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM
R346	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R347	RG 30K1+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9281.00	PHILIPS_CO	RC 22 H
R348	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM
R349	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM
R350	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6960.00	DRALORIC	CR 0603

95.0026-0693

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	33+

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R351	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9030.00 DRALORIC	CR 0603
R352	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6918.00 DRALORIC	CR 0603
R353	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7014.00 DRALORIC	CR 0603
R354	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6918.00 DRALORIC	CR 0603
R355	CC 2,7PFO,1PF50V NPO SMD-CERAMIC-CAPACITOR	0603	CC 0009.8291.00 MURATA		GRM39COG***B50ZPT
R356	CC 2,7PFO,1PF50V NPO SMD-CERAMIC-CAPACITOR	0603	CC 0009.8291.00 MURATA		GRM39COG***B50ZPT
R357	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6918.00 DRALORIC	CR 0603
R358	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7043.00 DRALORIC	CR 0603
R359	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7043.00 DRALORIC	CR 0603
R360	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603		0010.9275.00 PHILIPS_CO	RC 22 H
R361	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6924.00 PHILIPS_CO	RC 22 H
R362	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6918.00 DRALORIC	CR 0603
R363	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		0009.9369.00 PHILIPS_CO	RC21 0 OHM
R364	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6918.00 DRALORIC	CR 0603
R366	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R367	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R368	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9030.00 DRALORIC	CR 0603
R369	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R370	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6918.00 DRALORIC	CR 0603
R371	RK SMD-HEISSL.220R SMD-NTC-RESISTOR	0805		1039.1310.00 SIEMENS	B57620-C221-K62
R372	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6918.00 DRALORIC	CR 0603
R373	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		0009.9369.00 PHILIPS_CO	RC21 0 OHM
R374	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		0009.9369.00 PHILIPS_CO	RC21 0 OHM
R375	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R376	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603
R377	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6924.00 PHILIPS_CO	RC 22 H
R378	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603
R379	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603
R380	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6924.00 PHILIPS_CO	RC 22 H
R381	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603
R382	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603
R383	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		0009.9369.00 PHILIPS_CO	RC21 0 OHM
R384	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		0009.9369.00 PHILIPS_CO	RC21 0 OHM
R385	RG 27OR +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9581.00 PHILIPS_CO	RC 22 H
R386	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603
R387	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603
R388	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R389	RG 27OR +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9581.00 PHILIPS_CO	RC 22 H
R390	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603
R391	RG 47OR +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00 DRALORIC	CR 0603

1GPK	877 3PLU	Ät	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	34+	

95.0026-0593

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Description
R392	RG 825R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8391.00	PHILIPS_CO	RC 22 H
R393	RG 5K11 +-1% TK100 0603 SMD RESISTOR EIA0603	1097.6334.00	PHILIPS_CO	RC 22 H
R394	RS 0,25W 1KOHM +-20% SMD RG POTENTIOMETER	RS 0007.9610.00	BI_TECHNOL	23 B R... TR
R395	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603
R396	RG 4K7 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7020.00	PHILIPS_CO	RC 22 H
R397	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603
R399	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603
R400	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R402	RG 220K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7108.00	DRALORIC	CR 0603
R403	RG 220K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7108.00	DRALORIC	CR 0603
R404	RG 5K11 +-1% TK100 0603 SMD RESISTOR EIA0603	1097.6334.00	PHILIPS_CO	RC 22 H
R408	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603
R409	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R410	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603
R412	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R413	RG 3K3 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7014.00	DRALORIC	CR 0603
R414	RG 56K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9117.00	DRALORIC	CR 0603
. . 416 R419	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM
R420	RG 162 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9500.00	PHILIPS_CO	RC 22 H
. . 423 R424	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R425	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R426	RG 1K82 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8404.00	PHILIPS_CO	RC 22 H
R427	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603
R428	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603
R429	RG 162 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9500.00	PHILIPS_CO	RC 22 H
R430	RG 162 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9500.00	PHILIPS_CO	RC 22 H
R431	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R432	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R433	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603
R434	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603
R435	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603
R436	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603
R437	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603
R438	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R439	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO	RC 22 H
R440	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO	RC 22 H
R441	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO	RC 22 H
R442	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO	RC 22 H
R443	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	35+

35.0026-0693


V01 0103 4103 INSCRITE V01

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R444	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R445	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R448	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9300.00	DRALORIC CR 0603	
R449	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9300.00	DRALORIC CR 0603	
R450	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R457	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
..459	SMD RESISTOR EIA0603				
R460	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R461	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
..464	SMD RESISTOR EIA0603				
R466	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R468	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
..471	SMD RESISTOR EIA0603				
R472	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R473	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
..476	SMD RESISTOR EIA0603				
R478	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R479	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R481	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R486	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R487	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H	
R488	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H	
R489	RG 82,5 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9052.00	DRALORIC CR 0603	
R495	RG 39R 1% 1W SMD-RESISTOR	1218	1104.2786.00	PHILIPS_CO·PRC201-39R 1% TK100	
R499	RG 150 OHM+-1%TK100 RESISTOR CHIP	1206	RG 0007.5589.00	PHILIPS_CO RC02	
R514	RG 3R32 +-1% TK250 SMD RESISTOR EIA0603	0603	0010.8362.00	DRALORIC CR 0603	
R517	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R519	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	
..523	SMD RESISTOR EIA0603				
R529	RG 121 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9498.00	DRALORIC CR 0603	
R530	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
..537	SMD RESISTOR EIA0603				
R538	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	
..542	SMD RESISTOR EIA0603				
R543	RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R544	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	
..548	SMD RESISTOR EIA0603				
R549	RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
..551	SMD RESISTOR EIA0603				
R555	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
..559	SMD RESISTOR EIA0603				
R570	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R571	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R572	RG 220K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7108.00	DRALORIC CR 0603	
..575	SMD RESISTOR EIA0603				
R585	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R586	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R587	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R588	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R594	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	

1GPK	877 3PLU	ÄI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	36+	

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R604	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R605	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R608	RS 0,25W10KOHM +-20% SMD POTENTIOMETER		RS 0007.9649.00	BI_TECHNOL 23 B R... TR	
R609	RG 110 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9481.00	DRALORIC CR 0603	
R610	RG 110 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9481.00	DRALORIC CR 0603	
R615	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R616	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R617	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R619	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R621	RG 560R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9630.00	DRALORIC CR 0603	
R624	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R625	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R626	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R628	RG 5K11 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6334.00	PHILIPS_CO RC 22 H	
.631 R633	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R634	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R635	RG 12,0KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.7620.00	PHILIPS_CO MPC 01	
R636	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R637	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R638	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R639	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R644	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R648	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R649	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R655	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R659	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R660	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R661	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R662	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
.664 R672	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R675	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R676	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO RC 22 H	
R681	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R689	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
.692 R699	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R712	RG 5K11 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6334.00	PHILIPS_CO RC 22 H	
R722	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R725	RG 5K11 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6334.00	PHILIPS_CO RC 22 H	
R727	RG 5K11 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6334.00	PHILIPS_CO RC 22 H	


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	877 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	37+

95.0026-0693

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R731 ..733	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R735	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R736	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R737	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R738	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R739 ..742	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R744	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R745	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R748 ..755	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R761	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R762	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R764	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R765	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	DRALORIC CR 0603	
R766	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R767	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R768	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R769	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R775	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R776	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603	0010.9275.00	PHILIPS_CO RC 22 H	
R777	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R778	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R780	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R782	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R784	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R785	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	DRALORIC CR 0603	
R787	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603	
R788	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603	
R791	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R793	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R794	RG 39R2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9400.00	DRALORIC CR 0603	
R798	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R799 ..803	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R805	RG 6K8 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7037.00	DRALORIC CR 0603	
R808	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R809	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R812	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R817 ..820	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R821	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R822	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	


1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	38+	

5.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	Continued in
R826	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603		0010.9275.00 PHILIPS_CO RC 22 H	
R827	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6901.00 DRALORIC CR 0603	
R828	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603		0010.9275.00 PHILIPS_CO RC 22 H	
R830	RG 82K5 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9123.00 DRALORIC CR 0603	
R833	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00 PHILIPS_CO RC 22 H	
R835	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00 PHILIPS_CO RC 22 H	
R836	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00 PHILIPS_CO RC 22 H	
R841	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5340.00 PHILIPS_CO RC 22 H	
R842	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00 PHILIPS_CO RC 22 H	
R845	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7014.00 DRALORIC CR 0603	
R848	RS 0,25W50KOHM +-20% SMD POTENTIOMETER		RS	0007.9661.00 BI_TECHNOL 23 B R... TR	
R853	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603		0010.9300.00 DRALORIC CR 0603	
R854	RG 18K2+-1% TK100 SMD RESISTOR EIA0603	0603		0010.9317.00 DRALORIC CR 0603	
R855	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00 DRALORIC CR 0603	
R856	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603		1097.6328.00 DRALORIC CR 0603	
R857	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00 DRALORIC CR 0603	
R858	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00 DRALORIC CR 0603	
R861	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.8991.00 DRALORIC CR 0603	
R862	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7066.00 PHILIPS_CO RC 22 H	
R866	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00 DRALORIC CR 0603	
R867	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5363.00 DRALORIC CR 0603	
R870	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00 DRALORIC CR 0603	
R872	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00 DRALORIC CR 0603	
R873	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00 DRALORIC CR 0603	
R874	RG 13K +-1% TK100 SMD RESISTOR EIA0603	0603		1097.6428.00 PHILIPS_CO RC 22 H	
R880	RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206		0009.7666.00 PHILIPS_CO MPC 01	
R881	RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206		0009.7666.00 PHILIPS_CO MPC 01	
R883	RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206		0009.7666.00 PHILIPS_CO MPC 01	
R885	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5334.00 PHILIPS_CO RC 22 H	
R886	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9000.00 PHILIPS_CO RC 22 H	
R891	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.8991.00 DRALORIC CR 0603	
R894	RG 39R2 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9400.00 DRALORIC CR 0603	
R895	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6901.00 DRALORIC CR 0603	
R896	RG 121 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9498.00 DRALORIC CR 0603	
R897	RG 39R2 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9400.00 DRALORIC CR 0603	
R899	RG 39R2 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9400.00 DRALORIC CR 0603	
R902	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.8991.00 DRALORIC CR 0603	
R903	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.8991.00 DRALORIC CR 0603	
R914	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.8991.00 DRALORIC CR 0603	


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	39+

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation
R919 .921	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603
R924	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603
R925	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603
R928	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J
R929 .931	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J
R934	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603
R935	RG 24,3 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8991.00	DRALORIC CR 0603
R938	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J
R939	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7066.00	PHILIPS_CO RC 22 H
R940	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7066.00	PHILIPS_CO RC 22 H
R946	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H
R954	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H
R955	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H
R956	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R958	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R959	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R960 .963	RG 1R +-1% TK250 SMD RESISTOR EIA0603	0603	0048.4187.00	DRALORIC CR 0603
R964	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R967	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R968	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R1006	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603
R1007	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM
R1008	RG 12K1 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8462.00	DRALORIC CR 0603
R1310	RG 0-OHM WIDERSTAND RESISTOR CHIP 0-OHM	1206	RG 0007.5108.00	DRALORIC CR 1206
R1311 .1317	RK SMD-HEISSL.220R SMD-NTC-RESISTOR	0805	1039.1310.00	SIEMENS B57620-C221-K62
R1318	RL 0.40W 15,0KOHM+-1%TK50 RESISTOR	0805	RL 0092.1580.00	DRALORIC SMA0204
R1319	RK SMD-HEISSL.220R SMD-NTC-RESISTOR	0805	1039.1310.00	SIEMENS B57620-C221-K62
R1320	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J
R1330	RG 51K1 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6486.00	DRALORIC CR 0603
R1331	RG 150 OHM+-1%TK100 RESISTOR CHIP	1206	RG 0007.5589.00	PHILIPS_CO RC02
R1340 .1351	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603
S1	BM HMC158C8 VERDOPPLER FREQUENCY DOUBLER		1085.2151.00	HITTITE_MI HMC158C8
S2	BM SSW-124 SPDTSWITCH GAAS RF-SWITCH		1085.2222.00	STANFORD_M SSW-124
S3	BM SSW-124 SPDTSWITCH GAAS RF-SWITCH		1085.2222.00	STANFORD_M SSW-124
U5	BO LM2903D 2XLP COMPAR DUAL		0520.7734.00	SIGNETICS LM2903(D)
U6	BO LM2903D 2XLP COMPAR DUAL		0520.7734.00	SIGNETICS LM2903(D)
U7	ER JPS-2-1W 2WEG-L.TEILER 2WAY POWER DIVIDER		1085.1603.00	MINI-CIRCU JPS-2-1W
U8	ER JPS-2-1W 2WEG-L.TEILER 2WAY POWER DIVIDER		1085.1603.00	MINI-CIRCU JPS-2-1W


1GPK	877 3PLU	ÄI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	40+

5.0028-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	Continued in
U9	BM MC2320 MIXER	1085.2139.00	WATKINS-JO	MC2320	
U10	MIXER MODULE BM SME1400B-17 MIXER MIXER MODUL	1085.2145.00	WATKINS-JO	SME1400B-17	
V1	AE BAR64-04 CA 2X PIN	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
..9	SILICON PIN DIODE				
V10	AK BC860B P 45V 200MA	AK 0007.7975.00	MOTOROLA	BC860B	
	TRANSISTOR				
V11	AK BC860B P 45V 200MA	AK 0007.7975.00	MOTOROLA	BC860B	
	TRANSISTOR				
V12	AE BZX284-B5V6 0,4W ZDI	0048.4129.00	PHILIPS_SE	BZX284-B5V6	
	ZENER DIODE				
V13	AE BZX284-B5V6 0,4W ZDI	0048.4129.00	PHILIPS_SE	BZX284-B5V6	
	ZENER DIODE				
V14	AD BAS16 75V UDI	AD 0007.4924.00	VALVO	BAS16 (A6P)	
..17	HIGH-SPEED DIODE				
V18	AK BC860B P 45V 200MA	AK 0007.7975.00	MOTOROLA	BC860B	
	TRANSISTOR				
V19	AK BFP450 NPN 4,5V 100MA	4048.1483.00	SIEMENS	BFP450 (-F1590)	
	RF-TRANSISTOR NPN				
V20	AK BFP450 NPN 4,5V 100MA	4048.1483.00	SIEMENS	BFP450 (-F1590)	
	RF-TRANSISTOR NPN				
V21	AE BZX284-B6V8 0,4W ZDI	0048.3545.00	PHILIPS_SE	BZX284-B6V8	
	ZENER DIODE				
V22	AE BZX284-B6V8 0,4W ZDI	0048.3545.00	PHILIPS_SE	BZX284-B6V8	
	ZENER DIODE				
V23	AD BAS16 75V UDI	AD 0007.4924.00	VALVO	BAS16 (A6P)	
	HIGH-SPEED DIODE				
V24	AD BAS16 75V UDI	AD 0007.4924.00	VALVO	BAS16 (A6P)	
	HIGH-SPEED DIODE				
V25	AE BAT15-03W SCHOTTKY	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
	SCHOTTKY DIODE				
V26	AK BC850B N 45V 200MA	AK 0007.7969.00	VALVO	BC850B	
..28	TRANSISTOR				
V29	AE BZV55/C5V1 0.5W ZDI	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
	ZENER DIODE				
V30	AK BC857S 2XP 45V 100MA	1100.4349.00	SIEMENS	BC857S (Q62702-2373)	
	PNP TRANSISTOR ARRAY				
V31	AE BZX284-B6V8 0,4W ZDI	0048.3545.00	PHILIPS_SE	BZX284-B6V8	
	ZENER DIODE				
V32	AK BC857S 2XP 45V 100MA	1100.4349.00	SIEMENS	BC857S (Q62702-2373)	
	PNP TRANSISTOR ARRAY				
V33	AE BZX284-B5V1 0,4W ZDI	0048.3516.00	PHILIPS_SE	BZX284-B5V1	
	ZENER DIODE				
V34	AK BC857S 2XP 45V 100MA	1100.4349.00	SIEMENS	BC857S (Q62702-2373)	
..37	PNP TRANSISTOR ARRAY				
V38	AE BAR63-03W PIN	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
	PIN DIODE				
V39	AE BZX284-B8V2 0,4W ZDI	0048.4306.00	PHILIPS_SE	BZX284-B8V2	
	ZENER DIODE				
V40	AE BZX284-B8V2 0,4W ZDI	0048.4306.00	PHILIPS_SE	BZX284-B8V2	
	ZENER DIODE				
V41	AK BC857S 2XP 45V 100MA	1100.4349.00	SIEMENS	BC857S (Q62702-2373)	
..49	PNP TRANSISTOR ARRAY				
V50	AE HSMS2800 SCHOTTKY	AE 0836.8421.00	HEWLETT_PA	HSMS-2800(#L31)	
	SCHOTTKY DIODE				
V51	AE HSMS2800 SCHOTTKY	AE 0836.8421.00	HEWLETT_PA	HSMS-2800(#L31)	
	SCHOTTKY DIODE				
V52	AE BZX284-B5V6 0,4W ZDI	0048.4129.00	PHILIPS_SE	BZX284-B5V6	
	ZENER DIODE				
V53	AE BB833 9,3/0,75PF CDI	1051.4751.00	SIEMENS	BB833 (-B628)	
	VARIABLE CAPACITOR				
V54	AE BB833 9,3/0,75PF CDI	1051.4751.00	SIEMENS	BB833 (-B628)	
	VARIABLE CAPACITOR				
V55	AK BC857S 2XP 45V 100MA	1100.4349.00	SIEMENS	BC857S (Q62702-2373)	
	PNP TRANSISTOR ARRAY				
V56	AK BC857S 2XP 45V 100MA	1100.4349.00	SIEMENS	BC857S (Q62702-2373)	
	PNP TRANSISTOR ARRAY				
V57	AE BZX284-B5V1 0,4W ZDI	0048.3516.00	PHILIPS_SE	BZX284-B5V1	
	ZENER DIODE				
V58	AE BZX284-B10 0,4W ZDI	0048.3551.00	PHILIPS_SE	BZX284-B10	
	ZENER DIODE				
V59	AE BB833 9,3/0,75PF CDI	1051.4751.00	SIEMENS	BB833 (-B628)	
	VARIABLE CAPACITOR				
V60	AE BAR63-03W PIN	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
	PIN DIODE				

Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	877 3PLU	Äl	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	41+

wir uns alle Rechte vor.

Zeichn.- Comp. No.	Bezeichnung Designation	Stock No.	Manufacturer	Designation	contained in
V61	AE BZX284-B5V1 0,4W ZDI ZENER DIODE	0048.3516.00	PHILIPS_SE	BZX284-B5V1	
V62	AE BZX284-B3V3 0,4W ZDI ZENER DIODE	0048.3474.00	PHILIPS_SE	BZX284-B3V3	
V63	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V64	AE BZX284-B6V2 0,4W ZDI ZENER DIODE	0048.5348.00	PHILIPS_SE	BZX284-B6V2	
V65	AE BZX284-B6V2 0,4W ZDI ZENER DIODE	0048.5348.00	PHILIPS_SE	BZX284-B6V2	
V66	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V67	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V70	AE BZX284-B5V1 0,4W ZDI ZENER DIODE	0048.3516.00	PHILIPS_SE	BZX284-B5V1	
V71	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V72	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V73	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
V74	AE BZX284-B3V3 0,4W ZDI ZENER DIODE	0048.3474.00	PHILIPS_SE	BZX284-B3V3	
V75	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
V76	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V77	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V78	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
V79	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V80	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V81	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
V82	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
V83	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V84	AE BB833 9,3/0,75PF CDI VARACTOR	1051.4751.00	SIEMENS	BB833 (-B628)	
V85	AE BB833 9,3/0,75PF CDI VARACTOR	1051.4751.00	SIEMENS	BB833 (-B628)	
V86	AD BAS216 75V UDI HIGHSPEED SWITCHING DIODE	0010.9346.00	PHILIPS_SE	BAS216	
V87	AK BFP450 NPN 4,5V 100MA RF-TRANSISTOR NPN	4048.1483.00	SIEMENS	BFP450 (-F1590)	
V90	AM SHFO186 9V GAASF 0.5-12GHZ GAAS FET	1085.2268.00	STANFORD_M	SHF-0186	
V91	AM SHFO186K 9V GAASF 0.5-4GHZ GAAS FET	1085.1655.00	STANFORD_M	SHF-0186K4230TR	
V92	AM SHFO186 9V GAASF 0.5-12GHZ GAAS FET	1085.2268.00	STANFORD_M	SHF-0186	
V94	AM SHFO186 9V GAASF 0.5-12GHZ GAAS FET	1085.2268.00	STANFORD_M	SHF-0186	
V95	AM SHFO186 9V GAASF 0.5-12GHZ GAAS FET	1085.2268.00	STANFORD_M	SHF-0186	
V104	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V105	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V116	AE BZX284-B5V1 0,4W ZDI ZENER DIODE	0048.3516.00	PHILIPS_SE	BZX284-B5V1	
V117	AE BAR63-04 CA 2X PIN DUAL PIN DIODE	1039.1491.00	SIEMENS	BAR63-04 (-A1037)	
V131	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V137	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V138	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V143	AE HSMS2800 SCHOTTKY SCHOTTKY DIODE	AE 0836.8421.00	HEWLETT_PA	HSMS-2800(#L31)	
V147	AE HSMS2800 SCHOTTKY SCHOTTKY DIODE	AE 0836.8421.00	HEWLETT_PA	HSMS-2800(#L31)	


1GPK	877 3PLU	Ai	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	42+



5.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.

Comp. No.	Description	Stock No.	Manufacturer	Designation
V157	AK BCP68-16 N 20V TRANS MEDIUM POWER TRANSISTOR	0008.2019.00	PHILIPS	BCP68-25
V159	AK BCP68-16 N 20V TRANS MEDIUM POWER TRANSISTOR	0008.2019.00	PHILIPS	BCP68-25
V160 ..168	AE BB833 9,3/0,75PF CDI VARACTOR	1051.4751.00	SIEMENS	BB833 (-B628)
V169	AE BZX284-B2V7 0,4W ZDI ZENER DIODE	0048.3345.00	PHILIPS_SE	BZX284-B2V7
V172 ..177	AE BB833 9,3/0,75PF CDI VARACTOR	1051.4751.00	SIEMENS	BB833 (-B628)
V180	AM SI9410DY N-E 30V MOSF MOSFET	1081.0354.00	SILICONIX	SI9410DY
V181	AM SI9410DY N-E 30V MOSF MOSFET	1081.0354.00	SILICONIX	SI9410DY
V186	AE HSMS2825 1+1 SCHOTTKY SCHOTTKY DIODE PAIR	1010.6214.00	HEWLETT_PA	HSMS2825 L31
V191	AM SI9435DY P-E 30V MOSF MOSFET	1081.0277.00	SILICONIX	SI9435DY
V192 ..196	AM BSS138 N-E 50V MOSF MOSFET	0520.7740.00	SIEMENS	BSS138 (-S566)
V197	AE BB833 9,3/0,75PF CDI VARACTOR	1051.4751.00	SIEMENS	BB833 (-B628)
V198	AE BB833 9,3/0,75PF CDI VARACTOR	1051.4751.00	SIEMENS	BB833 (-B628)
V199	AE BZX284-B2V7 0,4W ZDI ZENER DIODE	0048.3345.00	PHILIPS_SE	BZX284-B2V7
X1 ..8	FJ EINLOETSTECKER GER SMP CONNECTOR	1093.6481.00	ROSENBERGE	19S-101-40M-E4
X9	FJ EINLOETBUCHSE MMCX CONNECTOR	1085.1532.00	SUHNER	82MMCXS50-0-2/111KG
X10	FP STIFTLISTE 4P SMD CONNECTOR	1093.6823.00	AMP	966926-2
X12	FJ EINLOETSTECKER GER SMP CONNECTOR	1093.6481.00	ROSENBERGE	19S-101-40M-E4
X14 ..20	FP STIFTLISTE 4P SMD CONNECTOR	1093.6823.00	AMP	966926-2
X500	FP STECKERLEISTE 32POL. CONNECTOR 32P.	FP 0008.5718.00	DEUT_ELCO	16 8457 064 002 027
X501 ..504	FJ EINLOETBUCHSE MMCX CONNECTOR	1085.1532.00	SUHNER	82MMCXS50-0-2/111KG
Z1	LD T-FILTER 3,3NF SMD SMD-FILTER	1039.1362.00	MURATA	NFM61R20T332T1
Z4 ..10	LD T-FILTER 3,3NF SMD SMD-FILTER	1039.1362.00	MURATA	NFM61R20T332T1
Z12 ..19	LD T-FILTER 100PF SMD SMD-FILTER	1039.1356.00	MURATA	NFM61R00T101T1
Z20	LD PI-FILTER 2X1NF SMD SMD-CERAMIC-PI-FILTER	4024.7152.00	TUSONIX	4700-003
Z22	LD PI-FILTER 2X1NF SMD SMD-CERAMIC-PI-FILTER	4024.7152.00	TUSONIX	4700-003
Z23	LD PI-FILTER 2X1NF SMD SMD-CERAMIC-PI-FILTER	4024.7152.00	TUSONIX	4700-003
Z24	LD T-FILTER 3,3NF SMD SMD-FILTER	1039.1362.00	MURATA	NFM61R20T332T1
Z25	LD PI-FILTER 2X1NF SMD SMD-CERAMIC-PI-FILTER	4024.7152.00	TUSONIX	4700-003
Z26	LD PI-FILTER 2X1NF SMD SMD-CERAMIC-PI-FILTER	4024.7152.00	TUSONIX	4700-003

1GPK	877 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
 ROHDE & SCHWARZ	14	22.09.99	EE 6-GHZ-ERWEITERUNG 6GHZ EXTENSION	1084.9600.01 SA	43-	

095.0026-0693

XY-Liste

XY List

Erklärung der Spaltenbezeichnungen:

el. Kennz.	Bauelement-Kennzeichen
Seite	Leiterplatten-Seite, auf der sich das Bauelement befindet
X/Y	Koordinaten (in Millimeter) des Bauelementes auf der Leiterplatte bezogen auf den Nullpunkt
Planq., Bl.	Planquadrat und Seite des Schaltbildes für das jeweilige Bauelement


Explanation of column designations:

Part	Identification of instrument part
Side	Side of the PC board on which instrument part is positioned
X/Y	Coordinates (in units of millimeters) of the component on the PC board in reference to zero point
Sqr, Pg	Square and page of the diagram for the respective instrument part

Service--Relevante Bauteile / Service--Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
P1	B	41	128	6D	12	P8	B	263	30	6A	29	R394	B	254	59	4B	30
P3	B	263	44	6E	29	R173	A	255	137	4D	30	R848	B	105	107	2E	8


Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

 ROHDE & SCHWARZ	Benennung: EE 6-GHZ-ERWEITERUNG Designation: 6-GHZ-EXTENSION		Sprache: Lang.: de	Blatt: Sh.: 1 +	Aei: C.I.: 08.01
	Typ: SMIQ Type: SMIQ	Datum: 99-09-30 Date: 99-09-30	Abteilung: 1GPK Dpt: 1GPK	Name: HO Name: HO	Sachnr.: 1084.9600.01 XY Part No.: 1084.9600.01 XY

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
Z26	B	125	23	3E	36												

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

 ROHDE & SCHWARZ	Benennung: EE 6-GHZ-ERWEITERUNG Designation: 6-GHZ-EXTENSION		Sprache: Lang.: de	Blatt: Sh.: 14 -	Aei: C.I.: 08.01
	Typ: SMIQ Type: SMIQ	Datum: 99-09-30 Date: 99-09-30	Abteilung: 1GPK Dpt: 1GPK	Name: HO Name: HO	Sachnr.: 1084.9600.01 XY Part No.: 1084.9600.01 XY



ROHDE & SCHWARZ

SERVICE INSTRUCTIONS

IQ-CONVERTER MODULE

1084.9300.02

Contents

7.	Testing and Repair of the Module	5
7.1	Function Description	5
7.1.1	Harmonic Filter.....	5
7.1.2	Doubler Path.....	6
7.1.3	LO Amplifier and Level Control.....	6
7.1.4	Bypass for CW Mode.....	6
7.1.5	IQ Mode.....	6
7.1.6	Tunable Bandpass Filters.....	7
7.1.6.1	1st Filter 750 to 1800 MHz.....	8
7.1.6.2	2nd Filter 1800 to 2500 MHz.....	8
7.1.6.3	3rd Filter 2500 to 3300 MHz.....	8
7.1.6.4	RF Switch for the IQ Filters.....	8
7.1.7	Output Unit and CW Level Control.....	9
7.2	Test Instruments and Utilities	9
7.3	Troubleshooting	9
7.3.1	Level Control Out of Tolerance.....	9
7.3.2	Level Error.....	10
7.3.3	Spectral Purity of the Output Signal FIQFIL.....	11
7.4	Testing and Adjustment	12
7.4.1	Testing Data Transmission and Power Supply.....	12
7.4.2	Harmonic Filter Test.....	13
7.4.2.1	Testing the Tuning Voltages.....	13
7.4.2.2	Performance of the Harmonic Filter.....	13
7.4.3	Doubler Path Test.....	14
7.4.3.1	Testing the Tuning Voltages.....	14
7.4.3.2	Working Points of the Buffer Amplifiers.....	14
7.4.3.3	Performance of the Doubler Path.....	14
7.4.3.4	Level Adjustment in the Doubler Path.....	15
7.4.4	Checking Level Control.....	15
7.4.4.1	Checking the Working Points of the Amplifiers in the Controls	15
7.4.4.2	Testing the Common Level Control Element.....	16
7.4.4.3	Testing Detector and Control Amplifier CW.....	16
7.4.4.4	Level Adjustment CW.....	17
7.4.4.5	Testing Detector and Control Amplifier LO.....	17
7.4.4.6	LO Level Adjustment.....	18
7.4.5	Test of the Common RF Path with IQ.....	18
7.4.5.1	Testing the Level Preset Element.....	18
7.4.5.2	Checking the Working Points of the Broadband Amplifiers.....	19
7.4.5.3	Performance of the Mixer and the Broadband Amplifier.....	19
7.4.6	Testing the IQ Filters.....	19
7.4.6.1	Testing the Tuning Voltages.....	20
7.4.6.2	Working Points of the Buffer Amplifiers.....	20
7.4.6.3	Checking Typical RF Levels.....	21
7.4.6.4	Filter Calibration and Level Adjustment of the IQ Filters	21
7.4.7	Tables and Interfaces.....	21
7.4.7.1	List of Diagnostic Test Points.....	21
7.4.7.2	Typical Graph of the Filter Tuning Voltages.....	22
7.4.7.3	Digital Interface.....	23
7.4.7.4	Typical RF Levels.....	25
7.5	Removal and Assembly	26
7.6	External Interfaces	27

Parts list
List of coordinates
Circuit diagram
Components layout diagram

7. Testing and Repair of the Module

7.1 Function Description

The IQ-Converter module (IQCON) can be operated either in the vector modulation or the CW mode.

With vector modulation selected, (IQ-mode) the module converts the IQ-modulated 300-MHz input signal (X223) of the IQ modulator (IQMOD board) to the frequency range 750 to 3300 MHz. The frequencies 750 to 1500 MHz of the summing module or SMT synthesizer (input X221) are used as LO signal. These frequencies are doubled in a second path in order to obtain the required frequency spectrum of 1050 to 3000 MHz at the LO. The tunable bandpass filters from 750 to 3300 MHz are provided to filter the unwanted sideband and all other frequencies occurring with mixing. A level control element (Level Preset) in conjunction with fixed adjustments in the three filter paths are provided to compensate for the level tolerances occurring as well as for the level frequency response. The calibration data required for setting the filters are stored in an EEPROM accommodated on the board. In CW mode, the LO signal is routed via a pin diode switch and a solid-jacket cable W22 to the output amplifier. The frequency spectrum ranges from 450 to 3000 MHz. The frequencies from 3000 to 3300 MHz are obtained by mixing in the IQ path. In both operating modes, the output amplifier supplies the required output level of 4 dBm.

The module can be subdivided into the subsequent function units:

- harmonic filter
- frequency doubler and filter for the subharmonics
- LO amplifier with switch-selectable level control
- bypass for CW mode
- mixer and low-noise broadband amplifier
- tunable bandpass filters
- RF switch and output amplifier
- control and EEPROM

7.1.1 Harmonic Filter

(circuit diagram, sheet 2)

The tunable harmonic filter filters the harmonics of the output signal of the summing module or the SMT synthesizer in the frequency range 450 to 1500 MHz.

Eight capacity diodes V153 - V160 arranged in parallel anti-serially in the two poles of the Cauer filter, are provided as tunable filter elements. The two poles of the filter are tuned via the common tuning voltage OWFIL.

The pin-diode switches V32-V37 are provided to switch over to the doubler path.

7.1.2 Doubler Path

(sheets 3 and 4 of circuit diagram)

The SMD component SFD 1001 (N8) is provided as frequency doubler for generation of the frequency octave 1500 to 3000 MHz. The required input level 10 dBm of the fundamental wave (750 to 1500 MHz) is generated using the integrated GaAs-FET amplifier N17. Its working point is controlled by means of the transistor V30. Spurious which occur with frequency doubling are suppressed to -74 dBc by a combination of two switchable highpass filters and two tunable lowpass filters. The necessary amplification of level as well as decoupling of filters is accomplished by the use of bipolar amplifiers with a gain of 7 dB, each (V148 - V150). Their current in the working point is controlled via the transistors V27, V28 and V31.

The capacity diodes V191-192, V198-201 and V180-185 are used as tuning elements of the filters. They are adjusted by means of the DC voltages TUNEVD, TUNEVD2 and VDFIL.

The different levels in the doubler path and in the harmonic filter path are adjusted using the potentiometer R694.

7.1.3 LO Amplifier and Level Control

(sheet 5 of circuit diagram)

The GaAs-Fet amplifier (V106) provides the 17-dBm level required for control of the LO input of the mixer. It can be switched off in CW mode.

The total gain of the four-stage amplifier chain is approx. 34 dB. The prestages are set up using the bipolar transistors V186 and V147 and the GaAs-Fet transistor V107. All currents are controlled in the working point. (V3-V6).

The level deviations occurring throughout the entire LO path are compensated by a control. A pin-diode modulator (V42 and V38) is used as control element for amplitude control. This modulator is controlled by the PI control amplifier N18. The rated level is provided via the potentiometer R494. The detector diode V59 allows for measuring the RF level. A similar diode (V58) is used for temperature compensation. The bandwidth of level control is approx. 5 to 100 kHz.

7.1.4 Bypass for CW Mode

(sheets 5 and 13 of circuit diagram)

After passing the LO prestages, the signal is routed via the solid-jacket cable W22 to the output stage using the two pin-diodes switches V39-41 and V46-48. Since the output frequency is offset by 300 MHz in the IQ mode, the latter must provide an attenuation of approx. 70 dB to avoid that the LO frequency applied to the switch occurs as a non-harmonic spurious.

7.1.5 IQ Mode

(sheet 6 of circuit diagram)

The IQ mixer (U8) is the nucleus of the IQ converter. It generates the IQ-modulated output frequencies between 750 and 3300 MHz. Due to the high output frequencies, the mixer is operated in inverted mode. The 300-MHz signal (-11 dBm) generated by the IQ modulator is applied to the IF input of the mixer. The mixer suppresses the mixing products up to ± 300 MHz offset from the carrier, since they are not filtered.

The lower sideband of mixing is used for output frequencies up to 1800 MHz. Frequencies above 1800 MHz are up-converted. The upper sideband is used above 1800 MHz in order to obtain the frequency spectrum up to 3300 MHz.

The output frequencies (750 to 3300 MHz) at the RF port of the mixer are amplified by approx. 10 dB by means of the succeeding broadband amplifier (travelling-wave amplifier with transistors V100-V102). The second succeeding stage with the GaAs-Fet V109 increases the level again by approx. 11 dB. At both stages, the current in the working point is controlled via the transistors V21 and V23.

The following fixed 7th-order Cauer highpass has a cut-off frequency of 700 MHz and suppresses unwanted fixed mixing products.

Level Preset (level control element V54) is intended to be used for compensating the level frequency output of the IQ path and the temperature drift. In a calibration routine, the level is corrected within a fixed frequency stepping until the rated level of 4 dBm is reached at the output. The level detector (V61, sheet 13 of circuit diagram) is used as test point. The level control element is set via a current source with difference amplifier (signal LPRE1, V24-V26)

7.1.6 Tunable Bandpass Filters

The tunable bandpass filters filter the unwanted mixing products of the IQ mixer ≥ 300 MHz from the carrier. The poles of all filters are adjusted such that optimum attenuation of the unwanted mixing products and optimum amplitude distortion in the passband (± 30 MHz) are obtained. In the passband, the filters provide a typical amplitude distortion of < 0.025 dB/MHz and a typical group delay of < 15 ps/MHz.

The filters are set using the three tuning voltages IQFIL1, IQFIL2 and IQFIL3. The set voltage applies only for the currently operating filter. The tuning voltage ranges from 0 to 21 V and provides 8-bit resolution. The filter setting values are obtained with board pretesting and stored in the EERPOM (D17, sheet 14 of circuit diagram).

New calibration of the filters is only required, if filter parts have to be replaced.

7.1.6.1 1st Filter 750 to 1800 MHz

(sheets 7 and 8 of circuit diagram)

The first filter mainly provides a lowpass character, since the critical frequencies are above the carrier. It contains three identical lowpass filters, which are tuned by means of the capacity diodes V166-V169, V171 -V172 and V213-V215.

A tunable highpass filter incorporated in the capacity diodes V170 and V189-V190 is located between the second and the third lowpass filter. It attenuates the spurious below the carrier. Another highpass filter with a cut-off frequency of 700 MHz is provided at the output of this filter path in order to suppress fixed mixing products.

Buffer amplifiers (GaAs-Fet MMIC's N12-N14 and N21) provided between the filters for decoupling purposes. Gain adjustment in this filter path is accomplished via a pin-diode control element by means of the potentiometer R692. The attenuation of the latter depends on the temperature (R549) and compensates the typical level temperature response.

Three of the four buffer amplifiers are switched off by the power supply if the filter is not in operation.

7.1.6.2 2nd Filter 1800 to 2500 MHz

(sheets 9 and 10 of circuit diagram)

The second IQ filter mainly provides a highpass function, since the upper sideband of mixing is used. It consists of three identical 5th-order highpass filters the poles of which are tuned via the capacity diodes V187-V188, V164-V165, V218 and V212.

A tunable lowpass filter (capacity diodes V161-V163) provides for attenuation of the mixing products above the upper sideband. A fixed, printed lowpass filter with a cut-off frequency of approx. 2600 MHz at the filter output suppresses the 2nd and 3rd-order LO mixing products.

The traveling-wave amplifier V91-V93 and the MMIC amplifiers N10, N11 and N20 are used as buffer stages between the filters. R691 is provided for level adjustment in this filter.

7.1.6.3 3rd Filter 2500 to 3300 MHz

(sheets 11 and 12 of circuit diagram)

Filter 3 is set up similar to filter 2. The three highpass filters are tuned by the capacity diodes V173-V176 and V216-V217. The tunable lowpass filter is located at the filter output and is adjusted via the diodes V177-V179. It is decoupled via the amplifiers V94-V96, N15-N16 and N22.

7.1.6.4 RF Switch for the IQ Filters

(sheets 6 and 13 of circuit diagram)

Pin-diode switches are provided (V19, V22 and V202 at the filter input and V49-V53 at the filter output).

The current required for biased operation of the diodes is supplied by the operational amplifiers N4 and N5 (signals IQCH1, IQCH2 and IQCH3).

7.1.7 Output Unit and CW Level Control

(sheet 13 of circuit diagram)

The required 4-dBm output level is generated by the two amplifier stages N23 and V108, the MMIC amplifier N23 being provided in the IQ path, only.

The selector switch for selection between IQ or CW mode (pin diode switch V46-V48) is accommodated between the amplifiers.

In CW mode, the level detector (V61) following the final amplifier controls the output level which must assume a fixed value. N19-1 is used as difference amplifier which amplifies the detected RF voltage, N19-2 functions as PI control amplifier. The pin-diode modulator of the LO level control works as level control element (cf. 7.1.3). The rated output level is set using the potentiometer R495. The two paths can be switched over via the integrated switch D3.

In IQ mode, the level detector V61 is used for level-*pr*eset calibration (cf. 7.1.5).

7.2 Test Instruments and Utilities

- Power supply (e.g., NGT35)
- Rf spectrum analyzer up to 5 GHz (e.g., FSEB, FSB)
- DC voltmeter, ammeter (UDS5)

7.3 Troubleshooting

The test program contained in the service kit provides versatile diagnosis facilities which is why it is just as well suited for error diagnosis. The rated values and the typical values of the filter tuning voltages, which are measured via the diagnosis while troubleshooting can be looked up under 7.4.7.1 and 7.4.7.2.

Prior to troubleshooting, check, whether the respective data have been transferred correctly (7.4.7.3) and whether the important reference and control voltages (7.4.1) are provided.

7.3.1 Level Control out of Tolerance

Error message "IQCON ALC LOOP FAILURE"

First check, which operating mode and which frequencies are effected by the level control failure

only for frequencies from 450 to 1500 MHz in CW mode and 750 to 1200 MHz with vector modulation

Error with harmonic filter, check diagnostic points 2003 and 2011, harmonic filter test acc. to 7.4.

Error with RF switch; check whether pin diodes V32, V33 and V35, V37 are forward biased (CH2ON: -12 V, CH1ON: -12 V)

only for frequencies 0.3 to 450 MHz, 1500 to 3300 MHz in CW mode and 0.3 to 750 MHz, 1200 to 3300 MHz with vector modulation

Error in the doubler path; check diagnoses 2004 and 2012, perform doubler path test acc. to 7.4.3

Error with RF switch; check whether pin diodes V32, V34 and V36, V37 are forward biased (CH2ON: 12 V, CH1ON: -12 V)

Error with level control element V55; measure voltage drop at R534, typ. 0.2 to 4 V

Error in the RF path (7.4.7.4)

in CW mode, only, with all frequencies

Check detector and control amplifier CW acc. to 7.4.4.3; perform level adjustment CW acc. to 7.4.4.4

Error with RF switch; check whether pin V39, V41 and V46, V48 are forward biased (LO-ON: -12 V, IQOFF: 12 V)

with vector modulation, only, all frequencies

Check working point LO amplifier V106 with vector modulation switched on (7.4.4.1)

Check detector and control amplifier LO acc. to 7.4.4.5, perform level adjustment LO acc. to 7.4.4.6

Error with RF switch; check whether pin diodes V39 and V40 are forward biased (LO-ON: 12 V)

in both operating modes, all frequencies

Check RF level at the output harmonic filter or doubler path via diagnosis 2011 and 2012; if no level is provided, the error is located in the harmonic filter or in the doubler path: see above for troubleshooting H

Check working points of the RF amplifiers in the control (7.4.4.1) and common level control (7.4.4.2)

Check switch D3 for control switchover

7.3.2 Level Error

Level out of tolerance with CW	Perform level adjustment acc. to 7.4.4.4
Level out of tolerance with vector modulation	Perform level-preset calibration
Error with level-preset calibration	Check diagnosis 2015 in CW mode, perform level adjustment CW acc. to 7.4.4.4, if required; make sure that the diagnosis works correctly
	Check the common RF path with vector modulation; perform tests 7.4.5.1 - 7.4.5.3 successively, note instructions to 7.4.5
	depending on which frequency the level-preset calibration is interrupted at, the error is located in one of the tunable IQ filters, perform test 7.4.6 for the corresponding filter
	Check whether the pin diodes in the RF switches preceding and following the IQ filters are forward biased; check control voltages to ± 12 V: IQCH1, IQ1IN, IQCH2, IQ2IN, IQCH3 and IQ3IN
	Error in the RF path (7.4.7.4)

7.3.3 Spectral Purity of the Output Signal FIQFIL

bad harmonics spectrum with CW	Harmonic filter test acc. to 7.4.2 for frequencies from 450 to 1500 MHz
	Test of doubler path acc. to 7.4.3 for frequencies > 1500 MHz
	Check working points of the RF amplifiers in the CW level control (7.4.4.1)

bad harmonic spectrum with vector modulation	Perform level-preset calibration
	Measure working points of the broadband amplifiers (7.4.5.2)
	Check working points of the buffer amplifiers in the IQ filters depending on the frequency range (7.4.6.2)
Subharmonic spurious for frequencies from 1500 to 3000 MHz in CW mode	Perform test of the filter tuning voltages in the doubler path acc. to 7.4.3.1
	Error with RF switch, check whether pin diodes V32, V33 or V35, V37 are reverse biasing, check switching voltages (CH2ON: 12 V, CH1ON: -12 V)
Nonharmonic spurious with vector modulation at ± 300 MHz or ± 600 MHz from the carrier	Check filter tuning voltages acc. to 7.4.6.1
Nonharmonic spurious with 600 MHz	Perform level-preset calibration
	Check working points of the amplifiers in the RF path (7.4.5.2 and 7.4.6.2)

7.4 Testing and Adjustment

All measured values given without tolerances are recommended values. Voltages given without further information mean DC voltages.

The service kit contains an adaptor to make the module accessible. The adaptor is plugged into the chassis instead of the module and the RF connections at X221 and X223 are connected. A measurement cable is connected to the RF output X227. Then, the module can be plugged into the adaptor.

Prior to each test, a PRESET on the instrument causes the module to assume a defined state. If no further information is given with frequency settings, CW operation is assumed.

Tests in IQ mode (VECTOR MOD:STATE ON) require a voltage of 0.5 ± 0.01 V to be applied to the front unit.

7.4.1 Testing Data Transmission and Power Supply

(cf. sheets 14-17 of circuit diagram)

According to the instrument standard, the IQCON module is controlled via a serial interface using the SERBUS-D component. Data for setting the module are transmitted via subaddress 1. The second subaddress is provided for data traffic with the EEPROM, which contains the complete calibration data for filter control. The MSB is first transmitted for board setting and is applied at Q8 (pin 11) of the corresponding latch. Settings and associated data are given in Section 7.4.7.3.

The power consumption of the module can be checked by looping in an ammeter instead of the coils L3, L4, L5, L304 and L305 (7.6). The most important reference and supply voltages are checked using a DC voltmeter.

Test point	Type of voltage	Voltage [V]
P9	Reference for all regulated voltages	10 ± 0.02
P10	Reference voltage for generation of the filter tuning voltages	10 ± 0.02
P11	Reference voltage for working point and level controls	-10 ± 0.02
P7	Regulated supply voltage for RF amplifier	4.54 ± 0.1
P12	Regulated supply voltage for RF amplifier and reference voltage	6.65 ± 0.1

7.4.2 Harmonic Filter Test

Prior to checking the RF response of the harmonic filter (7.4.2.2), it is advisable to check the filter tuning voltages acc. to 7.4.2.1 or the transmitted data acc. to 7.4.7.3.

7.4.2.1 Testing the Tuning Voltages

(cf. sheet 2 of circuit diagram)

- Set frequencies acc. to the table below and measure tuning voltages using a DC voltmeter.

Setting	Voltage OWFIL [V]	Voltage at C15 [V]
FREQ 450.1 MHz	0.4 to 2.5	0.3 to 2
FREQ 1500 MHz	21 ± 0.3	16.1 ± 0.3

7.4.2.2 Performance of the Harmonic Filter

(cf. sheets 2 and 5 of circuit diagram)

The performance of the harmonic filter with the lower and upper cut-off frequency is measured. A current of 0.2 mA is applied to P4 (remove jumper P4-5) to measure with defined load.

- Connect spectrum analyzer with appropriate RF connectors to the test connector X2

- Settings: **FREQ 450.1 MHZ**
- Measure RF level of fundamental: -23 ± 4 dBm
- Measure RF level of 1st harmonic 900.2 MHz: typ. < -50 dBc
- Measure RF level of 2nd harmonic 1350.3 MHz: typ. < -40 dBc
- Settings: **RF 1100 MHZ**
- Measure RF level of fundamental: -23 ± 5 dBm
- Measure RF level of 1st harmonic 2200 MHz: typ. < -40 dBc
- Measure RF level of 2nd harmonic 3300 MHz: typ. < -40 dBc

7.4.3 Doubler Path Test

Prior to testing the RF response of the doubler filters (7.4.3.3) it is advisable to check the transmitted data acc. to 7.4.7.3, the filter tuning voltages acc. to 7.4.3.1 and the working points of the individual amplifiers acc. to 7.4.3.2.

7.4.3.1 Testing the Tuning Voltages

(cf. circuit diagram 3 and 4)

- Set frequencies acc. to table and measure tuning voltages using a DC voltmeter

Setting	Voltage VDFIL [V]	Voltage VDTUNE [V]	Voltage VDTUNE2 [V]
FREQ 1500.1 MHz	0.15 to 2.5	0.37	0.25
FREQ 2000 MHz	4.5 to 7.5	8.05	5.54
FREQ 3000 MHz	21 ± 0.3	15.9	10.9

7.4.3.2 Working Points of the Buffer Amplifiers

(cf. sheets 3 and 4 of circuit diagram)

- Check typical DC voltages acc. to the table below using a voltmeter

Amplifier	Test point	Rated value[V]
N17	Test pad Q22	3.6 ± 0.1
	UGATE-D1	-1 to 0.5
V149	Test pad Q23	3.7 ± 0.1
	UBASIS-D2	2.4
V148	Test pad Q24	3.7 ± 0.1
	UBASIS-D3	2.4
V150	Test pad Q25	3.7 ± 0.1
	UBASIS-D4	2.4

7.4.3.3 Performance of the Doubler Path

(cf. sheets 2-4 of circuit diagram)

The transmission function of the frequency doubler and of the tunable doubler filter is checked. A current of 0.2 mA is applied to P4 (remove jumper P4-5) to measure with defined load.

The two chambers C and D must be covered by an appropriate metal strip to enable measuring of the respective filter attenuation.

- Connect spectrum analyzer with appropriate RF connectors to test connector X2
- Settings: **FREQ 1500.1 MHZ**
 - Measure RF level of output frequency 1500.1 MHz: -22 ± 5 dBm
 - Measure RF level of 1st subharmonic 750.05 MHz: < -74 dBc
 - Measure RF level of 3rd subharmonic 2250.15 MHz: < -74 dBc
- Settings: **FREQ 2000 MHZ**
 - Measure RF level of output frequency 2000.1 MHz : -22 ± 6 dBm
 - Measure RF level of 1st subharmonic 1000 MHz: < -74 dBc
 - Measure RF level of 3rd subharmonic 3000 MHz: < -74 dBc
- Settings: **FREQ 3000 MHZ**
 - Measure RF level of output frequency 3000.1 MHz: -22 ± 6 dBm
 - Measure RF level of 1st subharmonic 1500 MHz: < -74 dBc
 - Measure RF level of 3rd subharmonic 4500 MHz: < -74 dBc

7.4.3.4 Level Adjustment in the Doubler Path

(cf. sheet 3 of circuit diagram)

This level adjustment is intended to adjust the levels in the harmonic path to those in the doubler path. The level control is assumed to work correctly. The board output X227 must be terminated with 50 Ohms..

- Settings: **FREQ 1300 MHZ**
UTILITIES:DIAG:TPOINT: STATE ON
TEST POINT 2013
 - Read off and note diagnosis voltage
- Settings: **FREQ 2000 MHZ**
 - Adjust diagnosis voltage to noted value using R694

7.4.4 Checking Level Control

7.4.4.1 Checking the Working Points of the Amplifiers in the Controls

(cf. sheets 5 and 13 of circuit diagram)

- Check typical DC voltages acc. to the table below using a voltmeter

Amplifier	Test point	Rated value[V]	Note/Setting
V186	Test pad Q1	4.45 ± 0.1	Control of CW and LO
	UBASIS-E1	2.3	
V147	Test pad Q2	4.45 ± 0.1	Control of CW and LO
	UBASIS-E2	2.5	

Amplifier	Test point	Rated value [V]	Note/Setting
V107	Test pad Q3	6 ± 0.2	Control of CW and LO
	UGATE-E1	-1.2 to -0.2	
V106	Test pad Q4	7.4 ± 0.3	only LO control VECTOR MOD:STATE ON
	UGATE-E2	-1.2 to -0.2	
V108	Test pad Q17	7.45 ± 0.3	only CW control
	UGATE-K2	-1.2 to -0.1	

7.4.4.2 Testing the Common Level Control Element

(cf. sheets 5 and 13 of circuit diagram)

The level control element (V42 and V38) is either controlled by the control amplifier of the LO control or by the control amplifier of CW control. The level control range of the control element is typical > 20 dB.

Simultaneously, all amplifiers including the one at the module output are measured. Testing is performed in CW mode.

- Connect spectrum analyzer to X227.
- Remove jumper P4-5 and connect current source to P4.
- Settings: **FREQ 1000 MHZ**
- Apply current from 0 to 10 mA and measure level with 1000 MHz at the module output. Maximum level: > 7 dBm, minimum level < -10 dBm

7.4.4.3 Testing Detector and Control Amplifier CW

(cf. sheet 13 of circuit diagram)

First check, whether the detector diodes V61 and V60 are forward biased correctly. Subsequently, check correct functioning of the detector and the integrator.

Following this test, a level adjustment has to be performed acc. to 7.4.4.4.

- Remove jumper P4-5.
- Connect current source to P4, current 0 mA
- Connect spectrum analyzer to X227
- Settings: **FREQ 1000 MHZ**
- Check whether the two diodes V61 and V60 are forward biased correctly using a DC voltmeter. The forward voltage is approx. 200 mV. The voltage potential at the cathode of the two diodes is approx. -0.2 V.
- Settings: **UTILITIES:DIAG:TPOINT: STATE ON
TEST POINT 2015**
- Measure output voltage of summing amplifier N19-1 via diagnostic point 2015: < 50 mV
- Settings: **TEST POINT 2013**
- Measure output voltage of integrator N19-2 via diagnostic point 2013: > 12 V

- Turn potentiometer R495 fully clockwise
- Slowly increase current at P4 until RF level at X227 is approx. 4 dBm
- Settings: **TEST POINT 2015**
- Measure output voltage of summing amplifier N19-1 via diagnostic point 2015: approx. 220 mV
- Settings: **TEST POINT 2013**
- Measure output voltage of integrator N19-2 via diagnostic point 2013: < 0 V

7.4.4.4 Level Adjustment CW

(cf. sheets 5 and 13 of circuit diagram)

The level is adjusted with closed control loop. The reference value of control is set via R495. Jumper P4-5 is fitted.

- Connect spectrum analyzer to X227
- Settings: **FREQ 1300 MHZ**
- Adjust level to the rated value of 4 ± 0.2 dBm using R495
- There must not occur any noise peaks or secondary lines close to the carrier (± 1 MHz)

7.4.4.5 Testing Detector and Control Amplifier LO

(cf. sheet 5 of circuit diagram)

First check, whether the detector diodes V59 and V58 are forward biased correctly. Subsequently, check correct functioning of the detector and the integrator.

Following this test, a level adjustment has to be performed acc. to 7.4.4.6.

- Remove jumper P4-5.
- Connect current source to P4, current 0 mA
- Connect spectrum analyzer with appropriate connectors to test connector X4
- Settings: **FREQ 1000 MHZ**
 VECTOR MOD:STATE ON
- Check, whether the detector diodes V59 and V58 are forward biased correctly using a DC voltmeter. The forward voltage is approx. 200 mV. The voltage potential at the cathode is approx. -0.2 V.
- Settings: **UTILITIES:DIAG:TPOINT: STATE ON**
 TEST POINT 2013
- Measure output voltage of integrator N18-2 via diagnostic point 2013: > 12 V
- Turn potentiometer R494 fully clockwise

- Slowly increase current at P4 until RF level at X227 is approx. -8 dBm with 1300 MHz
- Measure output voltage of integrator N18-2 via diagnostic point 2013: < 0 V

7.4.4.6 LO Level Adjustment

(cf. sheet 5 of circuit diagram)

The level is adjusted with closed control loop. The reference value of control is set via R494. Jumper P4-5 is fitted.

- Connect spectrum analyzer with appropriate connectors to X4
- Settings:
 - FREQ 1000 MHZ**
 - VECTOR MOD:STATE ON**
- Adjust level with 1300 MHz to the rated value of -8 ± 0.2 dBm using R494
- There must not occur any noise peaks or secondary lines close to the carrier (± 1 MHz)

7.4.5 Test of the Common RF Path with IQ

For checking the RF path between the mixer and the tunable bandpass filters, it is required that the mixer is correctly controlled at its LO and IF inputs.

For checking the LO input with vector modulation switched on, the control voltage can be checked via diagnosis 2013 (7.4.7.1). A 0.5-V DC voltage must be applied to the I or Q input on the front panel to enable generation of the required IF level. The 300-MHz signal can be measured at the output X242 of the IQ modulator.

7.4.5.1 Testing the Level Preset Element

(cf. sheets 6 and 15 of circuit diagram)

The Level-Preset element is controlled via a difference amplifier with current source. The required difference voltage is set via an 8-bit D/A converter (U5).

First, measure the current supplied by the current source and the reference voltage of the difference amplifier.

- Check current by measuring the voltage drop via R70 using a DC voltmeter. The current should be 2 mA. The voltage potential at the base of V25 (pin2) is 3.5 V.
- Setting:
 - FREQ 1000 MHZ**
 - VECTOR MOD:STATE ON**
 - UTILITIES:DIAG:TPOINT: STATE ON**
 - TEST POINT 2002**
- The diagnostic voltage should be between 2.7 V and 2.9 V. Die Diagnosespannung sollte zwischen 2.7 und 2.9 V liegen. The resulting current is used for control of the level preset element. It is typical 100 to 400 μ A and can be measured as voltage drop via R537 using a DC voltmeter.

7.4.5.2 Checking the Working Points of the Broadband Amplifiers

(cf. sheets 6 and 13 of circuit diagram)

➤ Check typical DC voltages acc. to the table below using a voltmeter

Amplifier	Test point	Rated value [V]
V100-102	Test pad Q20	4.5 ± 0.1
	UGATE-F1	-0.5 to 0
V109	Test pad Q21	5.6 ± 0.2
	UGATE-F3	-1.5 to -0.3
N23	Pin 3	5 ± 0.5

7.4.5.3 Performance of the Mixer and the Broadband Amplifier

(cf. sheet 6 of circuit diagram)

Correct functioning of the mixer, the two-stage amplifier and the level preset element are checked.

- Connect spectrum analyzer with appropriate connectors to test connector X3

- Settings: **VECTOR MOD:STATE ON**

➤ Set frequencies acc. to table and measure typical levels at the given frequencies using a spectrum analyzer

Frequency setting [MHz]	Measurement frequency [MHz]	Typical level [dBm]
751	751	-30
	600	< -85
	900	< -100
	1051	< -30
2000	2000	-32
	1700	< -30
3300	3300	-34
	3000	< -25

7.4.6 Testing the IQ Filters

A network analyzer is required to measure exact transmission performance of the tunable IQ filters. For a rough check of correct function, therefore, connectors are provided at the filters which allow for measuring typical levels of the wanted sidebands.

It is advisable, however, to first check the working points and control voltages in the filters.

7.4.6.1 Testing the Tuning Voltages

(cf. sheets 7-12 of circuit diagram)

- Settings: **VECTOR MOD:STATE ON**

➤ Set frequencies acc. to table below and measure tuning voltages directly at the filters using a DC voltmeter

Setting	Voltage IQFIL1 [V]	Voltage IQFIL2 [V]	Voltage IQFIL3 [V]
FREQ 751 MHz	1.2 to 3	1.2 to 3	0.1 to 1.8
FREQ 1800 MHz	10 to 14	13 to 17	13.5 to 18.5
FREQ 1801 MHz	0.2 to 2.5	4.5 to 7	0.4 to 2.4
FREQ 2500 MHz	14 to 21	13 to 19	11 to 16
FREQ 2501 MHz	4.2 to 7.4	3.5 to 6.5	1.2 to 3.5
FREQ 3300 MHz	13 to 18.5	14 to 19.5	11 to 16

7.4.6.2 Working Points of the Buffer Amplifiers

(cf. sheets 7-12 of circuit diagram)

Since some of the amplifiers are switched off, if the respective filters are not used, a frequency setting is required for checking their working points.

- Settings: **VECTOR MOD:STATE ON**

➤ Set corresponding RF frequency and measure typical DC voltages acc. to table using a voltmeter

Setting	Amplifier	Test point	Rated value [V]
FREQ 1000 MHz	N12	Test pad Q9	3.55 ± 0.1
		UGATE-G1	-1.5 to 0.2
	N13	Test pad Q10	3.55 ± 0.1
		UGATE-G2	-1.5 to 0.2
	N21	Test pad Q11	3.55 ± 0.1
		UGATE-G3	-1.5 to 0.2
FREQ 2000 MHz	N14	Test pad Q12	3.55 ± 0.1
		UGATE-G4	-1.5 to 0.2
	V91-V93	Test pad Q5	3.95 ± 0.1
		UGATE-H1	-0.5 to 0
	N10	Test pad Q6	3.55 ± 0.1
		UGATE-H2	-1.5 to 0.2
FREQ 3000 MHz	N20	Test pad Q7	3.55 ± 0.1
		UGATE-H3	-1.5 to 0.2
	N11	Test pad Q8	3.55 ± 0.1
		UGATE-H4	-1.5 to 0.2
FREQ 3000 MHz	V94-V96	Test pad Q13	3.95 ± 0.1
		UGATE-I1	-0.5 to 0
	N15	Test pad Q14	3.55 ± 0.1
		UGATE-I2	-1.5 to 0.2
	N22	Test pad Q15	3.55 ± 0.1
		UGATE-I3	-1.5 to 0.2
N16	Test pad Q16	3.55 ± 0.1	
	UGATE-I4	-1.5 to 0.2	

7.4.6.3 Checking Typical RF Levels

(cf. sheets 6-13 of circuit diagram)

- Connect spectrum analyzer with appropriate connectors to test connectors X6, X5 or X7
- Settings: **VECTOR MOD:STATE ON**
- Set frequencies acc. to table and measure typical levels using a spectrum analyzer

Frequency setting [MHz]	Test connector	Typical level [dBm]
751	X6	-33
	X1	-40
1800	X6	-31
	X1	-34
1801	X5	-31
	X1	-35
2500	X5	-25
	X1	-34
2501	X7	-30
	X1	-35
3300	X7	-26
	X1	-33

7.4.6.4 Filter Calibration and Level Adjustment of the IQ Filters

New filter calibration can only be performed in the factory Memmingen (Board Pretest). This is, however, only required, after replacing either capacity diodes in the IQ filters or the EEPROM containing the calibration data.

Each new calibration must be followed by a level adjustment of the filters. For this purpose, the potentiometers R691-R693 are provided, which allow for adjusting the levels of the three filters to each other. They must not be varied in normal operation.

7.4.7 Tables and Interfaces

7.4.7.1 List of Diagnostic Test Points

(cf. sheet 14 of circuit diagram)

Two diagnosis multiplexers (D13, D14) are provided for monitoring the important control voltages and RF levels.

The potential of the module ground can be measured in order to compensate for offset voltages (diagnosis 2000)

Diagnosis multiplexer 1:

Diagnostic point	Specified range [V]	Remark/Setting
2000	-0.01 to 0.01	Reference 10 kOhm
2001	-9.9 to 10.1	-10V reference voltage, REF-10
2002	2.55 to 4.45	Level-preset voltage, LPRE1
2003	0 to 21	Tuning voltage harmonic filter, OWFIL


Diagnostic point	Specified range [V]	Remark/Setting
2004	0 to 21	Tuning voltage doubler filter lowpass, VDFIL
2005	0 to 21	Tuning voltage IQ filter, sideband, IQFIL1
2006	0 to 21	Tuning voltage IQ filter, LO frequency, IQFIL2
2007	0 to 21	Tuning voltage IQ filter, LO \pm 2*IF, IQFIL3

Diagnosis multiplexer 2:


Diagnostic point	Specified range [V]	Remark/Setting
2008	4.44 to 4.64	Reference voltage 4.54 V, REF4
2009	6.55 to 6.75	Reference voltage 6.55 V, REF6
2010	9.9 to 10.1	Reference voltage 10 V, REF10
2011	0.02 to 0.1	RF level output harmonic filter 450 to 1500 MHz, CW 750 to 1200 MHz, vector modulation
2012	0.02 to 0.1	RF level output doubler path 0.3 to 450 MHz, 1500 to 3300 MHz, CW 0.3 to 750 MHz, 1200 to 3300 MHz, vector mod.
2013	2.4 to 10	Control voltage level control, interrupt Level control CW level, CW Level control LO level, vector modulation
2014	0.1 to 0.6	RF level input IQ filter 0.5 V at I or Q input, vector modulation
2015	0.13 to 0.37	RF level module output FIQFIL constant with CW mode

7.4.7.2 Typical Characteristic of the Filter Tuning Voltages

Diagnosis 2003:


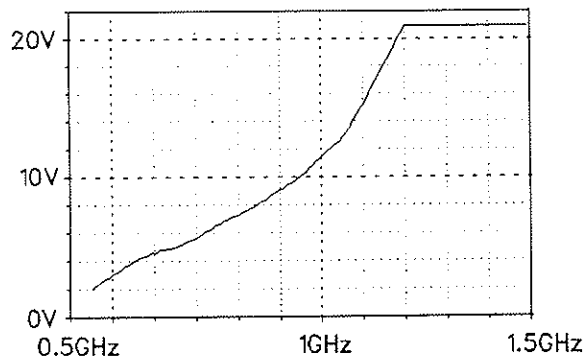


Diagnosis 2004:

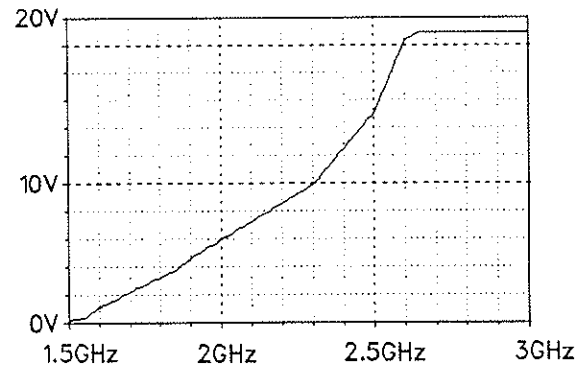


Diagnosis 2005:

Diagnosis 2006:

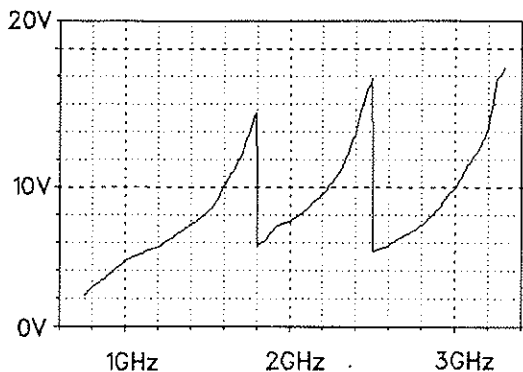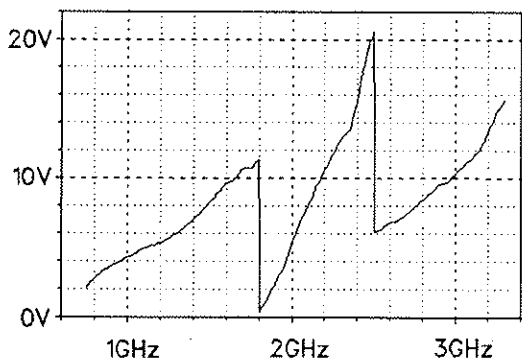

Diagnosis 2007:

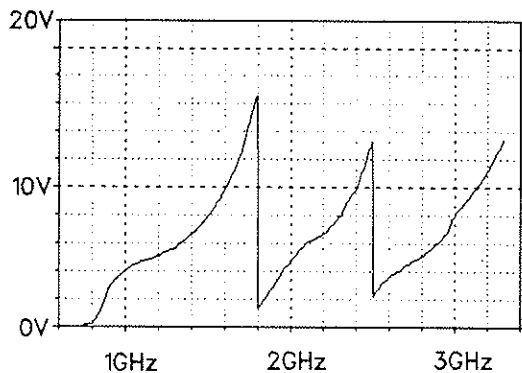

7.4.7.3 Digital Interface

(cf. sheets 14 + 15 of circuit diagram)

The IQCON module is set via a serial interface using the SERBUS-D component, according to the instrument standard. The data for the serial shift registers for the HC4094-Latches are strobed by strobe 1 (SERWR1).

The second subaddress is provided for communication with the onboard EEPROM. The latter contains the tuning values for all tunable filters obtained with filter calibration. The data format corresponds to the R&S standard. External access to the filters is not possible which is why they are not mentioned.

Subaddress 0 (SEROUT, SERCLK1, SERWR1)

Latch		Name	Function	
D11	11	Lpre1_7	Setting for level preset with vector modulation Range from 0 to 255 corresponds to current of 0 to 2 mA through level preset element	MSB
	12	Lpre1_6		
	13	Lpre1_5		
	14	Lpre1_4		
	7	Lpre1_3		LSB
	6	Lpre1_2		
	5	Lpre1_1		
	4	Lpre1_0		
D10	11	Iqfil3_7	Tuning voltage for IQ filters in three ranges, for filtering of $1*LO \pm 2*RF$ 750 to 3300 MHz Range from 0 to 255 corresponds to tuning voltage from 0 to 21 V	MSB
	12	Iqfil3_6		
	13	Iqfil3_5		
	14	Iqfil3_4		
	7	Iqfil3_3		LSB
	6	Iqfil3_2		
	5	Iqfil3_1		
	4	Iqfil3_0		
D9	11	Iqfil2_7	Tuning voltage for IQ filters in three ranges, for filtering of $1*LO$ 750 to 3300 MHz Range from 0 to 255 corresponds to tuning voltage from 0 to 21 V	MSB
	12	Iqfil2_6		
	13	Iqfil2_5		
	14	Iqfil2_4		
	7	Iqfil2_3		LSB
	6	Iqfil2_2		
	5	Iqfil2_1		
	4	Iqfil2_0		
D8	11	Iqfil1_7	Tuning voltage for IQ filters in three ranges, for filtering of second sideband $1*LO \pm 1*RF$ 750 to 3300 MHz Range from 0 to 255 corresponds to tuning voltage from 0 to 21 V	MSB
	12	Iqfil1_6		
	13	Iqfil1_5		
	14	Iqfil1_4		
	7	Iqfil1_3		LSB
	6	Iqfil1_2		
	5	Iqfil1_1		
	4	Iqfil1_0		
D7	11	Vdfil_7	Tuning voltage for lowpass of the subharmonic filter in the doubler path 1500 to 3000 MHz Range from 0 to 255 corresponds to tuning voltage from 0 to 21 V	MSB
	12	Vdfil_6		
	13	Vdfil_5		
	14	Vdfil_4		
	7	Vdfil_3		LSB
	6	Vdfil_2		
	5	Vdfil_1		
	4	Vdfil_0		
D12	11	Owfil_7	Tuning voltage for harmonic filter 450 to 1500 MHz Range from 0 to 255 corresponds to tuning voltage from 0 to 21 V	MSB
	12	Owfil_6		
	13	Owfil_5		
	14	Owfil_4		
	7	Owfil_3		LSB
	6	Owfil_2		
	5	Owfil_1		
	4	Owfil_0		

Latch	Remark	Function			
D6	11	Fil3	Switching bit for IQ filter 3 2500 to 3300 MHz	0=ON 1=OFF	
	12	Fil2	Switching bit for IQ filter 2 1800 to 2500 MHz	0=ON 1=OFF	
	13	Fil1	Switching bit for IQ filter 1 750 to 1800 MHz	0=ON 1=OFF	
	14	Fg2	Switchover bits for highpass filters in the doubler path 0=2300 to 3000 MHz 1=1500 to 1850 MHz 2=1850 to 2300 MHz	MSB LSB	
	7	Fg1			
	6	F1_F2	Switchover bit harmonic filter(F1)/doubler path(F2)	0=F1 1=F2	
	5	IQ_CW	Switchover bit IQ/CW mode	0=IQ 1=CW	
	4	RefHiLo	Switchover bit for level control	0=LO 1=CW	
D4	11	-	Diagnosis multiplexer 2 Diagnostic points 2008 to 2015 Diagnosis multiplexer 1 Diagnostic points 2000 to 2007 Diagnosis multiplexer 0 to 7	0=OFF 1=ON	
	12	-			
	13	-			
	14	Diagena2			
	7	Diagenal			0=OFF 1=ON
	6	Dmux2			MSB LSB
	5	Dmux1			
	4	Dmux0			

7.4.7.4 Typical RF Levels

Conditional testing of the RF paths is possible only by connecting an RF probe to the spectrum analyzer. Make sure to have a short ground connection at low impedance. The series impedance of the probe should amount to 1 kOhm. The indicated values are typical values. The measurements are performed at lowest possible frequencies. The measurements are taken subsequent to the coupling capacitor of the indicated amplifier stage.

Frequency setting, mode	Test point	Typical RF level [dBm]
1501 MHz, CW	Doubler input, pin 1 N8 measure with 750.5 MHz	13
1501 MHz, CW	Output 1st amplifier doubler path, V149	7
1501 MHz, CW	Output 2nd amplifier doubler path, V148	-1
500 MHz, CW	Output 1st amplifier LO driver, V186	-11
500 MHz, CW	Output 2nd amplifier LO driver, V147	-5
500 MHz, CW	Output 3rd amplifier LO driver, V107	7
751 MHz, Vector modulation	Output 1st amplifier broadband amplifier, V100-V102	-5
751 MHz, Vector modulation	Output highpass filter following 2nd amplifier broadband amplifier (V109), C469	6
751 MHz, Vector modulation	Output 1st amplifier IQ filter1,	-4

Set frequency, mode	Test point	Typical RF level [dBm]
751 MHz, Vector modulation	Output 3rd amplifier IQ filter1, N21	-10
1801 MHz, Vector modulation	Output 1st amplifier IQ filter2, V91-V93	-5
1801 MHz, Vector modulation	Output 3rd amplifier IQ filter2, N20	-9
2501 MHz, Vector modulation	Output 1st amplifier IQ filter3, N12	-7
2501 MHz, Vector modulation	Output 3rd amplifier IQ filter3, N22	-12
500 MHz, CW	Input of output stage V108	-7

7.5 Removal and Assembly

After opening the instrument, unlocking the board and disconnecting the RF connections X221, X223 and X227, the module can be removed from its slot. The screening covers of the board are screwed in the conventional way.

7.6

External Interfaces

Pin	Name	Input/Output	Origin/Destination	Specified range	Signal description
Xfff.A12	SERBUS-CLK	Input	A3, FRO, X31.40	HCT level	Serbus clock
Xfff.A14	SERBUS-OUT	Output	A3, FRO, X31.39	HCT level	Serbus data
Xfff.A15	SERBUS-IN	Input	A3, FRO, X31.39	HCT level	Serbus data
Xfff.A16	SERBUS-SYNC	Input	A3, FRO, X31.37	HCT level	Serbus sync
X220.A17	SERBUS-INT	Output	A3, FRO, X31.38	HCT level	Serbus interrupt
X220.A18	Reset-P	Input	A3, FRO, X31.28	HCT level	Serbus reset
X220.A19	DIAG-5V	Output	A3, FRO, X31.44	-5 V to +5 V	Diagnosis
X220.A22	VA24-P	Input	A2, POWS1	23.75 to 25.25 V CW: 28 to 40 mA IQ: 30 to 42 mA	24-volt power supply
X220.A24	VA15-P	Input	A2, POWS1	14.85 to 15.75 V CW: 250 to 300 mA IQ: 360 to 420 mA	15-volt power supply
X220.A26	VA7.5-P	Input	A2, POWS1	7.45 to 7.95 V CW: 530 to 590 mA IQ: 530 to 590 mA	7.5-V power supply
X220.A28	VD5-P	Input	A2, POWS1	5.15 to 5.25 V CW: 450 to 500 mA IQ: 540 to 610 mA	5-V digital power supply
X220.A30	VA15-N	Input	A2, POWS1	-15.75 to -14.85 V CW: 120 to 160 mA IQ: 120 to 160 mA	-15-V power supply

Pin	Name	Input/Output	Origin/Destination	Specified range	Signal description
X221	FSUM	Input	A9, SUM A7, TSYN	7 to 12 dBm	450 to 1500 MHz Signal of frequency synthesis
X223	IQ300	Input	A240, IQMOD	-5 ± 0.2 dBm	Vector-modulated signal (bandwidth 30 MHz)
X227	FIQFIL	Output	A240, IQMOD	4 ± 3 dBm	Output signal 450 to 3300 MHz



ROHDE & SCHWARZ

**Schaltteillisten
numerisch geordnet**


**Part lists
in numerical order**

**Listes des pièces détachées
par numéros de référence**

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
	XX VARIANTENERKLAERUNG IDENTIFICATION OF MODELS VARO2=OHNE SMIQ-B46 EINBAU VARO4=GRUNDAUSFUEHRUNG				
C1 ..4	CE 33UF 20% 25V AL SMD SMD ELECTROLYTIC CAPACIT.	0009.5592.00	PANASONIC	EEV HB 1E 330P	
C5	CC 3,9PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT	
C6	CC 3,9PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT	
C7	CC 4,7PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C8	CC 3,9PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT	
C9	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C10	CC 12PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8256.00	MURATA	GRM39COG***F50ZPT	
C11	CC 12PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8256.00	MURATA	GRM39COG***F50ZPT	
C12	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C13	CC 5,6PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C14	CC 3,9PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4509.00	MURATA	GRM39COG***B50ZPT	
C15	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C16	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C17	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C18	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C19	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C20 ..23	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C24 ..27	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C28	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C29	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C30	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C31	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C32	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C33 ..35	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C36	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C37 ..39	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C40	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C41	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C42	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C43	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C44	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C45	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	1+

wir uns alle Rechte vor.

Comp. No.	Bezeichnung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
C46	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C47	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C48	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C49	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..51 C52	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C53	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..55 C56	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C57	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C58	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..61 C62	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C63	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C64	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C65	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C66	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..68 C69	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C70	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..72 C73	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C74	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C75	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C76	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C77	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C78	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C79	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..82 C83	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C84	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C85	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C86	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..88 C89	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C90	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C91	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	


1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	2+	

35.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C92	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C93	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C94	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C95	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C96	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C97	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C98	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C99	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C100	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C101	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C102	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..104					
C105	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C106	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..110					
C111	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C112	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C113	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C114	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C115	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..117					
C118	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C119	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C120	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C121	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C122	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..124					
C125	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C126	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C127	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C128	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..131					
C132	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C133	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..138					
C139	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C140	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..144					
C145	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	

095.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
 ROHDE & SCHWARZ		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	3+

wir uns alle Rechte vor.

Comp. No.	Bezeichnung Designation	Bestands- Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
C146	NICHT BESTUECKT NOT FITTED CC 0,2PF+-0,05PF 0603	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C147	SMD-CERAMIC CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C148	NICHT BESTUECKT NOT FITTED CC 0,5PF+-0,05PF 0603	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
C149	SMD-CERAMIC CAPACITOR CC 0,2PF+-0,05PF 0603	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C150	SMD-CERAMIC CAPACITOR CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C154	SMD CERAMIC CAPACITOR CC 4,7NF+-10% 50VHDK 0603	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C155	SMD-CERAMIC-CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C156	SMD-CERAMIC-CAPACITOR CC 470PF+-10%50V HDK 0603	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C157	SMD-CERAMIC-CAPACITOR CC 4,7NF+-10% 50VHDK 0603	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C158	SMD-CERAMIC-CAPACITOR CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C159	SMD CERAMIC CAPACITOR CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C160	SMD CERAMIC CAPACITOR CC 4,7NF+-10% 50VHDK 0603	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C161	SMD-CERAMIC-CAPACITOR CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C162	SMD CERAMIC CAPACITOR CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C163	SMD CERAMIC CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C164	SMD-CERAMIC-CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C165	SMD-CERAMIC-CAPACITOR CC 1,0NF+-10%50V HDK 0603	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C166	SMD-CERAMIC-CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C167	SMD-CERAMIC-CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C168	SMD-CERAMIC-CAPACITOR CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C169	SMD CERAMIC CAPACITOR CC 4,7NF+-10% 50VHDK 0603	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C170	SMD-CERAMIC-CAPACITOR CC 470PF+-10%50V HDK 0603	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C171	SMD-CERAMIC-CAPACITOR CC 4,7NF+-10% 50VHDK 0603	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C172	SMD-CERAMIC-CAPACITOR CC 470PF+-10%50V HDK 0603	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C173	SMD-CERAMIC-CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C174	SMD-CERAMIC-CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C175	SMD-CERAMIC-CAPACITOR CC 470PF+-10%50V HDK 0603	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C176	SMD-CERAMIC-CAPACITOR CC 470PF+-10%50V HDK 0603	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C177	SMD-CERAMIC-CAPACITOR CC 4,7NF+-10% 50VHDK 0603	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C178	SMD-CERAMIC-CAPACITOR CC 4,7NF+-10% 50VHDK 0603	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C179	SMD CERAMIC CAPACITOR CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C180	SMD CERAMIC CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C181	SMD-CERAMIC-CAPACITOR CC 4,7NF+-10% 50VHDK 0603	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C182	SMD-CERAMIC-CAPACITOR CC 470PF+-10%50V HDK 0603	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C183	SMD-CERAMIC-CAPACITOR CC 470PF+-10%50V HDK 0603	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
C184	SMD-CERAMIC-CAPACITOR CC 10NF+-10% 50VHDK 0603	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C185	SMD-CERAMIC-CAPACITOR CC 33NF+-10% 25V HDK 0603	CC 1051.4697.00	AVX	CM105X7R333K25VAT	


1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	4+	

15.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C186	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C187	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C188	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C189	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C190	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C191	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C192	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C193	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C194	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C195	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C196	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C197	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C198	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C199	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C200	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C201	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C202	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..204	SMD CERAMIC CAPACITOR				
C205	CC 2,2NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4767.00	MURATA	GRM39X7R***K5C500PT*	
..208	SMD-CERAMIC-CAPACITOR				
C209	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C210	CC 2,2NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4767.00	MURATA	GRM39X7R***K5C500PT*	
C211	CC 2,2NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4767.00	MURATA	GRM39X7R***K5C500PT*	
C212	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C213	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C214	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C215	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C216	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C217	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT/NOT FITTED	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C218	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C219	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C220	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C221	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C222	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C223	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	


Für diese Unterlage behalten
wir uns alle Rechte vor.

995.0026-0693

1GPK	887 3PLU	Ät	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHM & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	5+

wir uns alle Rechte vor.


Rechnung Comp. No.	Bestellungs Designation	Bestand Stock No.	Hersteller Manufacturer	Bezeichnung Designation	enthalten in
C224	NICHT BESTUECKT NOT FITTED CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C225	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C226	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C227	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C228	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NICHT BESTUECKT/NOT FITTED	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C229	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C232	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C233	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C234	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C235	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C236	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C237	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C238	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C239	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C240	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C241	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C242	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C243	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C244	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C245	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C246	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C247	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C248	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C249	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C253	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C254	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C255	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C256	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C257	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR	
C258	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C259	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C260	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	6+	

95.0026-0893

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C261	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C262	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C263	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C264	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C265	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C266	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C267	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C268	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C269	CC 8,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4550.00	MURATA	GRM39COG***B50ZPT	
C270	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
..272	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S	
C273	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S	
C274	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S	
C275	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C276	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C277	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C278	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C279	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C280	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C281	CC 22PF+-2% 150V PELL PORCELAIN CAPACITOR	0009.8604.00	ATC	ATC100A *** GW150XR	
C282	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C283	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C284	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C285	CC 22PF+-2% 150V PELL PORCELAIN CAPACITOR	0009.8604.00	ATC	ATC100A *** GW150XR	
C286	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C287	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C288	CC 27PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0010.9323.00	MURATA	GRM39COG***F50ZPT	
C289	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C290	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C291	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..293	CC 68PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.9746.00	MURATA	GRM39COG***F50ZPT	
C294	CC 68PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.9746.00	MURATA	GRM39COG***F50ZPT	
C295	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C296	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C297	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
..303	CC 27PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0010.9323.00	MURATA	GRM39COG***F50ZPT	
C304	CC 27PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0010.9323.00	MURATA	GRM39COG***F50ZPT	
C305	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..307					


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	Är	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHM & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	7+

095.0028-9893

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
C308	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C309	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C310	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C311	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
.319					
C320	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
.330					
C331	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C332	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C333	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C334	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C335	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C336	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C337	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C338	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C339	NICHT BESTUECKT/NOT FITTED CC 15PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8227.00	MURATA	GRM39COG***F50ZPT	
C340	CC 15PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8227.00	MURATA	GRM39COG***F50ZPT	
C341	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT	
C342	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
C343	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
C344	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT	
.346					
C347	CC 2,7PF+-0,1PF50VCOG0603 SMD-CERAMIC CAPACITOR	CC 0008.2119.00	AVX	0603 5J 2R7 BAWTR	
C348	CC 2,7PF+-0,1PF50VCOG0603 SMD-CERAMIC CAPACITOR	CC 0008.2119.00	AVX	0603 5J 2R7 BAWTR	
C349	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
.351					
C352	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C353	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C354	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C355	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C356	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
C357	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C358	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
C359	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
C360	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C361	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C362	CC 8,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4550.00	MURATA	GRM39COG***B50ZPT	
C363	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C364	CC 5,6PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C365	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C366	XX ENTHALTEN IN INCLUDED IN LAYOUT				


1GPK	887 3PLU	Äl	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	8+	

15.0026-0593

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C367	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C368	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C369	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C370	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C371	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C372	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C373	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C374	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C375	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C376	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C377	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C378	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C379	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C380	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C381	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C382	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C383	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C384	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C385	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C386	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C387	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C388	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C389	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C390	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C391	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C392	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C393	XX ENTHALTEN IN INCLUDED IN				

95.0028-0693

1GPK	887 3PLU	ÄI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	9+	

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
C394	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
C395	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C396	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C397	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C398	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C399	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C400	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C401	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C402	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C403	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C404	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C405	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C406	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C407	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C408	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C409	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C410	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C411	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C412	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C413	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C414	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C415	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C416	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C417	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C418	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C419	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C420	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39C0G***B50ZPT	
C421	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C422	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39C0G***B50ZPT	


1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	10+	

95.0028-0893

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C423	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C424 ..426	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C427	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C428	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C429	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C430	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C431	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C432	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C433	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C434 ..436	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C437	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C438	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C439 ..441	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C442	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C443	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C444	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C445 ..448	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C449 ..453	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C454	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C455	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C456	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C457 ..459	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C460	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C461	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C462	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C463	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C464	CC 8,2PF+-0,1PF 150V PELL PORCELAIN CAPACITOR	0009.8579.00	TEKELEC	201CHA***BVL R	
C465	CC 8,2PF+-0,1PF 150V PELL PORCELAIN CAPACITOR	0009.8579.00	TEKELEC	201CHA***BVL R	
C466	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C467 ..469	CC 5,6PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C470	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C471	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S	
C472	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C473	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C474	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR	


Für diese Unterlage behalten
wir uns alle Rechte vor.

095.0028-0693

1GPK	887 3PLU	Al	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	11+

wir uns alle Rechte vor.


Zeichnung Comp. No.	Bezeichnung Designation	Stock No.	Manufacturer	Designation	contained in
C475	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR	
C476 ..483	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT	
C484	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C485	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C486	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C487	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C488	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C489	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C490	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C491	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C492	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C493	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C494 ..497	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C498	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C499	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C500 ..507	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C508	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C509	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C510 ..512	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C513	CE 22UF+-20%35V RUND SMD SMD ELECTROLYTIC CAPACIT.	CE 0009.6253.00	PANASONIC	EEV HB 1V 220P	
C514	CE 33UF 20% 25V AL SMD SMD ELECTROLYTIC CAPACIT.	0009.5592.00	PANASONIC	EEV HB 1E 330P	
C515	CE 33UF 20% 25V AL SMD SMD ELECTROLYTIC CAPACIT.	0009.5592.00	PANASONIC	EEV HB 1E 330P	
C516	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C517	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C518 ..520	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C521 ..528	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C529	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C530 ..547	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C548	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C549 ..551	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C552	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C553	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	

1GPK	887 3PLU	Äl	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	12+	

95.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C554	CC 10P+-0, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C555	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C556	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C557	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C558	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C559	CC 68PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.9746.00	MURATA	GRM39COG***F50ZPT	
C560	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C561	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..563 C564	CC 6,8PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C565	CC 10P+-0, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C566	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C567	CC 6,8PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C568	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C569	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..572 C573	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C574	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT***(F	
C575	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0520.6873.00	AVX	2220 5C 105 KAT***(F	
C576	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0520.6873.00	AVX	2220 5C 105 KAT***(F	
C577	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0520.6873.00	AVX	2220 5C 105 KAT***(F	
C578	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0520.6873.00	AVX	2220 5C 105 KAT***(F	
C579	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0520.6873.00	AVX	2220 5C 105 KAT***(F	
C580	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C581	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C582	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C583	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C584	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C585	CC 4,7PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C586	CC 4,7PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C587	CC 6,8PFO, 1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C588	XX ENTHALTEN IN INCLUDED IN				


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	13+

95.0026-0693

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C589	LAYOUT CC 100PF+-1% 50VNP0 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C590	CC 12PF+-1% 50VNP0 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8256.00	MURATA	GRM39COG***F50ZPT	
C591	CC 100PF+-1% 50VNP0 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C592	CC 100PF+-1% 50VNP0 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C593	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C594	CC 100PF+-1% 50VNP0 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C595	CC 100PF+-1% 50VNP0 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C596	CC 100PF+-1% 50VNP0 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C597	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C598	CC 100PF+-1% 50VNP0 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
.601 C602	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C603	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C604	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*	
C605	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C606	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C607	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*	
C608	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C609	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C610	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*	
C611	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C612	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C613	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C614	CC 22PF+-2% 150V PELL PORCELAIN CAPACITOR	0009.8604.00	ATC	ATC100A *** GW150XR	
C615	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
C616	CC 2,7PF+-0,1PF50VCOG0603 SMD-CERAMIC CAPACITOR	CC 0008.2119.00	AVX	0603 5J 2R7 BAWTR	
C617	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C618	XX ENTHALTEN IN INCLUDED IN LAYOUT				
C619	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C620	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C621	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C622	CC 8,2PF+-0,1PF 150V PELL PORCELAIN CAPACITOR	0009.8579.00	TEKELEC	201CHA***BVL R	
C623	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C624	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR	
C625	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT	

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	14+	

95.0026-0893

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C626 ..632 C633	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C634 ..637 C638	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C639 ..642 C643	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C644	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C645	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C646	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C647	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C648	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT NOT FITTED	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C649	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C650	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C500PT*	
C651 ..660 C661	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR NICHT BESTUECKT/NOT FITTED	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C670	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C671	CE 10UF +-10% 25V 7343 TANTALUM SMD-CAPACITOR	CE 0007.7246.00	SPRAGUE	293D 106 X9 025 D2W	
D1	BL PC74HCT125T 4XBUFF. 3S QUAD LINE DRIVER	BL 0007.5395.00	PHILIPS_SE	(PC)74HCT125(D/T)	
D2	BL PC74HCT125T 4XBUFF. 3S QUAD LINE DRIVER	BL 0007.5395.00	PHILIPS_SE	(PC)74HCT125(D/T)	
D3	BS DG419DY 1XUM ANALOGSCH ANALOG SWITCH	0746.0322.00	SILICONIX	DG419DY	
D4 ..12 D13	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG. BL PC74HC4051T 8CH.AN.MUX 8CHANNEL ANAL.MULTIPLEXER	0804.0977.00	PHILIPS_SE	(PC)74HC4094(D/T)	
D14	BL PC74HC4051T 8CH.AN.MUX 8CHANNEL ANAL.MULTIPLEXER	0007.3592.00	PHILIPS_SE	(PC)74HC4051(D/T)	
D15	BL PC74HCT132T 4X2IN SCHM NAND SCHMITT TRIGGER	0007.3592.00	PHILIPS_SE	(PC)74HC4051(D/T)	
D17	BC X24164S8 2KX8 EEPROM IC MEMORY	BL 0007.6340.00	PHILIPS	(PC)74HCT132(D/T)	
D18	BG TH3032.1C SERBUSD ASIC IC GATE ARRAY	2013.8937.00	ATMEL	AT24C164-10SC-2.7	
L1	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	BG 0008.6143.00	THESYS	TH3032.1C	
L2	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)	
L3 ..6 L7	LD SP-DROSSEL 47UH 1,5A CHOKE LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)	
L8 ..18	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	1081.0331.00	SUMIDA	CDR125-470	
		LD 0009.6653.00	TOKO	LL1608-FH...K(J)	
		LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	15+

1995.0026-0693

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
L19	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)	
L20	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K) 100	
..23					
L24	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K) 100	
L25	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K) 100	
L26	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K) 100	
L27	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K) 100	
L28	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K) 100	
..34					
L35	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L36	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)	
L37	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	
L38	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)	
L39	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)	
L40	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	
L41	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L42	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	
L43	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)	
L44	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L45	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)	
L46	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L47	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L48	LD 6,8NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6676.00	TOKO	LL1608-FH...K(J)	
L49	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L50	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L51	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L52	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
..65					
L67	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L68	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L69	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L70	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L71	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L72	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L73	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L74	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L75	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L76	LD 18NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6724.00	TOKO	LL1608-FH...K(J)	
L77	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
..80					
L81	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L83	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	


1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	16+	

95.0026-0693

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
L84	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L85	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L86	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L87	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L88	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L89	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L90	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L91	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L92	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L93	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L94	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L95	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L96	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L97	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L98	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L99	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L100	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L101	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L102	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L103	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L104	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L105	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L106	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L107	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L108	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L109	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L110	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L111	XX ENTHALTEN IN INCLUDED IN				

0995.0026-0693

1GPK	887 3PLU	Ät	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	17+

wir uns alle Rechte vor.

Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
L112	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L113	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L115	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L116	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L117	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L118	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L119	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L120	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L121	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L122	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L123	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L124	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L125	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L126	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	
L127	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L128	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L129	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L130	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L131	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L132	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L133	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L134	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L135	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L136	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L137	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L138	XX ENTHALTEN IN INCLUDED IN LAYOUT				


1GPK	887 3PLU	Är	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	18+	

95.0028-0693

Für diese Unterlage behalten wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	Contained in
L139	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L140	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L141	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L142	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L143	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L144	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L145	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L146	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L147	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L148	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L149	LD 8,2NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6682.00	TOKO	LL1608-FH...K(J)	
L150	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L151	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L152	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L153	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L154	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L155	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L156	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L157	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L158	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L159	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L160	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L161	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L162	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L163	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L164	XX ENTHALTEN IN INCLUDED IN				


095.0026-0693

1GPK	887 3PLU	Äf	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	19+

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
L165	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L166	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L167	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L168	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L169	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L170	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L171	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L172	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L173	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L174	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L175	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L176	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L177	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L178	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L179	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L180	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L181	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L182	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L183	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L184	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L185	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L186	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L187	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L188	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L189	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L190	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				


95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	20+	

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	Contained in
L191	LAYOUT XX ENTHALTEN IN INCLUDED IN LAYOUT				
L192	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L193	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L194	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L195	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L196	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L197	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L198	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L199	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L200	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L201	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L202	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L203	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L204	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L205	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L206	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L207	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L208	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L209	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L210	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L211	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L212	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L213	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L214	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L215	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L216	XX ENTHALTEN IN INCLUDED IN LAYOUT				

195.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	21+

WIR UNS AUIS RECHTS VOR.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
L217	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L218	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L219	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L220	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L221	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L222	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L223	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L224	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L225	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L226	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L227	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L228	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L229	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L230	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L231	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L232	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L233	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L234	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L235	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L236	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L237	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L238	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L239	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L240	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L241	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L242	XX ENTHALTEN IN INCLUDED IN LAYOUT				


1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	22+	

3310020 0032

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
L243	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L244	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L245	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L246	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L247	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L248	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L249	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L250	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L252	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L253	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L254	LD 2,2NH+-0,3NH 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6618.00	TOKO	LL1608-FH2N2S	
L255	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L256	LD 4,7NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6653.00	TOKO	LL1608-FH...K(J)	
L257	LD 10NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6699.00	TOKO	LL1608-FH...K(J)	
L258	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L259	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L260	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L261	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L262	LD 12NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6701.00	TOKO	LL1608-FH...K(J)	
L263	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L266	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L267	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L269	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L270	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L271	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L273	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L274	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L275	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L276	XX ENTHALTEN IN INCLUDED IN LAYOUT				


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	23+

wir uns alle Rechte vor.


Comp. No.	Denominating Designation	Stock No.	Manufacturer	Designation	contained in
L277	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L278	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L279	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L280	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L283	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L284	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L285	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L286	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L287	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L288	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L289	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L290	XX ENTHALTEN IN INCLUDED IN LAYOUT				
L293	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L294	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L295	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L298	LD 3,9NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6647.00	TOKO	LL1608-FH...K(J)	
L299	LD 8,2NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6682.00	TOKO	LL1608-FH...K(J)	
L300	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
..309					
L310	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L311	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L312	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L313	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L314	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L315	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L316	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L319	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
..321					
N1	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)	
N2	BO REF01CS 10V 20MA VREF VOLTAGE REFERENCE	1002.5129.00	PMI	REF01C(S)	
N3	BO TLO72ACD 2XFET OPAMP OPERATIONAL AMPLIFIER	0803.1057.00	TEXAS	TL 072 ACDR	
N4	BO NE5532D 2XLN OPAMP	0007.7798.00	SIGNETICS	NE5532D	
..7	2 OPERATIONAL AMPLIFIER				
N8	BM SFD1001 VERDOPPLER FREQUENCY DOUBLER IC	1039.1804.00	WATKINS-JO	SFD1001	
N9	BO LM224D 4XLP OPAMP OPERATIONAL AMPLIFIER	0007.7852.00	SIGNETICS	LM224D	

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	24+	

15.0028-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
N10 ..17	BM CGY50 GAAS MMIC IC MMIC	1027.0037.00	SIEMENS	CGY50 (Q68000-A8370)	
N18	BO OP275GS LN 2XFET OPAMP LOW NOISE FET AUDIO OPAMP	2043.0928.00	ANALOG_DEV	OP275GS	
N19	BO OP275GS LN 2XFET OPAMP LOW NOISE FET AUDIO OPAMP	2043.0928.00	ANALOG_DEV	OP275GS	
N20 ..22	BM CGY50 GAAS MMIC IC MMIC	1027.0037.00	SIEMENS	CGY50 (Q68000-A8370)	
N23	BM SNA486 0,1-8G MMIC MICROWAVE MONOLITIC AMPL	1085.1961.00	STANFORD_M	SNA-486	
P3 ..16	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
R1	RG 33R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6918.00	DRALORIC	CR 0603	
R2	RG 13R0 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9069.00	DRALORIC	CR 0603	
R3	RG 12R1+-1%TK100 0603 SMD RESISTOR EIA0603	0010.9275.00	PHILIPS_CD	RC 22 H	
R4	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CD	RC 22 H	
R5	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R6	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R7	RG 12R1+-1%TK100 0603 SMD RESISTOR EIA0603	0010.9275.00	PHILIPS_CD	RC 22 H	
R8	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CD	RC 22 H	
R9	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CD	RC 22 H	
R10	RG 220R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6953.00	DRALORIC	CR 0603	
R11	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R12	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CD	RC 22 H	
R13	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R14	RG 220R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6953.00	DRALORIC	CR 0603	
R15	RG 220R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6953.00	DRALORIC	CR 0603	
R16	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R17	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R18	RG 121 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9498.00	DRALORIC	CR 0603	
R19 ..22	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R23	RG 243R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9800.00	DRALORIC	CR 0603	
R24	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R25	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CD	RC 22 H	
R26	RG 243R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9800.00	DRALORIC	CR 0603	
R27	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CD	RC 22 H	
R28	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CD	RC 22 H	
R29	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6960.00	DRALORIC	CR 0603	
R30	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6960.00	DRALORIC	CR 0603	
R31	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R32	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R33	RG 68R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6930.00	DRALORIC	CR 0603	
R34	RG 68R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6930.00	DRALORIC	CR 0603	
R35	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CD	RC 22 H	

Für diese Unterlage behalten wir uns alle Rechte vor.


1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	25+

95.0026-0993

wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R36	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R37	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R38	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R39	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R40	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R41	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R42	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R43	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R44	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R45	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R46	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
..49	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R50	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R51	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R52	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R53	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R54	RG 68R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6930.00	DRALORIC CR 0603	
R55	RG 68R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6930.00	DRALORIC CR 0603	
R56	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R57	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R58	RG 82,5 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9052.00	DRALORIC CR 0603	
R59	RG 121 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9498.00	DRALORIC CR 0603	
R60	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
..67	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R68	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R69	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R70	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R71	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R72	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R73	RG 2,64KOH+-0,1%TK25 RESISTOR	1206	0010.1980.00	PHILIPS_CO MPC 01	
..77	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R78	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R79	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R80	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R81	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R82	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R83	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R84	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R85	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R86	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603	0010.9275.00	PHILIPS_CO RC 22 H	
R87	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603	0010.9275.00	PHILIPS_CO RC 22 H	
R88	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	

35.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	26+	

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R89	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R90	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H	
R91	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7066.00	PHILIPS_CO RC 22 H	
R92	RG 18R2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8385.00	DRALORIC CR 0603	
R93	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R95	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603	0010.9275.00	PHILIPS_CO RC 22 H	
R96	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R97	RG 13R0 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9069.00	DRALORIC CR 0603	
R98	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R99	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R100	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R101	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R102	RG 82,5 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9052.00	DRALORIC CR 0603	
R103	RG 332 OHM+-1%TK100 RESISTOR CHIP	1206	RG 0007.5650.00	DRALORIC CR 1206	
R104	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R106	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R107	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R108	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
.. 118	SMD RESISTOR EIA0603				
R119	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R120	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R121	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R122	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R123	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R124	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R125	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R126	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R127	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R128	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R129	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
.. 134	SMD RESISTOR EIA0603				
R135	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R136	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
.. 140	SMD RESISTOR EIA0603				
R141	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R142	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R143	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R144	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
.. 152	SMD RESISTOR EIA0603				
R153	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R154	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R155	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R156	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	ÄI	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	27+	

95.0026-0693

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	continued in
R157 ..163	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R164	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R165 ..168	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R169	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R170	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R171	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R172	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R173	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R174	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R175 ..179	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R180	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R181	RG 8K25 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8456.00	PHILIPS_CO RC 22 H	
R182	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R183	RG 8K25 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8456.00	PHILIPS_CO RC 22 H	
R184	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R185	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R186	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R187	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R188	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R189	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603	
R191	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R192	NICHT BESTUECKT NOT FITTED RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R193 ..195	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R196	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R197	NICHT BESTUECKT NOT FITTED RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R198	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R199	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R200	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R201	NICHT BESTUECKT NOT FITTED RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R202	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R203	NICHT BESTUECKT NOT FITTED RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R204	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	


1GPK	887 3PLU	Äi	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	28+	

35.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R205	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R206	RG 10K +-1% TK100 SMD RESISTOR EIA0603 NICHT BESTUECKT NOT FITTED	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R207	RG 10K +-1% TK100 SMD RESISTOR EIA0603 NICHT BESTUECKT NOT FITTED	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R208	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
. .217					
R218	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R219	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
. .223					
R224	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R225	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R226	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R227	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603	
R228	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R229	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R230	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R231	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R233	RG 301 OHM+-1%TK100 RESISTOR CHIP	1206	RG 0007.5643.00	PHILIPS_CD RC02	
R234	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R235	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R236	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R237	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R238	RG 30K1+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9281.00	PHILIPS_CD RC 22 H	
R239	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R240	RG 30K1+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9281.00	PHILIPS_CD RC 22 H	
R241	RG 30K1+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9281.00	PHILIPS_CD RC 22 H	
R242	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R243	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
. .247					
R248	RG 8K25 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8456.00	PHILIPS_CD RC 22 H	
R249	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
. .252					
R253	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R254	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R255	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
. .262					
R263	RG 1K21 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0010.9817.00	PHILIPS_CD RC 22 H	
R264	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R265	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R266	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
. .269					
R270	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R271	RG 82,5 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9052.00	DRALORIC CR 0603	
R272	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CD RC 22 H	

Für diese Unterlage behalten
wir uns alle Rechte vor.


95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
 ROHDE & SCHWARZ		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	29+

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
R273	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R274	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R275	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R276	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
.281	SMD RESISTOR EIA0603				
R282	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R283	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R284	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R285	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
.300	SMD RESISTOR EIA0603				
R301	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8410.00	PHILIPS_CO RC 22 H	
.304	SMD RESISTOR EIA0603				
R305	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R306	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R307	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8410.00	PHILIPS_CO RC 22 H	
R308	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R309	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R310	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
.313	SMD RESISTOR EIA0603				
R314	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R315	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
.317	SMD RESISTOR EIA0603				
R318	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R319	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R320	RG 301R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9123.00	PHILIPS_CO RC 22 H	
R321	RG 301R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9123.00	PHILIPS_CO RC 22 H	
R322	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R323	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R324	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R325	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R326	RG 16,2OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.8933.00	DRALORIC CR 0603	
R327	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H	
R328	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R329	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R330	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R331	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R332	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R333	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R334	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R335	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R336	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R337	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R338	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R339	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	


6.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	30+

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R340	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R341	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R342	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R343	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R344	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R345	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R346	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
..353	SMD RESISTOR EIA0603				
R354	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R355	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R356	RG 8K25 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8456.00	PHILIPS_CO RC 22 H	
R357	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8433.00	DRALORIC CR 0603	
R358	RG 8K25 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8456.00	PHILIPS_CO RC 22 H	
R359	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8433.00	DRALORIC CR 0603	
R360	RG 12K1 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8462.00	DRALORIC CR 0603	
R361	RG 12K1 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8462.00	DRALORIC CR 0603	
R362	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R363	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R364	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R365	RG 8K25 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8456.00	PHILIPS_CO RC 22 H	
R366	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R367	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H	
..370	SMD RESISTOR EIA0603				
R371	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R372	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H	
R373	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H	
R374	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R375	RG 6K8 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7037.00	DRALORIC CR 0603	
R376	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R377	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
..380	SMD RESISTOR EIA0603				
R381	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603	
..383	SMD RESISTOR EIA0603				
R384	RG 301R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9123.00	PHILIPS_CO RC 22 H	
R385	RG 243R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9800.00	DRALORIC CR 0603	
R386	RG 110 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9481.00	DRALORIC CR 0603	
R387	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
..389	SMD RESISTOR EIA0603				
R390	RG 8R25 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9117.00	DRALORIC CR 0603	
R391	RG 13R0 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9069.00	DRALORIC CR 0603	
R392	RG 13R0 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9069.00	DRALORIC CR 0603	
R393	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
..395	SMD RESISTOR EIA0603				
R396	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R397	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
..402	SMD RESISTOR EIA0603				


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHM & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	31+

wir uns alla Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R403 .406	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7072.00 PHILIPS_CO RC 22 H	
R407	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7008.00 PHILIPS_CO RC 22 H	
R408 .411	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7072.00 PHILIPS_CO RC 22 H	
R412	RG 47K +-1% TK100 SMD RESISTOR EIA0603 NICHT BESTUECKT/NOT FITTED	0603		0009.7072.00 PHILIPS_CO RC 22 H	
R413	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6901.00 DRALORIC CR 0603	
R414	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6901.00 DRALORIC CR 0603	
R415	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6901.00 DRALORIC CR 0603	
R416	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7008.00 PHILIPS_CO RC 22 H	
R417	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7008.00 PHILIPS_CO RC 22 H	
R418	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8410.00 PHILIPS_CO RC 22 H	
R419	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R420	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R421 .425	RG 2,13KOH+-0,1%TK25 SMD-RESISTOR EIA1206	1206		0009.8140.00 PHILIPS_CO MPC 01	
R426	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R427	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8427.00 PHILIPS_CO RC 22 H	
R428	RG 18R2 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8385.00 DRALORIC CR 0603	
R429	RG 18R2 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8385.00 DRALORIC CR 0603	
R430	RG 82,5 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9052.00 DRALORIC CR 0603	
R431	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9030.00 DRALORIC CR 0603	
R432	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6924.00 PHILIPS_CO RC 22 H	
R433 .446	RG 39R2 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9400.00 DRALORIC CR 0603	
R447	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9030.00 DRALORIC CR 0603	
R448 .456	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6924.00 PHILIPS_CO RC 22 H	
R457	RG 150K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7095.00 PHILIPS_CO RC 22 H	
R458	RG 150K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7095.00 PHILIPS_CO RC 22 H	
R459 .461	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R462	RG 3R32 +-1% TK250 SMD RESISTOR EIA0603	0603		0010.8362.00 PHILIPS_CO RC 22 H	
R463	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R464	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603		0009.9100.00 DRALORIC CR 0603	
R465	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R466	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R467 .470	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603		0009.9100.00 DRALORIC CR 0603	
R471	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R472 .474	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603		0009.9100.00 DRALORIC CR 0603	
R475	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R476	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R477	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6901.00 DRALORIC CR 0603	
R478	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6901.00 DRALORIC CR 0603	


1GPK	887 3PLU	ÄI	Datum Date	Schalttafeliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	32+

95-0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R479 . .484	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CD	RC 22 H	
R485	RG 680R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6982.00	PHILIPS_CD	RC 22 H	
R486	RG 680R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6982.00	PHILIPS_CD	RC 22 H	
R487	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CD	RC 22 H	
R488	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CD	RC 22 H	
R489	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R490	RG 82,5 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9052.00	DRALORIC	CR 0603	
R491	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R492	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R494	RS 0,25W200KOHM+-20% SMD POTENTIOMETER	RS 0007.9684.00	BI_TECHNOL	23 B R... TR	
R495	RS 0,25W200KOHM+-20% SMD POTENTIOMETER	RS 0007.9684.00	BI_TECHNOL	23 B R... TR	
R496	RS 0,25W10KOHM +-20% SMD POTENTIOMETER	RS 0007.9649.00	BI_TECHNOL	23 B R... TR	
R497	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CD	RC 22 H	
R498	RG 220R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6953.00	DRALORIC	CR 0603	
R499	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CD	RC 22 H	
R500	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R501 . .506	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CD	RC 22 H	
R507	RG 1K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6999.00	DRALORIC	CR 0603	
R508	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603	
R509	RG 1K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6999.00	DRALORIC	CR 0603	
R510	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CD	RC 22 H	
R511	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603	
R512	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603	
R513 . .518	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CD	RC 22 H	
R519	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603	
R520	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CD	RC 22 H	
R521	RG 3K3 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7014.00	DRALORIC	CR 0603	
R522	RG 3K3 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7014.00	DRALORIC	CR 0603	
R523	RG 1K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6999.00	DRALORIC	CR 0603	
R524	RG 680R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6982.00	PHILIPS_CD	RC 22 H	
R525	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603	
R526	RG 3K3 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7014.00	DRALORIC	CR 0603	
R527	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CD	RC 22 H	
R528	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603	
R529	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603	
R530	RK SMD-HEISSL.100K 1206 SMD-NTC-RESISTOR	0008.9236.00	SIEMENS	B57621-C104-J	
R531	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CD	RC 22 H	
R532	RK SMD-HEISSL.100K 1206 SMD-NTC-RESISTOR	0008.9236.00	SIEMENS	B57621-C104-J	
R533 . .535	RG 15R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6899.00	DRALORIC	CR 0603	

Für diese Unterlage behalten wir uns alle Rechte vor.


95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	33+

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
R536	RG 392R+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9300.00	PHILIPS_CO	RC 22 H	
R537	RG 392R+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9300.00	PHILIPS_CO	RC 22 H	
R538	RG 12,0KOH+-0,1%TK25 1206 SMD-RESISTOR	0009.7620.00	PHILIPS_CO	MPC 01	
R539	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603	
R540	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R541	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R542	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603	
R543	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603	
R544	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603 NICHT BESTUECKT NOT FITTED	0010.9100.00	PHILIPS_CO	RC 22 H	
R545 ..548	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R549	RK SMD-HEISSL.100K 1206 SMD-NTC-RESISTOR	0008.9236.00	SIEMENS	B57621-C104-J	
R550	RG 18K2+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9317.00	DRALORIC	CR 0603	
R551 ..553	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R554 ..558	RG 22K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7050.00	DRALORIC	CR 0603	
R559	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R560	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R561 ..564	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R565	RK SMD-HEISSL.100K 1206 SMD-NTC-RESISTOR	0008.9236.00	SIEMENS	B57621-C104-J	
R566	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R567	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC	CR 0603	
R568	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC	CR 0603	
R569	RG 150K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7095.00	PHILIPS_CO	RC 22 H	
R570	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R571	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R574	RG 1K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6999.00	DRALORIC	CR 0603	
R575	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R576	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R577 ..581	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
R582	RG 3K92 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8427.00	PHILIPS_CO	RC 22 H	
R583	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6960.00	DRALORIC	CR 0603	
R584	RG 47K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7072.00	PHILIPS_CO	RC 22 H	
R585	RG 392R+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9300.00	PHILIPS_CO	RC 22 H	
R586	RG 392R+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9300.00	PHILIPS_CO	RC 22 H	
R587	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6960.00	DRALORIC	CR 0603	
R588	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6960.00	DRALORIC	CR 0603	
R589 ..593	RG 332 OHM+-1%TK100 1206 RESISTOR CHIP	RG 0007.5650.00	DRALORIC	CR 1206	
R594 ..598	RG 301 OHM+-1%TK100 1206 RESISTOR CHIP	RG 0007.5643.00	PHILIPS_CO	RC02	
R599	RG 20,0KOH+-0,1%TK25 1206 SMD-RESISTOR	0009.7643.00	PHILIPS_CO	MPC 01	


15.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	34+	

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R600	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7066.00	PHILIPS_CO RC 22 H	
R601	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R602	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R603	RG 100K +-1% TK100	0603	RG 0009.5363.00	DRALORIC CR 0603	
. . 606	SMD RESISTOR EIA0603				
R607	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R608	NICHT BESTUECKT/NOT FITTED RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R609	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R610	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R611	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7050.00	DRALORIC CR 0603	
R612	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R613	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7066.00	PHILIPS_CO RC 22 H	
R614	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R615	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R616	RG 18K2+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9317.00	DRALORIC CR 0603	
R617	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R618	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R619	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R620	RG 10K +-1% TK100	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
. . 624	SMD RESISTOR EIA0603				
R625	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R626	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H	
R627	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R628	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R629	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R630	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H	
R631	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R632	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R633	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R634	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H	
R635	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R636	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R637	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H	
R638	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R639	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R640	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H	
R641	RG 10K +-1% TK100	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
. . 644	SMD RESISTOR EIA0603				
R645	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R646	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R647	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	

Für diese Unterlage behalten wir uns alle Rechte vor.


95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	35+

wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R648	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00 PHILIPS_CO RC 22 H	
R649	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
..651	R652	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00 PHILIPS_CO RC 22 H	
R653	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8440.00 PHILIPS_CO RC 22 H	
R654	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8410.00 PHILIPS_CO RC 22 H	
R655	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8410.00 PHILIPS_CO RC 22 H	
R656	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8427.00 PHILIPS_CO RC 22 H	
R657	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R658	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R659	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206		0008.9236.00 SIEMENS B57621-C104-J	
..661	R662	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H
R663	RG 22K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7050.00 DRALORIC CR 0603	
R664	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R665	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8410.00 PHILIPS_CO RC 22 H	
R666	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00 PHILIPS_CO RC 22 H	
R667	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00 PHILIPS_CO RC 22 H	
..674	R675	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H
R677	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206		0008.9236.00 SIEMENS B57621-C104-J	
R678	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R679	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R680	RG 12K1 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8462.00 DRALORIC CR 0603	
R681	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6953.00 DRALORIC CR 0603	
R682	RG 18K2+-1% TK100 SMD RESISTOR EIA0603	0603		0010.9317.00 DRALORIC CR 0603	
R683	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R684	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8433.00 DRALORIC CR 0603	
R685	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8433.00 DRALORIC CR 0603	
R686	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00 PHILIPS_CO RC 22 H	
R687	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8433.00 DRALORIC CR 0603	
R688	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R689	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R690	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8433.00 DRALORIC CR 0603	
R691	RS 0.25W200KOHM+-20% POTENTIOMETER	SMD	RS	0007.9684.00 BI_TECHNOL 23 B R... TR	
..694	R695	RG 560R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9630.00 DRALORIC CR 0603	
R696	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8391.00 PHILIPS_CO RC 22 H	
R697	RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206		0009.7666.00 PHILIPS_CO MPC 01	
..705	R706	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00 PHILIPS_CO RC 22 H	
R707	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9081.00 PHILIPS_CO RC 22 H	
R708	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9000.00 PHILIPS_CO RC 22 H	
R709	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9000.00 PHILIPS_CO RC 22 H	


05.0026-0693

1GPK	887 3PLU	Är	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	36+

Für diese Unterlage behalten
Wir uns alle Rechte vor.


Comp. No.	Designation	Stack No.	Manufacturer	Designation	Content in
R710	RG 30,1 OHM+-1%TK100 0603	0009.9081.00	PHILIPS_CO	RC 22 H	
.716	SMD RESISTOR EIA0603				
R717	RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R718	RG 18K2+-1% TK100 0603	0010.9317.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R719	RG 15K +-1% TK100 0603	0009.7043.00	DRALORIC	CR 0603	
.725	SMD RESISTOR EIA0603				
R726	RG 18K2+-1% TK100 0603	0010.9317.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R727	RG 20K +-1% TK100 0603	0010.9100.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R728	RG 20K +-1% TK100 0603	0010.9100.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R729	RG 220R +-1% TK100 0603	0009.6953.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R730	RG 18K2+-1% TK100 0603	0010.9317.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R731	RG 3K3 +-1% TK100 0603	0009.7014.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R732	RG 15K +-1% TK100 0603	0009.7043.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R733	RG 82,5 OHM+-1%TK100 0603	0009.9052.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R734	RG 82,5 OHM+-1%TK100 0603	0009.9052.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R735	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R736	RG 56R +-1% TK100 0603	0009.9646.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R737	RG 47R +-1% TK100 0603	0009.6924.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R738	RG 56R +-1% TK100 0603	0009.9646.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R739	RG 1K5 +-1% TK100 0603	0009.6999.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R740	RG 18K2+-1% TK100 0603	0010.9317.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R741	RG 30K1+-1% TK100 0603	0010.9281.00	PHILIPS_CO	RC 22 H	
.746	SMD RESISTOR EIA0603				
R747	RG 33K +-1% TK100 0603	0009.7066.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R748	RG 82,5 OHM+-1%TK100 0603	0009.9052.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R749	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R750	RG 100R 1% 1W 1218	1104.2740.00	PHILIPS_CO	PRC201-100R 1% TK100	
	SMD RESISTOR				
R751	RG 100R 1% 1W 1218	1104.2740.00	PHILIPS_CO	PRC201-100R 1% TK100	
	SMD RESISTOR				
R752	RG 39R2 +-1% TK100 0603	0010.9400.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R753	RG 39R2 +-1% TK100 0603	0010.9400.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R754	RG 35,7 OHM+-1%TK100 0603	0009.9000.00	PHILIPS_CO	RC 22 H	
.756	SMD RESISTOR EIA0603				
R757	RG 82K5 +-1% TK100 0603	0010.9123.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R758	RG 0-OHM WIDERSTAND 0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
	SMD RESISTOR EIA0603				
R759	RG 0-OHM WIDERSTAND 0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
	SMD RESISTOR EIA0603				
	NICHT BESTUECKT				
	NOT FITTED				
R760	RG 0-OHM WIDERSTAND 0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
	SMD RESISTOR EIA0603				
	NICHT BESTUECKT				
	NOT FITTED				
R761	RG 0-OHM WIDERSTAND 0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
	SMD RESISTOR EIA0603				
	NICHT BESTUECKT				
	NOT FITTED				
R762	RG 30,1 OHM+-1%TK100 0603	0009.9081.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R763	RG 8R25 +-1% TK250 0603	0009.9117.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				

95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaffteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	37+

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation
R764	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603	0010.9275.00	PHILIPS_CO RC 22 H
R765	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H
R766	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H
R767	RG 162 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9500.00	PHILIPS_CO RC 22 H
R768	RG 162 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9500.00	PHILIPS_CO RC 22 H
R769	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9300.00	PHILIPS_CO RC 22 H
R770	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9300.00	PHILIPS_CO RC 22 H
R771	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603
R772	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603
R773	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603
R774	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603
R775	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603
R776	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H
R777	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8410.00	PHILIPS_CO RC 22 H
R778	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R779	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R780	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R781	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R782	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H
R783	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R784	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H
R785	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R792	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603
R793	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603
R794	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R795	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H
R796	RG 39R2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9400.00	DRALORIC CR 0603
R801	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603
R802	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603
R803	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603
R804	RG 12R1+-1%TK100 SMD RESISTOR EIA0603	0603	0010.9275.00	PHILIPS_CO RC 22 H
R805	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603
R806	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R808	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H
R809	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H
R810	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H
R811	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R812	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R813	RG 7K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8440.00	PHILIPS_CO RC 22 H
R814	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R815	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H
R816	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H


1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	38+

15.0026-0693

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	Contents in
R817	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R818	RG 7K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8440.00	PHILIPS_CO	RC 22 H	
R819	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R820	RG 4K7 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7020.00	PHILIPS_CO	RC 22 H	
R821	RG 15K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7043.00	DRALORIC	CR 0603	
..823	R824	RG 68R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6930.00	DRALORIC	CR 0603
R825	RG 47K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7072.00	PHILIPS_CO	RC 22 H	
R826	RG 47K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7072.00	PHILIPS_CO	RC 22 H	
R827	RG 150K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7095.00	PHILIPS_CO	RC 22 H	
R828	RG 150K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7095.00	PHILIPS_CO	RC 22 H	
R829	RG 8K25 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8456.00	PHILIPS_CO	RC 22 H	
R830	RG 8K25 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8456.00	PHILIPS_CO	RC 22 H	
R831	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R832	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R833	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603	
R834	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603	
R835	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R836	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603	
R837	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
..839	R840	RG 1K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6999.00	DRALORIC	CR 0603
U1	BJ DAC08CS 1X8-DAC	6024.3137.00	PMI	DAC08C(S)	
..6	D/A-CONVERTER				
U7	BO LM2903D 2XLP COMPAR DUAL	0520.7734.00	SIGNETICS	LM2903(D)	
U8	BM SM4T17-2 MIXER 3,4GHZ MIXER	1085.1503.00	WATKINS-JO	WJ-SM4T17-2	
V1	AE BZV55/C4V7 0.5W ZDI ZENER DIODE	AE 0006.9822.00	PHILIPS	BZV55B4V7	
V2	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
..18	V19	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101
V20	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V21	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V22	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101	
V23	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
..31	V32	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101
..55	V56	AE BZV55/C5V6 0.5W ZDI ZENER DIODE	AE 0006.9845.00	PHILIPS	BZV55B5V6
V57	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
..63	V64	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)
..79	V80	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B
V81	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V82	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V83	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	

95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	39+

Für diese Unterlage behalten wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
V84 ..90	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V91 ..96	AM CFY30 P-E 5V GAASF O.1-12GHZ GAAS FET	1068.9622.00	SIEMENS	CFY30 (-F97)	
V97	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V98	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V99	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V100 ..102	AM CFY30 P-E 5V GAASF O.1-12GHZ GAAS FET	1068.9622.00	SIEMENS	CFY30 (-F97)	
V103	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V104	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V105	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V106	AM SHF0186K 9V GAASF O.5-4GHZ GAAS FET	1085.1655.00	STANFORD_M	SHF-0186K4230TR	
V107	AM SHF0186K 9V GAASF O.5-4GHZ GAAS FET	1085.1655.00	STANFORD_M	SHF-0186K4230TR	
V108	AM SHF 186 SELECTED IP3 TRANSISTOR GAASFET	1085.2239.00			
V109	AM SHF0186K 9V GAASF O.5-4GHZ GAAS FET	1085.1655.00	STANFORD_M	SHF-0186K4230TR	
V110 ..113	AE BZV55/C4V7 0.5W ZDI ZENER DIODE	AE 0006.9822.00	PHILIPS	BZV55B4V7	
V114	AM BSS123 N-E 100V MOSF FET	0815.7961.00	SIEMENS	BSS 123 (-S512)	
V115	AM BSS123 N-E 100V MOSF FET	0815.7961.00	SIEMENS	BSS 123 (-S512)	
V116 ..118	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V119	AE BZV55/C5V6 0.5W ZDI ZENER DIODE	AE 0006.9845.00	PHILIPS	BZV55B5V6	
V120	AE BZV55/C5V6 0.5W ZDI ZENER DIODE	AE 0006.9845.00	PHILIPS	BZV55B5V6	
V121 ..123	AE BAR64 1X PIN SILICON PIN DIODE	1039.3059.00	SIEMENS	BAR64 (Q62702A1041)	
V124	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V125	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V126	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V127 ..130	NICHT BESTUECKT/NOT FITTED AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V131 ..144	AE HSMS2800 SCHOTTKY SCHOTTKY DIODE	AE 0836.8421.00	HEWLETT_PA	HSMS-2800(#L31)	
V145	AE BAR64 1X PIN SILICON PIN DIODE	1039.3059.00	SIEMENS	BAR64 (Q62702A1041)	
V146	AE HSMS2800 SCHOTTKY SCHOTTKY DIODE	AE 0836.8421.00	HEWLETT_PA	HSMS-2800(#L31)	
V147 ..150	AK BFP450 NPN 4,5V 100MA RF-TRANSISTOR NPN	4048.1483.00	SIEMENS	BFP450 (-F1590)	
V151	AK BCP68-16 N 20V TRANS MEDIUM POWER TRANSISTOR	0008.2019.00	PHILIPS	BCP68-25	
V152	AK BCP68-16 N 20V TRANS MEDIUM POWER TRANSISTOR	0008.2019.00	PHILIPS	BCP68-25	
V153 ..185	AE BB833 9,3/0,75PF CDI VARACTOR	1051.4751.00	SIEMENS	BB833 (-B628)	
V186	AK BFP450 NPN 4,5V 100MA RF-TRANSISTOR NPN	4048.1483.00	SIEMENS	BFP450 (-F1590)	
V187 ..192	AE BB535 18,7/2,1P CDI TUNING DIODE	1039.3107.00	SIEMENS	BB535/Q62702-B580	
V193	AM SI9410DY N-E 30V MOSF MOSFET	1081.0354.00	SILICONIX	SI9410DY	
V194 ..197	NICHT BESTUECKT/NOT FITTED AM SI9410DY N-E 30V MOSF MOSFET	1081.0354.00	SILICONIX	SI9410DY	
V198 ..201	AE BB639 2.9/36.OP CDI TUNING DIODE	4032.4265.00	SIEMENS	BB639(-B586)	
V202	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V205	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	


1GPK	887 3PLU	ÄI	Datum Date	Schaltteilleiste für Parts list for	Sechnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	40+

3.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	Continued in
V206 ..208	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V209 ..211	AE HSMS2800 SCHOTTKY SCHOTTKY DIODE	AE 0836.8421.00	HEWLETT_PA	HSMS-2800(#L31)	
V212 ..217	AE BB833 9,3/0,75PF CDI VARACTOR	1051.4751.00	SIEMENS	BB833 (-B628)	
V218	AE BB535 18,7/2,1P CDI TUNING DIODE	1039.3107.00	SIEMENS	BB535/Q62702-B580	
W22	DW HF-KABEL W2	1084.9398.00			
X1 ..7	FJ EINLOETBUCHSE MMCX SMD CONNECTOR	1075.4045.00	SUHNER	82MMCX-S50-0-51/1110	
X220	FP STECKERLEISTE 32POL. CONNECTOR 32P.	FP 0008.5718.00	DEUT_ELCO	16 8457 064 002 027	
X221	FJ EINLOETBUCHSE SMA CONNECTOR	1085.1726.00	SUHNER	82SMA-S-50-0-45/111N	
X223	FJ EINLOETBUCHSE MMCX CONNECTOR	1085.1532.00	SUHNER	82MMCXS50-0-2/111KG	
X227	FJ EINLOETBUCHSE SMA CONNECTOR	1085.1726.00	SUHNER	82SMA-S-50-0-45/111N	
X22A	FJ EINLOETBUCHSE MMCX SMD CONNECTOR	1085.2045.00	SUHNER	82 MMCX-50-0-8/111	
X22B	FJ EINLOETBUCHSE MMCX SMD CONNECTOR	1085.2045.00	SUHNER	82 MMCX-50-0-8/111	
Z1 ..9	LD T-FILTER 3,3NF SMD SMD-FILTER	1039.1362.00	MURATA	NFM61R20T332T1	
Z10 ..15	LD T-FILTER 100PF SMD SMD-FILTER	1039.1356.00	MURATA	NFM61ROOT101T1	
Z16 ..18	LD PI-FILTER 2X1NF SMD SMD-CERAMIC-PI-FILTER	4024.7152.00	TUSONIX	4700-003	

95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		24	07.10.99	EE IQ-CONVERTER IQ-CONVERTER	1084.9300.01 SA	41-

XY-Liste

XY List

Erklärung der Spaltenbezeichnungen:

el. Kennz.	Bauelement-Kennzeichen
Seite	Leiterplatten-Seite, auf der sich das Bauelement befindet
X/Y	Koordinaten (in Millimeter) des Bauelementes auf der Leiterplatte bezogen auf den Nullpunkt
Planq., Bl.	Planquadrat und Seite des Schaltbildes für das jeweilige Bauelement

Explanation of column designations:

Part	Identification of instrument part
Side	Side of the PC board on which instrument part is positioned
X/Y	Coordinates (in units of millimeters) of the component on the PC board in reference to zero point
Sqr, Pg	Square and page of the diagram for the respective instrument part

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz.	Seite	X	Y	Planq.	Bl.	el. Kennz.	Seite	X	Y	Planq.	Bl.	el. Kennz.	Seite	X	Y	Planq.	Bl.
Part	Side			Sqr	Pg	Part	Side			Sqr	Pg	Part	Side			Sqr	Pg
C1	B	107	51	4C	16	C75	B	192	62	6C	11	C149	B	85	110	2D	6
C2	B	112	51	4D	16	C76	B	200	82	7A	11	C150	A	30	94	8F	2
C3	B	128	41	4D	16	C77	B	202	79	7A	11	C151	A	48	95	8E	2
C4	B	123	41	4E	16	C78	B	174	61	5D	11	C152	A	33	101	9D	2
C5	B	293	89	7B	8	C79	B	264	77	7B	12	C153	A	30	90	7E	2
C6	B	293	82	8B	8	C80	B	265	82	7A	12	C154	A	36	87	7D	2
C7	B	106	135	7C	6	C81	B	239	79	5C	12	C155	A	19	107	3E	5
C8	B	109	131	7C	6	C82	B	241	76	5C	12	C156	A	35	117	6E	5
C9	B	292	105	6B	8	C83	B	252	80	6C	12	C157	A	34	122	6F	5
C10	B	78	24	5C	3	C84	B	252	76	6B	12	C158	B	53	129	10C	5
C11	B	45	48	3C	4	C85	B	155	85	4C	11	C159	A	57	114	10D	5
C12	B	235	129	7B	7	C86	B	163	66	3A	11	C160	A	52	131	8D	5
C13	B	293	93	7B	8	C87	B	163	71	3A	11	C161	A	58	132	8E	5
C14	B	106	139	6C	6	C88	B	164	85	4C	11	C162	A	24	131	4F	5
C15	B	19	50	4D	2	C89	B	291	26	6B	13	C163	A	22	135	4E	5
C16	B	20	56	4D	2	C90	B	294	12	6D	13	C164	A	21	87	2E	5
C17	B	19	60	5D	2	C91	B	294	17	6C	13	C165	A	43	105	2D	5
C18	B	25	73	6D	2	C92	B	286	26	6B	13	C166	A	179	96	4E	9
C19	B	22	74	6D	2	C93	B	286	53	2B	13	C167	A	156	100	2E	9
C20	B	20	32	4C	2	C94	B	291	53	2B	13	C168	A	166	116	2F	9
C21	B	24	28	4B	2	C95	B	257	51	2D	13	C169	A	196	93	4F	9
C22	B	45	89	8B	2	C96	B	259	54	2D	13	C170	A	204	96	4E	9
C23	B	36	86	8C	2	C97	B	273	43	3B	13	C171	A	237	115	2F	10
C24	B	31	86	8C	2	C98	B	269	44	3C	13	C172	A	244	105	2E	10
C25	B	50	89	8A	2	C99	B	226	109	1C	10	C173	A	194	132	4D	7
C26	B	21	36	4C	2	C100	B	238	124	8C	7	C174	A	166	132	2E	7
C27	B	24	32	4A	2	C101	B	274	11	8B	13	C175	A	217	131	4E	7
C28	B	50	118	10B	5	C102	B	272	14	8B	13	C176	A	268	140	2E	8
C29	B	44	120	10A	5	C103	B	261	28	9B	13	C177	A	216	140	3F	7
C30	B	35	142	8A	5	C104	B	266	25	9B	13	C178	A	254	139	2F	8
C31	B	38	132	8C	5	C105	B	85	137	4D	6	C179	A	176	141	2F	7
C32	B	30	142	8B	5	C106	B	91	138	4C	6	C180	A	174	67	4E	11
C33	B	35	132	8C	5	C107	B	115	141	6B	6	C181	A	224	63	2F	12
C34	B	13	97	3B	5	C108	B	110	141	6B	6	C182	A	220	77	2E	12
C35	B	13	95	3B	5	C109	B	106	117	3B	6	C183	A	187	69	4E	11
C36	B	24	89	3D	5	C110	B	101	117	3B	6	C184	A	152	72	2E	11
C37	B	20	93	3C	5	C111	B	87	134	4D	6	C185	A	151	83	2F	11
C38	B	13	114	5A	5	C112	B	86	128	4D	6	C186	A	188	62	4F	11
C39	B	13	113	5B	5	C113	B	208	82	8C	11	C187	A	260	52	8D	13
C40	B	13	108	4D	5	C114	B	274	38	4D	13	C188	A	275	53	7D	13
C41	B	13	103	4C	5	C115	B	285	33	5C	13	C189	A	283	50	6E	13
C42	B	23	117	5C	5	C116	B	285	37	5B	13	C190	A	299	53	5E	13
C43	B	28	116	5C	5	C117	B	60	55	10C	3	C191	A	289	33	7D	13
C44	B	14	133	6B	5	C118	B	56	55	10C	3	C192	A	283	41	7E	13
C45	B	13	136	6A	5	C119	B	58	42	10B	3	C193	B	248	27	10C	13
C46	B	38	122	9C	5	C120	B	57	37	10A	3	C194	A	247	15	11E	13
C47	B	40	119	9C	5	C121	B	93	41	7C	3	C195	A	263	34	11D	13
C48	B	179	92	4C	9	C122	B	40	27	2B	3	C196	A	269	53	8C	13
C49	B	167	95	3A	9	C123	B	51	25	3B	3	C197	A	288	53	6D	13
C50	B	167	100	3A	9	C124	B	52	28	3B	3	C198	A	276	12	3E	13
C51	B	170	115	4C	9	C125	B	44	27	2B	3	C199	A	290	16	3F	13
C52	B	164	114	4C	9	C126	B	73	26	4D	3	C200	A	272	37	7E	13
C53	B	222	92	8A	9	C127	B	87	17	5D	3	C201	A	259	41	7F	13
C54	B	222	96	8A	9	C128	B	87	12	4D	3	C202	B	239	38	3D	14
C55	B	209	108	6B	9	C129	B	71	12	4D	3	C203	B	223	43	7F	14
C56	B	210	114	6C	9	C130	B	71	17	4D	3	C204	B	220	50	6E	14
C57	B	271	118	6C	10	C131	B	91	20	6C	3	C205	A	112	63	8B	15
C58	B	268	114	6C	10	C132	B	91	16	6C	3	C206	A	104	79	11B	15
C59	B	280	108	7B	10	C133	B	79	34	6B	3	C207	A	122	79	8D	15
C60	B	280	112	7B	10	C134	B	83	31	6B	3	C208	A	119	65	11D	15
C61	B	168	136	3C	7	C135	B	89	49	8B	3	C209	A	126	69	10E	15
C62	B	170	142	3C	7	C136	B	91	52	8B	3	C210	A	75	77	3B	15
C63	B	180	136	4B	7	C137	B	34	60	5B	4	C211	A	72	73	6B	15
C64	B	180	140	4B	7	C138	B	34	61	5B	4	C212	B	249	39	6B	17
C65	B	217	137	6D	7	C139	B	35	45	4C	4	C213	A	90	106	6B	17
C66	B	221	135	6C	7	C140	B	36	48	4C	4	C214	A	252	51	6A	17
C67	B	234	140	7B	7	C141	B	52	41	3D	4	C215	B	252	46	6A	17
C68	B	234	135	7B	7	C142	B	50	50	3D	4	C216	A	107	113	7C	17
C69	B	187	136	4C	7	C143	B	39	38	3D	4	C217	A	99	109	6C	17
C70	B	296	109	6B	8	C144	B	34	55	5B	4	C218	B	77	106	6C	17
C71	B	299	107	6B	8	C145	B	58	115	11C	5	C219	A	169	63	6F	17
C72	B	286	123	5C	8	C146	B	160	108	2C	9	C220	A	254	125	7E	17
C73	B	279	123	5D	8	C147	B	297	23	6C	13	C221	A	246	128	6E	17
C74	B	191	68	6C	11	C148	B	254	15	10C	13	C222	B	211	61	6D	17

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

				Benennung: EE IQ-CONVERTER				Sprache: Lang.: de		Blatt: Sh.: 1 +		Aei: C.I.: 04.05		
Designation: IQ-CONVERTER														
Typ: SMIQ			Datum: 99-02-03			Abteilung: 1GPK			Name: BU			Sachnr.: 1084.9300.01 XY		
Type: SMIQ			Date: 99-02-03			Dpt: 1GPK			Name: BU			Part No.: 1084.9300.01 XY		

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
C223	A	251	93	8E	17	C297	A	96	90	8B	15	C371	B	133	112	11B	6
C224	A	255	93	9E	17	C298	A	112	90	10B	15	C372	A	234	107	1E	10
C225	A	197	66	9E	17	C299	A	127	91	8D	15	C373	B	273	114	6C	10
C226	A	200	63	10E	17	C300	A	127	78	10D	15	C374	B	280	99	7C	10
C227	A	57	74	9C	17	C301	A	82	78	2B	15	C375	B	271	92	8C	10
C228	A	91	57	9D	17	C302	B	111	119	8C	6	C376	B	282	85	8C	10
C229	B	83	60	9D	17	C303	B	120	126	8C	6	C377	B	193	94	5B	9
C230	A	47	28	10D	17	C304	B	107	138	6C	6	C378	B	165	106	2B	9
C231	B	74	60	10D	17	C305	B	87	122	4D	6	C379	B	171	106	3B	9
C232	A	149	62	6F	17	C306	B	94	126	4C	6	C380	B	176	106	4B	9
C233	B	58	87	10A	17	C307	B	99	114	2C	6	C381	B	35	98	2C	5
C234	B	63	101	10B	17	C308	B	119	109	9B	6	C382	B	214	110	7B	9
C235	A	54	87	10A	17	C309	B	131	121	10B	6	C383	B	174	136	3C	7
C236	A	58	89	10A	17	C310	B	129	126	10B	6	C384	B	225	137	7C	7
C237	A	53	99	11B	17	C311	B	93	36	7C	3	C385	B	300	114	6C	8
C238	A	51	99	10B	17	C312	B	37	22	2C	3	C386	B	172	77	4B	11
C239	A	113	141	5F	6	C313	B	48	15	3C	3	C387	B	166	77	3B	11
C240	A	108	131	5E	6	C314	B	68	15	4C	3	C388	B	161	77	3B	11
C241	A	293	35	8D	13	C315	B	84	26	6B	3	C389	B	196	69	6B	11
C242	A	92	127	3E	6	C316	B	82	44	7C	3	C390	B	27	96	2C	5
C243	A	80	135	3F	6	C317	B	86	46	8B	3	C391	B	241	65	5C	12
C244	A	265	35	7E	13	C318	B	61	45	10B	3	C392	B	245	80	5C	12
C245	B	107	119	8D	6	C319	B	36	56	5B	4	C393	B	249	62	6C	12
C246	B	101	127	7D	6	C320	A	105	71	4F	14	C394	B	257	66	7B	12
C247	B	98	129	7D	6	C321	A	77	89	5A	15	C395	B	289	13	6C	13
C248	A	121	113	9D	6	C322	A	93	89	8A	15	C396	B	279	24	6C	13
C249	A	61	60	6E	3	C323	A	108	89	11A	15	C397	B	263	49	2D	13
C250	A	79	16	3E	3	C324	A	123	90	8C	15	C398	B	283	44	2A	13
C251	A	68	37	5E	3	C325	A	124	73	11C	15	C399	B	278	46	2A	13
C252	A	42	23	2E	3	C326	A	77	76	3A	15	C400	B	282	51	2C	13
C253	A	47	17	2F	3	C327	A	257	21	10D	13	C401	B	267	47	3C	13
C254	B	37	79	7C	4	C328	A	250	32	10E	13	C402	B	276	53	2C	13
C255	B	32	77	7C	4	C329	B	113	69	2E	15	C403	B	271	53	2D	13
C256	A	38	45	3E	4	C330	B	76	89	2E	15	C404	A	230	105	2E	10
C257	B	20	117	5C	5	C331	B	50	126	10B	5	C405	A	235	130	7D	7
C258	B	39	126	9C	5	C332	B	20	128	6B	5	C406	A	237	130	7D	7
C259	B	274	19	8C	13	C333	B	277	104	7B	10	C407	B	92	126	4C	6
C260	B	151	108	1B	9	C334	B	177	82	5C	11	C408	B	92	120	3C	6
C261	B	261	109	5B	10	C335	B	178	63	4D	11	C409	B	92	115	3C	6
C262	B	267	109	5B	10	C336	B	265	73	7B	12	C410	A	206	74	7C	11
C263	B	64	49	9B	3	C337	B	261	19	9C	13	C411	A	203	78	6C	11
C264	B	89	24	6B	3	C338	A	65	121	11D	5	C412	A	286	31	3E	13
C265	B	41	53	4B	4	C339	B	81	21	5C	3	C413	B	83	58	8C	3
C266	A	65	126	11D	5	C340	B	42	45	4C	4	C414	B	76	39	8C	3
C267	B	57	133	10D	5	C341	B	22	103	4C	5	C415	B	70	54	9C	3
C268	B	59	132	11D	5	C342	B	152	79	2B	11	C416	B	49	75	6C	4
C269	B	209	103	6B	9	C343	B	190	73	6B	11	C417	B	33	70	6C	4
C270	B	209	130	6C	7	C344	B	89	31	7C	3	C418	B	49	64	6C	4
C271	B	155	131	2C	7	C345	B	55	50	10C	3	C419	A	55	140	10D	5
C272	B	202	74	7B	11	C346	B	41	61	5C	4	C420	B	291	87	7C	8
C273	B	137	24	2C	17	C347	B	153	76	2C	11	C421	A	255	36	9E	13
C274	B	116	24	2C	17	C348	B	190	76	5B	11	C422	B	108	134	7C	6
C275	A	50	125	8D	5	C349	A	177	94	3D	9	C423	B	179	104	4B	9
C276	B	18	110	5B	5	C350	A	195	134	3D	7	C424	B	154	108	1B	9
C277	A	42	85	8D	2	C351	A	171	65	3D	11	C425	B	264	109	5B	10
C278	B	164	99	2B	9	C352	A	132	47	2D	16	C426	B	205	100	6B	9
C279	B	176	104	4B	9	C353	A	134	61	2C	16	C427	B	176	75	4B	11
C280	B	173	112	4B	9	C354	A	123	107	9D	6	C428	B	155	79	2C	11
C281	B	267	106	5C	10	C355	A	62	58	6E	3	C429	B	149	80	1B	11
C282	B	181	112	4B	9	C356	B	18	78	6C	2	C430	B	187	71	5B	11
C283	B	182	94	4C	9	C357	B	138	112	11B	6	C431	B	107	125	7D	6
C284	B	223	101	8B	9	C358	B	94	137	5C	6	C432	B	83	22	5C	3
C285	B	157	105	2C	9	C359	B	43	78	7C	4	C433	B	41	48	4C	4
C286	B	190	135	4C	7	C360	B	182	130	4B	7	C434	B	154	109	1B	9
C287	B	193	138	5C	7	C361	B	202	130	5C	7	C435	B	264	110	5B	10
C288	B	294	92	7C	8	C362	B	293	78	8B	8	C436	B	51	15	3C	3
C289	B	169	83	4B	11	C363	B	149	131	2C	7	C437	A	15	107	2E	5
C290	B	172	75	4B	11	C364	B	252	71	6B	12	C438	A	32	120	5E	5
C291	B	160	70	2B	11	C365	B	14	31	3C	2	C439	A	18	135	4E	5
C292	B	122	111	9B	6	C366	B	25	20	3B	2	C440	A	19	85	1E	5
C293	B	277	19	8C	13	C367	B	46	92	8B	2	C441	A	148	102	1E	9
C294	A	248	25	10D	13	C368	B	31	92	8C	2	C442	A	200	96	3E	9
C295	A	259	25	11D	13	C369	B	24	143	8B	5	C443	A	244	101	1E	10
C296	A	81	91	5B	15	C370	B	29	128	8C	5	C444	A	170	134	1E	7

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved.

				Benennung: EE IQ-CONVERTER Designation: IQ-CONVERTER				Sprache: de		Blatt: 2 +		Aei: C.I.: 04.05		
Typ: SMIQ			Datum: 99-02-03			Abteilung: 1GPK			Name: BU			Sachnr.: 1084.9300.01 XY Part No.:		

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved.

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
C445	A	222	133	3E	7	C519	B	73	22	4C	3	C593	B	241	116	3D	10
C446	A	276	143	1E	8	C520	B	50	47	3C	4	C594	B	239	109	3D	10
C447	A	212	78	1E	12	C521	B	22	15	2B	2	C595	B	271	142	3B	8
C448	A	185	67	3E	11	C522	B	45	101	9B	2	C596	B	269	140	3B	8
C449	A	144	74	1E	11	C523	B	24	25	4B	2	C597	B	259	141	2C	8
C450	A	270	13	3E	13	C524	B	17	33	4C	2	C598	B	258	134	2C	8
C451	A	289	27	2D	13	C525	B	42	86	8B	2	C599	B	227	81	4B	12
C452	A	123	114	9E	6	C526	B	33	89	8C	2	C600	B	226	84	4A	12
C453	A	104	129	4E	6	C527	B	39	100	9B	2	C601	B	224	71	3C	12
C454	B	245	111	3C	10	C528	B	44	124	9B	5	C602	B	227	70	3C	12
C455	A	87	125	2E	6	C529	A	38	104	10D	2	C603	A	276	116	3F	10
C456	A	129	114	10E	6	C530	B	60	115	11B	5	C604	A	271	110	3E	10
C457	A	79	12	3E	3	C531	B	32	131	8C	5	C605	A	275	113	3E	10
C458	A	64	35	4E	3	C532	B	31	140	8B	5	C606	A	274	125	4F	8
C459	A	35	21	2E	3	C533	B	38	105	2C	5	C607	A	291	128	4E	8
C460	B	124	114	9C	6	C534	B	32	96	2C	5	C608	A	297	126	3E	8
C461	A	252	19	11E	13	C535	B	32	104	2C	5	C609	A	252	83	3F	12
C462	B	121	53	3C	16	C536	B	26	93	2C	5	C610	A	256	62	3E	12
C463	B	121	48	3D	16	C537	B	20	99	4C	5	C611	A	254	61	3E	12
C464	B	152	105	1C	9	C538	B	18	95	3C	5	C612	B	232	104	2B	10
C465	B	262	106	5C	10	C539	B	16	106	5B	5	C613	B	291	132	5C	8
C466	B	294	81	8C	8	C540	B	24	96	3C	5	C614	B	239	101	2C	10
C467	B	248	130	1B	8	C541	B	22	122	6B	5	C615	B	219	74	2B	12
C468	B	258	130	2B	8	C542	B	56	111	11B	5	C616	B	219	71	2B	12
C469	B	109	127	7C	6	C543	B	186	103	5B	9	C617	B	285	132	4C	8
C470	B	110	129	7C	6	C544	B	189	130	4B	7	C618	B	263	137	2C	8
C471	B	234	27	3F	14	C545	B	222	130	6B	7	C619	B	236	104	2B	10
C472	B	80	78	1E	15	C546	B	196	130	5B	7	C620	B	216	76	2B	12
C473	A	131	71	1E	15	C547	B	144	130	1B	7	C621	B	236	105	2B	10
C474	B	149	79	1B	11	C548	B	168	131	2B	7	C622	B	234	101	2C	10
C475	B	187	73	5B	11	C549	B	234	71	5B	12	C623	B	272	131	3C	8
C476	B	21	111	5C	5	C550	B	294	20	6C	13	C624	B	216	74	2B	12
C477	B	200	107	6B	9	C551	B	283	29	6B	13	C625	B	213	74	2B	12
C478	B	146	79	1B	11	C552	B	277	85	1C	13	C626	B	243	96	3C	10
C479	B	184	73	5B	11	C553	B	267	71	1D	13	C627	B	230	96	2C	10
C480	B	76	22	5C	3	C554	B	266	43	3C	13	C628	B	290	129	5C	8
C481	B	79	22	5C	3	C555	B	267	21	8B	13	C629	B	294	137	5D	8
C482	B	44	47	3C	4	C556	B	20	102	4C	5	C630	B	282	137	4C	8
C483	B	47	47	3C	4	C557	B	252	15	11C	13	C631	B	224	63	2C	12
C484	B	148	100	1C	9	C558	A	65	132	11E	5	C632	B	212	68	1C	12
C485	B	149	94	1C	9	C559	A	247	29	10E	13	C633	B	239	104	2B	10
C486	B	161	100	2C	9	C560	B	136	115	10C	6	C634	B	255	106	4B	10
C487	B	160	94	2C	9	C561	B	116	124	9C	6	C635	B	271	134	3B	8
C488	B	258	101	4C	10	C562	B	98	137	5B	6	C636	B	292	124	5B	8
C489	B	271	101	5C	10	C563	B	87	110	2D	6	C637	B	279	132	4B	8
C490	B	193	113	5A	9	C564	B	86	30	6B	3	C638	B	229	76	4B	12
C491	B	193	108	5A	9	C565	B	67	48	9B	3	C639	B	59	124	11C	5
C492	B	146	136	1C	7	C566	B	58	47	10B	3	C640	B	57	124	10C	5
C493	B	158	126	1C	7	C567	B	39	61	5B	4	C641	B	253	24	10C	13
C494	B	212	135	5D	7	C568	B	128	110	10C	6	C642	B	255	24	10C	13
C495	B	217	125	6C	7	C569	A	277	45	5E	13	C643	A	79	80	3A	15
C496	B	199	135	5C	7	C570	A	258	45	5F	13	C644	A	70	84	6A	15
C497	B	254	125	1B	8	C571	A	251	43	6A	17	C645	A	106	65	8A	15
C498	B	257	124	1B	8	C572	A	36	43	3E	4	C646	A	108	77	11A	15
C499	B	158	140	2D	7	C573	B	135	119	10B	6	C647	A	121	71	11D	15
C500	B	158	136	2D	7	C574	A	232	24	3F	14	C648	A	117	83	8D	15
C501	B	163	126	2C	7	C575	A	170	23	2B	17	C649	B	227	106	1C	10
C502	B	182	82	5B	11	C576	A	153	23	2B	17	C650	B	226	101	1B	10
C503	B	194	85	6B	11	C577	A	134	23	2C	17	C651	B	239	131	8B	7
C504	B	157	63	2D	11	C578	A	113	23	2C	17	C652	B	241	126	8C	7
C505	B	157	68	2C	11	C579	A	161	22	2D	17	C653	B	239	137	8B	7
C506	B	144	71	1C	11	C580	A	31	97	9E	2	C654	B	206	79	8B	11
C507	B	145	65	1C	11	C581	B	181	108	4B	9	C655	B	205	74	8B	11
C508	A	45	111	8D	5	C582	B	178	78	5C	11	C656	B	205	70	7A	11
C509	A	59	108	8E	5	C583	B	115	127	8C	6	C657	B	271	39	4D	13
C510	A	163	51	2E	16	C584	B	84	41	7C	3	C658	B	265	34	4C	13
C511	A	140	51	1F	16	C585	B	185	129	4C	7	C659	B	258	37	4C	13
C512	A	132	53	2E	16	C586	B	238	128	8C	7	C660	B	120	117	9C	6
C513	B	173	24	2B	17	C587	B	293	102	7C	8	C661	A	264	28	11D	13
C514	B	157	24	2B	17	C588	B	286	18	7C	13	C670				7C	8
C515	B	164	24	2D	17	C589	B	227	96	8A	9	C671				9D	6
C516	A	63	114	11E	5	C590	B	275	133	3B	8	D1	B	194	16	2B	14
C517	B	40	110	1C	5	C591	B	253	110	4B	10	D1	B	194	16	2B	14
C518	B	157	108	2B	9	C592	B	253	115	4B	10	D1	B	194	16	2C	14

			Benennung: EE IQ-CONVERTER Designation: IQ-CONVERTER				Sprache: Lang.: de		Blatt: Sh.: 3 +		Aei: C.I.: 04.05	
Typ: Type: SMIQ		Datum: Date: 99-02-03		Abteilung: Dpt: 1GPK		Name: Name: BU		Sachnr.: Part No.: 1084.9300.01 XY				

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. <i>Part</i>	Seite <i>Side</i>	X	Y	Planq. <i>Sqr</i>	Bl. <i>Pg</i>	el. Kennz. <i>Part</i>	Seite <i>Side</i>	X	Y	Planq. <i>Sqr</i>	Bl. <i>Pg</i>	el. Kennz. <i>Part</i>	Seite <i>Side</i>	X	Y	Planq. <i>Sqr</i>	Bl. <i>Pg</i>
D1	B	194	16	2C	14	L35	B	42	97	9C	2	L111	B	169	103	3B	9
D1	B	194	16	2F	14	L36	B	50	120	10B	5	L112	B	86	33	7B	3
D2	B	194	41	5F	14	L37	B	16	99	3B	5	L113	B	173	109	3B	9
D2	B	194	41	6C	14	L38	B	108	141	6B	6	L115	B	173	103	3B	9
D2	B	194	41	6C	14	L39	B	100	117	3B	6	L116	B	176	104	4B	9
D2	B	194	41	8D	14	L40	B	131	125	10B	6	L117	B	157	93	2C	9
D2	B	194	41	8E	14	L41	B	62	54	9C	3	L118	B	184	90	5B	9
D3	A	48	105	1D	5	L42	B	125	126	10A	6	L119	B	180	97	4C	9
D3	A	48	105	8E	5	L43	B	51	21	3B	3	L120	B	185	103	5B	9
D4	B	112	73	4F	14	L44	B	92	23	6C	3	L121	B	267	94	5C	10
D4	B	112	73	5B	14	L45	B	284	33	5C	13	L122	B	214	108	7B	9
D5	B	170	43	5F	14	L46	B	21	91	3C	5	L123	B	213	103	7B	9
D5	B	170	43	6C	14	L47	B	36	51	4C	4	L124	B	217	103	7B	9
D6	B	101	73	4F	14	L48	B	183	135	4C	7	L125	B	191	105	5B	9
D6	B	101	73	6B	14	L49	B	21	33	4C	2	L126	B	269	138	3B	8
D7	B	90	85	2E	15	L50	B	24	31	4B	2	L127	B	197	105	5B	9
D7	B	90	85	4A	15	L51	B	48	89	8B	2	L128	B	203	104	6B	9
D8	B	106	85	1E	15	L52	B	34	86	8C	2	L129	B	207	104	6B	9
D8	B	106	85	7A	15	L53	B	50	123	10B	5	L130	B	271	109	6B	10
D9	B	121	85	4E	15	L54	B	36	130	8C	5	L131	B	273	109	6B	10
D9	B	121	85	9A	15	L55	B	33	142	8A	5	L132	B	277	100	7B	10
D10	B	136	85	4E	15	L56	B	24	93	3C	5	L133	B	277	97	7B	10
D10	B	136	85	7C	15	L57	B	294	15	6C	13	L134	B	277	90	8B	10
D11	B	136	73	3E	15	L58	B	289	26	6B	13	L135	B	277	86	8B	10
D11	B	136	73	9C	15	L59	B	272	43	3C	13	L136	B	273	94	8C	10
D12	B	91	73	1A	15	L60	B	281	33	5C	13	L137	B	281	85	8C	10
D12	B	91	73	5E	15	L61	A	51	28	10D	17	L138	B	279	99	7C	10
D13	B	218	41	6F	14	L62	A	54	91	11A	17	L139	B	149	140	2C	7
D13	B	218	41	9D	14	L63	A	63	93	11B	17	L140	B	155	143	2C	7
D14	B	206	41	6F	14	L64	B	105	141	6B	6	L141	B	147	132	1B	7
D14	B	206	41	9D	14	L65	B	97	117	3C	6	L142	B	152	129	2B	7
D15	B	237	32	3D	14	L67	B	13	99	3B	5	L143	B	159	130	2B	7
D15	B	237	32	3F	14	L68	B	58	44	10B	3	L144	B	166	130	2B	7
D15	B	237	32	4D	14	L69	B	50	18	3B	3	L145	B	174	130	3B	7
D15	B	237	32	4D	14	L70	B	154	72	2C	11	L146	B	172	129	3B	7
D15	B	237	32	7F	14	L71	B	83	30	6B	3	L147	B	174	135	3C	7
D17	B	182	43	5F	14	L72	B	35	60	5B	4	L148	B	188	130	4B	7
D17	B	182	43	6D	14	L73	B	145	75	1C	11	L149	B	272	139	3C	8
D18	B	221	32	3A	14	L74	B	13	111	5B	5	L150	B	200	131	5B	7
D18	B	221	32	3F	14	L75	B	14	102	4C	5	L151	B	206	129	5B	7
L1	B	224	106	8B	9	L76	B	15	132	6B	5	L152	B	213	129	6B	7
L2	B	274	101	7C	10	L77	B	14	136	6A	5	L153	B	220	128	6B	7
L3	B	147	18	1B	17	L78	B	202	77	7A	11	L154	B	202	139	5C	7
L4	B	126	18	1C	17	L79	B	265	76	7B	12	L155	B	209	142	6C	7
L5	B	106	18	1C	17	L80	B	163	72	3A	11	L156	B	226	128	6B	7
L6	B	103	42	3C	17	L81	B	83	52	8C	3	L157	B	227	129	7B	7
L7	B	267	78	8B	12	L83	B	261	26	9B	13	L158	B	225	135	7C	7
L8	B	39	97	9C	2	L84	B	113	141	6B	6	L159	B	245	134	1C	8
L9	B	20	133	7B	5	L85	B	14	41	4C	2	L160	B	298	114	6C	8
L10	B	14	110	5B	5	L86	B	12	56	5C	2	L161	B	292	119	5B	8
L11	B	18	103	4C	5	L87	B	13	69	5C	2	L162	B	292	116	6B	8
L12	B	16	129	6B	5	L88	B	24	64	5C	2	L163	B	293	90	7B	8
L13	B	180	134	4B	7	L89	B	192	79	6B	11	L164	B	293	85	7B	8
L14	B	234	133	7B	7	L90	B	58	116	11B	5	L165	B	293	79	8B	8
L15	B	296	107	6B	8	L91	B	183	76	5B	11	L166	B	298	99	7C	8
L16	B	286	50	1A	13	L92	B	46	123	9B	5	L167	B	288	103	7C	8
L17	B	279	19	7C	13	L93	B	212	71	1B	12	L168	B	297	68	8C	8
L18	B	261	23	9B	13	L94	B	27	110	2C	5	L169	B	227	79	4B	12
L19	B	297	104	7C	8	L95	B	48	103	2C	5	L170	B	239	89	2C	10
L20	B	248	53	6A	17	L96	B	37	101	1C	5	L171	B	148	70	1C	11
L21	B	233	53	5A	17	L97	B	26	98	2C	5	L172	B	153	68	2C	11
L22	B	233	50	5A	17	L98	B	273	112	6C	10	L173	B	178	65	4C	11
L23	B	248	49	6A	17	L99	B	205	93	6B	9	L174	B	244	104	3B	10
L24	B	61	91	10A	17	L100	B	200	113	6B	9	L175	B	263	130	2B	8
L25	B	77	92	9A	17	L101	B	193	97	5B	9	L176	B	172	75	4B	11
L26	B	61	95	10B	17	L102	B	162	108	2B	9	L177	B	291	144	5C	8
L27	B	77	96	9B	17	L103	B	221	68	2B	12	L178	B	283	133	4B	8
L28	B	205	61	6D	17	L104	B	166	109	2B	9	L179	B	164	74	3B	11
L29	B	196	53	5D	17	L105	B	181	104	4B	9	L180	B	162	74	3B	11
L30	B	111	104	6B	17	L106	B	164	104	2B	9	L181	B	160	75	2B	11
L31	B	112	94	5B	17	L107	B	166	103	2B	9	L182	B	289	133	4B	8
L32	B	89	60	9D	17	L108	B	177	74	4B	11	L183	B	157	78	2B	11
L33	B	105	60	8D	17	L109	B	171	109	3B	9	L184	B	294	133	5B	8
L34	B	80	60	10D	17	L110	B	110	125	8C	6	L185	B	168	74	3B	11

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved.

ROHDE & SCHWARZ			Benennung: EE IQ-CONVERTER Designation: IQ-CONVERTER			Sprache: de Lang.:		Blatt: 4 + Sh.:		Aei: 04.05 C.I.:	
Typ: SMIQ Type:		Datum: 99-02-03 Date:		Abteilung: 1GPK Dpt:		Name: BU Name:		Sachnr.: 1084.9300.01 XY Part No.:			

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
L186	B	167	80	3B	11	L261	B	138	114	11B	6	N9	B	128	47	3C	16
L187	B	162	80	2B	11	L262	B	234	78	4B	12	N9	B	128	47	3D	16
L188	B	169	80	4B	11	L263	B	285	53	2C	13	N10	B	219	101	7B	9
L189	B	182	73	5B	11	L266	B	90	37	7C	3	N11	B	275	106	6B	10
L190	B	180	62	5B	11	L267	B	43	22	2C	3	N12	B	180	128	3B	7
L191	B	186	81	5B	11	L269	B	81	12	5C	3	N13	B	233	128	7B	7
L192	B	190	83	5B	11	L270	B	78	31	5C	3	N14	B	291	107	6B	8
L193	B	194	73	6B	11	L271	B	75	15	4C	3	N15	B	200	73	7B	11
L194	B	195	73	6B	11	L273	B	93	46	7C	3	N16	B	263	71	7B	12
L195	B	46	64	6C	4	L274	B	84	48	8B	3	N17	B	46	20	2C	3
L196	B	238	71	5B	12	L275	B	79	48	8B	3	N18	A	55	125	11D	5
L197	B	243	72	5B	12	L276	B	76	43	8C	3	N18	A	55	125	8E	5
L198	B	248	71	6B	12	L277	B	73	48	8B	3	N19	A	250	24	10D	13
L199	B	251	71	6B	12	L278	B	70	52	9C	3	N19	A	250	24	11D	13
L200	B	256	71	6B	12	L279	B	68	48	9B	3	N20	B	253	104	4B	10
L201	B	258	71	7B	12	L280	B	42	36	4C	4	N21	B	269	133	3B	8
L202	B	117	107	9B	6	L283	B	43	76	6B	4	N22	B	227	74	3B	12
L203	B	196	70	6B	11	L284	B	47	75	6C	4	N23	B	274	30	4C	13
L204	B	285	141	4C	8	L285	B	39	63	5B	4	P3	B	64	116	11E	5
L205	B	241	67	5C	12	L286	B	37	70	6C	4	P4	B	45	109	1D	5
L206	B	245	77	5B	12	L287	B	41	67	6B	4	P5	B	45	106	1D	5
L207	B	249	65	6B	12	L288	B	42	73	6B	4	P6	B	235	43	10E	14
L208	B	257	68	7B	12	L289	B	49	40	3C	4	P7	B	144	47	4D	16
L209	B	128	105	10C	6	L290	B	45	55	3C	4	P8	B	144	44	5B	16
L210	B	295	126	5B	8	L293	B	280	106	7B	10	P9	B	144	42	2C	16
L211	B	262	129	2B	8	L294	B	167	101	3A	9	P10	B	144	39	4A	16
L212	B	23	125	6B	5	L295	B	223	98	8A	9	P11	B	144	37	4B	16
L213	B	263	135	2C	8	L298	B	204	79	7B	11	P12	B	144	34	4E	16
L214	B	215	66	2C	12	L299	B	236	134	7C	7	P13	B	175	50	6C	14
L215	B	227	110	1C	10	L300	A	134	70	3B	17	P14	B	177	50	6C	14
L216	B	230	112	2C	10	L301	A	221	43	3B	17	P15	B	180	50	7D	14
L217	B	248	104	3B	10	L302	A	230	28	3C	17	P16	B	182	50	7D	14
L218	B	219	63	2C	12	L303	B	81	75	3C	17	R1	B	17	37	4C	2
L219	B	245	108	3C	10	L304	A	135	16	1B	17	R2	B	13	72	6C	2
L220	B	224	74	3B	12	L305	A	116	16	1D	17	R3	A	155	108	2E	9
L221	B	213	82	8B	11	L306	B	85	105	6B	17	R4	A	157	108	2E	9
L222	B	206	84	8B	11	L307	B	164	62	6F	17	R5	B	230	106	2C	10
L223	B	272	34	4C	13	L308	A	64	69	9C	17	R6	B	241	129	8C	7
L224	B	276	39	4D	13	L309	B	246	43	6A	17	R7	A	151	79	2E	11
L225	B	32	111	2C	5	L310	A	254	43	6A	17	R8	A	153	79	2E	11
L226	B	254	17	10C	13	L311	B	64	87	10A	17	R9	B	48	123	9B	5
L227	B	110	112	8C	6	L312	A	58	93	11A	17	R10	B	57	121	10C	5
L228	B	113	112	9C	6	L313	A	63	95	11B	17	R11	B	36	104	2C	5
L229	B	115	124	9C	6	L314	B	18	135	7C	5	R12	B	23	126	6B	5
L230	B	106	136	6C	6	L315	B	280	17	7C	13	R13	B	27	102	2C	5
L231	B	107	132	7C	6	L316	B	193	106	5A	9	R14	B	213	76	8B	11
L232	B	109	128	7C	6	L319	A	250	40	6A	17	R15	B	206	76	8B	11
L233	B	122	138	6C	6	L320	A	277	49	6A	17	R16	B	184	101	5B	9
L234	B	134	134	7C	6	L321	A	260	20	6A	17	R17	B	182	101	4B	9
L235	B	133	129	7C	6	N1	A	111	70	11B	15	R18	B	275	103	7C	10
L236	B	253	109	4B	10	N1	A	111	70	11D	15	R19	B	190	132	4C	7
L237	B	265	22	8B	13	N1	A	111	70	2E	15	R20	B	194	128	5C	7
L238	B	94	126	4C	6	N1	A	111	70	8B	15	R21	B	180	72	5B	11
L239	B	100	136	5B	6	N1	A	111	70	8D	15	R22	B	178	72	4C	11
L240	B	20	132	6B	5	N2	B	134	58	2D	16	R23	B	263	22	9B	13
L241	B	94	118	3C	6	N3	B	78	81	2E	15	R24	B	255	21	10C	13
L242	B	94	116	3C	6	N3	B	78	81	3B	15	R25	B	139	52	5C	16
L243	B	94	114	2C	6	N3	B	78	81	5B	15	R26	B	102	136	5B	6
L244	B	53	124	10B	5	N4	A	286	39	5F	13	R27	A	123	116	9E	6
L245	B	89	111	2D	6	N4	A	286	39	6E	13	R28	A	127	113	9E	6
L246	B	257	20	9C	13	N4	A	286	39	8D	13	R29	A	128	118	10E	6
L247	B	94	122	3C	6	N5	A	261	40	5F	13	R30	A	129	112	10E	6
L248	B	89	123	4D	6	N5	A	261	40	7F	13	R31	B	86	34	7C	3
L249	B	89	121	3D	6	N5	A	261	40	8D	13	R32	B	86	44	7C	3
L250	B	89	116	3D	6	N6	A	149	43	1E	16	R33	B	164	102	2B	9
L252	B	132	111	11A	6	N6	A	149	43	3A	16	R34	B	160	73	2B	11
L253	B	13	76	6C	2	N6	A	149	43	3B	16	R35	B	266	34	4C	13
L254	B	271	19	8C	13	N7	A	35	90	8E	2	R36	A	98	122	3E	6
L255	B	104	139	6C	6	N7	A	35	90	8E	2	R37	A	100	122	3E	6
L256	B	278	139	4C	8	N7	A	35	90	9E	2	R38	B	268	39	4C	13
L257	B	260	55	2D	13	N8	B	54	15	3C	3	R39	B	295	24	6C	13
L258	B	122	112	9B	6	N9	B	128	47	2C	16	R40	A	102	122	3E	6
L259	B	128	118	10B	6	N9	B	128	47	2E	16	R41	A	104	122	3E	6
L260	B	273	48	2C	13	N9	B	128	47	3B	16	R42	B	295	20	6C	13


Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

		Benennung: EE IQ-CONVERTER Designation: IQ-CONVERTER	Sprache: Lang.: de	Blatt: Sh.: 5 +	Aei: C.I.: 04.05
Typ: Type: SMIQ	Datum: Date: 99-02-03	Abteilung: Dpt: 1GPK	Name: Name: BU	Sachnr.: 1084.9300.01 XY Part No.:	

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
R43	A	227	109	2E	10	R119	B	208	79	8B	11	R194	A	214	25	3B	14
R44	B	35	17	2E	6	R120	B	21	119	5C	5	R195	A	214	21	3B	14
R45	B	80	127	2D	6	R121	B	25	116	5C	5	R196	A	214	19	3B	14
R46	A	240	125	7D	7	R122	B	37	126	9C	5	R197	A	214	17	3B	14
R47	B	25	78	6D	2	R123	B	40	122	9C	5	R198	A	224	31	3B	14
R48	A	22	38	4D	2	R124	A	43	107	2D	5	R199	A	230	25	3C	14
R49	A	25	36	4A	2	R125	A	45	104	2D	5	R200	A	216	15	4B	14
R50	A	30	99	9E	2	R126	B	169	114	4C	9	R201	A	218	16	4B	14
R51	A	38	141	8A	5	R127	B	172	112	4C	9	R202	A	220	16	4B	14
R52	A	39	132	8C	5	R128	B	151	102	1C	9	R203	A	223	16	4B	14
R53	A	181	94	4E	9	R129	B	149	99	1C	9	R204	A	225	16	4B	14
R54	B	183	132	4C	7	R130	B	160	99	2C	9	R205	A	227	16	4B	14
R55	B	236	131	7C	7	R131	B	261	103	4C	10	R206	A	229	16	4B	14
R56	A	193	134	4D	7	R132	B	259	100	4C	10	R207	A	231	16	4B	14
R57	B	248	128	8C	7	R133	B	270	100	5C	10	R208	B	239	30	3D	14
R58	B	204	76	7B	11	R134	B	210	105	7B	9	R209	B	230	35	7F	14
R59	B	267	74	8B	12	R135	B	210	109	7B	9	R210	B	184	42	6D	14
R60	A	178	67	4E	11	R136	B	193	111	5A	9	R211	B	174	44	6D	14
R61	A	294	24	6A	13	R137	B	192	101	5B	9	R212	B	105	73	5B	14
R62	A	294	12	6D	13	R138	B	202	107	5B	9	R213	B	94	73	6B	14
R63	A	294	51	2B	13	R139	B	204	101	6B	9	R214	B	162	42	5C	14
R64	A	258	47	2C	13	R140	B	269	110	6C	10	R215	B	220	47	8D	14
R65	A	275	45	3B	13	R141	B	269	115	6C	10	R216	B	208	47	8E	14
R66	A	112	54	4C	16	R142	B	170	133	3C	7	R217	B	197	43	7C	14
R67	A	121	46	4E	16	R143	B	170	137	3C	7	R218	A	35	101	9D	2
R68	B	107	121	8D	6	R144	B	148	134	1C	7	R219	B	185	48	8D	14
R69	B	100	125	7D	6	R145	B	146	137	1C	7	R220	B	185	44	8D	14
R70	A	115	112	10C	6	R146	B	217	128	6C	7	R221	B	199	44	9E	14
R71	A	91	42	7C	3	R147	B	216	125	6C	7	R222	B	229	48	10D	14
R72	B	36	78	7C	4	R148	B	210	133	5C	7	R223	B	232	43	10E	14
R73	A	78	85	6A	15	R149	B	199	137	5C	7	R224	A	28	103	9D	2
R74	A	93	83	8A	15	R150	B	201	133	5C	7	R225	A	72	79	6B	15
R75	A	108	84	11A	15	R151	B	212	136	5D	7	R226	B	83	85	4A	15
R76	A	124	83	8C	15	R152	B	223	132	6C	7	R227	B	133	121	10B	6
R77	A	75	71	3A	15	R153	B	221	137	6D	7	R228	A	114	68	9B	15
R78	B	40	126	9C	5	R154	B	258	131	2C	8	R229	B	98	85	6A	15
R79	A	208	80	7C	11	R155	B	254	127	1B	8	R230	B	114	85	9A	15
R80	B	20	119	5B	5	R156	B	284	123	5C	8	R231	A	106	81	11B	15
R81	A	283	35	3E	13	R157	B	158	137	2D	7	R233	A	288	22	4E	13
R82	A	265	51	8D	13	R158	B	291	123	5C	8	R234	A	122	81	9D	15
R83	A	295	33	8E	13	R159	B	156	134	2C	7	R235	B	129	85	6C	15
R84	B	120	114	9C	6	R160	B	249	128	1C	8	R236	B	129	73	9C	15
R85	B	261	37	4C	13	R161	B	162	129	2C	7	R237	A	119	67	11D	15
R86	B	185	130	4B	7	R162	B	161	126	2C	7	R238	A	232	107	1D	10
R87	B	238	129	7B	7	R163	B	192	71	6C	11	R239	B	83	73	1A	15
R88	B	292	102	7B	8	R164	B	182	78	5B	11	R240	A	235	132	7D	7
R89	A	256	47	8F	13	R165	B	181	81	5B	11	R241	A	203	80	7C	11
R90	B	295	23	6C	13	R166	B	195	84	6B	11	R242	A	287	27	2D	13
R91	A	18	52	4D	2	R167	B	156	66	2C	11	R243	A	138	39	4A	16
R92	B	258	109	4B	10	R168	B	145	69	1C	11	R244	A	210	47	4D	16
R93	A	45	106	2D	5	R169	B	145	74	1C	11	R245	A	210	43	4E	16
R95	B	94	139	5C	6	R170	B	192	66	6C	11	R246	A	214	43	4E	16
R96	B	128	108	10C	6	R171	B	239	76	5C	12	R247	B	133	53	3B	16
R97	B	32	24	1C	3	R172	B	253	73	6B	12	R248	B	132	55	4C	16
R98	A	48	89	8A	2	R173	B	158	83	4C	11	R249	B	131	45	4C	16
R99	A	48	91	8D	2	R174	B	253	77	6C	12	R250	B	139	42	4C	16
R100	B	21	95	3C	5	R175	B	167	83	4C	11	R251	A	138	37	4B	16
R101	B	227	103	1C	10	R176	B	247	69	6B	12	R252	B	127	60	2D	16
R102	B	294	104	7C	8	R177	B	247	73	5B	12	R253	A	101	108	6C	17
R103	A	57	117	7E	5	R178	B	239	69	5C	12	R254	A	95	110	6C	17
R104	B	286	46	1A	13	R179	B	272	17	8B	13	R255	A	246	126	6E	17
R106	B	226	106	1C	10	R180	B	274	14	8B	13	R256	A	249	93	8E	17
R107	B	239	126	8C	7	R181	B	253	29	10C	13	R257	A	197	64	10E	17
R108	B	18	47	4C	2	R182	A	252	36	9E	13	R258	A	51	101	10B	17
R109	B	17	55	4D	2	R183	B	255	29	10C	13	R259	A	49	98	10B	17
R110	B	16	62	5C	2	R184	A	258	36	9E	13	R260	A	248	128	7E	17
R111	B	16	59	5D	2	R185	A	247	31	10E	13	R261	A	253	95	8E	17
R112	B	25	74	6C	2	R186	A	257	30	11E	13	R262	A	199	66	10E	17
R113	B	21	74	6C	2	R187	A	247	18	10E	13	R263	A	125	114	9E	6
R114	B	59	129	11C	5	R188	A	249	17	11E	13	R264	A	90	132	3E	6
R115	B	57	129	10C	5	R189	B	271	38	4D	13	R265	B	94	135	5C	6
R116	B	61	132	11D	5	R191	A	214	31	3B	14	R266	B	89	137	5C	6
R117	B	56	132	10D	5	R192	A	214	29	3B	14	R267	B	104	127	7D	6
R118	A	60	118	11E	5	R193	A	214	27	3B	14	R268	B	100	127	7D	6

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

 ROHDE & SCHWARZ	Benennung: EE IQ-CONVERTER Designation: IQ-CONVERTER		Sprache: Lang.: de	Blatt: Sh.: 6+	Aei: C.I.: 04.05
	Typ: Type: SMIQ	Datum: Date: 99-02-03	Abteilung: Dpt.: 1GPK	Name: Name: BU	Sachnr.: Part No.: 1084.9300.01 XY

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz.	Seite	X	Y	Planq.	Bl.	el. Kennz.	Seite	X	Y	Planq.	Bl.	el. Kennz.	Seite	X	Y	Planq.	Bl.
Part	Side			Sqr	Pg	Part	Side			Sqr	Pg	Part	Side			Sqr	Pg
R269	B	87	125	4D	6	R343	B	239	134	8B	7	R417	A	197	77	7B	11
R270	B	87	129	4D	6	R344	B	177	79	5C	11	R418	A	280	28	3D	13
R271	A	22	97	2E	5	R345	B	176	63	5D	11	R419	A	224	106	2D	10
R272	B	14	95	3B	5	R346	B	203	71	7A	11	R420	A	241	134	7C	7
R273	A	68	27	4D	3	R347	B	184	35	3B	14	R421	A	81	87	5A	15
R274	B	38	25	2B	3	R348	B	208	24	3B	14	R422	A	97	86	8A	15
R275	B	43	26	2B	3	R349	B	196	20	2C	14	R423	A	112	86	11A	15
R276	B	76	27	5C	3	R350	B	179	27	2E	14	R424	A	127	87	8C	15
R277	B	71	27	5D	3	R351	B	185	27	2D	14	R425	A	81	74	2A	15
R278	B	83	17	5C	3	R352	B	190	27	2C	14	R426	A	205	82	7B	11
R279	B	86	15	5D	3	R353	B	110	119	8C	6	R427	A	279	30	3D	13
R280	B	72	15	4D	3	R354	B	93	38	7C	3	R428	B	287	36	5B	13
R281	B	73	20	4C	3	R355	B	84	42	7C	3	R429	B	285	36	5B	13
R282	A	237	107	2D	10	R356	A	28	88	7E	2	R430	B	89	123	4D	6
R283	B	91	51	8B	3	R357	A	16	114	3E	5	R431	B	59	118	11B	5
R284	B	88	49	8B	3	R358	A	62	132	7E	5	R432	B	42	108	1C	5
R285	B	81	50	8C	3	R359	A	22	99	1E	5	R433	A	212	96	4E	9
R286	B	74	46	8C	3	R360	A	175	103	4D	9	R434	A	212	98	4E	9
R287	B	71	50	9C	3	R361	A	202	129	4C	7	R435	A	244	113	2E	10
R288	B	45	73	6C	4	R362	A	169	74	4D	11	R436	A	242	113	2E	10
R289	B	39	71	6C	4	R363	A	275	51	7C	13	R437	A	172	124	2E	7
R290	B	44	66	5C	4	R364	A	300	48	5E	13	R438	A	223	123	4E	7
R291	B	35	62	5B	4	R365	A	281	37	7E	13	R439	A	271	134	2E	8
R292	B	32	63	5B	4	R366	A	280	36	7E	13	R440	A	170	124	2E	7
R293	B	40	79	7C	4	R367	A	114	63	9B	15	R441	A	225	123	4E	7
R294	B	32	80	7C	4	R368	A	104	77	11B	15	R442	A	273	134	2E	8
R295	B	51	39	3D	4	R369	A	121	77	9D	15	R443	A	186	77	4E	11
R296	B	51	44	3C	4	R370	A	117	65	11D	15	R444	A	188	77	4E	11
R297	B	40	41	3C	4	R371	A	123	65	10D	15	R445	A	221	85	2E	12
R298	B	47	52	3C	4	R372	A	75	75	3B	15	R446	A	219	85	2E	12
R299	B	50	53	3D	4	R373	A	72	71	6B	15	R447	B	253	18	10C	13
R300	B	37	40	3D	4	R374	B	130	53	3B	16	R448	B	208	29	3B	14
R301	A	33	87	7D	2	R375	A	135	57	4C	16	R449	B	194	35	3C	14
R302	A	50	132	7D	5	R376	A	53	64	6E	3	R450	B	189	35	3D	14
R303	A	153	107	2E	9	R377	A	173	103	4D	9	R451	B	198	27	2B	14
R304	A	149	79	2E	11	R378	A	202	127	4C	7	R452	B	179	35	3E	14
R305	A	281	52	5E	13	R379	A	171	75	4D	11	R453	B	199	20	2B	14
R306	A	258	54	7D	13	R380	A	55	66	7E	3	R454	B	182	25	2B	14
R307	A	289	37	7D	13	R381	A	57	43	5E	3	R455	B	74	88	2E	15
R308	A	255	41	7F	13	R382	A	73	23	3E	3	R456	A	136	61	3B	17
R309	B	228	40	11D	14	R383	A	42	51	3E	4	R457	B	61	126	11C	5
R310	A	73	88	5B	15	R384	B	61	120	11C	5	R458	B	258	27	9C	13
R311	A	108	73	8B	15	R385	B	251	21	10C	13	R459	A	25	143	5E	5
R312	A	108	75	11B	15	R386	B	18	105	4B	5	R460	A	27	143	4E	5
R313	A	120	75	8D	15	R387	B	49	120	10A	5	R461	A	23	143	4E	5
R314	A	119	71	11D	15	R388	B	47	120	9A	5	R462	B	20	103	4C	5
R315	A	120	73	11D	15	R389	B	45	120	9A	5	R463	B	234	74	4B	12
R316	A	126	72	11C	15	R390	B	256	107	4B	10	R464	B	14	114	5B	5
R317	A	75	85	3B	15	R391	B	278	135	4B	8	R465	B	167	97	2A	9
R318	A	127	51	3C	16	R392	B	275	136	4B	8	R466	B	169	97	3A	9
R319	A	106	138	5E	6	R393	B	264	25	9B	13	R467	B	222	93	8A	9
R320	B	16	18	3C	2	R394	B	264	26	9B	13	R468	B	280	111	7B	10
R321	B	20	17	2C	2	R395	B	264	28	8B	13	R469	B	180	139	4B	7
R322	B	34	140	8B	5	R396	B	232	76	4B	12	R470	B	234	138	7B	7
R323	B	38	140	9B	5	R397	A	59	43	5E	3	R471	B	255	124	1B	8
R324	B	55	45	10B	3	R398	A	62	43	5E	3	R472	B	299	108	6B	8
R325	B	53	45	10B	3	R399	A	77	23	4E	3	R473	B	202	82	7A	11
R326	B	18	17	2B	2	R400	A	75	23	3E	3	R474	B	265	80	7A	12
R327	B	35	140	8B	5	R401	A	42	47	3E	4	R475	B	163	68	3A	11
R328	B	37	14	1E	6	R402	A	42	49	3E	4	R476	B	164	68	3A	11
R329	B	37	17	2E	6	R403	B	52	132	10C	5	R477	B	282	37	5B	13
R330	B	82	125	2D	6	R404	B	54	129	10C	5	R478	B	282	39	5B	13
R331	B	78	127	2D	6	R405	B	251	27	10C	13	R479	B	149	49	3D	17
R332	B	42	101	9B	2	R406	B	248	29	10C	13	R480	B	134	51	3A	17
R333	B	35	96	2C	5	R407	A	250	21	10D	13	R481	B	111	69	3A	17
R334	B	32	101	2C	5	R408	A	63	109	10B	17	R482	B	162	47	3B	17
R335	B	27	95	2C	5	R409	A	196	68	10E	17	R483	B	104	115	3B	6
R336	B	56	113	11B	5	R410	A	251	100	8E	17	R484	B	104	117	3B	6
R337	B	38	107	1C	5	R411	A	247	135	6E	17	R485	B	90	25	6C	3
R338	B	181	109	4B	9	R412	A	99	113	6C	17	R486	B	62	51	9C	3
R339	B	180	94	4C	9	R413	B	22	102	4C	5	R487	B	256	110	4C	10
R340	B	226	98	8A	9	R414	B	22	100	3C	5	R488	B	51	28	3B	3
R341	B	193	135	5C	7	R415	B	22	99	3C	5	R489	B	81	33	6B	3
R342	B	189	135	4C	7	R416	A	238	139	7C	7	R490	B	278	136	4C	8

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved



Benennung: EE IQ-CONVERTER
Designation: IQ-CONVERTER

Sprache:
Lang.: de

Blatt:
Sh.: 7 +

Aei:
C.I.: 04.05

Typ: SMIQ

Datum: 99-02-03

Abteilung: 1GPK

Name: BU

Sachnr.: 1084.9300.01 XY

Part No.:

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

ei. Kennz.						ei. Kennz.						ei. Kennz.					
Part	Seite	X	Y	Planq.	Bl.	Part	Seite	X	Y	Planq.	Bl.	Part	Seite	X	Y	Planq.	Bl.
				Sqr	Pg					Sqr	Pg					Sqr	Pg
R491	B	58	39	10B	3	R566	B	13	105	4C	5	R642	A	252	141	1F	8
R492	B	34	57	5B	4	R567	A	175	94	3D	9	R643	A	224	65	2F	12
R494	B	61	105	9D	5	R568	A	200	132	3D	7	R644	A	218	61	1F	12
R495	B	246	33	11C	13	R569	A	173	65	3D	11	R645	A	217	85	1E	12
R496	B	134	67	2D	16	R570	B	292	18	6C	13	R646	A	190	63	4F	11
R497	A	61	116	11E	5	R571	B	285	26	6B	13	R647	A	182	62	3F	11
R498	B	59	121	11C	5	R574	B	267	44	3C	13	R648	A	184	76	4E	11
R499	B	224	103	8B	9	R575	A	113	49	4D	16	R649	A	146	83	1F	11
R500	B	253	21	10C	13	R576	A	119	47	4E	16	R650	A	153	83	2F	11
R501	A	254	21	11E	13	R577	B	246	39	6B	17	R651	A	155	78	2E	11
R502	B	111	122	8C	6	R578	B	77	103	6C	17	R652	A	188	67	4E	11
R503	B	113	122	9C	6	R579	A	93	55	9D	17	R653	A	221	75	2E	12
R504	B	62	46	10B	3	R580	A	147	60	6E	17	R654	A	277	53	7D	13
R505	B	86	25	6B	3	R581	A	56	89	10A	17	R655	A	299	51	5E	13
R506	B	38	54	4B	4	R582	A	116	110	9C	6	R656	A	283	39	8E	13
R507	A	39	87	8D	2	R583	B	59	55	9C	3	R657	A	263	32	11D	13
R508	A	32	122	5F	5	R584	A	59	58	6F	3	R658	A	246	35	11C	13
R509	A	52	129	8D	5	R585	B	32	26	1C	3	R659	A	176	65	4D	11
R510	A	15	139	4E	5	R586	B	35	22	2C	3	R660	A	207	72	7C	11
R511	A	26	131	4F	5	R587	B	92	19	6C	3	R661	A	292	27	3D	13
R512	A	168	116	1F	9	R588	B	36	46	4C	4	R662	A	285	16	3F	13
R513	A	194	93	3F	9	R589	A	44	116	6E	5	R663	A	280	16	3E	13
R514	A	235	115	1F	10	R590	A	47	116	6E	5	R664	A	290	19	3F	13
R515	A	174	141	1F	7	R591	A	50	116	6E	5	R665	A	274	37	7E	13
R516	A	218	140	3F	7	R592	A	52	117	6E	5	R666	B	114	75	5B	14
R517	A	256	139	1F	8	R593	A	55	117	7E	5	R667	B	224	50	6E	14
R518	A	222	63	1F	12	R594	A	283	22	4E	13	R668	A	81	89	5B	15
R519	A	149	83	1F	11	R595	A	280	22	4E	13	R669	A	96	88	8B	15
R520	A	186	62	3F	11	R596	A	278	22	3E	13	R670	A	112	88	11B	15
R521	A	273	53	7C	13	R597	A	275	22	3E	13	R671	A	127	89	8D	15
R522	A	297	53	5E	13	R598	A	285	22	4E	13	R672	A	128	76	11D	15
R523	A	291	35	7D	13	R599	A	120	49	3E	16	R673	A	81	76	2B	15
R524	B	38	52	4C	4	R600	A	63	128	11D	5	R674	A	146	44	3B	16
R525	A	288	16	3F	13	R601	A	245	25	10D	13	R675	A	107	141	4F	6
R526	A	269	37	7E	13	R602	A	259	28	11D	13	R677	A	58	60	6F	3
R527	A	128	74	11C	15	R603	A	61	110	10B	17	R678	A	78	137	2F	6
R528	A	111	141	5F	6	R604	A	196	72	9E	17	R679	A	83	133	3F	6
R529	A	82	135	2F	6	R605	A	247	100	8E	17	R680	A	86	129	3E	6
R530	A	173	96	4D	9	R606	A	244	132	6E	17	R681	B	276	49	2D	13
R531	A	47	15	2F	3	R607	A	95	113	6C	17	R682	A	113	133	5E	6
R532	A	231	101	1D	10	R608	A	30	92	8E	2	R683	A	115	141	5F	6
R533	B	64	48	9B	3	R609	A	30	124	5F	5	R684	A	66	37	5E	3
R534	B	87	24	6C	3	R610	A	36	121	6F	5	R685	A	77	14	3E	3
R535	B	40	53	4C	4	R611	A	38	117	6E	5	R686	A	34	29	2E	3
R536	A	125	116	10D	6	R612	A	59	121	10D	5	R687	A	46	21	2E	3
R537	A	121	116	9D	6	R613	A	63	130	11E	5	R688	A	48	20	2F	3
R538	A	128	49	3D	16	R614	A	64	112	9D	5	R689	A	51	15	2F	3
R539	A	42	87	8D	2	R615	A	56	132	8E	5	R690	A	34	45	3E	4
R540	A	17	105	3E	5	R616	A	25	135	4E	5	R691	B	175	93	4D	9
R541	A	35	128	6E	5	R617	A	25	133	4F	5	R692	B	197	125	4D	7
R542	A	52	125	8D	5	R618	A	22	129	4F	5	R693	B	172	65	4D	11
R543	A	20	133	4E	5	R619	B	23	94	3C	5	R694	B	63	64	7E	3
R544	A	43	109	2D	5	R620	A	160	106	2E	9	R695	A	123	69	10D	15
R545	A	288	51	6E	13	R621	A	162	118	1F	9	R696	A	126	125	10E	6
R546	A	293	37	8D	13	R622	A	167	114	2F	9	R697	A	72	85	6B	15
R547	A	247	21	10E	13	R623	A	198	93	4F	9	R698	A	108	68	8B	15
R548	A	265	37	7E	13	R624	A	190	93	3F	9	R699	A	112	81	11B	15
R549	A	198	133	3D	7	R625	A	212	100	4E	9	R700	A	115	81	8D	15
R550	A	271	15	3E	13	R626	A	203	93	4E	9	R701	A	81	82	3B	15
R551	A	267	53	8C	13	R627	A	239	115	2F	10	R702	A	147	41	3B	16
R552	A	141	40	4A	16	R628	A	231	115	1F	10	R703	A	120	54	3D	16
R553	A	141	37	4B	16	R629	A	240	113	1E	10	R704	A	128	46	3E	16
R554	A	244	124	6E	17	R630	A	245	115	2E	10	R705	A	153	41	3A	16
R555	A	245	93	8E	17	R631	A	174	124	1E	7	R706	B	60	50	10C	3
R556	A	195	62	9E	17	R632	A	178	143	1F	7	R707	B	58	50	10C	3
R557	A	106	131	5E	6	R633	A	172	141	2F	7	R708	A	38	29	2E	3
R558	A	72	11	4D	3	R634	A	165	134	2E	7	R709	A	36	29	2E	3
R559	B	22	26	4B	2	R635	A	212	140	3F	7	R710	B	89	27	6C	3
R560	B	17	32	4C	2	R636	A	218	138	4F	7	R711	B	89	28	6C	3
R561	B	43	89	8B	2	R637	A	215	130	4E	7	R712	B	89	30	6C	3
R562	B	36	89	8C	2	R638	A	227	123	3E	7	R713	B	57	50	10C	3
R563	B	29	142	8B	5	R639	A	275	134	1E	8	R714	B	41	59	5C	4
R564	B	32	132	8C	5	R640	A	264	139	2E	8	R715	B	41	58	5C	4
R565	A	234	135	7D	7	R641	A	258	139	2F	8	R716	B	41	56	5C	4

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved.

	Benennung: EE IQ-CONVERTER		Sprache:	Blatt:	Aei:
	Designation: IQ-CONVERTER		Lang.: de	Sh.: 8 +	C.I.: 04.05
Typ: SMIQ	Datum: 99-02-03	Abteilung: 1GPK	Name: BU	Sachnr.: 1084.9300.01 XY	
Type: SMIQ		Date: 99-02-03	Dpt: 1GPK	Part No.: 1084.9300.01 XY	

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
R717	A	17	87	1E	5	R791	B	223	62	2C	12	V9	A	208	98	4E	9
R718	A	150	105	2E	9	R792	B	210	66	1C	12	V10	A	244	109	2E	10
R719	A	202	98	4E	9	R793	B	210	71	1C	12	V11	A	168	128	2E	7
R720	A	242	103	1E	10	R794	B	222	74	3B	12	V12	A	222	127	4E	7
R721	A	168	132	1E	7	R795	B	223	70	3C	12	V13	A	273	138	2E	8
R722	A	220	131	3E	7	R796	A	269	101	4E	10	V14	A	195	128	4D	7
R723	A	274	141	1E	8	R797	A	267	102	3E	10	V15	A	174	71	4D	11
R724	A	213	80	1E	12	R798	A	300	110	4E	8	V16	A	219	81	2E	12
R725	A	183	69	4E	11	R799	A	300	108	4E	8	V17	A	186	73	4E	11
R726	A	145	76	2E	11	R800	A	257	70	4E	12	V18	A	152	76	2E	11
R727	A	272	22	3E	13	R801	A	255	70	3E	12	V19	B	128	115	10C	6
R728	A	226	50	10D	14	R802	B	253	113	4B	10	V20	A	275	16	3E	13
R729	B	128	121	10B	6	R803	B	269	143	3B	8	V21	A	108	135	5E	6
R730	A	89	123	3E	6	R804	B	272	133	3B	8	V22	B	134	117	10B	6
R731	A	121	107	9D	6	R805	B	227	84	4A	12	V23	A	96	126	3E	6
R732	A	33	23	2E	3	R806	A	279	116	3F	10	V24	A	117	114	9D	6
R733	A	18	115	3E	5	R807	A	276	125	3F	8	V25	A	121	120	9E	6
R734	A	20	115	3E	5	R808	A	250	83	3F	12	V26	A	125	120	10E	6
R735	A	22	115	3E	5	R809	A	270	112	4E	10	V27	A	79	20	3E	3
R736	B	173	109	4B	9	R810	A	271	101	3E	10	V28	A	64	40	5E	3
R737	B	169	80	4B	11	R811	A	282	116	3F	10	V29	A	60	64	6E	3
R738	B	96	114	2C	6	R812	A	274	116	3F	10	V30	A	42	27	2E	3
R739	B	289	53	2B	13	R813	A	286	125	4E	8	V31	A	42	45	3E	4
R740	A	33	118	6E	5	R814	A	278	125	4F	8	V32	B	17	23	3B	2
R741	A	72	77	6B	15	R815	A	274	129	3F	8	V33	B	17	30	3C	2
R742	A	110	65	9B	15	R816	A	299	113	3E	8	V34	B	21	23	3B	2
R743	A	106	79	11B	15	R817	A	255	83	3F	12	V35	B	36	93	8C	2
R744	A	119	79	9D	15	R818	A	259	68	4E	12	V36	B	42	91	8B	2
R745	A	121	67	11D	15	R819	A	247	83	3F	12	V37	B	40	92	8B	2
R746	A	75	81	3B	15	R820	A	253	70	3E	12	V38	B	26	100	2C	5
R747	A	126	61	2D	16	R821	A	273	111	3E	10	V39	B	24	136	8B	5
R748	A	22	95	2E	5	R822	A	295	124	3E	8	V40	B	28	133	8C	5
R749	A	22	93	2E	5	R823	A	252	62	3E	12	V41	B	27	141	8B	5
R750	A	108	139	5E	6	R824	B	272	136	3C	8	V42	B	34	101	2C	5
R751	A	110	139	5E	6	R825	A	57	140	10D	5	V43	B	184	104	4B	9
R752	A	114	139	5E	6	R826	A	52	140	10C	5	V44	B	194	130	5B	7
R753	A	112	139	5E	6	R827	B	64	142	10E	5	V45	B	180	74	4B	11
R754	B	21	110	5C	5	R828	B	258	29	9D	13	V46	B	283	20	7C	13
R755	B	21	108	4C	5	R829	A	255	33	9D	13	V47	B	283	25	6B	13
R756	B	21	107	4C	5	R830	A	258	34	9E	13	V48	B	288	18	6C	13
R757	B	239	35	3D	14	R831	A	61	140	10D	5	V49	B	272	53	2C	13
R758	A	111	113	7C	17	R832	A	63	140	10E	5	V50	B	262	52	2D	13
R759	A	256	134	7E	17	R833	B	156	71	2C	11	V51	B	280	46	2A	13
R760	A	263	98	9E	17	R834	B	194	81	6B	11	V52	B	279	53	2C	13
R761	A	207	69	10E	17	R835	B	241	73	5B	12	V53	B	271	48	2C	13
R762	B	55	47	10B	3	R836	B	222	66	2C	12	V54	B	113	124	8C	6
R763	B	57	120	10B	5	R837	B	159	102	2C	9	V55	B	86	40	7B	3
R764	B	255	20	10C	13	R838	B	240	98	3C	10	V56	B	222	52	6E	14
R765	A	105	69	3C	17	R839	B	269	103	5C	10	V57	B	21	78	6C	2
R766	B	68	21	4C	3	R840	B	135	112	11B	6	V58	B	63	140	10D	5
R767	B	17	38	4C	2	U1	A	84	85	3E	15	V59	B	59	127	10C	5
R768	B	14	37	4C	2	U1	A	84	85	5B	15	V60	B	258	32	9D	13
R769	B	15	72	6C	2	U2	A	99	85	6E	15	V61	B	255	27	10C	13
R770	B	15	74	6C	2	U2	A	99	85	7B	15	V62	B	104	125	7D	6
R771	B	117	126	8C	6	U3	A	115	85	10B	15	V63	B	40	78	7C	4
R772	B	68	19	4C	3	U3	A	115	85	5E	15	V64	A	15	112	3E	5
R773	B	70	22	4C	3	U4	A	130	85	4E	15	V65	A	38	125	6E	5
R774	B	259	51	2D	13	U4	A	130	85	7D	15	V66	A	18	95	1E	5
R775	B	119	110	9B	6	U5	A	130	73	10D	15	V67	A	19	139	4E	5
R776	A	38	101	10D	2	U5	A	130	73	3E	15	V68	A	177	99	4D	9
R777	A	30	101	9D	2	U6	A	84	73	1E	15	V69	A	153	105	2E	9
R778	B	242	95	3C	10	U6	A	84	73	2B	15	V70	A	209	100	4E	9
R779	B	232	95	2C	10	U7	B	230	43	10D	14	V71	A	242	109	1E	10
R780	B	232	98	2C	10	U7	B	230	43	10D	14	V72	A	173	128	1E	7
R781	B	242	104	3D	10	U7	B	230	43	6F	14	V73	A	227	127	3E	7
R782	B	241	111	3D	10	U8	B	73	123	1D	6	V74	A	276	137	1E	8
R783	B	293	129	5C	8	V1	B	70	87	2F	15	V75	A	200	128	4D	7
R784	B	259	136	2C	8	V2	A	268	105	3E	10	V76	A	171	70	4D	11
R785	B	284	135	4C	8	V3	A	17	111	3E	5	V77	A	217	83	1E	12
R786	B	260	131	2C	8	V4	A	42	121	6E	5	V78	A	184	74	4E	11
R787	B	290	127	5C	8	V5	A	20	91	2E	5	V79	A	149	77	2E	11
R788	B	293	135	5C	8	V6	A	24	139	4E	5	V80	A	226	104	2D	10
R789	B	294	138	4D	8	V7	A	179	100	4D	9	V81	A	273	20	3E	13
R790	B	282	138	4C	8	V8	A	156	104	2E	9	V82	A	106	136	5E	6

ROHDE & SCHWARZ

Benennung: EE IQ-CONVERTER
Designation: IQ-CONVERTER

Sprache: de
Lang.: de

Blatt: 9 +
Sh.: 9 +
Aei: C.I.: 04.05

Typ: SMIQ

Datum: 99-02-03
Date: 99-02-03

Abteilung: 1GPK
Dpt: 1GPK

Name: BU
Name: BU

Sachnr.: 1084.9300.01 XY
Part No.: 1084.9300.01 XY

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bf. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bf. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bf. Pg
V83	A	241	130	7D	7	V139	B	189	66	6C	11	V195	A	252	127	7E	17
V84	A	90	130	3E	6	V140	B	257	77	6C	12	V196	A	257	91	8E	17
V85	A	118	111	9D	6	V141	B	162	85	4C	11	V197	A	203	62	10E	17
V86	A	74	19	3E	3	V142	B	269	15	8B	13	V198	B	81	17	5C	3
V87	A	59	39	5E	3	V143	B	89	141	4C	6	V199	B	75	20	4C	3
V88	A	55	64	6E	3	V144	B	91	130	4D	6	V200	B	42	42	4C	4
V89	A	37	26	2E	3	V145	B	264	39	4C	13	V201	B	49	45	3C	4
V90	A	38	50	3E	4	V146	B	38	29	2B	3	V202	B	127	110	10C	6
V91	B	163	105	2B	9	V147	B	20	106	4C	5	V205	A	256	66	3E	12
V92	B	168	105	3B	9	V148	B	61	48	10B	3	V206	A	270	105	3E	10
V93	B	174	105	3B	9	V149	B	87	27	6C	3	V207	A	295	115	3E	8
V94	B	169	76	3B	11	V150	B	40	56	5C	4	V208	A	253	67	3E	12
V95	B	164	76	3B	11	V151	A	128	43	4E	16	V209	B	239	113	3D	10
V96	B	158	76	2B	11	V152	A	108	54	4D	16	V210	B	257	138	2C	8
V97	A	206	78	7C	11	V153	B	17	63	5C	2	V211	B	225	66	3C	12
V98	A	282	30	3D	13	V154	B	15	63	5C	2	V212	B	239	98	2C	10
V99	A	235	104	2D	10	V155	B	15	65	5C	2	V213	B	295	129	5B	8
V100	B	93	123	4C	6	V156	B	17	65	5C	2	V214	B	291	135	5C	8
V101	B	93	118	3C	6	V157	B	19	45	5C	2	V215	B	285	135	4C	8
V102	B	93	112	2C	6	V158	B	17	45	5C	2	V216	B	219	68	2C	12
V103	A	239	135	7C	7	V159	B	17	44	4C	2	V217	B	215	71	2C	12
V104	A	201	76	7C	11	V160	B	19	44	4C	2	V218	B	234	98	2C	10
V105	A	282	28	3D	13	V161	B	205	103	6B	9	W22	B	40	141	5B	1
V106	B	44	126	9C	5	V162	B	200	103	6B	9	X1	B	257	41	4B	13
V107	B	20	122	6B	5	V163	B	193	103	5B	9	X2	B	48	100	10B	2
V108	B	267	19	8C	13	V164	B	157	102	2C	9	X3	B	122	120	9C	6
V109	B	98	139	5C	6	V165	B	267	103	5C	10	X4	B	51	110	11B	5
V110	B	46	116	7E	5	V166	B	149	134	2C	7	X5	B	227	94	8A	9
V111	B	51	116	7E	5	V167	B	155	134	2C	7	X6	B	240	139	8B	7
V112	B	276	13	4E	13	V168	B	202	133	5C	7	X7	B	203	68	8A	11
V113	B	281	13	4E	13	V169	B	209	133	6C	7	X22A	B	40	141	9B	5
V114	B	140	46	5C	16	V170	B	253	132	1C	8	X22B	B	295	28	6C	13
V115	B	136	46	4C	16	V171	B	162	131	2B	7	X220	B	189	13	1D	14
V116	A	63	121	11D	5	V172	B	217	130	6B	7	X221	B	22	13	2B	2
V117	A	264	26	11D	13	V173	B	148	75	1C	11	X223	B	37	10	1E	6
V118	A	130	126	10E	6	V174	B	153	72	2C	11	X227	B	250	13	11C	13
V119	B	16	93	2E	5	V175	B	186	76	5B	11	Z1	B	239	52	5A	17
V120	B	15	116	3E	5	V176	B	190	79	5B	11	Z2	B	202	54	5D	17
V121	B	231	101	2B	10	V177	B	241	71	5B	12	Z3	B	239	47	5A	17
V122	B	243	129	8B	7	V178	B	245	71	5B	12	Z4	B	116	97	5B	17
V123	B	208	72	8B	11	V179	B	249	71	6B	12	Z5	B	98	60	8D	17
V124	B	98	122	3E	6	V180	B	83	48	8C	3	Z6	B	171	29	2B	17
V125	A	291	124	4E	8	V181	B	76	48	8C	3	Z7	B	70	90	9A	17
V126	A	103	112	6C	17	V182	B	70	48	9C	3	Z8	B	70	95	9B	17
V127	A	249	133	7E	17	V183	B	43	75	6C	4	Z9	B	161	29	2D	17
V128	A	255	100	8E	17	V184	B	42	70	6C	4	Z10	B	182	29	2B	14
V129	A	198	70	10E	17	V185	B	41	64	6C	4	Z11	B	201	22	2B	14
V130	A	59	104	10B	17	V186	B	21	96	3C	5	Z12	B	201	27	2B	14
V131	B	27	118	5C	5	V187	B	152	102	1C	9	Z13	B	192	29	2C	14
V132	B	35	123	9C	5	V188	B	262	103	5C	10	Z14	B	187	29	2D	14
V133	B	168	117	4C	9	V189	B	254	130	1B	8	Z15	B	177	29	2E	14
V134	B	208	111	6B	9	V190	B	253	130	1B	8	Z16	B	156	29	2B	17
V135	B	267	117	6C	10	V191	B	78	27	5C	3	Z17	B	136	29	2C	17
V136	B	168	139	2C	7	V192	B	45	51	3C	4	Z18	B	116	29	2C	17
V137	B	220	140	6C	7	V193	A	105	107	7C	17						
V138	B	286	127	5C	8	V194	A	55	97	11B	17						

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

	Benennung: EE IQ-CONVERTER Designation: IQ-CONVERTER	Sprache: de Lang.:	Blatt: 10 - Sh.:	Aei: 04.05 C.I.:
	Typ: SMIQ Type:	Datum: 99-02-03 Date:	Abteilung: 1GPK Dpt.:	Name: BU Name:



ROHDE & SCHWARZ

Service Documents

Module IQ Modulator and Option B47

1084.9800.08

Contents

7 Testing and Repair of the Module	5
7.1 Function Description	5
7.1.1 LF Generator	5
7.1.2 Output Unit	6
7.1.2.1 Amplitude Modulator and Preset	6
7.1.2.2 Output Amplifier	6
7.1.2.3 Down-conversion	6
7.1.2.4 LO Synthesis	7
7.1.2.5 Level Conditioning	7
7.1.3 Vector Modulator	7
7.1.3.1 LO Conditioning and Modulator	7
7.1.3.2 Level Attenuation	8
7.1.3.3 Pulse Modulation	8
7.1.3.4 Power Ramping	8
7.1.3.5 IQ Detector	9
7.1.3.6 IQ Modulation Path	9
7.1.3.7 Option B47 (WCDMA Filter)	10
7.2 Test Instruments and Utilities	10
7.3 Troubleshooting	11
7.4 Testing and Adjustment	13
7.4.1 Data Transmission and Power Supply	13
7.4.2 Reference and Supply Voltages	13
7.4.2.1 Adjusting 10-V Reference	13
7.4.2.2 Checking the ± 5.5 -V Supply	13
7.4.3 LF Generator	13
7.4.3.1 Reference Voltages	13
7.4.3.2 Offset Adjustment	13
7.4.3.3 Frequency Setting	14
7.4.3.4 Amplitude Setting	14
7.4.3.5 Frequency Response	14
7.4.4 Output Unit	14
7.4.4.1 Reference ± 6 V	14
7.4.4.2 Channel Switch	14
7.4.4.3 Setting Modulation Depth	15
7.4.4.4 Monitoring External AC	15
7.4.4.5 Setting Preset	15
7.4.4.6 Level Setting	15
7.4.4.7 2.4-GHz PLL	16
7.4.4.8 2.4-GHz LO	16
7.4.4.9 Level Characteristic	16
7.4.4.10 Output Detector and Detector Adjustment	17
7.4.4.11 Broadband Noise Output Unit	18
7.4.5 IQ-Modulator	19
7.4.5.1 Reference Voltages	19
7.4.5.2 Setting Quadrature	19
7.4.5.3 Setting Imbalance	19
7.4.5.4 Setting Leakage	19
7.4.5.5 Offset Compensation	20
7.4.5.6 IQ-Change and Calibration Switch	20
7.4.5.7 IQ Modulation Path	20
7.4.5.8 300-MHz LO	21
7.4.5.9 Power Ramping Control	21
7.4.5.10 Power Ramping Linearity	21
7.4.5.11 IQ300 Output - Level Attenuation	21
7.4.5.12 Level Attenuation Control	22
7.4.5.13 Pulse Modulation Control	23
7.4.5.14 IQ-Detector and Detector Adjustment	23

7.4.5.15 IQAM	24
7.4.5.16 Frequency Response IQ Modulator	24
7.4.5.17 Broadband Noise IQ Modulator	25
7.4.6 Board Interrupt	25
7.4.7 Diagnosis	27
7.4.8 Operating Points of Amplifier Stages	28
7.5 Removal and Assembly	28
7.6 External Interface	29

Part list
 Coordinates list
 Circuit diagram
 Layout diagram

7. Testing and Repair of the Module

7.1 Function Description

The IQ Modulator module is divided into the three function units LF Generator, vector modulator and output unit.

The LF Generator is provided as internal modulation signal for FM/PM or AM, but it is also provided at a separate output 'LF out'.

The IQ modulator generates a vector-modulated 300-MHz signal which is required on the IQ converter board for synthesis of a vector-modulated RF carrier. Power ramping, which is necessary for digital mobile radio networks is accomplished by means of an additional amplitude modulator of large bandwidth. Another level control element with a digital control signal allows for fast level attenuation of up to 70 dB for alternative level setting in the time slots. Pulse modulation with an ON/OFF ratio > 80dB is implemented by means of two fast GaAs switches.

The output unit comprises the complete level conditioning and the AM modulator for the output frequency range up to 3.3 GHz. The frequency range below 450 MHz in CW mode or 750 MHz in IQ mode is generated by down-conversion using a 2.4-GHz signal. In CW mode, output signals above 3040 MHz are obtained by up-conversion with the 300-MHz signal of the vector modulator.

7.1.1 LF Generator

The LF Generator supplies a sinewave signal with a frequency which can be set between 0.1 Hz and 1 MHz. The signal is provided at the 'INT1' line with an amplitude of 1 V. In addition, the level from 1 mV to 4V peak can be selected at the output 'LFOUT'.

A Direct Digital Synthesis is the nucleus of the LF generator. The reference frequency of the DDS is 50 MHz. The increment can be set by a 32-bit value. The integrated DA converter provides a 10-bit resolution. All internal registers are assigned '0' by means of a reset component. With power off, the component operates in 'sleep mode' in order to reduce power consumption.

The DDS component supplies a sinewave with a constant amplitude of 2V peak-to-peak and a dc offset of 1V. The summing module N11 adds a constant voltage to the output signal to compensate for the offset. Offset adjustment is performed via R124. The output signal N11 is used as internal modulation signal on 'INT1'.

Level conditioning for the LF output 'LFOUT' follows using the 12-bit DA converter N41. The output amplifier N10 increases the voltage range to 4V peak.

7.1.2 Output Unit

7.1.2.1 Amplitude Modulator and Preset

The output signal 'IQFIL' of the IQ converter is first applied to the level preset element V9. Thus, the AM modulator can operate at its ideal operating point independent of the level set. The control voltage 'V_PRESET' which is set via the 8-bit converter U1 is obtained by the internal preset calibration depending on the output frequency and the output level. A difference amplifier V38/V40 with the current source V39 provides for a constant current through the pin diodes in IQ-Off and ALC-OFF modes and thus for a temperature-stabilized attenuation value.

The RF signal passes to the AM modulator V3/V4/V8 via the broadband amplifier V102. Similar to the preset element, this signal is controlled via a difference amplifier V41/V56 with the current source V42 to ensure high temperature-stability with clamped level. The insertion loss of the modulator is compensated by the RF amplifier N4.

7.1.2.2 Output Amplifier

The GaAs-switches D55 and D56 route the RF signal either directly to the output amplifier or to the RF input of the down-converter to generate the frequency range below 450 MHz. The pin diodes V108/V110/V170/V171 improve crosstalk in the down-converter mode to better 80dB. They are controlled via the operational amplifier N6.

The 3-stage output amplifier V144/V103/V104 increases the level up to 19 dBm. The working point of the GaAs-Fets is stabilized by the current source V1/V2/V6 for the drain current and a control for the drain voltage through N1/N2.

A harmonic filter which follows the output amplifier V104 improves the harmonics suppression for output frequencies above 1.8 GHz.

A directional coupler consisting of the resistors R511, R902 and R922, applies part of the output power to the peak rectifier V46. The latter is accordingly broadband to cover the complete frequency range. A second charging capacitor C549 can be switched on in addition for output frequencies below 5 MHz. The detector characteristic is linearized using the log module N39, N40 and N41.

The balancing transformer T1 decouples the output power at the floating gate of the transformer.

7.1.2.3 Down-conversion

The frequency range below 450 MHz is obtained on the output unit by down-conversion with a 2.4-GHz LO signal. The GaAs switch D56 passes the modulated RF signal to the RF gate of the diode mixer U9. The IF amplifier V148 amplifies the IF signal by approx. 15dB. A succeeding filter suppresses unwanted mixing products such as $3*LO-2*RF$, and the LO frequency

7.1.2.4 LO Synthesis

The LO signal for mixing is derived from the 600-MHz signal of the step synthesis in the 2.4-GHz PLL consisting of the VCO V130, L108, C452 and V111, the divider :4 D44, the phase detector and the PI control N14.

A power divider R291/R294/R293 at the VCO output decouples part of the power and applies it to the LO gate of the mixer U9 via the LO amplifier stages V154, V147 and V99. The control element for the pin diodes is used to adjust the LO level to approx. 17 dBm on the mixer. With mixer active, the amplifier stages V154, V147 and V99 are switched off via their supply voltage.

7.1.2.5 Level Conditioning

The command value of level control is given by the 12-bit converter 'LEVEL' D43. The controller of the level control loop N35 allows for selection between two control bandwidths (switch D15). The narrow bandwidth of approx. 5kHz is used in CW mode, the broad one of approx. 20 kHz with AM modulation. For carrier frequencies below 5 MHz the control is always switched slow.

Electronic level blanking is accomplished by the offset current applied via R316 and switched by the signal 'Klemm_N'. The level is thus prevented from increasing too much after level gaps occurring with change of frequency.

In IQ and ALC OFF modes, the switch D15 and the control signal 'ALC_ON' are used to switch over the controller N35 to the AF amplifier. In addition, the measured value of the level detector must be disconnected via the switch D8.

AM is performed using an externally applied modulation signal 'EXT1' or internally by means of the 'INT1' signal of the LF generator. Two-tone modulation is achieved by simultaneous modulation with both signals. Either ac coupling (coupling capacitor C606/C607) or dc coupling may be selected for the externally applied modulation signal. Selection is made via switches D9 and D10.

A window comparator N42 monitors the modulation signal with AM with ac coupling to the rated value of 1V peak and supplies an interrupt which is triggered if the deviation from the rated value exceeds 3%. The interrupt triggers a warning message in the display.

The modulation depth is set by the 12-bit DA converter 'AMOD' D42. Its output signal is added to a fixed dc reference 'AM-6V' and is used as reference for the DA converter 'LEVEL' D43 of level setting.

7.1.3 Vector Modulator

7.1.3.1 LO Conditioning and Modulator

The vector modulator operates at a fixed frequency of 300 MHz. The 300-MHz signal is obtained from the 600-MHz reference of step synthesis by means of division (:2 divider N28). A 3-stage LO driver V82, V81 and V83 amplifies the signal at the divider output to approx. 25 dBm and passes it to the 90° power divider B1.

The latter generates two 300-MHz carriers with a phase relation of 90° . The phase relation may be varied by $\pm 20^\circ$ via a tunable phase shifter V123/V125/V122/V124 in the I-path or L50, V127/V126/V128/V129 in the Q-path, each.

The 300-MHz signals are amplified to approx. 17 dBm via the LO drivers V75 and V77 and applied to the LO input of the I-mixer U11 or of the Q-mixer U12. The modulated signal is first amplified at the RF output of the modulation mixer by means of the amplifiers N46 and N47 and then subject to a harmonic filter. The addition of the modulated signals of the I and Q paths is carried out by the 0° -power summer U4.

7.1.3.2 Level Attenuation

After the addition, the modulated signal is applied to two pin diode attenuators V50, V52 and V53, V71 which are separated by an amplifier N45. The attenuators allow for fast level attenuation by 0 to 70 dB. (transient < 15 μ s)

With digital modulations, the control elements are used for fast level attenuation in particular time slots (control via input 'X240 A10' 'LEVATT_MOD') and as electronic attenuator in the operating mode 'LEVEL LEVEL ATTENUATOR MODE ELECTRONIC'.

In the operating mode without level attenuation, two current sources V78 and V76 ensure a constant current of approx. 1mA through the pin diodes. Potentiometer R2 permits to adjust the level at the output X242 by varying this current. N37 is out of operation in this case.

In the operating mode with level attenuation, a current depending on the voltage V_LEVATT is set by means of N37. The DA converter D46 'LEVATT' permits to vary the voltage V_LEVATT for setting the attenuation. To determine the converter setting for a desired attenuation value, the IQ detector is used in conjunction with an internally executed calibration routine. (UTILITIES CALIB LEV ATT)

The 0-dB setting for the operating mode with level attenuation is adjusted using potentiometer R1111 such that a DA converter value of approx. 3500 is obtained. The NTC resistor R1129 is used for compensation of the temperature-dependent attenuation of the control elements.

Switchover between impressed current and controlled current is effected by means of switches D12 and D13, both control elements being switched at the same time.

7.1.3.3 Pulse Modulation

Pulse modulation is enabled by switches D50 und D51. The conversion of the TTL signal to the control signal of the GaAs switches (0V <-> -6V) is made using transistors V134, V136, V158, V159. The inverter D7 permits to invert the pulse polarity.

7.1.3.4 Power Ramping

Linear power ramping is performed by means of the two analog multipliers in the I and Q path.

To increase the dynamic range of the assembly to >80dB, the switch to the IQ detector D28 is actuated with approx. -40dB attenuation. A comparator

N30 derives the control signal for the switch D28 from the command value of N24.

The linearity of the burst modulator up to an attenuation of approx. 30 dB is adjusted via Poti R807.

With switch D5 the burst control input can be switched off and the command value be replaced by an internally generated reference voltage.

Following the switch D28, the 300-MHz signal is passed via a harmonic filter and a power divider to the two outputs 'IQAUX' X241 and 'IQ300' X242. The signal 'IQAUX' provides the signal at the rear panel of the instrument, while 'IQ300' passes the signal to the 'IQ-Converter' module.

7.1.3.5 IQ Detector

The GaAs switch D28 allows for routing the signal of the IQ modulator to the level detector V106. The linearization circuit consists of the opamps N25 and N32.

The IQ detector is used for calibrating the IQ modulator and for determination of the level-attenuation setting.

7.1.3.6 IQ Modulation Path

The I and/or Q-modulation signals are applied to the 50- Ω termination R370/R369 and/or R372/R371 via the GaAs switches D37 and D54. The switches allow for applying known dc voltages to the modulation inputs for calibration purposes, for operating modes broadband-AM, pulse modulation, and for frequencies above 3040 MHz.

The voltages available are $\pm 1V$ for calibration of the IQ imbalance, $\pm 0.707V$ for the quadrature offset and 0V for residual carrier calibration. Two analog multiplexers D16 and D17 allow for selection of the desired calibration reference. The opamp N19 measures the voltages at D17 and D16 and supplies the required current for the 50- Ω load.

The video multiplexer D40 allows for exchanging the I-channel and the Q-channel. This is necessary, since both sidebands occurring with up-conversion in the IQ converter or down-conversion in the output unit are used to avoid spurious. The exchange may also be made via the firmware.

One analog multiplier D1 in the I-channel and one (D2) in the Q-channel are provided for individual level setting. Two 8-bit DA converters 'ILEV' U2 and 'QLEV' U3 ensure the setting range of approx. $\pm 25\%$. Definite variation of the IQ imbalance via the firmware is thus possible as well as adjustment during IQ calibration.

Switching the AM-reference input to the ILev or QLev entries of the multipliers by means of D11 allows an AM during IQ-operation (IQAM). Since power ramping is also implemented with the aid of the multipliers, power ramping and IQAM exclude each other.

The DC offset applied to the Y2 input of the two multipliers permits to compensate for offsets produced ahead of the multiplier. The twofold 12-bit DA converter D61 is available for this purpose. The required calibration is performed internally with the vector modulator calibration.

The dc offset fed at the Z-input of the two multipliers compensates the residual carrier or it is set via the firmware. To this end, two 12-bit

DA converters 'IOFFSET' D45 and 'QOFFSET' D48 are available. With broadband AM, the residual carrier at the I-channel is set to 50% via the DA converter 'IOFFSET'.

The third adjustment quantity, the quadrature, is set using the 12-bit converter 'IQPHASE' D47 and influences directly the phase shifters in the RF path of the LO signal preceding the modulation mixers for I and Q. The opamp N18 is used to derive two negative-phase sequence tuning voltages from the converter output voltage, one of them being passed to the phase shifter in the Q-path, consisting of V126 to V129. The other one is passed to the phase shifter in the I-path which consists of V122 to V125.

7.1.3.7 Option B47 (IQ Filter)

If the module is enabled for Option B47, the I and Q signals are filtered after the analog multipliers either by a 850-kHz lowpass, 2.5-MHz lowpass, 5-MHz lowpass or 70-MHz lowpass (IQ_FILTER 850kHz, 2.5MHz, 5MHz or OFF). The two paths are switched by means of FETs which are driven by D59 and N4.

7.2 Test Instruments and Utilities

- Spectrum analyzer FSEA or FSEB
- Level meter NRV with Z51
- DC/AC voltmeter UDS5
- Oscilloscope BOS
- Two DC voltage sources
- AF signal generator AFGU
- SMA attenuator pads 6dB and 10dB
- Signal generator SMHU

<u>Error description</u>	<u>Remedy</u>
LF Generator Frequency Error	7.4.3.3 Frequency Setting
LF Generator Level Error	7.4.2.1 Adjusting 10-V Reference 7.4.3.2 Offset Adjustment 7.4.3.4 Amplitude Setting
PLL2.4GHz Out Of Synchronisation	7.4.4.7 2.4-GHz PLL
ALC Error CW <450MHz	7.4.4.1 Reference Voltage $\pm 6V$ 7.4.4.5 Setting Preset 7.4.4.6 Level Setting 7.4.4.7 2.4-GHz PLL 7.4.4.8 2.4-GHz LO 7.4.4.9 Level Characteristic 7.4.4.10 Output Detector
ALC Error CW >450, <3040MHz	7.4.4.1 Reference Voltages 7.4.4.5 Setting Preset 7.4.4.6 Level Setting 7.4.4.9 Level Characteristic 7.4.4.10 Output Detector
ALC Error CW >3040MHz	7.4.4.1 Reference Voltages 7.4.4.5 Setting Preset 7.4.4.6 Level setting 7.4.4.9 Level Characteristic 7.4.4.10 Output Detector 7.4.5 IQ Modulator
Level Linearity Attenuator Fixed	7.4.4.10 Output Detector
Attenuator Electronic	7.4.5 IQ Modulator 7.4.5.11 Adjustment Level Att. 7.4.5.12 Control Level Att.
AM Error	7.4.4.2 Channel Switch 7.4.4.3 Setting Modulation Depth 7.4.4.5 Setting Preset 7.4.4.10 Output Detector
AM Error with vector modulation	7.4.5.5 Offset Compensation 7.4.5.15 IQAM
Insufficient Harmonic Suppression	7.4.4.5 Setting Preset 7.4.8 Operating Points of Amplifier Stages
Preset Calibration Aborted	7.4.4.5 Setting Preset 7.4.4.6 Level Setting 7.4.4.9 Level Characteristic

Error description

Remedy

	7.4.4.10 Output Detector	
Vector Error Too High	7.4.4.9 Level Characteristic	
	7.4.5.2 Setting Quadrature	
	7.4.5.3 Setting Imbalance	
	7.4.5.4 Setting Leakage	
	7.4.5.8 300-MHz LO	
	7.4.5.16 Frequency Response IQ Modulator	
IQ Calibration Aborted	7.4.5.1 Reference Voltages	
	7.4.5.2 Setting Quadrature	
	7.4.5.3 Setting Imbalance	
	7.4.5.4 Setting Leakage	
	7.4.5.6 IQ-Change and Cal. Switch	
	7.4.5.8 300-MHz LO	
	7.4.5.11 Output IQ300	
	7.4.5.14 IQ Detector	
	7.4.5.16 Frequency Response IQ Modulator	
	Residual Carrier Too High	7.4.5.4 Setting Leakage
		7.4.5.5 Offset Compensation
7.4.5.14 IQ Detector		
Error with Power Ramping	7.4.5.9 Power Ramping Control	
	7.4.5.10 Power Ramping Linearity	
Error with Level Attenuation	7.4.5.12 Level Attenuation Control	
	7.4.5.11 Level Attenuation Tuning	
Pulse Modulation	7.4.5.13 Pulse Modulation Control	
Broadband Noise	7.4.4.11 Broadband Noise Outp. Unit	
	7.4.5.16 Freq. Resp. IQ Modulator	
	7.4.5.17 Broadband Noise IQ Mod.	

7.4 Testing and Adjustment

All measured values given without tolerances are recommended values. Voltages given without further information mean dc voltages.

At the beginning of each section, the instrument or module is assumed to be in the PRESET state.

The service kit contains an adaptor to make the module accessible. The adaptor is plugged into the chassis instead of the module and the RF connections at the bottom are connected. Then, the module can be plugged into the adaptor.

In the following sections, test and measurement points are quoted which are not available for the modules of the first series. In these cases the description of the test point according to the components is useful.

7.4.1 Data Transmission and Power Supply

According to the instrument standard, the module is controlled via a serial interface using the SERBUS-D component. Settings and associated data are given in the Section 'Digital Interfaces'.

The rated power consumptions of the respective supply voltages can be looked up in the Section 'External Interfaces'.

7.4.2 Reference and Supply Voltages

7.4.2.1 Adjusting 10-V Reference

- Connect dc voltmeter to P29
- Adjust to 10V $\pm 0.1\%$ using potentiometer P516
- Setting:
UTILITIES DIAG TPOINT STATE ON
UTILITIES DIAG TPOINT TEST POINT 2101
- Check diagnosis voltage to 10V $\pm 2\%$

7.4.2.2 Checking the ± 5.5 -V Supply

- Connect dc voltmeter to P23
- Check the supply voltage to +5.5V ± 0.1 V
- Connect dc voltmeter to P24
- Check the supply voltage to -5.5V ± 0.1 V

7.4.3 LF Generator

7.4.3.1 Reference Voltages

- Connect dc voltmeter to P14
- Check the supply voltage to 1.5V $\pm 0.2\%$

7.4.3.2 Offset Adjustment

- Connect dc voltmeter to P50 (INT1 and LFINT)
- Setting:
LF_OUTPUT STATE ON
LF_OUTPUT LFGEN_FREQ 1kHz
LF_OUTPUT VOLTAGE 1V
- Adjust the offset voltage to ± 5 mV using potentiometer R124

7.4.3.3 Frequency Setting

- Connect oscilloscope to reference crystal G1 pin3
- Check frequency to 50MHz (TTL)
- Connect frequency counter to LF
- Setting:
 - LF_OUTPUT STATE ON
 - LF_OUTPUT LFGEN_FREQ 1MHz
 - LF_OUTPUT VOLTAGE 1V
- Check the LF frequency to 1MHz $\pm 10^{-5}$

7.4.3.4 Amplitude Setting

- Connect ac voltmeter to LF
- Setting:
 - LF_OUTPUT STATE ON
 - LF_OUTPUT LFGEN_FREQ 1kHz
 - LF_OUTPUT VOLTAGE 4mV, 40mV, 400mV, 4V
- Check peak amplitude to 4mV, 40mV, 400mV, 4V $\pm(1\%+1mV)$
- Connect ac voltmeter to P50 (INT1 or LF-INT)
- Check peak amplitude to 1V $\pm 1\%$

7.4.3.5 Frequency Response

- Connect ac voltmeter to LF
- Setting:
 - LF_OUTPUT STATE ON
 - LF_OUTPUT LFGEN_FREQ 10Hz to 1MHz
 - LF_OUTPUT VOLTAGE 1V
- Reference measurement at 10Hz
- Check level to 0.4dB deviation up to 100kHz, 3dB to 1MHz
- Connect ac voltmeter to P50 (INT1 or LF-INT)
- Setting:
 - LF_OUTPUT LFGEN_FREQ 10Hz to 1MHz
- Reference measurement at 10Hz
- Check level to 0.4dB deviation up to 100kHz, 3dB to 1MHz

7.4.4 Output Unit

7.4.4.1 Reference $\pm 6V$

- Connect dc voltmeter to P26
- Check the voltage to +6V $\pm 0.2\%$
- Connect dc voltmeter to P25
- Check the voltage to -6V $\pm 0.2\%$

7.4.4.2 Channel Switch

- Apply 1V dc to 'EXT1'
- Setting:
 - ANALOG_MOD AM AM_SOURCE_EXT EXT1
 - ANALOG_MOD AM AM_EXT_COUPLING DC
- Connect dc voltmeter to P11
- Check dc voltage to 6V $\pm 2\%$
- Setting:
 - ANALOG_MOD AM AM_SOURCE_EXT EXT1
 - ANALOG_MOD AM AM_EXT_COUPLING AC
- Check dc voltage to 0V ± 10 mV

- Apply 1kHz/1V peak to 'EXT1'
- Connect ac voltmeter to P11
- Check ac voltage to 6V peak $\pm 2\%$

- Disconnect voltage applied to 'EXT1'
- Setting:
 - ANALOG_MOD AM AM_SOURCE_INT INT
 - ANALOG_MOD LFGEN_FREQ 2kHz
- Check ac voltage to 6V peak $\pm 2\%$

7.4.4.3 Setting Modulation Depth

- Connect ac voltmeter to P10
- Setting:
 - ANALOG_MOD AM AM_SOURCE_INT INT
 - ANALOG_MOD AM LFGEN_FREQ 1kHz
 - ANALOG_MOD AM_DEPTH 100%, 50%, 10%, 5%, 1%
- Check ac voltage to 6V, 3V, 600mV, 300mV, 60mV peak $\pm 5\%$

7.4.4.4 Monitoring External AC

- Connect LF to 'EXT1' via T-junction
- Connect ac voltmeter to T-junction
- Setting:
 - LF_OUTPUT STATE ON
 - LF_OUTPUT LFGEN_FREQ 1kHz
 - LF_OUTPUT VOLTAGE 1V
 - ANALOG_MOD AM AM_SOURCE_EXT EXT1
 - ANALOG_MOD AM AM_EXT_COUPLING AC
- Measure voltage at ac voltmeter
- Set LF-generator level to 1V peak
- Connect dc voltmeter to P1 or P3
- Check voltage at P1 and P3 to 0V

- Set LF-generator level to 1.03V peak
- Check voltage at P1 to 5V

- Set LF-generator level to 0.97V peak
- Check voltage at P3 to 5V

7.4.4.5 Setting Preset

- Setting:
 - FREQUENCY 1GHz
 - LEVEL 13dBm
 - UTILITIES DIAG TPOINT STATE ON
 - UTILITIES DIAG TPOINT TEST POINT 2108
- Check diagnosis voltage to 2.3V to 4.6V

- Connect dc voltmeter to P54 (C214)
- Check the DC voltage to 1.0 to 2.8V

7.4.4.6 Level Setting

- Connect dc voltmeter to P13
- Setting:
 - FREQUENCY 1GHz
 - LEVEL 16dBm
 - LEVEL LEVEL ATTENUATOR_MODE FIXED
 - UTILITIES DIAG TPOINT STATE ON
 - UTILITIES DIAG TPOINT TEST POINT 2110
- Check dc voltage to -4.2V $\pm 1.3V$
- Note measured voltage as Vref

- Setting: LEVEL 10, 4, -2, -8, -14
- Check dc voltage at P13 to Vref/2, /4, /8, /16, /32, ±5%

7.4.4.7 2.4-GHz PLL

- Setting: UTILITIES DIAG TPOINT STATE ON
UTILITIES DIAG TPOINT TEST POINT 2103
- Check diagnosis voltage to 50 to 250mV
- Setting: UTILITIES DIAG TPOINT TEST POINT 2105
- Check diagnosis voltage to 30 to 100mV
- Setting: UTILITIES DIAG TPOINT TEST POINT 2106
- Check diagnosis voltage to 80 to 180mV
- Disconnect cable at X246 (REF600)
- Setting: UTILITIES DIAG TPOINT TEST POINT 2104
- Check diagnosis voltage to -.9 to -.3V
- Connect cable at X246 (REF600)
- Disconnect jumper X8
- Check diagnosis voltage to 21.5 to 23.5V
- Plug on jumper X8
- Check diagnosis voltage to 3 to 12V

7.4.4.8 2.4-GHz LO

- Setting: FREQUENCY 1000MHz
- Check diagnosis voltage to ±10mV
- Setting: UTILITIES DIAG TPOINT STATE ON
UTILITIES DIAG TPOINT TEST POINT 2107
FREQUENCY 100MHz
- Check diagnosis voltage to 180mV - 400mV

Adjustment of the LO-level must be carried out only after a sufficient settling time in the mixer mode (frequency < 450 MHz) has elapsed and after the operating temperature has been reached. The adjustment must be carried out with the module opened and the heat dissipator removed (section N only).

- Setting: FREQUENCY 100MHz
- Connect level meter to X3
- Adjust level to -4.5dB ±.1dB using poti R968

7.4.4.9 Level Characteristic

- Disconnect jumper X6
- Connect first dc-voltage source to X6.2
- Apply 4V dc
- Disconnect jumper X9
- Connect second dc-voltage source to X9.2
- Apply 6V dc
- Setting: LEVEL 16dBm
UTILITIES DIAG TPOINT STATE ON
UTILITIES DIAG TPOINT TEST POINT 2113
FREQUENCY 450, 500 to 3300MHz
- Check diagnosis voltage to >5V

- Setting: UTILITIES DIAG TPOINT TEST POINT 2111
VECTOR_MOD STATE ON
FREQUENCY 49; 99 to 749MHz
- Apply 0.5-V dc voltage at X244 'IMOD'
- Check diagnosis voltage to >100mV(f≥200MHz), >40mV(f<200MHz)
- Connect power meter to X249
- Setting: FREQUENCY 50, 100 to 3300MHz
VECTOR_MOD STATE OFF
- Check output level to >18dBm
- Apply signal FIQFIL to X247 via 16-dB attenuator
- Setting: FREQUENCY 50, 100 to 3300MHz
- Check output level to >7dBm (f < 2 GHz) or <16dBm (f > 2GHz)
- Apply 2.4V dc to first dc-source(X6.2)
- Setting: FREQUENCY 50, 100 to 3300MHz
- Check output level to <3dBm

7.4.4.10 Output Detector and Detector Adjustment

- Connect dc voltmeter to P57 or P58
- Check dc voltage to +15V or -10V ±2%

The text below describes how to test the detector linearity. This test must be performed exclusively with board cover screwed.

- Connect power meter to X249
- Setting: LEVEL 5.1dBm
LEVEL LEVEL ATTENUATOR_MODE FIXED
FREQUENCY 5, 500, 1000, 1500 to 3000MHz
- Measure the output level at X249
- Switch power meter to ΔdB, 5.1-dBm level being the reference, respectively
- Setting: LEVEL 10.1, 5.1, 0.1, -4.9 to -14.9dBm
- Check rated level to ±.2dB for ≥0dBm, ±.4dB for -5dBm, ±.6dB for -10dBm, ±.8dB for -15dBm
- Setting: LEVEL 10dBm
FREQUENCY 1500MHz
- Measure the output level at X249
- Switch power meter to ΔdB, 10-dBm level being the reference, respectively
- Setting: FREQUENCY 5, 500, 1000, 1500 to 3000, 3300MHz
- Check frequency response to better 4dB

The adjustment of the output detector must not be performed with board uncovered and only after a sufficiently long warm-up time and at correct operating temperature. Remove the label on the cover above the cut-out for the poti R125 to perform the adjustment. Subsequent to adjustment, replace label, perform a preset calibration and update the level correction table.

- Connect power meter to X249
- Setting: LEVEL 5.1dBm
LEVEL LEVEL ATTENUATOR_MODE FIXED
LEVEL 5dBm
FREQUENCY 1500MHz
- Measure output level at X249

- Switch power meter to Δ dB, 5.1-dBm level being reference
- Setting: LEVEL -15dBm
- Adjust to -20.0 dB \pm .1dB attenuation using poti R125

7.4.4.11 Broadband Noise Output Unit

- Unscrew connection from IQCON X227 to IQMOD X247
- Terminate IQCON X227 with 50 Ω
- Connect SMHU to input FIQFIL X247
- Setting SMHU: FREQUENCY see table below
LEVEL 5.0 dBm
- Setting SMIQ: FREQUENCY see table below
LEVEL 5.1 dBm
LEVEL ALC STATE ON
- Connect spectrum analyzer to RF socket SMIQ
- Check output level to 5.1dBm \pm 1dB and store as 'REF'
- Setting SMIQ: LEVEL ALC STATE OFF
- Setting SMHU: LEVEL OFF
- Setting FSE: CF see table below
REF LEVEL -50dBm
INPUT ATTENUATION 0dB
SPAN 1kHz
RBW 2kHz
VBW 5Hz
MARKER NOISE
- Measure noise level in dBm/Hz
- Check the signal-to-noise ratio (S/N) = 'REF' noise level to the table values below

FREQUENCY SMIQ in MHz	0.3	1	50- 450	500	1000	1500	2000	2500	3300
FREQUENCY SMHU in MHz	2400.3	2401	2450- 2850	500	1000	1500	2000	2500	3300
FREQUENCY FSE in MHz	0.3	1	50- 450	501	1001	1501	2001	2501	3301
S/N in dBc/Hz without Opt. B47	115	120	135	142	142	142	142	142	142
S/N in dBc/Hz with Opt. B47	115	120	135	143	144	146	147	147	147

7.4.5 IQ Modulator

7.4.5.1 Reference Voltages

- Connect dc voltmeter to P51 (V67 Pin1) or P52 (V112 Pin1)
- Check dc voltage to +10V or -10V \pm .3%

- Connect dc voltmeter to P37, P38, P39 and P40, successively
- Check dc voltage to 1V, +.707V, -.707V, -1V \pm .5%

- Connect dc voltmeter to P20
- Check dc voltage to -7.5V \pm 3%

7.4.5.2 Setting Quadrature

- Connect dc voltmeter to P42 (R98) or P63 (R97)
- Setting:
VECTOR_MOD STATE ON
VECTOR_MOD IMPAIRMENT STATE ON
VECTOR_MOD QUADRATUR_OFFSET 0°
- Check dc voltages to 7.5V \pm 2.5V and store under 'Ref97' and 'Ref98'

- Setting:
VECTOR_MOD QUADRATUR_OFFSET +10°
- Check dc voltage at R97 to 'Ref97' +1.25V \pm .15V
- Check dc voltage at R98 to 'Ref98' -1.25V \pm .15V

- Setting:
VECTOR_MOD QUADRATUR_OFFSET -10°
- Check dc voltage at R97 to 'Ref97' -1.25V \pm .15V
- Check dc voltage at R98 to 'Ref98' +1.25V \pm .15V

7.4.5.3 Setting Imbalance

- Connect dc voltmeter to P35 or P36
- Setting:
VECTOR_MOD STATE ON
VECTOR_MOD IMPAIRMENT STATE ON
VECTOR_MOD IMBALANCE 0%
- Check the dc voltages to 1.0V \pm .1V and store under 'Ref35' and 'Ref36'

- Setting:
VECTOR_MOD IMBALANCE +10%
- Check dc voltage at P35 to 'Ref35' +0.1V \pm 25mV
- Check dc voltage at P36 to 'Ref36' -0.1V \pm 25mV

- Setting:
VECTOR_MOD IMBALANCE -10%
- Check dc voltage at P35 to 'Ref35' -0.1V \pm 25mV
- Check dc voltage at P36 to 'Ref36' +0.1V \pm 25mV

7.4.5.4 Setting Leakage

- Connect dc voltmeter to P32 or P41
- Setting:
VECTOR_MOD STATE ON
VECTOR_MOD IMPAIRMENT STATE ON
VECTOR_MOD LEAKAGE 0%
- Check the dc voltages to 0V \pm 100mV and store under 'Ref32' or 'Ref41'

- Setting:
VECTOR_MOD LEAKAGE 50%
- Check dc voltage at P32 to 'Ref32' +250mV \pm 50mV

- Setting: VECTOR_MOD LEAKAGE 50%
VEKTOR_MOD IQ_SWAP ON
- Check dc voltage at P32 to 'Ref32' +250mV ±50mV

7.4.5.5 Offset Compensation

- Fasten module cover with screws during calibration
- Setting: VECTOR MOD STATE ON
- Disconnect cable X244/X245
- Start calibration Vector Mod
- Measure dc voltage at D1 and D2 Pin1 and Pin2.
Voltage difference between Pin1 and Pin2 smaller than 2mV

7.4.5.6 IQ Change and Calibration Switch

- Connect dc voltmeter to P15 or P16
- Apply +0.5V dc to X244 'I-MOD'
- Apply 0V dc to X245 'Q-Mod'
- Setting: VEKTOR_MOD STATE ON
VECTOR_MOD IMPAIRMENT STATE ON
FREQUENCY 2 GHz
- Check dc voltage at P15 to -250mV ±50mV
- Check dc voltage at P16 to 0mV ±50mV
- Setting: VEKTOR_MOD IQ_SWAP ON
- Check dc voltage at P15 to 0mV ±50mV
- Check dc voltage at P16 to -250mV ±50mV
- Apply +0V dc to X244 'I-MOD'
- Apply +0.5V dc to X245 'Q-MOD'
- Setting: VEKTOR_MOD STATE OFF
- Check dc voltage at P15 to -250mV ±50mV
- Check dc voltage at P16 to 0mV ±50mV

7.4.5.7 IQ Modulation Path

- Setting: VECTOR_MOD STATE ON
- Connect dc voltmeter to X10.1 or X11.2
- Apply +0.5V dc to X244 'IMOD' or X245 'QMOD'
- Check dc voltage at X10.1 or X11.2 to -220mV ±50mV
- Apply -0.5V dc to X244 'IMOD' or X245 'QMOD'
- Check dc voltage at X10.1 or X11.2 to -220mV ±50mV
- Reposition jumper X10 or X11 to X1 or X2
- Connect oscilloscope to X1 or X2
- Apply 1MHz/0.5V peak (terminal voltage) to X244 'IMOD' or X245 'QMOD'
- Check voltage at X10.1 or X11.2 to 155mV ±35mV rms and store under 'RefX1' or 'RefX2'
- Apply 25MHz/0.5V peak (terminal voltage) to X244 'IMOD' or X245 'QMOD'
- Check voltage at X1 to 'RefX1' ±.5dB
- Check voltage at X2 to 'RefX2' ±.5dB

7.4.5.8 300-MHz LO

- Setting: UTILITIES DIAG TPOINT STATE ON
UTILITIES DIAG TPOINT TEST POINT 2114
- Check diagnosis voltage to $800\text{mV} \pm 100\text{mV}$

- Connect level meter to X4 and/or X5
- Check level to $-9\text{dBm} \pm 3\text{dB}$

- Setting: UTILITIES DIAG TPOINT TEST POINT 2118 and/or 2119
- Check diagnosis voltage to $360\text{mV} \pm 70\text{mV}$

7.4.5.9 Power Ramping Control

- Connect dc voltmeter to X7
- Check voltage to $-1.0\text{V} \pm 0.5\text{V}$

- Connect dc voltmeter to P35 or P36
- Check voltage to $1\text{mV} \pm 0.2\text{mV}$

- Setting: VECTOR MOD STATE ON
VECTOR MOD POWER RAMP CONTROL EXT_ANALog
- Apply +0V dc to X243 'BURST CONTROL_MOD'
- Connect dc voltmeter to X7
- Check voltage to $2\text{mV} \pm 2\text{mV}$

- Connect dc voltmeter to P35 or P36
- Check voltage to $-0\text{V} \pm 0.1\text{V}$

- Connect dc voltmeter to P64 (N30 Pin 1)
- Check voltage to approx. 5V

- Connect +1V dc to X243 'BURST CONTROL_MOD'
- Check voltage to 0V

7.4.5.10 Power Ramping Linearity

- Setting: VEKTOR MOD STATE ON
POWER RAMP CONTROL EXT-ANALOG
- Connect +0.5V dc to X245 'QMOD'
- Connect +1.000V $\pm 1\text{mV}$ dc to X243 'BURST CONTROL_MOD'
- Connect spectrum analyzer to X242 'IQ300'
- Check level to $5\text{dBm} \pm 0.5\text{dB}$ and store under 'Ref'

Linearity check:

- Set dc voltage at X243 to $500 \pm 5\text{mV}$; $250 \pm 1\text{mV}$; $100 \pm 1\text{mV}$; $31.6 \pm 0.5\text{mV}$
- Check level to 'Ref' $-6\text{dB} \pm 0.5\text{dB}$; $-12\text{dB} \pm 0.5\text{dB}$; $-20\text{dB} \pm 0.5\text{dB}$; $-30\text{dB} \pm 1\text{dB}$

- Linearity adjustment
- Set dc voltage X243 to $50.1\text{mV} \pm 0.5\text{mV}$
- Adjust level at X242 'IQ300' to ('Ref' -26dB) $\pm 0.1\text{dB}$ using poti R807.

7.4.5.11 IQ300 Output - Level Attenuation

The adjustment described below must be performed after a sufficiently long warm-up time and at correct operating temperature. Calibration of the vector modulator must be performed just before the level adjustment.

- Level adjustment

- Setting: UTILITIES CALIB VECTOR MOD CALIB
ANALOG_MOD PULSE SOURCE EXT
ANALOG_MOD PULSE POLARITY INV
- Connect level meter to X242 'IQ300'
- Check/adjust level to $-5\text{dBm} \pm 0.1\text{dB}$
- Check harmonic suppression to better than -60dBc

- Adjustment of level attenuation

- Setting: ANALOG_MOD PULSE SOURCE OFF
LEVEL LEVEL ATTENUATOR MODE ELECTRONIC
- Solder R109 (open connection to N43)
- Connect DC voltage source to R109
- Apply -8.5V DC
- Connect level meter to X242 'IQ300'
- Adjust level at X242 'IQ300' to $-5.0\text{dBm} \pm 0.1\text{dB}$ using poti R1111
- Remove DC voltage source and solder in R109

7.4.5.12 Level Attenuation Control

- Setting: FREQUENCY 1000 MHZ
LEVEL 10dBm
UTILITIES CALIB LEV ATT CALIBRATE
ANALOG_MOD PULSE SOURCE EXT
ANALOG_MOD PULSE POLARITY INV
UTILITIES DIAG TPOINT STATE ON
UTILITIES DIAG TPOINT TEST POINT 2123
- Check diagnosis voltage to $0\text{mV} \pm 50\text{mV}$ and store as ULEVATT
- Connect dc voltmeter to P17 and/or P59
- Check dc voltage to $0.60\text{V} \pm 0.1\text{V}$ and store value under U59
- Check level at X242 'IQ300' to $-5.0\text{dBm} \pm 1\text{dB}$
- Setting: ANALOG MOD PULSE SOURCE OFF
- Check dc voltage at P17 and/or P59 to $\text{ULEVATT} \pm 5\text{mV}$
- Check level at X242 to smaller than -75dBm
- Setting: LEVEL LEVEL ATTENUATOR MODE ELECTRONIC
- Check diagnosis voltage (TP2123) to $2*U59 \pm 100\text{mV}$
- Check voltage difference between P43, P17 and P59 to smaller than 2mV
- Check level at X242 'IQ300' to $-5.0\text{dBm} \pm 1\text{dB}$

7.4.5.13 Pulse Modulation Control

- Setting: ANALOG MOD PULSE SOURCE EXT
ANALOG MOD PULSE POLARITY NORM
- Connect dc voltmeter to D50 and/or D51 pin 4
- Check voltage to $0V \pm 0.5V$
- Connect dc voltmeter to D50 and/or D51 pin 5
- Check voltage to $-6.5V \pm 1V$
- Setting: ANALOG MOD PULSE POLARITY INV
- Connect dc voltmeter to D50 and/or D51 pin 4
- Check voltage to $-6.5V \pm 0.5V$
- Connect dc voltmeter to D50 or D51 pin 5
- Check voltage to $0V \pm 0.5V$

7.4.5.14 IQ Detector and Detector Adjustment

- Setting: LEVEL 0dBm
UTILITIES DIAG TPOINT STATE ON
UTILITIES DIAG TPOINT TEST POINT 2121
- Check diagnosis voltage to below 50mV
- Solder out R85 and apply +5V DC to D57 pin4
- Setting: LEVEL LEVEL ATTENUATOR MODE ELECTRONIC
- Check diagnosis voltage to 8.4V to 12.3V

Testing and adjusting the level linearity of the IQ detector as described below must not be performed with board uncovered and only after a sufficiently long warm-up time and at correct operating temperature.

- Synchronize analyzer and SMIQ with one another (connect 10-MHz references)
- Setting: LEVEL 0dBm
UTILITIES REF_OSC SOURCE EXT
UTILITIES CALIB LEV ATT CALIBRATE
LEVEL LEVEL ATTENUATOR MODE ELECTRONIC
- Apply 0V DC to D57 pin4
- Connect spectrum analyzer to X242 'IQ300'
- Check level to $-5dBm \pm 0.5dB$ and store under 'Ref'
- Apply +5V DC to D57 pin4
- Measure diagnosis voltage (TP2121) and store under 'RefDiag'
- Apply 0V DC to D57 pin4
- Set level to -40dBm and set the output signal at X242 'IQ300' to 'Ref - 40.0dB' by varying the level.
- Apply +5V DC to D57 pin4
- Adjust diagnosis voltage (TP2121) to 'RefDiag' -40dB using poti R930
- Repeat procedure for attenuations of 5 to 35 dB in 5-dB steps and check deviation of diagnosis voltage to below 0.4 dB (take care not to change the adjustment!!)
- Solder R85 in again.
- After a change of the adjustment the IQ detector must be recalibrated (SMIQ level correction program: IQ detector calibration).

7.4.5.15 IQAM

- Setting: VECTOR_MOD STATE ON
ANALOG MOD AM AM DEPTH 80%
ANALOG MOD AM AM SOURCE INT INT
ANALOG MOD AM LFGEN FREQ 20.000 kHz
- Apply +5-V dc voltage to X244 'IMOD'
- Connect AC voltmeter to P35 and/or P36
- Check voltage to 275mV ±20mV (rms value)
- Connect spectrum analyzer to X242 'IQ300'
- Check carrier to -11dBm ±1dB and store under 'carrier'
- Check 300MHz ±20kHz sidebands to ('carrier'-8dB) ±0.5dB
- Check harmonic sidebands to below ('carrier'-40dB)

7.4.5.16 Frequency Response IQ Modulator

-without option or with option B47 with IQ FILTER OFF

- Setting: VECTOR_MOD STATE ON
- Connect spectrum analyzer to X242 'IQ300'
- Connect 30 MHz 0.5V_p to X244 'IMOD' or X245 'QMOD'
- Check the 270-MHz signal at X242 to -11dBm ± 1dB and store under 'REF'
- Check the 330-MHz signal at X242 to 'REF' ± 1dB
- Sweep frequency at 'IMOD' and/or 'QMOD' from 0 to 30MHz
- Check frequency response < 1dB

- with Option B47 with IQ FILTER 850kHz

- Setting: VECTOR_MOD STATE ON
VECTOR_MOD IQ_FILTER 850kHz
- Apply signal of 0.1, 0.3, 0.5, 0.7, 1.0 and 2.0MHz and 0.5V_p to 'IMOD' or 'QMOD'
- Connect spectrum analyzer to X242 'IQ300'
- Check reference value at 300.1MHz to -11dBm ± 1dB and store under 'REF'
- Check frequency response at 'IQ300 referred to 'REF'

Frequency/MHz	300.3	300.5	300.7	301	302
Nom. value/dB	-0.1	-0.15	-0.3	-5	-40
Tolerance/dB	±0.1	±0.1	±0.2	+1/-3	±3

- with Option B47 with IQ FILTER 2.5MHz

- Setting: VECTOR_MOD STATE ON
VECTOR_MOD IQ_FILTER 2.5MHz
- Apply signal of 0.25, 0.75, 1.5, 2, 3 and 5MHz and 0.5V_p to 'IMOD' and/or 'QMOD'
- Connect spectrum analyzer to X242 'IQ300'
- Check reference value at 300.25MHz to -11dBm ± 1dB and store under 'REF'
- Check frequency response at 'IQ300 referred to 'REF'

Frequency/MHz	300.75	301.5	302	303	305
Nom. value/dB	-0.25	-0.45	-0.55	-5	-32
Tolerance/dB	±0.1	±0.1	±0.2	+1/-3	±5

- with Option B47 with IQ FILTER 5Hz

- Setting: VECTOR_MOD STATE ON
VECTOR_MOD IQ_FILTER 5MHz
- Apply signal of 0.5, 1.5, 3, 4, 6 and 10MHz and 0.5V_p to 'IMOD' or 'QMOD'
- Connect spectrum analyzer to X242 'IQ300'
- Check reference value at 300.25MHz to -11dBm ± 1dB and store under 'REF'
- Check frequency response at 'IQ300' referred to 'REF'

Frequency/MHz	301.5	303	304	306	310
Nom. value/dB	-0.3	-0.2	-0.35	-7	-39
Tolerance/dB	±0.1	±0.1	±0.1	+1/-3	±3

7.4.5.17 Broadband Noise IQ Modulator

- Setting: FREQUENCY 3.1GHz
- Connect spectrum analyzer to X242 'IQ300'
- Check the 300-MHz signal to -5.0dBm ± 1dB and store under 'REF'

- Setting: VECTOR_MOD STATE ON
VECTOR_MOD CALIBRATE
VECTOR_MOD IQ_FILTER 2.5MHz (nur bei Option B47)
- Check the 300-MHz signal to < -55dBm

- Setting FSE: CF 305 MHz
REF LEVEL -50dBm
INPUT ATTENUATION 0dB
SPAN 1kHz
RBW 2kHz
VBW 5Hz
MARKER NOISE
- Measure noise level at 305MHz in dBm/Hz
(With noise levels below -150dBm/Hz the measured value of the FSE should be corrected by the inherent noise of the analyzer!!)
- Check the signal-to-noise ratio = 'REF' - noise level to greater than 139dBc/Hz (without Option B47)
greater than 148dBc/Hz (with Option B47)

7.4.6 Board Interrupt

- Setting: FREQUENCY 1GHz
- Disconnect signal 'REF600' from X246
- Press the ERROR key
- Error message: Code 224, 2.4GHZ LO LOOP UNLOCKED

- Reconnect signal 'REF600'
- Error message: none

- Unplug jumper X8
- Error message: Code 224, 2.4GHZ LO LOOP UNLOCKED

- Plug in jumper X8 again
- Disconnect signal 'FIQFIL' from X247
- Error message: Code 110, OUTPUT UNLEVELED

- Apply signal 'FIQFIL' again
- Setting: ANALOG_MOD AM AM_SOURCE_EXT EXT1
ANALOG_MOD AM AM_EXT_COUPLING AC
- Apply 1kHz/1V peak to 'EXT1'
- Press the ERROR key
- Error message: none

- Apply 1kHz/1.04V peak to 'EXT1'
- Error message: Code 152, INPUT VOLTAGE OUT OF RANGE;EXT1 TOO HIGH

- Apply 1kHz/0.96V peak to 'EXT1'
- Error message: Code 153, INPUT VOLTAGE OUT OF RANGE;EXT1 TOO LOW

7.4.7 Diagnosis

The board contains 24 RF and dc test points in all. They are selected via the 'UTILITIES DIAG TPOINT POINT 21??' menu. The first two digits relate to the 'IQMOD' (21) board, the subsequent two digits are provided to number the diagnostic points.

IR=Supplies board interrupt, DF=divider factor, War=waiting time
OF=Offset measurement, MIN=Minimum, MAX=Maximum

Diagnostic point	Test point	I R	MIN [V]	MAX [V]	TF	WA R ms	O F
2100 D_OFFSET	Reference 1k Ω		-.01	+0.01	1	1	
2101 D_REF10V	10-V reference voltage		9.8	10.2	3	1	X
2102 D_LFGEN	Output level LF generator		-1.02	+1.02	3	1	
2103 D_REF600	Level 600-MHz reference for 2.4-GHz PLL		.05	.18	1		
2104 D_TUN2G4	Tuning voltage 2.4GHz VCO	X	3	18	5	1	
2105 D_VCO2G4	Level 2G4 VCO		0.03	.10	1	1	
2106 D_PHIDET	Level 600MHz Reference signal for 2.4-GHz PLL		.05	.18	1	1	
2107 D_LO2G4	LO level down converter on, (off)		.2, (-.02)	.4, (+.02)	1	1	
2108 D_PRESET	Tuning voltage Preset element		2.3	4.5	3	1	
2109 D_AMOD	Tuning voltage AM modulator	X	.02	6	3	3	
2110 D_REFAM	AM reference signal		-6	0	3	1	
2111 D_CONVRT	Level IF path down converter on, (off)		.005, (-1mV)	.1, (+1mV)	1	1	
2112 D_SWITCH	Level subsequent to AM modulator		.005	.4	1	1	
2113 D_DETOUT	Output detector output amplifier		.05	6	3	1	
2114 D_REF300	300-MHz level for IQ modulator		.6	1.0	1	1	
2115 D_IQOUT	Output level IQ modulator		0	.3	1	1	
2116 D_IMOD	Level modulation input I path		-.5	+0.5	2	1	
2117 D_QMOD	Level modulation input Q path		-.5	+0.5	2	1	
2118 D_ILO	Level LO I path		.2	.6	1	1	
2119 D_QLO	Level LO Q path		.2	.6	1	1	
2120 D_PHI	Control voltage phase shifter		3.5	13	3	1	
2121 D_IQCAL	Calibration detector IQ modulator		0	12.5	3	5	X
2122 D_BURST	Control voltage burst element		-4	-0.5	3	1	
2123 D_LEVATT	Tuning voltage level attenuation elements		0	1.5	3	1	

7.4.8

Operating Points of Amplifier Stages

The table below lists the operating points for the RF amplifiers of the module, respectively. Tolerances from 10% to 20% may occur and do not indicate any error. The data given always relate to the dc operating point without any RF signal being applied.

Amplifier Designation	Operating point	
	Drain / collector current	Drain / collector voltage
V82	50mA	5.0V
V81	60mA	5.0V
V83	130mA	8.0V
V75	90mA	9.5V
V77	90mA	9.5V
N46	55-100mA	4.5V
N47	55-100mA	4.5V
N45	55-100mA	4.5V
N44	55-100mA	4.5V
N49	85mA	5.0V
V80	90mA	9.5V
V102	90mA	6.0V
N38	60-100mA	3.0V
V148	70mA	4.0V
V144	70mA	4.5V
V103	120mA	7.0V
V104	135mA	7.3V
V111	30mA	-5.5V
V145	60mA	4.5V
V146	60mA	4.5V
V154	60mA	5.5V
V147	60mA	5.5V
V99	75mA	6.5V

7.5

Removal and Assembly

After opening the instrument, unlocking the board and disconnecting the RF connections at X241 to X249, the module can be removed from its slot. The screening covers of the board are screwed in the conventional way. When operating the instrument with open screening cover, make sure to close the resonator chamber M using an appropriate test cover.

7.6

External Interface

Pin	Name	Input/ Output	Origin/ Destination	Specified range	Signal description
X240.A1	BLANK	Input	A3, FRO X31.34	HCT-Level	Level blanking
X240.A2	UREFAM	Output	A500, IQ6G X500.2	0 to 12V	AM command value
X240.A3	LFOUT	Output	A3, FRO LF	0 to 4V peak, .1Hz to 1MHz	Output AF generator
X240.A4	EXT1	Input	A3, FRO EXT	0 to 1V Spitze	External modulation signal
X240.A5	EXT2				not used
X240.A6	INT1	Output	Option FMOD	0 to 1V Spitze	Internal modulation signal
X240.A7	Ground				
X240.A8	PULSE	Input	Rückwand	HCT level	Pulse modulation
X240.A9	CODAM	Input	DDS	0 to 1V peak	DSYN AM signal
X240.A10	LEV ATT_MOD	Input	MCOD	HCT level	Level attenuation
X240.A11	Ground				
X240.A12	SERBUS-CLK	Input	A3, FRO, X31.40	HCT level	Serbus Clock
X240.A13	Ground				
X240.A14	SERBUS-OUT	Output	A3, FRO, X31.39	HCT level	Serbus data
X240.A15	SERBUS-IN	Input	A3, FRO, X31.39	HCT level	Serbus data
X240.A16	SERBUS-SYNC	Input	A3, FRO, X31.37	HCT level	Serbus Sync
X240.A17	SERBUS-INT	Output	A3, FRO, X31.38	HCT level	Serbus Interrupt
X240.A18	Reset-P	Input	A3, FRO, X31.28	HCT level	Serbus Reset
X240.A19	DIAG-5V	Output	A3, FRO, X31.44	-5V to +5V	Diagnosis
X240.A20	VA15-P	Input	A2, POWS	14.85 to 15.75V 600mV	15V power supply
X240.A21	Ground				
X240.A22	VA24-P	Input	A2, POWS	23.75 to 25.25V 200mA	24V power supply
X240.A23	Ground				
X240.A24	VA15-P	Input	A2, POWS	14.85 to 15.75V 600mA	15V power supply
X240.A25	Ground				
X240.A26	VA7.5-P	Input	A2, POWS	7.45 to 7.95V 450mA	7.5V power supply
X240.A27	Ground				
X240.A28	VD5-P	Input	A2, POWS	5.15 to 5.25V 140mA	5V digital power supply
X240.A29	Ground				
X240.A30	VA15-N	Input	A2, POWS	-15.75.-14.85V 300mA	-15V power supply
X240.A31	Ground				
X240.A32	VA7.5-P	Input	A2, POWS	7.45 to 7.95V 450mA	7.5V power supply
X241	IQAUX	Output	Rear panel	300MHz/-10dBm	Vector-modulated carrier rear panel
X242	IQ300	Output	A220, IQCON X223	300MHz/-5dBm	Vector-modulated carrier IQCON
X243	BURST_CTRL_MOD	Input	Rear panel	0 to 1V	Control signal power ramping
X244	I_MOD	Input	A3, FRO I_MOD	-0.5 to +0.5V 0 to 30MHz	Modulation input I
X245	Q_MOD	Input	A3, FRO	-0.5 to +0.5V	Modulation input Q

Pin	Name	Input/ Output	Origin/ Destination	Specified range	Signal description
			Q_MOD	0 to 30MHz	
X246	REF600	Input	A7, REFSTEP X77	600MHz/13dBm	Reference 600MHz
X247	FIQFIL	Input	A220, IQCON X227	450 to 3300MHz/ 4dBm	Vector-modulated signal
X249	FIQOUT	Output	A15, ATT X2	.3 to 3300MHz -20 to 19dBm	Output signal


**Schalteillisten
numerisch geordnet**

**Part lists
in numerical order**

**Listes des pièces détachées
par numéros de référence**

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
	XX VARIANTENERKLAERUNG IDENTIFICATION OF MODELS				
B1	ER SCPQ-400 2WEG-L.TEILER 2WAY POWER DIVIDER	1085.1649.00	MINI-CIRCU	SCPQ-400	
C1	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C2	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C3	CC 3,3NF+-1% 50V NPO 1206 SMD-CERAMIC CAPACITOR	0010.2970.00	MURATA	GRM42-6COG332F50PT	
C4	CC 3,3NF+-1% 50V NPO 1206 SMD-CERAMIC CAPACITOR	0010.2970.00	MURATA	GRM42-6COG332F50PT	
C5	CC 5,6PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C6	CC 5,6PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C7	CC 1,5PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT	
C8	CC 5,6PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C9	CC 1,5PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT	
C10	CC 5,6PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C11	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C12	CC 5,6PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C15	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR	
C16	CC 5,6PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C17	CC 5,6PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C18	CC 1,5PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT	
C19	CC 5,6PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C20	CC 4,7PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C21	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C22	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C23	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C24	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C25	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C28	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C29	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C30	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C33	CC 1,0PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C34	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C35	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C38	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C39	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C40	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C41	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C44	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C47	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C48	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	


Für diese Unterlage behalten
Wir uns alle Rechte vor.

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	1+

95.0026-0693

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Manufacturer	Designation	contained in
C49	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C50	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C51	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C57	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C58	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C59	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C60	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C61	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C62	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C63	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C64	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C67	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C68	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C69	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C69	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NUR VAR/ONLY MOD: 02	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C69	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NUR VAR/ONLY MOD: 04	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C69	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NUR VAR/ONLY MOD: 06	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C69	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR NUR VAR/ONLY MOD: 08	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C70	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C50OPT*	
C71	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C83	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C84	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C85	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C86	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39C0G***B50ZPT	
C87	CE 4,7UF +-10% 25V 7343 TANTALUM CHIP CAPACITOR	CE 0007.7230.00	SPRAGUE	293D475X9035D2W	
C88	CE 4,7UF +-10% 25V 7343 TANTALUM CHIP CAPACITOR	CE 0007.7230.00	SPRAGUE	293D475X9035D2W	
C89	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C90	CC 8,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4550.00	MURATA	GRM39C0G***B50ZPT	
C91	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C99	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39C0G***F50ZPT	
C100	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C107	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C108	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C109	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C110	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C111	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C119	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C120	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	


1GPK	887 3PLU	ÄI	Datum Date	Schnittteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	2+	

6309-9700-03

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C123	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C124	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C125	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C126	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C127	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C128	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C129	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C130	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C131	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C132	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C133	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C134	CC 270PF+-10% 50VHDK 0603 SMD CERAMIC CAPACITOR	CC 1097.6370.00	VITRAMON	VJ0603Y***KXAT	
C135	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C136	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C137	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C138	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C139	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C140	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C141	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..145 C146	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C147	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C148	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C149	CE 10UF +-10% 25V 7343 TANTALUM SMD-CAPACITOR	CE 0007.7246.00	SPRAGUE	293D 106 X9 025 D2W	
C150	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C151	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C152	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C153	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..156 C157	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C158	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C159	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..161 C162	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT	
C163	CE 10UF +-10% 10V 6032 TANTALUM CHIP CAPACITOR	CE 0007.7281.00	SPRAGUE	293D-106X9 016 C2W	
C164	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..167 C168	CC 2,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8291.00	MURATA	GRM39COG***B50ZPT	
C169	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C170	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
..173 C174	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C175	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C176	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	3+

wir uns alle Rechte vor.

Kennz. Comp. No.	Bezeichnung Designation	Sachnummer Stock No.	Fabrikant Manufacturer	Bezeichnung Designation	Bezeichnung Designation
C177	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C178	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C180	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C181	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C182	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C183	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C184	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C185	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C186	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
C187	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C188	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C189	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C190	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C191	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C192	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C193	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C194	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C199	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C200	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C201	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C202	CE 10UF +-10% 10V 6032 TANTALUM CHIP CAPACITOR	CE 0007.7281.00	SPRAGUE	293D-106X9 016 C2W	
C203	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C204	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C205	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT	
C206	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT	
C207	CE 10UF +-10% 10V 6032 TANTALUM CHIP CAPACITOR	CE 0007.7281.00	SPRAGUE	293D-106X9 016 C2W	
C208	CC 27PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0010.9323.00	MURATA	GRM39COG***F50ZPT	
C209	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C210	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C211	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C212	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C213	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C214	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C215	CC 10PF+-1% 50V COG 0603 SMD-CERAMIC CAPACITOR	CC 0008.2183.00	AVX	0603 5J 100 FAW TR	
C216	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C217	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C218	CC 3,3NF+-1% 50V NPO 1206 SMD-CERAMIC CAPACITOR	0010.2970.00	MURATA	GRM42-6COG332F50PT	
C219	CC 3,3NF+-1% 50V NPO 1206 SMD-CERAMIC CAPACITOR	0010.2970.00	MURATA	GRM42-6COG332F50PT	
C220	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C221	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	


1GPK	887 3PLU	Ai	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	4+

0026-0693

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C222	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C223	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C224	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
..228 C229	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C230	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C231	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C232	CC 22ONF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C233	CC 22OPF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C234	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C235	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C236	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
C237	CE 10UF +-10% 10V 6032 TANTALUM CHIP CAPACITOR	CE 0007.7281.00	SPRAGUE	293D-106X9 016 C2W	
C238	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C239	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C240	CC 22ONF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C241	CC 22ONF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C242	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..244 C245	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
C246	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C247	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C248	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C249	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C250	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C251	CC 22ONF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C252	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C253	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C254	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C255	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C256	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C257	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C258	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C259	CC 22OPF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
..262 C263	CC 22ONF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C264	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C265	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C266	CC 22ONF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
..269 C270	CC 15PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8227.00	MURATA	GRM39COG***F50ZPT	
C271	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C272	CC 15PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8227.00	MURATA	GRM39COG***F50ZPT	
..280					

95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	5+	

Wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
C281	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C282	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C283	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C284	CC 15PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8227.00	MURATA	GRM39COG***F50ZPT	
.288 C289	CC 220PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C290	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C291	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C292	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C293	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C294	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S	
C295	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
.302 C303	CC 100NF+-10%50V X7R 1206 CERAMIC CHIP CAPACITOR	CC 0007.5237.00	PHILIPS_CO	2238 581 55649	
C304	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C305	CC 1,5PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT	
C306	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C307	CC 82PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 1097.6363.00	MURATA	GRM39COG***F50ZPT	
C308	CC 47PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
.313 C314	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*	
C315	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
C316	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C317	CC 2,2NF+-1% 50V NPO 1206 SMD-CERAMIC CAPACITOR	0010.2964.00	MURATA	GRM42-6COG222F50PT	
C318	CC 2,2NF+-1% 50V NPO 1206 SMD-CERAMIC CAPACITOR	0010.2964.00	MURATA	GRM42-6COG222F50PT	
C319	CC 47PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C320	CC 22PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C321	CC 47PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
.325 C326	CC 22PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C327	CC 47PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
.329 C330	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C331	CC 47PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C332	CE 22UF+-20%35V RUND SMD SMD ELECTROLYTIC CAPACIT.	CE 0009.6253.00	PANASONIC	EEV HB 1V 220P	
C333	CC 47PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C334	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C335	CC 47PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
.343 C344	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C345	CC 47PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
.348 C349	CC 22PF+-1% 50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C350	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C351	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C352	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	


1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	6+	

J.0044 0024

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C353	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C354	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C355	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..357	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C358	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C359	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C360	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
..362	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C363	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C364	CC 10PF+-1% 50V CDG 0603 SMD-CERAMIC CAPACITOR	CC 0008.2183.00	AVX	0603 5J 100 FAW TR	
C365	CC 10PF+-1% 50V CDG 0603 SMD-CERAMIC CAPACITOR	CC 0008.2183.00	AVX	0603 5J 100 FAW TR	
C366	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C367	CC 1,5PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4450.00	MURATA	GRM39COG***B50ZPT	
C368	CC 1,0PF0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C369	CC 10PF+-1% 50V CDG 0603 SMD-CERAMIC CAPACITOR	CC 0008.2183.00	AVX	0603 5J 100 FAW TR	
C370	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C371	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C372	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C373	CC 10PF+-1% 50V CDG 0603 SMD-CERAMIC CAPACITOR	CC 0008.2183.00	AVX	0603 5J 100 FAW TR	
C374	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C375	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
..378	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C379	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C380	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C381	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C382	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C383	CC 39PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.9730.00	MURATA	GRM39COG***F50ZPT	
C384	CC 39PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.9730.00	MURATA	GRM39COG***F50ZPT	
C385	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C386	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C387	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C388	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C389	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C390	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..392	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C393	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C394	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C395	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C396	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C397	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C398	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C399	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C400	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	

95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	7+

wir uns alle Rechte vor.


Kennz. Comp. No.	Bezeichnung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
C401 ..403	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C404 ..407	CC 8,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4550.00	MURATA	GRM39COG***B50ZPT	
C408	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C409	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C410	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C411	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C412	CC 82PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 1097.6363.00	MURATA	GRM39COG***F50ZPT	
C413 ..415	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C416	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C417	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C418	CC 1UF+-10% 50V X7R 2220 CERAMIC CAPACITOR	CC 0520.6873.00	AVX	2220 5C 105 KAT**A(F	
C419	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C420	CC 0,8PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7166.00	AVX	0603 5J *** AAW TR	
C421	CC 1,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4444.00	MURATA	GRM39COG***B50ZPT	
C422	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C423	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C424	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C425	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C426	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT	
C427	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C428	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*	
C429 ..434	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C435	CC 10PF+-1% 50V COG 0603 SMD-CERAMIC CAPACITOR	CC 0008.2183.00	AVX	0603 5J 100 FAW TR	
C436	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C437	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C438 ..441	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C442	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C443	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C444	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C445	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C446	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C447	CC 15NF+-5% 25V HDK 0603 SMD CAPACITOR	CC 0048.4064.00	MURATA	GRM39X7R153J25PT	
C448 ..451	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C452	XX ENTHALTEN IN INCLUDED IN				
C453	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR	
C454	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C455	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C456	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C457	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	8+

5.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C458	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C459	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C460	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*	
..462 C463	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C464	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C465	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C466	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C467	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*	
C468	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C469	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C470	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
..473 C474	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C475	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C476	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C477	CC 10NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4844.00	MURATA	GRM39X7R***K5C500PT*	
C478	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C479	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C480	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S	
C481	CC 3,3NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0048.5390.00	MURATA	GRM39X7R332K5C500PT	
C482	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR	
C483	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C484	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C485	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C486	CC 0,7PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7150.00	AVX	0603 5J *** AAW TR	
C487	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C488	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT	
C489	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C490	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C491	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C492	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C493	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C500PT*	
C494	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C495	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C496	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C497	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C498	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
..500 C501	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C502	CC 0,1PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7095.00	AVX	0603 5J *** AAW TR	
C503	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	9+

95.0026-0693

wir uns alle Rechte vor.


Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Designation	contained in
C504	CC 0,2PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7108.00	AVX	0603 5J *** AAW TR	
C505	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR	
C506	CC 0,4PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7120.00	AVX	0603 5J *** AAW TR	
C507	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C508	CE 22UF+-20%35V RUND SMD SMD ELECTROLYTIC CAPACIT.	CE 0009.6253.00	PANASONIC	EEV HB 1V 220P	
C509	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C510	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C511	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C514	CE 100UF+-20%16V RUND SMD SMD-ELECTROLYTIC CAPACIT.	CE 0009.6553.00	SANYO	16CV100F(G)S	
C515	CE 22UF+-20%35V RUND SMD SMD ELECTROLYTIC CAPACIT.	CE 0009.6253.00	PANASONIC	EEV HB 1V 220P	
C516	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C517	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C518	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C519	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C520	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C521	CE 4,7UF +-10% 25V 7343 TANTALUM CHIP CAPACITOR	CE 0007.7230.00	SPRAGUE	293D475X9035D2W	
C522	CE 4,7UF +-10% 25V 7343 TANTALUM CHIP CAPACITOR	CE 0007.7230.00	SPRAGUE	293D475X9035D2W	
C523	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C524	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C525	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C526	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C527	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C528	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C529	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C530	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C535	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C541	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C542	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C543	CC 0,3PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7114.00	AVX	0603 5J *** AAW TR	
C544	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C547	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C548	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C549	CC 4,7NF+-10% 50VHDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4809.00	MURATA	GRM39X7R***K5C50OPT*	
C550	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C551	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C552	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C553	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C554	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C555	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	

1GPK	887 3PLU	ÄI	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR	1084.9800.01 SA	10+	
			IQ-MODULATOR			

15.0028-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C556	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C557	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
C558	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C559	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C560	CC 5,6PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4521.00	MURATA	GRM39COG***B50ZPT	
C561	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C562	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C563	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C564	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C565	CC 8,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4550.00	MURATA	GRM39COG***B50ZPT	
C566	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C500PT*	
C567	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C568	CC 680PF+-1% 50V NPO 1206 CERAMIC CHIP CAPACITOR	CC 0007.7375.00	MURATA	GRM42-6COG 681F 50PT	
C569	CC 0,5PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7137.00	AVX	0603 5J *** AAW TR	
C570	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C571	CC 39PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.9730.00	MURATA	GRM39COG***F50ZPT	
C572	CC 18PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0048.3622.00	MURATA	GRM39COG***F50ZPT	
C573	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C574	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C575	CE 10UF +-10% 10V 6032 TANTALUM CHIP CAPACITOR	CE 0007.7281.00	SPRAGUE	293D-106X9 016 C2W	
C576	CE 10UF +-10% 10V 6032 TANTALUM CHIP CAPACITOR	CE 0007.7281.00	SPRAGUE	293D-106X9 016 C2W	
C577	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C578	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C579	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C580	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C581	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C582	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C583	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C588	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C590	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C591	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C592	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
C593	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C594	CC 6,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8262.00	MURATA	GRM39COG***B50ZPT	
C595	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C596	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C597	CC 680PF+-1% 50V NPO 1206 CERAMIC CHIP CAPACITOR	CC 0007.7375.00	MURATA	GRM42-6COG 681F 50PT	
C598	CC 0,6PF+-0,05PF 0603 SMD-CERAMIC CAPACITOR	CC 0010.7143.00	AVX	0603 5J *** AAW TR	
C599	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	11+

95.0026-0693

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bestell- Designation	contained in
C600	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C601	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C602	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
C603	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C604	CC 39PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.9730.00	MURATA	GRM39COG***F50ZPT	
C605	CC 220NF+-10%50V X7R 1210 CERAMIC CAPACITOR CHIP	CC 0520.6850.00	AVX	1210 5C 224KA 11A	
C606	CE 220UF 20% 10V SMD TANTALUM SMD CAPACITOR	1081.1873.00	SPRAGUE	595D227X0010R2T	
C607	CE 220UF 20% 10V SMD TANTALUM SMD CAPACITOR	1081.1873.00	SPRAGUE	595D227X0010R2T	
C608	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C609	CC 1,8PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4473.00	MURATA	GRM39COG***B50ZPT	
C610	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C611	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C612	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C613	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C614	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C615	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C616	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C617	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
. . 620 C621	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C622	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C623	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C624	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
C625	CE 220UF 20% 10V SMD TANTALUM SMD CAPACITOR	1081.1873.00	SPRAGUE	595D227X0010R2T	
C626	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
. . 629 C630	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C631	CC 1,0PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.8304.00	MURATA	GRM39COG***B50ZPT	
C632	CC 470PF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4896.00	MURATA	GRM39X7R***K5C50OPT*	
. . 634 C635	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT	
. . 637 C638	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C639	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C640	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT	
. . 642 C643	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C644	CC 1,0NF+-10%50V HDK 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4938.00	MURATA	GRM39X7R***K5C50OPT*	
C645	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
. . 652 C653	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C654	CE 4,7UF+-10% 10V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7275.00	SPRAGUE	293D 475 X9 010 B2T	
C655	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C656	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
C657	CC 680PF+-1% 50V NPO 1206 CERAMIC CHIP CAPACITOR	CC 0007.7375.00	MURATA	GRM42-6COG 681F 50PT	


1GPK	887 3PLU	AI	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	12+

5.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
C658	CC 680PF+-1% 50V NPO 1206 CERAMIC CHIP CAPACITOR	CC 0007.7375.00	MURATA	GRM42-6COG 681F 50PT	
C659	CC 33NF+-10% 25V HDK 0603 SMD CERAMIC CAPACITOR	CC 1051.4697.00	AVX	CM105X7R333K25VAT	
.662 C663	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C664	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C665	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C666	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C667	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
.669 C670	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C671	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C672	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C673	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C674	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C675	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C676	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C677	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C678	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C679	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C680	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C681	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C682	CC 10P+-0,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4567.00	MURATA	GRM39COG***B50ZPT	
C683	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C684	RG 1MO +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5370.00	DRALORIC	CR 0603	
C685	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C686	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C687	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C688	CC 22PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4609.00	MURATA	GRM39COG***F50ZPT	
C689	CC 47PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4644.00	MURATA	GRM39COG***F50ZPT	
.692 C693	CC 1,2NF+-1% 50V NPO 1206 CERAMIC CHIP CAPACITOR	CC 0007.7400.00	AVX	1206 5A 122FAT00J	
.698 C699	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C700	CC 3,3PF 0,1PF 50V NPO 06 SMD-CERAMIC-CAPACITOR	CC 0009.8285.00	MURATA	GRM39COG***B50ZPT	
C701	CC 4,7PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4538.00	MURATA	GRM39COG***B50ZPT	
C702	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C703	NICHT BESTUECKT/NOT FITTED CC 6,8NF+-1% 50V NPO 1210 SMD-CERAMIC CAPACITOR	0010.2993.00	MURATA	GRM42-2COG682F50PT	
C704	CC 6,8NF+-1% 50V NPO 1210 SMD-CERAMIC CAPACITOR	0010.2993.00	MURATA	GRM42-2COG682F50PT	
C705	CC 220PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4721.00	MURATA	GRM39COG***F50ZPT	
.707 C708	CC 100NF+-10%16V HDK 0603 CERAMIC CHIP CAPACITOR	CC 1097.6292.00	AVX	CM105 X7R104K16AT	
C709	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C710	CE 220UF 20% 10V SMD TANTALUM SMD CAPACITOR	1081.1873.00	SPRAGUE	595D227X0010R2T	


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	13+

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Designation	contained in
C711	CC 2,2PFO,1PF50V NPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4467.00	MURATA	GRM39COG***B50ZPT	
C712	CC 100PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.4680.00	MURATA	GRM39COG***F50ZPT	
.715 C800	CE 1UF +-10% 25V 3528 TANTALUM CHIP CAPACITOR	CE 0007.7217.00	SPRAGUE	293D 105 X9 025 B2T	
C850	CC 39PF+-1% 50VNPO 0603 SMD-CERAMIC-CAPACITOR	CC 0009.9730.00	MURATA	GRM39COG***F50ZPT	
D1	BD AD835AR 250MHZ 4QMULTI 4-QUADRANT MULTIPLIER	1085.1632.00	ANALOG_DEV	AD835AR	
D2	BD AD835AR 250MHZ 4QMULTI 4-QUADRANT MULTIPLIER	1085.1632.00	ANALOG_DEV	AD835AR	
D3	BL AD7008 DDS MODULATOR IC MODULATOR	BL 1078.3410.00	ANALOG_DEV	AD7008JP50	
D4	BL PC74HCT125T 4XBUFF. 3S QUAD LINE DRIVER	BL 0007.5395.00	PHILIPS_SE (PC)	74HCT125(D/T)	
D5	BS DG419DY 1XUM ANALOGSCH ANALOG SWITCH	0746.0322.00	SILICONIX	DG419DY	
D6	BL PC74HC86T 4X2IN EXOR QUAD 2INPUT EXOOR GATE	BL 0007.3511.00	PHILIPS_SE (PC)	74HC86(D/T)	
D7	BL PC74HC86T 4X2IN EXOR QUAD 2INPUT EXOOR GATE	BL 0007.3511.00	PHILIPS_SE (PC)	74HC86(D/T)	
D8	BS DG419DY 1XUM ANALOGSCH ANALOG SWITCH	0746.0322.00	SILICONIX	DG419DY	
D9	BS DG413DY 2A2R ANALOGSCH QUAD ANALOG CMOS.SWITCH	1004.7058.00	SILICONIX	DG413DY	
.15 D16	BS DG408DY 8CH.ANAL.MUX IC 8 CH ANALOG MULTIPLEX	1036.4460.00	SILICONIX	DG408DY	
D17	BS DG408DY 8CH.ANAL.MUX IC 8 CH ANALOG MULTIPLEX	1036.4460.00	SILICONIX	DG408DY	
D18	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG.	0804.0977.00	PHILIPS_SE (PC)	74HC4094(D/T)	
D19	BL PC74HCT08T 4X2IN ANDG AND GATE	BL 0007.6179.00	PHILIPS_SE (PC)	74HCT08(D/T)	
D20	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG.	0804.0977.00	PHILIPS_SE (PC)	74HC4094(D/T)	
.26 D27	BM AT-339 GAAS VAR.DAEMPF IC DIGITAL ATTENUATOR NUR VAR/ONLY MOD: 02	1085.1555.00	MACOM	AT-339 PIN	
D27	BM AT-339 GAAS VAR.DAEMPF IC DIGITAL ATTENUATOR NUR VAR/ONLY MOD: 04	1085.1555.00	MACOM	AT-339 PIN	
D27	BM AT-339 GAAS VAR.DAEMPF IC DIGITAL ATTENUATOR NUR VAR/ONLY MOD: 06	1085.1555.00	MACOM	AT-339 PIN	
D27	BM AT-339 GAAS VAR.DAEMPF IC DIGITAL ATTENUATOR NUR VAR/ONLY MOD: 08	1085.1555.00	MACOM	AT-339 PIN	
D28	BM SW-339 GAAS SPDTSWITCH GAAS RF-SWITCH	1085.2074.00	MACOM	SW339 PIN	
D29	BL PC74HC4051T 8CH.AN.MUX 8CHANNEL ANAL.MULTIPLEXER	0007.3592.00	PHILIPS_SE (PC)	74HC4051(D/T)	
.31 D32	BL PC74HC08T 4X2IN.ANDG QUAD 2INPUT AND GATE	BL 0007.3486.00	PHILIPS_SE (PC)	74HC08(D/T)	
D33	BL MCK12140D PLL-PHASEDET PHASE FREQUENZY DETECTOR	BL 1052.6235.00	MOTOROLA	(MC)K(M)140(D)	
D34	BL PC74HCT132T 4X2IN SCHM NAND SCHMITT TRIGGER	BL 0007.6340.00	PHILIPS	(PC)74HCT132(D/T)	
D35	BL PC74HCT132T 4X2IN SCHM NAND SCHMITT TRIGGER	BL 0007.6340.00	PHILIPS	(PC)74HCT132(D/T)	
D36	BL PC74HCT86T 4X2IN.EXOR EXOR GATE	0007.6291.00	PHILIPS_SE (PC)	74HCT86(D/T)	
D37	BM SW-339 GAAS SPDTSWITCH GAAS RF-SWITCH	1085.2074.00	MACOM	SW339 PIN	
D38	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG.	0804.0977.00	PHILIPS_SE (PC)	74HC4094(D/T)	
D39	BL PC74HC123T 2XMULTIVIB DUAL MULTIVIBRATOR	BL 0007.3528.00	PHILIPS_SE (PC)	74HC123(D/T)	
D40	BS MPC102 2X2T01 VIDEOMUX IC ANALOG MULTIPLEXER	1085.1626.00	BURR_BROWN	MPC102AU	
D41	BJ DAC8143FS 1X12B-DAC 12B SERIAL D/A-CONVERTER	1012.9510.00	PMI	DAC8143FS	
.43 D44	BL UPB585G 2.5G 4:1 PRESC IC PRESCALER 2.5GHZ	BL 1002.5029.10	NEC	(UPB)585(G)-(E1)	
D45	BJ DAC8143FS 1X12B-DAC 12B SERIAL D/A-CONVERTER	1012.9510.00	PMI	DAC8143FS	
.48					


1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	14+	

5.0025-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
D49	BL PC74HCT86T 4X2IN.EXOR EXOR GATE	0007.6291.00	PHILIPS_SE	(PC)74HCT86(D/T)	
D50	BM SW-339 GAAS SPDTSWITCH GAAS RF-SWITCH	1085.2074.00	MACOM	SW339 PIN	
D51	BM SW-339 GAAS SPDTSWITCH GAAS RF-SWITCH	1085.2074.00	MACOM	SW339 PIN	
D52	BG TH3032.1C SERBUSD ASIC IC GATE ARRAY	BG 0008.6143.00	THESYS	TH3032.1C	
D53	BS DG419DY 1XUM ANALOGSCH ANALOG SWITCH	0746.0322.00	SILICONIX	DG419DY	
D54	BM SW-339 GAAS SPDTSWITCH GAAS RF-SWITCH	1085.2074.00	MACOM	SW339 PIN	
D55	BC X24164S8I-2.7 IC MEMORY	BC 0048.4258.00	XICOR	X24164S G	
D56	BL PC74HCT125T 4XBUFF. 3S QUAD LINE DRIVER	BL 0007.5395.00	PHILIPS_SE	(PC)74HCT125(D/T)	
D57	BL PC74HC86T 4X2IN EXOR QUAD 2INPUT EXOR GATE	BL 0007.3511.00	PHILIPS_SE	(PC)74HC86(D/T)	
D58	BL PC74HC4094T 8ST.BUSREG 8-STAGE SHIFT&STORE REG.	0804.0977.00	PHILIPS_SE	(PC)74HC4094(D/T)	
D59	BL PC74HC4051T 8CH.AN.MUX 8CHANNEL ANAL.MULTIPLEXER	0007.3592.00	PHILIPS_SE	(PC)74HC4051(D/T)	
D61	BJ LTC1446L 2X12-DAC 12B SERIAL D/A-CONVERTER	1085.2200.00	LINEAR_TEC	(LTC)1446LI(S8)	
G1	EO 50,000MHZ QUARZDSZ QUARTZ CRYSTAL OSCILLATOR	1029.2995.00	SEIKO	SG-615PH-C	
L1	LD SMD-DR.Z=55 OHM 300MHZ CHOKE	1085.1684.00	PHILIPS	BDS 3/3/4.6-4S2	
L2	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100	
L3	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L4	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	
L5	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	
L6	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L7	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L8	LD 3,3NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6630.00	TOKO	LL1608-FH...K(J)	
L9	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L11	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L12	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L13	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100	
L14	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L15	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L16	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)	
L17	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L18	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)	
L19	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L20	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L21	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L22	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L23	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L24	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L25	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L26	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L27	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L28	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L29	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L30	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L31	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L32	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L33	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L34	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L35	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L36	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L37	LD 22NH 10% 0,60A 1210 RF CHOKE	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	

Für diese Unterlage behalten wir uns alle Rechte vor.


95.0026-0693

1GPK	887 3PLU	Äi	Datum Data	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	15+

wir uns alle Rechte vor.


Nennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	continued in
L38	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L39	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L40	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L41	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
..47	L48	LD 220NH 10% 0,28A 1210 RF CHOKE	LD 0520.7911.00	SIEMENS	B82422-A3221-J(K)100
L49	LD 22NH 10% 0,60A 1210 RF CHOKE	1002.4897.00	SIEMENS	B82422-A3220-J(K)100	
..51	L52	LD 15NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6718.00	TOKO	LL1608-FH...K(J)
L53	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L54	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L55	LD 8,2NH+-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6682.00	TOKO	LL1608-FH...K(J)	
L56	LD 22UH 10% 0,14A 1210 RF CHOKE	LD 0520.7886.00	SIEMENS	B82422-A1223-J(K)100	
L57	LD 22UH 10% 0,14A 1210 RF CHOKE	LD 0520.7886.00	SIEMENS	B82422-A1223-J(K)100	
L58	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L59	LD 39NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6760.00	TOKO	LL1608-FH...K(J)	
L60	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L61	LD 22UH 10% 0,14A 1210 RF CHOKE	LD 0520.7886.00	SIEMENS	B82422-A1223-J(K)100	
L62	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L63	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L64	LD 47NH 10% 0,51A 1210 RF CHOKE	0008.5976.00	SIEMENS	B82422-A3470-J(K)100	
L65	LD 47NH 10% 0,51A 1210 RF CHOKE	0008.5976.00	SIEMENS	B82422-A3470-J(K)100	
L66	LD 22UH 10% 0,14A 1210 RF CHOKE	LD 0520.7886.00	SIEMENS	B82422-A1223-J(K)100	
..68	L69	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)
..73	L74	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100
L75	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100	
L76	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L77	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L78	LD 2,2UH 10% 0,27A 1210 RF CHOKE	LD 0520.7870.00	SIEMENS	B82422-A1222-J(K)100	
L79	LD 15UH 10% 0,16A 1210 RF CHOKE	LD 0009.5192.00	SIEMENS	B82422-A1153-J(K)100	
L80	LD SP-DROSSEL 15UH 2,45A CHOKE	1081.0283.00	SUMIDA	CDR125-150	
L81	LD 150NH 1%OR31 0,7A 1206 CERAMIC CHIP COIL	0048.4635.00	COILCRAFT	1206CS-151XFBC	
L82	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100	
L83	LD 47UH 10% 0,08A 1210 RF CHOKE	LD 0008.1693.00	SIEMENS	B82422-A1473-J(K)100	
L84	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	
L85	LD 47NH +-10% 0,3A 0805 SMD-MULTILAYER INDUCTOR	LD 0009.6824.00	TOKO	LL2012-FH47NK(J)	
L86	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100	
..89	L90	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100
L91	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100	
L92	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100	
..96	L97	XX ENTHALTEN IN INCLUDED IN			

5.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	16+

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
L98	XX ENTHALTEN IN INCLUDED IN				
L99	LD 22NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6730.00	TOKO	LL1608-FH...K(J)	
L100	XX ENTHALTEN IN INCLUDED IN				
L101	XX ENTHALTEN IN INCLUDED IN				
L102	XX ENTHALTEN IN INCLUDED IN				
L103	XX ENTHALTEN IN INCLUDED IN				
L104	XX ENTHALTEN IN INCLUDED IN				
L105	XX ENTHALTEN IN INCLUDED IN				
L106	XX ENTHALTEN IN INCLUDED IN				
L107	XX ENTHALTEN IN INCLUDED IN				
L108	XX ENTHALTEN IN INCLUDED IN				
L109	XX ENTHALTEN IN INCLUDED IN				
L110	XX ENTHALTEN IN INCLUDED IN				
L111	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CD	RC21 0 OHM	
L112	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L113	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L114	XX ENTHALTEN IN INCLUDED IN				
L115	XX ENTHALTEN IN INCLUDED IN				
L116	XX ENTHALTEN IN INCLUDED IN				
L117	LD 27NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6747.00	TOKO	LL1608-FH...K(J)	
L118	LD 100NH 1%OR26 0.8A 1206 CERAMIC CHIP COIL	0048.4612.00	COILCRAFT	1206CS-101XFBC	
L119	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L120	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9261.00	SIEMENS	B82422-A1104-J(K)100	
L121	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L122	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L123	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L124	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9261.00	SIEMENS	B82422-A1104-J(K)100	
L125	LD 33NH +-10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6753.00	TOKO	LL1608-FH...K(J)	
L126	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L127	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9261.00	SIEMENS	B82422-A1104-J(K)100	
L128	LD SMD-DR.Z=8500HM 100MHZ CHOKE	1085.1661.00	PHILIPS	WBS2.5-5/4.8/10-4B1	
L129	XX ENTHALTEN IN INCLUDED IN				
L130	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L131	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L132	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L133	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L134	LD 100NH 1%OR26 0.8A 1206 CERAMIC CHIP COIL	0048.4612.00	COILCRAFT	1206CS-101XFBC	
L135	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L136	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L137	LD 100NH 1%OR26 0.8A 1206 CERAMIC CHIP COIL	0048.4612.00	COILCRAFT	1206CS-101XFBC	
L138	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L139	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L140	LD 100NH 1%OR26 0.8A 1206 CERAMIC CHIP COIL	0048.4612.00	COILCRAFT	1206CS-101XFBC	
L141	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L142	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L143	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L144	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L145	LD 2,2UH 10% 0,27A 1210 RF CHOKE	LD 0520.7870.00	SIEMENS	B82422-A1222-J(K)100	
L146	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	

1GPK	887 3PLU	ÄI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	17+

95.0026-0693

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	continued in
L147	LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L148	RF CHOKE XX ENTHALTEN IN INCLUDED IN				
L149	XX ENTHALTEN IN INCLUDED IN				
L150	XX ENTHALTEN IN INCLUDED IN				
L151	XX ENTHALTEN IN INCLUDED IN				
L152	XX ENTHALTEN IN INCLUDED IN				
L153	XX ENTHALTEN IN INCLUDED IN				
L154	XX ENTHALTEN IN INCLUDED IN				
L155	XX ENTHALTEN IN INCLUDED IN				
L156	LD 22ONH 10% 0,28A 1210	LD 0520.7911.00	SIEMENS	B82422-A3221-J(K)100	
..161	RF CHOKE				
L162	LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
	RF CHOKE				
L163	LD 100UH 10% 0,06A 1210	LD 0007.9261.00	SIEMENS	B82422-A1104-J(K)100	
	RF CHOKE				
L164	LD 2,2UH 10% 0,27A 1210	LD 0520.7870.00	SIEMENS	B82422-A1222-J(K)100	
	RF CHOKE				
L165	LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
	RF CHOKE				
L166	LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
	RF CHOKE				
L167	LD 100UH 10% 0,06A 1210	LD 0007.9261.00	SIEMENS	B82422-A1104-J(K)100	
	RF CHOKE				
L168	XX ENTHALTEN IN INCLUDED IN				
L169	LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
	RF CHOKE				
L170	LD SP-DROSSEL 15UH 2,45A CHOKE	1081.0283.00	SUMIDA	CDR125-150	
L171	LD 10UH 10% 690MA 2220	1106.8252.00	SIEMENS	B82442A1103K	
	RF CHOKE				
L172	LD SP-DROSSEL 15UH 2,45A CHOKE	1081.0283.00	SUMIDA	CDR125-150	
L173	LD 1UH 10% 0,38A 1210	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
	RF CHOKE				
L174	LD 22ONH 10% 0,28A 1210	LD 0520.7911.00	SIEMENS	B82422-A3221-J(K)100	
	RF CHOKE				
L175	LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
	RF CHOKE				
L176	LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
	RF CHOKE				
L177	LD 1UH 10% 0,38A 1210	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
	RF CHOKE				
L178	LD 100NH 1%OR26 0.8A 1206 CERAMIC CHIP COIL	0048.4612.00	COILCRAFT	1206CS-101XFBC	
L179	LD 1UH 10% 0,38A 1210	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
..182	RF CHOKE				
L183	LD 4,7UH 3% 0,31A 1812	0048.6250.00	DALE	IMC-1812-4.7UH-3%	
	SMD INDUCTOR				
L184	LD 10UH 10% 0,18A 1210	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
	RF CHOKE				
L185	LD 4,7UH 3% 0,31A 1812	0048.6250.00	DALE	IMC-1812-4.7UH-3%	
	SMD INDUCTOR				
L186	LD 2,2UH 3% 0,38A 1812	0048.6221.00	DALE	IMC-1812-2.2UH-3%	
	SMD INDUCTOR				
L187	LD 2,2UH 3% 0,38A 1812	0048.6221.00	DALE	IMC-1812-2.2UH-3%	
	SMD INDUCTOR				
L188	LD 15UH 3% 0,06A 1812	0048.6544.00	DALE	ISC-1812-15UH-3%	
	SMD INDUCTOR				
L189	XX ENTHALTEN IN INCLUDED IN				
L190	XX ENTHALTEN IN INCLUDED IN				
L191	XX ENTHALTEN IN INCLUDED IN				
L192	XX ENTHALTEN IN INCLUDED IN				
L193	XX ENTHALTEN IN INCLUDED IN				


1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	18+

5.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	Continued in
L194	XX ENTHALTEN IN INCLUDED IN				
L195	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L196	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
L197	LD 15UH 3% 0,06A 1812 SMD INDUCTOR	0048.6544.00	DALE	ISC-1812-15UH-3%	
L198	LD 4,7UH 3% 0,31A 1812 SMD INDUCTOR	0048.6250.00	DALE	IMC-1812-4.7UH-3%	
L199	LD 4,7UH 3% 0,31A 1812 SMD INDUCTOR	0048.6250.00	DALE	IMC-1812-4.7UH-3%	
L200	LD 2,2UH 3% 0,38A 1812 SMD INDUCTOR	0048.6221.00	DALE	IMC-1812-2.2UH-3%	
L201	LD 2,2UH 3% 0,38A 1812 SMD INDUCTOR	0048.6221.00	DALE	IMC-1812-2.2UH-3%	
L202	LD 18NH 10% 0,3A 0603 SMD-MULTILAYER INDUCTOR	LD 0009.6724.00	TOKO	LL1608-FH...K(J)	
L203	LD 15UH 3% 0,06A 1812 SMD INDUCTOR	0048.6544.00	DALE	ISC-1812-15UH-3%	
L204	LD 15UH 3% 0,06A 1812 SMD INDUCTOR	0048.6544.00	DALE	ISC-1812-15UH-3%	
L205	LD 1UH 10% 0,38A 1210 RF CHOKE	LD 6006.0130.00	SIEMENS	B82422-A1102-J(K)100	
L206	LD 470NH 10% 0,15A 1210 RF CHOKE	LD 0007.9926.00	SIEMENS	B82422-A3471-J(K)100	
L207	LD 10UH 10% 0,18A 1210 RF CHOKE	LD 0007.9255.00	SIEMENS	B82422-A1103-J(K)100	
N1	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)	
N2	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)	
N3	BO OP297GS 2X PREC OPAMP IC DUALOPAMP	6071.9467.00	ANALOG_DEV	OP297GS	
N4	BO TLO74ACD 4XFET OPAMP OPERATIONAL AMPLIFIER	0007.7823.00	TEXAS	TLO74A(CD)	
N5	BM MSA0386 DC-2.4G MMIC BROADBAND AMPLIFIER	0848.4461.00	AVANTEK	MSA0386	
N6	BO NE5534D OPAMP OPERATIONAL AMPLIFIER	0815.7555.00	SIGNETICS	NE5534(D)	
N7	BO OP275GS LN 2XFET OPAMP LOW NOISE FET AUDIO OPAMP	2043.0928.00	ANALOG_DEV	OP275GS	
..11 N12	BO REFO1CS 10V 20MA VREF VOLTAGE REFERENCE	1002.5129.00	PMI	REFO1C(S)	
N13	BO AD822BR 2XFET OPAMP RAIL-TO-RAIL DUAL-FET OP	2043.0934.00	ANALOG_DEV	AD822BR	
N14	BO AD829JR HISPEED OPAMP LOW-NOISE HIGH-SPEED AMP	BO 1036.4254.00	ANALOG_DEV	AD829JR	
N15	BO AD829JR HISPEED OPAMP LOW-NOISE HIGH-SPEED AMP	BO 1036.4254.00	ANALOG_DEV	AD829JR	
N16	BO OP400GS 4XLP OPAMP QUAD LOW-OFFSET OPAMP	1002.5135.00	PMI	OP400G(S)	
N17	BO LT1058SW 4XFET OPAMP QUAD OPAMP FET	2013.1484.00	LINEAR_TEC	LT1058SW	
N18	BO OP400GS 4XLP OPAMP QUAD LOW-OFFSET OPAMP	1002.5135.00	PMI	OP400G(S)	
N19	BO OP400GS 4XLP OPAMP QUAD LOW-OFFSET OPAMP	1002.5135.00	PMI	OP400G(S)	
N20	BO OP297GS 2X PREC OPAMP IC DUALOPAMP	6071.9467.00	ANALOG_DEV	OP297GS	
N21	BO OP297GS 2X PREC OPAMP IC DUALOPAMP	6071.9467.00	ANALOG_DEV	OP297GS	
N22	BO AD744KR FET OPAMP 500NS SETTLE. BIFET OPAMP	BO 0854.1754.00	ANALOG_DEV	(AD)744KR	
..24 N25	BO OP297GS 2X PREC OPAMP IC DUALOPAMP	6071.9467.00	ANALOG_DEV	OP297GS	
..27 N28	BL UPB581C 2:1 PRESC IC PRESCALER/DIVIDER	BL 0840.6113.00	NEC	(UP)B581C	
N29	BO AD811JR VIDEO CF OPAMP HIGH-OUTPUT CURRENT OPAMP	BO 2025.2997.00	ANALOG_DEV	AD811JR	
N30	BO MAX942CSA R-TO-R 2XCOM COMPARATOR	1085.1710.00	MAXIM	MAX942CSA-T	
N31	BO OP07CS8 OPAMP OPERATIONAL AMPLIFIER	0007.7781.00	LINEAR_TEC	LT1001(CS8)	
..33 N34	BO AD744KR FET OPAMP 500NS SETTLE. BIFET OPAMP	BO 0854.1754.00	ANALOG_DEV	(AD)744KR	


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	19+

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
N35	BO AD744KR FET OPAMP 50ONS SETTL. BIFET OPAMP	BO 0854.1754.00		ANALOG_DEV (AD)744KR	
N37	BO OP275GS LN 2XFET OPAMP LOW NOISE FET AUDIO OPAMP	2043.0928.00		ANALOG_DEV OP275GS	
N38	BM MGA82563 0.1-6G MMIC MICROWAVE MONOLITHIC AMPL	1085.2100.00		HEWLETT_PA MGA-82563-TR1	
N39	BO AD744KR FET OPAMP 50ONS SETTL. BIFET OPAMP	BO 0854.1754.00		ANALOG_DEV (AD)744KR	
..41 N42	BO MAX942CSA R-TO-R 2XCOM COMPARATOR	1085.1710.00	MAXIM	MAX942CSA-T	
N43	BO OP275GS LN 2XFET OPAMP LOW NOISE FET AUDIO OPAMP	2043.0928.00		ANALOG_DEV OP275GS	
N44	BM AM-1 0.25-3GHZ MMIC BROADBAND AMPLIFIER	1104.9980.00		WATKINS-JO WJ-AM1	
..47 N48	BO OP400GS 4XLP OPAMP QUAD LOW-OFFSET OPAMP	1002.5135.00	PMI	OP400G(S)	
N49	BM AM-1 0.25-3GHZ MMIC BROADBAND AMPLIFIER	1104.9980.00		WATKINS-JO WJ-AM1	
P1	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
..12 P13	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P14	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P17	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P18	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P19	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P20	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
..26 P29	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P32	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
..45 P50	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
..69 P72	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
P75	VL EINPRESSTIFT 5,6 PIN	VL 0010.7250.00	AMP	1-928776-5	
R1	RG 9,09KOH+-0,1%TK25 1206 SMD-RESISTOR EIA1206	0009.8904.00	PHILIPS_CO	MPC 01	
R2	RS 0,25W 2KOHM +-20% SMD POTENTIOMETER	RS 0007.9626.00	BI_TECHNOL	23 B R... TR	
R3	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
..6 R7	RG 39R 1% 1W 1218 SMD-RESISTOR	1104.2786.00	PHILIPS_CO	PRC201-39R 1% TK100	
R8	RG 39R 1% 1W 1218 SMD-RESISTOR	1104.2786.00	PHILIPS_CO	PRC201-39R 1% TK100	
R9	RG 220K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7108.00	DRALORIC	CR 0603	
R10	RG 220K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7108.00	DRALORIC	CR 0603	
R11	RG 121 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9498.00	DRALORIC	CR 0603	
R12	RG 1,3KOHM+-0,1%TK25 1206 RESISTOR	0010.1968.00	PHILIPS_CO	MPC 01	
R13	RG 20R 1% 1W 1218 SMD RESISTOR	1104.2734.00	PHILIPS_CO	PRC201-20R 1% TK100	
..15 R16	RG 51,0 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9030.00	DRALORIC	CR 0603	
R17	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R18	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R19	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R20	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO	RC 22 H	
R21	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO	RC 22 H	
R22	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO	RC 22 H	


1GPK	887 3PLU	Äi	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	20+

5.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R23	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		PHILIPS_CO RC21 O OHM	
R24	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R25	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R26	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R27	RG 100R +-1% TK100	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
. . 30	SMD RESISTOR EIA0603				
R31	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R32	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R33	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R34	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R35	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R36	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R37	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R38	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R39	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R40	RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R41	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R42	RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R43	RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R43	NUR VAR/ONLY MOD: 02 RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R43	NUR VAR/ONLY MOD: 04 RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R43	NUR VAR/ONLY MOD: 06 RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R44	NUR VAR/ONLY MOD: 08 RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R45	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R46	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R47	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8410.00	PHILIPS_CO RC 22 H	
R48	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R49	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R50	RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.7666.00	PHILIPS_CO MPC 01	
R50	NUR VAR/ONLY MOD: 02 RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.7666.00	PHILIPS_CO MPC 01	
R50	NUR VAR/ONLY MOD: 04 RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.7666.00	PHILIPS_CO MPC 01	
R50	NUR VAR/ONLY MOD: 06 RG 7,5KOHM+-1%TK100 RG CHIP RESISTOR	1206	RG 0007.0764.00	PHILIPS_CO RC02	
R51	NUR VAR/ONLY MOD: 08 RS 0,25W 5KOHM +-20% SMD POTENTIOMETER		RS 0007.9632.00	BI_TECHNOL 23 B R... TR	
R52	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R53	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R54	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	


Für diese Unterlage behalten
wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHM & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	21+

wir uns alle Rechte vor.


Kennz. Comp. No.	Bezeichnung Designation	Sachnummer Stock No.	Manufacturer Designation	contained in
R55	RG 220R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6953.00	DRALORIC CR 0603	
R56	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
. . 62 R63	RG 3K92 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8427.00	PHILIPS_CO RC 22 H	
R64	RG 3K92 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8427.00	PHILIPS_CO RC 22 H	
R65	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R66	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R67	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC CR 0603	
R68	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
. . 71 R72	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R73	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO RC 22 H	
R74	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
. . 81 R82	RG 47K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7072.00	PHILIPS_CO RC 22 H	
R83	RG 47K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7072.00	PHILIPS_CO RC 22 H	
R84	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
. . 88 R89	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R90	RG 51,0 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9030.00	DRALORIC CR 0603	
R91	RG 51,0 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9030.00	DRALORIC CR 0603	
R92	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R93	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R94	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R95	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO RC 22 H	
R96	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO RC 22 H	
R97	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R98	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R99	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R100	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
. . 102 R103	RG 2K0 +-1% TK100 0603 SMD RESISTOR EIA0603	1097.6328.00	PHILIPS_CO RC 22 H	
R104	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R105	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R106	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R107	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R108	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R109	RG 47K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7072.00	PHILIPS_CO RC 22 H	
R110	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R111	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R112	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R113	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC CR 0603	
R114	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R115	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	

1GPK	887 3PLU	Äl	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	22+

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R116	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO	RC 22 H	
R117	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R118	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R119	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO	RC 22 H	
R120	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R121	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R122	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
R123	RG 27,4KOH+-0,1%TK25 1206 SMD-RESISTOR EIA1206	0009.7743.00	PHILIPS_CO	MPC 01	
R124	RS 0,25W 1KOHM +-20% SMD RG POTENTIOMETER	RS 0007.9610.00	BI_TECHNOL	23 B R... TR	
R125	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R126	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R127	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
R128	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R129	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
..133	SMD RESISTOR EIA0603				
R134	RG 82,5 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9052.00	DRALORIC	CR 0603	
R135	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R136	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R137	RG 220R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6953.00	DRALORIC	CR 0603	
R138	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
..140	SMD RESISTOR EIA0603				
R141	RG 100R 1% 1W 1218 SMD RESISTOR	1104.2740.00	PHILIPS_CO	PRC201-100R 1% TK100	
R142	RG 100R 1% 1W 1218 SMD RESISTOR	1104.2740.00	PHILIPS_CO	PRC201-100R 1% TK100	
R143	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
..145	SMD RESISTOR EIA0603				
R146	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H	
R147	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R148	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R149	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R150	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R151	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R152	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R153	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R154	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R155	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R156	RG 7K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8440.00	PHILIPS_CO	RC 22 H	
R157	RG 12R1+-1%TK100 0603 SMD RESISTOR EIA0603	0010.9275.00	PHILIPS_CO	RC 22 H	
R158	RG 35,7 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9000.00	PHILIPS_CO	RC 22 H	
R159	RG 7K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8440.00	PHILIPS_CO	RC 22 H	
R160	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R161	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R162	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	


Für diese Unterlage behalten
wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	23+

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Manufacturer	Designation	contained in
R163	RG 22R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6901.00	DRALORIC	CR 0603	
R164	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R165	RG 30,1 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9081.00	PHILIPS_CO	RC 22 H	
R166	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 O OHM	
R167	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO	RC 22 H	
R168	RG 5K62 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8433.00	DRALORIC	CR 0603	
R169	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R170	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R171	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R172	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H	
R173	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H	
R174	RG 12R1+-1%TK100 0603 SMD RESISTOR EIA0603	0010.9275.00	PHILIPS_CO	RC 22 H	
R175	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 O OHM	
R176	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R177	RG 7K5 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8440.00	PHILIPS_CO	RC 22 H	
R178	RG 30,1 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9081.00	PHILIPS_CO	RC 22 H	
R179	RG 30,1 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9081.00	PHILIPS_CO	RC 22 H	
R180	RG 1K21 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0010.9817.00	PHILIPS_CO	RC 22 H	
R181	RG 1K21 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0010.9817.00	PHILIPS_CO	RC 22 H	
R182	RG 30,1 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9081.00	PHILIPS_CO	RC 22 H	
R185	RG 56R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9646.00	DRALORIC	CR 0603	
R186	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R187	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R188	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H	
R189	RG 56R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9646.00	DRALORIC	CR 0603	
R190	RG 30,1 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9081.00	PHILIPS_CO	RC 22 H	
R193	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H	
R194	RG 121 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9498.00	DRALORIC	CR 0603	
R195	RG 121 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9498.00	DRALORIC	CR 0603	
R196	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603	
R200	RG 22R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6901.00	DRALORIC	CR 0603	
R203	RG 68R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6930.00	DRALORIC	CR 0603	
R204	RG 825R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8391.00	PHILIPS_CO	RC 22 H	
R205	RG 825R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8391.00	PHILIPS_CO	RC 22 H	
R206	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R209	RG 68R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6930.00	DRALORIC	CR 0603	
R210	RG 68R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6930.00	DRALORIC	CR 0603	
R211	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R215	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	


1GPK	887 3PLU	ÄI	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR	1084.9800.01 SA	24+	
				IQ-MODULATOR		

3.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R216	RG 220R +-1% TK100 0603	0009.6953.00	DRALORIC	CR 0603	
R217	SMD RESISTOR EIA0603 RG 2K2 +-1% TK100 0603	0009.7008.00	PHILIPS_CO	RC 22 H	
R218	SMD RESISTOR EIA0603 RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R219	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R220	SMD RESISTOR EIA0603 RG 301R +-1%TK100 0603	0009.9123.00	PHILIPS_CO	RC 22 H	
R221	SMD RESISTOR EIA0603 RG 3K92 +-1% TK100 0603	0010.8427.00	PHILIPS_CO	RC 22 H	
R222	SMD RESISTOR EIA0603 RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R223	SMD RESISTOR EIA0603 RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R224	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R225	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R226	SMD RESISTOR EIA0603 RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R227	SMD RESISTOR EIA0603 RG 82,5 OHM+-1%TK100 0603	0009.9052.00	DRALORIC	CR 0603	
R228	SMD RESISTOR EIA0603 RG 18K2+-1% TK100 0603	0010.9317.00	DRALORIC	CR 0603	
R229	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R230	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R231	SMD RESISTOR EIA0603 RG 12,0KOH+-0,1%TK25 1206	0009.7620.00	PHILIPS_CO	MPC 01	
R232	SMD-RESISTOR RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R236	SMD RESISTOR EIA0603				
R237	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R238	SMD RESISTOR EIA0603 RG 1,0 KO +-0,1%TK25 1206	0009.7595.00	PHILIPS_CO	MPC 01	
R239	SMD-RESISTOR RG 1,0 KO +-0,1%TK25 1206	0009.7595.00	PHILIPS_CO	MPC 01	
R240	SMD-RESISTOR RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R243	SMD RESISTOR EIA0603				
R244	RG 2K2 +-1% TK100 0603	0009.7008.00	PHILIPS_CO	RC 22 H	
R245	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R246	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R247	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R248	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R249	SMD RESISTOR EIA0603 RG 2K2 +-1% TK100 0603	0009.7008.00	PHILIPS_CO	RC 22 H	
R250	SMD RESISTOR EIA0603 RG 1KO +-1% TK100 0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R251	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R252	SMD RESISTOR EIA0603 RG 1KO +-1% TK100 0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R253	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R254	SMD RESISTOR EIA0603 RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R255	SMD RESISTOR EIA0603 RG 10,0KOH+-0,1%TK25 1206	0009.7666.00	PHILIPS_CO	MPC 01	
R256	SMD-RESISTOR RG 10,0KOH+-0,1%TK25 1206	0009.7666.00	PHILIPS_CO	MPC 01	
R257	SMD-RESISTOR RG 1KO +-1% TK100 0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R258	SMD RESISTOR EIA0603 RG 20K +-1% TK100 0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R259	SMD RESISTOR EIA0603 RG 5,11KOHM+-1%TK100 1206	RG 0007.0729.00	ROEDERSTEI	D25	
R260	CHIP RESISTOR RG 5,11KOHM+-1%TK100 1206	RG 0007.0729.00	ROEDERSTEI	D25	
R261	CHIP RESISTOR RG 39,2KOH+-0,1%TK25 1206	0009.8027.00	PHILIPS_CO	MPC 01	
	SMD-RESISTOR				


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äi	Datum Date	Schaffteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	25+

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	enthalten in
R262	RG 39,2KOH+-0,1%TK25 1206 SMD-RESISTOR	0009.8027.00	PHILIPS_CO	MPC 01	
R263	RG 39K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9823.00	PHILIPS_CO	RC 22 H	
R264	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R265	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R266	RG 8K25 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8456.00	PHILIPS_CO	RC 22 H	
R267	RG 15K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7043.00	DRALORIC	CR 0603	
R268	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
. 270 R271	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC	CR 0603	
R272	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R273	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R274	RG 15K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7043.00	DRALORIC	CR 0603	
R275	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
. 277 R278	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CO	RC 22 H	
R279	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
. 283 R284	RG 82,5 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9052.00	DRALORIC	CR 0603	
R285	RG 392R+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9300.00	PHILIPS_CO	RC 22 H	
R286	RG 392R+-1% TK100 0603 SMD RESISTOR EIA0603	0010.9300.00	PHILIPS_CO	RC 22 H	
R287	RG 825R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8391.00	PHILIPS_CO	RC 22 H	
R288	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CO	RC 22 H	
R289	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603	
R290	RG 470R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6976.00	DRALORIC	CR 0603	
R291	RG 16,2OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.8933.00	DRALORIC	CR 0603	
R292	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R293	RG 16,2OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.8933.00	DRALORIC	CR 0603	
R294	RG 16,2OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.8933.00	DRALORIC	CR 0603	
R295	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R296	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R297	RG 3K92 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8427.00	PHILIPS_CO	RC 22 H	
R298	RG 220R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6953.00	DRALORIC	CR 0603	
R299	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R300	RG 82,5 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9052.00	DRALORIC	CR 0603	
R301	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
R302	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R303	RG 121 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9498.00	DRALORIC	CR 0603	
R304	RG 121 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9498.00	DRALORIC	CR 0603	
R305	RG 3,32KOH+-0,1%TK25 1206 SMD-RESISTOR EIA1206	0009.7772.00	PHILIPS_CO	MPC 01	
R306	RG 3K3 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7014.00	DRALORIC	CR 0603	
. 311 R312	RG 680R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6982.00	PHILIPS_CO	RC 22 H	
R313	RG 680R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6982.00	PHILIPS_CO	RC 22 H	


1GPK	887 3PLU	ÄI	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	26+	

5.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	Contained in
R314	RG 3K3 +-1% TK100 0603	0009.7014.00	DRALORIC	CR 0603	
..317	SMD RESISTOR EIA0603				
R318	RG 1K0 +-1% TK100 0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R319	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R320	RG 825R +-1% TK100 0603	0010.8391.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R321	RG 470R +-1% TK100 0603	0009.6976.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R322	RG 470R +-1% TK100 0603	0009.6976.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R323	RG 1K5 +-1% TK100 0603	0009.6999.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R324	RG 3K3 +-1% TK100 0603	0009.7014.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R325	RG 5K62 +-1% TK100 0603	0010.8433.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R326	RG 51,0 OHM+-1%TK100 0603	0009.9030.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R327	RG 470R +-1% TK100 0603	0009.6976.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R328	RG 4K7 +-1% TK100 0603	0009.7020.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R329	RG 470R +-1% TK100 0603	0009.6976.00	DRALORIC	CR 0603	
..331	SMD RESISTOR EIA0603				
R332	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R333	RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R334	RG 470R +-1% TK100 0603	0009.6976.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R335	RG 470R +-1% TK100 0603	0009.6976.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R336	RG 0-OHM WIDERSTAND 0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
	SMD RESISTOR EIA0603				
R337	RG 220R +-1% TK100 0603	0009.6953.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R338	RG 220R +-1% TK100 0603	0009.6953.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R339	RG 150R +-1% TK100 0603	0009.6947.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R340	RG 825R +-1% TK100 0603	0010.8391.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R341	RG 470R +-1% TK100 0603	0009.6976.00	DRALORIC	CR 0603	
..343	SMD RESISTOR EIA0603				
R344	RG 20K +-1% TK100 0603	0010.9100.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R345	RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R346	RG 6K8 +-1% TK100 0603	0009.7037.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R347	RG 4K7 +-1% TK100 0603	0009.7020.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R348	RG 20,0KOH+-0,1%TK25 1206	0009.7643.00	PHILIPS_CO	MPC 01	
	SMD-RESISTOR				
R349	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R350	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R351	RG 30,1 OHM+-1%TK100 0603	0009.9081.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R352	RG 100R +-1% TK100 0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R353	RG 30,1 OHM+-1%TK100 0603	0009.9081.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R354	RG 825R +-1% TK100 0603	0010.8391.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R355	RG 150R +-1% TK100 0603	0009.6947.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R356	RG 18,2KOH+-0,1%TK25 1206	0009.7637.00	PHILIPS_CO	MPC 01	
	SMD-RESISTOR				
R357	RG 110 OHM+-1%TK100 0603	0009.9481.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				
R358	RG 150R +-1% TK100 0603	0009.6947.00	PHILIPS_CO	RC 22 H	
	SMD RESISTOR EIA0603				
R359	RG 182 OHM+-1%TK100 0603	0009.9130.00	DRALORIC	CR 0603	
	SMD RESISTOR EIA0603				


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHM & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	27+

wir uns alle Rechte vor.


Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
R360	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R361	RG 392K+-1% TK100 RESISTOR	0603	1097.6528.00	DRALORIC CR 0603	
R362	RG 330K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7114.00	PHILIPS_CO RC 22 H	
R363	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6918.00	DRALORIC CR 0603	
R364	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R365	RG 68R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6930.00	DRALORIC CR 0603	
R366	RG 82,5 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9052.00	DRALORIC CR 0603	
R367	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R368	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R369	RG 100 OHM+-0,1%TK25 SMD-RESISTOR	1206	0009.8033.00	PHILIPS_CO MPC 01	
R377	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R378	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R379	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6918.00	DRALORIC CR 0603	
R380	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R381	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R382	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6918.00	DRALORIC CR 0603	
R383	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R384	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R385	RG 1,0 KO +-0,1%TK25 SMD-RESISTOR	1206	0009.7595.00	PHILIPS_CO MPC 01	
R386	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
R387	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R388	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R389	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R390	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R391	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R392	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R393	RG 137 OHM+-0,1%TK25 SMD-RESISTOR EIA1206	1206	0009.9252.00	PHILIPS_CO MPC 01	
R394	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R395	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R396	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R397	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R398	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R399	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R400	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R401	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R402	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R403	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R404	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R407	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H	

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	28+

5.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R408	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R409	RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.7666.00	PHILIPS_CO MPC 01	
R409	NUR VAR/ONLY MOD: 02 RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.7666.00	PHILIPS_CO MPC 01	
R409	NUR VAR/ONLY MOD: 04 RG 10,0KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.7666.00	PHILIPS_CO MPC 01	
R409	NUR VAR/ONLY MOD: 06 RG 7,5KOHM+-1%TK100 RG CHIP RESISTOR	1206	RG 0007.0764.00	PHILIPS_CO RC02	
R410	NUR VAR/ONLY MOD: 08 RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R411	RG 470K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7120.00	PHILIPS_CO RC 22 H	
R412	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R413	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R414	RG 4R75 +-1% TK250 SMD RESISTOR EIA0603	0603	0010.8379.00	PHILIPS_CO RC 22 H	
R415	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R416	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R417	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R418	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H	
R419	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H	
R420	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO RC 22 H	
R421	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO RC 22 H	
R422	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R423	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R430	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R431	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R432	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
R433	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R434	RG 5K11 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6334.00	PHILIPS_CO RC 22 H	
R435	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO RC 22 H	
R436	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8410.00	PHILIPS_CO RC 22 H	
R437	RG 301R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9123.00	PHILIPS_CO RC 22 H	
R438	RG 301R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9123.00	PHILIPS_CO RC 22 H	
R439	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R440	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R441	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R442	RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R443	RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R444	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R445	RG 150K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7095.00	PHILIPS_CO RC 22 H	
R446	RG 470K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7120.00	PHILIPS_CO RC 22 H	
R447	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHM & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	29+

95.0026-0893

wir uns alle Rechte vor.


Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Manufacturer Designation	contained in
R448	RG 8R25 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9117.00 DRALORIC	CR 0603
R449	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00 PHILIPS_CO	RC 22 H
R450	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00 PHILIPS_CO	RC 22 H
R451	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00 PHILIPS_CO	RC 22 H
R452	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00 PHILIPS_CO	RC21 O OHM
R453	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00 PHILIPS_CO	RC21 O OHM
R454	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00 PHILIPS_CO	RC 22 H
R456	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00 DRALORIC	CR 0603
R457	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00 PHILIPS_CO	RC 22 H
R458	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00 PHILIPS_CO	RC 22 H
R459	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00 PHILIPS_CO	RC 22 H
R460	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00 PHILIPS_CO	RC 22 H
R461	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00 PHILIPS_CO	RC 22 H
R462	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00 PHILIPS_CO	RC21 O OHM
R463	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00 PHILIPS_CO	RC21 O OHM
R464	RG 68R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6930.00 DRALORIC	CR 0603
R465	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00 DRALORIC	CR 0603
R466	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00 PHILIPS_CO	RC 22 H
R467	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00 PHILIPS_CO	RC 22 H
R468	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00 PHILIPS_CO	RC 22 H
R469	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00 DRALORIC	CR 0603
R470	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00 PHILIPS_CO	RC 22 H
R471	RG 301R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9123.00 PHILIPS_CO	RC 22 H
R472	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00 PHILIPS_CO	RC 22 H
R473	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00 DRALORIC	CR 0603
R474	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00 DRALORIC	CR 0603
R475	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00 PHILIPS_CO	RC 22 H
R476	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00 PHILIPS_CO	RC21 O OHM
R477	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00 PHILIPS_CO	RC 22 H
R478	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00 PHILIPS_CO	RC 22 H
R479	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00 DRALORIC	CR 0603
R480	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00 PHILIPS_CO	RC 22 H
R481	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00 PHILIPS_CO	RC 22 H
R482	RG 4R75 +-1% TK250 SMD RESISTOR EIA0603	0603	0010.8379.00 PHILIPS_CO	RC 22 H
R483	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00 DRALORIC	CR 0603
R484	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00 PHILIPS_CO	RC 22 H
R485	RG 18R2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8385.00 DRALORIC	CR 0603
R486	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00 PHILIPS_CO	RC 22 H
R487	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00 DRALORIC	CR 0603
R488	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00 DRALORIC	CR 0603

1GPK	887 3PLU	ÄI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	30+	

15.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R489	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7072.00 PHILIPS_CO RC 22 H	
R490	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8404.00 PHILIPS_CO RC 22 H	
R491	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5340.00 PHILIPS_CO RC 22 H	
R492	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5363.00 DRALORIC CR 0603	
R493	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8391.00 PHILIPS_CO RC 22 H	
R494	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603		0010.9300.00 PHILIPS_CO RC 22 H	
R495	RG 392R+-1% TK100 SMD RESISTOR EIA0603	0603		0010.9300.00 PHILIPS_CO RC 22 H	
R496	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8427.00 PHILIPS_CO RC 22 H	
R497	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8433.00 DRALORIC CR 0603	
R498	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5363.00 DRALORIC CR 0603	
R499	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00 PHILIPS_CO RC 22 H	
R500	RG 6K8 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7037.00 DRALORIC CR 0603	
R501	RG 100,0K0+-0,1%TK25 SMD-RESISTOR EIA1206	1206		0010.0655.00 PHILIPS_CO MPC 01	
R502	RG 100,0K0+-0,1%TK25 SMD-RESISTOR EIA1206	1206		0010.0655.00 PHILIPS_CO MPC 01	
R503	RG 4,75KOH+-0,1%TK25 SMD-RESISTOR EIA1206	1206		0009.8856.00 PHILIPS_CO MPC 01	
R504	RG 2,49KOH+-0,1%TK25 SMD-RESISTOR EIA1206	1206		0009.8133.00 PHILIPS_CO MPC 01	
R505	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6901.00 DRALORIC CR 0603	
R506	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5340.00 PHILIPS_CO RC 22 H	
R507	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8391.00 PHILIPS_CO RC 22 H	
R508	RG 432R +-1%TK100 SMD RESISTOR EIA0603	0603		0009.9098.00 DRALORIC CR 0603	
R509	RG 432R +-1%TK100 SMD RESISTOR EIA0603	0603		0009.9098.00 DRALORIC CR 0603	
R510	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8391.00 PHILIPS_CO RC 22 H	
R511	RG 162 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9500.00 PHILIPS_CO RC 22 H	
R512	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5334.00 PHILIPS_CO RC 22 H	
R513	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6953.00 DRALORIC CR 0603	
R514	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R515	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7072.00 PHILIPS_CO RC 22 H	
R516	RS 0,25W 5KOHM +-20% POTENTIOMETER	SMD	RS	0007.9632.00 BI_TECHNOL 23 B R... TR	
R517	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5363.00 DRALORIC CR 0603	
R518	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5363.00 DRALORIC CR 0603	
R519	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6960.00 DRALORIC CR 0603	
R520	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7043.00 DRALORIC CR 0603	
R521	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7043.00 DRALORIC CR 0603	
R522	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00 PHILIPS_CO RC 22 H	
R523	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5334.00 PHILIPS_CO RC 22 H	
R524	RG 121 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9498.00 DRALORIC CR 0603	
..527	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5340.00 PHILIPS_CO RC 22 H	
R528	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6953.00 DRALORIC CR 0603	
R529	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6953.00 DRALORIC CR 0603	
R530	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6953.00 DRALORIC CR 0603	


1GPK	887 3PLU	Är	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	31+

95.0026-0693

wir uns alle Rechte vor.

Kennz. Comp. No.	Bezeichnung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
R531	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R532	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC	CR 0603	
R533	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO	RC 22 H	
R534	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO	RC 22 H	
R535	RG 10R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5328.00	PHILIPS_CO	RC 22 H	
R536	RG 560R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9630.00	DRALORIC	CR 0603	
.539	R540	RG 10K +-1% TK100 0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H
R541	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R542	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R543	RG 47K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7072.00	PHILIPS_CO	RC 22 H	
R544	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R545	RG 1,62KOHM+-1%TK100 1206 CHIP RESISTOR	RG 0006.9997.00	DRALORIC	CR 1206	
R546	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CO	RC 22 H	
.548	R549	RG 4K7 +-1% TK100 0603	0009.7020.00	PHILIPS_CO	RC 22 H
R550	RG 1,62KOHM+-1%TK100 1206 CHIP RESISTOR	RG 0006.9997.00	DRALORIC	CR 1206	
R551	RG 8R25 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9117.00	DRALORIC	CR 0603	
R552	RG 8R25 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9117.00	DRALORIC	CR 0603	
R553	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R554	RG 5R62 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9100.00	DRALORIC	CR 0603	
R555	RG 12K1 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8462.00	DRALORIC	CR 0603	
R556	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603	
.559	R560	RG 47R +-1% TK100 0603	0009.6924.00	PHILIPS_CO	RC 22 H
R561	RG 20,0KOH+-0,1%TK25 1206 SMD-RESISTOR	0009.7643.00	PHILIPS_CO	MPC 01	
.563	R564	RG 1K0 +-1% TK100 0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H
R565	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CO	RC 22 H	
R566	RG 1,0 KO +-0,1%TK25 1206 SMD-RESISTOR	0009.7595.00	PHILIPS_CO	MPC 01	
R567	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
.571	R572	RG 3,16KOH+-0,1%TK25 1206	0009.8204.00	PHILIPS_CO	MPC 01
R573	RG 3,12KOH+-0,1%TK25 1206 RESISTOR	0010.2735.00	PHILIPS_CO	MPC 01	
R574	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
.585	R586	RG 10R +-1% TK100 0603	RG 0009.5328.00	PHILIPS_CO	RC 22 H
R587	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R588	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R589	RG 51,0 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9030.00	DRALORIC	CR 0603	
R590	RG 20,0KOH+-0,1%TK25 1206 SMD-RESISTOR	0009.7643.00	PHILIPS_CO	MPC 01	
R591	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R592	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R593	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R594	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
.596					


5.0028-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	32+

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R597	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R598	RG 1KO +-1% TK100	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
.607	SMD RESISTOR EIA0603				
R608	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R609	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R610	RG 10R +-1% TK100	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
.613	SMD RESISTOR EIA0603				
R614	RG 1KO +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R615	RG 10R +-1% TK100	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R616	SMD RESISTOR EIA0603 RG 470R +-1% TK100	0603	0009.6976.00	DRALORIC CR 0603	
R617	SMD RESISTOR EIA0603 RG 1KO +-1% TK100	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R618	SMD RESISTOR EIA0603 RG 1KO +-1% TK100	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R619	SMD RESISTOR EIA0603 RG 30K1+-1% TK100	0603	0010.9281.00	PHILIPS_CO RC 22 H	
R620	SMD RESISTOR EIA0603 RG 20K +-1% TK100	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R621	SMD RESISTOR EIA0603 RG 470R +-1% TK100	0603	0009.6976.00	DRALORIC CR 0603	
R622	SMD RESISTOR EIA0603 RG 30K1+-1% TK100	0603	0010.9281.00	PHILIPS_CO RC 22 H	
R623	SMD RESISTOR EIA0603 RG 47K +-1% TK100	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R624	SMD RESISTOR EIA0603 RG 30K1+-1% TK100	0603	0010.9281.00	PHILIPS_CO RC 22 H	
R625	SMD RESISTOR EIA0603 RG 0-OHM WIDERSTAND	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R626	SMD RESISTOR EIA0603 RG 0-OHM WIDERSTAND	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R628	SMD RESISTOR EIA0603 RG 1KO +-1% TK100	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R629	SMD RESISTOR EIA0603 RG 5R62 +-1% TK250	0603	0009.9100.00	DRALORIC CR 0603	
R630	SMD RESISTOR EIA0603 RG 1KO +-1% TK100	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
.637	SMD RESISTOR EIA0603				
R638	RG 1,1KOHM+-0,1%TK25 SMD-RESISTOR EIA1206	1206	0009.8127.00	PHILIPS_CO MPC 01	
R639	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R640	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R641	RG 1KO +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R642	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R643	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R644	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R645	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R646	RG 1KO +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R647	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8433.00	DRALORIC CR 0603	
R648	RG 1KO +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
.650	SMD RESISTOR EIA0603				
R651	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R652	RG 1KO +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
.656	SMD RESISTOR EIA0603				
R657	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R658	RG 1KO +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R659	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R660	RG 1KO +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
.662	SMD RESISTOR EIA0603				
R663	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8433.00	DRALORIC CR 0603	


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0026-0593

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	33+

WIR ÜBEN ALLE RECHTE VOR.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Beschreibung Designation	contained in
R664	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R665	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R666	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R667	RG 27,4KOH+-0,1%TK25 SMD-RESISTOR EIA1206	1206	0009.7743.00	PHILIPS_CO MPC 01	
R668	RG 560R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9630.00	DRALORIC CR 0603	
R669	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	F
R669	RG 330K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7114.00	PHILIPS_CO RC 22 H	
R670	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R671	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R672	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8433.00	DRALORIC CR 0603	
R674	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R676	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R677	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	PHILIPS_CO RC 22 H	
R678	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	PHILIPS_CO RC 22 H	
R679	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R680	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R681	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R682	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R683	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R684	RG 220K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7108.00	DRALORIC CR 0603	
R685	RG 150K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7095.00	PHILIPS_CO RC 22 H	
R686	RG 560R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9630.00	DRALORIC CR 0603	
R687	RG 1,82KOHM+-1%TK100 RESISTOR CHIP	1206	RG 0007.5720.00	PHILIPS_CO RC02	
R688	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R689	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R690	RG 1,82KOHM+-1%TK100 RESISTOR CHIP	1206	RG 0007.5720.00	PHILIPS_CO RC02	
R691	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R692	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R693	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R694	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R695	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R710	RG 560R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9630.00	DRALORIC CR 0603	
R711	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R712	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R713	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R714	RG 8K25 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8456.00	PHILIPS_CO RC 22 H	
R715	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R716	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R717	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7066.00	PHILIPS_CO RC 22 H	
R718	RG 4,02KOH+-0,1%TK25 SMD-RESISTOR EIA1206	1206	0009.7814.00	PHILIPS_CO MPC 01	


1GPK	887 3PLU	Äl	Datum Date	Sachteiliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	34+	

JUN 94 U002

Für diese Unterlage behalten wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R720	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603		0010.9100.00	PHILIPS_CO RC 22 H
R721	RG 3,48KOH+-0,1%TK25 RESISTOR	1206		0010.2870.00	PHILIPS_CO MPC 01
R722	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7008.00	PHILIPS_CO RC 22 H
.726	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R727	RG 392K+-1% TK100 RESISTOR	0603		1097.6528.00	DRALORIC CR 0603
R728	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R730	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603		0009.9100.00	DRALORIC CR 0603
R731	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00	PHILIPS_CO RC 22 H
R732	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603		0009.9369.00	PHILIPS_CO RC21 0 DHM
R733	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R734	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R735	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R736	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R737	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R738	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R739	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R740	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R741	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R742	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R743	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R744	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R745	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R746	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R747	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R748	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R749	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
.757	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8410.00	PHILIPS_CO RC 22 H
R758	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603		0010.8410.00	PHILIPS_CO RC 22 H
R759	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R760	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG	0009.5357.00	PHILIPS_CO RC 22 H
.763	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R764	RG 2,0KOHM+-0,1%TK25 SMD-RESISTOR	1206		0009.7608.00	PHILIPS_CO MPC 01
R765	RG 5,36KOH+-0,1%TK25 RESISTOR	1206		0010.2912.00	PHILIPS_CO MPC 01
R766	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R767	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603		0009.6976.00	DRALORIC CR 0603
R768	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
.772	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603		0009.7020.00	PHILIPS_CO RC 22 H
R773	RG 27,4KOH+-0,1%TK25 SMD-RESISTOR EIA1206	1206		0009.7743.00	PHILIPS_CO MPC 01
R774	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603		0009.9000.00	PHILIPS_CO RC 22 H
R775					
R776					
R777					

95.0026-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	35+

wir uns alle Rechte vor.


Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
R778	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R779	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R780	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9000.00	PHILIPS_CO RC 22 H	
R781	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9000.00	PHILIPS_CO RC 22 H	
R782	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R783	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R784	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R785	RG 432R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9098.00	DRALORIC CR 0603	
R786	RG 432R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9098.00	DRALORIC CR 0603	
R787	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R788	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R789	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R790	RG 100,0K0+-0,1%TK25 SMD-RESISTOR EIA1206	1206	0010.0655.00	PHILIPS_CO MPC 01	
R791	RG 20,0K0H+-0,1%TK25 SMD-RESISTOR	1206	0009.7643.00	PHILIPS_CO MPC 01	
..794	SMD-RESISTOR				
R795	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
..803	SMD RESISTOR EIA0603				
R804	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R805	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R806	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R807	RS 0,25W 2KOHM +-20% POTENTIOMETER	SMD	RS 0007.9626.00	BI_TECHNOL 23 B R... TR	
R808	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R809	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R810	RG 18R2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8385.00	DRALORIC CR 0603	
R811	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R812	RG 39,2KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.8027.00	PHILIPS_CO MPC 01	
R813	RG 39,2KOH+-0,1%TK25 SMD-RESISTOR	1206	0009.8027.00	PHILIPS_CO MPC 01	
R814	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9000.00	PHILIPS_CO RC 22 H	
R815	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9000.00	PHILIPS_CO RC 22 H	
R816	RG 1,3KOHM+-0,1%TK25 RESISTOR	1206	0010.1968.00	PHILIPS_CO MPC 01	
R817	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R818	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R819	RG 6K8 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7037.00	DRALORIC CR 0603	
R820	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
R821	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R822	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R823	RG 68R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6930.00	DRALORIC CR 0603	
R824	RG 56R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9646.00	DRALORIC CR 0603	
R825	RG 35,7 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9000.00	PHILIPS_CO RC 22 H	
..828	SMD RESISTOR EIA0603				
R829	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R830	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	

1GPK	887 3PLU	ÄI	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	36+

15.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R831	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
R832	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R833	RG 56K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9117.00	DRALORIC CR 0603	
R834	RG 68,1KOH+-0,1%TK25 RESISTOR	1206	0010.2935.00	PHILIPS_CD MPC 01	
R835	RG 4,02KOH+-0,1%TK25 SMD-RESISTOR EIA1206	1206	0009.7814.00	PHILIPS_CD MPC 01	
R836	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CD RC 22 H	
R837	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7066.00	PHILIPS_CD RC 22 H	
R838	RG 33K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7066.00	PHILIPS_CD RC 22 H	
R839	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R840	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CD RC 22 H	
. .846	R847	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CD RC 22 H
R848	RG 121 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9498.00	DRALORIC CR 0603	
R849	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CD RC 22 H	
R850	RG 121 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9498.00	DRALORIC CR 0603	
R851	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R852	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9130.00	DRALORIC CR 0603	
R853	RG 121 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9498.00	DRALORIC CR 0603	
. .855	R856	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603
R857	RG 121 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9498.00	DRALORIC CR 0603	
R858	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
R859	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CD RC 22 H	
R860	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CD RC 22 H	
R861	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R862	RG 432R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9098.00	DRALORIC CR 0603	
R863	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6918.00	DRALORIC CR 0603	
R864	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6918.00	DRALORIC CR 0603	
R865	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R866	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R867	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CD RC 22 H	
R868	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CD RC21 0 OHM	
R870	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CD RC 22 H	
R871	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R872	RG 15K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7043.00	DRALORIC CR 0603	
R873	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CD RC 22 H	
R874	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CD RC21 0 OHM	
R875	RG 33R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6918.00	DRALORIC CR 0603	
R876	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CD RC21 0 OHM	
R877	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R878	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CD RC21 0 OHM	
. .883					


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	Äi	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	37+

95.0026-0693

wir uns alle Rechte vor.


Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
R884	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R885	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R886	RG 6K8 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7037.00	DRALORIC CR 0603	
R887	RG 1K21 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0010.9817.00	PHILIPS_CO RC 22 H	
R888	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R889	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R890	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R891	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R895	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R896	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R897	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R898	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R899	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R900	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R901	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R902	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R903	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R904	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R905	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R906	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R907	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R908	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R909	RG 4R75 +-1% TK250 SMD RESISTOR EIA0603	0603	0010.8379.00	PHILIPS_CO RC 22 H	
R910	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R911	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R913	RG 511R +-1%TK100 SMD RESISTOR EIA0603	0603	1097.6470.00	PHILIPS_CO RC 22 H	
R914	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R915	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R916	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R917	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R918	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R919	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R920	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R921	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R922	RG 15R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6899.00	DRALORIC CR 0603	
R923	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R924	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R925	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R926	RG 5R62 +-1% TK250 SMD RESISTOR EIA0603	0603	0009.9100.00	DRALORIC CR 0603	
R927	RG 22R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6901.00	DRALORIC CR 0603	
R928	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	38+

95.0026-0693

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R929	RS 0,25W10KOHM +-20% SMD POTENTIOMETER	RS 0007.9649.00	BI_TECHNOL	23 B R... TR	
R930	RS 0,25W50KOHM +-20% SMD POTENTIOMETER	RS 0007.9661.00	BI_TECHNOL	23 B R... TR	
R931	RG 182 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9130.00	DRALORIC	CR 0603	
R932	RG 130R +-1% TK100 0603 SMD RESISTOR EIA0603	1078.3110.00	DRALORIC	CR 0603	
R933	RG 560R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9630.00	DRALORIC	CR 0603	
R934	RG 560R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9630.00	DRALORIC	CR 0603	
R935	RG 150 OHM+-0,1%TK25 1206 SMD-RESISTOR EIA1206	0009.8091.00	PHILIPS_CO	MPC 01	
R936	RG 8R25 +-1% TK250 0603 SMD RESISTOR EIA0603	0009.9117.00	DRALORIC	CR 0603	
R937	RG 68K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7089.00	PHILIPS_CO	RC 22 H	
R938	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R939	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R940	RG 470K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7120.00	PHILIPS_CO	RC 22 H	
R941	RG 150K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7095.00	PHILIPS_CO	RC 22 H	
R942	RG 56R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9646.00	DRALORIC	CR 0603	
R942	NUR VAR/ONLY MOD: 02 RG 56R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9646.00	DRALORIC	CR 0603	
R942	NUR VAR/ONLY MOD: 04 RG 56R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.9646.00	DRALORIC	CR 0603	
R942	NUR VAR/ONLY MOD: 06 RG 47R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6924.00	PHILIPS_CO	RC 22 H	
R943	NUR VAR/ONLY MOD: 08 RG 51,0 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9030.00	DRALORIC	CR 0603	
R944	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC	CR 0603	
R945	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R946	RG 68K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7089.00	PHILIPS_CO	RC 22 H	
R947	RG 4K7 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7020.00	PHILIPS_CO	RC 22 H	
..955	SMD RESISTOR EIA0603				
R956	RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
..958	SMD RESISTOR EIA0603				
R959	RG 82,5 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9052.00	DRALORIC	CR 0603	
..962	SMD RESISTOR EIA0603				
R963	RG 15K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7043.00	DRALORIC	CR 0603	
R964	RG 33K +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7066.00	PHILIPS_CO	RC 22 H	
R965	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R966	RG 30,1 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9081.00	PHILIPS_CO	RC 22 H	
R967	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H	
R968	RS 0,25W500KOHM+-20% SMD POTENTIOMETER	RS 0007.9690.00	BI_TECHNOL	23 B R... TR	
R969	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R970	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R971	RG 1,82KOHM+-1%TK100 1206 RESISTOR CHIP	RG 0007.5720.00	PHILIPS_CO	RC02	
R972	RG 1,82KOHM+-1%TK100 1206 RESISTOR CHIP	RG 0007.5720.00	PHILIPS_CO	RC02	
R973	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO	RC 22 H	
R974	RG 270R +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9581.00	PHILIPS_CO	RC 22 H	
R975	RG 12K1 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8462.00	DRALORIC	CR 0603	


Für diese Unterlage behalten wir uns alle Rechte vor.

1GPK	887 3PLU	Äi	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	39+

95.0026-0693

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Manufacturer	Designation	contained in
R976	RG 220R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6953.00	DRALORIC CR 0603	
R977	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO RC 22 H	
R978	RG 1K82 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8404.00	PHILIPS_CO RC 22 H	
R979	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R980	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8433.00	DRALORIC CR 0603	
R981	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R982	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R983	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R984	RG 47R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R985	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R986	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R987	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R988	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R989	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R990	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R991	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R992	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R993	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R994	RG 270R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9581.00	PHILIPS_CO RC 22 H	
R996	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R997	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R998	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R999	RG 150R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R999	RG 150R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 02	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R999	RG 150R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 04	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R999	RG 150R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 06	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R1000	RG 150R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 08	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R1000	RG 150R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 02	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R1000	RG 150R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 04	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R1000	RG 150R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 06	0603	0009.6947.00	PHILIPS_CO RC 22 H	
R1000	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 06	0603	0009.9130.00	DRALORIC CR 0603	
R1000	RG 182 OHM+-1%TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 08	0603	0009.9130.00	DRALORIC CR 0603	
R1001	RG 47R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 02	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R1001	RG 47R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 04	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R1001	RG 47R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 06	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R1001	RG 47R +-1% TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 08	0603	0009.6924.00	PHILIPS_CO RC 22 H	
R1001	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 06	0603	0009.9081.00	PHILIPS_CO RC 22 H	
R1001	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603 NUR VAR/ONLY MOD: 08	0603	0009.9081.00	PHILIPS_CO RC 22 H	


1GPK	887 3PLU	Äi	Datum Date	Schalttailliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	40+

5.0026-0693

Für diese Unterlage behalten
wir uns alle Rechte vor.


Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R1002	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R1003	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R1004	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1005	RG 220R +-1% TK100	0603	0009.6953.00	DRALORIC CR 0603	
..1010	SMD RESISTOR EIA0603				
R1011	RG 30,1 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9081.00	PHILIPS_CO RC 22 H	
R1012	RG 432R +-1%TK100 SMD RESISTOR EIA0603	0603	0009.9098.00	DRALORIC CR 0603	
R1013	RG 150R +-1% TK100	0603	0009.6947.00	PHILIPS_CO RC 22 H	
..1018	SMD RESISTOR EIA0603				
R1019	RG 82,5 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9052.00	DRALORIC CR 0603	
R1020	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R1021	RG 4R75 +-1% TK250 SMD RESISTOR EIA0603	0603	0010.8379.00	PHILIPS_CO RC 22 H	
R1022	RG 56R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.9646.00	DRALORIC CR 0603	
R1023	RG 1K21 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0010.9817.00	PHILIPS_CO RC 22 H	
R1024	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R1025	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R1026	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R1027	RG 3K3 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7014.00	DRALORIC CR 0603	
R1028	RG 470R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6976.00	DRALORIC CR 0603	
R1029	RG 825R +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8391.00	PHILIPS_CO RC 22 H	
R1030	RS 0,25W 1KOHM +-20% SMD RG POTENTIOMETER		RS 0007.9610.00	BI_TECHNOL 23 B R... TR	
R1031	RG 1K5 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6999.00	DRALORIC CR 0603	
R1032	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1033	RG 47K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7072.00	PHILIPS_CO RC 22 H	
R1034	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R1035	RG 8K25 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8456.00	PHILIPS_CO RC 22 H	
R1036	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R1037	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R1038	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R1039	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R1040	RG 10R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5328.00	PHILIPS_CO RC 22 H	
R1041	RG 39K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9823.00	PHILIPS_CO RC 22 H	
R1042	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	
R1043	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
..1050	SMD RESISTOR EIA0603				
R1051	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R1052	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R1053	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R1054	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1055	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1056	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1057	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	

95.0026-0693

1GPK	887 3PLU	Ät	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	41+

wir uns alle Rechte vor.


Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Bezeichnung Designation	contained in
R1058	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1059	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R1060	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R1061	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R1062	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1063	RG 220K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7108.00	DRALORIC CR 0603	
R1064	RG 220K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7108.00	DRALORIC CR 0603	
R1065	RG 220K +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7108.00	DRALORIC CR 0603	
R1066	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1067	RG 20K +-1% TK100 SMD RESISTOR EIA0603	0603	0010.9100.00	PHILIPS_CO RC 22 H	
R1068	RG 18K2+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9317.00	DRALORIC CR 0603	
R1069	RG 330R +-1% TK100 SMD RESISTOR EIA0603	0603	0009.6960.00	DRALORIC CR 0603	
R1070	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R1071	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1072	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1073	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R1074	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1075	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
..1078	SMD RESISTOR EIA0603				
R1079	RG 5K62 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8433.00	DRALORIC CR 0603	
..1082	SMD RESISTOR EIA0603				
R1083	RG 100 OHM+-0,1%TK25 SMD-RESISTOR	1206	0009.8033.00	PHILIPS_CO MPC 01	
..1086	SMD-RESISTOR				
R1087	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
..1094	SMD RESISTOR EIA0603				
R1095	RG 100R +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5334.00	PHILIPS_CO RC 22 H	
R1096	RG 2K2 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7008.00	PHILIPS_CO RC 22 H	
R1097	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
..1100	SMD RESISTOR EIA0603				
R1101	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R1102	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 0 OHM	
R1103	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
..1106	SMD RESISTOR EIA0603				
R1107	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R1108	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	PHILIPS_CO RC 22 H	
R1109	RG 2K0 +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6328.00	PHILIPS_CO RC 22 H	
R1110	RG 3K01+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9298.00	DRALORIC CR 0603	
R1111	RS 0,25W50KOHM +-20% POTENTIOMETER	SMD	RS 0007.9661.00	BI_TECHNOL 23 B R... TR	
R1112	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R1113	RG 51,0 OHM+-1%TK100 SMD RESISTOR EIA0603	0603	0009.9030.00	DRALORIC CR 0603	
R1114	RG 200R +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6386.00	DRALORIC CR 0603	
R1115	RG 200R +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6386.00	DRALORIC CR 0603	
R1116	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R1117	RG 3K92 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8427.00	PHILIPS_CO RC 22 H	
R1118	RG 100K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5363.00	DRALORIC CR 0603	

1GPK	887 3PLU	Äi	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	42+	

35.0026-0893

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
R1119	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC	CR 0603	
R1120	RG 30,1 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9081.00	PHILIPS_CO	RC 22 H	
R1121	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC	CR 0603	
R1122	RG 20K +-1% TK100 0603 SMD RESISTOR EIA0603	0010.9100.00	PHILIPS_CO	RC 22 H	
R1123	RG 35,7 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9000.00	PHILIPS_CO	RC 22 H	
R1124	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R1125	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R1126	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R1128	..1128				
R1129	RK SMD-HEISSEL.100K 1206 SMD-NTC-RESISTOR	0008.9236.00	SIEMENS	B57621-C104-J	
R1130	RG 12K1 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8462.00	DRALORIC	CR 0603	
R1131	RG 12K1 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8462.00	DRALORIC	CR 0603	
R1132	RG 121 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9498.00	DRALORIC	CR 0603	
R1136	..1136				
R1137	RG 392K+-1% TK100 0603 RESISTOR	1097.6528.00	DRALORIC	CR 0603	
R1138	RG 39R 1% 1W 1218 SMD-RESISTOR	1104.2786.00	PHILIPS_CO	PRC201-39R 1% TK100	
R1139	RG 39R 1% 1W 1218 SMD-RESISTOR	1104.2786.00	PHILIPS_CO	PRC201-39R 1% TK100	
R1140	RG 330R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6960.00	DRALORIC	CR 0603	
R1143	..1143				
R1144	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CO	RC 22 H	
R1145	RG 2K2 +-1% TK100 0603 SMD RESISTOR EIA0603	0009.7008.00	PHILIPS_CO	RC 22 H	
R1146	RG 1K0 +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5340.00	PHILIPS_CO	RC 22 H	
R1149	..1149				
R1150	RG 3K92 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8427.00	PHILIPS_CO	RC 22 H	
R1151	RG 3K92 +-1% TK100 0603 SMD RESISTOR EIA0603	0010.8427.00	PHILIPS_CO	RC 22 H	
R1152	RG 301R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9123.00	PHILIPS_CO	RC 22 H	
R1153	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R1154	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO	RC 22 H	
R1155	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO	RC 22 H	
R1156	RG 200R +-1% TK100 0603 SMD RESISTOR EIA0603	1097.6386.00	DRALORIC	CR 0603	
R1157	RG 200R +-1% TK100 0603 SMD RESISTOR EIA0603	1097.6386.00	DRALORIC	CR 0603	
R1158	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO	RC 22 H	
R1159	RG 150R +-1% TK100 0603 SMD RESISTOR EIA0603	0009.6947.00	PHILIPS_CO	RC 22 H	
R1160	RG 35,7 OHM+-1%TK100 0603 SMD RESISTOR EIA0603	0009.9000.00	PHILIPS_CO	RC 22 H	
R1161	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603	
R1162	RG 432R +-1%TK100 0603 SMD RESISTOR EIA0603	0009.9098.00	DRALORIC	CR 0603	
R1163	NICHT BESTUECKT/NOT FITTED RG 0-OHM WIDERSTAND 0603 SMD RESISTOR EIA0603	0009.9369.00	PHILIPS_CO	RC21 0 OHM	
R1164	RG 100K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5363.00	DRALORIC	CR 0603	
R1165	RG 100R +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5334.00	PHILIPS_CO	RC 22 H	
R1166	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R1183	..1183				
R1184	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	
R1185	RG 10K +-1% TK100 0603 SMD RESISTOR EIA0603	RG 0009.5357.00	PHILIPS_CO	RC 22 H	

Für diese Unterlage behalten wir uns alle Rechte vor.


1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHM & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	43+

95.0026-0693

wir uns alle Rechte vor.


Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
R1186	RG 13K +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6428.00	PHILIPS_CO RC 22 H	
R1187	RG 13K +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6428.00	PHILIPS_CO RC 22 H	
R1188	RG 13K +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6428.00	PHILIPS_CO RC 22 H	
R1189	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R1190	RG 10K +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5357.00	PHILIPS_CO RC 22 H	
R1191	RG 2K74 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8410.00	PHILIPS_CO RC 22 H	
..1194	RG 6K8 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7037.00	DRALORIC CR 0603	
R1195	RG 3R32 +-1% TK250 SMD RESISTOR EIA0603	0603	0010.8362.00	PHILIPS_CO RC 22 H	
..1198	RG 3R32 +-1% TK250 SMD RESISTOR EIA0603	0603	0010.8362.00	PHILIPS_CO RC 22 H	
R1199	RG 3R32 +-1% TK250 SMD RESISTOR EIA0603	0603	0010.8362.00	PHILIPS_CO RC 22 H	
R1200	RG 1K0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5340.00	PHILIPS_CO RC 22 H	
R1201	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
..1203	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R1204	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
..1206	RG 4K7 +-1% TK100 SMD RESISTOR EIA0603	0603	0009.7020.00	PHILIPS_CO RC 22 H	
R1207	RK SMD-HEISSL.100K SMD-NTC-RESISTOR	1206	0008.9236.00	SIEMENS B57621-C104-J	
R1208	RG 12K1 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8462.00	DRALORIC CR 0603	
..1212	RG 12K1 +-1% TK100 SMD RESISTOR EIA0603	0603	0010.8462.00	DRALORIC CR 0603	
R1213	RG 18K2+-1% TK100 SMD RESISTOR EIA0603	0603	0010.9317.00	DRALORIC CR 0603	
R1214	RG 0-OHM WIDERSTAND SMD RESISTOR EIA0603	0603	0009.9369.00	PHILIPS_CO RC21 O OHM	
R1215	RG 100R 1% 1W SMD RESISTOR	1218	1104.2740.00	PHILIPS_CO PRC201-100R 1% TK100	
R1216	RG 100R 1% 1W SMD RESISTOR	1218	1104.2740.00	PHILIPS_CO PRC201-100R 1% TK100	
R1217	RG 200R +-1% TK100 SMD RESISTOR EIA0603	0603	1097.6386.00	DRALORIC CR 0603	
R1218	NICHT BESTUECKT/NOT FITTED RS 0,25W10KOHM +-20% SMD POTENTIOMETER		RS 0007.9649.00	BI_TECHNOL 23 B R... TR	
R1219	NICHT BESTUECKT/NOT FITTED RG 182K +-1% TK100 RESISTOR	0603	1093.6175.00	DRALORIC CR 0603	
R1220	RG 1,21KOHM+-1%TK100 CHIP RESISTOR	1206	RG 0006.9968.00	ROEDERSTEI D25	
R1221	RG 1K0 +-1% TK100 CHIP RESISTOR	1206	RG 0006.7271.00	ROEDERSTEI D25	
..1224	RG 0-OHM WIDERSTAND RESISTOR CHIP 0-OHM	1206	RG 0007.5108.00	DRALORIC CR 1206	
R1225	RG 121 OHM+-1%TK100 CHIP RESISTOR	1206	RG 0006.8903.00	PHILIPS_CO RC02	
R1226	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R1250	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R1251	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R1252	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R1253	RG 1M0 +-1% TK100 SMD RESISTOR EIA0603	0603	RG 0009.5370.00	DRALORIC CR 0603	
R1300	RG 51,1 OHM+-1%TK100 CHIP RESISTOR	1206	RG 0006.8810.00	PHILIPS_CO RC02	
R1301	RG 51,1 OHM+-1%TK100 CHIP RESISTOR	1206	RG 0006.8810.00	PHILIPS_CO RC02	
S1	BM SSW-124 SPDTSWITCH GAAS RF-SWITCH		1085.2222.00	STANFORD_M SSW-124	
S2	BM SSW-124 SPDTSWITCH GAAS RF-SWITCH		1085.2222.00	STANFORD_M SSW-124	
T1	DW SYMETRIEUEBERTRAGER		1084.9846.00		
U1	BJ DAC08CS 1X8-DAC D/A-CONVERTER		6024.3137.00	PMI DAC08C(S)	
..3	ER JPS-2-1W 2WEG-L.TEILER 2WAY POWER DIVIDER		1085.1603.00	MINI-CIRCU JPS-2-1W	
U4	BO LM2903D 2XLP COMPAR DUAL		0520.7734.00	SIGNETICS LM2903(D)	
..6	BO LM2903D 2XLP COMPAR DUAL		0520.7734.00	SIGNETICS LM2903(D)	
U7	BO LM2903D 2XLP COMPAR DUAL		0520.7734.00	SIGNETICS LM2903(D)	
U8	BO LM2903D 2XLP COMPAR DUAL		0520.7734.00	SIGNETICS LM2903(D)	

5.0026-0693

1GPK	887 3PLU	Ät	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	44+

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
U9	BM SM4T17-2 MIXER 3,4G MIXER	1085.2068.00	WATKINS-JO	WJ-SM4T17	
U11	BM JMS-2607 MIXER 350M MIXER MODULE	1085.1510.00	MINI-CIRCU	JMS-2607	
U12	BM JMS-2607 MIXER 350M MIXER MODULE	1085.1510.00	MINI-CIRCU	JMS-2607	
V1	AK BSP31 PNP 60V 1A TRAN MEDIUM POWER TRANSISTOR	1085.1755.00	PHILIPS_SE	BSP31	
V2	AK BSP31 PNP 60V 1A TRAN MEDIUM POWER TRANSISTOR	1085.1755.00	PHILIPS_SE	BSP31	
V3	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V4	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V5	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V6	AK BSP31 PNP 60V 1A TRAN MEDIUM POWER TRANSISTOR	1085.1755.00	PHILIPS_SE	BSP31	
V7	AE BZV55/C4V7 0.5W ZDI ZENER DIODE	AE 0006.9822.00	PHILIPS	BZV55B4V7	
V8	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V9	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V10	AE BZV55/C4V7 0.5W ZDI ZENER DIODE	AE 0006.9822.00	PHILIPS	BZV55B4V7	
V11	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V12	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V13	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V14	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V15	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V16	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V17	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V18	AE BZV55/C4V7 0.5W ZDI ZENER DIODE	AE 0006.9822.00	PHILIPS	BZV55B4V7	
V19	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V23	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V24	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V25	AE HSMS2825 1+1 SCHOTTKY SCHOTTKY DIODE PAIR	1010.6214.00	HEWLETT_PA	HSMS2825 L31	
V26	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V27	AE BZV55/C7V5 0.5W ZDI ZENER DIODE	AE 0007.3428.00	PHILIPS_SE	BZV55B7V5	
V28	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
V33	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V34	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
V37	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V44	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V45	AE BAT15-03W SCHOTTKY SCHOTTKY DIODE	1085.1526.00	SIEMENS	BAT15-03W (-A1104)	
V49	AE BZV55/C6V8 0.5W ZDI ZENER DIODE	AE 0006.9868.00	PHILIPS	BZV55/B6V8	
V50	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V51	AE BZV55/C6V8 0.5W ZDI ZENER DIODE	AE 0006.9868.00	PHILIPS	BZV55/B6V8	
V52	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V53	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	

Für diese Unterlage behalten wir uns alle Rechte vor.


1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	45+	

95.0026-0693

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Sachnummer Stock No.	Hersteller Manufacturer	Designation	contained in
V54	AE BZV55/C6V8 0,5W ZDI ZENER DIODE	AE 0006.9868.00	PHILIPS	BZV55/B6V8	
V55	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V56	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V57	AE BZV55/C3V3 0,5W ZDI ZENER DIODE	AE 0006.9800.00	PHILIPS_SE	BZV55B3V3	
V58	AK BCP69-25 P 20V TRANS MEDIUM POWER TRANSISTOR	0008.2002.00	PHILIPS	BCP 69-16 (25)	
V59	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V60	AK BCP68-16 N 20V TRANS MEDIUM POWER TRANSISTOR	0008.2019.00	PHILIPS	BCP68-25	
V61	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V62	AE BZV55/C3V9 0,5W ZDI ZENER DIODE	AE 0006.9816.00	PHILIPS_SE	BZV55B3V9	
V63	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V64	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V65	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V66	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V67	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V68	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V69	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V70	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V71	AE BAR64-04 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V72	AE BZV55/C5V6 0.5W ZDI ZENER DIODE	AE 0006.9845.00	PHILIPS	BZV55B5V6	
V73	AD BAS16 75V UDI HIGH-SPEED DIODE	AD 0007.4924.00	VALVO	BAS16 (A6P)	
V74	AE BZV55/C5V6 0.5W ZDI ZENER DIODE	AE 0006.9845.00	PHILIPS	BZV55B5V6	
V75	AK BFG135 NPN 15V 150MA 7 GHZ WIDEBAND TRANSISTOR	2023.0639.00	PHILIPS	BFG135	
V76	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V77	AK BFG135 NPN 15V 150MA 7 GHZ WIDEBAND TRANSISTOR	2023.0639.00	PHILIPS	BFG135	
V78	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V79	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V80	AK BFG135 NPN 15V 150MA 7 GHZ WIDEBAND TRANSISTOR	2023.0639.00	PHILIPS	BFG135	
V83	AE BZV55/C4V7 0.5W ZDI ZENER DIODE	AE 0006.9822.00	PHILIPS	BZV55B4V7	
V84	AE BZV55/C5V6 0.5W ZDI ZENER DIODE	AE 0006.9845.00	PHILIPS	BZV55B5V6	
V85	AE BZV55/C5V6 0.5W ZDI ZENER DIODE	AE 0006.9845.00	PHILIPS	BZV55B5V6	
V87	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V88	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V89	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V90	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V91	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V92	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V93	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V94	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V97	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V98	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V99	AM SHF0186K 9V GAASF 0.5-4GHZ GAAS FET	1085.1655.00	STANFORD_M	SHF-0186K4230TR	
V100	AE BZV55/C2V7 0,5W ZDI ZENER DIODE	AE 0007.3411.00	PHILIPS_SE	BZV55B2V7	


15 0026-0693

1GPK	887 3PLU	ÄI	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	46+

Comp. No.	Designation	Stock No.	Manufacturer	Designation	contained in
V101	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V102	AM SHFO186K 9V GAASF 0.5-4GHZ GAAS FET	1085.1655.00	STANFORD_M	SHF-O186K4230TR	
V103	AM SHFO186K 9V GAASF 0.5-4GHZ GAAS FET	1085.1655.00	STANFORD_M	SHF-O186K4230TR	
V104	AM SHFO189 12V GAASF 0.5-3.3GHZ GAAS FET	1085.2351.00	STANFORD_M	SHF-O189-TR1	
V105	AE HSMS2825 1+1 SCHOTTKY SCHOTTKY DIODE PAIR	1010.6214.00	HEWLETT_PA	HSMS2825 L31	
V106	AE BAT62-O3W 1X SCHOTTKY DIODE	0856.7095.00	SIEMENS	BAT62-O3W	
V107	AE BAT62-O3W 1X SCHOTTKY DIODE	0856.7095.00	SIEMENS	BAT62-O3W	
V108	AE BAR63-O3W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-O3W (-A1025)	
V109	AE HSMS2825 1+1 SCHOTTKY SCHOTTKY DIODE PAIR	1010.6214.00	HEWLETT_PA	HSMS2825 L31	
V110	AE BAR63-O3W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-O3W (-A1025)	
V111	AK BFG540/X NPN 15V 120MA 9 GHZ WIDEBAND TRANSISTOR	1062.6496.00	PHILIPS	BFG540/X	
V112	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V113	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V114	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V115	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V117	AE BAR64-O4 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V118	AE BAR64-O4 CA 2X PIN SILICON PIN DIODE	1039.1327.00	SIEMENS	BAR6404 (Q62702-A101)	
V119	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V120	AK BCP68-16 N 20V TRANS MEDIUM POWER TRANSISTOR	0008.2019.00	PHILIPS	BCP68-25	
V121	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V122	AE BB535 18,7/2,1P CDI TUNING DIODE	1039.3107.00	SIEMENS	BB535/Q62702-B580	
V130	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V131	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V132	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V133	AE BZV55/C7V5 0,5W ZDI ZENER DIODE	AE 0007.3428.00	PHILIPS_SE	BZV55B7V5	
V134	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V135	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V136	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V138	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V139	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V140	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V141	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V142	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V143	AE BZV55/C5V1 0.5W ZDI ZENER DIODE	AE 0006.9839.00	PHILIPS_SE	BZV55B5V1 (GEG)	
V144	AM SHFO186K 9V GAASF 0.5-4GHZ GAAS FET	1085.1655.00	STANFORD_M	SHF-O186K4230TR	
V145	AK BFP450 NPN 4,5V 100MA RF-TRANSISTOR NPN	4048.1483.00	SIEMENS	BFP450 (-F1590)	
V148	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V149	AK BC860B P 45V 200MA TRANSISTOR	AK 0007.7975.00	MOTOROLA	BC860B	
V150	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V151	AM SST108 N-D 25V JFET JUNCTION FET	6007.3949.00	SILICONIX	SST108	
V152	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V153	AE BZV55/C6V2 0,5W ZDI ZENER DIODE	AE 0006.9851.00	PHILIPS	BZV55B6V2	
V154	AK BFP450 NPN 4,5V 100MA RF-TRANSISTOR NPN	4048.1483.00	SIEMENS	BFP450 (-F1590)	


Für diese Unterlage behalten wir uns alle Rechte vor.

95.0028-0693

1GPK	887 3PLU	Äl	Datum Date	Schaltteilliste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
		68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	47+

wir uns alle Rechte vor.

Kennz. Comp. No.	Benennung Designation	Stock No.	Manufacturer	Designation	contained in
V155	AK BC850B N 45V 200MA TRANSISTOR	AK 0007.7969.00	VALVO	BC850B	
V156	AE BAT62-03W 1X SCHOTTKY DIODE	0856.7095.00	SIEMENS	BAT62-03W	
V157	AE BAT62-03W 1X SCHOTTKY DIODE	0856.7095.00	SIEMENS	BAT62-03W	
V158	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V159	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V160	AE HSMS2825 1+1 SCHOTTKY SCHOTTKY DIODE PAIR	1010.6214.00	HEWLETT_PA	HSMS2825 L31	
V161	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V162	AK BSR13 N 30V 800MA TRANSISTOR	AK 0007.2209.00	VALVO	BSR 13	
V163	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V164	AK BSR18A P 40V 200MA TRANSISTOR	AK 0007.2073.00	PHILIPS_SE	BSR18 (BSR18A)	
V165	AD BAV99 75V DUO UDI HIGH-SPEED DOUBLE DIODE	AD 0911.0092.00	VALVO	BAV99	
V166	AE BZX284-B3V3 0,4W ZDI ZENER DIODE	0048.3474.00	PHILIPS_SE	BZX284-B3V3	
V167	AK BCP68-16 N 20V TRANS MEDIUM POWER TRANSISTOR	0008.2019.00	PHILIPS	BCP68-25	
V168	AE HSMS2825 1+1 SCHOTTKY SCHOTTKY DIODE PAIR	1010.6214.00	HEWLETT_PA	HSMS2825 L31	
V169	AE HSMS2825 1+1 SCHOTTKY SCHOTTKY DIODE PAIR	1010.6214.00	HEWLETT_PA	HSMS2825 L31	
V170	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V171	AE BAR63-03W PIN PIN DIODE	1051.4851.00	SIEMENS	BAR63-03W (-A1025)	
V172	AE HSMS2825 1+1 SCHOTTKY SCHOTTKY DIODE PAIR	1010.6214.00	HEWLETT_PA	HSMS2825 L31	
V177	AM SST108 N-D 25V JFET JUNCTION FET	6007.3949.00	SILICONIX	SST108	
V178	AM SST108 N-D 25V JFET JUNCTION FET	6007.3949.00	SILICONIX	SST108	
V181	BM AFO02C1-39 GAASFETSWI GAAS IC CONTROL FET	1085.2316.00	ALPHA_IND	AFO02C1-39	
V182	BM AFO02C1-39 GAASFETSWI GAAS IC CONTROL FET	1085.2316.00	ALPHA_IND	AFO02C1-39	
V183	BM AFO02C1-39 GAASFETSWI GAAS IC CONTROL FET	1085.2316.00	ALPHA_IND	AFO02C1-39	
V184	AM SST108 N-D 25V JFET JUNCTION FET	6007.3949.00	SILICONIX	SST108	
V189	AM SST108 N-D 25V JFET JUNCTION FET	6007.3949.00	SILICONIX	SST108	
V190	BM AFO02C1-39 GAASFETSWI GAAS IC CONTROL FET	1085.2316.00	ALPHA_IND	AFO02C1-39	
V191	BM AFO02C1-39 GAASFETSWI GAAS IC CONTROL FET	1085.2316.00	ALPHA_IND	AFO02C1-39	
V192	AM SST108 N-D 25V JFET JUNCTION FET	6007.3949.00	SILICONIX	SST108	
V193	AM SST108 N-D 25V JFET JUNCTION FET	6007.3949.00	SILICONIX	SST108	
V194	AE BZV55/C3V3 0,5W ZDI ZENER DIODE	AE 0006.9800.00	PHILIPS_SE	BZV55B3V3	
V195	AE BZV55/C2V7 0,5W ZDI ZENER DIODE	AE 0007.3411.00	PHILIPS_SE	BZV55B2V7	
X1	FJ EINLOETBUCHSE MMCX SMD CONNECTOR	1075.4045.00	SUHNER	82MMCX-S50-0-51/1110	
X5	FP E-PRESS STIFTLAISTE 2P CONNECTOR	0048.4706.00			
X6	FP E-PRESS STIFTLAISTE 2P CONNECTOR	0048.4706.00			
X7	FP E-PRESS STIFTLAISTE 2P CONNECTOR	0048.4706.00			
X8	FP E-PRESS STIFTLAISTE 2P CONNECTOR	0048.4706.00			
X11	FP STECKERLEISTE 32POL. CONNECTOR 32P.	FP 0008.5718.00	DEUT_ELCD	16 8457 064 002 027	
X240	FJ EINLOETBUCHSE MMCX CONNECTOR	1085.1532.00	SUHNER	82MMCXS50-0-2/111KG	
X241	FJ EINLOETBUCHSE SMA CONNECTOR	1085.1726.00	SUHNER	82SMA-S-50-0-45/111N	
X246	FJ EINLOETBUCHSE SMA CONNECTOR	1085.1726.00	SUHNER	82SMA-S-50-0-45/111N	
X247	FJ EINLOETBUCHSE SMA CONNECTOR	1085.1726.00	SUHNER	82SMA-S-50-0-45/111N	
X248	FJ EINLOETBUCHSE SMA CONNECTOR	1085.1726.00	SUHNER	82SMA-S-50-0-45/111N	
X249	FJ EINLOETBUCHSE SMA CONNECTOR	1085.1726.00	SUHNER	82SMA-S-50-0-45/111N	
Z1	LD T-FILTER 3,3NF SMD SMD-FILTER	1039.1362.00	MURATA	NFM61R20T332T1	


1GPK	887 3PLU	Äl	Datum Date	Schaltteilleiste für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	48+	

35.0028-0693

Für diese Unterlage behalten wir uns alle Rechte vor.

Comp. No.	Designation		Stock No.	Manufacturer	Designation	contained in
Z4	LD T-FILTER 33PF	SMD	1062.6744.00	MURATA	NFM61ROOT330	
	SMD-T-FILTER 33PF					
Z5	LD T-FILTER 33PF	SMD	1062.6744.00	MURATA	NFM61ROOT330	
	SMD-T-FILTER 33PF					
Z6	LD T-FILTER 100PF	SMD	1039.1356.00	MURATA	NFM61ROOT101T1	
..18	SMD-FILTER					
Z19	LD PI-FILTER 2X1NF	SMD	4024.7152.00	TUSONIX	4700-003	
..23	SMD-CERAMIC-PI-FILTER					
Z24	LD T-FILTER 33PF	SMD	1062.6744.00	MURATA	NFM61ROOT330	
	SMD-T-FILTER 33PF					

95.0028-0693

1GPK	887 3PLU	ÄI	Datum Date	Schauteille für Parts list for	Sachnummer Stock No.	Blatt-Nr. Page
	ROHDE & SCHWARZ	68	07.10.99	EE IQ-MODULATOR IQ-MODULATOR	1084.9800.01 SA	49-



ROHDE & SCHWARZ

XY-Liste

XY List

Erklärung der Spaltenbezeichnungen:

el. Kennz.	Bauelement-Kennzeichen
Seite	Leiterplatten-Seite, auf der sich das Bauelement befindet
X/Y	Koordinaten (in Millimeter) des Bauelementes auf der Leiterplatte bezogen auf den Nullpunkt
Planq., Bl.	Planquadrat und Seite des Schaltbildes für das jeweilige Bauelement


Explanation of column designations:

Part	Identification of instrument part
Side	Side of the PC board on which instrument part is positioned
X/Y	Coordinates (in units of millimeters) of the component on the PC board in reference to zero point
Sqr, Pg	Square and page of the diagram for the respective instrument part

Service-Relevante Bauteile / Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
P1	B	206	46	11D	3	P20	B	154	132	6C	10	P40	B	35	18	6C	9
P2	B	206	44	11D	3	P21	B	84	32	10B	9	P41	B	60	43	4C	10
P3	B	206	41	11E	3	P22	B	77	17	10D	9	P42	B	158	105	6D	10
P5	B	96	37	5D	3	P23	B	173	97	7C	5	P43	B	44	126	5A	10
P6	B	125	90	5D	3	P24	B	182	89	6D	5	P44	B	51	49	4F	16
P7	B	150	37	5D	3	P25	B	91	95	11C	22	P45	B	54	48	5E	16
P8	B	99	37	5D	3	P26	B	91	92	10A	22	R51	B	147	41	7C	21
P9	B	131	68	11A	3	P29	B	203	97	4B	5	R124	B	168	72	6B	6
P10	B	138	37	8C	21	P32	B	85	63	4B	10	R125	B	286	63	7C	19
P11	B	164	35	6B	21	P33	B	221	72	7D	12	R516	B	182	91	2C	5
P12	B	177	44	3B	21	P35	B	75	63	5A	9	R683	B	30	140	8B	14
P13	B	156	83	11C	21	P36	B	85	44	5C	9	R929	B	134	143	5C	10
P14	B	190	40	4A	6	P37	B	60	40	6A	9	R930	B	51	84	6A	16
P18	B	29	68	5C	15	P38	B	42	16	6B	9	R968	B	220	129	5C	20
P19	B	27	60	6C	15	P39	B	35	21	6C	9						


Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR		Sprache: Lang.: de	Blatt: Sh.: 1 +	Aei: C.I.: 08.11
	Typ: SMIQ	Datum: 99-05-17	Abteilung: 1GPK Dpt:	Name: HO	Sachnr.: 1084.9800.01 XY Part No.:

Nicht-Service-Bauteile / Non-Service Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
B1	B	150	125	9B	12	C74	B	134	43	1F	3	C148	A	25	77	6F	15
C1	A	102	130	6A	5	C75	B	135	69	7E	4	C149	B	224	82	9E	20
C2	A	89	132	6B	5	C76	A	125	53	8E	4	C150	A	275	135	8C	18
C3	B	76	93	3C	8	C77	A	127	74	5E	4	C151	A	230	22	2B	17
C4	B	77	75	2C	8	C78	A	138	61	8C	21	C152	A	297	115	3C	19
C5	A	181	57	3B	21	C79	A	140	71	9B	21	C153	A	294	98	3F	19
C6	B	71	128	9B	13	C80	A	173	65	5E	21	C154	A	280	102	3E	19
C7	B	63	130	10B	13	C81	A	173	61	6E	21	C155	A	282	79	4E	19
C8	B	71	105	9E	13	C82	A	179	72	5F	21	C156	A	294	78	4F	19
C9	B	63	107	10D	13	C83	A	141	53	8E	21	C157	A	223	57	5E	3
C10	B	19	38	9C	15	C84	A	152	45	9E	21	C158	A	201	77	6F	3
C11	B	19	31	10B	15	C85	A	125	92	11E	21	C159	B	200	79	3E	6
C12	A	12	71	8A	11	C86	B	263	107	3D	18	C160	B	61	57	5B	7
C13	A	12	97	9A	11	C87	B	175	51	7E	6	C161	B	279	92	3B	19
C14	A	20	45	7B	11	C88	B	163	37	7F	6	C162	A	275	77	6E	19
C15	B	43	75	5B	16	C89	B	182	74	4C	6	C163	B	299	67	7D	19
C16	A	249	71	5E	22	C90	B	19	34	10C	15	C164	B	276	70	5B	19
C17	B	161	135	7B	12	C91	A	26	28	10D	15	C165	B	283	49	7A	19
C18	B	152	137	8A	12	C92	B	46	25	11D	7	C166	A	243	83	7A	17
C19	B	289	137	9E	18	C93	A	82	130	8E	10	C167	A	240	59	5B	17
C20	B	289	135	9D	18	C94	A	96	74	9E	10	C168	B	288	132	10E	18
C21	A	205	48	10D	3	C95	A	114	75	9E	10	C169	B	54	39	3E	7
C22	B	189	52	4A	6	C96	A	151	134	10E	10	C170	B	77	57	4E	7
C23	B	110	133	5B	13	C97	A	140	133	10E	10	C171	B	65	63	5E	7
C24	B	110	127	6A	13	C98	A	23	91	5E	11	C172	B	82	41	5F	7
C25	B	77	110	9D	13	C99	A	126	138	3E	10	C173	B	71	52	6F	7
C26	B	77	133	9B	13	C100	A	75	30	1E	11	C174	B	67	47	4E	7
C27	B	77	141	9A	13	C101	A	59	32	1E	11	C175	A	140	50	8C	21
C28	B	110	104	6D	13	C102	B	11	87	4D	11	C176	B	170	80	7B	6
C29	B	111	110	5D	13	C103	B	15	64	4F	11	C177	B	79	44	5C	7
C30	B	77	119	9D	13	C104	A	20	48	6E	11	C178	A	121	127	3E	5
C31	A	35	103	3E	15	C105	A	22	29	2E	11	C180	B	12	107	11B	14
C32	B	17	48	7B	15	C106	A	11	49	5E	11	C181	B	74	67	4C	7
C33	B	29	76	5C	15	C107	B	293	23	10B	19	C182	B	61	59	6B	7
C34	B	11	50	7B	15	C108	A	148	83	7B	21	C183	B	73	47	6C	7
C35	B	88	139	4B	8	C109	A	127	68	3E	9	C184	A	79	37	4D	7
C36	B	88	116	11C	8	C110	A	16	88	6E	15	C185	A	16	82	8A	11
C37	B	11	92	10A	11	C111	A	38	55	3A	16	C186	A	25	98	9A	11
C38	A	267	104	2B	18	C112	A	47	82	6E	16	C187	B	13	96	10B	11
C39	B	44	85	7B	16	C113	A	47	49	6E	16	C188	A	264	55	11D	22
C40	B	49	53	2B	16	C114	A	50	67	7E	16	C189	A	75	40	5C	9
C41	B	37	66	3A	16	C115	A	41	92	6E	16	C190	A	81	57	5B	9
C42	B	170	115	5B	12	C116	A	43	58	7E	16	C191	A	44	74	9A	16
C43	B	168	124	6B	12	C117	A	38	72	8E	16	C192	A	266	60	3A	22
C44	B	182	104	5A	12	C118	A	148	97	7B	21	C193	A	240	94	4C	22
C45	B	155	109	6A	12	C119	A	141	83	8F	21	C194	A	283	69	5F	19
C46	B	154	125	7A	12	C120	B	190	90	1E	5	C195	A	257	64	11E	22
C47	A	38	78	9D	16	C121	B	177	96	1E	5	C196	A	265	93	10D	22
C48	B	242	93	10B	17	C122	A	169	18	2F	3	C197	A	260	83	10E	22
C49	A	227	106	11E	12	C123	A	106	84	3A	9	C198	A	259	93	9D	22
C50	B	189	117	4B	12	C124	A	105	54	3C	9	C199	B	276	89	3B	19
C51	A	205	132	5A	20	C125	A	179	95	2E	5	C200	B	197	131	3C	20
C52	A	245	107	10B	17	C126	A	243	78	8D	22	C201	A	93	91	10B	22
C53	A	62	118	9E	10	C127	A	259	75	8D	22	C202	B	292	89	5C	19
C54	A	220	111	6D	20	C128	A	191	90	2E	5	C203	B	232	127	9B	20
C55	A	259	135	10A	20	C129	A	226	118	5D	20	C204	B	238	137	10B	20
C56	A	13	82	4E	11	C130	A	190	111	5A	12	C205	A	277	82	4D	19
C57	B	240	130	9B	20	C131	A	169	130	7A	12	C206	A	290	96	2D	19
C58	A	236	126	9C	20	C132	A	221	139	6A	20	C207	B	290	94	2C	19
C59	A	15	91	5E	11	C133	A	218	142	6A	20	C208	B	278	133	8E	18
C60	B	278	100	2A	19	C134	A	227	99	10E	12	C209	B	245	37	4E	17
C61	B	279	86	4C	19	C135	A	233	142	7A	20	C210	A	114	94	10B	22
C62	A	16	40	5E	11	C136	B	232	105	7D	20	C211	B	227	102	7E	20
C63	B	279	106	1B	19	C137	B	223	90	8D	20	C212	A	290	35	11E	19
C64	A	138	40	10B	3	C138	A	224	131	8A	20	C213	A	143	73	10C	21
C65	B	244	51	4D	17	C139	A	22	57	5E	11	C214	B	261	30	3C	17
C66	A	20	57	5E	11	C140	B	207	98	4C	5	C215	B	163	50	8B	6
C67	A	155	72	8E	21	C141	A	203	141	4A	20	C216	B	28	41	8C	15
C68	B	277	80	4A	19	C142	B	263	131	6D	18	C217	B	21	38	8C	15
C69	B	277	60	6A	19	C143	A	279	131	8C	18	C218	A	73	94	9C	8
C70	B	279	67	6C	19	C144	B	230	97	7E	20	C219	A	72	75	8C	8
C71	A	23	68	4E	11	C145	B	288	130	10D	18	C220	A	102	67	2C	10
C72	B	292	50	9B	19	C146	B	301	140	9C	18	C221	A	61	58	3B	10
C73	A	275	39	11D	19	C147	B	293	104	5C	18	C222	A	110	68	2D	10


Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

 ROHDE & SCHWARZ	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR		Sprache: Lang.: de		Blatt: Sh.: 2 +		Aei: C.I.: 08.11	
	Typ: SMIQ Type:	Datum: 99-05-17 Date:	Abteilung: 1GPK Dpt:	Name: HO Name:	Sachnr.: 1084.9800.01 XY Part No.:			

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz.	Seite	X	Y	Planq.	Bl.	el. Kennz.	Seite	X	Y	Planq.	Bl.	el. Kennz.	Seite	X	Y	Planq.	Bl.
Part	Side			Sqr	Pg	Part	Side			Sqr	Pg	Part	Side			Sqr	Pg
C223	A	61	46	3C	10	C297	A	23	131	1E	14	C371	A	281	65	5E	19
C224	A	105	135	2E	10	C298	A	82	119	6D	13	C372	B	99	110	6E	13
C225	A	123	115	3A	10	C299	A	14	126	1E	14	C373	B	172	45	9C	6
C226	A	117	108	2A	10	C300	A	14	33	8C	11	C374	B	277	94	3B	19
C227	B	200	133	4B	20	C301	A	25	39	8D	11	C375	B	68	128	10B	13
C228	B	207	132	5B	20	C302	A	37	90	7D	16	C376	B	68	105	10D	13
C229	A	218	81	8D	12	C303	A	35	53	5E	16	C377	B	19	35	9B	15
C230	A	231	85	9D	12	C304	A	217	94	9D	12	C378	B	157	135	7B	12
C231	B	233	130	9C	20	C305	B	221	120	6F	20	C379	B	210	136	5B	20
C232	A	291	58	5E	19	C306	B	222	139	6C	20	C380	A	140	77	10A	21
C233	A	290	70	5E	19	C307	A	129	68	3C	9	C381	A	143	95	10A	21
C234	B	283	118	12E	18	C308	B	115	138	4B	13	C382	A	241	19	2C	17
C235	A	154	51	6F	21	C309	B	137	133	2B	13	C383	A	253	49	6C	17
C236	B	250	51	5C	17	C310	B	115	115	4E	13	C384	B	278	74	5B	19
C237	B	228	55	6F	12	C311	B	119	111	4E	13	C385	B	278	54	7A	19
C238	B	222	111	6E	20	C312	B	140	110	2E	13	C386	B	179	79	5B	6
C239	B	225	112	5E	20	C313	B	119	134	4B	13	C387	A	47	58	3F	16
C240	B	194	47	3A	6	C314	B	21	48	8B	15	C388	B	254	63	7C	17
C241	A	28	87	5D	15	C315	B	20	63	6B	15	C389	A	170	55	5B	21
C242	B	11	115	11B	14	C316	A	52	117	4E	14	C390	B	42	40	7E	15
C243	A	205	98	5C	5	C317	A	81	82	9A	8	C391	B	191	49	5F	6
C244	B	274	135	8D	18	C318	B	86	84	3A	8	C392	A	114	79	1E	9
C245	B	247	59	6C	17	C319	B	36	48	1B	16	C393	A	51	71	10B	16
C246	A	162	90	6D	5	C320	A	190	143	3C	20	C394	B	262	81	9D	17
C247	B	229	134	8B	20	C321	B	44	62	3B	16	C395	A	105	97	11E	22
C248	B	231	139	7B	20	C322	B	175	110	5B	12	C396	A	243	70	6A	17
C249	A	248	37	4E	17	C323	B	209	110	3B	12	C397	B	223	101	7E	20
C250	A	243	40	5E	17	C324	B	163	115	6B	12	C398	B	185	97	3B	5
C251	A	239	46	6E	17	C325	B	222	41	3D	12	C399	A	219	75	3E	12
C252	B	216	144	6B	20	C326	A	192	131	4D	20	C400	A	219	26	3A	17
C253	B	221	141	6B	20	C327	B	195	113	4B	12	C401	A	223	96	4F	12
C254	A	229	39	5E	12	C328	B	228	92	8E	20	C402	A	228	78	3F	12
C255	B	213	141	6B	20	C329	A	54	88	8A	16	C403	A	191	43	10E	3
C256	A	262	110	2A	18	C330	B	205	132	5B	20	C404	A	170	38	6B	21
C257	A	264	113	7B	18	C331	B	230	79	9E	20	C405	B	66	128	10B	13
C258	B	200	128	5C	20	C332	B	108	24	10C	5	C406	B	66	105	10E	13
C259	B	267	117	2F	18	C333	B	258	120	3E	18	C407	B	155	135	8B	12
C260	B	267	115	1F	18	C334	A	108	88	10D	22	C408	A	278	91	6D	19
C261	B	277	116	4D	18	C335	B	261	37	3C	17	C409	A	300	71	4D	19
C262	B	277	114	4D	18	C336	B	240	66	7C	17	C410	A	150	40	8D	21
C263	A	261	65	2B	22	C337	B	258	32	3D	17	C411	A	300	98	1D	19
C264	B	30	114	1C	15	C338	B	252	69	7C	17	C412	A	124	67	3A	9
C265	B	30	108	1C	15	C339	B	241	72	8C	17	C413	A	47	64	3E	16
C266	B	79	27	2A	11	C340	B	252	75	8C	17	C414	A	48	97	3D	16
C267	B	55	20	3B	11	C341	B	240	78	8C	17	C415	B	205	104	3A	12
C268	A	84	18	4C	11	C342	B	248	82	9C	17	C416	B	215	135	5C	20
C269	A	204	129	2D	20	C343	B	249	108	11C	17	C417	A	200	68	10E	3
C270	B	109	142	5B	13	C344	B	230	76	9E	20	C418	A	196	58	10D	3
C271	A	21	126	11E	14	C345	B	250	34	3D	17	C419	A	254	105	1B	18
C272	B	127	129	3C	13	C346	B	251	37	4C	17	C420	B	185	132	2B	20
C273	B	128	140	3B	13	C347	B	248	50	5C	17	C421	B	194	133	3C	20
C274	B	119	139	3C	13	C348	B	248	60	6C	17	C422	B	220	70	7E	12
C275	B	109	119	5E	13	C349	B	252	60	7C	17	C423	B	224	70	7D	12
C276	B	119	127	3B	13	C350	A	107	62	2E	9	C424	A	285	52	10E	19
C277	B	127	106	3E	13	C351	A	197	66	9E	3	C425	A	138	81	11B	21
C278	B	119	116	3E	13	C352	A	221	68	8A	3	C426	B	172	73	7B	6
C279	B	119	104	3D	13	C353	A	222	51	8C	3	C427	B	100	127	6B	13
C280	B	128	117	3D	13	C354	A	189	62	10D	3	C428	B	90	126	7B	13
C281	A	38	120	6E	14	C355	A	256	111	3A	18	C429	B	100	104	6E	13
C282	B	22	129	7B	14	C356	A	113	38	4E	3	C430	B	14	29	10B	15
C283	B	40	51	2B	16	C357	A	190	75	8E	3	C431	A	114	117	4A	10
C284	B	171	106	6B	12	C358	A	173	53	3E	21	C432	B	44	82	6B	16
C285	B	159	116	7B	12	C359	A	176	47	3F	21	C433	B	147	135	9A	12
C286	B	192	107	4B	12	C360	A	55	22	5E	9	C434	B	227	42	5D	12
C287	B	222	51	6D	12	C361	A	43	29	4E	9	C435	A	226	75	8D	12
C288	B	229	61	6D	12	C362	B	195	95	4C	5	C436	A	224	86	8E	12
C289	B	177	129	2C	20	C363	B	168	93	1B	5	C437	A	219	92	9C	12
C290	B	194	144	3B	20	C364	A	255	130	11C	20	C438	B	208	114	3B	12
C291	B	287	137	9D	18	C365	B	63	128	10B	13	C439	B	195	109	3B	12
C292	A	101	52	5F	4	C366	B	63	105	10D	13	C440	B	224	75	10E	20
C293	A	107	51	7F	4	C367	B	20	31	10B	15	C441	B	236	142	11B	20
C294	B	201	49	2C	6	C368	B	17	28	10B	15	C442	A	289	142	9C	18
C295	A	84	142	6A	13	C369	B	152	135	8B	12	C443	A	235	138	10C	20
C296	B	21	123	7B	14	C370	B	262	86	9D	17	C444	B	284	128	11D	18

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

			Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR				Sprache: Lang.: de		Blatt: Sh.: 3 +		Aei: C.I.: 08.11	
Typ: SMIQ Type: SMIQ		Datum: 99-05-17 Date: 99-05-17		Abteilung: 1GPK Dpt: 1GPK		Name: HO Name: HO		Sachnr.: 1084.9800.01 XY Part No.: 1084.9800.01 XY				

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
C445	B	281	103	2B	19	C519	A	257	75	6F	22	C593	B	248	94	10C	17
C446	B	15	84	6A	15	C520	B	183	44	6E	6	C594	B	177	110	5B	12
C447	A	242	88	6D	22	C521	B	196	81	6F	6	C595	B	231	58	6F	12
C448	B	61	128	10B	13	C522	B	163	82	7E	6	C596	B	234	139	10C	20
C449	B	61	105	10E	13	C523	A	154	55	6E	21	C597	B	63	76	2B	8
C450	B	19	29	10C	15	C524	A	154	53	7E	21	C598	B	290	134	9E	18
C451	B	150	137	8B	12	C525	A	162	51	9E	21	C599	A	255	28	8B	19
C452	B	181	141	1B	20	C526	A	171	43	10E	21	C600	A	266	31	10C	19
C453	B	284	54	8B	19	C527	A	128	108	11E	10	C601	A	281	112	8E	19
C454	B	284	137	9E	18	C528	A	117	112	11E	10	C602	A	286	111	7E	19
C455	A	133	75	11B	21	C529	A	292	45	10D	19	C603	A	275	113	8F	19
C456	B	189	41	3A	6	C530	A	147	93	8B	21	C604	B	286	66	7C	19
C457	B	44	143	8E	14	C531	A	110	91	2B	9	C605	A	188	76	6F	3
C458	B	100	135	6B	13	C532	A	110	61	2D	9	C606	A	178	79	4B	21
C459	B	134	130	2C	13	C533	B	259	117	2E	18	C607	A	164	79	4C	21
C460	B	74	128	9B	13	C534	B	259	115	1E	18	C608	A	180	134	3C	20
C461	B	74	105	9E	13	C535	A	278	48	1E	19	C609	B	231	129	8B	20
C462	B	90	103	7E	13	C536	A	287	41	2F	19	C610	B	24	134	9C	14
C463	B	100	112	6E	13	C537	A	288	30	2F	19	C611	B	26	88	3C	15
C464	B	138	107	2E	13	C538	A	275	33	1E	19	C612	B	23	112	2C	15
C465	A	42	120	4E	14	C539	A	281	26	3F	19	C613	B	28	112	2C	15
C466	A	28	137	2E	14	C540	A	295	22	2E	19	C614	B	15	138	9C	14
C467	B	19	41	8B	15	C541	A	125	38	2E	3	C615	B	47	30	11B	7
C468	B	29	62	6C	15	C542	A	273	19	9E	19	C616	B	25	81	4C	15
C469	A	36	141	2E	14	C543	B	247	106	11C	17	C617	B	55	31	2B	7
C470	A	135	116	5E	10	C544	B	297	49	10B	19	C618	B	56	26	2B	7
C471	A	135	131	5D	10	C545	A	287	26	10C	19	C619	B	65	24	2D	7
C472	A	156	122	6D	10	C546	A	277	32	11C	19	C620	B	68	33	2D	7
C473	A	156	127	5C	10	C547	B	286	30	8C	19	C621	A	277	50	10D	19
C474	A	59	26	2B	11	C548	B	242	106	11C	17	C622	B	46	112	4C	14
C475	A	66	36	3C	11	C549	B	286	29	9C	19	C623	B	266	131	7E	18
C476	A	77	34	9A	9	C550	B	70	64	5B	7	C624	B	43	110	4C	14
C477	A	71	20	9D	9	C551	A	246	114	9B	17	C625	A	178	128	3C	20
C478	A	179	93	5D	5	C552	B	300	133	10E	18	C626	B	36	124	5C	14
C479	B	190	94	3C	5	C553	B	87	139	4C	8	C627	B	38	108	5C	14
C480	B	195	21	10D	5	C554	B	87	116	11C	8	C628	B	12	127	10C	14
C481	A	250	81	5E	22	C555	B	281	113	4D	18	C629	B	22	131	10C	14
C482	B	290	57	8B	19	C556	B	84	48	5C	7	C630	B	19	103	3C	15
C483	A	191	95	6C	5	C557	B	281	115	4D	18	C631	B	27	134	8B	14
C484	B	162	133	7B	12	C558	B	257	112	2C	18	C632	B	21	81	5B	15
C485	B	192	130	3C	20	C559	B	282	110	4C	18	C633	B	17	118	1C	15
C486	B	297	54	9B	19	C560	B	19	112	2C	15	C634	B	28	131	7B	14
C487	B	226	134	8C	20	C561	B	19	104	2B	15	C635	B	73	43	5C	7
C488	B	284	25	9C	19	C562	B	19	109	2B	15	C636	B	63	47	5B	7
C489	B	203	138	5B	20	C563	A	44	140	3E	14	C637	B	288	25	9C	19
C490	B	217	114	6E	20	C564	A	53	129	3E	14	C638	A	12	120	9E	14
C491	B	246	41	4C	17	C565	B	19	107	2C	15	C639	A	34	117	5E	14
C492	B	224	144	7B	20	C566	B	20	60	6B	15	C640	A	23	134	2E	14
C493	A	232	133	8B	20	C567	B	17	104	2B	15	C641	A	40	141	3E	14
C494	A	227	86	4E	12	C568	B	60	89	3B	8	C642	A	53	131	3E	14
C495	A	84	30	10B	9	C569	B	281	49	7B	19	C643	A	16	127	9E	14
C496	A	75	21	10D	9	C570	B	15	97	3B	15	C644	A	29	123	5D	14
C497	B	221	126	5D	20	C571	B	265	104	3D	18	C645	A	78	64	5D	7
C498	B	99	133	6B	13	C572	B	30	136	8B	14	C646	A	70	67	5A	7
C499	B	149	130	9B	12	C573	B	23	74	5B	15	C647	B	25	143	9B	14
C500	B	224	44	5D	12	C574	B	183	76	4E	6	C648	B	35	120	5B	14
C501	B	183	131	2B	20	C575	A	22	116	10E	14	C649	B	49	118	4B	14
C502	B	240	142	10B	20	C576	A	39	113	5E	14	C650	A	27	129	10C	14
C503	B	229	75	10E	20	C577	B	26	83	3C	15	C651	A	40	126	5C	14
C504	B	288	129	10D	18	C578	B	166	66	9E	4	C652	B	15	128	10B	14
C505	B	276	65	6B	19	C579	B	43	69	4B	16	C653	B	29	82	4C	15
C506	B	276	85	4B	19	C580	A	253	53	3B	22	C654	A	229	52	5F	12
C507	A	154	6	11D	21	C581	A	54	77	8C	16	C655	A	23	17	9C	11
C508	B	157	18	10C	5	C582	B	197	73	3C	6	C656	A	16	37	8C	11
C509	B	235	136	10B	20	C583	B	287	97	2D	19	C657	A	60	90	9B	8
C510	B	218	131	5C	20	C584	B	296	94	5D	19	C658	A	62	70	8B	8
C511	A	69	44	11E	10	C585	B	297	59	7D	19	C659	A	110	133	3E	5
C512	A	79	51	11E	10	C586	A	295	105	6E	19	C660	A	83	106	3E	8
C513	A	138	85	9A	21	C587	A	263	23	11B	19	C661	A	103	110	4F	8
C514	B	172	23	10D	5	C588	A	257	33	12C	19	C662	A	89	112	4E	8
C515	B	99	24	10E	5	C589	B	35	29	7C	15	C663	B	66	98	4B	8
C516	A	256	85	3C	22	C590	B	247	103	11C	17	C664	B	64	69	1B	8
C517	A	255	57	2A	22	C591	B	294	107	5C	18	C665	B	72	96	4D	8
C518	A	262	80	7E	22	C592	B	226	117	5F	20	C666	B	79	71	1D	8


Fu: diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved

	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR			Sprache: Lang.: de	Blatt: Sh.: 4 +	Aei: C.I.: 08.11
	Typ: SMIQ	Datum: 99-05-17 Date:	Abteilung: 1GPK Dpt:	Name: HO Name:	Sachnr.: 1084.9800.01 XY Part No.:	

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

Für diese Unterteilung behalten wir uns alle Rechte vor.
For this document all rights reserved.

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
C667	B	69	92	4E	8	D8	A	258	86	3C	22	D32	A	133	95	5E	21
C668	B	67	69	1E	8	D8	A	258	86	9D	22	D33	B	225	63	6D	12
C669	B	68	79	2B	8	D9	A	179	60	4A	21	D33	B	225	63	6F	12
C670	B	74	82	2C	8	D9	A	179	60	4B	21	D34	A	131	43	10A	3
C671	B	73	91	3C	8	D9	A	179	60	4B	21	D34	A	131	43	3E	3
C672	A	65	78	8B	8	D9	A	179	60	4B	21	D34	A	131	43	6A	3
C673	A	66	65	8C	8	D9	A	179	60	5E	21	D34	A	131	43	6C	3
C674	A	80	96	10B	8	D10	A	168	69	4C	21	D34	A	131	43	6D	3
C675	A	80	66	8B	8	D10	A	168	69	4C	21	D35	A	123	56	11E	4
C676	A	62	96	10C	8	D10	A	168	69	4D	21	D35	A	123	56	11E	4
C677	A	78	70	8D	8	D10	A	168	69	4D	21	D35	A	123	56	3B	4
C678	A	78	96	10D	8	D10	A	168	69	6E	21	D35	A	123	56	3D	4
C679	A	70	74	8E	8	D11	A	151	70	7E	21	D35	A	123	56	9E	4
C680	A	66	94	10E	8	D11	A	151	70	9B	21	D36	B	199	72	2D	6
C681	A	72	81	8C	8	D11	A	151	70	9C	21	D36	B	199	72	2D	6
C682	A	74	92	9C	8	D11	A	151	70	9C	21	D36	B	199	72	3D	6
C683	B	80	71	1A	8	D11	A	151	70	9C	21	D36	B	199	72	3D	6
C684	B	80	96	4A	8	D12	A	14	129	10D	14	D36	B	199	72	3E	6
C685	B	95	144	4C	8	D12	A	14	129	1E	14	D37	B	62	31	3A	7
C686	B	97	141	4C	8	D12	A	14	129	9D	14	D38	B	155	89	11A	4
C687	B	95	121	10C	8	D12	A	14	129	9D	14	D38	B	155	89	8E	4
C688	B	97	118	10C	8	D12	A	14	129	9D	14	D39	A	204	62	10D	3
C689	B	67	88	3B	8	D13	A	35	129	2E	14	D39	A	204	62	10E	3
C690	B	95	137	4C	8	D13	A	35	129	4D	14	D39	A	204	62	7E	3
C691	B	95	114	10C	8	D13	A	35	129	4D	14	D40	B	62	37	3C	7
C692	A	66	82	9B	8	D13	A	35	129	4D	14	D40	B	62	37	3E	7
C693	B	67	85	2B	8	D13	A	35	129	5D	14	D41	B	162	54	10E	4
C694	A	63	80	9B	8	D14	A	44	129	10B	10	D41	B	162	54	7A	4
C695	A	81	94	9A	8	D14	A	44	129	10B	10	D41	B	162	54	7B	6
C696	A	85	70	8A	8	D14	A	44	129	11C	14	D42	B	139	54	7C	21
C697	B	86	75	2A	8	D14	A	44	129	3E	14	D42	B	139	54	4A	4
C698	B	86	94	3A	8	D14	A	44	129	7C	14	D42	B	139	54	7E	4
C699	B	83	131	8B	13	D15	A	246	86	10D	22	D43	B	139	66	10C	21
C700	B	83	108	8E	13	D15	A	246	86	5C	22	D43	B	139	66	5A	4
C701	B	231	113	7D	20	D15	A	246	86	5C	22	D43	B	139	66	8E	4
C702	B	22	58	7C	15	D15	A	246	86	5D	22	D44	B	228	99	7E	20
C703	B	76	84	2C	8	D15	A	246	86	5D	22	D45	B	98	50	1C	10
C704	A	76	85	9C	8	D16	A	52	38	4E	9	D45	B	98	50	3C	4
C705	A	109	126	5A	5	D16	A	52	38	8B	9	D45	B	98	50	8E	4
C706	A	83	85	9A	8	D17	A	52	25	5E	9	D46	B	114	87	1A	10
C707	B	85	86	2A	8	D17	A	52	25	8D	9	D46	B	114	87	7E	4
C708	A	150	106	3F	4	D18	B	139	44	2A	4	D46	B	114	87	8C	4
C709	B	28	121	6C	14	D18	B	139	44	6E	4	D47	B	98	87	1E	10
C710	A	220	40	7C	5	D19	A	68	115	10C	10	D47	B	98	87	7C	4
C711	B	13	124	11C	14	D19	A	68	115	8B	10	D47	B	98	87	7E	4
C712	A	91	110	6B	8	D19	A	68	115	8C	10	D48	B	98	65	1D	10
C713	A	105	118	6D	8	D19	A	68	115	8E	10	D48	B	98	65	4C	4
C714	A	105	106	6E	8	D19	A	68	115	9E	10	D48	B	98	65	8E	4
C715	A	88	119	6C	8	D20	B	147	89	6E	4	D49	A	202	50	10D	3
C800	A	184	138	3C	20	D20	B	147	89	9A	4	D49	A	202	50	10E	3
C850				9E	12	D21	B	128	91	6E	4	D49	A	202	50	11D	3
D1	B	65	55	5B	7	D21	B	128	91	8A	4	D49	A	202	50	7E	3
D1	B	65	55	6E	7	D22	B	98	39	2C	4	D49	A	202	50	1F	4
D2	B	77	47	5C	7	D22	B	98	39	6E	4	D50	B	19	84	4B	15
D2	B	77	47	5E	7	D23	B	114	69	11C	4	D51	B	21	118	1C	15
D3	B	186	72	3B	6	D23	B	114	69	6E	4	D52	B	113	54	1E	3
D3	B	186	72	4E	6	D24	B	98	78	5C	4	D52	B	113	54	4B	3
D4	A	156	17	1B	3	D24	B	98	78	5E	4	D53	A	141	37	5D	21
D4	A	156	17	1C	3	D25	B	139	79	6A	4	D53	A	141	37	7E	21
D4	A	156	17	1D	3	D25	B	139	79	7E	4	D54	B	70	31	3C	7
D4	A	156	17	2C	3	D26	B	114	78	6E	4	D55	A	144	108	3F	4
D4	A	156	17	2E	3	D26	B	114	78	9C	4	D55	A	144	108	4E	4
D5	A	19	50	6E	11	D27	B	25	72	5B	15	D56	A	174	105	1D	4
D5	A	19	50	7D	11	D28	B	21	44	8B	15	D56	A	174	105	1E	4
D6	A	130	84	11E	21	D29	A	122	41	4E	3	D56	A	174	105	4E	4
D6	A	130	84	3C	21	D29	A	122	41	7A	3	D56	A	174	105	4E	4
D6	A	130	84	3D	21	D30	A	111	41	4E	3	D56	A	174	105	5E	4
D6	A	130	84	4E	21	D30	A	111	41	7C	3	D57	B	35	39	7C	15
D6	A	130	84	4E	21	D31	A	100	39	3E	3	D57	B	35	39	7E	15
D7	A	71	130	8A	10	D31	A	100	39	7D	3	D57	B	35	39	8C	15
D7	A	71	130	8E	10	D32	A	133	95	11E	21	D57	B	35	39	9A	7
D7	A	71	130	8F	10	D32	A	133	95	2C	21	D57	B	35	39	9C	7
D7	A	71	130	9A	10	D32	A	133	95	2D	21	D58	A	163	109	2E	4
D7	A	71	130	9C	10	D32	A	133	95	2D	21	D58	A	163	109	5E	4

	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR				Sprache: Lang.: de		Blatt: Sh.: 5 +		Aei: C.I.: 08.11	
	Typ: SMIQ	Datum: 99-05-17	Abteilung: 1GPK	Name: HO	Sachnr.: 1084.9800.01 XY Part No.:					

Nicht-Servicable Bauteile / Non-Servicable Components

el. Kennz.	Seite	X	Y	Planq.	Bl.	el. Kennz.	Seite	X	Y	Planq.	Bl.	el. Kennz.	Seite	X	Y	Planq.	Bl.
Part	Side			Sqr	Pg	Part	Side			Sqr	Pg	Part	Side			Sqr	Pg
D59	A	74	106	3E	8	L70	B	275	116	4D	18	L144	A	240	109	10A	17
D59	A	74	106	5D	8	L71	B	223	117	5E	20	L145	B	283	59	7B	19
D61	B	96	61	10D	4	L72	B	235	137	10B	20	L146	A	300	114	3C	19
D61	B	96	61	10E	4	L73	B	275	114	4D	18	L147	A	299	80	5E	19
G1	B	206	56	2C	6	L74	B	77	131	9B	13	L148	B	240	61	7D	17
L1	B	190	138	3B	20	L75	B	18	50	7B	15	L149	B	254	66	7D	17
L2	B	184	80	5B	6	L76	B	263	105	3D	18	L150	B	238	74	8D	17
L3	B	276	141	9D	18	L77	A	277	106	7F	19	L151	B	255	72	8D	17
L4	B	279	95	3B	19	L78	B	285	92	3B	19	L152	B	242	83	8D	17
L5	B	248	48	5C	17	L79	B	135	17	10B	5	L153	B	253	81	9D	17
L6	B	192	52	2C	6	L80	B	143	20	10C	5	L154	B	260	39	4D	17
L7	B	71	120	9C	13	L81	B	40	72	5B	16	L155	B	256	56	7D	17
L8	B	230	126	8C	20	L82	B	12	138	9C	14	L156	A	183	36	2B	21
L9	A	78	142	6A	13	L83	B	298	139	9C	18	L157	A	177	39	2D	21
L10	A	85	120	6C	13	L84	B	279	54	7B	19	L158	A	191	37	2E	21
L11	B	71	142	9A	13	L85	B	279	74	4B	19	L159	B	170	38	2C	21
L12	B	264	117	2E	18	L86	B	104	127	5A	13	L160	A	187	37	2A	21
L13	B	12	56	7A	15	L87	B	12	117	11B	14	L161	A	118	39	11C	10
L14	B	77	108	9D	13	L88	B	47	110	4C	14	L162	A	289	116	8E	19
L15	A	84	35	4A	11	L89	B	105	104	6D	13	L163	A	65	62	4B	10
L16	A	66	21	3A	11	L90	B	21	77	5C	15	L164	B	287	74	4B	19
L17	B	232	103	7D	20	L91	B	22	64	6C	15	L165	A	16	77	6F	15
L18	A	51	78	6D	16	L92	B	25	129	7B	14	L166	A	112	115	12E	10
L19	A	51	46	7D	16	L93	B	37	61	3A	16	L167	B	73	36	4D	10
L20	A	54	64	7D	16	L94	B	180	104	4A	12	L168	B	254	26	3D	17
L21	A	39	96	6E	16	L95	B	155	112	6A	12	L169	A	72	40	11D	10
L22	A	38	65	7E	16	L96	B	157	125	7A	12	L170	B	181	20	10D	5
L23	A	38	68	7E	16	L97	B	24	107	2B	15	L171	B	176	17	10D	5
L24	A	190	128	4A	20	L98	B	14	104	2B	15	L172	B	123	21	10E	5
L25	A	227	110	6D	20	L99	B	244	48	5D	17	L173	B	39	135	7A	14
L26	B	205	93	4B	5	L100	B	68	127	10B	13	L174	B	95	47	11A	10
L27	A	190	117	5A	12	L101	B	61	134	10B	13	L175	A	264	47	11D	22
L28	A	166	139	7A	12	L102	B	68	105	10E	13	L176	A	254	64	11E	22
L29	B	244	93	10B	17	L103	B	66	108	10E	13	L177	A	263	42	3B	22
L30	B	195	104	3A	12	L104	B	13	36	9C	15	L178	B	95	119	10C	8
L31	B	232	111	7D	20	L105	B	27	31	10C	15	L179	B	76	139	9A	13
L32	B	227	82	9E	20	L106	B	160	143	7B	12	L180	B	76	116	9D	13
L33	B	247	93	10C	17	L107	B	153	143	8B	12	L181	B	20	126	7B	14
L34	A	39	46	3A	16	L108	B	181	142	1B	20	L182	B	12	109	11B	14
L35	B	220	86	9D	20	L109	B	291	134	9D	18	L183	B	84	77	2A	8
L36	A	259	138	10A	20	L110	B	286	130	9D	18	L184	A	120	105	11D	10
L37	B	282	95	3B	19	L111	B	23	59	7B	15	L185	B	84	88	3A	8
L38	B	198	129	4B	20	L112	B	29	120	6B	14	L186	B	65	78	2B	8
L39	A	199	133	3D	20	L113	B	261	32	3C	17	L187	B	64	89	3B	8
L40	A	277	128	9B	18	L114	B	298	135	10D	18	L188	B	76	79	2C	8
L41	B	204	133	4B	20	L115	B	299	127	11D	18	L189	B	284	49	8A	19
L42	B	220	112	6E	20	L116	B	298	135	10E	18	L190	B	288	55	8A	19
L43	B	225	120	5E	20	L117	B	15	125	10B	14	L191	B	293	54	8A	19
L44	B	227	143	7B	20	L118	B	93	137	4C	8	L192	B	297	52	9A	19
L45	B	231	136	8B	20	L119	B	132	72	7E	4	L193	B	291	55	8B	19
L46	B	220	143	6B	20	L120	A	94	60	6E	4	L194	B	296	55	9B	19
L47	B	215	137	6B	20	L121	A	131	61	8B	21	L195	A	221	128	7A	20
L48	B	232	56	6F	12	L122	A	138	68	9B	21	L196	A	239	53	6D	17
L49	B	125	133	3B	13	L123	B	175	64	4E	6	L197	B	73	88	3C	8
L50	B	125	111	3E	13	L124	B	207	104	3A	12	L198	A	80	74	8A	8
L51	B	194	141	3B	20	L125	B	178	112	5B	12	L199	A	84	87	9A	8
L52	B	238	136	10B	20	L126	A	92	70	9D	10	L200	A	63	82	9B	8
L53	B	281	56	7B	19	L127	A	115	73	10E	10	L201	A	66	74	8B	8
L54	B	283	74	4B	19	L128	A	151	137	10E	10	L202	B	274	132	8D	18
L55	B	283	121	11D	18	L129	A	134	136	10D	10	L203	A	71	88	9C	8
L56	A	194	97	7B	5	L130	A	85	22	1E	11	L204	A	76	77	8C	8
L57	A	175	89	6E	5	L131	A	55	31	1E	11	L205	A	89	135	6B	5
L58	B	183	133	2B	20	L132	B	12	81	4D	11	L206	B	11	47	7B	15
L59	B	177	132	1B	20	L133	B	12	62	4F	11	L207	A	292	137	7F	19
L60	A	190	133	4C	20	L134	B	290	142	9D	18	N1	A	285	79	4C	19
L61	A	296	119	3C	19	L135	B	276	49	7A	19	N1	A	285	79	4D	19
L62	A	225	36	5E	12	L136	A	84	51	11E	10	N1	A	285	79	4E	19
L63	A	277	69	5E	19	L137	A	25	88	6E	15	N1	A	285	79	6D	19
L64	B	85	126	8B	13	L138	A	54	92	2E	16	N1	A	285	79	6D	19
L65	B	85	103	8E	13	L139	B	95	142	4C	8	N2	A	283	98	1C	19
L66	B	128	40	1E	3	L140	A	54	60	2E	16	N2	A	283	98	1D	19
L67	A	100	55	5E	4	L141	B	93	114	10C	8	N2	A	283	98	3E	19
L68	B	126	77	5E	4	L142	A	54	97	2D	16	N2	A	283	98	4E	19
L69	B	264	115	2E	18	L143	A	53	110	1D	16	N2	A	283	98	6E	19


This document all rights reserved.

	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR		Sprache: de Lang.: de	Blatt: 6+ Sh.: 6+	Aei: 08.11 C.I.: 08.11
	Typ: SMIQ Type: SMIQ	Datum: 99-05-17 Date: 99-05-17	Abteilung: 1GPK Dpt: 1GPK	Name: HO Name: HO	Sachnr.: 1084.9800.01 XY Part No.: 1084.9800.01 XY

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. <i>Part</i>	Seite <i>Side</i>	X	Y	Planq. <i>Sqr</i>	Bl. <i>Pg</i>	el. Kennz. <i>Part</i>	Seite <i>Side</i>	X	Y	Planq. <i>Sqr</i>	Bl. <i>Pg</i>	el. Kennz. <i>Part</i>	Seite <i>Side</i>	X	Y	Planq. <i>Sqr</i>	Bl. <i>Pg</i>
N3	A	102	90	10A	22	N27	A	181	92	6C	5	R7	A	39	60	3A	16
N3	A	102	90	10C	22	N28	B	205	108	3B	12	R8	A	169	125	7A	12
N3	A	102	90	11D	22	N29	A	25	84	4D	15	R9	A	192	64	9D	3
N4	A	94	108	4E	8	N29	A	25	84	6E	15	R10	A	207	56	9E	3
N4	A	94	108	6B	8	N30	A	11	27	2E	11	R11	A	282	143	9C	18
N4	A	94	108	6C	8	N30	A	11	27	3E	11	R12	B	190	77	4C	6
N4	A	94	108	6D	8	N30	A	11	27	8C	11	R13	A	298	84	5C	19
N4	A	94	108	6E	8	N31	B	191	43	3A	6	R14	A	295	109	3C	19
N5	B	229	90	8E	20	N31	B	191	43	5E	6	R15	A	298	64	7D	19
N6	A	257	103	2B	18	N32	A	41	67	7E	16	R16	B	286	39	8C	19
N6	A	257	103	3A	18	N32	A	41	67	9B	16	R17	A	198	72	6E	3
N7	A	151	52	8C	21	N33	B	188	94	1E	5	R18	A	192	70	9D	3
N7	A	151	52	8C	21	N33	B	188	94	3B	5	R19	A	29	83	5D	15
N7	A	151	52	9E	21	N34	A	182	54	3B	21	R20	B	116	112	4E	13
N8	A	143	76	10A	21	N34	A	182	54	3E	21	R21	B	116	135	4B	13
N8	A	143	76	10C	21	N35	A	246	74	5E	22	R22	B	279	97	3A	19
N8	A	143	76	8E	21	N35	A	246	74	8D	22	R23	A	112	67	4B	9
N9	A	169	48	10E	21	N37	A	44	117	11D	14	R24	A	137	75	10A	21
N9	A	169	48	5B	21	N37	A	44	117	4E	14	R25	A	133	69	4D	9
N9	A	169	48	6B	21	N37	A	44	117	6C	14	R26	B	253	128	6E	18
N10	B	165	51	7E	6	N38	B	247	85	9C	17	R27	B	89	131	7B	13
N10	B	165	51	8B	6	N39	A	280	20	10C	19	R28	B	87	134	7C	13
N10	B	165	51	9B	6	N39	A	280	20	2E	19	R29	B	87	111	7E	13
N11	B	177	78	6B	6	N40	A	288	49	10D	19	R30	B	89	108	7E	13
N11	B	177	78	6E	6	N40	A	288	49	1E	19	R31	A	100	67	3C	10
N11	B	177	78	7C	6	N41	A	285	34	11C	19	R32	A	108	65	3D	10
N12	B	171	92	2B	5	N41	A	285	34	2E	19	R33	B	210	111	3B	12
N13	A	118	69	3B	9	N42	A	193	76	6E	3	R34	B	212	108	2B	12
N13	A	118	69	3C	9	N42	A	193	76	9D	3	R35	B	241	133	10B	20
N13	A	118	69	4E	9	N42	A	193	76	9E	3	R36	A	264	116	7B	18
N14	A	226	81	3E	12	N43	A	119	108	11E	10	R37	B	248	81	9C	17
N14	A	226	81	8D	12	N43	A	119	108	2B	10	R38	A	238	118	6B	18
N15	A	221	89	4E	12	N43	A	119	108	3B	10	R39	A	237	24	2B	17
N15	A	221	89	9D	12	N44	B	15	123	11B	14	R40	B	245	45	5C	17
N16	A	101	70	2C	10	N45	B	28	123	6B	14	R41	B	248	63	7C	17
N16	A	101	70	2D	10	N46	B	83	106	8E	13	R42	B	279	76	4A	19
N16	A	101	70	9E	10	N47	B	83	129	8B	13	R43	B	279	56	7A	19
N16	A	101	70	5A	7	N48	A	112	129	2E	10	R44	A	146	84	7A	21
N16	A	101	70	5D	7	N48	A	112	129	3E	10	R45	A	229	64	9B	3
N17	A	66	47	11E	10	N48	A	112	129	3E	5	R46	A	152	78	11D	21
N17	A	66	47	3C	10	N48	A	112	129	4E	5	R47	A	138	88	9A	21
N17	A	66	47	3D	10	N48	A	112	129	5A	5	R48	B	202	93	4C	5
N17	A	66	47	5B	9	N49	B	21	56	7B	15	R49	A	255	77	6E	22
N17	A	66	47	5D	9	P4	B	102	37	5D	3	R50	A	255	93	6C	22
N18	A	141	121	10E	10	P17	B	34	124	5C	14	R52	A	203	82	8D	3
N18	A	141	121	5C	10	P34	B	224	72	7D	12	R53	B	68	67	7B	7
N18	A	141	121	5D	10	P50	B	180	38	7C	6	R54	B	81	56	7C	7
N18	A	141	121	5E	10	P51	B	167	134	3B	11	R55	B	223	89	9D	20
N18	A	141	121	6D	10	P52	B	54	134	4C	11	R56	A	60	63	1E	16
N19	A	73	33	1E	11	P53	B	232	91	11D	12	R57	A	151	28	2C	3
N19	A	73	33	2B	11	P54	B	253	21	3C	17	R58	B	136	41	3C	3
N19	A	73	33	3B	11	P55	B	259	64	7C	17	R59	A	227	57	5E	3
N19	A	73	33	9B	9	P56	B	257	97	6E	22	R60	A	197	74	6E	3
N19	A	73	33	9D	9	P57	B	267	51	3A	22	R61	A	151	97	8B	21
N20	A	257	26	10D	19	P58	B	268	54	4A	22	R62	B	136	39	3B	3
N20	A	257	26	11B	19	P59	B	12	129	10C	14	R63	A	181	43	2B	21
N20	A	257	26	8C	19	P60	B	164	103	4E	4	R64	A	228	27	3A	17
N21	A	257	57	11D	22	P61	B	164	105	4F	4	R65	A	140	65	6C	21
N21	A	257	57	2B	22	P62	B	160	103	4E	4	R66	A	156	79	9D	21
N21	A	257	57	3A	22	P63	B	138	103	6E	10	R67	A	135	74	10A	21
N22	A	21	72	4E	11	P64	B	15	24	9C	11	R68	A	172	57	3E	21
N22	A	21	72	8B	11	P65	B	28	52	8D	11	R69	A	179	44	4F	21
N23	A	20	97	4E	11	P66	B	51	14	8B	9	R70	A	136	87	11D	21
N23	A	20	97	9B	11	P67	B	49	74	9A	16	R71	B	187	39	3A	6
N24	A	12	42	5E	11	P68	B	277	35	11C	19	R72	B	173	70	7A	6
N24	A	12	42	7C	11	P69	B	160	105	3E	4	R73	B	186	74	4B	6
N25	A	41	85	6E	16	P72	B	83	136	5C	8	R74	B	112	135	5B	13
N25	A	41	85	8B	16	P75	B	83	113	11C	8	R75	B	98	126	6C	13
N25	A	41	85	8C	16	R1	A	25	42	8D	11	R76	B	136	130	2C	13
N26	A	41	51	4E	16	R2	B	42	136	8E	14	R77	A	187	109	5A	12
N26	A	41	51	4E	16	R3	B	90	58	10E	4	R78	B	98	103	6E	13
N26	A	41	51	7E	16	R4	A	40	107	2E	15	R79	B	113	112	5D	13
N27	A	181	92	2E	5	R5	A	119	127	3E	5	R80	B	139	107	2E	13
N27	A	181	92	5D	5	R6	A	103	137	6B	5	R81	B	23	141	9B	14


Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved.

	Benennung: EE IQ-MODULATOR				Sprache:		Blatt:		Aer:	
	Designation: IQ-MODULATOR				Lang.: de		Sh.: 7 +		C.I.: 08.11	
Typ: SMIQ		Datum: 99-05-17		Abteilung: 1GPK		Name: HO		Sachnr.: 1084.9800.01 XY		
Type:		Date:		Dept:		Name:		Part No.:		

Nicht-Service-Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
R82	B	21	37	8C	15	R158	B	17	19	11B	15	R232	A	154	74	11D	21
R83	B	30	42	7C	15	R159	A	21	121	11E	14	R233	A	136	81	11B	21
R84	B	12	26	10A	15	R160	B	43	60	2B	16	R234	A	125	94	5F	21
R85	B	34	28	7C	15	R161	B	40	60	2A	16	R235	A	122	78	4F	21
R86	B	44	120	4B	14	R162	A	12	40	5D	11	R236	A	123	87	4F	21
R87	B	44	38	7E	15	R163	B	222	47	5D	12	R237	A	228	80	3E	12
R88	A	26	26	10D	15	R164	A	18	58	6D	11	R238	B	177	75	6B	6
R89	B	69	66	6B	7	R165	B	230	72	10E	20	R239	B	167	82	7C	6
R90	B	69	69	7B	7	R166	B	242	139	10B	20	R240	B	134	133	2B	13
R91	B	81	59	7C	7	R167	A	250	130	11C	20	R241	B	137	110	2E	13
R92	B	81	55	6C	7	R168	A	246	39	4E	17	R242	A	16	22	8C	15
R93	B	57	38	3E	7	R169	A	239	57	6D	17	R243	A	24	22	8E	15
R94	B	73	46	4F	7	R170	A	224	142	7A	20	R244	B	70	62	5B	7
R95	B	65	47	5B	7	R171	A	11	55	5E	11	R245	B	88	138	4B	8
R96	B	73	44	5C	7	R172	B	212	135	5C	20	R246	B	61	60	6B	7
R97	A	137	114	6E	10	R173	B	212	141	5C	20	R247	B	88	115	11C	8
R98	A	154	119	6D	10	R174	B	248	55	6C	17	R248	B	73	49	6C	7
R99	A	62	54	4C	10	R175	B	265	31	2C	17	R249	B	83	48	5C	7
R100	A	133	28	11C	10	R176	A	23	70	4E	11	R250	A	61	54	3B	10
R101	A	12	118	10E	14	R177	A	38	122	6E	14	R251	A	148	117	6E	10
R102	A	25	125	5E	14	R178	A	171	91	6E	5	R252	A	61	44	3D	10
R103	B	41	141	8D	14	R179	A	169	91	6E	5	R253	A	123	117	3A	10
R104	A	42	118	4E	14	R180	A	40	110	1D	15	R254	A	59	28	2B	11
R105	A	65	44	4D	10	R181	A	13	103	1E	15	R255	A	62	40	3B	11
R106	A	84	132	8D	10	R182	B	111	142	5B	13	R256	A	65	40	3C	11
R107	A	68	118	8E	10	R183	B	108	142	5B	13	R257	A	12	92	9B	11
R108	A	64	121	9D	10	R184	B	106	142	6B	13	R258	B	11	94	10A	11
R109	A	117	106	3B	10	R185	B	88	132	7B	13	R259	A	83	42	4D	9
R110	A	23	96	9A	11	R186	A	43	109	2D	15	R260	A	84	53	4B	9
R111	A	26	48	6D	11	R187	A	36	110	1D	15	R261	A	43	82	8B	16
R112	A	18	35	2E	11	R188	B	40	115	5B	14	R262	A	41	82	8D	16
R113	B	249	103	11C	17	R189	B	88	109	7E	13	R263	A	42	76	9B	16
R114	A	79	47	5D	9	R190	B	111	119	6E	13	R264	A	50	69	9B	16
R115	A	134	65	4E	9	R191	B	108	119	5E	13	R265	A	46	60	3E	16
R116	A	70	59	5B	9	R192	B	106	119	5E	13	R266	A	177	93	5D	5
R117	A	56	28	4E	9	R193	B	22	134	9B	14	R267	A	175	92	5C	5
R118	A	56	18	5E	9	R194	A	27	107	3D	15	R268	B	175	94	2B	5
R119	A	120	78	1E	9	R195	A	25	103	3E	15	R269	B	191	98	3C	5
R120	B	249	99	10C	17	R196	B	13	140	9C	14	R270	A	257	73	6F	22
R121	B	46	48	2B	16	R197	B	47	114	4C	14	R271	A	248	98	6D	22
R122	B	44	75	6B	16	R198	B	35	117	5B	14	R272	A	260	71	1B	22
R123	A	54	52	4E	16	R199	B	17	131	10B	14	R273	B	205	98	4C	5
R126	A	264	83	7E	22	R200	B	40	53	2B	16	R274	A	258	55	3A	22
R127	A	254	83	3C	22	R201	B	40	54	2B	16	R275	A	268	60	3A	22
R128	A	247	67	6A	17	R202	B	40	56	3B	16	R276	A	205	96	5C	5
R129	B	173	113	5B	12	R203	B	212	109	2B	12	R277	A	191	98	6C	5
R130	B	165	119	6B	12	R204	B	40	116	5B	14	R278	A	220	85	9D	12
R131	B	146	132	8A	12	R205	B	22	136	9B	14	R279	A	227	101	10E	12
R132	B	141	114	9B	12	R206	B	55	30	2B	7	R280	A	227	104	10E	12
R133	B	139	114	9B	12	R207	B	55	28	2B	7	R281	B	279	103	1B	19
R134	A	91	97	9A	22	R208	A	16	35	8C	11	R282	B	235	127	9B	20
R135	B	232	44	5C	12	R209	B	222	103	6F	20	R283	A	296	94	2D	19
R136	B	192	114	4B	12	R210	B	222	108	6F	20	R284	A	220	142	6A	20
R137	A	255	41	6B	17	R211	A	118	76	4E	9	R285	A	248	28	3B	17
R138	A	12	80	4D	11	R212	A	217	73	3E	12	R286	A	245	24	3B	17
R139	B	223	79	10D	20	R213	A	232	83	4E	12	R287	A	245	28	4B	17
R140	B	246	142	10A	20	R214	A	223	98	4E	12	R288	A	247	57	7B	17
R141	A	261	128	10C	20	R215	B	195	133	3C	20	R289	A	249	55	7B	17
R142	A	246	130	10C	20	R216	B	216	142	6B	20	R290	A	250	64	6B	17
R143	B	203	79	3E	6	R217	A	243	18	3C	17	R291	B	209	130	5B	20
R144	A	55	113	4E	14	R218	A	249	50	6C	17	R292	B	248	37	4C	17
R145	B	283	129	10D	18	R219	B	248	117	1E	18	R293	B	212	130	5C	20
R146	B	275	131	8D	18	R220	B	293	114	4C	18	R294	B	212	132	5B	20
R147	A	11	91	4D	11	R221	B	161	35	6B	21	R295	B	276	86	3B	19
R148	A	222	142	6A	20	R222	A	20	91	5E	11	R296	B	276	67	6B	19
R149	B	102	133	5B	13	R223	A	22	27	2E	11	R297	A	228	25	3B	17
R150	B	102	130	5B	13	R224	B	291	69	7D	19	R298	A	242	61	6B	17
R151	A	25	138	1E	14	R225	A	296	82	4E	19	R299	B	244	101	11C	17
R152	A	42	143	2E	14	R226	A	25	57	6E	11	R300	B	286	37	8C	19
R153	B	103	110	5D	13	R227	A	185	82	8D	3	R301	B	284	24	10C	19
R154	B	103	107	5D	13	R228	A	219	45	8B	3	R302	A	286	120	7E	19
R155	A	54	136	3E	14	R229	A	207	58	9D	3	R303	B	250	128	6E	18
R156	A	257	43	6B	17	R230	A	194	64	9E	3	R304	B	255	128	6E	18
R157	B	27	19	11C	15	R231	A	170	40	6B	21	R305	A	152	38	8C	21

Für diese Unterteile behalten wir uns alle Rechte vor.
For this document all rights reserved

	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR		Sprache: de Lang.: de		Blatt: 8 + Sh.: 8 +	Aei: 08.11 C.I.: 08.11
	Typ: SMIQ	Datum: 99-05-17 Date:	Abteilung: 1GPK Dpt:	Name: HO Name:	Sachnr.: 1084.9800.01 XY Part No.:	

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
R306	A	59	22	3A	11	R380	A	275	25	9D	19	R454	A	107	137	3E	10
R307	A	68	38	3B	11	R381	B	24	37	10C	15	R455	A	77	38	4A	11
R308	A	75	32	9B	9	R382	B	217	139	6C	20	R456	A	64	18	3A	11
R309	A	75	36	9B	9	R383	B	30	44	10E	15	R457	A	29	51	10D	11
R310	A	69	22	9D	9	R384	A	205	136	4A	20	R458	B	202	90	4B	5
R311	A	73	22	9D	9	R385	A	23	41	8C	11	R459	A	166	18	2E	3
R312	A	50	87	7A	16	R386	B	170	96	2B	5	R460	A	243	76	8D	22
R313	A	38	86	7C	16	R387	A	187	108	6A	12	R461	A	261	78	8D	22
R314	A	174	95	5D	5	R388	B	222	35	2D	12	R462	A	251	51	3A	22
R315	B	192	91	3B	5	R389	B	222	39	3D	12	R463	A	231	99	10D	12
R316	A	242	92	6C	22	R390	B	222	36	2D	12	R464	B	190	131	2B	20
R317	A	191	88	6C	5	R391	A	280	84	4E	19	R465	B	72	64	5B	7
R318	A	219	90	9D	12	R392	A	218	116	6D	20	R466	A	240	127	8B	20
R319	A	193	92	2E	5	R393	A	42	19	7C	9	R467	A	287	28	2F	19
R320	A	238	28	3A	17	R394	A	294	76	4F	19	R468	A	249	140	10A	20
R321	A	291	25	10B	19	R395	A	293	100	3F	19	R469	B	84	47	5C	7
R322	A	287	43	10D	19	R396	A	227	133	8A	20	R470	A	250	37	4E	17
R323	A	238	61	7B	17	R397	A	107	97	11E	22	R471	B	293	106	5C	18
R324	A	230	20	3B	17	R398	A	104	87	3A	9	R472	B	242	136	10B	20
R325	A	244	59	6B	17	R399	A	105	56	3C	9	R473	B	276	94	3A	19
R326	A	192	135	4C	20	R400	A	112	82	2F	9	R474	B	280	91	3B	19
R327	B	123	36	3B	3	R401	B	278	130	8E	18	R475	A	196	140	4A	20
R328	A	153	21	2C	3	R402	B	194	88	1E	5	R476	A	142	48	7C	21
R329	A	149	20	2D	3	R403	B	177	98	2E	5	R477	A	100	28	11A	10
R330	A	120	28	2D	3	R404	A	286	39	1F	19	R478	A	192	141	3C	20
R331	B	118	36	3A	3	R405	A	277	46	1E	19	R479	B	173	106	5B	12
R332	A	273	21	9E	19	R406	A	273	31	2E	19	R480	B	159	122	6B	12
R333	A	22	31	3E	11	R407	B	75	55	5F	7	R481	B	159	120	7B	12
R334	B	192	37	2C	21	R408	B	224	141	7B	20	R482	B	188	107	4B	12
R335	A	194	26	1C	21	R409	A	239	97	4C	22	R483	B	190	107	4B	12
R336	A	230	92	9D	12	R410	A	153	117	7D	10	R484	B	222	54	6E	12
R337	B	223	87	9D	20	R411	A	273	73	7E	19	R485	B	151	133	8B	12
R338	B	223	85	9D	20	R412	A	230	29	3A	17	R486	B	227	64	6D	12
R339	A	257	134	9A	20	R413	A	292	68	5E	19	R487	B	161	131	7B	12
R340	A	255	138	9A	20	R414	B	162	50	9B	6	R488	B	158	131	7B	12
R341	B	244	72	8C	17	R415	A	251	69	6A	17	R489	B	63	53	5B	7
R342	B	248	75	8C	17	R416	A	232	51	5E	12	R490	B	190	128	2C	20
R343	B	244	78	8C	17	R417	B	278	132	8E	18	R491	A	222	113	5D	20
R344	A	279	39	11C	19	R418	B	61	65	6E	7	R492	A	229	120	4D	20
R345	A	275	37	11D	19	R419	B	71	54	6F	7	R493	A	251	140	10C	20
R346	A	198	129	2C	20	R420	A	84	38	5C	9	R494	B	227	59	6E	12
R347	A	234	126	9B	20	R421	A	84	61	5A	9	R495	B	222	56	6E	12
R348	A	182	79	8C	3	R422	A	44	92	7B	16	R496	A	194	133	3C	20
R349	B	64	22	2D	7	R423	A	129	28	2B	3	R497	A	232	129	9C	20
R350	B	64	33	2D	7	R424	A	143	35	3C	3	R498	A	233	138	9C	20
R351	B	159	118	7B	12	R425	A	146	28	2C	3	R499	A	231	101	10D	12
R352	A	39	37	7A	9	R426	A	150	35	3D	3	R500	A	243	140	10C	20
R353	A	72	59	5E	7	R427	B	113	36	3D	3	R501	A	35	39	7A	9
R354	B	230	131	8C	20	R428	A	124	28	2A	3	R502	A	39	16	7C	9
R355	A	250	136	11C	20	R429	A	141	28	2B	3	R503	A	37	31	7B	9
R356	A	95	96	9A	22	R430	A	187	111	4A	12	R504	A	39	26	7B	9
R357	B	229	139	7B	20	R431	A	261	49	3B	22	R505	B	293	129	10D	18
R358	B	215	133	5C	20	R432	A	244	51	5D	17	R506	A	218	137	6A	20
R359	B	222	106	6E	20	R433	B	232	100	7D	20	R507	B	265	29	2C	17
R360	A	106	88	11D	22	R434	A	136	68	10B	21	R508	B	248	53	5C	17
R361	A	274	80	5D	19	R435	A	140	93	9A	21	R509	B	248	58	6C	17
R362	A	292	92	2D	19	R436	A	198	127	3C	20	R510	B	265	34	3C	17
R363	B	220	139	6C	20	R437	B	151	128	9B	12	R511	B	295	52	9B	19
R364	A	179	97	2E	5	R438	B	150	135	8B	12	R512	A	257	35	12B	19
R365	B	29	65	6C	15	R439	B	222	45	5E	12	R513	B	276	91	3B	19
R366	B	29	64	6C	15	R440	B	245	139	11B	20	R514	A	114	119	4A	10
R367	B	28	74	5C	15	R441	B	240	139	10B	20	R515	B	76	44	5C	7
R368	B	28	72	5C	15	R442	B	36	113	5B	14	R517	A	223	135	5A	20
R369	B	60	37	2A	7	R443	B	19	131	10B	14	R518	A	235	142	7A	20
R370	B	57	37	2A	7	R444	B	230	73	10E	20	R519	A	290	47	10D	19
R371	B	59	23	2B	7	R445	A	179	15	1A	21	R520	A	61	52	3C	10
R372	B	59	21	2B	7	R446	B	46	84	6B	16	R521	A	61	48	3D	10
R373	B	84	27	10B	9	R447	B	200	131	4B	20	R522	A	63	134	8F	10
R374	B	81	25	10B	9	R448	B	301	141	9C	18	R523	A	262	21	11B	19
R375	B	78	20	10D	9	R449	B	225	114	5E	20	R524	B	140	130	2B	13
R376	B	75	20	10D	9	R450	B	168	77	7C	6	R525	B	139	133	2B	13
R377	B	205	139	5B	20	R451	B	173	43	10B	6	R526	B	142	110	2E	13
R378	A	275	103	3E	19	R452	B	169	77	7B	6	R527	B	146	110	2E	13
R379	B	219	139	6C	20	R453	A	26	68	5C	15	R528	A	228	135	8A	20

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved.



ROHDE & SCHWARZ

Benennung: EE IQ-MODULATOR
Designation: IQ-MODULATOR

Sprache:
Lang.: de

Blatt:
Sh.: 9 +

Aei:
C.I.: 08.11

Typ: SMIQ

Datum: 99-05-17

Abteilung: 1GPK

Name: HO

Sachnr.: 1084.9800.01 XY
Part No.:

Nicht-SERVICE-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
R529	B	291	129	10E	18	R603	B	113	109	5D	13	R677	A	248	109	6A	18
R530	B	296	129	10E	18	R604	B	126	106	3E	13	R678	A	259	117	7A	18
R531	A	248	143	9A	20	R605	B	120	116	4E	13	R679	A	261	119	7B	18
R532	A	197	143	3A	20	R606	B	121	104	4D	13	R680	A	247	117	6A	18
R533	B	258	37	3C	17	R607	B	127	117	3D	13	R681	A	154	49	7F	21
R534	B	253	37	4C	17	R608	A	85	104	3E	8	R682	B	244	106	11C	17
R535	A	194	66	9C	3	R609	B	15	92	3B	15	R684	A	276	84	4D	19
R536	A	81	32	10A	9	R610	B	72	66	4B	7	R685	A	290	94	2D	19
R537	A	76	24	10C	9	R611	B	84	41	4C	7	R686	A	145	86	9A	21
R538	A	76	14	10E	9	R612	B	78	42	5D	7	R687	A	105	82	3A	9
R539	A	66	18	10C	9	R613	B	61	55	5B	7	R688	A	120	65	3B	9
R540	B	12	91	10A	11	R614	B	14	28	10B	15	R689	A	127	72	3C	9
R541	B	45	25	11D	7	R615	A	200	96	7B	5	R690	A	107	53	3C	9
R542	B	45	32	11B	7	R616	A	61	139	10A	10	R691	B	197	127	4B	20
R543	A	245	99	6C	22	R617	B	74	40	4B	7	R692	B	228	120	5E	20
R544	A	28	47	10D	11	R618	B	73	41	4D	7	R693	B	231	143	7B	20
R545	A	81	59	5B	9	R619	A	63	60	3B	10	R694	A	217	134	6B	20
R546	A	226	73	8D	12	R620	A	114	115	4A	10	R695	B	108	62	3C	4
R547	A	276	143	8C	18	R621	A	64	105	10C	10	R696	B	100	62	3C	4
R548	A	246	52	5D	17	R622	A	255	38	8C	19	R697	B	107	47	3D	4
R549	A	277	135	7C	18	R623	A	62	136	10A	10	R698	B	105	62	3D	4
R550	A	79	44	5C	9	R624	A	61	50	3C	10	R699	B	110	69	4D	4
R551	B	180	110	4B	12	R625	A	120	115	4B	10	R700	B	110	67	4D	4
R552	B	161	114	6B	12	R626	A	26	93	10B	11	R701	B	111	71	4C	4
R553	B	276	74	5A	19	R627	A	294	92	5C	19	R702	B	111	73	4C	4
R554	B	276	54	7A	19	R628	A	12	33	8C	11	R703	B	111	93	6C	4
R555	A	207	91	5C	5	R629	A	14	37	8C	11	R704	B	111	96	7C	4
R556	B	116	115	4E	13	R630	A	56	39	8A	9	R705	B	110	88	7D	4
R557	B	116	111	4E	13	R631	A	41	39	8A	9	R706	B	110	91	6D	4
R558	B	116	134	4B	13	R632	A	41	37	7A	9	R707	B	111	90	7D	4
R559	B	116	138	4B	13	R633	A	57	37	7A	9	R708	B	125	86	8D	4
R560	A	187	105	6A	12	R634	A	56	26	8D	9	R709	B	110	97	8C	4
R561	A	148	58	8C	21	R635	A	42	26	8D	9	R710	B	125	92	7C	4
R562	A	145	56	9C	21	R636	A	42	24	7D	9	R711	A	286	68	5E	19
R563	A	132	54	8C	21	R637	A	56	24	7D	9	R712	B	18	92	3C	15
R564	A	279	37	11C	19	R638	A	40	34	6B	9	R713	A	231	55	5E	12
R565	A	273	23	8D	19	R639	A	205	94	7B	5	R714	B	195	110	3B	12
R566	B	167	45	9B	6	R640	A	144	83	10B	21	R715	A	136	35	10A	3
R567	A	177	57	5E	21	R641	B	50	52	2A	16	R716	A	223	68	9A	3
R568	A	129	36	7A	3	R642	A	50	89	7B	16	R717	A	118	119	3A	10
R569	A	129	39	3E	3	R643	A	36	86	7C	16	R718	B	178	88	2B	5
R570	A	172	72	5E	21	R644	B	40	69	4B	16	R719	A	202	80	8E	3
R571	A	177	72	5F	21	R645	A	266	56	4B	22	R720	A	126	140	3E	10
R572	A	35	36	7A	9	R646	A	252	83	4C	22	R721	B	196	41	2B	6
R573	A	38	21	7C	9	R647	A	294	74	4D	19	R722	A	20	33	9C	15
R574	B	150	72	4A	4	R648	B	173	117	5A	12	R723	A	26	32	9C	15
R575	B	136	75	5A	4	R649	B	169	122	6A	12	R724	A	28	23	9E	15
R576	B	150	65	5B	4	R650	B	147	132	9A	12	R725	A	28	27	9D	15
R577	B	150	70	5B	4	R651	A	255	46	6C	17	R726	B	274	127	8C	18
R578	B	150	60	3B	4	R652	B	225	44	5D	12	R727	A	294	84	4C	19
R579	B	150	54	3B	4	R653	B	221	67	7D	12	R728	A	275	75	6E	19
R580	B	134	62	3A	4	R654	B	224	67	7D	12	R729	A	294	71	4C	19
R581	B	150	63	3A	4	R655	A	224	73	7D	12	R730	B	207	106	3A	12
R582	B	175	58	7A	4	R656	A	221	73	7D	12	R731	B	13	78	5A	15
R583	B	174	58	7A	4	R657	A	224	84	8D	12	R732	A	241	86	6D	22
R584	B	173	55	7B	4	R658	B	190	118	4A	12	R733	A	286	109	2C	19
R585	B	173	61	7B	4	R659	B	262	82	9D	17	R734	B	114	39	3B	3
R586	A	154	83	11C	21	R660	B	227	75	10E	20	R735	B	116	39	3B	3
R587	B	196	60	2C	6	R661	A	276	88	3C	19	R736	B	118	39	3B	3
R588	A	282	71	5F	19	R662	B	239	142	10B	20	R737	B	120	39	3B	3
R589	B	196	47	2A	6	R663	A	294	96	2D	19	R738	B	122	39	3B	3
R590	B	201	39	2A	6	R664	A	299	108	3C	19	R739	B	124	39	3B	3
R591	B	199	66	3C	6	R665	B	287	128	11D	18	R740	B	126	39	3B	3
R592	B	199	68	3C	6	R666	A	280	109	1C	19	R741	B	136	44	5C	3
R593	B	172	75	7B	6	R667	A	98	93	9B	22	R742	B	136	46	5C	3
R594	B	205	79	3D	6	R668	A	145	95	9A	21	R743	B	136	48	5C	3
R595	B	112	132	5B	13	R669	B	260	34	3C	17	R744	B	136	50	5C	3
R596	B	100	130	6B	13	R670	B	252	63	6C	17	R745	B	136	52	5C	3
R597	A	110	136	3E	5	R671	A	280	61	6C	19	R746	B	136	54	5C	3
R598	B	126	129	3C	13	R672	A	281	90	6D	19	R747	B	136	56	5C	3
R599	B	127	140	3B	13	R673	A	301	65	7D	19	R748	B	136	58	5C	3
R600	B	120	139	4C	13	R674	B	30	112	1C	15	R749	A	153	17	1B	3
R601	B	100	107	6E	13	R675	A	154	59	7E	21	R750	A	167	20	1D	3
R602	B	121	127	4B	13	R676	A	156	59	7E	21	R751	B	139	51	2A	4

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved.

	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR		Sprache: de	Blatt: 10 +	Aei: 08.11
	Typ: SMIQ	Datum: 99-05-17	Abteilung: 1GPK Dpt:	Name: HO	Sachnr.: 1084.9800.01 XY Part No.:

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
R752	B	125	97	8A	4	R826	B	221	119	6F	20	R900	A	283	26	3F	19
R753	B	139	96	9A	4	R827	B	221	117	5F	20	R901	A	260	81	10E	22
R754	A	134	85	3C	21	R828	B	221	116	5F	20	R902	B	294	50	9B	19
R755	A	138	79	11B	21	R829	A	283	37	11B	19	R903	A	287	54	10E	19
R756	B	171	71	8B	6	R830	A	281	39	11E	19	R904	B	253	34	3C	17
R757	B	14	31	10B	15	R831	A	244	49	5D	17	R905	A	18	75	6E	15
R758	A	24	30	10D	15	R832	A	273	29	9D	19	R906	B	241	105	11B	17
R759	A	28	25	10D	15	R833	A	136	39	10A	3	R907	A	275	35	11D	19
R760	B	90	142	4B	8	R834	A	163	41	6B	21	R908	A	19	89	6E	15
R761	B	90	119	11B	8	R835	B	173	47	9C	6	R909	B	175	106	5B	12
R762	A	112	119	4A	10	R836	A	151	119	6D	10	R910	A	37	88	7D	16
R763	B	12	88	10A	11	R837	A	75	42	5C	9	R911	B	142	86	5A	4
R764	A	256	87	4C	22	R838	A	79	57	5B	9	R912	A	154	80	11D	21
R765	B	228	41	5D	12	R839	A	54	69	10B	16	R913	B	201	88	4C	5
R766	A	34	29	7B	9	R840	B	110	75	11C	4	R914	A	247	81	5E	22
R767	A	36	23	7C	9	R841	B	110	82	8C	4	R915	A	27	96	9A	11
R768	A	229	106	11D	12	R842	B	111	80	5C	4	R916	A	197	35	2E	21
R769	A	280	104	1C	19	R843	B	102	47	2C	4	R917	A	218	43	8B	3
R770	B	223	77	10E	20	R844	B	102	127	7B	13	R918	A	231	65	8A	3
R771	B	236	141	11B	20	R845	B	102	104	7E	13	R919	A	136	77	11B	21
R772	B	282	126	11D	18	R846	B	145	135	9A	12	R920	A	257	71	6F	22
R773	B	175	70	6B	6	R847	A	102	35	4E	3	R921	A	288	39	10B	19
R774	A	287	77	6C	19	R848	B	104	133	5B	13	R922	B	297	48	10B	19
R775	A	282	87	6D	19	R849	B	18	97	3C	15	R923	B	142	128	10B	12
R776	A	96	90	10B	22	R850	B	104	110	5D	13	R924	B	149	112	10B	12
R777	A	205	134	5A	20	R851	B	26	140	8B	14	R925	A	252	130	11C	20
R778	A	14	64	7A	11	R852	B	26	136	8B	14	R926	B	282	133	8E	18
R779	A	246	47	5E	17	R853	B	49	58	2B	16	R927	A	293	52	9E	19
R780	A	220	116	6D	20	R854	B	165	115	5B	12	R928	A	29	79	5D	15
R781	A	226	131	8A	20	R855	B	168	128	7B	12	R931	A	243	81	8A	17
R782	A	20	24	9C	11	R856	B	262	88	9D	17	R932	A	289	52	10E	19
R783	A	206	50	10D	3	R857	B	182	116	4B	12	R933	B	224	65	7D	12
R784	A	194	45	10E	3	R858	B	279	91	3B	19	R934	B	220	65	7E	12
R785	B	27	20	11C	15	R859	B	36	121	5B	14	R935	B	179	78	6B	6
R786	B	27	16	11C	15	R860	B	15	130	10B	14	R936	A	38	74	9D	16
R787	B	16	20	11B	15	R861	A	17	106	2E	15	R937	B	198	70	3C	6
R788	B	16	16	11B	15	R862	A	27	83	4D	15	R938	A	29	77	4D	15
R789	B	49	84	6A	16	R863	B	226	138	7C	20	R939	B	207	135	5B	20
R790	A	54	54	3E	16	R864	B	226	137	7C	20	R940	A	288	33	11E	19
R791	A	169	52	5B	21	R865	A	277	19	8D	19	R941	A	290	37	11E	19
R792	A	185	53	4A	21	R866	A	264	95	10D	22	R942	B	195	77	4C	6
R793	A	176	68	4B	21	R867	A	67	105	10C	10	R943	A	194	131	4D	20
R794	A	171	64	4C	21	R868	A	83	57	5A	9	R944	A	38	76	9D	16
R795	A	128	133	3E	10	R869	A	35	92	7D	16	R945	B	282	37	9D	19
R796	A	135	123	5E	10	R870	A	219	70	9A	3	R946	B	283	37	9D	19
R797	A	135	118	5E	10	R871	A	229	61	9A	3	R947	A	147	89	9A	21
R798	A	135	121	5E	10	R872	A	158	127	5C	10	R948	A	147	91	9A	21
R799	A	135	129	5D	10	R873	B	25	86	4C	15	R949	A	112	84	2B	9
R800	A	135	126	5D	10	R874	A	81	38	5C	9	R950	A	112	86	2B	9
R801	A	160	121	5D	10	R875	B	226	135	8C	20	R951	A	111	56	2C	9
R802	A	158	119	6D	10	R876	A	139	73	10C	21	R952	A	111	58	2C	9
R803	A	160	124	6C	10	R877	B	203	136	4B	20	R953	A	54	71	10B	16
R804	A	161	129	5B	10	R878	B	162	52	8B	6	R954	B	208	138	5B	20
R805	A	126	135	3E	10	R879	A	98	65	2C	10	R955	A	243	67	6A	17
R806	A	255	53	2B	22	R880	A	158	131	5B	10	R956	A	122	119	3A	10
R807	B	26	92	7A	11	R881	A	106	67	2D	10	R957	A	67	59	5B	9
R808	A	14	84	8A	11	R882	A	107	133	2E	10	R958	A	81	49	5D	9
R809	A	18	62	8B	11	R883	A	114	106	2A	10	R959	A	245	105	10B	17
R810	B	293	110	5C	18	R884	B	217	112	6E	20	R960	A	245	103	10B	17
R811	A	290	27	11C	19	R885	B	233	133	8B	20	R961	A	243	109	10A	17
R812	A	45	48	4E	16	R886	A	246	35	4E	17	R962	A	243	111	10A	17
R813	A	38	53	5E	16	R887	A	239	22	2C	17	R963	A	288	70	5E	19
R814	B	205	128	4C	20	R888	B	223	144	6B	20	R964	A	42	74	9D	16
R815	B	202	128	4C	20	R889	B	237	127	9B	20	R965	A	295	102	6E	19
R816	B	190	75	4B	6	R890	B	278	135	8E	18	R966	B	248	102	11C	17
R817	B	140	131	2B	13	R891	B	277	102	2B	19	R967	B	265	111	3C	18
R818	B	145	110	2E	13	R892	A	291	23	2E	19	R969	B	88	141	5B	8
R819	A	220	48	8C	3	R893	B	248	38	4C	17	R970	B	88	118	11C	8
R820	A	192	68	10C	3	R894	B	276	83	4B	19	R971	A	118	66	3B	9
R821	B	43	86	7B	16	R895	B	276	63	6B	19	R972	A	129	71	3C	9
R822	B	288	27	9C	19	R896	A	258	95	9D	22	R973	A	24	106	3E	15
R823	B	222	50	6E	12	R897	A	64	38	2A	11	R974	A	21	112	3D	15
R824	B	230	69	10E	20	R898	B	244	66	7C	17	R975	A	251	101	1B	18
R825	B	203	128	4C	20	R899	B	248	69	7C	17	R976	A	23	110	2D	15

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved.



ROHDE & SCHWARZ

Benennung: EE IQ-MODULATOR
Designation: IQ-MODULATOR

Sprache:
Lang.: de

Blatt:
Sh.: 11 +

Aei:
C.I.: 08.11

Typ: SMIQ

Datum: 99-05-17

Abteilung: 1GPK


Name: HO

Sachnr.: 1084.9800.01 XY
Part No.:

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
R977	B	21	141	9B	14	R1051	A	140	63	10B	21	R1125	A	103	112	4F	8
R978	B	46	120	4B	14	R1052	B	267	134	7E	18	R1126	A	167	107	4E	4
R979	A	76	64	5D	7	R1053	A	20	64	8B	11	R1127	A	142	110	4F	4
R980	A	252	109	1B	18	R1054	B	11	72	5B	15	R1128	A	154	110	3F	4
R981	A	72	67	5A	7	R1055	A	16	64	8A	11	R1129	A	128	116	3A	10
R982	B	36	126	5C	14	R1056	A	41	96	7C	16	R1130	A	76	68	4D	7
R983	B	87	136	4C	8	R1057	A	46	93	7A	16	R1131	A	68	65	4A	7
R984	B	87	113	11C	8	R1058	A	290	50	10D	19	R1132	A	280	143	8C	18
R985	B	125	69	3C	3	R1059	B	11	79	5A	15	R1133	A	284	143	9C	18
R986	B	35	128	5C	14	R1060	A	286	113	7E	19	R1134	A	287	143	9C	18
R987	A	35	128	10C	14	R1061	A	251	55	1A	22	R1135	B	18	141	9B	14
R988	A	259	101	2B	18	R1062	A	25	129	1E	14	R1136	B	46	117	4B	14
R989	A	27	127	10C	14	R1063	A	285	17	10C	19	R1137	A	105	121	2A	10
R990	A	14	122	10E	14	R1064	A	255	24	9C	19	R1138	B	114	128	6A	13
R991	A	254	107	2B	18	R1065	A	266	27	10D	19	R1139	B	114	105	6D	13
R992	A	42	124	5C	14	R1066	B	26	82	4C	15	R1140	B	23	137	9B	14
R993	A	40	122	6C	14	R1067	A	255	34	8C	19	R1141	B	38	112	5B	14
R994	B	285	57	6B	19	R1068	A	263	35	10D	19	R1142	B	43	113	4B	14
R995	B	289	77	5B	19	R1069	B	15	85	6A	15	R1143	B	21	133	10B	14
R996	B	287	90	2C	19	R1070	A	13	53	8C	11	R1144	A	252	120	6B	18
R997	A	27	123	5E	14	R1071	A	15	124	1F	14	R1145	A	247	119	6B	18
R998	B	167	68	9E	4	R1072	A	34	143	2E	14	R1146	B	261	117	2E	18
R999	B	45	69	4B	16	R1073	B	150	87	11A	4	R1147	B	261	115	2E	18
R1000	B	45	65	3B	16	R1074	A	27	139	2F	14	R1148	B	280	115	4D	18
R1001	B	44	66	4B	16	R1075	B	43	35	9E	7	R1149	B	280	114	4D	18
R1002	A	265	110	3A	18	R1076	B	42	21	9C	7	R1150	A	259	121	7B	18
R1003	A	254	111	3B	18	R1077	B	48	38	9B	7	R1151	A	259	115	7A	18
R1004	A	15	58	9D	11	R1078	B	37	28	9A	7	R1152	B	265	108	3C	18
R1005	B	182	43	5E	6	R1079	B	56	23	11C	7	R1153	A	37	105	2E	15
R1006	B	166	75	6E	6	R1080	B	35	24	11E	7	R1154	B	18	64	6C	15
R1007	B	179	48	7E	6	R1081	B	53	28	11A	7	R1155	B	18	60	6C	15
R1008	B	166	42	7E	6	R1082	B	53	30	11C	7	R1156	A	13	111	3D	15
R1009	B	189	77	6E	6	R1083	B	73	33	2C	7	R1157	A	21	104	3F	15
R1010	B	189	49	6E	6	R1084	B	67	23	2C	7	R1158	A	27	103	3E	15
R1011	A	173	92	6E	5	R1085	B	67	21	2C	7	R1159	A	29	105	3D	15
R1012	A	188	79	8D	3	R1086	B	73	25	2C	7	R1160	B	19	63	6B	15
R1013	A	138	55	9D	21	R1087	B	49	20	10C	7	R1161	B	285	126	11E	18
R1014	A	155	42	9E	21	R1088	B	49	25	10C	7	R1162	B	290	126	11E	18
R1015	A	154	66	8E	21	R1089	B	42	25	10D	7	R1163	B	288	126	11D	18
R1016	A	140	81	8F	21	R1090	B	41	21	10E	7	R1164	A	64	131	10B	10
R1017	A	166	56	10D	21	R1091	B	43	27	10A	7	R1165	A	148	104	3E	4
R1018	A	172	46	10E	21	R1092	B	46	28	10A	7	R1166	A	107	131	5B	5
R1019	A	190	81	8D	3	R1093	B	48	32	10B	7	R1167	A	115	127	3E	5
R1020	A	200	98	7B	5	R1094	B	46	33	10B	7	R1168	A	126	131	4E	5
R1021	B	177	127	1C	20	R1095	A	13	51	8C	11	R1169	A	126	129	4E	5
R1022	B	187	79	5B	6	R1096	A	252	115	6A	18	R1170	B	61	95	3B	8
R1023	B	164	66	6A	6	R1097	B	48	23	11D	7	R1171	B	61	75	2B	8
R1024	A	253	57	2A	22	R1098	B	43	25	11D	7	R1172	B	78	93	3D	8
R1025	B	16	81	6A	15	R1099	B	45	27	11A	7	R1173	B	79	74	2D	8
R1026	A	26	45	9B	11	R1100	B	48	30	11B	7	R1174	B	68	88	3E	8
R1027	B	180	89	2C	5	R1101	B	62	33	3A	7	R1175	B	67	72	2E	8
R1028	A	291	105	6E	19	R1102	B	70	33	3C	7	R1176	A	72	77	8E	8
R1029	B	15	79	6B	15	R1103	A	54	127	3E	14	R1177	A	81	90	9B	8
R1030	B	274	20	10C	19	R1104	A	46	140	3F	14	R1178	A	79	82	8B	8
R1031	B	16	82	6A	15	R1105	B	12	131	10C	14	R1179	A	66	67	8C	8
R1032	B	24	112	2C	15	R1106	B	12	132	10C	14	R1180	A	67	90	9C	8
R1033	A	262	37	10D	19	R1107	A	19	141	9D	14	R1181	A	80	78	8D	8
R1034	A	37	35	6B	9	R1108	A	21	123	10E	14	R1182	A	78	90	9D	8
R1035	A	184	73	6F	3	R1109	A	38	124	6E	14	R1183	A	69	90	9E	8
R1036	A	207	74	10D	3	R1110	A	27	135	4D	14	R1184	A	76	117	5E	8
R1037	A	186	73	7F	3	R1111	B	125	115	3B	10	R1185	A	91	106	6B	8
R1038	A	207	78	10D	3	R1112	B	28	115	2C	15	R1186	A	105	116	6D	8
R1039	B	247	99	10C	17	R1113	B	22	92	4C	15	R1187	A	105	108	6E	8
R1040	B	294	112	4C	18	R1114	A	17	103	3F	15	R1188	A	88	117	6C	8
R1041	A	18	64	8A	11	R1115	A	12	113	3D	15	R1189	B	80	74	2A	8
R1042	A	27	66	9B	11	R1116	A	54	141	12C	14	R1190	B	80	93	3A	8
R1043	A	255	30	9C	19	R1117	A	54	125	7C	14	R1191	A	87	108	6C	8
R1044	A	253	26	8B	19	R1118	A	78	68	4D	7	R1192	A	99	119	6E	8
R1045	A	253	36	8C	19	R1119	A	74	68	4A	7	R1193	A	96	104	6F	8
R1046	A	253	32	8B	19	R1120	B	27	137	8B	14	R1194	A	95	119	6D	8
R1047	A	262	32	10D	19	R1121	A	125	115	2A	10	R1195	A	87	106	6B	8
R1048	A	266	35	10D	19	R1122	A	127	119	3A	10	R1196	A	101	120	6D	8
R1049	A	266	29	10C	19	R1123	B	17	95	3B	15	R1197	A	109	106	6E	8
R1050	A	268	33	10C	19	R1124	A	88	114	4E	8	R1198	A	90	121	6C	8


Rohde & Schwarz is a registered trademark of Rohde & Schwarz AG.
 For this document all rights reserved.

 ROHDE & SCHWARZ	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR		Sprache: de Lang.: de		Blatt: 12 + Sh.: 12 +		Aei: 08.11 C.I.: 08.11		
	Typ: SMIQ Type: SMIQ		Datum: 99-05-17 Date: 99-05-17		Abteilung: 1GPK Dpt: 1GPK		Name: HO Name: HO		Sachnr.: 1084.9800.01 XY Part No.: 1084.9800.01 XY

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

Für diese Unterlage behalten wir uns alle Rechte vor.
For this document all rights reserved


el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
R1199	B	70	84	2D	8	V20	A	207	142	4A	20	V93	A	71	17	10D	9
R1200	A	69	82	9D	8	V21	A	224	140	6A	20	V94	A	227	113	5D	20
R1201	A	47	108	1E	16	V22	A	229	141	8A	20	V95	A	212	138	6A	20
R1202	A	107	126	5A	5	V23	A	250	48	5E	17	V96	A	230	137	8A	20
R1203	A	78	119	5E	8	V24	A	133	40	10A	3	V97	A	277	140	8C	18
R1204	A	159	109	2E	4	V25	B	201	68	2B	6	V98	B	102	35	5F	3
R1205	A	171	107	2D	4	V25	B	201	68	2B	6	V99	B	238	129	9B	20
R1206	A	171	109	2D	4	V26	A	242	136	10C	20	V100	B	297	75	7E	19
R1207	B	53	139	8E	14	V27	B	15	74	5B	15	V101	A	235	26	3A	17
R1208	A	105	129	5B	5	V28	B	99	130	6B	13	V102	B	248	41	4C	17
R1209	A	89	110	6C	8	V29	B	99	107	6E	13	V103	B	276	80	4B	19
R1210	A	97	121	6E	8	V30	B	16	26	10A	15	V104	B	276	60	6B	19
R1211	A	98	106	6F	8	V31	B	148	130	9A	12	V105	A	292	43	10B	19
R1212	A	93	121	6D	8	V32	B	227	44	5D	12	V105	A	292	43	10D	19
R1213	B	52	137	8D	14	V33	A	254	142	9A	20	V106	B	44	79	6B	16
R1214	A	169	105	1D	4	V34	B	227	77	10D	20	V107	B	43	84	7B	16
R1215	A	295	127	7F	19	V35	B	242	142	10A	20	V108	B	259	109	2C	18
R1216	A	289	127	7F	19	V36	B	287	129	10D	18	V109	A	51	82	8A	16
R1217	B	275	33	6E	19	V37	A	283	134	8C	18	V109	A	51	82	8C	16
R1218	B	276	25	6E	19	V38	A	247	22	3C	17	V110	B	274	109	3C	18
R1219				8B	11	V39	A	232	24	3B	17	V111	B	192	135	3B	20
R1220				5D	19	V40	A	243	26	4B	17	V112	A	71	38	4B	11
R1221				5D	19	V41	A	252	62	6C	17	V113	A	226	25	3A	17
R1222				7D	19	V42	A	247	61	6B	17	V114	A	61	142	10A	10
R1223				7D	19	V43	A	277	22	8D	19	V115	A	236	136	10C	20
R1224				7E	19	V44	A	17	53	9D	11	V116	A	247	136	10C	20
R1225				3E	8	V45	B	244	105	11C	17	V117	A	248	43	5E	17
R1226				7D	19	V46	B	286	34	8C	19	V118	B	213	137	5B	20
R1250				3E	8	V47	B	286	24	9C	19	V119	A	36	115	6E	14
R1251				1E	8	V48	B	205	135	5B	20	V120	A	196	89	7C	5
R1252				8E	8	V49	B	107	131	5B	13	V121	A	289	63	5E	19
R1253				10E	8	V50	B	42	118	4B	14	V122	B	128	133	3B	13
R1300				5C	19	V51	B	107	108	5D	13	V123	B	128	134	3B	13
R1301				3C	19	V52	B	37	118	5B	14	V124	B	119	135	3B	13
S1	B	291	113	4C	18	V53	B	16	133	10B	14	V125	B	119	132	3B	13
S2	B	250	118	2E	18	V54	B	51	58	2A	16	V126	B	128	110	3E	13
T1	B	296	50	10A	19	V55	B	170	128	7A	12	V127	B	128	112	3E	13
U1	A	149	85	7B	21	V56	A	244	55	7B	17	V128	B	119	109	3E	13
U1	A	149	85	9A	21	V57	B	265	139	9C	20	V129	B	119	113	3E	13
U2	A	114	81	1E	9	V58	A	169	97	6D	5	V130	B	179	132	2B	20
U2	A	114	81	2B	9	V59	A	185	48	3B	21	V131	B	300	72	7E	19
U3	A	114	53	2C	9	V60	A	282	120	7E	19	V132	A	243	65	6A	17
U3	A	114	53	2E	9	V61	B	168	117	5A	12	V133	B	297	69	7D	19
U4	B	49	120	11C	13	V62	B	268	136	9C	20	V134	A	22	106	3E	15
U5	B	19	25	11C	15	V63	B	185	119	4A	12	V135	B	297	92	5D	19
U6	B	223	21	2B	12	V64	A	246	142	9B	20	V136	A	19	110	3D	15
U7	A	220	61	5E	3	V65	B	51	22	10C	7	V137	B	48	27	10A	7
U7	A	220	61	9A	3	V66	B	39	25	10E	7	V138	B	51	32	10B	7
U7	A	220	61	9A	3	V67	A	59	18	3A	11	V139	B	38	18	10E	7
U8	A	223	43	6E	3	V68	B	196	89	4B	5	V140	A	242	35	3E	17
U8	A	223	43	9B	3	V69	A	230	59	5E	12	V141	B	44	19	10C	7
U8	A	223	43	9C	3	V70	A	193	137	3C	20	V142	A	276	28	9D	19
U9	B	260	140	6E	18	V71	B	17	137	9B	14	V143	B	287	99	3D	19
U11	B	91	133	7B	13	V72	B	232	118	5D	20	V144	B	276	101	2B	19
U12	B	91	110	7E	13	V73	B	260	92	5E	22	V145	B	201	130	4C	20
V1	B	295	62	7D	19	V74	B	207	143	5A	20	V146	B	223	115	5E	20
V2	B	297	85	5D	19	V75	B	110	135	5B	13	V147	B	228	138	7B	20
V3	B	248	73	8C	17	V76	A	17	121	10E	14	V148	B	277	132	8D	18
V4	B	248	79	8C	17	V77	B	110	112	5E	13	V149	A	255	133	9A	20
V5	A	229	95	10D	12	V78	A	26	121	5D	14	V150	B	50	39	10B	7
V6	B	293	101	2D	19	V79	A	19	117	10E	14	V151	B	283	30	9C	19
V7	B	282	84	4C	19	V80	B	42	51	2B	16	V152	B	39	27	10A	7
V8	B	248	67	7C	17	V81	B	171	108	5B	12	V153	B	289	91	5D	19
V9	B	254	37	3C	17	V82	B	189	109	4B	12	V154	B	217	140	6B	20
V10	B	283	65	6C	19	V83	B	161	122	6B	12	V155	A	259	53	2B	22
V11	A	238	65	7B	17	V84	B	29	87	9A	11	V156	B	25	35	8C	15
V12	A	22	38	9D	15	V85	B	238	36	5E	17	V157	B	28	44	7C	15
V13	A	27	17	9E	15	V86	B	244	127	7A	20	V158	A	28	110	2D	15
V14	A	80	24	10B	9	V87	B	197	142	3A	20	V159	A	12	107	2F	15
V15	A	74	17	10D	9	V88	A	201	139	4A	20	V160	A	204	74	9D	3
V16	A	238	69	7A	17	V89	B	15	76	5A	15	V160	A	204	74	9E	3
V17	A	238	72	7A	17	V90	A	24	34	9C	15	V161	A	255	117	6A	18
V18	B	273	105	1B	19	V91	A	28	31	9E	15	V162	A	255	121	6B	18
V19	A	222	117	5D	20	V92	A	80	28	10A	9	V163	A	240	121	6B	18

	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR			Sprache: de Lang.:		Blatt: Sh.: 13 + Sh.:		Aei: C.I.: 08.11 C.I.:	
	Typ: SMIQ Type:	Datum: 99-05-17 Date:	Abteilung: 1GPK Dpt:	Name: HO Name:		Sachnr.: 1084.9800.01 XY Part No.:			

Nicht-Service-Relevante Bauteile / Non-Service-Relevant Components

el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg	el. Kennz. Part	Seite Side	X	Y	Planq. Sqr	Bl. Pg
V164	A	243	115	6A	18	V185	A	85	96	10A	8	X247	B	259	20	2C	17
V165	A	230	126	9B	20	V186	A	63	92	10B	8	X248	B	276	15	1E	21
V166	A	241	107	10B	17	V187	A	64	66	8B	8	X249	B	293	20	11A	19
V167	A	99	134	6A	5	V188	A	76	96	10D	8	Z1	B	47	104	2E	16
V168	B	62	85	2B	8	V189	A	76	70	8D	8	Z2	B	60	62	2E	16
V168	B	62	85	3B	8	V190	A	70	97	10E	8	Z3	B	52	104	2D	16
V169	B	80	78	2D	8	V191	A	71	70	8E	8	Z4	B	131	35	11C	10
V169	B	80	78	3D	8	V192	B	83	70	2A	8	Z5	B	54	72	10B	16
V170	B	267	109	3C	18	V193	B	83	96	3A	8	Z6	B	126	29	2B	3
V171	B	280	108	3C	18	V194				7D	19	Z7	B	146	29	2C	3
V172	B	71	74	2E	8	V195				5C	19	Z8	B	141	29	2C	3
V172	B	71	74	3E	8	X1	B	81	141	5B	8	Z9	B	151	29	2D	3
V173	A	78	86	8B	8	X2	B	83	117	11B	8	Z10	B	116	29	2D	3
V173	A	78	86	9B	8	X3	B	243	133	10B	20	Z11	B	121	29	2A	3
V174	A	69	80	8C	8	X4	B	142	140	10A	12	Z12	B	136	29	2B	3
V174	A	69	80	9C	8	X5	B	149	106	10B	12	Z13	B	184	29	2A	21
V175	A	84	77	9D	8	X6	B	133	79	11A	21	Z14	B	179	29	2B	21
V175	A	84	77	9D	8	X7	B	29	95	11B	11	Z15	B	194	29	2C	21
V176	A	66	87	8E	8	X8	B	232	97	10D	12	Z16	B	174	29	2D	21
V176	A	66	87	9E	8	X9	B	259	97	6E	22	Z17	B	169	29	2C	21
V177	B	78	84	2A	8	X10	B	85	136	5C	8	Z18	B	189	29	2E	21
V177	B	78	84	3A	8	X11	B	85	110	11C	8	Z19	B	110	29	11B	5
V178	B	63	73	2B	8	X240	B	189	13	1C	21	Z20	B	105	29	11C	5
V179	B	65	95	3B	8	X241	B	17	13	11B	15	Z21	B	199	29	11D	5
V180	B	74	71	2C	8	X242	B	27	13	11C	15	Z22	B	91	24	11D	5
V181	B	74	96	3C	8	X243	B	36	13	10D	11	Z23	B	91	17	11E	5
V182	B	69	70	2D	8	X244	B	44	13	1A	7	Z24	B	95	35	11A	10
V183	B	70	94	3D	8	X245	B	62	13	1C	7						
V184	A	85	66	8A	8	X246	B	245	15	1B	12						

For this document all rights reserved

	Benennung: EE IQ-MODULATOR Designation: IQ-MODULATOR			Sprache: Lang.: de	Blatt: Sh.: 14 -	Aei: C.I.: 08.11
	Typ: Type: SMIQ	Datum: Date: 99-05-17	Abteilung: Dpt: 1GPK	Name: Name: HO	Sachnr.: Part No.: 1084.9800.01 XY	