

NEW: Outstanding  
MER dynamic range



DVB  
Digital Video  
Broadcasting



## TV Test Receiver EFA, Models 40/43 (DVB-T)

Comprehensive analysis/demodulation/monitoring of digital terrestrial TV signals

- ◆ All DVB-T modes supported according to ETS300744
- ◆ High-end demodulator
- ◆ High-end test receiver
- ◆ Standard test receiver
- ◆ Areas of application: production, single frequency network installation and adjustment, monitoring, coverage, research and development, service
- ◆ Comprehensive measurement and monitoring functions
- ◆ Simple, user-friendly operation
- ◆ Modular design – easy retrofitting of options
- ◆ IEC/IEEE bus and RS-232-C interface
- ◆ MPEG2 decoder option



**ROHDE & SCHWARZ**

# EFA – the test reference for terrestrial digital TV

After the successful launch of the first European DVB-T network (Digital Video Broadcasting – Terrestrial) in Great Britain involving over 1 000 000 subscribers (as of December 2000), DVB-T is gaining ground in Europe at an ever faster pace. In this context, the new DVB-T models of the EFA family of test receivers meet the demand for high-precision reception measurements. Compact in design and featuring comprehensive automatic test functionality, the instrument is ideal for R&D, modulator production testing and in-service monitoring of TV signals.

## Standard test receiver (model 40)

- ◆ Selective receiver
- ◆ Typical use in the field where adjacent channels need to be filtered
- ◆ High-end synthesizer with low phase noise
- ◆ Excellent price/performance ratio

## High-end demodulator (model 43)

- ◆ Wideband input (non-selective receiver), tunable
- ◆ Typically used for transmitter testing
- ◆ Outstanding SNR, excellent intermodulation characteristics
- ◆ High-end synthesizer with extremely low phase noise

## High-end test receiver (model 43 + option EFA-B3)

- ◆ Outstanding SNR and improved intermodulation characteristics
- ◆ Rejection of image frequency and IF
- ◆ Two additional selective RF inputs (50  $\Omega$  and 75  $\Omega$ )
- ◆ Extended frequency range from 4.5 MHz to 1000 MHz



## Models and options for DVB-T

			Standard test receivers			High-end demodulators			High-end test receivers			Slots needed
		Models ↗	40	12	78	43	33	89	43	33	89	
Option	Designation	Order No.	DVB-T	B/G	D/K or I	DVB-T	B/G	D/K or I	DVB-T	B/G	D/K or I	
EFA-B2	NICAM Demod./Decod. Std B/G or D/K	2067.3610.02	–	○	○	–	○ <sup>2)</sup>	○ <sup>2)</sup>	–	–	–	1
EFA-B2	NICAM Demod./Decod. Std I	2067.3610.04	–	–	○	–	–	○ <sup>2)</sup>	–	–	–	1
EFA-B3	RF Preselection	2067.3627.02	–	–	–	○	○ <sup>2)</sup>	○ <sup>2)</sup>	◆	◆	◆	1
EFA-B4	MPEG2 Decoder	2067.3633.02	○	○ <sup>1)</sup>	○ <sup>1)</sup>	○	○ <sup>1)2)</sup>	○ <sup>1)2)</sup>	○	–	–	1
EFA-B6	Video Distributor	2067.3656.02	–	–	–	○ <sup>3)</sup>	○	○	○ <sup>3)</sup>	○	○	0
EFA-B7	Switchable Video Bandwidth	2067.3710.02	–	○	–	–	○	–	–	○	–	1
EFA-B8	RPC Measurement	2067.3727.02	–	○	○	–	○	○	–	○	○	0
EFA-B10	OFDM Demodulator	2067.3740.02	✓	○	○	✓	○	○	✓	○	○	1
EFA-B11	6 MHz SAW Filter	2067.3691.00	○	○ <sup>1)</sup>	○ <sup>1)</sup>	○	○ <sup>1)</sup>	○ <sup>1)</sup>	○	○ <sup>1)</sup>	○ <sup>1)</sup>	0
EFA-B12	7 MHz SAW Filter	2067.3591.00	○	○ <sup>1)</sup>	○ <sup>1)</sup>	○	○ <sup>1)</sup>	○ <sup>1)</sup>	○	○ <sup>1)</sup>	○ <sup>1)</sup>	0
EFA-B13	8 MHz SAW Filter	2067.3579.02	○	○ <sup>1)</sup>	○ <sup>1)</sup>	○	○ <sup>1)</sup>	○ <sup>1)</sup>	○	○ <sup>1)</sup>	○ <sup>1)</sup>	0
ZZT-314	Transportation Bag for 3 HU high units	1001.0523.00	○	○	○	○	○	○	○	○	○	0

Each basic unit has three free slots to take up options.

✓ Included in basic unit    ◆ Must be ordered with basic unit    ○ Available    – Not applicable

<sup>1)</sup> Can be retrofitted if option EFA-B10 is built in.

<sup>2)</sup> EFA-B2 or EFA-B3 or EFA-B4: only one choice possible.

<sup>3)</sup> Can be retrofitted if option EFA-B4 is built in.

### Common to all models

- ◆ In-depth measurement capabilities
- ◆ Simple, user-friendly operation
- ◆ Modular design – easy retrofitting of options
- ◆ General measurement functions for
  - RF input level
  - carrier frequency offset
  - bit rate offset
  - BER (before Viterbi, before and after Reed-Solomon)
- ◆ MPEG2 transport stream output (serial or parallel)
- ◆ Alarm messages for measurement functions, internal storage
- ◆ IEC/IEEE bus and RS-232-C interface

### MPEG2 decoder (option EFA-B4)

- ◆ Realtime analysis to ETR 290
- ◆ Error report
- ◆ Video and audio output

### Video distributor (option EFA-B6)<sup>1)</sup>

- ◆ Provides four video outputs (two on front and two on rear panel)

### 6 MHz SAW filter (option EFA-B11)

- ◆ Adjacent-channel rejection
- ◆ Meets US requirements

### 7 MHz SAW filter (option EFA-B12)

- ◆ Designed to DVB-T standards
- ◆ Adjacent-channel rejection
- ◆ Meets European and Australian standards

### 8 MHz SAW filter (option EFA-B13)

- ◆ Designed to DVB-T standards
- ◆ Adjacent-channel rejection
- ◆ Meets European standards

### Analog and digital functions in one instrument

EFA models 40/43 belong to the EFA family. Using the OFDM demodulator option (EFA-B10), even analog EFA TV test receivers (models 12 and 78) and demodulators (models 33 and 89) can be upgraded to dual-mode versions: analog and digital in one unit.

<sup>1)</sup> only possible with model EFA 43 and if option EFA-B4 (MPEG2 decoder) is fitted

# Fully compatible to ETS300744

## Characteristics

DVB-T Test Receiver EFA, fully compatible with the ETS300 744 standard, receives, demodulates, decodes and analyzes OFDM (orthogonal frequency division multiplex) signals. All key parameters for demodulating the receive signal can be selected automatically or manually:

- ◆ 6 MHz, 7 MHz or 8 MHz operating bandwidth
- ◆ 2K or 8K OFDM modulation
- ◆ QPSK, 16QAM or 64QAM constellation diagram
- ◆ 1/2, 2/3, 3/4, 5/6 or 7/8 code rate
- ◆ 1/4, 1/8, 1/16 or 1/32 guard interval
- ◆  $\alpha=1, 2$  or 4 hierarchical demodulation
- ◆ Reed-Solomon error correction 204/188
- ◆ 6 MHz, 7 MHz or 8 MHz SAW filter bandwidth (selectable)

The operating principle of the receiver is basically the same as that of the other receivers from the EFA family, except for certain functions specified in standards.

## Realtime signal analysis

EFA's powerful digital signal processing provides fast and thorough analysis of the received DVB-T signal. Analysis is performed simultaneously with, but independently of, demodulation and decoding. The MPEG2 transport stream is permanently available for decoding as well as for vision and sound reproduction.

Thanks to its realtime analysis capability, the high number of measured values necessary for the complex calculation and display processes are made available for subsequent mathematical/statistical processing in an extremely short, as yet unequalled, time. Because of its high-

speed data acquisition, Test Receiver EFA is the ideal choice not only in R&D but also in production environments where short measurement cycles are essential.

## Features (see figures page 6 to 9)

EFA-T, even the basic version, features a wide range of innovative measurement functions, allowing comprehensive, in-depth signal analysis. As well as measuring general parameters (Fig. 1) such as bit error ratio (BER), more thorough analysis includes:

- ◆ I/Q constellation diagrams (Fig. 2): the number of symbols to be displayed is user-selectable, range: 1 to 999 999 symbols

- ◆ Calculation of I/Q parameters: amplitude imbalance, quadrature offset and carrier suppression, phase jitter, SNR and MER (modulation error ratio) (Fig. 3)
- ◆ Frequency domain displays, e.g. MER(f), I|Q(f) or interferer (Figs 4, 5 and 6)
- ◆ Amplitude, phase and group-delay/frequency response displays (Fig. 7)
- ◆ Amplitude spectrum, including automatic shoulder attenuation measurement to ETR290 (Fig. 8)
- ◆ Long-term monitoring of dedicated parameters through the history function (Fig. 9), monitoring time is selectable from 60 seconds to 1000 days
- ◆ Linearity analysis from amplitude distribution histogram or CCDF (Figs 10 and 11)
- ◆ Received impulse response within the guard interval – including zoom function (Fig. 12)




## DVB-T: OFDM modulation for terrestrial broadcasting of digital TV signals

The DVB-T standard employs OFDM (orthogonal frequency division multiplex) modulation. This modulation is applied to the downconverter module (selective or non-selective, depending on the model) which converts the signal to a 36 MHz IF. It can then be filtered by different SAW filters (depending on the occupied bandwidth), and Gaussian noise can be internally added for margin measurements.

The IF signal is converted to the baseband using a numeric control oscillator. A Fast Fourier Transform (2k or 8k) translates the signal from the time domain to the frequency domain. Then, channel estimation is used to correct the signal's amplitude, phase and delay (continuous and discrete pilots are used for this task) to eliminate most of the degradation introduced during RF transmission.

Data packets are then applied to the Viterbi convolutional decoder, data de-interleaver (outer de-interleaver), Reed-Solomon decoder and data de-randomizer (energy dispersal). Finally, the MPEG2 interface feeds the demodulated MPEG2 transport stream to the hardware output interface (TS SPI or TS ASI). (see Fig. below).

Block diagram of TV Test Receiver EFA, models 40/43 (DVB-T)

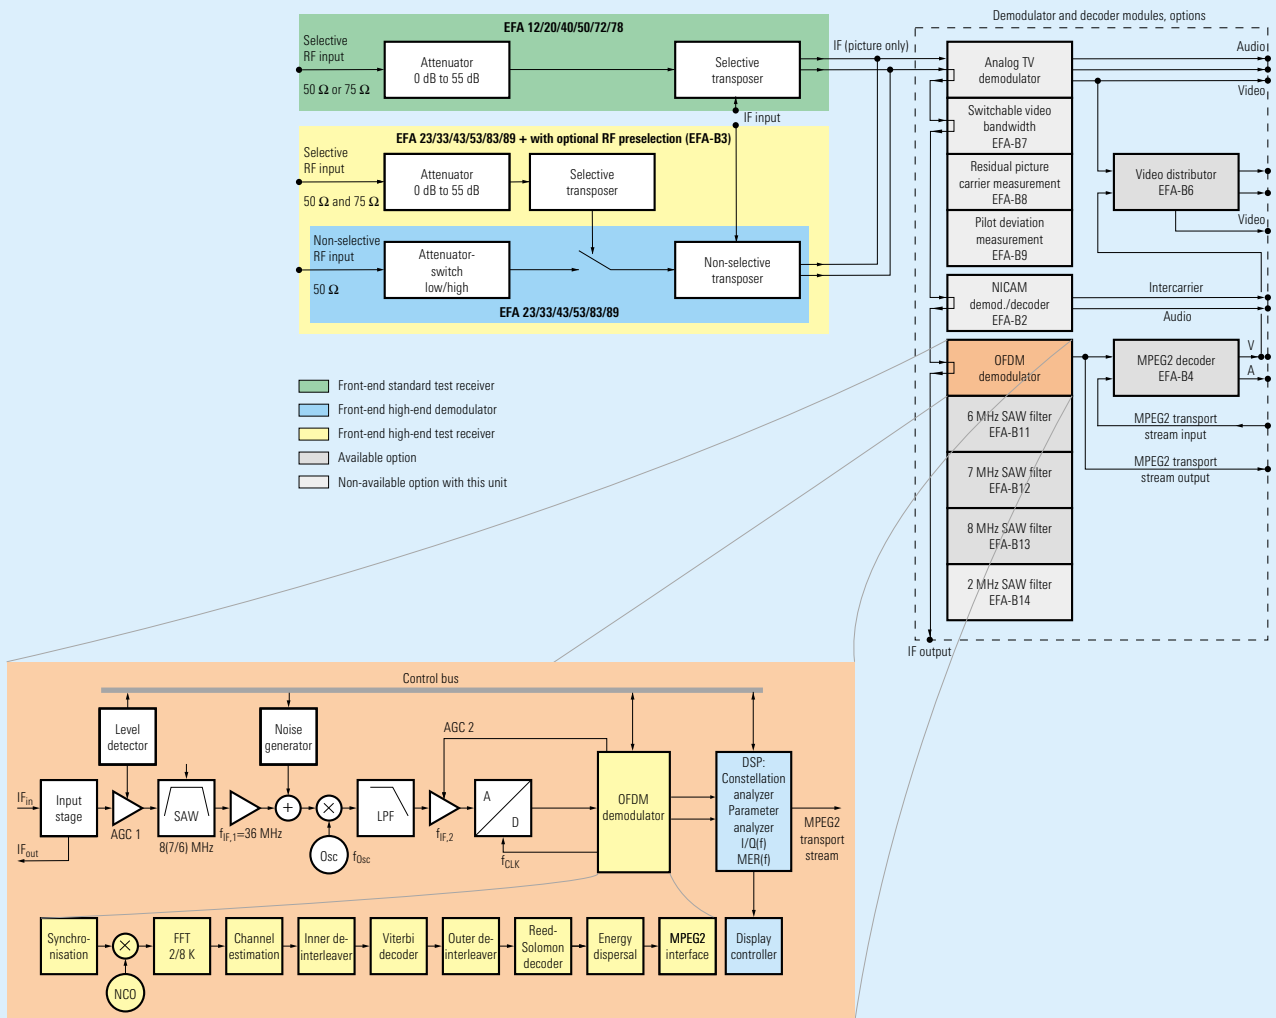


DVB-T MEASURE		
SET RF (8MHz) <b>474.00 MHz</b>	ATTEN : HIGH <b>-35.7 dBm</b>	
<b>FREQUENCY/BER:</b>		CONSTELL DIAGRAM...
FREQUENCY OFFSET -0.123 kHz		FREQUENCY DOMAIN...
BITRATE OFFSET -14.2 ppm		SPECTRUM/ TIME DOMAIN.
BER BEFORE VIT 0.0E-10 (1K50/10K0)		OFDM PARA- METERS...
BER BEFORE RS 0.0E-10 (1K38/10K0)		RESET BER
BER AFTER RS 0.0E-9 (1K42/10K0)		ADD. NOISE OFF
<b>OFDM/CODE RATE:</b>		
FFT MODE 8K (TPS: 8K)		
GUARD INTERVAL 1/32 (TPS: 1/32)		
ORDER OF QAM 64 (TPS: 64)		
ALPHA 1 NH (TPS: 1 NH)		
CODE RATE 7/8 (TPS: 7/8)		
TPS RESERVED 1234 (HEX)		
TS BIT RATE 31.66844 MBit/s I/Q INTERCHANGED		

**Fig. 1: Main measurement menu**

All parameters for the demodulated DVB-T channel are displayed on a single screen and can be checked at a glance:

- the three BERs (bit error ratio) – before Viterbi decoder, before and after Reed-Solomon decoder – give a fast quality overview of the demodulated signal
- the frequency offset of the central carrier
- whether the transmitted TPS pilots are correct (compared with the internal demodulator settings)

**Hint:** The internal noise generator can be activated to perform END (equivalent noise degradation) measurements or noise margin measurements which are based on the BER measurement.

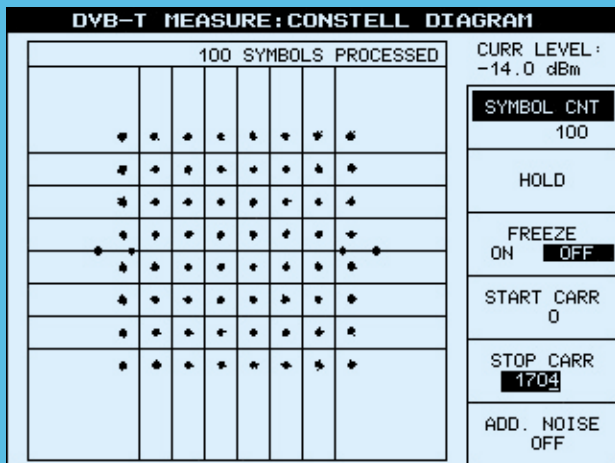

**Fig. 2: Constellation diagram**

The constellation diagram is always the best way to represent digital modulation. It is also the best visual tool for interpreting measurement results, for example from carrier suppression or I/Q amplitude imbalance measurements. For in-depth analysis, adjustment of the displayed number of symbols is possible (100 symbols are shown in this example). If required, the EFA can set the number automatically to obtain an optimal refresh rate.

DVB-T MEASURE: OFDM PARAMETERS		
SET RF (8MHz) <b>474.00 MHz</b>	ATTEN : HIGH <b>-35.7 dBm</b>	
<b>PARAMETERS: CENTR CARR ONLY</b>		CONSTELL DIAGRAM...
<b>MODULATOR:</b>		FREQUENCY DOMAIN...
I/Q AMPL IMBALANCE	-0.13 %	SPECTRUM/ TIME DOMAIN.
I/Q QUADRATURE ERROR	-0.04 °	START CARR
CARRIER SUPPRESSION	35.1 dB	STOP CARR
PHASE	+47 °	ADD. NOISE OFF
<b>TRANSMISSION:</b>		
PHASE JITTER (RMS)	0.21 °	
SIGNAL/NOISE RATIO	38.9 dB	
<b>SUMMARY:</b>		
MOD ERR RATIO (RMS)	31.0 dB	
MOD ERR RATIO (MIN)	23.3 dB	
MOD ERR RATIO (RMS)	2.8 %	
MOD ERR RATIO (MAX)	6.8 %	
<b>AVERAGE: 100 %</b>		

**Fig. 3: OFDM parameters**


All OFDM parameters are calculated from the constellation diagram for the selected carriers. It is then very easy to measure for example the suppression of the RF central carrier of a modulator in 2K mode (carrier 852 – discrete pilot) even in 8K mode (carrier 3408 – continuous pilot).



**Fig. 4: MER as a function of frequency**

MER as a function of the frequency is one of the most powerful measurements that the EFA can perform. It displays the MER for every QAM modulated carrier of the OFDM signal. At a glance, you can measure the overall quality of the transmitter under test.


With 'START CARR' and 'STOP CARR', you can quickly locate any impaired QAM carrier in the OFDM signal. Co-channel interference can also be measured and displayed when an interference measurement is performed (interference-to-carrier measurement).

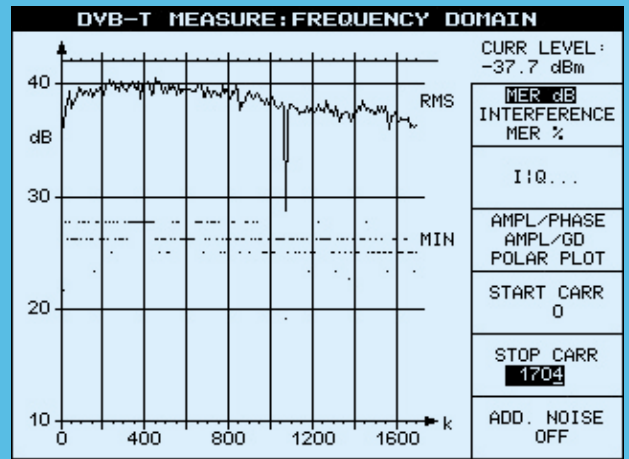

**Fig. 5: I/Q versus frequency**

This diagram shows symbols versus frequency. In other words, the quadrature (Q) and the in-phase (I + 90°) information of the constellation diagram are displayed for a complete symbol.


A glance at the constellation diagram immediately shows any errors or degradations.

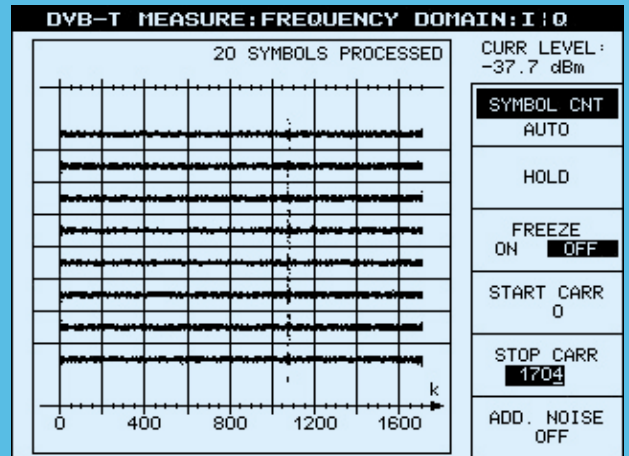


**Fig. 6: I/Q versus frequency (zoom)**

Effects of interest can be located more precisely by varying the number of symbols and carriers that are displayed. Any impairment (carrier 1076 is clearly marked on display) can then be localized quickly and easily.

The same method can be used for all frequency domain measurements – for example MER versus frequency or the polar plot.

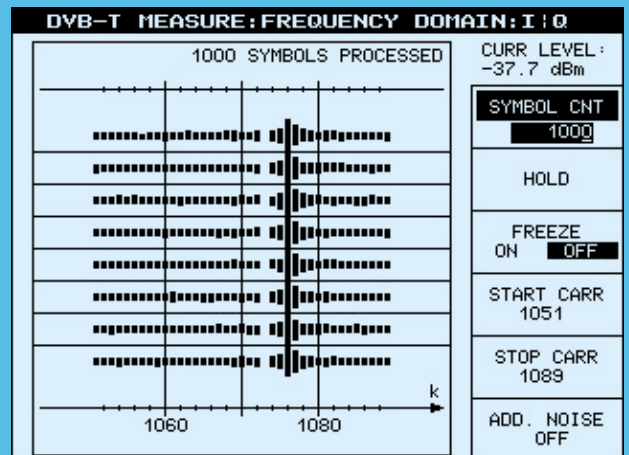


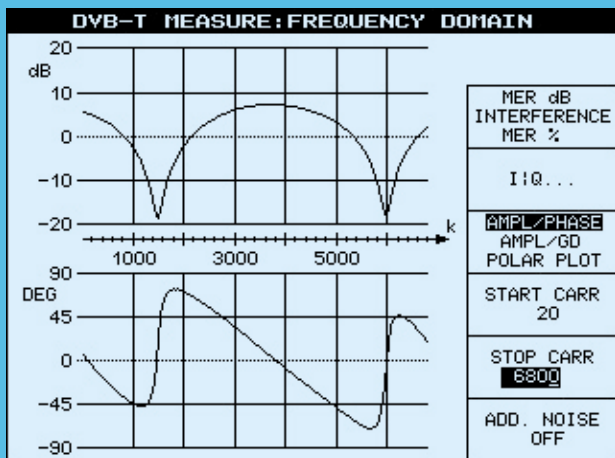

**Fig. 7: Channel estimation**

In the OFDM demodulation chain, channel estimation compensates for frequency, phase and delay degradations that have been introduced during DVB-T transmission. It is then easy for the EFA to output the amplitude response, the phase response and the group delay, displaying the channel estimation coefficients versus frequency.


The polar plot may also help to interpret very fast echoes (difficult to visualize with impulse response measurements).

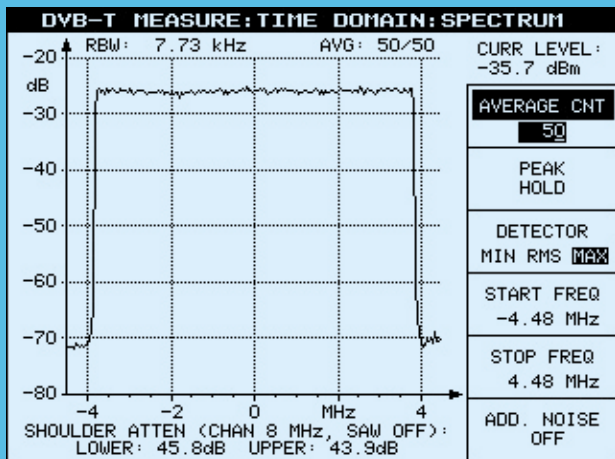

**Fig. 8: Spectrum analysis**

Thanks to this integrated feature, you will not need a separate spectrum analyzer anymore. All basic spectrum analyzer functions are provided, for example start/stop frequency (or center/span) as are several detection and averaging modes.

The automatic shoulder attenuation measurement (strictly meets ETR 290), makes checking the performance of any DVB-T transmitter child's play.

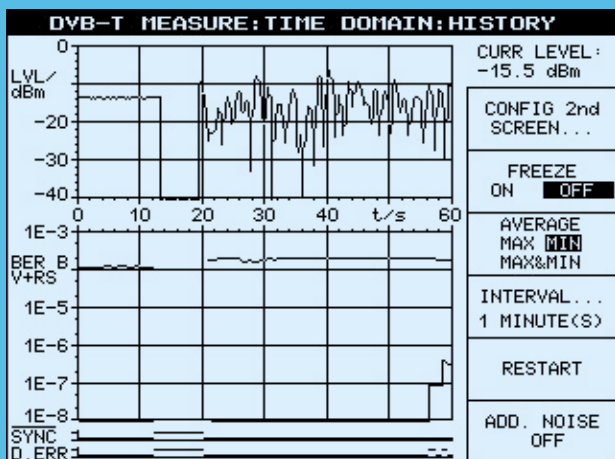

**Fig. 9: History function**

This measurement is just what is required for long-term DVB-T transmitter monitoring. Most key parameters (level, MER/dB, MER/%, BER and synchronization information) are, therefore, displayed in graphical form. This mode can also display all values numerically (average, max, min, current). BER and level measurements run continuously and are independent of other measurements.


**Hint:** Results are easy to read from a remote location.



**Fig 10: Amplitude distribution function**

The measurement function for displaying the amplitude distribution or the CCDF (complementary cumulative distribution function) is used to detect nonlinear distortions. The frequency distribution of the DVB-T signal is divided into several 1 dB windows to determine the amplitude distribution. Information on the crest factor is obtained from the frequency distribution and displayed in the upper right-hand corner of the graph.


The reference values are marked by short horizontal lines.

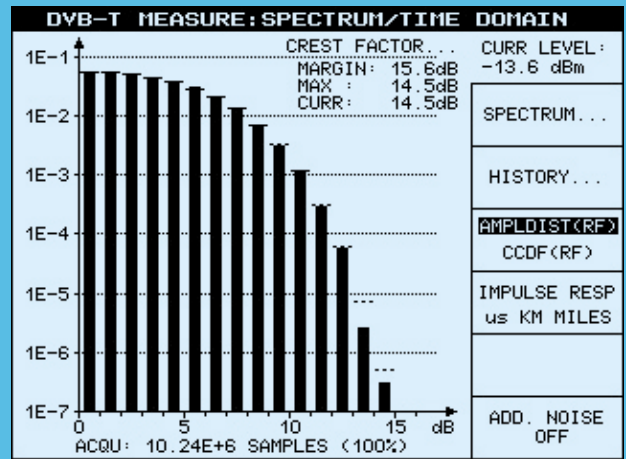

**Fig 11: Complementary cumulative distribution function (CCDF)**

In contrast to the amplitude distribution, each trace point indicates how often a certain voltage level is attained or exceeded.


The ideal frequencies are displayed as short, horizontal lines at 1 dB intervals (reference values) so that the amplitude distribution of the applied signal can be compared with that of an ideal DVB-T signal. Any deviation from the ideal distribution is then identified by the deviations of the column heights and the value of the crest factor, for example due to clipping in the transmitter output stage.

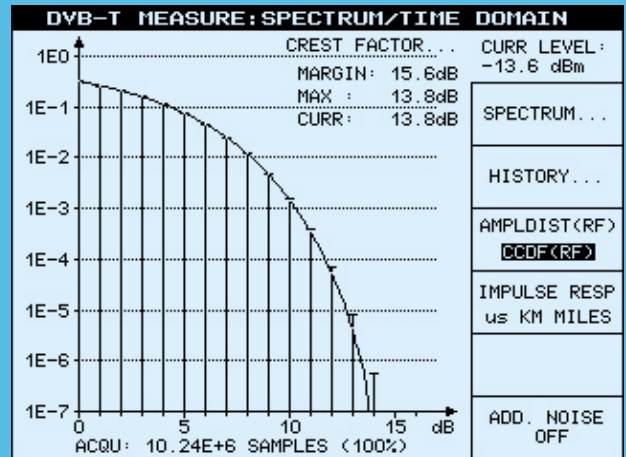

**Fig 12: Impulse response**

The impulse response measurement (within the guard interval) is very useful. Especially so for single frequency network (SFN) adjustment. The measurement lets you visualize and measure (numeric values) the main DVB-T signal (0 dB, reference), echoes and pre-echoes. The zoom function lets you visualize fast echoes that may occur in urban areas (reflections from buildings).

To suit the application, the X axis unit and scale can be changed, for example from µs to km or even miles.

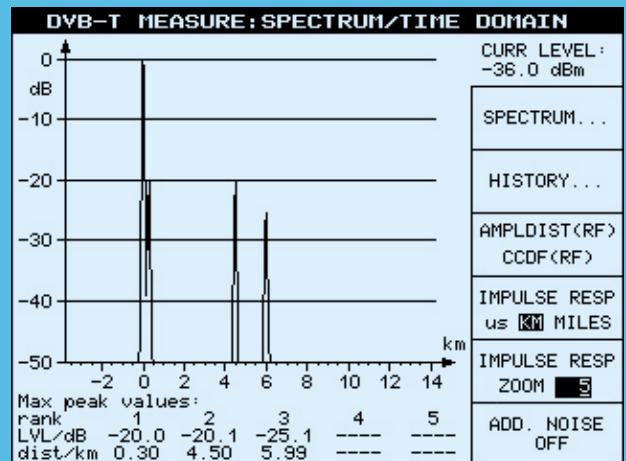

# Typical applications

## Production testing on modulators and transmitters (calibration and test)

EFA's analysis capabilities make it possible to pinpoint problems such as interferers and inadequate carrier suppression: the constellation diagram shows the symbols, but only if a single carrier is affected – the difficulty is localization. This is exactly what the I/Q measurement function does: symbols are displayed as a function of carriers (frequency domain) to locate the problem in the spectrum display. Once the interferer is localized, the constellation display can be used for further evaluation. This approach can also be used with the MER-vs-frequency measurement function.



## Transmitter installation and adjustment of single frequency networks (SFN)

The time domain analysis extends EFA's range of applications to SFN installation and adjustment – an area where spectrum and impulse-response analysis are very useful. The impulse response function makes it possible to visualize the delay between two transmitters at a reception point. This measurement function can be used to optimize the delay between the transmitters. The zoom function makes it possible to see fast echoes, for example direct reflections from a building, mountain etc.

## Coverage measurements on terrestrial signals (see photo above)

To allow measurements to be performed under even the worst reception conditions, a single keystroke will optimize the OFDM demodulator for mobile reception (where a lot of impairments affect transmission quality) or stationary reception. The algorithms for speed and channel equalization are optimized, as is internal level control.

## Monitoring TV transmitters and transposers

EFA is the perfect solution for DVB-T signal monitoring. An alarm is triggered if one of the selected parameters exceeds the threshold that has been set. The incident level, OFDM synchronization, MER (modulation error ratio), BER (before Viterbi and before Reed-Solomon decoders) and the MPEG2 transport stream output can be checked in realtime independent of other measurements and decoding. If an error occurs, a 1000-row register is available to record the date, time and designation of the event. The MPEG2 decoder option EFA-B4 extends monitoring capabilities. Realtime measurements to test specifications for DVB systems (ETR290 – priorities 1, 2 and 3) can be performed and make the EFA a complete DVB-T monitoring system.

! most important measurement    ✓ required measurement

The table below summarizes the measurements required for the various DVB-T applications

DVB-T OFDM application	Level	BER	MER	SNR	Carrier suppression	Quadrature error	Amplitude imbalance	Phase jitter	Constellation diagram	MER(f)	I/Q(f)	Spectrum-shoulder attenuation	Amplitude(f)/phase(f)/group	Amplitude distribution CCDF	Impulse response	History
Production of modulators and transmitters	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	!		✓
Transmitter installation and SFN adjustments	✓	✓	✓						✓	✓	✓	✓			!	✓
Coverage measurement of terrestrial signals	✓	!	✓						✓			✓			✓	✓
Monitoring of TV transmitters and transposers	✓	✓	✓						✓					✓	✓	!
Research & Development	✓	✓	✓	✓	✓	✓	✓	✓	✓	!	✓	✓	✓	✓	✓	✓
Service	✓	✓	✓	✓	✓	✓	✓	✓	!	✓	✓	✓	✓	✓		✓

# DVB-T MEASURE: CONSTELL DIAGRAM

100 SYMBOLS PROCESSED

CURR LEV  
-14.0 dB

SYMBOL

HOLD

FREEZE  
ON

START



## Specifications

Realtime measurement functions to test specifications for DVB systems (ETR290)


### Model-specific characteristics

	DVB-T standard test receiver (model 40)	DVB-T high-end test receiver (model 43) with option EFA-B3	DVB-T high-end demodulator (model 43)
RF input	selective	selective	non-selective
Connector	50 $\Omega$ or 75 $\Omega$ , BNC or N female, front or rear panel (see configuration sheet)	50 $\Omega$ , N female, rear panel and 75 $\Omega$ , BNC female, rear panel	50 $\Omega$ , N female, rear panel
Return loss	$\geq 14$ dB in channel with 50 $\Omega$ connector and input attenuation $\geq 10$ dB $\geq 12$ dB in channel with 75 $\Omega$ connector and input attenuation $\geq 10$ dB	$\geq 17$ dB ( $>20$ dB typ.) in channel with 50 $\Omega$ connector $\geq 14$ dB ( $>17$ dB typ.) in channel with 75 $\Omega$ connector	$\geq 30$ dB
Frequency range	48 MHz to 862 MHz	4.5 MHz to 1000 MHz <sup>1)</sup>	45 MHz to 1000 MHz
Level range (lower values: QPSK only <sup>1)2)</sup> )	-72 dBm to +20 dBm (with LOW NOISE, preamplifier = OFF) -82 dBm to -47 dBm (with LOW NOISE, preamplifier = ON) -88 dBm to -47 dBm (with LOW NOISE, preamplifier = ON and HIGH ADJ CHAN POWER = ON)	-85 dBm to +14 dBm (low noise) -80 dBm to +20 dBm (normal) -80 dBm to +20 dBm (low distortion) -90 dBm to -10 dBm (low noise and HIGH ADJ CHAN POWER = ON)	-50 dBm to +20 dBm
Noise figure (50 $\Omega$ input, RF $\geq 47.15$ MHz)	12 dB typ. (low noise) 7 dB typ. (preamplifier and low noise)	7 dB typ. (low noise) 9 dB typ. (normal) 11 dB typ. (low distortion)	
Image frequency rejection	$\geq 70$ dB (VHF) and $\geq 50$ dB (UHF)	100 dB	
IF rejection		100 dB	
Local oscillator			
Resolution	1 Hz	1 Hz	1 Hz
Frequency error	$\leq 2 \times 10^{-6}$	$\leq 2 \times 10^{-6}$	$\leq 2 \times 10^{-6}$
OFDM demodulator characteristics			
Inherent MER <sup>2)</sup>	$\geq 38$ dB	$\geq 40$ dB	$\geq 40$ dB
Inherent SNR <sup>2)</sup>	$\geq 39$ dB	$\geq 41$ dB	$\geq 41$ dB

<sup>1)</sup> At low input frequencies such as 4.57 MHz: additional tilt (0.7 dB pp typ.), minimum input level: -30 dBm, SAW filter ON.

<sup>2)</sup> Valid for instruments delivered as of January 2001.

### RF Preselection for demodulator – option EFA-B3

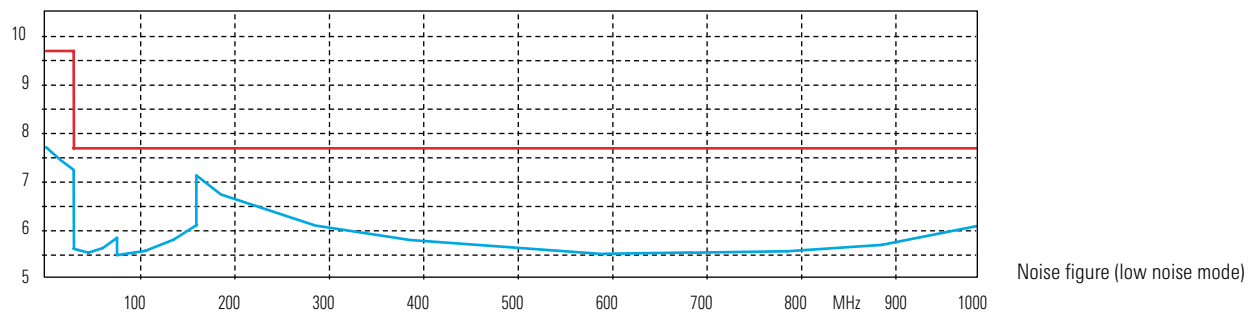

### Common characteristics

IF input	50 $\Omega$ , BNC female, rear panel, 36 MHz
Return loss in channel	$\geq 30$ dB
Level range	-30 dBm to -5 dBm
IF output	50 $\Omega$ , BNC female, rear panel, 36 MHz
Return loss in channel	$\geq 20$ dB
Level, regulated	-17 dBm

<b>OFDM characteristics</b>	
Bandwidth operation	6 MHz, 7 MHz and 8 MHz switchable
SAW filters	6 MHz, 7 MHz, 8 MHz or OFF
Bit rate clock inaccuracy	<10 ppm (< 3 ppm typ.)
FFT mode	2K or 8K carriers
Constellation	QPSK, 16QAM, 64QAM
Guard interval	1/4, 1/8, 1/16, 1/32
Code rate	1/2, 2/3, 3/4, 5/6, 7/8
Hierarchical modulation	OFF, $\alpha=1$ , $\alpha=2$ , $\alpha=4$
Equivalent noise degradation (END) at 64QAM; R 2/3	≤1.5 dB
Channel correction	self-adapting
I/Q inversion	automatic, with indication
BER processing	before Viterbi decoder, before and after Reed-Solomon decoder
Measurements	level, frequency offset, bit rate offset / BER (bit error ratio) before Viterbi decoder, before and after Reed-Solomon decoder / MER (modulation error ratio) in dB and % / SNR (signal-to-noise ratio), carrier suppression (2K and 8K) / quadrature error, amplitude imbalance / phase jitter / shoulder attenuation (upper/lower) to ETR290 / crest factor
Graphic displays	constellation diagram, start/stop frequencies and number of symbols selectable / MER(f) in dB: RMS and max. values, start/stop frequencies selectable / MER(f) in %: RMS and min. values, start/stop frequencies selectable / Interference(f) in dB: RMS and max. values, start/stop frequencies selectable / I/Q(f), start/stop frequencies and number of symbols selectable / frequency spectrum, start/stop frequencies selectable / amplitude(f), start/stop frequencies selectable / phase(f), start/stop frequencies selectable / group delay(f), start/stop frequencies selectable / polar plot, start/stop frequencies selectable / amplitude distribution(RF) / CCDF(RF) / impulse response(t) with zoom (max. zoom = 20) / history for level (all level units available), MER (dB and %), BER before Viterbi, BER before Reed-Solomon decoder, all measurements: MAX and MIN and AVERAGE and MAXMIN detectors running in parallel
Protection ratio for DVB-T interfered with by analog TV in the lower adjacent channel (n-1), 64QAM, R 2/3, 8 MHz, QEF, LOW DISTORTION and HIGH ADJ CHAN POWER = ON (valid for instruments delivered as of January 2001)	44 dB typ.
Protection ratio for DVB-T interfered with by analog TV in the upper adjacent channel (n+1), 64QAM, R 2/3, 8 MHz, QEF, LOW DISTORTION and HIGH ADJ CHAN POWER = ON (valid for instruments delivered as of January 2001)	42 dB typ.
MPEG2 TS parallel output	synchronous LVDS (188 byte, 204 byte, TS-SPI), 100 $\Omega$
MPEG2 TS ASI output	asynchronous serial MPEG2 transport stream (TS-ASI); 75 $\Omega$
SER DATA output	serial data stream ahead of Viterbi decoder; 75 $\Omega$
SER CLOCK output	clock output for SER DATA; 75 $\Omega$
Alarm messages	level, synchronization, BER before Viterbi, BER before and after Reed-Solomon, data transmission error
Storage	with date and time, up to 1000 lines
Memory for instrument setup storage	0 to 4

<b>Test parameters</b>	<b>Range</b>	<b>Resolution</b>
Level	depending on model, see above	0.1 dB
MER (modulation error ratio) in dB	depending on mode of QAM	0.1 dB
MER (modulation error ratio) in %	depending on mode of QAM	0.1%
SNR (signal-to-noise ratio)	depending on mode of QAM	0.1 dB
Carrier suppression (2K and 8K)	-5 dB to +30 dB	0.1 dB
I/Q amplitude imbalance	±5%	0.01%
I/Q quadrature error	±5°	0.01°
Frequency offset	±300 kHz	1 Hz
Bit rate offset	±40 ppm	0.1 ppm
BER before Viterbi	$1.0 \times 10^{-2}$ to $0.1 \times 10^{-15}$	$0.1 \times 10^{-\text{exponent}}$
BER before Reed-Solomon	$1.0 \times 10^{-3}$ to $0.1 \times 10^{-15}$	$0.1 \times 10^{-\text{exponent}}$
BER after Reed-Solomon	$1.0 \times 10^{-4}$ to $0.1 \times 10^{-14}$	$0.1 \times 10^{-\text{exponent}}$
Crest factor	0.0 dB to 15.0 dB	0.1 dB
Echo values (max. = 5 echoes)	0.0 dB to -40.0 dB, -62.2 $\mu$ s to +236.4 $\mu$ s (8K FFT, 8 MHz channel bandwidth)	0.1 dB, 10 ns

### MPEG2 decoder – option EFA-B4

Realtime measurement functions: simultaneous monitoring of all signals in transport stream

Realtime measurement functions according to test specifications for DVB systems (ETR290): priorities 1, 2 and 3

Signal format	
Transport stream	to ISO/IEC 1-13818
Data rate of transport stream	up to 54 Mbit/s
Length of data packets	188/204 bytes, automatic switchover
Signal input	
Internal: from DVB demodulator External: asynchronous serial MPEG2 transport stream, 270 Mbit/s (TS ASI)	BNC connector on rear panel, 200 mV pp to 1 V pp, 75 $\Omega$
Video signal output	
CCVS (PAL, SECAM, NTSC)	BNC connector on rear panel, 1 V pp $\pm$ 1%, 75 $\Omega$
Video serial digital (ITU-R 601), 270 Mbit/s	BNC connector on rear panel, 800 mV pp, 75 $\Omega$
Audio	
Connectors	Lemo Triax female, paired; on front panel: unbalanced, on rear panel: balanced, floating
Impedance	<25 $\Omega$
Signals	mono, left/right, sound 1/ sound 2
Level (full scale)	+6 dBm $\pm$ 0.2 dB into 600 $\Omega$
Frequency response (40 Hz to 15 kHz)	$\pm$ 0.5 dB relative to 1 kHz
S/N ratio	>70 dB, unweighted
THD	>70 dB

### Video distributor – option EFA-B6

Video output	2 x BNC female on front panel; 2 x BNC female on rear panel
Impedance	75 $\Omega$
Return loss (0 Hz to 6 MHz)	$\geq$ 26 dB
Level inaccuracy	$\leq$ 2%
DC offset of video signal, MPEG2 decoder mode, black level	0 V
Decoupling of outputs (level variation at terminated output when switching the other outputs between short circuit and open circuit)	$\leq$ 1%

### 6 MHz SAW filter – option EFA-B11

Ripple in band	0.4 dB pp
Rejection of adjacent channels	>50 dB ( $>\pm$ 3.8 MHz) >85 dB ( $>\pm$ 5.3 MHz) with high adj. channel power ON

### 7 MHz SAW filter – option EFA-B12

Ripple in band	0.7 dB pp
Rejection of adjacent channels	>55 dB ( $>\pm$ 4.0 MHz) >90 dB ( $>\pm$ 5.3 MHz) with high adj. channel power ON

### 8 MHz SAW filter – option EFA-B13

Ripple in band	0.8 dB pp
Rejection of adjacent channels	>55 dB ( $>\pm$ 4.4 MHz) >90 dB ( $>\pm$ 5.3 MHz) with high adj. channel power ON



## General data

Display	monochrome LCD (320 x 240), backlit
Interfaces	IEC625-2/IEEE488 bus, RS-232-C, printer (Centronics)
Temperature range	to IEC68-2-1/-2
Rated temperature range	+5°C to +45°C
Operating temperature range	0°C to +50°C
Power supply	100 V to 120 V/220 V to 240 V +10%/-15% (autoranging), 50 Hz to 60 Hz
Power consumption	EFA 40: 70 W EFA 43: 75 W EFA 43 + EFA-B3: 90 W
Dimensions (W x H x D)	435 mm x 147 mm x 460 mm
Weight	approx. 12 kg, depending on options

## Ordering information

<b>DVB-T Test Receiver *</b> Selective, constellation diagram, output MPEG2 data stream	EFA 40	2067.3004.40
<b>DVB-T Test Demodulator *</b> Broadband, constellation diagram, output MPEG2 data stream	EFA 43	2067.3004.43

## Options

RF Preselection for demodulator	EFA-B3	2067.3627.02
MPEG2 Decoder	EFA-B4	2067.3633.02
Video Distributor	EFA-B6	2067.3656.02
OFDM Demodulator (for analog units)	EFA-B10	2067.3740.02
6 MHz SAW Filter	EFA-B11	2067.3691.00
7 MHz SAW Filter	EFA-B12	2067.3591.00
8 MHz SAW Filter	EFA-B13	2067.3579.02

## Recommended extras

EFA Calibration Values	EFA-DCV	2082.0490.09
19" Adapter	ZZA-93	0396.4892.00
Lemo Triax connector (mono) with connecting cable (open)		2067.7451.00
Service manual		2068.0950.24
Transportation Bag for 3 HU high units	ZZT-314	1001.0523.00

\*) Note: please fill in configuration sheet (available from your local representative or from Rohde&Schwarz WEB site, EFA section) so that your test receiver/demodulator can be tailored to your requirements.

## Further EFA family members ...

... see EFA main data sheet (PD 0757.2421), including:

EFA models 20/23 (DVB-C), EFA models 12/33 (analog standard B/G), EFA models 78/89 (analog standard D/K or I), EFA models 72/83 (analog standard M/N)



Fax Reply (TV Test Receiver EFA, Models 40/43 (DVB-T))

- Please send me an offer**
- I would like a demo**
- Please call me**
- I would like to receive your free-of-charge CD-ROM catalogs**

Others: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Name: \_\_\_\_\_  
Company/Department: \_\_\_\_\_  
Position: \_\_\_\_\_  
Address: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
Country: \_\_\_\_\_  
Telephone: \_\_\_\_\_  
Fax: \_\_\_\_\_  
E-mail: \_\_\_\_\_





ATSC/8VSB

ITU-T J.83/B

M/N  
NTSC/BTSC

## Test Receiver R&S EFA ATSC/8VSB – ITU-T J.83/B – M/N Analog TV

Comprehensive analysis/demodulation/monitoring of digital and analog TV signals

- ◆ Standard test receiver
- ◆ High-end test receiver
- ◆ High-end demodulator
- ◆ Multistandard digital and analog platform for terrestrial and CATV applications
- ◆ Application areas: production, monitoring, coverage, service, research and development
- ◆ Comprehensive measurement and monitoring functions
- ◆ Modular design — easy retrofitting of options
- ◆ SDTV MPEG2 analyzer/decoder option
- ◆ IEC/IEEE-bus and RS-232-C interface
- ◆ Simple, user-friendly operation



**ROHDE & SCHWARZ**

# The EFA Family

The TV Test Receiver and Demodulator Family EFA offers outstanding performance features and excellent transmission characteristics. The instruments provide high-precision reception and demodulation of vestigial sideband AM signals (analog TV signals) as well as of digitally modulated TV signals. They measure a comprehensive range of transmission parameters and are therefore ideal for measurement and monitoring applications in cable networks, TV transmitter stations and development labs.

## The complete EFA family at a glance

### Standard test receivers

- ◆ Model 50: digital TV, ATSC/8VSB
- ◆ Model 70: digital TV, ITU-T J.83/B
- ◆ Model 90: analog TV, standard M/N

### High-end test receivers

- ◆ Model 53 incl. option EFA-B3: digital TV, ATSC/8VSB
- ◆ Model 73 incl. option EFA-B3: digital TV, ITU-T J.83/B
- ◆ Model 93 incl. option EFA-B3: analog TV, standard M/N

### High-end demodulators

- ◆ Model 53: digital TV, ATSC/8VSB
- ◆ Model 73: digital TV, ITU-T J.83/B
- ◆ Model 93: analog TV, standard M/N

### Standard test receiver

- ◆ Model 40: digital TV, DVB-T

### High-end test receiver

- ◆ Model 43 incl. option EFA-B3: digital TV, DVB-T

### High-end demodulator

- ◆ Model 43: digital TV, DVB-T

Data sheet No.  
PD 0757.5514.xx

### Standard test receivers

- ◆ Model 60: digital TV, DVB-C
- ◆ Model 12: analog TV, standard B/G
- ◆ Model 78: analog TV, standard D/K or I

### High-end test receivers

- ◆ Model 63 incl. option EFA-B3: digital TV, DVB-C
- ◆ Model 33 incl. option EFA-B3: analog TV, standard B/G
- ◆ Model 89 incl. option EFA-B3: analog TV, standard D/K or I

### High-end demodulators

- ◆ Model 63: digital TV, DVB-C
- ◆ Model 33: analog TV, standard B/G
- ◆ Model 89: analog TV, standard D/K or I

Data sheet No.  
PD 0757.2421.xx



## Wide variety of models

The TV Test Receiver Family EFA from Rohde & Schwarz is a versatile and high-performance TV test receiver and demodulator platform, which can be optimally configured for any application, whether digital or analog.

Three frontends are available:

- standard selective,
- high-end selective and
- high-end non-selective.

The high-end models have an even better signal-to-noise ratio than the standard models and offer excellent intermodulation characteristics. This, coupled with minimum inherent frequency response, guarantees extremely accurate measurements.

The approach described in the following will help you find the right EFA model for your application:

- ◆ If the application mainly concerns measurements in cable networks or on terrestrial signals, a receiver model that selects the channel to be measured is the appropriate choice. Adjacent-channel signals, which impair measurement results, are filtered out by high suppression. Then, a choice has to be made between the standard selective and the high-end selective version. As with the other criteria, this choice depends on the application.
- ◆ Measurements on modulators or TV transmitters, where only one TV signal is involved, are performed with one of the demodulator models with the high-end non-selective frontend, which guarantees extremely low measurement uncertainty without preselection.

- ◆ The last selection criterion is the TV demodulator used, and whether it is analog and/or digital

The EFA test receivers can be configured for digital signals and for the analog TV standard M/N (option EFA-B30).

Operation involving a mix of analog and digital channels is becoming more widespread. In addition to the analog models, the digital demodulator option offers complete digital measurement functionality:

- For terrestrial applications, this task is performed by the digital


ATSC/8VSB demodulator  
(options EFA-B20 + EFA-K22)

- In cable networks, this is handled by the QAM demodulator option for the

ITU-T J.83/B standard  
(options EFA-B20 + EFA-K23) or  
DVB-C standard  
(options EFA-B20 + EFA-K21)

- For baseband analysis, the SDTV MPEG2 analyzer/decoder (option EFA-B4) rounds off the EFA product line.

## EFA model selection concept

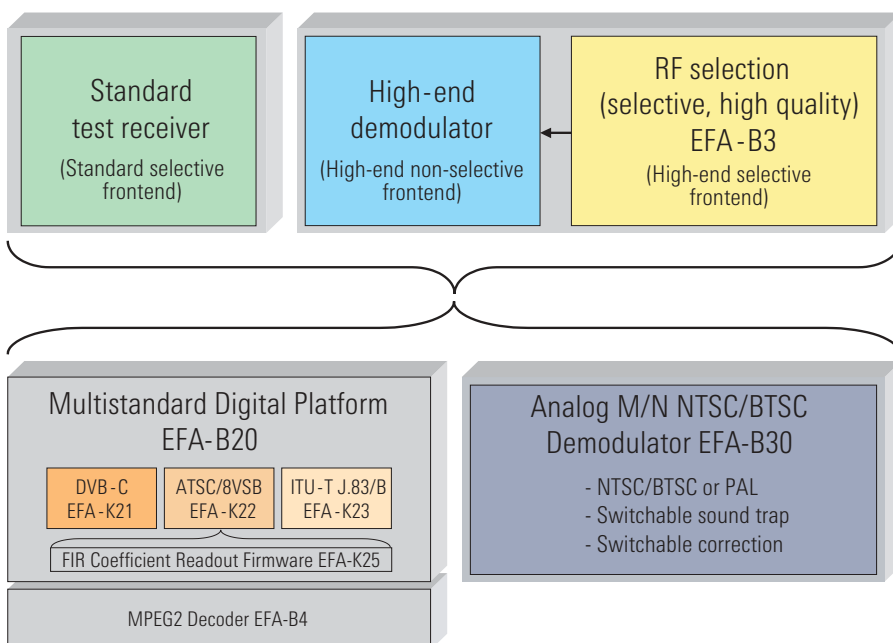

# The EFA Family

## EFA — realtime signal analysis

EFA's powerful digital signal processing provides fast and thorough analysis of the received digitally modulated TV signal. Analysis is performed simultaneously with, but independently of, demodulation and decoding. The MPEG2 transport stream is permanently available for decoding as well as for video and audio reproduction.

Due to its realtime analysis capability, the high number of measured values necessary for the complex calculation and display processes are made available for subsequent mathematical/statistical processing in an extremely short and as yet unequalled time. Because of its high-speed data acquisition, the TV Test Receiver EFA is the ideal choice not only for R&D but also for production environments where short measurement cycles are essential.

## Standard test receiver (EFA models 50/70/90)

- ◆ Selective receiver
- ◆ Typical use in the field where adjacent channels need to be filtered
- ◆ High-end synthesizer with low phase noise
- ◆ Excellent price/performance ratio

## High-end demodulator (EFA models 53/73/93)

- ◆ Wideband input (non-selective receiver), tunable
- ◆ Typically used for transmitter testing
- ◆ Outstanding SNR, excellent intermodulation characteristics
- ◆ High-end synthesizer with extremely low phase noise

## High-end test receiver (EFA models 53/73/93 + option EFA-B3)

- ◆ Outstanding SNR and improved intermodulation characteristics
- ◆ Rejection of image frequency and IF
- ◆ Two additional selective RF inputs (50  $\Omega$  and 75  $\Omega$ )
- ◆ Extended frequency range from 4.5 MHz to 1000 MHz

Block diagram of TV Test Receiver EFA

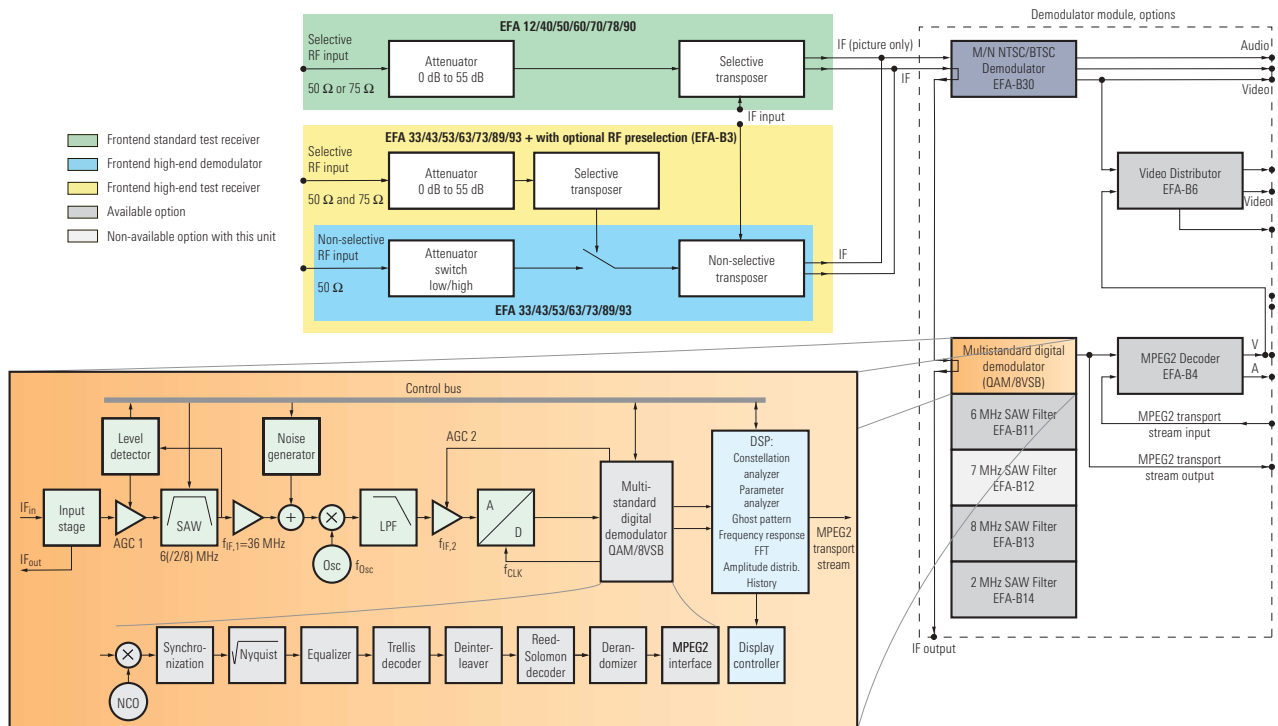




Table of available EFA models & options

Option	Designation	Models	Standard test receivers				High-end demodulators				High-end test receivers				Slot needed
			50	60	70	90	53	63	73	93	53	63	73	93	
		Order No.	8VSB	DVB-C	J.83/B	M/N	8VSB	DVB-C	J.83/B	M/N	8VSB	DVB-C	J.83/B	M/N	
EFA-B3	RF Preselection	2067.3627.02	–	–	–	–	○	○	○	○	◆	◆	◆	◆	1
EFA-B4	MPEG2 Decoder	2067.3633.02	–	○	○	○ <sup>1)</sup>	–	○	○	○ <sup>1)</sup>	–	○	○	○ <sup>1)</sup>	1
EFA-B6	Video Distributor	2067.3656.02	–	–	–	–	○ <sup>3)</sup>	○ <sup>3)</sup>	○ <sup>3)</sup>	○	○ <sup>3)</sup>	○ <sup>3)</sup>	○ <sup>3)</sup>	○	0
EFA-B11	6 MHz SAW Filter	2067.3691.00	○	○	○	○	○	○	○	○	○	○	○	○	0
EFA-B13	8 MHz SAW Filter	2067.3579.03	○	○	○	○	○	○	○	○	○	○	○	○	0
EFA-B14	2 MHz SAW Filter	2067.2562.00	○	○	○	○	○	○	○	○	○	○	○	○	0
EFA-B20	Digital Demodulator Platform	2067.3585.02	✓	✓	✓	○ <sup>2)</sup>	✓	✓	✓	○ <sup>2)</sup>	✓	✓	✓	○ <sup>2)</sup>	1
EFA-B30	M/N NTSC/BTSC Demodulator	2067.3556.02	○	○	○	✓	○	○	○	✓	○	○	○	✓	1
EFA-K21	DVB-C / J.83/A/C (QAM) Firmware	2067.4000.02	○	✓	○	○	○	✓	○	○	○	✓	○	○	0
EFA-K22	ATSC/8VSB Firmware	2067.4017.02	✓	○	○	○	✓	○	○	○	✓	○	○	○	0
EFA-K23	J.83/B Firmware	2067.4023.02	○	○	✓	○	○	○	✓	○	○	✓	○	○	0
EFA-K25	FIR Coefficient Readout Firmware	2067.4046.02	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	○ <sup>4)</sup>	0
ZZT-314	Carrying Bag for 19" units, 3 HU	1001.0523.00	○	○	○	○	○	○	○	○	○	○	○	○	0

Each basic unit has three free slots to take up options.

- ✓ included in basic unit    ◆ must be ordered with basic unit    ○ available
- <sup>1)</sup> Can be retrofitted if option EFA-B20 is built in.
- <sup>2)</sup> Must be ordered with min. one firmware option (EFA-K21 or EFA-K22 or EFA-K23).
- not applicable
- <sup>3)</sup> Requires EFA-B4 or EFA-B30
- <sup>4)</sup> Requires models EFA.50/53 or option EFA-B20 + EFA-K22

**Common to all models**

- ◆ In-depth measurement capabilities
- ◆ Simple, user-friendly operation
- ◆ Modular design — easy retrofitting of options
- ◆ Alarm messages for measurement functions, internal storage
- ◆ IEC/IEEE-bus and RS-232-C interface

**Digital options**

**Digital Demodulator Platform EFA-B20**

- ◆ Retrofit of analog instruments
- ◆ Multistandard demodulator platform supporting DVB-C demodulation (with EFA-K21), ATSC/8VSB demodulation (with EFA-K22), ITU-T J.83/B demodulation (with EFA-K23)
- ◆ Included in basic EFA 50/53/60/63/70/73 models
- ◆ MPEG2 transport stream output (serial or parallel)
- ◆ General measurement functions for
  - RF input level
  - carrier frequency offset
  - bit rate offset
  - BER (before and after Reed-Solomon)

**MPEG2 Decoder EFA-B4**

- ◆ MPEG2 syntax analysis according to DVB standard
- ◆ SDTV decoding, 625L or 525L supported, SDI output, PAL / SECAM / NTSC video out

**6 MHz SAW Filter EFA-B11**

- ◆ Adjacent-channel rejection
- ◆ Meets US requirements

**8 MHz SAW Filter EFA-B13**

- ◆ Adjacent-channel rejection
- ◆ Meets European and US standards, recommended for spectrum measurements

**2 MHz SAW Filter EFA-B14**

- ◆ Adjacent-channel rejection
- ◆ Meets channel return requirements (in cable applications)

**DVB-C Firmware EFA-K21**

- ◆ Analysis, demodulation and monitoring of DVB-C signals according to ETS 300 429 standard
- ◆ Included in basic EFA 60/63 models

**ATSC/8VSB Firmware EFA-K22**

- ◆ Analysis, demodulation and monitoring of ATSC/8VSB signals according to ATSC Doc. A/53

- ◆ Included in basic EFA 50/53 models
- ◆ Additional SMPTE310M MPEG2 TS output

**ITU-T J.83/B Firmware EFA-K23**

- ◆ Analysis, demodulation and monitoring of American digital cable signals according to ITU-T J.83/B standard
- ◆ Included in basic EFA 70/73 models

**FIR Coefficient Readout Firmware EFA-K25**

- ◆ Calculation of FIR filter coefficients for linear pre-correction of digital signals
- ◆ Only available for the ATSC/8VSB models

**Analog option**

**M/N NTSC/BTSC Demodulator EFA-B30**

- ◆ Meets FCC requirements (group delay correction)
- ◆ Switchable sound trap
- ◆ Switchable group delay correction
- ◆ Switchable synchronous or envelope detector
- ◆ Integrated BTSC/MTS decoder
- ◆ Retrofit of digital instruments

# ATSC/8VSB

## EFA models 50/53 – all measurement functions for ATSC digital TV standard

### EFA 50/53 characteristics

The ATSC/8VSB Test Receiver EFA, fully compatible with the ATSC Doc. A/53 standard, receives, demodulates, decodes and analyzes 8VSB (eight-level vestigial sideband) signals. All key parameters for demodulating the received signal can be automatically or manually selected:

- ◆ 8VSB modulation
- ◆ Trellis decoder (code rate 2/3)
- ◆ Fixed symbol rate for normal use (10.762238 Msymbols/s)
- ◆ Variable symbol rate for special modulator tests and lab analysis (2 Msymbols/s to 11 Msymbols/s)
- ◆ Reed-Solomon error correction 207/187/10
- ◆ Optional SAW filter bandwidths: 6 MHz, 8 MHz and 2 MHz
- ◆ Input of any IF frequency with the aid of the EFA-B3 option: frequency range continuously tunable from 5 MHz to 1000 MHz
- ◆ Special function: invert spectrum feature

### Features

The new test receiver, even the basic version, features a wide range of innovative measurement functions, allowing comprehensive, in-depth signal analysis. In addition to measuring general parameters (Fig. 1) such as bit error ratio (BER), more thorough analysis includes:

- ◆ I/Q constellation diagrams (Fig. 2) with user-selectable number of symbols to be displayed, range: 1 to 999 999 999 symbols
- ◆ Frequency spectrum, including automatic shoulder attenuation measurement to FCC recommendation (Fig. 3),
- ◆ Complex channel transmission function (Fig. 4)
- ◆ Received echo signals (ghost pattern, Fig. 5)
- ◆ Histogram I (Fig. 6) with user-selectable number of symbols to be displayed, range: 1 to 999 999 999 symbols
- ◆ Modulation error ratio (MER), error vector magnitude (EVM), phase jitter and signal-to-noise ratio (Fig. 7)
- ◆ Linearity analysis from amplitude distribution histogram and CCDF referred to the RF signal (Figs 8 and 9)

- ◆ History function: long-term monitoring of transmission parameters (Fig. 10)
- ◆ Alarm monitoring window (Fig. 11) and alarm statistics (Fig. 12)
- ◆ Permanent MPEG2 transport stream demodulation (independent from the selected measurement task)
- ◆ Integrated noise generator

Any failures and degradations are immediately visible in the constellation diagram. Effects of interest can be located more precisely by varying the number of symbols represented. The integrated spectral analysis function enables simple examination of the signal type and its spectrum. One can see immediately, for example, whether there is a marked frequency offset, or if the pilot carrier level matches the specification. An optional filter with 8 MHz channel bandwidth covers spectral components outside the 6 MHz user channel while effectively suppressing more distant components. The shoulder attenuation according to the FCC recommendation can be measured with this optional 8 MHz SAW filter.




ATSC/VSB MEASURE			
CENTER FREQ 90.00 MHz	CHANNEL	ATTEN : 35 dB -5.2 dBm	
<b>MODULATION:</b>		8VSB	
<b>FREQUENCY:</b>		CONSTELL DIAGRAM...	
SET CENTER FREQUENCY	90.000 MHz	FREQUENCY DOMAIN...	
SET PILOT FREQUENCY	87.309 MHz	TIME DOMAIN...	
PILOT FREQ OFFSET	-0.251 kHz	VSB PARA- METERS...	
SET SYMBOL RATE	10.762 MSymb/s	RESET BER	
SYMBOL RATE OFFSET	1.4 ppm	ADD. NOISE OFF	
<b>BER:</b>			
BER BEFORE RS	0.0E-10 (8K80/10K0)		
BER AFTER RS	0.0E-9 (7K22/10K0)		
TS BIT RATE 19.393 MBit/s			

**Fig. 1: Measurement menu**

All parameters for the demodulated ATSC/8VSB channel are displayed on a single screen and can be checked at a glance:


- Level of the input signal
- Two BERs (bit error ratio) — before and after Reed-Solomon decoder — provide a fast quality overview of the demodulated signal
- Pilot frequency offset
- Symbol rate offset

**Hint:** When required, the internal noise generator can be activated to perform END (equivalent noise degradation) or noise margin measurements which are based on the BER measurement.

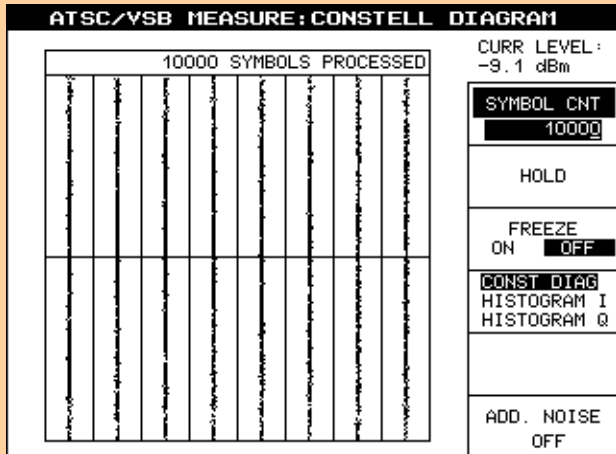

**Fig. 2: Constellation diagram**

The constellation diagram is always the best way to represent digital modulation. It is also the best visual tool for interpreting measurement results such as pilot amplitude error. For in-depth analysis, adjustment of the displayed number of symbols is possible (10 000 symbols are shown in this example).

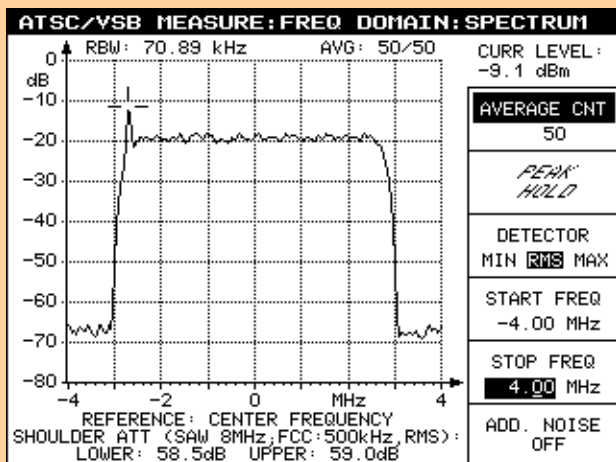

**Fig. 3: Spectrum analysis**

Thanks to this integrated feature, a separate spectrum analyzer is not required anymore.


All basic spectrum analyzer functions are provided: start/stop frequency (or center/span) and several detection and averaging modes.

The automatic shoulder attenuation measurement (strictly compliant to FCC recommendations) makes checking the performance of any ATSC/8VSB transmitter a child's play.

# ATSC/8VSB


**Fig. 4: Amplitude and phase frequency response**

The coefficients of the equalizer are used to display the amplitude and phase frequency response (shown here), the group delay (not shown here) and the polar plot representation. In the 8VSB demodulation chain, the equalizer compensates for frequency, phase and delay degradation that may have been introduced during the 8VSB transmission. It is then easy for the EFA to output the amplitude response, phase response and group delay, displaying the equalizer coefficients over the frequency by means of FFT. The polar plot representation — which is the complex representation of amplitude and phase — may also help to interpret very short echoes (that are difficult to visualize on the ghost pattern).

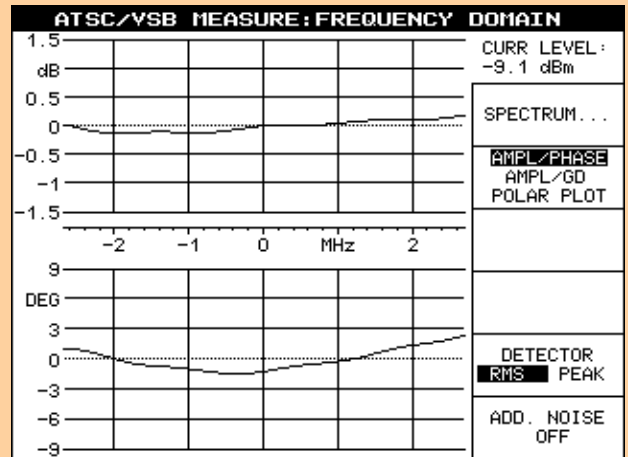


**Fig. 5: Ghost pattern**

The ghost pattern measurement allows the main ATSC/8VSB signal (0 dB relative), echoes and pre-echoes to be visualized and measured (numeric values). The range function allows the visualization of the short echoes that may occur in urban areas (reflections from buildings). The units of the X axis and of the numeric values can be changed from  $\mu$ s to km or even miles, depending on the application.

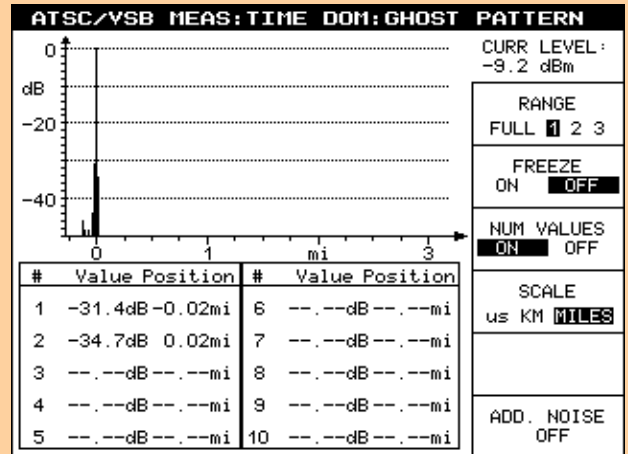

**Fig. 6: Histogram I**

Histogram I represents the distribution of the eight-level vestigial sideband modulation (8VSB) on the X axis, and can be expressed in a linear or logarithmic scale. It allows an estimate of the interferer's origin (interferer, Gaussian noise, etc). **Hint:** Check the position of the sync pulse ( $\pm 5$ ), and check the impact on the distribution.

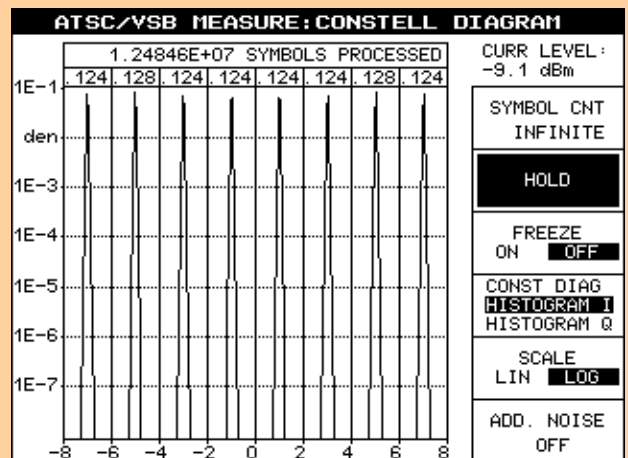

ATSC/VSB MEASURE: VSB PARAMETERS		
CENTER FREQ 751.00 MHz	CHANNEL	ATTEN : LOW+P -1.0 dBm
<b>TRANSMISSION:</b>		CONSTELL DIAGRAM...
PHASE JITTER (RMS)	0.27 °	FREQUENCY DOMAIN...
SIGNAL/NOISE RATIO	48.1 dB	TIME DOMAIN...
<b>SUMMARY:</b>		VSB PARA PILOT VALUE.
MOD ERROR RATIO (RMS)	43.5 dB	
MOD ERROR RATIO (MIN)	26.1 dB	
ERROR VECTOR MAG (RMS)	0.4 %	
ERROR VECTOR MAG (MAX)	3.2 %	
		ADD. NOISE OFF


**Fig. 7: 8VSB modulation parameters**

All 8VSB parameters are calculated from the constellation diagram:

- Phase jitter
- Signal-to-noise ratio
- MER (modulation error ratio), RMS and Min
- EVM (error vector magnitude), RMS and Max...

... and the pilot parameters (not shown here):


- Pilot value
- Data signal to pilot ratio
- Pilot amplitude error

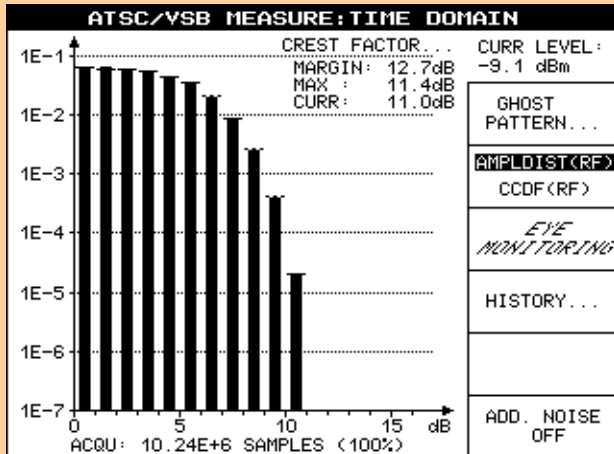

**Fig. 8: Amplitude distribution function**

The measurement function for displaying the amplitude distribution or the CCDF (complementary cumulative distribution function) is used to detect nonlinear distortion.

The frequency distribution of the 8VSB signal is divided into several 1 dB windows to determine the amplitude distribution. Information on the crest factor is obtained from the frequency distribution and displayed in the upper right-hand corner of the graph. The reference values are marked by short horizontal lines.

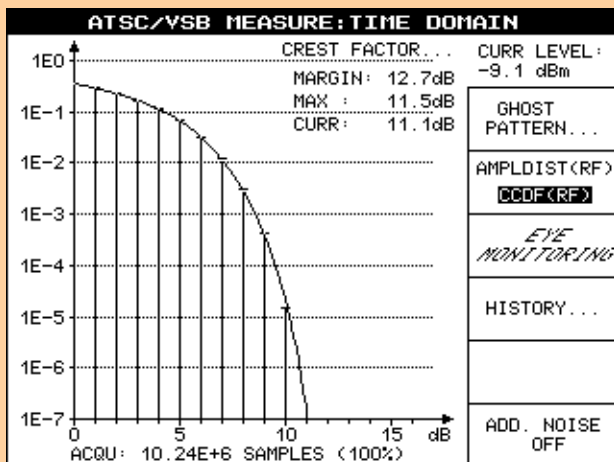

**Fig. 9: Complementary cumulative distribution function (CCDF)**


In contrast to the amplitude distribution, each trace point indicates how often a certain voltage level is attained or exceeded. The ideal frequencies are displayed as short, horizontal lines at 1 dB intervals (reference values) so that the amplitude distribution of the applied signal can be compared with that of an ideal 8VSB signal. Any deviation from the ideal distribution is then identified by the deviations of the column heights and the value of the crest factor, for example due to clipping in the transmitter output stage.

# ATSC/8VSB

**Fig. 10: History function**

This measurement is just what is required for long-term ATSC/8VSB transmitter monitoring and does not require any additional tools.

The key parameters (level, synchronization information, MER/dB, MER/%, EVM/%, BER before and after Reed-Solomon decoder, synchronization and MPEG2 TS data error) are, therefore, displayed in graphical form. This mode can also display all values numerically (average, max, min, current). BER and level measurements run continuously and are independent of other measurements. The user can configure a monitoring interval from 60 seconds (shown here) to 1000 days.

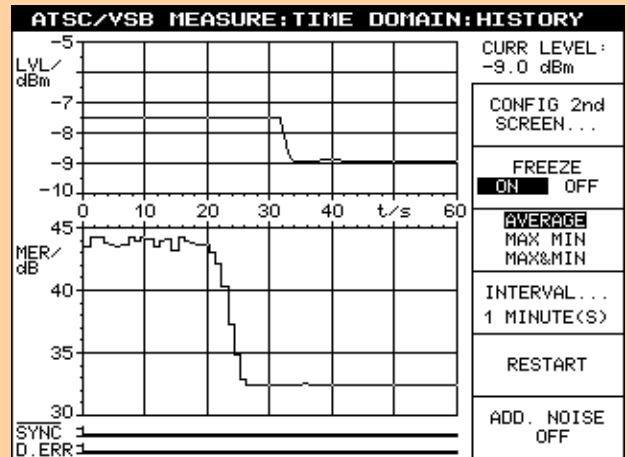

**Fig. 11: Monitoring/Alarm register**

The EFA checks the input level (LV), 8VSB synchronization (SY), modulation error ratio (ME), error vector magnitude (EM), bit error ratio before Reed-Solomon decoder (BR) and MPEG2 data errors (DE) of the 8VSB signal at a rate of once per second.

All alarm messages are stored in the alarm register together with the date and time.

Up to 1000 entries can be stored.

ATSC/VSB ALARM						
CENTER FREQ	CHANNEL	ATTEN	LOW+P			
689.00 MHz	50	-15.1	dBm			
NO	DATE	TIME	ALARM	REGISTER CLEAR...		
	18.04.01	17:01:52	LV SY ME EV BR DE			
999				THRESHOLD...		
0	18.04.01	16:57:58	REGISTER CLEARED			
1	18.04.01	16:57:59	---			
2	18.04.01	17:00:20	LV ---	CONFIG...		
3	18.04.01	17:00:43	LV -- ME EV ---			
4	18.04.01	17:01:04	LV -- ME EV -- DE	LINE		
5	18.04.01	17:01:05	LV -- ME EV ---	NEWEST MAN		
6	18.04.01	17:01:11	LV -- ME EV BR --			
7	18.04.01	17:01:12	LV -- ME EV BR DE	PRINT...		
8	18.04.01	17:01:13	LV -- ME EV BR --			
9	18.04.01	17:01:15	LV SY ME EV BR DE	STATISTICS...		

**Fig. 12: Statistics function**

The alarm messages can be called up at a keystroke (in the alarm menu), providing the user with an overview of downtimes.

ATSC/VSB ALARM: STATISTICS			
CENTER FREQ	CHANNEL	ATTEN	LOW+P
689.00 MHz	50	-16.1	dBm
MONITORING TIME		000000:04:45	
LEVEL	LV = 000000:02:24	50.5263 %	
MPEG TS SYNC	SY = 000000:01:24	29.4737 %	
MOD ERROR RATIO	ME = 000000:01:55	40.3509 %	
ERROR VECTOR MAG	EV = 000000:01:55	40.3509 %	
BER BEFORE RS	BR = 000000:01:28	30.8772 %	
MPEG DATA ERROR	DE = 000000:01:26	30.1754 %	
CORR CNT BEFORE RS		N =	1889155
MPEG DATA ERROR CNT AFTER RS		N =	58738
REFRESH			



## Typical applications

### EFA-ATSC/8VSB for production of modulators and transmitters

The EFA's analysis capabilities permit in-depth testing of the transmitter's performance thanks to the outstanding MER/EVM dynamic range, amplitude distribution measurement and spectrum analysis - integrating the automatic shoulder attenuation measurement according to FCC recommendations.

### Monitoring of ATSC/8VSB transmitters and transposers

The EFA is the perfect solution for monitoring ATSC/8VSB signals. An alarm is triggered if one of the selected parameters exceeds the set threshold (all thresholds can be individually configured): incident level, ATSC/8VSB synchronization, MER (modulation error ratio), EVM (error vector magnitude), BER before Reed-Solomon decoder and MPEG2 TS data error can be checked in realtime inde-

pendently of other measurements and decoding. If an error occurs, a 1000-line register is available for recording the date, time and description of the event.

### EFA ATSC/8VSB as relay receiver

For this special application, the EFA is simply optimized for reception at a key-stroke — adding a special filter in order to remove any analog M/N co-channel interferers. This allows reception even under adverse operating conditions. The user is also able to configure the bandwidths of the main amplitude- and phase-controlled loops.

### EFA as a multistandard digital and analog platform

Since the analog terrestrial standard M/N is still in use, and broadcasters need a future-proof solution for their short- and long-term investment based on an EFA ATSC/8VSB receiver, an analog M/N NTSC/BTSC demodulator can optionally be implemented. It covers all application areas from R&D to field measurements. Furthermore, to protect your investment, the unit can be updated by means of options to demodulate and analyze the ITU-T J.83/B and DVB-C digital cable standards. These unique features make the new EFA family members THE measurement devices for the present and the future.



Summary of measurements required for the various ATSC/8VSB applications

ATSC/8VSB application	Level	BER	MER/EVM	SNR	Pilot parameters	Phase jitter	Constellation diagram	Frequency spectrum - shoulder attenuation	Amplitude (f) - phase (f) - group delay (f)	Amplitude distribution - CCDF	Ghost pattern	History	Alarm	Statistics
Production of modulators and transmitters	✓	✓	✓	✓	✓	✓	✓	✓	✓	!	✓	✓		
Transmitter installation	✓	✓	✓		✓		✓	!	✓			✓		
Coverage measurement of terrestrial signals	✓	!	✓				✓	✓			✓	✓	✓	✓
Monitoring of TV transmitters and transposers	✓	✓	✓		✓		✓			✓	✓	!	✓	✓
Research and development	✓	✓	!	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Service	✓	✓	✓	✓	✓	✓	!	✓	✓	✓		✓	✓	✓

! most important measurement

✓ required measurement

## EFA models 70/73 – all measurement functions for ITU-T J.83/B digital CATV standard

Besides the deployment of the worldwide digital terrestrial TV network and the already established digital video broadcasting over satellite, digital cable TV still represents an alternative for many consumers worldwide. Additionally, cable technology provides a return channel within the same physical layer (coax cable), allowing the consumer to send back information to the cable headend for versatile applications (full Internet access, video-on-demand and more). The boundary between data communications and TV networks has never been so narrow!

### EFA 70/73 characteristics

Fully compatible with the ITU-T J.83/B standard, the EFA 70/73 models receive, demodulate, decode and analyze 64 QAM or 256 QAM (quadrature amplitude modulated) signals. All key parameters for demodulating the received signal can be automatically or manually selected:

- ◆ 64 QAM or 256 QAM modulation
- ◆ Trellis decoder (code rate 14/15 for 64 QAM and 19/20 for 256 QAM)
- ◆ Fixed symbol rate for normal use (5.056941 Msymbols/s for 64 QAM and 5.360537 Msymbols/s for 256 QAM)

- ◆ Variable symbol rate for special modulator tests and lab analysis (1 Msymbols/s to 6999 Msymbols/s)
- ◆ Reed-Solomon error correction 128/122/3
- ◆ Optional SAW filter bandwidth: 6 MHz, 8 MHz and 2 MHz
- ◆ Input of any IF frequency with the aid of the EFA-B3 option: frequency range continuously tunable from 5 MHz to 1000 MHz
- ◆ Special function: invert spectrum feature

### Features

The new test receiver, even the basic version, features a wide range of innovative measurement functions, allowing comprehensive, in-depth signal analysis. In addition to measuring general parameters (Fig. 13) such as bit error ratio (BER), more thorough analysis includes:

- ◆ I/Q constellation diagrams (Fig. 14) with user-selectable number of symbols to be displayed, range: 1 to 999 999 999 symbols
- ◆ I/Q parameters, modulation error ratio (MER), error vector magnitude (EVM), phase jitter and signal-to-noise ratio (Fig. 15)

- ◆ Frequency spectrum (Fig. 16)
- ◆ Complex channel transmission function (Fig. 17)
- ◆ Received echo signals: echo pattern (Fig. 18)
- ◆ Histogram I (Fig. 19) and Q (Fig. 20) with user-selectable number of symbols to be displayed, range: 1 to 999 999 999 symbols
- ◆ Linearity analysis from amplitude distribution histogram and CCDF referred to the RF signal (Figs 21 and 22)
- ◆ History function: long-term monitoring of transmission parameters (Fig. 23)
- ◆ Alarm monitoring window (Fig. 24)

Any failures and degradations are immediately visible from the constellation diagram. Effects of interest can be located more precisely by varying the number of symbols represented. The integrated spectral analysis function enables simple examination of the signal type and its spectrum.

J.83/B MEASURE			
SET RF <b>689.00 MHz</b>	CHANNEL <b>50</b>	ATTEN : LOW+P <b>-9.4 dBm</b>	
<b>MODULATION:</b>		64QAM	
<b>FREQUENCY:</b>		CONSTELL DIAGRAM...	
FREQUENCY OFFSET	0.275 kHz	FREQUENCY DOMAIN...	
SET SYMBOL RATE	5.057 MSymb/s	TIME DOMAIN...	
SYMBOL RATE OFFSET	4.4 ppm	QAM PARAMETERS...	
<b>BER:</b>		RESET BER	
BER BEFORE RS	0.0E-10 (1K02/10K0)	ADD. NOISE OFF	
BER AFTER RS	0.0E-9 (2K44/10K0)		
TS BIT RATE 26.971 MBit/s			

**Fig. 13: Measurement menu**

All parameters for the demodulated ITU-T J.83/B channel are displayed on a single screen and can be checked at a glance:

- Level of the input signal
- Two BERs (bit error ratio) — before and after Reed-Solomon decoder — provide a fast quality overview of the demodulated signal
- Demodulated symbol rate
- Symbol rate offset

**Hint:** When required, the internal noise generator can be activated to perform END (equivalent noise degradation) or noise margin measurements which are based on the BER measurement.

J.83/B MEASURE: CONSTELL DIAGRAM	
10000 SYMBOLS PROCESSED	CURR LEVEL : -9.1 dBm
	SYMBOL CNT 10000
	HOLD
	FREEZE ON OFF
	CONST DIAG HISTOGRAM I HISTOGRAM Q
	ADD. NOISE OFF

**Fig. 14: Constellation diagram**

The constellation diagram is always the best way to represent digital modulation. It is also the best visual tool for interpreting measurement results like I/Q amplitude imbalance or carrier suppression. For in-depth analysis, adjustment of the displayed number of symbols is possible (10 000 symbols are shown in this example).

J.83/B MEASURE: QAM PARAMETERS			
SET RF <b>213.00 MHz</b>	CHANNEL <b>13</b>	ATTEN : 25 dB <b>-17.6 dBm</b>	
<b>MODULATION:</b>		CONSTELL DIAGRAM...	
I/Q AMPL IMBALANCE	0.11 %	FREQUENCY DOMAIN...	
I/Q QUADRATURE ERROR	0.04 °	TIME DOMAIN...	
CARRIER SUPPRESSION	55.9 dB	QAM PARAMETERS...	
<b>TRANSMISSION:</b>		RESET BER	
PHASE JITTER (RMS)	0.10 °	ADD. NOISE OFF	
SIGNAL/NOISE RATIO	45.65 dB		
<b>SUMMARY:</b>			
MER (RMS)	44.23 dB		
MER (MIN)	31.07 dB		
EVM (RMS)	< 0.4 %		
EVM (MAX)	1.72 %		

**Fig. 15: QAM modulation parameters**


All QAM parameters are calculated from the constellation diagram:

- I/Q amplitude imbalance
- I/Q phase error
- Carrier suppression
- Phase jitter
- Signal-to-noise ratio
- MER (modulation error ratio), RMS and Min
- EVM (error vector magnitude), RMS and Max

# ITU-T J.83/B


**Fig. 16: Spectrum analysis**

Thanks to this integrated feature, a separate spectrum analyzer is not required anymore. All basic spectrum analyzer functions are provided: start/stop frequency (or center/span) and several detection and averaging modes.

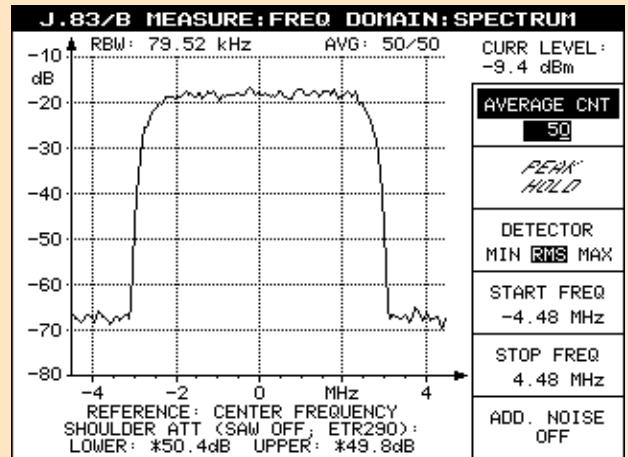


**Fig. 17: Amplitude and phase frequency response**


The coefficients of the equalizer are used to display the amplitude and phase frequency response (shown here), the group delay (not shown here) and the polar plot representation. In the ITU-T J.83/B demodulation chain, the equalizer compensates for frequency, phase and delay degradation that may have been introduced during the QAM transmission. It is then easy for the EFA to output the amplitude response, phase response and group delay, displaying the equalizer coefficients over the frequency by means of FFT. The polar plot representation — which is the complex representation of amplitude and phase — may also help to interpret very short echoes (that are difficult to visualize on the echo pattern).

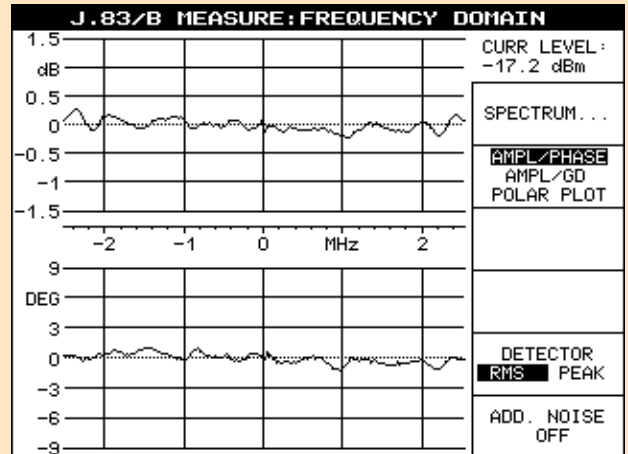

**Fig. 18: Echo pattern**


The echo pattern measurement allows the main QAM signal (0 dB relative), echoes and pre-echoes to be visualized and measured (numeric values). The range function allows the visualization of the reflections. The units of the X axis and of the numeric values can be changed from  $\mu$ s to km or even miles, depending on the application.

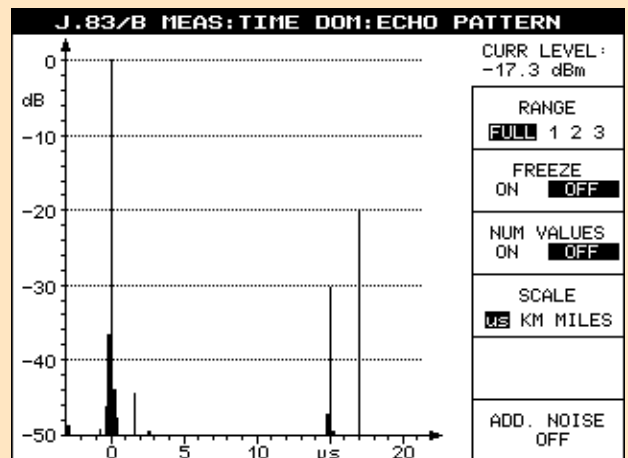

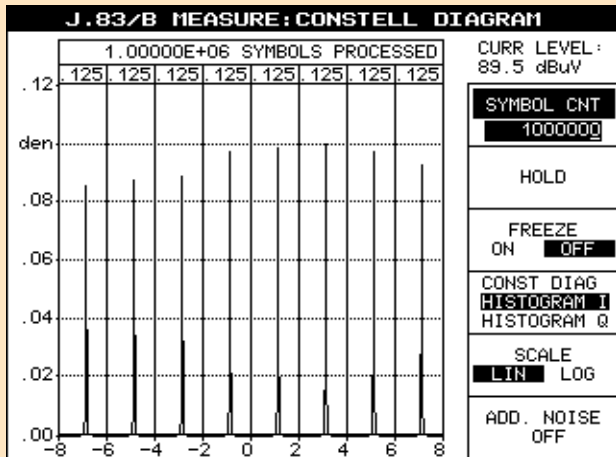


**Fig. 19: Histogram I**

Histogram I represents the distribution of the quadrature amplitude modulated (QAM) signal on the X axis (I for inphase), and can be expressed in a linear or logarithmic scale. It allows an estimate of the interferer's origin (interferer, Gaussian noise, etc). Linear scaling is used in this plot.

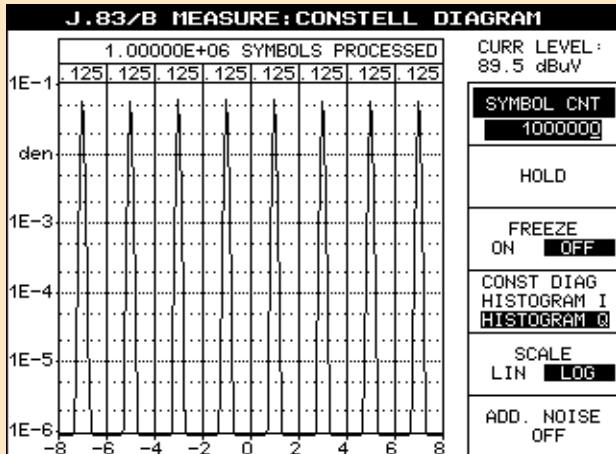

**Fig. 20: Histogram Q**

Same representation as Fig. 15 — but referring to the distribution of the Q component projected on the X axis (Q for quadrature). Logarithmic scaling is used in this plot.

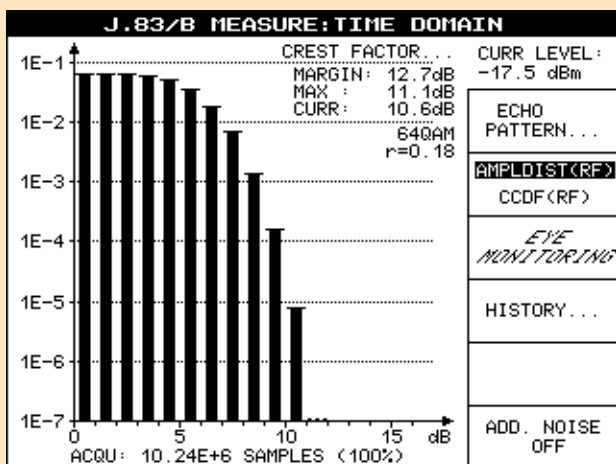

**Fig. 21: Amplitude distribution**


The measurement function for displaying the amplitude distribution or the CCDF (complementary cumulative distribution function) is used to detect nonlinear distortion.

The frequency distribution of the QAM signal is divided into several 1 dB windows to determine the amplitude distribution. Information on the crest factor is obtained from the frequency distribution and displayed in the upper right-hand corner of the graph. The reference values are marked by short horizontal lines.

# ITU-T J.83/B

**Fig. 22: Complementary cumulative distribution function (CCDF)**


In contrast to the amplitude distribution, each trace point indicates how often a certain voltage level is attained or exceeded. The ideal frequencies are displayed as short, horizontal lines at 1 dB intervals (reference values) so that the amplitude distribution of the applied signal can be compared with that of an ideal QAM signal. Any deviation from the ideal distribution is then identified by the deviations of the column heights and the value of the crest factor, for example due to clipping in the modulator output stage.

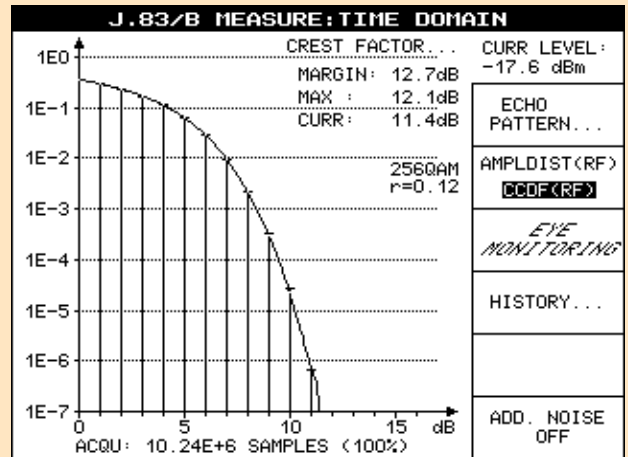

**Fig. 23: History function**

This measurement is just what is required for long-term ITU-T J.83/B modulator monitoring in cable headends, and does not require any additional tools.

The key parameters (level, synchronization information, MER/dB, MER/%, EVM/%, BER before and after Reed-Solomon decoder and MPEG2 TS data error) are, therefore, displayed in graphical form. This mode can also display all values numerically (average, max, min, current). BER and level measurements run continuously and are independent of other measurements.

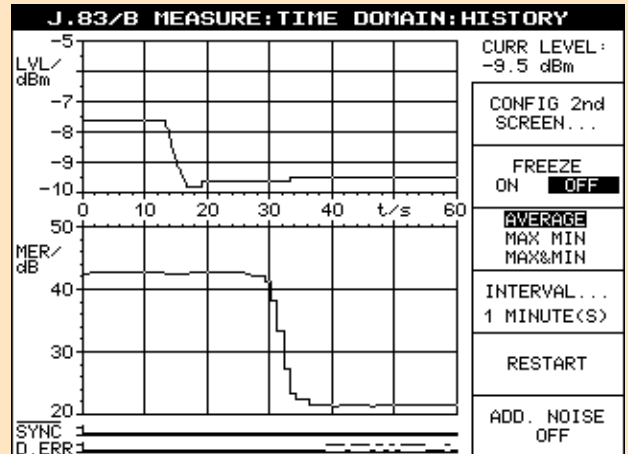

**Fig. 24: Monitoring/Alarm register**

The EFA checks the input level (LV), QAM synchronization (SY), modulation error ratio (ME), error vector magnitude (EV), bit error ratio before Reed-Solomon decoder (BR) and MPEG2 data errors (DE) of the ITU-T J.83/B signal at a rate of once per second.

All alarm messages are stored in the alarm register together with the date and time.

Up to 1000 entries can be stored.

J.83/B ALARM							
SET RF	CHANNEL	ATTEN : 25 dB					
213.00 MHz	13	-17.4 dBm					
	DATE	TIME	ALARM			REGISTER CLEAR...	
NO	02.08.01	17:09:55	LV	SY	ME	EV	BR DE
35	02.08.01	17:09:08	--	--	ME	EV	-- --
36	02.08.01	17:09:09	--	--	--	--	-- --
37	02.08.01	17:09:12	--	--	ME	EV	-- --
38	02.08.01	17:09:13	--	--	--	--	-- --
39	02.08.01	17:09:18	--	--	ME	EV	-- --
40	02.08.01	17:09:21	--	--	--	--	-- --
41	02.08.01	17:09:26	LV	SY	ME	EV	BR DE
42	02.08.01	17:09:27	--	SY	ME	EV	BR DE
43	02.08.01	17:09:29	--	--	ME	EV	BR --
44	02.08.01	17:09:30	--	--	ME	EV	-- --
45	02.08.01	17:09:39	--	--	--	--	-- --



## Typical applications

### EFA for production of modulators

The EFA's analysis capabilities permit in-depth testing of the cable modulator's performance thanks to the outstanding MER/EVM dynamic range, amplitude distribution measurement and spectrum analysis. Another feature is the Equalizer ON/FREEZE/OFF function, which is mandatory during the alignment phase of the modulators. Finally, the high accuracy and repeatability of the measurements makes the EFA ideally suited for the production of QAM modulators.

### Cable headend monitoring

The capability of the EFA to handle multi-channel reception with the spectrum measurement and the history functions (graphical measurement representation versus time) permit the unit to monitor cable headends. In addition, an alarm is triggered if one of the selected parameters exceeds the set threshold (all thresholds can be individually configured). Incident level, QAM synchronization, MER (modulation error ratio), EVM (error vector magnitude), BER before Reed-Solomon decoder and MPEG2 TS data error can be checked in realtime independently of other measurements and decoding. If an error occurs, a 1000-line register is available for recording the date, time and description of the event.

### EFA in research and development laboratories

Thanks to the high-quality frontend design, the dynamic range of the modulation error ratio measurement (MER dynamic range better



than 41 dB) allows the unit to be used as a reference demodulator in research and development laboratories.

### EFA as a multistandard digital and analog platform

Since the analog standard M/N is still heavily in use, and broadcasters need a future-proof solution for their short- and long-term investment, an analog M/N

NTSC/BTSC demodulator can optionally be implemented. It covers all application areas from R&D to cable headend measurements. Furthermore, to protect your investment, the unit can be updated by means of options to demodulate and analyze the ATSC/8VSB digital terrestrial and DVB-C digital cable standards. These unique features make the new EFA family members THE measurement devices for the present and the future.

#### Summary of measurements required for the various ITU-T J.83/B applications

ITU-T J.83/B application	Level	BER	I/Q parameters	SNR	Phase jitter	MER/EVM	Constellation diagram Histograms	Frequency spectrum	Amplitude (f) - phase (f) - group delay (f)	Amplitude distribution - CCDF	Echo pattern	History	Alarm	Statistics
Production of modulators	✓	✓	✓	✓	✓	!	✓	✓	✓	✓				
Cable headend monitoring	✓	✓				✓	✓	✓			✓	!	✓	✓
Research and development	✓	✓	✓	✓	✓	✓	!	✓	✓	✓	✓	✓		
Service	✓	✓	✓			✓	!	✓				✓	✓	✓

! most important measurement    ✓ required measurement

# Analog TV

## EFA models 90/93 – new high-end M/N TV demodulator

Rohde & Schwarz provides a high-end measurement device that can cover all application areas from R&D to field measurements. This EFA model was created to offer the best performance and the most useful features to test standard M/N transmitters under optimal conditions. To accomplish this, a sound trap filter has been integrated in the unit as well as synchronous and envelope detectors, a BTSC audio decoder and additional features!

To further protect your investment, the unit can be updated by means of options to demodulate and analyze the upcoming digital TV standards ATSC/8VSB and ITU-T J.83/B. These unique features make the new EFA family members THE measurement devices for the present and the future!

### EFA 90/93 characteristics

Fully compatible with the FCC standard, the EFA 90/93 models receive and demodulate any analog TV signals to

standard M/N (NTSC/BTSC and PAL). All key parameters for demodulating the received signal can be automatically or manually selected:

- ◆ Switchable video bandwidth (sound trap)
- ◆ Switchable group delay correction
- ◆ Switchable envelope or synchronous (5 different modes) detector
- ◆ Demodulation using intercarrier method
- ◆ Balanced audio outputs
- ◆ Measurement functions for
  - vision/sound carrier power ratio
  - FM sound carrier and pilot deviation
- ◆ Measurement of video modulation depth and residual picture carrier
- ◆ Input of any IF frequency with the aid of the EFA-B3 option: frequency range continuously tunable from 5 MHz to 1000 MHz
- ◆ Special function: invert spectrum feature (with option EFA-B3)

### Features

The EFA models 90/93 provide high-precision demodulated baseband signals (vision and sound) for measurements in various applications (TV transmitters, cable headends, coverage measurements, R&D). At the same time, all relevant RF parameters are measured at high speed and represented in a logically arranged way (Fig. 25). User-configurable alarm messages permit unattended monitoring of the received signals as well as switchover to alternative links in the event of a failure.

The high-end demodulator version is used for on-site measurements on TV transmitters. This version offers particularly low-distortion demodulation of the broadcast signal. It is perfectly suited for these types of measurements; its low measurement uncertainty permits optimal alignment as well as permanent quality control of the transmitter.

**Fig. 25: Measurement window**

All parameters for the demodulated standard M/N TV channel are displayed on a single screen and can be checked at a glance:

- Vision carrier level
- Video modulation depth
- Bar/sync/video amplitudes (expressed in IRE)
- Vision/sound level ratio
- Main and BTSC channel FM deviation
- FM deviation of MTS pilot
- Sound mode indication (Mono, Stereo, SAP)

NTSC/BTSC MEASURE			
SET RF	CHANNEL	ATTEN : 20 dB	STANDARD
61.25 MHz	3	90.7 dBuV	M/N
<b>VISION CARRIER:</b>			
LEVEL		90.7 dBuV	
MODULATION DEPTH		68.9 %	
BAR AMPLITUDE		79.2 IRE	
SYNC AMPLITUDE		31.0 IRE	
VIDEO AMPLITUDE		110.2 IRE	
<b>SOUND CARRIER:</b>			
VISION / SOUND CARRIER RATIO		12.9 dB	
FM DEVIATION MAIN CHANNEL		31.1 kHz	
FM DEVIATION BTSC CHANNEL		44.8 kHz	
FM DEVIATION MTS PILOT		5.38 kHz	
MULTICHANNEL TV SOUND		STEREO + SAP	

## Specification of intermodulation

### In-channel distortion

In-channel distortion is determined by means of a modulated TV signal with a vision carrier ( $f_{VC}$ ), a colour subcarrier ( $f_{SB}$ ) and a sound carrier ( $f_{SC}$ ). Modulation is chosen such that the vision carrier is lowered by 6 dB, the colour subcarrier by 14 dB and the sound carrier by 10 dB relative to the sync pulse level. The level of the intermodulation product is measured at the video output relative to the black-to-white transition of the video signal. Fig. 26 shows the signals involved and the reference level at the RF.

### Out-of-channel distortion

The effect of signals outside the received channel is described by the 3rd-order intercept point (TOI). For the EFA family, this parameter is specified on the basis of a three-tone measurement with the following signals: a wanted carrier at the receive frequency  $f_{VC}$  and two unwanted carriers 14 MHz and 15 MHz above the receive frequency.

The unwanted frequencies are chosen to be within the bandwidth of the RF preselection but outside the bandwidth of the first IF filter. The effect of out-of-channel interference on the receiver can thus reliably be determined. It is assumed that each of the three signals has a level  $P = -33$  dBm. The level of the intermodulation product  $\Delta IM$  1 MHz relative to the wanted carrier is measured (see Fig. 27, measurement at the RF). The 3rd-order intercept point is:

$$TOI/dBm = P/dBm + \frac{\Delta IM/dB}{2} + 3$$

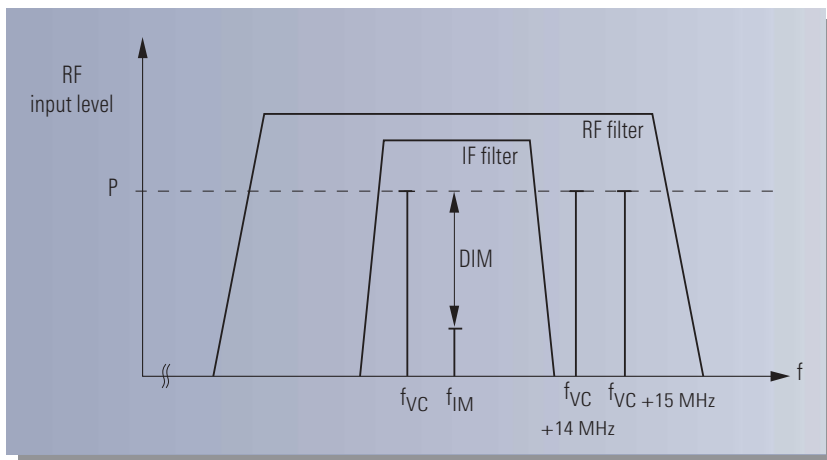


Fig. 26

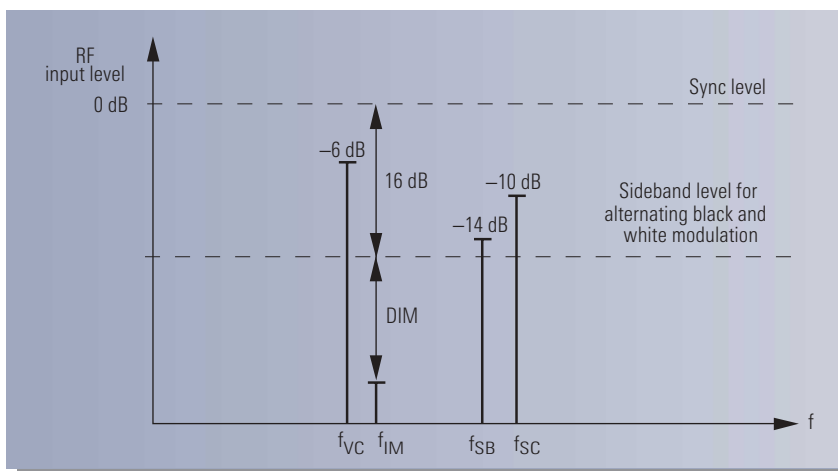


Fig. 27

# Specifications

## ATSC/8VSB characteristics (specific to EFA models 50/53 or EFA-B20 + EFA-K22)

	Standard test receiver	High-end test receiver with option EFA-B3	High-end demodulator
<b>RF input</b>	selective	selective <sup>1)</sup>	non-selective
Connector	50 Ω or 75 Ω, BNC or N female, front or rear panel	50 Ω, N female, rear panel and 75 Ω, BNC female, rear panel	50 Ω, N female, rear panel
Return loss	≥14 dB in channel with 50 Ω connector and input attenuation ≥10 dB ≥12 dB in channel with 75 Ω connector and input attenuation ≥10 dB	≥17 dB (>20 dB typ.) in channel with 50 Ω connector ≥14 dB (>17 dB typ.) in channel with 75 Ω connector	≥30 dB
Frequency range <sup>2)</sup>	48 MHz to 862 MHz	4.5 MHz <sup>3)</sup> to 1000 MHz	45 MHz to 1000 MHz
Level range <sup>4)</sup>	-71 dBm to +20 dBm (low distortion, preamplifier = OFF) -75 dBm to +20 dBm (low noise, preamplifier = OFF) -80 dBm to +13 dBm (low noise, preamplifier = ON)	-78 dBm to +20 dBm (normal) <sup>5)</sup> -77 dBm to +20 dBm (low distortion) <sup>5)</sup> -80 dBm to +16 dBm (low noise) <sup>5)</sup>	-50 dBm to +20 dBm
Noise figure	12 dB typ. (low noise) 7 dB typ. (low noise, preamplifier = ON)	9 dB typ. (normal) <sup>6)</sup> 7 dB typ. (low noise) <sup>6)</sup> 11 dB typ. (low distortion) <sup>6)</sup>	
Image frequency rejection IF rejection	≥70 dB (VHF) and ≥50 dB (UHF)	100 dB 100 dB	
<b>Local oscillator</b>			
Resolution	1 Hz	1 Hz	1 Hz
Frequency error	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>
Phase noise <sup>7)</sup>	≥50 dB	≥58 dB	≥62 dB <sup>8)</sup>
SSB phase noise (RF = 860 MHz)	typ. -82 dBc /Hz at 1 kHz typ. -90 dBc /Hz at 10 kHz	typ. -91 dBc /Hz at 1 kHz typ. -100 dBc /Hz at 10 kHz	typ. -93 dBc /Hz at 1 kHz typ. -106 dBc /Hz at 10 kHz
<b>System performance</b>			
MER	≥40 dB <sup>9)</sup>	≥41 dB <sup>10)</sup>	≥42 dB <sup>11)</sup>
EVM	≤0.66% <sup>9)</sup>	≤0.59% <sup>10)</sup>	≤0.52% <sup>11)</sup>
SNR	≥42dB <sup>9)</sup>	≥43 dB <sup>10)</sup>	≥44 dB <sup>11)</sup>

<sup>1)</sup> The selective RF inputs of the high-end TV test receiver (with option EFA-B3) are additional to the non-selective RF input of the high-end demodulator. For specifications involving the non-selective RF input see the high-end demodulator column.

<sup>2)</sup> Center frequency.

<sup>3)</sup> For frequencies < 10 MHz: group delay tilt increases up to 200 ns, amplitude tilt increases up to 0.7 dB pp typ., minimum input level: -30 dBm, SAW filter ON.

<sup>4)</sup> For quasi error-free MPEG2 transport stream.

<sup>5)</sup> At low input frequencies such as 4.57 MHz: additional tilt (0.7 dB pp typ.), minimum input level: -30 dBm, SAW filter ON.

<sup>6)</sup> RF >47.15 MHz

<sup>7)</sup> FM S/N ratio measured at IF output, referred to ±30 kHz frequency deviation and 500 Hz modulation frequency, deemphasis 50 μs, measured to DIN45405, weighted to CCIR468-3.

<sup>8)</sup> In frequency range 45 MHz to 900 MHz.

<sup>9)</sup> Signal power >-40 dBm, equalizer on.

<sup>10)</sup> Signal power >-43 dBm, equalizer on.

<sup>11)</sup> Signal power >-30 dBm, equalizer on.

## ATSC/8VSB common characteristics

<b>IF input</b>	50 $\Omega$ , BNC female, rear panel	
Return loss	$\geq 20$ dB in channel	
Center frequency	36 MHz	
Level range	-30 dBm to -5 dBm	
<b>IF output</b>	50 $\Omega$ , BNC female, rear panel	
Return loss	$\geq 20$ dB	
Center frequency	36 MHz	
Level, regulated	-17 dBm	
<b>MPEG2 TS parallel output</b>	LVDS (188 bytes)	
<b>MPEG2 TS ASI output</b>	serial MPEG2 transport stream (ASI); 75 $\Omega$	
<b>SMPTE 310M output</b>	800 mV pp, 75 $\Omega$ (only with nominal symbol rate of 10.762238 Msymbols/s)	
Symbol rate	2 Msymbols/s to 11 Msymbols/s (default 10.762238 Msymbols/s)	
Bandwidth (SAW filter)	2 MHz, 6 MHz, 8 MHz or SAW filter OFF	
Channel correction	self-adapting equalizer, equalizer freeze, equalizer off	
<b>Measurements</b>	signal power	SER (segment error ratio) <sup>1)</sup>
	pilot carrier frequency offset	segment errors per second <sup>1)</sup>
	pilot value	EVM (error vector magnitude)
	pilot amplitude error	MER (modulation error ratio)
	data signal power to pilot carrier power ratio	SNR (signal/noise ratio)
	symbol rate offset	phase jitter
	MPEG2 TS bit rate	crest factor
	BER (bit error ratio) before and after Reed-Solomon decoder	shoulder attenuation (referred to FCC recommendation)
<b>Graphic displays</b>	constellation diagram	polar plot
	histogram I/Q	amplitude distribution (RF)
	frequency spectrum	CCDF (RF)
	amplitude frequency response	eye monitoring
	phase frequency response	history
	group delay frequency response	
<b>Alarm messages</b>	signal power, synchronization, EVM, MER, BER before Reed-Solomon decoder, MPEG2 data error	
Storage	alarm message with date and time, up to 1000 messages	
<b>Memory for instrument setup storage</b>	0 to 4	

<sup>1)</sup> Available from April 2002.

Test parameters	Range	Resolution	Error
Signal power	depending on model, see above	0.1 dB	<3 dB, typ. <1 dB
MER (modulation error ratio)	18 dB to 30 dB 30 dB to 35 dB	0.1 dB 0.1 dB	$\leq 0.8$ dB $\leq 1.0$ dB
MER (modulation error ratio)	1.9% to 3.2% 3.2% to 12.5%	0.01% 0.01%	$\leq 12\%$ of actual value $\leq 10\%$ of actual value
EVM (error vector magnitude)	1.17% to 2.07% 2.07% to 8.3%	0.01% 0.01%	$\leq 12\%$ of actual value $\leq 10\%$ of actual value
SNR (signal/noise ratio)	18 dB to 30 dB 30 dB to 35 dB	0.1 dB 0.1 dB	$\leq 0.5$ dB $\leq 0.8$ dB
Data signal/pilot power ratio	7 dB to 19 dB	0.1 dB	$\leq 0.2$ dB (SAW filter OFF)
Pilot amplitude error	-8 dB to +4 dB	0.1 dB	$\leq 0.2$ dB (SAW filter OFF)
Pilot value	0.5 to 2	0.01	$\leq 0.03$ (SAW filter OFF)
Pilot carrier frequency offset	$\pm 100$ kHz	1 Hz	$\leq 280$ Hz + 2 ppm x RF
Symbol rate offset	$\pm 150$ ppm	0.1 ppm	<10 ppm, typ. <3 ppm
BER before Reed-Solomon	$1.0 \times 10^{-3}$ to $0.1 \times 10^{-15}$	$0.1 \times 10^{-\text{exponent}}$	—
BER after Reed-Solomon	$1.0 \times 10^{-5}$ to $0.1 \times 10^{-14}$	$0.1 \times 10^{-\text{exponent}}$	—
SER (segment error ratio) <sup>1)</sup>	$1.3 \times 10^{-3}$ to $0.1 \times 10^{-12}$	$0.1 \times 10^{-\text{exponent}}$	—
Segment errors/s <sup>1)</sup>	$1.0 \times 10^{-12}$ to $10 \times 10^{-3}$	$0.1 \times 10^{-\text{exponent}}$	—

<sup>1)</sup> Available from April 2002.

# Specifications

## ITU-T J.83/B characteristics (specific to EFA models 70/73 or options EFA-B20 + EFA-K23)

	Standard test receiver	High-end test receiver with option EFA-B3	High-end demodulator
<b>RF input</b>	selective	selective <sup>1)</sup>	non-selective
Connector	50 Ω or 75 Ω, BNC or N female, front or rear panel	50 Ω, N female, rear panel and 75 Ω, BNC female, rear panel	50 Ω, N female, rear panel
Return loss	≥14 dB in channel with 50 Ω connector and input attenuation ≥10 dB ≥12 dB in channel with 75 Ω connector and input attenuation ≥10 dB	≥17 dB (>20 dB typ.) in channel with 50 Ω connector ≥14 dB (>17 dB typ.) in channel with 75 Ω connector	≥30 dB
Frequency range <sup>2)</sup>	48 MHz to 862 MHz	4.5 MHz <sup>3)</sup> to 1000 MHz	45 MHz to 1000 MHz
Level range <sup>4)</sup>	-58 dBm to +20 dBm (low distortion, preamplifier = OFF) -62 dBm to +20 dBm (low noise, preamplifier = OFF) -67 dBm to +13 dBm (low noise, preamplifier = ON)	-66 dBm to +20 dBm (normal) <sup>5)</sup> -65 dBm to +20 dBm (low distortion) <sup>5)</sup> -68 dBm to +16 dBm (low noise) <sup>5)</sup>	-50 dBm to +20 dBm
Noise figure	12 dB typ. (low noise) 7 dB typ. (low noise, preamplifier = ON)	9 dB typ. (normal) <sup>6)</sup> 7 dB typ. (low noise) <sup>6)</sup> 11 dB typ. (low distortion) <sup>6)</sup>	
Image frequency rejection	≥70 dB (VHF) and ≥50 dB (UHF)	100 dB	
IF rejection		100 dB	
<b>Local oscillator</b>			
Resolution	1 Hz	1 Hz	1 Hz
Frequency error	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>
Phase noise <sup>7)</sup>	≥50 dB	≥58 dB	≥62 dB <sup>8)</sup>
SSB phase noise (RF = 860 MHz)	typ. -82 dBc /Hz at 1 kHz typ. -90 dBc /Hz at 10 kHz	typ. -91 dBc /Hz at 1 kHz typ. -100 dBc /Hz at 10 kHz	typ. -93 dBc /Hz at 1 kHz typ. -106 dBc /Hz at 10 kHz
<b>System performance</b>			
MER	≥40 dB <sup>9)</sup>	≥41 dB <sup>10)</sup>	≥42 dB <sup>11)</sup>
EVM	≤0.66% <sup>9)</sup>	≤0.59% <sup>10)</sup>	≤0.52% <sup>11)</sup>
SNR	≥42dB <sup>9)</sup>	≥43 dB <sup>10)</sup>	≥44 dB <sup>11)</sup>

<sup>1)</sup> The selective RF inputs of the high-end TV test receiver (with option EFA-B3) are additional to the non-selective RF input of the high-end demodulator. For specifications involving the non-selective RF input see the high-end demodulator column.

<sup>2)</sup> Center frequency.

<sup>3)</sup> For frequencies < 10 MHz: group delay tilt increases up to 200 ns, amplitude tilt increases up to 0.7 dB pp typ., minimum input level: -30 dBm, SAW filter ON.

<sup>4)</sup> For quasi error-free MPEG2 transport stream, 256QAM.

<sup>5)</sup> At low input frequencies such as 4.57 MHz: additional tilt (0.7 dB pp typ.), minimum input level: -30 dBm, SAW filter ON.

<sup>6)</sup> RF >47.15 MHz

<sup>7)</sup> FM S/N ratio measured at IF output, referred to ±30 kHz frequency deviation and 500 Hz modulation frequency, deemphasis 50 μs, measured to DIN45405, weighted to CCIR468-3.

<sup>8)</sup> In frequency range 45 MHz to 900 MHz.

<sup>9)</sup> Signal power >-40 dBm, equalizer on.

<sup>10)</sup> Signal power >-43 dBm, equalizer on.

<sup>11)</sup> Signal power >-30 dBm, equalizer on.





## ITU-T J.83/B common characteristics

<b>IF input</b>	50 $\Omega$ , BNC female, rear panel	
Return loss	$\geq 20$ dB in channel	
Center frequency	36 MHz	
Level range	-30 dBm to -5 dBm	
<b>IF output</b>	50 $\Omega$ , BNC female, rear panel	
Return loss	$\geq 20$ dB	
Center frequency	36 MHz	
Level, regulated	-17 dBm	
<b>MPEG2 TS parallel output</b>	LVDS (188 bytes)	
<b>MPEG2 TS ASI output</b>	serial MPEG2 transport stream (ASI); 75 $\Omega$	
Symbol rate	1 Msymbols/s to 6.999 Msymbols/s	
Bandwidth (SAW filter)	2 MHz, 6 MHz, 8 MHz or SAW filter OFF	
Channel correction	self-adapting equalizer, equalizer freeze, equalizer off	
<b>Measurements</b>	signal power carrier frequency offset symbol rate offset MPEG2 TS bit rate BER (bit error ratio) before and after Reed-Solomon decoder EVM (error vector magnitude) MER (modulation error ratio) SNR (signal/noise ratio) phase jitter I/Q amplitude imbalance I/Q quadrature error carrier suppression crest factor shoulder attenuation	
<b>Graphic displays</b>	constellation diagram histogram I/Q frequency spectrum amplitude frequency response phase frequency response group delay frequency response	polar plot amplitude distribution (RF) CCDF (RF) eye monitoring history
<b>Alarm messages</b>	signal power, synchronization, EVM, MER, BER before Reed-Solomon decoder, MPEG2 data error	
Storage	alarm message with date and time, up to 1000 messages	
<b>Memory for instrument setup storage</b>	0 to 4	

Test parameters	Range	Resolution	Error
Signal power	corresponding to level range	0.1 dB	<3 dB, typ. <1 dB
MER dB (modulation error ratio in dB)	18 dB to 30 dB 30 dB to 35 dB	0.1 dB 0.1 dB	$\leq 0.8$ dB $\leq 1.0$ dB
MER % (modulation error ratio in %)	1.9% to 3.2% 3.2% to 12.5%	0.01% 0.01%	$\leq 12\%$ of actual value $\leq 10\%$ of actual value
EVM (error vector magnitude)	1.17% to 2.07% 2.07% to 8.3%	0.01% 0.01%	$\leq 12\%$ of actual value $\leq 10\%$ of actual value
SNR (signal/noise ratio)	18 dB to 30 dB 30 dB to 35 dB	0.1 dB 0.1 dB	$\leq 0.5$ dB $\leq 0.8$ dB
I/Q amplitude imbalance	0.00% to 5.00%	0.01%	$\leq 0.03\%$
I/Q quadrature error	0.00° to 5.00°	0.01°	$\leq 0.03^\circ$
Carrier suppression	25 dB to 45 dB 45 dB to 60 dB	0.1 dB 0.1 dB	$\leq 1.0$ dB $\leq 3.0$ dB
Carrier frequency offset	$\pm 100$ kHz	1 Hz	$\leq 280$ Hz + 2 ppm x RF
Symbol rate offset	$\pm 150$ ppm	0.1 ppm	<10 ppm, typ. <3 ppm
MPEG TS bit rate	5.333 Mbit/s to 43.433 Mbit/s	1 kbit/s	<1 kbit/s
BER before Reed-Solomon	$1.0 \times 10^{-3}$ to $0.1 \times 10^{-15}$	$0.1 \times 10^{-\text{exponent}}$	—
BER after Reed-Solomon	$1.0 \times 10^{-5}$ to $0.1 \times 10^{-14}$	$0.1 \times 10^{-\text{exponent}}$	—

# Specifications

## NTSC/BTSC characteristics (specific to EFA models 90/93 or option EFA-B30)

	Standard test receiver	High-end test receiver with option EFA-B3	High-end demodulator
<b>RF input</b>	selective	selective <sup>1)</sup>	non-selective
Connector	50 Ω or 75 Ω, BNC or N female, front or rear panel	50 Ω, N female, rear panel and 75 Ω BNC female, rear panel	50 Ω, N female, rear panel
Return loss	≥14 dB in channel with 50 Ω connector and input attenuation ≥10 dB ≥12 dB in channel with 75 Ω connector and input attenuation ≥10 dB	≥17 dB (>20 dB typ.) in channel with 50 Ω connector ≥14 dB (>17 dB typ.) in channel with 75 Ω connector	≥30 dB
Frequency range <sup>2)</sup>	45 MHz to 860 MHz	5 MHz <sup>3)</sup> to 1000 MHz	45 MHz to 1000 MHz
Level range <sup>4)</sup>	-67 dBm to +13 dBm (preamplifier = OFF) -77 dBm to +3 dBm (preamplifier = ON)	-67 dBm to +21 dBm (normal) <sup>5)</sup> -67 dBm to +21 dBm (low distortion) <sup>5)</sup> -77 dBm to +21 dBm (low noise) <sup>5)</sup>	-41 dBm to +21 dBm
Noise figure	12 dB typ. (low noise) 7 dB typ. (low noise, preamplifier = ON)	9 dB typ. (normal) 7 dB typ. (low noise) 11 dB typ. (low distortion)	
Image frequency rejection IF rejection	≥70 dB (VHF) <sup>6)</sup> and ≥50 dB (UHF) <sup>6)</sup>	100 dB 100 dB	
<b>Local oscillator</b>			
Resolution	1 Hz	1 Hz	1 Hz
Frequency error	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>
Phase noise <sup>7)</sup>	≥50 dB	≥58 dB	≥62 dB <sup>8)</sup>
SSB phase noise (RF = 860 MHz)	typ. -82 dBc /Hz at 1 kHz typ. -90 dBc /Hz at 10 kHz	typ. -91 dBc /Hz at 1 kHz typ. -100 dBc /Hz at 10 kHz	typ. -93 dBc /Hz at 1 kHz typ. -106 dBc /Hz at 10 kHz
<b>Video demodulation</b>			
Signal/noise ratio (referred to b/w transition)	P <sub>RF</sub> ≥ -30 dBm	P <sub>RF</sub> = -33 dBm	P <sub>RF</sub> ≥ -1 dBm
S/N <sub>rms</sub> weighted to CCIR Rec. 567	low noise: ≥60 dB typ. 64 dB low distortion: ≥57 dB typ. 59 dB	low noise: ≥64 dB typ. 66 dB low distortion: ≥62 dB typ. 64 dB	≥67 dB typ. 70 dB
<b>Nonlinear distortion</b> (with synchronous detector)			
Luminance nonlinearity	≤2%	≤2%	≤2%
Differential gain	≤2%	≤2%	≤2%
Differential phase	≤1°	≤1°	≤1°
Intermodulation in channel, referred to b/w transition	low noise: ≥52 dB low distortion: ≥62 dB	low noise: ≥52 dB low distortion: ≥62 dB	≥55 dB
3rd-order intercept point (0 dB attenuation)	low noise: ≥0 dB low distortion: ≥+5 dB	normal: ≥+10 dBm low distortion: ≥+14 dBm	
<b>Linear distortion</b> <sup>9)</sup>			
12.5T pulse amplitude error Sound trap OFF (BW=5 MHz) Sound trap ON (BW=4 MHz)			≤5% typ. <2% ≤10% typ. <5%
Amplitude frequency response Sound trap OFF Sound trap ON	reference: 0.5 MHz ≤0.5 dB (DC to 4.2 MHz) ≤0.5 dB (DC to 3.6 MHz)	reference: 0.5 MHz ≤0.35 dB (DC to 4.2 MHz) ≤0.35 dB (DC to 3.6 MHz)	reference: 0.5 MHz ≤0.25 dB (DC to 4.2 MHz) ≤0.25 dB (DC to 3.6 MHz)
Group delay frequency response Flat group delay (≤4.2 MHz) FCC group delay (≤3.6 MHz)	reference 0.1 MHz ≤25 ns ≤25 ns	reference 0.1 MHz ≤20 ns ≤20 ns	reference 0.1 MHz ≤20 ns ≤20 ns
Transient response (with synchronous detection)	12.5/75% modulation	12.5/75% modulation	12.5/75% modulation
2T pulse k factor	≤1%	≤1% typ. 0.6%	≤1% typ. 0.5%
2T pulse amplitude error			≤2% typ. 1%
12.5T pulse amplitude error			≤5%
Chrominance/luminance gain			≤3%
Chrominance/luminance delay Flat group delay FCC group delay	≤20 ns ≤20 ns	≤15 ns ≤20 ns	≤12 ns ≤20 ns
Tilt, 15 kHz, T <sub>rise</sub> 200 ns	≤1%	≤1%	≤1%

<sup>1)</sup> The selective RF inputs of the high-end TV test receiver (with option EFA-B3) are additional to the non-selective RF input of the high-end demodulator. For specifications involving the non-selective RF input see the high-end demodulator column.

<sup>2)</sup> Vision carrier frequency.

<sup>3)</sup> For frequencies < 10 MHz: group delay tilt increases up to 200 ns, amplitude tilt increases up to 0.7 dB pp typ., minimum input level: -30 dBm, SAW filter ON.

<sup>4)</sup> Levels are rms values referred to sync. pulse.

<sup>5)</sup> In receive range 5 MHz to 20 MHz: -41 dBm to +20 dBm.

<sup>6)</sup> Image frequency of vision carrier.

<sup>7)</sup> FM S/N ratio measured at IF output, referred to ±30 kHz frequency deviation and 500 Hz modulation frequency, deemphasis 50 μs, measured to DIN45405, weighted to CCIR468-3.

<sup>8)</sup> In frequency range 45 MHz to 900 MHz.

<sup>9)</sup> Additional ripple caused by SAW filter.

## Common NTSC/BTSC demodulator characteristics (EFA models 90/93 or option EFA-B30)

<b>IF input</b>	50 $\Omega$ , BNC female, rear panel
Vision carrier frequency	38.9 MHz
Return loss (34 MHz to 40 MHz)	$\geq 20$ dB
Input level	-21 dBm to -1 dBm (rms value referred to sync pulse)
<b>IF output</b>	50 $\Omega$ , BNC female, rear panel
IF vision carrier frequency	38.9 MHz
Return loss (34 MHz to 40 MHz)	$\geq 20$ dB
Input level, regulated	-7 dBm (rms value referred to sync pulse)
Amplitude frequency response (34 MHz to 40 MHz)	$\leq 0.25$ dB
<b>Intercarrier input</b>	50 $\Omega$ , BNC female, rear panel
Intercarrier frequency	4.5 MHz
Return loss (4.4 MHz to 4.6 MHz)	$\geq 20$ dB
Input level	-35 dBm to -15 dBm
<b>Zero reference</b>	selectable: internal/external/off
Position of internal zero reference pulse	8 $\mu$ s to 55 $\mu$ s in line, line 10 to 22 selectable, field 1/2 selectable
External zero reference input	75 $\Omega$ , BNC female, rear panel
Control voltage	>1 V
Delay of carrier blanking relative to control pulse	<3 $\mu$ s
<b>Video demodulation</b>	synchronous and envelope detector (switchable)
Synchronous detector PLL mode: PLL bandwidth	sampled: medium, slow continuous: fast, medium, slow
Video bandwidth/group delay (sound trap)	4 MHz (FCC), 5 MHz (FCC), 5 MHz (FLAT)
<b>Video outputs</b>	75 $\Omega$ , BNC female, front panel ; 75 $\Omega$ , BNC female, rear panel
Return loss (0 to 5 MHz)	$\geq 26$ dB
Output level (CCVS, modulation depth 87.5%)	1.0 V <sub>pp</sub> $\pm 2\%$ into 75 $\Omega$
DC offset of video signal, zero vision carrier	0 V $\pm 20$ mV
Decoupling of outputs (level variation at terminated output when switching the other output between short circuit and open circuit)	$\leq 1\%$
<b>Quadrature output of synchronous detector</b>	75 $\Omega$ , BNC female, rear panel
Return loss (0 to 5 MHz)	$\geq 20$ dB
Gain error referred to inphase signal	$\leq 1$ dB
<b>Audio demodulation modes</b>	split carrier, quasi split carrier, intercarrier
<b>Audio composite output</b>	75 $\Omega$ , BNC female, rear panel
Output level into 75 $\Omega$	10 mV/kHz FM deviation
Amplitude frequency response	
30 Hz to 47 kHz	$\leq \pm 0.05$ dB
47 kHz to 120 kHz	$\leq \pm 0.5$ dB
Phase frequency response	
30 Hz to 47 kHz	$\leq \pm 0.5^\circ$
THD ( $\pm 25$ kHz FM deviation)	
$f_{mod}$ 30 Hz to 15 kHz	$\leq 0.1\%$
$\pm f_{mod}$ 15 kHz to 50 kHz	$\leq 0.5\%$
<b>Audio stereo outputs (BTSC/MTS)</b>	Lemo Triax connectors, in pairs, front panel, unbalanced, $Z < 10 \Omega$
Signals	left/right, SAP, mono, L + R/L - R
<b>Audio mono output (main channel)</b>	Lemo Triax connector rear panel, balanced, non-floating, $Z < 10 \Omega$
Output level into 600 $\Omega$ at $\pm 25$ kHz FM deviation and 500 Hz $f_{mod}$	0 dBm to 10 dBm, adjustable in 0.1 dB steps
Deemphasis	75 $\mu$ s/OFF
Amplitude frequency response, 30 Hz to 15 kHz	$\leq \pm 0.3$ dB
THD, $\pm 25$ kHz FM deviation, $f_{mod}$ 30 Hz to 15 kHz	$\leq 0.1\%$
Signal/noise ratio	
Deemphasis 75 $\mu$ s, referred to $\pm 25$ kHz FM deviation)	measured to DIN 45405, weighted to CCIR 468-3
Split-carrier mode	$\geq 60$ dB
Quasi-split carrier mode/intercarrier mode	
With all-black picture modulation	$\geq 60$ dB
With sinewave modulation (0 to 4 MHz)	$\geq 50$ dB
<b>Alarm messages</b>	
Vision carrier level, TV synchronization, vision/sound carrier ratio, FM deviation MTS pilot, FM deviation main channel, FM deviation BTSC channel	

# Specifications (options)

## Common NTSC/BTSC demodulator characteristics cont. (EFA models 90/93 or option EFA-B30)

Test parameters	Resolution	Error
Vision carrier level (rms value referred to sync. pulse)	0.1 dB	≤3 dB
Residual picture carrier	0.1%	≤0.5%
Modulation depth of vision carrier	0.1%	≤0.5%
BAR Amplitude	0.1 IRE	≤1 IRE
Sync Amplitude	0.1 IRE	≤1 IRE
Video Amplitude	0.1 IRE	≤1 IRE
Vision/sound carrier ratio	0.1 dB	≤2 dB
FM deviation (main channel)	100 Hz	≤3% +200 Hz
FM deviation (BTSC channel)	100 Hz	≤3% +200 Hz
FM pilot deviation (MTS pilot)	10 Hz	≤5%


## Options

### RF Preselection EFA-B3

RF preselection for High-End Demodulator Models EFA 53/73/93. Two selective RF inputs with 50 Ω and 75 Ω impedance in addition to the non-selective RF input of the high-end demodulator. Demodulation of variable IFs (analog TV) up to 50 MHz via the selective RF inputs.

<b>IF inputs</b>	selective
Connectors	50 Ω, N female, rear panel and 75 Ω, BNC female, rear panel
Return loss	17 dB (>20 dB typ.) in channel with 50 Ω connector 14 dB (>17 dB typ.) in channel with 75 Ω connector
Frequency range	4.5 MHz <sup>1)</sup> to 1000 MHz
Level range	see high-end test receiver column of relevant demodulator mode
<b>System performance</b>	
Noise figure	7 dB typ. (low noise) 9 dB typ. (normal) 11 dB typ. (low distortion)
Image frequency rejection	100 dB
IF rejection	100 dB

<sup>1)</sup> For frequencies < 10 MHz: group delay tilt increases up to 200 ns, amplitude tilt increases up to 0.7 dB pp typ., minimum input level: -30 dBm, SAW filter ON.

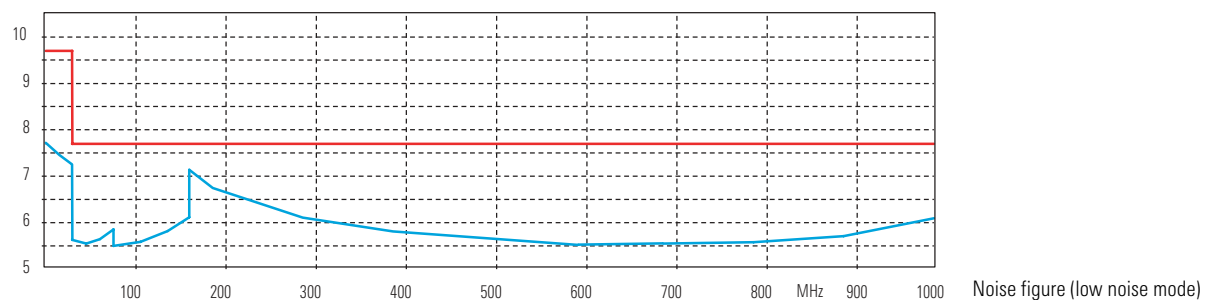

## Options (continued)

### MPEG2 Decoder EFA-B4

Realtime measurement functions: simultaneous monitoring of all signals in transport stream.

Realtime measurement functions according to test specifications for DVB systems (ETR290): priorities 1, 2 and 3.

<b>Signal format</b>	
Transport stream	to ISO/IEC 1-13818
Data rate of transport stream	up to 54 Mbit/s
Length of data packets	188/204 bytes, automatic switchover
<b>Signal input</b>	
Internal: from DVB demodulator	
External: asynchronous serial MPEG2 transport stream, 270 Mbit/s (TS ASI)	BNC connector on rear panel, 200 mV pp to 1 V pp, 75 $\Omega$
<b>Video signal output</b>	
CCVS (PAL, SECAM, NTSC)	BNC connector on rear panel, 1 V pp $\pm$ 1%, 75 $\Omega$
Video serial digital (ITU-R 601), 270 Mbit/s	BNC connector on rear panel, 800 mV pp, 75 $\Omega$
<b>Audio signal outputs</b>	
Connectors front panel	Lemo Triax female, in pairs, unbalanced, <25 $\Omega$
Connectors rear panel	Lemo Triax female, in pairs, balanced, floating, <25 $\Omega$
Signals	mono, left/right, sound 1/ sound 2
Level of balanced output at rear panel (full scale)	+6 dBm $\pm$ 0.2 dB into 600 $\Omega$
Frequency response (40 Hz to 15 kHz)	$\pm$ 0.5 dB relative to 1 kHz
S/N ratio	>70 dB, unweighted
THD	>70 dB

### Video Distributor EFA-B6

<b>Video output</b>	2 x BNC female on front panel; 2 x BNC female on rear panel; 75 $\Omega$
Return loss (0 to 6 MHz)	$\geq$ 26 dB
Level accuracy	$\leq$ 2%
DC offset of video signal (MPEG2 decoder mode, black level)	0 V
DC offset of video signal (analog TV mode, zero vision carrier)	0 V $\pm$ 20 mV
Decoupling of outputs (level variation at terminated output when switching the other outputs between short circuit and open circuit)	$\leq$ 1%
<b>Quadrature signal output</b>	1 x BNC female on front panel; 1 x BNC female on rear panel; 75 $\Omega$
Return loss (0 to 6 MHz)	$\geq$ 20 dB
Decoupling of outputs (level variation at terminated output when switching the other outputs between short circuit and open circuit)	$\leq$ 1%

### 6 MHz SAW Filter EFA-B11

Ripple in band	0.4 dB pp
Rejection of adjacent channels	>50 dB (> $\pm$ 3.8 MHz); >85 dB (> $\pm$ 5.3 MHz) with High Adj. Chan Power ON

### 8 MHz SAW Filter EFA-B13

Ripple in band	0.8 dB pp
Rejection of adjacent channels	>55 dB ( $\geq$ $\pm$ 4.4 MHz); >90 dB ( $\geq$ $\pm$ 5.3 MHz) with High Adj. Chan Power ON

### 2 MHz SAW Filter EFA-B14

Ripple in band	0.7 dB pp
Rejection of adjacent channels	>45 dB ( $\geq$ $\pm$ 1.3 MHz)

## General data

Display	monochrome LCD (320 x 240), backlit
Interfaces	IEC625-2/IEEE488 bus, RS-232-C, printer (Centronics)
Temperature range	to IEC68-2-1/-2
Rated temperature range/Operating temperature range	+5 $^{\circ}$ C to +45 $^{\circ}$ C/0 $^{\circ}$ C to +50 $^{\circ}$ C
Power supply	100 V to 120 V/220 V to 240 V, +10%/-15% (autoranging), 50 Hz to 60 Hz
Power consumption	EFA 12/60/78: 70 VA, EFA 33/63/89: 75 VA, EFA 33/63/89 + EFA-B3: 90 VA
Dimensions (W x H x D)	435 mm x 147 mm x 460 mm
Weight	approx. 12 kg, depending on options

## Ordering information

<b>ATSC/8VSB Test Receiver</b> <sup>1)</sup> Selective, constellation diagram, MPEG2 data stream output	EFA 50	2067.3004.50
<b>ATSC/8VSB Test Demodulator</b> <sup>1)</sup> Broadband, constellation diagram, MPEG2 data stream output	EFA 53	2067.3004.53
<b>ITU-T J.83/B Test Receiver</b> <sup>1)</sup> Selective, constellation diagram, MPEG2 data stream output	EFA 70	2067.3004.70
<b>ITU-T J.83/B Test Demodulator</b> <sup>1)</sup> Broadband, constellation diagram, MPEG2 data stream output	EFA 73	2067.3004.73
<b>TV Test Receiver, Std. M/N/NTSC/BTSC</b> RF 45 MHz to 860 MHz	EFA 90	2067.3004.90
<b>TV Demodulator, Std. M/N/NTSC/BTSC</b> RF 45 MHz to 1000 MHz	EFA 93	2067.3004.93

<sup>1)</sup> Note: please fill in configuration sheet (available from your local representative or from Rohde & Schwarz website, EFA section) so that your test receiver / demodulator can be tailored to your requirements.

## Options

RF Preselection for demodulators (models 53, 73, 93)	EFA-B3	2067.3627.02
MPEG2 Decoder	EFA-B4	2067.3633.02
Video Distributor (4 video outputs, only models 53, 73, 93)	EFA-B6	2067.3656.02
Residual Picture Carrier Measurement	EFA-B8	2067.3727.02
6 MHz SAW Filter	EFA-B11	2067.3691.00
8 MHz SAW Filter	EFA-B13	2067.3579.03
2 MHz SAW Filter	EFA-B14	2067.3562.00
Digital Demodulator Platform	EFA-B20	2067.3585.02
M/N NTSC/BTSC Demodulator	EFA-B30	2067.4046.02

## Firmware options

DVB-C / J83/A/C (QAM) Firmware (for models 50, 53, 70, 73 or option EFA-B20)	EFA-K21	2067.4000.02
ATSC/8VSB Firmware (for models 60, 63, 70, 73 or option EFA-B20)	EFA-K22	2067.4017.02
J.83/B Firmware (for models 50, 53, 70, 73 or option EFA-B20)	EFA-K23	2067.4023.02
FIR Coefficient Readout Firmware (only for EFA5x or EFA-B20 + EFA-K22)	EFA-K25	2067.4046.02

## Recommended extras

EFA Calibration Values	EFA-DCV	2082.0490.09
EFA-B4 Calibration Values	EFA-DCV	2082.0490.15
19" Adapter	ZZA-93	0396.4892.00
Lemo Triax connector (mono) with connecting cable (open)		2067.7451.00
Service manual		2068.0950.24
Carrying Bag for 19" units, 3 HU, depth 460 mm	ZZT-314	1001.0523.00



# ROHDE & SCHWARZ





## Test Receiver R&S EFA DVB-C – B/G Analog TV – D/K or I Analog TV

Comprehensive analysis/demodulation/monitoring of digital and analog TV signals

- ◆ Standard test receiver
- ◆ High-end test receiver
- ◆ High-end demodulator
- ◆ Multistandard digital and analog platform for terrestrial and CATV applications
- ◆ Application areas: production, monitoring, coverage, service, research and development
- ◆ Comprehensive measurement and monitoring functions
- ◆ Modular design — easy retrofitting of options
- ◆ MPEG2 analyzer/decoder option
- ◆ IEC/IEEE-bus and RS-232-C interface
- ◆ Simple, user-friendly operation



**ROHDE & SCHWARZ**

# The EFA Family

The TV Test Receiver and Demodulator Family EFA offers outstanding performance features and excellent transmission characteristics. The instruments provide high-precision reception and demodulation of vestigial sideband AM signals (analog TV signals) as well as quadrature amplitude modulated DVB signals. They measure a comprehensive range of transmission parameters and are therefore ideal for measurement and monitoring applications in cable networks, TV transmitter stations and development labs.

## The complete EFA family at a glance

### Standard test receivers

- ◆ Model 60: digital TV, DVB-C
- ◆ Model 12: analog TV, standard B/G
- ◆ Model 78: analog TV, standard D/K or I

### High-end test receivers

- ◆ Model 63 incl. option EFA-B3: digital TV, DVB-C
- ◆ Model 33 incl. option EFA-B3: analog TV, standard B/G
- ◆ Model 89 incl. option EFA-B3: analog TV, standard D/K or I

### High-end demodulators

- ◆ Model 63: digital TV, DVB-C
- ◆ Model 33: analog TV, standard B/G
- ◆ Model 89: analog TV, standard D/K or I

### Standard test receiver

- ◆ Model 40: digital TV, DVB-T

### High-end test receiver

- ◆ Model 43 incl. option EFA-B3: digital TV, DVB-T

### High-end demodulator

- ◆ Model 43: digital TV, DVB-T

Data sheet No.  
PD 0757.5514.xx

### Standard test receivers

- ◆ Model 50: digital TV, ATSC/8VSB
- ◆ Model 70: digital TV, ITU-T J.83/B
- ◆ Model 90: analog TV, standard M/N

### High-end test receivers

- ◆ Model 53 incl. option EFA-B3: digital TV, ATSC/8VSB
- ◆ Model 73 incl. option EFA-B3: digital TV, ITU-T J.83/B
- ◆ Model 93 incl. option EFA-B3: analog TV, standard M/N

### High-end demodulators

- ◆ Model 53: digital TV, ATSC/8VSB
- ◆ Model 73: digital TV, ITU-T J.83/B
- ◆ Model 93: analog TV, standard M/N

Data sheet No.  
PD 0757.7017.xx



## Wide variety of models

The TV Test Receiver Family EFA from Rohde & Schwarz is a versatile and high-performance TV test receiver and demodulator platform, which can be optimally configured for any application, whether digital or analog.

Three frontends are available:

- standard selective,
- high-end selective and
- high-end non-selective.

The high-end models have a better signal-to-noise ratio than the standard models and offer excellent intermodulation characteristics. This, coupled with minimum inherent frequency response, guarantees extremely accurate measurements.

### EFA – realtime signal analysis of DVB-C signals

EFA's powerful digital signal processing provides fast and thorough analysis of the received DVB-C signal. Analysis is performed simultaneously with, but independently of, demodulation and decoding. The MPEG2 transport stream is permanently available for decoding as well as for video and audio reproduction.

Due to its realtime analysis capability, the high number of measured values necessary for the complex calculation and display processes are made available for subsequent mathematical/statistical processing in an extremely short and as yet unequalled time. Because of its high-speed data acquisition, the TV Test Receiver EFA is the ideal choice, not only for R&D but also for production environments where short measurement cycles are essential.

The family concept described in the following will help you to find the right EFA model for your application:

- If the application mainly concerns measurements in cable networks or on terrestrial signals, a receiver model that selects the channel to be measured is the appropriate choice. Adjacent-channel signals, which impair measurement results, are filtered out by high suppression. Then, a choice has to be made between the standard selective and the high-end selective version. As with the other criteria, this choice depends on the application.
- Measurements on modulators or TV transmitters, where only one TV signal is involved, are performed with one of the demodulator models with the high-end non-selective frontend, which guarantees extremely low measurement uncertainty without preselection.

The last selection criterion is the TV standard used, and whether it is analog or digital:

- The EFA test receivers can be configured for digital signals to the **DVB-C, ATSC/8VSB, ITU-T J.83/B** standard or for virtually all **analog TV standards**. A wide range of options including a NICAM demodulator (option EFA-B2) and an MPEG2 decoder (option EFA-B4) round off the EFA product line.
- Operation involving a mix of analog and digital channels is becoming more widespread especially in cable networks. This kind of operation is handled by the QAM demodulator option for


**DVB-C (EFA-B20 + EFA-K21)** or **ITU-T J.83/B (EFA-B20 + EFA-K23)**

which adds complete digital measurement functionality to the analog models.

- It is even possible to update to digital terrestrial applications according to the ATSC/8VSB standard using the

**ATSC/8VSB demodulator option (EFA-B20 + EFA-K22)**

### EFA model selection concept

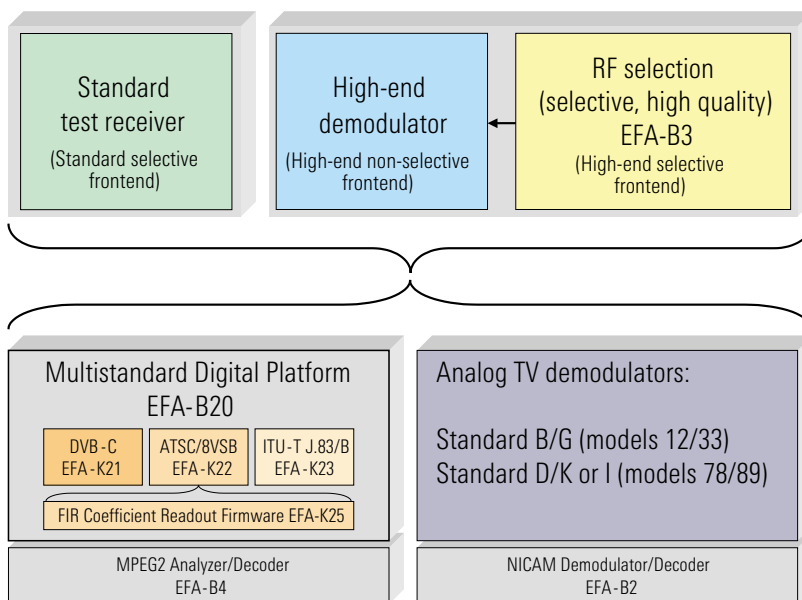

# The EFA Family

## Common to all models

- ◆ In-depth measurement capabilities
- ◆ Simple, user-friendly operation
- ◆ Modular design — easy retrofitting of options
- ◆ Alarm messages for measurement functions, internal storage
- ◆ IEC/IEEE-bus and RS-232-C interface

## Digital options

### MPEG2 analyzer/decoder (option EFA-B4)

- ◆ MPEG2 syntax analysis according to DVB standard
- ◆ SDTV decoding, 625L or 525L supported, SDI output, PAL / SECAM / NTSC video out
- ◆ Error report

### 6 MHz SAW filter (option EFA-B11)

- ◆ Adjacent-channel rejection
- ◆ Meets US requirements

### 7 MHz SAW filter (option EFA-B12)

- ◆ Adjacent-channel rejection
- ◆ Meets Cable Australian requirements

### 8 MHz SAW filter (option EFA-B13)

- ◆ Adjacent-channel rejection
- ◆ Meets European and US standards, recommended for spectrum measurements

## Standard test receiver (EFA models 12/60/78)

- ◆ Selective receiver
- ◆ Typical use in the field where adjacent channels need to be filtered
- ◆ High-end synthesizer with low phase noise
- ◆ Excellent price/performance ratio


## High-end demodulator (EFA models 33/63/89)

- ◆ Wideband input (non-selective receiver), tunable
- ◆ Typically used for transmitter testing
- ◆ Outstanding SNR, excellent intermodulation characteristics
- ◆ High-end synthesizer with extremely low phase noise

## High-end test receiver (EFA models 33/63/89 + option EFA-B3)

- ◆ Outstanding SNR and improved intermodulation characteristics
- ◆ Rejection of image frequency and IF
- ◆ Two additional selective RF inputs (50 Ω and 75 Ω)
- ◆ Extended frequency range from 4.5 MHz to 1000 MHz

## Block diagram of TV Test Receiver EFA

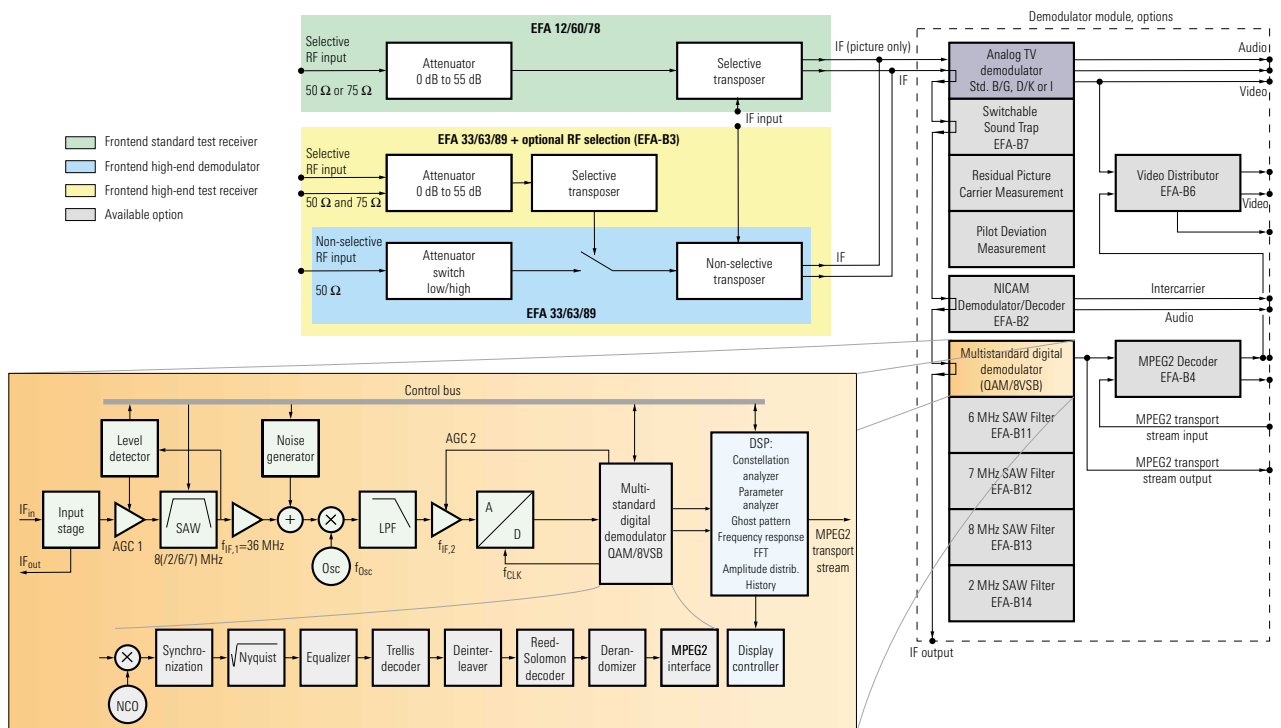

### 2 MHz SAW filter (option EFA-B14)

- ◆ Adjacent-channel rejection
- ◆ Meets channel return requirements (in cable applications)

### Digital demodulator platform (option EFA-B20)

- ◆ Retrofit of analog instruments
- ◆ Multistandard demodulator platform supporting DVB-C demodulation (with EFA-K21), ATSC/8VSB demodulation (with EFA-K22), ITU-T J.83/B demodulation (with EFA-K23)
- ◆ Included in basic EFA 50/53/60/63/70/73 models
- ◆ MPEG2 transport stream output (serial or parallel)
- ◆ General measurement functions for
  - RF input level
  - carrier frequency offset
  - bit rate offset
  - BER (before and after Reed-Solomon)

### DVB-C firmware (option EFA-K21)

- ◆ Analysis, demodulation and monitoring of DVB-C signals according to ETS 300 429 standard
- ◆ Included in basic EFA 60/63 models

### ATSC/8VSB firmware (option EFA-K22)

- ◆ Analysis, demodulation and monitoring of ATSC/8VSB signals according to ATSC Doc. A/53
- ◆ Included in basic EFA 50/53 models
- ◆ Additional SMPTE310M MPEG2 transport stream output

### ITU-T J.83/B firmware (option EFA-K23)

- ◆ Analysis, demodulation and monitoring of American digital cable signals according to ITU-T J.83/B standard
- ◆ Included in basic EFA 70/73 models

### FIR coefficient readout firmware (option EFA-K25)

- ◆ Calculation of FIR filter coefficients for linear precorrection of digital signals
- ◆ Only available for the ATSC/8VSB models

## Analog options

### NICAM demodulator/decoder (option EFA-B2)

- ◆ Demodulation and decoding of signals to NICAM-728 standard
- ◆ I and Q signal output
- ◆ Switchable deemphasis
- ◆ Balanced audio outputs
- ◆ Measurement parameters: bit error ratio, eye height, clock and data jitter

### Video distributor (option EFA-B6)

- ◆ 2 video outputs on front panel
- ◆ 2 video outputs on rear panel
- ◆ 1 additional Q output on front panel

### Switchable sound trap (option EFA-B7)

- ◆ Only available for standard B/G (EFA models 12/33)
- ◆ Allows video bandwidth switchover to 6 MHz

Table of available EFA models & options

Option	Designation	Models ⇨ Order No.	Standard test receivers			High-end demodulators			High-end test receivers			Slot needed
			12	60	78	33	63	89	33	63	89	
			B/G	DVB-C	D/K or I	B/G	DVB-C	D/K or I	B/G	DVB-C	D/K or I	
EFA-B2	NICAM Demodulator/Decoder (B/G or D/K)	2067.3610.02	○	–	○	○	–	○	○	–	○	1
EFA-B2	NICAM Demodulator/Decoder (I)	2067.3610.04	–	–	○	–	–	○	–	–	○	1
EFA-B3	RF Selection	2067.3627.02	–	–	–	○	○	○	◆	◆	◆	1
EFA-B4	MPEG2 Decoder	2067.3633.02	○ <sup>1)</sup>	○	○ <sup>1)</sup>	○ <sup>1)</sup>	○	○ <sup>1)</sup>	–	○	–	1
EFA-B6	Video Distributor	2067.3656.02	–	–	–	○	○ <sup>4)</sup>	○	○	○ <sup>4)</sup>	○	0
EFA-B7	Switchable Sound Trap	2067.3710.02	○	–	–	○	–	–	○	–	–	1
EFA-B11	6 MHz SAW Filter	2067.3691.00	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	0
EFA-B12	7 MHz SAW Filter	2067.3591.00	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	0
EFA-B13	8 MHz SAW Filter	2067.3579.03	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	0
EFA-B14	2 MHz SAW Filter	2067.2562.00	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	○ <sup>1)3)</sup>	0
EFA-B20	Digital Demodulator Platform	2067.3585.02	○ <sup>2)</sup>	✓	○ <sup>2)</sup>	○ <sup>2)</sup>	✓	○ <sup>2)</sup>	○ <sup>2)</sup>	✓	○ <sup>2)</sup>	1
EFA-K21	DVB-C / J.83/A/C (QAM) Firmware	2067.4000.02	○ <sup>1)</sup>	✓	○ <sup>1)</sup>	○ <sup>1)</sup>	✓	○ <sup>1)</sup>	○ <sup>1)</sup>	✓	○ <sup>1)</sup>	0
EFA-K22	ATSC/8VSB Firmware	2067.4017.02	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	0
EFA-K23	J.83/B Firmware	2067.4023.02	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	○ <sup>1)</sup>	0
EFA-K25	FIR Coefficient Readout Firmware	2067.4046.02	○ <sup>5)</sup>	○ <sup>5)</sup>	○ <sup>5)</sup>	○ <sup>5)</sup>	○ <sup>5)</sup>	○ <sup>5)</sup>	○ <sup>5)</sup>	○ <sup>5)</sup>	○ <sup>5)</sup>	0
ZZT-314	Carrying Bag for 19" units, 3 HU	1001.0523.00	○	○	○	○	○	○	○	○	○	0

Each basic unit has three free slots to take up options.

✓ included in basic unit    ◆ must be ordered with basic unit    ○ available    – not applicable

<sup>1)</sup> Can be retrofitted if option EFA-B20 is built in.

<sup>2)</sup> Must be ordered with min. one firmware option (EFA-K21 or EFA-K22 or EFA-K23).

<sup>3)</sup> Max. 3 SAW filters.

<sup>4)</sup> Requires EFA-B4.

<sup>5)</sup> Can be retrofitted if options EFA-B20 and EFA-K22 are built in.



# DVB-C

## EFA models 60/63 – all measurement functions for DVB-C digital CATV standard

Besides the deployment of the worldwide digital terrestrial TV network and the already established digital video broadcasting over satellite, digital cable TV still represents an alternative for many consumers worldwide. Additionally, cable technology provides a return channel within the same physical layer (coax cable), allowing the consumer to send back information to the cable headend for versatile applications (full Internet access, video-on-demand and more). The boundary between data communications and TV networks has never been so narrow!

### EFA 60/63 characteristics

Fully compatible with the DVB-C standard (EN 300 429), the EFA 60/63 models receive, demodulate, decode and analyze all orders of QAM (quadrature amplitude modulated) signals. All key parameters for demodulating the received signal can be automatically or manually selected:

- ◆ 4, 16, 32, 64, 128 or 256 QAM modulation
- ◆ Variable symbol rate for special modulator tests and lab analysis (1 Msymbol/s to 6.999 Msymbol/s)

- ◆ Reed-Solomon error correction
- ◆ Optional SAW filter bandwidths: 6 MHz, 7 MHz, 8 MHz and 2 MHz
- ◆ Input of any IF frequency with the aid of the EFA-B3 option: frequency range continuously tunable from 5 MHz to 1000 MHz
- ◆ Special function: invert spectrum
- ◆ Bit error ratio measurement (before and after Reed-Solomon decoder)
- ◆ Integrated noise generator for measurement of noise margin

### Features

The new test receiver, even the basic version, features a wide range of innovative measurement functions, allowing comprehensive, in-depth signal analysis. In addition to measuring general parameters (Fig. 1) such as bit error ratio (BER), more thorough analysis includes:


- ◆ I/Q constellation diagrams (Fig. 2) with user-selectable number of symbols to be displayed, range: 1 to 999 999 999 symbols
- ◆ Histogram I (Fig. 3) and Q (Fig. 4) with user-selectable number of symbols to be displayed, range: 1 to 999 999 999 symbols

- ◆ I/Q parameters, modulation error ratio (MER), error vector magnitude (EVM), phase jitter and signal-to-noise ratio (Fig. 5)
- ◆ Frequency spectrum (Fig. 6)
- ◆ Complex channel transmission function (Fig. 7)
- ◆ Received echo signals (Fig. 8)
- ◆ Linearity analysis from amplitude distribution histogram and CCDF referred to the RF signal (Figs 9 and 10)
- ◆ History function: long-term monitoring of transmission parameters (Fig. 11)
- ◆ Monitoring window (Fig. 12)
- ◆ Permanent MPEG2 transport stream demodulation (independent from the selected measurement task)
- ◆ Integrated noise generator

Any failures and degradations are immediately visible in the constellation diagram. Effects of interest can be located more precisely by varying the number of symbols represented. The integrated spectral analysis function enables easy examination of the signal type and its spectrum.





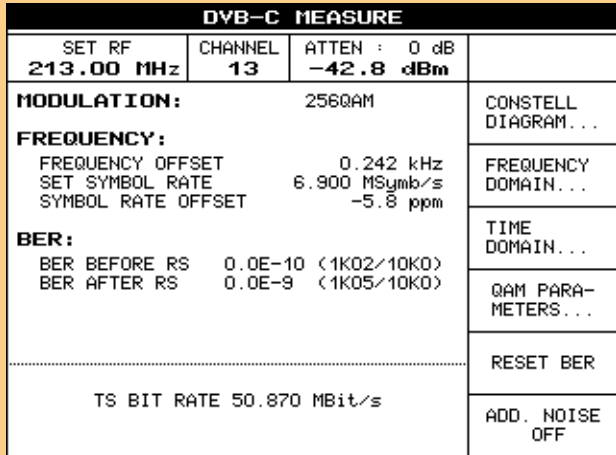


**Fig. 1: Measurement menu**

All parameters for the demodulated DVB-C channel are displayed on a single screen and can be checked at a glance:


- Level of the input signal
- Two BERs (bit error ratio) — before and after Reed-Solomon decoder — provide a fast quality overview of the demodulated signal
- Demodulated symbol rate
- Symbol rate offset

**Hint:** When required, the internal noise generator can be activated to perform END (equivalent noise degradation) or noise margin measurements which are based on the BER measurement.

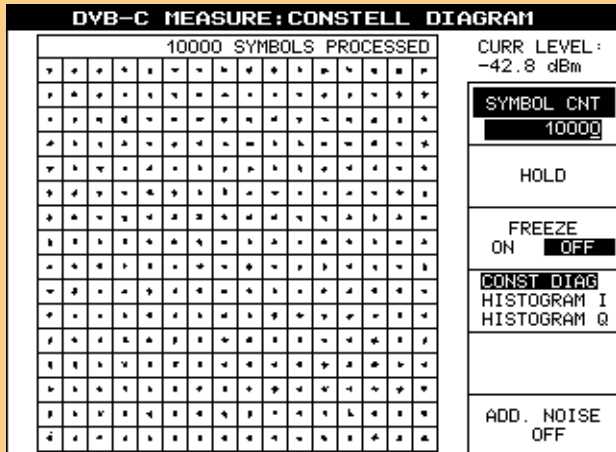

**Fig. 2: Constellation diagram**

The constellation diagram is always the best way to represent digital modulation. It is also the best visual tool for interpreting measurement results such as I/Q amplitude imbalance or carrier suppression. For in-depth analysis, adjustment of the displayed number of symbols is possible (10 000 symbols are shown in this example).

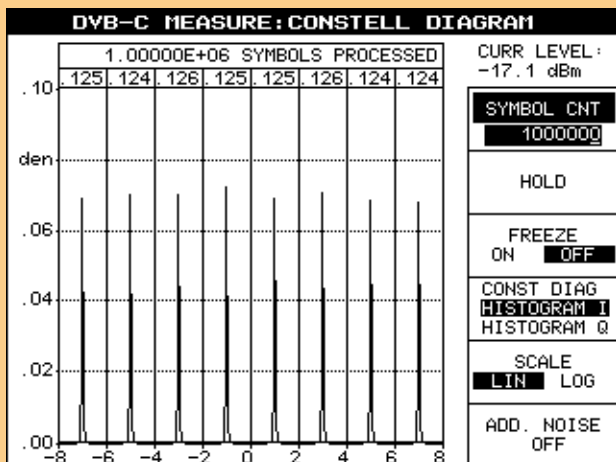

**Fig. 3: Histogram I**

Histogram I represents the distribution of the quadrature amplitude modulated (QAM) signal on the X axis (I for inphase), and can be expressed in a linear or logarithmic scale.

It allows an estimate of the interferer's origin (interferer, Gaussian noise, etc).


Linear scaling is used in this plot.

# DVB-C

**Fig. 4: Histogram Q**

Same representation as Fig. 15 — but referring to the distribution of the Q component projected on the X axis (Q for quadrature).


Logarithmic scaling is used in this plot.

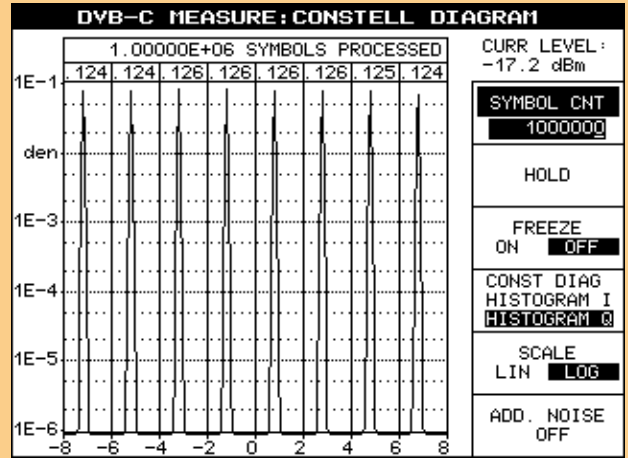

**Fig. 5: QAM modulation parameters**

All QAM parameters are calculated from the constellation diagram:


- I/Q amplitude imbalance
- I/Q phase error
- Carrier suppression
- Phase jitter
- Signal-to-noise ratio
- MER (modulation error ratio), RMS and Min
- EVM (error vector magnitude), RMS and Max

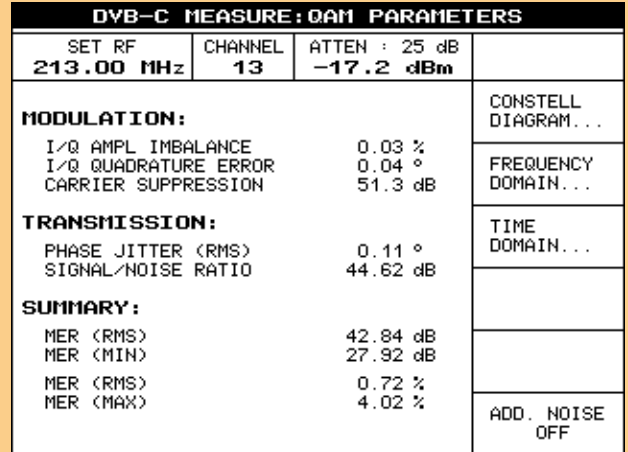


**Fig. 6: Spectrum analysis**

Thanks to this measurement, a separate spectrum analyzer is not required anymore.


Basic spectrum analyzer functions are provided. For example, the start/stop frequency (or center/span) and several detection and averaging modes can be selected.

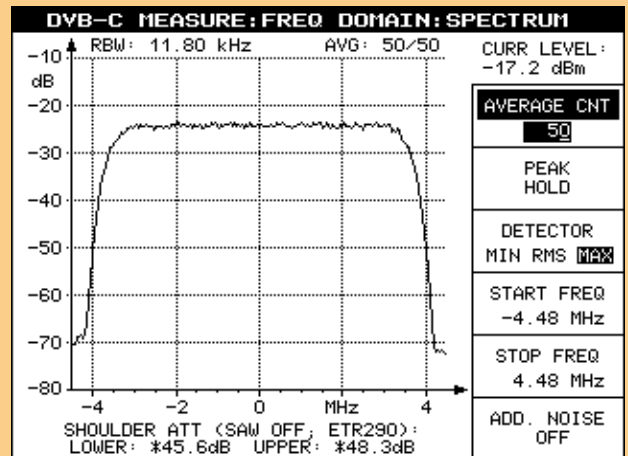

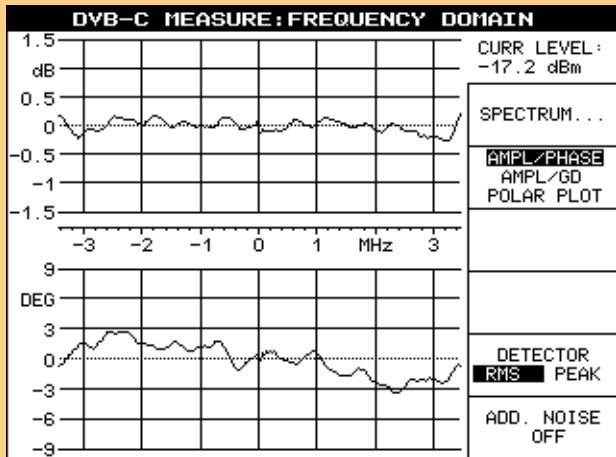


**Fig. 7: Amplitude and phase frequency response**

The coefficients of the equalizer are used to display the amplitude and phase frequency response (shown here), the group delay (not shown here) and the polar plot representation. The polar plot representation — which is the complex representation of amplitude and phase — may help to interpret very short echoes that are difficult to visualize on the echo pattern display.

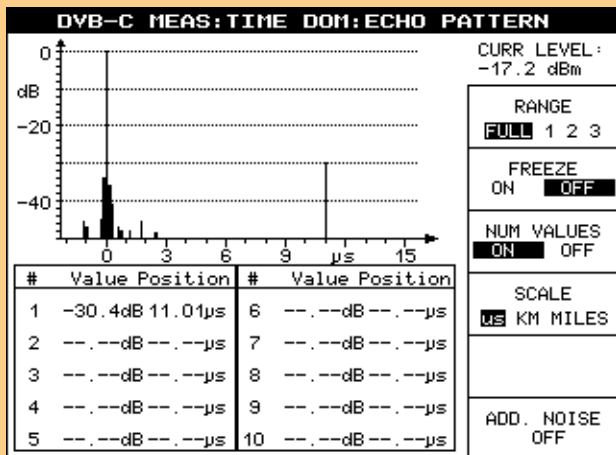

**Fig. 8: Echo pattern**

The echo pattern measurement allows the main QAM signal (0 dB relative), echoes and pre-echoes to be visualized and measured (numeric values). The units of the X axis and of the numeric values can be changed from μs to km or even miles, depending on the application.

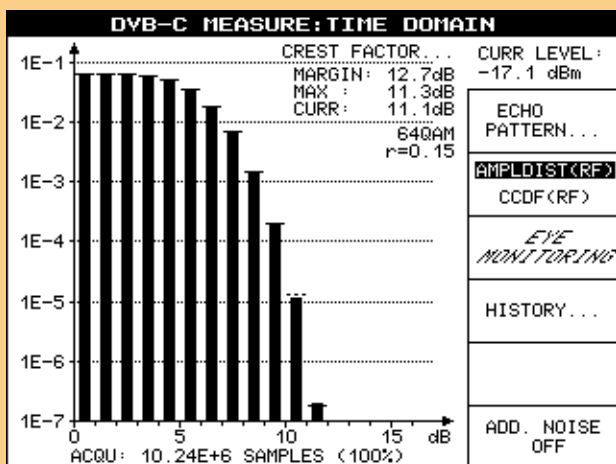


**Fig. 9: Amplitude distribution**

The measurement function for displaying the amplitude distribution or the CCDF (complementary cumulative distribution function) is used to detect nonlinear distortion. The frequency distribution of the QAM signal is divided into several 1 dB windows to determine the amplitude distribution. Information on the crest factor is obtained from the frequency distribution and displayed in the upper right-hand corner of the graph. The reference values are marked by short horizontal lines.

# DVB-C


**Fig. 10: Complementary cumulative distribution function (CCDF)**

In contrast to the amplitude distribution, each trace point indicates how often a certain voltage level is attained or exceeded. The ideal frequencies are displayed as short, horizontal lines at 1 dB intervals (reference values) so that the amplitude distribution of the applied signal can be compared with that of an ideal QAM signal. Any deviation from the ideal distribution is then identified by the deviations of the column heights and the value of the crest factor, for example due to clipping in the modulator output stage.

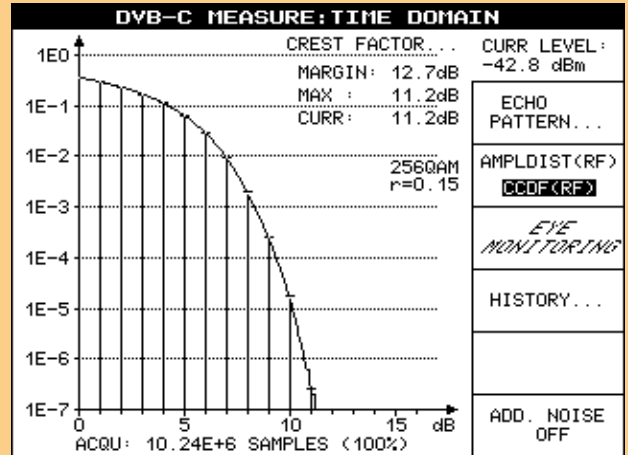

**Fig. 11: History function**

This measurement is just what is required for long-term monitoring of modulators in cable headends. The key parameters (level, synchronization information, MER/dB, MER/%, EVM/%, BER before and after Reed-Solomon decoder, synchronization and MPEG2 transport stream data error) are, therefore, displayed in graphical form. This mode can also display all values numerically (average, max, min, current). BER and level measurements run continuously and are independent of other measurements. The user can configure a monitoring interval from 60 seconds (shown here) to 1000 days.

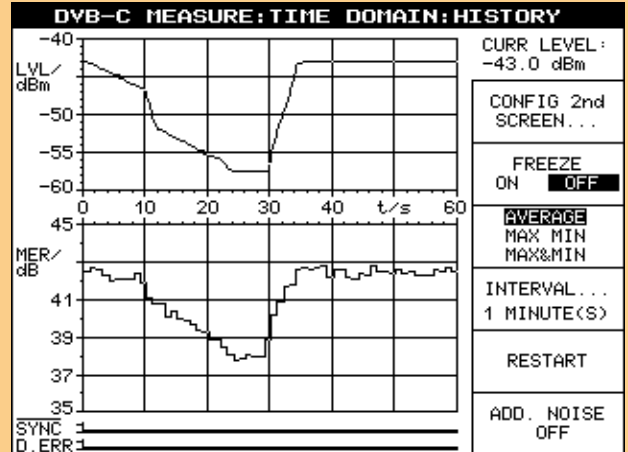

**Fig. 12: Monitoring/Alarm register**

The EFA checks the input level (LV), QAM synchronization (SY), modulation error ratio (ME), error vector magnitude (EV), bit error ratio before Reed-Solomon decoder (BR) and MPEG2 data errors (DE) of the DVB-C signal at a rate of once per second. All alarm messages are stored in the alarm register together with the date and time. Up to 1000 entries can be stored.

DVB-C ALARM							
SET RF	CHANNEL	ATTEN					
213.00 MHz	13	0 dB	-43.0 dBm				
NO	DATE	TIME	ALARM				
			LV	SY	ME	EV BR DE	REGISTER CLEAR...
70	03.08.01	14:58:14	--	--	--	--	THRESHOLD...
71	03.08.01	14:55:42	--	--	--	--	
72	03.08.01	14:55:56	--	--	--	--	
73	03.08.01	14:55:57	--	SY	ME	EV BR DE	CONFIG...
74	03.08.01	14:55:58	--	SY	--	-- BR DE	
75	03.08.01	14:56:00	--	--	--	--	LINE
76	03.08.01	14:56:09	--	SY	ME	EV BR DE	NEWEST MAN
77	03.08.01	14:56:10	--	SY	--	-- BR DE	
78	03.08.01	14:56:11	--	--	--	--	PRINT...
79	03.08.01	14:56:17	--	--	ME	EV BR --	
80	03.08.01	14:57:55	--	--	ME	EV -- --	STATISTICS..

## Typical applications

### EFA for production of modulators

The EFA's analysis capabilities permit in-depth testing of the cable modulator's performance thanks to the outstanding MER/EVM dynamic range, amplitude distribution measurement and spectrum analysis. Another feature is the Equalizer ON/FREEZE/OFF function, which is mandatory during the alignment phase of modulators. Finally, the high accuracy and repeatability of the measurements makes the EFA ideally suited for the production of QAM modulators.

### Cable headend monitoring

The capability of the EFA to handle multi-channel reception with the spectrum measurement and the history functions (graphical measurement representation versus time) permits the unit to monitor cable headends. In addition, an alarm is triggered if one of the selected parameters exceeds the set threshold (all thresholds can be individually configured). Incident level, QAM synchronization, MER (modulation error ratio), EVM (error vector magnitude), BER before Reed-Solomon decoder and MPEG2 TS data error can be checked in realtime independently of other measurements and decoding. If an error occurs, a 1000-line register is available for recording the date, time and description of the event.

### EFA in research and development laboratories

Thanks to the high-quality frontend design, the dynamic range of the modulation error ratio mea-



surement (MER dynamic range better than 41 dB) allows the unit to be used as a reference demodulator in research and development laboratories.

### EFA as a multistandard digital and analog platform

Since the analog standards B/G, D/K and I are still used in cable networks, and cable operators need a future-proof solution for their short- and long-term investment, the

digital DVB-C demodulator option can be implemented in the analog units. It covers all application areas from R&D to cable headend measurements. Furthermore, to protect your investment, the unit can be updated by means of options to demodulate and analyze the ITU-T J.83/B cable and ATSC/8VSB digital terrestrial standards. These unique features make the new EFA family members THE measurement devices for the present and the future.

#### Summary of measurements required for the various DVB-C applications

DVB-C application	Level	BER	I/Q parameters	SNR	Phase jitter	MER/EVM	Constellation diagram Histograms	Frequency spectrum	Amplitude (f) - phase (f) - group delay (f)	Amplitude distribution - CCDF	Echo pattern	History	Alarm	Statistics
Production of modulators	✓	✓	✓	✓	✓	!	✓	✓	✓	✓				
Cable head-end monitoring	✓	✓				✓	✓	✓			✓	!	✓	✓
Research and development	✓	✓	✓	✓	✓	✓	!	✓	✓	✓	✓	✓		
Service	✓	✓	✓			✓	!	✓				✓	✓	✓

! most important measurement

✓ required measurement

# Analog TV

## EFA models 12/33/78/89 – analog TV test receivers

Since the analog terrestrial standards B/G, D/K and I are still commonly in use, and broadcasters need a future-proof solution for their short- and long-term investment, Rohde & Schwarz provides a high-end measurement device that can cover all application areas from R&D to field measurements. This EFA model was created to offer the best performance and the most useful features to test standard B/G, D/K and I transmitters under optimal conditions.

To further protect your investment, the unit can be updated by means of options to demodulate and analyze the digital CATV standards DVB-C (option EFA-K21) and ITU-T J.83/B (option EFA K-23) as well as the ATSC/8VSB digital terrestrial standard (option EFA K-22). These unique features make the new EFA family members THE measurement devices for the present and the future!

### Characteristics of analog EFA models 12/33/78/89

Fully compatible with analog standards, the analog EFA models receive and demodulate most analog TV standards (B/G, D/K and I). All key parameters for demodulating the received signal can be automatically or manually selected:

- ◆ Switchable group delay correction
- ◆ Switchable synchronous detector (5 different modes)
- ◆ Demodulation using intercarrier method
- ◆ Balanced audio outputs
- ◆ Measurement functions for
  - vision/sound carrier spacing (level and frequency)
  - FM sound carrier and pilot deviation
  - Residual Picture Carrier (RPC) or video modulation depth
- ◆ Input of any IF frequency with the aid of the EFA-B3 option: frequency range continuously tunable from 5 MHz to 1000 MHz

### Features

The analog EFA models provide high-precision demodulated baseband signals (vision and sound) for measurements in various applications (TV transmitters, cable headends, coverage measurements, R&D). At the same time, all relevant RF parameters are monitored at high speed and represented in a logical manner (Fig. 13). User-configurable alarm messages permit unattended monitoring of the received signals as well as switch-over to alternative links in the event of a failure.

The high-end demodulator version is used for on-site measurements on TV transmitters. This version offers particularly low-distortion demodulation of the broadcast signal. It is perfectly suited for these types of measurements; its low measurement uncertainty permits optimal alignment as well as permanent quality control of transmitters.

**Fig. 13: Measurement window**

All parameters for the demodulated standard B/G TV channel are displayed on a single screen and can be checked at a glance:

- Vision carrier level
- Video modulation depth
- Sound intercarrier measurements
- Vision/sound level ratio
- Sound 1 & 2 FM deviation
- Pilot decoding

NYQU FM MEASURE			
SET RF	CHANNEL	ATTEN : 15 dB	STANDARD
503.25 MHz	25	84.2 dBuV	B/G
<b>VISION CARRIER:</b>			
LEVEL		84.2 dBuV	
SET RF		503.250000 MHz	
MEASURED RF		503.250000 MHz	
CONTROLLED RF		503.250000 MHz	
VIDEO LEVEL		100 %	
<b>SOUND CARRIER:</b>			
VISION/SOUND1 CARRIER RATIO		12.9 dB	
VISION/SOUND2 CARRIER RATIO		20.1 dB	
INTERCARRIER1 FREQUENCY		5.5345 MHz	
INTERCARRIER2 FREQUENCY		5.7476 MHz	
FM DEVIATION SOUND1		27.2 kHz	
FM DEVIATION SOUND2		31.2 kHz	
FM DEVIATION PILOT AVERAGE		2.54 kHz	
PILOT FREQUENCY		54.688 kHz	
PILOT		DUAL SOUND	

## Specification of intermodulation

### In-channel distortion

In-channel distortion is determined by means of a modulated TV signal with a vision carrier ( $f_{VC}$ ), a colour subcarrier ( $f_{SB}$ ) and a sound carrier ( $f_{SC}$ ). Modulation is chosen such that the vision carrier is lowered by 6 dB, the colour subcarrier by 14 dB and the sound carrier by 10 dB relative to the sync pulse level. The level of the intermodulation product is measured at the video output relative to the black-to-white transition of the video signal. Fig. 14 shows the signals involved and the reference level at the RF.

### Out-of-channel distortion

The effect of signals outside the received channel is described by the 3rd-order intercept point (TOI). For the EFA family, this parameter is specified on the basis of a three-tone measurement with the following signals: a wanted carrier at the receive frequency  $f_{VC}$  and two unwanted carriers 14 MHz and 15 MHz above the receive frequency.

The unwanted frequencies are chosen to be within the bandwidth of the RF selection but outside the bandwidth of the first IF filter. The effect of out-of-channel interference on the receiver can thus reliably be determined. It is assumed that each of the three signals has a level  $P = -33$  dBm. The level of the intermodulation product  $\Delta IM$  1 MHz relative to the wanted carrier is measured (see Fig. 15, measurement at the RF). The 3rd-order intercept point is:

$$TOI/dBm = P/dBm + \frac{\Delta IM/dB}{2} + 3$$

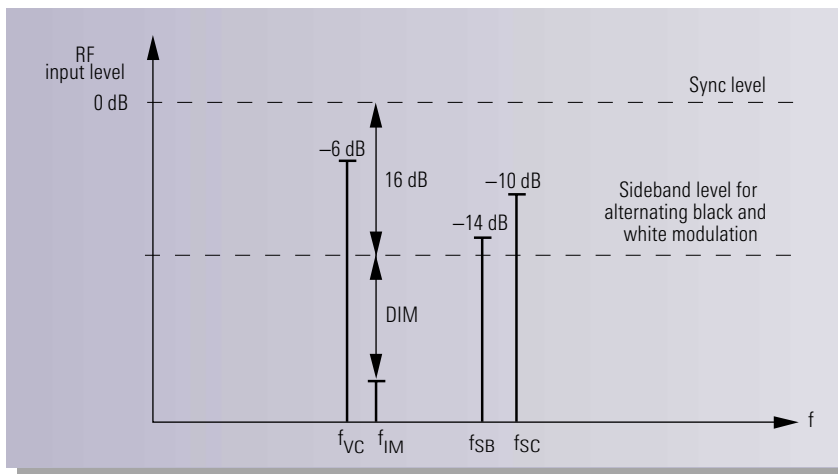


Fig. 14

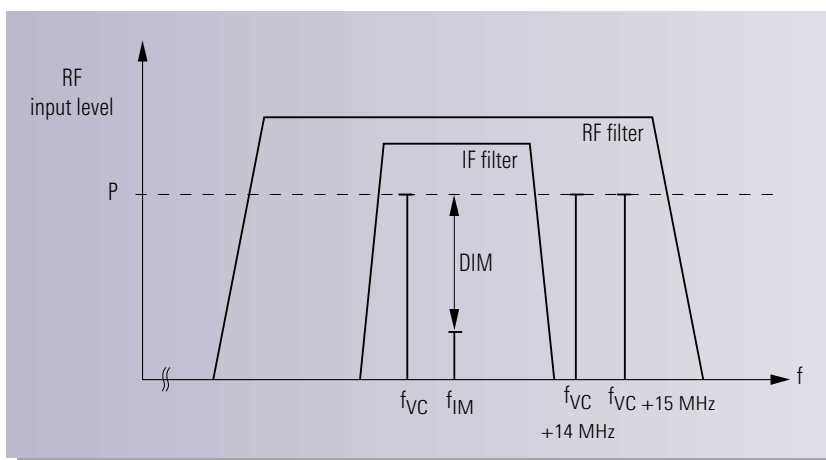


Fig. 15



# Specifications

## DVB-C characteristics (specific to EFA models 60/63 or options EFA-B20 + EFA-K21)

	Standard test receiver	High-end test receiver with option EFA-B3	High-end demodulator
<b>RF input</b>	selective	selective <sup>1)</sup>	non-selective
Connector	50 Ω or 75 Ω, BNC or N female, front or rear panel	50 Ω, N female, rear panel and 75 Ω, BNC female, rear panel	50 Ω, N female, rear panel
Return loss	≥14 dB in channel with 50 Ω connector and input attenuation ≥10 dB ≥12 dB in channel with 75 Ω connector and input attenuation ≥10 dB	≥17 dB (>20 dB typ.) in channel with 50 Ω connector ≥14 dB (>17 dB typ.) in channel with 75 Ω connector	≥30 dB
Frequency range <sup>2)</sup>	48 MHz to 862 MHz	4.5 MHz <sup>3)</sup> to 1000 MHz	45 MHz to 1000 MHz
Level range <sup>4)</sup>	-55 dBm to +20 dBm (low distortion, preamplifier off) -59 dBm to +20 dBm (low noise, preamplifier off) -64 dBm to +13 dBm (low noise, preamplifier on)	-63 dBm to +20 dBm <sup>5)</sup> (normal) -62 dBm to +20 dBm <sup>5)</sup> (low distortion) -65 dBm to +16 dBm <sup>5)</sup> (low noise)	-50 dBm to +20 dBm
Noise figure	12 dB typ. (low noise) 7 dB typ. (low noise, preamplifier on)	7 dB typ. (low noise) <sup>6)</sup> 9 dB typ. (normal) <sup>6)</sup> 11 dB typ. (low distortion) <sup>6)</sup>	
Image frequency rejection	≥70 dB (VHF) and ≥50 dB (UHF)	100 dB	
IF rejection		100 dB	
<b>Local oscillator</b>			
Resolution	1 Hz	1 Hz	1 Hz
Frequency error	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>
Phase noise <sup>7)</sup>	≥50 dB	≥58 dB	≥62 dB <sup>8)</sup>
SSB phase noise (RF=860 MHz)	-82 dBc/Hz typ. at 1 kHz -90 dBc/Hz typ. at 10 kHz	-91 dBc/Hz typ. at 1 kHz -100 dBc/Hz typ. at 10 kHz	-93 dBc/Hz typ. at 1 kHz -106 dBc/Hz typ. at 10 kHz
<b>System performance</b>			
MER	≥40 dB <sup>9)</sup>	≥41 dB <sup>10)</sup>	≥42 dB <sup>11)</sup>
EVM	≤0.66% <sup>9)</sup>	≤0.59% <sup>10)</sup>	≤0.52% <sup>11)</sup>
SNR	≥42 dB <sup>9)</sup>	≥43 dB <sup>10)</sup>	≥44 dB <sup>11)</sup>

<sup>1)</sup> The selective RF inputs of the high-end TV test receiver (with option EFA-B3) are additional to the non-selective RF input of the high-end demodulator. For specifications involving the non-selective RF input, see the high-end demodulator column.

<sup>2)</sup> Center frequency.

<sup>3)</sup> For frequencies < 10 MHz: group delay tilt increases up to 200 ns, amplitude tilt increases up to 0.7 dB pp typ., minimum input level: -30 dBm, SAW filter ON.

<sup>4)</sup> For quasi error-free MPEG2 transport stream, 256 QAM.

<sup>5)</sup> At low input frequencies such as 4.57 MHz: additional tilt ( typ. 0.7 dB pp), minimum input level: -30 dBm, SAW filter ON.

<sup>6)</sup> RF >47.15 MHz.

<sup>7)</sup> FM S/N ratio measured at IF output, referred to ±30 kHz frequency deviation and 500 Hz modulation frequency, deemphasis 50 μs, measured to DIN45405, weighted to CCIR468-3.

<sup>8)</sup> In frequency range 45 MHz to 900 MHz.

<sup>9)</sup> Signal power > -40 dBm.

<sup>10)</sup> Signal power > -43 dBm.

<sup>11)</sup> Signal power > -30 dBm.



## DVB-C characteristics (cont.)

<b>IF input</b>	50 $\Omega$ , BNC female, rear panel
Return loss	$\geq 20$ dB in channel
Center frequency	36 MHz
Level range	-30 dBm to -5 dBm
<b>IF output</b>	50 $\Omega$ , BNC female, rear panel
Return loss	$\geq 20$ dB in channel
Center frequency	36 MHz
Level, regulated	-17 dBm
<b>MPEG2 TS parallel output</b>	LVDS (188 bytes/204 bytes)
<b>MPEG2 TS ASI output</b>	serial MPEG2 transport stream (ASI); 75 $\Omega$
Symbol rate	1 Msymbol/s to 6.999 Msymbol/s
Bandwidth (SAW filter)	2 MHz, 7 MHz, 6 MHz, 8 MHz or SAW filter OFF
Channel correction	self-adapting equalizer, equalizer freeze, equalizer off
<b>Measurements</b>	signal power carrier frequency offset symbol rate offset MPEG2 TS bit rate BER (bit error ratio) before and after Reed-Solomon decoder EVM (error vector magnitude) MER (modulation error ratio) SNR (signal/noise ratio) phase jitter I/Q amplitude imbalance I/Q quadrature error carrier suppression crest factor shoulder attenuation according to ETR290
<b>Graphic displays</b>	constellation diagram histogram I/Q frequency spectrum amplitude frequency response phase frequency response group delay frequency response polar plot amplitude distribution (RF) CCDF (RF) eye monitoring history
<b>Alarm messages</b>	signal power, MPEG2 synchronization, EVM, MER, BER before Reed-Solomon decoder, MPEG2 data error
<b>Storage</b>	alarm message with date and time, up to 1000 messages
<b>Memory for instrument setup storage</b>	0 to 4

Test parameters	Range	Resolution	Error
Signal power	corresponding to level range	0.1 dB	<3 dB, <1 dB typ.
MER dB (modulation error ratio in dB)	18 dB to 30 dB 30 dB to 35 dB	0.1 dB 0.1 dB	$\leq 0.8$ dB $\leq 1.0$ dB
MER % (modulation error ratio in %)	1.9% to 3.2% 3.2% to 12.5%	0.01% 0.01%	$\leq 12\%$ of actual value $\leq 10\%$ of actual value
EVM (error vector magnitude)	1.17% to 2.07% 2.07% to 8.3%	0.01% 0.01%	$\leq 12\%$ of actual value $\leq 10\%$ of actual value
SNR (signal/noise ratio)	18 dB to 30 dB 30 dB to 35 dB	0.1 dB 0.1 dB	$\leq 0.5$ dB $\leq 0.8$ dB
I/Q amplitude imbalance	0.00% to 5.00%	0.01%	$\leq 0.03$ dB
I/Q quadrature error	0.00° to 5.00°	0.01°	$\leq 0.03$ °
Carrier suppression	25 dB to 45 dB 45 dB to 60 dB	0.1 dB 0.1 dB	$\leq 1$ dB $\leq 3$ dB
Carrier frequency offset	$\pm 100$ kHz	1 Hz	$\leq 280$ Hz + 2 ppm x RF
Symbol rate offset	$\pm 150$ ppm	0.1 ppm	<10 ppm, <3 ppm typ.
MPEG TS bit rate	up to 51.600 Mbit/s	1 kbit/s	<1 kbit/s
BER before Reed-Solomon	$1.0 \times 10^{-3}$ to $0.1 \times 10^{-15}$	$0.1 \times 10^{-\text{exponent}}$	–
BER after Reed-Solomon	$1.0 \times 10^{-5}$ to $0.1 \times 10^{-14}$	$0.1 \times 10^{-\text{exponent}}$	–

# Specifications

## Analog TV, model-specific characteristics

	Standard test receivers Models 12/78	High-end test receivers Models 33/89	High-end demodulators Models 33/89
<b>RF input</b>	selective	selective	non-selective
Connector	50 Ω or 75 Ω, BNC or N female, front or rear panel	50 Ω, N female, rear panel and 75 Ω, BNC female, rear panel	50 Ω, N female, rear panel
Return loss	≥14 dB in channel with 50 Ω connector and input attenuation ≥10 dB ≥12 dB in channel with 75 Ω connector and input attenuation ≥10 dB	≥17 dB (>20 dB typ.) in channel with 50 Ω connector ≥14 dB (>17 dB typ.) in channel with 75 Ω connector	≥30 dB
Frequency range (vision carrier)	48 MHz to 860 MHz	5 MHz <sup>1)</sup> to 1000 MHz	45 MHz to 1000 MHz
Level range <sup>2)</sup>	-67 dBm to +13 dBm (normal) -77 dBm to -47 dBm (with preamplifier)	-67 dBm to +21 dBm <sup>3)</sup> (normal) -67 dBm to +21 dBm <sup>3)</sup> (low distortion) -77 dBm to +21 dBm <sup>3)</sup> (low noise)	-41 dBm to +21 dBm
Image frequency rejection	VHF: ≥70 dB <sup>4)</sup> UHF: ≥50 dB <sup>4)</sup>	100 dB <sup>5)</sup>	
IF rejection		100 dB <sup>5)</sup>	
<b>Local oscillator</b>			
Resolution	1 Hz	1 Hz	1 Hz
Frequency error	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>	≤2 x 10 <sup>-6</sup>
Phase noise <sup>6)</sup>	≥50 dB	≥58 dB	≥62 dB <sup>7)</sup>

<sup>1)</sup> For frequencies < 10 MHz: group delay tilt increases up to 200 ns, amplitude tilt increases up to 0.7 dB pp typ., minimum input level: -30 dBm, SAW filter ON; upper sideband.

<sup>2)</sup> Levels are rms values referred to sync pulse.




<sup>3)</sup> In receive frequency range 5MHz to 15 MHz: -41 dBm to 21 dBm.

<sup>4)</sup> Image frequency of vision carrier.

<sup>5)</sup> Applies to both frequency conversions.

<sup>6)</sup> FM S/N ratio measured at IF output, referred to ±30 kHz frequency deviation and 500 Hz modulation frequency, deemphasis 50 μs, measured to DIN45405, weighted to CCIR468-3.

<sup>7)</sup> In receive frequency range 45 MHz to 900 MHz.

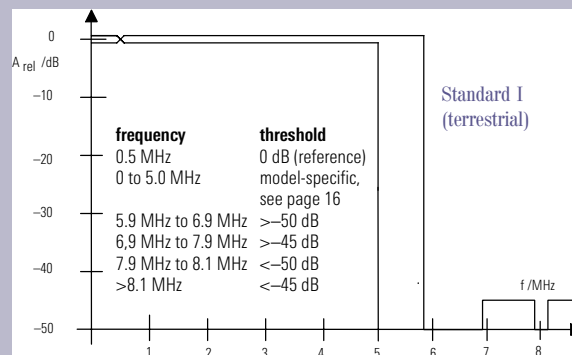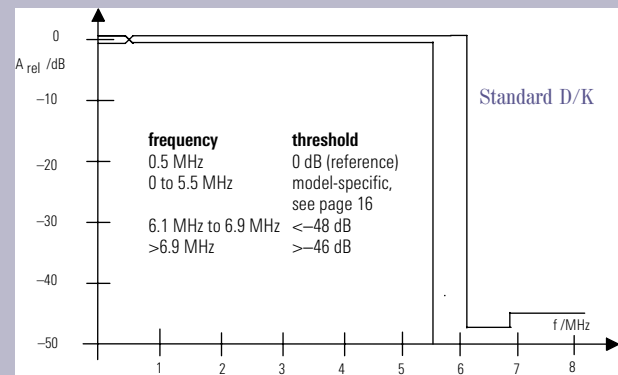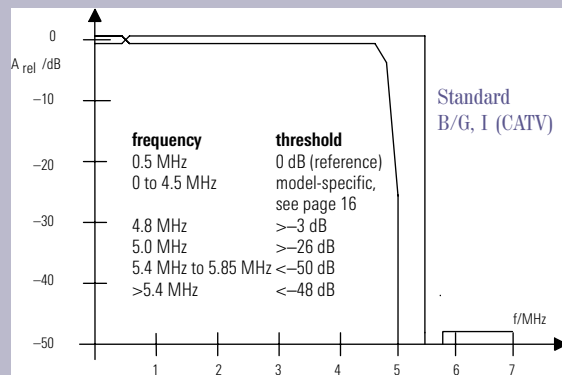

Tolerance masks of EFA for total amplitude characteristic (RF, IF, VF)

## Analog TV, model-specific characteristics (continued)

	Standard test receivers Models 12/78	High-end test receivers Models 33/89	High-end demodulators Models 33/89
<b>Video demodulation characteristics</b>			
<b>Noise voltage</b> , ref. to b/w transition	$P_{RF} \geq -33$ dBm, 0 dB input attenuation	$P_{RF} = -33$ dBm, 0 dB input attenuation	$P_{RF} \geq -1$ dBm
$S/N_{rms}$ unweighted			$\geq 60$ dB typ. 63 dB
$S/N_{rms}$ weighted to CCIR Rec. 567	$\geq 60$ dB typ. 64 dB (low noise)	$\geq 64$ dB typ. 66 dB (low noise)	$\geq 67$ dB typ. 70 dB
	$\geq 57$ dB typ. 59 dB (low distortion)	$\geq 63$ dB typ. 65 dB (normal)	
		$\geq 62$ dB typ. 64 dB (low distortion)	
Signal/hum <sub>peak</sub>	$\geq 52$ dB	$\geq 52$ dB	$\geq 52$ dB
<b>Linear distortion</b>			
Amplitude frequency response	reference: 0.5 MHz	reference: 0.5 MHz	reference: 0.5 MHz
DC to colour subcarrier	$\leq 0.5$ dB	$\leq 0.35$ dB	$\leq 0.25$ dB
Additional ripple through SAW filter	$\leq 0.1$ dB	$\leq 0.1$ dB	$\leq 0.1$ dB
Group delay response	reference: 0.1 MHz	reference: 0.1 MHz	reference: 0.1 MHz
With constant group delay	$\leq 20$ ns	$\leq 15$ ns	$\leq 12$ ns
With group delay dep. on TV std.	see group-delay table	see group-delay table	see group-delay table
Additional ripple through SAW filter	$\leq 10$ ns	$\leq 10$ ns	$\leq 10$ ns

Frequency/MHz	B/G							D/K					I	K1
	General	Sweden	Norway	Denmark	Australia	General/2 (reduced to 50%)	New Zealand	CCIR Report 308	OIRT TK-III-830	OIRT GOST 20532-75	GOST 20532-83	CSFR	SABC TVT 12.2	
	Group delay/ns													
0.10	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0.25	-5 ±Δ	0 ±Δ	0 ±Δ	-5 ±Δ		-2.5 ±Δ		-5 ±Δ		-5 ±Δ			0 ±Δ	0 ±Δ
0.50		0 ±Δ	0 ±Δ							-10 ±Δ	-8 ±Δ		0 ±Δ	0 ±Δ
1.00	-53 ±Δ	0 ±Δ	0 ±Δ	-53 ±Δ	-30 ±Δ	-26.5 ±Δ		-53 ±Δ	-40 ±Δ	-40 ±Δ	-40 ±Δ	-40 ±Δ	0 ±Δ	0 ±Δ
1.50		0 ±Δ	0 ±Δ							-70 ±Δ			0 ±Δ	0 ±Δ
2.00	-90 ±Δ	0 ±Δ	0 ±Δ	-75 ±Δ	-60 ±Δ	-45 ±Δ		-87 ±Δ	-75 ±Δ	-80 ±Δ	-85 ±Δ	-85 ±Δ	0 ±Δ	0 ±Δ
2.25		0 ±Δ	0 ±Δ				-60 ±Δ						0 ±Δ	0 ±Δ
3.00	-75 ±Δ	0 ±Δ	0 ±Δ	-75 ±Δ	-40 ±Δ	-37.5 ±Δ	-60 ±Δ	-85 ±Δ	-90 ±Δ	-80 ±Δ	-92 ±Δ	-90 ±Δ	0 ±Δ	0 ±Δ
3.50		0 ±Δ			0 ±Δ								0 ±Δ	0 ±Δ
3.58		0 ±Δ											0 ±Δ	0 ±Δ
3.60		0 ±Δ	20 ±Δ										0 ±Δ	0 ±Δ
3.75	0 ±Δ					0 ±Δ	0 ±Δ						0 ±Δ	0 ±Δ
3.80				0 ±Δ									0 ±Δ	0 ±Δ
4.00			50 ±20					-50 ±20	-70 ±20	-40 ±20	-60 ±20	-60 ±20	0 ±Δ	0 ±Δ
4.43	170 ±20	175 ±20	170 ±20	170 ±20	170 ±20	85 ±20	170 ±20	0 ±20		0 ±20	-25 ±20	-25 ±20	40 ±20	15 ±20
4.70											0 ±20	0 ±20		
4.80	400 ±40	400 ±40	350 ±40	400 ±40	260 ±40	200 ±40	400 ±40						100 ±40	
5.00								90 ±20	0 ±20	80 ±20		70 ±20		90 ±20
5.50									90 ±20		260 ±40			

High-end demodulator: Δ = 12 ns  
 High-end test receiver: Δ = 15 ns  
 Standard test receiver: Δ = 20 ns

*Group delay depending on TV standard*

Certified Environmental System  
**ISO 14001**  
 REG. NO 1954

Certified Quality System  
**ISO 9001**  
 DQS REG. NO 1954

# Specifications

## Analog TV, model-specific characteristics (continued)

Video demodulation characteristics (continued)	Standard test receivers Models 12/78	High-end test receivers Models 33/89	High-end demodulators Models 33/89
<b>Transient response</b>			
2T pulse k factor	≤1%	≤1%      typ. 0.6%	≤1%      typ. 0.6%
2T pulse amplitude error			≤2%      typ. 1%
20T pulse amplitude error			≤3% (TV standards B/G, D/K, I)
12.5T pulse amplitude error			≤5% (TV standard M/N)
Chrominance/luminance gain			≤3%
Chrominance/luminance delay	≤20 ns (with constant group delay) ≤20 ns (with group delay dep. on TV std.)	≤15 ns (with constant group delay) ≤20 ns (with group delay dep. on TV std.)	≤12 ns (with constant group delay) ≤20 ns (with group delay dep. on TV std.)
Tilt, 10/75% modulation	≤1% (15 kHz squarew. signal, $T_{rise}$ 200 ns)	≤1% (15 kHz squarew. signal, $T_{rise}$ 200 ns)	≤1% (0.25 Hz squarew. signal, $T_{rise}$ 2 μs) ≤1% (50 Hz squarew. signal, $T_{rise}$ 2 μs) ≤1% (15 kHz squarew. signal, $T_{rise}$ 200 ns)
<b>Nonlinear distortion</b>			
Luminance nonlinearity	≤2%      typ. 0.3%	≤2%      typ. 0.3%	≤2%      typ. 0.4%
Differential gain	≤2%      typ. 0.3%	≤2%      typ. 0.3%	≤2%      typ. 0.4%
Differential phase	≤1°      typ. 0.4°	≤1°      typ. 0.4°	≤1°      typ. 0.5°
Intermodulation in channel, referred to b/w transition	≥52 dB      typ. 56 dB (low noise) ≥62 dB      typ. 66 dB (low distortion)	≥57 dB      typ. 61 dB (normal) ≥52 dB      typ. 56 dB (low noise) ≥62 dB      typ. 66 dB (low distortion)	≥55 dB
3rd-order intercept point; 0 dB attenuation	≥0 dBm      (low noise) ≥5 dBm      (low distortion)	≥10 dBm      (normal) ≥14 dBm      (low distortion)	

## Characteristics common to all analog models

<b>IF input</b>		50 Ω, BNC female, rear panel
Vision carrier frequency		
TV standards B/G, I, D/K		38.9 MHz
Return loss in channel		≥30 dB
Level range <sup>1)</sup>		-13 dBm to 4 dBm
Crosstalk attenuation, RF/IF input		≥75 dB
<b>IF output</b>		50 Ω, BNC female, rear panel
Return loss in channel		≥20 dB
Vision carrier level <sup>1)</sup> , regulated		-7 dBm
Input for external zero reference		75 Ω, BNC female, rear panel
Control voltage		>1 V
Delay of carrier blanking relative to control pulse		<3 μs
<b>Video selectivity</b>		
In-channel sound carrier suppression		
TV standard	B/G, I, D/K	≥50 dB ≥48 dB
Adjacent-channel vision carrier suppression		
TV standard	B/G, I (CATV) I (terrestrial) D/K	≥50 dB ≥48 dB ≥46 dB

<sup>1)</sup> Levels are rms values referred to sync pulse

## Characteristics common to all analog models (continued)

<b>Video outputs</b>	75 $\Omega$ , BNC female, front panel and 75 $\Omega$ , BNC female, rear panel
Return loss (0 to 6 MHz)	$\geq 26$ dB
Decoupling of outputs	
Level variation at terminated output with other output short-circuited or open	$\leq 1\%$
Video level, adjustable	1 V pp $\pm 3$ dB
Level inaccuracy	$\leq 2\%$
Resolution of level control	10 mV
DC offset with carrier clamped to zero level	0 V $\pm 20$ mV
Quadrature signal output of sync demodulator	75 $\Omega$ , BNC female, on rear panel
Return loss (0 to 6 MHz)	$\geq 20$ dB
Gain difference, referred to nominal video output level	$\leq 0.5$ dB
<b>Synchronous demodulation</b>	
Phase error of switching carrier	$\leq 1^\circ$
Vision carrier phase control	continuous, sampled (switchable)
Time constant of PLL for keyed phase control	normal, slow (switchable)
Time constant of PLL for continuous phase control	fast, normal, slow (switchable)
<b>Sound demodulation</b>	intercarrier method
<b>Audio outputs</b>	Lemo Triax female, in pairs rear panel: balanced, $Z < 35 \Omega$ front panel: unbalanced, $Z < 10 \Omega$
Output signal	M1/L and M2/R
Permissible load	$\geq 300 \Omega$ // $\leq 5000$ pF
Audio level, adjustable	
Reference frequency deviation	$\pm 30$ kHz or $\pm 50$ kHz, selectable
Setting range for $\pm 30$ kHz reference frequency deviation	-3 dBm to +10 dBm
Setting range for $\pm 50$ kHz reference frequency deviation	+2 dBm to +10 dBm
Resolution of level control	0.1 dB
Level accuracy, $f_{mod} = 500$ Hz	$\leq 0.2$ dB
Amplitude frequency response, 40 Hz to 15 kHz, referred to 500 Hz	$\leq \pm 0.3$ dB
Deemphasis	50 $\mu$ s, can be switched off
Distortion at $\pm 50$ kHz frequency deviation, deemphasis on	$\leq 0.5\%$
<b>S/N ratio (intercarrier method)</b>	
referred to $\pm 30$ kHz frequency deviation and 500 Hz modulation frequency, measured to DIN45405, weighted to CCIR468-3; the channel not being measured is without signal	
Vision modulation: all-black picture	$\geq 55$ dB
Vision modulation: test pattern	$\geq 48$ dB
Vision modulation: sinewave, 10% to 75% modulation	$\geq 46$ dB
Vision modulation: sinewave, 242 kHz $\pm 15$ kHz, 10% to 75% modulation	$\geq 42$ dB
Stereo crosstalk, 40 Hz to 15 kHz referred to $\pm 30$ kHz frequency deviation and 500 Hz modulation frequency, deemphasis on	$\geq 40$ dB
Channel crosstalk, 40 Hz to 15 kHz referred to $\pm 30$ kHz frequency deviation, deemphasis on, measured with $\pm 30$ kHz spurious FM	$\geq 74$ dB
<b>Alarm message</b>	
Vision carrier level, RF offset, TV synchronization, vision/FM sound carrier level ratios, vision/FM sound carrier frequency spacings, FM pilot deviation, max. FM deviations, min. FM deviations	

## Test parameters, analog TV

	Measurement range	Resolution	Error
Vision carrier power or voltage in $\mu$ V/mV, dB $\mu$ V, dBmV, dBm, dB $\mu$ W, dBpW			
Standard test receivers	-77 dBm to 13 dBm	0.1 dB	$\leq 3$ dB
High-end test receivers	-77 dBm to 21 dBm	0.1 dB	$\leq 3$ dB
High-end demodulators	-41 dBm to 21 dBm	0.1 dB	$\leq 2$ dB
Video level	50% to 150%	1%	$\leq 2\%$



# Specifications

## Test parameters, analog TV (continued)

	Measurement range	Resolution	Error
Vision carrier frequency	frequency range depending on EFA model	20 Hz	$\leq 2 \times 10^{-6}$
Vision/FM sound carrier 1 level ratio	-23 dB to -7 dB	0.1 dB	$\leq 2$ dB
Vision/FM sound carrier 2 level ratio	-30 dB to -14 dB	0.1 dB	$\leq 2$ dB
Vision/FM sound carrier 1 frequency spacing	nominal IC frequency $\pm 50$ kHz	100 Hz	$\leq 200$ Hz <sup>1)</sup>
Vision/FM sound carrier 2 frequency spacing	nominal IC frequency $\pm 50$ kHz	100 Hz	$\leq 200$ Hz s <sup>1)</sup>
FM sound carrier deviation	0 kHz to 80 kHz	100 Hz	$\leq 3\% \pm 200$ Hz <sup>2)</sup>
FM pilot carrier deviation (average)	1 kHz to 5 kHz	10 Hz	$\leq 5\%$
FM pilot carrier deviation (peak value)	1 kHz to 10 kHz	10 Hz	$\leq 5\%$
Pilot frequency	pilot frequency $\pm 300$ Hz	2 Hz	$\leq 2$ Hz
Residual AM	0% to 30%	0.1%	0.5%

<sup>1)</sup> With unmodulated sound carrier

<sup>2)</sup> Without vision modulation

## Options

### NICAM Demodulator EFA-B2

Standard		NICAM-728
NICAM IF carrier frequency	Standard B/G	33.05 MHz
	Standard I	32.348 MHz
Vision/NICAM carrier level ratio		15 dB to 31 dB
FM sound carrier suppression		$\geq 40$ dB
Frequency response deviation from standard curve up to 182 kHz		$\leq 1$ dB
Group delay up to 120 kHz		$\leq 150$ ns
Group delay up to 182 kHz		$\leq 200$ ns
<b>NICAM intercarrier input</b>		50 $\Omega$ , BNC female, rear panel
NICAM carrier frequency	Standard B/G	5.85 MHz
	Standard I	6.552 MHz
Return loss		$\geq 20$ dB
Level range		-22 dBm to -5 dBm
<b>NICAM-728 data input</b>		75 $\Omega$ , TTL, BNC female, rear panel
<b>NICAM-728 clock input</b>		75 $\Omega$ , TTL, BNC female, rear panel
<b>QPSK I output</b>		BNC female, rear panel
Output impedance		100 $\Omega$
Permissible load		$\geq 1$ k $\Omega$ // $\leq 1$ nF
Level		0.8 V pp
<b>QPSK Q output</b>		BNC female, rear panel
Output impedance		100 $\Omega$
Permissible load		$\geq 1$ k $\Omega$ // $\leq 1$ nF
Level		0.8 V pp
<b>Clock/2 output</b>		75 $\Omega$ , TTL, BNC female, rear panel
<b>NICAM-728 data output</b>		75 $\Omega$ , TTL, BNC female, rear panel
<b>NICAM-728 clock output</b>		75 $\Omega$ , TTL, BNC female, rear panel
<b>Audio output, balanced</b>		Lemo Triax female, pair of connectors, rear panel
Output impedance		$< 35$ $\Omega$
Permissible load		$\geq 300$ $\Omega$ // $\leq 5$ nF
Level at 600 $\Omega$ , $f_{mod} = 400$ Hz		0 dBm $\pm 0.2$ dB

<b>Audio output, unbalanced</b>		Lemo Triax female, pair of connectors, front panel
Output impedance		<35 $\Omega$
Permissible load		$\geq 300 \Omega // \leq 5 \text{ nF}$
Level at 600 $\Omega$ , $f_{\text{mod}} = 400 \text{ Hz}$		0 dBm
<b>NICAM additional information</b>		25-contact SUB-D, TTL, rear panel
Permissible load		$\geq 1 \text{ k}\Omega // \leq 100 \text{ pF}$
– Control bits		C0 to C4
– Additional data		A0 to A10
– Frame sync		
– Additional data sync		
– Bit errors		parity bit evaluation
<b>Audio demodulation characteristics</b>		
Frequency response:	30 Hz to 14.7 kHz	$\leq 0.2 \text{ dB}$
	14.7 kHz to 15 kHz	$\leq 0.3 \text{ dB}$
Phase difference between channels (stereo)		$\leq 3^\circ$
Distortion		$\leq 0.15\%$
Crosstalk		$\leq -80 \text{ dB}$
S/N ratio (empty channel, referred to full-scale level)		
unweighted		$\geq 80 \text{ dB}$
weighted (CCIR 468-3)		$\geq 80 \text{ dB}$
Aliasing products:	30 Hz to 14.7 kHz	$\leq -55 \text{ dB}$
	14.7 kHz to 15 kHz	$\leq -35 \text{ dB}$
Other spurious lines (referred to full-scale level)		$\leq -50 \text{ dB}$
<b>Additional alarm messages</b>		
Vision/NICAM sound carrier power ratio, NICAM intercarrier level, eye height, BER, data jitter; loss of: NICAM data/NICAM clock, frame sync, headroom		

#### Additional test parameters

	Measurement range	Resolution	Error
Vision/NICAM carrier level ratio	13 dB to 34 dB	0.1 dB	$\leq 1.5 \text{ dB}$
Level (intercarrier input)	-24 dBm to -3 dBm	0.1 dB	$\leq 1.5 \text{ dB}$
Eye height	10% to 100%	1%	$\leq 2 \times (100 / \text{displayed value})\% ^{1)}$
	Measurement range	Resolution	Error
BER	$0 \times 10^{-9}$ to $< 1 \times 10^{-5}$	$0.2 \times 10^{-\text{exponent}}$	–
	$1 \times 10^{-5}$ to $1 \times 10^{-2}$	$0.1 \times 10^{-\text{exponent}}$	–
Clock or data jitter	0 Hz to 50 Hz	1 Hz	$\leq 20\% \pm 2 \text{ Hz} ^{2)}$

<sup>1)</sup> Reference: 100%; vision modulation: all-black picture

<sup>2)</sup> Valid for jitter frequency 50 Hz to 60 Hz; 3 dB bandwidth: 10 Hz to 120 Hz


#### RF Selection EFA-B3

RF selection for High-End Demodulator Models EFA 63/33/89. Two selective RF inputs are available on the rear with 50  $\Omega$  and 75  $\Omega$  impedance in addition to the non-selective RF input of the high-end demodulator. Demodulation of variable IFs up to 50 MHz via the selective RF inputs.

<b>IF inputs</b>		selective
Connectors		50 $\Omega$ , N female, rear panel and 75 $\Omega$ , BNC female, rear panel
Return loss		17 dB (>20 dB typ.) in channel with 50 $\Omega$ connector 14 dB (>17 dB typ.) in channel with 75 $\Omega$ connector
Frequency range		4.5 MHz <sup>1)</sup> to 1000 MHz
Level range		see high-end test receiver column of relevant demodulator mode
<b>System performance</b>		
Noise figure		7 dB typ. (low noise) 9 dB typ. (normal) 11 dB typ. (low distortion)
Image frequency rejection		100 dB
IF rejection		100 dB

<sup>1)</sup> For frequencies < 10 MHz: group delay tilt increases up to 200 ns, amplitude tilt increases up to 0.7 dB pp typ., minimum input level: -30 dBm, SAW filter ON.

## RF Selection EFA-B3 (continued)

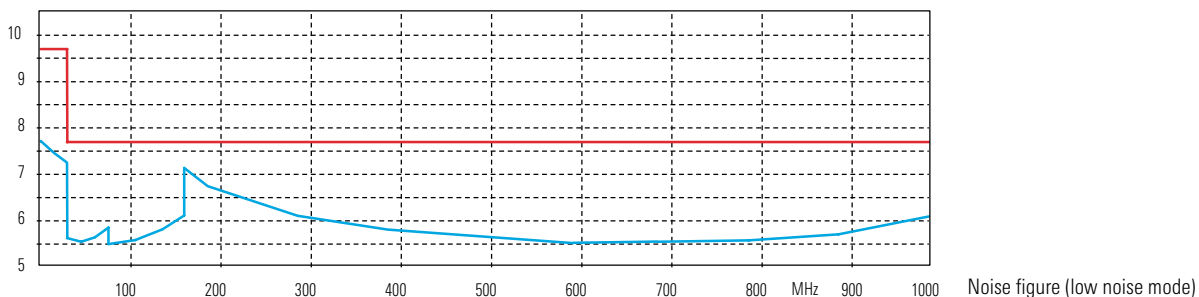

## MPEG2 Decoder EFA-B4

Simultaneous monitoring of all signals in transport stream. Realtime measurement functions according to test specifications for DVB systems (ETR290): priorities 1, 2 and 3.

<b>System performance</b>	
Transport stream	according to ISO/IEC 1-13818
Data rate of transport stream	up to 54 Mbit/s
Length of data packets	188/204 bytes, automatic switchover
<b>External TS ASI input</b>	
Asynchronous serial MPEG2 transport stream	270 Mbit/s
Level	200 mV pp to 1 V pp
<b>Video signal output (CCVS)</b>	
Level	1 V pp $\pm 1\%$
DC offset (black level)	0 V
<b>Video serial digital output (ITU-R601)</b>	
<b>Audio signal output</b>	
Signals	Lemo Triax connectors, in pairs; front panel: unbalanced, $Z < 10 \Omega$ rear panel: balanced, floating, $Z < 25 \Omega$
Level of balanced output at rear panel (full scale)	left/right, sound 1/sound 2, mono
Frequency response (40 Hz to 15 kHz)	+6 dBm $\pm 0.2$ dB into 600 $\Omega$
S/N ratio	$\leq 0.5$ dB, referred to 1 kHz
THD	>70 dB, unweighted
	>70 dB

## Video Distributor EFA-B6

The video distributor option provides four decoupled video outputs (CCVS) for analog and digital TV. Option EFA-B4 is required for digital TV.

<b>Video output</b>	2 x BNC female front panel; 2 x BNC female rear panel
Impedance	75 $\Omega$
Return loss (0 MHz to 6 MHz)	$\geq 26$ dB
Level accuracy	$\leq 2\%$
DC offset of video signal (MPEG2 decoder mode, black level)	0 V
DC offset of video signal (analog TV mode, zero vision carrier)	0 V
Decoupling of outputs (level variation at terminated output when switching the other outputs between short circuit and open circuit)	$\leq 1\%$
<b>Quadrature signal outputs</b>	
(quadrature signal of sync demodulator in Nyquist demodulator mode)	BNC female, front and rear panel
Impedance	75 $\Omega$
Return loss (0 MHz to 6 MHz)	$\geq 20$ dB
Decoupling of outputs (level variation at terminated output when switching the other outputs between short circuit and open circuit)	$\leq 1\%$

## Switchable Video Bandwidth EFA-B7 (for video bandwidth switchover to 6 MHz for TV standard B/G)

	Standard test receivers	High-end test receivers	High-end demodulators
Amplitude frequency response	reference: 0.5 MHz	reference: 0.5 MHz	reference: 0.5 MHz
0 Hz to 5 MHz	≤0.5 dB	≤0.35 dB	≤0.25 dB
5 MHz to 5.5 MHz	≤0.7 dB	≤0.5 dB	≤0.45 dB
Additional ripple through SAW filter	≤0.1 dB	≤0.1 dB	≤0.1 dB
Group delay response	reference: 0.1 MHz	reference: 0.1 MHz	reference: 0.1 MHz
With constant group delay			
0 Hz to 5.5 MHz	≤20 ns	≤15 ns	≤12 ns
With group delay depending on TV standard	see table on page 17	see table on page 17	see table on page 17
Additional ripple through SAW filter	≤15 ns	≤15 ns	≤15 ns

### 6 MHz SAW Filter EFA-B11

This filter is recommended for rejection of adjacent channels in systems with 6 MHz channel spacing.

Ripple in band	0.4 dB pp
Rejection of adjacent channels	50 dB (>±3.8 MHz) 85 dB (>±6 MHz) with High Adj. Chan Power ON

### 7 MHz SAW Filter EFA-B12

This filter is recommended for rejection of adjacent channels in systems with 7 MHz channel spacing.

Ripple in band	0.7 dB pp
Rejection of adjacent channels	>55 dB (>±4.0 MHz) >90 dB (>±5.3 MHz) with High Adj. Chan Power ON

### 8 MHz SAW Filter EFA-B13

This filter is recommended for shoulder attenuation measurement according to FCC recommendation and for rejection of adjacent channels in systems with 8 MHz channel spacing.

Ripple in band	0.8 dB pp
Rejection of adjacent channels	50 dB (>±4.8 MHz) 90 dB (>±5.3 MHz) with High Adj. Chan Power ON

### 2 MHz SAW Filter EFA-B14

This filter is recommended for rejection of adjacent channels in systems with 2 MHz channel spacing.

Ripple in band	0.7 dB pp
Rejection of adjacent channels	45 dB (>±1.3 MHz)

### Digital Demodulator Platform EFA-B20

Supports ATSC/8VSB demodulation (for specifications see ATSC/8VSB characteristics of EFA models 50/53), ITU-T J.83/B demodulation (for specifications see ITU-T J.83/B characteristics of EFA models 70/73) and DVB-C (ITU-T J.83/A/C) demodulation.

#### General data

Display	monochrome LCD (320 x 240), backlit
Interfaces	IEC625-2/IEEE488 bus, RS-232-C, printer (Centronics)
Temperature range	to IEC68-2-1/-2
Rated temperature range	+5 °C to +45 °C
Operating temperature range	0 °C to +50 °C
Power supply	100 V to 120 V/220 V to 240 V; +10%/-15% (autoranging), 50 Hz to 60 Hz
Power consumption	EFA 12/60/78: 70 VA EFA 33/63/89: 75 VA EFA 33/63/89 + EFA-B3: 90 VA
Dimensions (W x H x D)	435 mm x 147 mm x 460 mm
Weight	approx. 12 kg, depending on options

## Ordering information

<b>DVB-C Test Receiver, selective</b> 4/16/32/64/128/256 QAM, MPEG data stream output, constellation diagram	EFA 60	2067.3004.60
<b>DVB-C Test Demodulator, broadband</b> 4/16/32/64/128/256 QAM, MPEG data stream output, constellation diagram	EFA 63	2067.3004.63
<b>TV Test Receiver, Std. B/G, dual sound</b> IF 38,9 MHz, RF 45 MHz to 860 MHz, IEEE bus	EFA 12	2067.3004.12
<b>TV Demodulator, Std. B/G, dual sound</b> IF 38.9 MHz, RF 45 MHz to 1000 MHz, IEEE bus	EFA 33	2067.3004.33
<b>TV Test Receiver, Std. D/K or I (mono)</b> IF 38.9 MHz, RF 45 MHz to 860 MHz,, IEEE bus	EFA 78	2067.3004.78
<b>TV Demodulator, Std. D/K or I (mono)</b> IF 38.9 MHz, RF 45 MHz to 1000 MHz	EFA 89	2067.3004.89

## Options

NICAM Demodulator for TV standard B/G - D/K	EFA-B2	2067.3610.02
NICAM Demodulator for TV standard I	EFA-B2	2067.3610.04
RF Selection for demodulators (models 33/43/53/63/73/89/93)	EFA-B3	2067.3627.02
MPEG2 Decoder	EFA-B4	2067.3633.02
Video Distributor (four video outputs, only models 33/89/93)	EFA-B6	2067.3656.02
Switchable Sound Trap (for models 12/33)	EFA-B7	2067.3710.02
6 MHz SAW Filter (for digital EFA models or EFA-B10, EFA-B20)	EFA-B11	2067.3691.00
7 MHz SAW Filter (for digital EFA models or EFA-B10, EFA-B20)	EFA-B12	2067.3556.02
8 MHz SAW Filter (for EFA 5x,/6x/7x or EFA-B20)	EFA-B13	2067.3579.03
2 MHz SAW Filter (for EFA 5x,/6x/7x or EFA-B20)	EFA-B14	2067.3562.00
Digital Demodulator Platform	EFA-B20	2067.3585.02

## Firmware options

DVB-C /J83/A/C (QAM) Firmware (for models 50/53/70/73 or option EFA-B20)	EFA-K21	2067.4000.02
ATSC/8VSB Firmware (for models 60/63/70/73 or option EFA-B20)	EFA-K22	2067.4017.02
J.83/B (QAM) Firmware (for models 50/53/60/63 or option EFA-B20)	EFA-K23	2067.4023.02
FIR Coefficient Readout Firmware (only for EFA 5x or EFA-B20 + EFA-K22)	EFA-K25	2067.4046.02

## Recommended extras

EFA Calibration Values	EFA-DCV	2082.0490.09
EFA-B4 Calibration Values	EFA-DCV	2082.0490.15
19" Adapter	ZZA-93	0396.4892.00
Lemo Triax connector (mono) with connecting cable (open)		2067.7451.00
Service manual		2068.0950.24
Carrying Bag for 19" units, 3 HU, depth 460 mm	ZZT-314	1001.0523.00

