

**1.5:1 Auto Transformer
5-1000MHz**


**MABACT0063
V1P**

Features


- Surface Mount
- 1.5:1 Impedance
- 260°C Reflow Compatible
- RoHS* Compliant
- Available on Tape and Reel. Reel quantity 2000

Description

M/A-COM's MABACT0063 is a 1.5:1 Auto Transformer in a low cost, surface mount package. Ideally suited for high volume CATV/Broadband applications.

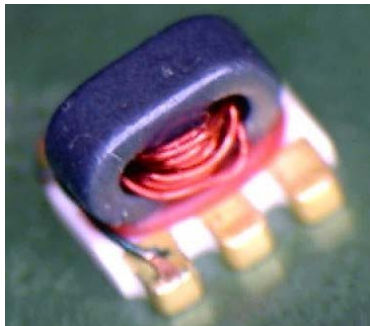


Schematic

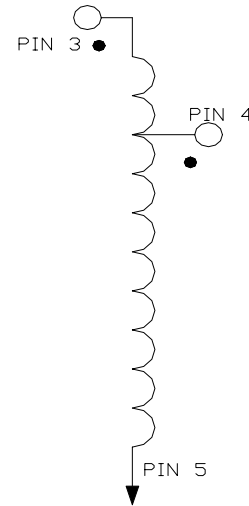

Pin Configuration

Pin No.	Function
1	Not Connected
2	Not Connected
3	Primary Dot (e.g. 75 Ohms)
4	Secondary Dot (e.g. 50 Ohms)
5	Primary and Secondary (Ground)

Case Style: SM-22

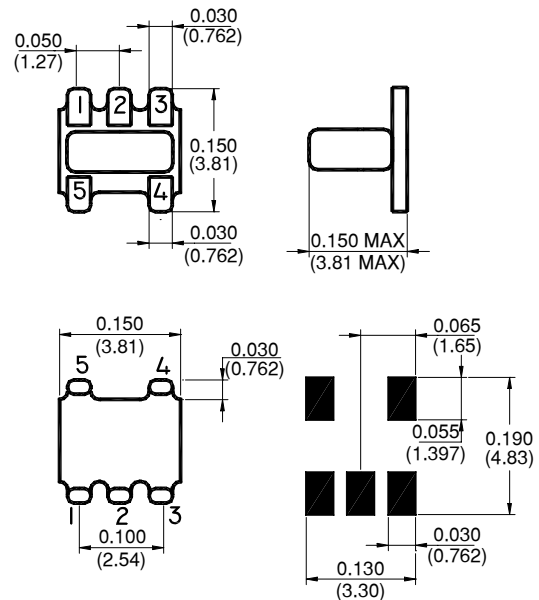

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

Ordering Information

Part Number	Package
MABACT0063TR	2000 piece reel

Note: Reference Application Note **M513** for reel size information.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

1.5:1 Auto Transformer
5-1000MHz

MABACT0063
V1P

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹


Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	-	5 - 1000 MHz	dB	-	0.5	1.0
Input Return Loss	-	5 - 500 MHz	dB	24	30	-
Input Return Loss	-	500 - 1000 MHz	dB	16	26	-

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
Max Input Power	250mW
DC current	100mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

Recommended PCB Configuration

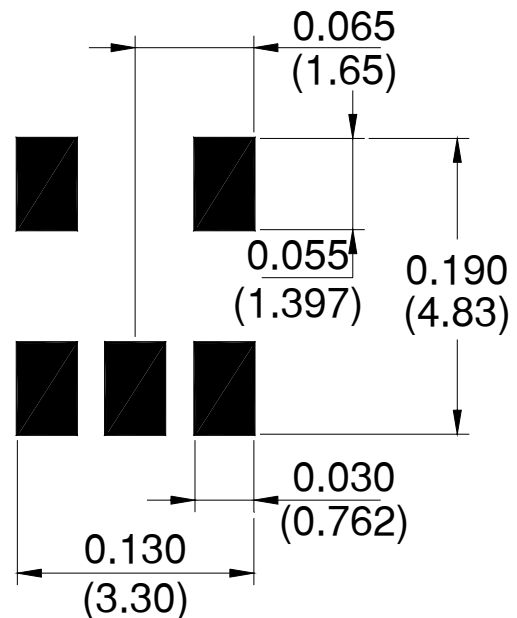


1.5:1 Auto Transformer
5-1000MHz

MABACT0063
V1P

Typical Performance Curves

Insertion Loss: pin 4 to 3

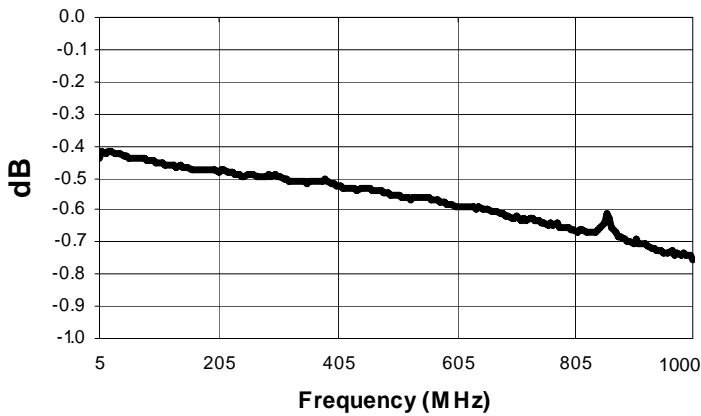

Input Return Loss: pin 4

