

ELECTRONICS

© Samsung Electronics Co., Ltd. MAR. 2000
Printed in Korea
AH68-00434A

SERVICE MANUAL
DVD-611/511


SAMSUNG

SAMSUNG

DVD PLAYER
DVD-611
DVD-511

SERVICE Manual

DVD PLAYER

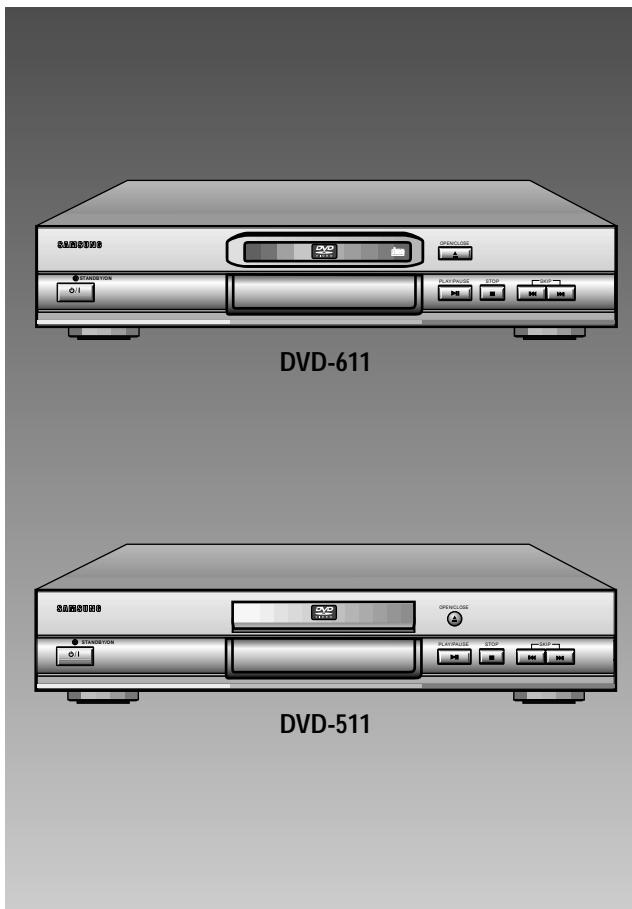

CONTENTS

1. Precautions
2. Reference Information
3. Product Specification
4. Disassembly and Reassembly
5. Circuit Descriptions
6. Troubleshooting
7. Exploded Views and Parts List
8. Electrical Parts List
9. Block Diagrams
10. PCB Diagrams
11. Wiring Diagram
12. Schematic Diagrams

1. Precautions

1-1 Safety Precautions

1) Before returning an instrument to the customer, always make a safety check of the entire instrument, including, but not limited to, the following items:

(1) Be sure that no built-in protective devices are defective or have been defeated during servicing.
(1) Protective shields are provided to protect both the technician and the customer. Correctly replace all missing protective shields, including any removed for servicing convenience.
(2) When reinstalling the chassis and/or other assembly in the cabinet, be sure to put back in place all protective devices, including, but not limited to, nonmetallic control knobs, insulating fish papers, adjustment and compartment covers/shields, and isolation resistor/capacitor networks. Do not operate this instrument or permit it to be operated without all protective devices correctly installed and functioning.

(2) Be sure that there are no cabinet openings through which adults or children might be able to insert their fingers and contact a hazardous voltage. Such openings include, but are not limited to, excessively wide cabinet ventilation slots, and an improperly fitted and/or incorrectly secured cabinet back cover.

(3) Leakage Current Hot Check-With the instrument completely reassembled, plug the AC line cord directly into a 120V AC outlet. (Do not use a isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1270 (40.7). With the instrument's AC switch first in the ON position and then in the OFF position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinets, screwheads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis.

Any current measured must not exceed 0.5mA. Reverse the instrument power cord plug in the outlet and repeat the test. See Fig. 1-1.

Any measurements not within the limits specified herein indicate a potential shock hazard that must be eliminated before returning the instrument to the customer.

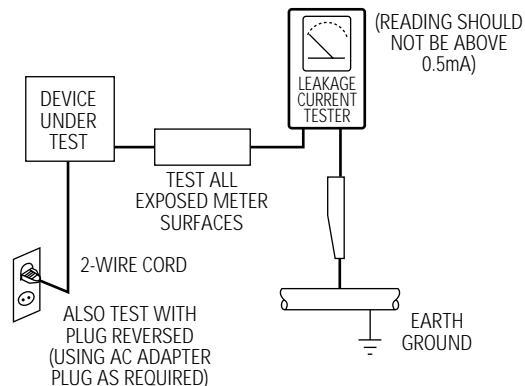


Fig. 1-1 AC Leakage Test

(4) Insulation Resistance Test Cold Check-(1) Unplug the power supply cord and connect a jumper wire between the two prongs of the plug. (2) Turn on the power switch of the instrument. (3) Measure the resistance with an ohmmeter between the jumpered AC plug and all exposed metallic cabinet parts on the instrument, such as screwheads, antenna, control shafts, handle brackets, etc. When an exposed metallic part has a return path to the chassis, the reading should be between 1 and 5.2 megohm. When there is no return path to the chassis, the reading must be infinite. If the reading is not within the limits specified, there is the possibility of a shock hazard, and the instrument must be re-paired and rechecked before it is returned to the customer. See Fig. 1-2.

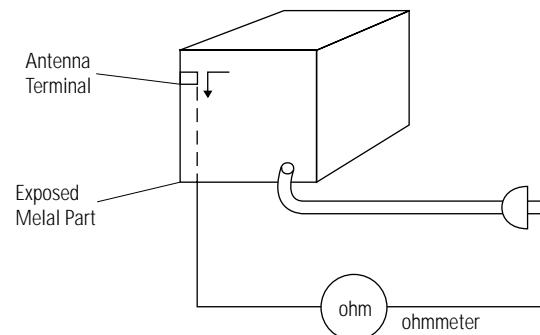


Fig. 1-2 Insulation Resistance Test

Precautions

- 2) Read and comply with all caution and safety related notes non or inside the cabinet, or on the chassis.
- 3) Design Alteration Warning-Do not alter or add to the mechanical or electrical design of this instrument. Design alterations and additions, including but not limited to, circuit modifications and the addition of items such as auxiliary audio output connections, might alter the safety characteristics of this instrument and create a hazard to the user. Any design alterations or additions will make you, the service, responsible for personal injury or property damage resulting therefrom.
- 4) Observe original lead dress. Take extra care to assure correct lead dress in the following areas:
(1) near sharp edges, (2) near thermally hot parts (be sure that leads and components do not touch thermally hot parts), (3) the AC supply, (4) high voltage, and (5) antenna wiring. Always inspect in all areas for pinched, out-of-place, or frayed wiring. Do not change spacing between a component and the printed-circuit board. Check the AC power cord for damage.
- 5) Components, parts, and/or wiring that appear to have overheated or that are otherwise damaged should be replaced with components, parts and/or wiring that meet original specifications. Additionally, determine the cause of overheating and/or damage and, if necessary, take corrective action to remove any potential safety hazard.
- 6) Product Safety Notice-Some electrical and mechanical parts have special safety-related characteristics which are often not evident from visual inspection, nor can the protection they give necessarily be obtained by replacing them with components rated for higher voltage, wattage, etc. Parts that have special safety characteristics are identified by shading, an (▲) or a (△) on schematics and parts lists. Use of a substitute replacement that does not have the same safety characteristics as the recommended replacement part might create shock, fire and/or other hazards. Product safety is under review continuously and new instructions are issued whenever appropriate.

1-2 Servicing Precautions

CAUTION : Before servicing Instruments covered by this service manual and its supplements, read and follow the Safety Precautions section of this manual.

Note : If unforseen cincumst create conflict between the following servicing precautions and any of the safety precautions, always follow the safety precautions. Remember: Safety First.

1-2-1 General Servicing Precautions

- (1) a. Always unplug the instrument's AC power cord from the AC power source before (1) re-moving or reinstalling any component, circuit board, module or any other instrument assembly, (2) disconnecting any instrument electrical plug or other electrical connection, (3) connecting a test substitute in parallel with an electrolytic capacitor in the instrument.
- b. Do not defeat any plug/socket B+ voltage interlocks with which instruments covered by this service manual might be equipped.
- c. Do not apply AC power to this instrument and /or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
- d. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the test instrument positive lead. Always remove the test instrument ground lead last.

Note : Refer to the Safety Precautions section ground lead last.

- (2) The service precautions are indicated or printed on the cabinet, chassis or components. When servicing, follow the printed or indicated service precautions and service materials.
- (3) The components used in the unit have a specified flame resistance and dielectric strength. When replacing components, use components which have the same ratings. Components identified by shading, by (▲) or by (△) in the circuit diagram are important for safety or for the characteristics of the unit. Always replace them with the exact replacement components.

(4) An insulation tube or tape is sometimes used and some components are raised above the printed wiring board for safety. The internal wiring is sometimes clamped to prevent contact with heating components. Install such elements as they were.

(5) After servicing, always check that the removed screws, components, and wiring have been installed correctly and that the portion around the serviced part has not been damaged and so on. Further, check the insulation between the blades of the attachment plug and accessible conductive parts.

1-2-2 Insulation Checking Procedure

Disconnect the attachment plug from the AC outlet and turn the power ON. Connect the insulation resistance meter (500V) to the blades of the attachment plug. The insulation resistance between each blade of the attachment plug and accessible conductive parts(see note) should be more than 1 Megohm.

Note : Accessible conductive parts include metal panels, input terminals, earphone jacks, etc.

1-3 ESD Precautions

Electrostatically Sensitive Devices (ESD)

Some semiconductor (solid state) devices can be damaged easily by static electricity.

Such components commonly are called Electrostatically Sensitive Devices(ESD). Examples of typical ESD devices are integrated circuits and some field-effect transistors and semiconductor chip components. The following techniques should be used to help reduce the incidence of component damage caused by static electricity.

- (1) Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed for potential shock reasons prior to applying power to the unit under test.
- (2) After removing an electrical assembly equipped with ESD devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
- (3) Use only a grounded-tip soldering iron to solder or unsolder ESD devices.
- (4) Use only an anti-static solder removal devices. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ESD devices.
- (5) Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ESD devices.
- (6) Do not remove a replacement ESD device from its protective package until immediately before you are ready to install it.(Most replacement ESD devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive materials).

(7) Immediately before removing the protective materials from the leads of a replacement ESD device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION : Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

(8) Minimize bodily motions when handling unpackaged replacement ESD devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ESD device).

1-4 Handling the optical pick-up

The laser diode in the optical pick up may suffer electrostatic breakdown because of potential static electricity from clothing and your body.

The following method is recommended.

- (1) Place a conductive sheet on the work bench (The black sheet used for wrapping repair parts.)
- (2) Place the set on the conductive sheet so that the chassis is grounded to the sheet.
- (3) Place your hands on the conductive sheet (This gives them the same ground as the sheet.)
- (4) Remove the optical pick up block
- (5) Perform work on top of the conductive sheet. Be careful not to let your clothes or any other static sources to touch the unit.

Be sure to put on a wrist strap grounded to the sheet.

Be sure to lay a conductive sheet made of copper etc. Which is grounded to the table.

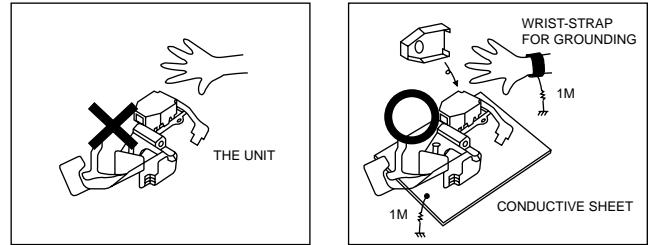


Fig.1-3

- (6) Short the short terminal on the PCB, which is inside the Pick-Up ASS'Y, before replacing the Pick-Up. (The short terminal is shorted when the Pick-Up Ass'y is being lifted or moved.)
- (7) After replacing the Pick-up, open the short terminal on the PCB.

1-5 Pick-up disassembly and reassembly

1-5-1 Disassembly

- 1) Remove the power cable.
- 2) Switch SW3 on deck PCB to "OFF" before removing the FPC.
(Inserted into Main PCB DCN1. See Fig. 1-4)
- 3) Disassemble the deck.
- 4) Disassemble the deck PCB.

1-5-2 Assembly

- 1) Replace the Pick-up.
- 2) Assemble the deck PCB.
- 3) Reassemble the deck.
- 4) Insert FPC into Main PCB DCN1 and switch SW3 on deck PCB to "ON". (See Fig 1-4)

Note : If the assembly and disassembly are not done in correct sequence, the Pick-up may be damaged.


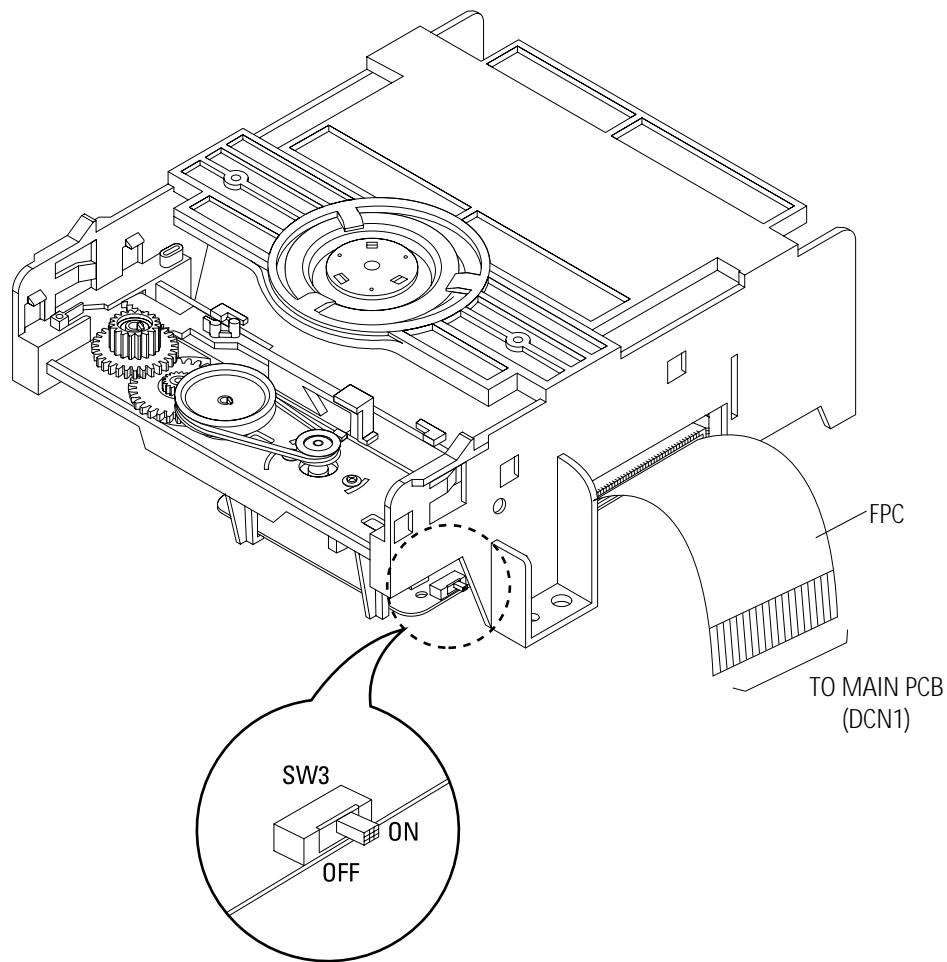


Fig. 1-4


2. Reference Information

2-1 IC Descriptions

2-1-1 AIC1 (AK4393 ; Digital-to-Analog Converter)

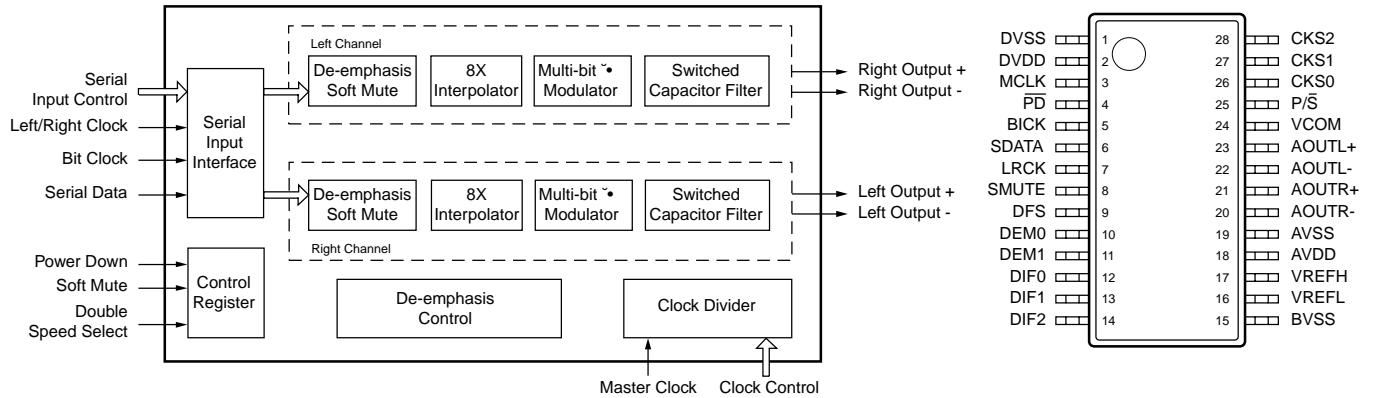


2-1-2 DIC1 (KS1453 ; Data Processor)

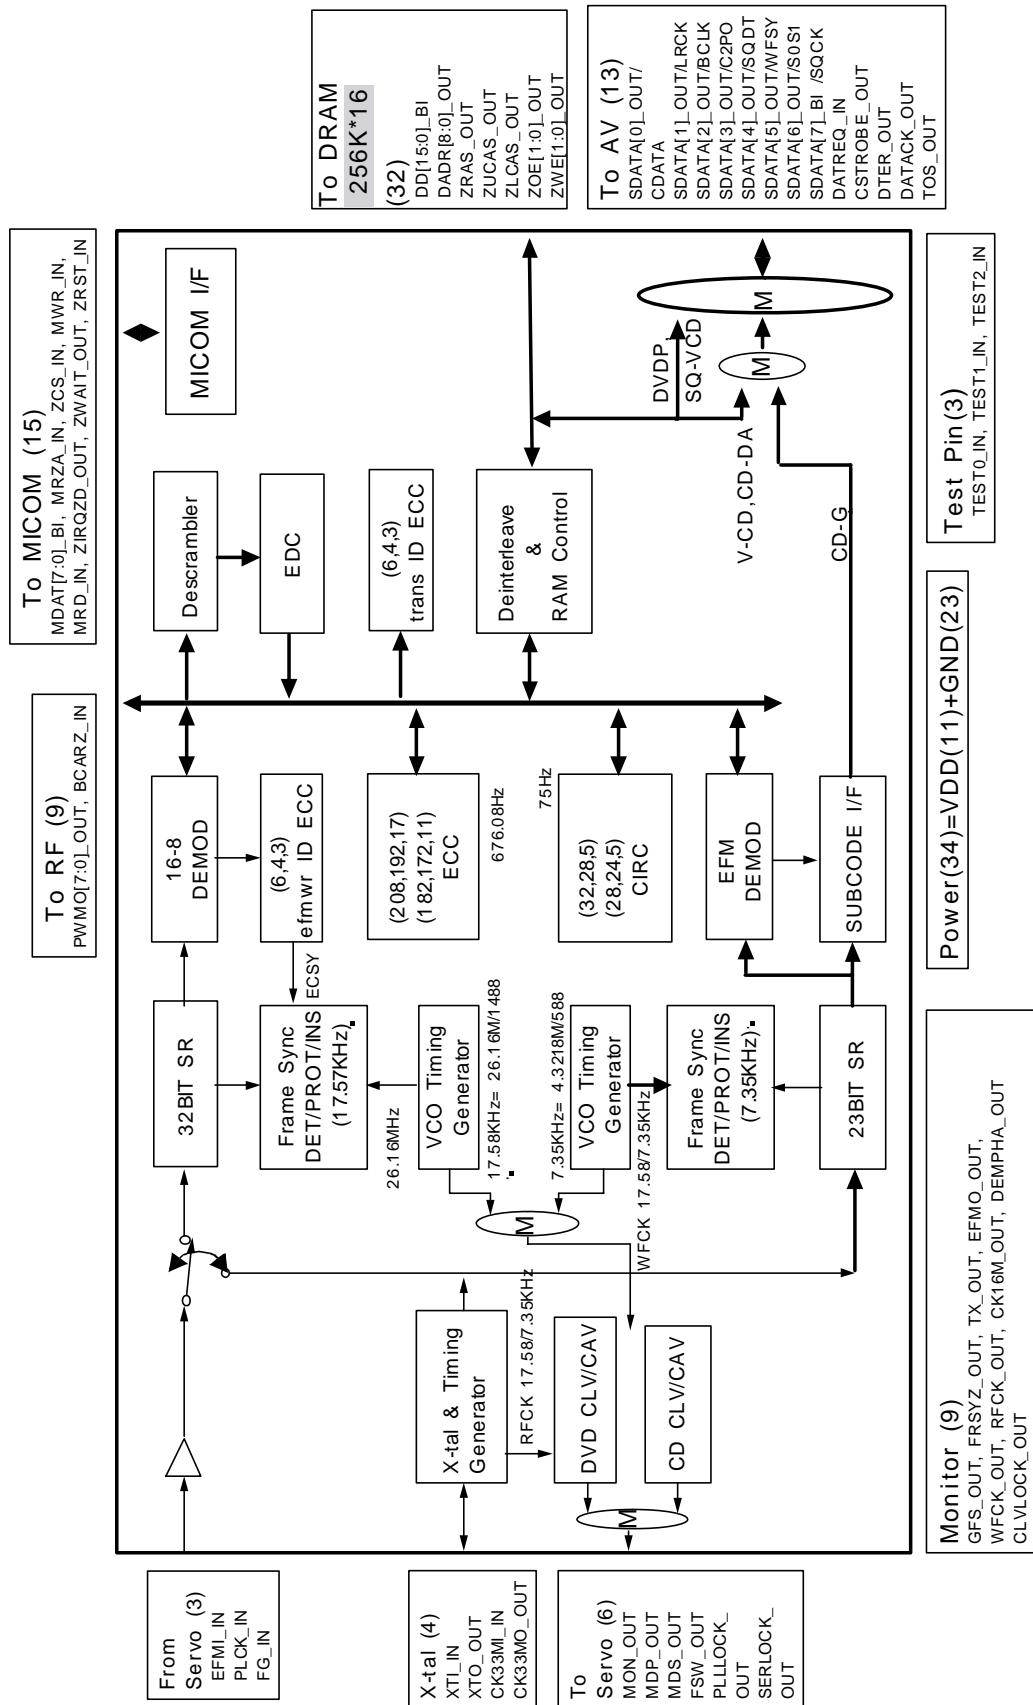


| No. | Pin Name | Description | I/O | Notes | No. | Pin Name | Description | I/O | Notes |
|-----|------------|--|-----|------------|-----|-------------|--|-------|------------|
| 1 | DVSS | Digital GND (0 V) | | | 65 | SDATA5_OUT | DVD Data/Subcode Frame Sync (WFSY) | O | AV Decoder |
| 2 | ZCS_IN | Chip Select (Active Low) | - | MICOM | 66 | SDATA6_OUT | DVD Data/Subcode Serial Clock (SOCK1) | O | AV Decoder |
| 3 | MBA_IN | Micom Register Select (L REGISTER Hifi DATA) | - | MICOM | 67 | SDATA7_BI | DVD Data/Subcode Serial Clock (SOCK1) | B | AV Decoder |
| 4 | DVSS | Digital GND (0 V) | | | 68 | DVSS | Digital GND (0 V) | | |
| 5 | MDAT7_BI | MICOM Data Bus | B | MICOM | 69 | CSTROBE_OUT | Data Strobe (Clock) Output | O | AV Decoder |
| 6 | MDAT6_BI | MICOM Data Bus | B | MICOM | 70 | DREQ_IN | Data Request from AV Decoder or ROM Decoder | - | AV Decoder |
| 7 | MDAT5_BI | MICOM Data Bus | B | MICOM | 71 | DTER_OUT | DVD Data Error Output | O | AV Decoder |
| 8 | MDAT4_BI | MICOM Data Bus | B | MICOM | 72 | DVSS | Digital GND (0 V) | | |
| 9 | MDAT3_BI | MICOM Data Bus | B | MICOM | 73 | PWM07_OUT | PWM Output Signal | O | RF |
| 10 | MDAT2_BI | MICOM Data Bus | B | MICOM | 74 | PWM06_OUT | PWM Output Signal | O | RF |
| 11 | MDAT1_BI | MICOM Data Bus | B | MICOM | 75 | PWM05_OUT | PWM Output Signal | O | RF |
| 12 | MDAT0_BI | MICOM Data Bus | B | MICOM | 76 | PWM04_OUT | PWM Output Signal | O | RF |
| 13 | DVDD | Digital Power (+5V) | | | 77 | DVDD | Digital Power (+5 V) | | |
| 14 | XTL_IN | System Clock Input for 26.16 MHz | - | XTAL | 78 | PWM03_OUT | PWM Output Signal | O | RF |
| 15 | XTO_OUT | System Clock Output for 26.16 MHz | O | | 79 | PWM02_OUT | PWM Output Signal | O | RF |
| 16 | DVSS | Digital GND (0 V) | | | 80 | PWM01_OUT | PWM Output Signal | O | RF |
| 17 | DD15_BI | DRAM Data Bus | B | DRAM | 81 | PWM00_OUT | PWM Output Signal | O | RF |
| 18 | DD0_BI | DRAM Data Bus | B | DRAM | 82 | DVSS | Digital GND (0 V) | | |
| 19 | DD14_BI | DRAM Data Bus | B | DRAM | 83 | DVSS | Digital GND (0 V) | | |
| 20 | DD1_BI | DRAM Data Bus | B | DRAM | 84 | DVSS | Digital GND (0 V) | | |
| 21 | DVSS | Digital GND (0 V) | | | 85 | DVDD | DIGITAL Power (+5 V) | | |
| 22 | DD13_BI | DRAM Data Bus | B | DRAM | 86 | DVDD | DIGITAL Power (+5 V) | | |
| 23 | DD2_BI | DRAM Data Bus | B | DRAM | 87 | DVSS | Digital GND (0 V) | | |
| 24 | DD12_BI | DRAM Data Bus | B | DRAM | 88 | DVSS | Digital GND (0 V) | | |
| 25 | DD3_BI | DRAM Data Bus | B | DRAM | 89 | DVSS | Digital GND (0 V) | | |
| 26 | DVDD | Digital Power (+5V) | | | 90 | DVSS | Digital GND (0 V) | | |
| 27 | DD11_BI | Digital Data Bus | B | DRAM | 91 | FRSTZ_OUT | Frame Sync Out | O | Monitor |
| 28 | DD4_BI | Digital Data Bus | B | DRAM | 92 | TX_OUT | Digital Out | O | Monitor |
| 29 | DD10_BI | Digital Data Bus | B | DRAM | 93 | GFS_OUT | Good Frame Sync Detection State Output (OK at H) | O | Monitor |
| 30 | DD5_BI | Digital Data Bus | B | DRAM | 94 | DVSS | Digital GND (0 V) | | |
| 31 | DVSS | Digital GND (0 V) | | | 95 | CK32MI_IN | System Clock Input for 33.8688 MHz | - | X-tal |
| 32 | DD9_BI | DRAM Data Bus | B | DRAM | 96 | CK32MO_OUT | System Clock Output for 33.8688 MHz | O | X-tal |
| 33 | DD6_BI | DRAM Data Bus | B | DRAM | 97 | DVDD | Digital Power (+5 V) | | |
| 34 | DD8_BI | DRAM Data Bus | B | DRAM | 98 | TEST0_IN | Test Mode Selection Terminal | - | |
| 35 | DD7_BI | DRAM Data Bus | B | DRAM | 99 | TEST1_IN | Test Mode Selection Terminal | - | |
| 36 | DVSS | Digital GND (0 V) | | | 100 | TEST2_IN | Test Mode Selection Terminal | - | |
| 37 | ZLCAS_OUT | DRAM Low Column Address Strobe | O | DRAM | 101 | EPM0_OUT | EFM Out | O | Monitor |
| 38 | ZUCAS_OUT | DRAM Upper Column Address Strobe | O | DRAM | 102 | WFCK_OUT | Write Frame Pulse | O | Monitor |
| 39 | ZWE1_OUT | DRAM Write Enable 1 (8M ONLY) | O | DRAM | 103 | RFCK_OUT | Reference Frame Pulse | O | Monitor |
| 40 | ZWE0_OUT | DRAM Write Enable 0 (4M, 8M, 16M) | O | DRAM | 104 | PLCK_IN | Phase Locked Clock | - | Servo |
| 41 | ZOE1_OUT | DRAM Output Enable (16M MODE DAD99) | O | DRAM | 105 | MDS_OUT | Spindle Motor Speed Control Signal (3-STATE) | O | Servo |
| 42 | DVDD | Digital Power (+5 V) | | | 106 | PULLOCK_OUT | Lock Signal for PLL | O | Servo |
| 43 | ZOE0_OUT | DRAM Output Enable 0 | O | DRAM | 107 | CLVLOCK_OUT | Lock Signal for CLV | O | Monitor |
| 44 | ZRAS_OUT | DRAM Row Address Strobe | O | DRAM | 108 | SERLOCK_OUT | Lock Signal for SERVO | O | Servo |
| 45 | DADDR8_OUT | DRAM Address Bus | O | DRAM | 109 | MDP_OUT | Spindle Motor Phase Control Signal (3-STATE) | O | Servo |
| 46 | DADR7_OUT | DRAM Address Bus | O | DRAM | 110 | MDS_OUT | Spindle Motor Speed Control Signal (3-STATE) | O | Servo |
| 47 | DVSS | Digital GND (0 V) | | | 111 | DVSS | Digital GND (0 V) | | |
| 48 | DADR0_OUT | DRAM Address Bus | O | DRAM | 112 | DVSS | Digital GND (0 V) | | |
| 49 | DADR6_OUT | DRAM Address Bus | O | DRAM | 113 | MON_OUT | Spindle Motor Phase Filter Switching Output | O | Servo |
| 50 | DADR1_OUT | DRAM Address Bus | O | DRAM | 114 | FG_IN | Reference Signal for CAV | - | Servo |
| 51 | DADR5_OUT | DRAM Address Bus | O | DRAM | 115 | FSW_OUT | Spindle Motor Output Filter Switching Output (3-STATE) | O | Servo |
| 52 | DADR2_OUT | DRAM Address Bus | O | DRAM | 116 | EPM1_IN | EFM/EPM+ Signal Input | Notes | - |
| 53 | DADR4_OUT | DRAM Address Bus | O | DRAM | 117 | DVDD | Digital Power (+5 V) | | |
| 54 | DADR3_OUT | DRAM Address Bus | O | DRAM | 118 | DVDD | Digital Power (+5 V) | | |
| 55 | DVSS | Digital GND (0 V) | | | 119 | DVDD | Digital Power (+5 V) | | |
| 56 | DVSS | Digital GND (0 V) | | | 120 | CK16M_OUT | CK32Ms 2 GHz Clock / 16.9344 MHz | O | Monitor |
| 57 | TOS_OUT | Top of Sector | O | AV Decoder | 121 | DEMPHA_OUT | High, when on Deemphasis | O | Monitor |
| 58 | DATACK_OUT | Data Acknowledge Signal Output | O | AV Decoder | 122 | BOARZ_IN | BCA Input Signal | - | RF |
| 59 | DVDD | Digital Power (+5 V) | | | 123 | DVSS | Digital GND (0 V) | | |
| 60 | SDATA0_OUT | DVD Data/CD Data Bit Stream (CData) | O | AV Decoder | 124 | 2RST_IN | Hardware Reset (Active Low) | - | MICOM |
| 61 | SDATA1_OUT | DVD Data/CD Data L/R Clock (LRCK) | O | AV Decoder | 125 | ZWRDZ_OUT | Micom Read / Write Access Wait (Wait at L) | O | MICOM |
| 62 | SDATA2_OUT | DVD Data/CD Data Bit Clock (BLCK) | O | AV Decoder | 126 | ZRQZD_OUT | Interrupt Request to Micom | O | MICOM |
| 63 | SDATA3_OUT | DVD Data/CD Data Error Flag (C2PO) | O | AV Decoder | 127 | MRD_IN | Micom Read Strobe (Active Low) | - | MICOM |
| 64 | SDATA4_OUT | DVD Data/Subcode Serial Data (SQDT) | O | AV Decoder | 128 | MWR_IN | Micom Write Strobe (Active Low) | - | MICOM |

2-1-3 DIC2 (KM416C254D ; CMOS 4M DRAM)

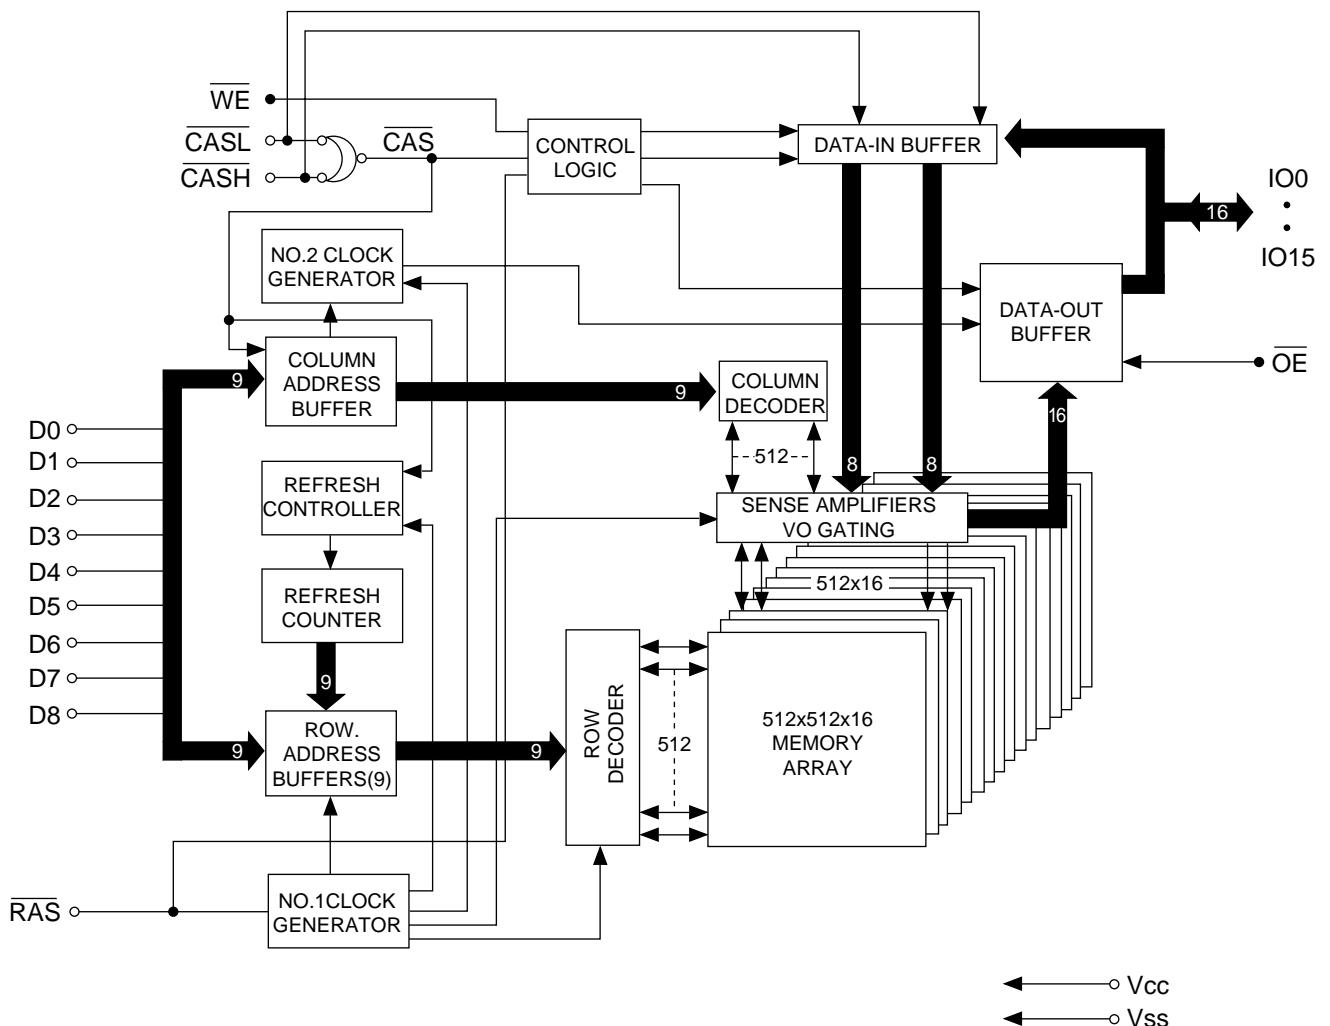

| PIN NO. | SYM. | TYPE | DESCRITION |
|-------------------------|--------------------------|--------------|--|
| 16~19, 22~26 | A0~A8 | Input | Address Input |
| 14 | $\overline{\text{RAS}}$ | Input | Row Address Strobe |
| 28 | $\overline{\text{CASH}}$ | Input | Column Address Strobe/Upper Byte Control |
| 29 | $\overline{\text{CASL}}$ | Input | Column Address Strobe/Lower Byte Control |
| 13 | $\overline{\text{WE}}$ | Input | Write Enable |
| 27 | $\overline{\text{OE}}$ | Input | Output Enable |
| 2~5, 7~10, 31~34, 36~39 | I/O0~I/O15 | Input/Output | Data Input/Output |
| 1, 6, 20 | Vcc | Supply | Power, 5V |
| 21, 35, 40 | Vss | Ground | Ground |
| 11, 12, 15, 30 | NC | - | No Connect |

2-1-4 MIC1 (TMP95C265 ; Main Micom)

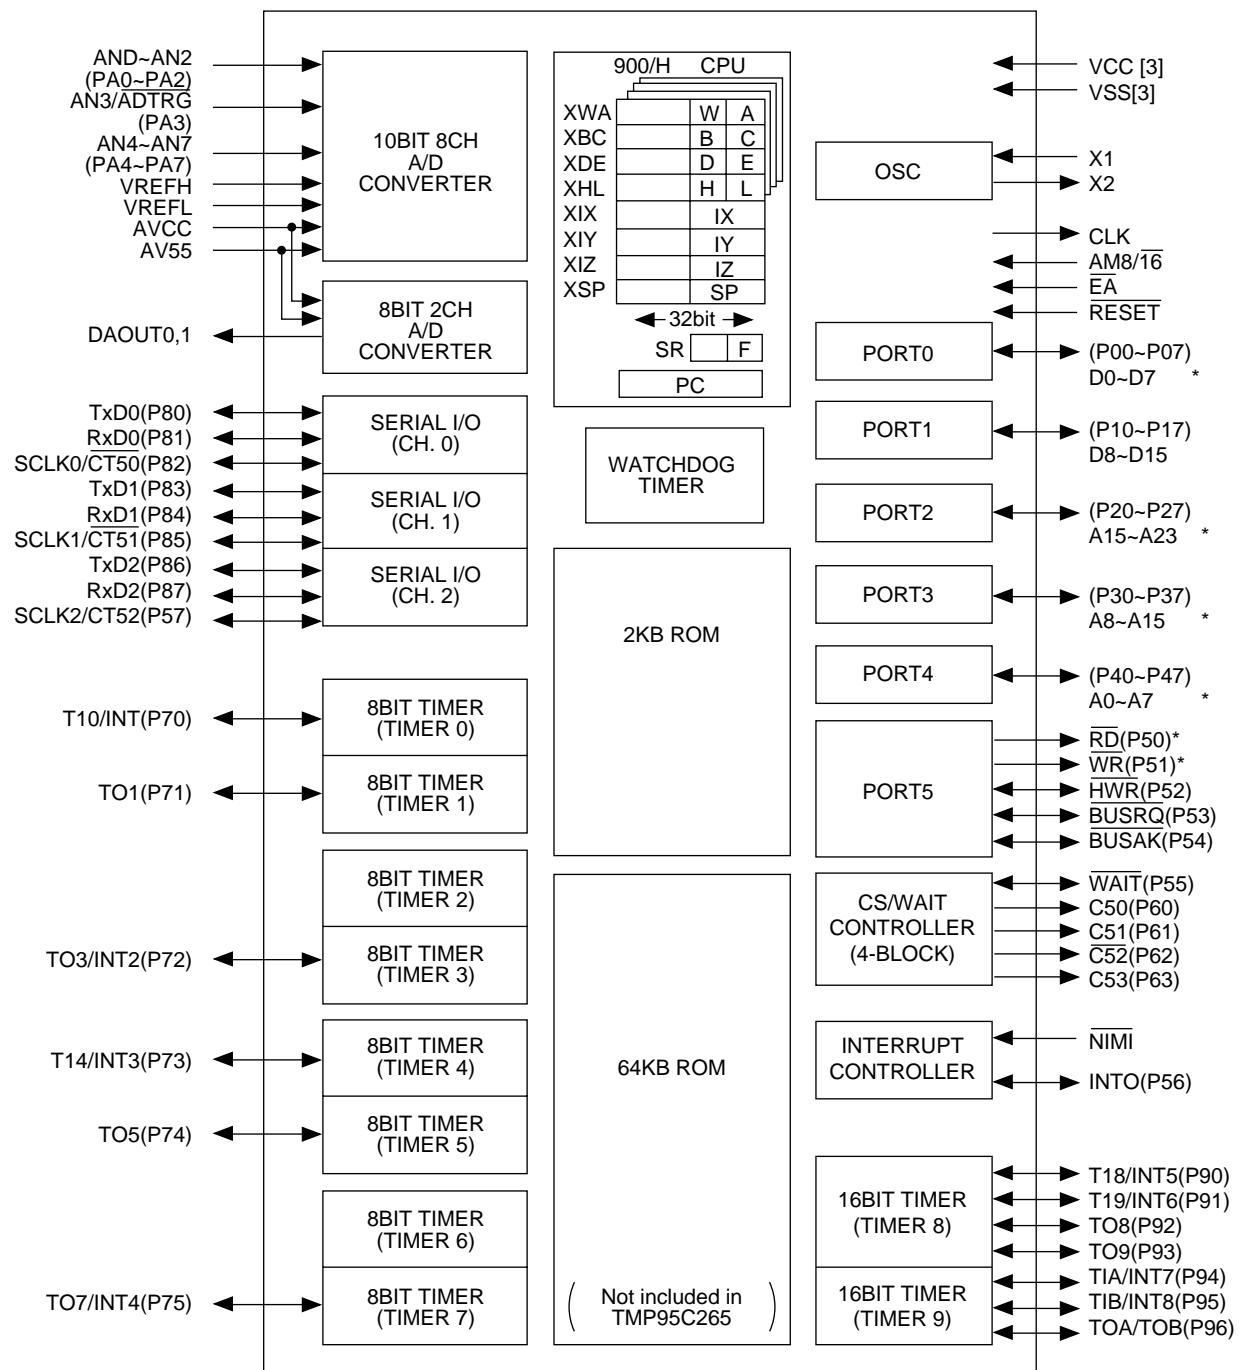


| NO | PORT NAME | ASSIGNED NAME | DESCRIPTION | TYPE | REMARK | PORT NAME | ASSIGNED NAME | DESCRIPTION | TYPE | REMARK |
|----|-----------|---------------|---------------------------------------|------|------------------------|-----------|---------------|----------------------------------|------|------------------------|
| 1 | VREFE1 | DGND | A/D Ref Input(L) | - | DGND | D6 | HAD6 | Data6 | I/O | |
| 2 | AVss | DGND | A/D Ref Input | - | DGND | D7 | HAD7 | Data7 | I/O | |
| 3 | AVcc | 5D | A/D VCC Input | - | 5D | P10 | CLSW | Close Switch | 1 | DECK |
| 4 | DAQOUT0 | MTP1 | | 0 | NC | P11 | OPSW | Open Switch | 1 | DECK |
| 5 | DAQUT1 | MPT2 | | 0 | NC | P12 | MTP8 | Reserved I/O | 0 | NC |
| 6 | /NMI | - | PULL-UP | 1 | - | P13 | MTP9 | Reserved I/O | 0 | NC |
| 7 | P53 | CSB | D. Servo IC Chip Select | 0 | KS1452(10) | P14 | MTP10 | Reserved I/O | 0 | NC |
| 8 | P54/BUSAk | MTP3 | | 0 | - | P15 | MTP11 | Reserved I/O | 0 | NC |
| 9 | /NWAIT | /NWAIT | Wait(ZIV/A, DSP) | - | - | P16 | MTP12 | Reserved I/O | 0 | NC |
| 10 | P56 | DVD/CD | DVD/CD RF AGC Gain Select | 0 | RF(KS1461) | P17 | MTP13 | Reserved I/O | 0 | NC |
| 11 | SCLK2 | SCLK | Serial Data Clock | 1 | FRONT | AM8/16 | AM8 | Address Mode(H:8 BIT MODE) | 1 | VCC |
| 12 | P80/TXD0 | MD | RF Control Data | 0 | KS1461(69) | Vss | DGND | - | GND | |
| 13 | P81/RXD0 | STB | RF Data Latch | I/O | KS1461(71) | Vcc | 5D | - | VCC | |
| 14 | P82/SCLK0 | MC | RF Control Clock | 0 | KS1461(70) | A23 | HA23 | SERVO /RD Stroke Mask Signal | 0 | 74HC00(6) |
| 15 | P83/TXD1 | MTP5 | | 0 | NC | P26/A22 | MTP14 | Reserved Address Port | 0 | NC |
| 16 | P84/RXD1 | MTP6 | | 0 | NC | P25/A21 | MTP15 | Reserved Address Port | 0 | NC |
| 17 | P85/SCLK1 | MTP4 | | 0 | NC | P24/A20 | MTP16 | Reserved Address Port | 0 | NC |
| 18 | TXD2 | RXD | Serial Data Output | 0 | FRONT | A19 | HA19 | Address 19 | 0 | EPROM, SRAM ADDRESS |
| 19 | RXD2 | TxD | Serial Data Input | 1 | FRONT | A18 | HA18 | Address 18 | 0 | EPROM, SRAM ADDRESS |
| 20 | CSD | /CSO | EPROM(M27C801) Select | 0 | EPROM(M27C801) | A17 | HA17 | Address 17 | 0 | EPROM, SRAM ADDRESS |
| 21 | C\$1 | /CS1 | SRAM(KM681000) Select | 0 | SRAM(KM681000) | A16 | HA16 | Address 16 | 0 | EPROM, SRAM ADDRESS |
| 22 | C\$2 | /DVD1CS | AV/Decoder(ZIV/A4) Select | 0 | AV/Decoder(ZIV/A4) | A15 | HA15 | Address 15 | 0 | EPROM, SRAM ADDRESS |
| 23 | C\$3 | /DSPCS | Data Processor(KS1453) Select | 0 | Data Processor(KS1453) | A14 | HA14 | Address 14 | 0 | EPROM, SRAM ADDRESS |
| 24 | CLK | CLK | CLOCK OUTPUT (System Clock÷2) | 0 | fc12 | A13 | HA13 | Address 13 | 0 | EPROM, SRAM ADDRESS |
| 25 | Vcc | 5D | - | - | VCC | A12 | HA12 | Address 12 | 0 | EPROM, SRAM ADDRESS |
| 26 | Vss | DGND | - | - | GND | A11 | HA11 | Address 11 | 0 | EPROM, SRAM ADDRESS |
| 27 | X1 | X1 | High Frequency OSC In | 1 | - | A10 | HA10 | Address 10 | 0 | EPROM, SRAM, ZIV Adu |
| 28 | X2 | X2 | High Frequency OSC out | 0 | 20MHz | A9 | HA9 | Address 9 | 0 | EPROM, SRAM, ZIV Adu |
| 29 | /EA | /EA | Internal ROM Less Mode | 1 | GND | A8 | HA8 | Address 8 | 0 | EPROM, SRAM, ZIV Adu |
| 30 | /REST | MIRST | Master reset from FRONT | 1 | FRONT, IC | A7 | HA7 | Address 7 | 0 | EPROM, SRAM ADDRESS |
| 31 | INT1 | SRQ | Interrupt from Front Micom | 1 | FRONT | A6 | HA6 | Address 6 | 0 | EPROM, SRAM ADDRESS |
| 32 | P71 | RRQ | Request to Front Micom | 0 | FRONT | A5 | HA5 | Address 5 | 0 | EPROM, SRAM ADDRESS |
| 33 | P72 | SCL | EPPROM CLOCK | 0 | KS24C020(6) | A4 | HA4 | Address 4 | 0 | EPROM, SRAM ADDRESS |
| 34 | P73 | SDA | EPPROM DATA I/O | 0 | KS24C020(5) | A3 | HA3 | Address 3 | 0 | EPROM, SRAM ADDRESS |
| 35 | P74 | OPEN | Tray Out Motor Control Output | 0 | DRIVER(OPIN-, 16) | A2 | HA2 | Address 2 | 0 | EPROM, SRAM ADDRESS |
| 36 | P75 | CLOSE | Tray In Motor Control Output | 0 | DRIVER(OPIN-, 17) | A1 | HA1 | Address 1(SERVO DAB) | 0 | EPROM, SRAM ADDRESS |
| 37 | INT5 | FGINT | Interrupt from Spindle Motor FG | 1 | DRIVER(FG, 2) | A0 | HA0 | Address 0(DSP DAB) | 0 | EPROM, SRAM ADDRESS |
| 38 | P91 | ACTMUTE | Driver IC MUTE(Actuator) | 0 | DRIVER(MUTE4, 37) | /RD | /RD | /Read Strobe | 0 | /Read |
| 39 | P92 | M/D MUTE | Driver IC MUTE(Spindle) | 0 | DRIVER(MUTE3, 38) | /WR | /WR | /Write Strobe | 0 | /Write |
| 40 | P93 | ZRST | DSP H/W reset | 0 | KS1453(124) | P52 | RSTB | RF&Servo IC Reset | 0 | KS1461(73), KS1452 (9) |
| 41 | INT7 | /DVDINT | Interrupt from AV-DEC | 1 | INV(ZIV/A-4(5!)) | Vss | DGND | - | DGND | |
| 42 | INT8 | DSPINT | Interrupt from DSP | 1 | INV(KS1453(126)) | PA0 | RFRP | Tracking Lock monitor from SERVO | 1 | KS1452 (7) |
| 43 | P96 | ZIV_A_RST | AV Decoder Reset(Active H:4.0, L:4.1) | 0 | ZIV/A-4(52) | PA1 | TILT0 | Monitor signal | 1 | KS1452 (69) |
| 44 | Vcc | 5D | - | - | - | PA2 | MTP17 | Reserved I | - | NC |
| 45 | D0 | HAD0 | Data 0 | I/O | - | PA3 | SENSE | SENSE monitor from SERVO | - | KS1452 (22) |
| 46 | D1 | HAD1 | Data 1 | I/O | - | PA4 | FR | Spindle direction from SP Driver | - | BA6849FP (20) |
| 47 | D2 | HAD2 | Data 2 | I/O | - | PA5 | SLOCK | LOCK monitor from DSP | - | KS1453 (108) |
| 48 | D3 | HAD3 | Data 3 | I/O | - | PA6 | FOKB | Focus lock monitor from RF | - | KS1461 (48) |
| 49 | D4 | HAD4 | Data 4 | I/O | - | PA7 | RFO | RF sum signal (Analog Input) | - | RFO |
| 50 | D5 | HAD5 | Data 5 | I/O | - | VREFH | 5D | A/D Ref Input (H) | - | 5D |

| NO | PORT NAME | ASSIGNED NAME | DESCRIPTION | TYPE | REMARK |
|----|-----------|---------------|---------------------------------------|------|------------------------|
| 1 | VREFE1 | DGND | A/D Ref Input(L) | - | DGND |
| 2 | AVss | DGND | A/D Ref Input | - | DGND |
| 3 | AVcc | 5D | A/D VCC Input | - | 5D |
| 4 | DAQOUT0 | MTP1 | | 0 | NC |
| 5 | DAQUT1 | MPT2 | | 0 | NC |
| 6 | /NMI | - | PULL-UP | 1 | - |
| 7 | P53 | CSB | D. Servo IC Chip Select | 0 | KS1452(10) |
| 8 | P54/BUSAk | MTP3 | | 0 | - |
| 9 | /NWAIT | /NWAIT | Wait(ZIV/A, DSP) | - | - |
| 10 | P56 | DVD/CD | DVD/CD RF AGC Gain Select | 0 | RF(KS1461) |
| 11 | SCLK2 | SCLK | Serial Data Clock | 1 | FRONT |
| 12 | P80/TXD0 | MD | RF Control Data | 0 | KS1461(69) |
| 13 | P81/RXD0 | STB | RF Data Latch | I/O | KS1461(71) |
| 14 | P82/SCLK0 | MC | RF Control Clock | 0 | KS1461(70) |
| 15 | P83/TXD1 | MTP5 | | 0 | NC |
| 16 | P84/RXD1 | MTP6 | | 0 | NC |
| 17 | P85/SCLK1 | MTP4 | | 0 | NC |
| 18 | TXD2 | RXD | Serial Data Output | 0 | FRONT |
| 19 | RXD2 | TxD | Serial Data Input | 1 | FRONT |
| 20 | CSD | /CSO | EPROM(M27C801) Select | 0 | EPROM(M27C801) |
| 21 | C\$1 | /CS1 | SRAM(KM681000) Select | 0 | SRAM(KM681000) |
| 22 | C\$2 | /DVD1CS | AV/Decoder(ZIV/A4) Select | 0 | AV/Decoder(ZIV/A4) |
| 23 | C\$3 | /DSPCS | Data Processor(KS1453) Select | 0 | Data Processor(KS1453) |
| 24 | CLK | CLK | CLOCK OUTPUT (System Clock÷2) | 0 | fc12 |
| 25 | Vcc | 5D | - | - | VCC |
| 26 | Vss | DGND | - | - | GND |
| 27 | X1 | X1 | High Frequency OSC In | 1 | - |
| 28 | X2 | X2 | High Frequency OSC out | 0 | 20MHz |
| 29 | /EA | /EA | Internal ROM Less Mode | 1 | GND |
| 30 | /REST | MIRST | Master reset from FRONT | 1 | FRONT, IC |
| 31 | INT1 | SRQ | Interrupt from Front Micom | 1 | FRONT |
| 32 | P71 | RRQ | Request to Front Micom | 0 | FRONT |
| 33 | P72 | SCL | EPPROM CLOCK | 0 | KS24C020(6) |
| 34 | P73 | SDA | EPPROM DATA I/O | 0 | KS24C020(5) |
| 35 | P74 | OPEN | Tray Out Motor Control Output | 0 | DRIVER(OPIN-, 16) |
| 36 | P75 | CLOSE | Tray In Motor Control Output | 0 | DRIVER(OPIN-, 17) |
| 37 | INT5 | FGINT | Interrupt from Spindle Motor FG | 1 | DRIVER(FG, 2) |
| 38 | P91 | ACTMUTE | Driver IC MUTE(Actuator) | 0 | DRIVER(MUTE4, 37) |
| 39 | P92 | M/D MUTE | Driver IC MUTE(Spindle) | 0 | DRIVER(MUTE3, 38) |
| 40 | P93 | ZRST | DSP H/W reset | 0 | KS1453(124) |
| 41 | INT7 | /DVDINT | Interrupt from AV-DEC | 1 | INV(ZIV/A-4(5!)) |
| 42 | INT8 | DSPINT | Interrupt from DSP | 1 | INV(KS1453(126)) |
| 43 | P96 | ZIV_A_RST | AV Decoder Reset(Active H:4.0, L:4.1) | 0 | ZIV/A-4(52) |
| 44 | Vcc | 5D | - | - | - |
| 45 | D0 | HAD0 | Data 0 | I/O | - |
| 46 | D1 | HAD1 | Data 1 | I/O | - |
| 47 | D2 | HAD2 | Data 2 | I/O | - |
| 48 | D3 | HAD3 | Data 3 | I/O | - |
| 49 | D4 | HAD4 | Data 4 | I/O | - |
| 50 | D5 | HAD5 | Data 5 | I/O | - |

2-1-5 MIC2 (M27C801 ; 8Mbit (1Mb×8) UVEPROM and OTP EPROM)

LOGIC DIAGRAM

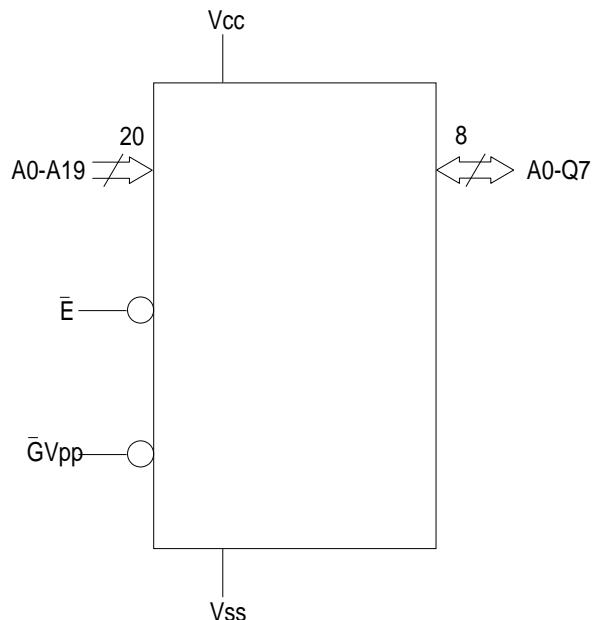


TOP VIEW

| | | |
|-----|----|---|
| A19 | 1 | ● |
| A16 | 2 | |
| A15 | 3 | |
| A12 | 4 | |
| A7 | 5 | |
| A6 | 6 | |
| A5 | 7 | |
| A4 | 8 | |
| A3 | 9 | |
| A2 | 10 | |
| A1 | 11 | |
| A0 | 12 | |
| Q0 | 13 | |
| Q1 | 14 | |
| Q2 | 15 | |
| Vss | 16 | |


| NAME | FUNCTION |
|--------------------------------|------------------------------|
| A0-A ₁₉ | Address Inputs |
| Q ₀ -Q ₇ | Data Outputs |
| \bar{E} | Chip Enable |
| \bar{G}_{Vpp} | Output Enable/Program Supply |
| V_{cc} | Supply Voltage |
| V_{ss} | Ground |

2-1-6 MIC3 (KM681000C ; CMOS 1M SRAM)

BLOCK DIAGRAM

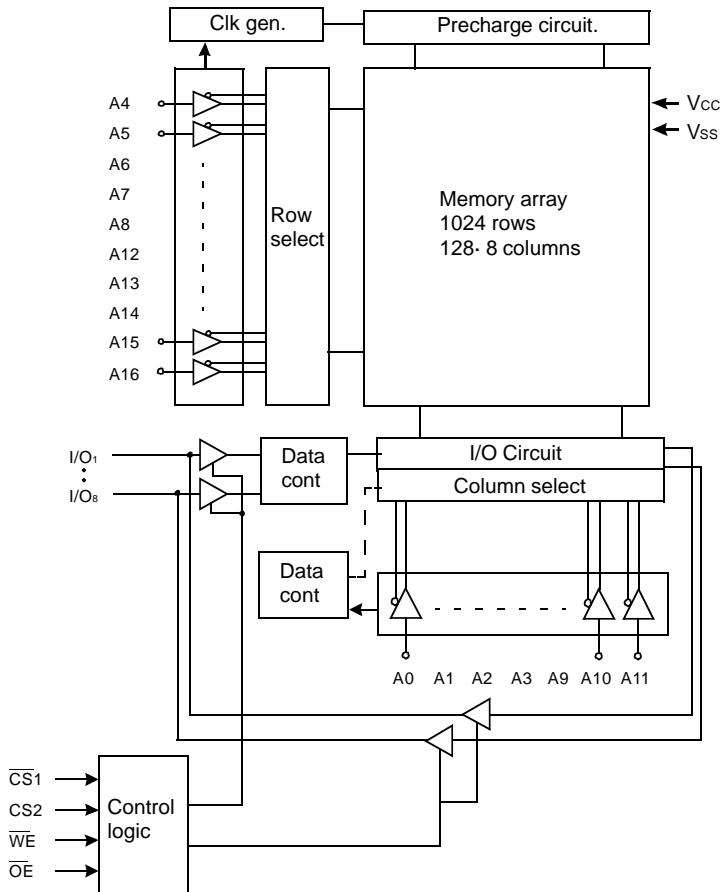


TOP VIEW

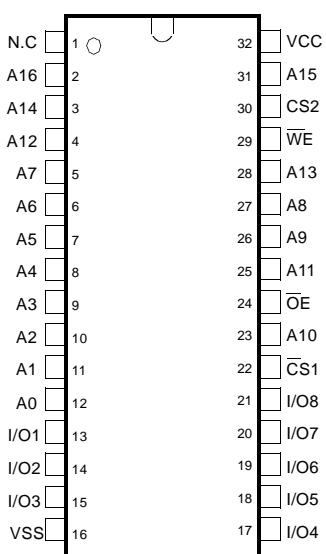

| Name | Function | Name | Function |
|---------|--------------------|-----------|------------------|
| CS1,CS2 | Chip Select Inputs | I/O1~I/O8 | Data Inputs/Out- |
| OE | Output Enable | Vcc | Power |
| WE | Write Enable | Vss | Ground |
| A0~A16 | Address Inputs | N.C | No Connection |


2-1-7 FIC1 (LC86P6232 ; Front Micom)

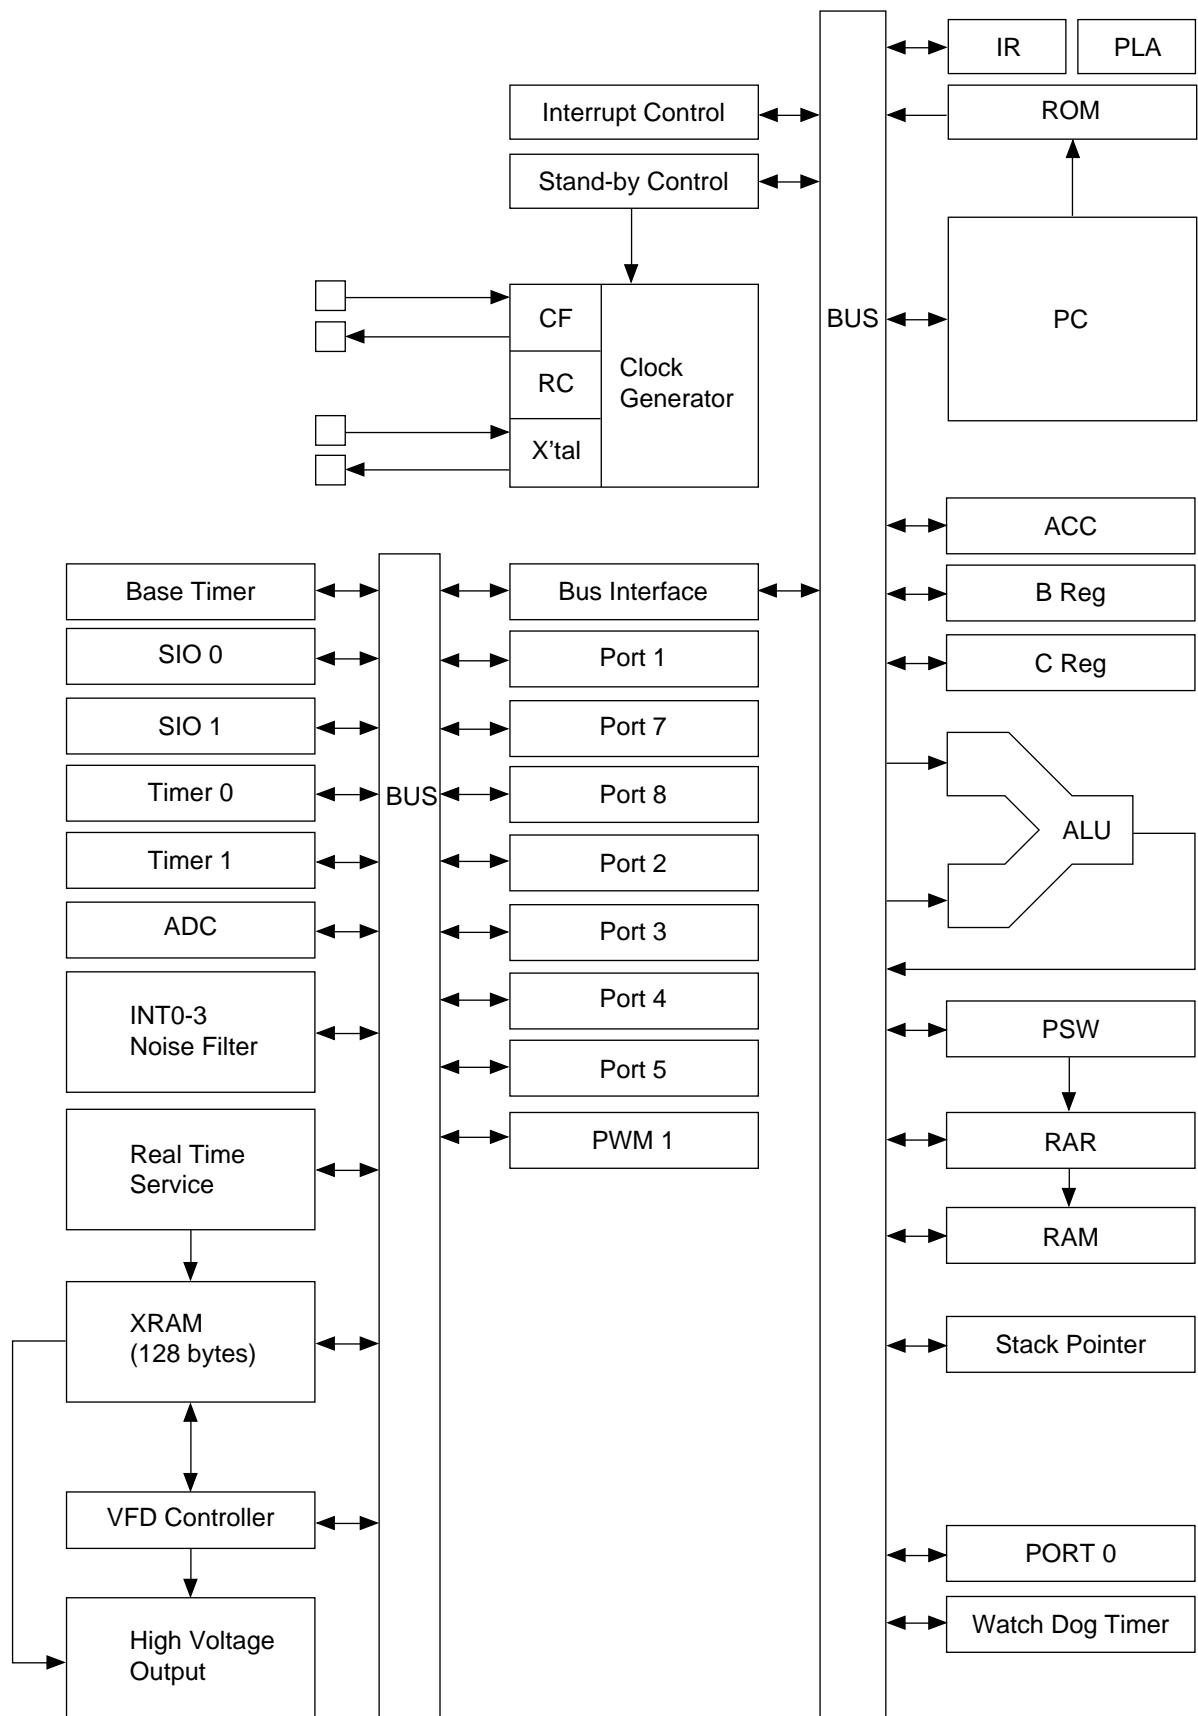

| NO | PORT NAME | TYPE | ASSIGNED NAME | DESCRIPTION | REMARK |
|----|-----------|------|---------------|------------------------|-----------------------|
| 1 | P52 | 0 | MRST | Front end reset | RESET NC |
| 2 | PWM1 | - | TP1 | | FLT SEGMENT CONTROL |
| 3 | P20 | 0 | CS1 | Chip Select 1 | FLT SEGMENT CONTROL |
| 4 | P21 | 0 | CCLK | Control Data Clock | FLT SEGMENT CONTROL |
| 5 | P22 | 0 | CDTI | Control Data | FLT SEGMENT CONTROL |
| 6 | P23 | 0 | CS2 | Chip Select 2 | FLT SEGMENT CONTROL |
| 7 | P24 | 0 | DARST | PD(Power Down) | FLT SEGMENT CONTROL |
| 8 | P25 | 0 | DARST 1 | PD(Power Down) | FLT SEGMENT CONTROL |
| 9 | P26 | 0 | VMUTE0 | BA7660 MUTE(VIC2) | FLT SEGMENT CONTROL |
| 10 | P27 | 0 | VMUTE1 | BA7660 MUTE(VC1) | FLT SEGMENT CONTROL |
| 11 | TEST1 | - | TP4 | VIDEO(RESERVED) | FLT SEGMENT CONTROL |
| 12 | *RES | I | *RES | Reset | FLT SEGMENT CONTROL |
| 13 | XT1 | - | GND | Low Frequency OSC in | FLT SEGMENT CONTROL |
| 14 | XT2 | - | TP5 | Low Frequency OSC out | FLT SEGMENT CONTROL |
| 15 | VSS | - | GND | | HARDWARE MODE SELECT |
| 16 | CF1 | I | - | High Frequency OSC in | MARKEt CODE |
| 17 | CF2 | 0 | - | High Frequency OSC out | MARKEt CODE |
| 18 | VDD | - | VDD | | MARKEt CODE |
| 19 | AN0/P80 | I | ECHO_VR | ECHO volume A/D input | KARAOKE |
| 20 | AN1/P81 | I | MIC_DET | MIC detect | KARAOKE |
| 21 | AN2/P82 | - | TP19 | | NC |
| 22 | AN3/P83 | I | KEY0 | KEY SCAN | NC |
| 23 | AN4/P84 | I | KEY1 | KEY SCAN | NC |
| 24 | AN5/P85 | I | KEY2 | KEY SCAN | NC |
| 25 | AN6/P86 | - | NIC | | NC |
| 26 | AN7/P87 | - | NIC | | NC |
| 27 | P70/IN TO | I | RRQ | Request to Front Micom | MAIN MICOM |
| 28 | P71/INT1 | - | TP25 | | NC |
| 29 | P72/INT2 | - | TP26 | | NC |
| 30 | P73/INT3 | I | REMOCON | REMOCON data in | REMOCON EYE |
| 31 | S0/T0 | 0 | GRID11 | FLT GRID CONTROL | FLT |
| 32 | S1/T1 | 0 | GRID10 | FLT GRID CONTROL | FLT |
| 33 | S2/T2 | 0 | GRID9 | FLT GRID CONTROL | FLT |
| 34 | S3/T3 | 0 | GRID8 | FLT GRID CONTROL | FLT |
| 35 | S4/T4 | 0 | GRID7 | FLT GRID CONTROL | FLT |
| 36 | S5/T5 | 0 | GRID6 | FLT GRID CONTROL | FLT |
| 37 | S6/T6 | 0 | GRID5 | FLT GRID CONTROL | FLT |
| 38 | S7/T7 | 0 | GRID4 | FLT GRID CONTROL | FLT |
| 39 | S8/T8 | 0 | GRID3 | FLT GRID CONTROL | FLT |
| 40 | S9/T9 | 0 | GRID2 | FLT GRID CONTROL | FLT |
| 41 | S10/T10 | 0 | GRID1 | FLT GRID CONTROL | FLT |
| 42 | S11/T11 | 0 | | | SCART JACK |
| 43 | S12/T12 | 0 | SEG1 | FLT SEGMENT CONTROL | SCART JACK |
| 44 | S13/T13 | 0 | SEG2 | FLT SEGMENT CONTROL | SCART JACK |
| 45 | S14/T14 | 0 | SEG3 | FLT SEGMENT CONTROL | request to main micom |
| 46 | S15/T15 | 0 | SEG4 | FLT SEGMENT CONTROL | POWER |
| 47 | VOD | - | +5V | | AUDIO |
| 48 | VP | - | -28V | | AUDIO |
| 49 | S16 | 0 | SEG5 | FLT SEGMENT CONTROL | LED |
| 50 | S17 | 0 | SEG6 | FLT SEGMENT CONTROL | POWER ON/OFF |

| NO | PORT NAME | TYPE | ASSIGNED NAME | DESCRIPTION | REMARK |
|-----|-----------|------|---------------|----------------------|--------------------|
| 51 | S18 | - | SEG7 | FLT SEGMENT CONTROL | FLT |
| 52 | S19 | - | SEG8 | FLT SEGMENT CONTROL | FLT |
| 53 | S20 | - | SEG9 | FLT SEGMENT CONTROL | FLT |
| 54 | S21 | 0 | SEG10 | FLT SEGMENT CONTROL | FLT |
| 55 | S22 | 0 | SEG11 | FLT SEGMENT CONTROL | FLT |
| 56 | S23 | 0 | SEG12 | FLT SEGMENT CONTROL | FLT |
| 57 | S24 | 0 | SEG13 | FLT SEGMENT CONTROL | FLT |
| 58 | S25 | 0 | SEG14 | FLT SEGMENT CONTROL | FLT |
| 59 | S26 | 0 | SEG15 | FLT SEGMENT CONTROL | FLT |
| 60 | S27 | 0 | SEG16 | FLT SEGMENT CONTROL | FLT |
| 61 | S28 | 0 | SEG17 | FLT SEGMENT CONTROL | FLT |
| 62 | S29 | 0 | SEG18 | FLT SEGMENT CONTROL | FLT |
| 63 | S30 | 0 | SEG19 | FLT SEGMENT CONTROL | FLT |
| 64 | S31 | 0 | SEG20 | FLT SEGMENT CONTROL | FLT |
| 65 | P00 | I | MODE4 | HARDWARE MODE SELECT | MARKEt CODE |
| 66 | P01 | I | MODE3 | HARDWARE MODE SELECT | MARKEt CODE |
| 67 | P02 | I | MODE2 | HARDWARE MODE SELECT | MARKEt CODE |
| 68 | P03 | I | MODE1 | HARDWARE MODE SELECT | MARKEt CODE |
| 69 | P04 | I | MODE0 | HARDWARE MODE SELECT | MARKEt CODE |
| 70 | P05 | - | TP10 | | NC |
| 71 | P06 | - | TP11 | | NC |
| 72 | P07 | -- | | | NC |
| 73 | P10/S00 | 0 | TXD | SERIAL DATA OUT | SERIAL DATA IN |
| 74 | P11/S10 | 1 | RXD | SERIAL DATA IN | SERIAL CLOCK |
| 75 | P12/SC K0 | 0 | SCLK | SERIAL CLOCK | NC |
| 76 | P13/S01 | - | TP12 | | NC |
| 77 | P14/SI 1 | - | TP13 | | NC |
| 78 | P15/SC K1 | - | TP14 | | NC |
| 79 | P16/BU Z | - | TP15 | | NC |
| 80 | P17/PW MO | - | TP16 | | NC |
| 81 | P30 | I | S1 | SHUTTLE DATA | JOG/SHUTTLE |
| 82 | P31 | I | S2 | SHUTTLE DATA | JOG/SHUTTLE |
| 83 | P32 | I | S3 | SHUTTLE DATA | JOG/SHUTTLE |
| 84 | P33 | I | S4 | SHUTTLE DATA | JOG/SHUTTLE |
| 85 | P34 | I | J1 | JOG DATA | JOG/SHUTTLE |
| 86 | P35 | I | J2 | JOG DATA | JOG/SHUTTLE |
| 87 | P36 | I | AT | VIDEO OUT SEL. | VIDEO SELECT(OPEN) |
| 88 | P37 | I | AD | VIDEO OUT SEL. | VIDEO SELECT |
| 89 | VSS | - | -5V | | |
| 90 | VDD | - | GND | | |
| 91 | P40 | 0 | RGBCTL | SCART CONTROL | SCART JACK |
| 92 | P41 | 0 | SCON_B | SCART CONTROL | SCART JACK |
| 93 | P42 | - | TP28 | | NC |
| 94 | P43 | 0 | WIDE | SCART CONTROL | SCART JACK |
| 95 | P44 | 0 | SRQ | | NC |
| 96 | P45 | 0 | SAVE | POWER SAVE MODE | POWER |
| 97 | P46 | 0 | AMUTE1 | REAR MUTE | AUDIO |
| 98 | P47 | 0 | AMUTE0 | FRONT MUTE | AUDIO |
| 99 | P50 | 0 | LED | STANDBY LED | LED |
| 100 | P51 | 0 | ON/OFF | POWER ON/OFF | POWER |


2-1-8 RIC1 (KS1461 ; RF Signal Processor)

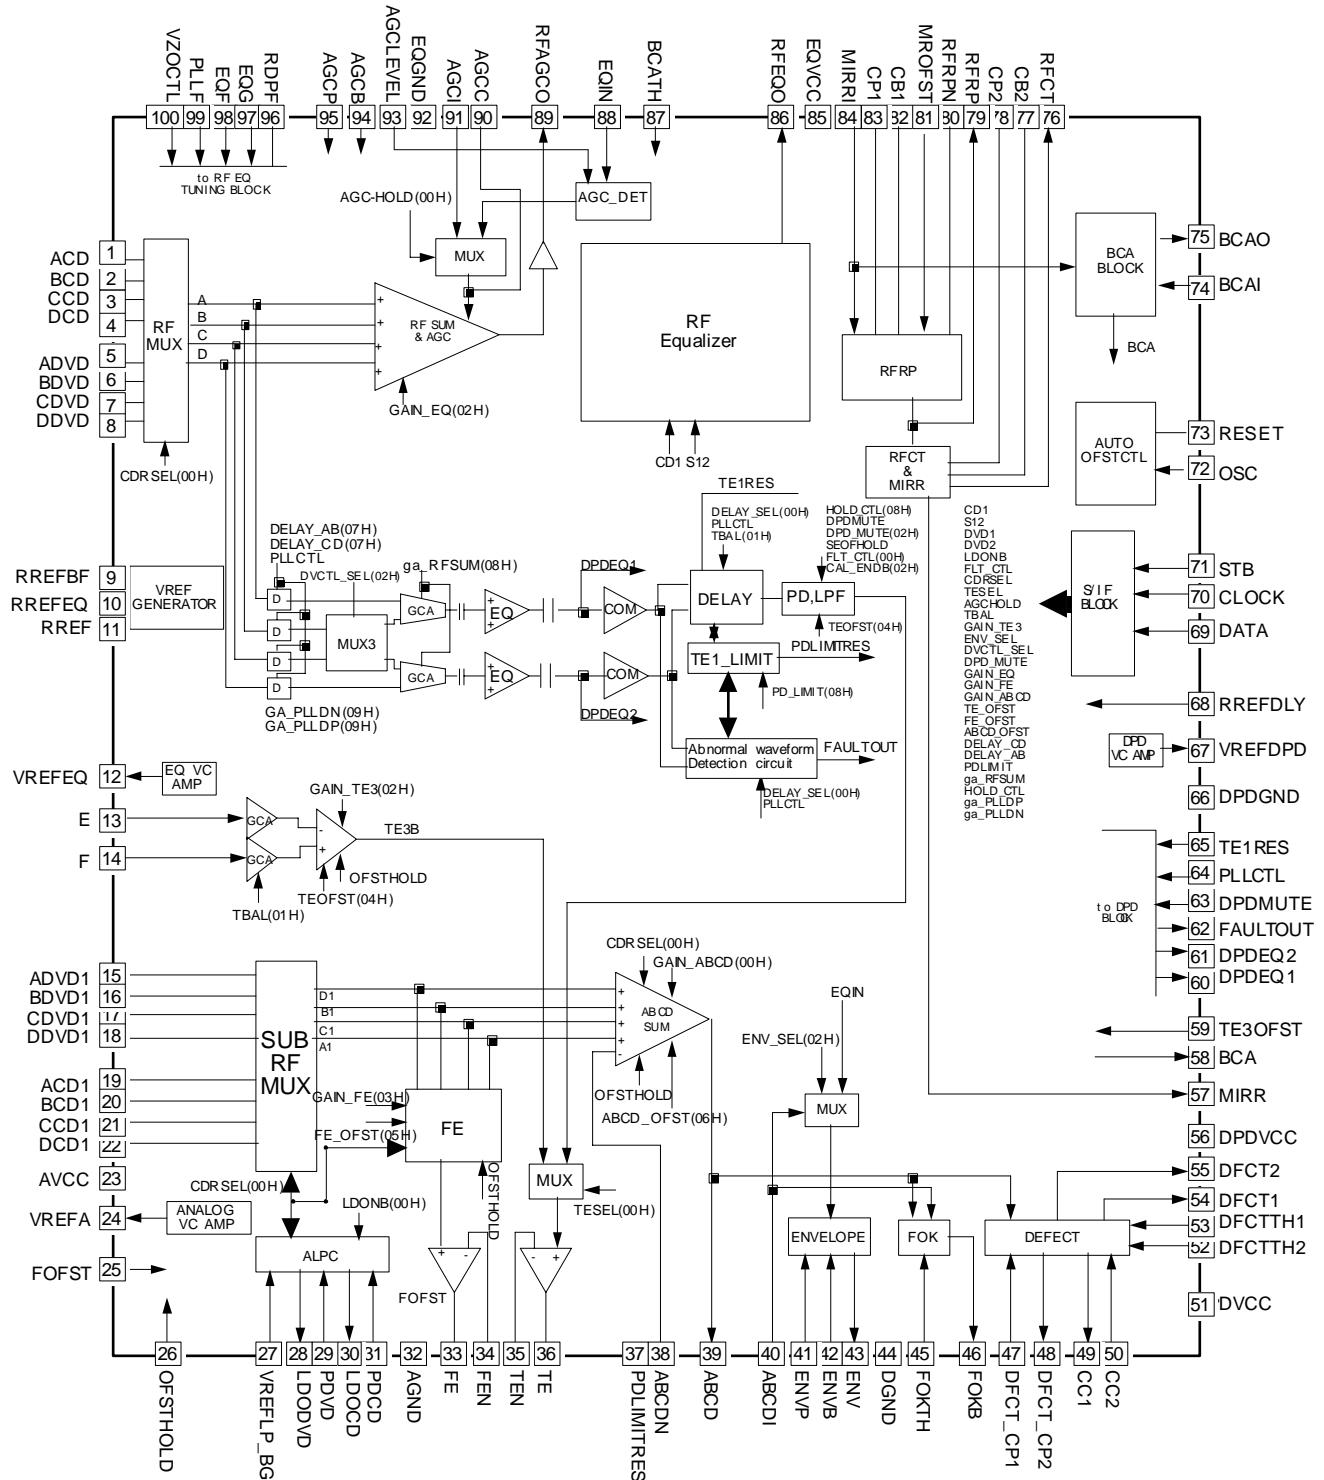

| Pin No. | Pin Name | I/O | Description | Related Block | Related Part |
|---------|------------|-----|--|---------------|--------------|
| 1 | ACD | I | Optical main beam A, AC Coupling input terminals for CD of RF block | PRE AMP | P/U |
| 2 | BCD | I | Optical main beam B, AC Coupling input terminals for CD of RF | PRE AMP | P/U |
| 3 | CCD | I | Optical main beam C, AC Coupling input terminals for CD of RF block | PRE AMP | P/U |
| 4 | DDC | I | Optical main beam D, AC Coupling input terminals for CD of RF block | PRE AMP | P/U |
| 5 | ADVD | I | Optical main beam A, AC Coupling input terminals for DVD of RF block | PRE AMP | P/U |
| 6 | BDVD | I | Optical main beam B, AC Coupling input terminals for DVD of RF | PRE AMP | P/U |
| 7 | CDVD | I | Optical main beam C, AC Coupling input terminals for DVD of RF block | PRE AMP | P/U |
| 8 | DDVD | I | Optical main beam D, AC Coupling input terminals for DVD of RF block | PRE AMP | P/U |
| 9 | RREFBF | - | RF AMP I/O buffer bias resistance connection terminal | RF AMP | - |
| 10 | RREFEQ | - | RF EQ BIAS resistance connection terminal | RF EQ | - |
| 11 | RREF | - | Analog Block bias resistance connection terminal | ANALOG | - |
| 12 | VREFEQ | - | CAP connection terminal for RF EQ Center voltage | EQ VC AMP | - |
| 13 | E | I | CD Optical sub beam E input terminal for Servos | TE 3B | P/U |
| 14 | F | I | CD Optical sub beam F input terminal for Servos | TE 3B | P/U |
| 15 | ADVD1 | I | Optical main beam A input terminal for DVD of Servo block | SERVO AMP | P/U |
| 16 | BDVD1 | I | Optical main beam B input terminal for DVD of Servo block | SERVO AMP | P/U |
| 17 | CDVD1 | I | Optical main beam C input terminal for DVD of Servo block | SERVO AMP | P/U |
| 18 | DDVD1 | I | Optical main beam D input terminal for DVD of Servo block | SERVO AMP | P/U |
| 19 | ACD1 | I | Optical main beam A input terminal for CD of Servo block | SERVO AMP | P/U |
| 20 | BCD1 | I | Optical main beam B input terminal for CD of Servo block | SERVO AMP | P/U |
| 21 | CCD1 | I | Optical main beam C input terminal for CD of Servo block | SERVO AMP | P/U |
| 22 | DDCD1 | I | Optical main beam D input terminal for CD of Servo block | SERVO AMP | P/U |
| 23 | AVCC | P | Power voltage input terminal for Analog Part | ANALOG | - |
| 24 | VREFA | I/O | CAP connection terminal for Analog Part center voltage Uses an external block | ANA VC AMP | SERVO |
| 25 | FOFST | - | CAP connection terminal (open) for Focus Auto Offsets | FE AMP | - |
| 26 | OFSTHOLD | I | On/Off terminal for Auto Offset Block. (L: Auto Offset Adjustments, H: Serial Offset Adjustments) | OFSTCTL | MICOM |
| 27 | VREFLP_BGI | I | Band gap voltage input block for ALPC | ALPC | - |
| 28 | LDODVD | O | Optical Laser Diodes operation voltage output terminal for DVD | ALPC | P/U |
| 29 | PPDVD | I | Optical Laser Monitor Diode voltage input terminal for DVD | ALPC | P/U |
| 30 | LDOCD | O | Optical Laser Diode operating voltage output terminal for CD | ALPC | P/U |
| 31 | PDCCD | I | Optical Laser Monitor Diode voltage input terminal for CD | ALPC | P/U |
| 32 | AGND | P | Power GND terminal for Analog Part | ANALOG | - |
| 33 | FE | O | FE AMP output terminal | FE AMP | DSSP |
| 34 | FEN | I | Input terminal for selecting FE AMP Gain | FE AMP | - |
| 35 | TEN | I | Input terminal for selecting TE AMP Gain | TE AMP | - |
| 36 | TE | O | TE AMP output terminal | TE AMP | DSSP |
| 37 | PDLIMITRES | - | Bias resistance terminal for PDLIMIT | DPD | - |
| 38 | ABCDN | I | ABCD AMP for selecting Gain (-) input terminal | ABCD AMP | - |
| 39 | ABCD | O | ABCD AMP output terminal | ABCD AMP | - |
| 40 | ABCDI | I | ABCD AC Coupling input terminal for servo monitor | SERVO MONIT | - |
| 41 | ENVP | - | CAP connection terminal for selecting the RC value of Peak Hold for detecting RF Envelopes | RF ENV | - |
| 42 | ENVB | - | CAP connection terminal for selecting the RC value of Bottom Hold for detecting RF Envelopes | RF ENV | - |
| 43 | ENV | O | RF Envelope Detect Output terminal | RF ENV | DSSP |
| 44 | DGND | P | Power GND input terminal for digital circuits | DIGITAL | - |
| 45 | FOKTH | I | Focus OK comparating level input terminal | FOKB | - |
| 46 | FOKB | O | Focus OK comparator output terminal (L: Focus OK) | FOKB | DSSP |
| 47 | DFCT_C1 | - | Connection terminal for RC value of Peak Hold, for selecting the maximum time for Servo signal | DFCT | - |
| 48 | DFCT_C2 | - | Connection terminal for RC value of Peak Hold, for selecting the minimum defect time for PLL | DFCT | - |
| 49 | CC1 | O | Peak Hold Output terminal for selecting the minimum Defect time for Defect | DFCT | - |
| 50 | CC2 | I | Peak Hold AC Coupling Input terminal for Defect | DFCT | - |
| 51 | DVCC | P | Power voltage input terminal for digital circuit | DIGITAL | - |
| 52 | DFCTTH2 | - | Resistance connection terminal for selecting the Defect Comparat- ing Level for PLL | DEFECT | - |
| 53 | DFCTTH1 | - | Resistance connection terminal for selecting the Defect Comparat- ing Level for Servo | DEFECT | - |
| 54 | DFCT1 | O | Defect output terminal for Servo | DEFECT | DSSP |
| 55 | DFCT2 | O | Defect output terminal for PLL | DEFECT | PLL |
| 56 | DPDVCC | P | Power voltage input terminal for DPD TE | DPD | - |
| 57 | MIRR | O | Mirror output terminal | MIRR | DSSP |
| 58 | BCA | O | BCA output terminal | BCA | DSP |

| Pin No. | Pin Name | I/O | Description | Related Block | Related Part |
|---------|----------|-----|--|------------------|--------------|
| 59 | TE30FST | - | Cap connection terminal (open) for 3B TE Offset | 3B TE AMP | - |
| 60 | DPDEQ1 | O | DPD EQ (A+C) output terminal | DPD | - |
| 61 | DPDEQ2 | O | DPD EQ (B+D) output terminal | DPD | - |
| 62 | FAULTOUT | O | DPD abnormal wave form output terminal (monitor) | DPD | - |
| 63 | DPDMUTE | I | DPD TE MUTE control terminal (H: Mute) | DPD | MICOM |
| 64 | PLLCTL | I | DPD TE PLL variable input terminal | DPD | SERVO |
| 65 | TE1RES | I | DPD TE PLL variable bias resistance | DPD | - |
| 66 | DPDGND | P | Power GND input terminal for DPD TE | DPD | - |
| 67 | VREFDPD | O | CAP connection terminal for DPD TE center voltage | DPD VC AMP | - |
| 68 | RREFDLY | - | Bias resistance connection terminal for Delay Block | Delay Block | - |
| 69 | DATA | I | Data input terminal | Serial Interface | MICOM |
| 70 | CLOCK | I | Clock input terminal | Serial Interface | MICOM |
| 71 | STB | I | Data Enable input terminal | Serial Interface | MICOM |
| 72 | OSC | I | Input terminal for RC value of OSC, for Auto Offset Block | Auto OFSTCTL | - |
| 73 | RESET | I | Reset input terminal (L: Reset) for Auto Offset Block | Auto OFSTCTL | MICOM |
| 74 | BCAI | I | BCA Filter1 | BCA | - |
| 75 | BCAO | O | BCA Filter2 | BCA | - |
| 76 | RFCT | O | RF Ripple Center voltage output terminal for Mirror | MIRROR | DSSP |
| 77 | CB2 | - | CAP connection terminal of RC value of Bottom Hold, for RFCT generation | MIRROR | - |
| 78 | CP2 | - | CAP connection terminal of RC value of Peak Hold, for RFCT gen- eration | MIRROR | - |
| 79 | RFRP | O | RF Ripple Amp output terminal for Mirror | MIRROR | DSSP |
| 80 | RFRPN | I | Input terminal for selecting RFRP Amp gain | MIRROR | - |
| 81 | MROFST | I | RF Ripple Offset control terminal for Mirror | MIRROR | - |
| 82 | CB1 | - | RC connection terminal of RC value of Bottom Hold, for RFRP generation | MIRROR | - |
| 83 | CP1 | - | RC connection terminal of RC value of Peak Hold, for RFRP gen- eration | MIRROR | - |
| 84 | MIRRI | I | Input terminal for MIRR signal generation | MIRROR | - |
| 85 | EQVCC | P | Power voltage input signal for RF EQ | RF EQ | - |
| 86 | RFEQ0 | O | RF EQ output terminal | RF EQ | PLL |
| 87 | BCATH | I | BCA Comparating Level control terminal | BCA | DSP |
| 88 | EQIN | I | RFAGCO input terminal for RF EQ | RFEQ,RFENV | DSSP |
| 89 | RFAGCO | O | RF AGC AMP output terminal | RF AGC | - |
| 90 | AGCC | - | CAP connection terminal for time constant of AGC | RF AGC | - |
| 91 | AGCI | I | AGC voltage input terminal while in AGC hold | RF AGC | - |
| 92 | EQGND | P | Power GND input terminal for RF EQ | RF EQ | - |
| 93 | AGCLEVEL | I | AGC Level control voltage input terminal (3.5 V) while in AGC hold off | RF AGC | - |
| 94 | AGCB | - | RC connection terminal for RC value of Bottom Hold, for RF AGC | RF AGC | - |
| 95 | AGCP | - | RC connection terminal for RC value of Peak Hold, for RF AGC | RF AGC | - |
| 96 | RDPF | - | Bias resistance connection terminal for selecting RF EQ frequency | RF EQ | - |
| 97 | EQG | I | RF EQ Boost Gain control voltage input terminal | RF EQ | DSSP |
| 98 | EQF | I | RF EQ Peak Frequency control voltage input terminal | RF EQ | DSSP |
| 99 | PLLF | I | Wide-band PLL compatible RF EQ Peak Frequency Control termi- nal | RF EQ | DSSP |
| 100 | VZOCTL | I | RF EQ zero control terminal | RF EQ | DSSP |


2-1-9 SIC1 (KS1452 ; Servo Processor)

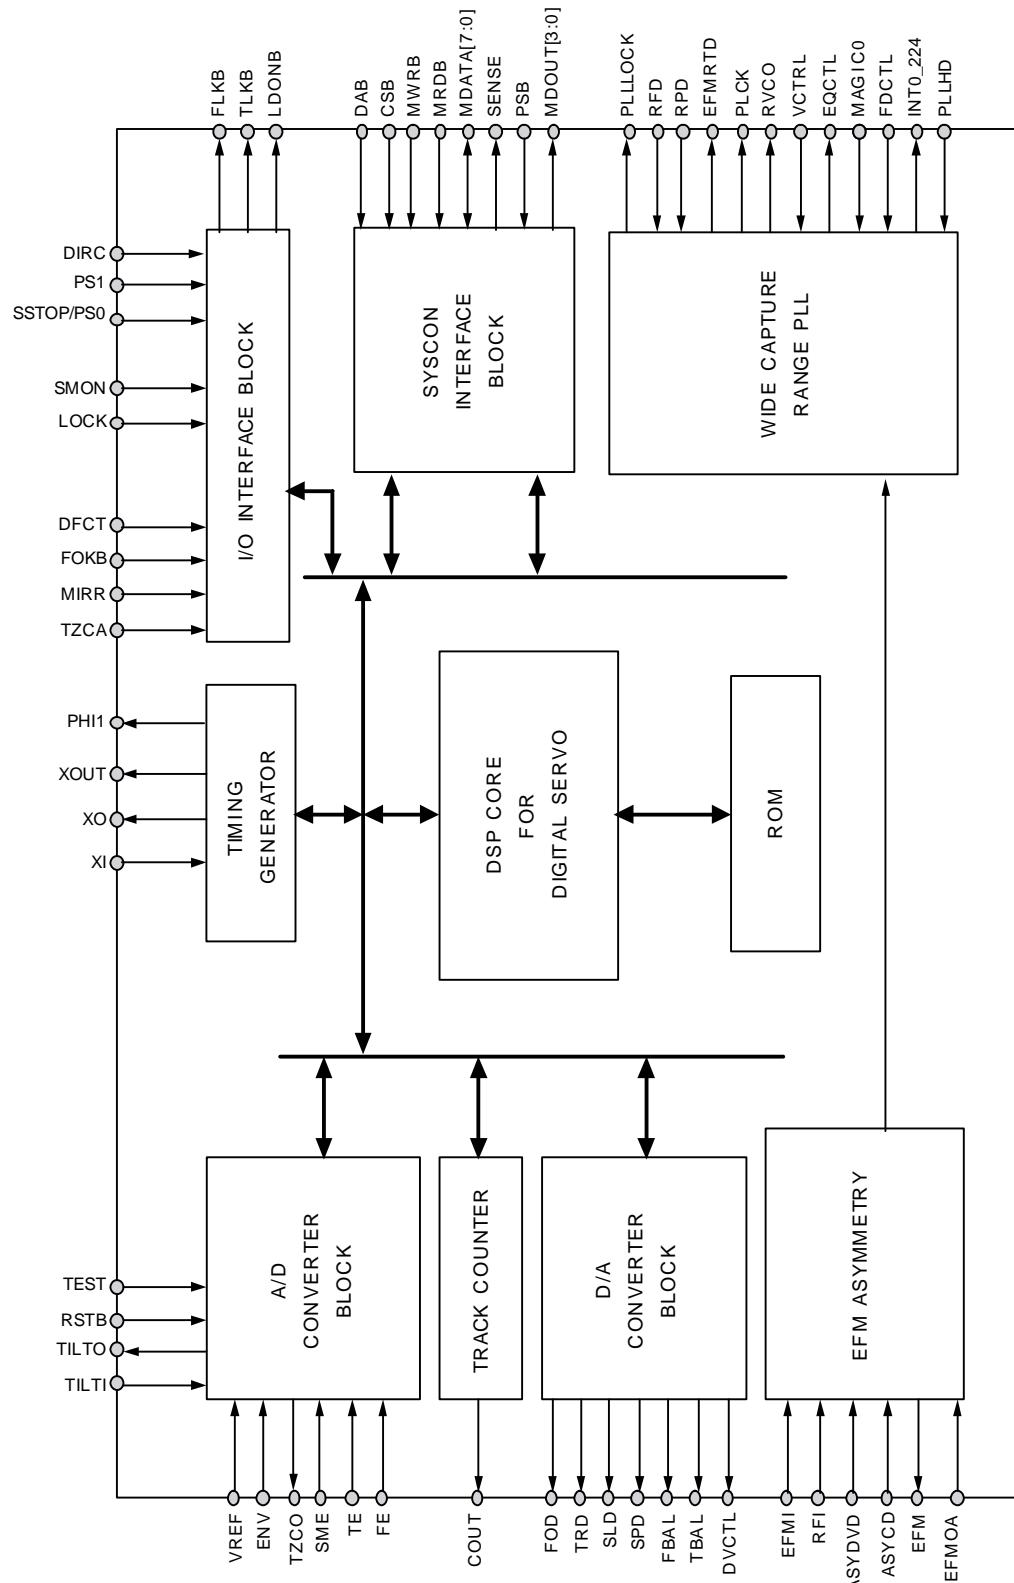

| No | Name | I/O | Description | No | Name | I/O | Description |
|----|--------------|-----|--|----|---------|-----|---|
| 1 | MDOU3 | O | Mode data3 out controlled by micom | 41 | PVDD | P | PLL logic block VDD power supply pin |
| 2 | SSTOP/PS0PS1 | I | Limit switch/sled position sensor input pin0 | 42 | PLCK | O | PLCK |
| 3 | PS1 | I | Sled motor position sensor input pin1 | 43 | PLLLOCK | O | Frequency lock detect output (H: lock, L: unlock) |
| 4 | TEST | I | Test pin (L: normal/H: test) | 44 | EFMRTD | O | Latched EFM output signal |
| 5 | COUT | O | Counter clock | 45 | PVSS | P | PLL logic block VSS power supply pin |
| 6 | FLKB | O | Focus servo lock signal output pin | 46 | R/VCO | I | Resistor pin for VCO gain |
| 7 | TLKB | O | Tracking servo lock signal output pin | 47 | RFD | I | Gain adjust resistor for frequency detector |
| 8 | PSB | I | 0: 1 Bit, 1: 8 Bit | 48 | RPD | I | Gain adjust resistor for phase detector |
| 9 | RSTB | I | System reset signal input pin | 49 | VCTL | I | control voltage for VCO |
| 10 | CSB | I | MICOM chip select pin | 50 | MAGIC0 | I | Input for controlling hysteresis of the FD output (for testing) |
| 11 | DAB | I | MICOM data/addrs select pin | 51 | EFMOA | I | EFM offset adjustment pin |
| 12 | MWRB | I | MICOM write clock signal input pin | 52 | TZCO | O | Tracking zero cross output pin |
| 13 | MRDB | I | MICOM read clock signal input pin | 53 | SVDD | P | Servo CPU VDD power supply pin |
| 14 | MDATA0 | I/O | MICOM data pin0 | 54 | EQCTL | O | EQ control signal |
| 15 | MDATA1 | I/O | MICOM data pin1 | 55 | EFMI | I | EFM signal for test |
| 16 | MDATA2 | I/O | MICOM data pin2 | 56 | EFMO | O | EFM signal |
| 17 | MDATA3 | I/O | MICOM data pin3 | 57 | LPFDVD | I | Asymmetric input signal for DVD |
| 18 | MDATA4 | I/O | MICOM data pin4 | 58 | LPFCD | I | Asymmetric input signal for CD |
| 19 | MDATA5 | I/O | MICOM data pin5 | 59 | RFI | I | RF input signal |
| 20 | MDATA6 | I/O | MICOM data pin6 | 60 | SVSS | P | Servo CPU VSS power supply pin |
| 21 | MDATA7 | I/O | MICOM data pin7 | 61 | AV/SS | P | Analog block /SS power supply pin |
| 22 | SENSE | O | Internal status monitor pin | 62 | SME | I | Spindle error input pin |
| 23 | DVDD | P | Servo logic & ROM VDD power supply pin | 63 | VREF | I | Reference voltage input pin |
| 24 | XI | I | System clock signal input pin | 64 | TE | I | Tracking error signal input pin |
| 25 | XO | O | System clock signal output pin | 65 | FE | I | Focus error signal input pin |
| 26 | XOUT | O | Clock out (32.988MHz) to DSP | 66 | ENV | I | RF envelope input pin |
| 27 | DVSS | P | Servo logic & ROM VSS power supply pin | 67 | TILT | I | TILT in (reserved) |
| 28 | SQCK | O | Clock output pin for subcode data read | 68 | AV/DD | P | Analog block /DD power supply pin |
| 29 | SQSI | I | Subcode data input pin | 69 | TILT | O | TILT out (reserved) |
| 30 | SCOR | I | Timing detection input pin for subcode data read | 70 | DV/CTL | O | Depth variation control signal output pin |
| 31 | SMON | I | Motor ON signal input pin | 71 | TBAL | O | Tracking balance signal output pin |
| 32 | LOCK | I | Lock signal input pin | 72 | FBAL | O | Focus balance signal output pin |
| 33 | DIRC | I | Direct jump control (for 1 track jump) | 73 | SID | O | Spindle motor drive signal output pin |
| 34 | FOKB | I | Focus OK signal input pin | 74 | SPD | O | Spindle motor drive signal output pin |
| 35 | FDCTL | I | PLL frequency detect control input pin | 75 | FOD | O | Focus actuator drive signal output pin |
| 36 | LDONB | O | Laser diode ON signal output pin | 76 | TRD | O | Tracking actuator drive signal output pin |
| 37 | DFCT | I | Defect detection signal input pin | 77 | TZCA | I | TE signal for tracking zero cross input pin |
| 38 | MIRR | I | Minor signal input pin | 78 | MDOUT0 | O | Mode data0 out controlled by micom |
| 39 | PLLHD | I | PLL hold signal from micom | 79 | MDOUT1 | O | Mode data1 out controlled by micom |
| 40 | INT0_224 | O | Servo interrupt/monitor pin | 80 | MDOUT2 | O | Mode data2 out controlled by micom |


| No | Name | I/O | Description |
|----|--------------|-----|--|
| 1 | MDOU3 | O | Mode data3 out controlled by micom |
| 2 | SSTOP/PS0PS1 | I | Limit switch/sled position sensor input pin0 |
| 3 | PS1 | I | Sled motor position sensor input pin1 |
| 4 | TEST | I | Test pin (L: normal/H: test) |
| 5 | COUT | O | Counter clock |
| 6 | FLKB | O | Focus servo lock signal output pin |
| 7 | TLKB | O | Tracking servo lock signal output pin |
| 8 | PSB | I | 0: 1 Bit, 1: 8 Bit |
| 9 | RSTB | I | System reset signal input pin |
| 10 | CSB | I | MICOM chip select pin |
| 11 | DAB | I | MICOM data/addrs select pin |
| 12 | MWRB | I | MICOM write clock signal input pin |
| 13 | MRDB | I | MICOM read clock signal input pin |
| 14 | MDATA0 | I/O | MICOM data pin0 |
| 15 | MDATA1 | I/O | MICOM data pin1 |
| 16 | MDATA2 | I/O | MICOM data pin2 |
| 17 | MDATA3 | I/O | MICOM data pin3 |
| 18 | MDATA4 | I/O | MICOM data pin4 |
| 19 | MDATA5 | I/O | MICOM data pin5 |
| 20 | MDATA6 | I/O | MICOM data pin6 |
| 21 | MDATA7 | I/O | MICOM data pin7 |
| 22 | SENSE | O | Internal status monitor pin |
| 23 | DVDD | P | Servo logic & ROM VDD power supply pin |
| 24 | XI | I | System clock signal input pin |
| 25 | XO | O | System clock signal output pin |
| 26 | XOUT | O | Clock out (32.988MHz) to DSP |
| 27 | DVSS | P | Servo logic & ROM VSS power supply pin |
| 28 | SQCK | O | Clock output pin for subcode data read |
| 29 | SQSI | I | Subcode data input pin |
| 30 | SCOR | I | Timing detection input pin for subcode data read |
| 31 | SMON | I | Motor ON signal input pin |
| 32 | LOCK | I | Lock signal input pin |
| 33 | DIRC | I | Direct jump control (for 1 track jump) |
| 34 | FOKB | I | Focus OK signal input pin |
| 35 | FDCTL | I | PLL frequency detect control input pin |
| 36 | LDONB | O | Laser diode ON signal output pin |
| 37 | DFCT | I | Defect detection signal input pin |
| 38 | MIRR | I | Minor signal input pin |
| 39 | PLLHD | I | PLL hold signal from micom |
| 40 | INT0_224 | O | Servo interrupt/monitor pin |

2-1-10 SIC4 (KA3017 ; Motor & Actuator Driver)

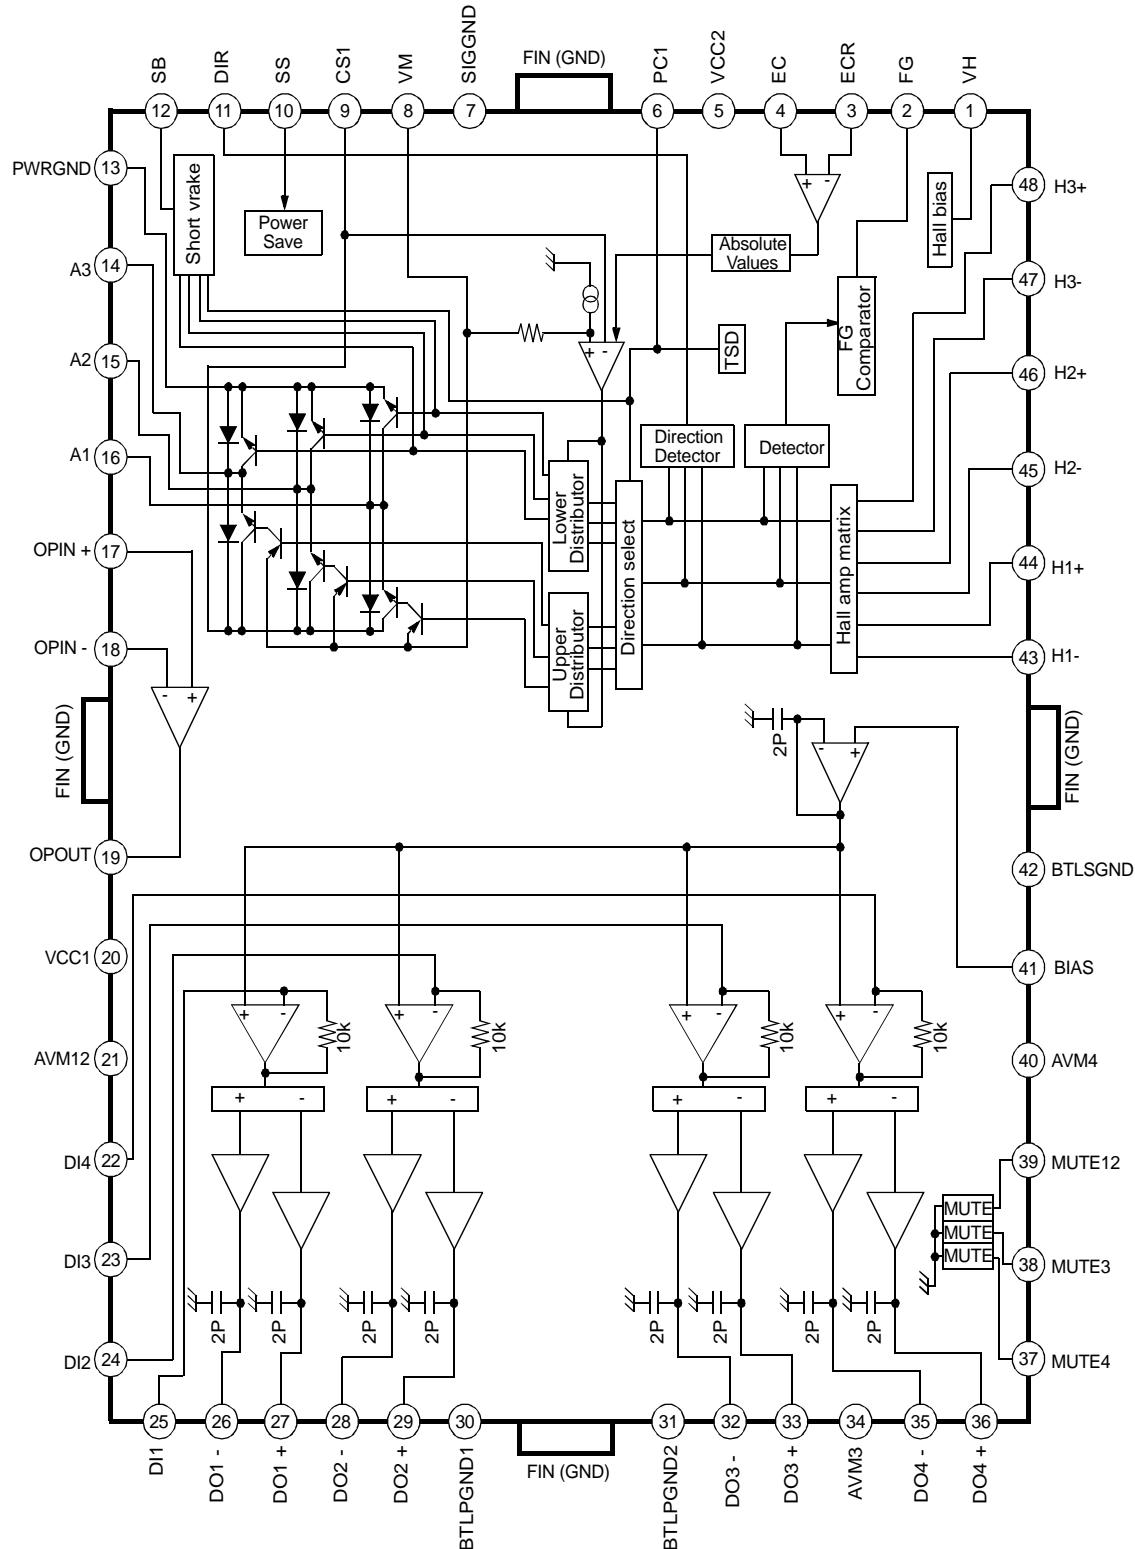

| No. | Symbol | I/O | Description |
|-----|----------|-----|-------------------------------------|
| 1 | VH | I | HALL BIAS |
| 2 | FG | O | FG SIGNAL OUTPUT |
| 3 | ECR | I | TORQUE CONTROL REFERENCE |
| 4 | EC | I | TORQUE CONTROL SIGNAL |
| 5 | VCC2 | — | SUPPLY VOLTAGE |
| 6 | PC1 | — | PHASE COMPENSATION CAPACITOR |
| 7 | SIGGND | — | SIGNAL GROUND |
| 8 | VM | — | MOTOR SUPPLY VOLTAGE |
| 9 | CS1 | I | CURRENT SENSOR |
| 10 | S/S | I | START/STOP |
| 11 | DIR | O | 3-PHASE ROTATIONAL DIRECTION OUTPUT |
| 12 | SB | I | SHORT BRAKE |
| 13 | PWRGND | — | POWER GROUND |
| 14 | A3 | O | 3-PHASE OUTPUT 3 |
| 15 | A2 | O | 3-PHASE OUTPUT 2 |
| 16 | A1 | O | 3-PHASE OUTPUT 1 |
| 17 | OPIN+ | I | OP AMP INPUT (+) |
| 18 | OPIN- | I | OP AMP INPUT (-) |
| 19 | OPOUT | O | OP AMP OUTPUT |
| 20 | VCC1 | — | SUPPLY VOLTAGE |
| 21 | AVM12 | — | BTL CH-1, 2 MOTOR SUPPLY VOLTAGE |
| 22 | DI4 | I | BTL DRIVE INPUT 4 |
| 23 | DI3 | I | BTL DRIVE INPUT 3 |
| 24 | DI2 | I | BTL DRIVE INPUT 2 |
| 25 | DI1 | I | BTL DRIVE INPUT 1 |
| 26 | DO1- | O | BTL DRIVE 1 OUTPUT (-) |
| 27 | DO1+ | O | BTL DRIVE 1 OUTPUT (+) |
| 28 | DO2- | O | BTL DRIVE 2 OUTPUT (-) |
| 29 | DO2+ | O | BTL DRIVE 2 OUTPUT (+) |
| 30 | BTLPGND1 | — | BTL POWER GROUND 1 |
| 31 | BTLPGND2 | — | BTL POWER GROUND 2 |
| 32 | DO3- | O | BTL DRIVE 3 OUTPUT (-) |
| 33 | DO3+ | O | BTL DRIVE 3 OUTPUT (+) |
| 34 | AVM3 | — | BTL CH3 MOTOR SUPPLY VOLTAGE |
| 35 | DO4- | O | BTL DRIVE 4 OUTPUT (-) |
| 36 | DO4+ | O | BTL DRIVE 4 OUTPUT (+) |
| 37 | MUTE4 | I | BTL DRIVE MUTE CH 4 |
| 38 | MUTE3 | I | BTL DRIVE MUTE CH 3 |
| 39 | MUTE12 | I | BTL DRIVE MUTE CH 1, 2 |
| 40 | AVM4 | — | BTL CH 4 MOTOR SUPPLY VOLTAGE |
| 41 | BIAS | — | BTL BIAS VOLTAGE |
| 42 | BTLSGND | — | BTL DRIVE SIGNAL GROUND |
| 43 | H1- | I | HALL1(-) INPUT |
| 44 | H1+ | I | HALL1(+) INPUT |
| 45 | H2- | I | HALL2(-) INPUT |
| 46 | H2+ | I | HALL2(+) INPUT |
| 47 | H3- | I | HALL3(-) INPUT |
| 48 | H3+ | I | HALL3(+) INPUT |

2-1-11 ZIC1 (ZIVA 4.1 ; A/V Decoder)

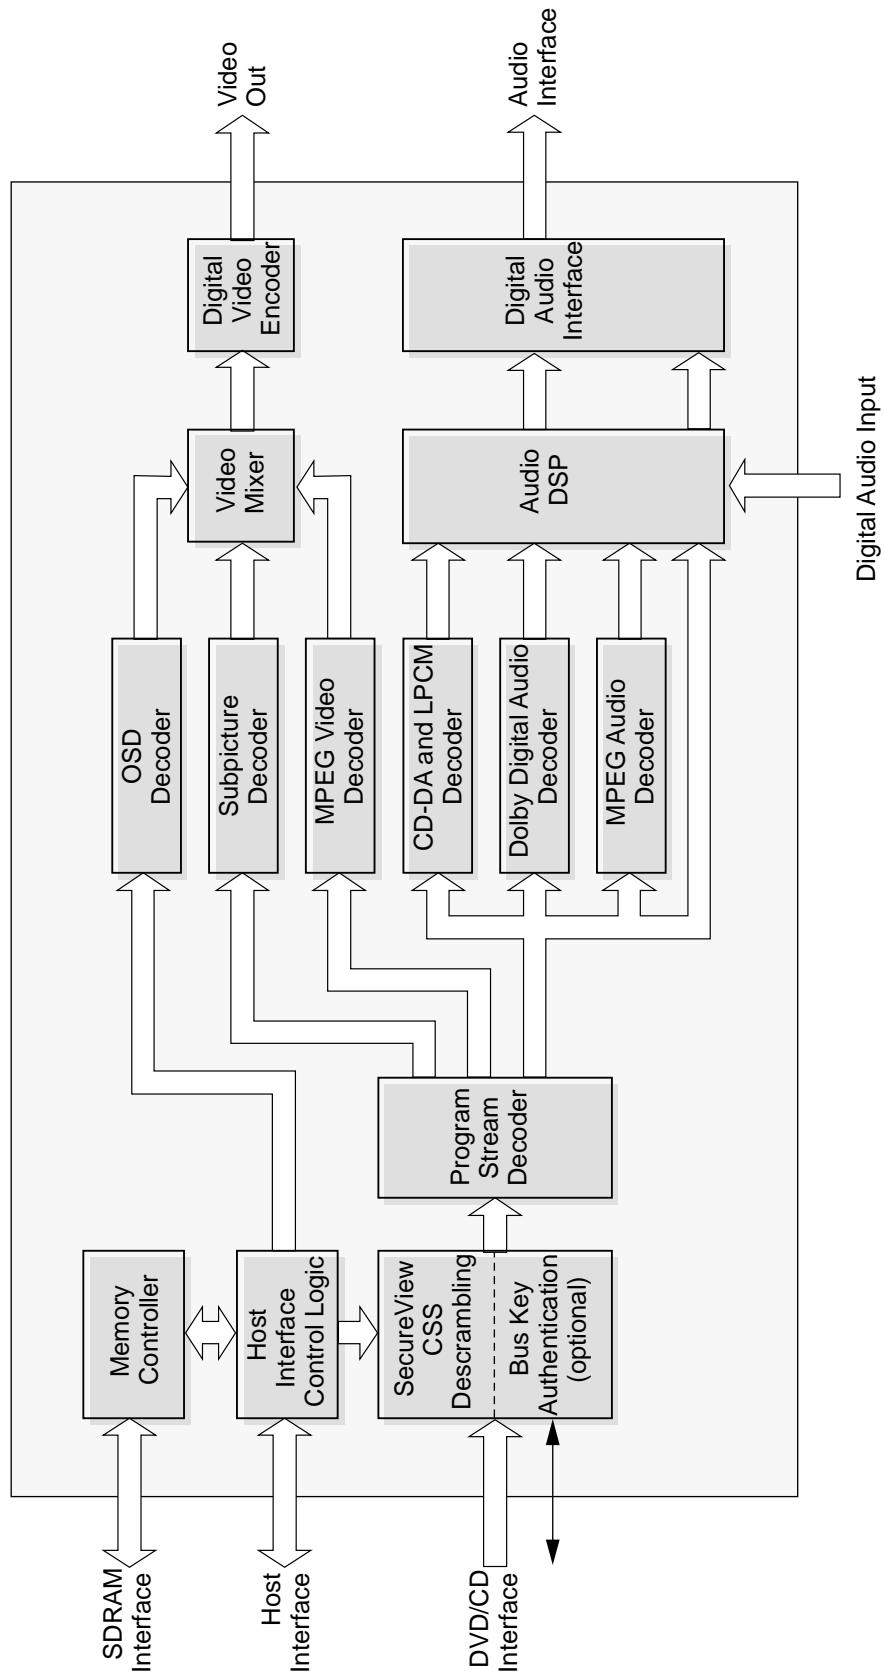


| Pin No. | Pin Name | I/O Voltage | I/O Type | I/O Voltage | I/O Type | Pin No. | Pin Name | I/O Voltage | I/O Type |
|---------|----------|-------------|-----------|-------------|----------------|---------|----------|-------------|------------|
| 1 | RD | 3.3V | I | 49 | PIO4 | 3.3V | SD-B5 | 3.3V | O |
| 2 | RW | 3.3V | I | 50 | PIO5 | 3.3V | MADDR10 | 3.3V | O |
| 3 | VDD_3.3 | 3.3V | | 51 | PIO6 | 3.3V | MADDR0 | 3.3V | O |
| 4 | WAIT | 3.3V | O, OD, PU | 52 | PIO7 | 3.3V | VDD_3.3 | 3.3V | |
| 5 | RESET | 3.3V | I | 53 | MDATA0 | 3.3V | VSS | GROUND | |
| 6 | VSS | GROUND | | 54 | MDATA1 | 3.3V | MADDR1 | 3.3V | O |
| 7 | VDD_3.3 | 3.3V | | 55 | VDD_3.3 | 3.3V | MADDR2 | 3.3V | O |
| 8 | INT | 3.3V | O, OD, PU | 56 | VSS | GROUND | MADDR3 | 3.3V | O |
| 9 | NC | No Connect | O | 57 | MDATA2 | 3.3V | RESERVED | ANALOG GND | |
| 10 | NC | No Connect | O | 58 | MDATA3 | 3.3V | VSS | NC | No Connect |
| 11 | NC | No Connect | O | 59 | MDATA4 | 3.3V | VSS | NC | No Connect |
| 12 | NC | No Connect | O | 60 | MDATA5 | 3.3V | RESERVED | 3.3V | I |
| 13 | VDD_2.5 | 2.5V | | 61 | MDATA6 | 3.3V | VSS | NC | No Connect |
| 14 | VSS | GROUND | | 62 | MDATA7 | 3.3V | RESERVED | 3.3V | I |
| 15 | NC | No Connect | O | 63 | MDATA15 | 3.3V | RESERVED | 3.3V ANALOG | |
| 16 | NC | No Connect | O | 64 | VDD_3.3 | 3.3V | RESERVED | 3.3V | I |
| 17 | NC | No Connect | O | 65 | VSS | GROUND | I/O | DAL-LRCK | 3.3V |
| 18 | NC | No Connect | O | 66 | MDATA14 | 3.3V | I/O | DAL-BCK | 3.3V |
| 19 | VSS | GROUND | | 67 | VDD_2.5 | 2.5V | VSS | GROUND | |
| 20 | VDD_3.3 | 3.3V | | 68 | VSS | GROUND | VSS | GROUND | |
| 21 | VDATA0 | 3.3V | O | 69 | MDATA13 | 3.3V | I/O | DAL-DATA | 3.3V |
| 22 | VDATA1 | 3.3V | O | 70 | MDATA12 | 3.3V | I/O | DA-DATA3 | 3.3V |
| 23 | VDATA2 | 3.3V | O | 71 | MDATA11 | 3.3V | I/O | DA-DAT42 | 3.3V |
| 24 | VDATA3 | 3.3V | O | 72 | MDATA10 | 3.3V | I/O | DA-DATA1 | 3.3V |
| 25 | VDATA4 | 3.3V | O | 73 | MDATA9 | 3.3V | I/O | DA-DATA0 | 3.3V |
| 26 | VDATA5 | 3.3V | O | 74 | VDD_3.3 | 3.3V | I/O | DA-LRCK | 3.3V |
| 27 | VDATA6 | 3.3V | O | 75 | VSS | GROUND | I/O | DA-IEC | 3.3V |
| 28 | VDATA7 | 3.3V | O | 76 | MDATA8 | 3.3V | I/O | VSS | GROUND |
| 29 | VSYNC | 3.3V | I/O | 77 | LDGM | 3.3V | O | DA-XCK | 3.3V |
| 30 | HSYNC | 3.3V | I/O | 78 | SD-CLK | 3.3V | O | DA-BCK | 3.3V |
| 31 | VSS | GROUND | | 79 | CLKSEL | 3.3V | I | DA-IEC | 3.3V |
| 32 | VDD_3.3 | 3.3V | | 80 | MADDR9 | 3.3V | O | VDD_2.5 | 2.5V |
| 33 | RESERVED | 3.3V | I | 81 | MADDR8 | 3.3V | O | VSS | GROUND |
| 34 | RESERVED | 3.3V | I | 82 | VDD_3.3 | 3.3V | O | DA-XCK | 3.3V |
| 35 | RESERVED | 3.3V | I | 83 | VSS | GROUND | O | DA-BCK | 3.3V |
| 36 | VDD_2.5 | 2.5V | | 84 | MADDR7 | 3.3V | O | DA-IEC | 3.3V |
| 37 | VSS | GROUND | | 85 | MADDR6 | 3.3V | O | VSS | GROUND |
| 38 | RESERVED | 3.3V | I | 86 | MADDR5 | 3.3V | O | DA-XCK | 3.3V |
| 39 | RESERVED | 3.3V | I | 87 | VDD_2.5 | 2.5V | O | DA-BCK | 3.3V |
| 40 | RESERVED | 3.3V | I | 88 | VSS | GROUND | O | DA-IEC | 3.3V |
| 41 | RESERVED | 3.3V | I | 89 | MADDR4 | 3.3V | O | VSS | GROUND |
| 42 | RESERVED | 3.3V | I | 90 | MWE | 3.3V | O | DA-XCK | 3.3V |
| 43 | PIO0 | 3.3V | I/O | 91 | SD-CAS | 3.3V | O | DA-BCK | 3.3V |
| 44 | VSS | GROUND | | 92 | VDD_3.3 | 3.3V | O | DA-IEC | 3.3V |
| 45 | VDD_3.3 | 3.3V | | 93 | VSS | GROUND | O | DA-XCK | 3.3V |
| 46 | PIO1 | 3.3V | I/O | 94 | SD-RAS | 3.3V | O | DA-BCK | 3.3V |
| 47 | PIO2 | 3.3V | I/O | 95 | SD-CS0 | 3.3V | O | DA-IEC | 3.3V |
| 48 | PIO3 | 3.3V | I/O | 96 | SD-CS1/MADDR11 | 3.3V | O | DA-XCK | 3.3V |

| Pin No. | Pin Name | I/O Voltage | I/O Type | I/O Voltage | I/O Type | Pin No. | Pin Name | I/O Voltage | I/O Type | |
|---------|----------|-------------|-----------|-------------|-----------|-------------|----------|-------------|---------------------|-------------|
| 1 | SYCLK | 3.3V | I | 97 | SD-B5 | 3.3V | O | 144 | VSS_VIDEO | ANALOG GND |
| 2 | SYCLKB | 3.3V | I | 98 | MADDR10 | 3.3V | O | 145 | Y/BU | 3.3V ANALOG |
| 3 | VDD_3.3 | 3.3V | | 99 | MADDR0 | 3.3V | O | 146 | VDD_DAC | 3.3V ANALOG |
| 4 | WAIT | 3.3V | O, OD, PU | 100 | VDD_3.3 | 3.3V | | 147 | VDD_VIDEO | 3.3V ANALOG |
| 5 | RESET | 3.3V | I | 101 | VSS | GROUND | | 148 | NC | No Connect |
| 6 | VSS | GROUND | | 102 | MADDR1 | 3.3V | O | 149 | VSS_DAC | ANALOG GND |
| 7 | VDD_3.3 | 3.3V | | 103 | MADDR2 | 3.3V | O | 150 | VSS_VIDEO | ANALOG GND |
| 8 | INT | 3.3V | O, OD, PU | 104 | MADDR3 | 3.3V | O | 151 | C/RN | 3.3V ANALOG |
| 9 | NC | No Connect | O | 105 | RESERVED | ANALOG GND | | 152 | VDD_DAC | 3.3V ANALOG |
| 10 | NC | No Connect | O | 106 | NC | No Connect | O | 153 | VDD_VIDEO | 3.3V ANALOG |
| 11 | NC | No Connect | O | 107 | NC | No Connect | O | 154 | VSS_REF | ANALOG GND |
| 12 | NC | No Connect | O | 108 | RESERVED | 3.3V | I | 155 | RREF | 3.3V ANALOG |
| 13 | VDD_2.5 | 2.5V | | 109 | NC | No Connect | O | 156 | VDD_REF | 3.3V ANALOG |
| 14 | VSS | GROUND | | 110 | RESERVED | 3.3V | I | 157 | A_VSS | GROUND |
| 15 | NC | No Connect | O | 111 | RESERVED | 3.3V ANALOG | | 158 | SYNSCLK | 3.3V |
| 16 | NC | No Connect | O | 112 | RESERVED | 3.3V | I | 159 | VCLK | 3.3V |
| 17 | NC | No Connect | O | 113 | DAL-LRCK | 3.3V | I/O | 160 | A_VDD | 3.3V ANALOG |
| 18 | NC | No Connect | O | 114 | DAL-BCK | 3.3V | I/O | 161 | DVD-DATA0/CDG-DATA | 3.3V |
| 19 | VSS | GROUND | | 115 | VDD_3.3 | 3.3V | | 162 | DVD-DATA1/CD-LRCK | 3.3V |
| 20 | VDD_3.3 | 3.3V | | 116 | VSS | GROUND | | 163 | DVD-DATA2/CD-BCK | 3.3V |
| 21 | VDATA0 | 3.3V | O | 117 | DAL-DATA | 3.3V | I/O | 164 | DVD-DATA3/CD-C2P0 | 3.3V |
| 22 | VDATA1 | 3.3V | O | 118 | DA-DATA3 | 3.3V | O | 165 | DVD-DATA4/CDG-SDATA | 3.3V |
| 23 | VDATA2 | 3.3V | O | 119 | DA-DAT42 | 3.3V | O | 166 | VSS | GROUND |
| 24 | VDATA3 | 3.3V | O | 120 | DA-DATA1 | 3.3V | O | 167 | VDD_3.3 | 3.3V |
| 25 | VDATA4 | 3.3V | O | 121 | DA-DATA0 | 3.3V | O | 168 | DVD-DATA5/CDG-VFSY | 3.3V |
| 26 | VDATA5 | 3.3V | O | 122 | DA-LRCK | 3.3V | O | 169 | DVD-DATA6/CDG-S0S1 | 3.3V |
| 27 | VDATA6 | 3.3V | O | 123 | VDD_3.3 | 3.3V | | 170 | DVD-DATA7/CDG-SCLK | 3.3V |
| 28 | VDATA7 | 3.3V | O | 124 | VSS | GROUND | | 171 | VBACK | 3.3V |
| 29 | VSYNC | 3.3V | I/O | 125 | DA-XCK | 3.3V | I/O | 172 | VREQUEST | 3.3V |
| 30 | HSYNC | 3.3V | I/O | 126 | DA-BCK | 3.3V | O | 173 | VSTROBE | 3.3V |
| 31 | VSS | GROUND | | 127 | DA-IEC | 3.3V | O | 174 | ERROR | 3.3V |
| 32 | VDD_3.3 | 3.3V | | 128 | VDD_2.5 | 2.5V | | 175 | VDD_3.3 | 3.3V |
| 33 | RESERVED | 3.3V | I | 129 | VSS | GROUND | | 176 | RESERVED | GROUND |
| 34 | RESERVED | 3.3V | I | 130 | NC | No Connect | O | 177 | VDD_3.3 | 3.3V |
| 35 | RESERVED | 3.3V | I | 131 | VSS_DAC | ANALOG GND | | 178 | VSS | GROUND |
| 36 | VDD_2.5 | 2.5V | | 132 | VSS_VIDEO | ANALOG GND | | 179 | NC | No connect |
| 37 | VSS | GROUND | | 133 | CVBS_SYNC | 3.3V ANALOG | O | 180 | NC | No connect |
| 38 | RESERVED | 3.3V | I | 134 | VDD_DAC | 3.3V ANALOG | O | 181 | NC | No connect |
| 39 | RESERVED | 3.3V | I | 135 | VDD_VIDEO | 3.3V ANALOG | | 182 | HADDR0 | 3.3V |
| 40 | RESERVED | 3.3V | I | 136 | NC | No Connect | O | 183 | HADDR1 | 3.3V |
| 41 | RESERVED | 3.3V | I | 137 | VSS_DAC | ANALOG GND | | 184 | HADDR2 | 3.3V |
| 42 | RESERVED | 3.3V | I | 138 | VSS_VIDEO | ANALOG GND | | 185 | RESERVED | 3.3V |
| 43 | PIO0 | 3.3V | I/O | 139 | CVBS/GY | 3.3V ANALOG | O | 186 | RESERVED | 3.3V |
| 44 | VSS | GROUND | | 140 | VDD_DAC | 3.3V ANALOG | | 187 | RESERVED | 3.3V |
| 45 | VDD_3.3 | 3.3V | | 141 | VDD_VIDEO | 3.3V ANALOG | | 188 | VSS | GROUND |
| 46 | PIO1 | 3.3V | I/O | 142 | NC | No Connect | O | 189 | VDD_2.5 | 2.5V |
| 47 | PIO2 | 3.3V | I/O | 143 | VSS_DAC | ANALOG GND | | 190 | RESERVED | 3.3V |
| 48 | PIO3 | 3.3V | I/O | 144 | VSS_VIDEO | ANALOG GND | | | | |

| Pin No. | Pin Name | I/O Voltage | I/O Type |
|---------|----------|-------------|----------|
| 191 | VSS | GROUND | |
| 192 | VDD_3.3 | 3.3V | |
| 193 | RESERVED | 3.3V | I |
| 194 | RESERVED | 3.3V | I |
| 195 | RESERVED | 3.3V | I |
| 196 | RESERVED | 3.3V | I |
| 197 | HDATA7 | 3.3V | I/O |
| 198 | VSS | GROUND | |
| 199 | HDATA6 | 3.3V | I/O |
| 200 | HDATA5 | 3.3V | I/O |
| 201 | HDATA4 | 3.3V | I/O |
| 202 | HDATA3 | 3.3V | I/O |
| 203 | HDATA2 | 3.3V | I/O |
| 204 | VDD_3.3 | 3.3V | |
| 205 | VSS | 3.3V | |
| 206 | HDATA1 | 3.3V | I/O |
| 207 | HDATA0 | 3.3V | I/O |
| 208 | CS | 3.3V | I |

2-1-12 ZIC2/ZIC3 (KM416S1120D ; CMOS 16M SDRAM)

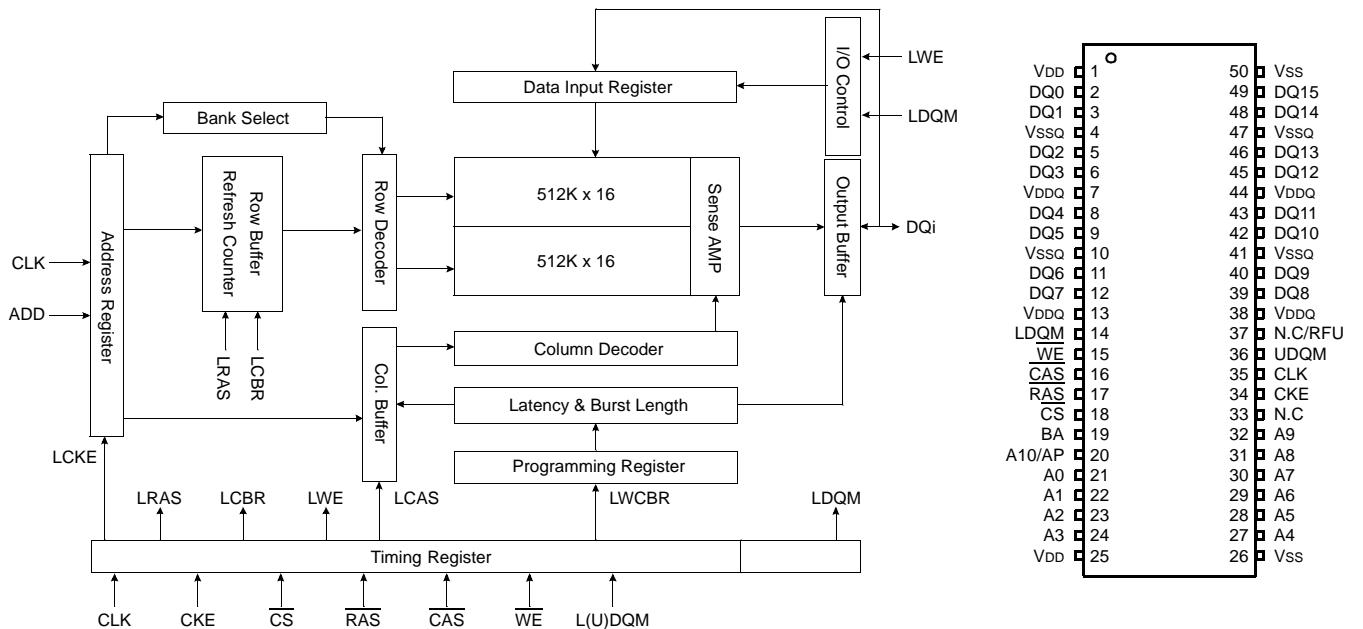

| Pin | Name | Input Function |
|-------------|---|---|
| CLK | System Clock | Active on the positive going edge to sample all inputs. |
| CS | Chip Select | Disables or enables device operation by masking or enabling all inputs except CLK, CKE and L(U)DQM |
| CKE | Clock Enable | Masks system clock to freeze operation from the next clock cycle. CKE should be enabled at least one cycle prior to new command. Disable input buffers for power down in standby. |
| A0 ~ A10/AP | Address | Row / column addresses are multiplexed on the same pins. Row address : RA0 ~ RA10, column address : CA0 ~ CA7 |
| BA | Bank Select Address | Selects bank to be activated during row address latch time. Selects bank for read/write during column address latch time. |
| <u>RAS</u> | Row Address Strobe | Latches row addresses on the positive going edge of the CLK with <u>RAS</u> low. Enables row access & precharge. |
| <u>CAS</u> | Column Address Strobe | Latches column addresses on the positive going edge of the CLK with <u>CAS</u> low. Enables column access. |
| <u>WE</u> | Write Enable | Enables write operation and row precharge. Latches data in starting from CAS, WE active. |
| L(U)DQM | Data Input/Output Mask | Makes data output Hi-Z, tSHZ after the clock and masks the output. Blocks data input when L(U)DQM active. |
| DQ0 ~ 15 | Data Input/Output | Data inputs/outputs are multiplexed on the same pins. |
| VDD/Vss | Power Supply/Ground | Power and ground for the input buffers and the core logic. |
| VDDQ/VSSQ | Data Output Power/Ground | Isolated power supply and ground for the output buffers to provide improved noise immunity. |
| N.C./RFU | No Connection/ Reserved for Future Use | This pin is recommended to be left No Connection on the device. |

MEMO

3. Product Specifications

| | | |
|---------------------|---------------------------------|---|
| GENERAL | Power Requirements | AC 120V, 60Hz |
| | Power Consumption | 17W |
| | Weight | 3.1kg |
| | Dimensions | W 430mm X D 280mm X 89mm |
| | Operating Temperature Range | +5°C ~ +35°C |
| | Operating Humidity Range | 10% to 75% |
| DISC | DVD (Digital Versatile Disc) | Reading Speed : 3.49 m/sec Approx. Play Time (Single Sided, Single Layer Disc) : 135 min. |
| | CD : 12Cm (Compact Disc) | Reading Speed : 1.2 to 1.4 m/sec Maximum Play Time : 74min. |
| | CD : 8Cm (Compact Disc) | Reading Speed : 1.2to 1.4 m/sec. Maximum Play Time : 20min. |
| | VCD : 12Cm | Reading Speed : 1.2 to 1.4 m/sec. Maximum Play Time : 74min. (Video + Audio) |
| | Composite Video | 1 channel : 1.0Vp-p (75ohm load) |
| | Component Video | Y : 1.0Vp-p (75ohm load) ; DVD-611 Only Pr : 0.70Vp-p (75ohm load) ; DVD-611 Only Pb : 0.70Vp-p (75ohm load) ; DVD-611 Only |
| Video Output | S-Video | Luminance Signal : 1Vp-p (75ohm load) Color Signal : 0.286Vp-p (75ohm load) |
| | 2 Channel | L (1/L), R (2/R) |
| | * Frequency Response | 48KHz Sampling : 4Hz to 22 KHz 96KHz Sampling : 4Hz to 44KHz |
| | * S/N Ratio | 115dB |
| | * Dynamic Range | 105dB |
| | * Total Harmonic Distortion | 0.003% |

* : Nominal specification

MEMO

3. Product Specifications

| | | |
|---------------------|---------------------------------|---|
| GENERAL | Power Requirements | AC 120V, 60Hz |
| | Power Consumption | 17W |
| | Weight | 3.1kg |
| | Dimensions | W 430mm X D 280mm X 89mm |
| | Operating Temperature Range | +5°C ~ +35°C |
| | Operating Humidity Range | 10% to 75% |
| DISC | DVD (Digital Versatile Disc) | Reading Speed : 3.49 m/sec Approx. Play Time (Single Sided, Single Layer Disc) : 135 min. |
| | CD : 12Cm (Compact Disc) | Reading Speed : 1.2 to 1.4 m/sec Maximum Play Time : 74min. |
| | CD : 8Cm (Compact Disc) | Reading Speed : 1.2to 1.4 m/sec. Maximum Play Time : 20min. |
| | VCD : 12Cm | Reading Speed : 1.2 to 1.4 m/sec. Maximum Play Time : 74min. (Video + Audio) |
| | Composite Video | 1 channel : 1.0Vp-p (75ohm load) |
| | Component Video | Y : 1.0Vp-p (75ohm load) ; DVD-611 Only Pr : 0.70Vp-p (75ohm load) ; DVD-611 Only Pb : 0.70Vp-p (75ohm load) ; DVD-611 Only |
| Video Output | S-Video | Luminance Signal : 1Vp-p (75ohm load) Color Signal : 0.286Vp-p (75ohm load) |
| | 2 Channel | L (1/L), R (2/R) |
| | * Frequency Response | 48KHz Sampling : 4Hz to 22 KHz 96KHz Sampling : 4Hz to 44KHz |
| | * S/N Ratio | 115dB |
| | * Dynamic Range | 105dB |
| | * Total Harmonic Distortion | 0.003% |

* : Nominal specification

MEMO

4. Disassembly and Reassembly

4-1 Cabinet and PCB

Note : Reassembly in reverse order.

4-1-1 Top Cabinet Removal

- 1) Remove 3 Screws ① on the back Top Cabinet.
- 2) Remove 2 Screws ②, ③ on the left and right side.
- 3) Lift up the Top Cabinet in direction of arrow.

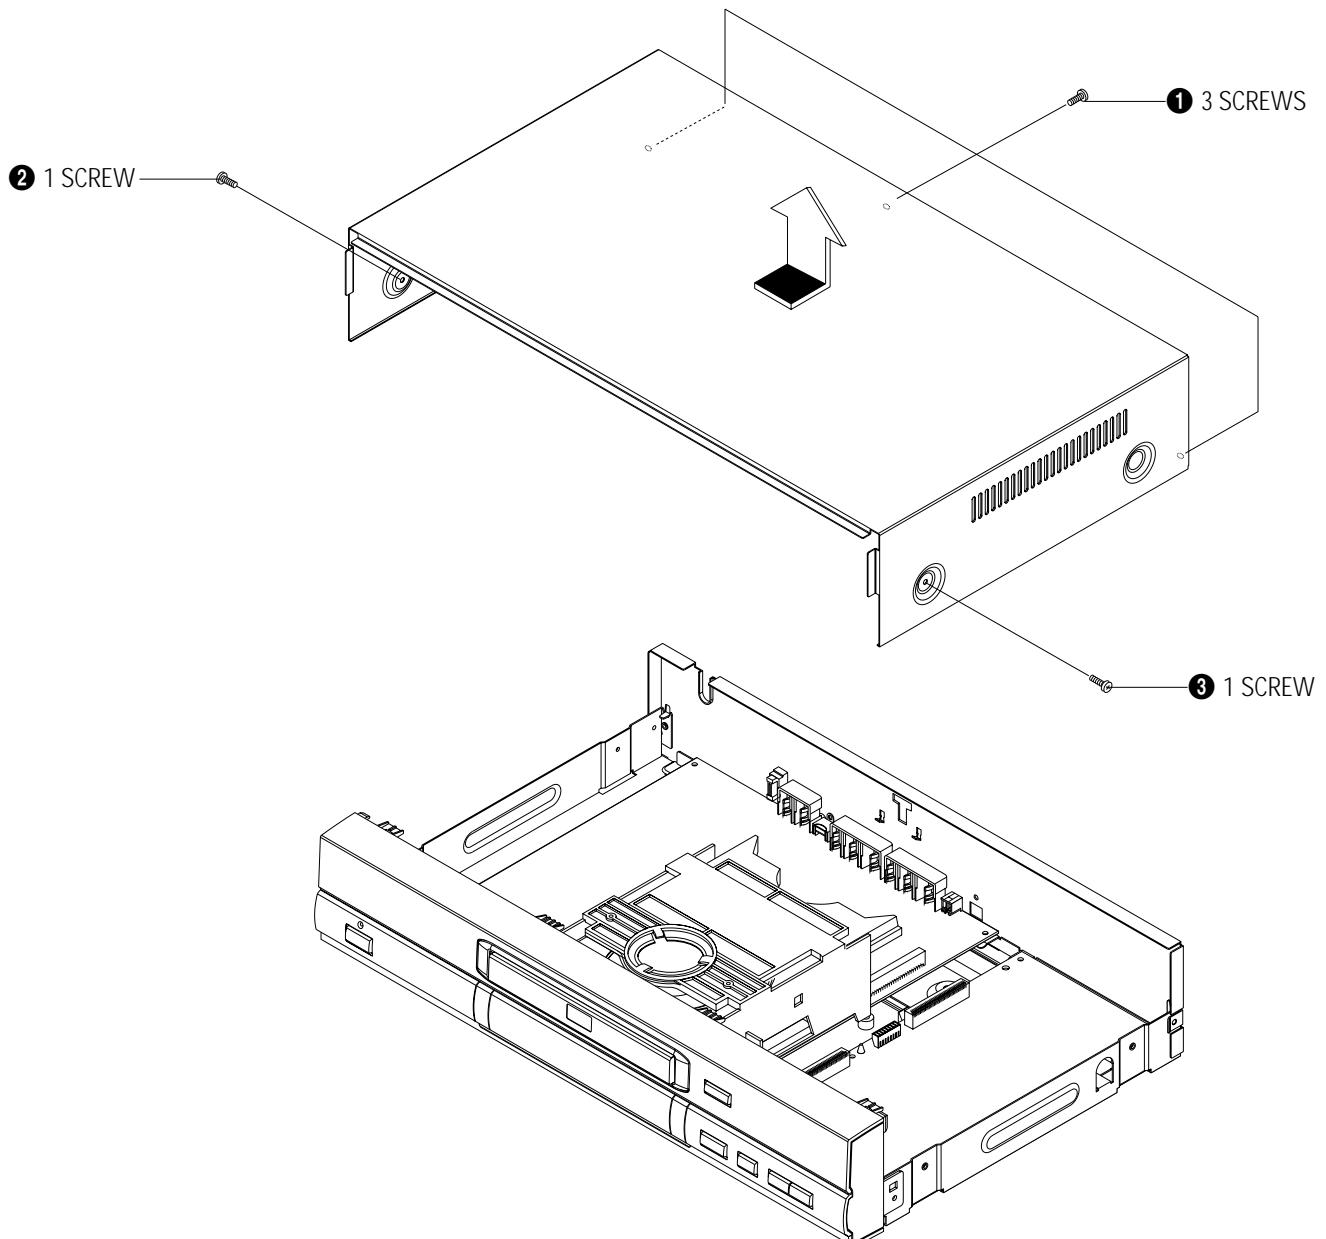


Fig. 4-1 Top Cabinet Removal

4-1-2 Door-Tray Removal

- 1) Supply power and open Tray **①**.
- 2) Disassemble the Door-Tray **②** in direction of arrow "A".
- 3) Close Tray **①** and power off.

Note : If Tray **①** doesn't open, insert a Screw driver **④** into the Emergency hole **③** (as shown in detailed drawing) and then push it in the direction of arrow "B". Open Tray manually.

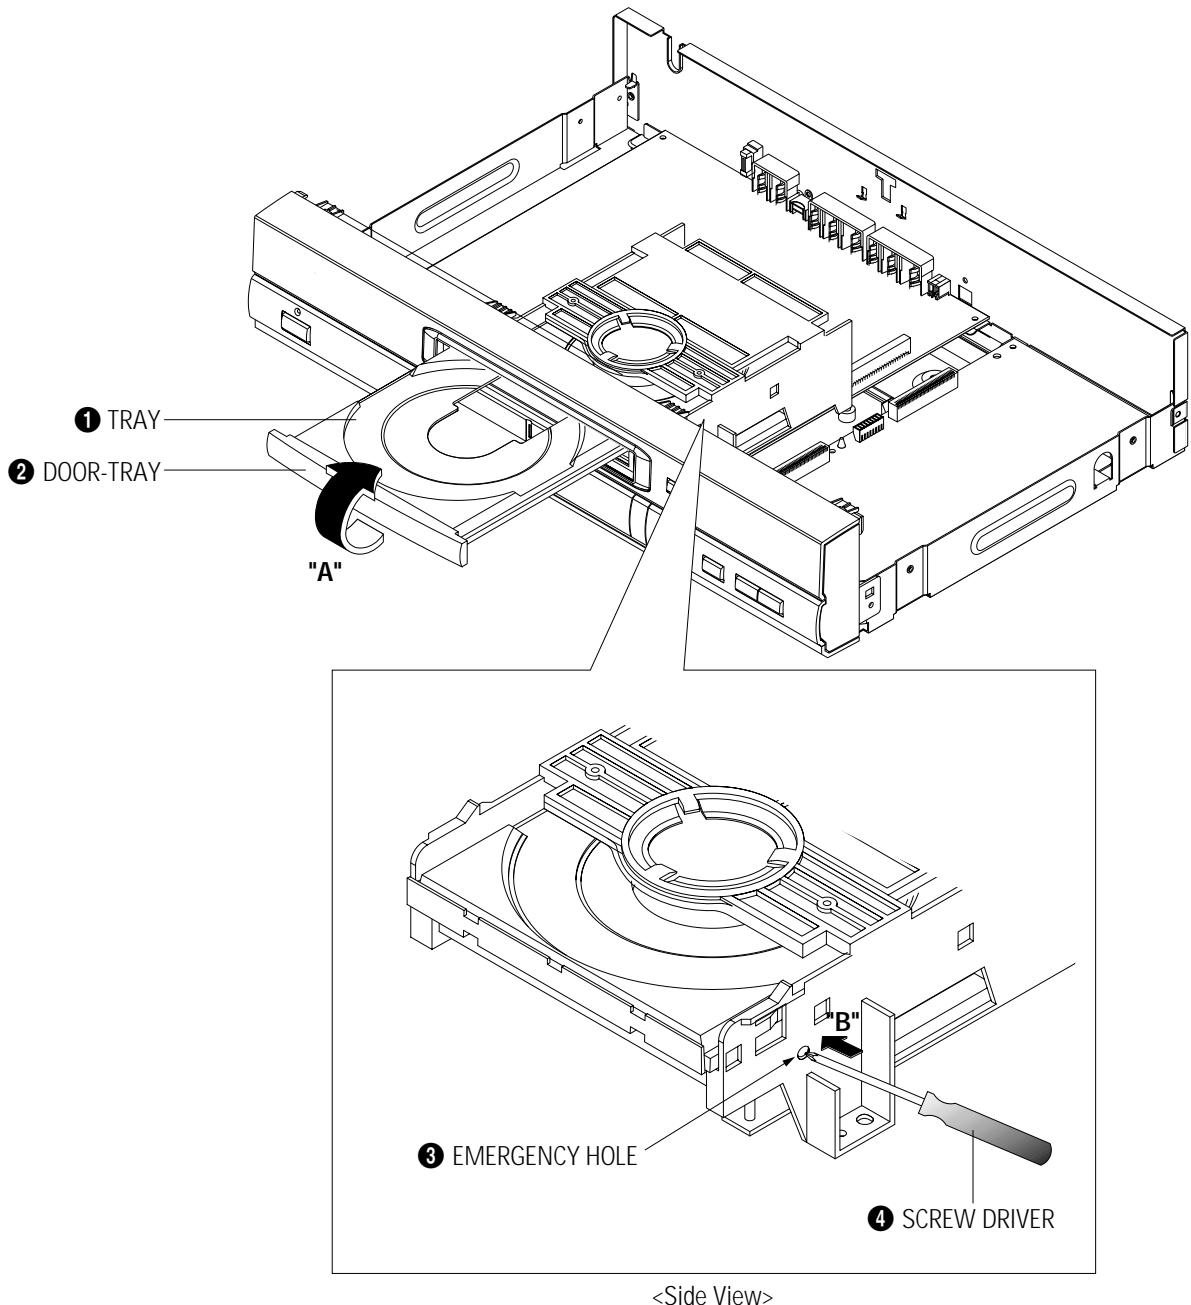


Fig. 4-2 Door-Tray Removal

4-1-3 Ass'y Front-Panel, Key PCB Removal

- 1) Remove Ass'y Front-Panel **①**.
- 2) Remove 5 Screws **②** and Key PCB **③**.

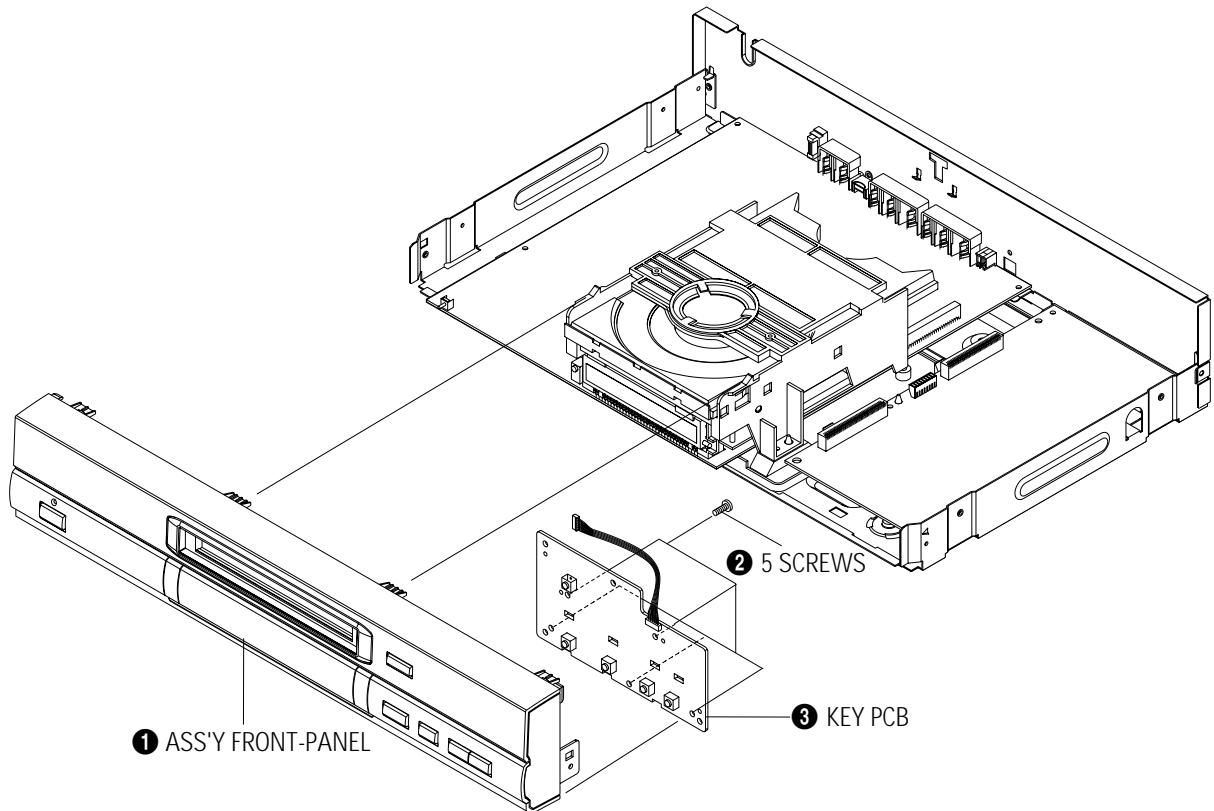


Fig. 4-3 Ass'y Front-Panel, Key PCB Removal

4-1-4 Ass'y Deck Removal

1) Remove 4 Screws ① from the Ass'y Deck and lift it up.

CAUTIONS :

- (1) When disassembling, switch the SW3 to "OFF" on the Deck PCB and remove the FPC connected to DCN1 on Main PCB.
(2) When assembling, insert the FPC into the DCN1 on Main PCB and switch SW3 to "ON" on the Deck PCB.

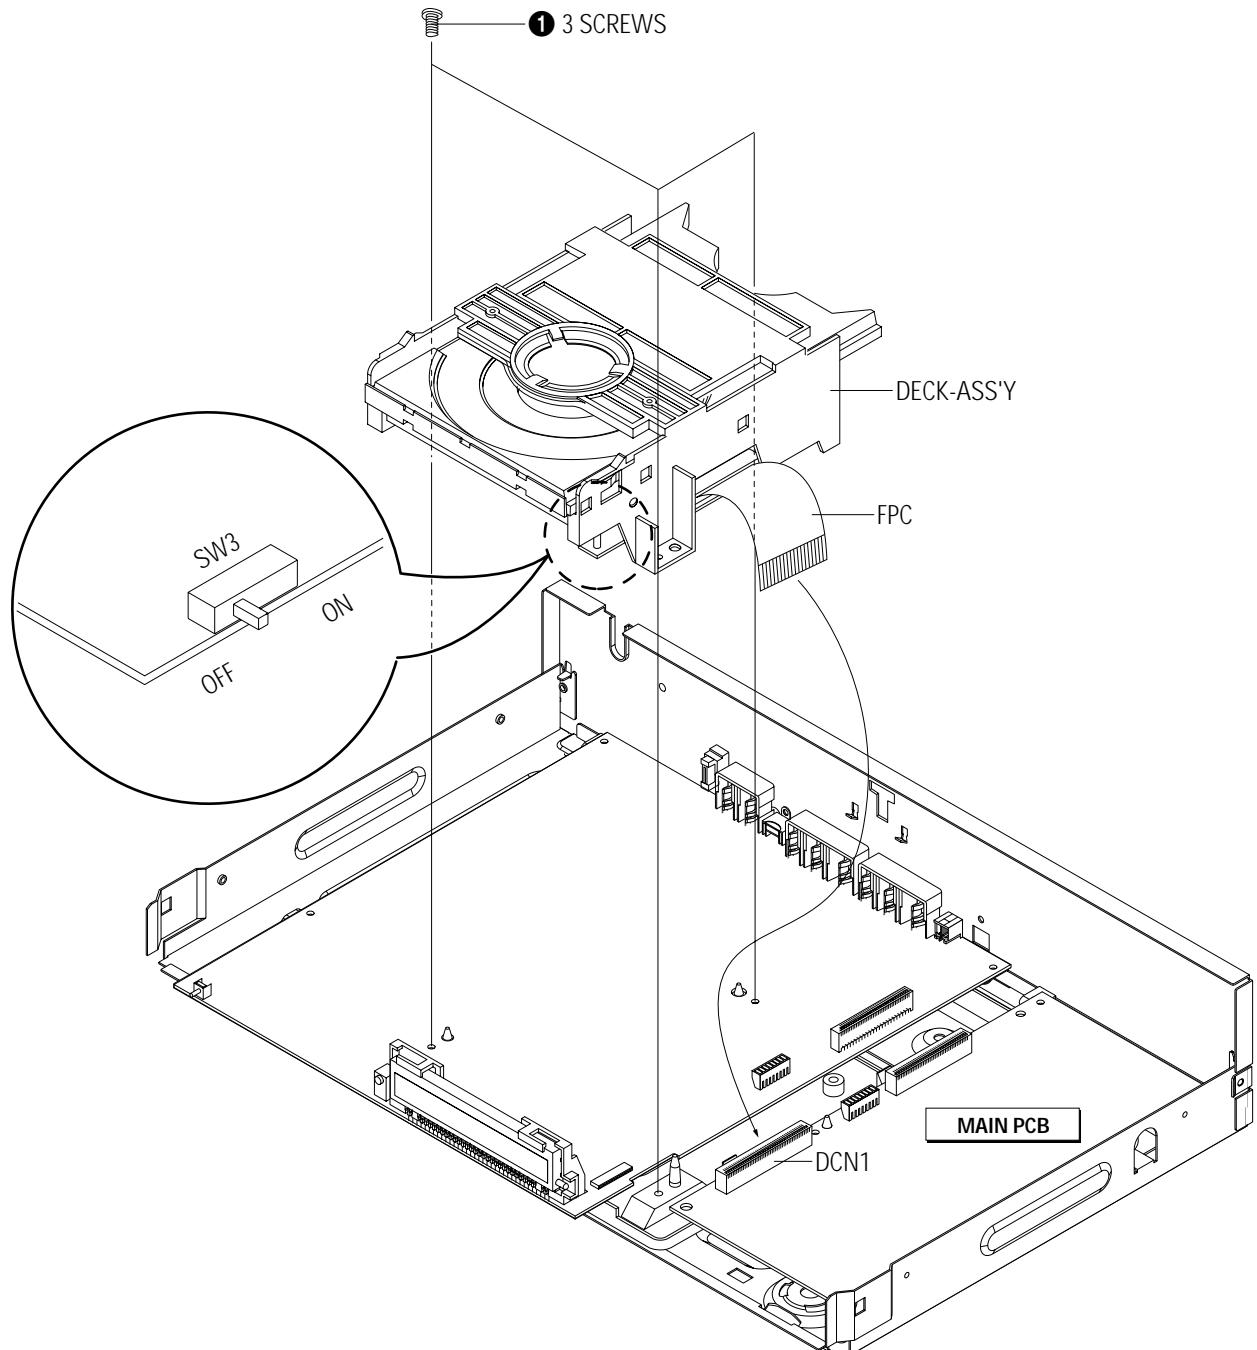


Fig. 4-4 Ass'y Deck Removal

4-1-5 Main PCB, Jack PCB Removal

- 1) Remove 1 Screw ①.
- 2) Remove 2 Screws ② and lift up the Jack PCB ③.
- 3) Remove 3 Screws ④ and lift up the Main PCB ⑤.

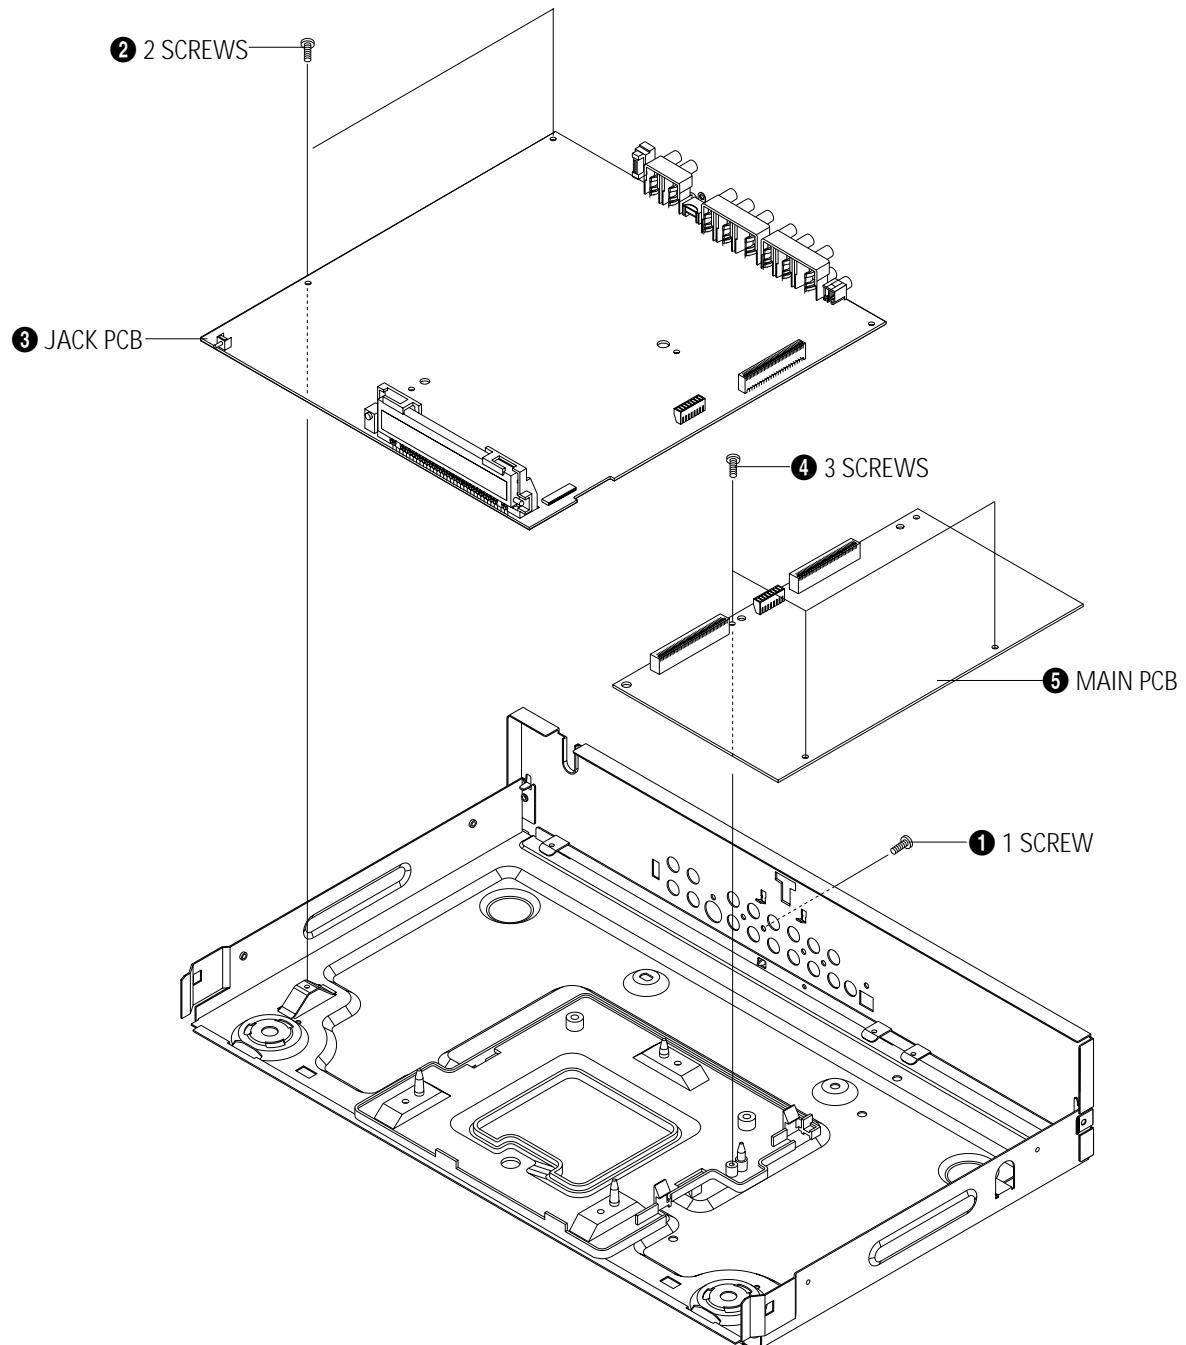


Fig. 4-5 Main PCB, Jack PCB Removal

4-2 PCB Location


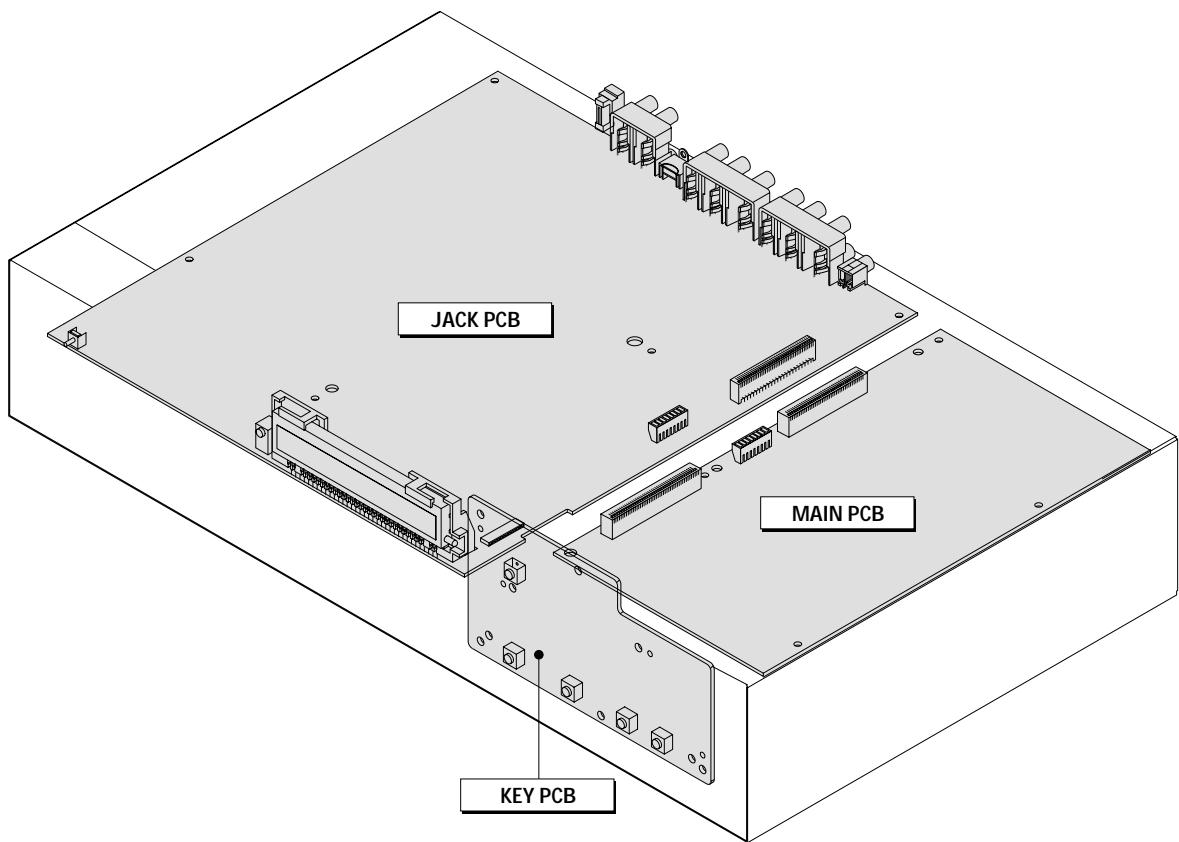


Fig. 4-6 PCB Location

4-3 Connector Diagram

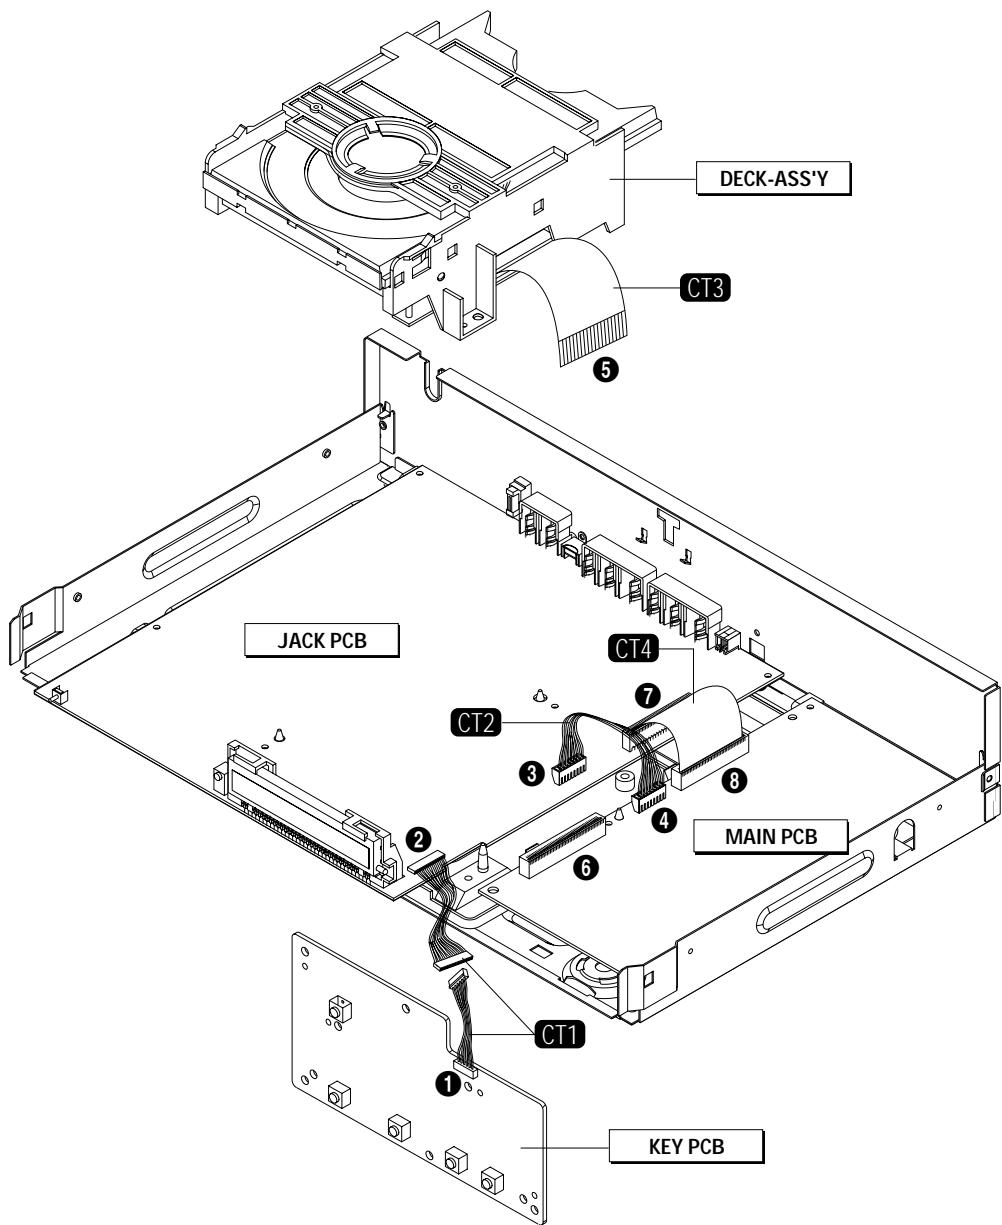

| NO. | CONNECTOR NO. | DIRECTION | CONNECTOR NO. | NO. |
|-----|---------------|-----------------------------|---------------|-----|
| ① | CON21 | KEY PCB ← CT1 → JACK PCB | CN2 | ② |
| ③ | PCNS1 | JACK PCB ← CT2 → MAIN PCB | PCN1 | ④ |
| ⑤ | FPC | DECK-ASS'Y ← CT3 → MAIN PCB | DCN1 | ⑥ |
| ⑦ | CN1 | JACK PCB ← CT4 → MAIN PCB | CN8 | ⑧ |

Fig. 4-7 Connector Diagram

4-4 Deck

4-4-1 PCB Deck Ass'y and Ass'y P/U Deck Removal

- 1) Remove the soldering of SLED+, SLED-, ① and TM+, TM-, ②.
- 2) Disconnect CN3 ③, CN2 ④.
- 3) Remove 1 Screw ⑤ and lift up the PCB Deck ⑥.
- 4) Remove 1 Screw ⑦.
- 5) Push the Hook ⑧ in the direction of arrow "A" and lift up the Ass'y P/U Deck ⑨ in direction of arrow "B".

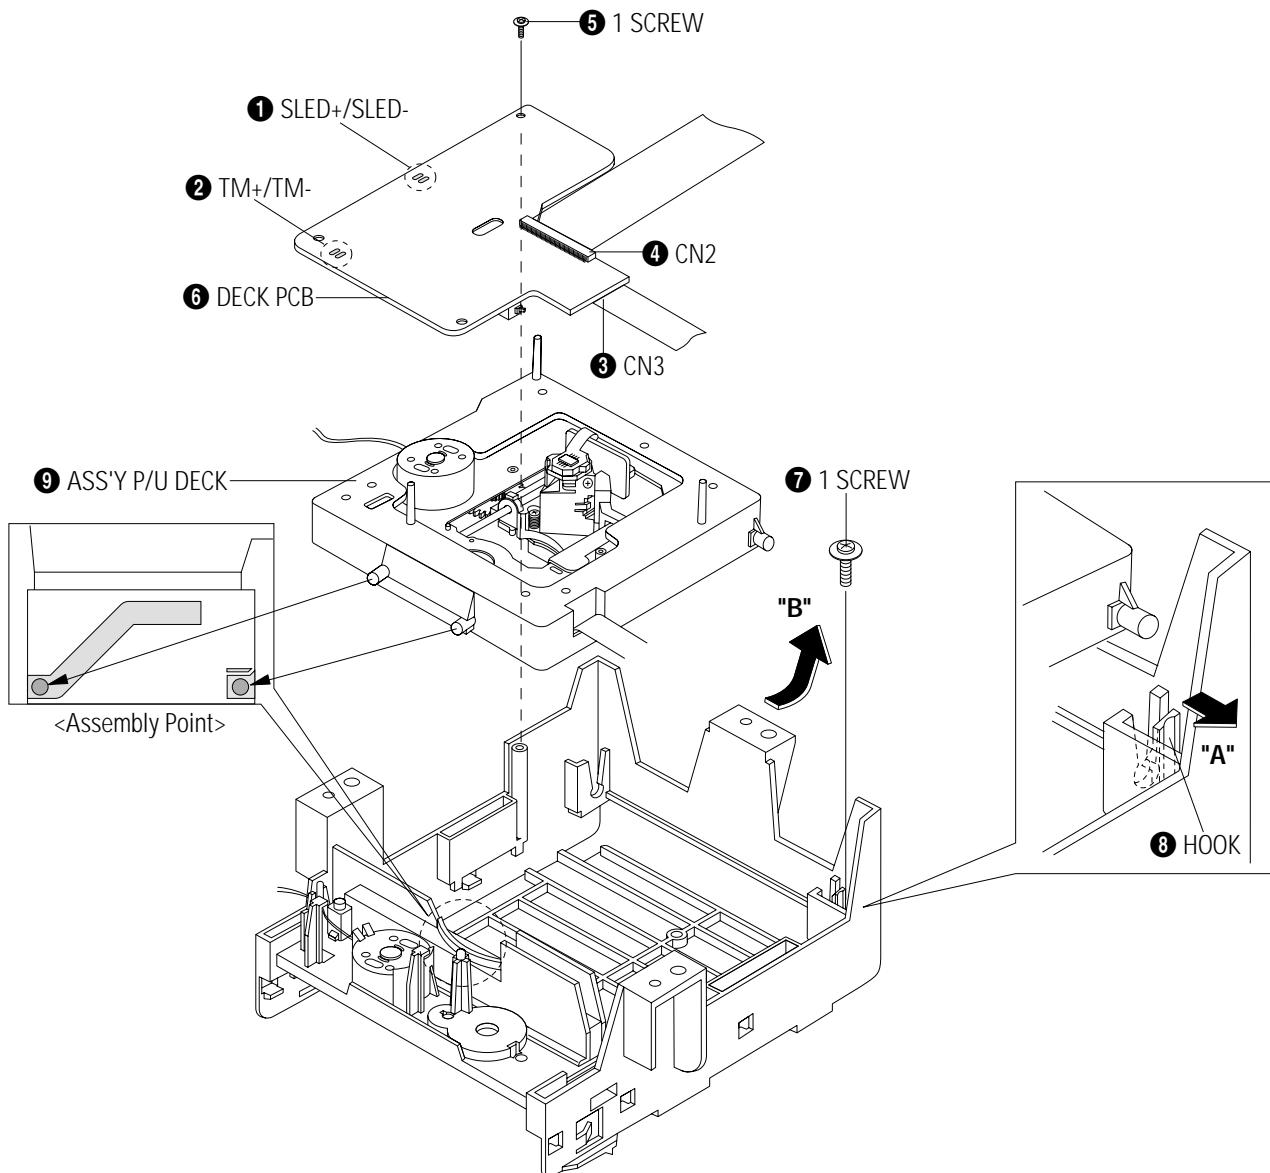


Fig. 4-8 PCB Deck Ass'y and Ass'y P/U Deck Removal

4-4-2 Tray Disc Removal

- 1) Insert a Screw Driver ① into Emergency Hole ② and push the Slider Housing ③ in the direction arrow "A".
- 2) When the Tray Disc ④ comes out little, pull it in the direction arrow "B" by hand.
- 3) Pull the Tray Disc ④ to disassemble , while simultaneously pushing 2 Stoppers ⑤ (left, right) in the direction arrow "C", "D".

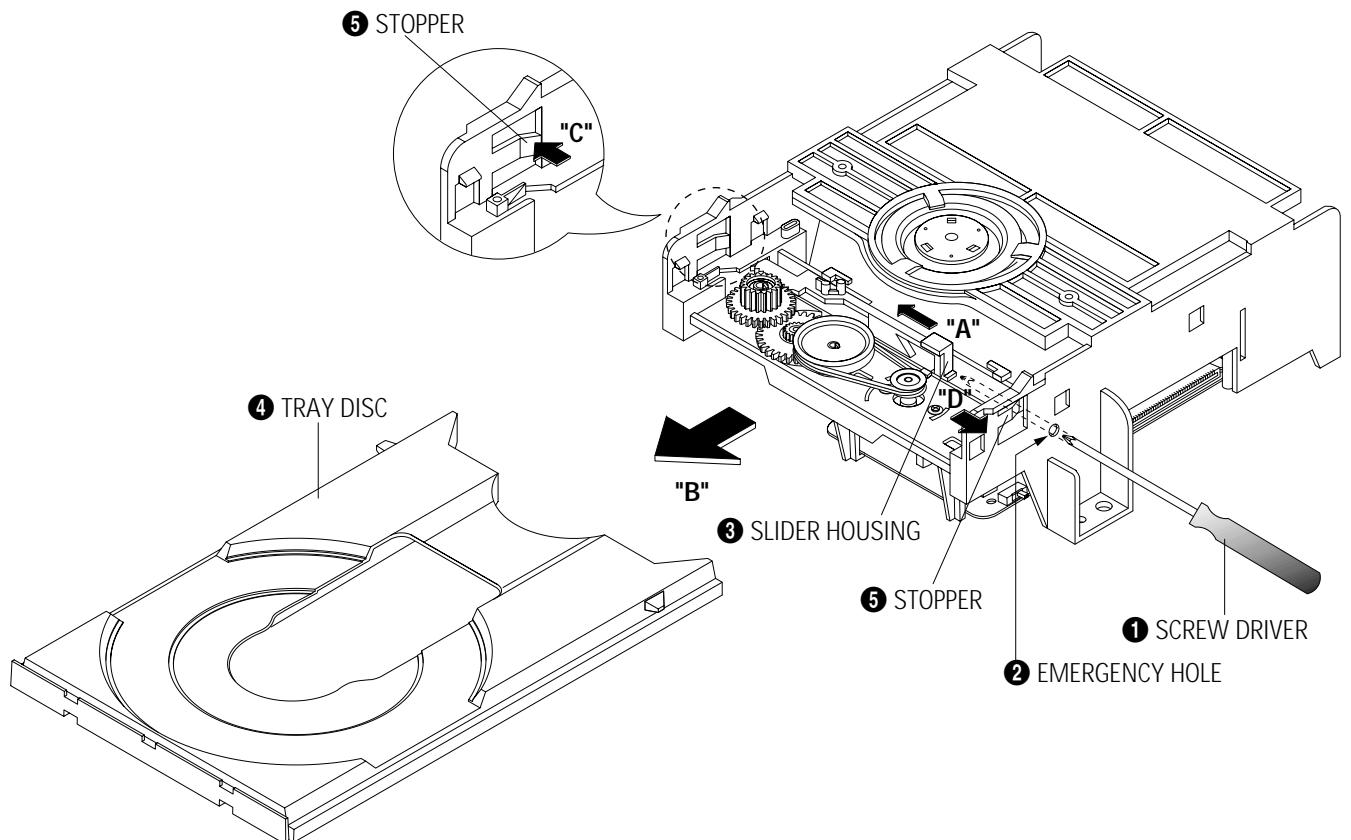


Fig. 4-9 Tray Disc Removal

4-4-3 Slider Housing Removal

- 1) Push the Slider Housing ① in the direction arrow "A".
- 2) Lift up the Slider Housing ①.

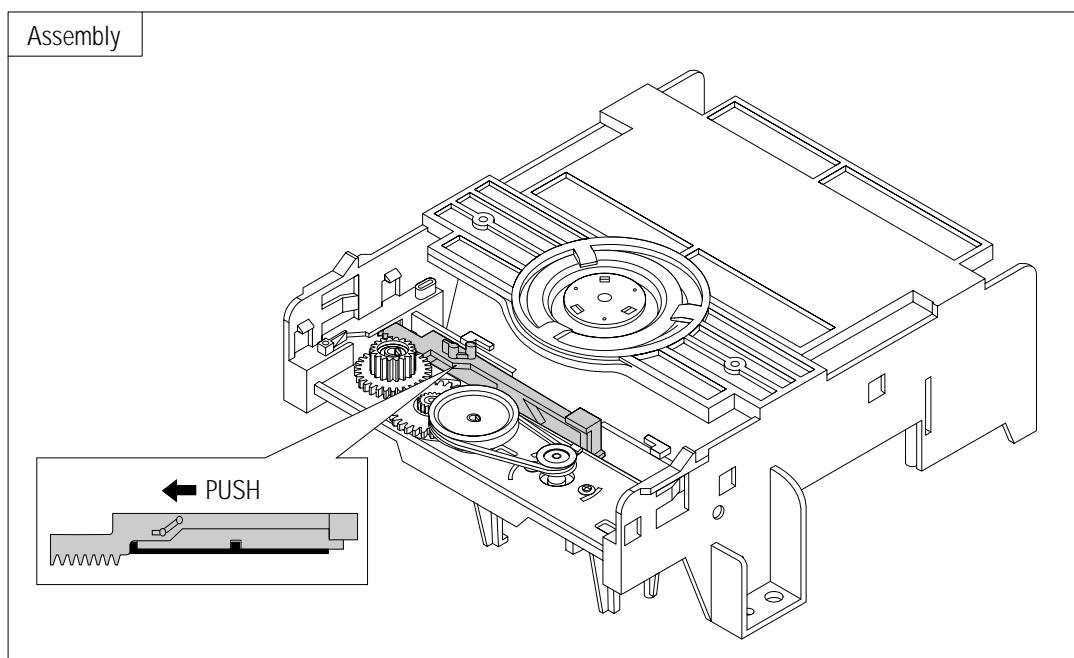
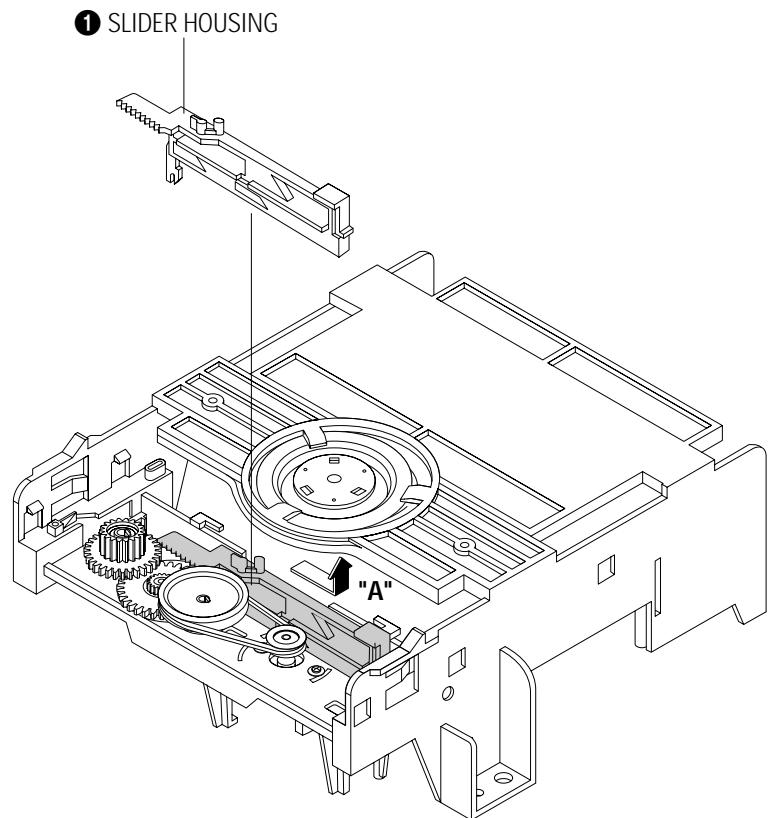


Fig. 4-10 Slider Housing Removal

4-4-4 Housing Ass'y Removal

- 1) Remove Belt ① and 1 Screw ②.
- 2) Remove 1 Screw ③ and lift up the Pulley Gear ④.
- 3) Push the Hook ⑤ in the direction arrow "A" and lift up Gear Tray ⑥, Gear Housing ⑦.
- 4) Push the 4 Hooks ⑧ bottom side in the direction arrow "B" and lift up the Motor Load Ass'y ⑨.
- 5) Remove Clamper Ass'y ⑩.

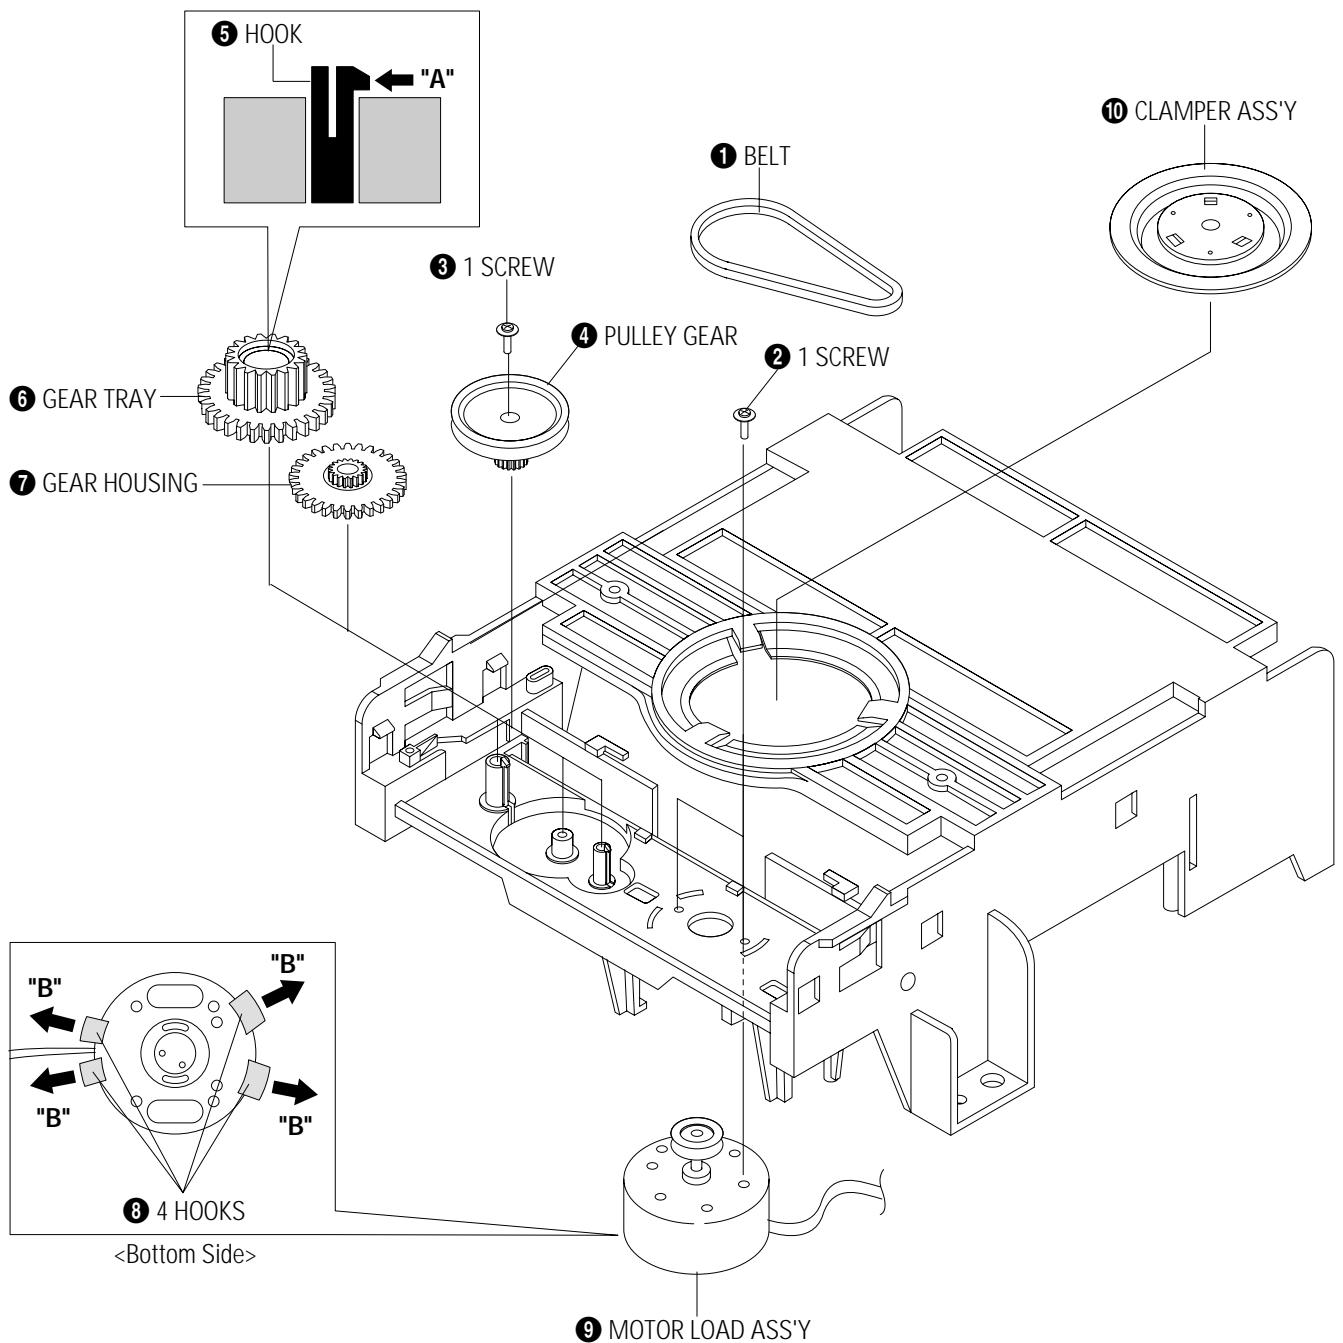


Fig. 4-11 Housing Ass'y Removal

4-4-5 Sub Chassis Removal

- 1) Remove the 4 Screws ①.
- 2) Lift up the Ass'y Brkt Deck ②.

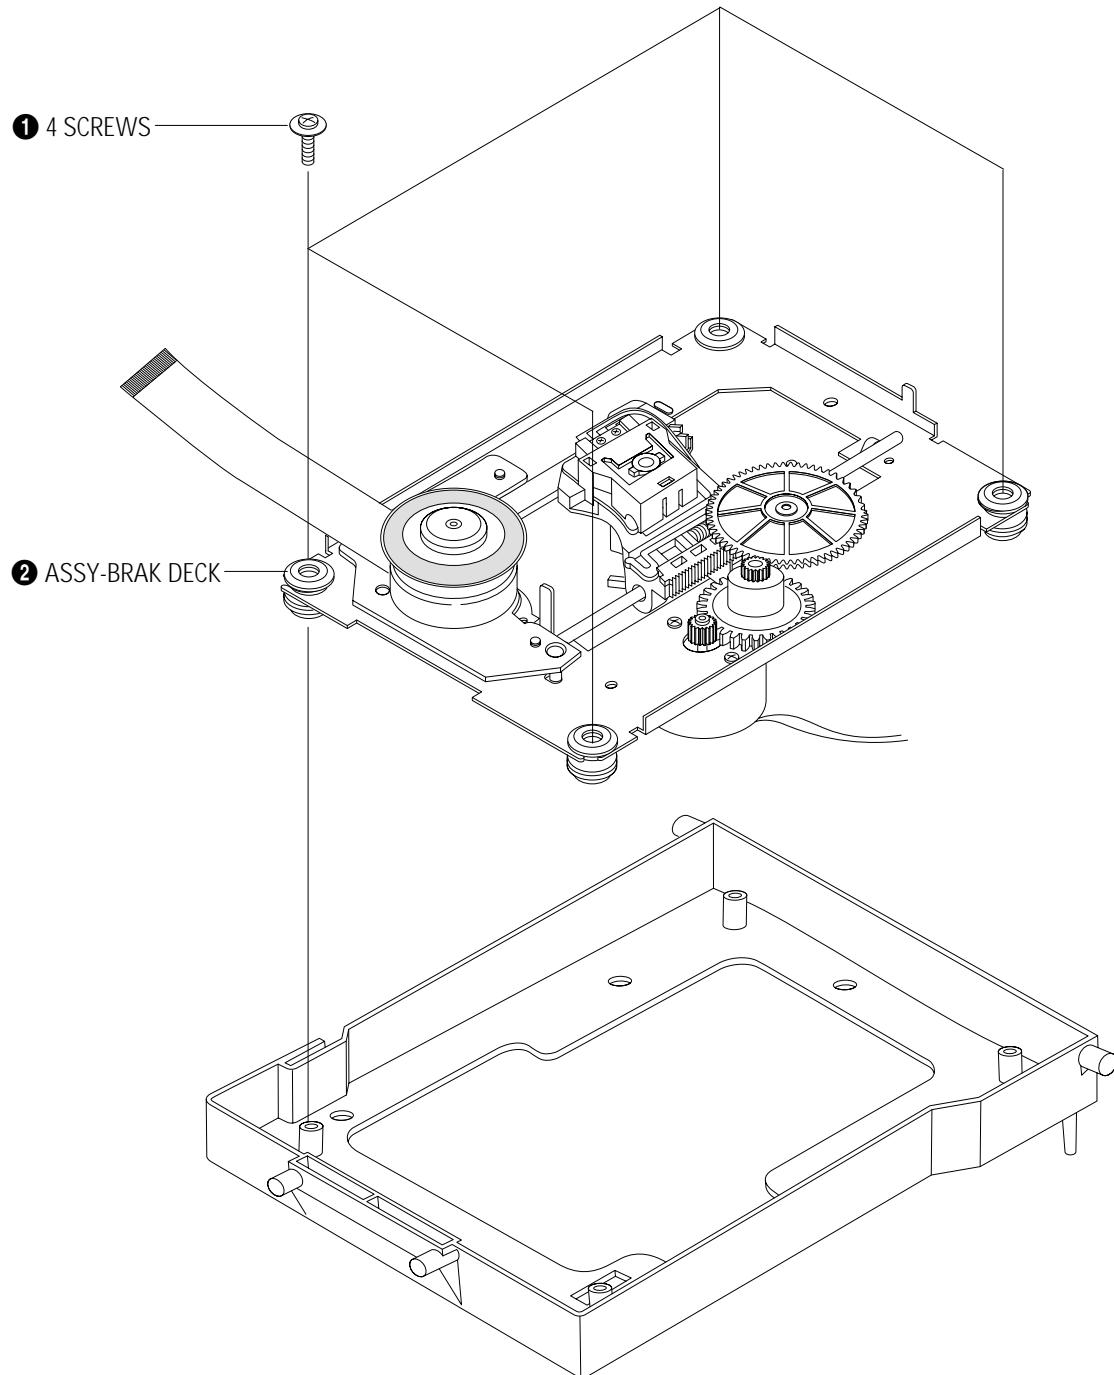


Fig. 4-12 Sub Chassis Removal

4-4-6 Ass'y Brkt Deck Removal

- 1) Remove Washer ①.
- 2) Remove Gear Feed B ② , Gear Feed A ③.
- 3) Remove 2 Screws ④.
- 4) Remove Shaft Pick-Up ⑤ and Pick-Up Assy ⑥.
- 5) Remove 1 Screw ⑦.
- 6) Remove 2 Screws ⑧.
- 7) Remove 3 Spring Spindle ⑨ and Motor Spindle Ass'y ⑩.

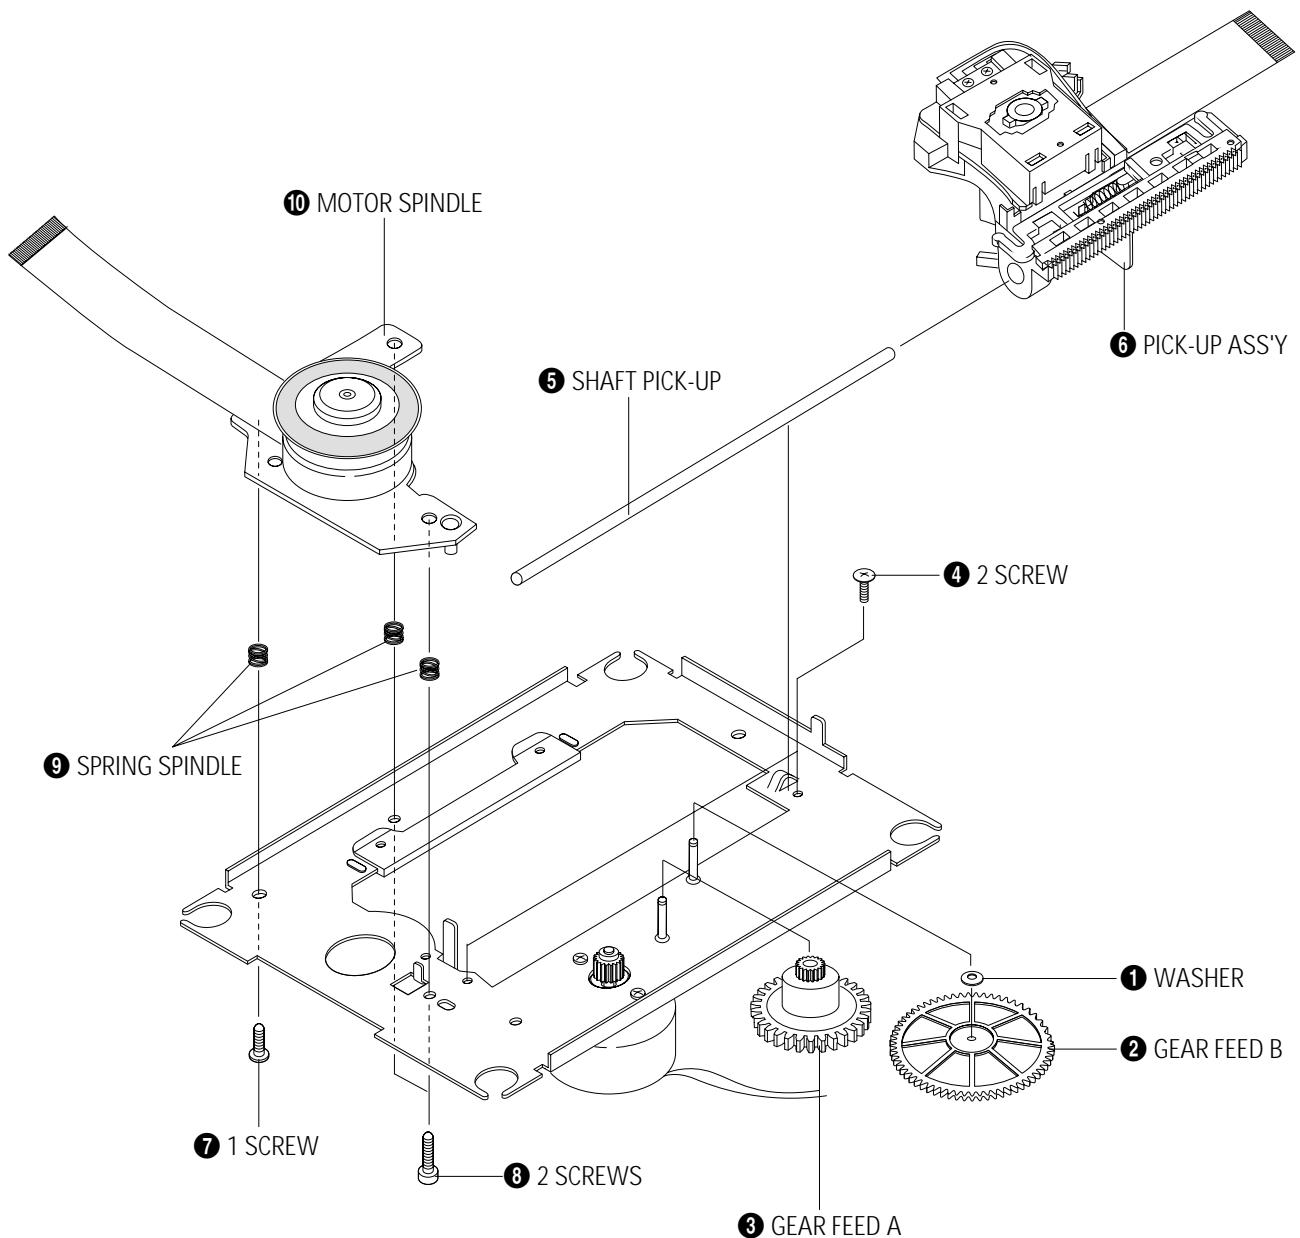


Fig. 4-13 Ass'y Brkt Deck Removal

MEMO

5. Circuit Descriptions

5-1 S.M.P.S.

5-1-1 Comparsion between Linear Power Supply and S.M.P.S.

5-1-1 (a) Linear

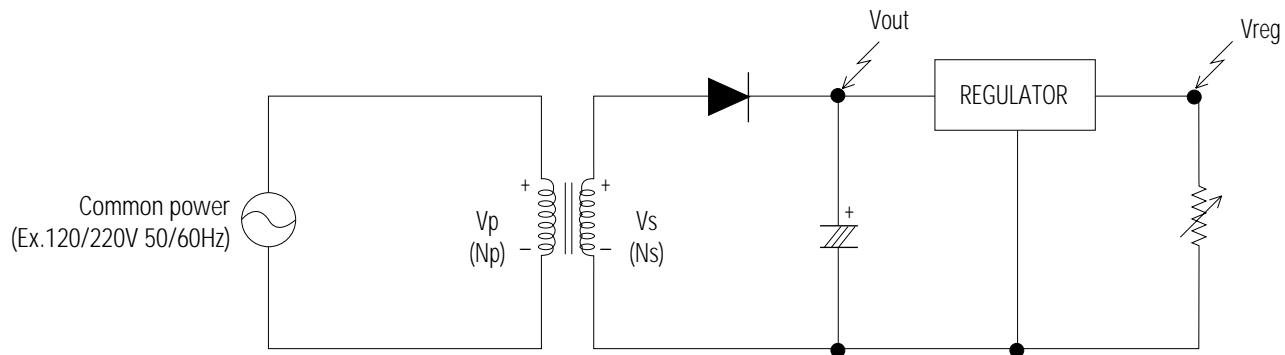


Fig. 5-1 Linear Power Supply

◆ Waveform/Description

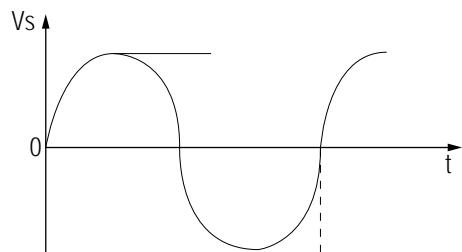


Fig. 5-2

Input : Common power to transformer (V_p).


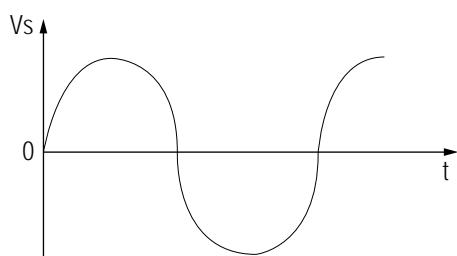


Fig. 5-3

The output V_s of transformer is determined by the ratio of 1st N_p and 2nd N_s .
$$V_s = (N_s/N_p) \times V_p$$

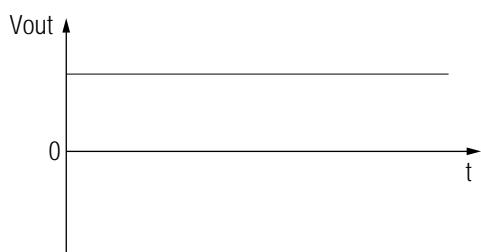

V_{out} is output (DC) by diode and condensor.

Fig. 5-4

- ◆ Advantages and disadvantages of linear power supply

1) Advantages : Little noise because the output waveform of transformer is sine wave.

2) Disadvantages :

- ① Additional margin is required because Vs is changed (depending on power source). (The regulator loss is caused by margin design).
- ② Greater core size and condenser capacity are needed, because the transformer works on a single power frequency.

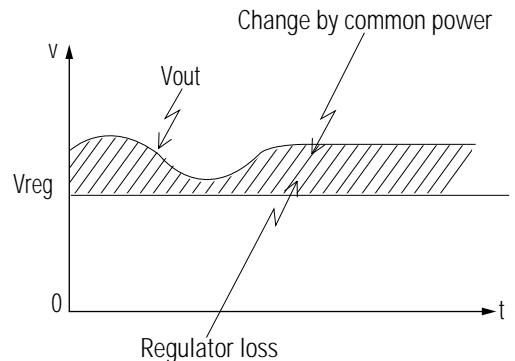


Fig. 5-5

5-1-1 (b) S.M.P.S. (Pulse width modulation method)

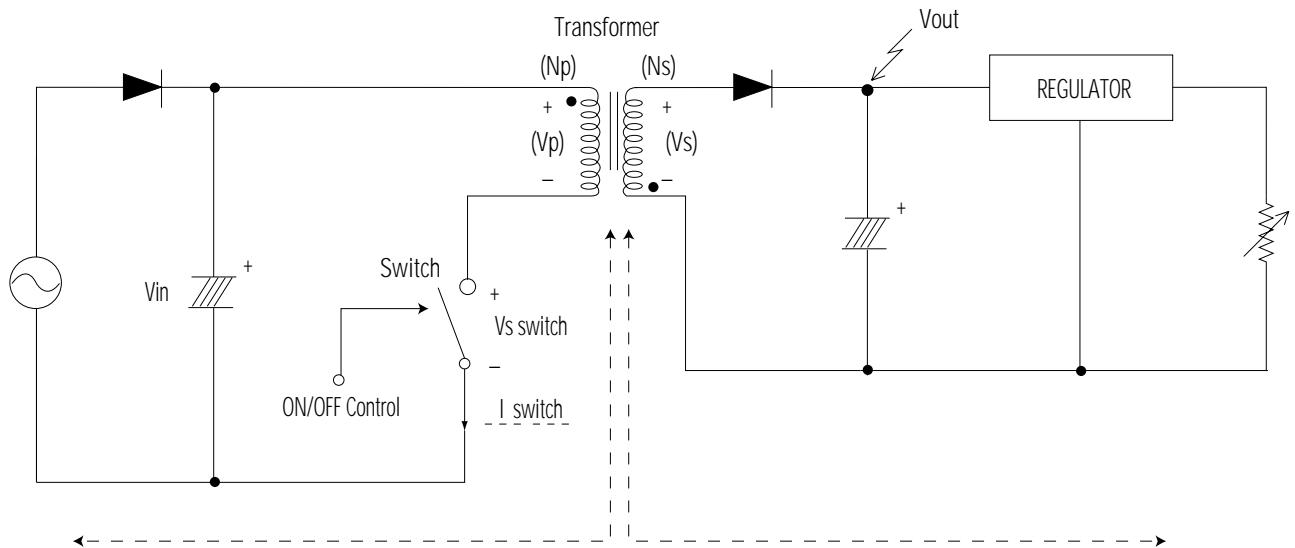


Fig. 5-6

- ◆ Terms

- 1) 1st : Common power input to 1st winding.
- 2) 2nd : Circuit followings output winding of transformer.
- 3) F (Frequency) : Switching frequency (T : Switching cycle)
- 4) Duty : $(T_{on}/T) \times 100$

5-1-2 Circuit description (FLY-Back Control)

5-1-2 (a) AC Power Rectification/Smoothing Terminal

- 1) PDS01, PDS02, PDS03, PDS04 : Convert AC power to DC(Wave rectification).
- 2) PE3 : Smooth the voltage converted to DC.
- 3) PCR01, PCR02, PCD01, PCD02, PCD03, PLS01, PBS01 : Noise removal at power input/output.
- 4) PVA1 : SMPS protection at power surge input (PVA1 pattern open is to remove noise).

5-1-2 (b) SNUBBER Circuit : PER11, PDS11, PCR11, PCD12, PRS11, PRS12

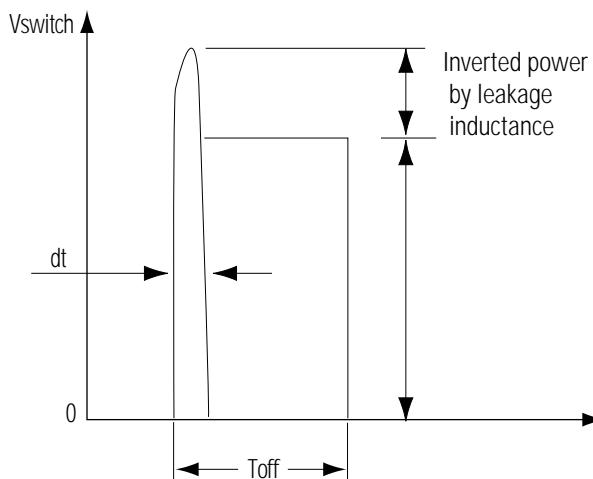


Fig. 5-7

5-1-2 (c) Driving circuit

When V_{in} supplied, driving current I_g occurs through the PRR11. By this IC (=HfexIg) occurs through the PQR11 and the V_b is induced to base winding coil NB of PQR11. By induced V_b , I_b start flow and the PQR11 is saturated (S/W ON). I_b is constant and I_c increases in proportion to time. After constant time passed I_b become to shotage and PQR11 is cut OFF (S/W OFF).

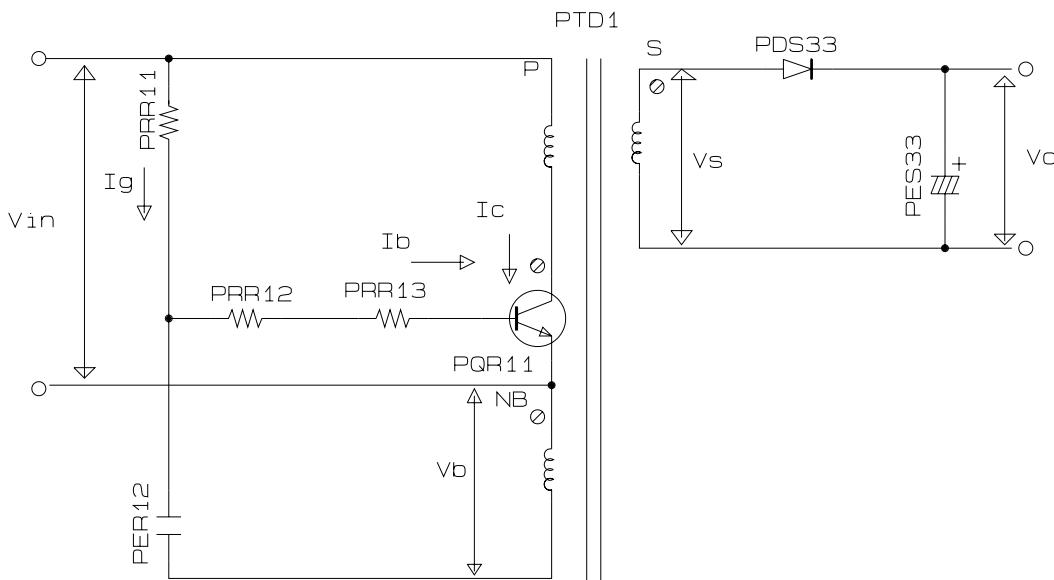


Fig. 5-8 Driving Circuit

5-1-2 (d) Feedback Control Circuit

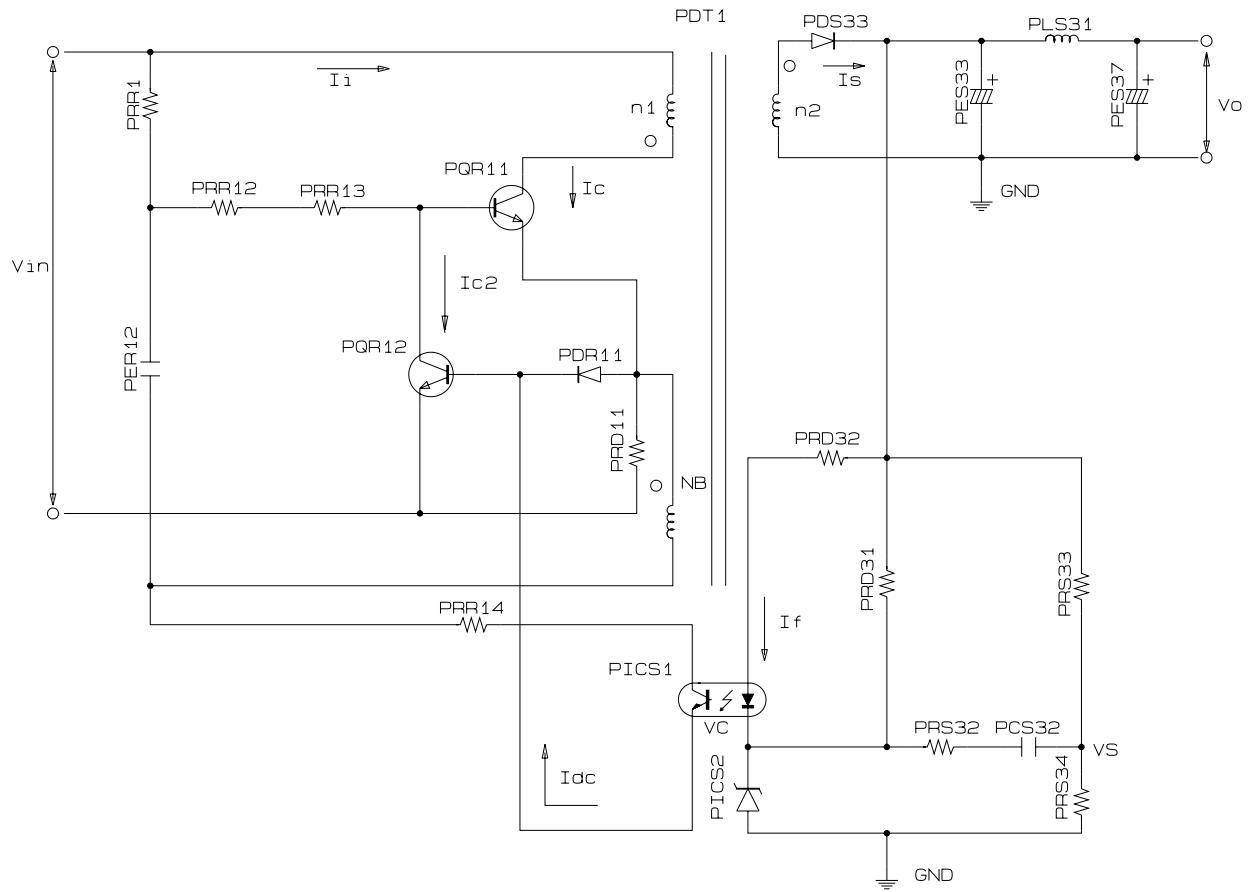


Fig. 5-9

◆ Operation descriptions

- 1) Internal OP-Amp '+' base potential of PICS2 is 2.5V and external '-' input potential is connected with PRS33 and PRS34 to maintain V_{out} of 5.8V.
- 2) If load of 5.8V terminal decreases (or AC inout voltage increases) and V_{out} increases over 5.8V,
Then : PICS2 Vs potential up over 2.5V --> PICS2 Vc down --> PICS1 A-K potential down --> PICS1 C-E current up --> PQR12 base current up --> PQR11 base current down --> V_{out} down --> Maintain 5.8V
 - PRD31, PRD32 : Reduce 5.8V overshoot.
 - PRS32, PCS32 : Prevent PICS2 oscillation (for phase correction).

5-1-3 Internal Block Diagram

◆ Internal Block Diagram

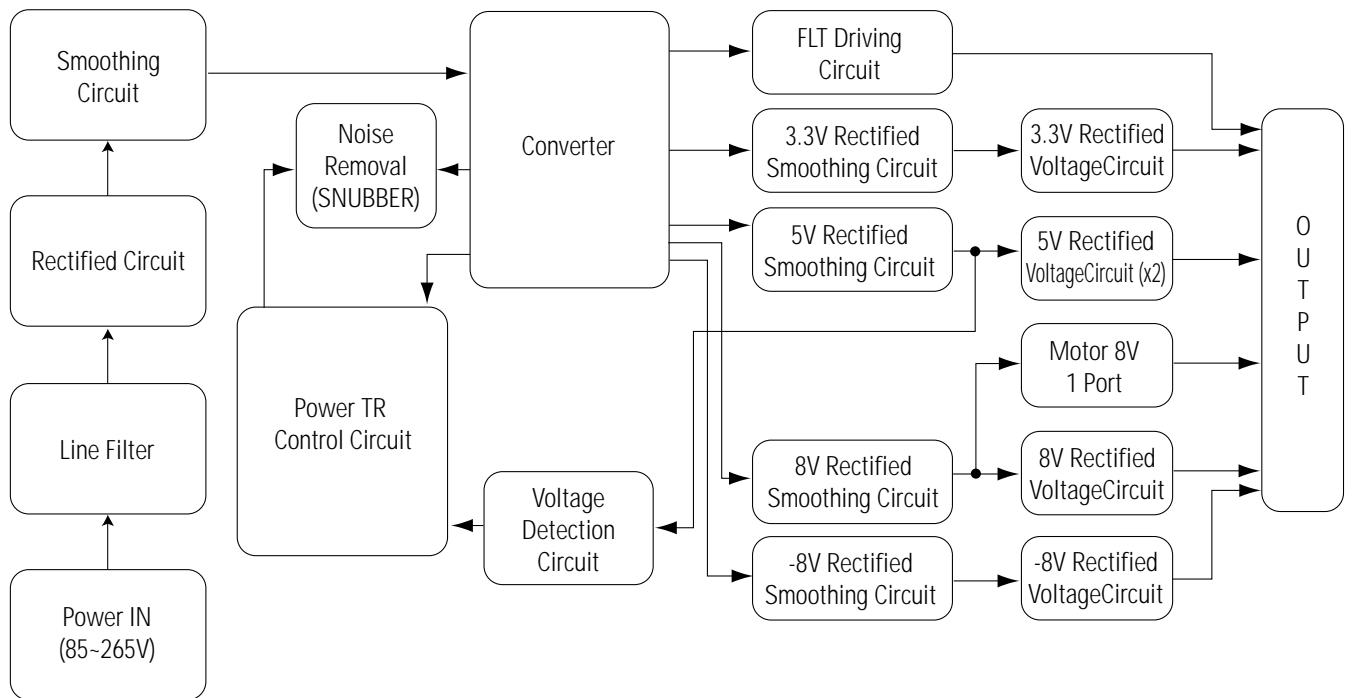


Fig. 5-10

5-2 RF

5-2-1 RIC1 (KS1461)

KS1461 is combined with KS1452 and KS1453 as bipolar IC developed for DVD SERVO system. Main features include DVD waveform equalizing, CD waveform equalizing, focus error signal generation, 3-beam tracking error signal generation, DPD 1-beam tracking error, defect, envelope, MIRR output, etc. after receiving the pick-up output converted into I/V.

5-2-1 (a) Basic Potentiometer

KS1461 uses a single power method and each circuit is based on V_D of 2.5V. V (Pin 12, 20, 24, 67) terminal is needed for IC, which uses the peripheral V_D.

5-2-1(b) RF signal

Fig. 5-11 shows the flow of signal generated by the pick-up.

A, B, C, D signals detected from pick-up are converted in to RF signal(A+B+C+D) via RF summing AMP.

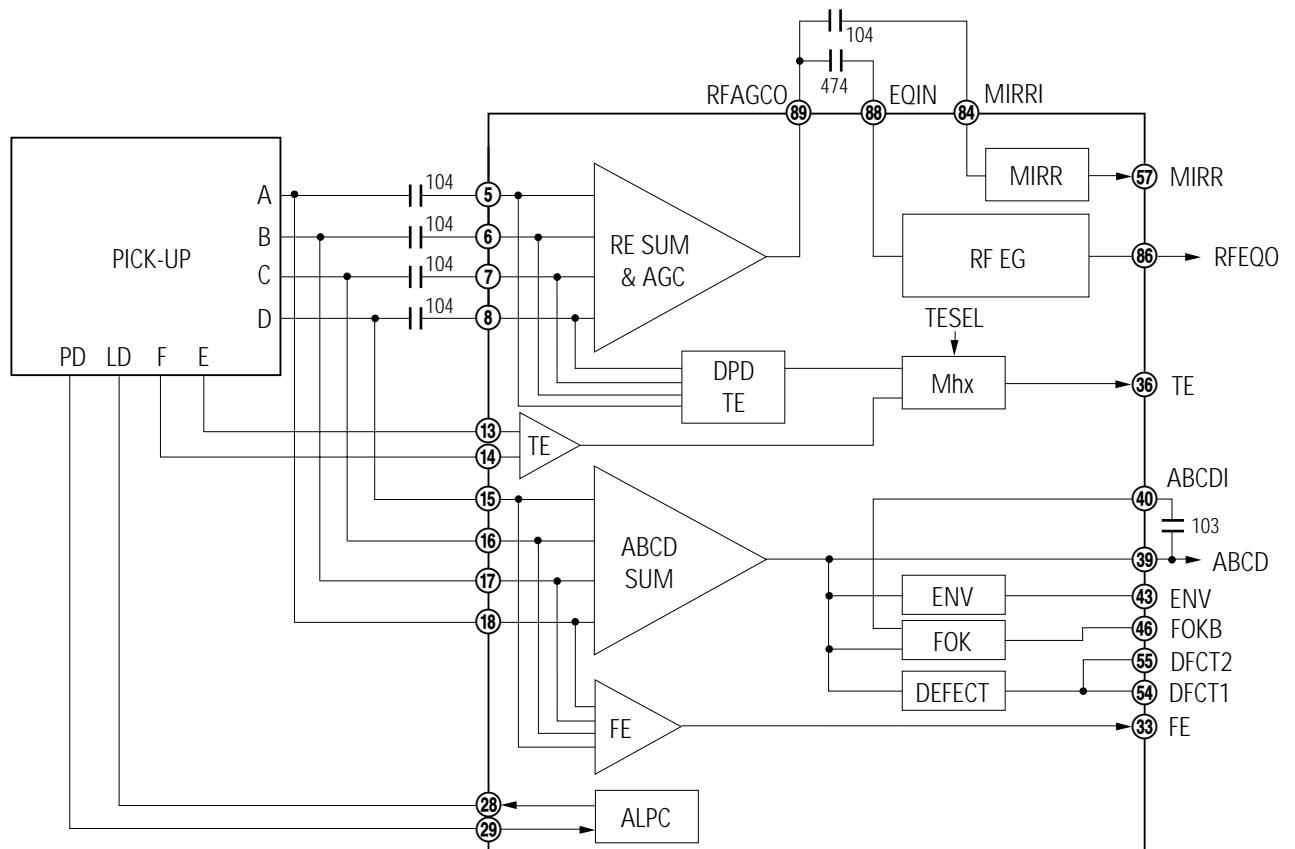


Fig. 5-11

Fig. 5-12 shows the waveform-equalizing block diagram for the RF signal.

It outputs to EQout (Pin 86) terminal by initially changing switching AMP gain of DVD and CD, and then adjusting the level in RF SUM & AGC. It controls RF SUM & AGC gain by means of Pin 89-95 and interfaces with PWM signal, (output from PWM terminal of KS1453, via low-pass filter to adjust boost gain and peak frequency).

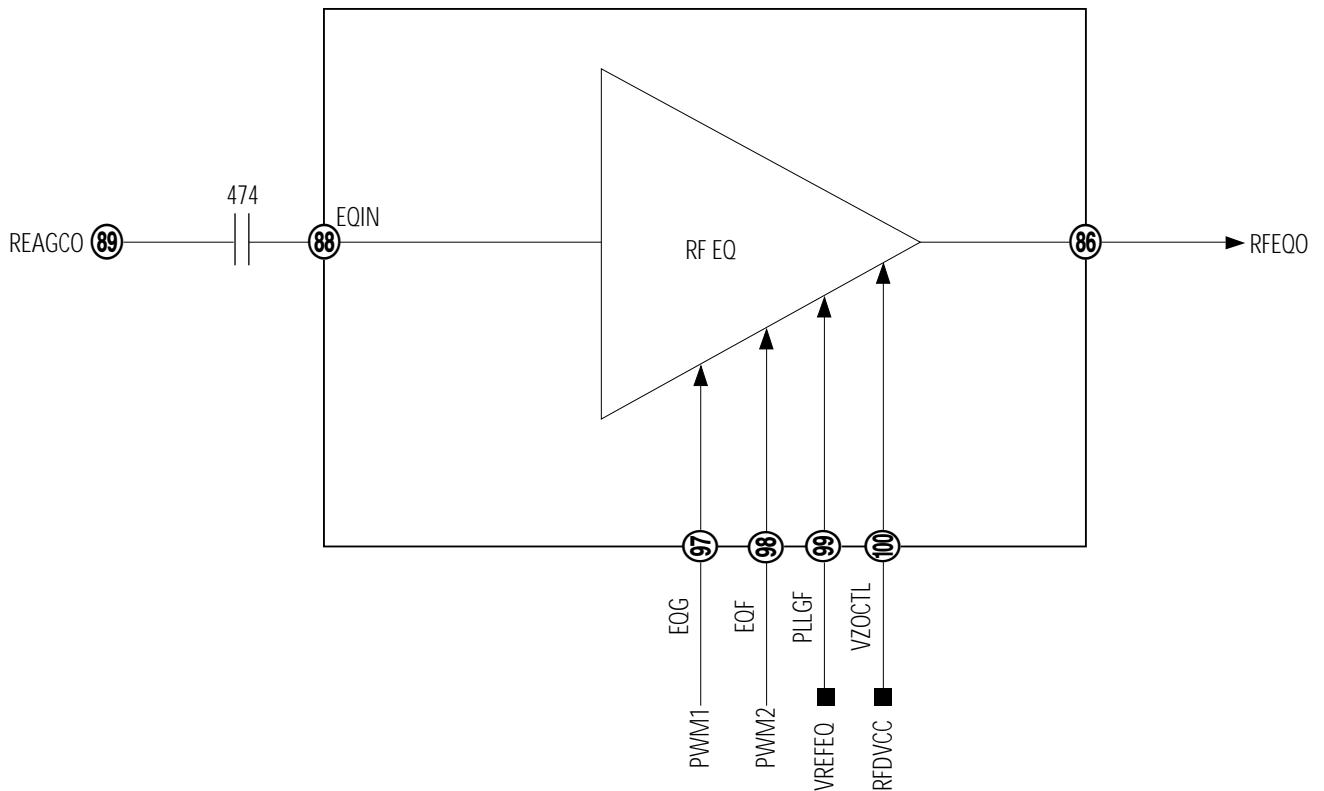


Fig. 5-12

The control parameters of DVD EQ and CD EQ are as follows.

1) DVD CD EQ control parameter

- ① **EQG** (Pin 97) : Changes the gain of peak frequency with EQ frequency characteristic. Convert PWM signal, output from KS1453, into DC via low-pass filter.
- ② **EQF** (Pin 98) : Changes the peak frequency with EQ frequency characteristic. Convert PWM signal, output from KS1453, into DVD via low-pass filter.

5-3 System Control

5-3-1 Outline

The main micom peripheral circuit is composed of 16bit Micom (MIC1 ; TMP95C265), 8M EPROM (MIC2 ; M27C801) for Microcode and data save, 256 byte EE-PROM (MIC4 ; KS24C020) for permanent storage of data needed at power off.

The Micom (MIC1 ; TMP95C265) mounted in main board analizes the key commands of front panel or instructions of remote control through communication with Micom (FIC1 ; LC86P6232) of front and controls the devices on board to execute the corresponding commands after initializing the devices connected with micom on board at power on.

5-3-2 Block Diagram

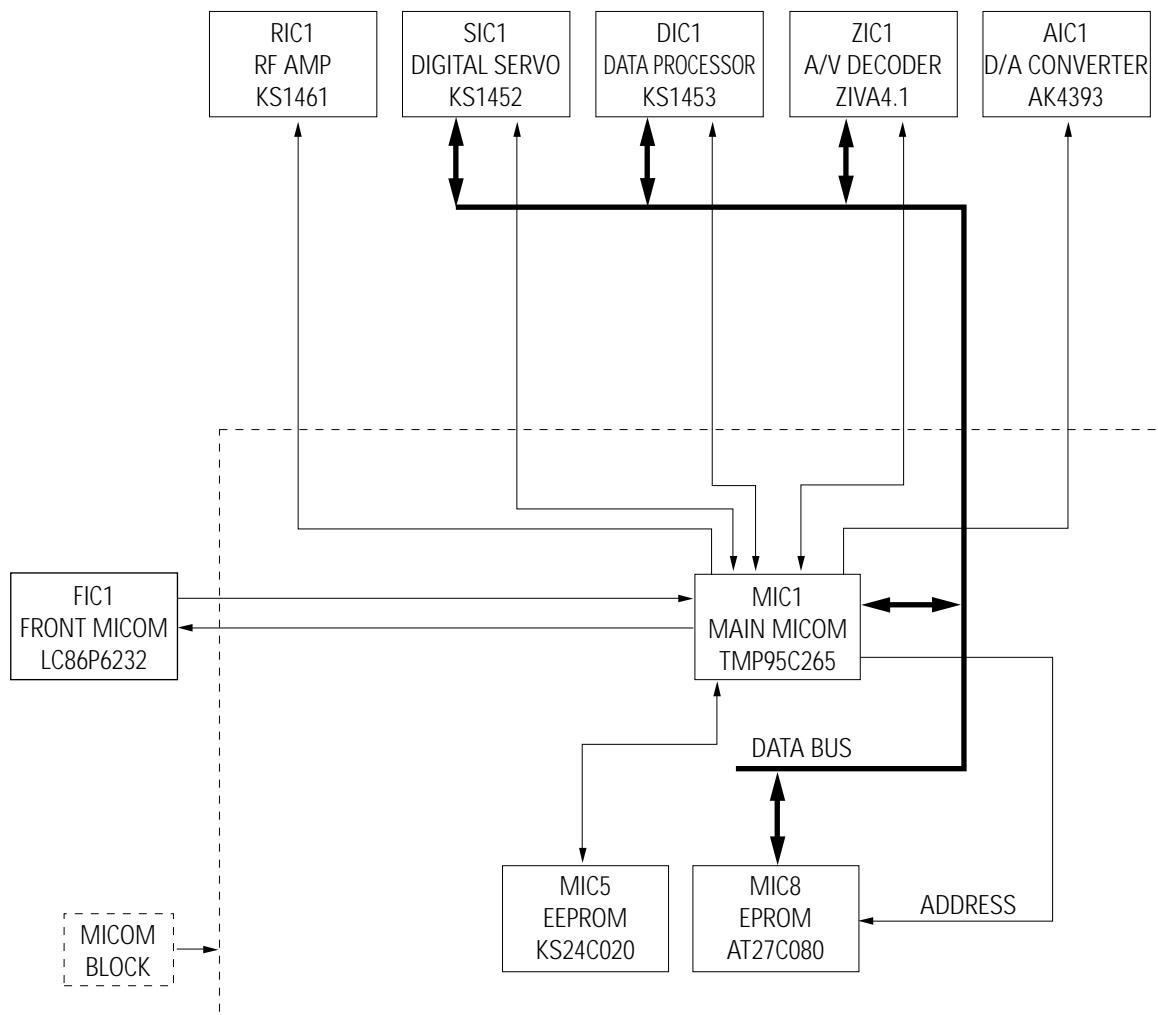


Fig. 5-13

5-3-3 Waveform Description

When micom accesses each device sharing bus, it falls the chip select signal of corresponding chip to (/CS1:MIC3-22, /CS2:MIC2-22, /DSPCS:DIC1-2, /DVD1CS:ZIC1-208, CSB:SIC1-10) 0 (Low) before trial.

So to speak, the bus is used by time-division as shown in Fig 5-14, 5-15, 5-16.

Two and more devices can't be accessed simultaneously.

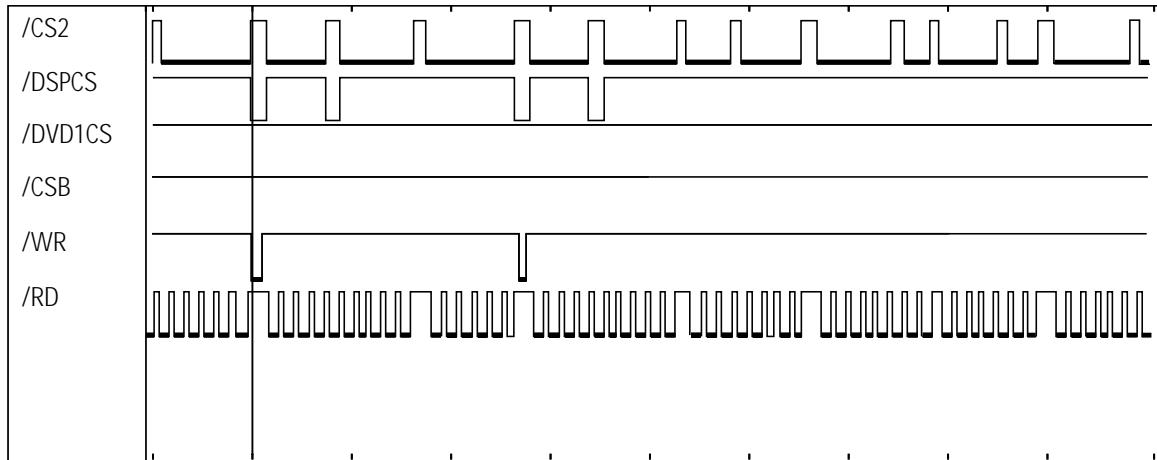


Fig. 5-14

- CH1 : CS2 (MIC2-22, EPROM CHIP SELECT)
- CH2 : DSPCS (DIC1-2, DATA PROCESSOR CHIP SELECT)
- CH3 : DVD1CS (ZIC1-208, A/V DECODER CHIP SELECT)
- CH4 : SRVCS (SIC1-10, DIGITAL SERVO CHIP SELECT)
- CH5 : WR (MIC1-89, MICOM OUTPUT WRITE SIGNAL)
- CH6 : RD (MIC1-88, MICOM OUTPUT READ SIGNAL)

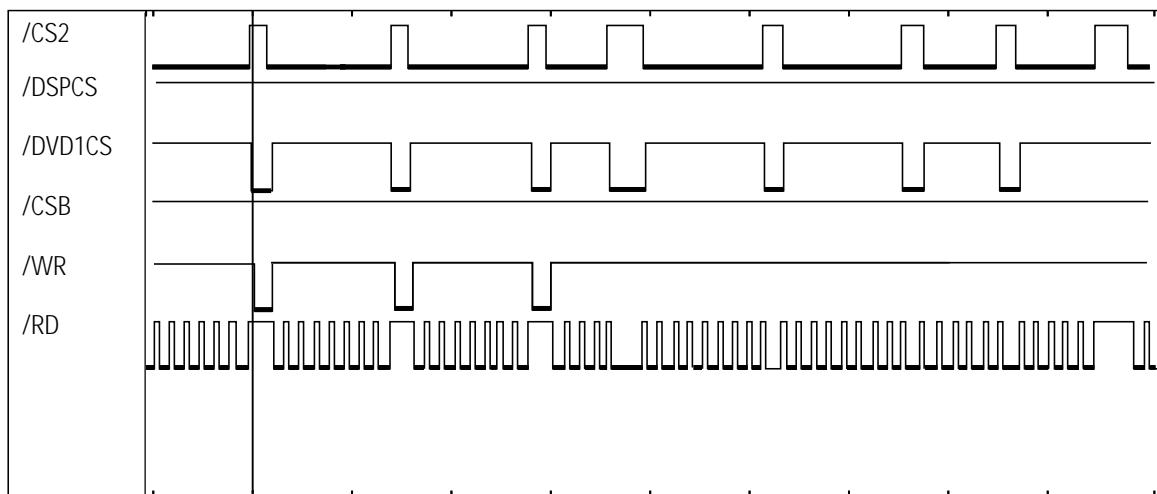


Fig. 5-15 DSP Access

- CH1 : CS2 (MIC2-22, EPROM CHIP SELECT)
- CH2 : DSPCS (DIC1-2, DATA PROCESSOR CHIP SELECT)
- CH3 : DVD1CS (ZIC1-208, A/V DECODER CHIP SELECT)
- CH4 : SRVCS (SIC1-10, DIGITAL SERVO CHIP SELECT)
- CH5 : WR (MIC1-89, MICOM OUTPUT WRITE SIGNAL)
- CH6 : RD (MIC1-88, MICOM OUTPUT READ SIGNAL)

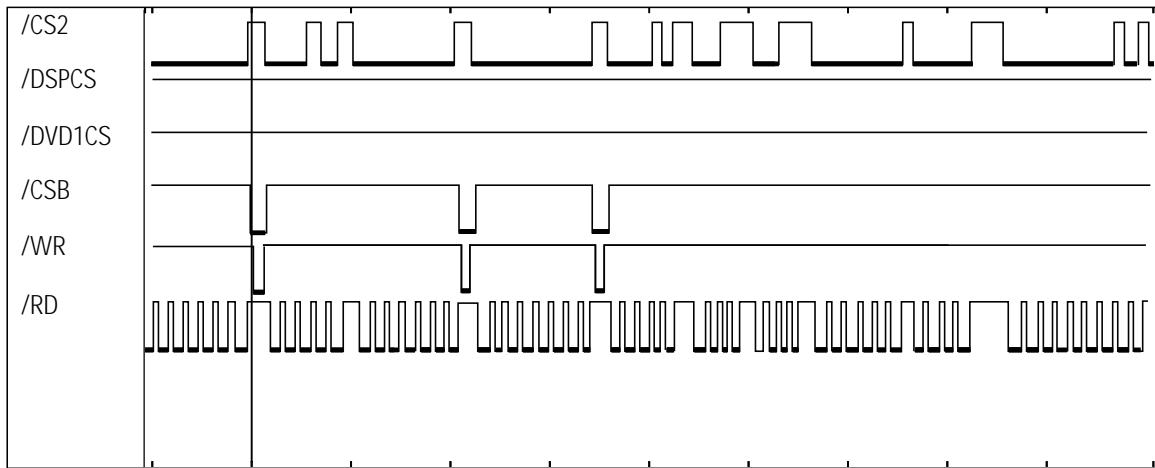


Fig. 5-16 Servo Access

- CH1 : CS2 (MIC2-22, EPROM CHIP SELECT)
- CH2 : DSPCS (DIC1-2, DATA PROCESSOR CHIP SELECT)
- CH3 : DVD1CS (ZIC1-208, A/V DECODER CHIP SELECT)
- CH4 : SRVCS (SIC1-10, DIGITAL SERVO CHIP SELECT)
- CH5 : WR (MIC1-89, MICOM OUTPUT WRITE SIGNAL)
- CH6 : RD (MIC1-88, MICOM OUTPUT READ SIGNAL)

5-4 Servo

5-4-1 Outline

SERVO system of DVD is divided into Focusing SERVO, Tracking SERVO, SLED Linked SERVO and CLV SERVO (DISC Motor Control SERVO).

1) Focusing SERVO

Focuses the optical spot output from object lens onto the disc surface. Maintains a uniform distance between object lens of Pick-up and disc (for surface vibration of disc).

2) Tracking SERVO

Make the object lens follow the disc track in use of tracking error signal (created from Pick-up).

3) SLED Linked SERVO

When the tracking actuator inclines outwardly as the object lens follows the track during play, the SLED motor moves slightly (and counteracts the incline).

4) CLV SERVO (DISC Motor Control SERVO)

Controls the disc motor to maintain a constant linear velocity (necessary for RF signal).

5-4-2 Block Diagram

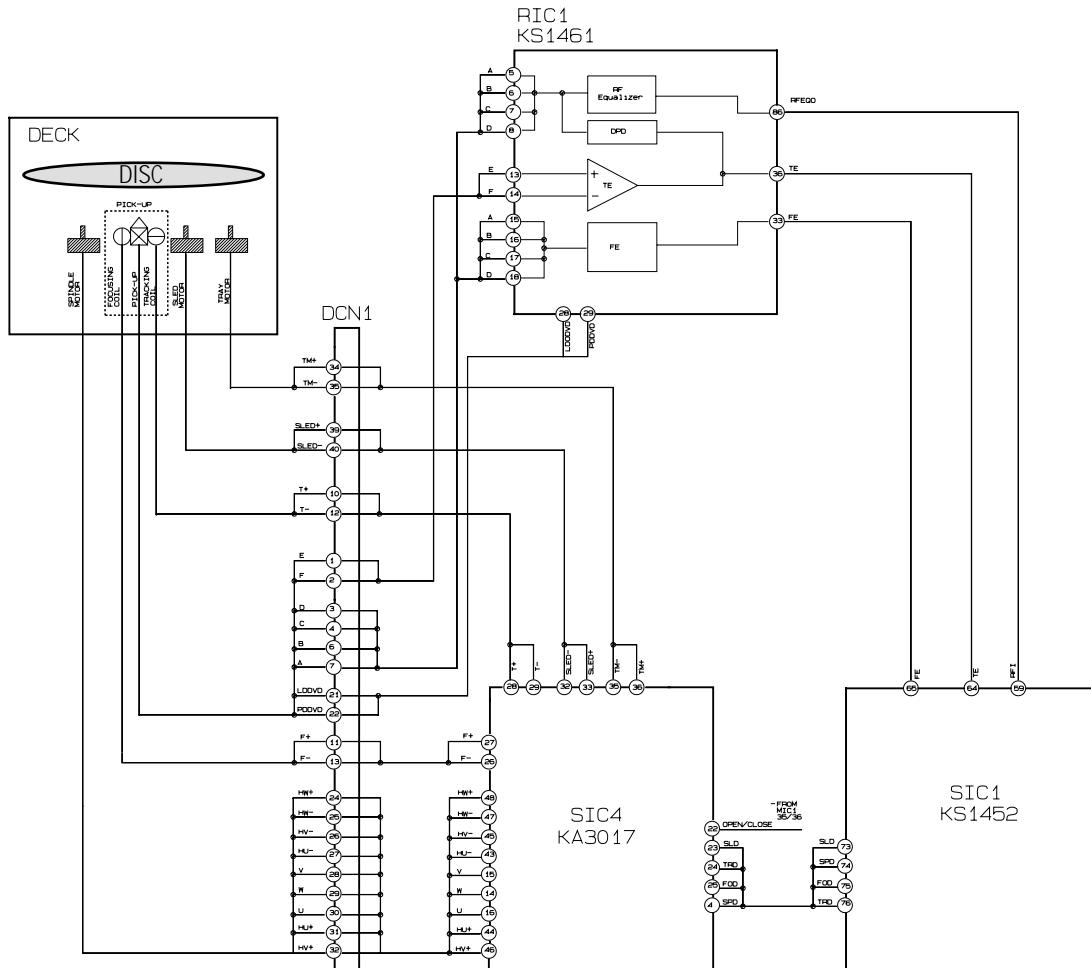


Fig. 5-17

5-4-3 Operation

1) FOCUSING SERVO

(1) FOCUS INPUT

The focus loop is changed from open loop to closed loop, and the triangular waveform moves the object lens up and down (at pin 75 of SIC1 during Focus SERVO ON.) At that time, S curve is input to pin 65 of SIC1.

ABAD (pin 39 of RIC1) signal, summing signal of PD A, B, C, D, is generated, and zero cross(2.5V) point occurs when S curve is focused and ABAD signal exceeds a preset,constant value. The focus loop is changed to closed loop, and the object lens follows the disc movement, maintaining a constant distance from the disc. (these operations are same in CD and DVD).

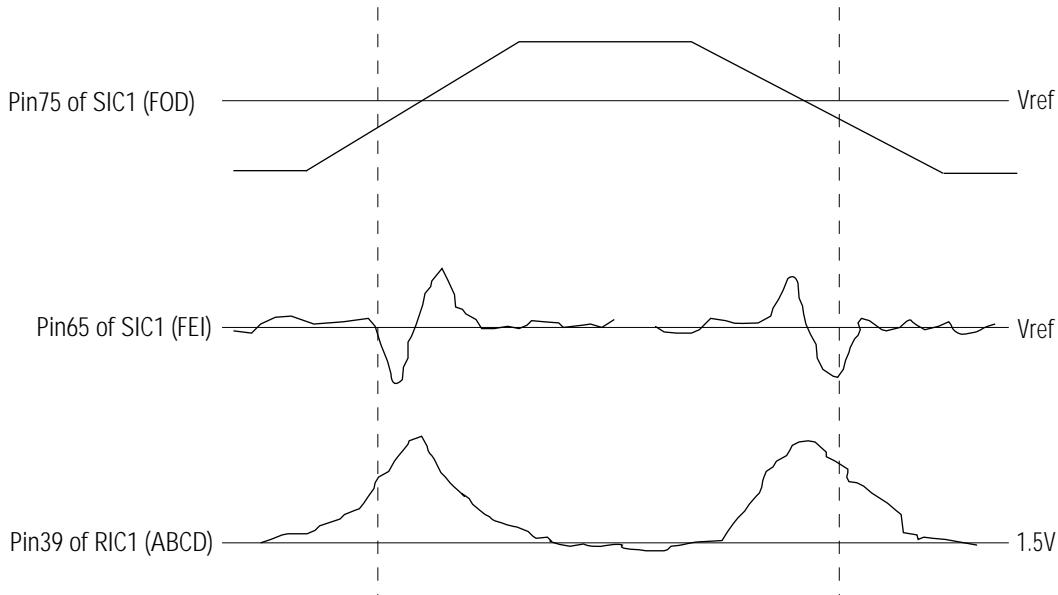


Fig. 5-18

(2) PLAY

When focus loop closes the loop during focus servo on, both pin 65 and pin 75 of SIC1 are controlled by VREF voltage (approx. 2.5V), and pin 26, 27 of SIC4 are approximately 4.5V.

2) TRACKING SERVO

(1) NORMAL PLAY MODE

① For DVD

Composite : The signal output from PD A, B, C, D of Pick-up, the tracking error signal (pin36 of RIC1) uses the phase difference of A+C and B+D in RIC1, and inputs to terminal 64 of SIC1. Then, it is output to SIC1 pin 76 via digital equalizer, and applied to the tracking actuator through SIC4.

Pins 76 of SIC1 is controlled by VREF(approx. 2.5V) during normal play.

Meanwhile, DVD repeats the track jump from 1 to 4 in inner direction at normal play (because data- read speed from disc is faster than data output speed on screen).

② For CD, VCD

Receive the signal output through E, F of Pick-up, from RIC1. The tracking error signal is similar to DVD.

(2) SEARCH Mode :

Search mode : Fine seek,(Moving the tracking actuator slightly little below 255 track) and coarse search, moving much in use of sled motor. The coarse search will be described in sled linked servo and now, the fine seek is explained shortly.

If the object lens is located near target, cut off the tracking loop and give the control signal as many as desired count to move the tracking actuator via SIC1 pin 76 terminal(TRD).

3) SLED LINKED SERVO

• Normal play mode

Move SLED motor slightly by means of PWM signal in SIC1 pin 73, as the tracking actuator moves along with track during play. Control to move the entire Pick-up as the tracking actuator moves.

• Coarse search mode

In case of long-distance search (such as chapter search), SIC1 uses MIRR and TZC signal of SIC1-38, 52. Then, read ID and compute the existing track count after input of next track. If the existing track count is within fine seek range, tracking begins using fine seek.

4) CLV SERVO(DISC MOTOR CONTROL SERVO)

Input RF signal (from Pick-up) to SIC1 pin59. Detect SYNC signal from RF in SIC1, and output PWM signal to SIC1 pin 55 for constant linear velocity.

5-5 DVD Data Processor

5-5-1 Outline

DIC1(KS1453) performs Sync detection, EFM demodulation and error correction and Spindle motor control (CLV control) after inputting sliced EFM signal of RF signal at disc playback and EFM read clock (PLCK) signal generated from PLL. Outputs data which converted to the last audio and video from A/V decoder (ZIC1). KS1453 uses external memory(4M DRAM) as buffer as well as for error correction and carries out Variable Bit Rate transfer function. VBR function uses the external buffer as buffer to absorb the difference of transfer rate occurring because the transfer rate of disc playback is faster than data transfer rate demanded by A/V decoder(Video/Audio Signal Process Chip).

In case of general disc refresh, the memory is almost filled up periodically. It is because Write rate to memory after disc playback and signal process is faster than Read of A/V decoder. When the memory is filled, this status is reported by interrupt to main micom, which controls the servo to kick back the pick-up to the previous track after memorizing the last data read from disc until now. It takes some times to jump to the previous track and return to the original(jump location) again. The memory will have an empty space because A/V decoder reads out data of memory.

When the memory has an empty space, where data can be processed and written and the pick-up correctly gets to the original location(before kick back location) again, it reads data again avoids the interrupt of data read previously. The basic operation repeats to perform as described above.

5-5-2 Block Diagram

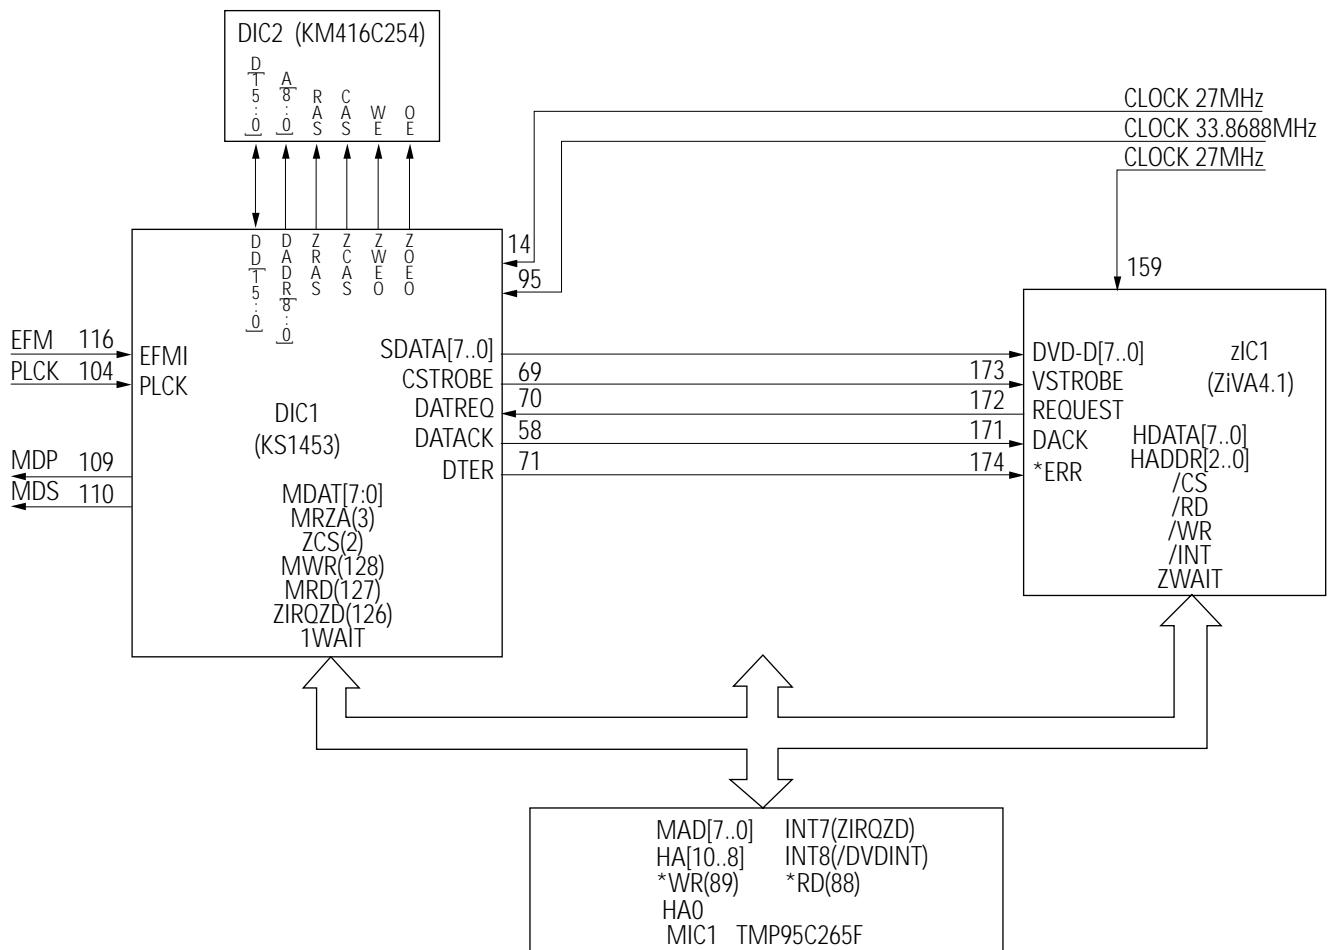


Fig. 5-19

5-5-3 Waveform Description

It measures the timing that data processed in DIC1 at DVD playback.

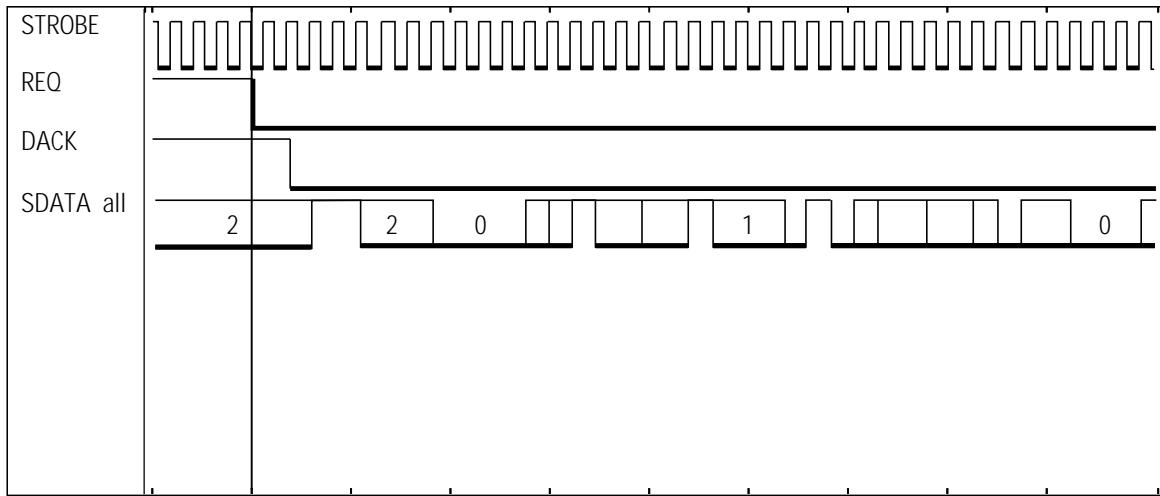


Fig. 5-20

- CH1 : STROBE (DIC1-69, CLOCK)
- CH2 : REQ (DIC1-70, DATA REQUEST)
- CH3 : DACK (DIC1-58, DATA ACKNOWLEDGE)
- CH4 : SDATA (DIC1-60~67, DATA)

5-6 Video

5-6-1 Outline

ZIC1(A/V decoder with video encoder) diverges from the 27MHz crystal, then generates VHSYNC and HSYNC. ZIC1(A/V decoder with video encoder) does RGB encoding, copy guard processing and D/A conversion of 8bit video data internally inputted from video decoder block by MIC1(Micom).

Video signal converted into analog signal is outputted via amplifier of analog part.

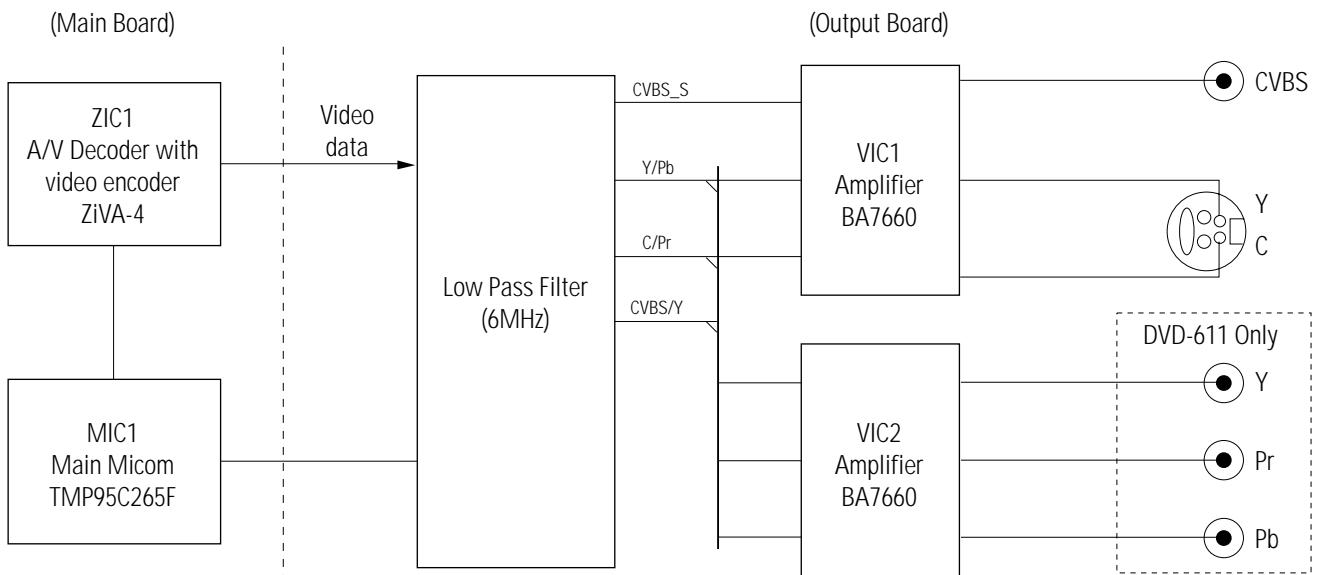


Fig. 5-21 Video Output Block Diagram

5-6-2 NTSC Digital Encoder (ZIVA-4.1 ; Built in video encode)

ZIC1 inputted from pin159 with 27MHz generates HSYNC and VSYNC which are based on video signal.

ZIC1 is synchronous signals with decoded video signal and control the output timing of 8bit video signal of ITU-R601 format.

The inputted 8bit data which decoded from video decoder block is demuxed with each 8bit of Y, R-Y, B-Y. The separate signal is encoded to NTSC by control of MIC1.

The above signals, which are CVBS(Composite Video Burst Synchronized)/G(GREEN)/Y[PIN139], Y(S_VIDEO)/B(BLUE)/Pb[PIN145] and C(S_VIDEO)/R(RED)/Pr[PIN151], are selectively outputted CVBS +S_VIDEO, Y+Pr+Pb by the rear switch.

In course of encoding, 8bit data can extend to 10bit or more. To convert the extended data to quantization noise as possible, ZIC1 adopts 10bit D/A converter. ZIC1 performs video en-coding as well as copy protection.

5-6-3 Amplifier (VIC1, VIC2 : BA7660)

VIC1 and VIC2 are 6dB amplifier. Based on CVBS signal, the final output level must be 2Vpp without 75ohm terminal resistance. Because the level of video encoder output is only 1.1Vpp, the level is adjusted with the special amplifier. When mute of pin 1 is high active, if the pin is floating and connecte to power, the output isignal is never outputted. CVBS,Y,C,Y,Cr,Cb outputted from video encoder are inputted to VIC1(Pin 7,Pin2,Pin4),and VIC2(Pin7,Pin4,Pin2) respectively and outputted from VIC1(Pin15,Pin13,Pin10) and VIC2(Pin15,Pin13,Pin10). Pin9, Pin12, Pin14 of VIC1, VIC2 are feedback pin to SAG compensation(DC characteristic compensation of siganl).

The signal to which gain is adjusted by amplifier is outputted from jack via 75ohm Resistance(VR10~VR13, VR22~24).

5-7 Audio

5-7-1 Outline

The four data (Data 0~3) outputted from A/V decoder (ZIC1 ; ZiVA4.1) are supplied to DATA 0 for 2-channel mixed audio output and to DATA 1~3 for Analog audio output (5.1-channel).

The audio data (0~3) transmitted from A/V decoder (ZIC1 ; ZiVA4.1) are converted into analog signal via audio D/A converter and outputted via post filter and amplifier.

CD and VCD are outputted with only 2 channels audio data and transmit them to Data 0 and Data 1.

Front L/R channel is outputted in mixed audio output (L/R output) and analog audio output and surround L/R, center and subwoofer aren't outputted.

If DVD of 2 channels source disc is used, it is outputted by the same way with CD and VCD.

If 5.1-channel source disc, front L/R channel is outputted in Data 1, Surround L/R in Data 2 and Center/Subwoofer in Data 3. At that time, 5.1 channel can be downmixed in 2 channel in Data 0.

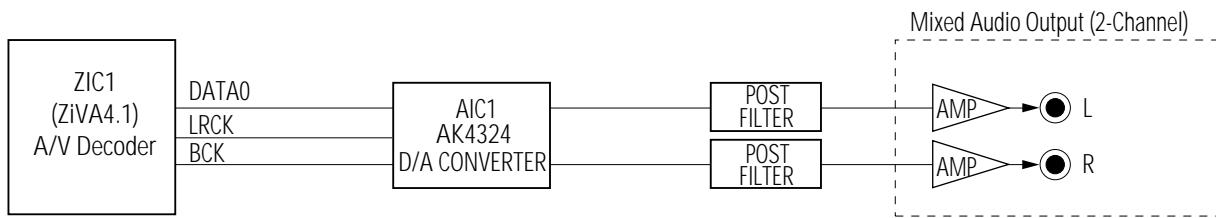


Fig. 5-22 Audio Output Block Diagram

5-7-2 DVD Audio Output

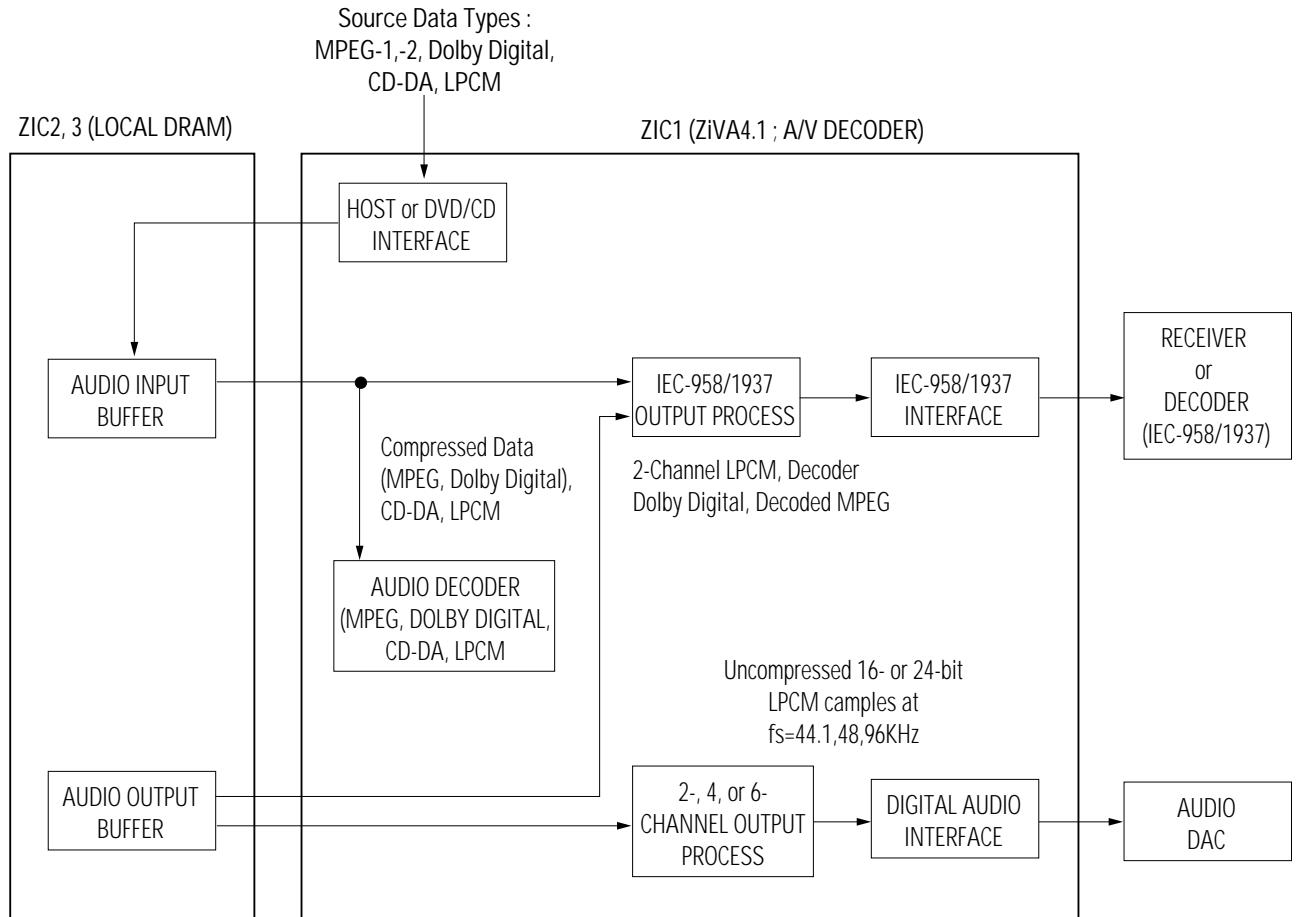


Fig. 5-23 Audio Decoder and Output Interface Datapath

1) Compressed Data

The audio data inputted to ZIC1 (ZiVA4.1) A/V decoder is divided into compressed data and uncompressed data. It is compressed data that is compressed with multi-channel audio data such as Dolby digital, MPEG, DTS, etc. The compressed data inputted to ZIC1 (ZiVA4.1) is converted into the uncompressed data of 2, 4, and 6 channels through ZiVA4.1 built-in audio decoder and is outputted to Data 0, 1, 2, and 3 through digital audio interface. The compressed data is transmitted to external AC-3 amplifier or MPEG/DTS amplifier as IEC-958/1937 transmission data format compressed by ZiVA4.1 built-in IEC-958 output process.


2) Uncompressed Data



The uncompressed data is that data isn't compressed, so it is called CD-DA, LPCM data.


The 2 channels data is converted through audio decoder 2-channel data and Data 0 and Data 1 are outputted in digital audio interface. Via IEC-958 output process, they are transmitted to digital amplifier or AC-3/MPEG/DTS amplifier built in the external digital input source with IEC-958/1937 transmission format.


MEMO


6. Troubleshooting

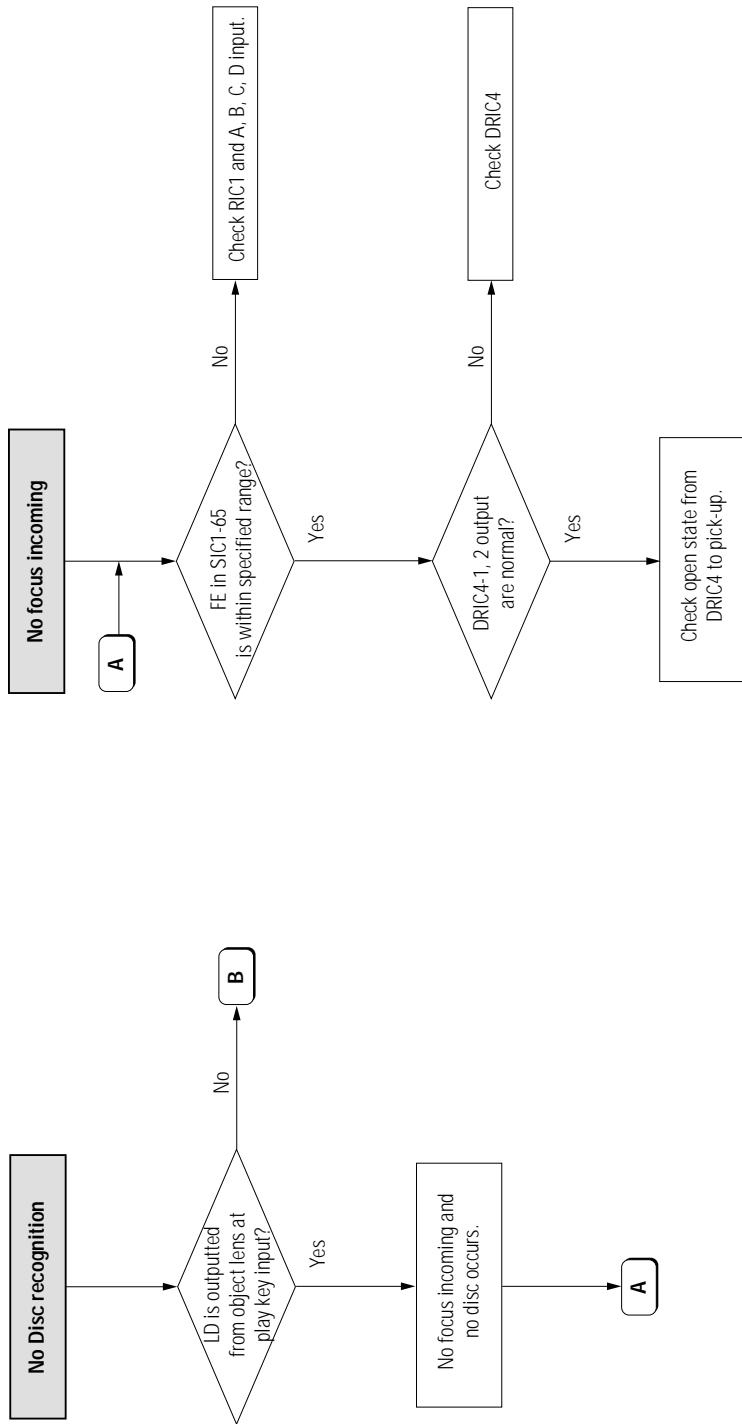


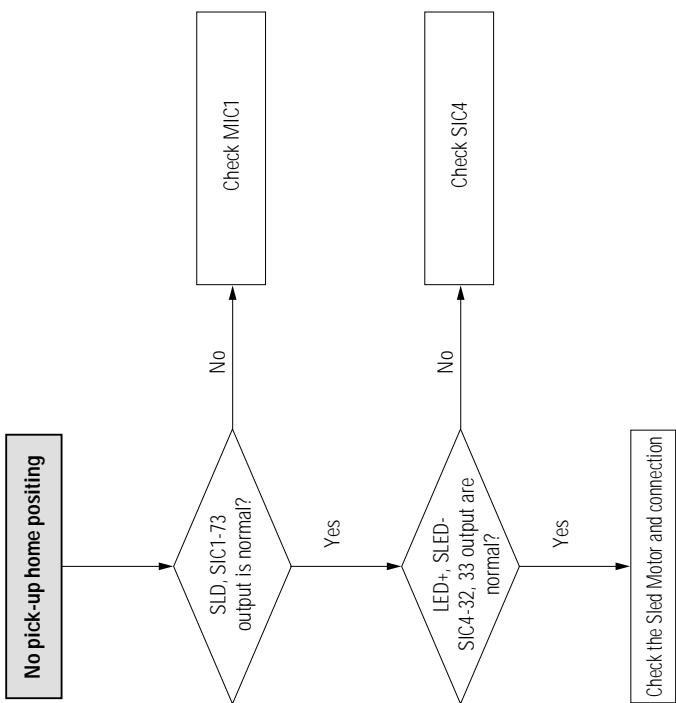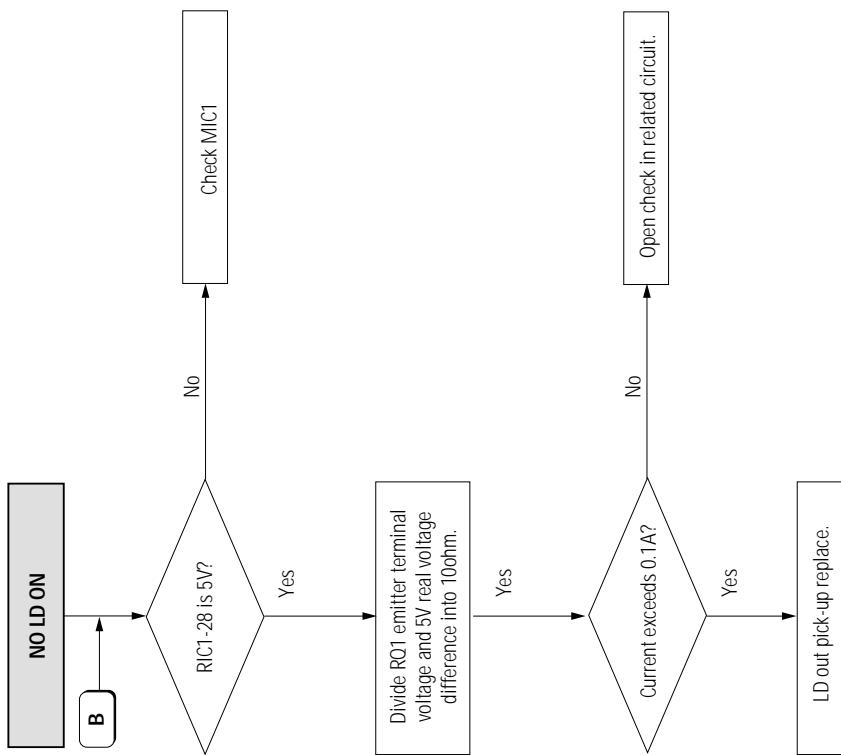


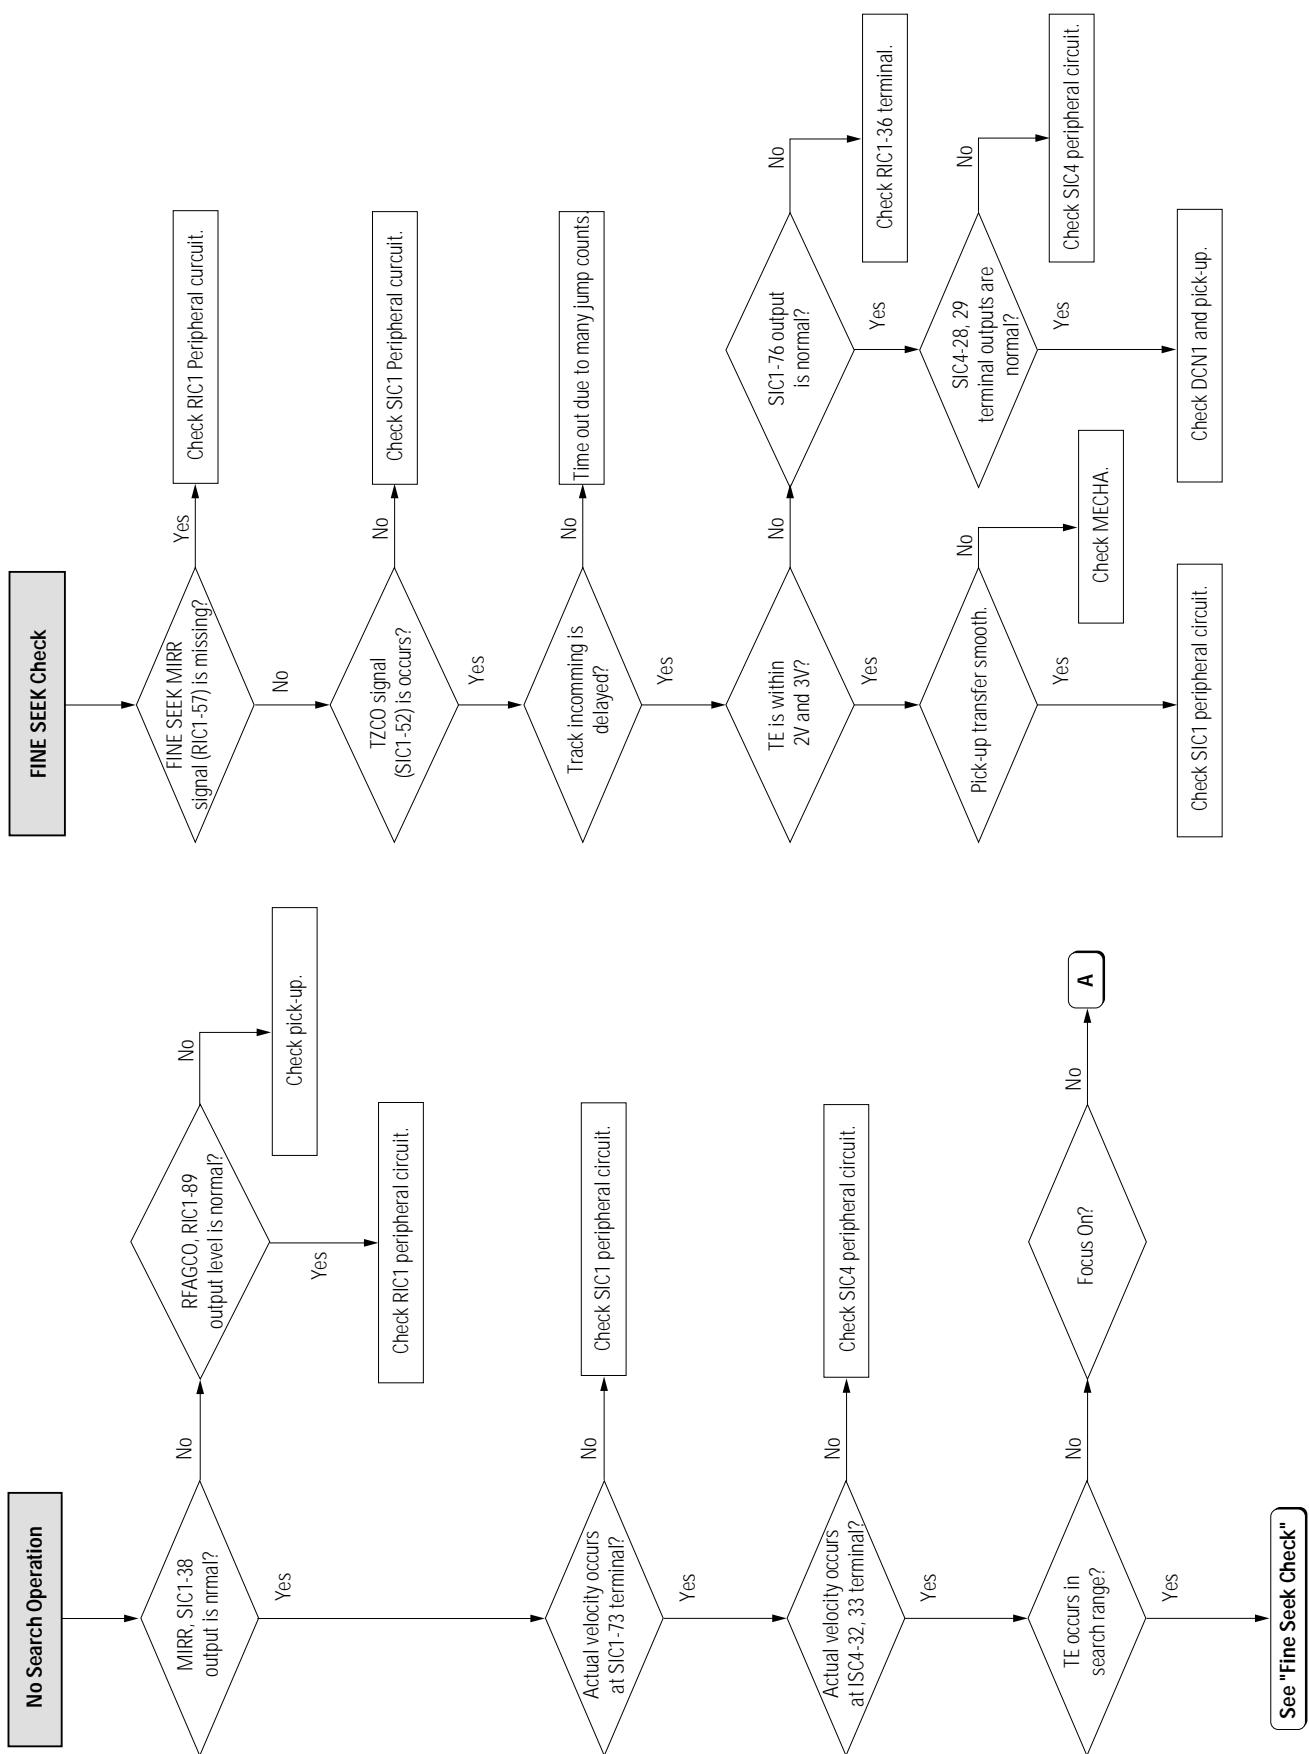


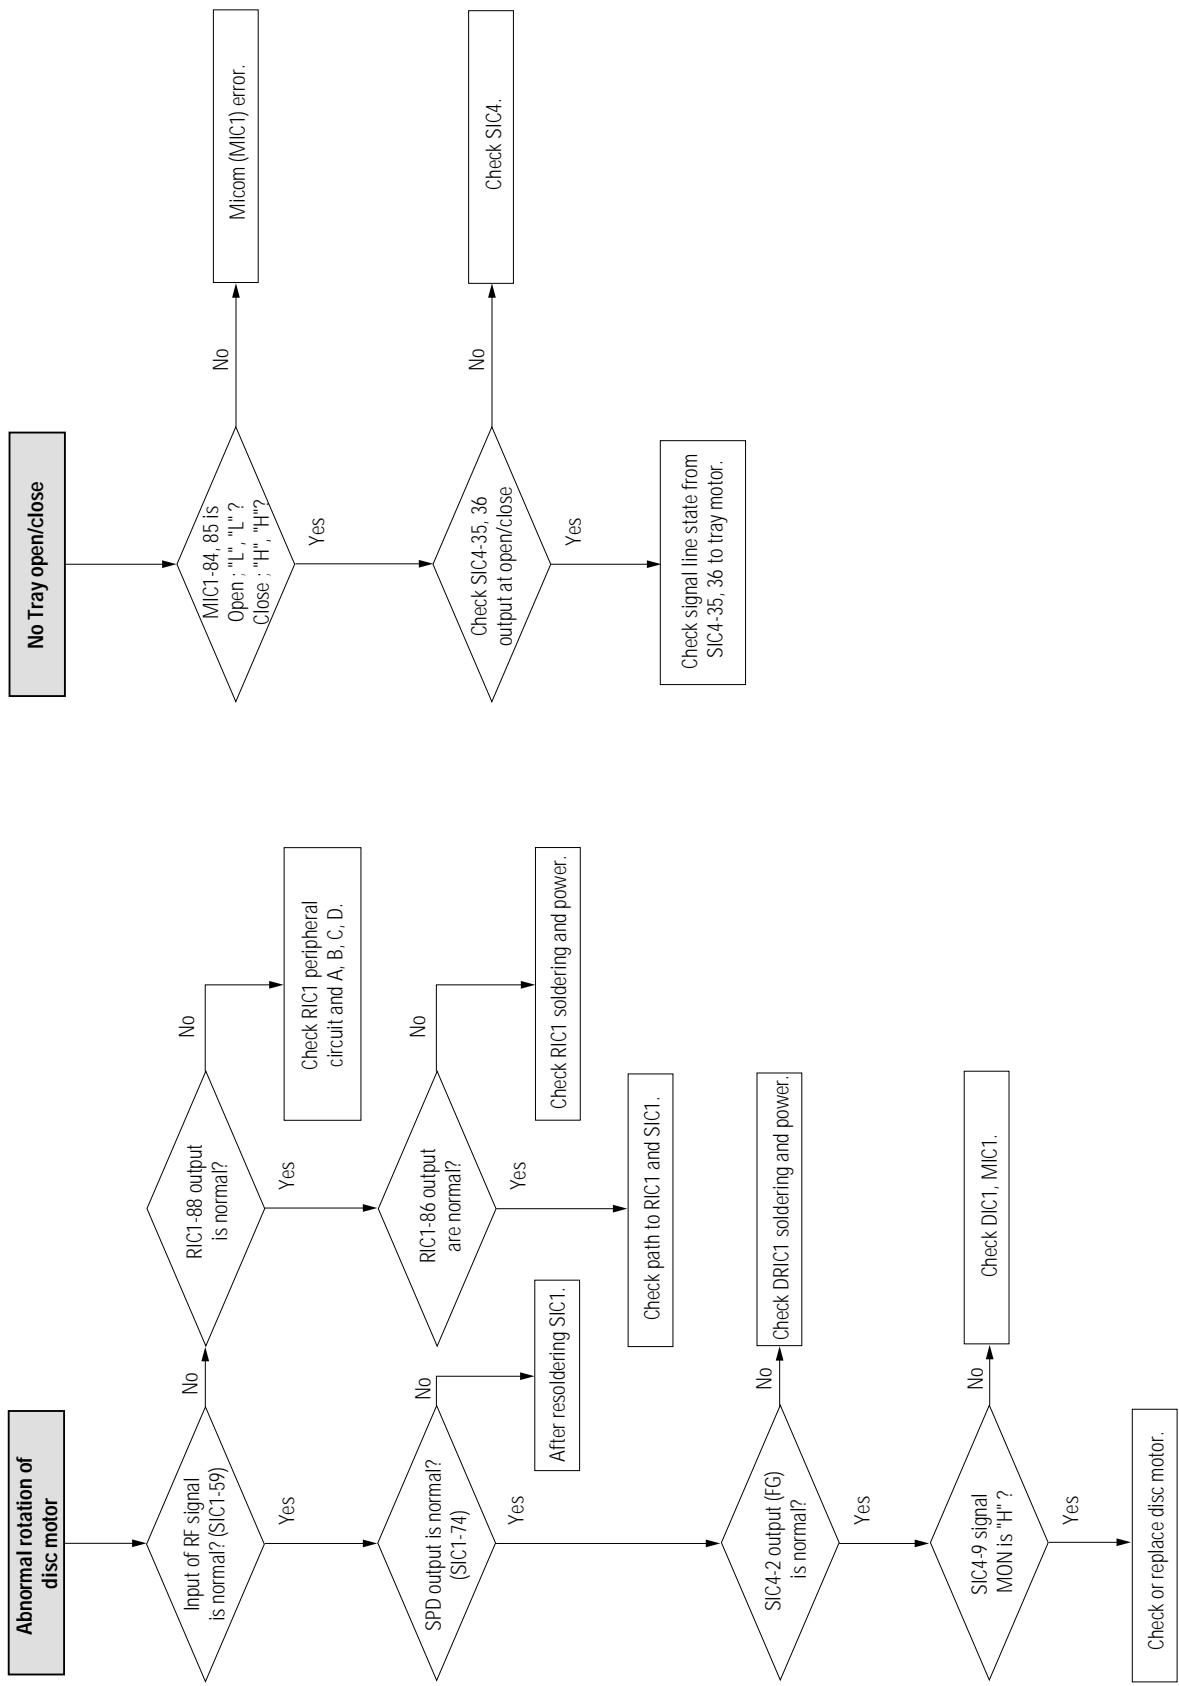


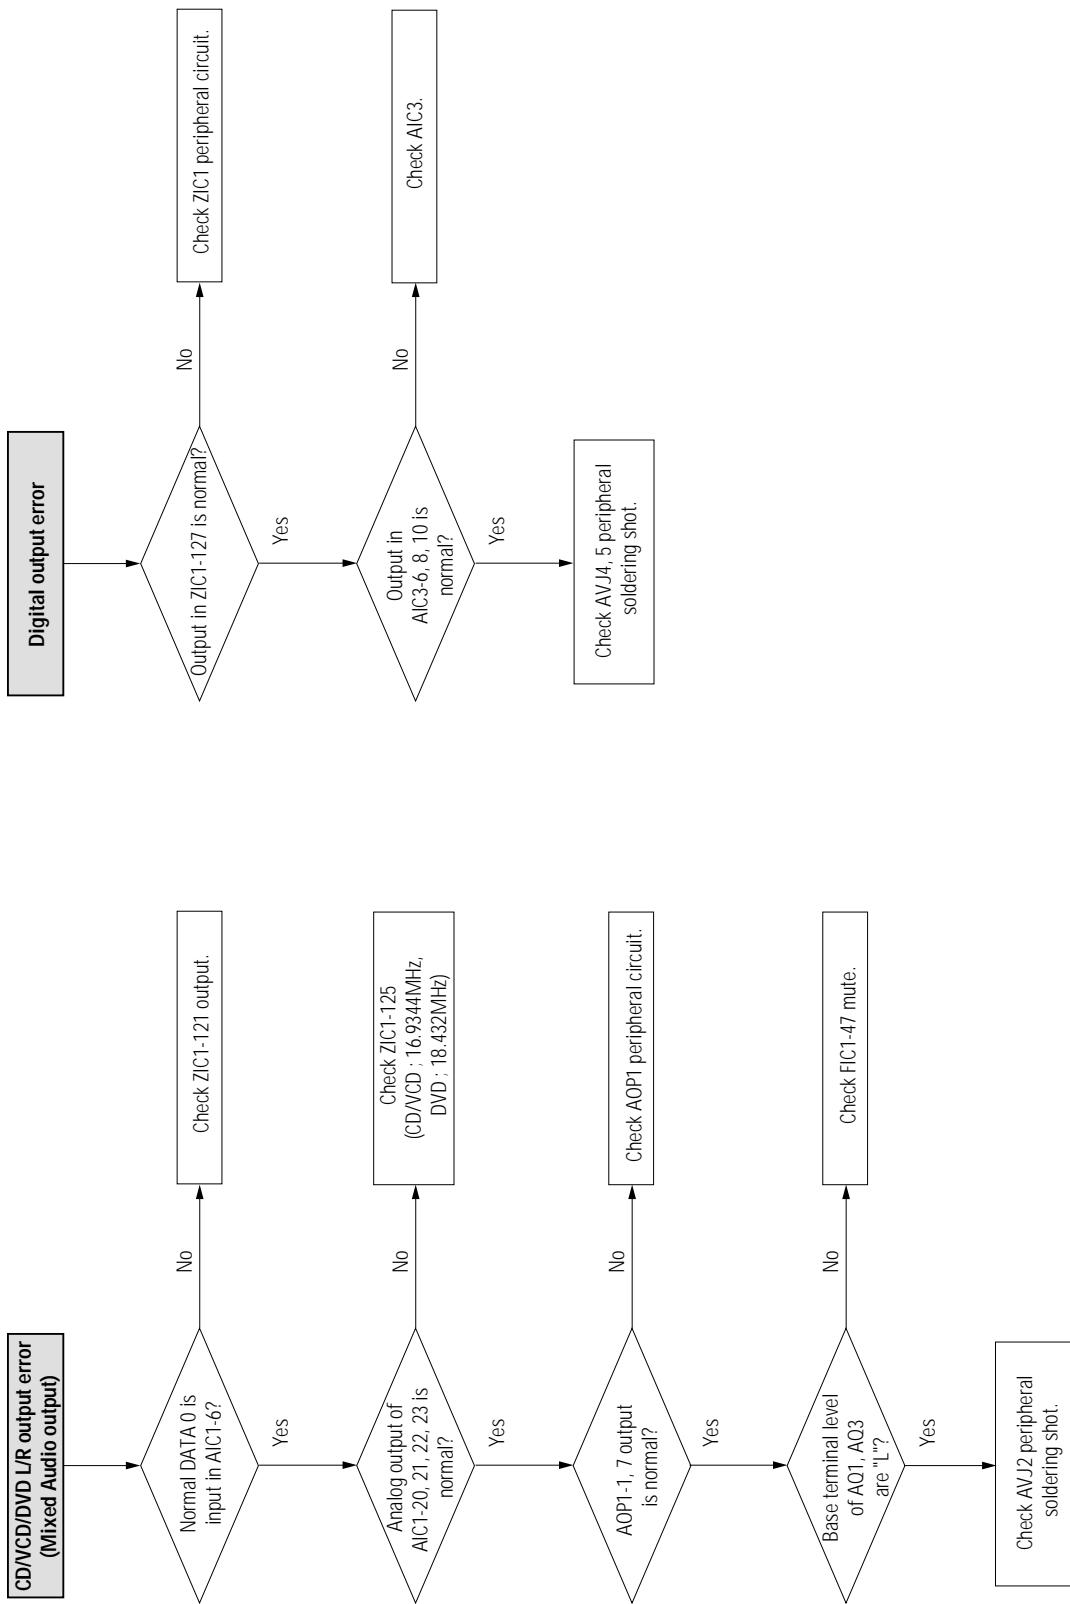

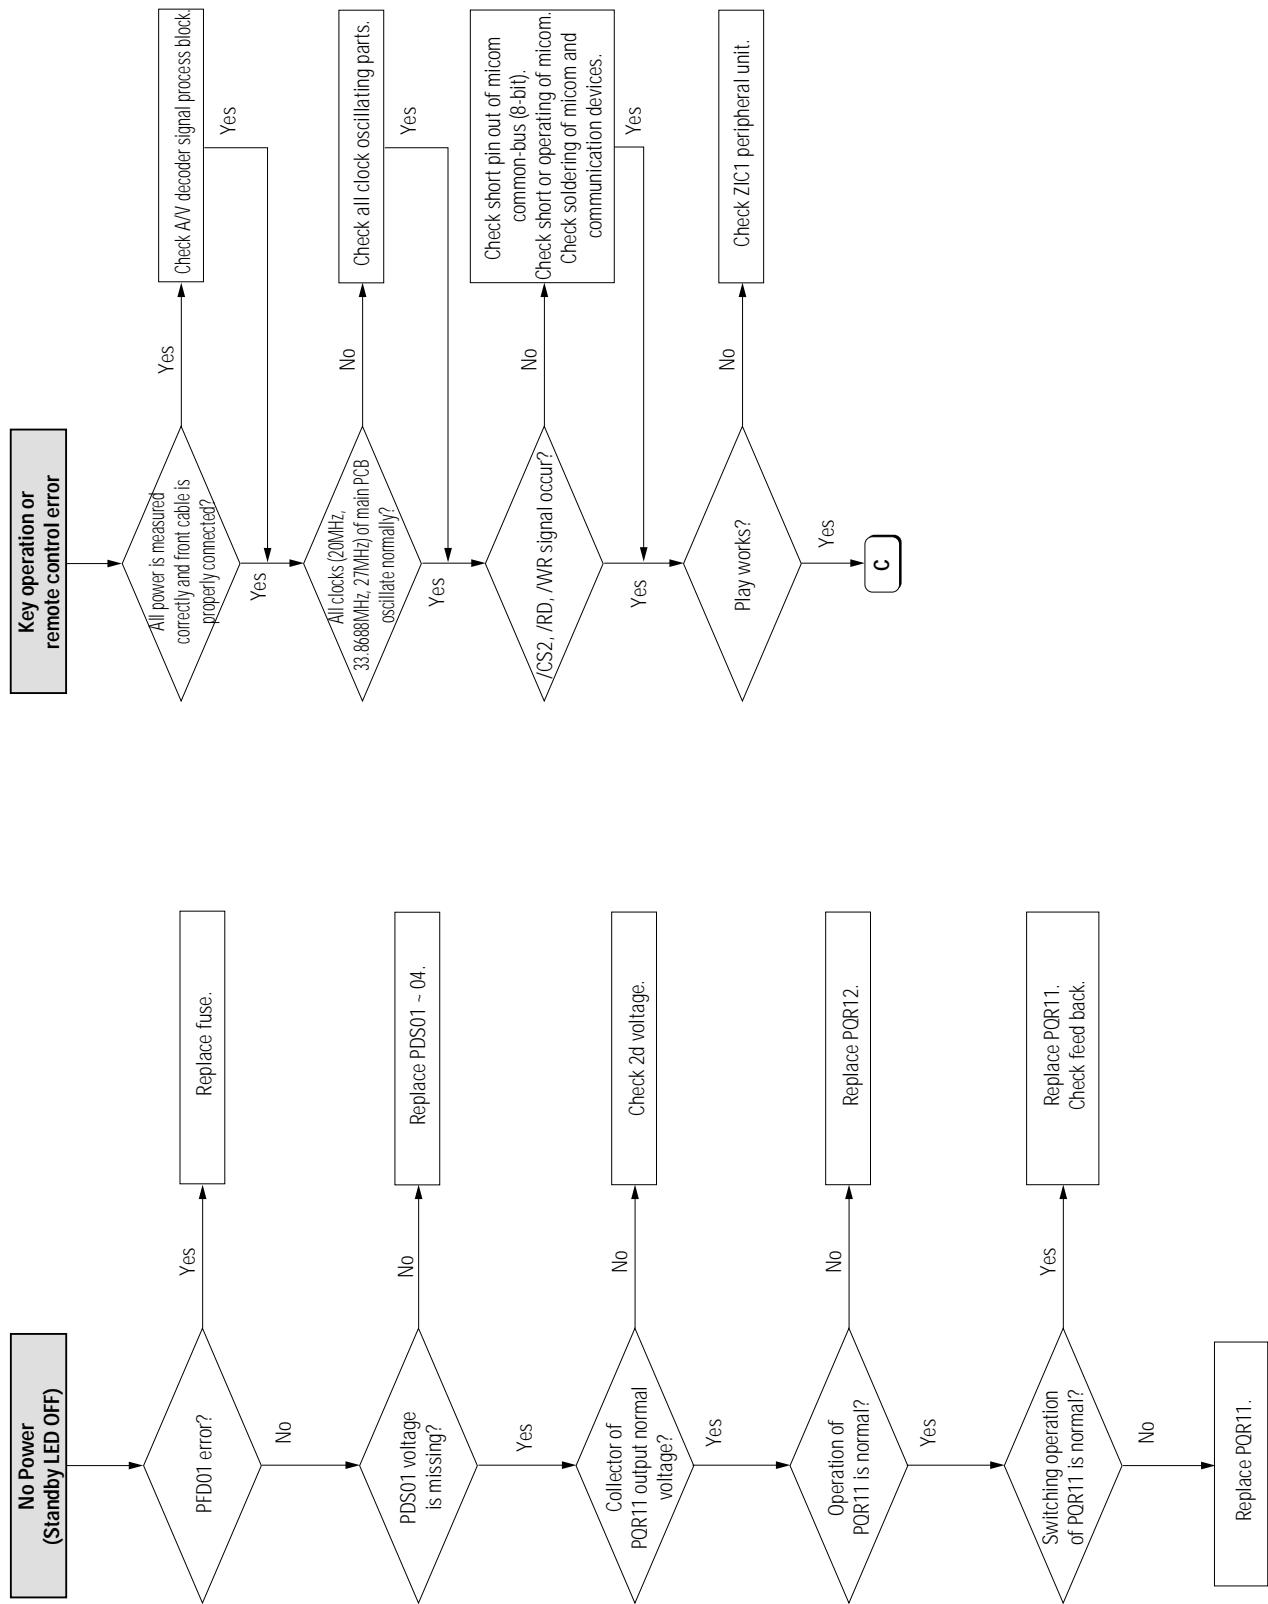

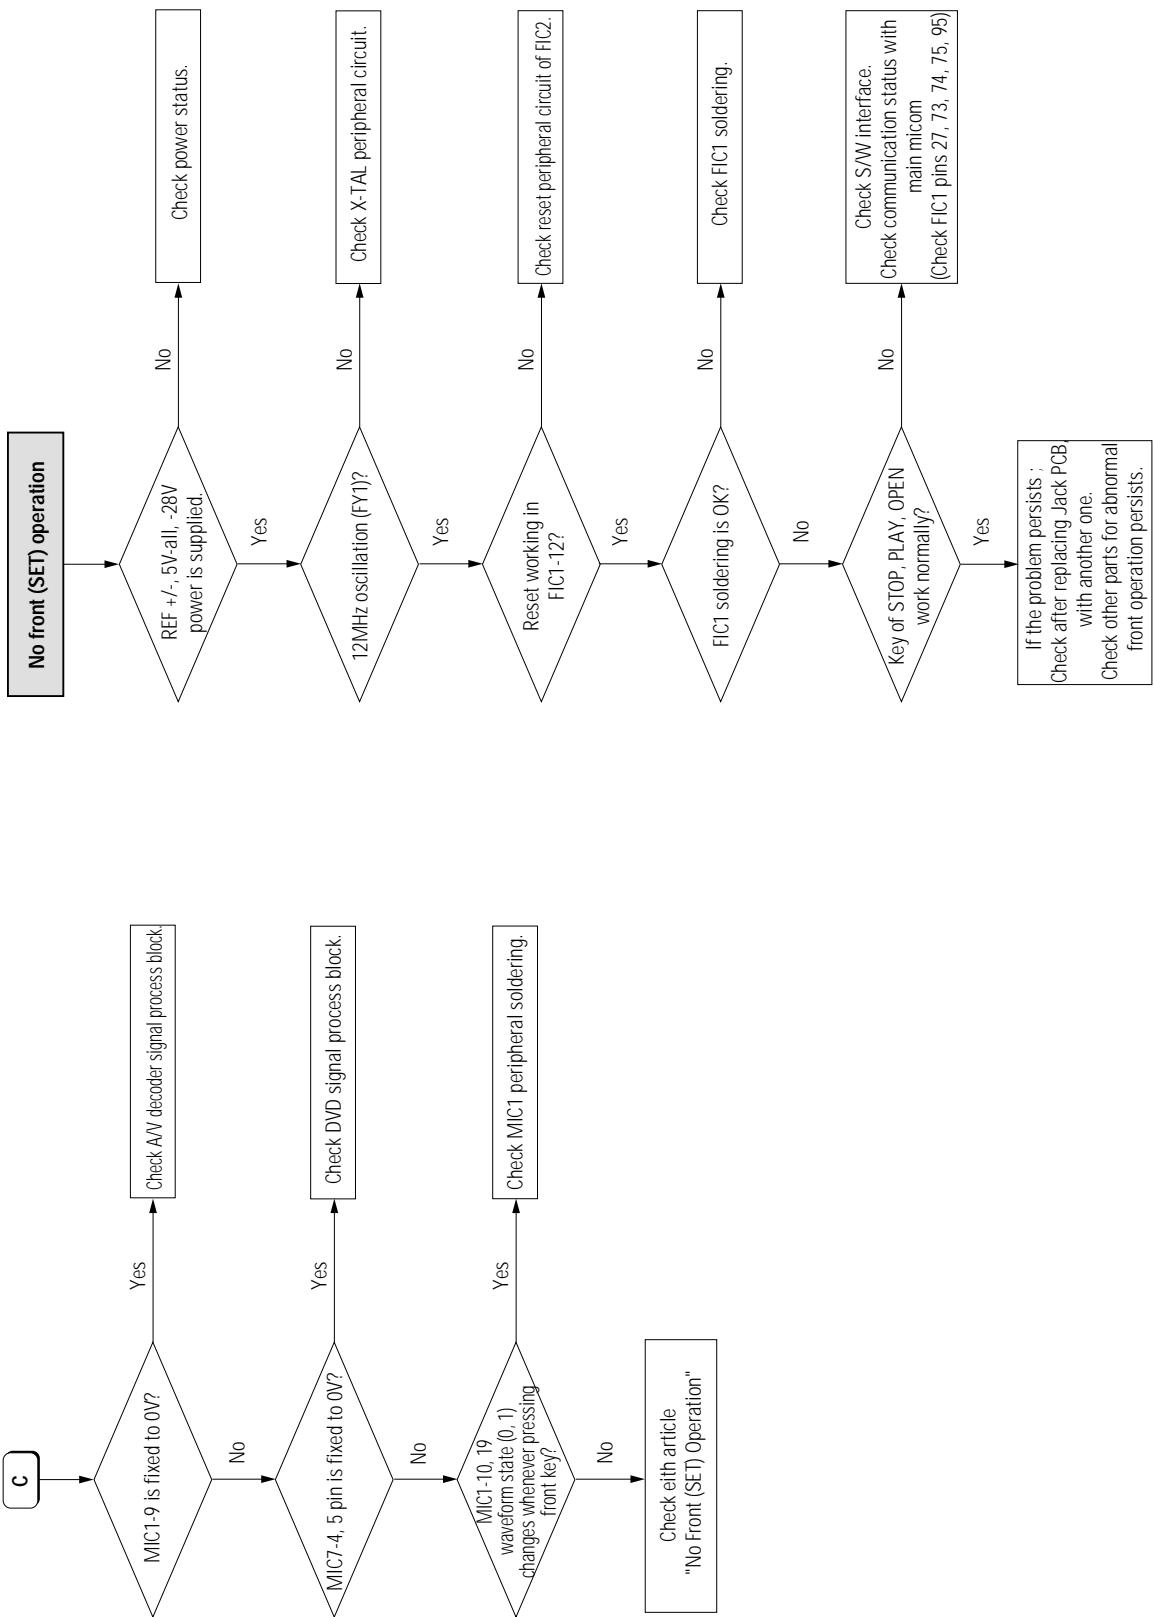

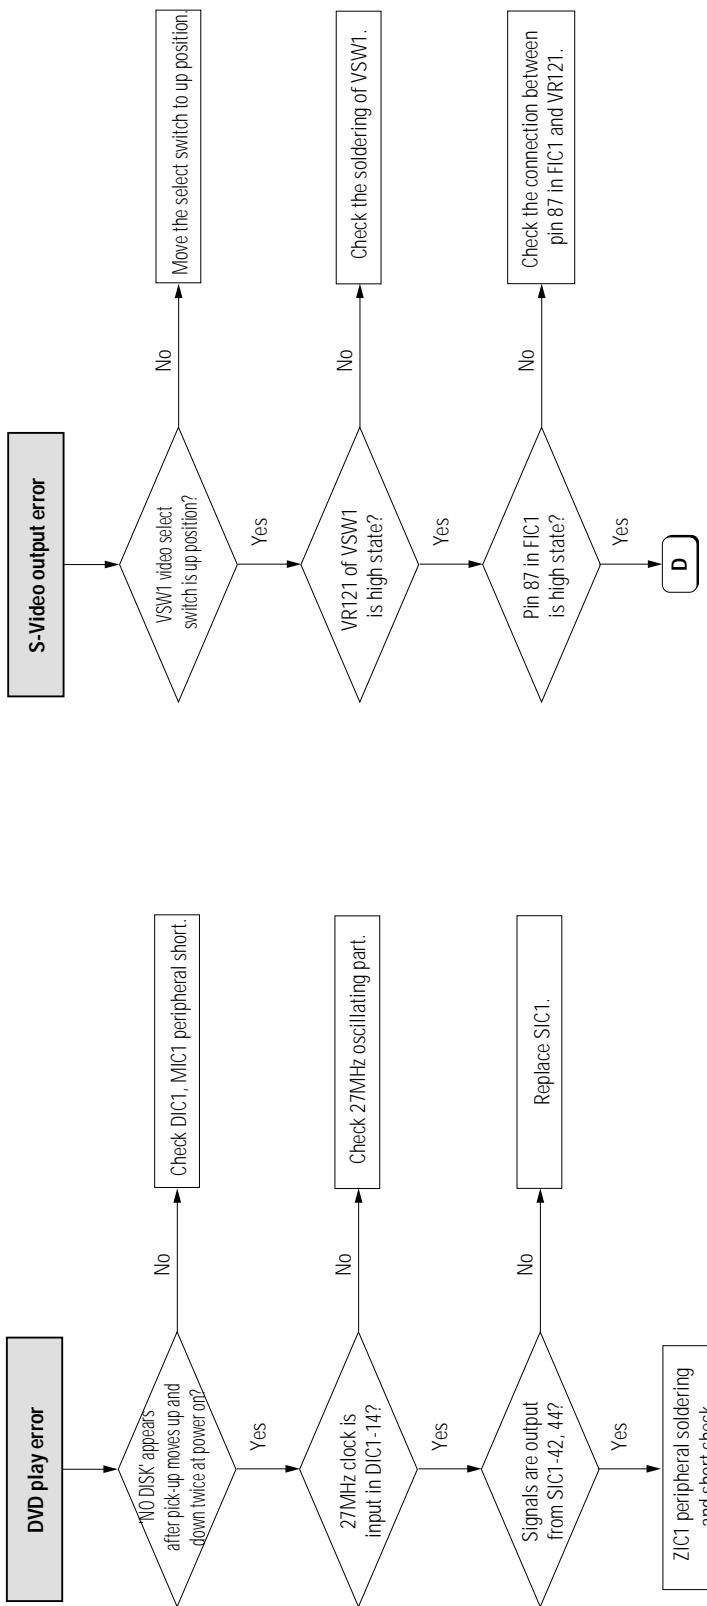

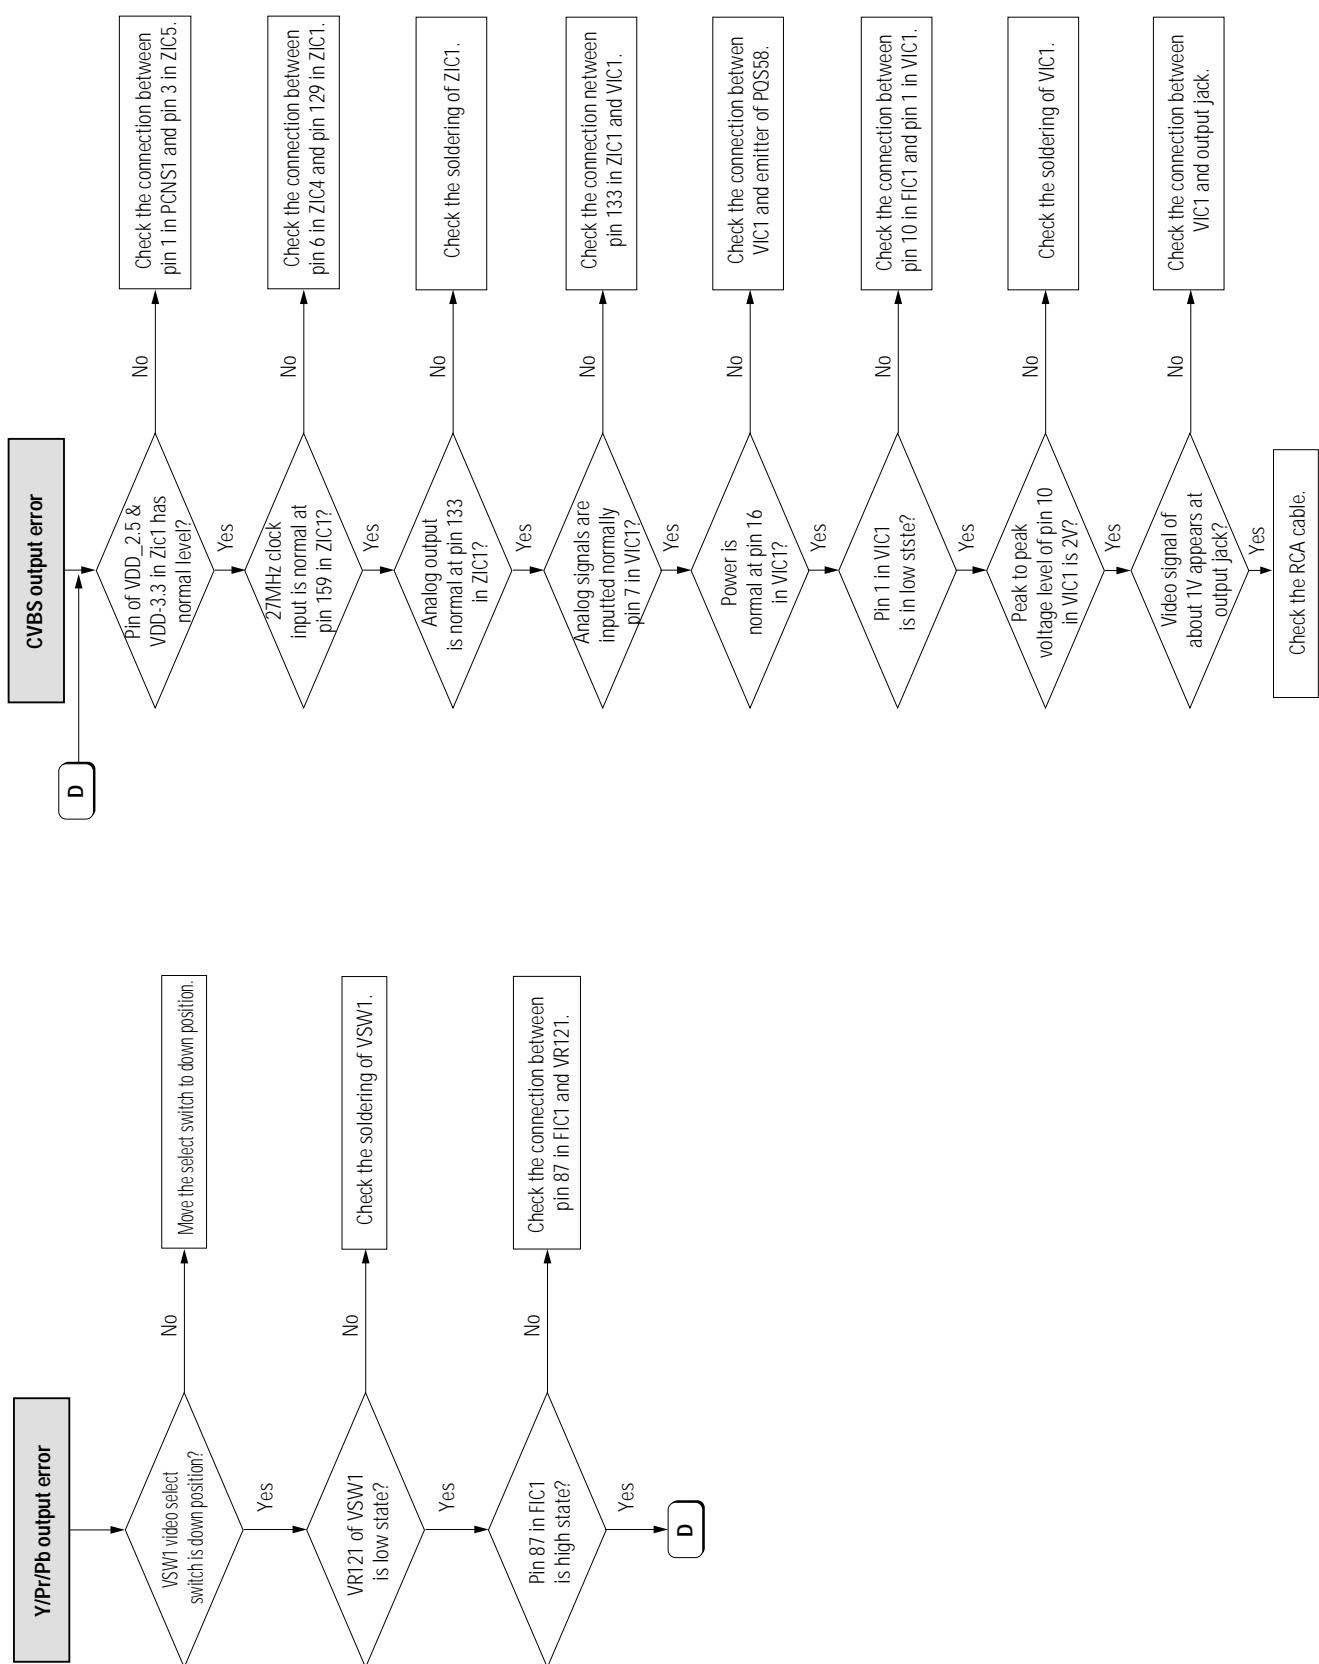


MEMO

7. Exploded View and Parts List


| | Page |
|---|------------|
| 7-1 Cabinet Assembly (DVD-611) - - - - - | 7-2 |
| 7-2 Cabinet Assembly (DVD-511) - - - - - | 7-4 |
| 7-3 Deck Assembly - - - - - | 7-6 |

7-1 Cabinet Assembly (DVD-611)

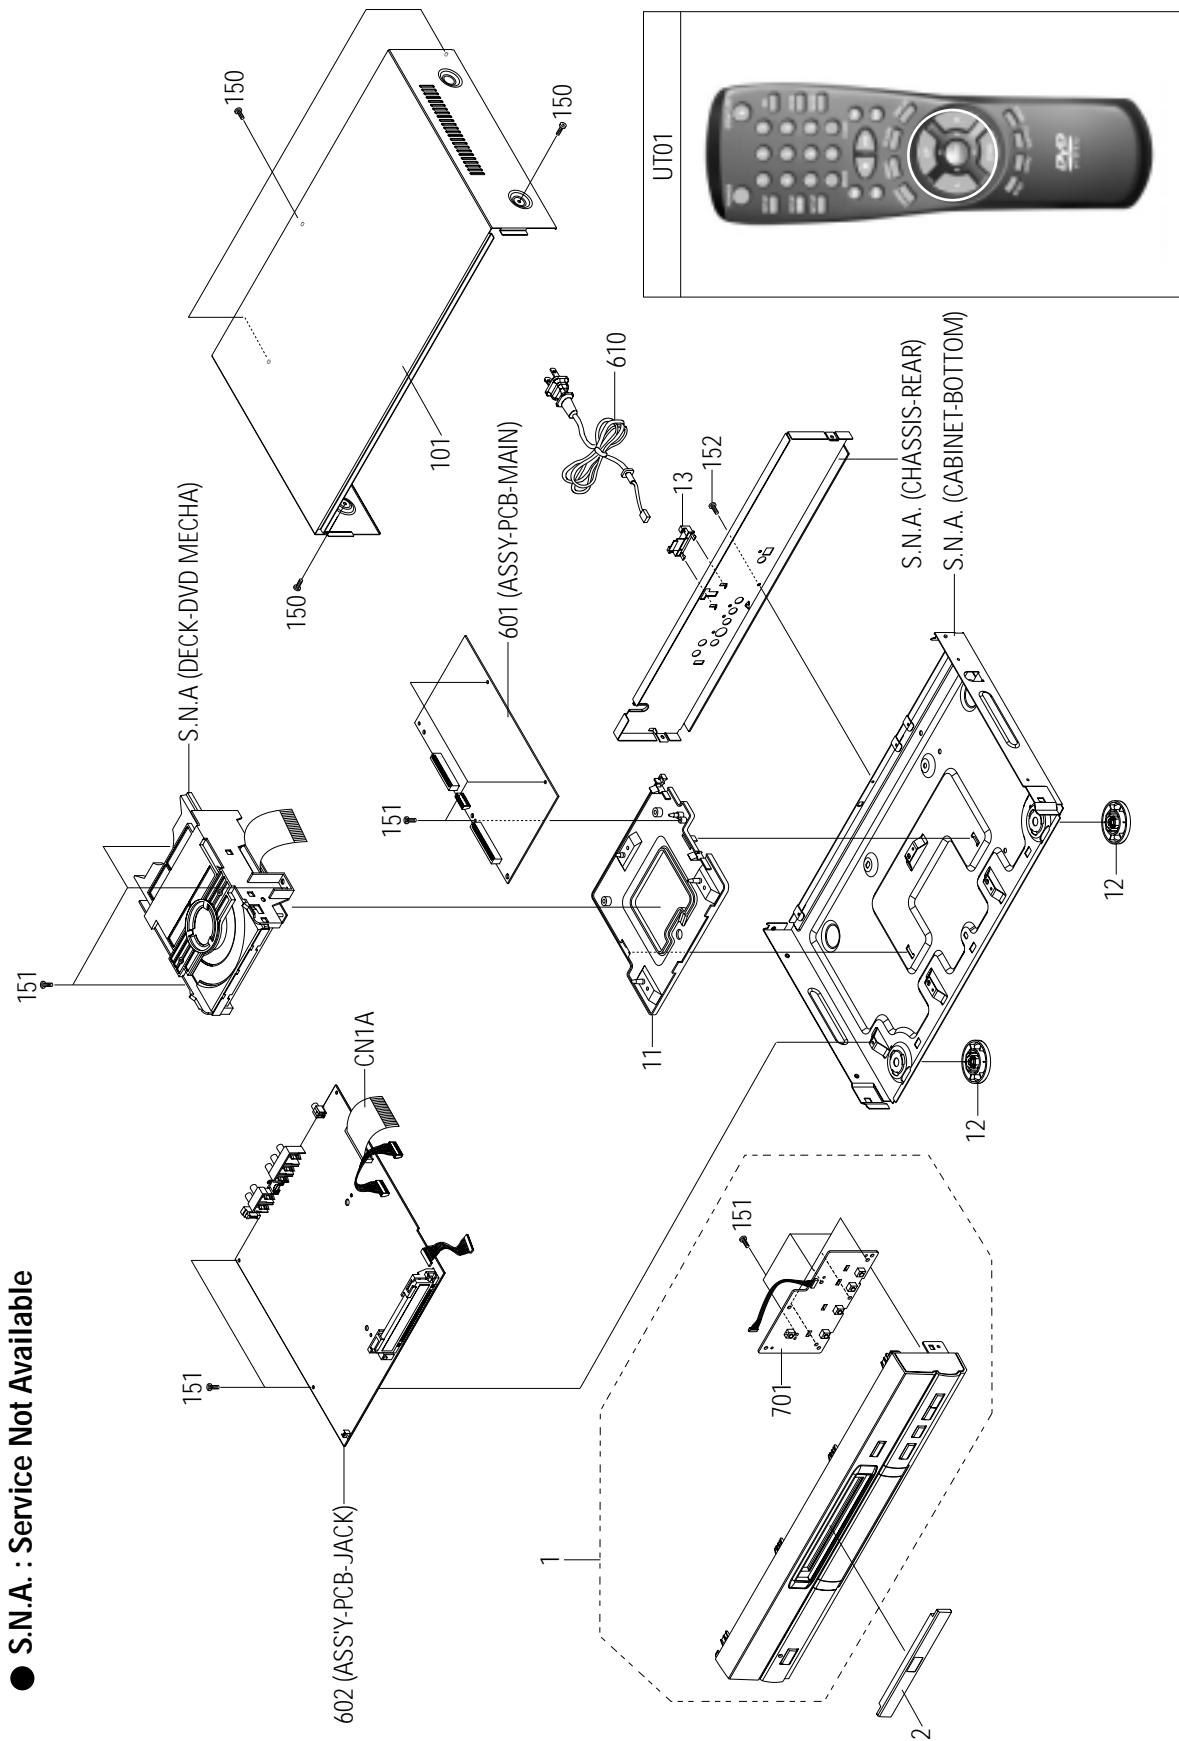


| Loc. No | Parts No. | Description ; Specification | Remark |
|----------------|------------------|---|---------------|
| 1 | AH97-00359A | ASSY FRONT CABINET;DVD-611/XAA,ASSY,XAA | |
| 2 | AH97-00364A | ASSY-DOOR;DVD-611,ASS'Y,- | |
| 11 | AH61-00301A | HOLDER-DECK:-,HIPS94V2,-,BLK,-,DVD-811 | |
| 12 | AH64-80001E | FOOT-FRONT:-,ABS94,HB,T2,SIL,H/STAMP,DVD | |
| 13 | AH61-00303A | HOLDER-CORD POWER:-,ABS 94HB,-,BLK,-,DVD | |
| 101 | AH64-00489A | CABINET TOP:-,PCM T0.65,-,-,-,BLK,-,DVD- | |
| 150 | 6003-000275 | SCREW-TAPITITE:BH,+,B,M3,L10,BLK,SWCH1018 | |
| 151 | 6003-000276 | SCREW-TAPITITE:BH,+,B,M3,L10,ZPC(YEL),SWC | |
| 152 | 6003-000282 | SCREW-TAPITITE:BH,+,B,M3,L8,ZPC(BLK),SWCH | |
| 601 | AH92-00337B | ASSY PCB-MAIN;DVD-611/XAA,MAIN PCB | |
| 602 | AH92-00338D | ASSY PCB-JACK;DVD-611/XAA,JACK PCB | |
| 610 | AC39-10200N | POWER-CORD;EP2,SPT-2,AWG#18,1.8MT,WAFER, | |
| 701 | AH92-00583A | ASSY PCB-KEY;DVD-611/XAA,KEY PCB | |
| CN1A | 3809-001180 | CABLE-FLAT:30V,-30to+80C,80mm,35P,1.25mm | |
| UT01 | AH59-00056A | REMOCON-ASS'Y:-,-,-,-,DVD-611,XAA | |

7-2 Cabinet Assembly (DVD-511)

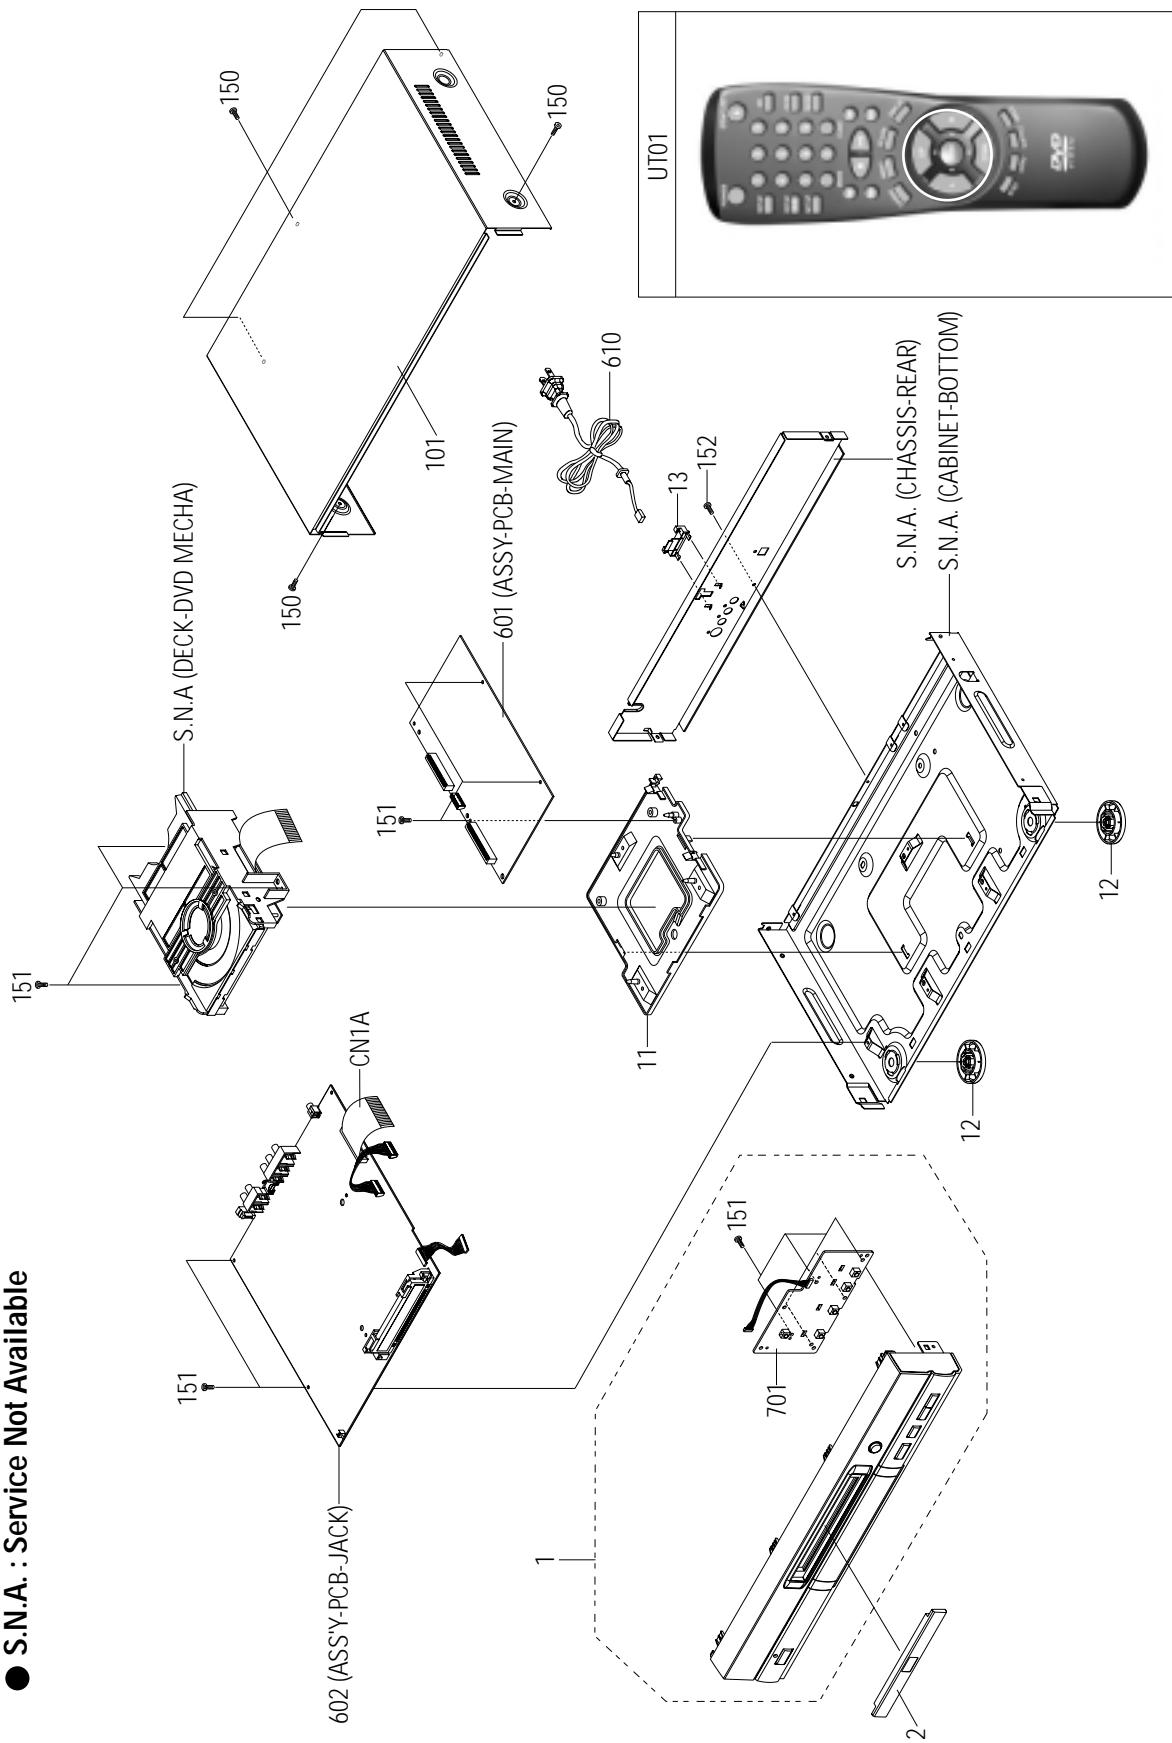

| Loc. No | Parts No. | Description ; Specification | Remark |
|---------|-------------|---|--------|
| 1 | AH97-00360A | ASSY FRONT CABINET;DVD-610/XAA,ASSY,XAA | |
| 2 | AH97-00365A | ASSY-DOOR;DVD-610,ASS'Y,- | |
| 11 | AH61-00301A | HOLDER-DECK:-,HIPS94V2,-,BLK,-,DVD-811 | |
| 12 | AH64-80001E | FOOT-FRONT:-,ABS94,HB,T2,SIL,H/STAMP,DVD | |
| 13 | AH61-00303A | HOLDER-CORD POWER:-,ABS 94HB,-,BLK,-,DVD | |
| 101 | AH64-00489A | CABINET TOP:-,PCM T0.65,-,-,-,BLK,-,DVD- | |
| 150 | 6003-000275 | SCREW-TAPITITE:BH,+,B,M3,L10,BLK,SWCH1018 | |
| 151 | 6003-000276 | SCREW-TAPITITE:BH,+,B,M3,L10,ZPC(YEL),SWC | |
| 152 | 6003-000282 | SCREW-TAPITITE:BH,+,B,M3,L8,ZPC(BLK),SWCH | |
| 601 | AH92-00337B | ASSY PCB-MAIN;DVD-611/XAA,MAIN PCB | |
| 602 | AH92-00338E | ASSY PCB-JACK;DVD-511/XAA,JACK PCB | |
| 610 | AC39-10200N | POWER-CORD;EP2,SPT-2,AWG#18,1.8MT,WAFER, | |
| 701 | AH92-00582A | ASSY PCB-KEY;DVD-511/XAA,KEY PCB | |
| CN1A | 3809-001180 | CABLE-FLAT:30V,-30to+80C,80mm,35P,1.25mm | |
| UT01 | AH59-00056A | REMOCON-ASS'Y:-,-,-,-,DVD-611,XAA | |

7-3 Deck Assembly

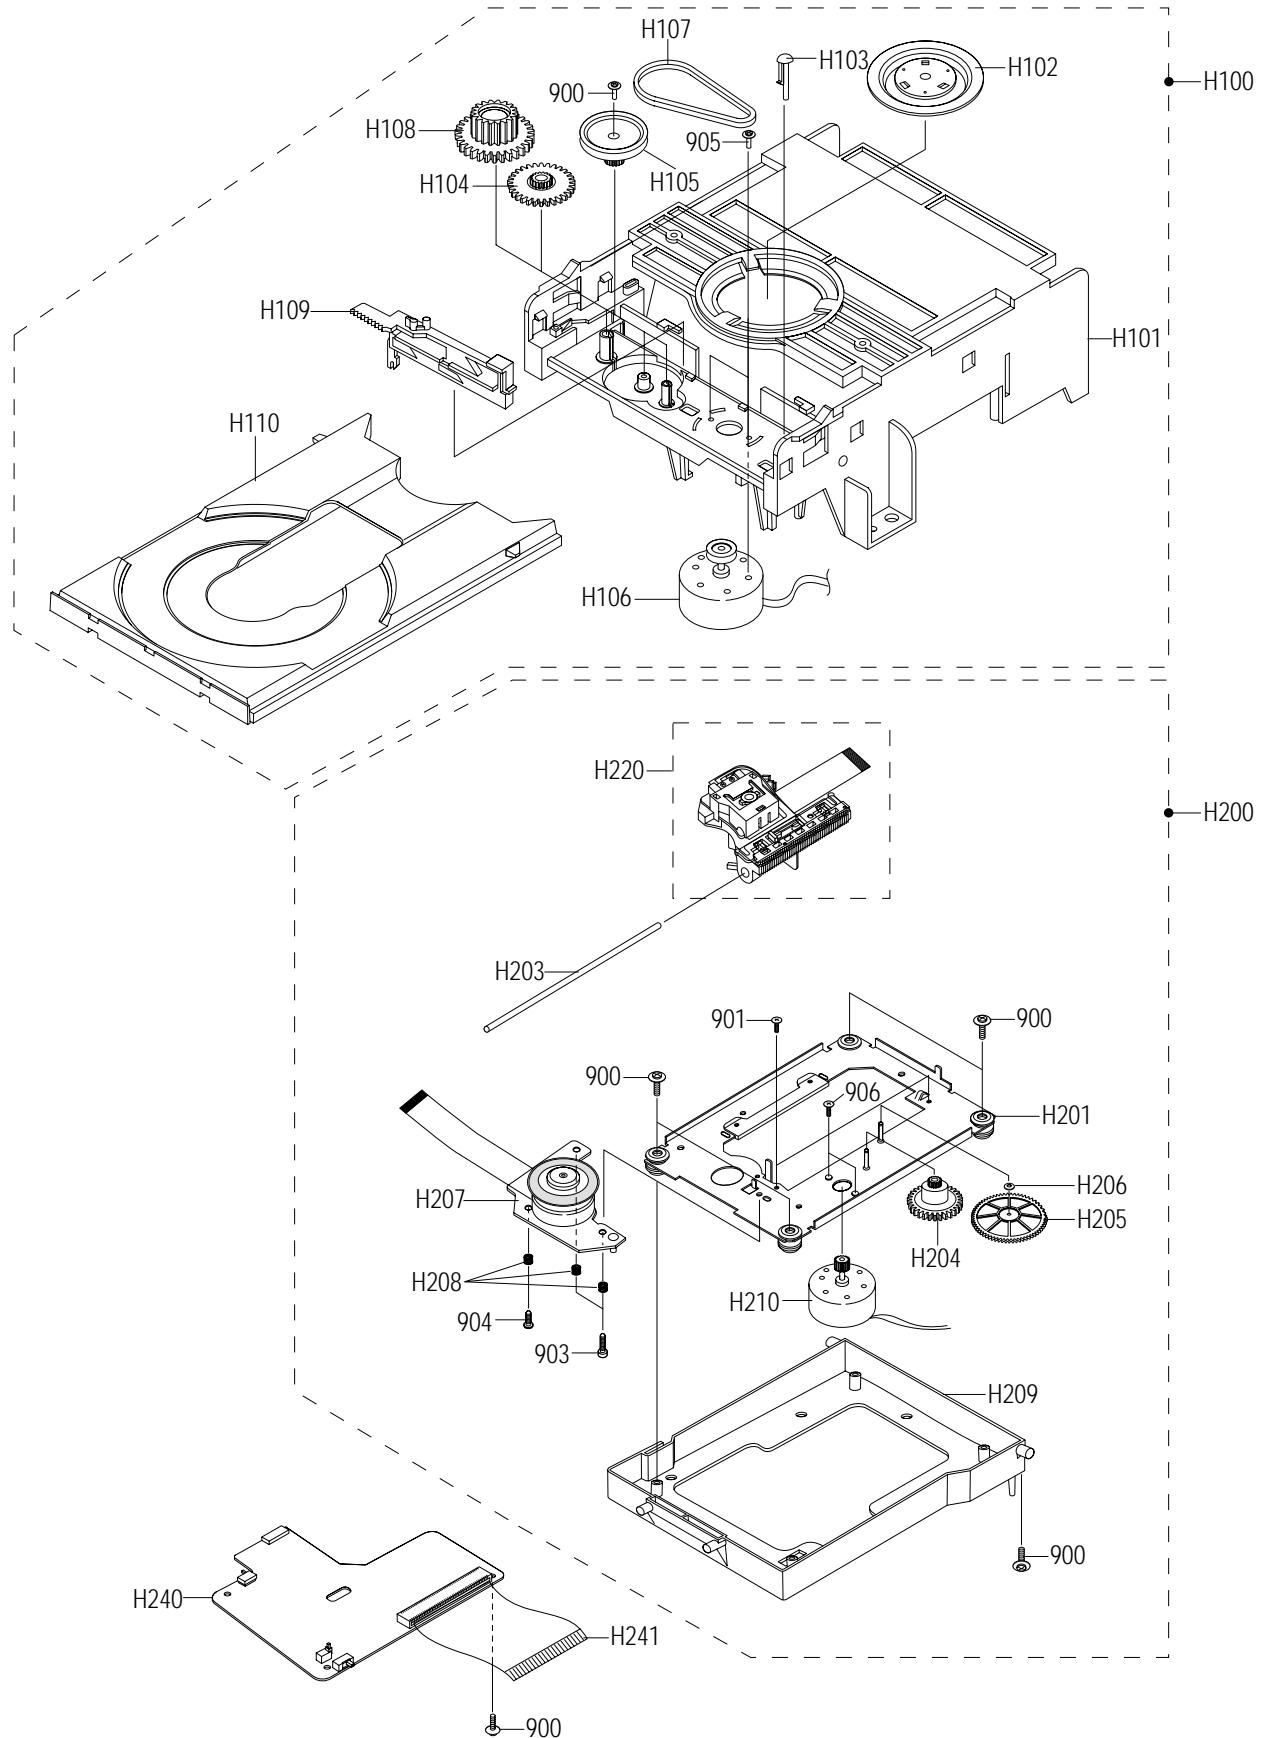

| Loc. No | Parts No. | Description ; Specification | Remark |
|---------|-------------|---|--------|
| 900 | 6003-001157 | SCREW-TAPTITE;PWH,+,B,M2,L6,ZPC(YEL),SWR | |
| 901 | 6001-001332 | SCREW-MACHINE;FH,+,M2,L8,ZPC(YEL),SWRCH1 | |
| 903 | 6001-001333 | SCREW-MACHINE;SOCKET,HEX,M2.6,L8,ZPC(YEL) | |
| 904 | 6001-001196 | SCREW-MACHINE;BH,+-,M2,L4,ZPC(YEL),SWRCH | |
| 905 | BG60-10020A | SCREW-SP MOTOR;-,BHW TOOTH,,-,M1.7,L3- | |
| 906 | AH60-00010A | SCREW-MACHINE-MOTOR;-,+SWCH18AK,M1.7,L2 | |
| H100 | AH61-00391A | HOUSING-ASSY;DP-5,ABS+POM,,-,-,-,-,-, | |
| H101 | AH61-00272A | CHASSIS-HOUSING;-,ABS(SR-0320),,-,-,-,B | |
| H102 | AH66-00111A | CLAMPER-ASSY;DP-5,POM+MAGNET,,-,-,DP-5 | |
| H103 | AH66-00080A | LEVER-S/W;WHITE,,-,-,-,-,- | |
| H104 | AH66-00074A | GEAR-HOUSING;-,POM M90-44,,-,-,-,-,- | |
| H105 | AH66-00072A | PULLEY-GEAR;-,POM M90-44,,-,-,- | |
| H106 | AH31-00015A | MOTOR-LOAD ASSY;-,DP-5,-,- | |
| H107 | AH66-00112A | BELT-PULLEY;-,CR,T1.5,OD30,,-,DP-5 | |
| H108 | AH66-00073A | GEAR-TRAY;-,POM M90-44,,-,-,-,-,- | |
| H109 | AH66-00079A | SLIDER-HOUSING;DP-5,,-,-,PBT #2002K,- | |
| H110 | AH66-00081A | TRAY-DISC;-,ABS(GF) VG4820,-,BLK,-,DP-5 | |
| H200 | AH97-00369A | ASSY-P/U DECK;DP-5,-,- | |
| H201 | AH97-00410A | ASSY-BRKT-SUB;SECC+RUBBER+MOTOR,DP-5,- | |
| H203 | AH61-50327A | SHAFT-P/U;DPSUS420J2,OD3,L84.7,S/FINISH | |
| H204 | AH66-00075A | GEAR-FEED A;-,POM M90-44,,-,-,-,-,- | |
| H205 | AH66-00076A | GEAR-FEED B;-,POM M90-44,,-,-,-,-,- | |
| H206 | AC60-30306A | WASHER-SLIT;-,ID2.1,OD5.0,T0.5,-,POLYS | |
| H207 | AH31-00017A | MOTOR-SPINDLE ASSY;-,DP-5,-,- | |
| H208 | AH61-00403A | SPRING-SPINDLE;-,SWPB,-,CS,PI4.9,PI0.7,- | |
| H209 | AH61-00273A | CHASSIS-SUB;-,ABS(SR-0320),,-,-,-,BLK,- | |
| H210 | AH31-00016A | MOTOR-FEED ASSY;-,DP-5,-,- | |
| H220 | AH30-00008A | PICK UP-ASSY;VALINO(1LD) | |
| H240 | AH92-00608A | ASSY PCB-DECK;VALINO DECK 1L | |
| H241 | 3809-001181 | CABLE-FLAT;30V,-30to+80C,80mm,40P,1.25mm | |

MEMO

8. Electrical Parts List

| Loc.No | Part No | Description ; Specification | Remark | Loc.No | Part No | Description ; Specification | Remark |
|--------|-------------|--|-------------|--------|-------------|--|--------|
| 601 | AH92-00337B | ASSY PCB-MAIN;DVD-611,MAIN PCB | DVD-611/511 | MR10 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| CN8 | 3708-001364 | CONNECTOR-FPC/FC/PIC:35P,1.25MM,STRAIGHT | | MR11 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC1 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | | MR12 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC10 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR13 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC12 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR14 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC13 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR15 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC14 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR2 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC15 | 2203-001640 | C-CERAMIC,CHIP:0.39nF,10%,50V,X7R,TP,160 | | MR3 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC16 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR4 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC2 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | | MR5 | 2007-000109 | R-CHIP:1Mohm,5%,1/16W,DA,TP,1608 | |
| DC23 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR6 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | |
| DC24 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR7 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | |
| DC3 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR8 | 2007-000078 | R-CHIP:1Kohm,5%,1/16W,DA,TP,1608 | |
| DC4 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MR9 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| DC5 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | MY1 | 2801-000199 | CRYSTAL-UNIT:20MHz,50ppm,28-AAA,16p,500 | |
| DC7 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | PC1 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| DCN1 | 3708-001085 | CONNECTOR-FPC/FC/PIC:40P,1.25mm,STRAIGHT | | PC2 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| DIC1 | AH13-10030P | IC-ASIC:-KS1453,TQFP,128P,DATA PRO. I | | PC3 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| DIC2 | 1105-001233 | IC-DRAM:416C256,256KX16BIT,SQJ,40P,400MI | | PC4 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| DIC3 | 0801-002097 | IC-CMOS LOGIC:7SET08,AND GATE,SOP5P,110 | | PCN1 | 3711-003358 | CONNECTOR-HEADER:BOX:8P,1R,2.5mm,STRAIGH | |
| DR1 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | PE1 | 2401-002165 | C-AL:100uF,20%,16V,GP,TP,6.3x7.5 | |
| DR16 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | PE2 | 2401-002165 | C-AL:100uF,20%,16V,GP,TP,6.3x7.5 | |
| DR17 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | PE3 | 2401-002165 | C-AL:100uF,20%,16V,GP,TP,6.3x7.5 | |
| DR18 | 2007-000070 | R-CHIP:0ohm,5%,1/16W,DA,TP,1608 | | PE4 | 2401-002165 | C-AL:100uF,20%,16V,GP,TP,6.3x7.5 | |
| DR19 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | | RC1 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| DR2 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | RC10 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| DR20 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | | RC11 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| DR21 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | | RC12 | 2203-000560 | C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP, | |
| DR22 | 2007-000109 | R-CHIP:1Mohm,5%,1/16W,DA,TP,1608 | | RC13 | 2203-000560 | C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP, | |
| DR3 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | RC14 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| DR4 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | RC16 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| DR5 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | RC17 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| DR7 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | RC2 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| DR8 | 2011-000816 | R-NETWORK:100ohm,5%,63mW,L,CHIP,8P,TP | | RC20 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| DR9 | 2011-000816 | R-NETWORK:100ohm,5%,63mW,L,CHIP,8P,TP | | RC21 | 2203-000384 | C-CERAMIC,CHIP:0.015nF,5%,50V,NP0,TP,160 | |
| MC1 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC22 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC10 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC23 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC11 | 2203-000626 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,160 | | RC24 | 2203-001697 | C-CERAMIC,CHIP:0.082nF,5%,50V,NP0,TP,160 | |
| MC12 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC25 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC13 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC26 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC14 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC27 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC15 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC28 | 2203-001052 | C-CERAMIC,CHIP:0.56nF,10%,50V,X7R,TP,160 | |
| MC16 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC29 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC17 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC3 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC2 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC30 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC3 | 2203-000626 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,160 | | RC32 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC4 | 2203-000426 | C-CERAMIC,CHIP:0.018nF,5%,50V,NP0,TP,160 | | RC33 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC5 | 2203-000426 | C-CERAMIC,CHIP:0.018nF,5%,50V,NP0,TP,160 | | RC34 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MC6 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC35 | 2203-000236 | C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,1608 | |
| MC7 | 2203-000626 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,160 | | RC36 | 2203-000140 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,1608 | |
| MC8 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC39 | 2203-000531 | C-CERAMIC,CHIP:2.7nF,10%,50V,X7R,TP,1608 | |
| MC9 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | RC40 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| MIC1 | 0903-001185 | IC-MICROCONTROLLER:95C265,16bit,LOFP,100 | | RC41 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MIC2 | 1102-001090 | IC-EPROM:27C081,1MX8BIT,DIP,32P,600MIL,1 | | RC42 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MIC3 | 1106-000401 | IC-SRAM:681000,128Kx8BIT,SOP,32P,525MI | | RC43 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MIC4 | 1103-001133 | IC-EEPROM:24C020,256x8BIT,SOP,8P,150MIL, | | RC44 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| MIC5 | 0801-002097 | IC-CMOS LOGIC:7SET08,AND GATE,SOP5P,110 | | RC45 | 2203-001652 | C-CERAMIC,CHIP:470nF,+80-20%,16V,Y5V,TP, | |
| MIC6 | 0801-000411 | IC-CMOS LOGIC:74HC32,OR GATE,SOP,14P,150 | | RC46 | 2203-001652 | C-CERAMIC,CHIP:470nF,+80-20%,16V,Y5V,TP, | |
| MIC7 | 0801-002517 | IC-CMOS LOGIC:7SET00,NAND GATE,SOP,5P,63 | | RC47 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| MIC8A | 3704-000472 | SOCKET-IC:32P,DIP,SN,2.54mm | | RC48 | 2203-001652 | C-CERAMIC,CHIP:470nF,+80-20%,16V,Y5V,TP, | |
| MR1 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | RC49 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| | | | | RC50 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| | | | | RC51 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |

| Loc.No | Part No | Description : Specification | Remark | Loc.No | Part No | Description : Specification | Remark |
|--------|-------------|---|--------|--------|-------------|---|--------|
| RC52 | 2203-005148 | C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608 | | RR45 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | |
| RC53 | 2203-005148 | C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608 | | RR46 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | |
| RC54 | 2203-005148 | C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,1608 | | RR47 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | |
| RC55 | 2203-000888 | C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,1608 | | RR48 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | |
| RC56 | 2203-000626 | C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160 | | RR49 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | |
| RC6 | 2203-001052 | C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,160 | | RR5 | 2104-001068 | VR-SMD:10Kohm,25%,1/20W,TOP | |
| RC7 | 2203-001640 | C-CERAMIC,CHIP;0.39nF,10%,50V,X7R,TP,160 | | RR50 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | |
| RC8 | 2203-000384 | C-CERAMIC,CHIP;0.015nF,5%,50V,NP0,TP,160 | | RR51 | 2007-000134 | R-CHIP:33Kohm,5%,1/16W,DA,TP,1608 | |
| RC9 | 2203-000257 | C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608 | | RR52 | 2007-000077 | R-CHIP:470ohm,5%,1/16W,DA,TP,1608 | |
| RD1 | 0401-000008 | DIODE-SWITCHING:DAN217.80V,100mA,SOT-23, | | RR53 | 2007-000312 | R-CHIP:100HM,5%,1/8W,DA,TP,3216 | |
| RD2 | 0403-001079 | DIODE-ZENER:UDZ3.9B,7%,200mW,SOD-323,TP | | RR57 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | |
| RD3 | 0401-000008 | DIODE-SWITCHING:DAN217.80V,100mA,SOT-23, | | RR58 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | |
| RD6 | 0407-000114 | DIODE-ARRAY:DAN202K.80V,100mA,CA2-3,SOT- | | RR59 | 2007-000082 | R-CHIP:3.3Kohm,5%,1/16W,DA,TP,1608 | |
| RE11 | 2401-000913 | C-AL:22uF,20%,16V,GP,TP,5x11mm,2.5m | | RR6 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | |
| RE12 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | | RR62 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | |
| RE13 | 2401-000414 | C-AL:10uF,20%,16V,GP,TP,4x7,5 | | RR65 | 2007-000082 | R-CHIP:3.3Kohm,5%,1/16W,DA,TP,1608 | |
| RE14 | 2401-000913 | C-AL:22uF,20%,16V,GP,TP,5x11mm,2.5m | | RR68 | 2007-000130 | R-CHIP:39Kohm,5%,1/16W,DA,TP,1608 | |
| RE17 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | | RR69 | 2007-000091 | R-CHIP:12Kohm,5%,1/16W,DA,TP,1608 | |
| RE2 | 2401-000414 | C-AL:10uF,20%,16V,GP,TP,4x7,5 | | RR7 | 2007-000072 | R-CHIP:47ohm,5%,1/16W,DA,TP,1608 | |
| RE8 | 2401-000414 | C-AL:10uF,20%,16V,GP,TP,4x7,5 | | RR70 | 2007-000134 | R-CHIP:33Kohm,5%,1/16W,DA,TP,1608 | |
| RE9 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | | RR72 | 2007-000103 | R-CHIP:120Kohm,5%,1/16W,DA,TP,1608 | |
| RIC1 | AH13-10030Y | IC ASIC:-,KS1461,VQFP,100pin,RF IC | | RR8 | 2007-000077 | R-CHIP:470ohm,5%,1/16W,DA,TP,1608 | |
| RIC3 | 1202-000121 | IC-VOLTAGE COMP.:2903,SOP,8P,150MIL,DUAL | | RR80 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| RL2 | 2703-000398 | INDUCTOR-SMD:10uH,10%,3.2x2.5x2.2mm | | RR81 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| RL3 | 3301-000353 | CORE-FERRITE BEAD:AB,2.0x1.25x0.9mm,-,- | | RR82 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| RL4 | 3301-000353 | CORE-FERRITE BEAD:AB,2.0x1.25x0.9mm,-,- | | RR83 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| RL5 | 2703-000398 | INDUCTOR-SMD:10uH,10%,3.2x2.5x2.2mm | | RR85 | 2007-000108 | R-CHIP:510Kohm,5%,1/16W,DA,TP,1608 | |
| RQ1 | 0501-000279 | TR-SMALL SIGNAL:KSA1182-Y,PNP,150mW,SOT- | | RR86 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | |
| RQ2 | 0504-000128 | TR-DIGITAL: -,NPN,200mW,22K/22K,SOT-23,TP | | RR87 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | |
| RQ3 | 0501-000279 | TR-SMALL SIGNAL:KSA1182-Y,PNP,150mW,SOT- | | RR9 | 2007-000312 | R-CHIP:100HM,5%,1/8W,DA,TP,3216 | |
| RR1 | 2007-000091 | R-CHIP:12Kohm,5%,1/16W,DA,TP,1608 | | SC1 | 2203-000257 | C-CERAMIC,CHIP;10nf,10%,50V,X7R,TP,1608 | |
| RR10 | 2007-001179 | R-CHIP:8.2Kohm,5%,1/16W,DA,TP,1608 | | SC10 | 2203-001222 | C-CERAMIC,CHIP;820pF,10%,50V,X7R,TP,1608 | |
| RR11 | 2007-000512 | R-CHIP:2.4Kohm,5%,1/16W,DA,TP,1608 | | SC11 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR12 | 2007-000093 | R-CHIP:20Kohm,5%,1/16W,DA,TP,1608 | | SC14 | 2203-000491 | C-CERAMIC,CHIP;2.2nf,10%,50V,X7R,TP,1608 | |
| RR13 | 2007-001179 | R-CHIP:8.2Kohm,5%,1/16W,DA,TP,1608 | | SC15 | 2203-001052 | C-CERAMIC,CHIP;0.56nF,10%,50V,X7R,TP,1608 | |
| RR14 | 2007-000091 | R-CHIP:12Kohm,5%,1/16W,DA,TP,1608 | | SC16 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR15 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | | SC17 | 2203-000560 | C-CERAMIC,CHIP;220nf,+80-20%,25V,Y5V,TP, | |
| RR16 | 2007-000704 | R-CHIP:3.6Kohm,5%,1/16W,DA,TP,1608 | | SC18 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR17 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | | SC19 | 2203-000140 | C-CERAMIC,CHIP;1.5nf,10%,50V,X7R,TP,1608 | |
| RR18 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC2 | 2203-001573 | C-CERAMIC,CHIP;0.012nf,5%,50V,NP0,TP,160 | |
| RR19 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC26 | 2203-002398 | C-CERAMIC,CHIP;22nf,10%,50V,X7R,TP,1608 | |
| RR2 | 2007-000091 | R-CHIP:12Kohm,5%,1/16W,DA,TP,1608 | | SC29 | 2203-000372 | C-CERAMIC,CHIP;15nf,10%,50V,X7R,TP,1608 | |
| RR20 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | | SC3 | 2203-001573 | C-CERAMIC,CHIP;0.012nf,5%,50V,NP0,TP,160 | |
| RR21 | 2007-000704 | R-CHIP:3.6Kohm,5%,1/16W,DA,TP,1608 | | SC30 | 2203-000372 | C-CERAMIC,CHIP;15nf,10%,50V,X7R,TP,1608 | |
| RR22 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC31 | 2203-000491 | C-CERAMIC,CHIP;2.2nf,10%,50V,X7R,TP,1608 | |
| RR23 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC32 | 2203-000491 | C-CERAMIC,CHIP;2.2nf,10%,50V,X7R,TP,1608 | |
| RR24 | 2007-000078 | R-CHIP:1Kohm,5%,1/16W,DA,TP,1608 | | SC33 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR25 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | | SC36 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR28 | 2007-000078 | R-CHIP:1Kohm,5%,1/16W,DA,TP,1608 | | SC38 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR29 | 2007-000078 | R-CHIP:1Kohm,5%,1/16W,DA,TP,1608 | | SC40 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR3 | 2007-000091 | R-CHIP:12Kohm,5%,1/16W,DA,TP,1608 | | SC41 | 2203-000560 | C-CERAMIC,CHIP;220nf,+80-20%,25V,Y5V,TP, | |
| RR30 | 2007-000091 | R-CHIP:12Kohm,5%,1/16W,DA,TP,1608 | | SC44 | 2203-002398 | C-CERAMIC,CHIP;22nf,10%,50V,X7R,TP,1608 | |
| RR31 | 2007-001179 | R-CHIP:8.2Kohm,5%,1/16W,DA,TP,1608 | | SC49 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR32 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC50 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR33 | 2007-000082 | R-CHIP:3.3Kohm,5%,1/16W,DA,TP,1608 | | SC51 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR34 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | SC52 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR35 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | | SC53 | 2203-000257 | C-CERAMIC,CHIP;10nf,10%,50V,X7R,TP,1608 | |
| RR36 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC55 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR37 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC57 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR38 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC58 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR39 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | SC59 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR4 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | SC6 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR40 | 2007-000655 | R-CHIP:27Kohm,5%,1/16W,DA,TP,1608 | | SC60 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR41 | 2007-000708 | R-CHIP:3.9Kohm,1%,1/16W,DA,TP,1608 | | SC61 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR43 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | SC62 | 2203-005148 | C-CERAMIC,CHIP;100nf,10%,16V,X7R,TP,1608 | |
| RR44 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | SC64 | 2203-000626 | C-CERAMIC,CHIP;0.022nf,5%,50V,NP0,TP,160 | |

| Loc.No | Part No | Description : Specification | Remark | Loc.No | Part No | Description : Specification | Remark |
|--------|-------------|---|--------|--------|-------------|--|--------|
| SC65 | 2203-000626 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,160 | | SR70 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | |
| SC66 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | | SR71 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | |
| SC68 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | | SR73 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | |
| SC7 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | | SR74 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | |
| SC9 | 2203-000560 | C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP, | | SR75 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | |
| SD2 | 0407-000114 | DIODE-ARRAY:DAN202K,80V,100mA,CA2-3,SOT- | | SR76 | 2007-000616 | R-CHIP:24Kohm,5%,1/16W,DA,TP,1608 | |
| SD3 | 0407-000114 | DIODE-ARRAY:DAN202K,80V,100mA,CA2-3,SOT- | | SR77 | 2007-001179 | R-CHIP:8.2Kohm,5%,1/16W,DA,TP,1608 | |
| SE1 | 2401-002165 | C-AL:100uF,20%,16V,GP,TP,6.3x7.5 | | SR80 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| SE2 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11.5 | | SR81 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| SE3 | 2401-002165 | C-AL:100uF,20%,16V,GP,TP,6.3x7.5 | | SR82 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| SE5 | 2401-000913 | C-AL:22uF,20%,16V,GP,TP,5x11mm,2.5m | | SR83 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| SE53 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11.5 | | SR84 | 2007-000070 | R-CHIP:0ohm,5%,1/16W,DA,TP,1608 | |
| SE54 | 2401-002075 | C-AL:4.7uF,20%,50V,GP,TP,5x11.5 | | SR85 | 2007-000074 | R-CHIP:100ohm,5%,1/16W,DA,TP,1608 | |
| SE55 | 2401-002075 | C-AL:4.7uF,20%,50V,GP,TP,5x11.5 | | SR9 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | |
| SE56 | 2401-002075 | C-AL:4.7uF,20%,50V,GP,TP,5x11.5 | | SY1 | 2801-000261 | CRYSTAL-UNIT:33.8688MHz,50ppm,28-AA,12P | |
| SE63 | 2401-000414 | C-AL:10uF,20%,16V,GP,TP,4x7.5 | | ZC1 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SIC1 | AH13-10030N | IC-ASIC:-,KS1452,QFP,80P,DSSIC | | ZC10 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SIC3 | 0801-002097 | IC-CMOS LOGIC:7SET08,AND GATE,SOP,P,110 | | ZC11 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SIC4 | 1003-001298 | IC-MOTOR DRIVER:KA3017,HQFP48P,550MIL,1 | | ZC12 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SIC8 | AH14-10004T | IC-ANALOG MUXPLEXER:MC14053BD,SOT,TAPE 16 | | ZC13 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SL2 | 3301-000353 | CORE-FERRITE BEAD:AB,2.0x1.25x0.9mm,-,- | | ZC14 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SL4 | 3301-000353 | CORE-FERRITE BEAD:AB,2.0x1.25x0.9mm,-,- | | ZC15 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SQ1 | 0504-000128 | TR-DIGITAL:-,NPN,200mW,22K/22K,SOT-23,TP | | ZC16 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SQ2 | 0504-000156 | TR-DIGITAL:DTA124EKA,PNP,200mW,22K-22K | | ZC17 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR1 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | ZC18 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR10 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | | ZC19 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR11 | 2007-000107 | R-CHIP:470Kohm,5%,1/16W,DA,TP,1608 | | ZC2 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR12 | 2007-001235 | R-CHIP:910Kohm,5%,1/16W,DA,TP,1608 | | ZC29 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| SR14 | 2007-000450 | R-CHIP:180ohm,5%,1/16W,DA,TP,1608 | | ZC3 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR15 | 2007-000102 | R-CHIP:100Kohm,5%,1/16W,DA,TP,1608 | | ZC37 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| SR16 | 2007-000131 | R-CHIP:91Kohm,5%,1/16W,DA,TP,1608 | | ZC38 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR17 | 2007-000081 | R-CHIP:2.7Kohm,5%,1/16W,DA,TP,1608 | | ZC39 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR18 | 2007-000093 | R-CHIP:20Kohm,5%,1/16W,DA,TP,1608 | | ZC4 | 2203-000626 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,160 | |
| SR19 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | | ZC40 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR2 | 2007-000109 | R-CHIP:1Mohm,5%,1/16W,DA,TP,1608 | | ZC41 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR20 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | | ZC42 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR21 | 2007-000070 | R-CHIP:0ohm,5%,1/16W,DA,TP,1608 | | ZC43 | 2203-001652 | C-CERAMIC,CHIP:470nF,+80-20%,16V,Y5V,TP | |
| SR22 | 2007-000070 | R-CHIP:0ohm,5%,1/16W,DA,TP,1608 | | ZC44 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR23 | 2007-000130 | R-CHIP:39Kohm,5%,1/16W,DA,TP,1608 | | ZC45 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR24 | 2007-000070 | R-CHIP:0ohm,5%,1/16W,DA,TP,1608 | | ZC46 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR26 | 2007-000091 | R-CHIP:12Kohm,5%,1/16W,DA,TP,1608 | | ZC47 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR3 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | ZC48 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR32 | 2007-000080 | R-CHIP:2Kohm,5%,1/16W,DA,TP,1608 | | ZC49 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR33 | 2007-000080 | R-CHIP:2Kohm,5%,1/16W,DA,TP,1608 | | ZC5 | 2203-000626 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,160 | |
| SR34 | 2007-000124 | R-CHIP:2.2Kohm,5%,1/16W,DA,TP,1608 | | ZC50 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR35 | 2007-000124 | R-CHIP:2.2Kohm,5%,1/16W,DA,TP,1608 | | ZC51 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR36 | 2007-000124 | R-CHIP:2.2Kohm,5%,1/16W,DA,TP,1608 | | ZC58 | 2203-000440 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,1608,- | |
| SR37 | 2007-000124 | R-CHIP:2.2Kohm,5%,1/16W,DA,TP,1608 | | ZC59 | 2203-005148 | C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,1608 | |
| SR38 | 2007-000092 | R-CHIP:15Kohm,5%,1/16W,DA,TP,1608 | | ZC6 | 2203-000626 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,160 | |
| SR39 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | ZC60 | 2203-000681 | C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,160 | |
| SR4 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | ZC61 | 2007-000070 | R-CHIP:0ohm,5%,1/16W,DA,TP,1608 | |
| SR40 | 2007-000101 | R-CHIP:82Kohm,5%,1/16W,DA,TP,1608 | | ZC62 | 2203-000681 | C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,160 | |
| SR41 | 2007-000084 | R-CHIP:4.7Kohm,5%,1/16W,DA,TP,1608 | | ZC63 | 2203-000626 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,160 | |
| SR42 | 2007-000090 | R-CHIP:10Kohm,5%,1/16W,DA,TP,1608 | | ZC65 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR43 | 2007-000106 | R-CHIP:220Kohm,5%,1/16W,DA,TP,1608 | | ZC66 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR44 | 2007-000098 | R-CHIP:56Kohm,5%,1/16W,DA,TP,1608 | | ZC67 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR45 | 2007-000655 | R-CHIP:27Kohm,5%,1/16W,DA,TP,1608 | | ZC68 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR47 | 2007-000070 | R-CHIP:0ohm,5%,1/16W,DA,TP,1608 | | ZC69 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR5 | 2007-001179 | R-CHIP:8.2Kohm,5%,1/16W,DA,TP,1608 | | ZC7 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR52 | 2007-000704 | R-CHIP:3.6Kohm,5%,1/16W,DA,TP,1608 | | ZC70 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR53 | 2007-000123 | R-CHIP:1.5Kohm,5%,1/16W,DA,TP,1608 | | ZC71 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR6 | 2007-000098 | R-CHIP:56Kohm,5%,1/16W,DA,TP,1608 | | ZC72 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR60 | 2007-000097 | R-CHIP:47Kohm,5%,1/16W,DA,TP,1608 | | ZC73 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR67 | 2007-000034 | R-CHIP:10OHM,5%,1/8W,DA,TP,3216 | | ZC74 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR68 | 2007-000034 | R-CHIP:10OHM,5%,1/8W,DA,TP,3216 | | ZC75 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |
| SR7 | 2007-000799 | R-CHIP:360ohm,5%,1/16W,DA,TP,1608 | | ZC76 | 2203-000257 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,1608 | |

| Loc.No | Part No | Description ; Specification | Remark | Loc.No | Part No | Description ; Specification | Remark |
|--------|-------------|--|--------|--------|-------------|--|--------------|
| ZC77 | 2203-000426 | C-CERAMIC,CHIP;0.018nF,5%,50V,NP0,TP,160 | | 602 | AH92-00338D | ASSY PCB-JACK;DVD-611,JACK PCB | DVD-611 |
| ZC78 | 2203-000626 | C-CERAMIC,CHIP;0.022nF,5%,50V,NP0,TP,160 | | | AH92-00338E | ASSY PCB-JACK;DVD-511,JACK PCB | DVD-511 |
| ZC8 | 2203-000257 | C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608 | | AC10 | 2203-000192 | C-CERAMIC,CHIP;100nF,+80-20%,50V,Y5V,TP, | |
| ZC9 | 2203-000257 | C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608 | | AC11 | 2301-000423 | C-FILM,PEF;3.3NF,5%,100V,TP,7X10X4.5MM,5 | |
| ZE30 | 2401-000414 | C-AL;10uF,20%,16V,GP,TP,4x7,5 | | AC13 | 2301-000423 | C-FILM,PEF;3.3NF,5%,100V,TP,7X10X4.5MM,5 | |
| ZE34 | 2401-000414 | C-AL;10uF,20%,16V,GP,TP,4x7,5 | | AC14 | 2301-000402 | C-FILM,PEF;1nF,5%,50V,TP,5x7x2.8mm,5mm | |
| ZE35 | 2401-002144 | C-AL;47uF,20%,16V,GP,TP,5x11,5 | | AC15 | 2301-000402 | C-FILM,PEF;1nF,5%,50V,TP,5x7x2.8mm,5mm | |
| ZE36 | 2401-000414 | C-AL;10uF,20%,16V,GP,TP,4x7,5 | | AC201 | 2203-000192 | C-CERAMIC,CHIP;100nF,+80-20%,50V,Y5V,TP, | DVD-611 ONLY |
| ZE37 | 2401-000414 | C-AL;10uF,20%,16V,GP,TP,4x7,5 | | AC202 | 2203-000260 | C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012 | |
| ZIC1 | 1204-001673 | IC-DECODER,ZIVA4.1,QFP,208P,1100MIL,PLAS | | AC203 | 2203-000260 | C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012 | |
| ZIC2 | 1105-001268 | IC-DRAM;3617161,16BIT,TSOP50P,-,7NS,3 | | AC4 | 2202-002037 | C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V | |
| ZIC3 | 1105-001268 | IC-DRAM;3617161,16BIT,TSOP50P,-,7NS,3 | | AC5 | 2202-002037 | C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V | |
| ZIC4 | AH14-10004R | IC;M74HCU04,SOP,TAPE 14P | | AC6 | 2202-002037 | C-CERAMIC,MLC-AXIAL;100nF,80-20%,50V,Y5V | |
| ZIC5 | 0402-000309 | DIODE-RECTIFIER;1SR154-400,400V,1A,PSM | | AC7 | 2301-000402 | C-FILM,PEF;1nF,5%,50V,TP,5x7x2.8mm,5mm | |
| ZL10 | 2703-000398 | INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm | | AC8 | 2301-000402 | C-FILM,PEF;1nF,5%,50V,TP,5x7x2.8mm,5mm | |
| ZL11 | 3301-000353 | CORE-FERRITE BEAD;AB,2.0x1.25x0.9mm,-,- | | AC9 | 2203-000192 | C-CERAMIC,CHIP;100nF,+80-20%,50V,Y5V,TP, | |
| ZL12 | 2703-000398 | INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm | | AD51 | 0407-000114 | DIODE-ARRAY:DAN202K,80V,100mA,CA2-3,SOT- | |
| ZL2 | 3301-000353 | CORE-FERRITE BEAD;AB,2.0x1.25x0.9mm,-,- | | AD54 | 0401-000101 | DIODE-SWITCHING;1N4148,100V,200mA,DO-35, | |
| ZL6 | 3301-000353 | CORE-FERRITE BEAD;AB,2.0x1.25x0.9mm,-,- | | AD55 | 0401-000101 | DIODE-SWITCHING;1N4148,100V,200mA,DO-35, | |
| ZL7 | 3301-000353 | CORE-FERRITE BEAD;AB,2.0x1.25x0.9mm,-,- | | AD60 | 0407-000116 | DIODE-ARRAY:DAP202K,80V,100mA,CK2-3,SOT- | |
| ZL9 | 3301-000353 | CORE-FERRITE BEAD;AB,2.0x1.25x0.9mm,-,- | | AE1 | 2401-002042 | C-AL;220uF,20%,10V,GP,TP,6.3x11,5 | |
| ZR1 | 2007-001164 | R-CHIP;75ohm,1%,1/16W,DA,TP,1608 | | AE17 | 2401-000598 | C-AL;1uF,20%,50V,GP,TP,4x7,5 | |
| ZR16 | 2007-000074 | R-CHIP;100ohm,5%,1/16W,DA,TP,1608 | | AE2 | 2401-002042 | C-AL;220uF,20%,10V,GP,TP,6.3x11,5 | |
| ZR17 | 2007-000074 | R-CHIP;100ohm,5%,1/16W,DA,TP,1608 | | AE21 | 2401-002144 | C-AL;47uF,20%,16V,GP,TP,5x11,5 | |
| ZR18 | 2007-000074 | R-CHIP;100ohm,5%,1/16W,DA,TP,1608 | | AE22 | 2401-002144 | C-AL;47uF,20%,16V,GP,TP,5x11,5 | |
| ZR23 | 2007-000078 | R-CHIP;1Kohm,5%,1/16W,DA,TP,1608 | | AE3 | 2401-002042 | C-AL;220uF,20%,10V,GP,TP,6.3x11,5 | |
| ZR27 | 2007-000084 | R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608 | | AE51 | 2401-001969 | C-AL;470uF,20%,25V,GP,TP,10x12.5,5 | |
| ZR28 | 2007-000084 | R-CHIP;4.7Kohm,5%,1/16W,DA,TP,1608 | | AE52 | 2401-000302 | C-AL;100uF,20%,25V,GP,TP,6.3x11,5 | |
| ZR29 | 2007-000078 | R-CHIP;1Kohm,5%,1/16W,DA,TP,1608 | | AE6 | 2401-000414 | C-AL;10uF,20%,16V,GP,TP,4x7,5 | |
| ZR30 | 2011-000475 | R-NETWORK;33ohm,5%,63mW,L,CHIP8P,TP | | AE9 | 2401-000414 | C-AL;10uF,20%,16V,GP,TP,4x7,5 | |
| ZR31 | 2011-000475 | R-NETWORK;33ohm,5%,63mW,L,CHIP8P,TP | | AIC1 | 1002-001213 | IC-D/A CONVERTER;AK4393VF,24BIT,SOP28P | |
| ZR32 | 2011-000475 | R-NETWORK;33ohm,5%,63mW,L,CHIP8P,TP | | AIC3 | AH14-10004R | IC;M74HCU04,SOP,TAPE 14P | |
| ZR33 | 2011-000475 | R-NETWORK;33ohm,5%,63mW,L,CHIP8P,TP | | AL1 | 3301-000353 | CORE-FERRITE BEAD;AB,2.0x1.25x0.9mm,-,- | |
| ZR34 | 2007-000113 | R-CHIP;33ohm,5%,1/16W,DA,TP,1608 | | AL2 | 3301-000353 | CORE-FERRITE BEAD;AB,2.0x1.25x0.9mm,-,- | |
| ZR35 | 2007-000070 | R-CHIP;0ohm,5%,1/16W,DA,TP,1608 | | AL201 | 2901-001125 | FILTER-EMI ON BOARD;50V,0.5A,-,220pF,7x7 | DVD-611 ONLY |
| ZR37 | 2007-000113 | R-CHIP;33ohm,5%,1/16W,DA,TP,1608 | | AOP1 | 1201-000163 | IC-OP AMP;4560,SOP8P,173MIL,DUAL,100V/m | |
| ZR38 | 2007-000074 | R-CHIP;100ohm,5%,1/16W,DA,TP,1608 | | AQ1 | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200mV,SOT- | |
| ZR68 | 2007-000078 | R-CHIP;1Kohm,5%,1/16W,DA,TP,1608 | | AQ3 | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200mV,SOT- | |
| ZR69 | 2007-000070 | R-CHIP;0ohm,5%,1/16W,DA,TP,1608 | | AQ51 | 0504-000128 | TR-DIGITAL;-,NPN,200MW,22K/22K,SOT-23,TP | |
| ZR70 | 2007-000070 | R-CHIP;0ohm,5%,1/16W,DA,TP,1608 | | AQ52 | 0504-000156 | TR-DIGITAL-DTA124EKA,PNP,200mW,22K-22K | |
| ZR71 | 2007-000070 | R-CHIP;0ohm,5%,1/16W,DA,TP,1608 | | AQ55 | 0504-000118 | TR-DIGITAL-KSR1003,NPN,300MW,22K/22K,TO- | |
| ZR72 | 2011-000816 | R-NETWORK;100ohm,5%,63mW,L,CHIP8P,TP | | AQ56 | 0504-000118 | TR-DIGITAL-KSR1003,NPN,300MW,22K/22K,TO- | |
| ZR73 | 2007-000078 | R-CHIP;1Kohm,5%,1/16W,DA,TP,1608 | | AQ57 | 0504-001003 | TR-DIGITAL-KSR2003,PNP,300MW,22K/22K,TO- | |
| ZR75 | 2007-001164 | R-CHIP;75ohm,1%,1/16W,DA,TP,1608 | | AR10 | 2007-00267 | R-CHIP;1.8KOHM,5%,1/10W,DA,TP,2012 | |
| ZR76 | 2007-001164 | R-CHIP;75ohm,1%,1/16W,DA,TP,1608 | | AR11 | 2001-00258 | R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ZR77 | 2007-001164 | R-CHIP;75ohm,1%,1/16W,DA,TP,1608 | | AR14 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| ZR78 | 2007-001164 | R-CHIP;75ohm,1%,1/16W,DA,TP,1608 | | AR15 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| ZR79 | 2007-007332 | R-CHIP;1.18KOHM,1%,1/10W,DA,TP,2012 | | AR16 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| ZR82 | 2007-000799 | R-CHIP;360ohm,5%,1/16W,DA,TP,1608 | | AR17 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| ZR84 | 2007-000078 | R-CHIP;1Kohm,5%,1/16W,DA,TP,1608 | | AR18 | 2007-000221 | R-CHIP;1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ZR86 | 2007-000078 | R-CHIP;1Kohm,5%,1/16W,DA,TP,1608 | | AR19 | 2007-000221 | R-CHIP;1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ZR88 | 2007-000078 | R-CHIP;1Kohm,5%,1/16W,DA,TP,1608 | | AR2 | 2001-000258 | R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ZR89 | 2007-000109 | R-CHIP;1Mohm,5%,1/16W,DA,TP,1608 | | AR201 | 2007-000766 | R-CHIP;330OHM,5%,1/10W,DA,TP,2012 | DVD-611 ONLY |
| ZR90 | 2007-000070 | R-CHIP;0ohm,5%,1/16W,DA,TP,1608 | | AR202 | 2007-001247 | R-CHIP;910HM,5%,1/10W,DA,TP,2012 | DVD-611 ONLY |
| ZR91 | 2007-000074 | R-CHIP;100ohm,5%,1/16W,DA,TP,1608 | | AR203 | 2001-000515 | R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ZR92 | 2007-000074 | R-CHIP;100ohm,5%,1/16W,DA,TP,1608 | | AR21 | 2001-000290 | R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ZR93 | 2007-000074 | R-CHIP;100ohm,5%,1/16W,DA,TP,1608 | | AR22 | 2001-000515 | R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ZY1 | 2801-003554 | CRYSTAL-UNIT;27MHz,10ppm,28-AAM,12pF,400 | | AR24 | 2001-000515 | R-CARBON;2200HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| | | | | AR26 | 2001-000429 | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| | | | | AR28 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| | | | | AR29 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| | | | | AR3 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| | | | | AR30 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| | | | | AR31 | 2007-000468 | R-CHIP;1KOHM,5%,1/10W,DA,TP,2012 | |
| | | | | AR32 | 2007-000221 | R-CHIP;1.2KOHM,5%,1/10W,DA,TP,2012 | |

| Loc.No | Part No | Description ; Specification | Remark | Loc.No | Part No | Description ; Specification | Remark |
|--------|-------------|--|--------------|--------|-------------|--|--------------|
| AR33 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | | FR32 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| AR35 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | FR33 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AR36 | 2001-000515 | R-CARBON:2200HM,5%,1/8W,AA,TP,1.8X3.2MM | | FR34 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AR38 | 2001-000515 | R-CARBON:2200HM,5%,1/8W,AA,TP,1.8X3.2MM | | FR35 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AR4 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | FR36 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AR40 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | FR37 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AR5 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | FR3S | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| AR51 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | FR43 | 2001-000793 | R-CARBON:470HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| AR54 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM | | FR44 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| AR55 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M | | FR45 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| AR56 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM | | FR46 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AR6 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | FR4S | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| AR7 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | FR5 | 2001-000325 | R-CARBON:1200HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| AR8 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | FR51 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| AR9 | 2007-000267 | R-CHIP:1.8KOHM,5%,1/10W,DA,TP,2012 | | FR52 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| AVJ1 | 3722-001469 | JACK-RCA:3P/4P,3.2mm,NI,BLK,- | DVD-611 ONLY | FR53 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AVJ2 | 3722-001467 | JACK-RCA:3P,3.2mm,NI,BLK,- | | FR54 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AVJ4 | 3722-001053 | JACK-RCA:1P,3.2mm,NI,BLK,- | DVD-611 ONLY | FR57 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-511 ONLY |
| AVJ5 | 3707-001005 | CONNECTOR-OPTICAL:PLUG,SM,-,4.4/2.0MM | | FR6 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| AZD51 | 0403-000551 | DIODE-ZENER:MTZ3.9B,3.9V,3.89-4.16V,500m | | FR7 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| CN1 | 3708-001364 | CONNECTOR-FPC/FC/PIC:35P,1.25MM,STRAIGHT | | FR8 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| CN3 | AH39-00179A | CONNECT WIRE:-,,-,#26,-,-,-,-,1 | | FY1 | 2802-000108 | RESONATOR-CERAMIC:12MHZ,0.5%,BK,10.0X5.0 | |
| FC10 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | JP347 | 2008-000141 | R-FUSIBLE:2.2ohm,5%,1/4W,AA,TP,2.6x6.7mm | DVD-511 ONLY |
| FC14 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | JP383 | 2001-000780 | R-CARBON:4700HM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-511 ONLY |
| FC15 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | JP58 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| FC16 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | JP80 | 2007-000033 | R-CHIP:0OHM,5%,1/8W,DA,TP,3216 | |
| FC2 | 2202-000162 | C-CERAMIC,MLC-AXIAL:,015NF,5%,50V,SL,TP, | | JP81 | 2007-000033 | R-CHIP:0OHM,5%,1/8W,DA,TP,3216 | |
| FC3 | 2202-000162 | C-CERAMIC,MLC-AXIAL:,015NF,5%,50V,SL,TP, | | PBR11 | 3301-000297 | CORE-FERRITE BEAD:AA,3.6x1.2x5.7mm,1400, | |
| FC4 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | PBS01 | 3301-000297 | CORE-FERRITE BEAD:AA,3.6x1.2x5.7mm,1400, | |
| FC6 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | PCD02 | 2201-000934 | C-CERAMIC,DISC:3.3nf,20%,400V,Y5U,TP,15x | △ |
| FC7 | 2202-002037 | C-CERAMIC,MLC-AXIAL:100nf,80-20%,50V,V5V | | PCD03 | 2201-000934 | C-CERAMIC,DISC:3.3nf,20%,400V,Y5U,TP,15x | △ |
| FD10 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | | PDC12 | 2201-000930 | C-CERAMIC,DISC:0.22nf,10%,500V,Y5P,TP5. | |
| FD6 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | | PCNS1 | AH39-00177A | CONNECT WIRE:-,,-,#24,-,-,-,-,1 | |
| FD7 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | | PCNS2 | 3711-000178 | CONNECTOR-HEADER:1WALL,2P,1R,3.96mm,STRA | △ |
| FD8 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | | PCR01 | 2201-000795 | C-CERAMIC,DISC:10nf,10%,400V,Y5P,TP,15x1 | △ |
| FD9 | 0403-000551 | DIODE-ZENER:MTZ3.9B,3.9V,3.89-4.16V,500m | | PCR02 | 2201-000934 | C-CERAMIC,DISC:3.3nf,20%,400V,Y5U,TP,15x | △ |
| FE1 | 2401-000922 | C-AL:22uf,20%,16V,GP,TP,5x5.5 | | PCR11 | 2201-000930 | C-CERAMIC,DISC:0.22nf,10%,500V,Y5P,TP5. | |
| FE12 | 2401-001475 | C-AL:47uf,20%,10V,GP,TP,6.3x5.5mm | | PCR13 | 2301-000176 | C-FILM,PEF:18nf,5%,100V,TP,10X9X4.3X5.5m | |
| FE5 | 2401-002144 | C-AL:47uf,20%,16V,GP,TP,5x11.5 | | PCR14 | 2301-000417 | C-FILM,PEF:24nf,5%,50V,TP,6.5x10.5x4mm,5 | |
| FE8 | 2401-001507 | C-AL:47uf,20%,16V,GP,TP,6.3x5.5 | | PCR15 | 2301-000423 | C-FILM,PEF:3.3nf,5%,100V,TP,7X10X4.5MM,5 | |
| FIC1 | AH09-00034A | IC: MICOM:LC866232A,SANYO,100PIN, QFPQFP | | PCS03 | 2201-000916 | C-CERAMIC,DISC:100pf,10%,400V,Y5U,TP,10x | |
| FIC2 | 1203-001252 | IC-VOL. DETECTOR:7545,T0-92,3P, PLASTIC | | PCS31 | 2301-000381 | C-FILM,PEF:10nf,5%,50V,TP,6.5x5.5x3mm,5m | |
| FIC4 | AH59-00010A | MODULE-REMOCN:,-,37.9KHZ,940NM,,-,- | | PCS32 | 2203-000192 | C-CERAMIC,CHIP:100nf,+80-20%,50V,Y5V,TP, | |
| FL2 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | | PDD35 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | |
| FR1 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PDR11 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | |
| FR10 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM | | PDR12 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | |
| FR101 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PDS01 | 0402-001196 | DIODE-RECTIFIER:1T5,600V,1A,TS-1,TP | |
| FR102 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PDS02 | 0402-001196 | DIODE-RECTIFIER:1T5,600V,1A,TS-1,TP | |
| FR103 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PDS03 | 0402-001196 | DIODE-RECTIFIER:1T5,600V,1A,TS-1,TP | |
| FR104 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PDS04 | 0402-001196 | DIODE-RECTIFIER:1T5,600V,1A,TS-1,TP | |
| FR105 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PDS11 | 0402-002276 | DIODE-RECTIFIER:UF4007,1KV,1A,DO-41,TP | |
| FR106 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PDS31 | 0402-001195 | DIODE-RECTIFIER:FT1T4,400V,1.0A,TS-1,TP | |
| FR11 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM | | PDS32 | 0402-001194 | DIODE-RECTIFIER:UG2D,200V,2A,DO-204AC,TP | |
| FR12 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM | | PDS33 | 0404-001097 | DIODE-SCHOTTKY:SG45,45V,750mA,TO-220A,B | |
| FR13 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM | | PDS34 | 0404-001097 | DIODE-SCHOTTKY:SG45,45V,750mA,TO-220A,B | |
| FR16 | 2001-000027 | R-CARBON:1000HM,5%,1/4W,AA,TP,2.4X6.4MM | | PDS36 | 0402-001195 | DIODE-RECTIFIER:FT1T4,400V,1.0A,TS-1,TP | |
| FR17 | 2001-000027 | R-CARBON:1000HM,5%,1/4W,AA,TP,2.4X6.4MM | | PDS51 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | |
| FR18 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | | PDS52 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| FR19 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PER10 | 2401-003365 | C-AL:150uF,20%,200V,GP,TP,18x25,7.5 | △ |
| FR20 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PER11 | 2401-001235 | C-AL:4.7uF,20%,250V,WT,TP,10x12.5,5 | |
| FR21 | 2001-000435 | R-CARBON:1MOHM,5%,1/8W,AA,TP,1.8X3.2MM | | PER12 | 2401-000905 | C-AL:22uF,20%,16V,BP,-6X11.2,5MM | |
| FR24 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM | | PES31 | 2401-000302 | C-AL:100uF,20%,25V,GP,TP,6.3x11,5 | |
| FR25 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | | PES32 | 2401-000302 | C-AL:100uF,20%,25V,GP,TP,6.3x11,5 | |
| FR26 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP,1.8X3.2MM | | PES33 | 2401-000118 | C-AL:1000uF,20%,10V,GP,TP,10x12.5,5 | |
| FR28 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | | PES34 | 2401-000118 | C-AL:1000uF,20%,10V,GP,TP,10x12.5,5 | |
| FR31 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | | PES35 | 2401-003046 | C-AL:47uF,20%,50V,WT,TP,6.3x11,2,5 | |


Electrical Parts List

| Loc.No | Part No | Description ; Specification | Remark | Loc.No | Part No | Description ; Specification | Remark |
|--------|-------------|--|--------|--------|-------------|--|--------------|
| PES36 | 2401-001353 | C-AL:470uF,20%,10V,GP,TP,8x11.5,5 | | VC9 | 2202-000231 | C-CERAMIC,MLC-AXIAL:330pF,10%,50V,Y5P,TP | |
| PES37 | 2401-002042 | C-AL:220uF,20%,10V,GP,TP,6.3x11.5 | | VE1 | 2401-000369 | C-AL:100uF,20%,6.3V,GP,-,6.3X11.5 | DVD-611 ONLY |
| PES51 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11.5 | | VE10 | 2401-000369 | C-AL:100uF,20%,6.3V,GP,-,6.3X11.5 | DVD-611 ONLY |
| PES52 | 2401-000598 | C-AL:1uF,20%,50V,GP,TP,4x7.5 | | VE11 | 2401-000913 | C-AL:22uF,20%,16V,GP,TP,5x11mm,2.5m | DVD-611 ONLY |
| PES53 | 2401-000302 | C-AL:100uF,20%,25V,GP,TP,6.3x11.5 | | VE2 | 2401-000913 | C-AL:22uF,20%,16V,GP,TP,5x11mm,2.5m | DVD-611 ONLY |
| PES54 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11.5 | | VE3 | 2401-000369 | C-AL:100uF,20%,6.3V,GP,-,6.3X11.5 | DVD-611 ONLY |
| PES56 | 2401-000302 | C-AL:100uF,20%,25V,GP,TP,6.3x11.5 | | VE4 | 2401-000913 | C-AL:22uF,20%,16V,GP,TP,5x11mm,2.5m | DVD-611 ONLY |
| PES57 | 2401-000302 | C-AL:100uF,20%,25V,GP,TP,6.3x11.5 | | VE5 | 2401-001353 | C-AL:470uF,20%,10V,GP,TP,8x11.5,5 | |
| PES58 | 2401-001353 | C-AL:470uF,20%,10V,GP,TP,8x11.5,5 | | VE6 | 2401-000913 | C-AL:22uF,20%,16V,GP,TP,5x11mm,2.5m | |
| PFD01 | 3601-000194 | FUSE-CARTRIDGE:250V,1A,FAST-ACTING,GLASS | △ | VE7 | 2401-001353 | C-AL:470uF,20%,10V,GP,TP,8x11.5,5 | |
| PICS1 | 0604-000186 | PHOTO-COUPLER:TR,-,200mW,DIP-4,ST | △ | VE8 | 2401-000913 | C-AL:22uF,20%,16V,GP,TP,5x11mm,2.5m | |
| PICS2 | AC14-12006D | IC:KA431Z,TO-92,TAPING | | VE9 | 2401-002042 | C-AL:220uF,20%,10V,GP,TP,6.3x11.5 | |
| PICS3 | 1203-000122 | IC-NEGA,FIXED REG.:7908,TO-220,3P,-,PLAS | | VFD1 | AH07-00024A | VF DISPLAY:HNV-11SS19,21SEG,74X9.0mm,DVD | |
| PICS4 | 1203-001697 | IC-VOLTAGE REGULATOR:78R08,TO-220,4P,-P | | VIC1 | 1201-001419 | IC-VIDEO AMP:7660,SSOP,16P,173MIL,3,6DB, | |
| PICS5 | 1203-001083 | IC-VOLTAGE REGULATOR:3RF23,TO-202,4P,12. | | VIC2 | 1201-001419 | IC-VIDEO AMP:7660,SSOP,16P,173MIL,3,6DB, | DVD-611 ONLY |
| PLS01 | AC29-30050C | FILTER-LINE NOISE:-,25MH,0.35A,AC250V,BS | △ | VL1 | 2701-000238 | INDUCTOR-AXIAL:1.8uH,10%,2.5x3.4mm | |
| PLS31 | AC27-12001N | COIL-CHOKE:10UH-15%,RA,K-30,Q80,150KHZ,- | | VL112 | 3301-000353 | CORE-FERRITE BEAD:AB,2.0x1.25x0.9mm,-,- | |
| POWER | 0601-001447 | LED:ROUND,RED,3.1mm,650nm | | VL2 | 2701-000238 | INDUCTOR-AXIAL:1.8uH,10%,2.5x3.4mm | |
| PQR11 | 0502-000405 | TR-POWER:-,NPN,70W,TO-220,BK,10 | △ | VL3 | 2701-000238 | INDUCTOR-AXIAL:1.8uH,10%,2.5x3.4mm | |
| PQR12 | 0501-000442 | TR-SMALL SIGNAL:KTC3203-Y,NPN,400MW,TO-9 | | VL4 | 2701-000238 | INDUCTOR-AXIAL:1.8uH,10%,2.5x3.4mm | |
| POS55 | 0504-000152 | TR-DIGITAL:KS2R101,PNP,200MW,4.7K/4.7K,S | | VL5 | 2701-000238 | INDUCTOR-AXIAL:1.8uH,10%,2.5x3.4mm | DVD-611 ONLY |
| POS56 | 0504-000128 | TR-DIGITAL:-,NPN,200MW,22K/22K,SOT-23,TP | | VL6 | 2701-000145 | INDUCTOR-AXIAL:1uH,5%,2.4x3.4mm | DVD-611 ONLY |
| POS57 | 0501-000616 | TR-SMALL SIGNAL:KSC2328A-Y,NPN,1W,TO-92L | | VL7 | 2701-000238 | INDUCTOR-AXIAL:1.8uH,10%,2.5x3.4mm | |
| POS58 | 0501-000616 | TR-SMALL SIGNAL:KSC2328A-Y,NPN,1W,TO-92L | | VL8 | 2701-000145 | INDUCTOR-AXIAL:1uH,5%,2.4x3.4mm | |
| PRD11 | 2003-000119 | R-METAL OXIDE:0.68ohm,5%,2W,AE,TP,6x16mm | | VR10 | 2001-000969 | R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| PRD31 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | | VR10S | 2001-001006 | R-CARBON:820HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| PRD32 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP,2012 | | VR11 | 2001-000969 | R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| PRR11 | 2003-002117 | R-METAL OXIDE(S):330Kohm,5%,1W,AA,TP,3.3 | | VR12 | 2001-000969 | R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| PRR12 | 2003-000314 | R-METAL OXIDE:47ohm,5%,2W,AE,TP,6x16mm | | VR121 | 2001-000515 | R-CARBON:2200HM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-611 ONLY |
| PRR13 | 2003-000314 | R-METAL OXIDE:47ohm,5%,2W,AE,TP,6x16mm | | VR122 | 2007-000572 | R-CHIP:2200HM,5%,1/10W,DA,TP,2012 | |
| PRR14 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP,1.8x3.2mm | | VR123 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-611 ONLY |
| PRR15 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP,1.8x3.2mm | | VR13 | 2001-000969 | R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-611 ONLY |
| PRR17 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | VR22 | 2001-000969 | R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-611 ONLY |
| PRS11 | 2003-000994 | R-METAL OXIDE(S):33Kohm,5%,2W,AF,TP,3.9x | | VR23 | 2001-000969 | R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-611 ONLY |
| PRS12 | 2003-000994 | R-METAL OXIDE(S):33Kohm,5%,2W,AF,TP,3.9x | | VR24 | 2001-000969 | R-CARBON:750HM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-611 ONLY |
| PRS31 | 2001-000440 | R-CARBON:10OHM,5%,1/8W,AA,TP,1.8X3.2MM | | VR7 | 2001-001006 | R-CARBON:820HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| PRS32 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | VR8 | 2001-001006 | R-CARBON:820HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| PRS33 | 2004-000869 | R-METAL:3Kohm,1%,1/8W,AA,TP,1.8x3.2mm | | VR9 | 2001-001006 | R-CARBON:820HM,5%,1/8W,AA,TP,1.8X3.2MM | DVD-611 ONLY |
| PRS34 | 2004-000459 | R-METAL:2.2Kohm,1%,1/8W,AA,TP,1.8x3.2mm | | VSW1 | AH34-00010A | SWITCH SLIDE:-,50V DC,-,-,100MOHM,-,-, | DVD-611 ONLY |
| PRS54 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | | | | |
| PRS55 | 2001-000062 | R-CARBON:470OHM,5%,1/4W,AA,TP,2.4X6.4MM | | | | | |
| PRS56 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | | | | |
| PTD1 | AC26-00001N | TRANS-SWITCHING:-,-,120V,UL/CSA,EE2821 | △ | | | | |
| PVA1 | 1405-000186 | VARISTOR:470V,4500A,17x12mm,TP | △ | | | | |
| PZR31 | 0403-001036 | DIODE-ZENER:1N4745A,16V,5%,1W,DO-41,TP | | | | | |
| PZS51 | 0403-000717 | DIODE-ZENER:MTZJ5.1B,5.1V,4.94-5.2V,500m | | | | | |
| SVJ1 | 3722-001375 | JACK-DIN:4P,-,NI,BLK,- | | | | | |
| SW1 | 3404-000160 | SWITCH-TACT:12V,50mA,160gf+50gf,6.55x7. | | | | | |
| VC1 | 2202-000205 | C-CERAMIC,MLC-AXIAL:22pf,5%,50V,SL,TP,1. | | | | | |
| VC10 | 2202-000791 | C-CERAMIC,MLC-AXIAL:150pF,10%,50V,Y5P,TP | | | | | |
| VC106 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | | | | | |
| VC11 | 2202-000851 | C-CERAMIC,MLC-AXIAL:270pF,10%,50V,Y5P,TP | | | | | |
| VC12 | 2202-000231 | C-CERAMIC,MLC-AXIAL:330pF,10%,50V,Y5P,TP | | | | | |
| VC13 | 2202-000791 | C-CERAMIC,MLC-AXIAL:150pF,10%,50V,Y5P,TP | | | | | |
| VC14 | 2202-000205 | C-CERAMIC,MLC-AXIAL:22pf,5%,50V,SL,TP,1. | | | | | |
| VC16 | 2202-002037 | C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5V | | | | | |
| VC17 | 2203-000192 | C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP, | | | | | |
| VC18 | 2202-000231 | C-CERAMIC,MLC-AXIAL:330pF,10%,50V,Y5P,TP | | | | | |
| VC19 | 2202-000791 | C-CERAMIC,MLC-AXIAL:150pF,10%,50V,Y5P,TP | | | | | |
| VC21 | 2202-000205 | C-CERAMIC,MLC-AXIAL:22pF,5%,50V,SL,TP,1. | | | | | |
| VC22 | 2202-000851 | C-CERAMIC,MLC-AXIAL:270pF,10%,50V,Y5P,TP | | | | | |
| VC3 | 2202-000851 | C-CERAMIC,MLC-AXIAL:270pF,10%,50V,Y5P,TP | | | | | |
| VC4 | 2202-000231 | C-CERAMIC,MLC-AXIAL:330pF,10%,50V,Y5P,TP | | | | | |
| VC5 | 2202-000791 | C-CERAMIC,MLC-AXIAL:150pF,10%,50V,Y5P,TP | | | | | |
| VC6 | 2202-000205 | C-CERAMIC,MLC-AXIAL:22pF,5%,50V,SL,TP,1. | | | | | |
| VC8 | 2202-000851 | C-CERAMIC,MLC-AXIAL:270pF,10%,50V,Y5P,TP | | | | | |

| Loc.No | Part No | Description ; Specification | Remark | Loc.No | Part No | Description ; Specification | Remark |
|--------|-------------|--|---------|--------|---------|-----------------------------|--------|
| 701 | AH92-00583A | ASSY PCB-KEY;DVD-611,KEY PCB | DVD-611 | | | | |
| | AH92-00582A | ASSY PCB-KEY;DVD-511,KEY PCB | DVD-511 | | | | |
| CON21 | AH39-00180A | CONNECT WIRE:...#26,...,1 | | | | | |
| FSW1 | 3404-000165 | SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST | | | | | |
| FSW2 | 3404-000165 | SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST | | | | | |
| FSW4 | 3404-000165 | SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST | | | | | |
| FSW5 | 3404-000165 | SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST | | | | | |
| FSW6 | 3404-000165 | SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST | | | | | |
| H240 | AH92-00608A | ASSY PCB-DECK;VALINO DECK 1L | | | | | |
| CN1 | 3708-001084 | CONNECTOR-FPC/FC/PIC:40P1.25mm,ANGLE,SN | | | | | |
| CN2 | 3708-001494 | CONNECTOR-FPC/FC/PIC:20P,1mm,SMD-A,SN | | | | | |
| CN2A | 3809-001182 | CABLE-FLAT:30V,80C,114mm,20P,1mm,UL20696 | | | | | |
| CN3 | 3708-001492 | CONNECTOR-FPC/FC/PIC:11P,1mm,ANGLE,SN | | | | | |
| DC1 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | | | | |
| DC2 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | | | | |
| DC4 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | | | | |
| DC5 | 2202-000797 | C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP, | | | | | |
| DD2 | 0401-000101 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | | | | | |
| DR1 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | | | | |
| DR4 | 2001-000405 | R-CARBON:1800HM,5%,1/8W,AA,TP,1.8X3.2MM | | | | | |
| DR5 | 2001-000405 | R-CARBON:1800HM,5%,1/8W,AA,TP,1.8X3.2MM | | | | | |
| DR6 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | | | | |
| DR7 | 2001-000515 | R-CARBON:2200HM,5%,1/8W,AA,TP,1.8X3.2MM | | | | | |
| SW1 | 3409-001045 | SWITCH-DETECTOR:30V,0.1A,1,36gf,- | | | | | |
| SW2 | 3409-000176 | SWITCH-DETECTOR:30Vdc,100mA,SPST,- | | | | | |
| SW3 | 3408-000227 | SWITCH-SLIDE:30V,300mA,DPDT,- | | | | | |

MEMO

9. Block Diagram

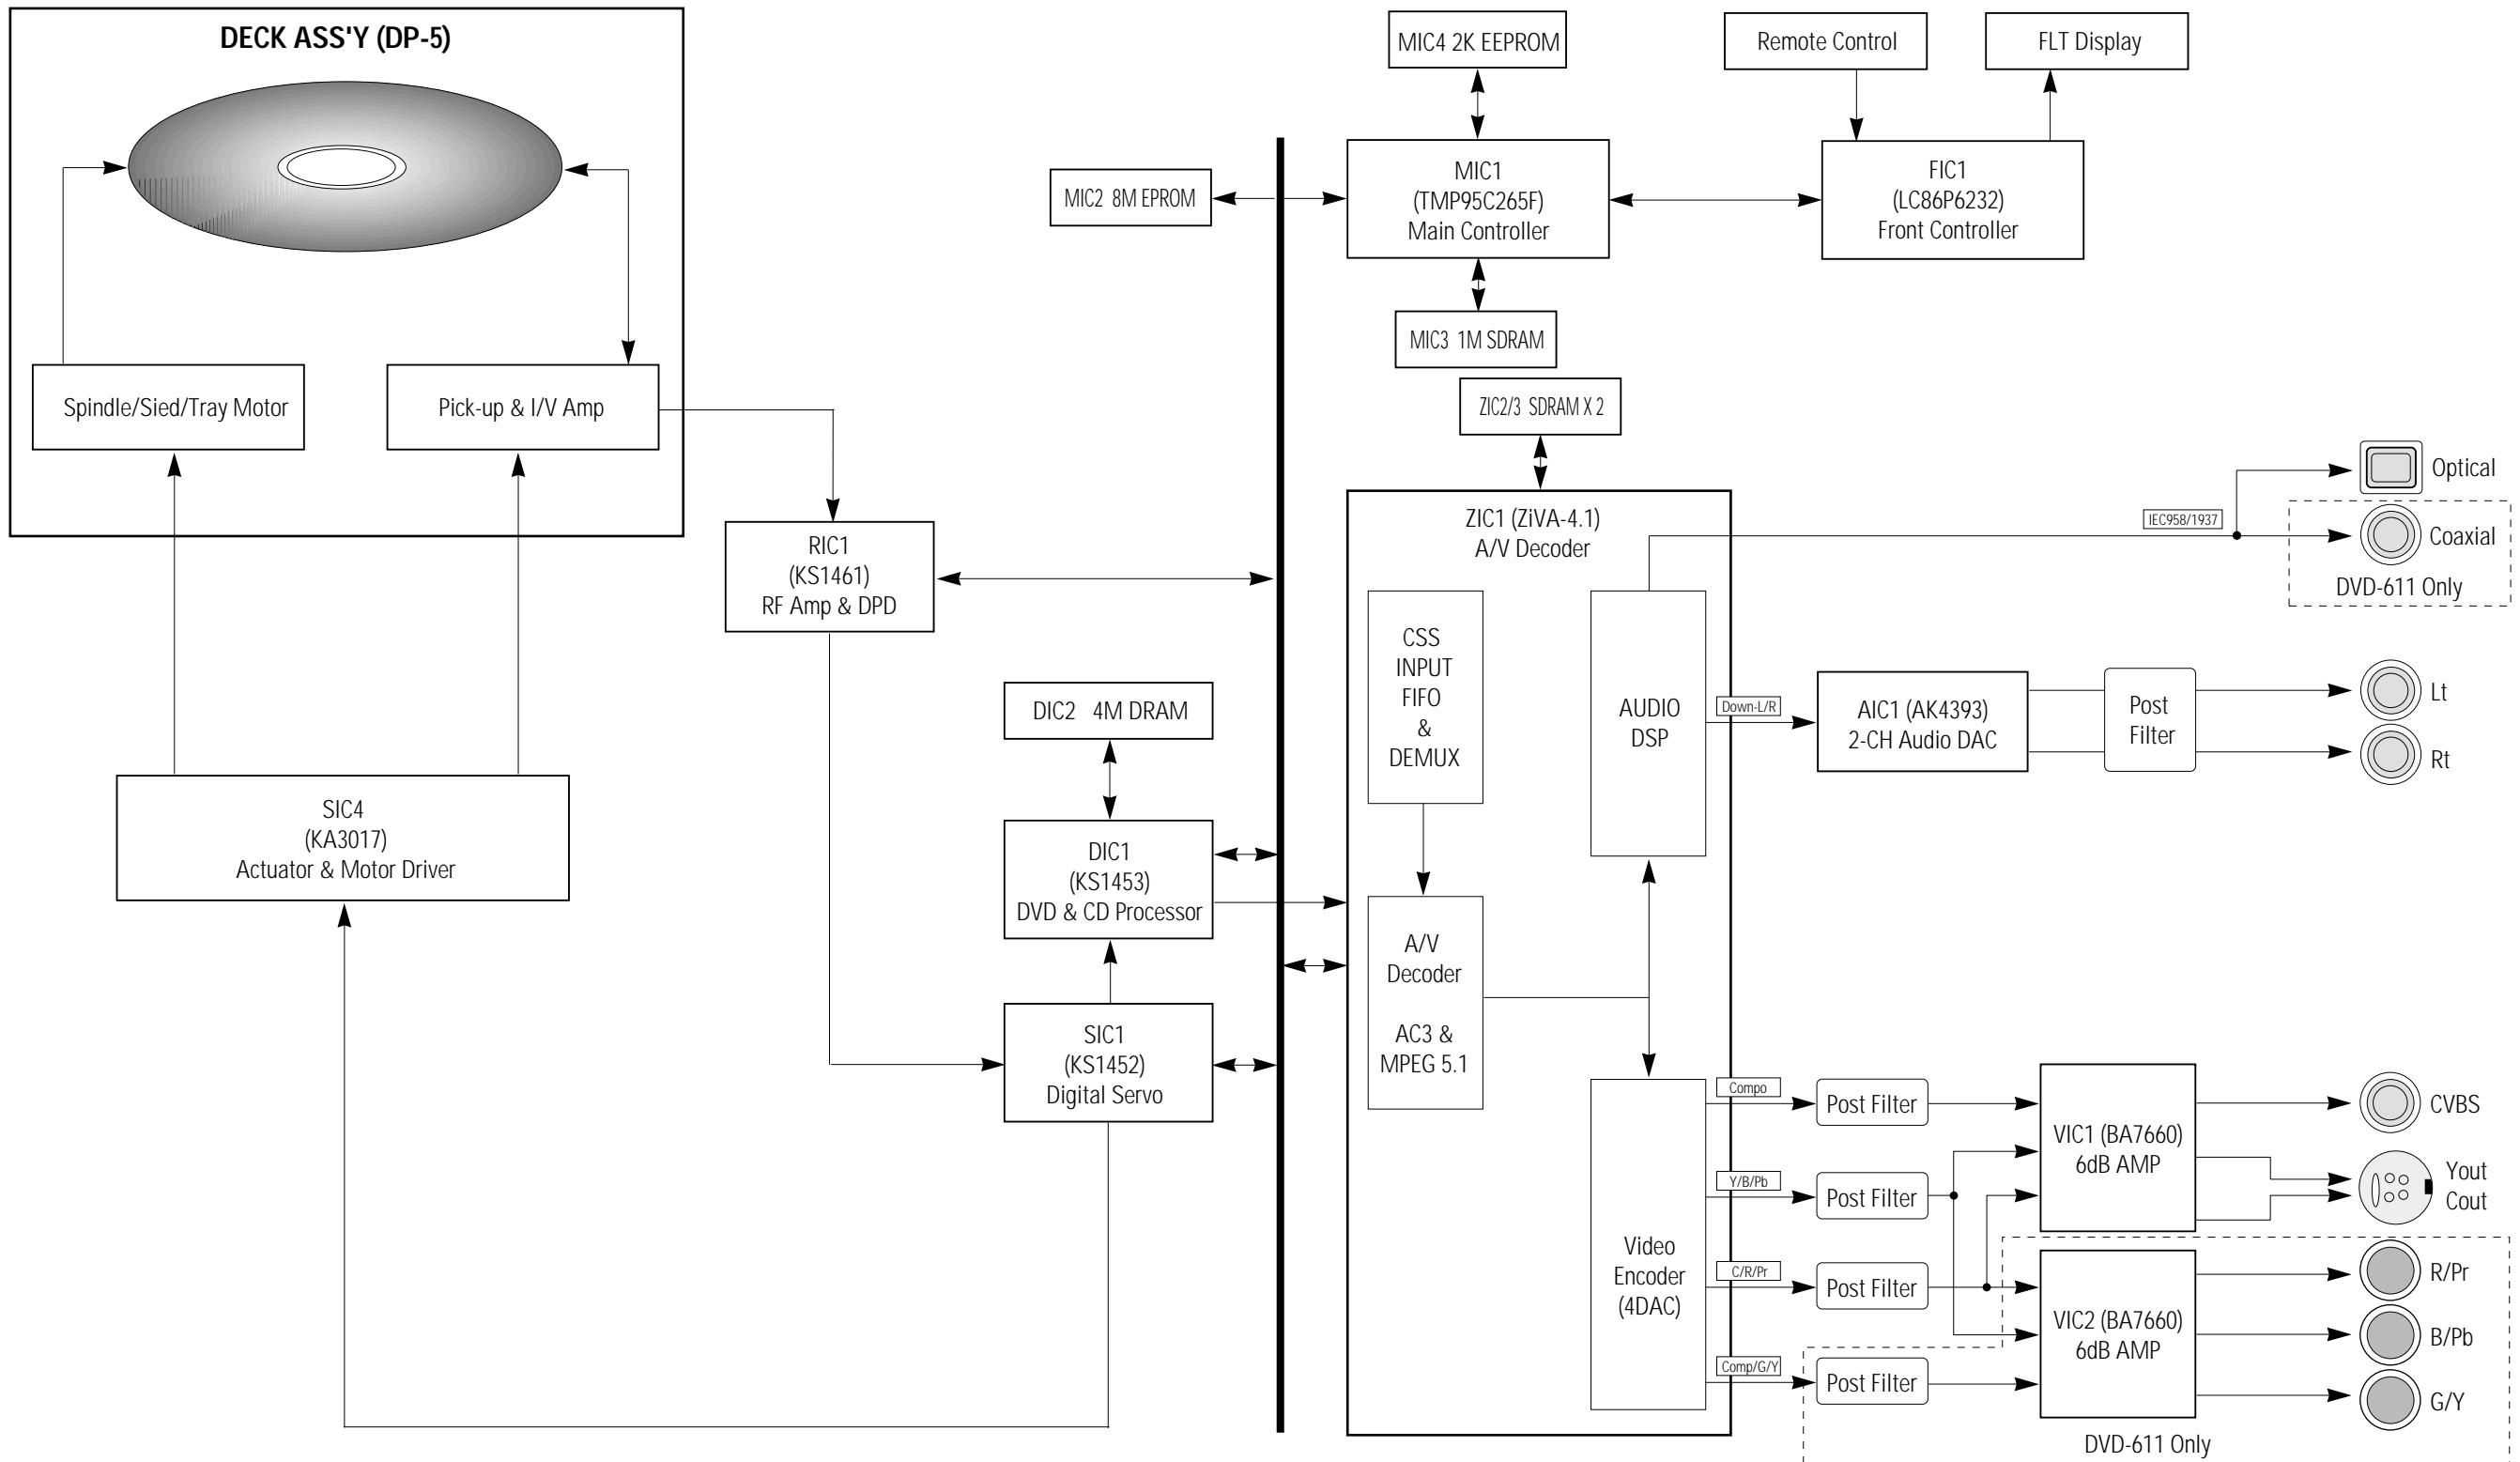


MEMO


10. PCB Diagrams




| | |
|-----------------|------|
| 10-1 Main ----- | 10-2 |
| 10-2 Jack ----- | 10-3 |
| 10-3 Key ----- | 10-4 |
| 10-4 Deck ----- | 10-4 |

10-1 Main

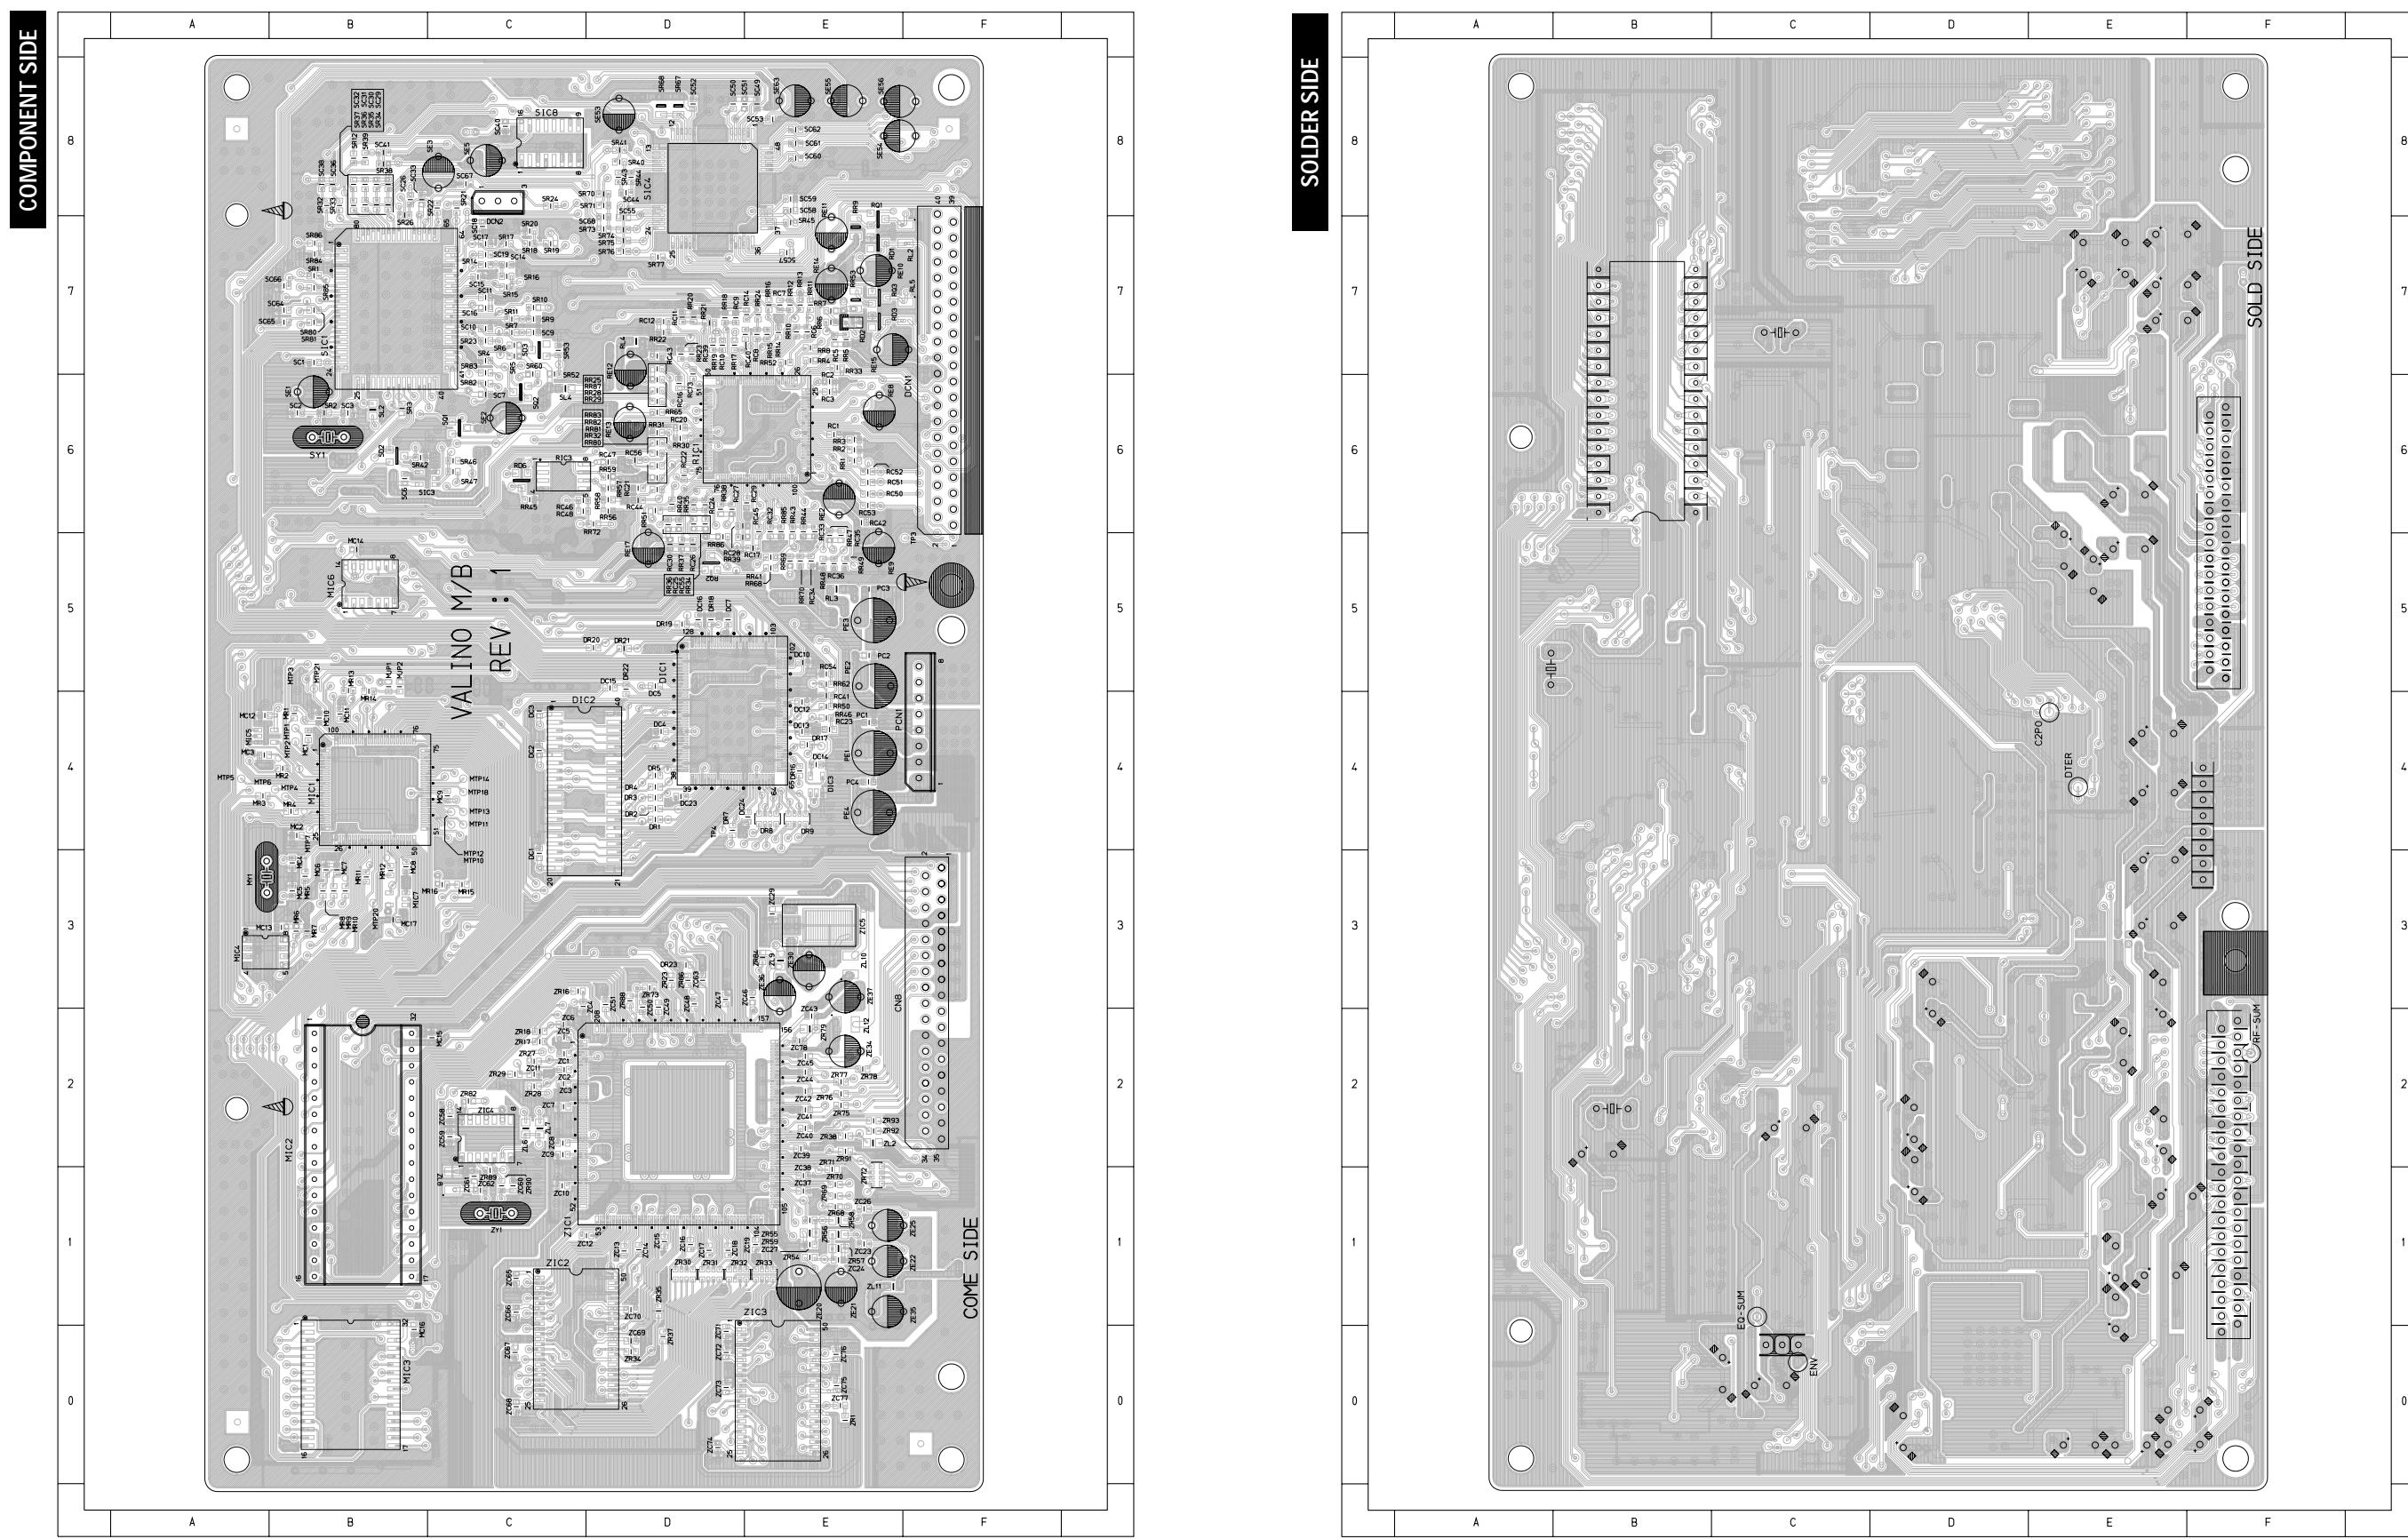


10-2 Jack

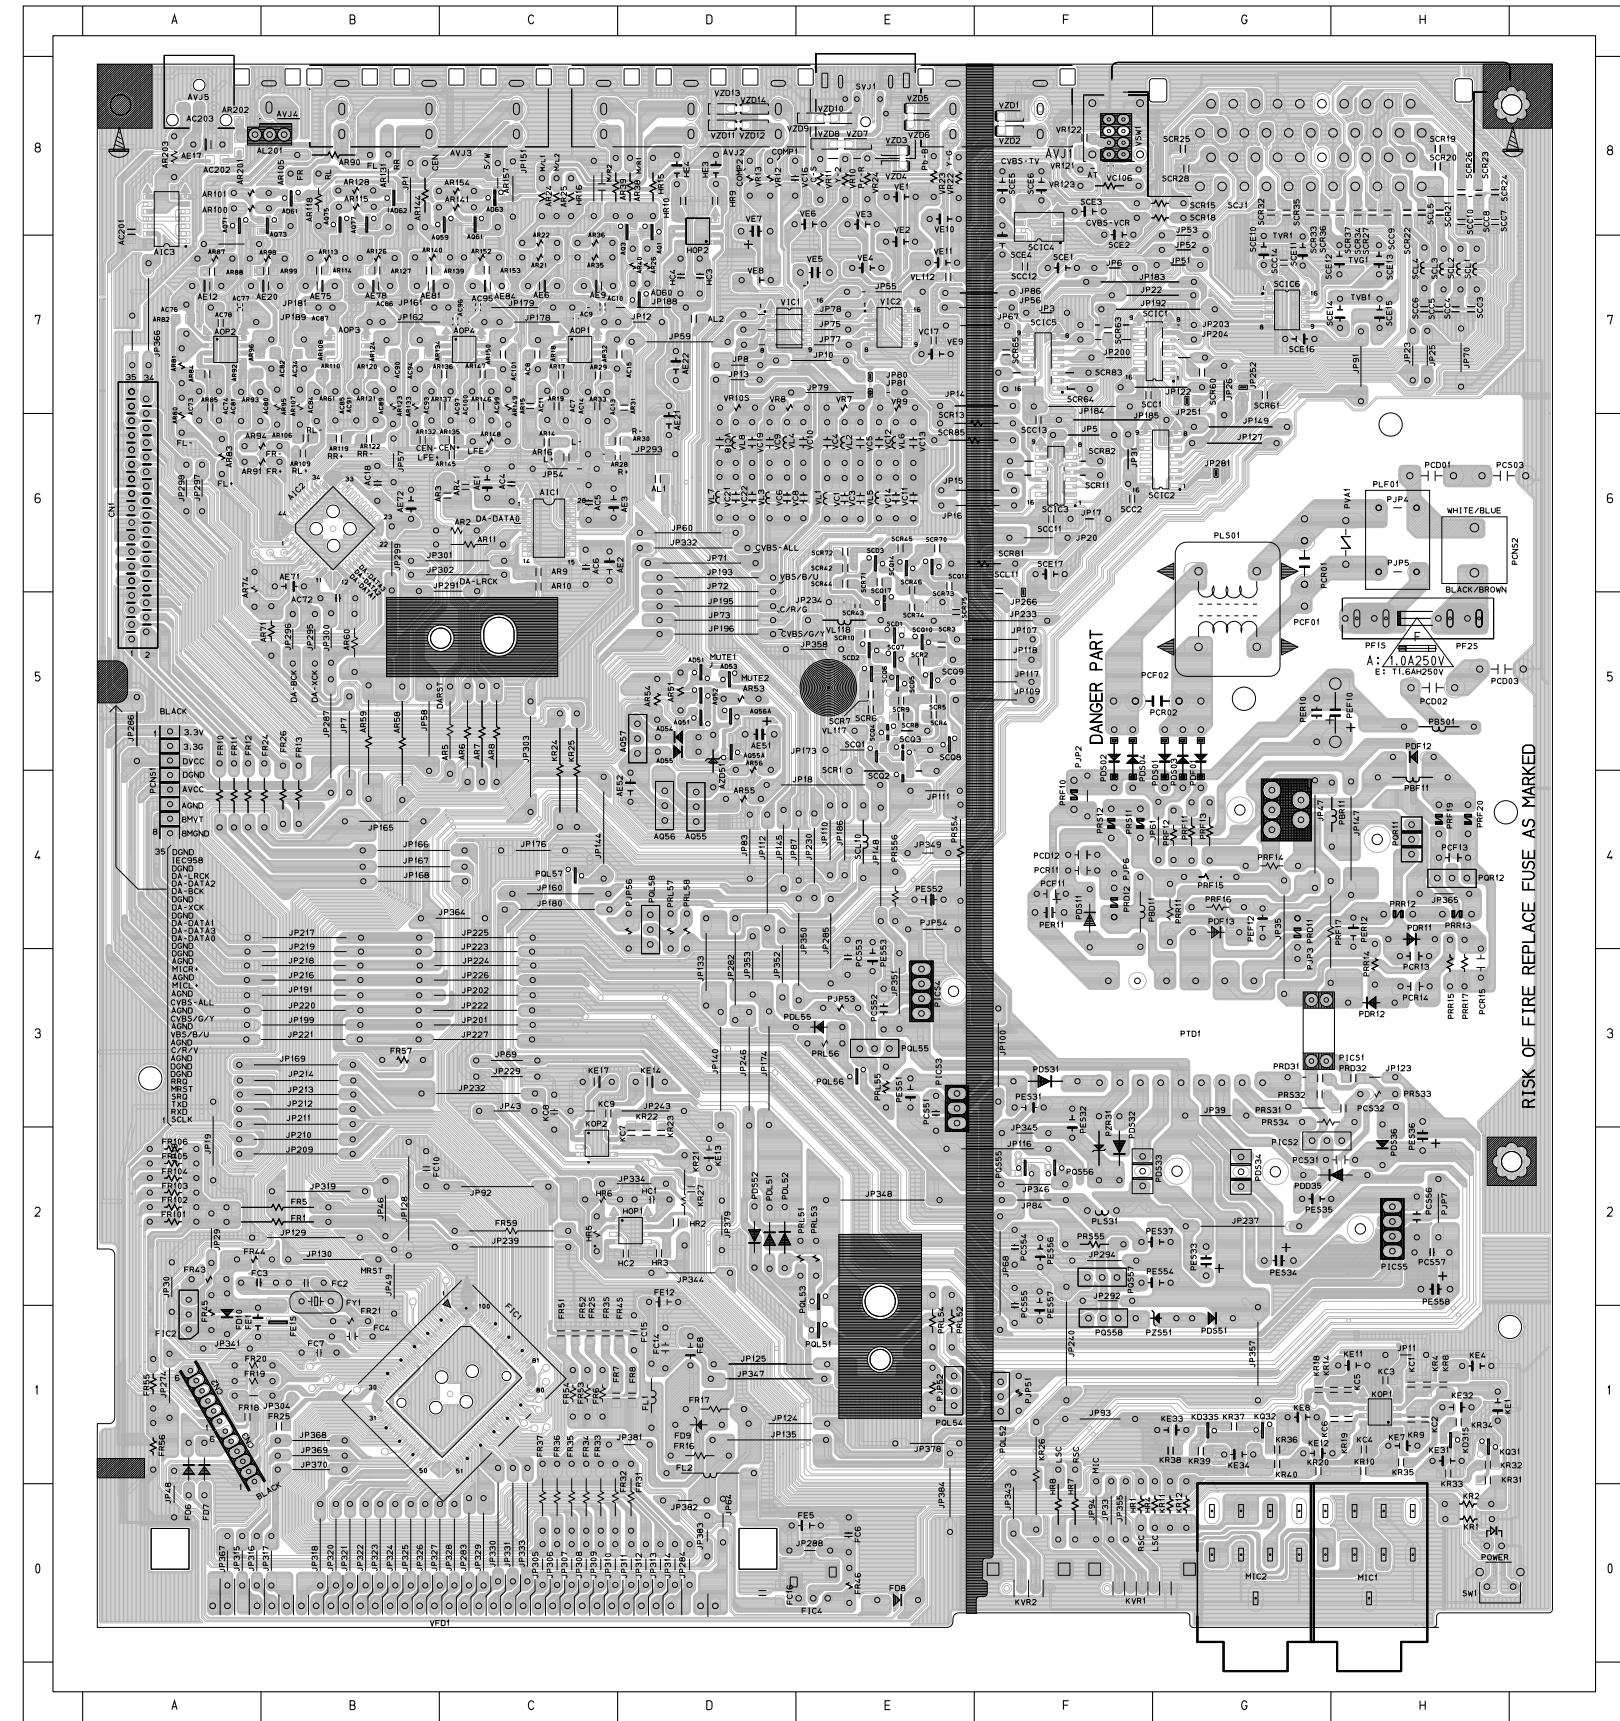

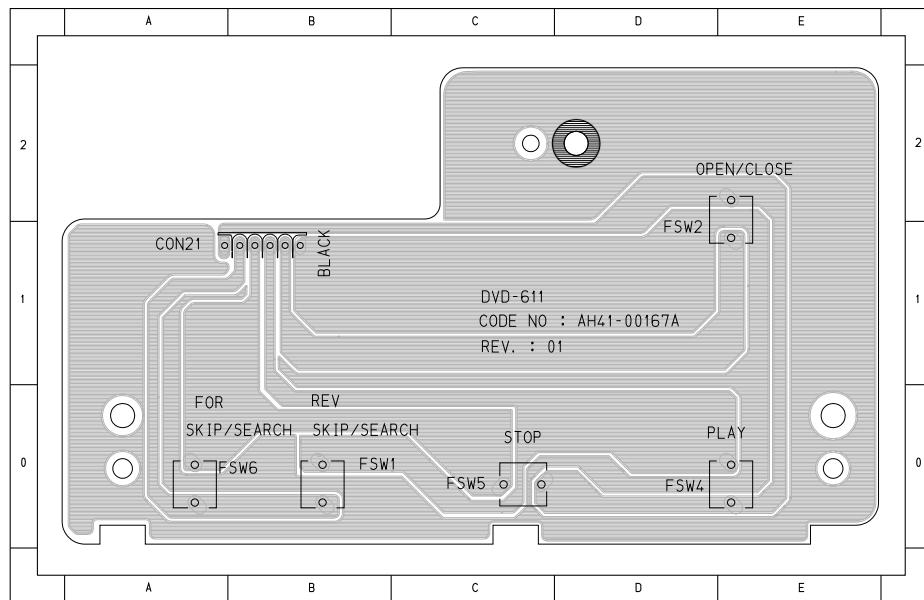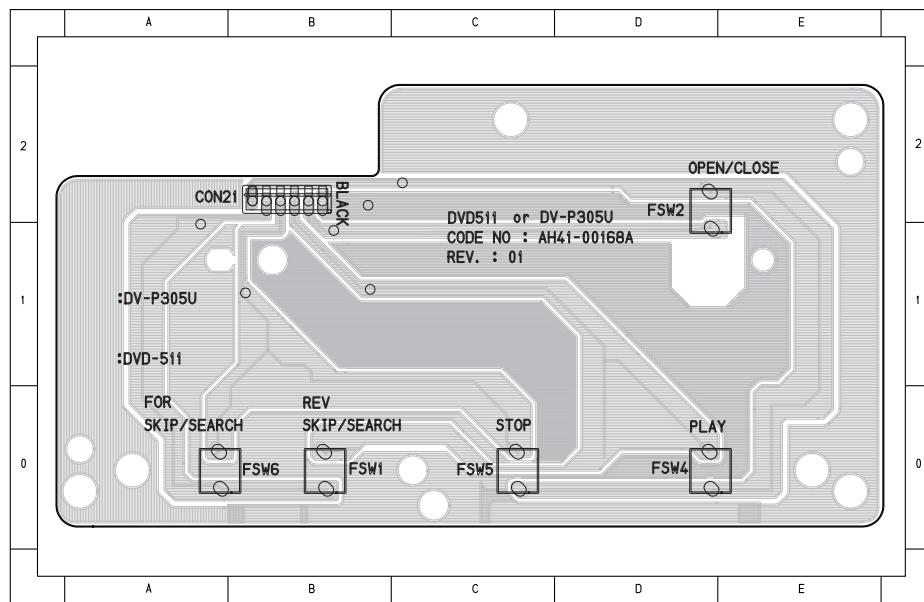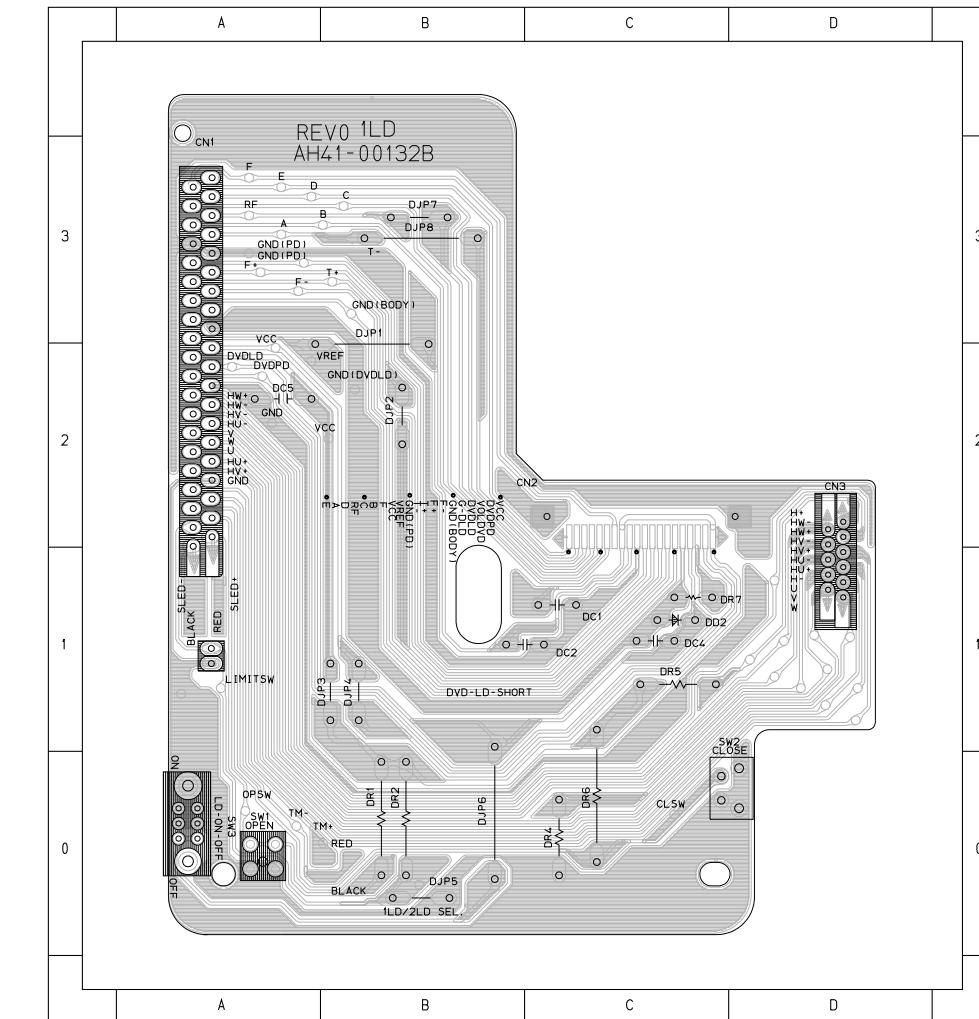10-3 Key**DVD-611****DVD-511****10-4 Deck**

11. Wiring Diagram

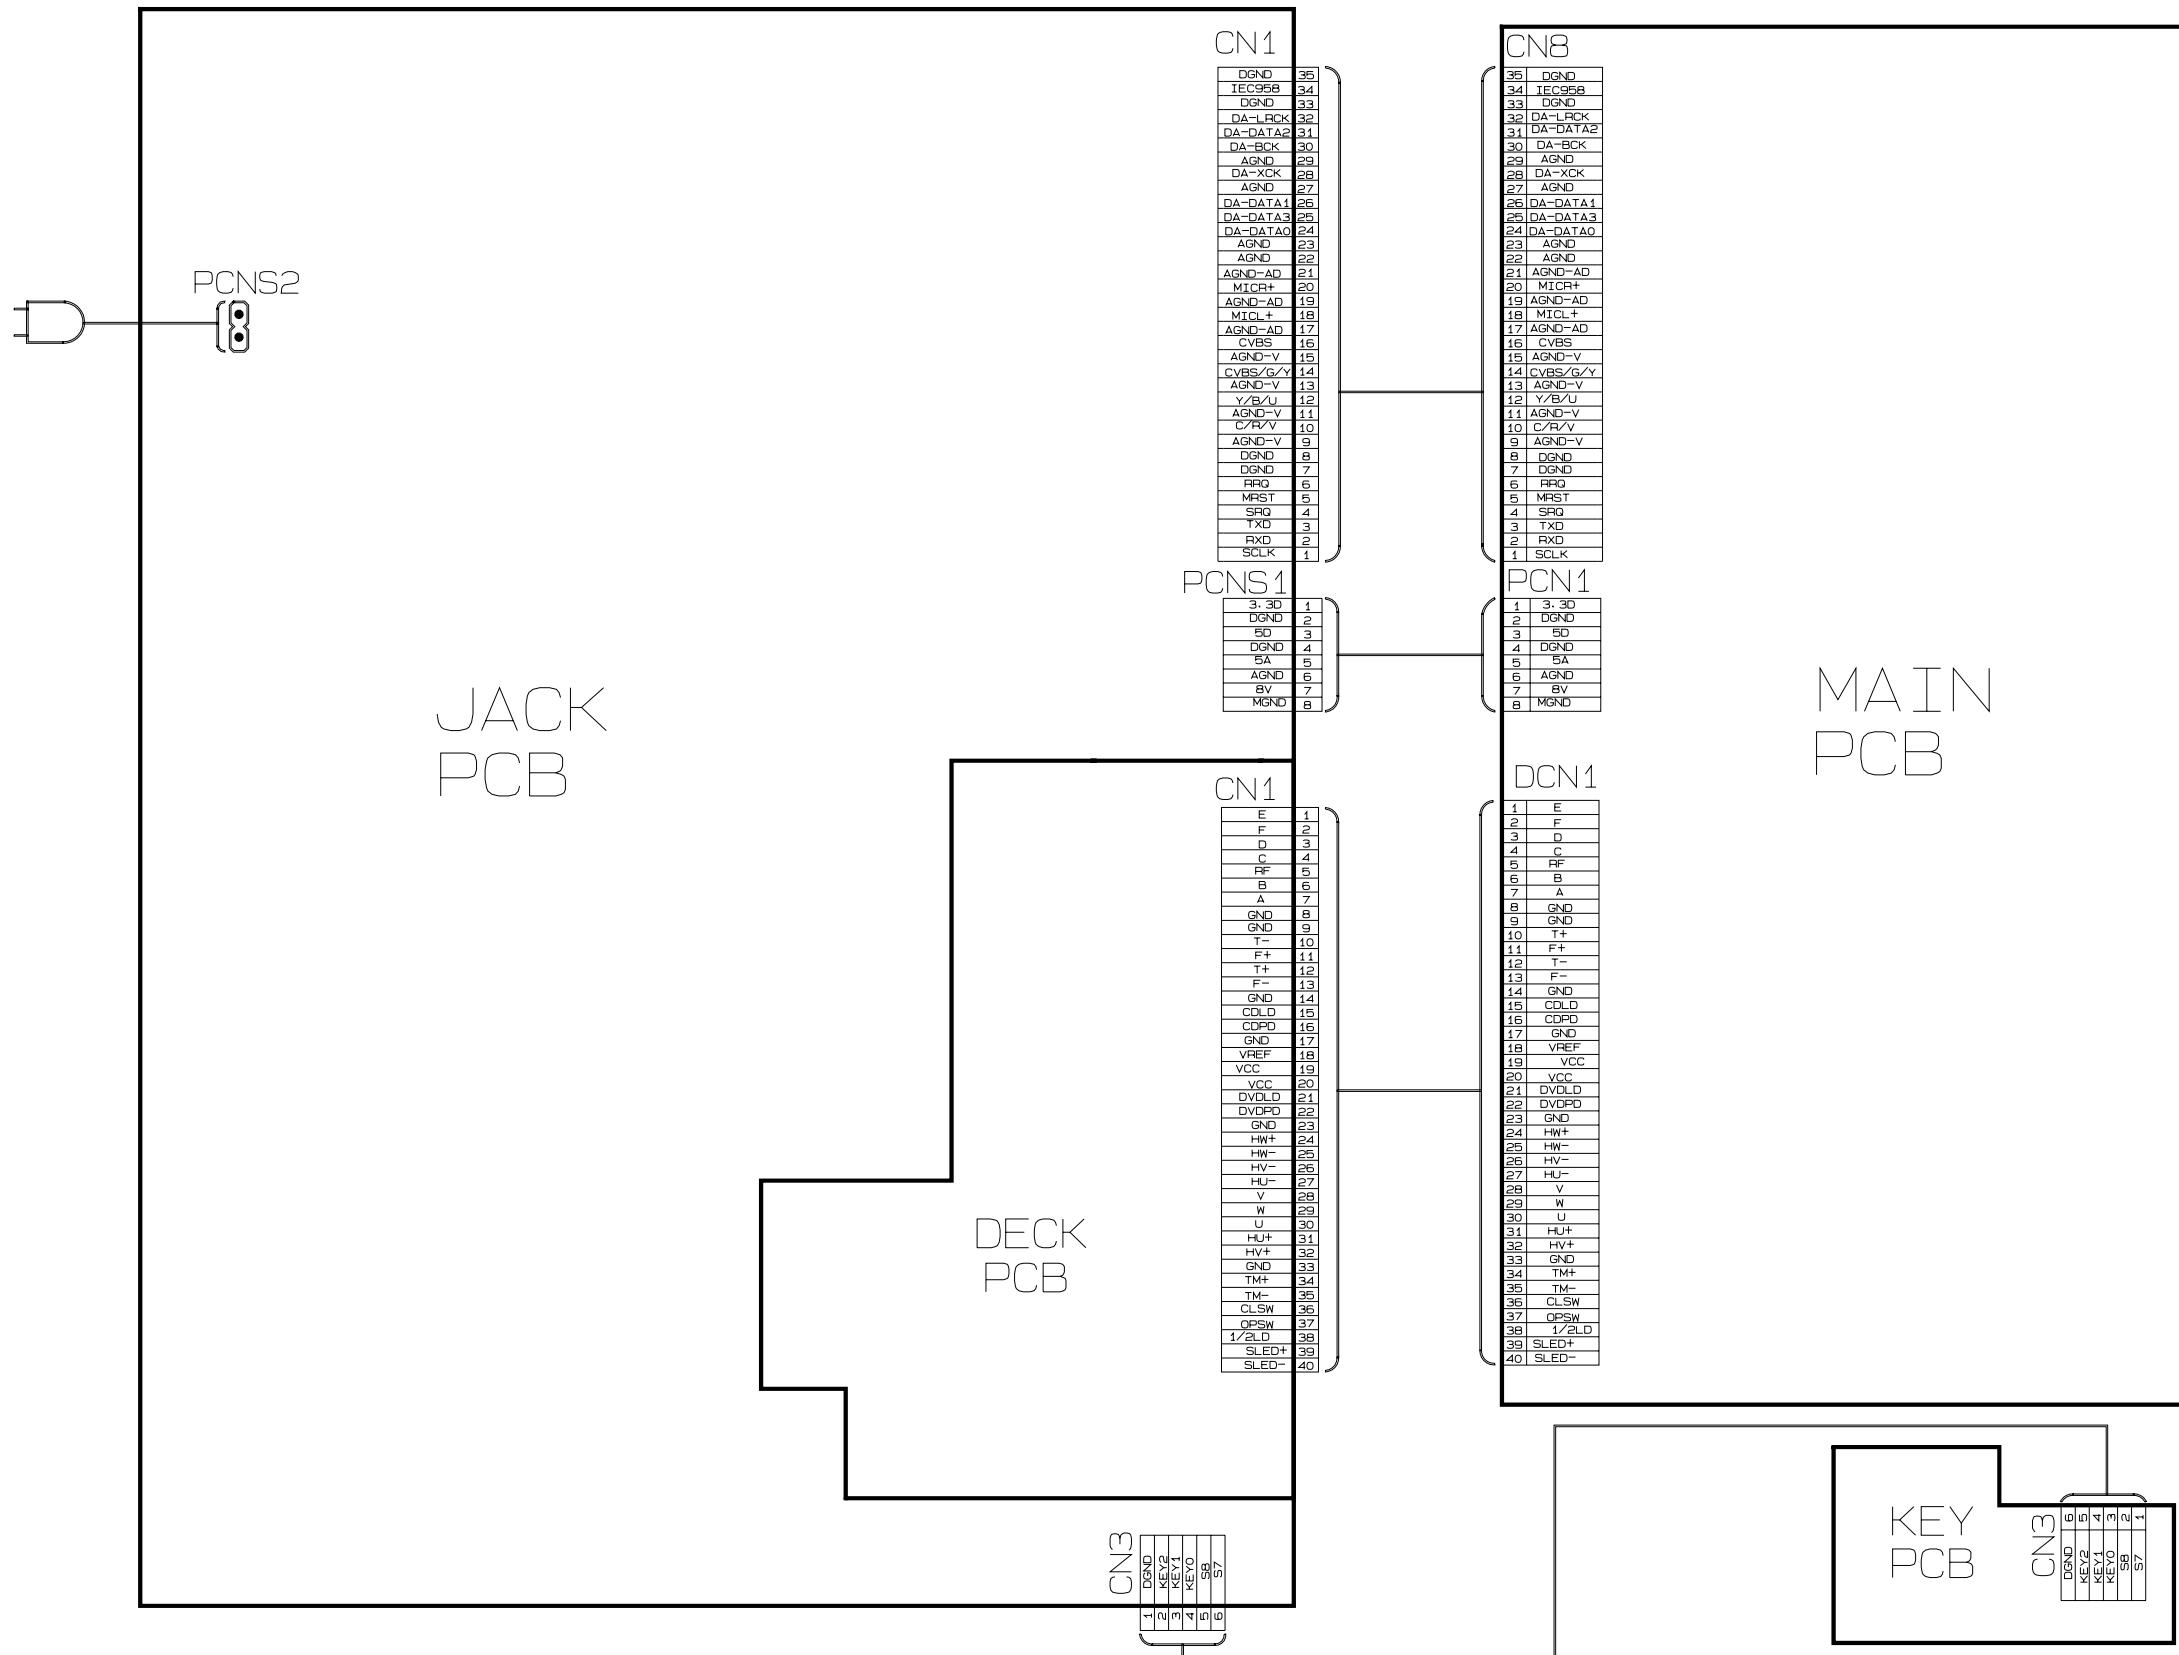


MEMO


12. Schematic Diagrams

- | | |
|------------------------------------|-------|
| 12-1 Power ----- | 12-2 |
| 12-2 Main-Micom ----- | 12-3 |
| 12-3 Servo ----- | 12-4 |
| 12-4 Video ----- | 12-5 |
| 12-5 Audio ----- | 12-6 |
| 12-6 RF ----- | 12-7 |
| 12-7 ZiVA ----- | 12-8 |
| 12-8 DSP ----- | 12-9 |
| 12-9 Front-Micom/VFD Display ----- | 12-10 |
| 12-10 Key ----- | 12-11 |
| 12-11 Deck ----- | 12-12 |
| 12-12 Remote Control ----- | 12-13 |

Block Identification of PCB

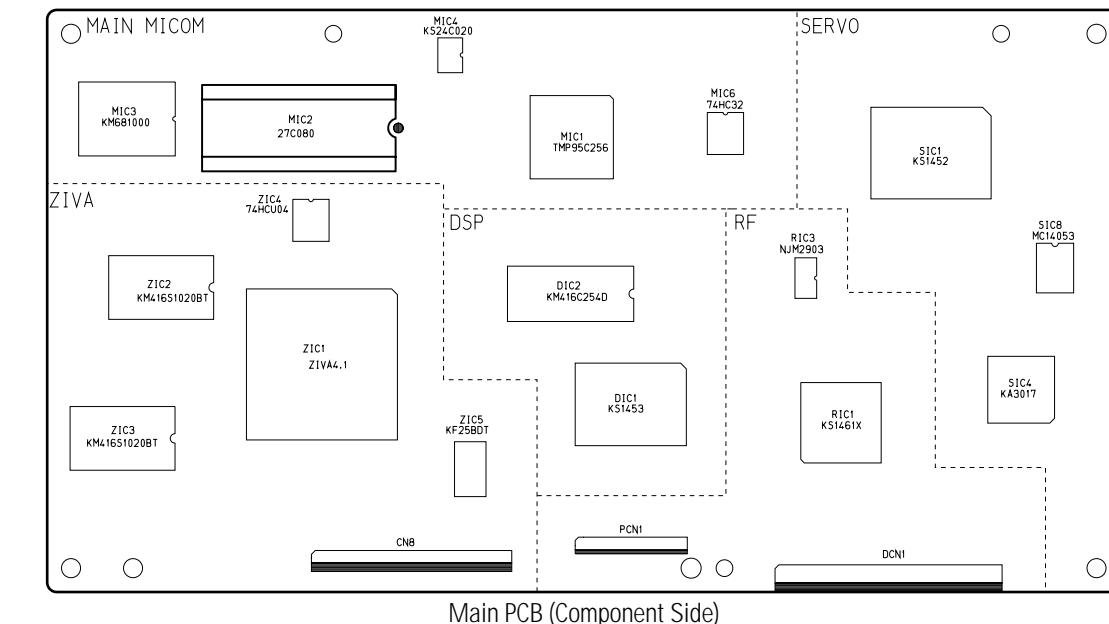


Main PCB (Component Side)

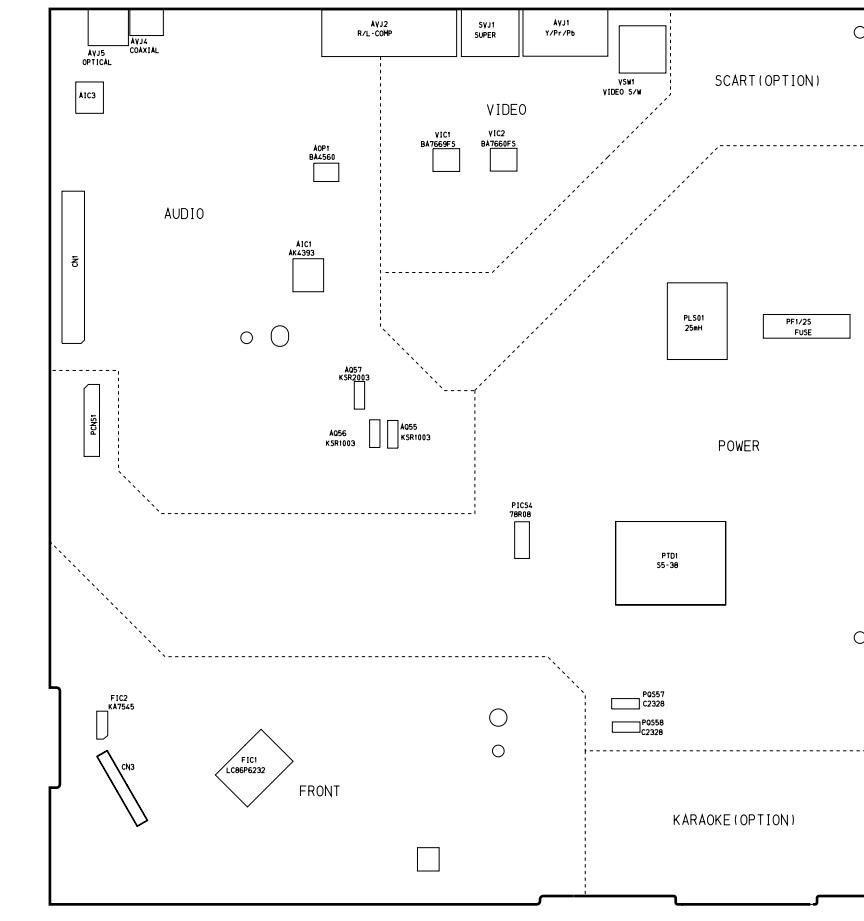


Jack PCB (Conductor Side)


12-1 Power

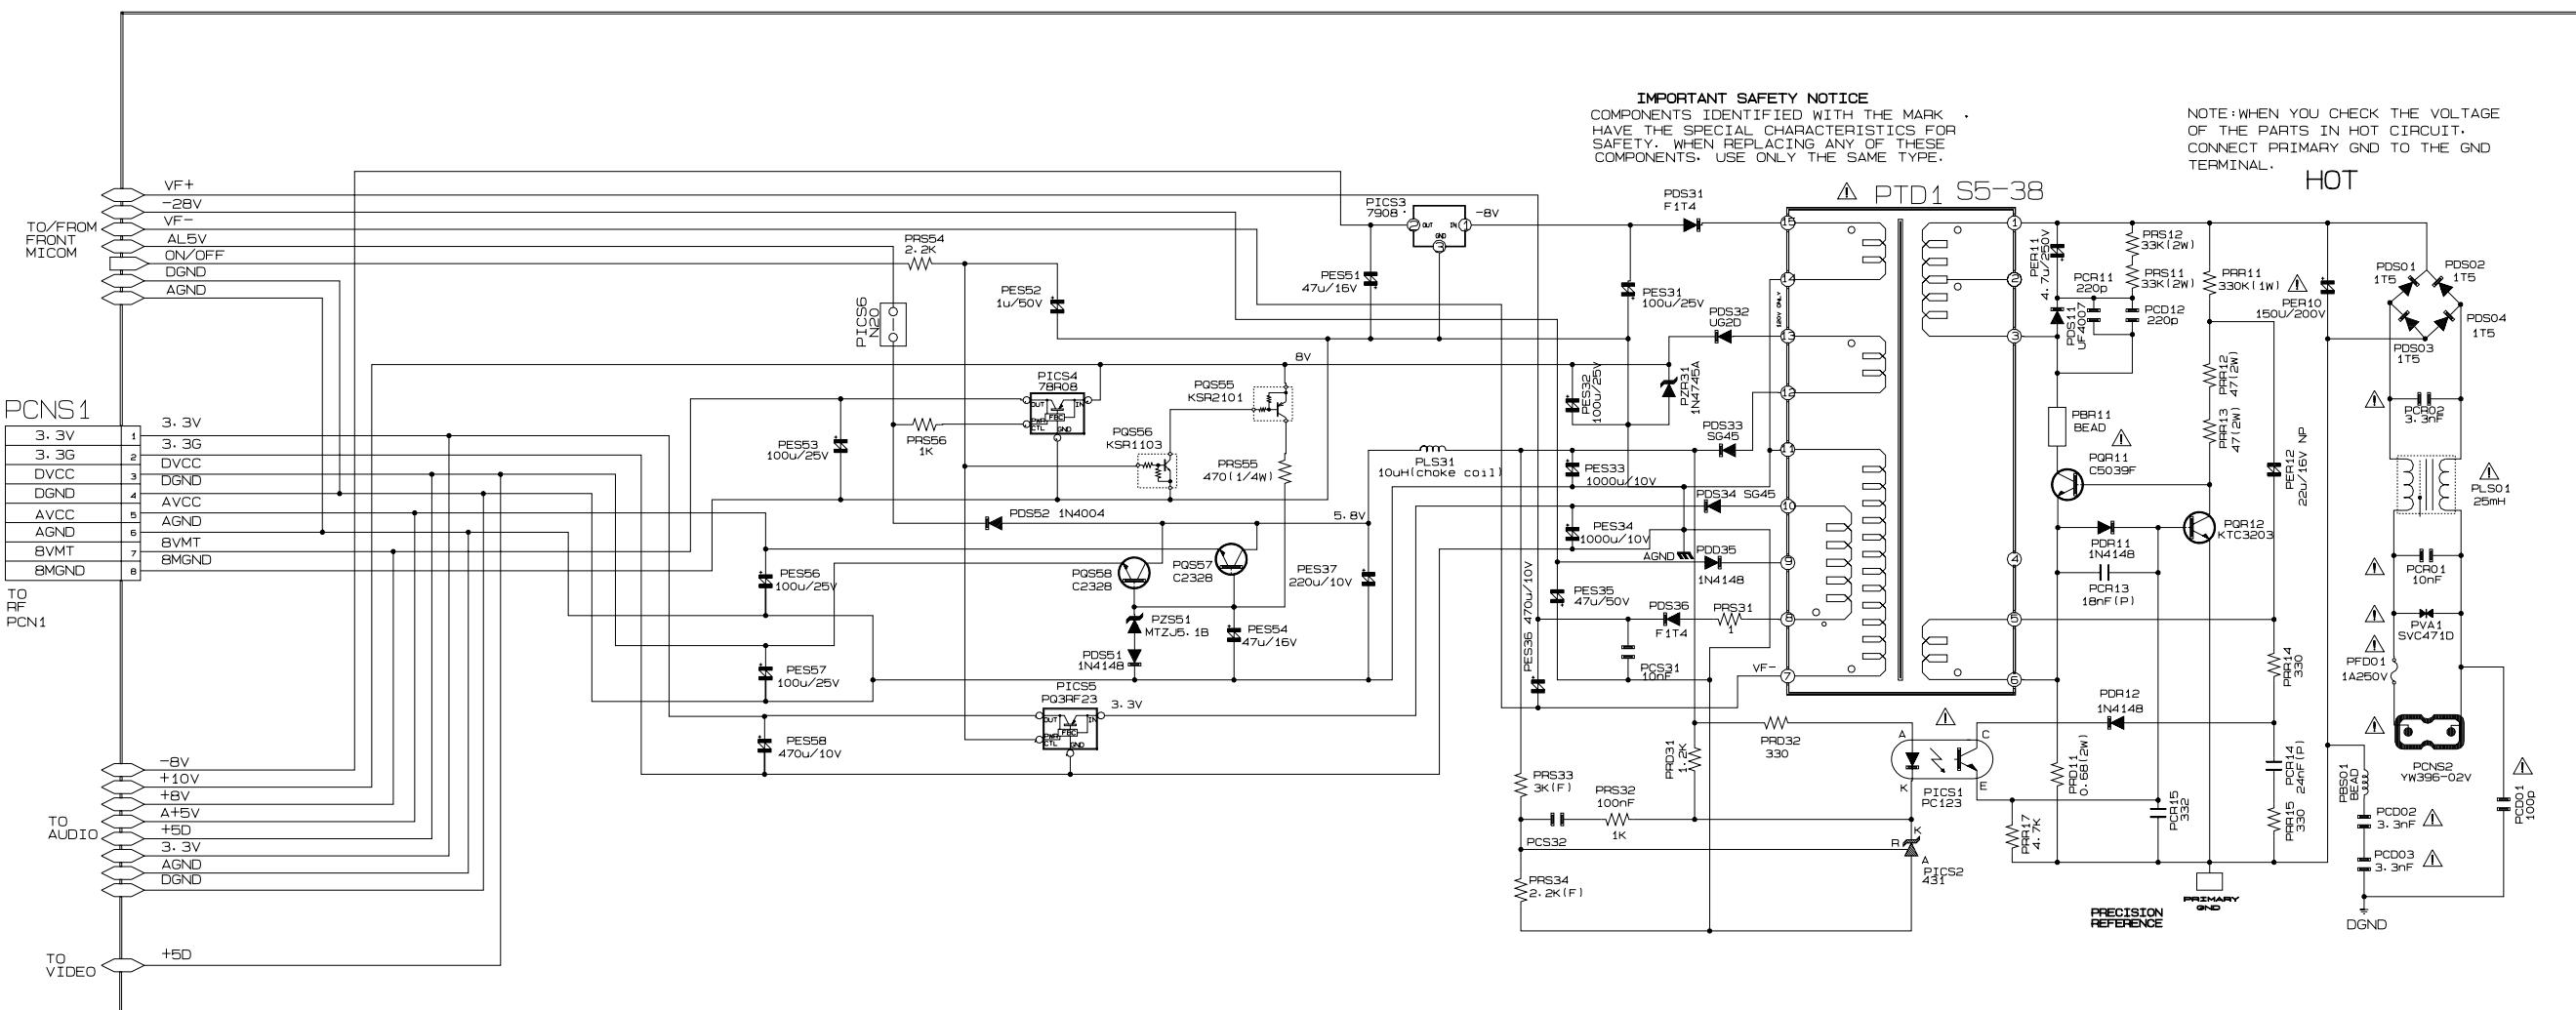


12-2 Main-Micom

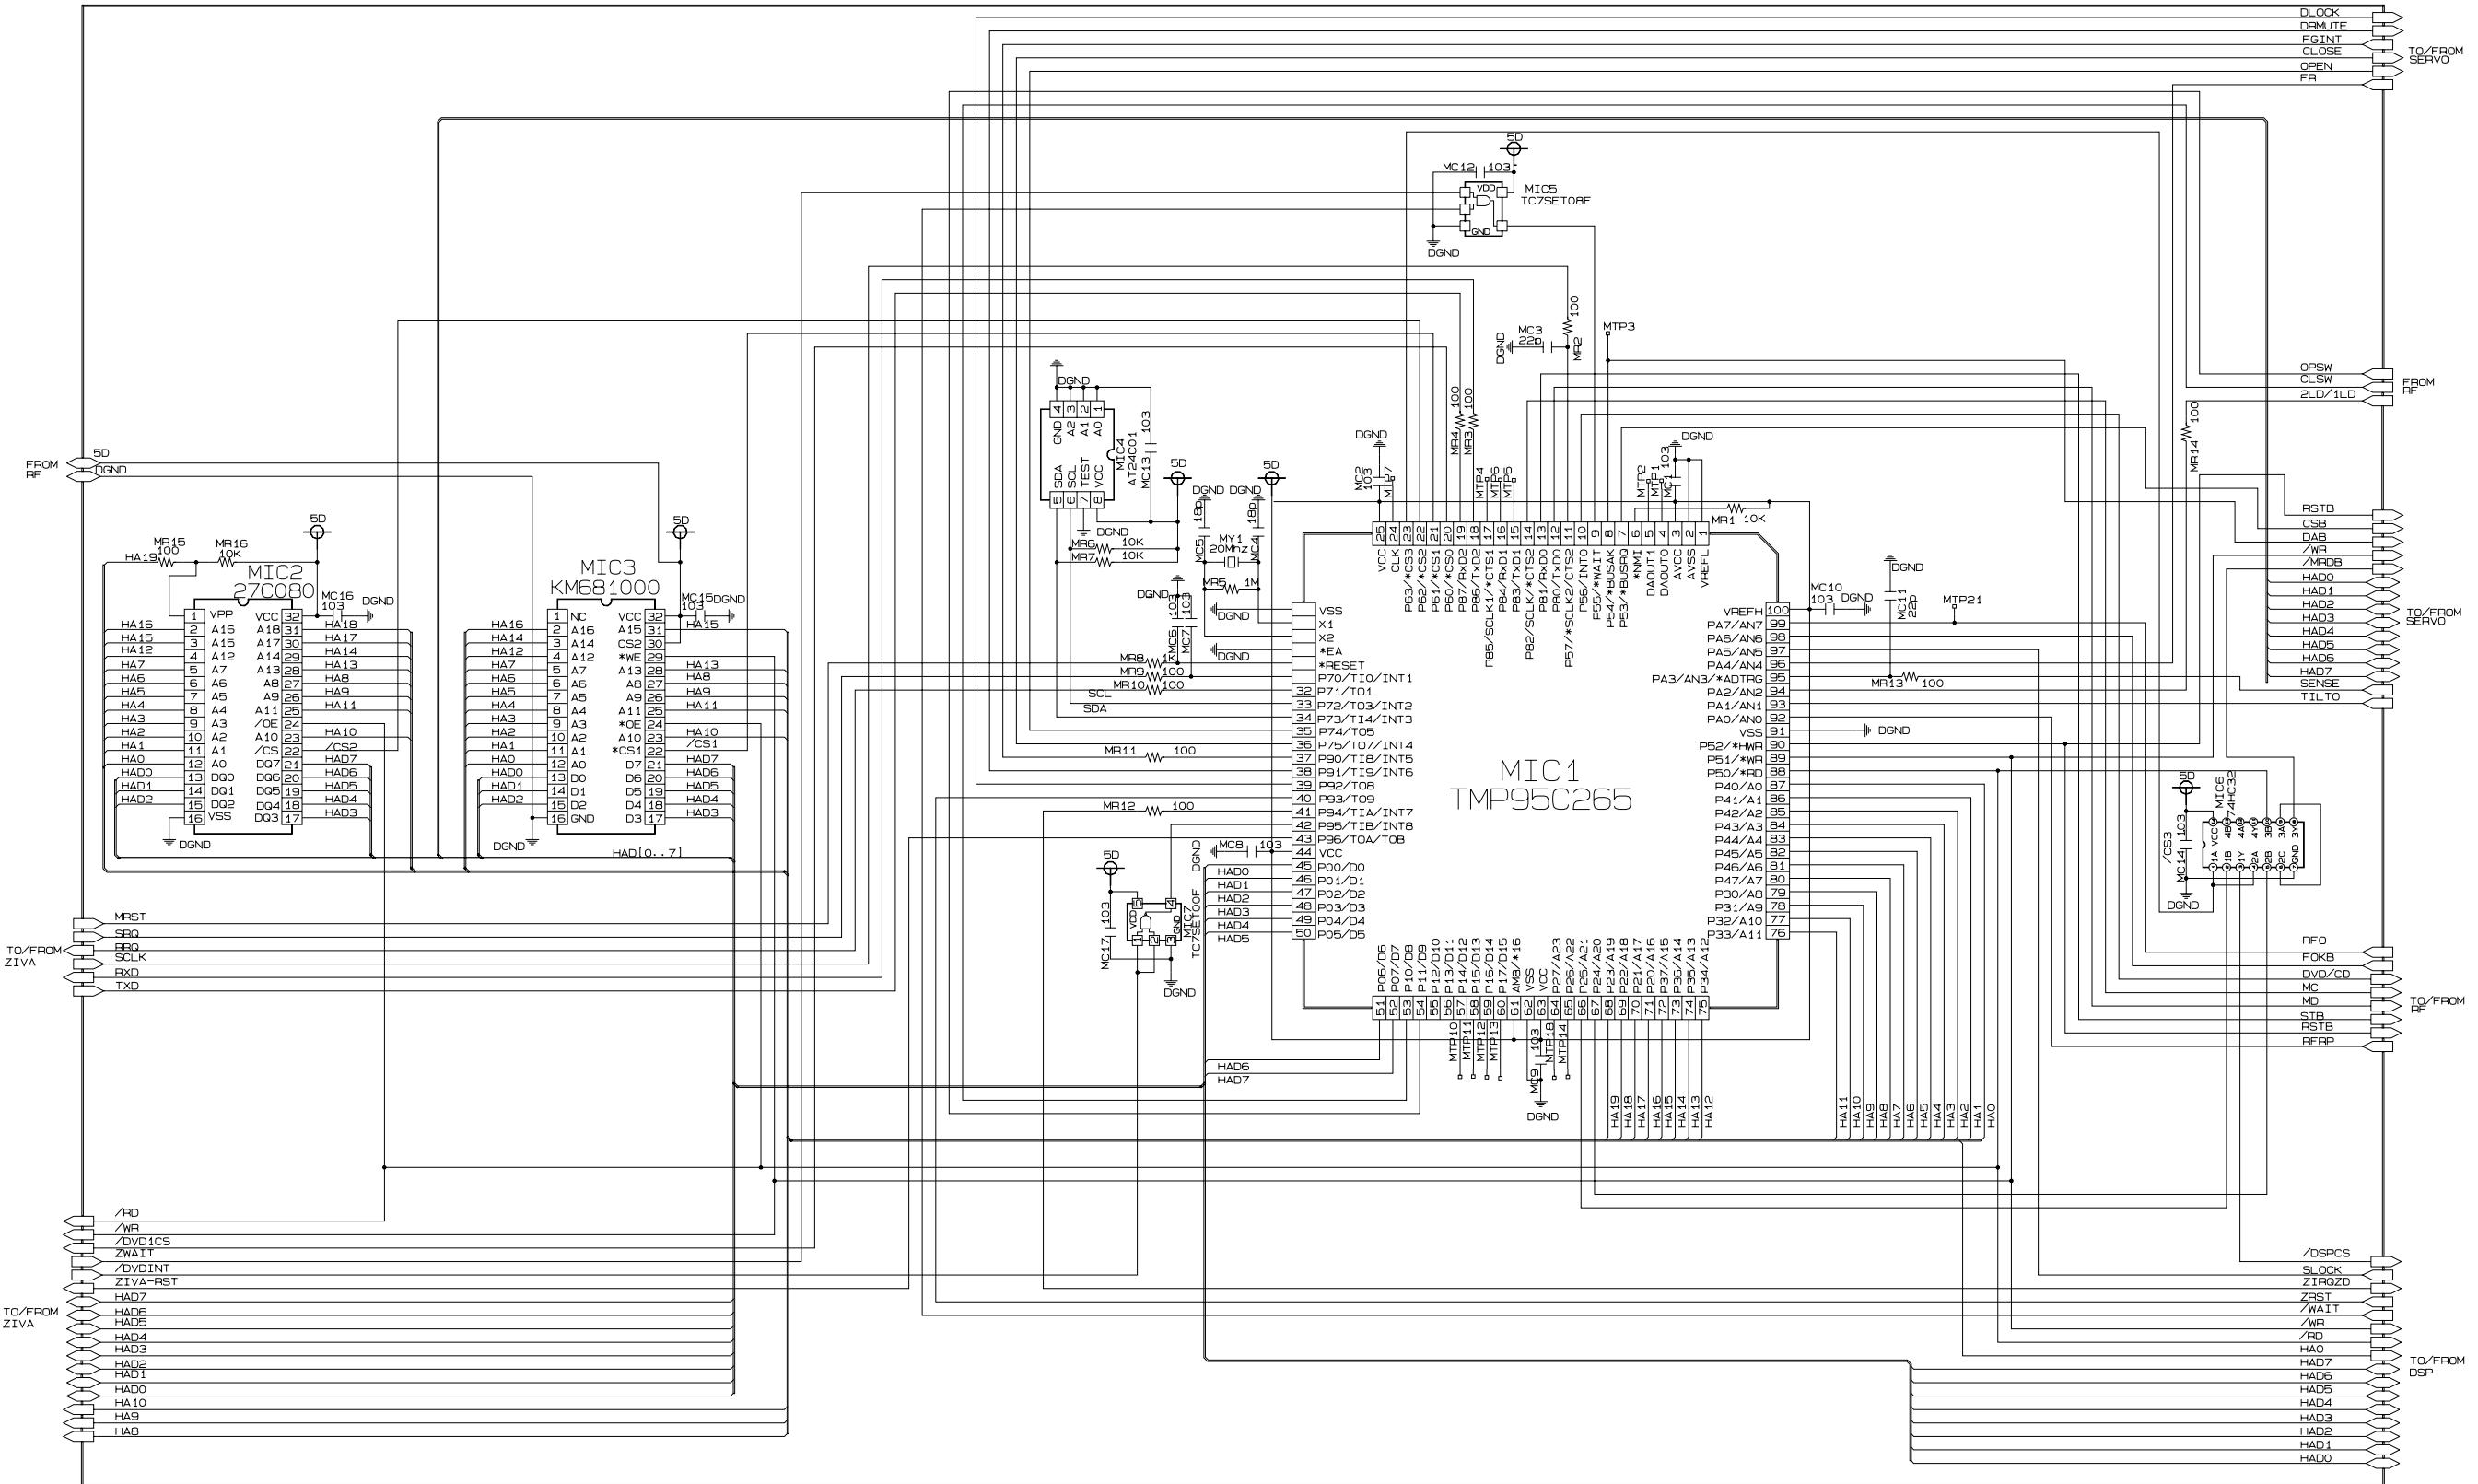


12-3 Servo

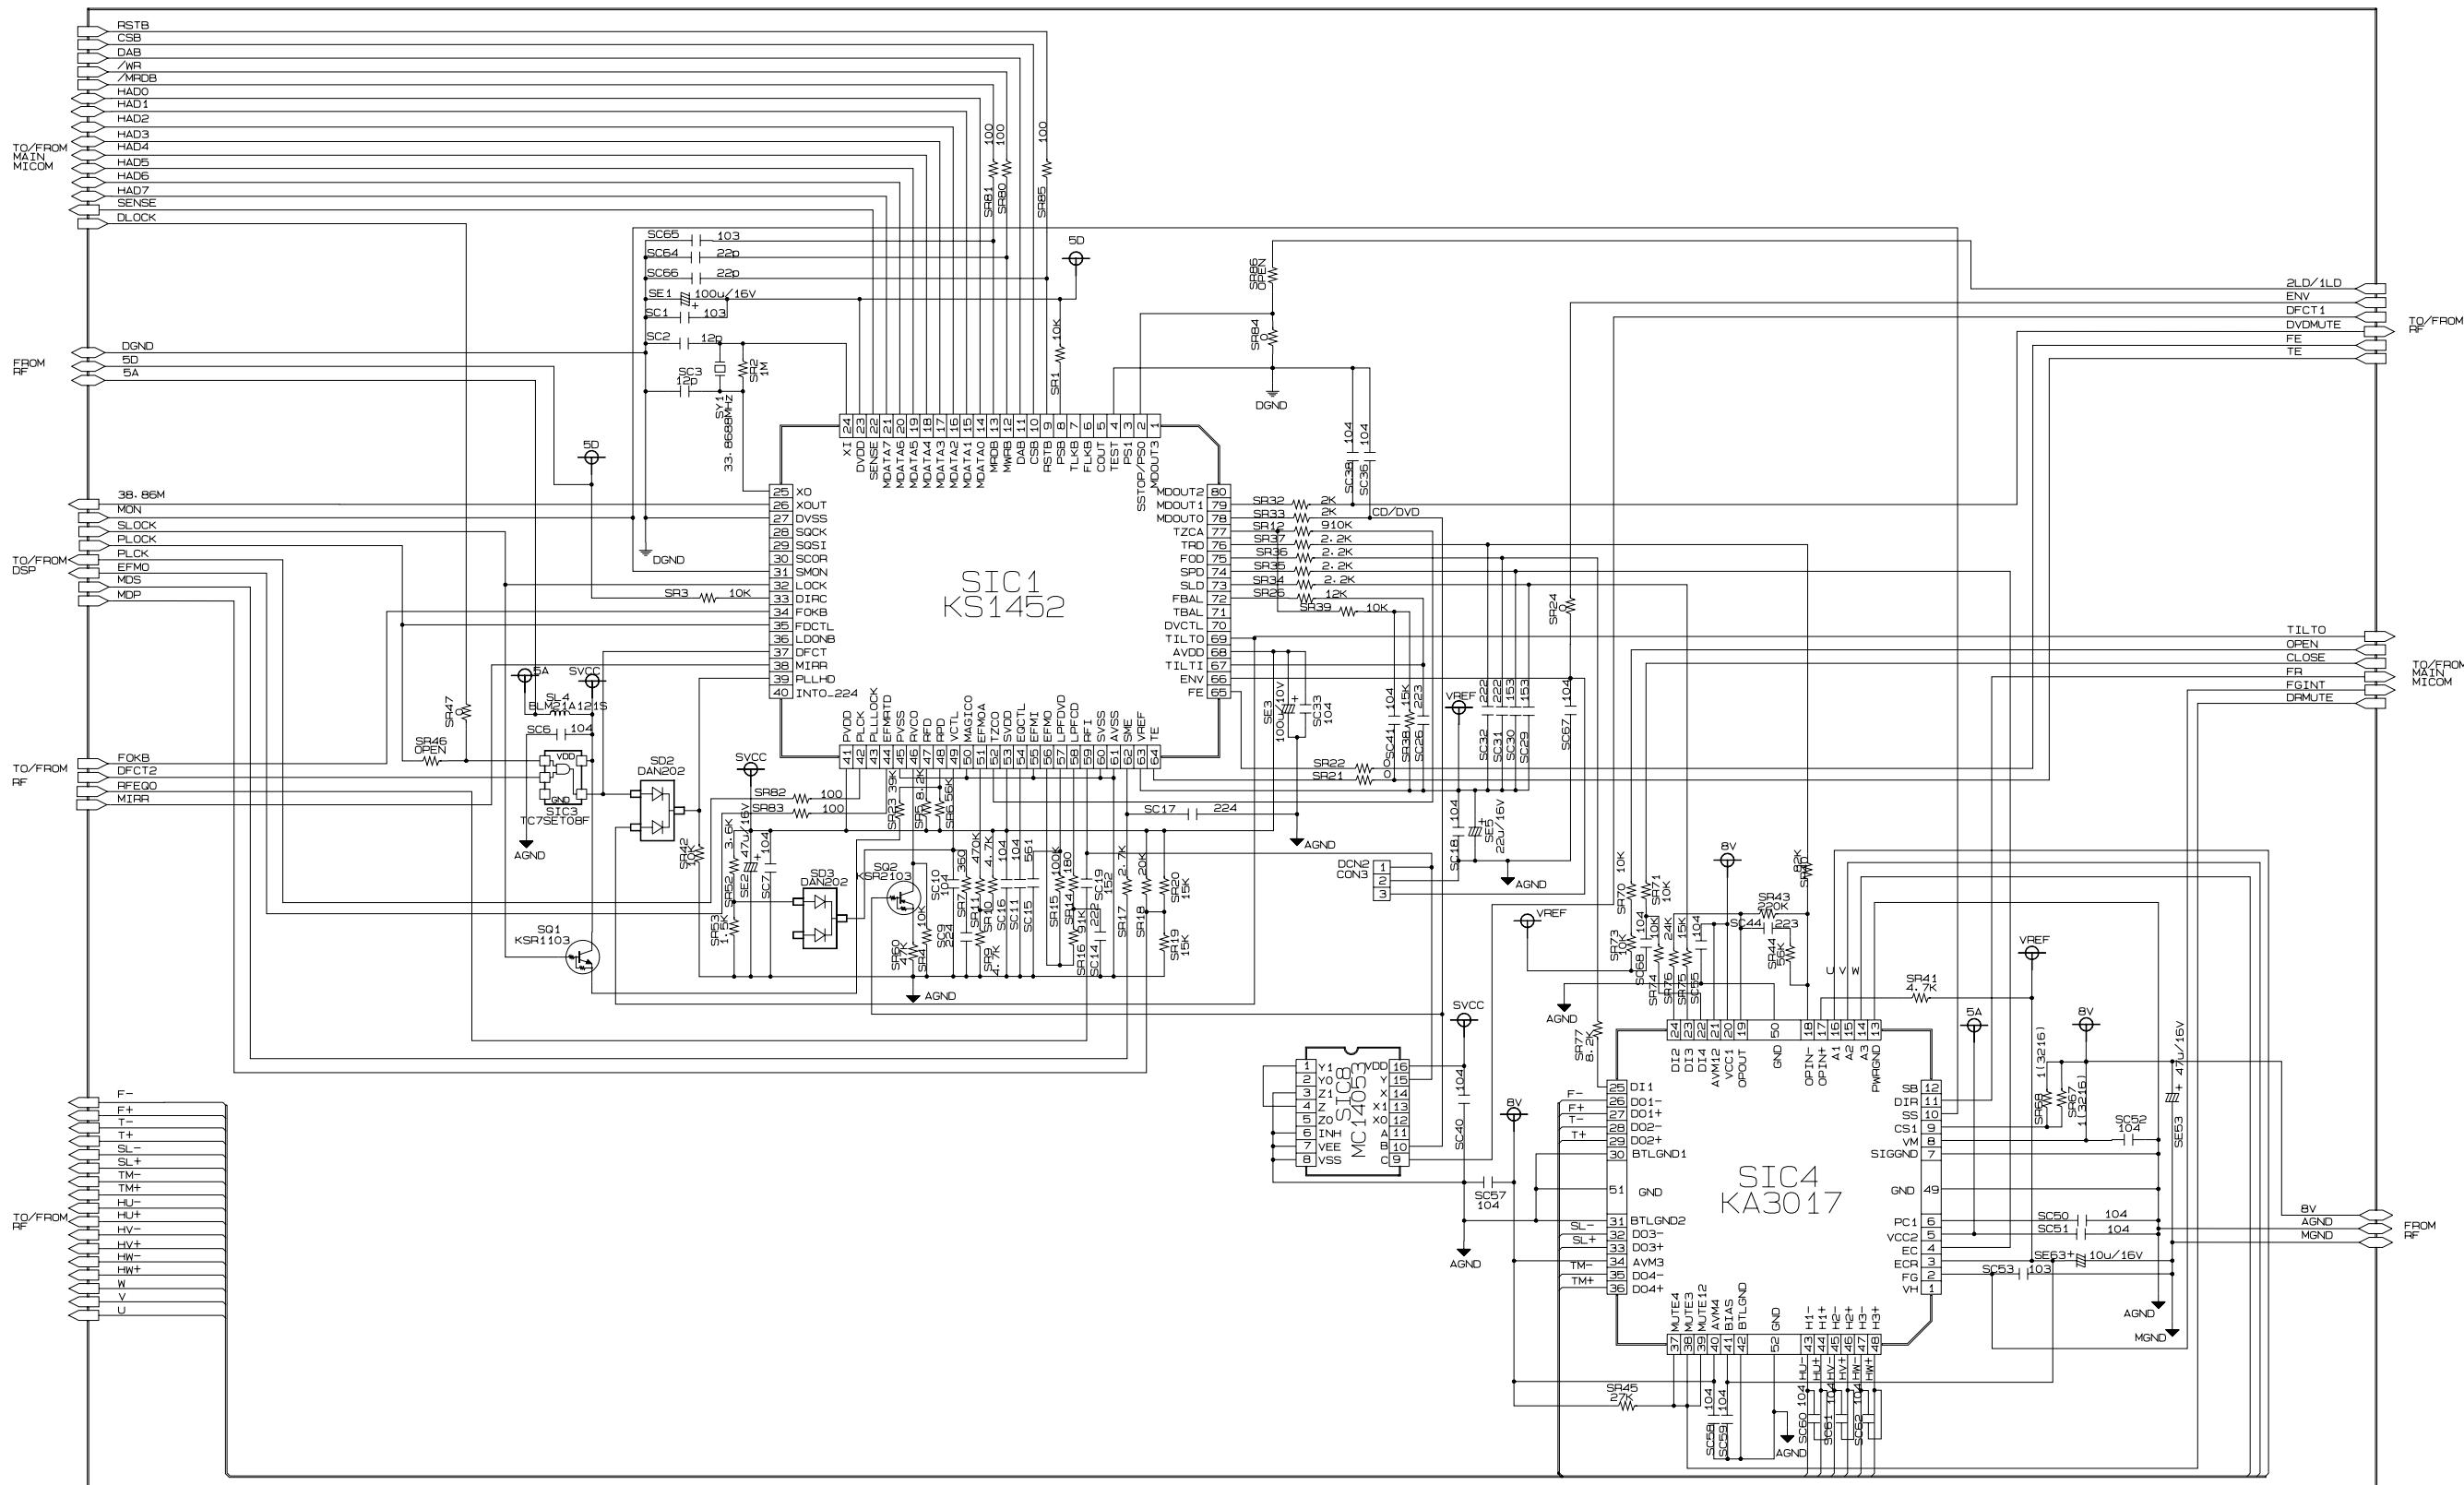


12-4 Video

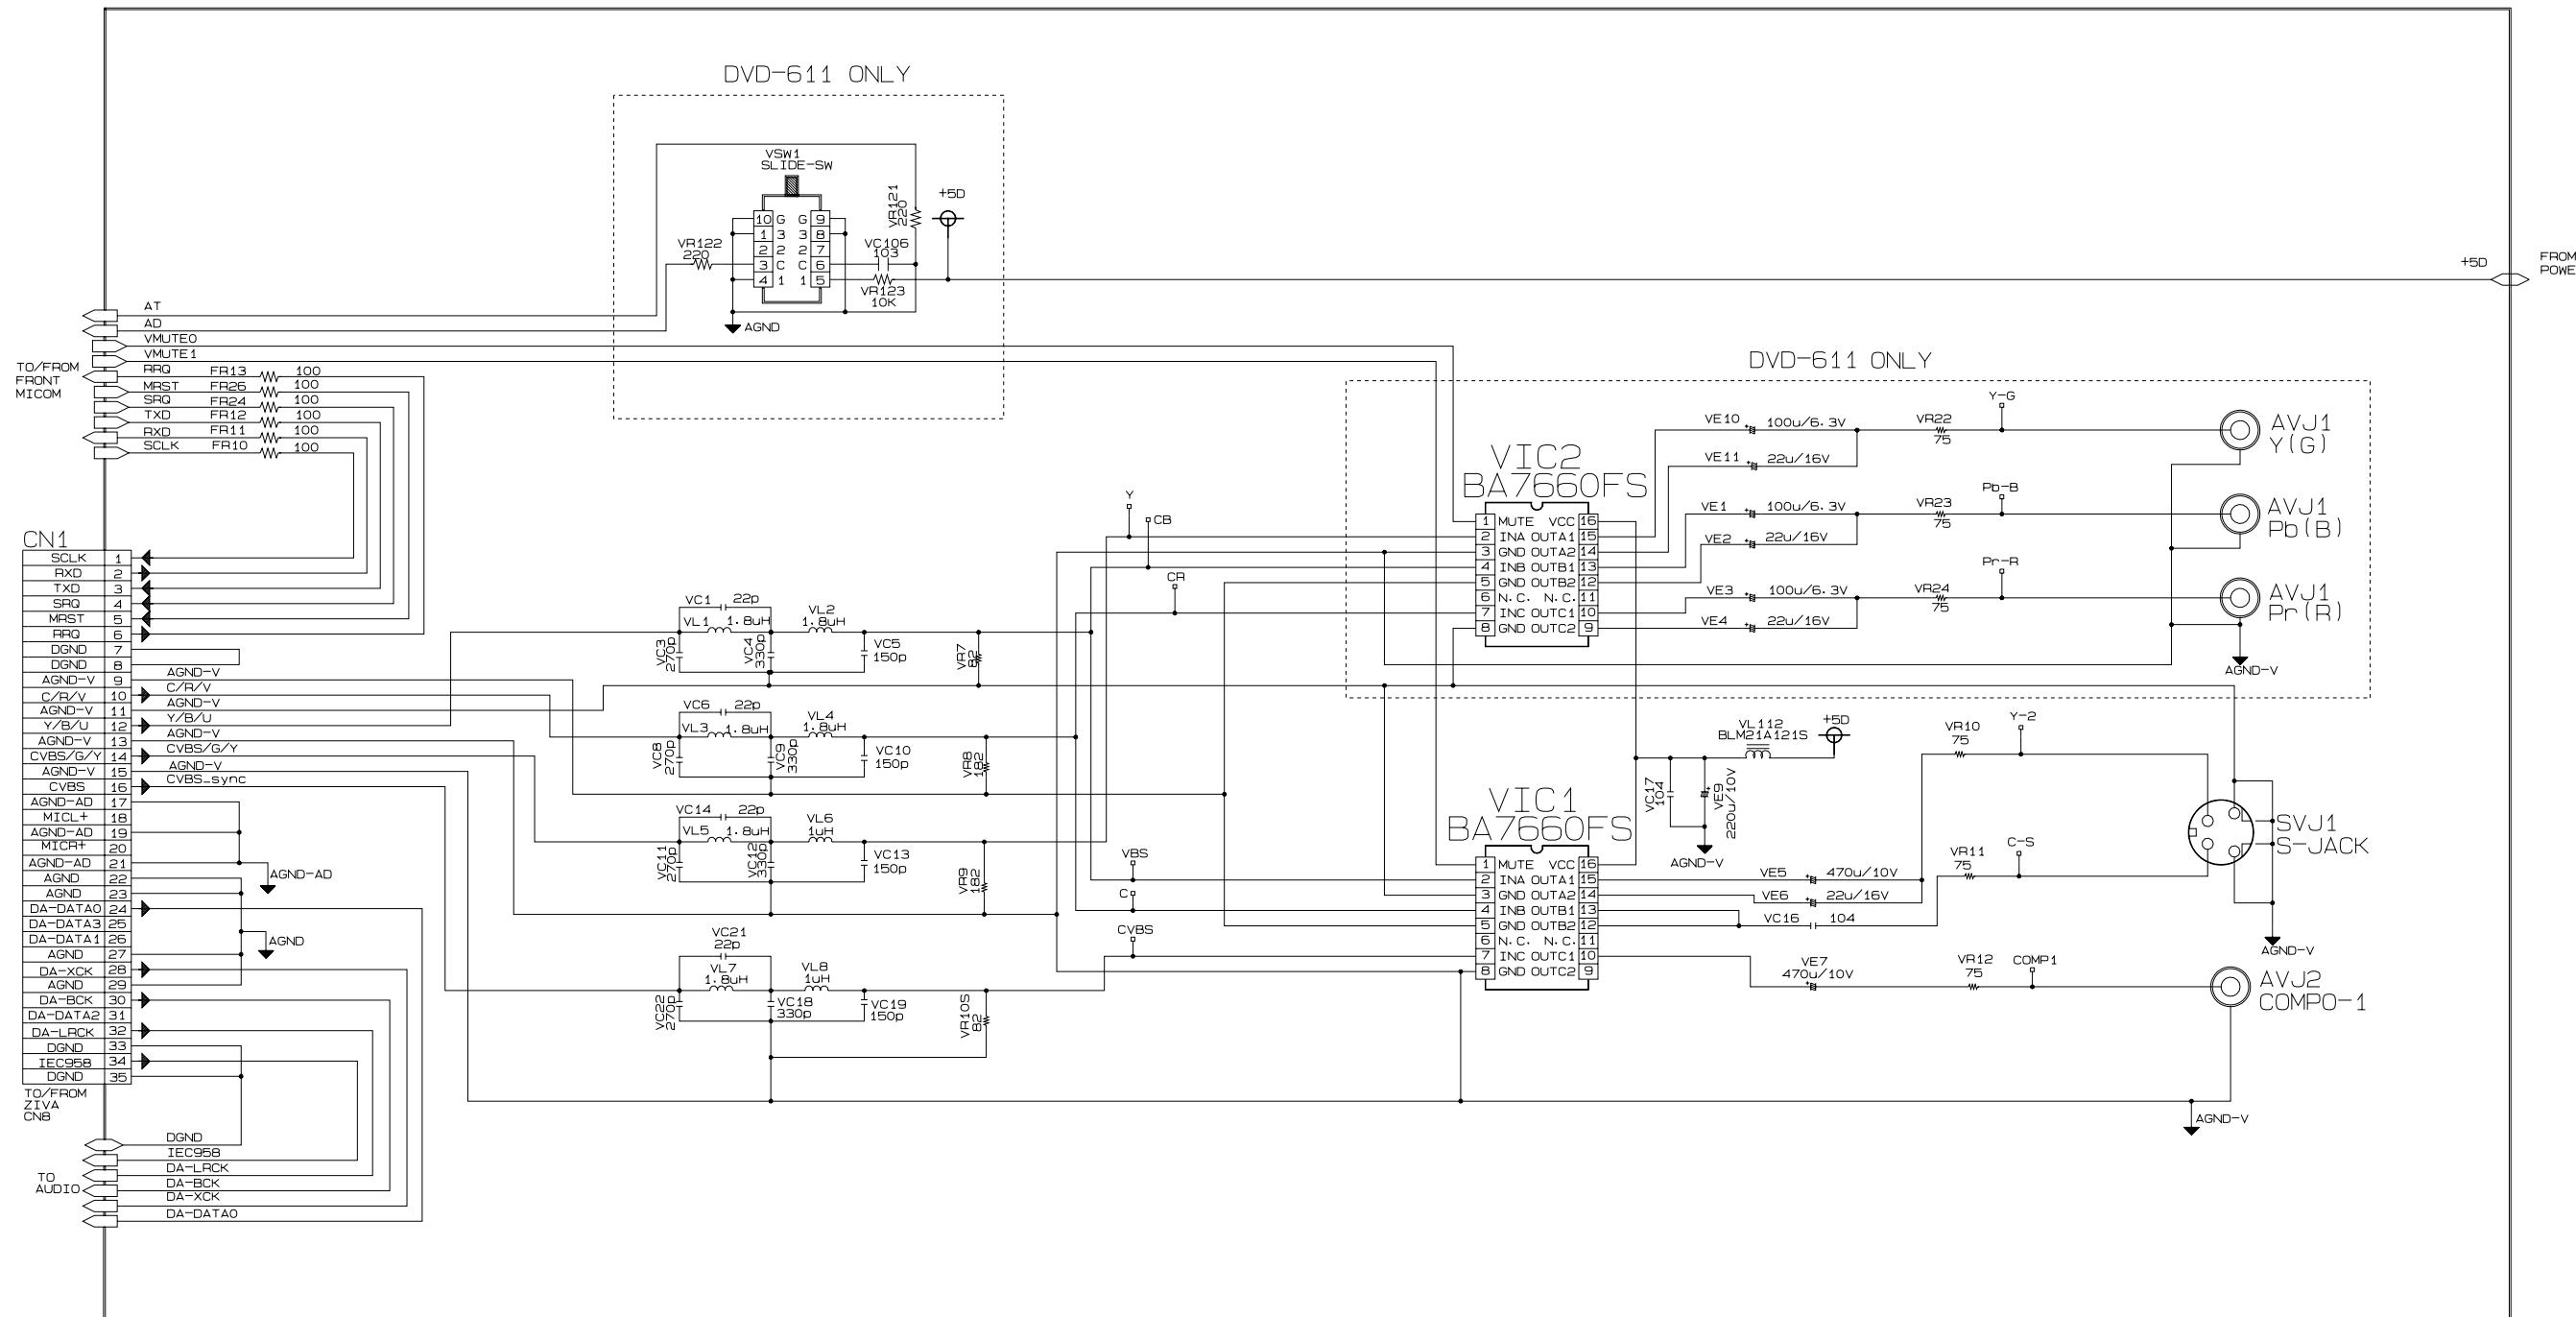


12-5 Audio

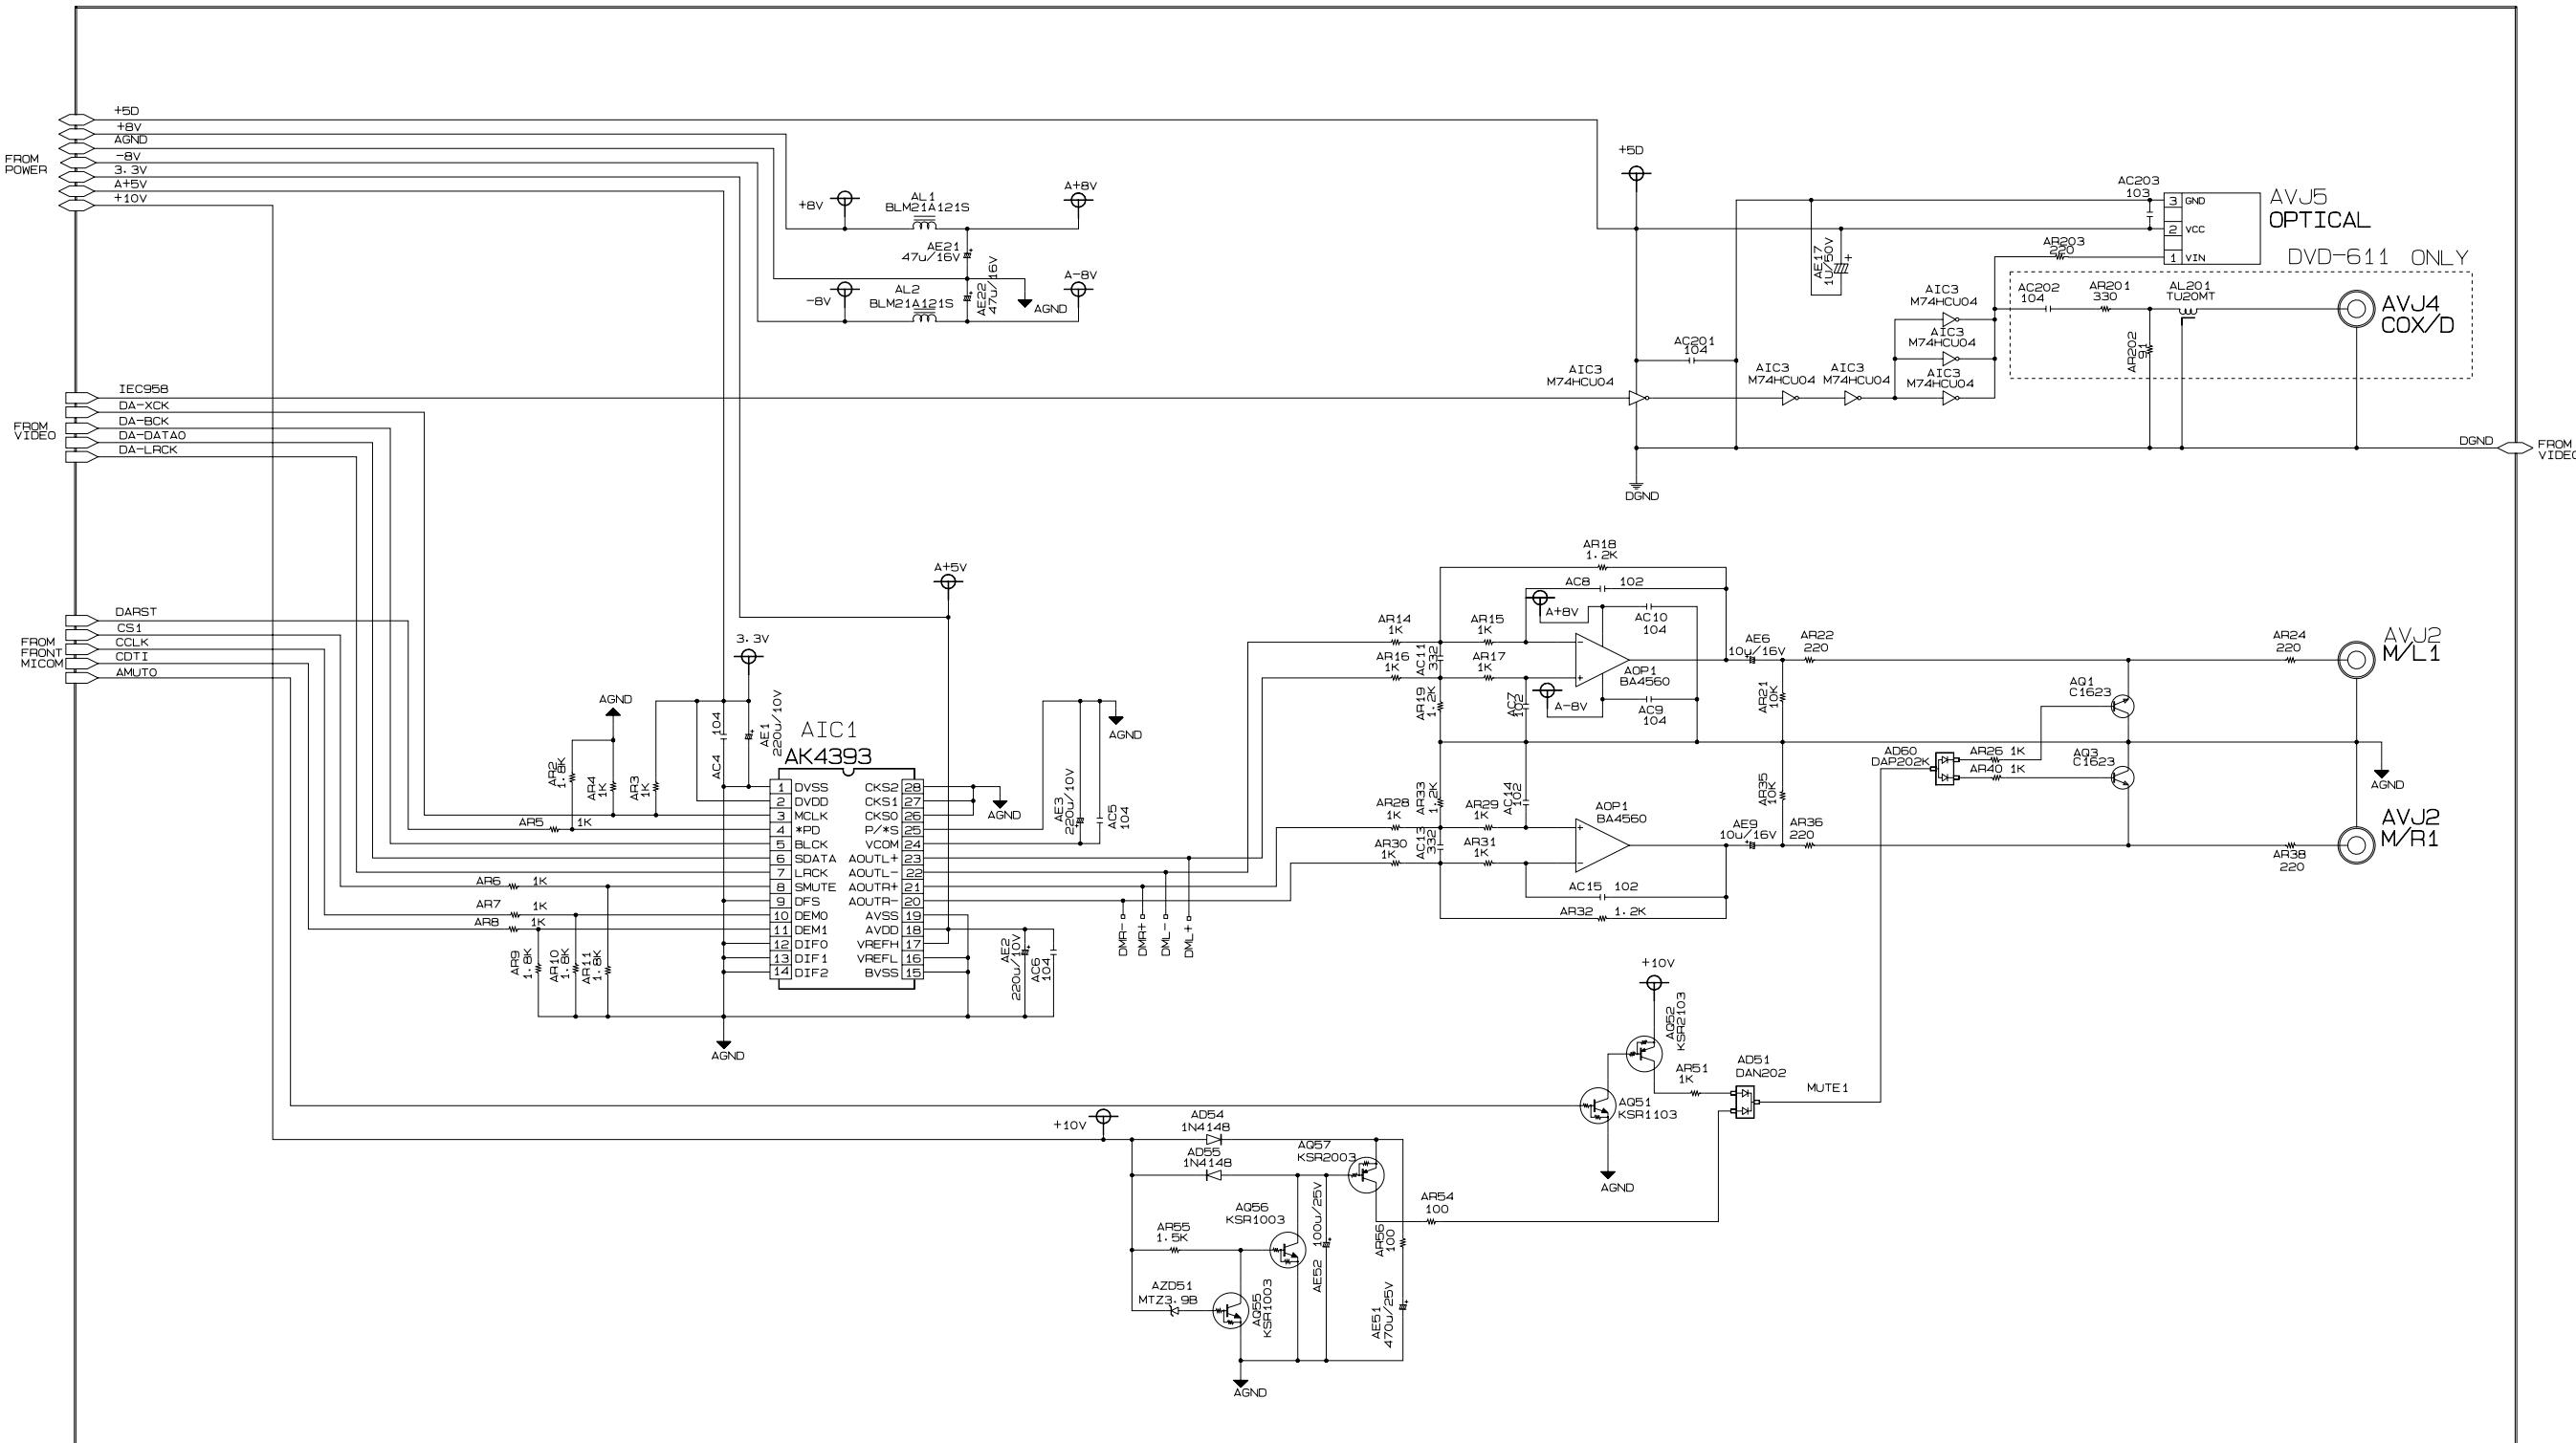


12-6 RF

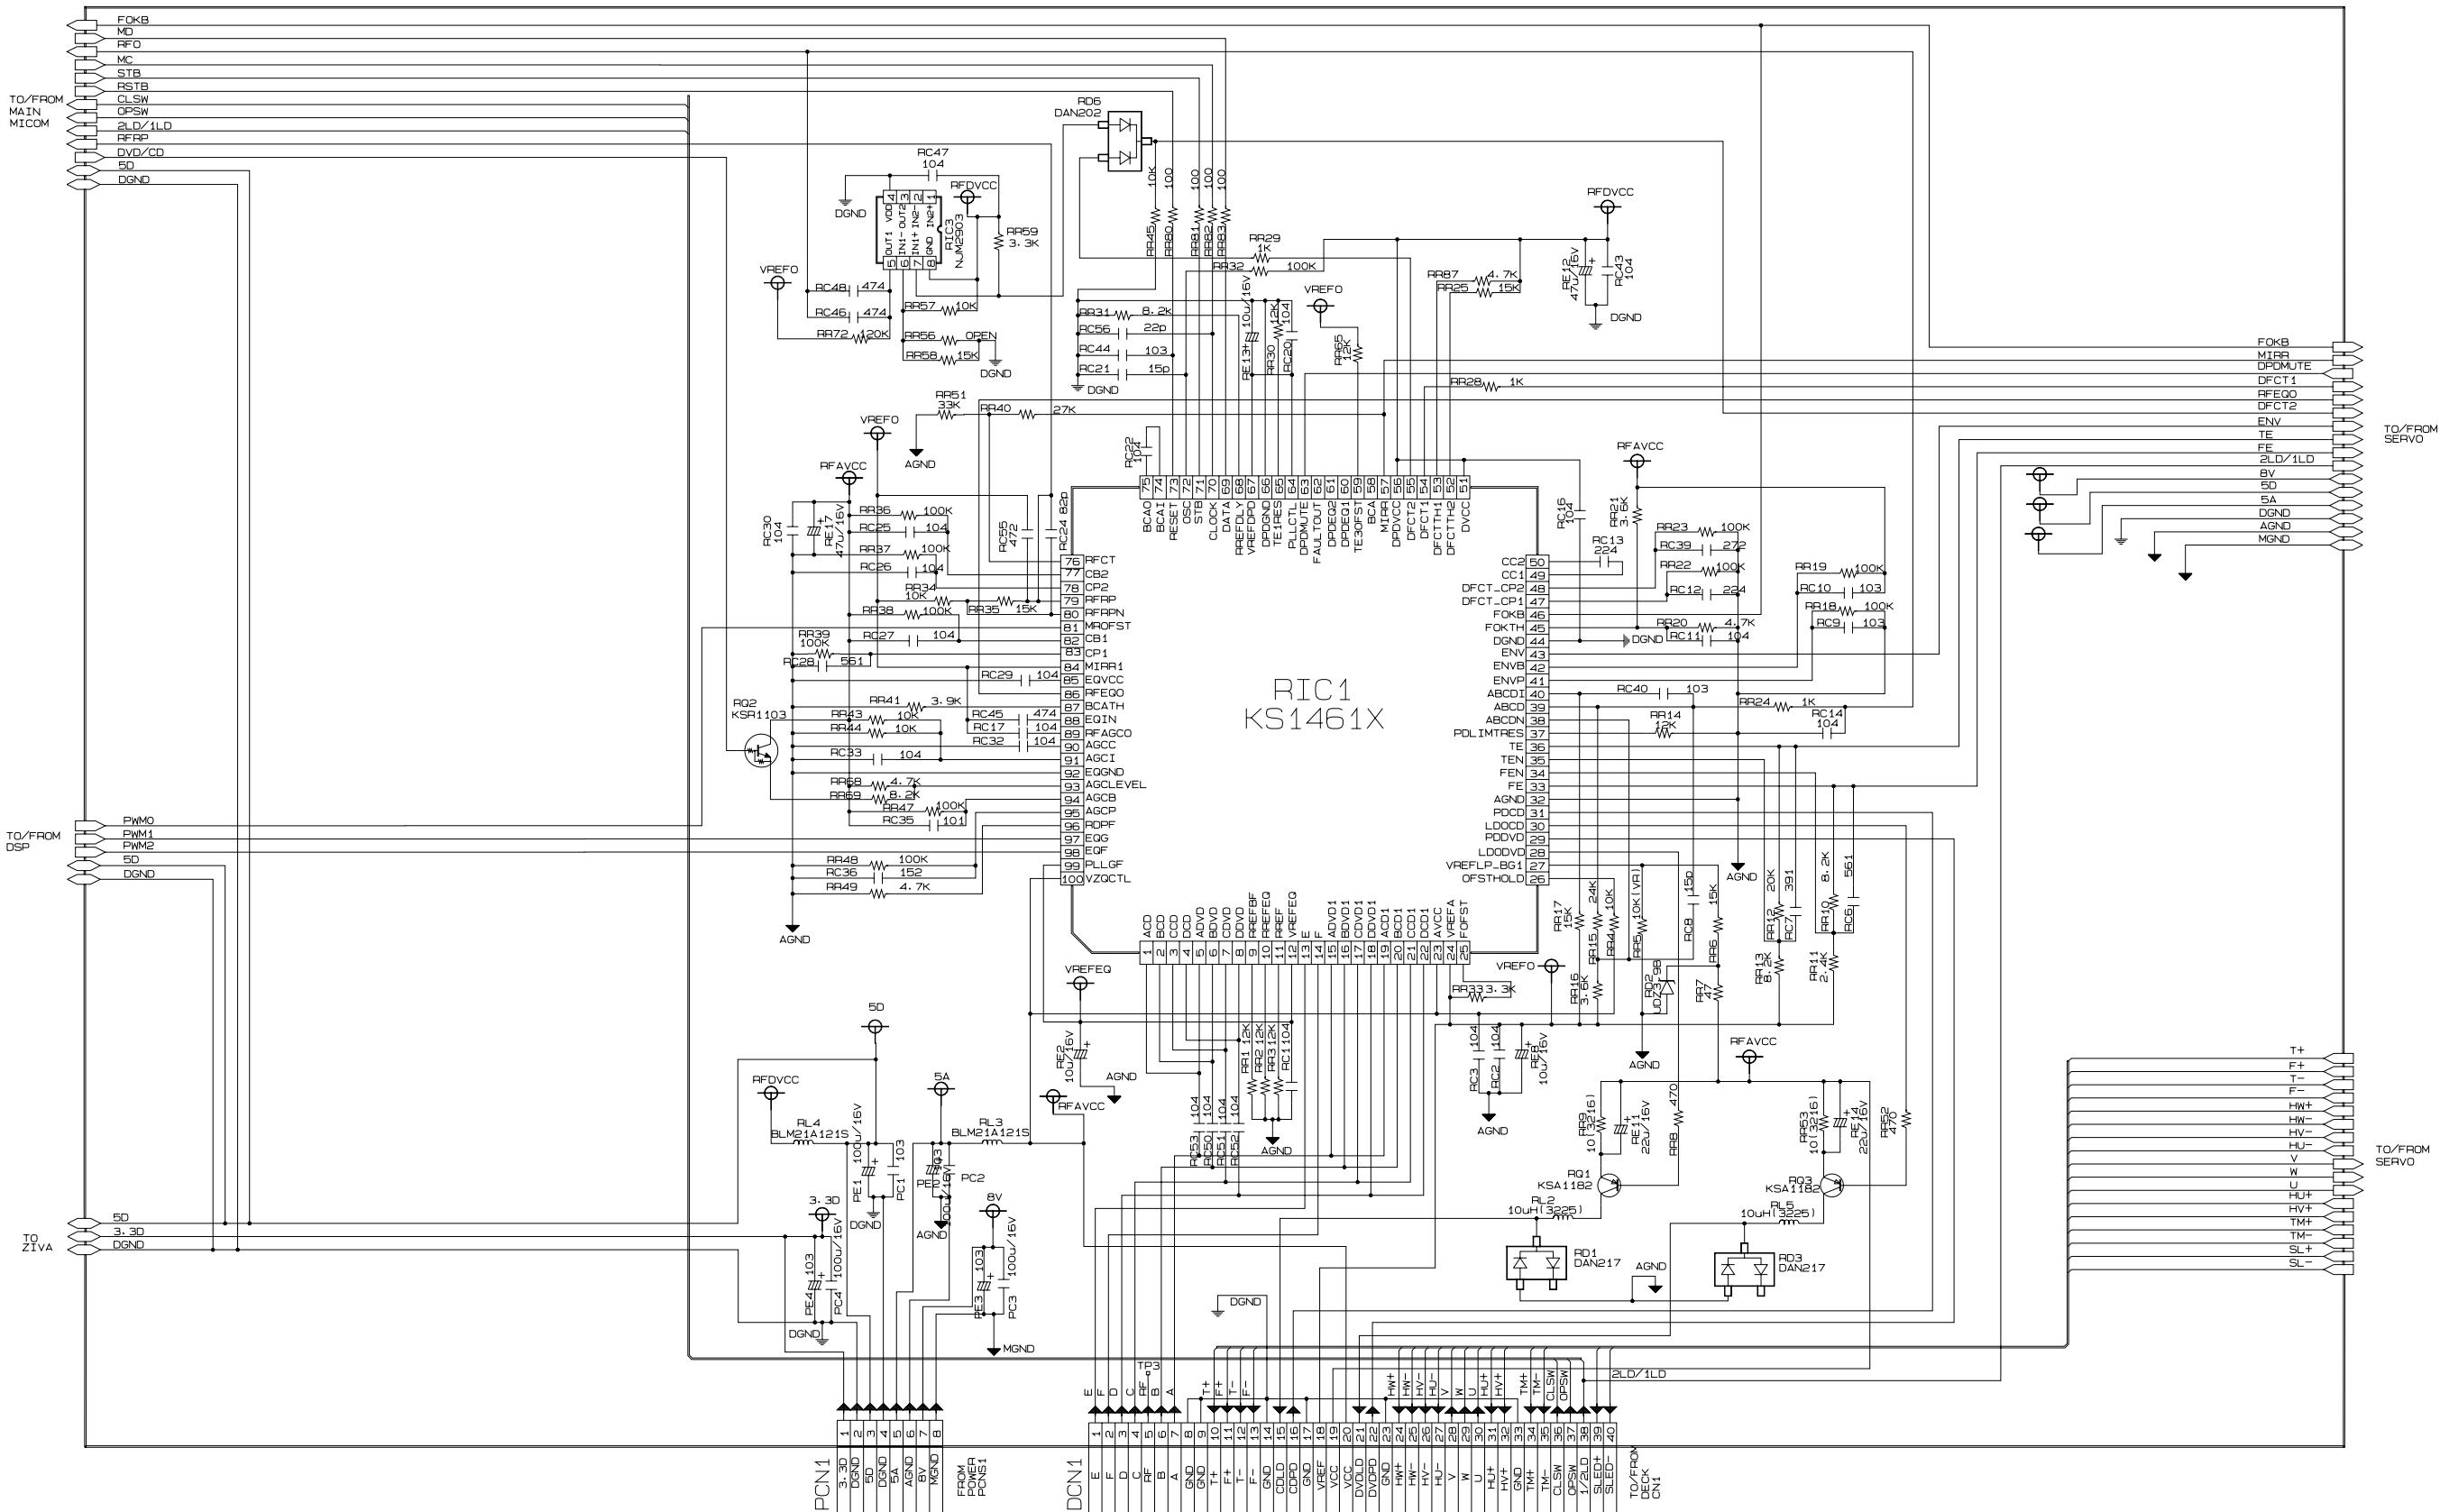


12-7 ZiVA

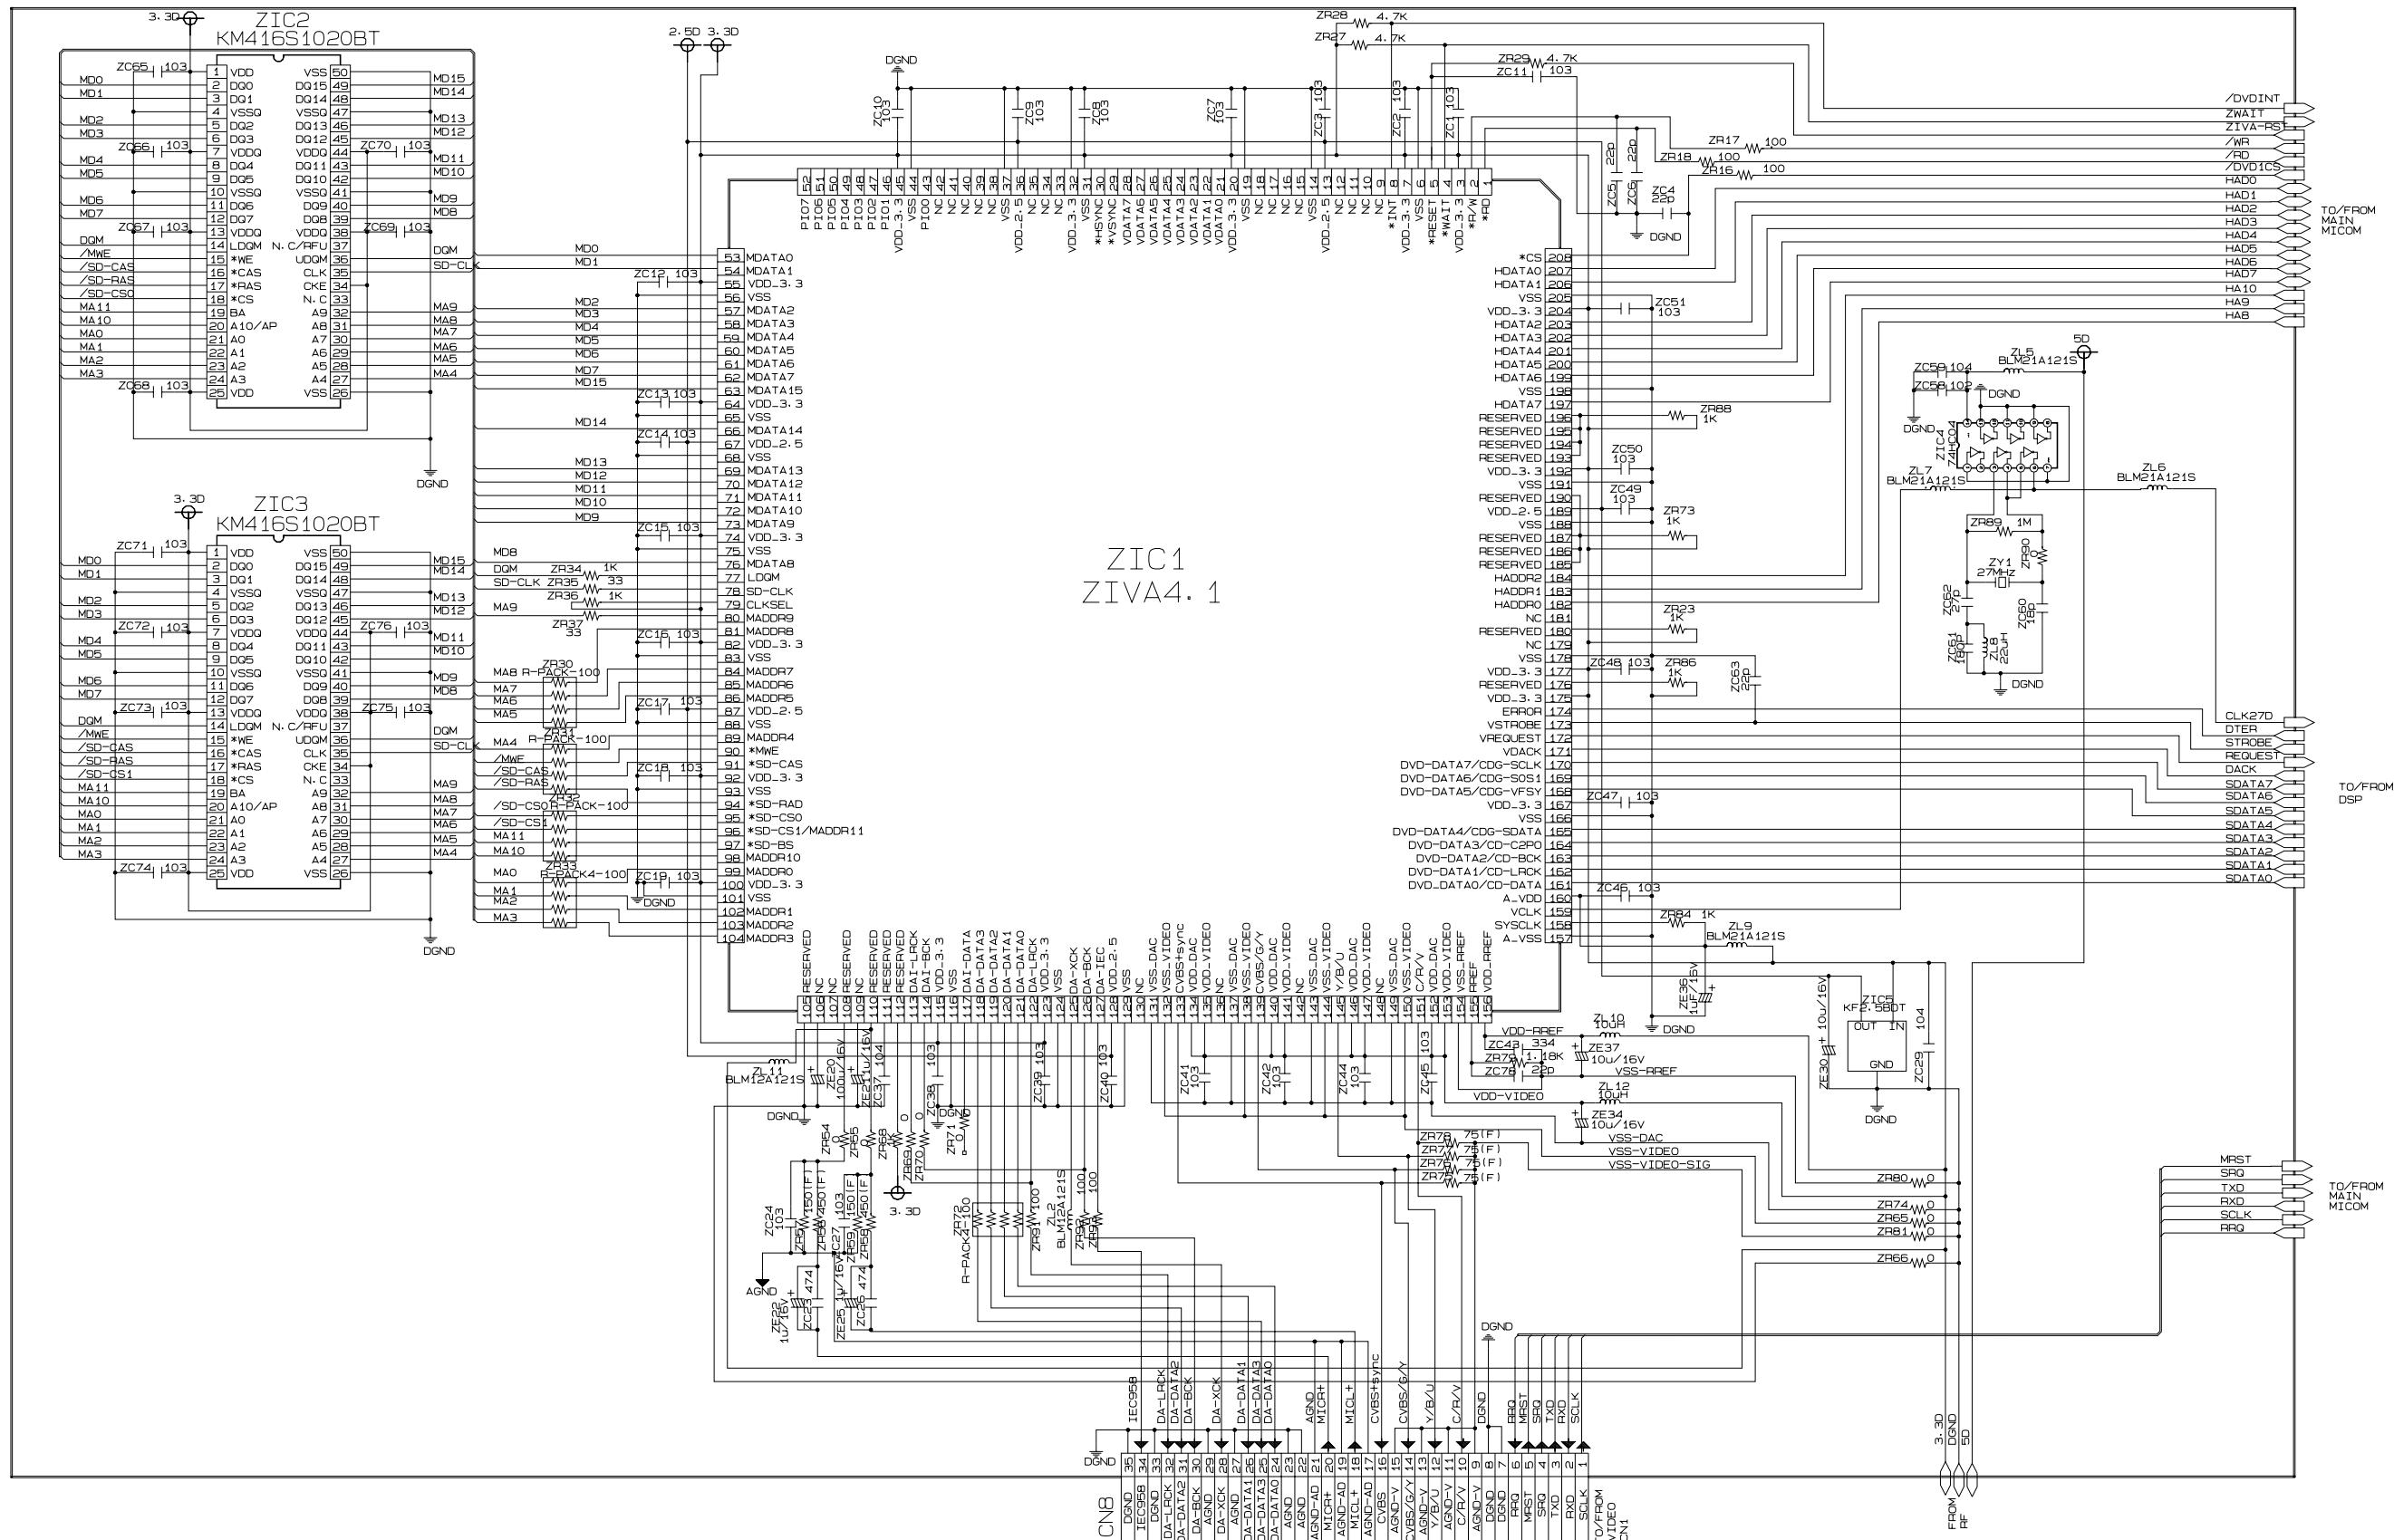


12-8 DSP

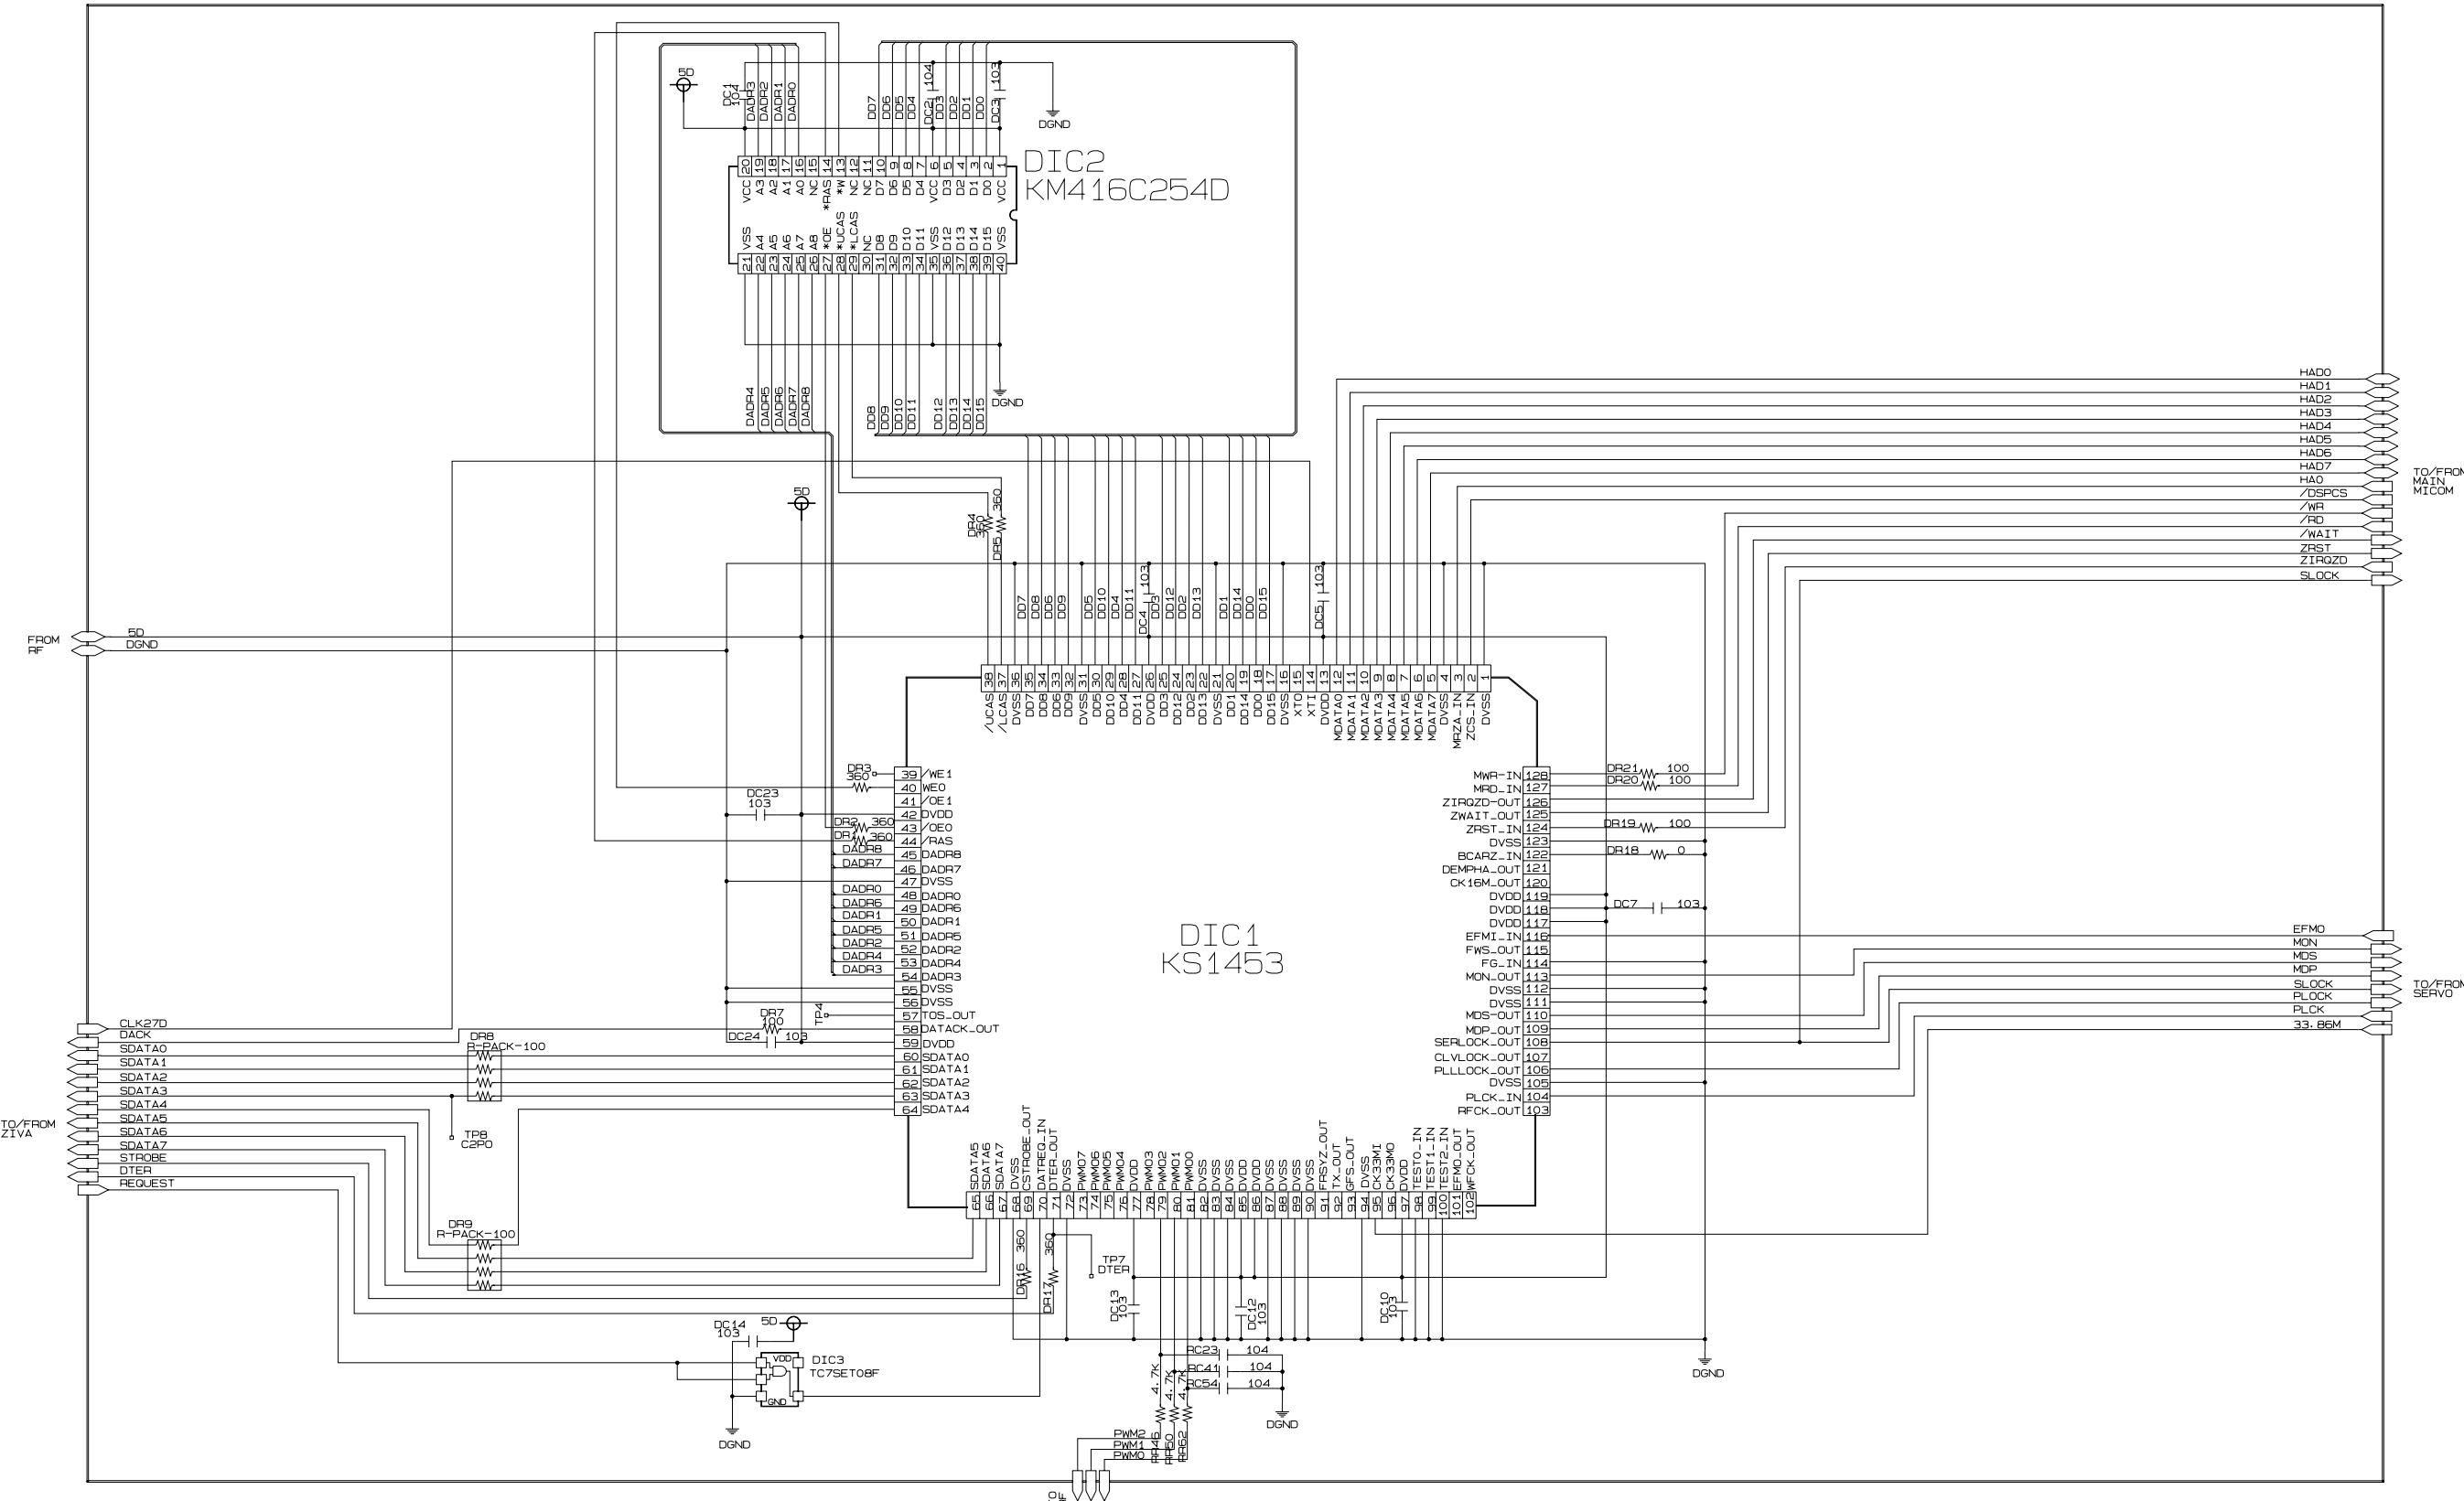


12-9 Front-Micom/VFD Display

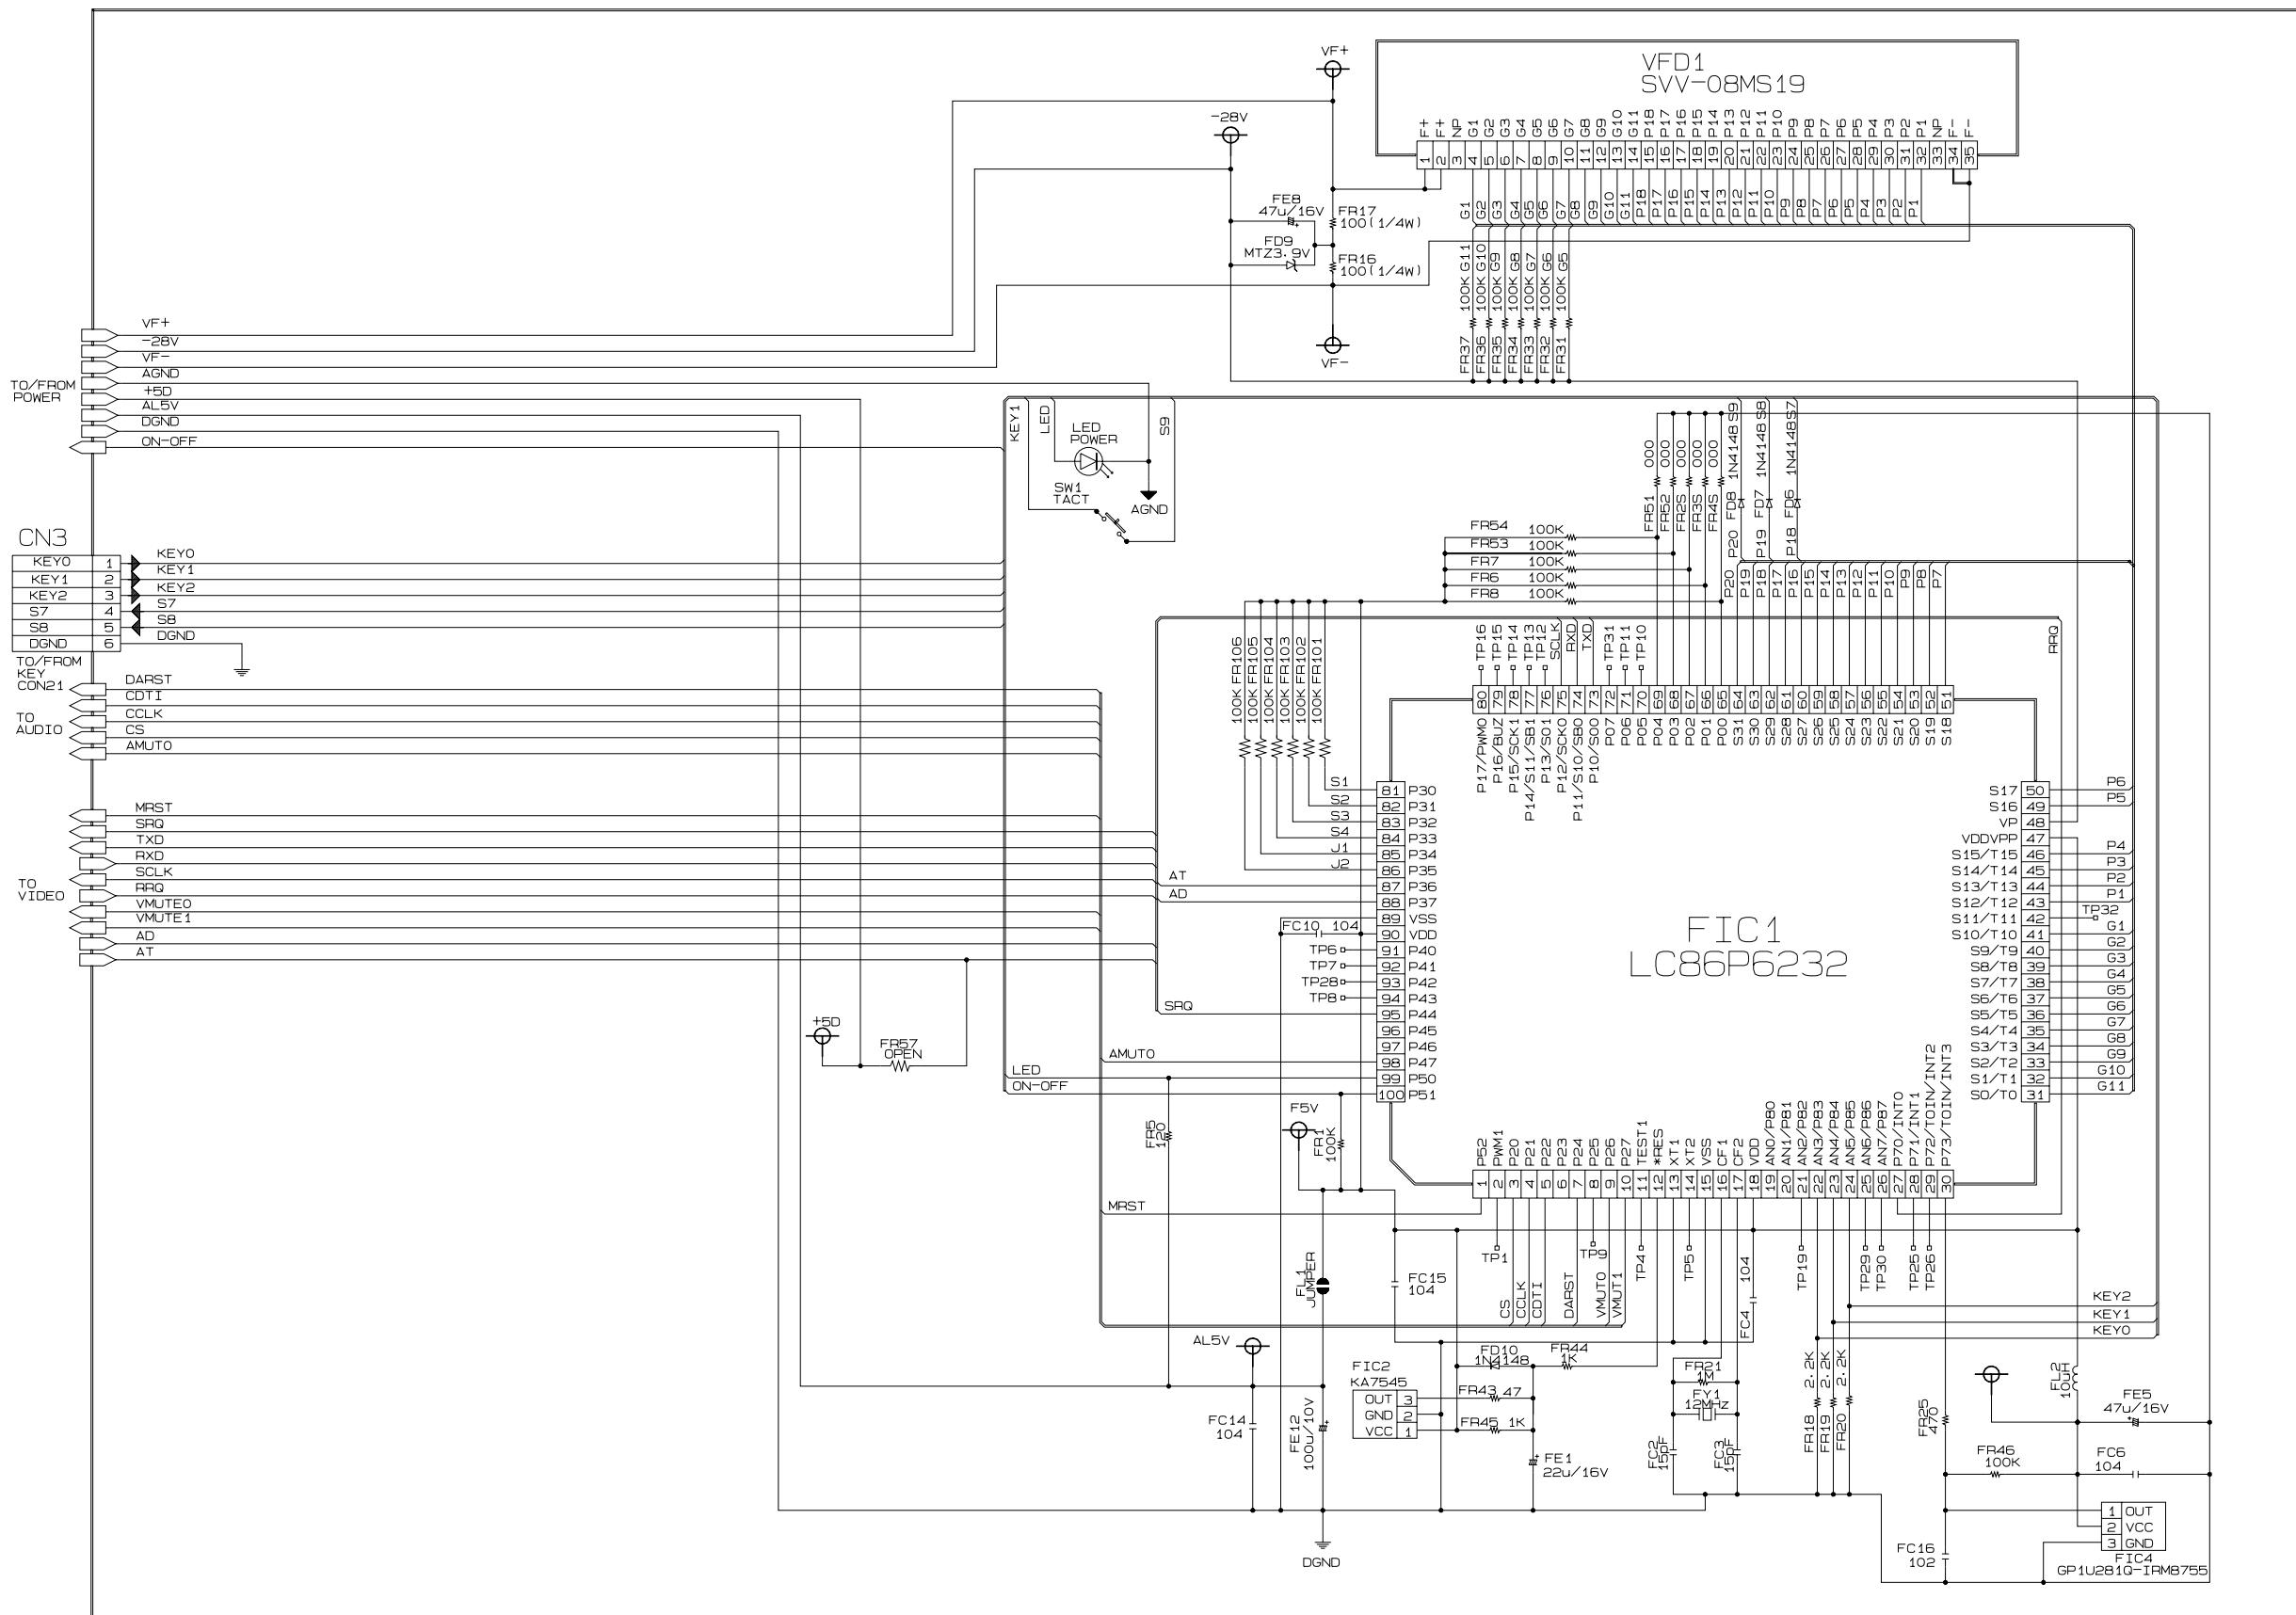


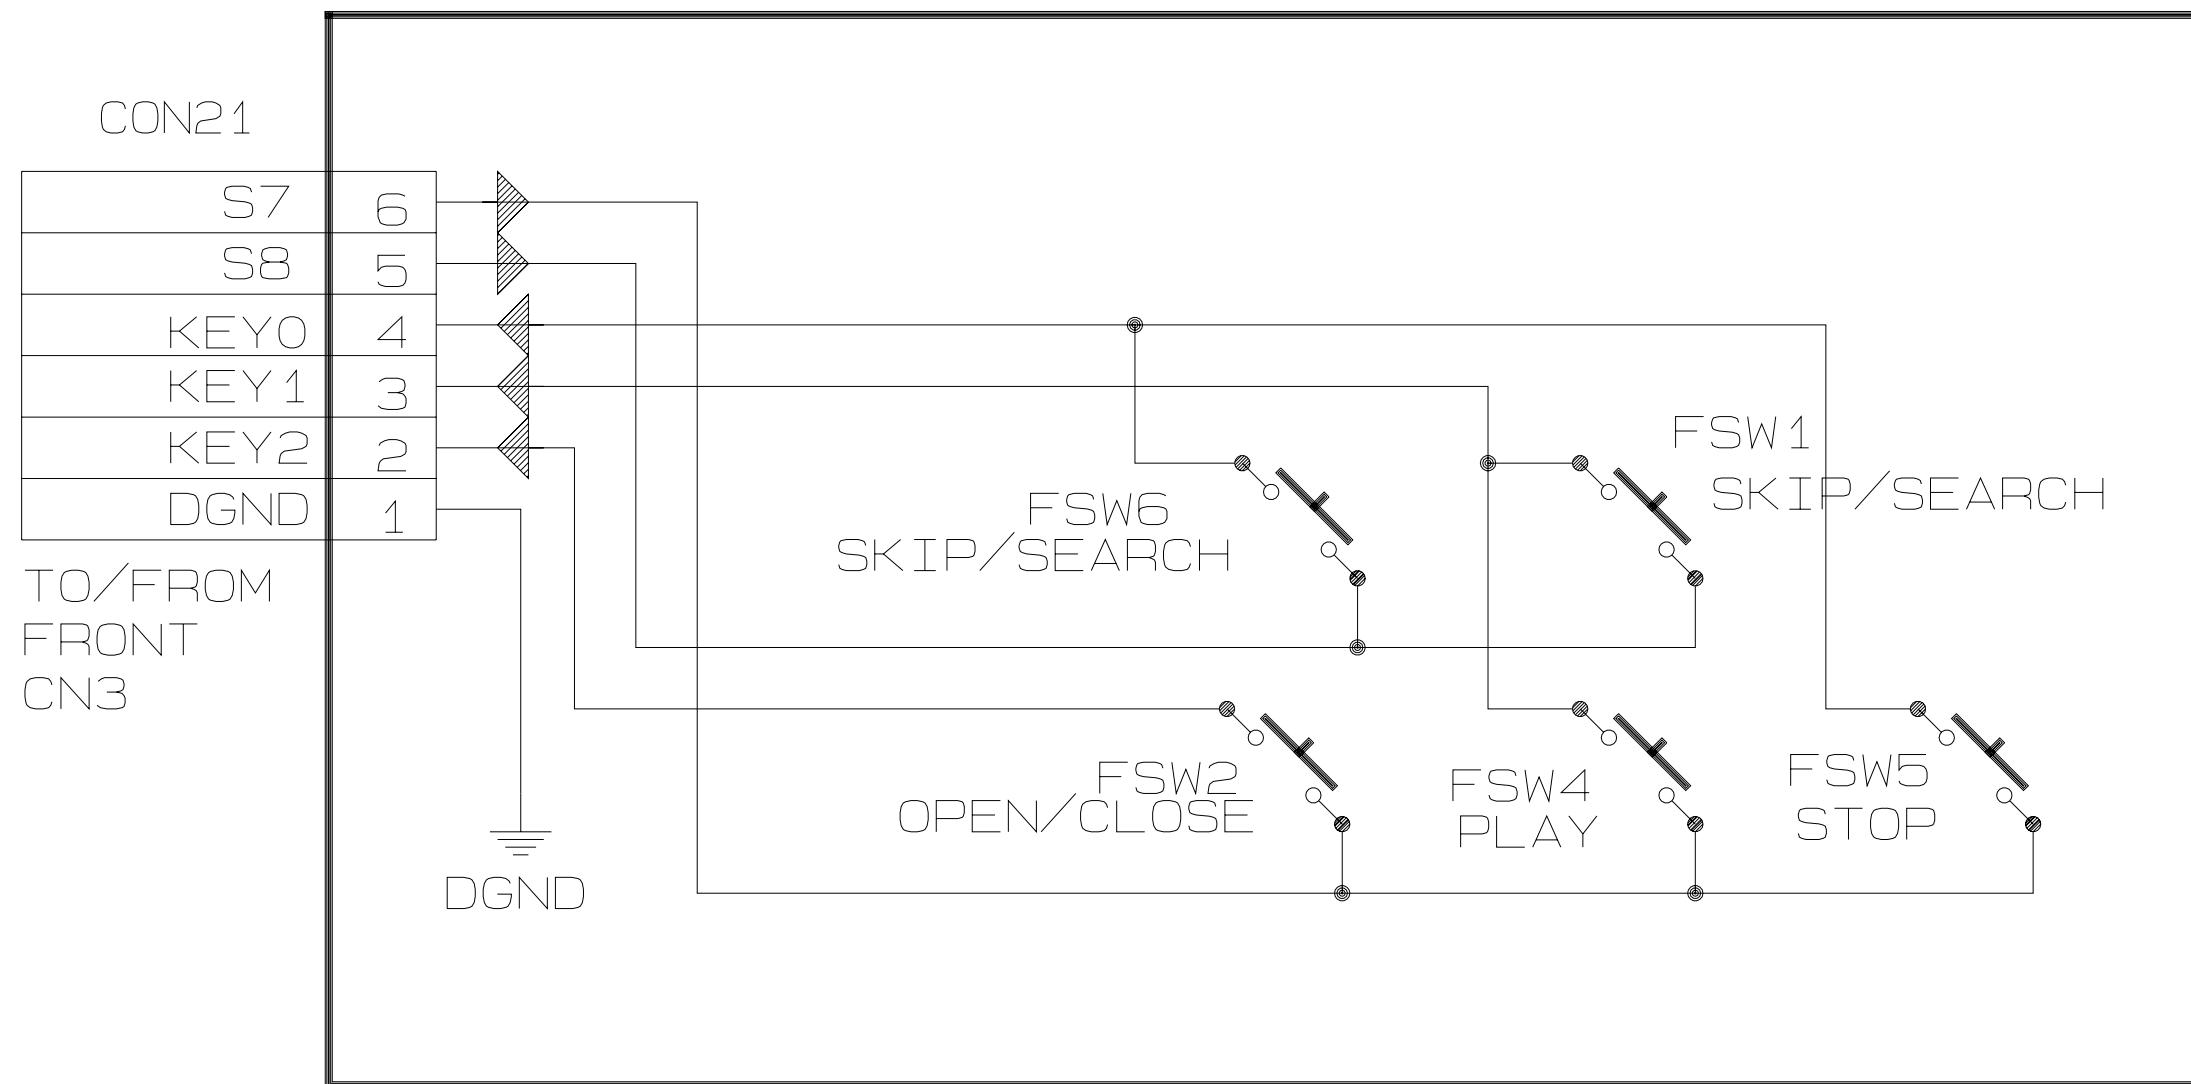12-10 Key

12-11 Deck

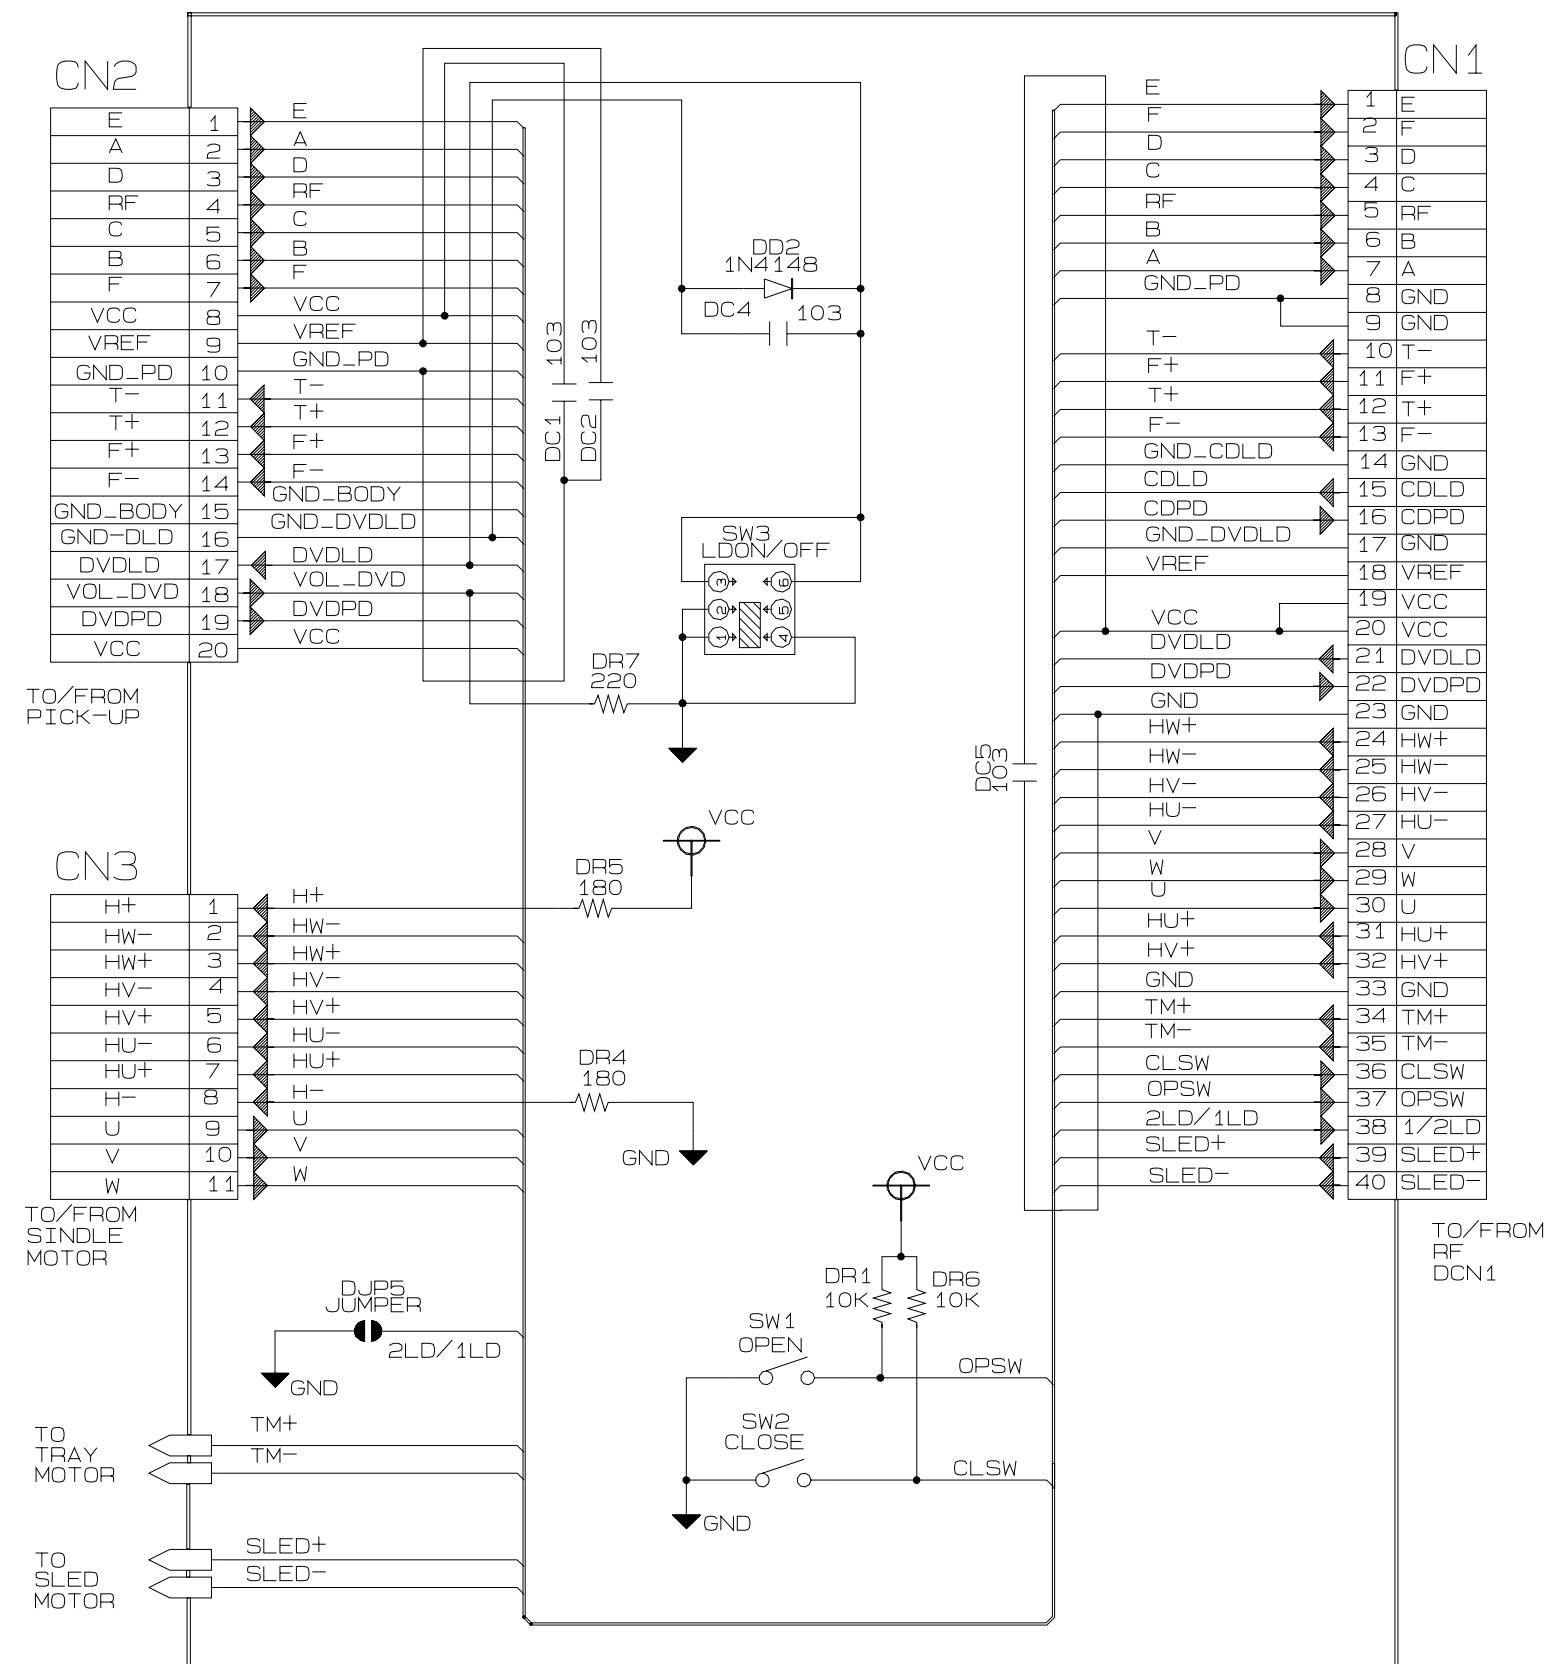

12-12 Remote Control

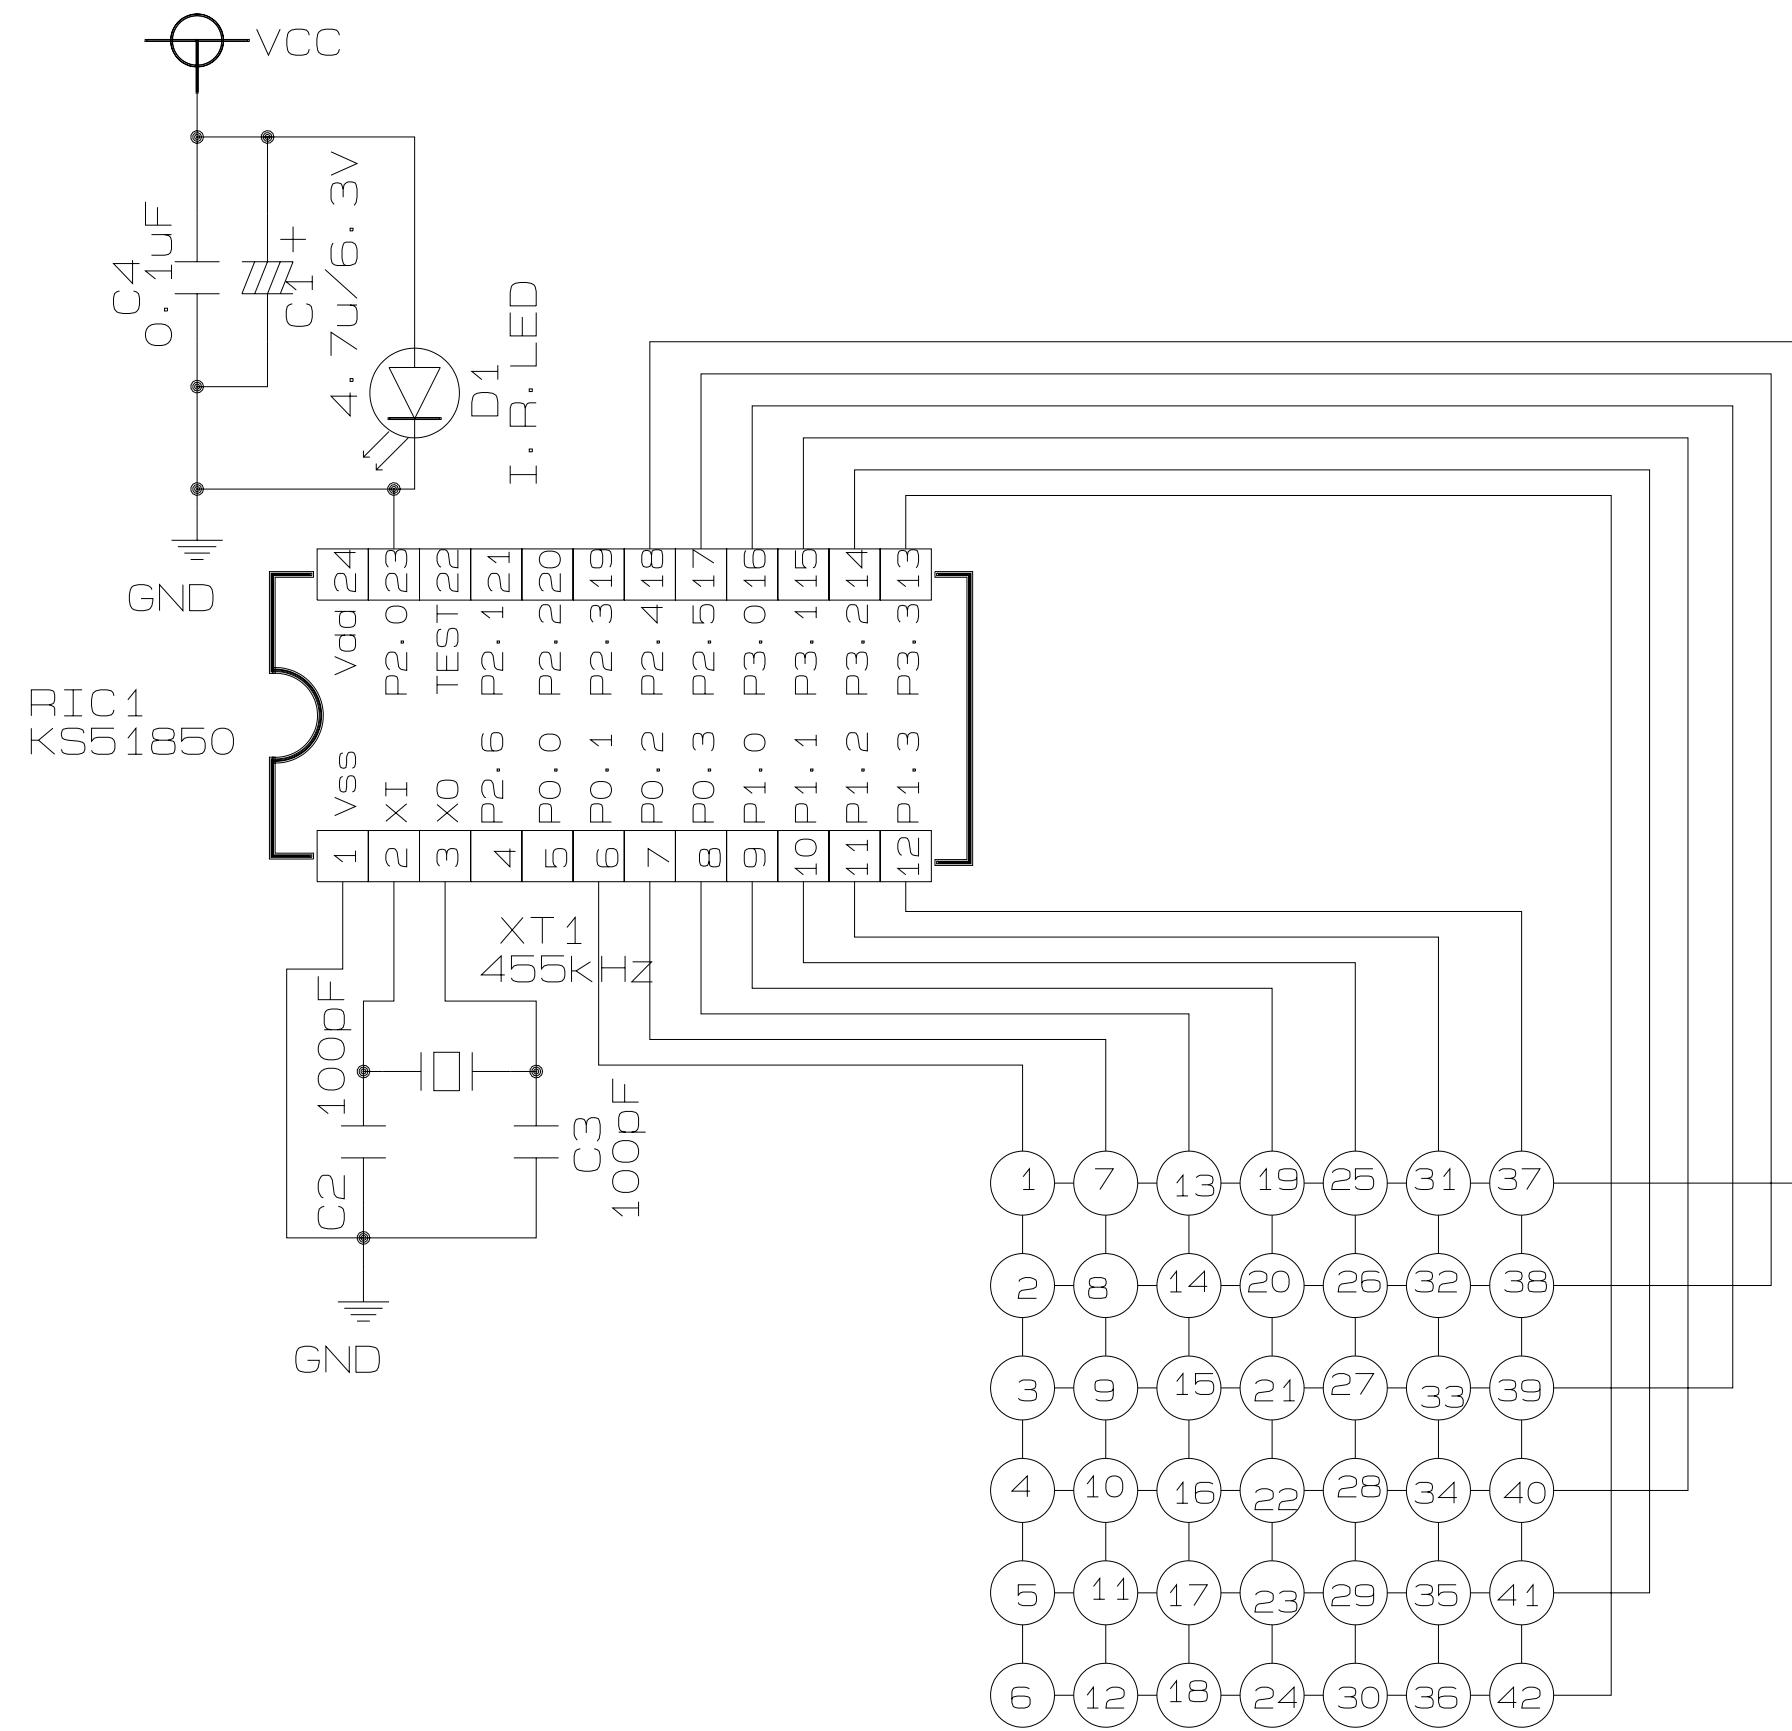

MEMO