



SAMSUNG

COLOR TELEVISION RECEIVER

Chassis : SCT57B
Model: CK569BGT1X/BWT
CK569BGT1X/VWT

SERVICE *Manual*

COLOR TELEVISION RECEIVER



CONTENTS

1. Precautions
2. Specifications and IC Data
3. Disassembly and Reassembly
4. Alignment and Adjustment
5. Troubleshooting
6. Exploded View and Parts List
7. Electric Parts List
8. Block Diagram
9. PCB Layout Diagram
10. Wiring Diagram
11. Schematic Diagrams



ELECTRONICS

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.
2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.
3. Make sure that there are no cabinet openings through which people--particularly children--might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANSI C101.1, *Leakage Current for Appliances*), and Underwriters Laboratories (*UL Publication UL1410, 59.7*).
5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

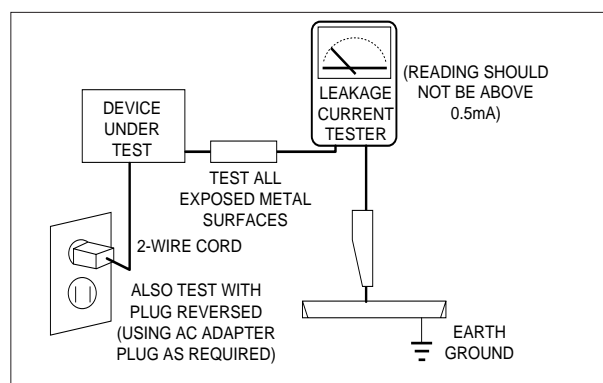


Fig. 1-1 AC Leakage Test

6. Antenna Cold Check:
With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.
7. X-ray Limits:
The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.
8. High Voltage Limits:
High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced. (X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

Heed the high voltage limits. These include the *X-ray Protection Specifications Label*, and the *Product Safety and X-ray Warning Note* on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.
10. Design Alteration Warning:
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.
11. Hot Chassis Warning:
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.
12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, *regardless of the AC plug polarity*. These units can be safely serviced *only* if an isolation transformer inserted between the receiver and the power source.
13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.
14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.
15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.
16. Picture Tube Implosion Warning:
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.
17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.
18. Product Safety Notice:
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

Components that are critical for safety are indicated in the circuit diagram by shading, () or (\triangle). Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications. A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

WARNING1: First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.

WARNING2: An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.
2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.
3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.
5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.
8. Always connect a test instrument's ground lead to the instrument chassis ground *before* connecting the positive lead; always remove the instrument's ground lead last.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor ("solid state") devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
2. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power--this is an electric shock precaution.)
3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.
4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.
5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.
6. Use only an anti-static solder removal device. Many solder removal devices are not rated as "anti-static"; these can accumulate sufficient electrical charge to damage ESDs.
7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

2. Specifications and IC Data

2-1 Specifications

Television System:

MODEL	SYSTEM
CI	PAL-I (UHF)
CII	PAL-I (VHF/UHF)
CX	PAL-B/G, SECAM-B/G
CK	PAL-B/G, D/K, SECAM-B/G, D/K
CW	PAL-B/G, D/K, SECAM-B/G, D/K, NT 4.43
CS	PAL-B/G, D/K, SECAM-B/G, D/K, NT4.43, NT3.58

Channels:

System Band	PAL/SECAM-B/G,I	PAL, SECAM- D/K	SECAM-K1, PAL-D	NTSC - M
VHF	2 - 12	1 - 13	2 - 9	2 - 13
UHF	21 - 69	21 - 69	13 - 57	14-69

Intermediate Frequencies (MHz) :

SYSTEM IF Carrier Frequency	PAL/ SECAM- B/G	PAL/SECAM-D/K, SECAM-K1	PAL - I	NTSC - M
Picture IF Carrier	38.90	38.90	38.90	38.90
Sound IF Carrier	33.40	32.40	32.90	34.40
Color Sub Carrier	34.47	34.47	34.47	35.32

Picture Tube:

14 Inch	A34KQV42X	Quick start, in-line-gun, Black stripe, 90° degree deflection
20 Inch	A48KRD82X	
22 Inch	A53QCA891X	

Power Requirements:

AC 100 ~ 260V, 50/60Hz or AC 160 ~ 260V, 50/60Hz

Antenna Input Impedance:

VHF, UHF : Telescopic dipole antenna (75 ohm unbalanced type)

Speaker Impedance

10W + 10W/8 ohm, 3W/16 ohm, 5W + 5W/16 ohm

2-2 IC Line Up


Loc No.	No.	Specification	Description	Remarks
HIC101	1	PAP102T	IF PRE-AMP	
IC202	2	TDA8844	PAL-B/G, SECAM-B/G, NTSC, SECAM-L	
		TDA8843	PAL-B/G, SECAM-B/G, SECAM-L	
		TDA8375A	PAL-B/G, SECAM-B/G, NTSC, SECAM-L, E/W ADJ.	
		TDA8375	PAL-B/G, SECAM-B/G, NTSC, SECAM-L, E/W ADJ., 16:9	
IC301	3	TDA8350Q	VERTICAL DEFLECTION AMP	
IC401	4	KA7812	REGULATOR (12V)	
IC501	5	TDA6107Q	RGB DRIVE AMP	
IC601	6	TDA7297	SOUND-AMP (10W+10W)	
IC701	7	TDA9859	AUDIO PROCESSOR	
IC801	8	KA3S0680	POWER IC 6A, 800V	
		KA3S0880	POWER IC 8A, 800V	
IC802	9	LTV817B	PHOTO COUPLER	
IC803	10	KA78R05	REGULATOR IC	
IC804	11	KA7630	REGULATOR (5V, 8V)	
ICT01	12	SAA5281 P/E SAA5281 P/H	TTX-DECODER	RUSSIAN
IC901	13	SZM-199EA SZM-199ER	μ-com	
IC902	14	AT24C04 AT24C08	E ² -PROM	
ICA01	15	TDA9840	SOUND PROCESSOR	SOUND MODULE
ICA02	16	TDA9820	INTER-CARRIER SOUND DEMODULATOR	SOUND MODULE
IC6001	17	TDA9874H	NICAM+A2 SOUND DEMODULATOR	SOUND MODULE
ICL101	18	TDA9177	Y.U.V TRANSIENT IMPROVEMENT PROCESSOR	

Option: OSD Language


Loc No.	Specification	Description	Remarks
IC901	SZM-199EA	ENG/ARAB/FRENCH	
	SZM-199EC	ENG/CHINESE	
	SZM-199EW	ENG/CRO/BUL/POLISH/RUMANIAN/CZECH/CRO	
	SZM-199EE	ENG/GER/FRENCH/SPANISH/SWEDISH/DUTCH/ITALIAN	
	SZM-199ET	ENG/MAL/IND/VIETNAMESE/THAI	
	SZM-199ER	ENG/RUSSIAN	

2-3 Semiconductor Base Diagrams


ELECTROLYTIC-
CONDENSER



DIODE




IC




TDA4665(Pin 16)
TDA837X(Pin 56)
Z8933112PSC(Pin 42)
X24CO4P(Pin 8)
TDA8395(Pin 16)
TDA4665(Pin 16)

TRANSISTOR

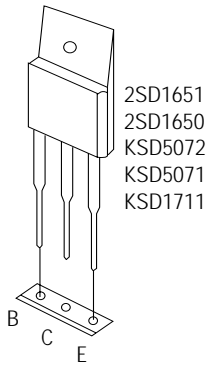


2SD1651
2SD1650
KSD5072
KSD5071
KSD1711

TRANSISTOR




KSA815-Y
KSA539-Y

IC




UPC574J
or
KA33V

SAW-FILTER




G1962
K2950M
K9253M

IC

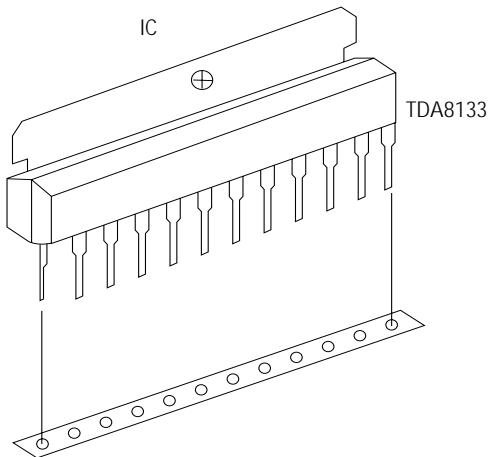


TDA8133

TRANSISTOR



KA7812

TRANSISTOR




KSR1012
KSR1010
KSR2010


Fig.2-1 Semiconductor Base Diagrams

3. Disassembly and Reassembly


3-1 Back Cover Removal

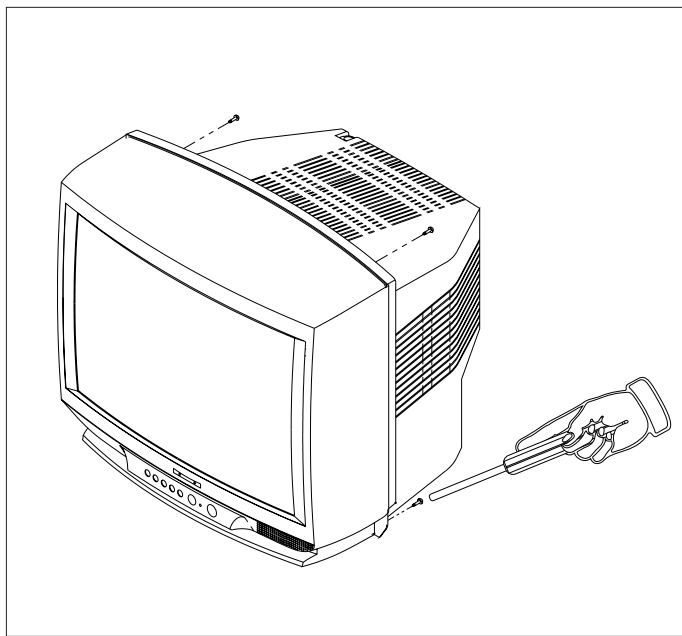



1. After removing the 9 screws, pull the cabinet backwards.

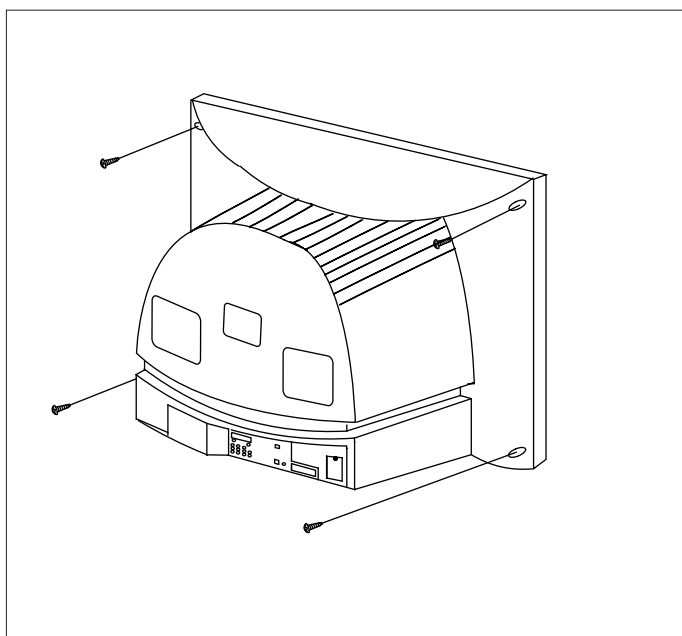


3-2 Speaker Removal

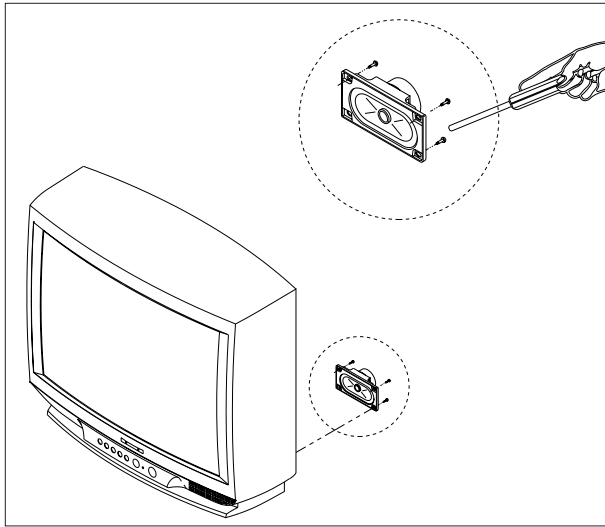

1. Loosen the 4 screws and remove the holder - speakers.

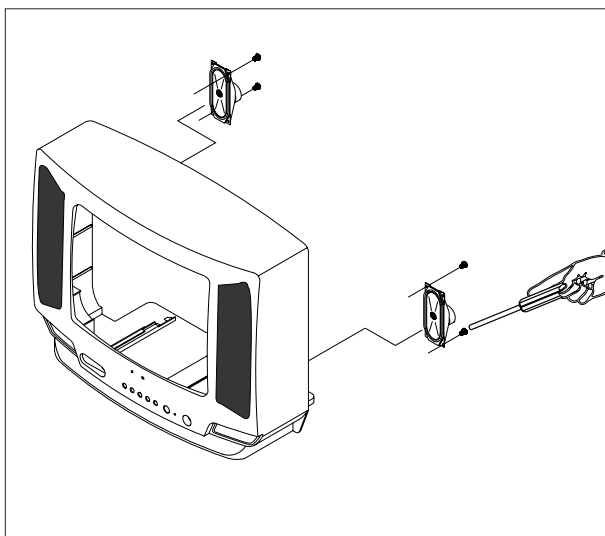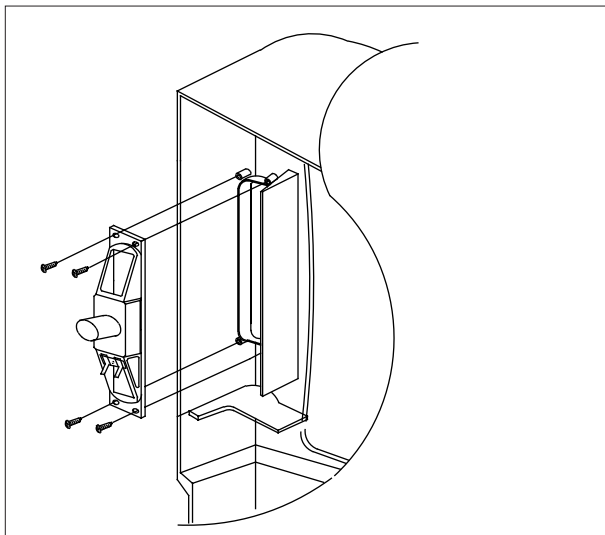

3-3 CRT Removal

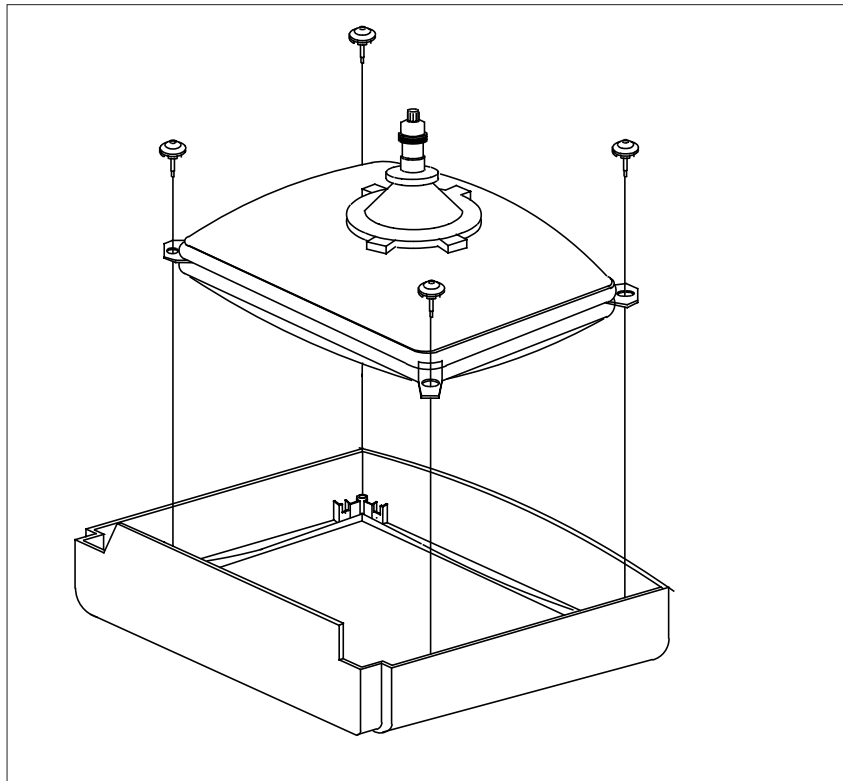

1. Spread a soft mat on the floor. Place the TV set face down.
2. Remove the 4 screws mounting the CRT to the front cabinet.
3. Lift the CRT.

MEMO

4. Alignment and Adjustments

4-1 Preadjustment

4-1-1 Factory Mode

1. Do not attempt these adjustments in the Video Mode.
2. The Factory Mode adjustments are necessary when either the EEPROM (IC902) or the CRT is replaced.
3. Do not tamper with the "Adjustment" screen of the Factory Mode menu. This screen is intended only for factory use.

4-1-2 When EEPROM (IC902) Is Replaced

1. When IC902 is replaced all adjustment data revert to initial values. It is necessary to re-program this data.
2. After IC902 is replaced, warm up the TV for 10 seconds

4-1-3 When CRT Is Replaced

1. Make the following adjustments AFTER setting up after setting up purity and convergence:
 - White Balance
 - Sub-Brightness
 - Vertical Center
 - Vertical Size
 - Horizontal Size
 - Fail Safe (This adjustment must be the last step.)
2. If the EEPROM or CRT is replaced, set PSL and PVA to 15 and 63 (Factory Mode).

4-2 Factory/Service Mode

4-2-1 Procedure for the "Adjustment" Mode

1. This mode uses the standard remote control. The Service Mode is activated (1) by pressing the (Display → (FACTORY) service key or (2) by entering the following remote-control sequence:

STAND-BY → DISPLAY → P-STD → MUTE → POWER ON
2. The "SERVICE (FACTORY)" message will be displayed. The Service Mode has four components: Adjustment, Test Pattern, Option Bytes and Reset.
3. Access the Adjustment Mode by pressing the "VOLUME" keys (Up or Down). The adjustment parameters are listed in the accompanying table. Select them by pressing the CHANNEL keys (▲, ▼).
4. Selection sequences for the PAL system:

DOWN or UP key:

VCO>SBT>SCT>SCR>SC>RG>CDL>STT>LCO
>LA>PSL>PVS>PVA>PHS>PEW>PEP>PEC>P
ET>LSC>TSC>SA>NSL>NVS>NVA>NHS>NE
W>NEP>NEC>NET
5. Selection sequences for the NTSC system:

DOWN or UP key:

NVS>NVA>NSL>NHS>NEW>NEP>NEC>NET
6. The VOLUME keys increase or decrease the adjustment values, (stored in the non-volatile memory when Adjustment Mode is cancelled).
7. Cancel the Adjustment Mode by re-pressing the "Factory" or "Power on" keys.

4-2-2 Main Adjustment Parameter

Table 4-1 Main Adjustment Parameter (Zilog μ -com)				
FUNCTION	OSD ABBREVIATION	RANGE	ADJUSTMENT DATA	INITIAL
AUTO GAIN CONTROL	AGC	0 ~ 63 STEP	15	15
VOLTAGE CONTROLLED OSCILLATOR	VCO	0 ~ 127 STEP	60 ~ 75	63
SUB BRIGHT	SBT	0 ~ 23 STEP	6 ~ 10	7
SUB CONTRAST	SCT	0 ~ 23 STEP	7	7
SUB COLOR	SCR	0 ~ 23 STEP	15 FIXED	15
S-CORRECTION	SC	0 ~ 63 STEP	11 FIXED	11
RED DRIVE (GAIN)	RG	0 ~ 7 STEP	25 ~ 45	31
BLUE DRIVE (GAIN)	BG	0 ~ 127 STEP	25 ~ 45	31
CATHODE DRIVE LEVEL	CDL	0 ~ 9 STEP	-	4
SUB TINT	STT	0 ~ 63 STEP	0 ~ 10	5
SECAM-L CONTROLLED OSCILLATOR	LCO	0 ~ 63 STEP	63 FIXED	63
SOUND LEVEL ADJUSTMENT	LA	0 ~ 63 STEP	5	5
PAL VERTICAL SLOPE	PSL	0 ~ 63 STEP	20 ~ 25	25
PAL VERTICAL SHIFT	PVS	0 ~ 63 STEP	25 ~ 35	31
PAL VERTICAL AMPLITUDE	PVA	0 ~ 63 STEP	35	31
PAL HORIZONTAL SHIFT	PHS	0 ~ 63 STEP	35 ~ 45	40
PAL EW-WIDTH	PEW	0 ~ 63 STEP	35 ~ 45	38
PAL EW-PARABOLA	PEP	0 ~ 63 STEP	0 ~ 10	22
PAL EW CORNER PARABOLA	PEC	0 ~ 63 STEP	15 ~ 30	22
PAL EW-TRAPEZIUM	PET	0 ~ 63 STEP	15 ~30	30
VERTICAL SCROLL	VSC	0 ~ 63 STEP	31 FIXED	25
TTX SUB CONTRAST	TSC	0 ~ 63 STEP	10 ~ 30	15
SEPARATION ADJUSTMENT	SA	0 ~ 49 STEP	25	25
NTSC VERTICAL SLOPE	NSL	0 ~ 63 STEP	25 FIXED	25

Table 4-1 Main Adjustment Parameter (Zilog μ -com)(Continued)				
FUNCTION	OSD ABBREVIATION	RANGE	ADJUSTMENT DATA	INITIAL
NTSC VERTICAL SHIFT	NVS	0 ~ 63 STEP	35 ~ 45	44
NTSC VERTICAL AMPLITUDE	NVA	0 ~ 63 STEP	25 ~ 35	28
NTSC HORIZONTAL SHIFT	NHS	0 ~ 63 STEP	35 ~ 50	45
NTSC EW-WIDTH	NEW	0 ~ 127 STEP	35 ~ 45	37
NTSC EW PARABOLA	NEP	0 ~ 63 STEP	15 ~ 30	21
NTSC EW-CORNER PARABOLA	NEC			20
NTSC EW-TRAPEZIUM	NET			30

NOTE : PVS,PVA, PHS, NVS, NVA,NHS parameters must be aligned using both the 50Hz and 60Hz vertical-field rates.

4-2-3 Test Pattern

1. This mode can be used during servicing, or for confirming that the convergence and purity adjustments are correct.
2. Access the Test Pattern parameters by pressing a CHANNEL keys (\blacktriangle , \blacktriangledown) while the Service Mode is on. The cursor will move to the test pattern. Press the VOLUME keys. On-screen display:

- RED
- GREEN
- BLUE

3. AGING Mode (Reference Only)

This pattern is used for pre-heating the CRT during manufacturing--it is accessed in the factory by twice pressing the "HIDDEN" key .

Even if the TV power is cut off, the Aging Mode is not cancelled, The patterns are displayed at 5 sec intervals. The AGING mode is cancelled by repressing the "HIDDEN" key.

4-2-4 MICOM Option Byte Table

BYTE	BIT	LOW			HIGH			REMARK	
B Y T E 0	D7	D7	D6	Middle East / Arab	South East / Asia	China	Western/Eastern	CIS	
		0	0	English/Arabian	English/Thai	English/Chinese	English/German/French/Spanish/Italian/Swedish/Dutch	-	
	D6	0	1	English/Arabian/French	English/Vietnamese	-	English/Hungarian/Polish/Rumanian/Czech/Croatian	English/Russian	
		1	0	English/French	English/Malay	English	English/French	-	
		1	1	English Only	English/Malay/Indonesian	-	English	English	
	D5				Auto On			Last Status	
	D4	SYSTEM						TABLE 1	
	D3								
	D2								
	D1	WITH CHILD LOCK			WITHOUT CHILD LOCK			FOR MIDDLE EAST	
D0	NO TTX (ATS = ON)			TTX (ATS=OFF)					
B Y T E 1	D7	WITHOUT PIP			WITH PIP				
	D6	NOISE REDUCTION OFF(ALWAYS)→OSD NO DISPLAY (TDA8842)			NOISE REDUCTION ON/OFF FUNCTION MENU DISPLAY (TDA8844)				
	D5	SCART : CH UP/DOWN FUNCTIONED			RCA : NOT CH UP/DOWN FUNCTIONED				
	D4	D4	D3	D2	TV	AV			■ NORMAL MODE E/W DATA=PLUS + 9 ■ PLUS MODE PHS DATA= PLUS - 1 (PAL/NT)
		0	0	0	PLUS→NORMAL	PLUS→NORMAL			
	D3	0	0	1	PLUS→NORMAL→ZOOM→16:9	PLUS→NORMAL→ZOOM			
		0	1	0	NORMAL→ZOOM→16:9	NORMAL→ZOOM→16:9			
	D2	0	1	1	NORMAL→ZOOM→16:9	NORMAL→ZOOM			
		1	0	0	NORMAL→ZOOM	NORMAL→ZOOM			
	D1	D1	D1	D0	SYSTEM	REMARK			1) SOUND SYSTEM DURING THE AUTO SEARCH 2) SOUND SYSTEM DURING THE FACTORY MODE RESET 3) MANUAL SEARCH (SYSTEM DOES NOT MATTER)
0			0	B/G	"MEMORY" BY PROGRAM CHANNELS REQUIRED				
0		1	D/K						
D0		1	0	I					
	1	1	B/G & D/K & M						
OTHER	1) HIGH FOR XA/XB (ALWAYS) : CRYSTAL 3.58MHz/4.43MHz CONSTANT 2) AUDIO MUTE DURING NO SIGNAL (ALWAYS) 3) SET THE CONTRAST TO 90 IN THE STANDARD PICTURE								

4-2-4 MICOM Option Byte Table

BYTE	BIT	LOW		HIGH		REMARK	
B Y T E O	D7	D7	D6	SYSTEM	IC	A/V	
		0	0	STEREO + NICAM	TDA9859 /TDA9874	SCART + FRONT RCA	
		0	1	STEREO	TDA9859 / TDA9840		
		D6	1	0	LINE STEREO	TDA9859	
	1		1	MONO	TDA8844	1 SCART/RCA	
	D5	WITHOUT TDA9178			WITH TDA9178		FOR EUROPE CIS
	D4	-			NICAM ERROR CHECK BIT		
	D3	AFT-ON			AFT - OFF		INDIA ONLY
D2	TDA8375			TDA8844			
D1	RF AUDIO OUT MUTE OFF			RF AUDIO OUT MUTE ON			
D0	D/K STEREO F = 6.752			D/K STEREO F = 6.25'			
D0	CLOCK DISPLAY OFF			CLOCK DISPLAY ON		SZM-199EV ONLY	

4-2-5 TABLE 1 (SYSTEM)

BYTE 0			SYSTEM	SOUND SYSTEM		SOUND SYSTEM			
D4	D3	D2		OSD	SYSTEM	RF MODE		AV1/ AV2 MODE	
						OSD	SYSTEM	OSD	SYSTEM
1	1	1	CI	X	I	X	PAL	X	AUTO
1	1	0	CII	X	I	X	PAL	X	AUTO
1	0	1	CW	B/G→I→D/K→		AUTO→PAL→SECAM→NT4.43→		AUTO→PAL→SECAM→NT4.43→NT3.58	
1	0	0	CF	X	B/G, L/L'	X	PAL/SECAM	X	AUTO
0	1	1	CK/CX	B/G→D/K		AUTO→PAL→SECAM→NT4.43→		AUTO→PAL→SECAM→NT4.43→	
0	1	0	CB	X	B/G	X	PAL	X	AUTO
0	0	1	CS 1	B/G→I→D/K→M		AUTO→PAL→NT4.43→NT3.58→		AUTO→PAL→NT4.43→NT3.58→	
0	0	0	CS 2	B/G→I→D/K→M		AUTO→PAL→SECAM→NT4.43→NT3.58		AUTO→PAL→SECAM→NT4.43→NT3.58	

4-2-6 RESET

The Reset Mode is used during factory inspection.

Function Reset:

- | | |
|-------------|---------------------------|
| 1. Channels | Add/Erase |
| 2. Sort | Non |
| 3. Language | Basic (English) |
| 4. System | Auto (Non-TTX micom only) |

4-3 Other Adjustments

4-3-1 General

1. Usually, a color TV needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.
2. The picture should have good black and white details. There should be no objectionable color shading; if color shading is present, perform the purity and convergence adjustments described below.
3. Use the specified test equipment or its equivalent.
4. Correct impedance matching is essential.
5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.
6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
8. To protect against shock hazard, use an isolation transformer.

4-3-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set has been moved or turned in a different direction, disconnect its AC power for at least 10 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before removing power.

4-3-3 High Voltage Check

CAUTION: There is no high voltage adjustment on this chassis. The B⁺ power supply must be set to +130/155 volts. (Full color bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. The high voltage should not exceed 30KV.
4. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 30KV under any conditions.

4-3-4 FOCUS Adjustment

1. Input a black and white signal.
2. Adjust the tuning control for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

4-3-5 Screen Adjustment

1. Connect CRT socket pin RK to an oscilloscope probe.
2. Input a gray scale pattern. (Use a pattern generator, PM5518)
3. Use the P mode key (on the remote control) for the STANDARD picture.
4. Adjust the Screen VR (on the FBT) so that the voltage (See Fig.4-1.) on the oscilloscope becomes $130 \pm 2.5V$.

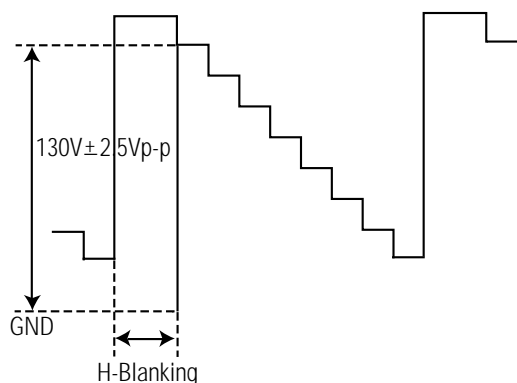


Fig. 4-1

4-3-6 Purity Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Plug in the CRT deflection yoke and tighten the clamp screw.
3. Plug the convergence yoke into the CRT and set in as shown in Fig. 4-1.
4. Input a black and white signal.
5. Fully demagnetize the receive by applying an external degaussing coil.
6. Turn the CONTRAST and BRIGHTNESS controls to maximum.
7. Loosen the clamp screw holding the yoke. Slide the yoke backward or forward to provide vertical green belt. (Fig. 4-2).
8. Tighten the convergence yoke.
9. Slowly move the deflection yoke forward, and adjust for the best overall green screen.
10. Temporarily tighten the deflection yoke.
11. Produce blue and red rasters by adjusting the low-light controls. Check for good purity in each field.
12. Tighten the deflection yoke.

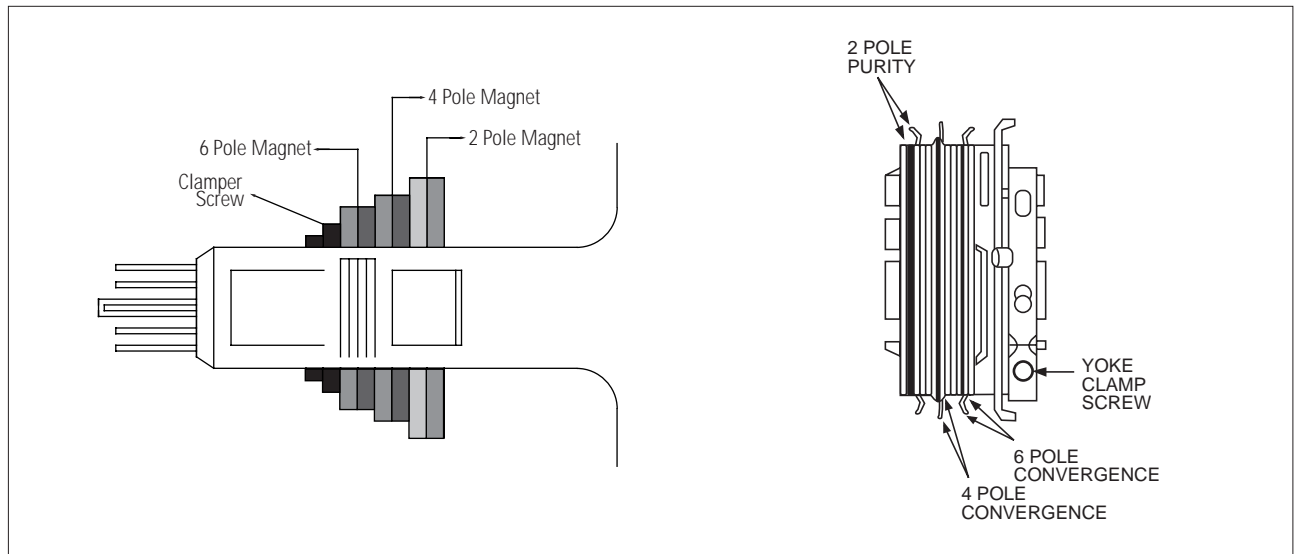


Fig. 4-2 Convergence Magnet Assembly

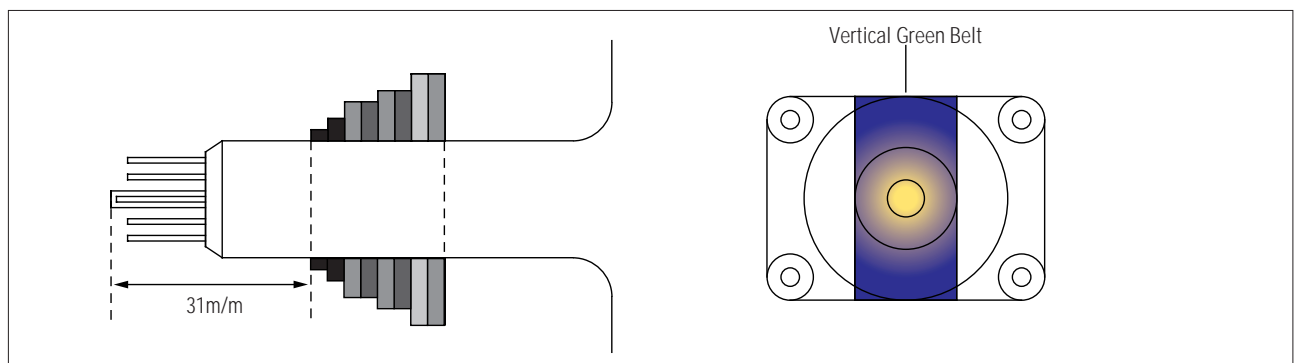


Fig. 4-3 Center Convergence Adjustment

4-3-7 White Balance Adjustment

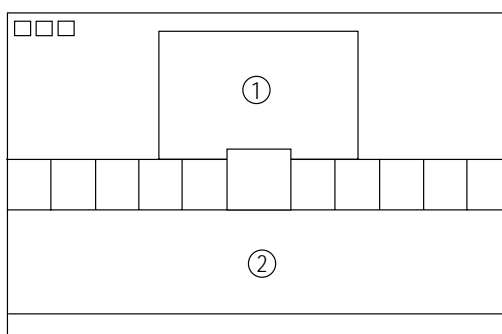


Fig. 4-4

(a) Set up

1. Warm up the TV for at least 30 minutes in the Aging Mode (Test Pattern). This mode is displayed by entering the following sequence:

DISPLAY → FACTORY (Select Test Pattern)

2. Input a Toshiba pattern.

(b) High-Light Adjustment

1. Set SCT to 50 fL in the Factory Service Mode using CA100. (See Fig. 4-4 ①)

(c) Low-Light Adjustment

1. Set SBT to 1.2 fL in the Factory Service Mode using CA100. (See Fig. 4-4 ②)

4-3-8 Center Convergence Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Adjust the Brightness and Contrast controls for a well defined picture.
3. Adjust the two-tab pairs of the 4 pole magnets, and change the angle between them. Superimpose the red and the blue vertical lines in the center area of the screen.
4. Turn the both tabs at the same time, keeping the angle constant, and superimpose the red and blue horizontal line in the center of the screen.
5. Adjust the two-tab pairs of the 6-pole magnets to superimpose the red and blue line onto the green. (Changing the angle affects the vertical lines, and rotating both magnets affects the horizontal lines.)
6. Repeat adjustments 2~6, if necessary.
7. Since the 4-pole magnets and 6-pole magnets interact, the dot movement is complex (Fig. 4-3).



Fig. 4-5 Center Convergence Adjustment

4-3-9 VCO Adjustment

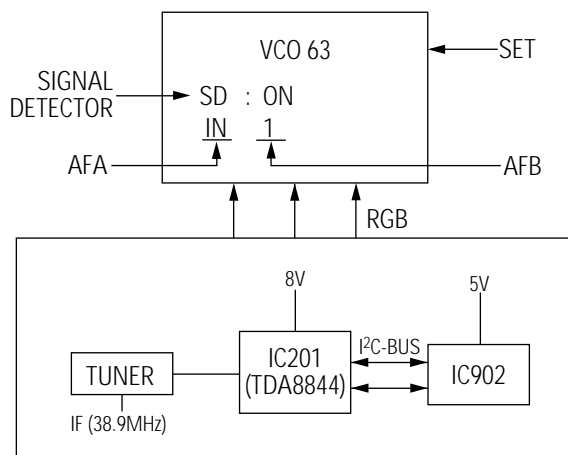


Fig. 4-6


1. Turn on the TV.
2. Set IF port of a tuner to 38.9MHz. (Use a pattern generator).
3. Input a color bar pattern(PAL-B/G system).
4. In the Factory Service Mode, select "Adjustment → VCO" and set VCO data to 63.
5. Ensure "SD On" (Signal Input) and "SD Off" (No Signal).
6. Adjust T201 (connected to TDA8844 pins3,4) so that AFA Bit is "INSIDE WINDOW" (the AFB Bit is 1).

4-3-10 RF AGC Adjustment


1. Connect a pattern generator (PM5418) RF signal to tuner RF.
2. Select a gray scale pattern and PAL-B/G system.
Set to 479.25MHz.
3. Connect IC201 (ONECHIP) pin 53 to a digital multimeter.
4. Adjust AGC (using volume keys) in the Factory Service Mode.
Set IC201 (ONECHIP) pin 54 to $3.7 \pm 0.05\text{v(DC)}$.
5. Adjust AGC within 20 seconds after power ON.

4-3-11 Geometry Adjustment (SC -> PVS -> PVA -> PSL -> PHS)


1. Input a Lion Head pattern.
2. SET the SC Data steps 10~12 in the Factory Mode.
3. Adjust with PVS (starts blinking) exactly at middle of the screen.



4. Adjustment with PVA : Top and Bottom margins of the picture are 4.



5. Adjustment with PSL : Bottom of picture to bottom of screen.




6. Adjust PHS horizontally. Center the picture.


MEMO

5. Troubleshooting


5-1 No Video (Raster On, No Sound)

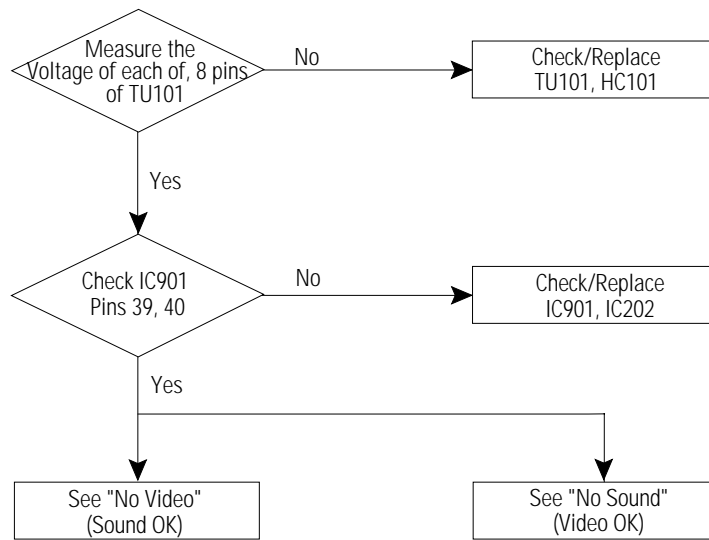


5-2 No Power

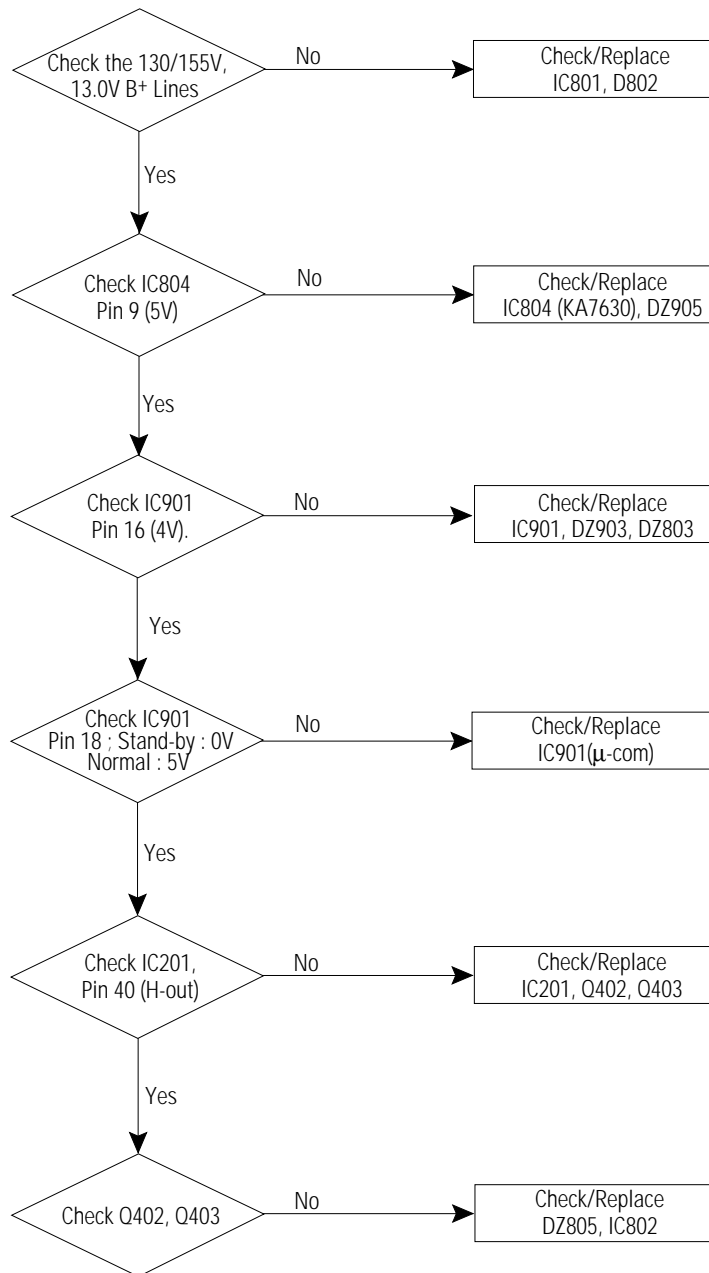

5-3 No Video (Sound OK)

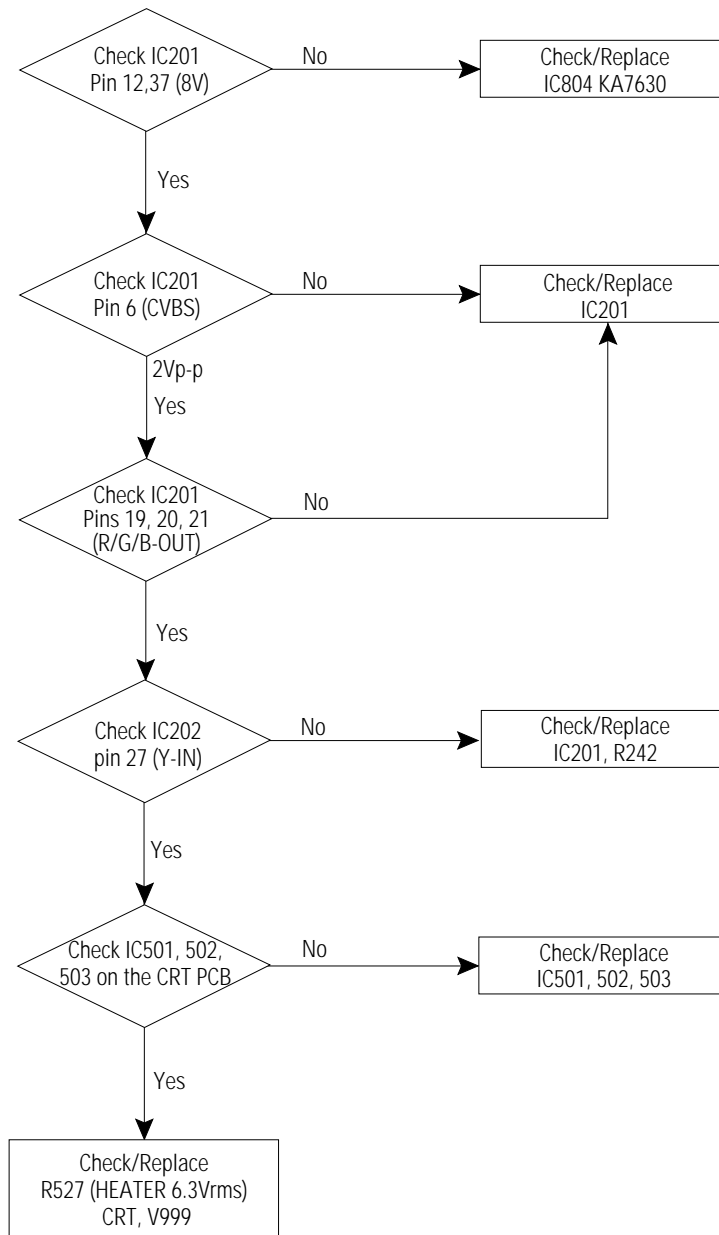


5-4 No Sound (Video OK)

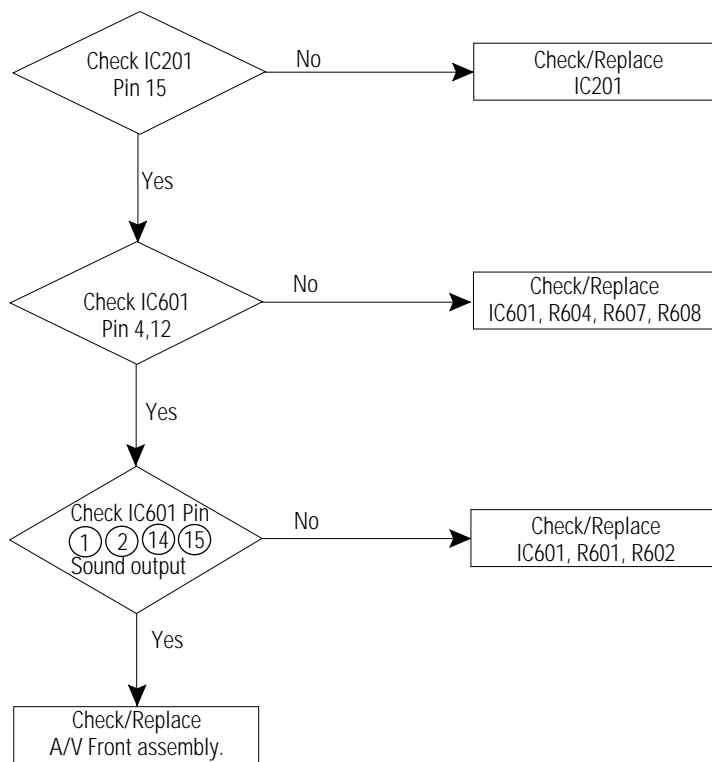

6. Exploded View & Parts List

6-1 CK569BGT1X/BWT(VWT)

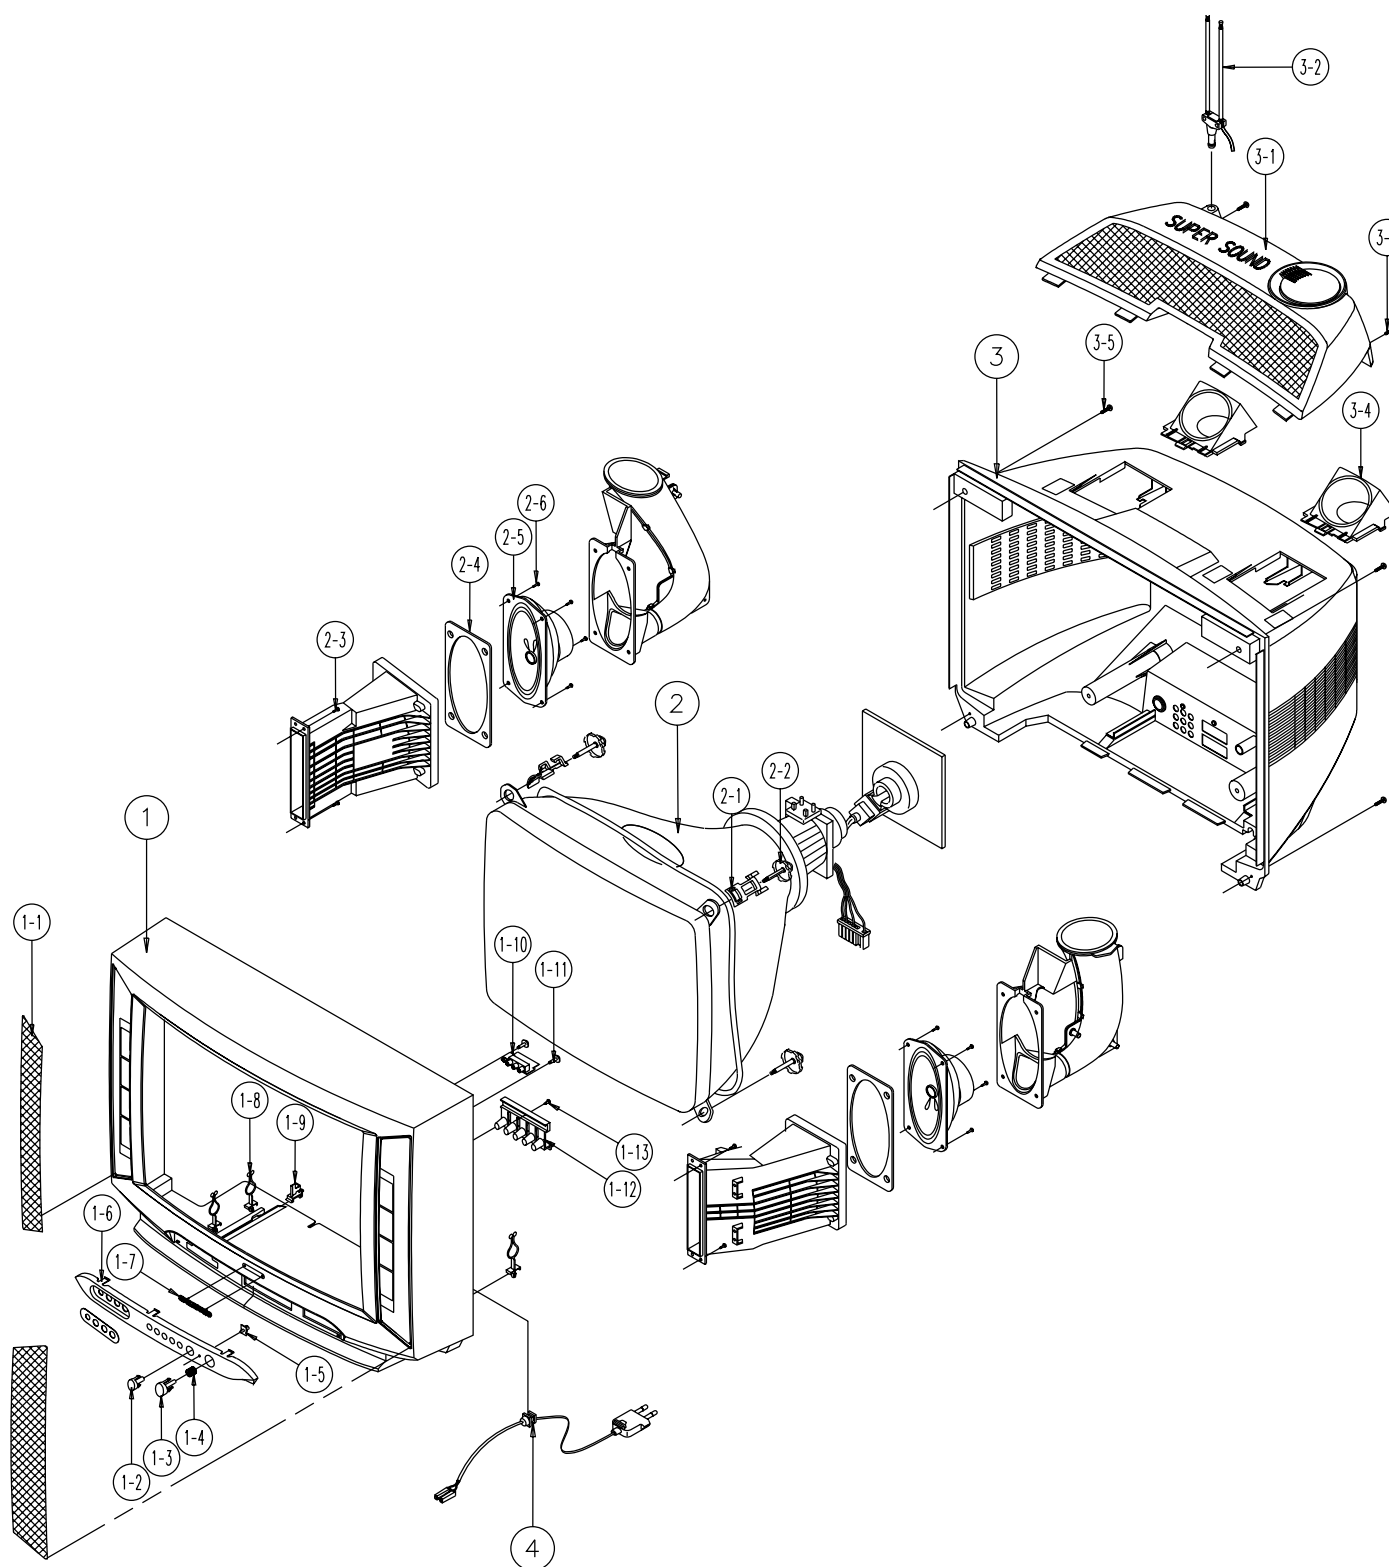

No	Code No	Description	Specification	Q'ty	Remark
1	AA91-10336J	ASSY-CABINET,FRONT	-,CK569BGTR,BK708P BWT,HB,BLK	1	
	AA64-31129E	CABINET-FRONT	-,569B,BK708P BWT,HIPS,HB,BLK,-	1	
1-1	AA63-50336A	GRILLE-WOOFER,L	-,569B,-,SECC,TO.5,BLK,-	1	
	AA63-50337A	GRILLE-WOOFER,R	-,569B,-,SECC,TO.5,BLK,-	1	
1-2	AA64-40431A	WINDOW-REMOCON	-,503E,-,ABS,HB,LG41338,-	1	
1-3	AA64-10716A	KNOB-POWER	-,566B,-,ABS,HB,MET BROWN	1	
1-4	AA61-60003T	SPRING-CS	-,SUS304,0.5,OD7,H13.5,N5,-,-,	1	
1-5	AA64-40432A	INDICATOR-LED	-,503E,-,PMMA,HB,CLR,-	1	
1-6	AA64-40466L	DECORATION-FRONT	-,CK569BGTR,KSP213 ML,HIPS,VO,	1	
1-7	AA64-70010B	BADGE-BRAND	AL,SS R2000 25,SILVER,L50,-,-,	1	
1-8	AA65-30105A	CLAMP-WIRE	NYLON 66,V2,NTR,15MM,ALL MODEL	2	
1-9	AA61-40053A	STOPPER-PCB	ALL MODEL,HIPS HB,WHT,HB,-,-	1	
1-10	AA95-40004M	ASSY-PCB,A/V	-,CS5377/MVTX,SCT12A,-,-,-	1	
1-11	AA60-10002A	SCREW-TAPPING	RH,+ ,M4,L12,ZPC(YEL)-,-,OD14	2	
1-12	AA64-10717A	KNOB-CONTROL	-,-,-,ABS,HB,MET BROWN	1	
1-13	6002-000514	SCREW-TAPPING	RH,+ ,2,M4,L15,ZPC(BLK),SWR	1	
2	AA03-10026K	CRT-COLOR	-,A53QCA891X(B),+380mG,21,90d	1	
2-1	AA65-30019A	CLAMP-D,COIL	NYLON-66,V0,NTR,DADH-460 20,-	4	
2-2	3704-000110	SOCKET-CRT	14P,29.1,25.5,SN,ISHS09S/BK	4	
2-3		ASSY-HOLDER,SPK OPTION			
2-4		ASSY-HOLDER,SPK OPTION			
2-5	AA91-60207A	ASSY-HOLDER,SPK	-,M-PP,HB,BLK/HORN,168mm,8R15W	1	
2-6	6002-000522	SCREW-TAPPING	TH,+ ,2,M4,L15,ZPC(BLK),SWRCH18	8	
3	AA64-31131C	CABINET-BACK	-,569B,-,HIPS,V2,BLK,-,-	1	
3-1	AA63-30214A	COVER-TOP,SPK	-,569B,PK708P,HIPS,HB,BLK,-,-	1	
3-2	AA42-10001V	ANT-ROD	-,3S,620mm,BRN,UL/CSA	1	
3-3	AA60-10050T	SCREW-TAPPING	RH,+ ,2S,M4,L20,ZPC(BLK),SWRCH1	2	
3-4		ASSY-HOLDER,SPK OPTION			
3-5	AA60-10050T	SCREW-TAPPING	RH,+ ,2S,M4,L20,ZPC(BLK),SWRCH1	4	
4	AA61-20284A	HOLDER	-,P-CORD,PPVO,BLK,KE-002	1	

7. Electric Parts List

7-1 CK569BGT1X/BWT (VWT)

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
	ASSY-PCB,MAIN(OPT)						
	BUYER : CIS (RUSSIA)						
	* AA94-10132X ASSY-PCB,MAIN(OPT);CK569BGT1X/BWT,SCT57B,RUSSIA,-						
	AA94-10134D ASSY-PCB,MAIN(OPT);CK569BGT1X/VWT,SCT57B,N-RUSIA						
C101	2401-000758	C-AL:220nF,20%,50V,GP,TP,5x11mm,5mm		C406	2306-000187	C-FILM,MPPF:330nF,5%,400V,BK,26x20.5x13.5,	
C102	2401-000832	C-AL:220uF,20%,25V,GP,TP,8x11.5,5mm		C407	2201-000984	C-CERAMIC,DISC:680pF,10%,2KV,Y5P,TP,11x6,7,5mm	
C103	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3,		C408	2305-000382	C-FILM,MPEF:4.7nF,5%,400V,TP,-,5mm	
C104	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3,		C409	2201-000556	C-CERAMIC,DISC:470pF,10%,500V,Y5P,TP,7x4,5	
C105	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3,		C410	2401-001661	C-AL:68uF,20%,100V,GP,TP,10x16mm,5mm	
C106	2401-001082	C-AL:330nF,20%,50V,GP,TP,5x11mm,5mm		C411	2305-000178	C-FILM,MPEF:10nF,5%,100V,TP,-,5mm	
C107	2401-000914	C-AL:22uF,20%,16V,-,TP,5x11,5mm		C412	2201-000599	C-CERAMIC,DISC:560pF,10%,500V,Y5P,TP,7x4,5	
C108	2401-001537	C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm		C413	2401-000302	C-AL:100uF,20%,25V,GP,TP,6.3x11,5mm	
C109	2202-000127	C-CERAMIC,MLC-AXIAL:10nF,+80-20%,25V,Y5V,TP,-,7.5		C415	2306-000326	C-FILM,MPPF:4.7nF,5%,1.6KV,TP,28.5x16x9mm,	
C209	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-		C416	2303-001004	C-FILM,PPF:15nF,5%,400V,TP,20x6.5x13.7,5mm	
C210	2305-000149	C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5,5		C418	2201-000556	C-CERAMIC,DISC:470pF,10%,500V,Y5P,TP,7x4,5	
C211	2401-001537	C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm		C419	2401-001397	C-AL:470uF,20%,25V,GP,TP,10x16mm,5mm	
C213	2301-000224	C-FILM,PEF:22nF,5%,50V,TP,7.4x3.9x13mm,5mm		C420	2305-000288	C-FILM,MPEF:220nF,5%,50V,TP,7.3x4.8x5.5mm,	
C214	2401-000660	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		C421	2401-000302	C-AL:100uF,20%,25V,GP,TP,6.3x11,5mm	
C215	2305-000412	C-FILM,MPEF:470nF,5%,63V,TP,-,5mm		C422	2305-000665	C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0mm,	
C216	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11,5mm		C423	2201-000556	C-CERAMIC,DISC:470pF,10%,500V,Y5P,TP,7x4,5	
C217	2305-000665	C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0mm,		C424	2401-002278	C-AL:22uF,20%,250V,WT,TP,13x21,5	
C218	2305-000412	C-FILM,MPEF:470nF,5%,63V,TP,-,5mm		C425	2305-000154	C-FILM,MPEF:100nF,5%,400V,TP,21.5x6.5x11.5	
C219	2401-001537	C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm		C426	2401-000302	C-AL:100uF,20%,25V,GP,TP,6.3x11,5mm	
C220	2401-000302	C-AL:100uF,20%,25V,GP,TP,6.3x11,5mm		C427	2201-000406	C-CERAMIC,DISC:270pF,10%,2KV,Y5P,TP,8x6,7,5	
C221	2305-000288	C-FILM,MPEF:220nF,5%,50V,TP,7.3x4.8x5.5mm,		C502	2201-000315	C-CERAMIC,DISC:2.2nF,+80-20%,250VAC,Y5U,TP,9x	
C222	2305-000412	C-FILM,MPEF:470nF,5%,63V,TP,-,5mm		C503	2201-000969	C-CERAMIC,DISC:10nF,+80-20%,3KV,Y5V,TP,-,10mm	
C223	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3,		C504	2401-001232	C-AL:4.7uF,20%,250V,GP,TP,10x12.5mm	
C224	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3,		C506	2401-000430	C-AL:10uF,20%,250V,GP,TP,10x16mm,5mm	
C225	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3,		C507	2202-000862	C-CERAMIC,MLC-AXIAL:390pF,10%,50V,Y5P,TP,3.5x1.9,-	
C226	2401-002235	C-AL:10uF,20%,16V,GP,TP,5x11mm,5mm		C508	2202-000862	C-CERAMIC,MLC-AXIAL:390pF,10%,50V,Y5P,TP,3.5x1.9,-	
C227	2201-000986	C-CERAMIC,DISC:12pF,5%,50V,NPO,TP,5x3mm,2.5mm		C509	2202-000862	C-CERAMIC,MLC-AXIAL:390pF,10%,50V,Y5P,TP,3.5x1.9,-	
C228	2201-000257	C-CERAMIC,DISC:16pF,5%,50V,CH,TP,5x3,5		C601	2401-000587	C-AL:1uF,20%,50V,BP,TP,5x11,5mm	
C229	2301-000285	C-FILM,PEF:47nF,5%,50V,TP,7.5x4.0x6.5,5mm		C602	2301-000264	C-FILM,PEF:4.7nF,5%,50V,TP,6.5X5.5X3.0X5,	
C230	2301-000192	C-FILM,PEF:1nF,5%,50V,TP,5.3x10mm,5mm		C603	2401-000660	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm	
C231	2202-000183	C-CERAMIC,MLC-AXIAL:2.2nF,20%,16V,Y5R,TP,3.5x19,-		C604	2301-000192	C-FILM,PEF:1nF,5%,50V,TP,5.3x10mm,5mm	
C232	2305-000412	C-FILM,MPEF:470nF,5%,63V,TP,-,5mm		C605	2401-000587	C-AL:1uF,20%,50V,BP,TP,5x11,5mm	
C233	2309-000138	C-FILM,PE-PPF:100nF,5%,50V,TP,20x16x8.5,7,5mm		C606	2301-000264	C-FILM,PEF:4.7nF,5%,50V,TP,6.5X5.5X3.0X5,	
C234	2305-000288	C-FILM,MPEF:220nF,5%,50V,TP,7.3x4.8x5.5mm,		C607	2401-001998	C-AL:1000uF,20%,25V,GP,TP,10x20,5mm	
C235	2202-000162	C-CERAMIC,MLC-AXIAL:15pF,5%,50V,SL,TP,3.5x19,-		C705	2305-000288	C-FILM,MPEF:220nF,5%,50V,TP,7.3x4.8x5.5mm,	
C236	2202-000253	C-CERAMIC,MLC-AXIAL:4.7nF,20%,16V,Y5R,TP,1.9x3.5,7		C707	2401-000302	C-AL:100uF,20%,25V,GP,TP,6.3x11,5mm	
C237	2401-000480	C-AL:10uF,20%,50V,GP,TP,5x11,5		C709	2305-000665	C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0mm,	
C238	2301-000380	C-FILM,PEF:10nF,5%,50V,TP,6.5x3mm,5mm		C710	2401-000302	C-AL:100uF,20%,25V,GP,TP,6.3x11,5mm	
C239	2301-000264	C-FILM,PEF:4.7nF,5%,50V,TP,6.5X5.5X3.0X5,		C712	2401-000440	C-AL:10uF,20%,25V,GP,TP,5x11mm,5mm	
C240	2401-001537	C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm		C713	2301-000247	C-FILM,PEF:33nF,5%,50V,TP,8.1x4.5x13mm,5mm	
C241	2401-000603	C-AL:1uF,20%,50V,GP,TP,5x11mm,5mm		C714	2301-000289	C-FILM,PEF:5.6nF,5%,50V,TP,7x6x3,5	
C242	2202-000183	C-CERAMIC,MLC-AXIAL:2.2nF,20%,16V,Y5R,TP,3.5x19,-		C717	2301-000289	C-FILM,PEF:5.6nF,5%,50V,TP,7x6x3,5	
C243	2401-000603	C-AL:1uF,20%,50V,GP,TP,5x11mm,5mm		C718	2301-000247	C-FILM,PEF:33nF,5%,50V,TP,8.1x4.5x13mm,5mm	
C244	2202-000199	C-CERAMIC,MLC-AXIAL:22nF,+80-20%,25V,Y5V,TP,-,7.5		C719	2401-000480	C-AL:10uF,20%,50V,GP,TP,5x11,5	
C245	2305-000665	C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0mm,		C721	2301-000175	C-FILM,PEF:15nF,5%,50V,TP,7.1x3.5x13mm,5mm	
C246	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3,		C722	2305-000288	C-FILM,MPEF:220nF,5%,50V,TP,7.3x4.8x5.5mm,	
C255	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3,		C723	2301-000175	C-FILM,PEF:15nF,5%,50V,TP,7.1x3.5x13mm,5mm	
C256	2202-000830	C-CERAMIC,MLC-AXIAL:82pF,10%,50V,Y5P,TP,3.5x19,-		C725	2305-000288	C-FILM,MPEF:220nF,5%,50V,TP,7.3x4.8x5.5mm,	
C301	2305-000412	C-FILM,MPEF:470nF,5%,63V,TP,-,5mm		C727	2305-000288	C-FILM,MPEF:220nF,5%,50V,TP,7.3x4.8x5.5mm,	
C302	2401-003028	C-AL:100uF,20%,25V,WT,TP,6.3x11,5mm		C728	2401-001537	C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm	
C303	2401-001661	C-AL:68uF,20%,100V,GP,TP,10x16mm,5mm		C801	2306-000112	C-FILM,MPPF:100nF,20%,250V,BK,-,15mm	
C304	2305-000149	C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5,5		C804	2201-000315	C-CERAMIC,DISC:2.2nF,+80-20%,250VAC,Y5U,TP,9x	
C305	2305-000149	C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5,5		C805	2201-000315	C-CERAMIC,DISC:2.2nF,+80-20%,250VAC,Y5U,TP,9x	
C306	2301-000188	C-FILM,PEF:1nF,5%,100V,TP,10.5x12.5x6.5,5		C806	2401-003030	C-AL:220uF,20%,450V,GP,BK,30x35mm,1	
C402	2301-000380	C-FILM,PEF:10nF,5%,50V,TP,6.5x3mm,5mm		C807	2303-000163	C-FILM,PPF:2.2nF,5%,800V,TP,15x13x8.5,7,5	
C403	2401-000901	C-AL:22uF,20%,160V,GP,TP,10x20mm,5mm		C808	2401-002284	C-AL:33uF,20%,50V,GP,TP,5x11mm,5mm	
C404	2201-000291	C-CERAMIC,DISC:1nF,10%,500V,Y5P,TP,8.5x5MM,5		C809	2301-000224	C-FILM,PEF:22nF,5%,50V,TP,7.4x3.9x13mm,5mm	
C405	2401-002268	C-AL:2.2uF,20%,250V,LZ,TP,8X11,5		C811	2201-000144	C-CERAMIC,DISC:100pF,5%,50V,CH,TP,8x3,5	
				C812	2201-000954	C-CERAMIC,DISC:4.7nF,20%,400V,Y5U,BK,7x16,10mm	
				C813	2201-000954	C-CERAMIC,DISC:4.7nF,20%,400V,Y5U,BK,7x16,10mm	
				C814	2201-000991	C-CERAMIC,DISC:560pF,10%,2KV,Y5P,TP,13x7,7,5	
				C815	2401-003058	C-AL:100uF,20%,200V,WT,TP,16x25mm,7	
				C816	2401-000293	C-AL:100uF,+30-10%,200V,HR,TP,16x25	
				C817	2201-000599	C-CERAMIC,DISC:560pF,10%,500V,Y5P,TP,7x4,5	
				C818	2401-000706	C-AL:220uF,20%,25V,GP,TP,16x25mm,7	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
C819	2201-000599	C-CERAMIC,DISC:560pF,10%,500V,Y5P,TP,7x4,5		D904	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP	
C820	2401-003047	C-AL:2200uF,20%,25V,WT,TP,16x25,7,5		D905	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP	
C821	2301-000192	C-FILM,PEF:1nF,5%,50V,TP,5.3x10mm,5mm		D906	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP	
C823	2401-000302	C-AL:100uF,20%,25V,GP,TP,6.3x11,5mm		D907	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP	
C824	2305-000288	C-FILM,MPEF:220nF,5%,50V,TP,7.3x4.8x5.5mm,		DV801	1405-000152	VARISTOR:560V,2500A,14x8.5mm,TP	
C825	2305-000665	C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0mm,		DV802	1405-000152	VARISTOR:560V,2500A,14x8.5mm,TP	
C826	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11,5mm		DZ101	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C827	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11,5mm		DZ201	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C828	2401-000832	C-AL:220uF,20%,25V,GP,TP,8x11,5,5mm		DZ204	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C829	2401-000480	C-AL:10uF,20%,50V,GP,TP,5x11,5		DZ205	0403-000551	DIODE-ZENER:MTZ3.9B,3.9V,3.89-4.16V,500mW,	
C830	2401-000603	C-AL:1uF,20%,50V,GP,TP,5x11mm,5mm		DZ301	0403-000660	DIODE-ZENER:MTZ22A,22V,20.15-21.2V,500mW,D	
C831	2401-000440	C-AL:10uF,20%,25V,GP,TP,5x11mm,5mm		DZ302	0403-000700	DIODE-ZENER:TZP33A,33V,31-35V,1W,DO-41,TP	
C832	2401-000287	C-AL:100uF,20%,16V,WT,TP,6x11mm,5mm		DZ303	0403-000538	DIODE-ZENER:MTZ30D,30V,29.02-30.51V,500mW,DO-3	
C833	2401-000287	C-AL:100uF,20%,16V,WT,TP,6x11mm,5mm		DZ304	0403-001039	DIODE-ZENER:MA2560,56V,52-60V,1W,DO-41,TP	
C901	2201-000234	C-CERAMIC,DISC:150pF,5%,50V,CH,TP,9.5x3,5		DZ401	0403-000700	DIODE-ZENER:TZP33A,33V,31-35V,1W,DO-41,TP	
C902	2301-000108	C-FILM,PEF:1.5nF,5%,50V,TP,6.5x3.0x5.5mm,		DZ402	0403-000295	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C903	2201-000119	C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP,8x3,5		DZ420	0403-000294	DIODE-ZENER:MTZ4.7B,4.75V,4.80V,500mW,DO-34	
C904	2401-000480	C-AL:10uF,20%,50V,GP,TP,5x11,5		DZ501	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C905	2305-000149	C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5,5		DZ502	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C906	2305-000149	C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5,5		DZ503	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C907	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3.		DZ504	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C908	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3.		DZ601	0403-000555	DIODE-ZENER:MTZ30D,30V,29.02-30.51V,500mW,	
C909	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3.		DZ602	0403-000555	DIODE-ZENER:MTZ30D,30V,29.02-30.51V,500mW,	
C910	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-		DZ603	0403-000555	DIODE-ZENER:MTZ30D,30V,29.02-30.51V,500mW,	
C911	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-		DZ604	0403-000555	DIODE-ZENER:MTZ30D,30V,29.02-30.51V,500mW,	
C912	2401-001333	C-AL:470nF,20%,50V,GP,TP,5x11,5		DZ605	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C913	2301-000264	C-FILM,PEF:4.7nF,5%,50V,TP,6.5X5.5X3.0X5,		DZ701	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C914	2305-000665	C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0mm,		DZ702	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C915	2401-001537	C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm		DZ703	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C916	2201-000193	C-CERAMIC,DISC:10pF,0.3pF,50V,CH,TP,5x3,5		DZ704	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C917	2201-000573	C-CERAMIC,DISC:47pF,5%,50V,CH,TP,6.5x3.0,5		DZ705	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C918	2301-000192	C-FILM,PEF:1nF,5%,50V,TP,5.3x10mm,5mm		DZ803	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C919	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3.		DZ805	1203-001217	IC-POS.ADJUST REG.:431,TO-92,3P,4.58MIL,PLASTIC,2	
C920	2401-000440	C-AL:10uF,20%,25V,GP,TP,5x11mm,5mm		DZ807	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C921	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-		DZ901	1203-000451	IC-VOLTAGE REGULATOR:33,TO-92,3P,-,PLASTIC,31/35V,2	
C922	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11,5mm		DZ902	0403-000295	DIODE-ZENER:MTZ5.1B,5.1V,4.94-5.20V,500mW,	
C923	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3.		DZ903	0403-000559	DIODE-ZENER:MTZ6.2C,6.2V,6.12-6.44V,500mW,	
C924	2401-000440	C-AL:10uF,20%,25V,GP,TP,5x11mm,5mm		DZ904	0403-000563	DIODE-ZENER:MTZ9.1B,9.1V,8.57-9.01V,500mW,	
C925	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3.		DZ905	0403-000296	DIODE-ZENER:MTZ5.6B,5.6V,5.45-5.73V,500mW,	
C926	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3.		F801	3601-000281	FUSE-FERRULE:250V,4A,TIME LAG,GLASS,5x20mm	
C927	2202-002037	C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5P,TP,2.2x3.		F801A	3602-000114	FUSE-HOLDER:-,30mohm	
CN501	AA39-20570A	LEAD CONNECTOR-ASSY:-,YBNH025-08,TIE,8Px85/B3,500m		F801B	3602-000114	FUSE-HOLDER:-,30mohm	
CN602	3711-002644	CONNECTOR-HEADER:BOX,5P,1R,2.5mm,STRAIGHT,SN		F802	3601-001086	FUSE-FERRULE:125V,5A,QUICK-ACTING,CERAMIC,2	
CN701	3711-002647	CONNECTOR-HEADER:BOX,8P,1R,2.5mm,STRAIGHT,SN		HC101	AA13-20004A	IC-HYBRID:-,PAP102T,SIP,6P,PPE-AMP,TP	
CN802	AA27-20003T	COIL-DEGAUSSING:-,22.16,7ohm,60T,2600mm,E		IC201	1204-001145	IC-DEMODULATOR:TDA8844,DIP,56P,-,PLASTIC,8.8V	
CN904	3711-002644	CONNECTOR-HEADER:BOX,5P,1R,2.5mm,STRAIGHT,SN		IC301	1204-000426	IC-VERTICAL PROCESSOR:TDA83500/N4,SIP,13P,-,PLASTIC,	
CW701	2503-000158	C-NETWORK:330pF,4,20%,50V,MCCB1H331MX4YT		IC401	1203-000243	IC-POS.FIXED REG.:7812A,TO-220,3P,-,PLASTIC,11.5	
CW901	2503-000156	C-NETWORK:100pF,4,20%,50V		IC501	1201-001159	IC-VIDEO AMP:6107,ZIP,9P,300MIL,SINGLE,-,PL	
D205	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		IC601	1201-001064	IC-POWER AMP:7297,ZIP,15P,-,DUAL,32dB,PLAST	
D217	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		IC701	1204-000473	IC-AUDIO PROCESSOR:TDA9859,DIP,32P,-,PLASTIC,-,-,	
D401	0402-000493	DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L,TP		IC801	1203-001313	IC-PWM CONTROLLER:3S0680,TO-3P,5,150MIL,PLASTIC,	
D402	0402-000132	DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP		IC802	0604-001038	PHOTO-COUPLER:TR,130-260V,200mW,DIP-4,ST	
D403	0402-000132	DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP		IC803	1203-001006	IC-VOLTAGE REGULATOR:78R05,TO-220F,4P,-,PLASTIC,4.8	
D404	0402-001012	DIODE-RECTIFIER:FMP-3FU,1500V,5A,TO-3PF		IC804	1203-000644	IC-POS.FIXED REG.:7630,SIP,10P,-,PLASTIC,5.1/8V,	
D405	0402-000493	DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L,TP		IC901	AA13-30019R	IC-MCU:-,Z8933212PSC-R3719,16BIT,SDIP	
D406	0402-000546	DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41		IC902	1103-000156	IC-EEPROM:24C04,512X8BIT,DIP,8P,300MIL,1	
D407	0402-000216	DIODE-RECTIFIER:ERC24-06,600V,1.0A,DO-204		J415	2001-001037	R-CARBON(S):0.39ohm,5%,1/2W,AA,TP,2.4x6.4mm	
D408	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		JA701	3722-000183	JACK-SCART:21P,4mm,SN,BLK,NO	
D501	0402-000216	DIODE-RECTIFIER:ERC24-06,600V,1.0A,DO-204		L101	2701-001033	INDUCTOR-AXIAL:1uH,10%,5x14mm	
D502	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP		L102	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
D503	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP		L103	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
D504	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP		L204	2701-000197	INDUCTOR-AXIAL:5.6uH,10%,2.5x3.4mm	
D601	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L205	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
D602	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L206	2701-000142	INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm	
D701	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L207	2701-000142	INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm	
D801	0402-001160	DIODE-BRIDGE:D5SB60,600V,2.8A,SIP-4,ST		L208	2701-000142	INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm	
D802	0402-000213	DIODE-RECTIFIER:ERB12-06,600V,1.0A,DO-41		L301	2701-000116	INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm	
D803	0402-001105	DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-,TP		L302	2701-000116	INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm	
D804	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L303	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
D805	0402-000231	DIODE-RECTIFIER:FMG-G26S,600V,4A,TO-220F,ST		L304	2701-000178	INDUCTOR-AXIAL:33uH,10%,2.8x7mm	
D806	0402-000493	DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L,TP		L401	AA27-40003L	COIL-HORIZ.WIDTH:-,1.0mH,DR14x20.2UEW0.45,ST	
D807	0402-000233	DIODE-RECTIFIER:FML-G12S,200V,5A,-		L402	AA27-30003L	COIL-LINERITY:-,73uH,DR12x15,0.55mm,-,BK,15%	
D809	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L601	3301-000287	CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500,2400G	
D810	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L603	3301-000287	CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500,2400G	
D901	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L701	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
D902	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L702	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
D903	0401-000005	DIODE-SWITCHING:1N4148,75V,300mA,DO-35,TP		L703	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	


Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
L704	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R401	2004-004092	R-METAL:52.6Kohm,1%,1/2W,AA,TP,2.5x6.5	
L709	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R402	2001-000028	R-CARBON(S):100ohm,5%,1/2W,AA,TP,2.4x6.4mm	
L801	AA29-300010	FILTER-LINE:-,20mH,1.26A,-,BSF3050		R403	2001-001155	R-CARBON(S):5.6Kohm,5%,1/2W,AA,TP,2.4x6.4mm	
L803	3301-000287	CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500,2400G		R405	2001-001138	R-CARBON(S):390ohm,5%,1/2W,AA,TP,2.4x6.4mm	
L804	2901-000297	FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP-		R406	2003-002008	R-METAL OXIDE(S):18Kohm,5%,2W,AF,TP,3.9x10mm	
L805	AA27-10002Y	COIL-CHOKE:-,100uH,K,10,700mA,T,100UH-K(S		R407	2003-000993	R-METAL OXIDE(S):3.9Kohm,5%,1W,AF,TP,2.5x6.5mm	
L806	3301-000287	CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500,2400G		R408	2008-000179	R-FUSIBLE(S):10ohm,5%,1/2W,AA,TP,2.5x6.5mm	
L807	3301-000287	CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500,2400G		R409	2008-000264	R-FUSIBLE(S):1ohm,5%,1W,AF,TP,3.9x10mm	
L808	3301-000287	CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500,2400G		R410	2001-001114	R-CARBON(S):270ohm,5%,1/2W,AA,TP,2.4x6.4mm	
L901	2701-000189	INDUCTOR-AXIAL:470nH,10%,2.5x3.4mm		R411	2001-001066	R-CARBON(S):110ohm,5%,1/2W,AA,TP,2.4x6.4mm	
L903	2701-000197	INDUCTOR-AXIAL:5.6uH,10%,2.5x3.4mm		R413	2008-000251	R-FUSIBLE(S):0.27ohm,10%,2W,AF,TP,3.9x10mm	
L904	2701-000211	INDUCTOR-AXIAL:68uH,10%,2.5x3.4mm		R414	2008-001033	R-FUSIBLE(S):10ohm,5%,2W,AF,TP,3.9x10mm	
L905	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R415	2008-000221	R-FUSIBLE:0.47ohm,10%,1/2W,AA,TP,4.7x11m	
L906	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		R416	2001-000633	R-CARBON:30Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
LD901	AA96-30001B	ASSY-LED,GUIDE:-,AA61-50055A,DL-G5RGA,-		R417	2004-001408	R-METAL(S):91Kohm,1%,1/2W,AA,TP,2.4x6.4mm	
Q204	0501-000389	TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,TP,120-		R418	2004-001408	R-METAL(S):91Kohm,1%,1/2W,AA,TP,2.4x6.4mm	
Q207	0501-000389	TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,TP,120-		R419	2004-001390	R-METAL(S):1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
Q210	0501-000389	TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,TP,120-		R421	2001-000022	R-CARBON(S):33ohm,5%,1/2W,AA,TP,2.4x6.4mm	
Q401	0502-000242	TR-POWER:KSA614,PNP,25W,TO-220,TP,40-24		R501H	2002-001008	R-COMPOSITION:1.8Kohm,5%,1/2W,AA,TP,3.7x9mm	
Q402	0501-000369	TR-SMALL SIGNAL:KSC2331-Y,NPN,1W,TO-92L,-,120-		R502H	2002-001008	R-COMPOSITION:1.8Kohm,5%,1/2W,AA,TP,3.7x9mm	
Q403	0502-000450	TR-POWER:2SD1887YD,NPN,1500V,800V,10A,7		R503	2002-001008	R-COMPOSITION:1.8Kohm,5%,1/2W,AA,TP,3.7x9mm	
Q704	0501-000283	TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,TP,120-		R504	2001-001062	R-CARBON(S):10Mohm,5%,1/2W,AA,TP,2.4x6.4mm	
Q901	0501-000389	TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,TP,120-		R505	2008-001015	R-FUSIBLE(S):1.5ohm,5%,2W,AF,TP,3.9x10mm	
Q902	0504-000123	TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,TP		R507	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
Q903	0504-000123	TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,TP		R508	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
Q904	0504-000123	TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,TP		R509	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
Q905	0501-000389	TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,TP,120-		R510	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
Q906	0501-000283	TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,TP,120-		R511	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
Q907	0501-000389	TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,TP,120-		R512	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
Q908	0501-000389	TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,TP,120-		R526	2008-001047	R-FUSIBLE(S):68ohm,5%,2W,AF,TP,3.9x10mm	
R101	2003-001035	R-METAL OXIDE(S):27ohm,0.05,2W,AF,TP,3.9x10mm		R527	2003-000994	R-METAL OXIDE(S):33Kohm,5%,2W,AF,TP,3.9x10mm	
R209	2001-000010	R-CARBON:68Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R601	2008-001002	R-FUSIBLE(S):0.18ohm,5%,2W,AA,TP,3.9x10mm	
R212	2001-000005	R-CARBON:390ohm,5%,1/8W,AA,TP,1.8x3.2mm		R602	2008-001002	R-FUSIBLE(S):0.18ohm,5%,2W,AA,TP,3.9x10mm	
R214	2001-000793	R-CARBON:47ohm,5%,1/8W,AA,TP,1.8x3.2mm		R603	2001-000232	R-CARBON:1.3Kohm,5%,1/8W,AA,TP,1.8x3.2m	
R215	2001-000780	R-CARBON:470ohm,5%,1/8W,AA,TP,1.8x3.2mm		R604	2001-000947	R-CARBON:7.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
R218	2001-000490	R-CARBON:200ohm,5%,1/8W,AA,TP,1.8x3.2mm		R605	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R219	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R606	2001-000232	R-CARBON:1.3Kohm,5%,1/8W,AA,TP,1.8x3.2m	
R220	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R607	2001-000947	R-CARBON:7.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
R221	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R701	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R222	2001-000440	R-CARBON:1ohm,5%,1/8W,AA,TP,1.8x3.2mm		R702	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R223	2001-000617	R-CARBON:3.9Mohm,5%,1/8W,AA,TP,1.8x3.2m		R703	2001-000490	R-CARBON:200ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R224	2001-000832	R-CARBON:510ohm,5%,1/8W,AA,TP,1.8x3.2mm		R704	2001-000490	R-CARBON:200ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R225	2001-000857	R-CARBON:560ohm,5%,1/8W,AA,TP,1.8x3.2mm		R709	2001-000969	R-CARBON:75ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R226	2001-000793	R-CARBON:47ohm,5%,1/8W,AA,TP,1.8x3.2mm		R710	2001-000003	R-CARBON:330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R227	2001-000739	R-CARBON:4.7Mohm,5%,1/8W,AA,TP,1.8x3.2m		R711	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R230	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R712	2001-000539	R-CARBON:24Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R233	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R713	2001-000969	R-CARBON:75ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R234	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R714	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R235	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R715	2001-000969	R-CARBON:75ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R239	2001-000009	R-CARBON:20Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R717	2001-000539	R-CARBON:24Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R241	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R718	2001-000969	R-CARBON:75ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R242	2001-000003	R-CARBON:330ohm,5%,1/8W,AA,TP,1.8x3.2mm		R719	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R244	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R726	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R246	2001-000273	R-CARBON:100Kohm,5%,1/8W,AA,TP,1.8x3.2m		R727	2001-000290	R-CARBON:10Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R247	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R728	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R248	2001-000793	R-CARBON:47ohm,5%,1/8W,AA,TP,1.8x3.2mm		R729	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R249	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R730	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R250	2001-000302	R-CARBON:10ohm,5%,1/8W,AA,TP,1.8x3.2mm		R731	2001-000290	R-CARBON:10Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R251	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R733	2001-000969	R-CARBON:75ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R252	2001-000977	R-CARBON:8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		R734	2001-000969	R-CARBON:75ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R253	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		R735	2001-000969	R-CARBON:75ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R255	2001-000008	R-CARBON:15Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R736	2001-000660	R-CARBON:33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
R256	2004-001234	R-METAL:75Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R740	2001-000780	R-CARBON:470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R257	2001-000660	R-CARBON:33Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R741	2001-000780	R-CARBON:470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
R258	2004-001914	R-METAL:39Kohm,2%,1/8W,AA,TP,1.8x3.5mm		R802	2003-000994	R-METAL OXIDE(S):33Kohm,5%,2W,AF,TP,3.9x10mm	
R259	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		R803	2003-000994	R-METAL OXIDE(S):33Kohm,5%,2W,AF,TP,3.9x10mm	
R260	2001-000660	R-CARBON:33Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R804	2001-001150	R-CARBON(S):470Kohm,5%,1/2W,AA,TP,2.4x6.4m	
R261	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R805	2001-001150	R-CARBON(S):470Kohm,5%,1/2W,AA,TP,2.4x6.4m	
R262	2004-001995	R-METAL:9.1Kohm,5%,1/8W,AA,TP,1.8x3.2m		R806	2004-001967	R-METAL(S):68Kohm,1%,1/2W,AA,TP,6.5x2.5mm	
R270	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		R807	2004-001373	R-METAL(S):100Kohm,1%,1/2W,AA,TP,2.4x6.4m	
R301	2004-001970	R-METAL(S):1.8Kohm,1%,1/2W,AA,TP,6.5x2.5m		R808	2002-001011	R-COMPOSITION:3.3Mohm,10%,1/2W,AA,TP,3.7x9mm	
R302	2004-004087	R-METAL(S):1.5ohm,1%,1/2W,AA,TP,2.5x6.5mm		R809	2002-001013	R-COMPOSITION:4.7Mohm,10%,1/2W,AA,TP,3.7x9mm	
R303	2004-004087	R-METAL(S):1.5ohm,1%,1/2W,AA,TP,2.5x6.5mm		R810	2003-001090	R-METAL OXIDE(S):10Kohm,5%,2W,AF,TP,4x12mm	
R304	2001-001131	R-CARBON(S):33Kohm,5%,1/2W,AA,TP,2.4x6.4mm		R811	2003-000784	R-METAL OXIDE(S):7.5Kohm,5%,2W,AF,TP,4x12mm	
R305	2003-001018	R-METAL OXIDE(S):220ohm,5%,2W,AF,TP,3.9x10mm		R812	2006-000321	R-CEMENT:5.6ohm,5%,7W,CB,BK,9.5x13.5x39	
R306	2003-001018	R-METAL OXIDE(S):220ohm,5%,2W,AF,TP,3.9x10mm		R813	2001-001050	R-CARBON(S):1.5Kohm,5%,1/2W,AA,TP,2.4x6.4m	
R307	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2mm		R814	2004-001390	R-METAL(S):1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
CNT01	3711-002702	CONNECTOR-HEADER:NOWALL,4P,1R,2.5mm,ANGLE,SN		LP10	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
CNT02	3711-002703	CONNECTOR-HEADER:NOWALL,5P,1R,2.5mm,ANGLE,SN		LP11	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
CNT03	3711-002705	CONNECTOR-HEADER:NOWALL,7P,1R,2.5mm,ANGLE,SN		LT01	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm	
CP01	2401-000404	C-AL:10uF,20%,16V,BP,TP,6x11mm,5mm		QP01	0501-000280	TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23,TP,70	
CP02	2401-000404	C-AL:10uF,20%,16V,BP,TP,6x11mm,5mm		QP02	0501-000280	TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23,TP,70	
CP03	2401-000404	C-AL:10uF,20%,16V,BP,TP,6x11mm,5mm		QP03	0501-000280	TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23,TP,70	
CP04	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		QP04	0501-000280	TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23,TP,70	
CP05	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		QP05	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP06	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		QP06	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP07	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		QP07	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP08	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		QP08	0501-000280	TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23,TP,70	
CP09	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		QP09	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP10	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11.5mm		QP10	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP11	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		QT01	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP12	2203-000323	C-CERAMIC,CHIP:12nF,10%,50V,X7R,TP,2012,-		QT02	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP13	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		QT03	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP14	2401-001515	C-AL:47uF,20%,16V,WT,TP,6x11mm,5mm		QT04	0501-000342	TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT-23,TP,	
CP15	2203-002232	C-CERAMIC,CHIP:3.3nF,20%,50V,X7R,TP,2012,-		RP01	2007-000300	R-CHIP:10Kohm,5%,1/10W,DA,TP,2012	
CP16	2203-000751	C-CERAMIC,CHIP:330nF,+80-20%,16V,Y5V,TP,2012,		RP02	2007-001166	R-CHIP:75ohm,5%,1/10W,DA,TP,2012	
CP17	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP03	2007-000468	R-CHIP:1Kohm,5%,1/10W,DA,TP,2012	
CP18	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP04	2007-000300	R-CHIP:10Kohm,5%,1/10W,DA,TP,2012	
CP19	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP05	2007-001166	R-CHIP:75ohm,5%,1/10W,DA,TP,2012	
CP20	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP06	2007-000468	R-CHIP:1Kohm,5%,1/10W,DA,TP,2012	
CP21	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP07	2007-000300	R-CHIP:10Kohm,5%,1/10W,DA,TP,2012	
CP22	2203-001105	C-CERAMIC,CHIP:6.8nF,10%,50V,X7R,TP,2012,-		RP08	2007-001166	R-CHIP:75ohm,5%,1/10W,DA,TP,2012	
CP23	2203-000609	C-CERAMIC,CHIP:22nF,10%,50V,X7R,TP,2012,-		RP09	2007-000468	R-CHIP:1Kohm,5%,1/10W,DA,TP,2012	
CP24	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP10	2007-000766	R-CHIP:330ohm,5%,1/10W,DA,TP,2012	
CP25	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012,-		RP11	2007-000468	R-CHIP:1Kohm,5%,1/10W,DA,TP,2012	
CP26	2401-000603	C-AL:1uF,20%,50V,GP,TP,5x11mm,5mm		RP12	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
CP27	2203-000429	C-CERAMIC,CHIP:18pF,5%,50V,NPO,TP,2012,-		RP13	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
CP28	2203-000429	C-CERAMIC,CHIP:18pF,5%,50V,NPO,TP,2012,-		RP14	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
CP29	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11.5mm		RP15	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
CP30	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP16	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
CP31	2401-000242	C-AL:100uF,20%,10V,GP,TP,6x11.5mm		RP17	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
CP32	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP18	2007-000493	R-CHIP:2.2Kohm,5%,1/10W,DA,TP,2012	
CP33	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012,-		RP19	2007-000493	R-CHIP:2.2Kohm,5%,1/10W,DA,TP,2012	
CP34	2401-001840	C-AL:100uF,20%,16V,GP,TP,6.3x11.5mm		RP20	2007-000290	R-CHIP:100ohm,5%,1/10W,DA,TP,2012	
CP35	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP21	2007-000290	R-CHIP:100ohm,5%,1/10W,DA,TP,2012	
CP36	2203-000609	C-CERAMIC,CHIP:22nF,10%,50V,X7R,TP,2012,-		RP22	2007-000300	R-CHIP:10Kohm,5%,1/10W,DA,TP,2012	
CP37	2401-000603	C-AL:1uF,20%,50V,GP,TP,5x11mm,5mm		RP23	2007-000830	R-CHIP:39Kohm,5%,1/10W,DA,TP,2012	
CP38	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012,-		RP24	2007-000493	R-CHIP:2.2Kohm,5%,1/10W,DA,TP,2012	
CP39	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP25	2007-000409	R-CHIP:15Kohm,5%,1/10W,DA,TP,2012	
CP40	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		RP26	2007-000290	R-CHIP:100ohm,5%,1/10W,DA,TP,2012	
CP41	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		RP28	2007-000001	R-CHIP:68Kohm,5%,1/10W,DA,TP,2012	
CP42	2401-000587	C-AL:1uF,20%,50V,BP,TP,5x11.5mm		RP29	2007-000872	R-CHIP:4.7Kohm,5%,1/10W,DA,TP,2012	
CP43	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP30	2007-000872	R-CHIP:4.7Kohm,5%,1/10W,DA,TP,2012	
CP44	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		RP31	2007-001071	R-CHIP:6.8Kohm,5%,1/10W,DA,TP,2012	
CP45	2201-000273	C-CERAMIC,DISC:18pF,5%,50V,CH,TP,5x3mm,5		RP32	2007-000642	R-CHIP:270ohm,5%,1/10W,DA,TP,2012	
CP46	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP33	2007-000401	R-CHIP:150ohm,5%,1/10W,DA,TP,2012	
CP47	2203-000561	C-CERAMIC,CHIP:220nF,+80-20%,25V,Y5V,TP,2012,		RP34	2007-000872	R-CHIP:4.7Kohm,5%,1/10W,DA,TP,2012	
CT01	2401-000242	C-AL:100uF,20%,10V,GP,TP,6x11.5mm		RP35	2007-000844	R-CHIP:3Kohm,5%,1/10W,DA,TP,2012	
CT02	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP36	2007-000844	R-CHIP:3Kohm,5%,1/10W,DA,TP,2012	
CT04	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP37	2007-000023	R-CHIP:120ohm,5%,1/10W,DA,TP,2012	
CT05	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP38	2007-000981	R-CHIP:5.6Kohm,5%,1/10W,DA,TP,2012	
CT06	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP39	2007-001177	R-CHIP:8.2Kohm,5%,1/10W,DA,TP,2012	
CT07	2401-000440	C-AL:10uF,20%,25V,GP,TP,5x11mm,5mm		RP40	2007-001001	R-CHIP:510ohm,5%,1/10W,DA,TP,2012	
CT08	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP41	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
CT09	2203-000295	C-CERAMIC,CHIP:10pF,5%,50V,NPO,TP,2012,-		RP42	2007-001001	R-CHIP:510ohm,5%,1/10W,DA,TP,2012	
CT10	2203-000295	C-CERAMIC,CHIP:10pF,5%,50V,NPO,TP,2012,-		RP43	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
CT11	2203-000192	C-CERAMIC,CHIP:100nF,+80-20%,50V,Y5V,TP,2012,		RP44	2007-001001	R-CHIP:510ohm,5%,1/10W,DA,TP,2012	
CT12	2401-000660	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		RP45	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
DP01	0401-000133	DIODE-SWITCHING:RLS4148,100V,200mA,500mW,4nS,S		RP46	2007-001009	R-CHIP:51Kohm,5%,1/10W,DA,TP,2012	
DT01	0401-000133	DIODE-SWITCHING:RLS4148,100V,200mA,500mW,4nS,S		RP47	2007-000774	R-CHIP:33Kohm,5%,1/10W,DA,TP,2012	
DZP02	0403-000662	DIODE-ZENER:MTZ3.0B,3.0V,3.01-3.22V,500mW,		RP48	2007-000931	R-CHIP:470ohm,5%,1/10W,DA,TP,2012	
ICP01	1001-000223	IC-VIDEO SWITCH:TEA5114A,-,DIP,16P,334MIL,SING		RP49	2007-000401	R-CHIP:150ohm,5%,1/10W,DA,TP,2012	
ICP02	1204-000530	IC-PAL/NTSC DECODER:TDA9160A,DIP,32P,400MIL,PLASTI		RP50	2007-001001	R-CHIP:510ohm,5%,1/10W,DA,TP,2012	
ICP03	1204-001175	IC-PICTURE PROCESS:SDA9288X A141,SOP,32P,-PLASTI		RP51	2007-000572	R-CHIP:220ohm,5%,1/10W,DA,TP,2012	
ICT01	1204-001401	IC-PAL DECODER:SAA5261PS/102,DIP,52P,600MIL,P		RP52	2007-000728	R-CHIP:300ohm,5%,1/10W,DA,TP,2012	
ICT02	1103-000128	IC-EEPROM:24C02,256*8BIT,DIP,8P,300MIL,1		RP53	2007-000931	R-CHIP:470ohm,5%,1/10W,DA,TP,2012	
ICT03	1203-000641	IC-RESET:7442,TO-92,3P,-,PLASTIC,-0.3/7		RP54	2007-000872	R-CHIP:4.7Kohm,5%,1/10W,DA,TP,2012	
JP01	2007-000029	R-CHIP:0ohm,5%,1/10W,DA,TP,2012		RP55	2007-000477	R-CHIP:1Mohm,5%,1/10W,DA,TP,2012	
JP02	2007-000029	R-CHIP:0ohm,5%,1/10W,DA,TP,2012		RP56	2007-000593	R-CHIP:22ohm,5%,1/10W,DA,TP,2012	
JT01	2007-000029	R-CHIP:0ohm,5%,1/10W,DA,TP,2012		RP57	2007-000409	R-CHIP:15Kohm,5%,1/10W,DA,TP,2012	
JT02	2007-000029	R-CHIP:0ohm,5%,1/10W,DA,TP,2012		RP58	2007-000703	R-CHIP:3.6Kohm,5%,1/10W,DA,TP,2012	
LP01	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		RP59	2001-001077	R-CARBON(S):150ohm,5%,1/2W,AA,TP,2.4x6.4mm	
LP05	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		RP60	2007-000844	R-CHIP:3Kohm,5%,1/10W,DA,TP,2012	
LP09	2701-000114	INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm		RP61	2007-000468	R-CHIP:1Kohm,5%,1/10W,DA,TP,2012	


Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
RP62	2007-000964	R-CHIP;5.1Kohm,5%,1/10W,DA,TP,2012					
RP63	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RP64	2007-001166	R-CHIP;75ohm,5%,1/10W,DA,TP,2012					
RP65	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RP66	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RT01	2007-000872	R-CHIP;4.7Kohm,5%,1/10W,DA,TP,2012					
RT02	2007-000872	R-CHIP;4.7Kohm,5%,1/10W,DA,TP,2012					
RT03	2007-000872	R-CHIP;4.7Kohm,5%,1/10W,DA,TP,2012					
RT04	2007-000872	R-CHIP;4.7Kohm,5%,1/10W,DA,TP,2012					
RT05	2007-000872	R-CHIP;4.7Kohm,5%,1/10W,DA,TP,2012					
RT06	2007-000931	R-CHIP;470ohm,5%,1/10W,DA,TP,2012					
RT07	2007-000030	R-CHIP;560ohm,5%,1/10W,DA,TP,2012					
RT08	2007-000653	R-CHIP;27Kohm,5%,1/10W,DA,TP,2012					
RT11	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RT12	2007-000964	R-CHIP;5.1Kohm,5%,1/10W,DA,TP,2012					
RT13	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RT14	2007-000844	R-CHIP;3Kohm,5%,1/10W,DA,TP,2012					
RT15	2007-000282	R-CHIP;100Kohm,5%,1/10W,DA,TP,2012					
RT17	2007-000290	R-CHIP;100ohm,5%,1/10W,DA,TP,2012					
RT18	2007-000290	R-CHIP;100ohm,5%,1/10W,DA,TP,2012					
RT20	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RT21	2007-000728	R-CHIP;300ohm,5%,1/10W,DA,TP,2012					
RT22	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RT23	2007-000931	R-CHIP;470ohm,5%,1/10W,DA,TP,2012					
RT24	2007-001055	R-CHIP;6.2Kohm,5%,1/10W,DA,TP,2012					
RT25	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RT26	2007-000931	R-CHIP;470ohm,5%,1/10W,DA,TP,2012					
RT27	2007-001055	R-CHIP;6.2Kohm,5%,1/10W,DA,TP,2012					
RT28	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
RT29	2007-000931	R-CHIP;470ohm,5%,1/10W,DA,TP,2012					
RT30	2007-001055	R-CHIP;6.2Kohm,5%,1/10W,DA,TP,2012					
RT31	2007-000468	R-CHIP;1Kohm,5%,1/10W,DA,TP,2012					
XP01	2801-000276	CRYSTAL-UNIT;4.433619MHz,40ppm,28-AAM,20pF,					
XP02	2801-000235	CRYSTAL-UNIT;3.579545MHz,40ppm,28-AAM,S,75o					
XP03	2801-003485	CRYSTAL-UNIT;21.059153MHz,30ppm,28-ABQ,17pF					
XT01	2801-003433	CRYSTAL-UNIT;12MHz,30ppm,28-AAA,30pF,30ohm,					
						ASSY-POWER,CORD	
						AA39-10006X POWER-CORD;-;KKP419C,KLCE-2F,2.286MT,3P;V	
						AA61-20284A HOLDER;-;P-CORD,PP,VO,BLK,KE-002	
						REMOCON	
						AA59-10084S REMOCON;-;TM48,RM155AR,47,L/GRY,SS	
						ASSY-HOLDER,SPK	
						AA91-60207A ASSY-HOLDER,SPK;-;M-PP,HB,BLK/HORN,168mm,8R15W	
						ASSY-CRT	
						AA03-10026K CRT-COLOR;-;A53QCA891X(B),+380mG,21,90d	
						AA27-50004N DEFLECTION-YOKE;-;DSQ-2192AL,21/A53QCA691X,SH	
						AA27-60001K MAGNET-CONVERGENCE;-;NY-291,29.1mm	
						AA63-60028A SPACER-DY;NEOPRENE;-;BLK,VO W12,-;-	
						ASSY-ACCESSORY	
						AA26-90001C TRANS-MATCHING;-;300ohm/75ohm,PAL,40-890MHz	
						AA42-10001V ANT-ROD;-;3S,620mm,BRN,UL/CSA	
						AA68-11204A MANUAL-USERS;SCT57B,RUSSIA,TM51,B5,W/P 100{	

8. Block Diagram

8-1 Signal Block

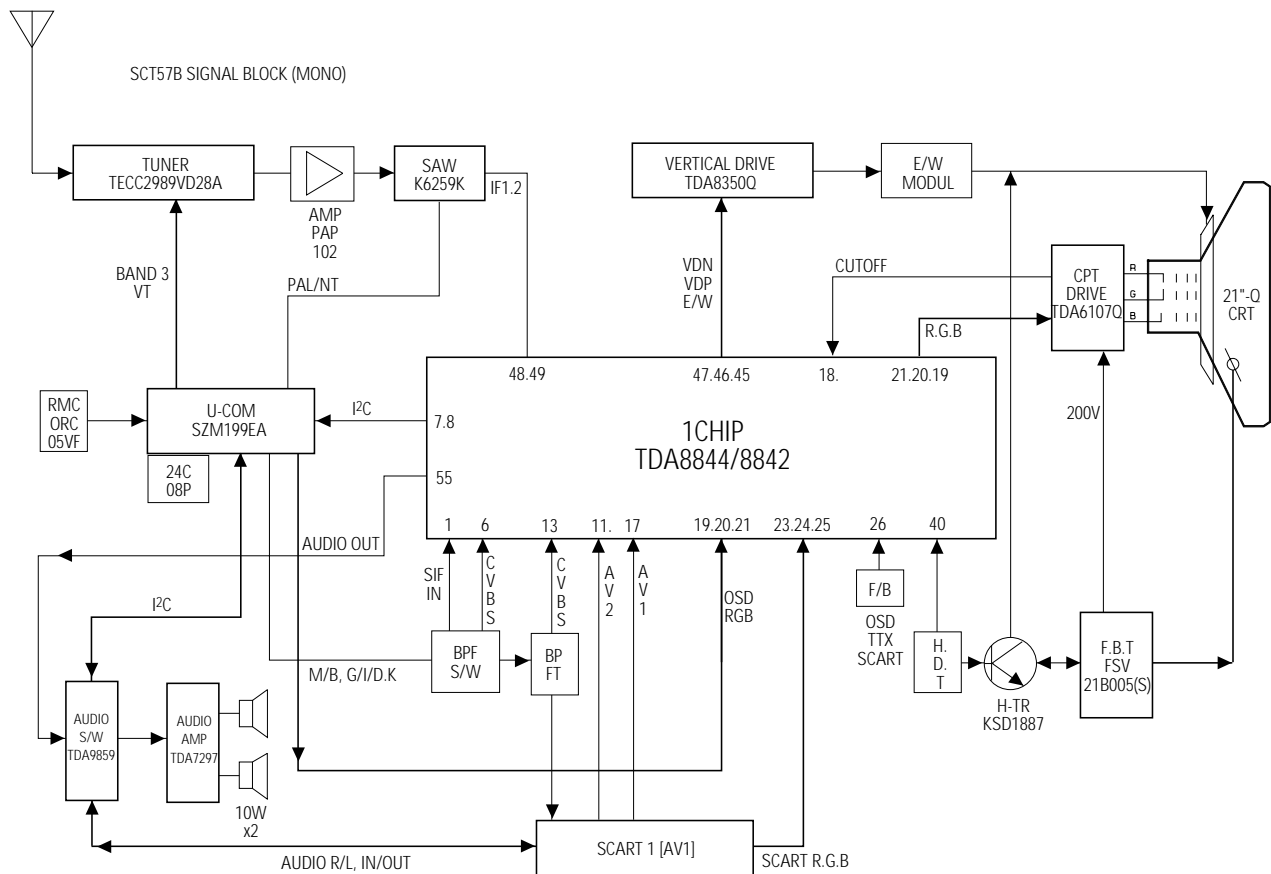


8-2 Power Block

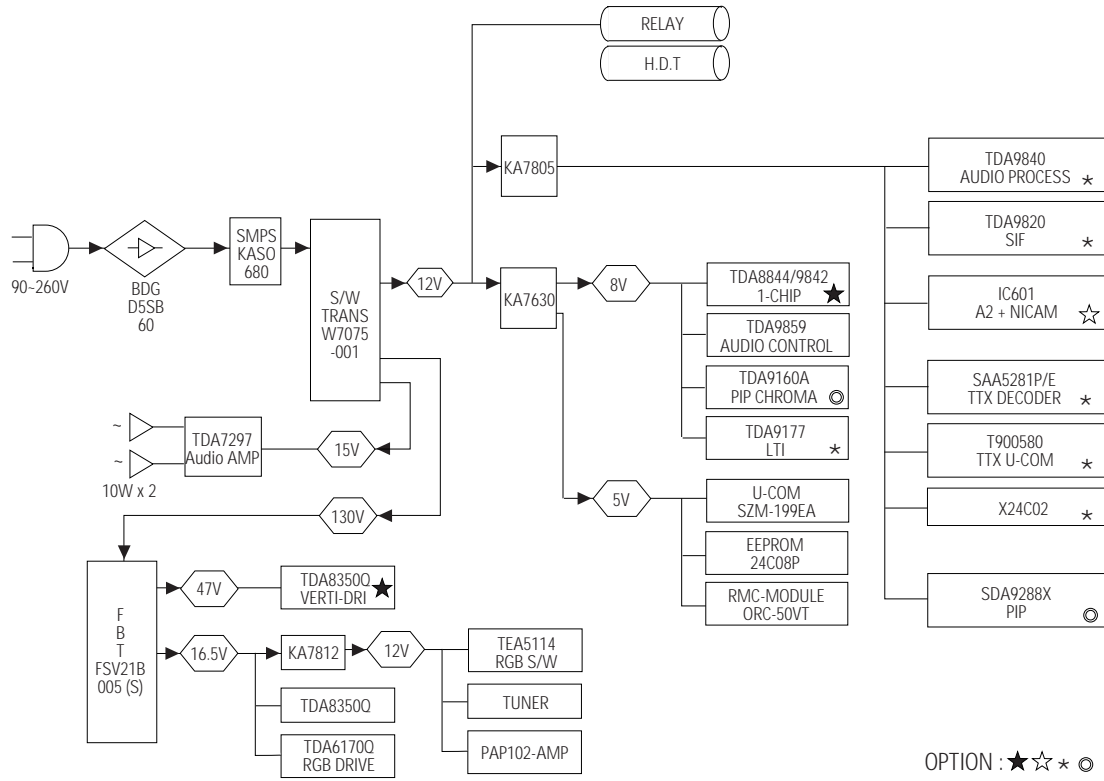


9. PCB Layout

9-1 PCB MAIN

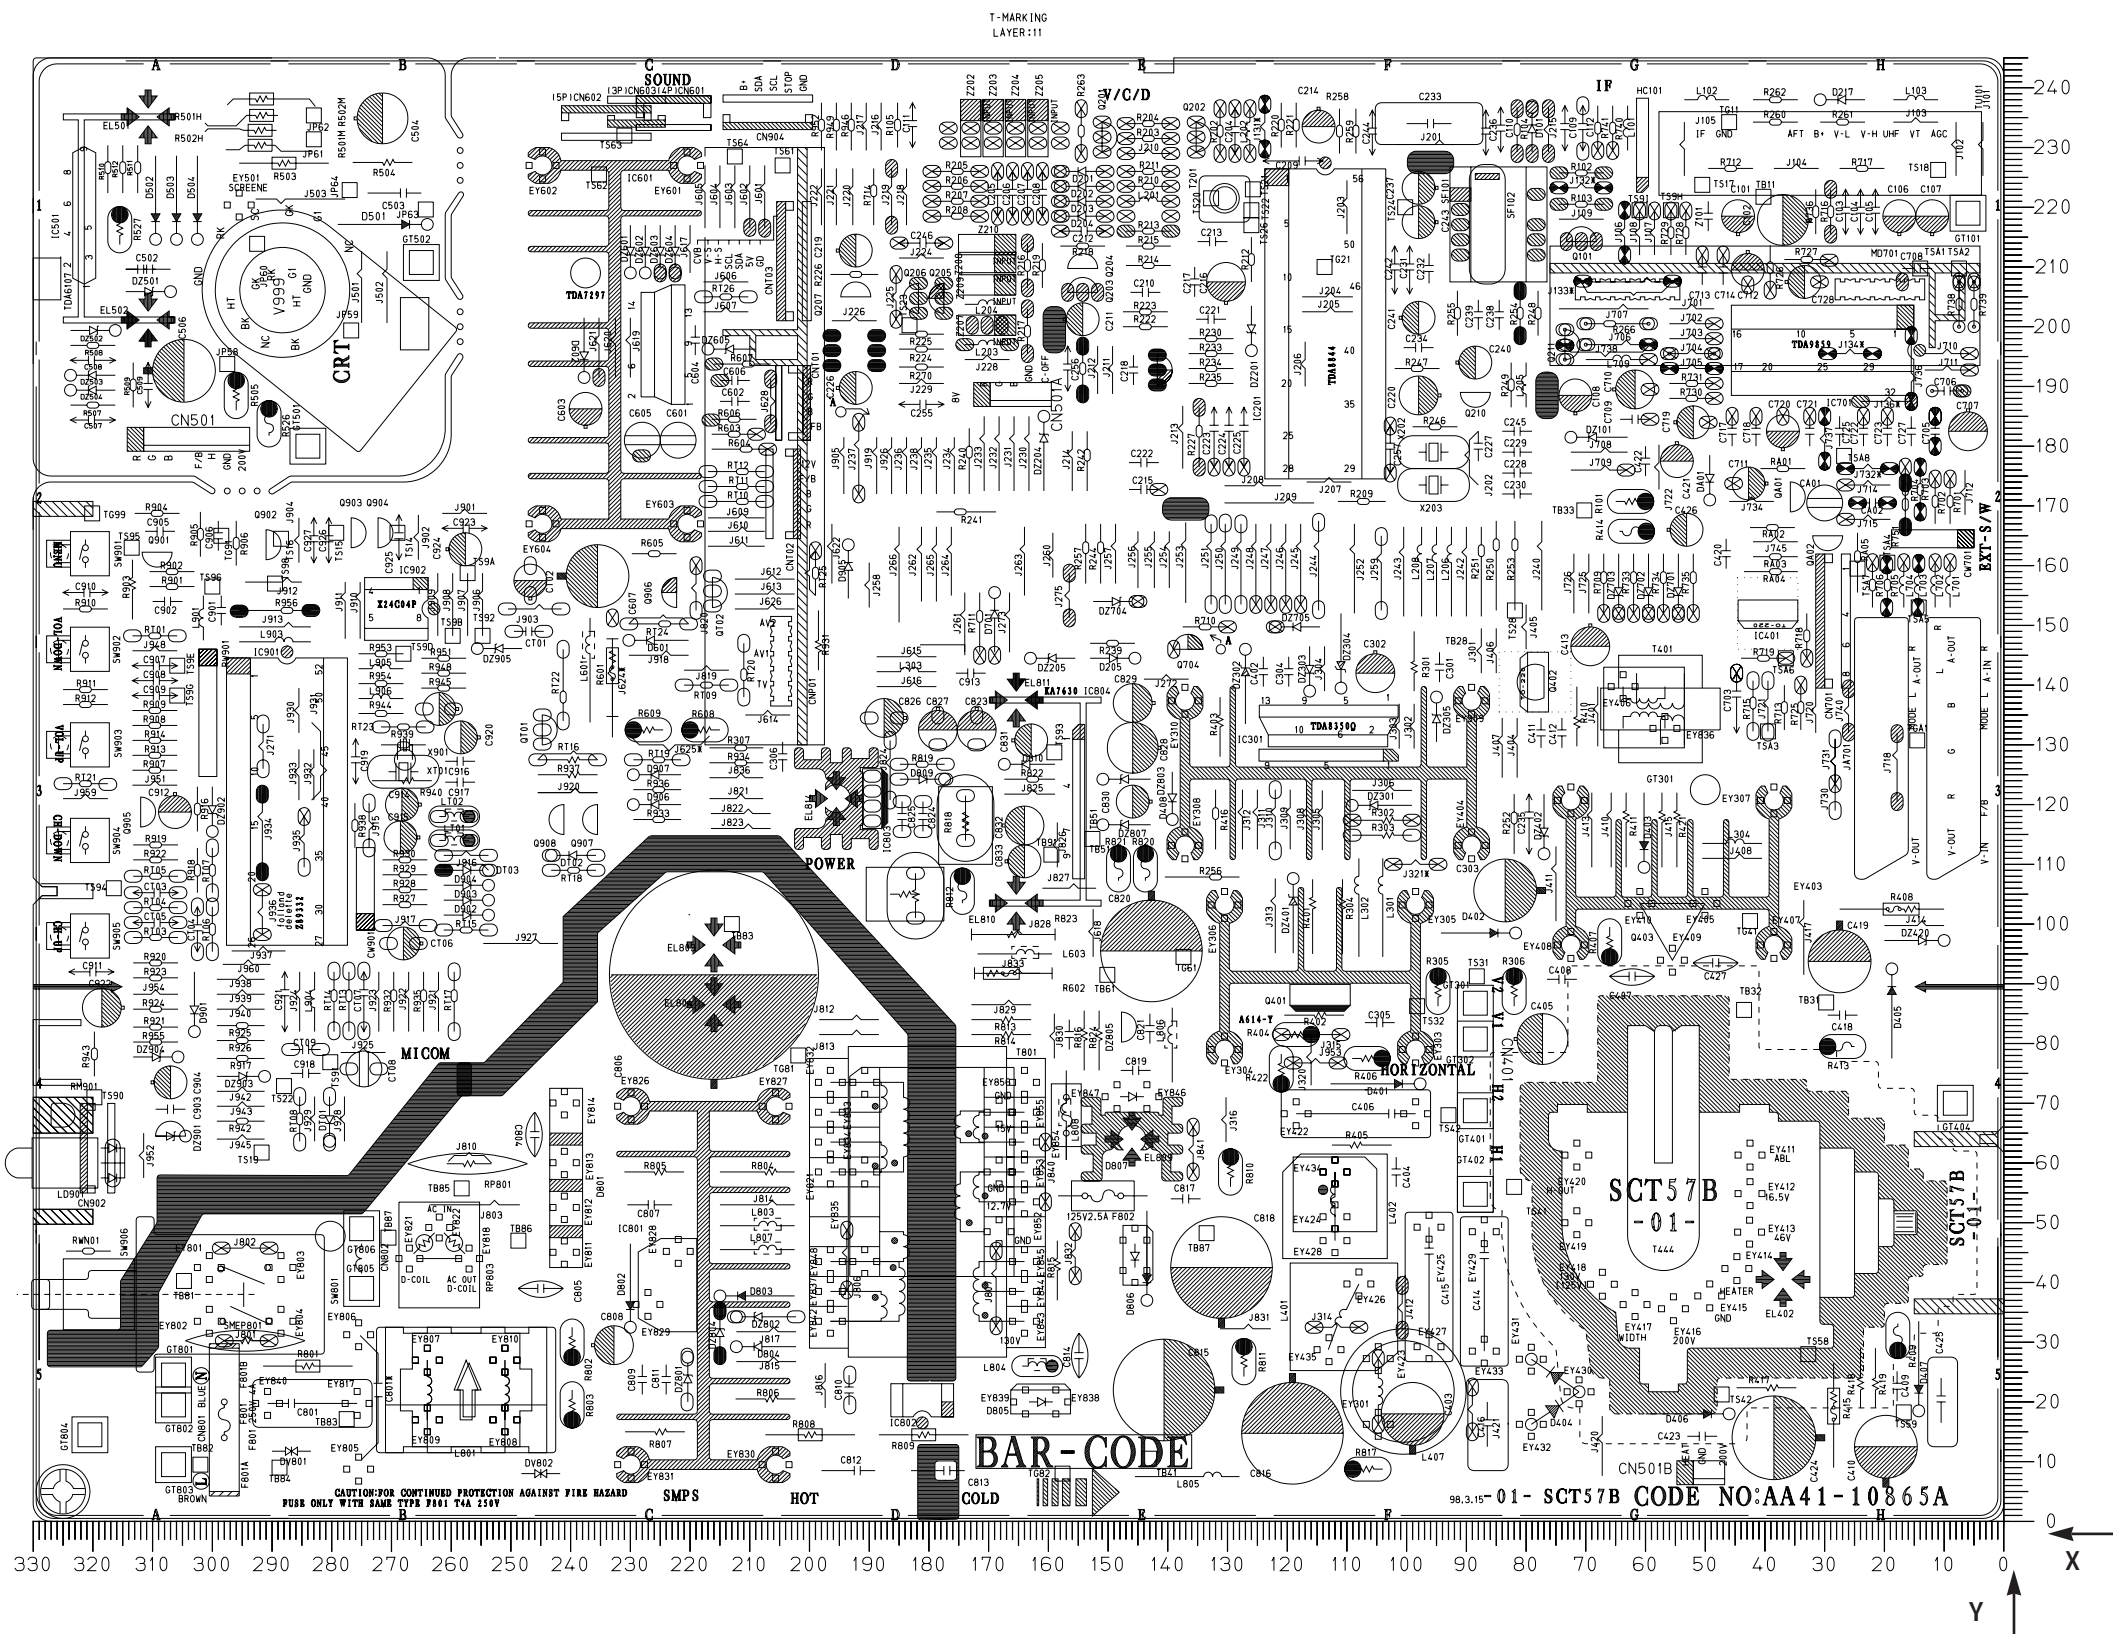


Loc. No.	X	Y	Loc. No.	X	Y
DIODE					
D101	79	236	DZ601	230	209
D201	158	226	DZ602	227	209
D202	158	223	DZ603	225	209
D203	158	221	DZ604	222	209
D204	158	218	DZ605	217	196
D205	145	144	DZ701	54	152
D217	30	238	DZ702	59	152
D401	97	73	DZ703	64	152
D402	81	98	DZ704	145	154
D403	60	109	DZ705	122	149
D404	79	16	DZ801	220	27
D405	18	92	DZ802	212	34
D406	46	18	DZ803	150	124
D407	14	18	DZ804	215	35
D408	139	117	DZ805	147	80
D501	264	217	DZ807	150	116
D502	309	214	DZ901	304	64
D503	306	214	DZ902	300	115
D504	302	214	DZ903	291	74
D601	230	147	DZ904	305	77
D602	237	191	DZ905	255	146
IC					
D701	169	155	HC101	60	224
D801	241	45	IC201	105	224
D802	230	32	IC301	137	137
D803	215	37	IC401	42	152
D804	212	29	IC501	310	201
D805	158	20	IC601	220	227
D806	143	37	IC701	17	190
D807	146	64	IC801	229	9
D809	177	124	IC802	185	19
D810	167	126	IC803	195	121
D901	303	82	IC804	165	137
D902	253	101	IC901	279	142
D903	253	104	IC902	265	148
D904	253	106			
D905	193	163			
D906	229	120	TRANSISTOR		
D907	229	125	Q101	68	214
DA01	49	171	Q201	151	229
DT01	280	63	Q202	135	229
DT02	243	111	Q203	151	205
DT03	253	109	Q204	151	209
DV801	290	11	Q205	177	207
DV802	241	8	Q206	181	207
DZ101	72	181	Q207	189	205
DZ201	126	196	Q210	91	189
DZ204	160	185	Q211	73	194
DZ205	163	144	Q401	98	79
DZ301	109	119	Q402	78	143
DZ302	127	146	Q403	38	96
DZ303	116	139	Q704	134	146
DZ304	111	139	Q901	311	162
DZ305	95	138	Q902	291	161
DZ401	119	107	Q903	276	163
DZ402	77	111	Q904	272	163
DZ420	10	97	Q905	312	116
DZ421	188	193	Q906	222	158
DZ501	307	205	Q907	235	120
DZ502	316	199	Q908	241	120
DZ503	323	191	Q909	141	190
DZ504	323	189	OA01	35	169
			OA02	32	165

10. Wiring Diagram

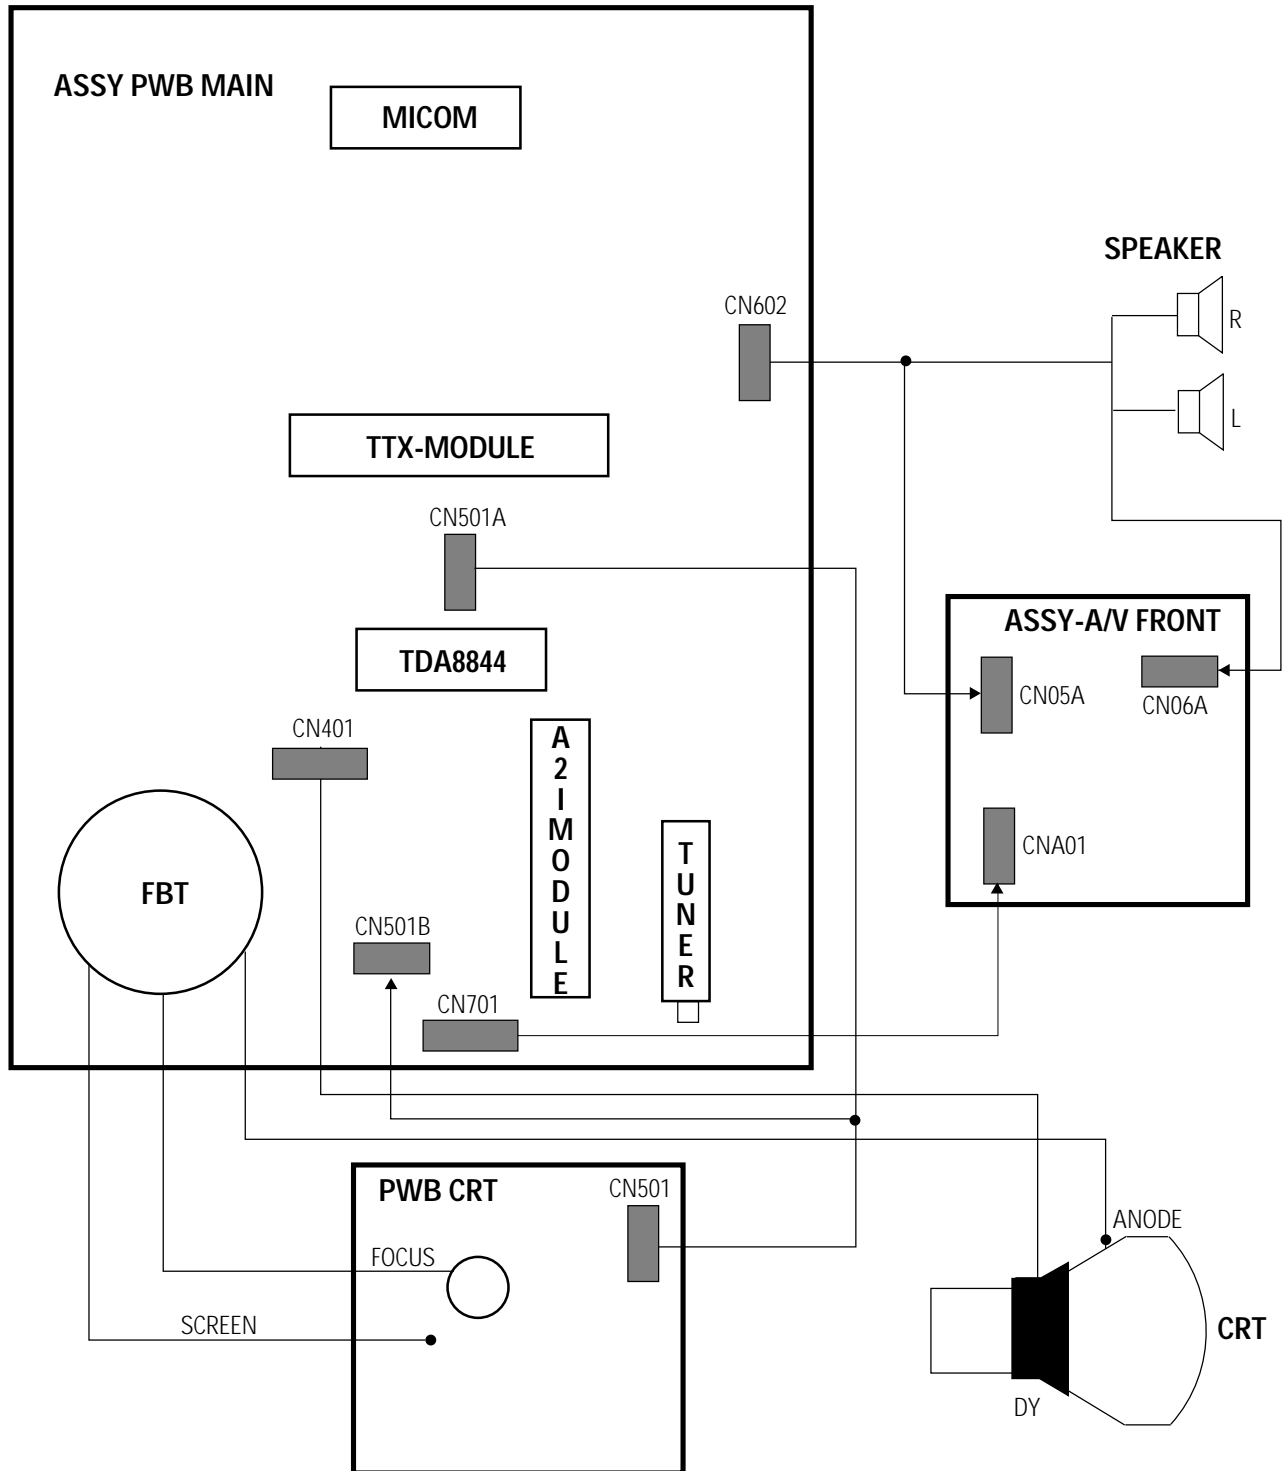


11. Schematic Diagrams


11-1 MAIN-POWER

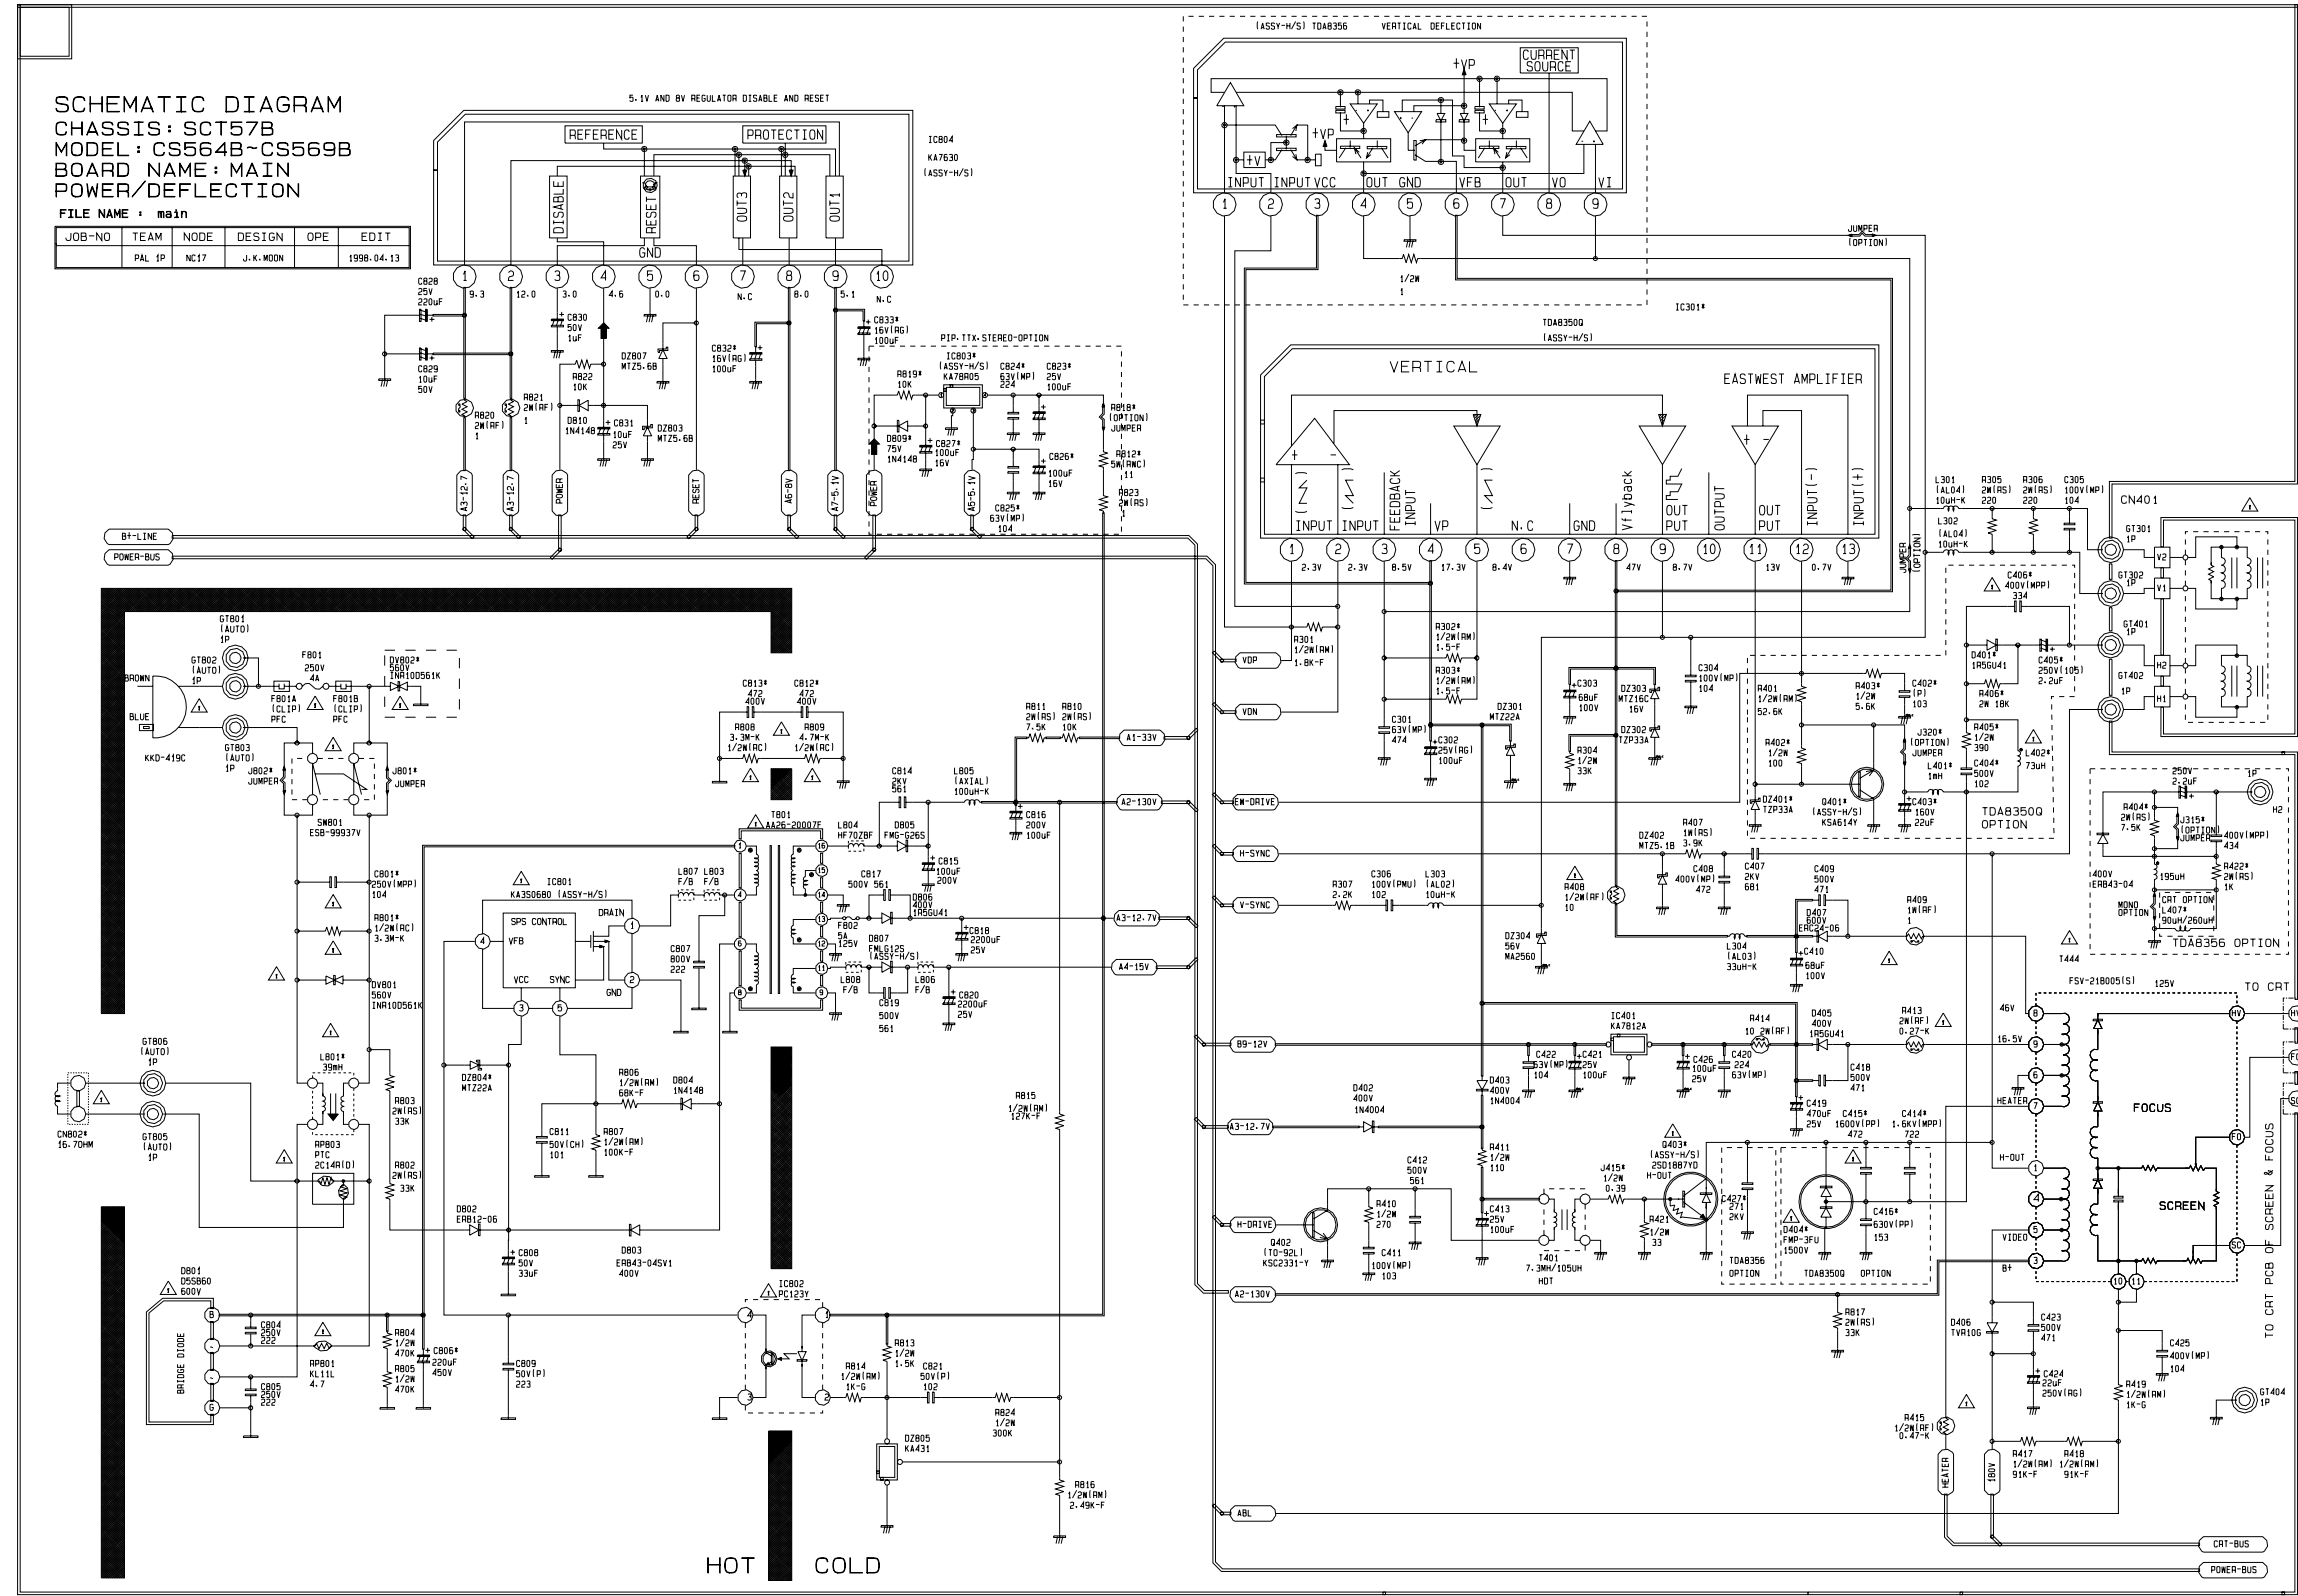


11-2 MAIN-CHROMA

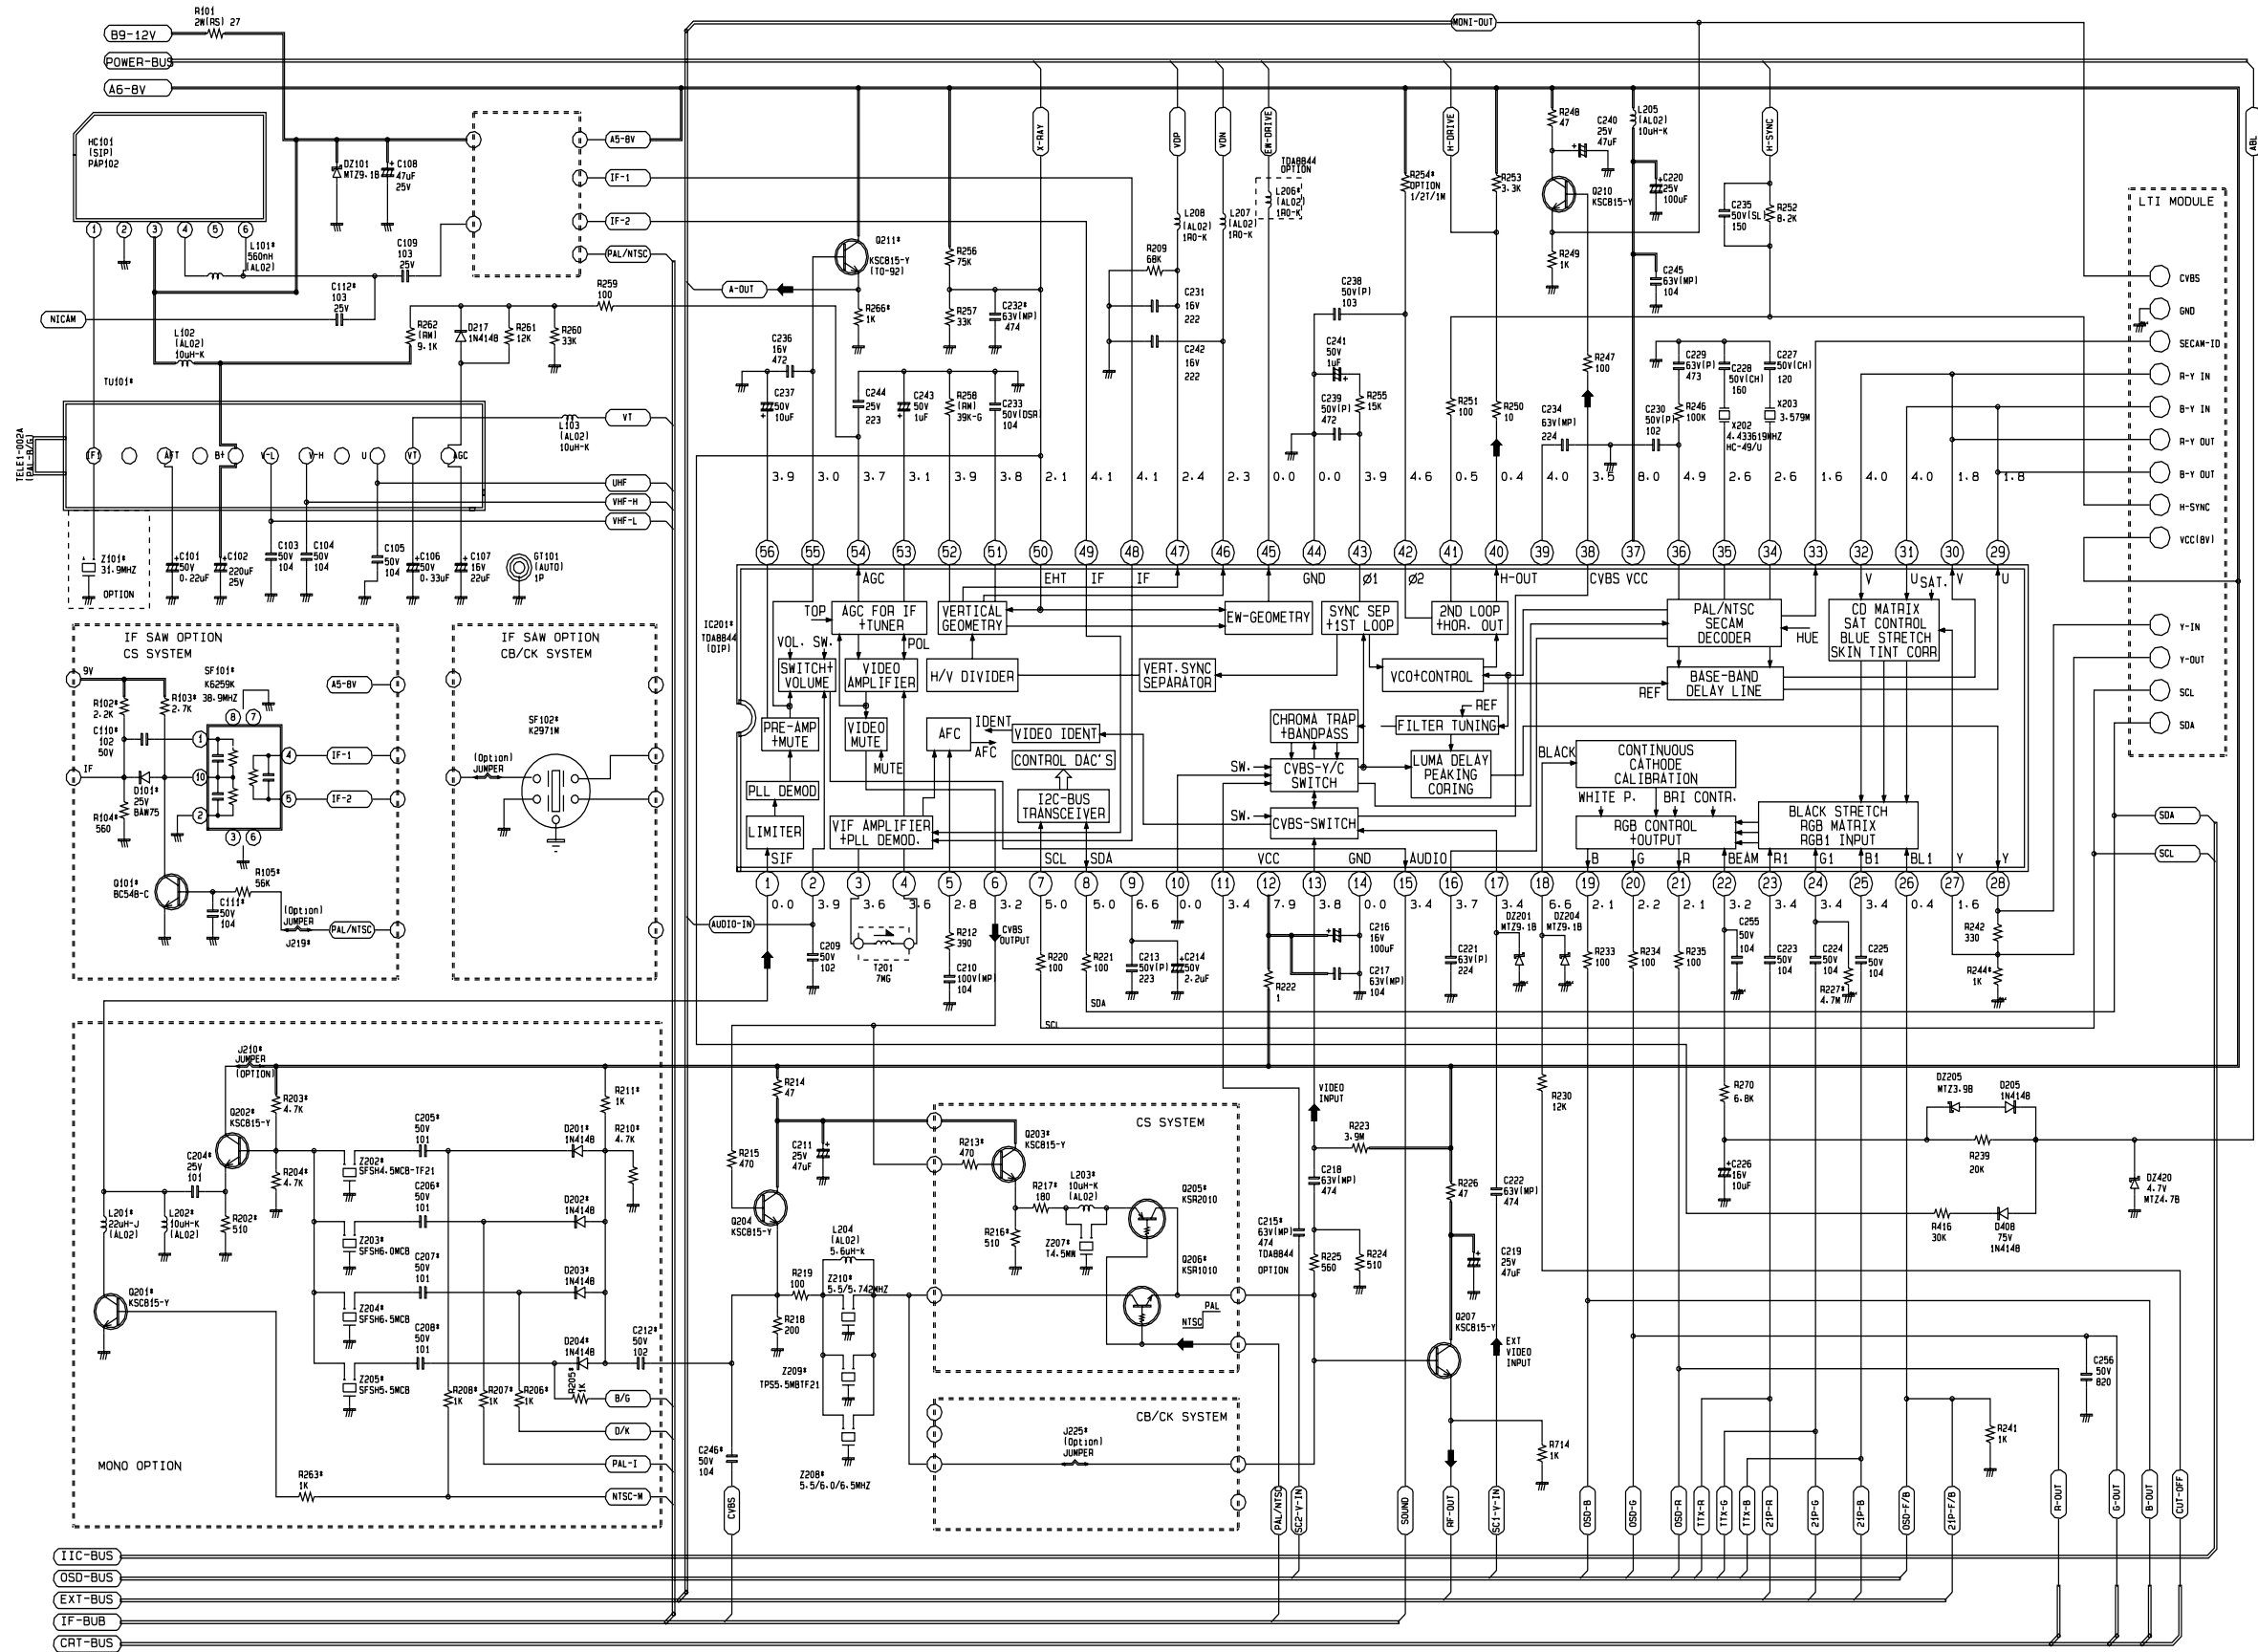

11-3 MAIN-AUDIO

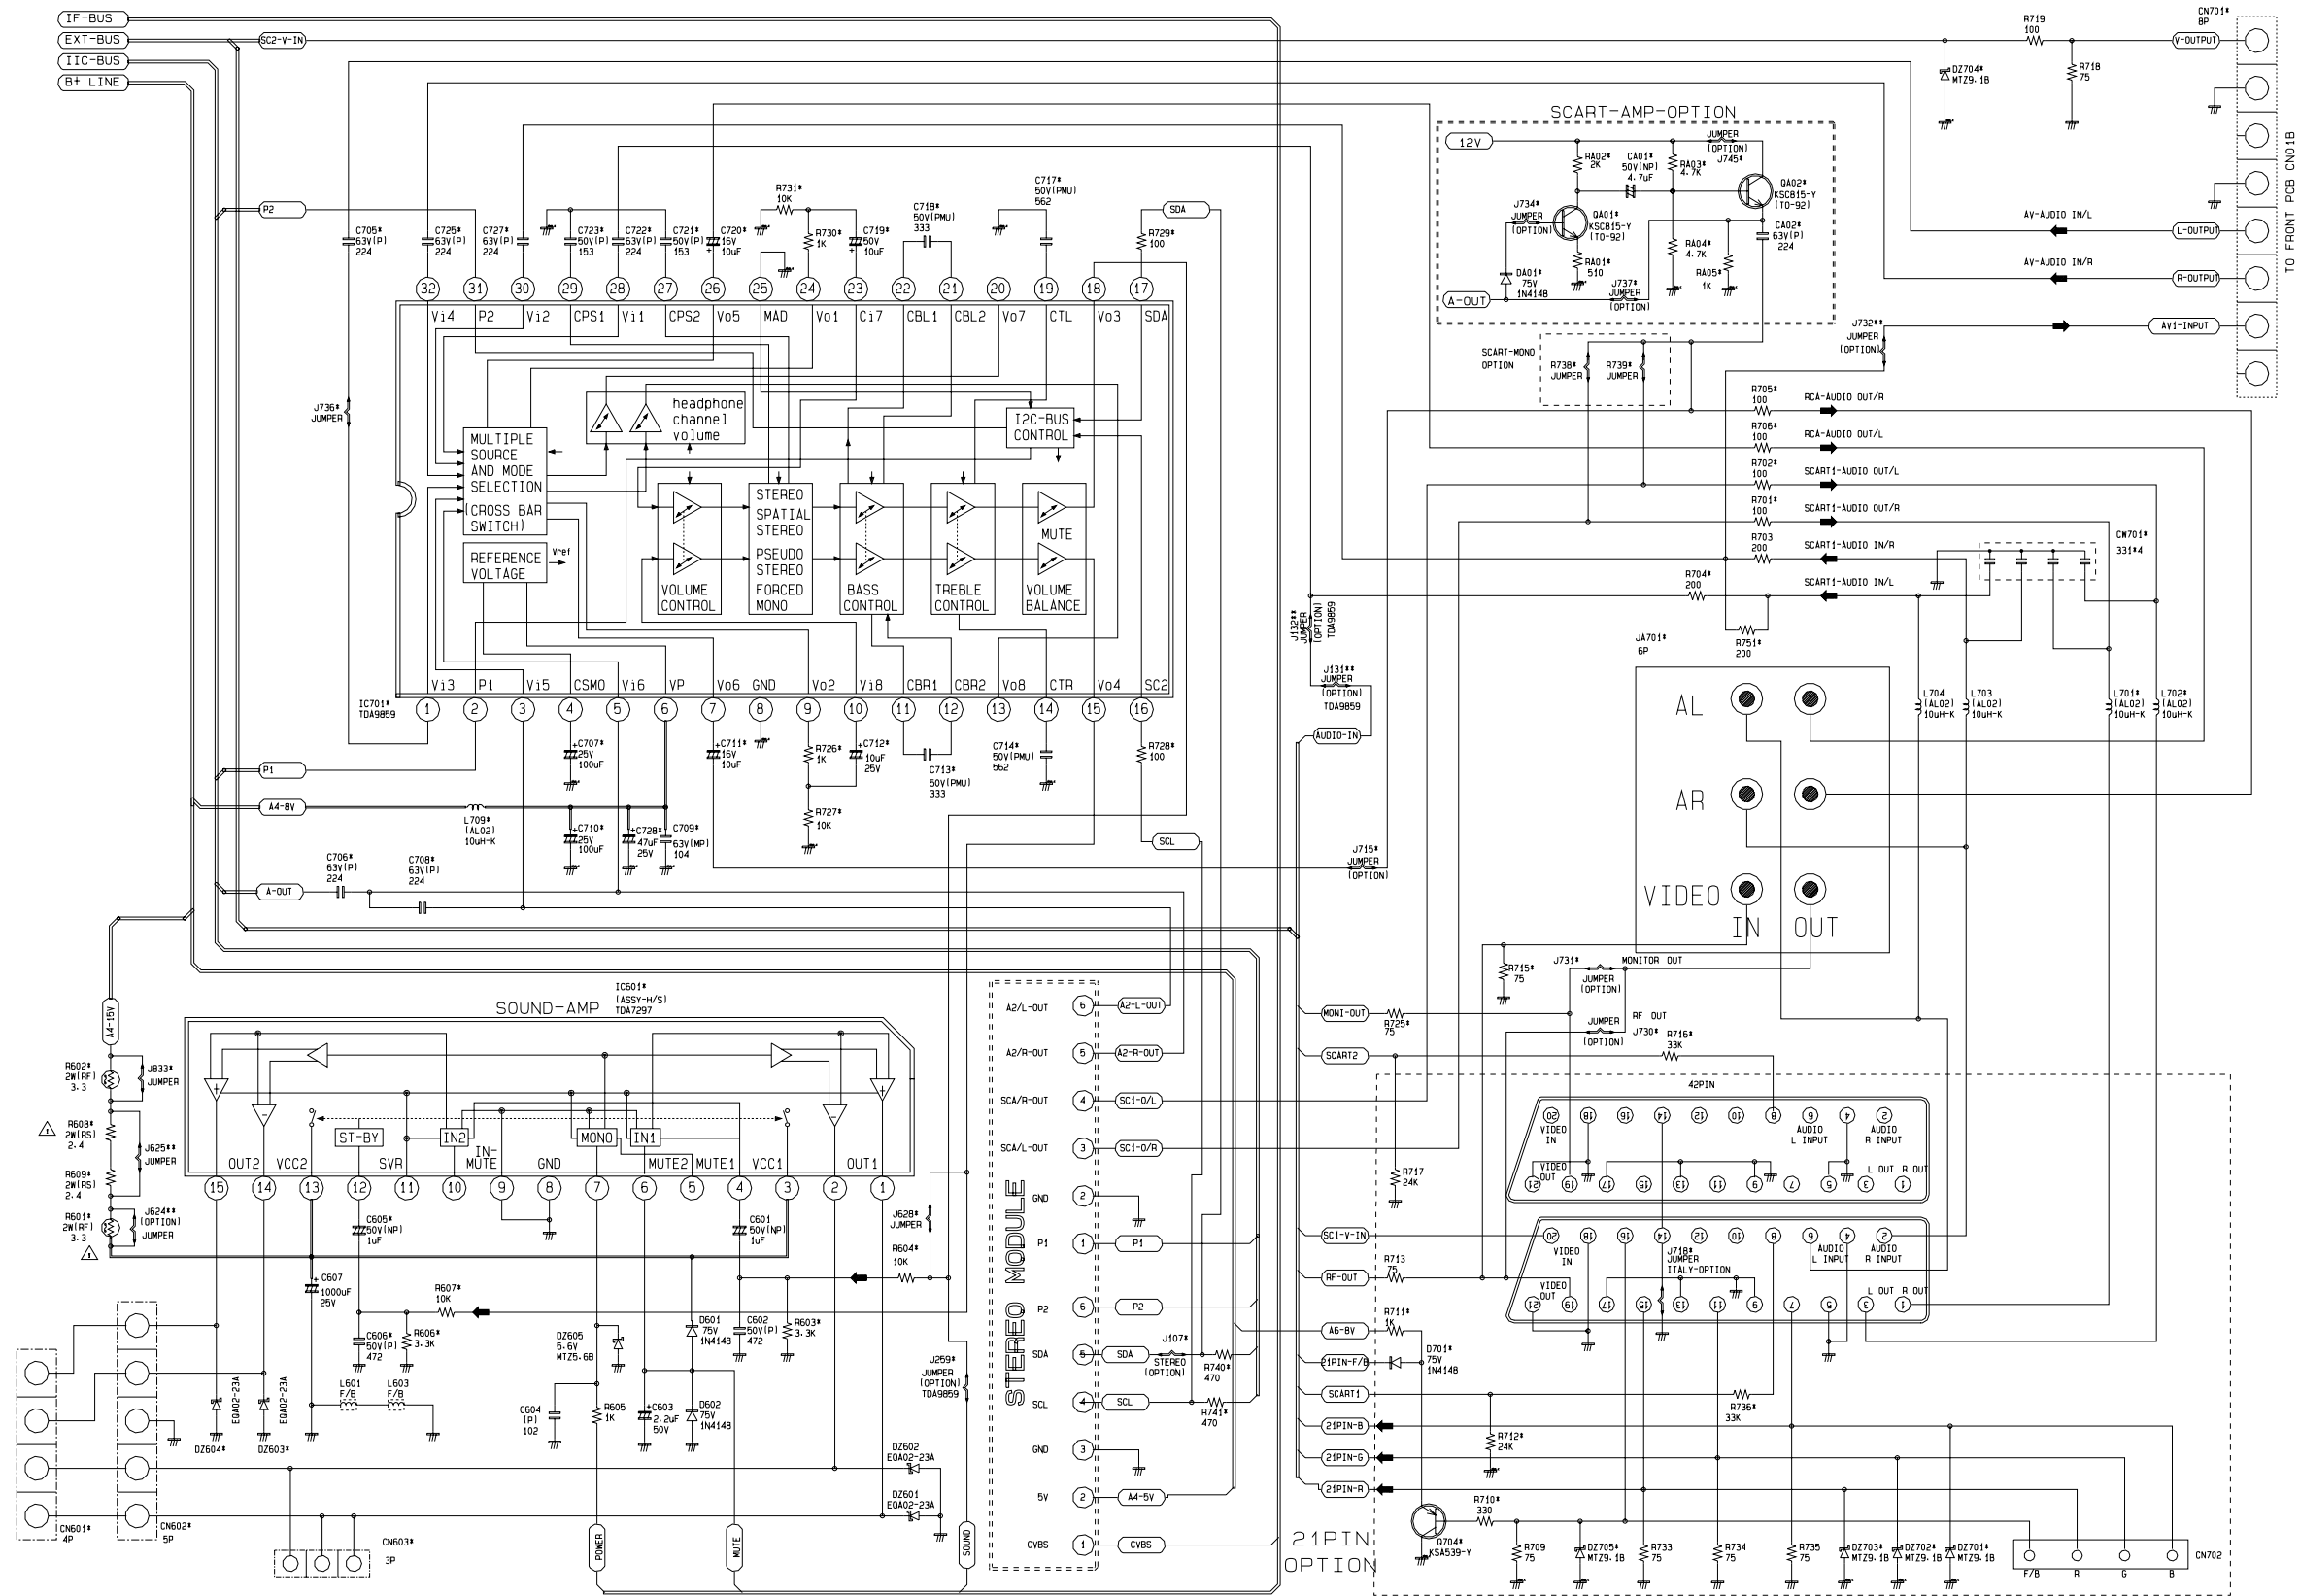


11-4 MAIN-U-COM

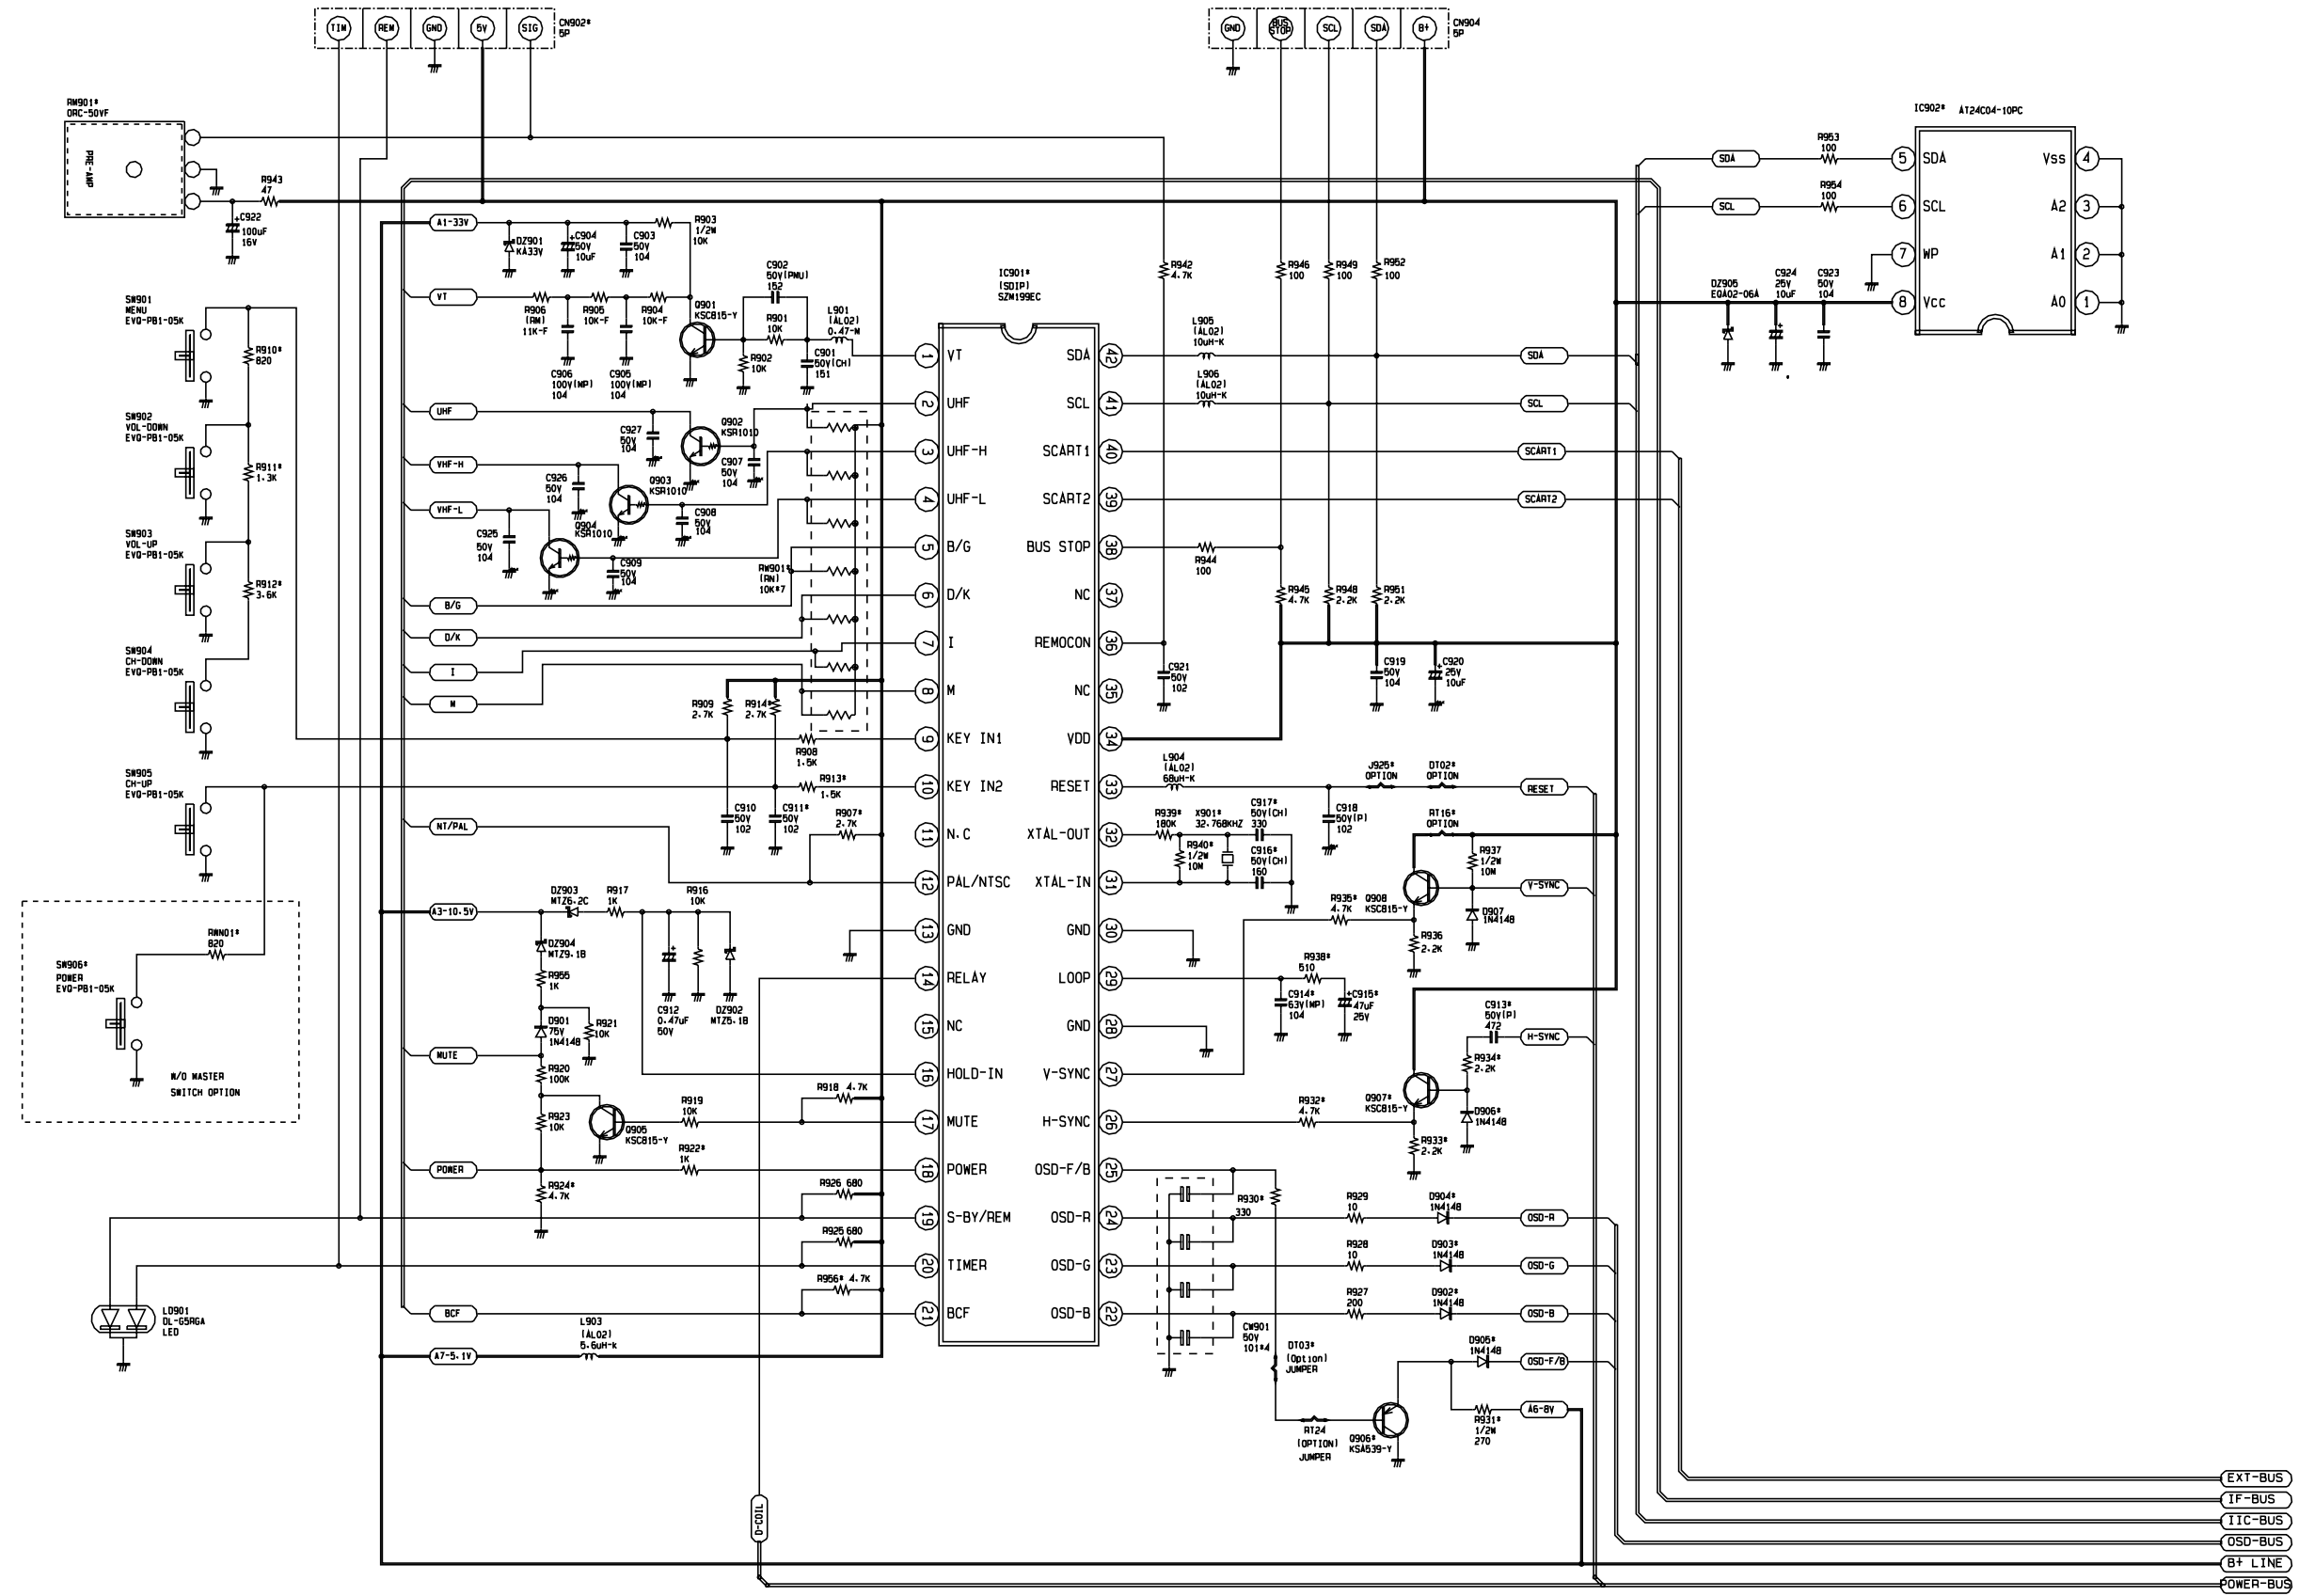


11-5 MAIN-CRT

CRT-BUS

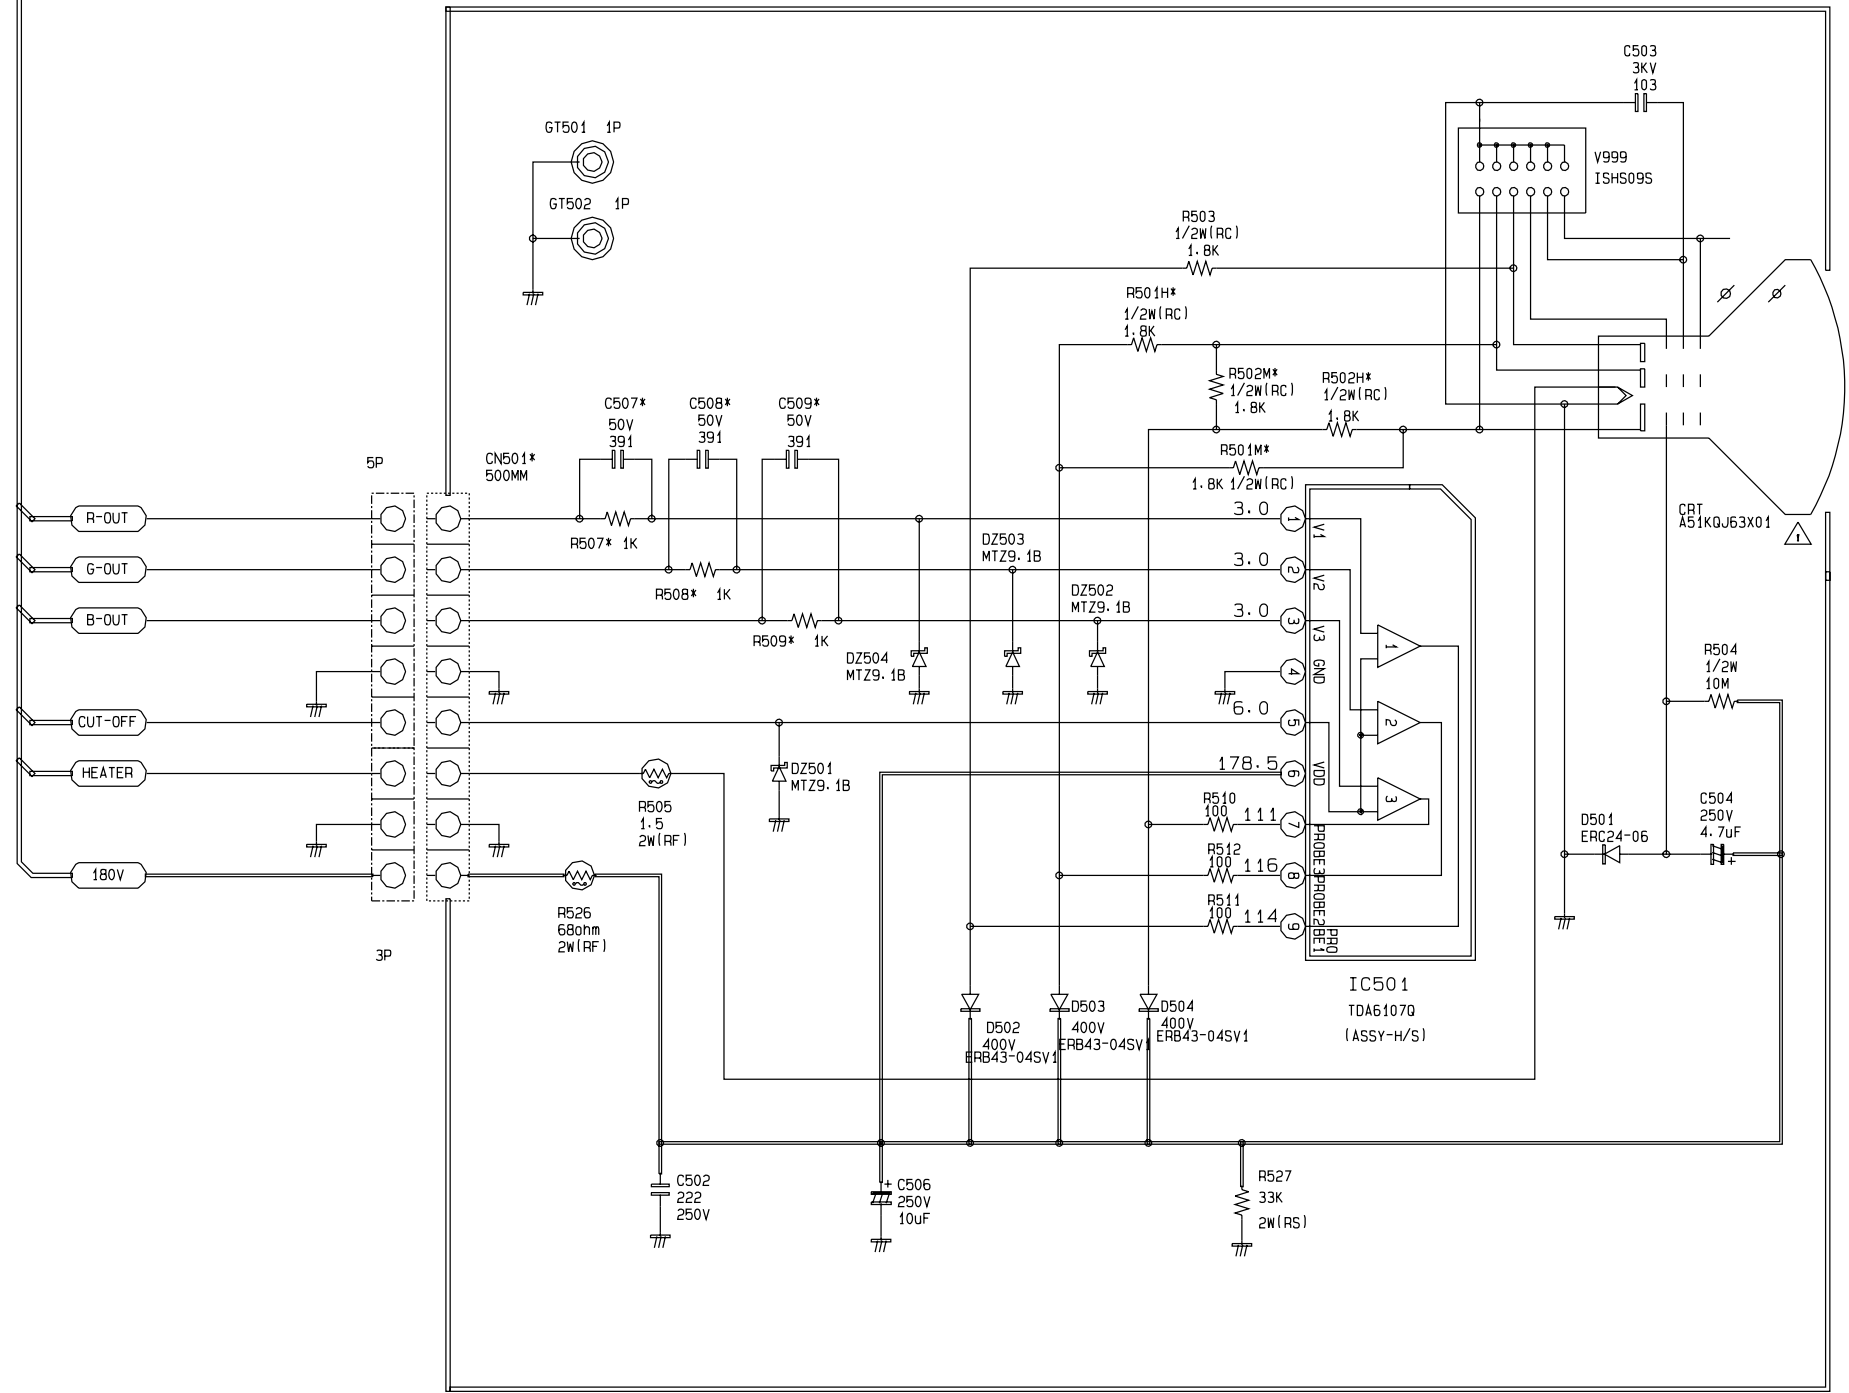

11-6 STEREO SIF

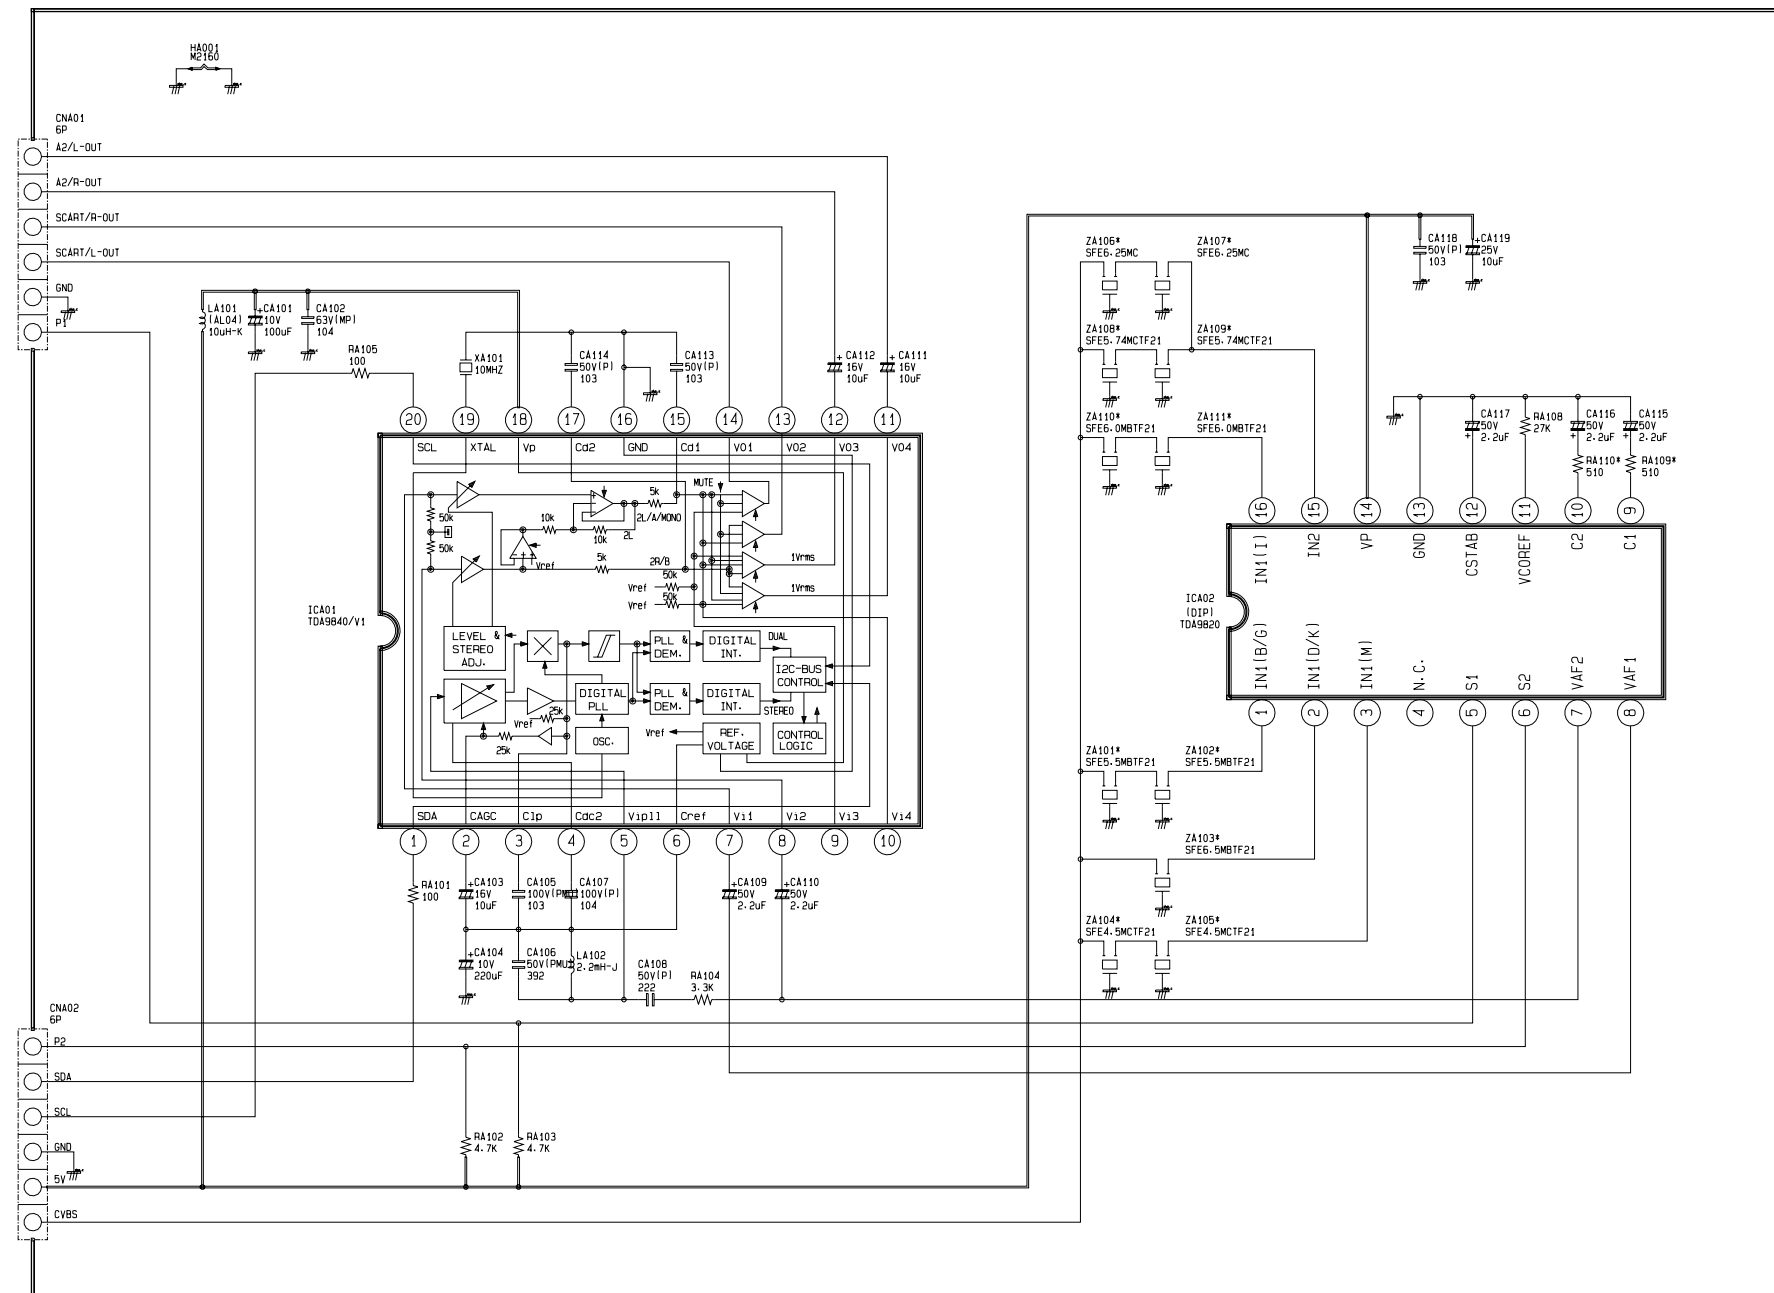

LOGIC TABLE

STANDARD	P1 PIN5	P2 PIN6	FREQUENCY VCO1	FREQUENCY VCO2
B/G	1	1	5.5MHZ	5.74MHZ
NTSC-M	1	0	4.5MHZ	
PAL-I	0	1	6.0MHZ	
D/K	0	0	6.5MHZ	6.25MHZ


CAPACITOR	
Ceramic - SL	No Mark
Ceramic - RH	(RH)
Ceramic - CH	(CH)
Polyester(Induct)	(P)
Polyester(Noninduct)	(PMU)
Polypropylene	(PP)
Metal Polyester	(MP)
M.P.Polypropylene	(MPP)
Tantalum	(T)
Non Polar	(NP)

RESISTOR	
Carbon	No Mark
Composition	(RC)
Metal Oxide	(RS)
Metal Film	(RM)
Fusible	(RF)
Cement-Wire	(RW)
Network	(RN)

EXPRESSION
 1 Resistance is shown ohm K=1,000 M=1,000,000
 2 Unless otherwise noted in schematic all capacitor values less than 1 are expressed in ufd. the values more than 1 in pf.
 3 Unless otherwise noted in schematic all inductor values are expressed in uH and the values less than 1 in mH.

NOTE
 The circuits are subject to change without notice to improve the picture quality.

11-7 MAIN-NICAM

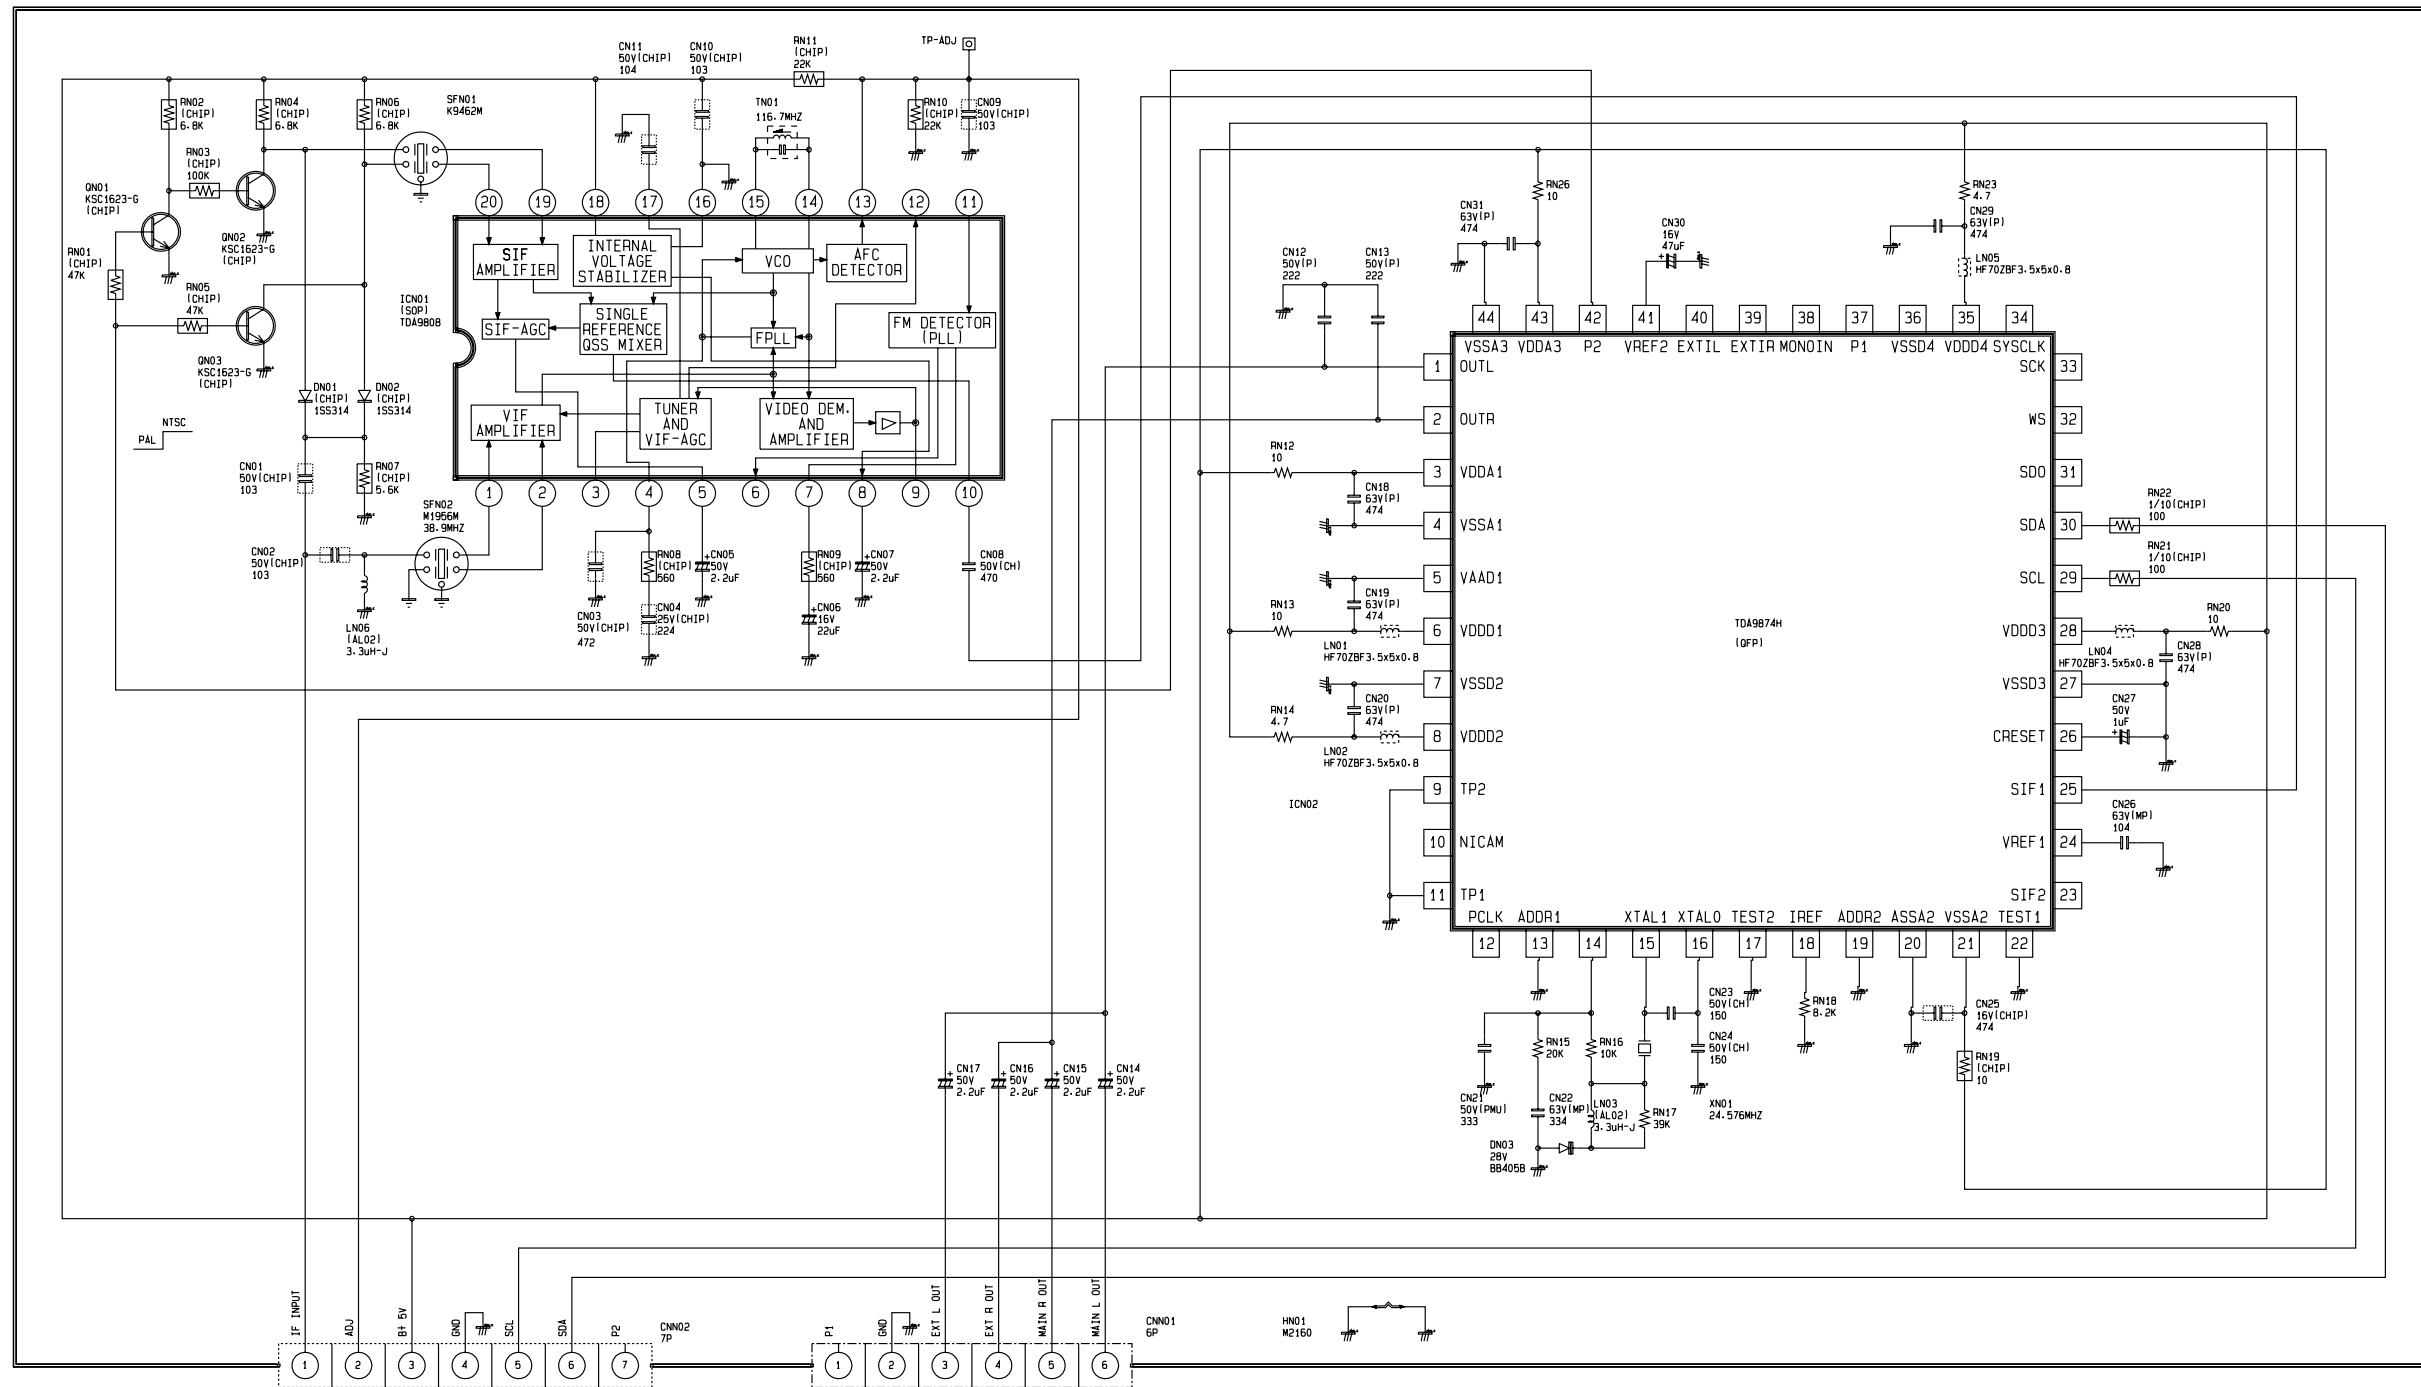

CAPACITOR	
Ceramic - SL	No Mark
Ceramic - RH	(RH)
Ceramic - CH	(CH)
Polyester (Induct)	(P)
Polyester (Noninduct)	(PMU)
Polypropylene	(PP)
Metal Polyester	(MP)
M. P. Polypropylene	(MPP)
Tantalum	(T)
Non Polar	(NP)


RESISTOR	
Carbon	No Mark
Composition	(RC)
Metal Oxide	(RS)
Metal Film	(RM)
Fusible	(RF)
Cement-Wire	(RW)
Network	(RN)

EXPRESSION
 1 Resistance is shown ohm K=1,000 M=1,000,000
 2 Unless otherwise noted in schematic all capacitor values less than 1 are expressed in ufd. the values more than 1 in pf.
 3 Unless otherwise noted in schematic all inductor values are expressed in uH and the values less than 1 in mH.


NOTE
 The circuits are subject to change without notice to improve the picture quality.

SCHEMATIC DIAGRAM
 CHASSIS: SCT57B
 MODEL: CS565BN~CS569BN
 BOARD NAME: NICAM



11-8 PIP-TTX

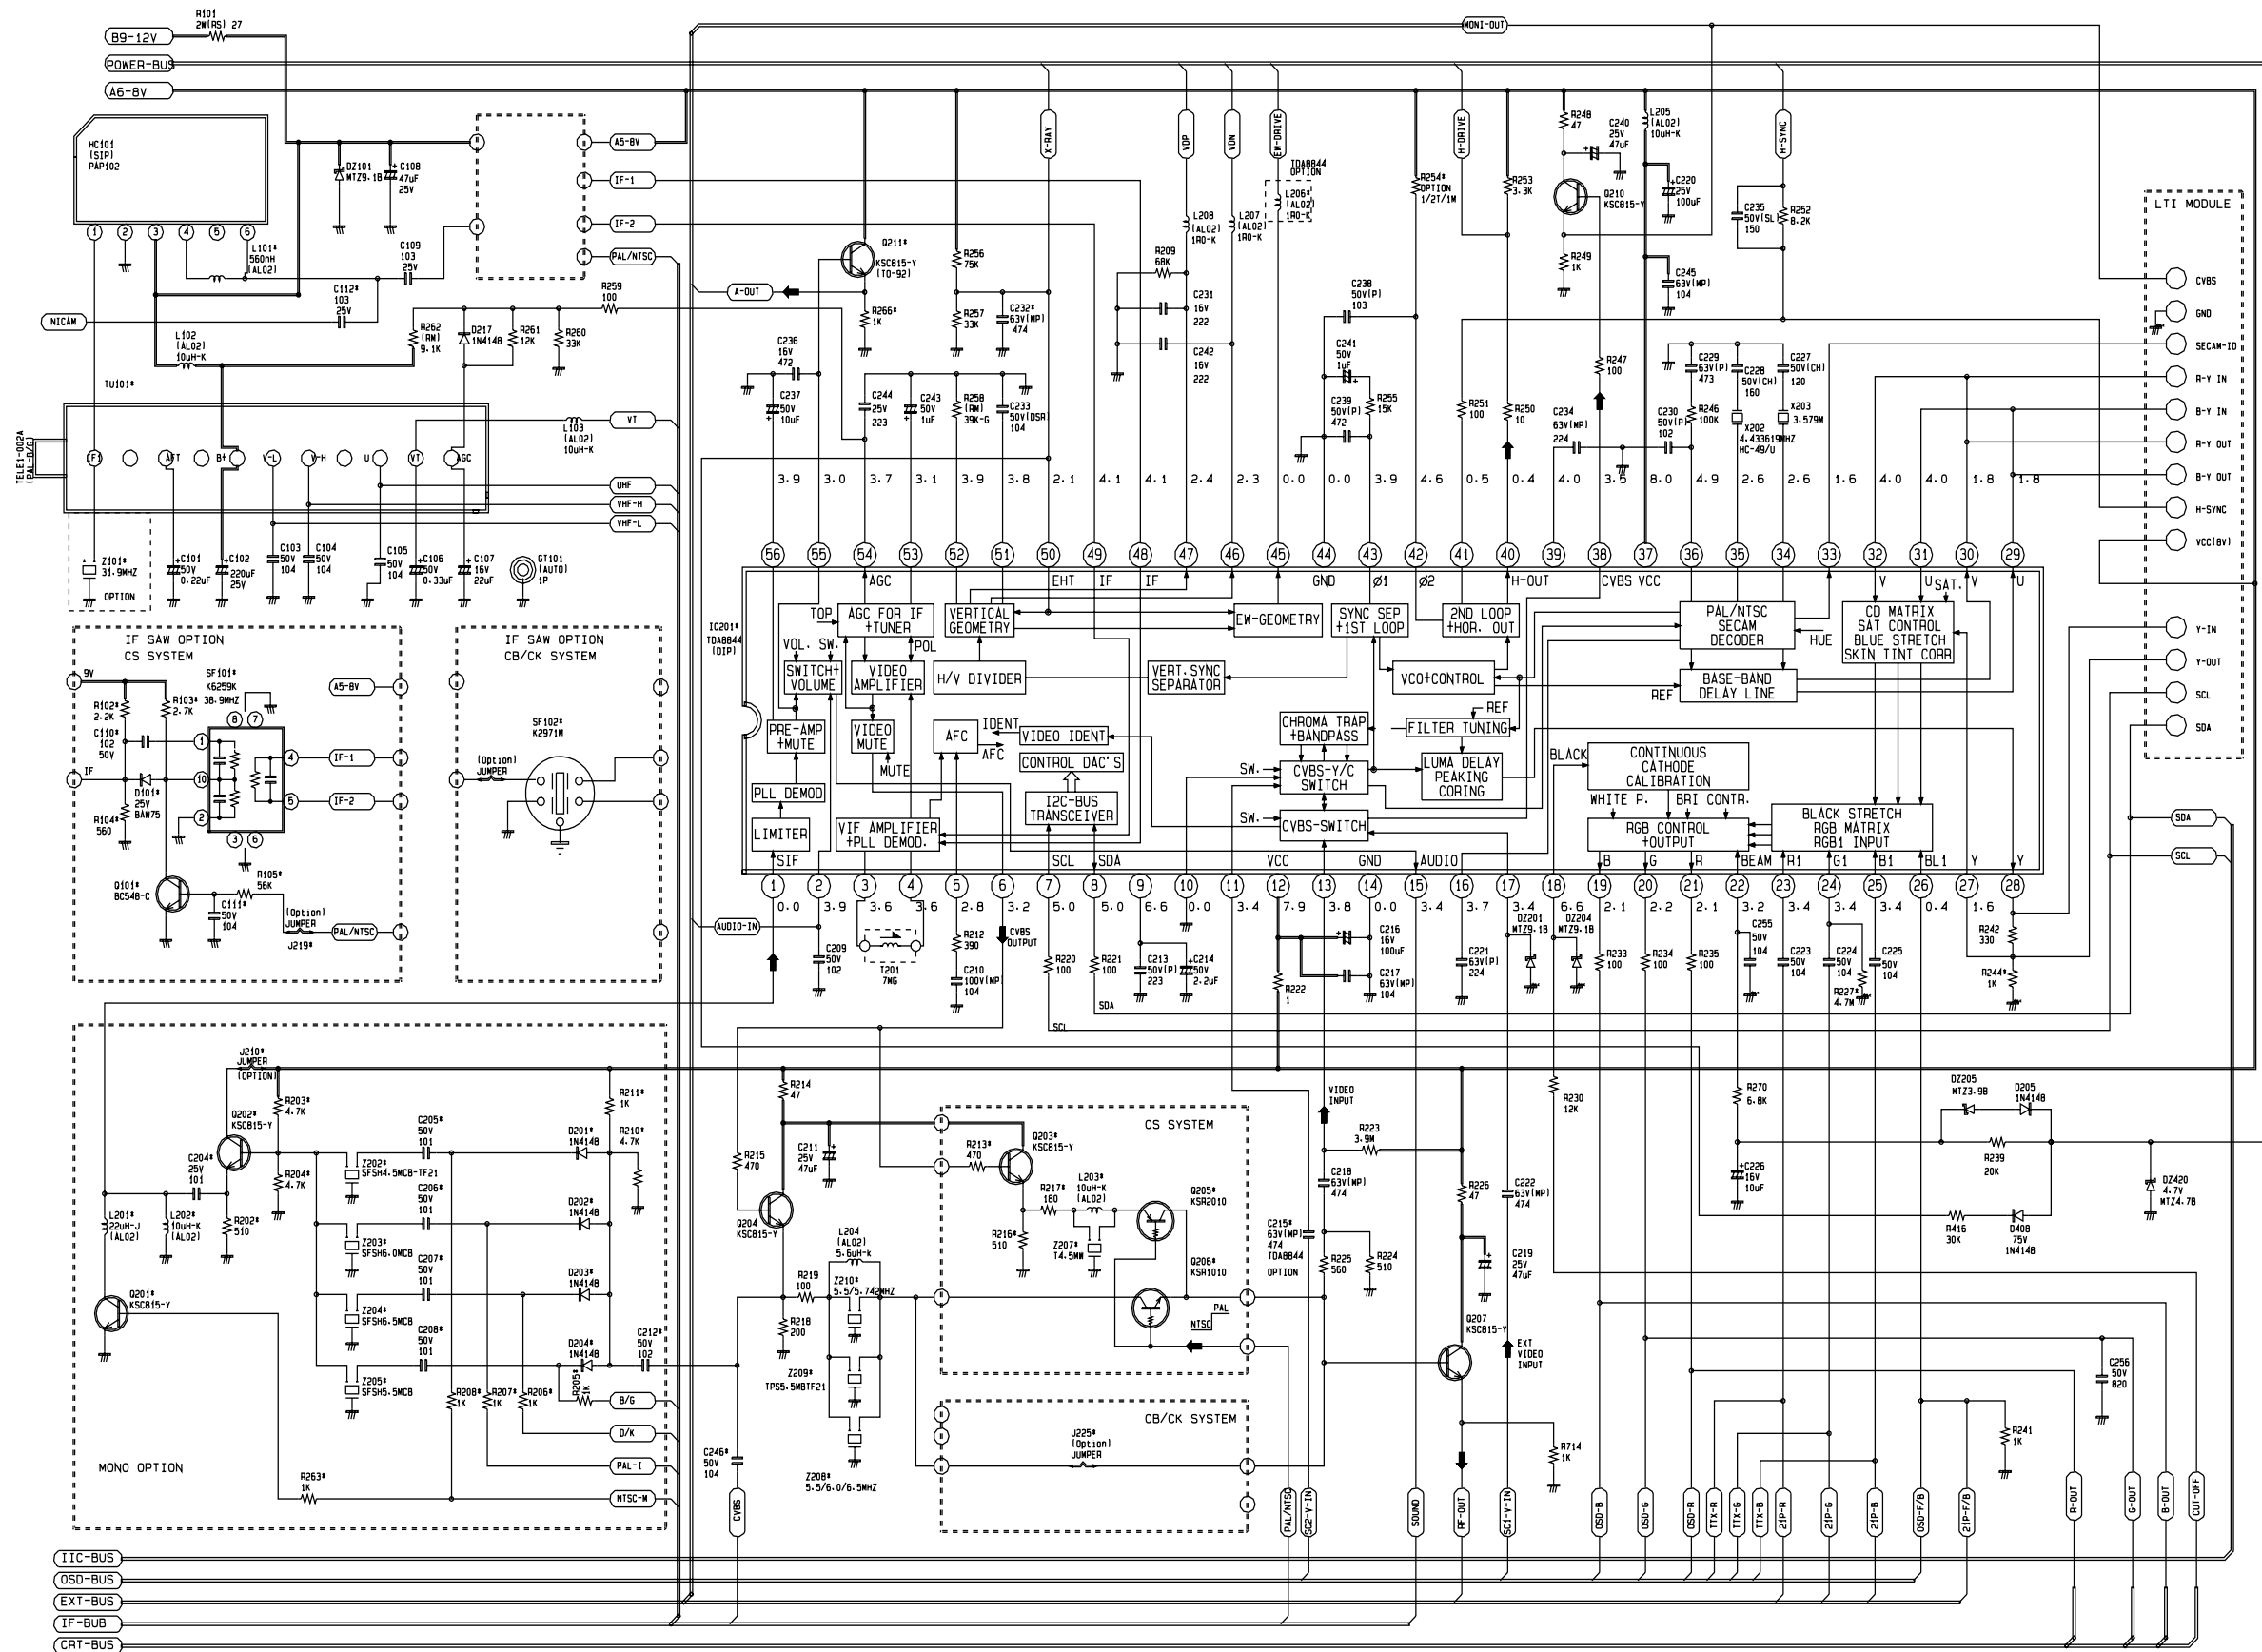

11-9 TTX OPTION

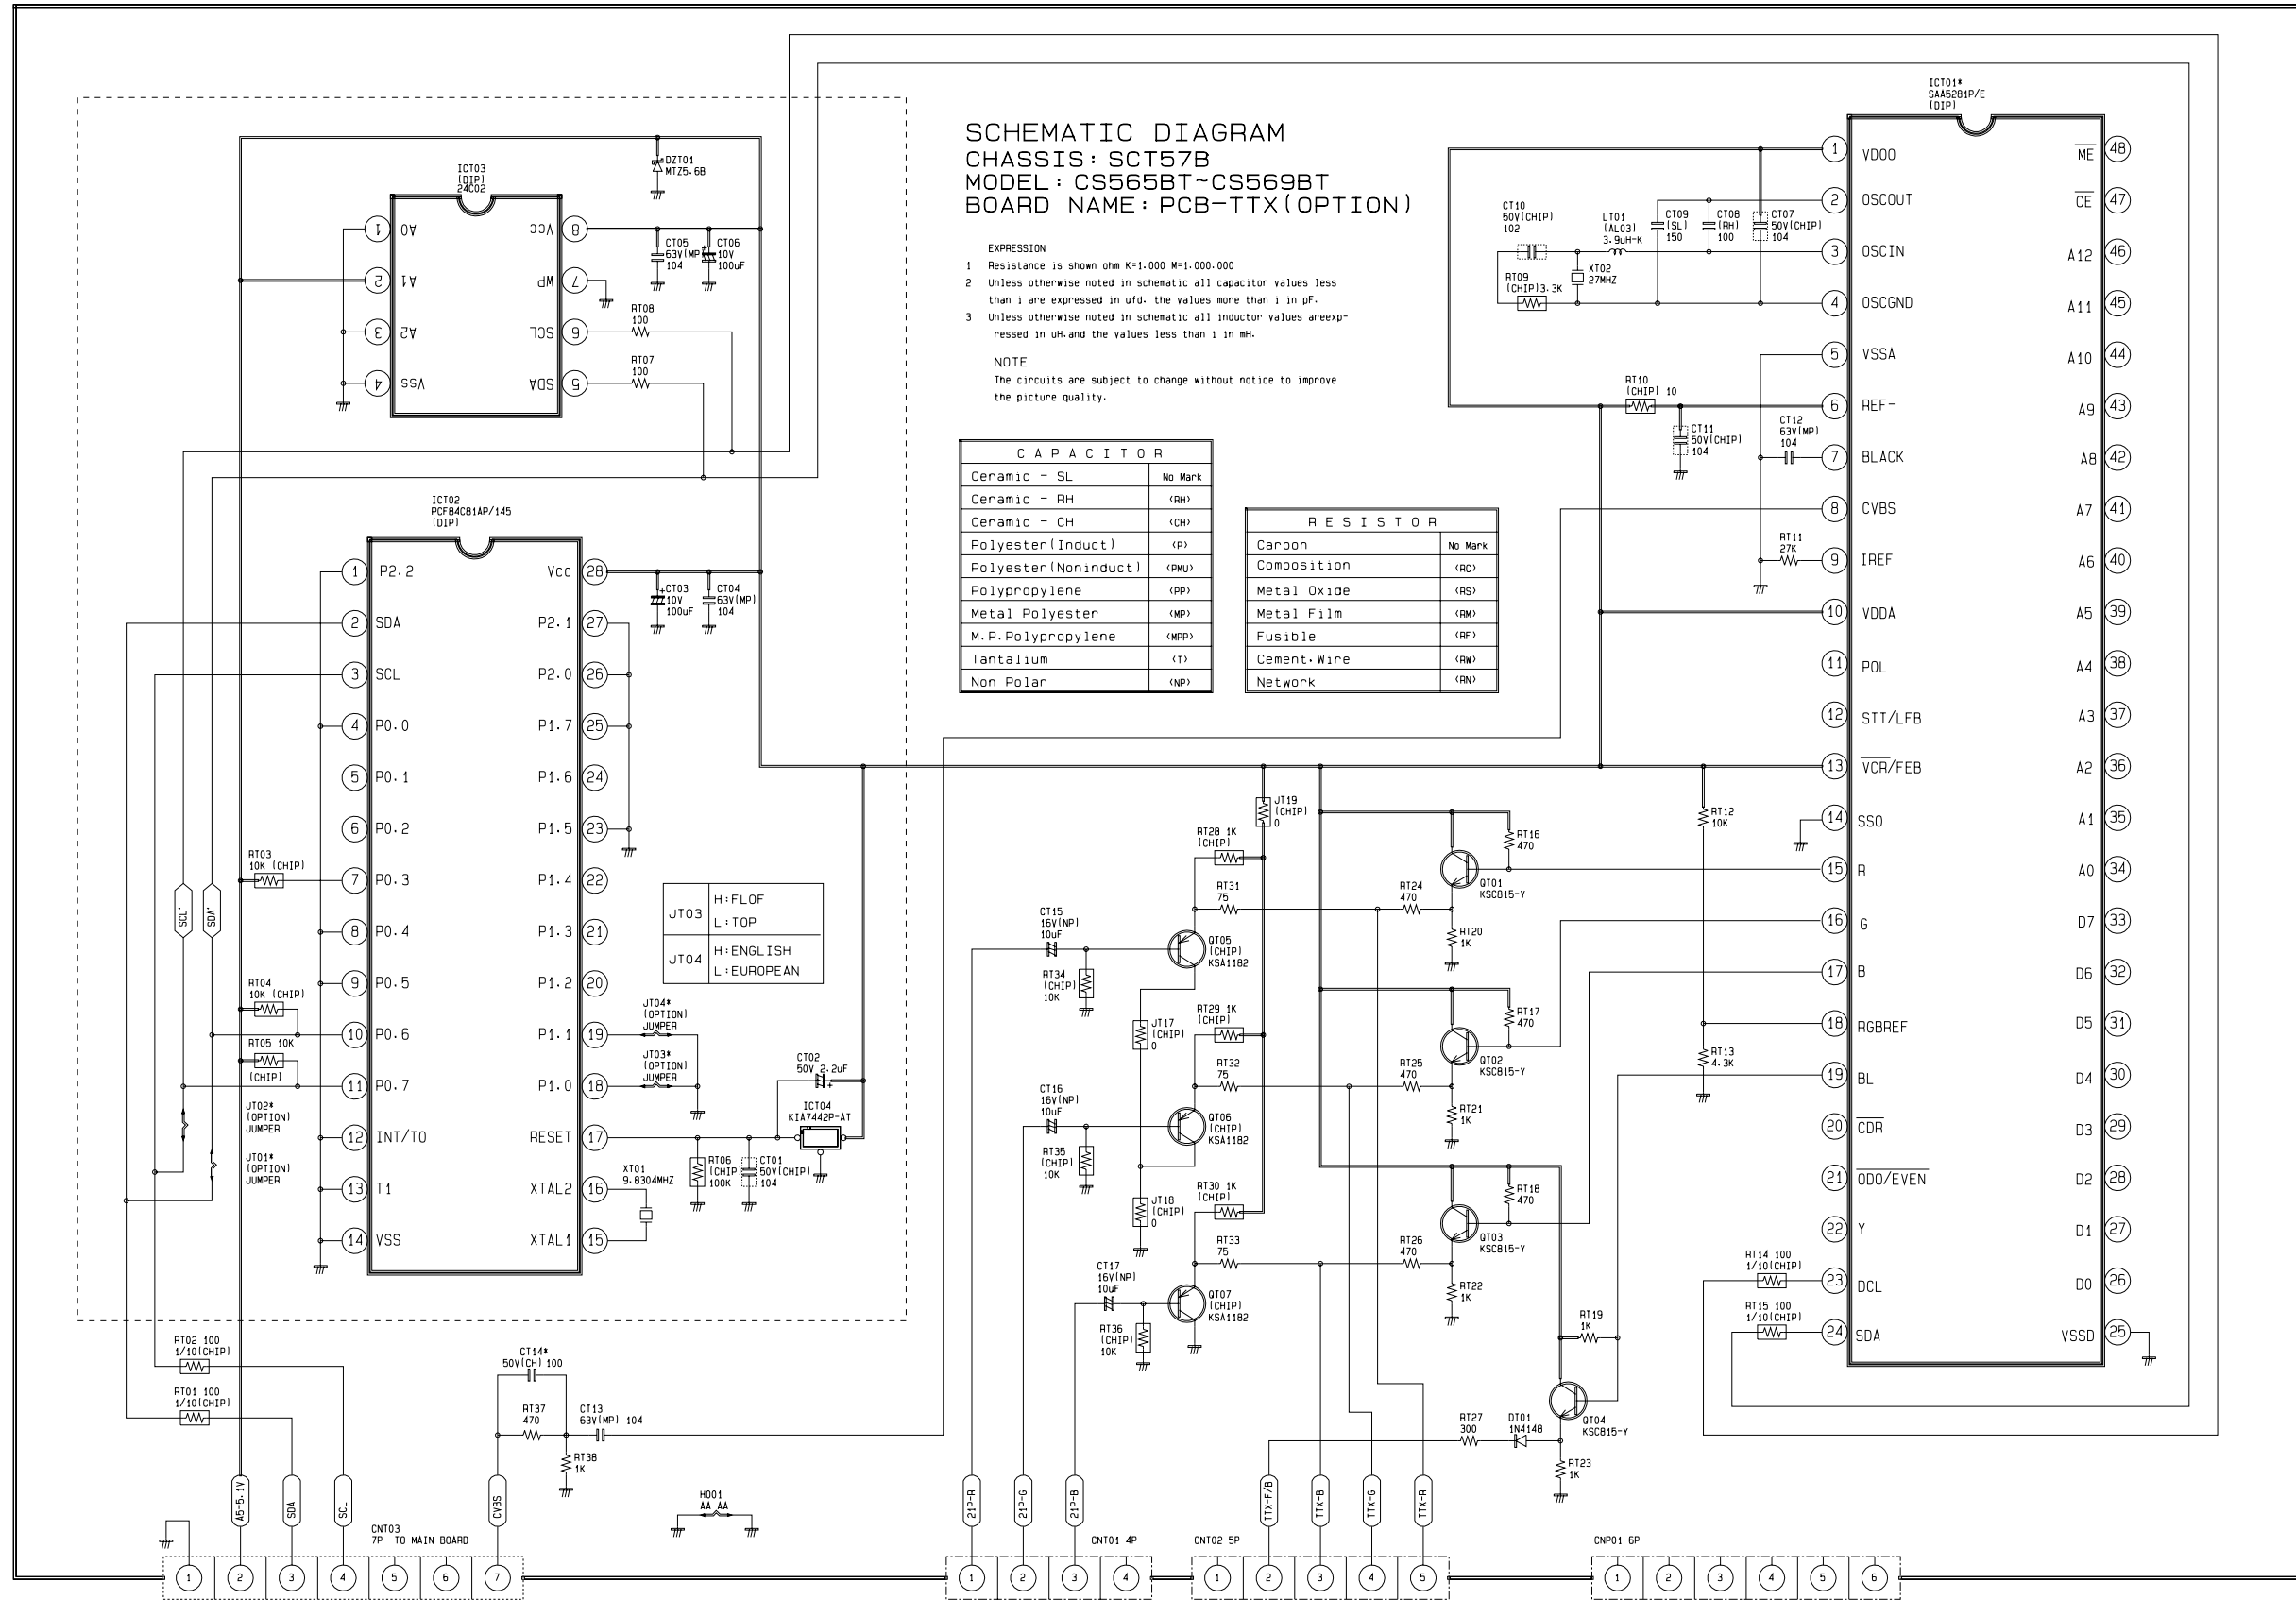

11-10 PCB-A/V

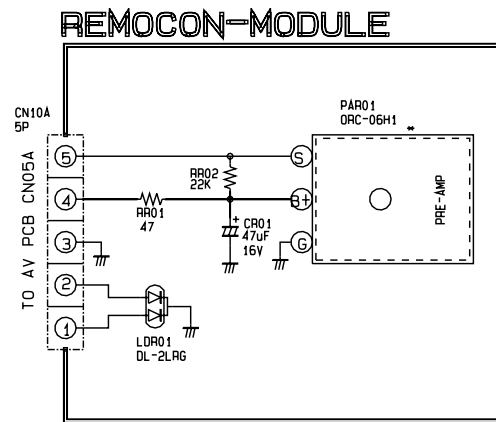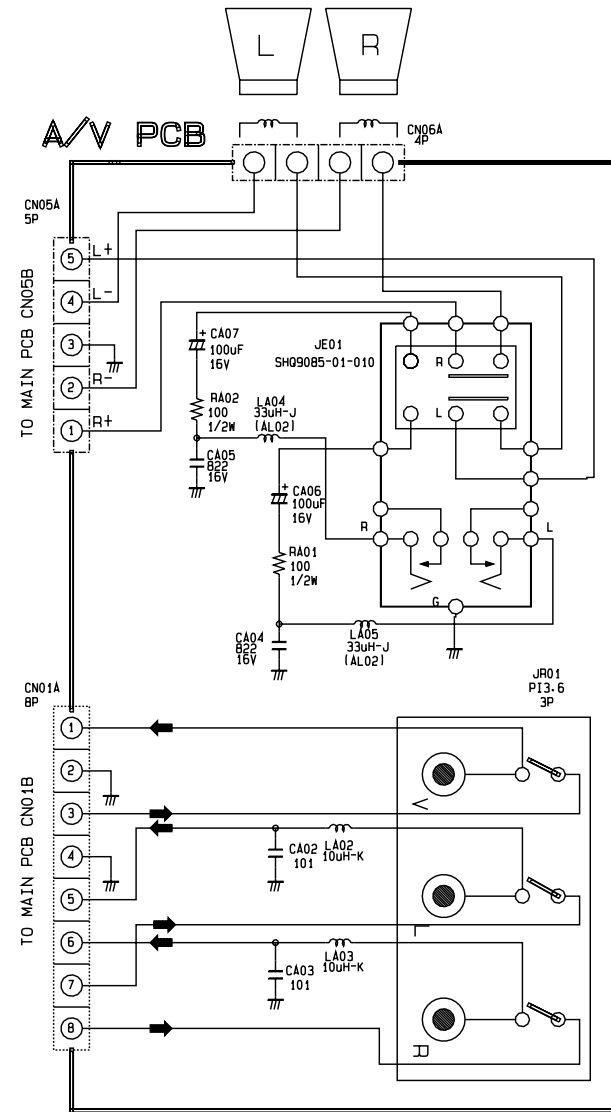

EXPRESSION

- 1 Resistance is shown ohm K=1,000 M=1,000,000
- 2 Unless otherwise noted in schematic all capacitor values less than 1 are expressed in ufd. the values more than 1 in pF.
- 3 Unless otherwise noted in schematic all inductor values are expressed in uH and the values less than 1 in mH.

NOTE

The circuits are subject to change without notice to improve the picture quality.

RESISTOR	
Carbon	No Mark
Composition	<RC>
Metal Oxide	<RS>
Metal Film	<RM>
Fusible	<RF>
Cement-Wire	<RW>
Network	<RN>

CAPACITOR	
Ceramic - SL	No Mark
Ceramic - RH	<RH>
Ceramic - CH	<CH>
Polyester (Induct)	<P>
Polyester (Noninduct)	<PMU>
Polypropylene	<PP>
Metal Polyester	<MP>
M.P. Polypropylene	<MPP>
Tantalium	<T>
Non Polar	<NP>