



CE28B5-c


Colour Television Service Manual

Model No. CE28B5-C

Service Ref. No. CE28B5-C-01

PRODUCT CODE: 111357504
ORIGINAL VERSION: Chassis No. EB6-D

NOTE: Do **NOT** refer to CE28B5-C-00. Only use the information contained in this manual. Refer to schematic diagram for CE28B5-C-01

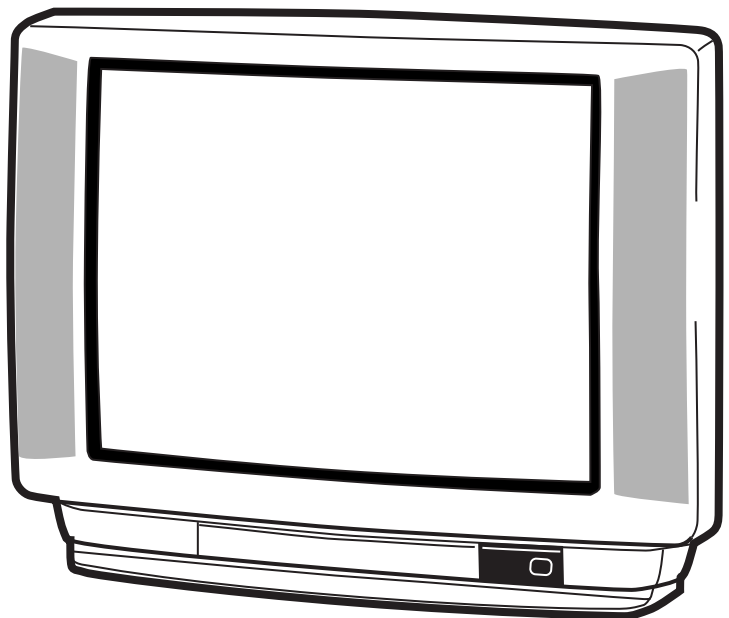

Give complete "SERVICE REF. NO." for parts order or servicing. It is shown on the rating plate at the cabinet back of the unit.

Note
This T.V. receiver will not work properly in foreign countries where the television transmission system and power source differ from the design specifications. Refer to the specification table on page 2.

CONTENTS

Safety precautions	2
Chassis Diagrams	3
Disassembly	4
Service adjustments [Option Setting]	5
Service adjustments [Service Adjustment]-[Adjustment]	6 -10
CPU port functions	11
IC block diagrams	12 - 13
Pin description of semi-conductors	14
Parts description and reading in schematic diagram	15
Cabinet parts list	16
Electrical parts list	17 - 23

SAFETY PRECAUTION

- 1: An isolation transformer should be connected in the power line between the receiver and the AC line when a service is performed on the primary of the converter transformer of the set.
- 2: Comply with all caution and safety-related notes provided on the cabinet back, inside the cabinet, on the chassis or the picture tube.
- 3: When replacing a chassis in the cabinet, always be certain that all the protective devices are installed properly, such as, control knobs, adjustment covers or shields, barriers, isolation resistor-capacitor networks etc. Before returning any television to the customer, the service technician must be sure that it is completely safe to operate without danger of electrical shock.

X-RADIATION PRECAUTION

The primary source of X-RADIATION in the television receiver is the picture tube. The picture tube is specially constructed to limit X-RADIATION emissions. For continued X-RADIATION protection, the replacement tube must be the same type as the original including suffix letter. Excessive high voltage may produce potentially hazardous X-RADIATION. To avoid such hazards, the high voltage must be maintained within specified limit. Refer to this service manual, high voltage adjustment for specific high voltage limit. If high voltage exceeds specified limits, take necessary corrective action. Carefully follow the instructions for +B1 volt power supply adjustment, and high voltage adjustment to maintain the high voltage within the specified limits.

PRODUCT SAFETY NOTICE

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by mark \triangle in the parts list and the schematic diagram designate components in which safety can be of special significance. It is particularly recommended that only parts designated on the parts list in this manual be used for component replacement designated by mark \triangle . No deviations from resistance wattage or voltage ratings may be made for replacement items designated by mark \triangle .

SPECIFICATIONS

Power source	AC 220~240V 50Hz
Television System	B/G
Colour system	PAL/NTSC4.43 on Air (PAL/NTSC4.43/NTSC3.58 in AV mode)
Channel coverage	VHF: E2-E12 UHF: 21-69 CATV: X, Y, Z, S1-S41
Aerial input impedance	75ohm
AV terminals	
AV1:	CENELEC Standard Input: Composite video, RGB and audio-L/R Output: TV-output with composite video and audio-L/R
AV2:	CENELEC Standard Input: Composite video, S-VHS and audio-L/R Output: Monitor-output with composite video and audio-L/R
Sound output (continuous) (watts)	5.0 x 2
Picture tubes (Inches)	28
Dimensions (WxHxD)	736 x 585.5 x 494mm
Weight	32 kg

Specifications subject to change without notice.

CHASSIS DIAGRAMS

This is a basic diagram for all models and therefore differs slightly from the actual block diagram.


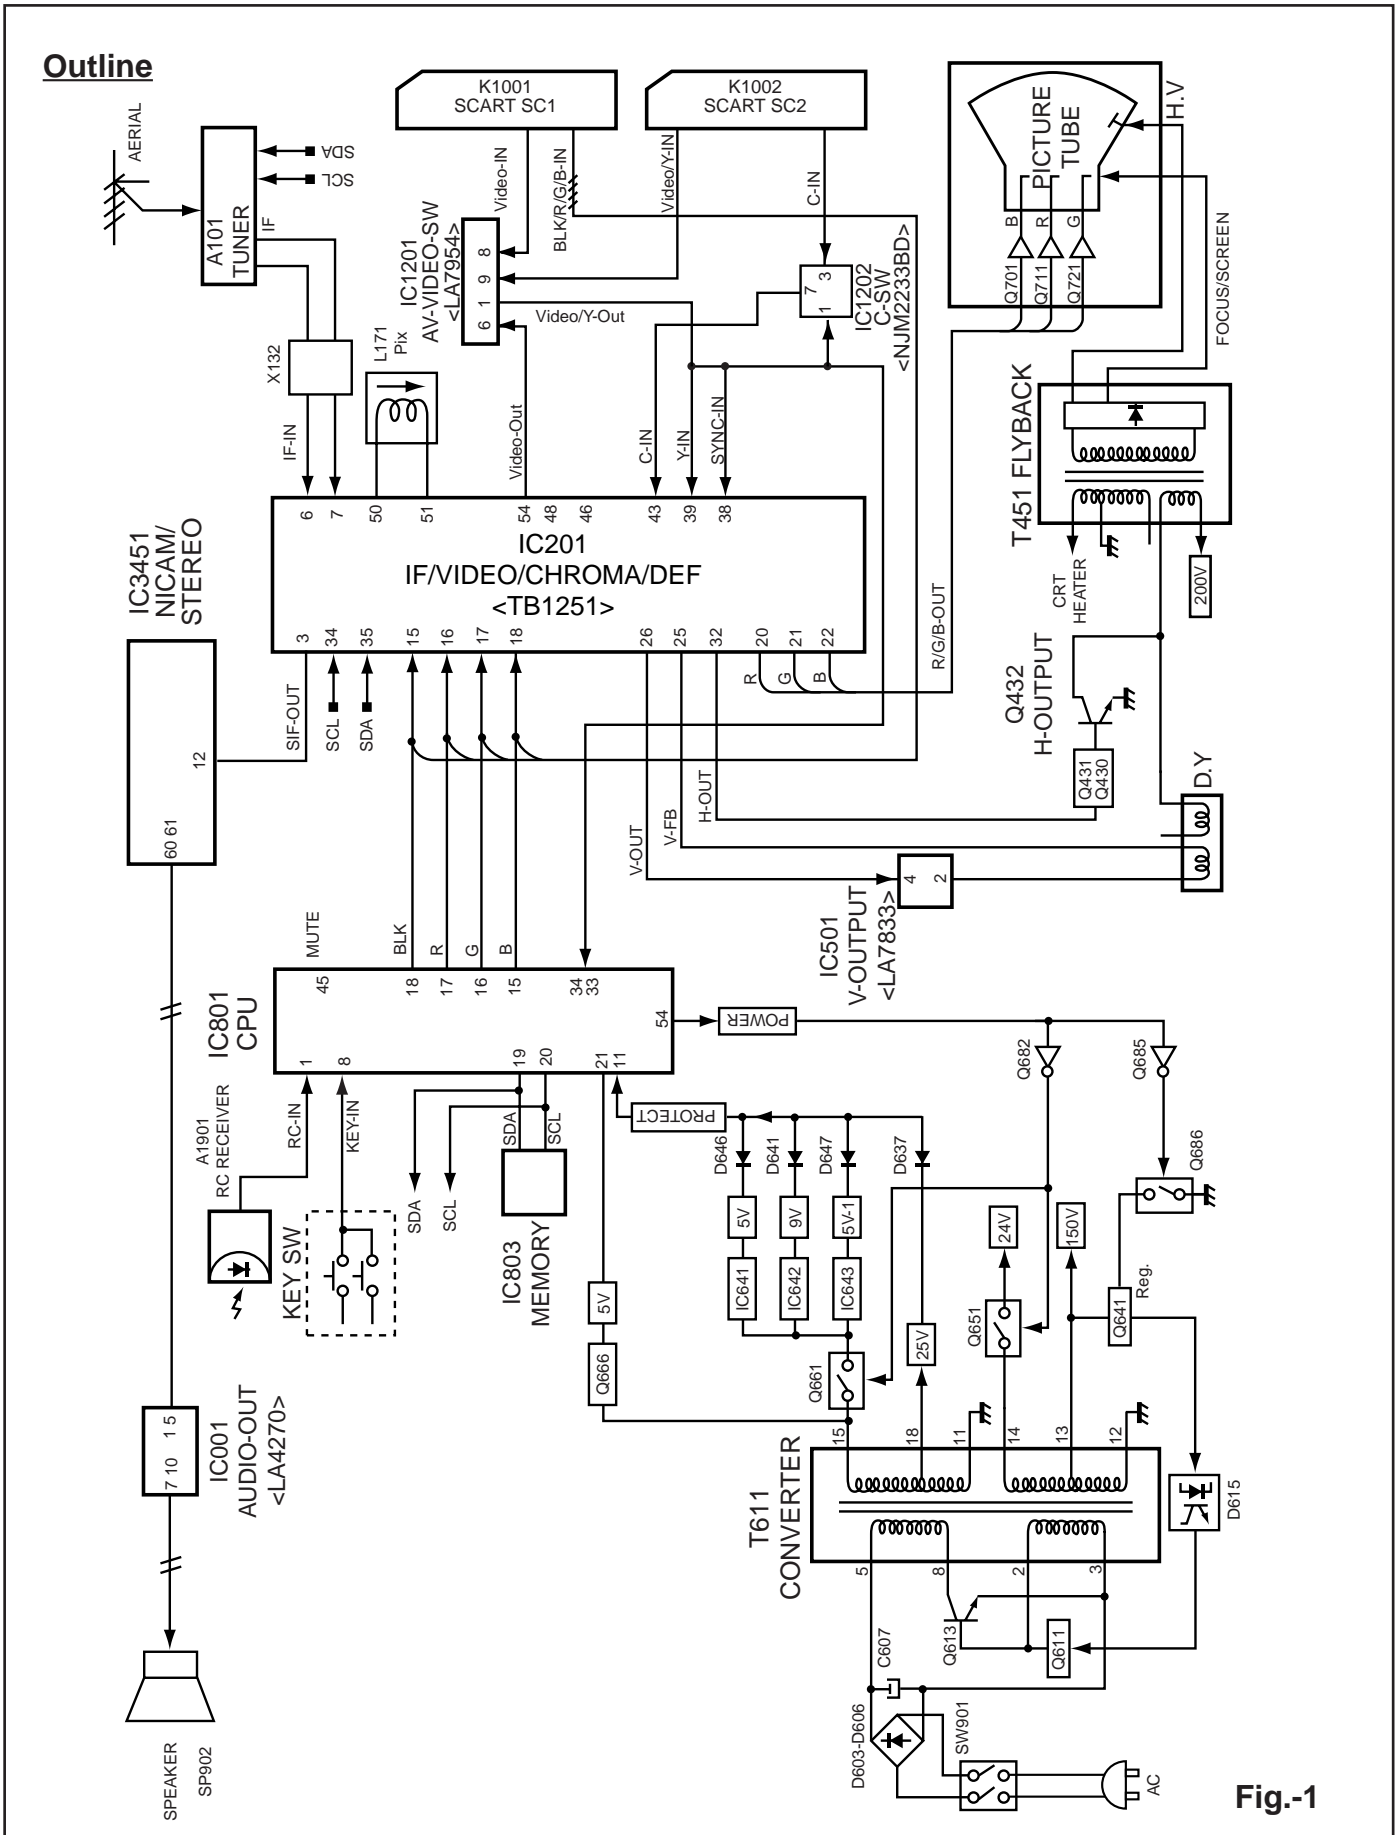


Fig-1

DISASSEMBLY

CABINET BACK DISASSEMBLY

1. Remove 8 screws(A) to take the cabinet back off.

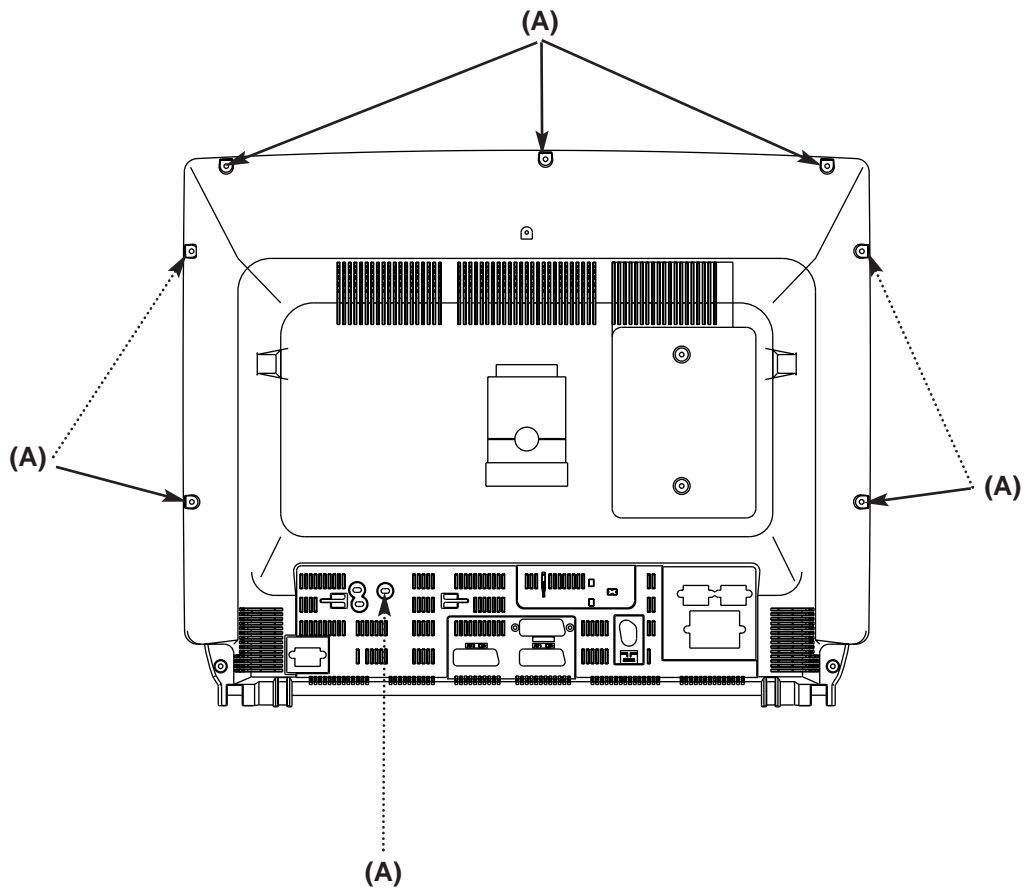

SERVICE ADJUSTMENTS

[After replacing the Memory IC (IC803)]

The memory IC, IC803, stores the feature setting data of TV set and service adjustments data for each circuit, therefore, when the memory IC is replaced, it should be programmed by following "OPTION SETTING" and "SERVICE ADJUSTMENT".

To enter the Option Mode

+ Press and hold the **F/OK** button on the remote control and **P▼** button on the front panel of the TV. The option window will appear on the screen.

ON TIMER	ON
Wel. TEXT	ON
P&P	ON
SORT MODE	Tuning
Destination	BG
3D Surround	OFF
2 step mute	ON
AV3 mode	OFF

OPTION SETTINGS FOR CE28B5-C-01

To set the option mode

- + Highlight the desired option item by using the **P▲** or **P▼** button .
- + To switch the option mode, use the **Volume - (LEFT)** or **Volume + (RIGHT)** button.
- + The data which is set in the option mode is stored into the memory IC automatically.

Following table shows the available option items and default setting mode.

<u>Option Mode</u>	<u>Mode</u>	<u>Description & Note</u>
ON-TIMER	ON or OFF	On-timer available, default "ON"
Wel. Text	ON or OFF	Display message when first set up, default "ON"
P&P	ON or OFF	Plug & Play mode, default "ON"
SORT MODE	Tuning or Sorting	Tuning mode, default "Tuning"
Destination	BG, BG/DK, SECAM I-UK or I-IRE	Destination option , default "BG/DK"
3D Surround	ON or OFF	3D Surround available, default "ON"
2 step mute	ON or OFF	Mute mode option, default "OFF"
AV3 mode	ON or OFF	Front AV mode option, default "ON"

Exit from the Option Mode

- + Press the **MENU** button.

[SERVICE ADJUSTMENT]

Note: Some items of the service adjustments for this chassis are controlled by the CPU, IC801, and the adjustments are carried out by using the RC handset.

IMPORTANT NOTICE

Do not attempt to adjust service adjustments not listed below otherwise it may cause loss of performance and product safety.

To enter the Service Mode

+ Press and hold the **“GREEN” button** and the **P▼ button** on front control panel. The adjustment item will be displayed on the screen.



The available adjustment items are as follows;


- Image** : This can be adjusted for picture images/shapes.
- Regular** : This can be adjusted for the service adjustment.
- other** : This is for factory setting. Do not adjust.
- TB1251** : This is for the factory setting. Do not adjust.

* Do not adjust items in the “other” and “TB1251” otherwise the TV set may not operate properly.


To select the mode and service item and change data value

- + Select the desired adjustment mode (**Image** or **Regular mode**) by using the **P▲** or **P▼ button** and then press the **Volume + (RIGHT) button**.
- + To select the adjustment item, use the **P▲** or **P▼ button**.
- + To change the service data, use the **Volume -(LEFT)** or **Volume + (RIGHT) button**.
- + The data which is set in the service mode is stored into the memory IC automatically.

Image mode

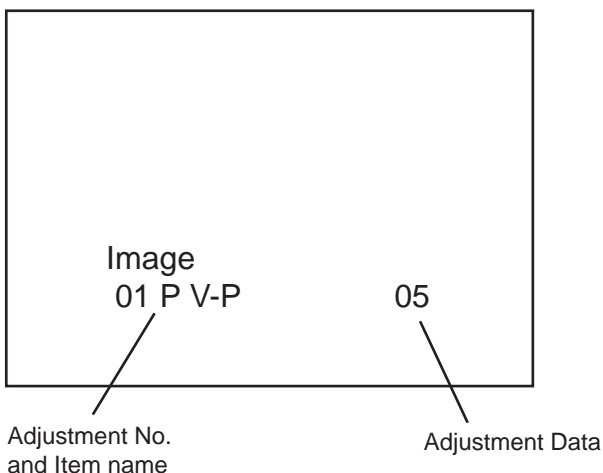

Regular mode

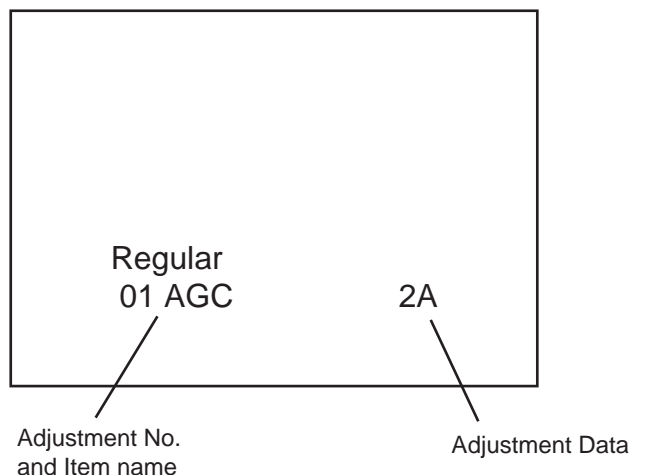

ADJUSTABLE SERVICE ADJUSTMENT

IMPORTANT NOTICE

Do not attempt to change the data value of service items not listed in the table below otherwise it may cause loss of performance and product safety. If you can not restore the data value of each service item, please initialize the memory IC following to the below description "INITIALIZATION OF MEMORY IC" and re-adjust all of service adjustments.

[Image]

<u>Item No.</u>	<u>OSD</u>	<u>Description</u>
01	P V-P	P Vertical Position Adjustment
02	P H-P	P Horizontal Position Adjustment
03	P V-L	P Vertical Linearity Adjustment
04	P VSC	P Vertical S-Correction Adjustment
05	P V-S	P Vertical Size Adjustment
06	P H-S	P Horizontal Size Adjustment
07	P PCC	P Pin Cushion Correction Adjustment
08	P TCC	P Trapezoid Distortion Adjustment
10	P CCC	P Corner Correction Adjustment

[Regular]

<u>Item No.</u>	<u>OSD</u>	<u>Description</u>
1	AGC	AGC Adjustment
2	--	Cut-off Adjustment
3	GRY	Grey Scale Adjustment [White Balance]
4	CTR	Contrast Adjustment (Factory use, use default setting data)
5	SCR	Screen adjustment (Factory use, use default setting data)
6	OSD	On-screen Display Positioning Adjustment

Exit from the Service Mode

+ Press the **MENU** button or turn off the TV set by using the Mains switch.

[INITIALIZATION OF MEMORY IC]

To initialize the memory IC (IC803), press and hold the "NORMAL" →•← button and then press the **P▼** button on the front control panel, **and then turn the Mains switch Off and On**. Now the initialization is completed.

When initialized the memory IC, all of the setting data (option setting data and service adjustment data) stored in the IC are reset to the default value. It is necessary to set the option setting and readjust the service adjustments listed on the above.

[ADJUSTMENTS]

To adjust each service data, please see "SERVICE ADJUSTMENT" on pages 8&9 for entering the service mode , selecting service item and adjusting the service data value.

IMPORTANT NOTICE

Do not attempt to adjust the following service adjustments except requiring the readjustments in servicing otherwise it may cause loss of performance and product safety.

+B ADJUSTMENT

1. Receive white raster pattern.
2. Set controls to normal.
3. Connect digital voltmeter to test point TP-B and GND.
4. Adjust voltage to 150 ±0.5V by using VR641 (28").

RF-AGC ADJUSTMENT

1. Input and tune an RF signal which is VHF ch05 175.25MHz with 63dBuV/75 terminated signal gain.
2. Connect digital voltmeter to test point TP-A and GND.
3. Enter the service mode and select mode "Regular", and select item "01 AGC".
4. Press the **LEVEL+** or **LEVEL - button** to adjust voltage to be 3.2Vdc.

FOCUS ADJUSTMENT

By using FOCUS VR, adjust focus control for well defined scanning lines.

GREY SCALE ADJUSTMENT

CUT-OFF ADJUSTMENT

1. Select AV mode with no signal input.
2. Enter the service mode and select mode "Regular", item "02". The horizontal line will appear on the screen.
3. Adjust the Screen VR on the FBT to obtain the one colour to be just visible.
4. By using the buttons 1, 2, 4, 5, 7, 8 on the remote control, adjust the line to be white.


The key allocation is as follows;

Button No. Operation

- | | |
|---|----------------|
| 1 | Increase Red |
| 2 | Decrease Red |
| 4 | Increase Green |
| 5 | Decrease Green |
| 7 | Increase Blue |
| 8 | Decrease Blue |

DRIVE ADJUSTMENT

5. Receive the white raster signal.
6. Select item "03 GRY".
7. Adjust [R-Drive] and [B-Drive] control to obtain proper white balance by using **LEVEL+** or **LEVEL - button**.
 - a) Select [R-Drive] or [B-Drive] by using the **P▲** or **P▼** button.
 - b) Adjust [R-Drive] or [B-Drive] by using the **LEVEL+** or **LEVEL - button**.

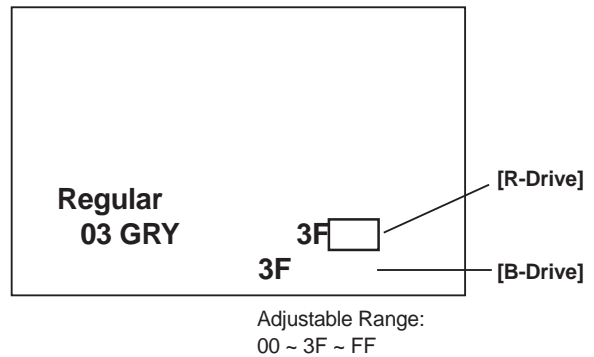


HORIZONTAL POSITION ADJUSTMENT

1. Receive circular pattern .
2. Enter the service mode and select mode "Image", item "02 P H-P".
3. Press the **LEVEL+** or **LEVEL - button** to adjust horizontal centre.

HORIZONTAL WIDTH ADJUSTMENT

1. Receive circular pattern and set screen mode to "FULL".
2. Enter to the service mode and select mode "Image", and item "06.P H-S".
3. Press the **LEVEL+** or **LEVEL - button** to adjust the horizontal width.

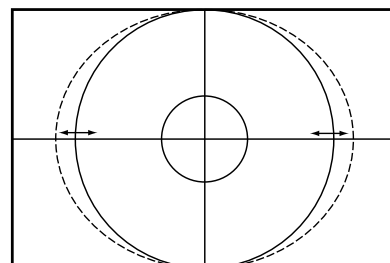


SERVICE ADJUSTMENTS

PCC ADJUSTMENT


PCC ADJUSTMENT

1. Receive cross hatch pattern and set screen mode to "FULL".
2. Enter to the service mode and select mode "Image", and select "07.P PCC".
3. Press the **LEVEL+** or **LEVEL -** button to adjust the vertical line to be straight.



TRAPEZOID ADJUSTMENT

1. Receive cross hatch pattern and set screen mode to "FULL".
2. Enter to the service mode and select mode "Image", and select "08.P TCC".
3. Press the **LEVEL+** or **LEVEL -** button to correct the trapezium distortion of the vertical line.

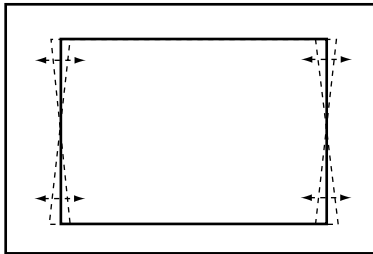

HIGH-VOLTAGE CONFIRMATION


1. Receive circular pattern.
2. Connect a digital volt-meter to both terminals of R453, and a high voltage meter to CRT anode.
3. Confirm high voltage to be $29.0KV \pm 1 KV$ at beam current reading $1.3mV (28)$.

VERTICAL POSITION ADJUSTMENT

1. Receive circular pattern..
2. Enter the service mode and select mode "Image, item "01 P V-P".
3. Press the **LEVEL+** or **LEVEL -** button to adjust vertical centre.


VERTICAL SIZE ADJUSTMENT

1. Receive circular pattern .
2. Enter the service mode and select mode "Image", item "05 P V-S".
3. Press the **LEVEL+** or **LEVEL -** button to adjust the vertical height.

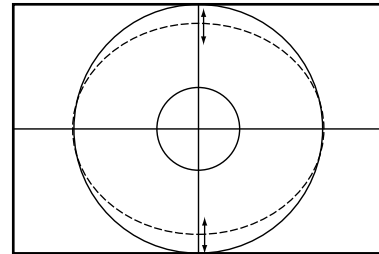


OSD POSITIONING ADJUSTMENT


1. Receive circular pattern.
2. Enter the service mode and select mode "Regular", and select item "06 OSD". The OSD test bar will appear on the top of screen.
3. Press the **LEVEL+** or **LEVEL -** button to adjust proper OSD positioning.

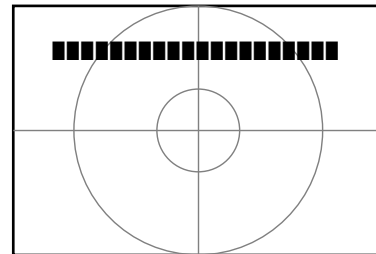

Component Locations
Main Board

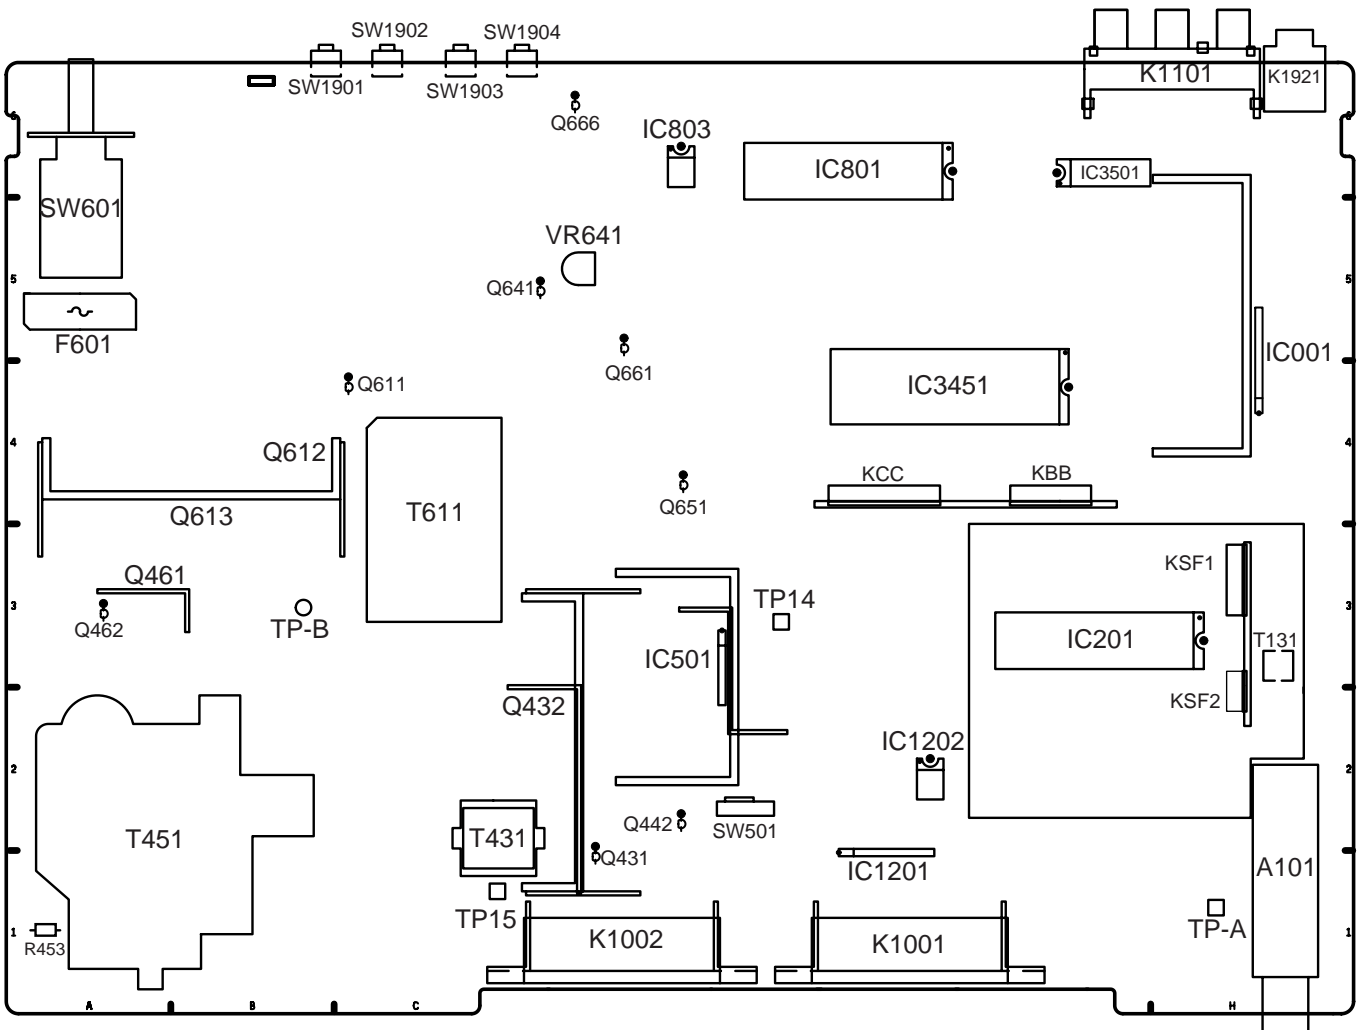

CRT Board

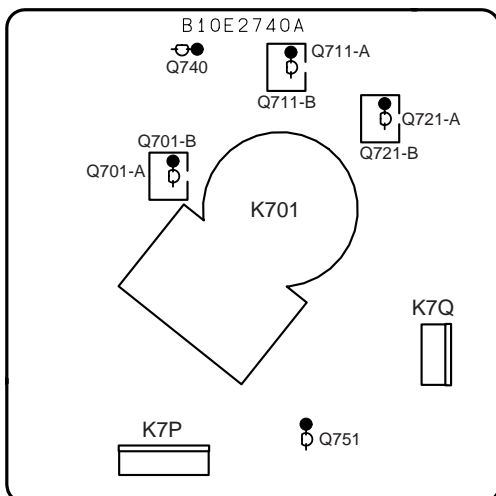


CPU PORT FUNCTIONS


Pin No.	Function Name	Function	IN/OUT
1	RC IN	RC Signal Input	IN
2	RESET	Reset Input	IN
3	AUD-MUTE	TV Audio Mute Output "L": Mute On	OUT
4	P0.6	Note used	--
5	P0.5	Note used	--
6	P0.4	Note used	--
7	P0.3	Note used	--
8	KEY IN	Key Switch Signal Input	IN
9	P0.1	Note used	--
10	P0.0	Note used	--
11	PROTECT	Power Failure Detect Input "L": Error	IN
12	P3.6	Note used	--
13	P0.6	Note used	--
14	WE	Write Enable	OUT
15	B-OUT	Blue Output	OUT
16	G-OUT	Green Output	OUT
17	R-OUT	Red Output	OUT
18	BF-OUT	Fast Blanking Output	OUT
19	SDA	SDA	IN/OUT
20	SCL	SCL	OUT
21	VDD	Power	IN
22	JDTO	Not used	--
23	N.C	Not used	--
24	Vpp	Not used	--
25	AVDD3	Analogue VDD of PLL	--
26	TEST0	Test	--
27	MCFM	Test	--
28	JTCK	Test	--
29	TXCF	Analogue pin for the Teletext slicerline PLL	--
30	CVBS0	Not used	--
31	AVDD2	Analogue Power Supply	IN
32	JTMS	Not used	--
33	CVBS2	Composite Video Signal Input	IN
34	CVBS1	Composite Video Signal Input	IN
35	AGND	Digital Ground	--
36	GND	Analogue Ground	--
37	JTRSTO	Test	--
38	PXFM	Analogue pin for the Display Pixel Frequency Multiplier	--
39	AVDD	Analogue Power Supply	IN
40	H-SYNC	Horizontal Sync. Input	IN
41	V-SYNC	Vertical Sync. Input	IN
42	ACK	Answer for STATUS	OUT
43	STATUS	Request for bus open	IN
44	IGNOA	RGB on/off Switch	OUT
45	AMP-MUTE	Mute on/off SWitch	OUT
46	P4.4	Not used	--
47	LED2	LED Drive	OUT
48	P4.6	S-Video	--
49	P4.7	Not used	--
50	OSCOUT	Oscillator Output	OUT
51	OSCIN	Oscillator Input	IN
52	RF AGC	RF Gain Control	IN
53	P2.4	Not used	--
54	POWER	Power on/off Switch	OUT
55	IF AGC	IF Auto gain Control	IN
56	8PIN	AV Input Detect	IN

IC BLOCK DIAGRAMS


IC201 TB1251 <IF/Video/Chroma/Def.>

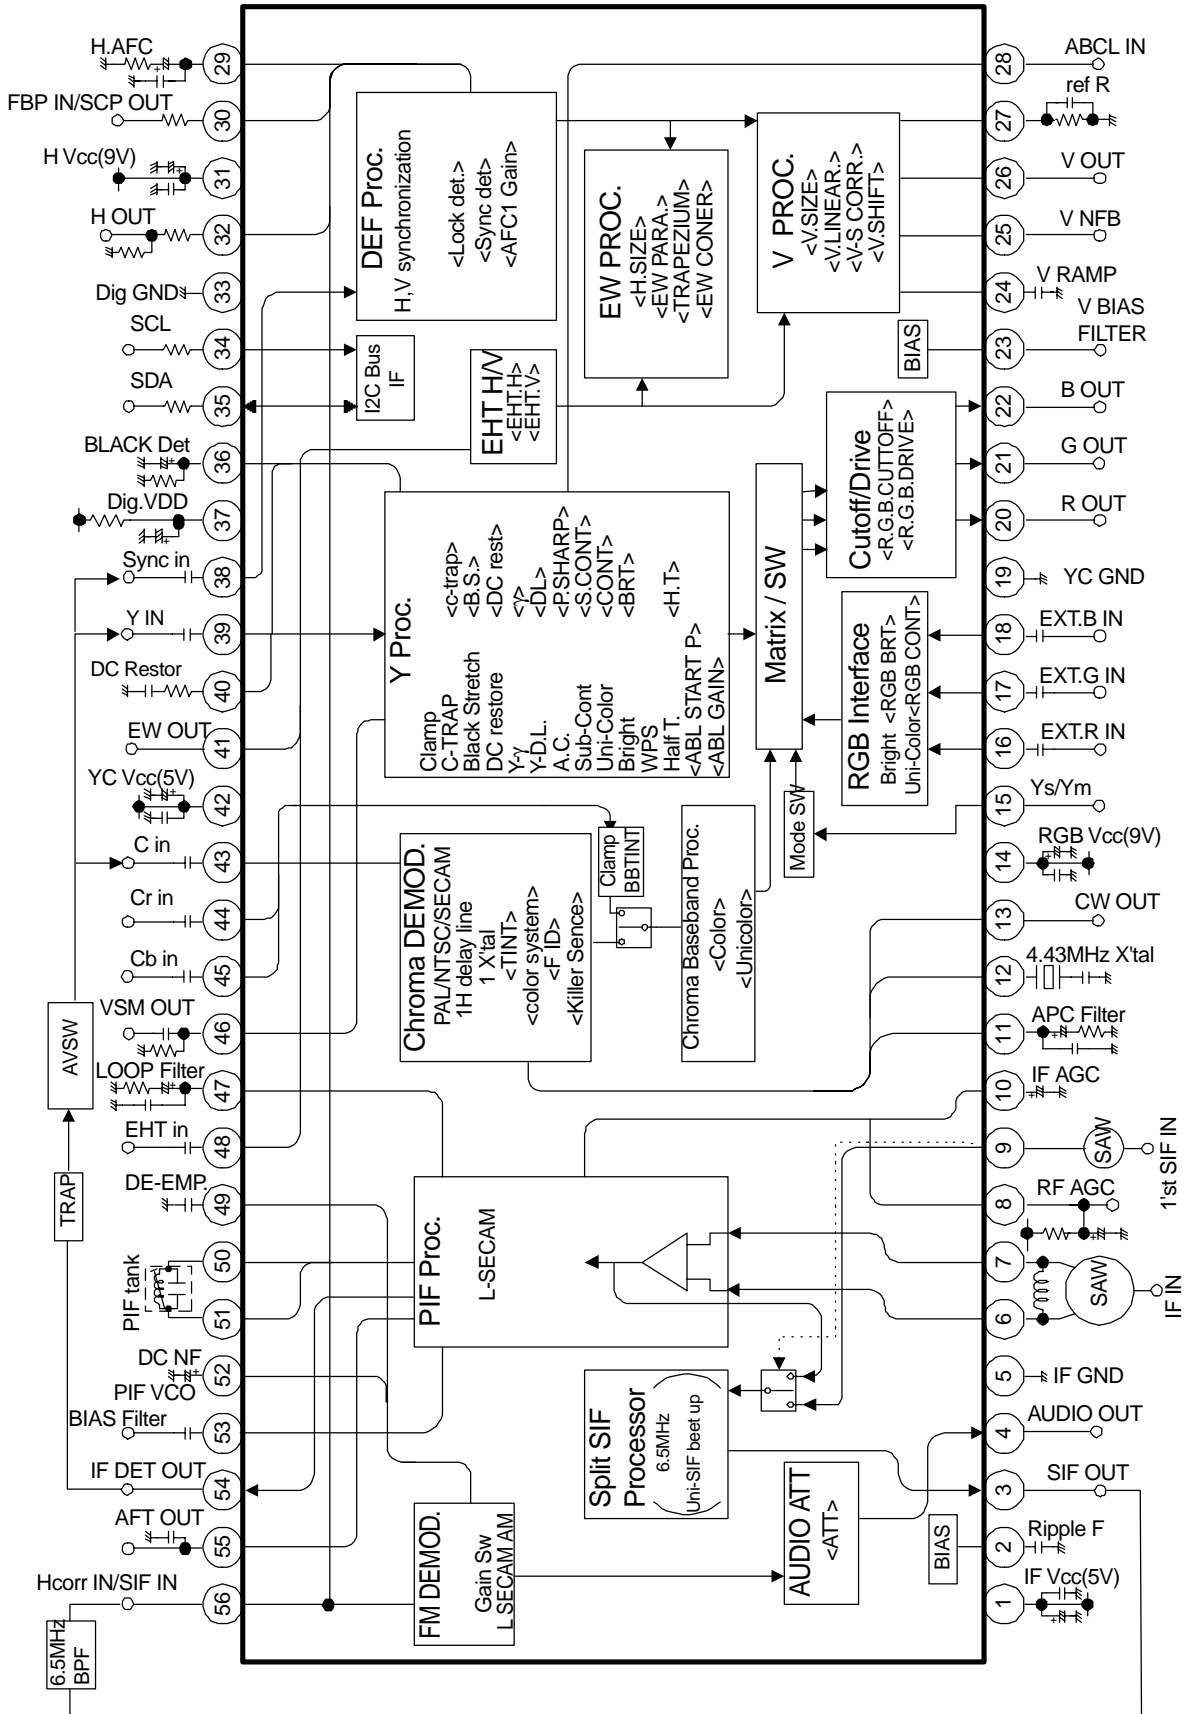

IC501 LA7833 <Vertical Output>

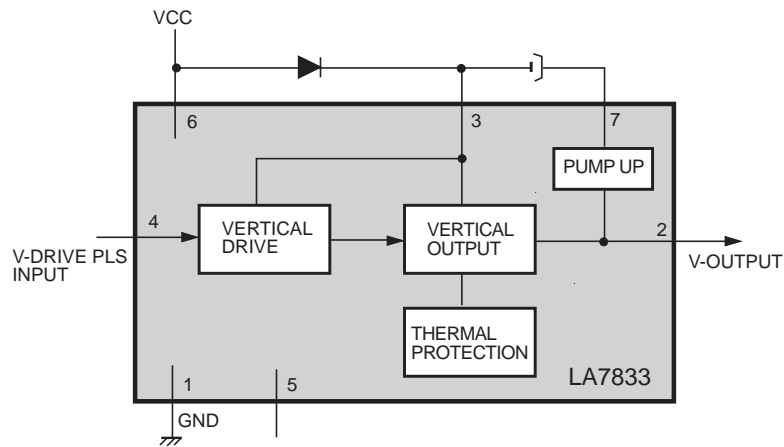


IC3451 TDA9875A <NICAM & Stereo Sound Decoder>

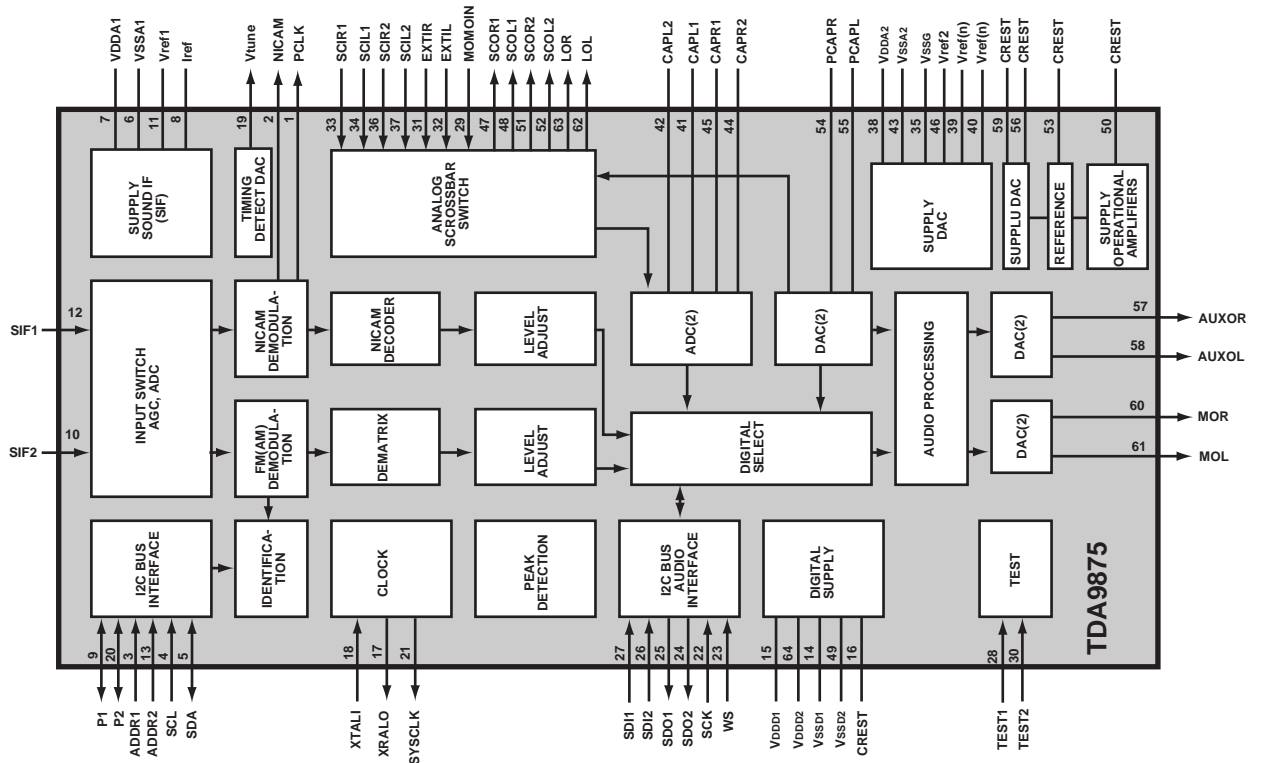

PARTS DESCRIPTION AND READING IN SCHEMATIC DIAGRAM

1. The parts specification of resistors, capacitors and coils are expressed in designated code. Please check the parts description by the following code table.
2. Some of transistors and diodes are indicated in mark for the substitution of parts name. Please check the parts name by the following code table.
3. Voltages and waveforms were taken with a video colour bar signal(1Vp-p at 75 ohms terminated) and controls to normal.
4. Voltages were taken with a high-impedance digital voltmeter.

Resistor Reading

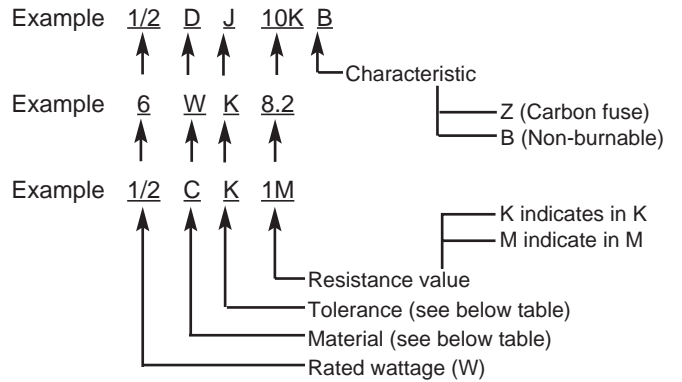

Note: Resistor which is indicated with resistance value only are 1/6W carbon resistor. Resistor which is indicated with material, tolerance and value are 1/4W rated wattage.


● Material table

Mark	Material
D	Carbon
N	Metal film
S	Oxide metal film
C	Solid
G	Metal glaze
W	Wire winding or cement
H	Ceramic
F	Fusible

● Tolerance table

Mark	Tolerance
A	±0.05
B	±0.1
C	±0.25
D	±0.5
F	±1
G	±2
J	±5
K	±10
M	±20
P	+5 -15
Z	used in 0 ohm

Capacitor Reading

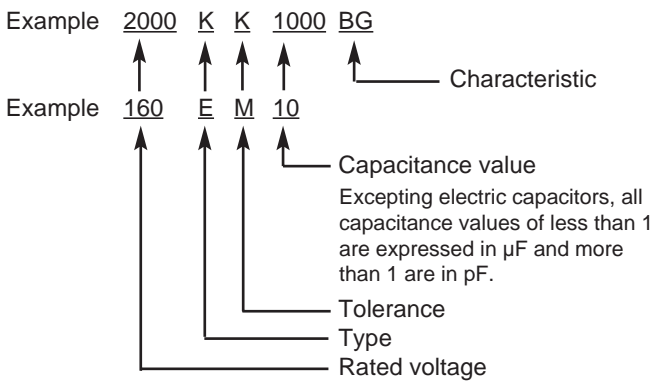

● Material table

Mark	Material
E	Electrolytic
P	Electrolytic (non-polarized)
C	Ceramic (temperature compensation)
K	Ceramic
F	Polyester
N	Polypropylene
M	Metalized polypropylene
H	Metalized polypropylar
B	Ceramic (semiconductor)
G	Metalized polyester
Y	Composite film
S	Styrol
T	Tantalum oxide solid electrolytic
U	Organic semiconductive electrolyte
D	Electric double layer electrolytic

● Tolerance table

Mark	Tolerance
A	not specified
B	±0.1
C	±0.25
D	±0.5
F	±1
G	±2
E	±2.5
H	±3
J	±5
K	±10
M	±20
N	±30
P	+100 -0
Q	+30 -10
T	+50 -10
U	+75 -10
V	+20 -10
W	+100 -10
X	+40 -20
Y	+150 -10
Z	+80 -20

Diode/Transistor Type Reading

● Diode

Mark	Type number
R	1S2076A,1S2473,1N4148
AA	1S2076A,1S2473,1SS133,1N4148

● Transistor

(1) NPN type

Mark	Type number			
--	2SC536	2SC945A	2SC1815	2SC1740S
AD	NF, NG	PA, QA, RA	Y, GR	Q, R, S
AE	NF, NG	PA, QA	O, Y, GR	Q, R, S


(2) PNP type

Mark	Type number			
--	2SA608	2SA564A	2SA1015	2SA933S
AB	NF	R	Y, GR	R
AC	NF	Q, R	O, Y, GR	Q, R

(3) Chip type

Mark	Type number				
--	2SA1179	2SA1037K	2SA1037AK	2SC2812	2SC2412K
AJ	M6, M7	R, S	R, S		
AH				L6, L7	R, S


Coil Reading

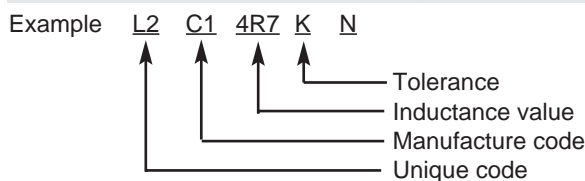

Mark	Tolerance (nH)	Mark	Tolerance (%)
C	±0.25	G	±2
D	±0.5	J	±5
S	±0.3	K	±10
A	±0.2	L	±15
		M	±20

CABINET PARTS LIST FOR MODEL CE28B5-C-01

Note: Parts order must contain Service Ref. No., Part No., and descriptions.

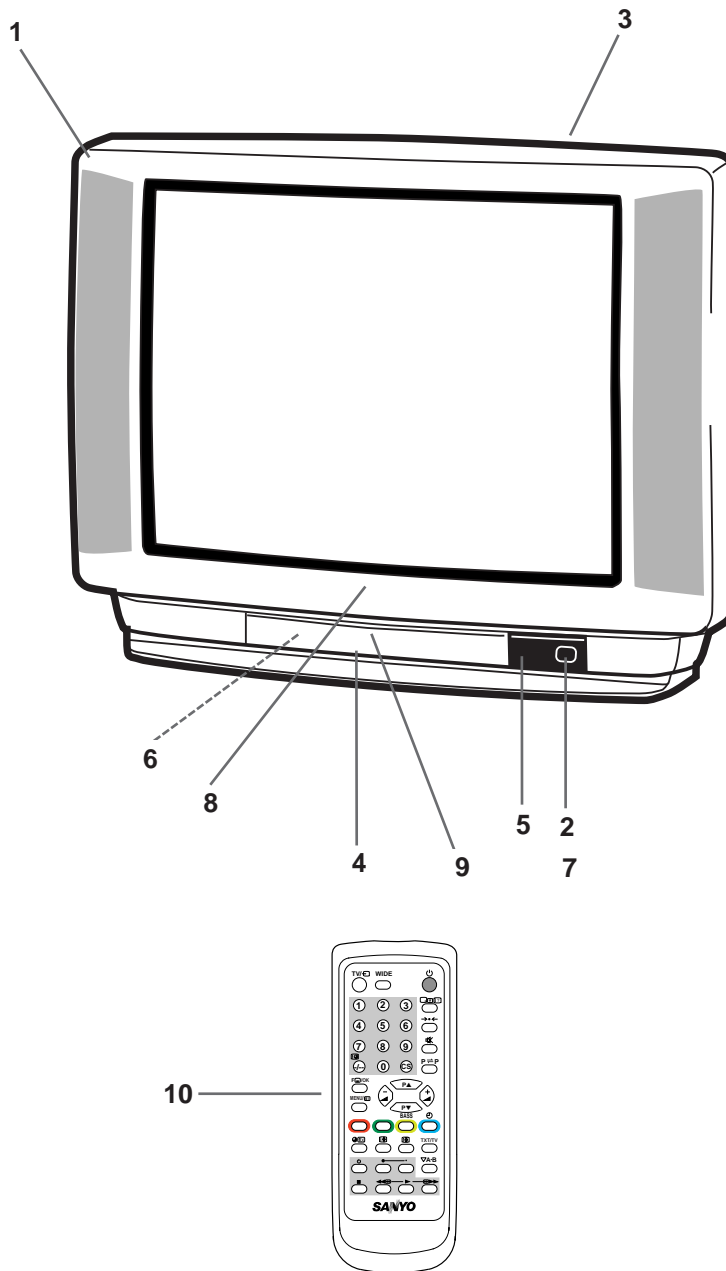

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
CABINET PARTS			ACCESSORIES		
1	610 273 1767	ASSY, CABINET FR- F7SDV	10	JXMKE	RC TRANSMITTER
2	610 261 6057	BUTTON POWER- F3SCM		SKP10301	INST MANUAL - C3JDV(1)
3	610 286 7688	CABINET BACK- G- F3SLV- A		SKP10302	INST MANUAL - C3JDV(2)
4	610 289 9368	DOOR- F7SDV		610 294 1654	SCHEMATIC DIAGRAM- C3SDV
5	610 261 6132	DEC BOARD- F3SCM		645 027 6927	BATTERY
6	610 275 0232	DEC CONTROL SHEET- F3JPV			
7	610 261 3032	COIL SPRING- E7GCS			
8	645 023 4316	BADGE, SANYO*46. 2X13. 5L45			
9	645 019 2449	LATCH PUSH, 7. 9X6. 9BK			


CHASSIS ELECTRICAL PARTS LIST

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by a Δ mark in this parts list and the circuit diagram show components whose value have special significance to product safety. It is particularly recommended that only parts specified on the following parts list be used for components replacement pointed out by the mark Δ .

Note: Parts order must contain Service Ref. No., Part No., and descriptions.

Read description in the Capacitor and Resistor as follows:


CAPACITOR

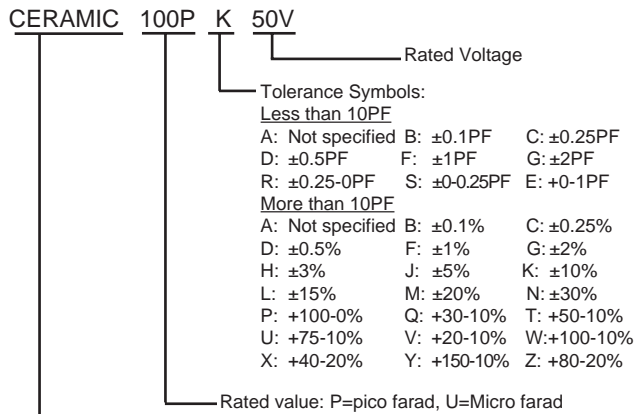

Material:

- CERAMICCeramic
- MT-PAPERMetallized Paper
- POLYESTERPolyester
- MT-POLYEST.....Metallized Polyester
- POLYPROPolypropylene
- MT-POLYPROMetallized Polypropylene
- COMPO FILM.....Composite film
- MT-COMPOMetallized Composite
- STYRENE.....Styrene
- TA-SOLIDTantalum Solid
- AL-SOLIDAluminium Solid
- ELECTElectrolytic
- NP-ELECTNon-polarised Electrolytic
- OS-SOLIDAluminium Solid with Organic Semiconductive Electrolytic
- DL-ELECTDouble Layered Electrolytic

RESISTOR

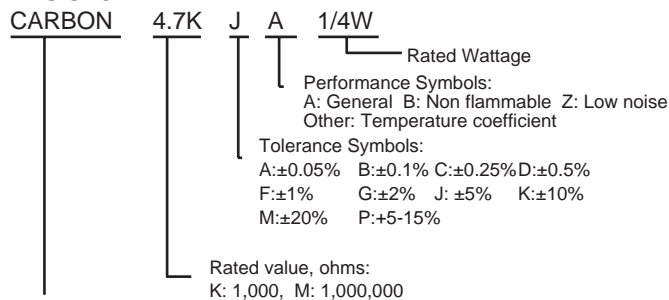

Material:

- CARBON Carbon
- MT-FILM Metal Film
- OXIDE-MT Oxide Metal Film
- SOLID Composition
- MT-GLAZE Metal Glaze
- WIRE WOUND Wire Wound
- CERAMIC RES Ceramic
- FUSIBLE RES Fusible

Ref. No. Part No. Description

Chassis construction

CE28B5-C-01

- OUT OF CIRCUIT - 013C3SDV (Page 17)
- 1AA0B10E650A0 ASSY,PWB,MAIN C3SDV (Page 17~22)
- 1AA0B10E595B0 ASSY,PWB,CRT C2WBV (Page 22~23)
- 1AA0B10H047B0 ASSY,PWB,HARMONICS EB6 AC (Page 23)

OUT OF CIRCUIT - 013C3SDV

COIL

- Δ L901 645 041 8037 PRE- FORM, D- COIL, 28- TOTOKU

PICTURE TUBE

- Δ Q901 414 011 5501 A66EHJ13X38 50HZ, 52%CHINA

MISCELLANEOUS

- SP901 610 232 3986 SPEAKER
- SP902 610 232 3986 SPEAKER
- Δ W901 645 012 7632 EURO PLUG +2P HOUSE @ 2. 1
- W902 610 286 1594 GND, WIRE CONEC. C2WAV

1AA0B10E650C0 ASSY,PWB,MAIN C3VDS

CAPACITOR

- | | | | | |
|-------|--------------|-------------------|-------------------------|-------|
| C001 | 403 044 9521 | ELECT | 100U M | 25V |
| C003 | 403 207 0317 | SMD 1MF | GRM40Y5V105Z16PT | |
| C004 | 403 155 2111 | CERAMIC | 1500P K | 50V |
| C005 | 403 047 3100 | ELECT | 47U M | 25V |
| C006 | 403 207 0317 | SMD 1MF | GRM40Y5V105Z16PT | |
| C007 | 403 155 2111 | CERAMIC | 1500P K | 50V |
| C008 | 403 044 9521 | ELECT | 100U M | 25V |
| C009 | 403 157 6612 | CERAMIC | GRM39X7R471K50PT | |
| C010 | 403 201 5011 | | 16 YK 330 M TA K0811 | |
| C011 | 403 224 5012 | | GRM188F51C154ZA01D MUR. | |
| C012 | 403 224 5012 | | GRM188F51C154ZA01D MUR. | |
| C013 | 403 154 1917 | | 35 YK 1000 M TA K1220 | |
| C014 | 403 224 5012 | | GRM188F51C154ZA01D MUR. | |
| C015 | 403 224 5012 | | GRM188F51C154ZA01D MUR. | |
| C016 | 403 218 8151 | | 25 YK 1000 M TA 1020 | |
| C017 | 403 218 8151 | | 25 YK 1000 M TA 1020 | |
| C052 | 403 113 3815 | CERAMIC | 1000P K | 50V |
| C056 | 403 155 1510 | CERAMIC | 180P J | 50V |
| C1002 | 403 323 8815 | GRM40Y5V225Z16VPT | SMDCAP | |
| C1003 | 403 323 8815 | GRM40Y5V225Z16VPT | SMDCAP | |
| C1004 | 403 323 8815 | GRM40Y5V225Z16VPT | SMDCAP | |
| C101 | 403 233 1517 | | 50 YK 4R7 M TA 0511 | |
| C1010 | 403 157 3611 | CERAMIC | 100P J | 50V |
| C1012 | 403 157 3611 | CERAMIC | 100P J | 50V |
| C1013 | 403 157 3611 | CERAMIC | 100P J | 50V |
| C1014 | 403 113 3815 | CERAMIC | 1000P K | 50V |
| C1015 | 403 233 0817 | ELECT | 10U M | 50V |
| C1016 | 403 113 3815 | CERAMIC | 1000P K | 50V |
| C1017 | 403 233 0817 | ELECT | 10U M | 50V |
| C102 | 403 039 3507 | ELECT | 470U M | 6. 3V |
| C1020 | 403 149 9218 | CERAMIC | 0. 01U Z | 50V |
| C1021 | 403 157 3611 | CERAMIC | 100P J | 50V |

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
C1022	403 279 4312	CERAMI C 0.33U K 16V	C242	403 237 8057	MT- COMPO 0.1U J 50V
C1024	403 157 3611	CERAMI C 100P J 50V	C243	403 157 7015	CERAMI C 1800P K 50V
C1025	403 260 2944	MT- COMPO 0.33U J 50V	C244	403 215 2211	CERAMI C 0.01U K 50V
C1026	403 113 3815	CERAMI C 1000P K 50V	C247	403 233 0817	ELECT 10U M 50V
C1027	403 233 0817	ELECT 10U M 50V	C251	403 314 5915	SMD CAP GRM40X7R474K16
C1028	403 113 3815	CERAMI C 1000P K 50V	C252	403 314 5915	SMD CAP GRM40X7R474K16
C1029	403 233 0817	ELECT 10U M 50V	C3411	403 157 3611	CERAMI C 100P J 50V
C103	403 039 3507	ELECT 470U M 6.3V	C3412	403 157 3611	CERAMI C 100P J 50V
C104	403 233 0817	ELECT 10U M 50V	C3413	403 157 3611	CERAMI C 100P J 50V
C106	403 149 9218	CERAMI C 0.01U Z 50V	C3414	403 157 3611	CERAMI C 100P J 50V
C109	403 149 9218	CERAMI C 0.01U Z 50V	C3441	403 279 4312	CERAMI C 0.33U K 16V
C110	403 149 9218	CERAMI C 0.01U Z 50V	C3442	403 279 4312	CERAMI C 0.33U K 16V
C113	401 105 7919	MT- GLAZE 0.000 ZA 1/16W	C3443	403 279 4312	CERAMI C 0.33U K 16V
C1202	403 248 1618	16 YK 47 M TA 0511	C3444	403 279 4312	CERAMI C 0.33U K 16V
C1203	403 149 9218	CERAMI C 0.01U Z 50V	C3452	403 314 5915	SMD CAP GRM40X7R474K16
C1204	403 233 0817	ELECT 10U M 50V	C3453	403 157 2911	CERAMI C 47P J 50V
C1205	403 233 0817	ELECT 10U M 50V	C3454	403 164 0214	CERAMI C 0.1U Z 25V
C1206	403 298 9619	CERAMI C 0.1U K 16V	C3456	403 164 0214	CERAMI C 0.1U Z 25V
C1207	403 233 0817	ELECT 10U M 50V	C3458	403 157 2911	CERAMI C 47P J 50V
C121	403 149 9218	CERAMI C 0.01U Z 50V	C3459	403 248 1618	16 YK 47 M TA 0511
C1212	403 153 9310	CERAMI C 82P J 50V	C3461	403 248 1410	50 YK 1R0 M TA 0511
C1213	403 233 0817	ELECT 10U M 50V	C3476	403 314 5915	SMD CAP GRM40X7R474K16
C1214	403 153 9310	CERAMI C 82P J 50V	C3477	403 248 1618	16 YK 47 M TA 0511
C1215	403 153 9310	CERAMI C 82P J 50V	C3480	403 248 1618	16 YK 47 M TA 0511
C1217	403 233 0817	ELECT 10U M 50V	C3481	403 248 1618	16 YK 47 M TA 0511
C1218	403 153 9310	CERAMI C 82P J 50V	C3482	403 149 9218	CERAMI C 0.01U Z 50V
C122	403 164 0214	CERAMI C 0.1U Z 25V	C3483	403 149 9218	CERAMI C 0.01U Z 50V
C124	403 157 1518	CER. GRM39COG3ROC50PT	C3484	403 248 1618	16 YK 47 M TA 0511
C125	403 069 8315	CERAMI C 0.01U Z 50V	C3485	403 149 9218	CERAMI C 0.01U Z 50V
C128	403 241 3807	ELECT 220U M 10V	C3486	403 248 1410	50 YK 1R0 M TA 0511
C129	403 145 9915	CERAMI C 22P J 50V	C3487	403 248 1410	50 YK 1R0 M TA 0511
C130	403 155 4214	CERAMI C 15P J 50V	C3492	403 149 9218	CERAMI C 0.01U Z 50V
C131	403 149 9218	CERAMI C 0.01U Z 50V	C3493	403 149 9218	CERAMI C 0.01U Z 50V
C135	403 149 9218	CERAMI C 0.01U Z 50V	C3494	403 164 0214	CERAMI C 0.1U Z 25V
C136	403 149 9218	CERAMI C 0.01U Z 50V	C3495	403 164 0214	CERAMI C 0.1U Z 25V
C138	403 149 9218	CERAMI C 0.01U Z 50V	C422	403 299 3210	POLYPRO 0.027U J 400V
C139	403 237 7941	MT- COMPO 0.22U J 50V	C423	404 079 1607	MT- POLYPRO 0.012U H 1.5K
C140	403 233 0817	ELECT 10U M 50V	C424	403 299 3012	POLYPRO 0.015U J 400V
C141	403 207 0317	SMD 1MF GRM40Y5V105Z16PT	C431	403 068 5612	CERAMI C 0.056U Z 25V
C143	401 105 7919	MT- GLAZE 0.000 ZA 1/16W	C432	403 075 7111	CERAMI C 1000P K 500V
C144	403 113 3815	CERAMI C 1000P K 50V	C433	403 076 3112	CERAMI C 3900P K 500V
C145	403 149 9218	CERAMI C 0.01U Z 50V	C434	403 054 0703	ELECT 47U M 35V
C146	403 248 1618	16 YK 47 M TA 0511	C437	403 066 6106	MT- POLYEST 0.47U J 250V
C148	403 248 2813	50 YK 2R2 M TA 0511	C441	403 309 2100	POLYPRO 0.3U J 400V
C1900	403 038 1633	ELECT 100U M 6.3V	C445	403 233 0817	ELECT 10U M 50V
C201	403 149 9218	CERAMI C 0.01U Z 50V	C450	403 248 2813	ELECT 2.2U M 50V
C203	403 269 5916	CERAMI C 0.22U K 16V	C451	404 063 5703	NP- ELECT 100NW1ROMFA- 6311
C204	403 149 9218	CERAMI C 0.01U Z 50V	C463	403 173 8208	POLYESTER 6800P K 100V
C205	403 149 9218	CERAMI C 0.01U Z 50V	C466	403 188 0808	MT- POLYEST 2.2U J 100V
C206	403 149 9218	CERAMI C 0.01U Z 50V	C468	403 233 1111	ELECT 22U M 50V
C207	403 149 9218	CERAMI C 0.01U Z 50V	C481	403 076 1415	CERAMI C 2700P K 500V
C208	403 248 1618	16 YK 47 M TA 0511	C482	403 159 7409	MT- POLYEST 0.1U K 250V
C209	403 164 0214	CERAMI C 0.1U Z 25V	C501	403 194 3800	ELECT 2200U M 25V
C210	403 086 2300	NP- ELECT 1U M 50V	C502	403 217 1103	ELECT 220U M 35V
C211	403 113 3815	CERAMI C 1000P K 50V	C503	403 139 7514	CERAMI C 39P J 50V
C212	403 086 2300	NP- ELECT 1U M 50V	C512	403 194 3800	ELECT 2200U M 25V
C213	403 233 0817	ELECT 10U M 50V	C513	403 233 0817	ELECT 10U M 50V
C214	403 149 9218	CERAMI C 0.01U Z 50V	C514	403 233 0817	ELECT 10U M 50V
C216	403 233 0817	ELECT 10U M 50V	C600	403 076 4010	CERAMI C 4700P K 500V
C217	403 160 0020	ELECT 470U M 10V	C601	404 056 1408	MT- POLYEST 0.1U M 250V
C218	403 149 9218	CERAMI C 0.01U Z 50V	C602	404 056 1408	MT- POLYEST 0.1U M 250V
C219	403 155 2418	CERAMI C 5600P K 50V	C603	403 076 6727	CERAMI C DE0607- 486B102K1K
C220	403 207 0317	SMD 1MF GRM40Y5V105Z16PT	C604	403 076 6727	CERAMI C DE0607- 486B102K1K
C230	403 269 5916	CERAMI C 0.22U K 16V	C607	404 050 9509	ELECT 150U M 400V 85C
C231	403 113 4119	CERAMI C 2200P K 50V	C613	403 179 1213	POLYESTER 4700P J 50V
C232	403 233 3818	CERAMI C 10P C 50V	C614	403 237 8057	MT- COMPO 0.1U J 50V
C233	403 248 1618	16 YK 47 M TA 0511	C615	403 179 3217	POLYESTER 0.015U J 50V
C234	403 164 0214	CERAMI C 0.1U Z 25V	C616	403 165 6215	CERAMI C 1000P K 2K
C235	403 164 0214	CERAMI C 0.1U Z 25V	C617	403 179 2418	POLYESTER 0.022U K 50V
C236	403 164 0214	CERAMI C 0.1U Z 25V	△ C631	404 073 4505	DE1210- 1 E 222M- KX
C237	403 164 0214	CERAMI C 0.1U Z 25V	C633	403 214 4404	ELECT 470U M 35V
C240	403 113 4119	CERAMI C 2200P K 50V	C637	403 158 1309	ELECT 2200U M 35V
C241	403 067 7895	MT- COMPO 0.47 J 50V			

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
C640	403 218 8200	ELECT 2200U M 25V	D466	407 099 7812	ZENER DIODE MIZJT- 77- 20A
C641	403 165 6017	CERAM C 1000P K 1K	D469	407 007 7415	DIODE EU1 52MM
C642	404 085 6900	200YXF100MCA 100U M 200V	D481	407 005 9629	DIODE ERA22- 04- V1 52MM
C643	403 113 3815	CERAM C 1000P K 50V	D482	407 012 4416	DIODE 1SS133- T- 77
C646	403 165 6126	CERAM C 470P K 1K	D501	407 005 7328	DIODE EM01Z
C647	403 157 6810	CERAM C 680P K 50V	D502	407 118 2217	ZENER DIODE 1Z75
C648	403 038 1603	ELECT 100U M 6. 3V	D603	407 009 6921	DIODE RM11C
C649	403 195 8804	ELECT 100U M 16V	D604	407 009 6921	DIODE RM11C
C650	403 038 9708	ELECT 330U M 6. 3V	D605	407 009 6921	DIODE RM11C
C666	403 248 1618	16 YK 47 M TA 0511	D606	407 009 6921	DIODE RM11C
C682	403 258 3619	16 YK 33 M TA 0511	D614	408 007 8607	DIODE 1N4148
C685	403 248 1410	50 YK 1R0 M TA 0511	△ D615	407 173 2907	PHOTO COUPLE PC123F2
C801	403 149 9218	CERAM C 0. 01U Z 50V	D616	408 007 8607	DIODE 1N4148
C802	403 248 1618	16 YK 47 M TA 0511	D617	407 007 6606	DIODE ES1
C803	403 164 0214	CERAM C 0. 1U Z 25V	D618	408 007 8607	DIODE 1N4148
C807	403 164 0214	CERAM C 0. 1U Z 25V	D619	407 063 8319	Z. DIODE MIZJT- 77- 11C
C810	403 269 5916	CERAM C 0. 22U K 16V	D630	407 007 7613	DIODE EU2
C811	403 233 0817	ELECT 10U M 50V	△ D633	407 166 2303	DIODE ERC- 91- 02L
C812	403 164 0214	CERAM C 0. 1U Z 25V	△ D635	407 129 6706	DIODE RU4YX LF- L1
C814	403 155 2210	CERAM C 3300P K 50V	D637	407 012 4416	DIODE 1SS133- T- 77
C816	403 155 2319	CERAM C 4700P K 50V	D641	407 012 4416	DIODE 1SS133- T- 77
C817	403 145 9915	CERAM C 22P J 50V	D642	407 009 8816	DIODE RU3AM
C818	403 155 2319	CERAM C 4700P K 50V	D643	408 008 2406	DIODE 1N4148
C819	403 145 9915	CERAM C 22P J 50V	D644	408 008 2406	DIODE 1N4148
C822	403 113 4119	CERAM C 2200P K 50V	D645	407 099 5511	ZENER DIODE MIZJ6. 2C
C824	403 153 9310	CERAM C 82P J 50V	D646	407 012 4416	DIODE 1SS133- T- 77
C826	403 257 0817	50 YK OR47 M TA 0511	D647	407 012 4416	DIODE 1SS133- T- 77
C827	403 260 3030	ECQ- V1H564JL3 0. 56U J 50	D663	407 063 8319	Z. DIODE MIZJT- 77- 11C
C833	403 157 2515	CERAM C 27P J 50V	D666	407 063 8913	ZENER DIODE MIZJ5. 6C
C834	403 157 2515	CERAM C 27P J 50V	D683	408 008 2406	DIODE 1N4148
C835	403 155 2319	CERAM C 4700P K 50V	D685	407 099 5610	ZENER DIODE MIZ6. 8A 26MM
C836	403 157 2911	CERAM C 47P J 50V	D826	407 099 4811	Z DIODE MIZJ- T77- 4. 3B
C861	403 155 1312	CERAM C 150P J 50V	D831	407 012 4416	DIODE 1SS133- T- 77
DIODE			INTEGRATED CIRCUIT		
D041	408 008 2406	DIODE 1N4148	IC001	409 017 7505	IC LA4270
D1002	407 063 8319	Z. DIODE MIZJT- 77- 11C	IC001- 1	610 251 4186	AUDIO H/SINK ASSY EB6D
D1003	407 063 8319	Z. DIODE MIZJT- 77- 11C	IC001- 2	411 099 1500	SCR PAN+SW+W 3X12
D1007	407 063 8319	Z. DIODE MIZJT- 77- 11C	IC1201	409 161 3408	IC
D1008	407 063 8319	Z. DIODE MIZJT- 77- 11C	IC1202	409 268 8504	IC NJM2233BD
D101	407 100 0214	ZENER DIODE MIZJ36A	IC201	409 504 3300	IC TB1251CN VER 6. 3
D1010	407 063 8319	Z. DIODE MIZJT- 77- 11C	IC3451	409 476 9300	IC TDA9870A/V2
D1011	407 012 4416	DIODE 1SS133- T- 77	IC501	409 192 5709	IC LA7833
D1012	407 012 4416	DIODE 1SS133- T- 77	IC501- 1	610 282 6647	ASSY, HEAT SINK V- C2WC
D1013	407 012 4416	DIODE 1SS133- T- 77	IC501- 2	411 036 3208	SCR PAN+SW+W 3X10
D1014	407 012 4416	DIODE 1SS133- T- 77	IC641	409 241 5407	IC BA178M05T
D1015	407 012 4416	DIODE 1SS133- T- 77	IC642	409 367 2809	IC BA178M09T
D1016	407 012 4416	DIODE 1SS133- T- 77	IC643	409 241 5407	IC BA178M05T
D1021	407 063 8319	Z. DIODE MIZJT- 77- 11C	IC801	410 409 3609	IC ST92195C7B1/EXU 1PAGE
D1022	407 063 8319	Z. DIODE MIZJT- 77- 11C	IC803	409 343 6302	IC 24LC04B/P
D1023	407 063 8319	Z. DIODE MIZJT- 77- 11C	COIL		
D1024	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1003	610 078 5946	PIPE CORE
D1025	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1010	645 001 4550	PEAKING COIL 10UHK
D1026	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1011	645 001 4550	PEAKING COIL 10UHK
D1051	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1012	645 001 4550	PEAKING COIL 10UHK
D1052	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1013	645 001 4550	PEAKING COIL 10UHK
D1202	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1017	610 078 5946	PIPE CORE
D1203	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1020	645 001 4550	PEAKING COIL 10UHK
D1901	407 120 9706	LED LN28RPL	L1021	645 001 4550	PEAKING COIL 10UHK
D1901A	610 269 4703	HOLDER LED A- E6YC	L1022	645 001 4550	PEAKING COIL 10UHK
D3441	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1023	645 001 4550	PEAKING COIL 10UHK
D3442	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1202	645 003 8518	P. COIL LAP02TA4R7K 26MM
D3443	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1204	645 003 8518	P. COIL LAP02TA4R7K 26MM
D3444	407 063 8319	Z. DIODE MIZJT- 77- 11C	L1205	645 003 8518	P. COIL LAP02TA4R7K 26MM
△ D431	407 063 9613	ZENER DIODE MIZJ9. 1A	L1206	645 003 8518	P. COIL LAP02TA4R7K 26MM
D438	407 095 8001	DIODE ERD07- 15L	L121	645 001 4635	PEAKING COIL 15UH K
D439	407 006 4128	DIODE ERB44- 04V1	L122	645 002 1459	PEAKING COIL
D442	408 007 8607	DIODE 1N4148	L171	645 040 2715	TRANS, OSC 38. 9MHZ
D445	407 012 4416	DIODE 1SS133- T- 77	L240	645 001 4550	PEAKING COIL 10UHK
D446	407 063 9415	ZENER DIODE MIZJ8. 2A	L241	645 001 4550	PEAKING COIL 10UHK

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
L242	645 001 4550	PEAKING COIL 10UHK	Q685	405 014 4519	TR 2SC2412KT146/R
L3450	401 105 7919	MT-GLAZE 0.000 ZA 1/16W	Q686	405 134 5925	TR 2SA1037AK-T146-R
L3452	645 001 5441	PEAKING COIL	Q804	405 014 4519	TR 2SC2412KT146/R
L3456	645 001 5441	PEAKING COIL	Q805	405 014 4519	TR 2SC2412KT146/R
L3457	645 001 5441	PEAKING COIL	Q807	405 134 5925	TR 2SA1037AK-T146-R
L3459	645 018 9999	INDUCTOR, 120U	Q871	405 014 4519	TR 2SC2412KT146/R
L3469	645 003 8518	P. COIL LAP02TA4R7K 26MM			
L431	645 008 5628	INDUCTOR, 1U M			
L432	645 002 4511	CORE, PIPE			
L441	645 036 7380	COIL, LINEARITY			
L442	610 219 0342	COIL			
L461	645 005 5645	AR635LY-1038K 2200UHK			
L462	610 000 0261	COIL 349UH			
L501	645 008 5642	INDUCTOR, 3.3U K			
L601	645 019 3873	LINE FILTER- SAMWHA TECOM			
L607	610 237 1000	PIPE CORE			
L608	610 237 1000	PIPE CORE			
L635	610 078 5946	PIPE CORE			
L641	610 078 6820	PIPE CORE			
L801	645 003 8549	P. COIL LAP02TA5R6K 26MM			
L802	645 008 2887	P. COIL LAL02TB5R6K 52MM			
L803	645 003 8549	P. COIL LAP02TA5R6K 26MM			
L861	645 003 8549	P. COIL LAP02TA5R6K 26MM			
TRANSISTOR			RESISTOR		
Q002	405 014 4519	TR 2SC2412KT146/R	R001	401 027 2620	CARBON 5K6 JA 1/6W
Q005	405 014 4519	TR 2SC2412KT146/R	R002	401 105 0613	MT-GLAZE 10K JA 1/16W
Q042	405 014 4519	TR 2SC2412KT146/R	R003	401 105 5311	MT-GLAZE 4.7K JA 1/16W
Q043	405 134 5925	TR 2SA1037AK-T146-R	R004	401 026 1327	CARBON 27K JA 1/6W
Q1001	405 014 4519	TR 2SC2412KT146/R	R005	401 105 0613	MT-GLAZE 10K JA 1/16W
Q1002	405 134 5925	TR 2SA1037AK-T146-R	R006	401 026 1327	CARBON 27K JA 1/6W
Q1003	405 014 4519	TR 2SC2412KT146/R	R007	401 105 5311	MT-GLAZE 4.7K JA 1/16W
Q1006	405 134 5925	TR 2SA1037AK-T146-R	R008	401 027 2620	CARBON 5K6 JA 1/6W
Q1007	405 134 5925	TR 2SA1037AK-T146-R	R011	401 025 5425	CARBON 2R2 JA 1/4W 26MM
Q1008	405 134 5925	TR 2SA1037AK-T146-R	R012	401 025 5425	CARBON 2R2 JA 1/4W 26MM
Q1010	405 014 4519	TR 2SC2412KT146/R	R041	401 105 0613	MT-GLAZE 10K JA 1/16W
Q1011	405 014 4519	TR 2SC2412KT146/R	R046	401 105 6516	MT-GLAZE 680 JA 1/16W
Q1202	405 014 4519	TR 2SC2412KT146/R	R047	401 105 0613	MT-GLAZE 10K JA 1/16W
Q1203	405 014 4519	TR 2SC2412KT146/R	R048	401 105 0613	MT-GLAZE 10K JA 1/16W
Q1205	405 134 5925	TR 2SA1037AK-T146-R	R1000	401 026 7428	CARBON 39K JA 1/6W 26MM
Q1206	405 014 4519	TR 2SC2412KT146/R	R1001	401 105 4710	MT-GLAZE 39K JA 1/16W
Q121	405 014 4519	TR 2SC2412KT146/R	R1002	401 027 6628	CARBON 75 JA 1/6W
Q122	405 014 4519	TR 2SC2412KT146/R	R1003	401 027 6628	CARBON 75 JA 1/6W
Q131	405 134 5925	TR 2SA1037AK-T146-R	R1004	401 105 6011	MT-GLAZE 5.6K JA 1/16W
Q132	405 134 5925	TR 2SA1037AK-T146-R	R1005	401 027 6628	CARBON 75 JA 1/6W
Q133	405 014 4519	TR 2SC2412KT146/R	R1006	401 105 5212	MT-GLAZE 470 JA 1/16W
Q141	405 015 9721	TR 2SC2814-F4-TB	R1007	401 027 6628	CARBON 75 JA 1/6W
Q153	405 134 5925	TR 2SA1037AK-T146-R	R1008	401 105 5212	MT-GLAZE 470 JA 1/16W
Q242	405 134 5925	TR 2SA1037AK-T146-R	R1009	401 027 6628	CARBON 75 JA 1/6W
Q243	405 134 5925	TR 2SA1037AK-T146-R	R101	401 105 0415	MT-GLAZE 100 JA 1/16W
Q244	405 134 5925	TR 2SA1037AK-T146-R	R1010	401 026 9620	CARBON 470 JA 1/6W 26MM
Q3452	405 014 4519	TR 2SC2412KT146/R	R1011	401 027 6628	CARBON 75 JA 1/6W
Q3453	405 014 4519	TR 2SC2412KT146/R	R1012	401 105 2815	MT-GLAZE 2.2K JA 1/16W
Q3454	405 014 4519	TR 2SC2412KT146/R	R1013	401 105 2815	MT-GLAZE 2.2K JA 1/16W
Q3455	405 014 4519	TR 2SC2412KT146/R	R1014	401 105 5915	MT-GLAZE 560 JA 1/16W
Q431	405 018 0616	TR 2SC3332-S	R1015	401 105 5915	MT-GLAZE 560 JA 1/16W
Q432	406 015 2501	ON5111 (BU2708DX) PH.	R1016	401 105 4710	MT-GLAZE 39K JA 1/16W
Q432-1	610 252 1108	H HEAT SINK E7LC	R1017	401 027 6628	CARBON 75 JA 1/6W
Q461	405 064 7307	TR 2SB1274-Q-RA	R1018	401 027 6628	CARBON 75 JA 1/6W
Q461-1	610 251 5916	HEAT SINK PCC E7LC	R1019	401 027 6628	CARBON 75 JA 1/6W
Q462	406 007 2106	TR JC546A	R102	401 105 0415	MT-GLAZE 100 JA 1/16W
Q501	405 014 4519	TR 2SC2412KT146/R	R1020	401 105 2815	MT-GLAZE 2.2K JA 1/16W
Q611	406 007 1901	TR JC556A	R1021	401 105 2815	MT-GLAZE 2.2K JA 1/16W
Q612	405 058 0208	TR 2SC3807-R-CTV-YA	R1022	401 105 5915	MT-GLAZE 560 JA 1/16W
Q613	405 095 0407	TR 2SC4429-L-YB	R1023	401 105 5915	MT-GLAZE 560 JA 1/16W
Q613-1	610 251 5893	POW HEAT SINK E7LC	R1024	401 105 2914	MT-GLAZE 22K JA 1/16W
Q641	406 007 1901	TR JC556A	R1025	401 105 5311	MT-GLAZE 4.7K JA 1/16W
Q651	405 009 7003	TR 2SB985-S	R1026	401 105 0415	MT-GLAZE 100 JA 1/16W
Q661	405 009 7003	TR 2SB985-S	R1027	401 105 0514	MT-GLAZE 1K JA 1/16W
Q666	406 007 2007	TR JC546B	R1028	401 105 4017	MT-GLAZE 330 JA 1/16W
Q682	405 014 4519	TR 2SC2412KT146/R	R1029	401 025 8228	CARBON 22K JA 1/6W
			△ R103	401 061 4400	OXIDE-MT 33K JA 1W
			R1030	401 105 1511	MT-GLAZE 1.5K JA 1/16W
			R1031	401 105 0613	MT-GLAZE 10K JA 1/16W
			R1032	401 105 0613	MT-GLAZE 10K JA 1/16W
			R1033	401 105 0613	MT-GLAZE 10K JA 1/16W
			R1113	401 105 2914	MT-GLAZE 22K JA 1/16W
			R1201	401 105 3218	MT-GLAZE 270 JA 1/16W
			R1203	401 105 3218	MT-GLAZE 270 JA 1/16W
			R1215	401 105 0415	MT-GLAZE 100 JA 1/16W
			R1216	401 105 7315	MT-GLAZE 820 JA 1/16W
			R1217	401 105 5212	MT-GLAZE 470 JA 1/16W
			R1218	401 105 3416	MT-GLAZE 27K JA 1/16W
			R1219	401 105 0613	MT-GLAZE 10K JA 1/16W
			R1220	401 105 7315	MT-GLAZE 820 JA 1/16W
			R1221	401 105 7919	MT-GLAZE 0.000 ZA 1/16W
			R1224	401 105 2815	MT-GLAZE 2.2K JA 1/16W
			R1225	401 105 0514	MT-GLAZE 1K JA 1/16W

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R1226	401 105 1016	MT- GLAZE 1. 2K JA 1/16W	R3443	401 105 0613	MT- GLAZE 10K JA 1/16W
R1227	401 105 3218	MT- GLAZE 270 JA 1/16W	R3444	401 105 0613	MT- GLAZE 10K JA 1/16W
R1230	401 105 3218	MT- GLAZE 270 JA 1/16W	R3451	401 024 6720	CARBON 100 JA 1/6W 26MM
R124	401 105 3317	MT- GLAZE 2. 7K JA 1/16W	R3452	401 024 6720	CARBON 100 JA 1/6W 26MM
R126	401 105 2716	MT- GLAZE 220 JA 1/16W	R3453	401 105 0613	MT- GLAZE 10K JA 1/16W
R127	401 105 5915	MT- GLAZE 560 JA 1/16W	R3471	401 105 3218	MT- GLAZE 270 JA 1/16W
R128	401 105 0514	MT- GLAZE 1K JA 1/16W	R3473	401 105 5212	MT- GLAZE 470 JA 1/16W
R129	401 105 2716	MT- GLAZE 220 JA 1/16W	R3474	401 105 2815	MT- GLAZE 2. 2K JA 1/16W
R130	401 105 0514	MT- GLAZE 1K JA 1/16W	R3475	401 105 5212	MT- GLAZE 470 JA 1/16W
R131	401 105 2815	MT- GLAZE 2. 2K JA 1/16W	R3476	401 105 2815	MT- GLAZE 2. 2K JA 1/16W
R132	401 105 0514	MT- GLAZE 1K JA 1/16W	R3485	401 105 5212	MT- GLAZE 470 JA 1/16W
R133	401 105 0514	MT- GLAZE 1K JA 1/16W	R3486	401 105 2815	MT- GLAZE 2. 2K JA 1/16W
R134	401 105 0514	MT- GLAZE 1K JA 1/16W	R3487	401 105 5212	MT- GLAZE 470 JA 1/16W
R135	401 105 5212	MT- GLAZE 470 JA 1/16W	R3488	401 105 2815	MT- GLAZE 2. 2K JA 1/16W
R136	401 105 0415	MT- GLAZE 100 JA 1/16W	△ R430	401 065 2808	OXI DE- MT 120 JA 2W
R137	401 105 5212	MT- GLAZE 470 JA 1/16W	R432	401 105 0514	MT- GLAZE 1K JA 1/16W
R138	401 105 5212	MT- GLAZE 470 JA 1/16W	R433	401 007 1134	CARBON 1K JA 1/2W
R139	401 105 3119	MT- GLAZE 27 JA 1/16W	R434	401 105 0415	MT- GLAZE 100 JA 1/16W
R140	401 105 7919	MT- GLAZE 0. 000 ZA 1/16W	△ R435	402 068 0204	WI RE WOUND 10 JA 5W
R141	401 105 6011	MT- GLAZE 5. 6K JA 1/16W	R436	401 012 7049	CARBON 10K JA 1/4W
R142	401 105 0514	MT- GLAZE 1K JA 1/16W	R437	401 105 4017	MT- GLAZE 330 JA 1/16W
R143	401 105 7919	MT- GLAZE 0. 000 ZA 1/16W	△ R441	401 058 3706	OXI DE- MT 1K JA 1W
R144	401 105 2716	MT- GLAZE 220 JA 1/16W	R447	401 026 9927	CARBON 4K7 JA 1/6W
R149	401 027 2125	CARBON 56 JA 1/6W	R448	401 009 5843	CARBON 330 JA 1/2W
R153	401 105 5212	MT- GLAZE 470 JA 1/16W	R450	401 025 1922	CARBON 15K JA 1/6W
R154	401 105 7919	MT- GLAZE 0. 000 ZA 1/16W	△ R451	401 064 5305	OXI DE- MT 1. 5 JA 2W
R157	401 105 0613	MT- GLAZE 10K JA 1/16W	R453	401 024 7024	CARBON 1K JA 1/6W
R158	401 105 4710	MT- GLAZE 39K JA 1/16W	R454	401 014 6149	CARBON 150K JA 1/4W
R1901	401 105 1610	MT- GLAZE 15K JA 1/16W	R455	401 019 4031	CARBON 390K JA 1/4W
R1902	401 105 7414	MT- GLAZE 8. 2K JA 1/16W	R461	401 105 7919	MT- GLAZE 0. 000 ZA 1/16W
R1903	401 105 5311	MT- GLAZE 4. 7K JA 1/16W	R464	401 026 9927	CARBON 4K7 JA 1/6W
R1905	401 105 3317	MT- GLAZE 2. 7K JA 1/16W	R469	401 026 1327	CARBON 27K JA 1/6W
R1906	401 105 2815	MT- GLAZE 2. 2K JA 1/16W	R470	401 024 7727	CARBON 100K JA 1/6W
R1908	401 026 3935	CARBON 330 JA 1/6W 52MM	R471	401 027 5225	CARBON 680 JA 1/6W
R1909	401 105 1511	MT- GLAZE 1. 5K JA 1/16W	R473	401 027 5225	CARBON 680 JA 1/6W
R1910	401 105 0613	MT- GLAZE 10K JA 1/16W	R474	401 009 0927	CARBON 270 JA 1/2W
R201	401 105 1412	MT- GLAZE 150 JA 1/16W	R481	401 016 5843	CARBON 220K JA 1/4W
R202	401 105 3416	MT- GLAZE 27K JA 1/16W	R482	401 027 5522	CARBON 6K8 JA 1/6W
R211	401 105 0415	MT- GLAZE 100 JA 1/16W	R504	401 105 8114	MT- GLAZE 56K JA 1/16W
R212	401 026 0627	CARBON 270 JA 1/6W	R505	401 025 4626	CARBON 18K JA 1/6W
R213	401 105 3010	MT- GLAZE 220K JA 1/16W	R506	401 024 7430	CARBON 10K JA 1/6W
R214	401 024 6720	CARBON 1 00 JA 1/6W 26MM	R507	401 027 8127	CARBON 82 JA 1/6W
R215	401 024 6720	CARBON 100 JA 1/6W 26MM	△ R509	401 057 7507	OXI DE- MT 0. 82 JA 1W
R216	401 105 0613	MT- GLAZE 10K JA 1/16W	△ R512	401 062 1200	OXI DE- MT 470 JA 1W
R217	401 024 7430	CARBON 10K JA 1/6W	△ R515	402 037 1805	FUSI BLE RES 4. 7 J- 1W
R230	401 105 4215	MT- GLAZE 33K JA 1/16W	△ R518	401 062 1200	OXI DE- MT 470 JA 1W
R234	401 024 6720	CARBON 100 JA 1/6W 26MM	R523	401 105 5311	MT- GLAZE 4. 7K JA 1/16W
R235	401 024 6720	CARBON 100 JA 1/6W 26MM	△ R602	402 070 9806	WI RE W. ERF- 5ZYK1R8
R236	401 024 6720	CARBON 100 JA 1/6W 26MM	R611	401 027 2620	CARBON 5K6 JA 1/6W
R237	401 024 6720	CARBON 100 JA 1/6W 26MM	R615	401 025 8228	CARBON 22K JA 1/6W
R238	401 105 0415	MT- GLAZE 100 JA 1/16W	R617	401 024 9325	CARBON 1K2 JA 1/6W 26MM
R239	401 105 2815	MT- GLAZE 2. 2K JA 1/16W	R619	401 016 1538	CARBON 22 JA 1/4W
R240	401 105 0415	MT- GLAZE 100 JA 1/16W	R620	401 007 5815	CARBON 120K JA 1/2W
R241	401 105 2815	MT- GLAZE 2. 2K JA 1/16W	R621	401 007 5815	CARBON 120K JA 1/2W
R242	401 105 0415	MT- GLAZE 100 JA 1/16W	R622	401 014 5241	CARBON 15K JA 1/4W
R243	401 105 2815	MT- GLAZE 2. 2K JA 1/16W	R623	401 026 4328	CARBON 3K3 JA 1/6W
R244	401 105 4017	MT- GLAZE 330 JA 1/16W	△ R625	401 065 9609	OXI DE- MT 18 JA 2W
R245	401 218 4614	MT- GLAZE 5. 6K FA 1/16W	R626	401 015 2219	CARBON 1. 8K GA 1/4W
R246	401 105 4710	MT- GLAZE 39K JA 1/16W	△ R628	401 068 6902	OXI DE- MT 56 JA 2W
R247	401 105 7919	MT- GLAZE 0. 000 ZA 1/16W	△ R631	402 000 8602	SOLI D 5. 6M KA 1/2W 52AMMO
R248	401 105 7513	MT- GLAZE 82K JA 1/16W	△ R632	402 000 8602	SOLI D 5. 6M KA 1/2W 52AMMO
R251	401 105 1214	MT- GLAZE 120K JA 1/16W	R636	401 024 7430	CARBON 10K JA 1/6W
R253	401 024 7727	CARBON 100K JA 1/6W	△ R637	402 067 3305	WI RE WOUND 4. 7 KA 5W
R254	401 105 0712	MT- GLAZE 100K JA 1/16W	R641	401 027 4307	CARBON 6. 2K JA 1/6W
R255	401 105 8114	MT- GLAZE 56K JA 1/16W	R642	401 014 6149	CARBON 150K JA 1/4W
R256	401 105 0514	MT- GLAZE 1K JA 1/16W	R643	401 009 3116	CARBON 3. 3JA 1/2W 52MM
R257	401 105 0514	MT- GLAZE 1K JA 1/16W	△ R644	401 065 9609	OXI DE- MT 18 JA 2W
R258	401 105 0514	MT- GLAZE 1K JA 1/16W	R645	401 016 4836	CARBON 22K JA 1/4W
R3441	401 105 0613	MT- GLAZE 10K JA 1/16W	R646	401 015 4738	CARBON 180K JA 1/4W
R3442	401 105 0613	MT- GLAZE 10K JA 1/16W	R647	401 011 2718	CARBON 68K JA 1/2W

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R648	401 067 4206	OXIDE-MT 33 JA 2W	F601B	645 000 5077	HOLDER, FUSE
R651	401 012 7049	CARBON 10K JA 1/4W	JS100	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R652	401 021 3049	CARBON 5. 6K JA 1/4W	JS101	401 105 2716	MT- GLAZE 220 JA 1/16W
R653	401 105 2914	MT- GLAZE 22K JA 1/16W	JS102	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R654	401 105 0613	MT- GLAZE 10K JA 1/16W	JS116	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R661	401 012 7049	CARBON 10K JA 1/4W	JS3472	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R663	401 013 5341	CARBON 1K2 JA 1/4W	JS443	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
△ R666	401 062 5109	OXIDE-MT 56 JA 1W	JS601	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R667	401 027 2333	CARBON 560 JA 1/6W 52MM	JS806	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R668	401 008 8627	CARBON 220K JA 1/2W	J107	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R681	401 105 0613	MT- GLAZE 10K JA 1/16W	J1215	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R686	401 016 5843	CARBON 220K JA 1/4W	J1216	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R687	401 105 6110	MT- GLAZE 560K JA 1/16W	J1218	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R688	401 105 0613	MT- GLAZE 10K JA 1/16W	J1219	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R689	401 105 2914	MT- GLAZE 22K JA 1/16W	J204	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R808	401 105 0415	MT- GLAZE 100 JA 1/16W	J224	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R815	401 024 6720	CARBON 100 JA 1/6W 26MM	J240	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R823	401 024 6720	CARBON 100 JA 1/6W 26MM	J243	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R824	401 024 6720	CARBON 100 JA 1/6W 26MM	J245	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R827	401 024 6720	CARBON 100 JA 1/6W 26MM	J325	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R829	401 105 4215	MT- GLAZE 33K JA 1/16W	J332	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R830	401 105 4215	MT- GLAZE 33K JA 1/16W	J334	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R831	401 024 7430	CARBON 10K JA 1/6W	J335	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R832	401 024 7430	CARBON 10K JA 1/6W	J336	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R838	401 105 6011	MT- GLAZE 5. 6K JA 1/16W	J346	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R839	401 105 6011	MT- GLAZE 5. 6K JA 1/16W	J408	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R840	401 024 7024	CARBON 1K JA 1/6W	J416	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R842	401 105 1610	MT- GLAZE 15K JA 1/16W	J519	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R843	401 105 2716	MT- GLAZE 220 JA 1/16W	J520	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R844	401 105 2716	MT- GLAZE 220 JA 1/16W	J521	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R845	401 105 2716	MT- GLAZE 220 JA 1/16W	J530	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R846	401 105 2013	MT- GLAZE 1. 8K JA 1/16W	J531	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R847	401 105 3317	MT- GLAZE 2. 7K JA 1/16W	J532	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R848	401 105 3317	MT- GLAZE 2. 7K JA 1/16W	J539	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R849	401 105 3317	MT- GLAZE 2. 7K JA 1/16W	J617	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R851	401 105 1917	MT- GLAZE 180 JA 1/16W	J624	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R852	401 105 3416	MT- GLAZE 27K JA 1/16W	J631	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R853	401 105 2914	MT- GLAZE 22K JA 1/16W	J840	401 105 7919	MT- GLAZE 0.000 ZA 1/16W
R854	401 026 9927	CARBON 4K7 JA 1/6W	KCPA	645 006 1905	HSG PLUG 5P S5B- XH- A JST
R855	401 027 5522	CARBON 6K8 JA 1/6W	KDY- 1	645 008 4058	TERMI NAL PLUG
R856	401 105 6011	MT- GLAZE 5. 6K JA 1/16W	KDY- 3	645 008 4058	TERMI NAL PLUG
R857	401 105 4215	MT- GLAZE 33K JA 1/16W	KDY- 5	645 008 4058	TERMI NAL PLUG
R859	401 105 7919	MT- GLAZE 0.000 ZA 1/16W	KDY- 6	645 008 4058	TERMI NAL PLUG
R860	401 105 3218	MT- GLAZE 270 JA 1/16W	△ KE- 1	645 008 4058	TERMI NAL PLUG
R861	401 105 6516	MT- GLAZE 680 JA 1/16W	KE- 2	645 008 4058	TERMI NAL PLUG
R862	401 105 7414	MT- GLAZE 8. 2K JA 1/16W	KEM2	645 008 4058	TERMI NAL PLUG
R863	401 105 1610	MT- GLAZE 15K JA 1/16W	△ KF- 1	645 008 4058	TERMI NAL PLUG
R872	401 105 0613	MT- GLAZE 10K JA 1/16W	KF- 2	645 008 4058	TERMI NAL PLUG
R873	401 105 0613	MT- GLAZE 10K JA 1/16W	KGG- 1	645 008 4058	TERMI NAL PLUG
R874	401 105 5212	MT- GLAZE 470 JA 1/16W	KGG- 2	645 008 4058	TERMI NAL PLUG
R875	401 026 9620	CARBON 470 JA 1/6W 26MM	KL	645 004 2881	PLUG, 2P
R876	401 105 4512	MT- GLAZE 390 JA 1/16W	KP	645 008 7288	HOUSING PLUG 5P
R877	401 105 1016	MT- GLAZE 1. 2K JA 1/16W	KQ	645 008 7264	HOUSING PLUG 3P
R878	401 105 0514	MT- GLAZE 1K JA 1/16W	KR- 1	645 008 4058	TERMI NAL PLUG
R880	401 105 4710	MT- GLAZE 39K JA 1/16W	KR- 2	645 008 4058	TERMI NAL PLUG
R881	401 105 0514	MT- GLAZE 1K JA 1/16W	K1001	645 005 5867	21- PIN SOCKET
			K1002	645 005 5867	21- PIN SOCKET
			PS601	408 013 3801	TH PTH451C262BF140M270
			SW1901	610 011 4432	SWI TCH, PUSH
			SW1902	610 011 4432	SWI TCH, PUSH
			SW1903	610 011 4432	SWI TCH, PUSH
			SW1904	610 011 4432	SWI TCH, PUSH
			SW501	610 011 2728	SWI TCH, LEVER 1P- 3T
			△ SW601	645 024 0607	PUSH SW POWER SDDFC3
			TP- A	645 008 4058	TERMI NAL PLUG
			TP- B	645 008 4058	TERMI NAL PLUG
			X121	610 015 3547	CERAMI C TRAP
			X131A	421 007 8606	SAW F TSB5387P
			X132	421 002 2609	SAW F TSF5315
			X231	645 025 1122	XTAL 4. 433619MHZ 16PF KSS
TRANSFORMER					
	T431	610 000 1077 DRIVE TRANS			
△	T451	645 038 7616 TRANS, FLYBACK EB6 4X3 28			
△	T611	645 047 8024 TRANS 10735340P1 SMT4			
VARIABLE RESISTOR					
	VR641	645 006 5514 VR, SEMI, 2. 2K N			
MISCELLANEOUS					
	A101	645 040 4528 TUNER, U/V			
	A1901	645 028 1044 REMO REC SPS- 443- 1- E			
△	F601	423 022 2102 FUSE 250V 4. 0A			
	F601A	645 000 5077 HOLDER, FUSE			

Ref. No.	Part No.	Description
X3451	645 024 7484	OSC. CRYSTAL 24.576MHZ
X801	610 282 0201	XTAL. OSC 4.00MHZ 5MM
Z101	610 282 9693	SHD. CASE EB6 6 CUTT+5HOLE
Z102	610 282 9709	SHIELD CASE C2HC-B

Ref. No.	Part No.	Description
----------	----------	-------------

All information in this manual is correct at the start of production. Sanyo reserves the right to modify components and procedures in order to comply with their continuous improvement policy.

1AA0B10E595B0 ASSY,PWB,CRT C2WBV

CAPACITOR

C702	403 074 5712	CERAMIC	560P K	50V
C712	403 074 5712	CERAMIC	560P K	50V
C722	403 074 5712	CERAMIC	560P K	50V
C731	403 077 2728	CERAMIC	1000P P	2K
C732	403 074 5712	CERAMIC	560P K	50V
C733	610 237 1000	PIPE CORE		
C735	403 281 1108	ELECT	22U M	250V
C751	403 201 5011	ELECT	330U M	16V

DIODE

D701	407 012 4416	DIODE	1SS133-T-77
D711	407 012 4416	DIODE	1SS133-T-77
D721	407 012 4416	DIODE	1SS133-T-77
D751	407 012 4416	DIODE	1SS133-T-77

COIL

L701	645 007 9856	PEAKING COIL	220UH K
L711	645 007 9856	PEAKING COIL	220UH K
L712	645 007 9856	PEAKING COIL	220UH K

TRANSISTOR

Q701	405 041 6507	TR	2SC2621-D-RA
Q711	405 041 6507	TR	2SC2621-D-RA
Q721	405 041 6507	TR	2SC2621-D-RA
Q740	406 007 1901	TR	JC556A
Q751	406 007 1901	TR	JC556A

RESISTOR

R702	401 025 7429	CARBON	220 JA	1/6W
△ R704	401 065 4604	OXIDE-MT	12K JA	2W
R705	401 009 6622	CARBON	3.3K JA	1/2W
R712	401 025 7429	CARBON	220 JA	1/6W
△ R714	401 065 4604	OXIDE-MT	12K JA	2W
R715	401 009 6622	CARBON	3.3K JA	1/2W
R722	401 025 7429	CARBON	220 JA	1/6W
△ R724	401 065 4604	OXIDE-MT	12K JA	2W
R725	401 009 6622	CARBON	3.3K JA	1/2W
R741	401 024 9325	CARBON	1K2 JA	1/6W 26MM
R742	401 027 2620	CARBON	5K6 JA	1/6W
R744	401 027 5225	CARBON	680 JA	1/6W
R752	401 024 7430	CARBON	10K JA	1/6W
R753	401 024 7430	CARBON	10K JA	1/6W
R756	401 026 9620	CARBON	470 JA	1/6W 26MM
R758	401 026 9620	CARBON	470 JA	1/6W 26MM
R759	401 026 9620	CARBON	470 JA	1/6W 26MM

MISCELLANEOUS

K7D1	645 008 4058	TERMINAL PLUG
K7M	645 008 4058	TERMINAL PLUG
K7P	645 008 7288	HOUSING PLUG 5P
K7Q	645 008 7264	HOUSING PLUG 3P
△ K701	645 031 7699	CRT SKT. HPS-014103

1AA0B10H047B0 ASSY,PWB,HARMONICS EB6 AC

COIL

△ L1601	645 042 6735	CHOKE, ETQR42T004B PANA
---------	--------------	-------------------------

MISCELLANEOUS

△ K16H-1	645 008 4058	TERMINAL PLUG
△ K16H-2	645 008 4058	TERMINAL PLUG



Sanyo Industries (UK) Ltd
Printed in UK