




SERVICE MANUAL

DVD Player + Video Cassette Recorder

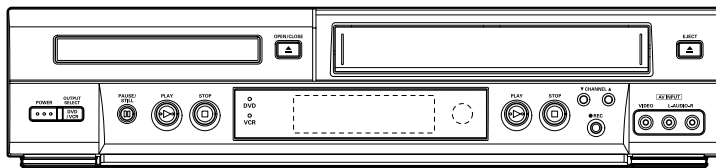

HV-DX1E

(Product Code : 143 187 02)
(U.K.)

HV-DX1EV

(Product Code : 143 187 03)
(Europe)

HV-DX1SP

(Product Code : 143 187 04)
(Spain)

CAUTION

This product utilizes a laser.

The adjustment other than those specified herein may result in hazardous radiation exposure.

CONTENTS

SECTION 1 SUMMARY

SECTION 2 CABINET & MAIN CHASSIS

SECTION 3 ELECTRICAL

SECTION 4 MECHANISM OF VCR PART

SECTION 5 MECHANISM OF DVD PART

SECTION 6 REPLACEMENT PARTS LIST

SECTION 1

SUMMARY

CONTENTS

PRODUCT SAFETY SERVICING GUIDELINES FOR VIDEO PRODUCTS	1-3
SERVICING PRECAUTIONS	1-4
• GENERAL SERVICING PRECAUTIONS	
• INSULATION CHECKING PROCEDURE	
• ELECTROSTATICALLY SENSITIVE (ES) DEVICES	
SERVICE INFORMATION FOR EEPROM IC SETTING	1-5
SPECIFICATIONS	1-6

PRODUCT SAFETY SERVICING GUIDELINES FOR VIDEO PRODUCTS

CAUTION : DO NOT ATTEMPT TO MODIFY THIS PRODUCT IN ANY WAY, NEVER PERFORM CUSTOMIZED INSTALLATIONS WITHOUT MANUFACTURER'S APPROVAL. UNAUTHORIZED MODIFICATIONS WILL NOT ONLY VOID THE WARRANTY, BUT MAY LEAD TO YOUR BEING LIABLE FOR ANY RESULTING PROPERTY DAMAGE OR USER INJURY.

SERVICE WORK SHOULD BE PERFORMED ONLY AFTER YOU ARE THOROUGHLY FAMILIAR WITH ALL OF THE FOLLOWING SAFETY CHECKS AND SERVICING GUIDELINES. TO DO OTHERWISE, INCREASES THE RISK OF POTENTIAL HAZARDS AND INJURY TO THE USER.

WHILE SERVICING, USE AN ISOLATION TRANSFORMER FOR PROTECTION FROM A.C. LINE SHOCK.


SAFETY CHECKS

AFTER THE ORIGINAL SERVICE PROBLEM HAS BEEN CORRECTED, A CHECK SHOULD BE MADE OF THE FOLLOWING.

SUBJECT : FIRE & SHOCK HAZARD

1. BE SURE THAT ALL COMPONENTS ARE POSITIONED IN SUCH A WAY AS TO AVOID POSSIBILITY OF ADJACENT COMPONENT SHORTS. THIS IS ESPECIALLY IMPORTANT ON THOSE MODULES WHICH ARE TRANSPORTED TO AND FROM THE REPAIR SHOP.
2. NEVER RELEASE A REPAIR UNLESS ALL PROTECTIVE DEVICES SUCH AS INSULATORS, BARRIERS, COVERS, SHIELDS, STRAIN RELIEFS, POWER SUPPLY CORDS, AND OTHER HARDWARE HAVE BEEN REINSTALLED PER ORIGINAL DESIGN. BE SURE THAT THE SAFETY PURPOSE OF THE POLARIZED LINE PLUG HAS NOT BEEN DEFEATED.
3. SOLDERING MUST BE INSPECTED TO DISCOVER POSSIBLE COLD SOLDER JOINTS, SOLDER SPLASHES OR SHARP SOLDER POINTS. BE CERTAIN TO REMOVE ALL LOOSE FOREIGN PARTICLES.
4. CHECK FOR PHYSICAL EVIDENCE OF DAMAGE OR DETERIORATION TO PARTS AND COMPONENTS. FOR FRAYED LEADS, DAMAGED INSULATION (INCLUDING A.C. CORD), AND REPLACE IF NECESSARY FOLLOW ORIGINAL LAYOUT, LEAD LENGTH AND DRESS.
5. NO LEAD OR COMPONENT SHOULD TOUCH A RECEIVING TUBE OR A RESISTOR RATED AT 1 WATT OR MORE. LEAD TENSION AROUND PROTRUDING METAL SURFACES MUST BE AVOIDED.
6. ALL CRITICAL COMPONENTS SUCH AS FUSES, FLAMEPROOF RESISTORS, CAPACITORS, ETC. MUST BE REPLACED WITH EXACT FACTORY TYPES. DO NOT USE REPLACEMENT COMPONENTS OTHER THAN THOSE SPECIFIED OR MAKE UNRECOMMENDED CIRCUIT MODIFICATIONS.
7. AFTER RE-ASSEMBLY OF THE SET ALWAYS PERFORM AN A.C. LEAKAGE TEST ON ALL EXPOSED METALLIC PARTS OF THE CABINET, (THE CHANNEL SELECTOR KNOB, ANTENNA TERMINALS, HANDLE AND SCREWS) TO BE SURE THE SET IS SAFE TO OPERATE WITHOUT DANGER OF ELECTRICAL SHOCK. DO NOT USE A LINE ISOLATION TRANSFORMER DURING THIS TEST USE AN A.C. VOLT-METER, HAVING 5000 OHMS PER VOLT OR MORE SENSITIVITY, IN THE FOLLOWING MANNER; CONNECT A 1500 OHM 10 WATT RESISTOR, PARALLELED BY A .15 MFD. 150.V A.C TYPE CAPACITOR BETWEEN A KNOWN GOOD EARTH GROUND (WATER PIPE, CONDUIT, ETC.) AND THE EXPOSED METALLIC PARTS, ONE AT A TIME. MEASURE THE A.C. VOLTAGE ACROSS THE COMBINATION OF 1500 OHM RESISTOR AND .15 MFD CAPACITOR. REVERSE THE A.C. PLUG AND REPEAT A.C. VOLTAGE MEASUREMENTS FOR EACH EXPOSED METALLIC PART. VOLTAGE MEASURED MUST NOT EXCEED 75 VOLTS R.M.S. THIS CORRESPONDS TO 0.5 MILLIAMPS A.C ANY VALUE EXCEEDING THIS LIMIT CONSTITUTES A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED IMMEDIATELY.

A.C. VOLTMETER



GOOD EARTH GROUND
SUCH AS THE WATER
PIPE, CONDUIT, ETC

PLACE THIS PROBE
ON EACH EXPOSED
METAL PART

SUBJECT: GRAPHIC SYMBOLS



THE LIGHTNING FLASH WITH APROWHEAD SYMBOL, WITHIN AN EQUILATERAL TRIANGLE, IS INTENDED TO ALERT THE SERVICE PERSONNEL TO THE PRESENCE OF UNINSULATED "DANGEROUS VOLTAGE" THAT MAY BE OF SUFFICIENT MAGNITUDE TO CONSTITUTE A RISK OF ELECTRIC SHOCK.



THE EXCLAMATION POINT WITHIN AN EQUILATERAL TRIANGLE IS INTENDED TO ALERT THE SERVICE PERSONNEL TO THE PRESENCE OF IMPORTANT SAFETY INFORMATION IN SERVICE LITERATURE.

SUBJECT : X-RADIATION

1. BE SURE PROCEDURES AND INSTRUCTIONS TO ALL SERVICE PERSONNEL COVER THE SUBJECT OF X-RADIATION. THE ONLY POTENTIAL SOURCE OF X-RAYS IN CURRENT T.V. RECEIVERS IS THE PICTURE TUBE. HOWEVER, THIS TUBE DOES NOT EMIT X-RAYS WHEN THE HIGH VOLTAGE IS AT THE FACTORY SPECIFIED LEVEL. THE PROPER VALUE IS GIVEN IN THE APPLICABLE SCHEMATIC. OPERATION AT HIGHER VOLTAGES MAY CAUSE A FAILURE OF THE PICTURE TUBE OR HIGH VOLTAGE SUPPLY AND, UNDER CERTAIN CIRCUMSTANCES, MAY PRODUCE RADIATION IN EXCESS OF DESIRABLE LEVELS.
2. ONLY FACTORY SPECIFIED C.R.T. ANODE CONNECTORS MUST BE USED. DEGAUSSING SHIELDS ALSO SERVE AS X-RAY SHIELD IN COLOR SETS, ALWAYS RE-INSTALL THEM.
3. IT IS ESSENTIAL THAT SERVICE PERSONNEL HAVE AVAILABLE AN ACCURATE AND RELIABLE HIGH VOLTAGE METER. THE CALIBRATION OF THE METER SHOULD BE CHECKED PERIODICALLY AGAINST A REFERENCE STANDARD, SUCH AS THE ONE AVAILABLE AT YOUR DISTRIBUTOR.
4. WHEN THE HIGH VOLTAGE CIRCUITRY IS OPERATING PROPERLY THERE IS NO POSSIBILITY OF AN X-RADIATION PROBLEM. EVERY TIME A COLOR CHASSIS IS SERVICED, THE BRIGHTNESS SHOULD BE RUN UP AND DOWN WHILE MONITORING THE HIGH VOLTAGE WITH A METER TO BE CERTAIN THAT THE HIGH VOLTAGE DOES NOT EXCEED THE SPECIFIED VALUE AND THAT IT IS REGULATING CORRECTLY, WE SUGGEST THAT YOU AND YOUR SERVICE ORGANIZATION REVIEW TEST PROCEDURES SO THAT VOLTAGE REGULATION IS ALWAYS CHECKED AS A STANDARD SERVICING PROCEDURE. AND THAT THE HIGH VOLTAGE READING BE RECORDER ON EACH CUSTOMER'S INVOICE.
5. WHEN TROUBLESHOOTING AND MAKING TEST MEASUREMENTS IN A PRODUCT WITH A PROBLEM OF EXCESSIVE HIGH VOLTAGE, AVOID BEING UNNECESSARILY CLOSE TO THE PICTURE TUBE AND THE HIGH VOLTAGE SUPPLY. DO NOT OPERATE THE PRODUCT LONGER THAN IS NECESSARY TO LOCATE THE CAUSE OF EXCESSIVE VOLTAGE.
6. REFER TO HV, B+ AND SHUTDOWN ADJUSTMENT PROCEDURES DESCRIBED IN THE APPROPRIATE SCHEMATIC AND DIAGRAMS (WHERE USED).

SUBJECT: IMPLOSION

1. ALL DIRECT VIEWED PICTURE TUBES ARE EQUIPPED WITH AN INTEGRAL IMPLOSION PROTECTION SYSTEM, BUT CARE SHOULD BE TAKEN TO AVOID DAMAGE DURING INSTALLATION, AVOID SCRATCHING THE TUBE. IF SCRATCHED REPLACE IT.

2. USE ONLY RECOMMENDED FACTORY REPLACEMENT TUBES.

SUBJECT : TIPS ON PROPER INSTALLATION

1. NEVER INSTALL ANY PRODUCT IN A CLOSED-IN RECESS, CUBBY-HOLE OR CLOSELY FITTING SHELF SPACE. OVER OR CLOSE TO HEAT DUCT, OR IN THE PATH OF HEATED AIR FLOW.
2. AVOID CONDITIONS OF HIGH HUMIDITY SUCH AS: OUTDOOR PATIO INSTALLATIONS WHERE DEW IS A FACTOR, NEAR STEAM RADIATORS WHERE STEAM LEAKAGE IS A FACTOR, ETC.
3. AVOID PALCEMENT WHERE DRAPERIES MAY OBSTRUCT REAR VENTING. THE CUSTOMER SHOULD ALSO AVOID THE USE OF DECORATIVE SCARVES OR OTHER COVERINGS WHICH MIGHT OBSTRUCT VENTILATION.
4. WALL AND SHELF MOUNTED INSTALLATIONS USING A COMMERCIAL MOUNTING KIT. MUST FOLLOW THE FACTORY APPROVED MOUNTING INSTRUCTIONS A PRODUCT MOUNTED TO A SHELF OR PLATFORM MUST RETAIN ITS ORIGINAL FEET (OR THE EQUIVALENT THICKNESS IN SPACERS) TO PROVIDE ADEQUATE AIR FLOW ACROSS THE BOTTOM, BOLTS OR SCREWS USED FOR FASTENERS MUST NOT TOUCH ANY PARTS OR WIRING. PERFORM LEAKAGE TEST ON CUSTOMIZED INSTALLATIONS.
5. CAUTION CUSTOMERS AGAINST THE MOUNTING OF A PRODUCT ON SLOPING SHELF OR A TILTED POSITION, UNLESS THE PRODUCT IS PROPERLY SECURED.
6. A PRODUCT ON A ROLL-ABOUT CART SHOULD BE STABLE ON ITS MOUNTING TO THE CART. CAUTION THE CUSTOMER ON THE HAZARDS OF TRYING TO ROLL A CART WITH SMALL CASTERS ACROSS THRESHOLDS OR DEEP PILE CARPETS.
7. CAUTION CUSTOMERS AGAINST THE USE OF A CART OR STAND WHICH HAS NOT BEEN LISTED BY UNDERWRITERS LABORATORIES, INC. FOR USE WITH THEIR SPECIFIC MODEL OF TELEVISION RECEIVER OR GENERALLY APPROVED FOR USE WITH T.V.'S OF THE SAME OR LARGER SCREEN SIZE.
8. CAUTION CUSTOMERS AGAINST THE USE OF EXTENSION CORDS, EXPLAIN THAT A FOREST OF EXTENSIONS SPROUTING FROM A SINGLE OUTLET CAN LEAD TO DISASTROUS CONSEQUENCES TO HOME AND FAMILY.

SERVICING PRECAUTIONS

CAUTION : Before servicing the VCR+DVD covered by this service data and its supplements and addends, read and follow the **SAFETY PRECAUTIONS**. **NOTE :** if unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions in this publications, always follow the safety precautions.

Remembers Safety First:

General Servicing Precautions

1. Always unplug the VCR+DVD AC power cord from the AC power source before:
 - (1) Removing or reinstalling any component, circuit board, module, or any other assembly.
 - (2) Disconnection or reconnecting any internal electrical plug or other electrical connection.
 - (3) Connecting a test substitute in parallel with an electrolytic capacitor.
Caution : A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.
2. Do not spray chemicals on or near this VCR+DVD or any of its assemblies.
3. Unless specified otherwise in this service data, clean electrical contacts by applying an appropriate contact cleaning solution to the contacts with a pipe cleaner, cotton-tipped swab, or comparable soft applicator. Unless specified otherwise in this service data, lubrication of contacts is not required.
4. Do not defeat any plug/socket B+ voltage interlocks with which instruments covered by this service manual might be equipped.
5. Do not apply AC power to this VCR+DVD and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
6. Always connect test instrument ground lead to the appropriate ground before connection the test instrument positive lead. Always remove the test instrument ground lead last.

Insulation Checking Procedure

Disconnect the attachment plug from the AC outlet and turn the power on. Connect an insulation resistance meter(500V) to the blades of the attachment plug. The insulation resistance between each blade of the attachment plug and accessible conductive parts (Note 1) should be more than 1M-ohm.

Note 1 : Accessible Conductive Parts including Metal panels, Input terminals, Earphone jacks, etc.

Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field effect transistors and semiconductor chip components.

The following techniques should be used to help reduce the incidence of component damage caused by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified a "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charge sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil, or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution : Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Normally harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

SERVICE INFORMATION FOR EEPROM IC SETTING

EEPROM option code No. setting

NAME	HEX	BINARY
OPT1	00	00000000
OPT2	00	00000000
OPT3	00	00000000
OPT4	00	00000000
OPT5	00	00000000
OPT6	00	00000000

WR : OK I : EXIT MOVE : ◀ ▶
 EDIT : ▲ ▼

MASKROM : R00
 EEPROM : R00 LG CODE

MODEL	NAME	HEX	BINARY
HV-DX1EV	FC	00	00000000
	61	00	00000000
	89	00	00000000
	E1	00	00000000
	31	00	00000000
	08	00	00000000
HV-DX1SP	FC	00	00000000
	61	00	00000000
	89	00	00000000
	F1	00	00000000
	54	00	00000000
	08	00	00000000
HV-DX1E	BC	00	00000000
	61	00	00000000
	80	00	00000000
	F3	00	00000000
	D0	00	00000000
	03	00	00000000

WR : OK I : EXIT MOVE : ◀ ▶
 EDIT : ▲ ▼

EEPROM option code No. setting procedure

1. DETECT NEW EEPROM (OPTION EDIT SCREEN)
 - Eeprom EDIT screen automatically appears if replacing Eeprom.
 - Setup option data using the cursor Up/Down key of a remote control.
(Setup upon BOM depending on OPT1~OPT6 model)
 - Since an initial remote control is set to LG for LG model, appropriately set option data using the cursor Up/Down key.
 - For SANYO model, change a remote key by using following JIG key.
SANYO MODEL : FRONT DVD/VCR + FRONT CH UP (LG/SANYO CODE)
2. EEPROM WRITING COMPLETE SCREEN
 - Writes data on EEPROM by using REMOCON "OK".
 - If completing the option data screen with a menu key, Powering Off is automatically done and the option edit screen is arranged.
3. PG ADJUST
 - Plays PAL SP TAPE for adjusting the AUTO PG.
 - A 0:00:00 is played in the field if pressing the front play with Remocon number "1" key played during PAL SP.
 - The 0:00:00 in the field represents position of the TRACKING PRESET.
 - "OFF" is displayed in the field if pressing the front play key with the remote number "1" in the status of the tracking preset pressed, and "ON" is displayed in the field if AUTO PG operation is automatically performed and completed.
 - DECK STOP > plays if above operation is completed. Set operation is performed depending on changed PG values. These values are stored in the EEPROM area.
4. EEPROM INITIAL
 - SETUP is displayed in the field if pressing the FRONT REC KEY with the remote number "CLEAR" key pressed in the status of powering Off.
 - AUTO SEARCH is done since the initial screen of ACMS is serviced if powering On.
 - Check basic operation (PLAY/RECORD...)

SPECIFICATIONS

GENERAL PART

Power supply	AC 200~240V, 50 Hz
Power consumption	23W
Mass	5.4kg
External dimensions	430 x 97.5 x 360 (W x H x D)
Signal system	PAL 625/50, NTSC 525/60

DVD PART

Laser	Semiconductor laser, wavelength 650nm
Frequency range (digital audio)	4 Hz to 20 kHz
Signal-to-noise ratio (digital audio)	More than 100 dB (EIAJ)
Audio dynamic range (digital audio)	More than 95 dB (EIAJ)
Harmonic distortion(digital audio)	0.008%
Wow and flutter	Below measurable level (less than +0.001%(W.PEAK)) (EIAJ)
Operations	Temperature : 5°C(41°F) to 35°C(95°F), Operation status : Horizontal

OUTPUTS

VHS PART

Video Head System	Double azimuth 4 heads, helical scanning
Tape format	Tape width 12.7 mm (0.5 inch)
Timer	24 hours display type

*Designs and specifications are subject to change without notice.

*Weight and dimensions shown are approximate.

SECTION 2
CABINET & MAIN CHASSIS


CONTENTS

1. EXPLODED VIEWS2-2


- 1. Cabinet and Main Frame Section2-2**
- 2. Packing Accessory Section2-3**

EXPLODED VIEWS

1. Cabinet and Main Frame Section

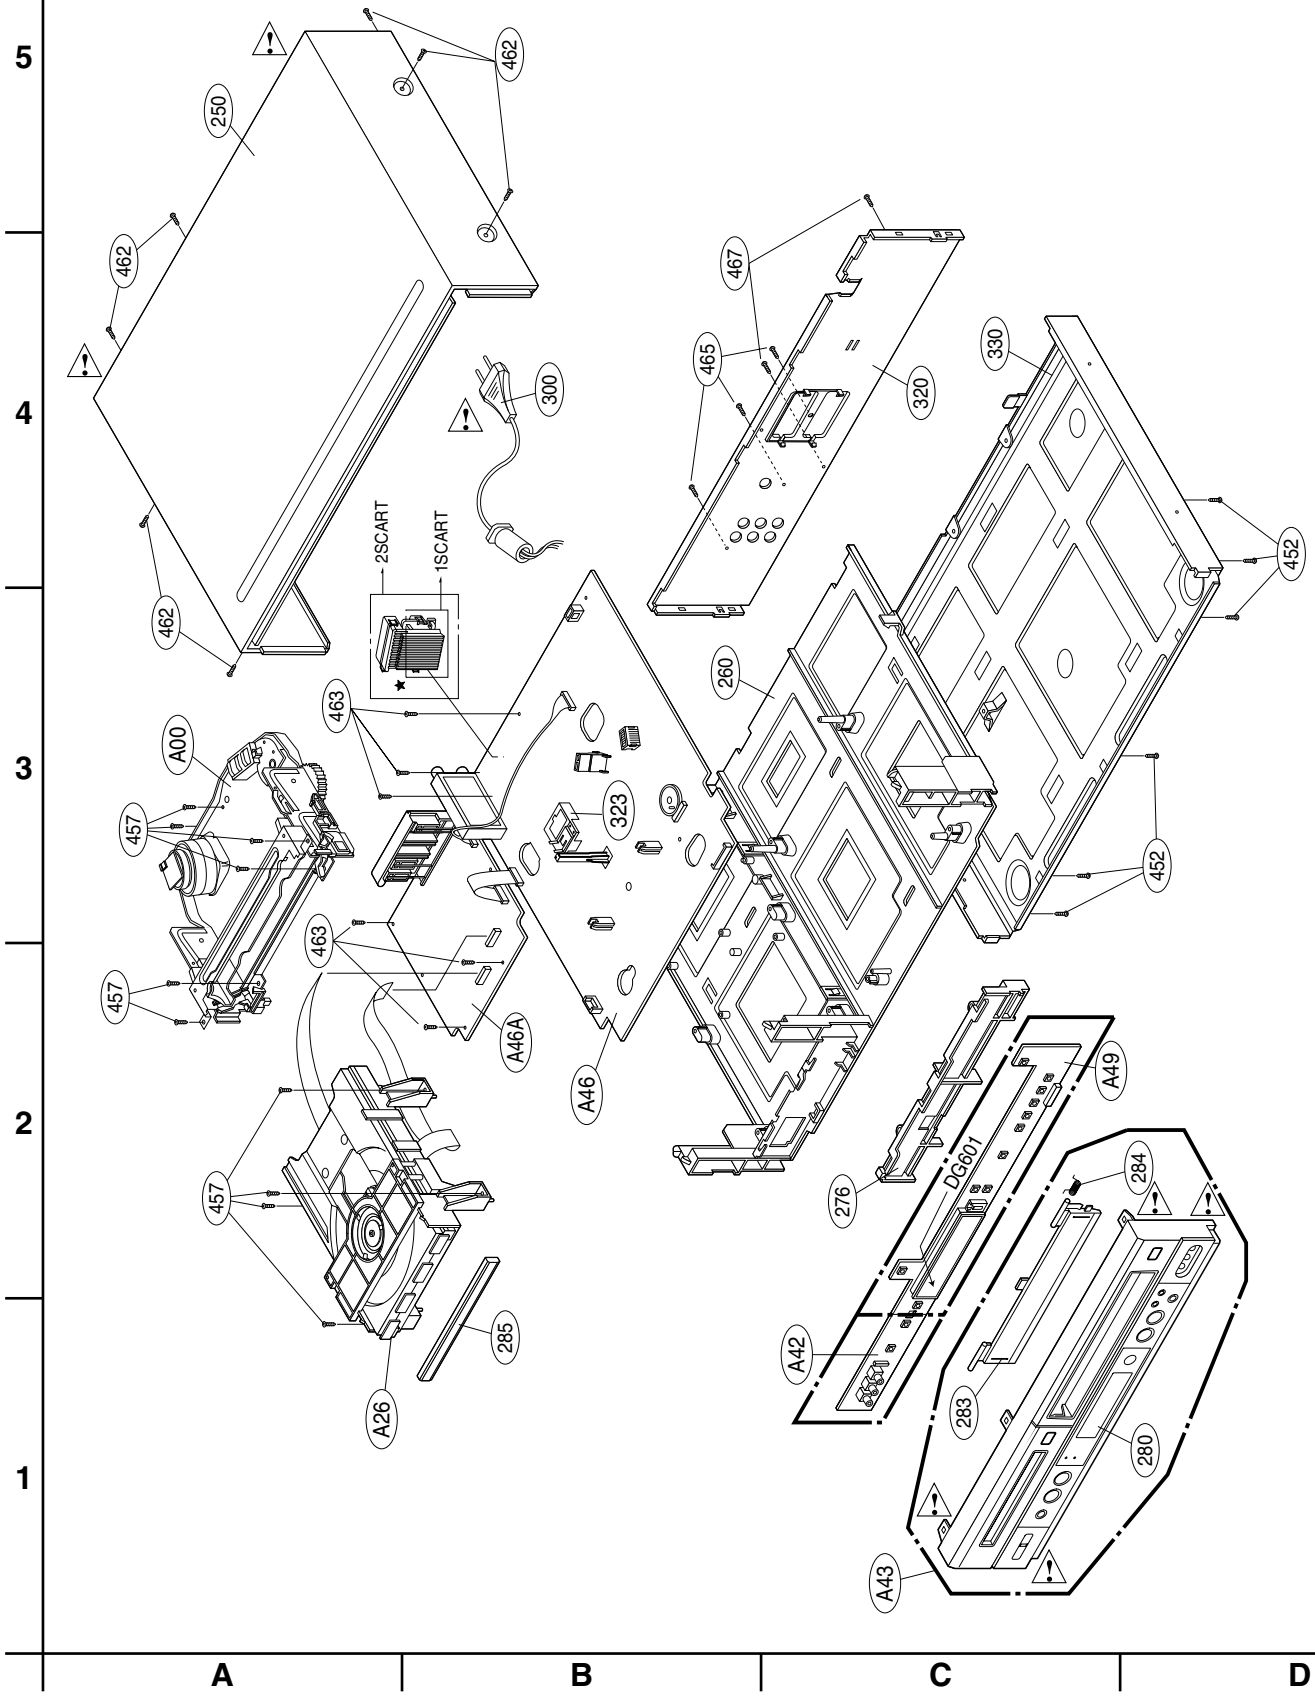

2.Packing Accessory Section

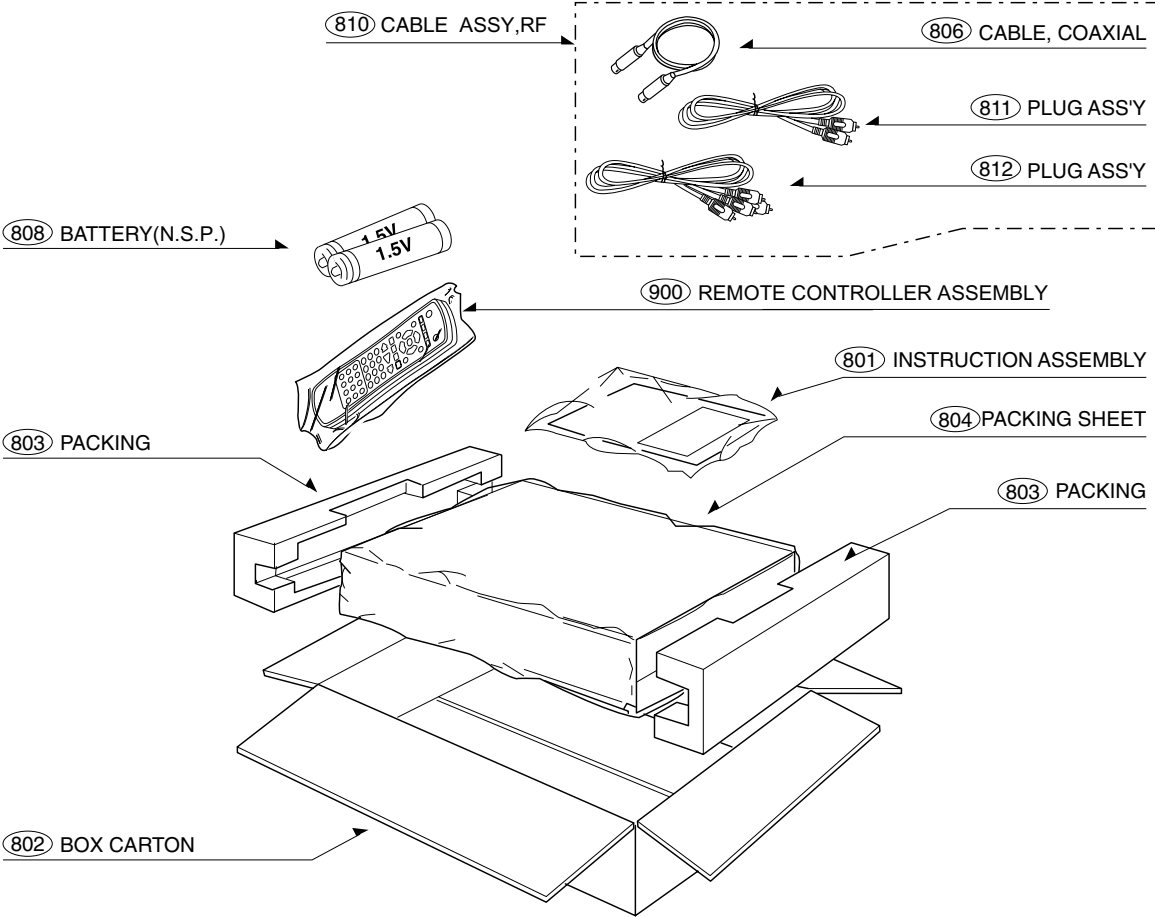


SECTION 3

ELECTRICAL

CONTENTS

OVERALL BLOCK DIAGRAM	3-1
VCR PART	
ELECTRICAL ADJUSTMENT PROCEDURES	3-2
ELECTRICAL TROUBLESHOOTING GUIDE	3-3
1. POWER(SMPS) CIRCUIT	3-3
2. SYSTEM/KEY CIRCUIT	3-7
3. SERVO CIRCUIT	3-8
4. Y/C CIRCUIT	3-11
5. Hi-Fi CIRCUIT	3-15
6. Tuner/IF CIRCUIT	3-18
BLOCK DIAGRAMS	3-20
1. Power (SMPS) BLOCK DIAGRAM	3-20
2. TU/IF, NICAM & A2 BLOCK DIAGRAM	3-22
3. VPS BLOCK DIAGRAM	3-23
4. Y/C BLOCK DIAGRAM	3-24
5. Hi-Fi BLOCK DIAGRAM	3-26
6. SYSTEM BLOCK DIAGRAM	3-28
CIRCUIT DIAGRAMS	3-30
1. Power (SMPS) CIRCUIT DIAGRAM	3-30
2. TU/IF, NICAM & A2 CIRCUIT DIAGRAM	3-32
3. A/V CIRCUIT DIAGRAM	3-34
4. Hi-Fi CIRCUIT DIAGRAM	3-36
5. SCART(JACK) CIRCUIT DIAGRAM	3-38
6. SYSTEM CIRCUIT DIAGRAM	3-40
• WAVEFORMS	3-42
• CIRCUIT VOLTAGE CHART	3-44
PRINTED CIRCUIT DIAGRAMS	3-48
1. MAIN P.C.BOARD	3-48
2. KEY P.C.BOARD	3-50
3. CLOCK P.C.BOARD	3-50
DVD PART	
ELECTRICAL TROUBLESHOOTING GUIDE	3-52
1. μ -COM CIRCUIT	3-52
2. MPEG CIRCUIT	3-55
3. RF/Servo CIRCUIT	3-56
BLOCK DIAGRAMS	3-60
1. DVD Overall BLOCK DIAGRAM	3-60
2. RF/CD DSP/DVD DSP/DVD SERVO BLOCK DIAGRAM	3-61
3. Audio BLOCK DIAGRAM	3-62
4. MPEG BLOCK DIAGRAM	3-63
CIRCUIT DIAGRAMS	3-64
1. DVD DSP CIRCUIT DIAGRAM	3-64
2. DRIVE & RF CIRCUIT DIAGRAM	3-66
3. MPEG CIRCUIT DIAGRAM	3-68
4. Audio DM CIRCUIT DIAGRAM	3-70
5. MEMORY CIRCUIT DIAGRAM	3-72
6. SCART(JACK) CIRCUIT DIAGRAM	3-74
• WAVEFORMS	3-76
• CIRCUIT VOLTAGE CHART	3-78
PRINTED CIRCUIT DIAGRAMS	3-82
1. MAIN P.C.BOARD (TOP VIEW)	3-83
1. MAIN P.C.BOARD (BOTTOM VIEW)	3-84

OVERALL WIRING DIAGRAM

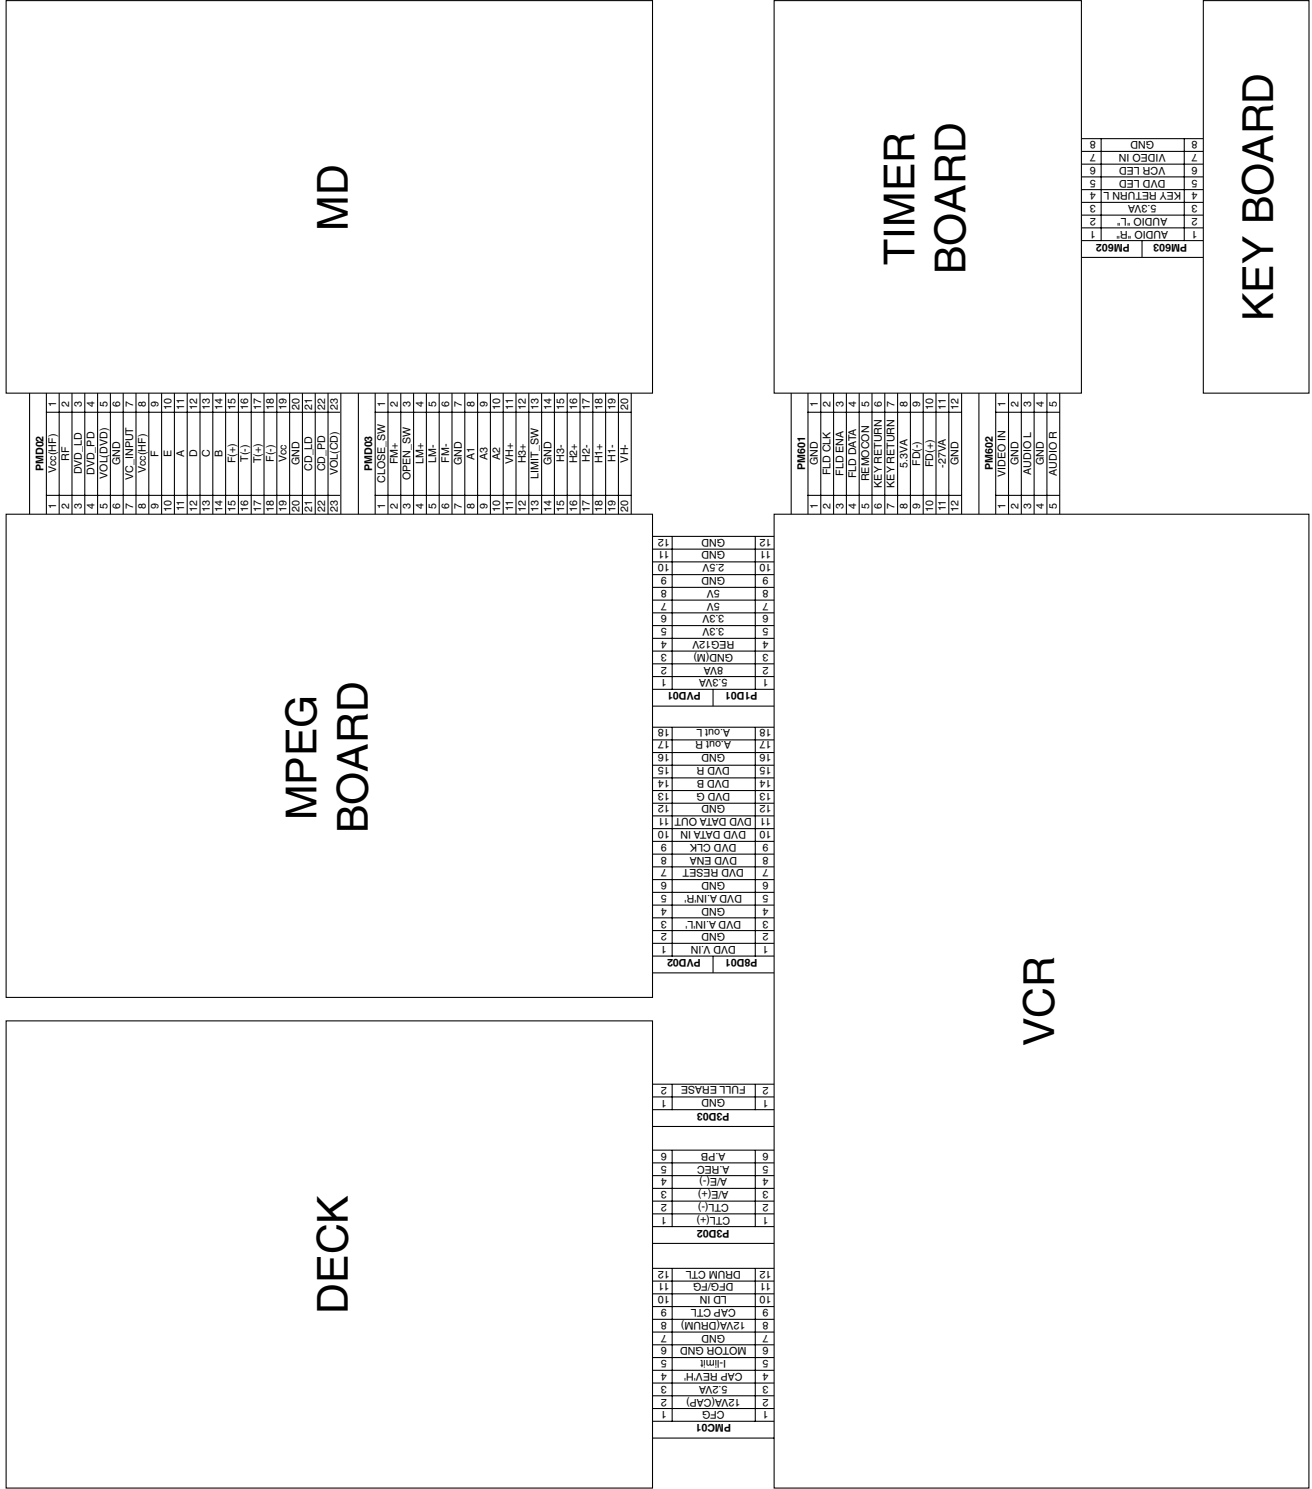

VCR PART

ELECTRICAL ADJUSTMENT PROCEDURES

1. Servo Adjustment

- 1) PG Adjustment
 - Test Equipment

a) OSCILLOSCOPE	C) PAL MODEL : PAL SP TEST TAPE
b) NTSC MODEL : NTSC SP TEST TAPE	

• Adjustment And Specification

MODE	MEASUREMENT POINT	ADJUSTMENT POINT	SPECIFICATION
PLAY	V.Out H/SW(W373, W374)	R/C TRK JIG KEY	$6.5 \pm 0.5H$


• **Adjustment Procedure**

- a) Insert the SP Test Tape and play.
 Note - Adjust the distance of X, pressing the Tracking(+) or Tracking(-) when the "ATR" is blink after the SP Test Tape is inserted.
- b) Connect the CH1 of the oscilloscope to the H/SW(W373, W374) and CH2 to the Video Out for the VCR.
- c) Trigger the mixed Combo Video Signal of CH2 to the CH1 H/SW(W373, W374), and then check the distance (time difference), which is from the selected A(B) Head point of the H/SW(W373, W374) signal to the starting point of the vertical synchronized signal, to $6.5H \pm 0.5H$ ($412\mu s$, $1H=63\mu s$).


• **PG Adjustment Method**

- a-1) Playback the SP standard tape
- b-2) Press the "1" key on the Remote controller and the "PLAY" key on the Front Panel the same time, then it goes in to Tracking initial mode. (Note: NTSC Model : "1" key and PAL Model "0" key on Remote controller)
- c-3) Repeat the above step(No.b-2), then it finishes the PG adjusting automatically.
- d-4) Stop the playback, then it goes out to PG adjusting mode after many the PG data.

• **CONNECTION**

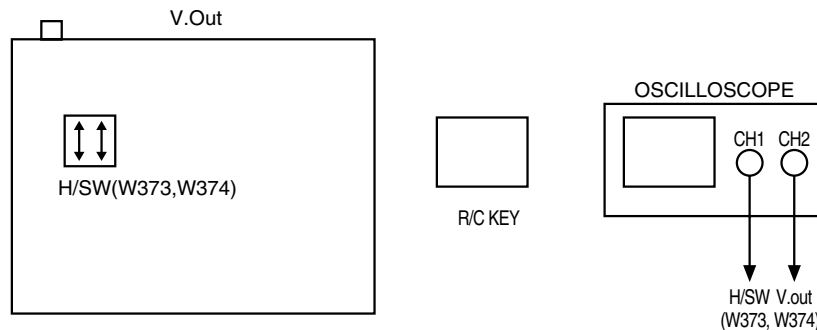


• **WAVEFORM**

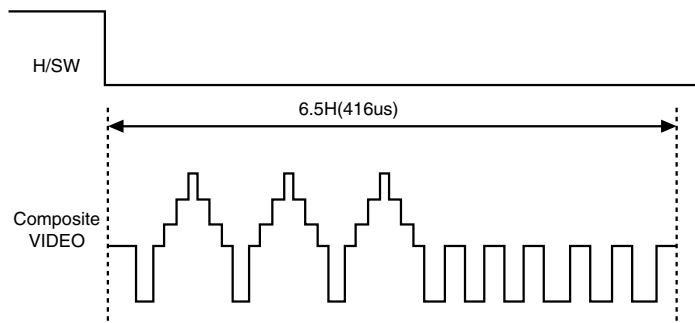


ELECTRICAL TROUBLESHOOTING GUIDE

1. Power(SMPS) CIRCUIT


(1) No 5.3VA (SYS/Hi-Fi/TUNER)

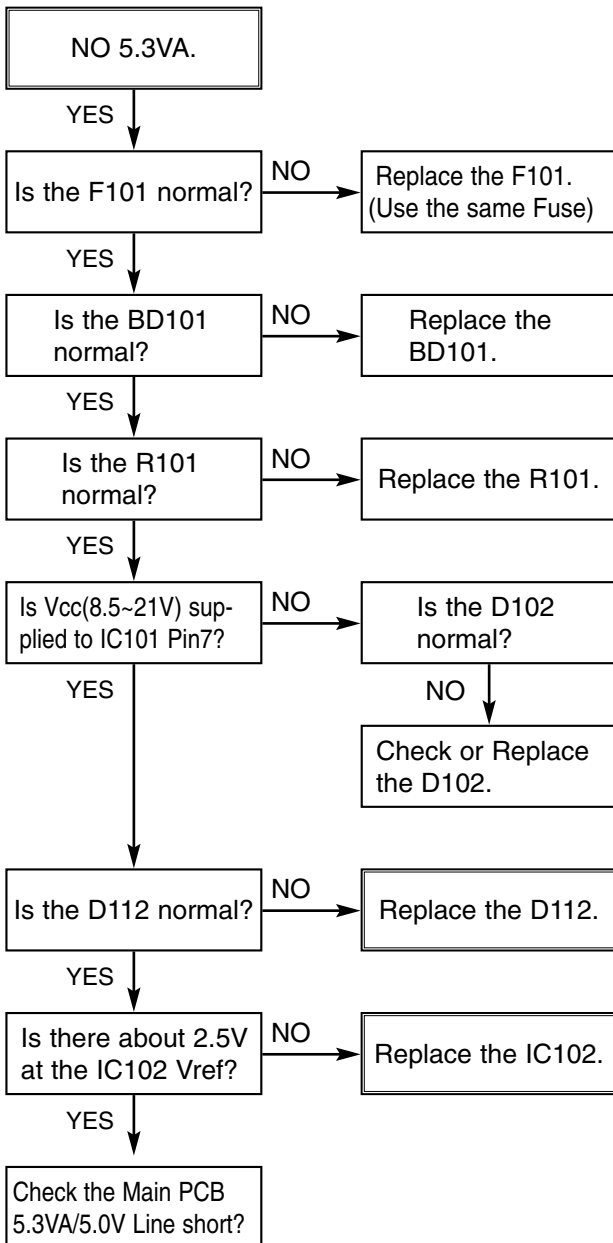


(2) No 12VA (TO CAP, DRUM MOTOR)

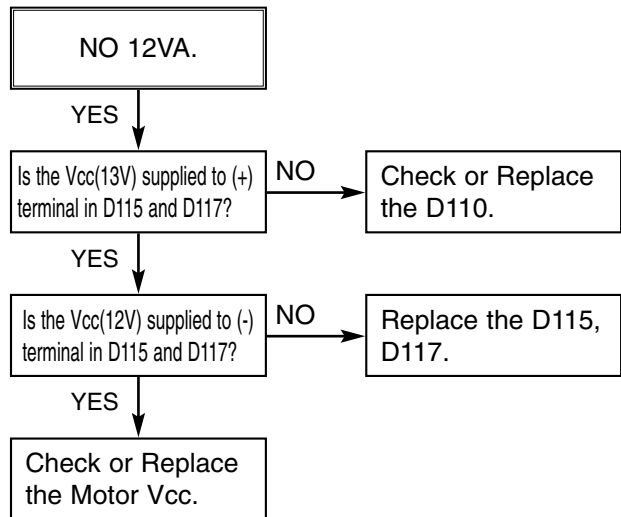


(3) No 5.2V (SYS/Hi-Fi/TUNER)

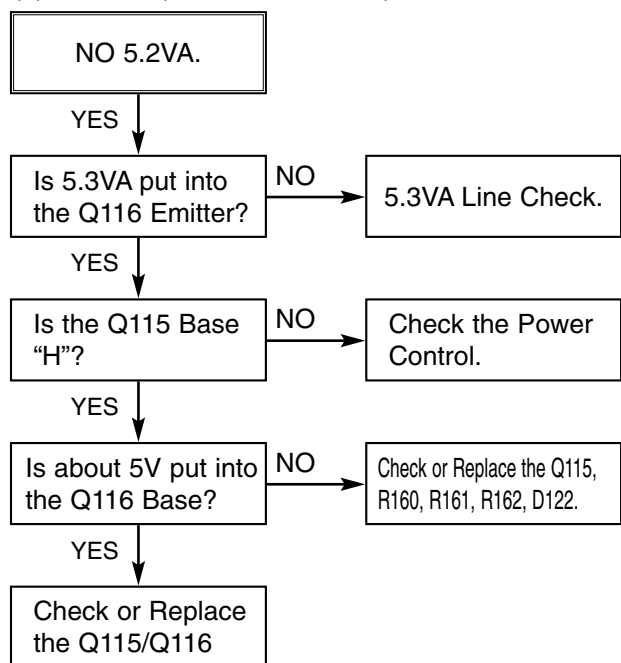


(4) No 5V (TO DVD)

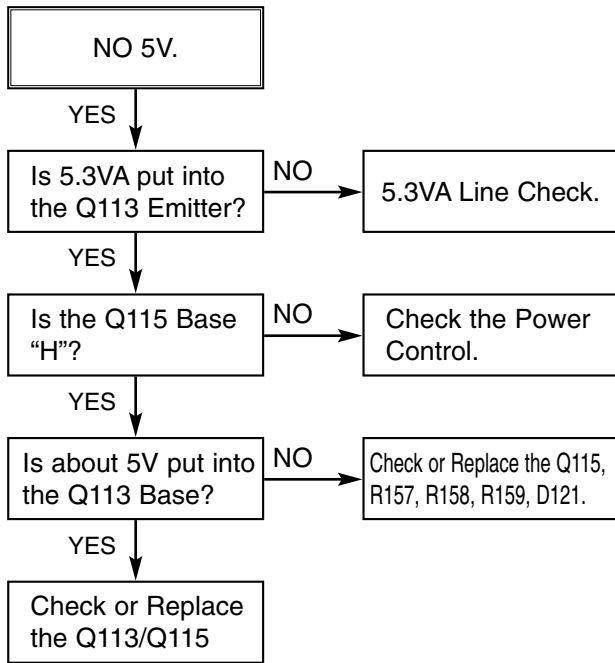


(5) No REG 5VT (SYS/AVCP/TU/CANAL)

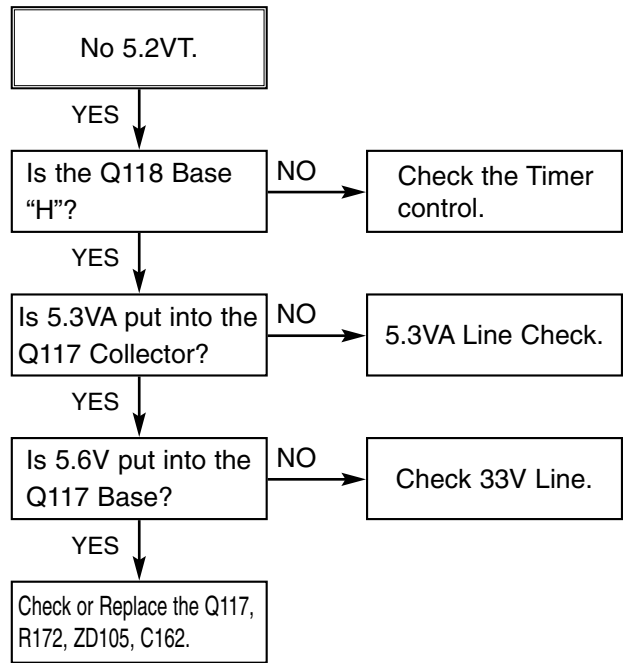


(6) No 33VT (TUNER)

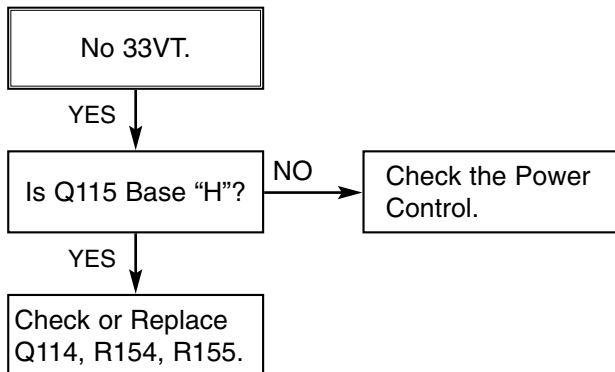


(7) No REG 12VT

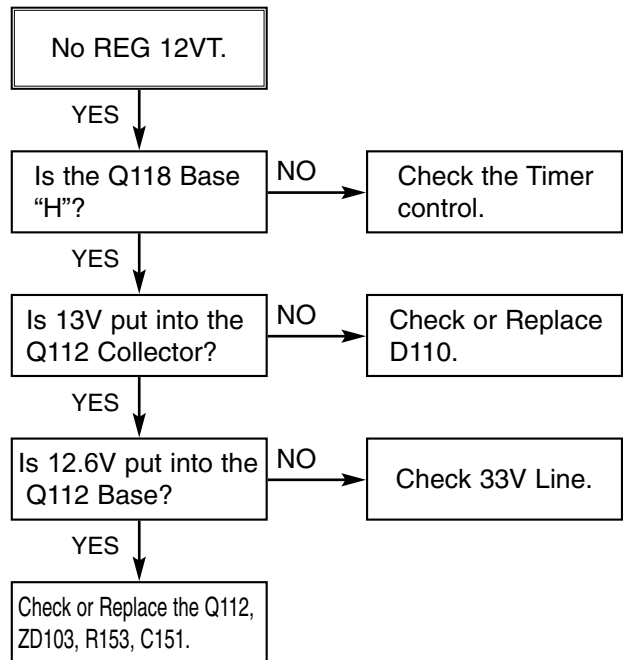


(8) No -27VA

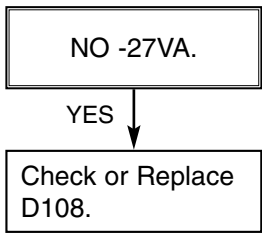


(9) No 8VA

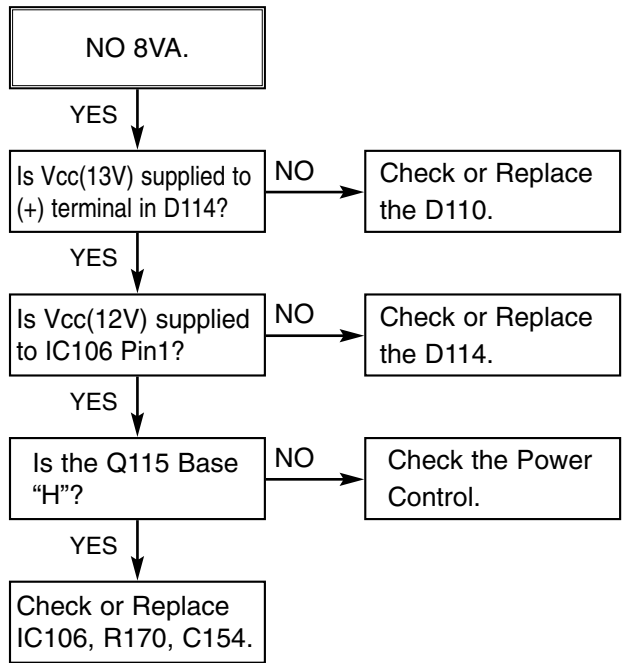

(10) No 3.3V

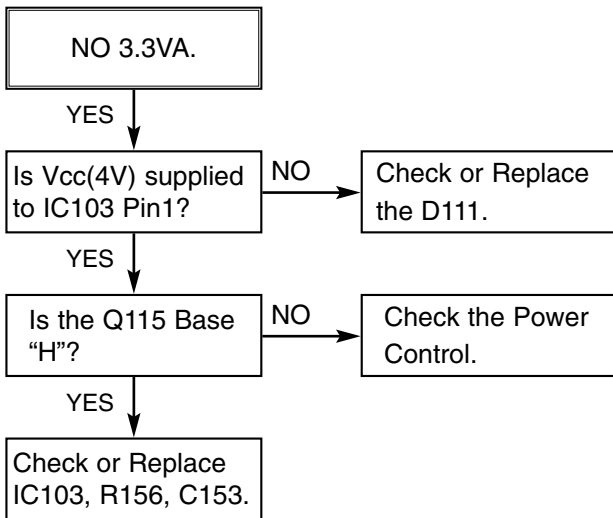


(11) No 2.5V

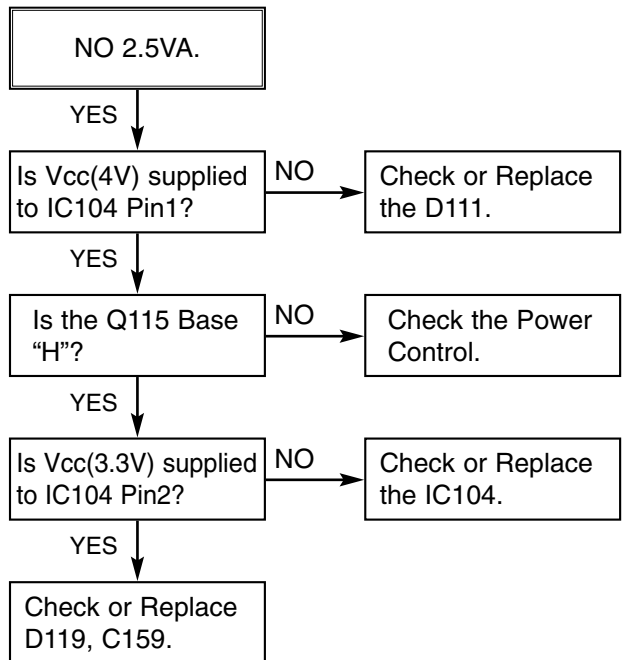


2. SYSTEM/KEY CIRCUIT

(1) AUTO STOP

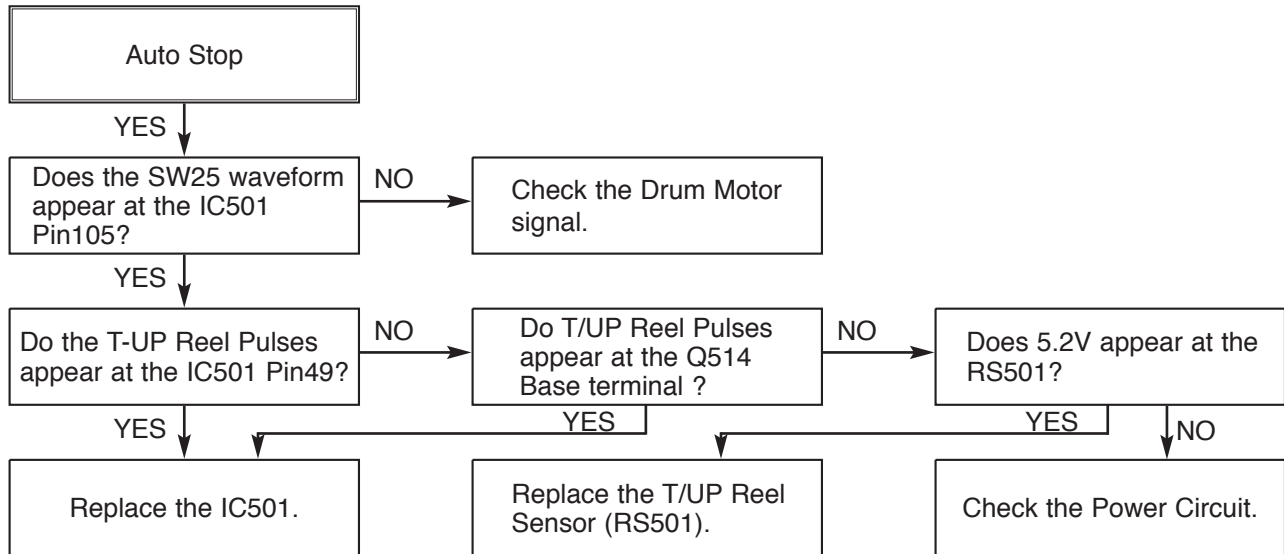


Caution : Auto stop can occur because Grease or Oil is dried up

(2) The unstable loading of a Cassette tape

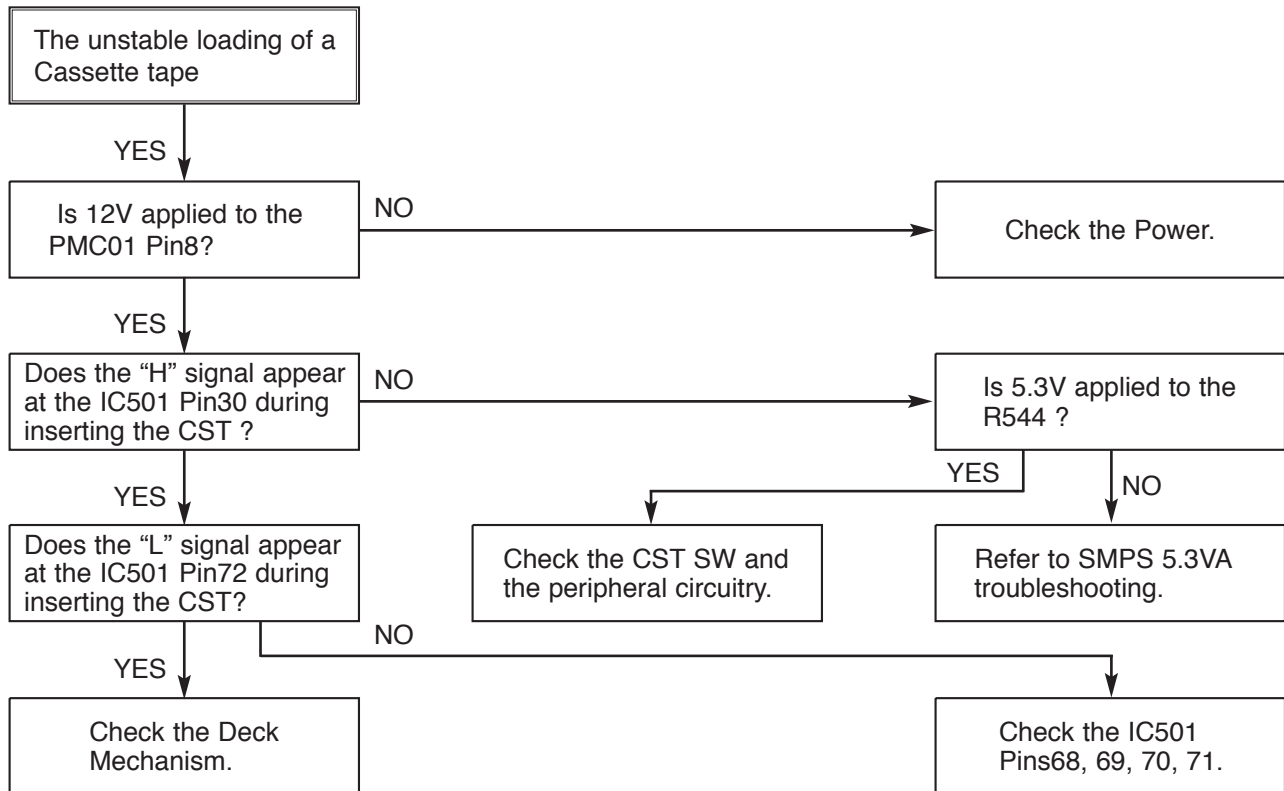


3. SERVO CIRCUIT


(1) Unstable Video in PB MODE

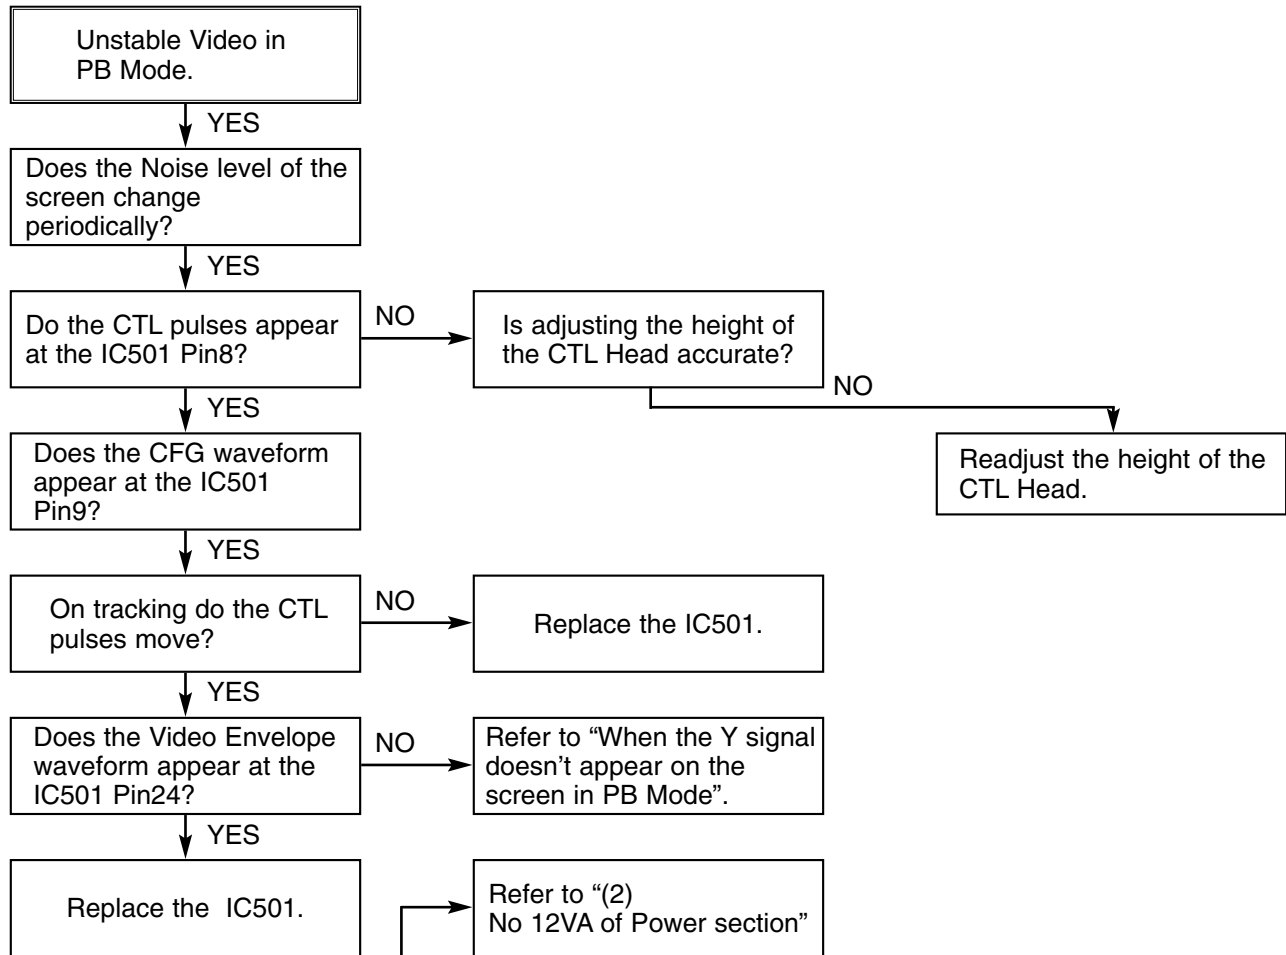


(2) When the Drum Motor doesn't run.

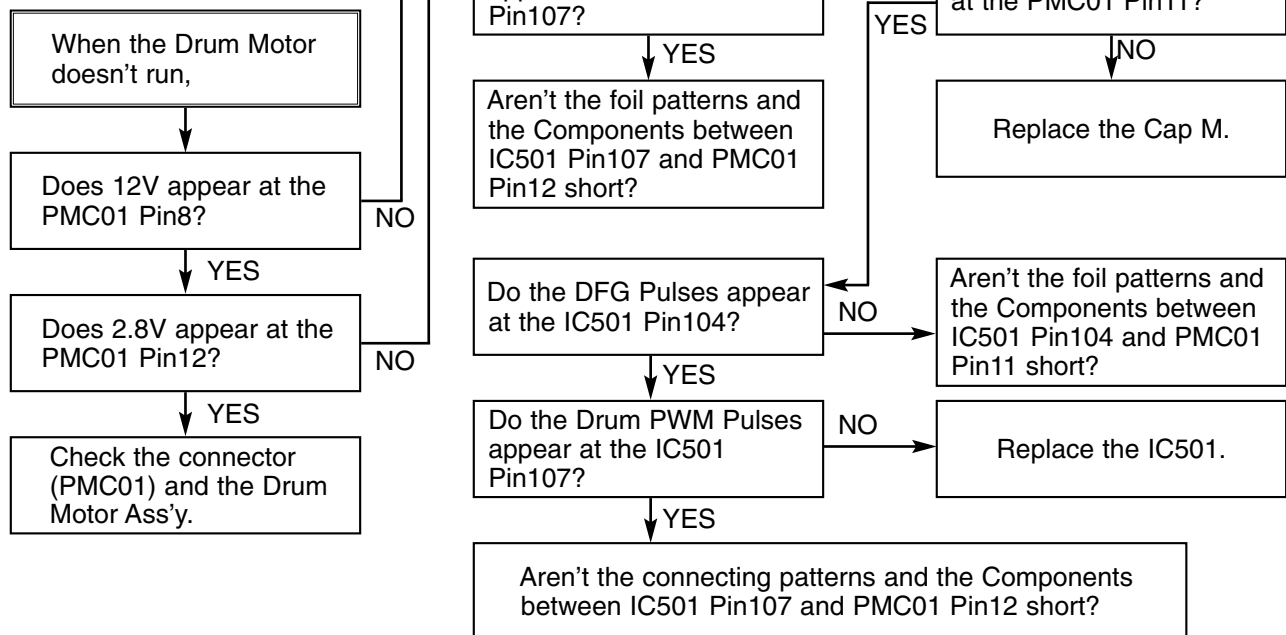

(3) When the Capstan Motor doesn't run,

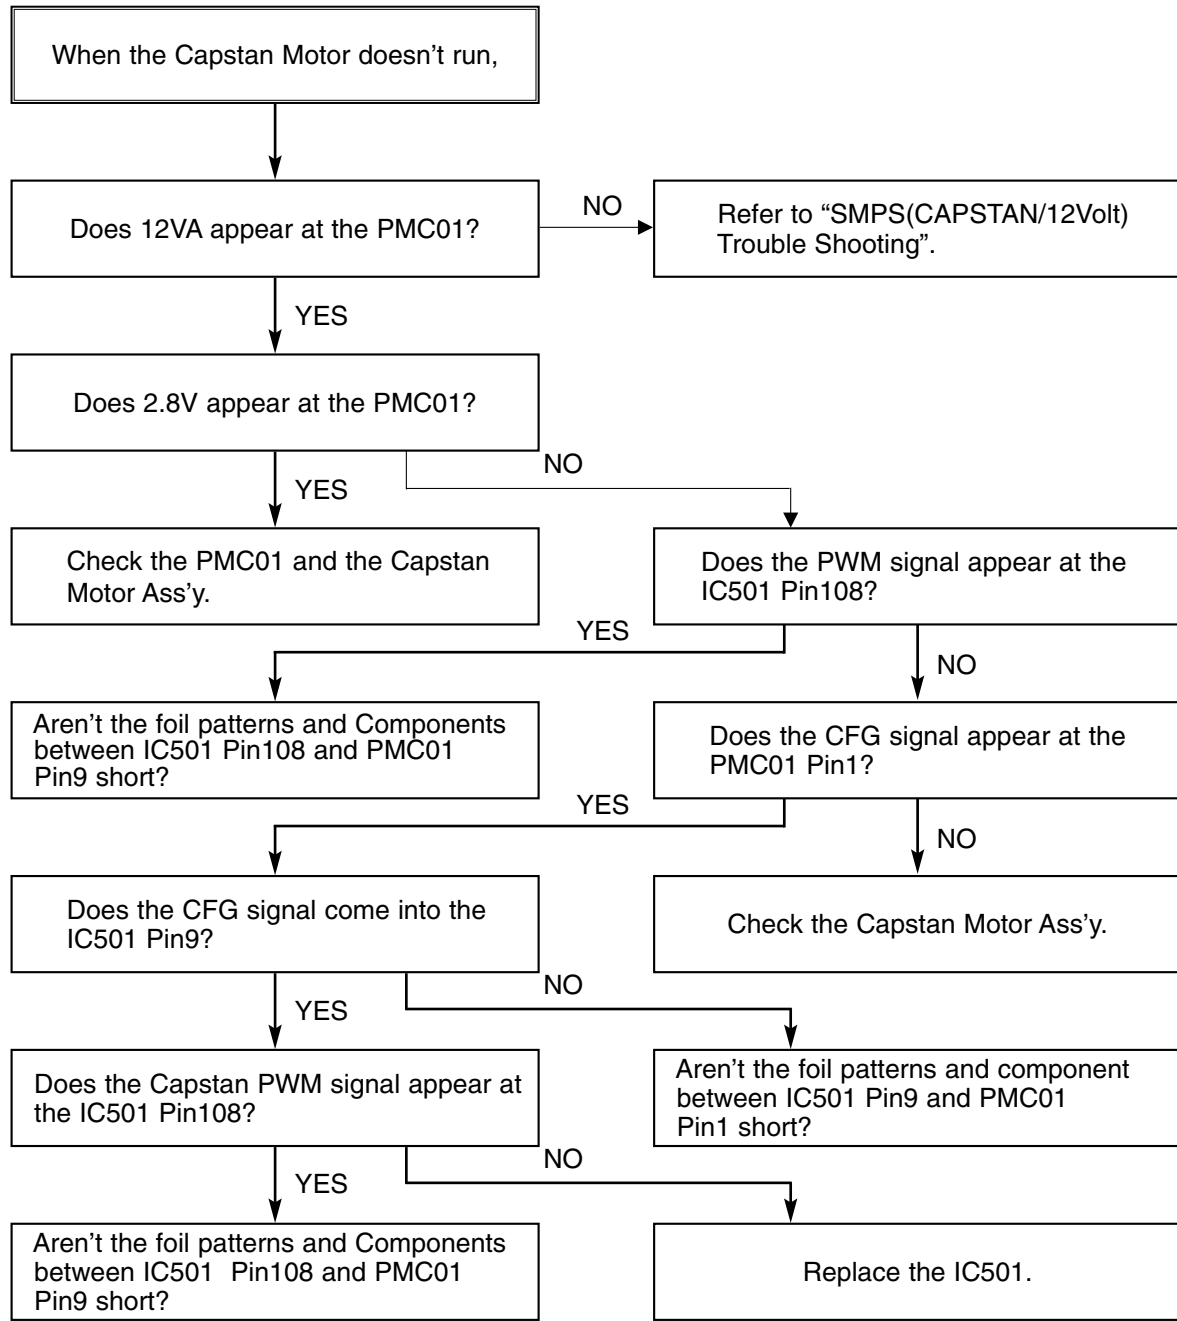


(4) KEY doesn't working

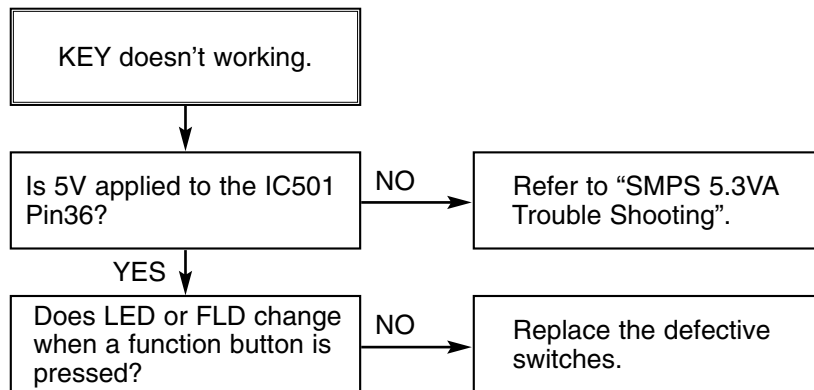


4. Y/C CIRCUIT


(1) No Video in EE Mode,

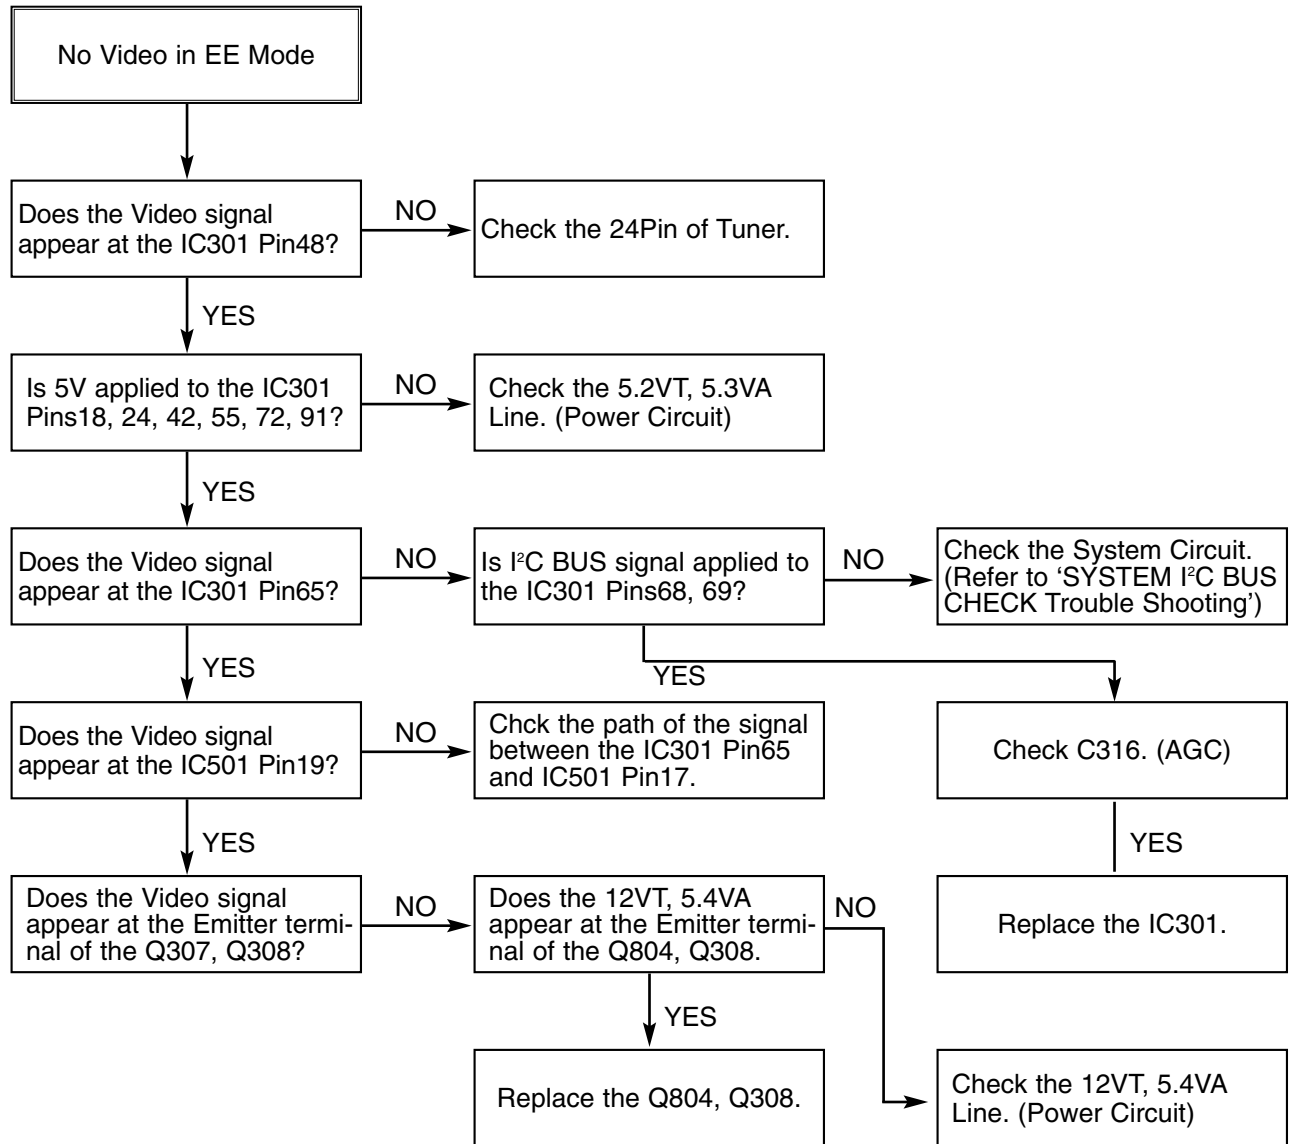


(2) When the Y(Luminance) signal doesn't appear on the screen in PB Mode,

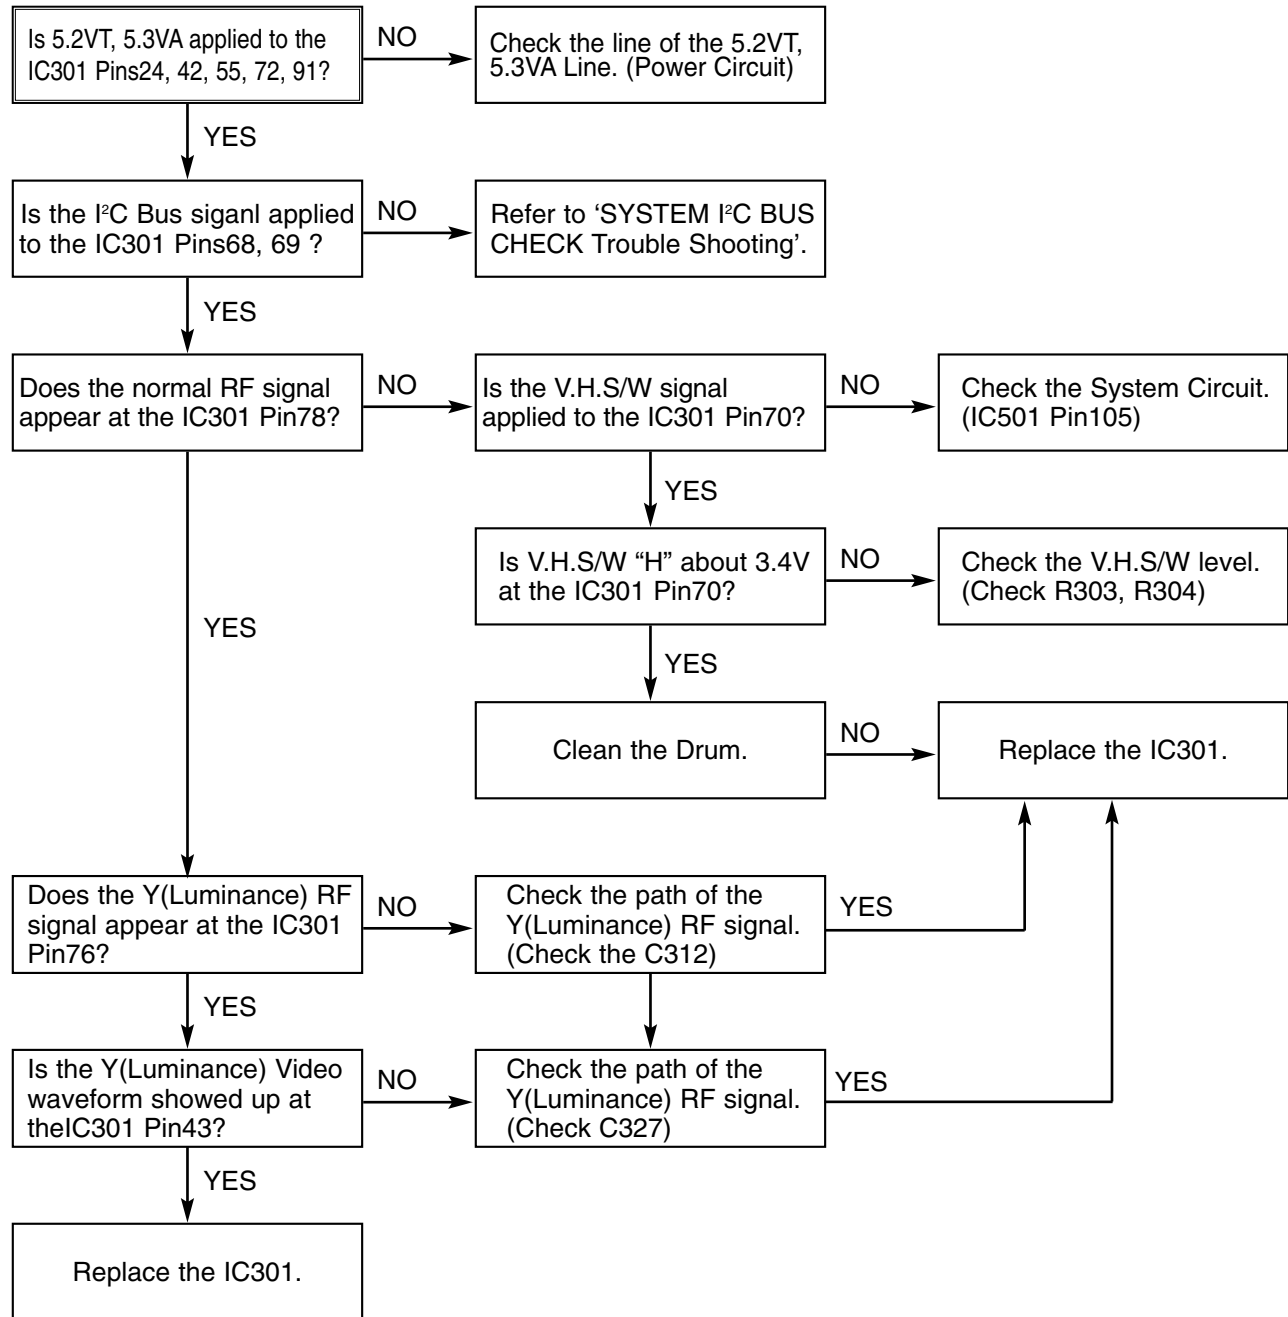

(3) When the C(Color) signal doesn't appear on the screen in PB Mode,

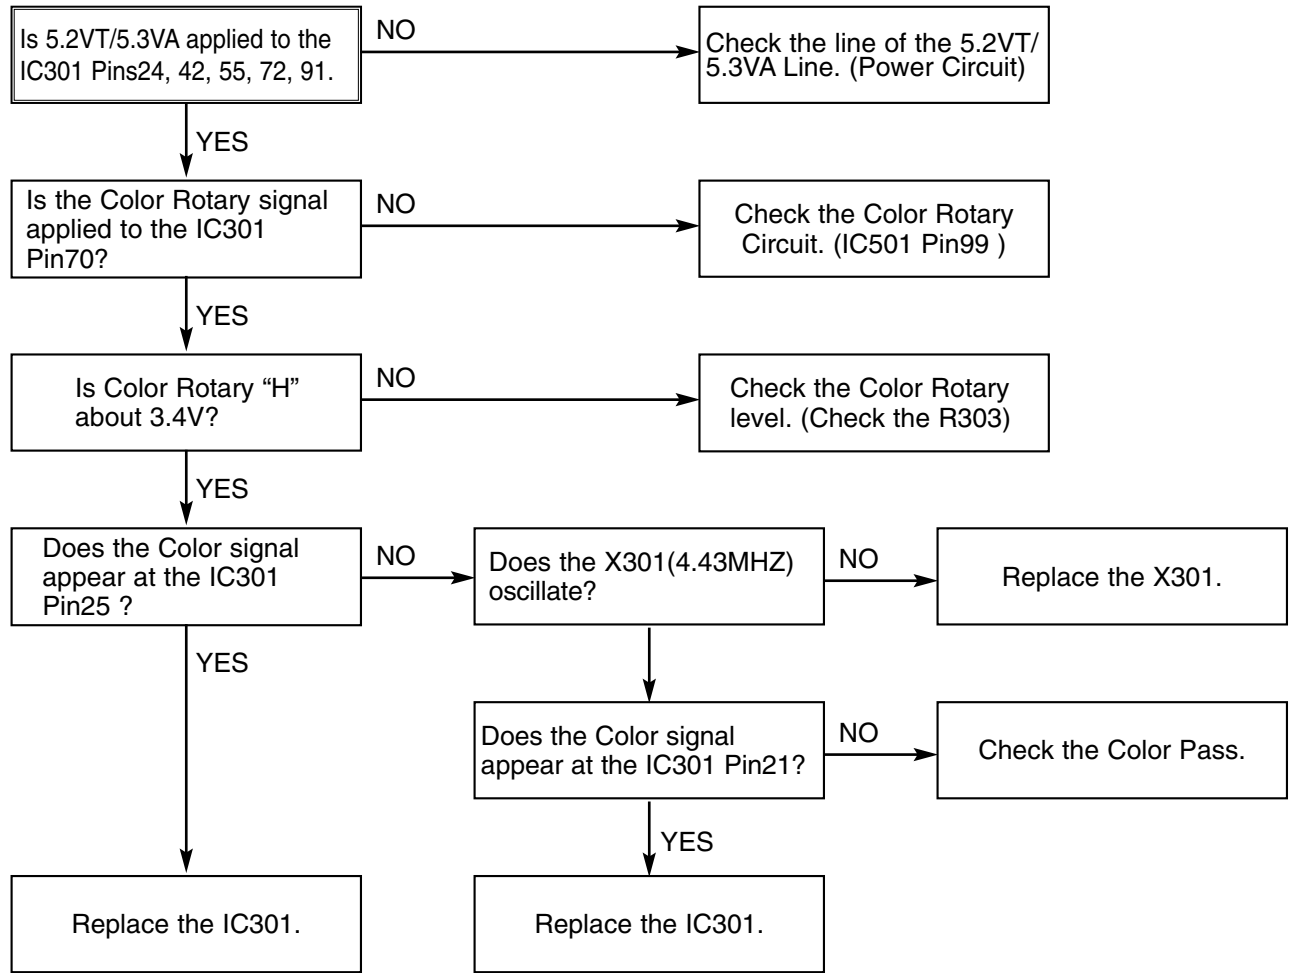


(4) When the Video signal doesn't appear on the screen in REC Mode,

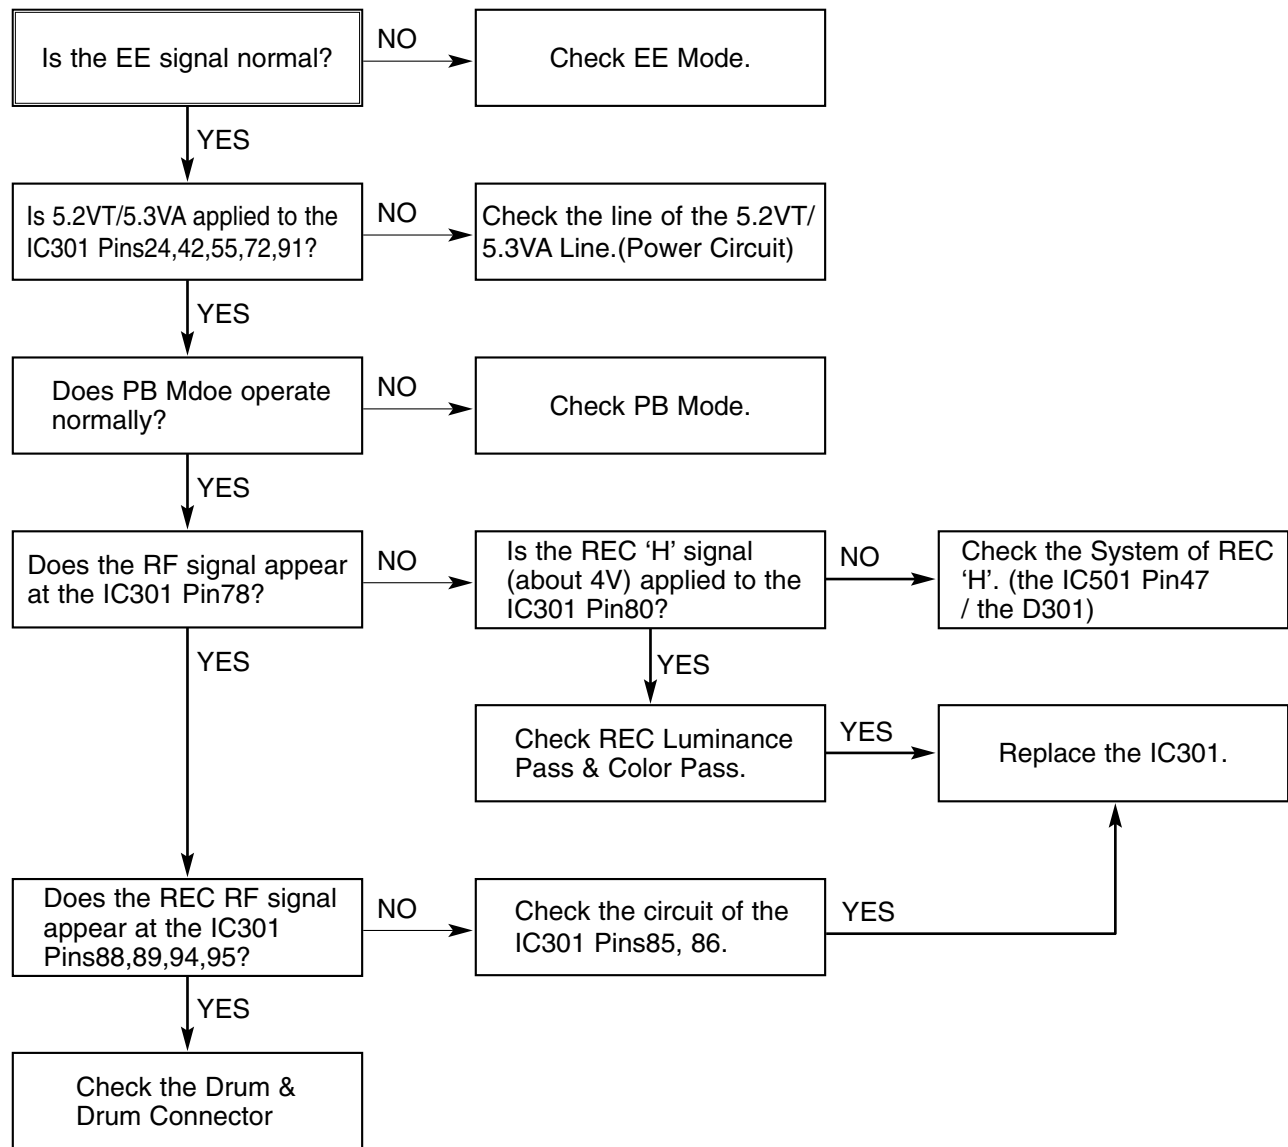


5. Hi-Fi CIRCUIT


(A) No Sound(EE Mode)

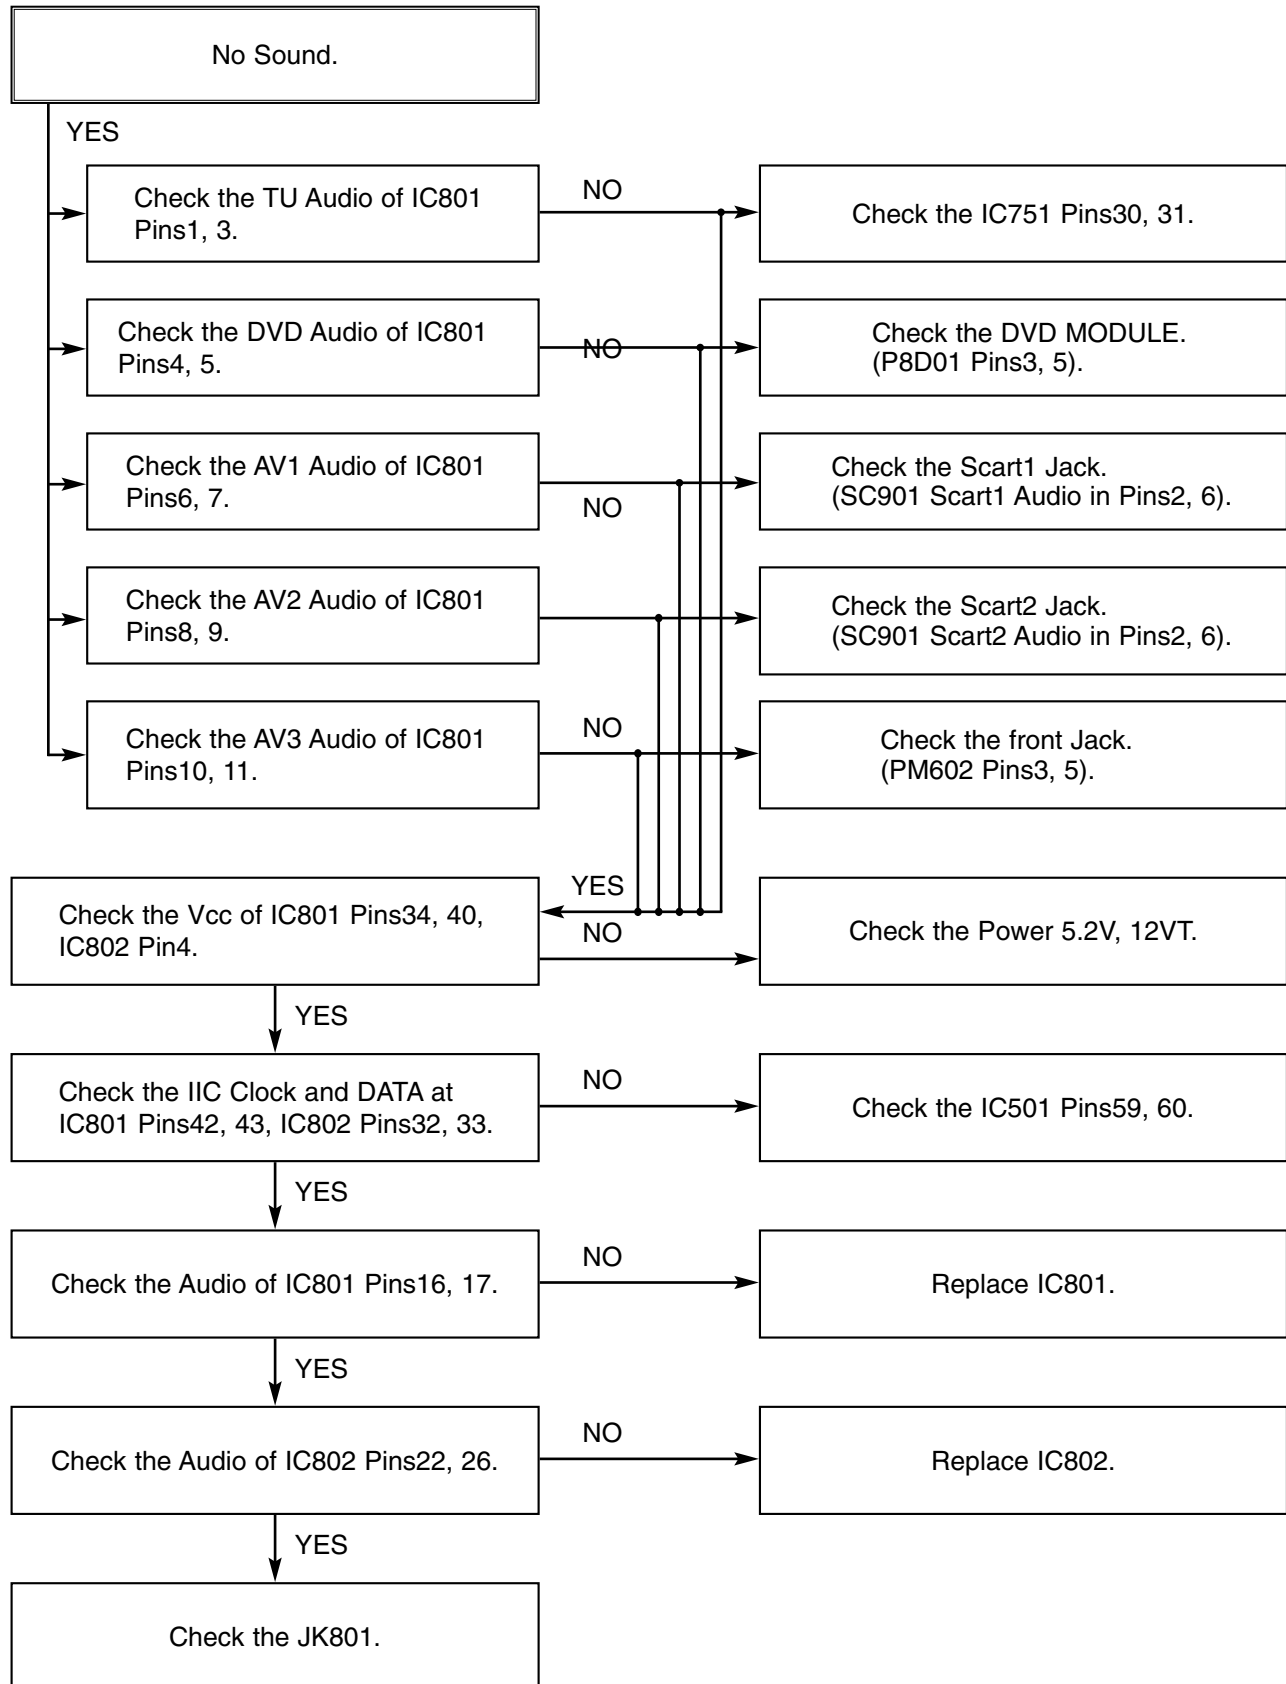

(B) Hi-Fi Playback

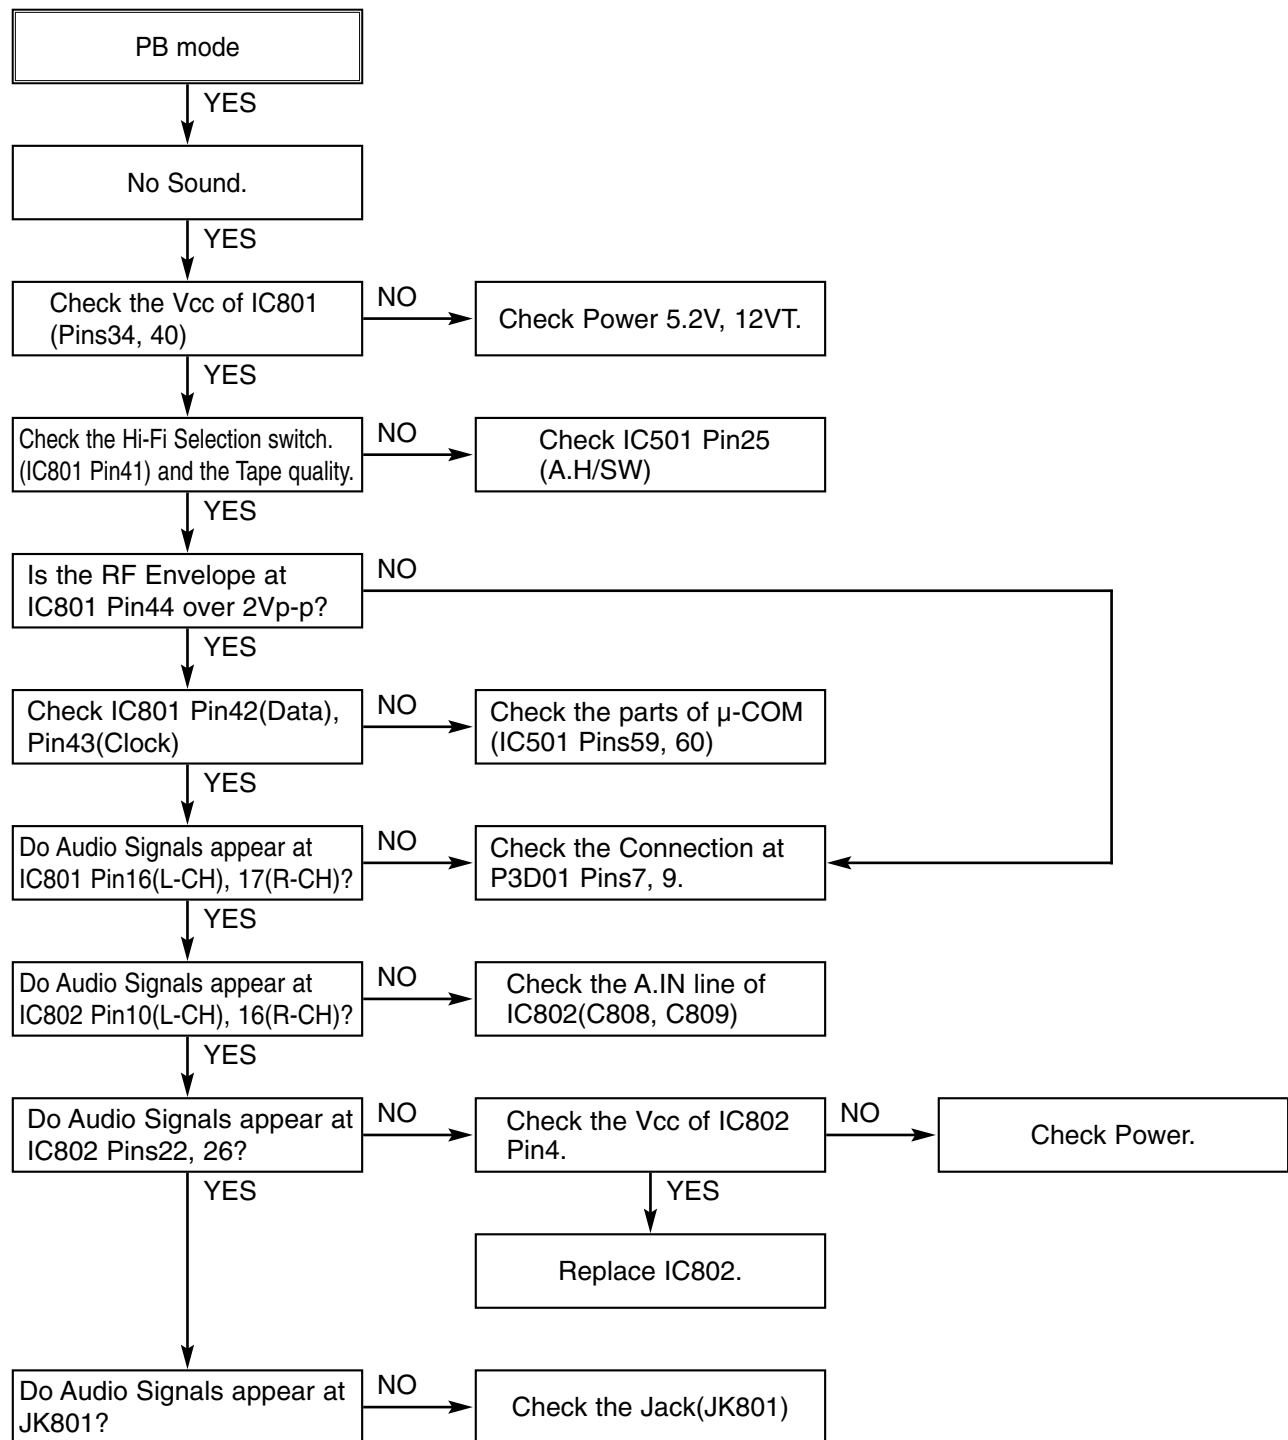


(C)

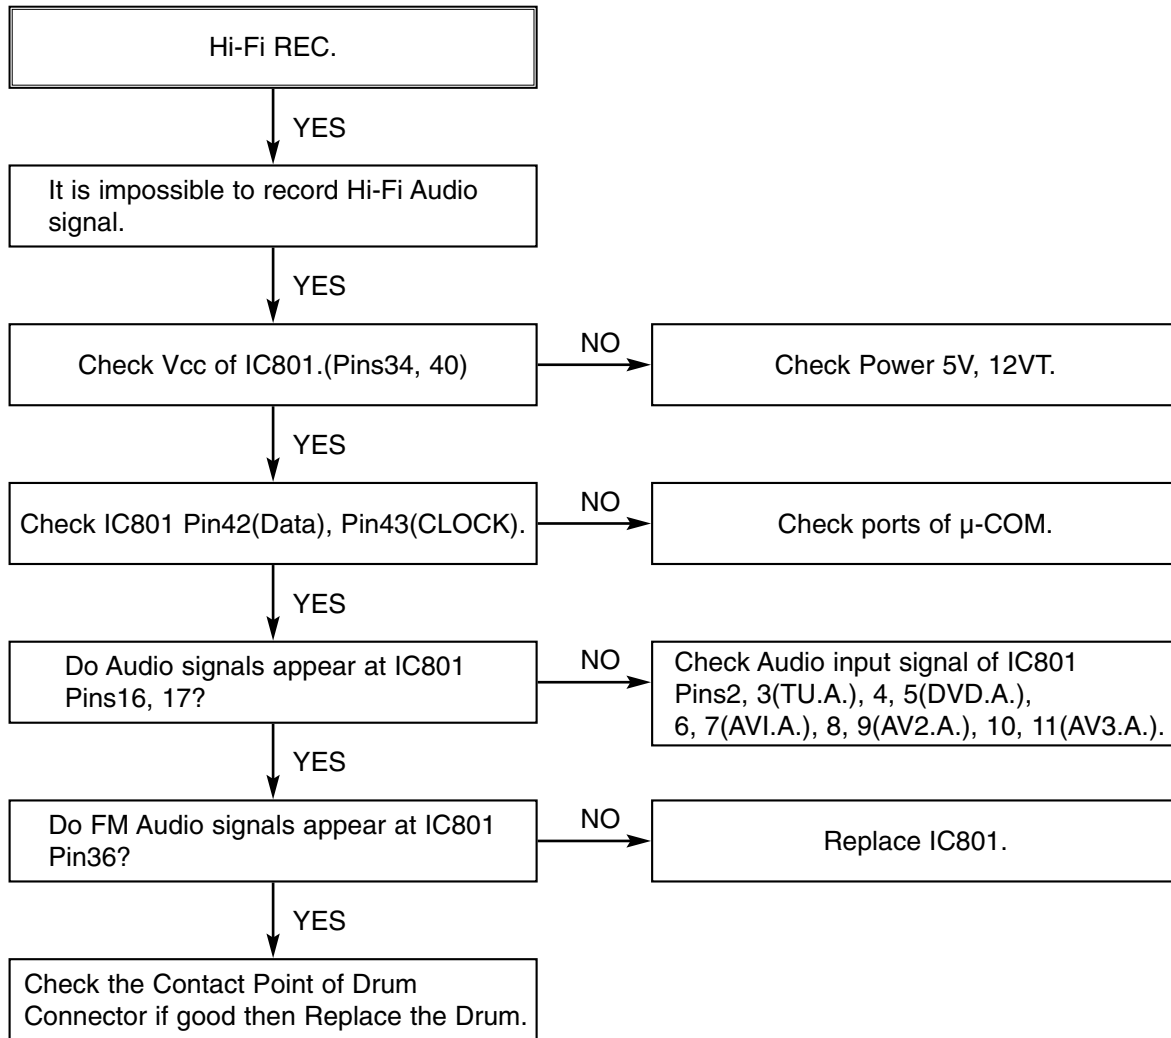


6. Tuner/IF CIRCUIT

(A) No Picture on the TV screen

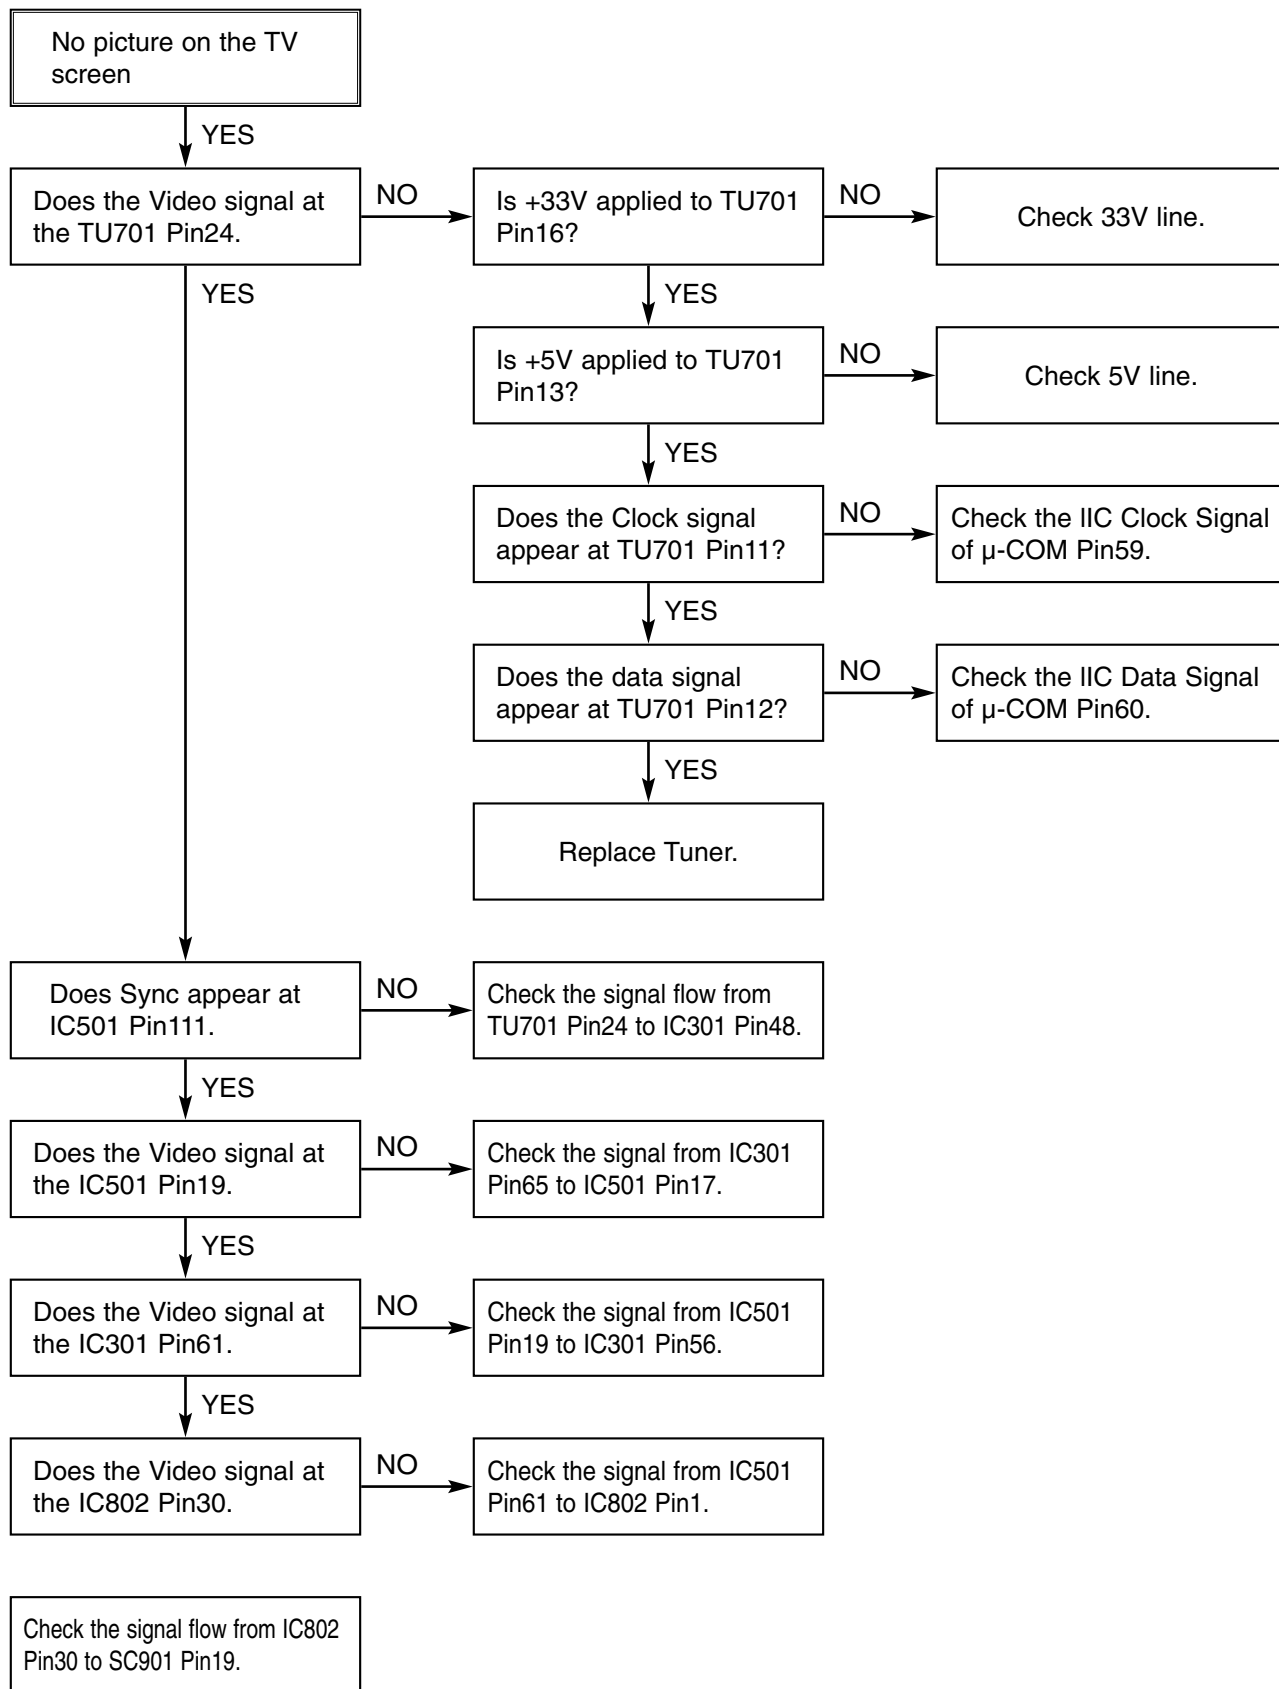


(B) No Sound

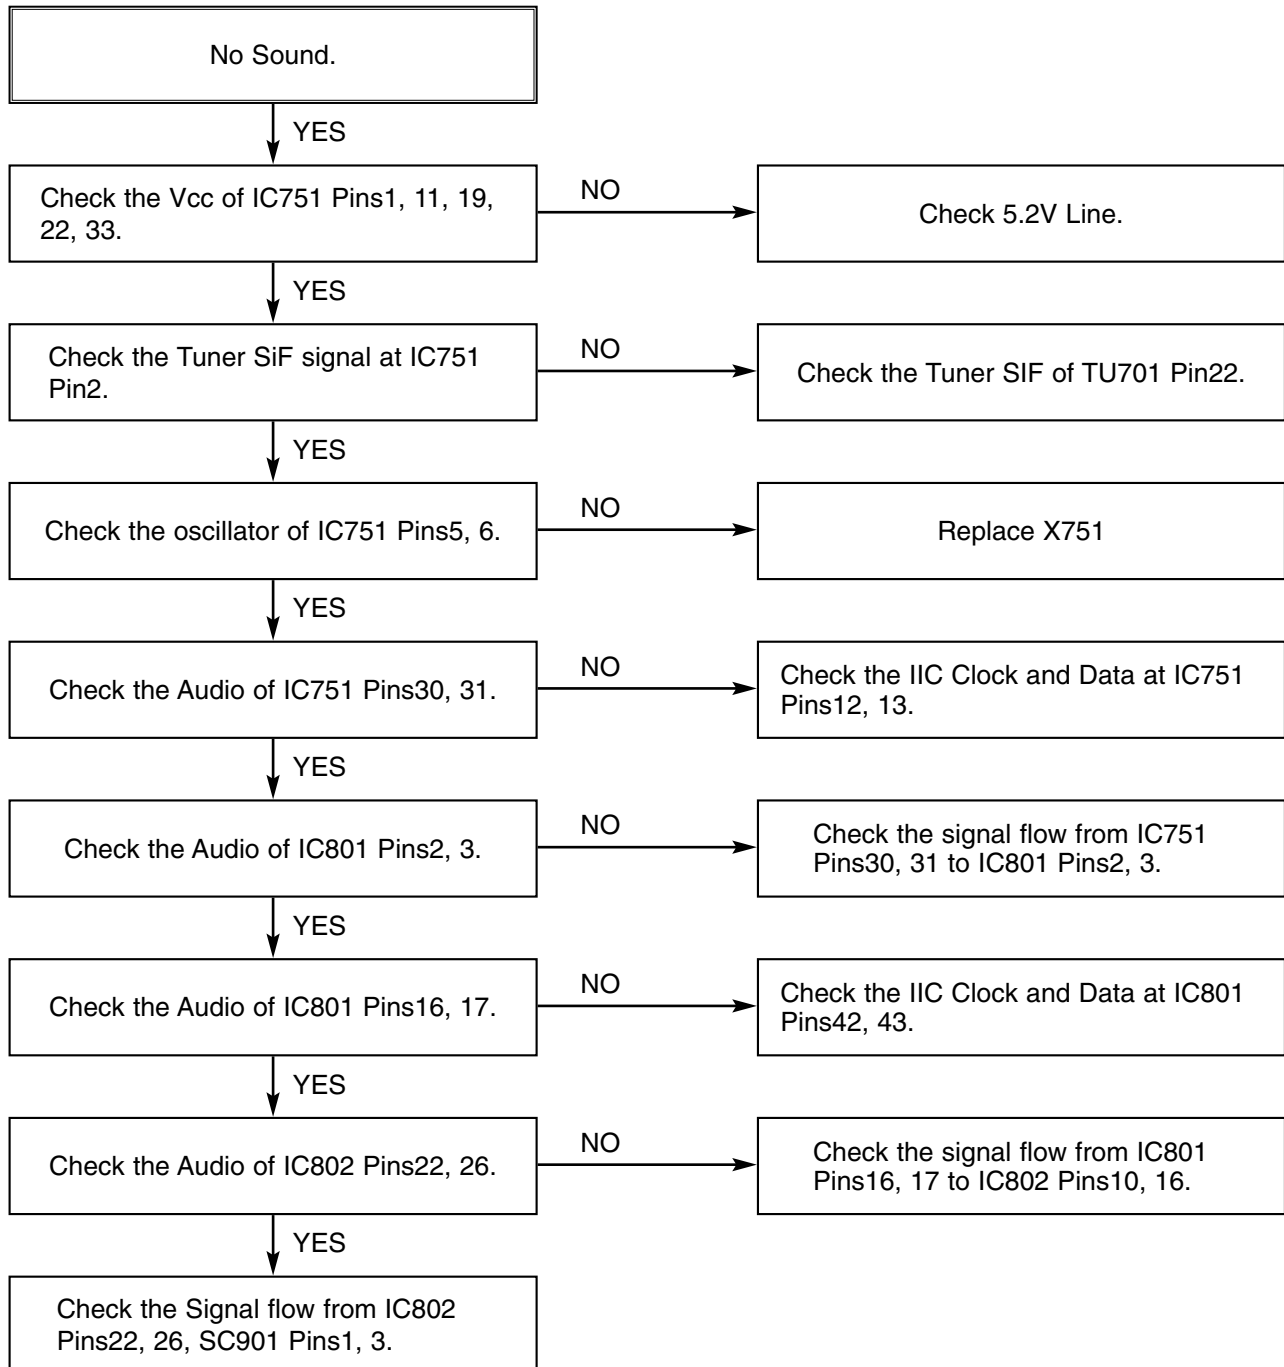


BLOCK DIAGRAMS


1. POWER(SMPS) BLOCK DIAGRAM

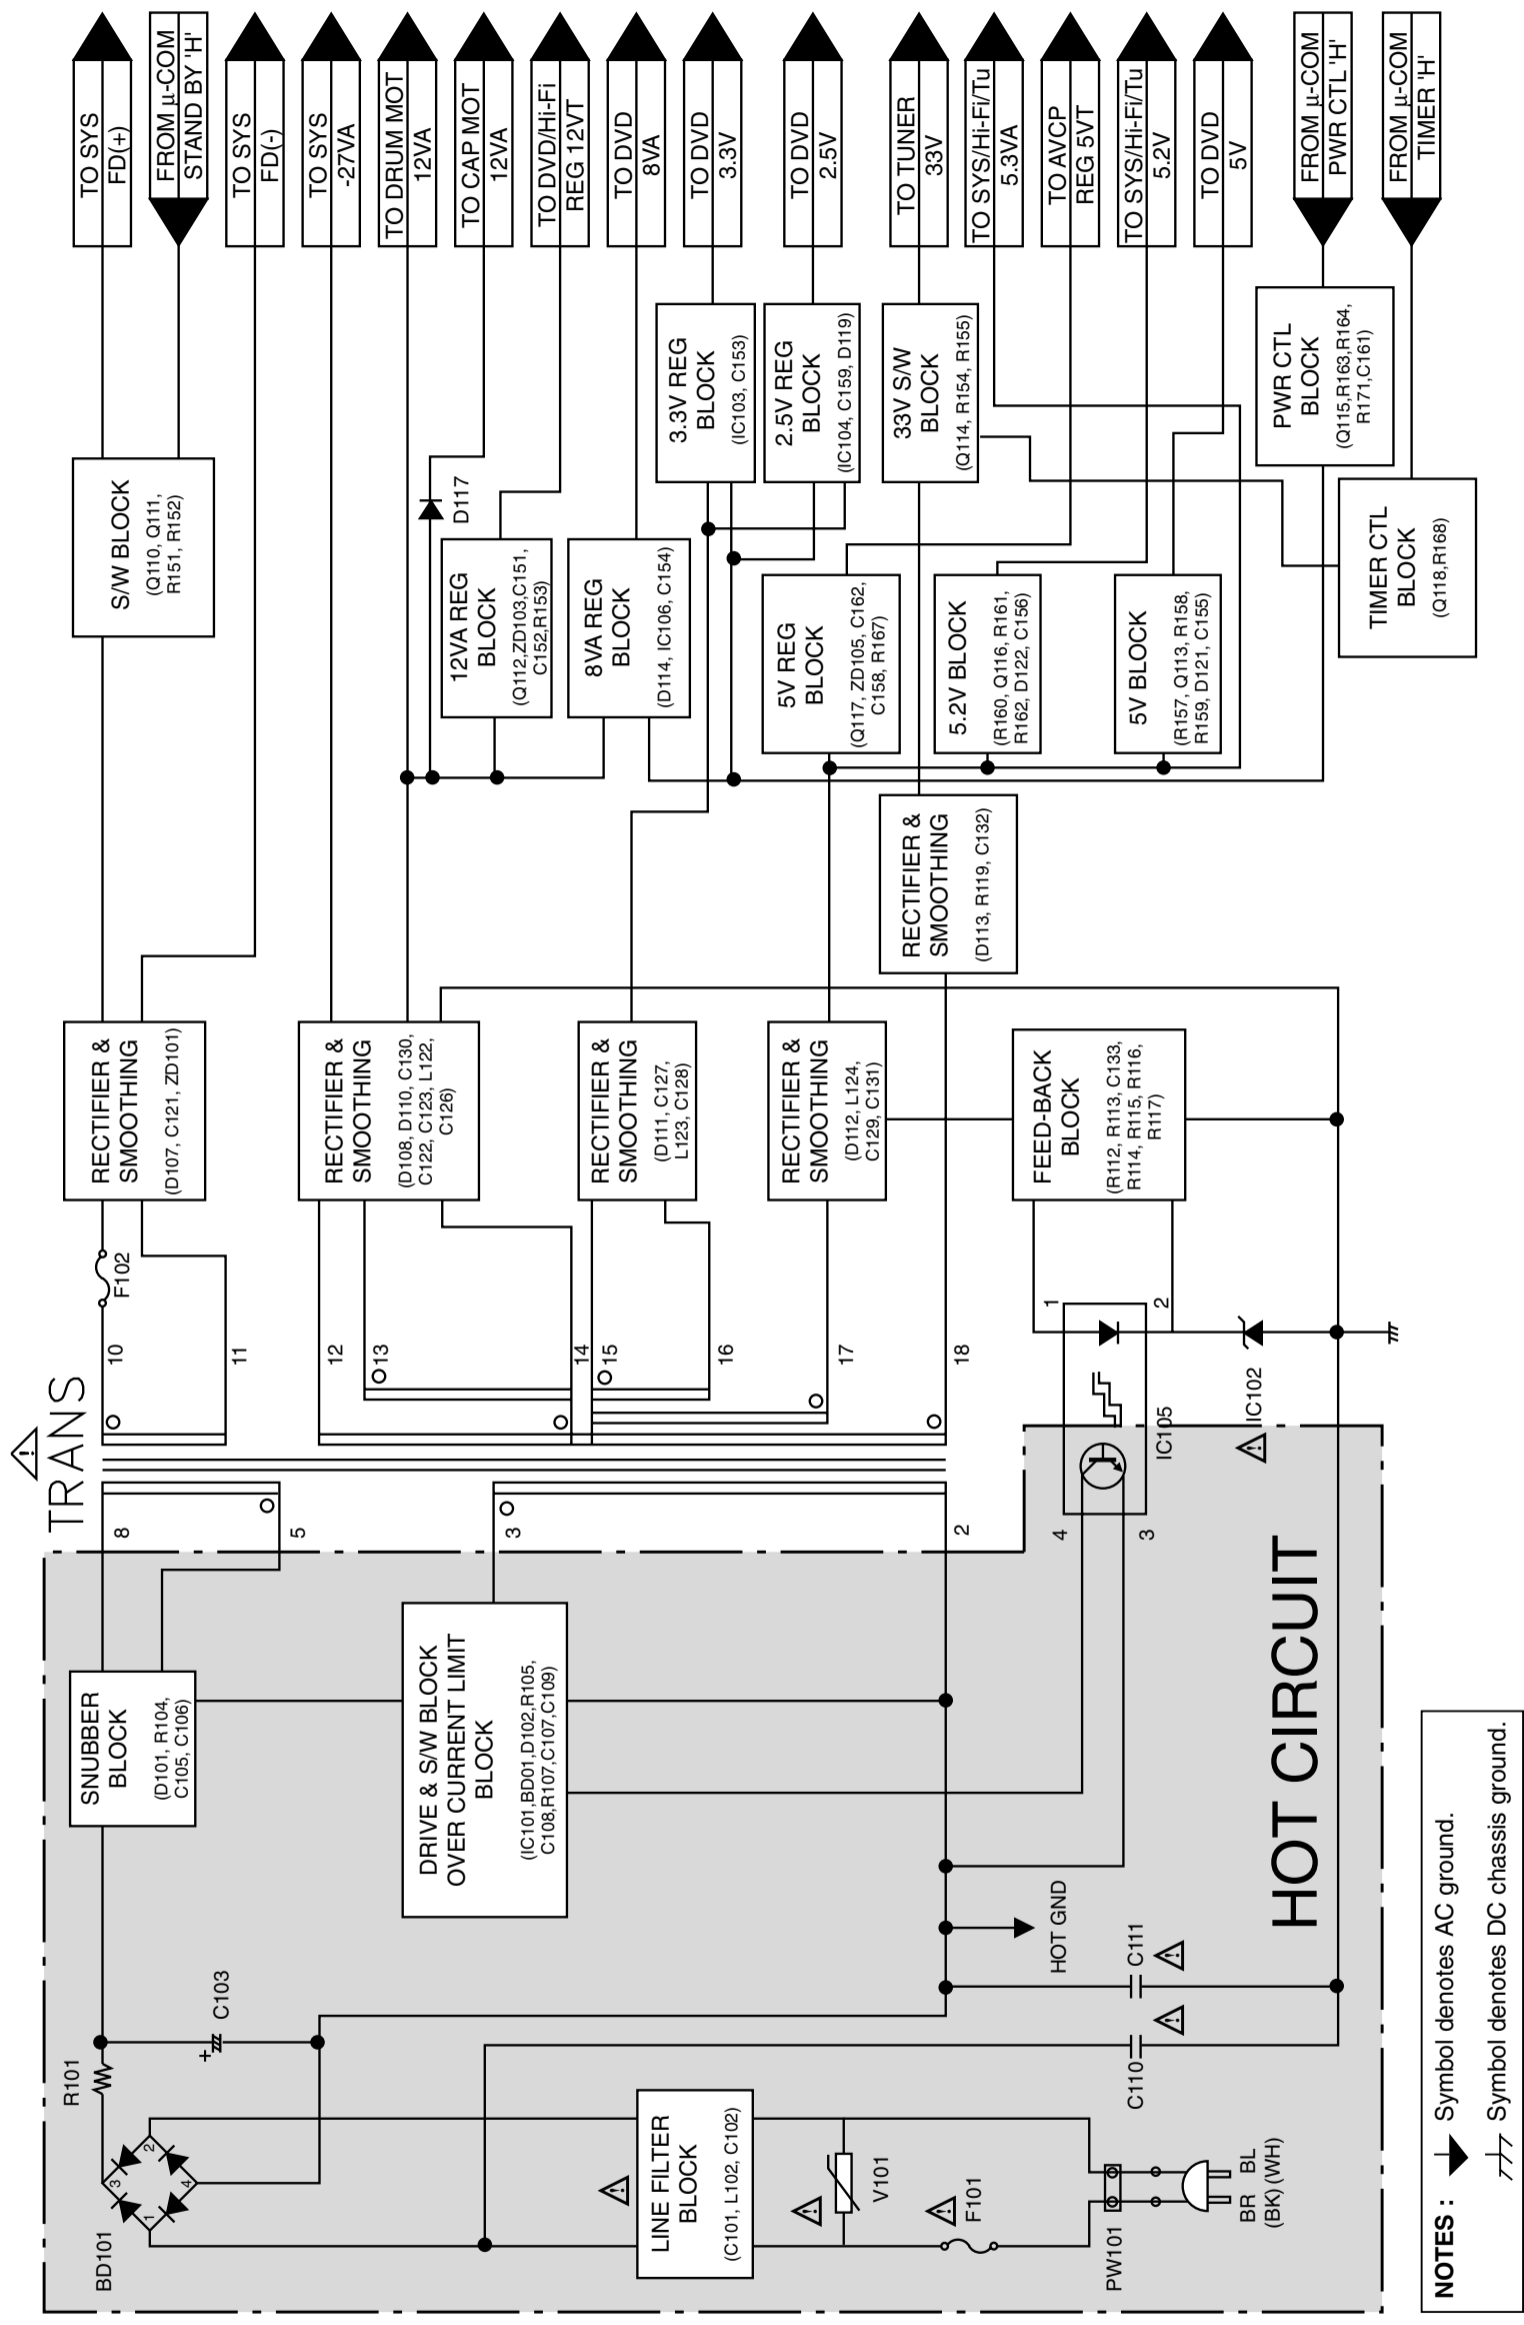



3. VPS BLOCK DIAGRAM

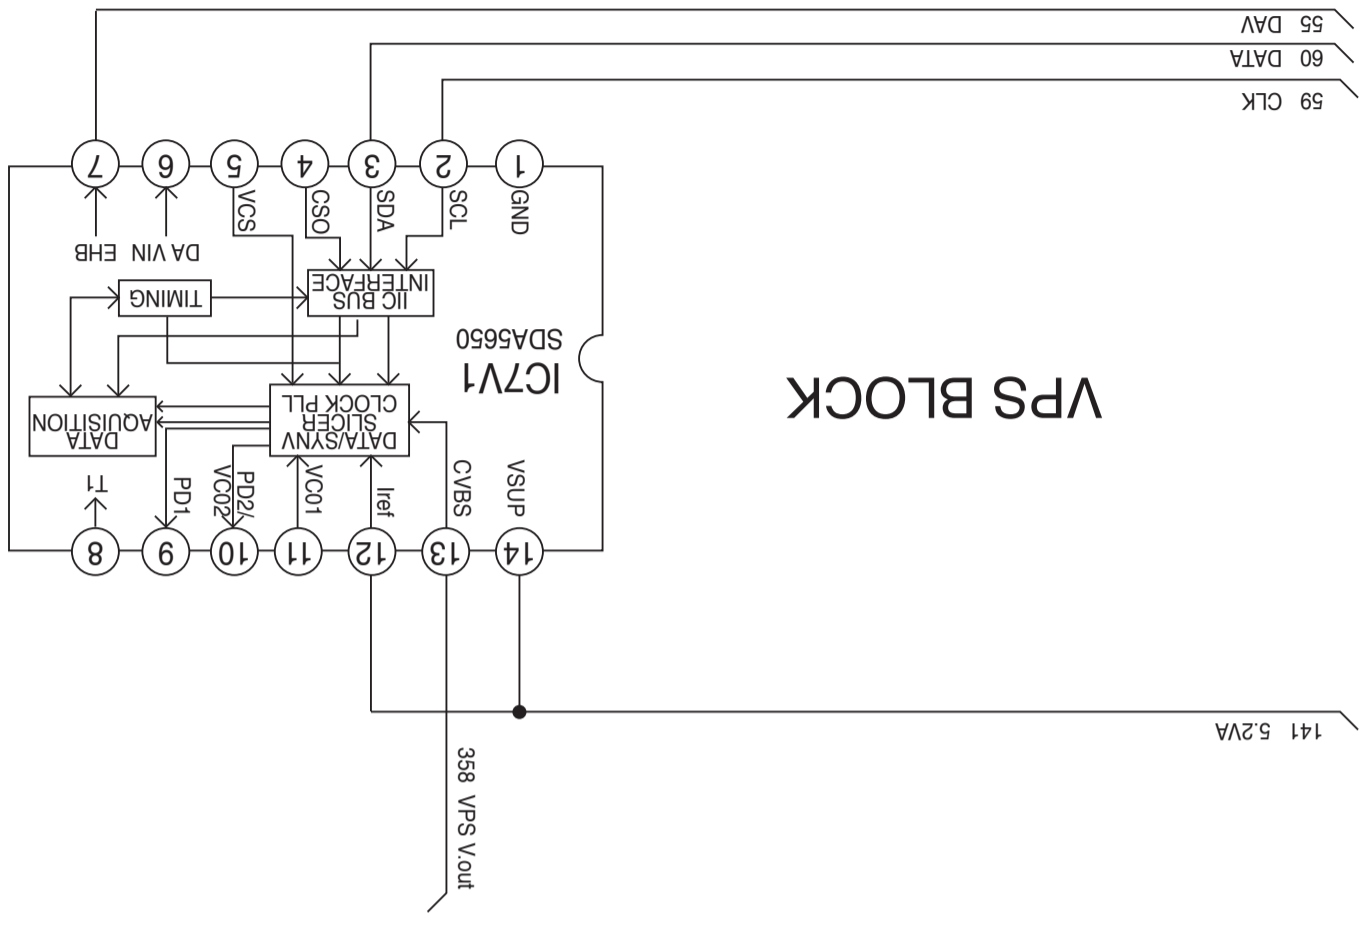

2. Tu/IF, NICAM & A2 BLOCK DIAGRAM

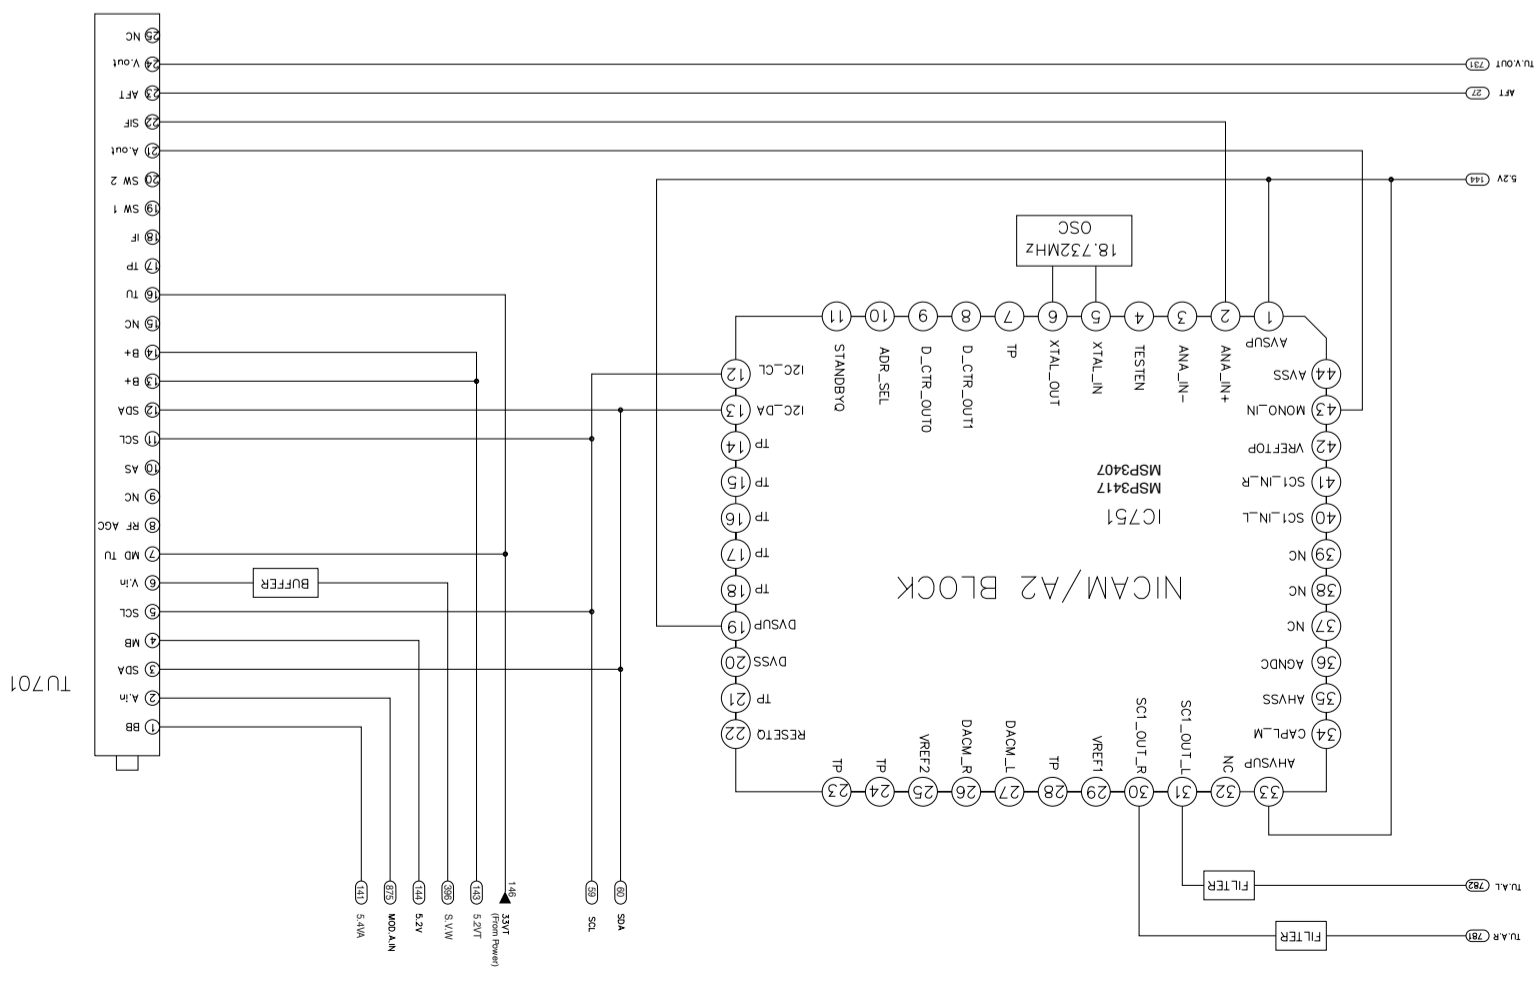


4. Y/C BLOCK DIAGRAM (PB MODE)

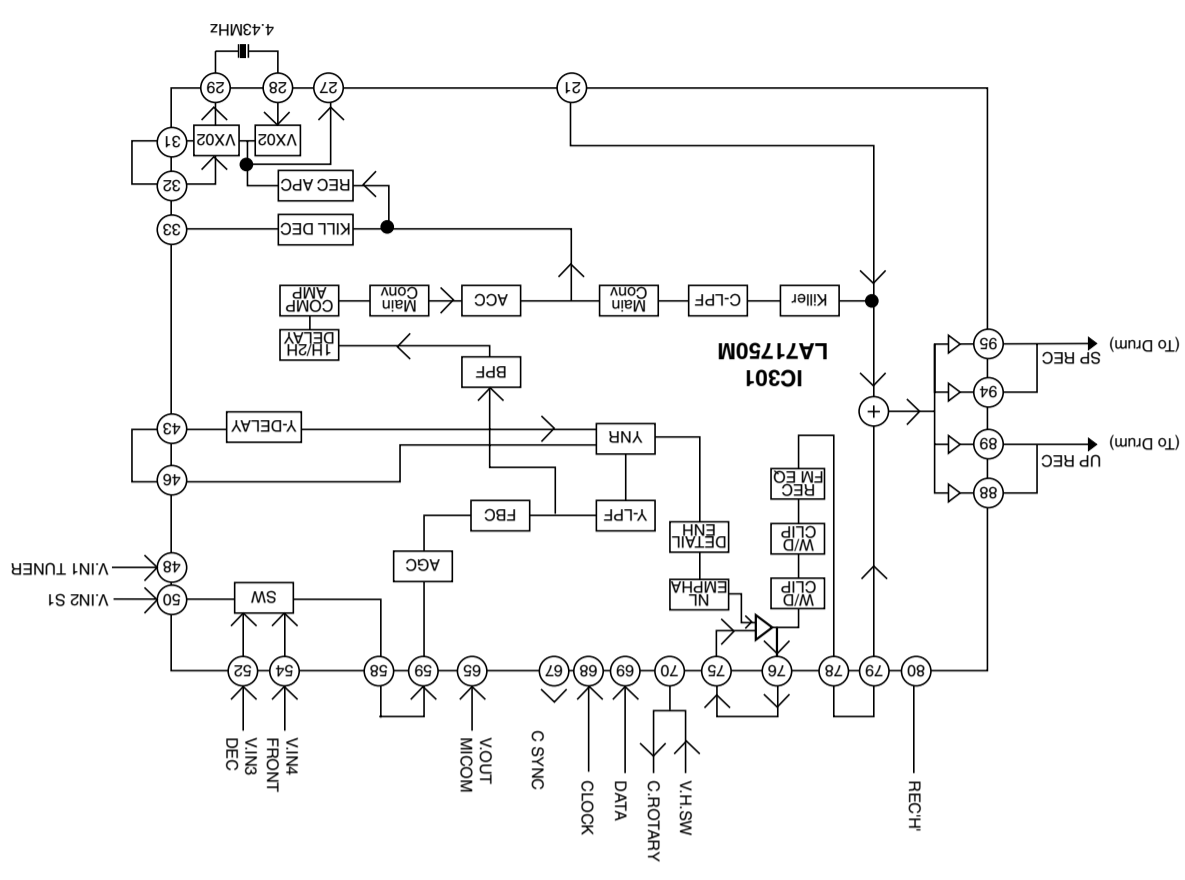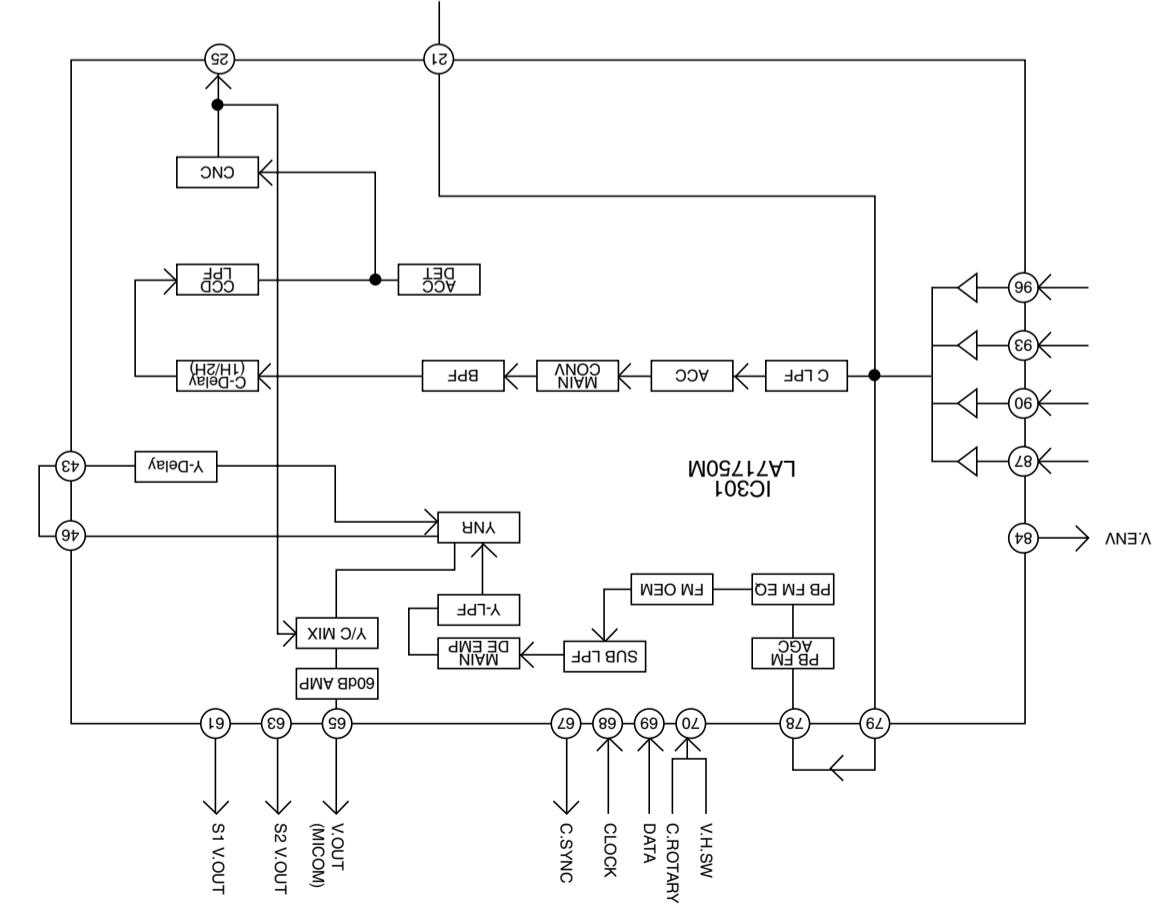


(REC MODE)

5. Hi-Fi BLOCK DIAGRAM

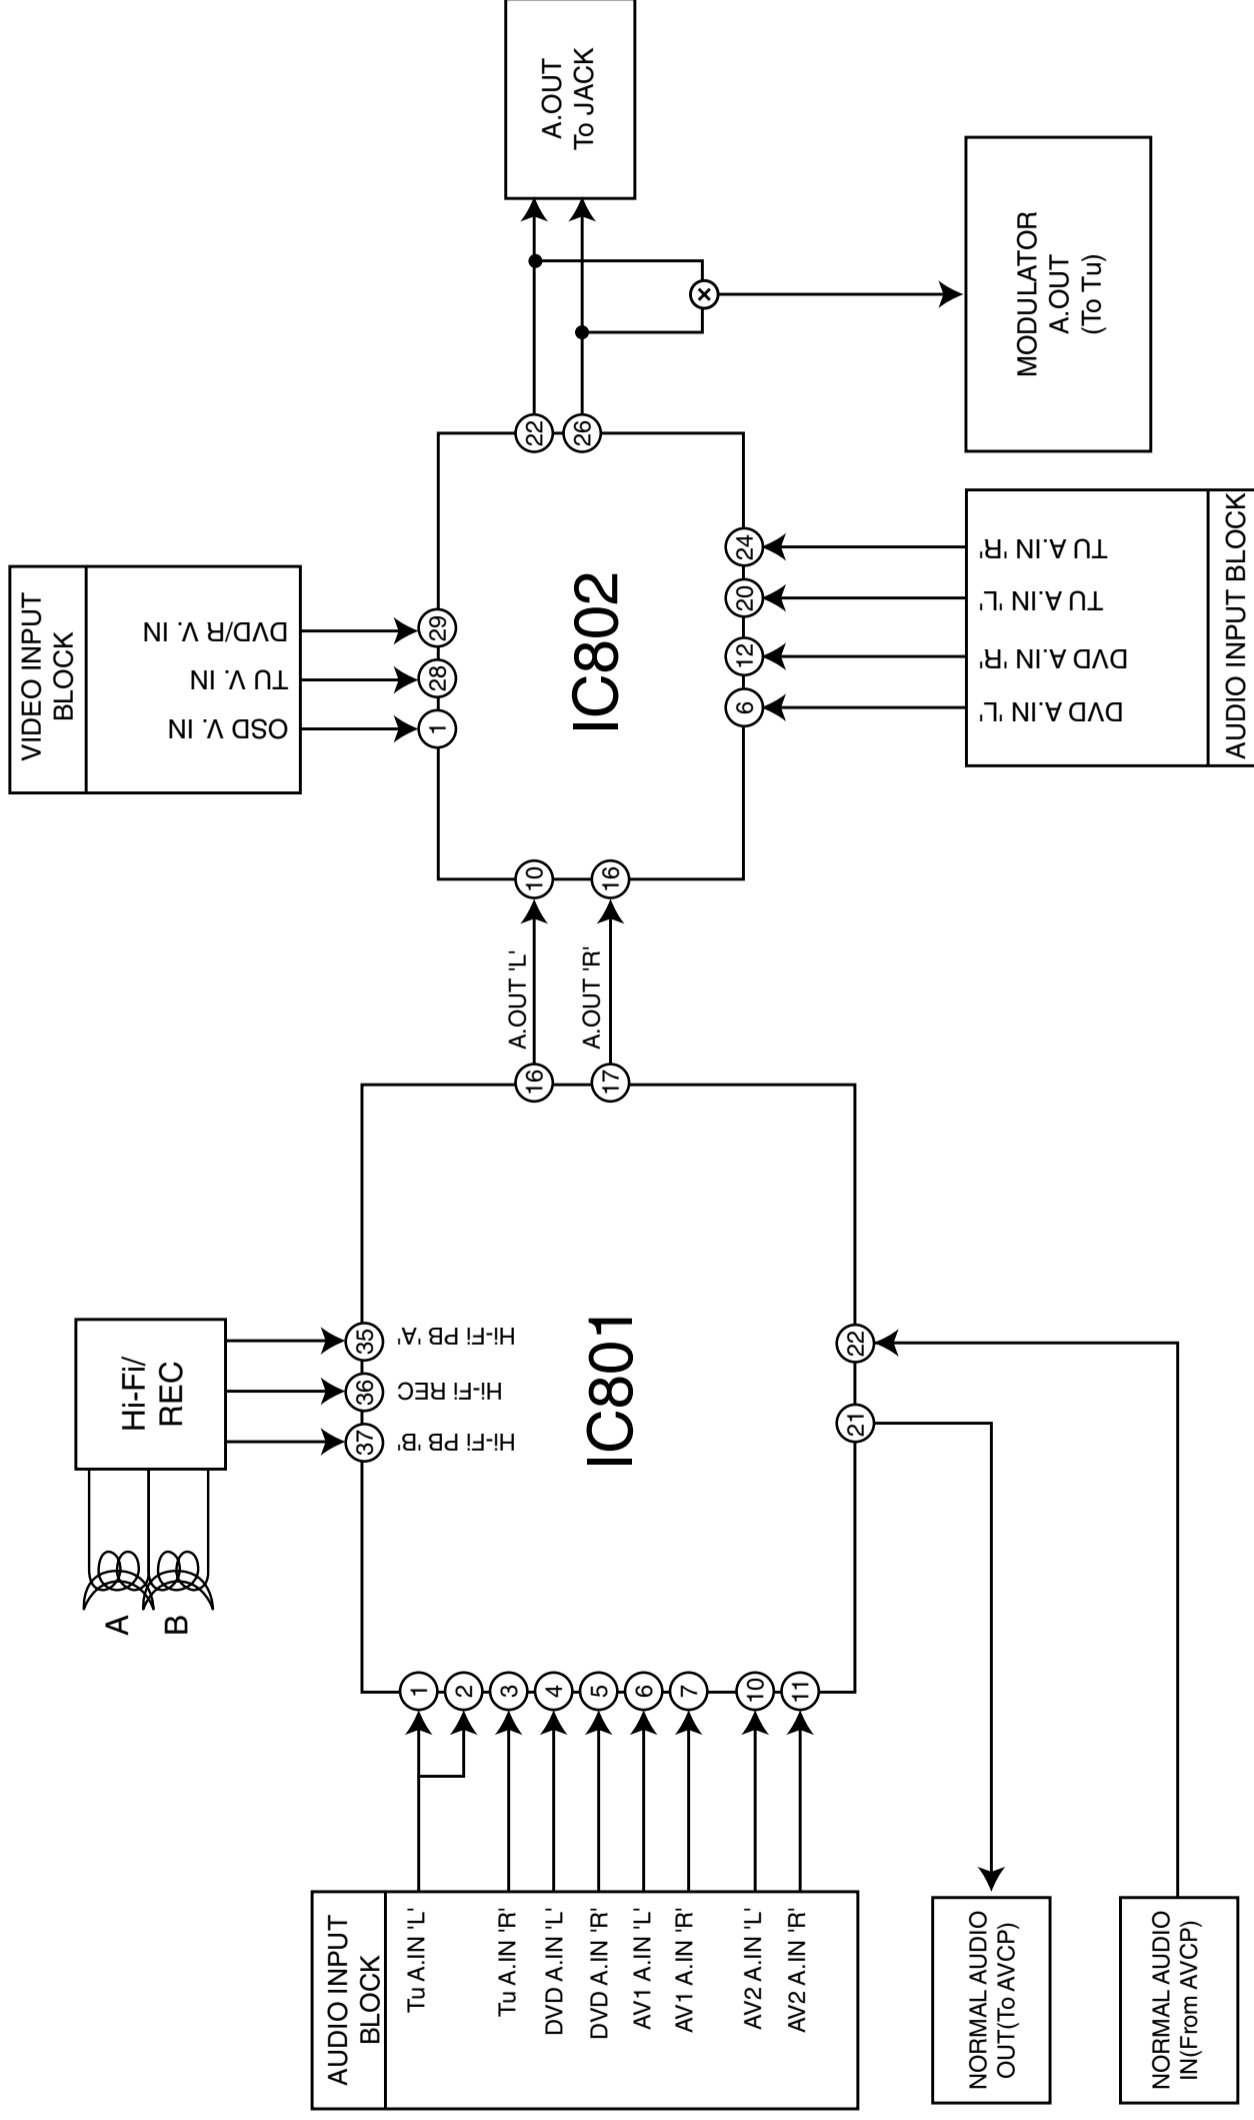

6. SYSTEM BLOCK DIAGRAM

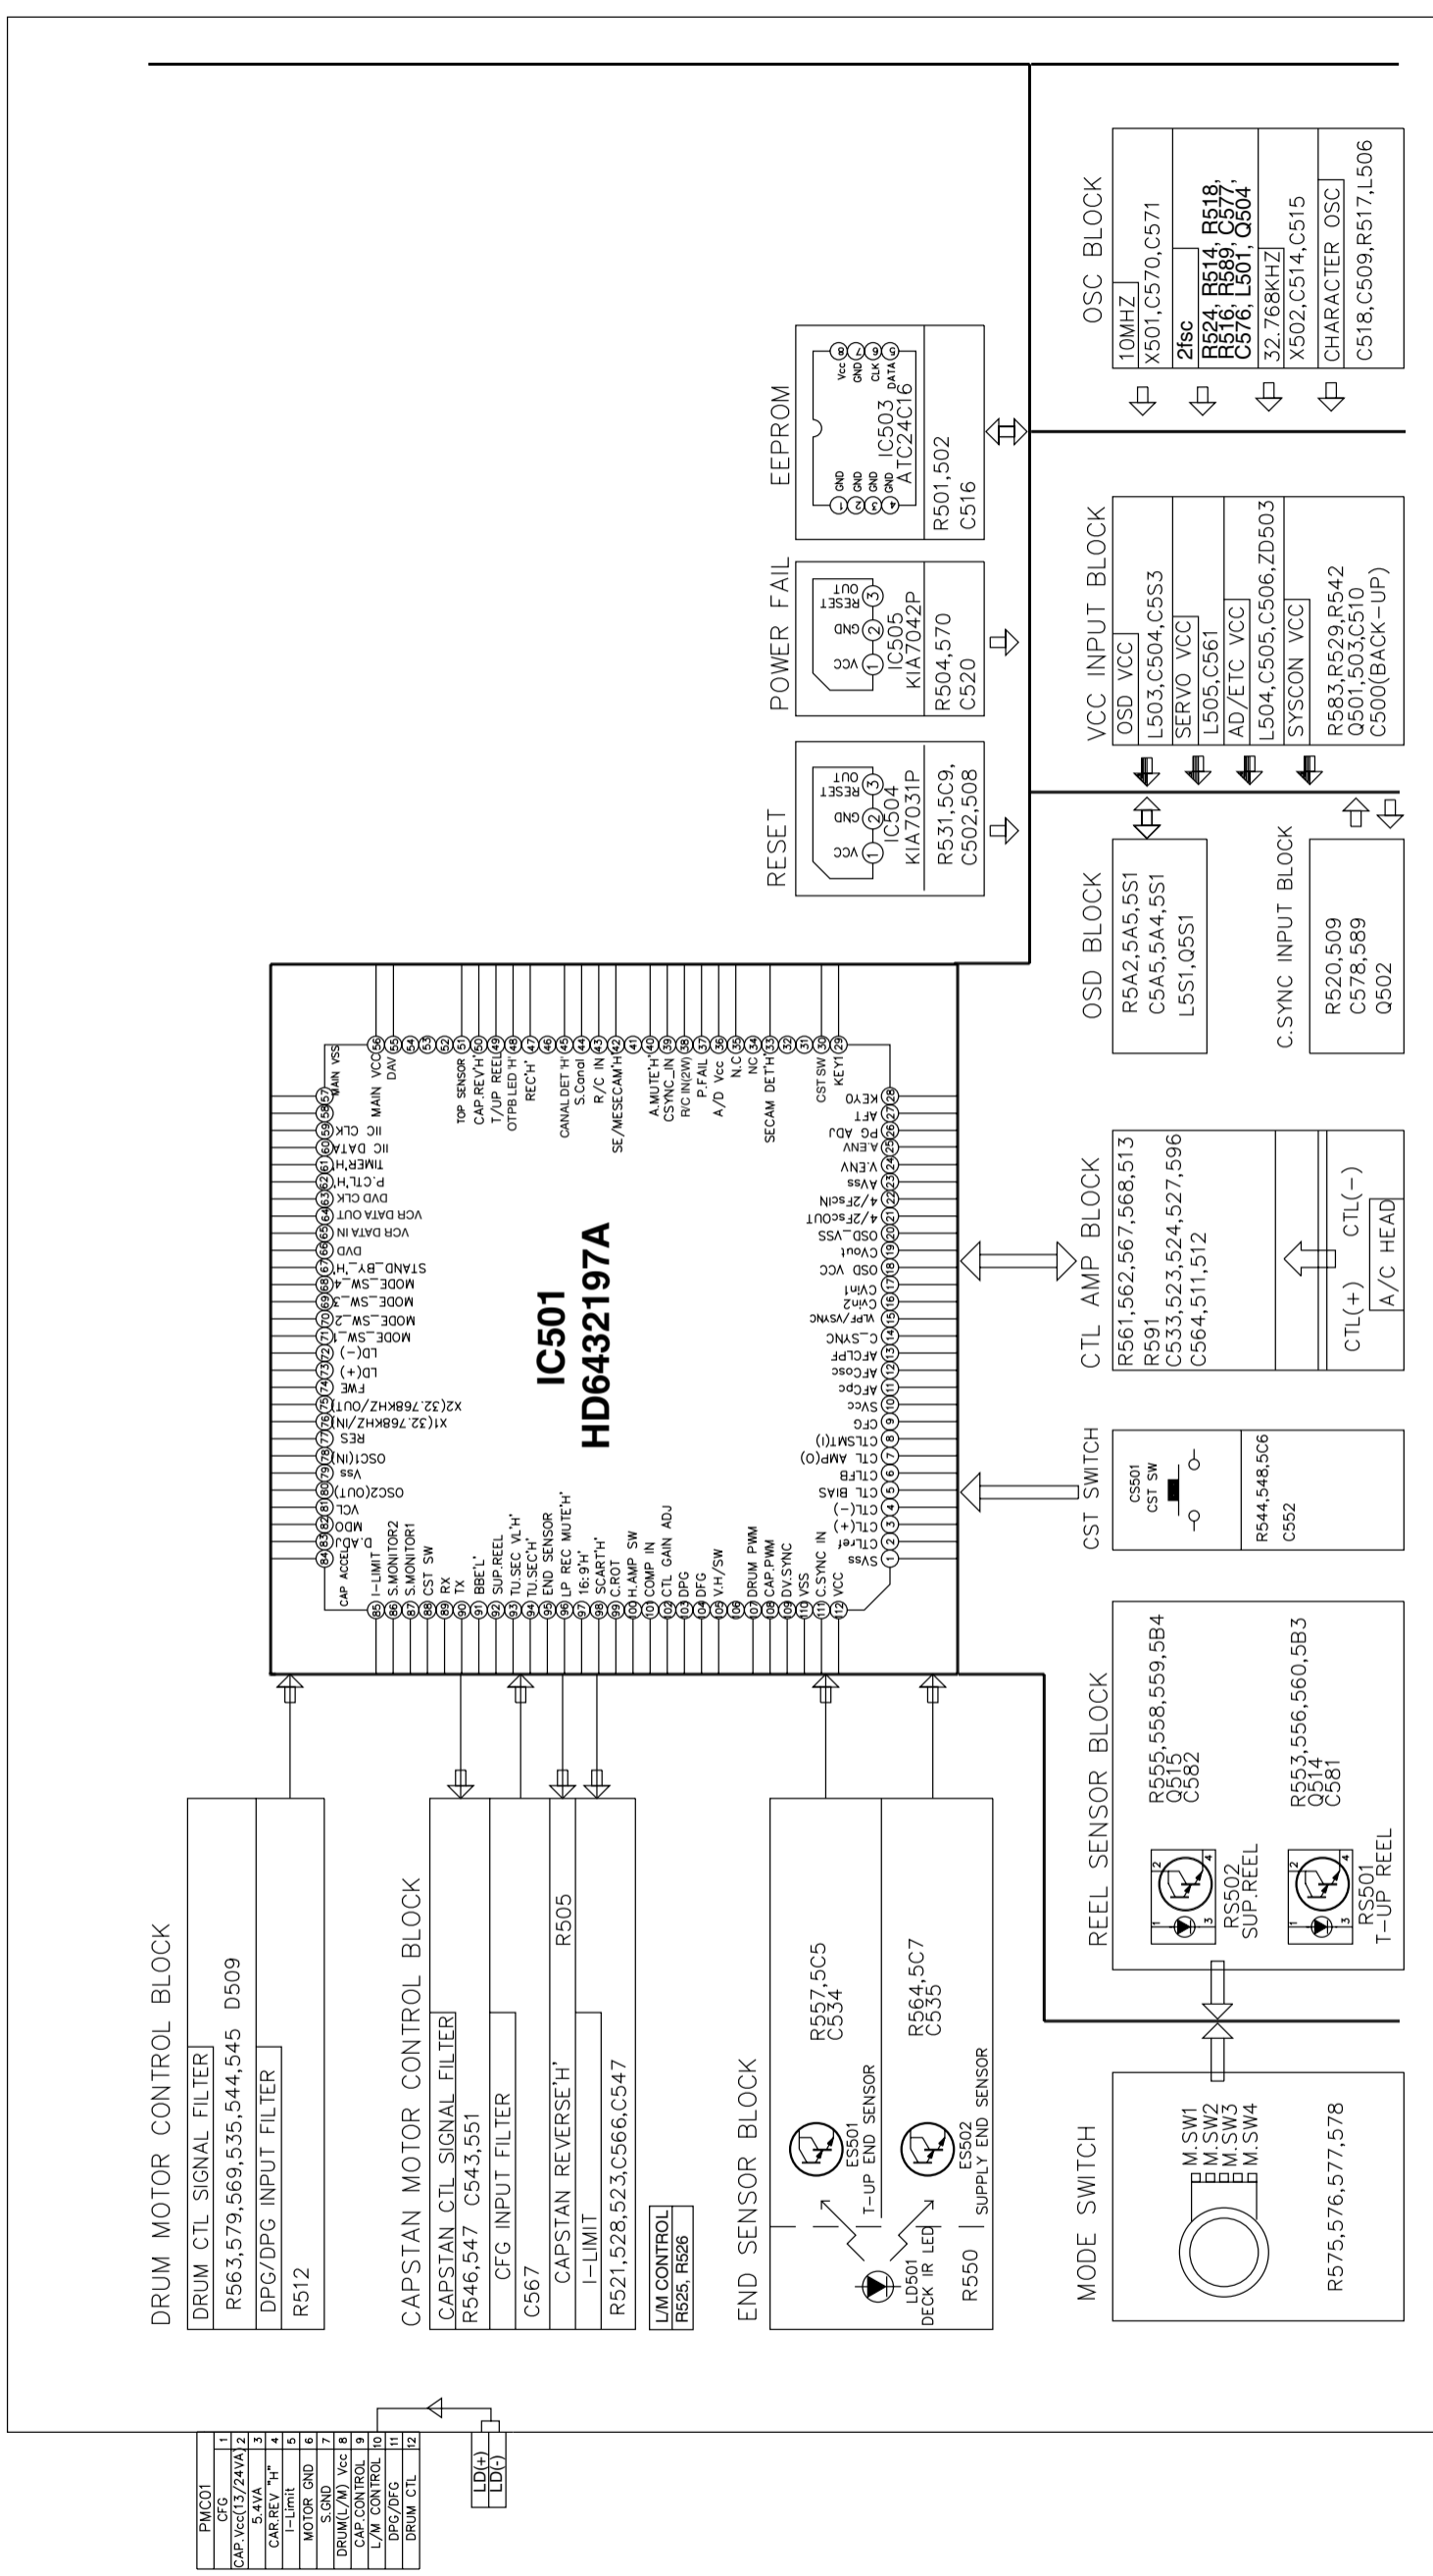

CIRCUIT DIAGRAMS


1. POWER(SMPS) CIRCUIT DIAGRAM

IMPORTANT SAFETY NOTICE

WHEN SERVICING THIS CHASSIS, UNDER NO CIRCUMSTANCES SHOULD THE ORIGINAL DESIGN BE MODIFIED OR ALTERED WITHOUT PERMISSION FROM THE SANYO ELECTRONICS CORPORATION. PERFORMANCE IMPROVEMENT CHANGES INTO ALL COMPONENTS SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGINAL LITERATURE IS PRINTED.

NOTE :

1. Shaded (■) parts are critical for safety. Replace only on the schematic for easy identification.
2. Voltages are DC-measured with a digital voltmeter during Play mode.

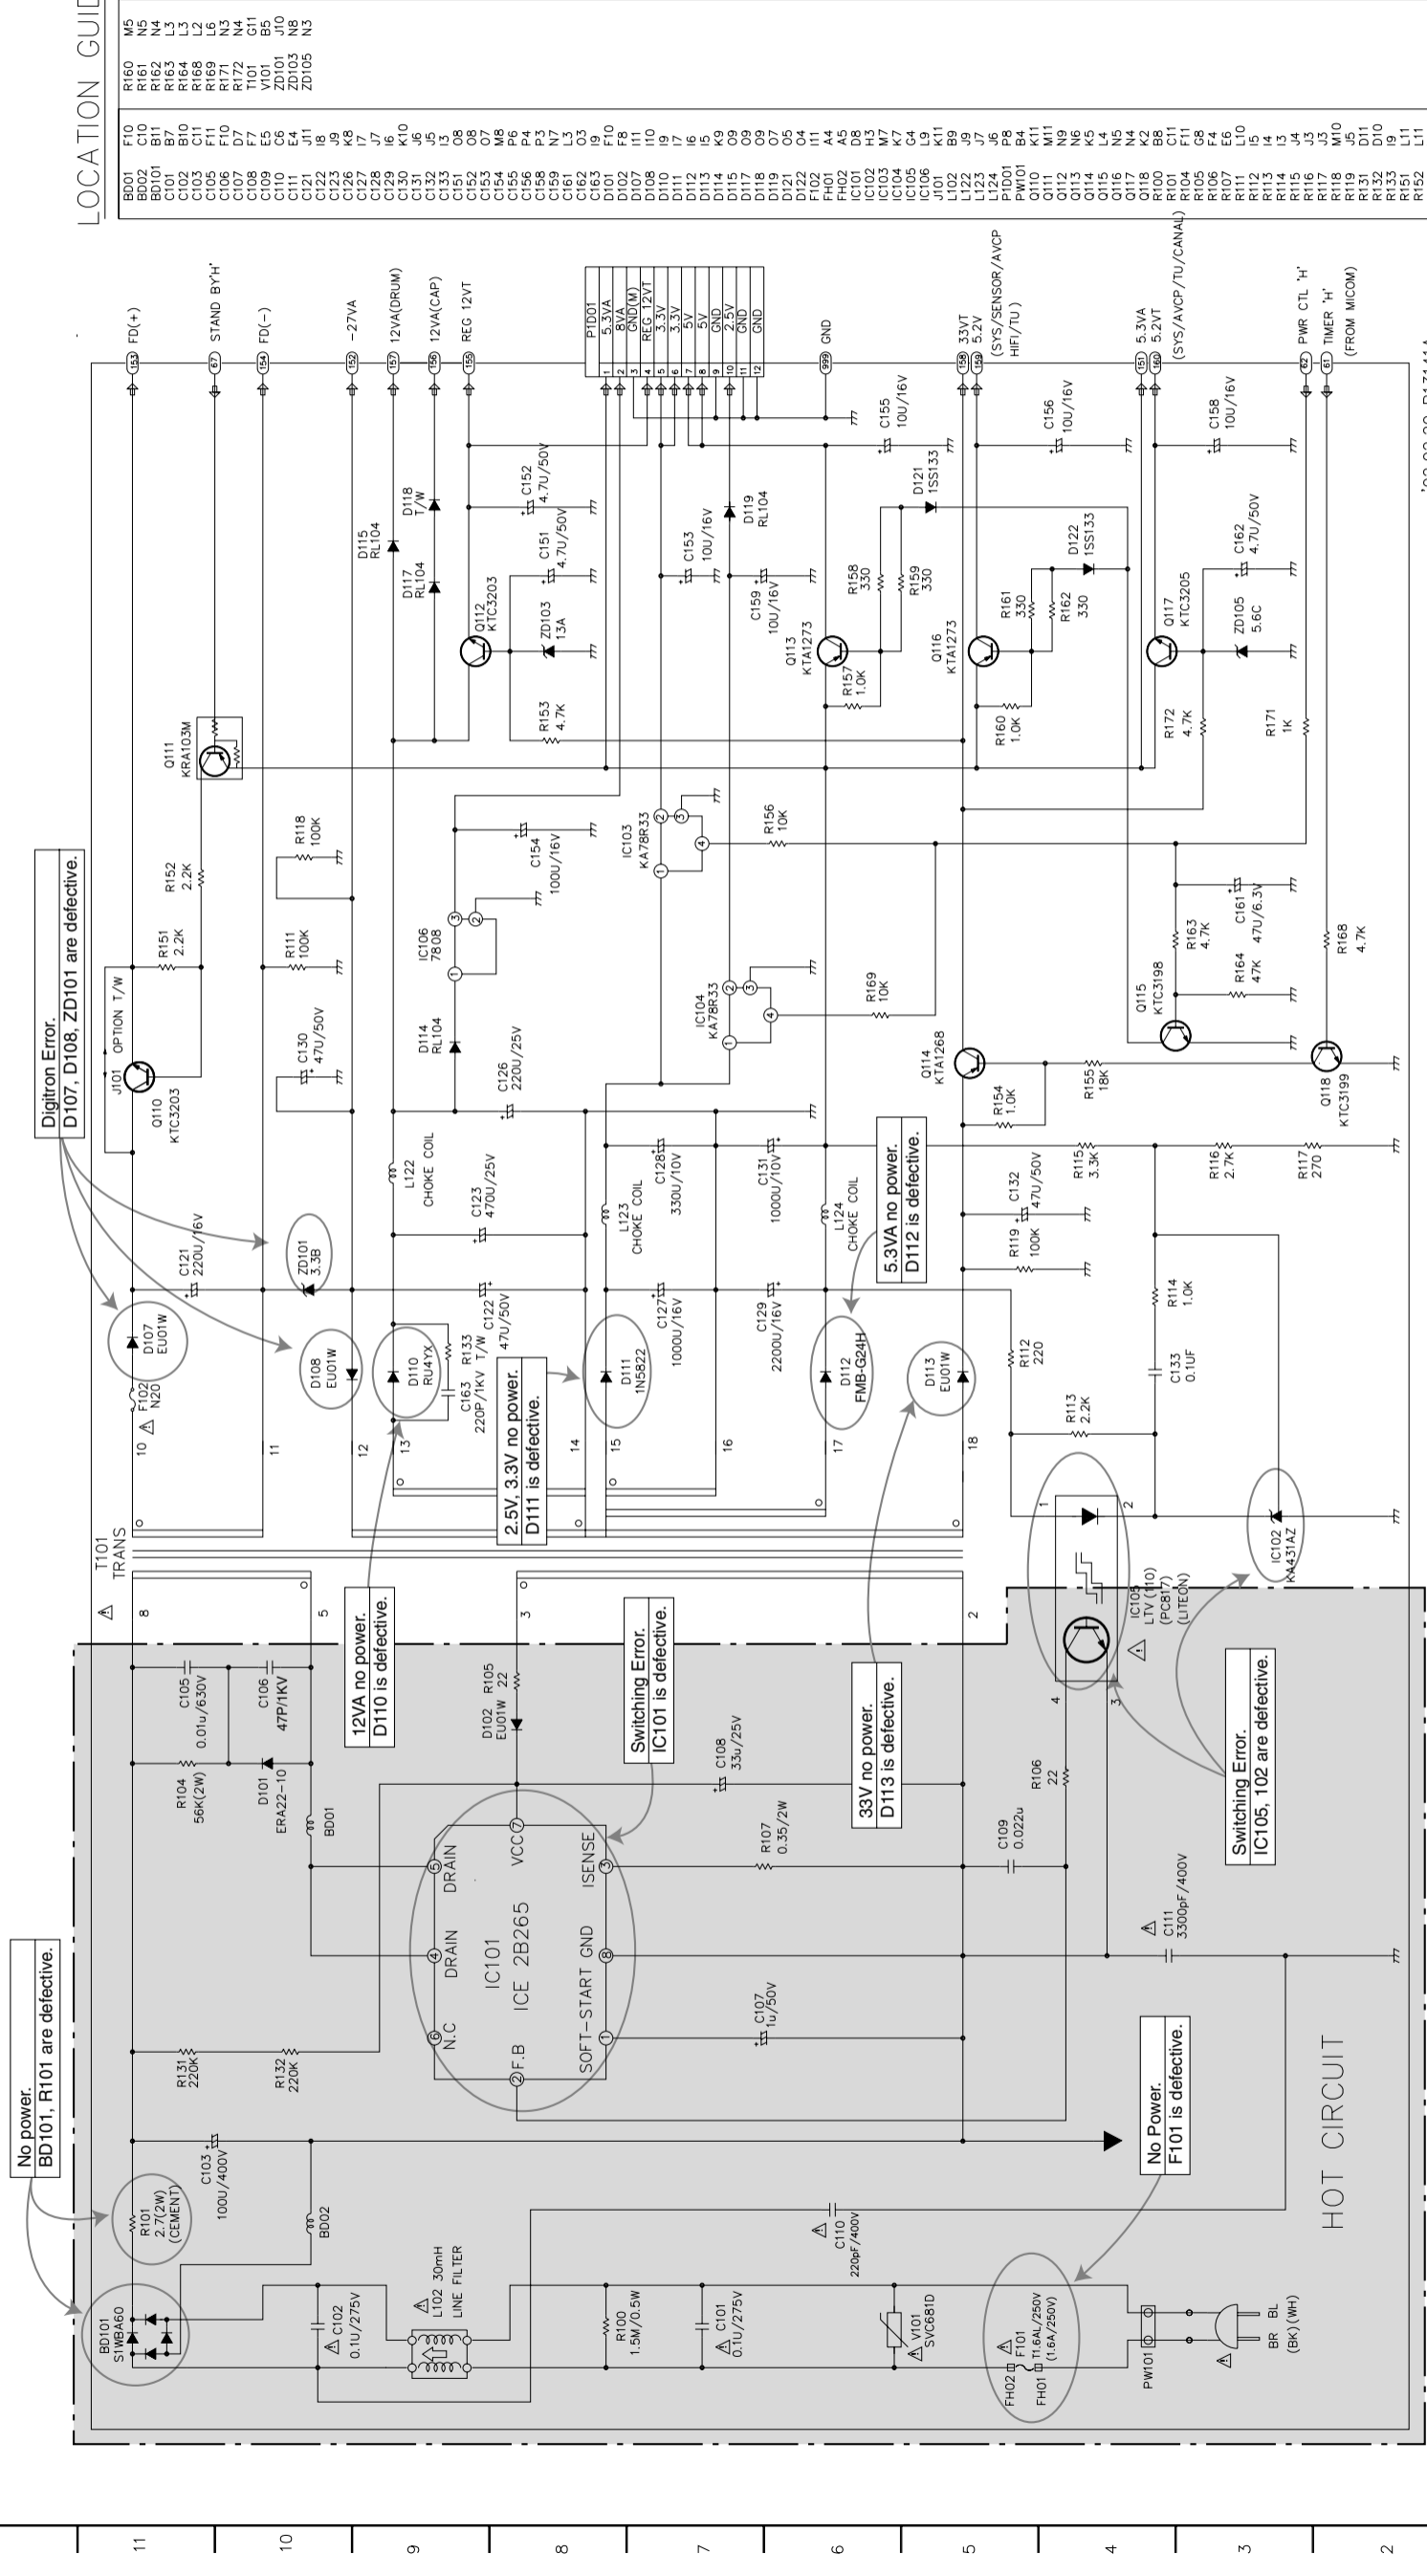


NOTES:
 ↓ Symbol denotes AC ground.
 ▽ Symbol denotes DC chassis ground.

NOTE:
 ⚠ Warning
 Parts that are shaded are critical
 With respect to risk of fire or
 electrical shock.

LOCATION GUIDE

B001	F10	R160	M5
B002	C10	R161	N5
BD101	B11	R162	N4
C101	B7	R163	L3
C102	C11	R164	L2
C103	F11	R165	L1
C104	F10	R166	L6
C105	F10	R167	N3
C106	D7	R168	N4
C107	D7	R169	N4
C108	F7	R170	G11
C109	E5	R171	G11
C110	E4	R172	G11
C111	J11	R173	V101
C112	J11	R174	V101
C113	J9	R175	ZD103
C114	J9	R176	ZD103
C115	J9	R177	ZD105
C116	J9	R178	N3
C117	J7	R179	N3
C118	J7	R180	N3
C119	J6	R181	N3
C120	J6	R182	N3
C121	J5	R183	N3
C122	J5	R184	N3
C123	J5	R185	N3
C124	J5	R186	N3
C125	J5	R187	N3
C126	J5	R188	N3
C127	J5	R189	N3
C128	J5	R190	N3
C129	J5	R191	N3
C130	J5	R192	N3
C131	J5	R193	N3
C132	J5	R194	N3
C133	J5	R195	N3
C134	J5	R196	N3
C135	J5	R197	N3
C136	J5	R198	N3
C137	J5	R199	N3
C138	J5	R200	N3
C139	J5	R201	N3
C140	J5	R202	N3
C141	J5	R203	N3
C142	J5	R204	N3
C143	J5	R205	N3
C144	J5	R206	N3
C145	J5	R207	N3
C146	J5	R208	N3
C147	J5	R209	N3
C148	J5	R210	N3
C149	J5	R211	N3
C150	J5	R212	N3
C151	J5	R213	N3
C152	J5	R214	N3
C153	J5	R215	N3
C154	J5	R216	N3
C155	J5	R217	N3
C156	J5	R218	N3
C157	J5	R219	N3
C158	J5	R220	N3
C159	J5	R221	N3
C160	J5	R222	N3
C161	J5	R223	N3
C162	J5	R224	N3
C163	J5	R225	N3
C164	J5	R226	N3
C165	J5	R227	N3
C166	J5	R228	N3
C167	J5	R229	N3
C168	J5	R230	N3
C169	J5	R231	N3
C170	J5	R232	N3
C171	J5	R233	N3
C172	J5	R234	N3
C173	J5	R235	N3
C174	J5	R236	N3
C175	J5	R237	N3
C176	J5	R238	N3
C177	J5	R239	N3
C178	J5	R240	N3
C179	J5	R241	N3
C180	J5	R242	N3
C181	J5	R243	N3
C182	J5	R244	N3
C183	J5	R245	N3
C184	J5	R246	N3
C185	J5	R247	N3
C186	J5	R248	N3
C187	J5	R249	N3
C188	J5	R250	N3
C189	J5	R251	N3
C190	J5	R252	N3
C191	J5	R253	N3
C192	J5	R254	N3
C193	J5	R255	N3
C194	J5	R256	N3
C195	J5	R257	N3
C196	J5	R258	N3
C197	J5	R259	N3
C198	J5	R260	N3
C199	J5	R261	N3
C200	J5	R262	N3

2. TU/IF, NICAM & A2 CIRCUIT DIAGRAM

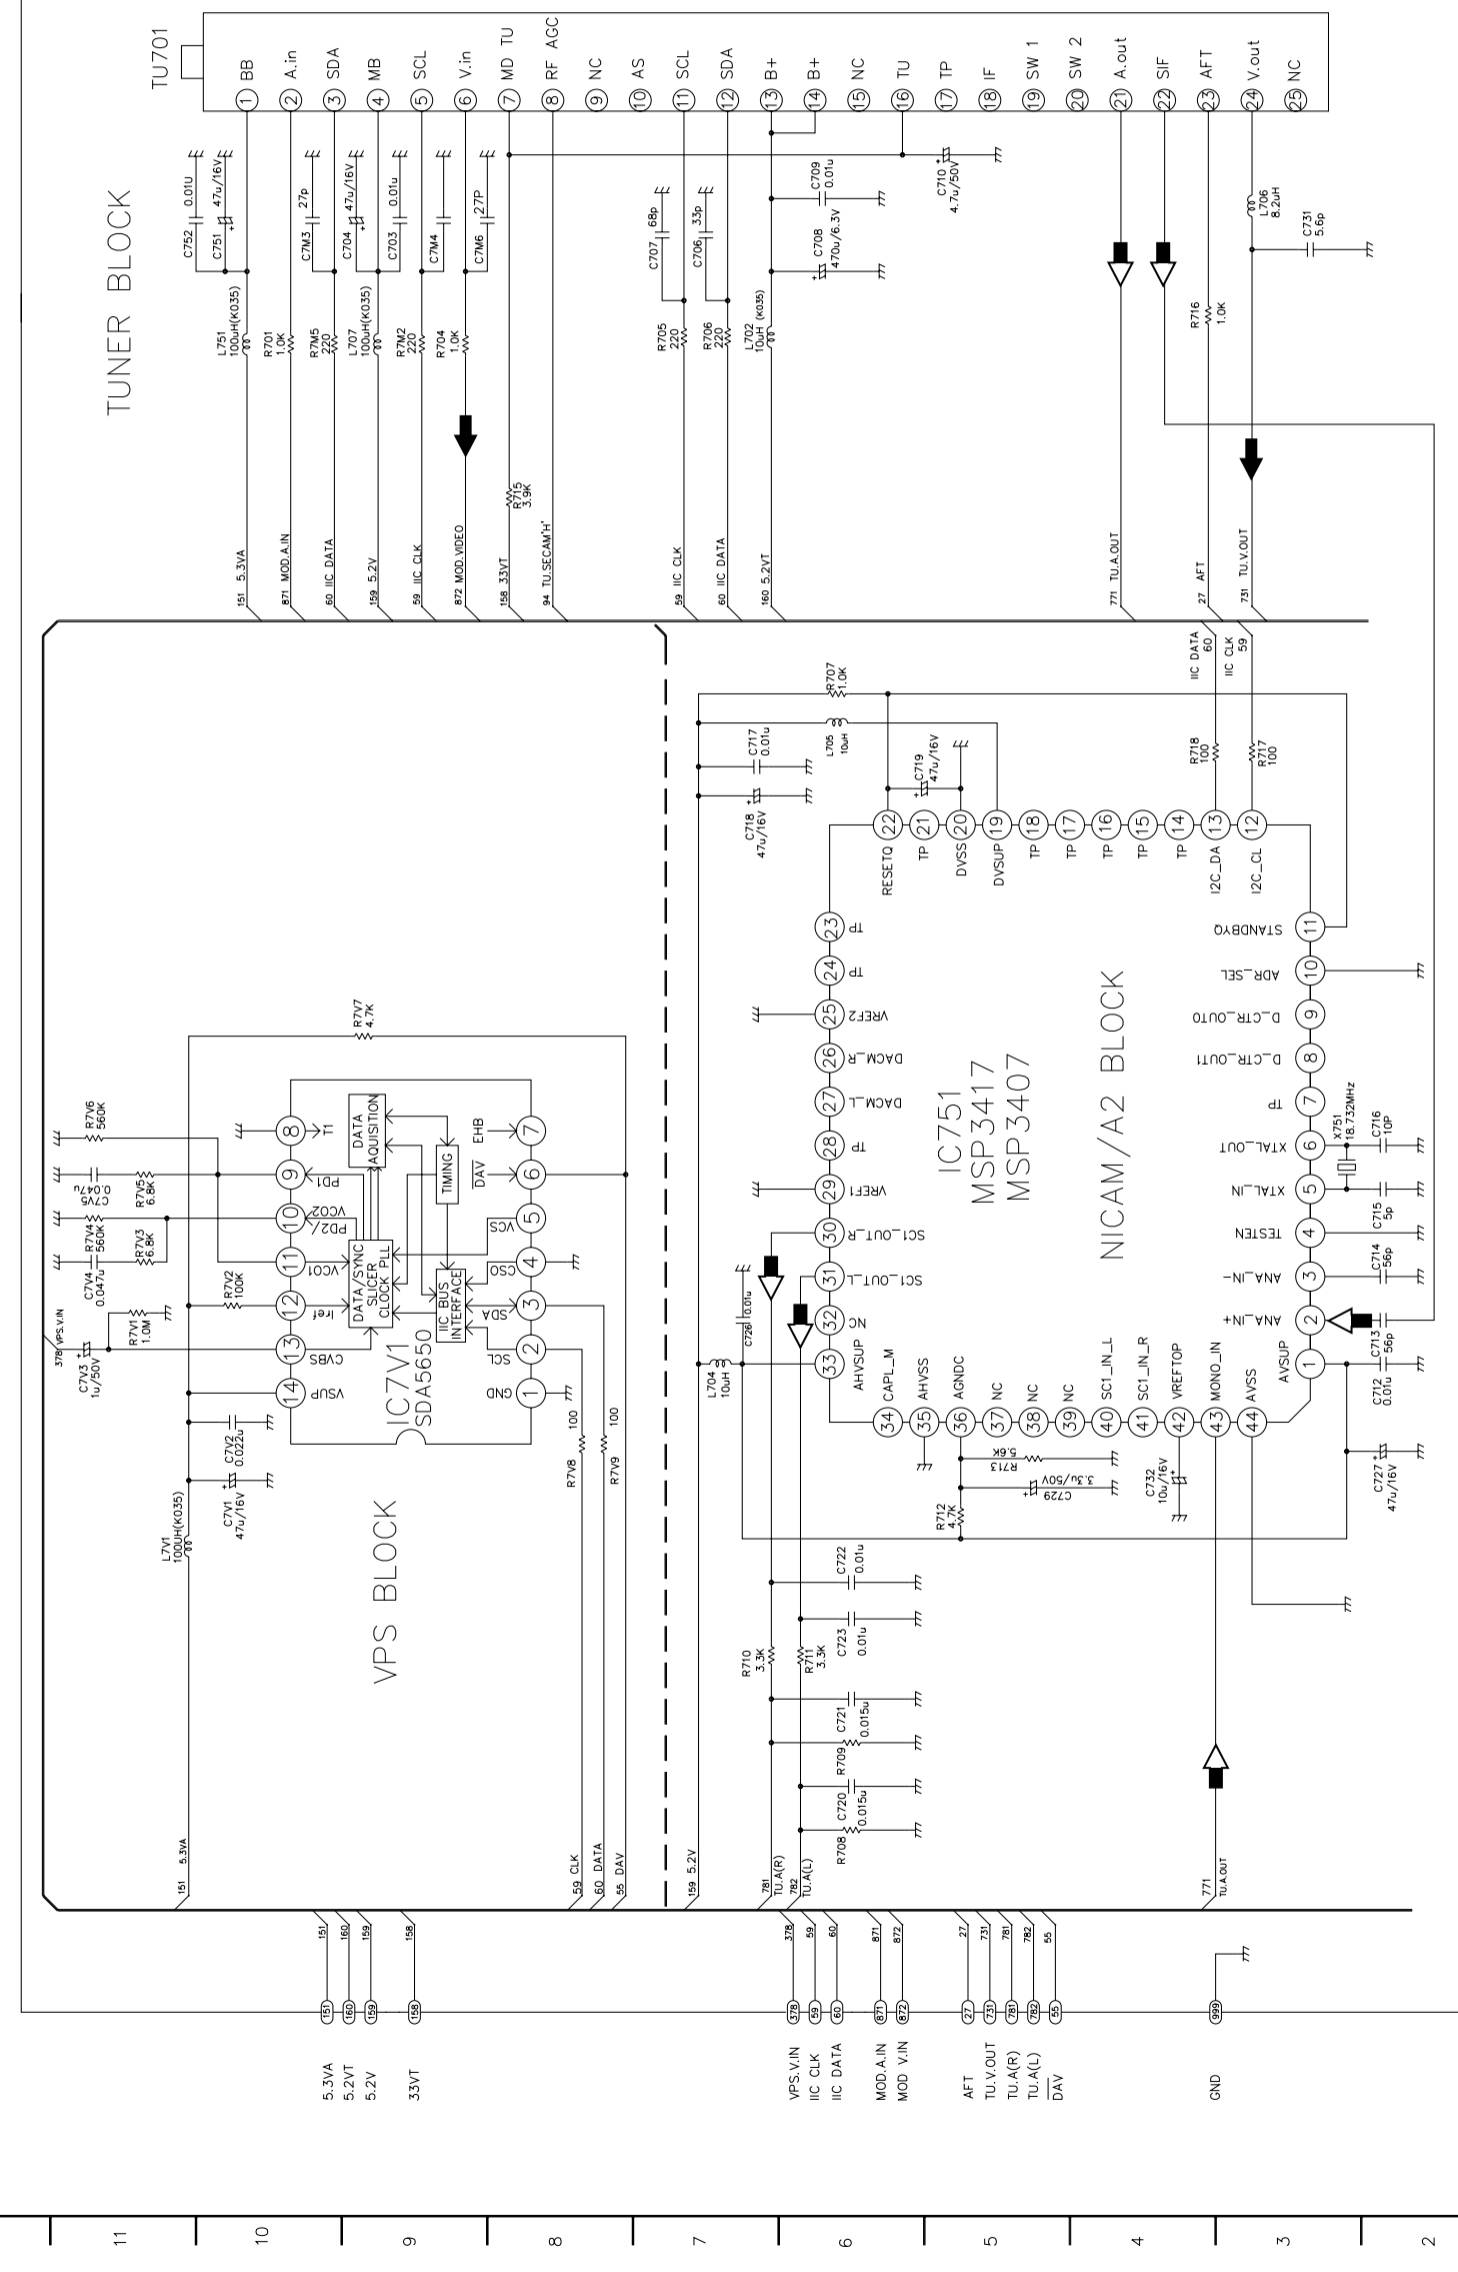

'02.02.20.R13145A
 Schematic TU/IF/NICAM/A2
 SANYO SCART

EE MODE (VIDEO)
 TU MODE (AUDIO)

LOCATION GUIDE


C703	N9
C704	N8
C705	N7
C706	N6
C707	N5
C708	F2
C709	F1
C710	F2
C711	F2
C712	F2
C713	F2
C714	F2
C715	F2
C716	F2
C717	F2
C718	F2
C719	F2
C720	F2
C721	F2
C722	F2
C723	F2
C724	F2
C725	F2
C726	F2
C727	F2
C728	F2
C729	F2
C730	F2
C731	F2
C732	F2
C733	F2
C734	F2
C735	F2
C736	F2
C737	F2
C738	F2
C739	F2
C740	F2
C741	F2
C742	F2
C743	F2
C744	F2
C745	F2
C746	F2
C747	F2
C748	F2
C749	F2
C750	F2
C751	F2
C752	F2
C753	F2
C754	F2
C755	F2
C756	F2
C757	F2
C758	F2
C759	F2
C760	F2
C761	F2
C762	F2
C763	F2
C764	F2
C765	F2
C766	F2
C767	F2
C768	F2
C769	F2
C770	F2
C771	F2
C772	F2
C773	F2
C774	F2
C775	F2
C776	F2
C777	F2
C778	F2
C779	F2
C780	F2
C781	F2
C782	F2
C783	F2
C784	F2
C785	F2
C786	F2
C787	F2
C788	F2
C789	F2
C790	F2
C791	F2
C792	F2
C793	F2
C794	F2
C795	F2
C796	F2
C797	F2
C798	F2
C799	F2
C800	F2
C801	F2
C802	F2
C803	F2
C804	F2
C805	F2
C806	F2
C807	F2
C808	F2
C809	F2
C810	F2
C811	F2
C812	F2
C813	F2
C814	F2
C815	F2
C816	F2
C817	F2
C818	F2
C819	F2
C820	F2
C821	F2
C822	F2
C823	F2
C824	F2
C825	F2
C826	F2
C827	F2
C828	F2
C829	F2
C830	F2
C831	F2
C832	F2
C833	F2
C834	F2
C835	F2
C836	F2
C837	F2
C838	F2
C839	F2
C840	F2
C841	F2
C842	F2
C843	F2
C844	F2
C845	F2
C846	F2
C847	F2
C848	F2
C849	F2
C850	F2
C851	F2
C852	F2
C853	F2
C854	F2
C855	F2
C856	F2
C857	F2
C858	F2
C859	F2
C860	F2
C861	F2
C862	F2
C863	F2
C864	F2
C865	F2
C866	F2
C867	F2
C868	F2
C869	F2
C870	F2
C871	F2
C872	F2
C873	F2
C874	F2
C875	F2
C876	F2
C877	F2
C878	F2
C879	F2
C880	F2
C881	F2
C882	F2
C883	F2
C884	F2
C885	F2
C886	F2
C887	F2
C888	F2
C889	F2
C890	F2
C891	F2
C892	F2
C893	F2
C894	F2
C895	F2
C896	F2
C897	F2
C898	F2
C899	F2
C900	F2
C901	F2
C902	F2
C903	F2
C904	F2
C905	F2
C906	F2
C907	F2
C908	F2
C909	F2
C910	F2
C911	F2
C912	F2
C913	F2
C914	F2
C915	F2
C916	F2
C917	F2
C918	F2
C919	F2
C920	F2
C921	F2
C922	F2
C923	F2
C924	F2
C925	F2
C926	F2
C927	F2
C928	F2
C929	F2
C930	F2
C931	F2
C932	F2
C933	F2
C934	F2
C935	F2
C936	F2
C937	F2
C938	F2
C939	F2
C940	F2
C941	F2
C942	F2
C943	F2
C944	F2
C945	F2
C946	F2
C947	F2
C948	F2
C949	F2
C950	F2
C951	F2
C952	F2
C953	F2
C954	F2
C955	F2
C956	F2
C957	F2
C958	F2
C959	F2
C960	F2
C961	F2
C962	F2
C963	F2
C964	F2
C965	F2
C966	F2
C967	F2
C968	F2
C969	F2
C970	F2
C971	F2
C972	F2
C973	F2
C974	F2
C975	F2
C976	F2
C977	F2
C978	F2
C979	F2
C980	F2
C981	F2
C982	F2
C983	F2
C984	F2
C985	F2
C986	F2
C987	F2
C988	F2
C989	F2
C990	F2
C991	F2
C992	F2
C993	F2
C994	F2
C995	F2
C996	F2
C997	F2
C998	F2
C999	F2
C1000	F2

A B C D E F G H I J K L M N O P Q

3. AV CIRCUIT DIAGRAM

LOCATION GUIDE

C301	IC301	F8
C302	J301	G3
C303	L301	F10
C304	L302	D3
C305	F11	D3
C306	L303	H3
C307	L304	I3
C308	L305	K8
C309	L306	K8
C310	L307	C7
C311	P3001	A10
C312	P3002	A10
C313	P3003	A11
C314	C301	C5
C315	C302	D4
C316	C303	E4
C317	C304	E4
C318	C305	F4
C319	C306	C3
C320	C307	F4
C321	C308	H10
C322	C309	I10
C323	C310	N6
C324	C311	N6
C325	C312	M9
C326	C313	M9
C327	C314	E5
C328	C315	E5
C329	C316	E5
C330	C317	D3
C331	C318	D3
C332	C319	H9
C333	C320	H9
C334	C321	E10
C335	C322	E10
C336	C323	D4
C337	C324	D4
C338	C325	D4
C339	C326	D10
C340	C327	D10
C341	C328	D4
C342	C329	D4
C343	C330	D4
C344	C331	D4
C345	C332	D4
C346	C333	D4
C347	C334	D4
C348	C335	D4
C349	C336	D4
C350	C337	D4
C351	C338	D4
C352	C339	D4
C353	C340	D4
C354	C341	D4
C355	C342	D4
C356	C343	D4
C357	C344	D4
C358	C345	D4
C359	C346	D4
C360	C347	D4
C361	C348	D4
C362	C349	D4
C363	C350	D4
C364	C351	D4
C365	C352	D4
C366	C353	D4
C367	C354	D4
C368	C355	D4
C369	C356	D4
C370	C357	D4
C371	C358	D4
C372	C359	D4
C373	C360	D4
C374	C361	D4
C375	C362	D4
C376	C363	D4
C377	C364	D4
D301	FL301	D10
IC201	IC201	M8

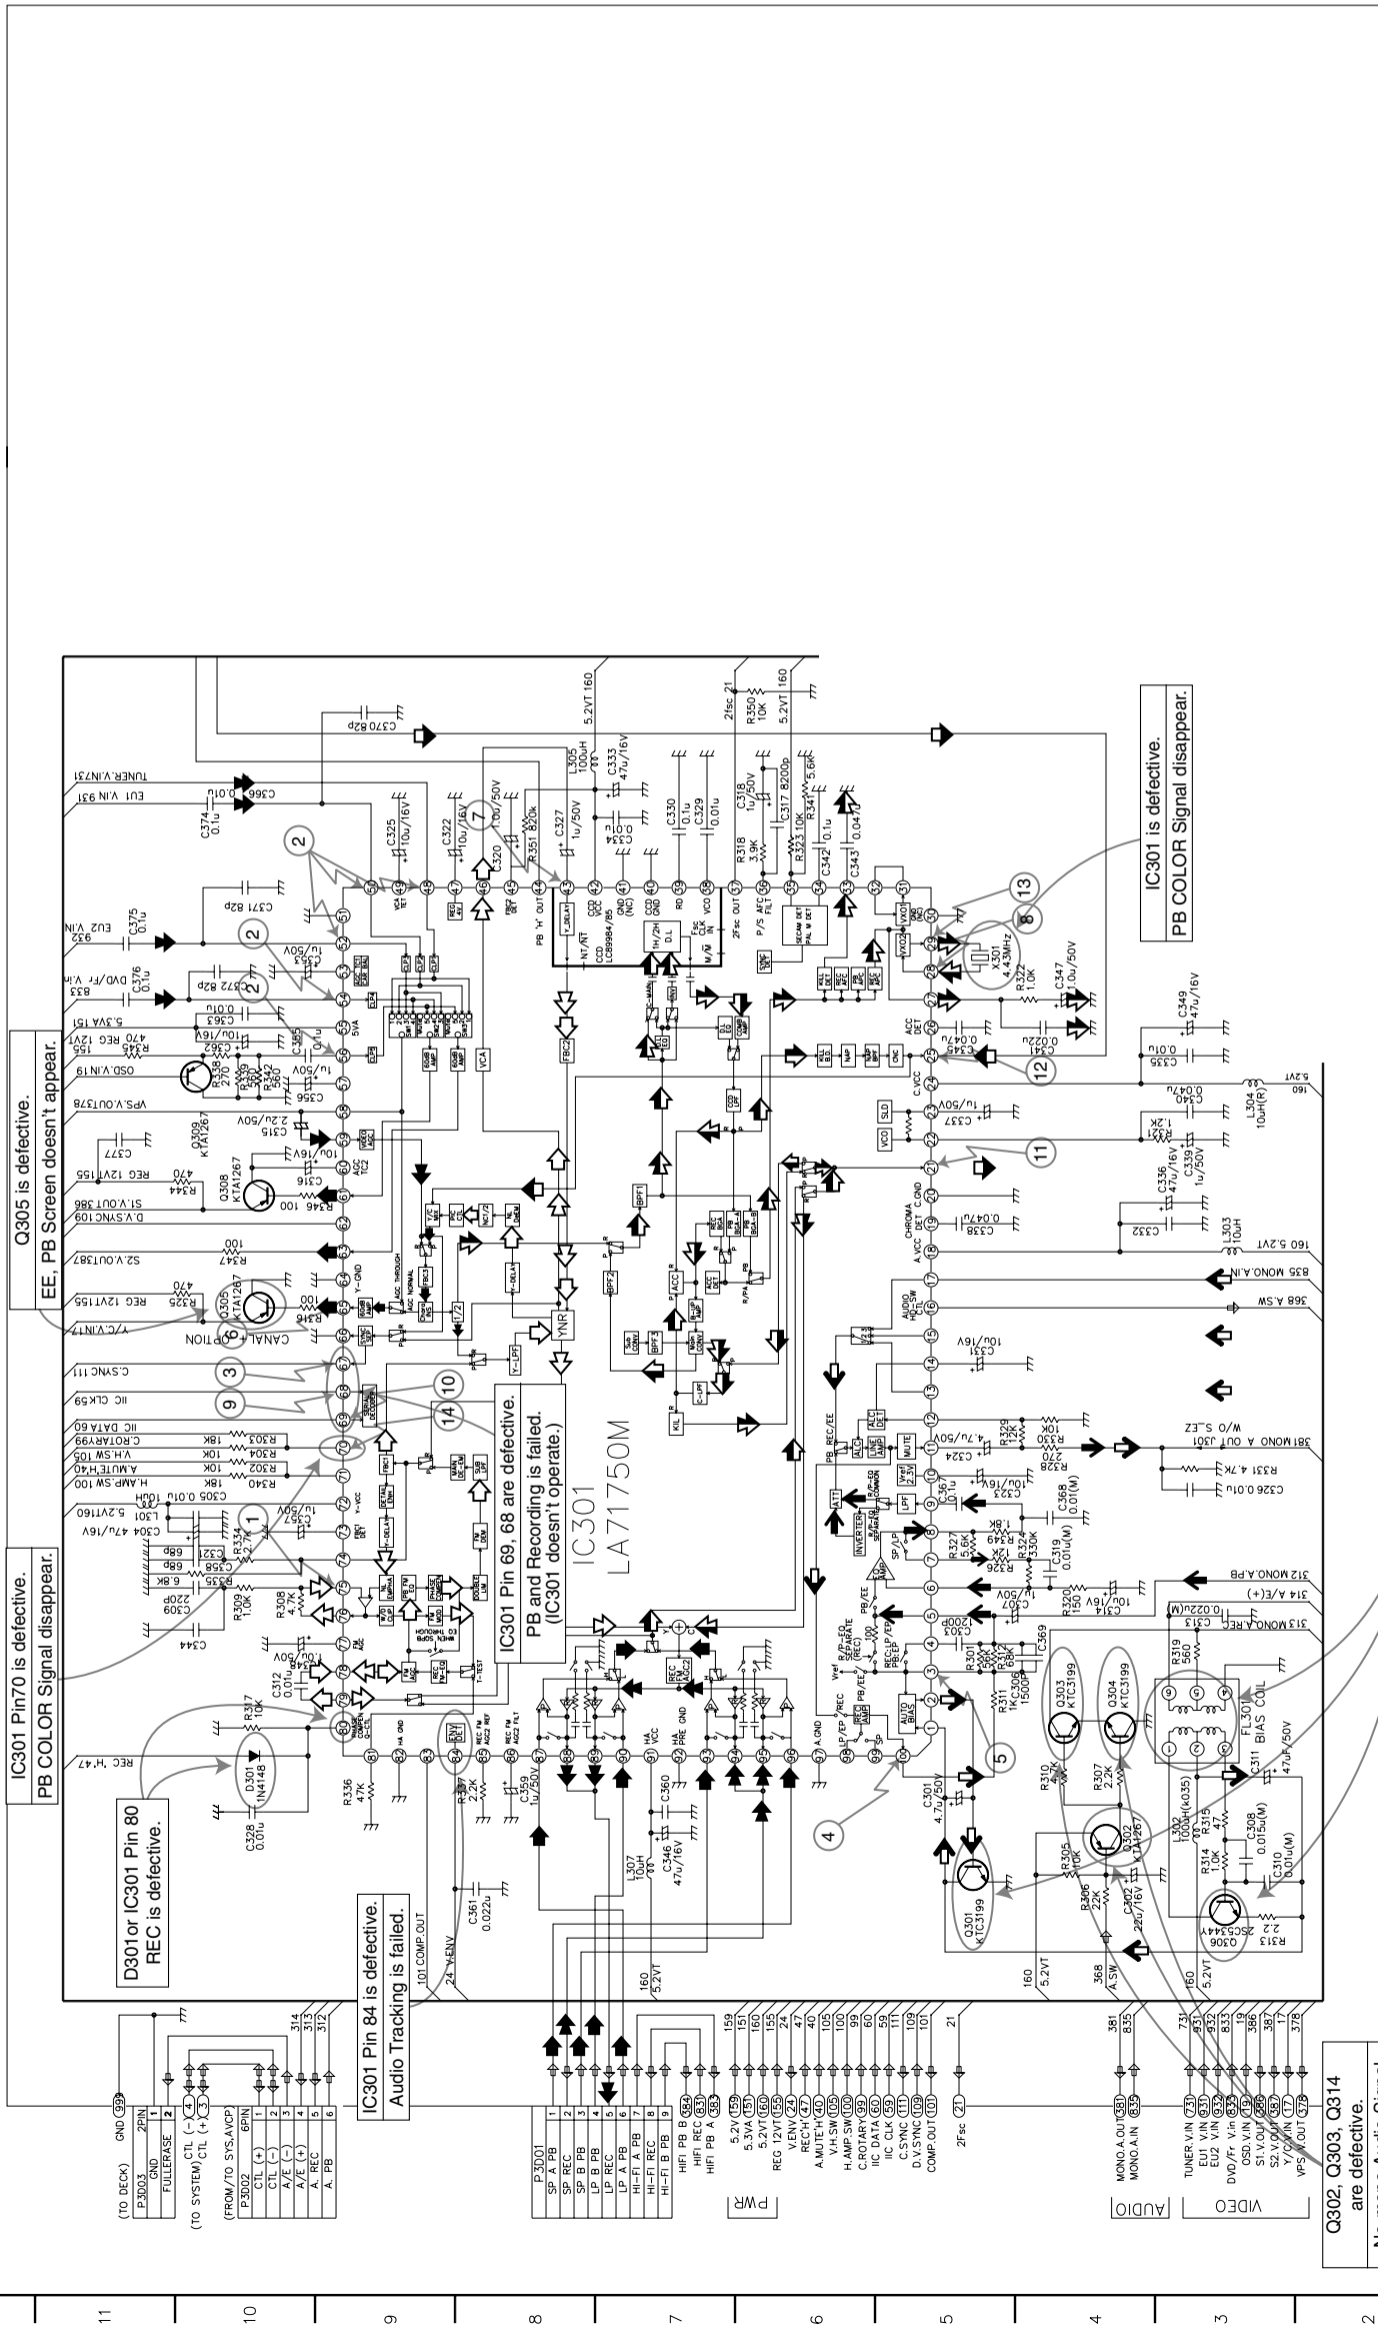

Q302, Q303, Q314 are defective.
 No mono Audio Signal in PB MODE.
 FL301, Q301, Q306 are defective.
 Normal Audio signal is not recorded.
 IC301 Pin70 is defective.
 PB COLOR Signal disappear.
 Q305 is defective.
 EE, PB Screen doesn't appear.
 IC301 or IC301 Pin 80 REC is defective.
 IC301 Pin 84 is defective.
 Audio Tracking is failed.
 IC301 Pin 69, 68 are defective.
 PB and Recording is failed.
 (IC301 doesn't operate.)
 IC301 LA71750M
 PB COLOR Signal disappear.
 IC301 is defective.
 PB COLOR Signal disappear.




A B C D E F G H I J K L M N O P


4. Hi-Fi CIRCUIT DIAGRAM

LOCATION GUIDE

106	B10	O803	K3
151	J2	O904	L3
155	B11	O905	L3
159	B10	R801	D6
25	B10	R802	I6
381	F2	R803	I7
384	B11	R804	I8
384	B10	R805	I9
386	K2	R806	I9
387	P5	R807	G10
40	P9	R808	E10
41	B2	R809	D10
581	B11	R810	D10
581	B6	R811	D10
583	B6	R812	D10
59	B10	R813	J3
60	B10	R815	E2
63	B2	R816	K5
64	B3	R821	G6
64	B3	R822	G6
71	P7	R823	G6
71	B9	R824	C6
782	B9	R825	M5
831	B11	R826	M5
833	P8	R835	O7
835	C2	R842	O8
844	P7	R843	O8
877	P7	R850	J9
891	P7	R851	J9
892	P5	R861	G4
893	P10	R862	G4
894	P5	R869	K4
895	P5	R870	L4
897	P6	R871	L4
898	P10	R875	C7
899	B11	R876	C7
91	B2	R877	K6
91	F2	R878	K5
931	F2	R890	M7
931	B3	R891	M7
931	B3	R892	L3
983	B3	R922	L3
984	B7	ZD801	F10
984	B7	ZD802	F10
985	B7		
986	B8		
987	B7		
987	B7		
988	B11		
989	D11		
990	D11		
991	D11		
992	C9		
993	C9		
994	D8		
995	D8		
996	D8		
997	D8		
998	D8		
999	D8		
1000	D8		
1001	D8		
1002	D8		
1003	D8		
1004	D8		
1005	D8		
1006	D8		
1007	D8		
1008	D8		
1009	D8		
1010	D8		
1011	D8		
1012	D8		
1013	D8		
1014	D8		
1015	D8		
1016	D8		
1017	D8		
1018	D8		
1019	D8		
1020	D8		

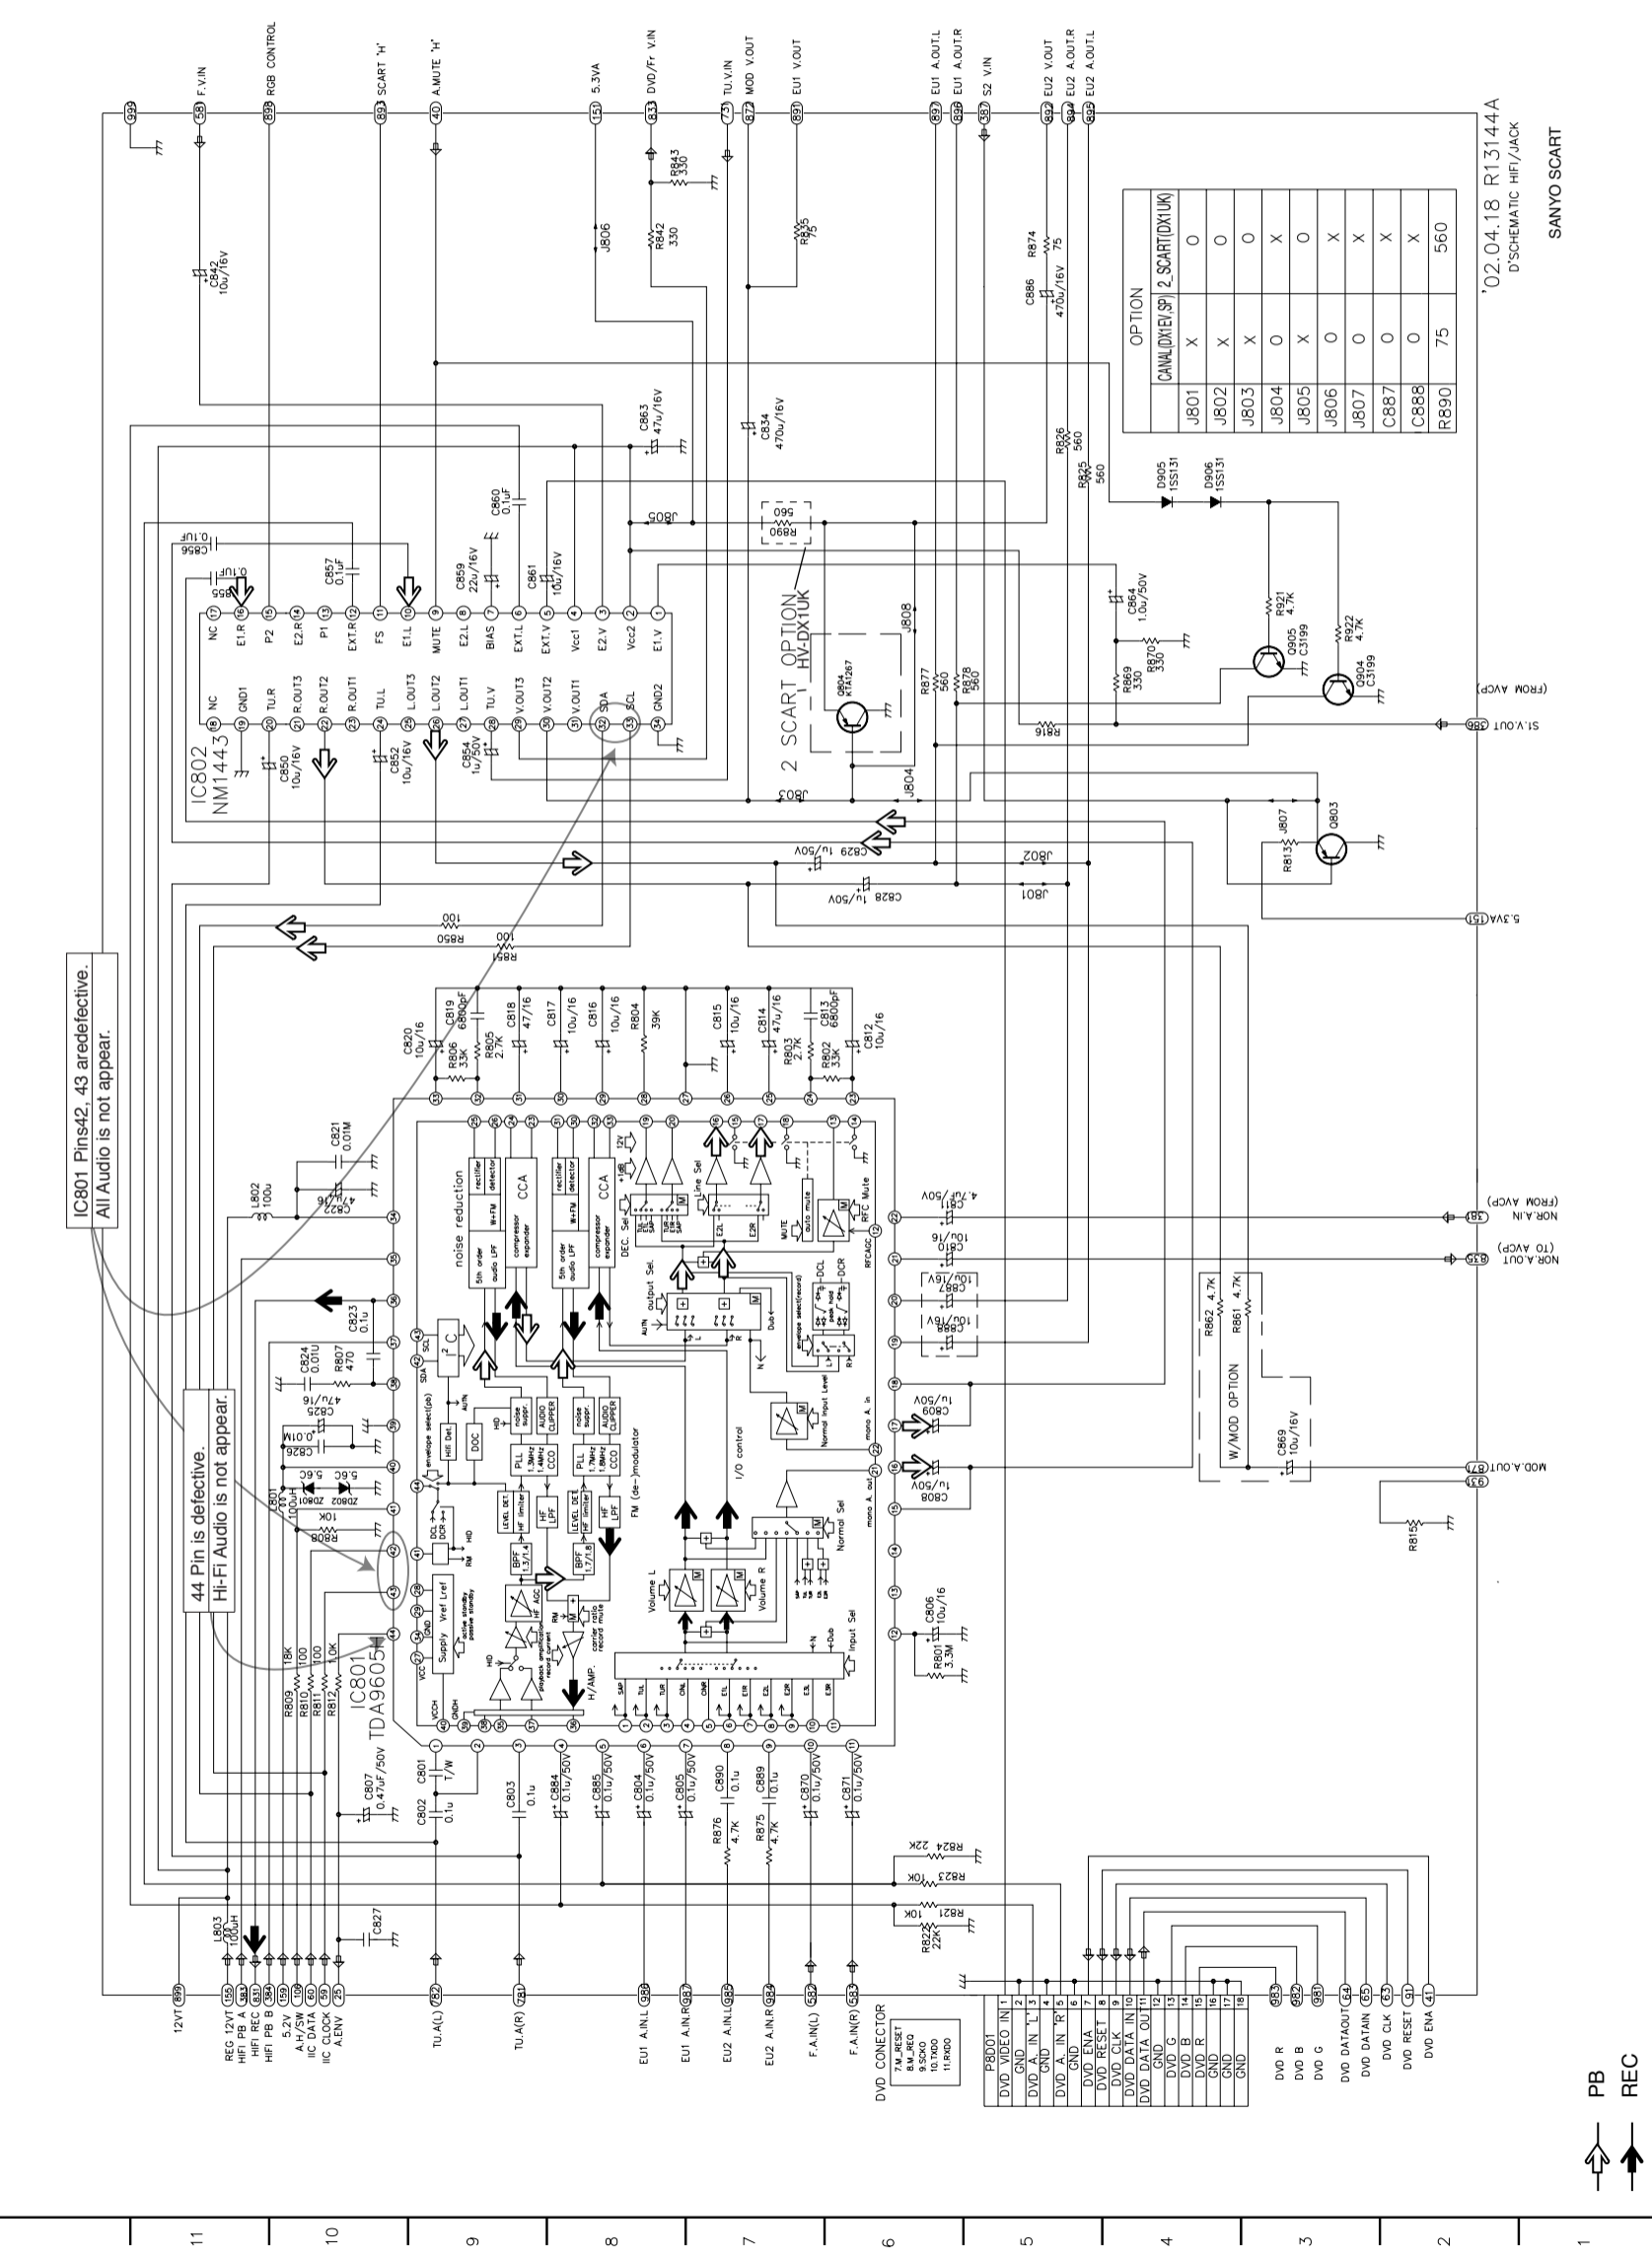

5. SCART(JACK) CIRCUIT DIAGRAM

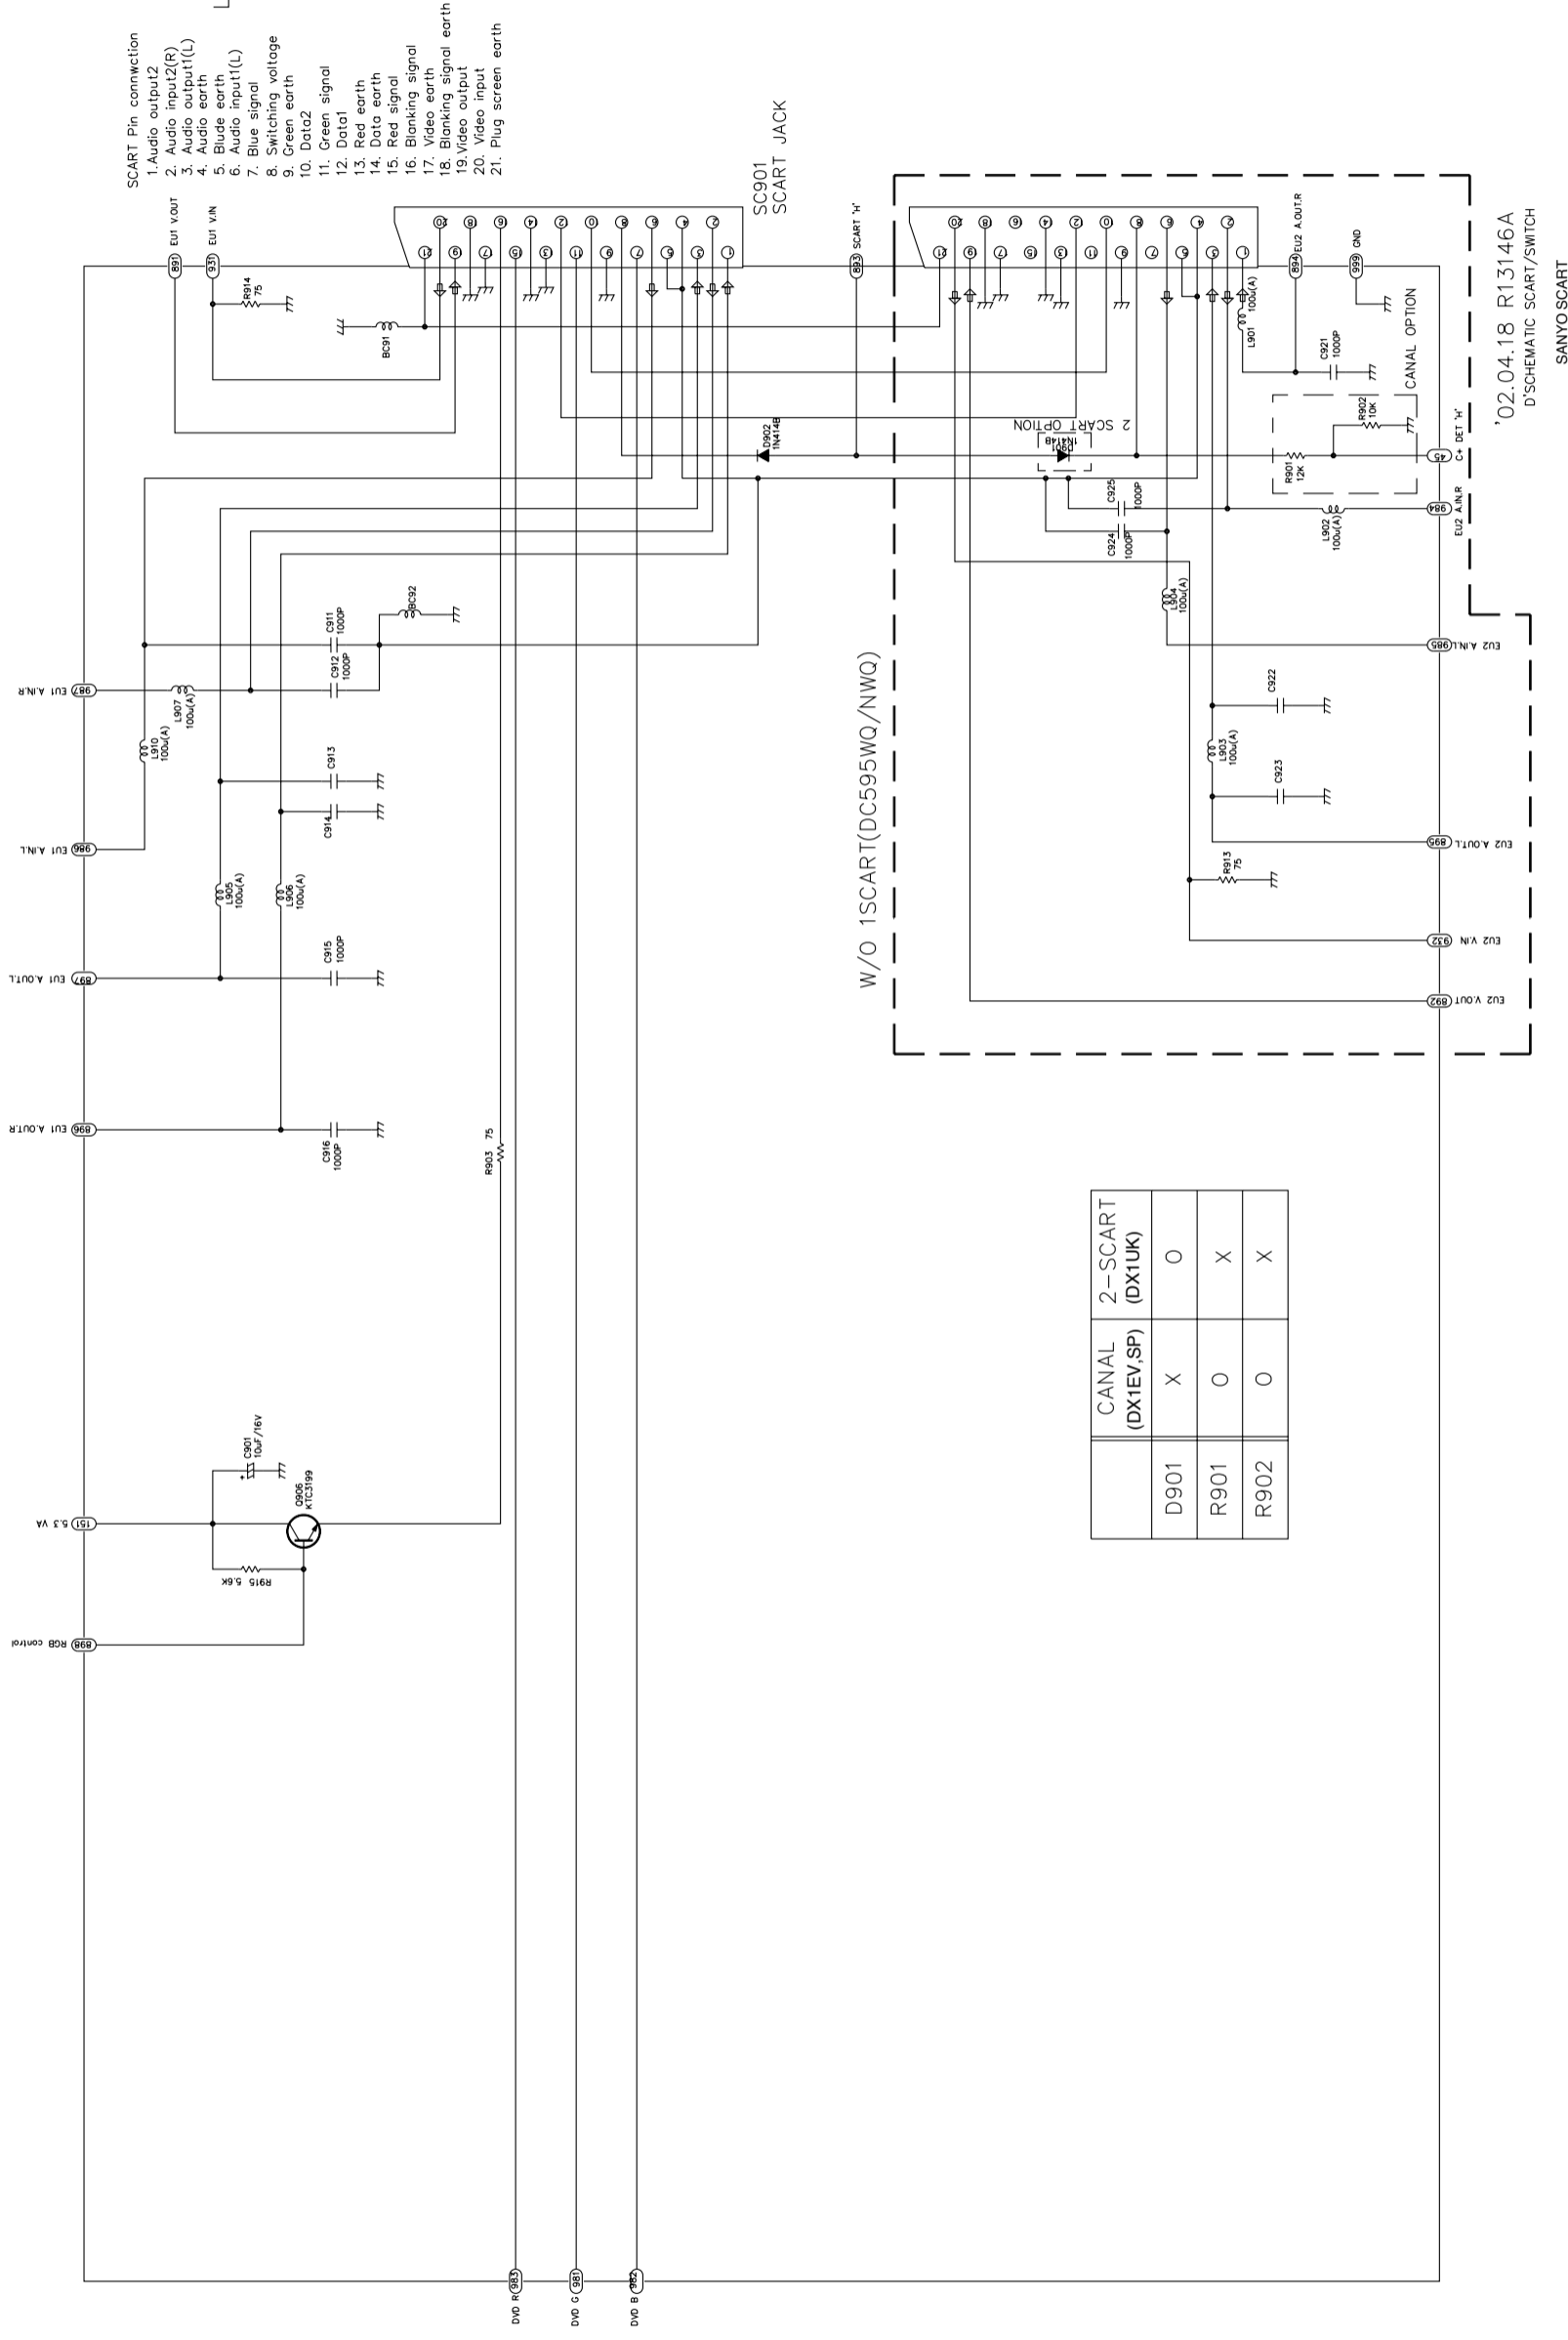

	CANAL (DX1EV,SP)	2-SCART (DX1UK)
D901	X	O
R901	O	X
R902	O	X

LOCATION GUIDE


151	G11
45	N2
891	O10
892	J2
893	O6
894	O3
895	K2
896	J11
897	F11
898	F11
931	O10
932	K2
981	BB
982	B7
983	BB
984	N2
985	M2
986	K11
987	L11
988	O2
989	O2
BC91	O9
BC92	M9
CS01	G10
CS11	W9
CS12	L9
CS13	L9
CS14	K9
CS15	K9
CS16	I9
C921	O3
C922	L3
C923	L3
C924	M4
C925	N4
D901	N4
D902	N6
L901	O3
L902	M3
L903	L3
L904	W10
L905	K9
L906	K9
L907	L10
L910	L10
O906	G9
R901	N3
R902	N2
R903	I8
R913	K3
R914	O10
R915	G10
SC901	P6

SCART Pin connection
 1. Audio output2
 2. Audio input2(R)
 3. Audio output(L)
 4. Audio earth
 5. Blude earth
 6. Audio input(L)
 7. Blue signal
 8. Switching voltage
 9. Green earth
 10. Data2
 11. Green signal
 12. Data1
 13. Red earth
 14. Data earth
 15. Red signal
 16. Blanking signal
 17. Video earth
 18. Blanking signal earth
 19. Video output
 20. Video input
 21. Plug screen earth

W/O 1SCART(DC595WQ/NWQ)

'02.04.18 R13146A
 D'SCHEMATIC SCART/SWITCH
 SANYO SCART

6. SYSTEM CIRCUIT DIAGRAM

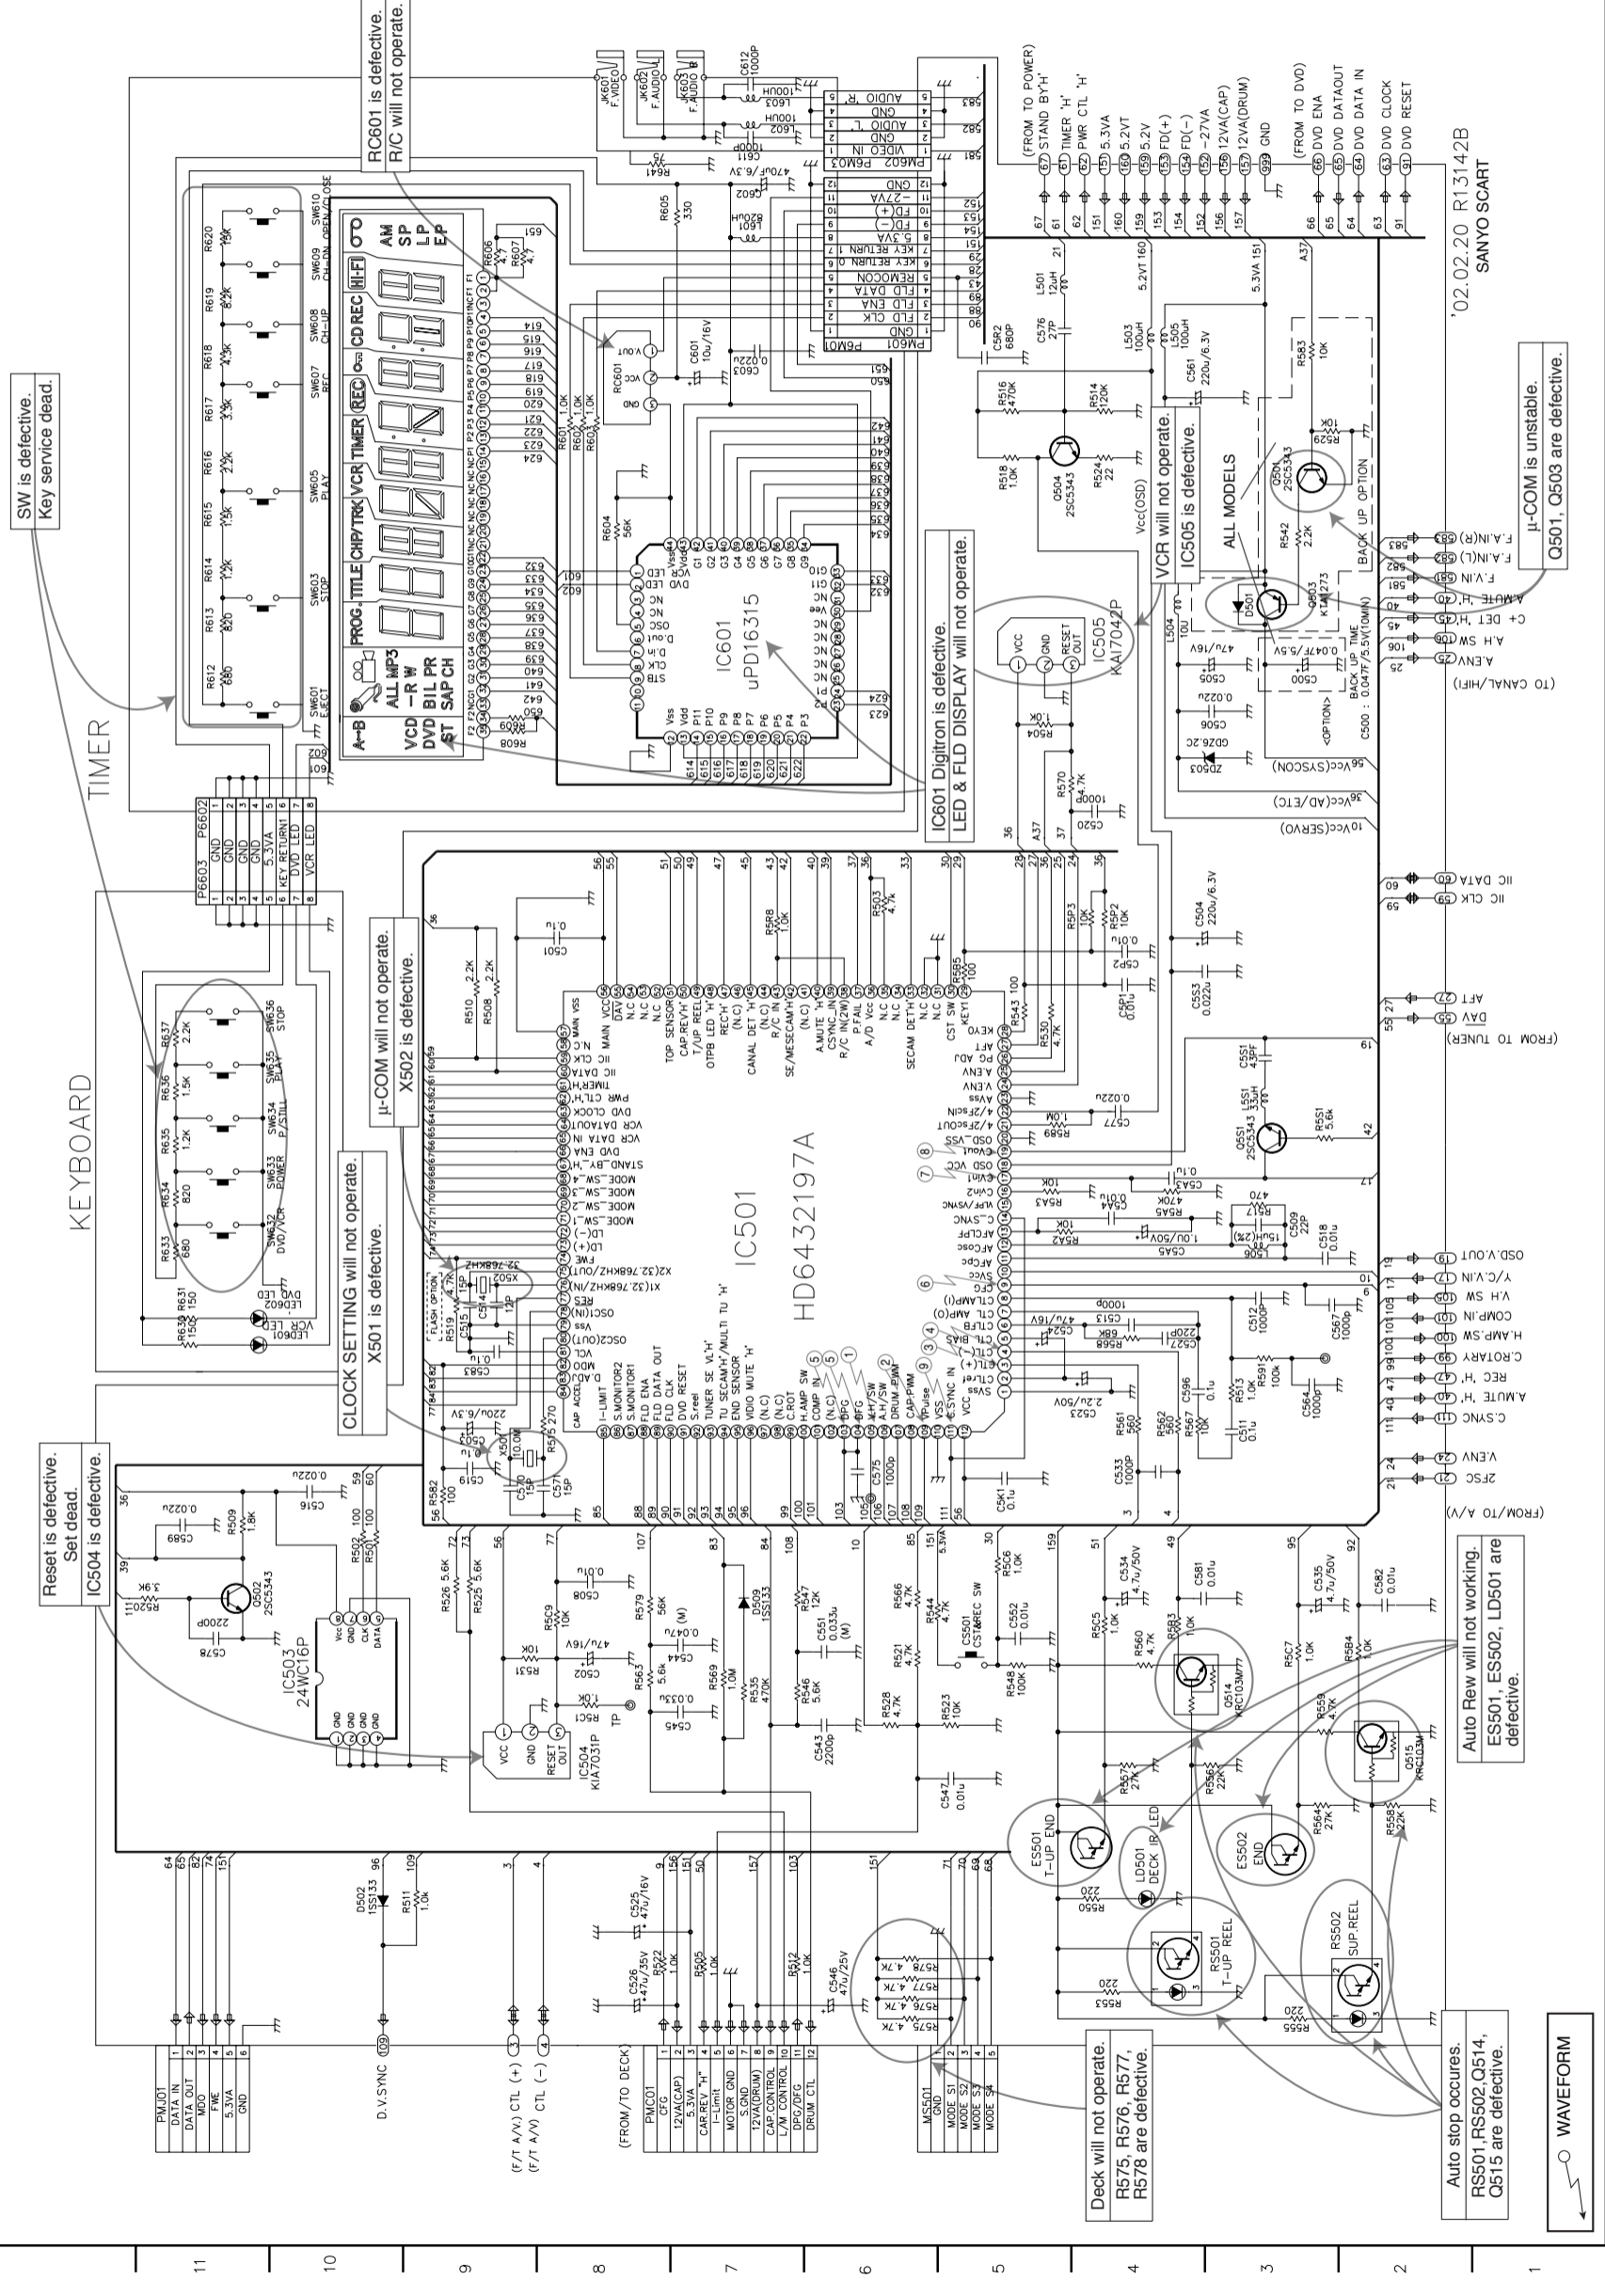

KEYBOARD

TIMER

LOCATION GUIDE

C500	L3	R501	L3	R637	H1
C501	L4	R502	L4	R638	H2
C502	L5	R503	L5	R639	H3
C503	L6	R504	L6	R640	H4
C504	L7	R505	L7	RS501	C3
C505	L8	R506	L8	RS502	C2
C506	L9	R507	L9	SW601	L10
C507	L10	R508	L10	SW602	L9
C508	L11	R509	L11	SW603	M10
C509	L12	R510	L12	SW604	N10
C510	L13	R511	L13	SW605	N9
C511	L14	R512	L14	SW606	O10
C512	L15	R513	L15	SW607	O9
C513	L16	R514	L16	SW610	P10
C514	L17	R515	L17	SW632	H10
C515	L18	R516	L18	SW633	H9
C516	L19	R517	L19	SW634	H10
C517	L20	R518	L20	SW635	H9
C518	L21	R519	L21	SW636	J10
C519	L22	R520	L22	X501	F9
C520	L23	R521	L23	X502	H9
C521	L24	R522	L24	ZD503	L3
C522	L25	R523	L25		
C523	L26	R524	L26		
C524	L27	R525	L27		
C525	L28	R526	L28		
C526	L29	R527	L29		
C527	L30	R528	L30		
C528	L31	R529	L31		
C529	L32	R530	L32		
C530	L33	R531	L33		
C531	L34	R532	L34		
C532	L35	R533	L35		
C533	L36	R534	L36		
C534	L37	R535	L37		
C535	L38	R536	L38		
C536	L39	R537	L39		
C537	L40	R538	L40		
C538	L41	R539	L41		
C539	L42	R540	L42		
C540	L43	R541	L43		
C541	L44	R542	L44		
C542	L45	R543	L45		
C543	L46	R544	L46		
C544	L47	R545	L47		
C545	L48	R546	L48		
C546	L49	R547	L49		
C547	L50	R548	L50		
C548	L51	R549	L51		
C549	L52	R550	L52		
C550	L53	R551	L53		
C551	L54	R552	L54		
C552	L55	R553	L55		
C553	L56	R554	L56		
C554	L57	R555	L57		
C555	L58	R556	L58		
C556	L59	R557	L59		
C557	L60	R558	L60		
C558	L61	R559	L61		
C559	L62	R560	L62		
C560	L63	R561	L63		
C561	L64	R562	L64		
C562	L65	R563	L65		
C563	L66	R564	L66		
C564	L67	R565	L67		
C565	L68	R566	L68		
C566	L69	R567	L69		
C567	L70	R568	L70		
C568	L71	R569	L71		
C569	L72	R570	L72		
C570	L73	R571	L73		
C571	L74	R572	L74		
C572	L75	R573	L75		
C573	L76	R574	L76		
C574	L77	R575	L77		
C575	L78	R576	L78		
C576	L79	R577	L79		
C577	L80	R578	L80		
C578	L81	R579	L81		
C579	L82	R580	L82		
C580	L83	R581	L83		
C581	L84	R582	L84		
C582	L85	R583	L85		
C583	L86	R584	L86		
C584	L87	R585	L87		
C585	L88	R586	L88		
C586	L89	R587	L89		
C587	L90	R588	L90		
C588	L91	R589	L91		
C589	L92	R590	L92		
C590	L93	R591	L93		
C591	L94	R592	L94		
C592	L95	R593	L95		
C593	L96	R594	L96		
C594	L97	R595	L97		
C595	L98	R596	L98		
C596	L99	R597	L99		
C597	L100	R598	L100		

SW is defective.
Key service dead.

IC601 is defective.
R/C will not operate.

IC505 is defective.
VCR will not operate.

IC501 is defective.
LED & FLD DISPLAY will not operate.

IC503 is defective.
Reset is defective.
Set dead.

µ-COM will not operate.
X502 is defective.

CLOCK SETTING will not operate.
X501 is defective.

Deck will not operate.
R575, R576, R577,
R578 are defective.

Auto stop occurs.
RS501, RS502, OS14,
OS15 are defective.


Auto Rew will not working.
ES501, ES502, LD501 are
defective.

µ-COM is unstable.
OS01, OS03 are defective.


WAVEFORM

WAVEFORM & VOLTAGE SHEET

★ IC301 Oscilloscope Waveform

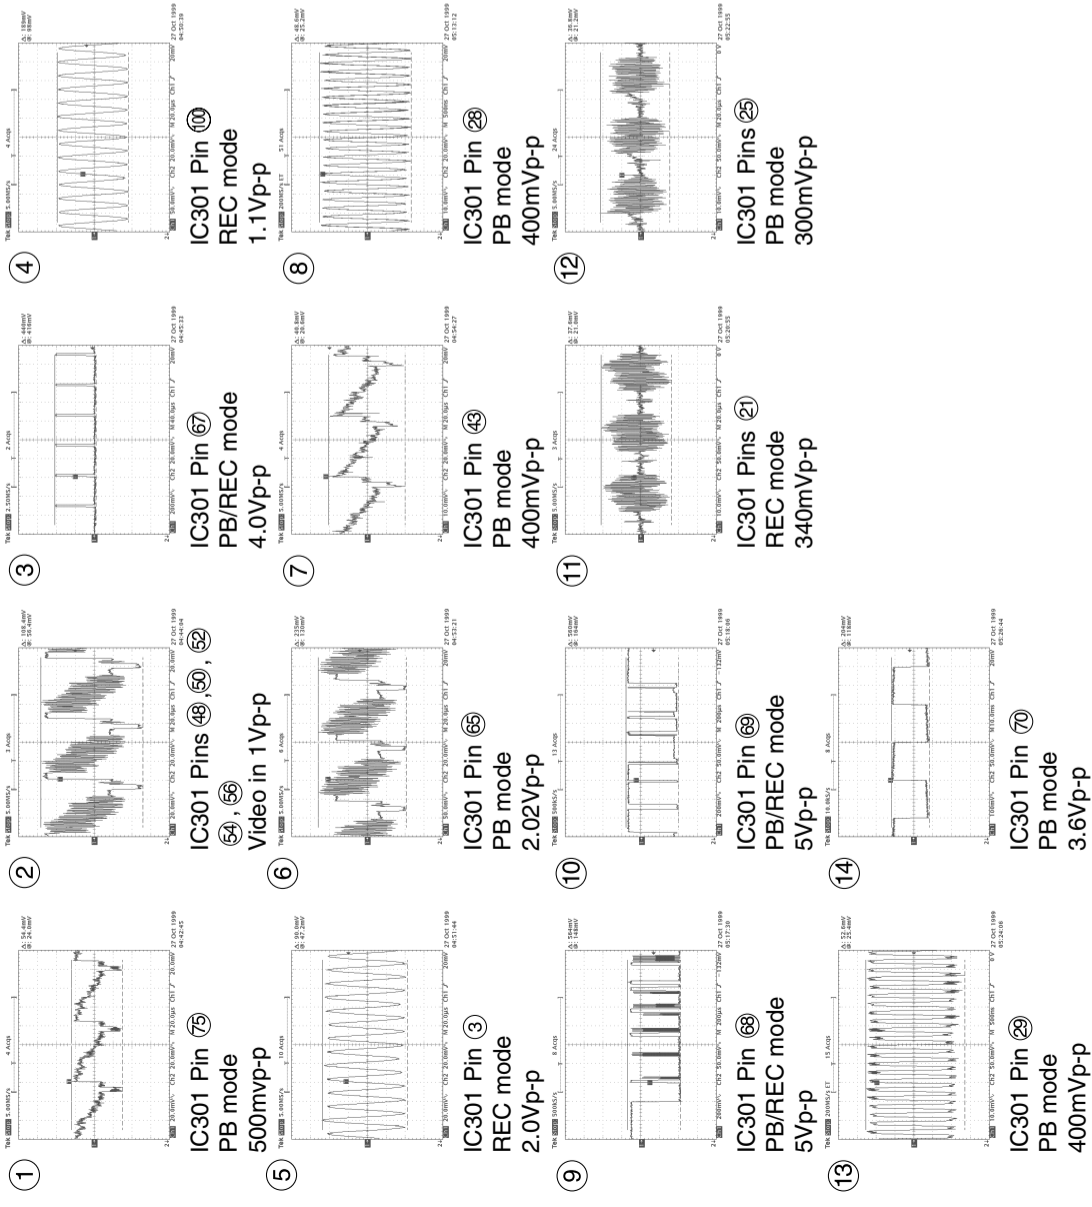

* IC501 Waveform Photographs

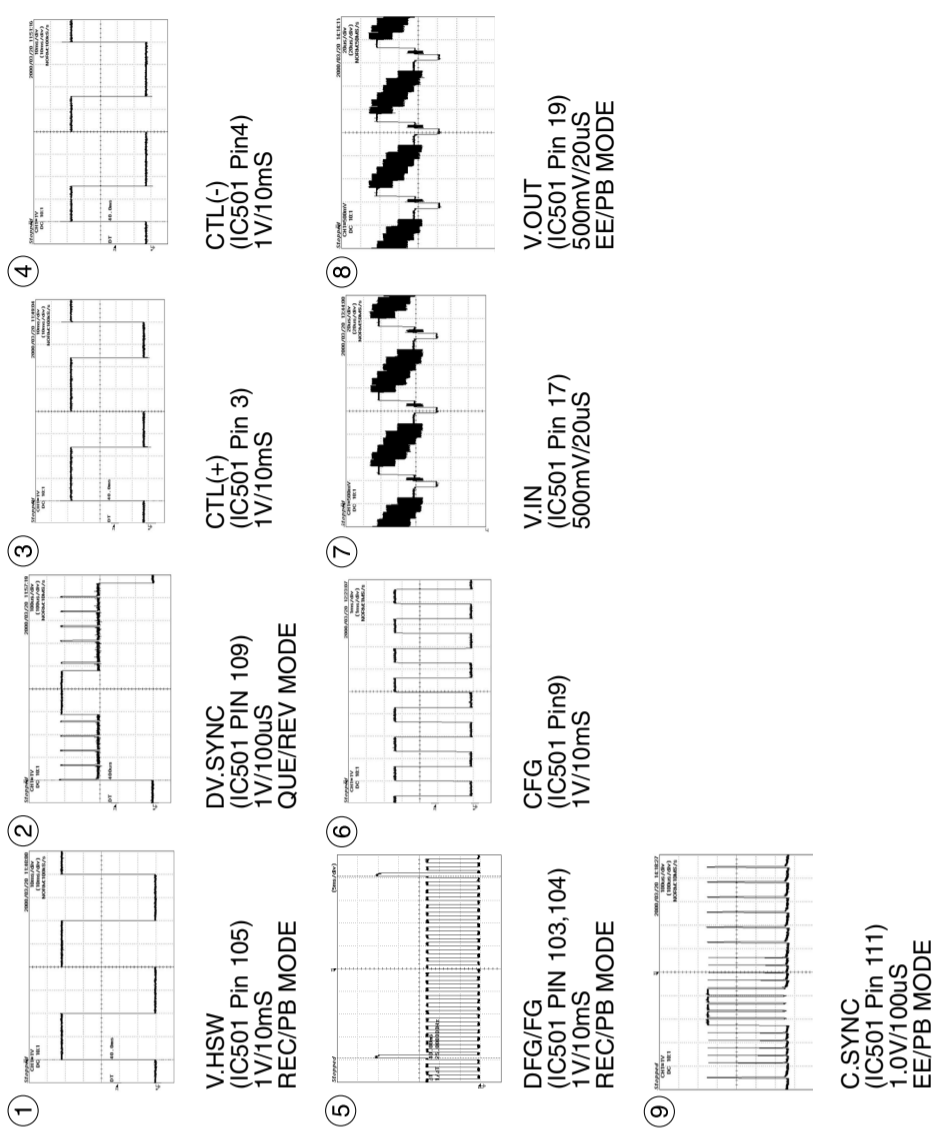

● CIRCUIT VOLTAGE CHART

MODE PIN NO.	EE	PB	REC
IC301			
1	4.9	4.9	1
2	0	0	0.8
3	2.2	2.2	2.3
4	pulse	pulse	0.6
5	2.1	2.1	2.3
6	2.2	2.1	2.2
7	2.1	2.1	2.2
8	2.1	2.1	2.2
9	2.1	2.1	2.9
10	2.2	2.1	2.2
11	2.2	2.2	2.2
12	0	0	0
13	2.1	2.1	2.2
14	0	0	1
15	2.1	2.1	2.2
16	4.9	0.1	4.8
17	2.1	2.1	2.2
18	4.9	4.9	4.9
19	4.0	3.8	2.8
20	0	0	0
21	3.1	1.8	2
22	2.7	2.6	3.4
23	2.7	2.6	3.4
24	4.9	4.9	4.9
25	0.1	3.3	0.12
26	1.5	2.2	1.2
27	2	2.0	2
28	4	4	4
29	2.6	2.6	2.6
30	0	0	0
31	4.5	4.4	4.5
32	4.4	4.4	4.5
33	2.9	2	1.9
34	0	0	1.8
35	1.8	1.8	1.8
36	2.9	3.5	3.6
37	1.8	1.8	1.8
38	2	2	2
39	9	9	9
40	0	0	0
41	0	0	0
42	4.9	4.9	4.9
43	2.4	2.2	2.3
44	0	3.9	2.8
45	2.4	2.4	2.5
46	2.6	2.5	2.6
47	4	4	4
48	4.2	4.2	4.2
49	2.9	3.6	3
50	1.9	1.9	1.95
51	0	0	0
52	1.9	1.9	1.95
53	2.3	2.2	2.3
54	1.9	1.9	2.2

MODE PIN NO.	EE	PB	REC
IC501			
1	0	0	0
2	2.6	2.6	2.6
3	2.6	2.6	3.5
4	2.6	2.6	1.3
5	2.6	2.6	2.6
6	2.6	2.6	2.6
7	2.7	2.7	2.7
8	2.58	2.5	2.5

MODE PIN NO.	EE	PB	REC
9	4.52	2.2	2.2
10	5.2	5.2	5.2
11	1.8	1.8	1.7
12	1.8	1.8	0
13	2.0	2.1	2
14	0.26	3.9	0.4
15	0.27	pulse	0.16
16	1.9	1.9	1.8
17	2.47	1.4	2.4
18	4.93	0	4.8
19	2.26	0	1.7
20	0	0	0
21	2.3	0	2.3
22	2.3	2.3	2.2
23	0	0	0
24	0.52	2.6	0
25	0.078	3.1	0.16
26	5.2	0	5.2
27	4.5	4.5	4.5
28	0	5.2	5.2
29	0	0	0
30	0	0	0
31	0	0	0
32	0	0	0
33	0.18	0.18	0.16
34	0.26	0	0.16
35	5.2	5.2	5.2
36	5.2	5.2	5.2
37	4.8	0	0
38	4.8	4.8	4.8
39	0.21	0	2.3
40	5.18	0	0
41	3.1	0	0
42	0	0	0
43	0	4.8	4.8
44	0	0	0
45	0	0	0
46	0	0	0
47	0	0	5.1
48	0	0	0
49	0	pulse	0
50	0	0	0.1
51	0	0	0.1
52	pulse	0	0.26
53	pulse	0	0.26
54	5.2	0	5.1
55	pulse	0	0
56	5.2	5.2	0
57	0	0	0
58	0	0	0
59	4.9	0	0
60	4.7	0	4.7
61	5.1	5.1	5.1
62	5.1	0.2	5.1
63	5	5	5

MODE PIN NO.	EE	PB	REC
64	3.58	3.5	3.6
65	2.8	pulse	0
66	5.1	5.1	0.2
67	0	0	5.1
68	0	5.2	0
69	0	5.2	5.2
70	5.2	5.2	5.2
71	5.2	0	5.2
72	0	0	0
73	0.3	5.1	5.1
74	0	0	0
75	0	0	1.6
76	1.36	1.3	1.3
77	0	0	0
78	0	0	2.5
79	0	0	0
80	0	0.15	0
81	3.3	3.3	3.3
82	5.2	5.2	0
83	0	2.5	2.5
84	0	2.7	2.7
85	0	3.5	3.6
86	pulse	pulse	2.8
87	0	pulse	3.1
88	4.8	4.8	4.8
89	0	0	0
90	0	4.9	0
91	4.95	0	0
92	0	0	pulse
93	0	0	0
94	0	0	0
95	0	0	0
96	0	0	0
97	0	0	0
98	0	5.1	5.2
99	0	2.5	2.6
100	0	0	0
101	0	0	0.29
102	0	0	0
103	0	1.4	1.38
104	0	pulse	1.39
105	0	2.5	2.6
106	0	2.5	2.6
107	0	0	0
108	0	0	2.7
109	pulse	0	0
110	pulse	0	0
111	0.26	0	0
112	5.2	0	0
IC751			
1	5.1	5.1	5.1
2	1.5	1.5	1.5
3	1.5	1.5	1.5
4	0	0	0
5	2.4	2.4	2.4

MODE PIN NO.	EE	PB	REC
6	2.3	2.3	2.3
7	0.2	pulse	pulse
8	0	0	pulse
9	0	0	pulse
10	0	0	0
11	5.1	5.1	5.1
12	4.8	4.8	4.8
13	4.7	4.7	4.8
14	2.5	2.5	pulse
15	2.5	2.5	pulse
16	0	0	pulse
17	pulse	pulse	pulse
18	0.23	pulse	pulse
19	5.14	5.1	5.1
20	0	0	0
21	pulse	pulse	pulse
22	5.1	5.1	5.1
23	0	0	0
24	0	0	0
25	0	0	0
26	0	0	0
27	0	0	0
28	0	0	0
29	0	0	0
30	2.8	2.8	2.8
31	2.8	2.8	2.8
32	0	0	0
33	5.1	5.1	5.1
34	4.2	4.2	4.2
35	0	0	0
36	2.8	2.8	2.8
37	0	0	0
38	0	0	0
39	0	0	0
40	5	5	5
41	0	0.9	0.9
42	4.7	4.7	4.8
43	4.8	4.6	4.8
44	0	3.3	0.7
IC801			
1	3.8	3.8	3.8
2	3.8	3.8	3.8
3	3.8	3.8	3.8
4	3.8	3.8	3.8
5	3.8	3.8	3.8
6	3.8	3.8	3.8
7	3.8	3.8	3.8
8	3.8	3.8	3.8
9	3.8	3.8	3.8
10	3.8	3.8	3.8
11	3.8	3.8	3.8
12	0	0	0
13	3.87	3.87	3.8
14	0	0	0
15	0	0	0

MODE PIN NO.	EE	PB	REC
16	6	6	6
17	6	6	6
18	0	0	0
19	6	6	6
20	6	6	6
21	4.57	4.5	4.5
22	3.82	3.8	3.8
23	3.86	3.8	3.8
24	3.87	3.8	3.8
25	3.87	3.8	3.8
26	0.8	0.8	0.8
27	0	0	0
28	3.84	3.8	3.8
29	3.86	3.8	3.8
30	0.79	0.7	0.8
31	3.87	3.8	3.9
32	3.87	3.8	3.9
33	3.86	3.8	3.9
34	12	12	12
35	0.6	0.6	4.2
36	0.63	0.6	4.2
37	0.63	0.6	4.2
38	0	0	4.2
39	0	0	0
40	5	5	5
41	0	0.9	0.9
42	4.7	4.7	4.8
43	4.8	4.6	4.8
44	0	3.3	0.7
IC802			
1	3	3.1	2.9
2	12	12	12
3	2.7	2.7	2.7
4	12	12	12
5	2.9	2.9	3
6	5.7	5.7	5.7
7	5.7	5.7	5.7
8	0	5.6	5.7
9	5.1	0	0
10	5.6	5.6	5.7
11	11.4	11.4	11.5
12	5.7	5.7	5.7
13	0	0	1.6
14	5.6	5.6	2.7
15	0.1	0.1	5.7
16	5.6	5.6	0
17	0	0	0
18	0	0	0
19	0	0	5.7
20	5.7	5.7	5.7
21	5.7	5.7	5.7
22	5.7	5.7	5.7
23	5.6	5.6	5.7
24	5.7	5.7	5.7
25	5.7	5.7	5.7


MODE PIN NO.	EE	PB	REC
26	5.7	5.7	5.7
27	5.6	5.6	5.2
28	5.2	5.2	2.3
29	1.4	1.4	1.8
30	2.1	2.3	3.5
31	3.5	3.5	3.5
32	4.7	4.7	4.8
33	4.8	4.8	4.9
34	0	0	0

Transistor	EE Mode			PB Mode			REC Mode		
	E	C	B	E	C	B	E	C	B
Q110	-22	-22	-21	-21.8	-21.8	-21	-22	-22	-21
Q111	5.23	5.1	0	5.24	5.1	0	5.23	5	0
Q112	12.1	13.9	12.7	12	13.5	12.7	12.1	13.4	12.7
Q113	5.24	5.18	4.46	5.24	5.18	4.46	5.24	5.17	4.47
Q114	33.6	33.5	32.8	33.4	33.2	32.4	33.5	33.3	32.5
Q115	0	0	0.74	0	0	0.74	0	0	0.74
Q116	5.24	5.2	4.48	5.2	5.2	4.49	5.2	5.2	4.48
Q117	5	5.23	5.7	5	5.24	5.7	5	5.2	5.7
Q118	0	0	0.68	0	0	0.67	0	0	0.68
Q301	0	4.9	0	0	4.9	0	0	1.6	0.8
Q302	4.9	0	4.9	4.9	4.86	4.25	4.9	-14.4	4.9
Q303	0.2	0	0	0	0	0.7	-7.8	0	-14.3
Q304	0.13	0	-0.13	0	0	0.7	-7.8	0	-14.3
Q305	2.5	0	1.8	2.7	0	2	3	0	2.3
Q306	4.9	4.9	4.9	4.9	4.9	4.9	1.9	4.6	2.2
Q308	2.6	0	1.9	2.8	0	2.1	3	0	2.4
Q309	2.9	0	2.3	3.2	0	2.5	3.5	0	2.8
Q501	0	0	0.68	0	0	0.68	0	0	0.67
Q502	0	3.7	0.23	0	2.4	0.23	0	2.4	0.2
Q503	5.2	5.2	4.5	5.23	5.2	4.5	5.2	5.2	4.5
Q504	0	3.8	0.62	0	3.8	0.6	0	3.7	0.6
Q514	0	5.2	0	0	Pulse	Pulse	0	Pulse	Pulse
Q515	0	0	4.95	0	Pulse	Pulse	0	Pulse	Pulse
Q551	0.36	2.52	0	0	2.5	0	0.5	3	0
Q751	0	3.8	0	0	3.8	0	0	3.7	0
Q804	2.6	0	1.9	2.8	0	2	3.1	0	2.4

2. KEY P.C.BOARD

LOCATION GUIDE

C611	F7
C612	E8
JK601	G8
JK602	F8
JK603	F8
L602	F7
L603	E7
LED601	D8
LED602	D8
P6603	B8
RG30	C8
RG31	C8
RG33	C8
RG34	D8
RG41	G7
SW631	B8
SW632	C8
SW633	D8

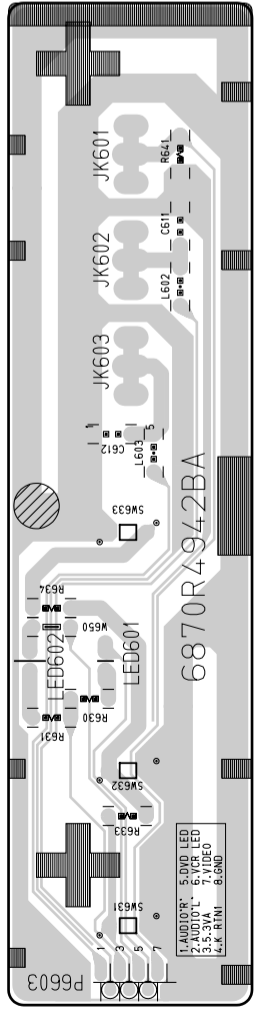

A | B | C | D | E | F | G |

9


8

7

3. CLOCK P.C.BOARD

LOCATION GUIDE

C601	H2
C602	G2
C603	J2
C604	C3
C606	F2
DG601	K3
L601	F2
P6602	N3
P6M01	C2
P6M03	D2
R601	J3
R602	J3
R603	I3
R604	J3
R605	F2
R606	I2
R607	I2
R608	M3
R609	M3
R612	A2
R613	B3
R614	B3
R615	E3
R616	E3
R617	F3
R618	F3
R619	F3
R620	F3
RC601	H3
SW601	A4
SW602	A2
SW603	B2
SW604	C2
SW605	C2
SW606	D2
SW607	F2
SW608	G2
SW609	G2
SW610	M4

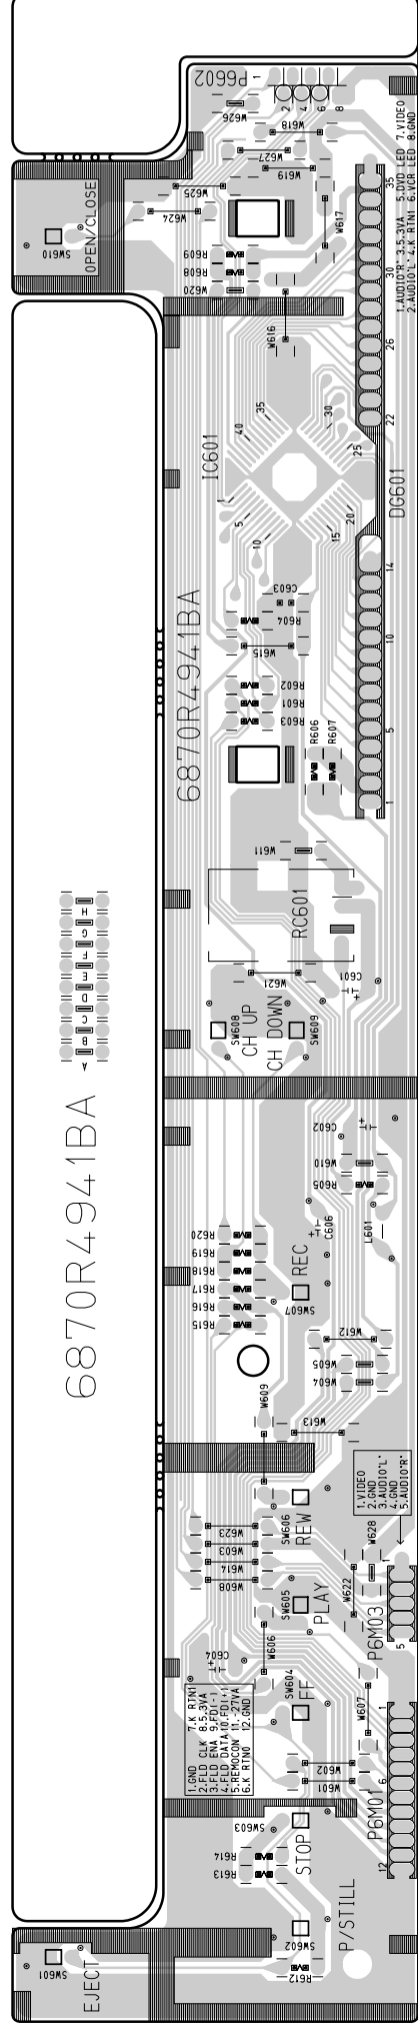

A | B | C | D | E | F | G | H | I | J | K | L | M | N

4

3

2


1

DVD PART


ELECTRICAL TROUBLESHOOTING GUIDE

1. μ -COM Circuit


A. No Power

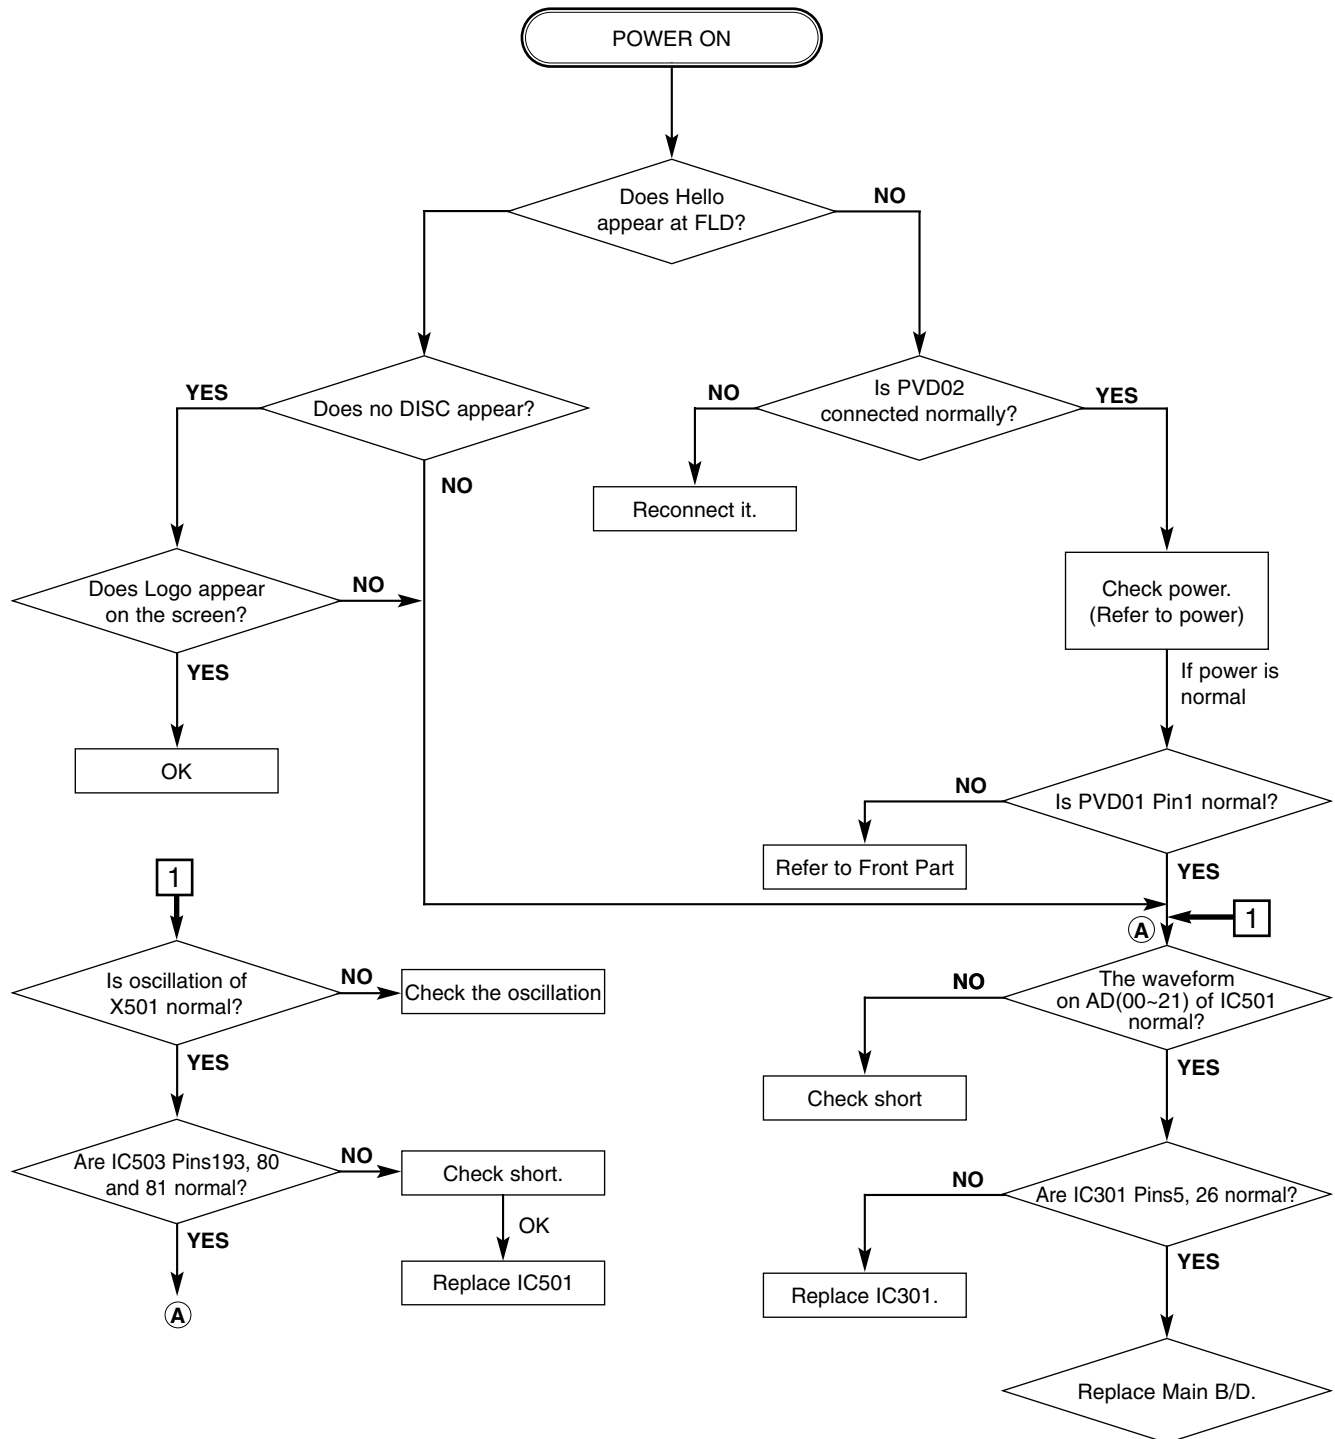


B. Audio abnormal

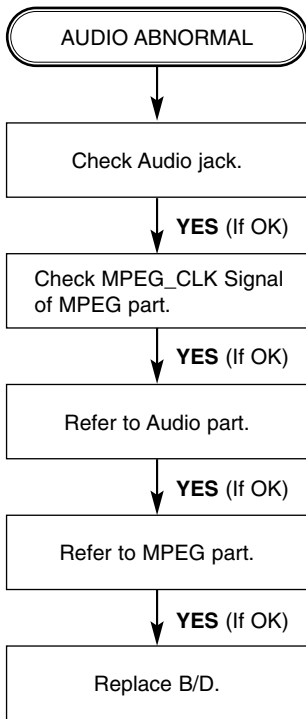


C. Video abnormal

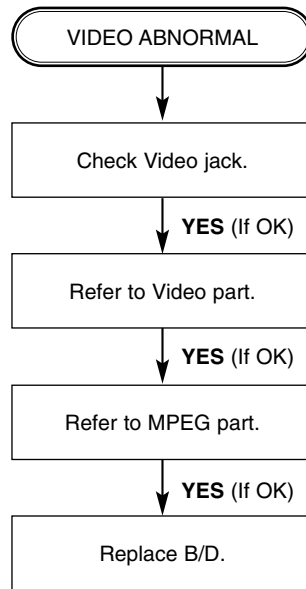


D. Open/Close abnormal

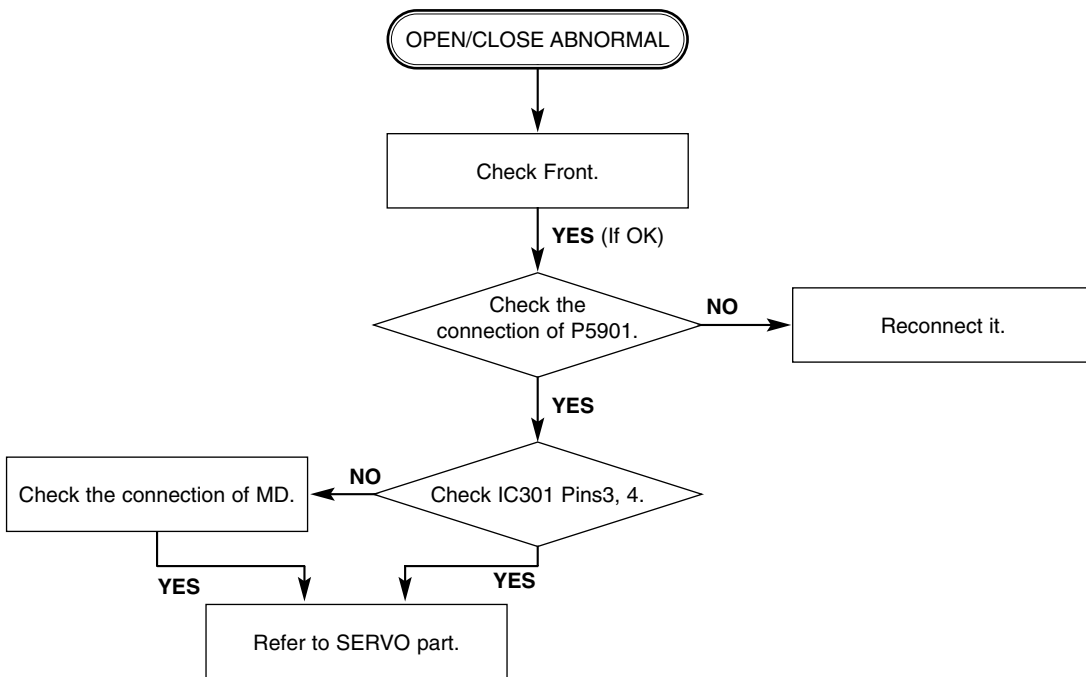


E. Picture abnormal

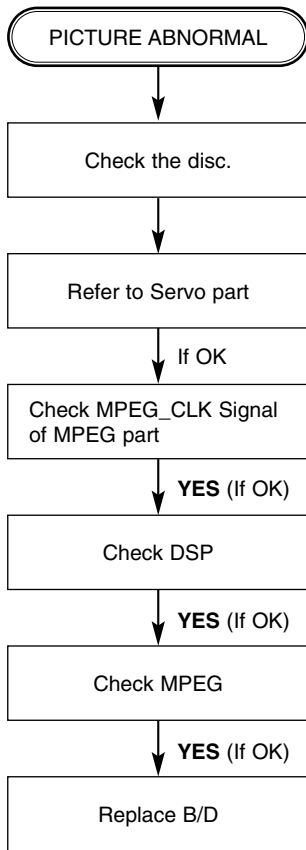

F. Disc Error

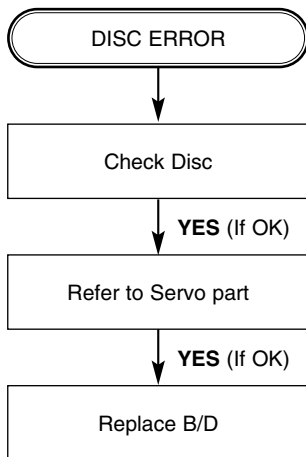


2. MPEG Circuit

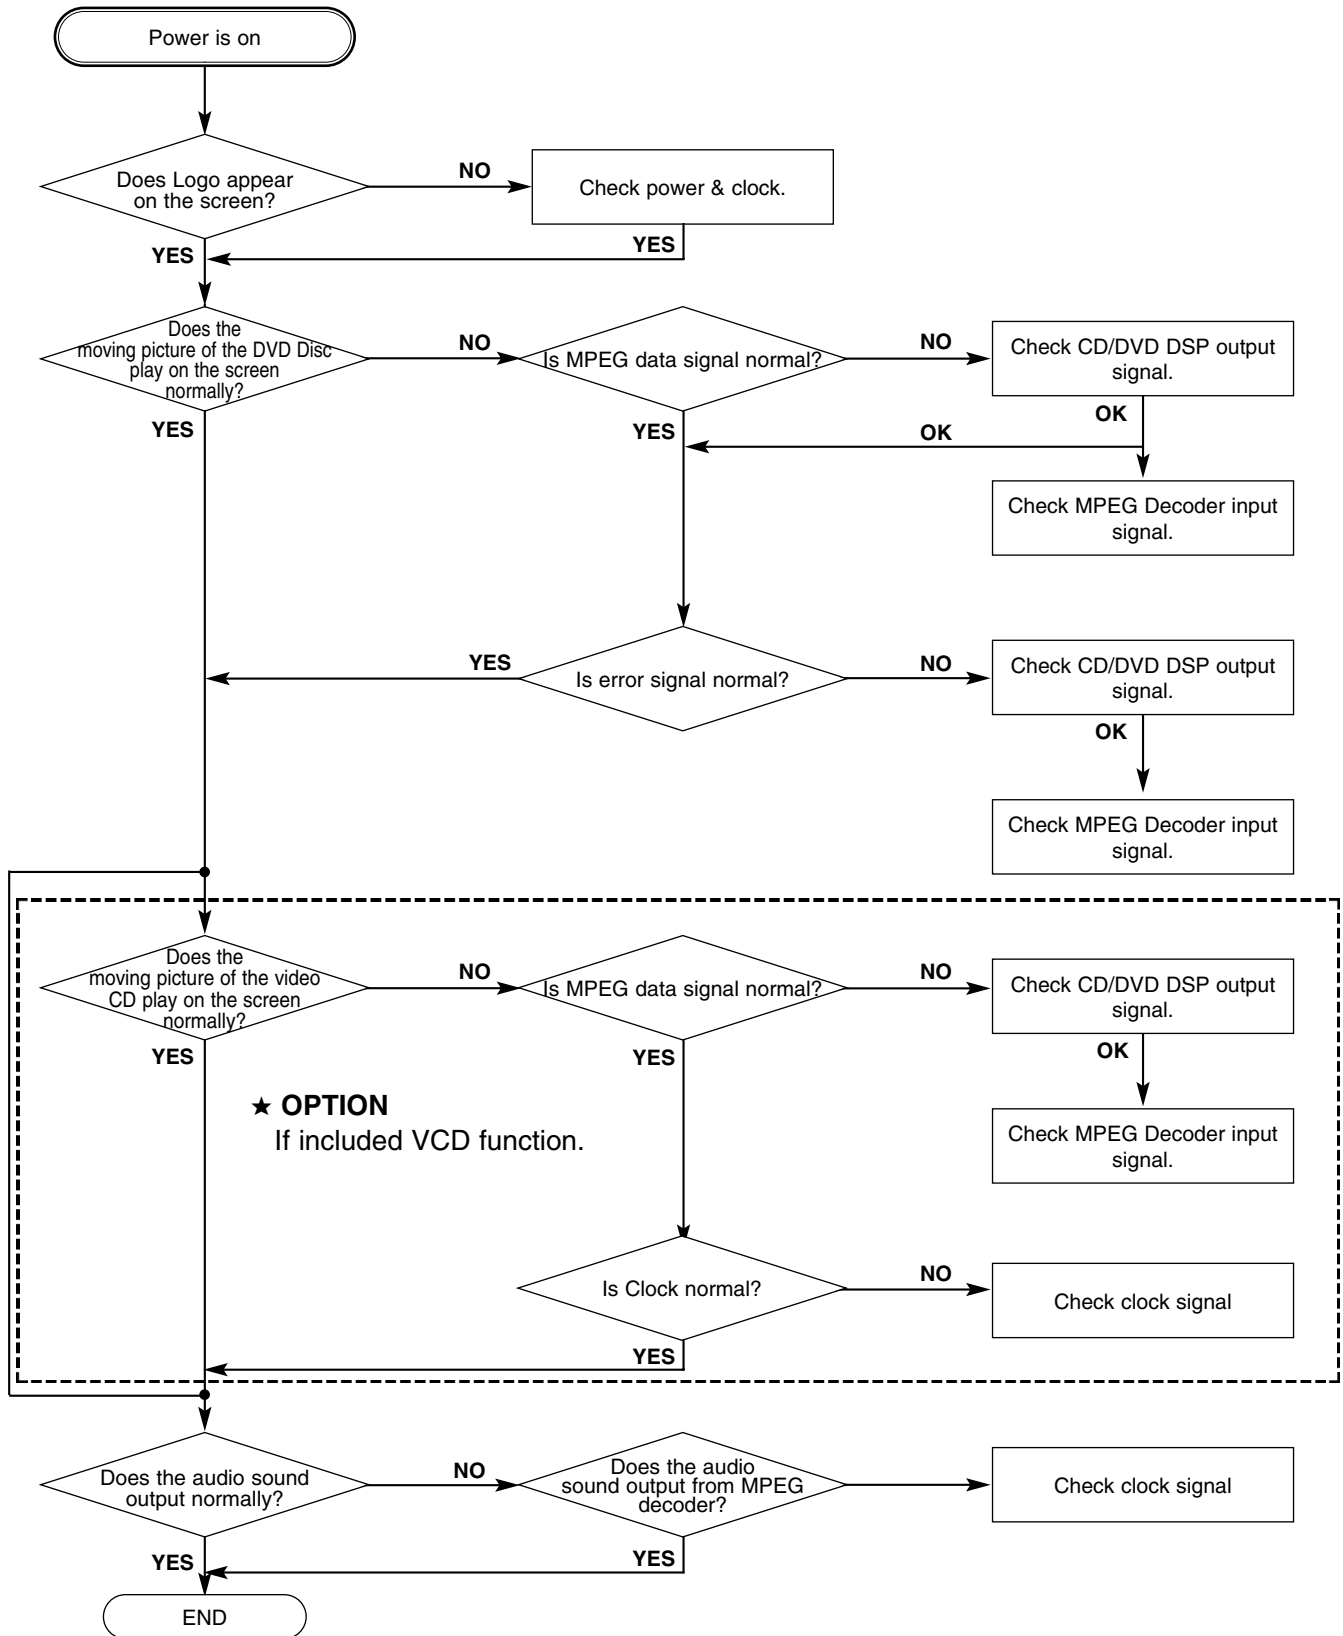


3. RF/Servo Circuit


A.

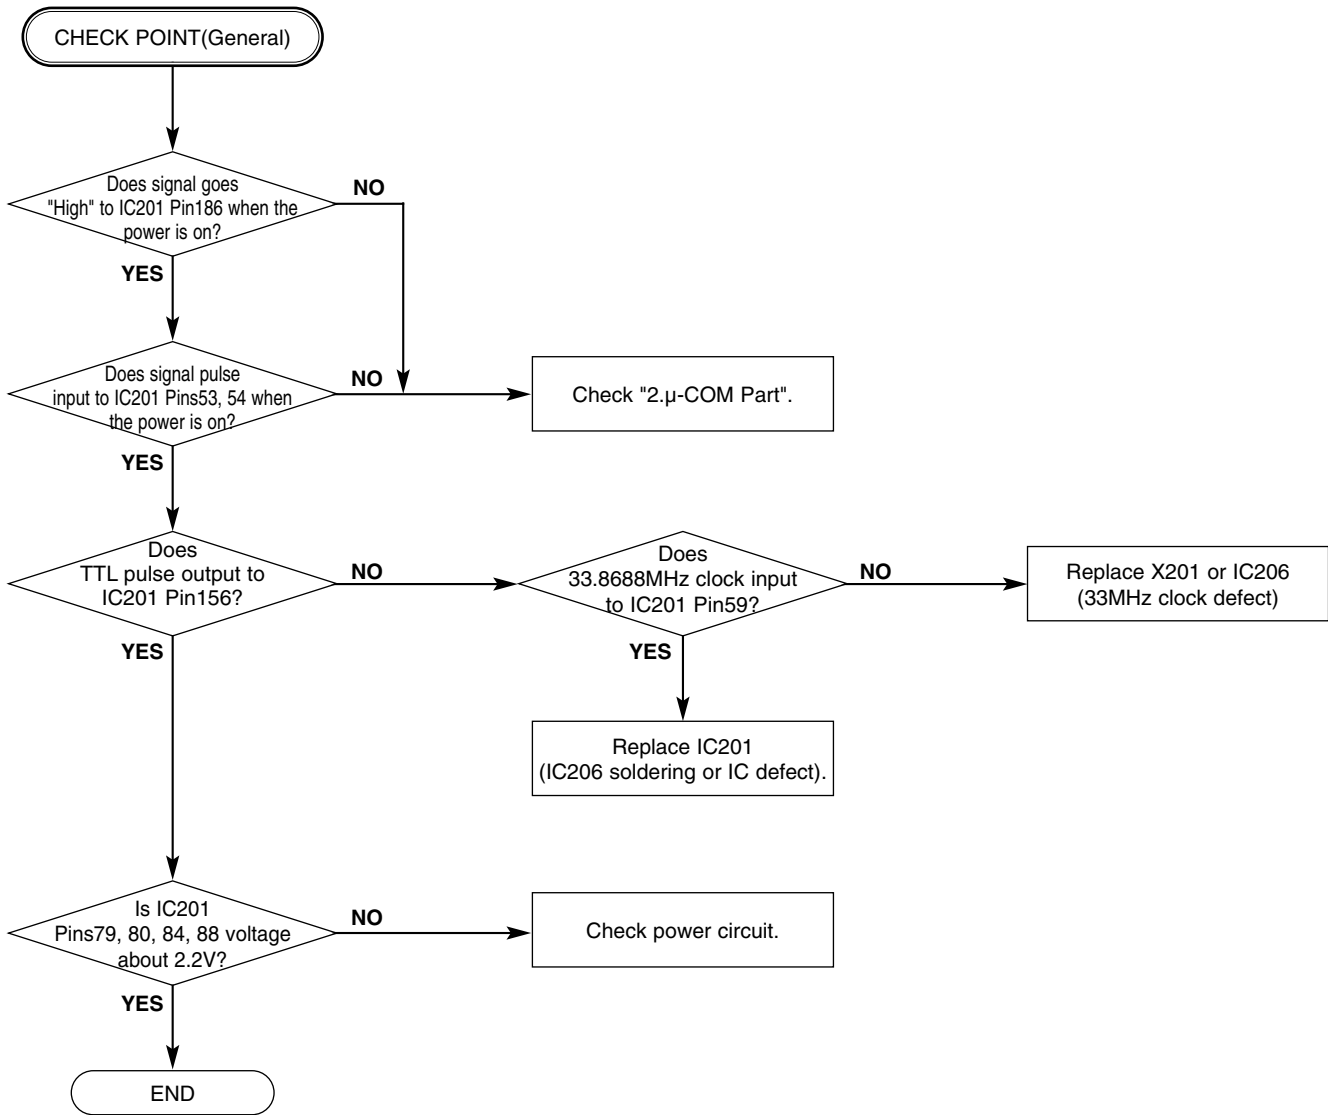


B.

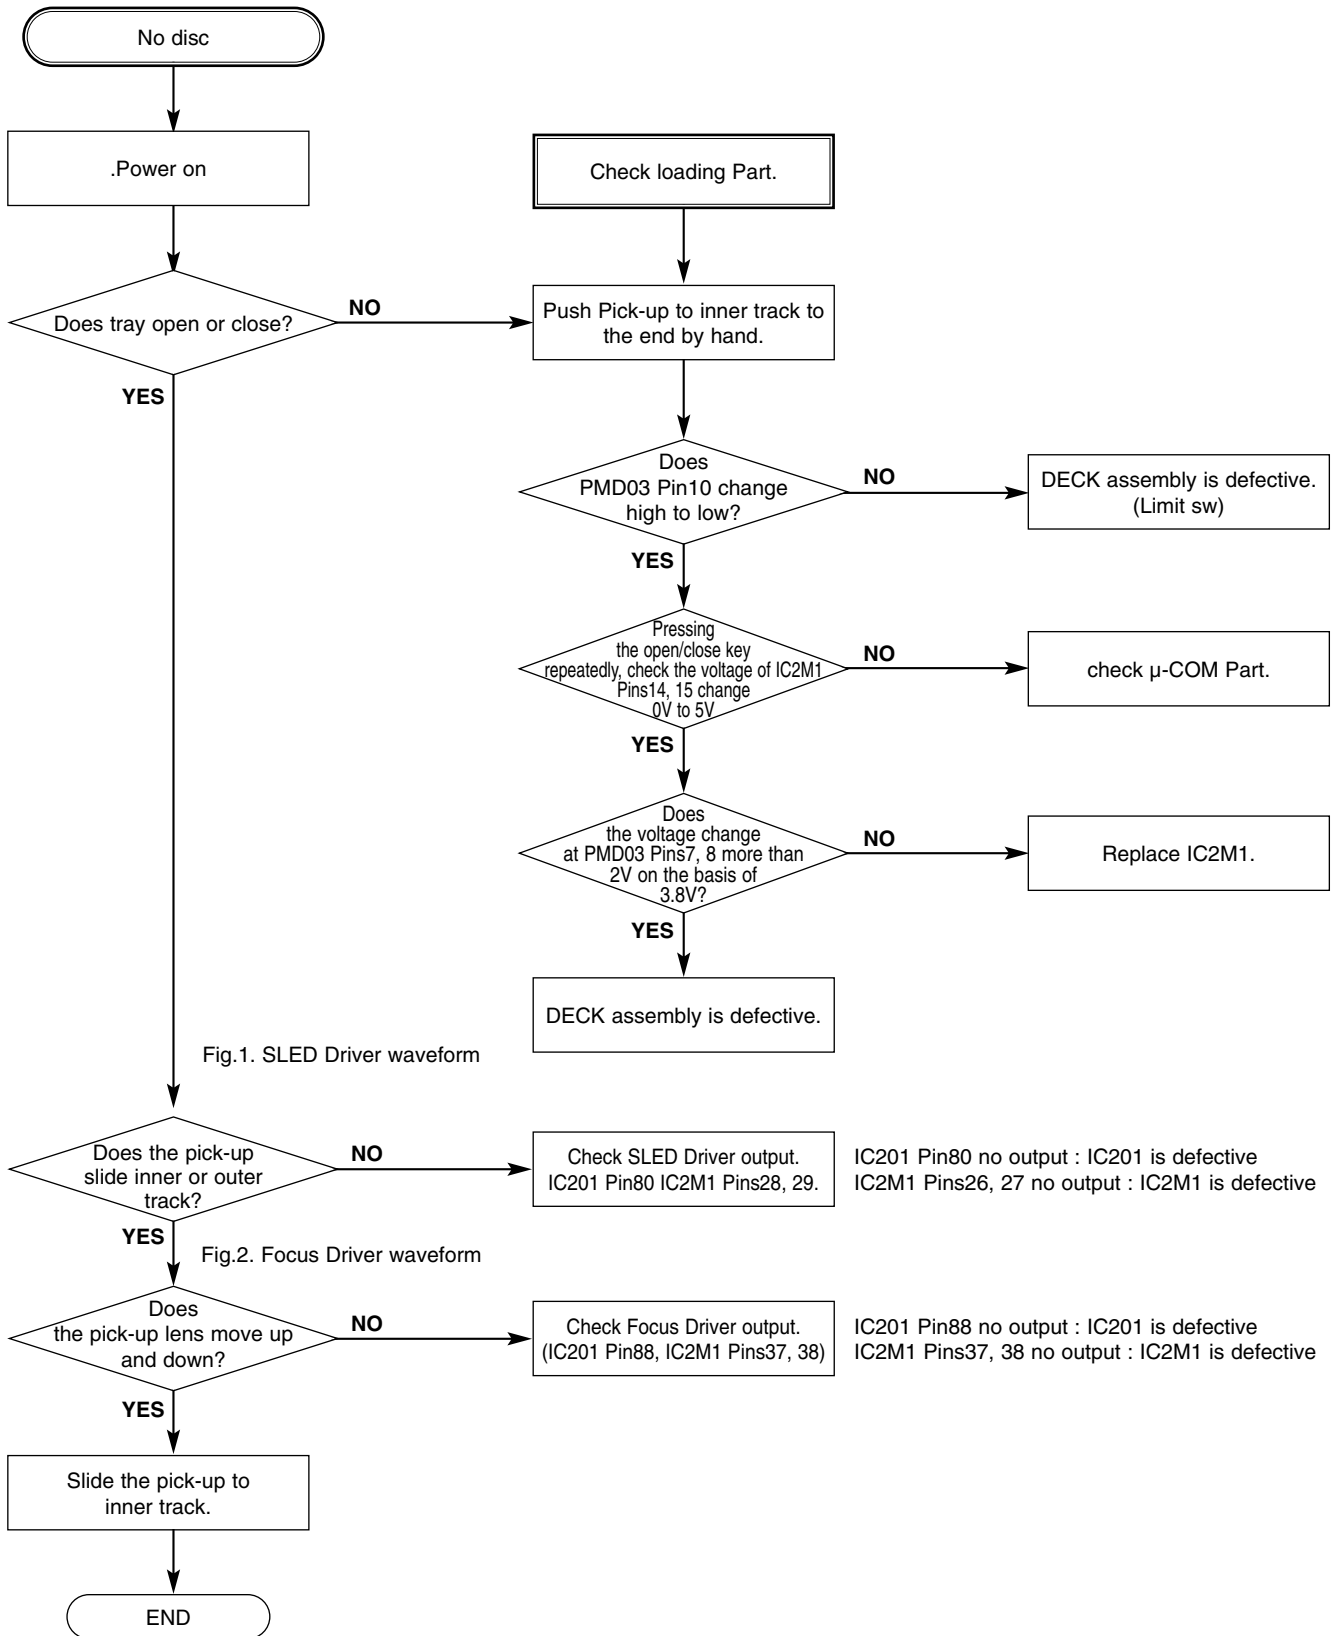

C.

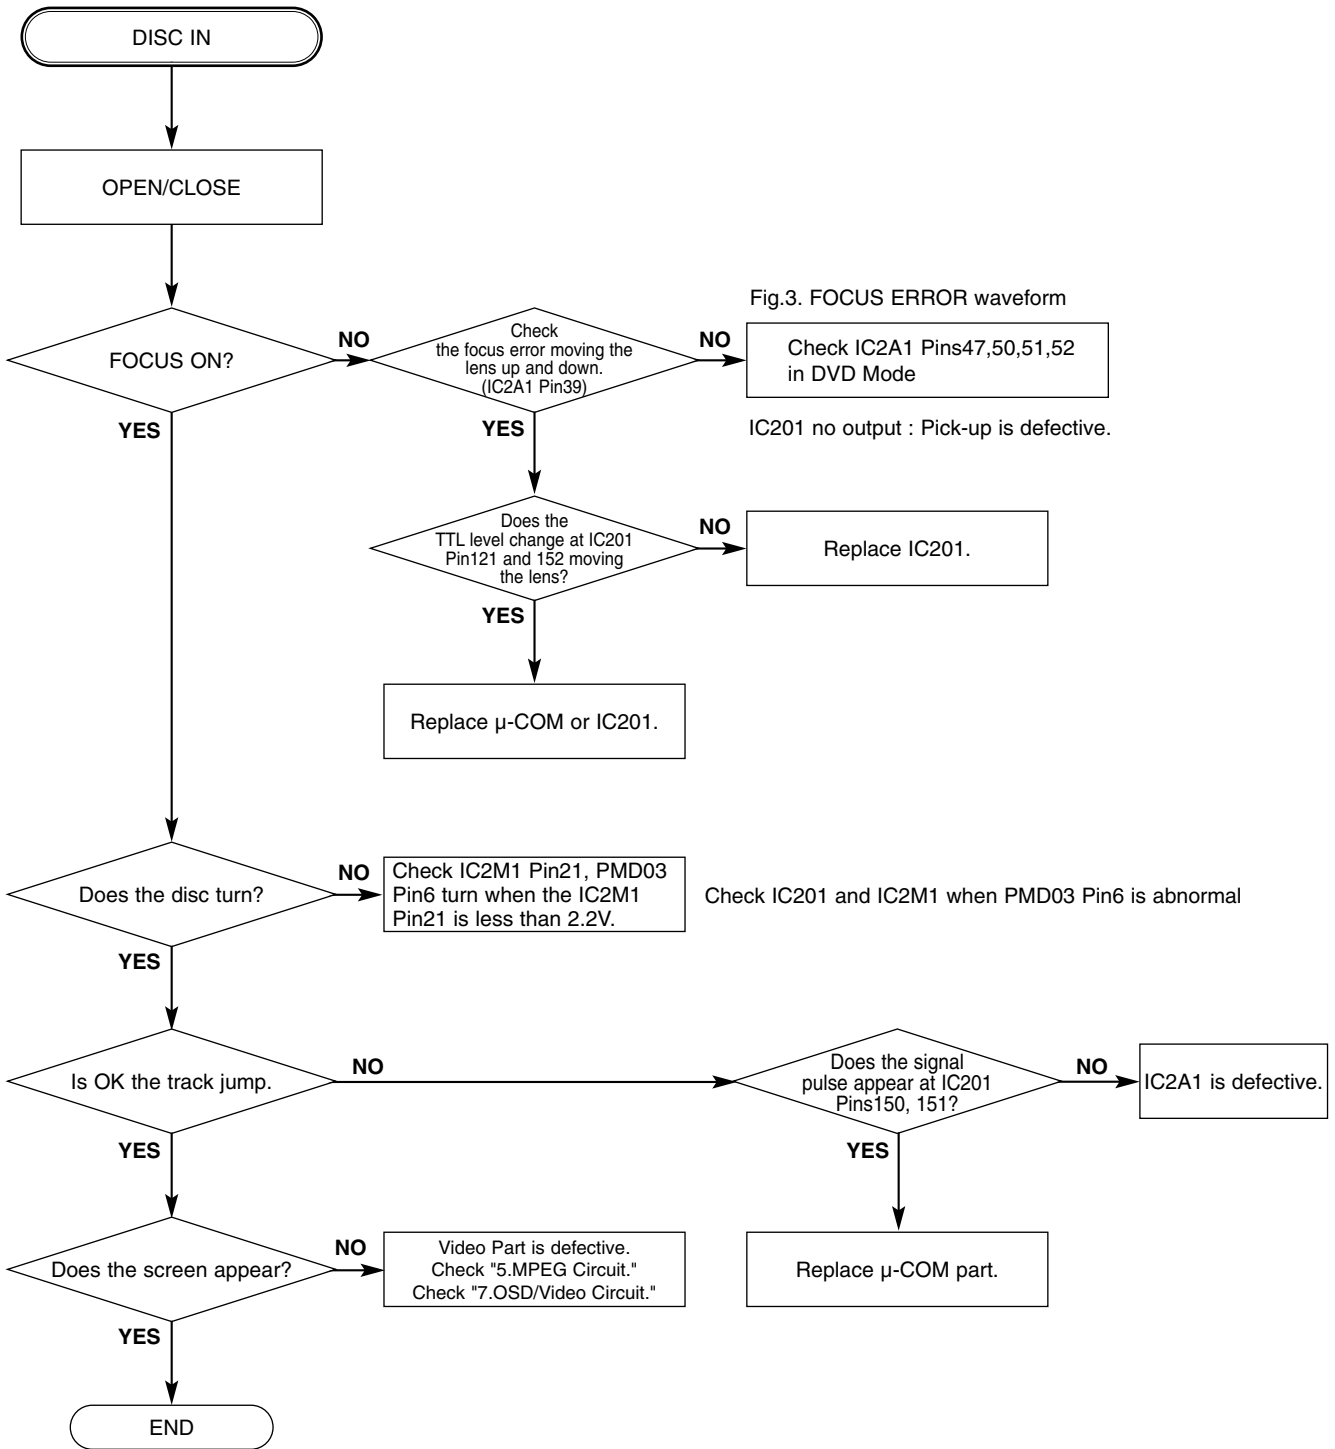


D.

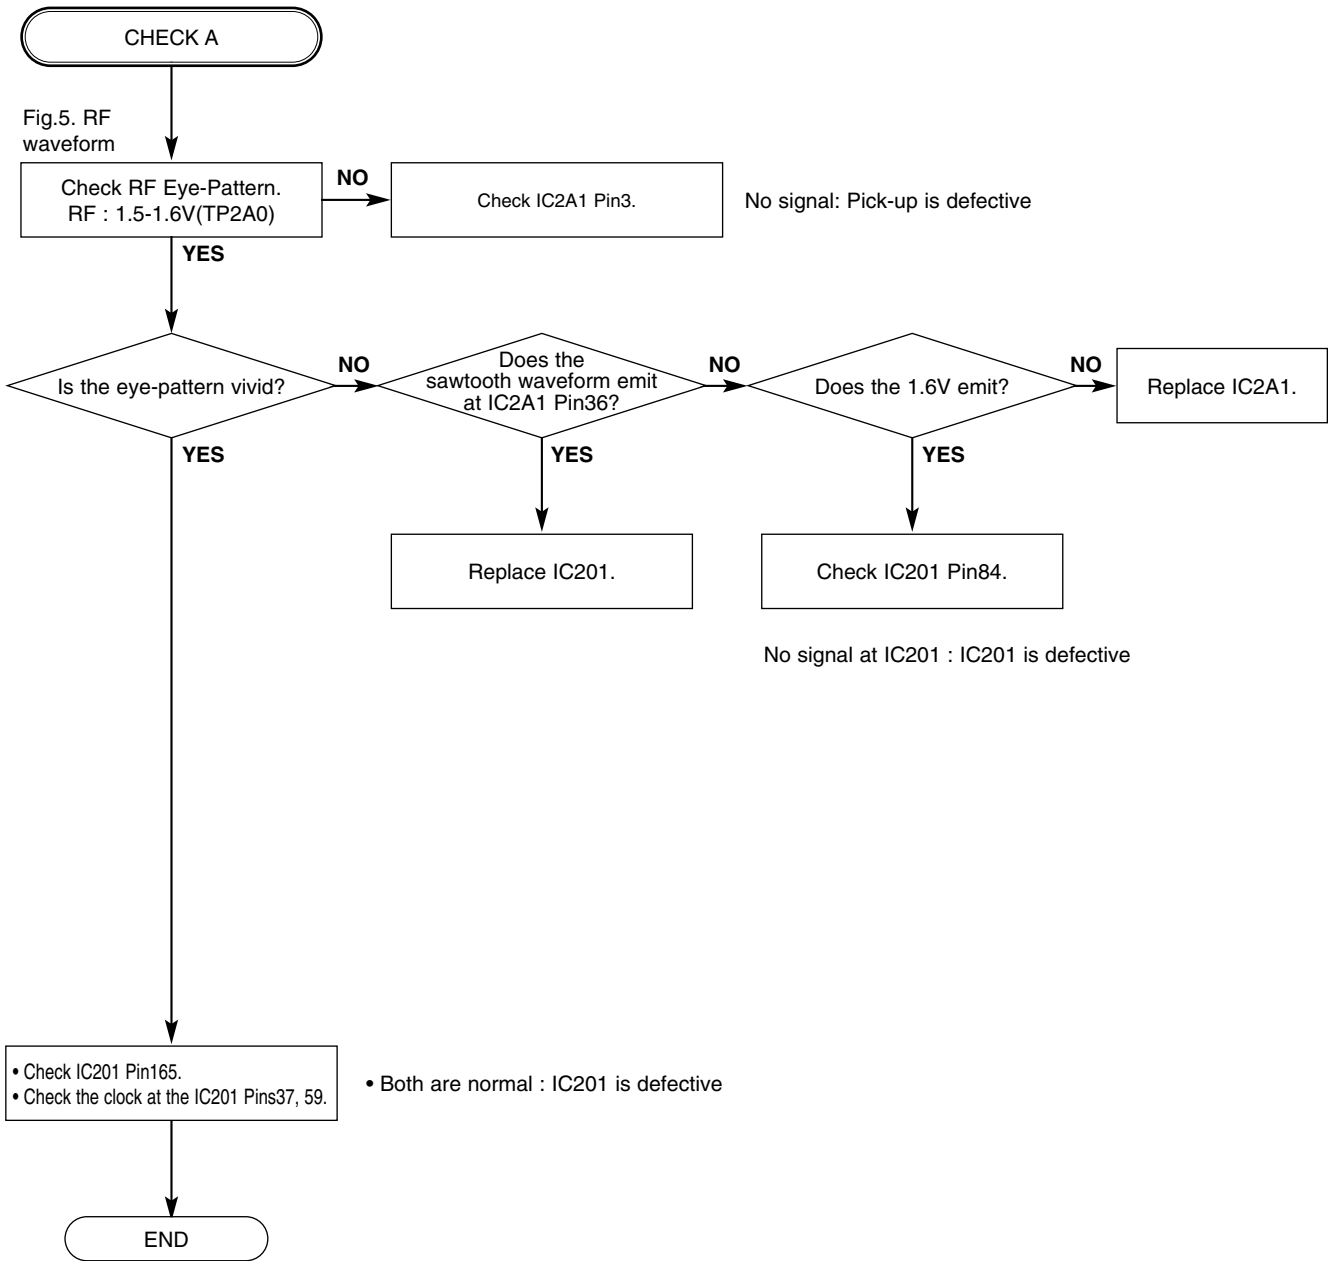


BLOCK DIAGRAMS

1. DVD OVERALL BLOCK DIAGRAM

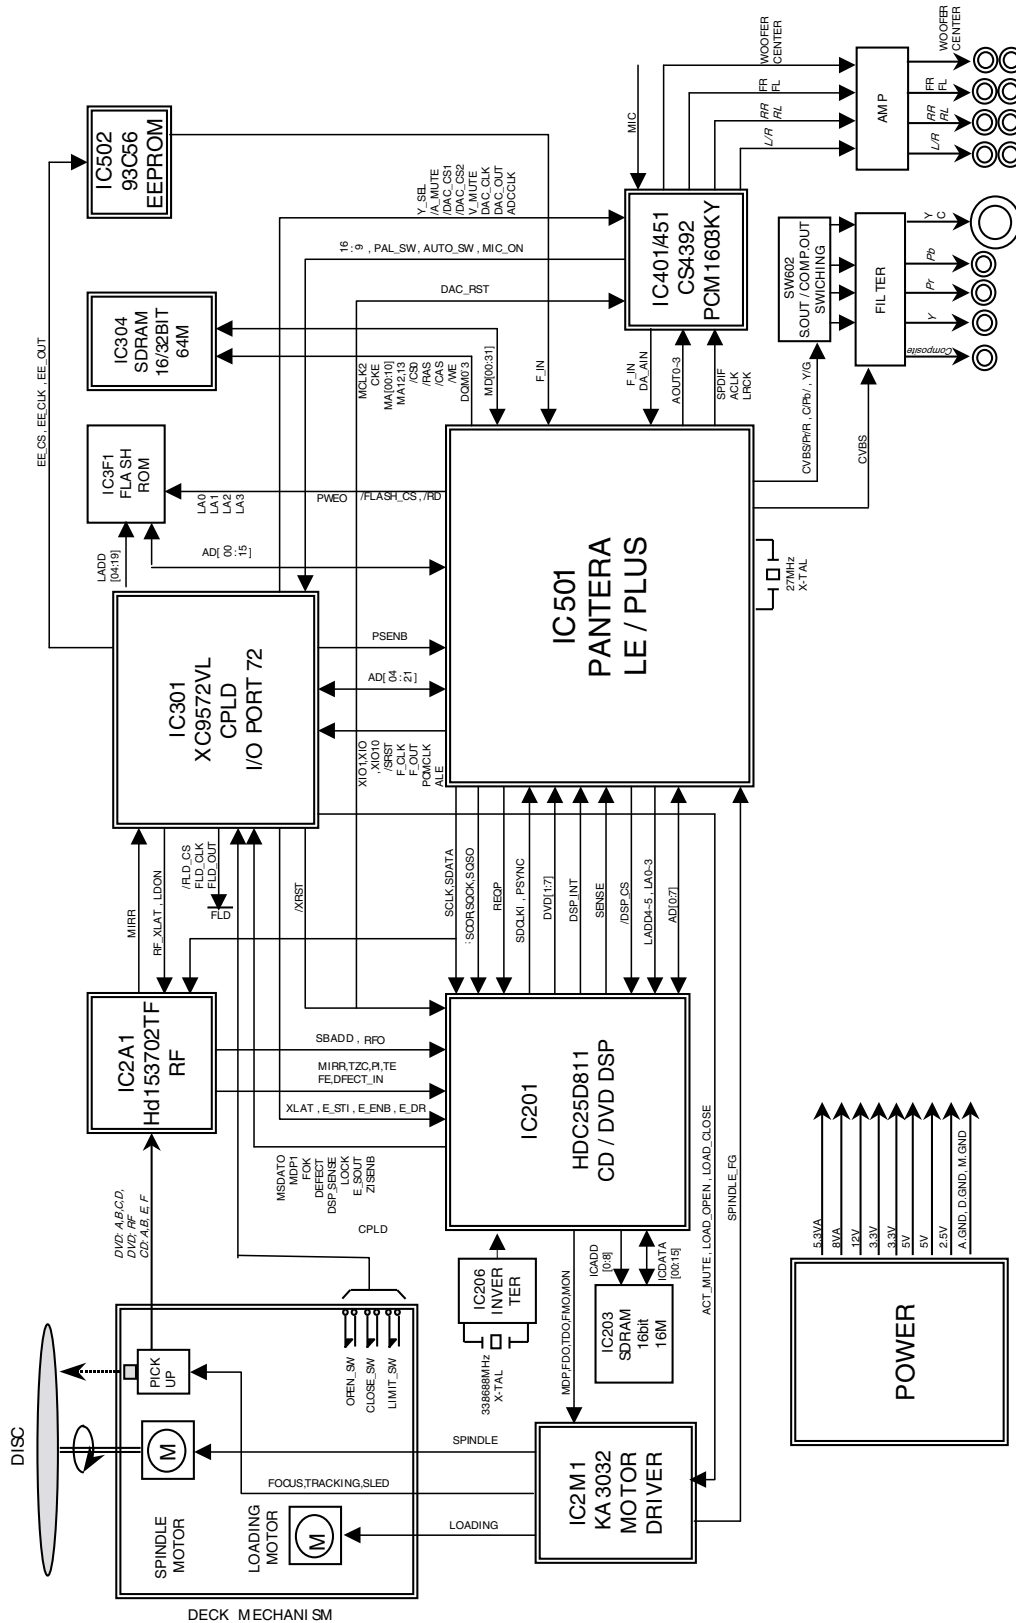


2. RF/CD DSP/DVD DSP/DVD SERVO BLOCK DIAGRAM

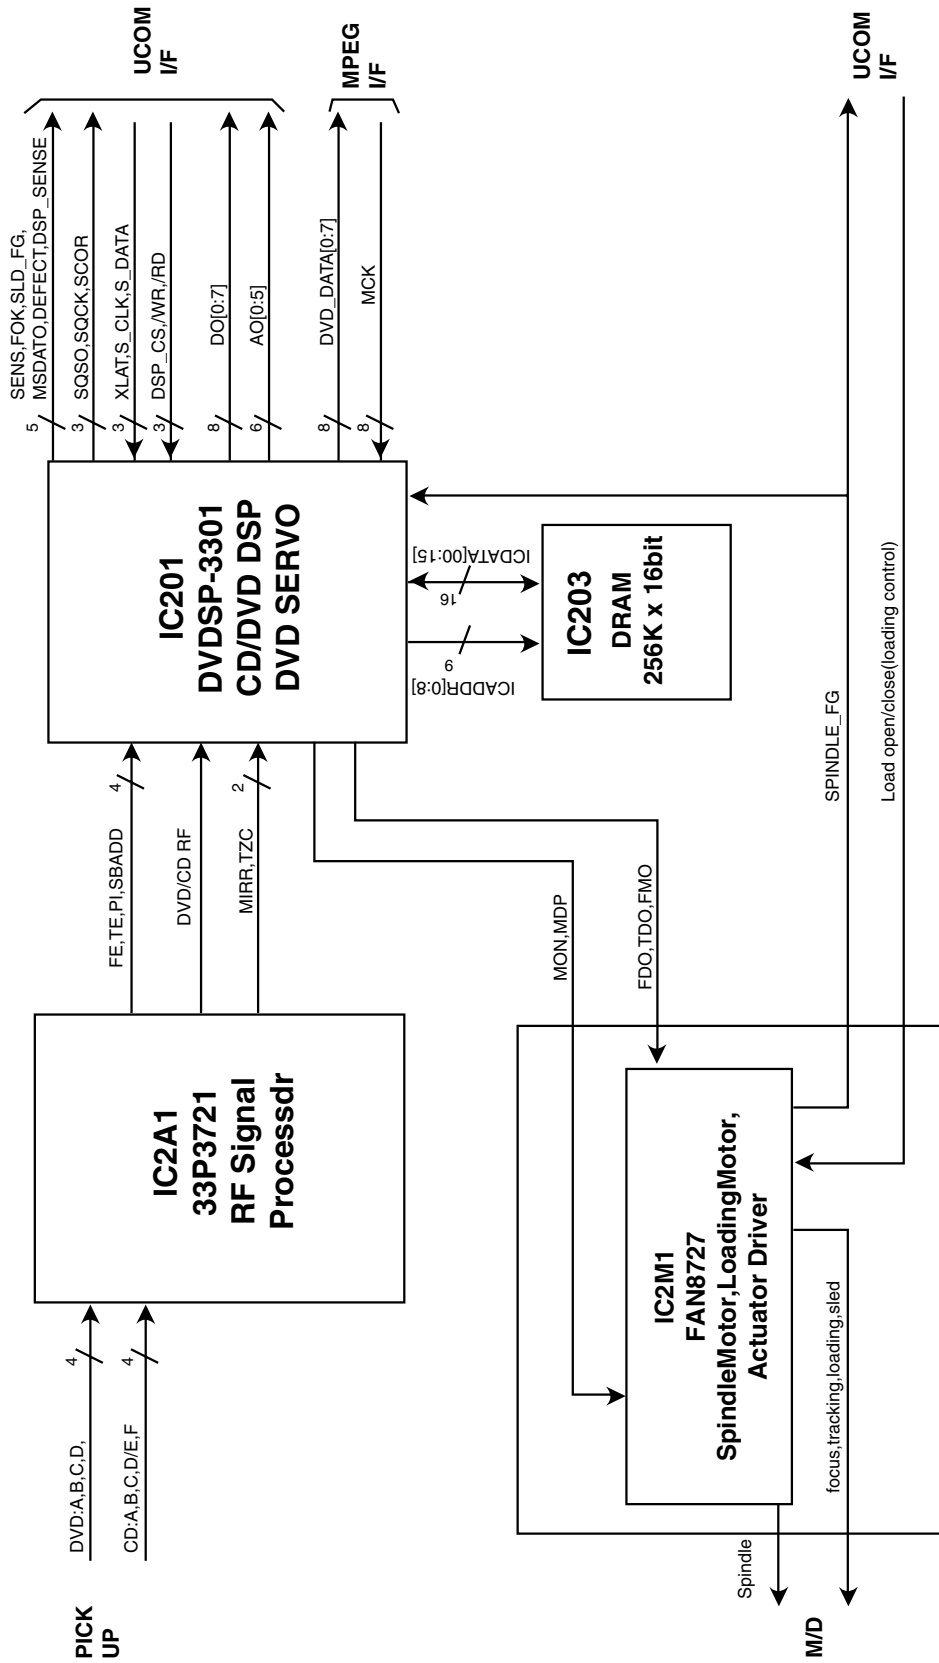


DV4000's


3. AUDIO BLOCK DIAGRAM

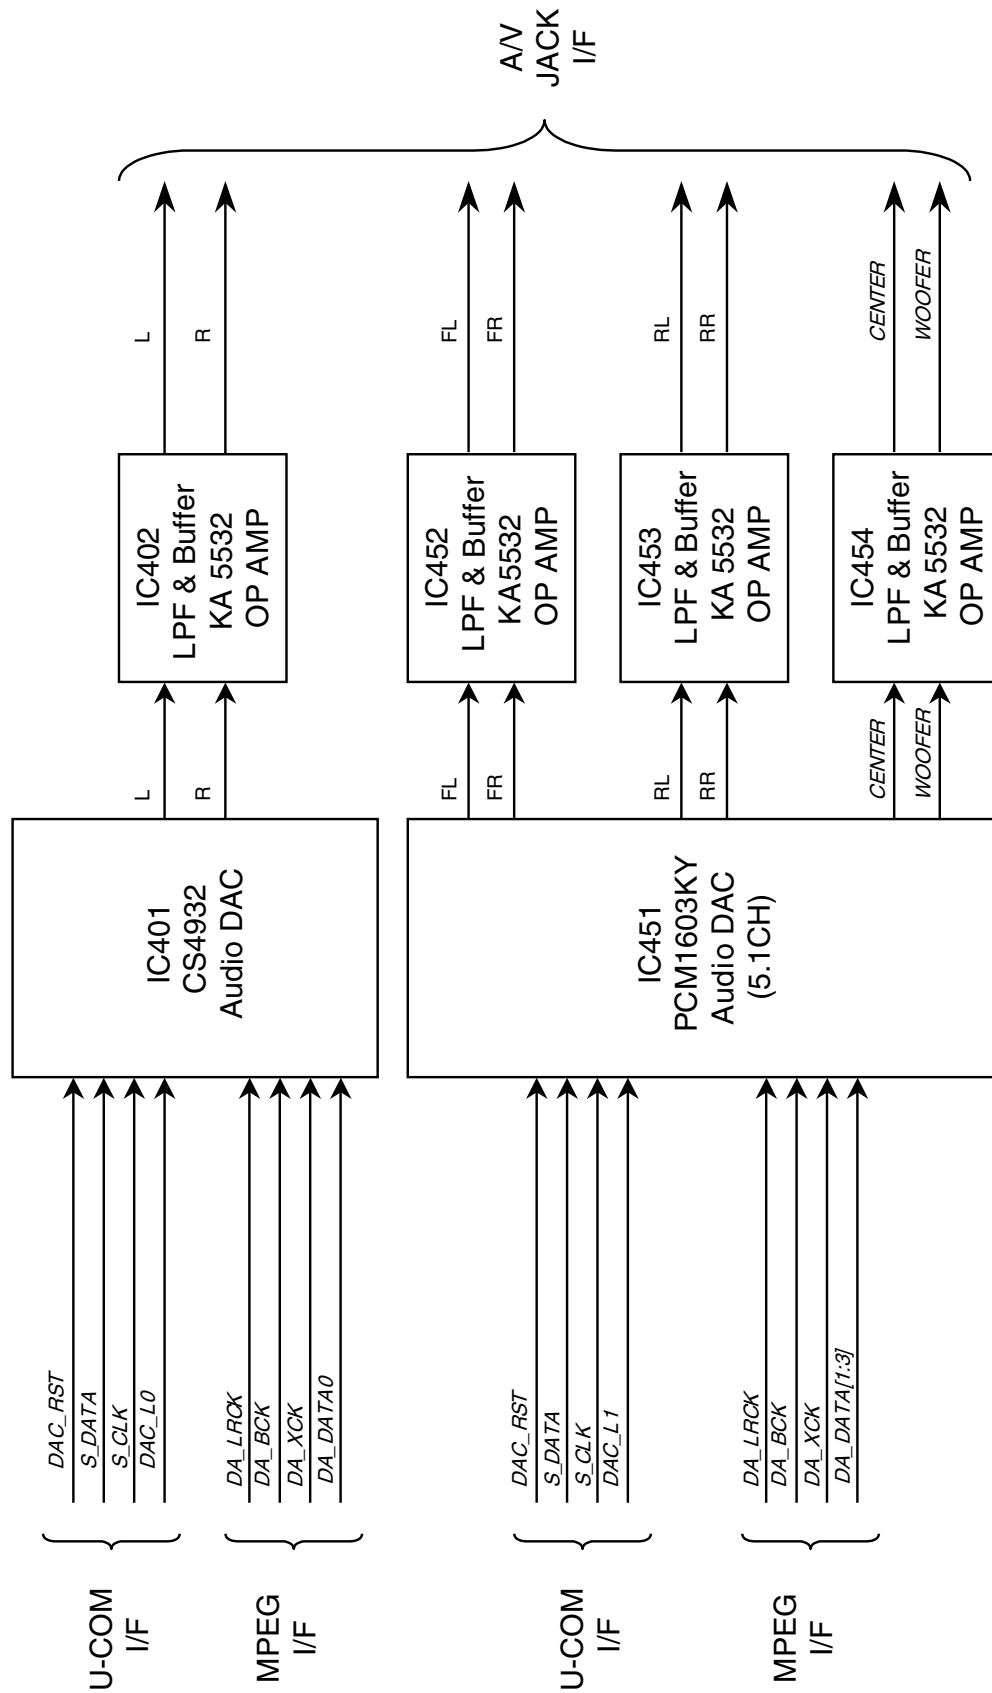

4. MPEG & MEMORY Block Diagram

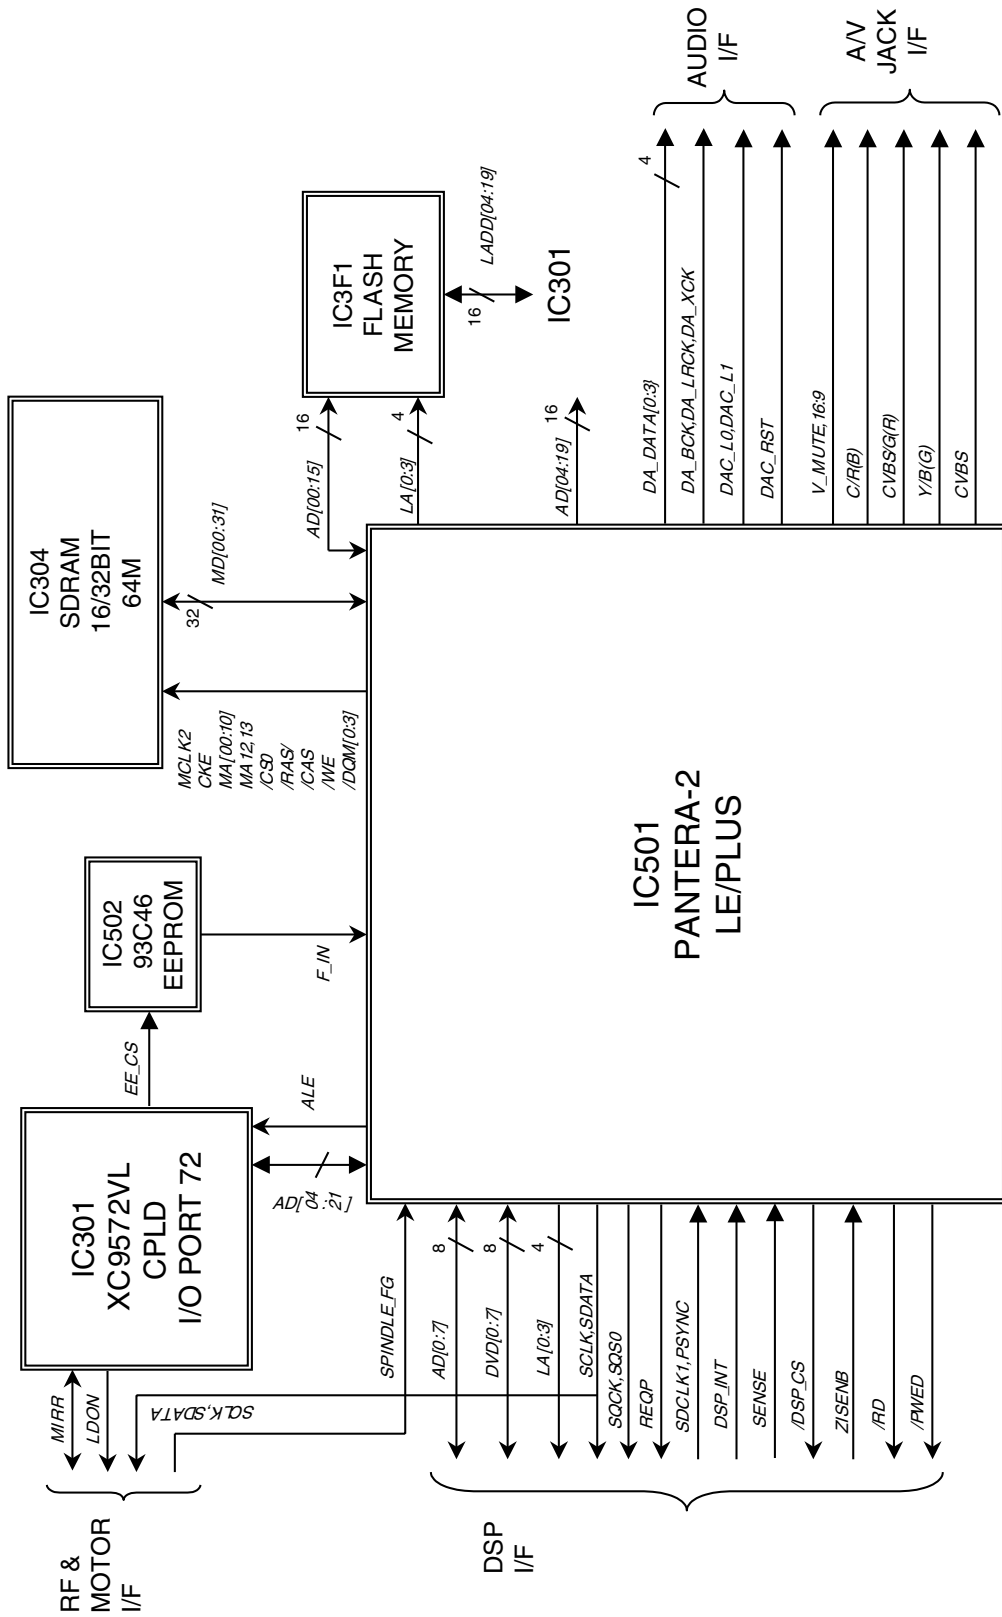

2. DRIVE & RF CIRCUIT DIAGRAM

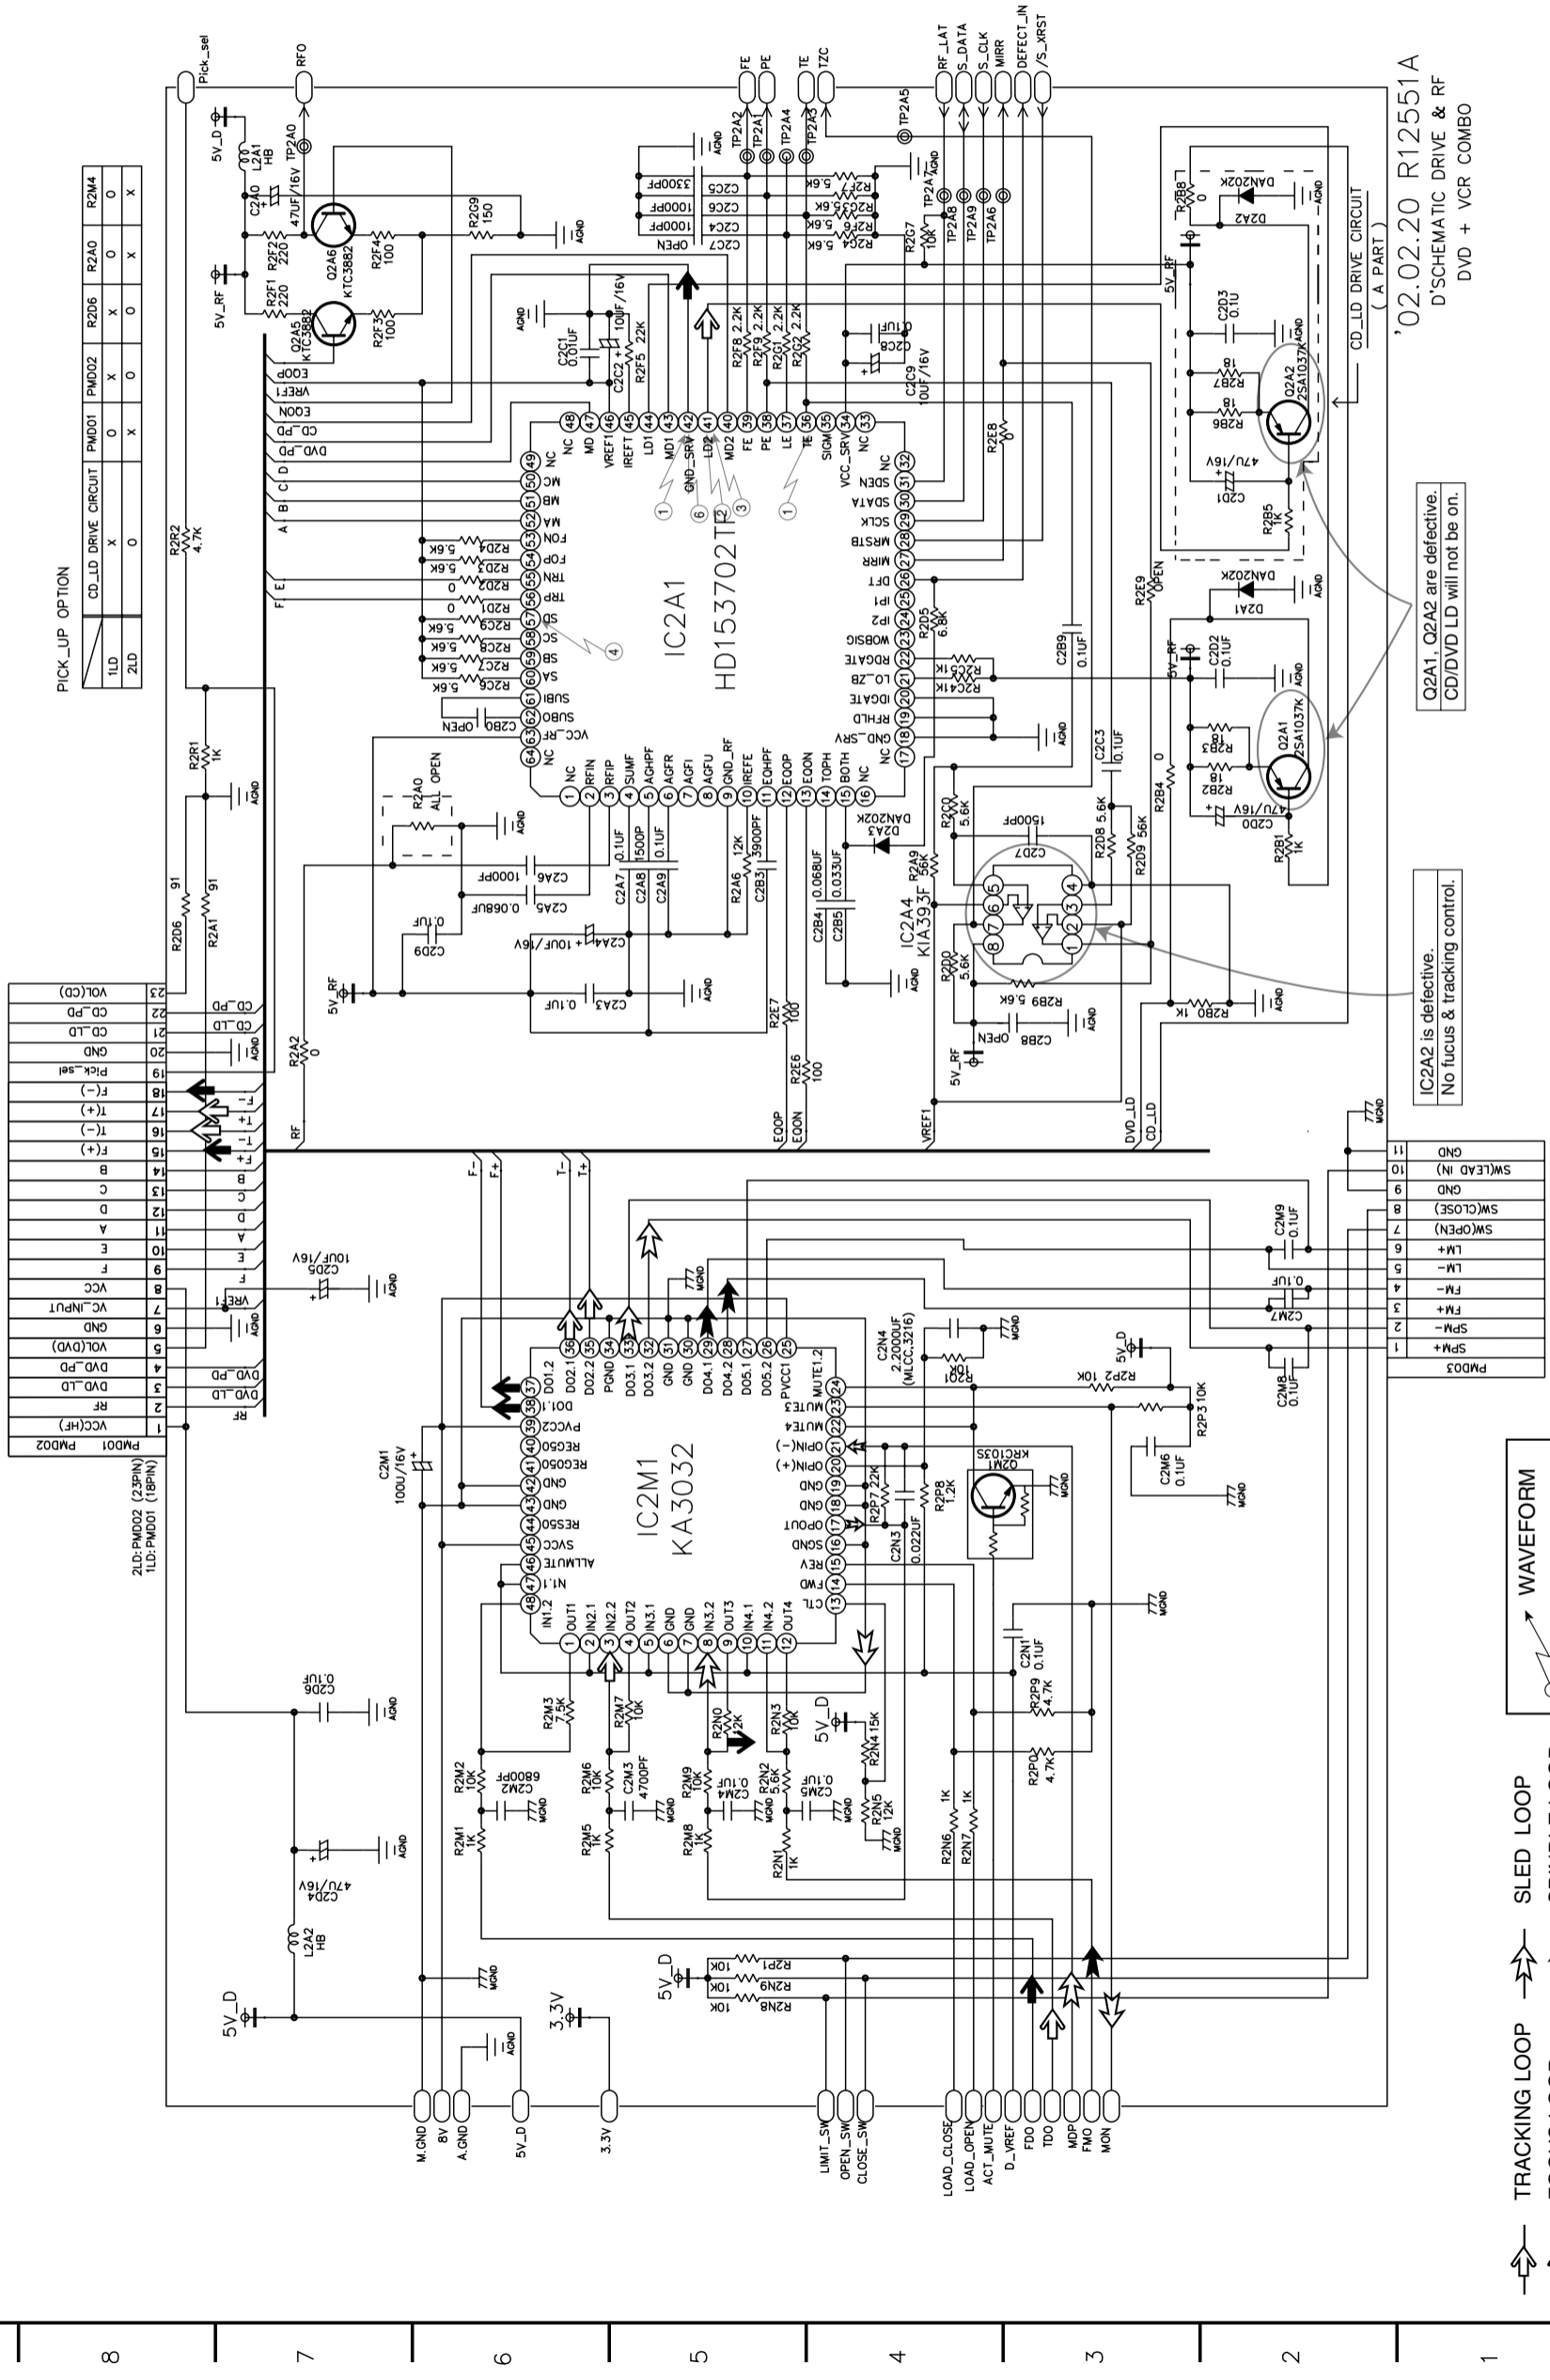


TRACKING LOOP
 SLED LOOP
 FOCUS LOOP
 SPINDLE LOOP
 WAVEFORM

'02.02.20 R12551A
D'SCHEMATIC DRIVE & RF
DVD + VCR COMBO

Q2A1, Q2A2 are defective.
CD/DVD LD will not be on.

IC2A2 is defective.
No focus & tracking control.

3. MPEG CIRCUIT DIAGRAM

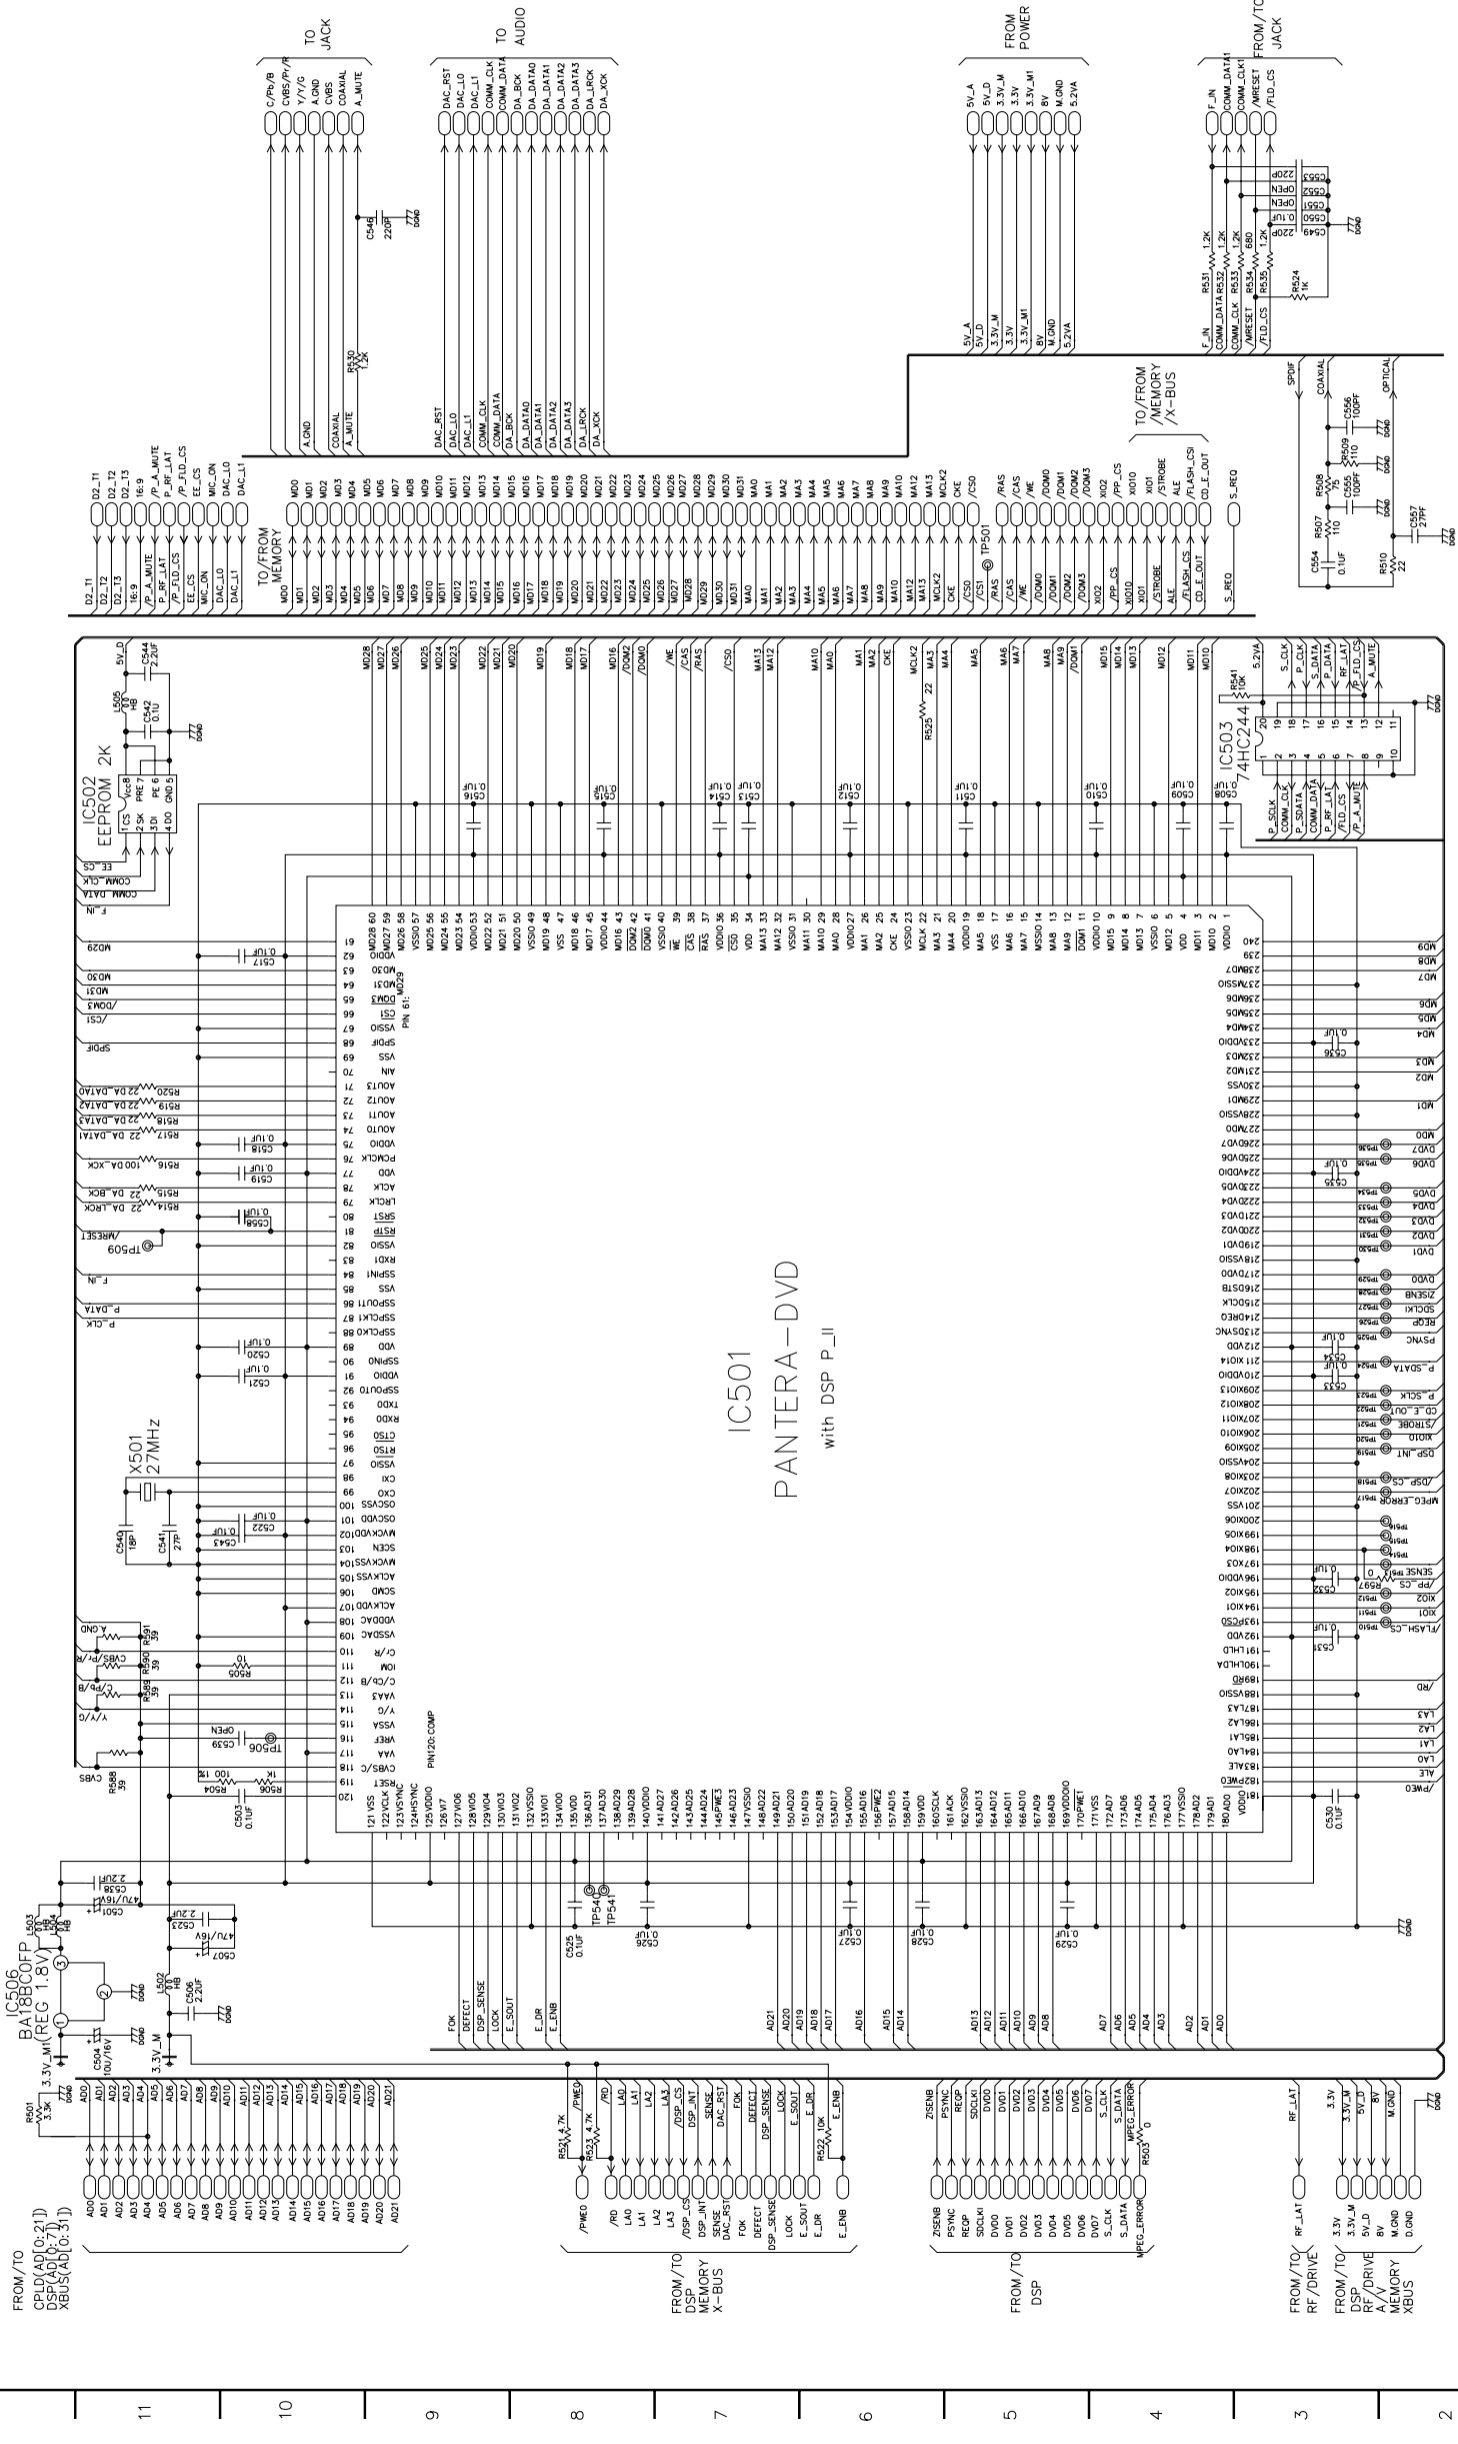

LOCATION GUIDE


C501	D11	TP501	M5
C503	D10	TP506	E10
C504	C11	TP509	H11
C506	C11	TP510	F3
C507	D10	TP511	F3
C508	L3	TP512	F3
C509	L4	TP513	F2
C510	L4	TP514	F2
C511	L5	TP515	F2
C512	L6	TP516	F2
C513	L7	TP517	G3
C514	L7	TP518	G3
C515	L8	TP519	G3
C516	L9	TP520	G3
C517	J10	TP521	G3
C518	J10	TP522	G3
C519	J10	TP523	G3
C520	H10	TP524	H3
C521	G10	TP525	H3
C522	F10	TP526	H3
C523	D11	TP527	H3
C525	C8	TP528	H3
C526	D7	TP529	H3
C527	D6	TP530	H3
C528	D6	TP531	H3
C529	D5	TP532	L3
C530	D3	TP533	L3
C531	F3	TP534	L3
C532	F3	TP535	L3
C533	G3	TP536	L3
C534	H3	TP537	L3
C535	H3	TP538	L3
C536	L3	TP539	L3
C538	D11	XIO2	F1
C539	E10	XIO2	F2
C540	F11	XIO2	M4
C541	F11	XIO2	M4
C542	L11	XIO2	M4
C543	F10	XIO2	M4
C544	F10	XIO2	M4
C545	D6	XIO2	M4
C546	D6	XIO2	M4
C549	O3	XIO2	M4
C550	P3	XIO2	M4
C551	P3	XIO2	M4
C552	P3	XIO2	M4
C553	P3	XIO2	M4
C554	M3	XIO2	M4
C555	M3	XIO2	M4
C556	N3	XIO2	M4
C557	M2	XIO2	M4
C558	I10	XIO2	M4
IC501	G7	XIO2	M4
IC502	K11	XIO2	M4
IC503	L4	XIO2	M4
IC506	C12	XIO2	M4
E10	G11	XIO2	M4
L502	D12	XIO2	M4
L504	D12	XIO2	M4
L505	L11	XIO2	M4
R501	B12	XIO2	M4
R503	B4	XIO2	M4
R504	E10	XIO2	M4
R505	E10	XIO2	M4
R507	E10	XIO2	M4
R508	E10	XIO2	M4
R509	N3	XIO2	M4
R510	N3	XIO2	M4
R514	I11	XIO2	M4
R515	I11	XIO2	M4
R516	I11	XIO2	M4
R517	I11	XIO2	M4
R518	I11	XIO2	M4
R519	I11	XIO2	M4
R520	I11	XIO2	M4
R521	B8	XIO2	M4
R522	B6	XIO2	M4
R523	B8	XIO2	M4
R524	O3	XIO2	M4
R525	O3	XIO2	M4
R526	O3	XIO2	M4
R527	O3	XIO2	M4
R528	O3	XIO2	M4
R529	O4	XIO2	M4
R531	O4	XIO2	M4
R532	O4	XIO2	M4
R533	O3	XIO2	M4
R534	O3	XIO2	M4
R535	O3	XIO2	M4
R541	L3	XIO2	M4
R542	L3	XIO2	M4
R543	L3	XIO2	M4
R544	L3	XIO2	M4
R545	L3	XIO2	M4
R546	L3	XIO2	M4
R547	L3	XIO2	M4
R548	L3	XIO2	M4
R549	L3	XIO2	M4
R550	E11	XIO2	M4
R551	E11	XIO2	M4
R552	E11	XIO2	M4
R553	E11	XIO2	M4
R554	E11	XIO2	M4
R555	E11	XIO2	M4
R556	E11	XIO2	M4
R557	E11	XIO2	M4
R558	E11	XIO2	M4
R559	E11	XIO2	M4
R597	F2	XIO2	M4

'02.02.20 R12552A

D'SCHEMATIC PANTERA


DVD + VCR COMBO

4. AUDIO DM CIRCUIT DIAGRAM

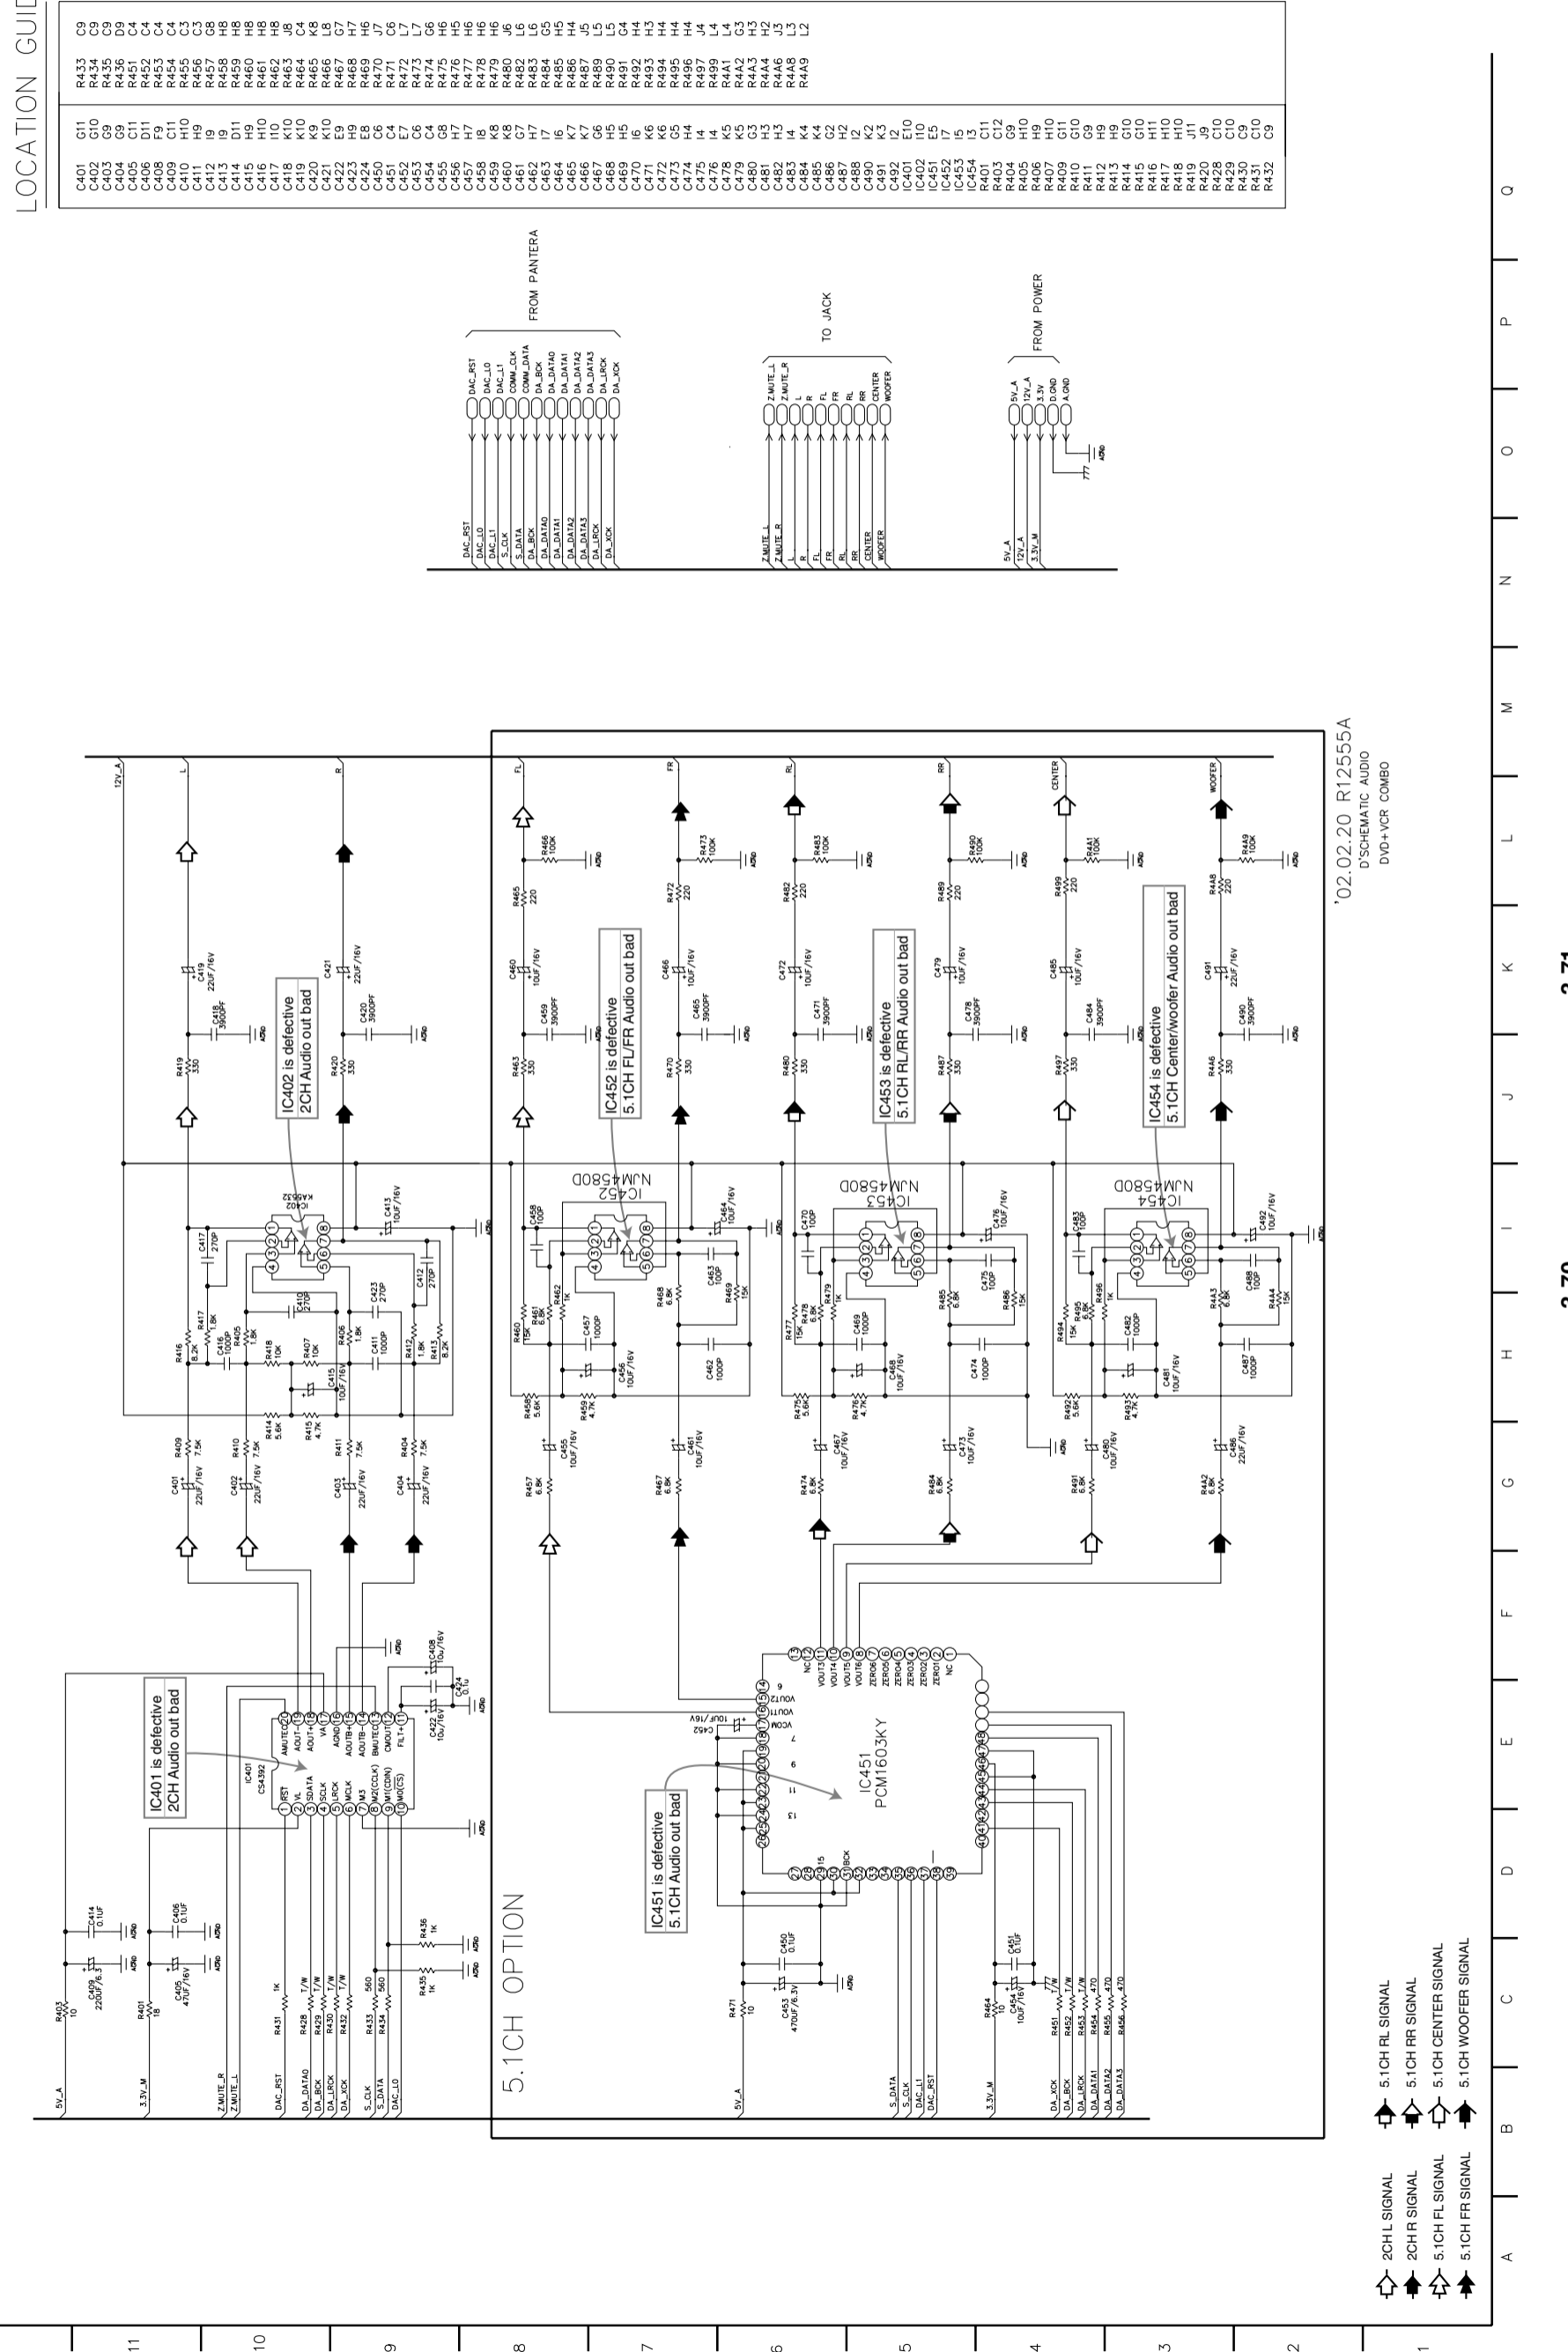

02.02.20 R12555A
D'SCHEMATIC AUDIO
DVD+VCR COMBO

6. SCART(JACK) CIRCUIT DIAGRAM

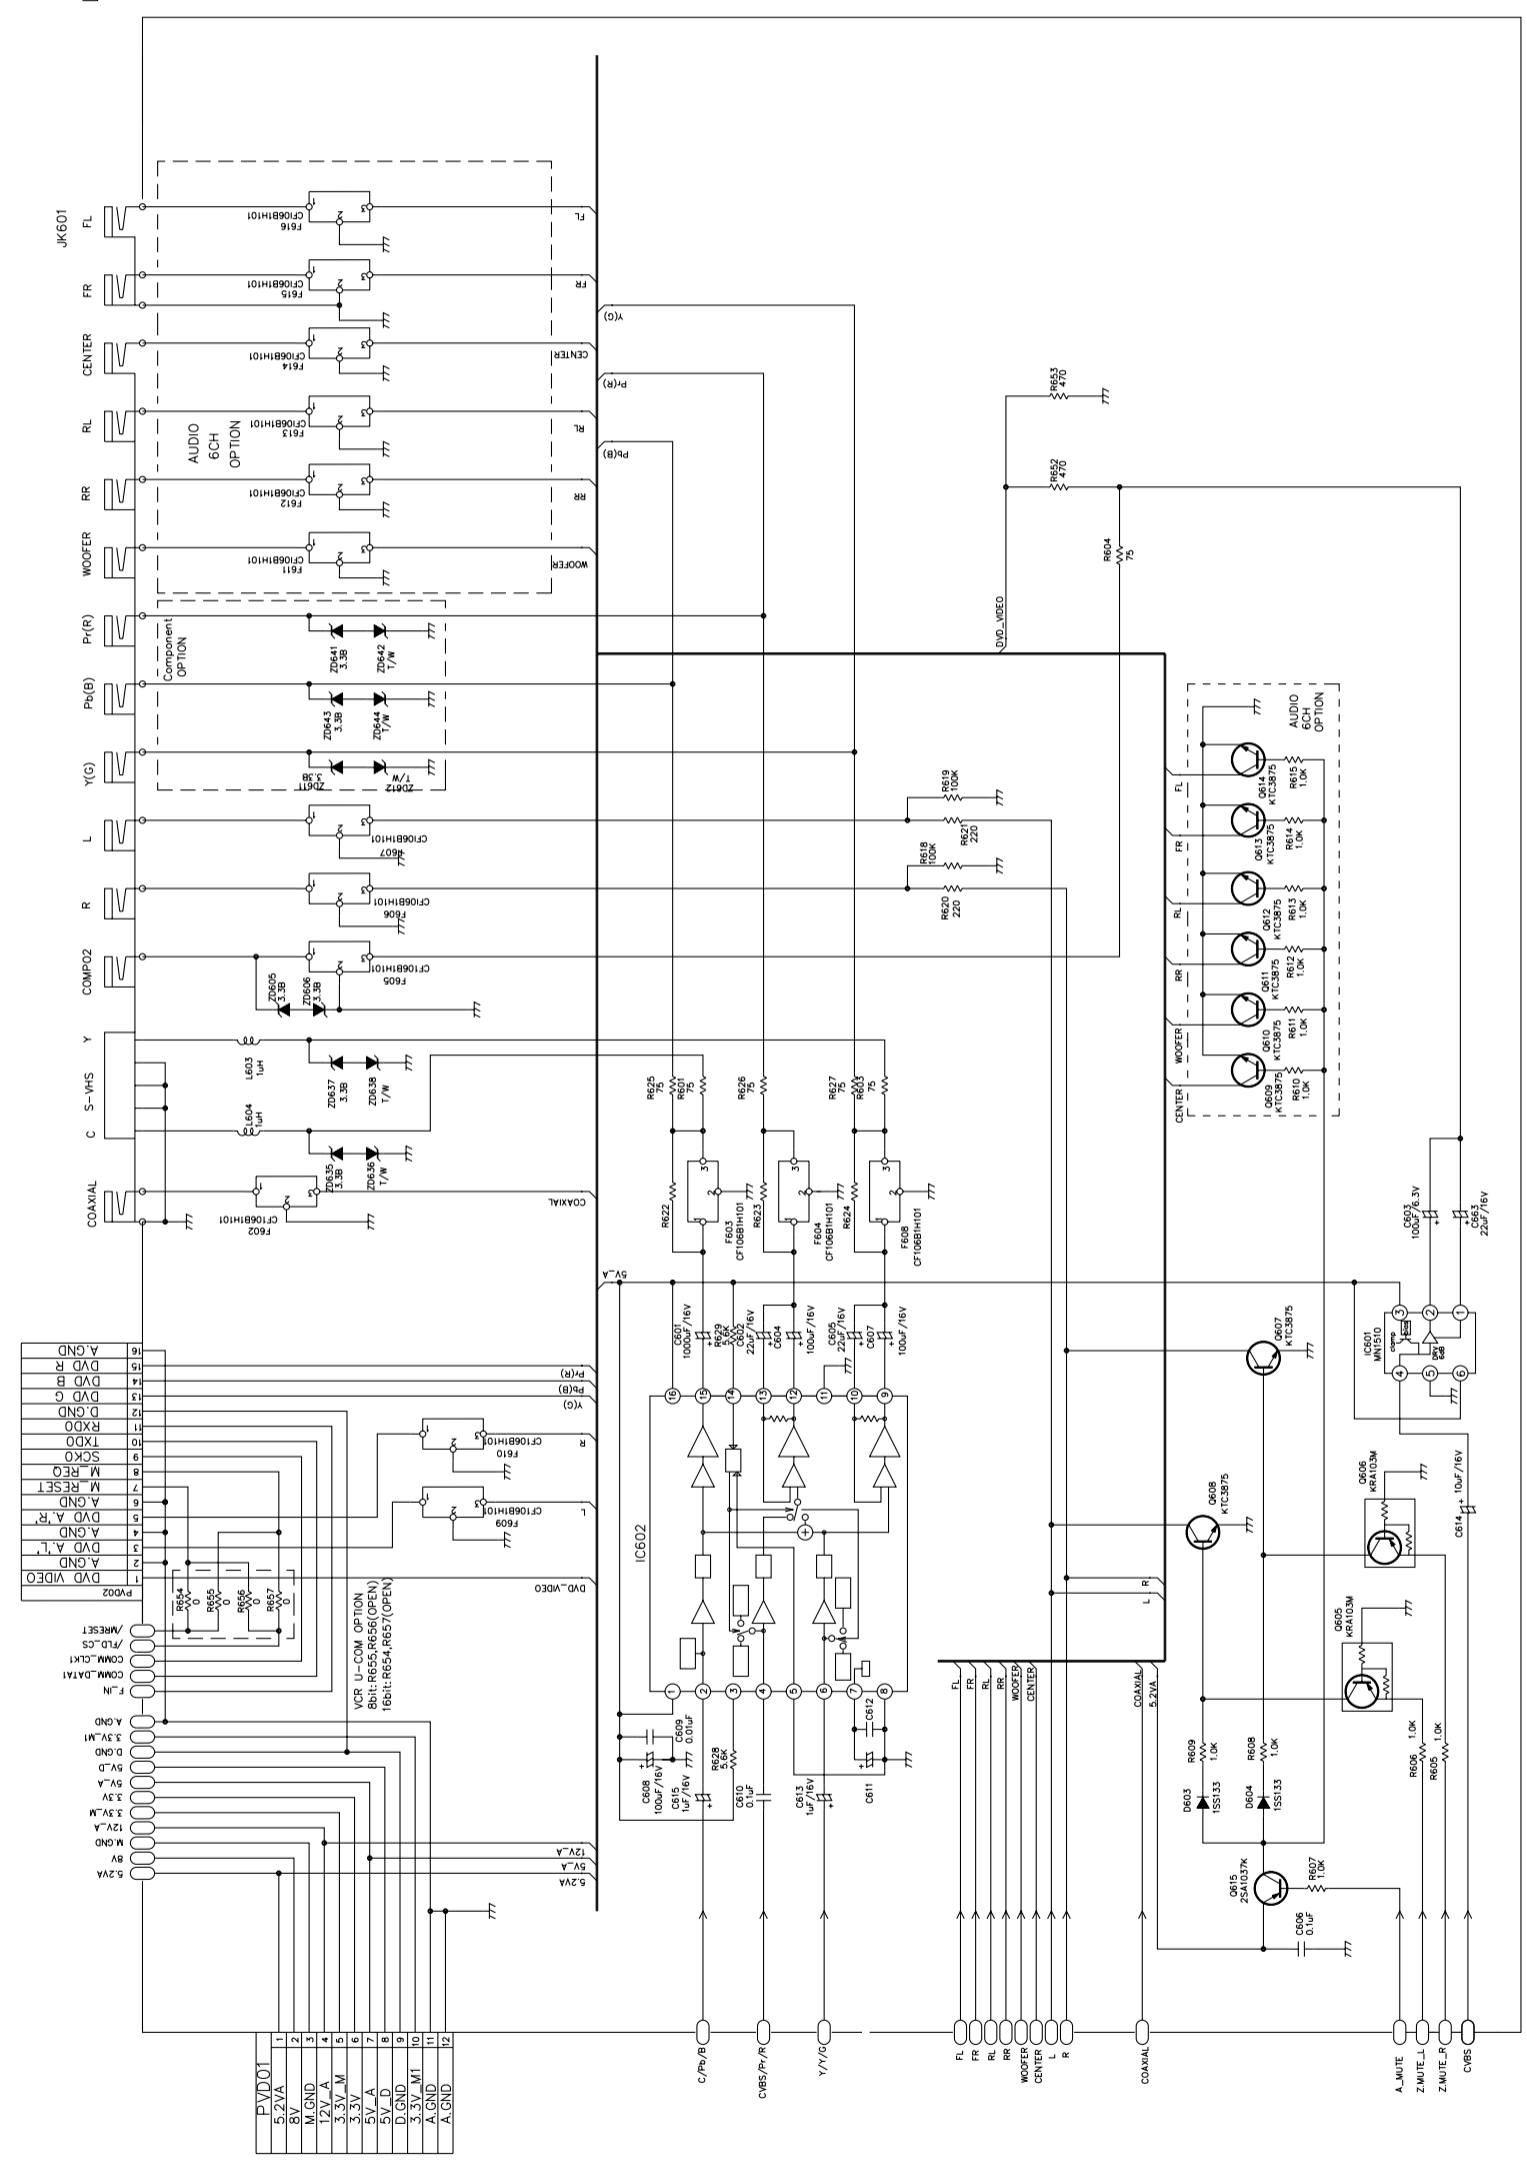


LOCATION GUIDE

C601	G7
C602	H2
C603	H2
C604	CZ
C605	G6
C606	C3
C607	G6
C608	D8
C609	E7
C610	D7
C611	D6
C612	E6
C613	D6
C614	D7
C615	D7
D603	H2
D604	D4
D604	D4
F602	H10
F603	H7
F604	H6
F605	J9
F606	J9
F607	K9
F608	H6
F609	C8
F610	C8
F611	M10
F612	M10
F613	M10
F614	M10
F615	N10
F616	O10
F617	O10
IC601	G3
IC602	F8
JK601	O11
L603	I10
L603	I10
O611	J3
O612	J3
O613	K3
O614	K3
O615	D4
O615	D4
R601	L7
R603	I6
R604	M4
R605	E2
R606	E2
R607	D3
R608	E4
R609	E4
R610	L3
R611	L3
R612	L3
R613	L3
R614	K3
R615	K3
R618	K6
R619	K6
R620	J6
R621	K5
R622	H7
R623	H7
R624	H6
R625	H7
R626	L7
R627	I6
R628	E7
R629	E7
R652	M5
R653	N5
R654	F11
R655	F10
R656	F10
R657	F10
ZD605	J10
ZD610	K9
ZD611	K9
ZD612	K9
ZD635	H10
ZD636	H9
ZD637	I10
ZD638	I9
ZD641	L10
ZD642	L9
ZD643	K10
ZD644	K9

02.02.20 R12556A
 D'SCHEMATIC A/V JACK : SCART
 DVD+VCR COMBO


A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q

• WAVEFORMS

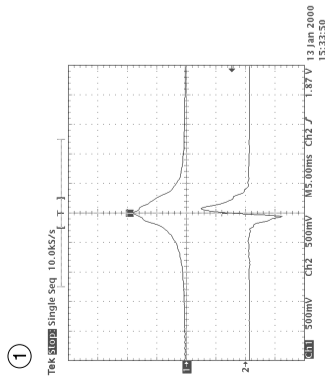


IC2A1 Pin 39, Focus Error
IC2A1 Pin 38, PE

④

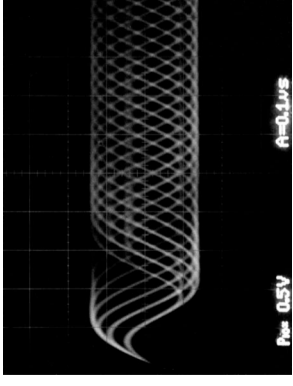


Q2A6 Collector output(TP2AO)
RF

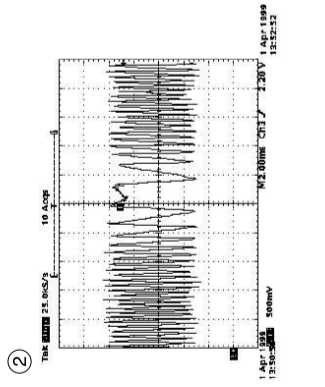


IC2A1 Pin 36
Tracking Error

⑤

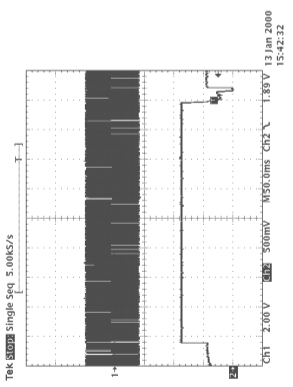


IC201 Pin 80, SLED FG
IC201 Pin 154, SLED FMO

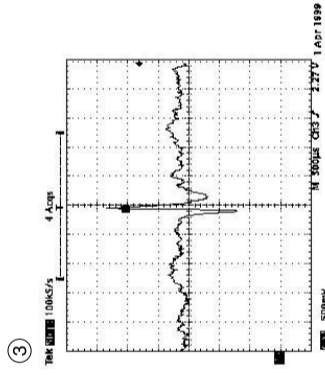


IC2A1 Pin 36
VBR TRACKING Error

⑥

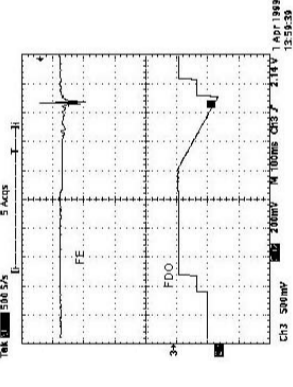


IC2A1 Pin39, Focus Error(in Focus Search)
IC201 Pin 88, Focus Drive(FDO)

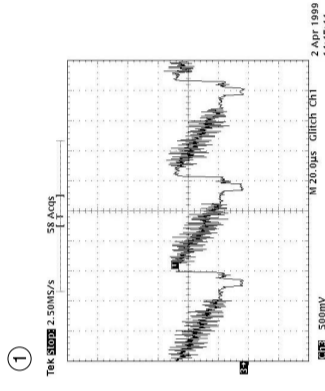


IC501 Pin 118, Composite

①

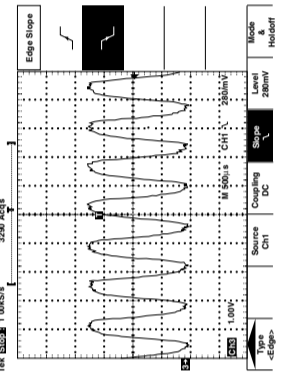


IC501 Pin 98,
MPEG Clock(27MHz)

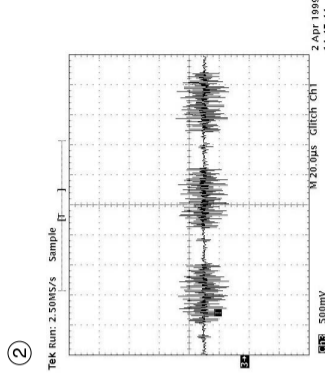


IC501 Pin 112, Chrominance
(Super video out Mode)

②

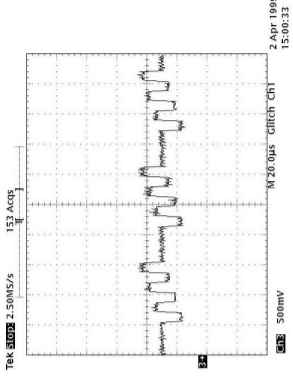


IC501 Pin 112
Component Pb

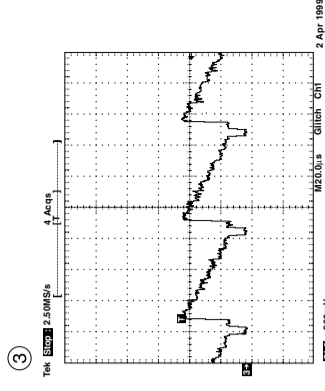


IC501 Pin 114, Luminance
(Super video out Mode)

③

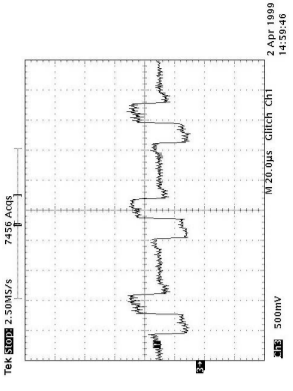

IC501 Pin 110
Component Pr

⑦

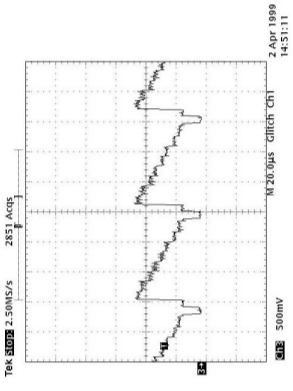

IC501 Pin 114
Component Y

PIN	IC901		IC451		IC401		IC454		IC453		IC452		IC402		IC801	
	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY
1	0	0	0	0	2.98	2.98	2.98	5.51	5.41	5.42	5.49	0	5.47	5.47	1.83	1.81
2	5.1	5.05	3.15	3.15	3.26	3.26	5.51	5.51	5.41	5.42	5.49	5.51	5.47	5.47	0	0
3	0	0	3.15	3.15	0	0	5.51	5.51	5.41	5.41	5.49	5.51	5.47	5.47	1.83	1.81
4	5.14	5.14	3.15	3.14	1.57	0	0	0	0	0	0	0	0	0	0	0
5	0.48	0	3.15	3.15	1.58	1.58	5.51	5.51	5.41	5.41	5.49	5.51	5.47	5.47	0	0
6	0.48	0	3.15	3.15	1.3	0	5.51	5.51	5.41	5.42	5.49	5.51	5.47	5.47	4.59	4.57
7	5.17	5.17	3.15	3.15	0	0	5.51	5.51	5.41	5.41	5.49	0	5.47	5.47	1.84	1.82
8	2.22	2.21	2.43	2.42	3.24	3.24	11.95	11.95	11.95	11.95	11.95	11.95	11.95	11.95	0	0
9	2.35	2.35	2.48	2.46	0	0									1.84	1.82
10	0	0	2.43	2.42	3.2	3.19										
11	2.26	2.24	2.48	0	4.85	4.84										
12	2.46	2.45	0	0	2.31	0										
13	0	0	0	0	2.35	0										
14	5.17	5.16	0	0	2.35	0										
15	5.17	5.16	2.43	2.43	0	0										
16	5.1	5.06	2.47	3.14	0	0										
17	0	0	2.45	0	4.91	0										
18	0	0	0	0	2.34	2.34										
19	5.16	5.16	4.91	4.88	2.34	2.33										
20	5.14	5.14	0	0	0	0										
21	5.01	5.02	0	0												
22	0	0	0	0												
23	0	0	4.91	0												
24	0	0	0	0												
25	2.68	2.68	4.9	4.88												
26	5.17	5.17	0	0												
27	5.17	5.17	0	0												
28	4.77	4.87	0	0												
29	5.07	5.06	0	0												
30	21.58	18	4.91	4.88												
31	23.58	18	0	0												
32	23.6	23	4.91	4.88												
33	27.54	21.21	0	0												
34	23.6	17.18	0.36	0												
35	23.6	22.91	0	0												
36	21.6	19.14	3.24	3.23												
37	21.61	25.01	3.19	3.19												
38	23.65	23.06	2.93	3.92												
39	23.65	23.09	0	0												
40	23.57	23.08	0	0												
41	25.6	23.07	1.3	1.31												
42	25.6	25.03	1.48	1.47												
43	25.6	25.03	1.57	0												
44	25.6	23.07	1.58	1.58												
45	27.6	25.07	0	0												
46	27.6	21.16	3.15	3.15												
47	27.5	25.11	0	0												
48	27.5	24.76	0	0												
49	27.5	27.86	0	0												
50	27.5	26.88	0	0												
51	6.73	6.69	3.15	3.14												
52	25.7	25.13	0	0												
53	25.6	25.08														
54	25.6	25.16														
55	25.6	25.15														
56	25.6	25.08														
57	25.6	25.13														
58	27.7	27.08														
59	5.16	5.15														
60	5.16	5.16														
61	5.16	5.16														
62	5.16	5.16														
63	0	0														
64	0	0														


PIN	IC503		IC502		IC2A4		IC2A2		IC206		IC504		IC506	
	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY
1	0	0	0	0	4.87	4.39	1.57	1.56	2.63	2.64	2.11	2.19	(IN)0	0
2	3.1	3.1	5.03	5.03	2.3	2.31	1.57	1.56	2.74	0	5.05	5.05	(OUT)1.80	0
3	5.03	5.03	0	0	2.29	2.29	1.57	0	2.74	2.76	2.37	2.44		
4	0	0	5.1	5.1	0	0	0	0	0	0	0	0		
5	0	0	0	0	2.29	2.29	1.62	1.62	1.92	1.88				
6	0	0	5.04	5.04	2.3	2.31	1.62	1.62	2.28	0				
7	5.05	5.05	0	0	2.51	2.45	1.62	1.62	2.28	0				
8	0	3.15	5.03	5.04	5.02	5.02	5.04	4.99	5.04	0				
9	0	0												
10	0	0												
11	0	0.46												
12	0	0.15												
13	3.11	3.1												
14	0	0												
15	0	0												
16	0	0												
17	3.09	3.09												
18	5.15	5.14												
19	0	0												
20	5.15	5.15												

Q2M1	Q2A1		Q2A5		Q2A6		Q2A2		
	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	
E	0	0	5.02	0	2.41	2.34	2.35	5.02	4.95
B	0	0	0	0	3.62	3.72	3.82	0	0
C	0	3.14	0	0	0	3.1	0	5.01	4.94

PIN	Q610		Q611		Q609		Q613		Q614		Q612	
	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY	STOP	PLAY
Emitter	0	0	0	0	0	0	0	0	0	0	0	0
Collector	0	0	0	0	0	0	0	0	0	0	0	0
Base	0.77	0.78	0.77	0.77	0.76	0.77	0.76	0.77	0.77	0.77	0.76	0.79

PRINTED CIRCUIT DIAGRAMS


1. MAIN P.C.BOARD (TOP VIEW)

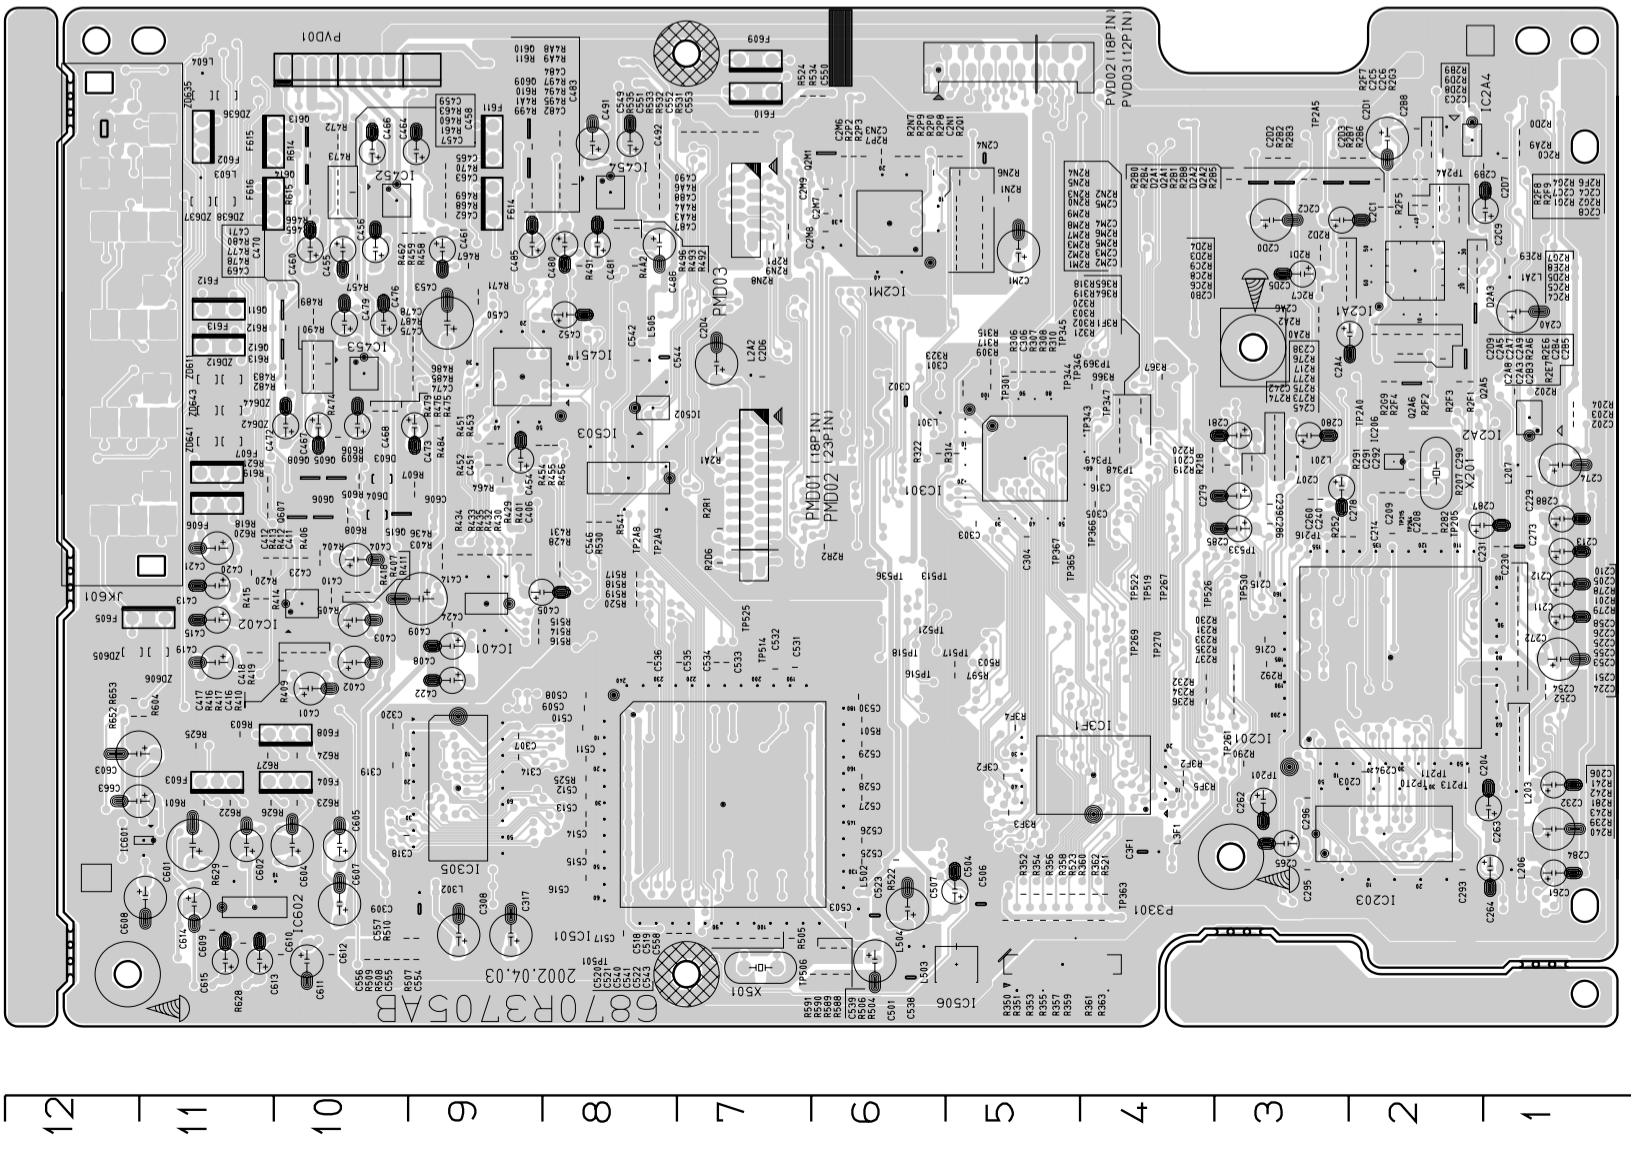

LOCATION GUIDE

C201	L4	C2C4	N2	N10	C552	07	L503	16	R289	02	R320	L4	R473	N10	R614	N10
C202	L1	C2C5	N2	N10	C553	07	L504	16	R2C0	N1	R321	L4	R474	L10	R615	L10
C203	J2	C2C6	N2	N10	C554	H9	L505	M8	R2C4	M2	R322	M5	R475	M10	R618	L11
C204	J2	C2C7	N2	N10	C555	H9	L603	N11	R2C5	M2	R323	M5	R476	M10	R619	L11
C205	K1	C2C8	N2	N10	C556	H10	L604	O11	R2C6	M3	R350	M5	R477	M10	R620	L11
C206	J1	C2C9	N1	N10	C557	L7	PXD01	H5	R2C7	M3	R351	M5	R478	M10	R621	L11
C207	L3	C2D0	N3	N10	C558	L7	PXD02	H5	R2C8	M3	R352	M5	R479	M10	R622	J11
C208	L2	C2D1	O2	N10	C601	H11	PXD03	N7	R2C9	N3	R353	M5	R480	M10	R623	J10
C209	L2	C2D2	N3	N10	C602	H11	PXD03	N7	R2D0	O1	R354	M5	R482	M10	R624	J10
C210	K1	C2D3	N3	N10	C603	H11	PXD01	O10	R2D1	N3	R355	M5	R483	M10	R625	J11
C211	K1	C2D4	M7	N10	C604	H10	PXD02	O6	R2D2	N3	R356	M5	R484	L9	R626	J11
C212	K1	C2D5	N3	N10	C605	L9	Q2A1	N3	R2D3	N3	R357	M5	R485	M9	R627	J11
C213	K1	C2D6	M7	N10	C606	L9	Q2A5	M2	R2D4	N3	R358	M5	R486	M9	R628	J11
C214	L2	C2D7	N1	N10	C607	H11	Q2A5	M2	R2D5	N2	R359	M5	R487	M9	R629	J11
C215	K3	C2D9	M2	N10	C608	H11	Q2A6	M2	R2D6	K7	R360	M4	R489	M10	R652	J12
C216	K3	C2M1	N5	N10	C609	H11	Q2M1	N6	R2D8	O2	R361	M4	R490	M10	R653	J12
C224	J1	C2M2	N5	N10	C610	H10	Q605	N6	R2D9	O2	R362	M4	R491	N8	TP201	J3
C225	K1	C2M3	N5	N10	C611	H10	Q606	L10	R2E6	M2	R363	M4	R492	N8	TP205	L2
C226	K1	C2M4	N5	N10	C612	H10	Q607	L10	R2E7	M2	R364	M4	R493	N8	TP215	L2
C229	L1	C2M5	N5	N10	C613	H11	Q608	L10	R2E8	N2	R365	M4	R494	N8	TP216	L3
C230	L1	C2M6	N6	N10	C614	H11	Q609	N9	R2E9	N2	R366	M4	R495	N8	TP261	J3
C231	L1	C2M7	N6	N10	C615	H11	Q610	O9	R2F1	M2	R367	M4	R496	N8	TP264	J3
C232	J1	C2M8	N6	N10	C663	N8	D2A1	N3	R2F2	M2	R368	M4	R497	N8	TP267	K4
C238	L3	C2M9	N6	N10	C663	N8	D2A1	N3	R2F3	M2	R369	M4	R499	N8	TP269	K4
C239	L3	C2N1	N5	N10	C613	H11	Q613	O10	R2F4	M2	R372	M4	R499	N8	TP270	K4
C240	L3	C2N3	N5	N10	C614	H11	Q613	O10	R2F5	M2	R373	M4	R499	N8	TP270	K4
C242	L3	C2N4	N5	N10	C603	H10	Q615	L10	R2F6	N2	R374	M4	R499	N8	TP270	K4
C245	L3	C301	M5	N10	D604	L10	R201	K1	R2F7	N2	R401	K9	R499	N8	TP2A5	O3
C251	K1	C302	M6	N10	F602	O11	R202	M1	R2F8	N2	R402	K9	R499	N8	TP2A8	L8
C252	J1	C303	L5	N10	F603	J11	R204	M1	R2F9	N2	R404	K10	R499	N8	TP2A9	L8
C253	K1	C304	L5	N10	F604	O11	R204	M1	R2G1	N2	R405	K10	R499	N8	TP2A9	L8
C254	K1	C305	L7	N10	F605	K11	R207	L2	R2G2	N2	R406	K10	R501	J6	TP2T1	J2
C255	K1	C306	M5	N10	F606	L11	R217	L3	R2G3	N2	R407	K10	R503	K5	TP2T3	J2
C258	K1	C307	J9	N10	F607	L11	R218	L3	R2G4	N2	R409	K10	R504	K6	TP301	M5
C260	L3	C308	I9	N10	F608	O11	R219	L4	R2G5	N2	R410	K10	R505	L7	TP3A3	M4
C261	L1	C309	I9	N10	F609	J7	R220	L4	R2G6	N2	R411	K10	R506	L6	TP3A4	M5
C262	J3	C314	J9	N10	F610	O7	R230	K3	R2M1	N5	R412	K10	R507	H10	TP3A5	M5
C263	J1	C316	L4	N10	F611	O11	R231	K4	R2M2	N5	R413	K10	R508	H10	TP3A7	M4
C264	L1	C317	L9	N10	F612	M11	R232	K4	R2M3	N5	R414	K10	R509	H10	TP3A7	M4
C265	L3	C318	I10	N10	F613	N9	R233	J3	R2M4	N5	R415	K11	R510	L9	TP3A8	L4
C272	K1	C319	J10	N10	F614	J11	R234	J4	R2M5	N5	R416	K11	R514	K9	TP3A9	L4
C273	L1	C320	J10	N10	F615	O11	R235	J3	R2M6	N5	R417	K10	R515	K9	TP3A9	L4
C274	L1	C3F1	L4	N10	F616	O10	R236	J4	R2M7	N5	R417	K10	R515	K9	TP3A9	L4
C278	L3	C3F2	J5	N10	IC201	K2	R237	J3	R2M8	N5	R418	K11	R516	K9	TP3A9	L4
C279	L3	C401	J10	N10	IC203	L2	R239	J1	R2M9	N5	R419	K11	R517	K8	TP366	L4
C280	L3	C402	K10	N10	IC205	L8	R240	J1	R2N0	N5	R420	K11	R518	K8	TP367	L5
C281	L1	C403	K10	N10	IC206	L8	R241	J1	R2N1	N5	R421	K11	R519	K8	TP369	M4
C282	L1	C404	K10	N10	IC207	L8	R242	J1	R2N2	N5	R422	K11	R520	K8	TP501	L8
C285	L3	C404	K10	N10	IC208	L8	R243	J1	R2N3	N5	R423	K11	R520	K8	TP501	L8
C286	L3	C406	K9	N10	IC209	L8	R244	J1	R2N4	N5	R424	K11	R521	L4	TP506	L6
C287	L2	C408	K9	N10	IC210	L8	R245	J1	R2N5	N5	R425	K11	R522	L6	TP513	K6
C288	L1	C409	K9	N10	IC211	L8	R246	J1	R2N6	N5	R426	K11	R524	L6	TP514	K7
C290	L2	C410	K10	N10	IC212	L8	R247	J1	R2N7	N5	R427	K11	R524	L6	TP514	K7
C291	L2	C411	K10	N10	IC213	L8	R248	J1	R2N8	N5	R428	K11	R524	L6	TP514	K7
C292	L2	C412	K11	N10	IC214	L8	R249	J1	R2N9	N5	R429	K11	R524	L6	TP514	K7
C293	L2	C413	K11	N10	IC215	L8	R250	J1	R2P0	N6	R430	K11	R524	L6	TP514	K7
C294	J2	C414	K9	N10	IC216	L8	R251	J1	R2P1	N6	R431	K11	R524	L6	TP514	K7
C295	L3	C415	K11	N10	IC217	L8	R252	J1	R2P2	N6	R432	K11	R524	L6	TP514	K7
C296	J3	C416	K10	N10	IC218	L8	R253	J1	R2P3	N6	R433	K11	R524	L6	TP514	K7
C240	M1	C417	K10	N10	IC219	L8	R254	J1	R2P4	N6	R434	K11	R524	L6	TP514	K7
C242	M2	C418	K11	N10	IC220	L8	R255	J1	R2P5	N6	R435	K11	R524	L6	TP514	K7
C244	M2	C419	K11	N10	IC221	L8	R256	J1	R2P6	N6	R436	K11	R524	L6	TP514	K7
C245	M2	C420	K11	N10	IC222	L8	R257	J1	R2P7	N6	R437	K11	R524	L6	TP514	K7
C246	M3	C421	L11	N10	IC223	L8	R258	J1	R2P8	N6	R438	K11	R524	L6	TP514	K7
C247	M2	C422	K9	N10	IC224	L8	R259	J1	R2P9	N6	R439	K11	R524	L6	TP514	K7
C248	M2	C423	K10	N10	IC225	L8	R260	J1	R2P0	N6	R440	K11	R524	L6	TP514	K7
C249	M3	C424	K9	N10	IC226	L8	R261	J1	R2P1	N6	R441	K11	R524	L6	TP514	K7
C250	M3	C450	M9	N10	IC227	L8	R262	J1	R2P2	N6	R442	K11	R524	L6	TP514	K7
C253	M2	C451	L9	N10	IC228	L8	R263	J1	R2P3	N6	R443	K11	R524	L6	TP514	K7
C254	M2	C452	M8	N10	IC229	L8	R264	J1	R2P4	N6	R444	K11	R524	L6	TP514	K7
C255	M2	C453	M9	N10	IC230	L8	R265	J1	R2P5	N6	R445	K11	R524	L6	TP514	K7
C258	O1	C454	L9	N10	IC231	L8	R266	J1	R2P6	N6	R446	K11	R524	L6	TP514	K7
C259	O1	C455	N10	N10	IC232	L8	R267	J1	R2P7	N6	R447	K11	R524	L6	TP514	K7
C2C1	N3	C457	N10	N10	IC233	L8	R268	J1	R2P8	N6	R448	K11	R524	L6	TP514	K7
C2C2	N2	C457	N10	N10	IC234	L8	R269	J1	R2P9	N6	R449	K11	R524	L6	TP514	K7
C2C3	N2	C458	N10	N10	IC235	L8	R270	J1	R2P0	N6	R450	K11	R524	L6	TP514	K7

1. MAIN P.C.BOARD (BOTTOM VIEW)

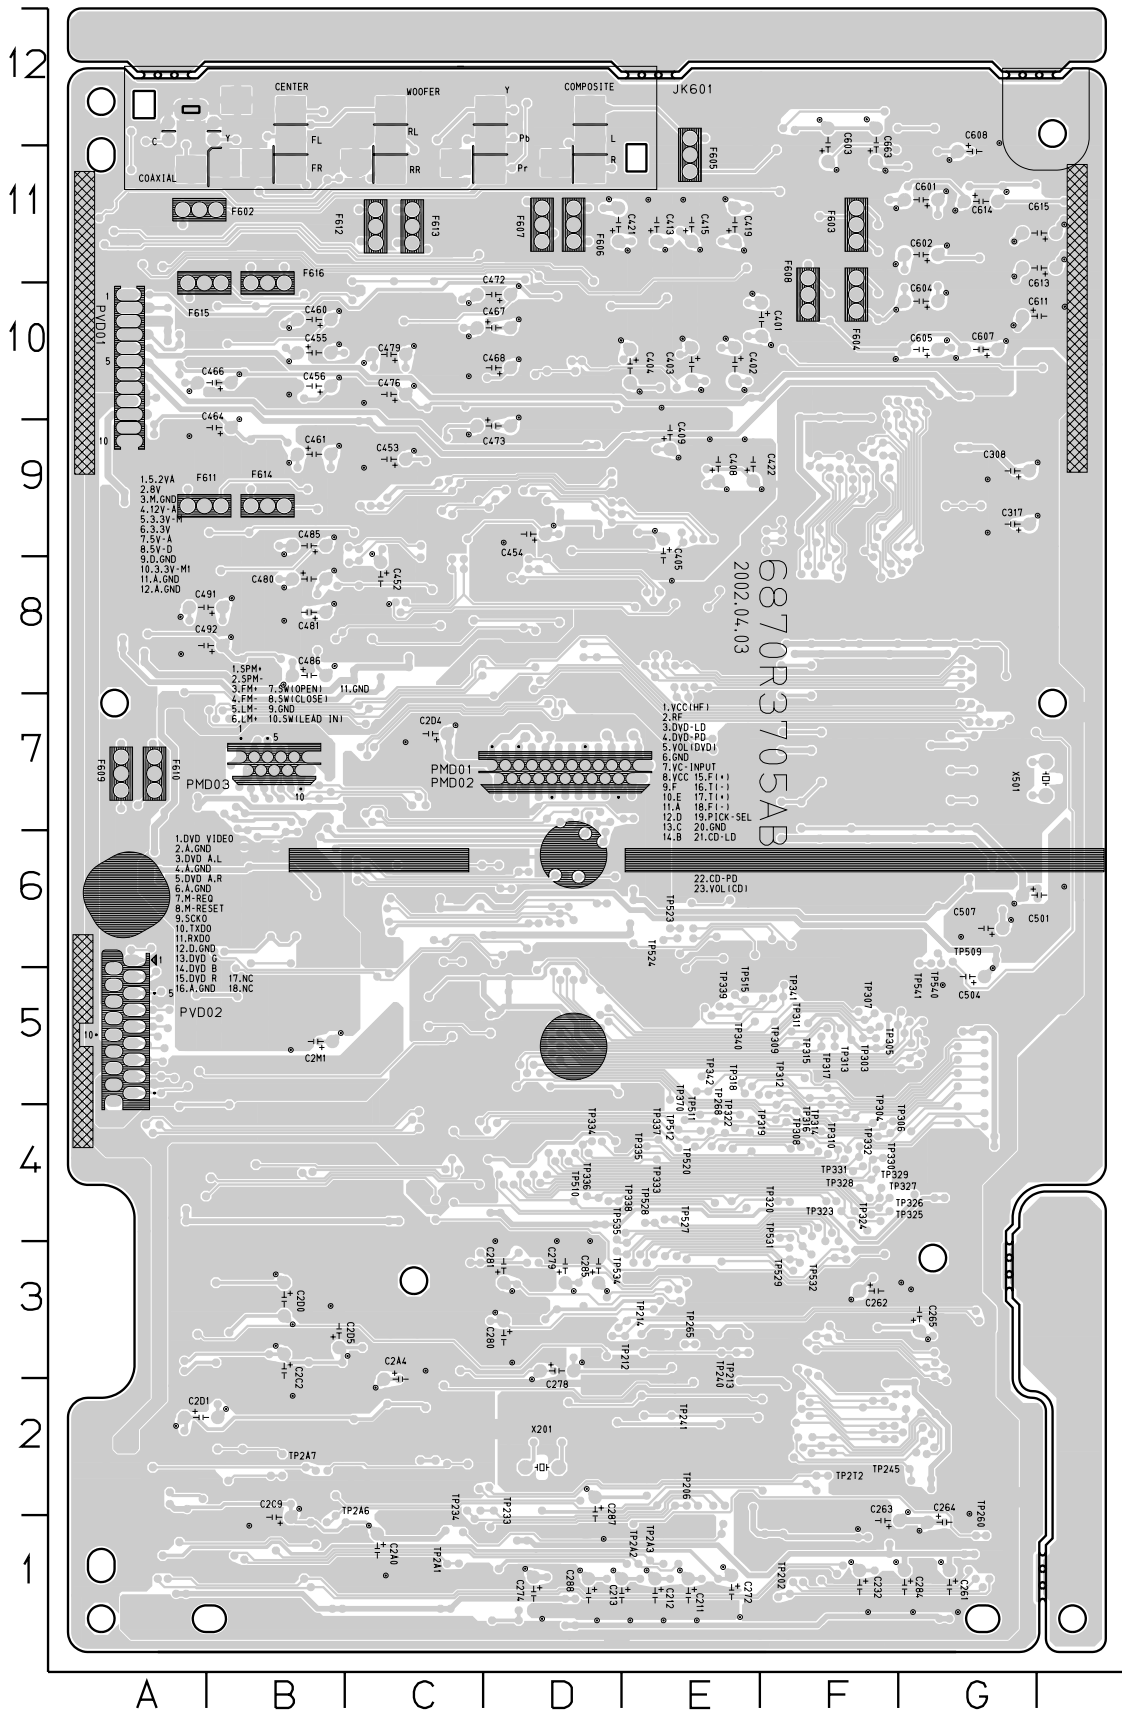

LOCATION GUIDE

TP202	F1
TP206	E2
TP212	E3
TP213	E3
TP214	E3
TP233	D2
TP234	C2
TP240	E3
TP241	E2
TP245	G2
TP260	G1
TP265	E3
TP268	E4
TP2A1	E1
TP2A2	E1
TP2A3	E1
TP2A6	B1
TP2A7	B2
TP2T2	F2
TP303	F5
TP304	F4
TP305	F5
TP306	F4
TP307	F5
TP308	F4
TP309	F5
TP310	F4
TP311	F5
TP312	F5
TP313	F5
TP314	F4
TP315	F5
TP316	F5
TP317	F5
TP318	E5
TP319	E4
TP320	F4
TP322	E4
TP323	F4
TP324	F4
TP325	F4
TP326	F4
TP327	F4
TP328	F4
TP329	F4
TP330	F4
TP331	F4
TP332	F4
TP333	E4
TP334	D4
TP335	E4
TP336	E4
TP337	F4
TP338	D4
TP339	E5
TP340	E5
TP341	F5
TP342	E5
TP370	E6
TP509	G6
TP510	D4
TP511	E4
TP512	E4
TP515	E5
TP520	E4
TP523	E6
TP524	E6
TP527	E4
TP528	F3
TP529	F3
TP531	F4
TP532	F3
TP533	D3
TP534	D3
TP535	D4
TP540	G6
TP541	G6

SECTION 4 MECHANISM OF VCR PART

CONTENTS

DECK MECHANISM PARTS LOCATIONS

- Top View4-1
- Bottom View4-1

DECK MECHANISM DISASSEMBLY

1. Drum Assembly4-2
2. Plate Top.....4-4
3. Holder Assembly CST4-4
4. Opener Door4-4
5. Bracket Assembly L/D Motor.....4-4
6. Gear Assembly Rack F/L.....4-4
7. Arm Assembly F/L.....4-4
8. Lever Assembly S/W4-4
9. Arm Assembly Cleaner.....4-5
10. Head F/E4-5
11. Base Assembly A/C Head4-5
12. Brake Assembly T4-6
13. Brake Assembly RS4-6
14. Arm Assembly Tension4-6
15. Reel S / Reel T.....4-6
16. Base Assembly P44-7
17. Opener Lid4-7
18. Arm Assembly Pinch4-7
19. Lever T/up / Arm T/up4-7
20. Belt Capstan/Motor Capstan4-8
21. Lever F/R4-8
22. Clutch assembly D354-8
23. Brake Assembly Capstan4-8
24. Gear Drive/Gear Cam4-9
25. Gear Sector4-9
26. Plate Slider4-9
27. Lever Tension4-9
28. Lever Spring4-9
29. Gear Assembly P2/
Gear Assembly P34-10
30. Base Assembly P2/
Base Assembly P34-10
31. Base Loading4-11
32. Base Tension4-11
33. Arm Assembly Idler Jog4-11

DECK MECHANISM ADJUSTMENT

- Tools and Fixtures for Service.....4-12

1. Mechanism a Alignment position
Check4-13
2. Preparation for Adjustment.....4-14
3. Checking Torque4-14
4. Guide Roller Height Adjustment.....4-15
 - 4-1. Preliminary Adjustment4-15
 - 4-2. Precise Adjustment4-15
5. Audio/Control (A/C) Head Adjustment4-16
 - 5-1. Preliminary Adjustment4-16
 - 5-2. Confirmation of Tape Path between
Pinch Roller and Take-up Guide4-17
 - 5-3. Precise Adjustment(Azimuth Adjustment)
.....4-17
6. X-Value Adjustment.....4-17
7. Adjustment after Replacing Drum Assembly
(Video Heads)4-18
8. Check the Tape Travel after Reassembling
Deck Assembly.....4-18
 - 8-1. Checking Audio and RF Locking Time
during Playback after CUE or REV
.....4-18
 - 8-2. Check for Tape Curling or Jamming
.....4-18

MAINTENANCE/INSPECTION PROCEDURE

1. Check before starting Repairs4-19
2. Required Maintenance4-20
3. Scheduled Maintenance.....4-20
4. Supplies Required for Inspection and
Maintenance.....4-20
5. Maintenance Procedure4-20
 - 5-1. Cleaning4-20
 - 5-2. Greasing4-21

MECHANISM TROUBLESHOOTING GUIDE


1. Deck Mechanism.....4-23
2. Front Loading Mechanism.....4-26

EXPLODED VIEWS


1. Front Loading Mechanism Section4-28
2. Moving Mechanism Section (1).....4-29
3. Moving Mechanism Section (2).....4-30

DECK MECHANISM PARTS LOCATIONS

• Top View

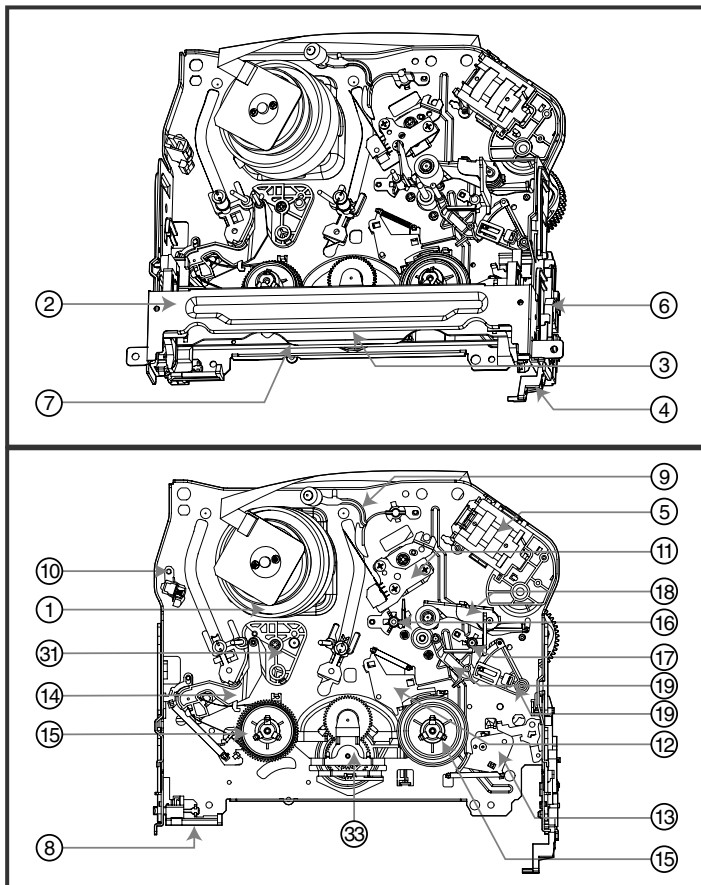

• Bottom View

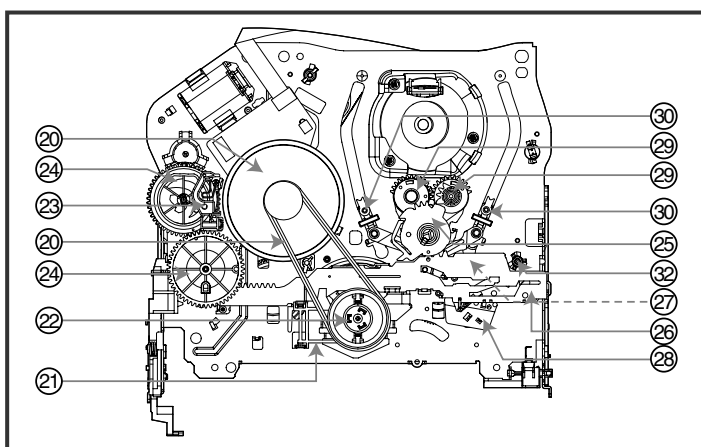

NOTE : When reassembly perform the procedure in the reverse order.

- 1) When reassembling, confirm Mechanism and Mode Switch Alignment Position (Pefer to Page 4-14)
- 2) When disassembling, the Parts for Starting No. Should be removed first.

Starting No.	Part	Fixing Type	Figure	
1	Drum Assembly	3 Screw	A-1	T
2	Plate Assembly Top	2 Hook	A-2	T
2	3 Holder Assembly CST	Chassis Hole	A-2	T
2	4 Opener Door	Chassis Hole	A-2	T
	5 Bracket Assembly L/D Motor	3 Hook	A-2	T
2,3,4	6 Gear Assembly Rack F/L	1 Hook, Chassis Hole	A-2	T
2,3,4,6	7 Arm Assembly F/L	Chassis Hole	A-2	T
	8 Lever Assembly S/W	1 Hook	A-2	T
	9 Arm Assembly Cleaner	Chassis Embossing	A-3	T
	10 Head F/E	Chassis Embossing	A-3	T
	11 Base Assembly A/C Head	1 Screw	A-3	T
2,3	12 Brake Assembly RS	1 Hook	A-4	T
2,3	13 Brake Assembly T	1 Hook	A-4	T
2,3	14 Arm Assembly Tension	2 Hook	A-4	T
2,3,12,13,14	15 Reel S/Reel T		A-4	T
	16 Base Assembly P4	Chassis Embossing	A-5	T
	17 Opener Lid	Chassis Embossing	A-5	T
17	18 Arm Assembly Pinch	Shaft	A-5	T
17	19 Lever T/Up / Arm T/Up	1 Hook	A-5	T
17,18	20 Belt Capstan/Motor Capstan	3 Screw	A-6	B
	21 Lever F/R	Locking Tab	A-6	B
20,21	22 Clutch Assembly D35	Washer	A-6	B
	23 Break Assembly Capstan	Locking Tab	A-6	B
	24 Gear Drive/Gear Cam	Washer/Hook	A-7	B
	25 Gear Sector	1 Hook	A-7	B
20,21,23,24,25	26 Plate Slider	Shaft Guide	A-7	B
20,21,23,24,25,26	27 Lever Tension	1 Hook	A-7	B
2,3,14,20,21,25,23,24,26	28 Lever Spring	Locking Tab	A7	B
25	29 Gear Assembly P2/Gear Assembly P3	Boss	A-8	B
2,3,14,25,29	30 Base Assembly P2/Base Assembly P3	Chassis Slot	A-8	B
2,3,14,25,29	31 Base Loading	1 Screw	A-9	T
2,3,14	32 Base Tension	Chassis Embossing	A-9	B
2,3,20,21,22	33 Arm Assembly Idler	Locking Tab	A-9	T

R: Top, B:Bottom

DECK MECHANISM DISASSEMBLY

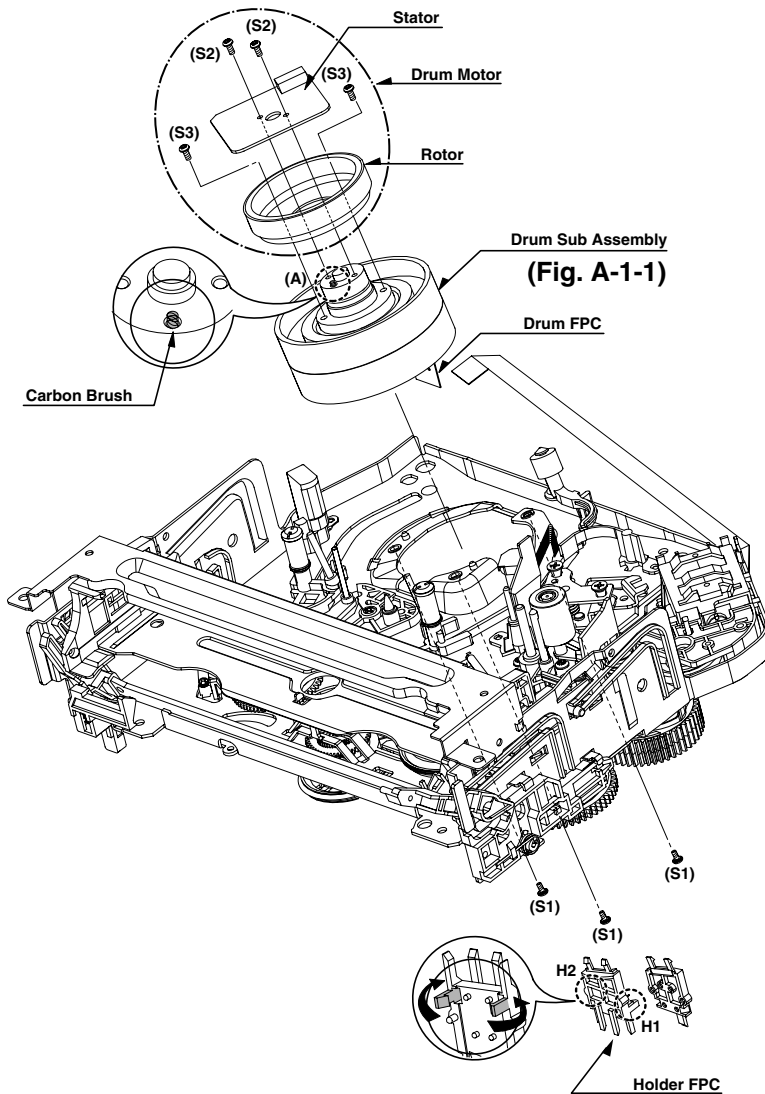


Fig. A-1

1. Drum Assembly (Fig. A-1-1)

- 1) Unplug the Drum FPC Connector.
- 2) Remove three Screws(S1) on bottom side and separate the Drum assembly.
- 3) Unhook (H1), (H2) and separate the Holder FPC and Cap FPC.


1-1. Drum Motor

- 1) Remove two Screws(S2) and disassemble the Stator of the Drum Motor.
- 2) Remove two Screws(S3) and separate the Rotor of the

NOTE

Drum Motor from the Drum Sub assembly.
When reassembling, confirm (A) portion of the Drum Sub assembly whether the Carbon Brush is in there or not.

(Fig. B-1)

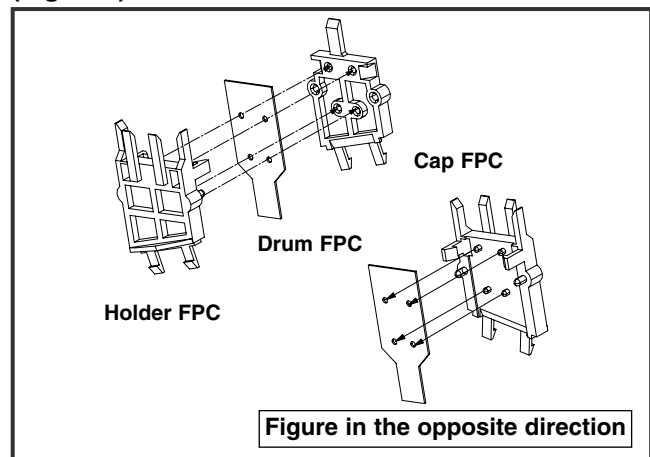

DECK MECHANISM DISASSEMBLY

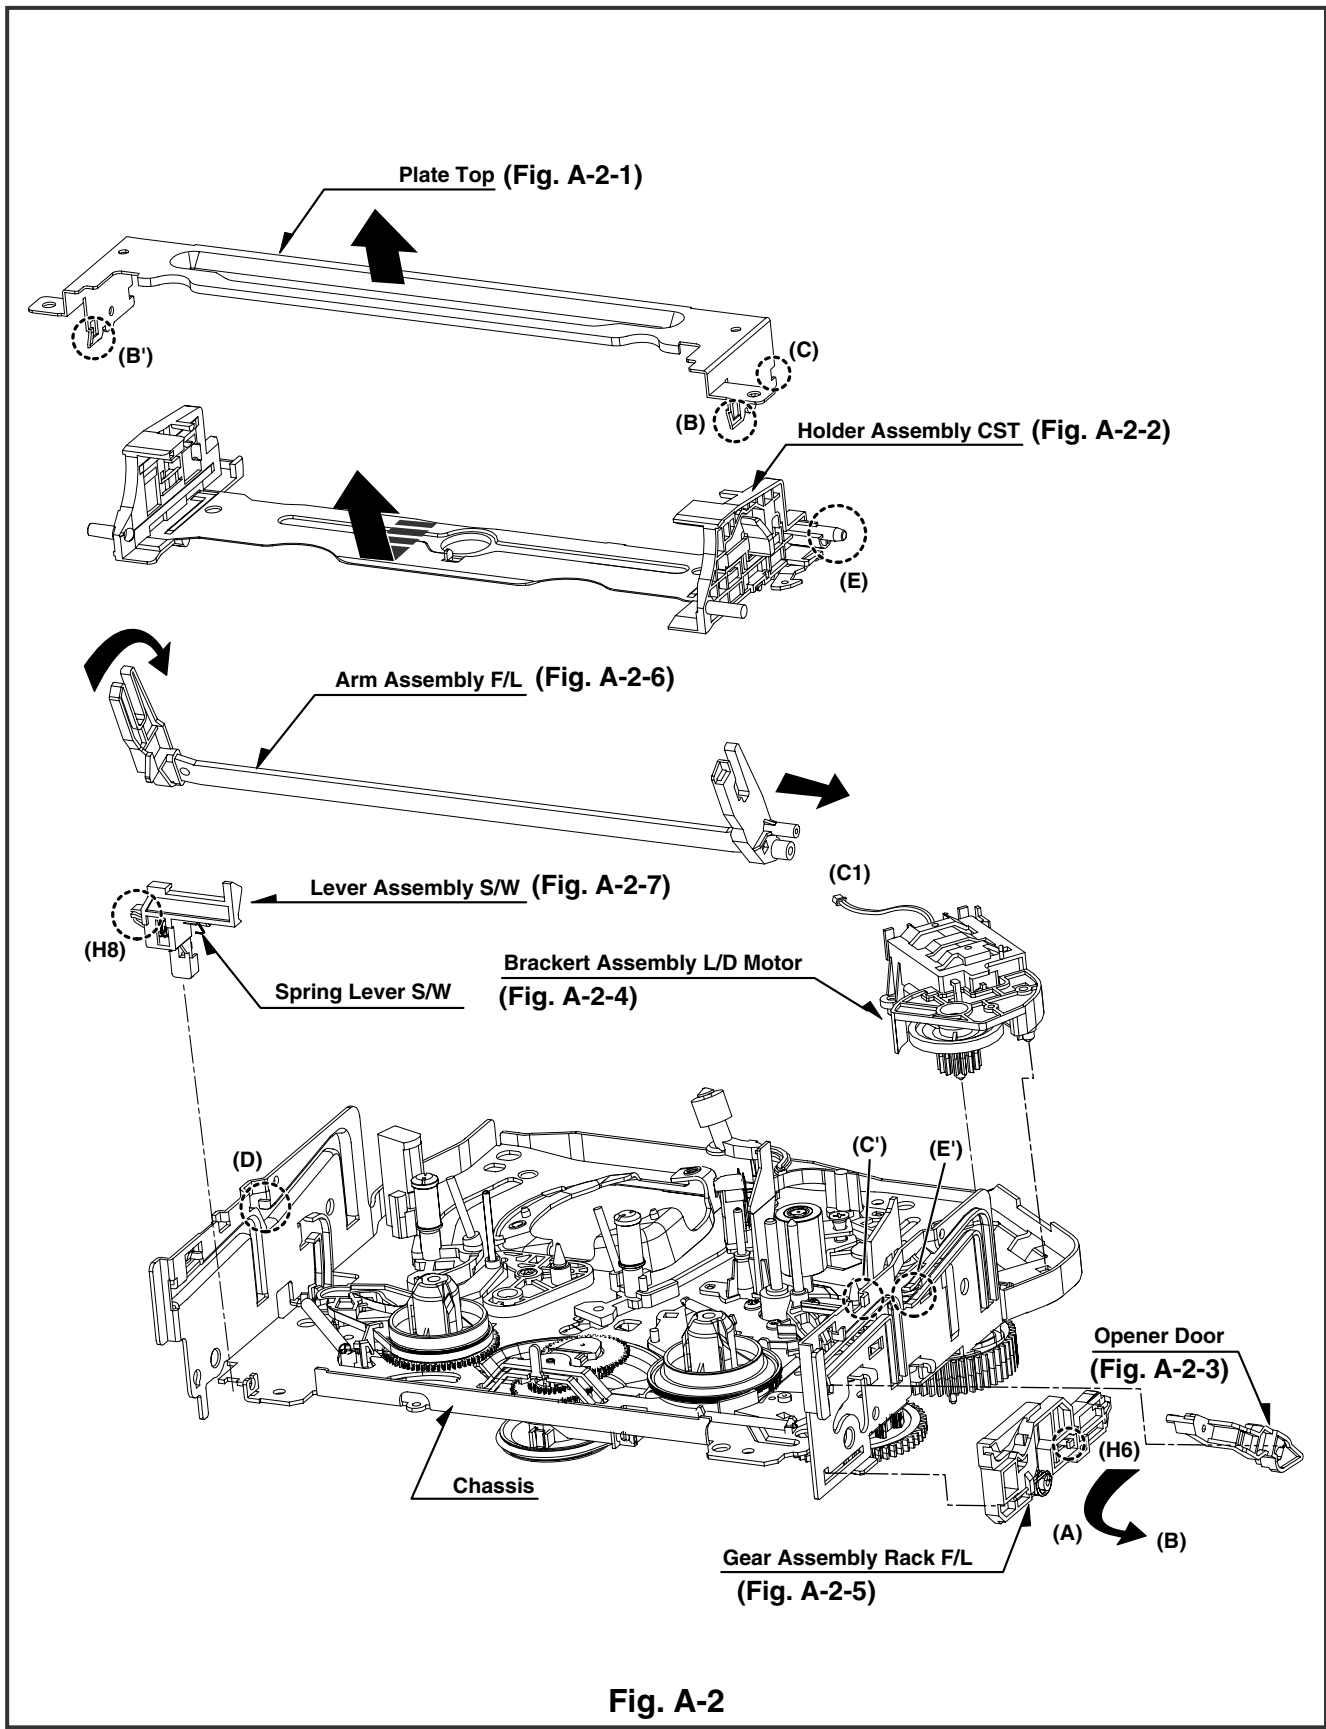


Fig. A-2


DECK MECHANISM DISASSEMBLY

2. Plate Top (Fig. A-2-1)

- 1) Pull the (B) portion of the Plate Top back in direction of arrow and separate the right side of it.
- 2) pull the (B') portion of the Plate Top back in direction of arrow and separate the left side of it.
(Used tools : (-) type Drive, anything tool with sharp point or flat point.)


NOTE

- 1) When reassembling, push the Plate Top after alignment the two position(C), (C') as Fig.

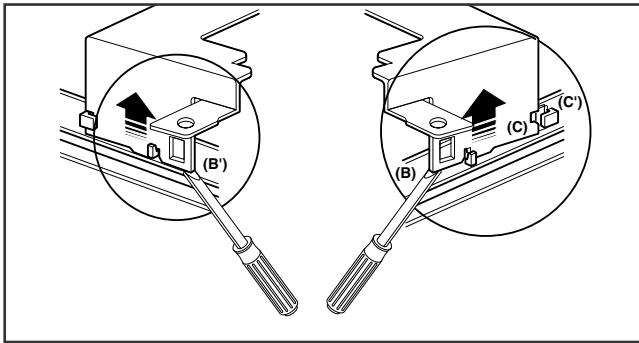

3. Holder Assembly CST (Fig.A-2-2)

- 1) Move the Holder assembly CST in direction of arrow and separate the left side of it first through the (D) position of the Chassis.

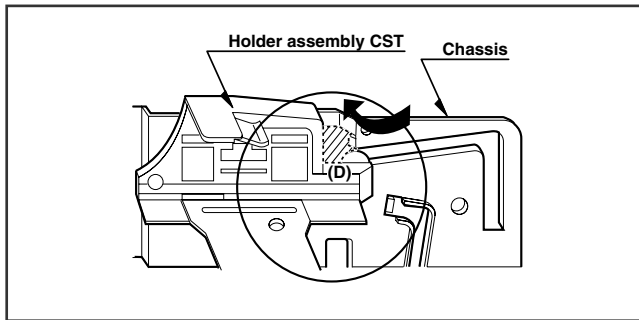

- 2) Disassemble the right side of the Holder assembly CST from each guided hole of the Chassis.

NOTE

When reassembling, insert the (E) part of the Holder assembly CST in the (E') hole of the Chassis first and assemble the left side of it.


4. Opener Door (Figure. A-2-3)

- 1) Turn the Opener Door clockwise and remove it through the guide hole of the chassis.

5. Bracket assembly L/D Motor(Fig. A-2-4)

- 1) Unplug the Connector(C1).

- 2) Unhook three Hooks(H3,H4,H5) on bottom side of the Chassis, lift up the Bracket assembly L/M and disassemble the Bracket assembly L/D Motor.

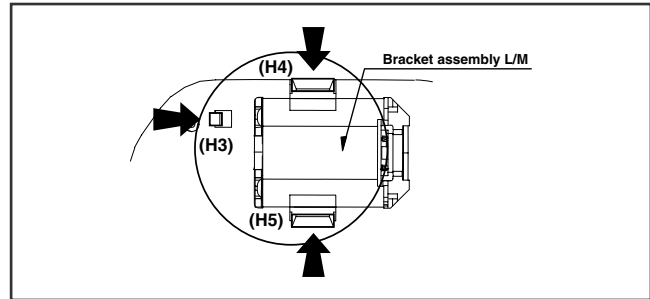


6. Gear Assembly Rack F/L (Fig. A-2-5)

- 1) Move the Gear Assembly Rack F/L in direction of arrow(A) and unhook the Hook(H6) pulling back in front.
- 2) Separate the Rear Rack F/L in direction of arrow(B).

NOTE

When reassembling, align the Gear part of the Gear Assembly Rack F/L with the Gear Drive as below Fig.

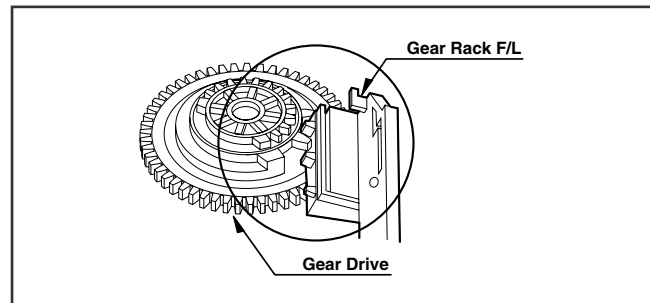


7. Arm assembly F/L (Fig. A-2-6)

- 1) Move the Arm assembly F/L in direction of arrow and separate the left side of it first.
- 2) Disassemble the Arm assembly F/L from each guided Hole of the Chassis.

8. Lever assembly S/W(Fig. A-2-7)

- 1) Hook the Spring Lever S/W on the Hook(H7) first as below Fig.
- 2) Unhook the Hook(H8) in the left side of the Chassis and move the Lever assembly S/W.

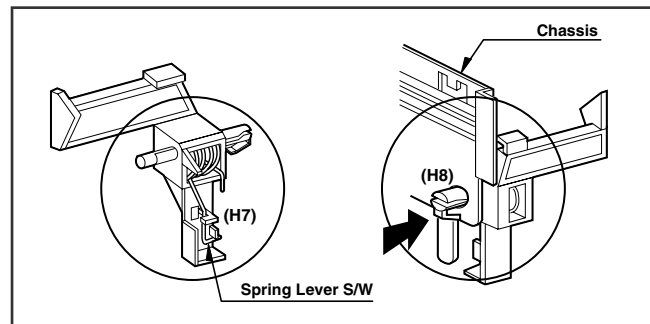

DECK MECHANISM DISASSEMBLY

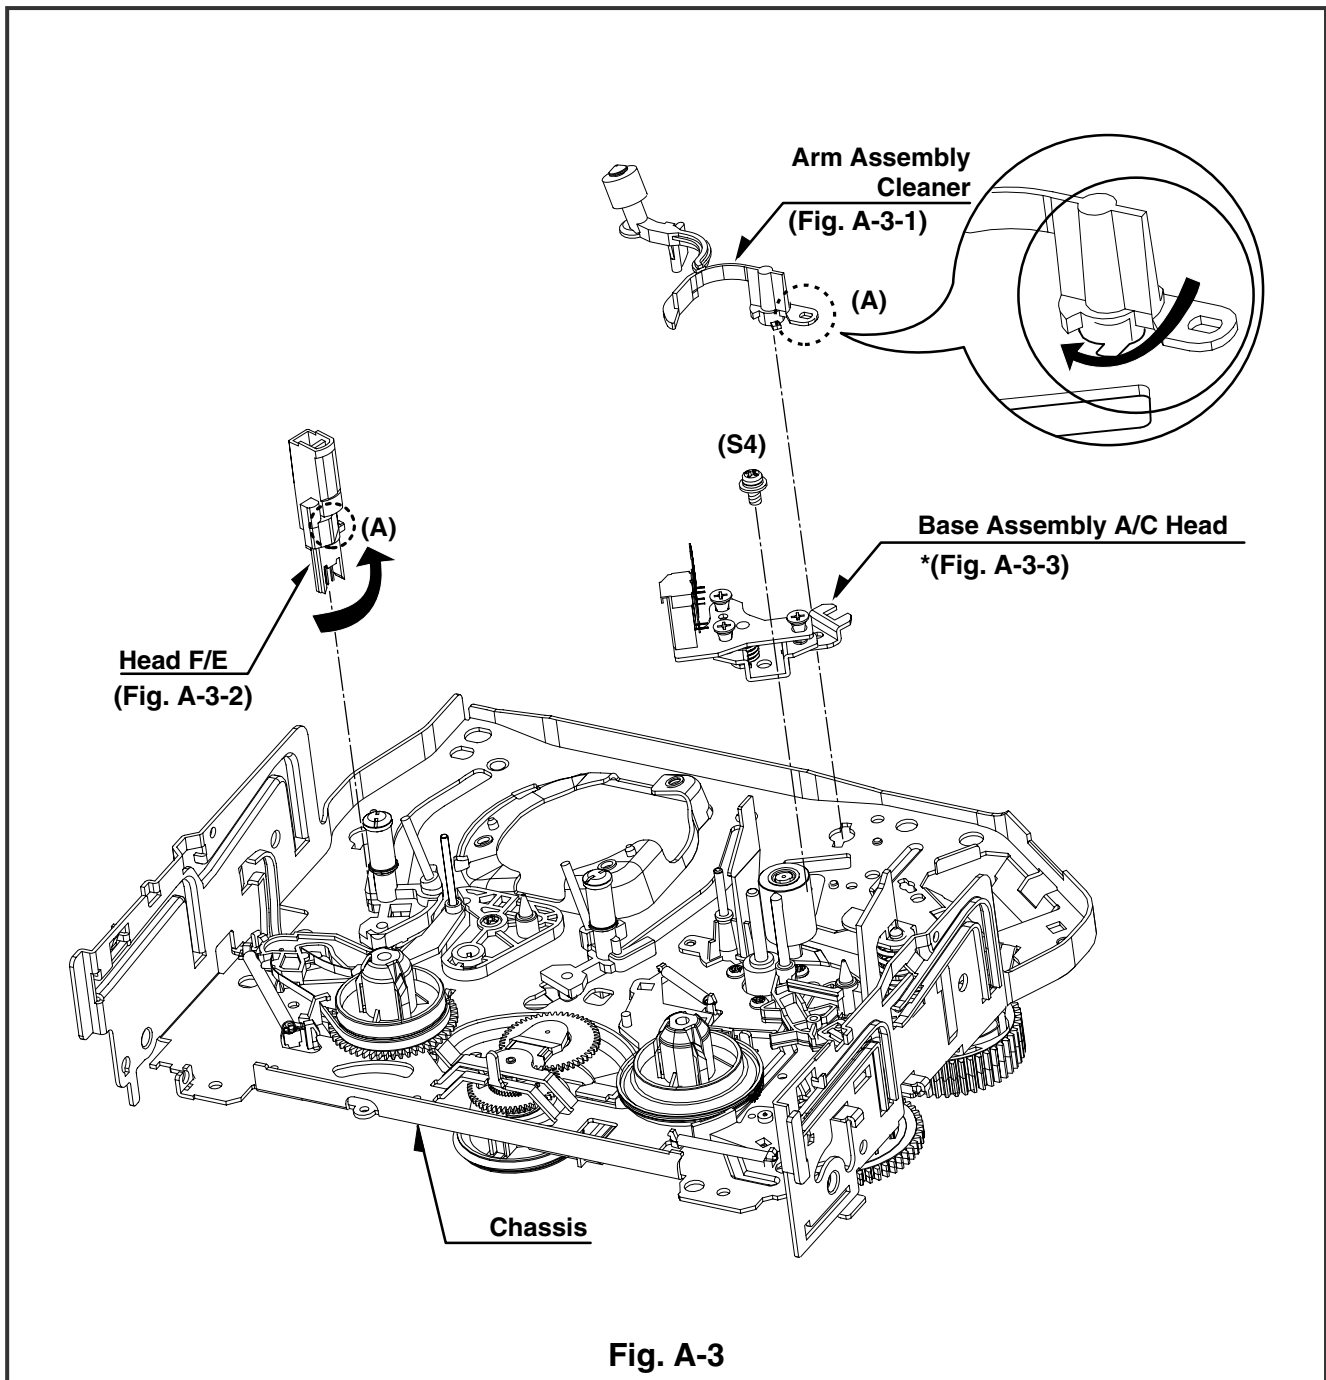


Fig. A-3

9. Arm assembly Cleaner (Fig. A-3-1)

- 1) Breakaway the (A) portion as Fig. A-3-1 from the Embossing of the Chassis, turn the Arm assembly Cleaner to clockwise direction and lift it up.

10. Head F/E (Fig. A-3-2)

- 1) Breakaway the (A) portion of the Head F/E from the Embossing of the Chassis, turn it to counterclockwise direction and lift it up.

11. Base assembly A/C Head (Fig. A-3-3)

- 1) Remove the Screw(S4) and lift the Base assembly A/C Head up.

DECK MECHANISM DISASSEMBLY

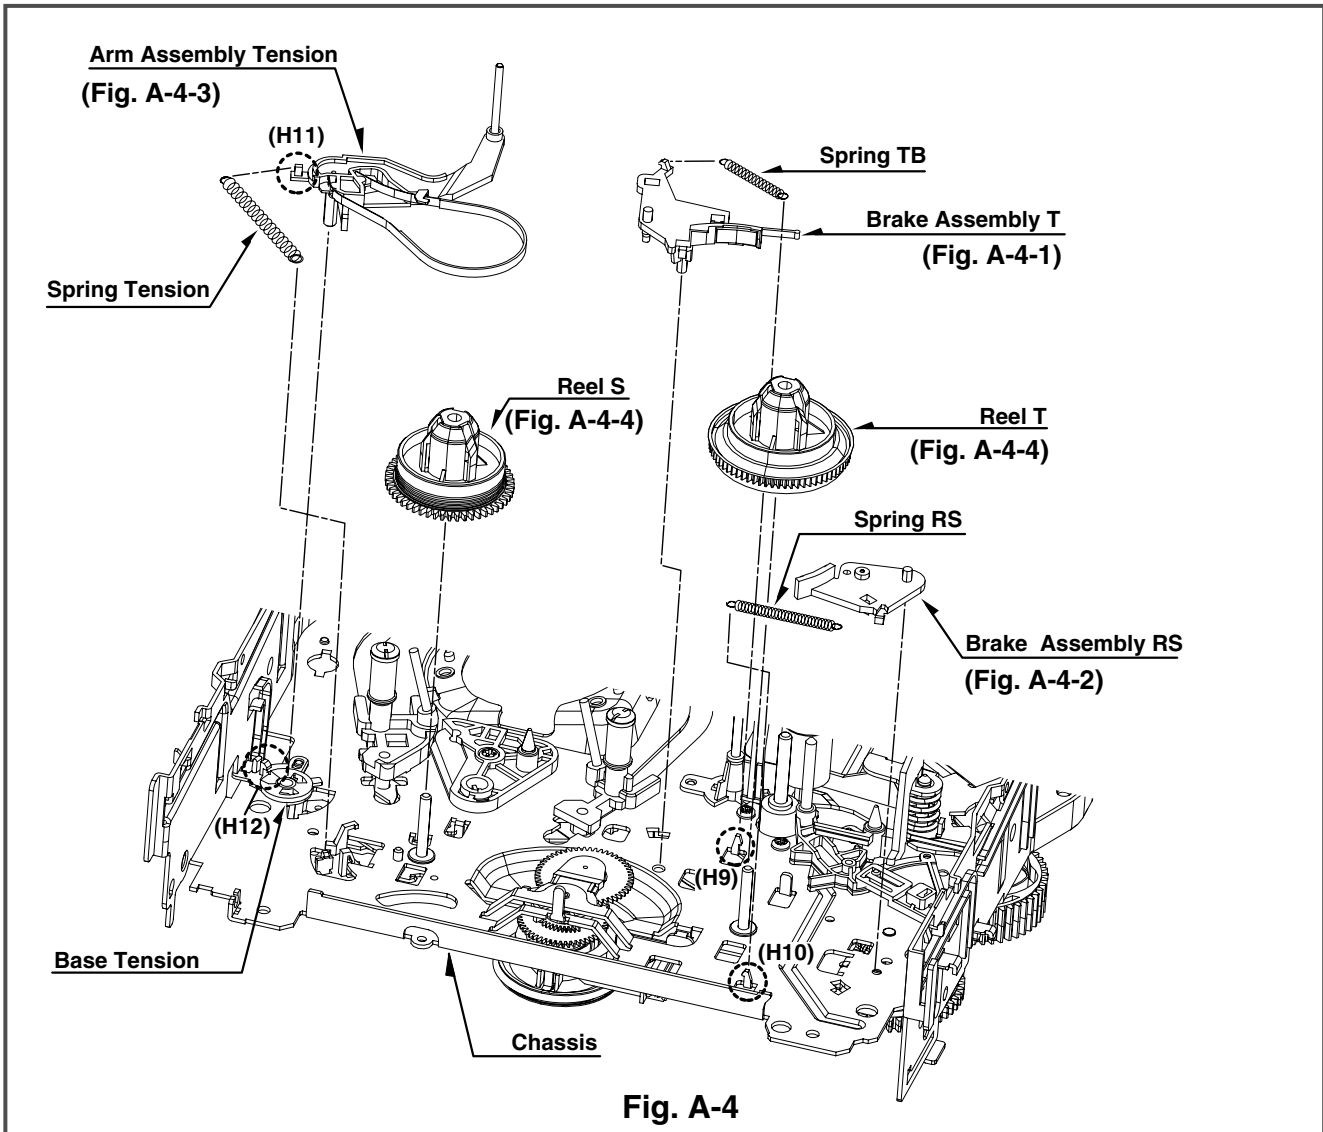


Fig. A-4

12. Brake assembly T (Fig. A-4-1)

- 1) Unhook the Spring TB from the Hook(H9) of the Chassis.
- 2) Lift the Brake assembly T up.

13. Brake assembly RS (Fig. A-4-2)

- 1) Unhook the Spring RS from the Hook(H10) of the Chassis..
- 2) Lift the Brake assembly T up.




14. Arm assembly Tension (Fig. A-4-3)

- 1) Unhook the Spring Tension from the Hook(H11) of the Arm assembly tension.
- 2) Unhook the Hook(H12) of the Base Tension and lift the Arm assembly Tension up.

NOTE


Difference for Springs

(Difference for Springs)

	Spring TB	
	Spring RS	Color (Black)
	Spring Tension	

15. Reel S / Reel T (Fig. A-4-4)

- 1) Difference for Reel S / Reel T

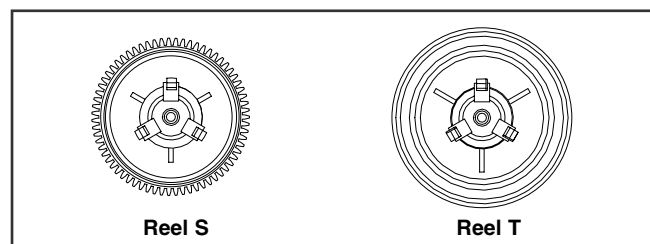

DECK MECHANISM DISASSEMBLY

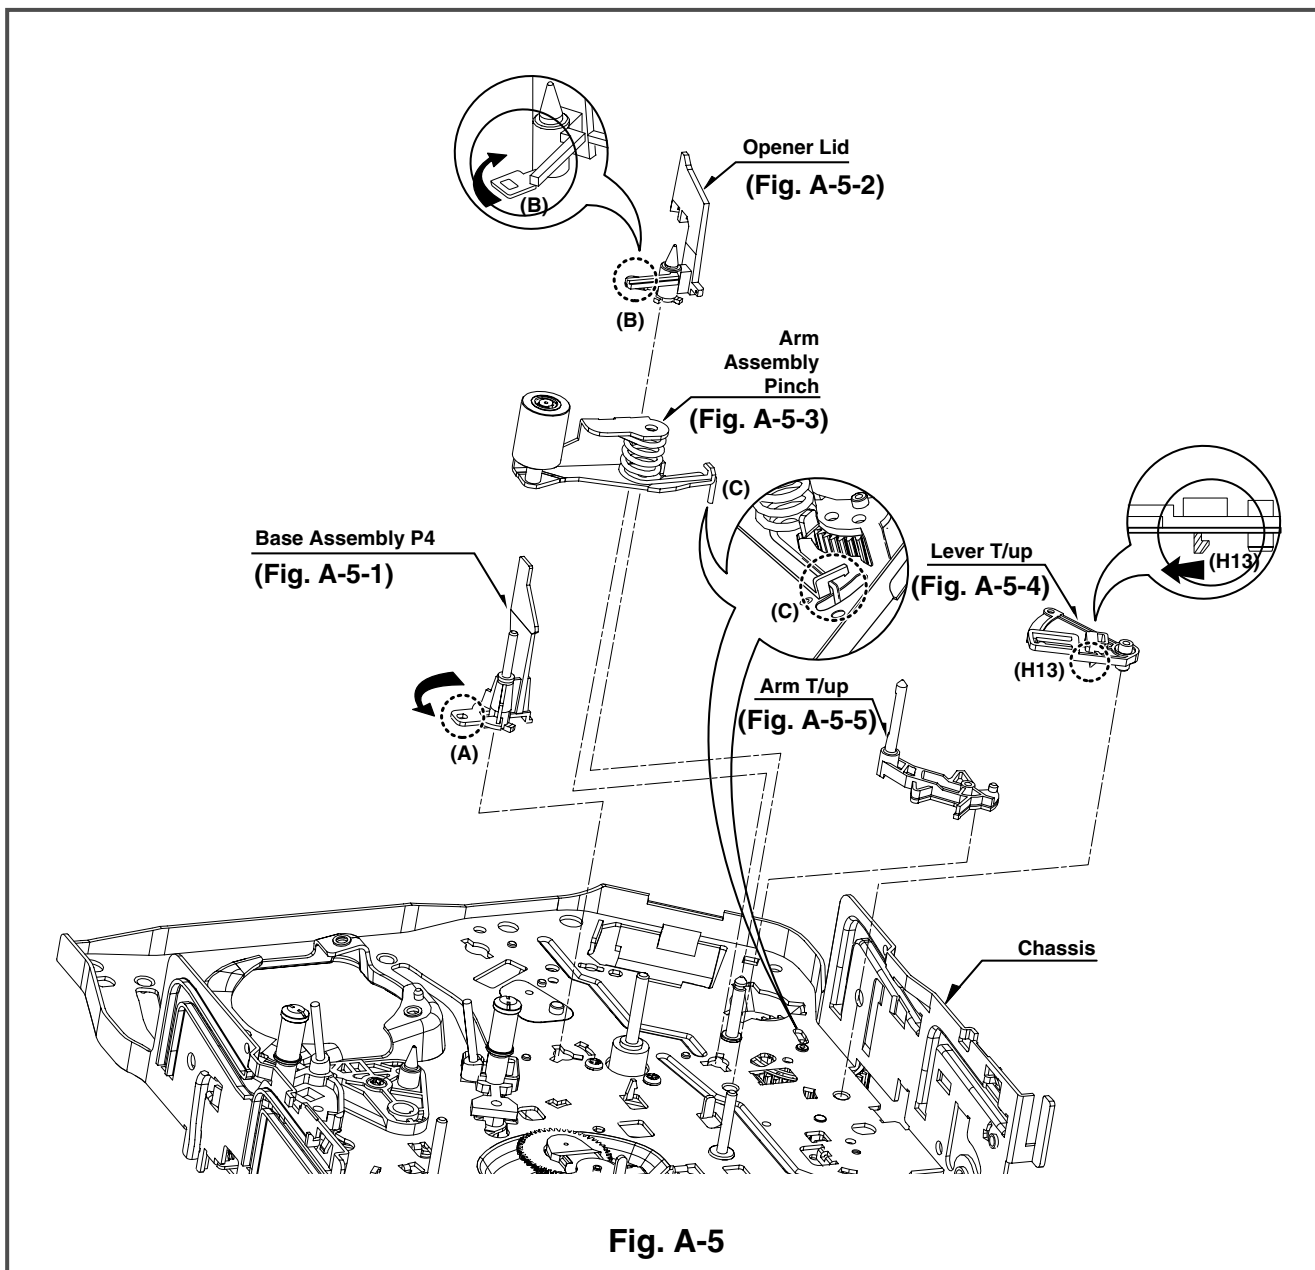


Fig. A-5

16. Base assembly P4 (Fig. A-5-1)

- 1) Breakaway the (A) portion of the Base assembly P4 from the Embossing of the Chassis.
- 2) Turn the Base assembly P4 to counterclockwise direction and lift it up.

17. Opener Lid (Fig. A-5-2)

- 1) Breakaway the (B) portion of the Opener Lid from the Embossing of the Chassis.
- 2) Turn the Opener Lid to clockwise direction and lift it up.

18. Arm assembly Pinch (Fig. A-5-3)

- 1) Lift the Arm assembly Pinch up.

19. Lever T/up (Fig. A-5-4)/ Arm T/up (Fig. A-5-5)

- 1) Unhook the Hook(H13) of the bottom Chassis and lift the Lever T/up up.
- 2) Lift the Arm T/up up.

NOTE

When reassembling, confirm the (C) portion of the Arm assembly Pinch is inserted to the Chassis Hole correctly as Fig.

Place the Mechanism face down, or up side down.

DECK MECHANISM DISASSEMBLY

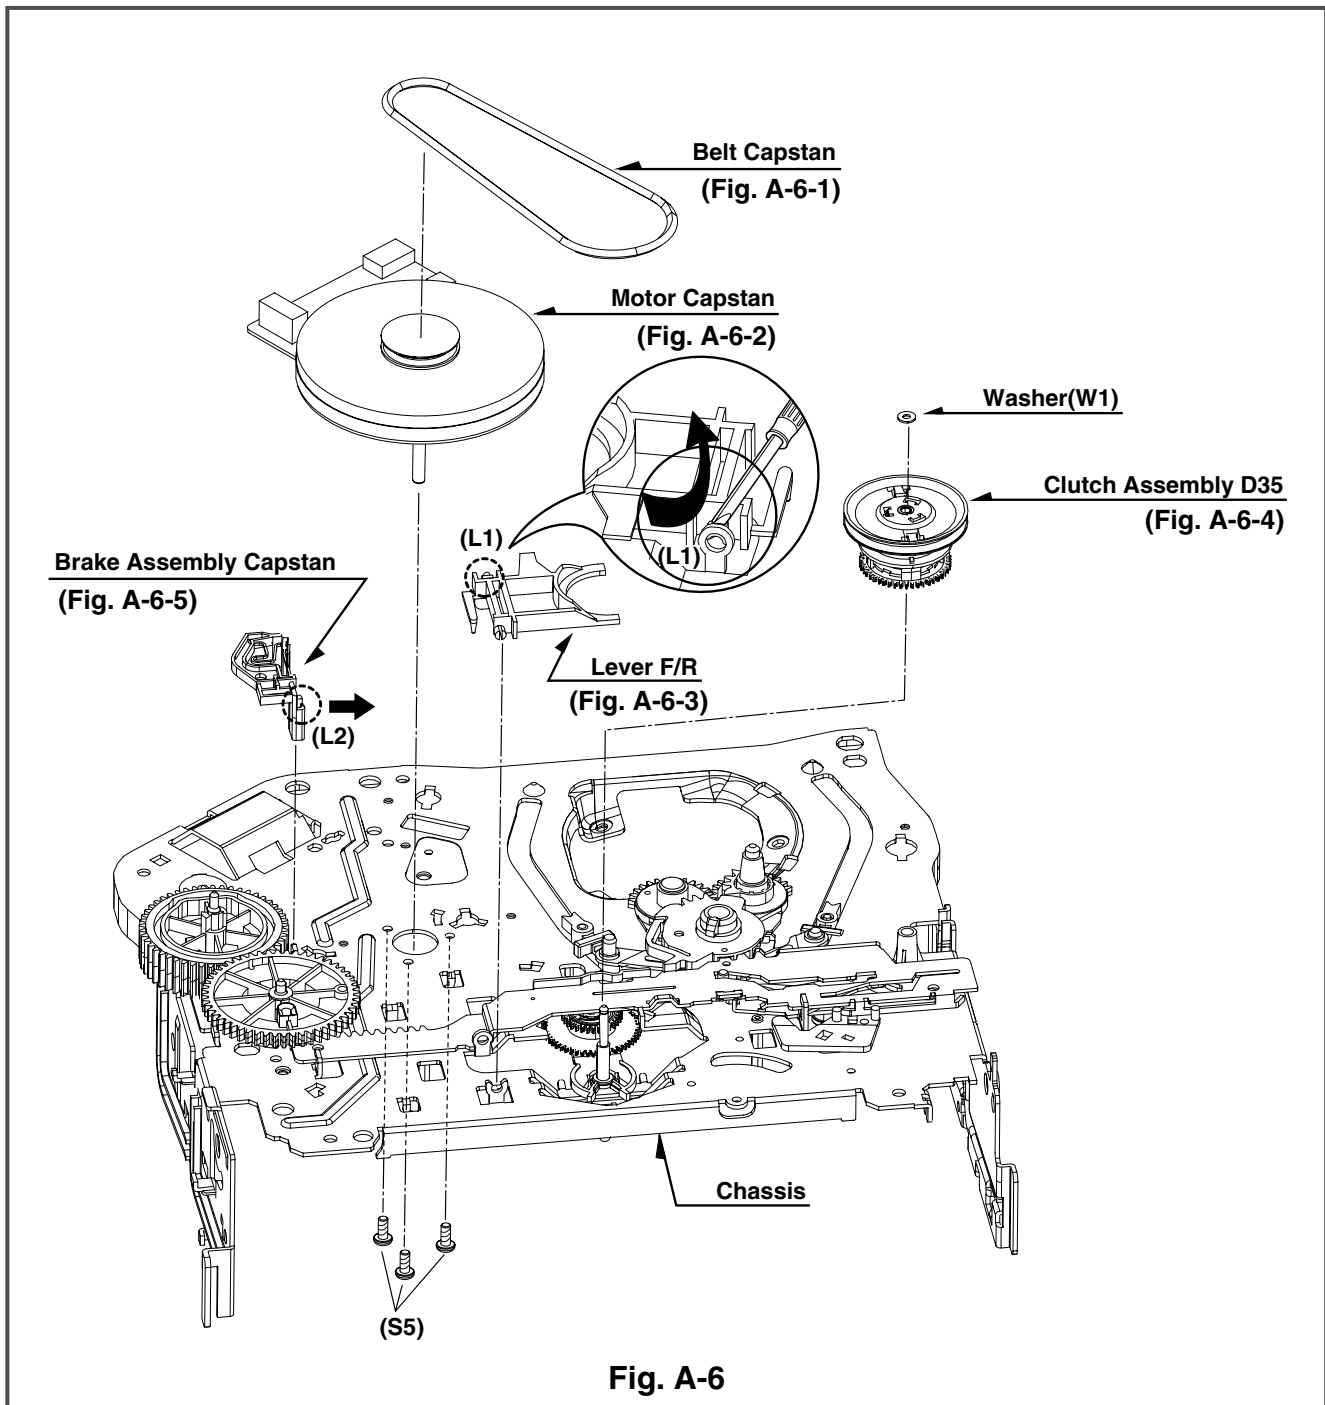


Fig. A-6

20. Belt Capstan (Fig. A-6-1)/ Motor Capstan (Fig. A-6-2)

- 1) Remove the Belt Capstan.
- 2) Remove the three Screws(S5) on bottom Chassis and lift the Motor Capstan up.

21. Lever F/R (Fig. A-6-3)

- 1) Unlock the Locking Tab(L1) as Fig. A-6-3 and lift the Lever F/R up.

22. Clutch assembly D35 (Fig. A-6-4)

- 1) Remove the Washer(W1) and lift the Clutch assembly D35 up.

23. Brake assembly Capstan (Fig. A-6-5)

- 1) Pull the Locking Tab(L2) back in direction of arrow and lift it up.

DECK MECHANISM DISASSEMBLY

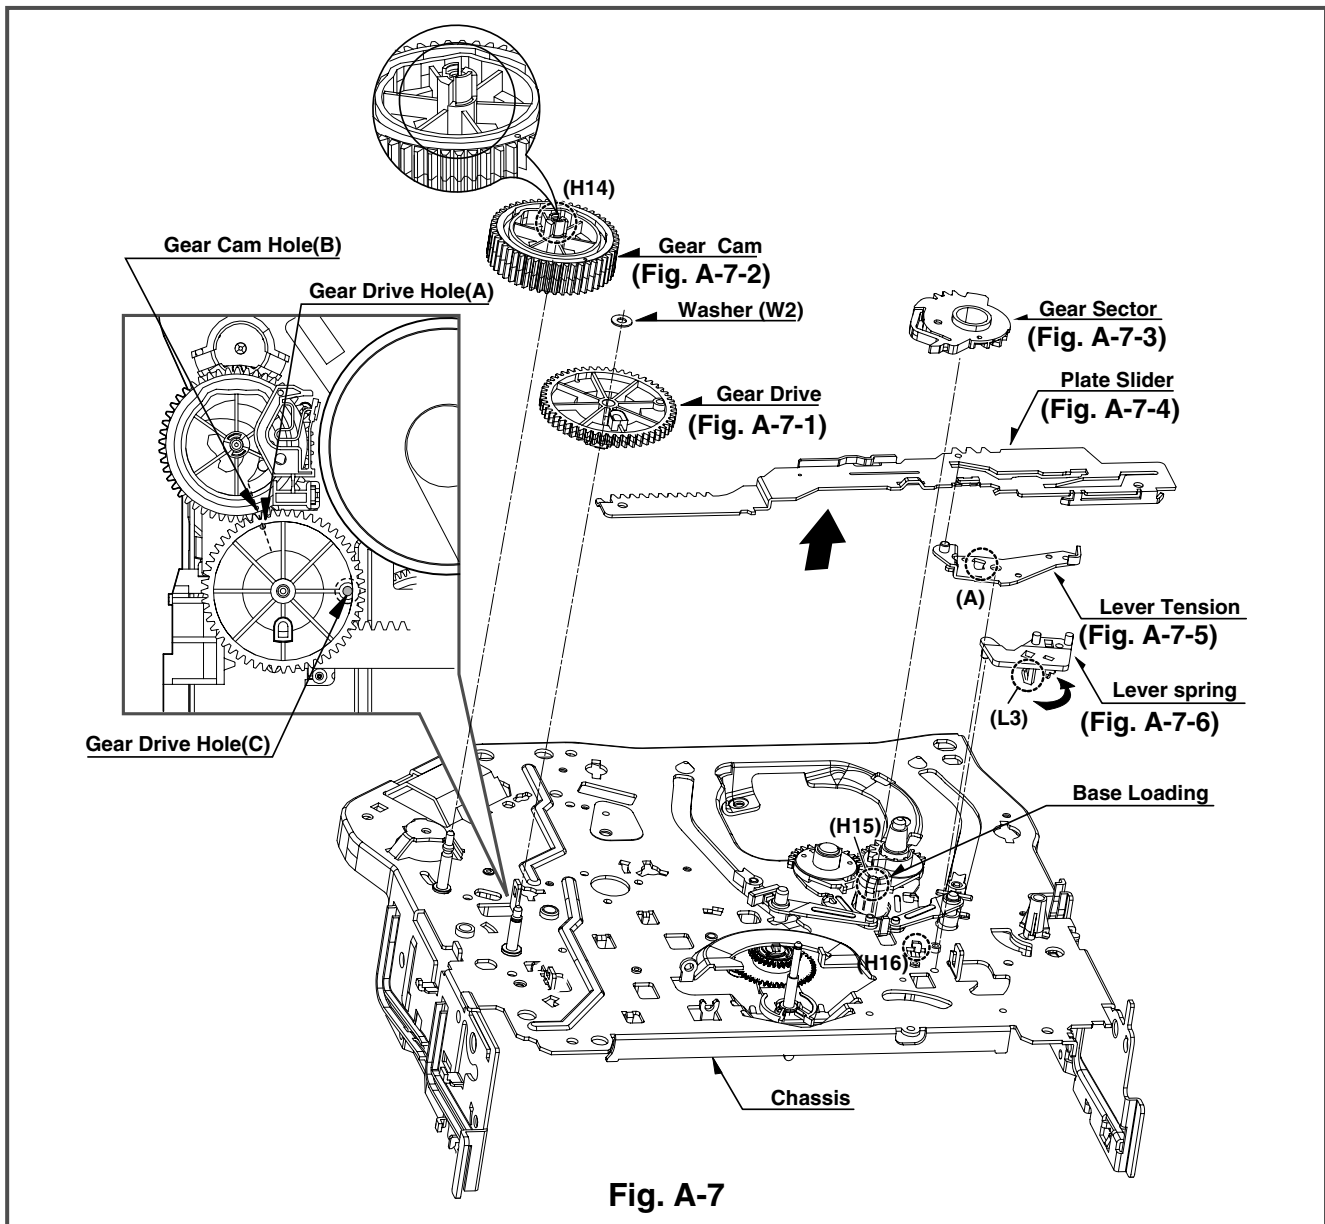


Fig. A-7

24. Gear Drive (Fig. A-7-1)/ Gear Cam (Fig. A-7-2)

- 1) Remove the Washer(W2) and lift the Gear Drive up.
- 2) Unhook the Hook(H14) of the Gear Cam and lift the Gear Cam up.

NOTE

When reassembling, align the Gear Drive Hole(A) and the Gear Cam Hole(B) in a straight line after the Gear Drive Hole(C) is aligned with the Chassis Hole as Fig.

25. Gear Sector (Fig. A-7-3)

- 1) Unhook the Hook(H15) of the Base Loading on bottom Chassis and lift the Gear Sector up.

26. Plate Slider (Fig. A-7-4)

- 1) Just lift the Plate Slider up.

27. Lever Tension (Fig. A-7-5)

- 1) Unhook the (A) portion of the Lever Tension from the Hook(H16) of the Chassis.
- 2) Turn the Lever Tension to counterclockwise direction and lift it up.

28. Lever Spring (Fig. A-7-6)

- 1) Unlock the Locking Tab(L3) of the bottom Chassis and lift the Lever Spring up.

DECK MECHANISM DISASSEMBLY

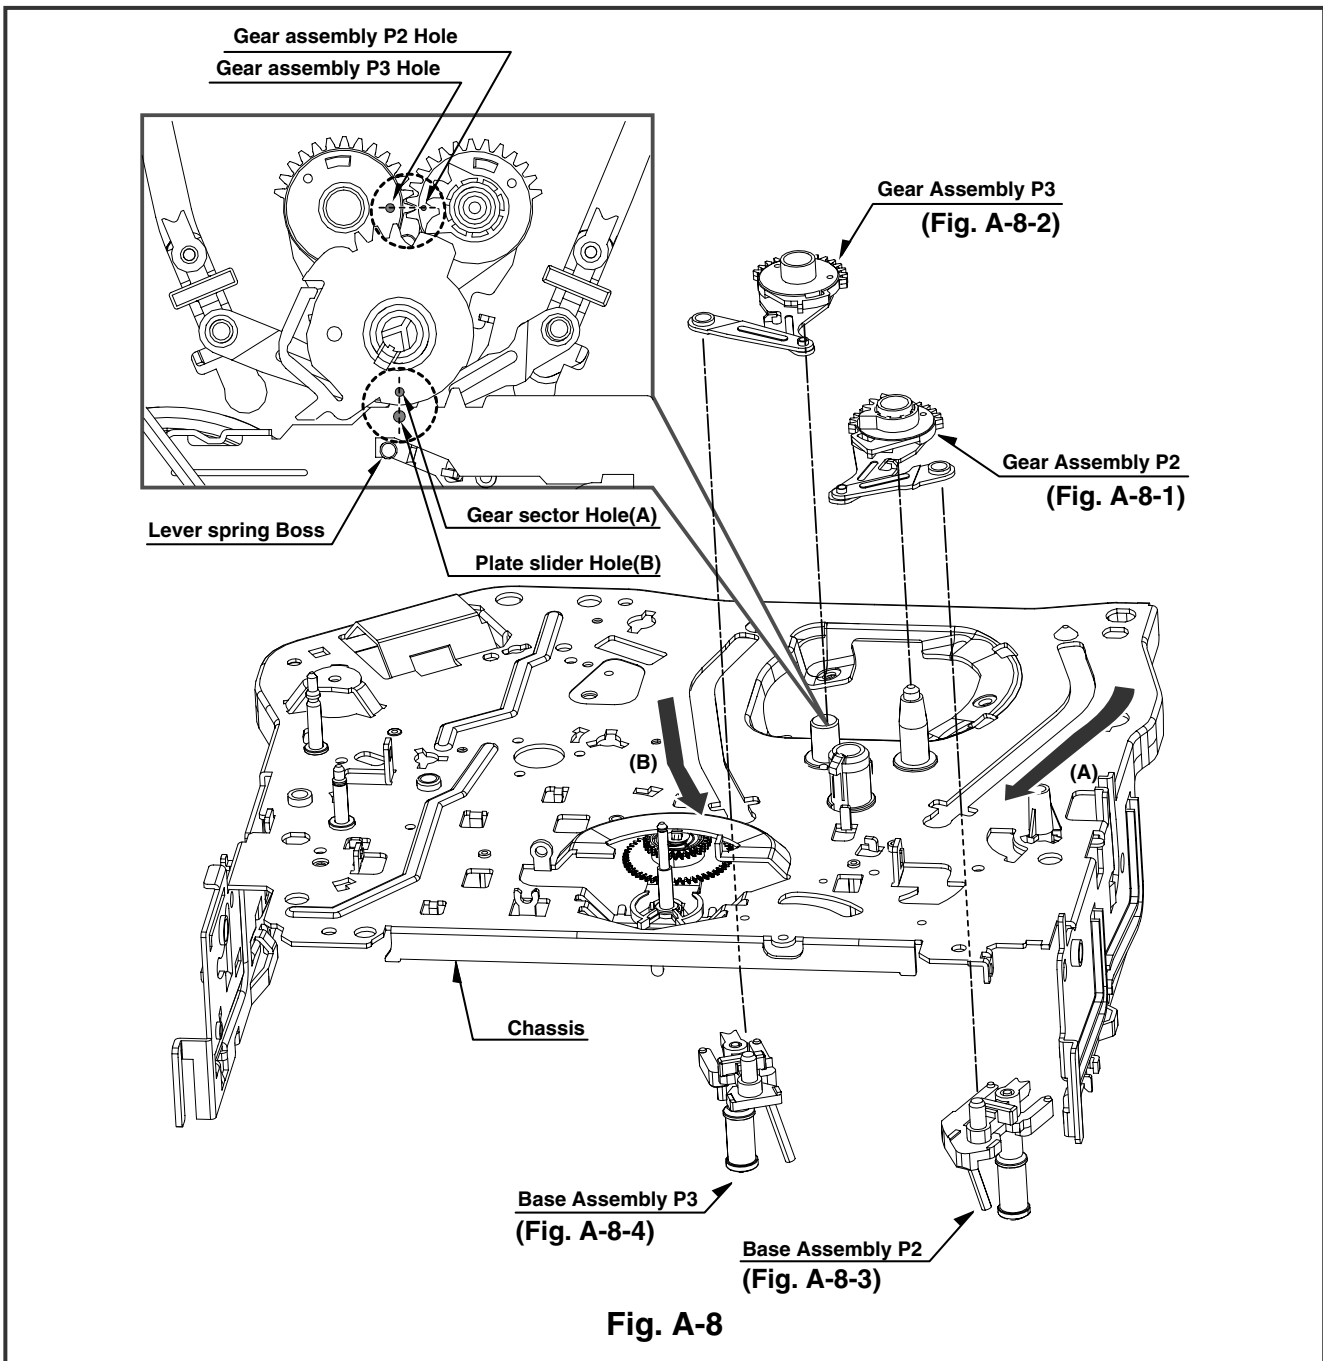


Fig. A-8

29. Gear assembly P2 (Fig. A-8-1)/ Gear assembly P3 (Fig. A-8-2)/

- 1) Just lift the Gear assembly P2 up.
- 2) Just lift the Gear assembly P3 up.

NOTE

When reassembling, align the two Holes of the Gear assembly P2 and P3 in a straight line after confirmation whether the Gear Sector Hole(A) and the Plate Slider Hole(B) are aligned or not as Fig.

30. Base assembly P2 (Fig. A-8-3)/ Base assembly P3 (Fig. A-8-4)

- 1) Move the Base assembly P2 in direction of arrow(A) along the Guided Hole of the Chassis and disassemble it on bottom side.
- 2) Move the Base assembly P3 in direction of arrow(B) along the Guided Hole of the Chassis and disassemble it on bottom side.

Place the Mechanism face down, or return to original position.

DECK MECHANISM DISASSEMBLY

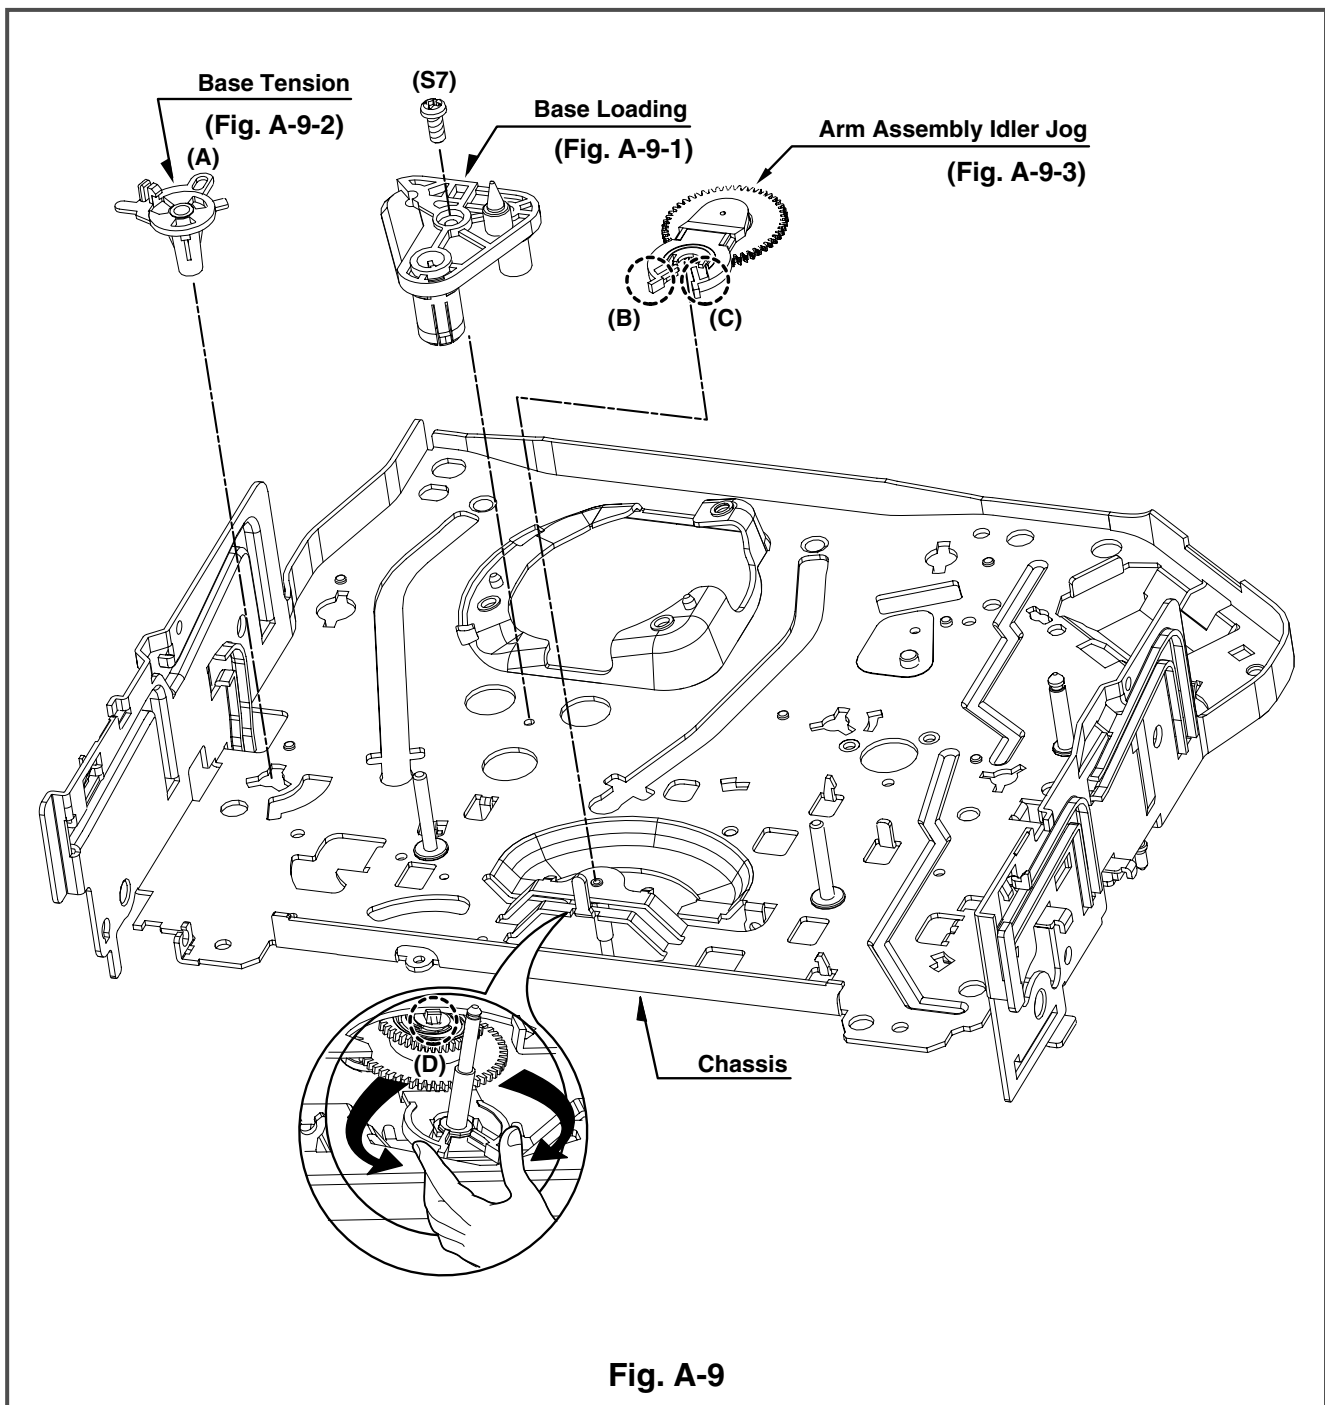


Fig. A-9

31. Base Loading (Fig. A-9-1)

- 1) Remove the Screw(S7).
- 2) Lift the Base Loading up.

32. Base Tension (Fig. A-9-2)

- 1) Breakaway the (A) portion of the Base Tension from the Embossing of the Chassis.
- 2) Turn the Base Tension to counterclockwise direction and lift it up.

33. Arm assembly Idler Jog (Fig. A-9-3)







- 1) Make narrower the two parts, (A) and (B), as Fig. A-9-3.
- 2) Lift the Arm assembly Idler up.

NOTE

When disassembling, be careful not to be caught the (D) part by the Chassis as Fig. A-9.

DECK MECHANISM DISASSEMBLY

• Tools and Fixtures for Service
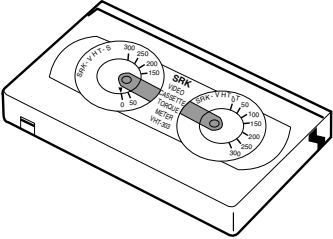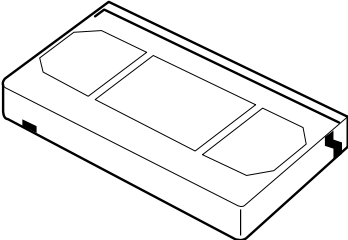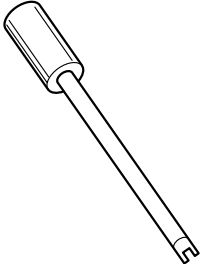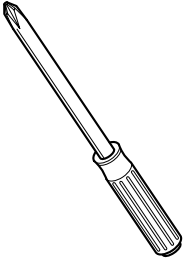
<p>1. Cassette Torque meter SRK-VHT-303(Not SVC part) Parts No: D00-D006</p>  A rectangular cassette torque meter with two circular gauges on top. The left gauge is labeled 'SRK VHT-303' and has a scale from 0 to 250. The right gauge is labeled 'SRK-VHT-303' and has a scale from 0 to 200. The device is shown in a perspective view.	<p>2. Alignment tape Parts No NTSC: DTN-001 PAL:DTN-002</p>  A rectangular alignment tape with a central slot and two smaller slots on either side. It is shown in a perspective view.	<p>3. Torque gauge 600g.Cm ATG Parts No:D00-D002</p>  A cylindrical torque gauge with a hexagonal top and a black base. It is shown in a perspective view.
<p>4. Torque gauge adaptor Parts No:D09-R001</p>  A cylindrical torque gauge adaptor with a hexagonal top and a central hole. It is shown in a perspective view.	<p>5. Post height adjusting driver Parts No:DTL-0005</p>  A long, thin driver with a cylindrical handle and a small hook-like tip. It is shown in a perspective view.	<p>6. + Type driver (ø 5)</p>  A standard Phillips (+) type screwdriver with a long handle and a pointed tip. It is shown in a perspective view.

DECK MECHANISM ADJUSTMENT

1. Mechanism Alignment Position Check

Purpose: To determine if the Mechanism is in the correct position, when a Tape is ejected.

Test Equipment/ Fixture	Test Conditions (Mechanism Condition)	Check Point
• Blank tape	• Eject Mode (with Cassette ejected)	• Mechanism and Mode Switch Position

- 1) Turn the Power S/W on and eject the Cassette by pressing the Eject Button.
- 2) Remove the Top Cover and Plate Assembly Top, visually check if the Gear Cam Hole is aligned with the Chassis Hole as below Fig. C-2.
- 3) IF not, rotate the Shaft of the Loading Motor to either Clockwise or Counterclockwise until the Alignment is as below Fig. C-2.
- 4) Remove the Screw which fixes the Deck Mechanism and Main Frame and confirm if the Gear Cam is aligned with the Gear Drive as below Fig. C-1(A).
- 5) Confirm if the Mode S/W on the Main P.C.Board is aligned as below Fig. C-1(B).
- 6) Remount the Deck Mechanism on the Main P.C.Board and check each operation.

CHECK DIAGRAM

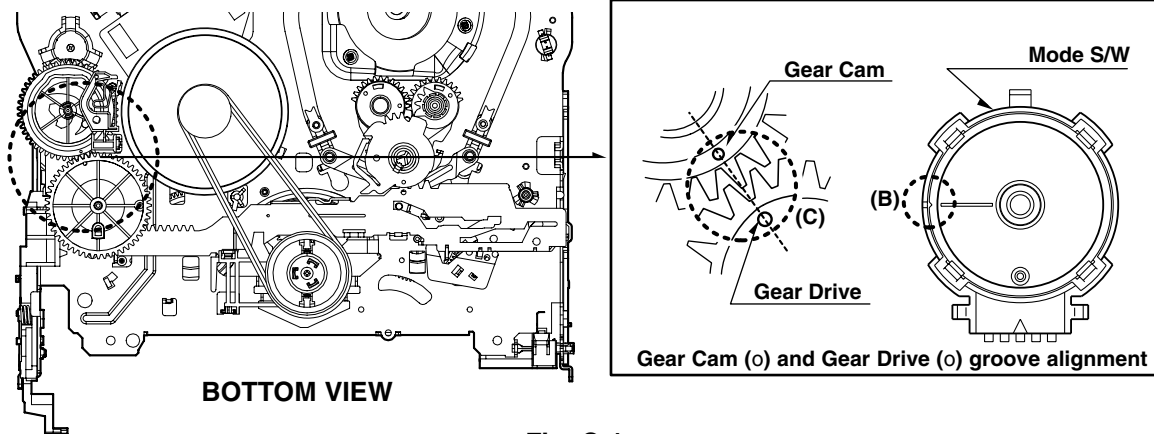


Fig. C-1

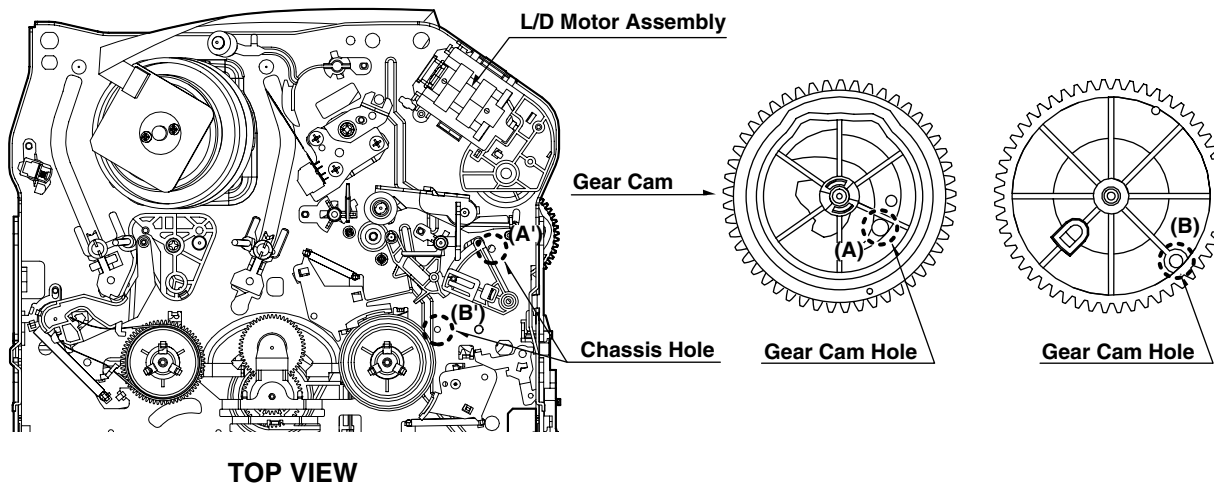


Fig. C-2

DECK MECHANISM ADJUSTMENT

2. Preparation for Adjustment (To set the Deck Mechanism to the Loading state without inserting a Cassette Tape).

- 1) Unplug the Power Cord from the AC Outlet.
- 2) Disassemble the Top Cover and Plate Assembly Top.
- 3) Plug the Power Cord into the AC Outlet.
- 4) Turn the Power S/W on and push the Lever Stopper of the Holder Assembly CST to the back for Loading the

Cassette without Tape.

Cover the Holes of the End Sensors at the both sides of the Bracket Side(L) and Bracket Assembly Door to prevent a light leak.

Then The Deck Mechanism drives to the Stop Mode. In this case, The Deck Mechanism can accept inputs of each mode, however the Rewind and Review Operation can not be performed for more than a few seconds because the Take-up Reel Table is in the Stop State and can not be detected the Reel Pulses.

3. Checking Torque


Purpose: To insure smooth Transport of the Tape during each Mode of Operation.
If the Tape Transport is abnormal, then check the Torque as indicated by the chart below.

Test Equipment/ Fixture	Test Conditions (Mechanism Condition)	Checking Method		
<ul style="list-style-type: none"> • Torque Gauge(600g/cm ATG) • Torque Gauge Adaptor • Cassette Torque Meter SRK-VHT-303 	<ul style="list-style-type: none"> • Play (FF) or Review (REW) Mode 	<ul style="list-style-type: none"> • Perform each Deck Mechanism Mode without inserting a Cassette Tape(Refer to above No.2 Preparation for Adjustment). • Read the Measurement of the Take-up or Supply Reels on the Cassette Torque Meter(Fig. C-3-2). • Attach the Torque Gauge Adaptor to the Torque Gauge and then read the Value of it(Fig. C-3-1). 		
Item	Mode	Test Equipment	Measurement Reel	Measurement Values
Fast Forward Torque	Fast Forward	Cassette Torque Gauge	Take-Up Reel	More than 400g/cm
Rewind Torque	Rewind	Cassette Torque Gauge	Supply Reel	More than 400g/cm
Play Take-Up Torque	Play	Cassette Torque Meter	Take-Up Reel	40~100g/cm
Review Torque	Review	Cassette Torque Meter	Supply Reel	120~210g/cm

NOTE:

The Values are measured by using a Torque Gauge and Torque Gauge Adaptor with the Torque Gauge affixed.


- **Cassette Torque Meter (SRK-VHT-303)**

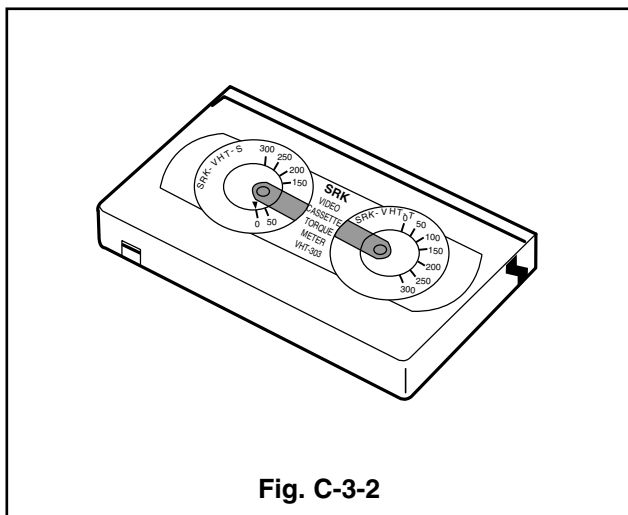

NOTE:

The Torque reading to measure occurs when the Tape abruptly changes direction from Fast Forward of Rewind Mode, when quick bracking is applied to both Reels.

- **Torque Gauge (600g.cm ATG)**

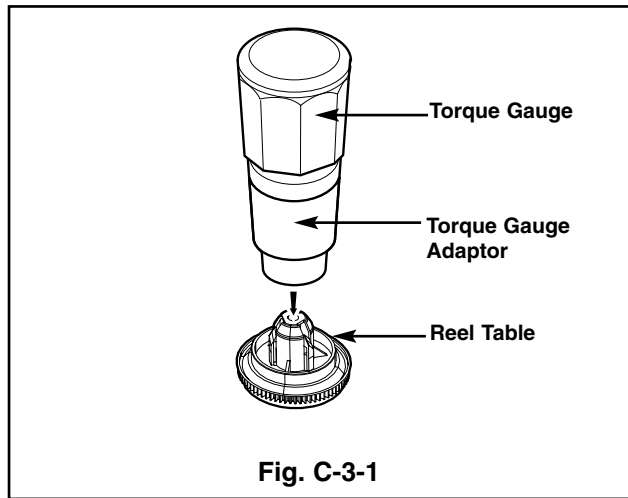


DECK MECHANISM ADJUSTMENT





4. Guide Roller Height Adjustment

Purpose: To regulate the Height of the Tape so that the Bottom of the Tape runs along the Tape Guide Line on the Lower Drum.

4-1. Preliminary Adjustment

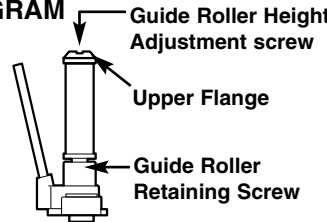Test Equipment/ Fixture	Test Conditions (Mechanism Condition)	Adjustment Point
<ul style="list-style-type: none"> • Post Height Adjusting Driver 	<ul style="list-style-type: none"> • Play or Review Mode 	<ul style="list-style-type: none"> • Guide Roller Height Adjustment screws on the Supply and Take-Up Guide Rollers.
Adjustment Procedure <ol style="list-style-type: none"> 1) Confirm if the Tape runs along the Tape Guide Line of the Lower Drum. 2) If the Tape runs the Bottom of the Guide Line, turn the Guide Roller Height Adjustment Screw to Clockwise direction. 3) If it runs the Top, turn to Counterclockwise direction. 4) Adjust the Height of the Guide Roller to be guided to the Guide Line of the Lower Drum from the Starting and Ending Point of the Drum. 		ADJUSTMENT DIAGRAM  <p>Fig. C-4-1</p>

4-2. Precise Adjustment

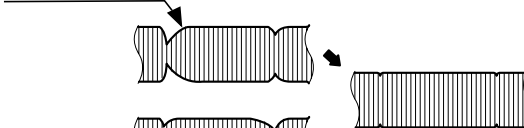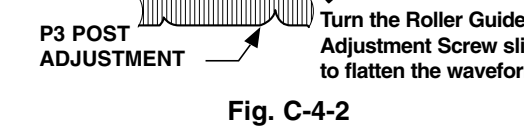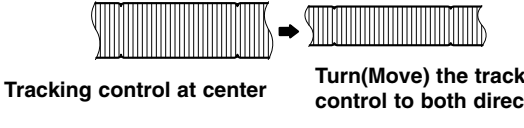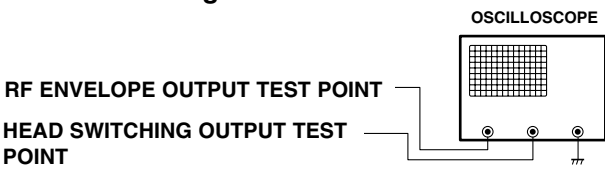Test Equipment/Fixture	Test Equipment Connection Points	Test Conditions VCR(VCP) State	Adjustment Point
<ul style="list-style-type: none"> • Oscilloscope • Alignment Tape • Post Height Adjusting Driver 	<ul style="list-style-type: none"> • CH-1:PB RF Envelope • CH-2:NTSC: SW 30Hz PAL: SW 25Hz • Head Switching Output Point • RF Envelope Output Point 	<ul style="list-style-type: none"> • Play an Alignment Tape 	<ul style="list-style-type: none"> • Guide Roller Height Adjustment Screws
Adjustment Procedure <ol style="list-style-type: none"> 1) Play an Alignment Tape after connecting the Probe of the Oscilloscope to the RF Envelope Output Test Point and Head Switching Output Test Point. 2) Tracking Control(in PB Mode) : Center Position(When this Adjustment is performed after the Drum Assembly has been replaced, set the Tracking Control so that the RF Output is Maximum). 3) Height Adjustment Screw : Flatten the RF Waveform. (Fig. C-4-2) 4) Turn(Move) the Tracking Control(in PB Mode) Clockwise and Counterclockwise.(Fig. C-4-3) 5) Check that any Drop of RF Output is uniform at the Start and End of the Waveform. <p>NOTE</p> <p>If the adjustment is excessive or insufficient the tape will jam or fold.</p>		Waveform Diagrams <p>P2 POST ADJUSTMENT</p>  <p>P3 POST ADJUSTMENT</p>  <p>Fig. C-4-2</p> <p>Tracking control at center</p>  <p>Fig. C-4-3</p> <p>Connection Diagram</p> 	

DECK MECHANISM ADJUSTMENT

5. Audio/Control (A/C) Head Adjustment

Purpose: To insure that the Tape passes accurately over the Audio and Control Tracks in exact Alignment in both the Record and Playback Modes.

5-1. Preliminary Adjustment (Height and Tilt Adjustment)

Perform the Preliminary Adjustment, when there is no Audio Output Signal with the Alignment Tape.




Test Equipment/ Fixture	Test Conditions (Mechanism Condition)	Adjustment Point
<ul style="list-style-type: none"> • Blank Tape • Screw Driver(+) Type 5mm 	<ul style="list-style-type: none"> • Play the blank tape 	<ul style="list-style-type: none"> • Tilt Adjustment Screw(C) • Height Adjustment Screw(B) • Azimuth Adjustment Screw(A)

Adjustment Procedure/Diagrams

- Initially adjust the Base Assembly A/C Head as shown Fig. C-5-1 by using the Height Adjustment Screw(B).
- Play a Blank Tape and observe if the Tape passes accurately over the A/C Head without Tape Curling or Folding.
- If Folding or Curling is occurred then adjust the Tilt Adjustment Screw(C) while the Tape is running to resemble Fig. C-5-3.
- Reconfirm the Tape Path after Playback about 4-5 seconds.

NOTE

Ideal A/C head height occurs, when the tape runs between 0.2~0.25mm above the bottom edge of the A/C head core.

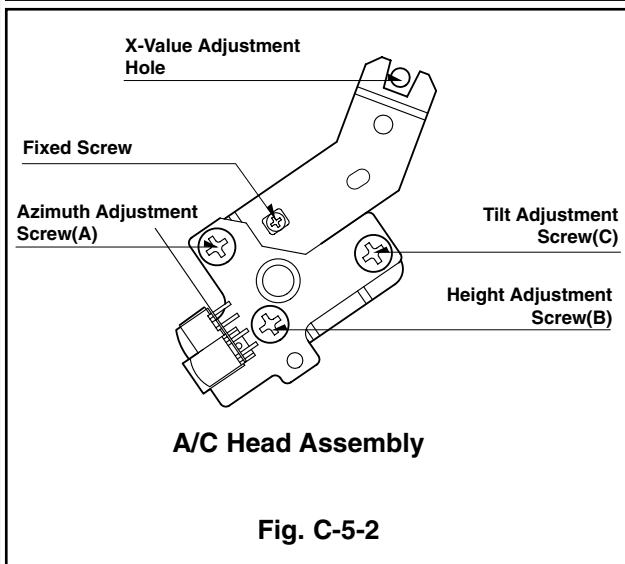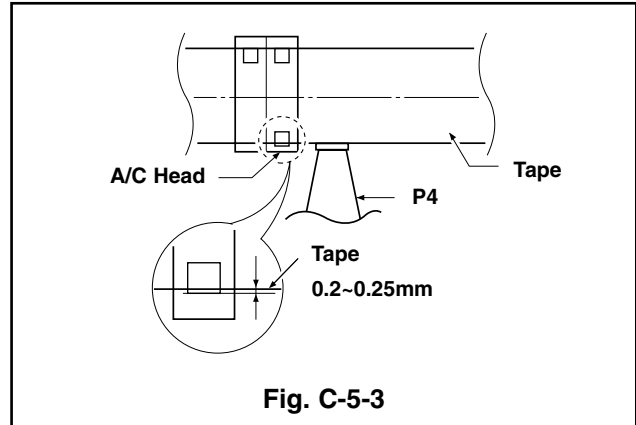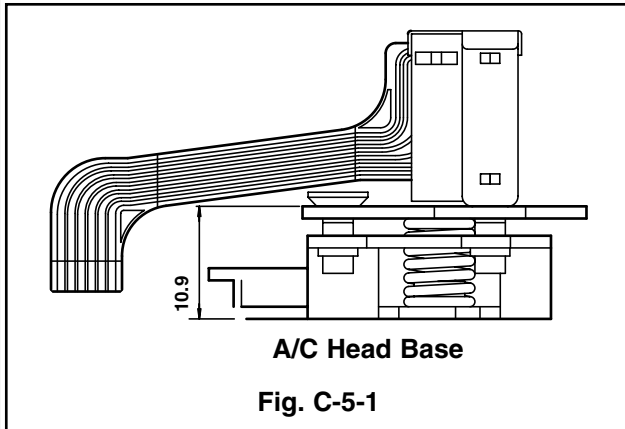

DECK MECHANISM ADJUSTMENT

5-2. Confirmation of Tape path between the Take-up Guide and Pinch Roller (using a Mirror or the naked eye).

- 1) After completing Step 5-1.(Preliminary Adjustment), check that the Tape passes around the Take-up Guide and Pinch Roller without Folding or Curling at the Top or Bottom.
 - (1) If Folding or Curling is observed at the Bottom of the Take-up Guide then slowly turn the Tilt Adjustment Screw(C) in the Clockwise direction.
 - (2) If Folding or Curling is observed at the Top of it then


slowly turn the Tilt Adjustment Screw(C) in the Counterclockwise direction.

NOTE:

Check the RF Envelope after adjusting the A/C Head, if the RF Waveform differs from Fig. C-5-4, performs Precise Adjustment to flat the RF Waveform.

5-3. Precise Adjustment (Azimuth adjustment)

Test Equipment/ Fixture	Connection Point	Test Conditions (Mechanism Condition)	Adjustment Point
<ul style="list-style-type: none"> • Oscilloscope • Alignment Tape(SP) • Screw Driver(+) Type 5mm 	<ul style="list-style-type: none"> • Audio output jack 	<ul style="list-style-type: none"> • Play an Alignment Tape 1KHz, 7KHz Sections 	<ul style="list-style-type: none"> • Azimuth Adjustment Screw(A) • Height Adjustment Screw(B)
Adjustment Procedure <ol style="list-style-type: none"> 1) Connect the Probe of the Oscilloscope to Audio Output Jack. 2) Alternately adjust the Azimuth Adjustment Screw(A) and the Tilt Adjustment Screw(C) for Maximum Output of the 1Khz and 7Khz segments, while maintaining the flattest Envelope differential between the two Frequencies. 			


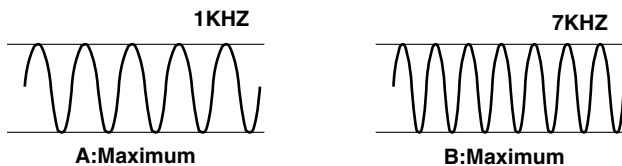


6. X-Value Adjustment

Purpose: To obtain compatibility with other VCR(VCP) Models.			
Test Equipment/ Fixture	Connection Point	Test Conditions (Mechanism Condition)	Adjustment Point
<ul style="list-style-type: none"> • Oscilloscope • Alignment tape(SP only) • Screw Driver(+) Type 5mm 	<ul style="list-style-type: none"> • CH-1: PB RF Envelope • CH-2: NTSC: SW 30Hz PAL: SW 25Hz • Head Switching Output Test Point • RF Envelope Output Test Point 	<ul style="list-style-type: none"> • Play an Alignment Tape 	
Adjustment Procedure <ol style="list-style-type: none"> 1) Release the Automatic Tracking to run long enough for Tracking to complete it's Cycle. 2) Loosen the Fixed Mounting Screw and move the Base Assembly A/C Head in the direction as shown in the Diagram to find the center of the peak that allows for the maximum Waveform Envelope. This method should allow the 31um Head to be centrally located over the 58um Tape Track. 3) Tighten the Base Assembly A/C Head mounting Screw. 		Adjustment Diagram	
		Connection Diagram	

DECK MECHANISM ADJUSTMENT

7. Adjustment after Replacing Drum Assembly (Video Heads)

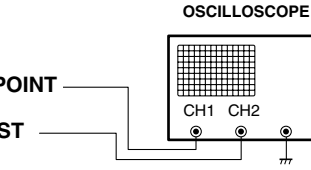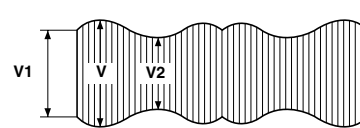Purpose: To correct for shift in the Roller Guide and X value after replacing the Drum.			
Test Equipment/ Fixture	Connection Point	Test Conditions (Mechanism Condition)	Adjustment Points
<ul style="list-style-type: none"> Oscilloscope Alignment tapes Blank Tape Post Height Adjusting Driver Screw Driver(+) Type 5mm 	<ul style="list-style-type: none"> CH-1: PB RF Envelope CH-2: NTSC: SW 30Hz PAL: SW 25Hz Head Switching Output Test Point RF Envelope Output Test Point 	<ul style="list-style-type: none"> Play the blank tape Play an alignment tape 	<ul style="list-style-type: none"> Guide Roller Precise Adjustment Switching Point Tracking Preset X-Value
Checking/Adjustment Procedure Play a blank tape and check for tape curling or creasing around the roller guide. If there is a problem then follow the procedure 4. "Guide Roller Height" and 5. "Audio Control(A/C) Head Adjustment".		Connection Diagram  Waveform $V1/V \text{ MAX} \leq 0.7$ $V2/V \text{ MAX} \leq 0.8$ RF ENVELOPE OUTPUT 	
Fig. C-7			

8. Check the Tape Travel after Reassembling Deck Assembly.

8-1. Checking Audio and RF Locking Time during playback and after CUE or REV (FF/REW)

Test Equipment/ Fixture	Specification	Connection Points	Test Conditions (Mechanism Condition)
<ul style="list-style-type: none"> Oscilloscope Alignment tapes (with 6H 3kHz Color Bar Signal) Stop Watch 	<ul style="list-style-type: none"> RF Locking Time: Less than 5 sec. Audio Locking Time: Less than 10sec 	<ul style="list-style-type: none"> CH-1: PB RF Envelope CH-2: Audio Output RF Envelope Output Point Audio Output Jack 	<ul style="list-style-type: none"> Play an alignment tape (with 6H 3kHz Color Bar Signal)
Checking Procedure Play an alignment tape then change the operating mode to CUE or REV and confirm if the unit meets the above listed specifications.		NOTES: 1) CUE is fast forward mode (FF) 2) REV is the rewind mode (REW) 3) Referenced to the Play mode	

8-2. Checking for tape curling or jamming

Test Equipment/ Fixture	Specification	Test Conditions (Mechanism Condition)
<ul style="list-style-type: none"> E-240 Tape E-180 Tape 	<ul style="list-style-type: none"> Be sure there is no tape jamming or curling at the beginning, middle or end of the tape. 	<ul style="list-style-type: none"> Run the CUE, REV play mode at the beginning and the end of the tape.
Checking Procedure 1) Confirm that the tape runs smoothly around the roller guides, drum and A/C head assemblies while abruptly changing operating modes from Play to CUE or REV. This is to be checked at the beginning, middle and end sections of the cassette. 2) Confirm that the tape passes over the A/C head assembly as indicated by proper audio reproduction and proper tape counter performance.		

MAINTENANCE/INSPECTION PROCEDURE

1 Check before starting repairs

The following faults can be remedied by cleaning and oiling. Check the needed lubrication and the conditions of cleanliness in the unit.

Check with the customer to find out how often the unit is used, and then determine that the unit is ready for inspection and maintenance. Check the following parts.

Phenomenon	Inspection	Replacement
Color beats	Dirt on full-erase head	o
Poor S/N, no color	Dirt on video head	o
Vertical or Horizontal jitter	Dirt on video head Dirt on tape transport system	o
Low volume, Sound distorted	Dirt on Audio/control head	o
Tape does not run. Tape is slack	Dirt on pinch roller	o
In Review and Unloading (off mode), the Tape is rolled up loosely.	Clutch Assembly D33K Torque reduced	o
	Cleaning Drum and transport system	Fig. C-9-3

NOTE

If locations marked with **o** do not operate normally after cleaning, check for wear and replace. See the EXPLODED VIEWS at the end of this manual as well as the above illustrations See the Greasing (Page 4-22) for the sections to be lubricated and greased.

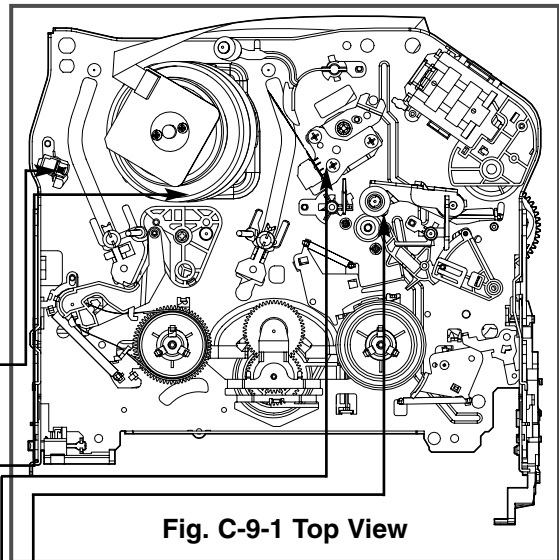


Fig. C-9-1 Top View

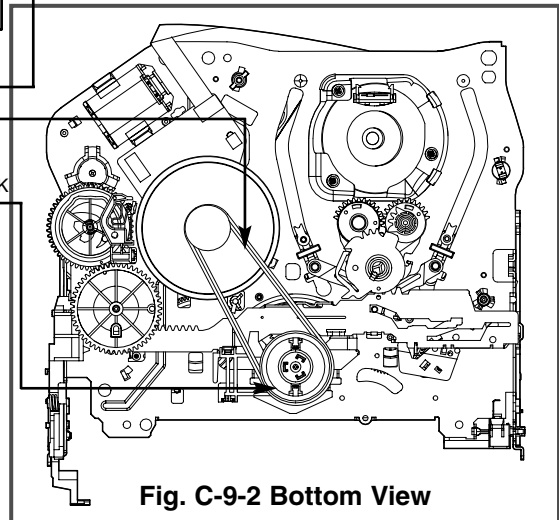


Fig. C-9-2 Bottom View

* No. (1)~(13) Indicates the Tape Path to be traveled from Supply Reel to Take-up Reel.

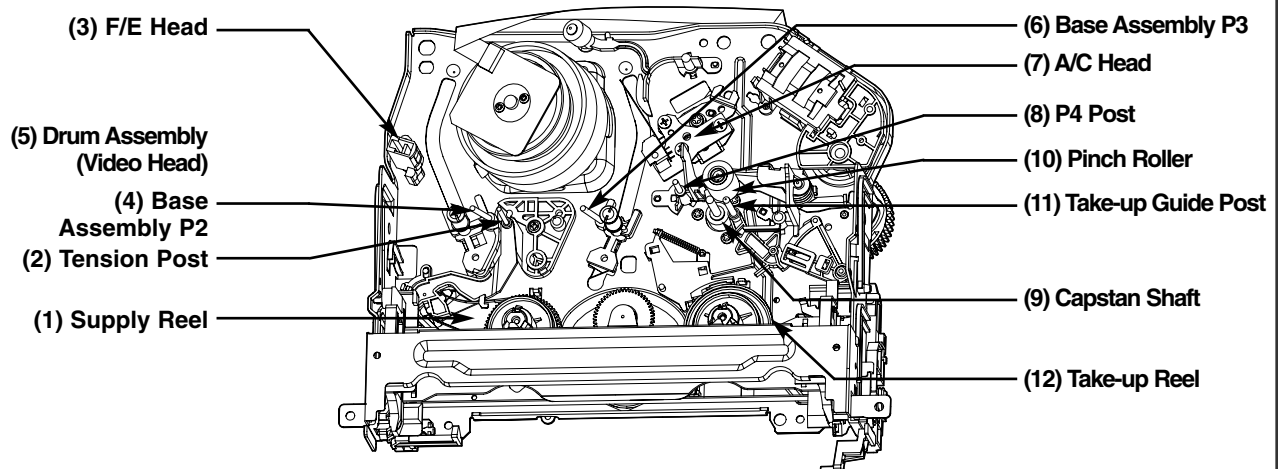


Fig. C-9-3 Tape Transport System

MAINTENANCE/INSPECTION PROCEDURE

2. Required Maintenance

The recording density of a VCR(VCP) is much higher than that of an audio tape recorder. VCR(VCP) components must be very precise, at tolerances of 1/1000mm, to ensure compatibility with other VCRs. If any of these components are worn or dirty, the symptoms will be the same as if the part is defective. To ensure a good picture, periodic inspection and maintenance, including replacement of worn out parts and lubrication, is necessary.

3. Scheduled Maintenance

Schedules for maintenance and inspection are not fixed because they vary greatly according to the way in which the customer uses the VCR(VCP), and the environment in which the VCR(VCP) is used.

But, in general home use, a good picture will be maintained if inspection and maintenance is made every 1,000 hours. The table below shows the relation between time used and inspection period.

Table 1

When inspection is necessary / Average hours used per day	About 1 year	About 18 months	About 3 years
One hour	[Bar chart showing inspection every 1 year]		
Two hours	[Bar chart showing inspection every 18 months]		
Three hours	[Bar chart showing inspection every 3 years]		

4. Supplies Required for Inspection and Maintenance

- (1) Grease : Kanto G-311G (Blue) or equivalent
- (2) Isopropyl Alcohol or equivalent
- (3) Cleaning Patches
- (4) Grease : Kanto G-381(Yellow)

5) Maintenance Procedure

5-1) Cleaning

- (1) Cleaning video head

First use a cleaning tape. If the dirt on the head is too stubborn to remove by tape, use the cleaning patch. Coat the cleaning patch with Isopropyl Alcohol. Touch the cleaning patch to the head tip and gently turn the head(rotating cylinder) right and left.

(Do not move the cleaning patch vertically. Make sure that only the buckskin on the cleaning patch comes into contact with the head. Otherwise, the head may be damaged.)

Thoroughly dry the head. Then run the test tape. If Isopropyl Alcohol remains on the video head, the tape may be damaged when it comes into contact with the head surface.

- (2) Clean the tape transport system and drive system, etc, by wiping with a cleaning patch wetted with Isopropyl Alcohol.

NOTES:

- ① It is the tape transport system which comes into contact with the running tape. The drive system consists of those parts which moves the tape.
- ② Make sure that during cleaning you do not touch the tape transport system with the tip of a screw driver and no that force is that would cause deforming or damage applied to the system.

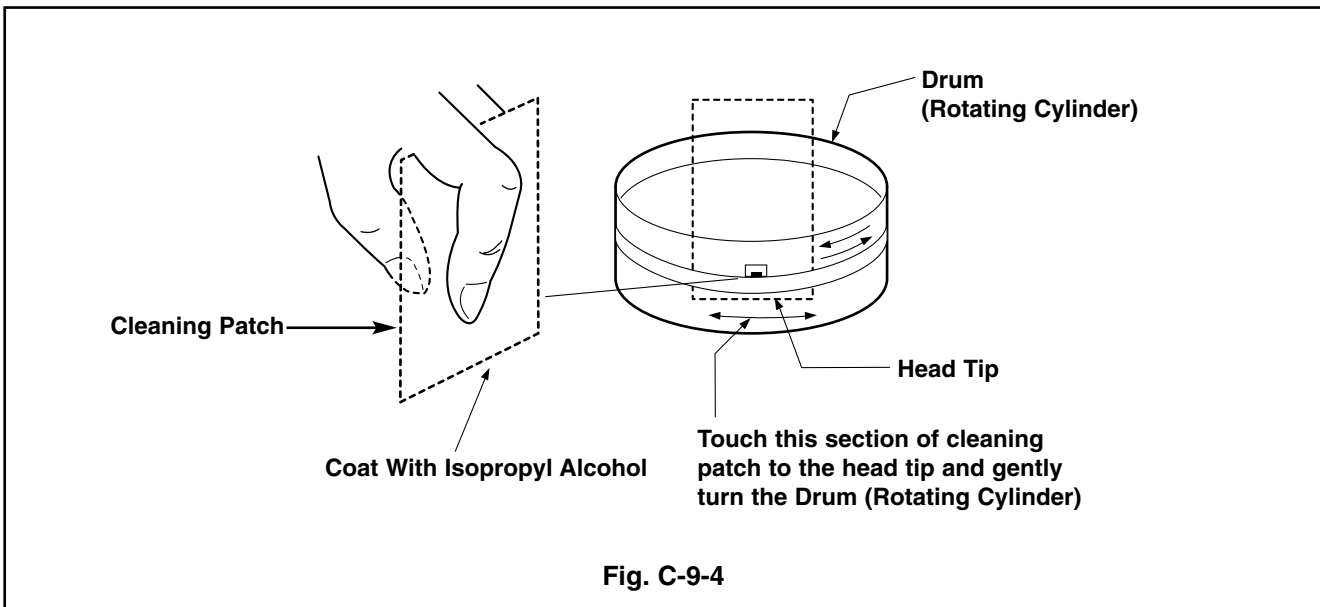


Fig. C-9-4

MAINTENANCE/INSPECTION PROCEDURE


5-2) Greasing

(1) Greasing guidelines

Apply grease, with a cleaning patch. Do not use excess grease. It may come into contact with the tape transport or drive system. Wipe any excess and clean with cleaning patch wetted in Isopropyl Alcohol.


NOTE: Greasing Points

- | | |
|-----------------------------------|---|
| 1) Loading Path Inside & Top side | 6) Shaft |
| 2) Base Tension Boss inside Hole | 7) Arm Assembly F/L of Buming Inside Hole |
| 3) Arm Assembly F/L "U" Groove | 8) Reel S, T Shaft (G381:Yellow) |
| 4) Arm Take-up Rubbing Section | 9) Brake T Groove |
| 5) L/D Motor Gear Wheel Part | |

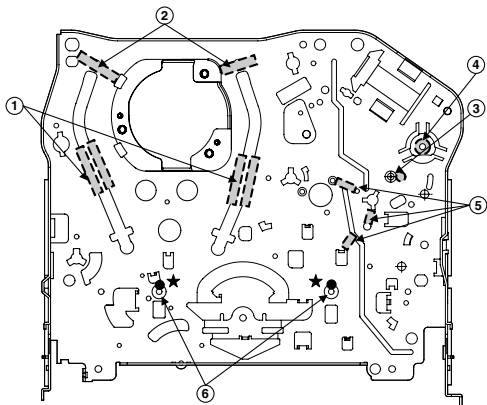

Chassis (Top)

Gear Part

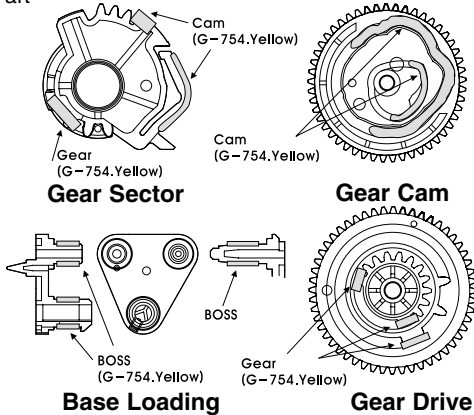


Bracket Side (L)

Bracket Assembly Door


(2) Periodic greasing

Grease specified locations every 5,000 hours.

- | | |
|-----------------------------------|------------------------------|
| 1) Loading Path Inside & Top side | 5) Lever Tension Groove |
| 2) Shaft | 6) Clutch Assembly D33 Shaft |
| 3) Gear Rack F/L Moving Section | 7) Brake "S" Rubbing Section |
| 4) Shaft | |

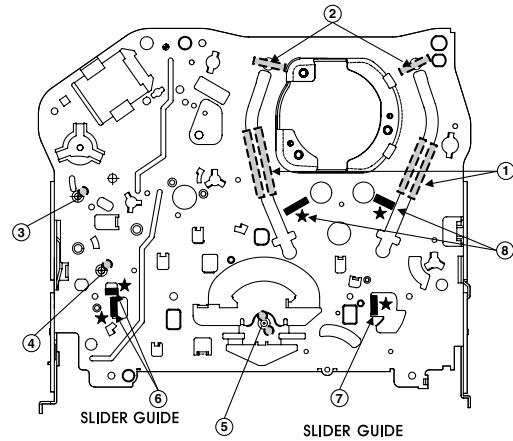


Chassis (Bottom)

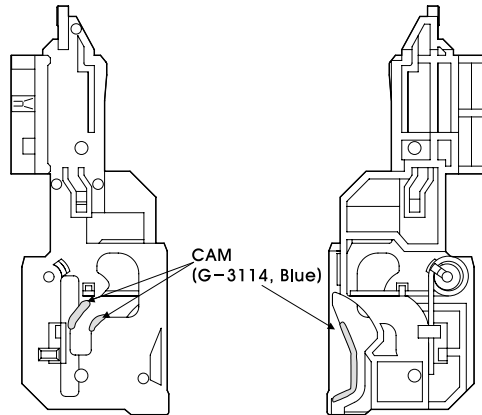


Guide Rack F/L


Gear Rack F/L

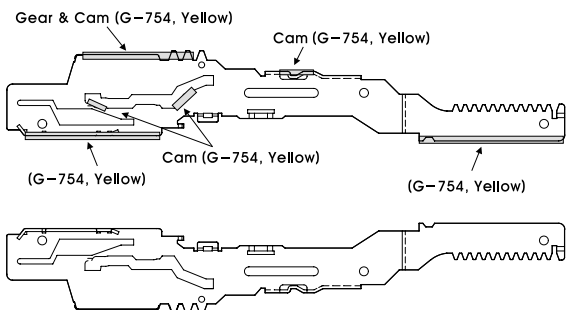

GEAR , F/R

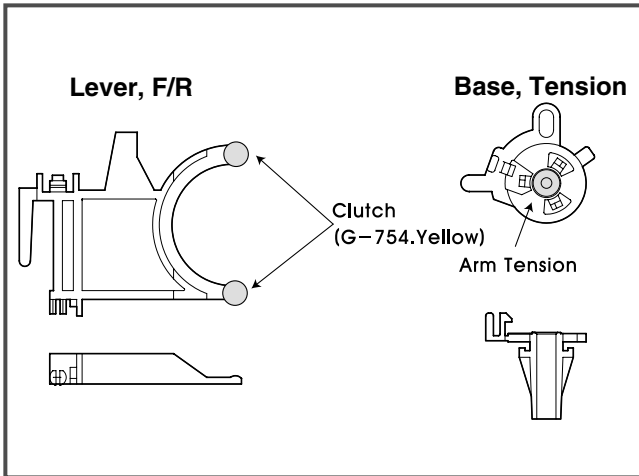


GEAR AY, P2 & P3

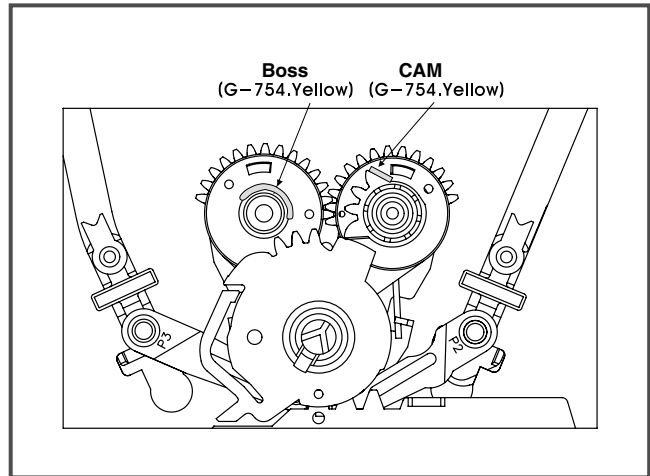


MECHANISM TROUBLESHOOTING GUIDE

1. Deck Mechanism

A.

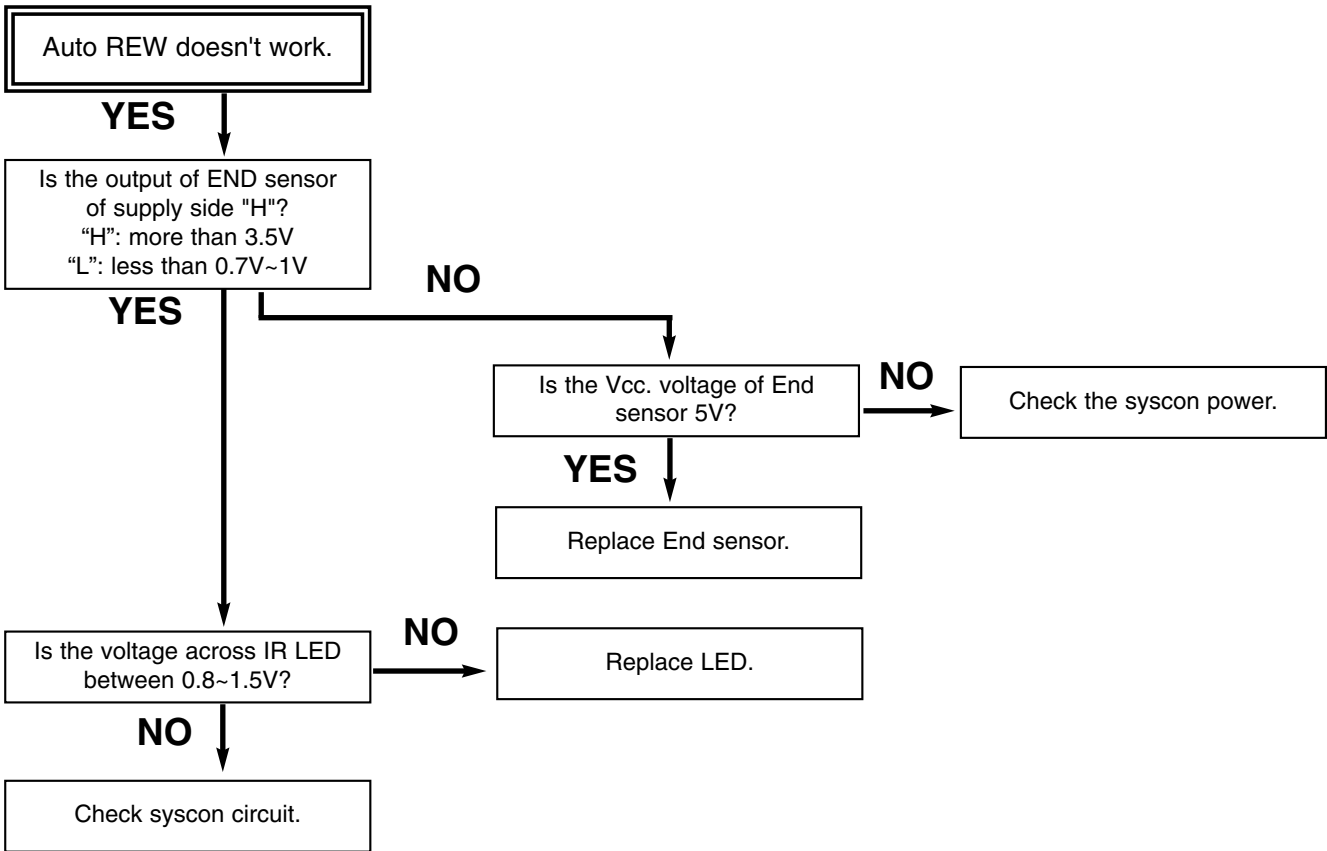


B.

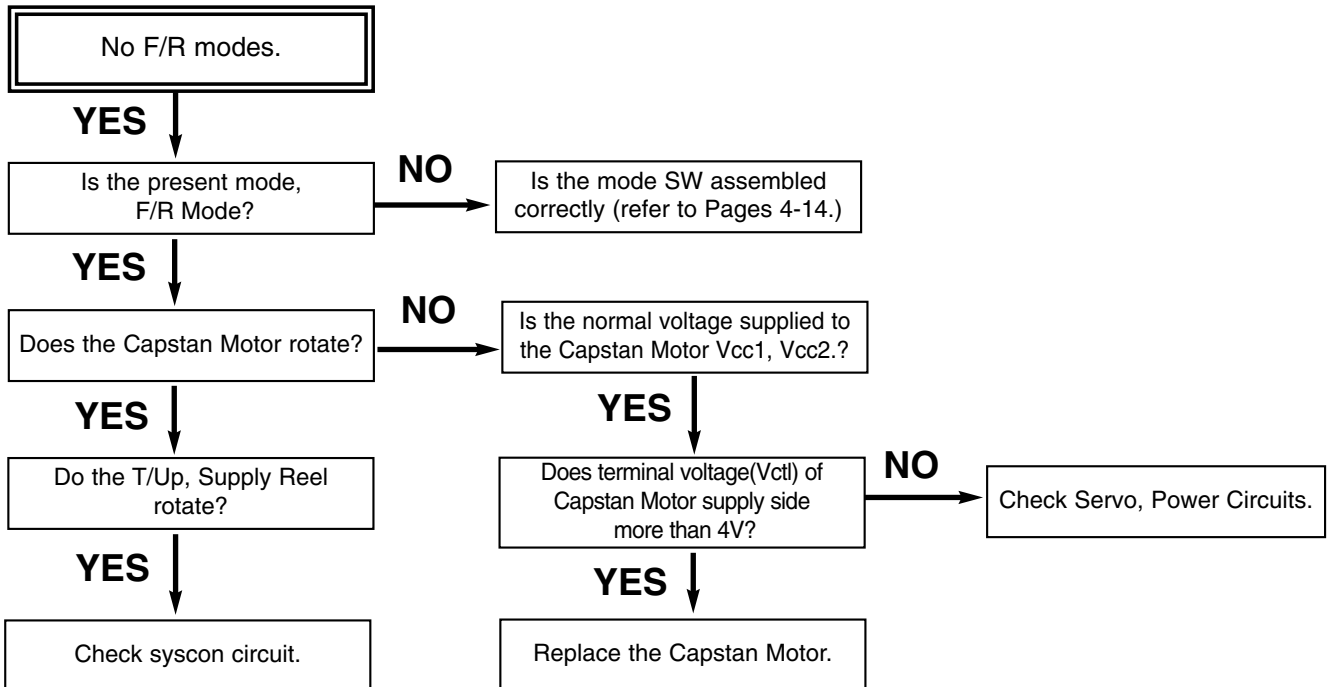


MECHANISM TROUBLESHOOTING GUIDE

C.

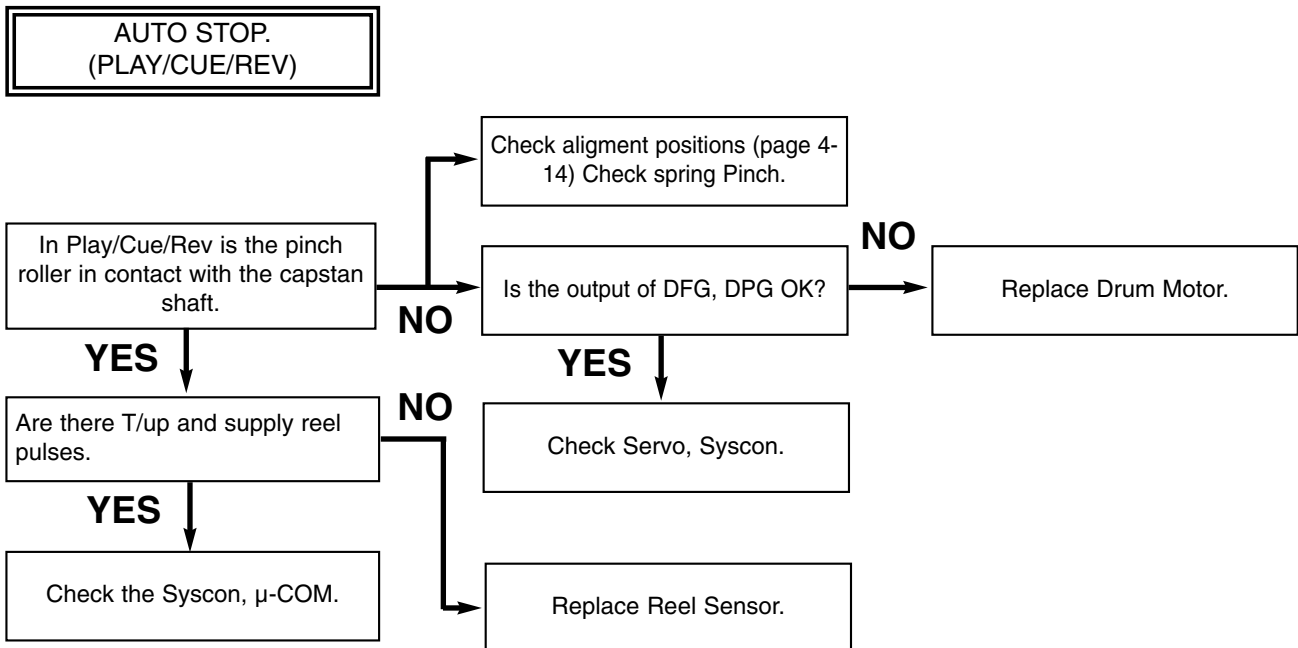


D.

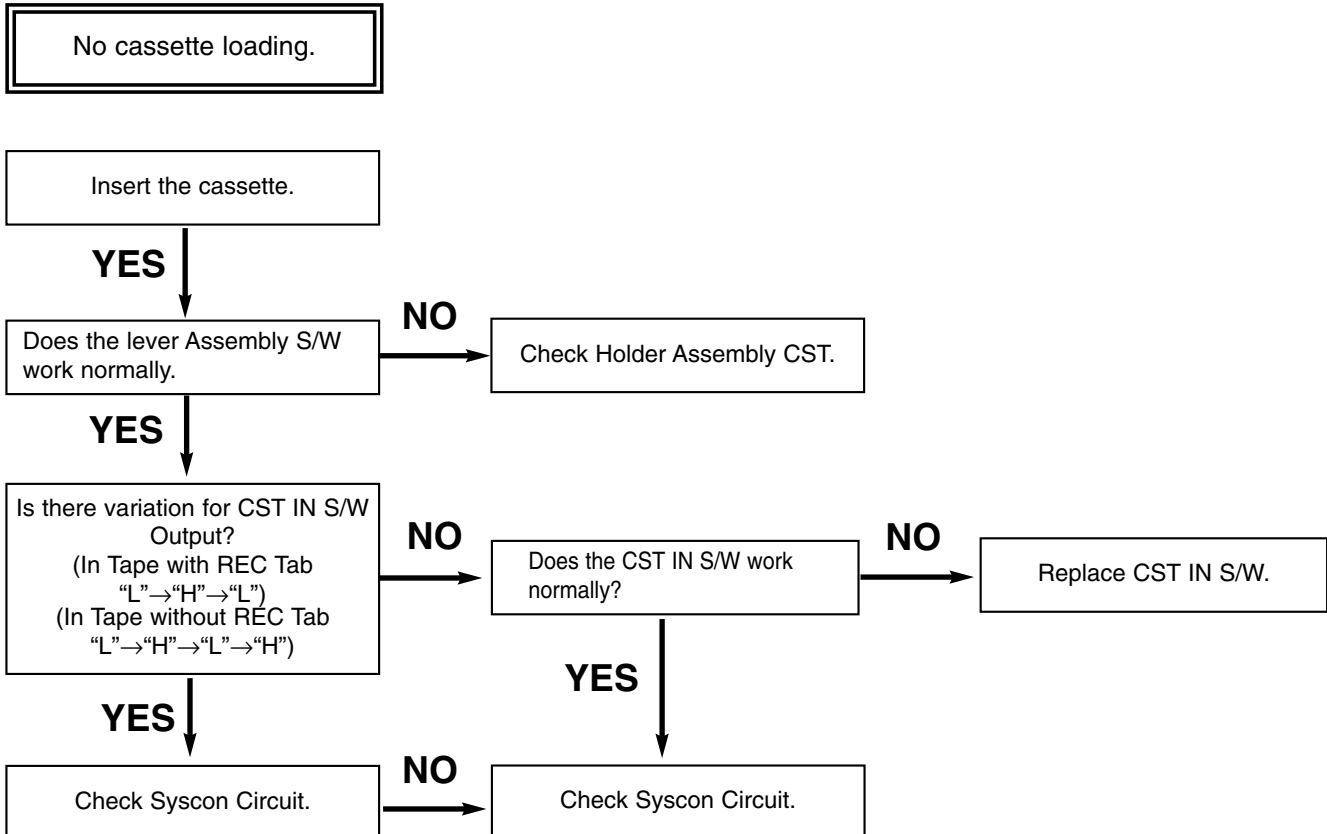

MECHANISM TROUBLESHOOTING GUIDE


E.

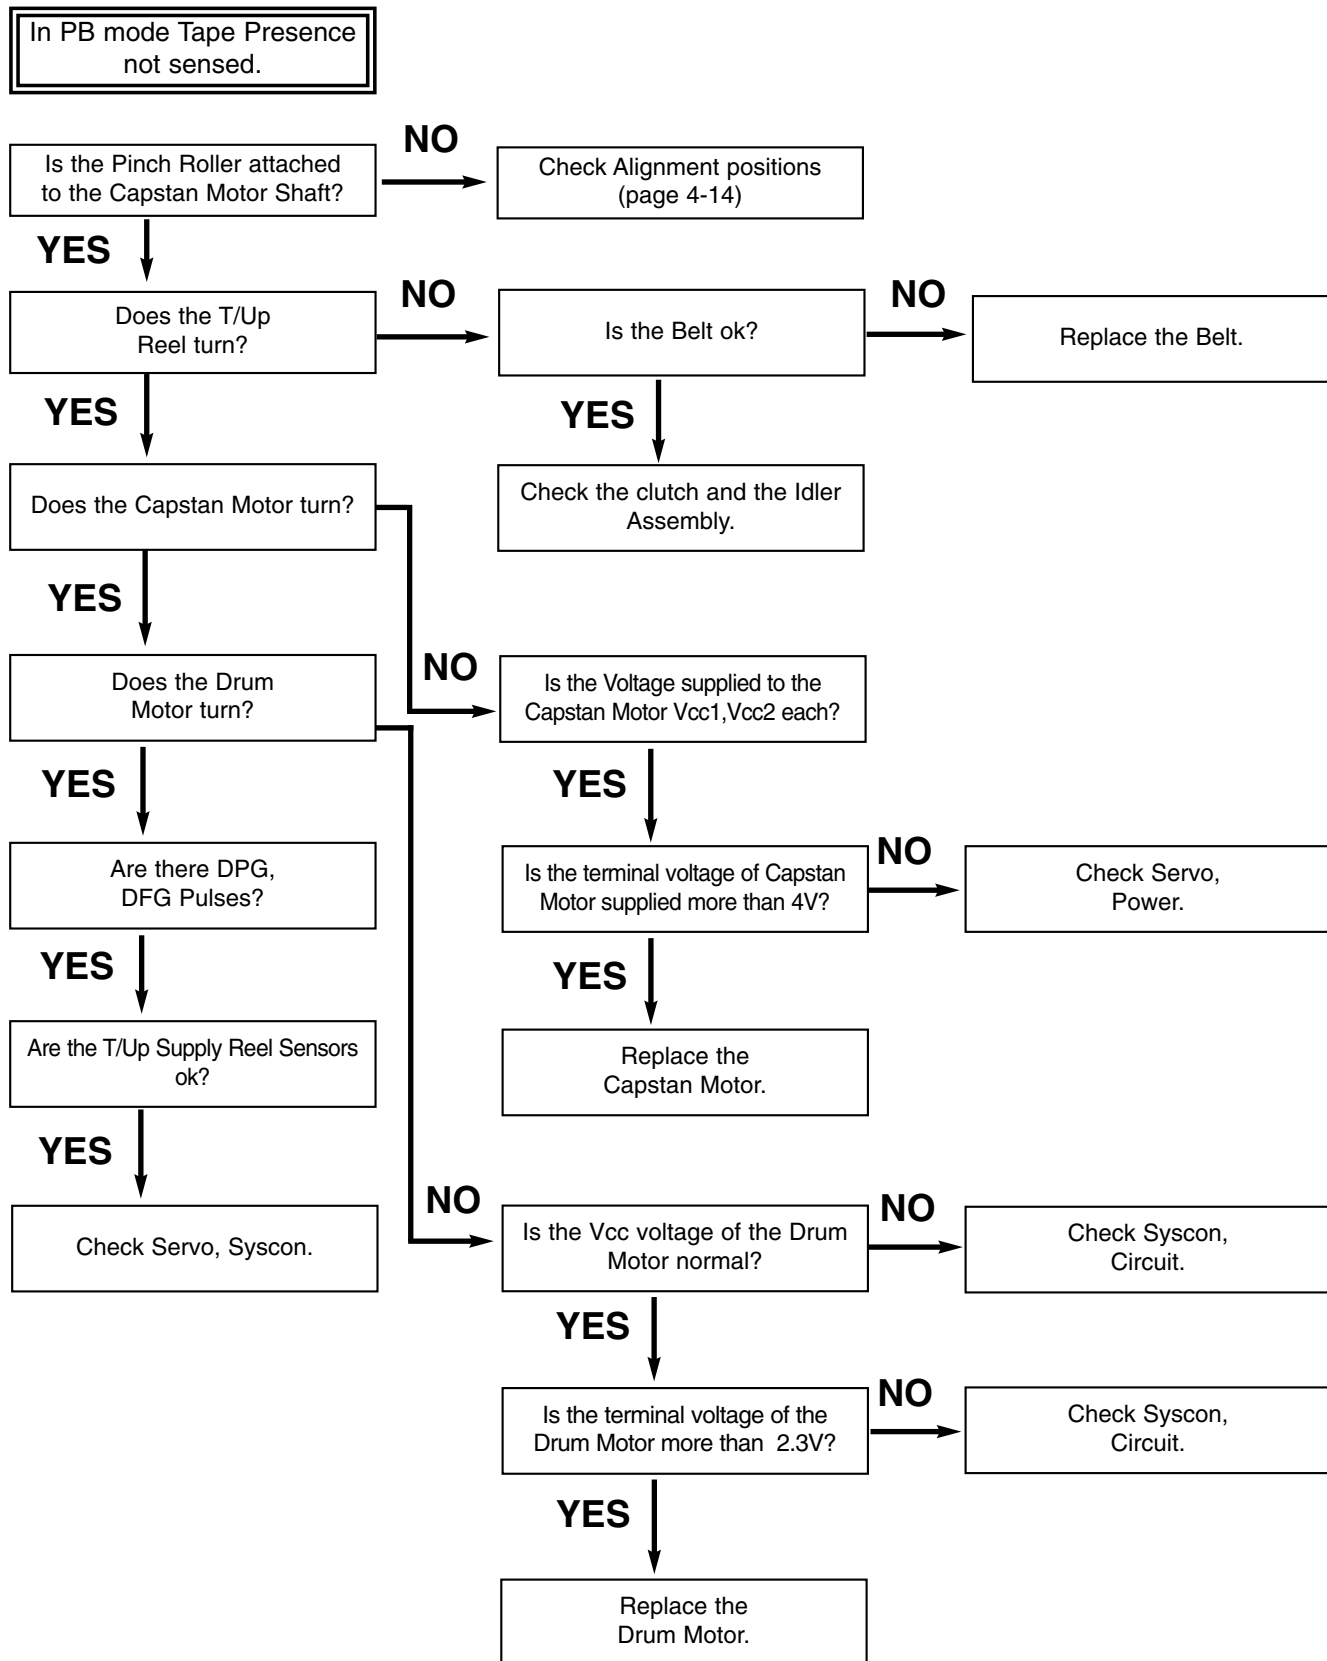


MECHANISM TROUBLESHOOTING GUIDE

2. Front Loading Mechanism

A.

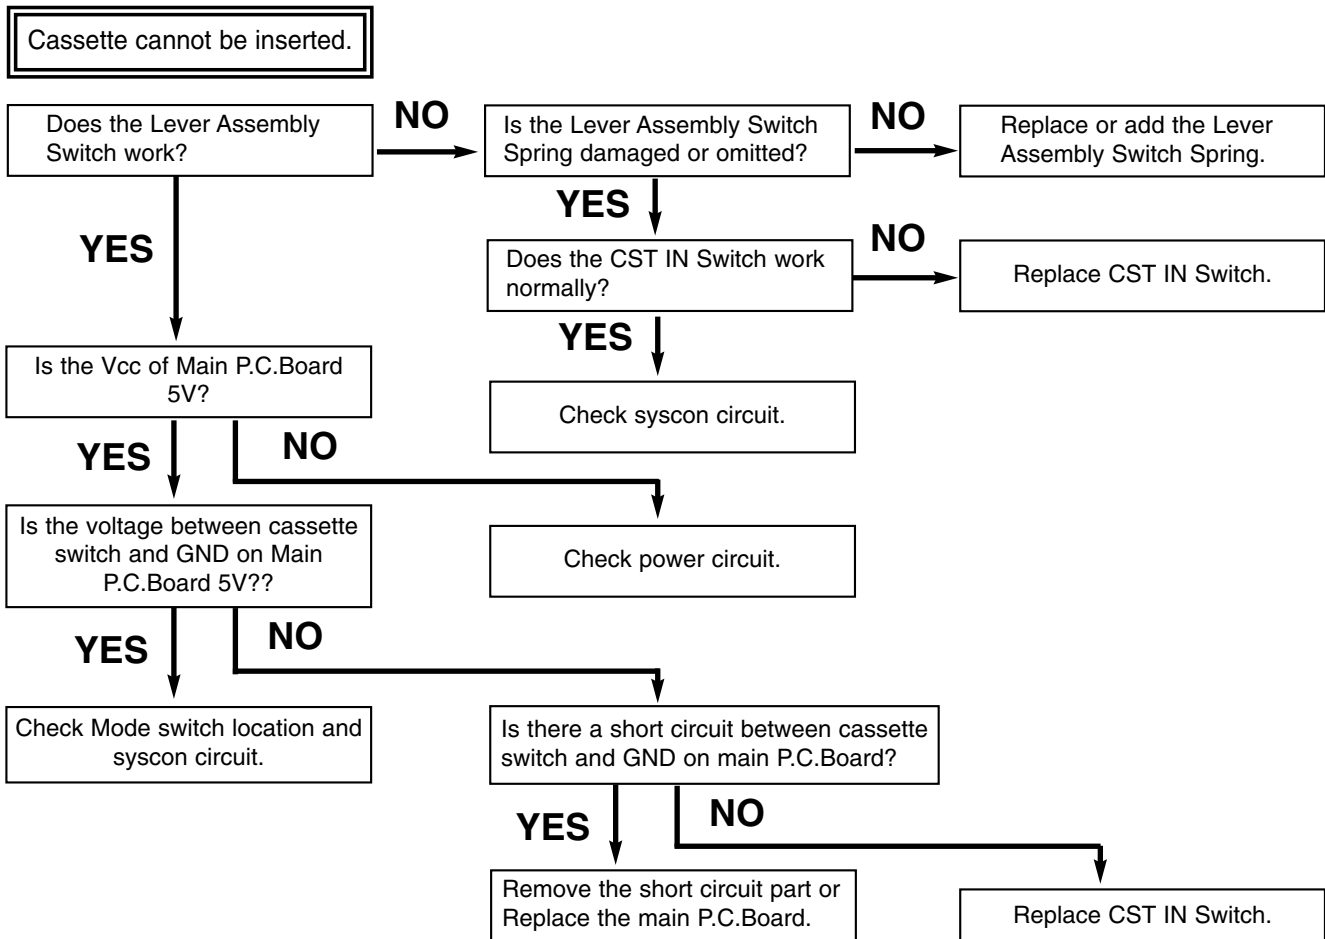


B.

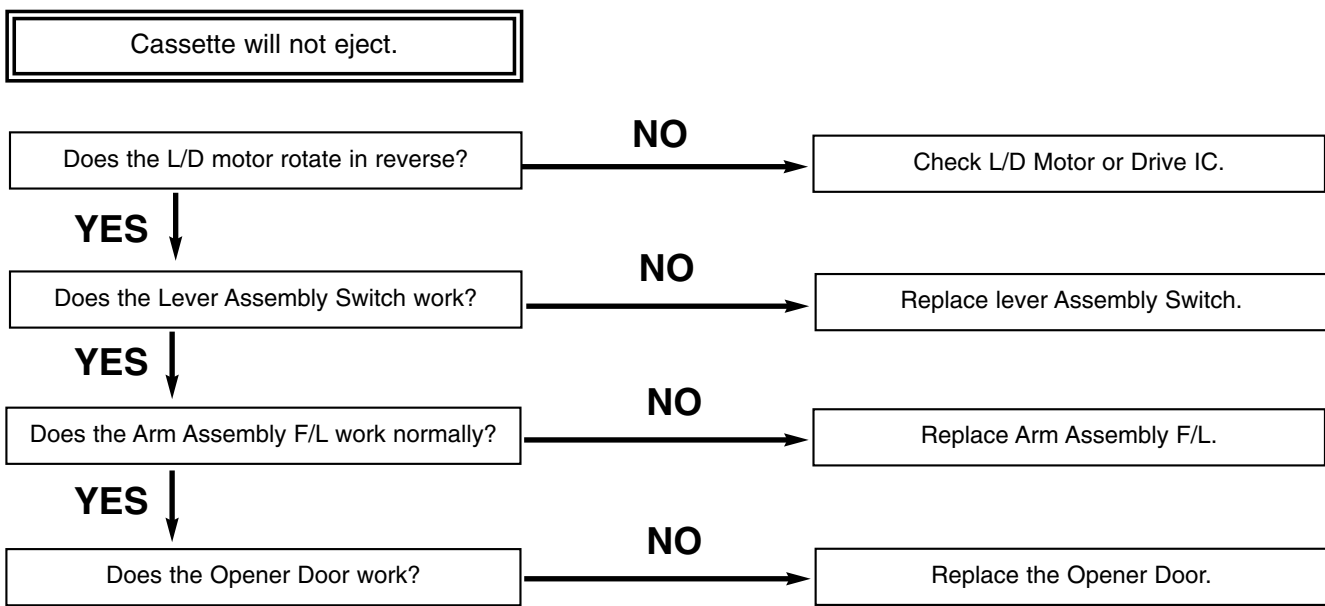


MECHANISM TROUBLESHOOTING GUIDE

C.

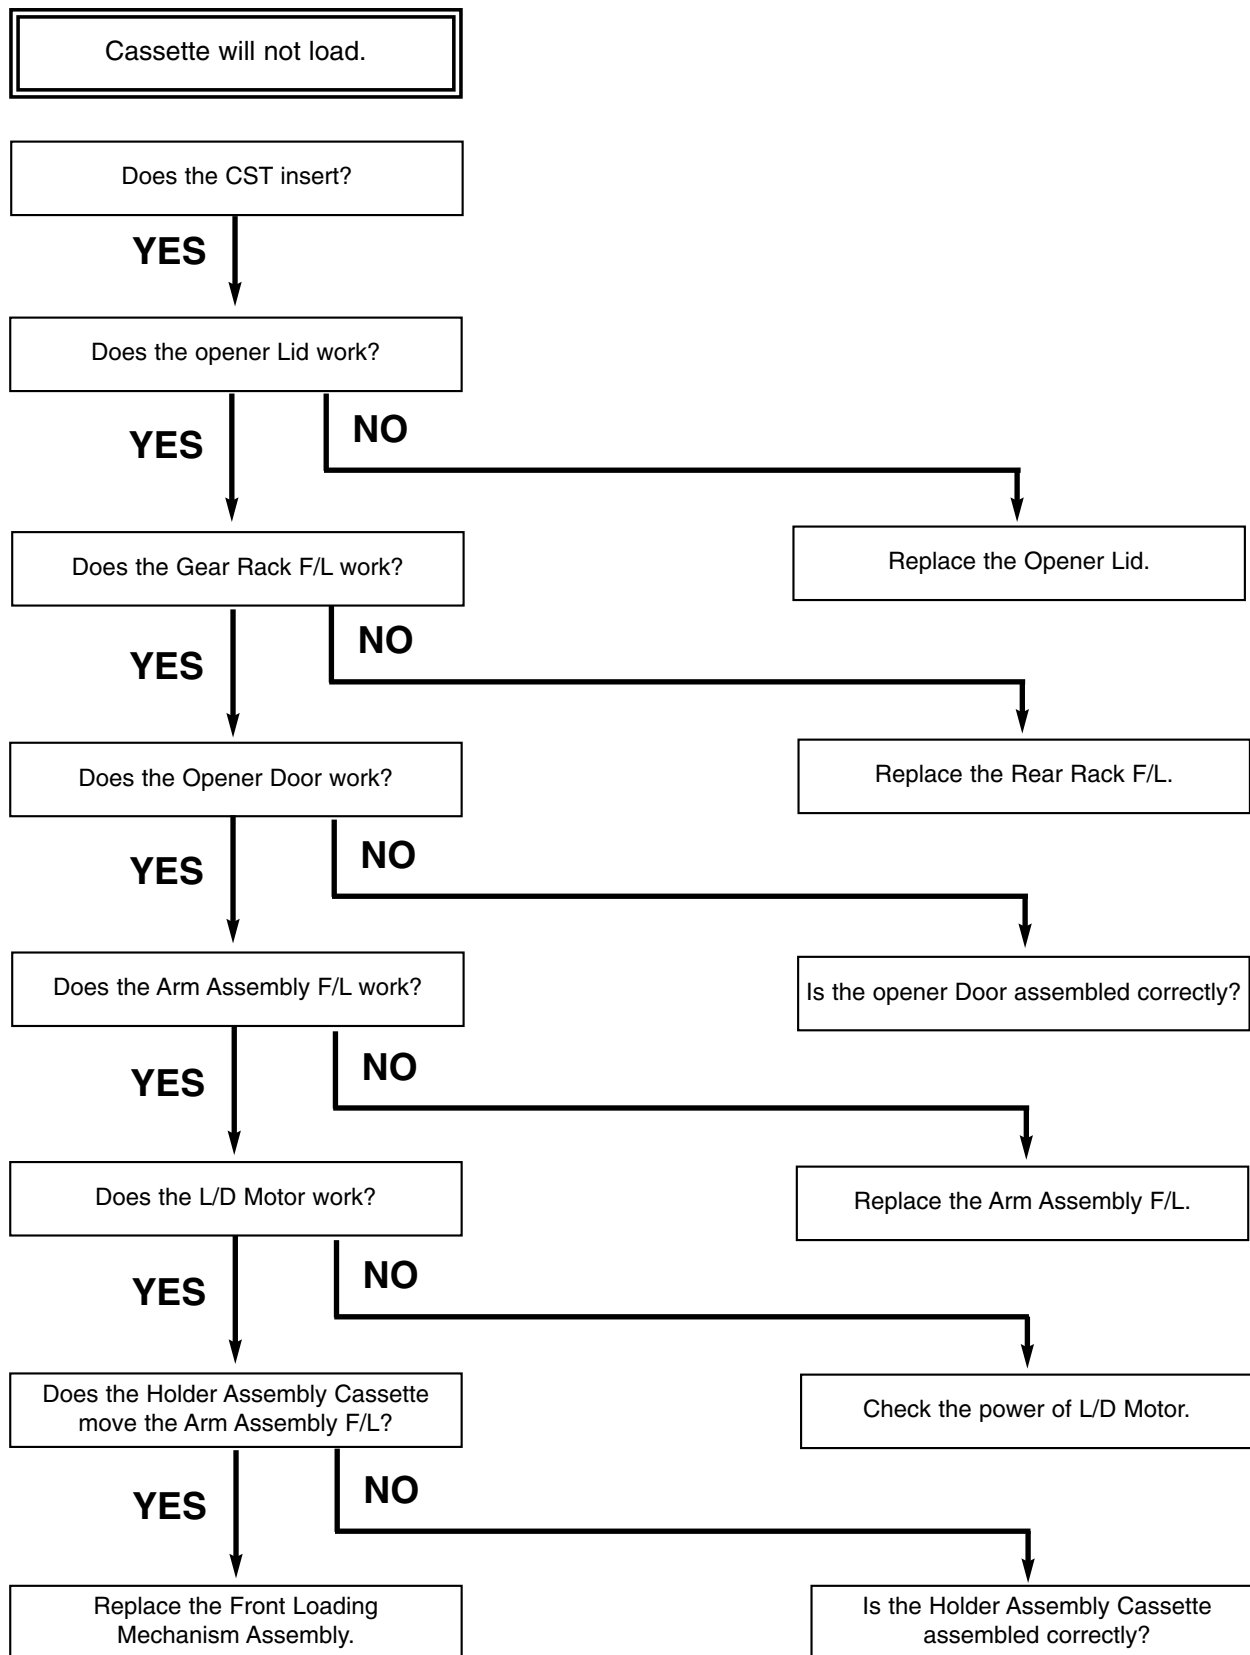

EXPLODED VIEWS


1. Front Loading Mechanism Section

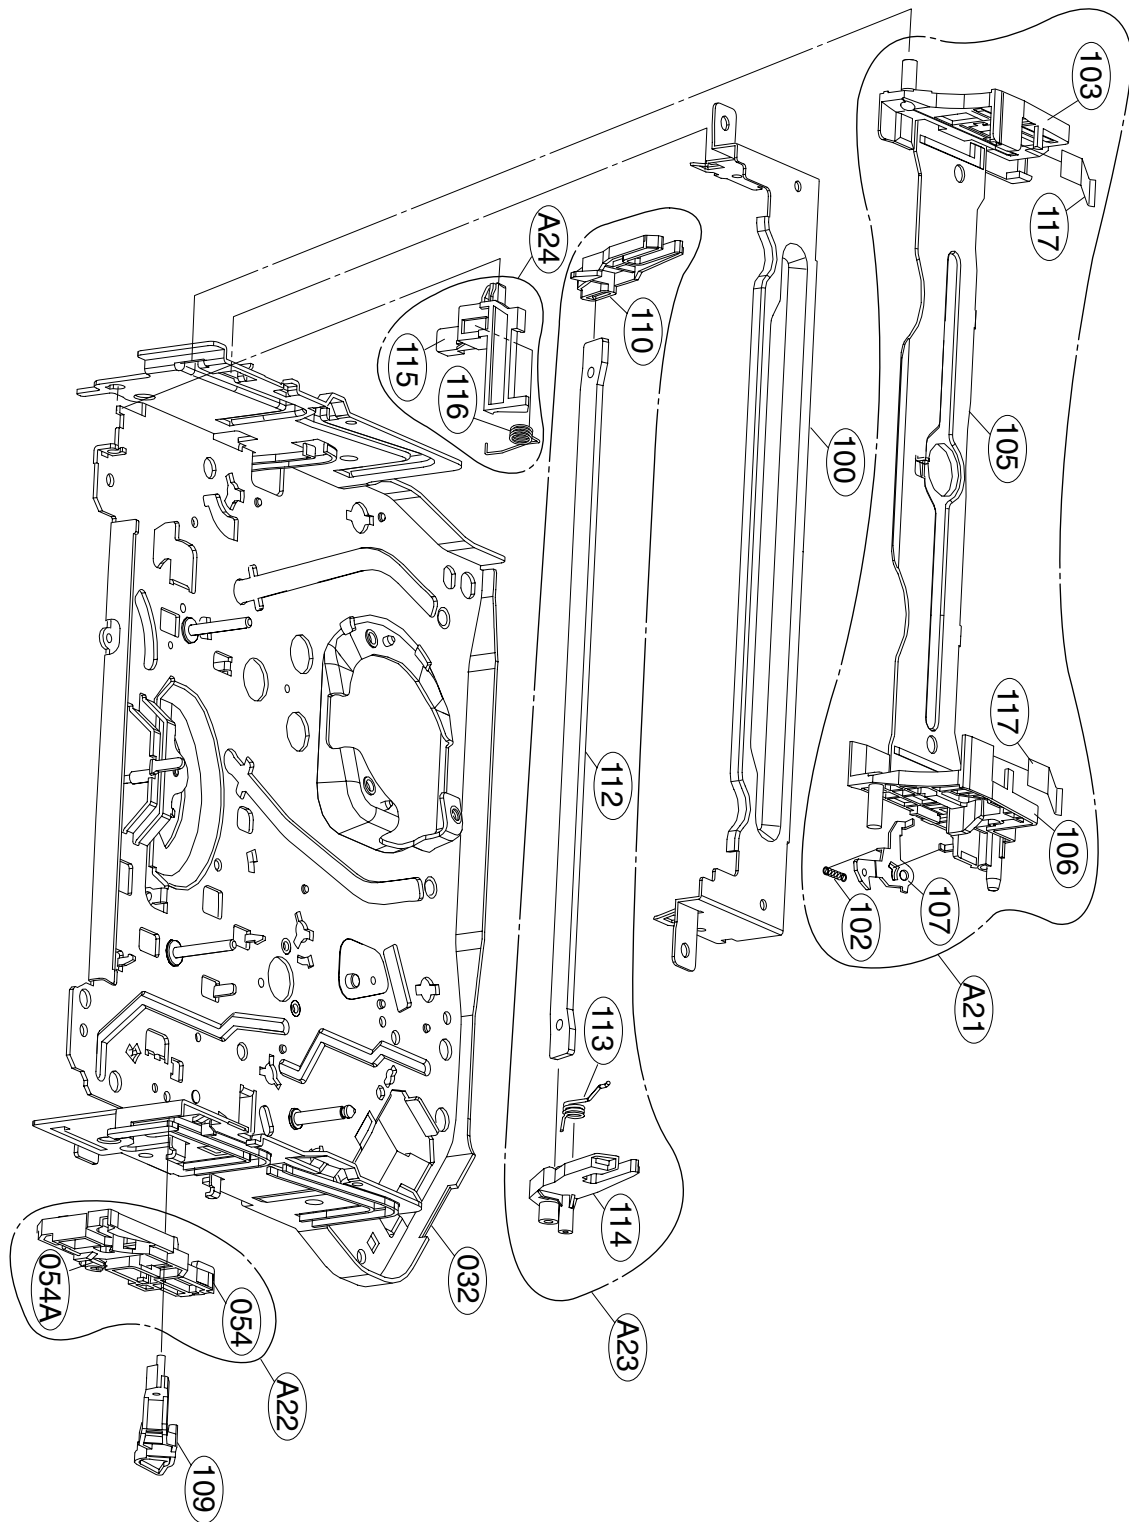

EXPLODED VIEWS


2. Moving Mechanism Section(1)

★ OPTIONAL PART

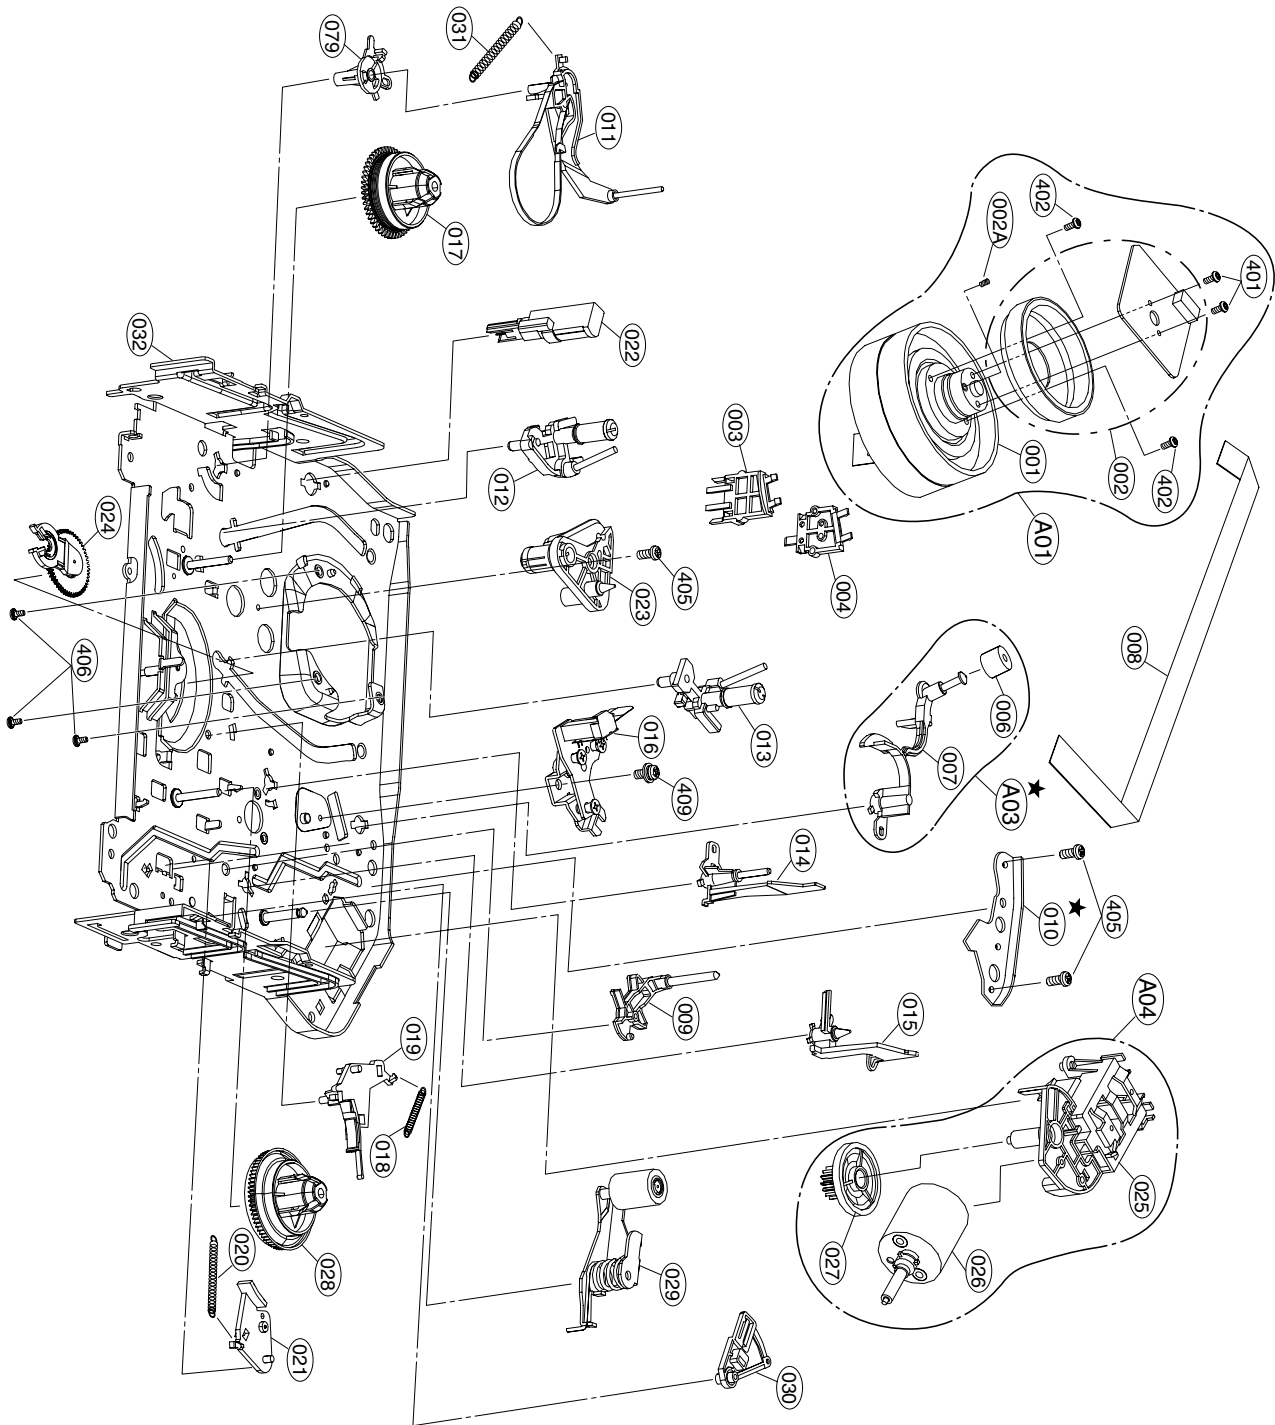

EXPLODED VIEWS

3. Moving Mechanism Section(2)

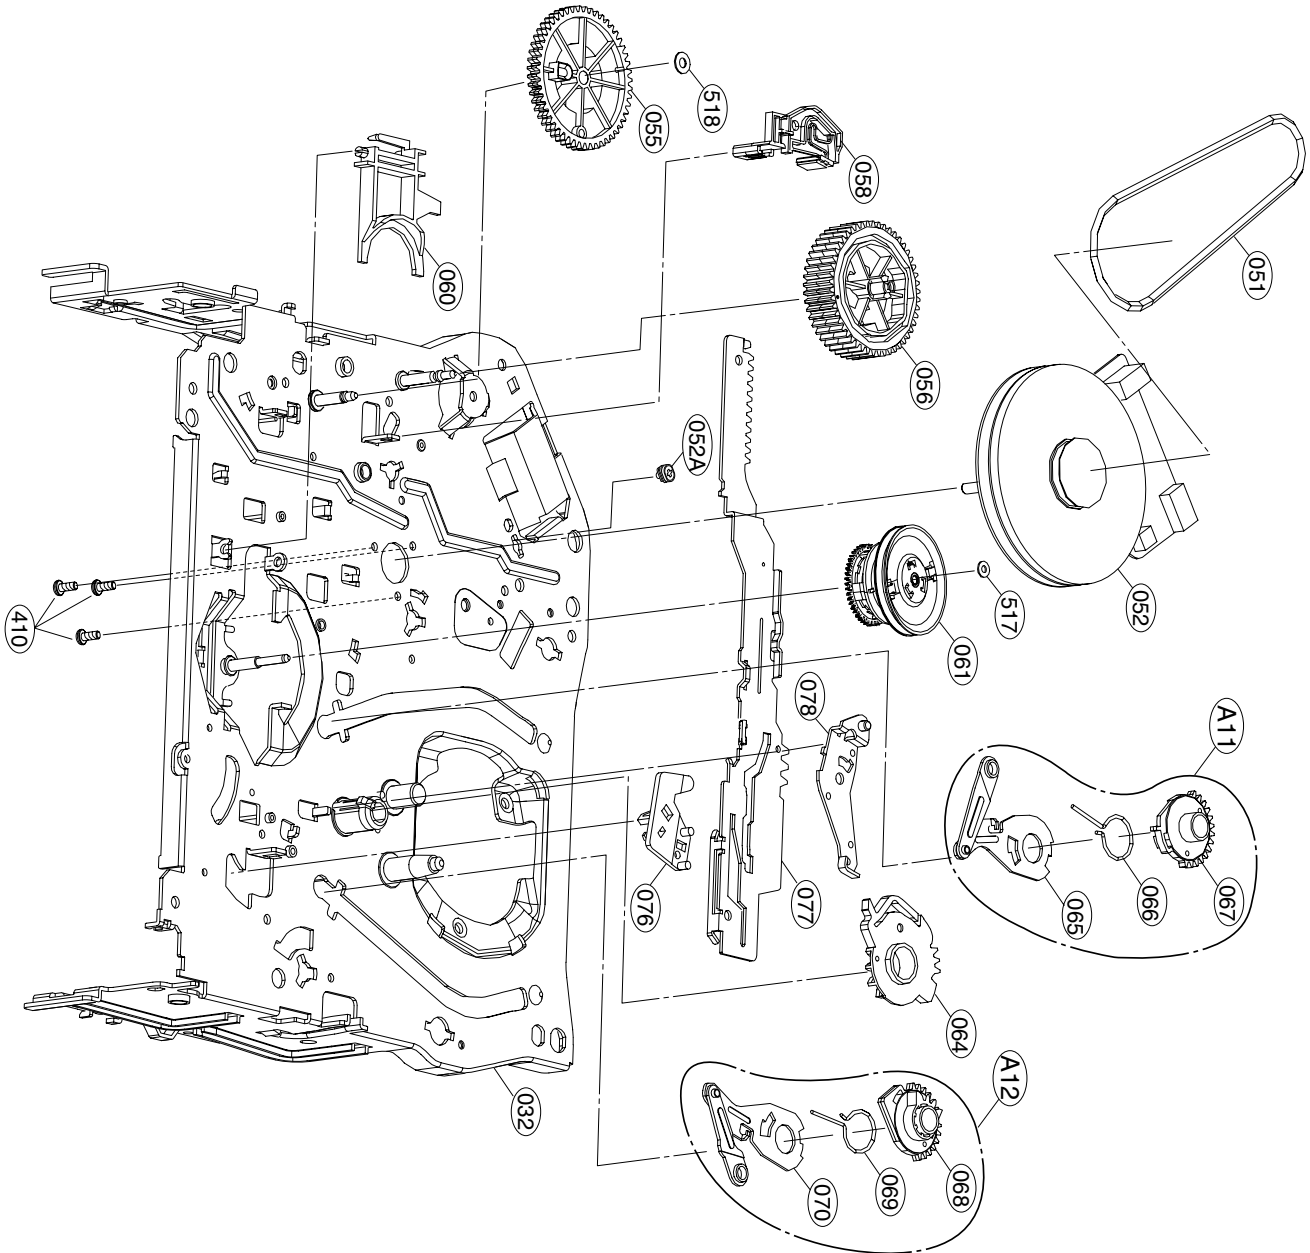

SECTION 5 MECHANISM

CONTENTS

DECK MECHANISM PARTS LOCATIONS

- Top View.....5-1
- Top View(without Tray Disc)5-1
- Bottom View5-1

DECK MECHANISM DISASSEMBLY

1. Holder Clamp.....5-2
 - 1-1. Clamp Assembly Disc5-2
 - 1-1-1. Plate Clamp5-2
 - 1-1-2. Magnet Clamp5-2
 - 1-1-3. Clamp Upper.....5-2
2. Tray Disc5-2
3. Base Assembly Sled5-3
 - 3-1. Gear Assembly Feed5-3
 - 3-2. Gear Assembly Middle.....5-3
 - 3-3. Gear Assembly Rack.....5-3
4. Rubber Rear.....5-3


5. Frame Assembly Up/Down.....5-4
6. Belt Loading.....5-4
7. Gear Pulley5-4
8. Gear Loading5-4
9. Guide Up/Down.....5-4
10. PWB Assembly Loading.....5-4
11. Base Main.....5-4

EXPLODED VIEW


1. Deck Mechanism Exploded View....5-5
-

DECK MECHANISM PARTS LOCATION


• Top View (With Tray)

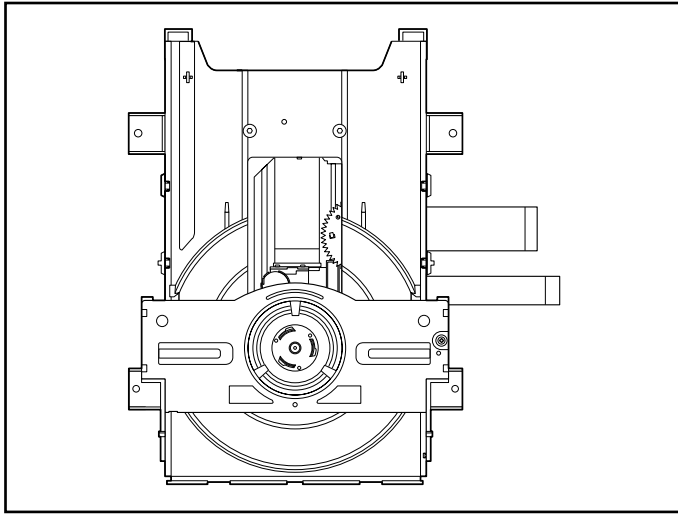

• Top View (Without Tray)

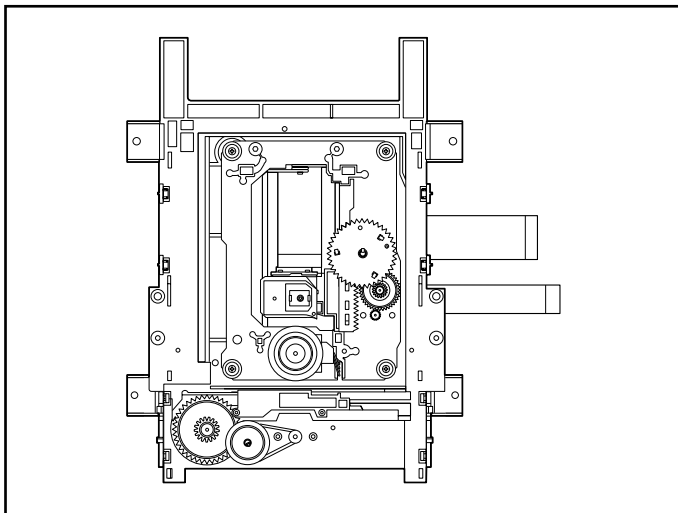

• Bottom View

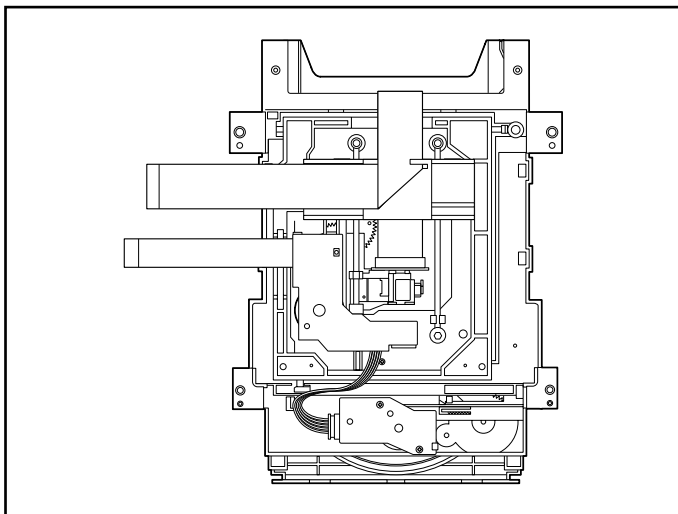


Procedure		Parts	Fixing Type	Disassembly	Figure
Starting No.					
	1	Holder Clamp	2 Screws, 2 Locking Tabs		5-1
1	2	Clamp Assembly Disc			5-1
1, 2	3	Plate Clamp			5-1
1, 2, 3	4	Magnet Clamp			5-1
1, 2, 3, 4	5	Clamp Upper			5-1
1	6	Tray Disc			5-2
1, 6	7	Base Assembly Sled			5-3
1, 2, 6	8	Gear Assembly Feed	4 Screws, 1 Connector 1 Locking Tabs		5-3
1, 2, 6, 8	9	Gear Middle			5-3
1, 2, 6, 8, 9	10	Gear Assembly Rack	1 Screw		5-3
1, 2, 7	11	Rubber Rear			5-3
1, 2, 7	12	Frame Assembly Up/Down	1 Screw	Bottom	5-4
1, 2	13	Belt Loading	1 Locking Tab		5-4
1, 2, 13	14	Gear Pulley			5-4
1, 2, 13, 14	15	Gear Loading	1 Locking Tab		5-4
1, 2, 7, 12, 13, 14	16	Guide Up/Down			5-4
1, 2, 13	17	PWB Assembly Loading	1 Locking Tab 1 Hook 2Screw	Bottom	5-4
1, 2, 7, 12, 13, 14, 15, 16, 17	18	Base Main	2 Locking Tabs		5-4

Note

When reassembling, perform the procedure in reverse order.

The "Bottom" on Disassembly column of above Table indicates the part should be disassembled at the Bottom side.

DECK MECHANISM DISASSEMBLY

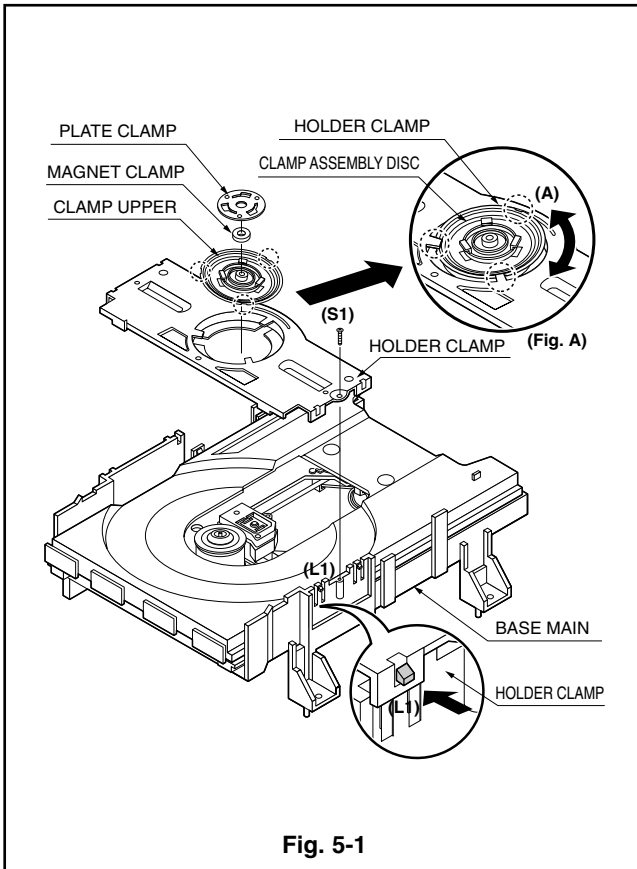

1. Holder Clamp (Fig. 5-1)

- 1) Release 1 Screws(S1).
- 2) Unhook 2 Locking Tabs(L1).
- 3) Lift up the Holder Clamp and then separate it from the Base Main.

1-1. Clamp Assembly Disc


- 1) Place the Clamp Assembly Disc as Fig. (A)
- 2) Lift up the Clamp Assembly Disc in direction of arrow(A).
- 3) Separate the Clamp Assembly Disc from the Holder Clamp.

1-1-1. Plate Clamp

- 1) Turn the Plate Clamp to counterclockwise direction and then lift up the Plate Clamp.

1-1-2. Magnet Clamp

1-1-3. Clamp Upper

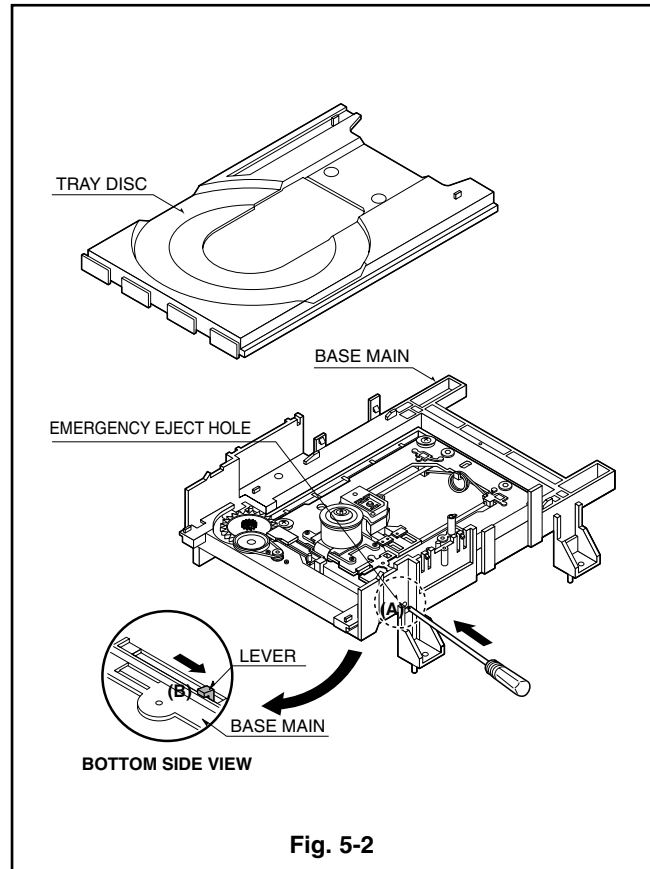

2. Tray Disc (Fig. 5-2)

- 1) Insert and push a Driver in the emergency eject hole(A) at the right side, or put the Driver on the Lever(B) of the Gear Emergency and pull the Lever(B) in direction of arrow so that the Tray Disc is ejected about 15~20mm.
- 2) Pull the Tray Disc until it is separated from the Base Main completely.

DECK MECHANISM DISASSEMBLY

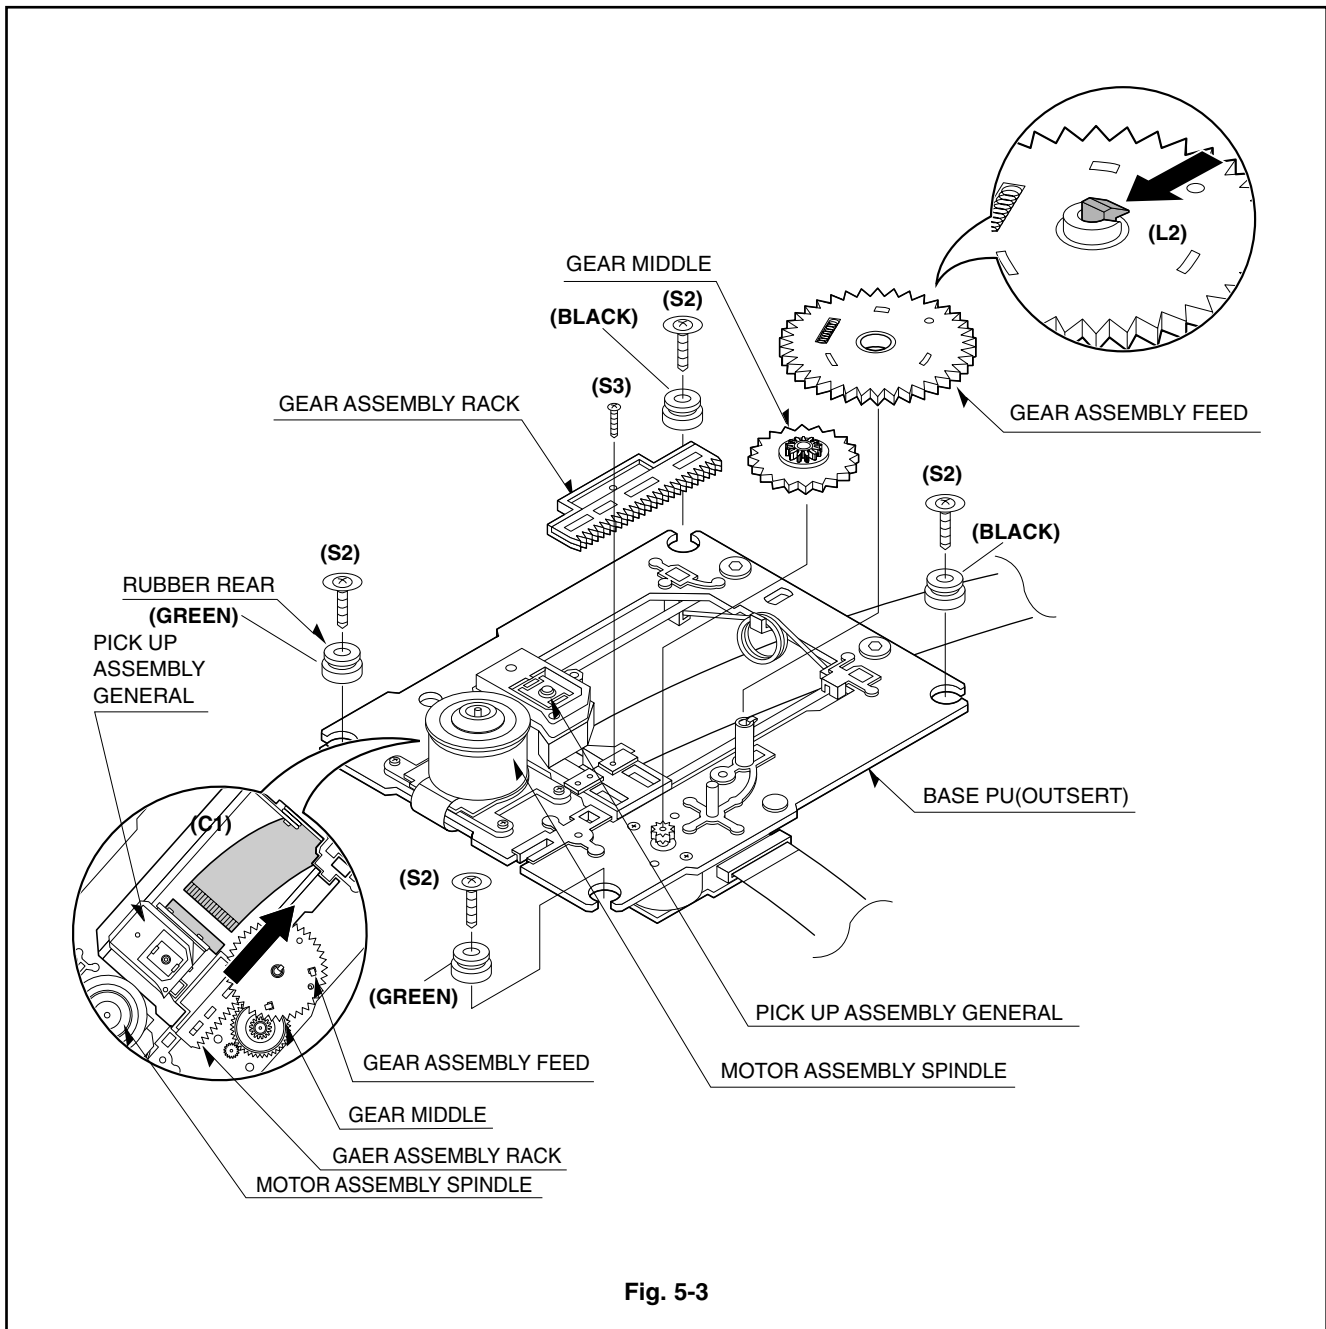


Fig. 5-3

3. Base Assembly Sled (Fig. 5-3)

- 1) Release 4 Screw(S2).
- 2) Disconnect the FFC Connector(C1)

3-1. Gear Assembly Feed

- 1) Unhook the Locking Tab(L2) in direction of arrow.

3-2. Gear Middle

3-3. Gear Assembly Rack

- 1) Release the Screw(S3)

4. Rubber Rear (Fig. 5-3)

DECK MECHANISM DISASSEMBLY

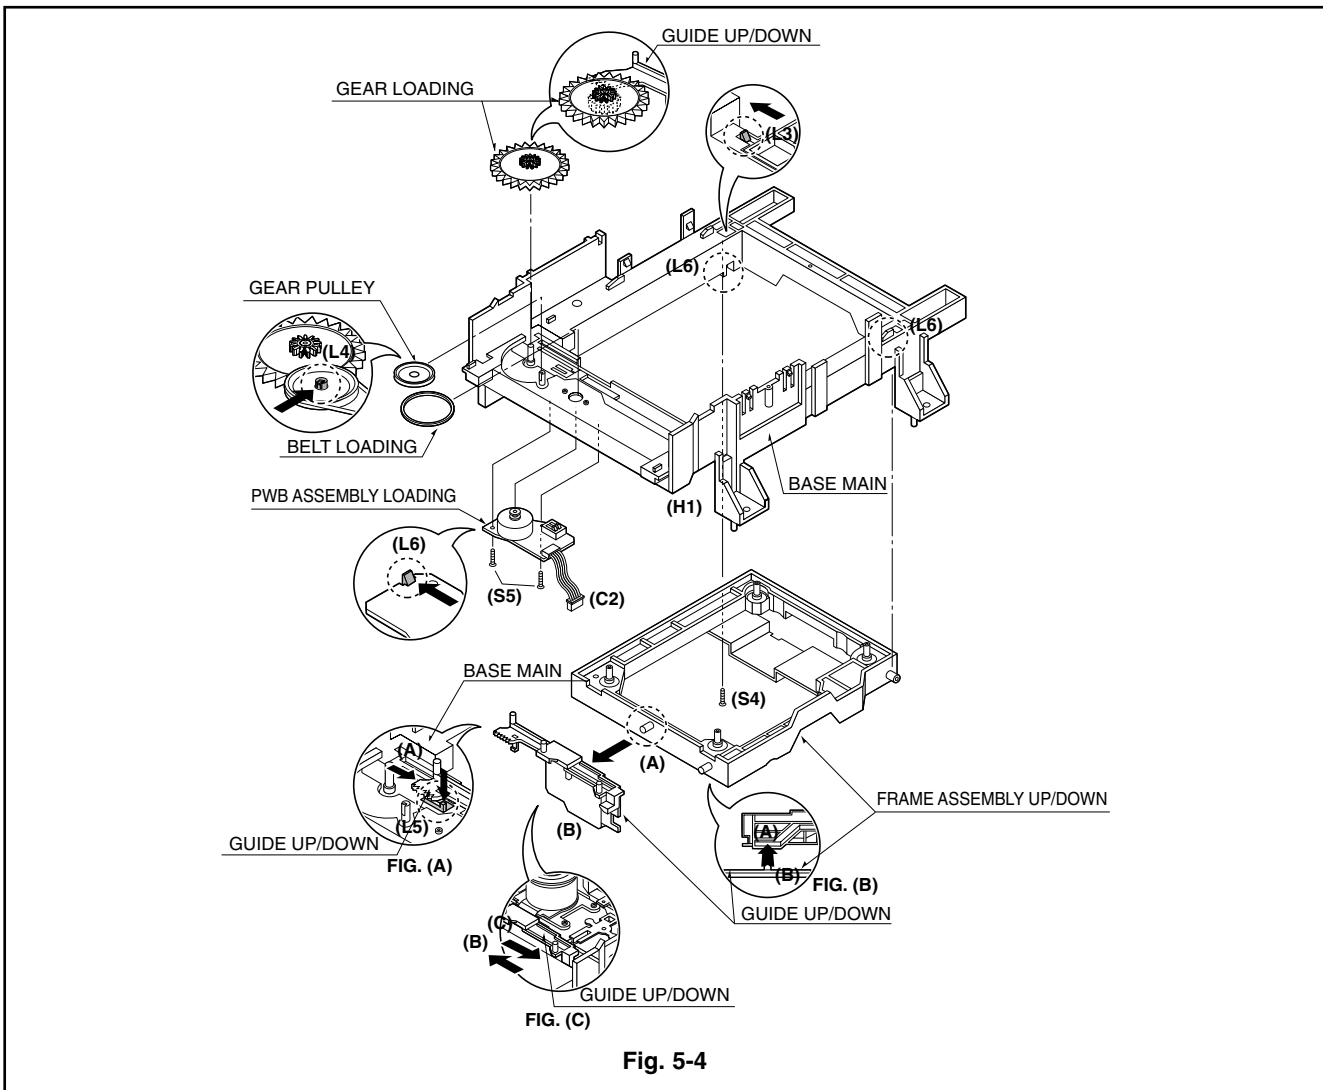


Fig. 5-4

5. Frame Assembly Up/Down

Note

Put the Base Main face down(Bottom Side)

- 1) Release the Screw(S4)
- 2) Unlock the Locking Tab(L3) in direction of arrow and then lift up the Frame Assembly Up/Down to separate it from the Base Main.

Note

- When reassembling move the Guide Up/Down in direction of arrow(C) until it is positioned as Fig.(C).
- When reassembling insert (A) portion of the Frame Assembly Up/Down in the (B) portion of the Guide Up/Down as Fig.(B)

6. Belt Loading(Fig. 5-4)

Note

Put the Base Assembly Main on original position(Top Side)

7. Gear pulley (Fig. 5-4)

- 1) Unlock the Locking Tab(L4) in direction of arrow(B) and then separate the Gear Pulley from the Base Main.

8. Gear Loading (Fig. 5-4)

9. Guide Up/Down (Fig. 5-4)

- 1) Move the Guide Up/Down in direction of arrow(A) as Fig.(A)
- 2) Push the Locking Tab(L5) down and then lift up the Guide Up/Down to separate it from the Base Main.

Note

When reassembling place the Guide Up/Down as Fig.(C) and move it in direction arrow(B) until it is locked by the Locking Tab(L5). And confirm the Guide Up/Down as Fig.(A)

10. PWB Assembly Loading

Note


Put the Base Main face down(Bottom Side)

- 1) Release 2 Screws(S5)
- 2) Unhook the Loading Motor Connector (C2) from the Hook (H1) on the Base Main.
- 3) Unlock 2 Locking Tabs(L6) and separate the PWB Assembly Loading from the Base Main.

11. Base Main(Fig. 5-4)

EXPLODED VIEWS

1. Deck Mechanism Exploded View

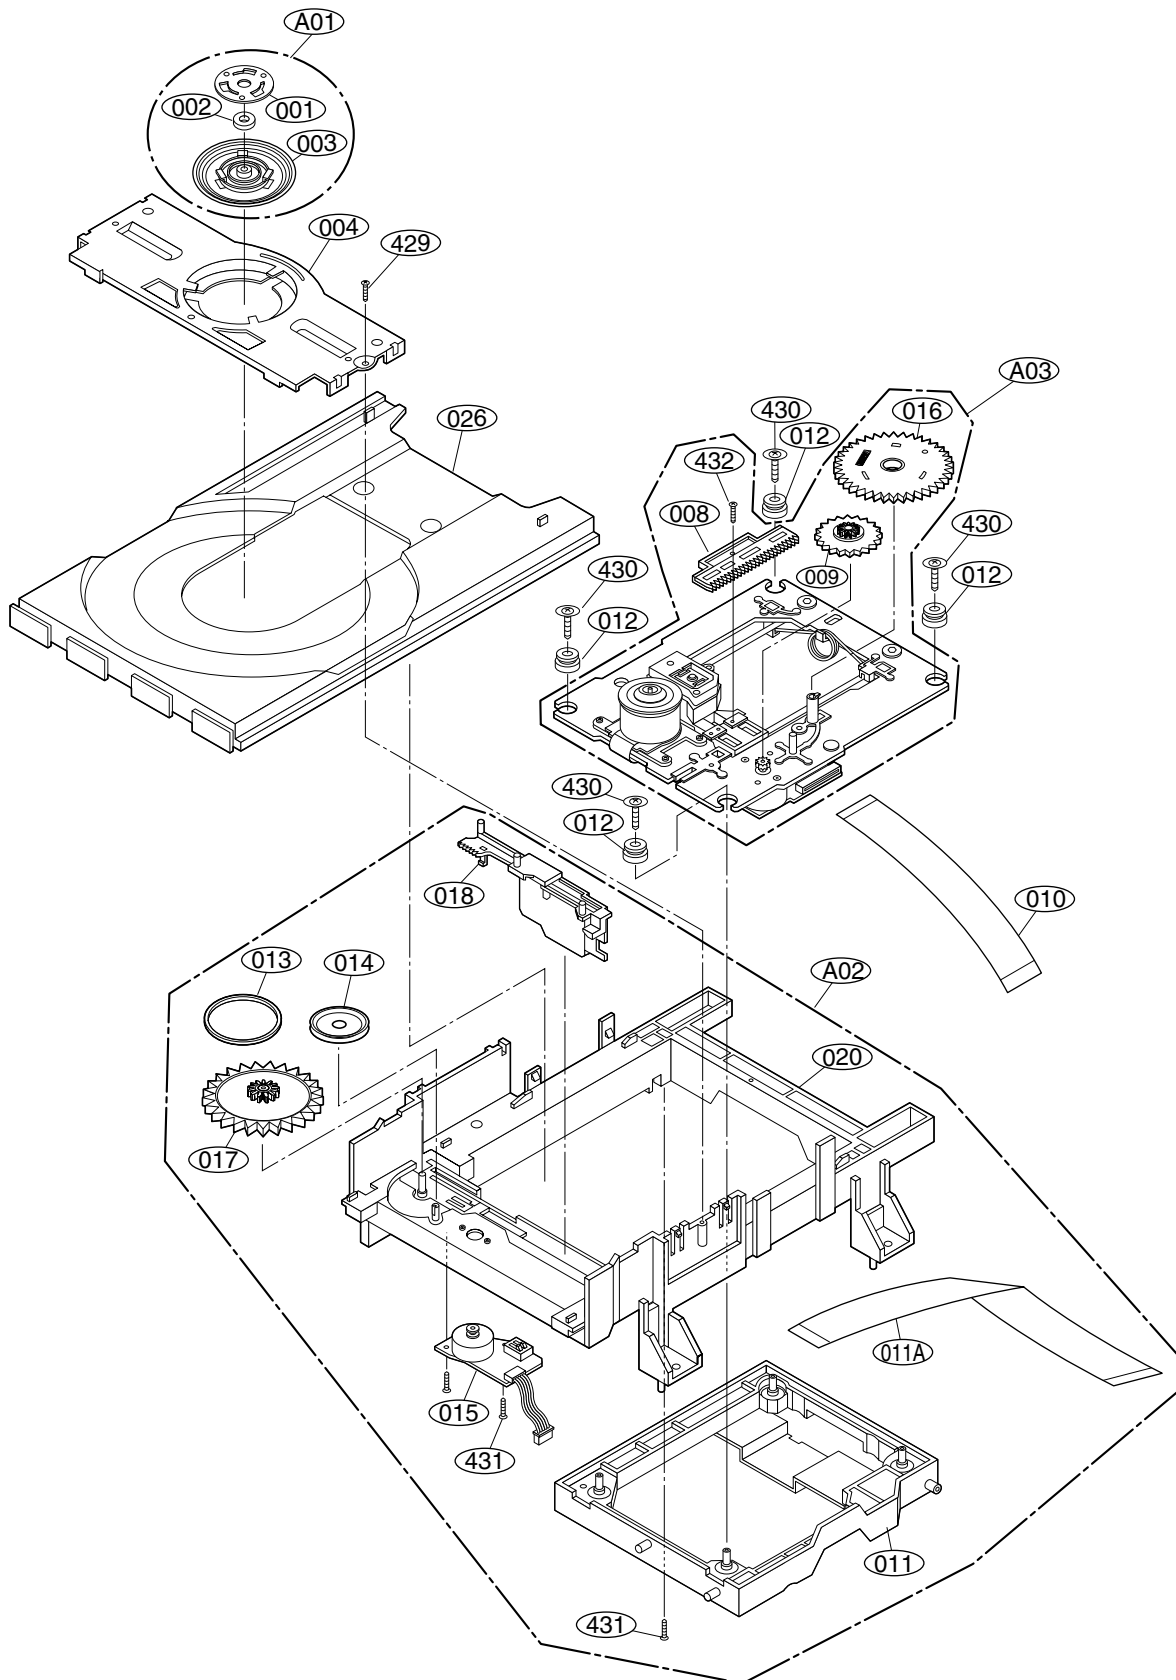

NOTES) ⚠ Warning
 Parts that are shaded are critical
 With respect to risk of fire or
 electrical shock.

SECTION 6 REPLACEMENT PARTS LIST

MODEL: <A>: HV-DX1E : HV-DX1SP <C>: HV-DX1EV

Mechanical Section

RUN DATE:14.MAY.2002
 NSP:NOT SERVICE PART

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
DVD SECTION									
ASSEMBLY SECTION									
		A01	LG4861R-0015A	O	O	O	CLAMP ASSEMBLY	DISC(DP-5) DI	
		A02	LG3041R-0059A	O	O	O	BASE ASSEMBLY	SUB, MAIN (DVD+VCR) DI	
		A03	LG3041R-0065A	O	O	O	BASE ASSEMBLY	SUB SLED(DP5-4V, DVD+VCR) DI	
		A26	LG6721RF0353A	O	O	O	DECK ASSEMBLY,VIDEO	DP5-4V(DVD+VCR) DI	
PARTS SECTION									
		001	LG3300R-0547A	O	O	O	PLATE	CLAMP	NSP
		002	LG5016H-1016B	O	O	O	MAGNET	CLAMP(LDM-R608,10*5,1*1.5T)	NSP
		003	LG4860R-0006A	O	O	O	CLAMP	UPPER	NSP
		004	LG4930R-0171A	O	O	O	HOLDER	CLAMP	
		008	LG4470R-0047B	O	O	O	GEAR	ASSY RACK (DI)	
		009	LG4470R-0053A	O	O	O	GEAR	MIDDLE	
		011	LG3210R-0036A	O	O	O	FRAME	UP/D	
		013	LG4400R-0006A	O	O	O	BELT	LOADING	
		014	LG4470R-0055A	O	O	O	GEAR	PULLEY	
		015	LG6871R25130A	O	O	O	PWB(PCB) ASSEMBLY,OTHERS	SUB,L/D (DP-4V,DVD+VCR) DI	
		016	LG4470R-0050B	O	O	O	GEAR	ASSY FEED (DI)	
		017	LG4470R-0056A	O	O	O	GEAR	LOADING	
		018	LG4974R-0023A	O	O	O	GUIDE	UP/DOWN	
		020	LG3040R-0024A	O	O	O	BASE	MAIN	NSP
		026	LG3390R-0005A	O	O	O	TRAY	DISC	
SCREW									
		429	LG1SZZR-0012A	O	O	O	SCREW,	B-TITE	
		430	LG1SZZH-1003A	O	O	O	SCREW,	+ D2.0 6MM SWRCH16A/NIY 4.5MM	
		431	LG1SZZH-1007B	O	O	O	SCREW,DRAWING	+ D2.0 6MM SWRCH16A/ZNBK 4MM 1	
		432	LG1SZZR-0011A	O	O	O	SCREW,	MACHINE	
VCR SECTION									
ASSEMBLY SECTION									
		A00	LG6721RF0760E	O	O	O	DECK ASSEMBLY,VIDEO	DI D35(N) (4HF_21(SONY), PAL,	NSP
		A01	LG6723R-0403D	O	O	O	DRUM(CIRC) ASSEMBLY	D35-6CH PAL(8P6C)	
		A03	LG4261R-0025A	O	O	O	ARM ASSY	CLEANER	
		A04	LG4811RF0038A	O	O	O	BRACKET ASSEMBLY	L/D(S)	
		A11	LG4471R-0005A	O	O	O	GEAR ASSY	P3	
		A12	LG4471R-0004A	O	O	O	GEAR ASSY	P2	
		A21	LG4931R-0047A	O	O	O	HOLDER ASSY	CST	
		A22	LG4471R-0006A	O	O	O	GEAR ASSY	RACK F/L	
		A23	LG4261R-0023A	O	O	O	ARM ASSY	F/L	
		A24	LG4510R-0046A	O	O	O	LEVER	ASSY SWITCH	
PARTS SECTION									
		001	LG6723R-0306D	O	O	O	DRUM(CIRC) ASSEMBLY	SUB D35-6CH (8P6C)	NSP
		002	LG4680R-B005A	O	O	O	MOTOR(MECH)	DRUM I2OAL05 SEJIN-SANKYO ICLE	
		002A	LG5202R00002C	O	O	O	BRUSH,CARBON	ASSY D33 (TIP+2 SPRING) 1.4,	
		003	LG4930R-0284A	O	O	O	HOLDER,SHELF	FPC(6CH)	
		004	LG5006R-0034A	O	O	O	CAP	FPC	
		006	LG4580R-0004A	O	O	O	ROLLER	CLEANER	NSP
		007	LG4260R-0039A	O	O	O	ARM	CLEANER	NSP
		008	LG6850R-HG18Z	O	O	O	CABLE,FLAT	P=1.25 FFC UL2896(0.05X0.8) 7	
		009	LG4260R-0038A	O	O	O	ARM	T/UP(D35)	
		011	LG4261R-0022A	O	O	O	ARM ASSY	TENSION(D35)	
		012	LG3041R-0037A	O	O	O	BASE ASSY	P2	
		013	LG3041R-0038A	O	O	O	BASE ASSY	P3	
		014	LG3041R-0039A	O	O	O	BASE ASSY	P4	
		015	LG5870R-0005A	O	O	O	OPENER	LID(D35)	
		010	LG4810R-0125A	O	O	O	BRACKET	CHASSIS	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS		
			016				LG3041R-0036A	O O O	BASE ASSEMBLY	A/C HEAD (ALPS)	
			017				LG4408R-0003A	O O O	REEL	S	
			018				LG4970R-0140A	O O O	SPRING	COIL RS D35	
			019				LG4421R-0008A	O O O	BRAKE ASSEMBLY	RS	
			020				LG4970R-0128A	O O O	SPRING	COIL D35 (TB)	
			021				LG4421R-0006A	O O O	BRAKE ASSY	T	
			022				LG6520D00002A	O O O	HEAD(CIRC)	D35 FE ST FE HEAD	
			023				LG3040R-0057A	O O O	BASE	LOADING	
			024				LG4261R-0029A	O O O	ARM ASSEMBLY	IDLER (N)	
			025				LG4810R-0118A	O O O	BRACKET	L/D(S)	NSP
			026				LG4680R-D002A	O O O	MOTOR(MECH)	LOADING MDB2B66 SANKYO D35 ASP	
			027				LG4470R-0093A	O O O	GEAR	WHEEL	NSP
			028				LG4408R-0004A	O O O	REEL	T	
			029				LG4261R-0019A	O O O	ARM ASSY	PINCH	
			030				LG4510R-0043A	O O O	LEVER	T/UP	
			031				LG4970R-0123A	O O O	SPRING	COIL TENSION(D35)	
			032				LG3141R-0040A	O O O	CHASSIS ASSY	D35	NSP
			051				LG4400R-0005A	O O O	BELT	CAPSTAN	
			052				LG4680R-A007A	O O O	MOTOR(MECH)	CAPSTAN F2QVB06 SANKYO D35 ASR	
			052A				LG4980R-0023A	O O O	SUPPORTER	CAPSTAN(D35)	
			054				LG4470R-0100A	O O O	GEAR	RACK F/L	
			054A				LG4970R-0124B	O O O	SPRING	COIL D35 (RACK F/L)	
			055				LG4470R-0097A	O O O	GEAR	DRIVE(D35)	
			056				LG4470R-0096A	O O O	GEAR	CAM(D35)	
			058				LG4421R-0007A	O O O	BRAKE ASSY	CAPSTAN	
			060				LG4510R-0040A	O O O	LEVER	F/R(D35)	
			061				LG4265R-0006A	O O O	CLUTCH ASSEMBLY	D35 (N)	
			064				LG4470R-0098A	O O O	GEAR	SECTOR(D35)	
			065				LG4261R-0021A	O O O	ARM ASSY	P3	NSP
			066				LG4970R-0122A	O O O	SPRING	COIL D35	NSP
			067				LG4470R-0095A	O O O	GEAR	P3	NSP
			068				LG4470R-0094A	O O O	GEAR	P2	NSP
			069				LG4970R-0122A	O O O	SPRING	COIL D35	NSP
			070				LG4261R-0020A	O O O	ARM ASSY	P2	NSP
			076				LG4510R-0047A	O O O	LEVER	SPRING	
			077				LG3300R-M116A	O O O	PLATE	SLIDER	
			078				LG4510R-0041A	O O O	LEVER	TENSION	
			079				LG3040R-0056A	O O O	BASE	TENSION(D35)	
			100				LG3300R-M118A	O O O	PLATE	TOP(D35)	
			102				LG4970R-0130A	O O O	SPRING	COIL D35 (STOPPER)	
			103				LG4930R-0276A	O O O	HOLDER,SHELF	SIDE(L)	NSP
			105				LG4930R-0274A	O O O	HOLDER,SHELF	CST	NSP
			106				LG4930R-0275A	O O O	HOLDER,SHELF	SIDE(R)	NSP
			107				LG4510R-0044A	O O O	LEVER	STOPPER	NSP
			109				LG5870R-0004A	O O O	OPENER	DOOR	
			110				LG4260R-0035A	O O O	ARM	F/L(L)	NSP
			112				LG3070R-0002A	O O O	BODY	F/L	NSP
			113				LG4970R-0127A	O O O	SPRING	COIL D35 (F/L(R))	NSP
			114				LG4260R-0036A	O O O	ARM	F/L(R)	NSP
			115				LG4510R-0042A	O O O	LEVER	SWITCH	
			116				LG4970R-0138A	O O O	SPRING	COIL D35 SWITCH	
			117				LG3300R-M137A	O O O	PLATE	SPRING CST	
SCREW											
			401				LG1MEC0261518	O O O	SCREW MACHINE,PAN HEAD SPR W	#NAME?	
			402				LG1MPC0261418	O O O	SCREW MACHINE,PAN HEAD	D 2.6 L 4.0 MSWR3/FZY	
			405				LG1SZZR-0031B	O O O	SCREW,DRAWING	+ 1 D2.6 L5.8 SWRCH16A/FZY TAP	
			406				LG1MEC0302018	O O O	PAN HEAD MACHINE SCREW S/W +	D 3.0 L 6.0 MSWR3/FZY	
			409				LG1SZZR-0032B	O O O	SCREW,DRAWING	+ 1 D2.6 L5.0 SWRCH18A/FZY TAP	
			410				LG1APF0262218	O O O	SCREW TAP TITE(B),PAN HEAD	#NAME?	
WASHER											
			517				LG1WZZR-0004D	O O O	WASHER	STOPPER	
			518				LG1WZZR-0004A	O O O	WASHER	STOPPER	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
CABINET & MAIN FRAME SECTION									
ASSEMBLY SECTION									
		A42	LG3501R-3142A		O	O	BOARD ASSEMBLY	KEY-B DCY503CPQ NA6SSS (DI)	
		A43	LG3721R-F262D			O	PANEL ASSEMBLY,FRONT	FRONT (DCY503CPQ NA6SSS)	
		A46	LG3501R-4216A		O		BOARD ASSEMBLY	SCART DI DCY503CIQ.NA4USS	
		A46	LG3501R-4216B			O	BOARD ASSEMBLY	LG COMBI DI DCY503CPQ.NA3GSS	
		A46A	LG6871R-2305B		O	O	PWB(PCB) ASSEMBLY,TOTAL	DVD DC593NSQ NA3FLL (DI)	
		A49	LG3501R-3141A		O	O	BOARD ASSEMBLY	TIMER DCY503CPQ NA6SSS (DI)	
PARTS SETION									
		250	LG3110R-P009A		O	O	CASE	TOP(DVD+VCR)	
		260	LG3211R-0039C		O	O	FRAME ASSEMBLY	MAIN(DVD+VCR) FCC GND	NSP
		276	LG4930R-0298B		O	O	HOLDER,SHELF	TIMER PWB(D-V-RIB CUTTING)	
		280	LG3720R-F200D		O	O	PANEL,FRONT	FRONT (DCY503CPQ NA6SSS)	NSP
		283	LG3580R-V006Y			O	DOOR	CST (DCY503CPQ NA6SSS)	
		283	LG3580R-V006Z		O		DOOR	CST (DCY503CIQ NA4USS)	
		284	LG442-681A		O	O	SPRING	DOOR	
		285	LG3581R-T046A		O	O	DOOR ASSEMBLY	TRAY (SANYO)	
	△	300	LG6410RBHV02C		O		POWER CORD	MP5005SC/HO3VHH2-F VOLEX BSI 1	
	△	300	LG6410RCHP02B			O	POWER CORD	HIT-102/H0VHH2-F(WITH CORE) HI	
		320	LG3720R-D050L		O	O	PANEL,FRONT	BACK(DCY503CPQ NA6SSS)	
		323	LG3111R-0089C		O	O	CASE ASSEMBLY	PRE-AMP (02-PAL)	
		330	LG3140R-0042A		O	O	CHASSIS	MAIN(DVD+VCR)	
SCREW									
		452	LG353-051A		O	O	SCREW	SPECIAL	
		457	LG353-051E		O	O	SCREW	SPECIAL (3X12)	
		462	LG353-085E		O	O	SCREW,DRAWING	+ 3 D4.0 L10.0 MSWR3/FZMCW-2	
		463	LG353-051B		O	O	SCREW	SPECIAL	
		465	LG353-046K		O	O	SCREW	SPECIAL (3X10 B.K)	
		467	LG353-051G		O	O	SCREW,DRAWING	+ 2 D3.0 L8.0 MSWR3/FN TB ROUN	
PACKING & ACCESSORY SECTION									
		801	LG3835RP0076S			O	INSTRUCTION ASSEMBLY	DCY503CPQ NA3GSS	
		801	LG3835RP0076T			O	INSTRUCTION ASSEMBLY	DCY503CPQ NA6SSS	
		801	LG3835RP0076X		O		INSTRUCTION ASSEMBLY	DCY503CIQ NA4USS	
		802	LG3890R-H790J		O		BOX	DCY503CIQ NA4USS SWM3-A 1.464	
		802	LG3890R-H790K			O	BOX	DCY503CPQ NA6SSS SWM3-A 1.464	
		802	LG3890R-H790M			O	BOX	DCY503CPQ NA3GSS SW3-A 1.285 1	
		803	LG3920R-E050A			O	PACKING,CASING	DC590 0.02 80 EPE 4 714 1428	
		804	LG292-053B		O	O	BAG	SOFT(MIDI)	NSP
		806	LG6850R-CAA26		O	O	CABLE,COAXIAL	1200M/M PAL-PAL DOUBLE SHIELD	
		808	LG534-008C		O	O	BATTERY,MANGANESE	AAAM(R03) SEOTONG 1-5 V - 1PA	NSP
		810	LG6851RP0003B		O	O	CABLE ASSY,RF	CABLE ASSY,RF/SCART/RCA USING	
		811	LG6611R1G001A		O	O	PLUG ASSY	1WAY YELLOW GLOBAL	
		812	LG6611R2G001A		O	O	PLUG ASSY	2WAY RED/WHITE GLOBAL	
REMOTE CONTROL SECTION									
		900	LG6711R1N077C		O		REMOTE CONTROLLER ASSEMBLY	N6 DCY503CIQ NA4USS W/VIDEO PL	
		900	LG6711R1N077D			O	REMOTE CONTROLLER ASSEMBLY	N6 DCY503CPQ NA6SSS W/SHOWVIEW	

Electrical Section

RUN DATE:14.MAY.2002

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
DVD SECTION									
PWB ASSEMBLY (A46A)									
CAPACITOR									
		C201	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C202	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C203	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C204	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C205	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C206	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C207	LG0CH1105D942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	1UF 10V Z Y5V(F) 1508 R/TP	
		C208	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C209	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C210	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C211	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C212	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C213	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C214	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C215	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C216	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C224	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C225	LG0CH1105D942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	1UF 10V Z Y5V(F) 1508 R/TP	
		C226	LG0CH1105D942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	1UF 10V Z Y5V(F) 1508 R/TP	
		C229	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C230	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C231	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C232	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C238	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C239	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C240	LG0CH1222K562	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	2200PF 50V K X7R(X) 1608 R/TP	
		C242	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C245	LG0CH1105D942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	1UF 10V Z Y5V(F) 1508 R/TP	
		C251	LG0CH1105D942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	1UF 10V Z Y5V(F) 1508 R/TP	
		C252	LG0CH4100K112	O	O	O	CHIP CAPA CERAMIC M/L T.C F/S	10P 50V D COG 1.6X0.8 R/TP	
		C253	LG0CH1105D942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	1UF 10V Z Y5V(F) 1508 R/TP	
		C254	LG0CH1105D942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	1UF 10V Z Y5V(F) 1508 R/TP	
		C255	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C258	LG0CH1105D942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	1UF 10V Z Y5V(F) 1508 R/TP	
		C261	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C262	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C263	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C264	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C265	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C272	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C273	LG0CH1225F944	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
		C274	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C278	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C279	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C280	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C281	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C284	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C285	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C286	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C287	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C288	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C290	LG0CH4180K412	O	O	O	CAPACITOR,CHIP CERAMIC M/L TC	18P 50V J COG 1.6X0.8 R/TP	
		C291	LG0CH4180K412	O	O	O	CAPACITOR,CHIP CERAMIC M/L TC	18P 50V J COG 1.6X0.8 R/TP	
		C292	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C293	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C294	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C295	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C296	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
		C2A0	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS	
			C2A3	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2A4	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C2A5	LG0CH11683F942	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	0.068UF 16V 80%,-20% Y5V(F) 16	
			C2A6	LG0CH1102K562	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	1000PF 50V 10% X7R(X) 1608 R/T	
			C2A7	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2A8	LG0CH1152K562	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	1500PF 50V 10% X7R(X) 1608 R/T	
			C2A9	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2B3	LG0CH1392K562	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	3900PF 50V K Z5U(E) 1608 R/TP	
			C2B4	LG0CH11683F942	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	0.068UF 16V 80%,-20% Y5V(F) 16	
			C2B5	LG0CH1333K562	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.033UF 50V K X7R(X) 1508 R/TP	
			C2B9	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2C1	LG0CH1103K562	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	0.01UF 50V 10% X7R(X) 1608 R/T	
			C2C2	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C2C4	LG0CH1102K562	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	1000PF 50V 10% X7R(X) 1608 R/T	
			C2C5	LG0CH1332K562	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	3300P 50V K X7R 1.6X0.8 R/TP	
			C2C6	LG0CH1102K562	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	1000PF 50V 10% X7R(X) 1608 R/T	
			C2C8	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2C9	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C2D0	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C2D1	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C2D2	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2D3	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2D4	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C2D5	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C2D6	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2D7	LG0CH1152K562	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	1500PF 50V 10% X7R(X) 1608 R/T	
			C2D9	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2M1	LG0CE1074F638	O	O	O	CAPACITOR,ELECTROLYTIC	100U SRA 16V M FM5 TP(5)	
			C2M2	LG0CH1682K562	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	6800P 50V K X7R 1.6X0.8 R/TP	
			C2M3	LG0CH1472K562	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	4700PF 50V K X7R(X) 1608 R/TP	
			C2M4	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2M5	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2M6	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2M7	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2M8	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2M9	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2N1	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C2N3	LG0CH1223K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.022UF 50V Z Y5V(F) 1508 R/TP	
			C2N4	LG0CH1225F944	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
			C301	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C302	LG0CH1225F944	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
			C303	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C304	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C305	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C306	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C307	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C308	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C309	LG0CH1225F944	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
			C314	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C316	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C317	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C318	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C319	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C320	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C3F1	LG0CH1225F944	O	O	O	CAPACITOR,FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
			C3F2	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C401	LG0CE2264F638	O	O	O	CAPACITOR,ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C402	LG0CE2264F638	O	O	O	CAPACITOR,ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C403	LG0CE2264F638	O	O	O	CAPACITOR,ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C404	LG0CE2264F638	O	O	O	CAPACITOR,ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C405	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C406	LG0CH1104K942	O	O	O	CAPACITOR,CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C408	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C409	LG0CE2274C638	O	O	O	CAPACITOR,ELECTROLYTIC	220M SRA 6.3V M FM5 TP(5)	
			C410	LG0CH4271K412	O	O	O	CAPACITOR,FIXED CERAMIC(High d	270PF 50V 5% NP0 1608 R/TP	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS	
			C411	LG0CH1102K512	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	1000PF 50V 10% B(5YP) 1608 R/T	
			C412	LG0CH4271K412	O	O	O	CAPACITOR, FIXED CERAMIC(High d	270PF 50V 5% NP0 1608 R/TP	
			C413	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C414	LG0CH1104K942	O	O	O	CAPACITOR, CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C415	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C416	LG0CH1102K512	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	1000PF 50V 10% B(5YP) 1608 R/T	
			C417	LG0CH4271K412	O	O	O	CAPACITOR, FIXED CERAMIC(High d	270PF 50V 5% NP0 1608 R/TP	
			C418	LG0CH1392K562	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	3900PF 50V K Z5U(E) 1608 R/TP	
			C419	LG0CE2264F638	O	O	O	CAPACITOR, ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C420	LG0CH1392K562	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	3900PF 50V K Z5U(E) 1608 R/TP	
			C421	LG0CE2264F638	O	O	O	CAPACITOR, ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C422	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C423	LG0CH4271K412	O	O	O	CAPACITOR, FIXED CERAMIC(High d	270PF 50V 5% NP0 1608 R/TP	
			C424	LG0CH1104K942	O	O	O	CAPACITOR, CHIP CERAMIC M/L HD	0.1UF 50V Z Y5V(F) 1508 R/TP	
			C501	LG0CE4764F638	O	O	O	CAPACITOR, ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C503	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C504	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C506	LG0CH1225F944	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
			C507	LG0CE4764F638	O	O	O	CAPACITOR, ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C508	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C509	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C510	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C511	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C512	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C513	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C514	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C515	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C516	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C517	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C518	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C519	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C520	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C521	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C522	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C523	LG0CH1225F944	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
			C525	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C526	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C527	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C528	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C529	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C530	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C531	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C532	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C533	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C534	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C535	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C536	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C538	LG0CH1225F944	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
			C540	LG0CH4220K412	O	O	O	CAPA, CHIP CERAMIC M/L T.C F/S	22P 50V J COG 1.6X0.8 R/TP	
			C541	LG0CH4270K412	O	O	O	CAPACITOR, CHIP CERAMIC M/L TC	27PF 50V J NP0 1608 R/TP	
			C542	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C543	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C544	LG0CH1225F944	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	2.2UF 16V 80%,-20% Y5V(F) 3216	
			C546	LG0CH4221K412	O	O	O	CAPACITOR, CHIP CERAMIC M/L TC	220P 50V J COG 1.6X0.8 R/TP	
			C549	LG0CH4221K412	O	O	O	CAPACITOR, CHIP CERAMIC M/L TC	220P 50V J COG 1.6X0.8 R/TP	
			C550	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C553	LG0CH4221K412	O	O	O	CAPACITOR, CHIP CERAMIC M/L TC	220P 50V J COG 1.6X0.8 R/TP	
			C554	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C555	LG0CH4101K412	O	O	O	CHIP CAPA CERAMIC M/L T.C F/S	100P 50V J COG 1.6X0.8 R/TP	
			C556	LG0CH4101K412	O	O	O	CHIP CAPA CERAMIC M/L T.C F/S	100P 50V J COG 1.6X0.8 R/TP	
			C557	LG0CH4270K412	O	O	O	CAPACITOR, CHIP CERAMIC M/L TC	27PF 50V J NP0 1608 R/TP	
			C558	LG0CH1104F942	O	O	O	CAPACITOR, FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C601	LG0CE1074F638	O	O	O	CAPACITOR, ELECTROLYTIC	100U SRA 16V M FM5 TP(5)	
			C602	LG0CE2264F638	O	O	O	CAPACITOR, ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C603	LG0CE1074F638	O	O	O	CAPACITOR, ELECTROLYTIC	100U SRA 16V M FM5 TP(5)	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
			C604				CAPACITOR,ELECTROLYTIC	100U SRA 16V M FM5 TP(5)	
			C605				CAPACITOR,ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C606				CAPACITOR,FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C607				CAPACITOR,ELECTROLYTIC	100U SRA 16V M FM5 TP(5)	
			C608				CAPACITOR,ELECTROLYTIC	100U SRA 16V M FM5 TP(5)	
			C609				CAPACITOR,FIXED CERAMIC(Temp.c	0.01UF 50V 10% X7R(X) 1608 R/T	
			C610				CAPACITOR,FIXED CERAMIC(Temp.c	0.1UF 16V 80%,-20% Y5V(F) 1608	
			C613				CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C614				CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C615				CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C663				CAPACITOR,ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			D2A1				DIODE,SWITCHING	DAN202K TP ROHM KOREA SOT23 80	
			D2A2				DIODE,SWITCHING	DAN202K TP ROHM KOREA SOT23 80	
			D2A3				DIODE,SWITCHING	DAN202K TP ROHM KOREA SOT23 80	
			D603				DIODE,SWITCHING	DAN202K TP ROHM KOREA SOT23 80	
			D604				DIODE,SWITCHING	DAN202K TP ROHM KOREA SOT23 80	
			F602				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			F603				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			F604				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			F605				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			F606				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			F607				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			F608				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			F609				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			F610				FILTER(CIRC),EMC	CFI06B1H101MF SAMHWA TP 2-5K	
			IC201				IC.LINEAR	HDC25D811B HYUNDAI 208 QFP TRA	
			IC203				IC,ELITE MEMORY TECHNOLOGY	M12L16161A-7T 50P TSOP ST 16M(
			IC206				IC,TOSHIBA	TC7W04FU	
			IC2A1				IC.LINEAR	HD153702TF HITACHI 64 TQFP TRA	
			IC2A2				IC,JRC	NJM3414AM-TE1,3K/REEL. JRC	
			IC2A4				IC,KEC	KIA393F-EL FLP-8 TP DUAL COMPA	
			IC301				IC,XILINX	XC9572XL-10TQ100C 100 QFP TRAY	
			IC305				IC,MEMORIES	HY57643220CT-7I HYUNDAI 86P TS	
			IC401				IC,PERIPHERALS	CS4391-KZR CIRRUS LOGIC 20 TSS	
			IC402				IC,JRC	NJM4580M 8,DMP8 TP OP AMP 2K/R	
			IC501				IC,NATIONAL SEMICONDUCTOR	NDV8602 240 VQFP BK MICOM+MPEG	
			IC502				IC,MEMORIES	AT93C56-10SC(SI)-2.7-8S1 ATMEL	
			IC503				IC,FAIRCHILD	MM74HCT244SJ 20P SOIC TP 3-STA	
			IC506				IC,POWER MANAGEMENT	BA18BC0FP-E2 ROHM 3P TO252-3 R	
			IC601				IC,PERIPHERALS	MM1510XNRE MITSUMI 6,SOT-26A R	
			IC602				IC,PERIPHERALS	MM1566AFBE MITSUMI 16 SOP R/TP	
			JK601				JACK,RCA	RCA-1302A-7G YUQIU COMBO SCART	
			L201				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L203				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L206				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L207				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L2A1				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L2A2				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L301				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L302				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L3F1				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L502				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L503				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L504				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			L505				FILTER(CIRC),EMC	HB-1M2012-102JT CERATECH TP	
			Q2A1				TRANSISTOR	2SA1037K-Q CHIP ROHM-J	
			Q2A2				TRANSISTOR	2SA1037K-Q CHIP ROHM-J	
			Q2A5				TRANSISTOR,BIPOLARS	CHIP KTC3882 SOT-23 TP KEC - -	
			Q2A6				TRANSISTOR,BIPOLARS	CHIP KTC3882 SOT-23 TP KEC - -	
			Q2M1				TRANSISTOR	DTC124EK TP ROHM KOREA SOT23 3	
			Q605				TRANSISTOR	KRA103S-T1(PC)22-22 CHIP KEC	
			Q606				TRANSISTOR	KRA103S-T1(PC)22-22 CHIP KEC	
			Q607				TRANSISTOR	CHIP KTC3875S-GR-T1(ALG) KEC	
			Q608				TRANSISTOR	CHIP KTC3875S-GR-T1(ALG) KEC	
			Q615				TRANSISTOR	2SA1037K-Q CHIP ROHM-J	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS	
			R3F3	LG0RH0000C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	0 OHM 1 / 16 W 1608 5.00% D	
			R3F4	LG0RH1002C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	10K OHM 1 / 16 W 1608 5.00% D	
			R3F5	LG0RH1002C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	10K OHM 1 / 16 W 1608 5.00% D	
			R401	LG0RH0182C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	18 OHM 1 / 16 W 1608 5.00% D	
			R403	LG0RH0102C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	10 OHM 1 / 16 W 1608 5.00% D	
			R404	LG0RH7501C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	7.5K OHM 1 / 16 W 1608 5.00% D	
			R405	LG0RH1801C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.8K OHM 1 / 16 W 1608 5.00% D	
			R406	LG0RH1801C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.8K OHM 1 / 16 W 1608 5.00% D	
			R407	LG0RH1002C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	10K OHM 1 / 16 W 1608 5.00% D	
			R409	LG0RH7501C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	7.5K OHM 1 / 16 W 1608 5.00% D	
			R410	LG0RH7501C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	7.5K OHM 1 / 16 W 1608 5.00% D	
			R411	LG0RH7501C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	7.5K OHM 1 / 16 W 1608 5.00% D	
			R412	LG0RH1801C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.8K OHM 1 / 16 W 1608 5.00% D	
			R413	LG0RH8201C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	8.2K OHM 1 / 16 W 1608 5.00% D	
			R414	LG0RH5601C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	5.6K OHM 1 / 16 W 1608 5.00% D	
			R415	LG0RH4701C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	4.7K OHM 1 / 16 W 1608 5.00% D	
			R416	LG0RH8201C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	8.2K OHM 1 / 16 W 1608 5.00% D	
			R417	LG0RH1801C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.8K OHM 1 / 16 W 1608 5.00% D	
			R418	LG0RH1002C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	10K OHM 1 / 16 W 1608 5.00% D	
			R419	LG0RH3300C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	330 OHM 1 / 16 W 1608 5.00% D	
			R420	LG0RH3300C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	330 OHM 1 / 16 W 1608 5.00% D	
			R428	LG0RH0000C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	0 OHM 1 / 16 W 1608 5.00% D	
			R429	LG0RH0000C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	0 OHM 1 / 16 W 1608 5.00% D	
			R430	LG0RH0000C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	0 OHM 1 / 16 W 1608 5.00% D	
			R431	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
			R432	LG0RH0000C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	0 OHM 1 / 16 W 1608 5.00% D	
			R433	LG0RH5600C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	560 OHM 1 / 16 W 1608 5.00% D	
			R434	LG0RH5600C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	560 OHM 1 / 16 W 1608 5.00% D	
			R435	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
			R436	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
			R501	LG0RH3301C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	3.3K OHM 1 / 16 W 1608 5.00% D	
			R503	LG0RH0000C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	0 OHM 1 / 16 W 1608 5.00% D	
			R504	LG0RH1000C422	O	O	O	RESISTOR,METAL GLAZED(CHIP)	100 OHM 1 / 16 W 1608 1.00% D	
			R505	LG0RH0102C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	10 OHM 1 / 16 W 1608 5.00% D	
			R506	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
			R507	LG0RH1100C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	110 OHM 1 / 16 W 1608 5.00% D	
			R508	LG0RH0752C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	75 OHM 1 / 16 W 1608 5.00% D	
			R509	LG0RH1100C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	110 OHM 1 / 16 W 1608 5.00% D	
			R510	LG0RH0222C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	22 OHM 1 / 16 W 1608 5.00% D	
			R514	LG0RH0222C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	22 OHM 1 / 16 W 1608 5.00% D	
			R515	LG0RH0222C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	22 OHM 1 / 16 W 1608 5.00% D	
			R516	LG0RH1000C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	100 OHM 1 / 16 W 1608 5.00% D	
			R517	LG0RH0222C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	22 OHM 1 / 16 W 1608 5.00% D	
			R518	LG0RH0222C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	22 OHM 1 / 16 W 1608 5.00% D	
			R519	LG0RH0222C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	22 OHM 1 / 16 W 1608 5.00% D	
			R520	LG0RH0222C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	22 OHM 1 / 16 W 1608 5.00% D	
			R521	LG0RH4701C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	4.7K OHM 1 / 16 W 1608 5.00% D	
			R522	LG0RH1002C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	10K OHM 1 / 16 W 1608 5.00% D	
			R523	LG0RH4701C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	4.7K OHM 1 / 16 W 1608 5.00% D	
			R524	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
			R525	LG0RH0222C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	22 OHM 1 / 16 W 1608 5.00% D	
			R530	LG0RH1201C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.2K OHM 1 / 16 W 1608 5.00% D	
			R531	LG0RH1201C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.2K OHM 1 / 16 W 1608 5.00% D	
			R532	LG0RH1201C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.2K OHM 1 / 16 W 1608 5.00% D	
			R533	LG0RH1201C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.2K OHM 1 / 16 W 1608 5.00% D	
			R534	LG0RH6800C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	680 OHM 1 / 16 W 1608 5.00% D	
			R535	LG0RH1201C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1.2K OHM 1 / 16 W 1608 5.00% D	
			R541	LG0RH1002C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	10K OHM 1 / 16 W 1608 5.00% D	
			R588	LG0RJ0372C477	O	O	O	RESISTOR,METAL GLAZED(CHIP)	37.4 OHM 1/16 W 1% 1608 R/TP	
			R589	LG0RJ0372C477	O	O	O	RESISTOR,METAL GLAZED(CHIP)	37.4 OHM 1/16 W 1% 1608 R/TP	
			R590	LG0RJ0372C477	O	O	O	RESISTOR,METAL GLAZED(CHIP)	37.4 OHM 1/16 W 1% 1608 R/TP	
			R591	LG0RJ0372C477	O	O	O	RESISTOR,METAL GLAZED(CHIP)	37.4 OHM 1/16 W 1% 1608 R/TP	
			R597	LG0RH0000C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	0 OHM 1 / 16 W 1608 5.00% D	
			R604	LG0RH0752C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	75 OHM 1 / 16 W 1608 5.00% D	
			R605	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
		R606	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
		R607	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
		R608	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
		R609	LG0RH1001C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	1K OHM 1 / 16 W 1608 5.00% D	
		R618	LG0RH1003C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	100K OHM 1 / 16 W 1608 5.00% D	
		R619	LG0RH1003C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	100K OHM 1 / 16 W 1608 5.00% D	
		R620	LG0RH2200C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	220 OHM 1 / 16 W 1608 5.00% D	
		R621	LG0RH2200C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	220 OHM 1 / 16 W 1608 5.00% D	
		R625	LG0RH0752C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	75 OHM 1 / 16 W 1608 5.00% D	
		R626	LG0RH0752C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	75 OHM 1 / 16 W 1608 5.00% D	
		R627	LG0RH0752C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	75 OHM 1 / 16 W 1608 5.00% D	
		R628	LG0RH5601C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	5.6K OHM 1 / 16 W 1608 5.00% D	
		R629	LG0RH5601C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	5.6K OHM 1 / 16 W 1608 5.00% D	
		R652	LG0RH4700C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	470 OHM 1 / 16 W 1608 5.00% D	
		R653	LG0RH4700C622	O	O	O	RESISTOR,METAL GLAZED(CHIP)	470 OHM 1 / 16 W 1608 5.00% D	
		X201	LG6202R-BM04C	O	O	O	RESONATOR,CRYSTAL	HC-49/S BUBANG 33-8688MHZ 5	
VCR SECTION									
BOARD ASSEMBLY (A46)									
		BC91	LG636-004C	O	O	O	COIL	BEAD CORE BFS3550R2FD8,R T/P	
		BC92	LG636-004C	O	O	O	COIL	BEAD CORE BFS3550R2FD8,R T/P	
		BD02	LG636-004C	O	O	O	COIL	BEAD CORE BFS3550R2FD8,R T/P	
		BD101	LG0DD16000DA	O	O	O	DIODE	S1WBA60(1A 600V) SHIDENKEN	
		C103	LG624-082C	O	O	O	CAPACITOR,AL.ELECTROLYTIC	100MF/400V SHL SMPS S/Y	
		C105	LG0CQ1031Y519	O	O	O	CAPACITOR,POLYESTER	0.01UF D 630V K PE NI TP	
		C107	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C108	LG0CE336BH638	O	O	O	CAPACITOR,ELECTROLYTIC	33UF KME 25V M FM5 TP5	
		C109	LG0CN223AK948	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 50V Z F TA26 S	
△		C110	LG0CG2210U610	O	O	O	CAPACITOR,SEMI CERAMIC	220 PF 400V M B R(NK,AD,SD)	
△		C111	LG0CG3320U630	O	O	O	CAPACITOR,SEMI CERAMIC	3300 PF 400V M E R(NK,AD,SD)	
		C121	LG0CE2276F638	O	O	O	CAPACITOR,ELECTROLYTIC	220U SMS 16V M FM5 TP(5)	
		C122	LG624-085D	O	O	O	CAPACITOR	CE 47UF/50V KME (SMPS)	
		C123	LG0CE477BH630	O	O	O	CAPACITOR,AL.ELECTROLYTIC	470UF KME TYPE 25V M FM5 BULK	
		C126	LG0CE2276H638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	220UF SMS,SG 25V 20% FM5 TP 5	
		C127	LG0CE108BF630	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	1000UF KME 16V M FM5 BULK	
		C128	LG0CE3376D638	O	O	O	CAPACITOR,ELECTROLYTIC	330UF SMS 10V M FM5 TP5	
		C129	LG0CE228BF630	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	2200UF KME TYPE 16V 20% FM5 BU	
		C130	LG624-085D	O	O	O	CAPACITOR	CE 47UF/50V KME (SMPS)	
		C131	LG624-082H	O	O	O	CAPACITOR	CE 1000UF/10V SHL(10*12.5)T/P	
		C132	LG624-085D	O	O	O	CAPACITOR	CE 47UF/50V KME (SMPS)	
		C133	LG0CQ1042K409	O	O	O	CAPACITOR,FIXED FILM	0.1UF S 50V J PE TP	
		C151	LG0CE4754K638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	4.7UF SRA,SS 50V 20% FM5 TP 5	
		C152	LG0CE4754K638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	4.7UF SRA,SS 50V 20% FM5 TP 5	
		C153	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C154	LG0CE1074F638	O	O	O	CAPACITOR,ELECTROLYTIC	100U SRA 16V M FM5 TP(5)	
		C155	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C156	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C158	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C159	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C161	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C162	LG0CE4754K638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	4.7UF SRA,SS 50V 20% FM5 TP 5	
		C163	LG624-087H	O	O	O	CAPACITOR	HIGH-VOL 220PF/1KV CERAMIC	
		C302	LG0CE2264F638	O	O	O	CAPACITOR,ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
		C303	LG0CN1220F668	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1200P 16V M X TA26	
		C304	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C305	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C306	LG0CN1220F668	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1200P 16V M X TA26	
		C307	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C308	LG0CQ1532K409	O	O	O	CAPACITOR,FIXED FILM	0.015UF S 50V J PE TP	
		C309	LG0CN2210K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	220P 50V K B TA26	
		C310	LG0CQ1032K409	O	O	O	CAPACITOR,POLYESTER(MYLAR)	0.01UF S 50V J PE TP	
		C311	LG0CE4765K618	O	O	O	CAPACITOR,AL.ELECTROLYTIC	47UF SR,SV 50V M FL TP 5	
		C312	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C313	LG0CQ2232L559	O	O	O	CAPACITOR,POLYESTER	0.022UF S 63V K PP NI TP5	
		C314	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS	
			C315	LG0CE2253K636	O	O	O	CAPACITOR, FIXED ELECTROLYTIC	2.2UF SRE, SE 50V 20% FM5 BP(D)	
			C316	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C317	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C318	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C319	LG0CQ1032K409	O	O	O	CAPACITOR, POLYESTER(MYLAR)	0.01UF S 50V J PE TP	
			C320	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C321	LG0CX6800K408	O	O	O	CAPACITOR TUBULA(T.C)	68P 50V J SL TA26	
			C322	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C323	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C324	LG0CE4754K638	O	O	O	CAPACITOR, FIXED ELECTROLYTIC	4.7UF SRA, SS 50V 20% FM5 TP 5	
			C325	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C326	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C327	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C328	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C329	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C330	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C331	LG0CE2264F638	O	O	O	CAPACITOR, ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
			C333	LG0CE4764F638	O	O	O	CAPACITOR, ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C334	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C335	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C336	LG0CE4764F638	O	O	O	CAPACITOR, ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C337	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C338	LG0CN4730K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.047UF D 50V 80%,-20% F(Y5V)	
			C339	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C340	LG0CN4730K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.047UF D 50V 80%,-20% F(Y5V)	
			C341	LG0CN223AK948	O	O	O	CAPACITOR, TUBULAR(HIGH DIELE)	0.022UF 50V Z F TA26 S	
			C342	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C343	LG0CN4730K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.047UF D 50V 80%,-20% F(Y5V)	
			C345	LG0CN4730K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.047UF D 50V 80%,-20% F(Y5V)	
			C346	LG0CE4764F638	O	O	O	CAPACITOR, ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C347	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C348	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C349	LG0CE4764F638	O	O	O	CAPACITOR, ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C350	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C351	LG0CN2210K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	220P 50V K B TA26	
			C353	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C355	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C356	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C357	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C358	LG0CX6800K408	O	O	O	CAPACITOR TUBULA(T.C)	68P 50V J SL TA26	
			C359	LG0CE1054K638	O	O	O	CAPACITOR, ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C361	LG0CN223AK948	O	O	O	CAPACITOR, TUBULAR(HIGH DIELE)	0.022UF 50V Z F TA26 S	
			C362	LG0CE1064F638	O	O	O	CAPACITOR, ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
			C363	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C366	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C367	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C368	LG0CQ8224K409	O	O	O	CAPACITOR, FIXED FILM	0.0082UF TE 50V 5% PE TP5	
			C369	LG0CN1010K518	O	O	O	CAPACITOR, TUBULAR(HIGH DIELE)	100P 50V K B TA26	
			C370	LG0CN8200K418	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	82P 50V J B TA26	
			C371	LG0CN8200K418	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	82P 50V J B TA26	
			C372	LG0CN8200K418	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	82P 50V J B TA26	
			C374	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C375	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C376	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C377	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C500	LG0CE4775C638	O	O	O	CAPACITOR, FIXED ELECTROLYTIC	470UF SR, SV 6.3V 20% FM5 TP 5	
			C501	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C502	LG0CE4764F638	O	O	O	CAPACITOR, ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C503	LG0CE2274C638	O	O	O	CAPACITOR, ELECTROLYTIC	220M SRA 6.3V M FM5 TP(5)	
			C504	LG0CE2274C638	O	O	O	CAPACITOR, ELECTROLYTIC	220M SRA 6.3V M FM5 TP(5)	
			C505	LG0CE4764F638	O	O	O	CAPACITOR, ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C506	LG0CN223AK948	O	O	O	CAPACITOR, TUBULAR(HIGH DIELE)	0.022UF 50V Z F TA26 S	
			C509	LG0CC2200K415	O	O	O	CAPACITOR, CERAMIC(TEMP COMP)	22P 50V J NP0 TS	
			C511	LG0CN1040K948	O	O	O	CAPACITOR, FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C512	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS	
			C513	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			C514	LG0CC1200K415	O	O	O	CAPACITOR,CERAMIC(TEMP COMP)	12P 50V J NP0 TS	
			C515	LG0CC1500K415	O	O	O	CAPACITOR,CERAMIC(TEMP COMP)	15P 50V J NP0 TS	
			C516	LG0CN223AK948	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 50V Z F TA26 S	
			C518	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C519	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C523	LG0CE2254K638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	2.2UF SRA,SS 50V 20% FM5 TP 5	
			C524	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C525	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C526	LG0CE4764J638	O	O	O	CAPACITOR,AL.ELECTROLYTIC	47UF SRA,SS 35V M FM5 TP 5	
			C527	LG0CN2210K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	220P 50V K B TA26	
			C533	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			C535	LG0CE4754K638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	4.7UF SRA,SS 50V 20% FM5 TP 5	
			C543	LG0CN2220F668	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	2200P 16V M X TA26	
			C544	LG0CN4730K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.047UF D 50V 80%,-20% F(Y5V)	
			C545	LG0CN3330K518	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.033UF 50V K B TA26	
			C546	LG0CE4764F638	O	O	O	CAPACITOR,AL.ELECTROLYTIC	47UF SRA,SS 35V M FM5 TP 5	
			C547	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C551	LG0CN3330K518	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.033UF 50V K B TA26	
			C552	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C561	LG0CE2274C638	O	O	O	CAPACITOR,ELECTROLYTIC	220M SRA 6.3V M FM5 TP(5)	
			C564	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			C567	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			C570	LG0CC1500K415	O	O	O	CAPACITOR,CERAMIC(TEMP COMP)	15P 50V J NP0 TS	
			C571	LG0CC1500K415	O	O	O	CAPACITOR,CERAMIC(TEMP COMP)	15P 50V J NP0 TS	
			C575	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			C576	LG0CC2700K415	O	O	O	CAPACITOR CERAMIC(TEMP COMP)	27P 50V J NP0 TP	
			C577	LG0CN223AK948	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 50V Z F TA26 S	
			C578	LG0CN2220F668	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	2200P 16V M X TA26	
			C581	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C582	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C583	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C595	LG0CN223AK948	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 50V Z F TA26 S	
			C596	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C5A3	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C5A4	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C5A5	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
			C5K1	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
			C5P1	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C5P2	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C5R2	LG0CN6810K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	680P 50V K B TA26	
			C5S1	LG0CX4300K408	O	O	O	CAPACITOR TUBULA(T.C)	43P 50V J SL TA26	
			C5S3	LG0CN223AK948	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 50V Z F TA26 S	
			C703	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C704	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C706	LG0CX3300K408	O	O	O	CAPACITOR TUBULA(T.C)	33P 50V J SL TA26	
			C707	LG0CX6800K408	O	O	O	CAPACITOR TUBULA(T.C)	68P 50V J SL TA26	
			C708	LG0CE4775C618	O	O	O	CAPACITOR,AL.ELECTROLYTIC	470UF SR,SV 6.3V M FL TP 5	
			C709	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C710	LG0CE4754K638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	4.7UF SRA,SS 50V 20% FM5 TP 5	
			C712	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C713	LG0CX5600K408	O	O	O	CAPACITOR,TUBULAR(T.C)	56P 50V J SL TA26	
			C714	LG0CX5600K408	O	O	O	CAPACITOR,TUBULAR(T.C)	56P 50V J SL TA26	
			C715	LG0CC0500K015	O	O	O	CAPACITOR,CERAMIC(TEMP COMP)	5P 50V C NP0 TR	
			C716	LG0CC1000K015	O	O	O	CAPACITOR,CERAMIC(TEMP COMP)	10P 50V C NP0 TS	
			C717	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C718	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C719	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C720	LG0CN1520F668	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	1500P 16V M X TA26	
			C721	LG0CN1520F668	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	1500P 16V M X TA26	
			C722	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C723	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C726	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
			C727	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
			C729	LG0CE3354K638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	3.3UF SRA,SS 50V 20% FM5 TP 5	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
		C731	LG0CX5R60K508	O	O	O	CAPACITOR TUBULA(T.C)	5.6PF 50V K SL TA26	
		C732	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C751	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C752	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C7M3	LG0CX2700K408	O	O	O	CAPACITOR TUBULA(T.C)	27P 50V J SL TA26	
		C7M6	LG0CX2700K408	O	O	O	CAPACITOR TUBULA(T.C)	27P 50V J SL TA26	
		C7V1	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C7V2	LG0CN223AK948	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 50V Z F TA26 S	
		C7V3	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C7V4	LG0CN4730K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.047UF D 50V 80%,-20% F(Y5V)	
		C7V5	LG0CN4730K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.047UF D 50V 80%,-20% F(Y5V)	
		C802	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C803	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C804	LG0CE1044K638	O	O	O	CAPACITOR,ELECTROLYTIC	0.1M SRA 50V M FM5 TP(5)	
		C805	LG0CE1044K638	O	O	O	CAPACITOR,ELECTROLYTIC	0.1M SRA 50V M FM5 TP(5)	
		C806	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C807	LG0CE4744K638	O	O	O	CAPACITOR,ELECTROLYTIC	0.47M SRA 50V M FM5 TP(5)	
		C808	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C809	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C810	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C811	LG0CE4754K638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	4.7UF SRA,SS 50V 20% FM5 TP 5	
		C812	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C813	LG0CN6820F668	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	6800P 16V M X TA26	
		C814	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C815	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C816	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C817	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C818	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C819	LG0CN6820F668	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	6800P 16V M X TA26	
		C820	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C821	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C822	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C823	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C824	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C825	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C826	LG0CN1030F678	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C828	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C829	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C834	LG0CE4775C638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	470UF SR,SV 6.3V 20% FM5 TP 5	
		C842	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C850	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C852	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C854	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C855	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C856	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C857	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C859	LG0CE2264F638	O	O	O	CAPACITOR,ELECTROLYTIC	22M SRA 16V M FM5 TP(5)	
		C860	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C861	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C863	LG0CE4764F638	O	O	O	CAPACITOR,ELECTROLYTIC	47M SRA/SS 16V M FM5 TP(5)	
		C864	LG0CE1054K638	O	O	O	CAPACITOR,ELECTROLYTIC	1.0M SRA/SS50V M FM5 TP(5)	
		C869	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C870	LG0CE1044K638	O	O	O	CAPACITOR,ELECTROLYTIC	0.1M SRA 50V M FM5 TP(5)	
		C871	LG0CE1044K638	O	O	O	CAPACITOR,ELECTROLYTIC	0.1M SRA 50V M FM5 TP(5)	
		C884	LG0CE1044K638	O	O	O	CAPACITOR,ELECTROLYTIC	0.1M SRA 50V M FM5 TP(5)	
		C885	LG0CE1044K638	O	O	O	CAPACITOR,ELECTROLYTIC	0.1M SRA 50V M FM5 TP(5)	
		C886	LG0CE4775C638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	470UF SR,SV 6.3V 20% FM5 TP 5	
		C887	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C888	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C889	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C890	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C901	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C911	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C912	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C915	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
			C916	LG0CN1020K518	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			C921	LG0CN1020K518	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			C924	LG0CN1020K518	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			C925	LG0CN1020K518	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
			CS501	LG6600M000002	O	O	SWITCH,PUSH	MPU11810MLB0 MIC DC 5V 1MA D-3	
			D101	LG0DD221009AA	O	O	DIODE,RECTIFIERS	ERA22-10 KFLB,TP_R T/P,FUJI	
			D102	LG0DD010009AC	O	O	DIODE	EU01W(R-FORM) TP SANKEN	
			D107	LG0DD010009AC	O	O	DIODE	EU01W(R-FORM) TP SANKEN	
			D108	LG0DD010009AC	O	O	DIODE	EU01W(R-FORM) TP SANKEN	
			D110	LG0DR302000AB	O	O	DIODE,RECTIFIER	HER302 BK RECTRON DO201AD 100V	
			D111	LG0DR158220AA	O	O	DIODE,RECTIFIER	1N5822 BK RECTRON DO201AD 40V	
			D112	LG0DR104510AA	O	O	DIODE,RECTIFIERS	B10A45V1 BK KEC TO220 45V 10A	
			D113	LG0DD010009AC	O	O	DIODE	EU01W(R-FORM) TP SANKEN	
			D114	LG0DR104009AB	O	O	DIODE,RECTIFIER	RL104 R. TP GULF SEMICONDUCTOR	
			D115	LG0DR104009AB	O	O	DIODE,RECTIFIER	RL104 R. TP GULF SEMICONDUCTOR	
			D117	LG0DR104009AB	O	O	DIODE,RECTIFIER	RL104 R. TP GULF SEMICONDUCTOR	
			D121	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			D122	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			D301	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			D502	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			D509	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			D901	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			D902	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			D905	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			D906	LG0DD133009AA	O	O	DIODE,SWITCHING	1SS133 DETECT,SW TP	
			ES501	LG4931R-0050C	O	O	HOLDER ASSEMBLY	END (DI)	
			ES502	LG4931R-0050C	O	O	HOLDER ASSEMBLY	END (DI)	
△			F101	LG585-011T	O	O	FUSE,SLOW BLOW	1600MA 250 V 5.2X20 CY/GL SEMK	
			F102	LG633-032K	O	O	IC,ROHM	ICP-N20 T104 TP IC DETACT	
			FH01	LG586-008B	O	O	HOLDER	FUSE CLIP TP SINSUNG	
			FH02	LG586-008B	O	O	HOLDER	FUSE CLIP TP SINSUNG	
			FL301	LG633-032K	O	O	COIL,IFT	BIAC OSC,1CHIP 5V(KS-75M) KWAN	
△			IC101	LG0IPMGFF001A	O	O	IC,POWER MANAGEMENT	ICE2B265 INFINEON 8 DIP ST SMP	
			IC102	LG0IKE431000A	O	O	IC,KEC	KIA431 3 PIN TP	
			IC103	LG0IPMGKE006B	O	O	IC,POWER MANAGEMENT	KIA78R33PI CU KEC 4P TO-220IS	
			IC104	LG0IPMGKE006B	O	O	IC,POWER MANAGEMENT	KIA78R33PI CU KEC 4P TO-220IS	
△			IC105	LG657-063A	O	O	SENSOR	LTV-817B,PHOTO COUPLER(LITEON)	
			IC106	LG0IPMGKE009C	O	O	IC,POWER MANAGEMENT	KIA7808API-CU KEC 3P TO-220 ST	
			IC301	LG0ILNRSAA005A	O	O	IC,LINEAR	LA71750AM SANYO 100 QFP TRAY A	
			IC501	LG0IMCRHI018A	O	O	IC,MICRO CONTROLLER	HD6432197SA08F HITACHI 112P QF	
			IC503	LG0IAL241600B	O	O	IC,ATMEL	AT24C16 - - -	
			IC504	LG0IKE703100A	O	O	IC,KEC	KIA7031P 3P 3.1V RESET(TAPING)	
			IC505	LG0IKE704200B	O	O	IC,KEC	KIA7042P 3P 4.2V RESET(TAPING)	
			IC751	LG0IIT341700B	O	O	IC,ITT	MSP3417D-QG OFFP44 BK NICAM+A2	
			IC7V1	LG0ILNRMN001A	O	O	IC,LINEAR	SDA5650 MICRONAS 14 DIP ST VPS	
			IC801	LG0IPH960500A	O	O	IC,PHILIPS	TDA9605H QFP44 BK HIFI AMP+HIF	
			IC802	LG0IMT144300A	O	O	IC,MITSUMI	MM1443XJ SSOP-34 TP CANAL S/W	
△			L102	LG616-145G	O	O	FILTER(CIRC)	SHT LFSQ2215V4-04220	
			L122	LG633-088G	O	O	COIL,CHOKE	CHOCK(22MH) 5MM TOKO TP	
			L123	LG633-088G	O	O	COIL,CHOKE	CHOCK(22MH) 5MM TOKO TP	
			L124	LG633-088G	O	O	COIL,CHOKE	CHOCK(22MH) 5MM TOKO TP	
			L301	LG0LR0102J0N5	O	O	INDUCTOR,RADIAL LEAD	10UH 5% TP 3X5 TR5	
			L302	LG0LR1000K035	O	O	INDUCTOR RADIAL LEAD	100M K 6X6 L5 TP	
			L303	LG0LR0102J0N5	O	O	INDUCTOR,RADIAL LEAD	10UH 5% TP 3X5 TR5	
			L304	LG0LR0102J0N5	O	O	INDUCTOR,RADIAL LEAD	10UH 5% TP 3X5 TR5	
			L305	LG0LR1000K035	O	O	INDUCTOR RADIAL LEAD	100M K 6X6 L5 TP	
			L307	LG0LR0102J0N5	O	O	INDUCTOR,RADIAL LEAD	10UH 5% TP 3X5 TR5	
			L501	LG0LA0122K018	O	O	INDUCTOR AXIAL LEAD	12M K 2.3X3.4 L5 TP	
			L503	LG0LR1000K035	O	O	INDUCTOR RADIAL LEAD	100M K 6X6 L5 TP	
			L504	LG0LR0102J0N5	O	O	INDUCTOR,RADIAL LEAD	10UH 5% TP 3X5 TR5	
			L505	LG0LR1000K035	O	O	INDUCTOR RADIAL LEAD	100M K 6X6 L5 TP	
			L506	LG635-027C	O	O	INDUCTOR,RADIAL LEAD	EL0405RA SKI150G-3 K-TDK 15UH	
			L5S1	LG0LA0332K018	O	O	INDUCTOR AXIAL LEAD	33M K 2.3X3.4 L5 TP	
			L702	LG0LR1000K035	O	O	INDUCTOR RADIAL LEAD	100M K 6X6 L5 TP	
			L704	LG0LR0102J0N5	O	O	INDUCTOR,RADIAL LEAD	10UH 5% TP 3X5 TR5	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
			L705				INDUCTOR,RADIAL LEAD	10UH 5% TP 3X5 TR5	
			L706				INDUCTOR AXIAL LEAD	8.2M K 2.3X3.4 L5 TP	
			L707				INDUCTOR RADIAL LEAD	100M K 6X6 L5 TP	
			L751				INDUCTOR RADIAL LEAD	100M K 6X6 L5 TP	
			L7V1				INDUCTOR RADIAL LEAD	100M K 6X6 L5 TP	
			L801				INDUCTOR,RADIAL LEAD	100UH 5 4X5 TR5	
			L802				INDUCTOR,RADIAL LEAD	100UH 5 4X5 TR5	
			L803				INDUCTOR,RADIAL LEAD	100UH 5 4X5 TR5	
			L901				INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
			L902				INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
			L903				INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
			L904				INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
			L905				INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
			L906				INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
			L907				INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
			L910				INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
			LD501				HOLDER ASSY	LED(DI-CKD)LOCAL	
			MS501				SWITCH,MODE	NON 5V 1MA VERTICAL -G	
			P8D01				CONNECTOR (CIRC),FFC/FPC	00-8370-181-000-800 ELCO 18PIN	
			PBM00				PWB(PCB) ASSEMBLY,TOTAL	LG SANYO SCART CIQ	NSP
			PBM00				PWB(PCB) ASSEMBLY,TOTAL	COMBI SANYO SCART	NSP
			PM602				CONNECTOR	TUC-P05P-B1,TAIKO B-B 5PIN	
			Q112				TRANSISTOR	KTC3205-TP-Y (KTC2236A)KEC	
			Q113				TRANSISTOR	KTA1273-TP-Y (KTA966A)KEC	
			Q114				TRANSISTOR,BIPOLARS	KTA1268-BL TP KEC	
			Q115				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q116				TRANSISTOR	KTA1273-TP-Y (KTA966A)KEC	
			Q117				TRANSISTOR	KTC3205-TP-Y (KTC2236A)KEC	
			Q118				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q301				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q302				TRANSISTOR	2SA1980G TP AUK TO92	
			Q303				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q304				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q305				TRANSISTOR	2SA1980G TP AUK TO92	
			Q306				TRANSISTOR	2SC5344Y TP	
			Q308				TRANSISTOR	2SA1980G TP AUK TO92	
			Q309				TRANSISTOR	2SA1980G TP AUK TO92	
			Q501				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q502				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q503				TRANSISTOR	KTA1273-TP-Y (KTA966A)KEC	
			Q504				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q514				TRANSISTOR	SRC1203 TP AUK TO92 22K,22K	
			Q515				TRANSISTOR	SRC1203 TP AUK TO92 22K,22K	
			Q5S1				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q804				TRANSISTOR	2SA1980G TP AUK TO92	
			Q904				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q905				TRANSISTOR	2SC5343-L TP AUK TO92	
			Q906				TRANSISTOR	2SC5343-L TP AUK TO92	
			R100				RESISTOR,FIXED CARBON FILM	1.5M OHM 1/2 W 5.00% MF10	
			R101				RESISTOR	2.7/2W CEMENT SMPS V	
			R104				RESISTOR,FIXED METAL OXIDE FIL	56K OHM 2 W 5.00% TR	
			R105				RESISTOR,FIXED CARBON FILM	22 OHM 1/6 W 5.00% TA26	
			R106				RESISTOR,FIXED CARBON FILM	22 OHM 1/6 W 5.00% TA26	
			R107				RESISTOR,FIXED METAL OXIDE FIL	0.35 OHM 2 W 5.00% TR	
			R111				RESISTOR,FIXED CARBON FILM	100K OHM 1/6 W 5.00% TA26	
			R112				RESISTOR,FIXED CARBON FILM	220 OHM 1/6 W 5.00% TA26	
			R113				RESISTOR,FIXED CARBON FILM	2.2K OHM 1/6 W 5.00% TA26	
			R114				RESISTOR,FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R115				RESISTOR,FIXED METAL FILM	3.3K OHM 1/6 W 1.00% TA26	
			R116				RESISTOR,FIXED METAL FILM	2.7K OHM 1/6 W 1.00% TA26	
			R117				RESISTOR,FIXED CARBON FILM	270 OHM 1/6 W 5.00% TA26	
			R118				RESISTOR,FIXED CARBON FILM	100K OHM 1/6 W 5.00% TA26	
			R119				RESISTOR,FIXED CARBON FILM	100K OHM 1/6 W 5.00% TA26	
			R131				RESISTOR,FIXED CARBON FILM	220K OHM 1/6 W 5.00% TA26	
			R132				RESISTOR,FIXED CARBON FILM	220K OHM 1/6 W 5.00% TA26	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS	
			R153	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R154	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R155	LG0RD1802F608	O	O	O	RESISTOR, FIXED CARBON FILM	18K OHM 1/6 W 5.00% TA26	
			R156	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R157	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R158	LG0RD3300F608	O	O	O	RESISTOR, FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
			R159	LG0RD3300F608	O	O	O	RESISTOR, FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
			R160	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R161	LG0RD3300F608	O	O	O	RESISTOR, FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
			R162	LG0RD3300F608	O	O	O	RESISTOR, FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
			R163	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R164	LG0RD4702F608	O	O	O	RESISTOR, FIXED CARBON FILM	47K OHM 1/6 W 5.00% TA26	
			R168	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R169	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R171	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R172	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R301	LG0RD5602F608	O	O	O	RESISTOR, FIXED CARBON FILM	56K OHM 1/6 W 5.00% TA26	
			R302	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R303	LG0RD1802F608	O	O	O	RESISTOR, FIXED CARBON FILM	18K OHM 1/6 W 5.00% TA26	
			R304	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R305	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R306	LG0RD2202F608	O	O	O	RESISTOR, FIXED CARBON FILM	22K OHM 1/6 W 5.00% TA26	
			R307	LG0RD2201F608	O	O	O	RESISTOR, FIXED CARBON FILM	2.2K OHM 1/6 W 5.00% TA26	
			R308	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R309	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R310	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R311	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R312	LG0RD6802F608	O	O	O	RESISTOR, FIXED CARBON FILM	68K OHM 1/6 W 5.00% TA26	
			R313	LG0RD0221F608	O	O	O	RESISTOR, FIXED CARBON FILM	2.2 OHM 1/6 W 5.00% TA26	
			R314	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R315	LG0RD0472F608	O	O	O	RESISTOR, FIXED CARBON FILM	47 OHM 1/6 W 5.00% TA26	
			R316	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R317	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R318	LG0RD3901F608	O	O	O	RESISTOR, FIXED CARBON FILM	3.9K OHM 1/6 W 5.00% TA26	
			R319	LG0RD5600F608	O	O	O	RESISTOR, FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
			R320	LG0RD1500F608	O	O	O	RESISTOR, FIXED CARBON FILM	150 OHM 1/6 W 5.00% TA26	
			R321	LG0RD1201F608	O	O	O	RESISTOR, FIXED CARBON FILM	1.2K OHM 1/6 W 5.00% TA26	
			R322	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R323	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R324	LG0RD3303F608	O	O	O	RESISTOR, FIXED CARBON FILM	330K OHM 1/6 W 5.00% TA26	
			R325	LG0RD4700F608	O	O	O	RESISTOR, FIXED CARBON FILM	470 OHM 1/6 W 5.00% TA26	
			R326	LG0RD1202F608	O	O	O	RESISTOR, FIXED CARBON FILM	12K OHM 1/6 W 5.00% TA26	
			R327	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R328	LG0RD2700F608	O	O	O	RESISTOR, FIXED CARBON FILM	270 OHM 1/6 W 5.00% TA26	
			R329	LG0RD1202F608	O	O	O	RESISTOR, FIXED CARBON FILM	12K OHM 1/6 W 5.00% TA26	
			R330	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R331	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R332	LG0RD4702F608	O	O	O	RESISTOR, FIXED CARBON FILM	47K OHM 1/6 W 5.00% TA26	
			R333	LG0RD3901F608	O	O	O	RESISTOR, FIXED CARBON FILM	3.9K OHM 1/6 W 5.00% TA26	
			R334	LG0RD2701F608	O	O	O	RESISTOR, FIXED CARBON FILM	2.7K OHM 1/6 W 5.00% TA26	
			R335	LG0RD6801F608	O	O	O	RESISTOR, FIXED CARBON FILM	6.8K OHM 1/6 W 5.00% TA26	
			R336	LG0RD1003F608	O	O	O	RESISTOR, FIXED CARBON FILM	100K OHM 1/6 W 5.00% TA26	
			R337	LG0RD2201F608	O	O	O	RESISTOR, FIXED CARBON FILM	2.2K OHM 1/6 W 5.00% TA26	
			R338	LG0RD2700F608	O	O	O	RESISTOR, FIXED CARBON FILM	270 OHM 1/6 W 5.00% TA26	
			R339	LG0RD5600F608	O	O	O	RESISTOR, FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
			R340	LG0RD1802F608	O	O	O	RESISTOR, FIXED CARBON FILM	18K OHM 1/6 W 5.00% TA26	
			R341	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R342	LG0RD5600F608	O	O	O	RESISTOR, FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
			R345	LG0RD4700F608	O	O	O	RESISTOR, FIXED CARBON FILM	470 OHM 1/6 W 5.00% TA26	
			R346	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R347	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R349	LG0RD1801F608	O	O	O	RESISTOR, FIXED CARBON FILM	1.8K OHM 1/6 W 5.00% TA26	
			R350	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R351	LG0RD8203F608	O	O	O	RESISTOR, FIXED CARBON FILM	820K OHM 1/6 W 5.00% TA26	
			R501	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS	
			R502	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R503	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R504	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R505	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R508	LG0RD3301F608	O	O	O	RESISTOR, FIXED CARBON FILM	3.3K OHM 1/6 W 5.00% TA26	
			R509	LG0RD1801F608	O	O	O	RESISTOR, FIXED CARBON FILM	1.8K OHM 1/6 W 5.00% TA26	
			R510	LG0RD2201F608	O	O	O	RESISTOR, FIXED CARBON FILM	2.2K OHM 1/6 W 5.00% TA26	
			R511	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R512	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R513	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R514	LG0RD1203F608	O	O	O	RESISTOR, FIXED CARBON FILM	120K OHM 1/6 W 5.00% TA26	
			R515	LG0RD1801F608	O	O	O	RESISTOR, FIXED CARBON FILM	1.8K OHM 1/6 W 5.00% TA26	
			R516	LG0RD4703F608	O	O	O	RESISTOR, FIXED CARBON FILM	470K OHM 1/6 W 5.00% TA26	
			R517	LG0RD4700F608	O	O	O	RESISTOR, FIXED CARBON FILM	470 OHM 1/6 W 5.00% TA26	
			R518	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R520	LG0RD3901F608	O	O	O	RESISTOR, FIXED CARBON FILM	3.9K OHM 1/6 W 5.00% TA26	
			R521	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R522	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R523	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R524	LG0RD0222F608	O	O	O	RESISTOR, FIXED CARBON FILM	22 OHM 1/6 W 5.00% TA26	
			R525	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R526	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R528	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R529	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R530	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R531	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R535	LG0RD4703F608	O	O	O	RESISTOR, FIXED CARBON FILM	470K OHM 1/6 W 5.00% TA26	
			R542	LG0RD2201F608	O	O	O	RESISTOR, FIXED CARBON FILM	2.2K OHM 1/6 W 5.00% TA26	
			R543	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R544	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R546	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R547	LG0RD1202F608	O	O	O	RESISTOR, FIXED CARBON FILM	12K OHM 1/6 W 5.00% TA26	
			R548	LG0RD1003F608	O	O	O	RESISTOR, FIXED CARBON FILM	100K OHM 1/6 W 5.00% TA26	
			R550	LG0RD2200F608	O	O	O	RESISTOR, FIXED CARBON FILM	220 OHM 1/6 W 5.00% TA26	
			R553	LG0RD2200F608	O	O	O	RESISTOR, FIXED CARBON FILM	220 OHM 1/6 W 5.00% TA26	
			R555	LG0RD2200F608	O	O	O	RESISTOR, FIXED CARBON FILM	220 OHM 1/6 W 5.00% TA26	
			R556	LG0RD2202F608	O	O	O	RESISTOR, FIXED CARBON FILM	22K OHM 1/6 W 5.00% TA26	
			R557	LG0RD2702F608	O	O	O	RESISTOR, FIXED CARBON FILM	27K OHM 1/6 W 5.00% TA26	
			R558	LG0RD2202F608	O	O	O	RESISTOR, FIXED CARBON FILM	22K OHM 1/6 W 5.00% TA26	
			R559	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R560	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R561	LG0RD5600F608	O	O	O	RESISTOR, FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
			R562	LG0RD5600F608	O	O	O	RESISTOR, FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
			R563	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R564	LG0RD2702F608	O	O	O	RESISTOR, FIXED CARBON FILM	27K OHM 1/6 W 5.00% TA26	
			R566	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R567	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R568	LG0RD6802F608	O	O	O	RESISTOR, FIXED CARBON FILM	68K OHM 1/6 W 5.00% TA26	
			R569	LG0RD1004F608	O	O	O	RESISTOR, FIXED CARBON FILM	1M OHM 1/6 W 5.00% TA26	
			R570	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R575	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R576	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R577	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R578	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R579	LG0RD5602F608	O	O	O	RESISTOR, FIXED CARBON FILM	56K OHM 1/6 W 5.00% TA26	
			R582	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R583	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R589	LG0RD1004F608	O	O	O	RESISTOR, FIXED CARBON FILM	1M OHM 1/6 W 5.00% TA26	
			R591	LG0RD1003F608	O	O	O	RESISTOR, FIXED CARBON FILM	100K OHM 1/6 W 5.00% TA26	
			R5A2	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R5A3	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R5A5	LG0RD4703F608	O	O	O	RESISTOR, FIXED CARBON FILM	470K OHM 1/6 W 5.00% TA26	
			R5B3	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R5B4	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R5B5	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS	
			R5C1	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R5C5	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R5C6	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R5C7	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R5C9	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R5P2	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R5P3	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R5R8	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R5S1	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R701	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R704	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R705	LG0RD2200F608	O	O	O	RESISTOR, FIXED CARBON FILM	220 OHM 1/6 W 5.00% TA26	
			R706	LG0RD2200F608	O	O	O	RESISTOR, FIXED CARBON FILM	220 OHM 1/6 W 5.00% TA26	
			R707	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R710	LG0RD3301F608	O	O	O	RESISTOR, FIXED CARBON FILM	3.3K OHM 1/6 W 5.00% TA26	
			R711	LG0RD3301F608	O	O	O	RESISTOR, FIXED CARBON FILM	3.3K OHM 1/6 W 5.00% TA26	
			R712	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R713	LG0RD5601F608	O	O	O	RESISTOR, FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
			R715	LG0RD3901F608	O	O	O	RESISTOR, FIXED CARBON FILM	3.9K OHM 1/6 W 5.00% TA26	
			R716	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R717	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R718	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R7M2	LG0RD2200F608	O	O	O	RESISTOR, FIXED CARBON FILM	220 OHM 1/6 W 5.00% TA26	
			R7M5	LG0RD2200F608	O	O	O	RESISTOR, FIXED CARBON FILM	220 OHM 1/6 W 5.00% TA26	
			R7V1	LG0RD1004F608	O	O	O	RESISTOR, FIXED CARBON FILM	1M OHM 1/6 W 5.00% TA26	
			R7V2	LG0RD8202F608	O	O	O	RESISTOR, FIXED CARBON FILM	82K OHM 1/6 W 5.00% TA26	
			R7V3	LG0RD6801F608	O	O	O	RESISTOR, FIXED CARBON FILM	6.8K OHM 1/6 W 5.00% TA26	
			R7V4	LG0RD5603F608	O	O	O	RESISTOR, FIXED CARBON FILM	560K OHM 1/6 W 5.00% TA26	
			R7V5	LG0RD6801F608	O	O	O	RESISTOR, FIXED CARBON FILM	6.8K OHM 1/6 W 5.00% TA26	
			R7V6	LG0RD5603F608	O	O	O	RESISTOR, FIXED CARBON FILM	560K OHM 1/6 W 5.00% TA26	
			R7V7	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R7V8	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R7V9	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R801	LG0RD3304F608	O	O	O	RESISTOR, FIXED CARBON FILM	3.3M OHM 1/6 W 5.00% TA26	
			R802	LG0RD3302F608	O	O	O	RESISTOR, FIXED CARBON FILM	33K OHM 1/6 W 5.00% TA26	
			R803	LG0RD2701F608	O	O	O	RESISTOR, FIXED CARBON FILM	2.7K OHM 1/6 W 5.00% TA26	
			R804	LG0RD3902F608	O	O	O	RESISTOR, FIXED CARBON FILM	39K OHM 1/6 W 5.00% TA26	
			R805	LG0RD2701F608	O	O	O	RESISTOR, FIXED CARBON FILM	2.7K OHM 1/6 W 5.00% TA26	
			R806	LG0RD3302F608	O	O	O	RESISTOR, FIXED CARBON FILM	33K OHM 1/6 W 5.00% TA26	
			R807	LG0RD4700F608	O	O	O	RESISTOR, FIXED CARBON FILM	470 OHM 1/6 W 5.00% TA26	
			R808	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R809	LG0RD1802F608	O	O	O	RESISTOR, FIXED CARBON FILM	18K OHM 1/6 W 5.00% TA26	
			R810	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R811	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R812	LG0RD1001F608	O	O	O	RESISTOR, FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
			R816	LG0RD4700F608	O	O	O	RESISTOR, FIXED CARBON FILM	470 OHM 1/6 W 5.00% TA26	
			R821	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R822	LG0RD2202F608	O	O	O	RESISTOR, FIXED CARBON FILM	22K OHM 1/6 W 5.00% TA26	
			R823	LG0RD1002F608	O	O	O	RESISTOR, FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
			R824	LG0RD2202F608	O	O	O	RESISTOR, FIXED CARBON FILM	22K OHM 1/6 W 5.00% TA26	
			R825	LG0RD5600F608	O	O	O	RESISTOR, FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
			R826	LG0RD5600F608	O	O	O	RESISTOR, FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
			R835	LG0RD0752F608	O	O	O	RESISTOR, FIXED CARBON FILM	75 OHM 1/6 W 5.00% TA26	
			R842	LG0RD3300F608	O	O	O	RESISTOR, FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
			R843	LG0RD3300F608	O	O	O	RESISTOR, FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
			R850	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R851	LG0RD1000F608	O	O	O	RESISTOR, FIXED CARBON FILM	100 OHM 1/6 W 5.00% TA26	
			R861	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R862	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R869	LG0RD3300F608	O	O	O	RESISTOR, FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
			R870	LG0RD3300F608	O	O	O	RESISTOR, FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
			R874	LG0RD0752F608	O	O	O	RESISTOR, FIXED CARBON FILM	75 OHM 1/6 W 5.00% TA26	
			R875	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R876	LG0RD4701F608	O	O	O	RESISTOR, FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
			R877	LG0RD5600F608	O	O	O	RESISTOR, FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
		R878	LG0RD5600F608	O	O	O	RESISTOR,FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
		R890	LG0RD0752F608	O	O	O	RESISTOR,FIXED CARBON FILM	75 OHM 1/6 W 5.00% TA26	
		R890	LG0RD5600F608	O			RESISTOR,FIXED CARBON FILM	560 OHM 1/6 W 5.00% TA26	
		R901	LG0RD1202F608	O	O	O	RESISTOR,FIXED CARBON FILM	12K OHM 1/6 W 5.00% TA26	
		R902	LG0RD1002F608	O	O	O	RESISTOR,FIXED CARBON FILM	10K OHM 1/6 W 5.00% TA26	
		R903	LG0RD0752F608	O	O	O	RESISTOR,FIXED CARBON FILM	75 OHM 1/6 W 5.00% TA26	
		R913	LG0RD0752F608	O	O	O	RESISTOR,FIXED CARBON FILM	75 OHM 1/6 W 5.00% TA26	
		R914	LG0RD0752F608	O	O	O	RESISTOR,FIXED CARBON FILM	75 OHM 1/6 W 5.00% TA26	
		R915	LG0RD5601F608	O	O	O	RESISTOR,FIXED CARBON FILM	5.6K OHM 1/6 W 5.00% TA26	
		R921	LG0RD4701F608	O	O	O	RESISTOR,FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
		R922	LG0RD4701F608	O	O	O	RESISTOR,FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
		RS501	LG6500RAB003A	O	O	O	SENSOR	SG-260 KODENSHI D33 REEL SENSO	
		RS502	LG6500RAB003A	O	O	O	SENSOR	SG-260 KODENSHI D33 REEL SENSO	
		SC901	LG6620RM0002J	O	O	O	JACK,SCART	DSAM-0121 DOOWON 2F-21P(BL-BK)	
		SC901	LG6620RM0002L	O			JACK,SCART	DSAM-0139 DOOWON 2F-21P(BK-BK)	
△		T101	LG6170RNGW12A	O	O	O	TRANSFORMER,SMPS[COIL]	EER3530 SOOJUNG WIDE EER3530	
		TU701	LG6700PFPL03C	O			TUNER	I TADC-U301D LG PAL FS Y2K2	
		TU701	LG6700PFPL03F		O	O	TUNER	TADC-M341D HIFI Y2K2 LG PAL FS	
△		V101	LG656-004C	O	O	O	VARISTOR	SVC681D-10A SAMHWA 4.0 CUT	
		X301	LG6202R2443AC	O	O	O	RESONATOR,CRYSTAL	HC49U BUBANG 4-433709MHZ 15	
		X501	LG6212AA2100C	O	O	O	RESONATOR,CRYSTAL	HC-49S BUBANG 10MHZ +/- 30 PPM	
		X751	LG529-021Q	O	O	O	RESONATOR,CRYSTAL	49U BUBANG 18432000HZ 30PPM 16	
		ZD101	LG0DZ332609FA	O	O	O	DIODE,ZENER	UZ-3.3BSB 26MM TP PYUNG CHANG	
		ZD103	LG0DZ132609BB	O	O	O	DIODE,ZENER	UZ-13BSA 26MM TP PYUNG CHANG	
		ZD105	LG0DZ562609AB	O	O	O	DIODE,ZENER	UZ-5.6BSC 26MM TP PYUNG CHANG	
		ZD503	LG0DZ620009AM	O	O	O	DIODE,ZENERS	UZ-6.2BSC 26MM PYUNG CHANG TP	
		ZD801	LG0DZ562609AB	O	O	O	DIODE,ZENER	UZ-5.6BSC 26MM TP PYUNG CHANG	
		ZD802	LG0DZ562609AB	O	O	O	DIODE,ZENER	UZ-5.6BSC 26MM TP PYUNG CHANG	
		Q514	LG0TR100309AA	O	O	O	TRANSISTOR	KSR1003 TP (S/S)	
		Q515	LG0TR100309AA	O	O	O	TRANSISTOR	KSR1003 TP (S/S)	
		ZD103	LG0DZ130009AA	O	O	O	DIODE,ZENER	MTZ13A TP ROHM-K	
COMMON SECTION									
BOARD ASSEMBLY (A49)									
CAPACITOR									
		C601	LG0CE1064F638	O	O	O	CAPACITOR,ELECTROLYTIC	10M SRA 16V M FM5 TP(5)	
		C602	LG0CE4775C638	O	O	O	CAPACITOR,FIXED ELECTROLYTIC	470UF SR,SV 6.3V 20% FM5 TP 5	
		C603	LG0CN223AK948	O	O	O	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 50V Z F TA26 S	
		C604	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C606	LG0CN1040K948	O	O	O	CAPACITOR,FIXED TUBULAR(High d	0.1UF D 50V 80%,-20% F(Y5V) TA	
		C611	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C612	LG0CN1020K518	O	O	O	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		DG601	LG6302RCV118B	O	O	O	DIGITRON	VFD25-1104A ZEC SEG VFD COMBI	
		IC601	LG0IPRPNE001A	O	O	O	IC,PERIPHERALS	UPD16315GB-3BS NEC 44 QFP BK F	
		L601	LG0LR8200J025	O	O	O	INDUCTOR,RADIAL LEAD	820UH 5% 4X5 TR5	
		L602	LG0LA1000K018	O	O	O	INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
		L603	LG0LA1000K018	O	O	O	INDUCTOR AXIAL LEAD	100M K 2.3X3.4 L5 TP	
		R601	LG0RD1001F608	O	O	O	RESISTOR,FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
		R602	LG0RD1001F608	O	O	O	RESISTOR,FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
		R603	LG0RD1001F608	O	O	O	RESISTOR,FIXED CARBON FILM	1K OHM 1/6 W 5.00% TA26	
		R604	LG0RD5602F608	O	O	O	RESISTOR,FIXED CARBON FILM	56K OHM 1/6 W 5.00% TA26	
		R605	LG0RD3300F608	O	O	O	RESISTOR,FIXED CARBON FILM	330 OHM 1/6 W 5.00% TA26	
		R606	LG0RD0471F608	O	O	O	RESISTOR,FIXED CARBON FILM	4.7 OHM 1/6 W 5.00% TA26	
		R607	LG0RD0471F608	O	O	O	RESISTOR,FIXED CARBON FILM	4.7 OHM 1/6 W 5.00% TA26	
		R612	LG0RD6800F608	O	O	O	RESISTOR,FIXED CARBON FILM	680 OHM 1/6 W 5.00% TA26	
		R613	LG0RD8200F608	O	O	O	RESISTOR,FIXED CARBON FILM	820 OHM 1/6 W 5.00% TA26	
		R614	LG0RD1201F608	O	O	O	RESISTOR,FIXED CARBON FILM	1.2K OHM 1/6 W 5.00% TA26	
		R615	LG0RD1501F608	O	O	O	RESISTOR,FIXED CARBON FILM	1.5K OHM 1/6 W 5.00% TA26	
		R616	LG0RD2201F608	O	O	O	RESISTOR,FIXED CARBON FILM	2.2K OHM 1/6 W 5.00% TA26	
		R617	LG0RD3301F608	O	O	O	RESISTOR,FIXED CARBON FILM	3.3K OHM 1/6 W 5.00% TA26	
		R618	LG0RD4701F608	O	O	O	RESISTOR,FIXED CARBON FILM	4.7K OHM 1/6 W 5.00% TA26	
		R619	LG0RD8201F608	O	O	O	RESISTOR,FIXED CARBON FILM	8.2K OHM 1/6 W 5.00% TA26	
		R620	LG0RD1502F608	O	O	O	RESISTOR,FIXED CARBON FILM	15K OHM 1/6 W 5.00% TA26	
		R641	LG0RD0752F608	O	O	O	RESISTOR,FIXED CARBON FILM	75 OHM 1/6 W 5.00% TA26	
		RC601	LG6712R1638GA	O	O	O	REMOTE CONTROLLER RECEIVER	TSOP1838RF1 VISHAY(TEMIC) 37-	

S	AL	LOCA.NO	PART NO(LG)	A	B	C	DESCRIPTION	SPECIFICATION	REMARKS
		SW601	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW603	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW605	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW607	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW608	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW609	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW610	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
BOARD ASSEMBLY (A42)									
		LED601	LG0DL112000AJ	O	O	O	DIODE,LED	DL-11S2RNS(SUPER,RED,03)KOC	
		LED602	LG0DL112000AJ	O	O	O	DIODE,LED	DL-11S2RNS(SUPER,RED,03)KOC	
		R630	LG0RD1500F608	O	O	O	RESISTOR,FIXED CARBON FILM	150 OHM 1/6 W 5.00% TA26	
		R631	LG0RD1500F608	O	O	O	RESISTOR,FIXED CARBON FILM	150 OHM 1/6 W 5.00% TA26	
		R633	LG0RD6800F608	O	O	O	RESISTOR,FIXED CARBON FILM	680 OHM 1/6 W 5.00% TA26	
		R634	LG0RD8200F608	O	O	O	RESISTOR,FIXED CARBON FILM	820 OHM 1/6 W 5.00% TA26	
		R635	LG0RD1201F608	O	O	O	RESISTOR,FIXED CARBON FILM	1.2K OHM 1/6 W 5.00% TA26	
		R636	LG0RD1501F608	O	O	O	RESISTOR,FIXED CARBON FILM	1.5K OHM 1/6 W 5.00% TA26	
		R637	LG0RD2201F608	O	O	O	RESISTOR,FIXED CARBON FILM	2.2K OHM 1/6 W 5.00% TA26	
		SW632	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW633	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW634	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW635	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	
		SW636	LG556-219B	O	O	O	SWITCH,TACT	THVV502GAA POSTECH DC 12 V 5-	



SANYO Electric Co.,Ltd.
Osaka, Japan