


1st Edition

SHARP**SERVICE MANUAL****COLOR TELEVISION****Chassis No. GB-1****MODELS 27U-S610**

In the interests of user-safety (Required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

CONTENTS

	Page
• ELECTRICAL SPECIFICATIONS	1
• IMPORTANT SERVICE SAFETY PRECAUTION	2
• LOCATION OF USER'S CONTROL	4
• INSTALLATION AND SERVICE INSTRUCTIONS	5
• SERVICE ADJUSTMENT	9
• CHASSIS LAYOUT	13
• BLOCK DIAGRAM	16
• SCHEMATIC DIAGRAMS	18
• PRINTED WIRING BOARD ASSEMBLIES	25
• REPLACEMENT PARTS LIST	31
• PACKING OF THE SET	42

ELECTRICAL SPECIFICATIONS

POWER INPUT 120V AC 60 Hz
 POWER RATING 126W
 PICTURE SIZE 2,187cm² (339sq inch)
 CONVERGENCE Magnetic
 SWEEP DEFLECTION Magnetic
 FOCUS Hi-Bi-Potential Electrostatic
 INTERMEDIATE FREQUENCIES
 Picture IF Carrier Frequency 45.75 MHz
 Sound IF Carrier Frequency 41.25 MHz
 Color Sub-Carrier Frequency 42.17 MHz
 (Nominal)

AUDIO POWER

OUTPUT RATING 3.0W + 3.0W (at 10% distortion and
 Dual CH Operate)

SPEAKER

SIZE 9 x 5 cm oval (2 pcs.)
 VOICE COIL IMPEDANCE 8 ohm at 400 Hz

ANTENNA INPUT IMPEDANCE

VHF/UHF 75 ohm Unbalanced

TUNING RANGES

VHF-Channels 2 thru 13

UHF-Channels 14 thru 69

CATV Channels 1 thru 125

(EIA, Channel Plan U.S.A.)

Specifications are subject to change without prior notice.

SHARP CORPORATION

This document has been published to be used for after sales service only.


The contents are subject to change without notice.

IMPORTANT SERVICE SAFETY PRECAUTION

- Service work should be performed only by qualified service technicians who are thoroughly familiar with all safety checks and the servicing guidelines which follow:

WARNING

1. For continued safety, no modification of any circuit should be attempted.
2. Disconnect AC power before servicing.
3. Semiconductor heat sinks are potential shock hazards when the chassis is operating.
4. The chassis in this receiver has two ground systems which are separated by insulating material. The non-isolated (hot) ground system is for the B+ voltage regulator circuit. The isolated ground system is for the low B+ DC voltages and the secondary circuit of the high voltage transformer.
To prevent electrical shock use an isolation transformer between the line cord and power receptacle, when servicing this chassis.

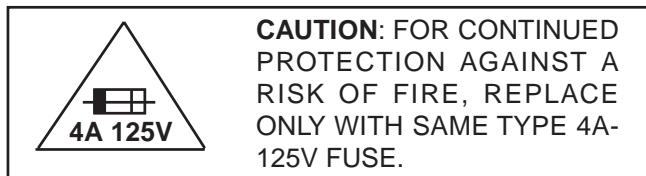

SERVICING OF HIGH VOLTAGE SYSTEM AND PICTURE TUBE

When servicing the high voltage system, remove the static charge by connecting a 10k ohm resistor in series with an insulated wire (such as a test probe) between the picture tube ground and the anode lead. (AC line cord should be disconnected from AC outlet.)

1. Picture tube in this receiver employs integral implosion protection.
2. Replace with tube of the same type number for continued safety.
3. Do not lift picture tube by the neck.
4. Handle the picture tube only when wearing shatterproof goggles and after discharging the high voltage anode completely.

X-RADIATION AND HIGH VOLTAGE LIMITS

1. Be sure all service personnel are aware of the procedures and instructions covering X-radiation. The only potential source of X-ray in current solid state TV receivers is the picture tube. However, the picture tube does not emit measurable X-Ray radiation, if the high voltage is as specified in the "High Voltage Check" instructions.
It is only when high voltage is excessive that X-radiation is capable of penetrating the shell of the picture tube including the lead in the glass material. The important precaution is to keep the high voltage below the maximum level specified.
2. It is essential that servicemen have available at all times an accurate high voltage meter. The calibration of this meter should be checked periodically.
3. High voltage should always be kept at the rated value –no higher. Operation at higher voltages may cause a failure of the picture tube or high voltage circuitry and;also, under certain conditions, may produce radiation in exceeding of desirable levels.
4. When the high voltage regulator is operating properly there is no possibility of an X-radiation problem. Every time a color chassis is serviced, the brightness should be tested while monitoring the high voltage with a meter to be certain that the high voltage does not exceed the specified value and that it is regulating correctly.
5. Do not use a picture tube other than that specified or make unrecommended circuit modifications to the high voltage circuitry.
6. When trouble shooting and taking test measurements on a receiver with excessive high voltage, avoid being unnecessarily close to the receiver.
Do not operate the receiver longer than is necessary to locate the cause of excessive voltage.

IMPORTANT SERVICE SAFETY PRECAUTION

(Continued)

BEFORE RETURNING THE RECEIVER

(Fire & Shock Hazard)


Before returning the receiver to the user, perform the following safety checks.

1. Inspect all lead dress to make certain that leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the receiver.
2. Inspect all protective devices such as non-metallic control knobs, insulating materials, cabinet backs, adjustment and compartment covers or shields, isolation resistor-capacity networks, mechanical insulators, etc.
3. To be sure that no shock hazard exists, check for leakage current in the following manner.
 - Plug the AC cord directly into a 120 volt AC outlet, (Do not use an isolation transformer for this test).
 - Using two clip leads, connect a 1.5k ohm, 10 watt resistor paralleled by a 0.15 μ F capacitor in series with all exposed metal cabinet parts and a known earth ground, such as electrical conduit or electrical ground connected to earth ground.
 - Use an AC voltmeter having with 5000 ohm per volt, or higher, sensitivity to measure the AC voltage drop across the resistor.

- Connect the resistor connection to all exposed metal parts having a return to the chassis (antenna, metal cabinet, screw heads, knobs and control shafts, escutcheon, etc.) and measure the AC voltage drop across the resistor.

All checks must be repeated with the AC line cord plug connection reversed. (If necessary, a non-polarized adapter plug must be used only for the purpose of completing these check.)

Any current measured must not exceed 0.5 milliamp. Any measurements not within the limits outlined above indicate of a potential shock hazard and corrective action must be taken before returning the instrument to the customer.

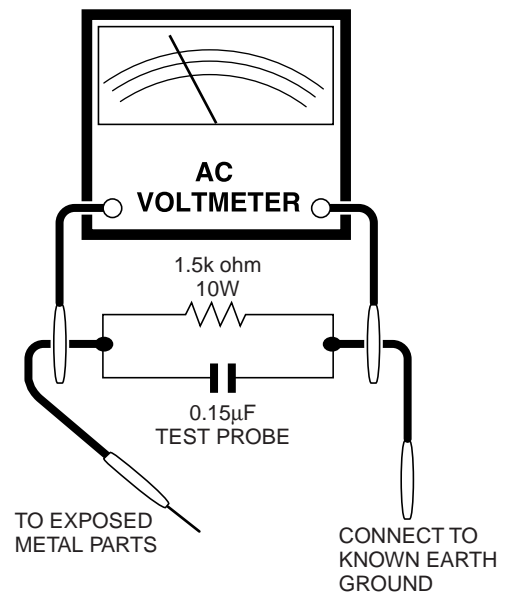

SAFETY NOTICE


Many electrical and mechanical parts in television receivers have special safety-related characteristics. These characteristics are often not evident from visual inspection, nor can protection afforded by them be necessarily increased by using replacement components rated for higher voltage, wattage, etc.

Replacement parts which have these special safety characteristics are identified in this manual; electrical components having such features are identified by " \triangle " and shaded areas in the Replacement Parts Lists and Schematic Diagrams.


For continued protection, replacement parts must be identical to those used in the original circuit. The use of substitute replacement parts which do not have the same safety characteristics as the factory recommended replacement parts shown in this service manual, may create shock, fire, X-radiation or other hazards.

LOCATION OF USER'S CONTROL

Front Panel

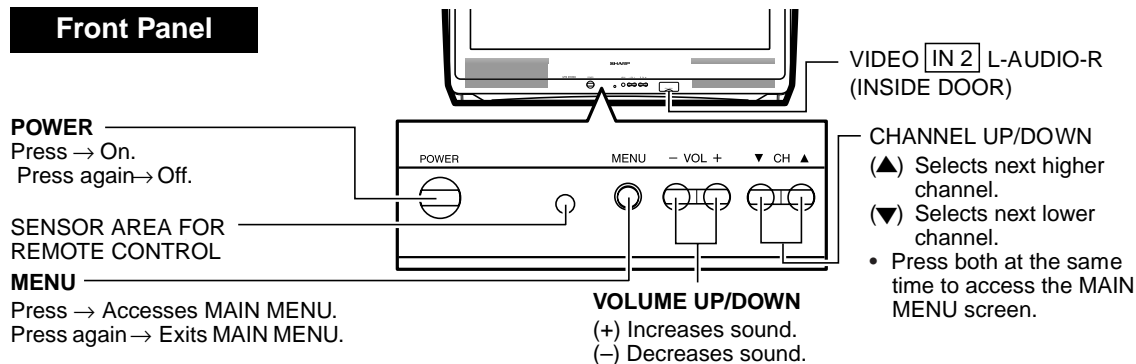

Basic Remote Control Functions

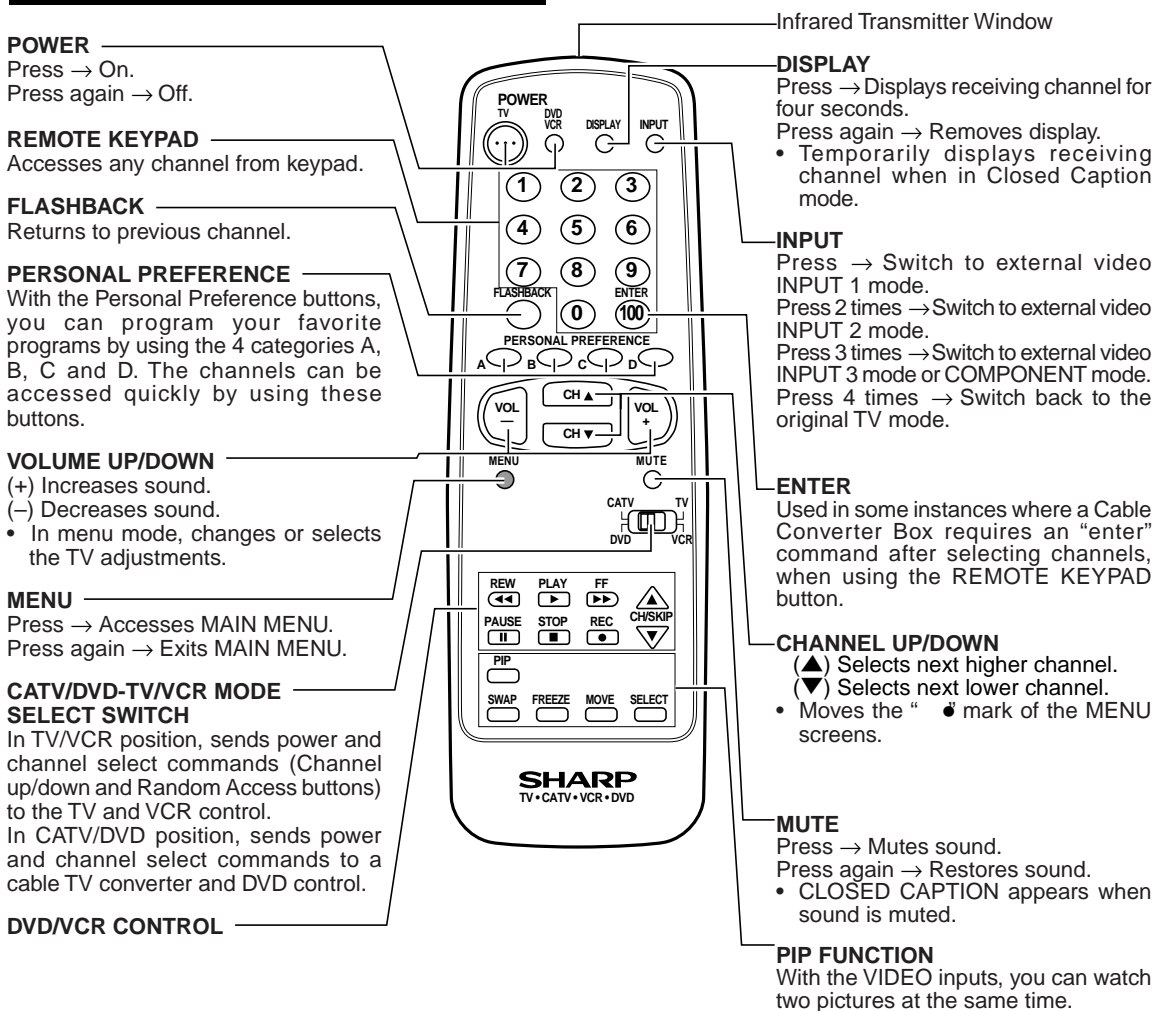

Note:

- The above shaded buttons on the Remote Control glow in the dark. To use the glow-in-the-dark display on the remote control, place it under a fluorescent light or other lighting.
- The phosphorescent material contains no radioactive or toxic material, so it is safe to use.
- The degree of illumination will vary depending on the strength of lighting used.
- The degree of illumination will decrease with time and depending on the temperature.
- The time needed to charge the phosphorescent display will vary depending on the surrounding lighting.
- Sunlight and fluorescent lighting are the most effective when charging the display.

INSTALLATION AND SERVICE INSTRUCTIONS

- Note:** (1) When performing any adjustments to resistor controls and transformers use non-metallic screwdrivers or TV alignment tools.
 (2) Before performing adjustments, the TV set must be on at least 15 minutes.

CIRCUIT PROTECTION

The receiver is protected by a 4.0A fuse (F701), mounted on PWB-A, wired into one side of the AC line input.

X-RADIATION PROTECTOR CIRCUIT TEST

After service has been performed on the horizontal deflection system, high voltage system, B+ system, test the X-Radiation protection circuit to ascertain proper operation as follows:

1. Apply 120V AC using a variac transformer for accurate input voltage.
2. Allow for warm up and adjust all customer controls for normal picture and sound.
3. Receive a good local channel.
4. Connect a digital voltmeter to TP651 and make sure that the voltmeter reads $13.2 \pm 0.7V$.
5. Apply external 16.3V DC at TP651 by using an external DC supply, TV must be shut off.
6. To reset the protector, unplug the AC cord and plug the AC cord power on. Now make sure that normal picture appears on the screen.
7. If the operation of the horizontal oscillator does not stop in step 5, the circuit must be repaired before the set is returned to the customer.

HIGH VOLTAGE CHECK

High voltage is not adjustable but must be checked to verify that the receiver is operating within safe and efficient design limitations as specified checks should be as follows:

1. Connect an accurate high voltage meter between ground and anode of picture tube.
2. Operate receiver for at least 15 minutes at 120V AC line voltage, with a strong air signal or a properly tuned in test signal.
3. Enter the service mode and select the service adjustment "V18" and Bus data "01" (Y-mute on, CRT Cut Off).
4. The voltage should be approximately 29.0kV (at zero beam).
If a correct reading cannot be obtained, check circuitry for malfunctioning components. After the voltage test, make Y-mute off to the normal mode.

For adjustments of this model, the bus data is converted to various analog signals by the D/A converter circuit.

Note: There are still a few analog adjustments in this series such as focus and master screen voltage. Follow the steps below whenever the service adjustment is required. See "Table-B" to determine, if service adjustments are required.

1. Service mode

Before putting unit into the service mode, check that customer adjustments are in the normal mode. Use the reset function in the video adjustment menu to ensure customer controls are in their proper (reset) position.

2. Service number selection

Once in the service mode, press the Ch-up or Ch-down button on the remote controller or at the set. The service adjustment number will vary in increments of one, from "V01" to "P08". Select the item you wish to adjust.

3. Data number selection

Press the Vol-up or Vol-down button to adjust the data number.

To enter the service mode and exit service mode.

To enter the service mode manually just press and hold the Vol-down and Ch-up buttons at the same time, plug the AC cord into a wall socket.

Now the TV set is switched on and enters the service mode.

To exit the service mode, turn the television off by pressing the power button.

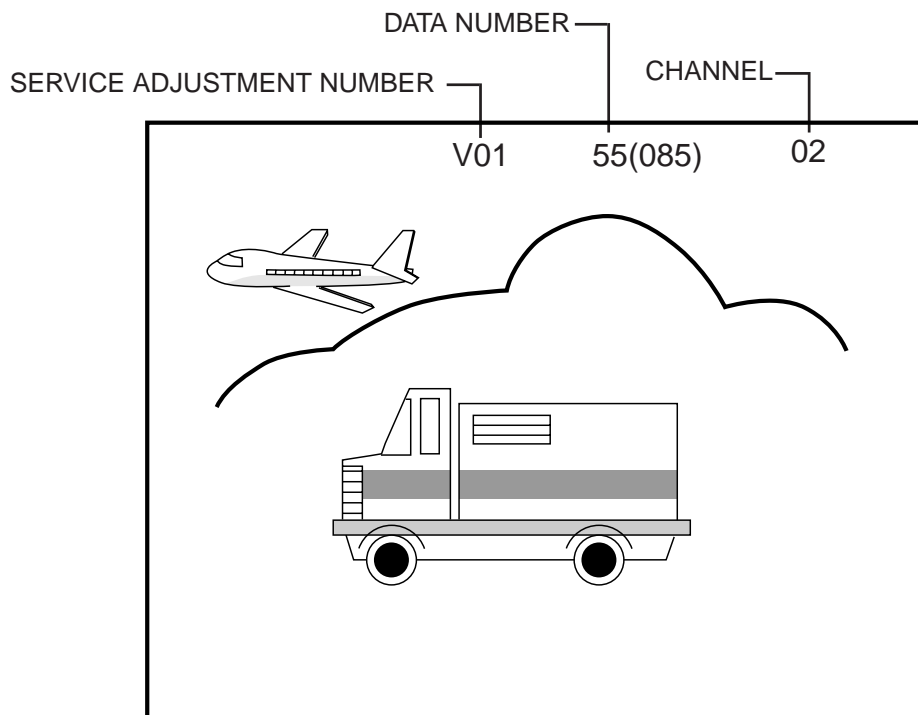


Figure A.

SERVICE NUMBER	ADJUSTMENT ITEM	DATA		ADJUSTMENT CONTENTS
		INITIAL VALUE	RANGE	
V01	PICTURE	03	0-15(00h-0Fh)	
V02	TINT	3E	0-127(00h-7Fh)	
V03	COLOR	2D	0-127(00h-7Fh)	
V04	SUB-COLOR	10	0-31(00h-1Fh)	Must be set to "10"
V05	BRIGHT	4D	0-127(00h-7Fh)	
V06	R CUT-OFF	40	64-255(40h-FFh)	
V07	G CUT-OFF	40	64-255(40h-FFh)	
V08	B CUT-OFF	40	64-255(40h-FFh)	
V09	G DRIVE	40	0-127(00h-7Fh)	
V10	B DRIVE	40	0-127(00h-7Fh)	
V11	SHARP	14	0-63(00h-3Fh)	Must be set to "1E"
V12	N PHASE	01	0-3(00h-03h)	Must be set to "01"
V13	DC RESTORATION	00	0-3(00h-03h)	Must be set to "03"
V14	BLACK STRETCH	03	0-3(00h-03h)	Must be set to "03"
V15	ABL START POINT	03	0-3(00h-03h)	Must be set to "03"
V16	ABL GAIN	02	0-3(00h-03h)	Must be set to "02"
V17	γ POINT	00	0-3(00h-03h)	Must be set to "02"
V18	Y-MUTE/V-STOP	00	0-2	"00"=Normal, "01"=No-Y, "02"=No-Y & No-Vertical
V19	ENERGY SAVE	28	0-63(00h-3Fh)	Must be set to "28"
V20	RTONE-G	F6	0-255(00h-FFh)	Must be set to "F6"
V21	RTONE-B	F6	0-255(00h-FFh)	Must be set to "F6"
V22	BTONE-G	00	0-255(00h-FFh)	Must be set to "00"
V23	BTONE-B	0A	0-255(00h-FFh)	Must be set to "0A"
V24	LOW-G	F7	0-255(00h-FFh)	Must be set to "F7"
V25	LOW-B	E8	0-255(00h-FFh)	Must be set to "E8"
V26	ML-G	00	0-255(00h-FFh)	Must be set to "00"
V27	ML-B	F9	0-255(00h-FFh)	Must be set to "F9"
V28	HIGH-G	03	0-255(00h-FFh)	Must be set to "03"
V29	HIGH-B	06	0-255(00h-FFh)	Must be set to "06"
V30	WPS	01	0-1	Must be set to "01"
V31	RGB CONTRAST	20	0-63(00h-3Fh)	Must be set to "31"
V32	Y-DL	02	0-7(00h-07h)	Must be set to "02"
V33	Y-DL-INPUT	01	0-7(00h-07h)	Must be set to "01"
V34	VSM GAIN	07	0-7(00h-07h)	Must be set to "07"
V35	N COMB	01	0-1	Must be set to "01"
V36	BPF/TOF-INPUT	00	0-1	Must be set to "01"
V37	CORING	00	0-1	Must be set to "00"
V38	VSM PHASE	00	0-1	Must be set to "00"
V39	COLOR γ	00	0-1	Must be set to "01"
V40	SHARP-INPUT	14	0-63(00h-3Fh)	Must be set to "1E"
V41	TINT-INPUT	3E	0-127(00h-7Fh)	
V42	PICTURE-COMPONENT	03	0-15(00h-0Fh)	
V43	TINT-COMPONENT	10	0-31(00h-1Fh)	Must be set to "10"
V44	COLOR-COMPONENT	30	0-127(00h-7Fh)	Must be set to "44"
V45	BRIGHT-COMPONENT	4A	0-127(00h-7Fh)	
V46	R CUT OFF-COMPONENT	40	64-255(40h-FFh)	
V47	G CUT OFF-COMPONENT	40	64-255(40h-FFh)	
V48	B CUT OFF-COMPONENT	40	64-255(40h-FFh)	
V49	G DRIVE-COMPONENT	40	0-127(00h-7Fh)	
V50	B DRIVR-COMPONENT	40	0-127(00h-7Fh)	
V51	SHARP COMPONENT	14	0-63(00h-3Fh)	Must be set to "1E"
V52	N PHASE-COMPONENT	01	0-3(00h-03h)	Must be set to "01"
V53	C-TRAP	00	0-1	Must be set to "00"
R01	RF-AGC	24	0-63(00h-3Fh)	
R02	PIF VCO coil	-		
R03	RF-AGC REF	5C	0-255(00h-FFh)	Must be set to "5C"
D01	V POSITION	00	0-7(00h-07h)	
D02	H POSITION	10	0-31(00h-1Fh)	
D03	V SIZE	12	0-63(00h-3Fh)	
D04	H SIZE	1F	0-63(00h-3Fh)	Must be set to "38"
D05	V-LINEARITY	07	0-15(00h-0Fh)	
D06	V-S CORRECTION	08	0-15(00h-0Fh)	Must be set to "08"

Table - A

SERVICE NUMBER	ADJUSTMENT ITEM	DATA		ADJUSTMENT CONTENTS
		INITIAL VALUE	RANGE	
D07	EW PARABOLA	21	0-63(00h-3Fh)	Must be set to "04"
D08	EW TRAPEZIUM	0E	0-31(00h-1Fh)	Must be set to "0E"
D09	EW CORNER	0C	0-15(00h-0Fh)	Must be set to "04"
D10	AFC GAIN	02	0-3(00h-03h)	Must be set to "02"
D11	V EHT	07	0-7(00h-07h)	Must be set to "07"
D12	H EHT	03	0-7(00h-07h)	Must be set to "03"
EX1	FAO VOLUME	24	0-50(00h-32h)	Must be set to "24"
EX2	CC-POSITION	21	0-127(00h-7Fh)	
EX3	INT	7A	0-255(00h-FFh)	Must be set to "7A"
EX4	A-ATT	5A	0-127	
EX5	TUNER data	00	0-3(00h-03h)	Must be to "00"
EX6	SYNC SLICE LEVEL	36	0-255(00h-FFh)	Must be to "36"
OP1	OPTION1	F7	0-255(00h-FFh)	Must be set to "F7"
OP2	OPTION2	F9	0-7(00h-07h)	Must be set to "10" (27U-S600), "B9" (27U-S710)
OP3	OPTION3	FF		Must be set to "0C" (27U-S600), "0E" (27U-S710)
M01	INPUT LEVEL	09	0-15(00h-0Fh)	Must be set to "09"
M02	MTS VCO	24	0-63(00h-3Fh)	
M03	FILTER	1F	0-63(00h-3Fh)	
M04	WIDEBAND	18	0-63(00h-3Fh)	
M05	SPECTRAL	10	0-63(00h-3Fh)	
P01	CONTRAST-PIP	32	0-127(00h-7Fh)	
P02	TINT-PIP	29	0-63(00h-3Fh)	Must be set to "29"
P03	COLOR-SAT-PIP	32	0-127(00h-7Fh)	
P04	Y-OFFSET-PIP	09	0-31(00h-1Fh)	Must be set to "09"
P05	HXA-PIP	0A	0-255(00h-FFh)	Must be set to "0A"
P06	HADJ-PIP	00	0-15(00h-0Fh)	Must be set to "00"
P07	FREE RUN-PIP	0B	0-15(00h-0Fh)	Must be set to "0B"
P08	TINT-PIP-INPUT	24	0-63(00h-3Fh)	Must be set to "24"

Table - A

Holding down both the VOL-up and CH-up buttons on the TV set at service mode for more than 2 seconds will automatically write the above initial values into IC2102.

PART REPLACED	ADJUSTMENT		NOTES
	NECESSARY	UNNECESSARY	
IC2001		X	Data is stored in IC2102.
IC201	X		The adjustment is needed to compensate for characteristics of parts including IC201 and MTS level (M01).
IC2102	X		Holding down both the VOL-up and CH-up buttons on the TV set in the service mode for more than 2 seconds will automatically write the above initial values into IC2102. Then perform a complete adjustment.
CRT	X		Adjust items related to picture tube only.
IC3001	X		Adjust items related to MTS only (M01~M20).
IC1801	X		Adjust items related to P-IN-P only (P01~P08).

Table - B

SERVICE ADJUSTMENT

RF AGC Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "R01".
3. Set the data value to point where no noise or beat appears.
4. Select another channel to confirm that no noise or beat appears.

Note 1 : You will have to come out of the service mode to select another channel.

Note 2 : Setting the data to "00" will produce a black raster.

Screen Adjustment


1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "V03" and set the data value to "00" to set the color level to minimum. (Record original data code under adjustment "V03" before changing) You may skip this step, if you selected a B/W picture or monoscope pattern.
3. Select the service adjustment "V18" and adjust the data value to "01", this turn off the luminance signal (Y-mute).
4. Adjust the master screen control until the raster darkens to the point where raster is barely seen.
5. Adjust the service adjustments "V06" red, "V07" green and "V08" blue to obtain a good grey scale with normal whites at low brightness level.
6. Select the service adjustment "V18" and reset data to "00". Select the service adjustment "V03" and reset data to obtain normal color level.
7. For component input, the data value of "V46" red, "V47" green and "V48" blue is adjusted to follow the data value of "V06", "V07" and "V08" respectively.
8. Reset the master screen control to obtain normal brightness range.

White Balance Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "V03" and set to "00" (minimum color)(Record original data code under adjustment "V03" before changing). "V03" does not have to be adjusted, if you selected a B/W picture or monoscope pattern.
3. Alternately adjust the service adjustment data of "V09" and "V10" until a good grey scale with normal whites is obtained. (RF Input)
4. For component input, the data value of "V49" and "V50" is adjusted to follow the data value of "V09" and "V10" respectively.
5. Select the service adjustment "V03" and reset data to obtain normal color level.

Picture Adjustment

1. Receive a good local channel.
2. Make sure the customer picture control is set to maximum.
3. Enter the service mode and select the service adjustment "V01".
4. Adjust the data value to achieve normal contrast range.
5. For component input, Enter the service mode ant select the service adjustment "V42".
6. Adjust "V42" data value to obtain normal contrast range.




VOLTAGE CONFIRMATION

A: $86 \pm 10 \text{cd/m}_2$

B: $1.25 \pm 0.5 \text{cd/m}_2$

Tint Adjustment

1. Receive a good local channel.
2. Set customer tint control to center of it's range.
3. Enter the service mode and select the service adjustment "V02".
4. Adjust "V02" data value to obtain normal flesh tones.
5. Input same data to "V41".

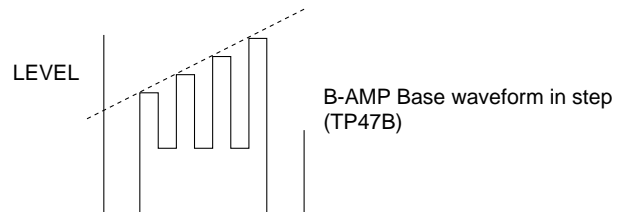

- RF INPUT (TU52)
- 4. Input data of "V55" to minus 1 step from "V02" data.
- AV INPUT
- 5. Input data of "V41" to minus 5 step from "V02" data.

Sub-Color Adjustment

1. Receive a good local channel.
2. Make sure the customer color control is set to center position .
3. Enter the service mode and select service adjustment "V03".
4. Adjust "V03" data value to obtain normal color level.

Brightness Adjustment

1. Receive a good local channel.
2. Make sure the customer brightness control is set to center position.
3. Enter the service mode and select the service adjustment "V05".
4. Adjust "V05" data value to obtain normal brightness level.
5. For component input, Enter the service mode and select the service adjustment "V45".
6. Adjust "V45" data value to obtain normal contrast range.

Vertical-Size and Linearity Adjustments

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "D03" for V-size.
3. Adjust the "D03" bus data to get the proper V-size.
4. For V-linearity adjustment, select data bus "D05" and adjust to get the proper vertical linearity.

Note: Aging for 10 min before adjustment. After the adjustment of V-center and V-size, re-adjustment for this V-line.

Vertical Phase Adjustment

1. Enter the service mode and select the service adjustment "D01".
2. Adjust "D01" data value so that picture is centered.

Horizontal Position Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "D02".
3. Adjust "D02" data value so that picture is centered.

Caption Position Adjustment (Horizontal)

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "EX2".
3. A black text box appears on the screen. (see **Figure B.** below)
4. Adjust "EX2" data value so that text box is positioned in the center of the screen.

Other Adjustments

1. Enter the service mode.
2. Adjust the following data values as listed below.

SERVICE POSITION	ADJUST ITEM	DATA(Hex)
OP1	OPTION1	F7
OP2	OPTION2	10
OP3	OPTION3	0C

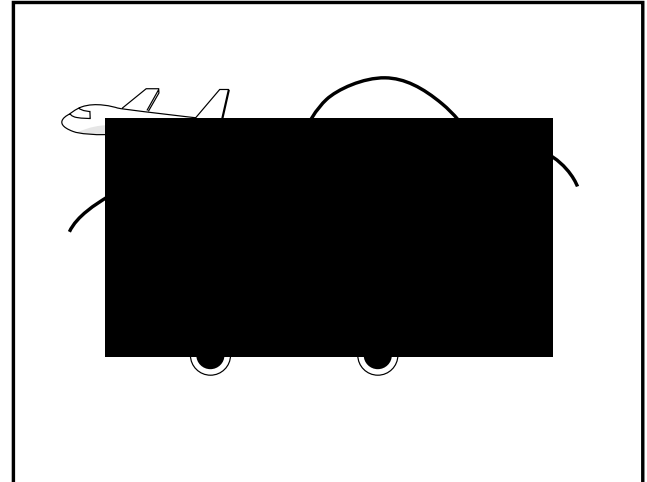


Figure B.

■ MTS ADJUSTMENT

MTS Level Adjustment

1. Receive the following composite signal.
Monaural signal: 400Hz, 100% modulation
2. Connect the rms voltmeter to pin (39) of IC3001.
3. Enter the service mode and select the service adjustment "M01" and set to "09".
4. Enter the service mode and select the service adjustment "EX4".
5. Adjust the data so that the rms voltmeter reads 490 ± 10 mVrms.
6. Vary the "M06" bus data until the voltage to pin (39) of IC3001.
7. Becomes the value as stated below.

SETTING VOLTAGE

ADJ spec : 490 ± 10 mVrms

CHK spec: 490 ± 20 mVrms

MTS VCO Adjustment

1. Keep the unit in no-signal state.
2. Connect the frequency counter to pin (39) of IC3001.
3. Connect a capacitor (100 μ F, 50V) in between positive(+) side of C3005 and ground.
4. Enter the service mode and select the service adjustment "M02"
5. Adjust the data so that the frequency counter reads 62.94 ± 0.75 kHz.

Filter Adjustment

1. Feed the following stereo pilot signal to pin (14) of IC3001 .
Stereo pilot signal: 9.4kHz, 600mVrms.
2. Enter the service mode and select the service adjustment "M03".
3. Adjust the data until "OK" appears in position on the screen. Make sure the "OK" is displayed almost at the center of the data range.

Separation Adjustment

1. Connect the rms voltmeter to pin (39) of IC3001.
2. Receive the following composite stereo signal 1.
Composite stereo signal: 30% modulation, left channel only, noise reduction on, 300Hz
3. Enter the service mode and select the service adjustment "M04".
4. Adjust the data until the AC voltage reading of the RMS voltmeter is minimum.
5. Receive the following composite stereo signal 2.
Stereo signal: 30% modulation, left channel only, noise reduction on, 3kHz
6. Enter the service mode and select the service adjustment "M05".
7. Adjust the data until the AC voltage reading of the rms voltmeter is minimum.
8. Take the above steps 1 thru 7 again for fine adjustment.
SIGNAL 1: 300Hz, 30% modulation, Lch only, NR-ON
SIGNAL 2: 3kHz, 30% modulation, Lch only, NR-ON
Check the output of the speaker at the maximum volume as stated below.

Confirmation spec:

ADJ spec: above 25 dB

CHK spec: above 20 dB

■ P-IN-P ADJUSTMENT

P-IN-P Y-LEVEL Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "P01".
3. Adjust "P01" data value to obtain normal contrast level.

P-IN-P TINT Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "P02".
3. Adjust data value to "29".

P-IN-P COLOR Adjustment

1. Receive a good local channel.
2. Make sure the customer color control is set to center position.
3. Enter the service mode and select the service adjustment "P03".
4. Adjust "P03" data value to obtain normal color level.

P-IN-P Y-OFF SET Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "P04".
3. Adjust data value to "09".

P-IN-P H-POSITION Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "P05".
3. Adjust data value to "0A".

P-IN-P BURST GATE PULSE (for MAIN)

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "P06".
3. Adjust data value to "00".


P-IN-P FREERUN

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "P07".
3. Adjust data value to "0B".

P-IN-P TINT-INPUT Adjustment

1. Receive the composite signal.
2. Enter the service mode and select the service adjustment "P08".
3. Adjust data value to "24".

MODEL CHASSIS LAYOUT

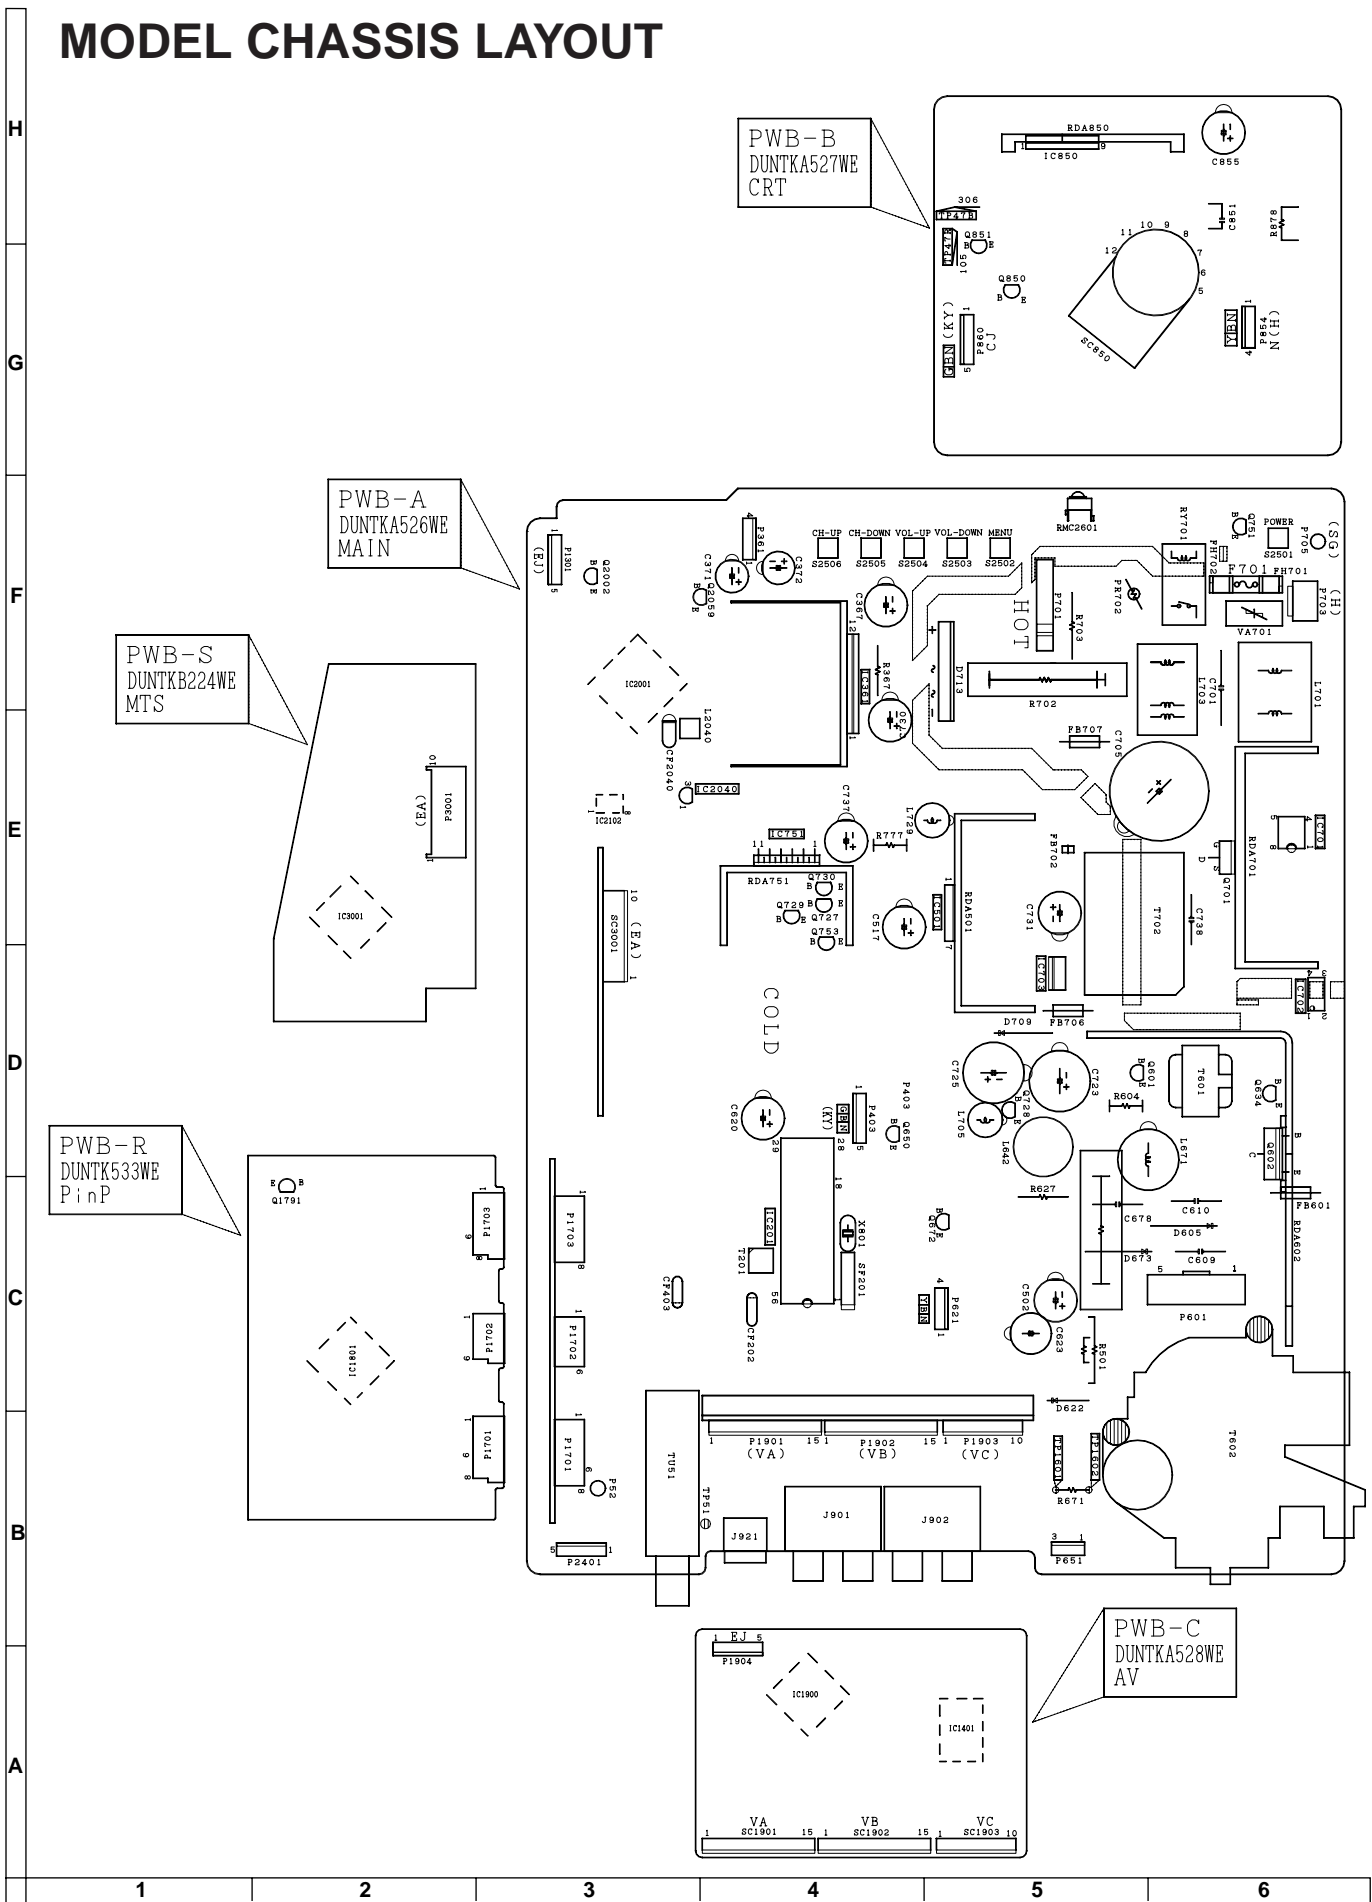

DESCRIPTION OF SCHEMATIC DIAGRAM

NOTES:

1. The unit of resistance "ohm" is omitted.
($K=k\Omega=1000\Omega$, $M=M\Omega$)
2. All resistors are 1/16 watt, unless otherwise noted.
3. All capacitors are μF , unless otherwise noted.
($P=pF=\mu\mu F$)
4. (G) indicates $\pm 2\%$ tolerance may be used.
5. \ddagger indicates line isolated ground.

VOLTAGE MEASUREMENT CONDITIONS:

1. All DC voltages are measured with DVM connected between points indicated and chassis ground, line voltage set at 120V AC and all controls set for normal picture unless otherwise indicated.
2. All voltages measured with 1000 μ V B & W or Color signal.

WAVEFORM MEASUREMENT CONDITIONS:


1. Photographs taken on a standard gated color bar signal, the tint setting adjusted for proper color. The wave shapes at the red, green and blue cathodes of the picture tube depend on the tint, color level and picture control.
2. \odot indicates waveform check points (See chart, waveforms are measured from point indicated to chassis ground.)

\triangle AND SHADED () COMPONENTS = SAFETY RELATED PARTS.

\blacktriangle MARK= X-RAY RELATED PARTS.

This circuit diagram is a standard one, printed circuits may be subject to change for product improvement without prior notice.


WAVEFORMS

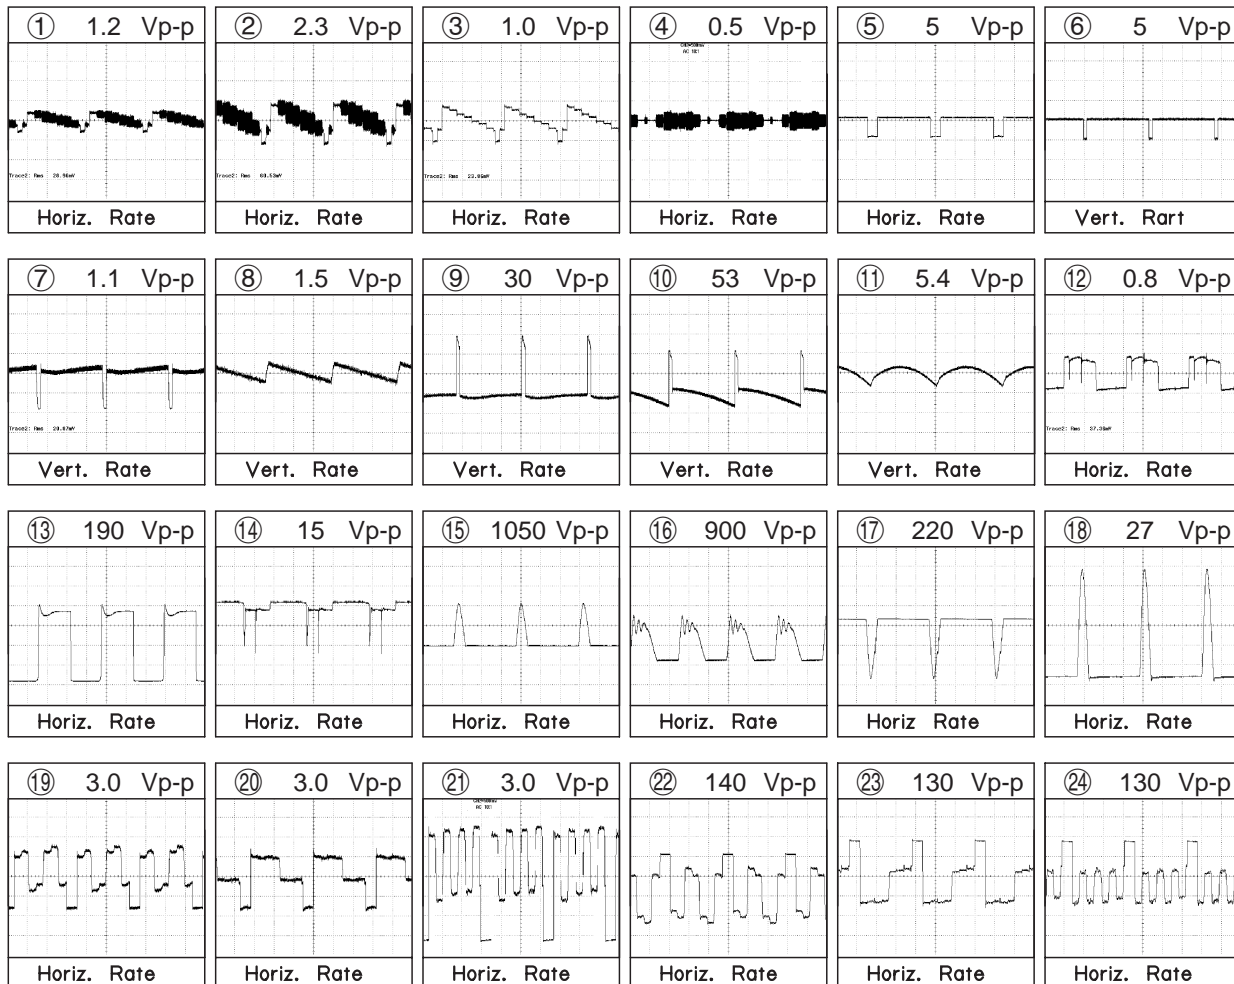

MODEL SCHEMATIC DIAGRAM: MAIN-1 Unit

MAIN1


NOTE: 1. THE UNIT OF RESISTANCE "OHM" IS OMITTED
(K=1000 OHMS, M=MEG OHMS)
2. ALL RESISTORS ARE 1/16 WATT UNLESS OTHERWISE NOTED.
3. UNIT OF ALL CAPACITORS ARE F WITH PREFIX SYMBOL
(E.g., P, ETC.)

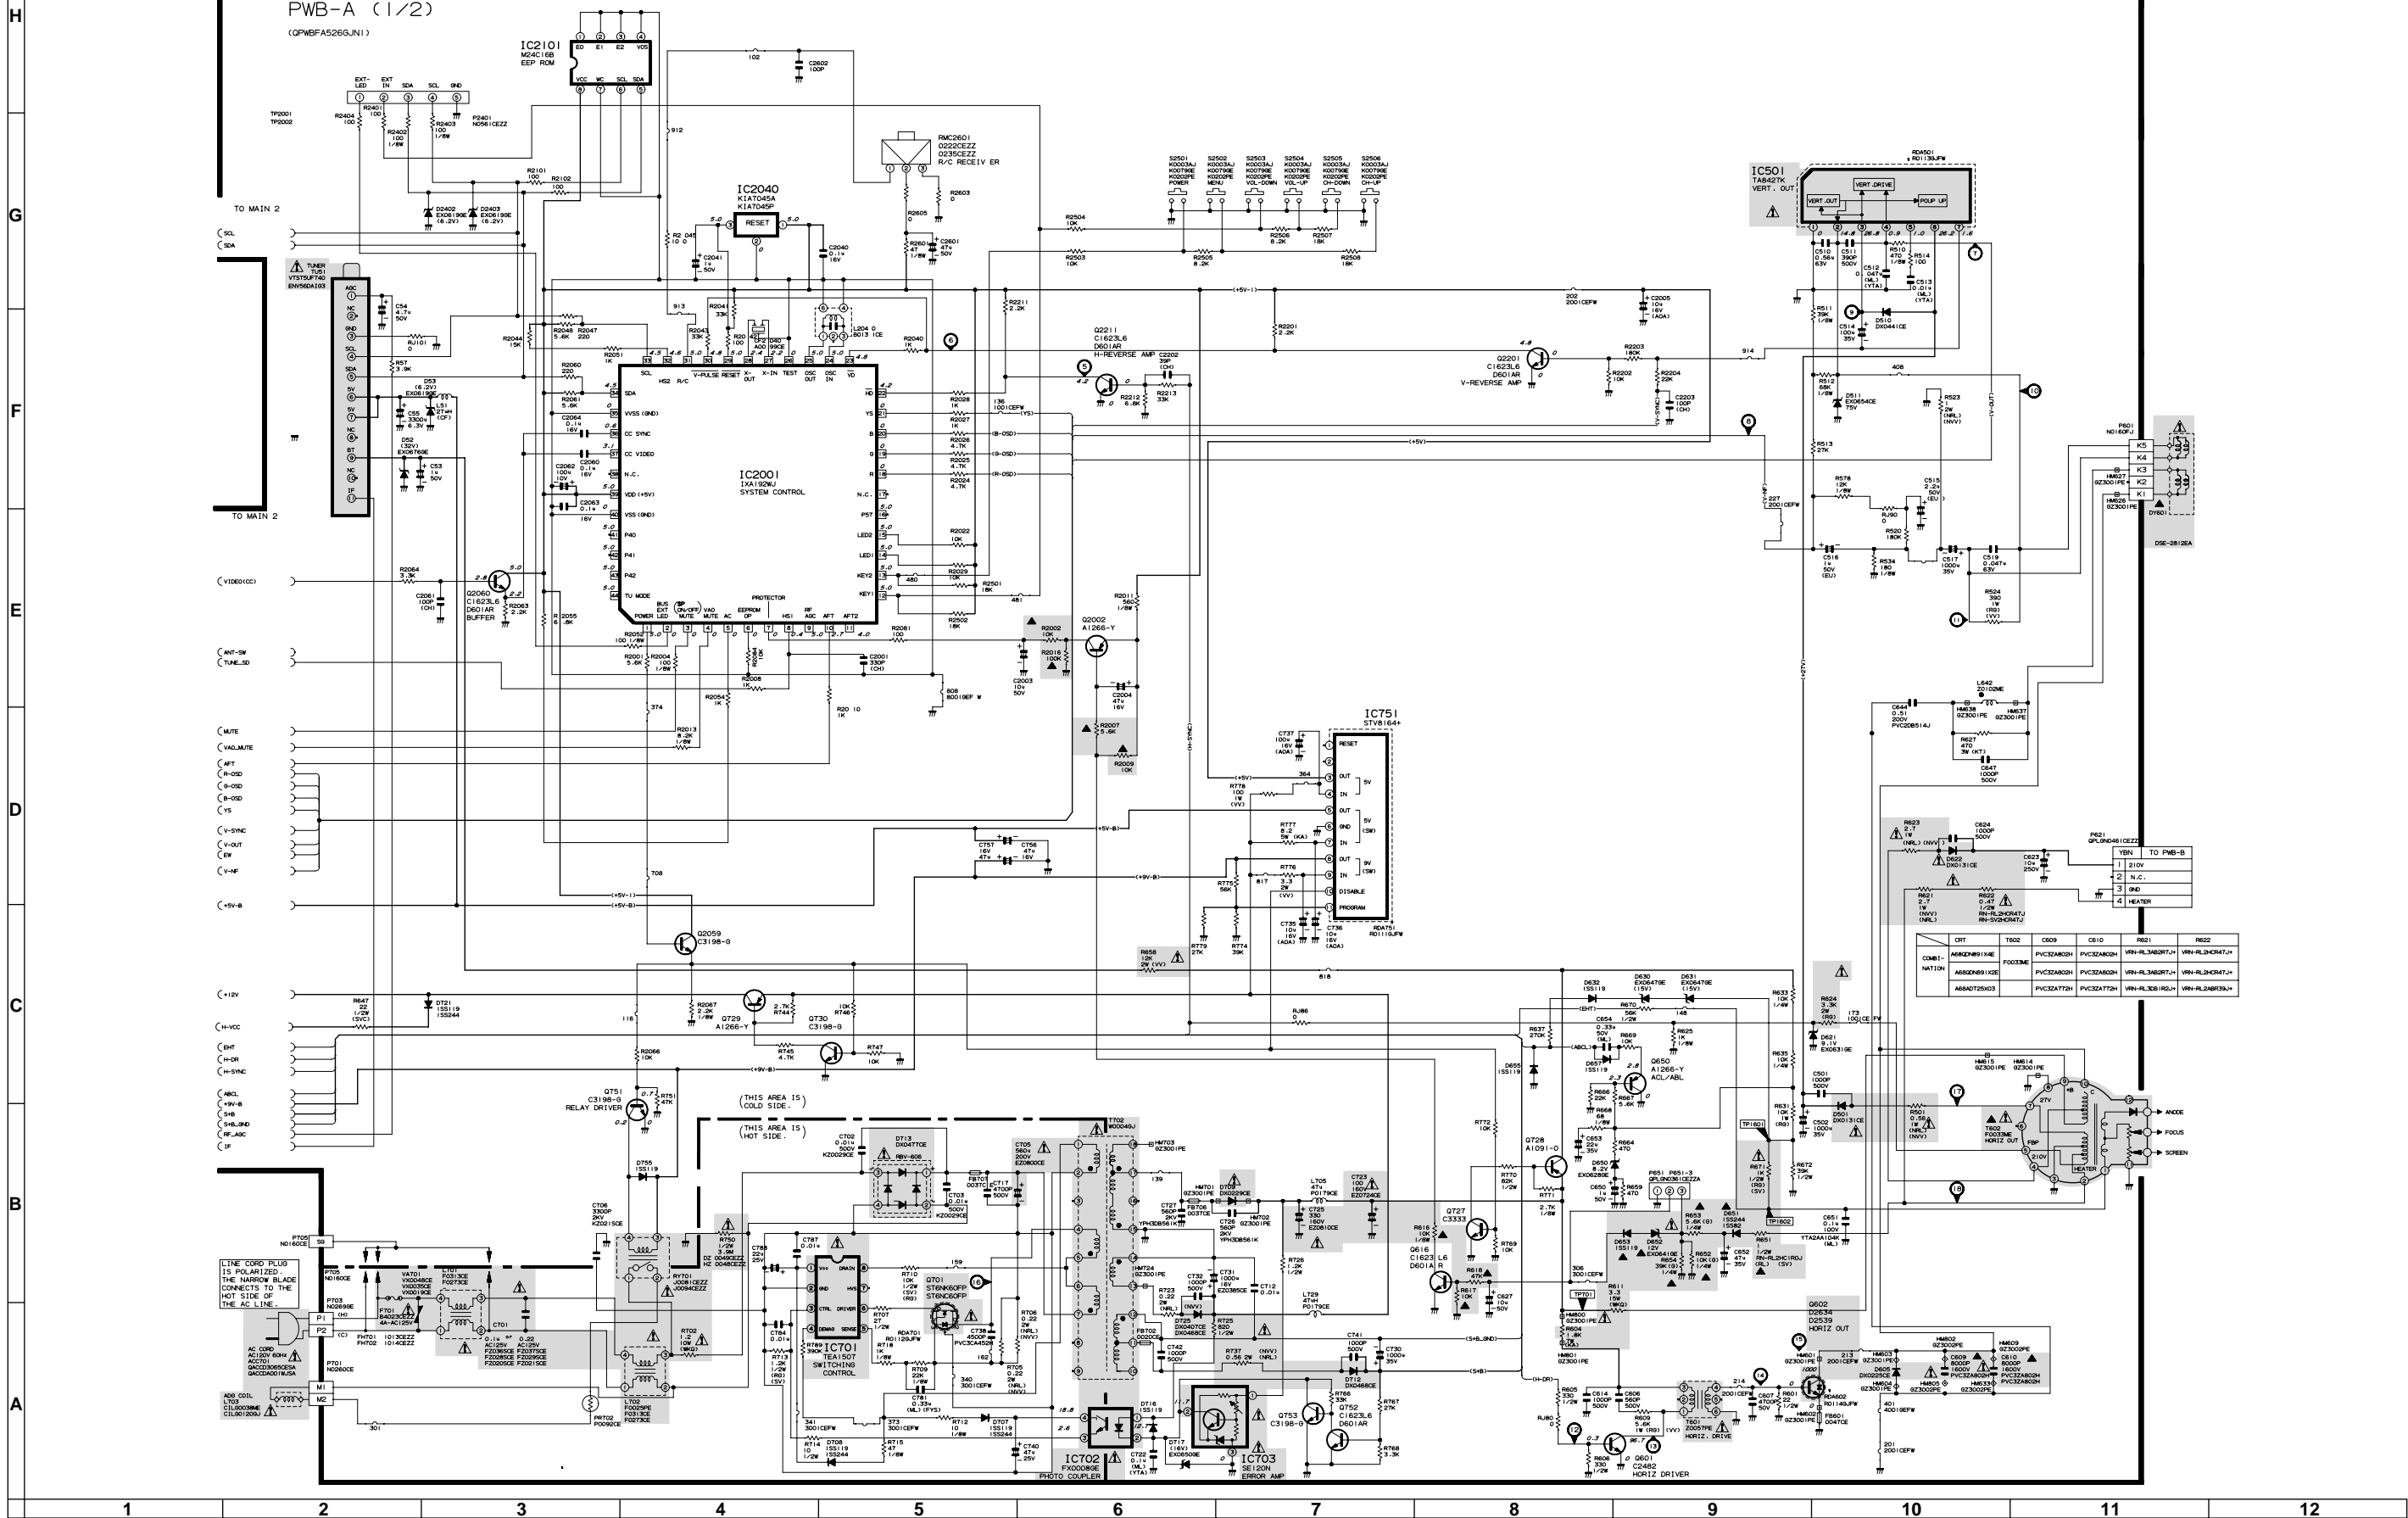


MODEL SCHEMATIC DIAGRAM: MAIN-2 Unit

MAIN2

NOTE: 1. THE UNIT OF RESISTANCE "OHM" IS OMITTED
 (K= 1000 OHM, M=10000 OHM)
 2. ALL RESISTORS ARE 1/16 WATT UNLESS OTHERWISE NOTED.
 3. UNIT OF ALL CAPACITORS ARE P. WITH PREFIX SYMBOL
 (u, p, etc.).

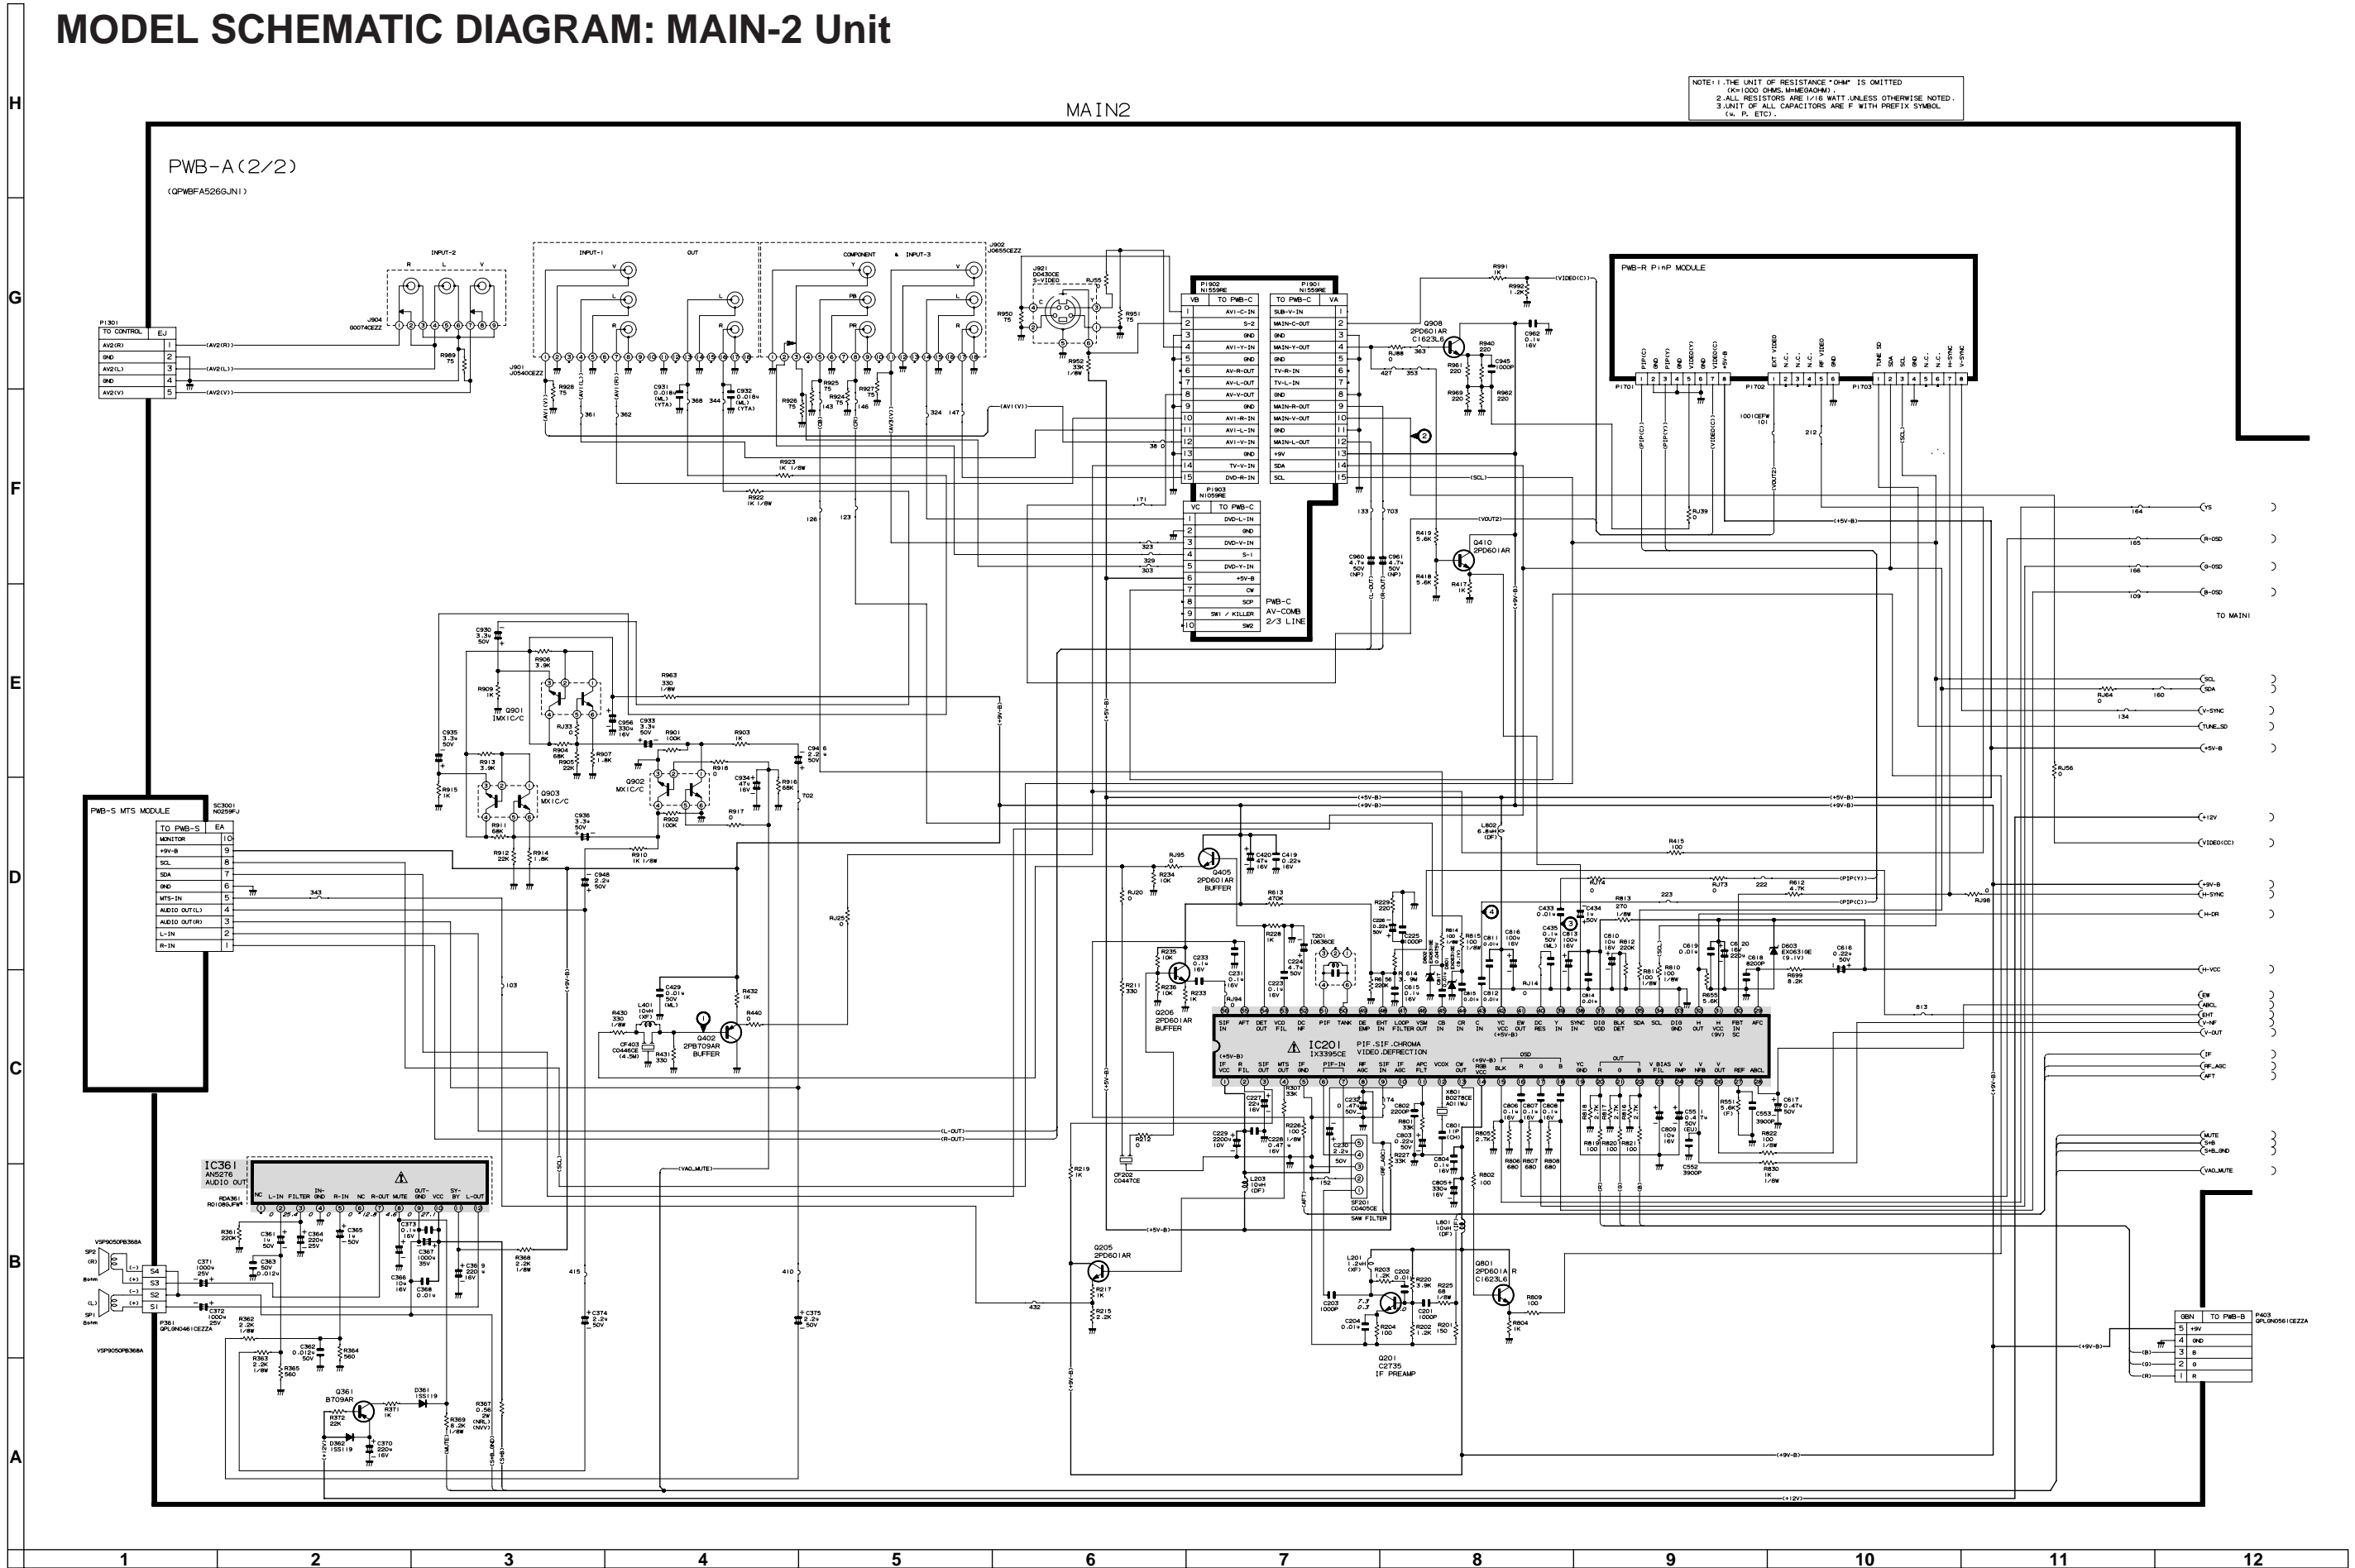


MODEL SCHEMATIC DIAGRAM: CRT Unit

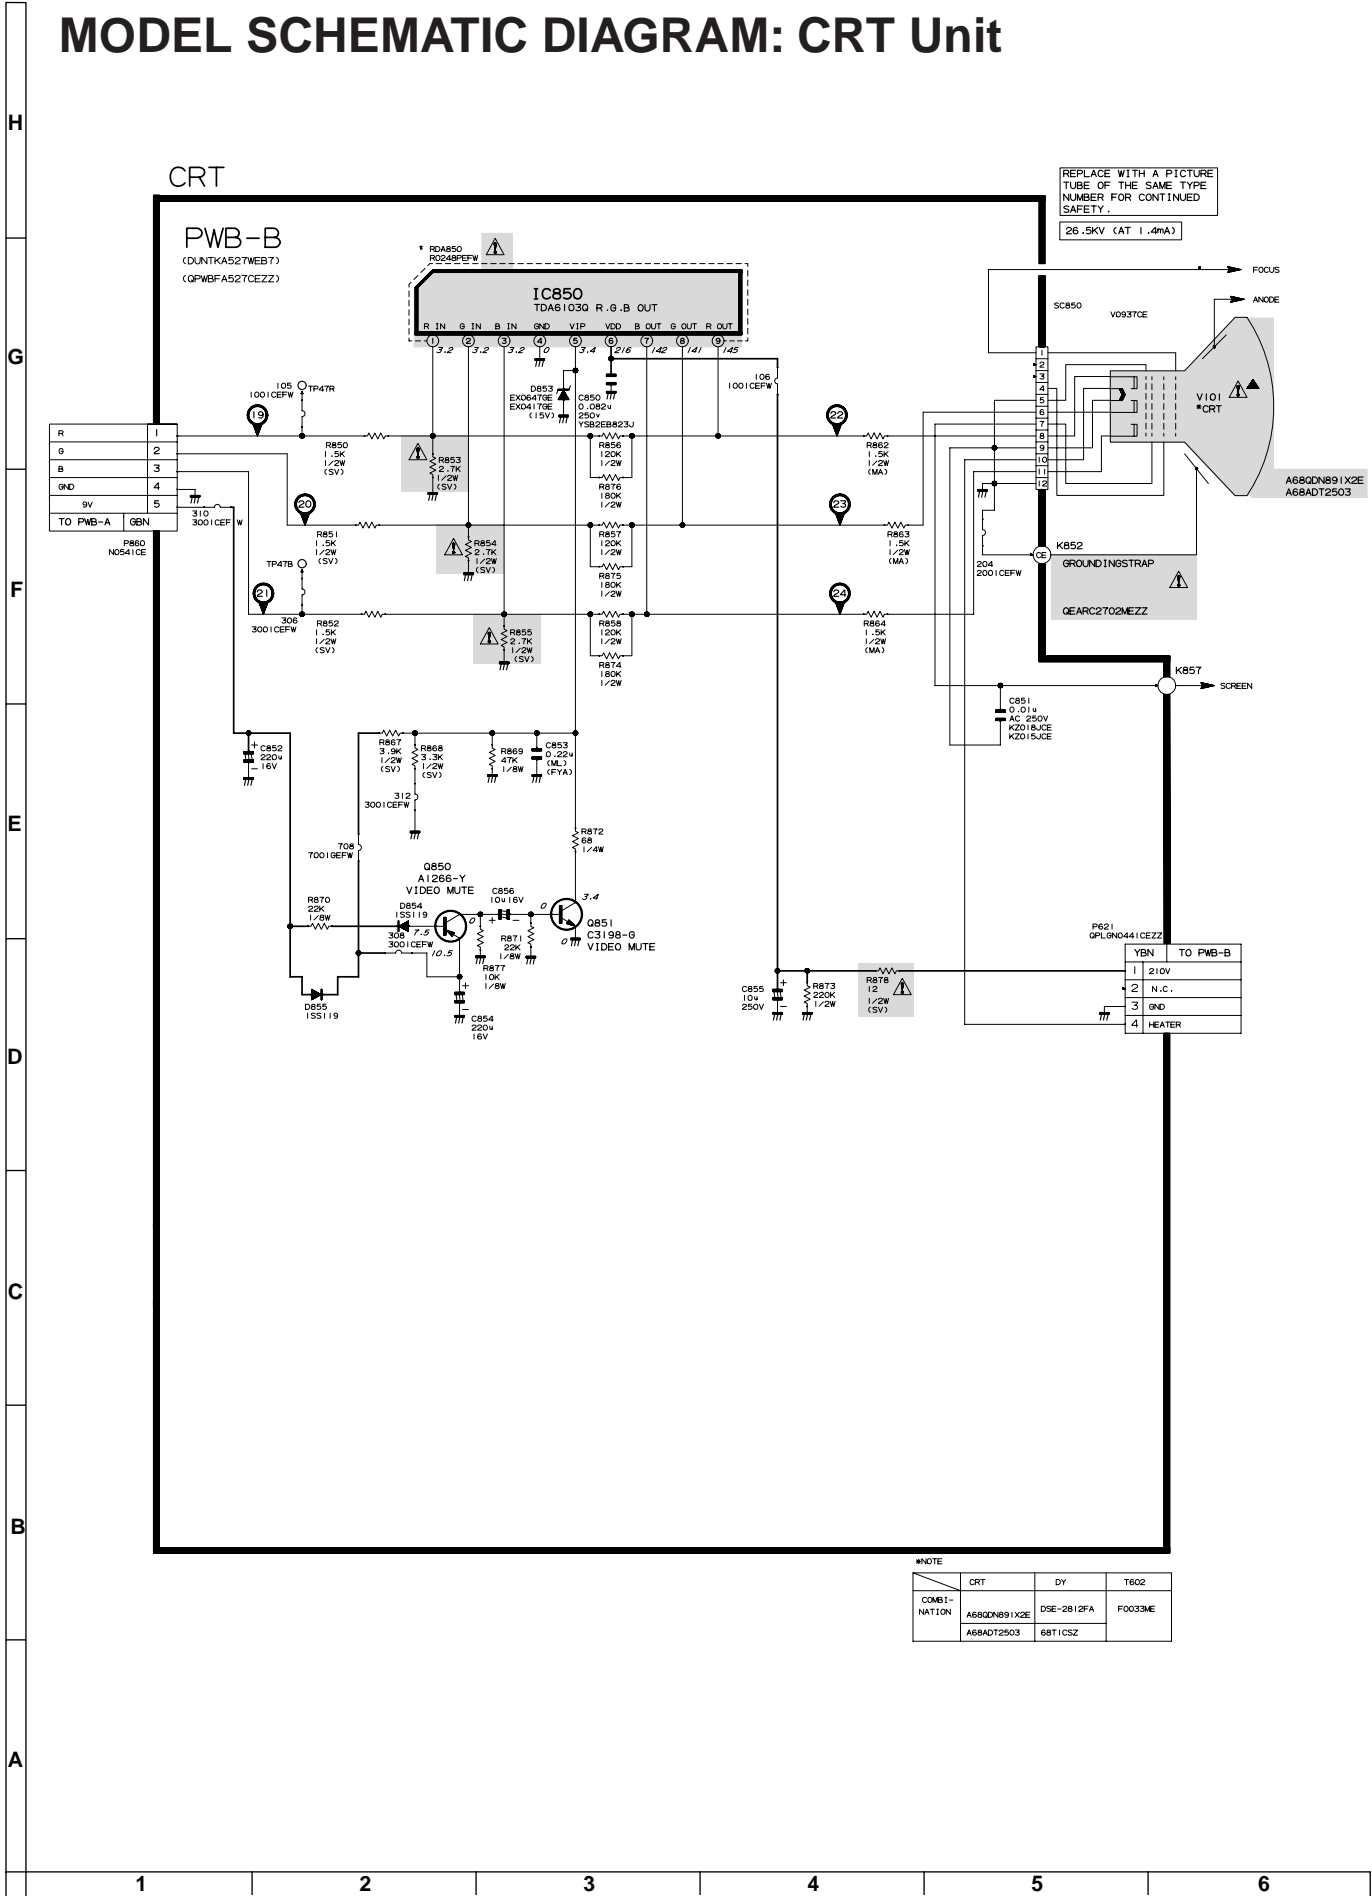

MODEL SCHEMATIC DIAGRAM: AV Unit

AV-COMB (2 LINE)

NOTE: 1. THE UNIT OF RESISTANCE "OHM" IS OMITTED (K=1000 OHMS, M=MEGAOHM).
 2. ALL RESISTORS ARE 1/16 WATT UNLESS OTHERWISE NOTED.
 3. UNIT OF ALL CAPACITORS ARE F WITH PREFIX SYMBOL (u, P, ETC).

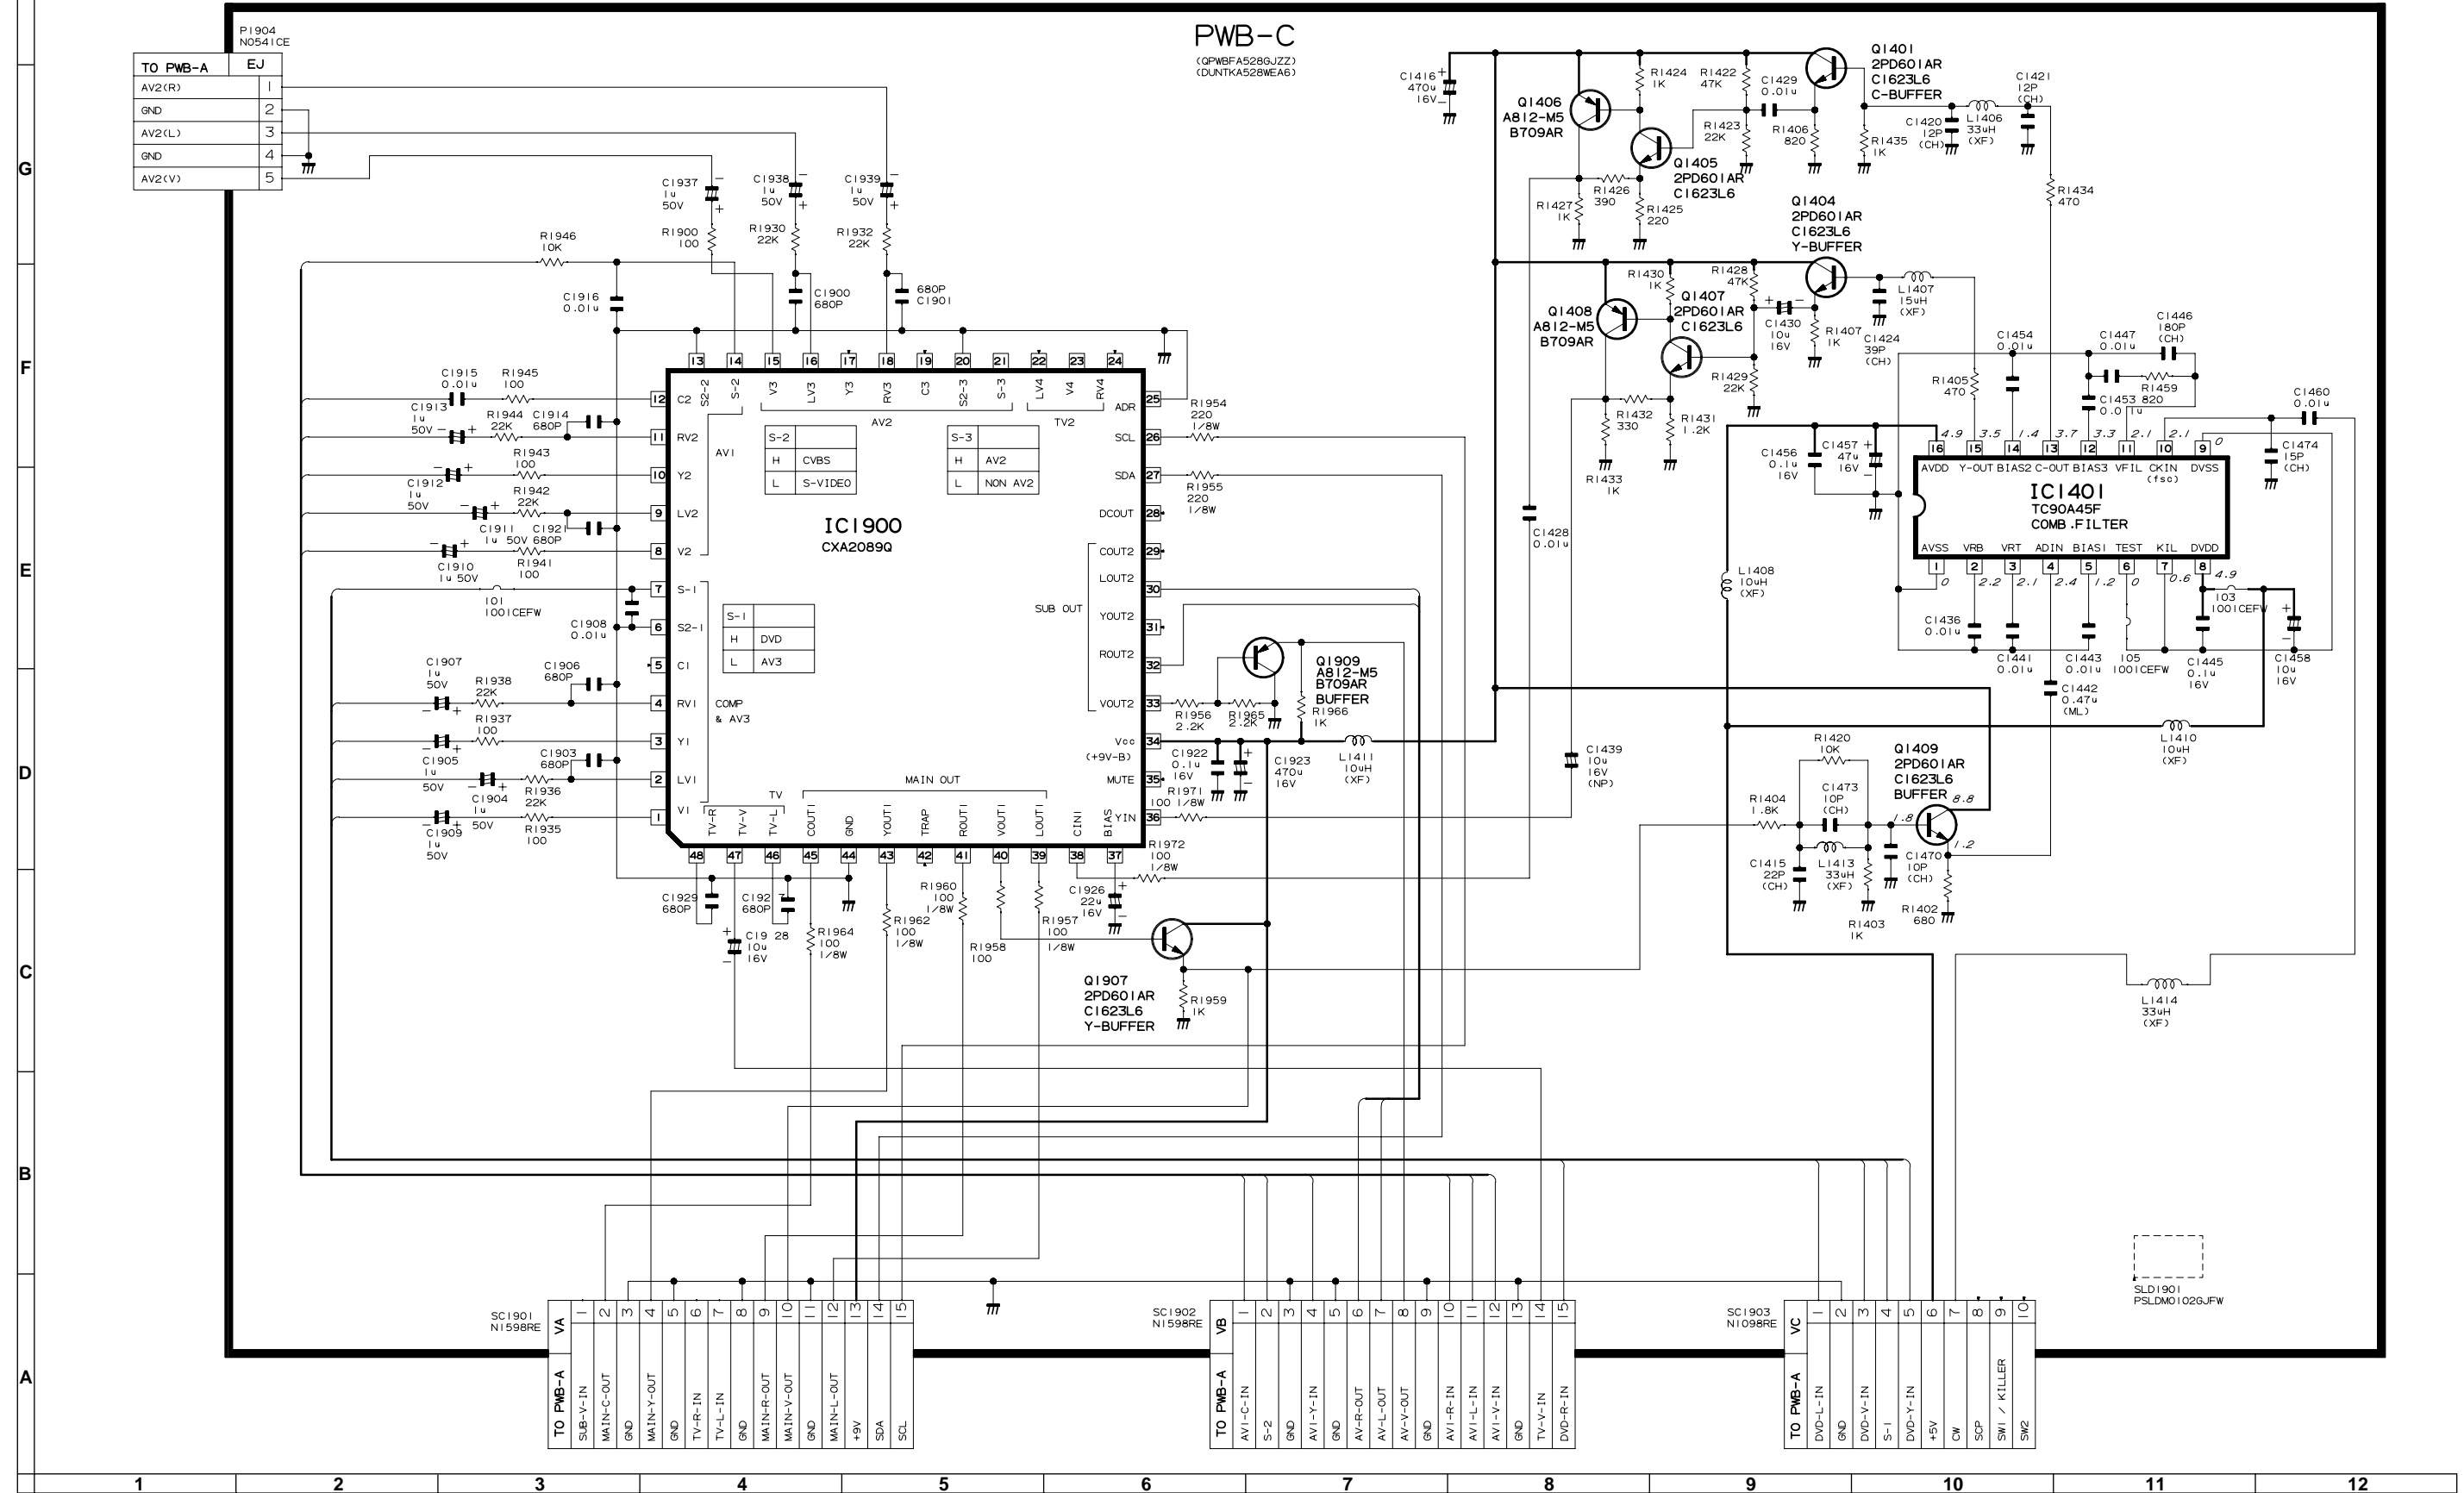


SCHEMATIC DIAGRAM: P-IN-P Unit

NOTE: 1. THE UNIT OF RESISTANCE "OHM" IS OMITTED
(K=1000 OHMS, M=MEGAOHM).
2. ALL RESISTORS ARE 1/16 WATT UNLESS OTHERWISE NOTED.
3. UNIT OF ALL CAPACITORS ARE F WITH PREFIX SYMBOL
(u, P, ETC).

NOTE: ALL DIODES ARE * 1SS119 * UNLESS OTHERWISE SPECIFIED.
* 1N4148 * OR * 2SD601AR * UNLESS OTHERWISE SPECIFIED.

P IN P

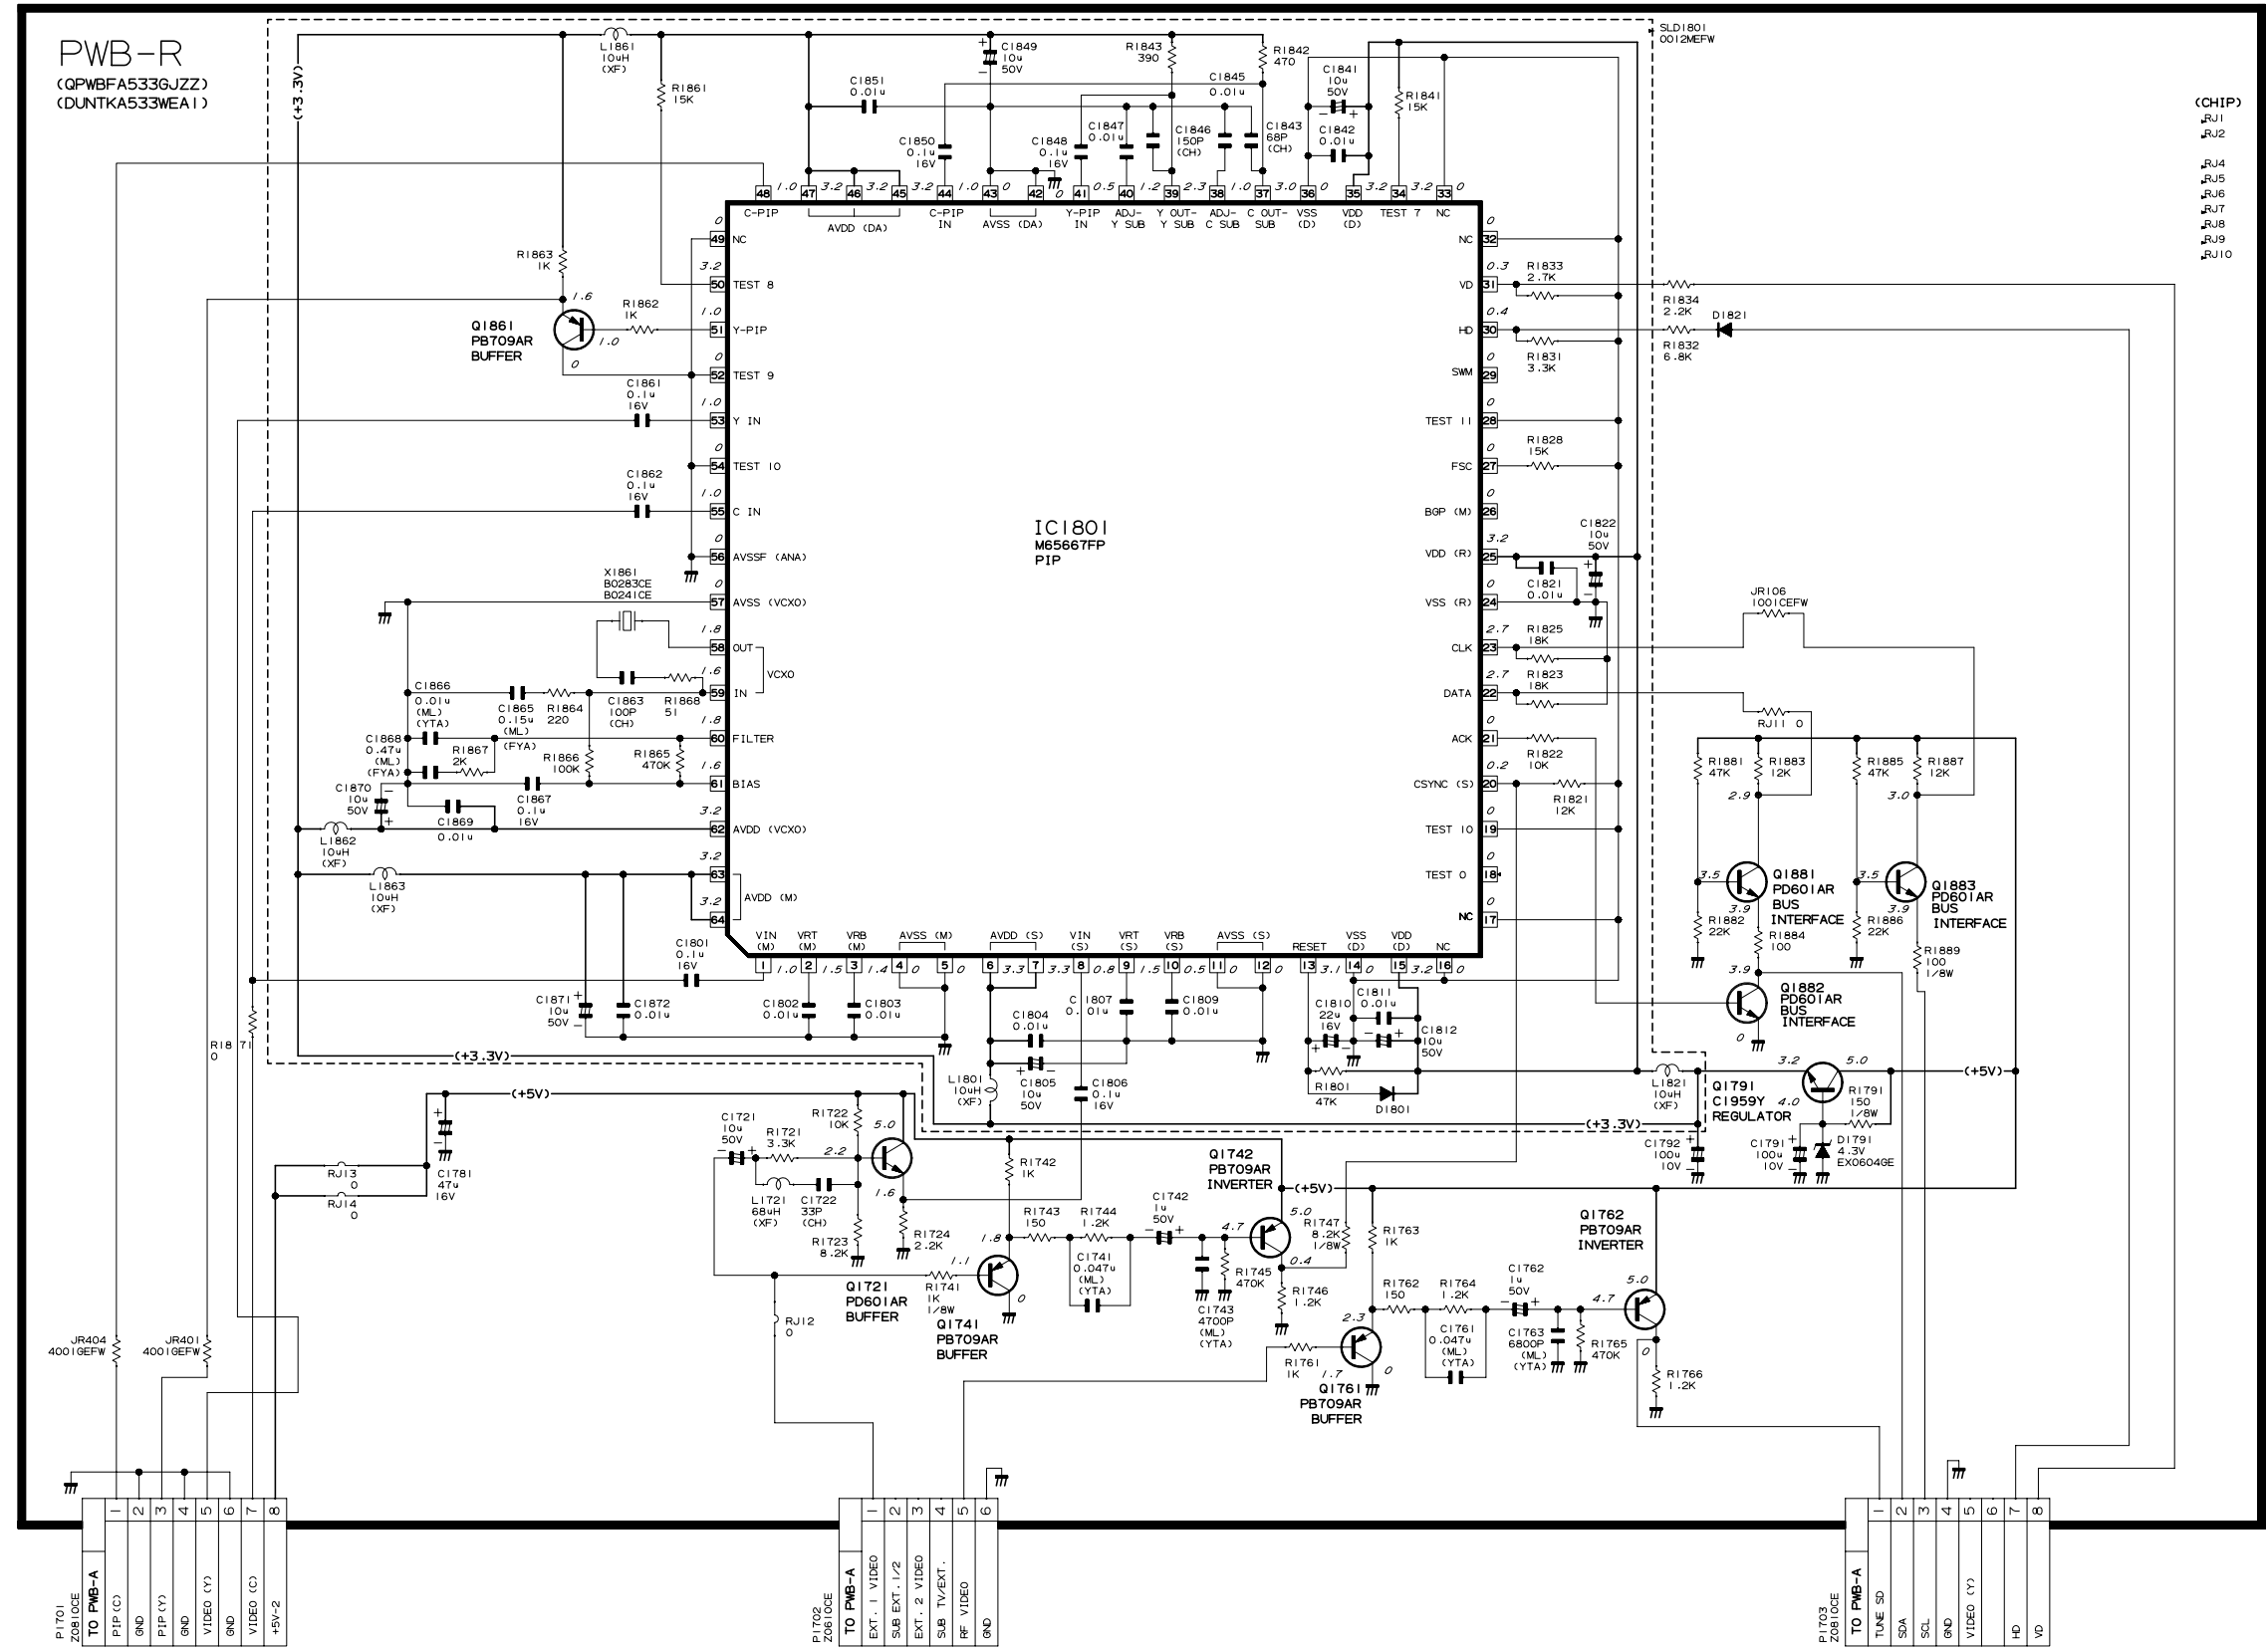


(CHIP)
JR1
JR2
JR4
JR5
JR6
JR7
JR8
JR9
JR10

H
G
F
E
D
C
B
A

1 2 3 4 5 6 7 8 9 10 11 12

MODEL SCHEMATIC DIAGRAM: MTS MODULE Unit

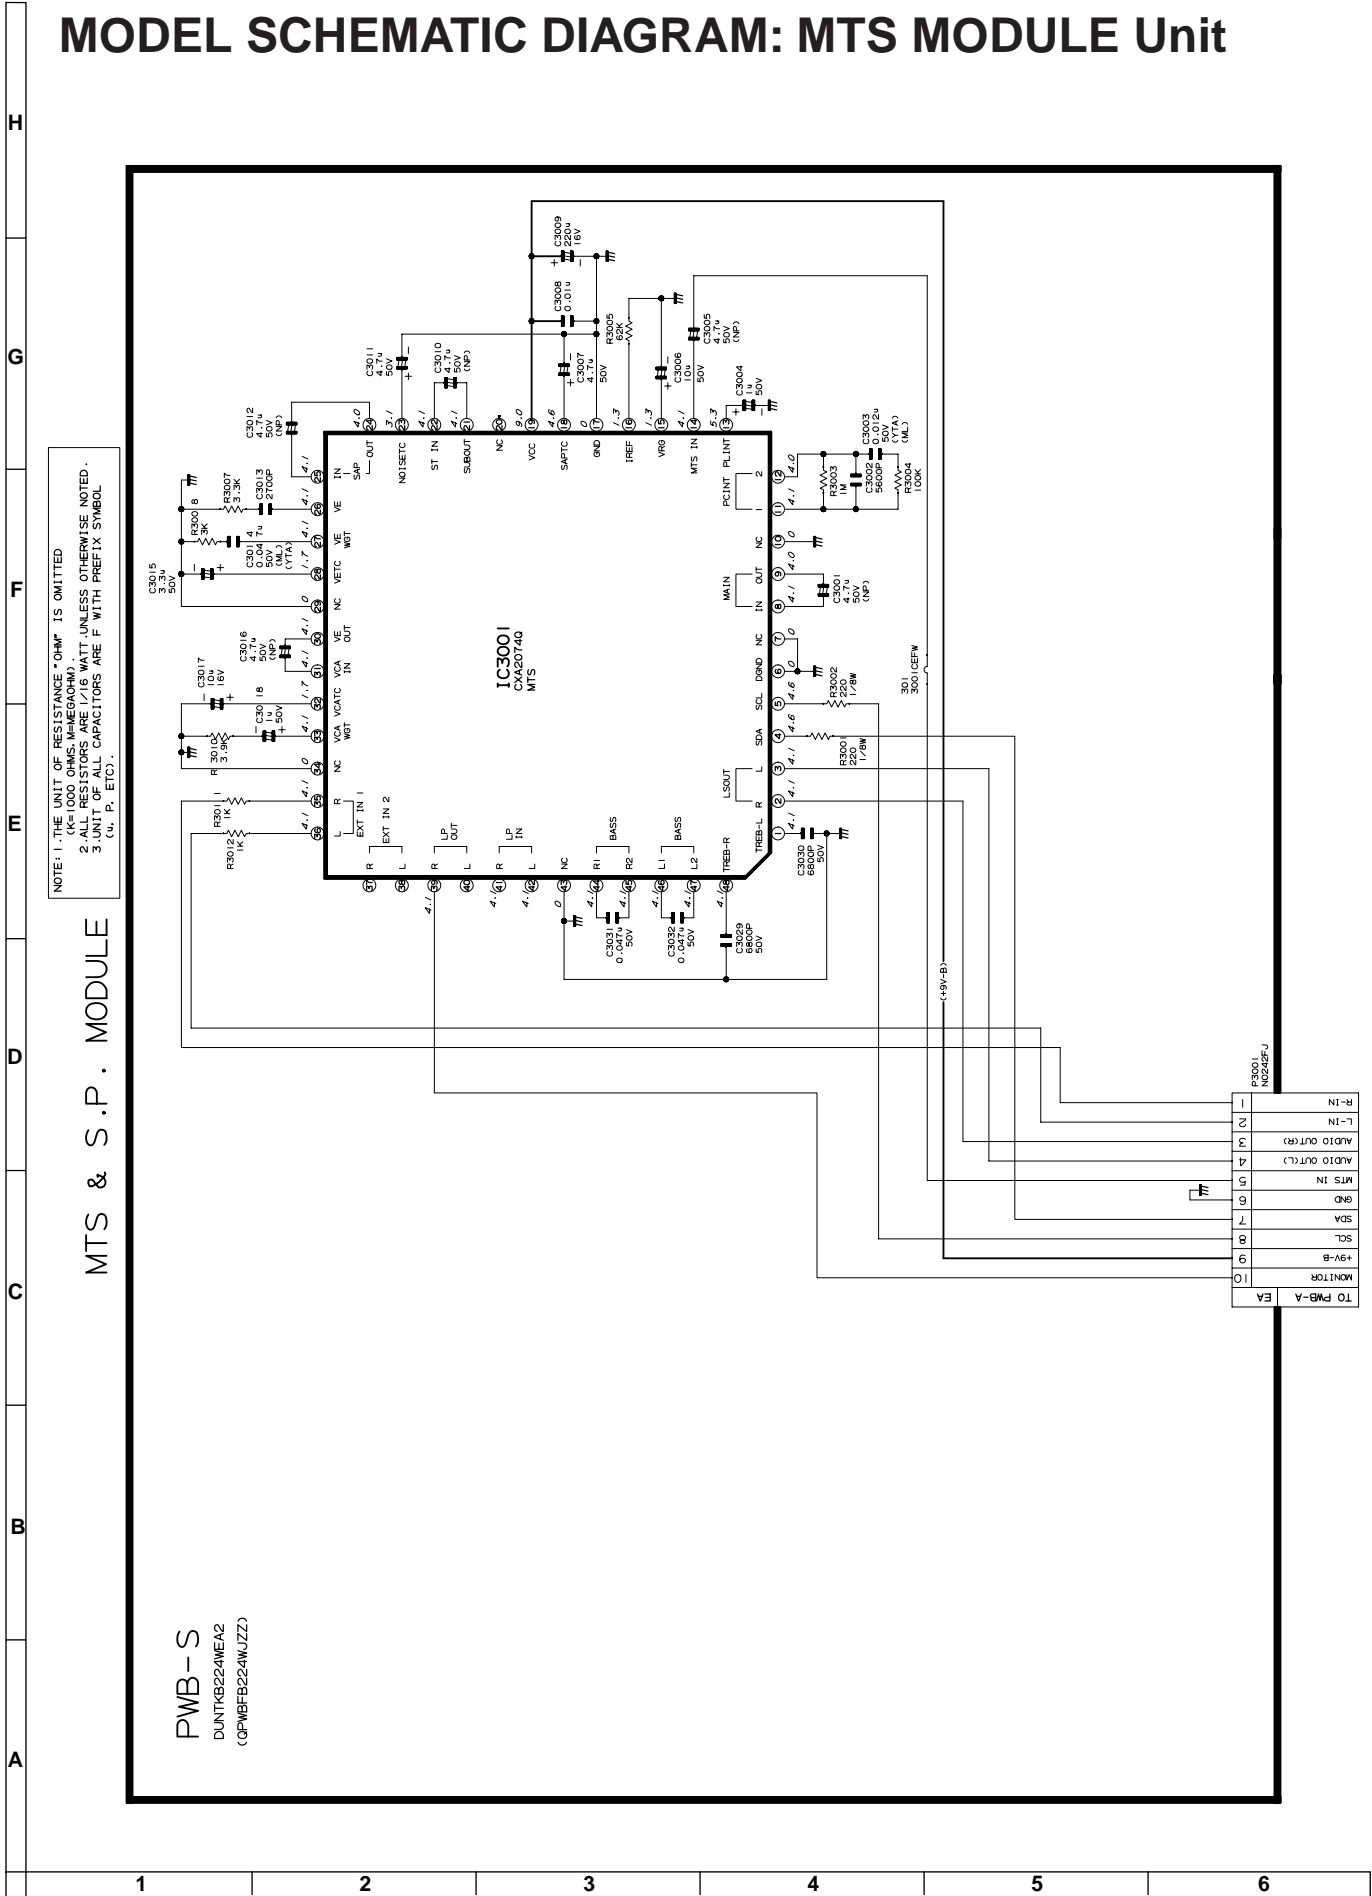

NOTE: 1. THE UNIT OF RESISTANCE OHM IS OMITTED.
 2. ALL RESISTORS ARE 1/16 WATT UNLESS OTHERWISE NOTED.
 3. UNIT OF ALL CAPACITORS ARE F WITH PREFIX SYMBOL (C, P, ETC.).


MTS & S.P. MODULE

PWB-S
 DUNTGB224ME42
 (OPWBFB224WJZZ)


H
G
F
E
D
C
B
A

1 2 3 4 5 6

PRINTED WIRING BOARD ASSEMBLIES

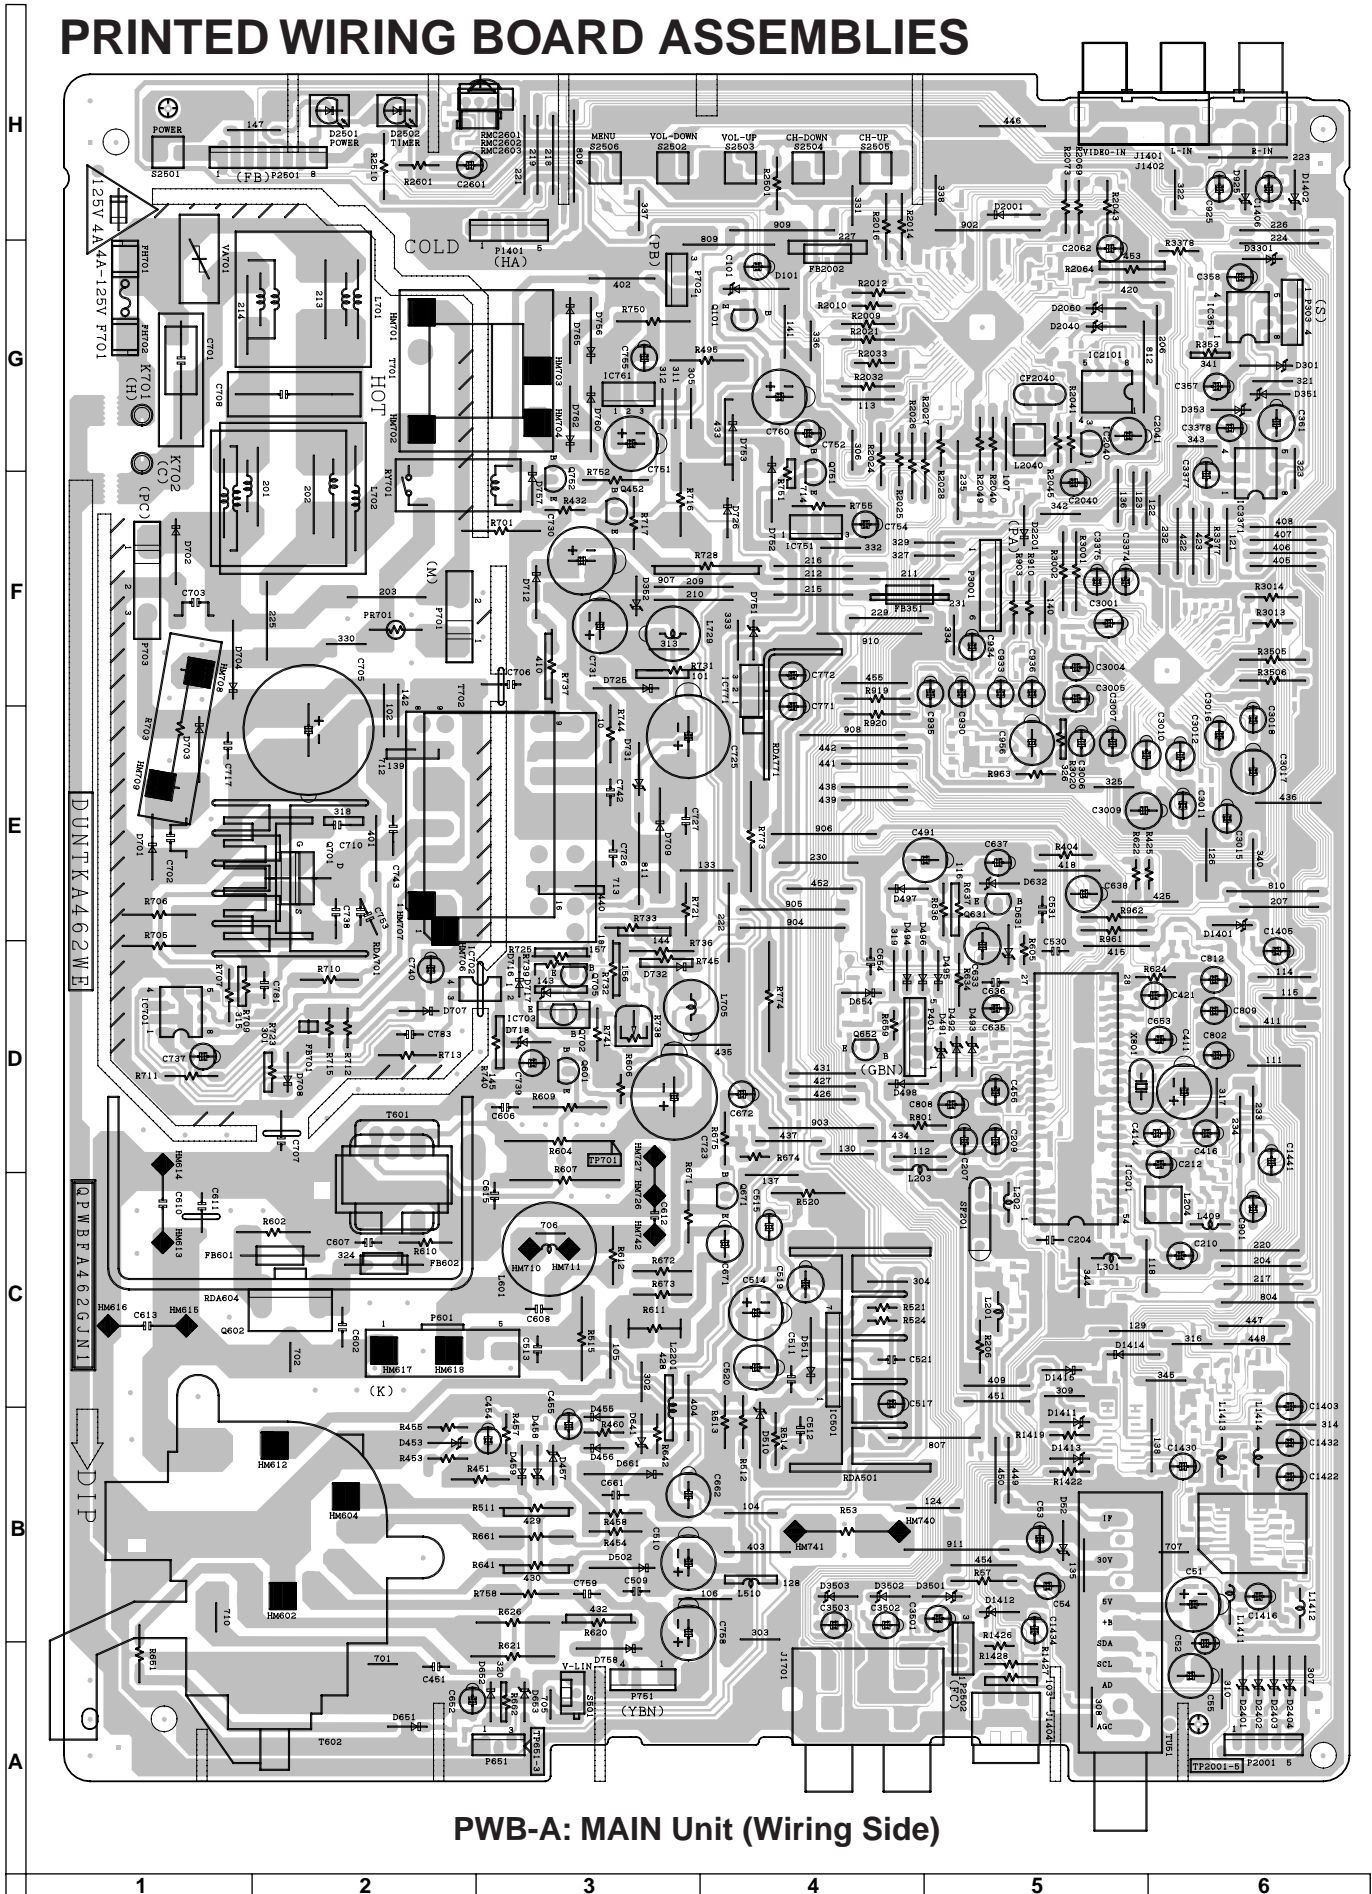


PWB-A: MAIN Unit (Wiring Side)

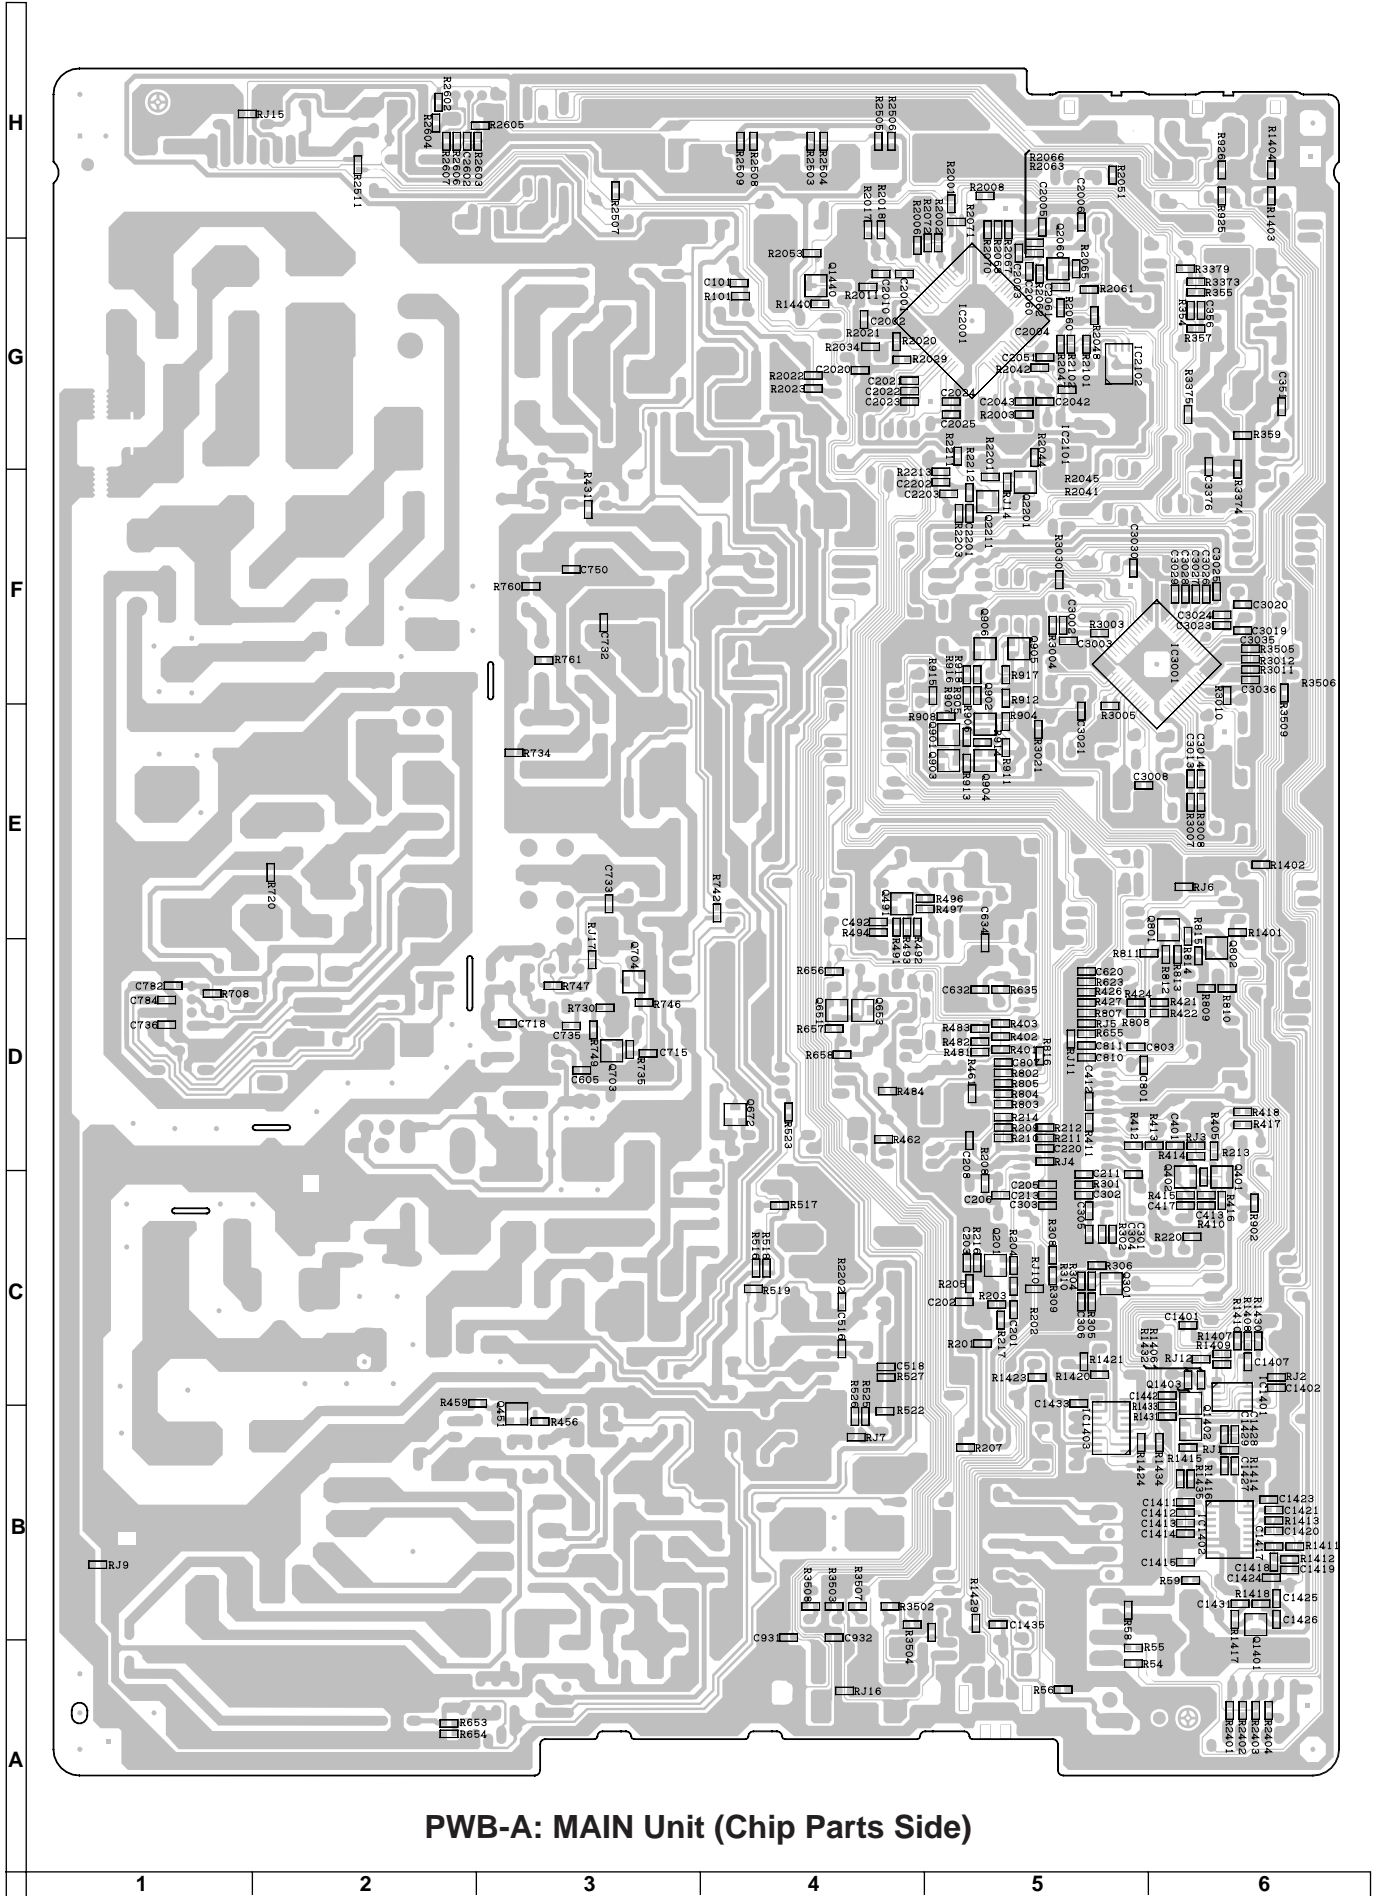


PWB-A: MAIN Unit (Chip Parts Side)

H
G
F
E
D
C
B
A

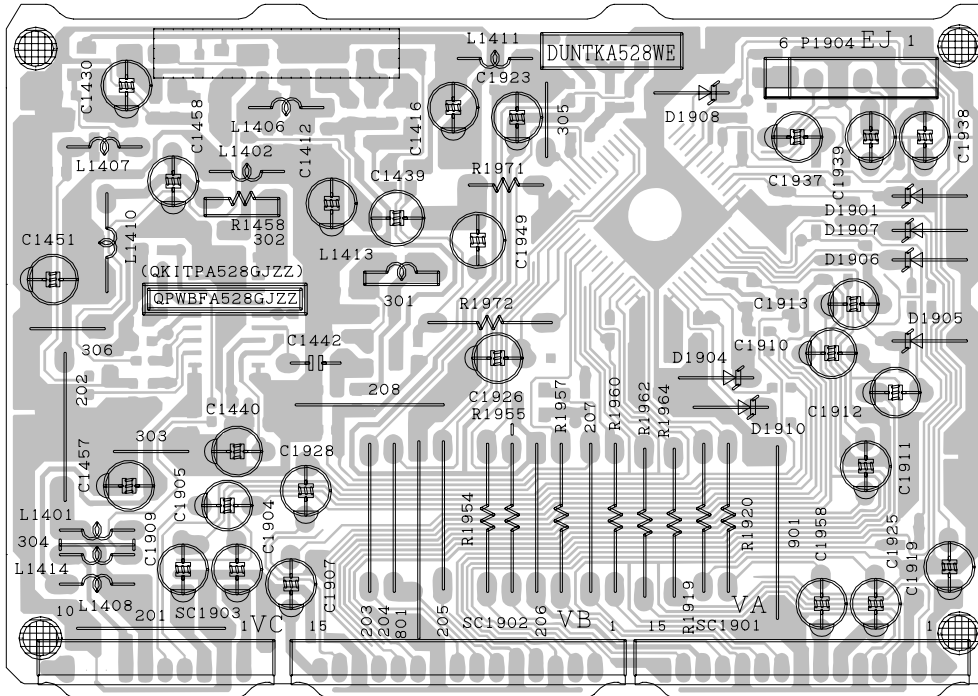

PWB-C: AV Unit (Wiring Side)

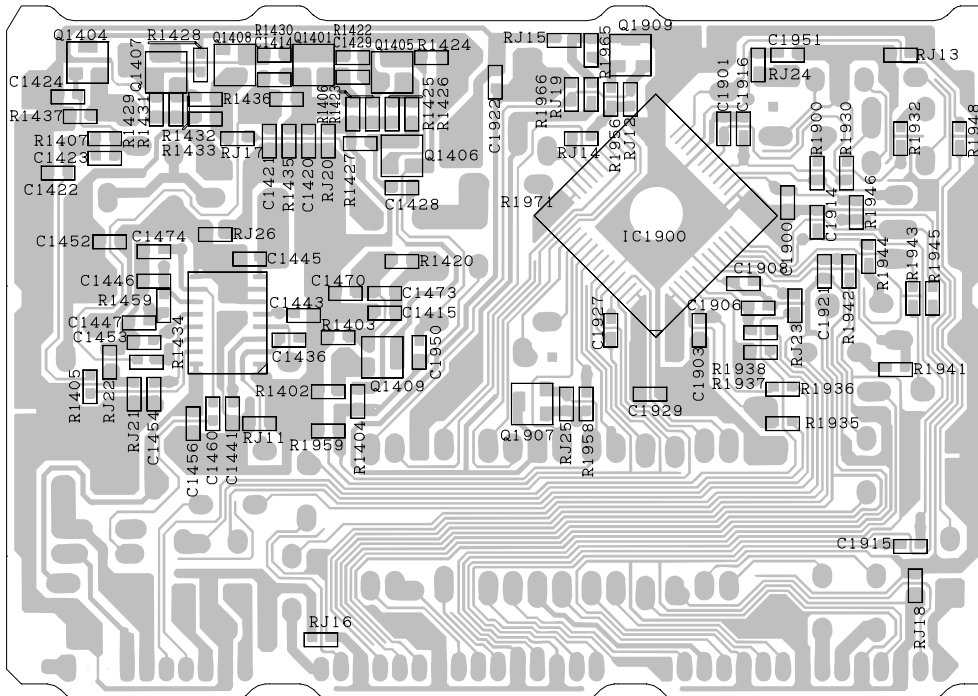


PWB-C: AV Unit (Chip parts Side)


1 2 3 4 5 6

H
G
F
E
D
C
B
A

1 2 3 4 5 6

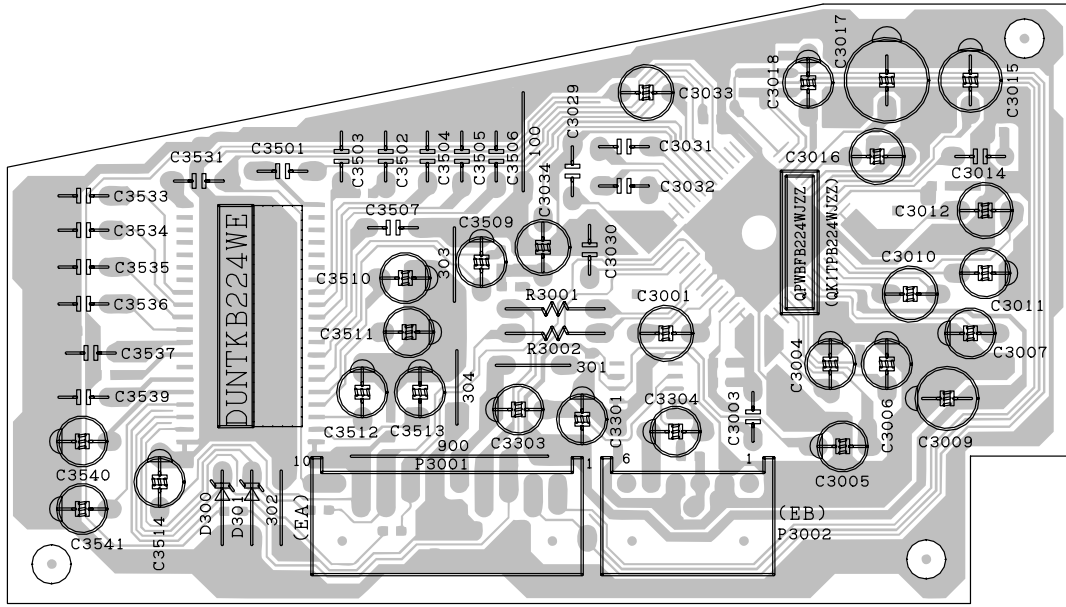


PWB-S: MTS MODULE Unit (Wiring Side)

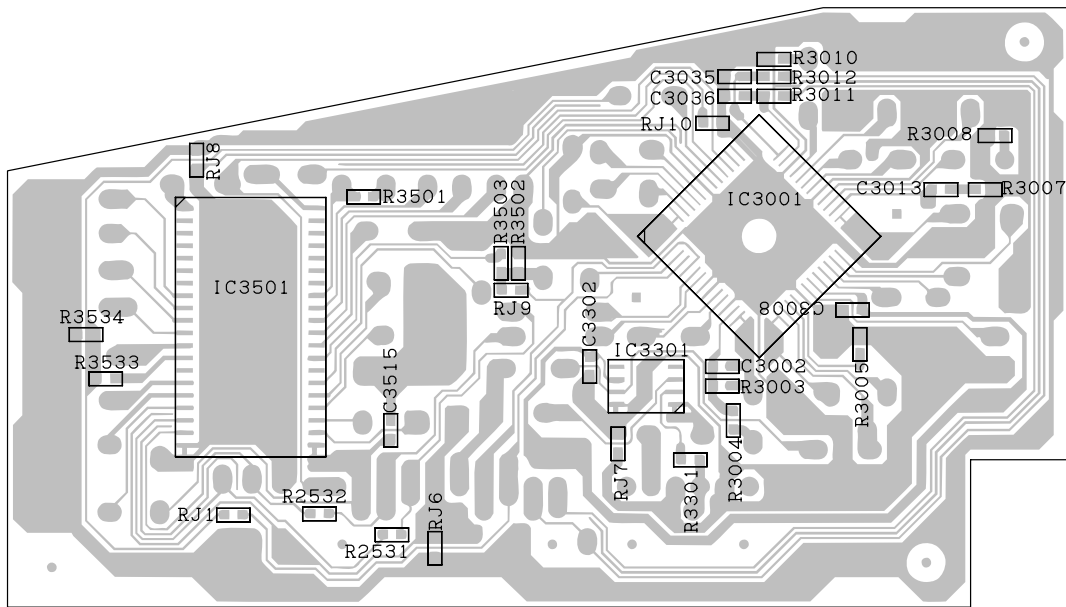

PWB-S: MTS MODULE Unit (Chip Parts Side)

H
G
F
E
D
C
B
A

1 2 3 4 5 6

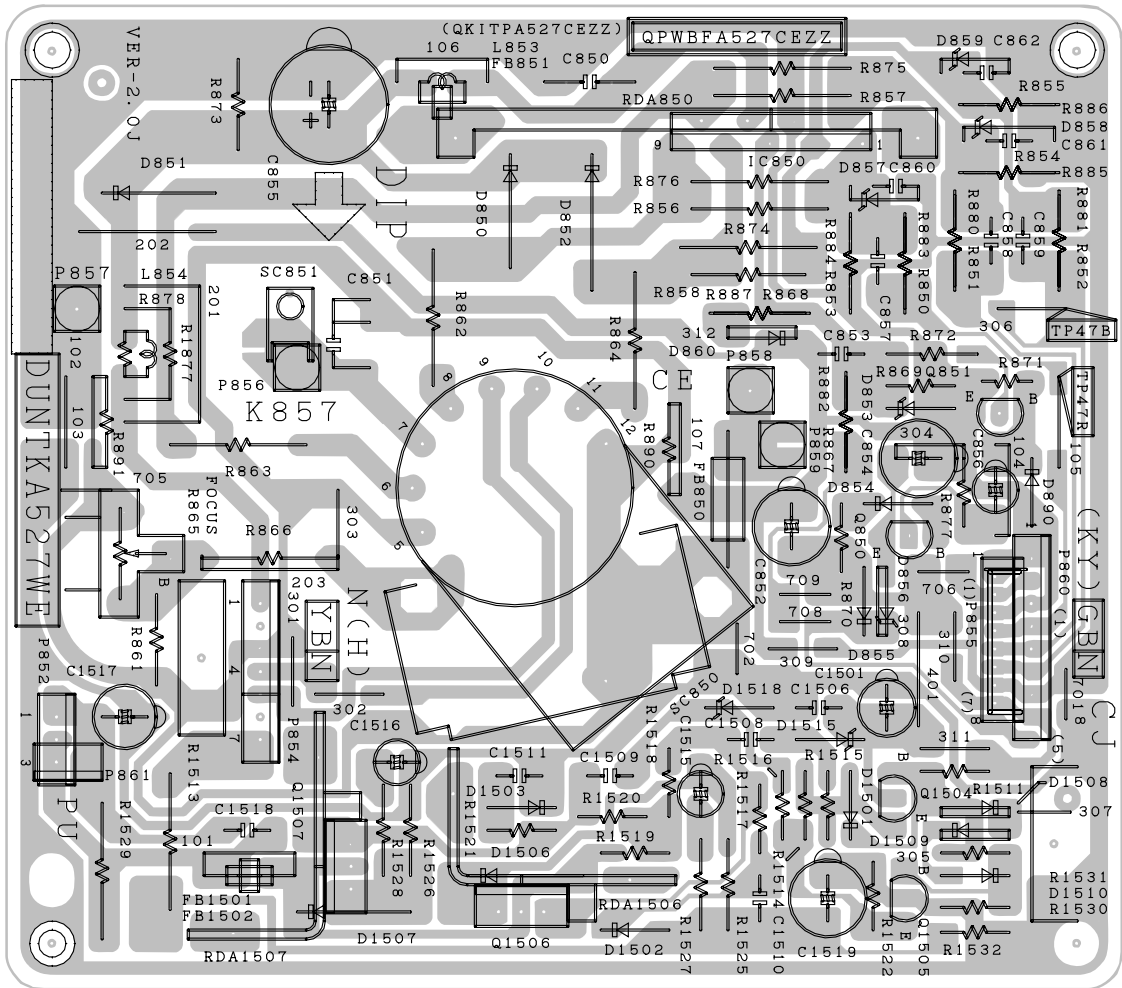

PWB-B: CRT Unit (Wiring Side)

PARTS LIST

PARTS REPLACEMENT

Replacement parts which have these special safety characteristics identified in this manual ; electrical components having such features are identified by Δ and shaded areas in the Replacement Parts Lists and Schematic Diagrams. The use of a substitute replacement part which does not have the same safety characteristic as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

"HOW TO ORDER REPLACEMENT PARTS"

To have your order filled promptly and correctly, please furnish the following informations.

- | | |
|-----------------|----------------|
| 1. MODEL NUMBER | 2. REF. NO. |
| 3. PART NO. | 4. DESCRIPTION |

in **USA**: Contact your nearest SHARP Parts Distributor to order. For location of SHARP Parts Distributor, Please call Toll-Free; 1-800-BE-SHARP

★ MARK: SPARE PARTS-DELIVERY SECTION

▲ MARK: X-RAY RELATED PARTS

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

PICTURE TUBE

▲ Δ V101	VB68QDN891X2E or VB68ADT2503		Picture Tube(With DY601)	CH
Δ L703	RCiLG0120GJZZ or RCiLG0038GEZZ		Degaussing Coil	AH
	LHLDW0102GJKZ	X	Wire Holder, x6	AC
	MSPRT0002MEZZ		Spring	AE
Δ	QEARC2702MEZZ		Grounding Strap	AC

	CRT	DY	T602
COMBINATION	A6820B91X2E	D5E-2B12FA	F0033ME
	A68A072503	68T1CSZ	

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

PRINTED WIRING BOARD ASSEMBLIES (NOT REPLACEMENT ITEM)

PWB-A	DUNTKA526WEE4	-	MAIN Unit	—
PWB-B	DUNTKA527WEB7	-	CRT Unit	—
PWB-C	DUNTKA528WEA6	-	AV Unit	—
PWB-R	DUNTKA533WEA1	-	P-IN-P Unit	—
PWB-S	DUNTKB224WEA2	-	MTS MODULE Unit	—

PWB-A: DUNTKA526WEE4

MAIN UNIT

TUNER

NOTE: THE PARTS HERES SHOWN ARE SUPPLIED AS AN ASSEMBLY BUT NOT INDEPENDENTLY.

Δ TU51	VTUVTST5UF740	X	Tuner	AX
	or			
	VTUENV56DA1G63			

INTEGRATED CIRCUITS

Δ IC201	RH-iX3395CEN2	J	TB1252CN	AY
IC361	VHiAN5276/-1	J	AN5276	AR
IC501	VHiTA8427K/-1	J	TA8427K	AL
IC701	VHiTEA1507/-1	J	TEA1507P/N1	AL
IC702	RH-FX0008GEZZ	J	PC123FY8	AE
IC703	VHiSE120N/-1	J	SE120N	AG
IC751	VHiSTV8164+-1	X	I.C.	AM
IC2001	RH-iXA192WJZZ	X	TMPA8700CSF	AV
IC2040	VHiKiA7045A-1	J	KIA7045AP	AE
	or			
	VHiKiA7045P-1			
IC2101	VHiM24C16B/-1	J	M24C16-BN6	AG

TRANSISTORS

Q201	VS2SC2735//1E	J	2SC2735	AC
Q205	VS2PD601AR/-1	J	2PD601AR	AB
Q206	VS2PD601AR/-1	J	2PD601AR	AB
Q361	VS2PB709AR/-1	J	2PB709AR	AB
Q402	VS2PB709AR/-1	J	2PB709AR	AB
Q405	VS2PD601AR/-1	J	2PD601AR	AB
Q601	VS2SC2482//1	J	2SC2482	AD
Δ Q602	VS2SD2634++-F		2SD2634++	AM
	or			
	VS2SD2539//1E			
Q616	VS2PD601AR/-1	J	2PD601AR	AB
	or			
	VS2SC1623L61E			

Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTKA526WEE4 MAIN UNIT				
Q650	VS2SA1266-Y-1	J	2SA1266-Y	AA
△ Q701	VSST6NC60FP1E	J	ST6NC60FP	AN
	or			
	VSST6NK60FP			
Q727	VS2SC3333//-1	J	2SC3333	AG
Q728	VS2SA1091-O1A	J	2SA1091	AA
Q729	VS2SA1266-Y-1	J	2SA1266-Y	AA
Q730	VS2SC3198-G-1	J	2SC3198-G	AA
Q751	VS2SC3198-G-1	J	2SC3198-G	AA
Q752	VS2PD601AR/-1	J	2PD601AR	AB
	or			
	VS2SC1623L61E			
Q753	VS2SC3198-G-1	J	2SC3198-G	AA
Q801	VS2PD601AR/-1	J	2PD601AR	AB
	or			
	VS2SC1623L61E			
Q901	VSiMX1C/C//-1	J	IMX1C/C	AB
Q902	VSiMX1C/C//-1	J	IMX1C/C	AB
Q903	VSiMX1C/C//-1	J	IMX1C/C	AB
Q908	VS2PD601AR/-1	J	2PD601AR	AB
Q2002	VS2SA1266-Y-1	J	2SA1266-Y	AA
Q2059	VS2SC3198-G-1	J	2SC3198-G	AA
Q2060	VS2PD601AR/-1	J	2PD601AR	AB
	or			
	VS2SC1623L61E			
Q2201	VS2PD601AR/-1	J	2PD601AR	AB
	or			
	VS2SC1623L61E			
Q2211	VS2PD601AR/-1	J	2PD601AR	AB
	or			
	VS2SC1623L61E			
DIODES				
D52	RH-EX0676GEZZ	J	Zener Diode, 32V	AA
D53	RH-EX0619GEZZ	J	Zener Diode, 6.2V	AA
D361	VHD1SS119//-1	J	Diode	AB
D362	VHD1SS119//-1	J	Diode	AB
△ D501	RH-DX0131CEZZ	J	Diode	AC
D510	RH-DX0441CEZZ	J	Diode	AC
D511	RH-EX0654CEZZ	J	Zener Diode, 75V	AD
D603	RH-EX0631GEZZ	J	Zener Diode, 9.1V	AA
D621	RH-EX0631GEZZ	J	Zener Diode, 9.1V	AA
△ D622	RH-DX0131CEZZ	J	Diode	AC
D650	RH-EX0628GEZZ	J	Zener Diode, 8.2V	AC
▲ △ D651	VHD1SS244//-1	J	Diode	AB
	or			
	VHD1SS82///-1			
▲ △ D652	RH-EX0641GEZZ	J	Zener Diode, 12V	AA
▲ △ D653	VHD1SS119//-1	J	Diode	AB
D657	VHD1SS119//-1	J	Diode	AB
D707	VHD1SS119//-1	J	Diode	AB
	or			
	VHD1SS244//-1			
D708	VHD1SS119//-1	J	Diode	AB
	or			
	VHD1SS244//-1			
△ D709	RH-DX0229CEZZ	J	Diode	AF
△ D712	RH-DX0468CEZZ	J	Diode	AE
△ D713	RH-DX0477CEZZ	J	Diode	AF
D716	VHD1SS119//-1	J	Diode	AB
D717	RH-EX0650GEZZ	J	Zener Diode, 16V	AB
D721	VHD1SS119//-1	J	Diode	AB
	or			
	VHD1SS244//-1			
△ D725	RH-DX0407CEN1		Diode	AB
	or			
	RH-DX0468CEZZ			
D755	VHD1SS119//-1	J	Diode	AB
D801	RH-EX0631GEZZ	J	Zener Diode, 9.1V	AA
D802	RH-EX0631GEZZ	J	Zener Diode, 9.1V	AA
D2402	RH-EX0619GEZZ	J	Zener Diode, 6.2V	AA

Ref. No.	Part No.	★	Description	Code																								
D2403	RH-EX0619GEZZ	J	Zener Diode, 6.2V	AA																								
△ VA701	RH-VX0019CEZZ	J	Varistor	AC																								
	or																											
	RH-VX0048CEZZ																											
	or																											
	RH-VX0035CEZZ																											
PACKAGED CIRCUITS																												
△ PR702	RMPTP0092CEZZ	J	Packaged Circuit	AH																								
X801	RCRSAA011WJZZ	X	Crystal	AG																								
	or																											
	RCRSB0278CEZZ																											
FILTERS AND COILS																												
CF202	RFiLC0447CEZZ	J	Ceramic Filter	AD																								
CF403	RFiLC0446CEZZ	J	Ceramic Filter	AD																								
CF2040	RFiLA0099CEZZ	J	Ceramic Filter	AE																								
L51	VP-CF270K0000	J	Peaking 27μH	AB																								
L201	VP-XF1R2K0000	J	Peaking 1.2μH	AB																								
L203	VP-DF100K0000	J	Peaking 10μH	AB																								
L401	VP-XF100K0000	J	Peaking 10μH	AB																								
L642	RCiLZ0102MEZZ	J	Coil	AH																								
△ L701	RCiLF0313CEZZ	J	Coil	AH																								
	or																											
	RCiLF0273CEZZ																											
△ L702	RCiLF0025PEZZ	R	Coil	AK																								
	or																											
	RCiLF0313CEZZ																											
	or																											
	RCiLF0273CEZZ																											
L705	RCiLP0179CEZZ	J	Coil	AD																								
L729	RCiLP0179CEZZ	J	Coil	AD																								
L801	VP-DF100K0000	J	Peaking 10μH	AB																								
L802	VP-DF6R8K0000	J	Peaking 6.8μH	AB																								
L2040	RCiLB0159CEZZ	J	Oscillation Coil	AE																								
SF201	RFiLC0405CEZZ	J	SAW Filter	AH																								
TRANSFORMERS																												
T201	RCiLi0636CEZZ	X	IF Coil	AH																								
△ T601	RTRNZ0057PEZZ	R	Transformer	AK																								
▲ △ T602	RTRNF0033MEZZ		H-Volt Transformer	AY																								
△ T702	RTRNWA064WJZZ		Transformer	AH																								
	or																											
	RTRNWA005GJN1																											
	or																											
	RTRNWA005GJZZ																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>CR1</th> <th>T602</th> <th>CR09</th> <th>CR10</th> <th>FR01</th> <th>FR02</th> </tr> </thead> <tbody> <tr> <td>COMBINATION</td> <td>ASBZM911AE</td> <td>FOOZM9</td> <td>PVCZM908H</td> <td>PVCZM908H</td> <td>VW-FL-3M80RT1H</td> </tr> <tr> <td></td> <td>ASBZM911CE</td> <td></td> <td>PVCZM908H</td> <td>PVCZM908H</td> <td>VW-FL-3M80RT1H</td> </tr> <tr> <td></td> <td>ASBZM92503</td> <td></td> <td>PVCZM917H</td> <td>PVCZM917H</td> <td>VW-FL-3M80R18LH</td> </tr> </tbody> </table>					CR1	T602	CR09	CR10	FR01	FR02	COMBINATION	ASBZM911AE	FOOZM9	PVCZM908H	PVCZM908H	VW-FL-3M80RT1H		ASBZM911CE		PVCZM908H	PVCZM908H	VW-FL-3M80RT1H		ASBZM92503		PVCZM917H	PVCZM917H	VW-FL-3M80R18LH
CR1	T602	CR09	CR10	FR01	FR02																							
COMBINATION	ASBZM911AE	FOOZM9	PVCZM908H	PVCZM908H	VW-FL-3M80RT1H																							
	ASBZM911CE		PVCZM908H	PVCZM908H	VW-FL-3M80RT1H																							
	ASBZM92503		PVCZM917H	PVCZM917H	VW-FL-3M80R18LH																							
CAPACITORS																												
<i>[EL... Electrolytic, M-Poly... Metalized Polypro Film]</i>																												
C53	VCEA0A1HW105M	J	1 50V EL.	AB																								
C54	VCEA0A1HW475M	J	4.7 50V EL.	AB																								
C55	VCEA0A0JW338M	J	3300 6.3V EL.	AD																								
C201	VCKYCY1HB102K	J	1000p 50V Ceramic	AA																								
C202	VCKYCY1HB103K	J	0.01 50V Ceramic	AA																								
C203	VCKYCY1HB102K	J	1000p 50V Ceramic	AA																								
C204	VCKYCY1HB103K	J	0.01 50V Ceramic	AA																								
C223	VCKYCY1CF104Z	J	0.1 16V Ceramic	AA																								
C224	VCEA0A1HW475M	J	4.7 50V EL.	AB																								
C225	VCKYCY1HB102K	J	1000p 50V Ceramic	AA																								
C226	VCEA0A1HW224M	J	0.22 50V EL.	AB																								
C227	VCEA0A1CW226M	J	22 16V EL.	AB																								
C228	VCKYCY1CF474Z	J	0.47 16V Ceramic	AB																								
C229	VCEA0A1AW228M	J	2200 10V EL.	AD																								
C230	VCEA0A1HW225M	J	2.2 50V EL.	AB																								
C231	VCKYCY1CF104Z	J	0.1 16V Ceramic	AA																								
C232	VCEA0A1HW474M	J	0.47 50V EL.	AB																								
C233	VCKYCY1CF104Z	J	0.1 16V Ceramic	AA																								
C361	VCEA0A1HW105M	J	1 50V EL.	AB																								
C362	VCQYTA1HM123J	J	0.012 50V Mylar	AA																								
C363	VCQYTA1HM123J	J	0.012 50V Mylar	AA																								
C364	VCEA0A1EW227M	J	220 25V EL.	AB																								

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTKA526WEE4 MAIN UNIT									
C365	VCEA0A1HW105M	J	1 50V EL.	AB					
C366	VCEA0A1CW106M	J	10 16V EL.	AB					
C367	VCEA0A1VW108M	J	1000 35V EL.	AD					
C368	VCKYPA1HF103Z	J	0.01 50V Ceramic	AA	△	C705	RC-EZ0719CEZZ	560 200V EL.	AC
C369	VCEA0A1CW227M	J	220 16V EL.	AC		C706	RC-KZ021SCEZZ	J 3300p 2kV Ceramic	AE
C370	VCEA0A1CW227M	J	220 16V EL.	AC		C710	RC-KZ0040CEZZ	J Ceramic	AD
C371	VCEA0A1EW108M	J	1000 25V EL.	AD		C712	VCKYCY1HB103K	J 0.01 50V Ceramic	AA
C372	VCEA0A1EW108M	J	1000 25V EL.	AD		C717	VCKYPA2HB472K	J 4700p 500V Ceramic	AB
C373	VCKYCY1CF104Z	J	0.1 16V Ceramic	AA	△	C722	VCQYTA1HM104J	J 0.1 50V Mylar	AA
C374	VCEA0A1HW225M	J	2.2 50V EL.	AB	△	C723	RC-EZ0724CEZZ	J 100 160V EL.	AG
C375	VCEA0A1HW225M	J	2.2 50V EL.	AB	△	C725	RC-EZ0810CEZZ	J 330 160V EL.	AH
C419	VCKYCY1CF224Z	J	0.22 16V Ceramic	AA		C726	VCKYPH3DB561K	J 560p 2kV Ceramic	AC
C420	VCEA0A1CW476M	J	47 16V EL.	AB		C727	VCKYPH3DB561K	J 560p 2kV Ceramic	AC
C429	VCQYTA1HM103J	J	0.01 50V Mylar	AA		C730	VCEA4A1VN108M	J 1000 35V EL.	AD
C433	VCKYCY1HB103K	J	0.01 50V Ceramic	AA		C731	RC-EZ0385CEZZ	J 1000 10V EL.	AE
C434	VCEA0A1HW105M	J	1 50V EL.	AB		C732	VCKYPA2HB102K	J 1000p 500V Ceramic	AA
C435	VCQYTA1HM104J	J	0.1 50V Mylar	AA		C735	VCEA0A1CW106M	J 10 16V EL.	AB
C501	VCKYPA2HB102K	J	1000p 500V Ceramic	AA		C736	VCEA0A1CW106M	J 10 16V EL.	AB
C502	VCEA0A1VW108M	J	1000 35V EL.	AD		C737	VCEA0A1CW107M	J 100 16V EL.	AC
C510	VCFYSA1JB564J	J	0.56 63V Mylar	AE		C738	VCFPVC3CA452H	4500p 1.6kV M-Poly.	AB
C511	VCKYPA2HB391K	J	390p 500V Ceramic	AA		C740	VCEA0A1EW476M	J 47 25V EL.	AB
C512	VCQYTA1HM473J	J	0.047 50V Mylar	AA		C741	VCKYPA2HB102K	J 1000p 500V Ceramic	AA
C513	VCQYTA1HM103J	J	0.01 50V Mylar	AA		C742	VCKYPA2HB102K	J 1000p 500V Ceramic	AA
C514	VCEA0A1VW107M	J	100 35V EL.	AC		C756	VCEA0A1CW476M	J 47 16V EL.	AB
C515	VCEACA1HC225J	J	2.2 50V EL.	AC		C757	VCEA0A1CW476M	J 47 16V EL.	AB
C516	VCEACA1HC105J	J	1 50V EL.	AB		C780	VCEA9M1EW226M	J 22 25V EL.	AB
C517	VCEA0A1VW108M	J	1000 35V EL.	AD		C781	VCFYFA1HA334J	J 0.33 50V Mylar	AB
C519	VCFYSA1JB473J	J	0.047 63V Mylar	AC		C784	VCKYCY1HF103Z	J 0.01 50V Ceramic	AA
C551	VCEA0A1HW474M	J	0.47 50V EL.	AB		C787	VCKYCY1HF103Z	J 0.01 50V Ceramic	AA
C552	VCKYCY1HB392K	J	3900p 50V Ceramic	AA		C801	VCCCCY1HH110J	J 11p 50V Ceramic	AA
C553	VCKYCY1HB392K	J	3900p 50V Ceramic	AA		C802	VCKYCY1HB222K	J 2200p 50V Ceramic	AA
C606	VCKYPA2HB561K	J	560p 500V Ceramic	AA		C803	VCEA0A1HW224M	J 0.22 50V EL.	AB
C607	VCKYPA1HB472K	J	4700p 50V Ceramic	AA		C804	VCKYCY1CF104Z	J 0.1 16V Ceramic	AA
△△ C609	VCFFPD3ZA802H		8000p 1.8kV M-Poly.	AC		C805	VCEA0A1CW337M	J 330 16V EL.	AC
△△ C610	VCFFPD3ZA802H		8000p 1.8kV M-Poly.	AC		C806	VCKYCY1CF104Z	J 0.1 16V Ceramic	AA
C614	VCKYPA2HB102K	J	1000p 500V Ceramic	AA		C807	VCKYCY1CF104Z	J 0.1 16V Ceramic	AA
C615	VCKYCY1CF104Z	J	0.1 16V Ceramic	AA		C808	VCKYCY1CF104Z	J 0.1 16V Ceramic	AA
C616	VCEA0A1HW224M	J	0.22 50V EL.	AB		C809	VCEA0A1CW106M	J 10 16V EL.	AB
C617	VCEA0A1HW474M	J	0.47 50V EL.	AB		C810	VCEA0A1CW106M	J 10 16V EL.	AB
C618	VCKYCY1HB822K	J	8200p 50V Ceramic	AB		C811	VCKYCY1HB103K	J 0.01 50V Ceramic	AA
C619	VCKYCY1HB103K	J	0.01 50V Ceramic	AA		C812	VCKYCY1HB103K	J 0.01 50V Ceramic	AA
C620	VCEA0A1CW227M	J	220 16V EL.	AC		C813	VCEA0A1CW107M	J 100 16V EL.	AC
C623	VCEA4A2EN106M	J	10 250V EL.	AD		C814	VCKYCY1HB103K	J 0.01 50V Ceramic	AA
C624	VCKYPA2HB102K	J	1000p 500V Ceramic	AA		C815	VCKYCY1HB103K	J 0.01 50V Ceramic	AA
C627	VCEA0A1HW106M	J	10 50V EL.	AB		C816	VCEA0A1CW107M	J 100 16V EL.	AC
C644	VCFPVC2DB514J		0.51 200V M-Poly.	AF		C817	VCKYCY1HB103K	J 0.01 50V Ceramic	AA
C647	VCKYPA2HB102K	J	1000p 500V Ceramic	AA		C930	VCEA0A1HW335M	J 3.3 50V EL.	AB
C650	VCEA0A1HW105M	J	1 50V EL.	AB		C931	VCQYTA1HM183J	J 0.018 50V Mylar	AB
C651	VCQYTA2AA104K	J	0.1 100V Mylar	AB		C932	VCQYTA1HM183J	J 0.018 50V Mylar	AB
C652	VCEA0A1VW476M	J	47 35V EL.	AB		C933	VCEA0A1HW335M	J 3.3 50V EL.	AB
C653	VCEA0A1VW226M	J	22 35V EL.	AB		C934	VCEA0A1CW476M	J 47 16V EL.	AB
C654	VCFYFA1HA334J	J	0.33 50V Mylar	AB		C935	VCEA0A1HW335M	J 3.3 50V EL.	AB
△ C701	RC-FZ036SCEZZ	J	0.01 AC125V Plastic	AC		C936	VCEA0A1HW335M	J 3.3 50V EL.	AB
	or					C945	VCKYCY1HB102K	J 1000p 50V Ceramic	AA
	RC-FZ028SCEZZ		0.01 AC125V Plastic			C946	VCEA0A1HW225M	J 2.2 50V EL.	AB
	or					C948	VCEA0A1HW225M	J 2.2 50V EL.	AB
	RC-FZ020SCEZZ		0.01 AC125V Plastic			C956	VCEA0A1CW337M	J 330 16V EL.	AC
	or					C960	VCE9GA1HW475M	J 4.7 50V EL. (N.P)	AB
	RC-FZ037SCEZZ		0.22 AC125V Plastic			C961	VCE9GA1HW475M	J 4.7 50V EL. (N.P)	AB
						C962	VCKYCY1CF104Z	J 0.1 16V Ceramic	AA
						C2001	VCCCCY1HH331J	J 330p 50V Ceramic	AA
						C2003	VCEA0A1HW106M	J 10 50V EL.	AB
						C2004	VCEA0A1CW476M	J 47 16V EL.	AB
						C2005	VCEA0A1CW106M	J 10 16V EL.	AB
						C2040	VCKYCY1CF104Z	J 0.1 16V Ceramic	AA
						C2041	VCEA0A1HW105M	J 1 50V EL.	AB
						C2060	VCKYCY1CF104Z	J 0.1 16V Ceramic	AA
						C2061	VCCCCY1HH101J	J 100p 50V Ceramic	AA
						C2062	VCEA0A1AW107M	J 100 10V EL.	AB
						C2063	VCKYCY1CF104Z	J 0.1 16V Ceramic	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTKA526WEE4 MAIN UNIT									
C2064	VCKYCY1CF104Z	J	0.1 16V Ceramic	AA	R227	VRS-CY1JF333J	J	33k 1/16W M-Ox.	AA
C2201	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R228	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA
C2202	VCCCCY1HH390J	J	39p 50V Ceramic	AA	R229	VRS-CY1JF221J	J	220 1/16W M-Ox.	AA
C2203	VCCCCY1HH101J	J	100p 50V Ceramic	AA	R233	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA
C2601	VCEAOA1HW476M	J	47 50V EL.	AB	R234	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA
C2602	VCCCCY1HH101J	J	100p 50V Ceramic	AA	R235	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA
RESISTORS									
<i>[M-Ox... Metal Oxide, M-Film... Metal Film]</i>									
RJ13	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R362	VRD-RA2BE222J	J	2.2k 1/8W Carbon	AA
RJ14	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R363	VRD-RA2BE222J	J	2.2k 1/8W Carbon	AA
RJ17	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R364	VRS-CY1JF561J	J	560 1/16W M-Ox.	AA
RJ20	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R365	VRS-CY1JF561J	J	560 1/16W M-Ox.	AA
RJ24	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R367	VRN-RL3DBR56J+	X	0.56 2W M-Film	AE
RJ25	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R368	VRD-RA2BE222J	J	2.2k 1/8W Carbon	AA
RJ27	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R369	VRD-RA2BE822J	J	8.2k 1/8W Carbon	AA
RJ32	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R371	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA
RJ33	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R372	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
RJ35	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R415	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
RJ39	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R430	VRD-RA2BE331J	J	330 1/8W Carbon	AA
RJ40	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R431	VRS-CY1JF331J	J	330 1/16W M-Ox.	AA
RJ41	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R432	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA
RJ46	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R440	VRS-CY1JF000J	J	00 1/16W M-Ox.	AA
RJ47	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	△ R501	VRN-RL3ABR56J	J	0.56 1W M-Film	AA
RJ52	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R510	VRD-RA2BE471J	J	470 1/8W Carbon	AA
RJ53	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R511	VRD-RA2BE393J	J	39k 1/8W Carbon	AA
RJ54	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R512	VRD-RA2BE683J	J	68k 1/8W Carbon	AA
RJ55	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R513	VRS-CY1JF273J	J	27k 1/16W M-Ox.	AA
RJ56	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R514	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
RJ60	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R520	VRS-CY1JF184J	J	180k 1/16W M-Ox.	AA
RJ65	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R523	VRN-RL3DB1R0J+	X	1 1.2W M-Film	AE
RJ66	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R524	VRS-RG3AB391J	X	390 1W M-Ox.	AE
RJ68	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R534	VRD-RA2BE181J	J	180 1/8W Carbon	AA
RJ73	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R551	VRS-CY1JF562F	J	5.6k 1/16W M-Ox.	AA
RJ74	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R578	VRD-RA2BE123J	J	12k 1/8W Carbon	AA
RJ77	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R601	VRD-RM2HD220J	J	22 1/2W Carbon	AA
RJ78	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	△ R604	VRS-KA3NG182J	J	1.8k 7W M-Ox.	AB
RJ79	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R605	VRD-RM2HD331J	J	330 1/2W Carbon	AA
RJ80	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R606	VRD-RM2HD331J	J	330 1/2W Carbon	AA
RJ81	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R609	VRS-RG3AB562J	X	5.6k 1W M-Ox.	AE
RJ82	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	△ R611	VRW-KQ41C3R3K	J	3.3 15W Cement	AG
RJ83	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R612	VRS-CY1JF472J	J	4.7k 1/16W M-Ox.	AA
RJ84	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R613	VRS-CY1JF474J	J	470k 1/16W M-Ox.	AA
RJ86	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R614	VRS-CY1JF395J	J	3.9M 1/16W M-Ox.	AA
RJ87	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	▲▲ R616	VRD-RA2BE103J	J	10k 1/8W Carbon	AA
RJ88	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	▲▲ R617	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA
RJ90	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	▲▲ R618	VRS-CY1JF473J	J	47k 1/16W M-Ox.	AA
RJ94	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	△ R621	VRN-RL3AB2R7J	X	2.7 1W M-Film	AE
RJ95	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	△ R622	VRN-RL2HCR47J	J	0.47 1/2W M-Film	AE
RJ97	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	or				
RJ98	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	△ R623	VRN-RL3AB2R7J	J	2.7 1W M-Film	AE
RJ101	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	△ R624	VRS-RG3DB332J	X	3.3k 2W M-Ox.	AE
R57	VRS-CY1JF392J	J	3.9k 1/16W M-Ox.	AA	R625	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
R201	VRS-CY1JF151J	J	150 1/16W M-Ox.	AA	R627	VRS-KT3LB471J	J	470 3W M-Ox.	AD
R202	VRS-CY1JF122J	J	1.2k 1/16W M-Ox.	AA	R631	VRS-RG3AB103J	J	10k 1W M-Ox.	AB
R203	VRS-CY1JF122J	J	1.2k 1/16W M-Ox.	AA	R633	VRD-RA2EE683J	J	68k 1/4W Carbon	AA
R204	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA	R635	VRD-RA2EE223J	J	22k 1/4W Carbon	AA
R211	VRS-CY1JF331J	J	330 1/16W M-Ox.	AA	R647	VRS-SV2HC220J	J	22 1/2W M-Ox.	AA
R212	VRS-CY1JF000J	J	00 1/16W M-Ox.	AA	▲▲ R651	VRN-RL2HC1R0J	X	1 1/2W M-Film	AE
R215	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA	▲▲ R652	VRD-RA2EE103G	J	10k 1/4W Carbon	AA
R217	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA	▲▲ R653	VRD-RA2EE562G	J	5.6k 1/4W Carbon	AA
R219	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA	▲▲ R654	VRD-RA2EE393G	X	39k 1/4W Carbon	AE
R220	VRS-CY1JF392J	J	3.9k 1/16W M-Ox.	AA	R655	VRS-CY1JF562J	J	5.6k 1/16W M-Ox.	AA
R225	VRD-RA2BE680J	J	68 1/8W Carbon	AA	R656	VRS-CY1JF224J	J	220k 1/16W M-Ox.	AA
R226	VRD-RA2BE101J	J	100 1/8W Carbon	AB	△ R658	VRS-VV3DB123J	J	12k 2W M-Ox.	AA
					R659	VRS-CY1JF471J	J	470 1/16W M-Ox.	AA
					R664	VRS-CY1JF471J	J	470 1/16W M-Ox.	AA
					R666	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
					R667	VRS-CY1JF562J	J	5.6k 1/16W M-Ox.	AA
					R668	VRD-RA2BE680J	J	68 1/8W Carbon	AA
					R669	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA
					R670	VRD-RM2HD563J	J	56k 1/2W Carbon	AA
					△ R671	VRS-RG2HC102J	J	1k 1/2W M-Ox.	AA
					R672	VRD-RM2HD393J	J	39k 1/2W Carbon	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTKA526WEE4 MAIN UNIT									
R699	VRS-CY1JF562J	J	5.6k 1/16W	M-Ox. AA	R913	VRS-CY1JF392J	J	3.9k 1/16W	M-Ox. AA
△ R702	VRW-KQ4AC1R2K	J	1.2 10W	Cement AE	R914	VRS-CY1JF182J	J	1.8k 1/16W	M-Ox. AA
R705	VRN-RL3DBR22J	J	0.22 2W	M-Film AA	R915	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R706	VRN-RL3DBR22J	J	0.22 2W	M-Film AA	R916	VRS-CY1JF683J	J	68k 1/16W	M-Ox. AA
R707	VRD-RM2HD270J	J	27 1/2W	Carbon AA	R917	VRS-CY1JF000J	J	0 1/16W	M-Ox. AA
R709	VRD-RA2BE223J	J	22k 1/8W	Carbon AA	R918	VRS-CY1JF000J	J	0 1/16W	M-Ox. AA
R710	VRS-RG2HC103J	J	10k 1/2W	M-Ox. AA	R922	VRD-RA2BE102J	J	1k 1/8W	Carbon AA
R712	VRD-RA2BE100J	J	10 1/8W	Carbon AA	R923	VRD-RA2BE102J	J	1k 1/8W	Carbon AA
R713	VRS-RG2HC122J+	X	1.2k 1/2W	M-Ox. AE	R924	VRS-CY1JF750J	J	75 1/16W	M-Ox. AA
R714	VRD-RM2HD100J	J	10 1/2W	Carbon AA	R925	VRS-CY1JF750J	J	75 1/16W	M-Ox. AA
R715	VRD-RA2BE470J	J	47 1/8W	Carbon AA	R926	VRS-CY1JF750J	J	75 1/16W	M-Ox. AA
R718	VRD-RA2BE102J	J	1k 1/8W	Carbon AA	R927	VRS-CY1JF750J	J	75 1/16W	M-Ox. AA
R723	VRN-RL3DBR22J	J	0.22 2W	M-Film AA	R928	VRS-CY1JF750J	J	75 1/16W	M-Ox. AA
△ R725	VRD-RM2HD821J	J	820 1/2W	Carbon AA	R940	VRS-CY1JF221J	J	220 1/16W	M-Ox. AA
R726	VRD-RM2HD122J	J	1.2k 1/2W	Carbon AA	R950	VRS-CY1JF750J	J	75 1/16W	M-Ox. AA
△ R737	VRN-RL3DBR56J		0.56 2W	M-Film AA	R951	VRS-CY1JF750J	J	75 1/16W	M-Ox. AA
R744	VRS-CY1JF272J	J	2.7k 1/16W	M-Ox. AA	R952	VRD-RA2BE333J	J	33k 1/8W	Carbon AA
R745	VRS-CY1JF272J	J	2.7k 1/16W	M-Ox. AA	R961	VRS-CY1JF221J	J	220 1/16W	M-Ox. AA
R746	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA	R962	VRS-CY1JF221J	J	220 1/16W	M-Ox. AA
R747	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA	R963	VRD-RA2BE331J	J	330 1/8W	Carbon AA
△ R750	RR-DZ0049CEZZ	J	3.9M 1/2W	Solid AB	R969	VRS-CY1JF221J	J	220 1/16W	M-Ox. AA
	or				R989	VRS-CY1JF750J	J	75 1/16W	M-Ox. AA
	RR-DZ0048CEZZ				R991	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R751	VRS-CY1JF473J	J	47k 1/16W	M-Ox. AA	R992	VRS-CY1JF122J	J	1.2k 1/16W	M-Ox. AA
R766	VRS-CY1JF333J	J	33k 1/16W	M-Ox. AA	△ R2001	VRS-CY1JF562J	J	5.6k 1/16W	M-Ox. AA
R767	VRS-CY1JF273J	J	27k 1/16W	M-Ox. AA	R2002	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
R768	VRS-CY1JF332J	J	3.3k 1/16W	M-Ox. AA	R2004	VRD-RA2BE101J	J	100 1/8W	Carbon AB
R769	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA	△ R2007	VRS-CY1JF562J	J	5.6k 1/16W	M-Ox. AA
R770	VRD-RM2HD823J	J	82k 1/2W	Carbon AA	R2008	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R771	VRD-RA2BE272J	J	2.7k 1/8W	Carbon AA	△ R2009	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
R772	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA	R2010	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R774	VRS-CY1JF393J	J	39k 1/16W	M-Ox. AA	R2011	VRD-RA2BE561J	J	560 1/8W	Carbon AA
R775	VRS-CY1JF563J	J	56k 1/16W	M-Ox. AA	R2013	VRD-RA2BE822J	J	8.2k 1/8W	Carbon AA
R776	VRN-VV3DB3R3J	J	3.3 2W	M-Film AB	△ R2016	VRS-CY1JF104J	J	100k 1/16W	M-Ox. AA
R777	VRS-KA3HG8R2K	J	8.2 5W	M-Ox. AD	R2022	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
R778	VRS-VV3AB101J	J	100 1W	M-Ox. AA	R2024	VRS-CY1JF472J	J	4.7k 1/16W	M-Ox. AA
R779	VRS-CY1JF273J	J	27k 1/16W	M-Ox. AA	R2025	VRS-CY1JF472J	J	4.7k 1/16W	M-Ox. AA
R789	VRS-CY1JF394J	J	390k 1/16W	M-Ox. AA	R2026	VRS-CY1JF472J	J	4.7k 1/16W	M-Ox. AA
R801	VRS-CY1JF333J	J	33k 1/16W	M-Ox. AA	R2027	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R802	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA	R2028	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R804	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA	R2029	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
R805	VRS-CY1JF272J	J	2.7k 1/16W	M-Ox. AA	R2040	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R806	VRS-CY1JF681J	J	680 1/16W	M-Ox. AA	R2041	VRS-CY1JF333J	J	33k 1/16W	M-Ox. AA
R807	VRS-CY1JF681J	J	680 1/16W	M-Ox. AA	R2042	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA
R808	VRS-CY1JF681J	J	680 1/16W	M-Ox. AA	R2043	VRS-CY1JF333J	J	33k 1/16W	M-Ox. AA
R809	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA	R2044	VRS-CY1JF153J	J	15k 1/16W	M-Ox. AA
R810	VRD-RA2BE101J	J	100 1/8W	Carbon AB	R2045	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA
R811	VRD-RA2BE101J	J	100 1/8W	Carbon AB	R2047	VRS-CY1JF221J	J	220 1/16W	M-Ox. AA
R812	VRS-CY1JF224J	J	220k 1/16W	M-Ox. AA	R2048	VRS-CY1JF562J	J	5.6k 1/16W	M-Ox. AA
R813	VRD-RA2BE271J	J	270 1/8W	Carbon AA	R2051	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R814	VRD-RA2BE101J	J	100 1/8W	Carbon AB	R2052	VRD-RA2BE101J	J	100 1/8W	Carbon AB
R815	VRD-RA2BE101J	J	100 1/8W	Carbon AB	R2054	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA
R816	VRS-CY1JF272J	J	2.7k 1/16W	M-Ox. AA	R2055	VRS-CY1JF682J	J	6.8k 1/16W	M-Ox. AA
R817	VRS-CY1JF272J	J	2.7k 1/16W	M-Ox. AA	R2060	VRS-CY1JF221J	J	220 1/16W	M-Ox. AA
R818	VRS-CY1JF272J	J	2.7k 1/16W	M-Ox. AA	R2061	VRS-CY1JF562J	J	5.6k 1/16W	M-Ox. AA
R819	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA	R2063	VRS-CY1JF222J	J	2.2k 1/16W	M-Ox. AA
R820	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA	R2064	VRS-CY1JF332J	J	3.3k 1/16W	M-Ox. AA
R821	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA	R2066	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
R822	VRD-RA2BE101J	J	100 1/8W	Carbon AB	R2067	VRD-RA2BE222J	J	2.2k 1/8W	Carbon AA
R830	VRD-RA2BE102J	J	1k 1/8W	Carbon AA	R2081	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA
R901	VRS-CY1JF104J	J	100k 1/16W	M-Ox. AA	R2084	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
R902	VRS-CY1JF104J	J	100k 1/16W	M-Ox. AA	R2101	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA
R903	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA	R2102	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA
R904	VRS-CY1JF683J	J	68k 1/16W	M-Ox. AA	R2201	VRS-CY1JF222J	J	2.2k 1/16W	M-Ox. AA
R905	VRS-CY1JF223J	J	22k 1/16W	M-Ox. AA	R2202	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
R906	VRS-CY1JF392J	J	3.9k 1/16W	M-Ox. AA	R2203	VRS-CY1JF184J	J	180k 1/16W	M-Ox. AA
R907	VRS-CY1JF182J	J	1.8k 1/16W	M-Ox. AA	R2204	VRS-CY1JF223J	J	22k 1/16W	M-Ox. AA
R909	VRS-CY1JF102J	J	1k 1/16W	M-Ox. AA	R2211	VRS-CY1JF222J	J	2.2k 1/16W	M-Ox. AA
R910	VRD-RA2BE102J	J	1k 1/8W	Carbon AA	R2212	VRS-CY1JF682J	J	6.8k 1/16W	M-Ox. AA
R911	VRS-CY1JF683J	J	68k 1/16W	M-Ox. AA	R2213	VRS-CY1JF333J	J	33k 1/16W	M-Ox. AA
R912	VRS-CY1JF223J	J	22k 1/16W	M-Ox. AA	R2401	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA
R913	VRS-CY1JF392J	J	3.9k 1/16W	M-Ox. AA	R2402	VRD-RA2BE101J	J	100 1/8W	Carbon AB
					R2403	VRD-RA2BE101J	J	100 1/8W	Carbon AB
					R2404	VRS-CY1JF101J	J	100 1/16W	M-Ox. AA
					R2501	VRS-CY1JF183J	J	18k 1/16W	M-Ox. AA
					R2502	VRS-CY1JF183J	J	18k 1/16W	M-Ox. AA
					R2503	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
					R2504	VRS-CY1JF103J	J	10k 1/16W	M-Ox. AA
					R2505	VRS-CY1JF822J	J	8.2k 1/16W	M-Ox. AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTKA526WEE4 MAIN UNIT									
R2506	VRS-CY1JF822J	J	8.2k 1/16W M-Ox.	AA	P1901	QPLGN1559REZZ	X	Plug, 15-pin(VA)	AF
R2507	VRS-CY1JF183J	J	18k 1/16W M-Ox.	AA	P1902	QPLGN1559REZZ	X	Plug, 15-pin(VB)	AF
R2508	VRS-CY1JF183J	J	18k 1/16W M-Ox.	AA	P1903	QPLGN1059REZZ	J	Plug, 10-pin(VC)	AC
R2601	VRD-RA2BE470J	J	47 1/8W Carbon	AA	P2401	QPLGN0561CEZZ	J	Plug, 5-pin	AB
R2603	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	SC3001	QSOCN0259FJ00	J	Socket, 10-pin(EA)	AE
R2605	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	RMC2601	RRMCU0222CEZZ	J	R/C Receiver	AL
SWITCHES									
S2501	QSW-K0003AJZZ	J	Power	AB		RRMCU0235CEZZ			
	or				RDA361	PRDAR0108GJFW		Heat Sink, for IC361	AC
	QSW-K0079GEZZ				RDA501	PRDAR0113GJFW		Heat Sink, for IC501	AE
	or				RDA602	PRDAR0114GJFW	X	Heat Sink, for Q602	AH
	QSW-K0202PEZZ				RDA701	PRDAR0112GJFW		Heat Sink, for Q701	AF
S2502	QSW-K0003AJZZ	J	Menu	AB	RDA751	PRDAR0111GJFW	X	Heat Sink, for IC751	AF
	or					LHLDW1002PEZZ	R	Holder	AB
	QSW-K0079GEZZ					LHLDW1002PEZZ	R	Holder	AB
	or					LX-BZ3049GEFD	J	Screw	AA
	QSW-K0202PEZZ					LX-BZ3100CEFD	J	Screw	AA
S2503	QSW-K0003AJZZ	J	VOL-Down	AB		LX-HZ3007MEFD	X	Screw	AF
	or					MSPRK0034BMFW	J	Spring	AC
	QSW-K0079GEZZ								
	or								
	QSW-K0202PEZZ								
S2504	QSW-K0003AJZZ	J	VOL-Up	AB					
	or								
	QSW-K0079GEZZ								
	or								
	QSW-K0202PEZZ								
S2505	QSW-K0003AJZZ	J	CH-Down	AB					
	or								
	QSW-K0079GEZZ								
	or								
	QSW-K0202PEZZ								
S2506	QSW-K0003AJZZ	J	CH-Up	AB					
	or								
	QSW-K0079GEZZ								
	or								
	QSW-K0202PEZZ								
MISCELLANEOUS PARTS									
△ RY701	RRLYJ0081CEZZ	J	Relay	AL					
	or								
	RRLYJ0094CEZZ								
△ F701	QFS-B4023CEZZ	J	Fuse, 4A/125V	AC					
FH701	QFSDH1013CEZZ	J	Fuse Holder	AC					
FH702	QFSDH1014CEZZ	J	Fuse Holder	AC					
FB601	RBLN-0047CEZZ	J	Ferrite Bead	AB					
FB702	RBLN-0020CEZZ	J	Ferrite Bead	AB					
FB706	RBLN-0037CEZZ	J	Ferrite Bead	AB					
FB707	RBLN-0037CEZZ	J	Ferrite Bead	AB					
J901	QTANJ0540CEZZ	X	AV Terminal	AH					
J902	QTANJ0655CEZZ	J	Terminal, COMPONENT/INPUT3	AK					
J904	QJAKG0074CEZZ	J	Jack, INPUT-2	AF					
J921	QSOCN0430CEZZ	J	Socket, S-VIDEO	AE					
P52	QPLGN0160CEZZ	J	Plug	AB					
P361	QPLGN0461CEZZ	J	Plug, 4-pin(S)	AB					
P403	QPLGN0561CEZZ	J	Plug, 5-pin(GBN)	AB					
P601	QPLGN0160FJZZ	J	Plug, 5-pin(K)	AD					
P622	QPLGN0461CEZZ	J	Plug, 4-pin(YBN)	AB					
P651	QPLGN0361CEZZ	J	Plug, 3-pin(P651-3)	AB					
P701	QPLGN0260CEZZ	J	Plug, 2-pin(M)	AC					
P703	QPLGN0269GEZZ	J	Plug, 2-pin	AB					
P705	QPLGN0160CEZZ	J	Plug, 1-pin(SG)	AB					
P706	QTIPM0083CEZZ	J	Tip	AB					
P1301	QPLGN0561CEZZ	J	Plug, 5-pin(EJ)	AB					


Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-C: DUNTKA528WEA6 AV UNIT									
C1900	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R1900	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
C1901	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R1930	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
C1903	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R1932	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
C1904	VCEA0A1HW105M	J	1 50V EL.	AB	R1935	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
C1905	VCEA0A1HW105M	J	1 50V EL.	AB	R1936	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
C1906	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R1937	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
C1907	VCEA0A1HW105M	J	1 50V EL.	AB	R1938	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
C1908	VCKYCY1HB103K	J	0.01 50V Ceramic	AA	R1941	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
C1909	VCEA0A1HW105M	J	1 50V EL.	AB	R1942	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
C1910	VCEA0A1HW105M	J	1 50V EL.	AB	R1943	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
C1911	VCEA0A1HW105M	J	1 50V EL.	AB	R1944	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
C1912	VCEA0A1HW105M	J	1 50V EL.	AB	R1945	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
C1913	VCEA0A1HW105M	J	1 50V EL.	AB	R1946	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA
C1914	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R1954	VRD-RA2BE221J	J	220 1/8W Carbon	AA
C1915	VCKYCY1HF103Z	J	0.01 50V Ceramic	AA	R1955	VRD-RA2BE221J	J	220 1/8W Carbon	AA
C1916	VCKYCY1HF103Z	J	0.01 50V Ceramic	AA	R1956	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
C1921	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R1957	VRD-RA2BE101J	J	100 1/8W Carbon	AB
C1922	VCKYCY1CF104Z	J	0.1 16V Ceramic	AA	R1958	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
C1923	VCEA0A1CW477M	J	470 16V EL.	AC	R1959	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA
C1926	VCEA0A1CW226M	J	22 16V EL.	AB	R1960	VRD-RA2BE101J	J	100 1/8W Carbon	AB
C1927	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R1962	VRD-RA2BE101J	J	100 1/8W Carbon	AB
C1928	VCEA0A1CW106M	J	10 16V EL.	AB	R1964	VRD-RA2BE101J	J	100 1/8W Carbon	AB
C1929	VCKYCY1HB681K	J	680p 50V Ceramic	AA	R1965	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
C1937	VCEA0A1HW105M	J	1 50V EL.	AB	R1966	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA
C1938	VCEA0A1HW105M	J	1 50V EL.	AB	R1971	VRD-RA2BE101J	J	100 1/8W Carbon	AB
C1939	VCEA0A1HW105M	J	1 50V EL.	AB	R1972	VRD-RA2BE101J	J	100 1/8W Carbon	AB
C1951	VCKYCY1HB681K	J	680p 50V Ceramic	AA					
RESISTORS									
<i>[M-Ox... Metal Oxide]</i>									
RJ11	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	MISCELLANEOUS PARTS P1904 QPLGN0541CEZZ J Plug, 5-pin(EJ) AB SC1901 QSOCN1598REZZ J Socket, 15-pin(VA) AB SC1902 QSOCN1598REZZ J Socket, 15-pin(VB) AB SC1903 QSOCN1098REZZ J Socket, 10-pin(VC) AC SLD1901 PSLDM0102GJFW J Shield AB				
RJ13	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ14	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ15	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ16	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ17	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ18	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ19	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ21	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ22	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ23	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
RJ26	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA					
R1402	VRS-CY1JF681J	J	680 1/16W M-Ox.	AA					
R1403	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA					
R1404	VRS-CY1JF182J	J	1.8k 1/16W M-Ox.	AA					
R1405	VRS-CY1JF471J	J	470 1/16W M-Ox.	AA					
R1406	VRS-CY1JF821J	J	820 1/16W M-Ox.	AA					
R1407	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA					
R1420	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA					
R1422	VRS-CY1JF473J	J	47k 1/16W M-Ox.	AA					
R1423	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA					
R1424	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA					
R1425	VRS-CY1JF221J	J	220 1/16W M-Ox.	AA					
R1426	VRS-CY1JF391J	J	390 1/16W M-Ox.	AA					
R1427	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA					
R1428	VRS-CY1JF473J	J	47k 1/16W M-Ox.	AA					
R1429	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA					
R1430	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA					
R1431	VRS-CY1JF122J	J	1.2k 1/16W M-Ox.	AA					
R1432	VRS-CY1JF331J	J	330 1/16W M-Ox.	AA					
R1433	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA					
R1434	VRS-CY1JF471J	J	470 1/16W M-Ox.	AA					
R1435	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA					
R1459	VRS-CY1JF821J	J	820 1/16W M-Ox.	AA					

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-R:DUNTKA533WEA1									
P-IN-P UNIT									
INTEGRATED CIRCUITS									
IC1801	VHiM65667FP-2	J	M65667FP	BC					
TRANSISTORS									
Q1721	VS2PD601AR/-1	J	2PD601AR	AB					
Q1741	VS2PB709AR/-1	J	2PB709AR	AB					
Q1742	VS2PB709AR/-1	J	2PB709AR	AB					
Q1761	VS2PB709AR/-1	J	2PB709AR	AB					
Q1762	VS2PB709AR/-1	J	2PB709AR	AB					
Q1791	VS2SC1959Y/1E	J	2SC1959Y	AC					
Q1861	VS2PB709AR/-1	J	2PB709AR	AB					
Q1881	VS2PD601AR/-1	J	2PD601AR	AB					
Q1882	VS2PD601AR/-1	J	2PD601AR	AB					
Q1883	VS2PD601AR/-1	J	2PD601AR	AB					
DIODES									
D1791	RH-EX0604GEZZ	J	Zener Diode, 4.3V	AB					
D1801	VHD1SS119// -1	J	Diode	AB					
	or								
	RH-DX0475CEZZ								
D1821	VHD1SS119// -1	J	Diode	AB					
	or								
	RH-DX0475CEZZ								
CRYSTAL									
X1861	RCRSB0283CEZZ	J	Crystal	AG					
	or								
	RCRSB0241CEZZ								
COILS									
L1721	VP-XF680K0000	J	Peaking 68μH	AB					
L1801	VP-XF100K0000	J	Peaking 10μH	AB					
L1821	VP-XF100K0000	J	Peaking 10μH	AB					
L1861	VP-XF100K0000	J	Peaking 10μH	AB					
L1862	VP-XF100K0000	J	Peaking 10μH	AB					
L1863	VP-XF100K0000	J	Peaking 10μH	AB					
CAPACITORS									
<i>[EL.... Electrolytic]</i>									
C1721	VCE9GA1HW106M	J	10 50V	EL. (N.P)	AB				
C1722	VCCCCY1HH330J	J	33p 50V	Ceramic	AA				
C1741	VCQYTA1HM473J	J	0.047 50V	Mylar	AA				
C1742	VCEA0A1HW105M	J	1 50V	EL.	AB				
C1743	VCQYTA1HM472J	J	4700p 50V	Mylar	AB				
C1761	VCQYTA1HM473J	J	0.047 50V	Mylar	AA				
C1762	VCEA0A1HW105M	J	1 50V	EL.	AB				
C1763	VCQYTA1HM682J	J	6800p 50V	Mylar	AB				
C1781	VCEA0A1CW476M	J	47 16V	EL.	AB				
C1791	VCEA0A1AW107M	J	100 10V	EL.	AB				
C1792	VCEA0A1AW107M	J	100 10V	EL.	AB				
C1801	VCKYCY1CB104K	J	0.1 16V	Ceramic	AB				
C1802	VCKYCY1HB103K	J	0.01 50V	Ceramic	AA				
C1803	VCKYCY1HB103K	J	0.01 50V	Ceramic	AA				
C1804	VCKYCY1HF103Z	J	0.01 50V	Ceramic	AA				
C1805	VCEA0A1HW106M	J	10 50V	EL.	AB				
C1806	VCKYCY1CB104K	J	0.1 16V	Ceramic	AB				
C1807	VCKYCY1HB103K	J	0.01 50V	Ceramic	AA				
C1809	VCKYCY1HB103K	J	0.01 50V	Ceramic	AA				
C1810	VCEA0A1CW226M	J	22 16V	EL.	AB				
C1811	VCKYCY1HF103Z	J	0.01 50V	Ceramic	AA				
C1812	VCEA0A1HW106M	J	10 50V	EL.	AB				
C1821	VCKYCY1HF103Z	J	0.01 50V	Ceramic	AA				
C1822	VCEA0A1HW106M	J	10 50V	EL.	AB				
C1841	VCEA0A1HW106M	J	10 50V	EL.	AB				
C1842	VCKYCY1HF103Z	J	0.01 50V	Ceramic	AA				
C1843	VCCCCY1HH680J	J	68p 50V	Ceramic	AA				
C1845	VCKYCY1HB103K	J	0.01 50V	Ceramic	AA				
C1846	VCCCCY1HH151J	J	150p 50V	Ceramic	AA				
C1847	VCKYCY1HB103K	J	0.01 50V	Ceramic	AA				
C1848	VCKYCY1CB104K	J	0.1 16V	Ceramic	AB				
C1849	VCEA0A1HW106M	J	10 50V	EL.	AB				
C1850	VCKYCY1CB104K	J	0.1 16V	Ceramic	AB				
C1851	VCKYCY1HF103Z	J	0.01 50V	Ceramic	AA				
C1861	VCKYCY1CB104K	J	0.1 16V	Ceramic	AB				
C1862	VCKYCY1CB104K	J	0.1 16V	Ceramic	AB				
C1863	VCCCCY1HH101J	J	100p 50V	Ceramic	AA				
C1865	VCYFA1HA154J	J	0.15 50V	Mylar	AC				
C1866	VCQYTA1HM103J	J	0.01 50V	Mylar	AA				
C1867	VCKYCY1CB104K	J	0.1 16V	Ceramic	AB				
C1868	VCYFA1HA474J	J	0.47 50V	Mylar	AC				
C1869	VCKYCY1HF103Z	J	0.01 50V	Ceramic	AA				
C1870	VCEA0A1HW106M	J	10 50V	EL.	AB				
C1871	VCEA0A1HW106M	J	10 50V	EL.	AB				
C1872	VCKYCY1HF103Z	J	0.01 50V	Ceramic	AA				
RESISTORS									
<i>[M-Ox.... Metal Oxide]</i>									
RJ1	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ2	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ4	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ6	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ7	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ8	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ9	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ11	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ12	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ13	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ14	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
RJ15	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
R1721	VRS-CY1JF332J	J	3.3k 1/16W	M-Ox.	AA				
R1722	VRS-CY1JF103J	J	10k 1/16W	M-Ox.	AA				
R1723	VRS-CY1JF822J	J	8.2k 1/16W	M-Ox.	AA				
R1724	VRS-CY1JF222J	J	2.2k 1/16W	M-Ox.	AA				
R1741	VRD-RA2BE102J	J	1k 1/8W	Carbon	AA				
R1742	VRS-CY1JF102J	J	1k 1/16W	M-Ox.	AA				
R1743	VRS-CY1JF151J	J	150 1/16W	M-Ox.	AA				
R1744	VRS-CY1JF122J	J	1.2k 1/16W	M-Ox.	AA				
R1745	VRS-CY1JF474J	J	470k 1/16W	M-Ox.	AA				
R1746	VRS-CY1JF122J	J	1.2k 1/16W	M-Ox.	AA				
R1747	VRD-RA2BE822J	J	8.2k 1/8W	Carbon	AA				
R1761	VRS-CY1JF102J	J	1k 1/16W	M-Ox.	AA				
R1762	VRS-CY1JF151J	J	150 1/16W	M-Ox.	AA				
R1763	VRS-CY1JF102J	J	1k 1/16W	M-Ox.	AA				
R1764	VRS-CY1JF122J	J	1.2k 1/16W	M-Ox.	AA				
R1765	VRS-CY1JF474J	J	470k 1/16W	M-Ox.	AA				
R1766	VRS-CY1JF122J	J	1.2k 1/16W	M-Ox.	AA				
R1791	VRD-RA2BE151J	J	150 1/8W	Carbon	AA				
R1801	VRS-CY1JF473J	J	47k 1/16W	M-Ox.	AA				
R1821	VRS-CY1JF123J	J	12k 1/16W	M-Ox.	AA				
R1822	VRS-CY1JF103J	J	10k 1/16W	M-Ox.	AA				
R1823	VRS-CY1JF183J	J	18k 1/16W	M-Ox.	AA				
R1825	VRS-CY1JF183J	J	18k 1/16W	M-Ox.	AA				
R1828	VRS-CY1JF153J	J	15k 1/16W	M-Ox.	AA				
R1831	VRS-CY1JF332J	J	3.3k 1/16W	M-Ox.	AA				
R1832	VRS-CY1JF682J	J	6.8k 1/16W	M-Ox.	AA				
R1833	VRS-CY1JF272J	J	2.7k 1/16W	M-Ox.	AA				
R1834	VRS-CY1JF222J	J	2.2k 1/16W	M-Ox.	AA				
R1841	VRS-CY1JF153J	J	15k 1/16W	M-Ox.	AA				
R1842	VRS-CY1JF471J	J	470 1/16W	M-Ox.	AA				
R1843	VRS-CY1JF391J	J	390 1/16W	M-Ox.	AA				
R1861	VRS-CY1JF153J	J	15k 1/16W	M-Ox.	AA				
R1862	VRS-CY1JF102J	J	1k 1/16W	M-Ox.	AA				
R1863	VRS-CY1JF102J	J	1k 1/16W	M-Ox.	AA				
R1864	VRS-CY1JF221J	J	220 1/16W	M-Ox.	AA				
R1865	VRS-CY1JF474J	J	470k 1/16W	M-Ox.	AA				
R1866	VRS-CY1JF104J	J	100k 1/16W	M-Ox.	AA				
R1867	VRS-CY1JF202J	J	2k 1/16W	M-Ox.	AA				
R1868	VRS-CY1JF510J	J	51 1/16W	M-Ox.	AA				
R1871	VRS-CY1JF000J	J	0 1/16W	M-Ox.	AA				
R1881	VRS-CY1JF473J	J	47k 1/16W	M-Ox.	AA				
R1882	VRS-CY1JF223J	J	22k 1/16W	M-Ox.	AA				
R1883	VRS-CY1JF123J	J	12k 1/16W	M-Ox.	AA				
R1884	VRS-CY1JF101J	J	100 1/16W	M-Ox.	AA				
R1885	VRS-CY1JF473J	J	47k 1/16W	M-Ox.	AA				
R1886	VRS-CY1JF223J	J	22k 1/16W	M-Ox.	AA				
R1887	VRS-CY1JF123J	J	12k 1/16W	M-Ox.	AA				

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-R: DUNTKA533WEA1 P-IN-P UNIT					PWB-S: DUNTKB224WEA2 MTS MODULE UNIT				
R1889	VRD-RA2BE101J	J	100 1/8W Carbon	AB	INTEGRATED CIRCUITS				
MISCELLANEOUS PARTS					IC3001	VHiCXA2074Q-1	J	CXA2074Q	AY
P1701	QPLGZ0810CEZZ	J	Plug, 8-pin	AD	CAPACITORS				
P1702	QPLGZ0610CEZZ	J	Plug, 6-pin	AB	<i>[EL... Electrolytic]</i>				
P1703	QPLGZ0810CEZZ	J	Plug, 8-pin	AD	C3001	VCE9GA1HW475M	J	4.7 50V EL. (N.P)	AB
SLD1801	PSLDM0012MEFW	J	Shield	AD	C3002	VCKYCY1HB562K	J	5600p 50V Ceramic	AA
					C3003	VCQYTA1HM123J	J	0.012 50V Mylar	AA
					C3004	VCEA0A1HW105M	J	1 50V EL.	AB
					C3005	VCE9GA1HW475M	J	4.7 50V EL. (N.P)	AB
					C3006	VCEA0A1HW106M	J	10 50V EL.	AB
					C3007	VCEA0A1HW475M	J	4.7 50V EL.	AB
					C3008	VCKYCY1HF103Z	J	0.01 50V Ceramic	AA
					C3009	VCEA0A1CW227M	J	220 16V EL.	AC
					C3010	VCE9GA1HW475M	J	4.7 50V EL. (N.P)	AB
					C3011	VCEA0A1HW475M	J	4.7 50V EL.	AB
					C3012	VCE9GA1HW475M	J	4.7 50V EL. (N.P)	AB
					C3013	VCKYCY1HB272K	J	2700p 50V Ceramic	AA
					C3014	VCQYTA1HM473J	J	0.047 50V Mylar	AA
					C3015	VCEACA1HC335K	J	3.3 50V EL.	AC
					C3016	VCE9GA1HW475M	J	4.7 50V EL. (N.P)	AB
					C3017	VCEACA1CC106K	J	10 16V EL.	AC
					C3018	VCEA0A1HW105M	J	1 50V EL.	AB
					C3029	VCQYTA1HM682J	J	6800p 50V Mylar	AB
					C3030	VCQYTA1HM682J	J	6800p 50V Mylar	AB
					C3031	VCQYTA1HM473J	J	0.047 50V Mylar	AA
					C3032	VCQYTA1HM473J	J	0.047 50V Mylar	AA
					RESISTORS				
					<i>[M-Ox... Metal Oxide]</i>				
					R3001	VRD-RA2BE221J	J	220 1/8W Carbon	AA
					R3002	VRD-RA2BE221J	J	220 1/8W Carbon	AA
					R3003	VRS-CY1JF105J	J	1M 1/16W M-Ox.	AA
					R3004	VRS-CY1JF104J	J	100k 1/16W M-Ox.	AA
					R3005	VRS-CY1JF623J	J	62k 1/16W M-Ox.	AA
					R3007	VRS-CY1JF332J	J	3.3k 1/16W M-Ox.	AA
					R3008	VRS-CY1JF302J	J	3k 1/16W M-Ox.	AA
					R3010	VRS-CY1JF392J	J	3.9k 1/16W M-Ox.	AA
					R3011	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA
					R3012	VRS-CY1JF102J	J	1k 1/16W M-Ox.	AA
					R3301	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
					MISCELLANEOUS PARTS				
					P3001	QPLGN0242FJ00	J	Plug, 10-pin(EA)	AE

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
MISCELLANEOUS PARTS					CABINET PARTS				
△ ACC701	QACCD3065CESA	J	AC Cord	AN	1	CCABAA059WEH0		Front Cabinet Ass'y	BC
	or				1-1	Not Available	-	Front Cabinet	—
SP1	VSP9050PB368A		Speaker(L), 8 ohm	AE	1-2	GCOVA0121GJSA		RC, LED Cover	AC
SP1	VSP9050PB368A		Speaker(R), 8 ohm	AE	1-3	GDORFA004WJKA		Door	
	LHLDK0014PEZZ	R	AC Cord Holder	AD	1-4	GCOVA0116GJKA		Door Cover	
	LHLDW1002PEZZ	R	Wire Holder, x3	AB	1-5	HBDGB1009MESB		Badge, "SHARP"	AG
	LHLDW1002PEZZ	R	Wire Holder	AB	1-6	HiNDP0105GJKZ		Indication Plate	AE
	LHLDW1003PEZZ	R	Wire Holder, x3	AA	1-7	JBTN-0138GJKB		Button,Power	AC
	LHLDW1033PEZZ	R	Wire Holder, x2	AA	1-8	JBTN-0139GJSB		Button, CH-Up/Down, VOL-Up/Down, Menu	AE
	LHLDW1060CEZZ	J	Wire Holder, x3	AB	2	GCABB0154GJKA		Rear Cabinet	AY
	LHLDW1070PEKZ	R	Wire Holder	AD					
	LHLDZ1003GJZZ	X	Wire Holder, x2	AC					
	LHLDZ1037MEZZ	X	Anode Clamp Holder, x2	AD					
	LX-TZ0104GJFD	X	CRT Screw, x4	AF					
	LX-TZ3004CEFD	J	Screw, x4	AA					
	LX-WZ0112GJFD		CRT Washer, x4	AA					
	PSPAN0103GJZZ		Spacer	AB					
	QCNW-0135GJZZ		Connecting Cord(EJ)	AH					
	QCNW-0136GJZZ		Connecting Cord(S)	AC					
	QCNW-0161GJZZ		Connecting Cord(GBN)	AG					
	QCNW-0167GJZZ		Connecting Cord	AC					
	QCNW-A383WJZZ	X	IF Cable	AH					
	QCNW-A434WJZZ	X	Connecting Cord(YBN)	AF					
	QCNW-A476WJZZ		Connecting Cord	AB					
	TCAUH3045GJZZ		Caution Card	AB					
	TLABM0002GJZZ	X	Model Label	AB					
	TLABZ0152GJZZ	X	Feature Label	AD					
	XTASD30P12000	J	Screw	AA					
	XTASD30P12000	J	Screw, x4	AA					
	XTASD40P20000	J	Screw	AA					

CABINET PARTS LOCATION

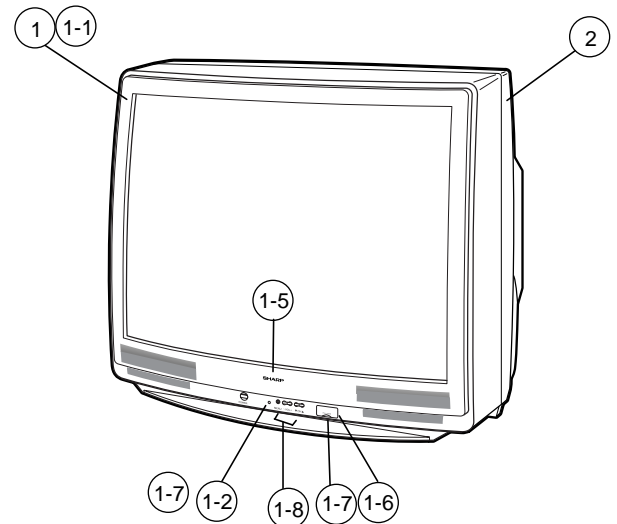


SUPPLIED ACCESSORIES

RRMCGA036WJSB		Infrared R/C Unit	AV
TGAN-0001GJZZ	X	Guarantee Card	AB
TiNS-A178WJZZ		Operation Manual	AH

PACKING PARTS (NOT REPLACEMENT ITEM)

SPAKCA100WJZZ	-	Packing Case	—
SPAKP0109GJZZ	-	Wrapping Paper	—
SPAKX0134GJZZ	-	Buffer Material	—
SSAKA0101GJZZ	-	Polyethylene Bag	—
TLABZA004WJZZ	-	Carton Label	—

PACKING OF THE SET

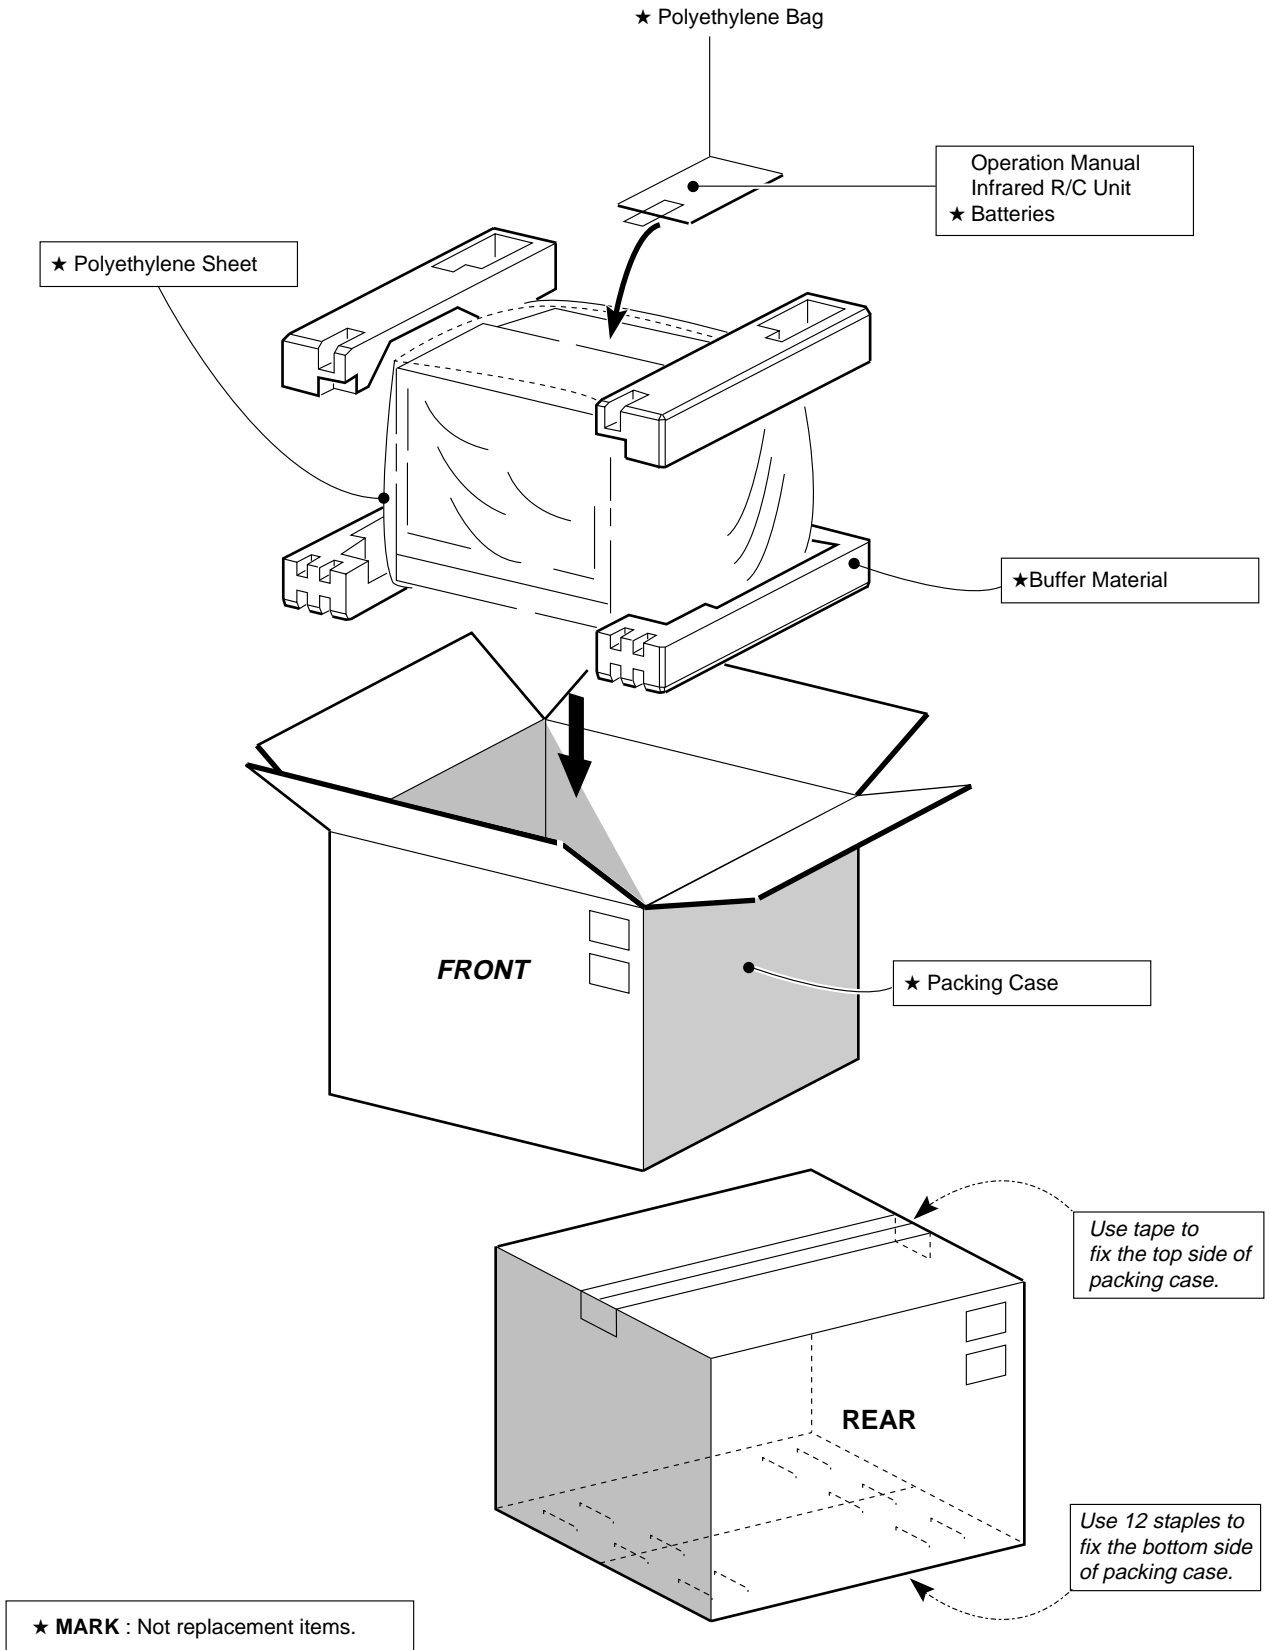

SHARP

COPYRIGHT © 2002 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission of the publisher.