

Features

- Low Cost
- Compact Size
- Gold Plated Solder Pins
- Rugged Die cast Construction
- RoHS* Compliant

Description and Applications

M/A-COM's MACS-007800-0M1R00 is a RoHS Compliant K-Band Local Oscillator consisting of a Gunn Diode oscillator assembled into a die cast waveguide package.

These Local Oscillators are well suited for high volume applications where small size and reliability are required. This local oscillator is an inexpensive low power transmitter suitable for use in CW Doppler radar systems. Typical applications include, Speed radars, traffic control, and industrial process control.

Product Specifications

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Operating Frequency	+25 °C	GHz	24.100	24.125	24.150
Output Power	+25 °C	mW	5.0		
Operating Current	+25 °C	mA	60	85	100
Operating Voltage	+25 °C	VDC		5.0	

Operating temperature to full specifications -30°C to +70°C


Absolute Maximum Ratings ¹

Parameter	Maximum Ratings
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C
Incident RF Input Power	+20 dBm
DC Input (Gunn Diode)	+5.5VDC
Soldering Temperature	+260 °C max.

1. Exceeding these limits may cause permanent damage.

**Note: Device is ESD Sensitive.
Proper ESD Precautions should be
used when handing this Device..**


Package Outline

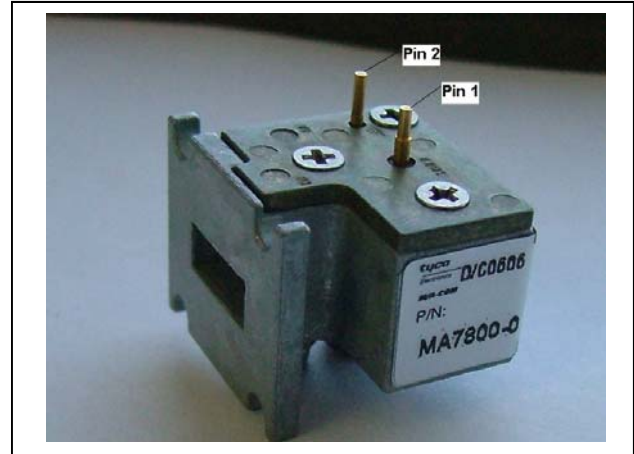

PIN Configuration

Pin	Function
1	DC Input
2	GND

Functional Block Diagram

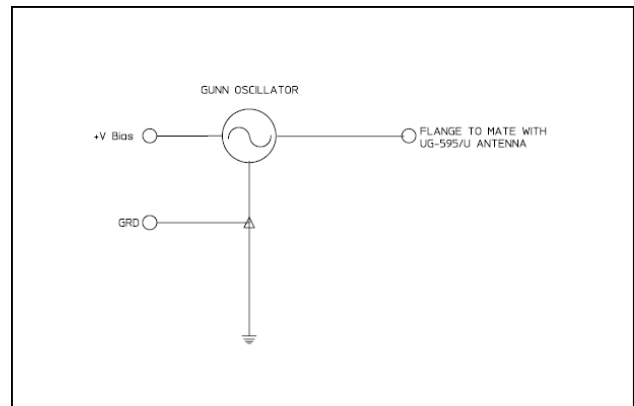

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.


ADVANCED: Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.




• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

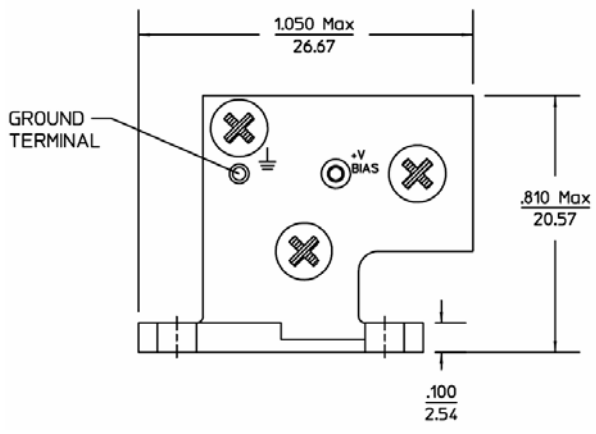

Label Information

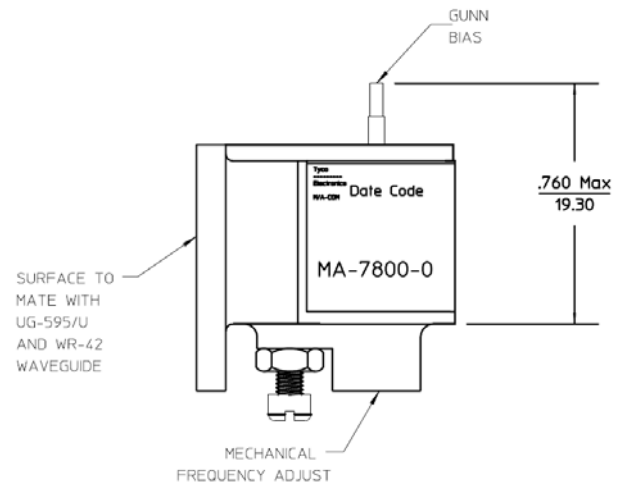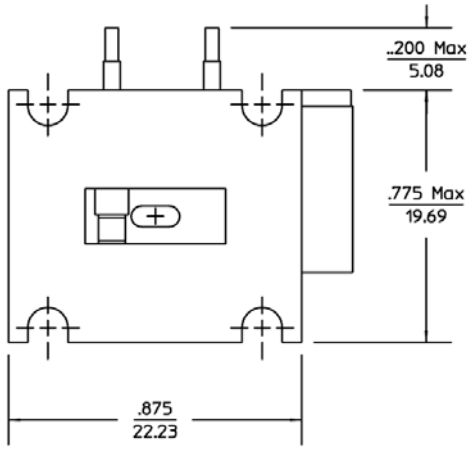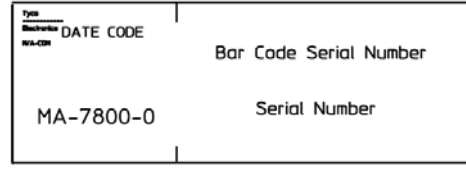

ADVANCED: Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.
 M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.