


KDL-32V2000/40V2000/46V2000

SERVICE MANUAL

AUS Model

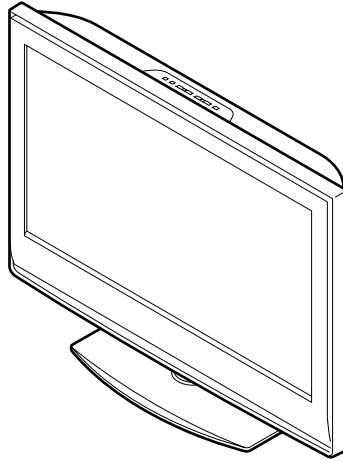

WAX2 CHASSIS

SPECIFICATIONS

Display Unit

Power Requirements:

220–240 V AC, 50 Hz

Screen Size:

KDL-46V2000: 46 inches

KDL-40V2000: 40 inches

KDL-32V2000: 32 inches

Display Resolution:

1,366 dots (horizontal) × 786 lines (vertical)

Power Consumption:

Indicated on the rear of the TV

Dimensions (w × h × d):

KDL-46V2000:

Approx. 1120 × 805 × 334 mm (with stand)

Approx. 1120 × 755 × 116 mm (without stand)

KDL-40V2000:

Approx. 988 × 716 × 334 mm (with stand)

Approx. 988 × 664 × 103 mm (without stand)

KDL-32V2000:

Approx. 792 × 593 × 219 mm (with stand)

Approx. 792 × 546 × 99 mm (without stand)

Weight:

KDL-46V2000:

Approx. 35 kg (with stand)

Approx. 29 kg (without stand)

KDL-40V2000:

Approx. 28 kg (with stand)

Approx. 22 kg (without stand)

KDL-32V2000:

Approx. 18 kg (with stand)

Approx. 16 kg (without stand)

Panel System

LCD (Liquid Crystal Display) Panel

TV System

Analog: B/G, I, D/K, M

Digital: DVB-T

Color/Video System

Analog: PAL, PAL60, SECAM, NTSC4.43, NTSC 3.58

Digital: MP@HL and MP@ML

Antenna

75 ohm external terminals

Channel Coverage

Analog: B/G

VHF: E2 to E12 / UHF: E21 to E69 /

CATV: S01 to S03, S1 to S41

VHF: 0 to 12, 5A, 9A / UHF: 28 to 69 /

CATV: S01 to S03, S1 to S44 (Australia only)

VHF: 1 to 11 / UHF: 21 to 69 /

CATV: S01 to S03, S1 to S41 (New Zealand only)

I

UHF: B21 to B69 / CATV: S01 to S03, S1 to S41

D/K

VHF: C1 to C12, R1 to R12 /

UHF: C13 to C57, R21 to R60 /

CATV: S01 to S03, S1 to S41, Z1 to Z39

M

VHF: A2 to A13 / UHF: A14 to A79 /

CATV: A-8 to A-2, A to W+4, W+6 to W+84

Digital: VHF/UHF

LCD Digital Color TV

SONY®

If you need more information on Computer and Electronic Repair, please visit these websites to improve yourself.

<http://www.fastrepairguide.com>


<http://www.protech2u.com>

<http://www.plasma-television-repair.com>

<http://www.lcd-television-repair.com>

Happy Repairing!!

Highly Recommended Repair Ebook:




If you're a LCD Monitor repairer, then this is the best guide for you. Why? Because, the author revealed all his LCD Monitor Repairing secrets for you. I think, with just few Repair tips you learned from this guide you will get back your investment!

[Click Here to read](#) more.



This eBook will show you how to test the electronic component correctly and accurately. Some of you may say that I don't need this eBook because it is too simple! Do you know that, in fact there is lots of testing electronic components secrets I have learned from this guide? Do you know how to test a 'TRIAC' correctly and accurately? If you answer no then I guess you have to get this eBook. [Click Here to read more.](#)



Are you tired of searching the service manuals to look for the value of a burnt resistor? If the answer is YES, then this eBook is a 'must have' guide for you. You can save a lot of time and be able to repair customer's Electronic equipment with burnt resistors in it.

[Click here to read more.](#)

Terminals

S VIDEO 1/2: S-Ⓜ

S VIDEO (4-pin mini DIN): S-Ⓜ

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative

C: 0.286 Vp-p (Burst signal), 75ohms

VIDEO IN 1/2/3: Ⓜ

VIDEO: Ⓜ

1 Vp-p, 75 ohms unbalanced, sync negative

AUDIO: Ⓜ

500 mVrms

Impedance: 47 kilohms

HD/DVD IN: Ⓜ

Y, PB/CB, PR/CR (Component Video):

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative

PB/CB: 0.7 Vp-p, 75 ohms

PR/CR: 0.7 Vp-p, 75 ohms

Signal format: 480i, 576i, 480p, 576p, 720p, 1080i

AUDIO: Ⓜ

500 mVrms

Impedance: 47 kilohms

VIDEO OUT: Ⓜ

VIDEO: Ⓜ

1 Vp-p, 75 ohms unbalanced, sync negative

AUDIO: Ⓜ

More than 1 Vrms at the maximum volume setting
(Variable)

More than 500 mVrms (Fixed)

DIGITAL OUT (OPTICAL) (DIGITAL OUT (OPTICAL) jack)
HDMI IN

Video: 1080i, 720p, 576p, 576i, 480p, 480i

Audio: Two channel linear PCM

33, 44.1 and 48 kHz, 16, 20 and 24 bits

PC: Ⓜ

D-sub 15-pin, analog RGB, 0.7 Vp-p,

75 ohms, positive

See the PC Input Signal Reference Chart on page 38.

AUDIO: Ⓜ

Stereo minijack, 0.5 Vrms, 1 kilohm

Headphones Ⓜ

Stereo minijack

Sound Output

10 W + 10 W

Supplied Accessories

Refer to "1: Checking the accessories" on page 4.

Optional Accessories

- Wall-Mount Bracket
- SU-WL51 (for KDL-46V2000/KDL-40V2000)
- SU-WL31 (for KDL-32V2000)

Design and specifications are subject to change without notice.

PC Input Signal Reference Chart

| Signals | Horizontal (Pixel) | Vertical (Line) | Horizontal frequency (kHz) | Vertical frequency (Hz) | Standard |
|---------|--------------------|-----------------|----------------------------|-------------------------|------------------------|
| VGA | 640 | 480 | 31.5 | 60 | VGA |
| | 640 | 480 | 37.5 | 75 | VESA |
| | 720 | 400 | 31.5 | 70 | VGA-T |
| SVGA | 800 | 600 | 37.9 | 60 | VESA Guidelines |
| | 800 | 600 | 46.9 | 75 | VESA |
| XGA | 1024 | 768 | 48.4 | 60 | VESA Guidelines |
| | 1024 | 768 | 56.5 | 70 | VESA |
| | 1024 | 768 | 60 | 75 | VESA |
| WXGA | 1280 | 768 | 47.4 | 60 | VESA |
| | 1280 | 768 | 47.8 | 60 | VESA |
| | 1360 | 768 | 47.7 | 60 | VESA |

- This TV's PC input does not support Sync on Green or Composite Sync.
- This TV's PC input does not support interlaced signals.
- For the best picture quality, it is recommended to use the signals (boldfaced) in the above chart with a 60 Hz vertical frequency from a personal computer. In plug and play, signals with a 60 Hz vertical frequency will be selected automatically.

i-Plate Display Language Code

| Code | Language | Code | Language | Code | Language | Code | Language |
|------|------------|------|----------|------|------------|------|-----------|
| Af | Afrikaans | El | Greek | Ita | Italian | Spa | Spanish |
| Afr | Afrikaans | Ell | Greek | Jpn | Japanese | Tam | Tamil |
| Ar | Arabic | En | English | Kan | Kannada | Tel | Telugu |
| Ara | Arabic | Eng | English | Kor | Korean | Zho | Chinese |
| Aus | Australian | Fr | French | Mal | Malayalam | U1 | Unknown 1 |
| Ben | Bengali | Fra | French | Nl | Dutch | U2 | Unknown 2 |
| Bn | Bengali | Fre | French | Nld | Dutch | | |
| Chi | Chinese | Gem | German | Pan | Panjabi | | |
| De | German | Ger | German | Por | Portuguese | | |
| Deu | German | Gre | Greek | Raj | Rajasthani | | |
| Dut | Dutch | Hi | Hindi | Rus | Russian | | |
| Egy | Egyptian | Hin | Hindi | San | Sanskrit | | |

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or touching high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers’ instructions to use these instructions.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low voltage scale.
The Simpson’s 250 and Sanwa SH-63TRD are examples of passive VOMs that are suitable. Nearly all battery-operated digital multimeters that have a 2 VAC range are suitable (see Figure A).

How to Find a Good Earth Ground

A cold-water pipe is a guaranteed earth ground; the cover-plate retaining screw on most AC outlet boxes is also at earth ground. If the retaining screw is to be used as your earth ground, verify that it is at ground by measuring the resistance between it and a cold-water pipe with an ohmmeter. The reading should be zero ohms.

If a cold-water pipe is not accessible, connect a 60- to 100-watt trouble- light (not a neon lamp) between the hot side of the receptacle and the retaining screw. Try both slots, if necessary, to locate the hot side on the line; the lamp should light at normal brilliance if the screw is at ground potential (see Figure B).

Leakage Test

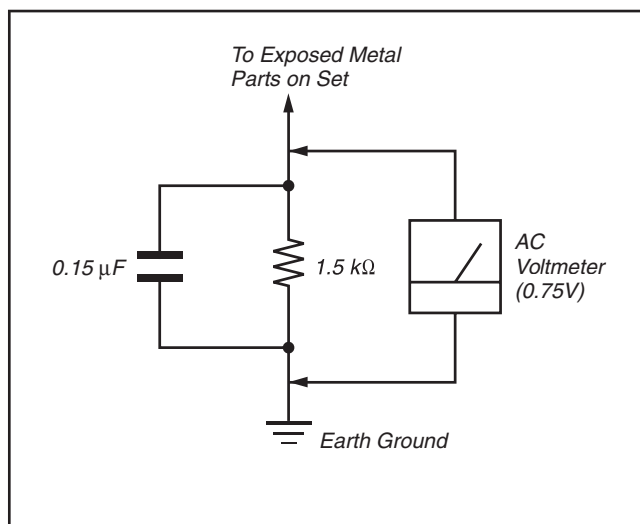


Figure A. Using an AC voltmeter to check AC leakage.

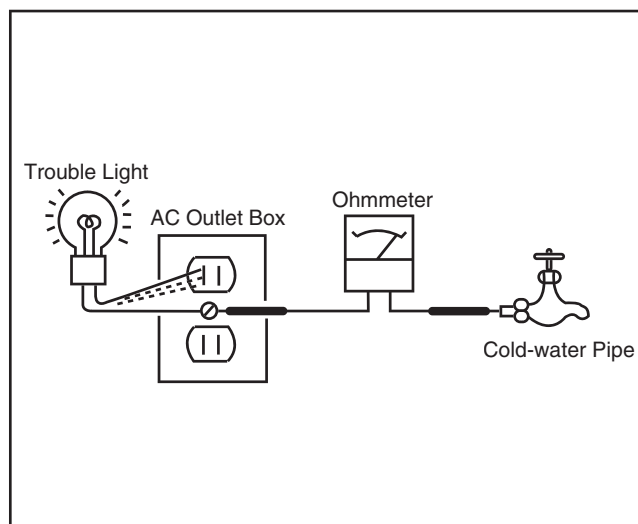


Figure B. Checking for earth ground.


TABLE OF CONTENTS

| | | | |
|--|------------|--|------------|
| 1. DISASSEMBLY | 1-1 | 3. EXPLODED VIEWS | 3-1 |
| 1-1. KDL-32V2000 | 1-1 | 3-1. KDL-32V2000 | 3-2 |
| 1-1-1. REAR COVER REMOVAL | 1-1 | 3-1-1. REAR COVER ASSY AND STAND ASSY .. | 3-2 |
| 1-1-2. STAND ASSY AND VESA BRACKET REMOVAL | 1-1 | 3-1-2. H1 AND H2 BOARDS AND FRAME | 3-3 |
| 1-1-3. H1 BOARD REMOVAL | 1-2 | 3-1-3. CHASSIS-1 | 3-4 |
| 1-1-4. H2 BOARD AND SIDE TERMINAL REMOVAL | 1-2 | 3-1-4. CHASSIS-2 | 3-5 |
| 1-1-5. G1 BOARD REMOVAL | 1-3 | 3-1-5. H4 BOARD AND SPEAKER | 3-6 |
| 1-1-6. TOP SHIELD REMOVAL | 1-3 | 3-1-6. BEZEL ASSY AND LCD PANEL | 3-7 |
| 1-1-7. TUG BOARD REMOVAL | 1-4 | 3-2. KDL-40/46V2000 | 3-8 |
| 1-1-8. AG BOARD REMOVAL | 1-4 | 3-2-1. REAR COVER ASSY AND STAND ASSY .. | 3-8 |
| 1-1-9. BU BOARD REMOVAL | 1-5 | 3-2-2. CHASSIA-1 | 3-9 |
| 1-1-10. AC INLET REMOVAL | 1-6 | 3-2-3. CHASSIS-1 | 3-10 |
| 1-1-11. H4 BOARD AND SPEAKER REMOVAL ... | 1-6 | 3-2-4. CHASSIS-2 | 3-11 |
| 1-1-12. LCD PANEL REMOVAL | 1-7 | 3-2-5. SPEAKER AND H4 BOARD | 3-12 |
| 1-2. KDL-40/46V2000 | 1-8 | 3-2-6. BEZEL ASSY AND LCD PANEL | 3-13 |
| 1-2-1. REAR COVER ASSY REMOVAL | 1-8 | 3-3. PACKING MATERIALS (KDL-32V2000) | 3-14 |
| 1-2-2. STAND ASSY AND VESA BRACKET REMOVAL | 1-8 | 3-4. PACKING MATERIALS (KDL-40/46V2000) .. | 3-15 |
| 1-2-3. H1 BOARD REMOVAL | 1-9 | 4. ELECTRICAL PARTS LIST | 4-1 |
| 1-2-4. H2 BOARD REMOVAL | 1-9 | | |
| 1-2-5. G2 BOARD REMOVAL | 1-10 | | |
| 1-2-6. DTT SHIELD REMOVAL | 1-10 | | |
| 1-2-7. TUG BOARD REMOVAL | 1-11 | | |
| 1-2-8. AU BOARD REMOVAL | 1-11 | | |
| 1-2-9. B BOARD REMOVAL | 1-12 | | |
| 1-2-10. AC INLET REMOVAL | 1-13 | | |
| 1-2-11. H4 BOARD AND SPEAKER REMOVAL .. | 1-13 | | |
| 1-2-12. TOP FRAME REMOVAL | 1-14 | | |
| 1-2-13. LCD PANEL REMOVAL | 1-15 | | |
| 2. DIAGRAMS | 2-1 | | |
| 2-1. BLOCK DIAGRAMS | 2-1 | | |
| (1) AG, H2 and H46 Boards | 2-1 | | |
| (2) B, H1, H4 and J Boards | 2-2 | | |
| (3) TUG Board | 2-3 | | |
| (4) G1 Board | 2-4 | | |
| (5) G2A Board | 2-5 | | |
| 2-2. FRAME DIAGRAMS | 2-6 | | |
| (1) KDL-32V2000 | 2-6 | | |
| 2-7 | | | |
| (2) KDL-40/46V2000 | 2-7 | | |
| 2-3. CIRCUIT BOARDS LOCATION | 2-8 | | |
| 2-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS | 2-8 | | |
| (1) AG Board (1/2-2/2) | 2-9 | | |
| (2) B Board (1/12-12/12) | 2-12 | | |
| (3) G1 Board (KDL-32V2000) | 2-26 | | |
| (4) G2A Board (KDL-40/46V2000) | 2-28 | | |
| (5) H1 and H4 Boards | 2-30 | | |
| (6) H2 and H46 Boards | 2-32 | | |
| (7) TUG and J Board | 2-34 | | |
| 2-5. SEMICONDUCTORS | 2-36 | | |


SECTION 1 DISASSEMBLY

1-1. KDL-32V2000

1-1-1. REAR COVER REMOVAL

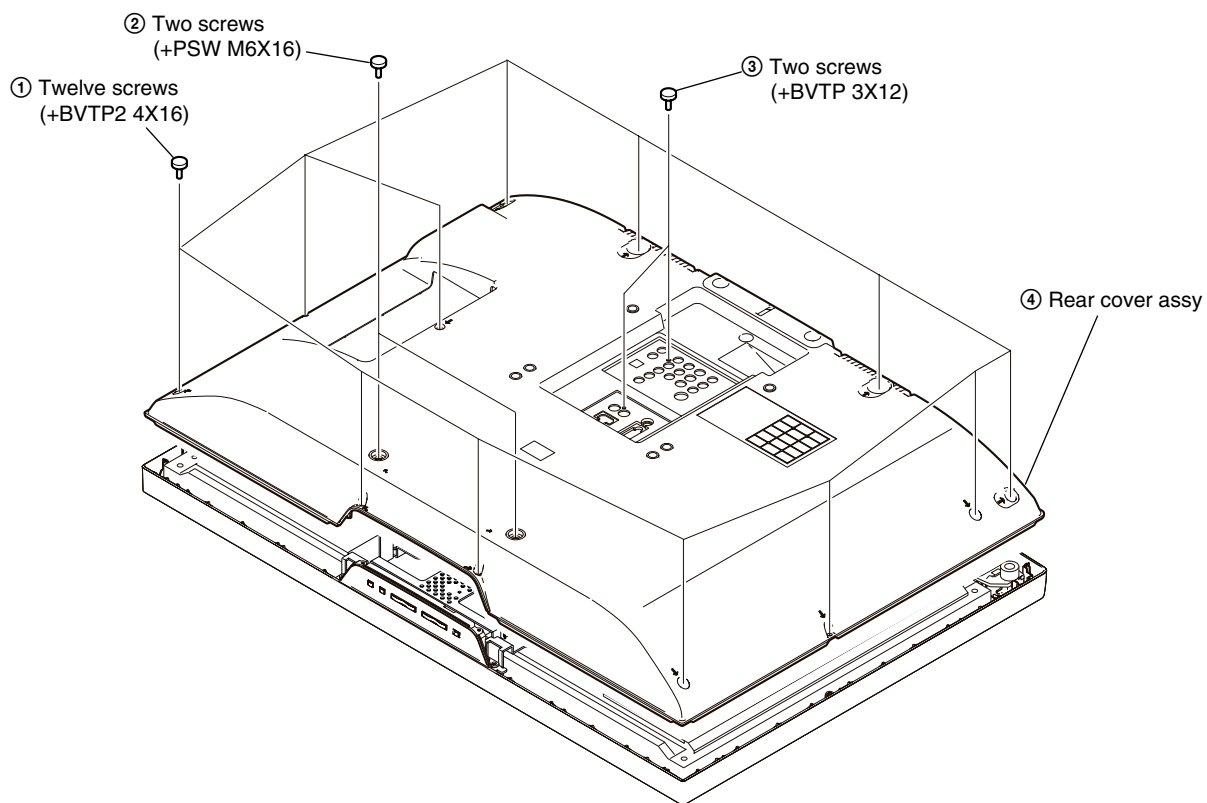


1-1-2. STAND ASSY AND VESA BRACKET REMOVAL

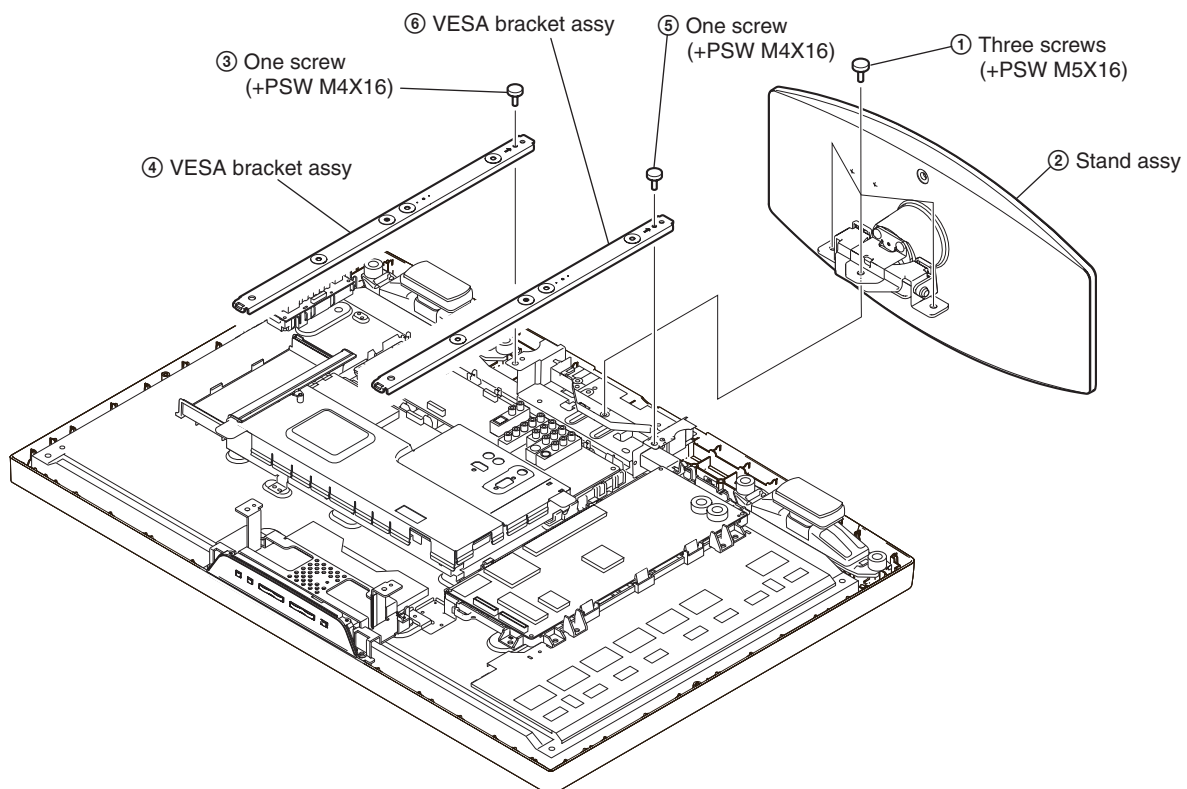


KDL-32V2000

1-1-3. H1 BOARD REMOVAL

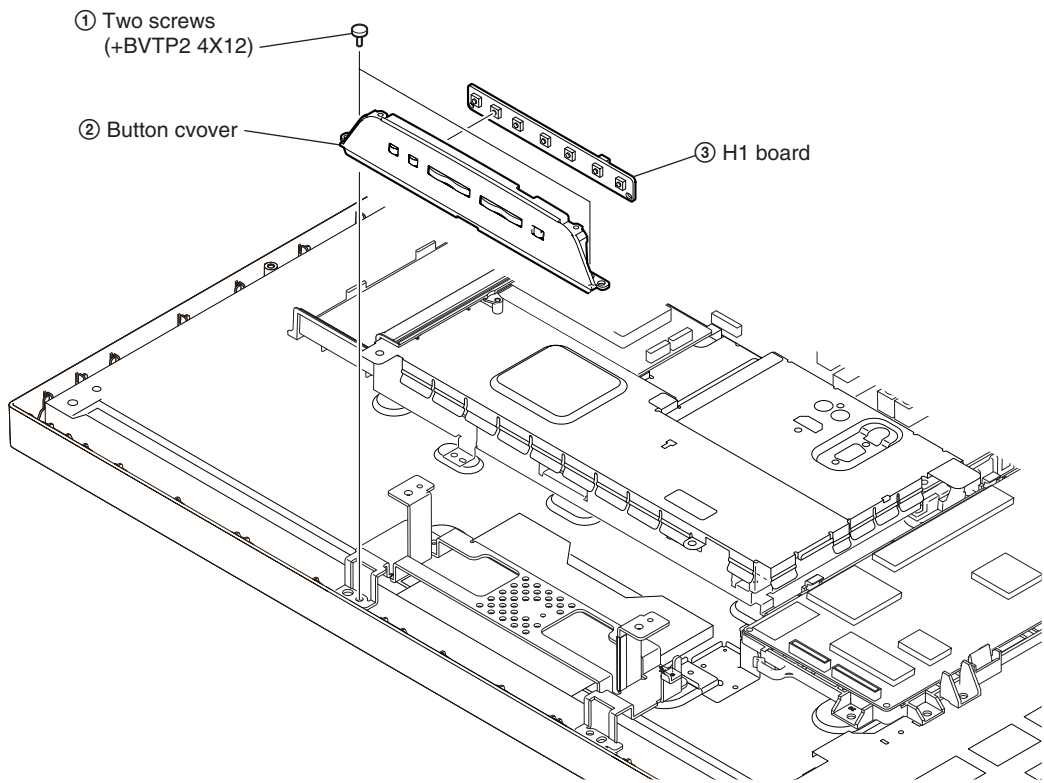


1-1-4. H2 BOARD AND SIDE TERMINAL REMOVAL

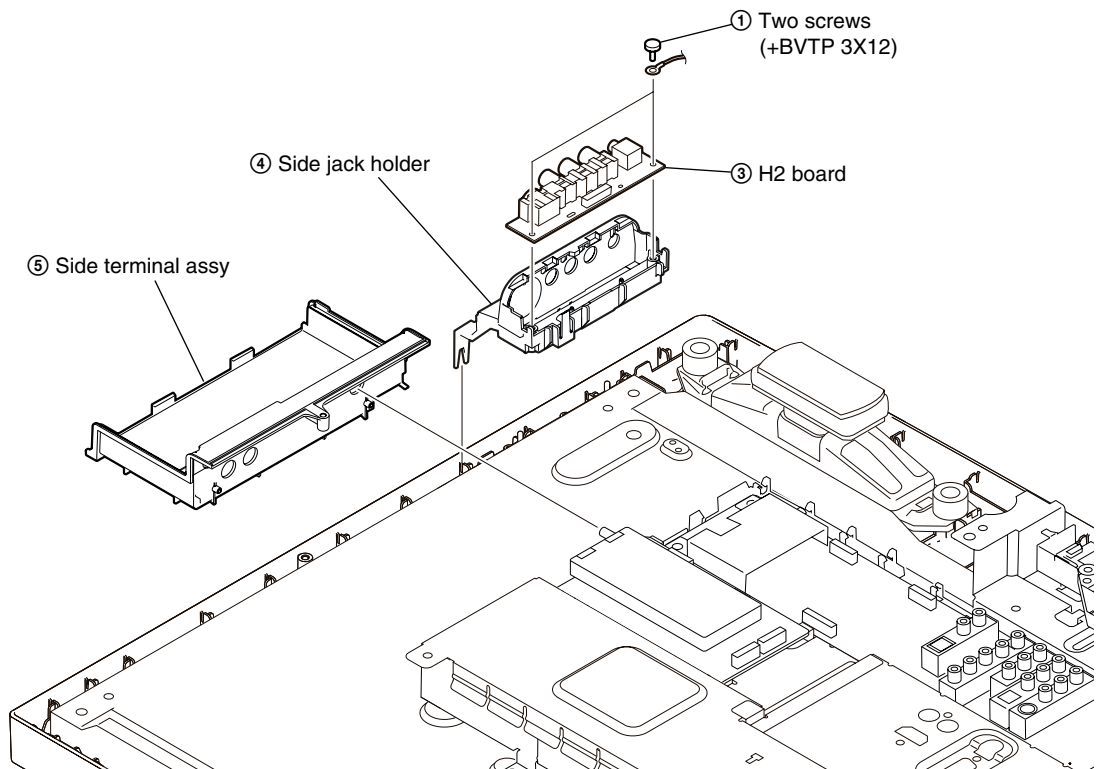


KDL-32V2000


1-1-5. G1 BOARD REMOVAL

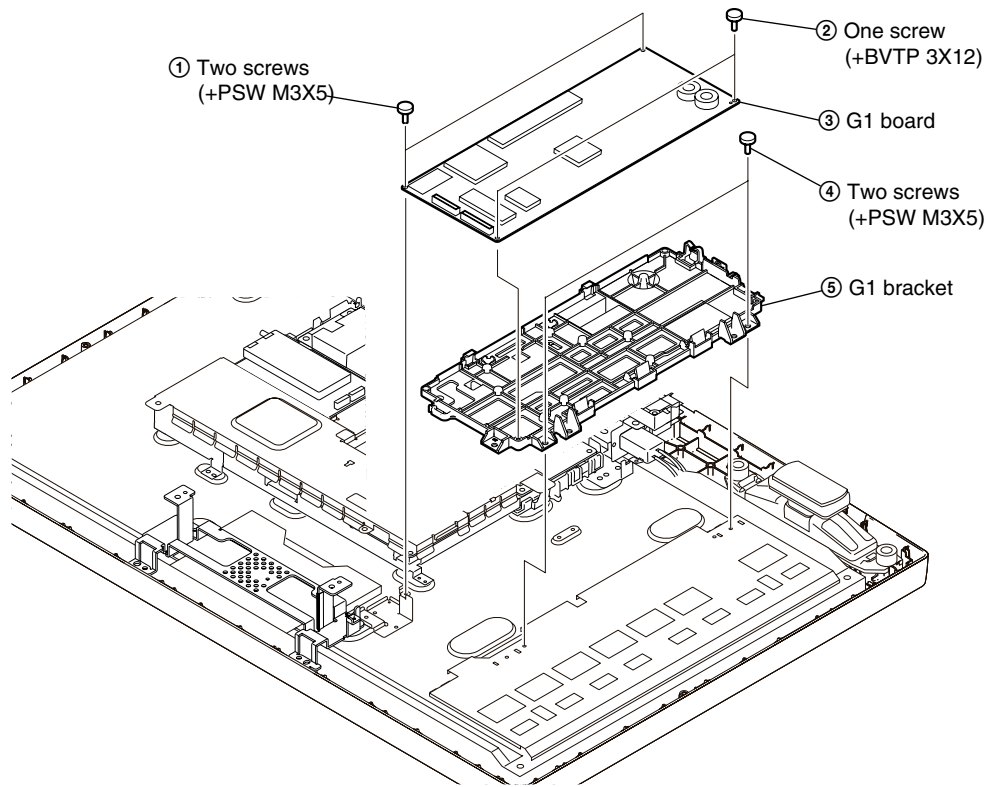


1-1-6. TOP SHIELD REMOVAL

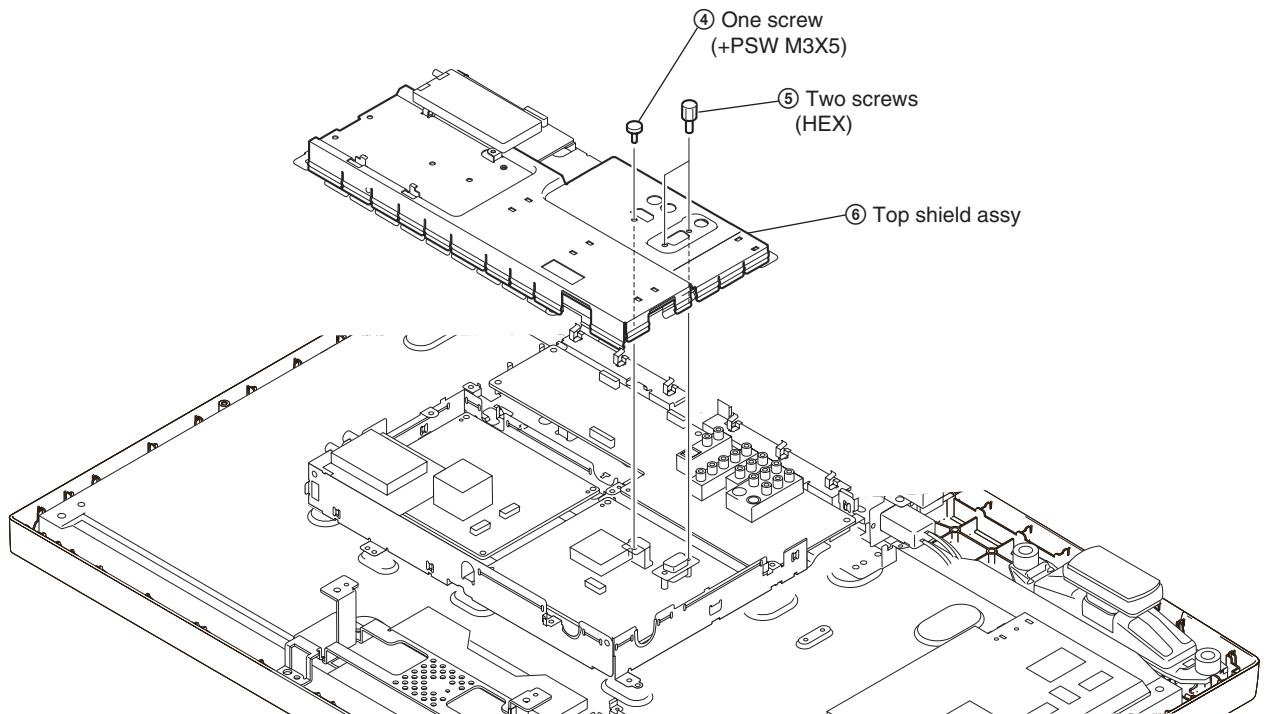


KDL-32V2000
1-1-7. TUG BOARD REMOVAL

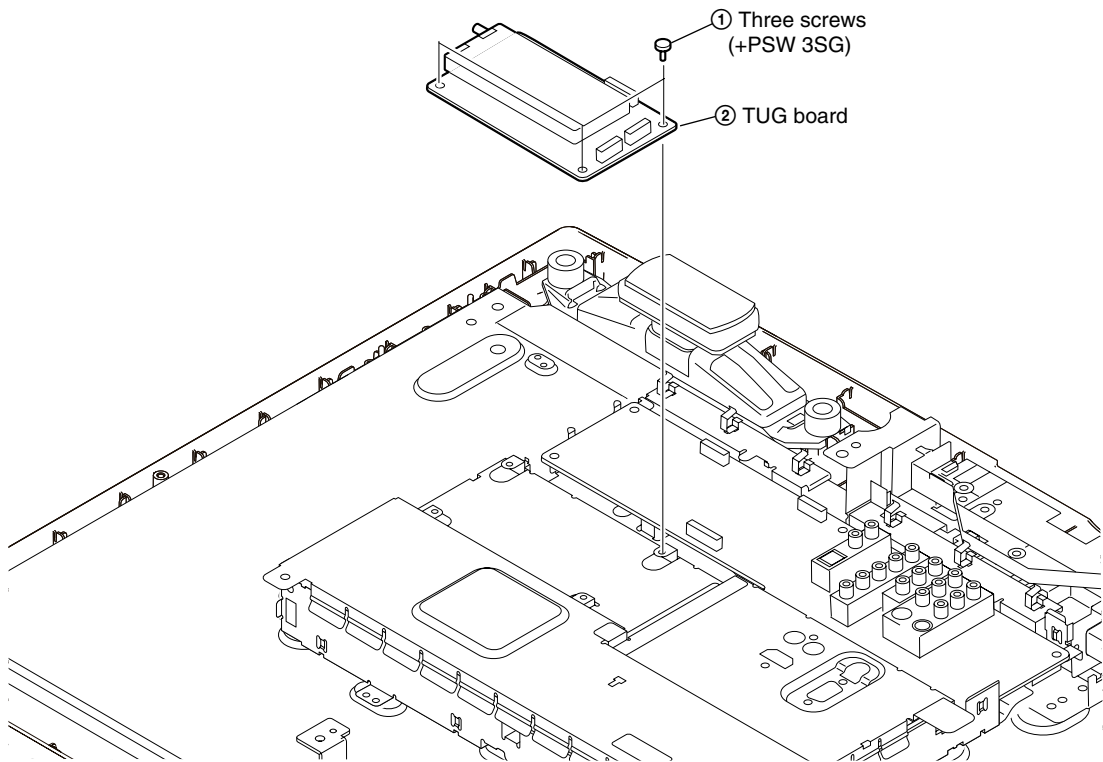

1-1-8. AG BOARD REMOVAL

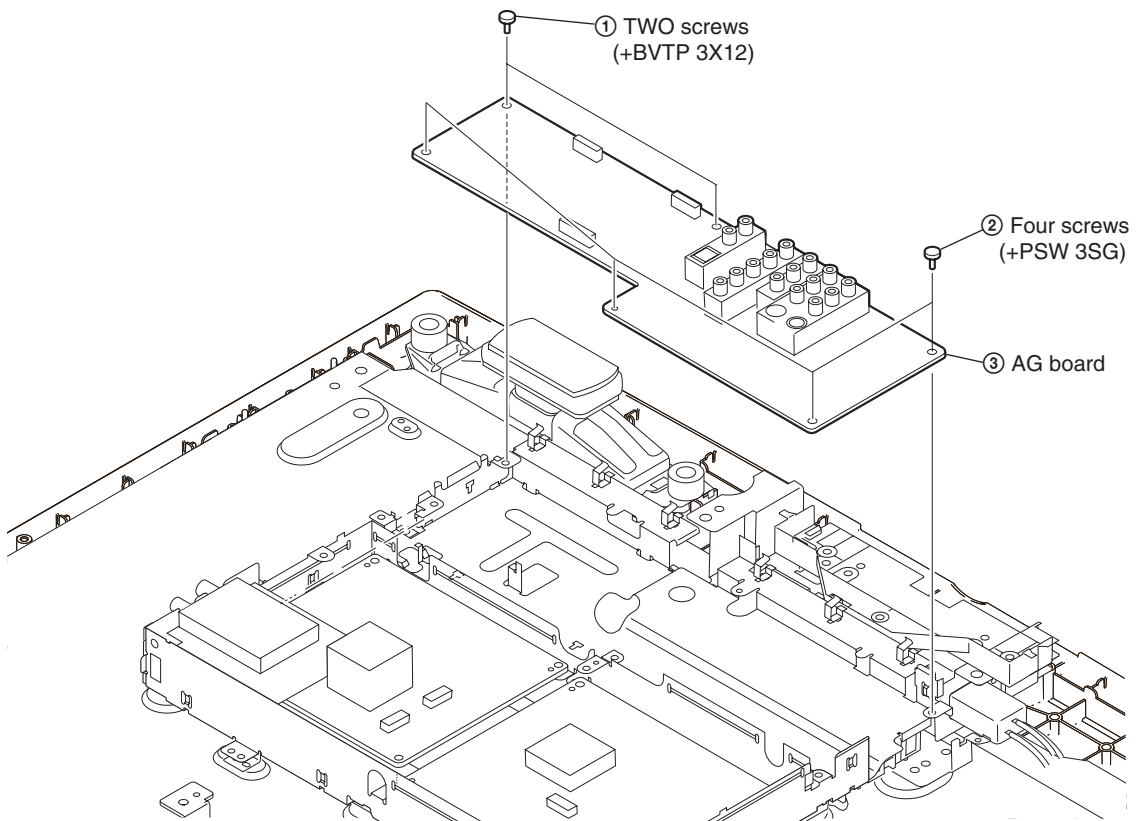


KDL-32V2000
1-1-9. BU BOARD REMOVAL

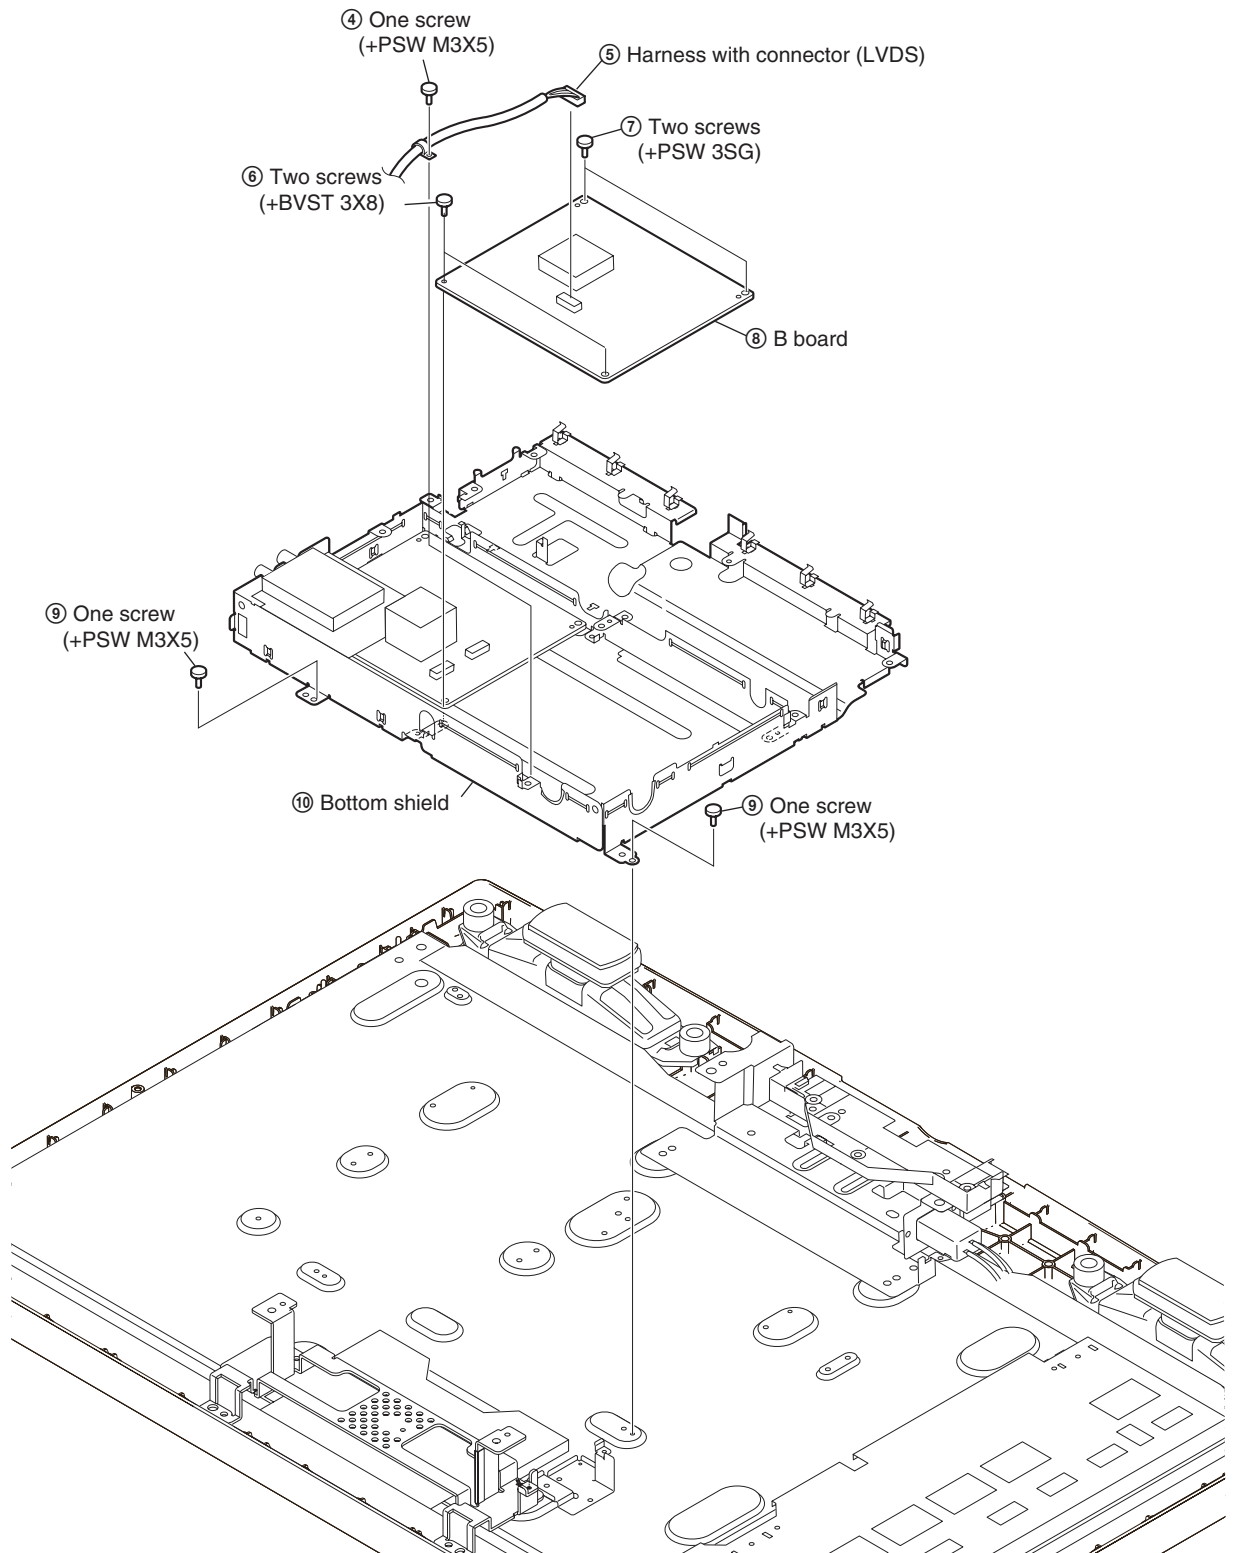


KDL-32V2000


1-1-10. AC INLET REMOVAL

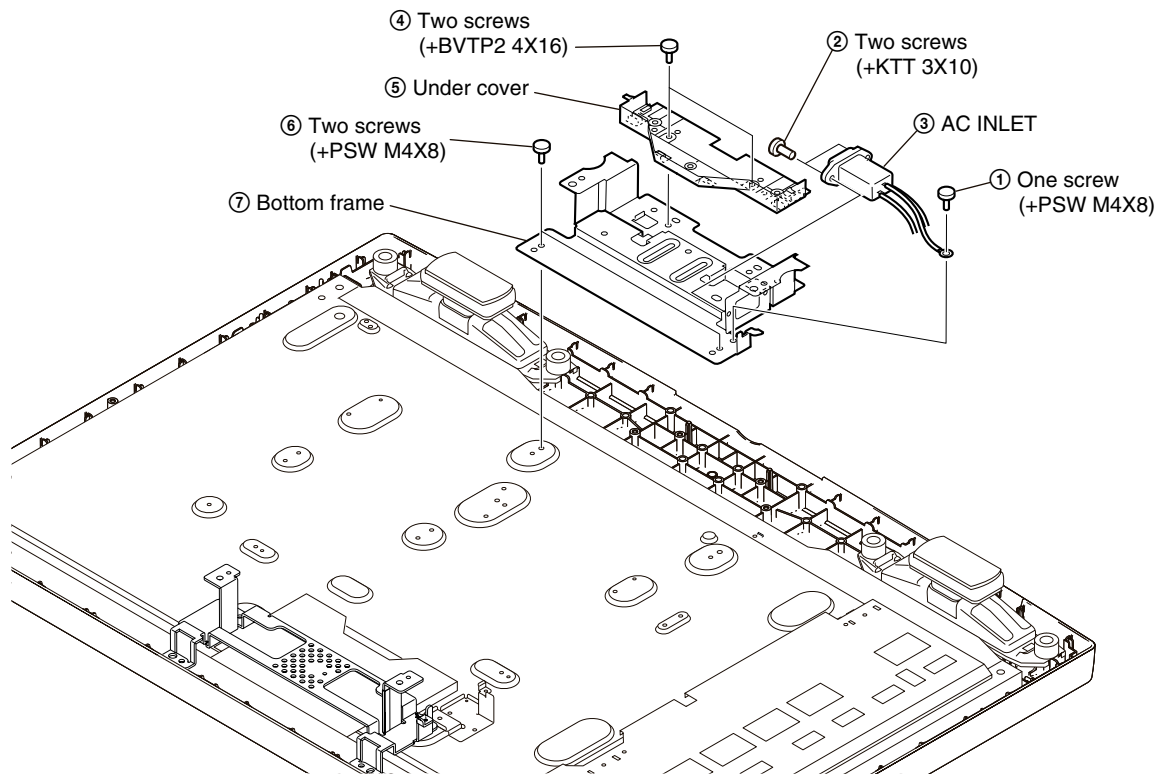

1-1-11. H4 BOARD AND SPEAKER REMOVAL

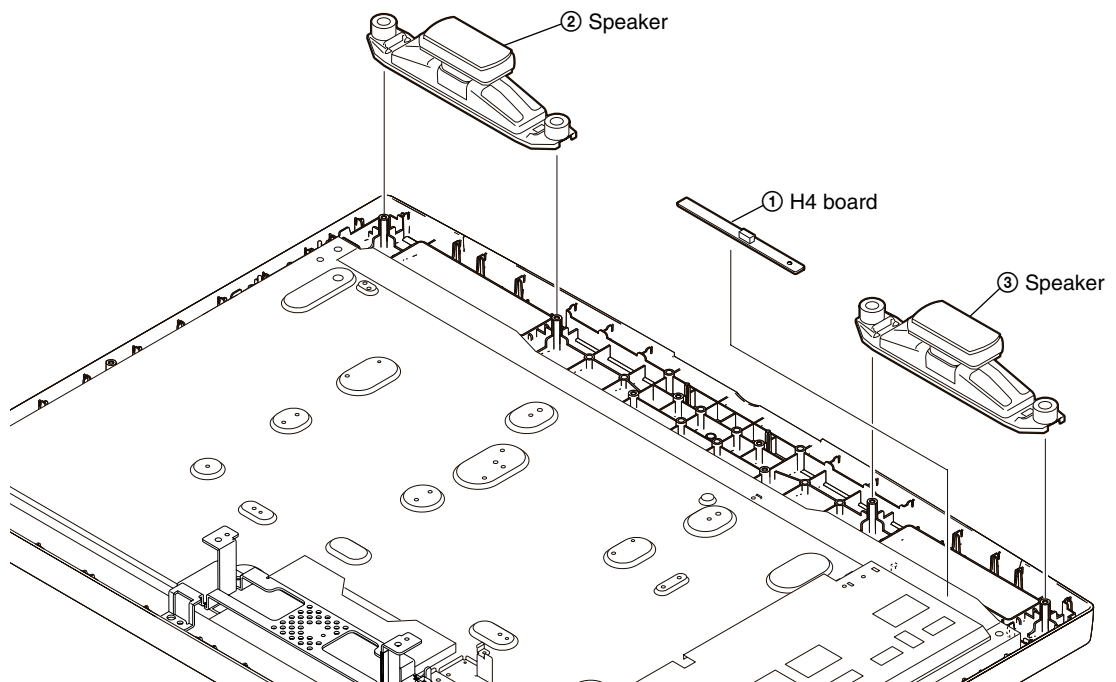


KDL-32V2000
1-1-12. LCD PANEL REMOVAL

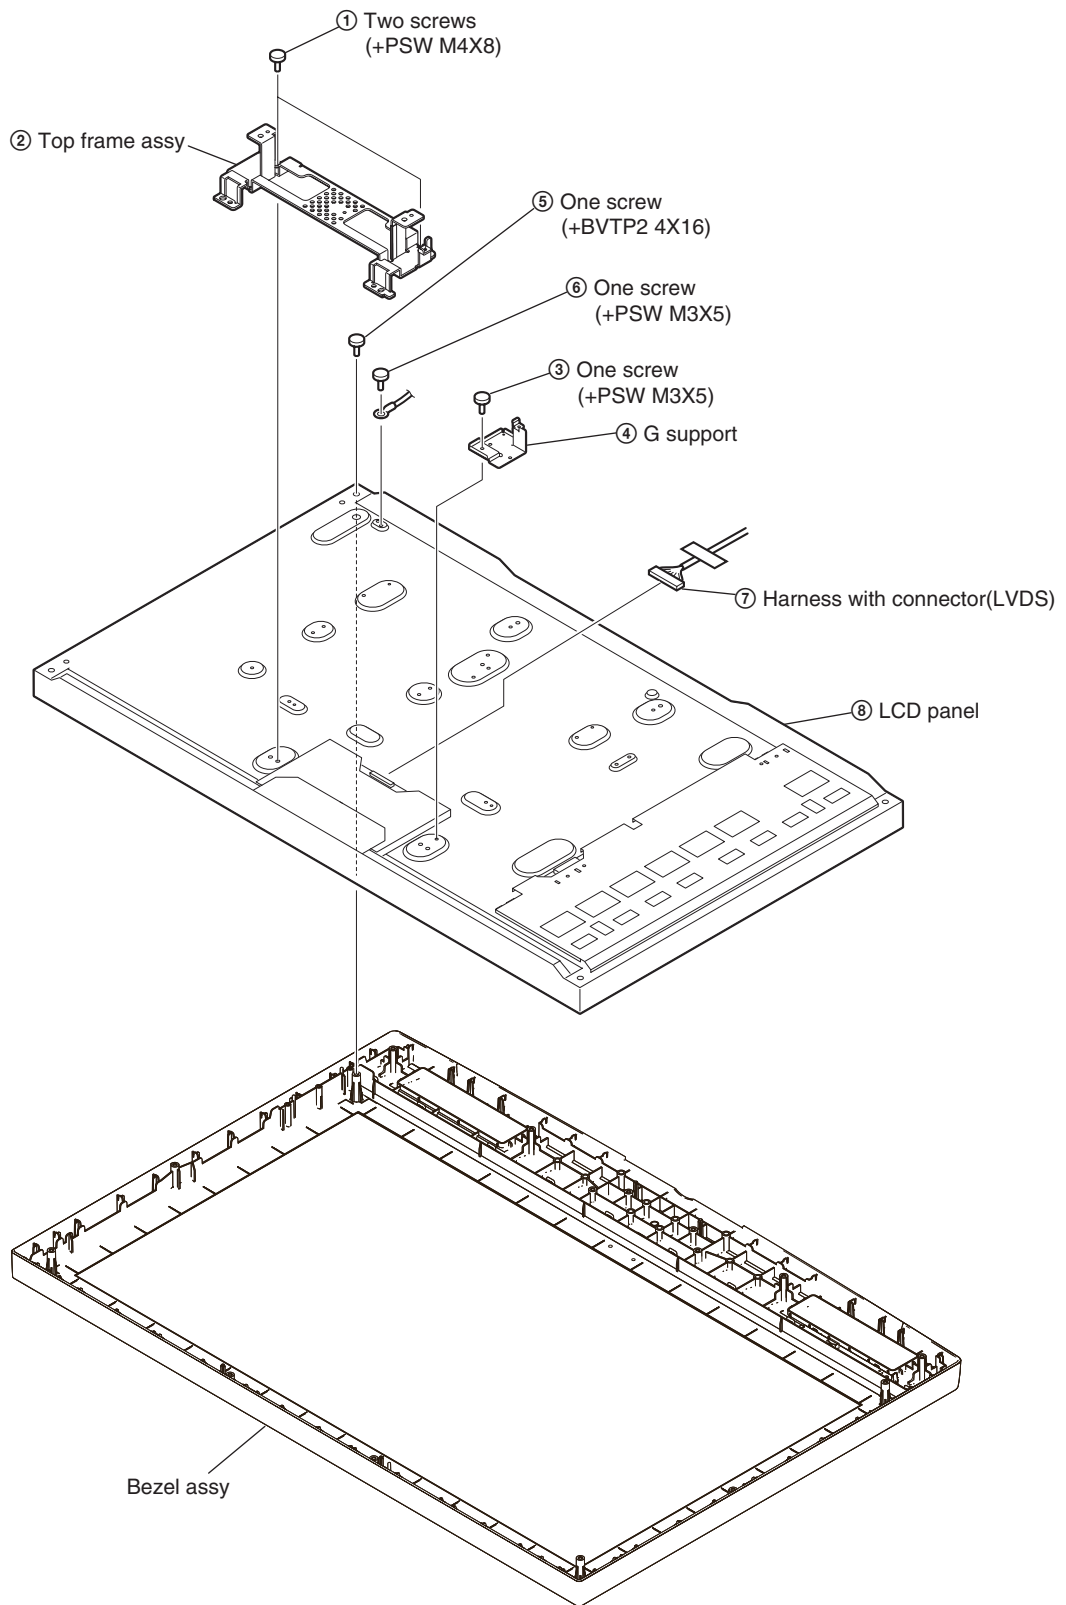


1-2. KDL-40/46V2000

1-2-1. REAR COVER ASSY REMOVAL

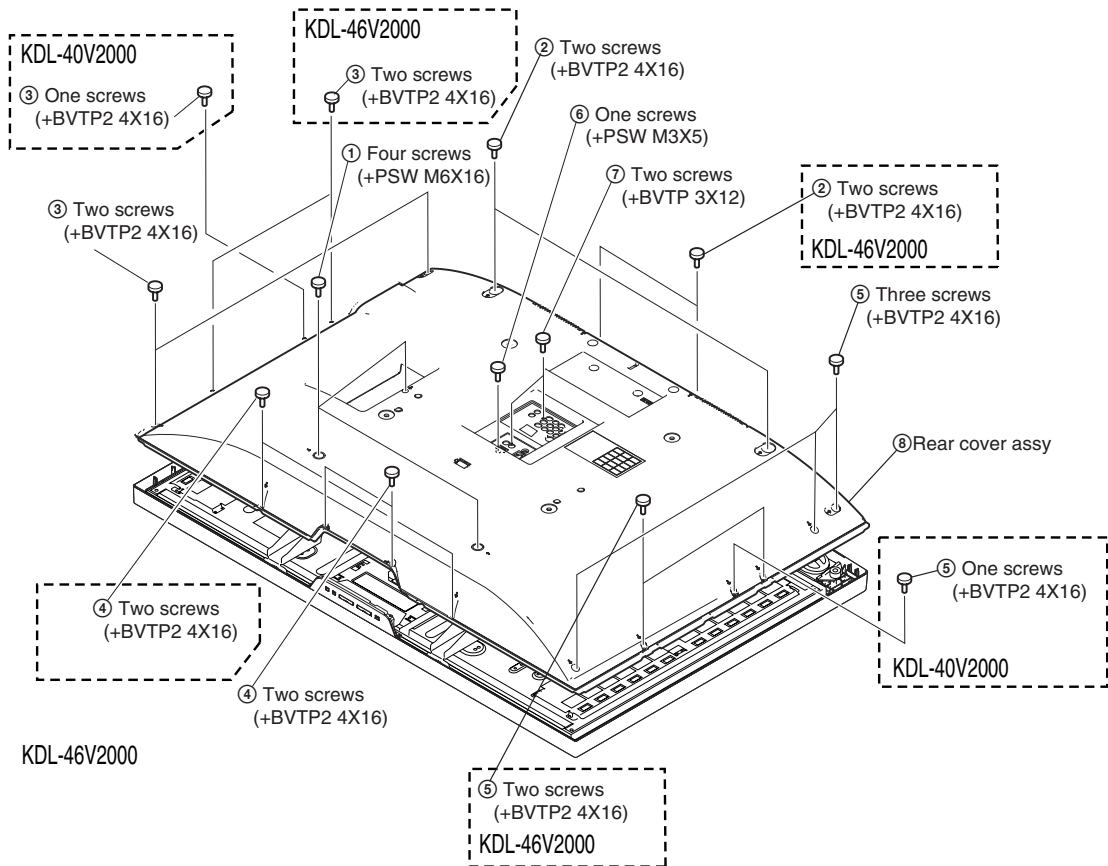


1-2-2. STAND ASSY AND VESA BRACKET REMOVAL

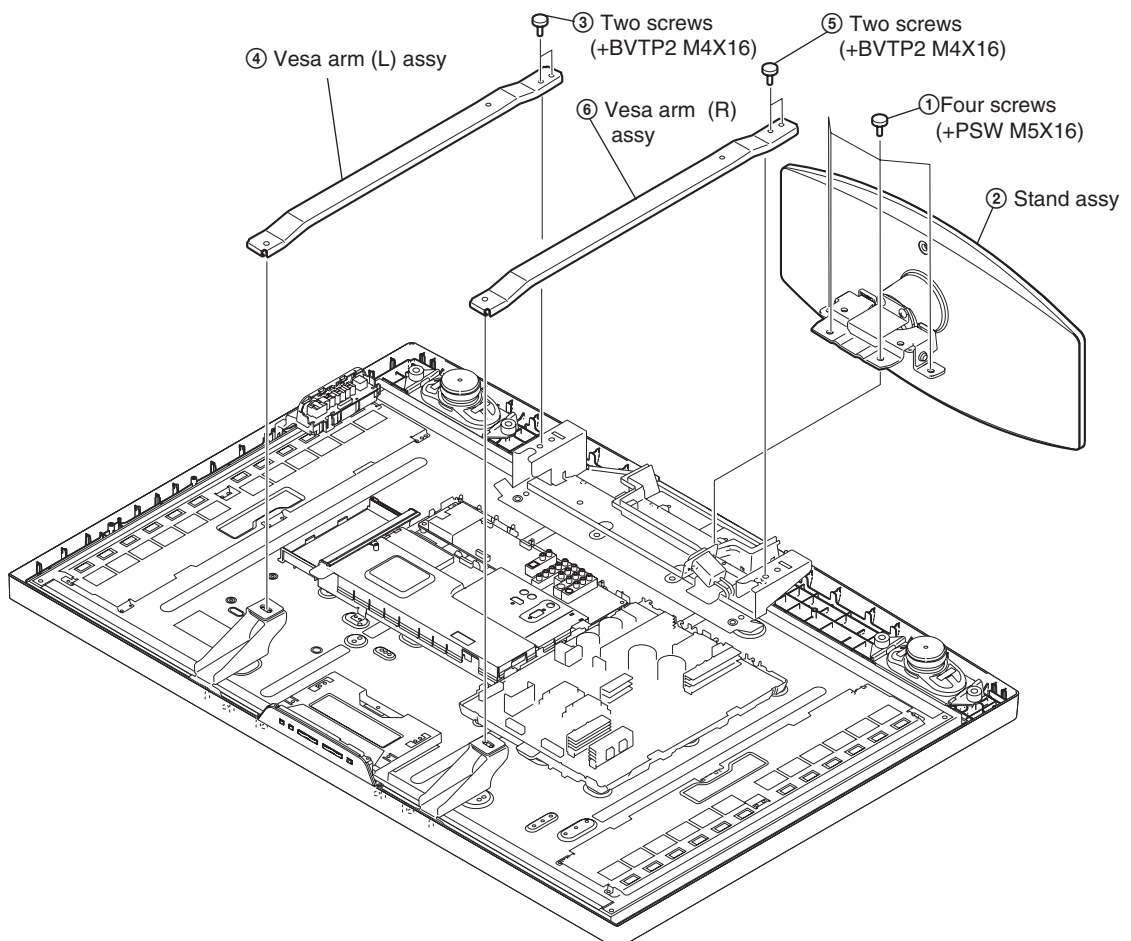


KDL-40/46V2000

1-2-3. H1 BOARD REMOVAL

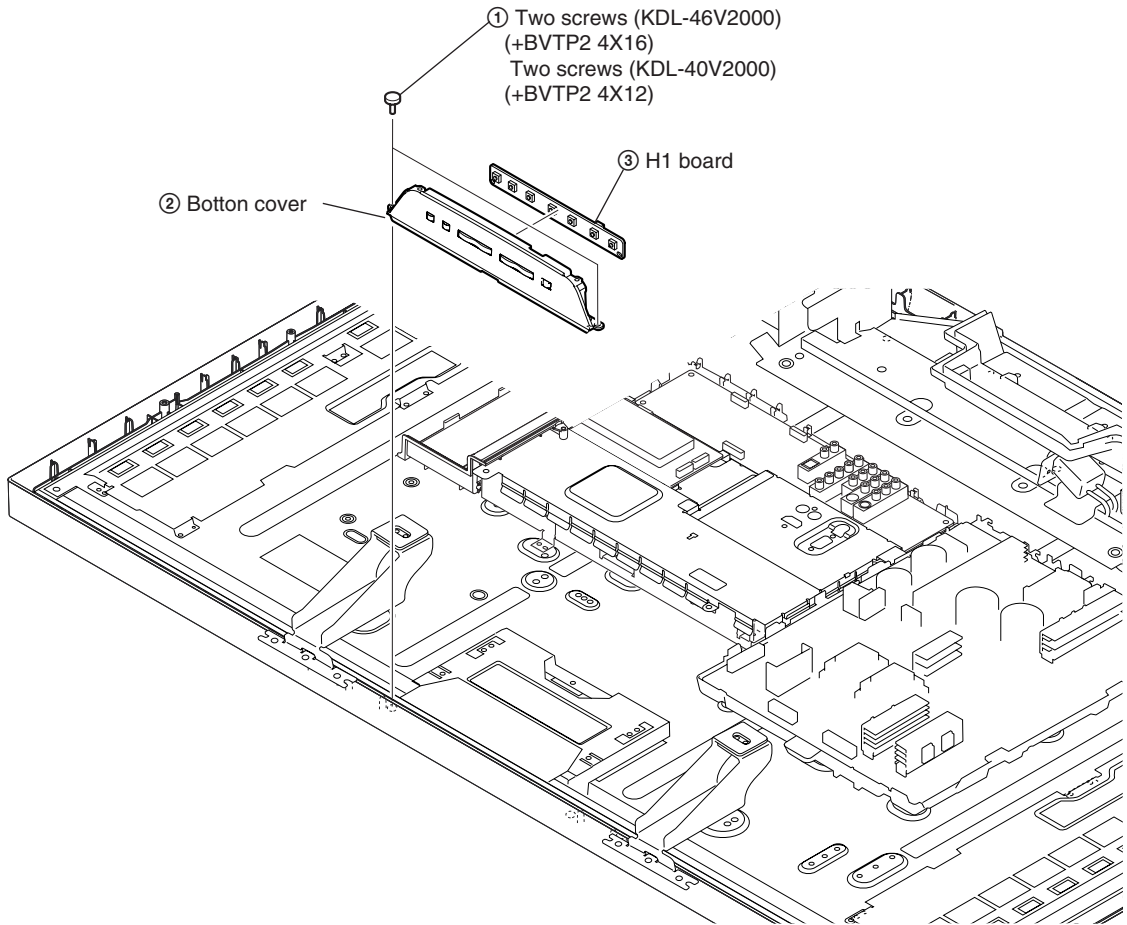


1-2-4. H2 BOARD REMOVAL

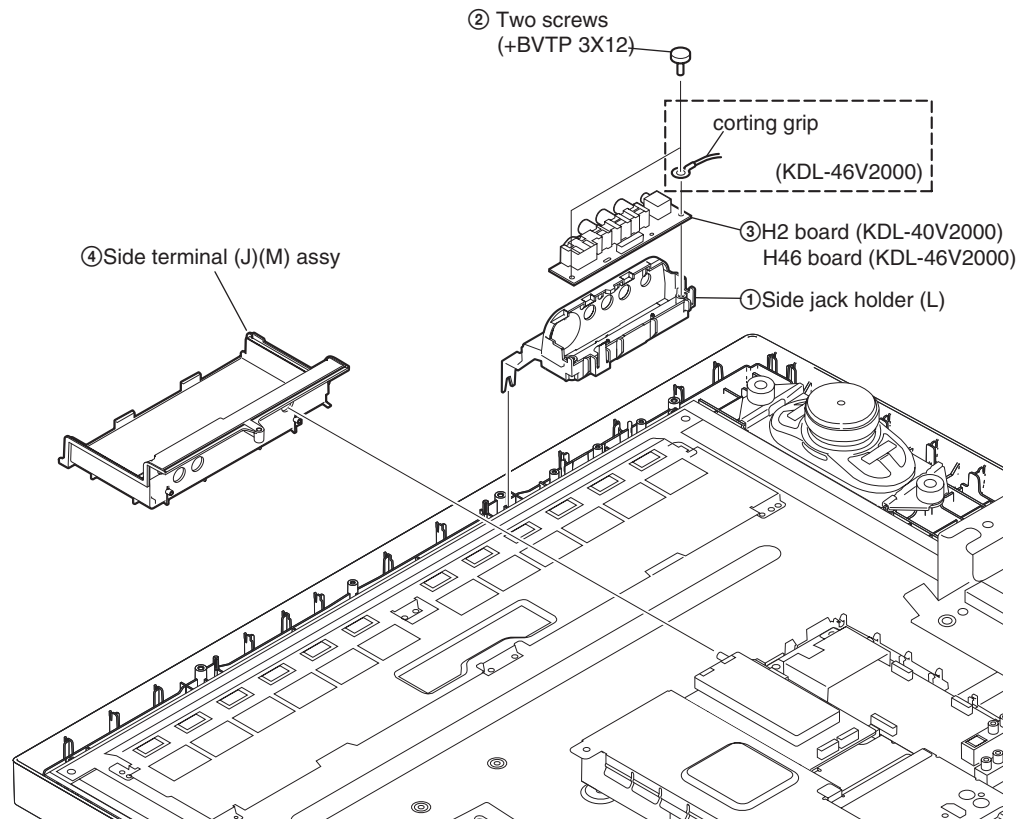

KDL-40/46V2000

1-2-5. G2 BOARD REMOVAL

② FOUR SCREWS
(+PSW 3SG)

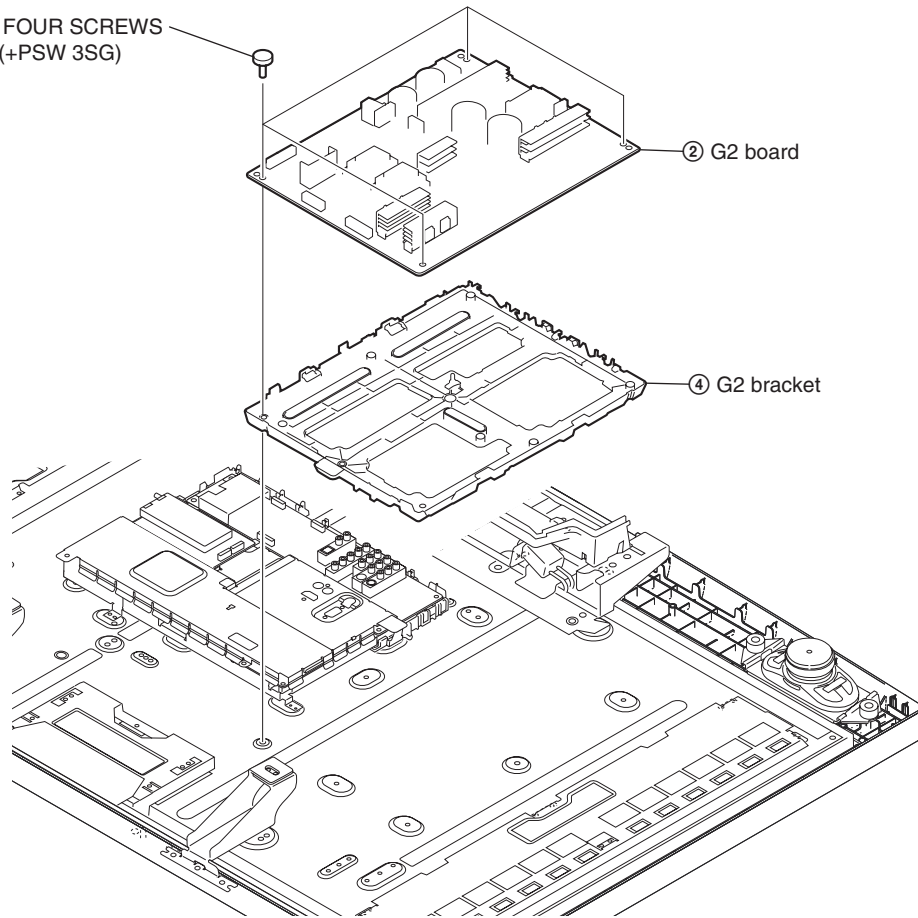

② G2 board


④ G2 bracket

1-2-6. DTT SHIELD REMOVAL


④ One screw
(+PSW M3X5)

⑤ Two screws
(HEX)


⑥ Top shield assy

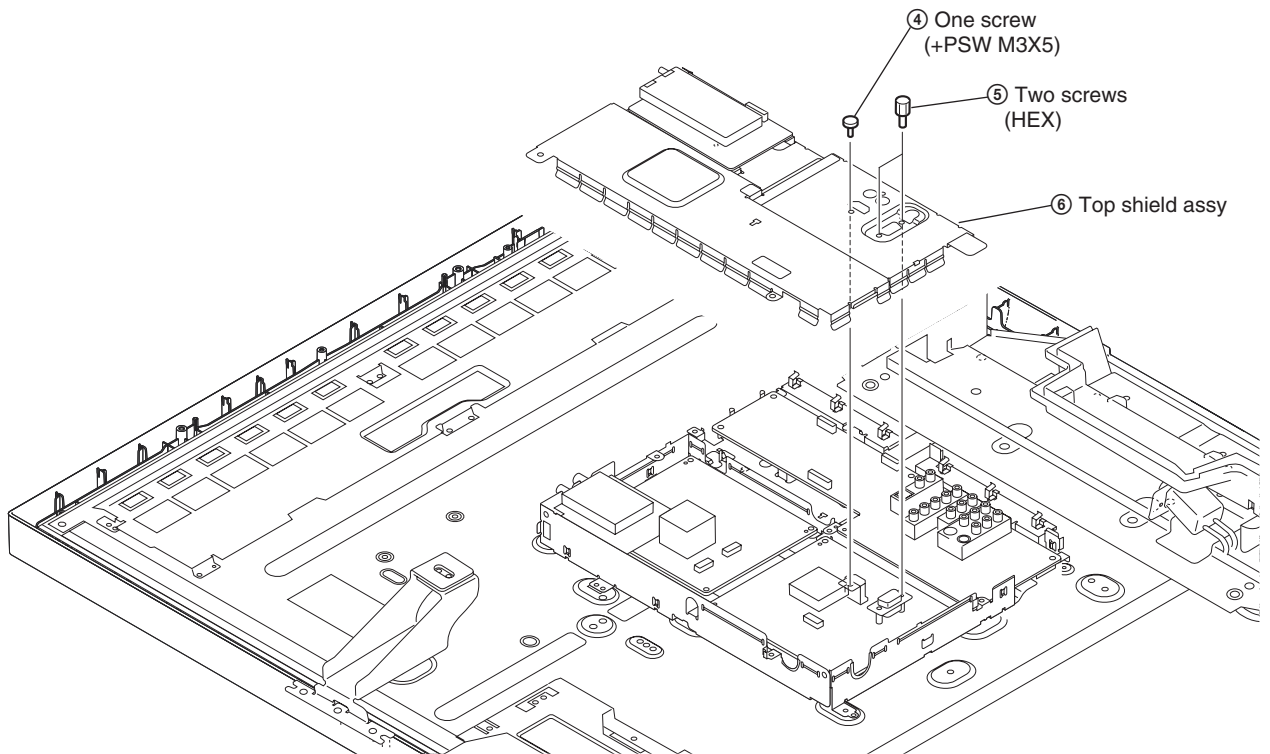


KDL-40/46V2000
1-2-7. TUG BOARD REMOVAL

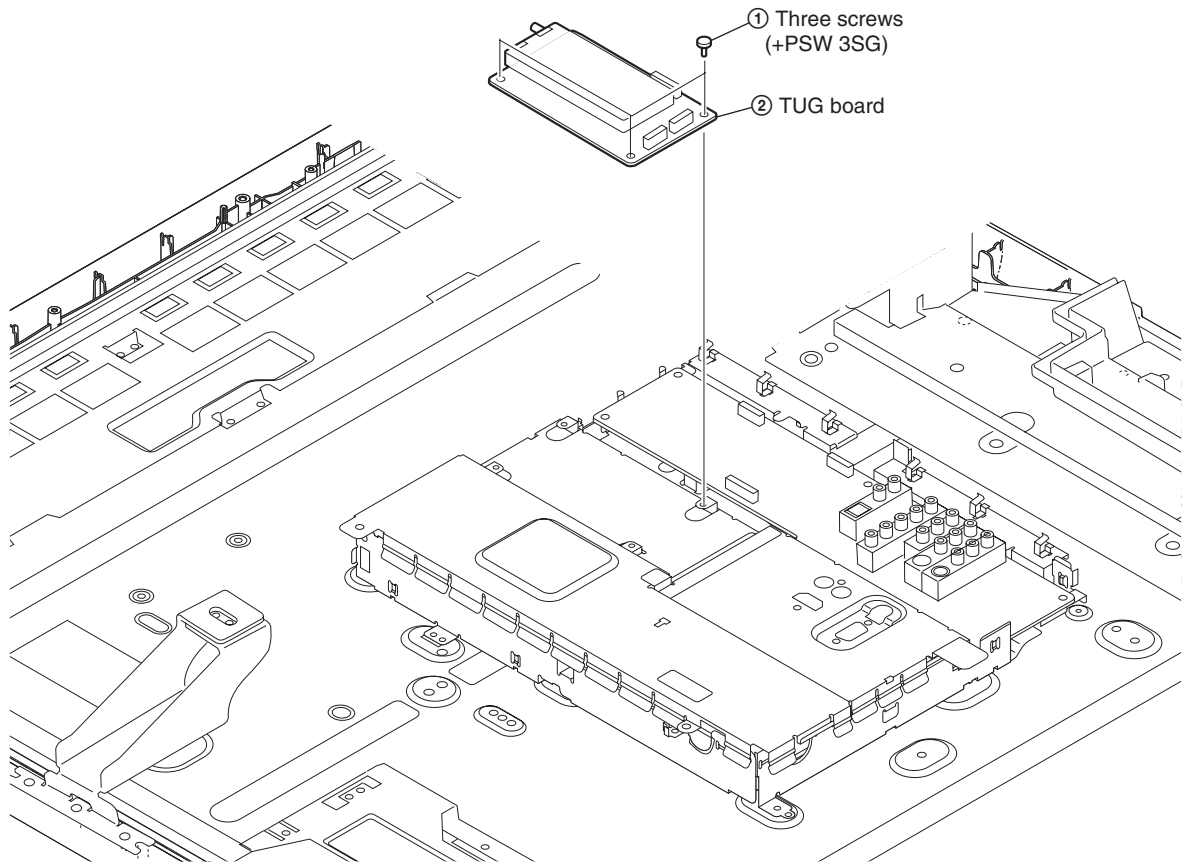

1-2-8. AU BOARD REMOVAL

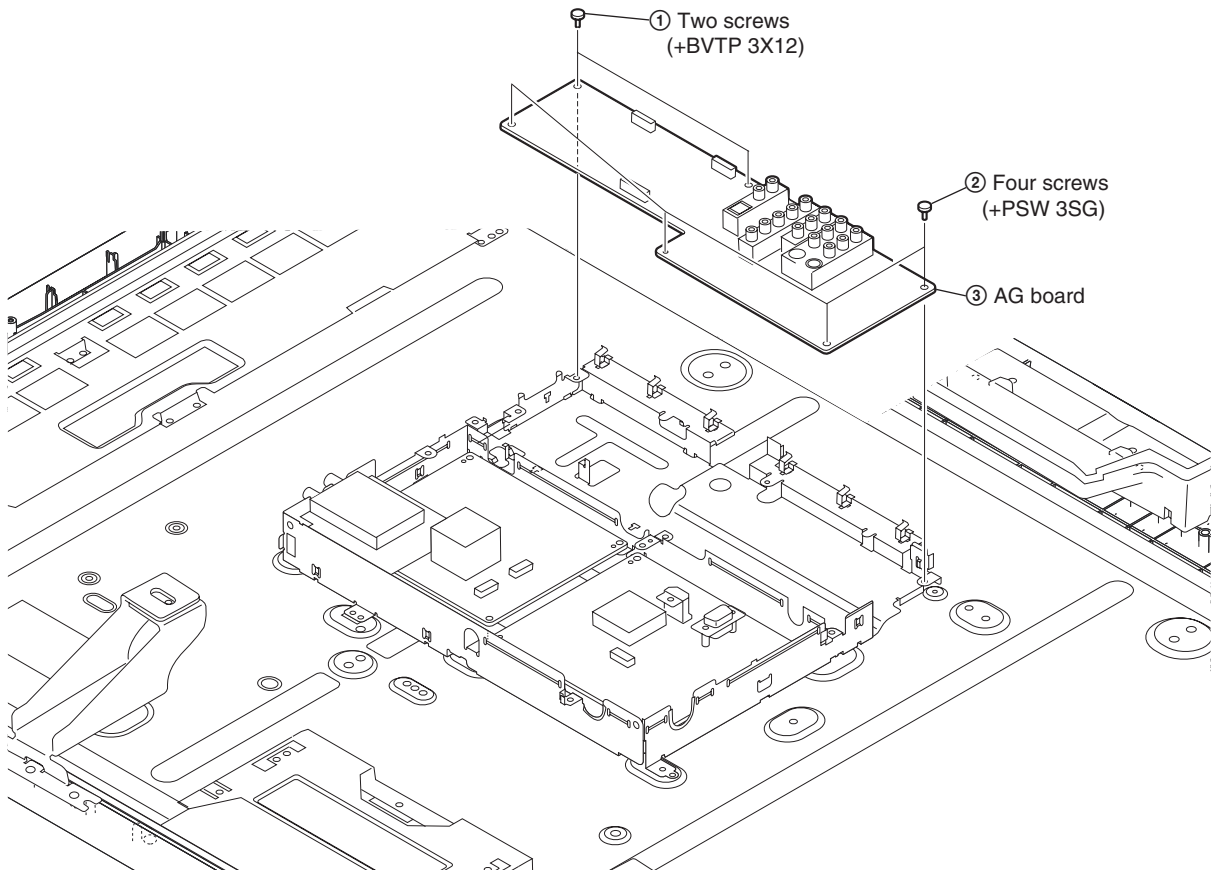


KDL-40/46V2000
1-2-9. B BOARD REMOVAL

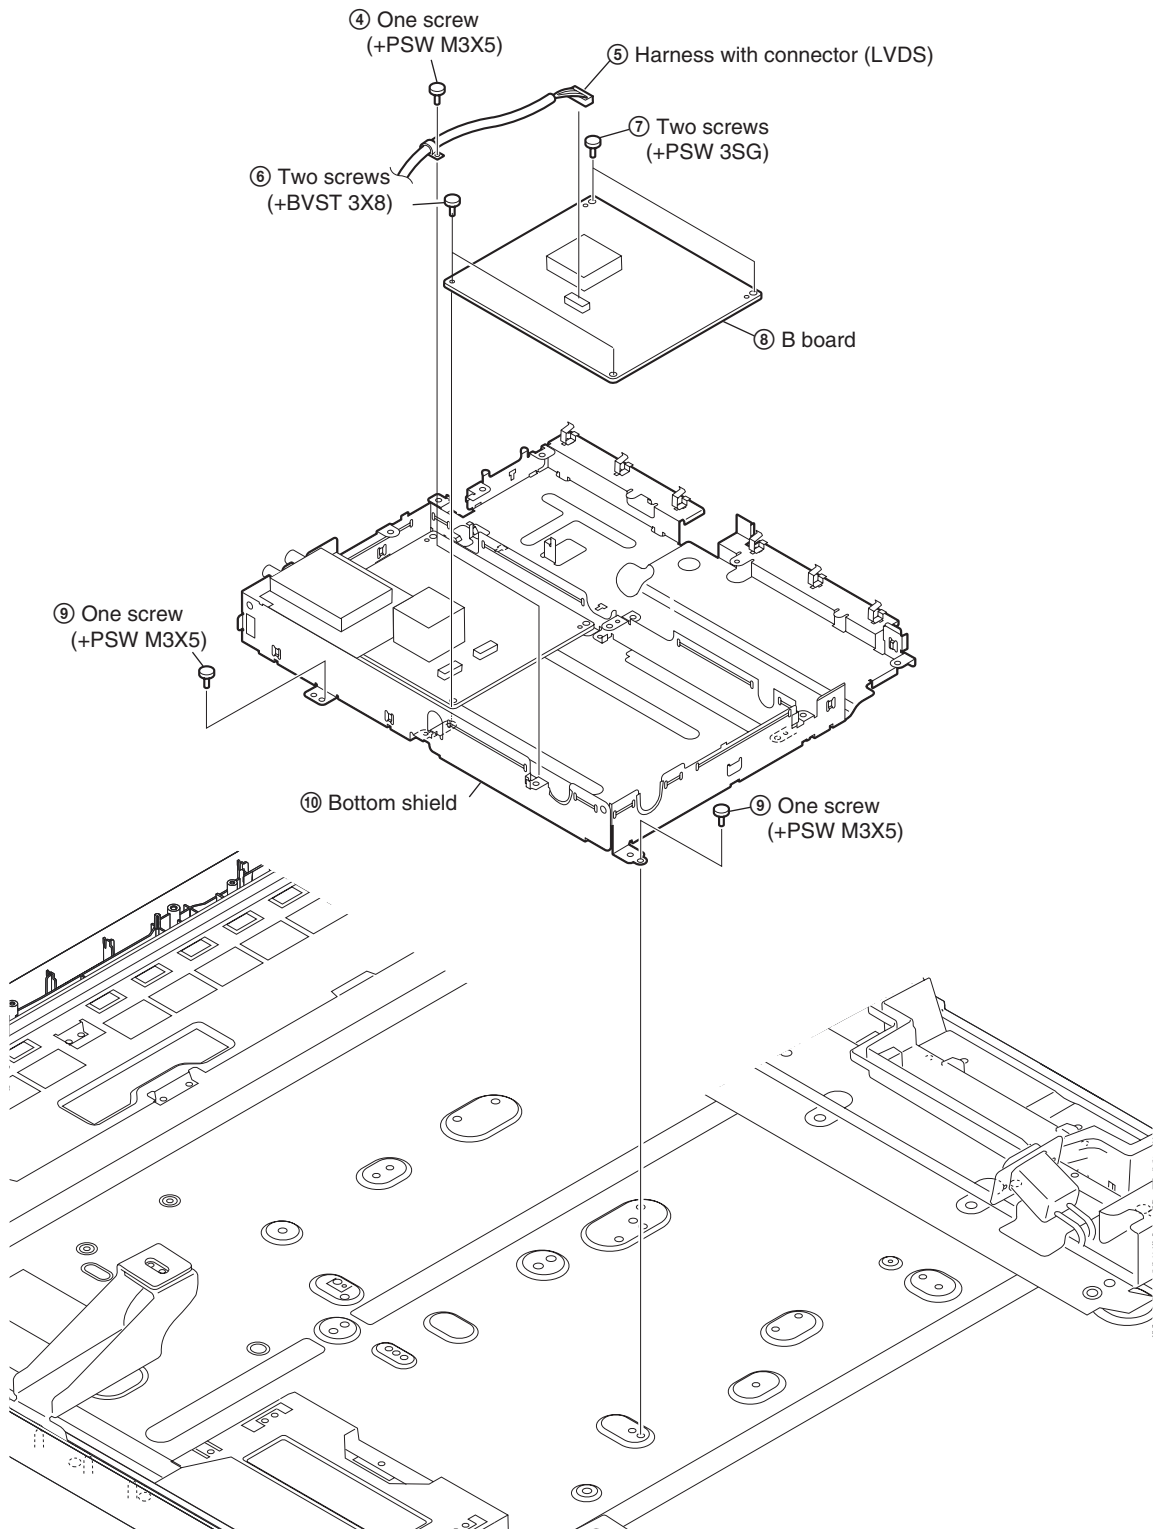


KDL-40/46V2000



1-2-10. AC INLET REMOVAL

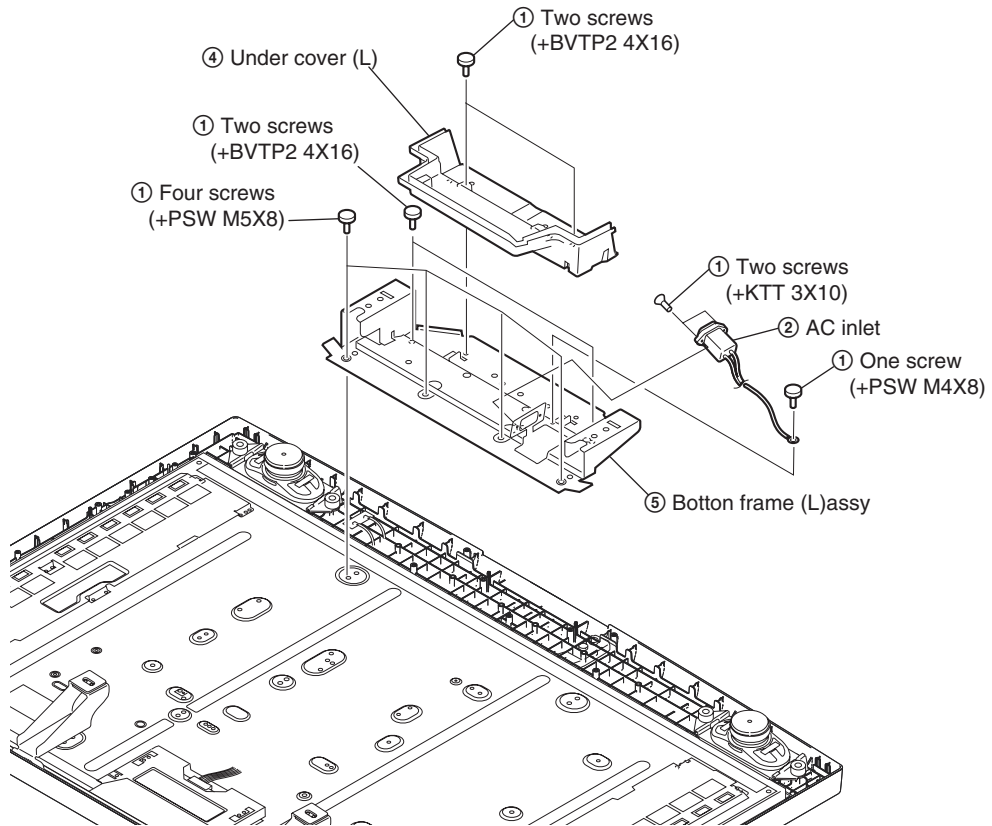


1-2-11. H4 BOARD AND SPEAKER REMOVAL

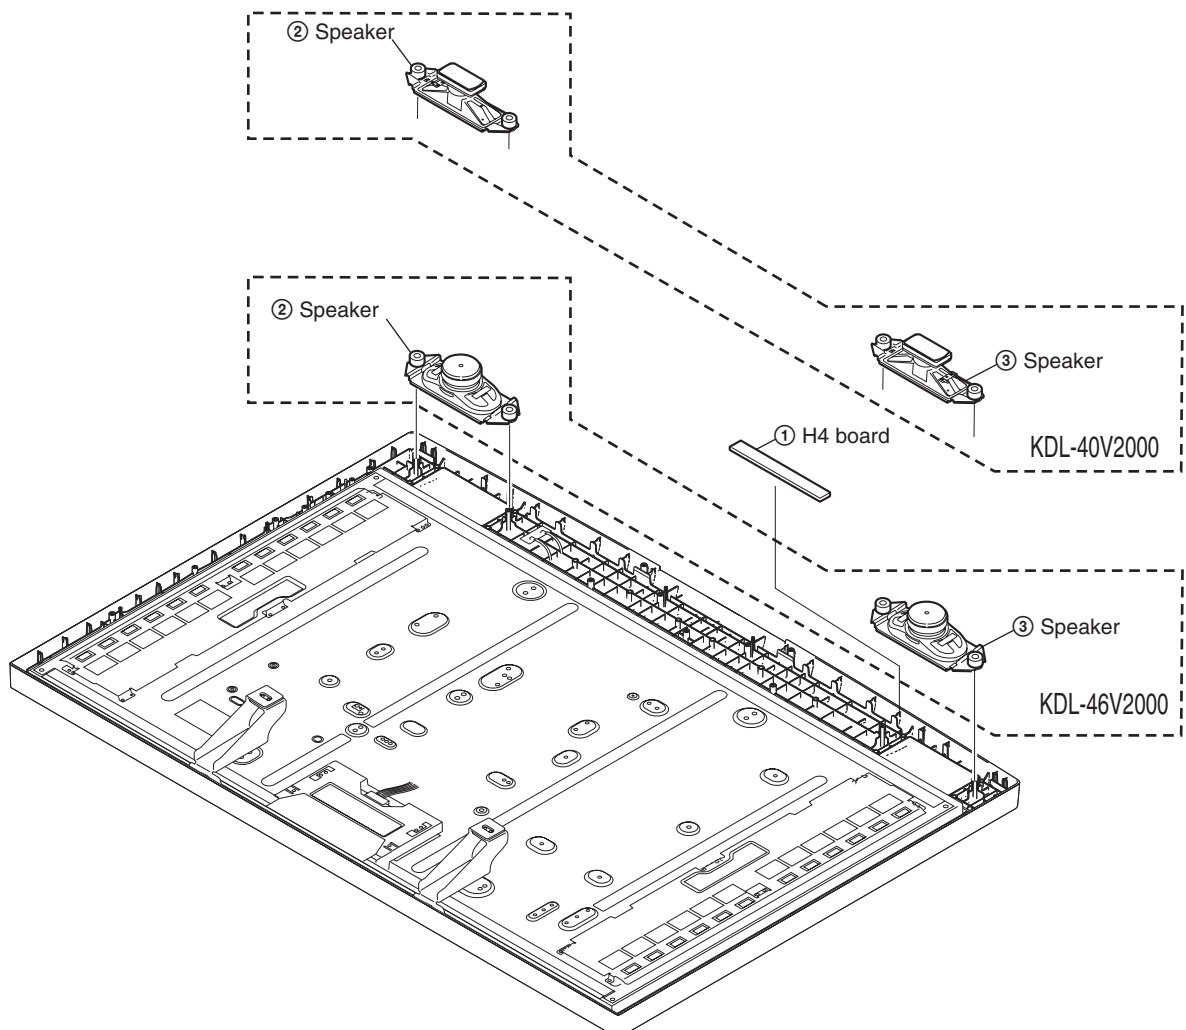

KDL-40/46V2000
1-2-12. TOP FRAME REMOVAL

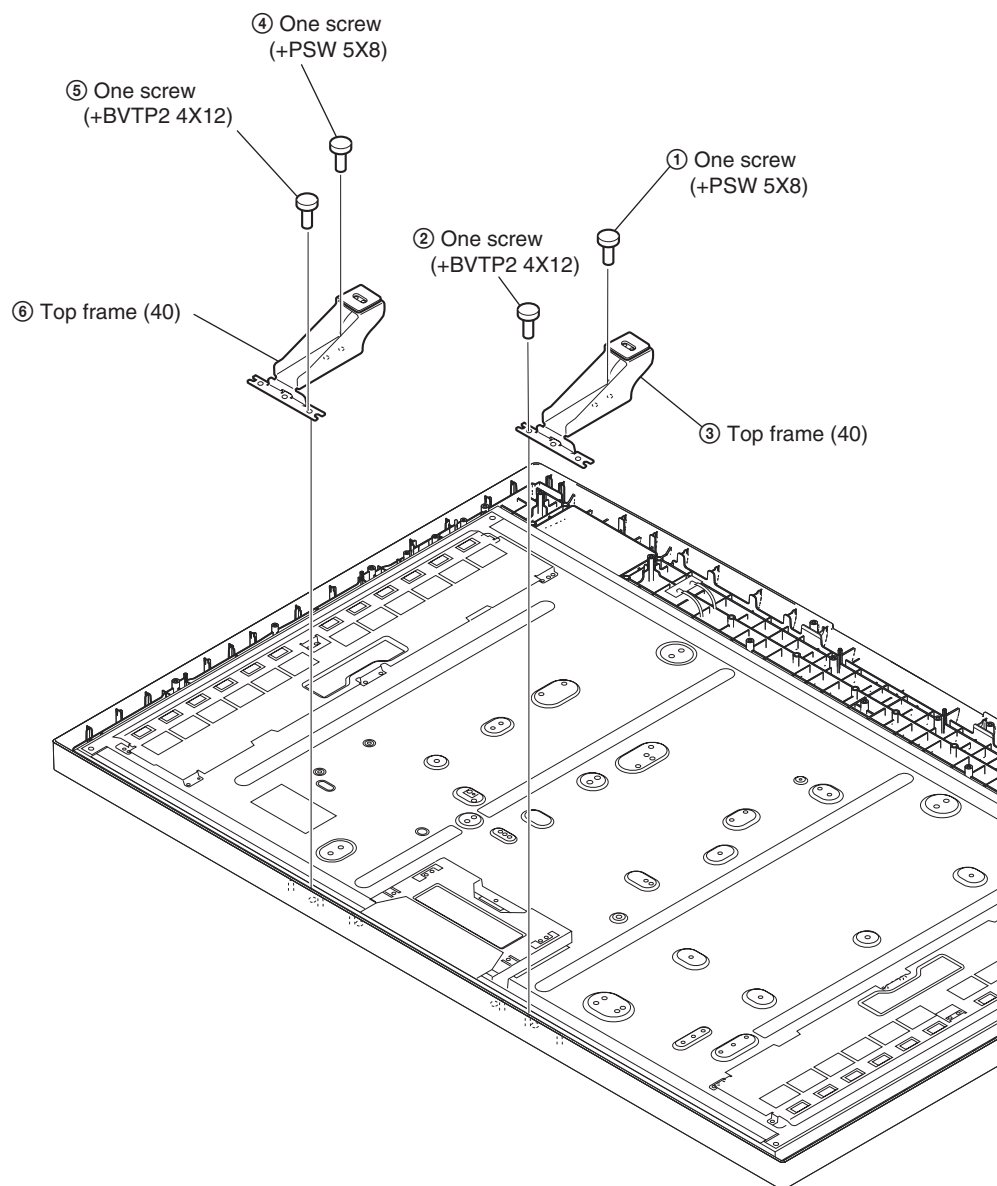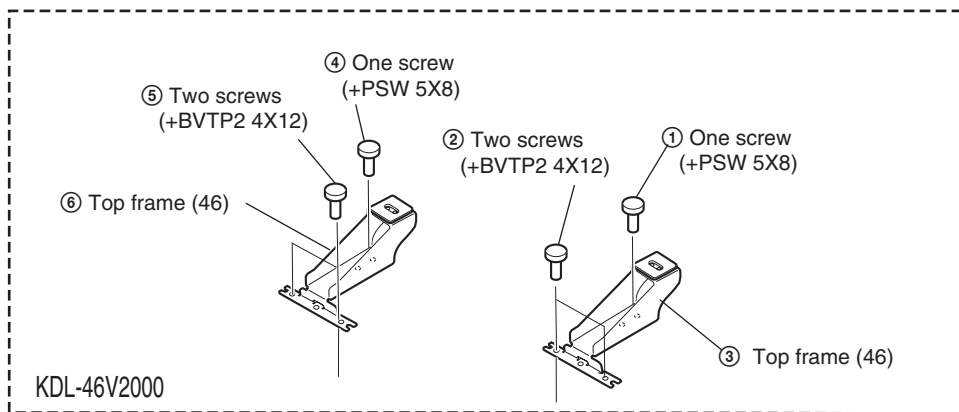


KDL-40/46V2000
1-2-13. LCD PANEL REMOVAL

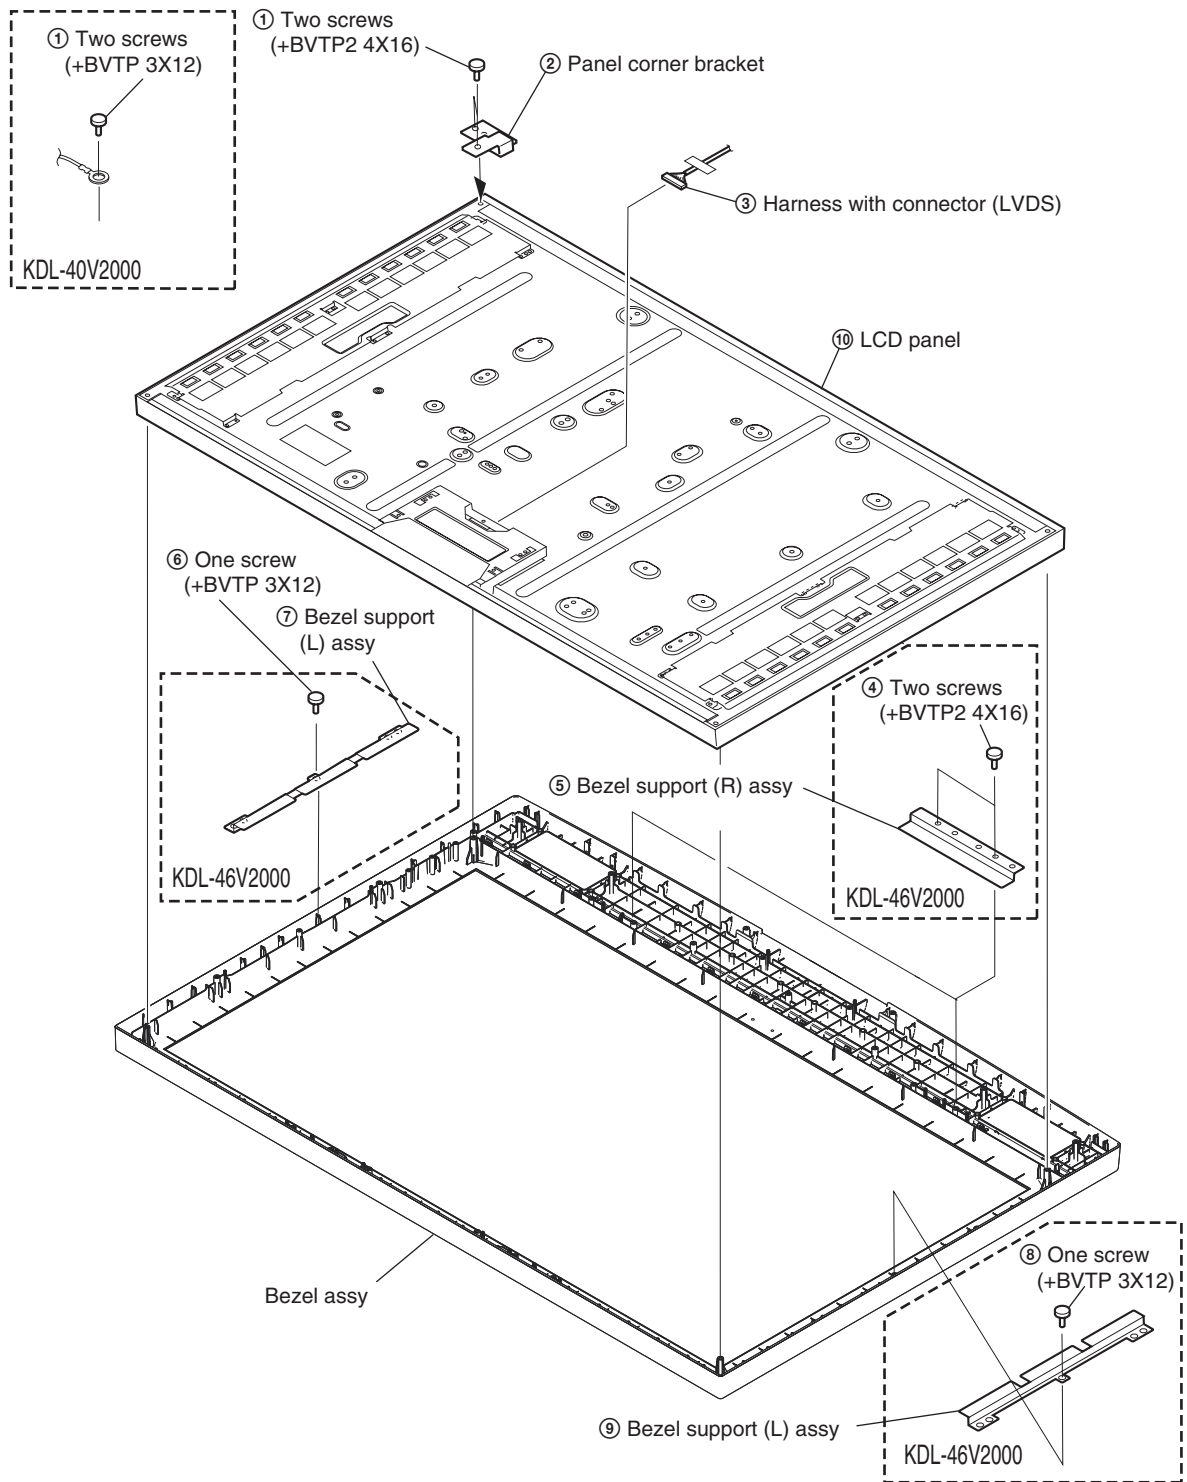


SECTION 2 DIAGRAMS


2-1. BLOCK DIAGRAMS (1) AG, H2 and H46 Boards

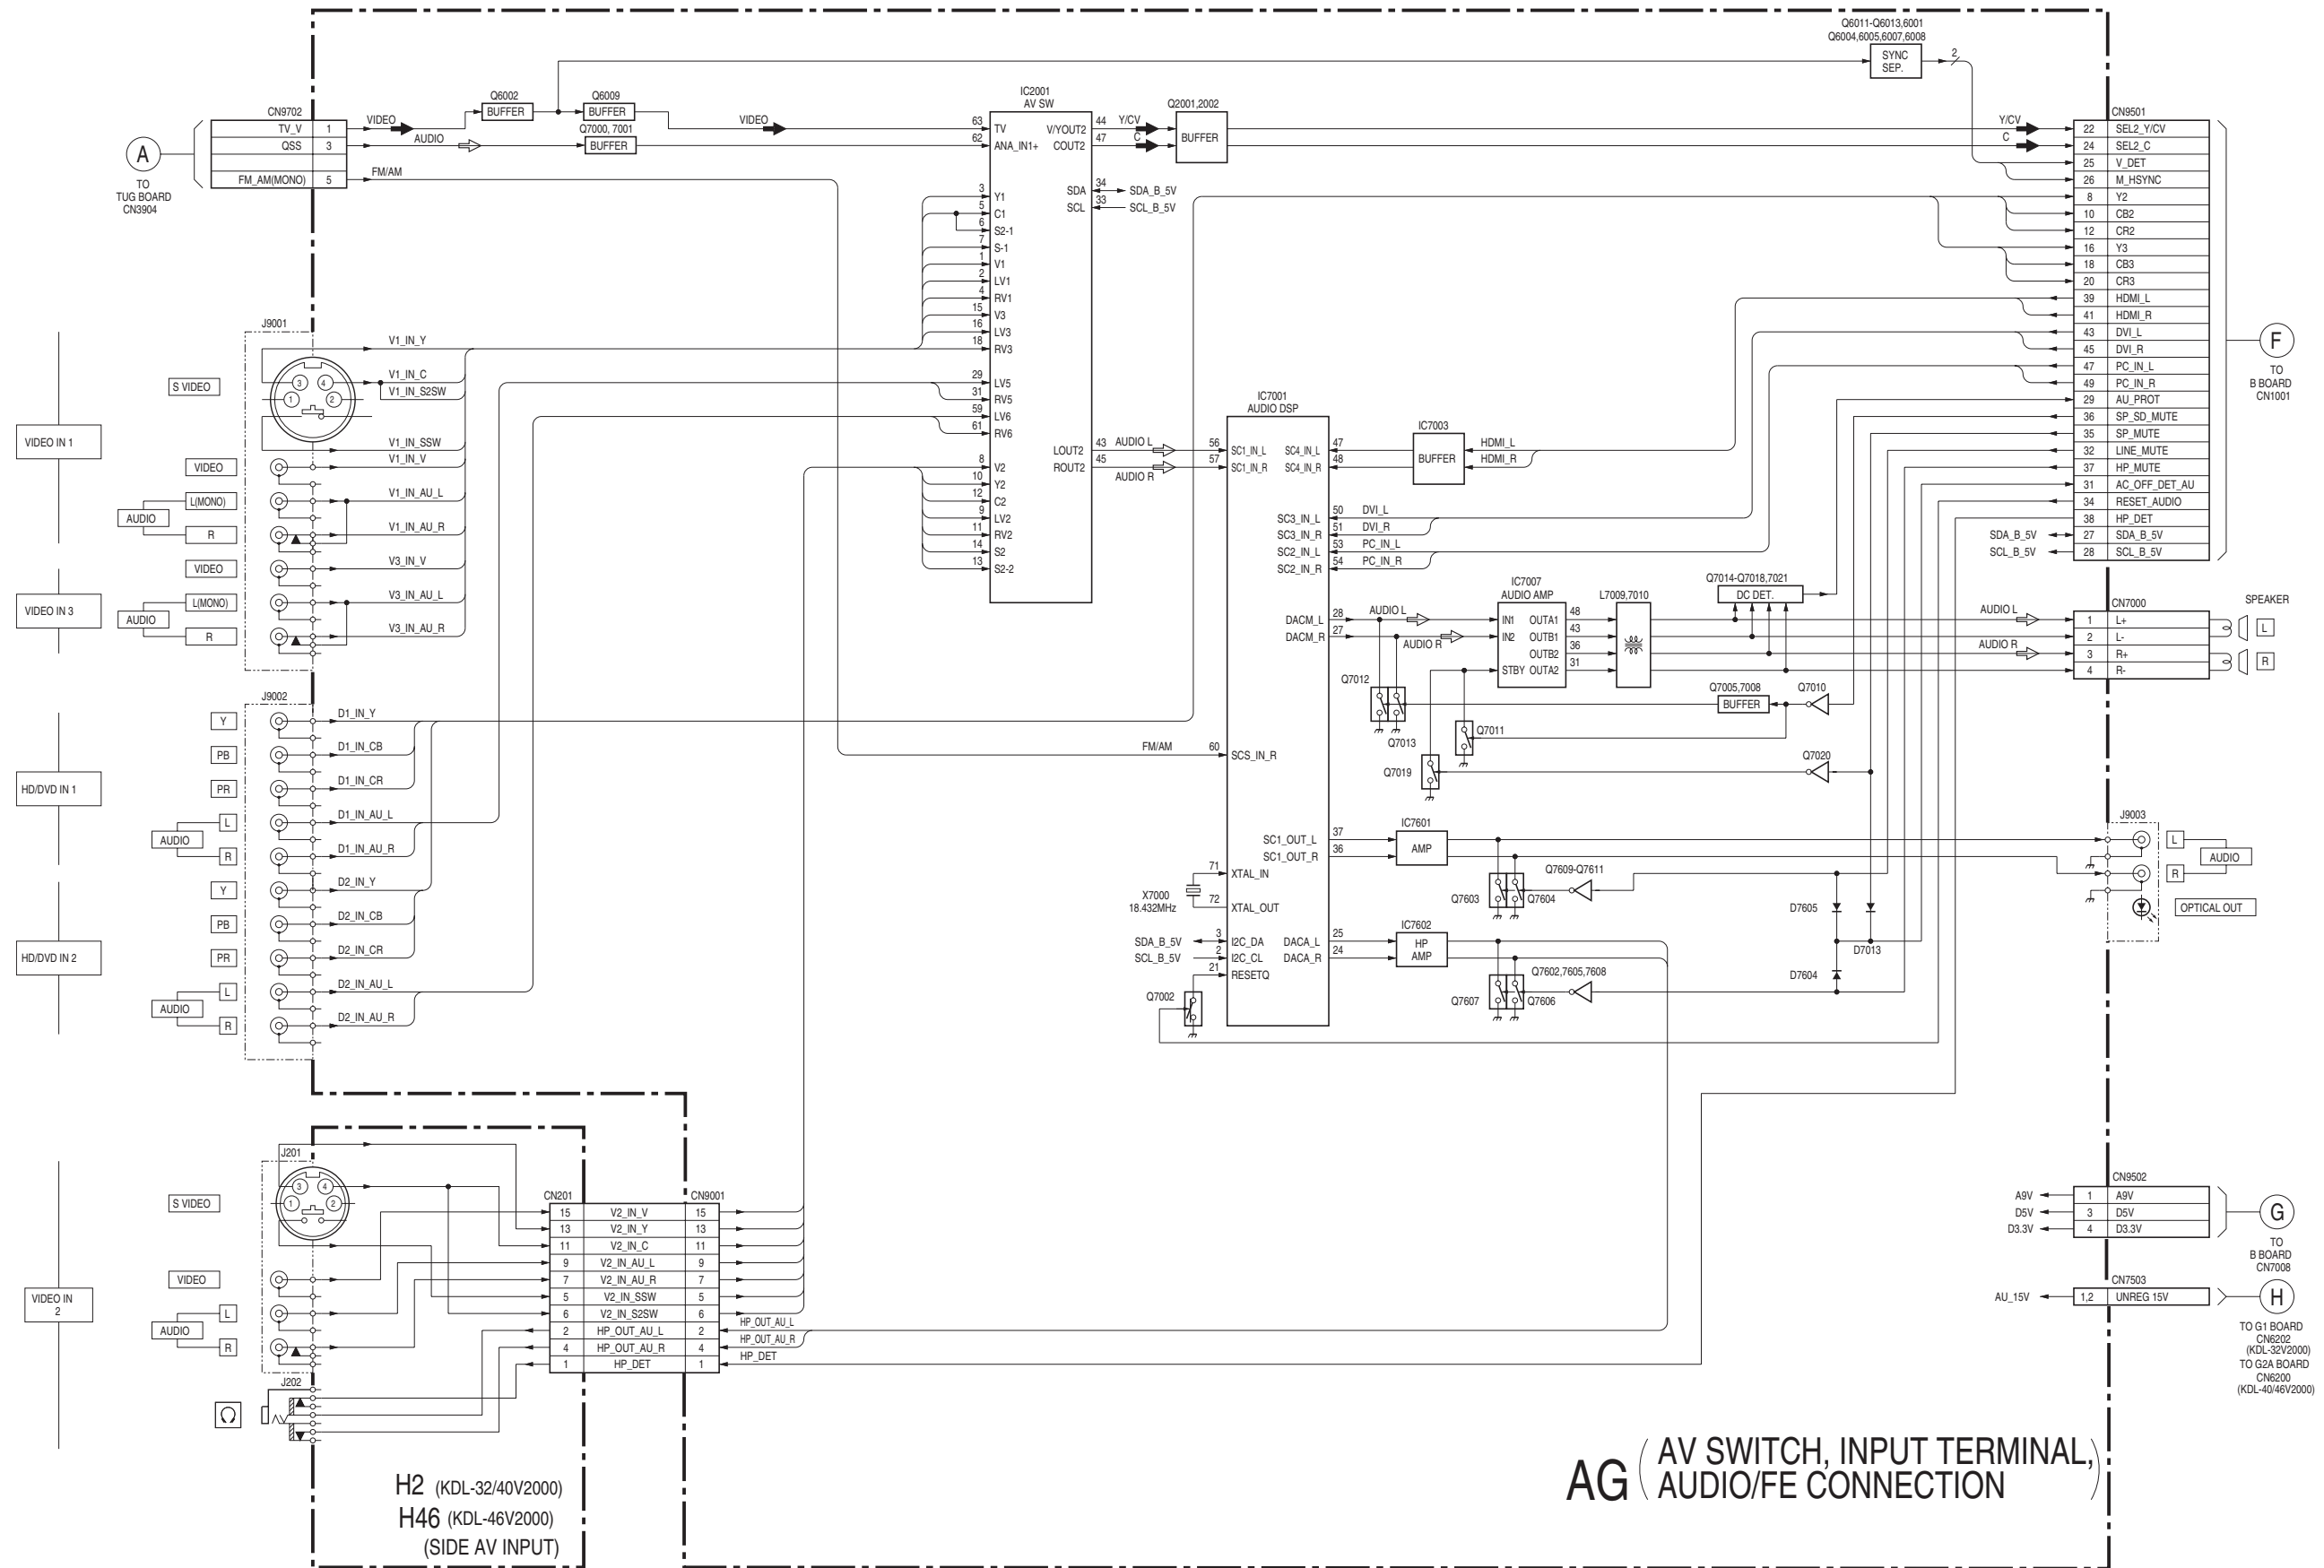


(3) TUG Board

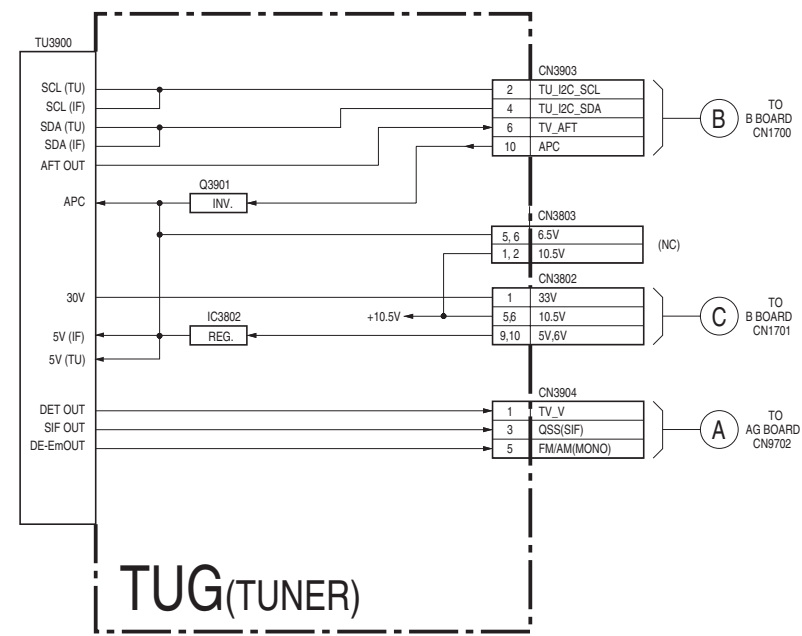


(4) G1 Board

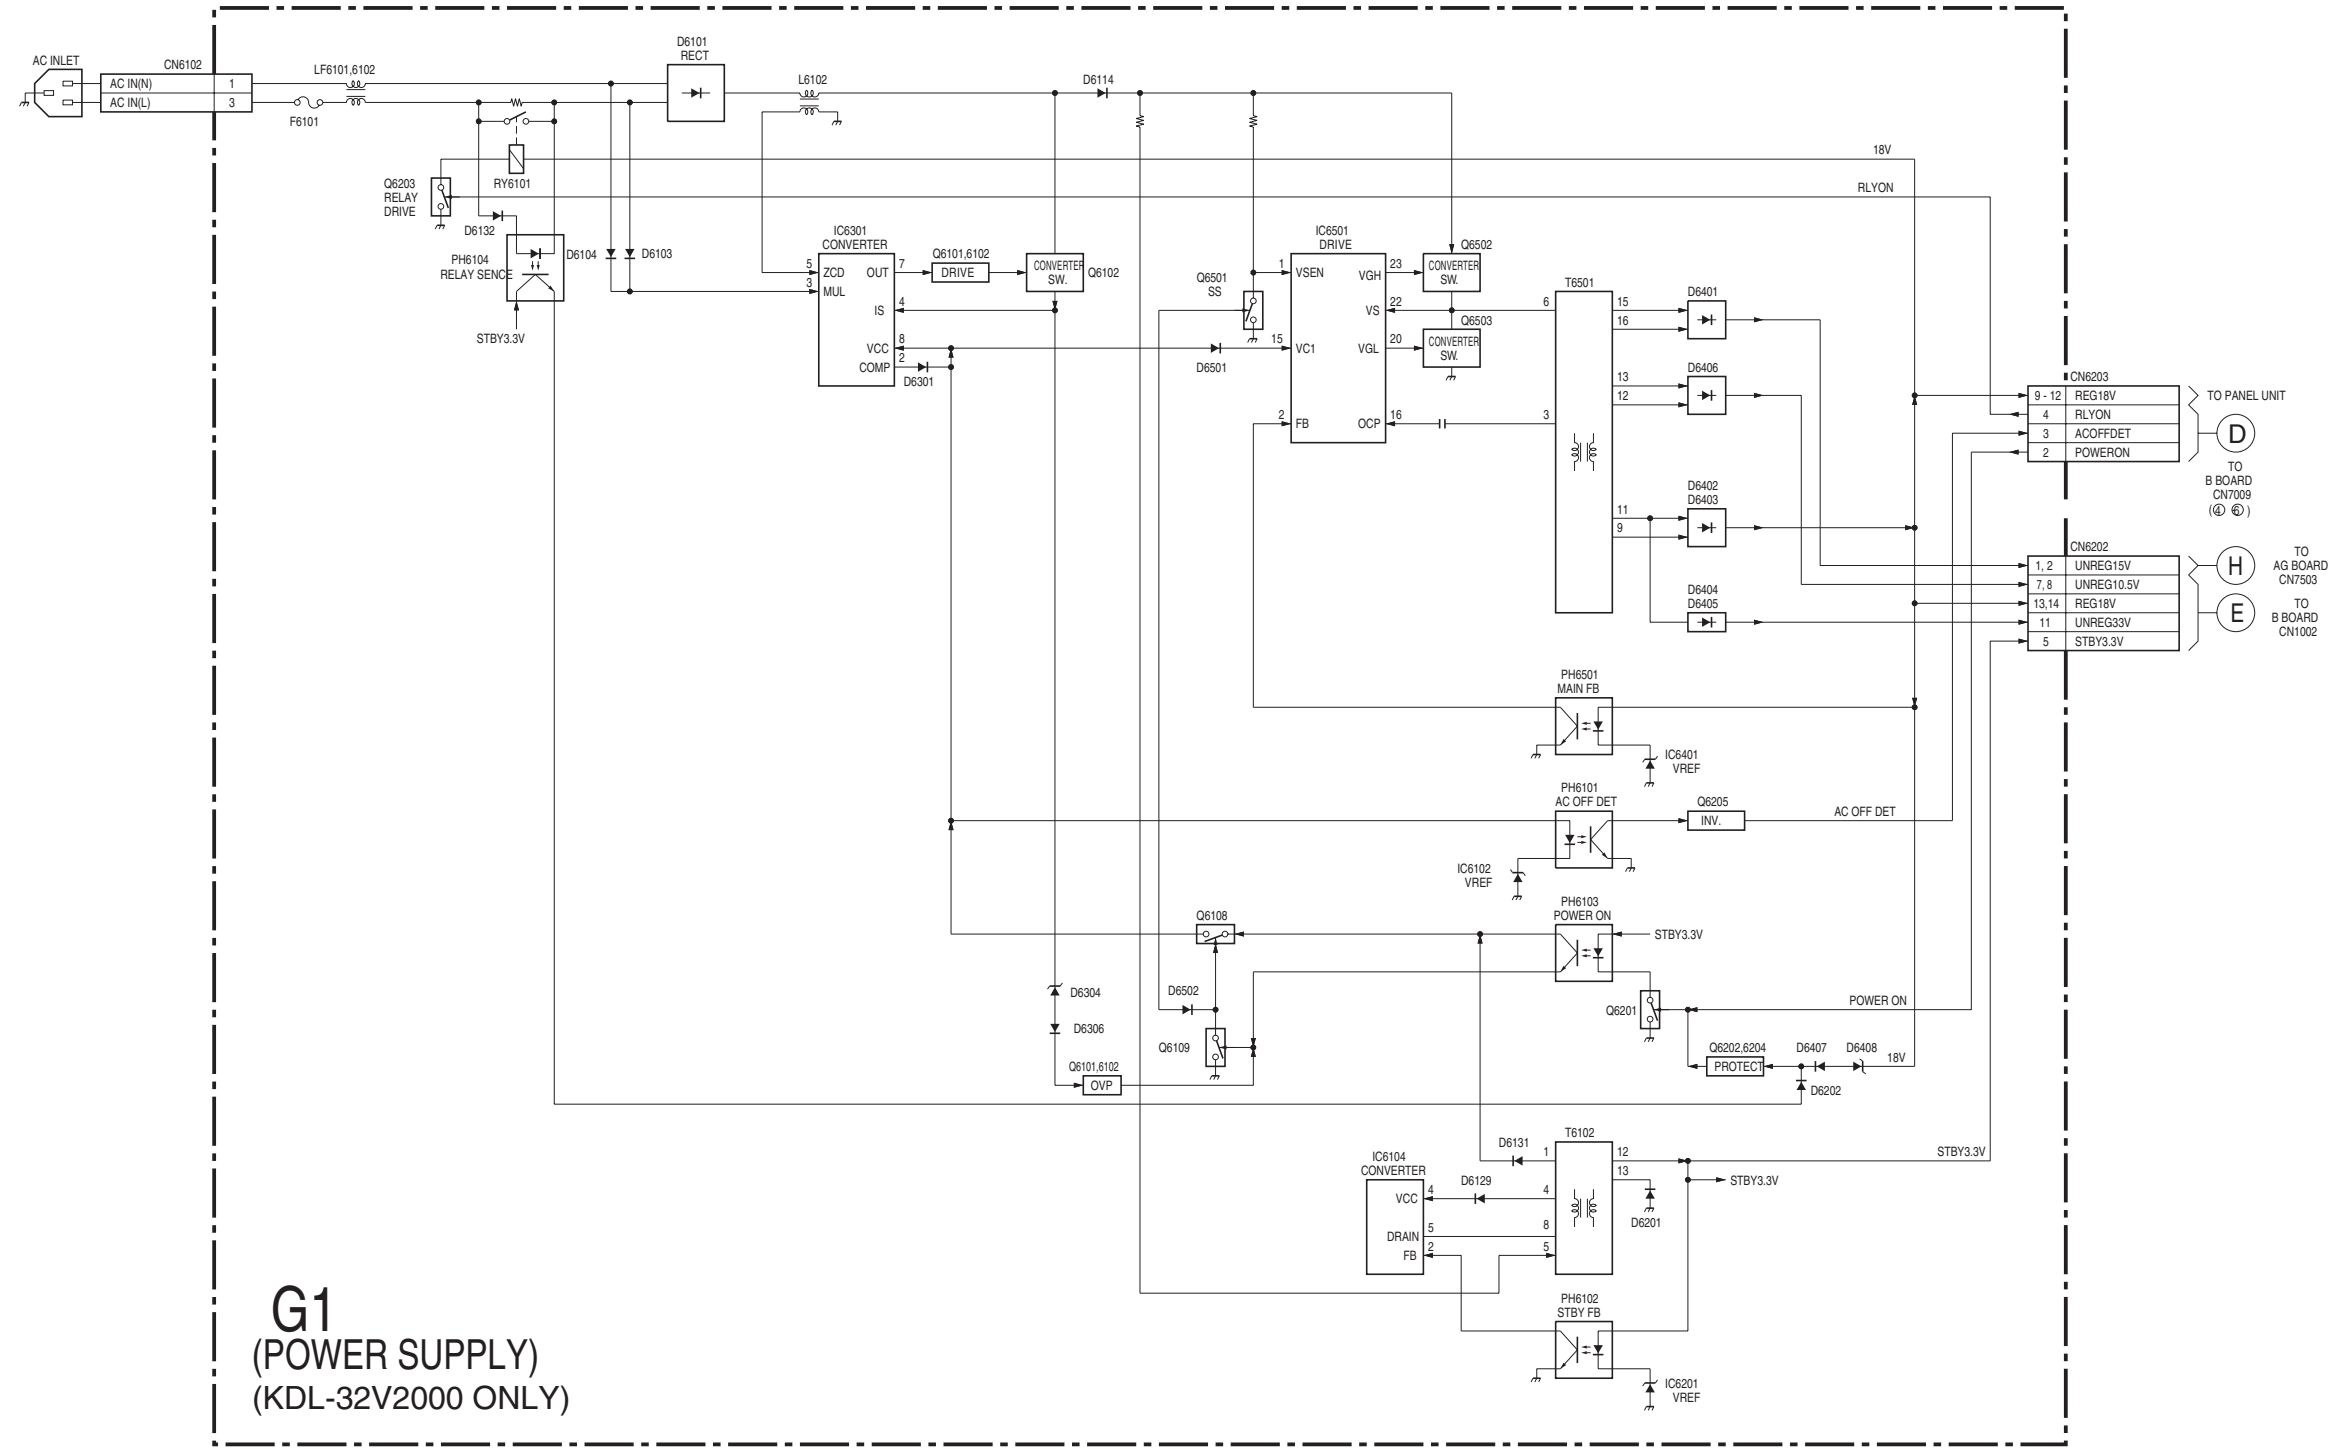

(5) G2A Board

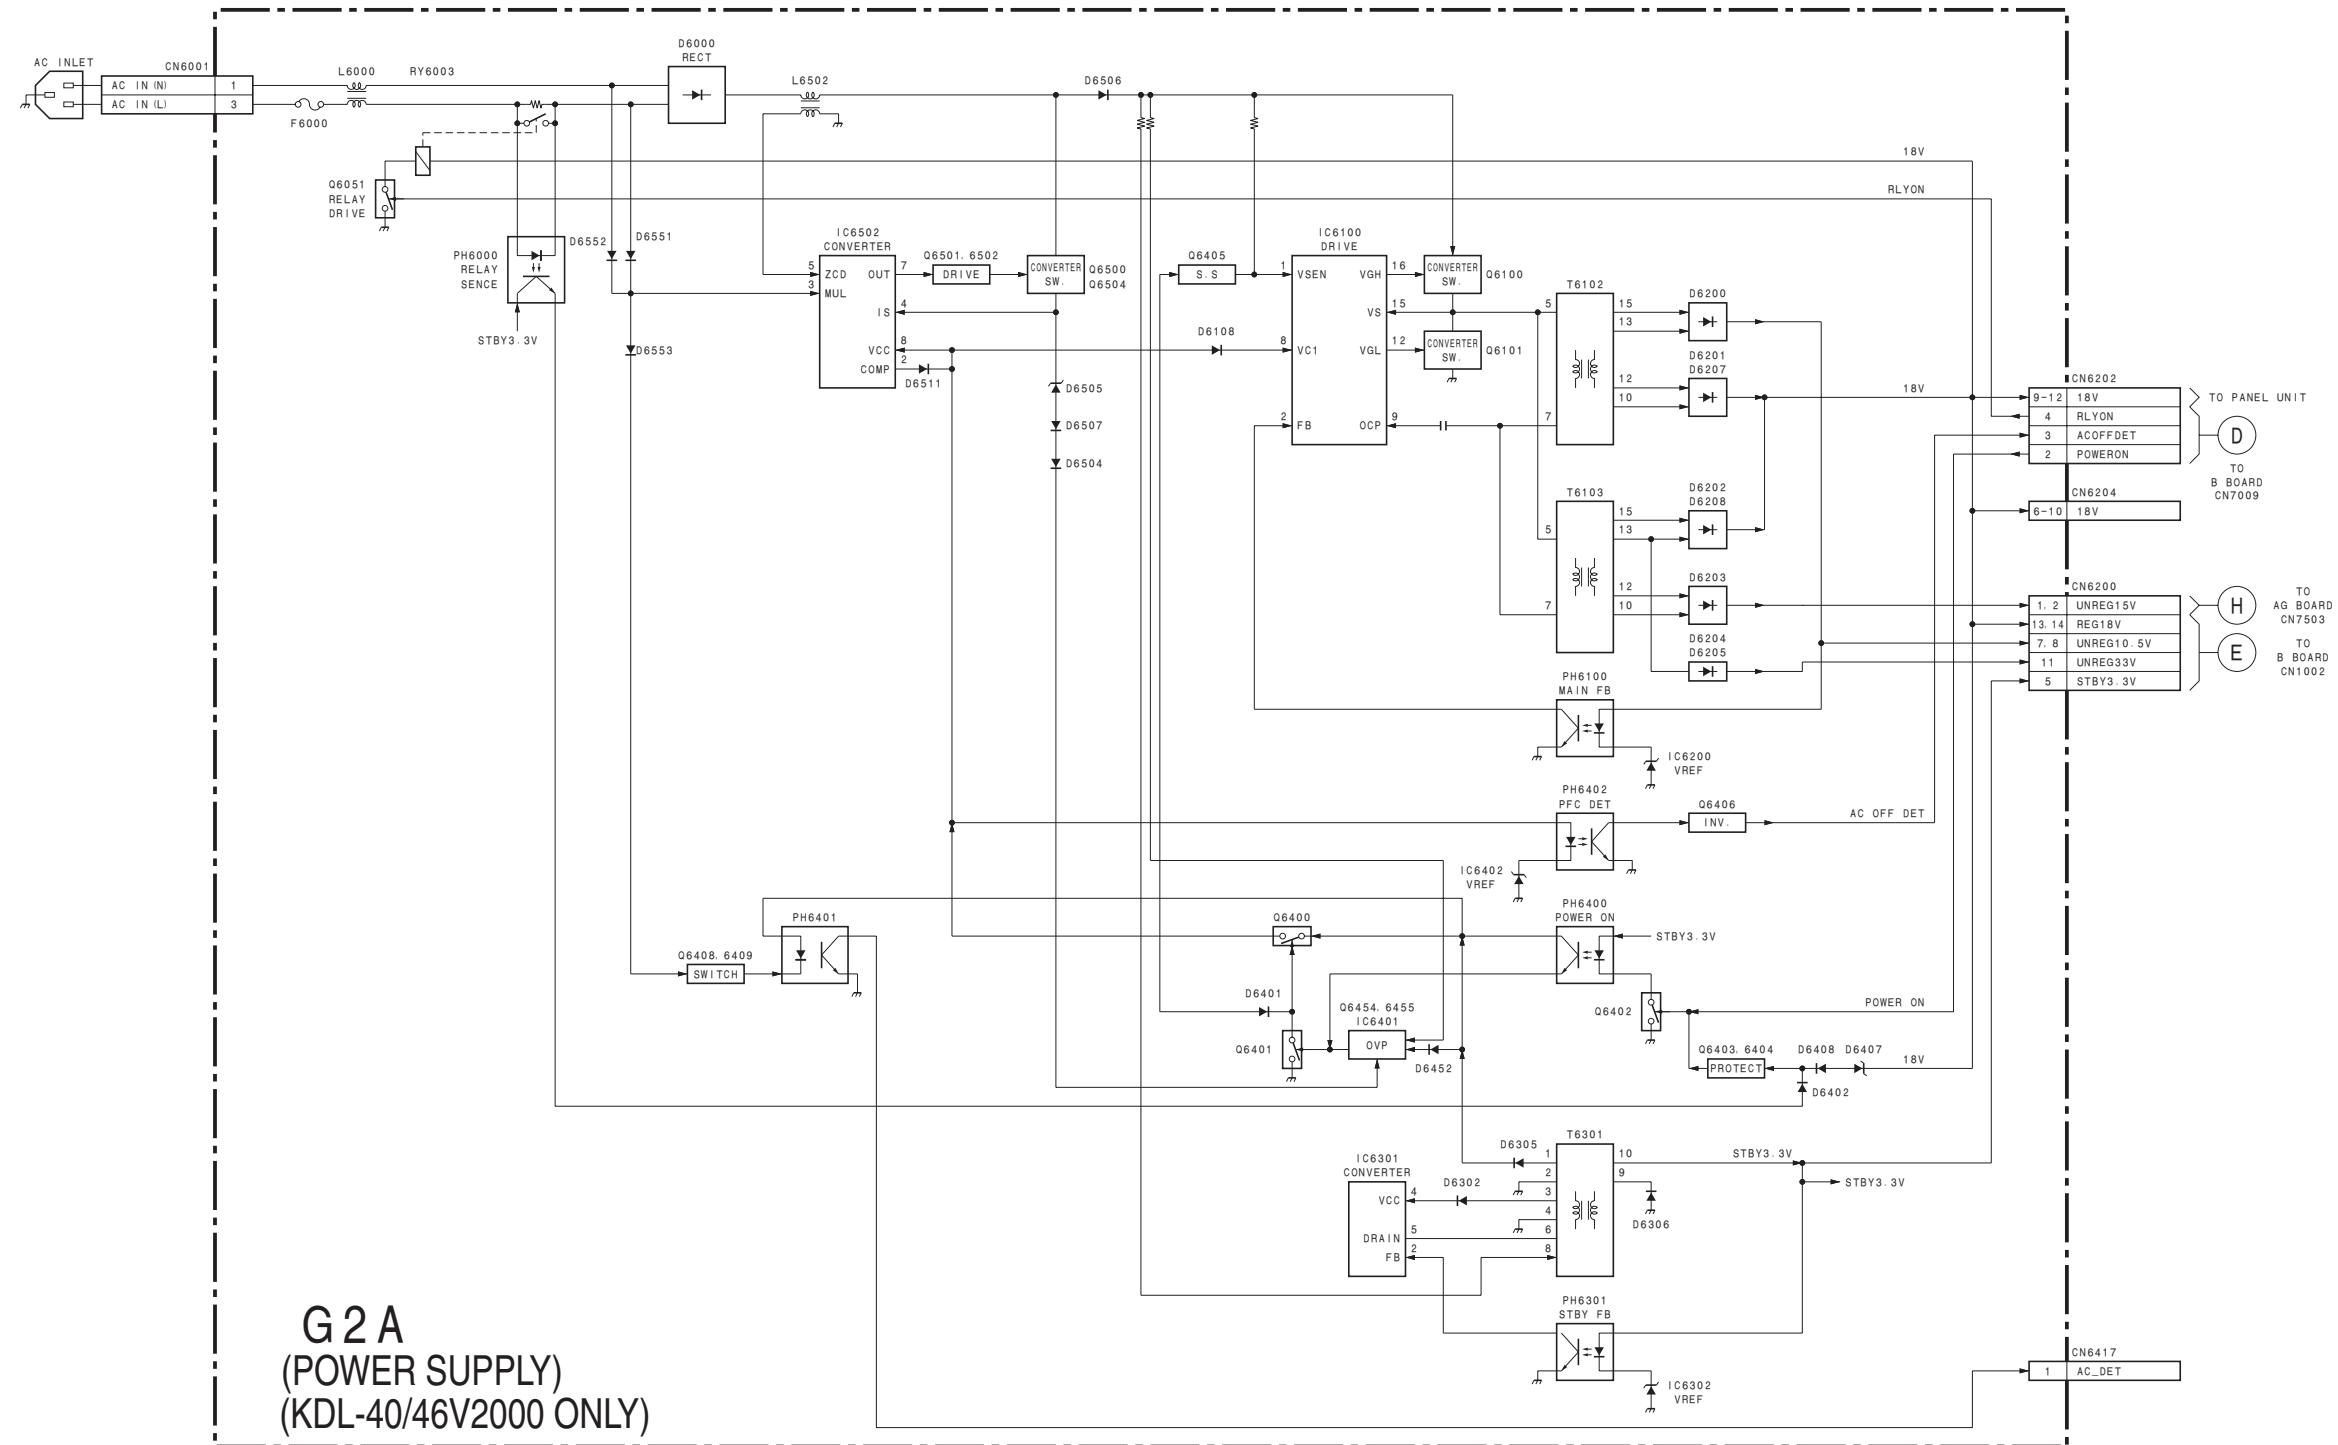

2-3. CIRCUIT BOARDS LOCATION

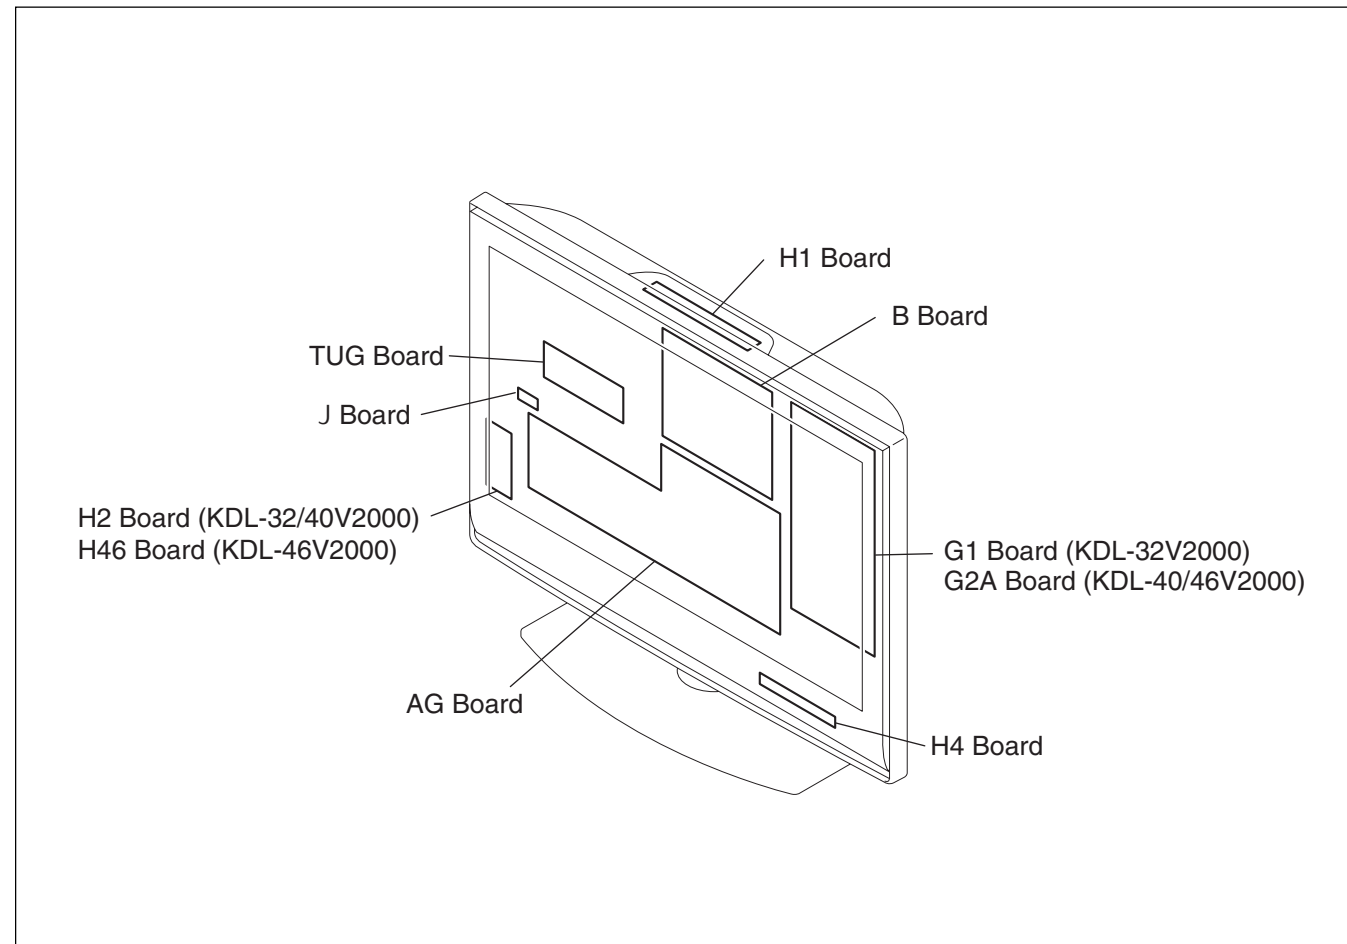

2-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

Note:

- Schematic diagrams and printed wiring boards of the specified boards for board replacement service are not included in this section. See Appendix of this manual if you need them.
- All capacitors are in μF unless otherwise noted. (pF : μF) Capacitors without voltage indication are all 50 V.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm

Rating electrical power 1/4 W (CHIP : 1/10 W)

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- : internal component.
- : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- : earth-ground.
- : earth-chassis.
- When replacing the part in below table, be sure to perform the related adjustment.
- All voltages are in V.
- Readings are taken with a 10 M Ω digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- * : Names and values of parts depend on models.
- * : Can not be measured.
- Circled numbers are waveform references.
- : B + bus.
- : B - bus.
- : Signal path.

Note: The components identified by shading and mark \triangle are critical for safety. Replace only with part number specified.

Note: The components identified by mark contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.


Terminal name of semiconductors in silk screen printed circuit (*):

| | Device | Printed symbol | Terminal name | Circuit |
|---|------------------------|----------------|------------------------------------|---------|
| ① | Transistor | | Collector Base Emitter | |
| ② | Transistor | | Collector Base Emitter | |
| ③ | Diode | | Cathode Anode | |
| ④ | Diode | | Cathode Anode (NC) | |
| ⑤ | Diode | | Cathode Anode (NC) | |
| ⑥ | Diode | | Common Anode Cathode | |
| ⑦ | Diode | | Common Anode Cathode | |
| ⑧ | Diode | | Common Anode Anode | |
| ⑨ | Diode | | Common Anode Anode | |
| ⑩ | Diode | | Common Cathode Cathode | |
| ⑪ | Diode | | Common Cathode Cathode | |
| ⑫ | Diode | | Anode Anode Cathode Anode | |
| ⑬ | Transistor (FET) | | Drain Source Gate | |
| ⑭ | Transistor (FET) | | Drain Source Gate | |
| ⑮ | Transistor (FET) | | Source Drain Gate | |
| ⑯ | Transistor | | Emitter Collector Base | |
| ⑰ | Transistor | | C2 B1 E1 E2 B2 C1 | |
| ⑱ | Transistor | | C1 B2 E2 E1 B1 C2 | |
| ⑲ | Transistor | | C1 B2 E2 E1 B1 C2 | |
| ⑳ | Transistor | | C1 B2 E2 E1 B1 C2 | |
| ㉑ | Transistor | | E2 B1 E1 C2 C1(B2) | |
| ㉒ | Transistor | | (B2) B1 E1 E2 C1 C2 | |
| ㉓ | Transistor | | (B2) E2 E1 B1 C2 C1 | |
| — | Discrete semiconductor | | | |

(Chip semiconductors that are not actually used are included.)

Ver.1.6


(1) AG Board (1/2-2/2)

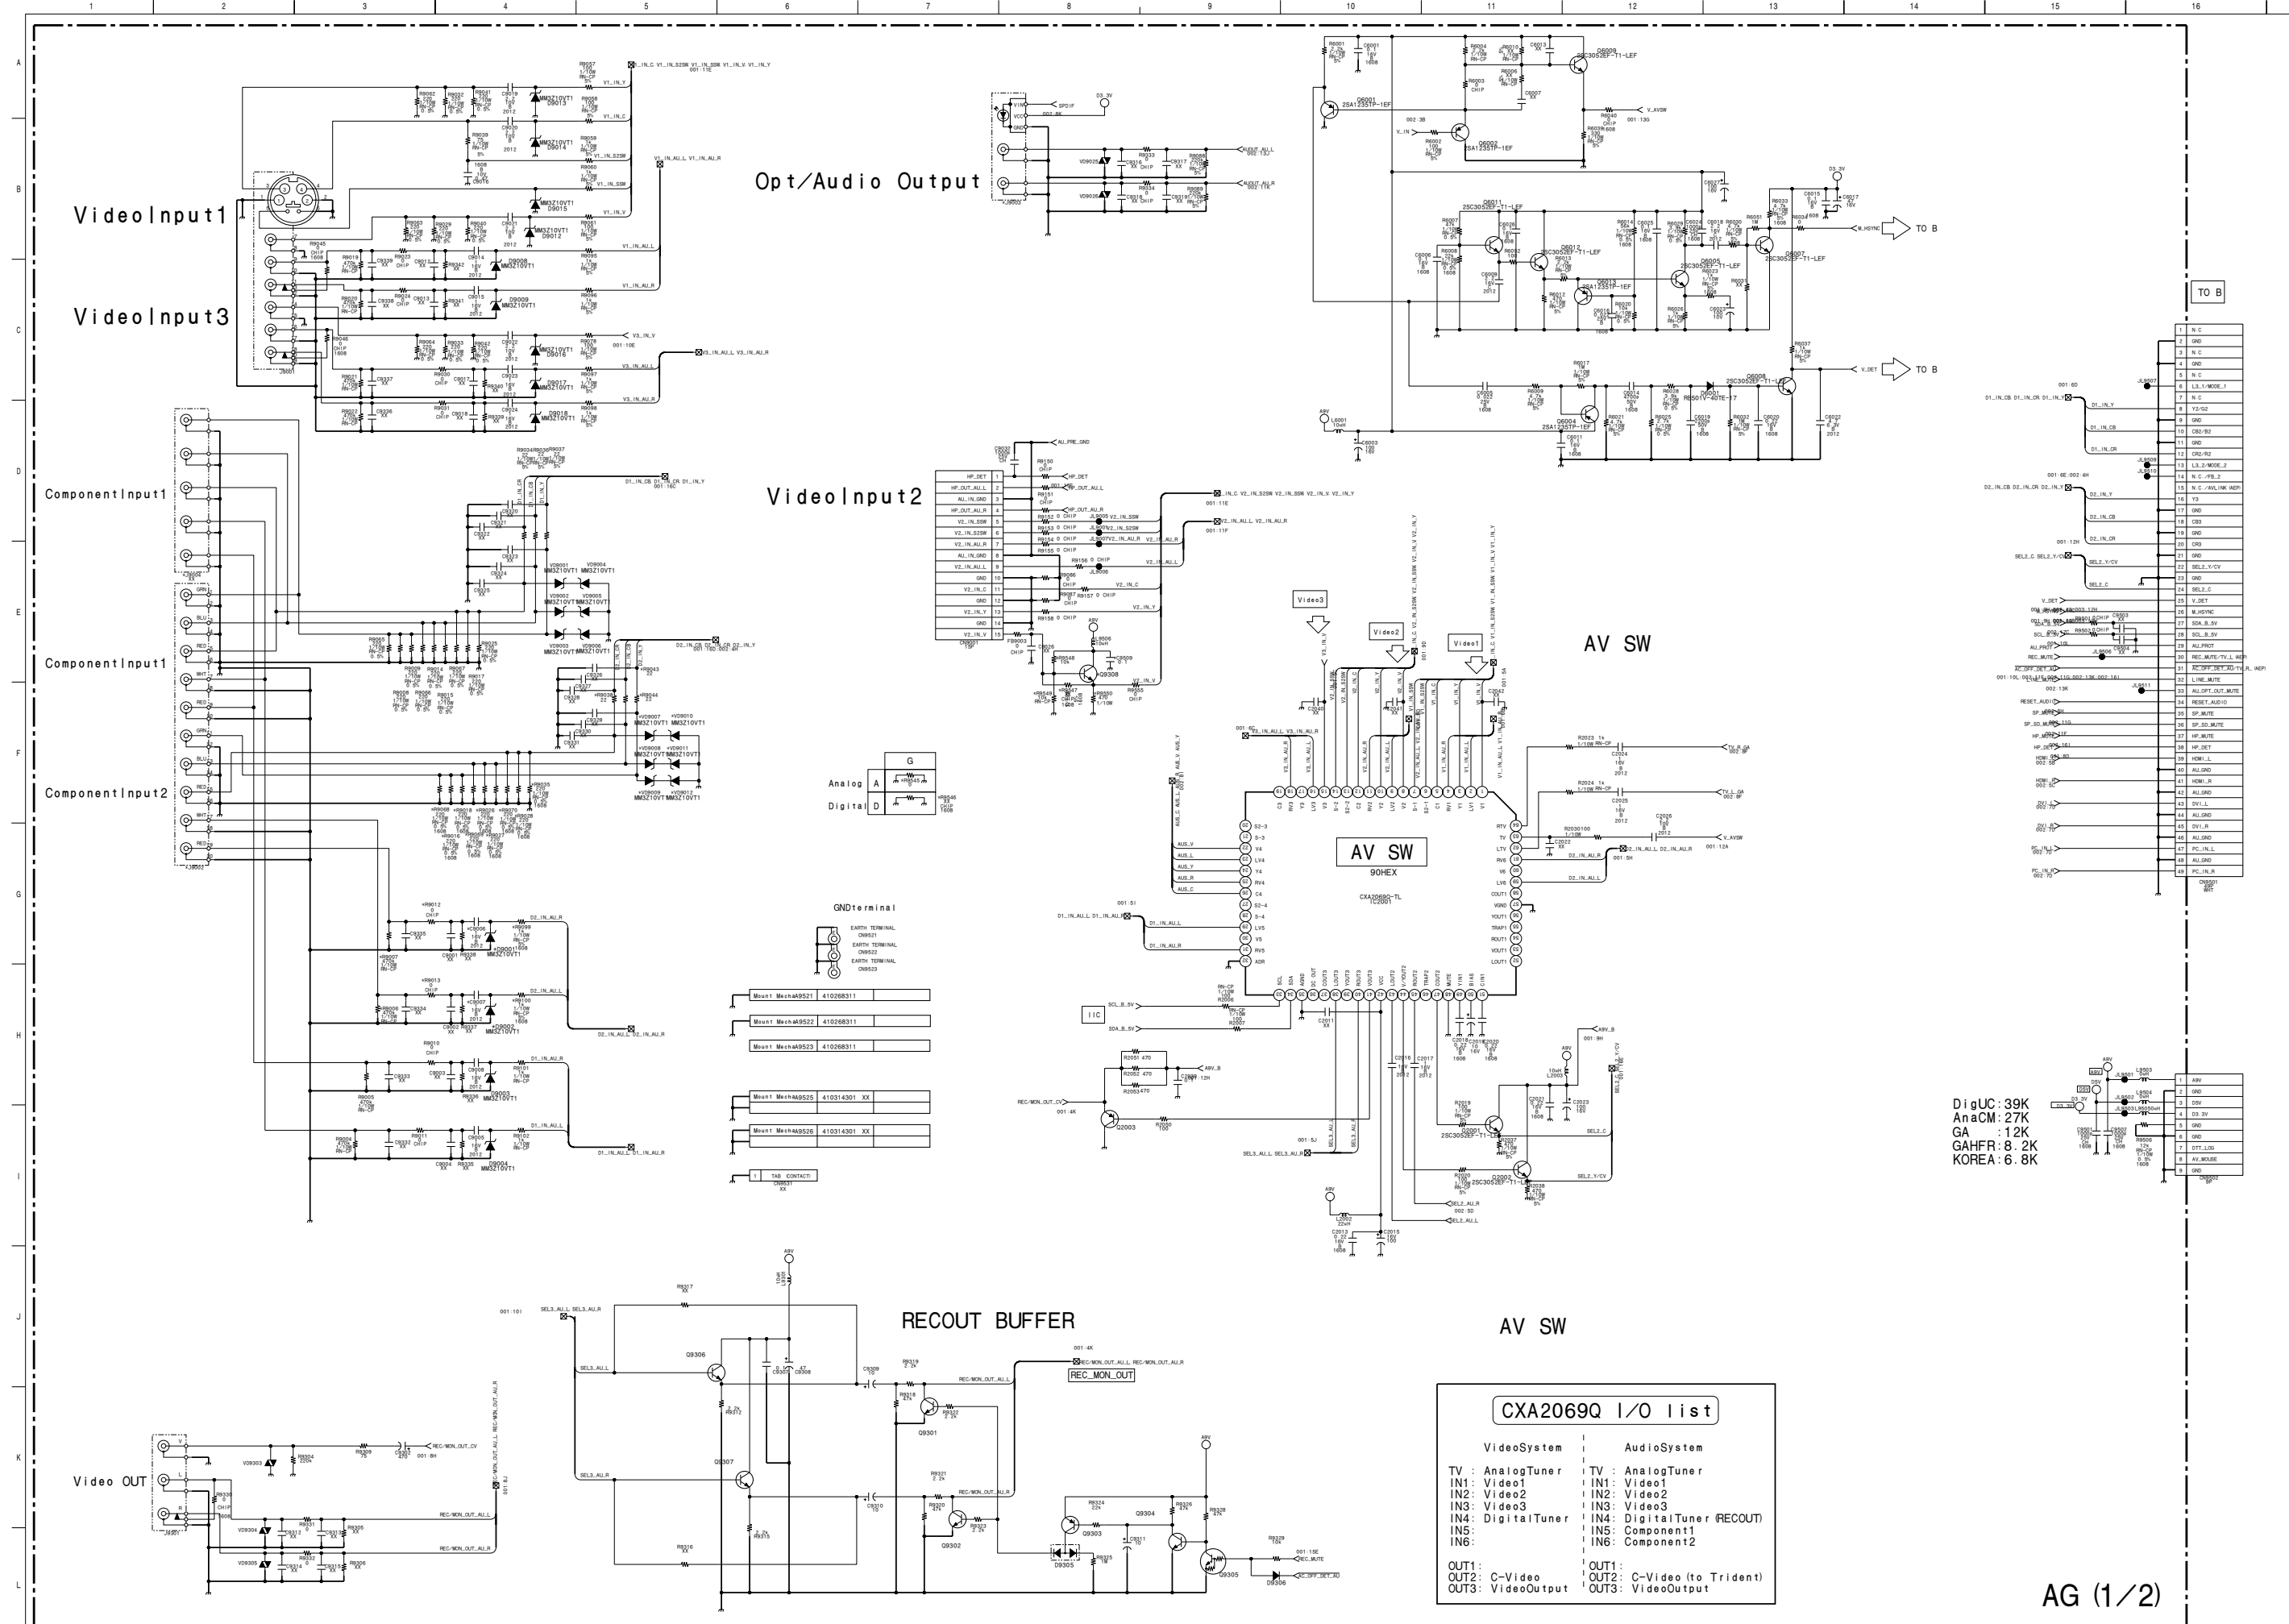

DigUC: 39K
 AnaCM: 27K
 GA : 12K
 GAHFR: 8. 2K
 KOREA: 6. 8K

| CXA2069Q I/O list | |
|-------------------|----------------------------|
| VideoSystem | AudioSystem |
| TV : AnalogTuner | TV : AnalogTuner |
| IN1: Video1 | IN1: Video1 |
| IN2: Video2 | IN2: Video2 |
| IN3: Video3 | IN3: Video3 |
| IN4: DigitalTuner | IN4: DigitalTuner RECOUT |
| IN5: Component1 | IN5: Component1 |
| IN6: Component2 | IN6: Component2 |
| OUT1: C-Video | OUT1: C-Video (to Trident) |
| OUT2: VideoOutput | OUT2: VideoOutput |
| OUT3: VideoOutput | OUT3: VideoOutput |


AG (1/2)

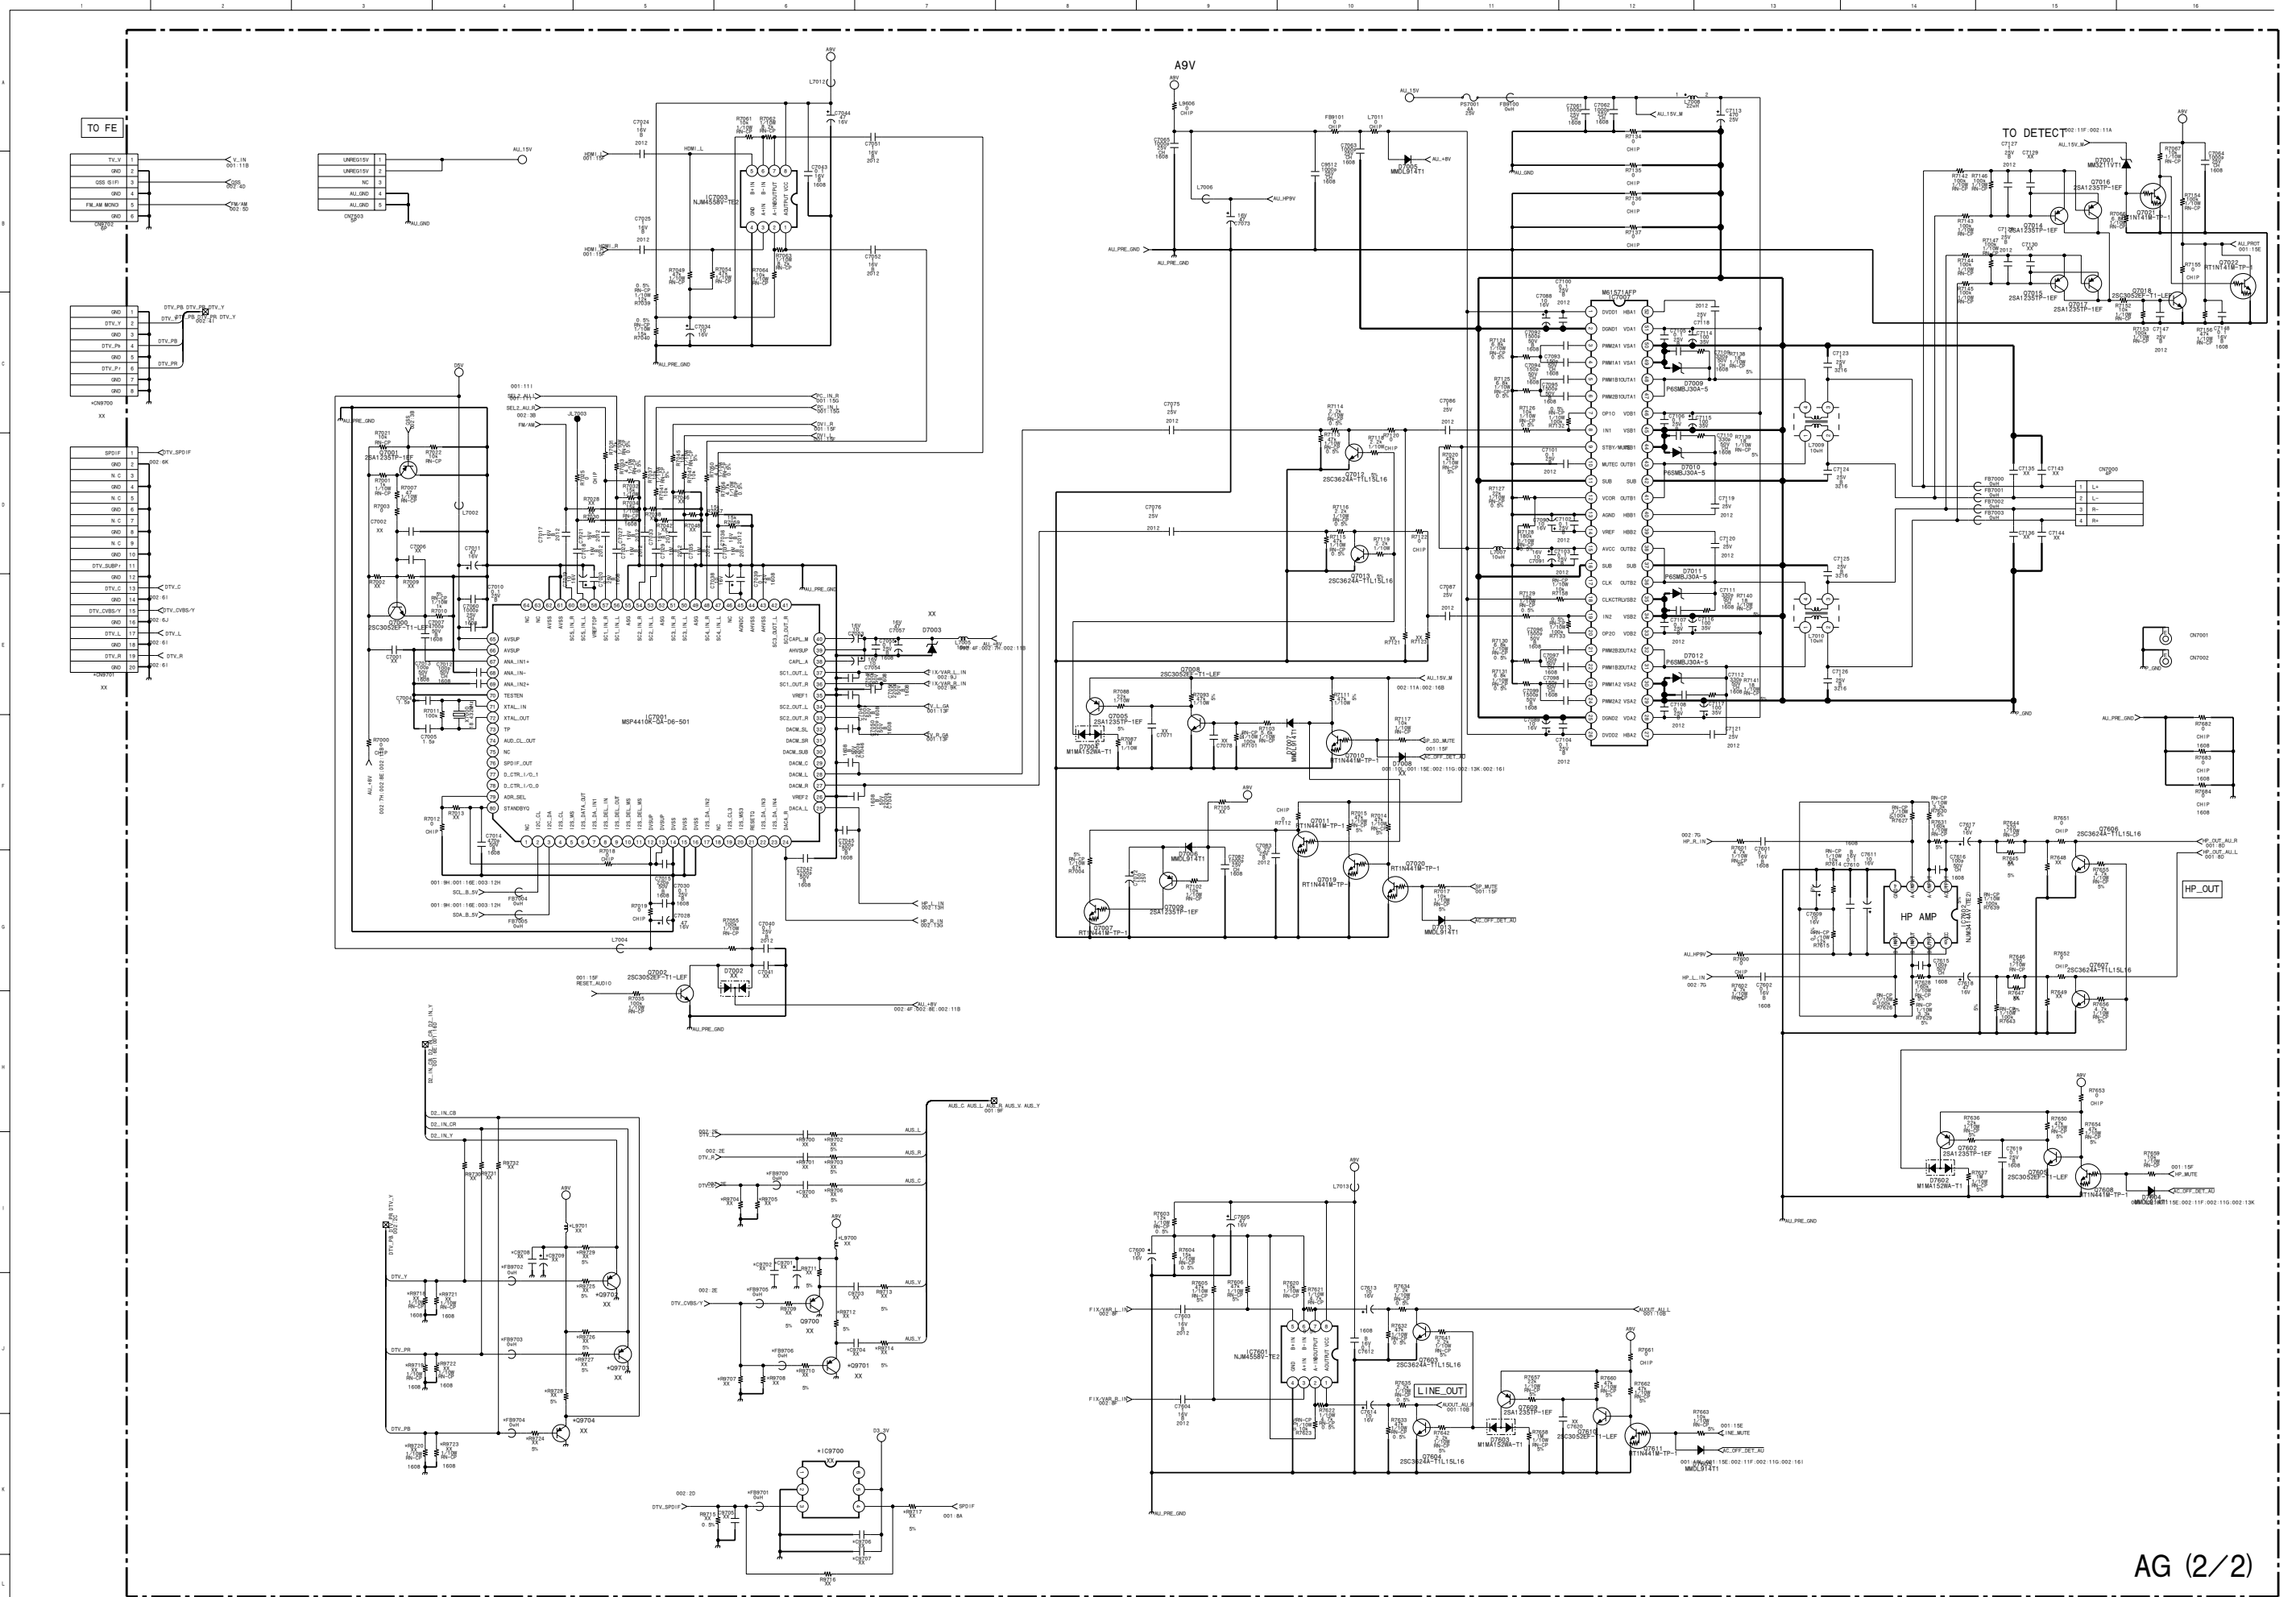

AG (2/2)


— AG BOARD —

AG BOARD (A)

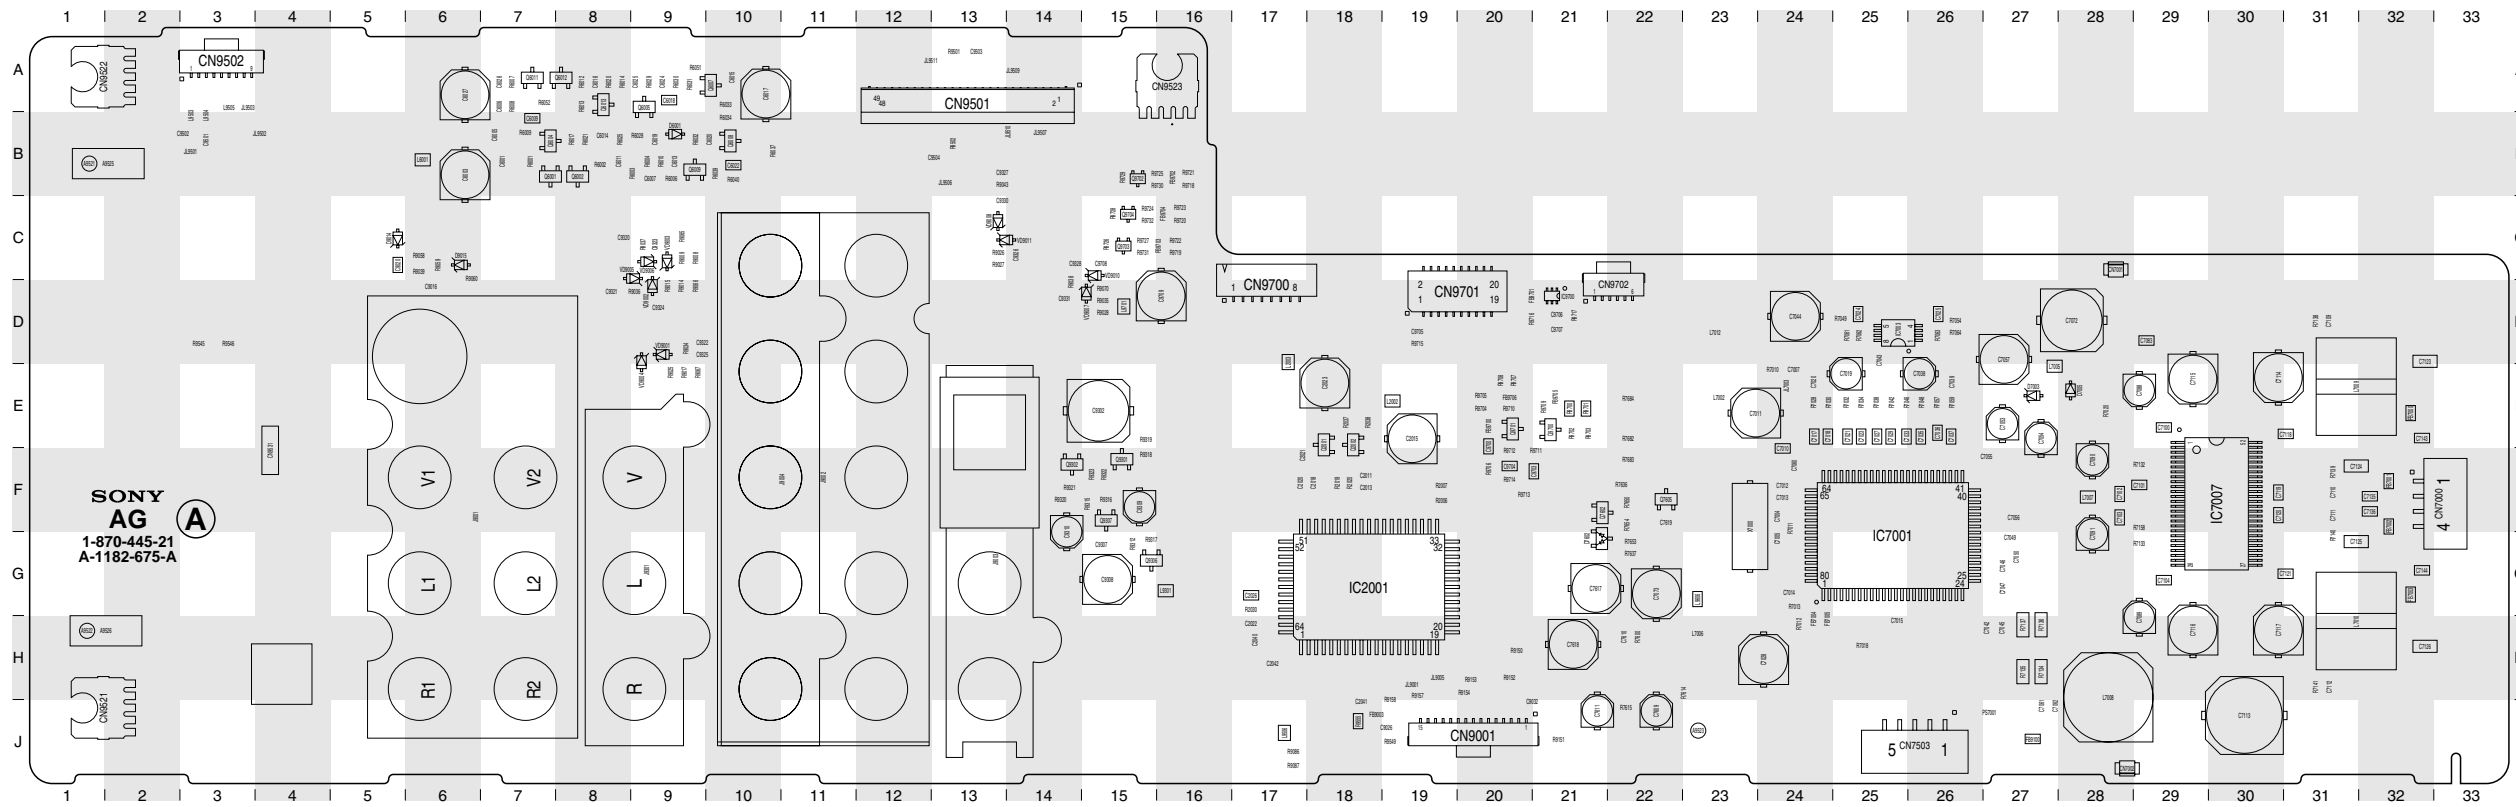

<COMPONENT SIDE>

AG BOARD (B)

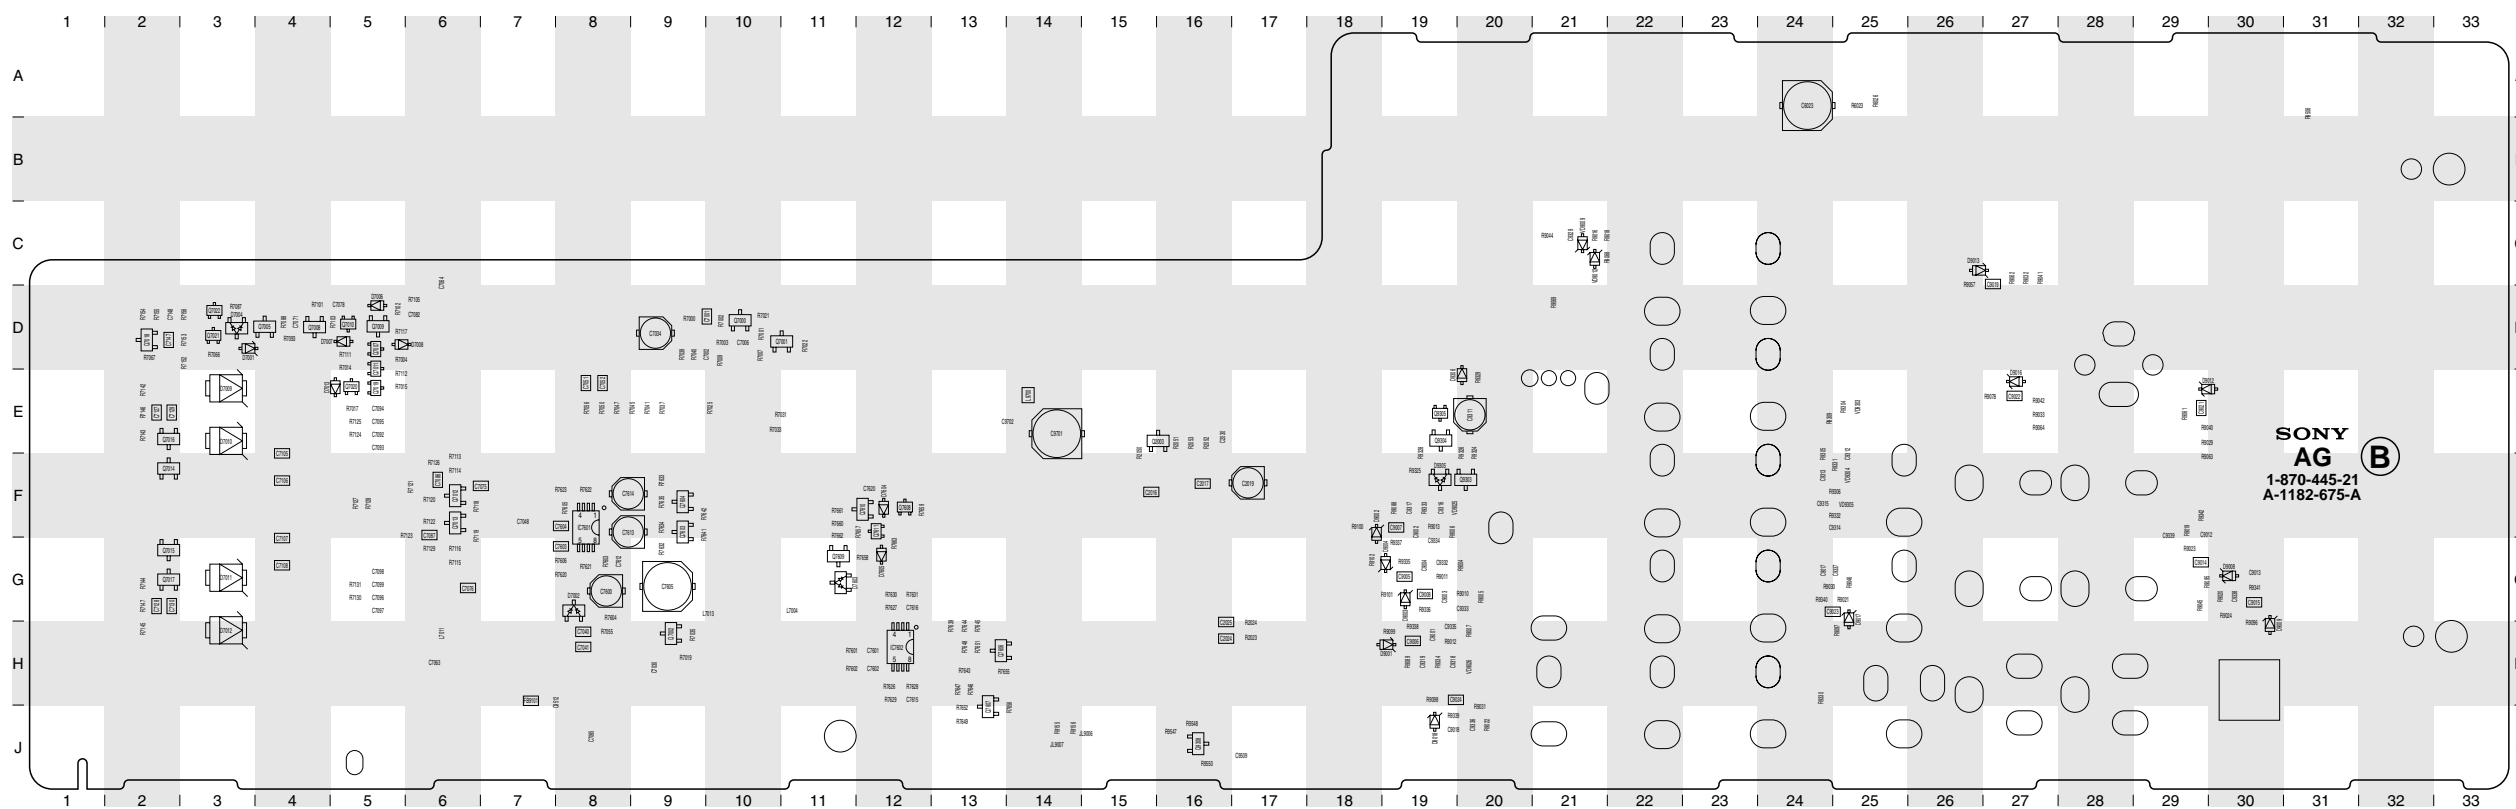



<CONDUCTOR SIDE>

A
B
C
D
E
F
G
H

WAX2 B_BOARD

| | | | |
|---------|---------|-------------------|-----------|
| Page.1 | 001.sht | Table of Contents | |
| Page.2 | 002.sht | MAIN μ CON | ref.1001~ |
| Page.3 | 003.sht | SVP-PX (1/2) | ref.5000~ |
| Page.4 | 004.sht | SVP-PX (2/2) | ref.5200~ |
| Page.5 | 005.sht | DDR SDRAM | ref.5500~ |
| Page.6 | 006.sht | AUTO WIDE | ref.5700~ |
| Page.7 | 007.sht | PC Connector | ref.6000~ |
| Page.8 | 008.sht | HDMI & D/A | ref.9000~ |
| Page.9 | 009.sht | POWER | ref.7000~ |
| Page.10 | 010.sht | DC_ALERT | ref.7500~ |
| Page.11 | 011.sht | B TO F/E | ref.4700~ |
| Page.12 | 012.sht | B TO TUNER | ref.1700~ |

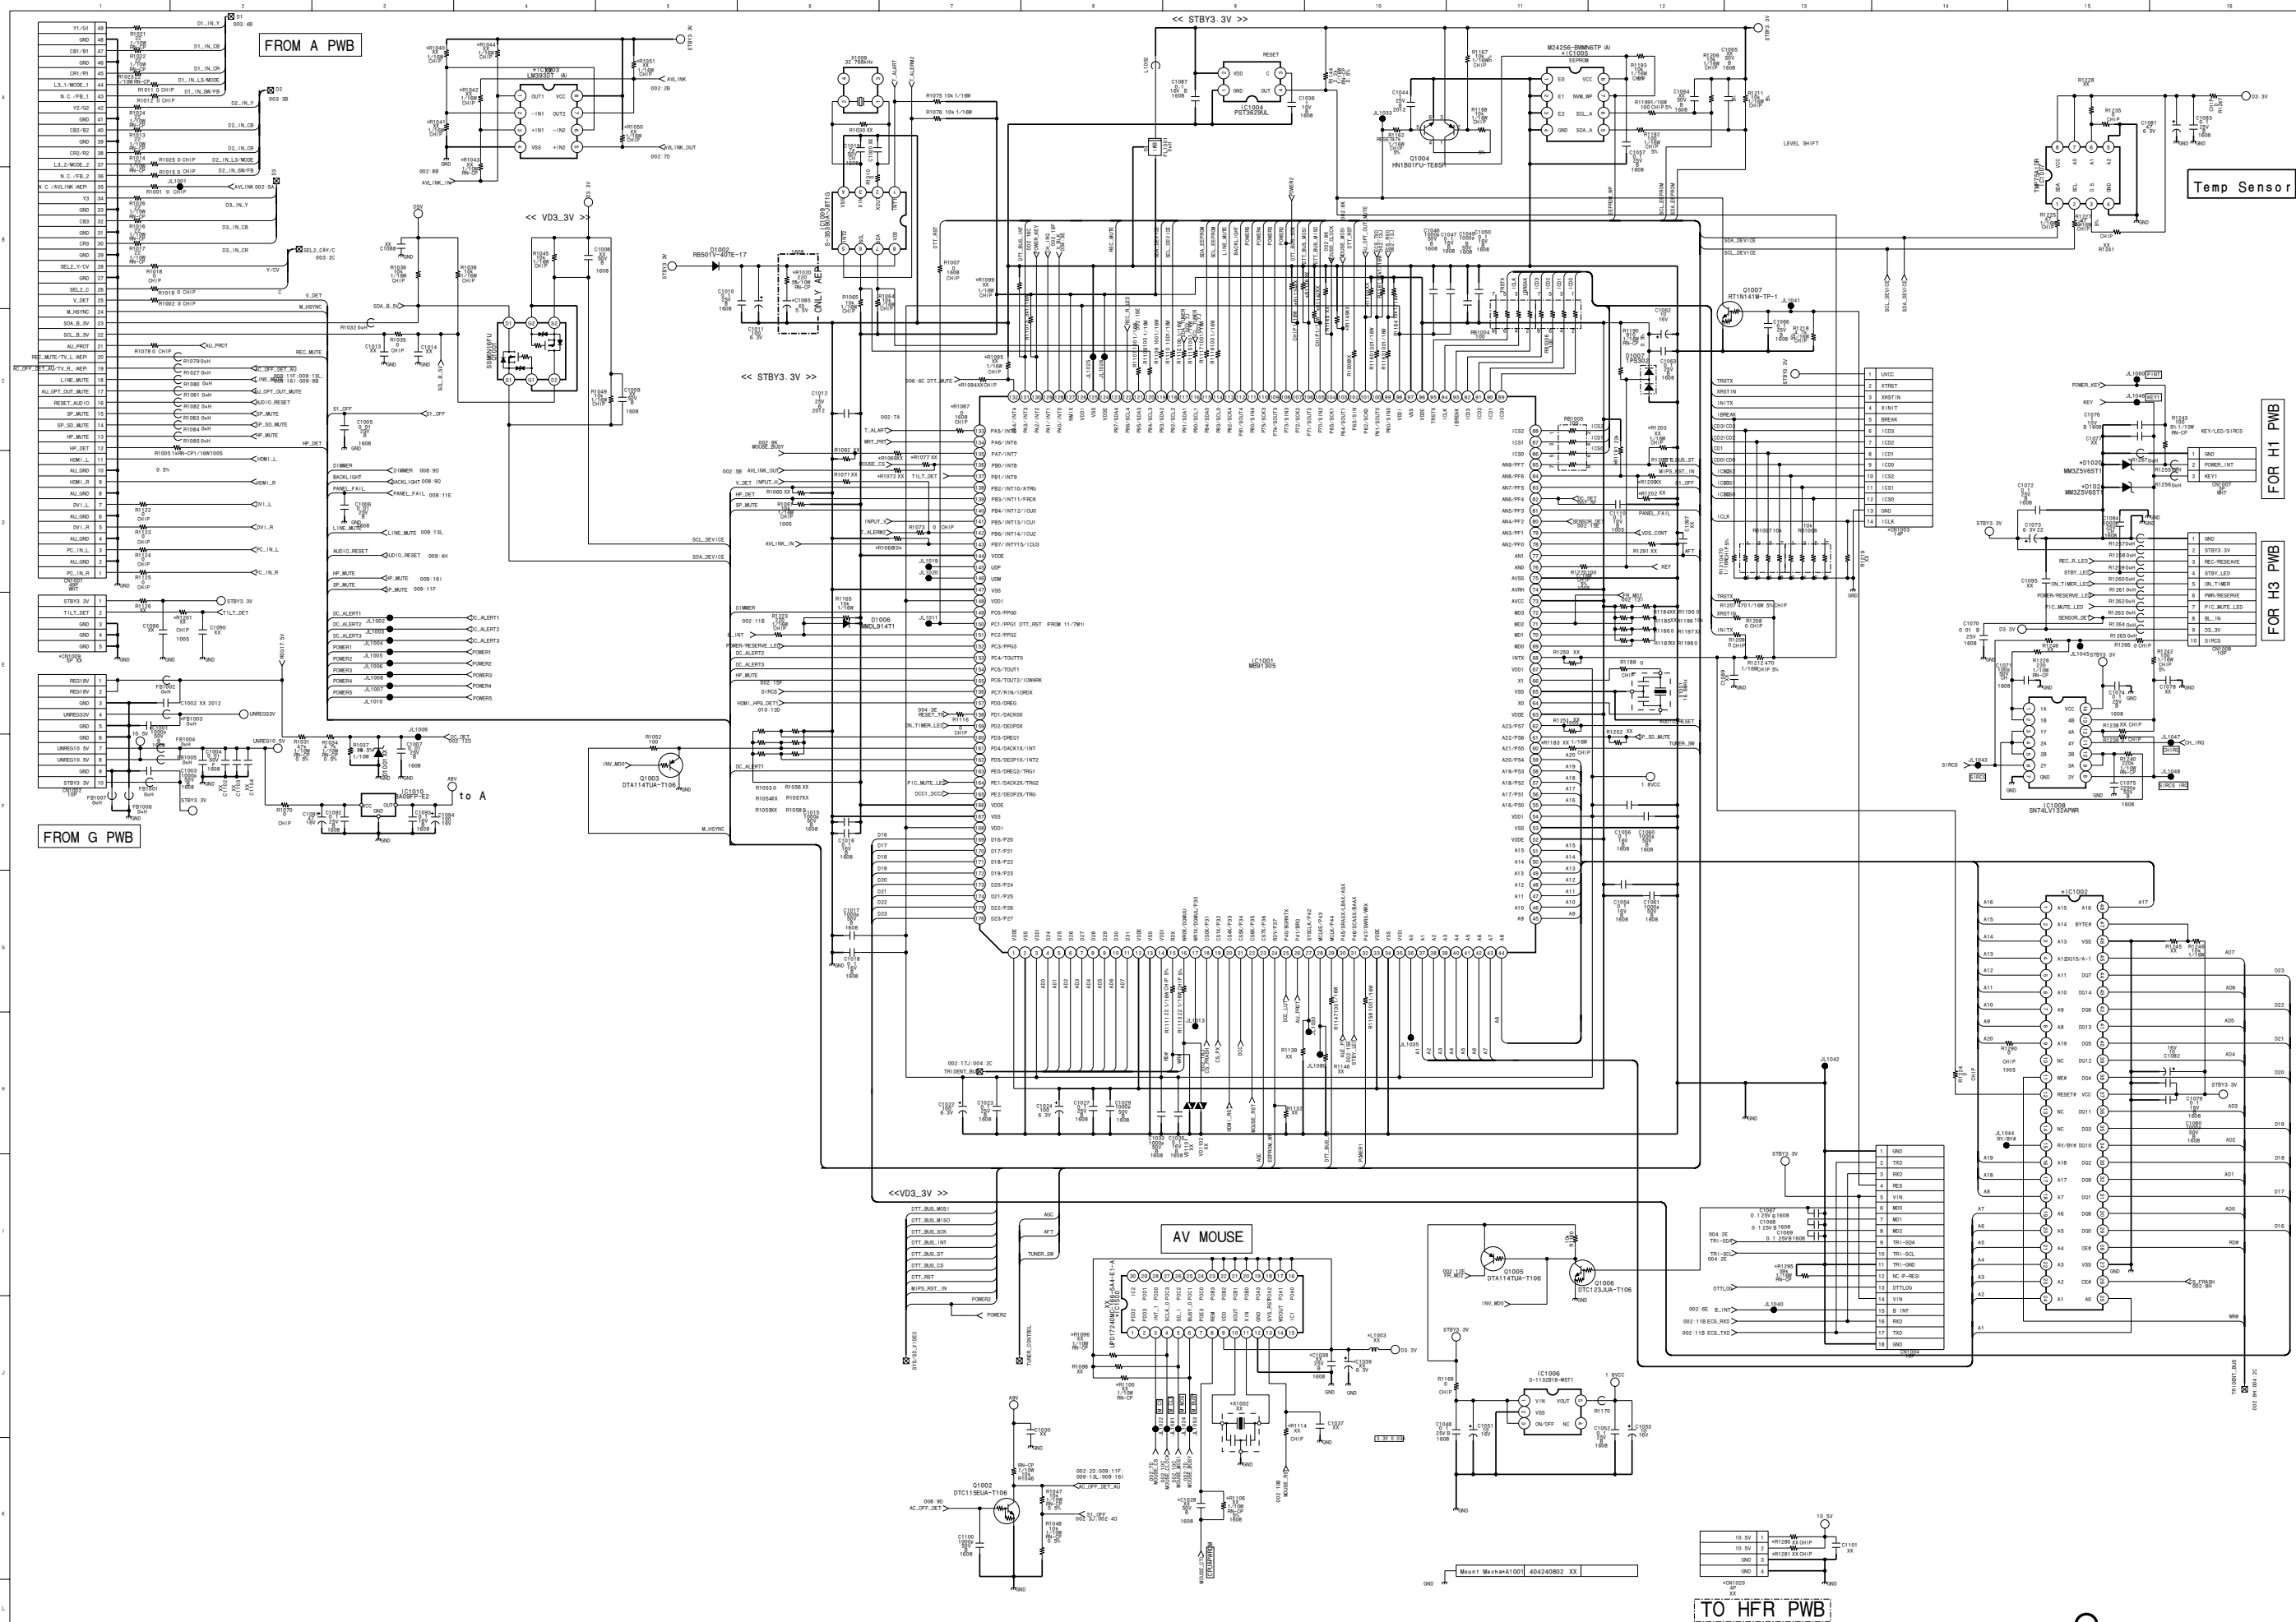


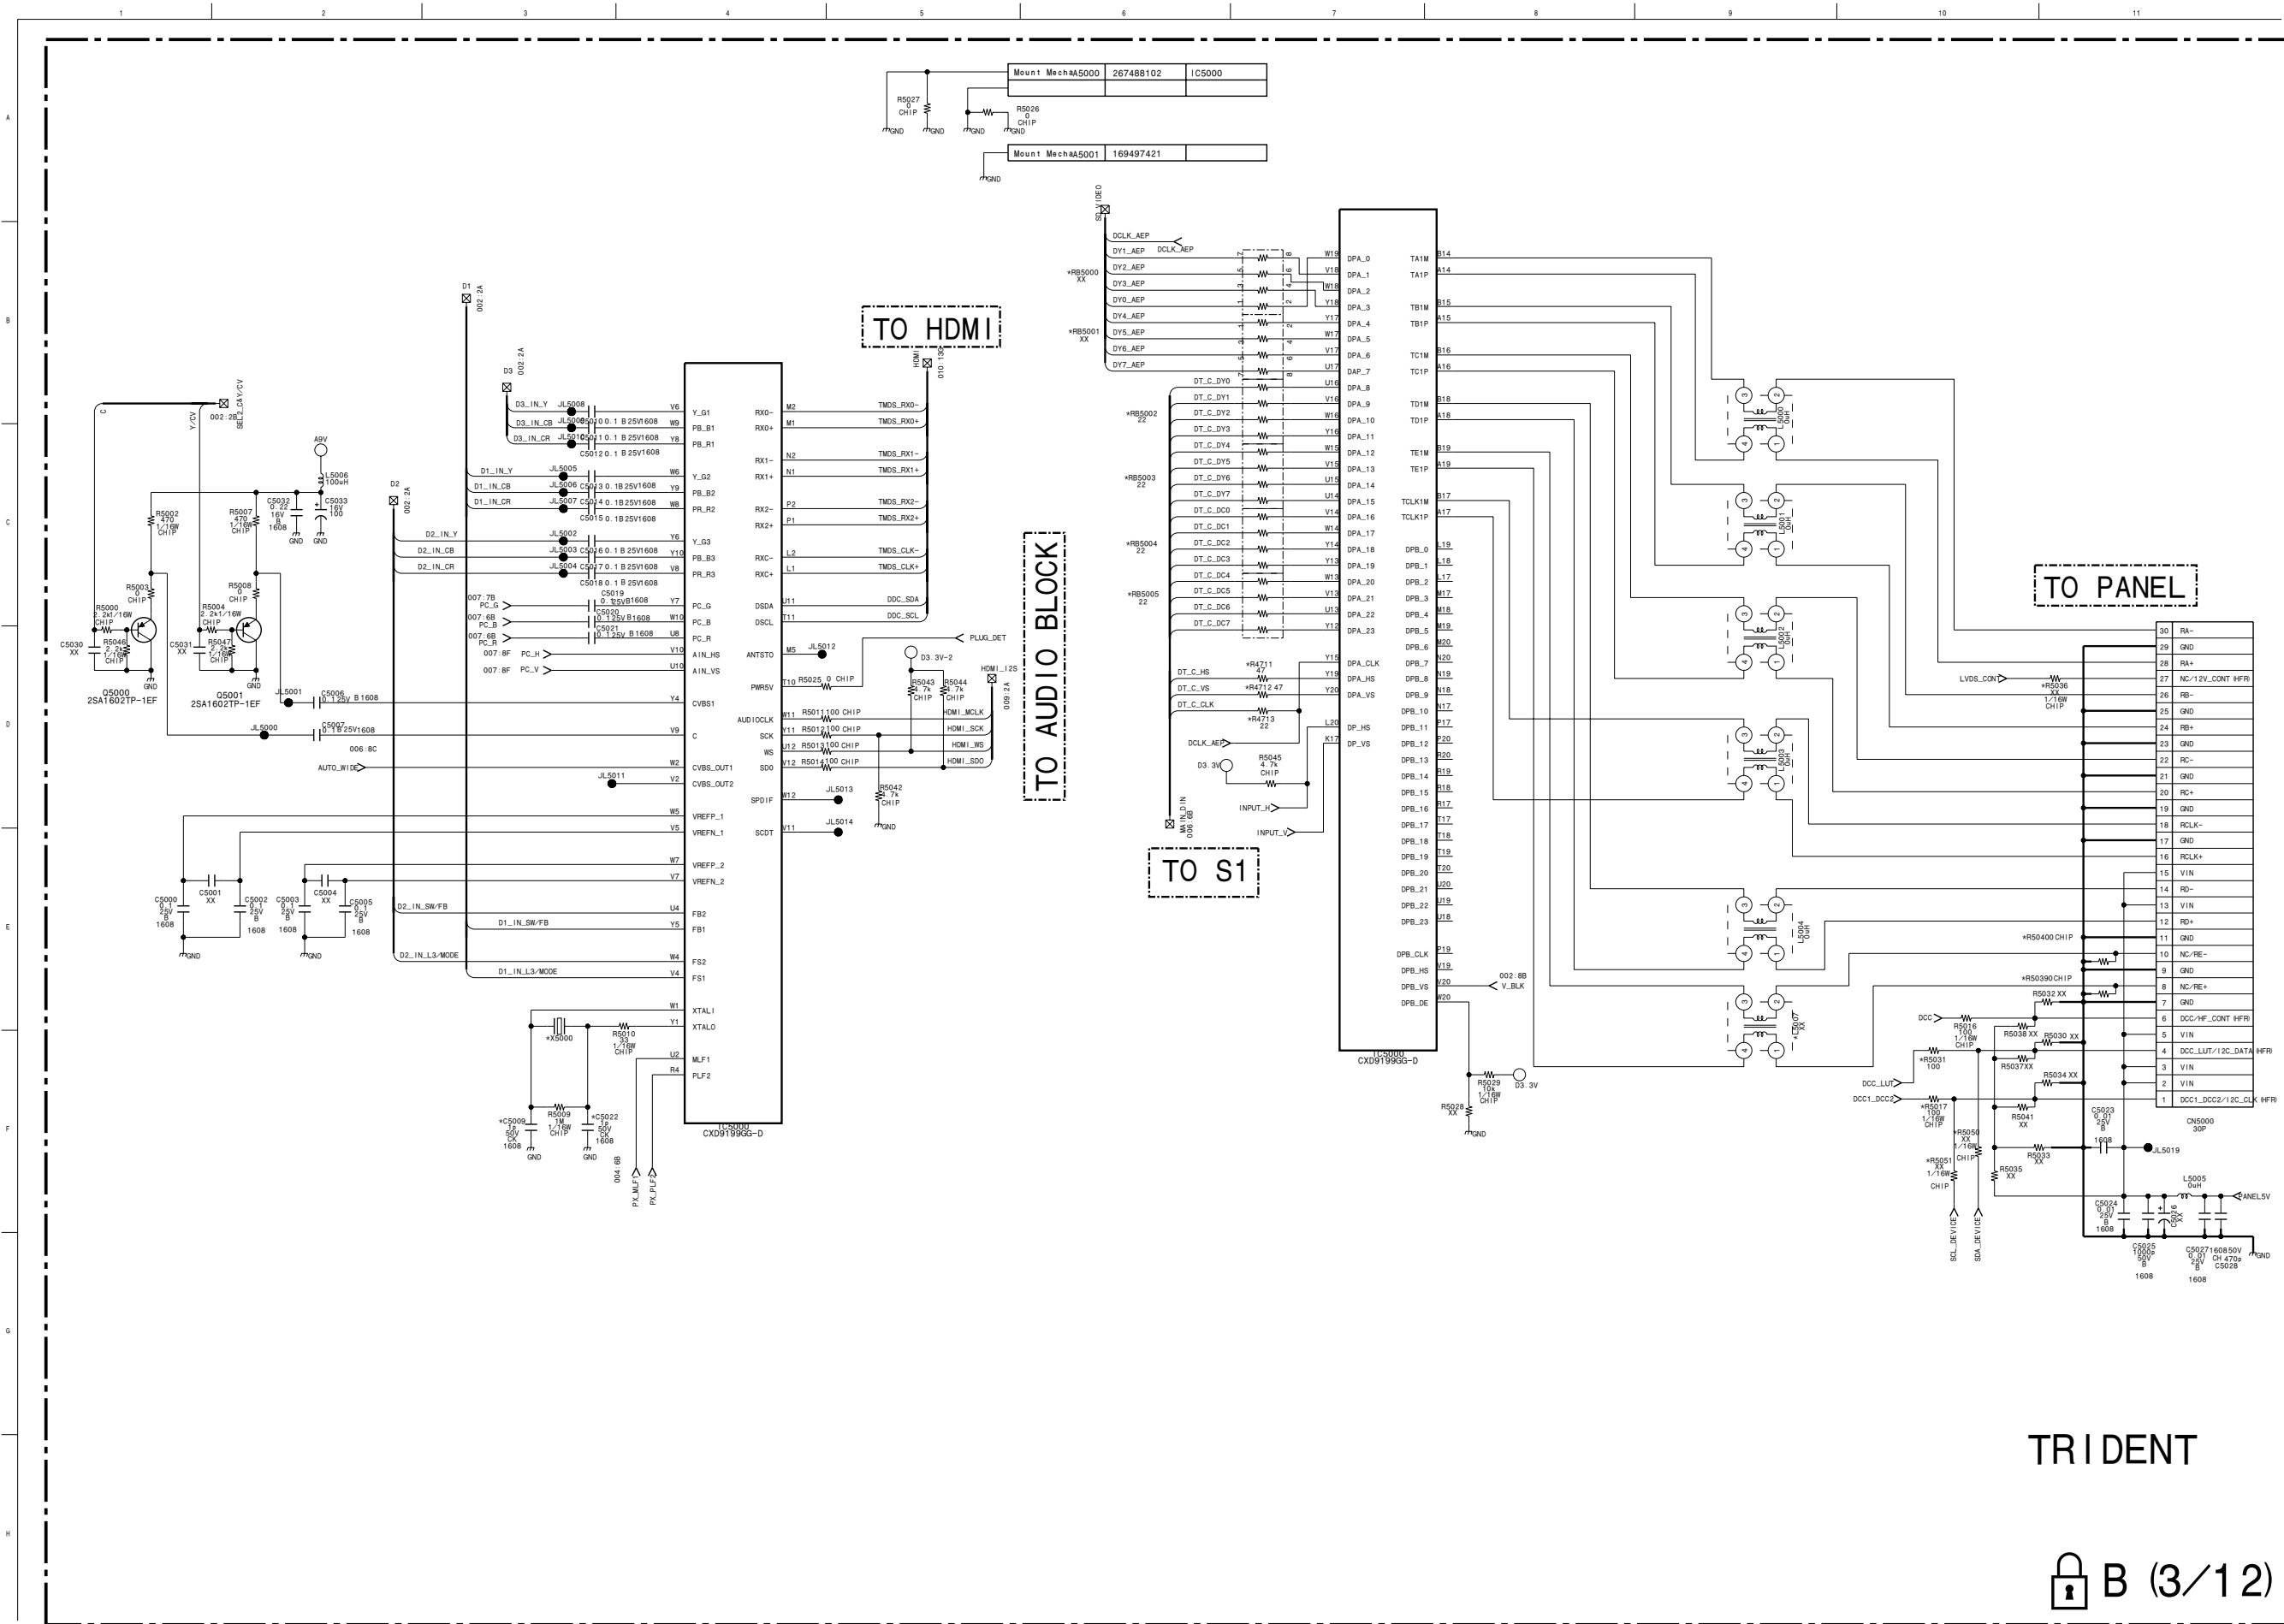

TRIDENT

B (3/12)

SVP-PX (2/2) DDR & CPU I/F, POWER & GND

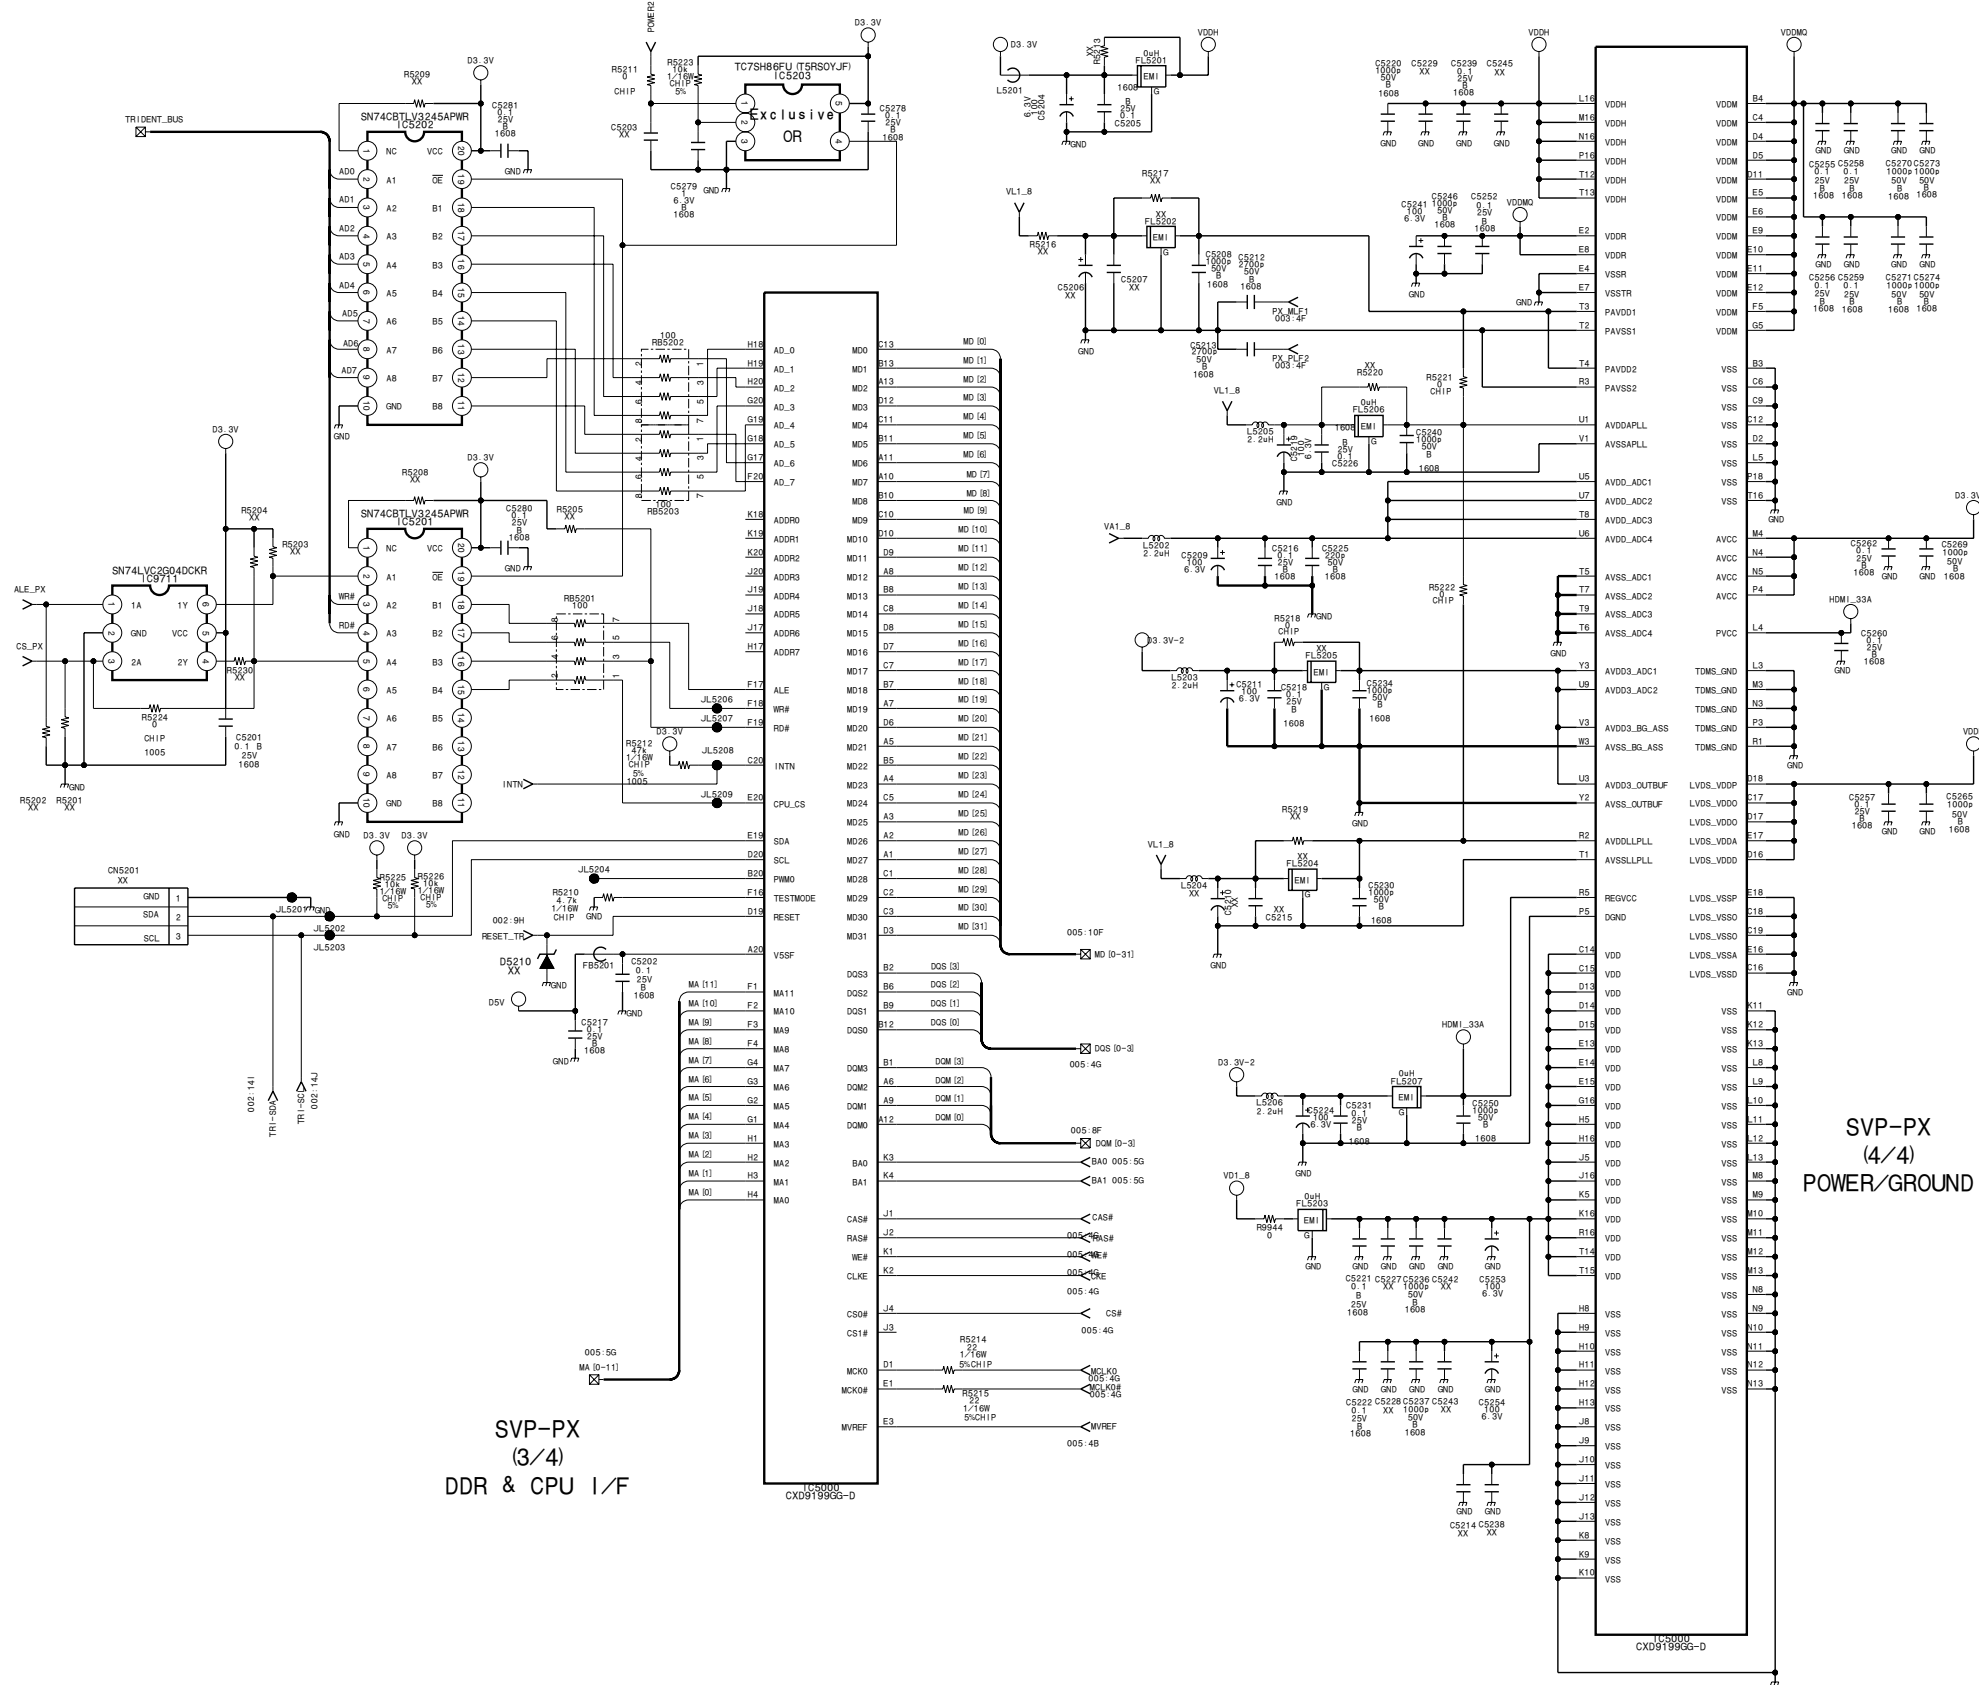


SVP-PX (3/4) DDR & CPU I/F

SVP-PX (4/4) POWER/GROUND


TRIDENT

B (4/12)

DDR_SDRAM 128Mb i t

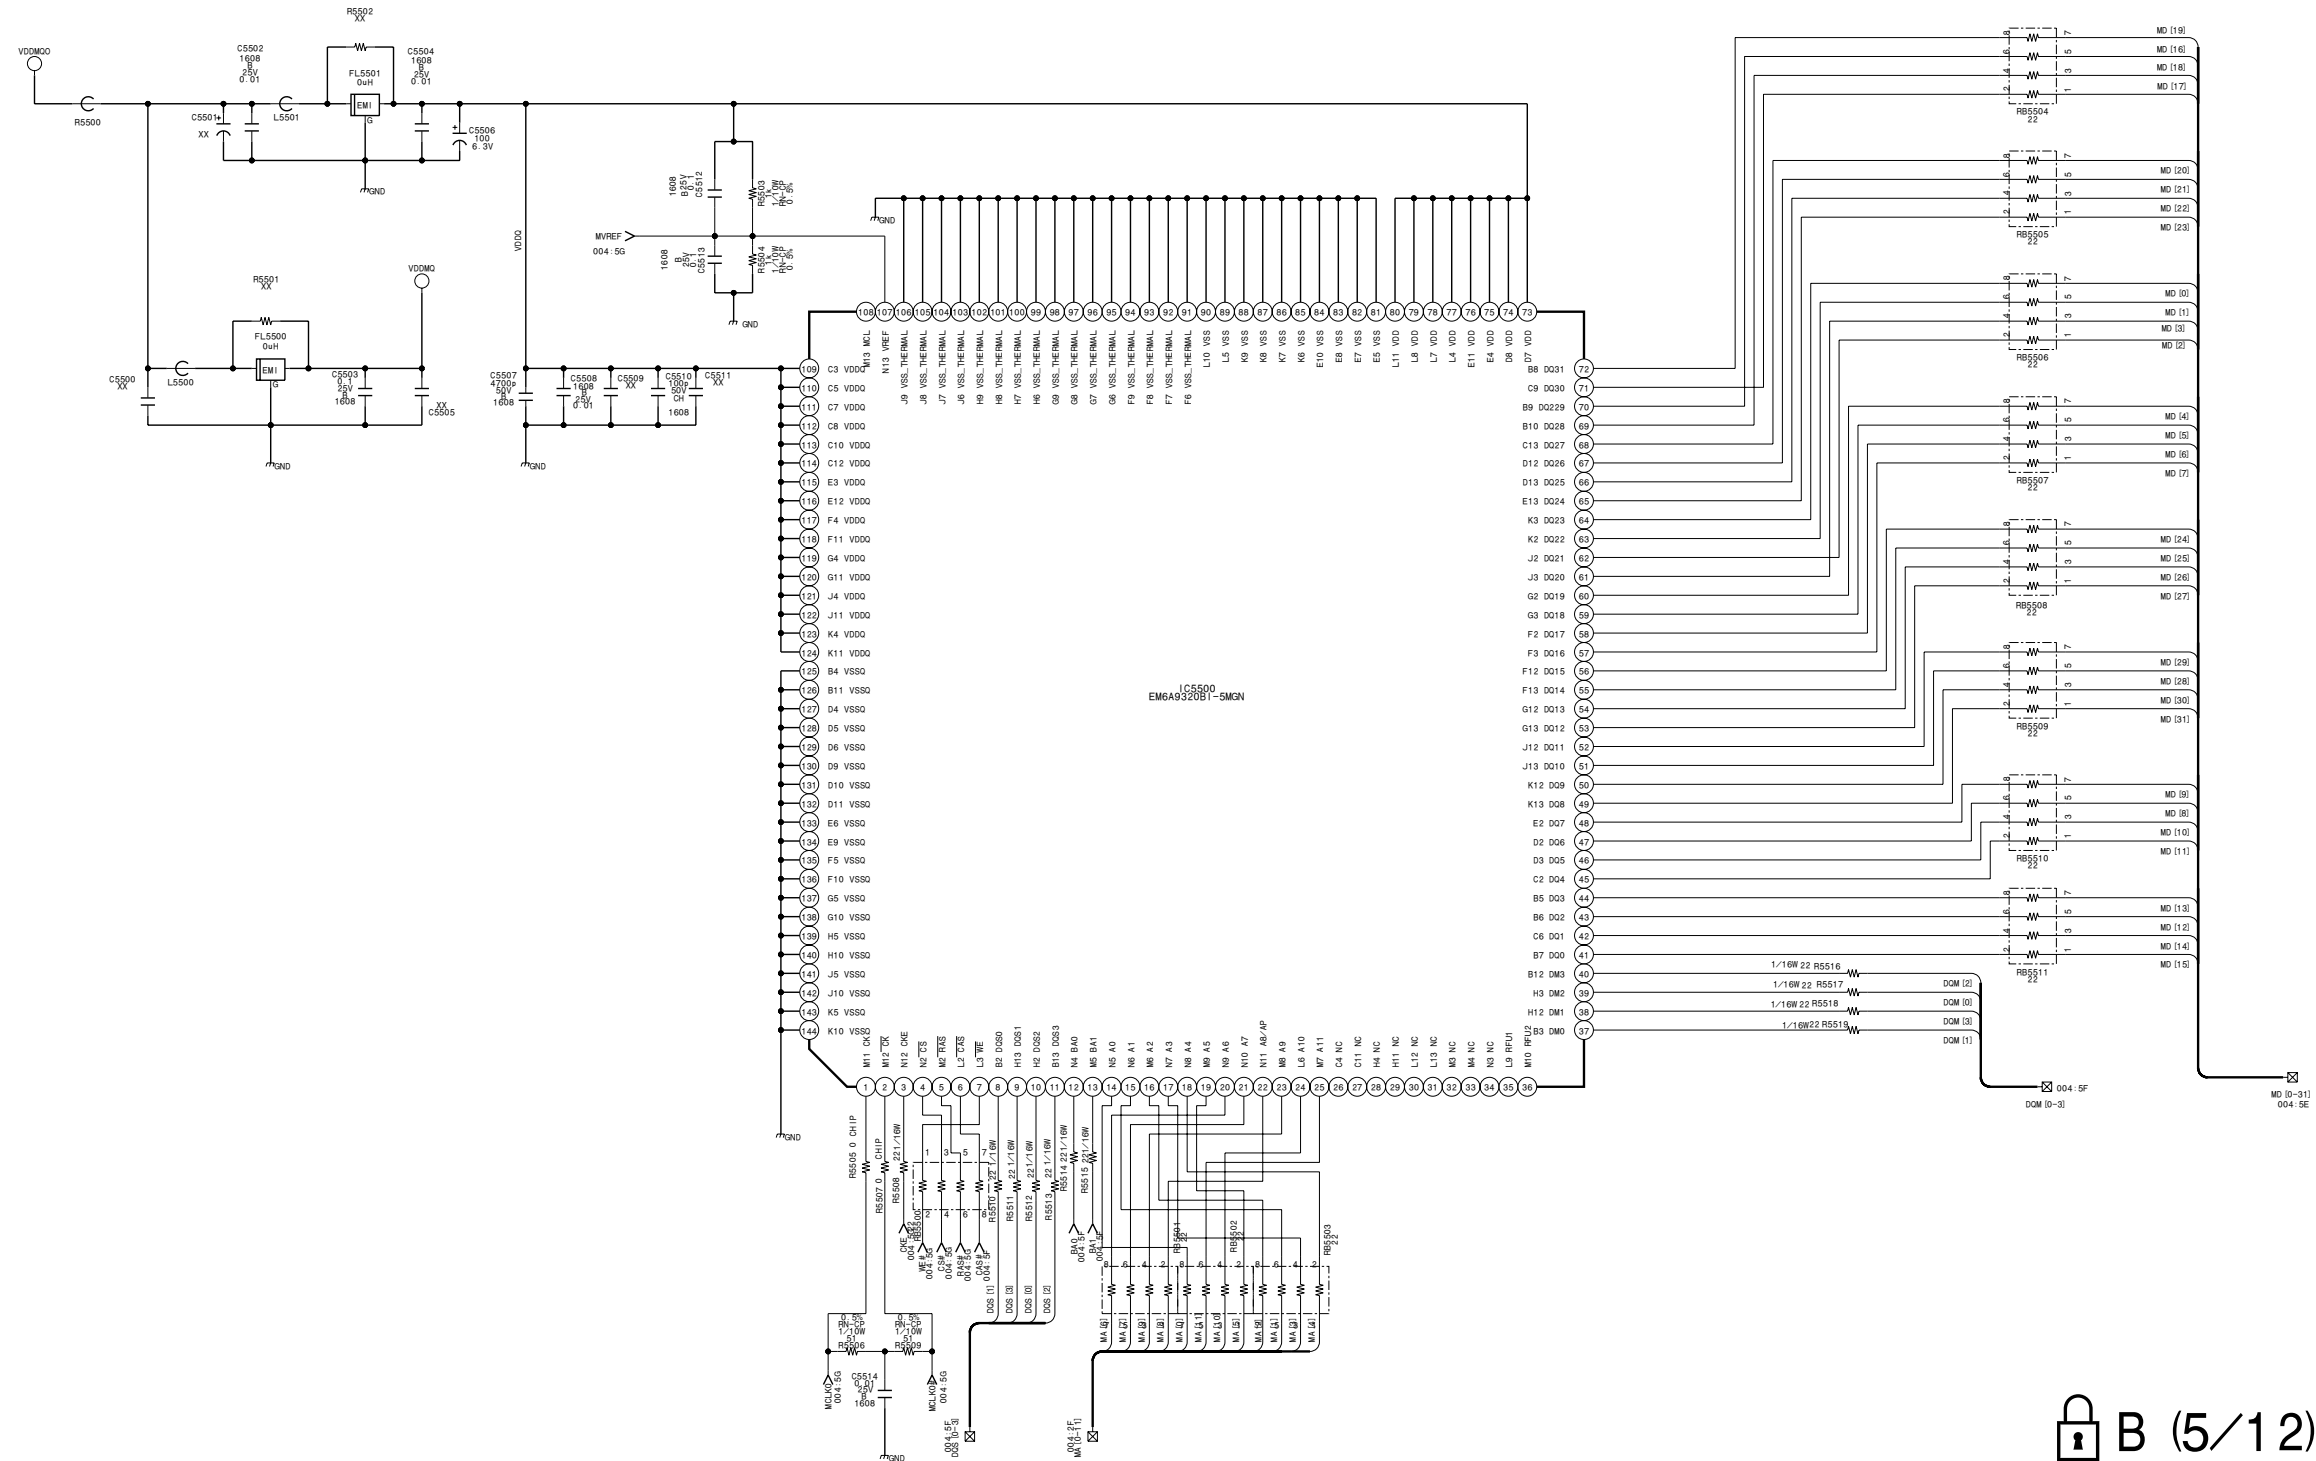

B (5/12)

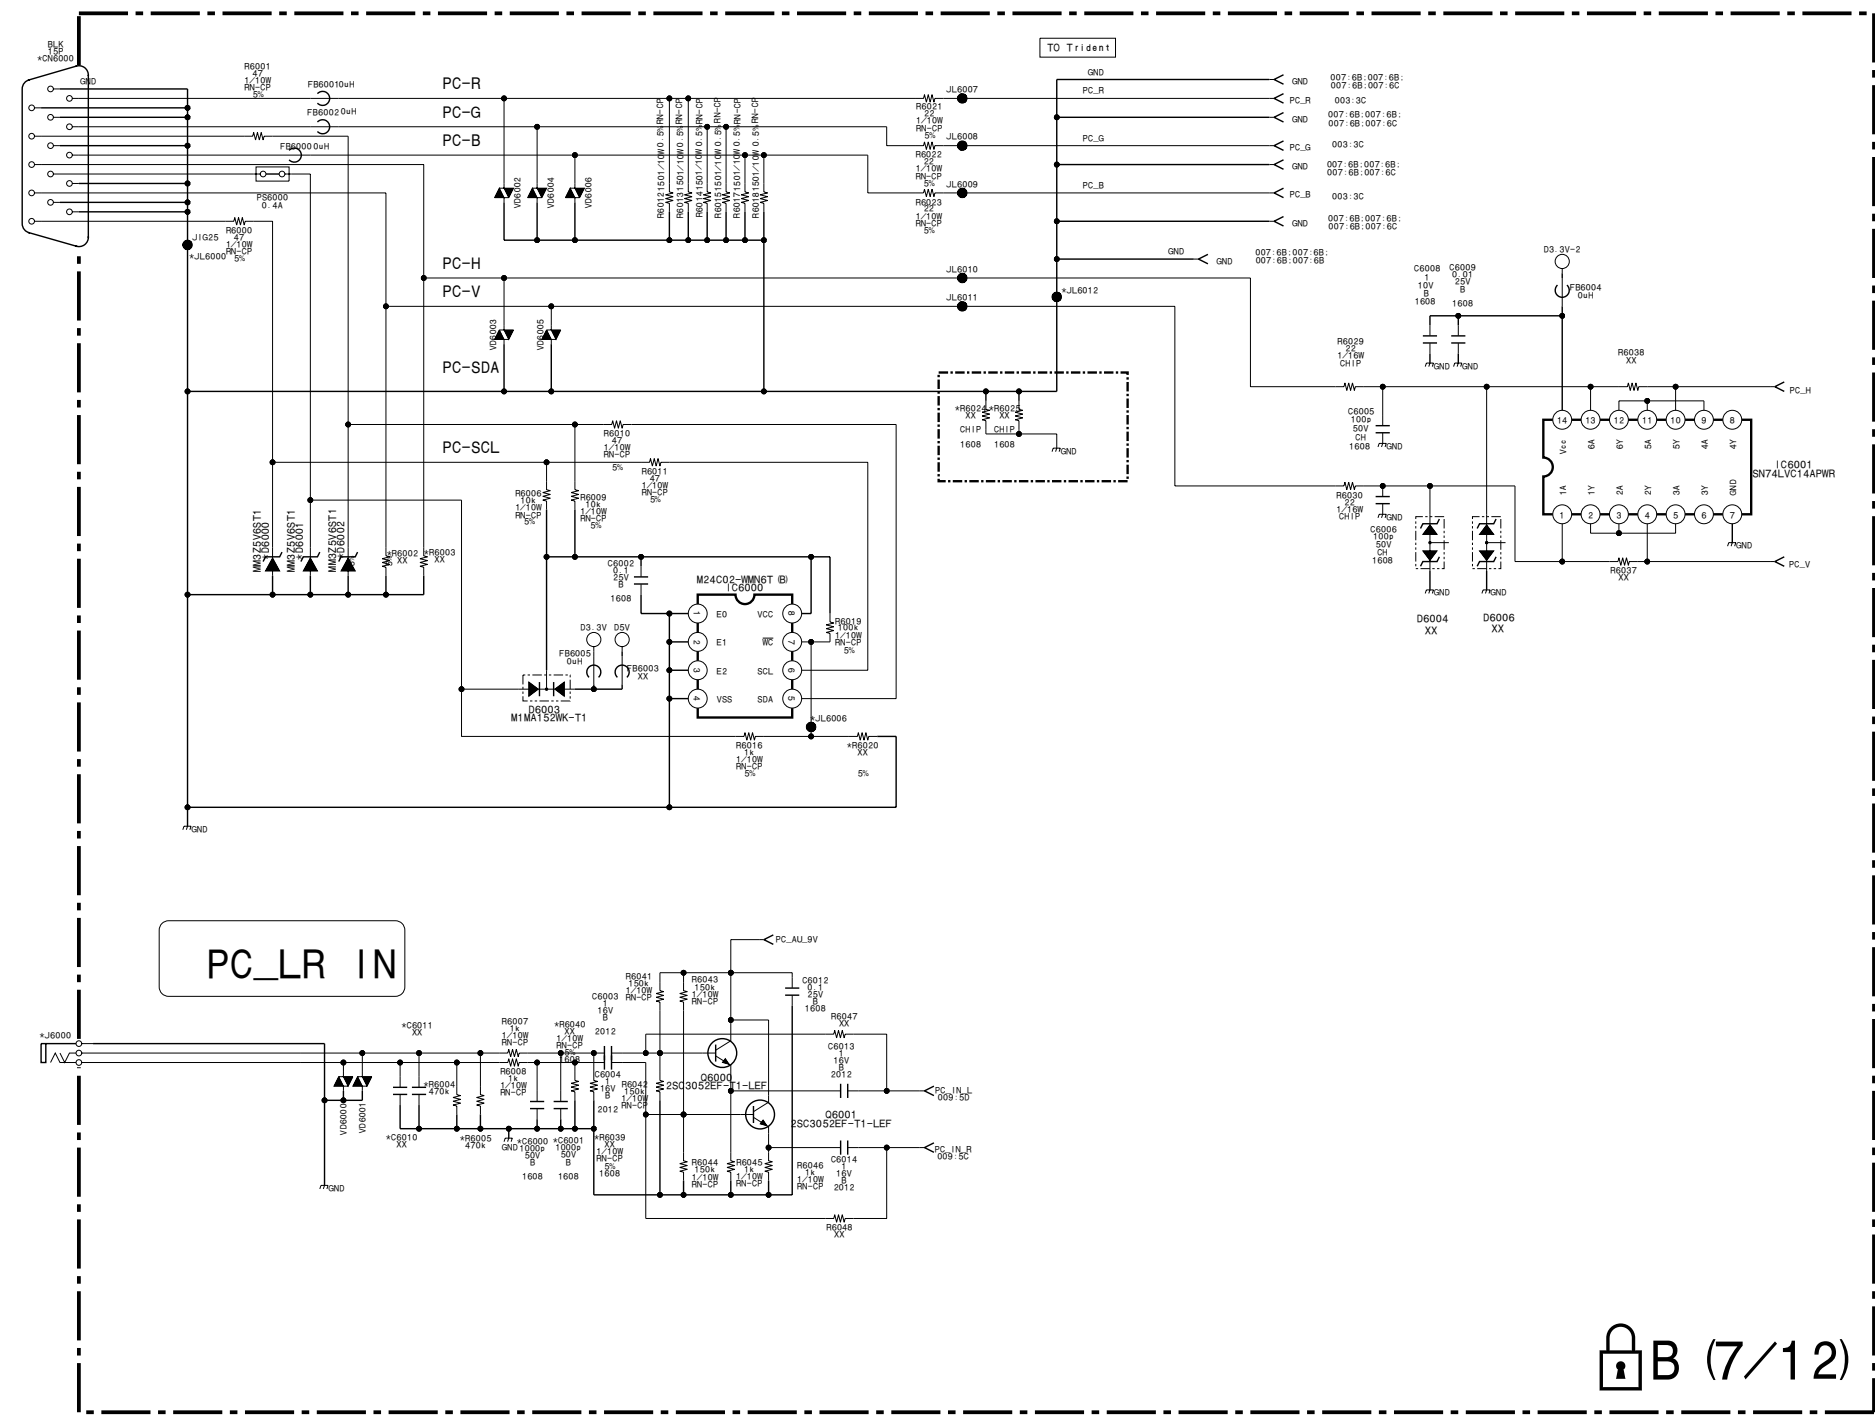

🔒 B (7/12)

A
B
C
D
E
F
G
H

HDMI INPUT_1

AUDIO IN

TO AUDIO


TO µCON


TO SVP-PX (HDMI)

EDID

HDMI_D/A


🔒 B (8/12)

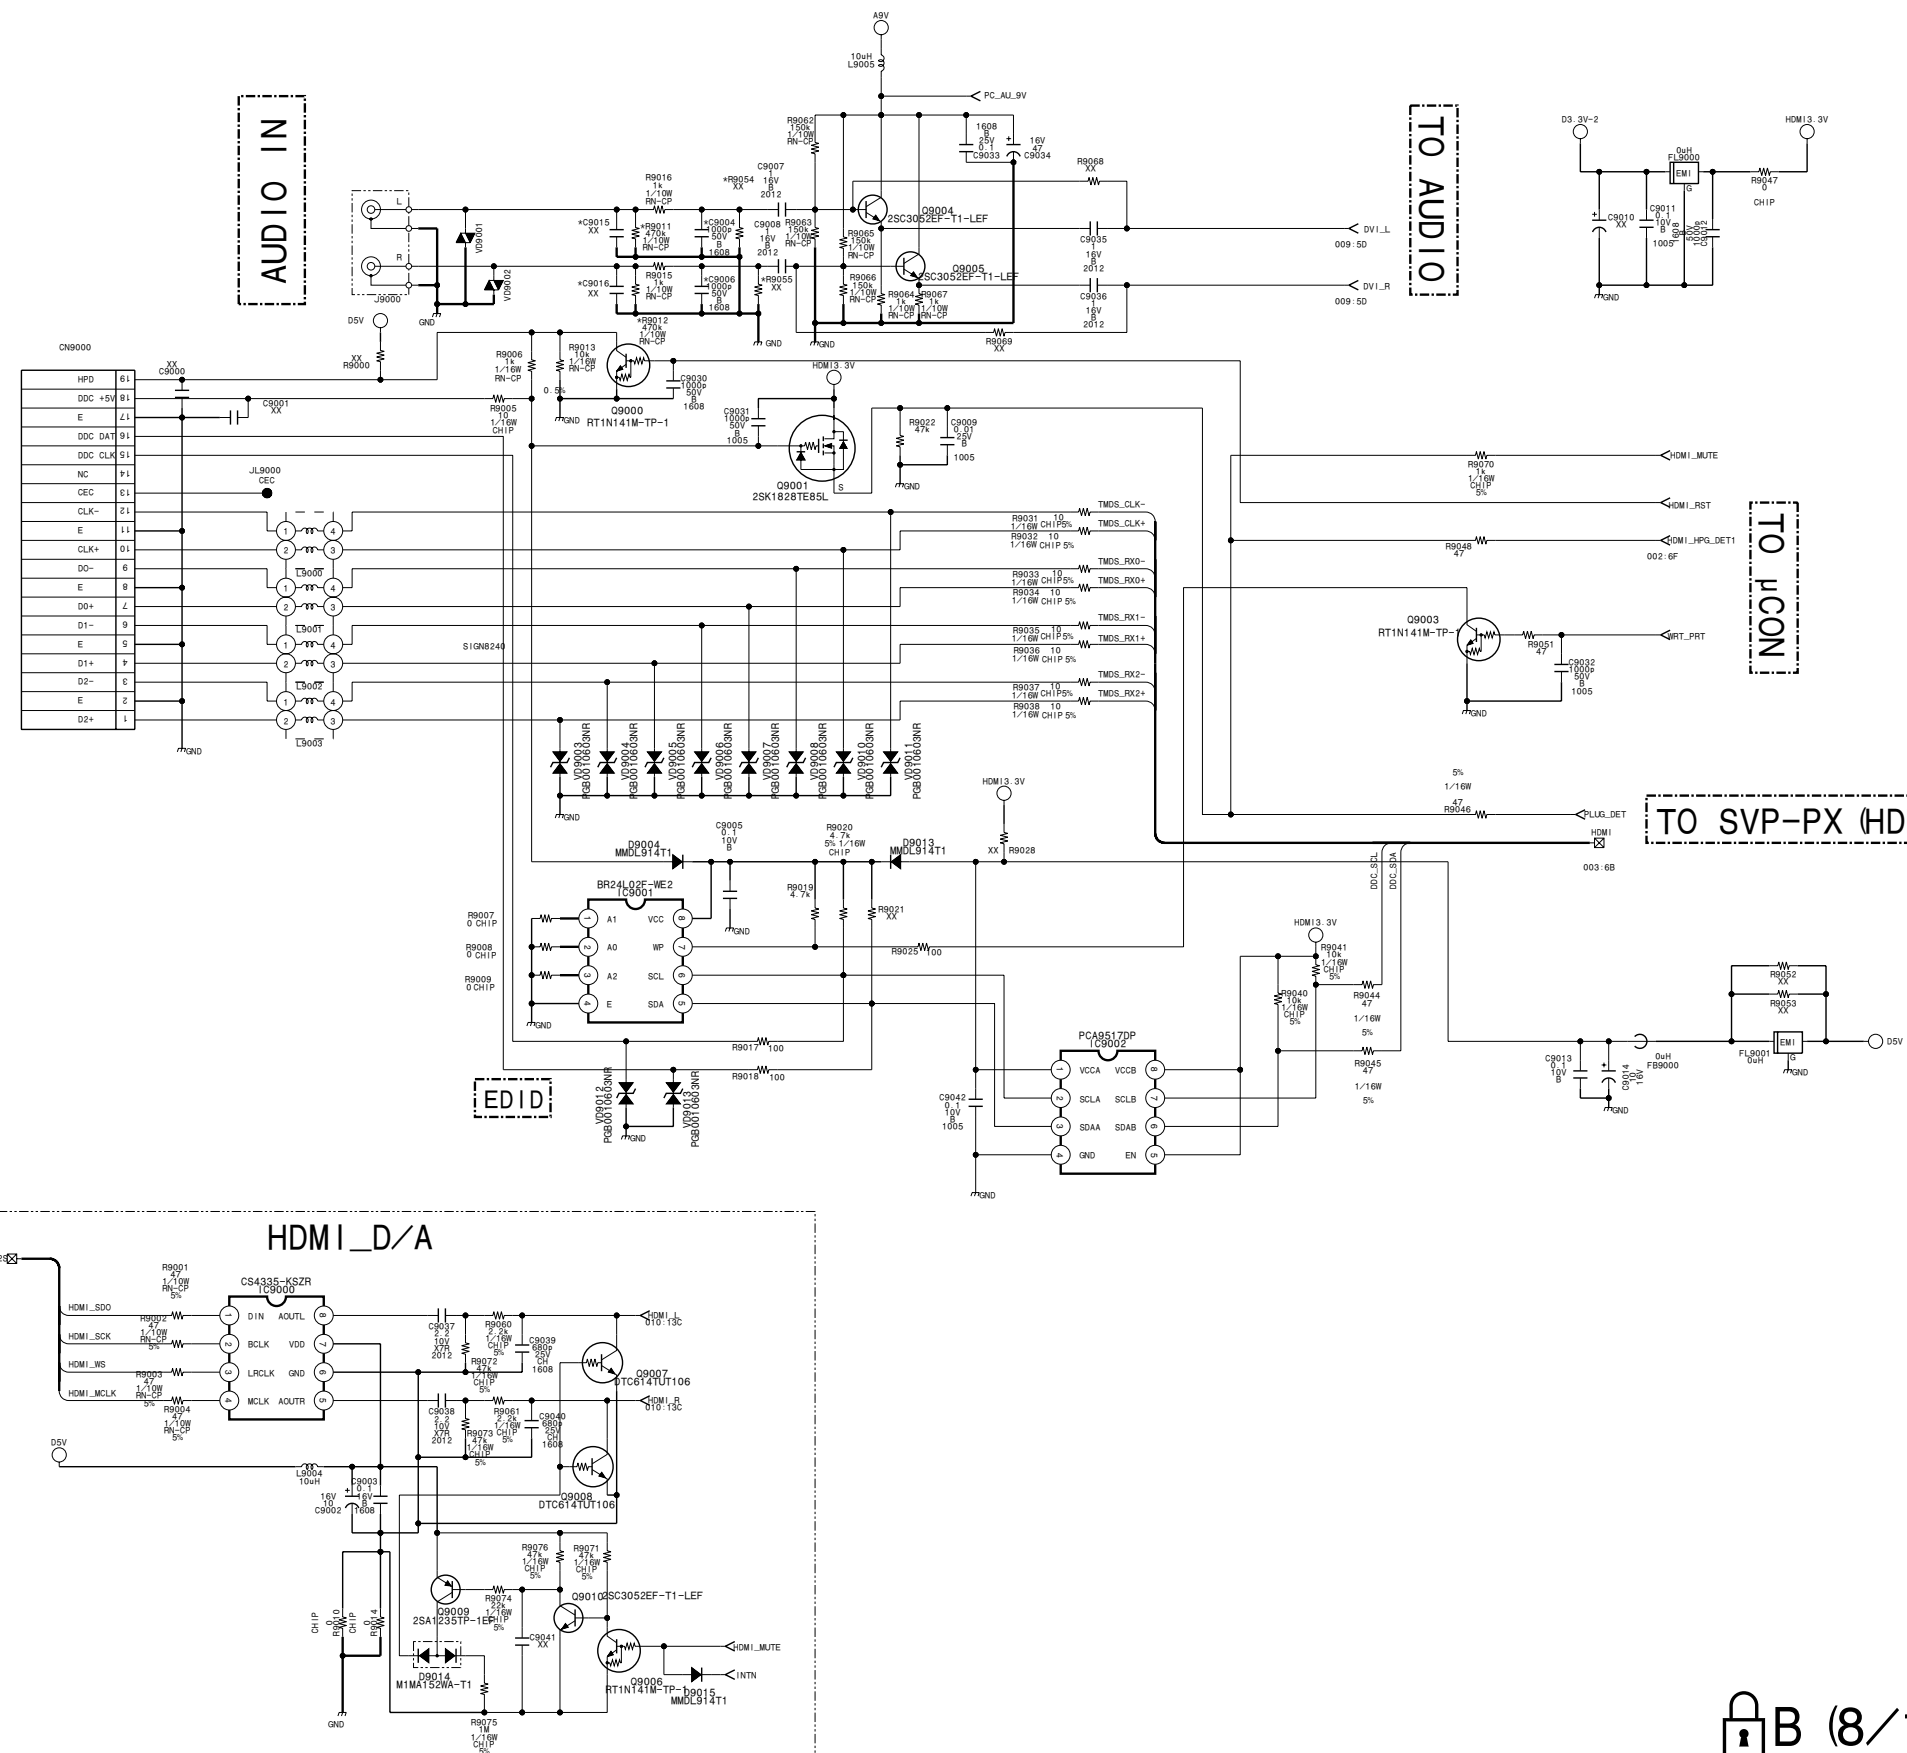

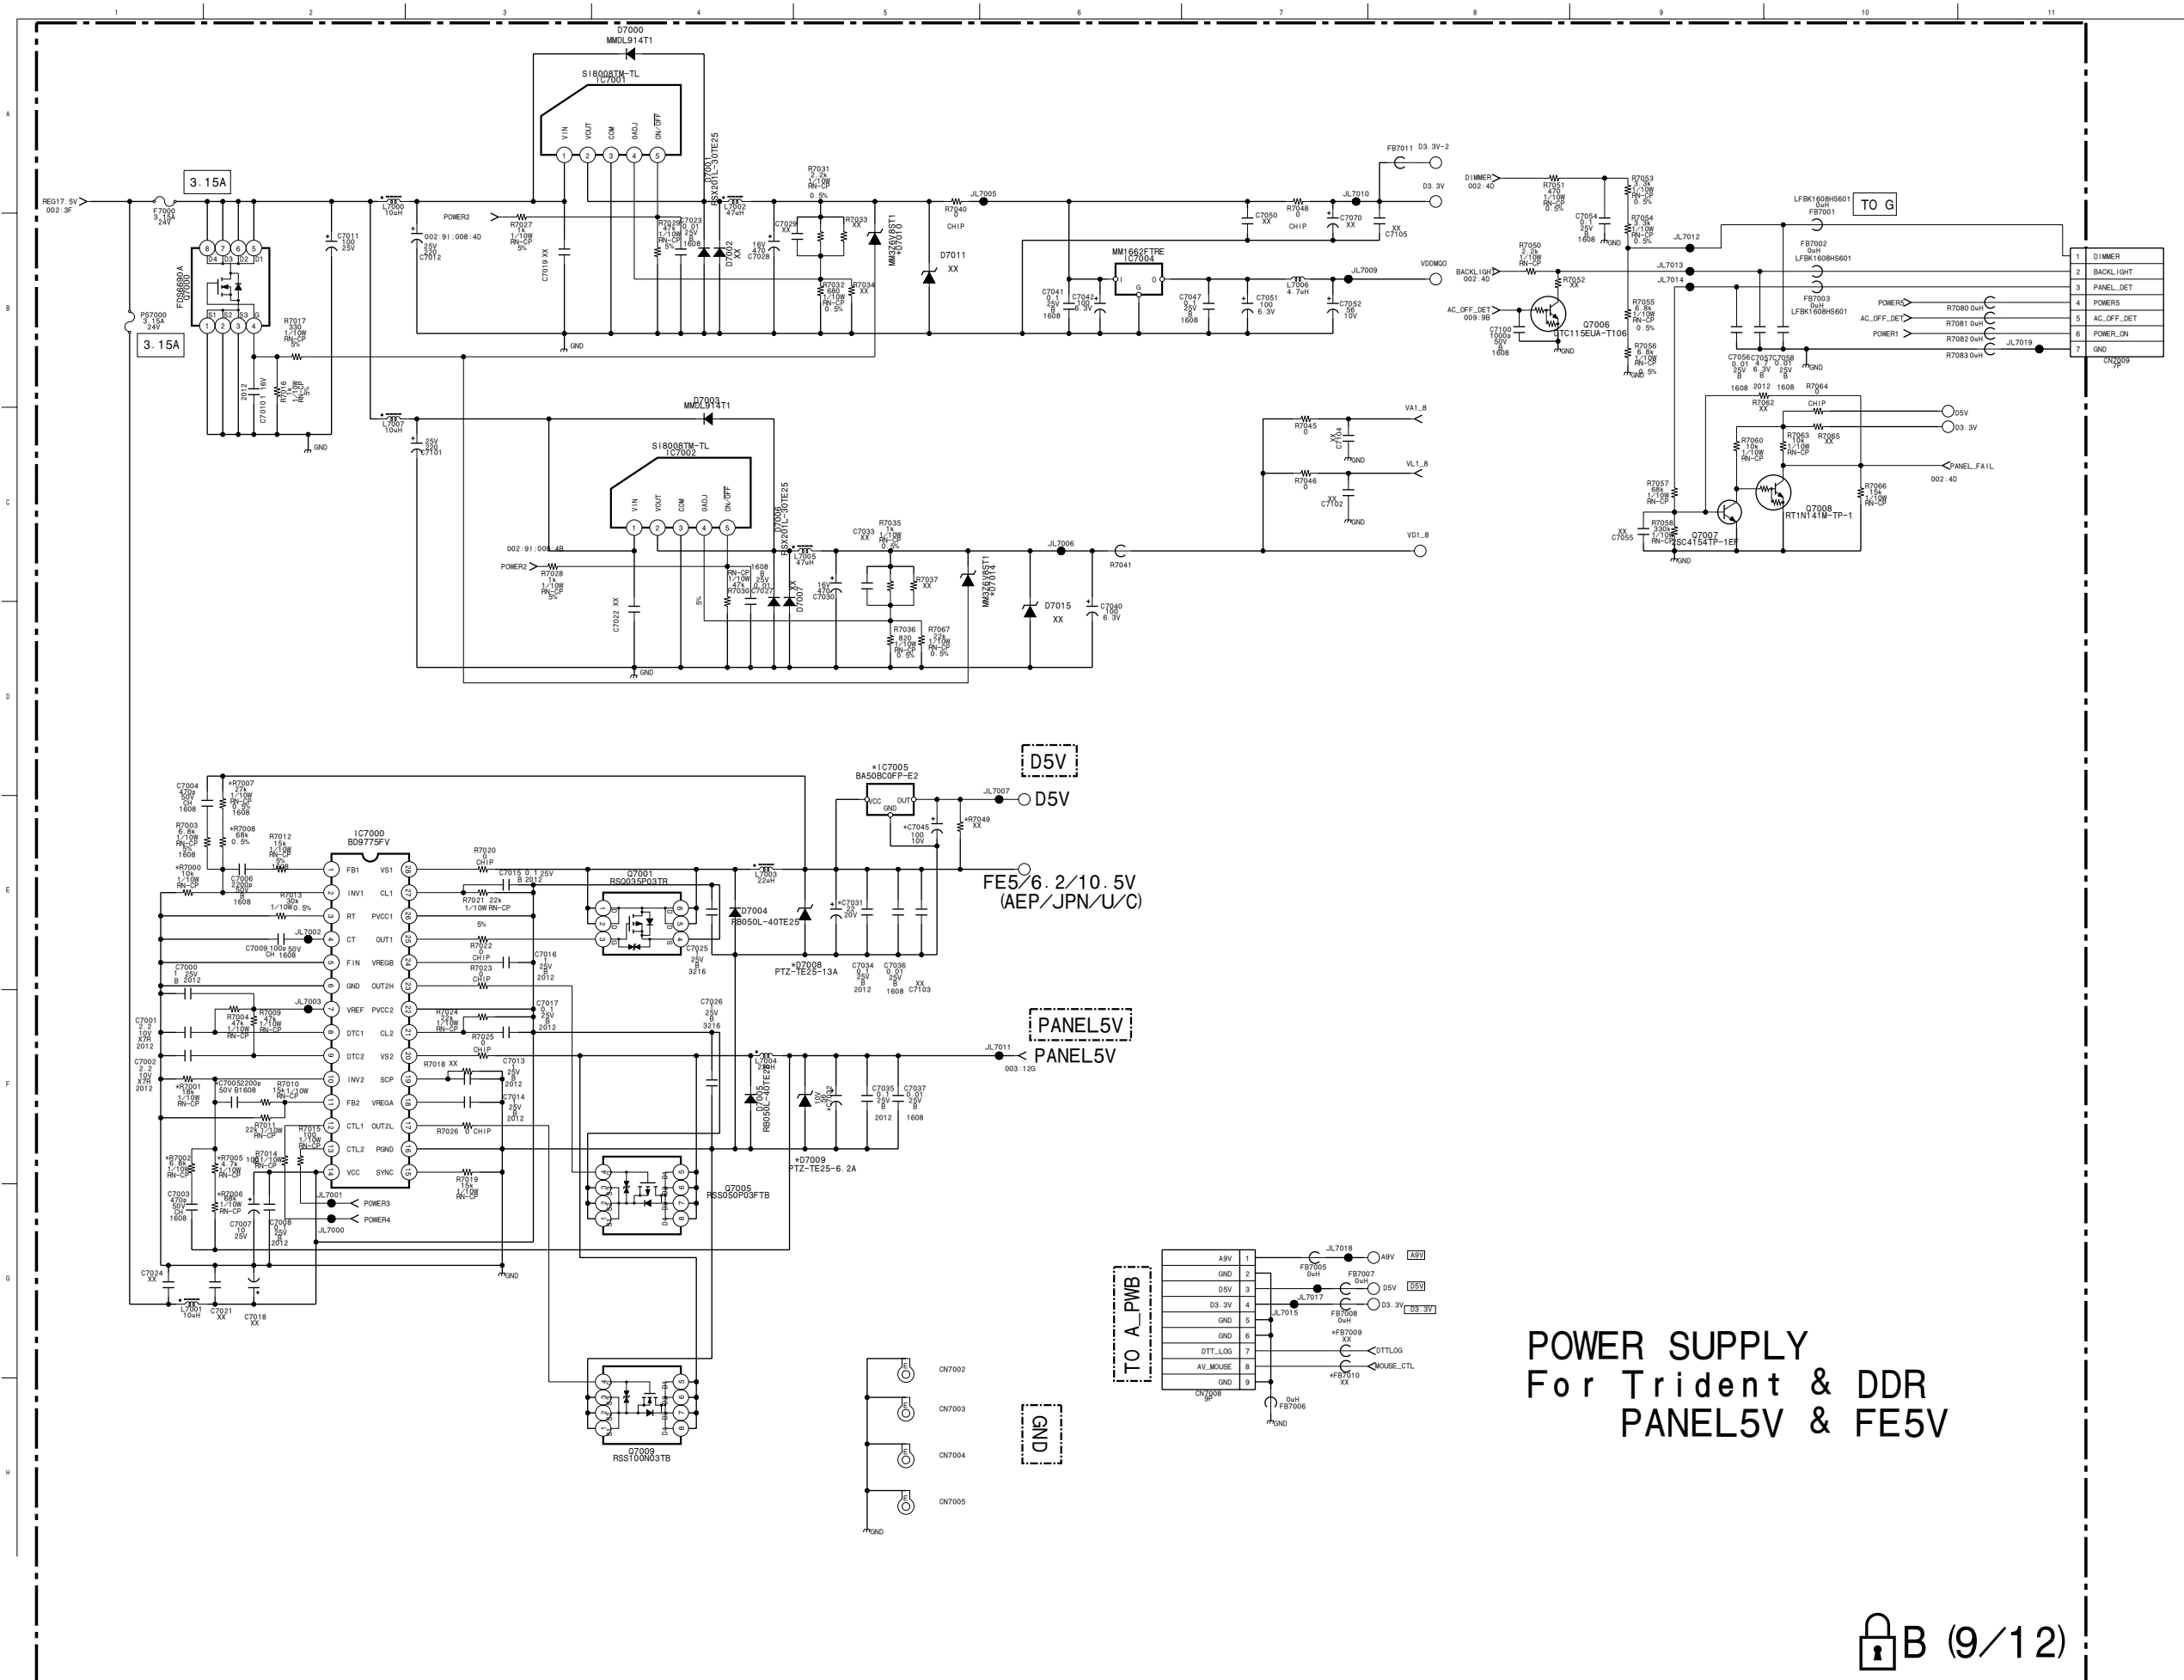


POWER SUPPLY
For Trident & DDR
PANEL5V & FE5V

B (9/12)

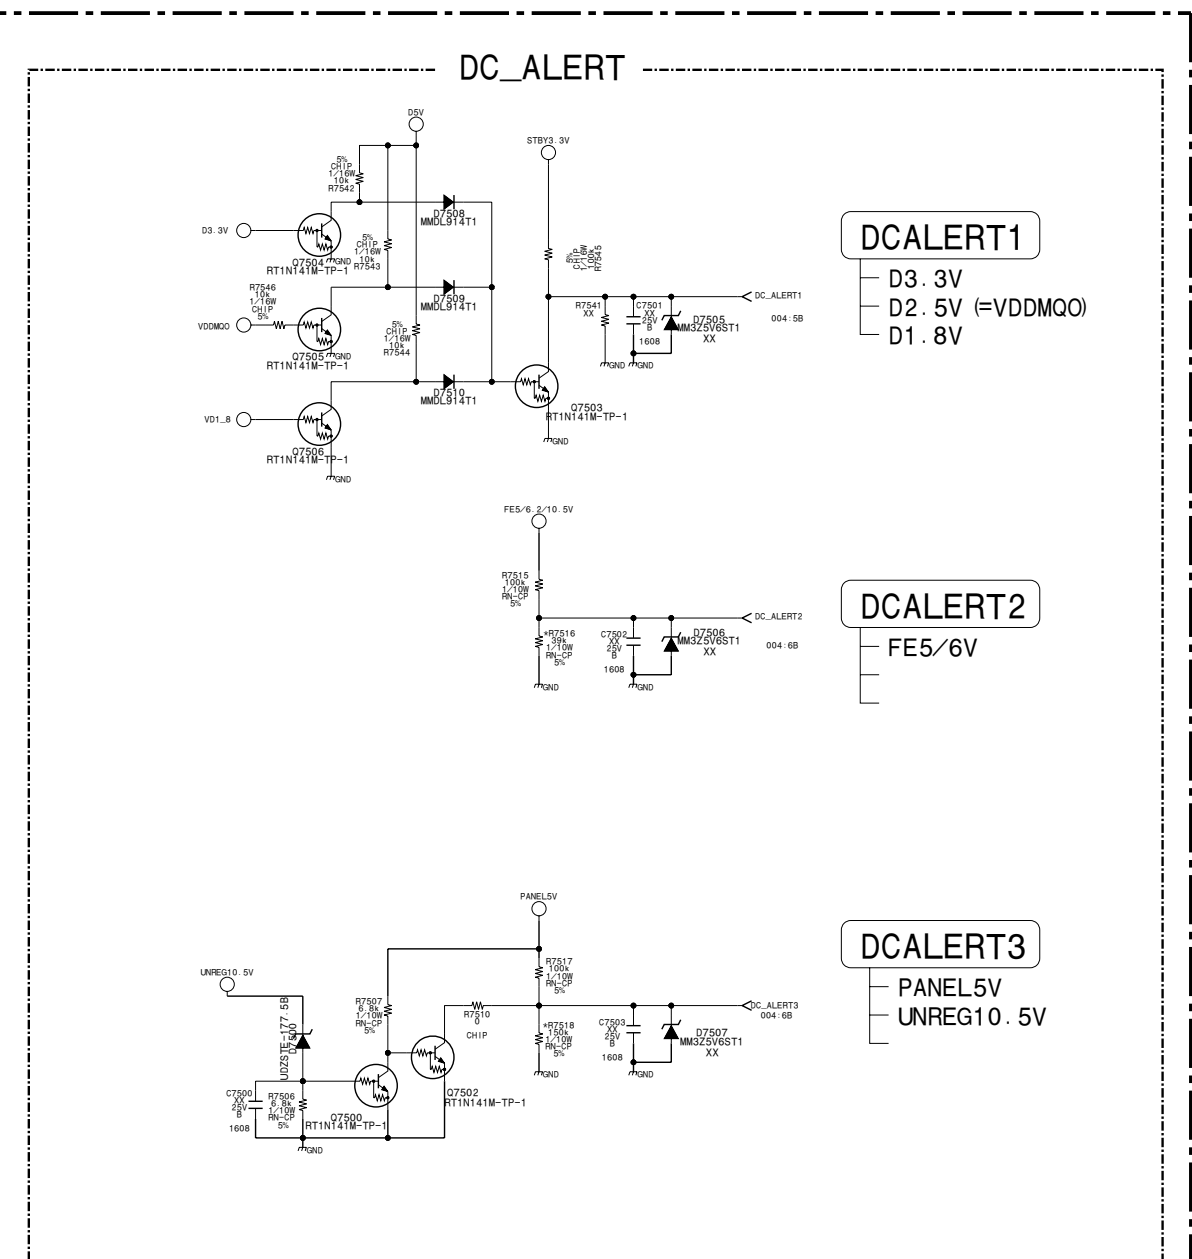


B (10/12)

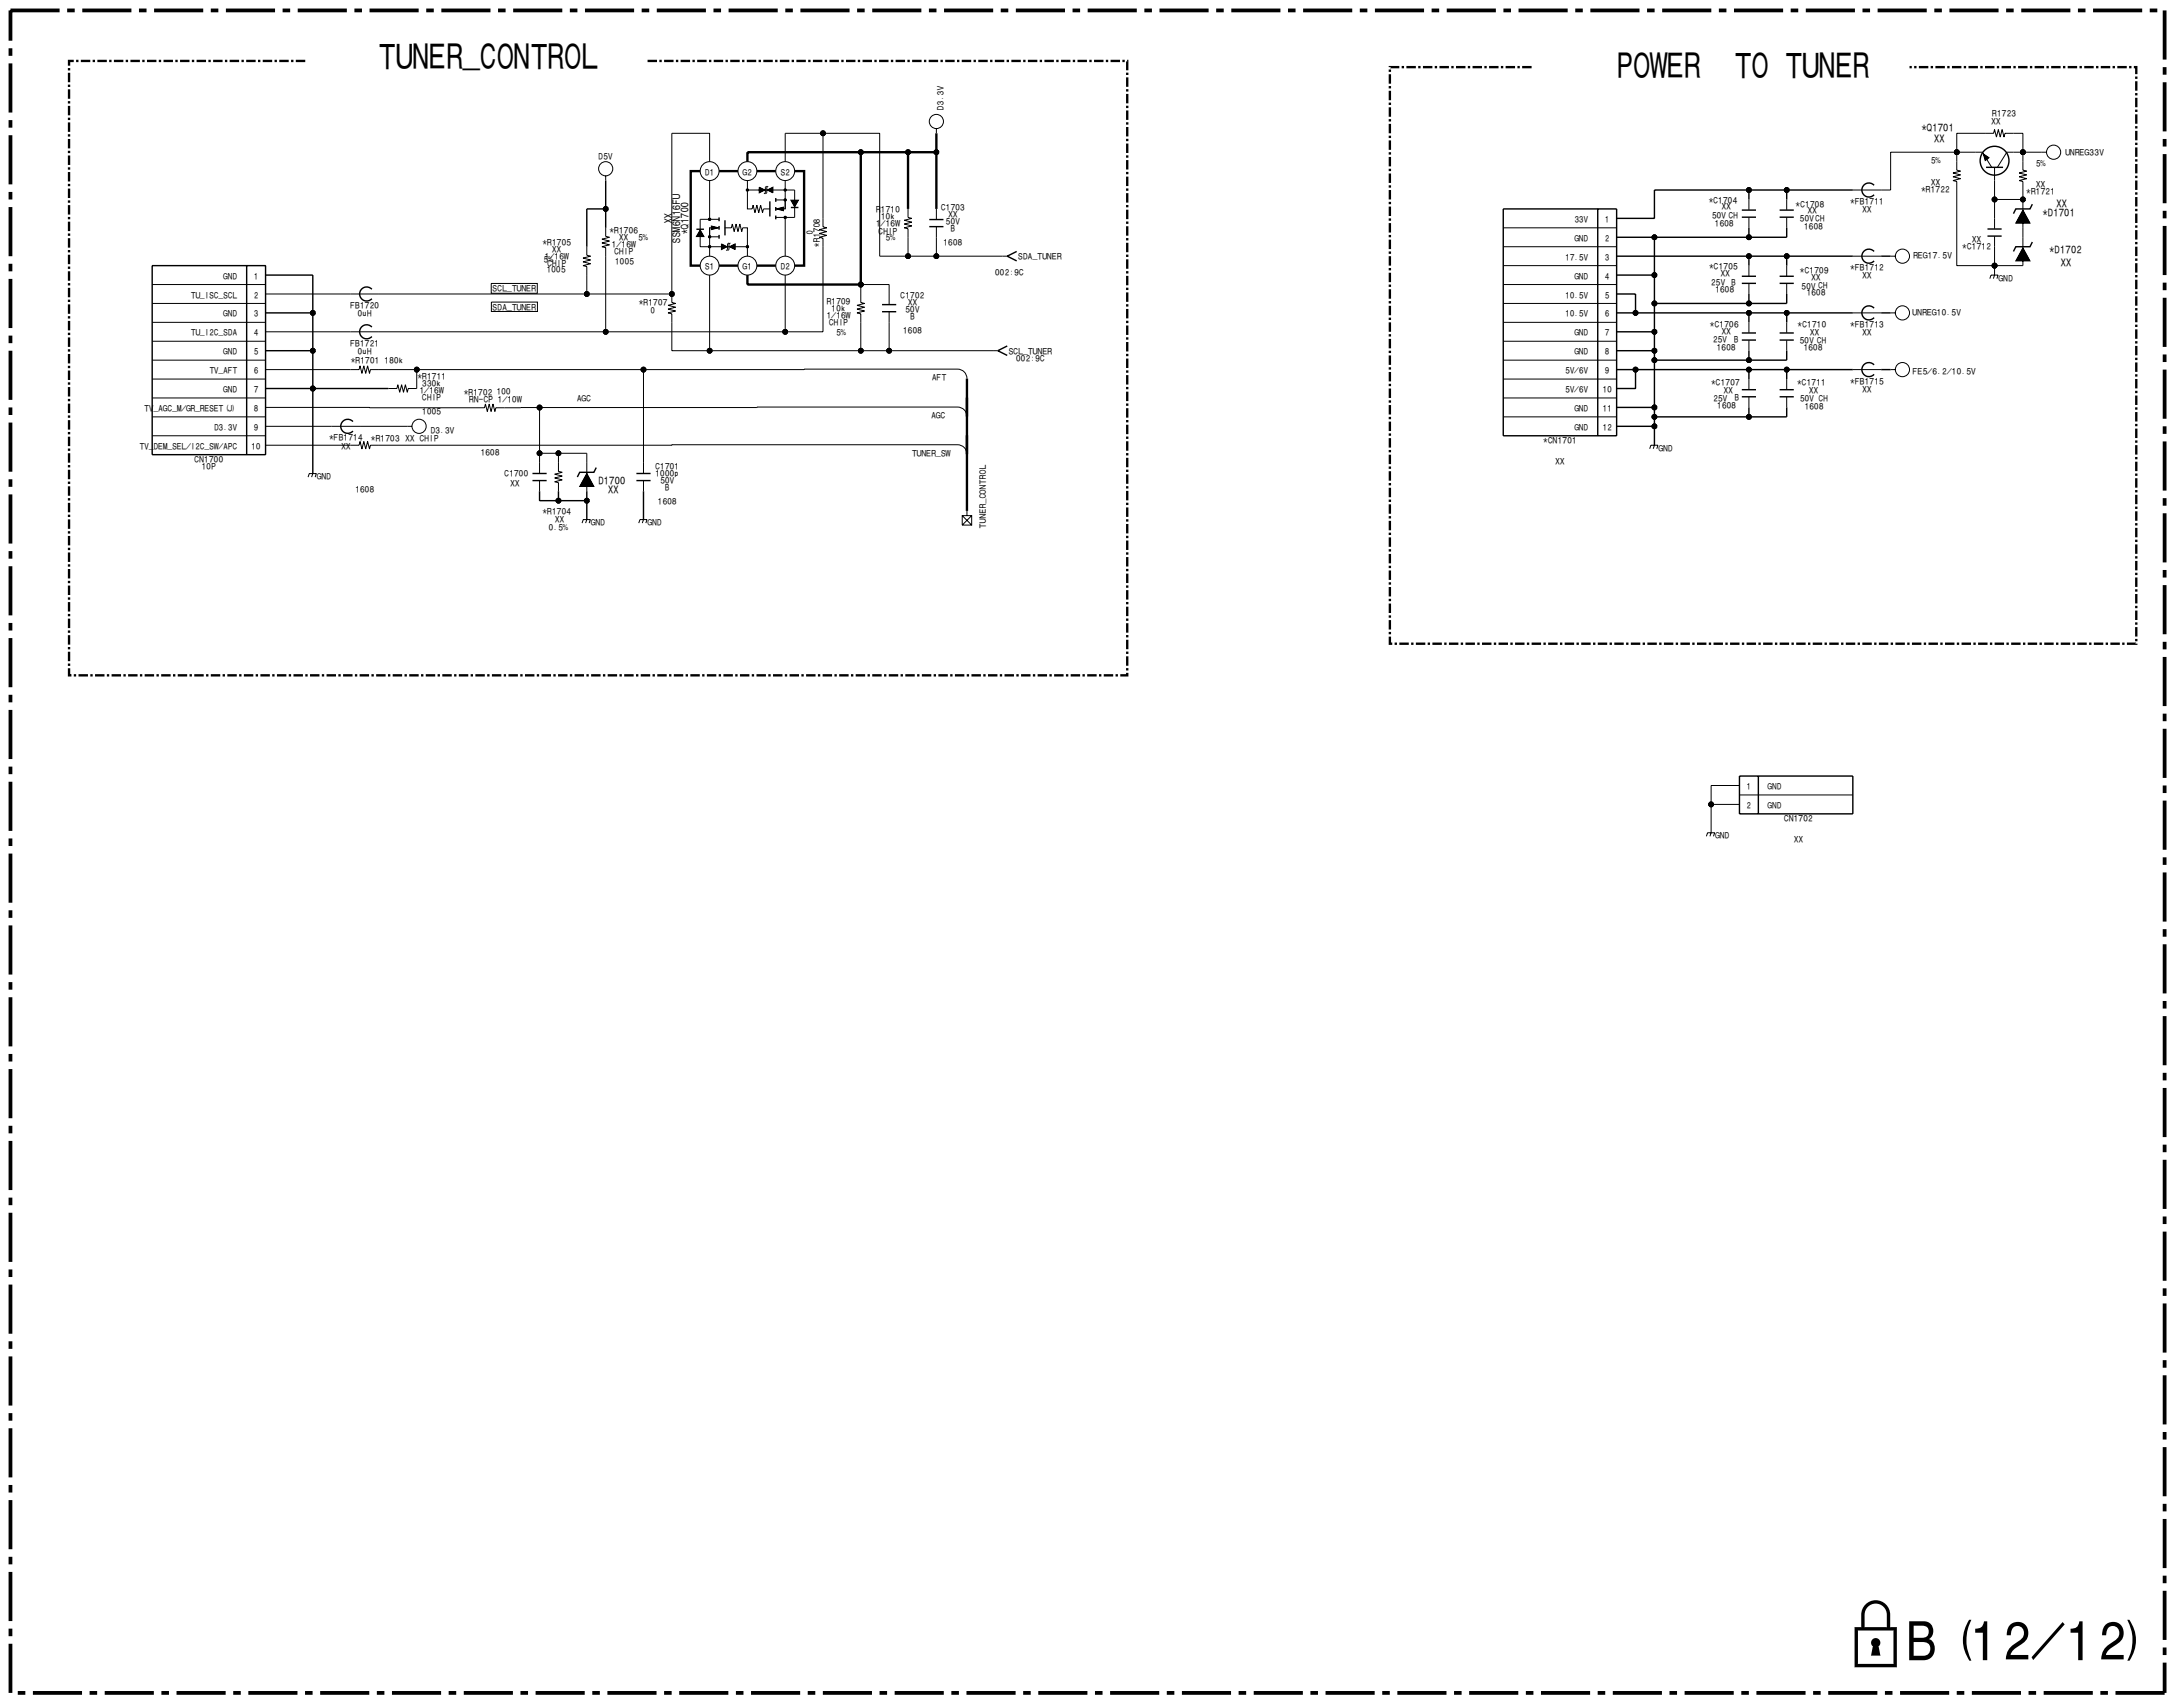


🔒 B (12/12)

(3) G1 Board (KDL-32V2000)


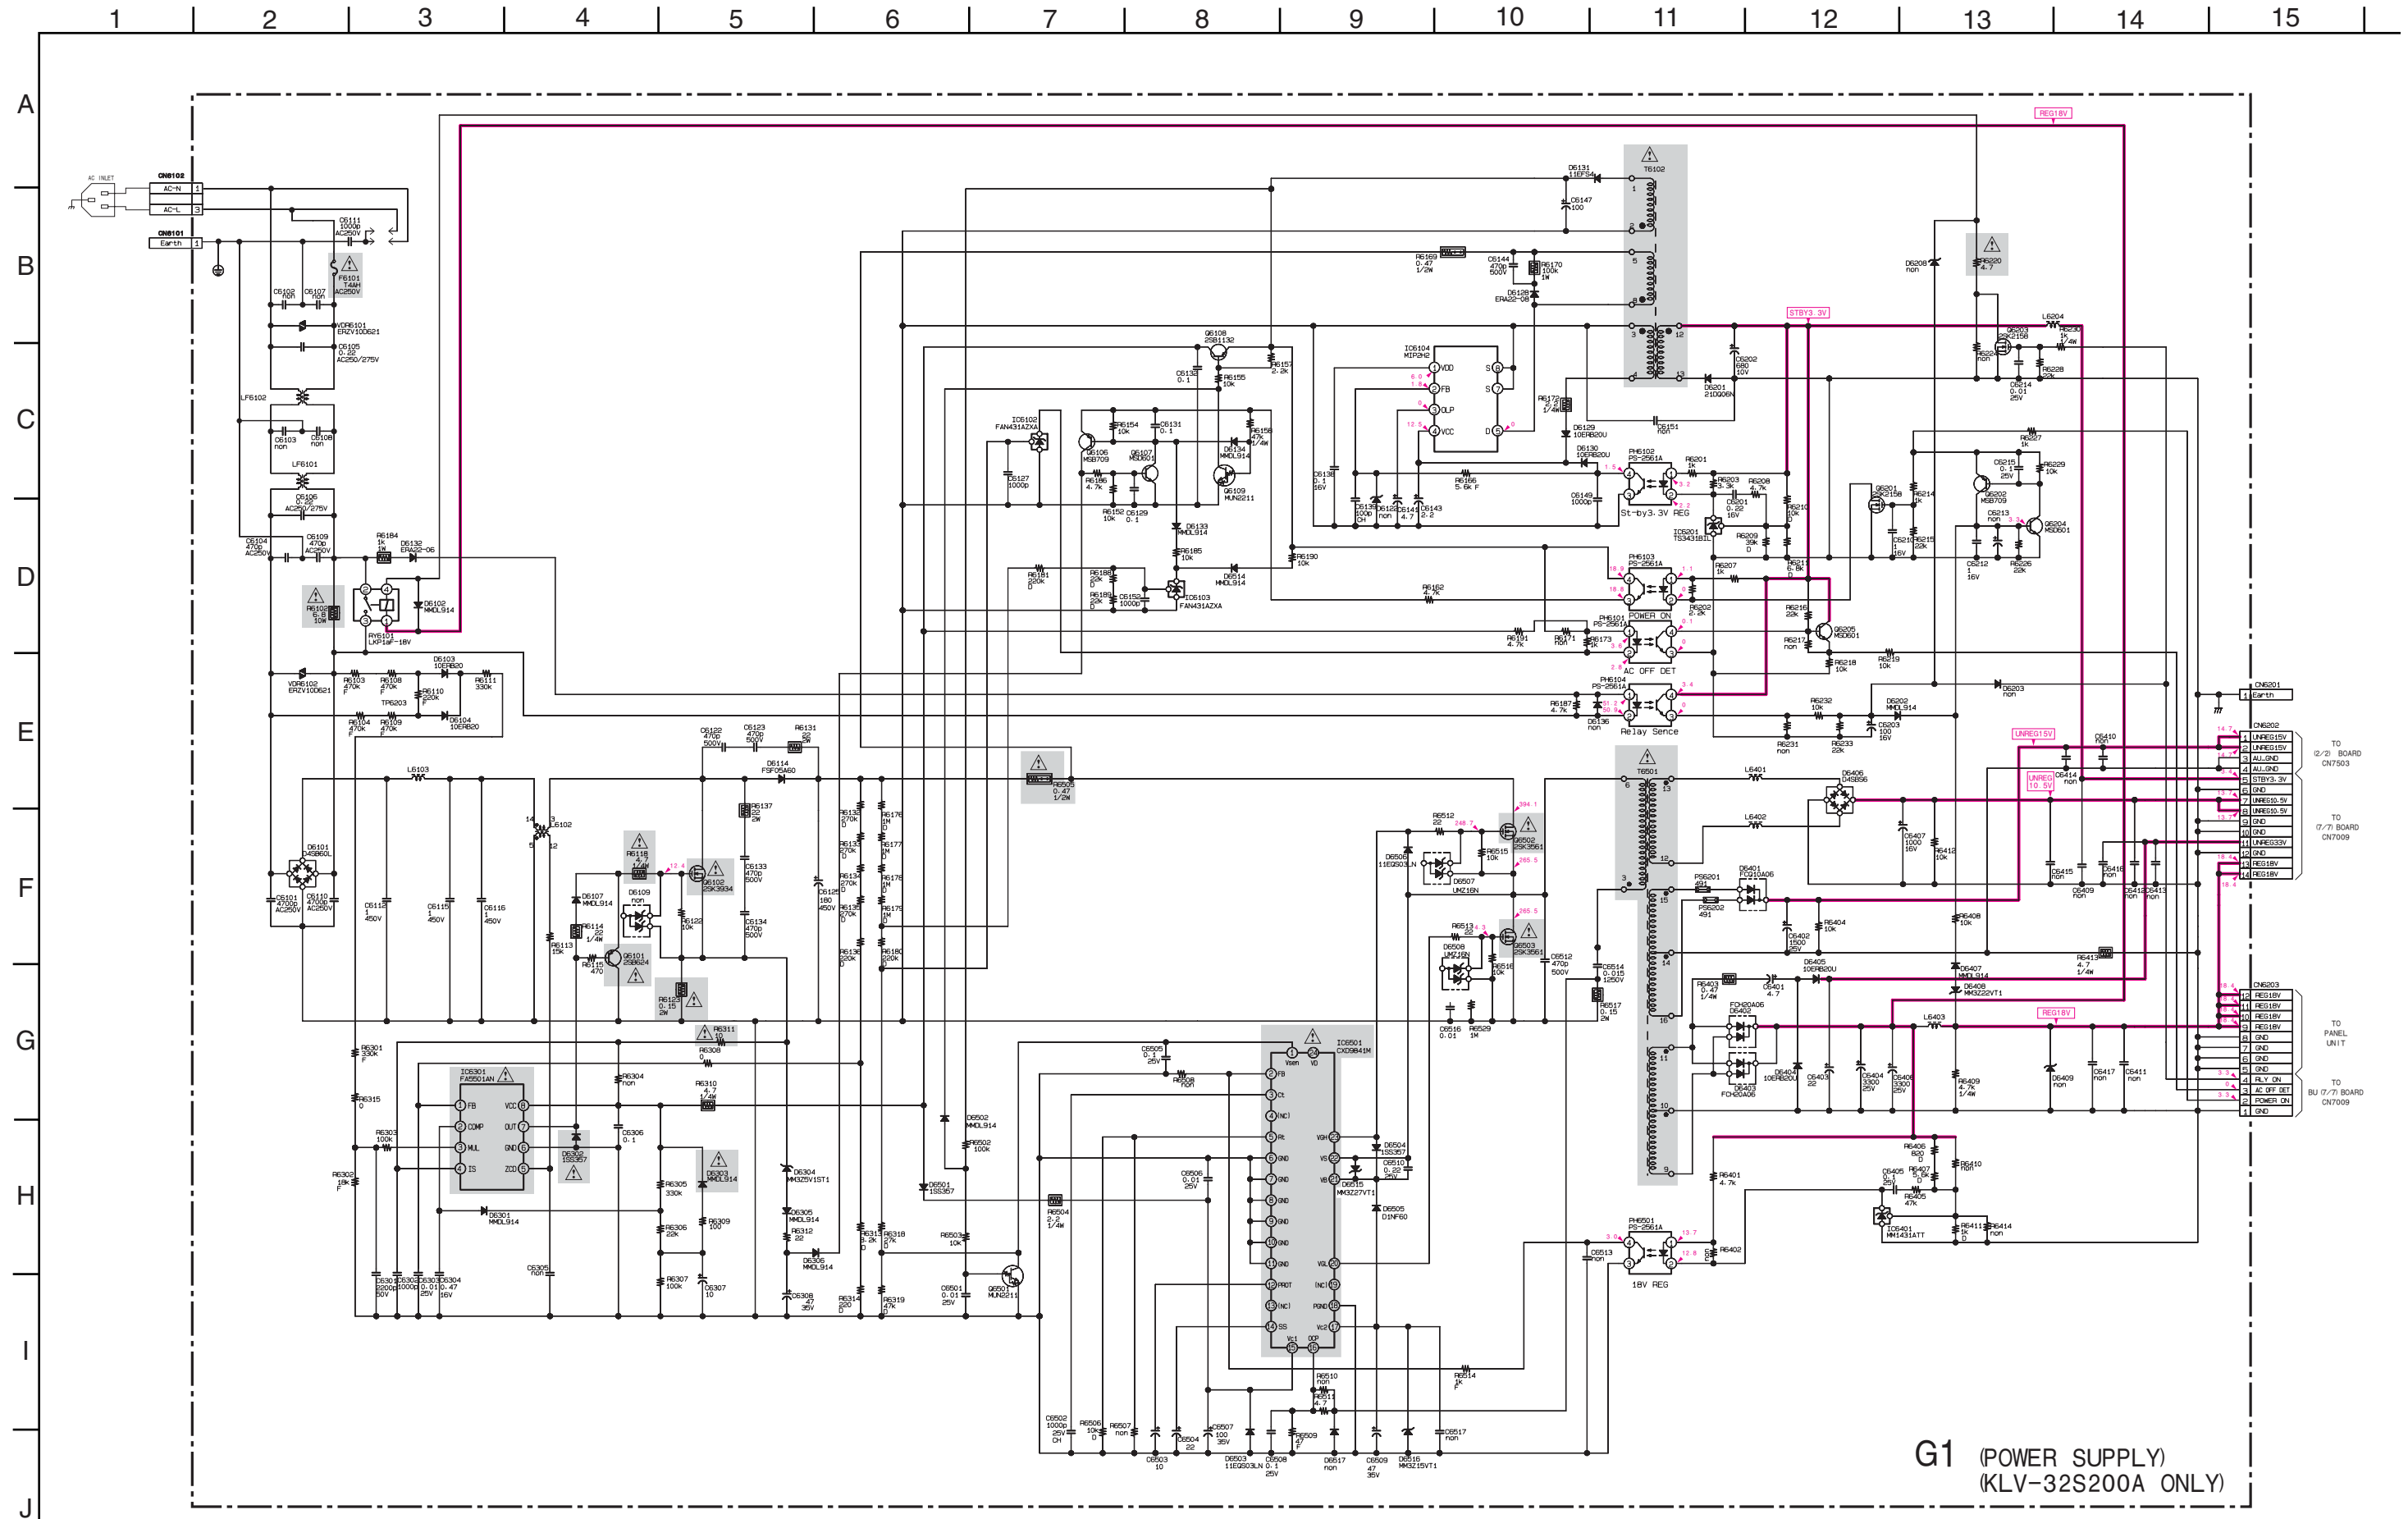


(4) G2A Board (KDL-40/46V2000)

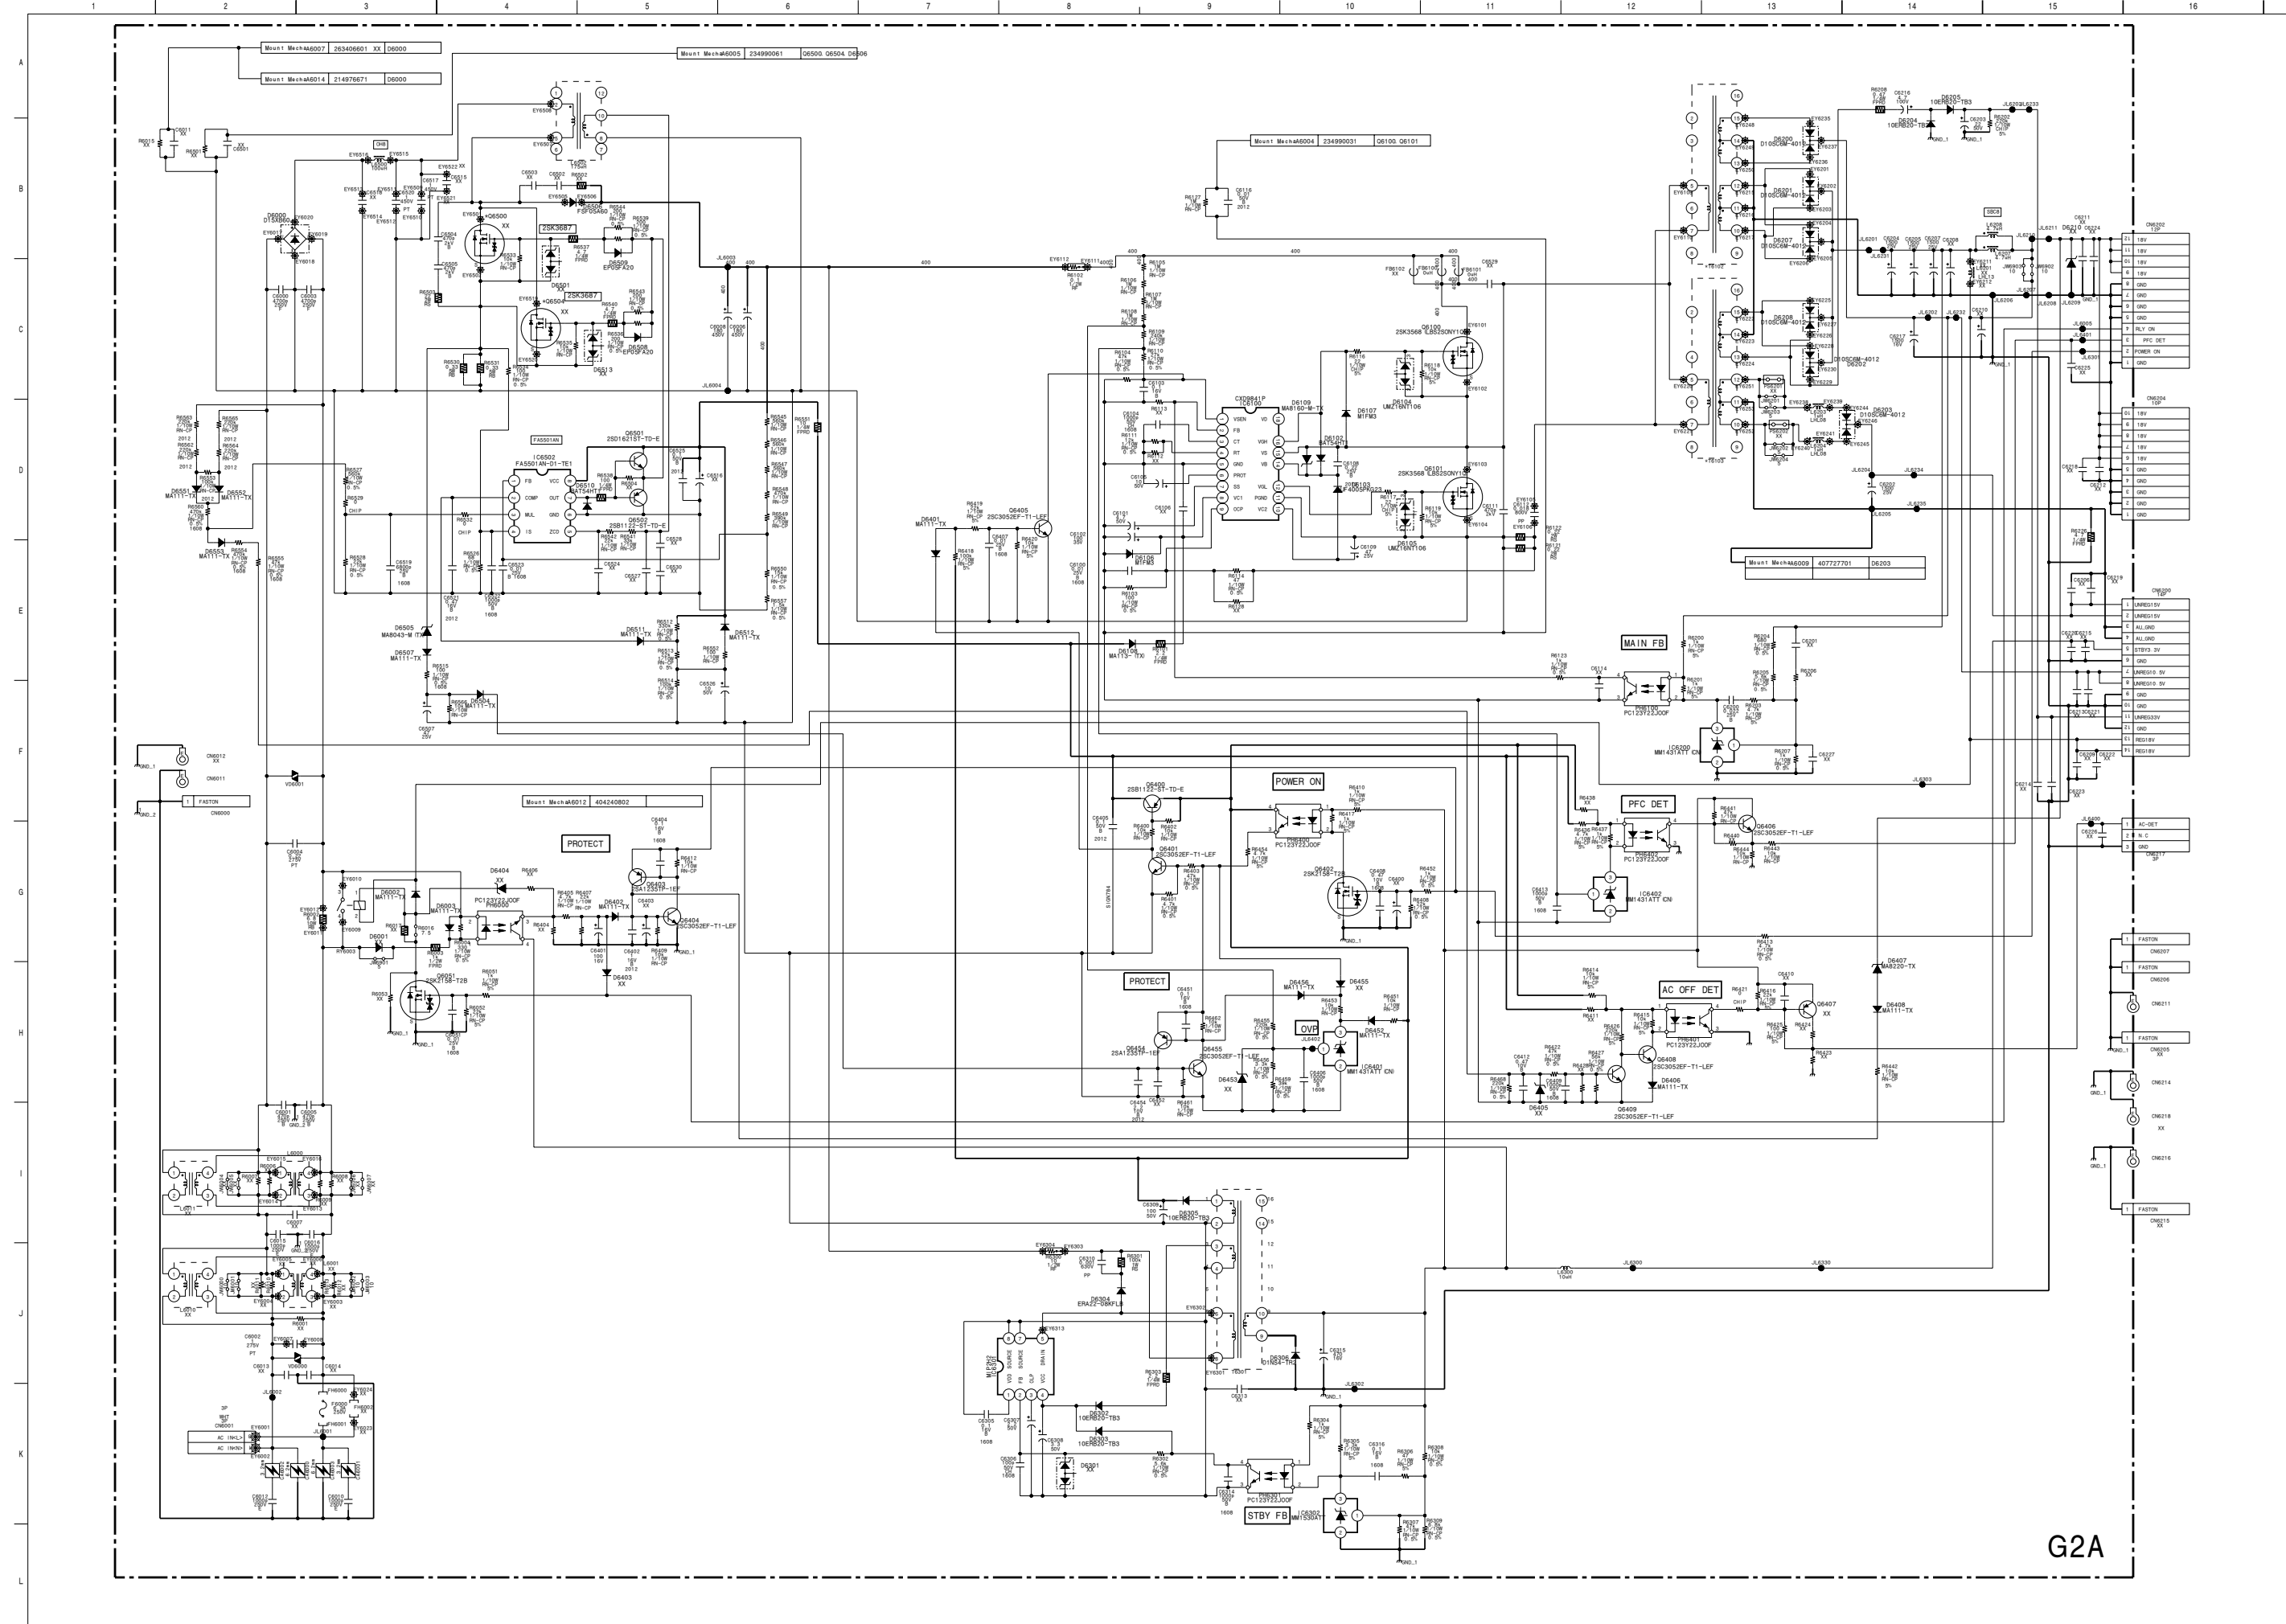

G2A


(5) H1 and H4 Boards

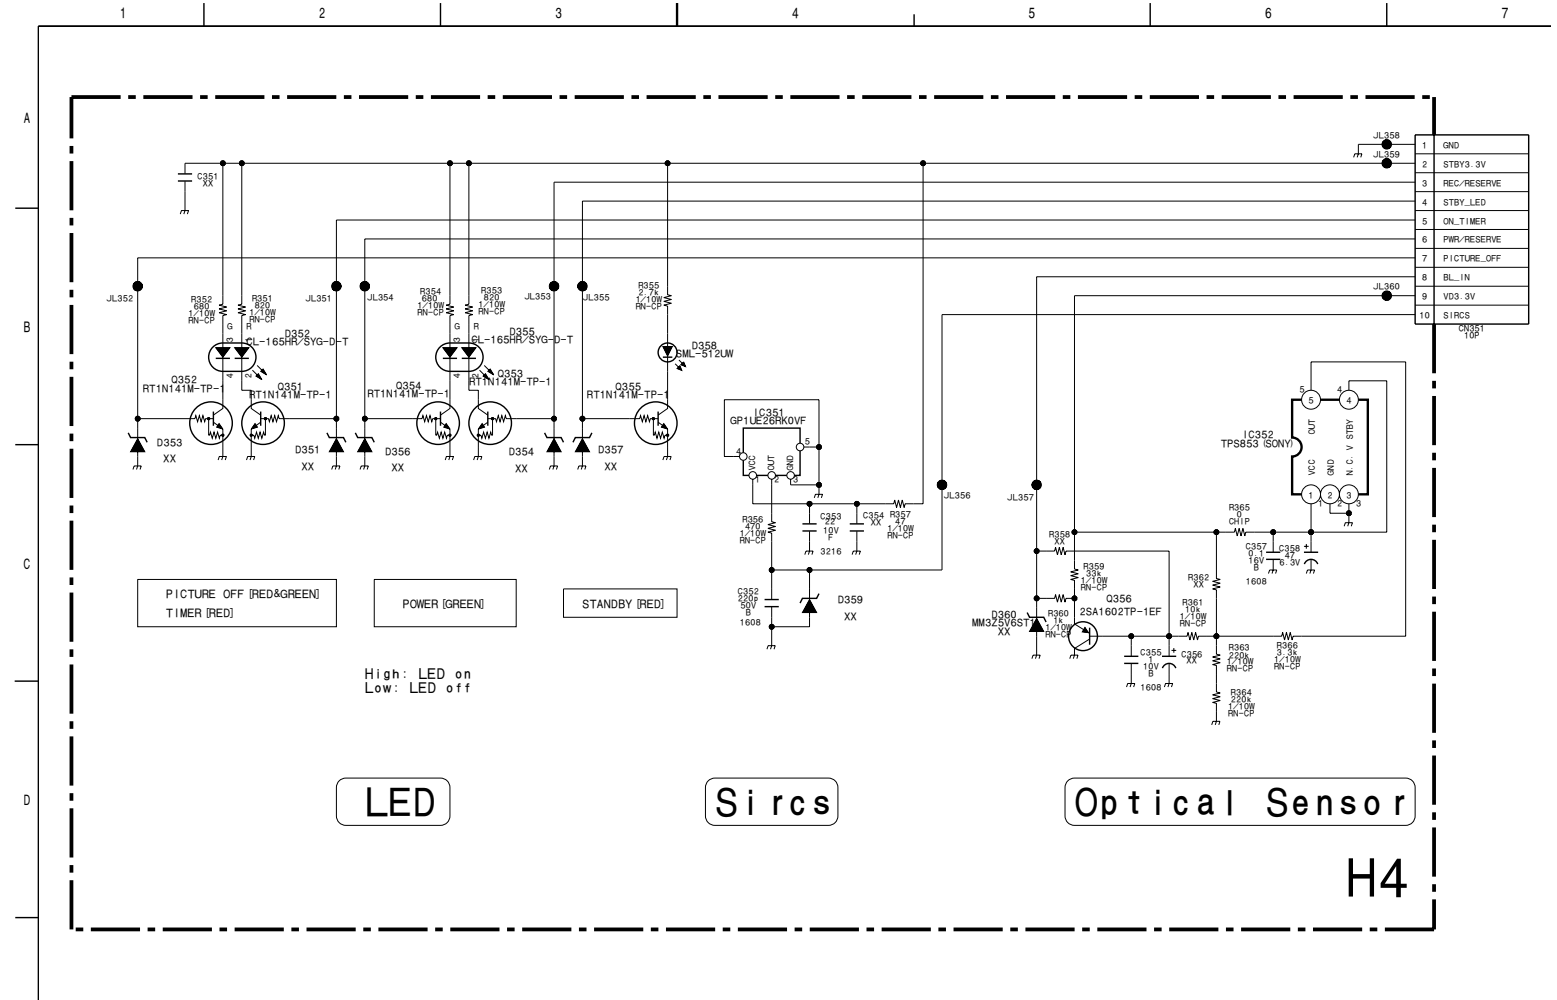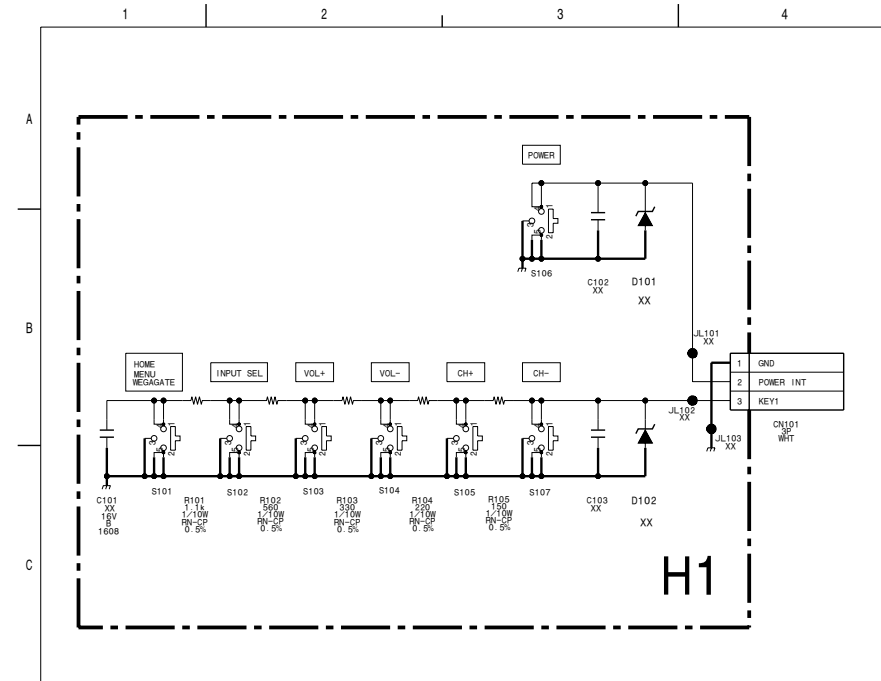

H1


— H1 BOARD —

H1 BOARD (A)

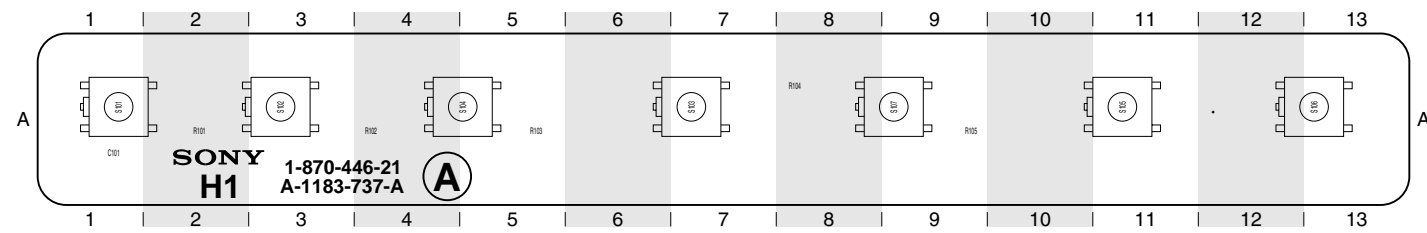

<COMPONENT SIDE>

H1 BOARD (B)

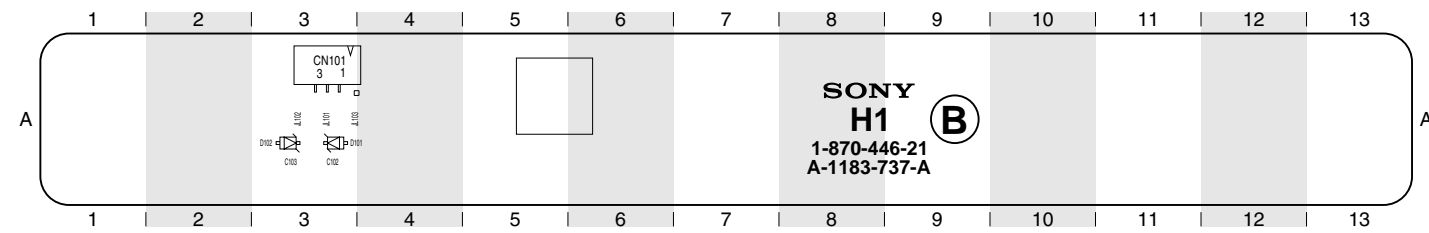


<CONDUCTOR SIDE>

H4


— H4 BOARD —

H4 BOARD (A)

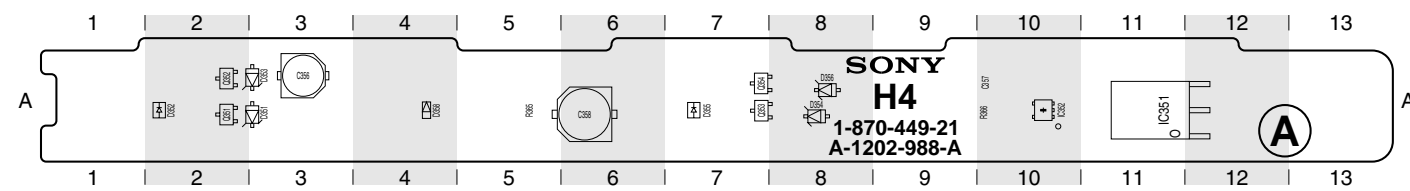



<COMPONENT SIDE>

H4 BOARD (B)

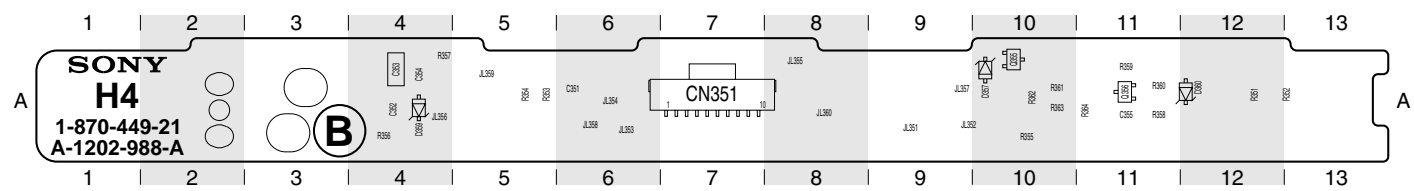

<CONDUCTOR SIDE>


(6) H2 and H46 Boards

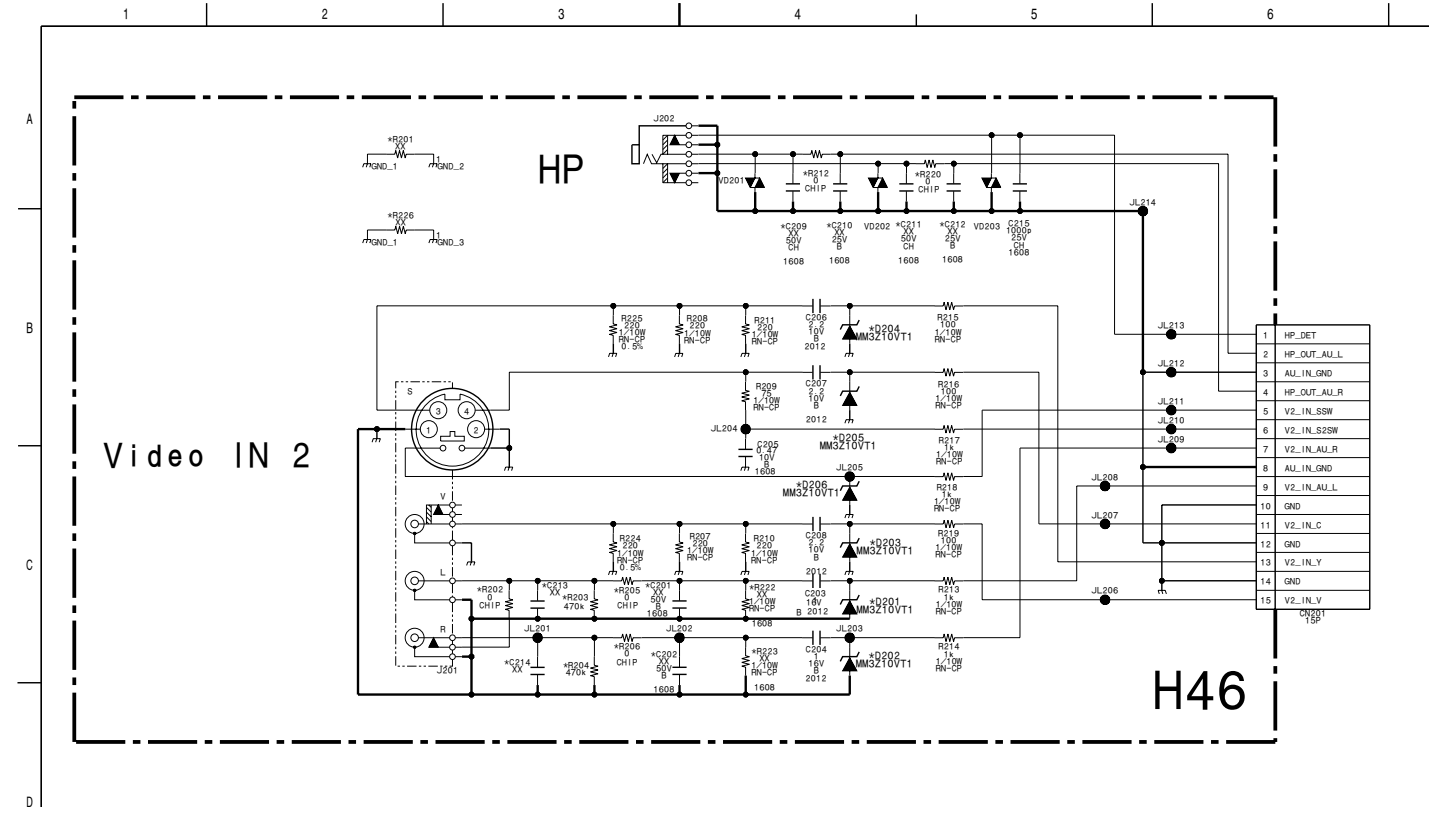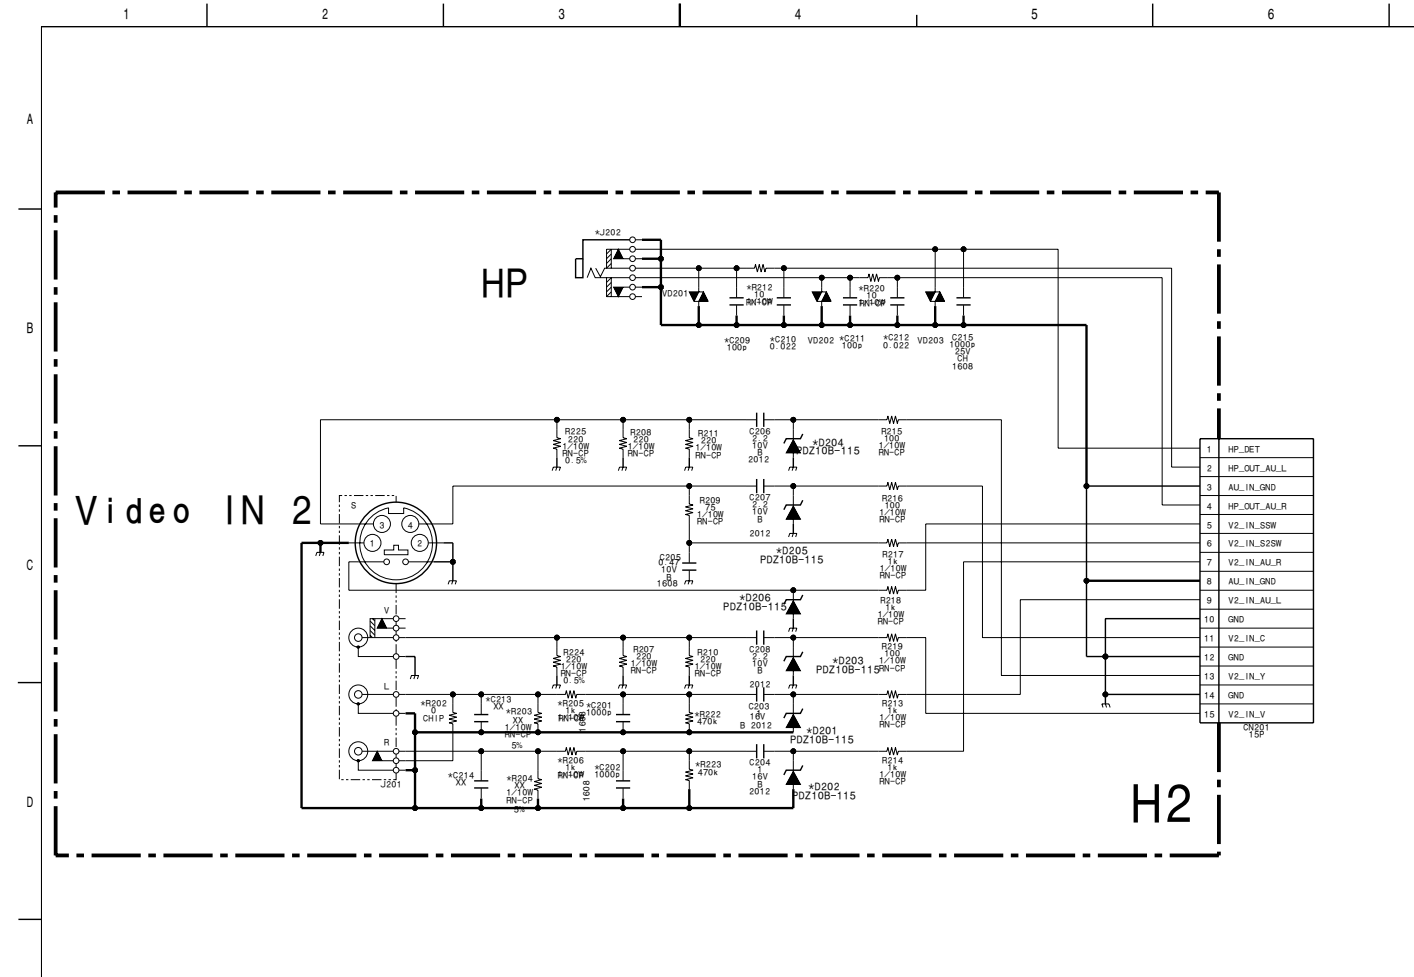

H2


— H2 BOARD —

H2 BOARD (A)

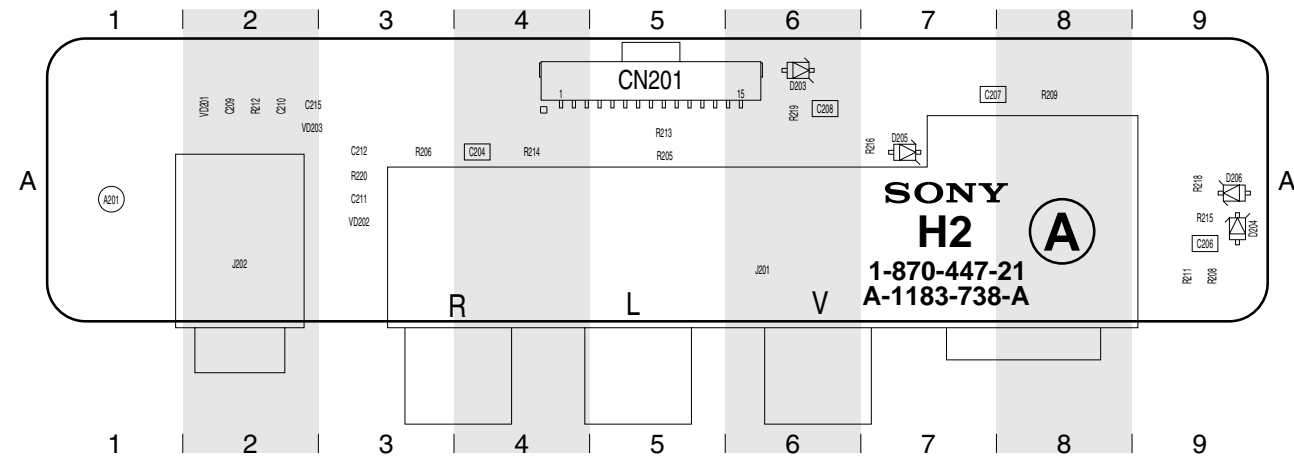

<COMPONENT SIDE>

H2 BOARD (B)

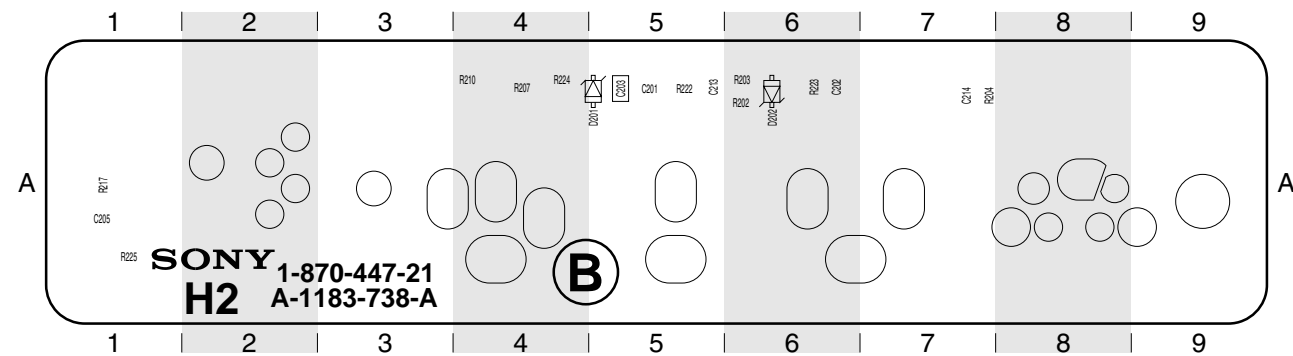


<CONDUCTOR SIDE>

H46


— H46 BOARD —

H46 BOARD (A)

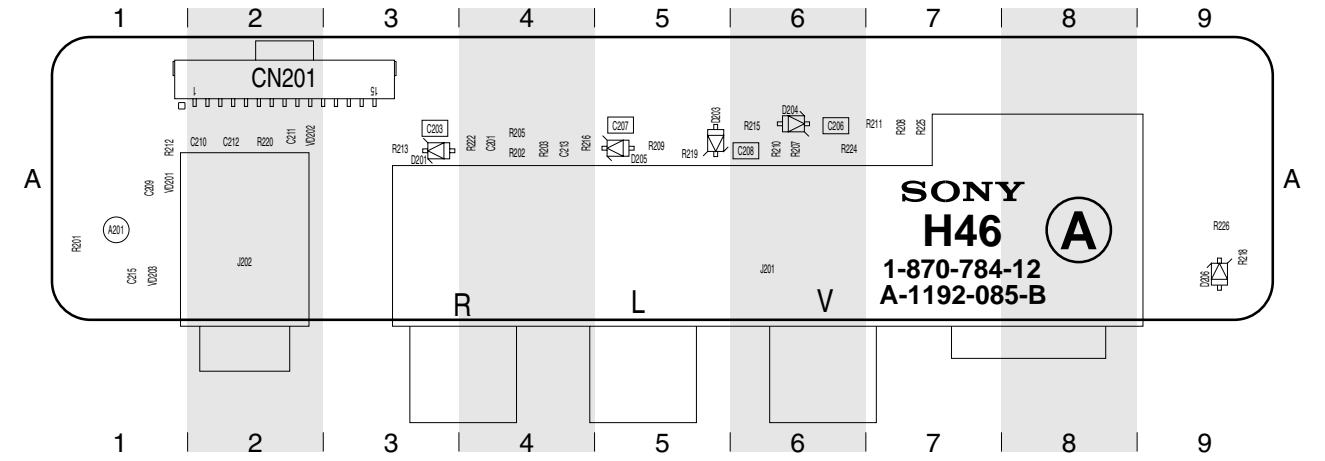


<COMPONENT SIDE>

H46 BOARD (B)

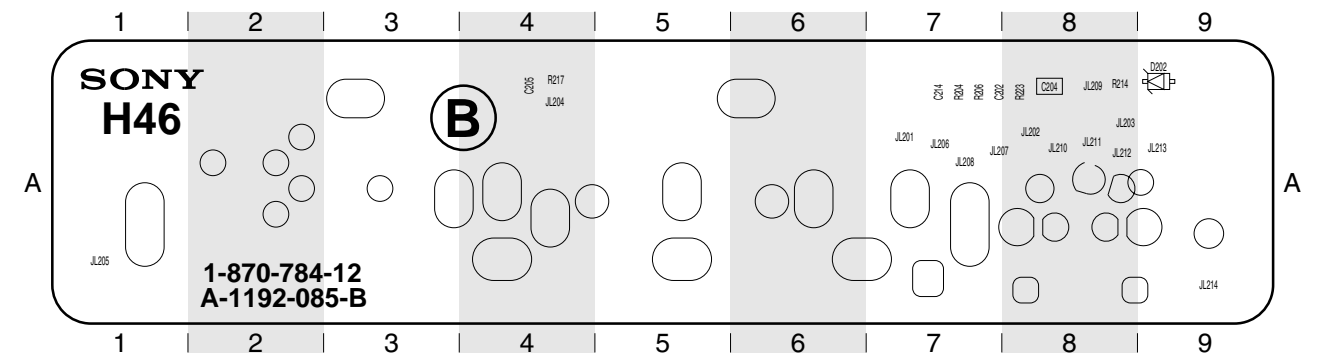


<CONDUCTOR SIDE>

(7) TUG and J Board

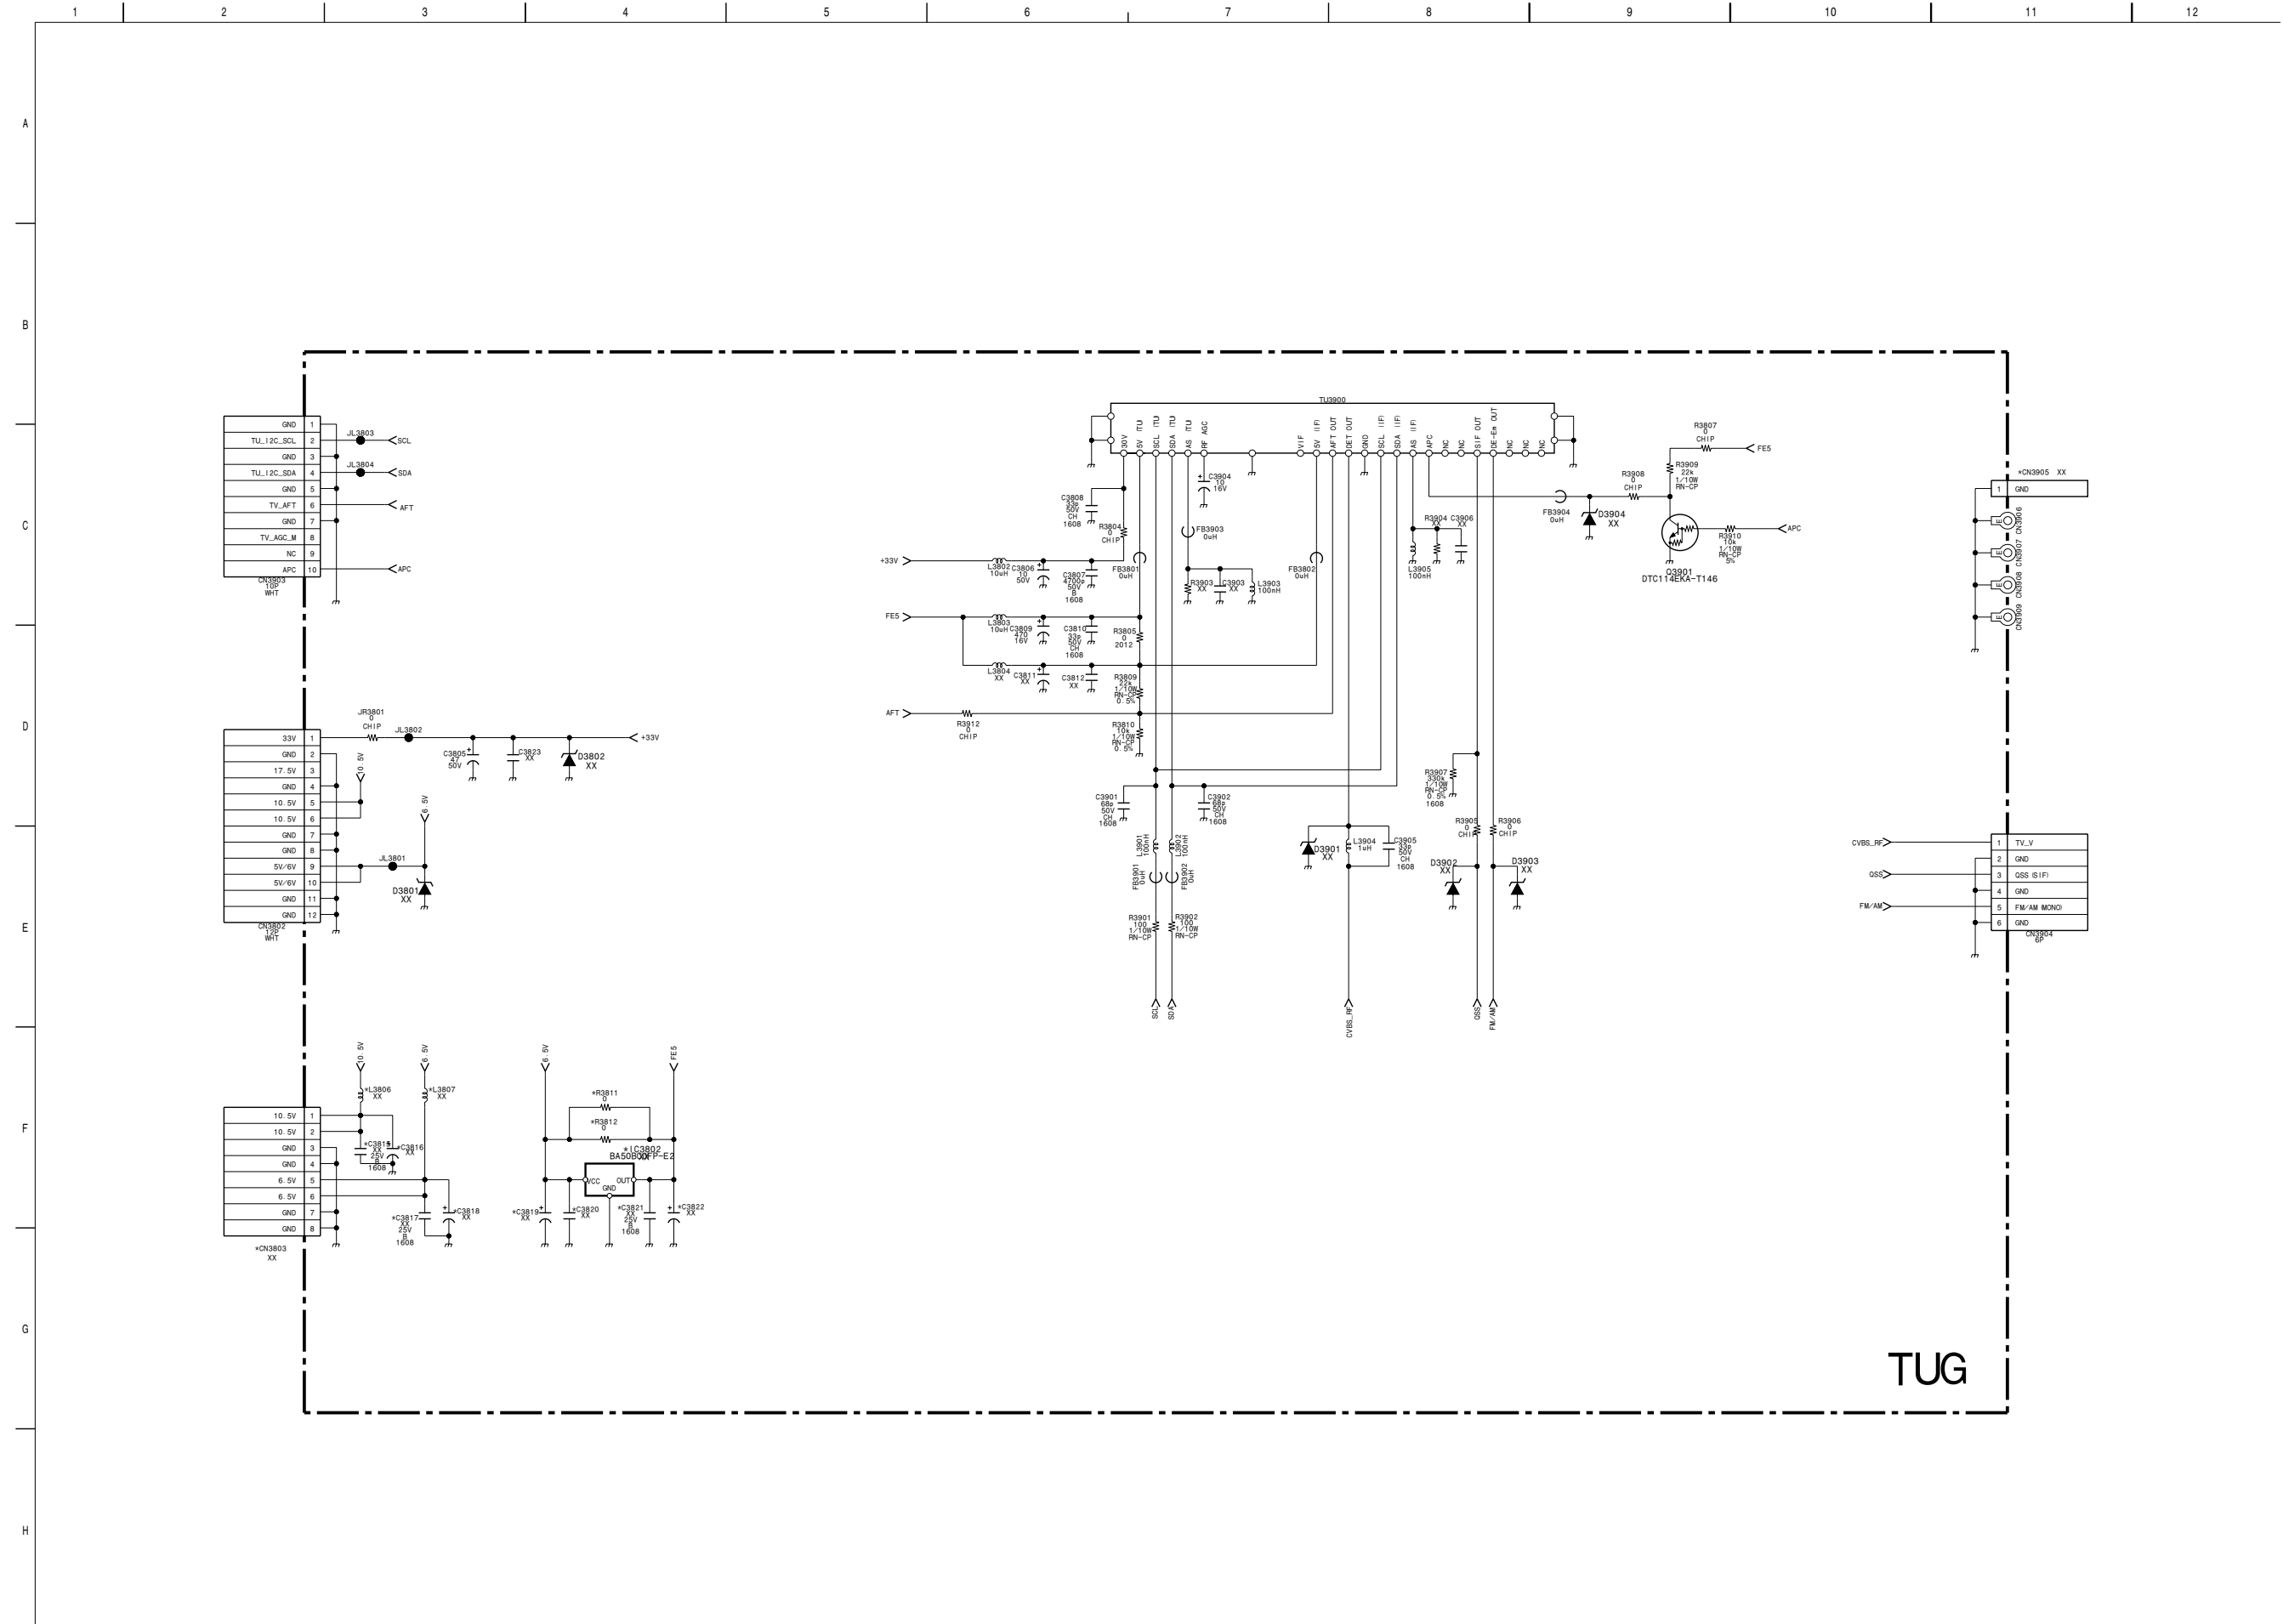


TUG

—TUG BOARD—

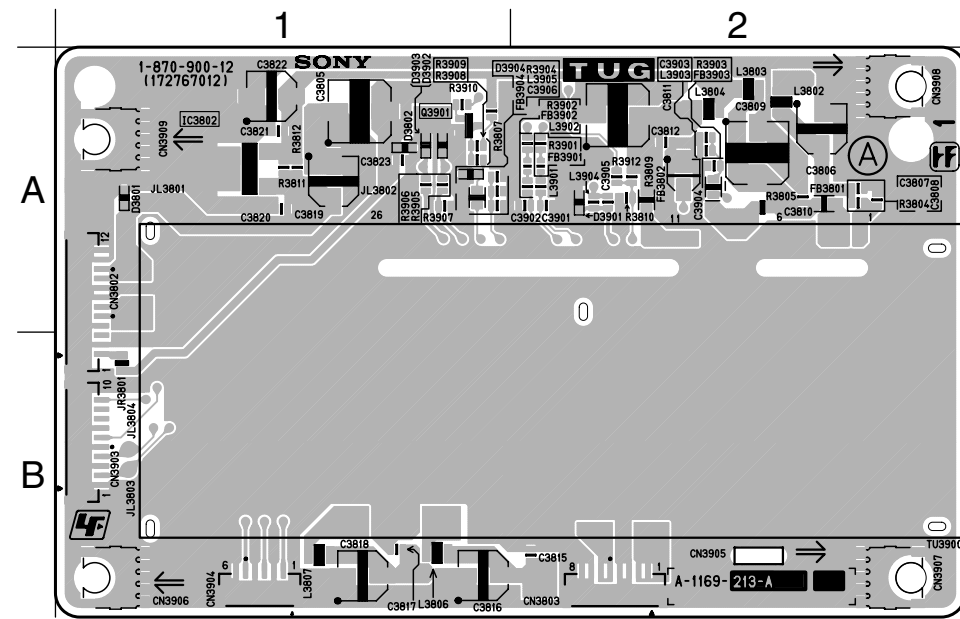

<COMPONENT SIDE>

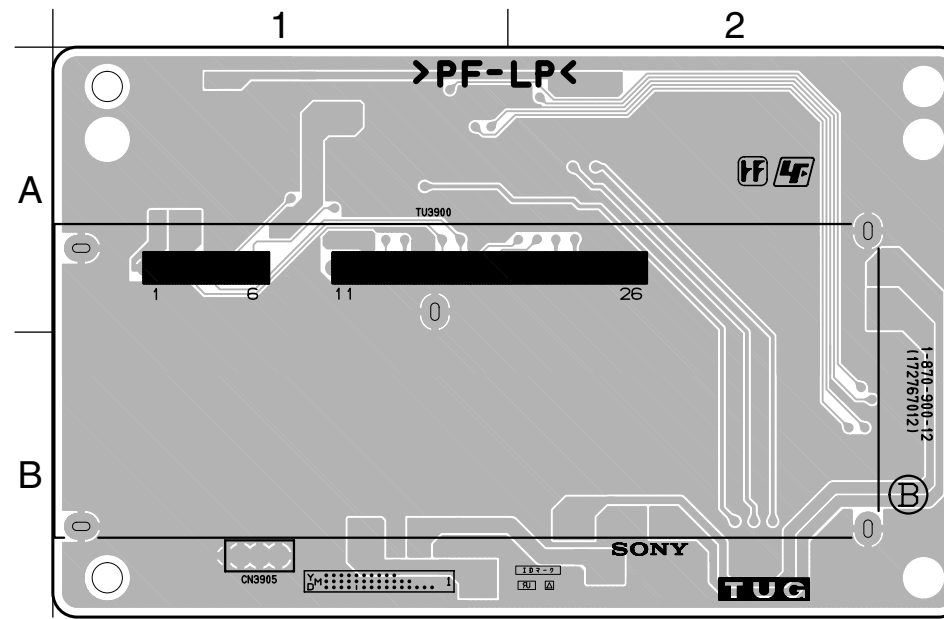

<CONDUCTOR SIDE>

• TUG BOARD SEMICONDUCTOR LOCATION


| IC | | | |
|------------|------------------|------------------|---|
| | (Component Side) | (Conductor Side) | |
| IC3802 | A-1 | - | |
| TRANSISTOR | | | |
| | (Component Side) | (Conductor Side) | * |
| Q3901 | A-1 | | ① |
| DIODE | | | |
| | (Component Side) | (Conductor Side) | * |
| D3801 | A-1 | | ③ |
| D3802 | A-1 | | ③ |
| D3901 | A-2 | | ③ |
| D3902 | A-1 | | ③ |
| D3903 | A-1 | | ③ |
| D3904 | A-1 | | ③ |

*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 2-8)


2-5. SEMICONDUCTORS

IC


ADT75ARZ-REEL
BR24L02F-WE2
CS4335-KSZR
FA5501AN-D1-TE1
LM75BIMX-3/NOPB
M24256-BWMN6TP(A)
M24C02-WMN6T(B)
MIP2H2
MM1662FTRE
NJM3414AV(TE2)
NJM4558V-TE2
PCA9517DP.118
S-35390A-J8T1G
SN74LVC14APWR
SN74LVC2G04DCKR
SN74LVC2G34DCKR
TMP75AIDR




BA09FP-E2
MM1431ATT (CN)
MM1530ATT
PST3629UL
S-1132B18-M5T1G
TC7SH86FU(T5RSOYJF)




BA50BC0FP-E2




BD9775FV




CXA2069Q
CXA2069Q-TL




CXD9199GG-D




CXD9841P




EM6A9320BI-5MG



GP1UE26RK0VF




MB91305PMC-G-BNDE1




MM1431ATT




M61571AFP-DF0T




SI8008TM-TL




SN74CBTLV3245APWR




SN74LV132APWR
TC74LCX14FT(EKJ)
TC74LCX14FT(EL)



S29AL016D70TFI010-WAX2AU1




TPS853(SONY)




TRANSISTOR


DTA114TUA-T106
DTC114EUA-T106
DTC115EUA-T107
STC144EUA-T106
DTC614TUT106
RT1N141M-TP-1
RT1N441M-TP-1
2SA1037AK-T146-QR
2SA1037AK-T146-R
2SA1235-F
2SA1235TP-1EF
2SA1577-QR
2SA1602-F
2SA1602TP-1EF
2SC1623-L5L6
2SC2412K-T-146-QR
2SC3052EF-T1-LEF
2SC3624A-T1L15L16
2SC4154-F
2SC4154TP-1EF




DTC114EKA-T146
DTC123JUA-T106




FDS6690A
RSS050P03FTB
RSS100N03TB




HN1B01FU-TE85R




RSQ035P03TR



SSM6N16FU




2SB1122-S
2SB1122-ST-TD-E
2SD1621ST-TD-E



2SK1828
2SK1828TE85L
2SK2158-T2B




2SK3568(LBS1SONY.Q)
2SK3797(LBS1SONY.Q)




DIODE

BAT54HT1
DTZ10B
HZU16B2TRF-E
MA111-TX
MA113-(TX)
RD5.6SB-T1
UDZ-TE-17-6.8B
UDZ-TE-17-7.5B



CL-165HR/SYG-D-T



D1NS4
D1NS4-TR2

D026

D10SC6M-4012




D15XB60




D5L60




EP05FA20
MM3Z10VT1
MM3Z11VT1
MM3Z16VST1
MM3Z22VT1
MM3Z4V3ST1
MM3Z6V8ST1




ERA22-08KFLB




FSF05A60




MA8160-M
MA8160-M-TX
MA8220-TX




MMDL914T1




M1FM3
MA8043-M
MA8043-M(TX)
RB501V-40TE-17
UDZSTE-177.5B




M1MA152WA-T1




M1MA152WK-T1




P6SMBJ30A-5
PTZ-TE25-6.2A
PTZ-TE25-6.8B
RB050L-40TE25
RSX201L-30TE25




SML-512UWT86




UMZ16NT106



1PS302





10ERB20-TB3
UF4005/23



SECTION 3 EXPLODED VIEWS

NOTE:


The components identified  marked are critical for safety.
Replace only with the part number specified.

Note: The components identified by mark  contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

3-1. KDL-32V2000


3-1-1. REAR COVER ASSY AND STAND ASSY

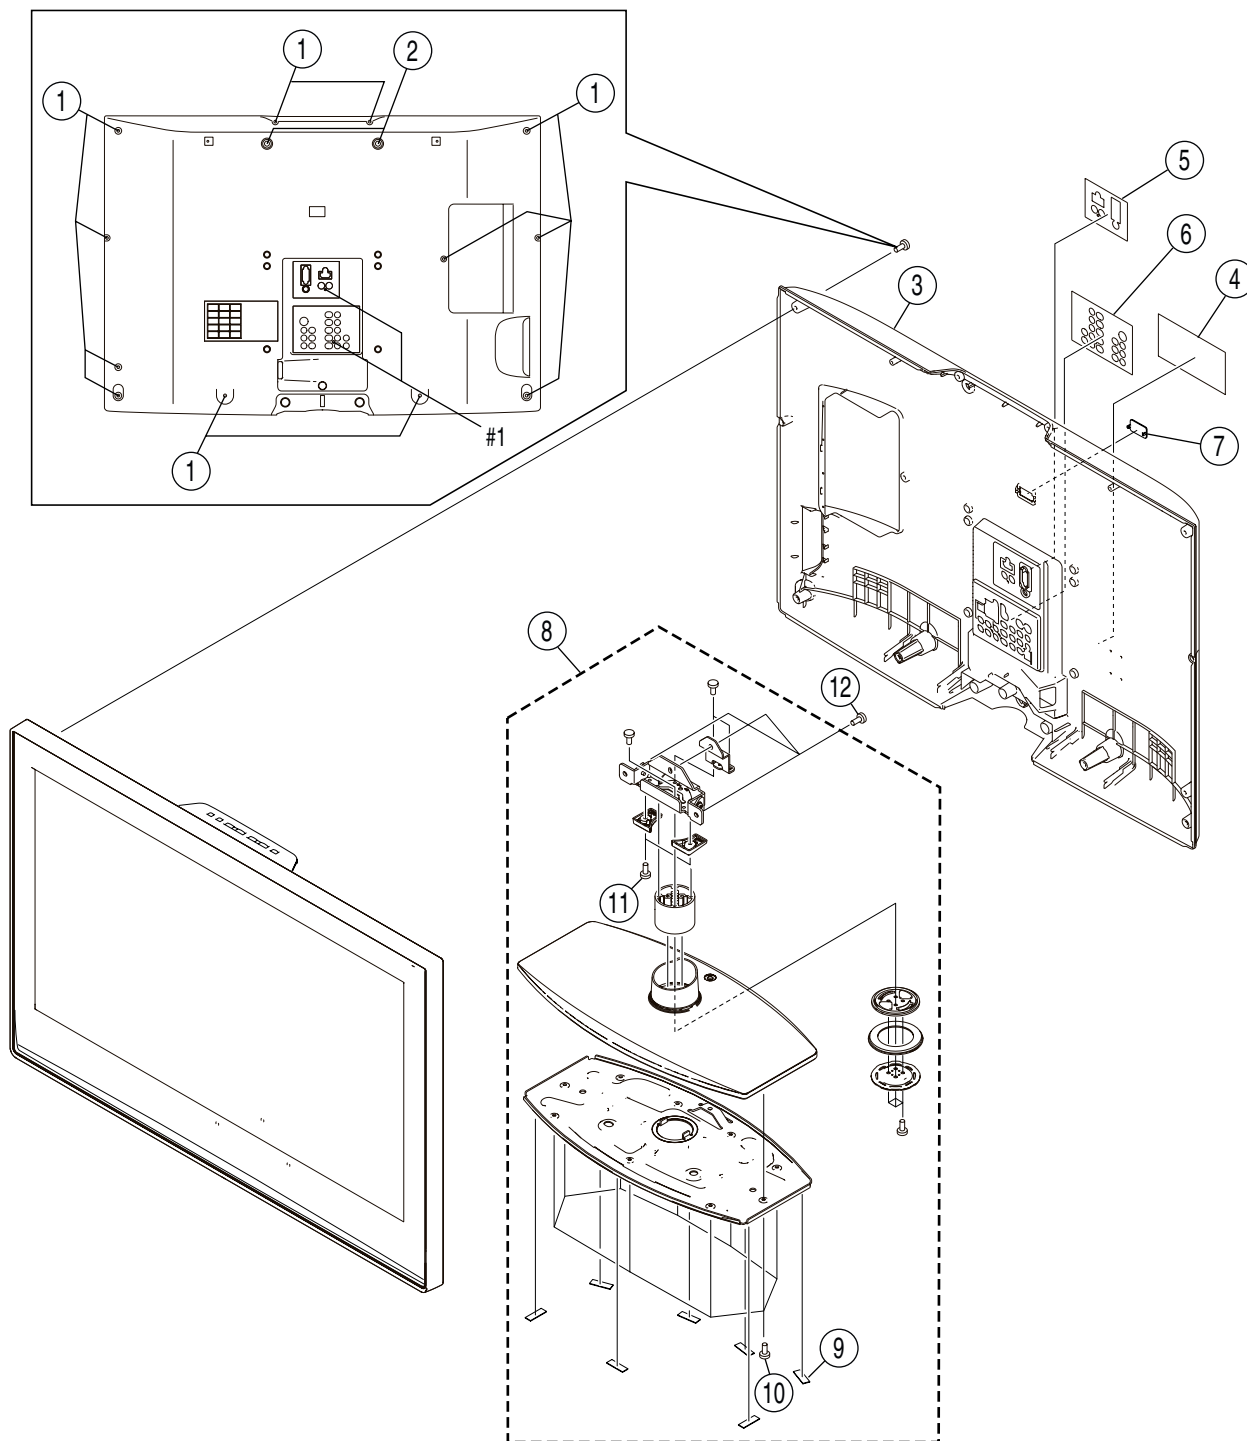

| REF. No. | PART No. | DESCRIPTION | MARK | REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|----------------------|------|----------|--------------|-----------------------------|-----------|
| 1 | 2-580-640-01 | SCREW, +BVTP2 4X16 | | 6 | 2-696-269-31 | LABEL, HDMI | |
| 2 | 2-580-611-01 | SCREW, +PSW M6X16 | | 7 | 2-664-636-01 | COVER, ECS | |
| 3 | 2-672-438-22 | COVER, REAR (32) | | 8 | X-2148-379-1 | ASSY, STAND (M) B | 9, 10, 11 |
| 4 | 2-887-476-11 | LABEL, INFORMATION | | 9 | 2-675-191-02 | FOOT | |
| 5 | 2-668-389-61 | LABEL, TERMINAL REAR | | 10 | 2-580-644-01 | SCREW, +KTP2 3X8 | |
| | | | | 11 | 2-580-602-01 | SCREW, +PSW M4X12 | |
| | | | | #1 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |

KDL-32V2000


3-1-2. H1 AND H2 BOARDS AND FRAME

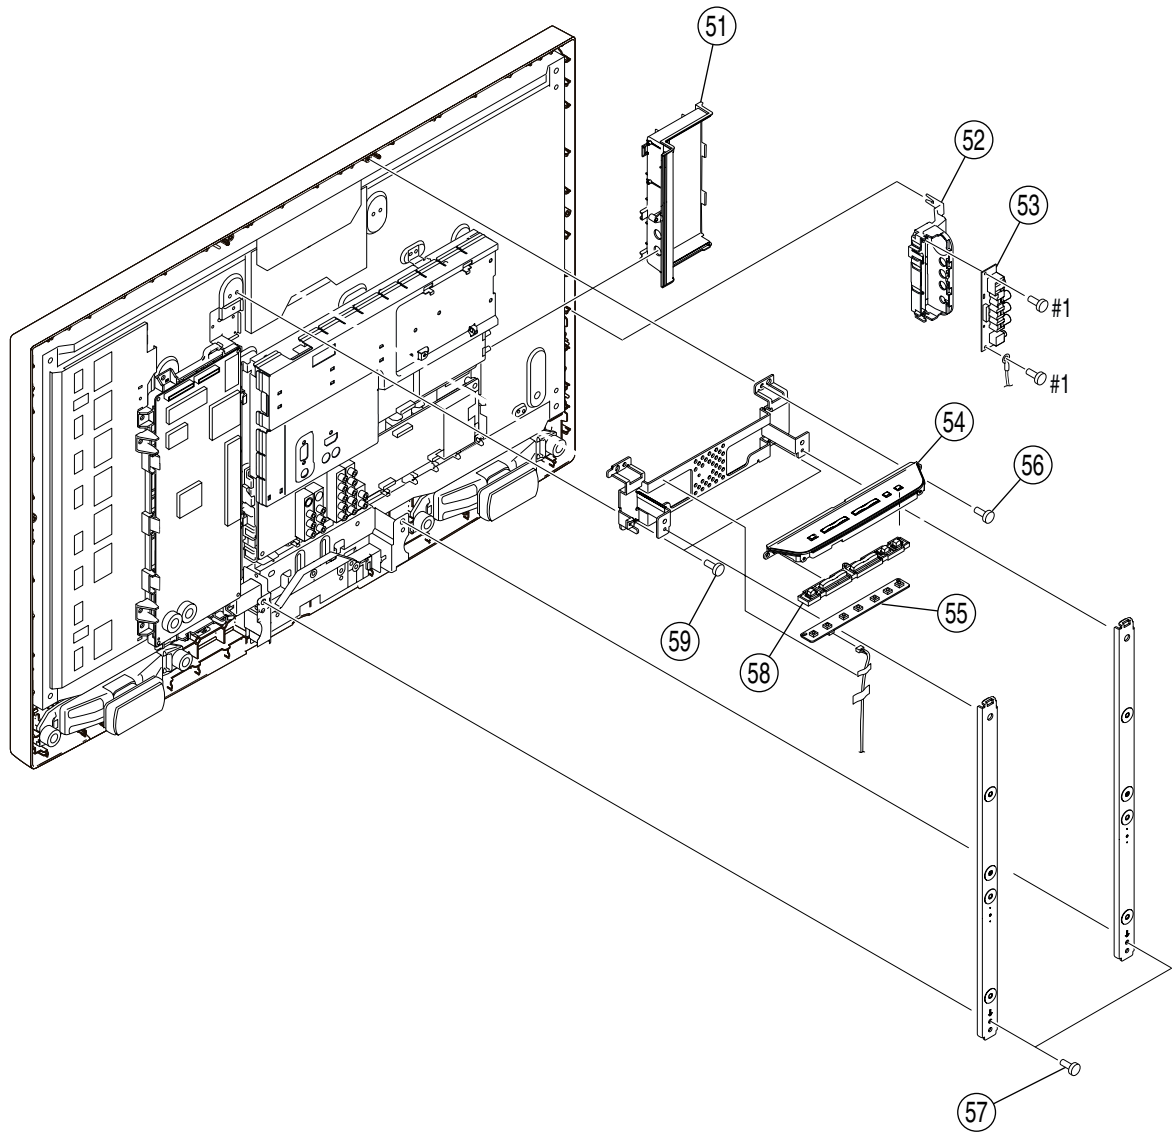



| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|--------------------------------|------|
| 51 | X-2176-136-1 | SIDE, TERMINAL (M) ASSY | |
| 52 | X-2176-139-1 | HOLDER, SIDE JACK (M-AUS) ASSY | |
| 53 | A-1211-877-A | H2 MOUN | |
| 54 | 2-663-978-31 | COVER, BUTTON | |
| 55 | A-1211-876-A | H1 MOUNT | |

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|-----------------------------|------|
| 56 | 2-580-639-01 | SCREW, +BVTP2 4X12 | |
| 57 | 2-580-603-01 | SCREW, +PSW M4X16 | |
| 58 | 2-663-977-01 | BUTTON, MULTI | |
| 59 | 2-580-600-01 | SCREW, +PSW M4X8 | |
| #1 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |

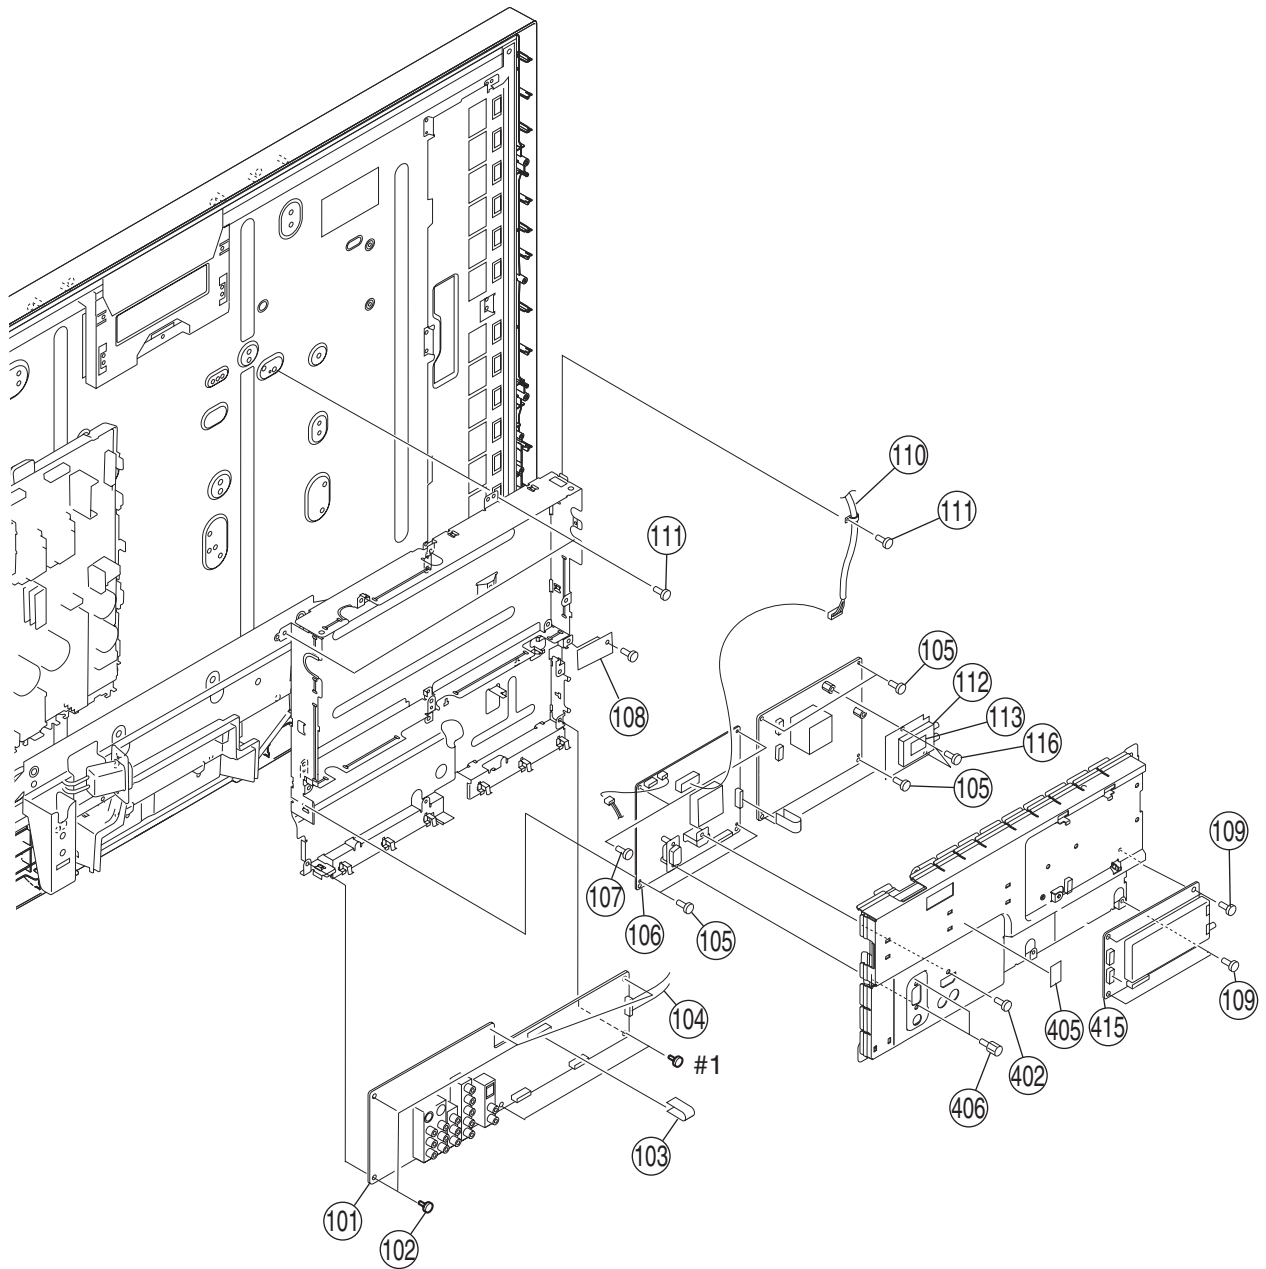KDL-32V2000
3-1-3. CHASSIS-1




Note: The components identified by mark  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--|-------------------------------|------|
| 101 | A-1183-647-A | AG MOUNT | |
| 102 | 2-674-965-11 | SCREW, +PSW 3SG | |
| 103 | 1-910-024-83 | FFC CONNECTOR ASSY 49P | |
| 104 | 1-910-030-24 | SP CONNECTOR | |
| 105 | 2-674-965-11 | SCREW, +PSW 3SG | |
| 106 |  A-1203-529-A | B MOUNT | |
| 107 | 2-580-629-01 | SCREW, +BVST 3X8 | |
| 108 | A-1193-318-A | J MOUNT | |
| 109 | 2-580-591-01 | SCREW, +PSW M3X5 | |
| 110 | 1-832-470-11 | HERNESS WITH CONNECTOR (LVDS) | |

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|-----------------------------|------|
| 111 | 2-580-591-01 | SCREW, +PSW M3X5 | |
| 112 | 1-693-720-21 | TUNER | |
| 113 | 2-586-175-01 | SHEET B, RADIATION | |
| 114 | 2-580-626-01 | SCREW, SP4-40 UNC(HEX) | |
| 115 | A-1183-902-A | TUG MOUNT | |
| #1 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |


KDL-32V2000
3-1-4. CHASSIS-2

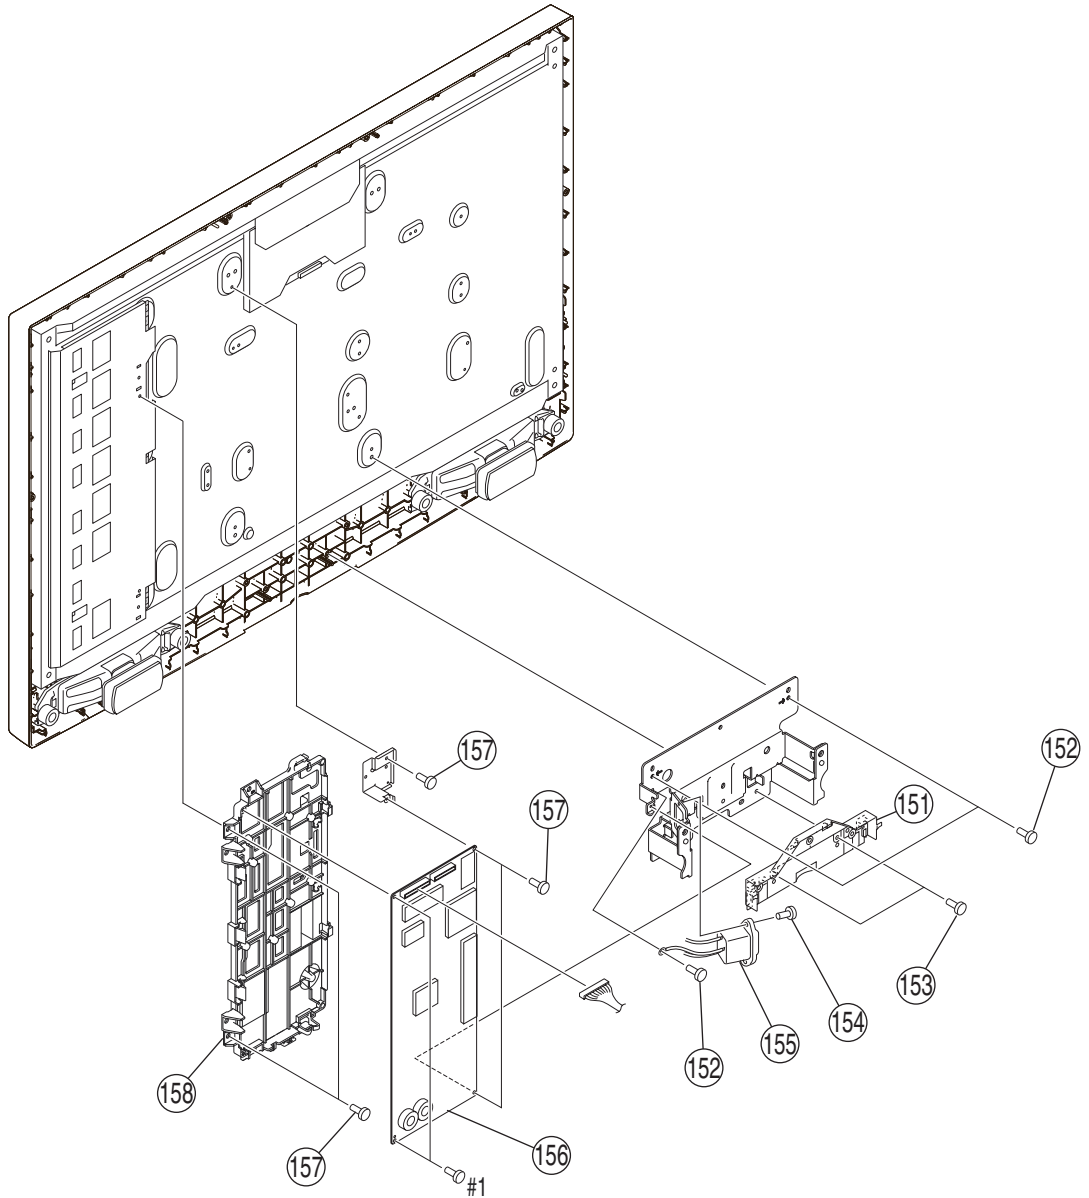

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|-------------------------------|------|
| 151 | 2-660-802-01 | COVER, UNDER (M) | |
| 152 | 2-580-600-01 | SCREW, +PSW M4X8 | |
| 153 | 2-580-640-01 | SCREW, +BVTP2 4X16 | |
| 154 | 2-596-649-01 | +KTT 3X10 (S TYPE) | |
| 155 | 1-819-729-14 | INLET, AC (WITH NOISE FILTER) | |

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|-----------------------------|------|
| 156 | 1-468-980-12 | G1 MOUNT | |
| 157 | 2-580-591-01 | SCREW, +PSW M3X5 | |
| 158 | X-2109-589-1 | BRACKET, G1 ASSY (A) | 159 |
| #1 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |

KDL-32V2000
3-1-5. H4 BOARD AND SPEAKER

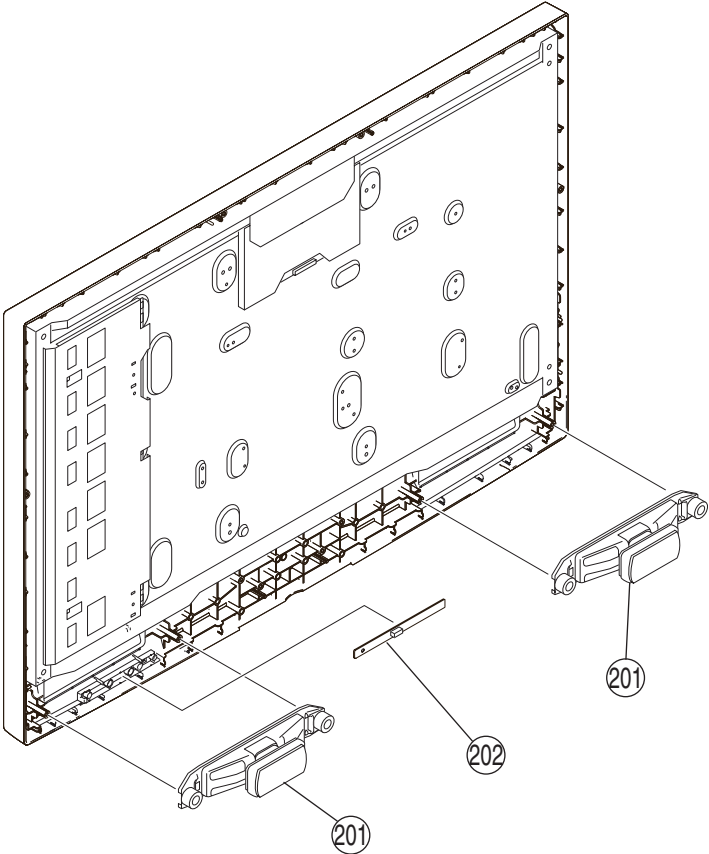


| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|------------------------|------|
| 201 | 1-826-363-11 | LOUDSPEAKER (4.2X15CM) | |
| 202 | A-1211-878-A | H4 MOUNT | |

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|----------|-------------|------|
| | | | |

KDL-32V2000

3-1-6. BEZEL ASSY AND LCD PANEL

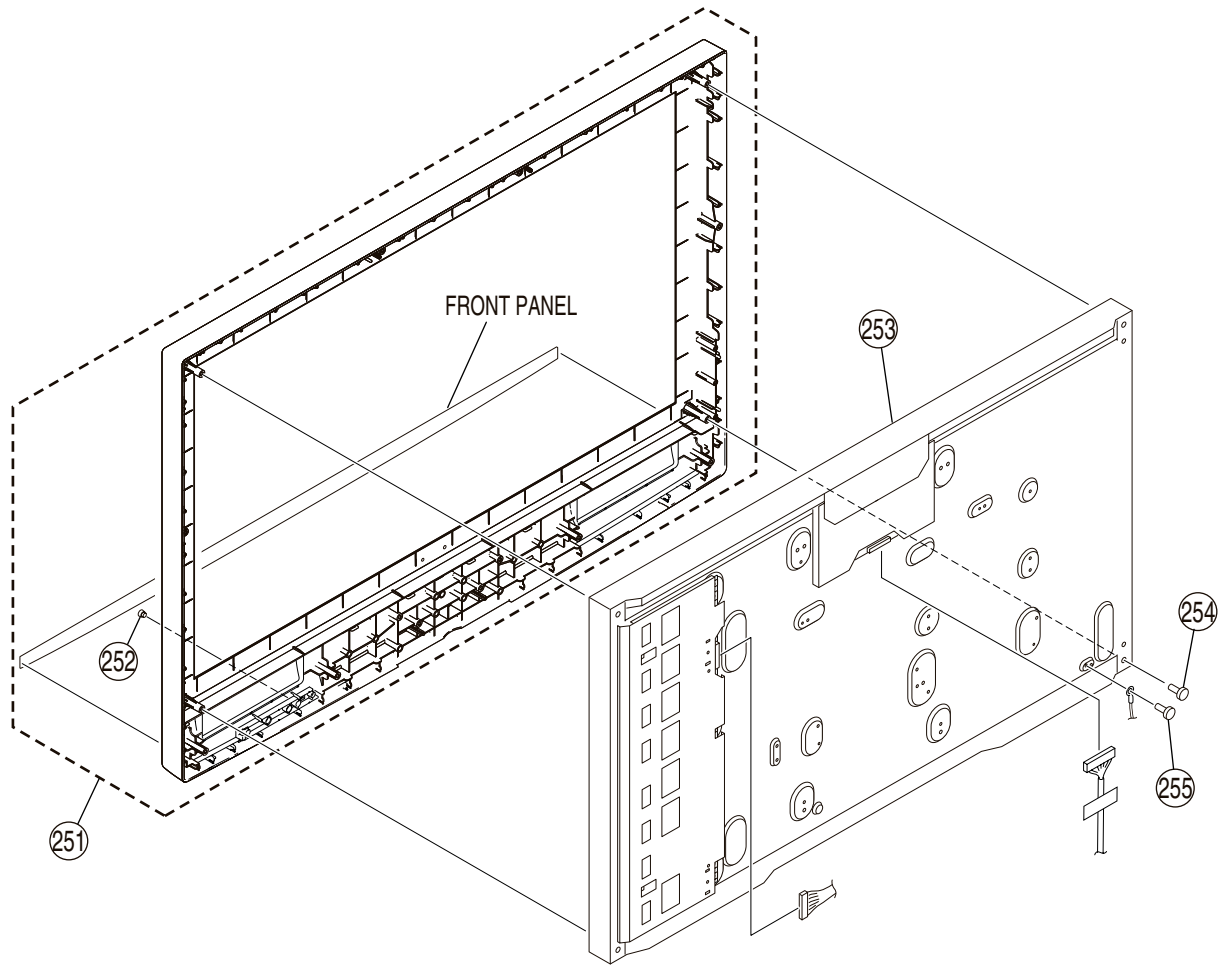


| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|-----------------------------|------|
| 251 | X-2109-500-5 | BEZEL (32ST) ASSY | 252 |
| 252 | X-2176-252-1 | GUIDE, LIGHT ASSY | |
| 253 | 2-679-403-41 | ORNAMENTAL PANEL 932VJ) | |
| 254 | 1-802-135-51 | LCD PANEL (32INCH WXGA+TFT) | |
| 255 | 2-580-591-01 | SCREW, +PSW M3X5 | |

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|----------|-------------|------|
| | | | |


3-2. KDL-40/46V2000

3-2-1. REAR COVER ASSY AND STAND ASSY

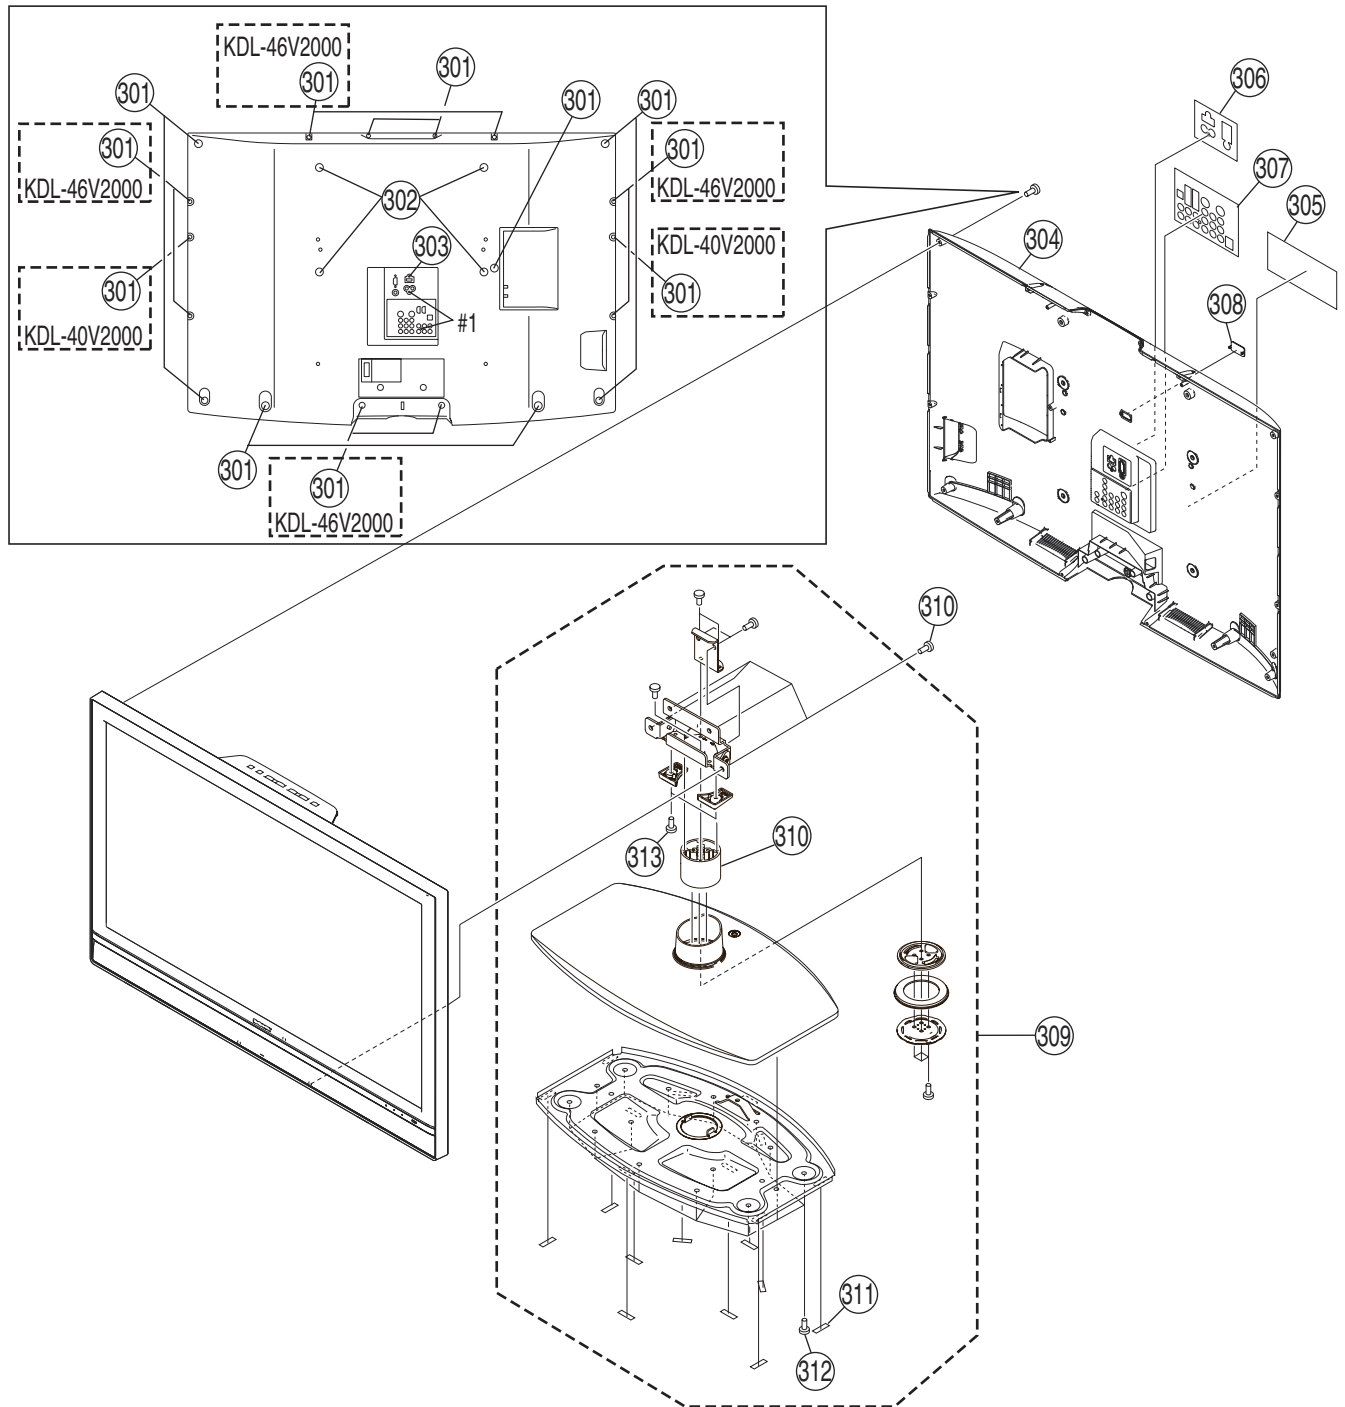

| REF. No. | PART No. | DESCRIPTIONRE | MARK | REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|---------------------------------------|--------------------|----------|--------------|-----------------------------|------|
| 301 | 2-580-640-01 | SCREW, +BVTP2 4X16 | | 311 | 2-675-191-02 | FOOT | |
| 302 | 2-580-611-01 | SCREW, +PSW M6X16 | | 312 | 2-580-647-01 | SCREW, +KTP2 4X12 | |
| 303 | 2-580-591-01 | SCREW, +PSW M3X5 | | 313 | 2-580-602-01 | SCREW, +PSW M4X12 | |
| 304 | X-2109-842-1 | COVER (40VJ), REAR ASSY (KDL-40V2000) | | 314 | 2-580-608-01 | SCREW, +PSW M5X16 | |
| | X-2148-061-1 | COVER (46V), REAR ASSY (KDL-46V2000) | | #1 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |
| 305 | 2-887-476-01 | LABEL, INFORMATION (KDL-40V2000) | | | | | |
| | 2-887-476-21 | LABEL, INFORMATION (KDL-46V2000) | | | | | |
| 306 | 2-696-269-31 | LABEL, HDMI | | | | | |
| 307 | 2-668-389-61 | LABEL, TERMINAL REAR | | | | | |
| 308 | 2-664-636-01 | COVER, ECS | | | | | |
| 309 | X-2148-378-2 | STAND ASSY (L) B | 310, 311, 312, 313 | | | | |
| 310 | * 2-687-400-01 | NECK (L) | | | | | |


KDL-40/46V2000
3-2-2. CHASSIA-1

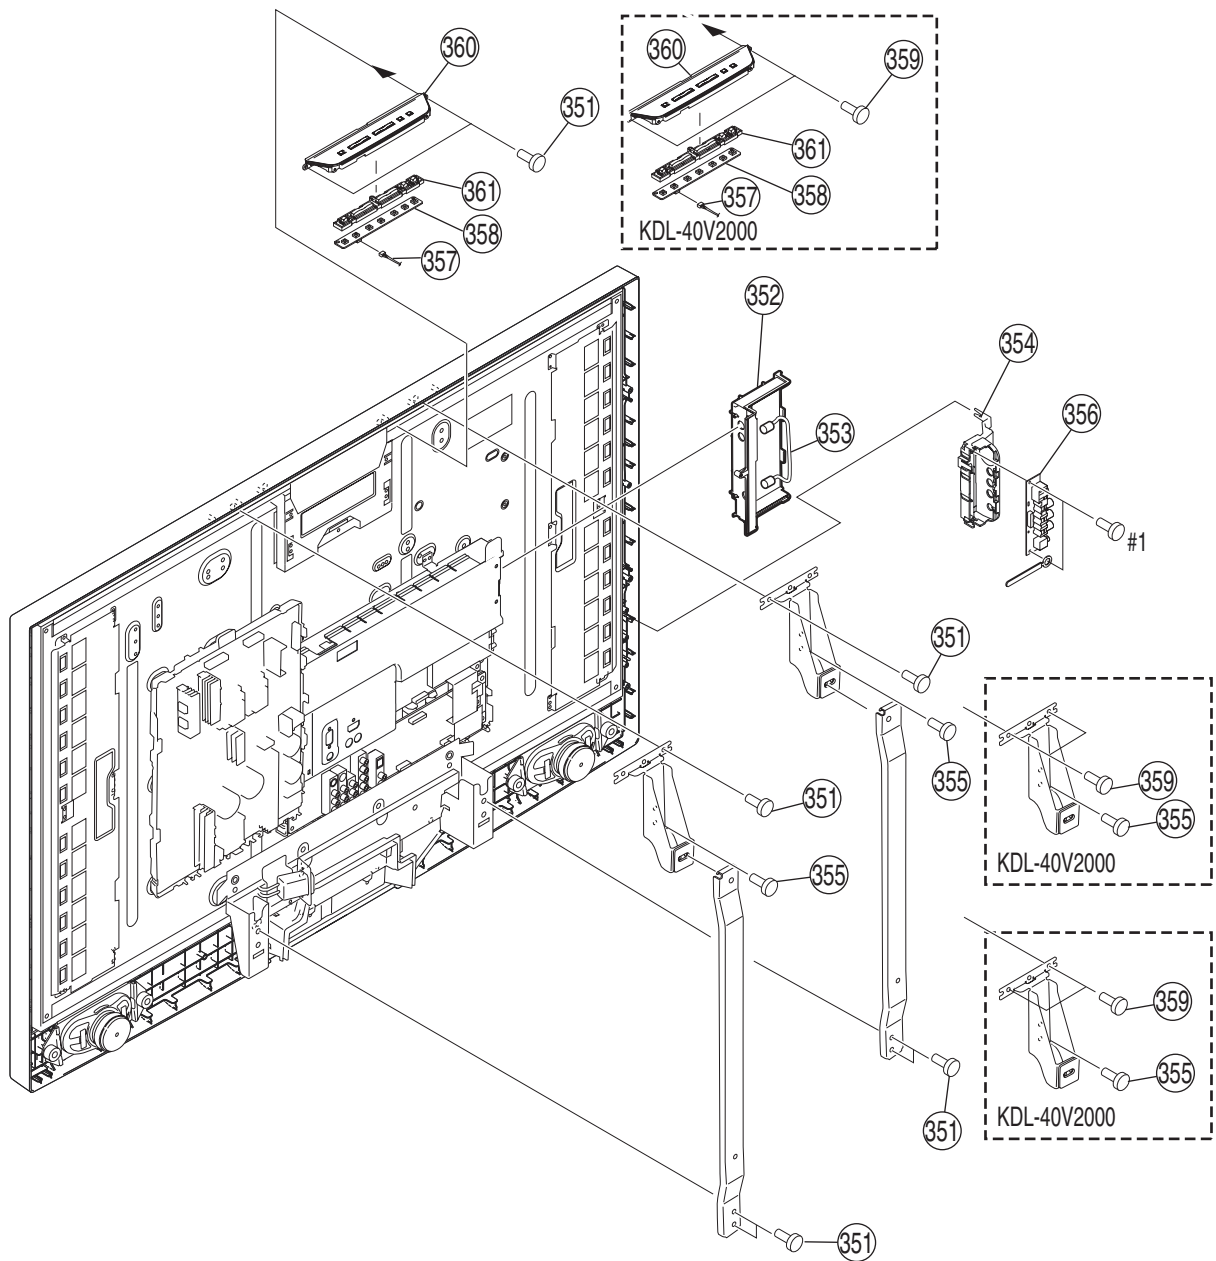




| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|--|------|
| 351 | 2-580-608-01 | SCREW, +PSW M5X16 | |
| 352 | X-2176-194-1 | SIDE,TERMINAL (M) ASSY | |
| 353 | 1-833-150-11 | ANTENNA CABLE | |
| 354 | 2-663-986-31 | HOLDER, SIDE JACK (L)(KDL-40V2000) | |
| | X-2176-195-1 | HOLDER, SIDE JACK (L-AUS) ASSY (KDL-46V2000) | |
| 355 | 2-580-606-01 | SCREW, +PSW M5X8 | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|----------------------------------|------|
| 356 | A-1211-877-A | H2 MOUNT (KDL-40V2000) | |
| | A-1211-879-A | H46 MOUNT (KDL-46V2000) | |
| 357 | 1-910-024-91 | CONNECTOR ASSY 3P | |
| 358 | A-1211-876-A | H1 MOUNT | |
| 359 | 2-580-639-01 | SCREW, +BVTP2 4X12 (KDL-40V2000) | |
| 360 | 2-663-978-31 | COVER, BOTTON | |
| 361 | 2-663-977-01 | BOTTON, MULTI | |
| #1 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |

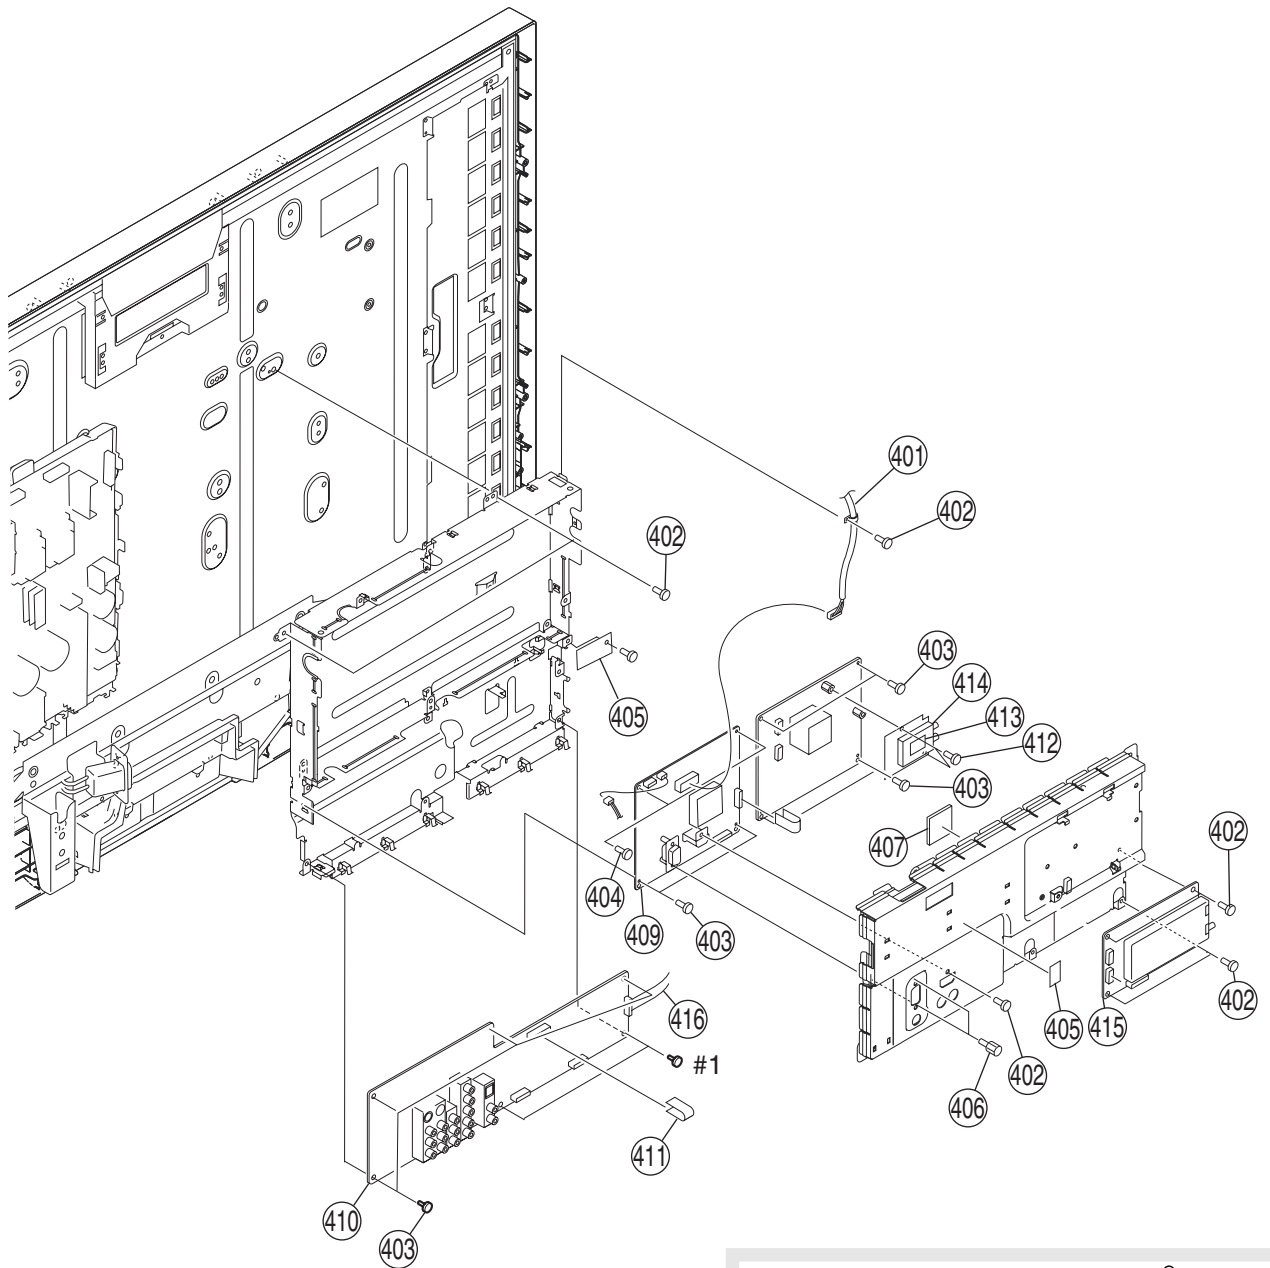KDL-40/46S200A
3-2-3. CHASSIS-1




Note: The components identified by mark  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--|---|------|
| 401 | 1-832-470-11 | HARNESS WITH CONNECTOR (LVDS) (KDL-40V2000) | |
| | 1-832-469-12 | HARNESS WITH CONNECTOR (LVDS) (KDL-46V2000) | |
| 402 | 2-580-591-01 | SCREW, +PSW M3X5 | |
| 403 | 2-674-965-11 | SCREW, +PSW 3SG | |
| 404 | 2-580-629-01 | SCREW, +BVST 3X8 | |
| 405 | A-1193-318-A | J MOUNT | |
| 406 | 2-580-626-01 | SCREW, SP 4-40 UNC(HEX) | |
| 407 | * 4-092-814-02 | CUSHION D | |
| 408 | 1-910-030-48 | FFC CONNECTOR ASSY 20P | |
| 409 |  A-1203-527-A | B MOUNT (KDL-46V2000) | |
| |  A-1203-528-A | B MOUNT (KDL-40V2000) | |
| 410 | A-1183-647-A | AG MOUNT | |


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|-------------------------------------|------|
| 411 | 1-910-024-83 | FFC CONNECTOR ASSY 49P | |
| 412 | 2-580-595-01 | SCREW, +PSW M3X12 (KDL-40V2000) | |
| 413 | 2-586-175-01 | SHEET B, RADIATION | |
| 414 | 1-693-720-21 | TUNER | |
| 415 | A-1183-902-A | TUG MOUNT | |
| 416 | 1-910-030-31 | SP CONNECTOR ASSY 40P (KDL-40V2000) | |
| #1 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |

KDL-40/46V2000
3-2-4. CHASSIS-2

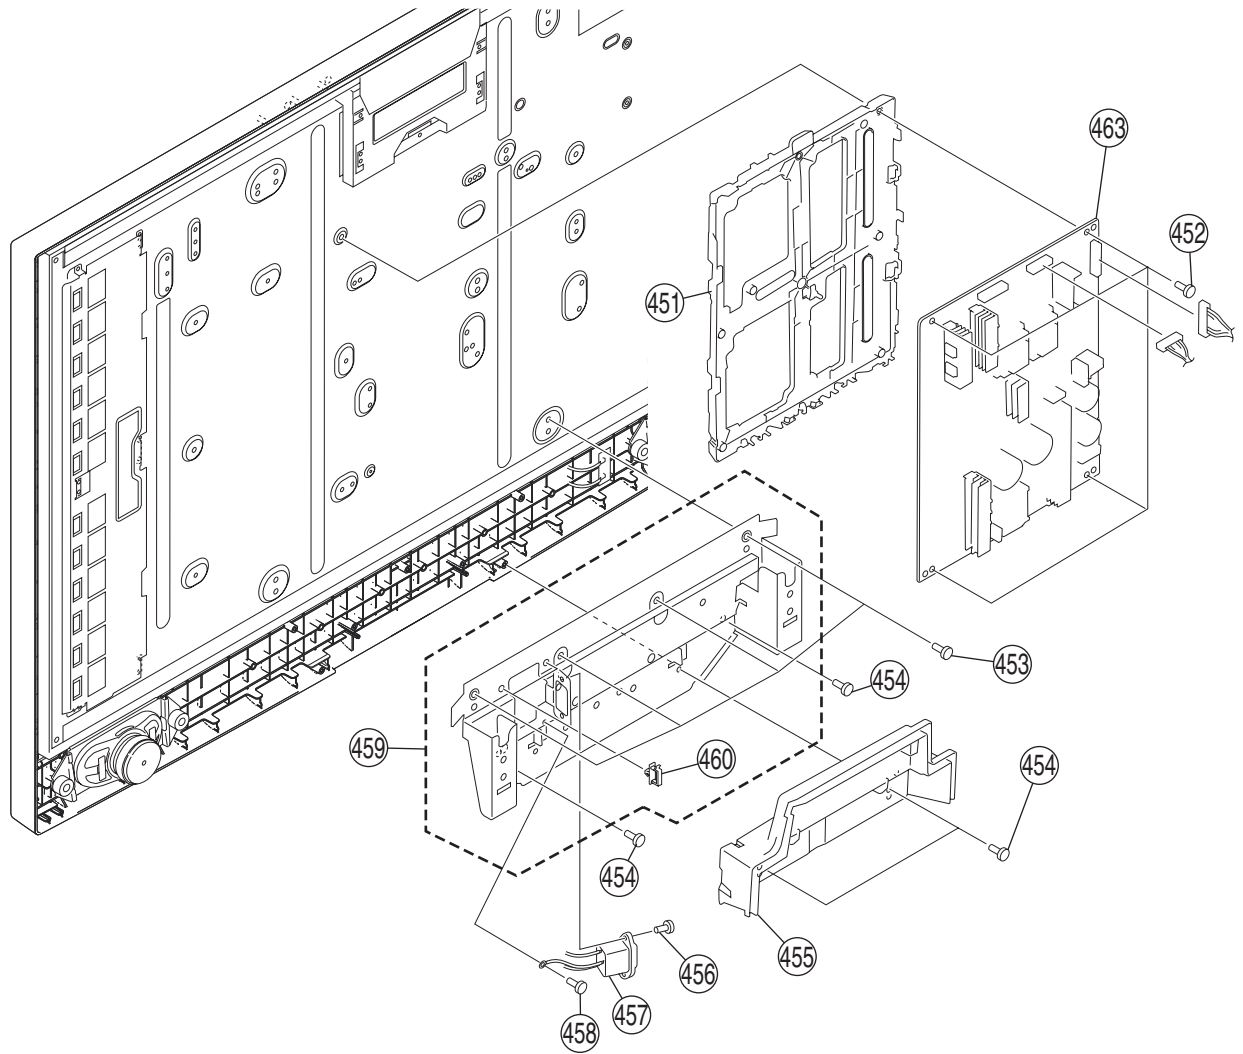

| REF. No. | PART No. | DESCRIPTIONRE | MARK | REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|--------------------|------|----------|----------------|-------------------------------|------|
| 451 | 2-664-617-01 | BRACKET, G2 | | 456 | 2-596-649-01 | +KTT 3X10 (S TYPE) | |
| 452 | 2-674-965-01 | SCREW, +PSW 3SG | | 457 | 1-819-729-14 | INLET, AC (WITH NOISE FILTER) | |
| 453 | 2-580-606-01 | SCREW, +PSW M5X8 | | 458 | 2-580-600-01 | SCREW, +PSW M4X8 | |
| 454 | 2-580-640-01 | SCREW, +BVTP2 4X16 | | 459 | X-2109-168-4 | FRAME, BOTTOM (L) ASSY | 461 |
| 455 | 2-687-624-01 | COVER, UNDER (L) | | 460 | 2-650-770-21 | SLIDE, CLAMP | |
| | | | | 461 | * A-1184-357-B | G2A MOUNT | |

KDL-40/46V2000
3-2-5. SPEAKER AND H4 BOARD

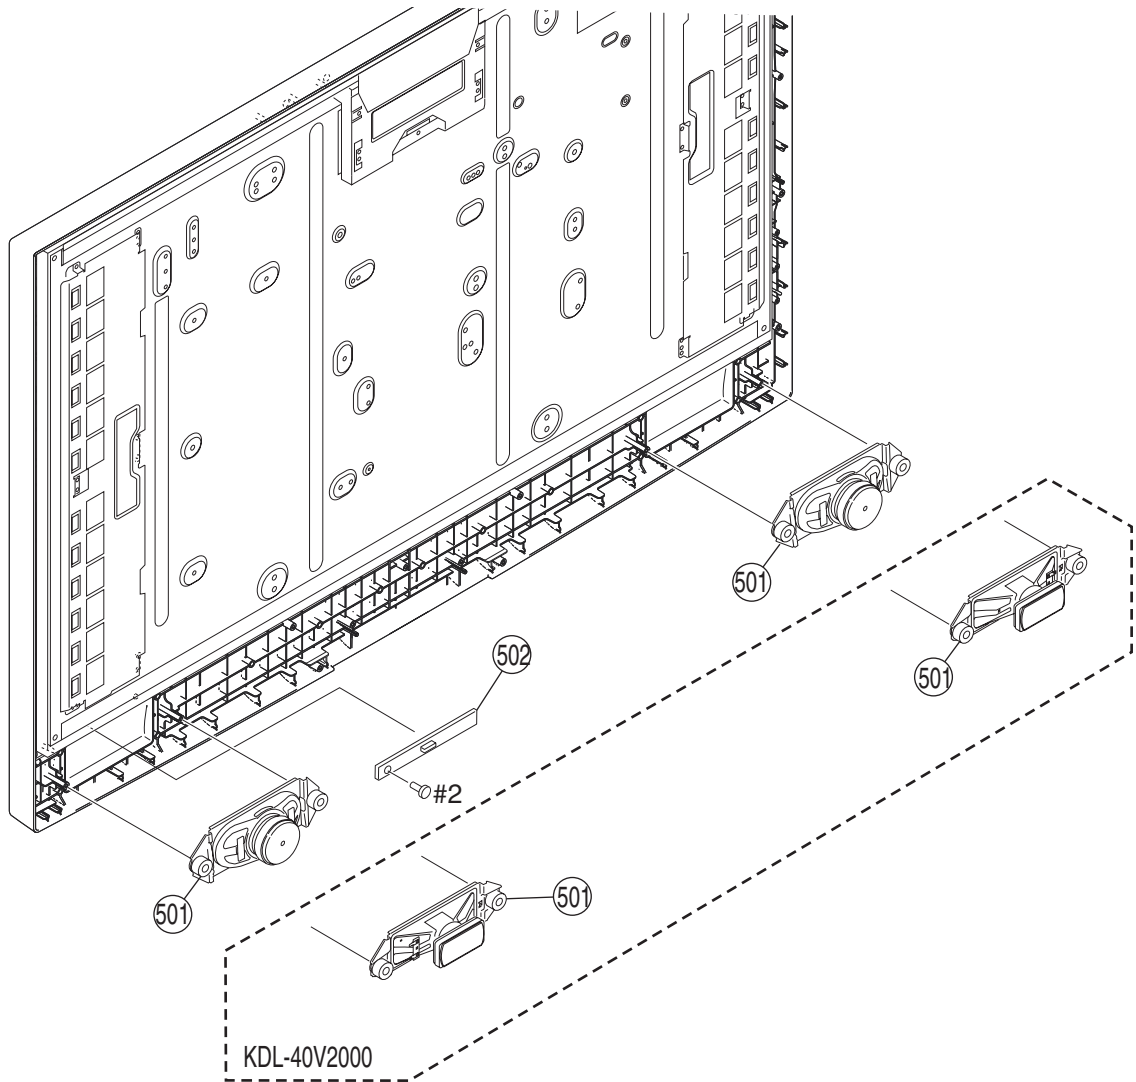


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|---|------|
| 501 | 1-826-362-11 | LOUDSPEAKER (5.5X15.5CM) (KDL-40V2000) | |
| | 1-826-435-11 | LOUDSPEAKER (13X7CM) (KDL-46V2000) | |
| 502 | A-1211-878-A | H4 MOUNT | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|-----------------------------|------|
| #2 | 7-685-647-79 | SCREW +BVTP 3X10 TYPE2 IT-3 | |

KDL-40/46V2000


3-2-6. BEZEL ASSY AND LCD PANEL

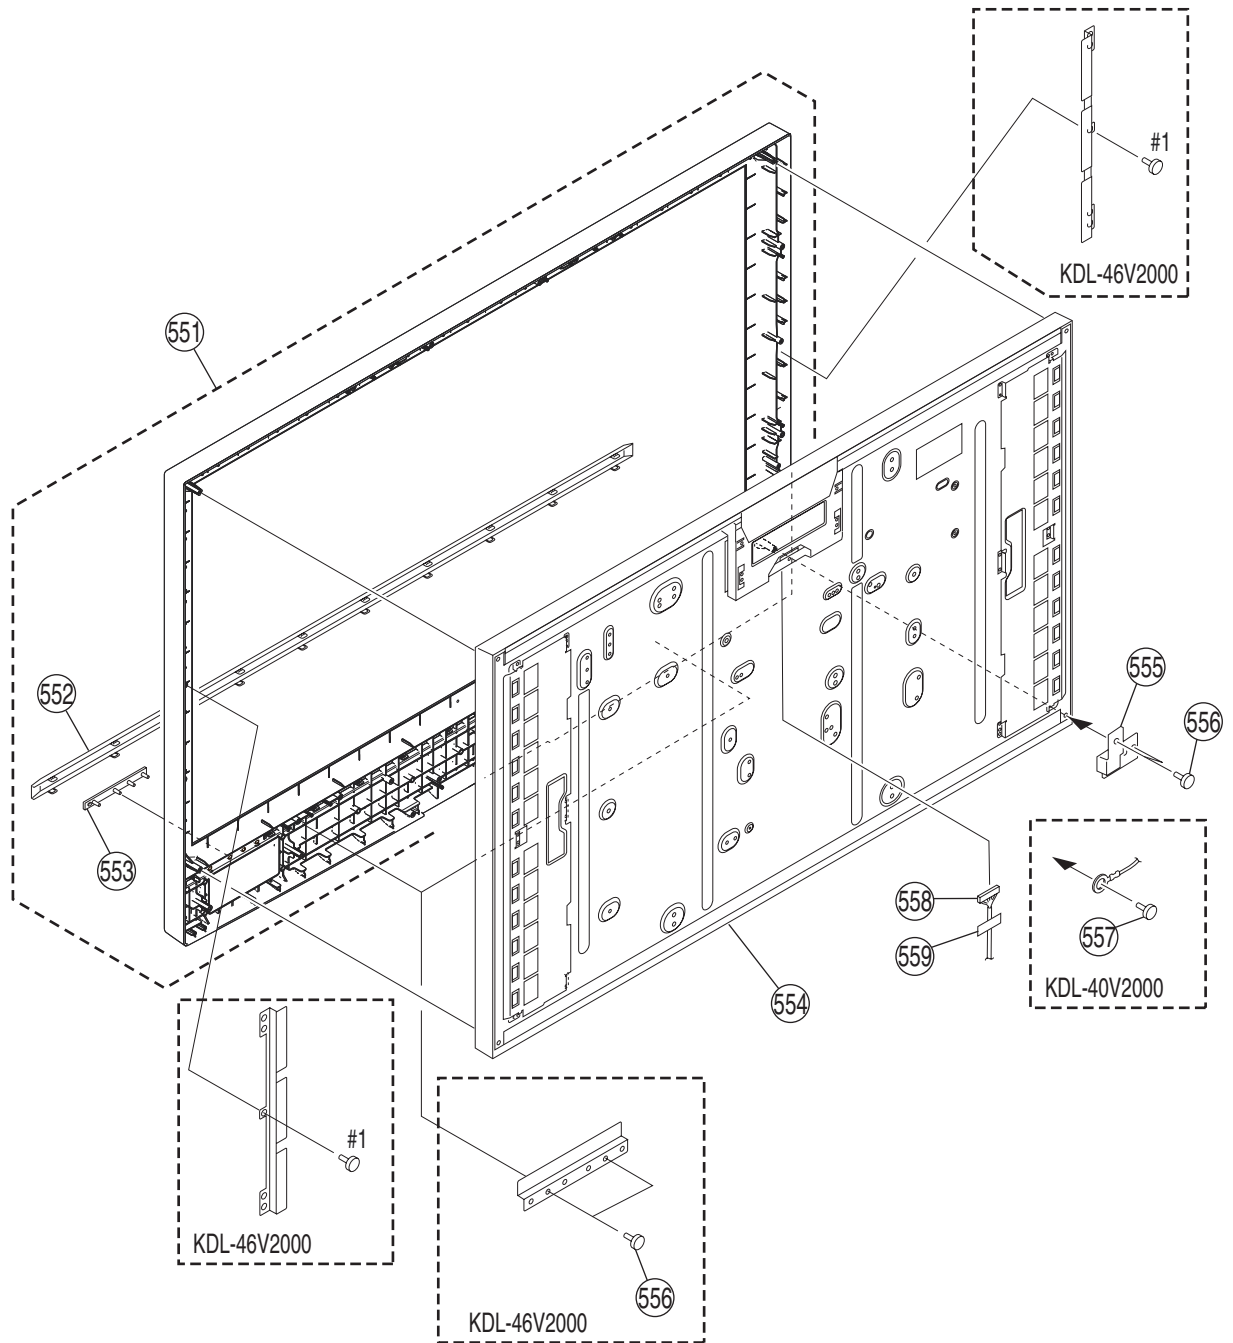

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|--|------|
| 551 | X-2109-501-1 | BEZEL (40VJ)ASSY (KDL-40V2000) | |
| | X-2109-502-4 | BEZEL (46VJ)ASSY (KDL-46V2000) | |
| 552 | 2-679-404-31 | ORNAMENTAL PANEL (40VJ) (KDL-40V2000) | |
| 552 | 2-679-405-31 | ORNAMENTAL PANEL (46VJ) (KDL-46V2000) | |
| 553 | 2-671-016-02 | GUIDE, LIGHT | |
| 554 | 1-802-133-41 | LCD PANEL (46INCH WXGA+TFT) (KDL-46V2000) | |
| | 1-802-267-11 | LCD PANEL (40INCH WXGA+TFT) (KDL-40V2000) | |
| 555 | * 2-682-132-01 | BRACKET, PANEL CORNER (KDL-46V2000) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|--------------|--|------|
| 556 | 2-580-640-01 | SCREW, +BVTP2 4X16 | |
| 557 | 2-580-591-01 | SCREW, +PSW M3X5 (KDL-40V2000) | |
| 558 | 1-832-469-12 | HARNESS WITH CONNECTOR (LVDS) (KDL-46V2000) | |
| | 1-832-470-21 | HARNESS WITH CONNECTOR (LVDS) (KDL-40V2000) | |
| 559 | 4-092-814-02 | CUSHION D (KDL-46V2000) | |
| #1 | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 | |


3-3. PACKING MATERIALS (KDL-32V2000)

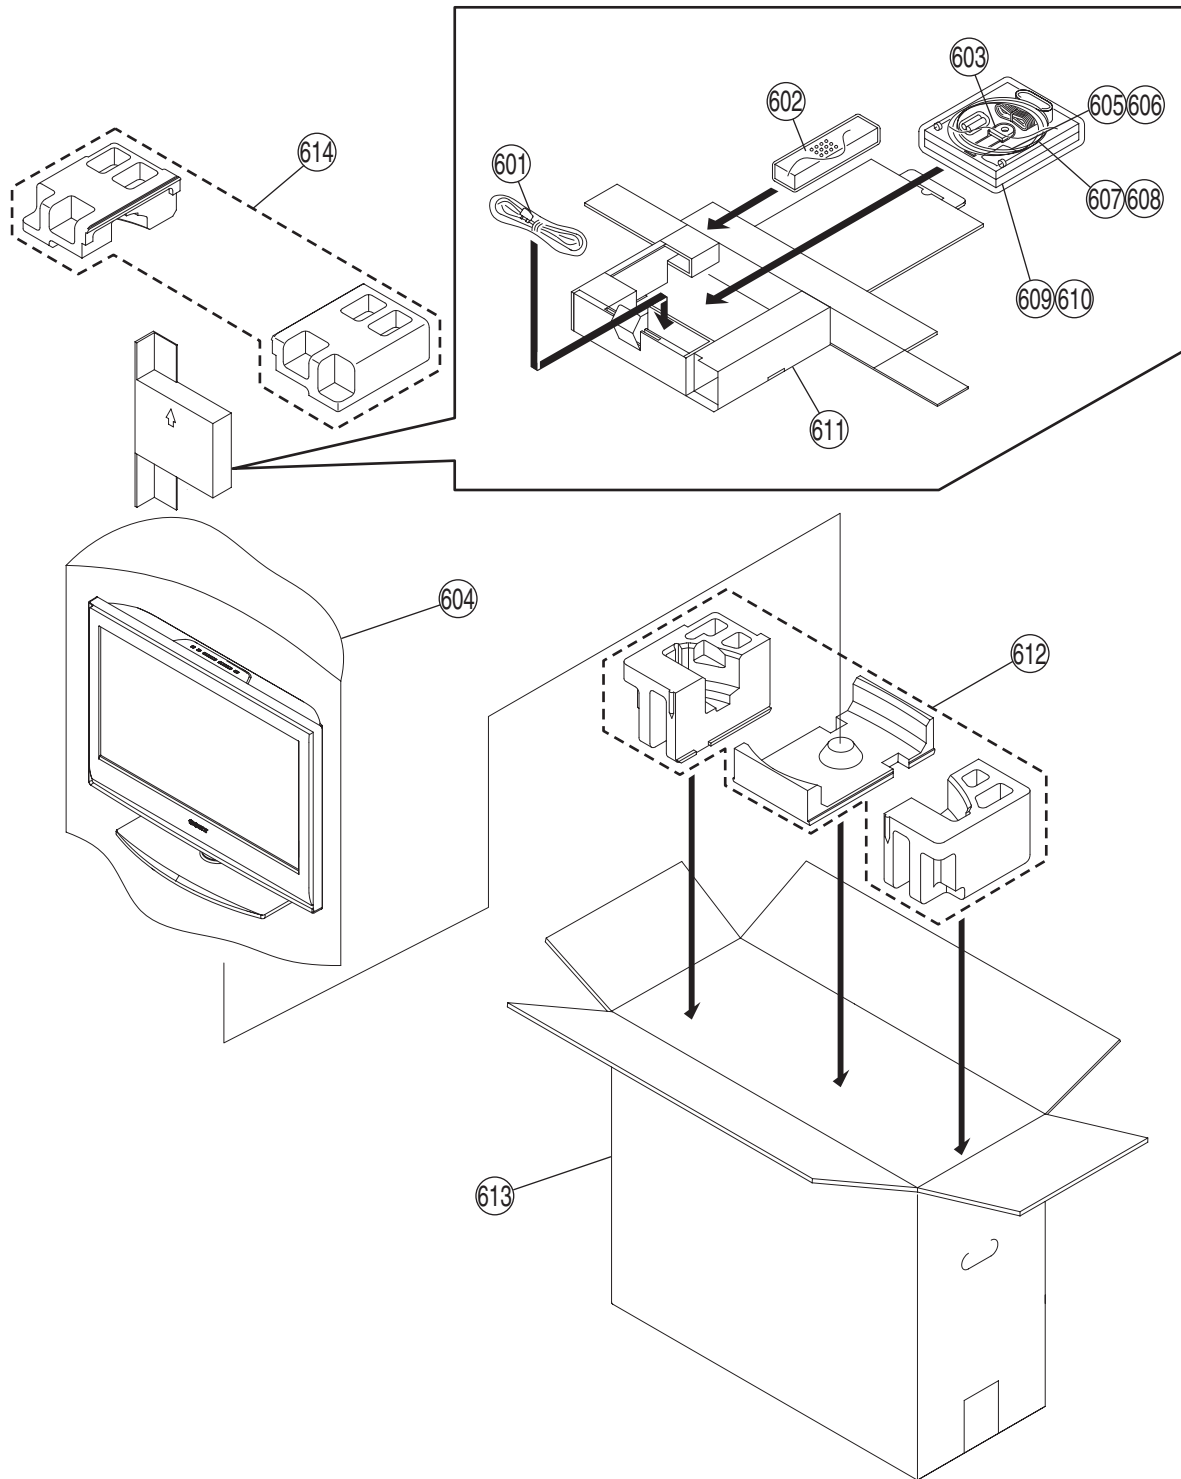

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|--------------|-------------------------------------|------|
| 601 | 1-833-177-11 | POWER-SUPPLY CORD SET | |
| 602 | 1-479-685-21 | REMOTE COMMANDER (RE-ED005) | |
| 603 | X-2102-511-2 | BAG ASSY, RUDDER LOCK | |
| 604 | 4-377-015-01 | BAG, PROTECTION | |
| 605 | 2-580-663-01 | SCREW, WOOD 3.8X20 | |
| 606 | 2-593-320-02 | SCREW, CION (M6X18) | |
| 607 | 1-769-175-21 | ANTENNA CABLE | |
| 608 | 1-831-554-11 | CABLE ASSY (15P DSUB CONNECTOR) | |
| 609 | 2-888-034-11 | MANUAL, INSTRUCTION | |
| 610 | 2-888-626-11 | MANUAL, INSTRUCTION (WALL MOUNT) | |

| REF. No. | PART No. | DESCRIPTION | MARK |
|----------|----------------|-------------------|------|
| 611 | * 2-664-322-01 | BOX, ACCESSORY | |
| 612 | * 2-664-321-01 | CUSHION (LOWER) | |
| 613 | * 2-888-549-01 | INDIVIDUAL CARTON | |
| 614 | * 2-664-320-01 | CUSHION (UPPER) | |

3-4. PACKING MATERIALS (KDL-40/46V2000)

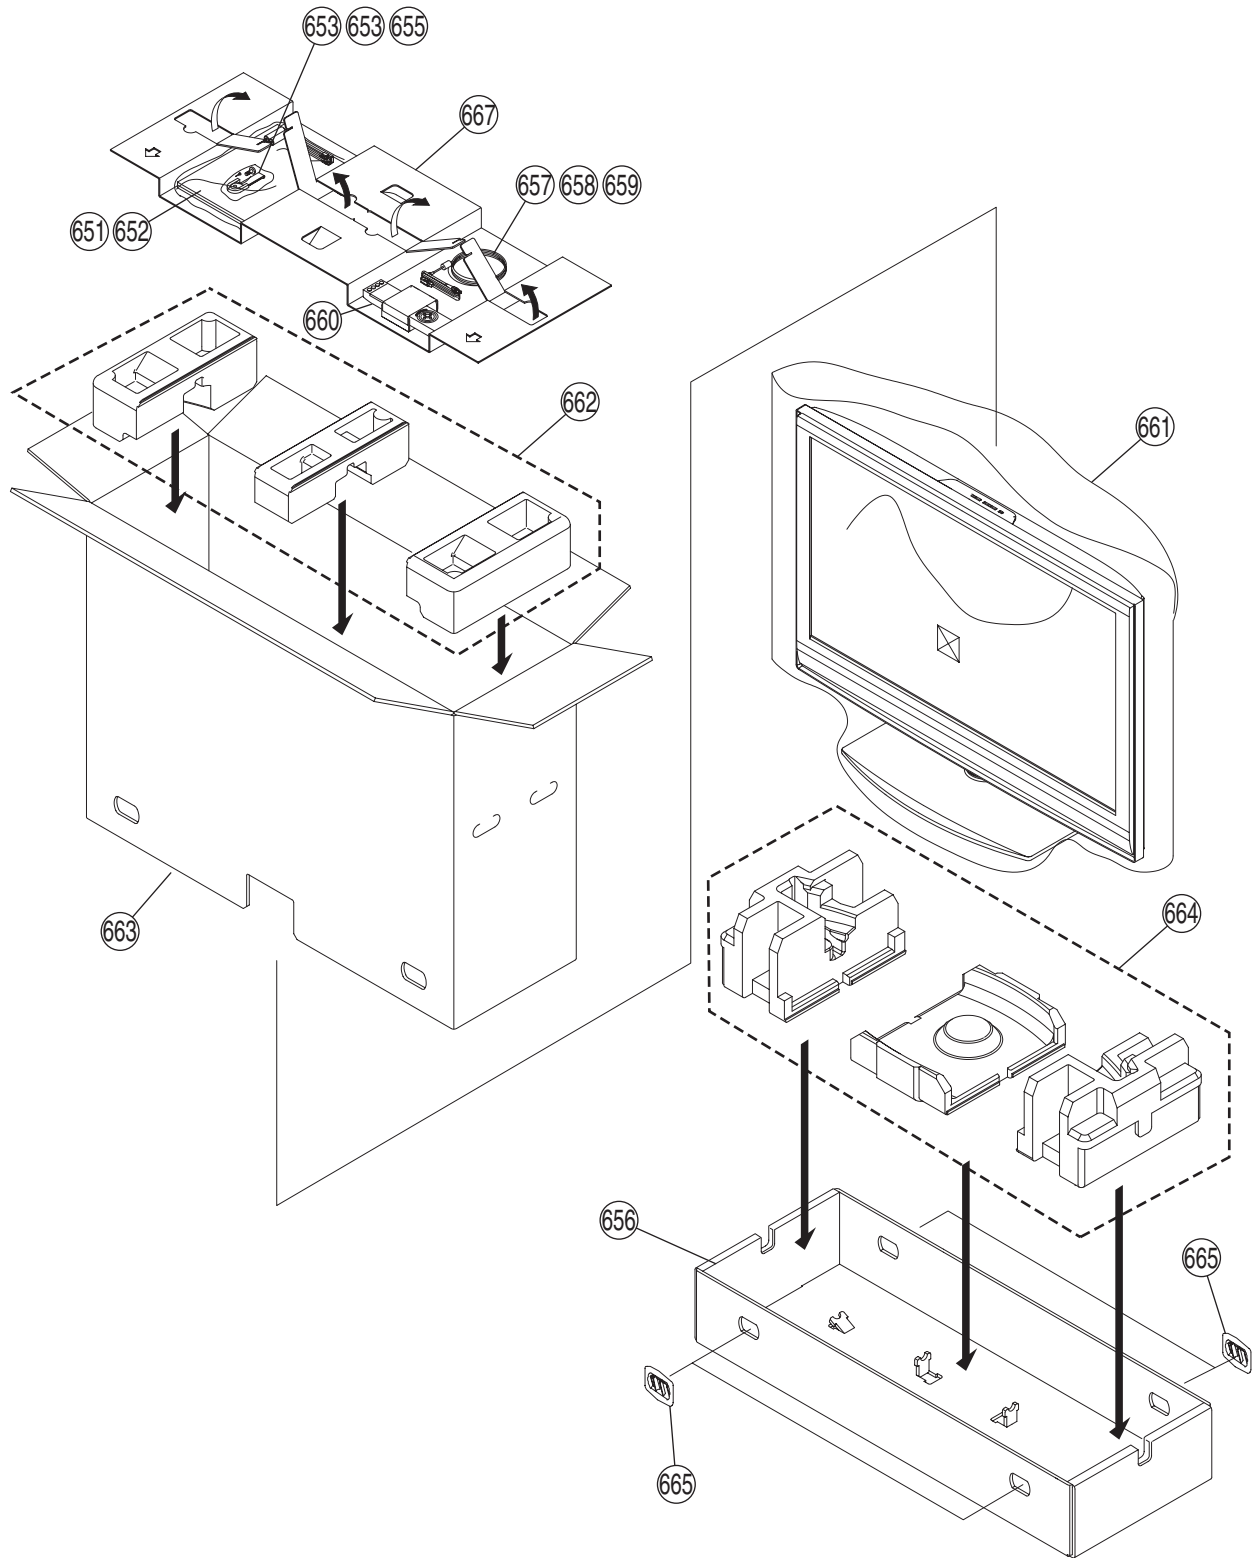


| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|----------------------------------|------|
| 651 | 2-888-034-11 | MANUAL, INSTRUCTION | |
| 652 | 2-888-03711 | MANUAL, INSTRUCTION (WALL MOUNT) | |
| 653 | X-2102-511-2 | BAG ASSY, RUDDER LOCK | |
| 654 | 2-580-663-01 | SCREW, WOOD 3.8X20 | |
| 655 | 2-593-320-02 | SCREW, CION (M6X18) | |
| 656 | * 2-663-245-01 | TRAY (KDL-40V2000) | |
| | * 2-670-489-01 | TRAY (KDL-46V2000) | |
| 657 | 1-831-554-11 | CABLE ASSY (15P DSUBCONNECTOR) | |
| 658 | 1-769-175-21 | ANTENNA CABLE | |
| 659 | 1-833-117-11 | POWER-SUPPLY CORD SET | |
| 660 | 1-479-685-21 | REMOTE COMMANDER (RM-ED005) | |

| REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|---------------------------------|------|
| 661 | 2-653-465-01 | BAG, PROTECTION (KDL-40V2000) | |
| 662 | * 2-663-102-01 | CUSHION (UPPER) (KDL-40V2000) | |
| | * 2-670-491-01 | CUSHION (UPPER) (KDL-46V2000) | |
| 663 | * 2-888-550-01 | INDIVIDUAL CARTON (KDL-40V2000) | |
| | * 2-888-551-01 | INDIVIDUAL CARTON (KDL-46V2000) | |
| 664 | * 2-663-103-01 | CUSHION (LOWER) (KDL-40V2000) | |
| | * 2-670-492-01 | CUSHION (LOWER) (KDL-46V2000) | |
| 665 | 3-674-673-01 | STOPPER (A) | |


SECTION 4

ELECTRICAL PARTS LIST

NOTE:

The components identified  marked are critical for safety.
Replace only with the part number specified.


When indicating parts by reference number,
please include the board name.




Note: The components identified by mark  contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

RESISTORS

- All resistors are in ohms
- F : nonflammable

Note: The components identified by mark  contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

| No. | # | Board | Type | Δ/μ^* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|---|----------|--------------|----------------------------------|-----------|-----------|
| | | B | |  | | A-1203-529-A | B MOUNT | 32V2000 | |
| | | B | |  | | A-1203-528-A | B MOUNT | 40V2000 | |
| | | B | |  | | A-1203-527-A | B MOUNT | 46V2000 | |
| 1 | | B | CAPACITOR | | C1001 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 2 | | B | CAPACITOR | | C1003 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 3 | | B | CAPACITOR | | C1004 | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V | | |
| 4 | | B | CAPACITOR | | C1005 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 5 | | B | CAPACITOR | | C1006 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 6 | | B | CAPACITOR | | C1007 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 7 | | B | CAPACITOR | | C1010 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 8 | | B | CAPACITOR | | C1011 | 1-126-206-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 9 | | B | CAPACITOR | | C1012 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 10 | | B | CAPACITOR | | C1015 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 11 | | B | CAPACITOR | | C1016 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 12 | | B | CAPACITOR | | C1017 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 13 | | B | CAPACITOR | | C1018 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 14 | | B | CAPACITOR | | C1019 | 1-162-912-11 | CERAMIC CHIP 7PF 0.50PF 50V | | |
| 15 | | B | CAPACITOR | | C1022 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 16 | | B | CAPACITOR | | C1023 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 17 | | B | CAPACITOR | | C1024 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 18 | | B | CAPACITOR | | C1027 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 19 | | B | CAPACITOR | | C1029 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 20 | | B | CAPACITOR | | C1033 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 21 | | B | CAPACITOR | | C1035 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 22 | | B | CAPACITOR | | C1036 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 23 | | B | CAPACITOR | | C1044 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 24 | | B | CAPACITOR | | C1046 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 25 | | B | CAPACITOR | | C1047 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 26 | | B | CAPACITOR | | C1048 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 27 | | B | CAPACITOR | | C1049 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 28 | | B | CAPACITOR | | C1050 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 29 | | B | CAPACITOR | | C1051 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 30 | | B | CAPACITOR | | C1052 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 31 | | B | CAPACITOR | | C1053 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 32 | | B | CAPACITOR | | C1054 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 33 | | B | CAPACITOR | | C1056 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 34 | | B | CAPACITOR | | C1057 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 35 | | B | CAPACITOR | | C1060 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 36 | | B | CAPACITOR | | C1061 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 37 | | B | CAPACITOR | | C1062 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 38 | | B | CAPACITOR | | C1063 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 39 | | B | CAPACITOR | | C1066 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 40 | | B | CAPACITOR | | C1067 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 41 | | B | CAPACITOR | | C1068 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 42 | | B | CAPACITOR | | C1069 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 43 | | B | CAPACITOR | | C1070 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 44 | | B | CAPACITOR | | C1071 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 45 | | B | CAPACITOR | | C1072 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 46 | | B | CAPACITOR | | C1073 | 1-126-390-11 | ELECT CHIP 22UF 20.00% 6.3V | | |
| 47 | | B | CAPACITOR | | C1074 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 48 | | B | CAPACITOR | | C1075 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 49 | | B | CAPACITOR | | C1076 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 50 | | B | CAPACITOR | | C1079 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 51 | | B | CAPACITOR | | C1080 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 52 | | B | CAPACITOR | | C1081 | 1-126-391-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 53 | | B | CAPACITOR | | C1082 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 54 | | B | CAPACITOR | | C1083 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 55 | | B | CAPACITOR | | C1084 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 56 | | B | CAPACITOR | | C1085 | 1-115-456-21 | DOUBLE LAYER 0.22F 5.5V | | |
| 57 | | B | CAPACITOR | | C1087 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 58 | | B | CAPACITOR | | C1091 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 59 | | B | CAPACITOR | | C1092 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 60 | | B | CAPACITOR | | C1093 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 61 | | B | CAPACITOR | | C1094 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 62 | | B | CAPACITOR | | C1100 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 63 | | B | CAPACITOR | | C1110 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 64 | | B | CAPACITOR | | C1701 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 65 | | B | CAPACITOR | | C1704 | 1-100-831-91 | CERAMIC CHIP 0.001UF 2% 50V | | |
| 66 | | B | CAPACITOR | | C1706 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |

| No. | # | Board | Type | Δ / [*] | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|-------------------------|----------|--------------|----------------------------------|-----------|-----------|
| 67 | | B | CAPACITOR | | C1707 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 68 | | B | CAPACITOR | | C1708 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 69 | | B | CAPACITOR | | C1710 | 1-100-831-91 | CERAMIC CHIP 0.001UF 2% 50V | | |
| 70 | | B | CAPACITOR | | C1711 | 1-100-831-91 | CERAMIC CHIP 0.001UF 2% 50V | | |
| 71 | | B | CAPACITOR | | C1712 | 1-100-162-91 | CERAMIC CHIP 1UF 50V | | |
| 72 | | B | CAPACITOR | | C5000 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 73 | | B | CAPACITOR | | C5002 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 74 | | B | CAPACITOR | | C5003 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 75 | | B | CAPACITOR | | C5005 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 76 | | B | CAPACITOR | | C5006 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 77 | | B | CAPACITOR | | C5007 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 78 | | B | CAPACITOR | | C5009 | 1-162-905-11 | CERAMIC CHIP 1PF 0.25PF 50V | | |
| 79 | | B | CAPACITOR | | C5010 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 80 | | B | CAPACITOR | | C5011 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 81 | | B | CAPACITOR | | C5012 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 82 | | B | CAPACITOR | | C5013 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 83 | | B | CAPACITOR | | C5014 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 84 | | B | CAPACITOR | | C5015 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 85 | | B | CAPACITOR | | C5016 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 86 | | B | CAPACITOR | | C5017 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 87 | | B | CAPACITOR | | C5018 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 88 | | B | CAPACITOR | | C5019 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 89 | | B | CAPACITOR | | C5020 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 90 | | B | CAPACITOR | | C5021 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 91 | | B | CAPACITOR | | C5022 | 1-162-905-11 | CERAMIC CHIP 1PF 0.25PF 50V | | |
| 92 | | B | CAPACITOR | | C5023 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 93 | | B | CAPACITOR | | C5024 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 94 | | B | CAPACITOR | | C5025 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 95 | | B | CAPACITOR | | C5027 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 96 | | B | CAPACITOR | | C5028 | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V | | |
| 97 | | B | CAPACITOR | | C5032 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 98 | | B | CAPACITOR | | C5033 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 99 | | B | CAPACITOR | | C5201 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 100 | | B | CAPACITOR | | C5202 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 101 | | B | CAPACITOR | | C5204 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 102 | | B | CAPACITOR | | C5205 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 103 | | B | CAPACITOR | | C5208 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 104 | | B | CAPACITOR | | C5209 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 105 | | B | CAPACITOR | | C5211 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 106 | | B | CAPACITOR | | C5212 | 1-162-979-11 | CERAMIC CHIP 0.0027UF 10.00% 50V | | |
| 107 | | B | CAPACITOR | | C5213 | 1-162-979-11 | CERAMIC CHIP 0.0027UF 10.00% 50V | | |
| 108 | | B | CAPACITOR | | C5216 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 109 | | B | CAPACITOR | | C5217 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 110 | | B | CAPACITOR | | C5218 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 111 | | B | CAPACITOR | | C5219 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 112 | | B | CAPACITOR | | C5220 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 113 | | B | CAPACITOR | | C5221 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 114 | | B | CAPACITOR | | C5222 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 115 | | B | CAPACITOR | | C5224 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 116 | | B | CAPACITOR | | C5225 | 1-162-960-11 | CERAMIC CHIP 220PF 10.00% 50V | | |
| 117 | | B | CAPACITOR | | C5226 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 118 | | B | CAPACITOR | | C5230 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 119 | | B | CAPACITOR | | C5231 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 120 | | B | CAPACITOR | | C5234 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 121 | | B | CAPACITOR | | C5236 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 122 | | B | CAPACITOR | | C5237 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 123 | | B | CAPACITOR | | C5239 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 124 | | B | CAPACITOR | | C5240 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 125 | | B | CAPACITOR | | C5241 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 126 | | B | CAPACITOR | | C5246 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 127 | | B | CAPACITOR | | C5250 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 128 | | B | CAPACITOR | | C5252 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 129 | | B | CAPACITOR | | C5253 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 130 | | B | CAPACITOR | | C5254 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 131 | | B | CAPACITOR | | C5255 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 132 | | B | CAPACITOR | | C5256 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 133 | | B | CAPACITOR | | C5257 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 134 | | B | CAPACITOR | | C5258 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 135 | | B | CAPACITOR | | C5259 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 136 | | B | CAPACITOR | | C5260 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 137 | | B | CAPACITOR | | C5262 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 138 | | B | CAPACITOR | | C5265 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 139 | | B | CAPACITOR | | C5269 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 140 | | B | CAPACITOR | | C5270 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |

| No. | # | Board | Type | Δ/V^* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|----------------------------------|-----------|-----------|
| 141 | | B | CAPACITOR | | C5271 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 142 | | B | CAPACITOR | | C5273 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 143 | | B | CAPACITOR | | C5274 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 144 | | B | CAPACITOR | | C5278 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 145 | | B | CAPACITOR | | C5279 | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V | | |
| 146 | | B | CAPACITOR | | C5280 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 147 | | B | CAPACITOR | | C5281 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 148 | | B | CAPACITOR | | C5502 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 149 | | B | CAPACITOR | | C5503 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 150 | | B | CAPACITOR | | C5504 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 151 | | B | CAPACITOR | | C5506 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 152 | | B | CAPACITOR | | C5507 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 153 | | B | CAPACITOR | | C5508 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 154 | | B | CAPACITOR | | C5510 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 155 | | B | CAPACITOR | | C5512 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 156 | | B | CAPACITOR | | C5513 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 157 | | B | CAPACITOR | | C5514 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 158 | | B | CAPACITOR | | C6002 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 159 | | B | CAPACITOR | | C6003 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 160 | | B | CAPACITOR | | C6004 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 161 | | B | CAPACITOR | | C6005 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 162 | | B | CAPACITOR | | C6006 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 163 | | B | CAPACITOR | | C6008 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 164 | | B | CAPACITOR | | C6009 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 165 | | B | CAPACITOR | | C6012 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 166 | | B | CAPACITOR | | C6013 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 167 | | B | CAPACITOR | | C6014 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 168 | | B | CAPACITOR | | C7000 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 169 | | B | CAPACITOR | | C7001 | 1-112-064-11 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 170 | | B | CAPACITOR | | C7002 | 1-112-064-11 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 171 | | B | CAPACITOR | | C7003 | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V | | |
| 172 | | B | CAPACITOR | | C7004 | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V | | |
| 173 | | B | CAPACITOR | | C7005 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 174 | | B | CAPACITOR | | C7006 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 175 | | B | CAPACITOR | | C7007 | 1-100-552-21 | ELECT CHIP 10UF 20% 25V | | |
| 176 | | B | CAPACITOR | | C7008 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 177 | | B | CAPACITOR | | C7009 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 178 | | B | CAPACITOR | | C7010 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 179 | | B | CAPACITOR | | C7011 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 180 | | B | CAPACITOR | | C7012 | 1-110-648-11 | ELECT CHIP 220UF 20.00% 25V | | |
| 181 | | B | CAPACITOR | | C7013 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 182 | | B | CAPACITOR | | C7014 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 183 | | B | CAPACITOR | | C7015 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 184 | | B | CAPACITOR | | C7016 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 185 | | B | CAPACITOR | | C7017 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 186 | | B | CAPACITOR | | C7023 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 187 | | B | CAPACITOR | | C7025 | 1-125-827-91 | CERAMIC CHIP 1UF 10.00% 25V | | |
| 188 | | B | CAPACITOR | | C7026 | 1-125-827-91 | CERAMIC CHIP 1UF 10.00% 25V | | |
| 189 | | B | CAPACITOR | | C7027 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 190 | | B | CAPACITOR | | C7028 | 1-112-794-11 | ELECT CHIP 470UF 20% 16V | | |
| 191 | | B | CAPACITOR | | C7030 | 1-112-794-11 | ELECT CHIP 470UF 20% 16V | | |
| 192 | | B | CAPACITOR | | C7031 | 1-165-673-21 | ELECT CHIP 56UF 20% 10V | | |
| 193 | | B | CAPACITOR | | C7032 | 1-165-673-21 | ELECT CHIP 56UF 20% 10V | | |
| 194 | | B | CAPACITOR | | C7034 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 195 | | B | CAPACITOR | | C7035 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 196 | | B | CAPACITOR | | C7036 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 197 | | B | CAPACITOR | | C7037 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 198 | | B | CAPACITOR | | C7040 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 199 | | B | CAPACITOR | | C7041 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 200 | | B | CAPACITOR | | C7042 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 201 | | B | CAPACITOR | | C7045 | 1-131-661-21 | ELECT CHIP 100UF 20% 10V | | |
| 202 | | B | CAPACITOR | | C7047 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 203 | | B | CAPACITOR | | C7051 | 1-135-595-11 | ELECT CHIP 100UF 20% 6.3V | | |
| 204 | | B | CAPACITOR | | C7052 | 1-165-673-21 | ELECT CHIP 56UF 20% 10V | | |
| 205 | | B | CAPACITOR | | C7054 | 1-100-597-91 | CERAMIC CHIP 0.1UF 10% 25V | | |
| 206 | | B | CAPACITOR | | C7056 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 207 | | B | CAPACITOR | | C7057 | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V | | |
| 208 | | B | CAPACITOR | | C7058 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 209 | | B | CAPACITOR | | C7100 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 210 | | B | CAPACITOR | | C7101 | 1-110-648-11 | ELECT CHIP 220UF 20.00% 25V | | |
| 211 | | B | CAPACITOR | | C7525 | 1-164-937-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 212 | | B | CAPACITOR | | C7545 | 1-164-937-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 213 | | B | CAPACITOR | | C9002 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 214 | | B | CAPACITOR | | C9003 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |

| No. | # | Board | Type | △/△* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|------|----------|--------------|---------------------------------|-----------|-----------|
| 215 | | B | CAPACITOR | | C9005 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 216 | | B | CAPACITOR | | C9007 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 217 | | B | CAPACITOR | | C9008 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 218 | | B | CAPACITOR | | C9009 | 1-100-567-81 | CERAMIC CHIP 10000PF 10% 25V | | |
| 219 | | B | CAPACITOR | | C9011 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 220 | | B | CAPACITOR | | C9012 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 221 | | B | CAPACITOR | | C9013 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 222 | | B | CAPACITOR | | C9014 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 223 | | B | CAPACITOR | | C9030 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 224 | | B | CAPACITOR | | C9031 | 1-164-937-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 225 | | B | CAPACITOR | | C9032 | 1-164-937-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 226 | | B | CAPACITOR | | C9033 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 227 | | B | CAPACITOR | | C9034 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 228 | | B | CAPACITOR | | C9035 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 229 | | B | CAPACITOR | | C9036 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 230 | | B | CAPACITOR | | C9037 | 1-112-064-11 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 231 | | B | CAPACITOR | | C9038 | 1-112-064-11 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 232 | | B | CAPACITOR | | C9039 | 1-115-412-11 | CERAMIC CHIP 680PF 5.00% 25V | | |
| 233 | | B | CAPACITOR | | C9040 | 1-115-412-11 | CERAMIC CHIP 680PF 5.00% 25V | | |
| 234 | | B | CAPACITOR | | C9042 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 235 | | B | CONNECTOR | | CN1001 | 1-819-390-51 | FFC/FPC CONNECTOR (ZIF) 49P | | |
| 236 | | B | CONNECTOR | | CN1002 | 1-819-447-11 | HEADER ASSEMBLY FOR PWB 10P | | |
| 237 | | B | CONNECTOR | | CN1003 | 1-779-331-51 | CONNECTOR, FFC/FPC 14P | | |
| 238 | | B | CONNECTOR | | CN1004 | 1-779-936-51 | CONNECTOR, FFC/FPC 18P | | |
| 239 | | B | CONNECTOR | | CN1007 | 1-819-336-11 | HEADER ASSEMBLY FOR PWB 3P | | |
| 240 | | B | CONNECTOR | | CN1008 | 1-820-187-11 | HEADER ASSEMBLY (PRINT PWB)10P | | |
| 241 | | B | CONNECTOR | | CN1700 | 1-820-187-11 | HEADER ASSEMBLY (PRINT PWB)10P | | |
| 242 | | B | CONNECTOR | * | CN1701 | 1-820-189-11 | HEADER ASSEMBLY (PRINT PWB)12P | | |
| 243 | | B | CONNECTOR | | CN4700 | 1-820-255-51 | FFC/FPC CONNECTOR (ZIF) 20P | | |
| 244 | | B | CONNECTOR | * | CN5000 | 1-820-235-11 | HEADER ASSEMBLY 30P | | |
| 245 | | B | CONNECTOR | | CN6000 | 1-818-937-11 | D SUB CONNECTOR 15P | | |
| 246 | | B | CONNECTOR | | CN7002 | 1-780-336-11 | EARTH TERMINAL | | |
| 247 | | B | CONNECTOR | | CN7003 | 1-780-336-11 | EARTH TERMINAL | | |
| 248 | | B | CONNECTOR | | CN7004 | 1-780-336-11 | EARTH TERMINAL | | |
| 249 | | B | CONNECTOR | | CN7005 | 1-780-336-11 | EARTH TERMINAL | | |
| 250 | | B | CONNECTOR | | CN7008 | 1-820-186-11 | HEADER ASSEMBLY (PRINT PWB) 9P | | |
| 251 | | B | CONNECTOR | | CN7009 | 1-820-184-11 | HEADER ASSEMBLY (PRINT PWB) 7P | | |
| 252 | | B | CONNECTOR | | CN9000 | 1-818-737-11 | HDMI CONNECTOR | | |
| 253 | | B | DIODE | | D1002 | 8-719-058-24 | DIODE RB501V-40TE-17 | | |
| 254 | | B | DIODE | | D1006 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 255 | | B | DIODE | | D1007 | 8-719-077-59 | DIODE 1PS302 | | |
| 256 | | B | DIODE | | D1020 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 257 | | B | DIODE | | D1021 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 258 | | B | DIODE | | D1701 | 8-719-064-03 | DIODE HZU16B2TRF-E | | |
| 259 | | B | DIODE | | D1702 | 8-719-064-03 | DIODE HZU16B2TRF-E | | |
| 260 | | B | DIODE | | D6000 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 261 | | B | DIODE | | D6001 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 262 | | B | DIODE | | D6002 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 263 | | B | DIODE | | D6003 | 8-719-050-38 | DIODE M1MA152WK-T1 | | |
| 264 | | B | DIODE | | D7000 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 265 | | B | DIODE | | D7001 | 6-501-336-01 | DIODE RSX201L-30TE25 | | |
| 266 | | B | DIODE | | D7003 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 267 | | B | DIODE | | D7004 | 8-719-072-43 | DIODE RB050L-40TE25 | | |
| 268 | | B | DIODE | | D7005 | 8-719-072-43 | DIODE RB050L-40TE25 | | |
| 269 | | B | DIODE | | D7006 | 6-501-336-01 | DIODE RSX201L-30TE25 | | |
| 270 | | B | DIODE | | D7008 | 6-500-579-01 | DIODE PTZ-TE25-6.8B | | |
| 271 | | B | DIODE | | D7009 | 8-719-073-69 | DIODE PTZ-TE25-6.2A | | |
| 272 | | B | DIODE | | D7010 | 8-719-056-83 | DIODE UDZ-TE-17-6.8B | | |
| 273 | | B | DIODE | | D7014 | 8-719-056-83 | DIODE UDZ-TE-17-6.8B | | |
| 274 | | B | DIODE | | D7500 | 8-719-056-84 | DIODE UDZ-TE-17-7.5B | | |
| 275 | | B | DIODE | | D7508 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 276 | | B | DIODE | | D7509 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 277 | | B | DIODE | | D7510 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 278 | | B | DIODE | | D9004 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 279 | | B | DIODE | | D9013 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 280 | | B | DIODE | | D9014 | 8-719-050-37 | DIODE M1MA152WA-T1 | | |
| 281 | | B | DIODE | | D9015 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 282 | | B | FUSE | △ | F7000 | 1-576-603-21 | FUSE 3.15A 24V | | |
| 283 | | B | FERRITE BEAD | | FB1001 | 1-414-227-11 | FERRITE 0UH | | |
| 284 | | B | FERRITE BEAD | | FB1002 | 1-400-110-21 | FERRITE 0UH | | |
| 285 | | B | FERRITE BEAD | | FB1003 | 1-414-227-11 | FERRITE 0UH | | |
| 286 | | B | FERRITE BEAD | | FB1004 | 1-400-110-21 | FERRITE 0UH | | |
| 287 | | B | FERRITE BEAD | | FB1005 | 1-400-110-21 | FERRITE 0UH | | |
| 288 | | B | FERRITE BEAD | | FB1006 | 1-400-110-21 | FERRITE 0UH | | |

| No. | # | Board | Type | △/△* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|------|----------|--------------|------------------------------|-----------|-----------|
| 289 | | B | FERRITE BEAD | | FB1007 | 1-400-110-21 | FERRITE 0UH | | |
| 290 | | B | FERRITE BEAD | | FB1711 | 1-500-113-22 | FERRITE 0UH | | |
| 291 | | B | FERRITE BEAD | | FB1712 | 1-400-110-21 | FERRITE 0UH | | |
| 292 | | B | FERRITE BEAD | | FB1713 | 1-400-110-21 | FERRITE 0UH | | |
| 293 | | B | FERRITE BEAD | | FB1715 | 1-400-110-21 | FERRITE 0UH | | |
| 294 | | B | FERRITE BEAD | | FB1720 | 1-400-141-22 | FERRITE 0UH | | |
| 295 | | B | FERRITE BEAD | | FB1721 | 1-400-141-22 | FERRITE 0UH | | |
| 296 | | B | FERRITE BEAD | | FB4701 | 1-400-851-11 | FERRITE 0UH | | |
| 297 | | B | FERRITE BEAD | | FB5201 | 1-400-794-21 | FERRITE 0UH | | |
| 298 | | B | FERRITE BEAD | | FB6000 | 1-469-100-21 | FERRITE 0UH | | |
| 299 | | B | FERRITE BEAD | | FB6001 | 1-469-100-21 | FERRITE 0UH | | |
| 300 | | B | FERRITE BEAD | | FB6002 | 1-469-100-21 | FERRITE 0UH | | |
| 301 | | B | FERRITE BEAD | | FB6004 | 1-469-100-21 | FERRITE 0UH | | |
| 302 | | B | FERRITE BEAD | | FB6005 | 1-400-141-22 | FERRITE 0UH | | |
| 303 | | B | FERRITE BEAD | | FB7001 | 1-414-445-11 | FERRITE 0UH | | |
| 304 | | B | FERRITE BEAD | | FB7002 | 1-414-445-11 | FERRITE 0UH | | |
| 305 | | B | FERRITE BEAD | | FB7003 | 1-414-445-11 | FERRITE 0UH | | |
| 306 | | B | FERRITE BEAD | | FB7005 | 1-400-110-21 | FERRITE 0UH | | |
| 307 | | B | FERRITE BEAD | | FB7006 | 1-400-110-21 | FERRITE 0UH | | |
| 308 | | B | FERRITE BEAD | | FB7007 | 1-400-110-21 | FERRITE 0UH | | |
| 309 | | B | FERRITE BEAD | | FB7008 | 1-400-110-21 | FERRITE 0UH | | |
| 310 | | B | FERRITE BEAD | | FB7011 | 1-400-794-21 | FERRITE 0UH | | |
| 311 | | B | FERRITE BEAD | | FB9000 | 1-469-094-21 | FERRITE 0UH | | |
| 312 | | B | FILTER | | FL1001 | 1-234-177-21 | FERRITE 0UH | | |
| 313 | | B | FILTER | | FL5201 | 1-234-177-21 | FERRITE 0UH | | |
| 314 | | B | FILTER | | FL5203 | 1-234-177-21 | FERRITE 0UH | | |
| 315 | | B | FILTER | | FL5206 | 1-234-177-21 | FERRITE 0UH | | |
| 316 | | B | FILTER | | FL5207 | 1-234-177-21 | FERRITE 0UH | | |
| 317 | | B | FILTER | | FL5500 | 1-234-177-21 | FERRITE 0UH | | |
| 318 | | B | FILTER | | FL5501 | 1-234-177-21 | FERRITE 0UH | | |
| 319 | | B | FILTER | | FL9000 | 1-234-177-21 | FERRITE 0UH | | |
| 320 | | B | FILTER | | FL9001 | 1-234-177-21 | FERRITE 0UH | | |
| 321 | | B | IC | | IC1001 | 6-708-219-01 | IC MB91305PMC-G-BNDE1 | | |
| 322 | | B | IC | | IC1002 | 6-806-969-01 | IC S29AL016D70TFI010-WAX2AU1 | | |
| 323 | | B | IC | | IC1004 | 6-703-175-01 | IC PST3629UL | | |
| 324 | | B | IC | | IC1005 | 6-710-121-01 | IC M24256-BWMN6TP(A) | | |
| 325 | | B | IC | | IC1006 | 6-709-512-01 | IC S-1132B18-M5T1G | | |
| 326 | | B | IC | | IC1007 | 6-706-815-01 | IC TMP75AIDR | | |
| 327 | | B | IC | | IC1008 | 8-759-549-03 | IC SN74LV132APWR | | |
| 328 | | B | IC | | IC1009 | 6-709-517-01 | IC S-35390A-J8T1G | | |
| 329 | | B | IC | | IC1010 | 8-759-460-79 | IC BA09FP-E2 | | |
| 330 | | B | IC | | IC5201 | 8-759-651-59 | IC SN74CBTLV3245APWR | | |
| 331 | | B | IC | | IC5202 | 8-759-651-59 | IC SN74CBTLV3245APWR | | |
| 332 | | B | IC | | IC5203 | 6-706-491-01 | IC TC7SH86FU(T5RSOYJF) | | |
| 333 | | B | IC | | IC5500 | 6-707-822-01 | IC EM6A9320BI-5MG | | |
| 334 | | B | IC | | IC6000 | 6-704-600-01 | IC M24C02-WMN6T(B) | | |
| 335 | | B | IC | | IC6001 | 8-759-679-54 | IC SN74LVC14APWR | | |
| 336 | | B | IC | | IC7000 | 6-707-927-01 | IC BD9775FV | | |
| 337 | | B | IC | | IC7001 | 6-709-441-01 | IC SI8008TM-TL | | |
| 338 | | B | IC | | IC7002 | 6-709-441-01 | IC SI8008TM-TL | | |
| 339 | | B | IC | | IC7004 | 6-708-862-01 | IC MM1662FTRE | | |
| 340 | | B | IC | | IC7005 | 6-705-469-01 | IC BA50BC0FP-E2 | | |
| 341 | | B | IC | | IC9000 | 6-704-819-01 | IC CS4335-KSZR | | |
| 342 | | B | IC | | IC9001 | 6-704-001-01 | IC BR24L02F-WE2 | | |
| 343 | | B | IC | | IC9002 | 6-708-758-01 | IC PCA9517DP.118 | | |
| 344 | | B | IC | * | IC9711 | 6-703-108-01 | IC SN74LVC2G04DCKR | | |
| 345 | | B | JACK | | J6000 | 1-750-925-11 | JACK (SMALL TYPE) | | |
| 346 | | B | COIL | | L1002 | 1-400-794-21 | FERRITE 0UH | | |
| 347 | | B | COIL | | L5000 | 1-456-984-11 | INDUCTOR 0UH | | |
| 348 | | B | COIL | | L5001 | 1-456-984-11 | INDUCTOR 0UH | | |
| 349 | | B | COIL | | L5002 | 1-456-984-11 | INDUCTOR 0UH | | |
| 350 | | B | COIL | | L5003 | 1-456-984-11 | INDUCTOR 0UH | | |
| 351 | | B | COIL | | L5004 | 1-456-984-11 | INDUCTOR 0UH | | |
| 352 | | B | COIL | | L5005 | 1-400-177-21 | FERRITE 0UH | | |
| 353 | | B | COIL | | L5006 | 1-469-561-21 | INDUCTOR 100UH | | |
| 354 | | B | COIL | | L5201 | 1-400-794-21 | FERRITE 0UH | | |
| 355 | | B | COIL | | L5202 | 1-412-054-21 | INDUCTOR 2.2UH | | |
| 356 | | B | COIL | | L5203 | 1-469-551-21 | INDUCTOR 2.2UH | | |
| 357 | | B | COIL | | L5205 | 1-469-551-21 | INDUCTOR 2.2UH | | |
| 358 | | B | COIL | | L5206 | 1-469-551-21 | INDUCTOR 2.2UH | | |
| 359 | | B | COIL | | L5500 | 1-400-794-21 | FERRITE 0UH | | |
| 360 | | B | COIL | | L5501 | 1-400-794-21 | FERRITE 0UH | | |
| 361 | | B | COIL | | L7000 | 1-416-740-11 | INDUCTOR 10UH | | |
| 362 | | B | COIL | | L7001 | 1-457-041-21 | INDUCTOR 10UH | | |

| No. | # | Board | Type | △/△* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|------------|------|----------|--------------|---------------------------|-----------|-----------|
| 363 | | B | COIL | | L7002 | 1-481-081-11 | INDUCTOR 47UH | | |
| 364 | | B | COIL | | L7003 | 1-481-080-11 | INDUCTOR 22UH | | |
| 365 | | B | COIL | | L7004 | 1-481-083-11 | INDUCTOR 22UH | | |
| 366 | | B | COIL | | L7005 | 1-456-786-21 | INDUCTOR 47UH | | |
| 367 | | B | COIL | | L7006 | 1-412-056-11 | INDUCTOR 4.7UH | | |
| 368 | | B | COIL | | L7007 | 1-416-740-11 | INDUCTOR 10UH | | |
| 369 | | B | COIL | * | L9000 | 1-813-308-11 | INDUCTOR 0UH | | |
| 370 | | B | COIL | * | L9001 | 1-813-308-11 | INDUCTOR 0UH | | |
| 371 | | B | COIL | * | L9002 | 1-813-308-11 | INDUCTOR 0UH | | |
| 372 | | B | COIL | * | L9003 | 1-813-308-11 | INDUCTOR 0UH | | |
| 373 | | B | COIL | | L9004 | 1-469-555-21 | INDUCTOR 10UH | | |
| 374 | | B | COIL | | L9005 | 1-469-555-21 | INDUCTOR 10UH | | |
| 375 | | B | IC LINK | △ | PS6000 | 1-576-122-21 | IC LINK 0.4A 72V | | |
| 376 | | B | IC LINK | △ | PS7000 | 1-576-603-21 | FUSE 3.15A 24V | | |
| 377 | | B | TRANSISTOR | | Q1001 | 6-551-387-01 | TRANSISTOR SSM6N16FU | | |
| 378 | | B | TRANSISTOR | | Q1002 | 8-729-029-00 | TRANSISTOR DTC115EUA-T106 | | |
| 379 | | B | TRANSISTOR | | Q1003 | 8-729-028-74 | TRANSISTOR DTA114TUA-T106 | | |
| 380 | | B | TRANSISTOR | | Q1004 | 8-729-013-28 | TRANSISTOR HN1B01FU-TE85R | | |
| 381 | | B | TRANSISTOR | | Q1005 | 8-729-028-74 | TRANSISTOR DTA114TUA-T106 | | |
| 382 | | B | TRANSISTOR | | Q1006 | 8-729-029-04 | TRANSISTOR DTC123JUA-T106 | | |
| 383 | | B | TRANSISTOR | | Q1007 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 384 | | B | TRANSISTOR | | Q1700 | 6-551-387-01 | TRANSISTOR SSM6N16FU | | |
| 385 | | B | TRANSISTOR | | Q1701 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 386 | | B | TRANSISTOR | | Q5000 | 8-729-602-36 | TRANSISTOR 2SA1602-F | | |
| 387 | | B | TRANSISTOR | | Q5001 | 8-729-602-36 | TRANSISTOR 2SA1602-F | | |
| 388 | | B | TRANSISTOR | | Q6000 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 389 | | B | TRANSISTOR | | Q6001 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 390 | | B | TRANSISTOR | | Q7000 | 8-729-046-04 | TRANSISTOR FDS6690A | | |
| 391 | | B | TRANSISTOR | | Q7001 | 6-550-828-01 | TRANSISTOR RSQ035P03TR | | |
| 392 | | B | TRANSISTOR | | Q7005 | 6-550-851-01 | TRANSISTOR RSS050P03FTB | | |
| 393 | | B | TRANSISTOR | | Q7006 | 8-729-029-00 | TRANSISTOR DTC115EUA-T106 | | |
| 394 | | B | TRANSISTOR | | Q7007 | 8-729-602-21 | TRANSISTOR 2SC4154-F | | |
| 395 | | B | TRANSISTOR | | Q7008 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 396 | | B | TRANSISTOR | * | Q7009 | 6-550-663-01 | TRANSISTOR RSS100N03TB | | |
| 397 | | B | TRANSISTOR | | Q7500 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 398 | | B | TRANSISTOR | | Q7502 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 399 | | B | TRANSISTOR | | Q7503 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 400 | | B | TRANSISTOR | | Q7504 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 401 | | B | TRANSISTOR | | Q7505 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 402 | | B | TRANSISTOR | | Q7506 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 403 | | B | TRANSISTOR | | Q9000 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 404 | | B | TRANSISTOR | | Q9001 | 8-729-025-28 | TRANSISTOR 2SK1828 | | |
| 405 | | B | TRANSISTOR | | Q9003 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 406 | | B | TRANSISTOR | | Q9004 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 407 | | B | TRANSISTOR | | Q9005 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 408 | | B | TRANSISTOR | | Q9006 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 409 | | B | TRANSISTOR | | Q9007 | 6-551-364-01 | TRANSISTOR DTC614TUT106 | | |
| 410 | | B | TRANSISTOR | | Q9008 | 6-551-364-01 | TRANSISTOR DTC614TUT106 | | |
| 411 | | B | TRANSISTOR | | Q9009 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 412 | | B | TRANSISTOR | | Q9010 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 413 | | B | RESISTOR | | R1001 | 1-216-864-11 | SHORT CHIP 0 | | |
| 414 | | B | RESISTOR | | R1002 | 1-218-990-81 | SHORT CHIP 0 | | |
| 415 | | B | RESISTOR | | R1005 | 1-208-683-11 | METAL CHIP 1K 0.5% 1/16W | | |
| 416 | | B | RESISTOR | | R1007 | 1-216-864-11 | SHORT CHIP 0 | | |
| 417 | | B | RESISTOR | | R1010 | 1-218-990-81 | SHORT CHIP 0 | | |
| 418 | | B | RESISTOR | | R1011 | 1-216-864-11 | SHORT CHIP 0 | | |
| 419 | | B | RESISTOR | | R1012 | 1-216-864-11 | SHORT CHIP 0 | | |
| 420 | | B | RESISTOR | | R1013 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 421 | | B | RESISTOR | | R1014 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 422 | | B | RESISTOR | | R1015 | 1-216-864-11 | SHORT CHIP 0 | | |
| 423 | | B | RESISTOR | | R1016 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 424 | | B | RESISTOR | | R1017 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 425 | | B | RESISTOR | | R1018 | 1-216-864-11 | SHORT CHIP 0 | | |
| 426 | | B | RESISTOR | | R1019 | 1-216-864-11 | SHORT CHIP 0 | | |
| 427 | | B | RESISTOR | | R1020 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 428 | | B | RESISTOR | | R1021 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 429 | | B | RESISTOR | | R1022 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 430 | | B | RESISTOR | | R1023 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 431 | | B | RESISTOR | | R1024 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 432 | | B | RESISTOR | | R1025 | 1-216-864-11 | SHORT CHIP 0 | | |
| 433 | | B | RESISTOR | | R1026 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 434 | | B | RESISTOR | | R1027 | 1-400-591-22 | FERRITE 0UH | | |
| 435 | | B | RESISTOR | | R1031 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 436 | | B | RESISTOR | | R1032 | 1-400-807-21 | FERRITE 0UH | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|--------------|----------|--------------|----------------------------|-----------|-----------|
| 437 | | B | RESISTOR | | R1034 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 438 | | B | RESISTOR | | R1035 | 1-216-864-11 | SHORT CHIP 0 | | |
| 439 | | B | RESISTOR | | R1036 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 440 | | B | RESISTOR | | R1037 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 441 | | B | RESISTOR | | R1038 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 442 | | B | RESISTOR | | R1045 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 443 | | B | RESISTOR | | R1046 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 444 | | B | RESISTOR | | R1047 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 445 | | B | RESISTOR | | R1048 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 446 | | B | RESISTOR | | R1049 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 447 | | B | RESISTOR | | R1052 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 448 | | B | RESISTOR | | R1053 | 1-218-990-81 | SHORT CHIP 0 | | |
| 449 | | B | RESISTOR | | R1058 | 1-218-990-81 | SHORT CHIP 0 | | |
| 450 | | B | RESISTOR | | R1061 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 451 | | B | RESISTOR | | R1064 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 452 | | B | RESISTOR | | R1065 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 453 | | B | RESISTOR | | R1066 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 454 | | B | RESISTOR | | R1070 | 1-216-864-11 | SHORT CHIP 0 | | |
| 455 | | B | RESISTOR | | R1073 | 1-218-990-81 | SHORT CHIP 0 | | |
| 456 | | B | RESISTOR | | R1075 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 457 | | B | RESISTOR | | R1076 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 458 | | B | RESISTOR | | R1078 | 1-218-990-81 | SHORT CHIP 0 | | |
| 459 | | B | RESISTOR | | R1079 | 1-400-807-21 | FERRITE 0UH | | |
| 460 | | B | RESISTOR | | R1080 | 1-400-807-21 | FERRITE 0UH | | |
| 461 | | B | RESISTOR | | R1081 | 1-400-807-21 | FERRITE 0UH | | |
| 462 | | B | RESISTOR | | R1082 | 1-400-807-21 | FERRITE 0UH | | |
| 463 | | B | RESISTOR | | R1083 | 1-400-807-21 | FERRITE 0UH | | |
| 464 | | B | RESISTOR | | R1084 | 1-400-807-21 | FERRITE 0UH | | |
| 465 | | B | RESISTOR | | R1085 | 1-400-807-21 | FERRITE 0UH | | |
| 466 | | B | RESISTOR | | R1087 | 1-216-864-11 | SHORT CHIP 0 | | |
| 467 | | B | RESISTOR | | R1101 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 468 | | B | RESISTOR | | R1107 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 469 | | B | RESISTOR | | R1108 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 470 | | B | RESISTOR | | R1109 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 471 | | B | RESISTOR | | R1110 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 472 | | B | RESISTOR | | R1111 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 473 | | B | RESISTOR | | R1112 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 474 | | B | RESISTOR | | R1113 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 475 | | B | RESISTOR | | R1115 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 476 | | B | RESISTOR | | R1116 | 1-218-990-81 | SHORT CHIP 0 | | |
| 477 | | B | RESISTOR | | R1117 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 478 | | B | RESISTOR | | R1119 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 479 | | B | RESISTOR | | R1122 | 1-216-864-11 | SHORT CHIP 0 | | |
| 480 | | B | RESISTOR | | R1123 | 1-216-864-11 | SHORT CHIP 0 | | |
| 481 | | B | RESISTOR | | R1124 | 1-216-864-11 | SHORT CHIP 0 | | |
| 482 | | B | RESISTOR | | R1125 | 1-216-864-11 | SHORT CHIP 0 | | |
| 483 | | B | RESISTOR | | R1138 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 484 | | B | RESISTOR | | R1142 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 485 | | B | RESISTOR | | R1144 | 1-208-691-11 | METAL CHIP 2.2K 0.5% 1/16W | | |
| 486 | | B | RESISTOR | | R1147 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 487 | | B | RESISTOR | | R1158 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 488 | | B | RESISTOR | | R1160 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 489 | | B | RESISTOR | | R1161 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 490 | | B | RESISTOR | | R1162 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 491 | | B | RESISTOR | | R1163 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 492 | | B | RESISTOR | | R1164 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 493 | | B | RESISTOR | | R1165 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 494 | | B | RESISTOR | | R1167 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 495 | | B | RESISTOR | | R1168 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 496 | | B | RESISTOR | | R1169 | 1-216-864-11 | SHORT CHIP 0 | | |
| 497 | | B | RESISTOR | | R1170 | 1-400-794-21 | FERRITE 0UH | | |
| 498 | | B | RESISTOR | | R1180 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 499 | | B | RESISTOR | | R1183 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 500 | | B | RESISTOR | | R1186 | 1-218-990-81 | SHORT CHIP 0 | | |
| 501 | | B | RESISTOR | | R1188 | 1-218-990-81 | SHORT CHIP 0 | | |
| 502 | | B | RESISTOR | | R1190 | 1-208-886-81 | METAL CHIP 910 0.5% 1/16W | | |
| 503 | | B | RESISTOR | | R1191 | 1-218-969-11 | RES-CHIP 22K 5% 1/16W | | |
| 504 | | B | RESISTOR | | R1192 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 505 | | B | RESISTOR | | R1193 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 506 | | B | RESISTOR | | R1195 | 1-218-990-81 | SHORT CHIP 0 | | |
| 507 | | B | RESISTOR | | R1196 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 508 | | B | RESISTOR | | R1198 | 1-218-990-81 | SHORT CHIP 0 | | |
| 509 | | B | RESISTOR | | R1199 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 510 | | B | RESISTOR | | R1200 | 1-218-990-81 | SHORT CHIP 0 | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|---------------|----------|--------------|----------------------------|-----------|-----------|
| 511 | | B | RESISTOR | | R1202 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 512 | | B | RESISTOR | | R1205 | 1-218-990-81 | SHORT CHIP 0 | | |
| 513 | | B | RESISTOR | | R1206 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 514 | | B | RESISTOR | | R1207 | 1-218-949-11 | RES-CHIP 470 5% 1/16W | | |
| 515 | | B | RESISTOR | | R1208 | 1-218-990-81 | SHORT CHIP 0 | | |
| 516 | | B | RESISTOR | | R1209 | 1-218-990-81 | SHORT CHIP 0 | | |
| 517 | | B | RESISTOR | | R1210 | 1-218-949-11 | RES-CHIP 470 5% 1/16W | | |
| 518 | | B | RESISTOR | | R1211 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 519 | | B | RESISTOR | | R1212 | 1-218-949-11 | RES-CHIP 470 5% 1/16W | | |
| 520 | | B | RESISTOR | | R1218 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 521 | | B | RESISTOR | | R1223 | 1-218-945-11 | RES-CHIP 220 5% 1/16W | | |
| 522 | | B | RESISTOR | | R1224 | 1-218-990-81 | SHORT CHIP 0 | | |
| 523 | | B | RESISTOR | | R1225 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 524 | | B | RESISTOR | | R1226 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 525 | | B | RESISTOR | | R1227 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 526 | | B | RESISTOR | | R1235 | 1-216-864-11 | SHORT CHIP 0 | | |
| 527 | | B | RESISTOR | | R1239 | 1-216-864-11 | SHORT CHIP 0 | | |
| 528 | | B | RESISTOR | | R1240 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 529 | | B | RESISTOR | | R1242 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 530 | | B | RESISTOR | | R1243 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 531 | | B | RESISTOR | | R1246 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 532 | | B | RESISTOR | | R1247 | 1-216-864-11 | SHORT CHIP 0 | | |
| 533 | | B | RESISTOR | | R1255 | 1-400-591-22 | FERRITE 0UH | | |
| 534 | | B | RESISTOR | | R1256 | 1-400-591-22 | FERRITE 0UH | | |
| 535 | | B | RESISTOR | | R1257 | 1-400-591-22 | FERRITE 0UH | | |
| 536 | | B | RESISTOR | | R1258 | 1-400-591-22 | FERRITE 0UH | | |
| 537 | | B | RESISTOR | | R1259 | 1-400-591-22 | FERRITE 0UH | | |
| 538 | | B | RESISTOR | | R1260 | 1-400-591-22 | FERRITE 0UH | | |
| 539 | | B | RESISTOR | | R1261 | 1-400-591-22 | FERRITE 0UH | | |
| 540 | | B | RESISTOR | | R1262 | 1-400-591-22 | FERRITE 0UH | | |
| 541 | | B | RESISTOR | | R1263 | 1-400-591-22 | FERRITE 0UH | | |
| 542 | | B | RESISTOR | | R1264 | 1-400-591-22 | FERRITE 0UH | | |
| 543 | | B | RESISTOR | | R1265 | 1-400-591-22 | FERRITE 0UH | | |
| 544 | | B | RESISTOR | | R1266 | 1-216-864-11 | SHORT CHIP 0 | | |
| 545 | | B | RESISTOR | | R1267 | 1-400-591-22 | FERRITE 0UH | | |
| 546 | | B | RESISTOR | | R1270 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 547 | | B | RESISTOR | | R1290 | 1-218-990-81 | SHORT CHIP 0 | | |
| 548 | | B | RESISTOR | | R1295 | 1-208-909-11 | METAL CHIP 8.2K 0.5% 1/16W | | |
| 549 | | B | RESISTOR | | R1701 | 1-216-864-11 | SHORT CHIP 0 | | |
| 550 | | B | RESISTOR | | R1702 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 551 | | B | RESISTOR | | R1703 | 1-216-864-11 | SHORT CHIP 0 | | |
| 552 | | B | RESISTOR | | R1705 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 553 | | B | RESISTOR | | R1706 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 554 | | B | RESISTOR | | R1709 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 555 | | B | RESISTOR | | R1710 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 556 | | B | RESISTOR | | R1721 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 557 | | B | RESISTOR | | R1722 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 558 | | B | RESISTOR | | R4702 | 1-216-864-11 | SHORT CHIP 0 | | |
| 559 | | B | RESISTOR | | R4703 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 560 | | B | RESISTOR | | R4710 | 1-216-864-11 | SHORT CHIP 0 | | |
| 561 | | B | RESISTOR | | R5000 | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W | | |
| 562 | | B | RESISTOR | | R5002 | 1-218-949-11 | RES-CHIP 470 5% 1/16W | | |
| 563 | | B | RESISTOR | | R5003 | 1-218-990-81 | SHORT CHIP 0 | | |
| 564 | | B | RESISTOR | | R5004 | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W | | |
| 565 | | B | RESISTOR | | R5007 | 1-218-949-11 | RES-CHIP 470 5% 1/16W | | |
| 566 | | B | RESISTOR | | R5008 | 1-218-990-81 | SHORT CHIP 0 | | |
| 567 | | B | RESISTOR | | R5009 | 1-218-989-11 | RES-CHIP 1M 5% 1/16W | | |
| 568 | | B | RESISTOR | | R5010 | 1-218-935-11 | RES-CHIP 33 5% 1/16W | | |
| 569 | | B | RESISTOR | | R5011 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 570 | | B | RESISTOR | | R5012 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 571 | | B | RESISTOR | | R5013 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 572 | | B | RESISTOR | | R5014 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 573 | | B | RESISTOR | | R5016 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 574 | | B | RESISTOR | | R5017 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 575 | | B | RESISTOR | | R5025 | 1-218-990-81 | SHORT CHIP 0 | | |
| 576 | | B | RESISTOR | | R5026 | 1-216-864-11 | SHORT CHIP 0 | | |
| 577 | | B | RESISTOR | | R5027 | 1-216-864-11 | SHORT CHIP 0 | | |
| 578 | | B | RESISTOR | | R5029 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 579 | | B | RESISTOR | | R5031 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 580 | | B | RESISTOR | | R5039 | 1-218-990-81 | SHORT CHIP 0 | | |
| 581 | | B | RESISTOR | | R5040 | 1-218-990-81 | SHORT CHIP 0 | | |
| 582 | | B | RESISTOR | | R5042 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 583 | | B | RESISTOR | | R5043 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 584 | | B | RESISTOR | | R5044 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |

| No. | # | Board | Type | Δ / [*] | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|-------------------------|----------|--------------|----------------------------|-----------|-----------|
| 585 | | B | RESISTOR | | R5045 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 586 | | B | RESISTOR | | R5046 | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W | | |
| 587 | | B | RESISTOR | | R5047 | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W | | |
| 588 | | B | RESISTOR | | R5210 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 589 | | B | RESISTOR | | R5211 | 1-218-990-81 | SHORT CHIP 0 | | |
| 590 | | B | RESISTOR | | R5212 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 591 | | B | RESISTOR | | R5214 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 592 | | B | RESISTOR | | R5215 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 593 | | B | RESISTOR | | R5218 | 1-216-864-11 | SHORT CHIP 0 | | |
| 594 | | B | RESISTOR | | R5221 | 1-216-864-11 | SHORT CHIP 0 | | |
| 595 | | B | RESISTOR | | R5222 | 1-216-864-11 | SHORT CHIP 0 | | |
| 596 | | B | RESISTOR | | R5223 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 597 | | B | RESISTOR | | R5224 | 1-218-990-81 | SHORT CHIP 0 | | |
| 598 | | B | RESISTOR | | R5225 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 599 | | B | RESISTOR | | R5226 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 600 | | B | RESISTOR | | R5500 | 1-400-794-21 | FERRITE 0UH | | |
| 601 | | B | RESISTOR | | R5503 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 602 | | B | RESISTOR | | R5504 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 603 | | B | RESISTOR | | R5505 | 1-218-990-81 | SHORT CHIP 0 | | |
| 604 | | B | RESISTOR | | R5506 | 1-211-986-11 | METAL CHIP 51 0.5% 1/10W | | |
| 605 | | B | RESISTOR | | R5507 | 1-218-990-81 | SHORT CHIP 0 | | |
| 606 | | B | RESISTOR | | R5508 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 607 | | B | RESISTOR | | R5509 | 1-211-986-11 | METAL CHIP 51 0.5% 1/10W | | |
| 608 | | B | RESISTOR | | R5510 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 609 | | B | RESISTOR | | R5511 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 610 | | B | RESISTOR | | R5512 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 611 | | B | RESISTOR | | R5513 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 612 | | B | RESISTOR | | R5514 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 613 | | B | RESISTOR | | R5515 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 614 | | B | RESISTOR | | R5516 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 615 | | B | RESISTOR | | R5517 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 616 | | B | RESISTOR | | R5518 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 617 | | B | RESISTOR | | R5519 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 618 | | B | RESISTOR | | R6000 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 619 | | B | RESISTOR | | R6001 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 620 | | B | RESISTOR | | R6004 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 621 | | B | RESISTOR | | R6005 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 622 | | B | RESISTOR | | R6006 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 623 | | B | RESISTOR | | R6007 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 624 | | B | RESISTOR | | R6008 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 625 | | B | RESISTOR | | R6009 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 626 | | B | RESISTOR | | R6010 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 627 | | B | RESISTOR | | R6011 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 628 | | B | RESISTOR | | R6012 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 629 | | B | RESISTOR | | R6013 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 630 | | B | RESISTOR | | R6014 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 631 | | B | RESISTOR | | R6015 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 632 | | B | RESISTOR | | R6016 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 633 | | B | RESISTOR | | R6017 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 634 | | B | RESISTOR | | R6018 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 635 | | B | RESISTOR | | R6019 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 636 | | B | RESISTOR | | R6021 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 637 | | B | RESISTOR | | R6022 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 638 | | B | RESISTOR | | R6023 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 639 | | B | RESISTOR | | R6029 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 640 | | B | RESISTOR | | R6030 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 641 | | B | RESISTOR | | R6041 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 642 | | B | RESISTOR | | R6042 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 643 | | B | RESISTOR | | R6043 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 644 | | B | RESISTOR | | R6044 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 645 | | B | RESISTOR | | R6045 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 646 | | B | RESISTOR | | R6046 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 647 | | B | RESISTOR | | R7000 | 1-218-877-11 | METAL CHIP 18K 0.5% 1/10W | | |
| 648 | | B | RESISTOR | | R7001 | 1-218-877-11 | METAL CHIP 18K 0.5% 1/10W | | |
| 649 | | B | RESISTOR | | R7002 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 650 | | B | RESISTOR | | R7003 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 651 | | B | RESISTOR | | R7004 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 652 | | B | RESISTOR | | R7005 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 653 | | B | RESISTOR | | R7006 | 1-218-891-11 | METAL CHIP 68K 0.5% 1/10W | | |
| 654 | | B | RESISTOR | | R7007 | 1-218-869-11 | METAL CHIP 8.2K 0.5% 1/10W | | |
| 655 | | B | RESISTOR | | R7008 | 1-218-894-11 | METAL CHIP 91K 0.5% 1/10W | | |
| 656 | | B | RESISTOR | | R7009 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 657 | | B | RESISTOR | | R7010 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 658 | | B | RESISTOR | | R7011 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|--------------|----------|--------------|----------------------------|-----------|-----------|
| 659 | | B | RESISTOR | | R7012 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | | |
| 660 | | B | RESISTOR | | R7013 | 1-218-882-11 | METAL CHIP 30K 0.5% 1/10W | | |
| 661 | | B | RESISTOR | | R7014 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 662 | | B | RESISTOR | | R7015 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 663 | | B | RESISTOR | | R7016 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 664 | | B | RESISTOR | | R7017 | 1-216-815-11 | METAL CHIP 330 5% 1/10W | | |
| 665 | | B | RESISTOR | | R7019 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | | |
| 666 | | B | RESISTOR | | R7020 | 1-216-864-11 | SHORT CHIP 0 | | |
| 667 | | B | RESISTOR | | R7021 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 668 | | B | RESISTOR | | R7022 | 1-216-864-11 | SHORT CHIP 0 | | |
| 669 | | B | RESISTOR | | R7023 | 1-216-864-11 | SHORT CHIP 0 | | |
| 670 | | B | RESISTOR | | R7024 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 671 | | B | RESISTOR | | R7025 | 1-216-864-11 | SHORT CHIP 0 | | |
| 672 | | B | RESISTOR | | R7026 | 1-216-864-11 | SHORT CHIP 0 | | |
| 673 | | B | RESISTOR | | R7027 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 674 | | B | RESISTOR | | R7028 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 675 | | B | RESISTOR | | R7029 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 676 | | B | RESISTOR | | R7030 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 677 | | B | RESISTOR | | R7031 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 678 | | B | RESISTOR | | R7032 | 1-218-843-11 | METAL CHIP 680 0.5% 1/10W | | |
| 679 | | B | RESISTOR | | R7035 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 680 | | B | RESISTOR | | R7036 | 1-218-845-11 | METAL CHIP 820 0.5% 1/10W | | |
| 681 | | B | RESISTOR | | R7040 | 1-216-295-91 | SHORT CHIP 0 | | |
| 682 | | B | RESISTOR | | R7041 | 1-400-794-21 | FERRITE 0UH | | |
| 683 | | B | RESISTOR | | R7045 | 1-216-295-91 | SHORT CHIP 0 | | |
| 684 | | B | RESISTOR | | R7046 | 1-216-295-91 | SHORT CHIP 0 | | |
| 685 | | B | RESISTOR | | R7048 | 1-216-295-91 | SHORT CHIP 0 | | |
| 686 | | B | RESISTOR | | R7050 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 687 | | B | RESISTOR | | R7051 | 1-218-839-11 | METAL CHIP 470 0.5% 1/10W | | |
| 688 | | B | RESISTOR | | R7053 | 1-218-859-11 | METAL CHIP 3.3K 0.5% 1/10W | | |
| 689 | | B | RESISTOR | | R7054 | 1-218-859-11 | METAL CHIP 3.3K 0.5% 1/10W | | |
| 690 | | B | RESISTOR | | R7055 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 691 | | B | RESISTOR | | R7056 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 692 | | B | RESISTOR | | R7057 | 1-216-843-11 | METAL CHIP 68K 5% 1/10W | | |
| 693 | | B | RESISTOR | | R7058 | 1-216-851-11 | METAL CHIP 330K 5% 1/10W | | |
| 694 | | B | RESISTOR | | R7060 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 695 | | B | RESISTOR | | R7063 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 696 | | B | RESISTOR | | R7064 | 1-216-864-11 | SHORT CHIP 0 | | |
| 697 | | B | RESISTOR | | R7066 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | | |
| 698 | | B | RESISTOR | | R7067 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | | |
| 699 | | B | RESISTOR | | R7080 | 1-400-591-22 | FERRITE 0UH | | |
| 700 | | B | RESISTOR | | R7081 | 1-400-591-22 | FERRITE 0UH | | |
| 701 | | B | RESISTOR | | R7082 | 1-400-591-22 | FERRITE 0UH | | |
| 702 | | B | RESISTOR | | R7083 | 1-400-591-22 | FERRITE 0UH | | |
| 703 | | B | RESISTOR | | R7506 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 704 | | B | RESISTOR | | R7507 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 705 | | B | RESISTOR | | R7510 | 1-216-864-11 | SHORT CHIP 0 | | |
| 706 | | B | RESISTOR | | R7515 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 707 | | B | RESISTOR | | R7516 | 1-216-844-11 | METAL CHIP 82K 5% 1/10W | | |
| 708 | | B | RESISTOR | | R7517 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 709 | | B | RESISTOR | | R7518 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 710 | | B | RESISTOR | | R7542 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 711 | | B | RESISTOR | | R7543 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 712 | | B | RESISTOR | | R7544 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 713 | | B | RESISTOR | | R7545 | 1-218-977-11 | RES-CHIP 100K 5% 1/16W | | |
| 714 | | B | RESISTOR | | R7546 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 715 | | B | RESISTOR | | R9001 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 716 | | B | RESISTOR | | R9002 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 717 | | B | RESISTOR | | R9003 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 718 | | B | RESISTOR | | R9004 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 719 | | B | RESISTOR | | R9005 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 720 | | B | RESISTOR | | R9006 | 1-208-683-11 | METAL CHIP 1K 0.5% 1/16W | | |
| 721 | | B | RESISTOR | | R9007 | 1-218-990-81 | SHORT CHIP 0 | | |
| 722 | | B | RESISTOR | | R9008 | 1-218-990-81 | SHORT CHIP 0 | | |
| 723 | | B | RESISTOR | | R9009 | 1-218-990-81 | SHORT CHIP 0 | | |
| 724 | | B | RESISTOR | | R9010 | 1-216-864-11 | SHORT CHIP 0 | | |
| 725 | | B | RESISTOR | | R9011 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 726 | | B | RESISTOR | | R9012 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 727 | | B | RESISTOR | | R9013 | 1-208-911-11 | METAL CHIP 10K 0.5% 1/16W | | |
| 728 | | B | RESISTOR | | R9014 | 1-216-864-11 | SHORT CHIP 0 | | |
| 729 | | B | RESISTOR | | R9015 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 730 | | B | RESISTOR | | R9016 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 731 | | B | RESISTOR | | R9017 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 732 | | B | RESISTOR | | R9018 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |

| No. | # | Board | Type | Δ/\wedge | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|-----------------|----------|--------------|---------------------------|-----------|-----------|
| 733 | | B | RESISTOR | | R9019 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 734 | | B | RESISTOR | | R9020 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 735 | | B | RESISTOR | | R9022 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 736 | | B | RESISTOR | | R9025 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 737 | | B | RESISTOR | | R9031 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 738 | | B | RESISTOR | | R9032 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 739 | | B | RESISTOR | | R9033 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 740 | | B | RESISTOR | | R9034 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 741 | | B | RESISTOR | | R9035 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 742 | | B | RESISTOR | | R9036 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 743 | | B | RESISTOR | | R9037 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 744 | | B | RESISTOR | | R9038 | 1-218-929-11 | RES-CHIP 10 5% 1/16W | | |
| 745 | | B | RESISTOR | | R9040 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 746 | | B | RESISTOR | | R9041 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 747 | | B | RESISTOR | | R9044 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 748 | | B | RESISTOR | | R9045 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 749 | | B | RESISTOR | | R9046 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 750 | | B | RESISTOR | | R9047 | 1-216-295-91 | SHORT CHIP 0 | | |
| 751 | | B | RESISTOR | | R9048 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 752 | | B | RESISTOR | | R9051 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 753 | | B | RESISTOR | | R9060 | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W | | |
| 754 | | B | RESISTOR | | R9061 | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W | | |
| 755 | | B | RESISTOR | | R9062 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 756 | | B | RESISTOR | | R9063 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 757 | | B | RESISTOR | | R9064 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 758 | | B | RESISTOR | | R9065 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 759 | | B | RESISTOR | | R9066 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 760 | | B | RESISTOR | | R9067 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 761 | | B | RESISTOR | | R9070 | 1-218-953-11 | RES-CHIP 1K 5% 1/16W | | |
| 762 | | B | RESISTOR | | R9071 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 763 | | B | RESISTOR | | R9072 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 764 | | B | RESISTOR | | R9073 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 765 | | B | RESISTOR | | R9074 | 1-218-969-11 | RES-CHIP 22K 5% 1/16W | | |
| 766 | | B | RESISTOR | | R9075 | 1-218-989-11 | RES-CHIP 1M 5% 1/16W | | |
| 767 | | B | RESISTOR | | R9076 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 768 | | B | RESISTOR | | R9944 | 1-216-295-91 | SHORT CHIP 0 | | |
| 769 | | B | NETWORK | | RB1004 | 1-234-372-11 | RES, NETWORK 100 (1005X4) | | |
| 770 | | B | NETWORK | | RB1005 | 1-234-372-11 | RES, NETWORK 100 (1005X4) | | |
| 771 | | B | NETWORK | | RB1006 | 1-234-372-11 | RES, NETWORK 100 (1005X4) | | |
| 772 | | B | NETWORK | | RB1007 | 1-234-378-21 | RES, NETWORK 10K (1005X4) | | |
| 773 | | B | NETWORK | | RB1008 | 1-234-378-21 | RES, NETWORK 10K (1005X4) | | |
| 774 | | B | NETWORK | | RB5201 | 1-234-372-11 | RES, NETWORK 100 (1005X4) | | |
| 775 | | B | NETWORK | | RB5202 | 1-234-372-11 | RES, NETWORK 100 (1005X4) | | |
| 776 | | B | NETWORK | | RB5203 | 1-234-372-11 | RES, NETWORK 100 (1005X4) | | |
| 777 | | B | NETWORK | | RB5500 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 778 | | B | NETWORK | | RB5501 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 779 | | B | NETWORK | | RB5502 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 780 | | B | NETWORK | | RB5503 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 781 | | B | NETWORK | | RB5504 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 782 | | B | NETWORK | | RB5505 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 783 | | B | NETWORK | | RB5506 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 784 | | B | NETWORK | | RB5507 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 785 | | B | NETWORK | | RB5508 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 786 | | B | NETWORK | | RB5509 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 787 | | B | NETWORK | | RB5510 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 788 | | B | NETWORK | | RB5511 | 1-234-370-21 | RES, NETWORK 22 (1005X4) | | |
| 789 | | B | VARISTOR | | VD6000 | 1-802-078-11 | VARISTOR (SMD) | | |
| 790 | | B | VARISTOR | | VD6001 | 1-802-078-11 | VARISTOR (SMD) | | |
| 791 | | B | VARISTOR | | VD6002 | 1-802-078-11 | VARISTOR (SMD) | | |
| 792 | | B | VARISTOR | | VD6003 | 1-802-078-11 | VARISTOR (SMD) | | |
| 793 | | B | VARISTOR | | VD6004 | 1-802-078-11 | VARISTOR (SMD) | | |
| 794 | | B | VARISTOR | | VD6005 | 1-802-078-11 | VARISTOR (SMD) | | |
| 795 | | B | VARISTOR | | VD6006 | 1-802-078-11 | VARISTOR (SMD) | | |
| 796 | | B | VARISTOR | | VD9001 | 1-802-078-11 | VARISTOR (SMD) | | |
| 797 | | B | VARISTOR | | VD9002 | 1-802-078-11 | VARISTOR (SMD) | | |
| 798 | | B | VARISTOR | | VD9003 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 799 | | B | VARISTOR | | VD9004 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 800 | | B | VARISTOR | | VD9005 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 801 | | B | VARISTOR | | VD9006 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 802 | | B | VARISTOR | | VD9007 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 803 | | B | VARISTOR | | VD9008 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 804 | | B | VARISTOR | | VD9010 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 805 | | B | VARISTOR | | VD9011 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 806 | | B | VARISTOR | | VD9012 | 6-500-701-01 | DIODE PGB1010603NR | | |

| No. | # | Board | Type | Δ/\wedge | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|-----------------|----------|--------------|----------------------------------|------------|-----------|
| 807 | | B | VARISTOR | | VD9013 | 6-500-701-01 | DIODE PGB1010603NR | | |
| 808 | | B | CRYSTAL | | X1001 | 1-813-070-21 | PIEZOELECTRIC OSCILLATOR | | |
| 809 | | B | CRYSTAL | | X1009 | 1-813-784-21 | VIBRATOR, CRYSTAL | | |
| 810 | | B | CRYSTAL | | X5000 | 1-813-773-11 | VIBRATOR, CRYSTAL | | |
| 811 | | TUG | CAPACITOR | | C3805 | 1-128-407-11 | ELECT CHIP 47UF 20% 50V | | |
| 812 | | TUG | CAPACITOR | | C3806 | 1-126-197-11 | ELECT CHIP 10UF 20.00% 50V | | |
| 813 | | TUG | CAPACITOR | | C3807 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 814 | | TUG | CAPACITOR | | C3808 | 1-162-921-11 | CERAMIC CHIP 33PF 5.00% 50V | | |
| 815 | | TUG | CAPACITOR | | C3809 | 1-127-931-21 | ELECT CHIP 470UF 20% 16V | | |
| 816 | | TUG | CAPACITOR | | C3810 | 1-162-921-11 | CERAMIC CHIP 33PF 5.00% 50V | | |
| 817 | | TUG | CAPACITOR | | C3815 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 818 | | TUG | CAPACITOR | | C3816 | 1-128-992-21 | ELECT CHIP 47UF 20% 25V | | |
| 819 | | TUG | CAPACITOR | | C3817 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 820 | | TUG | CAPACITOR | | C3818 | 1-128-992-21 | ELECT CHIP 47UF 20% 25V | | |
| 821 | | TUG | CAPACITOR | | C3819 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 822 | | TUG | CAPACITOR | | C3820 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 823 | | TUG | CAPACITOR | | C3821 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 824 | | TUG | CAPACITOR | | C3822 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 825 | | TUG | CAPACITOR | | C3901 | 1-162-925-11 | CERAMIC CHIP 68PF 5.00% 50V | | |
| 826 | | TUG | CAPACITOR | | C3902 | 1-162-925-11 | CERAMIC CHIP 68PF 5.00% 50V | | |
| 827 | | TUG | CAPACITOR | | C3904 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 828 | | TUG | CAPACITOR | | C3905 | 1-162-921-11 | CERAMIC CHIP 33PF 5.00% 50V | | |
| 829 | | TUG | CONNECTOR | | CN3802 | 1-819-339-11 | HEADER ASSEMBLY FOR PWB 12P | | |
| 830 | | TUG | CONNECTOR | | CN3803 | 1-819-476-11 | HEADER ASSEMBLY FOR PWB 8P | | |
| 831 | | TUG | CONNECTOR | | CN3903 | 1-819-337-11 | HEADER ASSEMBLY FOR PWB 10P | | |
| 832 | | TUG | CONNECTOR | | CN3904 | 1-819-474-11 | HEADER ASSEMBLY FOR PWB 6P | | |
| 833 | | TUG | CONNECTOR | | CN3905 | 1-695-915-11 | TAB (CONTACT) | | |
| 834 | | TUG | CONNECTOR | | CN3906 | 1-780-336-11 | EARTH TERMINAL | | |
| 835 | | TUG | CONNECTOR | | CN3907 | 1-780-336-11 | EARTH TERMINAL | | |
| 836 | | TUG | CONNECTOR | | CN3908 | 1-780-336-11 | EARTH TERMINAL | | |
| 837 | | TUG | CONNECTOR | | CN3909 | 1-780-336-11 | EARTH TERMINAL | | |
| 838 | | TUG | FERRITE BEAD | | FB3801 | 1-469-775-21 | FERRITE 0UH | | |
| 839 | | TUG | FERRITE BEAD | | FB3802 | 1-469-775-21 | FERRITE 0UH | | |
| 840 | | TUG | FERRITE BEAD | | FB3901 | 1-414-760-21 | FERRITE 0UH | | |
| 841 | | TUG | FERRITE BEAD | | FB3902 | 1-414-760-21 | FERRITE 0UH | | |
| 842 | | TUG | FERRITE BEAD | | FB3903 | 1-469-324-21 | FERRITE 0UH | | |
| 843 | | TUG | FERRITE BEAD | | FB3904 | 1-469-324-21 | FERRITE 0UH | | |
| 844 | | TUG | IC | | IC3802 | 6-705-469-01 | IC BA50BC0FP-E2 | | |
| 845 | | TUG | JUMPER READ | | JR3801 | 1-216-295-91 | SHORT CHIP 0 | | |
| 846 | | TUG | COIL | | L3802 | 1-412-058-11 | INDUCTOR 10UH | | |
| 847 | | TUG | COIL | | L3803 | 1-412-058-11 | INDUCTOR 10UH | | |
| 848 | | TUG | COIL | | L3806 | 1-412-052-21 | INDUCTOR 1UH | | |
| 849 | | TUG | COIL | | L3807 | 1-412-052-21 | INDUCTOR 1UH | | |
| 850 | | TUG | COIL | | L3901 | 1-414-580-21 | INDUCTOR 100NH | | |
| 851 | | TUG | COIL | | L3902 | 1-414-580-21 | INDUCTOR 100NH | | |
| 852 | | TUG | COIL | | L3903 | 1-414-580-21 | INDUCTOR 100NH | | |
| 853 | | TUG | COIL | | L3904 | 1-412-979-21 | INDUCTOR 1UH | | |
| 854 | | TUG | COIL | | L3905 | 1-414-580-21 | INDUCTOR 100NH | | |
| 855 | | TUG | TRANSISTOR | | Q3901 | 8-729-027-43 | TRANSISTOR DTC114EKA-T146 | | |
| 856 | | TUG | RESISTOR | | R3804 | 1-216-864-11 | SHORT CHIP 0 | | |
| 857 | | TUG | RESISTOR | | R3805 | 1-216-295-91 | SHORT CHIP 0 | | |
| 858 | | TUG | RESISTOR | | R3807 | 1-216-864-11 | SHORT CHIP 0 | | |
| 859 | | TUG | RESISTOR | | R3809 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | | |
| 860 | | TUG | RESISTOR | | R3810 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 861 | | TUG | RESISTOR | | R3901 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 862 | | TUG | RESISTOR | | R3902 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 863 | | TUG | RESISTOR | | R3905 | 1-216-864-11 | SHORT CHIP 0 | | |
| 864 | | TUG | RESISTOR | | R3906 | 1-216-864-11 | SHORT CHIP 0 | | |
| 865 | | TUG | RESISTOR | | R3907 | 1-218-907-11 | METAL CHIP 330K 0.5% 1/10W | | |
| 866 | | TUG | RESISTOR | | R3908 | 1-216-864-11 | SHORT CHIP 0 | | |
| 867 | | TUG | RESISTOR | | R3909 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 868 | | TUG | RESISTOR | | R3910 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 869 | | TUG | RESISTOR | | R3912 | 1-216-864-11 | SHORT CHIP 0 | | |
| 870 | | TUG | TUNER | | TU3900 | 8-597-536-01 | TUNER, FSS BTF-BG413Z | | |
| 871 | | G2A | CAPACITOR | | C6000 | 1-161-964-91 | CERAMIC 0.0047UF 250V | 40/46V2000 | |
| 872 | | G2A | CAPACITOR | | C6001 | 1-119-892-51 | CERAMIC 470PF 10.00% 250V | 40/46V2000 | |
| 873 | | G2A | CAPACITOR | | C6002 | 1-165-531-11 | MYLAR 1UF 10 275V | 40/46V2000 | |
| 874 | | G2A | CAPACITOR | | C6003 | 1-161-964-91 | CERAMIC 0.0047UF 250V | 40/46V2000 | |
| 875 | | G2A | CAPACITOR | | C6004 | 1-165-529-11 | MYLAR 0.22UF 10 275V | 40/46V2000 | |
| 876 | | G2A | CAPACITOR | | C6005 | 1-119-892-51 | CERAMIC 470PF 10.00% 250V | 40/46V2000 | |
| 877 | | G2A | CAPACITOR | | C6006 | 1-135-361-11 | ELECT(BLOCK) 180UF 20% 450V | 40/46V2000 | |
| 878 | | G2A | CAPACITOR | | C6008 | 1-135-361-11 | ELECT(BLOCK) 180UF 20% 450V | 40/46V2000 | |
| 879 | | G2A | CAPACITOR | | C6010 | 1-113-889-11 | CERAMIC 0.001UF 20.00% 250V | 40/46V2000 | |
| 880 | | G2A | CAPACITOR | | C6012 | 1-113-889-11 | CERAMIC 0.001UF 20.00% 250V | 40/46V2000 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|-----|----------|--------------|----------------------------------|------------|-----------|
| 881 | | G2A | CAPACITOR | | C6015 | 1-113-889-11 | CERAMIC 0.001UF 20.00% 250V | 40/46V2000 | |
| 882 | | G2A | CAPACITOR | | C6016 | 1-113-889-11 | CERAMIC 0.001UF 20.00% 250V | 40/46V2000 | |
| 883 | | G2A | CAPACITOR | | C6051 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | 40/46V2000 | |
| 884 | | G2A | CAPACITOR | | C6100 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | 40/46V2000 | |
| 885 | | G2A | CAPACITOR | | C6101 | 1-107-905-11 | ELECT 4.7UF 20% 50V | 40/46V2000 | |
| 886 | | G2A | CAPACITOR | | C6102 | 1-107-910-11 | ELECT CHIP 100UF 20% 50V | 40/46V2000 | |
| 887 | | G2A | CAPACITOR | | C6103 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | 40/46V2000 | |
| 888 | | G2A | CAPACITOR | | C6104 | 1-100-831-91 | CERAMIC CHIP 0.001UF 2% 50V | 40/46V2000 | |
| 889 | | G2A | CAPACITOR | | C6105 | 1-107-906-11 | ELECT 10UF 20% 50V | 40/46V2000 | |
| 890 | | G2A | CAPACITOR | | C6108 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | 40/46V2000 | |
| 891 | | G2A | CAPACITOR | | C6109 | 1-107-888-11 | ELECT 47UF 20% 25V | 40/46V2000 | |
| 892 | | G2A | CAPACITOR | | C6111 | 1-162-134-11 | CERAMIC 470PF 10.00% 2KV | 40/46V2000 | |
| 893 | | G2A | CAPACITOR | | C6112 | 1-100-310-11 | FILM 18000PF 3% 800V | 40/46V2000 | |
| 894 | | G2A | CAPACITOR | | C6116 | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V | 40/46V2000 | |
| 895 | | G2A | CAPACITOR | | C6200 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | 40/46V2000 | |
| 896 | | G2A | CAPACITOR | | C6202 | 1-112-242-21 | ELECT 1500UF 20% 25V | 40/46V2000 | |
| 897 | | G2A | CAPACITOR | | C6203 | 1-107-907-11 | ELECT 22UF 20% 50V | 40/46V2000 | |
| 898 | | G2A | CAPACITOR | | C6204 | 1-112-242-21 | ELECT 1500UF 20% 25V | 40/46V2000 | |
| 899 | | G2A | CAPACITOR | | C6205 | 1-112-242-21 | ELECT 1500UF 20% 25V | 40/46V2000 | |
| 900 | | G2A | CAPACITOR | | C6207 | 1-112-242-21 | ELECT 1500UF 20% 25V | 40/46V2000 | |
| 901 | | G2A | CAPACITOR | | C6216 | 1-107-928-11 | ELECT 4.7UF 20% 100V | 40/46V2000 | |
| 902 | | G2A | CAPACITOR | | C6217 | 1-112-229-21 | ELECT 1500UF 20% 16V | 40/46V2000 | |
| 903 | | G2A | CAPACITOR | | C6305 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | 40/46V2000 | |
| 904 | | G2A | CAPACITOR | | C6306 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | 40/46V2000 | |
| 905 | | G2A | CAPACITOR | | C6307 | 1-107-903-11 | ELECT 2.2UF 20% 50V | 40/46V2000 | |
| 906 | | G2A | CAPACITOR | | C6308 | 1-107-904-11 | ELECT 3.3UF 20% 50V | 40/46V2000 | |
| 907 | | G2A | CAPACITOR | | C6309 | 1-107-910-11 | ELECT 100UF 20% 50V | 40/46V2000 | |
| 908 | | G2A | CAPACITOR | | C6310 | 1-100-139-31 | FILM 0.001UF 5% 630V | 40/46V2000 | |
| 909 | | G2A | CAPACITOR | | C6314 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | 40/46V2000 | |
| 910 | | G2A | CAPACITOR | | C6315 | 1-165-729-31 | ELECT 470UF 20% 16V | 40/46V2000 | |
| 911 | | G2A | CAPACITOR | | C6316 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | 40/46V2000 | |
| 912 | | G2A | CAPACITOR | | C6401 | 1-107-882-91 | ELECT 100UF 20% 16V | 40/46V2000 | |
| 913 | | G2A | CAPACITOR | | C6402 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | 40/46V2000 | |
| 914 | | G2A | CAPACITOR | | C6404 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | 40/46V2000 | |
| 915 | | G2A | CAPACITOR | | C6405 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | 40/46V2000 | |
| 916 | | G2A | CAPACITOR | | C6406 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | 40/46V2000 | |
| 917 | | G2A | CAPACITOR | | C6407 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | 40/46V2000 | |
| 918 | | G2A | CAPACITOR | | C6408 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | 40/46V2000 | |
| 919 | | G2A | CAPACITOR | | C6409 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | 40/46V2000 | |
| 920 | | G2A | CAPACITOR | | C6412 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | 40/46V2000 | |
| 921 | | G2A | CAPACITOR | | C6413 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | 40/46V2000 | |
| 922 | | G2A | CAPACITOR | | C6451 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | 40/46V2000 | |
| 923 | | G2A | CAPACITOR | | C6454 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | 40/46V2000 | |
| 924 | | G2A | CAPACITOR | | C6504 | 1-162-134-11 | CERAMIC 470PF 10.00% 2KV | 40/46V2000 | |
| 925 | | G2A | CAPACITOR | | C6505 | 1-162-134-11 | CERAMIC 470PF 10.00% 2KV | 40/46V2000 | |
| 926 | | G2A | CAPACITOR | | C6507 | 1-107-888-11 | ELECT 47UF 20% 25V | 40/46V2000 | |
| 927 | | G2A | CAPACITOR | | C6517 | 1-117-227-11 | MYLAR 1UF 10.00% 450V | 40/46V2000 | |
| 928 | | G2A | CAPACITOR | | C6518 | 1-112-744-52 | MYLAR 1UF 10% 450V | 40/46V2000 | |
| 929 | | G2A | CAPACITOR | | C6519 | 1-162-969-11 | CERAMIC CHIP 0.0068UF 10.00% 25V | 40/46V2000 | |
| 930 | | G2A | CAPACITOR | | C6520 | 1-117-227-11 | MYLAR 1UF 10.00% 450V | 40/46V2000 | |
| 931 | | G2A | CAPACITOR | | C6521 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | 40/46V2000 | |
| 932 | | G2A | CAPACITOR | | C6522 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | 40/46V2000 | |
| 933 | | G2A | CAPACITOR | | C6523 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | 40/46V2000 | |
| 934 | | G2A | CAPACITOR | | C6525 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | 40/46V2000 | |
| 935 | | G2A | CAPACITOR | | C6526 | 1-107-906-11 | ELECT 10UF 20% 50V | 40/46V2000 | |
| 936 | | G2A | CONNECTOR | | CN6000 | 1-695-915-11 | TAB (CONTACT) | 40/46V2000 | |
| 937 | | G2A | CONNECTOR | * | CN6001 | 1-793-660-11 | PIN, CONNECTOR (PC BOARD) 3P | 40/46V2000 | |
| 938 | | G2A | CONNECTOR | | CN6011 | 1-537-770-21 | TERMINAL BOARD, GROUND | 40/46V2000 | |
| 939 | | G2A | CONNECTOR | * | CN6200 | 1-793-236-11 | PIN, CONNECTOR (PC BOARD) 14P | 40/46V2000 | |
| 940 | | G2A | CONNECTOR | * | CN6202 | 1-785-708-11 | PIN, CONNECTOR (PC BOARD) 12P | 40/46V2000 | |
| 941 | | G2A | CONNECTOR | * | CN6204 | 1-785-706-11 | PIN, CONNECTOR (PC BOARD) 10P | 40/46V2000 | |
| 942 | | G2A | CONNECTOR | | CN6206 | 1-695-915-11 | TAB (CONTACT) | 40/46V2000 | |
| 943 | | G2A | CONNECTOR | | CN6207 | 1-695-915-11 | TAB (CONTACT) | 40/46V2000 | |
| 944 | | G2A | CONNECTOR | | CN6211 | 1-537-770-21 | TERMINAL BOARD, GROUND | 40/46V2000 | |
| 945 | | G2A | CONNECTOR | | CN6214 | 1-537-770-21 | TERMINAL BOARD, GROUND | 40/46V2000 | |
| 946 | | G2A | CONNECTOR | | CN6216 | 1-537-770-21 | TERMINAL BOARD, GROUND | 40/46V2000 | |
| 947 | | G2A | CONNECTOR | * | CN6217 | 1-785-701-11 | PIN, CONNECTOR (PC BOARD) 3P | 40/46V2000 | |
| 948 | | G2A | DIODE | | D6000 | 8-719-054-89 | DIODE D15XB60 | 40/46V2000 | |
| 949 | | G2A | DIODE | | D6002 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 950 | | G2A | DIODE | | D6003 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 951 | | G2A | DIODE | | D6102 | 6-500-137-01 | DIODE BAT54HT1 | 40/46V2000 | |
| 952 | | G2A | DIODE | | D6103 | 8-719-979-64 | DIODE UF4005/23 | 40/46V2000 | |
| 953 | | G2A | DIODE | | D6104 | 6-501-043-01 | DIODE UMZ16NT106 | 40/46V2000 | |
| 954 | | G2A | DIODE | | D6105 | 6-501-043-01 | DIODE UMZ16NT106 | 40/46V2000 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|---------------|-----|----------|--------------|----------------------------|------------|-----------|
| 955 | | G2A | DIODE | | D6106 | 8-719-081-67 | DIODE M1FM3 | 40/46V2000 | |
| 956 | | G2A | DIODE | | D6107 | 8-719-081-67 | DIODE M1FM3 | 40/46V2000 | |
| 957 | | G2A | DIODE | | D6108 | 8-719-041-97 | DIODE MA113-(TX) | 40/46V2000 | |
| 958 | | G2A | DIODE | | D6109 | 8-719-022-90 | DIODE MA8160-M | 40/46V2000 | |
| 959 | | G2A | DIODE | | D6200 | 8-719-057-96 | DIODE D10SC6M-4012 | 40/46V2000 | |
| 960 | | G2A | DIODE | | D6201 | 8-719-057-96 | DIODE D10SC6M-4012 | 40/46V2000 | |
| 961 | | G2A | DIODE | | D6202 | 8-719-057-96 | DIODE D10SC6M-4012 | 40/46V2000 | |
| 962 | | G2A | DIODE | | D6203 | 8-719-057-96 | DIODE D10SC6M-4012 | 40/46V2000 | |
| 963 | | G2A | DIODE | | D6204 | 6-500-567-31 | DIODE 10ERB20-TB3 | 40/46V2000 | |
| 964 | | G2A | DIODE | | D6205 | 6-500-567-31 | DIODE 10ERB20-TB3 | 40/46V2000 | |
| 965 | | G2A | DIODE | | D6207 | 8-719-057-96 | DIODE D10SC6M-4012 | 40/46V2000 | |
| 966 | | G2A | DIODE | | D6208 | 8-719-057-96 | DIODE D10SC6M-4012 | 40/46V2000 | |
| 967 | | G2A | DIODE | | D6302 | 6-500-567-31 | DIODE 10ERB20-TB3 | 40/46V2000 | |
| 968 | | G2A | DIODE | | D6303 | 6-500-567-31 | DIODE 10ERB20-TB3 | 40/46V2000 | |
| 969 | | G2A | DIODE | | D6304 | 6-500-849-01 | DIODE ERA22-08KFLB | 40/46V2000 | |
| 970 | | G2A | DIODE | | D6305 | 6-500-567-31 | DIODE 10ERB20-TB3 | 40/46V2000 | |
| 971 | | G2A | DIODE | | D6306 | 8-719-510-02 | DIODE D1NS4 | 40/46V2000 | |
| 972 | | G2A | DIODE | | D6401 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 973 | | G2A | DIODE | | D6402 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 974 | | G2A | DIODE | | D6406 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 975 | | G2A | DIODE | | D6407 | 8-719-018-01 | DIODE MA8220-TX | 40/46V2000 | |
| 976 | | G2A | DIODE | | D6408 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 977 | | G2A | DIODE | | D6452 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 978 | | G2A | DIODE | | D6456 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 979 | | G2A | DIODE | | D6504 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 980 | | G2A | DIODE | | D6505 | 8-719-421-82 | DIODE MA8043-M | 40/46V2000 | |
| 981 | | G2A | DIODE | | D6506 | 8-719-054-59 | DIODE FSF05A60 | 40/46V2000 | |
| 982 | | G2A | DIODE | | D6507 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 983 | | G2A | DIODE | | D6508 | 6-500-108-01 | DIODE EP05FA20 | 40/46V2000 | |
| 984 | | G2A | DIODE | | D6509 | 6-500-108-01 | DIODE EP05FA20 | 40/46V2000 | |
| 985 | | G2A | DIODE | | D6510 | 6-500-137-01 | DIODE BAT54HT1 | 40/46V2000 | |
| 986 | | G2A | DIODE | | D6511 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 987 | | G2A | DIODE | | D6512 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 988 | | G2A | DIODE | | D6551 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 989 | | G2A | DIODE | | D6552 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 990 | | G2A | DIODE | | D6553 | 8-719-404-50 | DIODE MA111-TX | 40/46V2000 | |
| 991 | | G2A | FUSE | △ | F6000 | 1-576-233-51 | FUSE 6.3A 250V | 40/46V2000 | |
| 992 | | G2A | FERRITE BEAD | | FB6100 | 1-412-911-11 | FERRITE 0UH | 40/46V2000 | |
| 993 | | G2A | FERRITE BEAD | | FB6101 | 1-412-911-11 | FERRITE 0UH | 40/46V2000 | |
| 994 | | G2A | IC | | IC6100 | 6-707-749-01 | IC CXD9841P | 40/46V2000 | |
| 995 | | G2A | IC | | IC6200 | 6-709-368-01 | IC MM1431ATT (CN) | 40/46V2000 | |
| 996 | | G2A | IC | | IC6301 | 6-708-801-01 | IC MIP2H2 | 40/46V2000 | |
| 997 | | G2A | IC | | IC6302 | 6-709-442-01 | IC MM1530ATT | 40/46V2000 | |
| 998 | | G2A | IC | | IC6401 | 6-709-368-01 | IC MM1431ATT (CN) | 40/46V2000 | |
| 999 | | G2A | IC | | IC6402 | 6-709-368-01 | IC MM1431ATT (CN) | 40/46V2000 | |
| 1000 | | G2A | IC | | IC6502 | 6-709-192-01 | IC FA5501AN-D1-TE1 | 40/46V2000 | |
| 1001 | | G2A | JUMPER READ | | JR6001 | 1-216-295-91 | SHORT CHIP 0 | 40/46V2000 | |
| 1002 | | G2A | JUMPER READ | | JR6002 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1003 | | G2A | JUMPER READ | | JR6004 | 1-216-295-91 | SHORT CHIP 0 | 40/46V2000 | |
| 1004 | | G2A | JUMPER READ | | JR6005 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1005 | | G2A | JUMPER READ | | JR6006 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1006 | | G2A | JUMPER READ | | JR6007 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1007 | | G2A | JUMPER READ | | JR6008 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1008 | | G2A | JUMPER READ | | JR6009 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1009 | | G2A | JUMPER READ | | JR6010 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1010 | | G2A | JUMPER READ | | JR6011 | 1-216-295-91 | SHORT CHIP 0 | 40/46V2000 | |
| 1011 | | G2A | JUMPER READ | | JR6012 | 1-216-295-91 | SHORT CHIP 0 | 40/46V2000 | |
| 1012 | | G2A | JUMPER READ | | JR6013 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1013 | | G2A | JUMPER READ | | JR6014 | 1-216-296-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1014 | | G2A | COIL | | L6000 | 1-456-856-21 | LINE FILTER COIL | 40/46V2000 | |
| 1015 | | G2A | COIL | | L6203 | 1-414-487-41 | INDUCTOR 1UH | 40/46V2000 | |
| 1016 | | G2A | COIL | | L6204 | 1-414-487-41 | INDUCTOR 1UH | 40/46V2000 | |
| 1017 | | G2A | COIL | | L6207 | 1-457-239-11 | INDUCTOR 4.7UH | 40/46V2000 | |
| 1018 | | G2A | COIL | | L6208 | 1-457-239-11 | INDUCTOR 4.7UH | 40/46V2000 | |
| 1019 | | G2A | COIL | | L6300 | 1-414-183-41 | INDUCTOR 10UH | 40/46V2000 | |
| 1020 | | G2A | COIL | | L6500 | 1-457-218-11 | INDUCTOR 100UH | 40/46V2000 | |
| 1021 | | G2A | COIL | | L6502 | 1-457-141-21 | INDUCTOR 175UH | 40/46V2000 | |
| 1022 | | G2A | PHOTO COUPLER | △ | PH6000 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | 40/46V2000 | |
| 1023 | | G2A | PHOTO COUPLER | △ | PH6100 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | 40/46V2000 | |
| 1024 | | G2A | PHOTO COUPLER | △ | PH6301 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | 40/46V2000 | |
| 1025 | | G2A | PHOTO COUPLER | △ | PH6400 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | 40/46V2000 | |
| 1026 | | G2A | PHOTO COUPLER | △ | PH6401 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | 40/46V2000 | |
| 1027 | | G2A | PHOTO COUPLER | △ | PH6402 | 6-600-187-01 | PHOTO COUPLER PC123Y22JOOF | 40/46V2000 | |
| 1028 | | G2A | TRANSISTOR | | Q6051 | 8-729-045-62 | TRANSISTOR 2SK2158-T2B | 40/46V2000 | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|---------------|----------|--------------|-------------------------------------|------------|-----------|
| 1029 | | G2A | TRANSISTOR | | Q6100 | 6-551-297-01 | TRANSISTOR 2SK3568(LBS1SONY.Q | 40/46V2000 | |
| 1030 | | G2A | TRANSISTOR | | Q6101 | 6-551-297-01 | TRANSISTOR 2SK3568(LBS1SONY.Q | 40/46V2000 | |
| 1031 | | G2A | TRANSISTOR | | Q6400 | 8-729-804-41 | TRANSISTOR 2SB1122-S | 40/46V2000 | |
| 1032 | | G2A | TRANSISTOR | | Q6401 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | 40/46V2000 | |
| 1033 | | G2A | TRANSISTOR | | Q6402 | 8-729-045-62 | TRANSISTOR 2SK2158-T2B | 40/46V2000 | |
| 1034 | | G2A | TRANSISTOR | | Q6403 | 8-729-600-22 | TRANSISTOR 2SA1235-F | 40/46V2000 | |
| 1035 | | G2A | TRANSISTOR | | Q6404 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | 40/46V2000 | |
| 1036 | | G2A | TRANSISTOR | | Q6405 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | 40/46V2000 | |
| 1037 | | G2A | TRANSISTOR | | Q6406 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | 40/46V2000 | |
| 1038 | | G2A | TRANSISTOR | | Q6408 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | 40/46V2000 | |
| 1039 | | G2A | TRANSISTOR | | Q6409 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | 40/46V2000 | |
| 1040 | | G2A | TRANSISTOR | | Q6454 | 8-729-600-22 | TRANSISTOR 2SA1235-F | 40/46V2000 | |
| 1041 | | G2A | TRANSISTOR | | Q6455 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | 40/46V2000 | |
| 1042 | | G2A | TRANSISTOR | | Q6500 | 6-551-403-01 | TRANSISTOR 2SK3797(LBS1SONY. | 40/46V2000 | |
| 1043 | | G2A | TRANSISTOR | | Q6501 | 8-729-820-90 | TRANSISTOR 2SD1621-ST | 40/46V2000 | |
| 1044 | | G2A | TRANSISTOR | | Q6502 | 8-729-804-41 | TRANSISTOR 2SB1122-S | 40/46V2000 | |
| 1045 | | G2A | TRANSISTOR | | Q6504 | 6-551-403-01 | TRANSISTOR 2SK3797(LBS1SONY. | 40/46V2000 | |
| 1046 | | G2A | RESISTOR | | R6002 | 1-240-251-11 | METAL 6.8 5% 10W | 40/46V2000 | |
| 1047 | | G2A | RESISTOR | | R6003 | 1-247-752-11 | CARBON 1K 5% 1/2W | 40/46V2000 | |
| 1048 | | G2A | RESISTOR | | R6004 | 1-218-835-11 | METAL CHIP 330 0.5% 1/10W | 40/46V2000 | |
| 1049 | | G2A | RESISTOR | | R6051 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 40/46V2000 | |
| 1050 | | G2A | RESISTOR | | R6052 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | 40/46V2000 | |
| 1051 | | G2A | RESISTOR | | R6101 | 1-249-385-11 | CARBON 2.2 5% 1/4W | 40/46V2000 | |
| 1052 | | G2A | RESISTOR | | R6102 | 1-202-933-61 | Δ - Ω fi 0.1 10% 1/2W | 40/46V2000 | |
| 1053 | | G2A | RESISTOR | | R6103 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | 40/46V2000 | |
| 1054 | | G2A | RESISTOR | | R6104 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | 40/46V2000 | |
| 1055 | | G2A | RESISTOR | | R6105 | 1-208-854-11 | METAL CHIP 1M 0.5% 1/10W | 40/46V2000 | |
| 1056 | | G2A | RESISTOR | | R6106 | 1-208-854-11 | METAL CHIP 1M 0.5% 1/10W | 40/46V2000 | |
| 1057 | | G2A | RESISTOR | | R6107 | 1-208-854-11 | METAL CHIP 1M 0.5% 1/10W | 40/46V2000 | |
| 1058 | | G2A | RESISTOR | | R6108 | 1-208-854-11 | METAL CHIP 1M 0.5% 1/10W | 40/46V2000 | |
| 1059 | | G2A | RESISTOR | | R6109 | 1-218-761-11 | METAL CHIP 240K 0.5% 1/10W | 40/46V2000 | |
| 1060 | | G2A | RESISTOR | | R6110 | 1-218-881-11 | METAL CHIP 27K 0.5% 1/10W | 40/46V2000 | |
| 1061 | | G2A | RESISTOR | | R6111 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | 40/46V2000 | |
| 1062 | | G2A | RESISTOR | | R6114 | 1-211-985-11 | METAL CHIP 47 0.5% 1/10W | 40/46V2000 | |
| 1063 | | G2A | RESISTOR | | R6116 | 1-216-009-91 | RES-CHIP 22 5% 1/10W | 40/46V2000 | |
| 1064 | | G2A | RESISTOR | | R6117 | 1-216-009-91 | RES-CHIP 22 5% 1/10W | 40/46V2000 | |
| 1065 | | G2A | RESISTOR | | R6118 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1066 | | G2A | RESISTOR | | R6119 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1067 | | G2A | RESISTOR | | R6121 | 1-216-361-00 | METAL OXIDE 0.22 5% 2W | 40/46V2000 | |
| 1068 | | G2A | RESISTOR | | R6122 | 1-216-361-00 | METAL OXIDE 0.22 5% 2W | 40/46V2000 | |
| 1069 | | G2A | RESISTOR | | R6123 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | 40/46V2000 | |
| 1070 | | G2A | RESISTOR | | R6127 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | 40/46V2000 | |
| 1071 | | G2A | RESISTOR | | R6200 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 40/46V2000 | |
| 1072 | | G2A | RESISTOR | | R6201 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 40/46V2000 | |
| 1073 | | G2A | RESISTOR | | R6202 | 1-216-105-91 | RES-CHIP 220K 5% 1/10W | 40/46V2000 | |
| 1074 | | G2A | RESISTOR | | R6203 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | 40/46V2000 | |
| 1075 | | G2A | RESISTOR | | R6204 | 1-218-843-11 | METAL CHIP 680 0.5% 1/10W | 40/46V2000 | |
| 1076 | | G2A | RESISTOR | | R6205 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | 40/46V2000 | |
| 1077 | | G2A | RESISTOR | | R6207 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | 40/46V2000 | |
| 1078 | | G2A | RESISTOR | | R6208 | 1-249-377-11 | CARBON 0.47 5% 1/4W | 40/46V2000 | |
| 1079 | | G2A | RESISTOR | | R6226 | 1-249-389-11 | CARBON 4.7 5% 1/4W | 40/46V2000 | |
| 1080 | | G2A | RESISTOR | | R6300 | 1-212-958-00 | FUSIBLE 10 5% 1/2W | 40/46V2000 | |
| 1081 | | G2A | RESISTOR | | R6301 | 1-243-725-71 | METAL OXIDE 100K 5% 1W | 40/46V2000 | |
| 1082 | | G2A | RESISTOR | | R6302 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | 40/46V2000 | |
| 1083 | | G2A | RESISTOR | | R6303 | 1-249-385-11 | CARBON 2.2 5% 1/4W | 40/46V2000 | |
| 1084 | | G2A | RESISTOR | | R6304 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 40/46V2000 | |
| 1085 | | G2A | RESISTOR | | R6305 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | 40/46V2000 | |
| 1086 | | G2A | RESISTOR | | R6306 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | 40/46V2000 | |
| 1087 | | G2A | RESISTOR | | R6307 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | 40/46V2000 | |
| 1088 | | G2A | RESISTOR | | R6308 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | 40/46V2000 | |
| 1089 | | G2A | RESISTOR | | R6309 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | 40/46V2000 | |
| 1090 | | G2A | RESISTOR | | R6400 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1091 | | G2A | RESISTOR | | R6401 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | 40/46V2000 | |
| 1092 | | G2A | RESISTOR | | R6402 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1093 | | G2A | RESISTOR | | R6403 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | 40/46V2000 | |
| 1094 | | G2A | RESISTOR | | R6405 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | 40/46V2000 | |
| 1095 | | G2A | RESISTOR | | R6407 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | 40/46V2000 | |
| 1096 | | G2A | RESISTOR | | R6408 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | 40/46V2000 | |
| 1097 | | G2A | RESISTOR | | R6409 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1098 | | G2A | RESISTOR | | R6410 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 40/46V2000 | |
| 1099 | | G2A | RESISTOR | | R6412 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1100 | | G2A | RESISTOR | | R6413 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | 40/46V2000 | |
| 1101 | | G2A | RESISTOR | | R6414 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1102 | | G2A | RESISTOR | | R6415 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-------------|-----|----------|--------------|-----------------------------|------------|-----------|
| 1103 | | G2A | RESISTOR | | R6416 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | 40/46V2000 | |
| 1104 | | G2A | RESISTOR | | R6417 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 40/46V2000 | |
| 1105 | | G2A | RESISTOR | | R6418 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | 40/46V2000 | |
| 1106 | | G2A | RESISTOR | | R6419 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | 40/46V2000 | |
| 1107 | | G2A | RESISTOR | | R6420 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1108 | | G2A | RESISTOR | | R6421 | 1-216-864-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1109 | | G2A | RESISTOR | | R6422 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | 40/46V2000 | |
| 1110 | | G2A | RESISTOR | | R6425 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | 40/46V2000 | |
| 1111 | | G2A | RESISTOR | | R6426 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | 40/46V2000 | |
| 1112 | | G2A | RESISTOR | | R6427 | 1-218-889-11 | METAL CHIP 56K 0.5% 1/10W | 40/46V2000 | |
| 1113 | | G2A | RESISTOR | | R6436 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | 40/46V2000 | |
| 1114 | | G2A | RESISTOR | | R6437 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 40/46V2000 | |
| 1115 | | G2A | RESISTOR | | R6441 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | 40/46V2000 | |
| 1116 | | G2A | RESISTOR | | R6442 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1117 | | G2A | RESISTOR | | R6443 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1118 | | G2A | RESISTOR | | R6444 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1119 | | G2A | RESISTOR | | R6451 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1120 | | G2A | RESISTOR | | R6452 | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W | 40/46V2000 | |
| 1121 | | G2A | RESISTOR | | R6453 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1122 | | G2A | RESISTOR | | R6454 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | 40/46V2000 | |
| 1123 | | G2A | RESISTOR | | R6455 | 1-218-903-11 | METAL CHIP 220K 0.5% 1/10W | 40/46V2000 | |
| 1124 | | G2A | RESISTOR | | R6456 | 1-218-859-11 | METAL CHIP 3.3K 0.5% 1/10W | 40/46V2000 | |
| 1125 | | G2A | RESISTOR | | R6459 | 1-218-885-11 | METAL CHIP 39K 0.5% 1/10W | 40/46V2000 | |
| 1126 | | G2A | RESISTOR | | R6461 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1127 | | G2A | RESISTOR | | R6462 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1128 | | G2A | RESISTOR | | R6468 | 1-218-903-11 | METAL CHIP 220K 0.5% 1/10W | 40/46V2000 | |
| 1129 | | G2A | RESISTOR | | R6503 | 1-215-882-00 | METAL OXIDE 22 5% 2W | 40/46V2000 | |
| 1130 | | G2A | RESISTOR | | R6512 | 1-218-907-11 | METAL CHIP 330K 0.5% 1/10W | 40/46V2000 | |
| 1131 | | G2A | RESISTOR | | R6513 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | 40/46V2000 | |
| 1132 | | G2A | RESISTOR | | R6514 | 1-218-895-11 | METAL CHIP 100K 0.5% 1/10W | 40/46V2000 | |
| 1133 | | G2A | RESISTOR | | R6515 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | 40/46V2000 | |
| 1134 | | G2A | RESISTOR | | R6526 | 1-211-989-11 | METAL CHIP 68 0.5% 1/10W | 40/46V2000 | |
| 1135 | | G2A | RESISTOR | | R6527 | 1-218-913-91 | METAL CHIP 560K 0.5% 1/10W | 40/46V2000 | |
| 1136 | | G2A | RESISTOR | | R6528 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | 40/46V2000 | |
| 1137 | | G2A | RESISTOR | | R6529 | 1-216-864-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1138 | | G2A | RESISTOR | | R6530 | 1-219-729-61 | METAL 0.33 10% 5W | 40/46V2000 | |
| 1139 | | G2A | RESISTOR | | R6531 | 1-219-729-61 | METAL 0.33 10% 5W | 40/46V2000 | |
| 1140 | | G2A | RESISTOR | | R6532 | 1-216-864-11 | SHORT CHIP 0 | 40/46V2000 | |
| 1141 | | G2A | RESISTOR | | R6533 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1142 | | G2A | RESISTOR | | R6534 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | 40/46V2000 | |
| 1143 | | G2A | RESISTOR | | R6535 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1144 | | G2A | RESISTOR | | R6536 | 1-218-830-11 | METAL CHIP 200 0.5% 1/10W | 40/46V2000 | |
| 1145 | | G2A | RESISTOR | | R6537 | 1-249-389-11 | CARBON 4.7 5% 1/4W | 40/46V2000 | |
| 1146 | | G2A | RESISTOR | | R6538 | 1-249-405-11 | CARBON 100 5% 1/4W | 40/46V2000 | |
| 1147 | | G2A | RESISTOR | | R6539 | 1-218-830-11 | METAL CHIP 200 0.5% 1/10W | 40/46V2000 | |
| 1148 | | G2A | RESISTOR | | R6540 | 1-249-389-11 | CARBON 4.7 5% 1/4W | 40/46V2000 | |
| 1149 | | G2A | RESISTOR | | R6541 | 1-208-818-11 | METAL CHIP 33K 0.5% 1/10W | 40/46V2000 | |
| 1150 | | G2A | RESISTOR | | R6542 | 1-208-814-91 | METAL CHIP 22K 0.5% 1/10W | 40/46V2000 | |
| 1151 | | G2A | RESISTOR | | R6543 | 1-218-830-11 | METAL CHIP 200 0.5% 1/10W | 40/46V2000 | |
| 1152 | | G2A | RESISTOR | | R6544 | 1-218-830-11 | METAL CHIP 200 0.5% 1/10W | 40/46V2000 | |
| 1153 | | G2A | RESISTOR | | R6545 | 1-208-848-11 | METAL CHIP 560K 0.5% 1/10W | 40/46V2000 | |
| 1154 | | G2A | RESISTOR | | R6546 | 1-208-848-11 | METAL CHIP 560K 0.5% 1/10W | 40/46V2000 | |
| 1155 | | G2A | RESISTOR | | R6547 | 1-208-848-11 | METAL CHIP 560K 0.5% 1/10W | 40/46V2000 | |
| 1156 | | G2A | RESISTOR | | R6548 | 1-208-846-11 | METAL CHIP 470K 0.5% 1/10W | 40/46V2000 | |
| 1157 | | G2A | RESISTOR | | R6549 | 1-208-844-11 | METAL CHIP 390K 0.5% 1/10W | 40/46V2000 | |
| 1158 | | G2A | RESISTOR | | R6550 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | 40/46V2000 | |
| 1159 | | G2A | RESISTOR | | R6551 | 1-249-393-11 | CARBON 10 5% 1/4W | 40/46V2000 | |
| 1160 | | G2A | RESISTOR | | R6552 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | 40/46V2000 | |
| 1161 | | G2A | RESISTOR | | R6553 | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W | 40/46V2000 | |
| 1162 | | G2A | RESISTOR | | R6554 | 1-218-911-11 | METAL CHIP 470K 0.5% 1/10W | 40/46V2000 | |
| 1163 | | G2A | RESISTOR | | R6555 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | 40/46V2000 | |
| 1164 | | G2A | RESISTOR | | R6557 | 1-218-851-11 | METAL CHIP 1.5K 0.5% 1/10W | 40/46V2000 | |
| 1165 | | G2A | RESISTOR | | R6560 | 1-218-911-11 | METAL CHIP 470K 0.5% 1/10W | 40/46V2000 | |
| 1166 | | G2A | RESISTOR | | R6562 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | 40/46V2000 | |
| 1167 | | G2A | RESISTOR | | R6563 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | 40/46V2000 | |
| 1168 | | G2A | RESISTOR | | R6564 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | 40/46V2000 | |
| 1169 | | G2A | RESISTOR | | R6565 | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W | 40/46V2000 | |
| 1170 | | G2A | RESISTOR | | R6566 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | 40/46V2000 | |
| 1171 | | G2A | RELAY | △ | RY6003 | 1-755-579-11 | RELAY, POWER | 40/46V2000 | |
| 1172 | | G2A | TRANSFORMER | △ | T6102 | 1-443-983-11 | CONVERTER TRANSFORMER (PIT) | 40/46V2000 | |
| 1173 | | G2A | TRANSFORMER | △ | T6103 | 1-443-982-11 | CONVERTER TRANSFORMER (PIT) | 40/46V2000 | |
| 1174 | | G2A | TRANSFORMER | △ | T6301 | 1-443-984-11 | CONVERTER TRANSFORMER (SBT) | 40/46V2000 | |
| 1175 | | G2A | VARISTOR | | VD6000 | 1-804-996-21 | VARISTOR | 40/46V2000 | |
| 1176 | | G2A | VARISTOR | | VD6001 | 1-804-996-21 | VARISTOR | 40/46V2000 | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|---------------|----------|--------------|----------------------------------|-----------|-----------|
| 1177 | | AG | CAPACITOR | | C2013 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 1178 | | AG | CAPACITOR | | C2015 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 1179 | | AG | CAPACITOR | | C2016 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1180 | | AG | CAPACITOR | | C2017 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1181 | | AG | CAPACITOR | | C2018 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 1182 | | AG | CAPACITOR | | C2019 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1183 | | AG | CAPACITOR | | C2020 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 1184 | | AG | CAPACITOR | | C2021 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 1185 | | AG | CAPACITOR | | C2023 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 1186 | | AG | CAPACITOR | | C2024 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1187 | | AG | CAPACITOR | | C2025 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1188 | | AG | CAPACITOR | | C2026 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1189 | | AG | CAPACITOR | | C2030 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1190 | | AG | CAPACITOR | | C6001 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1191 | | AG | CAPACITOR | | C6003 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 1192 | | AG | CAPACITOR | | C6005 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | | |
| 1193 | | AG | CAPACITOR | | C6006 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1194 | | AG | CAPACITOR | | C6009 | 1-100-743-91 | CERAMIC CHIP 2.2UF 20% 16V | | |
| 1195 | | AG | CAPACITOR | | C6011 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1196 | | AG | CAPACITOR | | C6014 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 1197 | | AG | CAPACITOR | | C6015 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1198 | | AG | CAPACITOR | | C6016 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | | |
| 1199 | | AG | CAPACITOR | | C6017 | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1200 | | AG | CAPACITOR | | C6018 | 1-100-743-91 | CERAMIC CHIP 2.2UF 20% 16V | | |
| 1201 | | AG | CAPACITOR | | C6019 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1202 | | AG | CAPACITOR | | C6020 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 1203 | | AG | CAPACITOR | | C6022 | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V | | |
| 1204 | | AG | CAPACITOR | | C6023 | 1-128-995-21 | ELECT CHIP 100UF 20% 10V | | |
| 1205 | | AG | CAPACITOR | | C6024 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1206 | | AG | CAPACITOR | | C6025 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1207 | | AG | CAPACITOR | | C6026 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1208 | | AG | CAPACITOR | | C6027 | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 1209 | | AG | CAPACITOR | | C7004 | 1-162-906-11 | CERAMIC CHIP 1.5PF 0.25PF 50V | | |
| 1210 | | AG | CAPACITOR | | C7005 | 1-162-906-11 | CERAMIC CHIP 1.5PF 0.25PF 50V | | |
| 1211 | | AG | CAPACITOR | | C7007 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 1212 | | AG | CAPACITOR | | C7010 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1213 | | AG | CAPACITOR | | C7011 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1214 | | AG | CAPACITOR | | C7012 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1215 | | AG | CAPACITOR | | C7013 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1216 | | AG | CAPACITOR | | C7014 | 1-162-962-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 1217 | | AG | CAPACITOR | | C7015 | 1-162-960-11 | CERAMIC CHIP 220PF 10.00% 50V | | |
| 1218 | | AG | CAPACITOR | | C7017 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1219 | | AG | CAPACITOR | | C7018 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1220 | | AG | CAPACITOR | | C7019 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1221 | | AG | CAPACITOR | | C7020 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1222 | | AG | CAPACITOR | | C7021 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1223 | | AG | CAPACITOR | | C7023 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1224 | | AG | CAPACITOR | | C7024 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1225 | | AG | CAPACITOR | | C7025 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1226 | | AG | CAPACITOR | | C7027 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1227 | | AG | CAPACITOR | | C7028 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1228 | | AG | CAPACITOR | | C7029 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1229 | | AG | CAPACITOR | | C7030 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1230 | | AG | CAPACITOR | | C7033 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1231 | | AG | CAPACITOR | | C7034 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1232 | | AG | CAPACITOR | | C7035 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1233 | | AG | CAPACITOR | | C7036 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1234 | | AG | CAPACITOR | | C7037 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1235 | | AG | CAPACITOR | | C7038 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1236 | | AG | CAPACITOR | | C7039 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1237 | | AG | CAPACITOR | | C7040 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1238 | | AG | CAPACITOR | | C7042 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1239 | | AG | CAPACITOR | | C7043 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1240 | | AG | CAPACITOR | | C7044 | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1241 | | AG | CAPACITOR | | C7045 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1242 | | AG | CAPACITOR | | C7046 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1243 | | AG | CAPACITOR | | C7047 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1244 | | AG | CAPACITOR | | C7048 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1245 | | AG | CAPACITOR | | C7049 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1246 | | AG | CAPACITOR | | C7050 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1247 | | AG | CAPACITOR | | C7051 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1248 | | AG | CAPACITOR | | C7052 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1249 | | AG | CAPACITOR | | C7053 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1250 | | AG | CAPACITOR | | C7054 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|--------------|----------|--------------|----------------------------------|-----------|-----------|
| 1251 | | AG | CAPACITOR | | C7055 | 1-100-566-91 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1252 | | AG | CAPACITOR | | C7056 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1253 | | AG | CAPACITOR | | C7057 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1254 | | AG | CAPACITOR | | C7060 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1255 | | AG | CAPACITOR | | C7061 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1256 | | AG | CAPACITOR | | C7062 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1257 | | AG | CAPACITOR | | C7063 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1258 | | AG | CAPACITOR | | C7064 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1259 | | AG | CAPACITOR | | C7065 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1260 | | AG | CAPACITOR | | C7072 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 1261 | | AG | CAPACITOR | | C7073 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1262 | | AG | CAPACITOR | | C7075 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 1263 | | AG | CAPACITOR | | C7076 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 1264 | | AG | CAPACITOR | | C7082 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1265 | | AG | CAPACITOR | | C7083 | 1-115-340-11 | CERAMIC CHIP 0.22UF 10.00% 25V | | |
| 1266 | | AG | CAPACITOR | | C7086 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 1267 | | AG | CAPACITOR | | C7087 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 1268 | | AG | CAPACITOR | | C7088 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1269 | | AG | CAPACITOR | | C7089 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1270 | | AG | CAPACITOR | | C7090 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1271 | | AG | CAPACITOR | | C7091 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1272 | | AG | CAPACITOR | | C7092 | 1-162-965-11 | CERAMIC CHIP 0.0015UF 10.00% 50V | | |
| 1273 | | AG | CAPACITOR | | C7093 | 1-164-217-11 | CERAMIC CHIP 150PF 5.00% 50V | | |
| 1274 | | AG | CAPACITOR | | C7094 | 1-164-217-11 | CERAMIC CHIP 150PF 5.00% 50V | | |
| 1275 | | AG | CAPACITOR | | C7095 | 1-162-965-11 | CERAMIC CHIP 0.0015UF 10.00% 50V | | |
| 1276 | | AG | CAPACITOR | | C7096 | 1-162-965-11 | CERAMIC CHIP 0.0015UF 10.00% 50V | | |
| 1277 | | AG | CAPACITOR | | C7097 | 1-164-217-11 | CERAMIC CHIP 150PF 5.00% 50V | | |
| 1278 | | AG | CAPACITOR | | C7098 | 1-164-217-11 | CERAMIC CHIP 150PF 5.00% 50V | | |
| 1279 | | AG | CAPACITOR | | C7099 | 1-162-965-11 | CERAMIC CHIP 0.0015UF 10.00% 50V | | |
| 1280 | | AG | CAPACITOR | | C7100 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1281 | | AG | CAPACITOR | | C7101 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1282 | | AG | CAPACITOR | | C7102 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1283 | | AG | CAPACITOR | | C7103 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1284 | | AG | CAPACITOR | | C7104 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1285 | | AG | CAPACITOR | | C7105 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1286 | | AG | CAPACITOR | | C7106 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1287 | | AG | CAPACITOR | | C7107 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1288 | | AG | CAPACITOR | | C7108 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1289 | | AG | CAPACITOR | | C7109 | 1-162-959-11 | CERAMIC CHIP 330PF 5.00% 50V | | |
| 1290 | | AG | CAPACITOR | | C7110 | 1-162-959-11 | CERAMIC CHIP 330PF 5.00% 50V | | |
| 1291 | | AG | CAPACITOR | | C7111 | 1-162-959-11 | CERAMIC CHIP 330PF 5.00% 50V | | |
| 1292 | | AG | CAPACITOR | | C7112 | 1-162-959-11 | CERAMIC CHIP 330PF 5.00% 50V | | |
| 1293 | | AG | CAPACITOR | | C7113 | 1-112-797-11 | ELECT CHIP 470UF 20% 25V | | |
| 1294 | | AG | CAPACITOR | | C7114 | 1-112-800-11 | ELECT CHIP 100UF 20% 35V | | |
| 1295 | | AG | CAPACITOR | | C7115 | 1-112-800-11 | ELECT CHIP 100UF 20% 35V | | |
| 1296 | | AG | CAPACITOR | | C7116 | 1-112-800-11 | ELECT CHIP 100UF 20% 35V | | |
| 1297 | | AG | CAPACITOR | | C7117 | 1-112-800-11 | ELECT CHIP 100UF 20% 35V | | |
| 1298 | | AG | CAPACITOR | | C7118 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 1299 | | AG | CAPACITOR | | C7119 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 1300 | | AG | CAPACITOR | | C7120 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 1301 | | AG | CAPACITOR | | C7121 | 1-100-912-11 | CERAMIC CHIP 1UF 10% 25V | | |
| 1302 | | AG | CAPACITOR | | C7123 | 1-125-827-91 | CERAMIC CHIP 1UF 10.00% 25V | | |
| 1303 | | AG | CAPACITOR | | C7124 | 1-125-827-91 | CERAMIC CHIP 1UF 10.00% 25V | | |
| 1304 | | AG | CAPACITOR | | C7125 | 1-125-827-91 | CERAMIC CHIP 1UF 10.00% 25V | | |
| 1305 | | AG | CAPACITOR | | C7126 | 1-125-827-91 | CERAMIC CHIP 1UF 10.00% 25V | | |
| 1306 | | AG | CAPACITOR | | C7127 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 1307 | | AG | CAPACITOR | | C7128 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 1308 | | AG | CAPACITOR | | C7147 | 1-100-591-91 | CERAMIC CHIP 1UF 10% 25V | | |
| 1309 | | AG | CAPACITOR | | C7148 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1310 | | AG | CAPACITOR | | C7600 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1311 | | AG | CAPACITOR | | C7601 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1312 | | AG | CAPACITOR | | C7602 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1313 | | AG | CAPACITOR | | C7603 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1314 | | AG | CAPACITOR | | C7604 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1315 | | AG | CAPACITOR | | C7605 | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1316 | | AG | CAPACITOR | | C7609 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1317 | | AG | CAPACITOR | | C7610 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1318 | | AG | CAPACITOR | | C7611 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1319 | | AG | CAPACITOR | | C7612 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1320 | | AG | CAPACITOR | | C7613 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1321 | | AG | CAPACITOR | | C7614 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1322 | | AG | CAPACITOR | | C7615 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1323 | | AG | CAPACITOR | | C7616 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1324 | | AG | CAPACITOR | | C7617 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|--------------|---------------|----------|--------------|--------------------------------|-----------|-----------|
| 1325 | | AG | CAPACITOR | | C7618 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1326 | | AG | CAPACITOR | | C7619 | 1-100-597-91 | CERAMIC CHIP 0.1UF 10% 25V | | |
| 1327 | | AG | CAPACITOR | | C9005 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1328 | | AG | CAPACITOR | | C9008 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1329 | | AG | CAPACITOR | | C9014 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1330 | | AG | CAPACITOR | | C9015 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1331 | | AG | CAPACITOR | | C9016 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1332 | | AG | CAPACITOR | | C9019 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1333 | | AG | CAPACITOR | | C9020 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1334 | | AG | CAPACITOR | | C9021 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1335 | | AG | CAPACITOR | | C9022 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1336 | | AG | CAPACITOR | | C9023 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1337 | | AG | CAPACITOR | | C9024 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1338 | | AG | CAPACITOR | | C9032 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1339 | | AG | CAPACITOR | | C9302 | 1-128-396-11 | ELECT CHIP 470UF 20% 10V | | |
| 1340 | | AG | CAPACITOR | | C9307 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1341 | | AG | CAPACITOR | | C9308 | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1342 | | AG | CAPACITOR | | C9309 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1343 | | AG | CAPACITOR | | C9310 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1344 | | AG | CAPACITOR | | C9311 | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V | | |
| 1345 | | AG | CAPACITOR | | C9501 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1346 | | AG | CAPACITOR | | C9502 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1347 | | AG | CAPACITOR | | C9512 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1348 | | AG | CAPACITOR | | C9700 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1349 | | AG | CAPACITOR | | C9701 | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1350 | | AG | CAPACITOR | | C9702 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1351 | | AG | CAPACITOR | | C9704 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1352 | | AG | CAPACITOR | | C9706 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1353 | | AG | CAPACITOR | | C9707 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1354 | | AG | CAPACITOR | | C9708 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1355 | | AG | CAPACITOR | | C9709 | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1356 | | AG | CONNECTOR | | CN7000 | 1-819-461-11 | HEADER ASSEMBLY FOR PWB 4P | | |
| 1357 | | AG | CONNECTOR | | CN7001 | 1-780-148-11 | CLIP, SHIELD | | |
| 1358 | | AG | CONNECTOR | | CN7002 | 1-780-148-11 | CLIP, SHIELD | | |
| 1359 | | AG | CONNECTOR | | CN7503 | 1-820-211-11 | HEADER ASSEMBLY FOR PWB 5P | | |
| 1360 | | AG | CONNECTOR | | CN9001 | 1-820-192-11 | HEADER ASSEMBLY (PRINT PWB)15P | | |
| 1361 | | AG | CONNECTOR | | CN9501 | 1-819-390-51 | FFC/FPC CONNECTOR (ZIF) 49P | | |
| 1362 | | AG | CONNECTOR | | CN9502 | 1-820-186-11 | HEADER ASSEMBLY (PRINT PWB) 9P | | |
| 1363 | | AG | CONNECTOR | | CN9521 | 1-780-336-11 | EARTH TERMINAL | | |
| 1364 | | AG | CONNECTOR | | CN9522 | 1-780-336-11 | EARTH TERMINAL | | |
| 1365 | | AG | CONNECTOR | | CN9523 | 1-780-336-11 | EARTH TERMINAL | | |
| 1366 | | AG | CONNECTOR | | CN9700 | 1-819-476-11 | HEADER ASSEMBLY FOR PWB 8P | | |
| 1367 | | AG | CONNECTOR | * | CN9701 | 1-818-714-21 | HEADER ASSEMBLY 20P | | |
| 1368 | | AG | CONNECTOR | | CN9702 | 1-820-183-11 | HEADER ASSEMBLY (PRINT PWB) 6P | | |
| 1369 | | AG | DIODE | | D6001 | 8-719-058-24 | DIODE RB501V-40TE-17 | | |
| 1370 | | AG | DIODE | | D7001 | 6-500-551-01 | DIODE MM3Z11VT1 | | |
| 1371 | | AG | DIODE | | D7004 | 8-719-050-37 | DIODE M1MA152WA-T1 | | |
| 1372 | | AG | DIODE | | D7005 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1373 | | AG | DIODE | | D7006 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1374 | | AG | DIODE | | D7007 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1375 | | AG | DIODE | | D7009 | 6-500-884-01 | DIODE P6SMBJ30A-5 | | |
| 1376 | | AG | DIODE | | D7010 | 6-500-884-01 | DIODE P6SMBJ30A-5 | | |
| 1377 | | AG | DIODE | | D7011 | 6-500-884-01 | DIODE P6SMBJ30A-5 | | |
| 1378 | | AG | DIODE | | D7012 | 6-500-884-01 | DIODE P6SMBJ30A-5 | | |
| 1379 | | AG | DIODE | | D7013 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1380 | | AG | DIODE | | D7602 | 8-719-050-37 | DIODE M1MA152WA-T1 | | |
| 1381 | | AG | DIODE | | D7603 | 8-719-050-37 | DIODE M1MA152WA-T1 | | |
| 1382 | | AG | DIODE | | D7604 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1383 | | AG | DIODE | | D7605 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1384 | | AG | DIODE | | D9003 | 8-719-977-28 | DIODE DTZ10B | | |
| 1385 | | AG | DIODE | | D9004 | 8-719-977-28 | DIODE DTZ10B | | |
| 1386 | | AG | DIODE | | D9008 | 8-719-977-28 | DIODE DTZ10B | | |
| 1387 | | AG | DIODE | | D9009 | 8-719-977-28 | DIODE DTZ10B | | |
| 1388 | | AG | DIODE | | D9012 | 8-719-977-28 | DIODE DTZ10B | | |
| 1389 | | AG | DIODE | | D9013 | 8-719-977-28 | DIODE DTZ10B | | |
| 1390 | | AG | DIODE | | D9014 | 8-719-977-28 | DIODE DTZ10B | | |
| 1391 | | AG | DIODE | | D9015 | 8-719-977-28 | DIODE DTZ10B | | |
| 1392 | | AG | DIODE | | D9016 | 8-719-977-28 | DIODE DTZ10B | | |
| 1393 | | AG | DIODE | | D9017 | 8-719-977-28 | DIODE DTZ10B | | |
| 1394 | | AG | DIODE | | D9018 | 8-719-977-28 | DIODE DTZ10B | | |
| 1395 | | AG | DIODE | | D9305 | 8-719-050-37 | DIODE M1MA152WA-T1 | | |
| 1396 | | AG | DIODE | | D9306 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1397 | | AG | FERRITE BEAD | | FB7000 | 1-400-089-21 | FERRITE 0UH | | |
| 1398 | | AG | FERRITE BEAD | | FB7001 | 1-400-089-21 | FERRITE 0UH | | |

| No. | # | Board | Type | △/△* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|--------------|------|----------|--------------|------------------------------|-----------|-----------|
| 1399 | | AG | FERRITE BEAD | | FB7002 | 1-400-089-21 | FERRITE 0UH | | |
| 1400 | | AG | FERRITE BEAD | | FB7003 | 1-400-089-21 | FERRITE 0UH | | |
| 1401 | | AG | FERRITE BEAD | | FB7004 | 1-400-040-22 | FERRITE 0UH | | |
| 1402 | | AG | FERRITE BEAD | | FB7005 | 1-400-040-22 | FERRITE 0UH | | |
| 1403 | | AG | FERRITE BEAD | | FB9003 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1404 | | AG | FERRITE BEAD | | FB9100 | 1-400-089-21 | FERRITE 0UH | | |
| 1405 | | AG | FERRITE BEAD | | FB9101 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1406 | | AG | FERRITE BEAD | | FB9700 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1407 | | AG | FERRITE BEAD | | FB9701 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1408 | | AG | FERRITE BEAD | | FB9702 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1409 | | AG | FERRITE BEAD | | FB9703 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1410 | | AG | FERRITE BEAD | | FB9704 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1411 | | AG | FERRITE BEAD | | FB9706 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1412 | | AG | IC | | IC2001 | 8-752-089-33 | IC CXA2069Q-TL | | |
| 1413 | | AG | IC | | IC7001 | 6-709-191-01 | IC MSP4410K-QA-D6-501 | | |
| 1414 | | AG | IC | | IC7003 | 8-759-278-58 | IC NJM4558V-TE2 | | |
| 1415 | | AG | IC | | IC7007 | 6-709-285-01 | IC M61571AFP-DF0T | | |
| 1416 | | AG | IC | | IC7601 | 8-759-278-58 | IC NJM4558V-TE2 | | |
| 1417 | | AG | IC | | IC7602 | 8-759-359-49 | IC NJM3414AV(TE2) | | |
| 1418 | | AG | IC | | IC9700 | 6-704-353-01 | IC SN74LVC2G34DCKR | | |
| 1419 | | AG | JACK | | J9001 | 1-780-271-11 | S CONNECTOR BLOCK | | |
| 1420 | | AG | JACK | | J9003 | 1-780-373-11 | TERMINAL BOARD | | |
| 1421 | | AG | JACK | | J9004 | 1-819-354-11 | PHONO JACK 5P | | |
| 1422 | | AG | JACK | | J9301 | 1-819-387-11 | PHONO JACK 3P | | |
| 1423 | | AG | COIL | | L2002 | 1-469-557-21 | INDUCTOR 22UH | | |
| 1424 | | AG | COIL | | L2003 | 1-469-555-21 | INDUCTOR 10UH | | |
| 1425 | | AG | COIL | | L6001 | 1-469-555-21 | INDUCTOR 10UH | | |
| 1426 | | AG | COIL | | L7002 | 1-400-794-21 | FERRITE 0UH | | |
| 1427 | | AG | COIL | | L7004 | 1-400-794-21 | FERRITE 0UH | | |
| 1428 | | AG | COIL | | L7005 | 1-469-555-21 | INDUCTOR 10UH | | |
| 1429 | | AG | COIL | | L7006 | 1-400-794-21 | FERRITE 0UH | | |
| 1430 | | AG | COIL | | L7007 | 1-469-555-21 | INDUCTOR 10UH | | |
| 1431 | | AG | COIL | | L7008 | 1-481-083-11 | INDUCTOR 22UH | | |
| 1432 | | AG | COIL | | L7009 | 1-457-191-11 | INDUCTOR 10UH | | |
| 1433 | | AG | COIL | | L7010 | 1-457-191-11 | INDUCTOR 10UH | | |
| 1434 | | AG | COIL | | L7011 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1435 | | AG | COIL | | L7012 | 1-400-794-21 | FERRITE 0UH | | |
| 1436 | | AG | COIL | | L7013 | 1-400-794-21 | FERRITE 0UH | | |
| 1437 | | AG | COIL | | L9301 | 1-469-555-21 | INDUCTOR 10UH | | |
| 1438 | | AG | COIL | | L9503 | 1-400-178-21 | FERRITE 0UH | | |
| 1439 | | AG | COIL | | L9504 | 1-400-178-21 | FERRITE 0UH | | |
| 1440 | | AG | COIL | | L9505 | 1-400-178-21 | FERRITE 0UH | | |
| 1441 | | AG | COIL | | L9606 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1442 | | AG | COIL | | L9700 | 1-469-555-21 | INDUCTOR 10UH | | |
| 1443 | | AG | COIL | | L9701 | 1-469-555-21 | INDUCTOR 10UH | | |
| 1444 | | AG | IC LINK | △ | PS7001 | 1-576-958-21 | FUSE 4A 24V | | |
| 1445 | | AG | TRANSISTOR | | Q2001 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1446 | | AG | TRANSISTOR | | Q2002 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1447 | | AG | TRANSISTOR | | Q2003 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1448 | | AG | TRANSISTOR | | Q6001 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1449 | | AG | TRANSISTOR | | Q6002 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1450 | | AG | TRANSISTOR | | Q6004 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1451 | | AG | TRANSISTOR | | Q6005 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1452 | | AG | TRANSISTOR | | Q6007 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1453 | | AG | TRANSISTOR | | Q6008 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1454 | | AG | TRANSISTOR | | Q6009 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1455 | | AG | TRANSISTOR | | Q6011 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1456 | | AG | TRANSISTOR | | Q6012 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1457 | | AG | TRANSISTOR | | Q6013 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1458 | | AG | TRANSISTOR | | Q7000 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1459 | | AG | TRANSISTOR | | Q7001 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1460 | | AG | TRANSISTOR | | Q7002 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1461 | | AG | TRANSISTOR | | Q7005 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1462 | | AG | TRANSISTOR | | Q7007 | 8-729-029-14 | TRANSISTOR DTC144EUA-T106 | | |
| 1463 | | AG | TRANSISTOR | | Q7008 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1464 | | AG | TRANSISTOR | | Q7009 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1465 | | AG | TRANSISTOR | | Q7010 | 8-729-029-14 | TRANSISTOR DTC144EUA-T106 | | |
| 1466 | | AG | TRANSISTOR | | Q7011 | 8-729-029-14 | TRANSISTOR DTC144EUA-T106 | | |
| 1467 | | AG | TRANSISTOR | | Q7012 | 8-729-141-73 | TRANSISTOR 2SC3624A-T1L15L16 | | |
| 1468 | | AG | TRANSISTOR | | Q7013 | 8-729-141-73 | TRANSISTOR 2SC3624A-T1L15L16 | | |
| 1469 | | AG | TRANSISTOR | | Q7014 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1470 | | AG | TRANSISTOR | | Q7015 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1471 | | AG | TRANSISTOR | | Q7016 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1472 | | AG | TRANSISTOR | | Q7017 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |

| No. | # | Board | Type | Δ/\wedge | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-----------------|----------|--------------|------------------------------|-----------|-----------|
| 1473 | | AG | TRANSISTOR | | Q7018 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1474 | | AG | TRANSISTOR | | Q7019 | 8-729-029-14 | TRANSISTOR DTC144EUA-T106 | | |
| 1475 | | AG | TRANSISTOR | | Q7020 | 8-729-029-14 | TRANSISTOR DTC144EUA-T106 | | |
| 1476 | | AG | TRANSISTOR | | Q7021 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 1477 | | AG | TRANSISTOR | | Q7022 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 1478 | | AG | TRANSISTOR | | Q7602 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1479 | | AG | TRANSISTOR | | Q7603 | 8-729-141-73 | TRANSISTOR 2SC3624A-T1L15L16 | | |
| 1480 | | AG | TRANSISTOR | | Q7604 | 8-729-141-73 | TRANSISTOR 2SC3624A-T1L15L16 | | |
| 1481 | | AG | TRANSISTOR | | Q7605 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1482 | | AG | TRANSISTOR | | Q7606 | 8-729-141-73 | TRANSISTOR 2SC3624A-T1L15L16 | | |
| 1483 | | AG | TRANSISTOR | | Q7607 | 8-729-141-73 | TRANSISTOR 2SC3624A-T1L15L16 | | |
| 1484 | | AG | TRANSISTOR | | Q7608 | 8-729-029-14 | TRANSISTOR DTC144EUA-T106 | | |
| 1485 | | AG | TRANSISTOR | | Q7609 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1486 | | AG | TRANSISTOR | | Q7610 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1487 | | AG | TRANSISTOR | | Q7611 | 8-729-029-14 | TRANSISTOR DTC144EUA-T106 | | |
| 1488 | | AG | TRANSISTOR | | Q9301 | 8-729-141-73 | TRANSISTOR 2SC3624A-T1L15L16 | | |
| 1489 | | AG | TRANSISTOR | | Q9302 | 8-729-141-73 | TRANSISTOR 2SC3624A-T1L15L16 | | |
| 1490 | | AG | TRANSISTOR | | Q9303 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1491 | | AG | TRANSISTOR | | Q9304 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1492 | | AG | TRANSISTOR | | Q9305 | 8-729-029-14 | TRANSISTOR DTC144EUA-T106 | | |
| 1493 | | AG | TRANSISTOR | | Q9306 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1494 | | AG | TRANSISTOR | | Q9307 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1495 | | AG | TRANSISTOR | | Q9701 | 8-729-600-22 | TRANSISTOR 2SA1235-F | | |
| 1496 | | AG | TRANSISTOR | | Q9702 | 8-729-922-10 | TRANSISTOR 2SA1577-QR | | |
| 1497 | | AG | TRANSISTOR | | Q9703 | 8-729-922-10 | TRANSISTOR 2SA1577-QR | | |
| 1498 | | AG | TRANSISTOR | | Q9704 | 8-729-922-10 | TRANSISTOR 2SA1577-QR | | |
| 1499 | | AG | RESISTOR | | R2006 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1500 | | AG | RESISTOR | | R2007 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1501 | | AG | RESISTOR | | R2019 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1502 | | AG | RESISTOR | | R2020 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1503 | | AG | RESISTOR | | R2023 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1504 | | AG | RESISTOR | | R2024 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1505 | | AG | RESISTOR | | R2030 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1506 | | AG | RESISTOR | | R2037 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1507 | | AG | RESISTOR | | R2038 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1508 | | AG | RESISTOR | | R2050 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1509 | | AG | RESISTOR | | R2051 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1510 | | AG | RESISTOR | | R2052 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1511 | | AG | RESISTOR | | R2053 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1512 | | AG | RESISTOR | | R6001 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1513 | | AG | RESISTOR | | R6002 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1514 | | AG | RESISTOR | | R6003 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1515 | | AG | RESISTOR | | R6004 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 1516 | | AG | RESISTOR | | R6007 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 1517 | | AG | RESISTOR | | R6008 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | | |
| 1518 | | AG | RESISTOR | | R6009 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1519 | | AG | RESISTOR | | R6012 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1520 | | AG | RESISTOR | | R6013 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1521 | | AG | RESISTOR | | R6014 | 1-218-889-11 | METAL CHIP 56K 0.5% 1/10W | | |
| 1522 | | AG | RESISTOR | | R6017 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1523 | | AG | RESISTOR | | R6020 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1524 | | AG | RESISTOR | | R6021 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1525 | | AG | RESISTOR | | R6023 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1526 | | AG | RESISTOR | | R6025 | 1-218-857-11 | METAL CHIP 2.7K 0.5% 1/10W | | |
| 1527 | | AG | RESISTOR | | R6026 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1528 | | AG | RESISTOR | | R6028 | 1-218-861-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 1529 | | AG | RESISTOR | | R6029 | 1-218-861-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 1530 | | AG | RESISTOR | | R6030 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1531 | | AG | RESISTOR | | R6032 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1532 | | AG | RESISTOR | | R6033 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1533 | | AG | RESISTOR | | R6034 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1534 | | AG | RESISTOR | | R6037 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1535 | | AG | RESISTOR | | R6039 | 1-216-815-11 | METAL CHIP 330 5% 1/10W | | |
| 1536 | | AG | RESISTOR | | R6040 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1537 | | AG | RESISTOR | | R6051 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1538 | | AG | RESISTOR | | R6052 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1539 | | AG | RESISTOR | | R7000 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1540 | | AG | RESISTOR | | R7001 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1541 | | AG | RESISTOR | | R7003 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1542 | | AG | RESISTOR | | R7004 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1543 | | AG | RESISTOR | | R7007 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1544 | | AG | RESISTOR | | R7010 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1545 | | AG | RESISTOR | | R7011 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1546 | | AG | RESISTOR | | R7012 | 1-216-864-11 | SHORT CHIP 0 | | |

| No. | # | Board | Type | Δ / [*] | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|-------------------------|----------|--------------|----------------------------|-----------|-----------|
| 1547 | | AG | RESISTOR | | R7014 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1548 | | AG | RESISTOR | | R7015 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1549 | | AG | RESISTOR | | R7017 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1550 | | AG | RESISTOR | | R7018 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1551 | | AG | RESISTOR | | R7019 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1552 | | AG | RESISTOR | | R7020 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1553 | | AG | RESISTOR | | R7021 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1554 | | AG | RESISTOR | | R7022 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1555 | | AG | RESISTOR | | R7025 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1556 | | AG | RESISTOR | | R7031 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 1557 | | AG | RESISTOR | | R7032 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 1558 | | AG | RESISTOR | | R7033 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 1559 | | AG | RESISTOR | | R7034 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 1560 | | AG | RESISTOR | | R7035 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1561 | | AG | RESISTOR | | R7037 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1562 | | AG | RESISTOR | | R7039 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 1563 | | AG | RESISTOR | | R7040 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 1564 | | AG | RESISTOR | | R7041 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1565 | | AG | RESISTOR | | R7045 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1566 | | AG | RESISTOR | | R7047 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1567 | | AG | RESISTOR | | R7049 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1568 | | AG | RESISTOR | | R7050 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 1569 | | AG | RESISTOR | | R7054 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1570 | | AG | RESISTOR | | R7055 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1571 | | AG | RESISTOR | | R7056 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 1572 | | AG | RESISTOR | | R7057 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 1573 | | AG | RESISTOR | | R7059 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 1574 | | AG | RESISTOR | | R7061 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1575 | | AG | RESISTOR | | R7062 | 1-218-869-11 | METAL CHIP 8.2K 0.5% 1/10W | | |
| 1576 | | AG | RESISTOR | | R7063 | 1-218-869-11 | METAL CHIP 8.2K 0.5% 1/10W | | |
| 1577 | | AG | RESISTOR | | R7064 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1578 | | AG | RESISTOR | | R7066 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 1579 | | AG | RESISTOR | | R7067 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1580 | | AG | RESISTOR | | R7087 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1581 | | AG | RESISTOR | | R7088 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1582 | | AG | RESISTOR | | R7093 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1583 | | AG | RESISTOR | | R7101 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1584 | | AG | RESISTOR | | R7102 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1585 | | AG | RESISTOR | | R7103 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | | |
| 1586 | | AG | RESISTOR | | R7111 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1587 | | AG | RESISTOR | | R7112 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1588 | | AG | RESISTOR | | R7113 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 1589 | | AG | RESISTOR | | R7114 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 1590 | | AG | RESISTOR | | R7115 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 1591 | | AG | RESISTOR | | R7116 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 1592 | | AG | RESISTOR | | R7117 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1593 | | AG | RESISTOR | | R7118 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1594 | | AG | RESISTOR | | R7119 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1595 | | AG | RESISTOR | | R7120 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1596 | | AG | RESISTOR | | R7122 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1597 | | AG | RESISTOR | | R7124 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 1598 | | AG | RESISTOR | | R7125 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 1599 | | AG | RESISTOR | | R7126 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1600 | | AG | RESISTOR | | R7127 | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W | | |
| 1601 | | AG | RESISTOR | | R7128 | 1-218-901-11 | METAL CHIP 180K 0.5% 1/10W | | |
| 1602 | | AG | RESISTOR | | R7129 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1603 | | AG | RESISTOR | | R7130 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 1604 | | AG | RESISTOR | | R7131 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 1605 | | AG | RESISTOR | | R7132 | 1-218-895-11 | METAL CHIP 100K 0.5% 1/10W | | |
| 1606 | | AG | RESISTOR | | R7133 | 1-218-895-11 | METAL CHIP 100K 0.5% 1/10W | | |
| 1607 | | AG | RESISTOR | | R7134 | 1-216-296-11 | SHORT CHIP 0 | | |
| 1608 | | AG | RESISTOR | | R7135 | 1-216-296-11 | SHORT CHIP 0 | | |
| 1609 | | AG | RESISTOR | | R7136 | 1-216-296-11 | SHORT CHIP 0 | | |
| 1610 | | AG | RESISTOR | | R7137 | 1-216-296-11 | SHORT CHIP 0 | | |
| 1611 | | AG | RESISTOR | | R7138 | 1-216-800-11 | METAL CHIP 18 5% 1/10W | | |
| 1612 | | AG | RESISTOR | | R7139 | 1-216-800-11 | METAL CHIP 18 5% 1/10W | | |
| 1613 | | AG | RESISTOR | | R7140 | 1-216-800-11 | METAL CHIP 18 5% 1/10W | | |
| 1614 | | AG | RESISTOR | | R7141 | 1-216-800-11 | METAL CHIP 18 5% 1/10W | | |
| 1615 | | AG | RESISTOR | | R7142 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1616 | | AG | RESISTOR | | R7143 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1617 | | AG | RESISTOR | | R7144 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1618 | | AG | RESISTOR | | R7145 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1619 | | AG | RESISTOR | | R7146 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1620 | | AG | RESISTOR | | R7147 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|-----|----------|--------------|----------------------------|-----------|-----------|
| 1621 | | AG | RESISTOR | | R7152 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1622 | | AG | RESISTOR | | R7153 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1623 | | AG | RESISTOR | | R7154 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1624 | | AG | RESISTOR | | R7155 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1625 | | AG | RESISTOR | | R7156 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1626 | | AG | RESISTOR | | R7158 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1627 | | AG | RESISTOR | | R7600 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1628 | | AG | RESISTOR | | R7601 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1629 | | AG | RESISTOR | | R7602 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1630 | | AG | RESISTOR | | R7603 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 1631 | | AG | RESISTOR | | R7604 | 1-218-875-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 1632 | | AG | RESISTOR | | R7605 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1633 | | AG | RESISTOR | | R7606 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1634 | | AG | RESISTOR | | R7614 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1635 | | AG | RESISTOR | | R7615 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 1636 | | AG | RESISTOR | | R7620 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1637 | | AG | RESISTOR | | R7621 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 1638 | | AG | RESISTOR | | R7622 | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 1639 | | AG | RESISTOR | | R7623 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1640 | | AG | RESISTOR | | R7626 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1641 | | AG | RESISTOR | | R7627 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1642 | | AG | RESISTOR | | R7628 | 1-218-745-11 | METAL CHIP 160K 0.5% 1/10W | | |
| 1643 | | AG | RESISTOR | | R7629 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1644 | | AG | RESISTOR | | R7630 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1645 | | AG | RESISTOR | | R7631 | 1-218-745-11 | METAL CHIP 160K 0.5% 1/10W | | |
| 1646 | | AG | RESISTOR | | R7632 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 1647 | | AG | RESISTOR | | R7633 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 1648 | | AG | RESISTOR | | R7634 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 1649 | | AG | RESISTOR | | R7635 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 1650 | | AG | RESISTOR | | R7636 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1651 | | AG | RESISTOR | | R7637 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1652 | | AG | RESISTOR | | R7639 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1653 | | AG | RESISTOR | | R7641 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1654 | | AG | RESISTOR | | R7642 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1655 | | AG | RESISTOR | | R7643 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1656 | | AG | RESISTOR | | R7644 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 1657 | | AG | RESISTOR | | R7646 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 1658 | | AG | RESISTOR | | R7650 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1659 | | AG | RESISTOR | | R7651 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1660 | | AG | RESISTOR | | R7652 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1661 | | AG | RESISTOR | | R7653 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1662 | | AG | RESISTOR | | R7654 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1663 | | AG | RESISTOR | | R7655 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1664 | | AG | RESISTOR | | R7656 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1665 | | AG | RESISTOR | | R7657 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1666 | | AG | RESISTOR | | R7658 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1667 | | AG | RESISTOR | | R7659 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1668 | | AG | RESISTOR | | R7660 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1669 | | AG | RESISTOR | | R7661 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1670 | | AG | RESISTOR | | R7662 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1671 | | AG | RESISTOR | | R7663 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1672 | | AG | RESISTOR | | R7682 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1673 | | AG | RESISTOR | | R7683 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1674 | | AG | RESISTOR | | R7684 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1675 | | AG | RESISTOR | | R9004 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 1676 | | AG | RESISTOR | | R9005 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 1677 | | AG | RESISTOR | | R9008 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1678 | | AG | RESISTOR | | R9009 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1679 | | AG | RESISTOR | | R9010 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1680 | | AG | RESISTOR | | R9011 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1681 | | AG | RESISTOR | | R9014 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1682 | | AG | RESISTOR | | R9015 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1683 | | AG | RESISTOR | | R9017 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1684 | | AG | RESISTOR | | R9019 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 1685 | | AG | RESISTOR | | R9020 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 1686 | | AG | RESISTOR | | R9021 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 1687 | | AG | RESISTOR | | R9022 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 1688 | | AG | RESISTOR | | R9023 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1689 | | AG | RESISTOR | | R9024 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1690 | | AG | RESISTOR | | R9025 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1691 | | AG | RESISTOR | | R9029 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1692 | | AG | RESISTOR | | R9030 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1693 | | AG | RESISTOR | | R9031 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1694 | | AG | RESISTOR | | R9032 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |

| No. | # | Board | Type | Δ / [*] | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|-------------------------|----------|--------------|----------------------------|-----------|-----------|
| 1695 | | AG | RESISTOR | | R9033 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1696 | | AG | RESISTOR | | R9034 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 1697 | | AG | RESISTOR | | R9036 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 1698 | | AG | RESISTOR | | R9037 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 1699 | | AG | RESISTOR | | R9039 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 1700 | | AG | RESISTOR | | R9040 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1701 | | AG | RESISTOR | | R9041 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1702 | | AG | RESISTOR | | R9042 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1703 | | AG | RESISTOR | | R9045 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1704 | | AG | RESISTOR | | R9046 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1705 | | AG | RESISTOR | | R9057 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1706 | | AG | RESISTOR | | R9058 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1707 | | AG | RESISTOR | | R9059 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1708 | | AG | RESISTOR | | R9060 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1709 | | AG | RESISTOR | | R9061 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1710 | | AG | RESISTOR | | R9062 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1711 | | AG | RESISTOR | | R9063 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1712 | | AG | RESISTOR | | R9064 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1713 | | AG | RESISTOR | | R9065 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1714 | | AG | RESISTOR | | R9066 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1715 | | AG | RESISTOR | | R9067 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1716 | | AG | RESISTOR | | R9078 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1717 | | AG | RESISTOR | | R9086 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1718 | | AG | RESISTOR | | R9087 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1719 | | AG | RESISTOR | | R9088 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 1720 | | AG | RESISTOR | | R9089 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 1721 | | AG | RESISTOR | | R9095 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1722 | | AG | RESISTOR | | R9096 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1723 | | AG | RESISTOR | | R9097 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1724 | | AG | RESISTOR | | R9098 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1725 | | AG | RESISTOR | | R9101 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1726 | | AG | RESISTOR | | R9102 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1727 | | AG | RESISTOR | | R9150 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1728 | | AG | RESISTOR | | R9151 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1729 | | AG | RESISTOR | | R9152 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1730 | | AG | RESISTOR | | R9153 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1731 | | AG | RESISTOR | | R9154 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1732 | | AG | RESISTOR | | R9155 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1733 | | AG | RESISTOR | | R9156 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1734 | | AG | RESISTOR | | R9157 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1735 | | AG | RESISTOR | | R9158 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1736 | | AG | RESISTOR | | R9304 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 1737 | | AG | RESISTOR | | R9309 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | | |
| 1738 | | AG | RESISTOR | | R9312 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1739 | | AG | RESISTOR | | R9315 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1740 | | AG | RESISTOR | | R9318 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 1741 | | AG | RESISTOR | | R9319 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 1742 | | AG | RESISTOR | | R9320 | 1-218-887-11 | METAL CHIP 47K 0.5% 1/10W | | |
| 1743 | | AG | RESISTOR | | R9321 | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W | | |
| 1744 | | AG | RESISTOR | | R9322 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1745 | | AG | RESISTOR | | R9323 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1746 | | AG | RESISTOR | | R9324 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1747 | | AG | RESISTOR | | R9325 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1748 | | AG | RESISTOR | | R9326 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1749 | | AG | RESISTOR | | R9328 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1750 | | AG | RESISTOR | | R9329 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1751 | | AG | RESISTOR | | R9330 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1752 | | AG | RESISTOR | | R9331 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1753 | | AG | RESISTOR | | R9332 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1754 | | AG | RESISTOR | | R9333 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1755 | | AG | RESISTOR | | R9334 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1756 | | AG | RESISTOR | | R9501 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1757 | | AG | RESISTOR | | R9502 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1758 | | AG | RESISTOR | | R9506 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 1759 | | AG | RESISTOR | | R9546 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1760 | | AG | RESISTOR | | R9547 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1761 | | AG | RESISTOR | | R9555 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1762 | | AG | RESISTOR | | R9700 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1763 | | AG | RESISTOR | | R9701 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1764 | | AG | RESISTOR | | R9702 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1765 | | AG | RESISTOR | | R9703 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1766 | | AG | RESISTOR | | R9704 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1767 | | AG | RESISTOR | | R9705 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1768 | | AG | RESISTOR | | R9706 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|----|-----------|----------|-----|----------|--------------|--------------------------------|------------|-----------|
| 1769 | | AG | RESISTOR | | R9707 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1770 | | AG | RESISTOR | | R9708 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1771 | | AG | RESISTOR | | R9710 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1772 | | AG | RESISTOR | | R9712 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1773 | | AG | RESISTOR | | R9714 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1774 | | AG | RESISTOR | | R9717 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 1775 | | AG | RESISTOR | | R9718 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1776 | | AG | RESISTOR | | R9719 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1777 | | AG | RESISTOR | | R9720 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1778 | | AG | RESISTOR | | R9721 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1779 | | AG | RESISTOR | | R9722 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1780 | | AG | RESISTOR | | R9723 | 1-216-811-11 | METAL CHIP 150 5% 1/10W | | |
| 1781 | | AG | RESISTOR | | R9724 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1782 | | AG | RESISTOR | | R9725 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1783 | | AG | RESISTOR | | R9726 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1784 | | AG | RESISTOR | | R9727 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1785 | | AG | RESISTOR | | R9728 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1786 | | AG | RESISTOR | | R9729 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1787 | | AG | VARISTOR | | VD9001 | 8-719-977-28 | DIODE DTZ10B | | |
| 1788 | | AG | VARISTOR | | VD9002 | 8-719-977-28 | DIODE DTZ10B | | |
| 1789 | | AG | VARISTOR | | VD9003 | 8-719-977-28 | DIODE DTZ10B | | |
| 1790 | | AG | VARISTOR | | VD9004 | 8-719-977-28 | DIODE DTZ10B | | |
| 1791 | | AG | VARISTOR | | VD9005 | 8-719-977-28 | DIODE DTZ10B | | |
| 1792 | | AG | VARISTOR | | VD9006 | 8-719-977-28 | DIODE DTZ10B | | |
| 1793 | | AG | VARISTOR | | VD9025 | 1-802-082-11 | VARISTOR (SMD) | | |
| 1794 | | AG | VARISTOR | | VD9026 | 1-802-082-11 | VARISTOR (SMD) | | |
| 1795 | | AG | VARISTOR | | VD9303 | 1-802-082-11 | VARISTOR (SMD) | | |
| 1796 | | AG | VARISTOR | | VD9304 | 1-802-082-11 | VARISTOR (SMD) | | |
| 1797 | | AG | VARISTOR | | VD9305 | 1-802-082-11 | VARISTOR (SMD) | | |
| 1798 | | AG | CRYSTAL | | X7000 | 1-795-612-11 | VIBRATOR, CRYSTAL | | |
| 1799 | J | CONNECTOR | | * | CN400 | 1-820-180-11 | HEADER ASSEMBLY (PRINT PWB) 3P | | |
| 1800 | J | CONNECTOR | | | CN401 | 1-691-550-11 | PIN, CONNECTOR (1.5MM)(SMD) 3P | | |
| 1801 | J | RESISTOR | | | R400 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1802 | J | RESISTOR | | | R401 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1803 | J | RESISTOR | | | R402 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1804 | J | RESISTOR | | | R403 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1805 | H2 | CAPACITOR | | | C203 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | 32/40V2000 | |
| 1806 | H2 | CAPACITOR | | | C204 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | 32/40V2000 | |
| 1807 | H2 | CAPACITOR | | | C205 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | 32/40V2000 | |
| 1808 | H2 | CAPACITOR | | | C206 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | 32/40V2000 | |
| 1809 | H2 | CAPACITOR | | | C207 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | 32/40V2000 | |
| 1810 | H2 | CAPACITOR | | | C208 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | 32/40V2000 | |
| 1811 | H2 | CAPACITOR | | | C215 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | 32/40V2000 | |
| 1812 | H2 | CONNECTOR | | | CN201 | 1-820-192-11 | HEADER ASSEMBLY (PRINT PWB)15P | 32/40V2000 | |
| 1813 | H2 | DIODE | | | D201 | 8-719-083-79 | DIODE MM3Z10VT1 | 32/40V2000 | |
| 1814 | H2 | DIODE | | | D202 | 8-719-083-79 | DIODE MM3Z10VT1 | 32/40V2000 | |
| 1815 | H2 | DIODE | | | D203 | 8-719-083-79 | DIODE MM3Z10VT1 | 32/40V2000 | |
| 1816 | H2 | DIODE | | | D204 | 8-719-083-79 | DIODE MM3Z10VT1 | 32/40V2000 | |
| 1817 | H2 | DIODE | | | D205 | 8-719-083-79 | DIODE MM3Z10VT1 | 32/40V2000 | |
| 1818 | H2 | DIODE | | | D206 | 8-719-083-79 | DIODE MM3Z10VT1 | 32/40V2000 | |
| 1819 | H2 | JACK | | | J201 | 1-780-368-11 | S TERMINAL BLOCK (RIGHT ANGLE) | 32/40V2000 | |
| 1820 | H2 | JACK | | | J202 | 1-568-267-11 | JACK | 32/40V2000 | |
| 1821 | H2 | RESISTOR | | | R202 | 1-216-864-11 | SHORT CHIP 0 | 32/40V2000 | |
| 1822 | H2 | RESISTOR | | | R203 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | 32/40V2000 | |
| 1823 | H2 | RESISTOR | | | R204 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | 32/40V2000 | |
| 1824 | H2 | RESISTOR | | | R205 | 1-216-864-11 | SHORT CHIP 0 | 32/40V2000 | |
| 1825 | H2 | RESISTOR | | | R206 | 1-216-864-11 | SHORT CHIP 0 | 32/40V2000 | |
| 1826 | H2 | RESISTOR | | | R207 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 32/40V2000 | |
| 1827 | H2 | RESISTOR | | | R208 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 32/40V2000 | |
| 1828 | H2 | RESISTOR | | | R209 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | 32/40V2000 | |
| 1829 | H2 | RESISTOR | | | R210 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 32/40V2000 | |
| 1830 | H2 | RESISTOR | | | R211 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 32/40V2000 | |
| 1831 | H2 | RESISTOR | | | R212 | 1-216-864-11 | SHORT CHIP 0 | 32/40V2000 | |
| 1832 | H2 | RESISTOR | | | R213 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 32/40V2000 | |
| 1833 | H2 | RESISTOR | | | R214 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 32/40V2000 | |
| 1834 | H2 | RESISTOR | | | R215 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | 32/40V2000 | |
| 1835 | H2 | RESISTOR | | | R216 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | 32/40V2000 | |
| 1836 | H2 | RESISTOR | | | R217 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 32/40V2000 | |
| 1837 | H2 | RESISTOR | | | R218 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 32/40V2000 | |
| 1838 | H2 | RESISTOR | | | R219 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | 32/40V2000 | |
| 1839 | H2 | RESISTOR | | | R220 | 1-216-864-11 | SHORT CHIP 0 | 32/40V2000 | |
| 1840 | H2 | RESISTOR | | | R224 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 32/40V2000 | |
| 1841 | H2 | RESISTOR | | | R225 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 32/40V2000 | |
| 1842 | H2 | VARISTOR | | | VD201 | 1-802-082-11 | VARISTOR (SMD) | 32/40V2000 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-----|----------|--------------|--------------------------------|------------|-----------|
| 1843 | | H2 | VARISTOR | | VD202 | 1-802-082-11 | VARISTOR (SMD) | 32/40V2000 | |
| 1844 | | H2 | VARISTOR | | VD203 | 1-802-082-11 | VARISTOR (SMD) | 32/40V2000 | |
| 1845 | | H4 | CAPACITOR | | C352 | 1-162-960-11 | CERAMIC CHIP 220PF 10.00% 50V | | |
| 1846 | | H4 | CAPACITOR | | C353 | 1-119-667-11 | CERAMIC CHIP 22UF 10V | | |
| 1847 | | H4 | CAPACITOR | | C355 | 1-165-908-11 | CERAMIC CHIP 1UF 10% 10V | | |
| 1848 | | H4 | CAPACITOR | | C357 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1849 | | H4 | CAPACITOR | | C358 | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 1850 | | H4 | CONNECTOR | | CN351 | 1-820-187-11 | HEADER ASSEMBLY (PRINT PWB)10P | | |
| 1851 | | H4 | DIODE | | D352 | 8-719-085-26 | DIODE CL-165HR/SYG-D-T | | |
| 1852 | | H4 | DIODE | | D355 | 8-719-085-26 | DIODE CL-165HR/SYG-D-T | | |
| 1853 | | H4 | DIODE | | D358 | 6-500-817-01 | DIODE (LED) SML-512UWT86 | | |
| 1854 | | H4 | IC | | IC351 | 6-600-502-01 | HIC GP1UE26RK0VF | | |
| 1855 | | H4 | IC | | IC352 | 6-600-447-01 | IC TPS853(SONY) | | |
| 1856 | | H4 | TRANSISTOR | | Q351 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 1857 | | H4 | TRANSISTOR | | Q352 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 1858 | | H4 | TRANSISTOR | | Q353 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 1859 | | H4 | TRANSISTOR | | Q354 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 1860 | | H4 | TRANSISTOR | | Q355 | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 | | |
| 1861 | | H4 | TRANSISTOR | | Q356 | 8-729-602-36 | TRANSISTOR 2SA1602-F | | |
| 1862 | | H4 | RESISTOR | | R351 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |
| 1863 | | H4 | RESISTOR | | R352 | 1-216-819-11 | METAL CHIP 680 5% 1/10W | | |
| 1864 | | H4 | RESISTOR | | R353 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |
| 1865 | | H4 | RESISTOR | | R354 | 1-216-819-11 | METAL CHIP 680 5% 1/10W | | |
| 1866 | | H4 | RESISTOR | | R355 | 1-216-826-11 | METAL CHIP 2.7K 5% 1/10W | | |
| 1867 | | H4 | RESISTOR | | R356 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1868 | | H4 | RESISTOR | | R357 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1869 | | H4 | RESISTOR | | R359 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 1870 | | H4 | RESISTOR | | R360 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1871 | | H4 | RESISTOR | | R361 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1872 | | H4 | RESISTOR | | R363 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 1873 | | H4 | RESISTOR | | R364 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 1874 | | H4 | RESISTOR | | R365 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1875 | | H4 | RESISTOR | | R366 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1876 | | H1 | CONNECTOR | | CN101 | 1-819-445-11 | HEADER ASSEMBLY FOR PWB 3P | | |
| 1877 | | H1 | RESISTOR | | R101 | 1-218-848-11 | METAL CHIP 1.1K 0.5% 1/10W | | |
| 1878 | | H1 | RESISTOR | | R102 | 1-218-841-11 | METAL CHIP 560 0.5% 1/10W | | |
| 1879 | | H1 | RESISTOR | | R103 | 1-218-835-11 | METAL CHIP 330 0.5% 1/10W | | |
| 1880 | | H1 | RESISTOR | | R104 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | | |
| 1881 | | H1 | RESISTOR | | R105 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 1882 | | H1 | SWITCH | | S101 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 1883 | | H1 | SWITCH | | S102 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 1884 | | H1 | SWITCH | | S103 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 1885 | | H1 | SWITCH | | S104 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 1886 | | H1 | SWITCH | | S105 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 1887 | | H1 | SWITCH | | S106 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 1888 | | H1 | SWITCH | | S107 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 1889 | | H46 | CAPACITOR | | C203 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | 46V2000 | |
| 1890 | | H46 | CAPACITOR | | C204 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | 46V2000 | |
| 1891 | | H46 | CAPACITOR | | C205 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | 46V2000 | |
| 1892 | | H46 | CAPACITOR | | C206 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | 46V2000 | |
| 1893 | | H46 | CAPACITOR | | C207 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | 46V2000 | |
| 1894 | | H46 | CAPACITOR | | C208 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | 46V2000 | |
| 1895 | | H46 | CAPACITOR | | C215 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | 46V2000 | |
| 1896 | | H46 | CONNECTOR | | CN201 | 1-820-192-11 | HEADER ASSEMBLY (PRINT PWB)15P | 46V2000 | |
| 1897 | | H46 | DIODE | | D201 | 8-719-977-28 | DIODE DTZ10B | 46V2000 | |
| 1898 | | H46 | DIODE | | D202 | 8-719-977-28 | DIODE DTZ10B | 46V2000 | |
| 1899 | | H46 | DIODE | | D203 | 8-719-977-28 | DIODE DTZ10B | 46V2000 | |
| 1900 | | H46 | DIODE | | D204 | 8-719-977-28 | DIODE DTZ10B | 46V2000 | |
| 1901 | | H46 | DIODE | | D205 | 8-719-977-28 | DIODE DTZ10B | 46V2000 | |
| 1902 | | H46 | DIODE | | D206 | 8-719-977-28 | DIODE DTZ10B | 46V2000 | |
| 1903 | | H46 | JACK | | J201 | 1-780-368-11 | S TERMINAL BLOCK (RIGHT ANGLE) | 46V2000 | |
| 1904 | | H46 | JACK | | J202 | 1-815-325-11 | JACK | 46V2000 | |
| 1905 | | H46 | RESISTOR | | R202 | 1-216-864-11 | SHORT CHIP 0 | 46V2000 | |
| 1906 | | H46 | RESISTOR | | R203 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | 46V2000 | |
| 1907 | | H46 | RESISTOR | | R204 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | 46V2000 | |
| 1908 | | H46 | RESISTOR | | R205 | 1-216-864-11 | SHORT CHIP 0 | 46V2000 | |
| 1909 | | H46 | RESISTOR | | R206 | 1-216-864-11 | SHORT CHIP 0 | 46V2000 | |
| 1910 | | H46 | RESISTOR | | R207 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 46V2000 | |
| 1911 | | H46 | RESISTOR | | R208 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 46V2000 | |
| 1912 | | H46 | RESISTOR | | R209 | 1-218-285-11 | METAL CHIP 75 5% 1/10W | 46V2000 | |
| 1913 | | H46 | RESISTOR | | R210 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 46V2000 | |
| 1914 | | H46 | RESISTOR | | R211 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 46V2000 | |
| 1915 | | H46 | RESISTOR | | R212 | 1-216-864-11 | SHORT CHIP 0 | 46V2000 | |
| 1916 | | H46 | RESISTOR | | R213 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 46V2000 | |

| No. | # | Board | Type | Δ/\wedge | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|-----------------|----------|--------------|-----------------------------|-----------|-----------|
| 1917 | | H46 | RESISTOR | | R214 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 46V2000 | |
| 1918 | | H46 | RESISTOR | | R215 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | 46V2000 | |
| 1919 | | H46 | RESISTOR | | R216 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | 46V2000 | |
| 1920 | | H46 | RESISTOR | | R217 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 46V2000 | |
| 1921 | | H46 | RESISTOR | | R218 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | 46V2000 | |
| 1922 | | H46 | RESISTOR | | R219 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | 46V2000 | |
| 1923 | | H46 | RESISTOR | | R220 | 1-216-864-11 | SHORT CHIP 0 | 46V2000 | |
| 1924 | | H46 | RESISTOR | | R224 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 46V2000 | |
| 1925 | | H46 | RESISTOR | | R225 | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W | 46V2000 | |
| 1926 | | H46 | VARISTOR | | VD201 | 1-802-082-11 | VARISTOR (SMD) | 46V2000 | |
| 1927 | | H46 | VARISTOR | | VD202 | 1-802-082-11 | VARISTOR (SMD) | 46V2000 | |
| 1928 | | H46 | VARISTOR | | VD203 | 1-802-082-11 | VARISTOR (SMD) | 46V2000 | |
| 1929 | | G1 | CAPACITOR | | C6101 | 1-161-964-91 | CERAMIC 4700PF F | 32V2000 | |
| 1930 | | G1 | CAPACITOR | | C6104 | 1-117-697-41 | CERAMIC 470PF B | 32V2000 | |
| 1931 | | G1 | CAPACITOR | | C6105 | 1-165-529-11 | PETP FILM 0.22MF | 32V2000 | |
| 1932 | | G1 | CAPACITOR | | C6106 | 1-165-529-11 | PETP FILM 0.22MF | 32V2000 | |
| 1933 | | G1 | CAPACITOR | | C6109 | 1-117-697-41 | CERAMIC 470PF B | 32V2000 | |
| 1934 | | G1 | CAPACITOR | | C6110 | 1-161-964-91 | CERAMIC 4700PF F | 32V2000 | |
| 1935 | | G1 | CAPACITOR | | C6111 | 1-113-915-91 | CERAMIC 1000PF E | 32V2000 | |
| 1936 | | G1 | CAPACITOR | | C6112 | 1-112-744-52 | METALIZED PET FILM 1MF | 32V2000 | |
| 1937 | | G1 | CAPACITOR | | C6115 | 1-112-744-52 | METALIZED PET FILM 1MF | 32V2000 | |
| 1938 | | G1 | CAPACITOR | | C6116 | 1-112-744-52 | METALIZED PET FILM 1MF | 32V2000 | |
| 1939 | | G1 | CAPACITOR | | C6122 | 1-165-127-91 | CERAMIC 470PF | 32V2000 | |
| 1940 | | G1 | CAPACITOR | | C6123 | 1-165-127-91 | CERAMIC 470PF | 32V2000 | |
| 1941 | | G1 | CAPACITOR | | C6125 | 1-114-134-11 | ELECT 180MF | 32V2000 | |
| 1942 | | G1 | CAPACITOR | | C6127 | 1-162-964-91 | CERAMIC CHIP 1000PF B 1608 | 32V2000 | |
| 1943 | | G1 | CAPACITOR | | C6129 | 1-115-339-91 | CERAMIC 0.1MF B (2012) | 32V2000 | |
| 1944 | | G1 | CAPACITOR | | C6131 | 1-115-339-91 | CERAMIC 0.1MF B (2012) | 32V2000 | |
| 1945 | | G1 | CAPACITOR | | C6132 | 1-115-339-91 | CERAMIC 0.1MF B (2012) | 32V2000 | |
| 1946 | | G1 | CAPACITOR | | C6133 | 1-165-127-91 | CERAMIC 470PF | 32V2000 | |
| 1947 | | G1 | CAPACITOR | | C6134 | 1-165-127-91 | CERAMIC 470PF | 32V2000 | |
| 1948 | | G1 | CAPACITOR | | C6138 | 1-107-826-91 | CERAMIC CHIP 100000PF B | 32V2000 | |
| 1949 | | G1 | CAPACITOR | | C6139 | 1-162-927-91 | CERAMIC CHIP 100PF CH 1608 | 32V2000 | |
| 1950 | | G1 | CAPACITOR | | C6141 | 1-107-905-91 | ELECT 4.7MF | 32V2000 | |
| 1951 | | G1 | CAPACITOR | | C6143 | 1-107-903-91 | ELECT 2.2MF | 32V2000 | |
| 1952 | | G1 | CAPACITOR | | C6144 | 1-165-127-91 | CERAMIC 470PF | 32V2000 | |
| 1953 | | G1 | CAPACITOR | | C6147 | 1-137-807-31 | ELECT 100MF | 32V2000 | |
| 1954 | | G1 | CAPACITOR | | C6149 | 1-162-964-91 | CERAMIC CHIP 1000PF B 1608 | 32V2000 | |
| 1955 | | G1 | CAPACITOR | | C6152 | 1-162-964-91 | CERAMIC CHIP 1000PF B 1608 | 32V2000 | |
| 1956 | | G1 | CAPACITOR | | C6201 | 1-127-715-91 | CERAMIC CHIP 0.22MF B 1608 | 32V2000 | |
| 1957 | | G1 | CAPACITOR | | C6202 | 1-112-218-21 | ELECT 680MF | 32V2000 | |
| 1958 | | G1 | CAPACITOR | | C6203 | 1-107-882-91 | ELECT 100MF | 32V2000 | |
| 1959 | | G1 | CAPACITOR | | C6210 | 1-127-573-91 | CERAMIC CHIP 1MF B (2012) | 32V2000 | |
| 1960 | | G1 | CAPACITOR | | C6212 | 1-127-573-91 | CERAMIC CHIP 1MF B (2012) | 32V2000 | |
| 1961 | | G1 | CAPACITOR | | C6214 | 1-162-970-91 | CERAMIC CHIP 10000PF B 1608 | 32V2000 | |
| 1962 | | G1 | CAPACITOR | | C6215 | 1-100-597-91 | CERAMIC CHIP 0.1MF B 1608 | 32V2000 | |
| 1963 | | G1 | CAPACITOR | | C6301 | 1-162-966-91 | CERAMIC CHIP 2200PF B 1608 | 32V2000 | |
| 1964 | | G1 | CAPACITOR | | C6302 | 1-162-964-91 | CERAMIC CHIP 1000PF B 1608 | 32V2000 | |
| 1965 | | G1 | CAPACITOR | | C6303 | 1-162-970-91 | CERAMIC CHIP 10000PF B 1608 | 32V2000 | |
| 1966 | | G1 | CAPACITOR | | C6304 | 1-107-823-91 | CERAMIC 470000PF B (2012) | 32V2000 | |
| 1967 | | G1 | CAPACITOR | | C6306 | 1-115-339-91 | CERAMIC 0.1MF B (2012) | 32V2000 | |
| 1968 | | G1 | CAPACITOR | | C6307 | 1-107-906-91 | ELECT 10MF | 32V2000 | |
| 1969 | | G1 | CAPACITOR | | C6308 | 1-104-962-91 | ELECT 47MF | 32V2000 | |
| 1970 | | G1 | CAPACITOR | | C6401 | 1-107-905-91 | ELECT 4.7MF | 32V2000 | |
| 1971 | | G1 | CAPACITOR | | C6402 | 1-112-242-21 | ELECT 1500MF | 32V2000 | |
| 1972 | | G1 | CAPACITOR | | C6403 | 1-107-907-91 | ELECT 22MF | 32V2000 | |
| 1973 | | G1 | CAPACITOR | | C6404 | 1-112-835-11 | ELECT 3300MF | 32V2000 | |
| 1974 | | G1 | CAPACITOR | | C6405 | 1-100-597-91 | CERAMIC CHIP 0.1MF B 1608 | 32V2000 | |
| 1975 | | G1 | CAPACITOR | | C6406 | 1-112-835-11 | ELECT 3300MF | 32V2000 | |
| 1976 | | G1 | CAPACITOR | | C6407 | 1-112-228-21 | ELECT 1000MF | 32V2000 | |
| 1977 | | G1 | CAPACITOR | | C6501 | 1-162-970-91 | CERAMIC CHIP 10000PF B 1608 | 32V2000 | |
| 1978 | | G1 | CAPACITOR | | C6502 | 1-115-416-91 | CERAMIC CHIP 1000PF CH 1608 | 32V2000 | |
| 1979 | | G1 | CAPACITOR | | C6503 | 1-107-906-91 | ELECT 10MF | 32V2000 | |
| 1980 | | G1 | CAPACITOR | | C6504 | 1-107-907-91 | ELECT 22MF | 32V2000 | |
| 1981 | | G1 | CAPACITOR | | C6505 | 1-100-597-91 | CERAMIC CHIP 0.1MF B 1608 | 32V2000 | |
| 1982 | | G1 | CAPACITOR | | C6506 | 1-162-970-91 | CERAMIC CHIP 10000PF B 1608 | 32V2000 | |
| 1983 | | G1 | CAPACITOR | | C6507 | 1-107-893-91 | ELECT 100MF | 32V2000 | |
| 1984 | | G1 | CAPACITOR | | C6508 | 1-100-597-91 | CERAMIC CHIP 0.1MF B 1608 | 32V2000 | |
| 1985 | | G1 | CAPACITOR | | C6509 | 1-104-962-91 | ELECT 47MF | 32V2000 | |
| 1986 | | G1 | CAPACITOR | | C6510 | 1-115-340-91 | CERAMIC 0.22MF B (2012) | 32V2000 | |
| 1987 | | G1 | CAPACITOR | | C6512 | 1-165-127-91 | CERAMIC 470PF | 32V2000 | |
| 1988 | | G1 | CAPACITOR | | C6514 | 1-128-984-11 | METALIZED FILM 0.015MF | 32V2000 | |
| 1989 | | G1 | CAPACITOR | | C6516 | 1-163-021-91 | CERAMIC 10000PF B (2012) | 32V2000 | |
| 1990 | | G1 | CONNECTOR | | CN6101 | 1-695-915-21 | TAB CONTACT | 32V2000 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|---------------|-----|----------|--------------|-------------------------------|-----------|-----------|
| 1991 | | G1 | CONNECTOR | | CN6102 | 1-691-960-11 | PIN, CONNECTOR 3P | 32V2000 | |
| 1992 | | G1 | CONNECTOR | | CN6201 | 1-695-915-21 | TAB CONTACT | 32V2000 | |
| 1993 | | G1 | CONNECTOR | | CN6202 | 1-793-236-11 | PIN, CONNECTOR 14P | 32V2000 | |
| 1994 | | G1 | CONNECTOR | | CN6203 | 1-785-708-11 | PIN, CONNECTOR 12P | 32V2000 | |
| 1995 | | G1 | DIODE | | D6101 | 8-719-510-53 | DIODE D4SB60L | 32V2000 | |
| 1996 | | G1 | DIODE | | D6102 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 1997 | | G1 | DIODE | | D6103 | 6-500-567-01 | DIODE 10ERB20-TA1B2 | 32V2000 | |
| 1998 | | G1 | DIODE | | D6104 | 6-500-567-01 | DIODE 10ERB20-TA1B2 | 32V2000 | |
| 1999 | | G1 | DIODE | | D6107 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2000 | | G1 | DIODE | | D6114 | 8-719-054-59 | DIODE FSF05A60 | 32V2000 | |
| 2001 | | G1 | DIODE | | D6128 | 8-719-055-18 | DIODE ERA22-08TP3 | 32V2000 | |
| 2002 | | G1 | DIODE | | D6129 | 6-500-567-01 | DIODE 10ERB20-TA1B2 | 32V2000 | |
| 2003 | | G1 | DIODE | | D6130 | 6-500-567-01 | DIODE 10ERB20-TA1B2 | 32V2000 | |
| 2004 | | G1 | DIODE | | D6131 | 6-501-450-01 | DIODE 11EFS4-TA1B2 | 32V2000 | |
| 2005 | | G1 | DIODE | | D6132 | 8-719-938-81 | DIODE ERA22-06TP5 | 32V2000 | |
| 2006 | | G1 | DIODE | | D6133 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2007 | | G1 | DIODE | | D6134 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2008 | | G1 | DIODE | | D6201 | 8-719-070-51 | DIODE 21DQ06-TA2B1 | 32V2000 | |
| 2009 | | G1 | DIODE | | D6202 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2010 | | G1 | DIODE | | D6301 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2011 | | G1 | DIODE | △ | D6302 | 8-719-027-76 | DIODE 1SS357-TPH3 | 32V2000 | |
| 2012 | | G1 | DIODE | | D6303 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2013 | | G1 | DIODE | | D6304 | 6-500-022-01 | DIODE MM3Z5V1ST1 | 32V2000 | |
| 2014 | | G1 | DIODE | | D6305 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2015 | | G1 | DIODE | | D6306 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2016 | | G1 | DIODE | | D6401 | 6-501-319-01 | DIODE FCQ10A06 | 32V2000 | |
| 2017 | | G1 | DIODE | | D6402 | 8-719-074-59 | DIODE FCH20A06 | 32V2000 | |
| 2018 | | G1 | DIODE | | D6403 | 8-719-074-59 | DIODE FCH20A06 | 32V2000 | |
| 2019 | | G1 | DIODE | | D6404 | 6-500-567-01 | DIODE 10ERB20-TA1B2 | 32V2000 | |
| 2020 | | G1 | DIODE | | D6405 | 6-500-567-01 | DIODE 10ERB20-TA1B2 | 32V2000 | |
| 2021 | | G1 | DIODE | | D6406 | 8-719-060-88 | DIODE D4SBS6 | 32V2000 | |
| 2022 | | G1 | DIODE | | D6407 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2023 | | G1 | DIODE | | D6408 | 8-719-082-04 | DIODE MM3Z22VT1 | 32V2000 | |
| 2024 | | G1 | DIODE | | D6501 | 8-719-027-76 | DIODE 1SS357-TPH3 | 32V2000 | |
| 2025 | | G1 | DIODE | | D6502 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2026 | | G1 | DIODE | △ | D6503 | 8-719-077-66 | DIODE 11EQS03LN-TA1B2 | 32V2000 | |
| 2027 | | G1 | DIODE | | D6504 | 8-719-027-76 | DIODE 1SS357-TPH3 | 32V2000 | |
| 2028 | | G1 | DIODE | | D6505 | 6-500-448-11 | DIODE D1NF60-TA | 32V2000 | |
| 2029 | | G1 | DIODE | | D6506 | 8-719-077-66 | DIODE 11EQS03LN-TA1B2 | 32V2000 | |
| 2030 | | G1 | DIODE | △ | D6507 | 6-501-043-01 | DIODE UMZ16NT106 | 32V2000 | |
| 2031 | | G1 | DIODE | | D6508 | 6-501-043-01 | DIODE UMZ16NT106 | 32V2000 | |
| 2032 | | G1 | DIODE | | D6514 | 8-719-081-97 | DIODE MMDL914T1 | 32V2000 | |
| 2033 | | G1 | DIODE | | D6515 | 6-500-555-01 | DIODE MM3Z27VT1 | 32V2000 | |
| 2034 | | G1 | DIODE | | D6516 | 8-719-082-03 | DIODE MM3Z15VT1 | 32V2000 | |
| 2035 | | G1 | FUSE | △ | F6101 | 1-576-231-51 | FUSE, H.B.C. | 32V2000 | |
| 2036 | | G1 | FUSE HOLDER | | FH6101 | 1-533-217-41 | FUSE HOLDER | 32V2000 | |
| 2037 | | G1 | IC | | IC6102 | 6-709-368-01 | IC MM1431ATT (CN) | 32V2000 | |
| 2038 | | G1 | IC | | IC6103 | 6-709-368-01 | IC MM1431ATT (CN) | 32V2000 | |
| 2039 | | G1 | IC | | IC6104 | 6-708-801-01 | IC MIP2H2 | 32V2000 | |
| 2040 | | G1 | IC | | IC6201 | 6-709-155-01 | IC TS3431BILT | 32V2000 | |
| 2041 | | G1 | IC | △ | IC6301 | 6-709-192-01 | IC FA5501AN-D1-TE1 | 32V2000 | |
| 2042 | | G1 | IC | | IC6401 | 6-709-368-01 | IC MM1431ATT (CN) | 32V2000 | |
| 2043 | | G1 | IC | △ | IC6501 | 6-706-852-01 | IC CXD9841M | 32V2000 | |
| 2044 | | G1 | INDUCTOR | | L6102 | 1-481-065-11 | INDUCTOR (CH CHP32A012) 330UH | 32V2000 | |
| 2045 | | G1 | INDUCTOR | | L6103 | 1-400-876-21 | INDUCTOR (CH ALS050100) 100UH | 32V2000 | |
| 2046 | | G1 | INDUCTOR | | L6204 | 1-412-521-41 | INDUCTOR 4.7UH | 32V2000 | |
| 2047 | | G1 | INDUCTOR | | L6401 | 1-400-596-21 | INDUCTOR (SL810C1R0) 1.0UH | 32V2000 | |
| 2048 | | G1 | INDUCTOR | | L6402 | 1-400-596-21 | INDUCTOR (SL810C1R0) 1.0UH | 32V2000 | |
| 2049 | | G1 | INDUCTOR | | L6403 | 1-400-597-11 | INDUCTOR (CH STP-01090) 2.2UH | 32V2000 | |
| 2050 | | G1 | TRANSFORMER | | LF6101 | 1-443-947-31 | LINE FILTER (RBIA-883225NP) | 32V2000 | |
| 2051 | | G1 | TRANSFORMER | | LF6102 | 1-443-947-31 | LINE FILTER (RBIA-883225NP) | 32V2000 | |
| 2052 | | G1 | PHOTO COUPLER | | PH6101 | 6-600-276-01 | PHOTO COUPLER PS2561AL1-1-V-W | 32V2000 | |
| 2053 | | G1 | PHOTO COUPLER | | PH6102 | 6-600-276-01 | PHOTO COUPLER PS2561AL1-1-V-W | 32V2000 | |
| 2054 | | G1 | PHOTO COUPLER | | PH6103 | 6-600-276-01 | PHOTO COUPLER PS2561AL1-1-V-W | 32V2000 | |
| 2055 | | G1 | PHOTO COUPLER | | PH6104 | 6-600-276-01 | PHOTO COUPLER PS2561AL1-1-V-W | 32V2000 | |
| 2056 | | G1 | PHOTO COUPLER | | PH6501 | 6-600-276-01 | PHOTO COUPLER PS2561AL1-1-V-W | 32V2000 | |
| 2057 | | G1 | IC LINK | △ | PS6201 | 1-533-597-32 | IC LINK | 32V2000 | |
| 2058 | | G1 | IC LINK | △ | PS6202 | 1-533-597-32 | IC LINK | 32V2000 | |
| 2059 | | G1 | TRANSISTOR | △ | Q6101 | 8-729-141-50 | TRANSISTOR 2SB624T1-BV345 | 32V2000 | |
| 2060 | | G1 | TRANSISTOR | △ | Q6102 | 6-551-303-01 | TRANSISTOR 2SK3683-01MR-F111 | 32V2000 | |
| 2061 | | G1 | TRANSISTOR | | Q6106 | 8-729-620-33 | TRANSISTOR 2SA1235TP-1EF | 32V2000 | |
| 2062 | | G1 | TRANSISTOR | | Q6107 | 8-729-010-25 | TRANSISTOR MSD601-RT1 | 32V2000 | |
| 2063 | | G1 | TRANSISTOR | | Q6108 | 8-729-920-79 | TRANSISTOR 2SB1132-T100-QR | 32V2000 | |
| 2064 | | G1 | TRANSISTOR | | Q6109 | 8-729-038-23 | TRANSISTOR RT1N141C-TP-1 | 32V2000 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-----|----------|--------------|---------------------------|-----------|-----------|
| 2065 | | G1 | TRANSISTOR | | Q6201 | 8-729-045-62 | TRANSISTOR 2SK2158-T2B | 32V2000 | |
| 2066 | | G1 | TRANSISTOR | | Q6202 | 8-729-620-33 | TRANSISTOR 2SA1235TP-1EF | 32V2000 | |
| 2067 | | G1 | TRANSISTOR | | Q6203 | 8-729-045-62 | TRANSISTOR 2SK2158-T2B | 32V2000 | |
| 2068 | | G1 | TRANSISTOR | | Q6204 | 8-729-010-25 | TRANSISTOR MSD601-RT1 | 32V2000 | |
| 2069 | | G1 | TRANSISTOR | | Q6205 | 8-729-010-25 | TRANSISTOR MSD601-RT1 | 32V2000 | |
| 2070 | | G1 | TRANSISTOR | | Q6501 | 8-729-038-23 | TRANSISTOR RT1N141C-TP-1 | 32V2000 | |
| 2071 | | G1 | TRANSISTOR | △ | Q6502 | 6-551-465-01 | TRANSISTOR 2SK3561(SONY,Q | 32V2000 | |
| 2072 | | G1 | TRANSISTOR | △ | Q6503 | 6-551-465-01 | TRANSISTOR 2SK3561(SONY,Q | 32V2000 | |
| 2073 | | G1 | RESISTOR | △ | R6102 | 1-240-251-91 | METAL CEMENT 6.8 | 32V2000 | |
| 2074 | | G1 | RESISTOR | | R6103 | 1-240-576-21 | RES-CHIP 470K (2012) | 32V2000 | |
| 2075 | | G1 | RESISTOR | | R6104 | 1-240-576-21 | RES-CHIP 470K (2012) | 32V2000 | |
| 2076 | | G1 | RESISTOR | | R6108 | 1-240-576-21 | RES-CHIP 470K (2012) | 32V2000 | |
| 2077 | | G1 | RESISTOR | | R6109 | 1-240-576-21 | RES-CHIP 470K (2012) | 32V2000 | |
| 2078 | | G1 | RESISTOR | | R6110 | 1-240-572-21 | RES-CHIP 220K (2012) | 32V2000 | |
| 2079 | | G1 | RESISTOR | | R6111 | 1-216-109-91 | CHIP 330K (2012) | 32V2000 | |
| 2080 | | G1 | RESISTOR | | R6113 | 1-216-077-91 | CHIP 15K (2012) | 32V2000 | |
| 2081 | | G1 | RESISTOR | | R6114 | 1-249-397-61 | CARBON 22 | 32V2000 | |
| 2082 | | G1 | RESISTOR | | R6115 | 1-216-817-91 | CHIP 470 (1608) | 32V2000 | |
| 2083 | | G1 | RESISTOR | △ | R6118 | 1-249-389-61 | CARBON 4.7 | 32V2000 | |
| 2084 | | G1 | RESISTOR | | R6122 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2085 | | G1 | RESISTOR | △ | R6123 | 1-246-028-31 | METAL 0.15 | 32V2000 | |
| 2086 | | G1 | RESISTOR | | R6131 | 1-215-882-51 | METALIZED FILM 22 | 32V2000 | |
| 2087 | | G1 | RESISTOR | | R6132 | 1-208-840-91 | CHIP 270K (2012) | 32V2000 | |
| 2088 | | G1 | RESISTOR | | R6133 | 1-208-840-91 | CHIP 270K (2012) | 32V2000 | |
| 2089 | | G1 | RESISTOR | | R6134 | 1-208-840-91 | CHIP 270K (2012) | 32V2000 | |
| 2090 | | G1 | RESISTOR | | R6135 | 1-208-840-91 | CHIP 270K (2012) | 32V2000 | |
| 2091 | | G1 | RESISTOR | | R6136 | 1-208-838-91 | CHIP 220K (2012) | 32V2000 | |
| 2092 | | G1 | RESISTOR | | R6137 | 1-215-882-51 | METALIZED FILM 22 | 32V2000 | |
| 2093 | | G1 | RESISTOR | | R6152 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2094 | | G1 | RESISTOR | | R6154 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2095 | | G1 | RESISTOR | | R6155 | 1-216-073-91 | CHIP 10K (2012) | 32V2000 | |
| 2096 | | G1 | RESISTOR | | R6157 | 1-216-825-91 | CHIP 2.2K (1608) | 32V2000 | |
| 2097 | | G1 | RESISTOR | | R6158 | 1-247-871-91 | CARBON 47K | 32V2000 | |
| 2098 | | G1 | RESISTOR | | R6162 | 1-216-065-91 | CHIP 4.7K (2012) | 32V2000 | |
| 2099 | | G1 | RESISTOR | | R6166 | 1-245-185-21 | CHIP 5.6K (1608) | 32V2000 | |
| 2100 | | G1 | RESISTOR | | R6169 | 1-220-926-21 | FUSIBLE RESISTOR 0.47 | 32V2000 | |
| 2101 | | G1 | RESISTOR | | R6170 | 1-218-642-51 | METALIZED FILM 100K | 32V2000 | |
| 2102 | | G1 | RESISTOR | | R6172 | 1-249-385-61 | CARBON 2.2 | 32V2000 | |
| 2103 | | G1 | RESISTOR | | R6173 | 1-216-821-91 | CHIP 1.0K (1608) | 32V2000 | |
| 2104 | | G1 | RESISTOR | | R6176 | 1-208-854-91 | CHIP 1M (2012) | 32V2000 | |
| 2105 | | G1 | RESISTOR | | R6177 | 1-208-854-91 | CHIP 1M (2012) | 32V2000 | |
| 2106 | | G1 | RESISTOR | | R6178 | 1-208-854-91 | CHIP 1M (2012) | 32V2000 | |
| 2107 | | G1 | RESISTOR | | R6179 | 1-208-854-91 | CHIP 1M (2012) | 32V2000 | |
| 2108 | | G1 | RESISTOR | | R6180 | 1-208-838-91 | CHIP 220K (2012) | 32V2000 | |
| 2109 | | G1 | RESISTOR | | R6181 | 1-208-838-91 | CHIP 220K (2012) | 32V2000 | |
| 2110 | | G1 | RESISTOR | | R6184 | 1-215-869-81 | METALIZED FILM 1K | 32V2000 | |
| 2111 | | G1 | RESISTOR | | R6185 | 1-216-073-91 | CHIP 10K (2012) | 32V2000 | |
| 2112 | | G1 | RESISTOR | | R6186 | 1-216-065-91 | CHIP 4.7K (2012) | 32V2000 | |
| 2113 | | G1 | RESISTOR | | R6187 | 1-216-829-91 | CHIP 4.7K (1608) | 32V2000 | |
| 2114 | | G1 | RESISTOR | | R6188 | 1-218-879-91 | CHIP 22K (1608) | 32V2000 | |
| 2115 | | G1 | RESISTOR | | R6189 | 1-218-879-91 | CHIP 22K (1608) | 32V2000 | |
| 2116 | | G1 | RESISTOR | | R6190 | 1-216-073-91 | CHIP 10K (2012) | 32V2000 | |
| 2117 | | G1 | RESISTOR | | R6191 | 1-216-065-91 | CHIP 4.7K (2012) | 32V2000 | |
| 2118 | | G1 | RESISTOR | | R6201 | 1-216-821-91 | CHIP 1.0K (1608) | 32V2000 | |
| 2119 | | G1 | RESISTOR | | R6202 | 1-216-825-91 | CHIP 2.2K (1608) | 32V2000 | |
| 2120 | | G1 | RESISTOR | | R6203 | 1-216-827-91 | CHIP 3.3K (1608) | 32V2000 | |
| 2121 | | G1 | RESISTOR | | R6207 | 1-216-821-91 | CHIP 1.0K (1608) | 32V2000 | |
| 2122 | | G1 | RESISTOR | | R6208 | 1-216-829-91 | CHIP 4.7K (1608) | 32V2000 | |
| 2123 | | G1 | RESISTOR | | R6209 | 1-218-885-91 | CHIP 39K (1608) | 32V2000 | |
| 2124 | | G1 | RESISTOR | | R6210 | 1-218-871-91 | CHIP 10K (1608) | 32V2000 | |
| 2125 | | G1 | RESISTOR | | R6211 | 1-218-867-91 | CHIP 6.8K (1608) | 32V2000 | |
| 2126 | | G1 | RESISTOR | | R6214 | 1-216-821-91 | CHIP 1.0K (1608) | 32V2000 | |
| 2127 | | G1 | RESISTOR | | R6215 | 1-216-837-91 | CHIP 22K (1608) | 32V2000 | |
| 2128 | | G1 | RESISTOR | | R6216 | 1-216-837-91 | CHIP 22K (1608) | 32V2000 | |
| 2129 | | G1 | RESISTOR | | R6218 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2130 | | G1 | RESISTOR | | R6219 | 1-216-073-91 | CHIP 10K (2012) | 32V2000 | |
| 2131 | | G1 | RESISTOR | △ | R6220 | 1-216-793-91 | CHIP 4.7 (1608) | 32V2000 | |
| 2132 | | G1 | RESISTOR | | R6226 | 1-216-837-91 | CHIP 22K (1608) | 32V2000 | |
| 2133 | | G1 | RESISTOR | | R6227 | 1-216-049-91 | CHIP 1.0K (2012) | 32V2000 | |
| 2134 | | G1 | RESISTOR | | R6228 | 1-216-837-91 | CHIP 22K (1608) | 32V2000 | |
| 2135 | | G1 | RESISTOR | | R6229 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2136 | | G1 | RESISTOR | | R6230 | 1-247-831-91 | CARBON 1.0K | 32V2000 | |
| 2137 | | G1 | RESISTOR | | R6232 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2138 | | G1 | RESISTOR | | R6233 | 1-216-837-91 | CHIP 22K (1608) | 32V2000 | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-------------|-----|----------|--------------|---------------------------------------|-----------|-----------|
| 2139 | | G1 | RESISTOR | | R6301 | 1-245-227-21 | CHIP 330K (1608) | 32V2000 | |
| 2140 | | G1 | RESISTOR | | R6302 | 1-218-877-91 | CHIP 18K (1608) | 32V2000 | |
| 2141 | | G1 | RESISTOR | | R6303 | 1-216-097-91 | CHIP 100K (2012) | 32V2000 | |
| 2142 | | G1 | RESISTOR | | R6305 | 1-216-851-91 | CHIP 330K (1608) | 32V2000 | |
| 2143 | | G1 | RESISTOR | | R6306 | 1-216-837-91 | CHIP 22K (1608) | 32V2000 | |
| 2144 | | G1 | RESISTOR | | R6307 | 1-216-845-91 | CHIP 100K (1608) | 32V2000 | |
| 2145 | | G1 | RESISTOR | | R6308 | 1-216-864-91 | SHORT CHIP (1608) | 32V2000 | |
| 2146 | | G1 | RESISTOR | | R6309 | 1-216-809-91 | CHIP 100 (1608) | 32V2000 | |
| 2147 | | G1 | RESISTOR | | R6310 | 1-249-389-61 | CARBON 4.7 | 32V2000 | |
| 2148 | | G1 | RESISTOR | △ | R6311 | 1-216-001-91 | CHIP 10 (2012) | 32V2000 | |
| 2149 | | G1 | RESISTOR | | R6312 | 1-216-801-91 | CHIP 22 (1608) | 32V2000 | |
| 2150 | | G1 | RESISTOR | | R6313 | 1-208-804-91 | CHIP 8.2K (2012) | 32V2000 | |
| 2151 | | G1 | RESISTOR | | R6314 | 1-208-766-91 | CHIP 220 (2012) | 32V2000 | |
| 2152 | | G1 | RESISTOR | | R6315 | 1-216-295-91 | SHORT CHIP (2012) | 32V2000 | |
| 2153 | | G1 | RESISTOR | | R6318 | 1-208-816-91 | CHIP 27K (2012) | 32V2000 | |
| 2154 | | G1 | RESISTOR | | R6319 | 1-208-822-91 | CHIP 47K (2012) | 32V2000 | |
| 2155 | | G1 | RESISTOR | | R6401 | 1-216-829-91 | CHIP 4.7K (1608) | 32V2000 | |
| 2156 | | G1 | RESISTOR | | R6403 | 1-249-377-61 | CARBON 0.47 | 32V2000 | |
| 2157 | | G1 | RESISTOR | | R6404 | 1-216-073-91 | CHIP 10K (2012) | 32V2000 | |
| 2158 | | G1 | RESISTOR | | R6405 | 1-216-841-91 | CHIP 47K (1608) | 32V2000 | |
| 2159 | | G1 | RESISTOR | | R6406 | 1-218-845-91 | CHIP 820 (1608) | 32V2000 | |
| 2160 | | G1 | RESISTOR | | R6407 | 1-218-865-91 | CHIP 5.6K (1608) | 32V2000 | |
| 2161 | | G1 | RESISTOR | | R6408 | 1-216-073-91 | CHIP 10K (2012) | 32V2000 | |
| 2162 | | G1 | RESISTOR | | R6409 | 1-247-847-91 | CARBON 4.7K | 32V2000 | |
| 2163 | | G1 | RESISTOR | | R6411 | 1-218-847-91 | CHIP 1.0K (1608) | 32V2000 | |
| 2164 | | G1 | RESISTOR | | R6412 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2165 | | G1 | RESISTOR | | R6413 | 1-249-389-61 | CARBON 4.7 | 32V2000 | |
| 2166 | | G1 | RESISTOR | | R6502 | 1-216-845-91 | CHIP 100K (1608) | 32V2000 | |
| 2167 | | G1 | RESISTOR | | R6503 | 1-216-073-91 | CHIP 10K (2012) | 32V2000 | |
| 2168 | | G1 | RESISTOR | | R6504 | 1-249-385-61 | CARBON 2.2 | 32V2000 | |
| 2169 | | G1 | RESISTOR | △ | R6505 | 1-220-926-21 | FUSIBLE RESISTOR 0.47 | 32V2000 | |
| 2170 | | G1 | RESISTOR | | R6506 | 1-218-871-91 | CHIP 10K (1608) | 32V2000 | |
| 2171 | | G1 | RESISTOR | | R6509 | 1-245-135-21 | CHIP 47 (1608) | 32V2000 | |
| 2172 | | G1 | RESISTOR | | R6511 | 1-216-793-91 | CHIP 4.7 (1608) | 32V2000 | |
| 2173 | | G1 | RESISTOR | | R6512 | 1-216-009-91 | CHIP 22 (2012) | 32V2000 | |
| 2174 | | G1 | RESISTOR | | R6513 | 1-216-009-91 | CHIP 22 (2012) | 32V2000 | |
| 2175 | | G1 | RESISTOR | | R6514 | 1-245-167-21 | CHIP 1.0K (1608) | 32V2000 | |
| 2176 | | G1 | RESISTOR | | R6515 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2177 | | G1 | RESISTOR | | R6516 | 1-216-833-91 | CHIP 10K (1608) | 32V2000 | |
| 2178 | | G1 | RESISTOR | | R6517 | 1-246-028-31 | METAL 0.15 | 32V2000 | |
| 2179 | | G1 | RESISTOR | | R6529 | 1-216-121-91 | CHIP 1.0M (2012) | 32V2000 | |
| 2180 | | G1 | RELAY | | RY6101 | 1-755-488-11 | RELAY (LKP1AF-18V) | 32V2000 | |
| 2181 | | G1 | TRANSFORMER | △ | T6102 | 1-443-896-11 | CONVERTER TRANSFORMER (CVT TSE25A046) | 32V2000 | |
| 2182 | | G1 | TRANSFORMER | △ | T6501 | 1-443-897-11 | CONVERTER TRANSFORMER (CVT TSE35A045) | 32V2000 | |
| 2183 | | G1 | VARISTOR | | VDR6101 | 1-804-996-21 | VARISTOR | 32V2000 | |
| 2184 | | G1 | VARISTOR | | VDR6102 | 1-804-996-21 | VARISTOR | 32V2000 | |

If you need more information on Computer and Electronic Repair, please visit these websites to improve yourself.

<http://www.fastrepairguide.com>


<http://www.protech2u.com>

<http://www.plasma-television-repair.com>

<http://www.lcd-television-repair.com>

Happy Repairing!!

Highly Recommended Repair Ebook:




If you're a LCD Monitor repairer, then this is the best guide for you. Why? Because, the author revealed all his LCD Monitor Repairing secrets for you. I think, with just few Repair tips you learned from this guide you will get back your investment!

[Click Here to read](#) more.



This eBook will show you how to test the electronic component correctly and accurately. Some of you may say that I don't need this eBook because it is too simple! Do you know that, in fact there is lots of testing electronic components secrets I have learned from this guide? Do you know how to test a 'TRIAC' correctly and accurately? If you answer no then I guess you have to get this eBook. [Click Here to read more.](#)



Are you tired of searching the service manuals to look for the value of a burnt resistor? If the answer is YES, then this eBook is a 'must have' guide for you. You can save a lot of time and be able to repair customer's Electronic equipment with burnt resistors in it.

[Click here to read more.](#)