

# HISTORY

Model Name: KDS-50A2020/55A2020/60A2020

SERVICE MANUAL


Part No. : 9-883-624-02

When clicking an item, it's detail is displayed.

<b>Date</b>	<b>SUPP./CORR.</b>	<b>Description of SUP/COR</b>	<b>Change of main text</b>
<a href="#">2007.1</a>	-	NEW	
<a href="#">2007.5</a>	SUPP.-1	Addition of CONNECTOR ASSY 2P for EXPLODED VIEWS and ELECTRICAL PARTS LIST.	Yes

# SERVICE MANUAL SP-3 CHASSIS

<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>	<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>
KDS-50A2020	RM-YD010	USA					
KDS-50A2020	RM-YD010	CANADA					
KDS-55A2020	RM-YD010	USA					
KDS-55A2020	RM-YD010	CANADA					
KDS-60A2020	RM-YD010	USA					
KDS-60A2020	RM-YD010	CANADA					

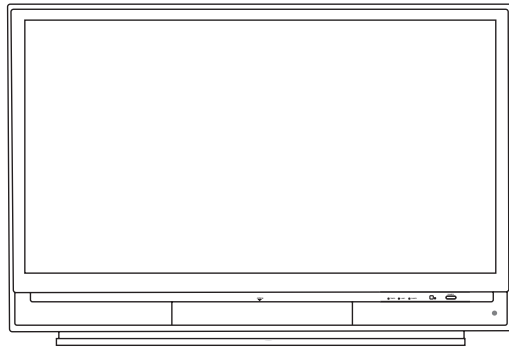

KDS-50A2020/55A2020/60A2020



RM-YD010

**SXRD PROJECTION TV**

**SONY®**

## Specifications

### Television system:

NTSC	American TV Standard
ATSC (8VSB terrestrial)	ATSC compliant 8VSB
QAM on cable	ANSI/SCTE 07 2000 (Does not include CableCARD functionality)

### Channel coverage:

Terrestrial (analog)	2-69
Cable TV (analog)	1-125
Terrestrial (digital)	2-69
Cable TV (digital)	1-135

### Antenna:

75-ohm external terminal for VHF/UHF

### Screen size (measured diagonally):

KDS-50A2020:	50 inches
KDS-55A2020:	55 inches
KDS-60A2020:	60 inches

### Projection system

3 SXRD panel, 1 lens projection system

### SXRD panel

0.61 inch SXRD panel 6,220,800 pixels (2,073,600 × 3)

### Projection lens

High performance, large diameter hybrid lens F2.5

### Lamp

Ultra High Pressure Lamp, 120W, XL-5200

### VIDEO IN 1/2/3:

YPbPr (Component Video) (VIDEO 2 only):

Y: 1.0 Vp-p, 75 ohms unbalanced,  
sync negative  
Pb: 0.7 Vp-p, 75 ohms  
Pr: 0.7 Vp-p, 75 ohms  
Signal format: 480i, 480p, 720p, 1080i

S VIDEO (4-pin mini DIN) (VIDEO 1 only):

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative  
C: 0.286 Vp-p (Burst signal), 75 ohms

VIDEO: 1 Vp-p, 75 ohms unbalanced, sync negative

AUDIO: 500 mVrms (100% modulation)  
Impedance: 47 kilohms

### HD/DVD IN 4/5:

YPbPr (Component Video) :

Y: 1.0 Vp-p, 75 ohms unbalanced,  
sync negative  
Pb: 0.7 Vp-p, 75 ohms  
Pr: 0.7 Vp-p, 75 ohms  
Signal format: 480i, 480p, 720p, 1080i

AUDIO: 500 mVrms (100% modulation)  
Impedance: 47 kilohms

### HDMI IN 6/7:

HDMI: Video: 480i, 480p, 720p, 1080i, 1080p  
Audio: Two channel linear PCM 32, 44.1 and  
48 kHz, 16, 20 and 24 bits

AUDIO (for HDMI IN 7):

500 mVrms (100% modulation)  
Impedance: 47 kilohms

### AUDIO OUT:

500 mVrms (100% modulation)  
More than 1 Vrms at the maximum volume setting (Variable)  
500 mVrms (Fixed)

### DIGITAL OUT(OPTICAL):

Optical Digital Audio Output (PCM/Dolby digital)

### PC IN 8:

D-sub 15-pin, analog RGB, 0.7 Vp-p, 75 ohms, positive  
See the PC Input Signal Reference Chart on page 60

### PC AUDIO INPUT:

Stereo mini jack, 0.5 Vrms, 47 kilohm

### Speaker:

Full range: 70 × 130 mm (2<sup>7</sup>/<sub>8</sub> × 5<sup>1</sup>/<sub>8</sub> inches) (2)

### Speaker output:

12 W + 12 W

### Power requirement:

120 V AC, 60 Hz

### Power consumption:

In use: 210W

In standby: Less than 0.5W

### Dimensions (W/H/D):

KDS-50A2020:	1180 × 839 × 447 mm (46 <sup>1</sup> / <sub>2</sub> × 33 <sup>1</sup> / <sub>8</sub> × 17 <sup>5</sup> / <sub>8</sub> inches)
KDS-55A2020:	1292 × 913 × 480 mm (50 <sup>7</sup> / <sub>8</sub> × 36 × 19 inches)
KDS-60A2020:	1413 × 988 × 514 mm (55 <sup>3</sup> / <sub>4</sub> × 39 × 20 <sup>1</sup> / <sub>4</sub> inches)

### Mass:

KDS-50A2020:	34 kg (75 lb.)
KDS-55A2020:	38 kg (83 lb. 13 oz.)
KDS-60A2020:	43 kg (94 lb. 13 oz.)

### Supplied accessories:

Remote control RM-YD010 (1)  
Size AA batteries (2)  
Operating Instructions (1)  
Quick Setup Guide (1)  
Warranty Card (1)  
Product Registration Card (1)

### Optional accessories:

TV Stand: SU-RS11M(KDS-50A2020)  
SU-RS11X  
(KDS-55A2020/KDS-60A2020)  
Lamp: XL-5200

Design and specifications are subject to change without notice.

## Replacing the Lamp

The projection lamp, like all lamps, will eventually lose brightness and functionality, which affects the overall performance of your TV. How long the lamp maintains its brightness will vary depending upon your usage and environmental conditions. To maintain the quality of your viewing experience, Sony recommends that you replace the lamp (1) after approximately 8,000 hours of use; (2) when the screen becomes dark or the color looks unusual; (3) when the LAMP LED on the front of the TV blinks; or (4) when the lamp replacement message appears on the TV screen.



### WARNING

**Electric appliances can cause fire or high temperature, resulting in injury or death. Be sure to follow the instructions below.**

- Use a Sony XL-5200 replacement lamp (not supplied) for replacement. Use of any other lamp may damage the TV.
- Do not remove the lamp for any purpose other than replacement. Doing so may cause injury or fire.
- Do not put flammable materials and metal objects inside the lamp receptacle of the TV after removing the lamp. Doing so may cause fire or electrical shock. Do not touch the lamp receptacle once the lamp has been removed.
- When the lamp eventually burns out, you may hear a noticeable pop sound. This is normal and it is inherent to this type of lamp.
- In rare instances, the bulb may pop inside the lamp unit, but the lamp unit is designed to contain all of the broken glass pieces inside the lamp unit.
- This TV's lamp contains mercury and should be disposed of properly. Consult your local authorities regarding safe disposal. The material contained in this lamp are similar to those of a fluorescent lamp, so you should dispose of it in the same way.

---

### **How to Replace the Lamp**


- 1** Turn off the power on the main unit. Wait several minutes, then unplug the power cord.  
(The cooling fan will continue to operate for about two minutes after turning the power off.)
- 2** Wait at least 30 minutes after unplugging the power cord to allow the lamp to cool down before replacing it. To avoid being burned, do not touch the lamp receptacle once the lamp has been removed.

*(Continued)*


- 3** Take the new lamp out of the box.  
Do not touch the glass portion of the new lamp.

- Do not shake the lamp. Vibration can damage the lamp or shorten its life.
- Avoid touching the front glass of a new lamp or the glass of the lamp receptacle. This may reduce picture quality or lamp life.


- 4** Remove the outside lamp cover.  
Release the two clamps as shown in the illustration below.

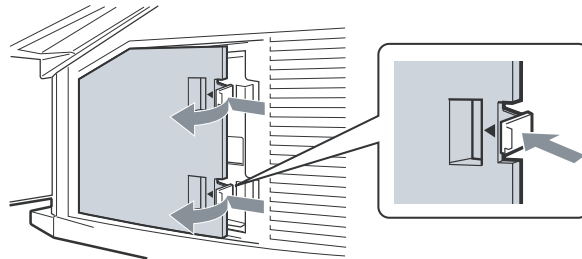

- 5** Remove the lamp door.  
Turn the screw counterclockwise and slide the lever to the left. Remove the door.

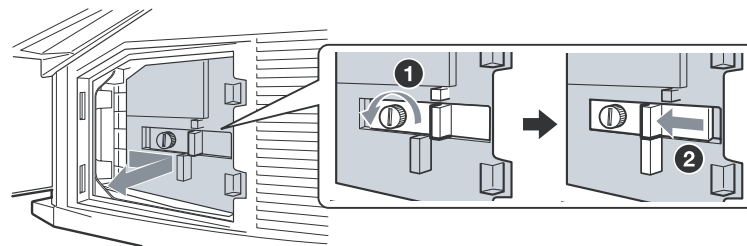


- 6** Pull out the lamp.  
Hold the indented grooves on the top corners of the lamp, as shown in the illustration, and pull the lamp straight out. If the lamp is hard to remove, pull the right side of the lamp for additional traction.

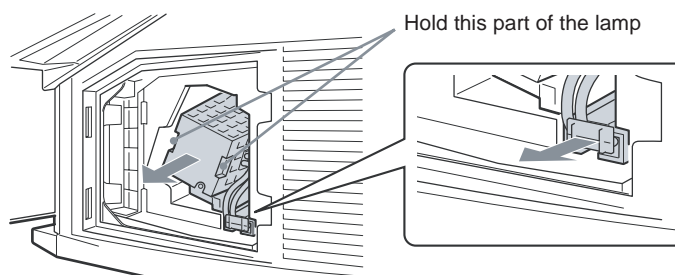


- Do not touch the inside of the lamp compartment.
- The lamp is very hot immediately after use. Never touch the glass portion of the lamp or the surrounding parts.
- After the used lamp has cooled, place it into the empty box of the replacement lamp. Never put the used lamp into a plastic bag.

## 7 Put the new lamp into its place.

Insert the new lamp by pressing the two parts firmly into place as shown in the illustration. Make sure the lamp is securely mounted into the compartment. Failure to do so may cause a fire or the screen to go dark.

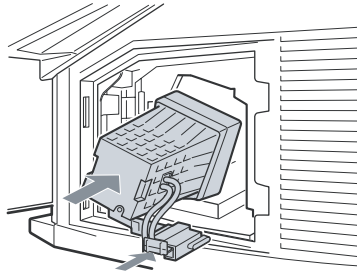


- The lamp compartment is tilted, as shown in the following illustration.



- If the lamp is not securely reattached, the self-diagnostic function may be triggered and the POWER LED blinks three times.


## 8 Reattach the lamp door.

Replace the door by inserting the two tabs in the slot from the left side. Slide the lever to the right and then turn the screw clockwise to secure the door.

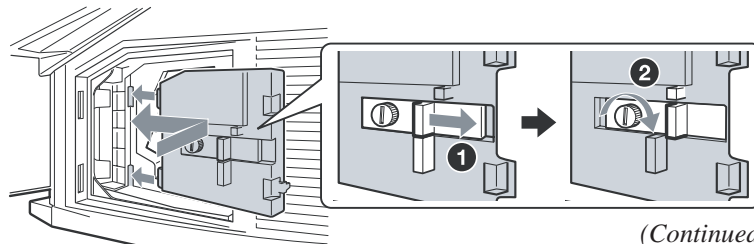

(Continued)

- 9** Put the outside lamp cover back in its place.  
Replace the cover, inserting it from the left side. Press the two tabs on the right side to secure the cover.

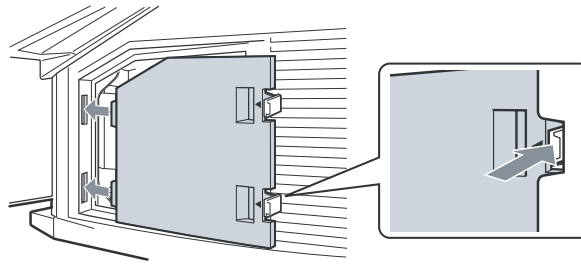

- 10** Turn on the TV and set the Lamp Replacement option in the Setup settings. This setting is necessary to inform you when the next lamp replacement is needed.

- Until you set the Lamp Replacement option, a message announcing that the lamp is at the end of its life will appear every time you turn on the TV.
- Consult your Sony dealer for a Sony XL-5200 replacement lamp.
- Take great care when replacing the lamp or plugging in/unplugging the connecting cords. Rough handling may cause the TV to fall, damaging the TV, the TV stand and the floor.

#### The used lamp

##### For customers in the United States:

This product contains mercury. Disposal of this product may be regulated if sold in the United States. For disposal or recycling information, please contact your local authorities or the Electronics Industries Alliance (<http://www.eiae.org>).

- Do not leave the used lamp near flammable materials or within the reach of children.
- Do not pour water onto the used lamp or put any object inside the lamp. Doing so may cause the lamp to burst.

**For replacement lamp information visit:**

**U. S. residents:** <http://www.sonystyle.com/tv/>

**Canadian residents:** <http://www.sonystyle.ca/tv/>

## SAFETY CHECK-OUT

( US model only )

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are "pinched" or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, through functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the condition of the monopole antenna (if any). Make sure the end is not broken off, and has the plastic cap on it. Point out the danger of impalement on a broken antenna to the customer, and recommend the antenna's replacement.
8. Check the B+ and HV to see they are at the values specified. Make sure your instruments are accurate; be suspicious of your HV meter if sets always have low HV.
9. Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.



### LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5mA (500 microampers). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery-operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)

### HOW TO FIND A GOOD EARTH GROUND

A cold-water pipe is guaranteed earth ground; the cover-plate retaining screw on most AC outlet boxes is also at earth ground. If the retaining screw is to be used as your earth-ground, verify that it is at ground by measuring the resistance between it and a cold-water pipe with an ohmmeter. The reading should be zero ohms. If a cold-water pipe is not accessible, connect a 60-100 watt trouble light (not a neon lamp) between the hot side of the receptacle and the retaining screw. Try both slots, if necessary, to locate the hot side of the line, the lamp should light at normal brilliance if the screw is at ground potential. (See Fig. B)

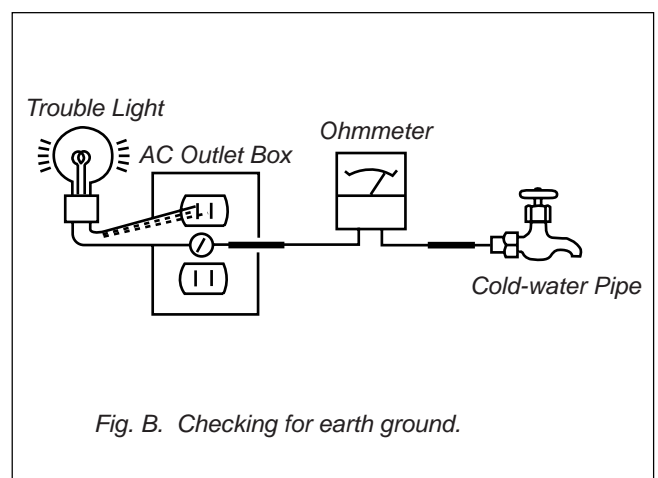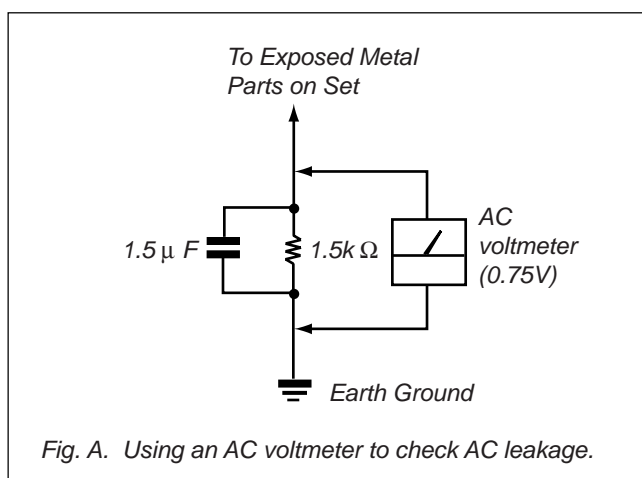



**CAUTION**

These servicing instructions are for use by qualified service personnel only.

To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

**WARNING!!**

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.

THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

**SAFETY-RELATED COMPONENT WARNING!!**

COMPONENTS IDENTIFIED BY SHADING AND MARK  $\triangle$  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL TO SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

**ATTENTION!!**

AFIN D'EVITER TOUT RISQUE DELECTROCUTION PROVENANT D'UN CHÂSSIS SOUS TENSION, UN TRANSFORMATEUR D'ISOLEMENT DOIT ETRE UTILISÉ LORS DE TOUT DEPANNAGE.

LE CHÂSSIS DE CE RECEPTEUR EST DIRECTEMENT RACCORDÉ À L'ALIMENTATION SECTEUR.

**ATTENTION AUX COMPOSANTS RELATIFS Á LA SÉCURITÉ!!**

LES COMPOSANTS IDENTIFIÉS PAR UNE FRAME ET PAR UNE MAPQUE  $\triangle$  SUR LES SCHÉMAS DE PRINCIPE, LES VUES EXPLOSÉES ET LES LISTES DE PIÉCES SONT D'UNE IMPORTANCE CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT. NE LES REMPLACER QUE PAR DES COMPOSANTS SONY DONT LE NUMÉRO DE PIÉCE EST INDIQUÉ DANS LE PRÉSENT MANUEL OU DANS DES SUPPLÉMENTS PUBLIÉS PAR SONY. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT SUSPECTÉ.

## TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Section</u>	<u>Title</u>	<u>Page</u>
<b>SPECIFICATIONS</b>		2	<b>4. DIAGRAMS</b>		
<b>REPLACING THE LAMP</b>		3	4-1. Block Diagram (1)		26
<b>1. SELF DIAGNOSIS FUNCTION</b>		11	Block Diagram (2)		27
<b>2. DISASSEMBLY</b>			Block Diagram (3)		28
2-1. Rear Cover		14	Block Diagram (4)		29
2-2. Chassis Block		15	Block Diagram (5)		30
2-3. Shield ATSC		16	Block Diagram (6)		31
2-4. Terminal Bracket		16	Block Diagram (7)		32
2-5. QT Board, QM Board		17	Block Diagram (8)		33
2-6. Main Shield		18	Block Diagram (9)		34
2-7. A1, B1, S1 Boards		18	Block Diagram (10)		35
2-8. Lamp Fan Unit		19	4-2. Frame Schematic Diagram		36
2-9. Power Block		19	4-3. Circuit Boards Location		37
2-10. Scirocco Fan		20	4-4. Schematic Diagrams		37
2-11. Unit Cover Assembly		20	(1) Schematic Diagram of A1 (1/6) Board		38
2-12. Optics Block Assembly		21	(2) Schematic Diagram of A1 (2/6) Board		39
2-13. Screen Frame Block Assembly		22	(3) Schematic Diagram of A1 (3/6) Board		40
2-14. Front Terminal Bracket		22	(4) Schematic Diagram of A1 (4/6) Board		41
2-15. Mirror Cover Block		23	(5) Schematic Diagram of A1 (5/6) Board		42
<b>3. ELECTRICAL ADJUSTMENTS</b>			(6) Schematic Diagram of A1 (6/6) Board		43
3-1. Picture Distortion Correction Mechanism		24	(7) Schematic Diagram of A1 (1/11) Board		44
3-1-1. V-TRAP Correction 1		24	(8) Schematic Diagram of B1 (2/11) Board		45
3-1-2. V-TRAP Correction 2		24	(9) Schematic Diagram of B1 (3/11) Board		46
3-1-3. Picture Rotation Correction 1		24	(10) Schematic Diagram of B1 (4/11) Board		47
3-1-4. Picture Rotation Correction 2		24	(11) Schematic Diagram of B1 (5/11) Board		48
3-2. Electrical Adjustment by Remote Commander		24	(12) Schematic Diagram of B1 (6/11) Board		49
3-2-1. Method of Setting the Service Adjustment Mode		24	(13) Schematic Diagram of B1 (7/11) Board		50
3-2-2. Service Mode Adjustment		24	(14) Schematic Diagram of B1 (8/11) Board		51
3-2-3. Memory Write Confirmation Method		25	(15) Schematic Diagram of B1 (9/11) Board		52
3-2-4. Adjusting Buttons and Indicator		25	(16) Schematic Diagram of B1 (10/11) Board		53
3-3. To Read Lamp and Panel Time		25	(17) Schematic Diagram of B1 (11/11) Board		54
3-4. Test Reset		25	(18) Schematic Diagram of C (1/11) Board		55
3-5. H/V Center Confirmation and Adjustment		25	(19) Schematic Diagram of C (2/11) Board		56
			(20) Schematic Diagram of C (3/11) Board		57
			(21) Schematic Diagram of C (4/11) Board		58
			(22) Schematic Diagram of C (5/11) Board		59
			(23) Schematic Diagram of C (6/11) Board		60
			(24) Schematic Diagram of C (7/11) Board		61
			(25) Schematic Diagram of C (8/11) Board		62
			(26) Schematic Diagram of C (9/11) Board		63
			(27) Schematic Diagram of C (10/11) Board		64
			(28) Schematic Diagram of C (11/11) Board		65
			(29) Schematic Diagram of G (1/2) Board		66
			(30) Schematic Diagram of G (2/2) Board		67

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Section</u>	<u>Title</u>	<u>Page</u>
(31)	Schematic Diagram of H1 Board .....	68	<b>5. EXPLODED VIEWS</b>		
(32)	Schematic Diagram of H2 Board .....	69	5-1.	Screen, Covers .....	96
(33)	Schematic Diagram of H3 Board .....	70	5-2.	Chassis Assembly .....	97
(34)	Schematic Diagram of QM (1/6) Board .....	71	5-3.	Optics Block .....	98
(35)	Schematic Diagram of QM (2/6) Board .....	72			
(36)	Schematic Diagram of QM (3/6) Board .....	73	<b>6. ELECTRICAL PARTS LIST</b>		
(37)	Schematic Diagram of QM (4/6) Board .....	74	• A1 Board .....	99	
(38)	Schematic Diagram of QM (5/6) Board .....	75	• B1 Board .....	112	
(39)	Schematic Diagram of QM (6/6) Board .....	76	• C Board .....	122	
(40)	Schematic Diagram of QT Board .....	77	• G Board .....	133	
(41)	Schematic Diagram of S1, S2 Boards .....	78	• H1 Board .....	137	
(42)	Schematic Diagram of T Board .....	79	• H2 Board .....	137	
4-5.	Printed Wiring Boards .....	80	• H3 Board .....	137	
(1)	A1 Board (Side A) .....	80	• QM Board .....	138	
(2)	A1 Board (Side B) .....	81	• QT Board .....	143	
(3)	B1 Board (Side A) .....	82	• S1 Board .....	144	
(4)	B1 Board (Side B) .....	83	• S2 Board .....	144	
(5)	C Board (Side A) .....	84	• T Board .....	144	
(6)	C Board (Side B) .....	85			
(7)	G Board (Side A) .....	86			
(8)	G Board (Side B) .....	87			
(9)	H1, H2 Boards .....	88			
(10)	H3 Board .....	89			
(11)	QM Board (Side A) .....	90			
(12)	QM Board (Side B) .....	91			
(11)	QT Board (Side A) .....	92			
(12)	QT Board (Side B) .....	93			
(13)	S1, S2, T Boards .....	94			
4-6.	Semiconductors .....	95			

## SECTION 1

### SELF DIAGNOSIS FUNCTION

#### 1. Summary of Self-Diagnosis Function

- This device includes a self-diagnosis function.
- In case of abnormalities, the POWER indicator automatically blinks. It is possible to predict the abnormality location by the number of blinks. The Instruction Manual describes blinking of the POWER indicator.
- If the symptom is not reproduced sometimes in case of a malfunction, there is recording of whether a malfunction was generated or not. Operate the remote command to confirm the matter on the screen and to predict the location of the abnormality.

#### 2. Diagnosis Items and Prediction of Malfunction Location

- When a malfunction occurs the POWER indicator only blinks for one of the following diagnosis items. In case of two or more malfunctions, the item which first occurred blinks. If the malfunctions occurred simultaneously, the item with the lower blink count blinks first.
- The screen display displays the results regarding all the diagnosis items listed below. The display "0" means that no malfunctions occurred.

Diagnosis Item	Number of times POWER indicator blinks	Probable Cause Location	Defected symptoms
Temp. over	2 times	-The periphery of lamp heats up abnormally	- No picture/No sound
Lamp cover	3 times	- Lamp cover is not attached securely.	- No picture/No sound
Fan error	4 times	- Fan1, 3, 4 power is not supplied. - Fan connector is not attached securely.	- No picture/No sound
Lamp driver	5 times	- Lamp driver is faulty.	- No picture/No sound
Power error	6 times	- D5V is not supplied.	- No picture/No sound
Audio prot	7 times	- Speaker line is shorted.	- No picture/No sound
Power OVP	8 times	-7V is over voltage.	- No picture/No sound
Device error	9 times	Temperature sensors, Bus decoder ICs (IC2000, 3150, 3200, 8804)	-No picture
Lamp error	LAMP-LED flashes	- Lamp for the light source burns out.	- No picture/No sound

### 3. Blinking count display of POWER/STANDBY indicator

- One blink is not used for self-diagnosis.

- Example

Diagnosis item	LED blinks
Lamp cover	3 times
Fan	4 times

LED ON : 0.3sec  
LED OFF : 0.3sec  
LED OFF : 3.0sec

#### - Release of POWER/STANDBY indicator blinking


The POWER/STANDBY indicator blinking display is released by removing the plug from the power or leaving for 2 minutes.

### 4. Self-diagnosis screen displays

- In cases of malfunctions where it is not possible to determine the symptom such as when the power goes off occasionally or when the screen disappears occasionally, there is a screen display on whether the malfunction occurred or not in the past (and whether the detection circuit operated or not) in order to allow confirmation.

#### <Screen Display Method>

- Quickly press the remote command button in the following order from the standby state.



↑  
Be aware that this differs from the method of entering the service mode (Vol +).

Error information	SELF CHECK
002 : LED blink times	002 : TEMP 001
TEMP : Panel Temp Error	003 : L_COVER 000
001 : Error count (Max 255)	004 : FAN 003
	005 : L_DRIVER 000
	006 : POWER 000
	007 : AUDIO 000
	008 : P_OVP 000
	009 : DEVICE 000
	101 : DTT_WDT 000
	102 : TVM_WDT 002
	103 : WEM_WDT 000
	104 : DEM_WDT 000
	12345-67890

**Reboot counter**

102 : Error number

TVM\_WDT : Reboot micro

002 : WDT count (Max 255)

**Boot count and total power on time**

Display rule

12345-67890 : alternately display

(ex.) Boot Count 13579 times

Total power on time 24680 hours

Each max is 99999

- \* The boot count is increased at all power on timing.  
(AC Off -> Power On, Main SW Off -> Power On, Standby -> Power On)
- \* The total power on time is written to NVM at 1 time per a hour.

- The results display is not automatically cleared. In case of repairs and after repairs, check the self-diagnosis screen and be sure to return the results display to "0".
- If the results display is not returned to "0" it will not be possible to judge a new malfunction after completing repairs.

#### <Method of Clearing Results Display>

1. Power off (Set to the standby mode)

2.  → Channel  → Vol  →

3. Channel  →

#### <Method of Ending Self-Diagnosis Screen>

- When ending the self-diagnosis screen completely, turn the power switch OFF on the remote commander or the main unit.


### 5. Self-Diagnosis function operation

2	: Temp over	When the inside temperature sensed with IC3150, IC3200 and IC2000 mounted on S1 board, S2 board and C board respectively exceed the threshold, DEM (Display Engine u-com) detects it and makes turn off the lamp.
3	: Lamp cover	When the lamp cover is opened or harness from T board is off, DEM detects it and makes turn off the lamp
4	: FAN error	When any FAN is stopping or harness is not connected correctly, DEM detects it and makes turn off the lamp
5	: Lamp Driver	When the ballast is not working with high voltage, DEM detects it and makes turn off the lamp
6	: Power error	When the voltage converted on 5V regulated from 11V is low, TVM (TV u-com) detects it and makes turn off the lamp.
7	: Audio	When DC is appeared by audio amp failure at speaker line, DEM detects it and makes turn off the lamp.
8	: Power-OVP	When the output voltage from 7V is abnormally high, TVM detects it and makes turn off the lamp.
9	: Device error	When the temperature sensor and bus decoder ICs do not return ACK on IIC bus to DEM, DEM detects it and makes turn off the lamp.
LAMP	: Lamp	When the lamp is broken, DEM detects it.


## SECTION 2 DISASSEMBLY

Note: Photographs in this section are KDS-50A2000/55A2000/60A2000. KDS-50A2020/55A2020/60A2020 are metallic black models, the structure is quite same as KDS-50A2000/55A2000/60A2000 though the color is different.

### 2-1. REAR COVER

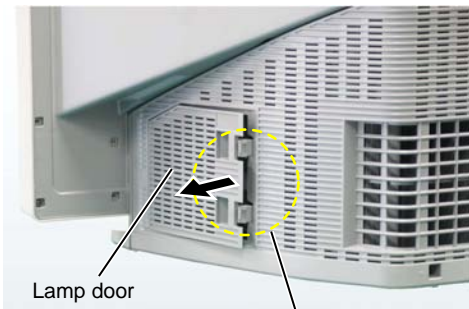

① Pull the claw

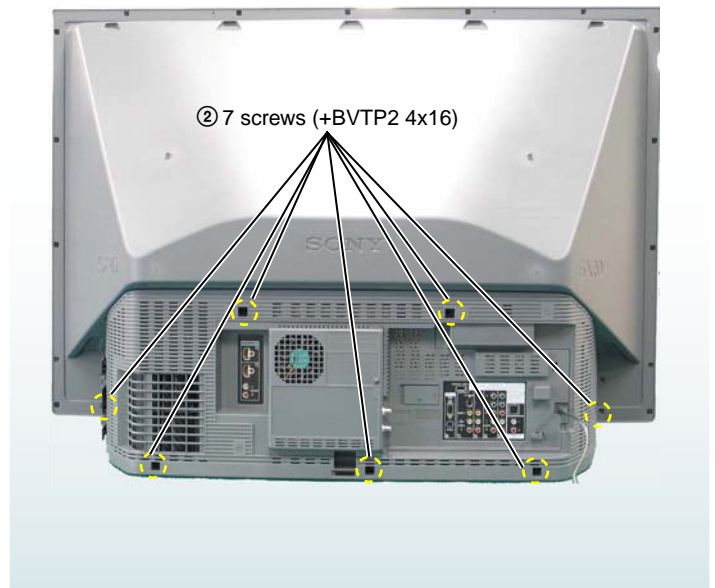

② 7 screws (+BVTP2 4x16)




③ Rear cover




2-2. CHASSIS BLOCK



② Screw (+BVTP2 4x16)

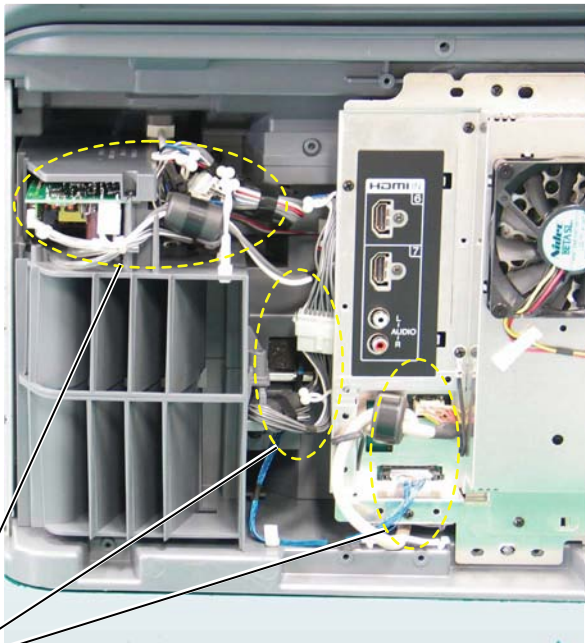


① Connectors

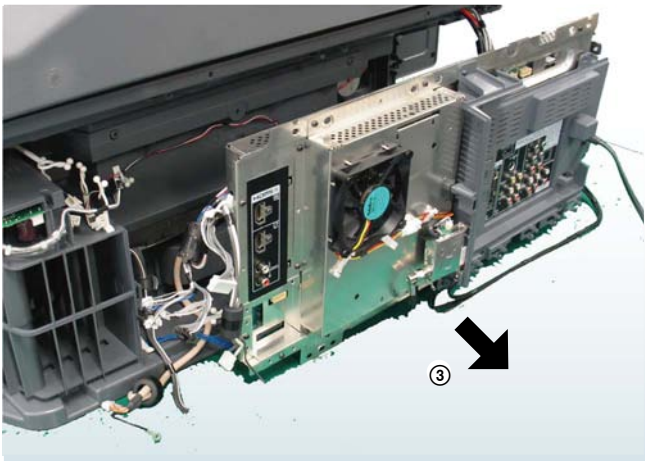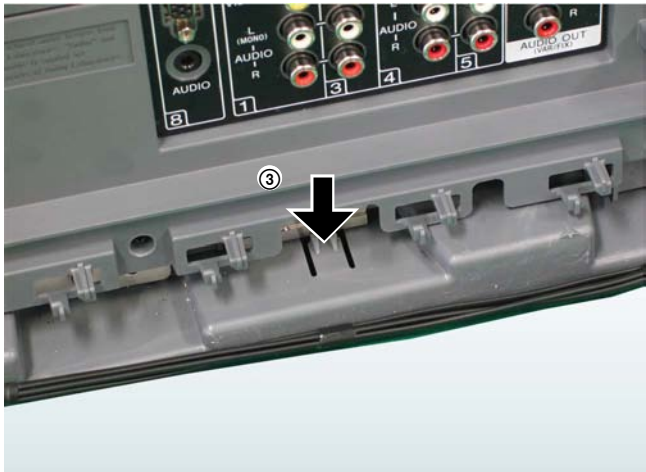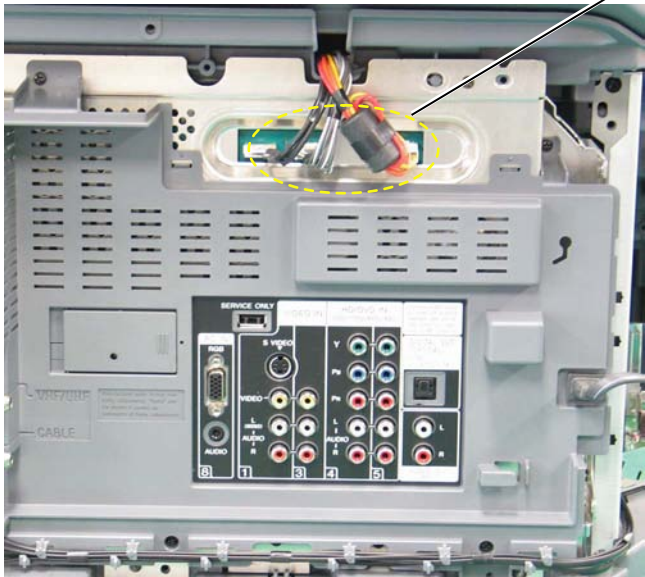






2-3. SHIELD ATSC

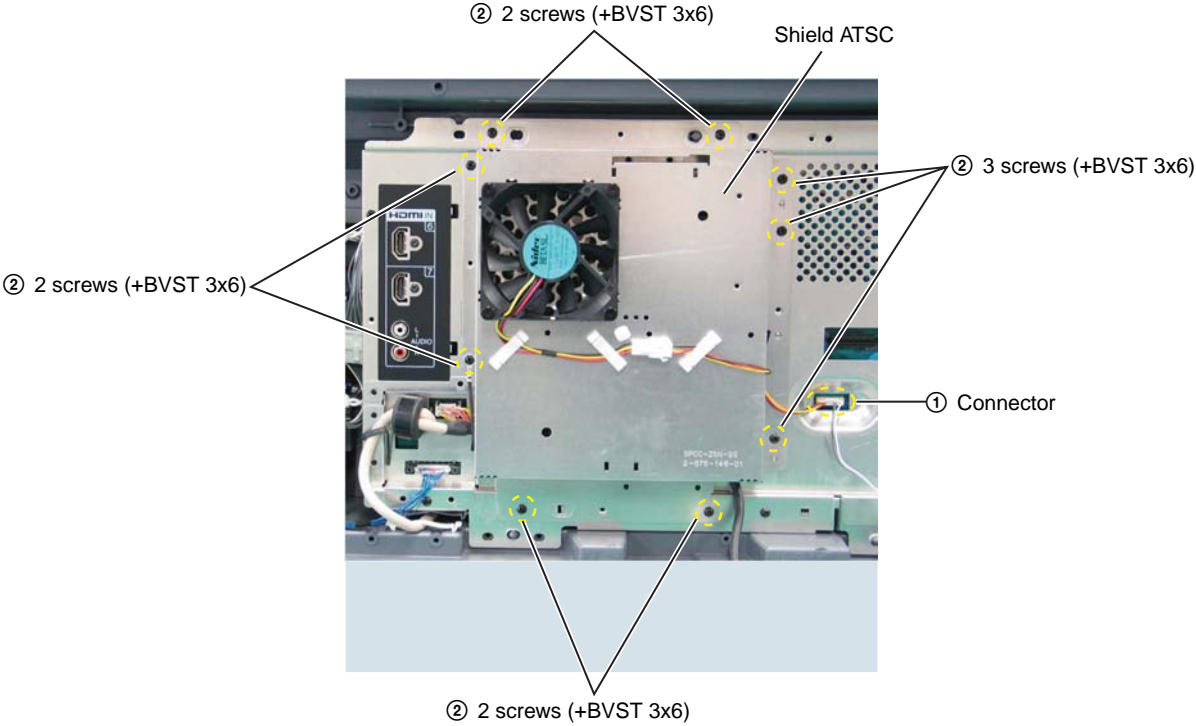


2-4. TERMINAL BRACKET

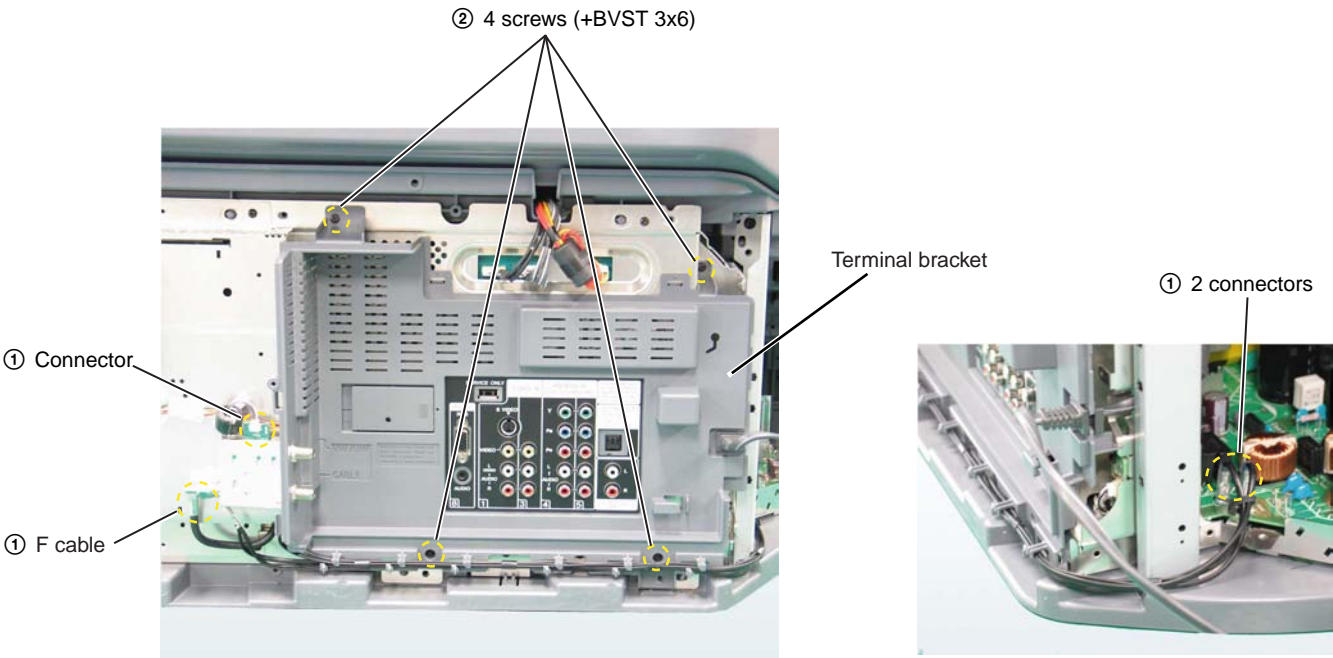

2-5. QT BOARD, QM BOARD

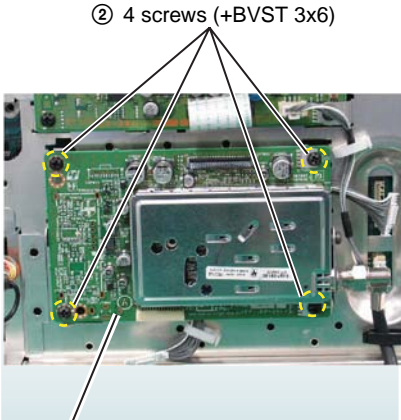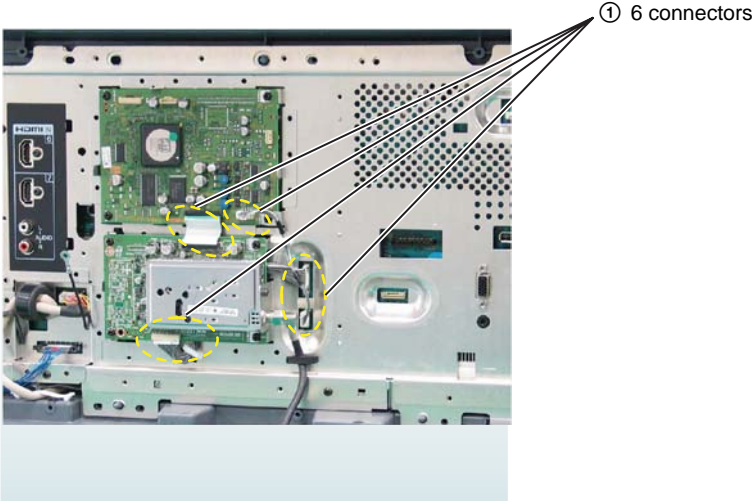


③ QT board

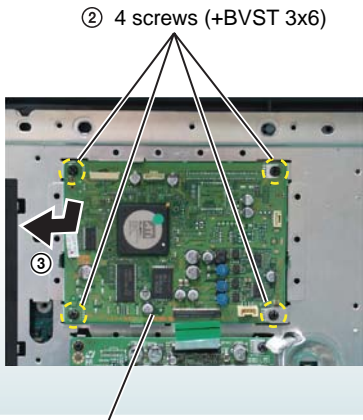


④ QM board


Be careful about the connector connected between QM board and A1 board.

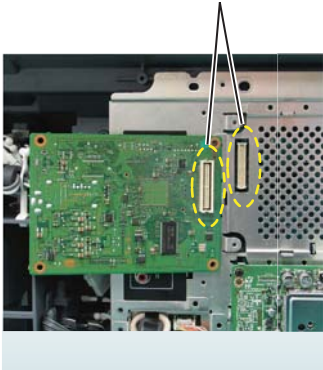


2-6. MAIN SHIELD

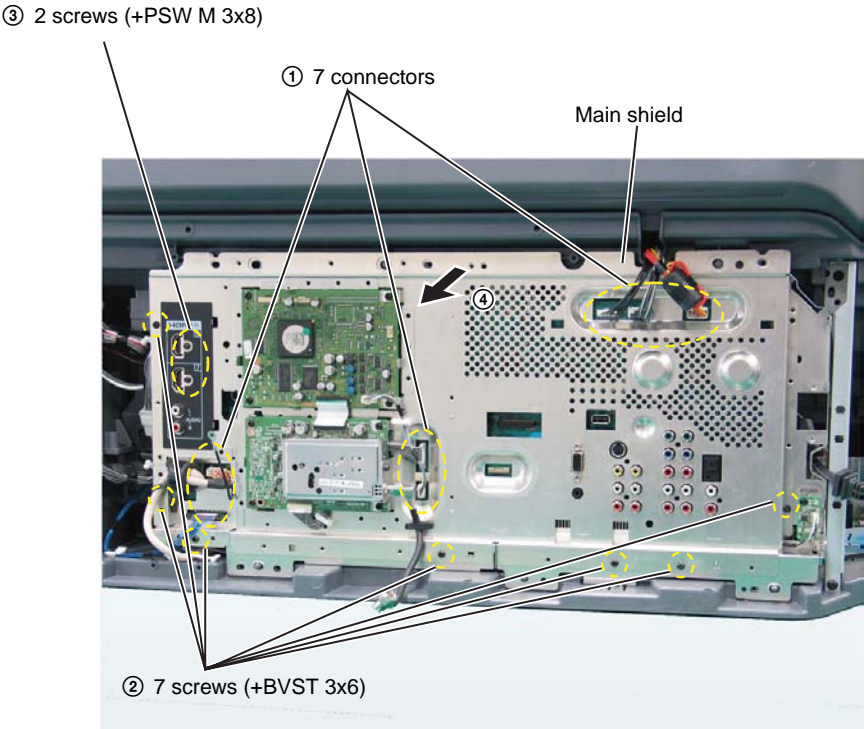


2-7. A1, B1, S1 BOARD

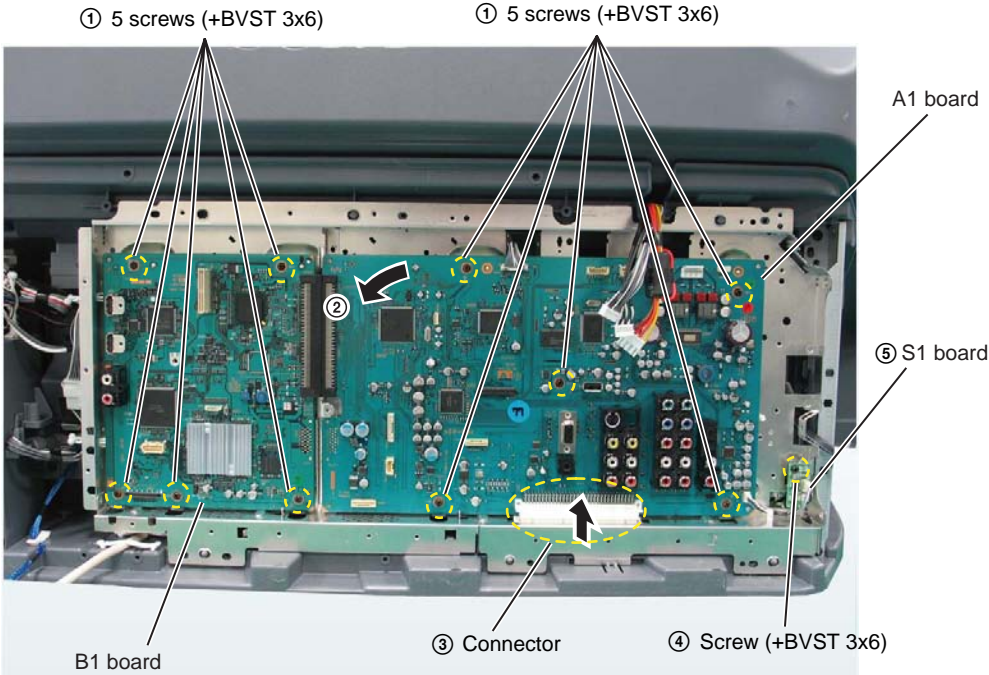


2-8. LAMP FAN UNIT

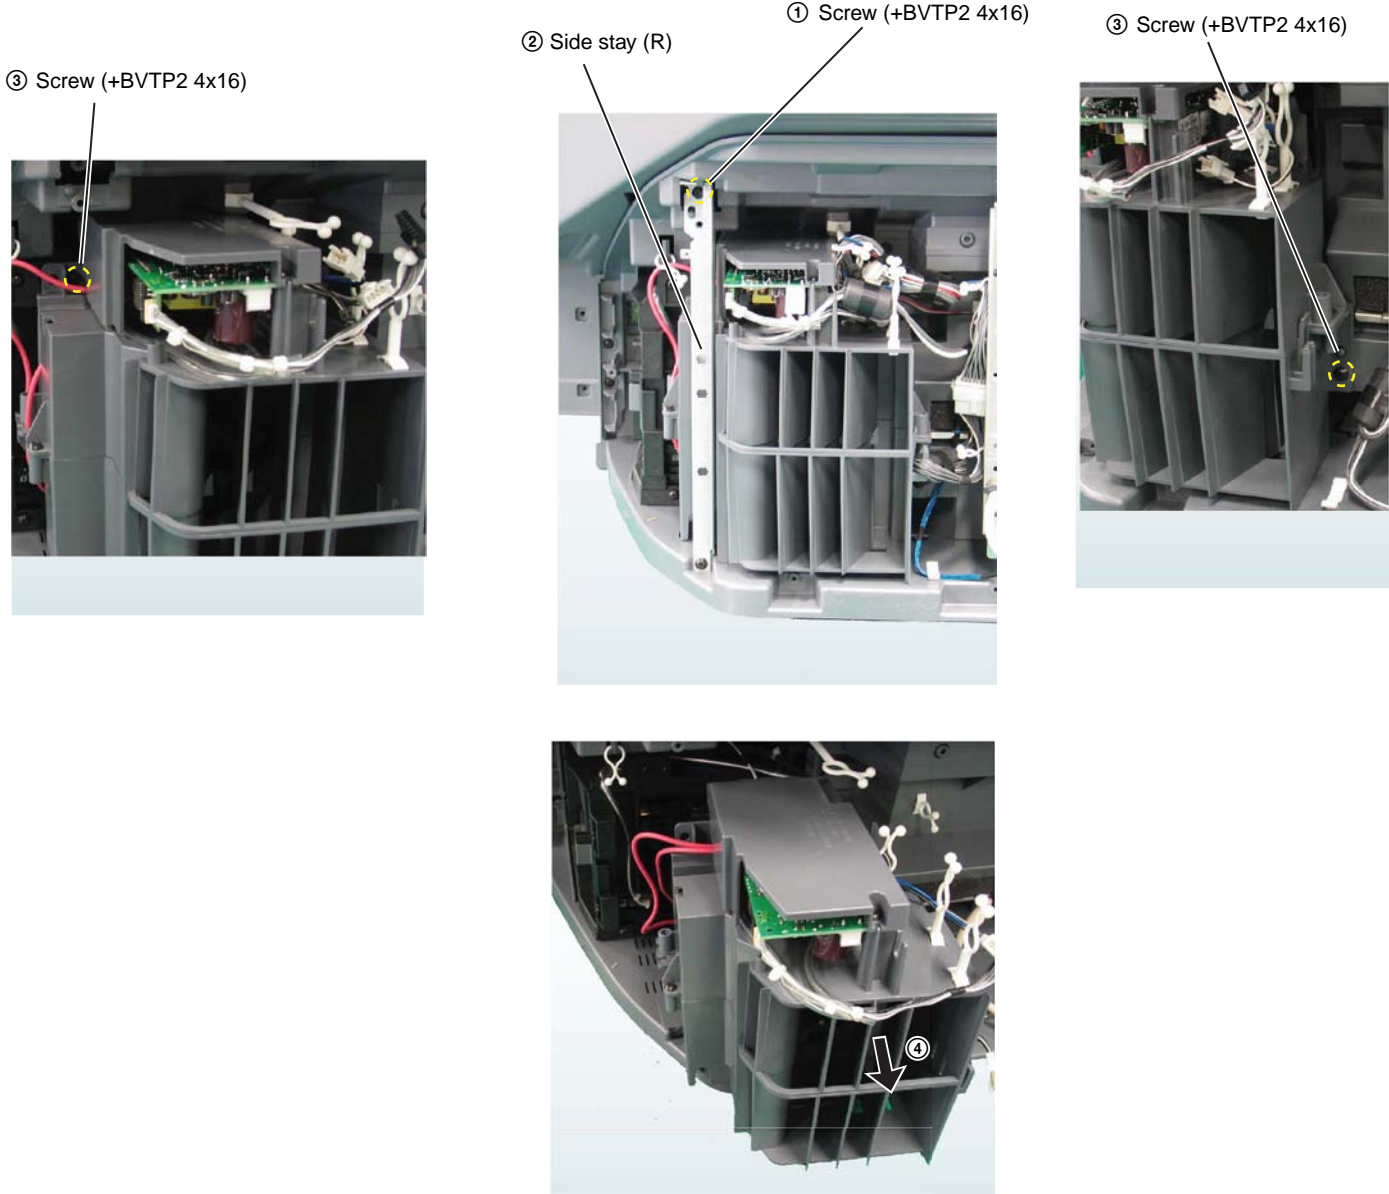


2-9. POWER BLOCK

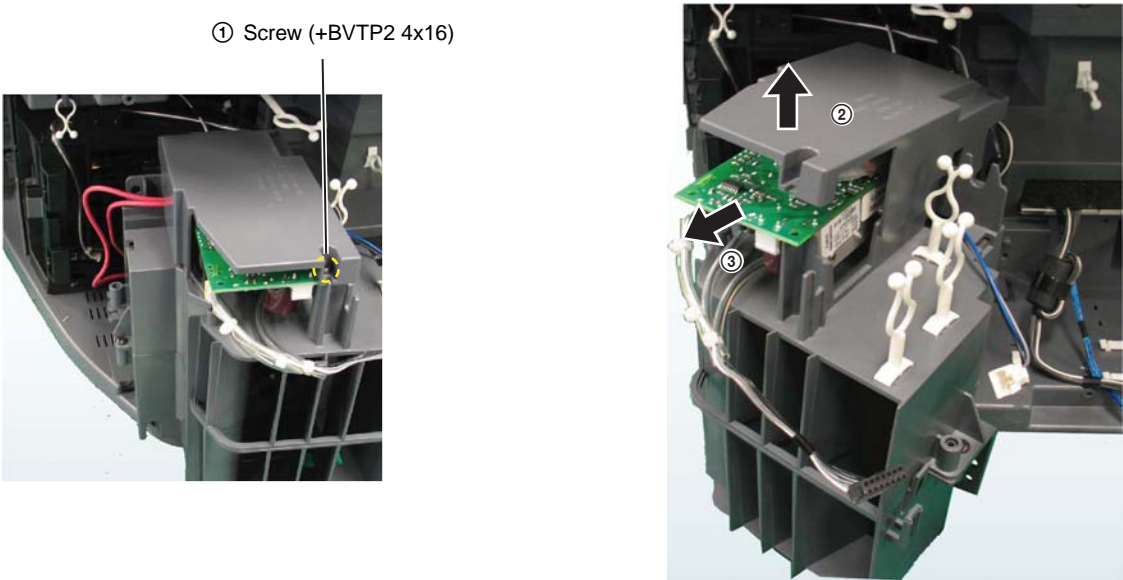

2-10. SCIROCCO FAN


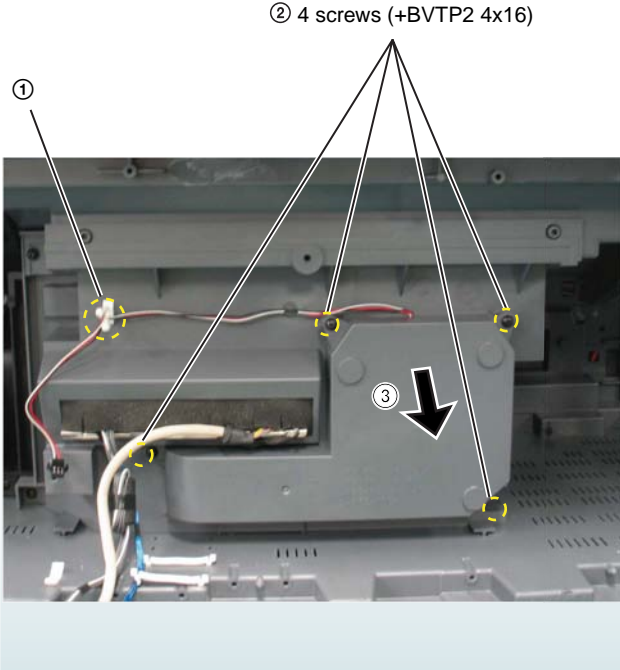


2-11. UNIT COVER ASSEMBLY

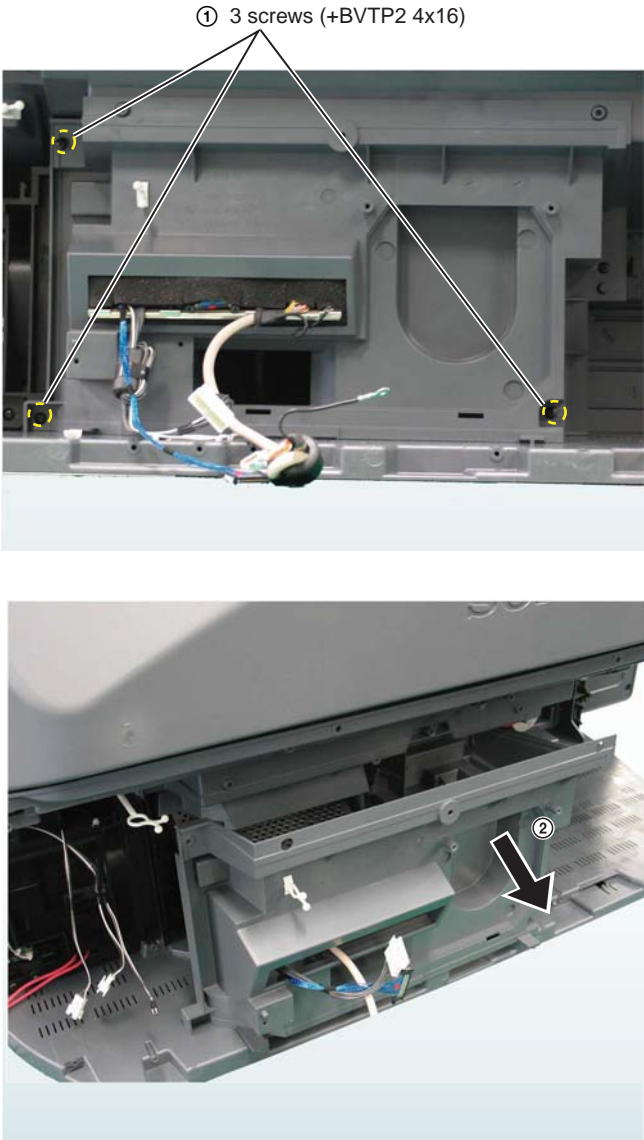

2-12. OPTICS BLOCK ASSEMBLY

① 2 screws (+BVTP2 4x16)

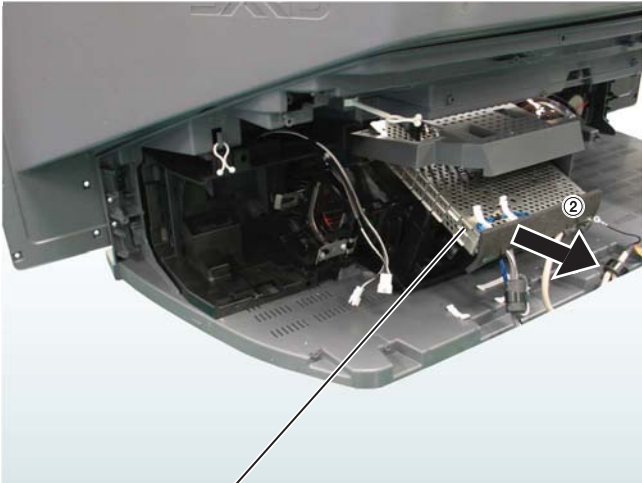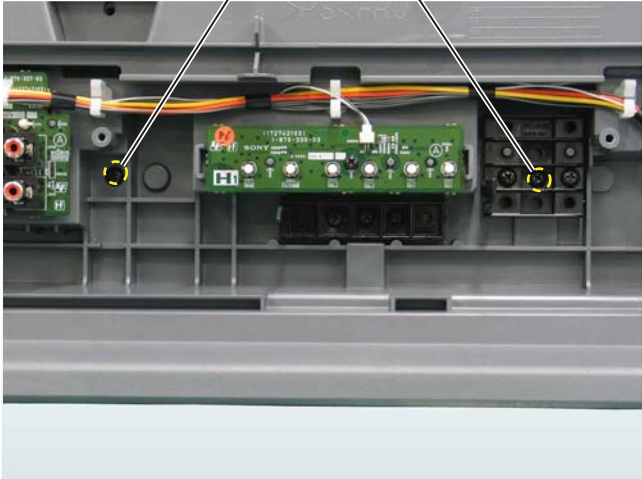




Optics block assembly

2-13. SCREEN FRAME BLOCK ASSEMBLY

50A2020




55A2020/60A2020

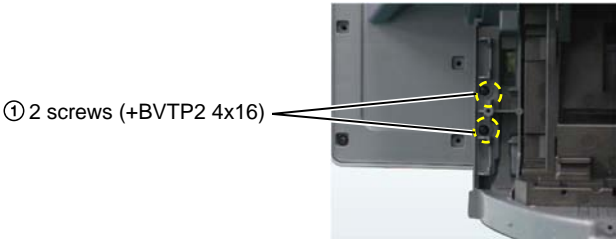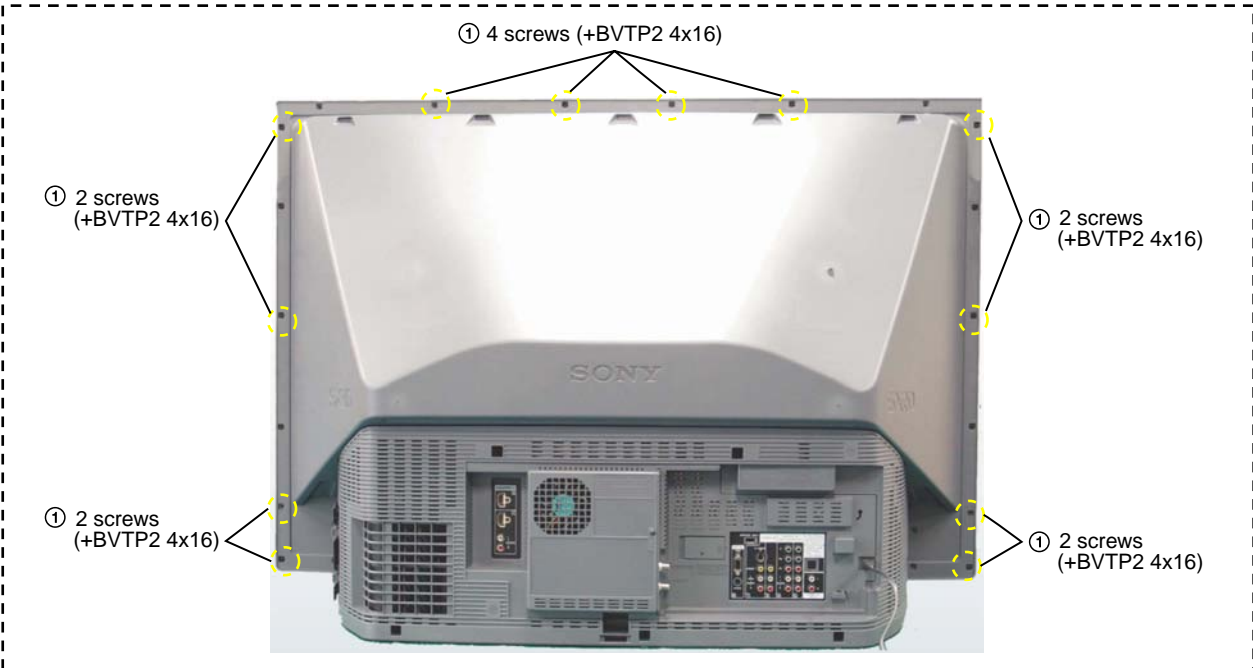

**2-14. FRONT TERMINAL BRACKET**

- ② Remove 7 claws of front terminal bracket by inserting the pin 5 to 10mm to the 7 square holes on the edge of front terminal bracket.  
At this time, pay attention not to scratch front terminal bracket.

③ 2 screws (+BVTP2 4x16)

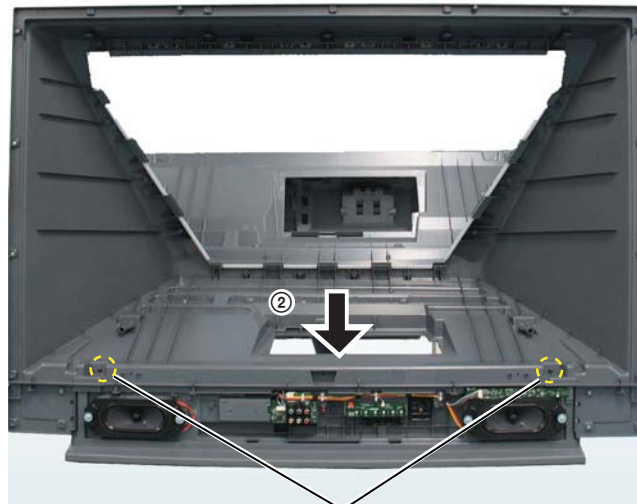**2-15. MIRROR COVER BLOCK**

① 2 screws (+BVTP2 4x16)







## SECTION 3 ELECTRICAL ADJUSTMENTS

### 3-1. PICTURE DISTORTION CORRECTION MECHANISM



#### 3-1-1. V-TRAP Correctin 1

In case of moving the V spacer by changing the position of center screw on the V spacer 2 to 1, the picture center goes down and square to trapezoid as shown in figure.

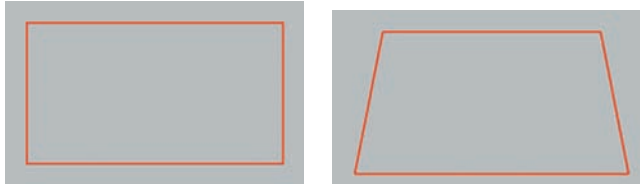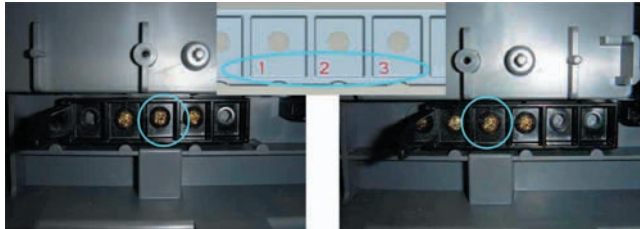



#### 3-1-2. V-TRAP Correctin 2

In case of moving the V spacer by changing the position of center screw on the V spacer 2 to 3, the picture center goes up and square to trapezoid as shown in figure.

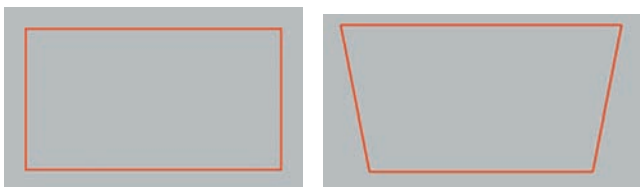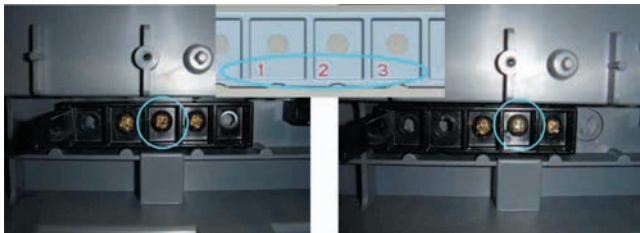



#### 3-1-3. Picture Rotation Correctin 1

In case of moving the R spacer by changing the position of screws on the R spacer B to A, the picture rotates clockwise as shown in figure.

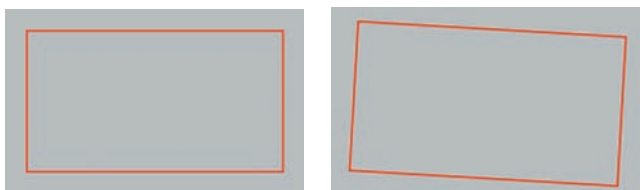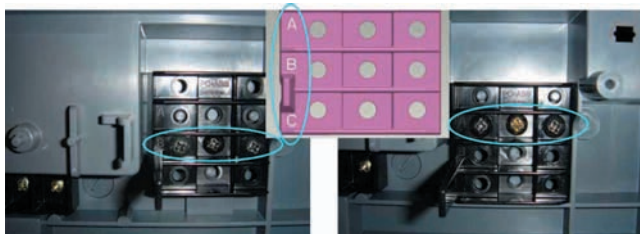

#### 3-1-4. Picture Rotation Correctin 2

In case of moving the R spacer by changing the position of screws on the R spacer B to C, the picture rotates counterclockwise as shown in figure.

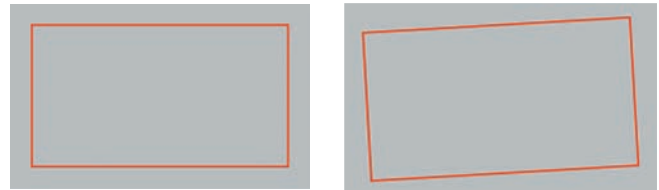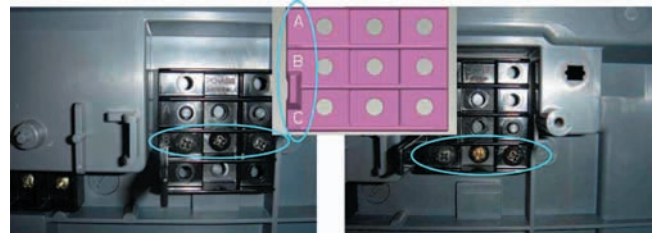

### 3-2. ELECTRICAL ADJUSTMENT BY REMOTE COMMANDER

By using remote commander (RM-YD010), all circuit adjustments can be made.

**NOTE : Test Equipment Required.**

1. Pattern Generator (with component outputs)
2. Oscilloscope
3. Digital multimeter

#### 3-2-1. Method of Setting the Service Adjustment Mode

1. Standby mode. (Power off)
2. **DISPLAY** → **5** → **VOL (+)** → **TV POWER** on the remote commander.

(Press each button within a second.)

The following service screen will appear.

Category Name	Item No.	Data	Mode
VERSION VER	0	0	SERVICE TVMICRO
Item Name			Input Signal
F/A : xxxxxxxx			
CBA : xxxxxxxx			

Category Name	Item No.	Data
D9671-1 12CSCAL	0	0 G
Item Name		
96H 28DEG		
9CH 24DEG		
LCD PJ ENGINE VER.10.00B		
03/10/07 732B		

<LCD PROJECTOR ENGINE>

#### 3-2-2. Service Mode Adjustment

1. The SCREEN displays the item being adjusted.
2. Press “①” or “④” on the remote commander to select the adjustment item.
3. Press “③” or “⑥” on the remote commander to change the data.
4. Press “②” or “⑤” on the remote commander to select the category.
5. If you want to recover the latest values press “⑩” then “**ENTER**” to read the memory.
6. Press “**MUTING**” then “**ENTER**” to write into memory.
7. Turn power off.


<Method of setting the shipping condition>

1. Service Adjustment mode.
2. Press “8” then “ENTER”
3. Wait until appearing “Initial Setup” display.
4. Disconnect AC plug and connect again to change factory reset condition completely.

### 3-2-3. Memory Write Confirmation Method

1. After adjustment, turn power off with the remote commander.
2. Turn power on and set to service mode.
3. Call the adjusted items again and confirm they were adjusted.

### 3-2-4. Adjusting Buttons and Indicator

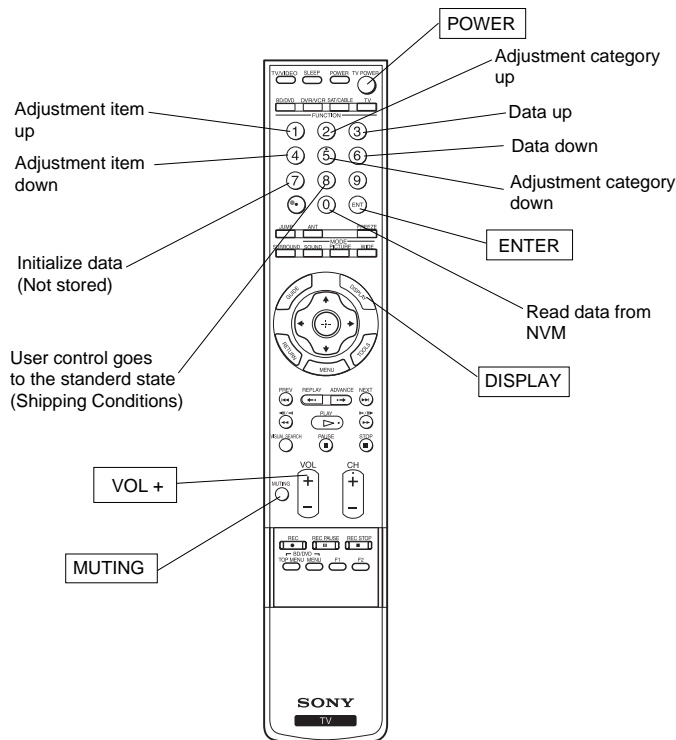

RM-YD010

### FUNCTION OF KEYS ON COMMANDER

- ① : Changes adjustment item. (item No. moves up)
- ④ : Changes adjustment item. (item No. moves down)
- ② : Changes adjustment category. (category moves up)
- ⑤ : Changes adjustment category. (category moves down)
- ③ : Changes data value. (up)
- ⑥ : Changes data value. (down)

#### Commander Function

Button	Mode	Description
[MUTING] + [ENTER]	WRITE	Writes data to NVM.
① + [ENTER]	READ	Reads data from NVM.
⑧ + [ENTER]	RESET	Set the shipping condition.

### 3-3. To read Lamp and Panel time

The lamp and panel time of the set are displayed as follows .

#### <Enter the service mode>

1. Press the keys of the remote commander in rapid sequence as follows , when the set is in standby mode.

[DISPLAY] → Channel [5] → Vol [ + ] → [POWER]

2. Press the “JUMP” key [3 times]. You’ll get into DE-micro service menu .
3. Press “2” key several times until it shows the following display.

Example

PANEL	SERVICE
21 Timer	
0 LMP	14
Diff	1 60Hz

This screen reads “Total lamp time is 14 hours”. To reset lamp time, press “1” to set the reset. Press “3”, “MUTE” and “ENTER” keys in sequence. WRI-EXE(Red Character) is momentarily displayed and LampTM will be reset to “0”.

4. Press “1” key several times until it shows the following display.

Example

PANEL	SERVICE
21 Timer	
1 LMPRST	0
Diff	1 60Hz

5. To check Panel Time, press “1” key [1 more times] at the previous display of Lamp Time.

The following display will be shown.

Example

PANEL	SERVICE
21 Timer	
2 OPERAT	3
Diff	1 60Hz

#### <To get out of the Service menu>

The Service menu is cleared by turning off the set with a remote commander or the power switch .

### 3-4. Test Reset

The user settings can be reset to the factory default condition as follows.

1. Press “TEST” and “RESET” key in sequence when the set is ON . The LAMP, TIMER and POWER LED light and the picture is muted. After about 5 seconds the LAMP and TIMER LED go off, and the color of POWER LED changes from amber to green. After another 10 seconds the reset is completed and the initial set-up display appears.

### 3-5. H/V Center Confirmation and Adjustment


Please check the picture horizontal/vertical center after the replacement of the following parts .

- Optical block
- Top assembly

1. Check H/V center with 480i monoscope signal in “Full” mode .
2. If the center is shifted , adjust it with the following service items .


Please record the steps shifted as  $\triangle$  DFD 16 and  $\triangle$  CXD9713 .

DEM/TG H\_CENTER (for H center)  
V\_CENTER (for V center)

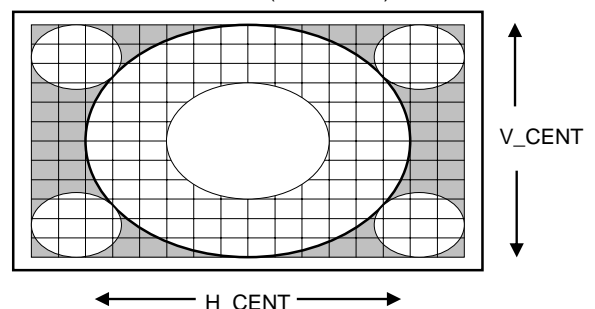


SECTION 4  
DIAGRAMS

4-1. BLOCK DIAGRAM (1)

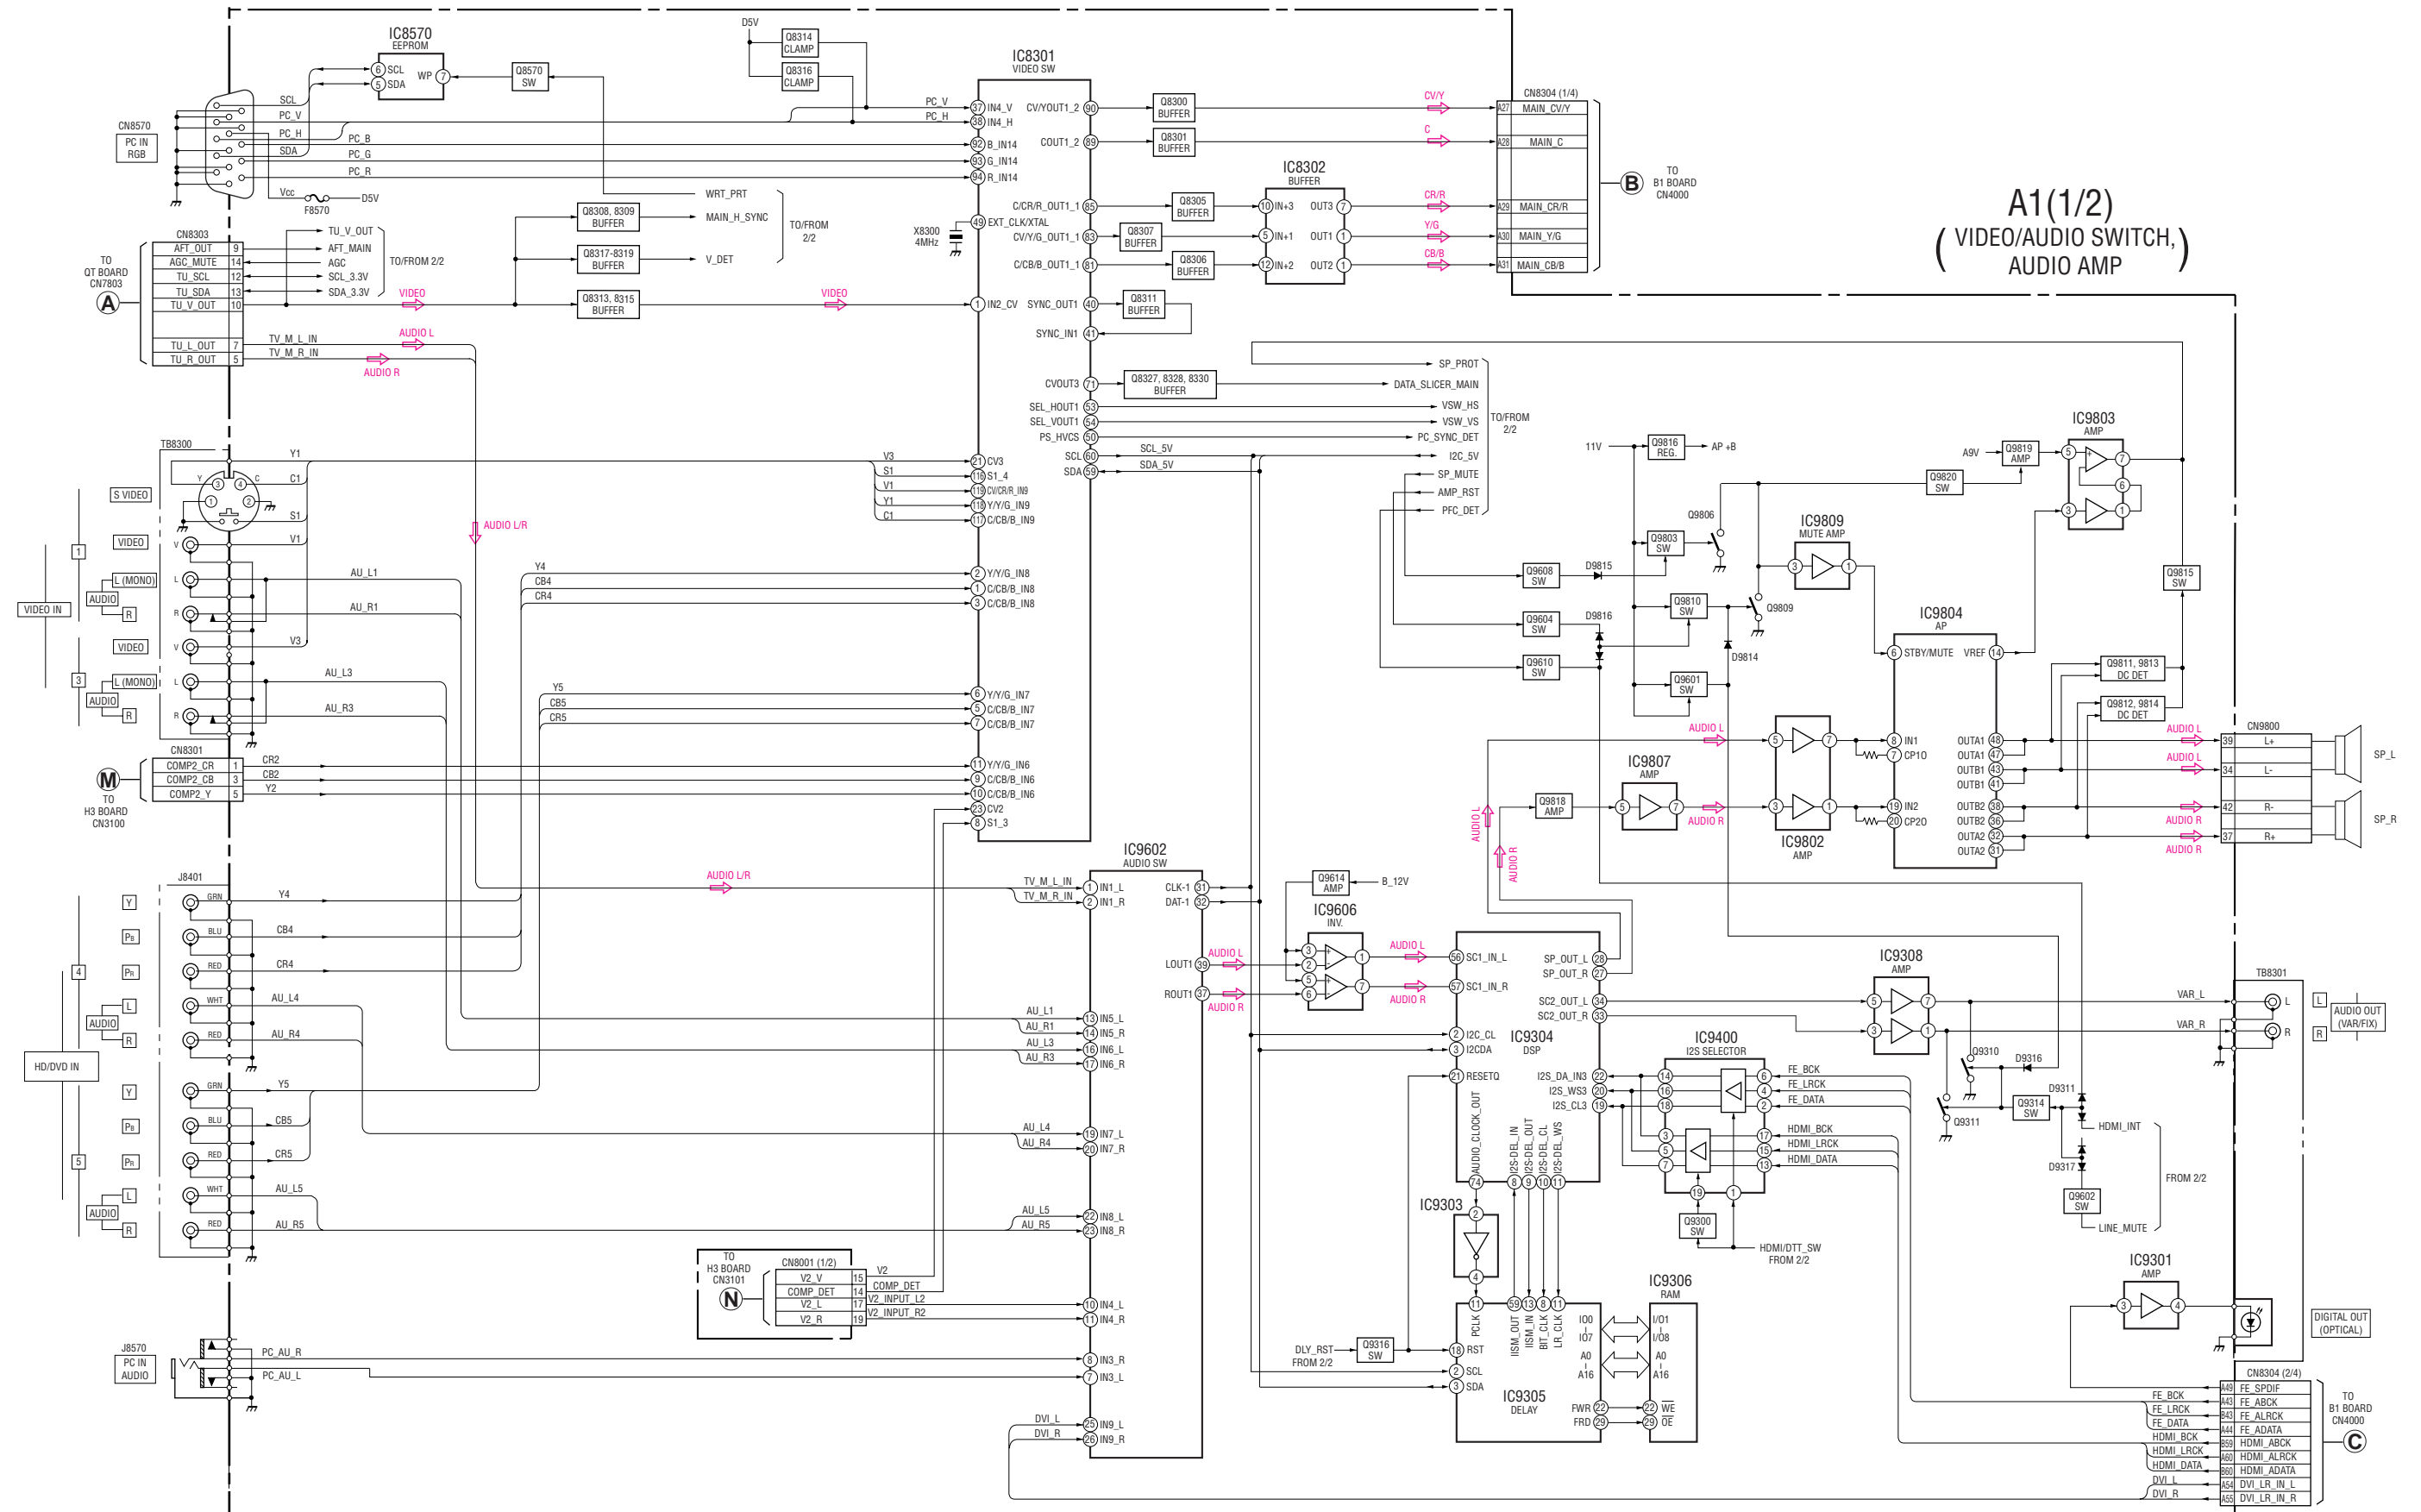


BLOCK DIAGRAM (2)

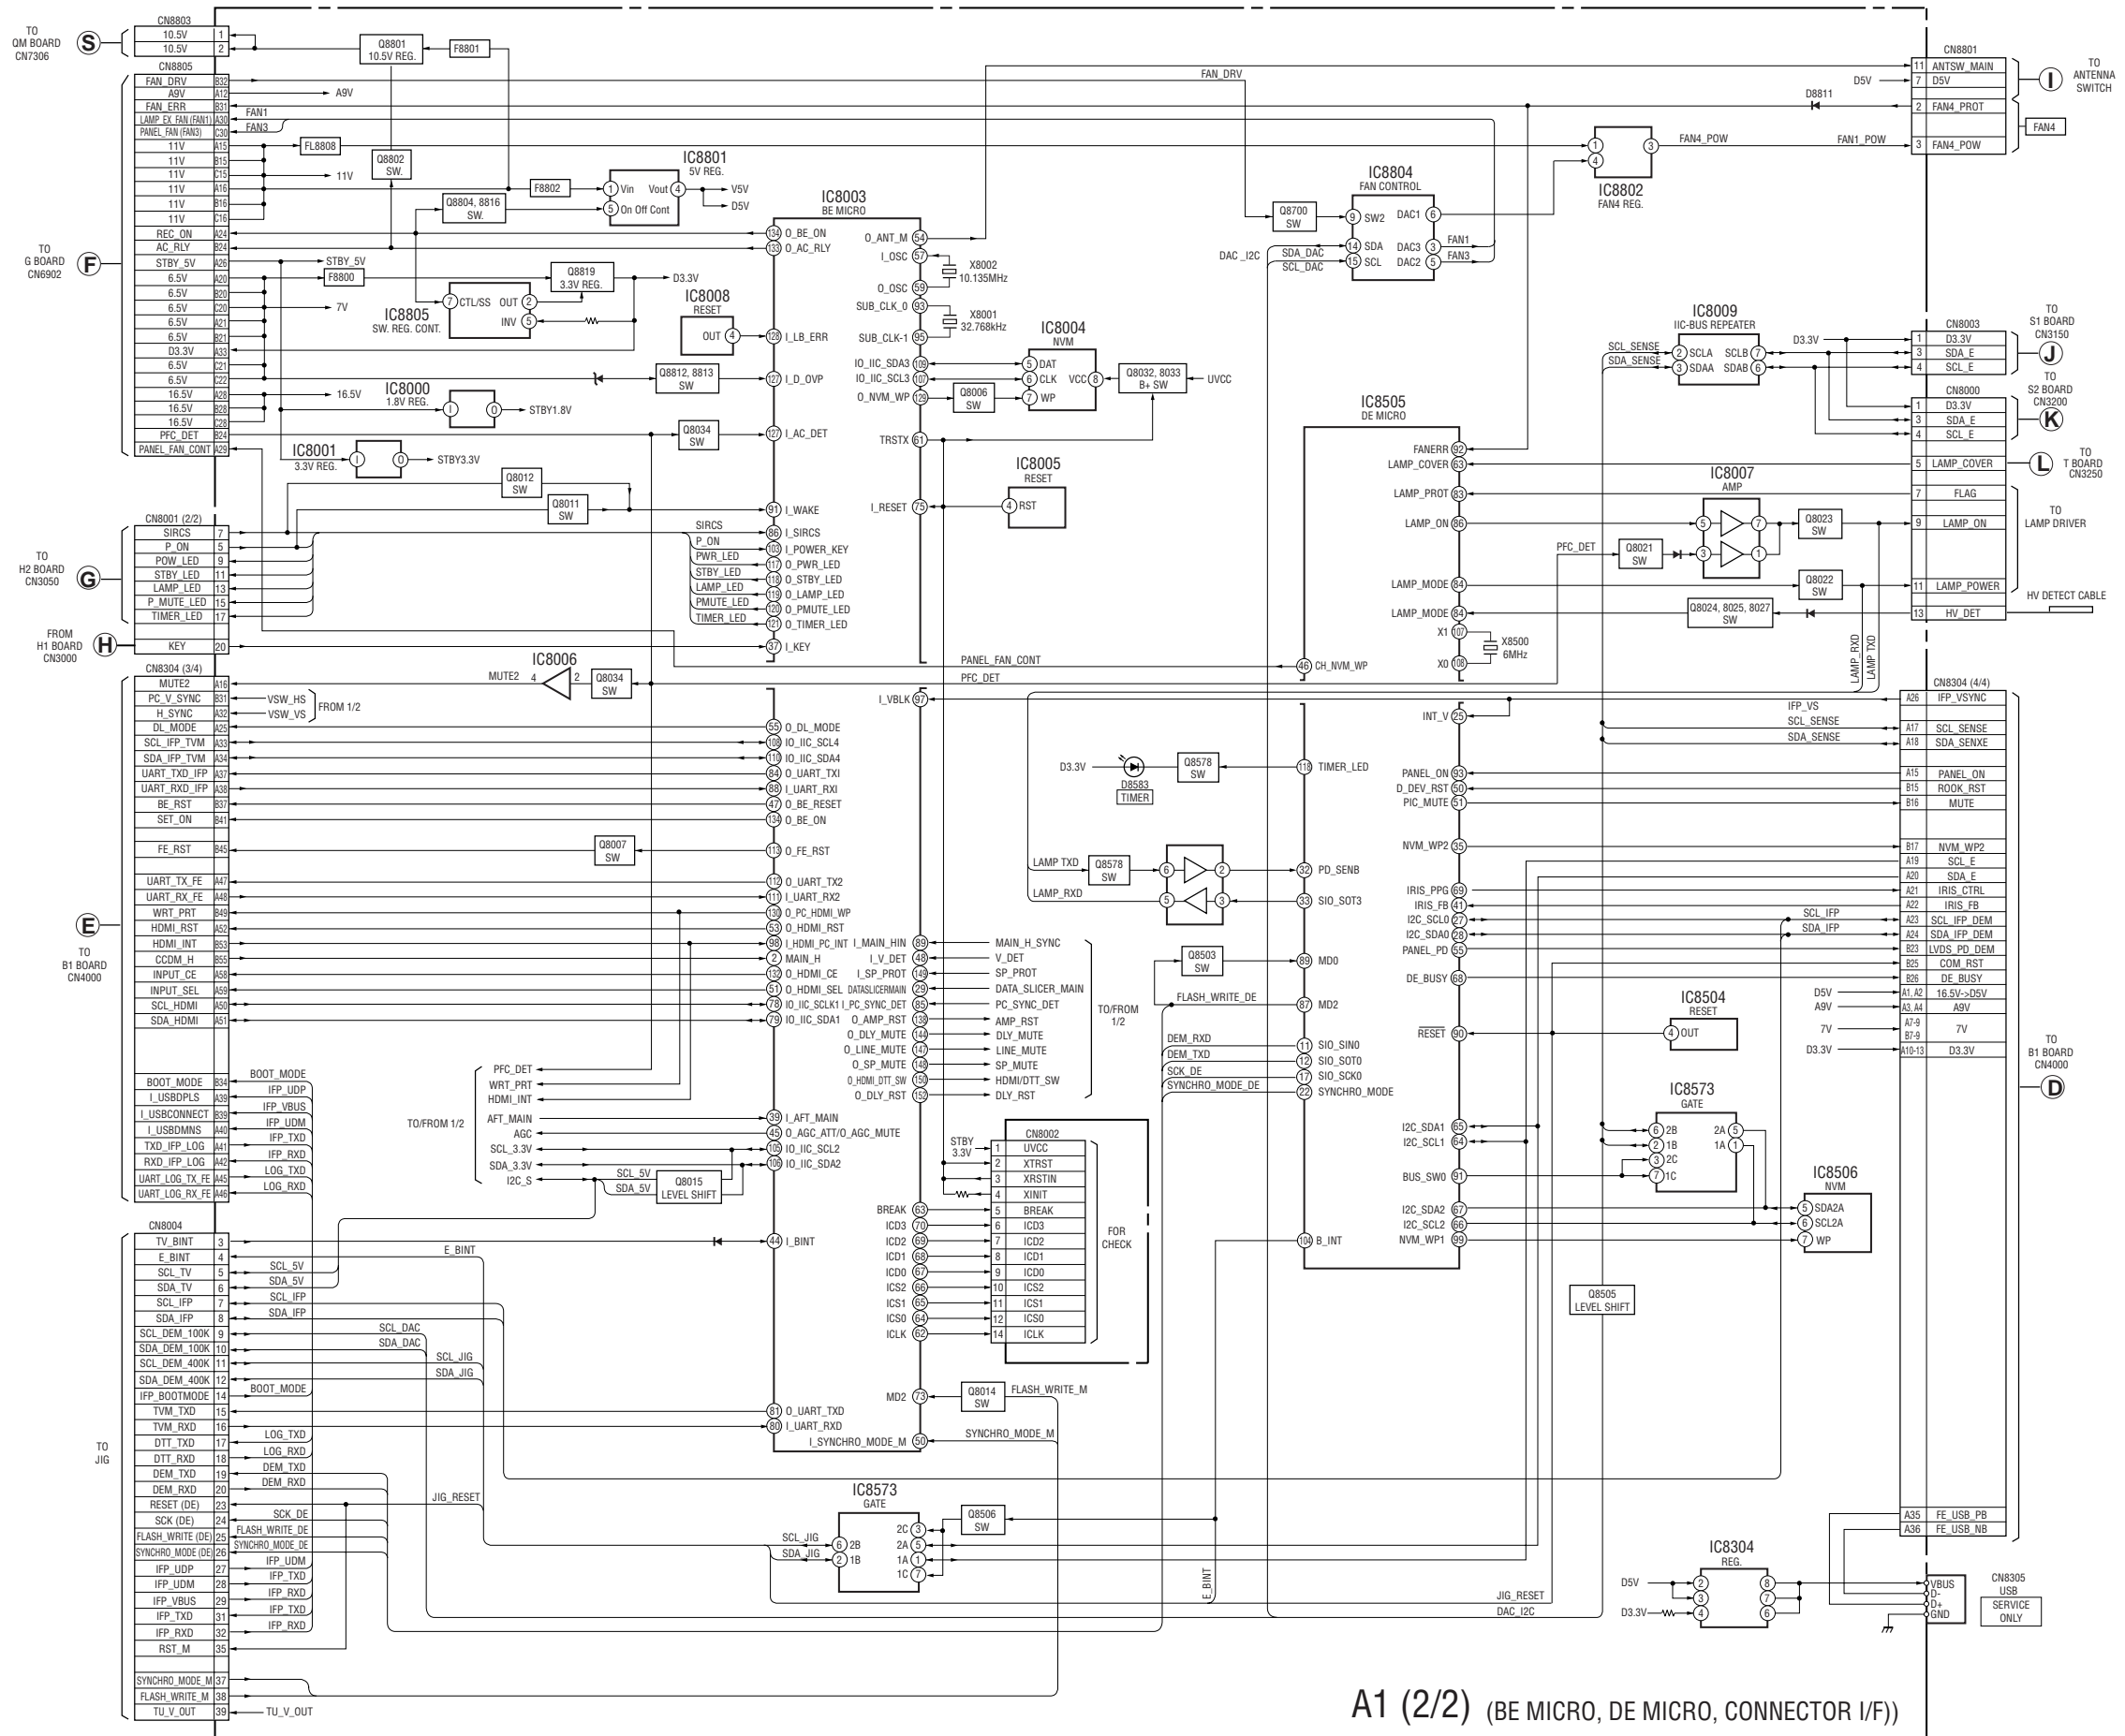


A1 (2/2) (BE MICRO, DE MICRO, CONNECTOR I/F)

**BLOCK DIAGRAM (3)**

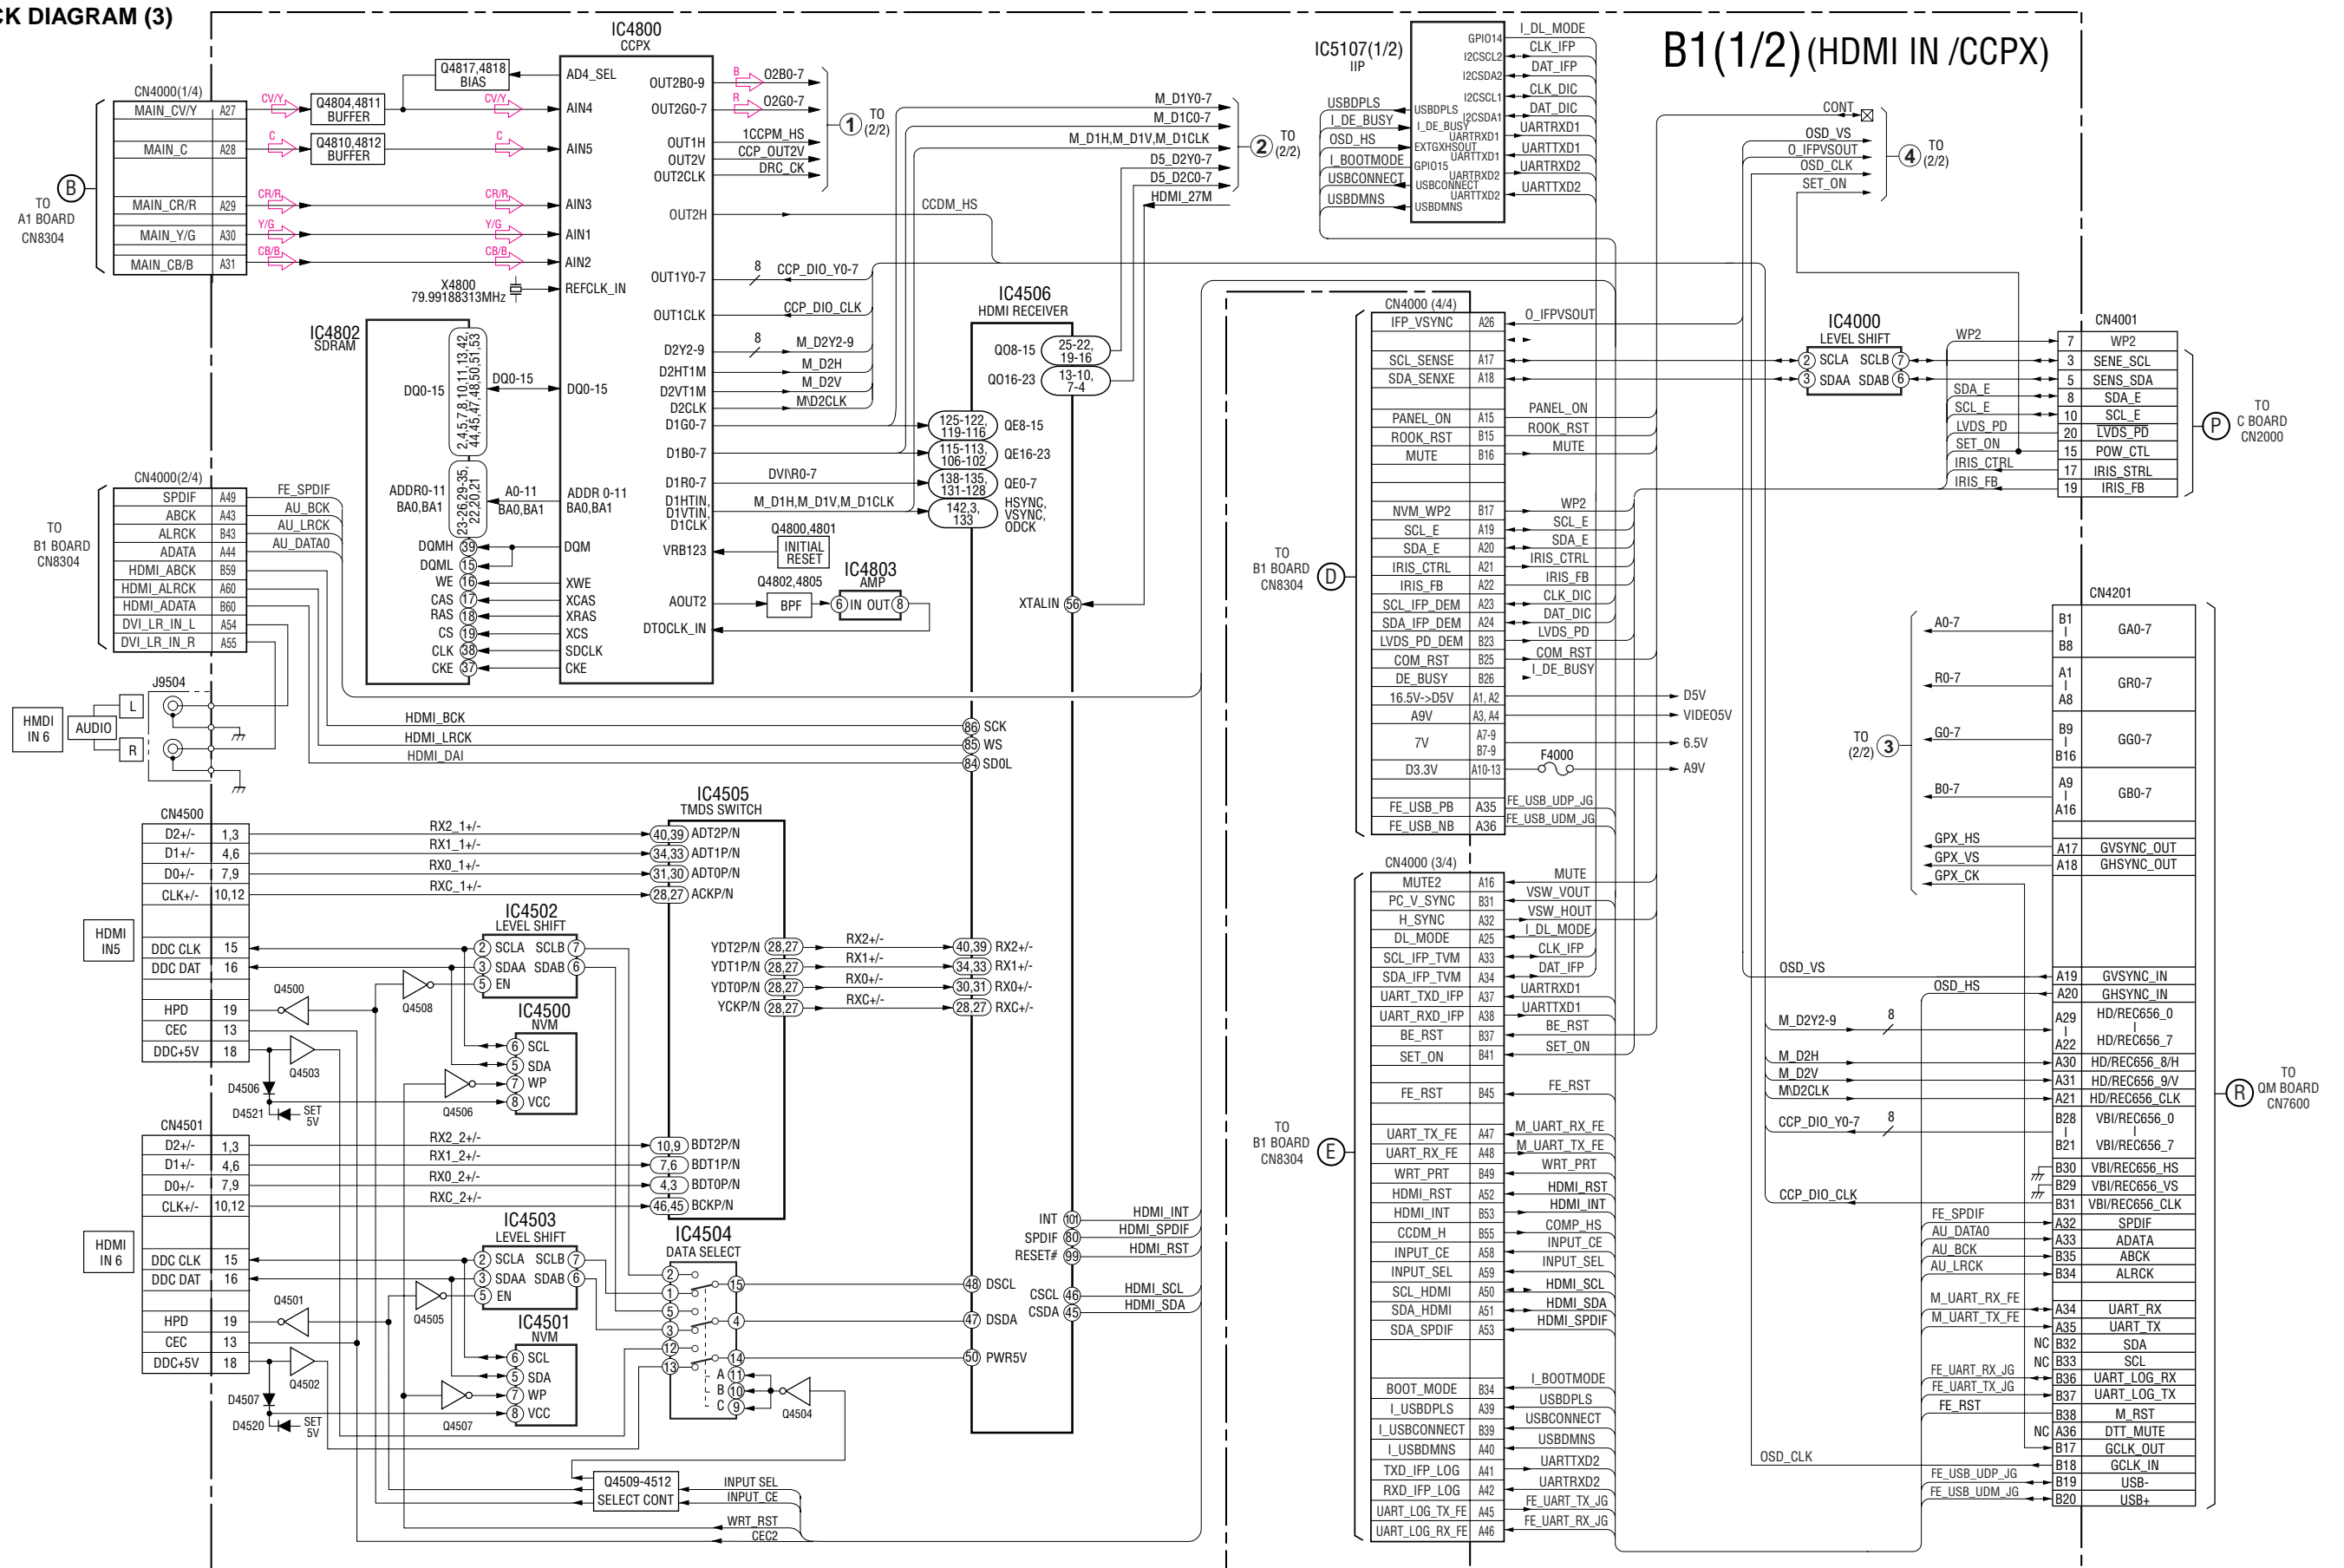


BLOCK DIAGRAM (4)

B1(2/2) (CHROMA DEODER /IFP)

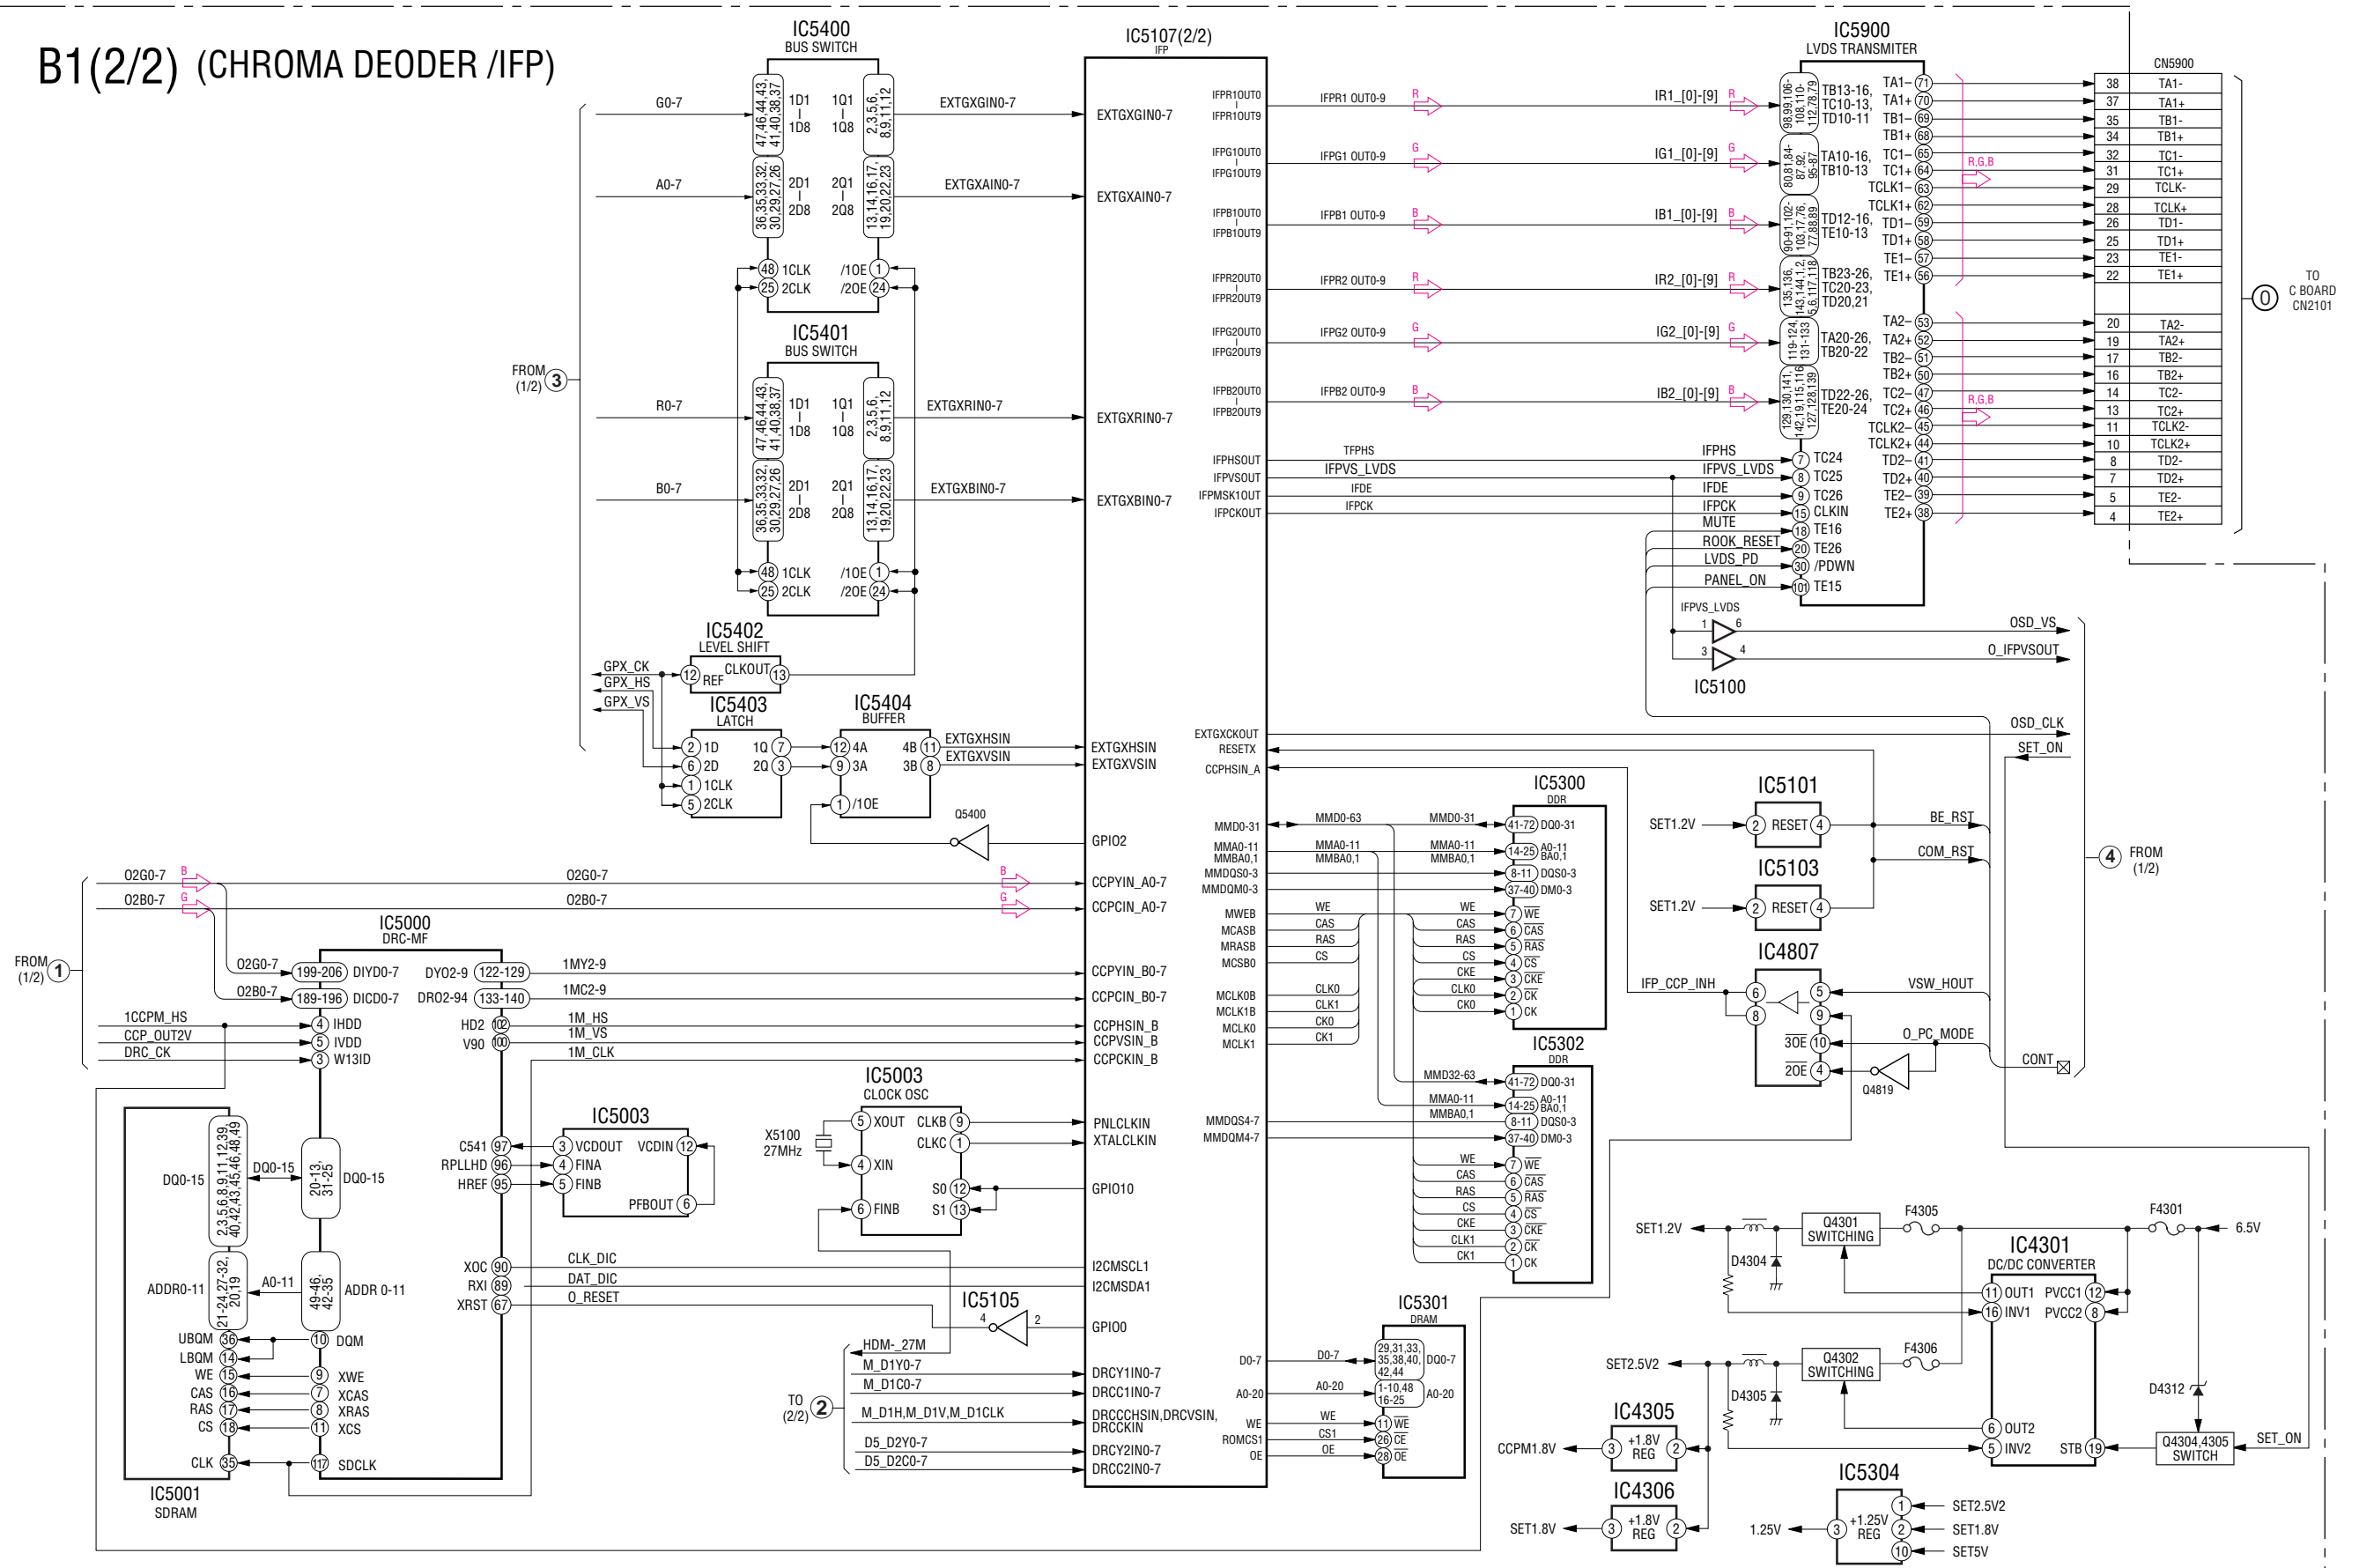


TO C BOARD CN2101

BLOCK DIAGRAM (5)

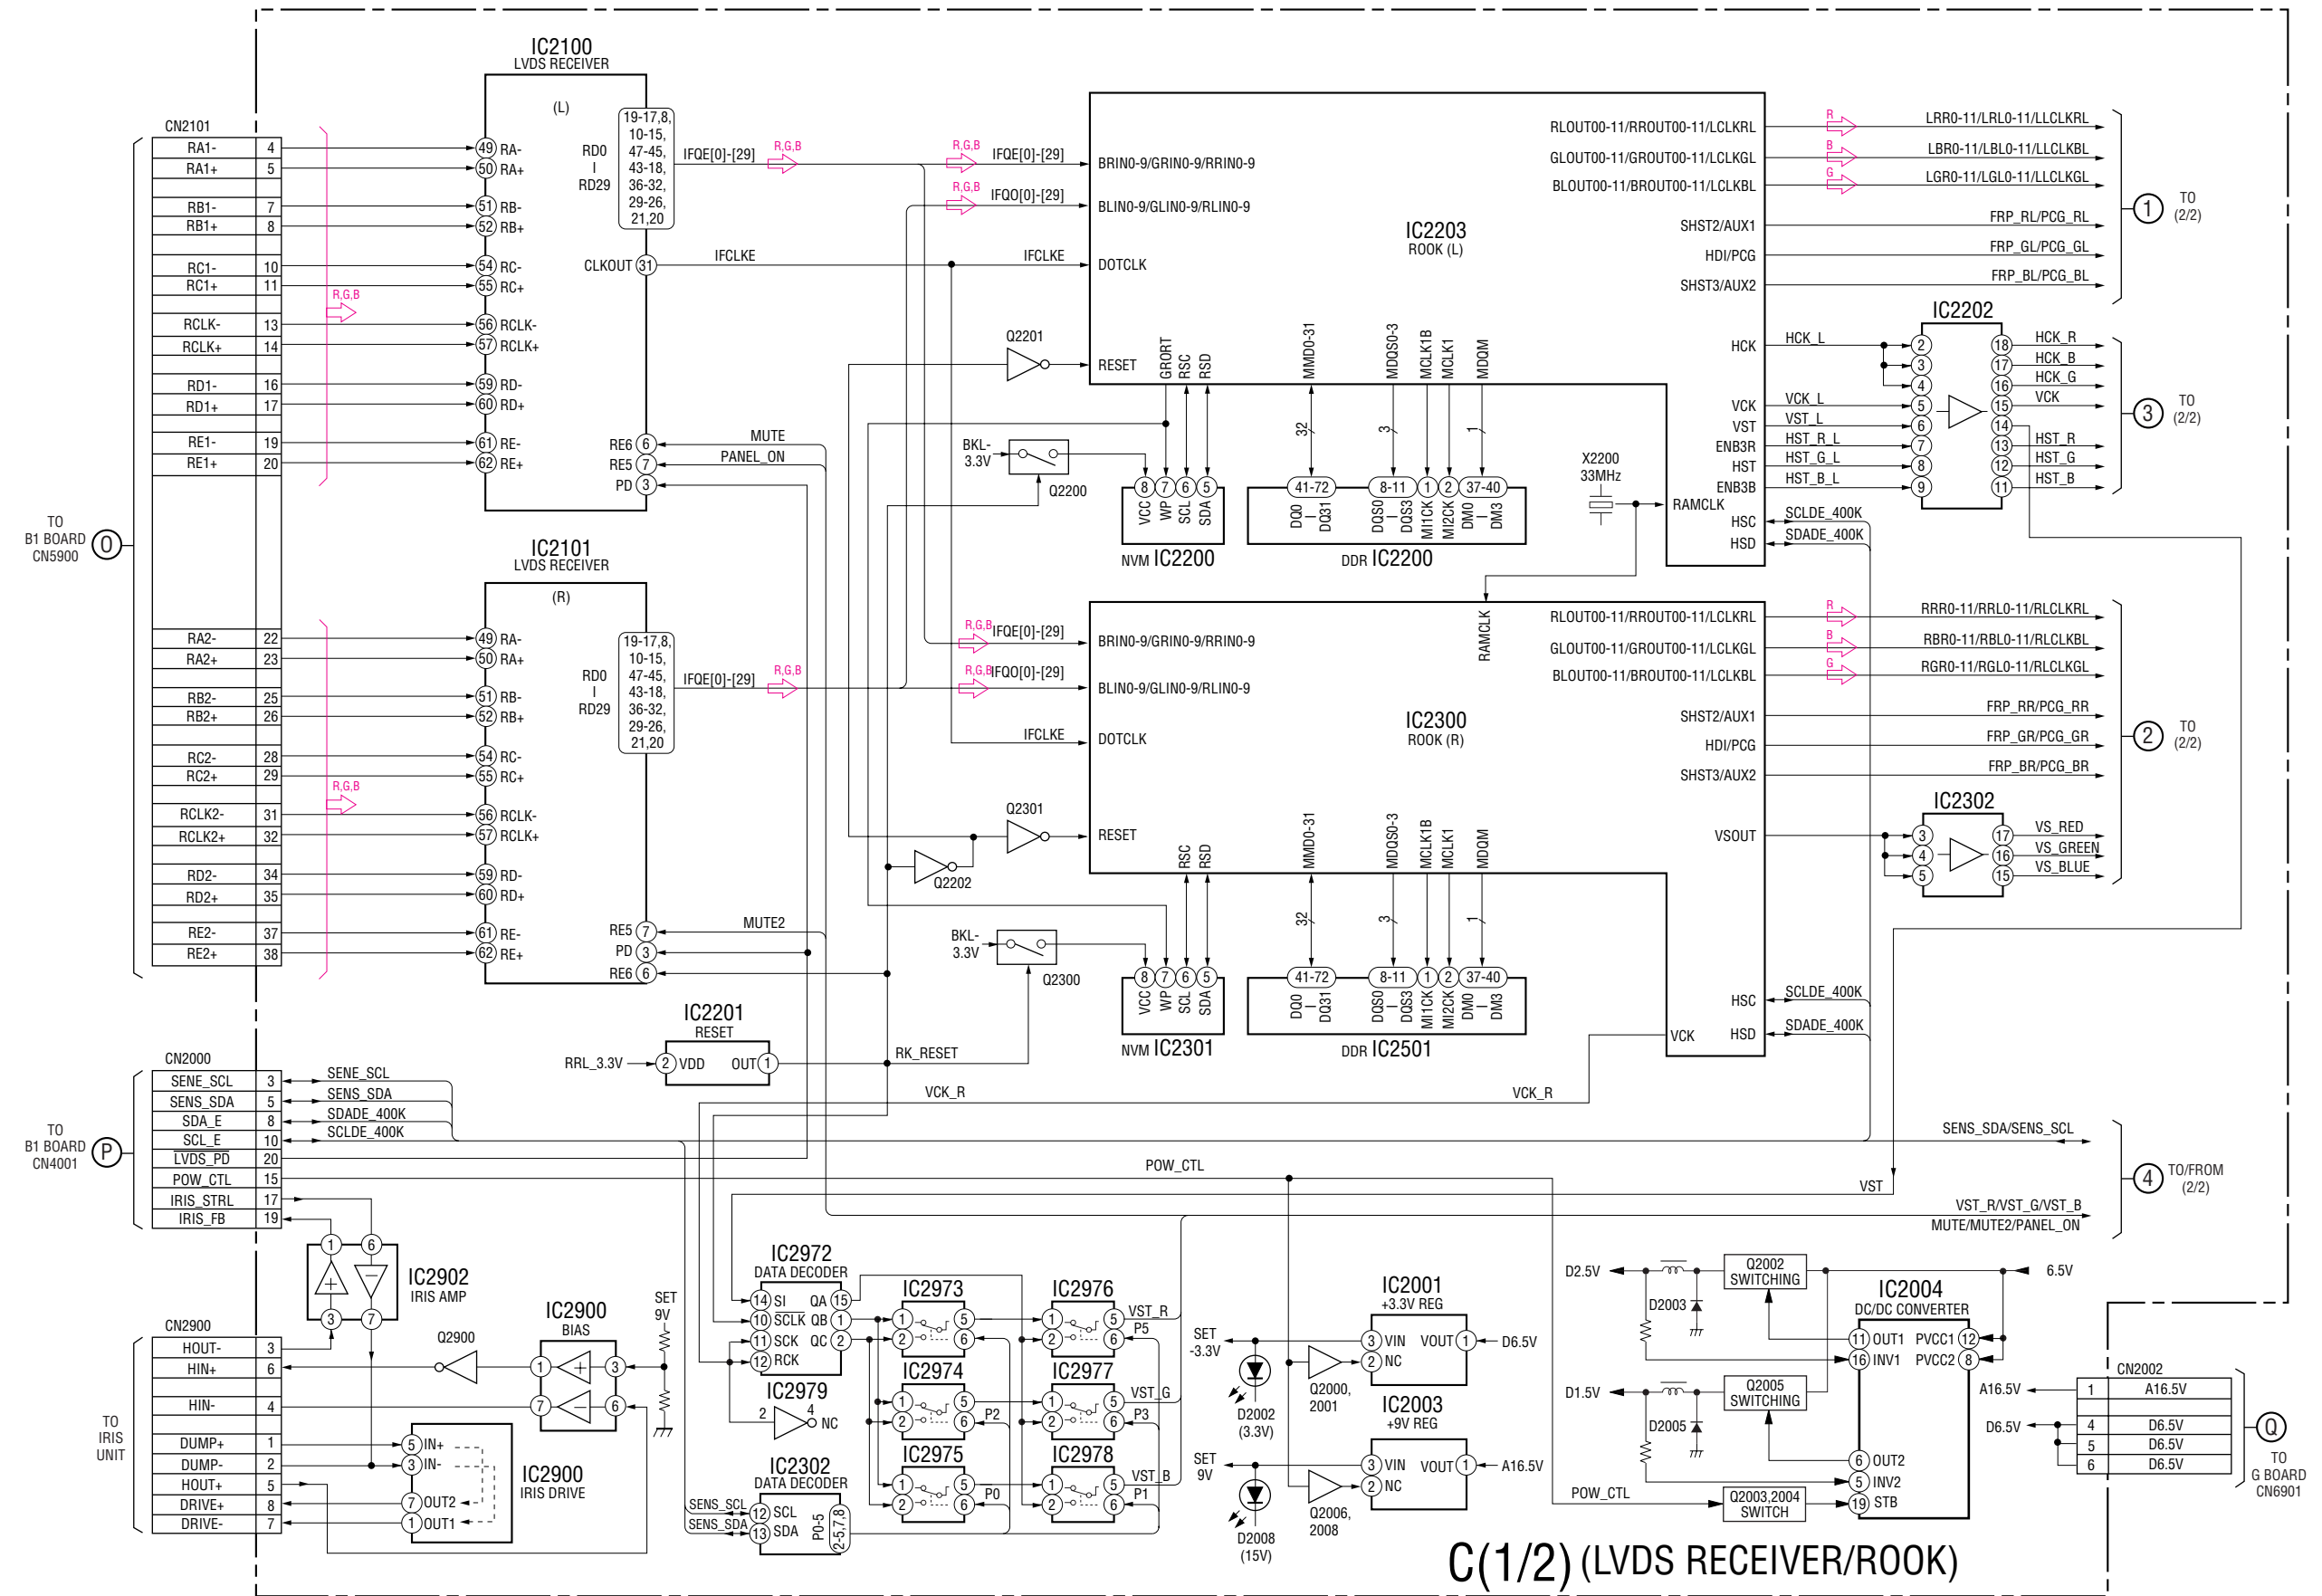


C(1/2) (LVDS RECEIVER/ROOK)

BLOCK DIAGRAM (6)

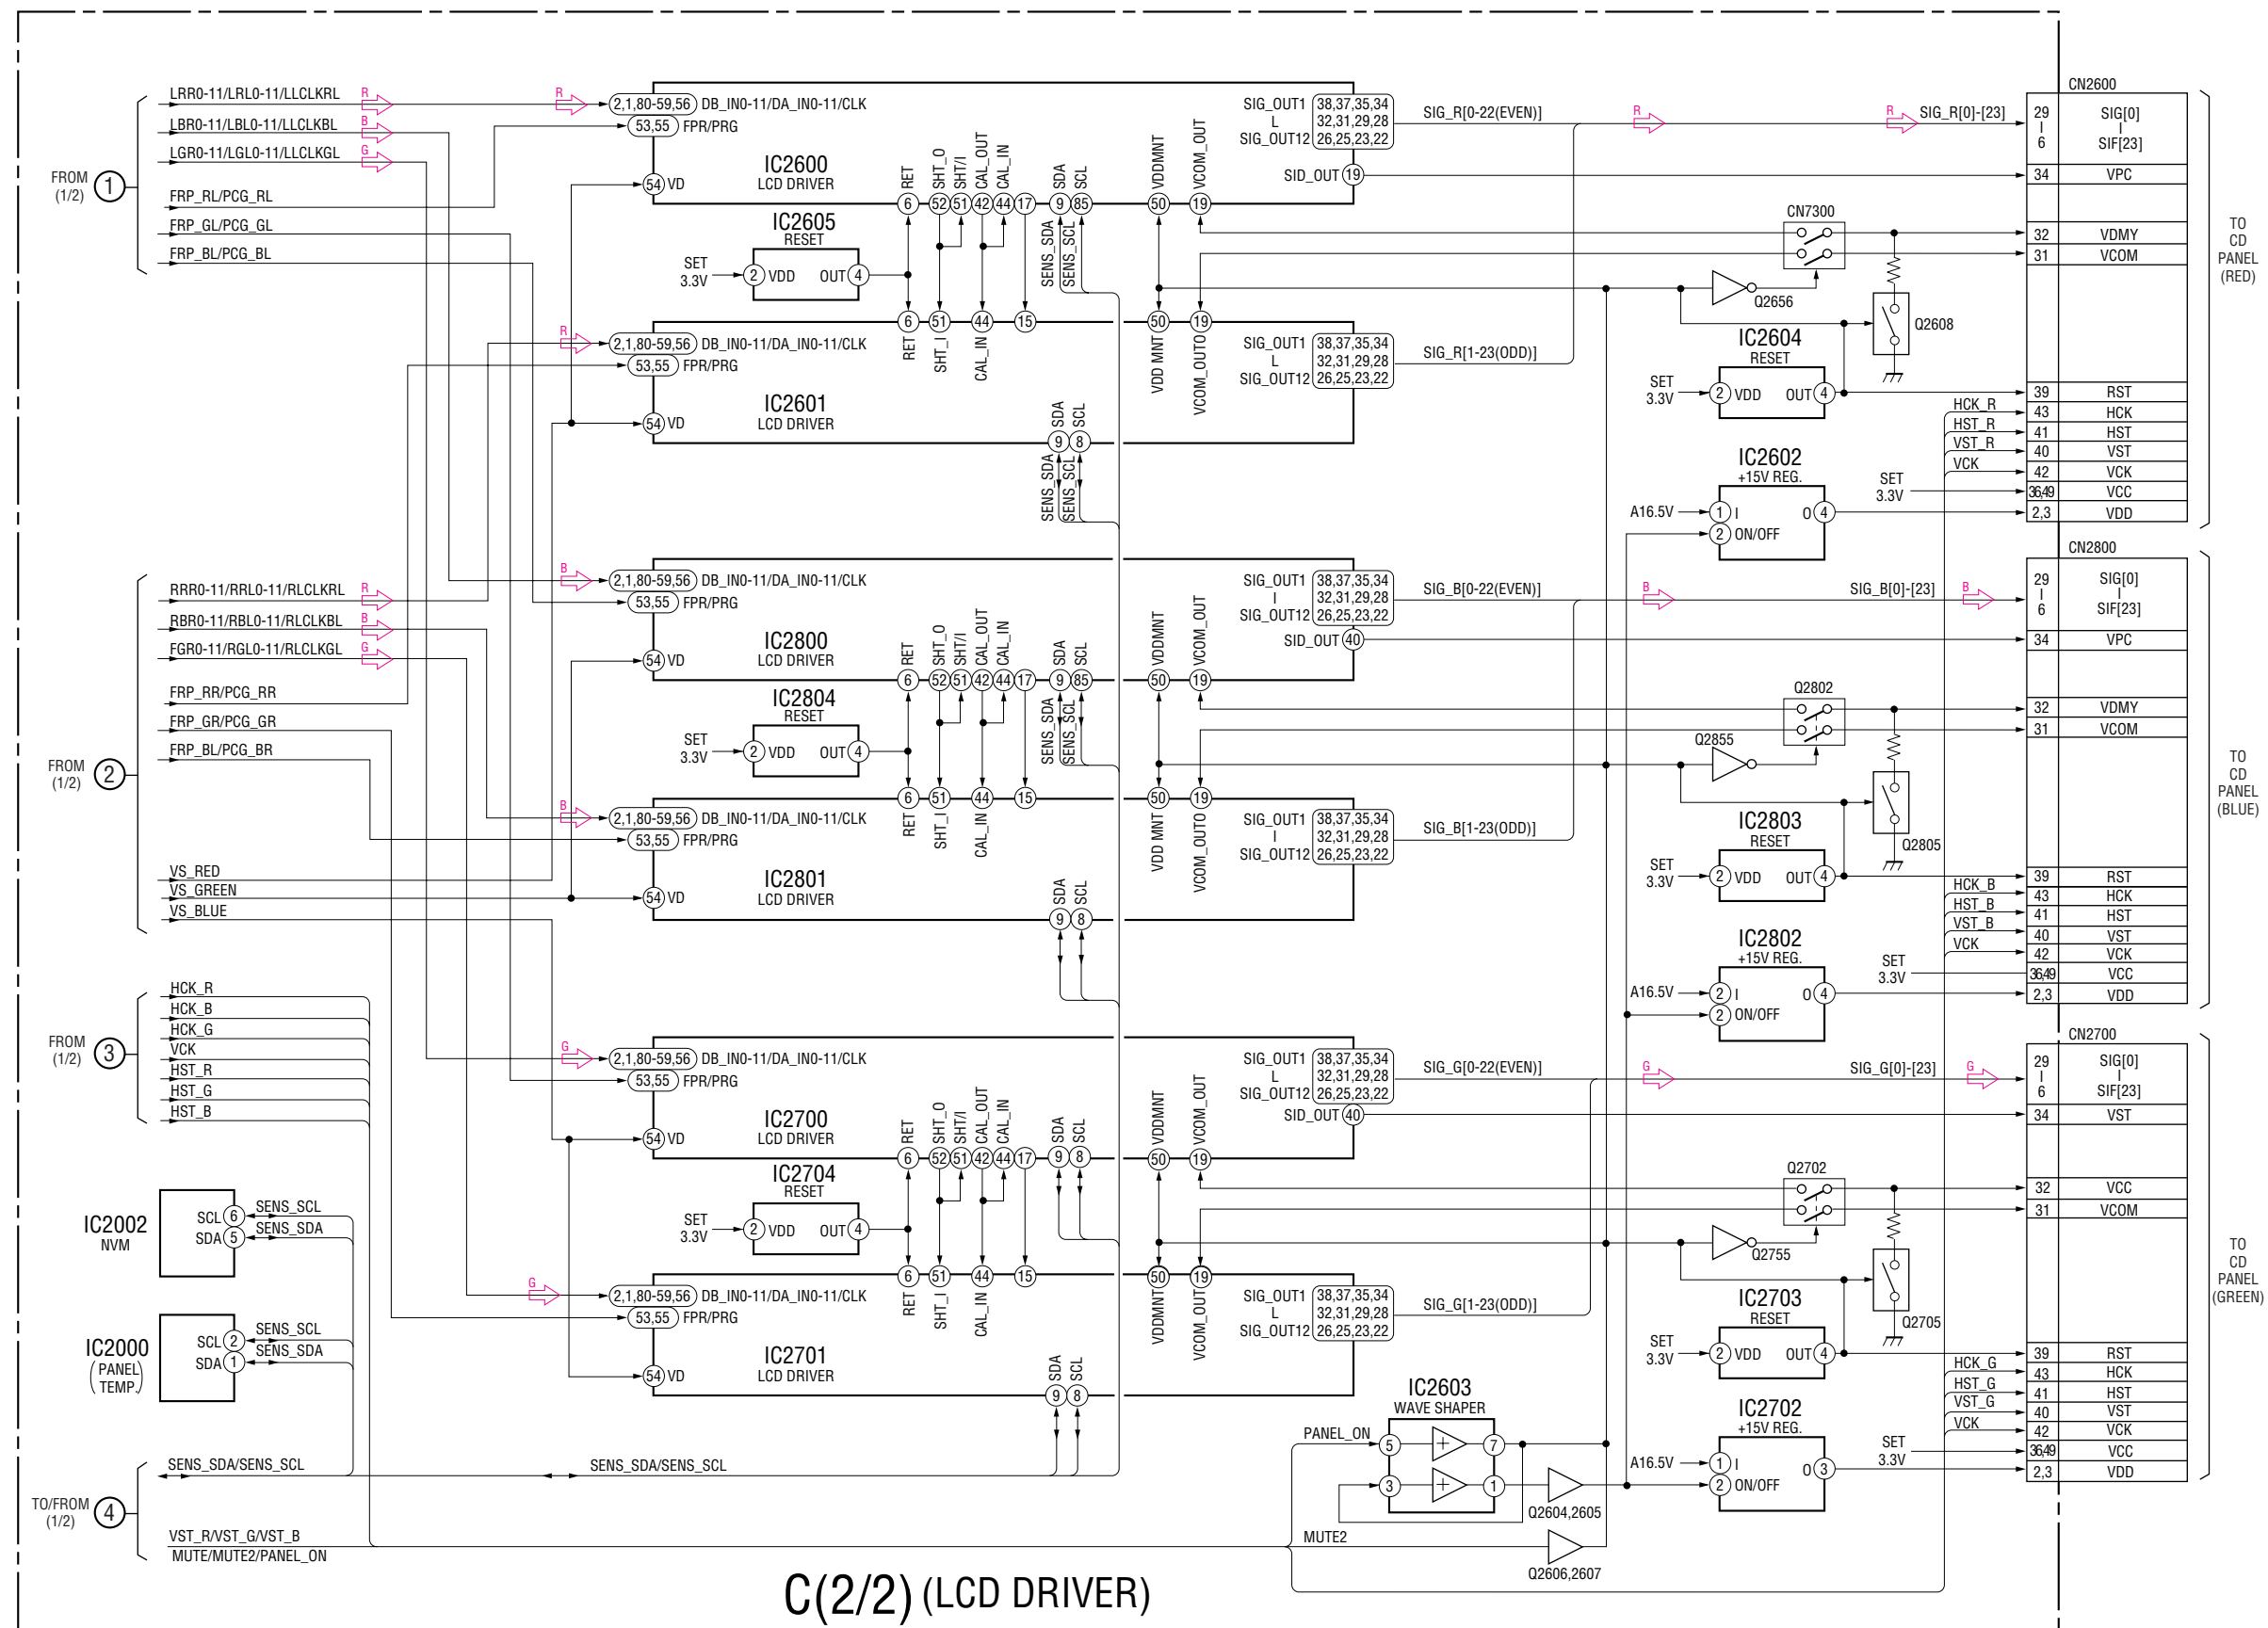










**BLOCK DIAGRAM (7)**

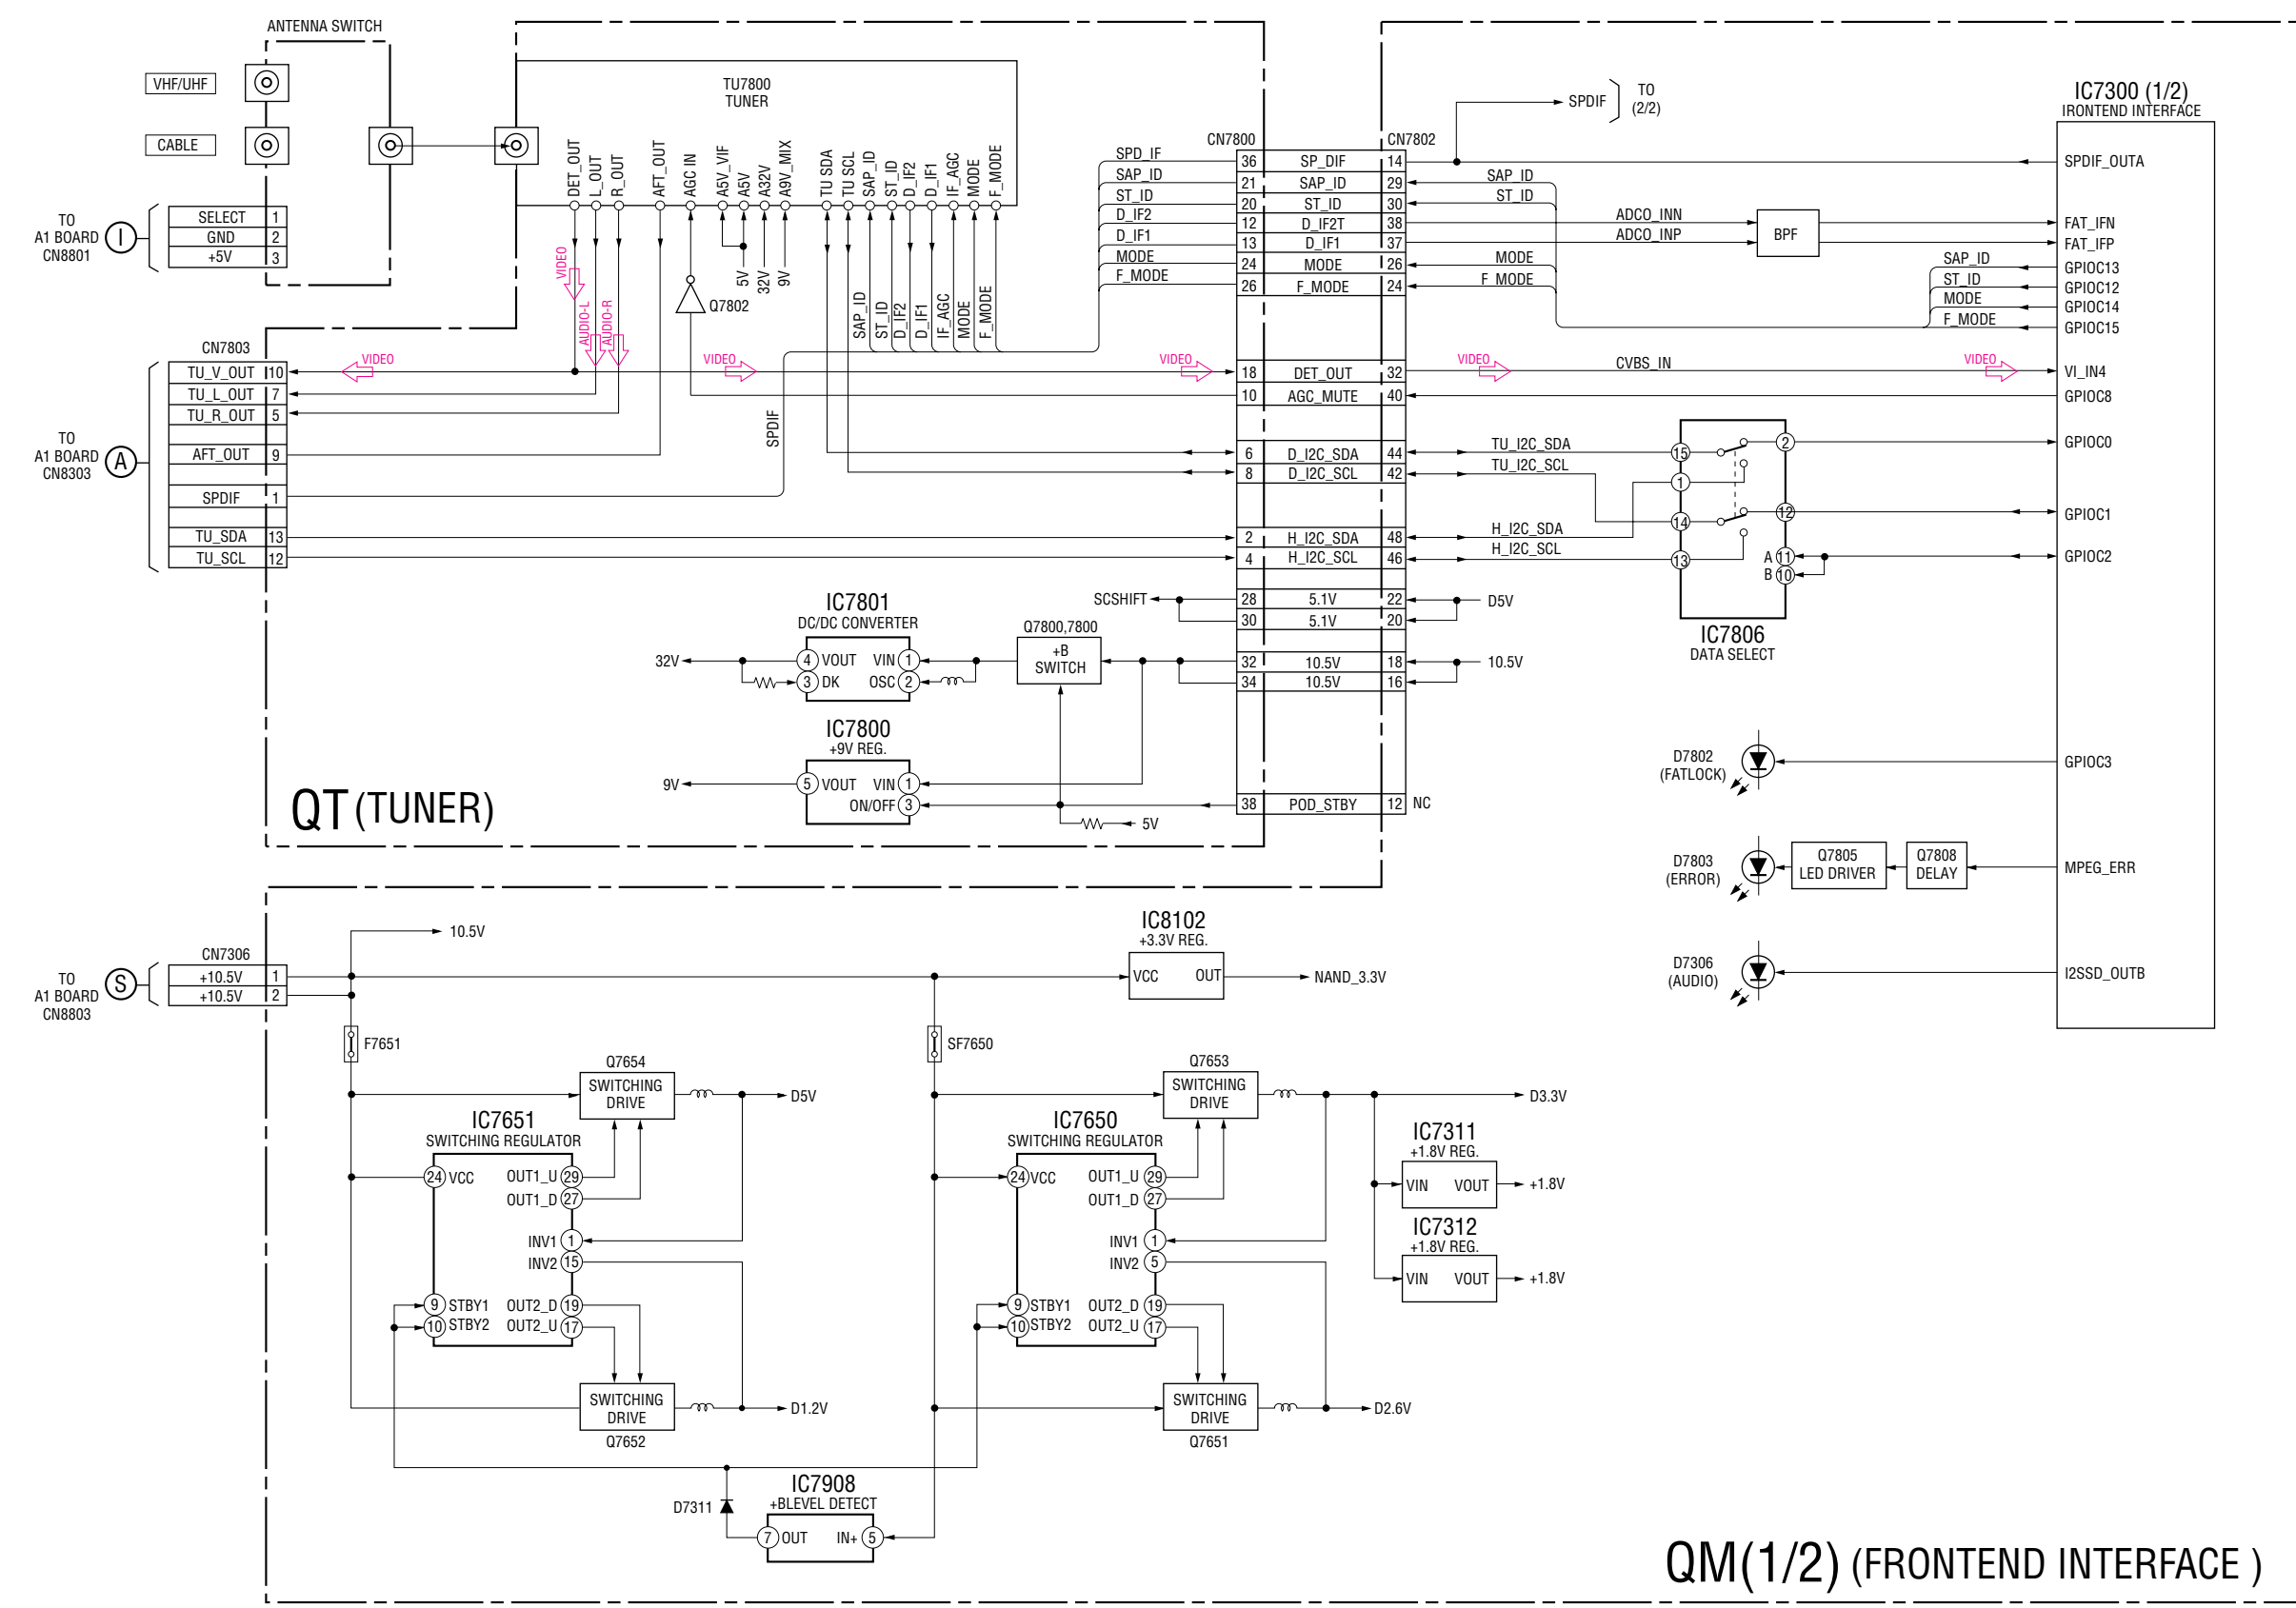


BLOCK DIAGRAM (8)

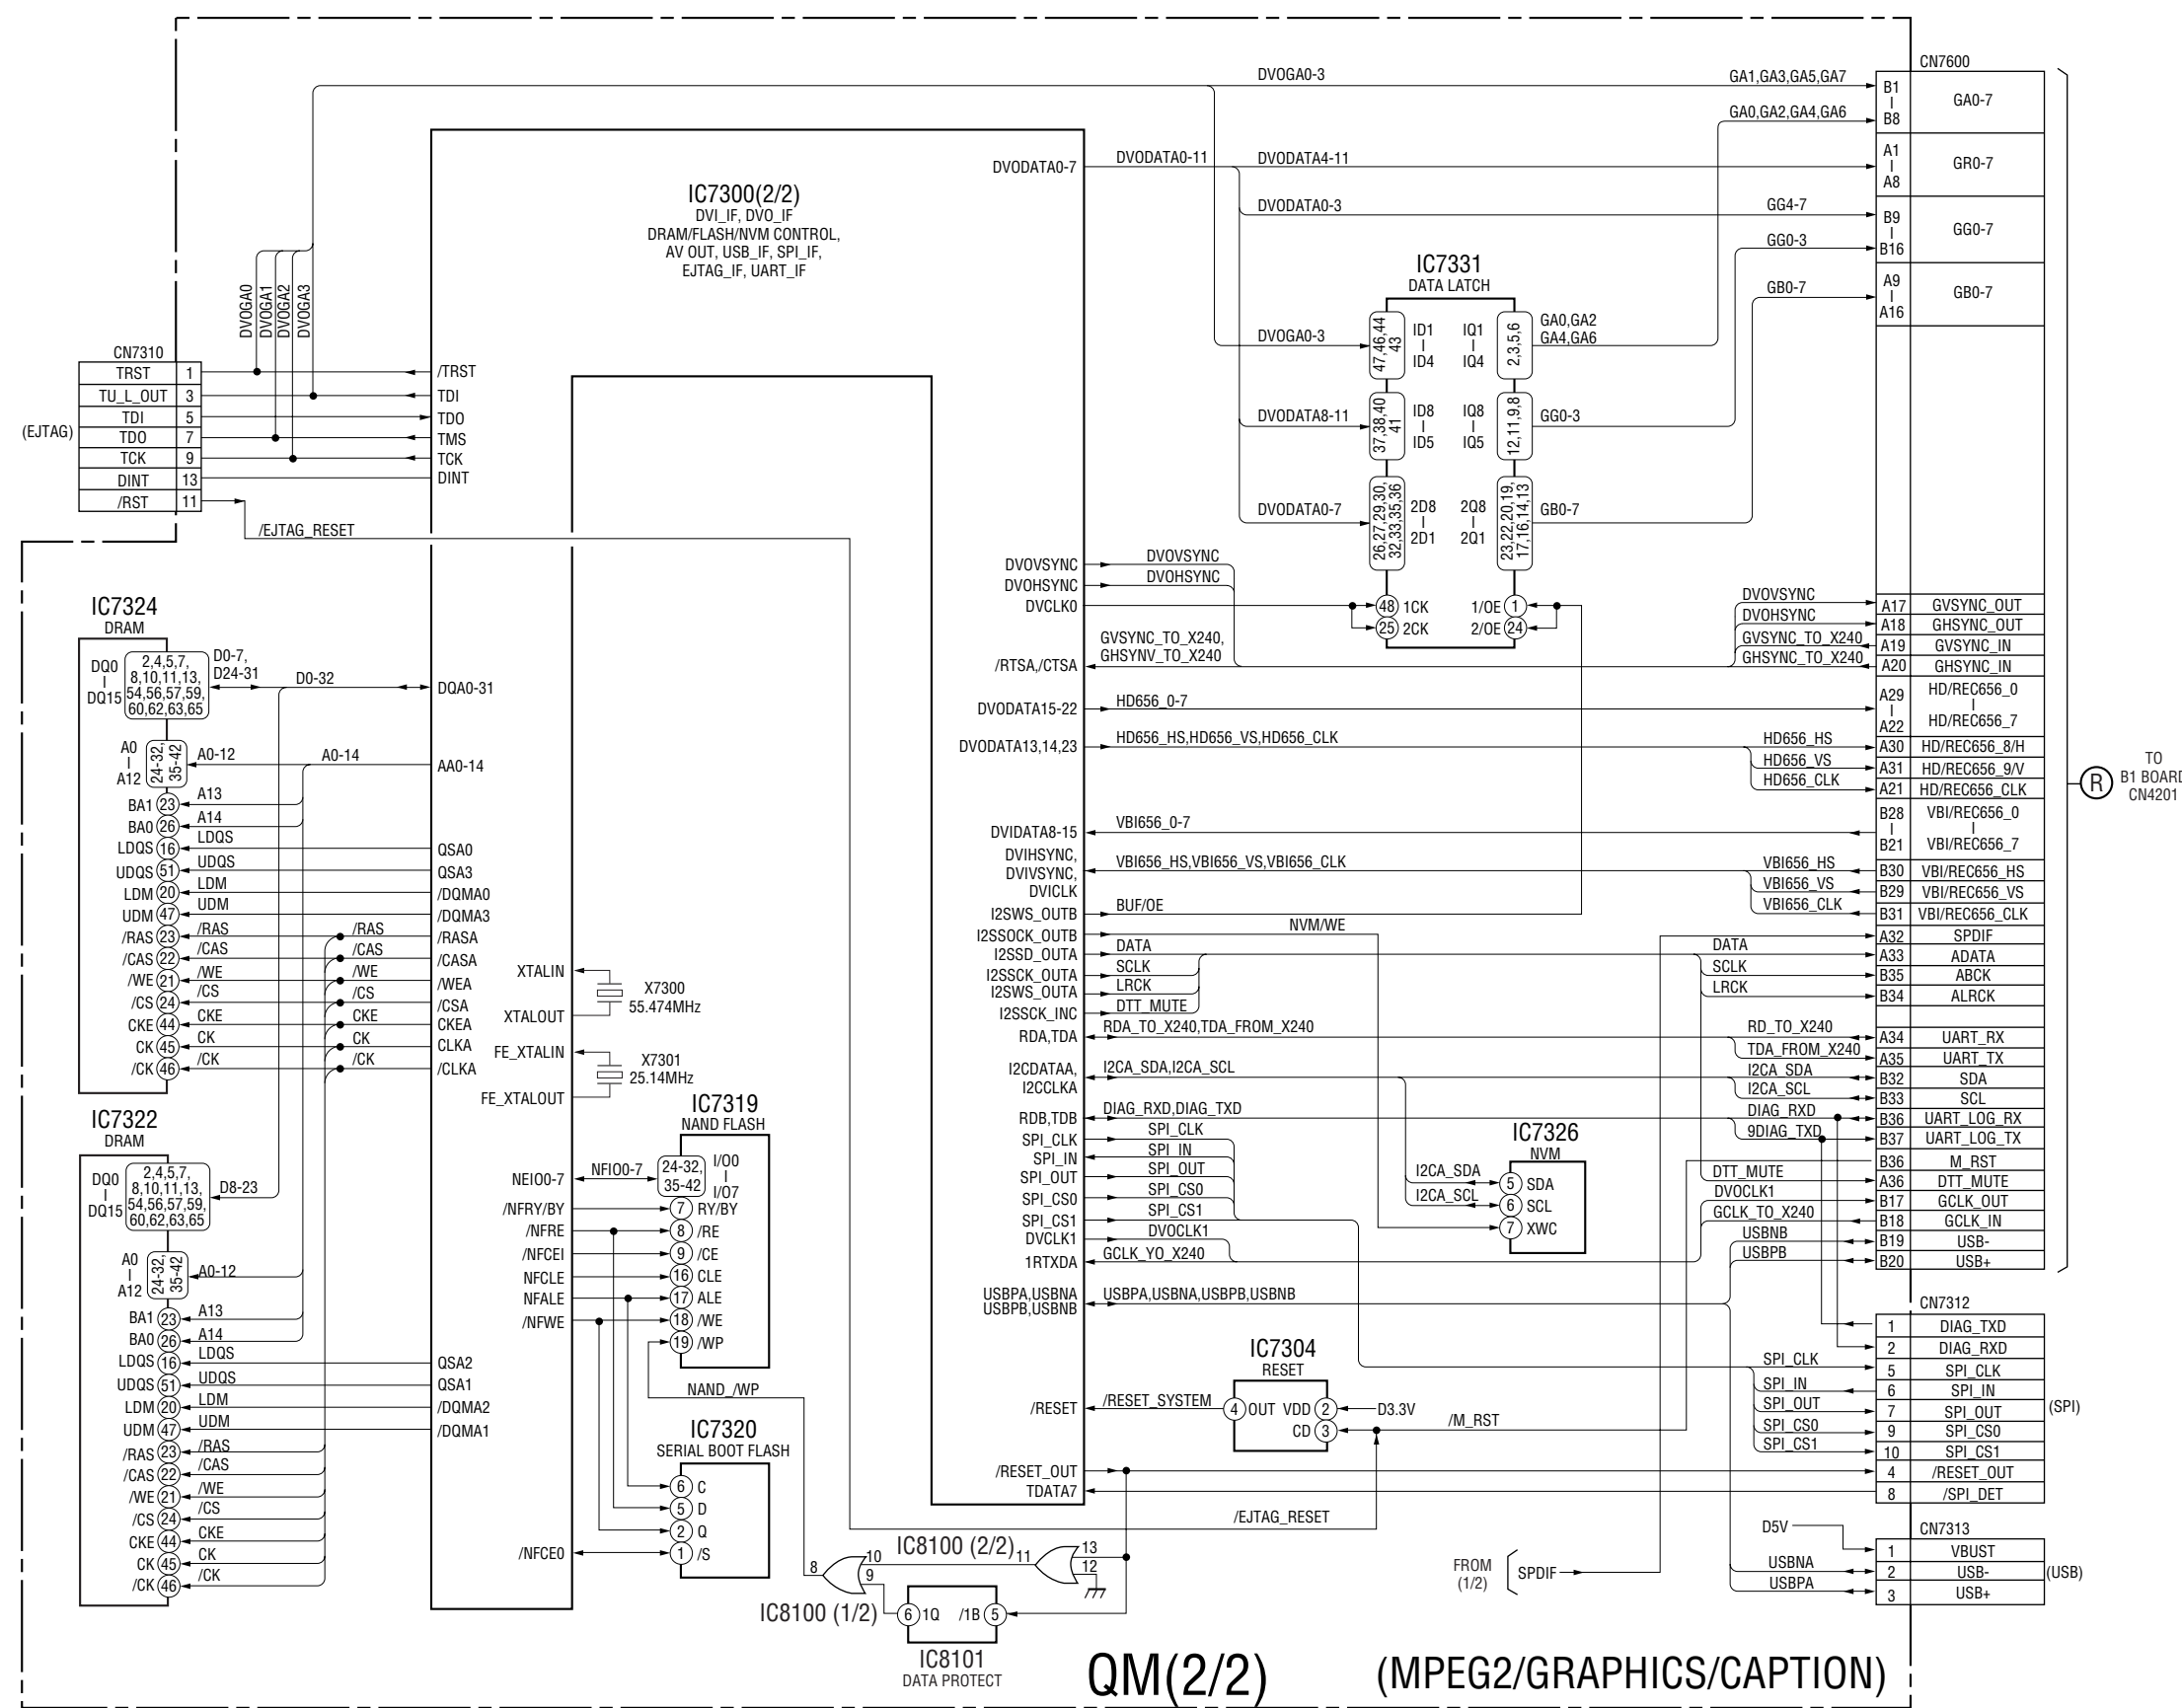


BLOCK DIAGRAM (9)

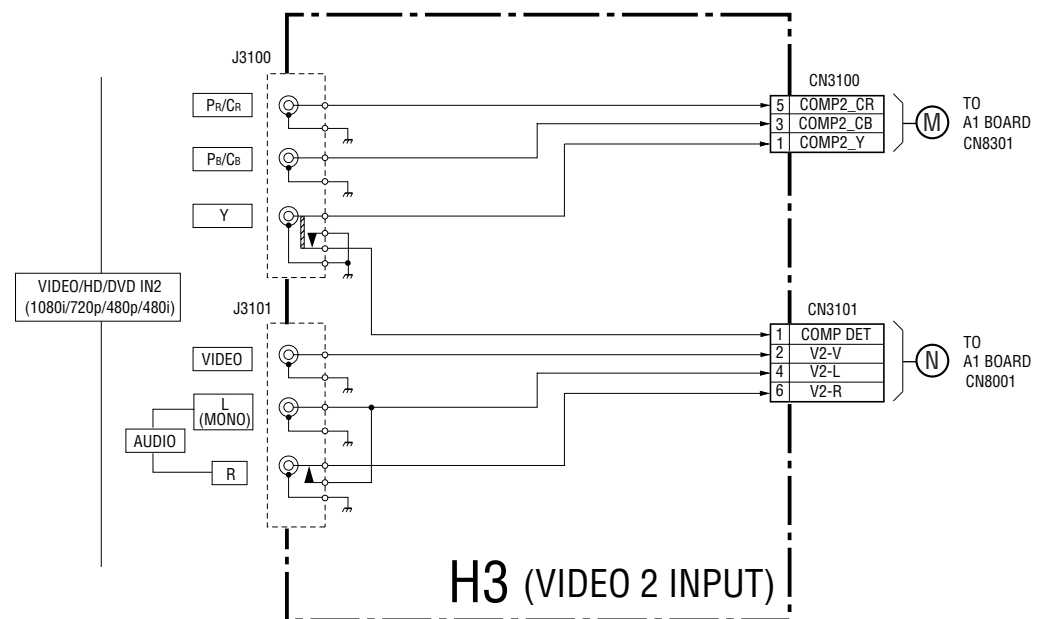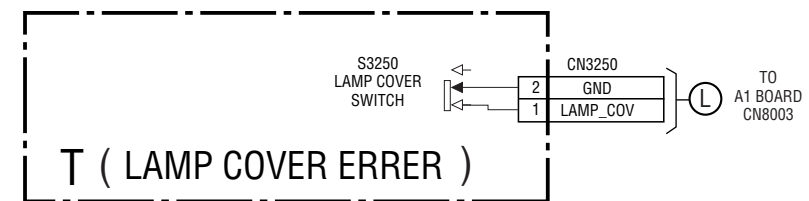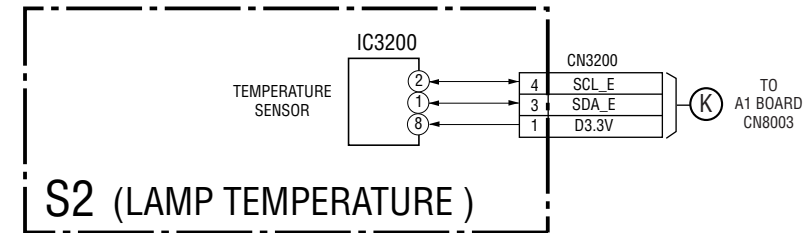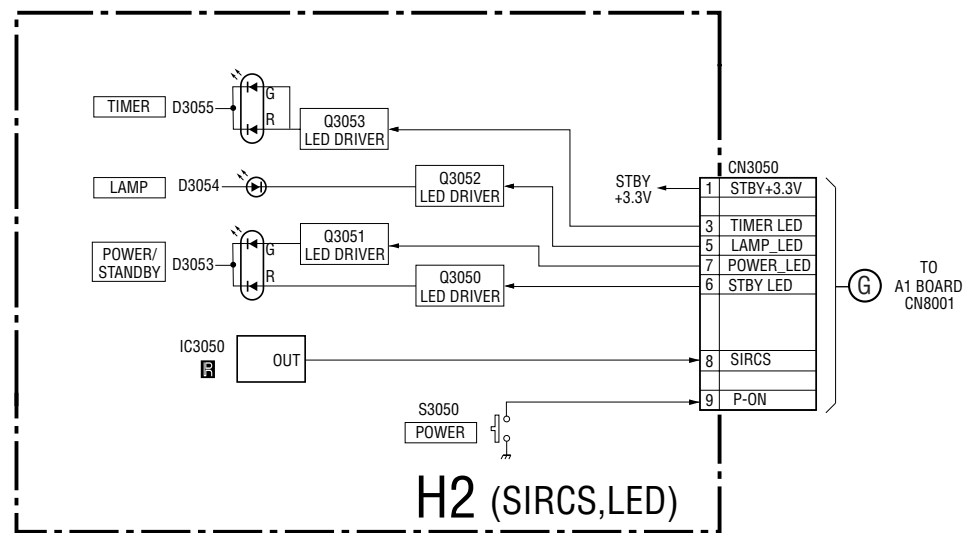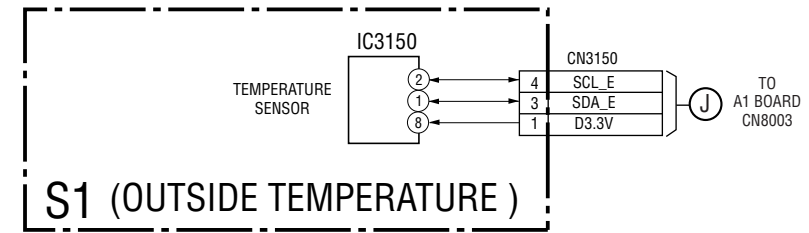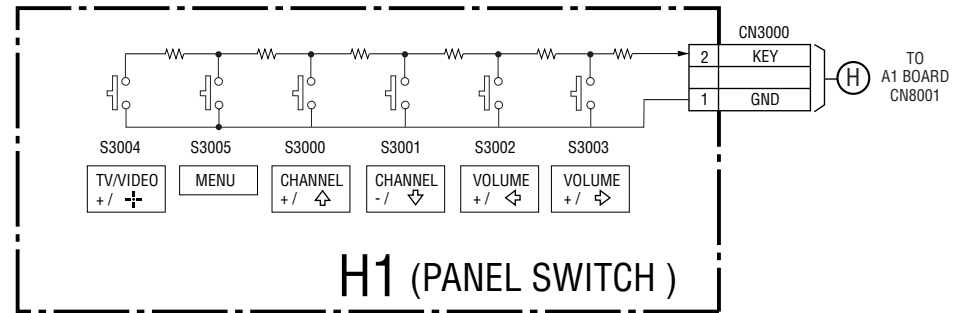


BLOCK DIAGRAM (10)

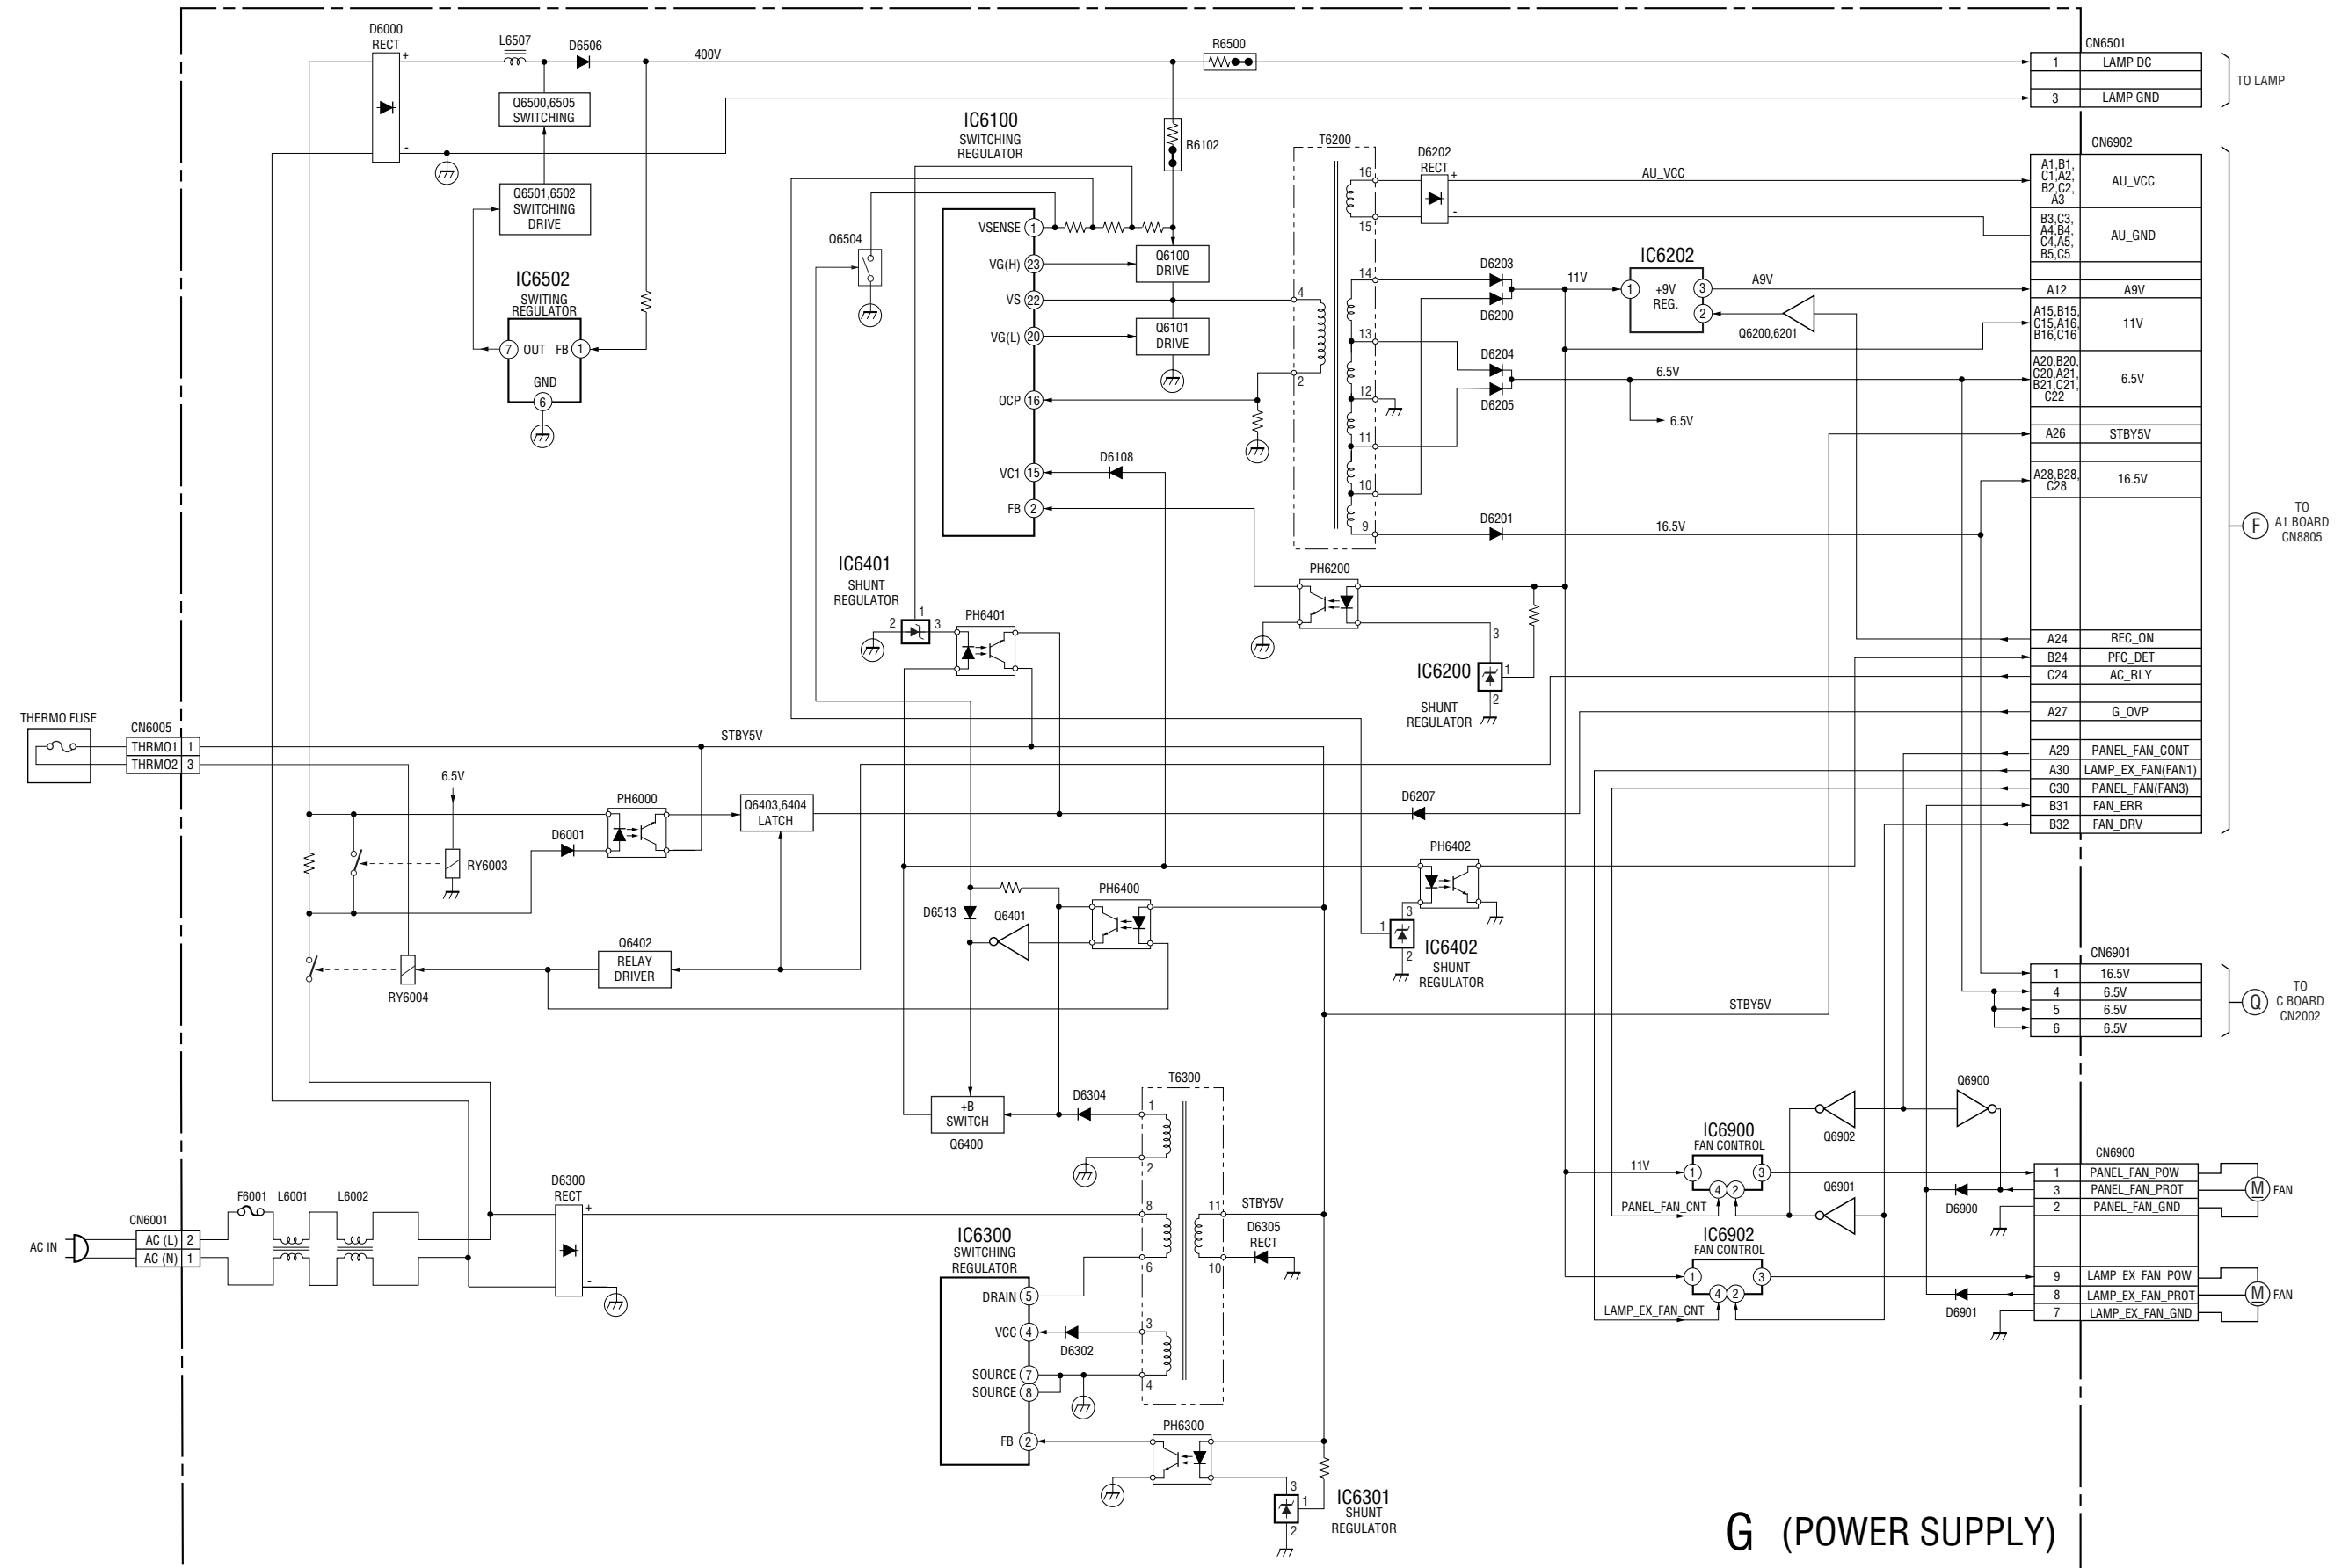

4-2. FRAME SCHEMATIC DIAGRAM

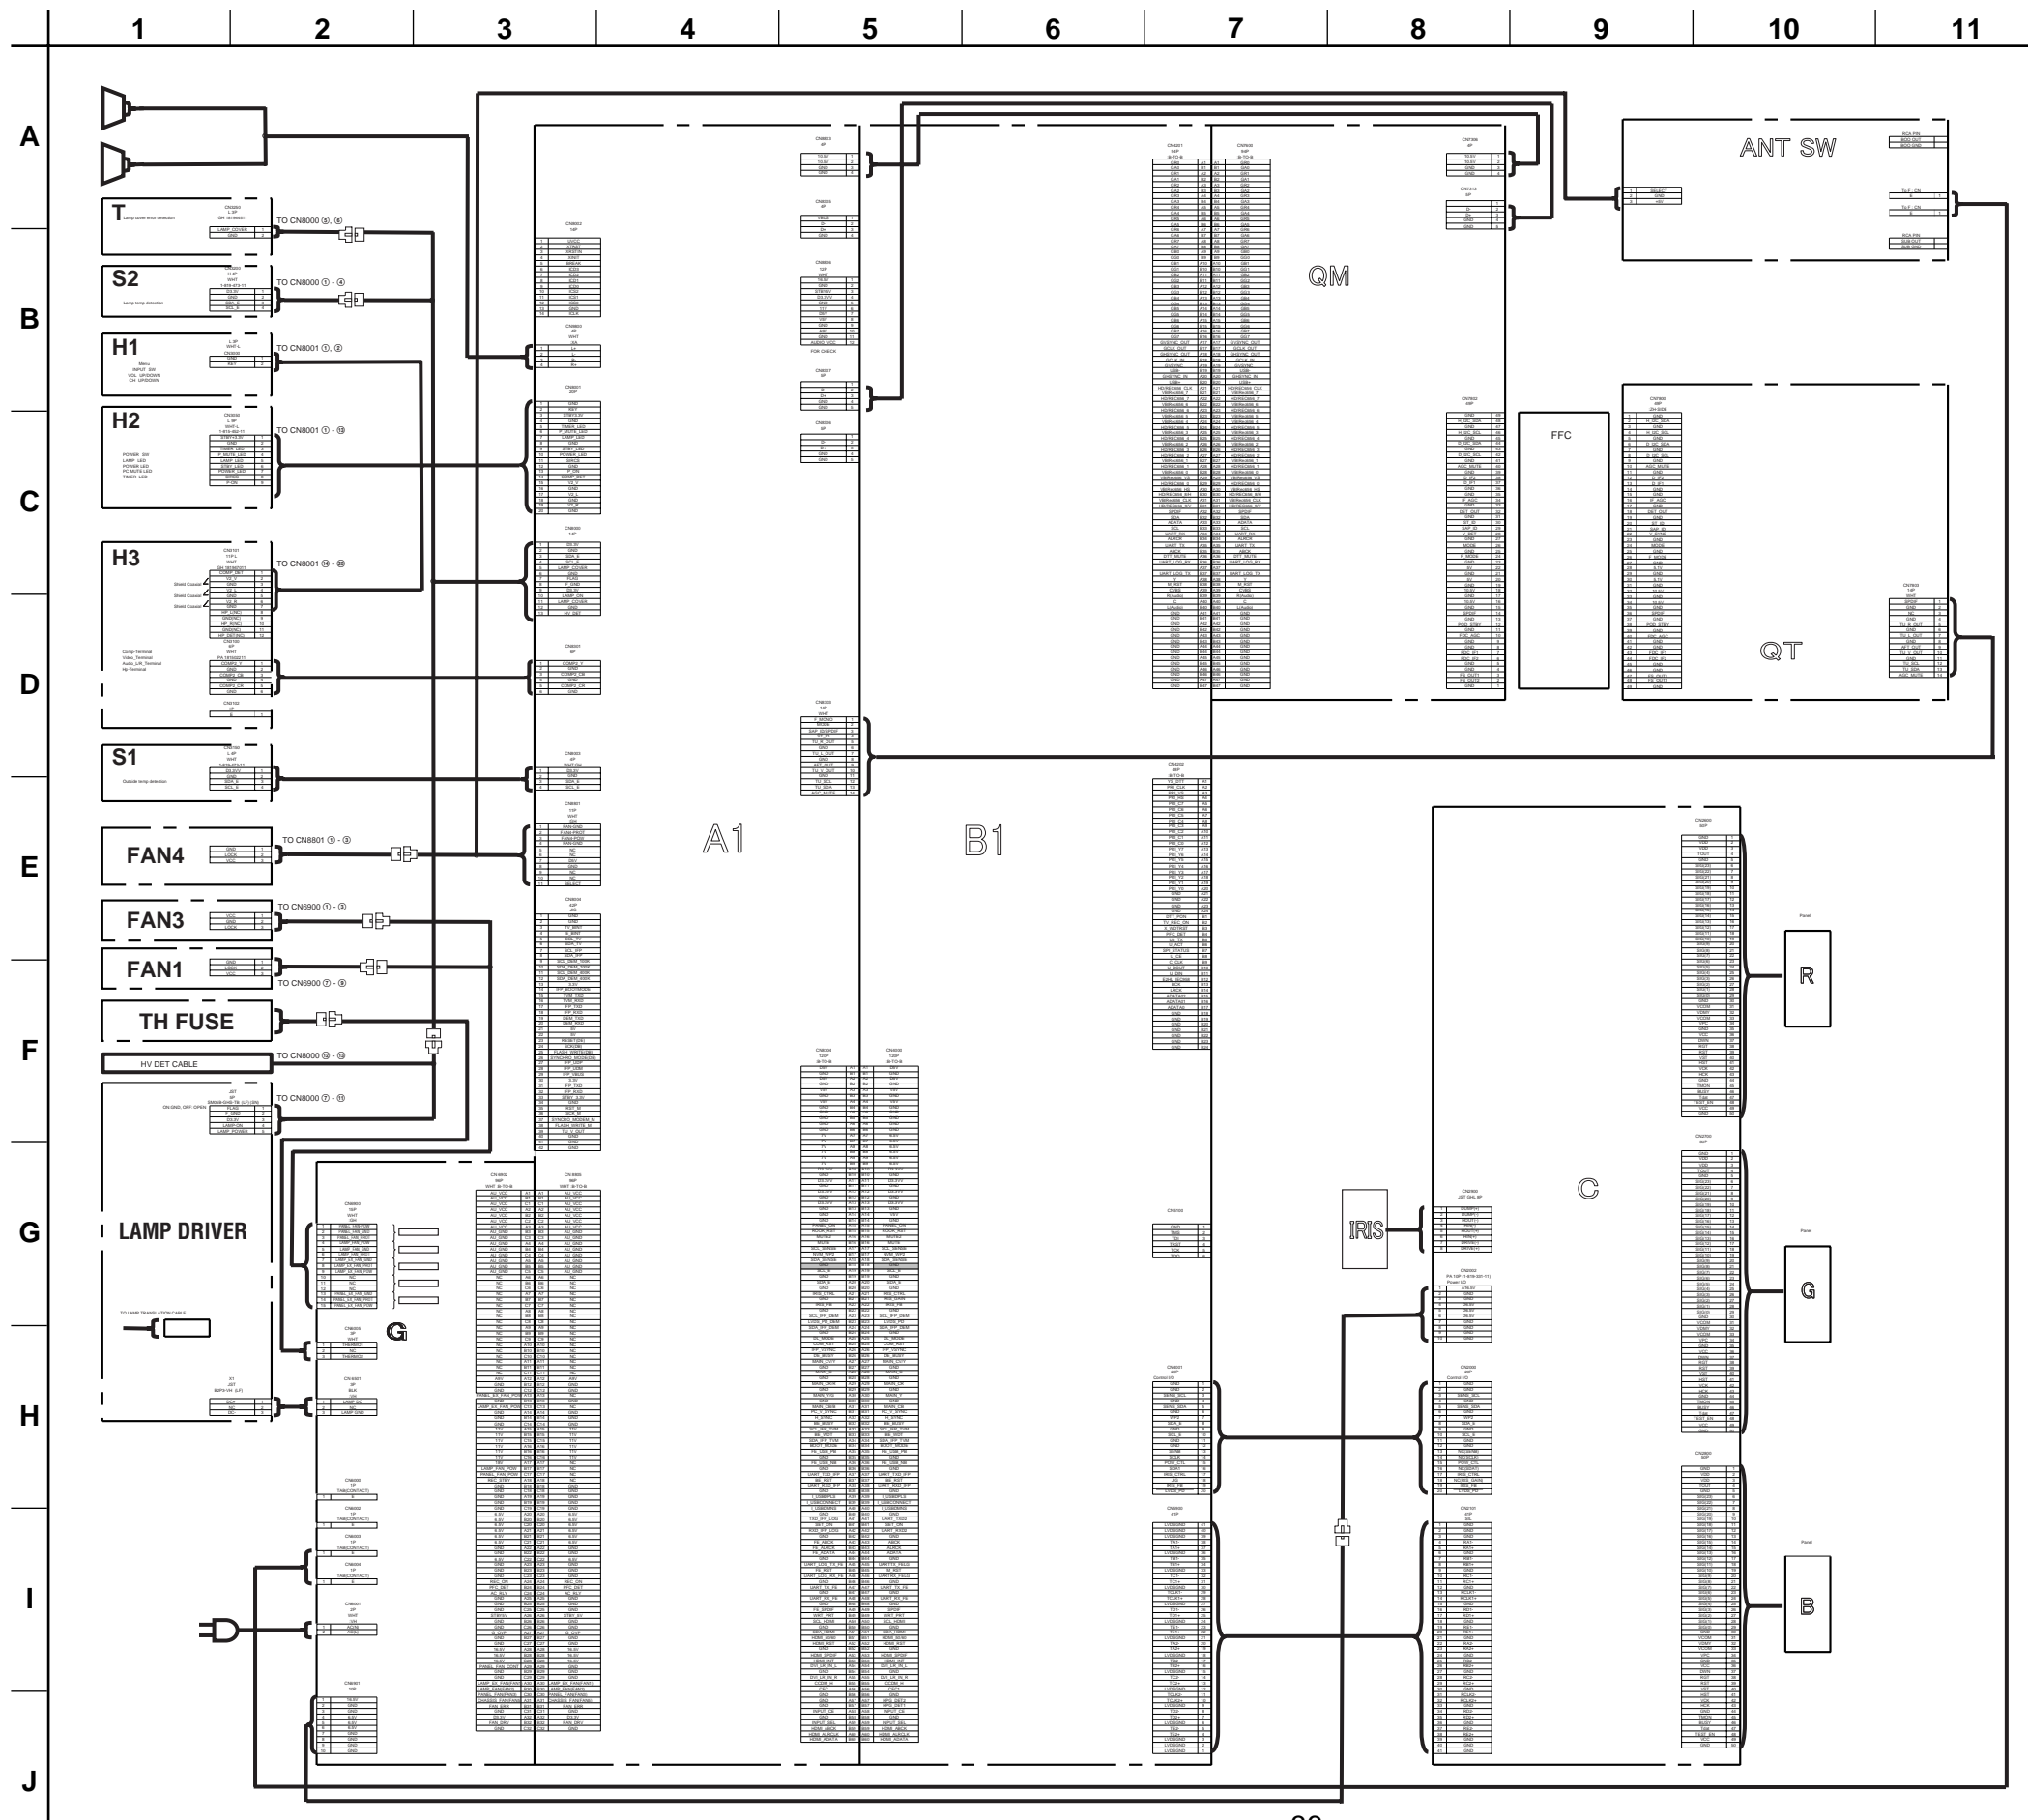

### 4-3. CIRCUIT BOARDS LOCATION

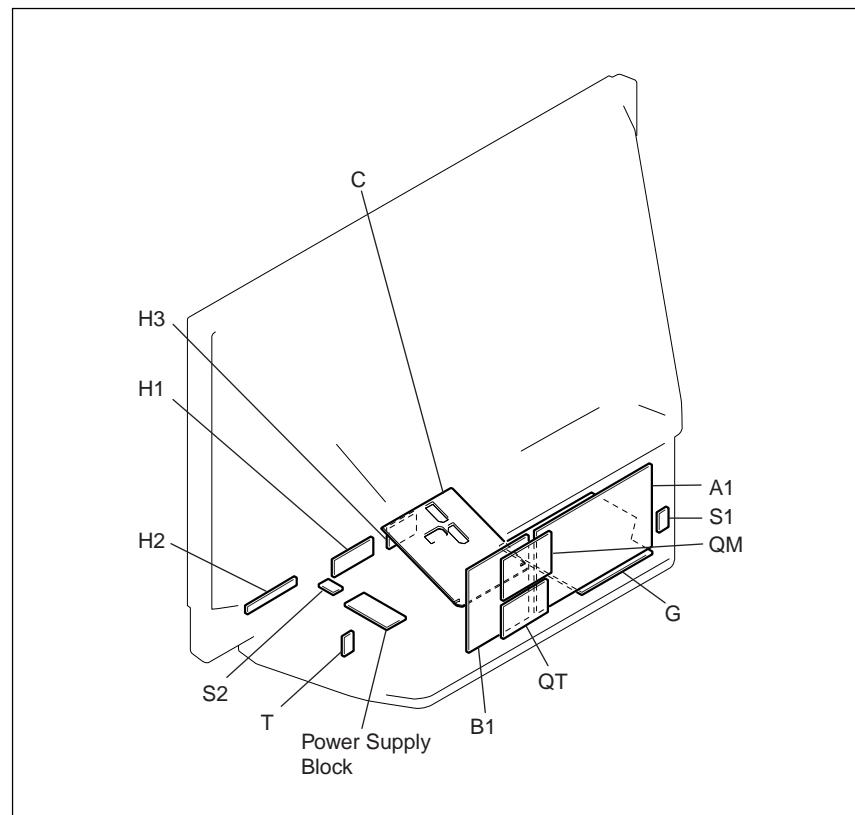

### 4-4. SCHEMATIC DIAGRAMS

**Note:**

- The parts marked “#” on schematic diagrams are not mounted.
- All capacitors are in  $\mu\text{F}$  unless otherwise noted. (pF:  $\mu\text{pF}$ ) Capacitors without voltage indication are all 50 V.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm  
Rating electrical power 1/4 W (CHIP : 1/10 W)

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- $\Delta$  : internal component.
- : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- $\perp$  : earth-ground.
- : earth-chassis.
- All voltages are in V.
- Readings are taken with a 10 M $\Omega$  digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- \* : Can not be measured.
- Circled numbers are waveform references.
- : B + bus.
- : B - bus.
- : Signal path.

**Reference information**

RESISTOR	: RN	METAL FILM
	: RC	SOLID
	: FPRD	NONFLAMMABLE CARBON
	: FUSE	NONFLAMMABLE FUSIBLE
	: RW	NONFLAMMABLE WIREWOUND
	: RS	NONFLAMMABLE METAL OXIDE
	: RB	NONFLAMMABLE CEMENT
COIL	: LF-8L	MICRO INDUCTOR
CAPACITOR	: TA	TANTALUM
	: PS	STYROL
	: PP	POLYPROPYLENE
	: PT	MYLAR
	: MPS	METALIZED POLYESTER
	: MPP	METALIZED POLYPROPYLENE
	: ALB	BIPOLAR
	: ALT	HIGH TEMPERATURE
	: ALR	HIGH RIPPLE

**Note: The components identified by shading and mark  $\Delta$  are critical for safety. Replace only with part number specified.**

**Note: Les composants identifiés par une trame et une marque  $\Delta$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.**

The components identified by mark  $\Delta$  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

Les composants identifiés par la marque  $\Delta$  contiennent des informations confidentielles. Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et/ou réparé.


### Terminal name of semiconductors in silk screen printed circuit (\*)

Device	Printed symbol	Terminal name	Circuit
① Transistor		Collector Base Emitter	
② Transistor		Collector Base Emitter	
③ Diode		Cathode Anode	
④ Diode		Cathode Anode (NC)	
⑤ Diode		Cathode Anode (NC)	
⑥ Diode		Common Anode Cathode	
⑦ Diode		Common Anode Cathode	
⑧ Diode		Common Anode Anode	
⑨ Diode		Common Anode Anode	
⑩ Diode		Common Cathode Cathode	
⑪ Diode		Common Cathode Cathode	
⑫ Diode		Anode Cathode Anode Cathode	
⑬ Transistor (FET)		Drain Source Gate	
⑭ Transistor (FET)		Drain Source Gate	
⑮ Transistor (FET)		Source Drain Gate	
⑯ Transistor		Emitter Collector Base	
⑰ Transistor		C2/B1/E1 E2/B2/C1	
⑱ Transistor		C1/B2/E2 E1/B1/C2	
⑲ Transistor		C1 B2 E2 E1 B1 C2	
⑳ Transistor		C1 B2 E2 E1 B1 C2	
㉑ Transistor		E2 B1 E1 C2 C1(B2)	
㉒ Transistor		(B2) B1 E1 E2 C1 C2	
㉓ Transistor		(B2) E2 E1 B1 C2 C1	
-	Discrete semiconductor		


(Chip semiconductors that are not actually used are included.)

Ver.1.5

(1) Schematic Diagram of A1 (1/6) Board

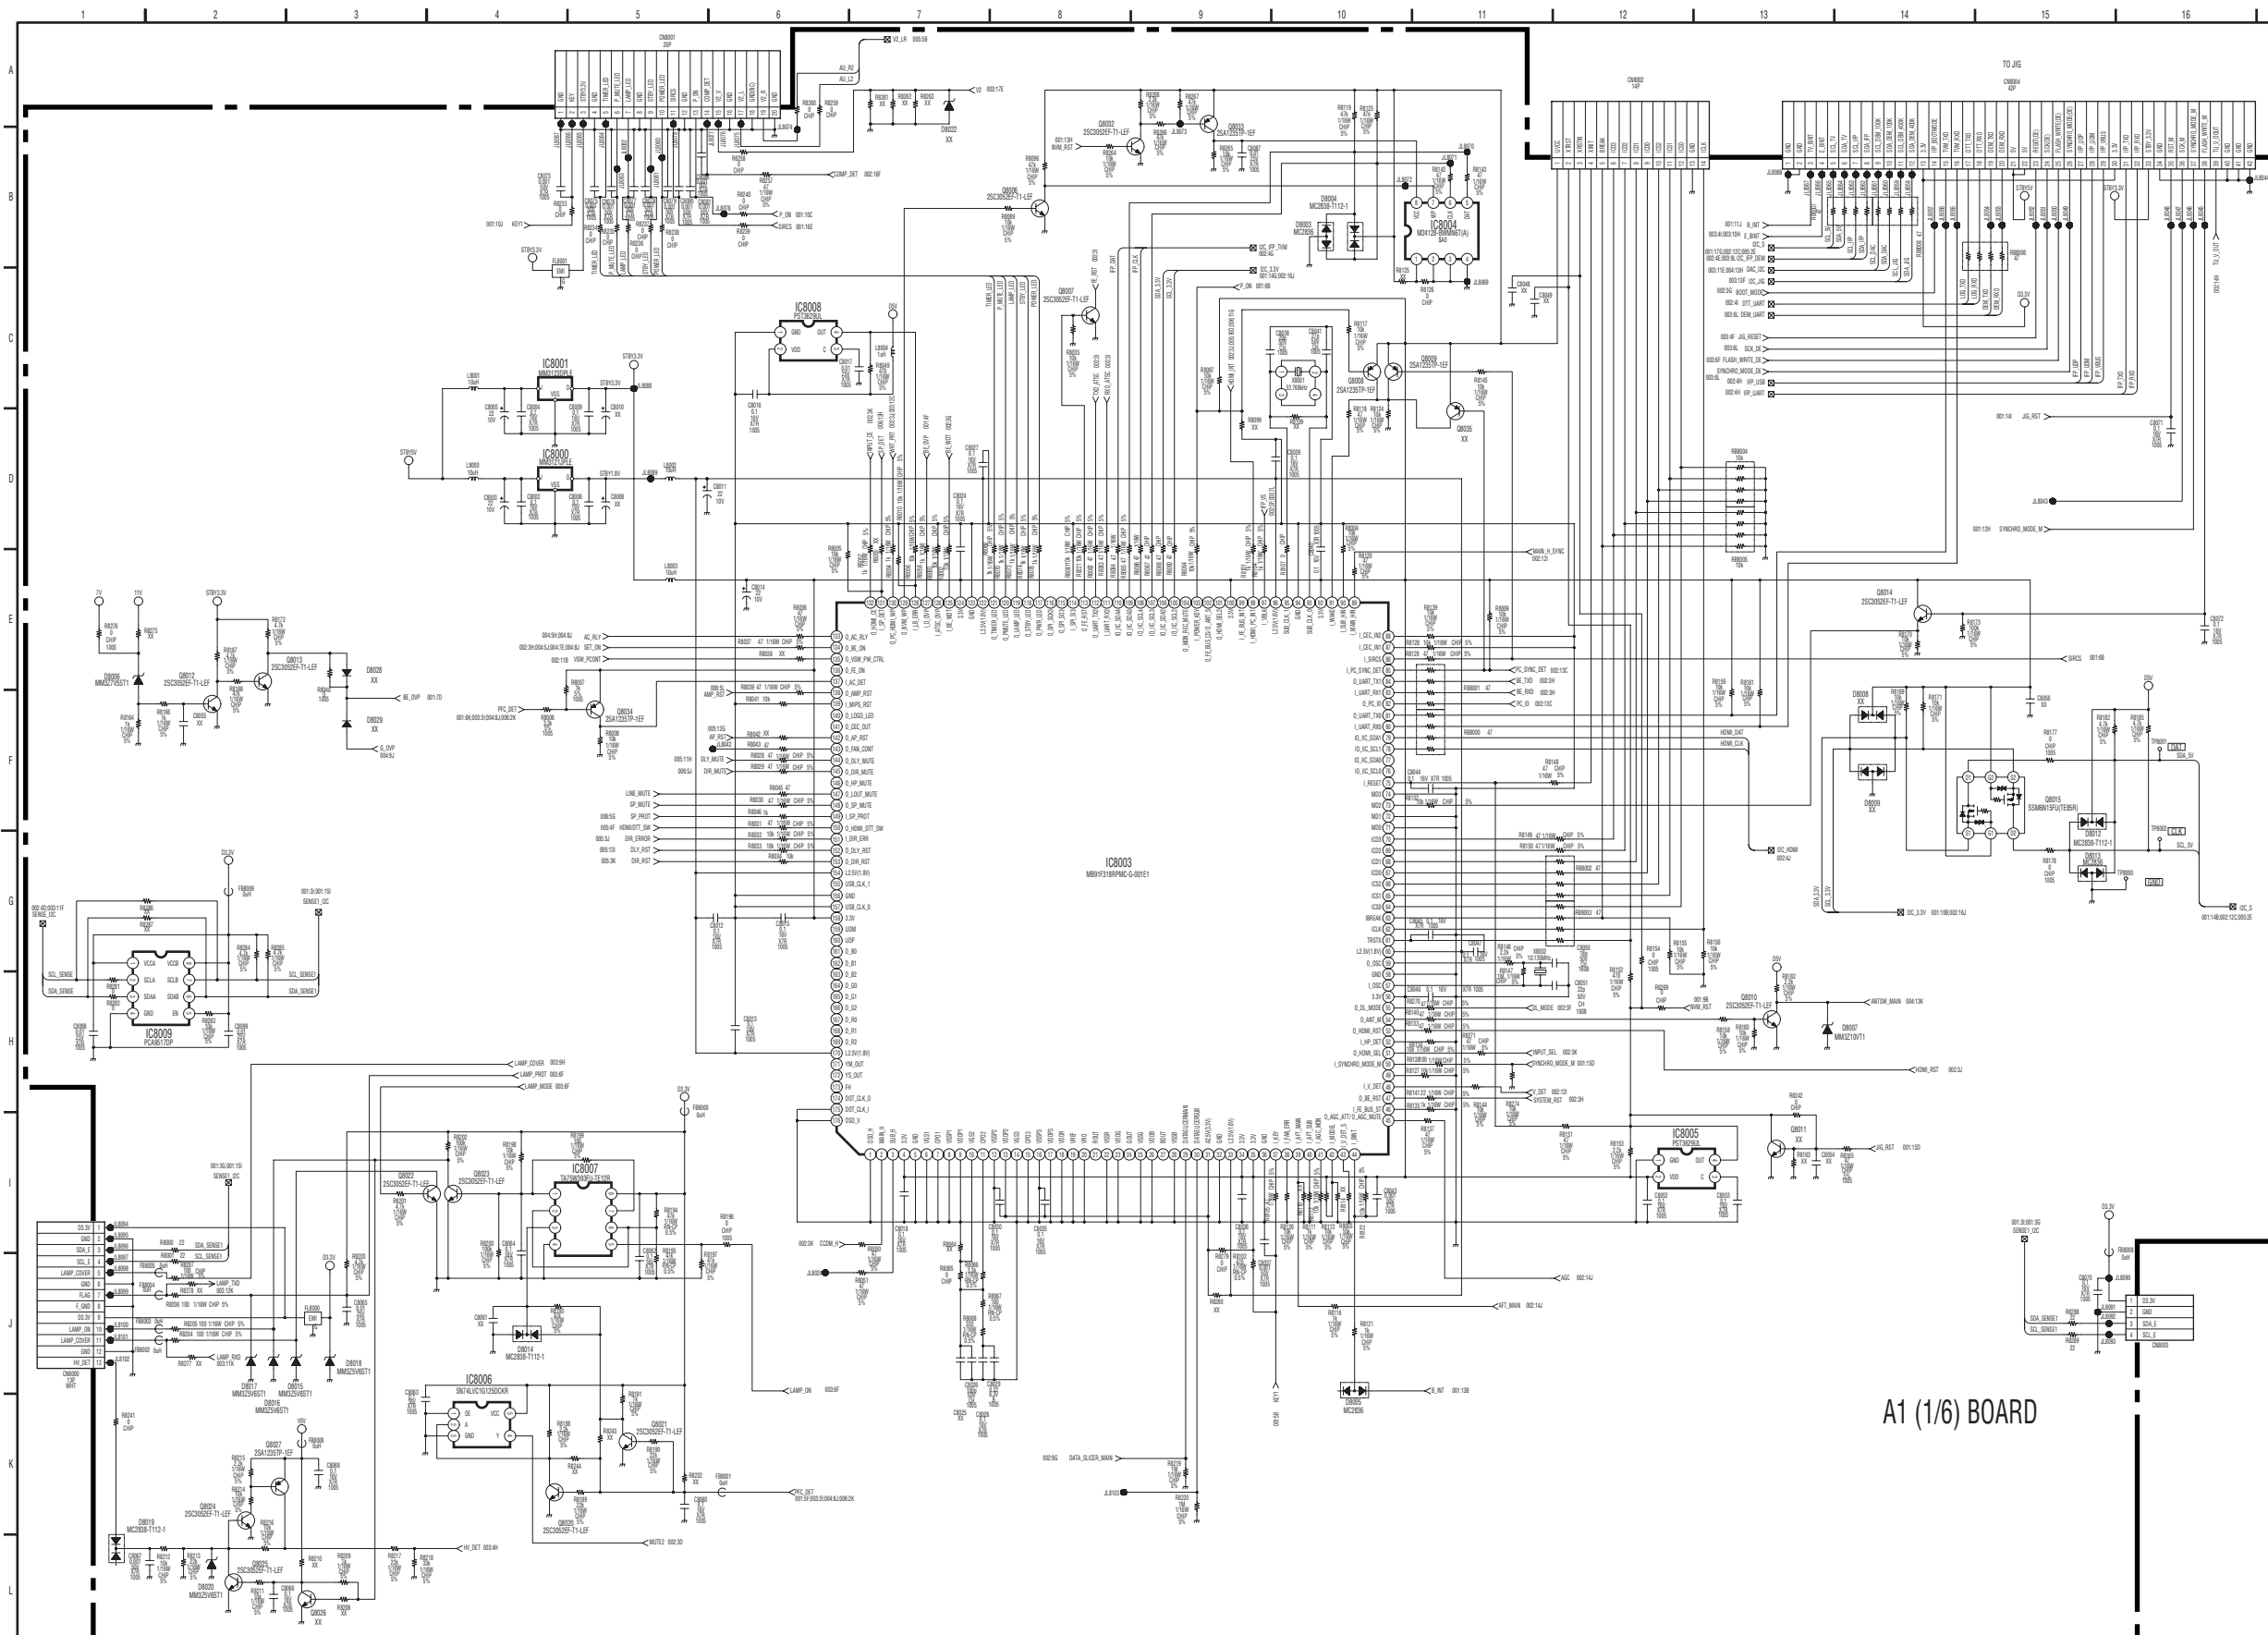


(2) Schematic Diagram of A1 (2/6) Board

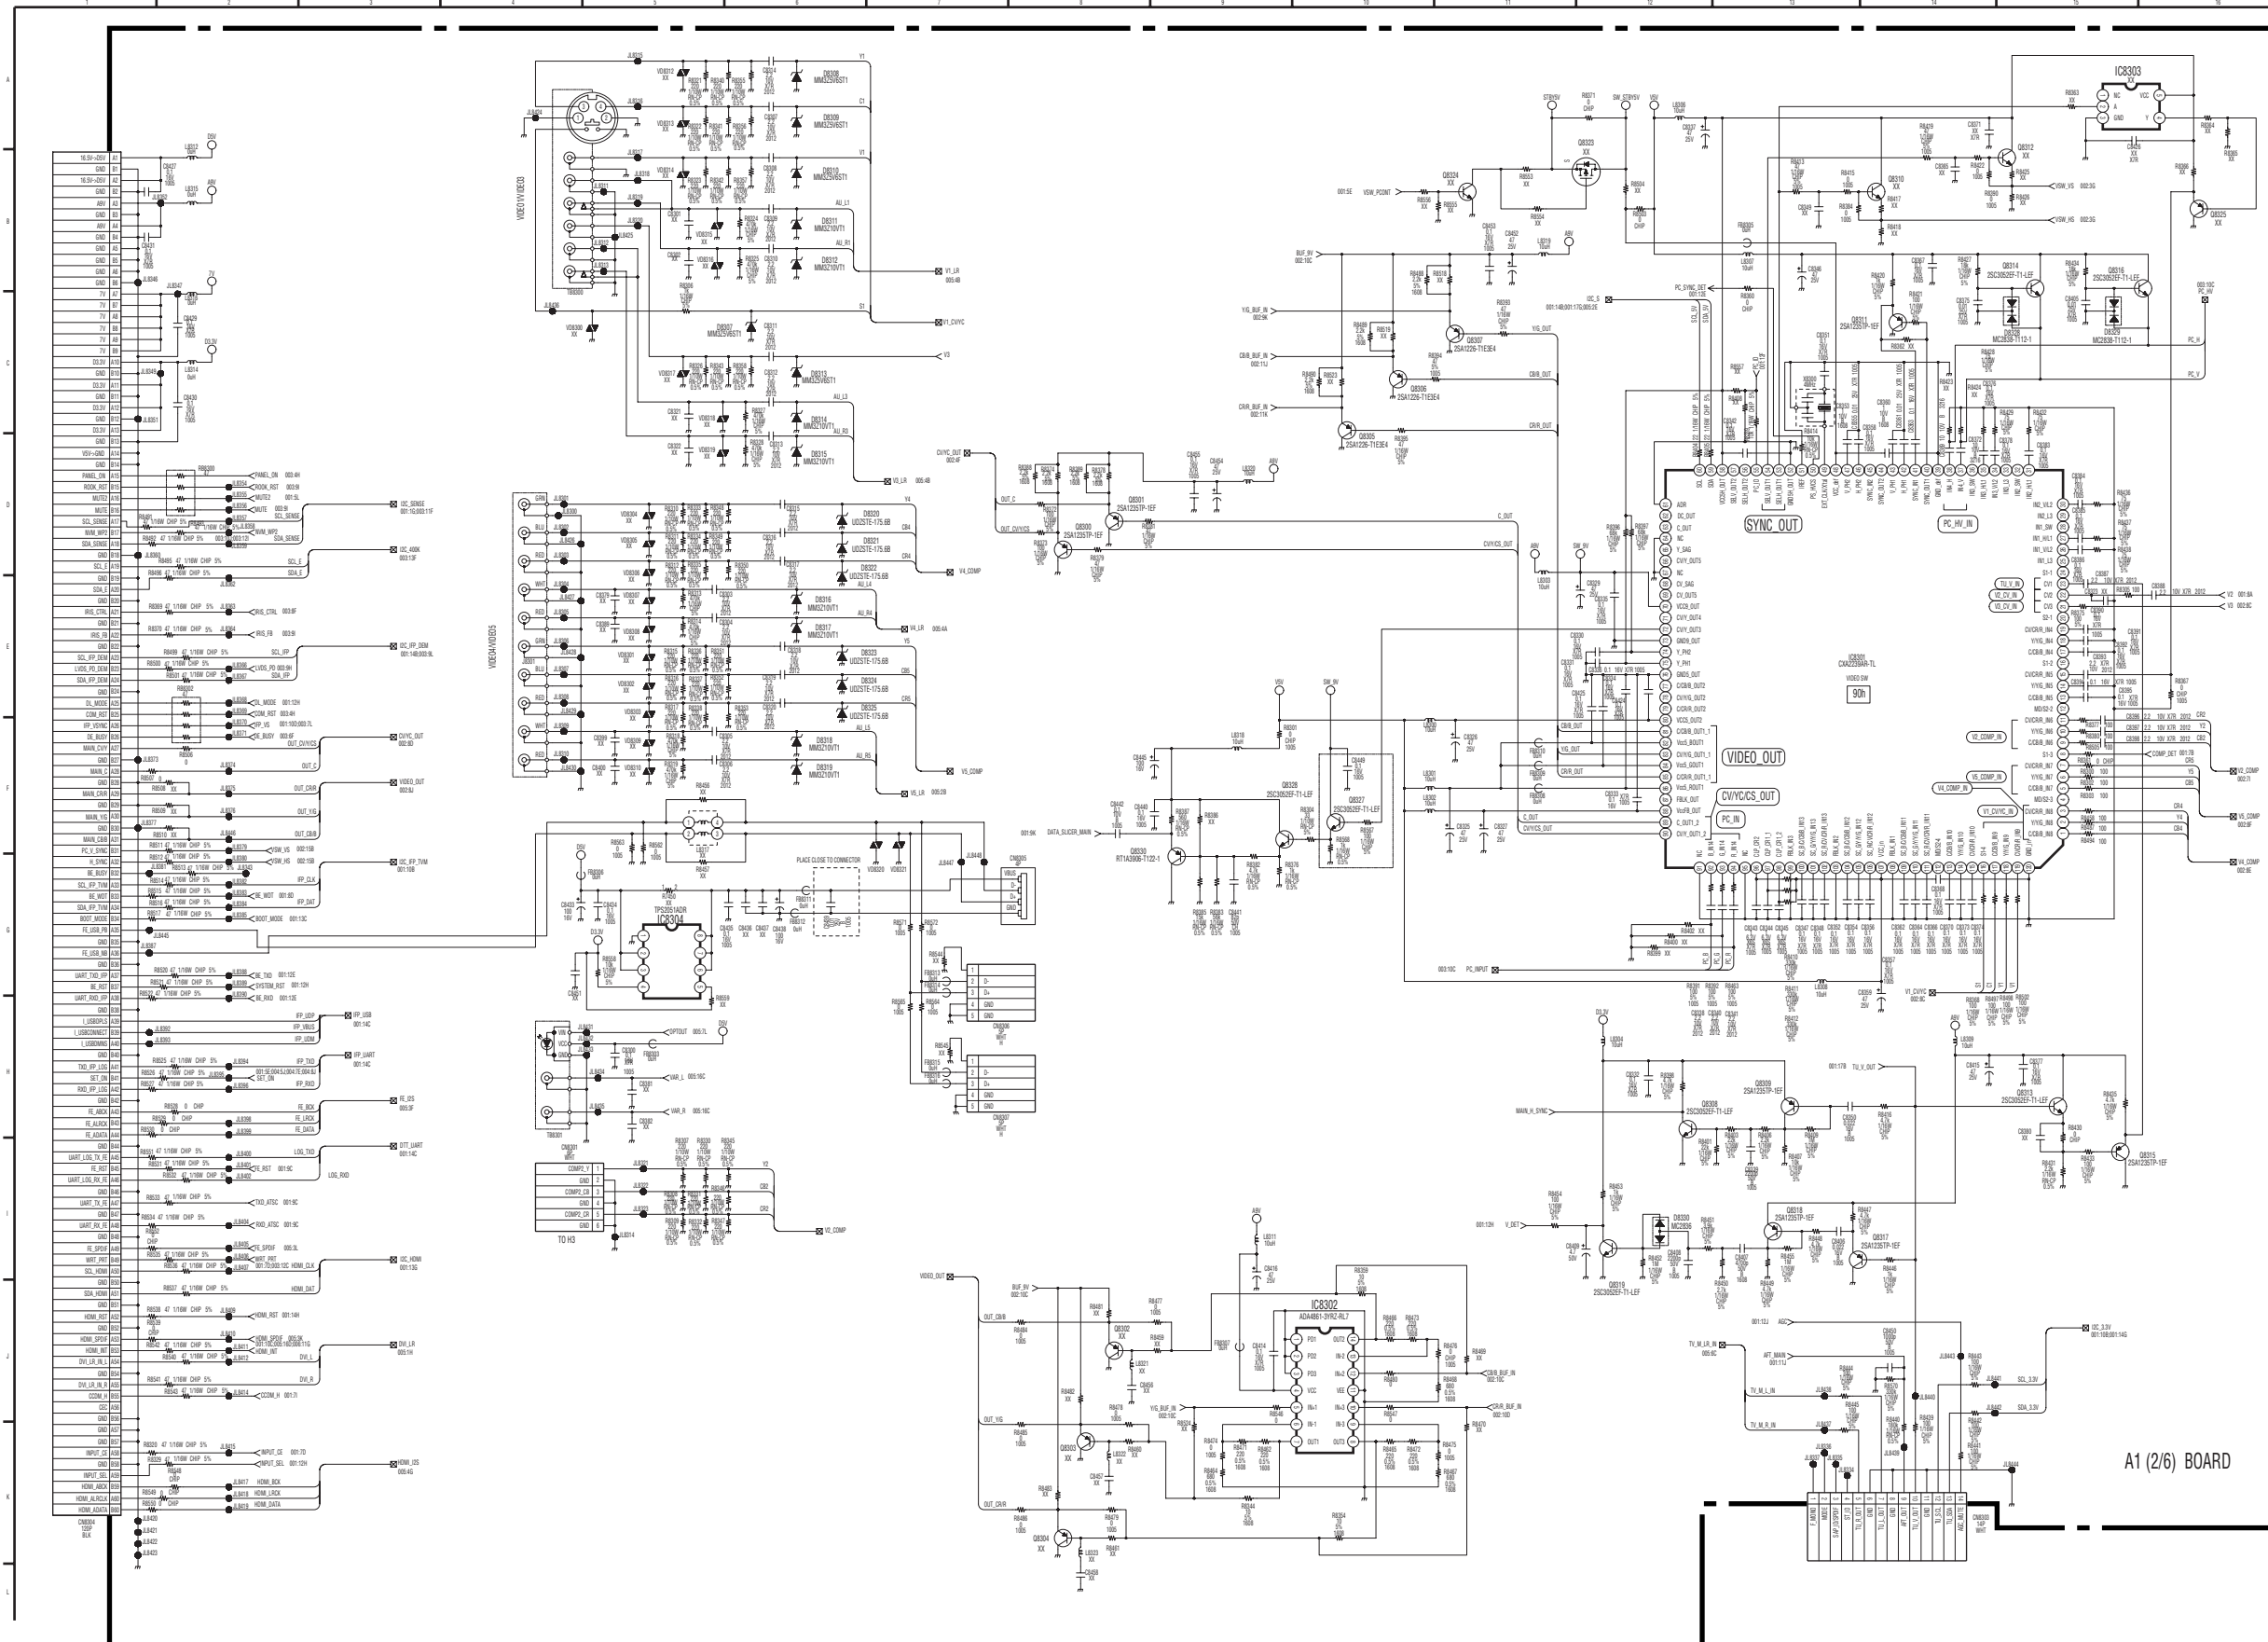

A1 (2/6) BOARD




(3) Schematic Diagram of A1 (3/6) Board

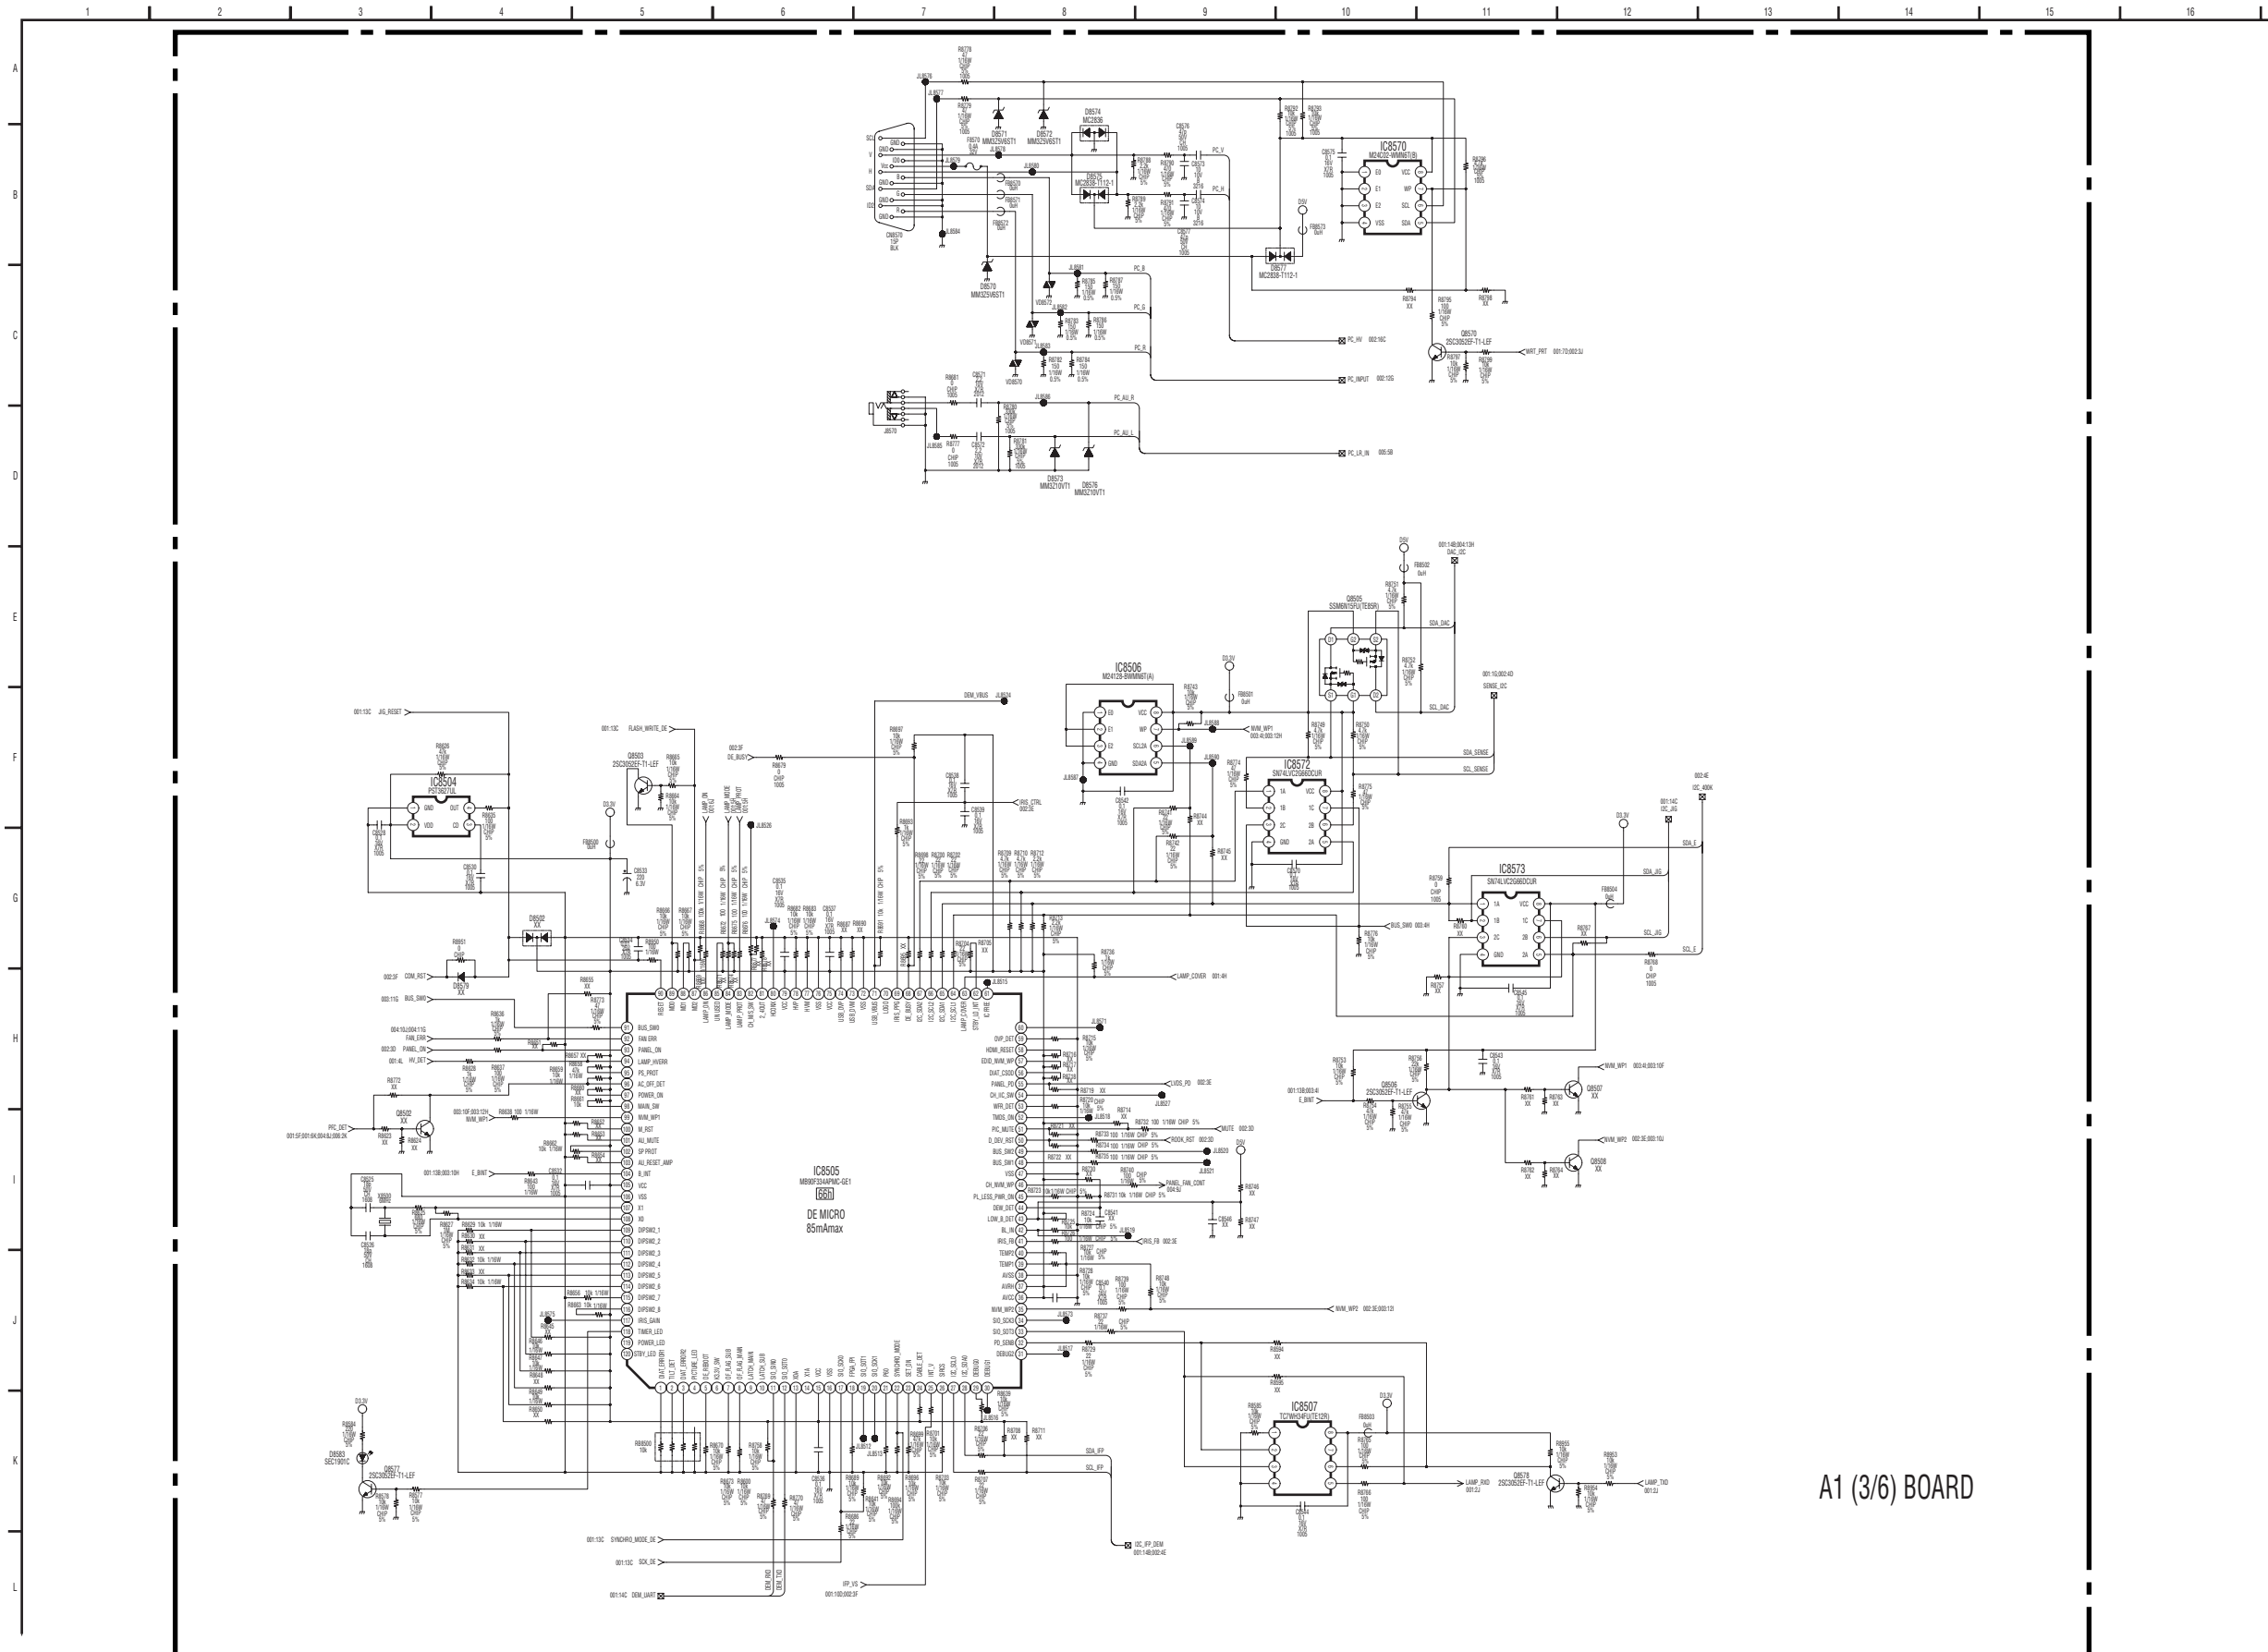


A1 (3/6) BOARD

(4) Schematic Diagram of A1 (4/6) Board

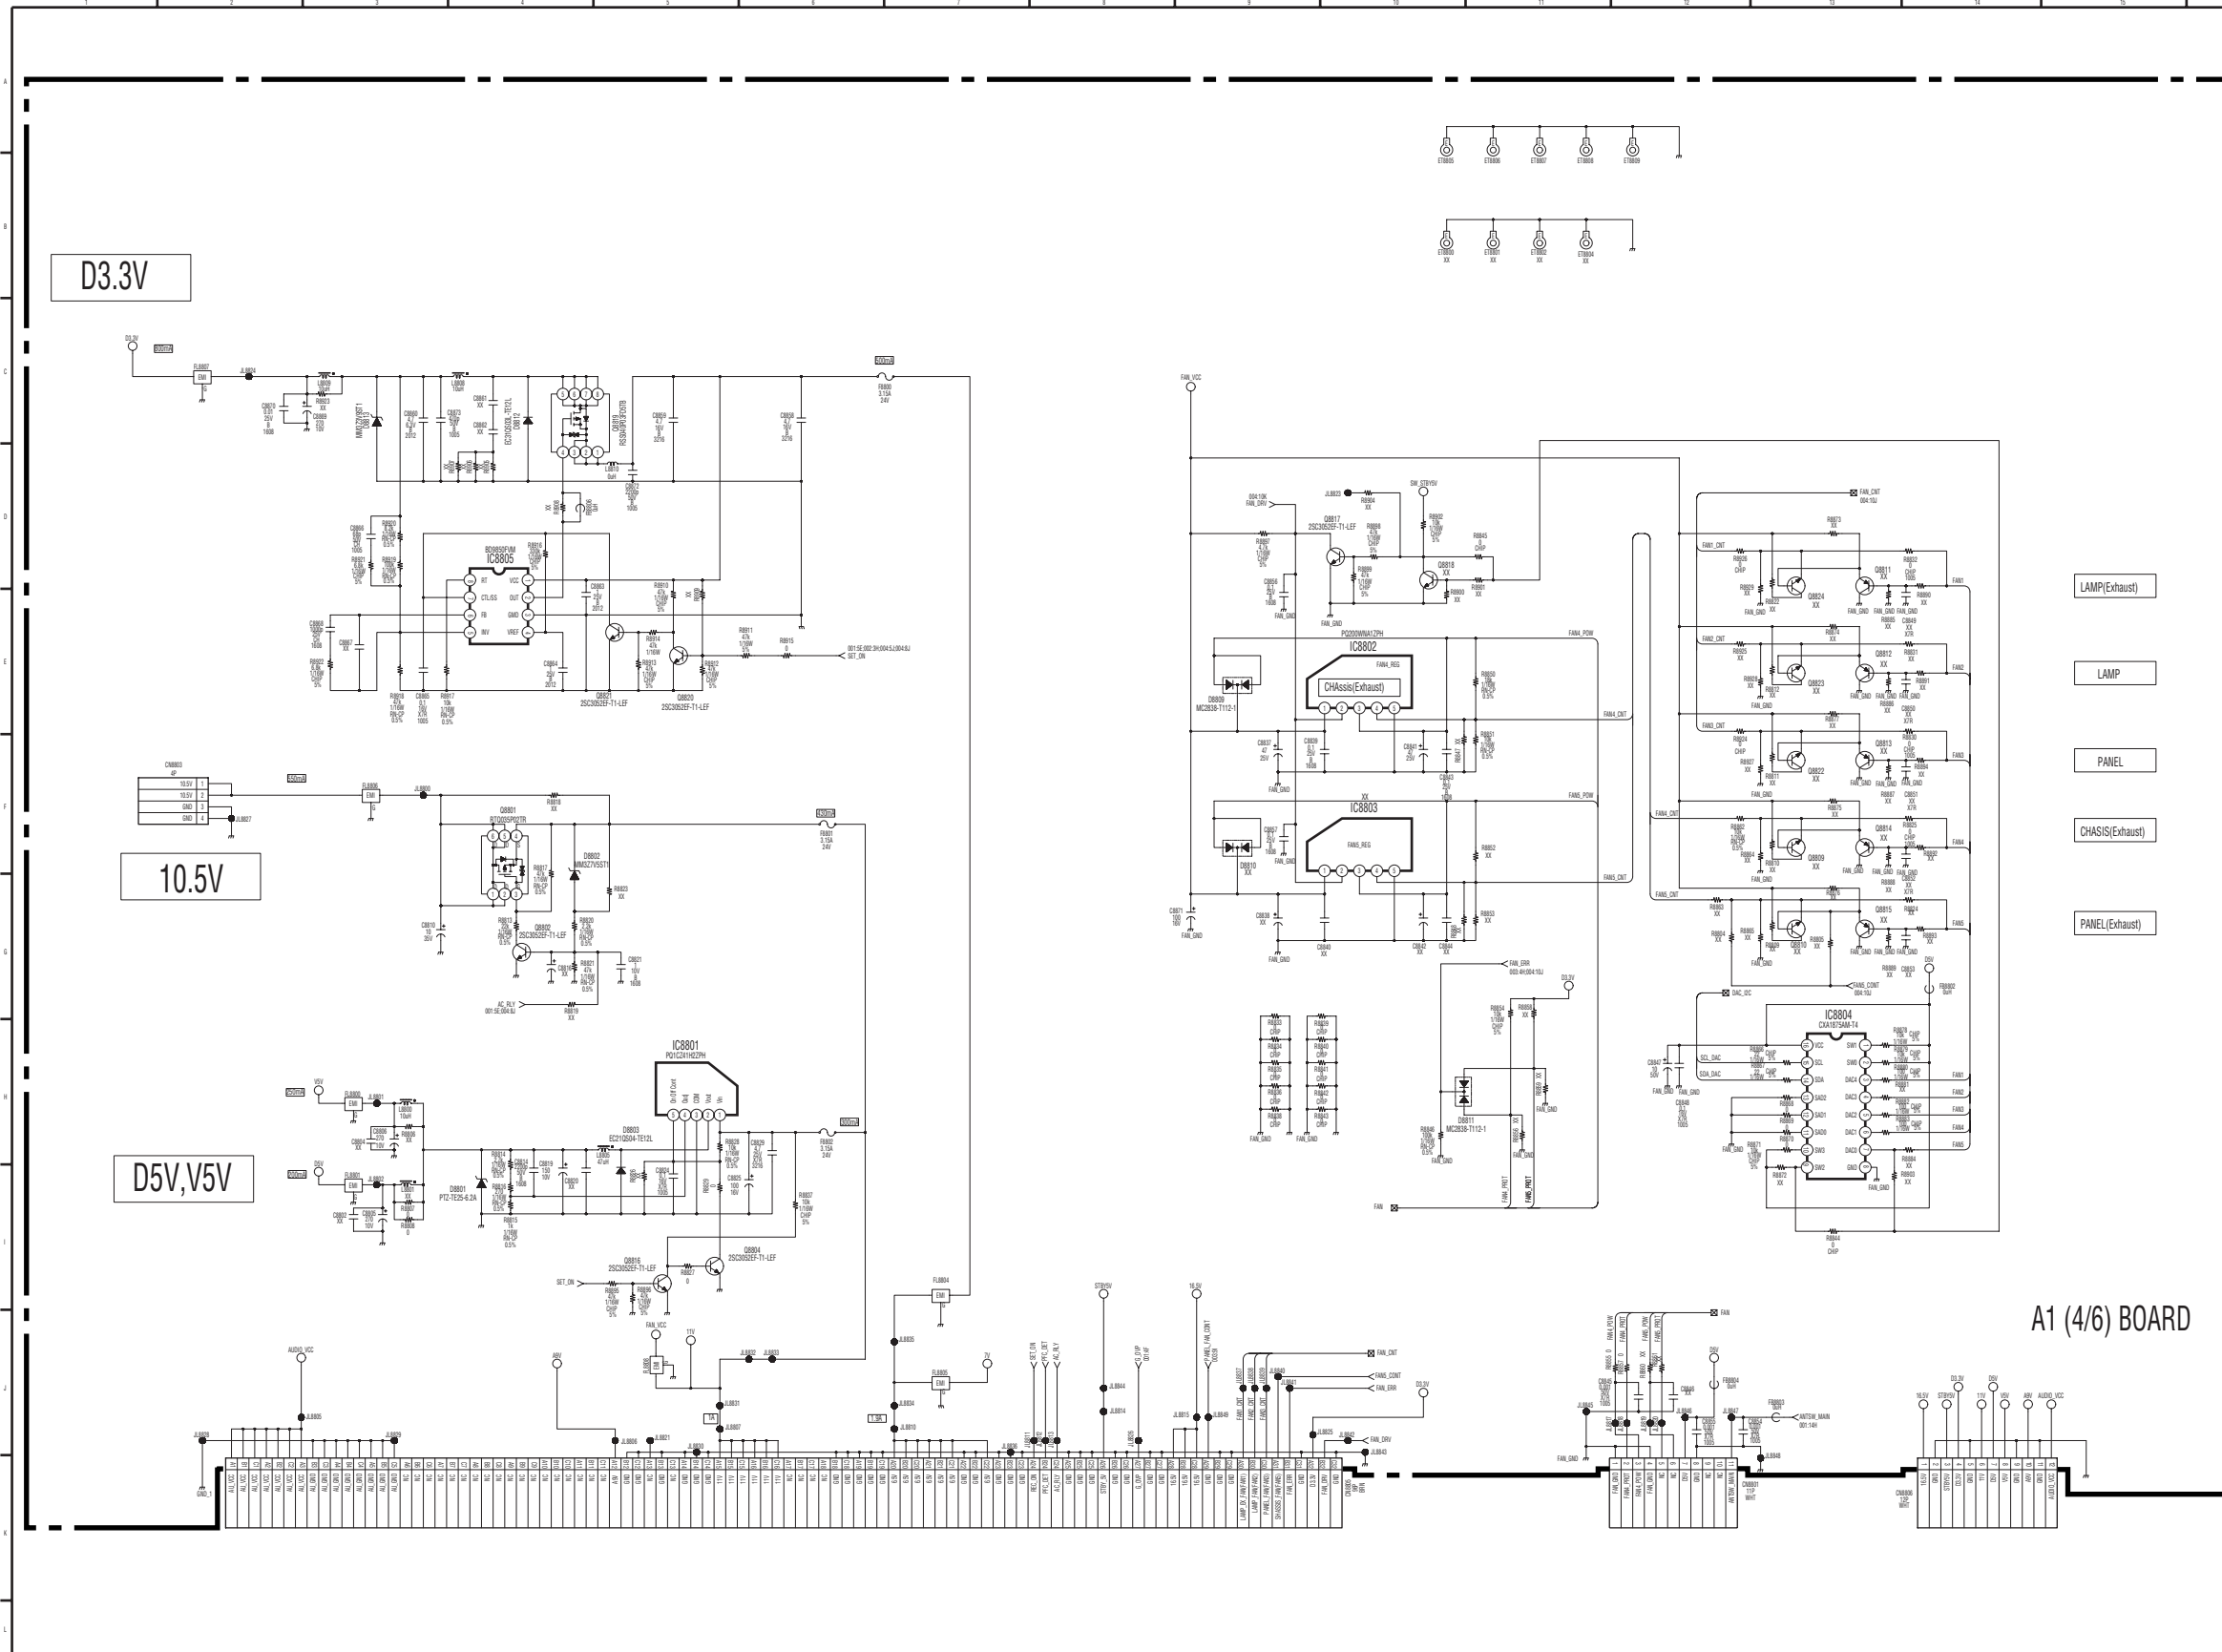


A1 (4/6) BOARD

(5) Schematic Diagram of A1 (5/6) Board

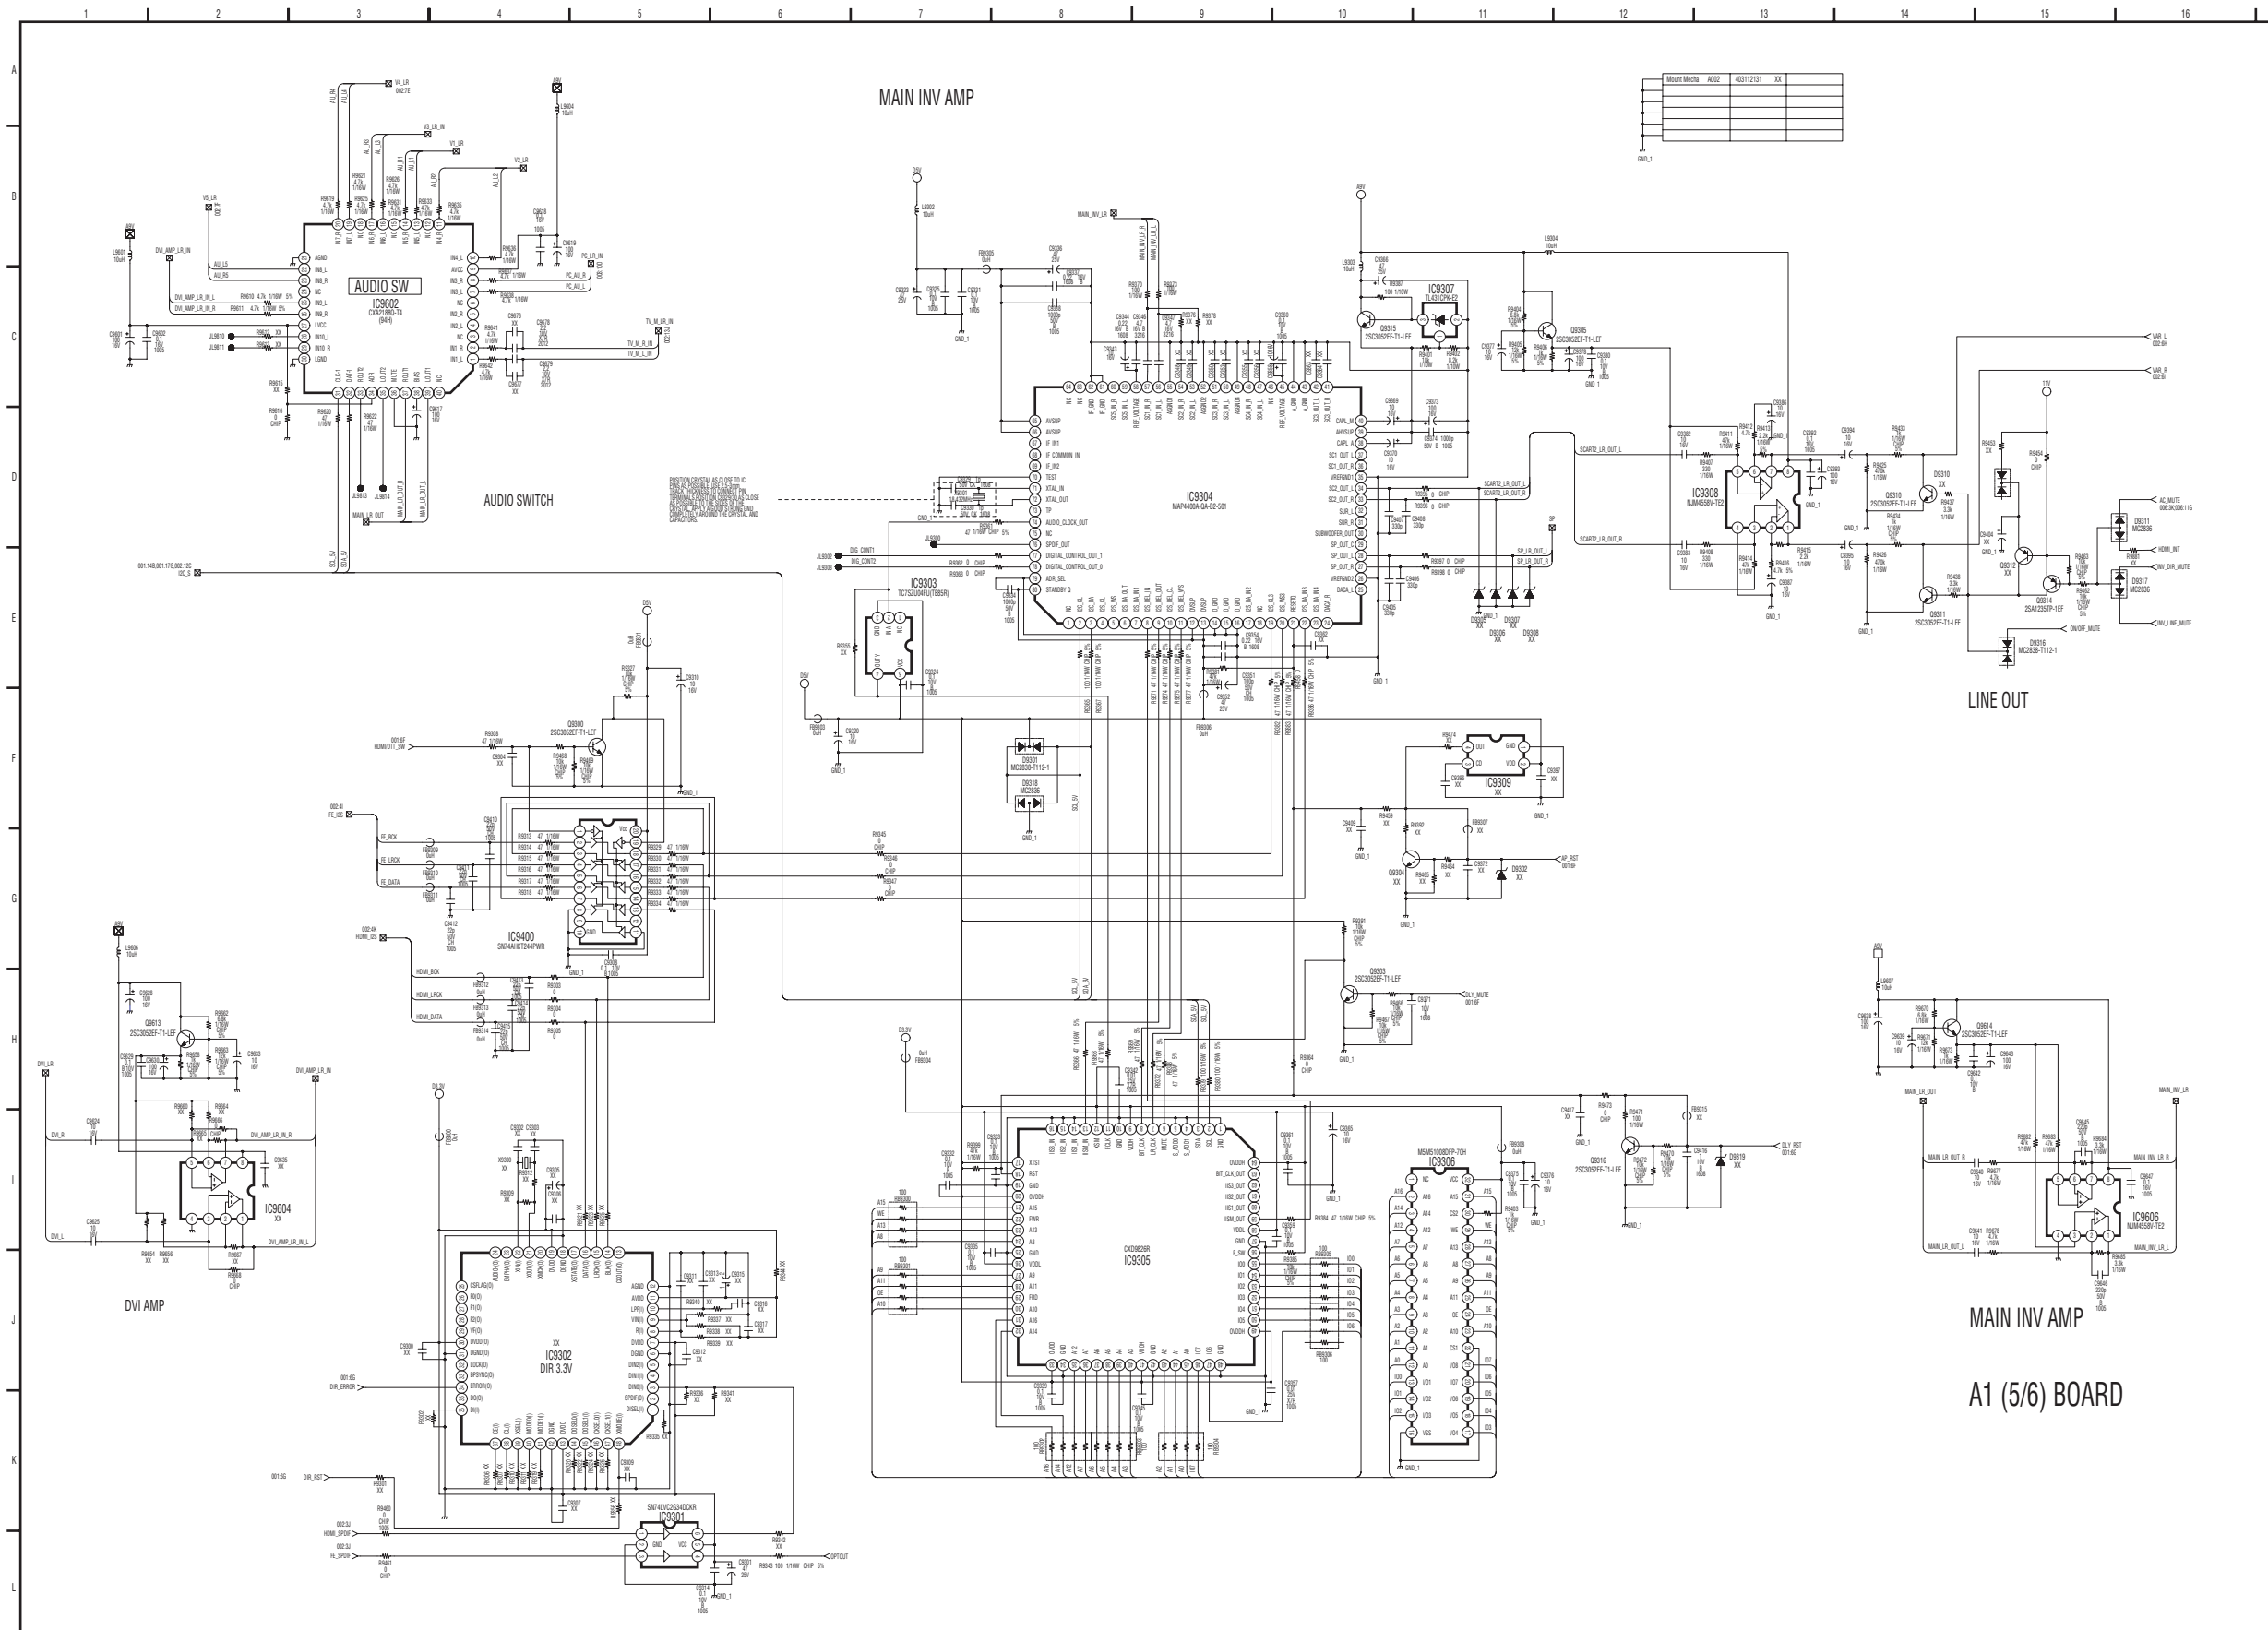


(6) Schematic Diagram of A1 (6/6) Board

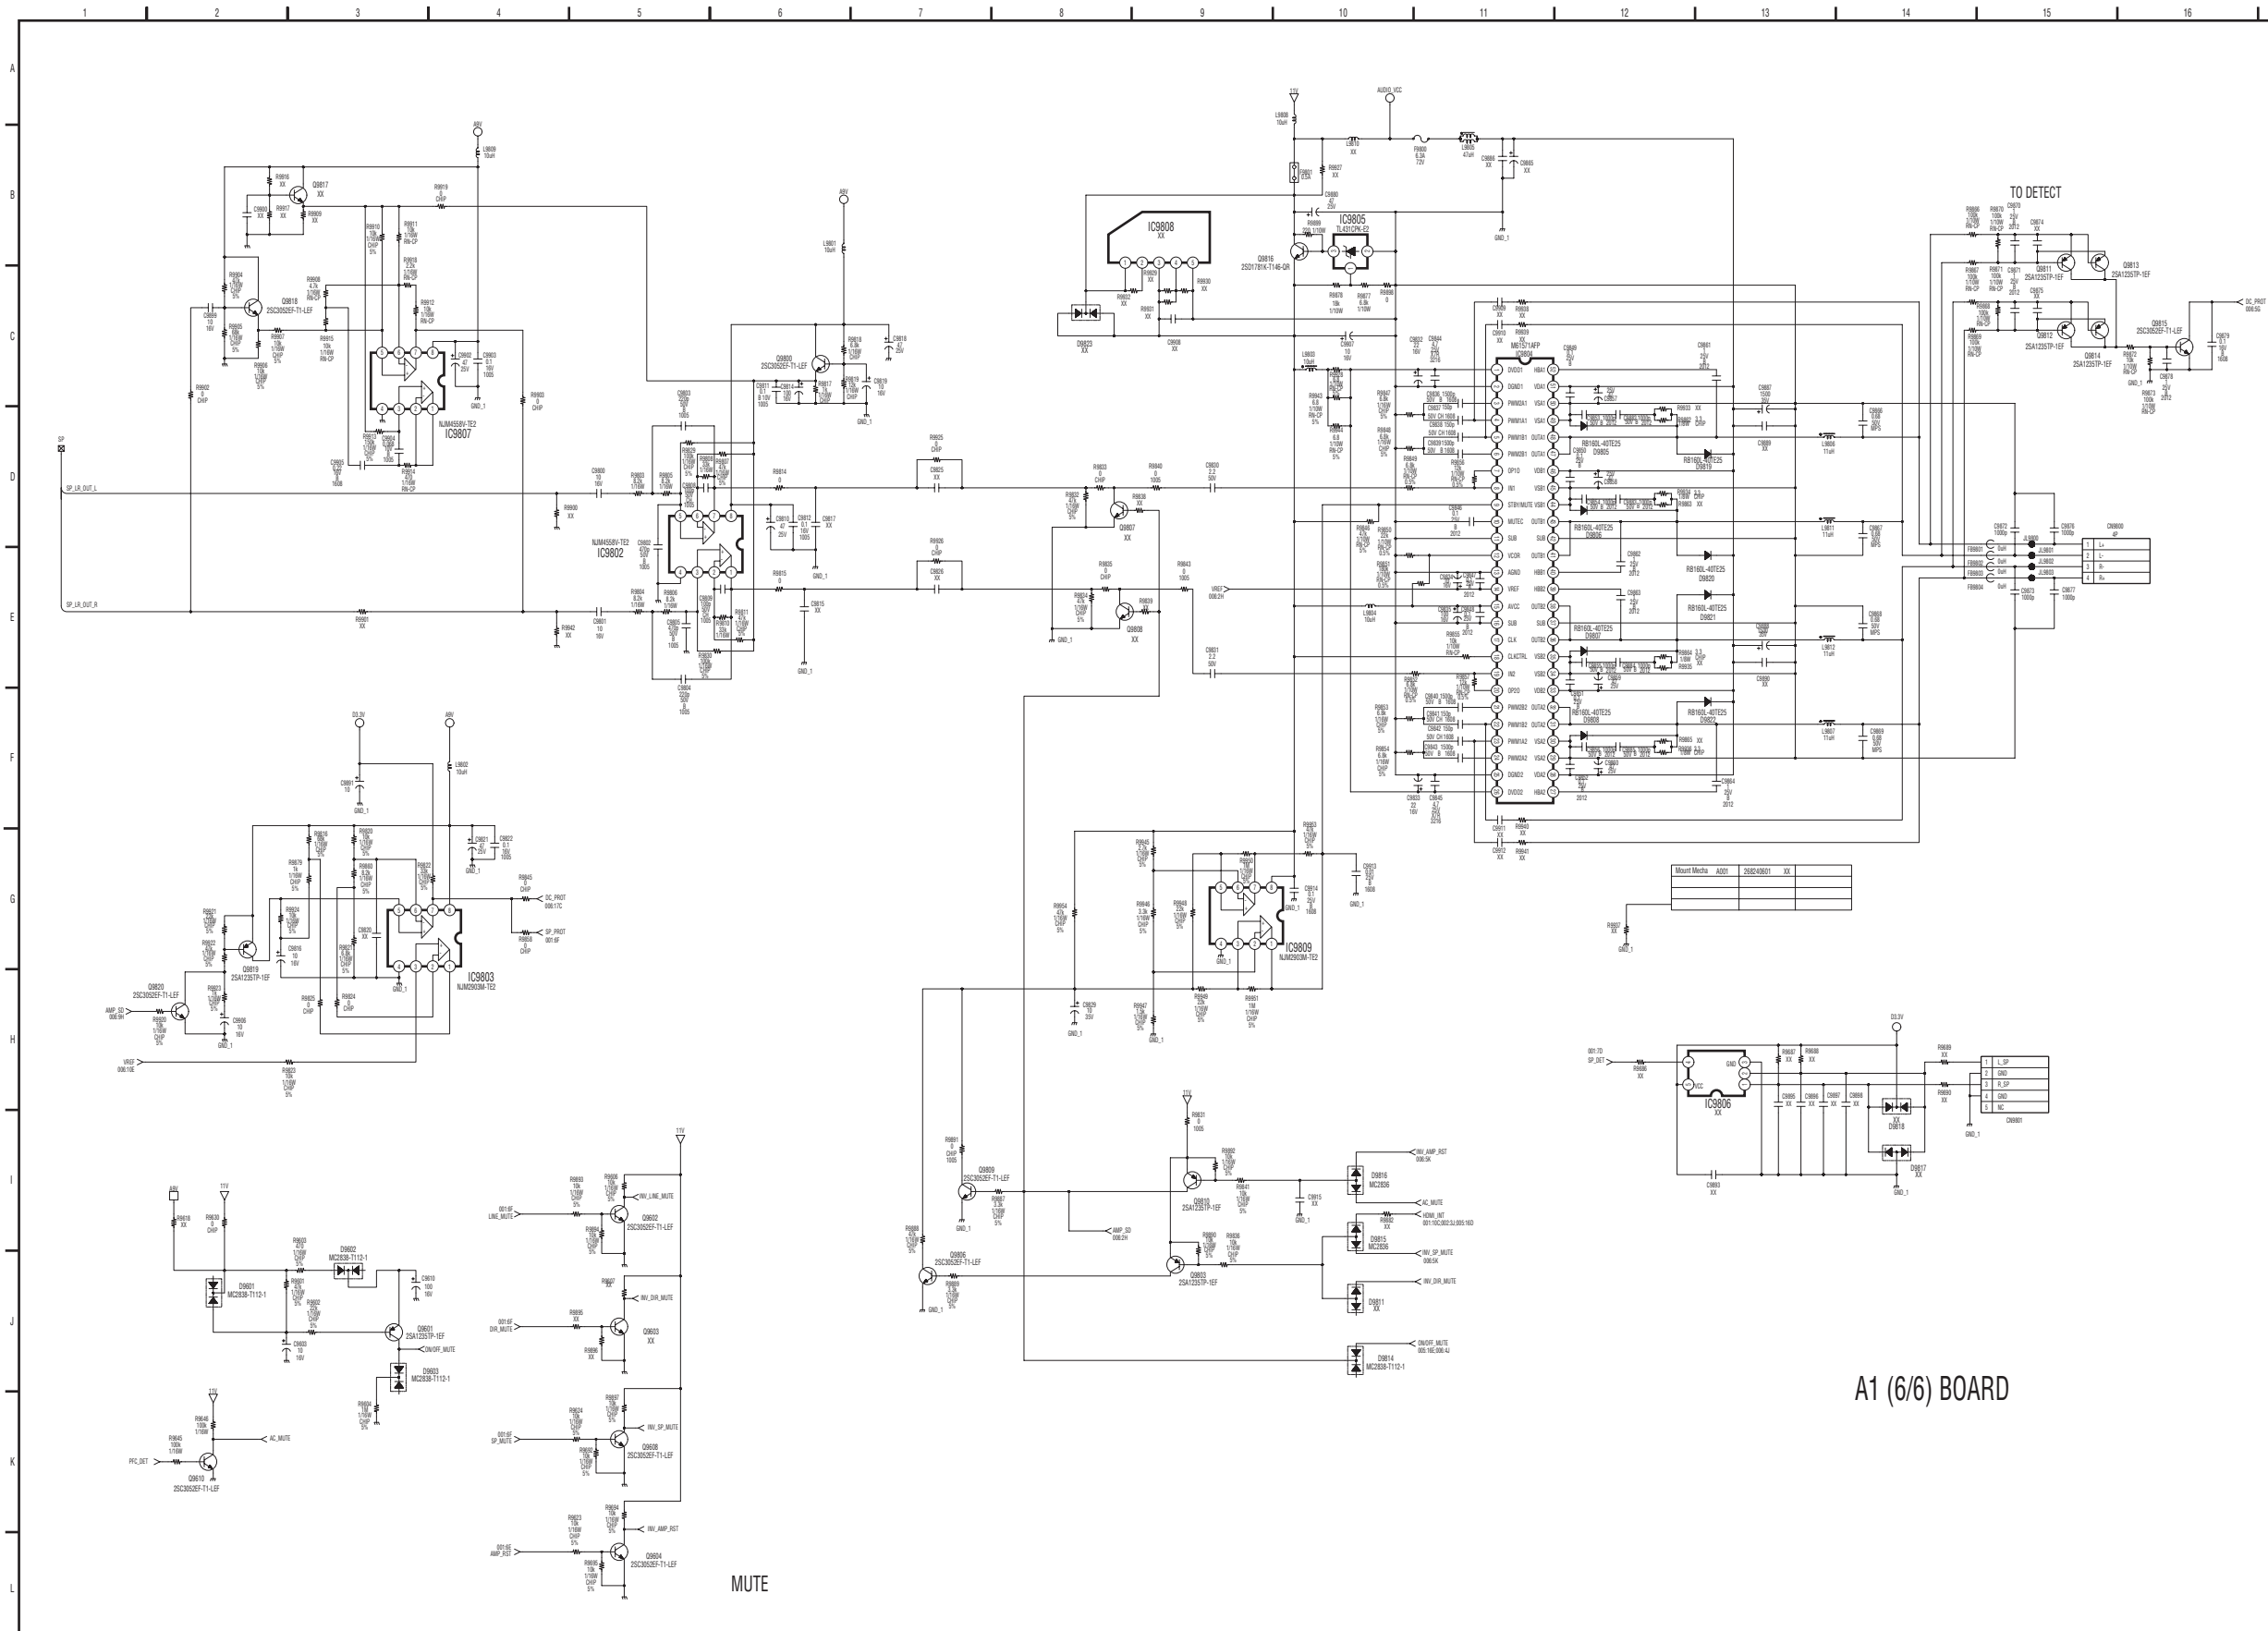


A1 (6/6) BOARD

(7) Schematic Diagram of B1 (1/11) Board

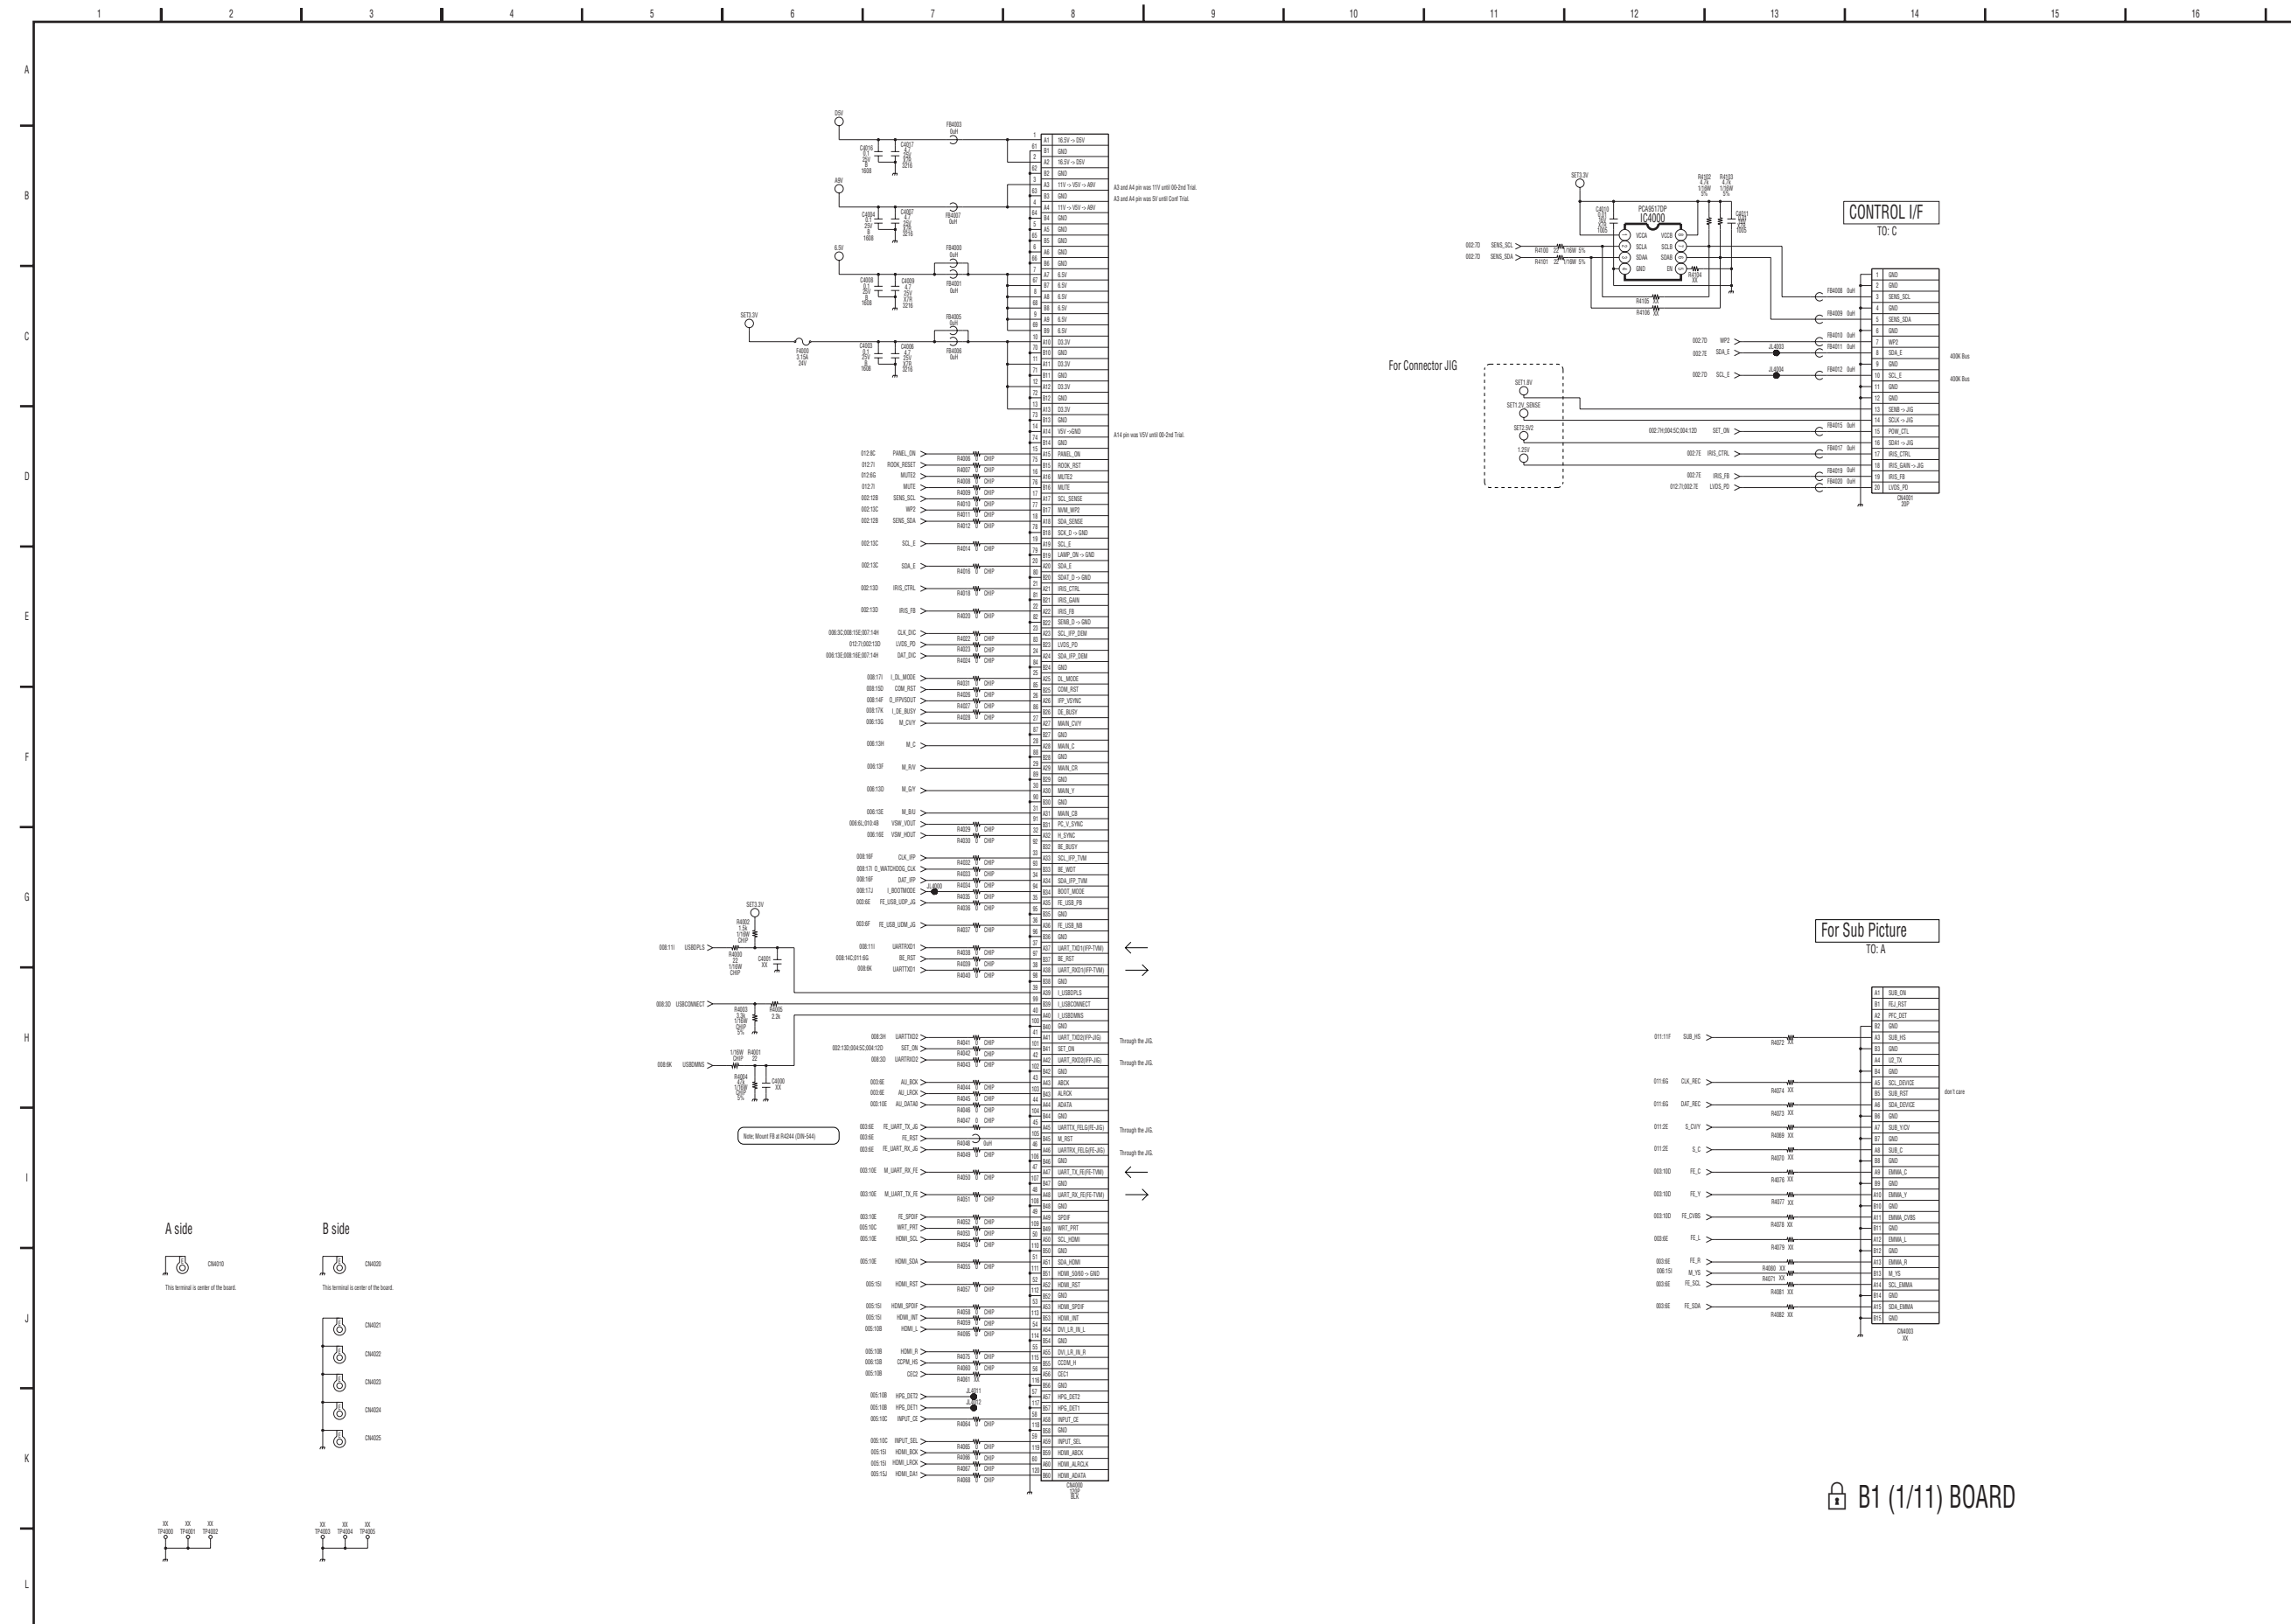


B1 (1/11) BOARD

(8) Schematic Diagram of B1 (2/11) Board

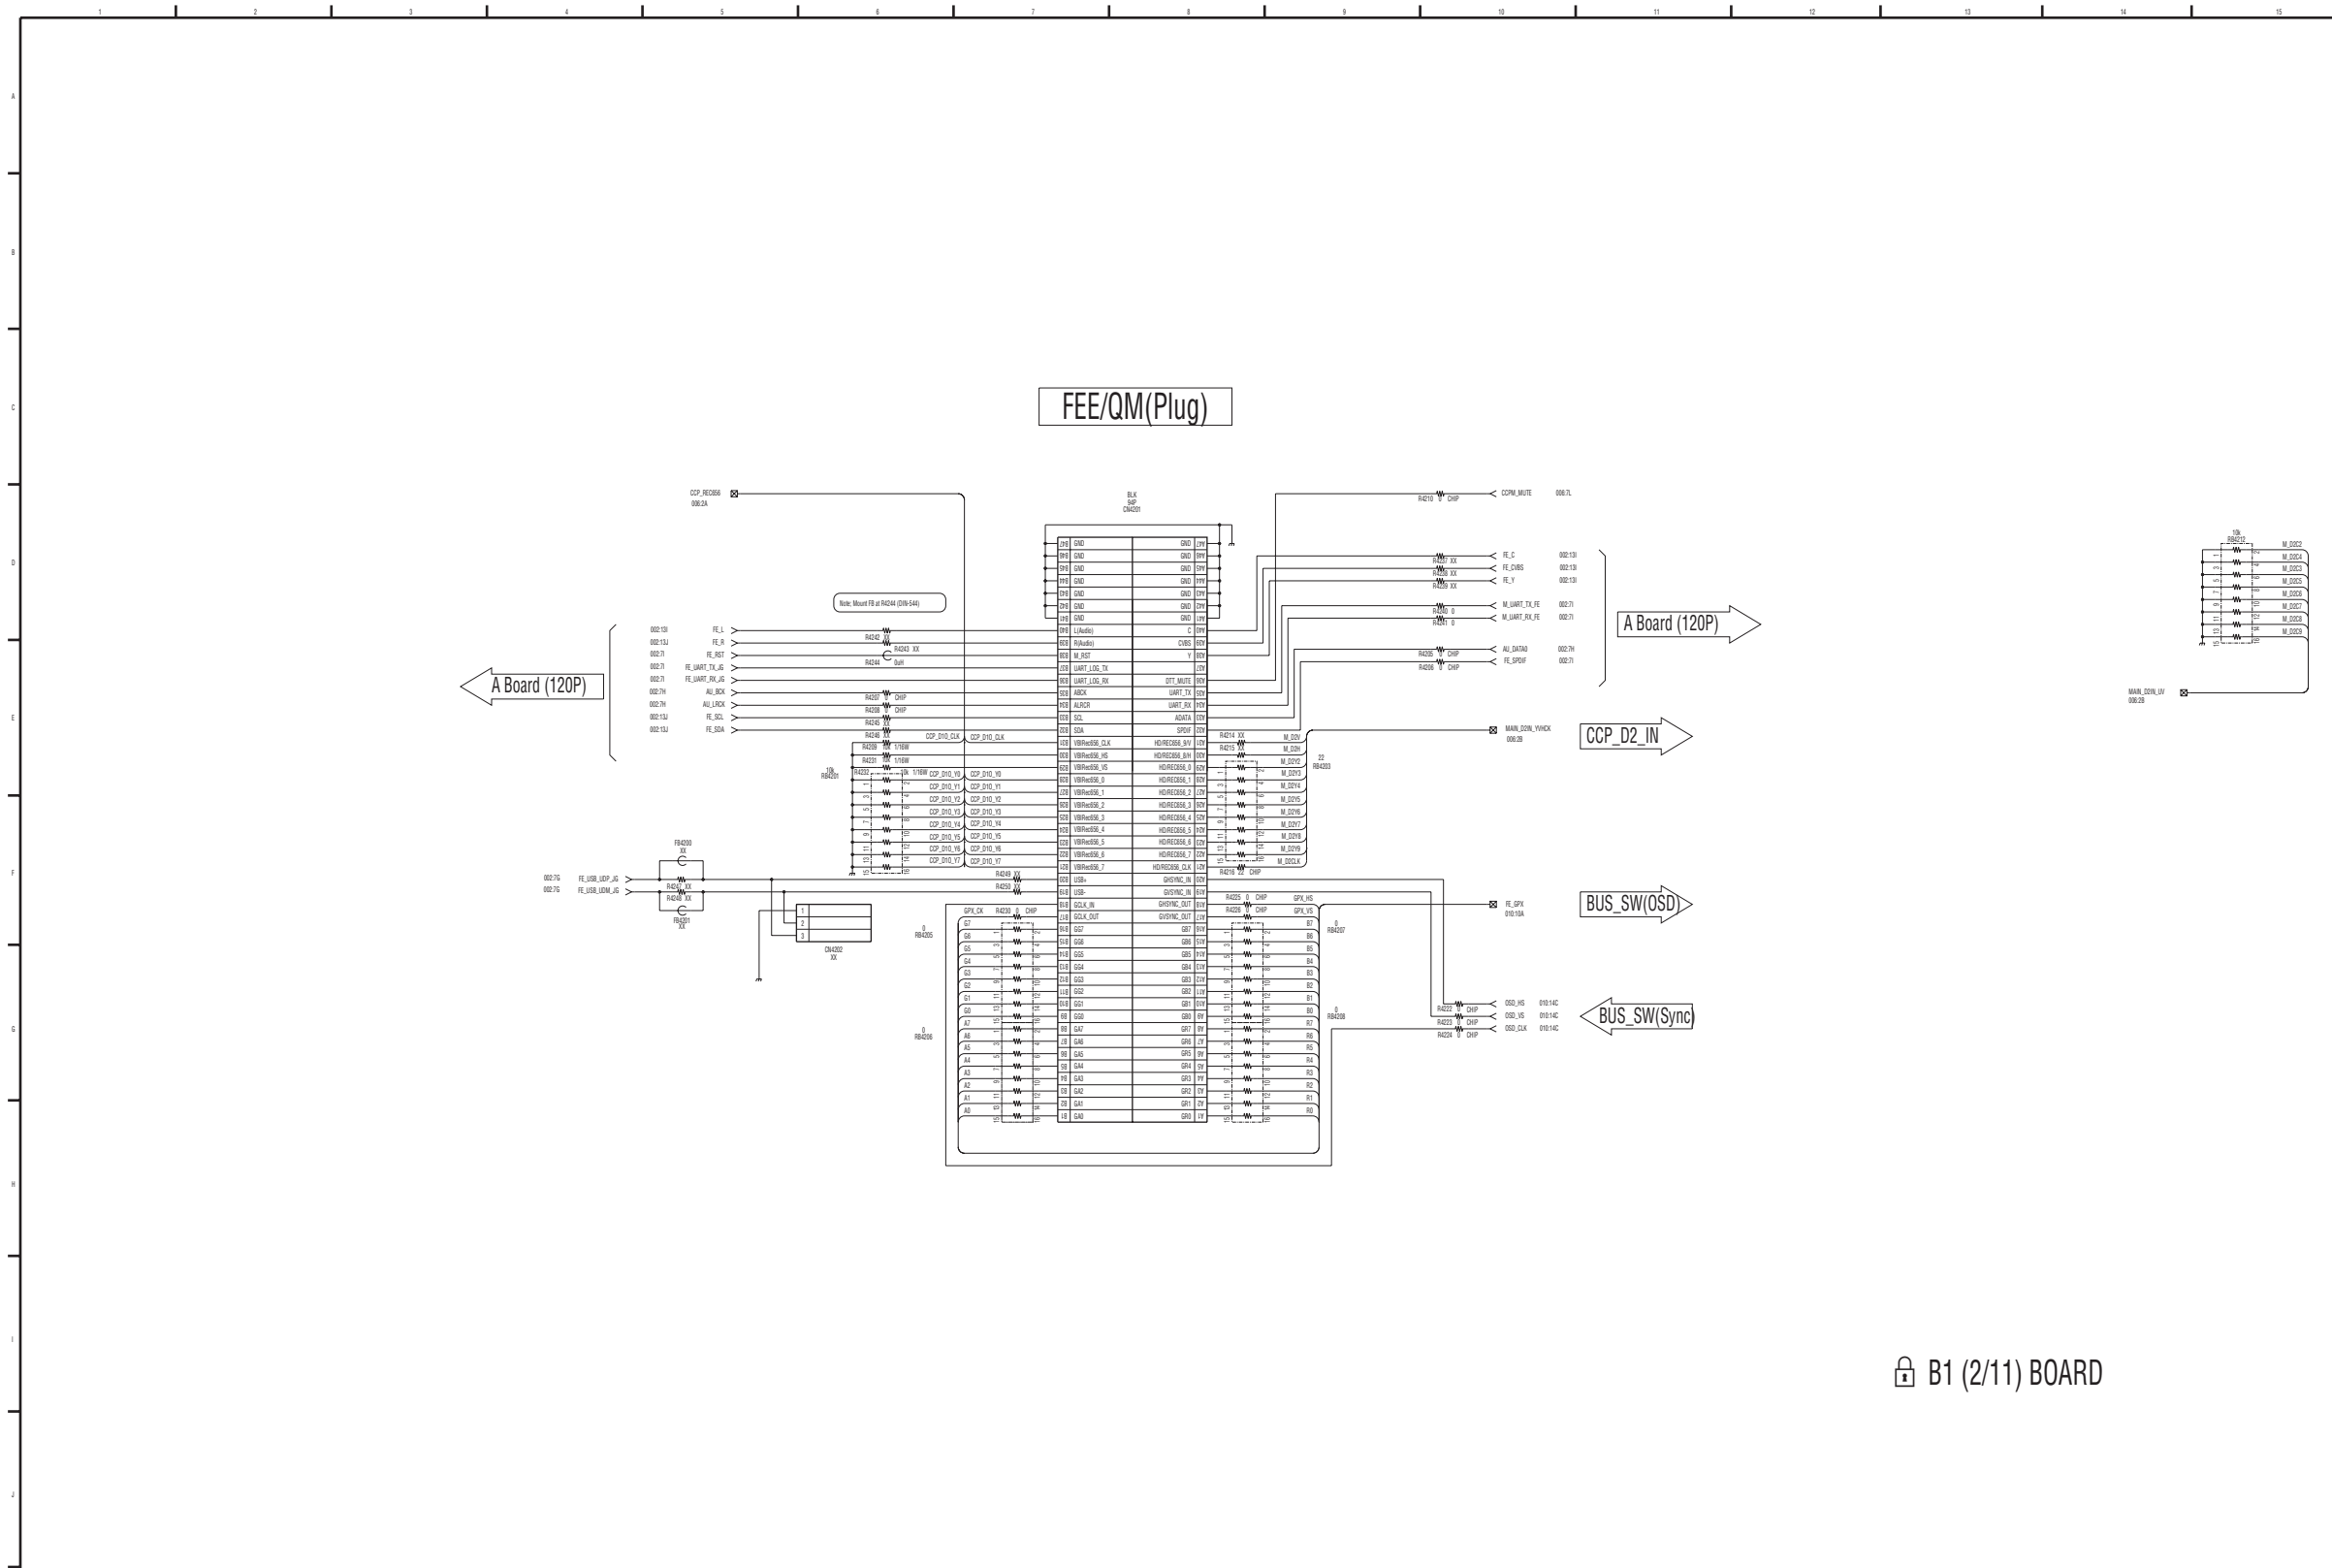


B1 (2/11) BOARD

(9) Schematic Diagram of B1 (3/11) Board

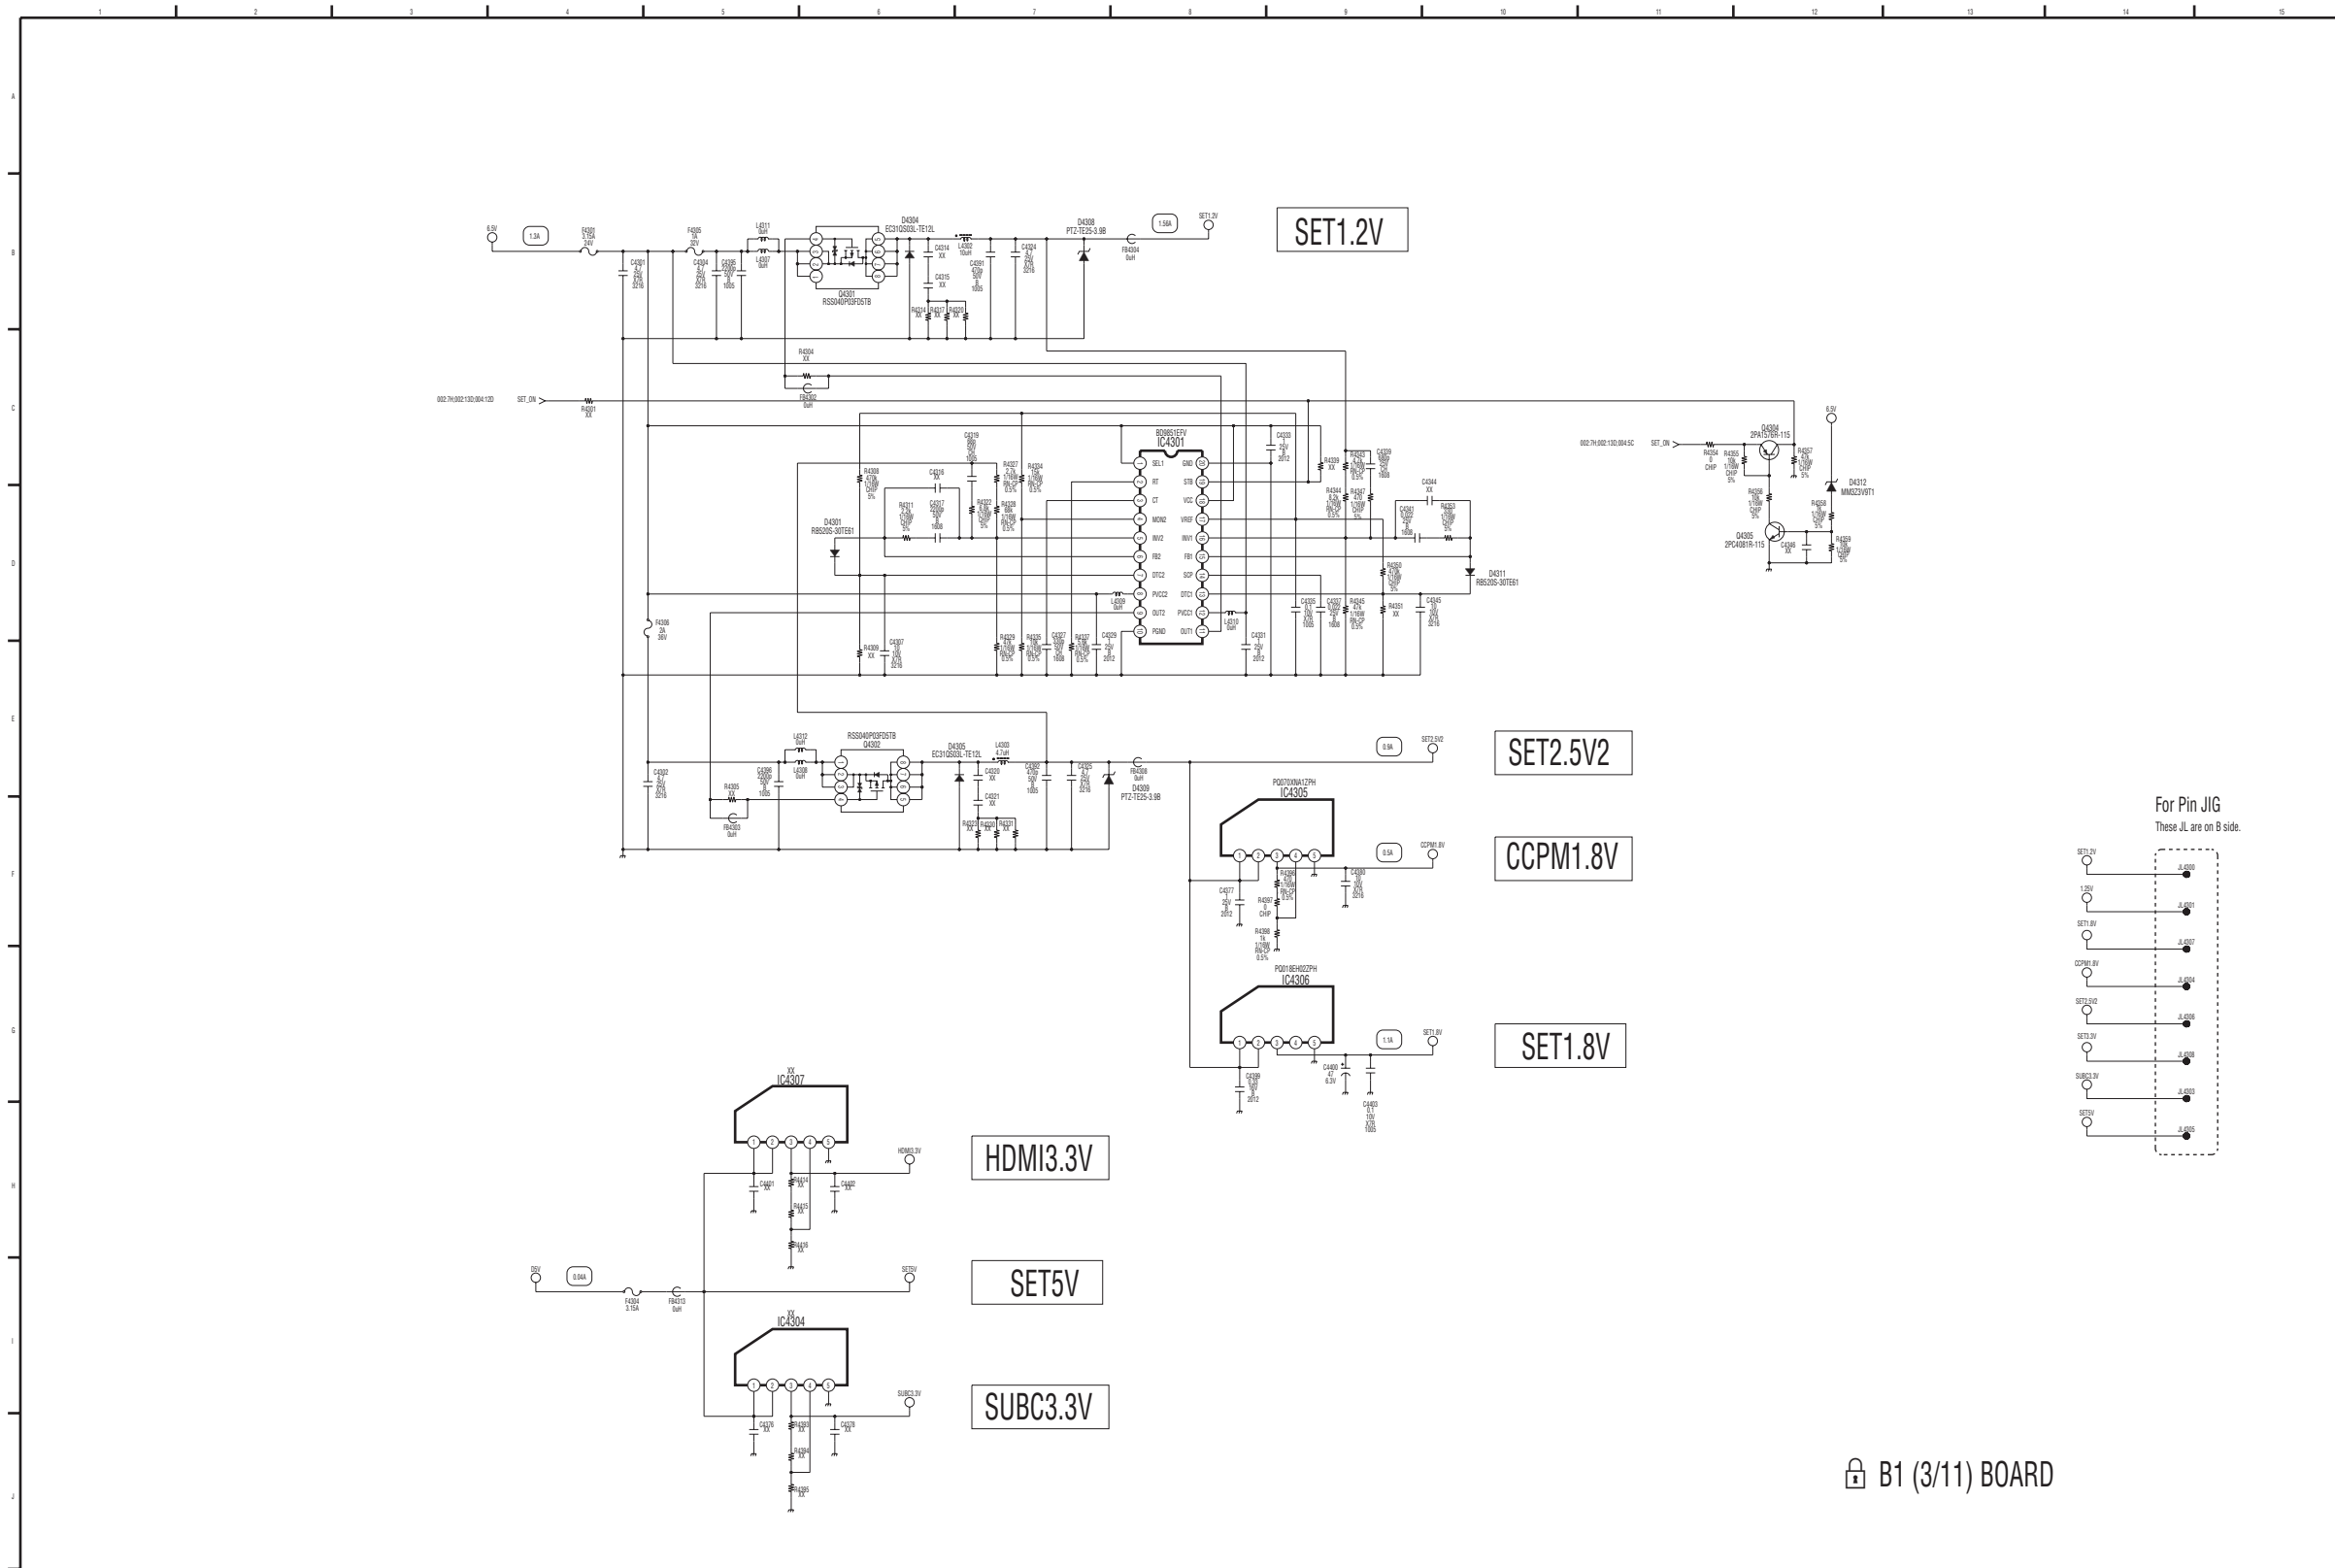

B1 (3/11) BOARD

(10) Schematic Diagram of B1 (4/11) Board

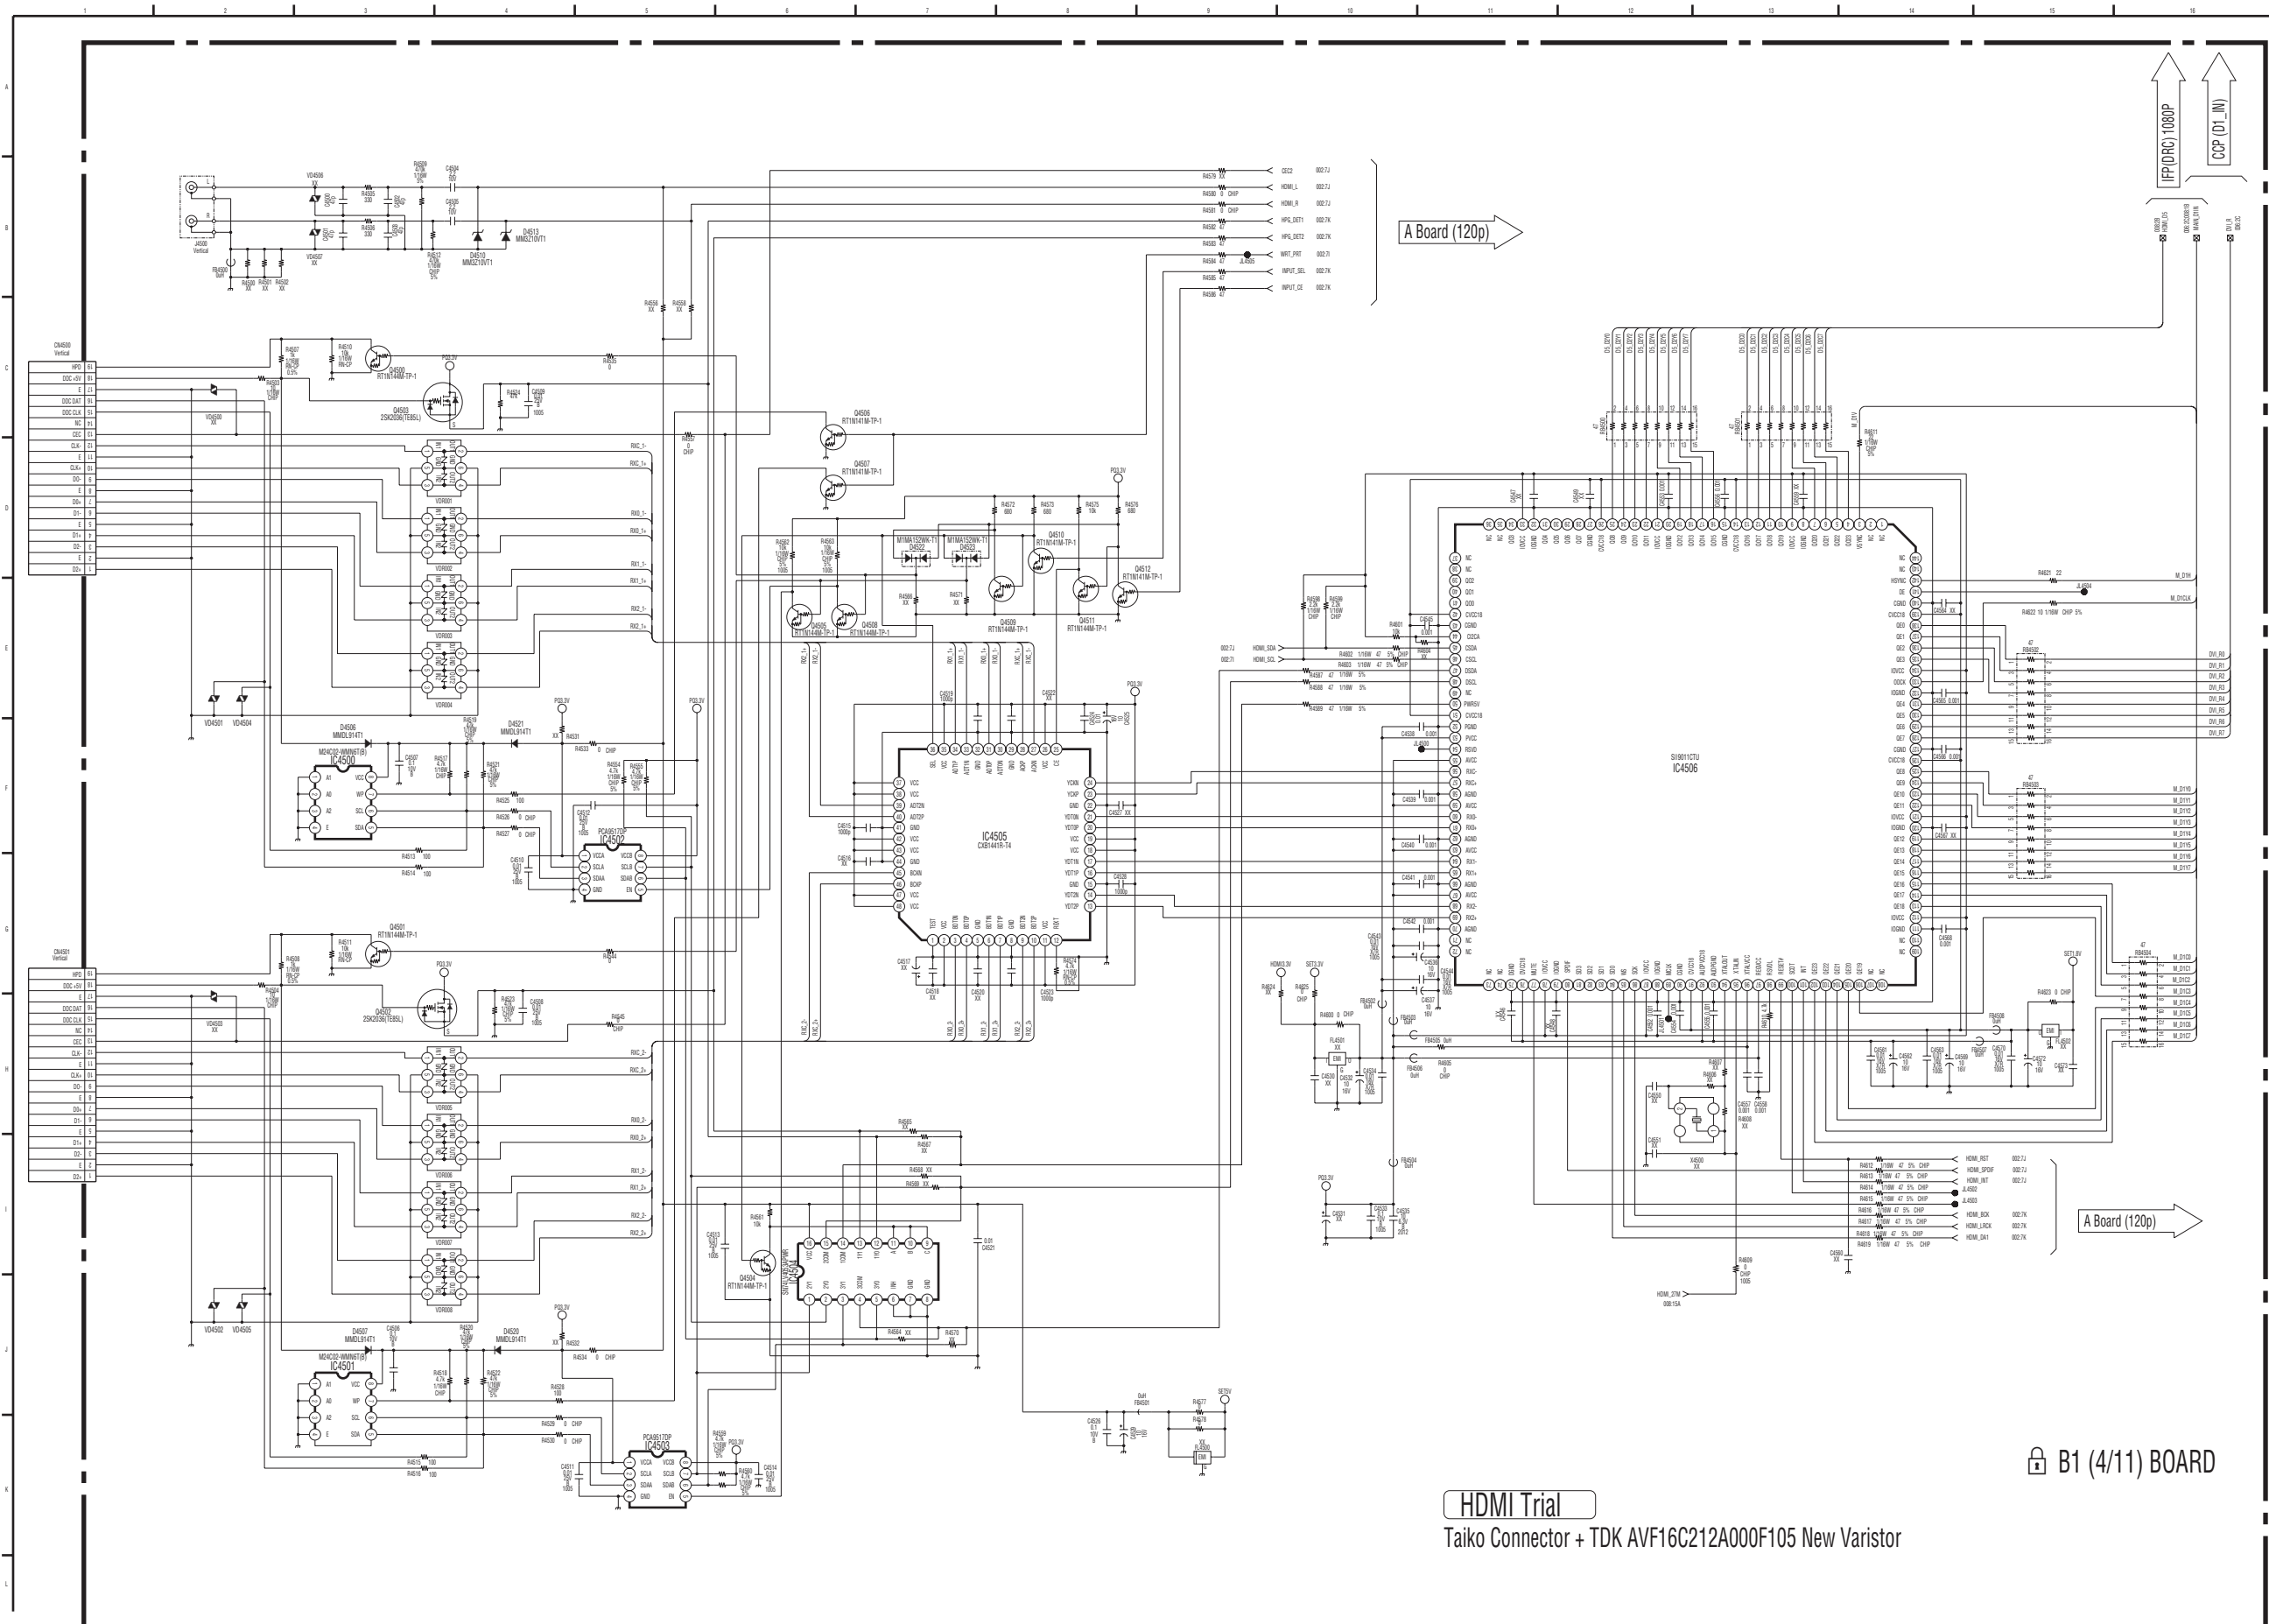


B1 (4/11) BOARD

HDMI Trial  
Taiko Connector + TDK AVF16C212A000F105 New Varistor




(11) Schematic Diagram of B1 (5/11) Board

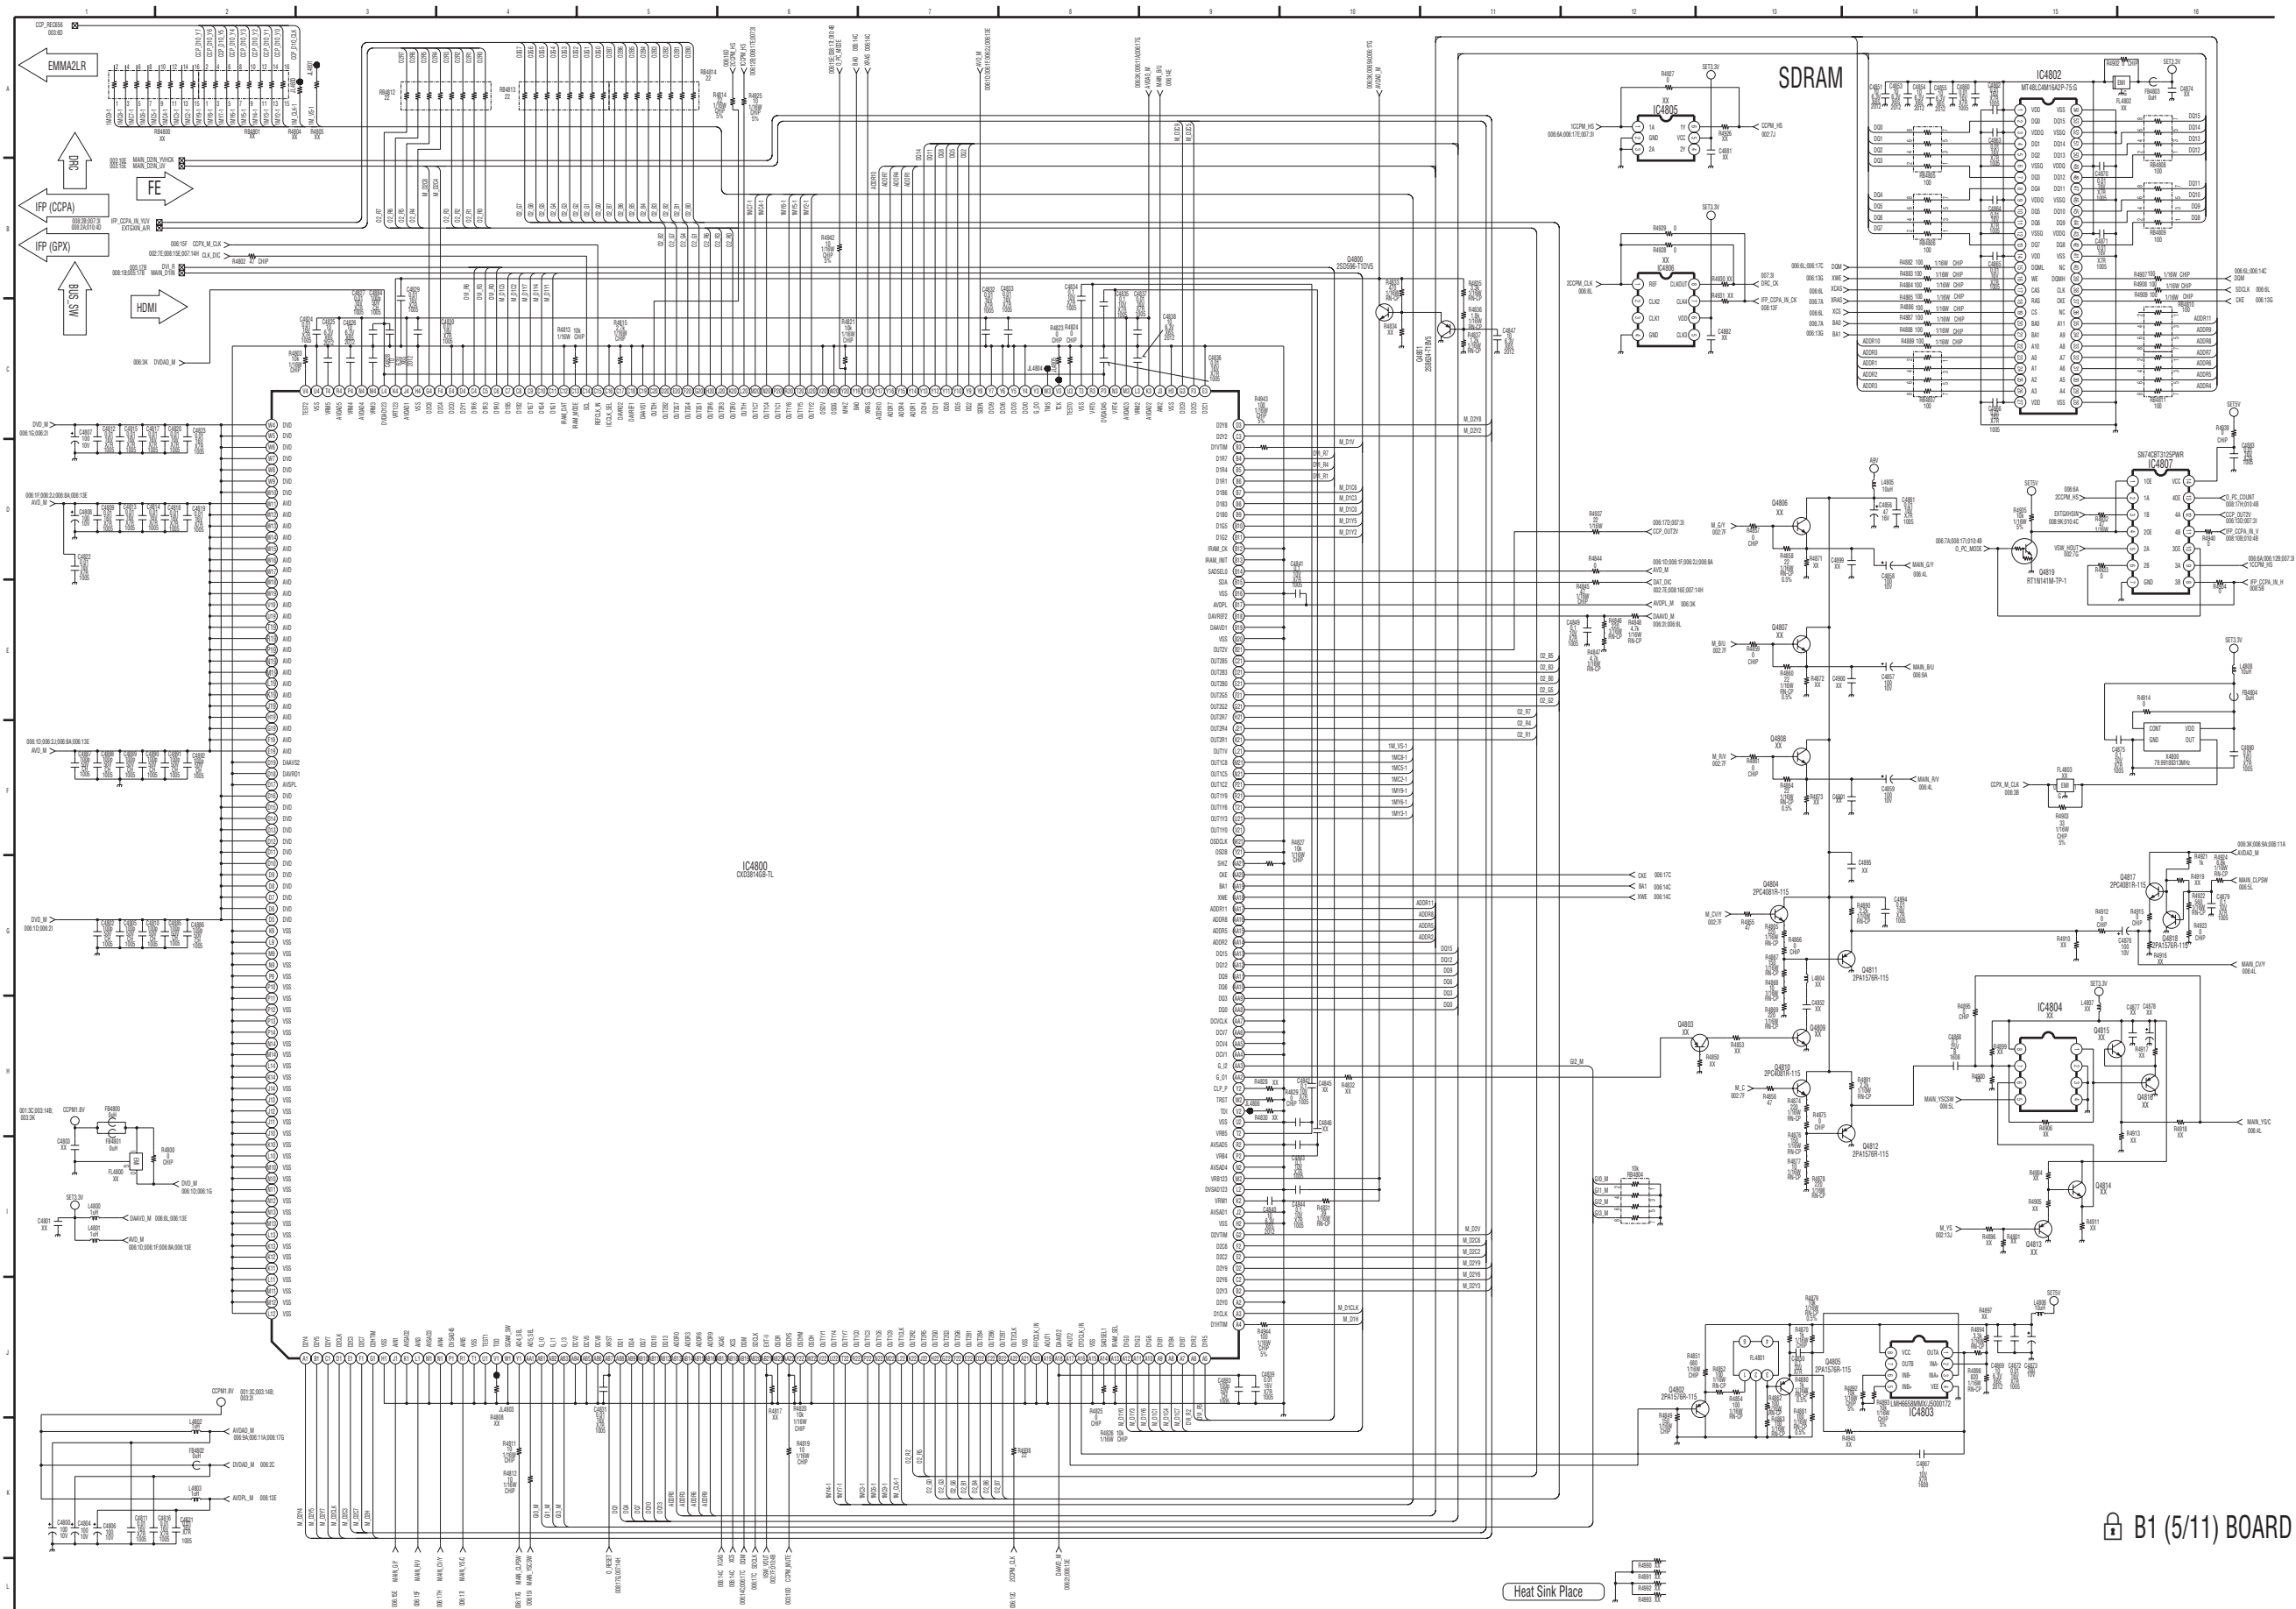


B1 (5/11) BOARD

(12) Schematic Diagram of B1 (6/11) Board

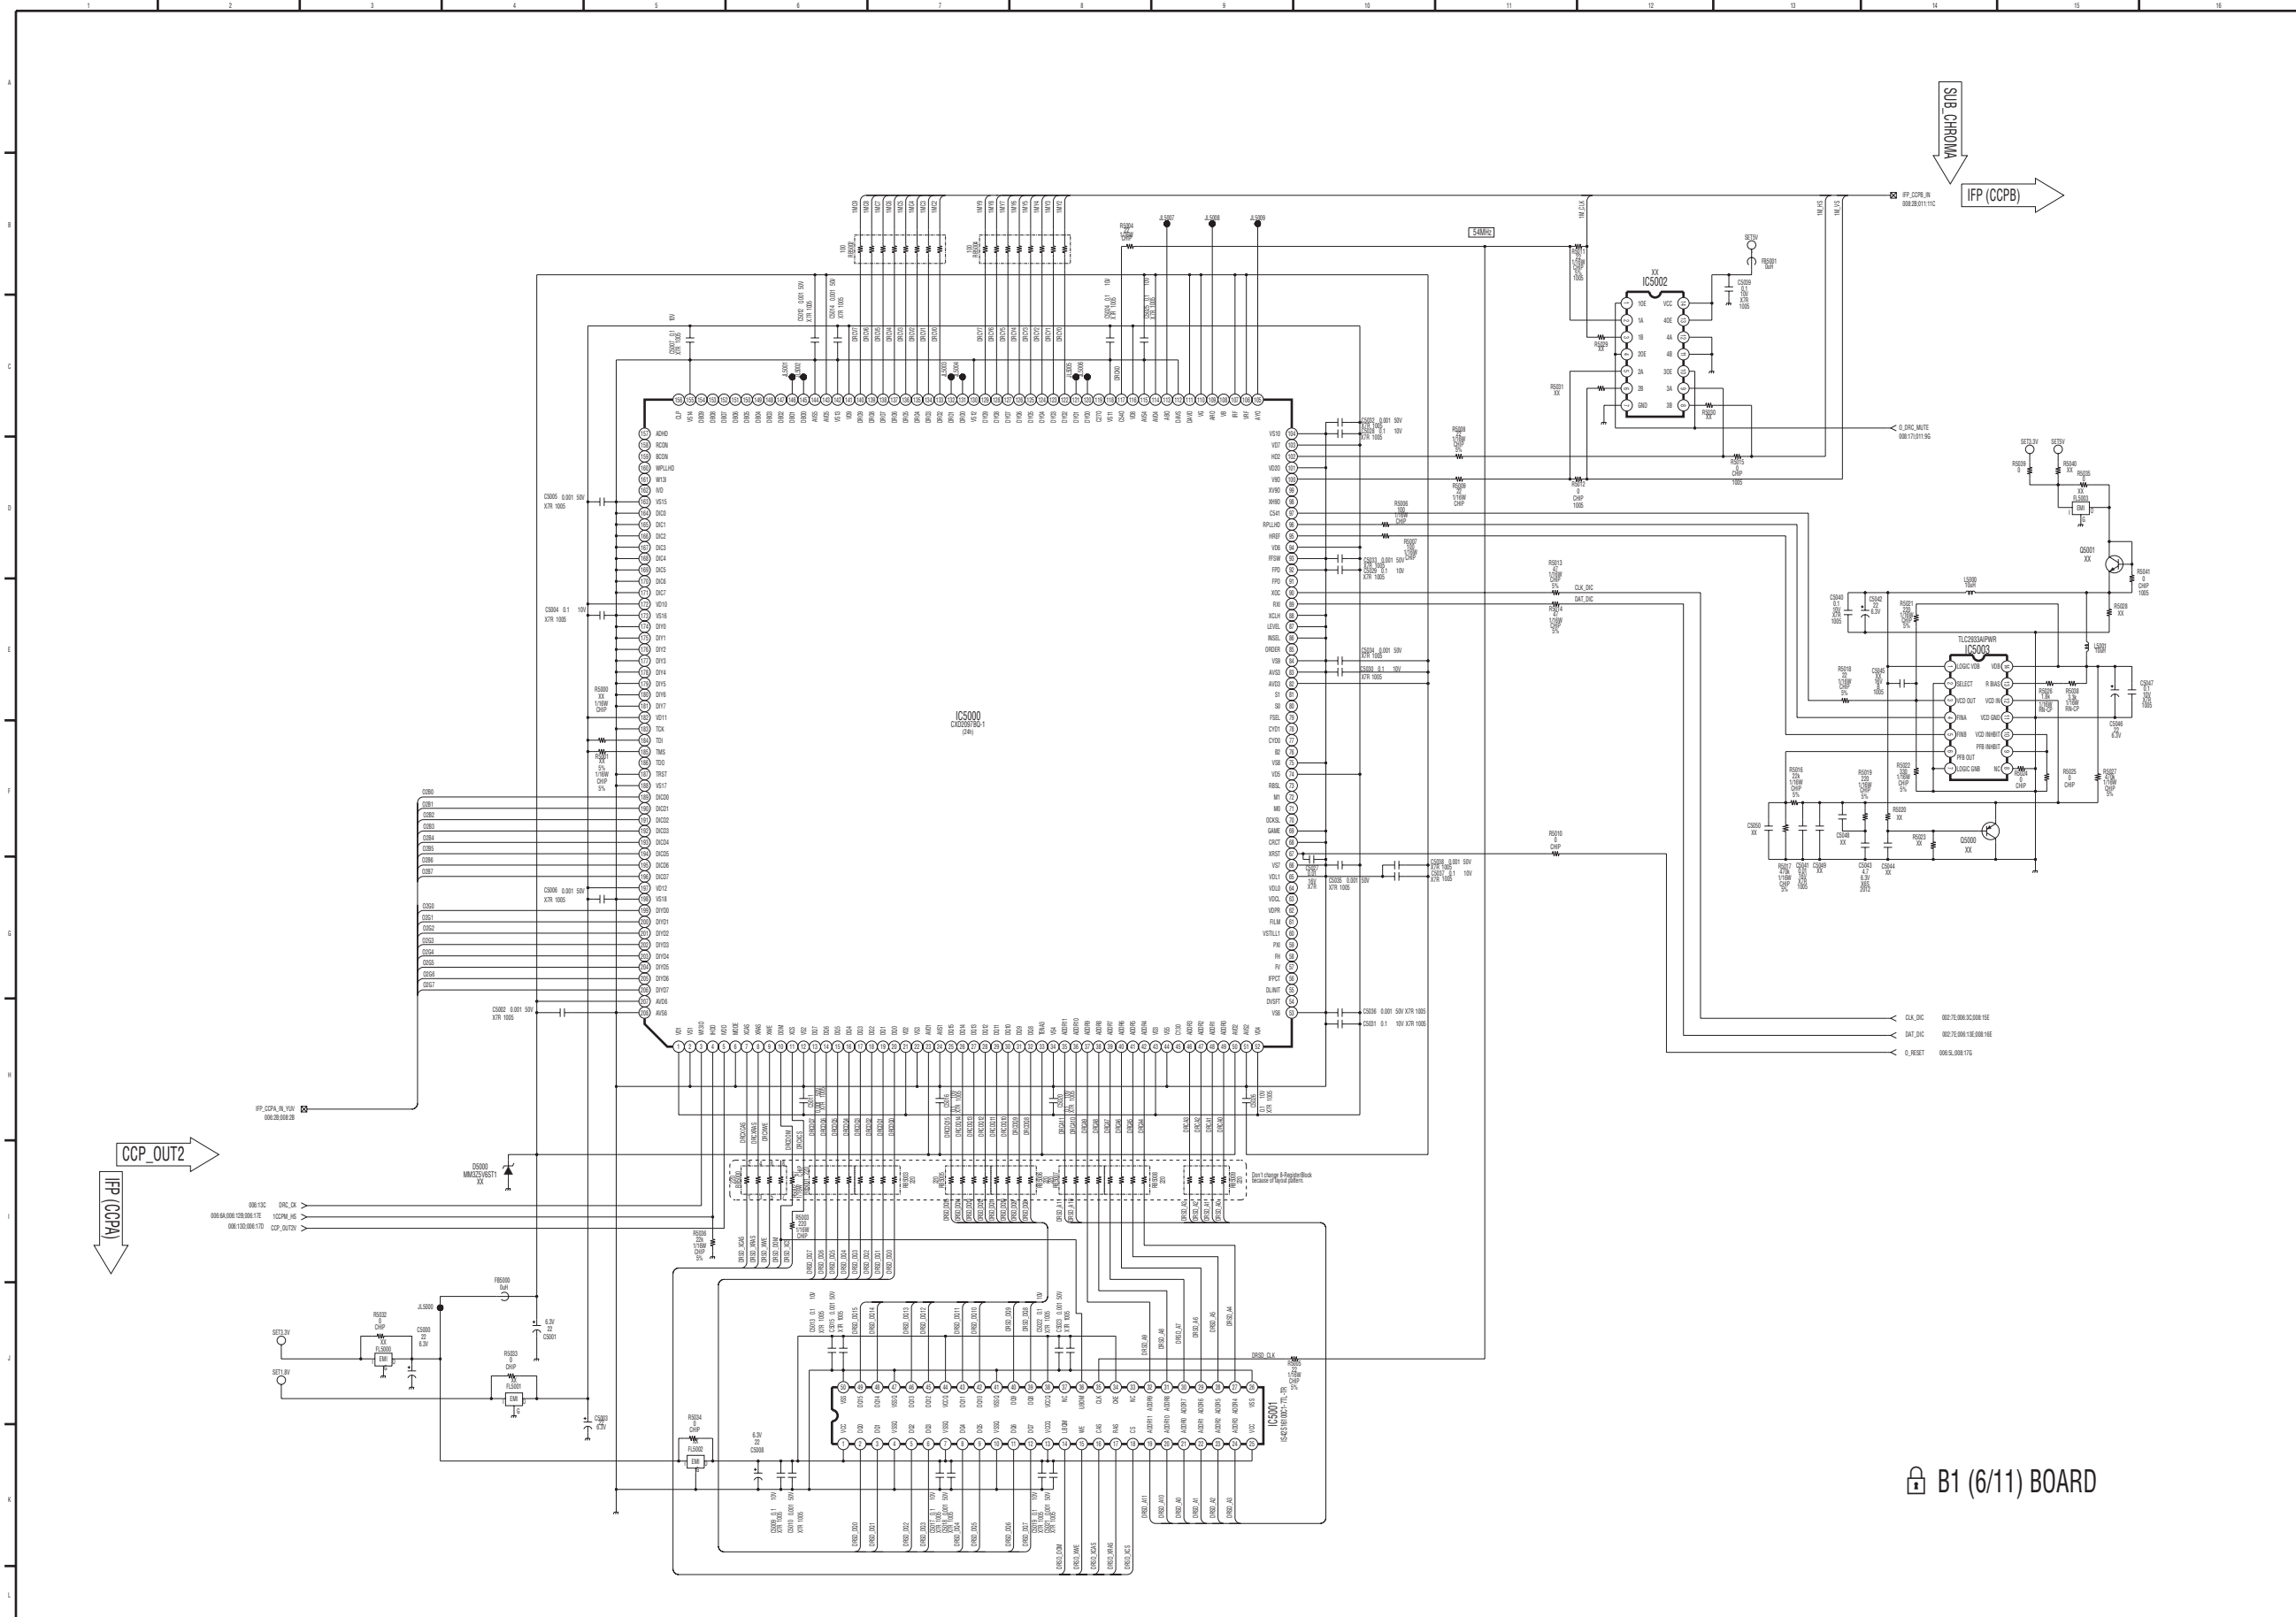


B1 (6/11) BOARD

(13) Schematic Diagram of B1 (7/11) Board

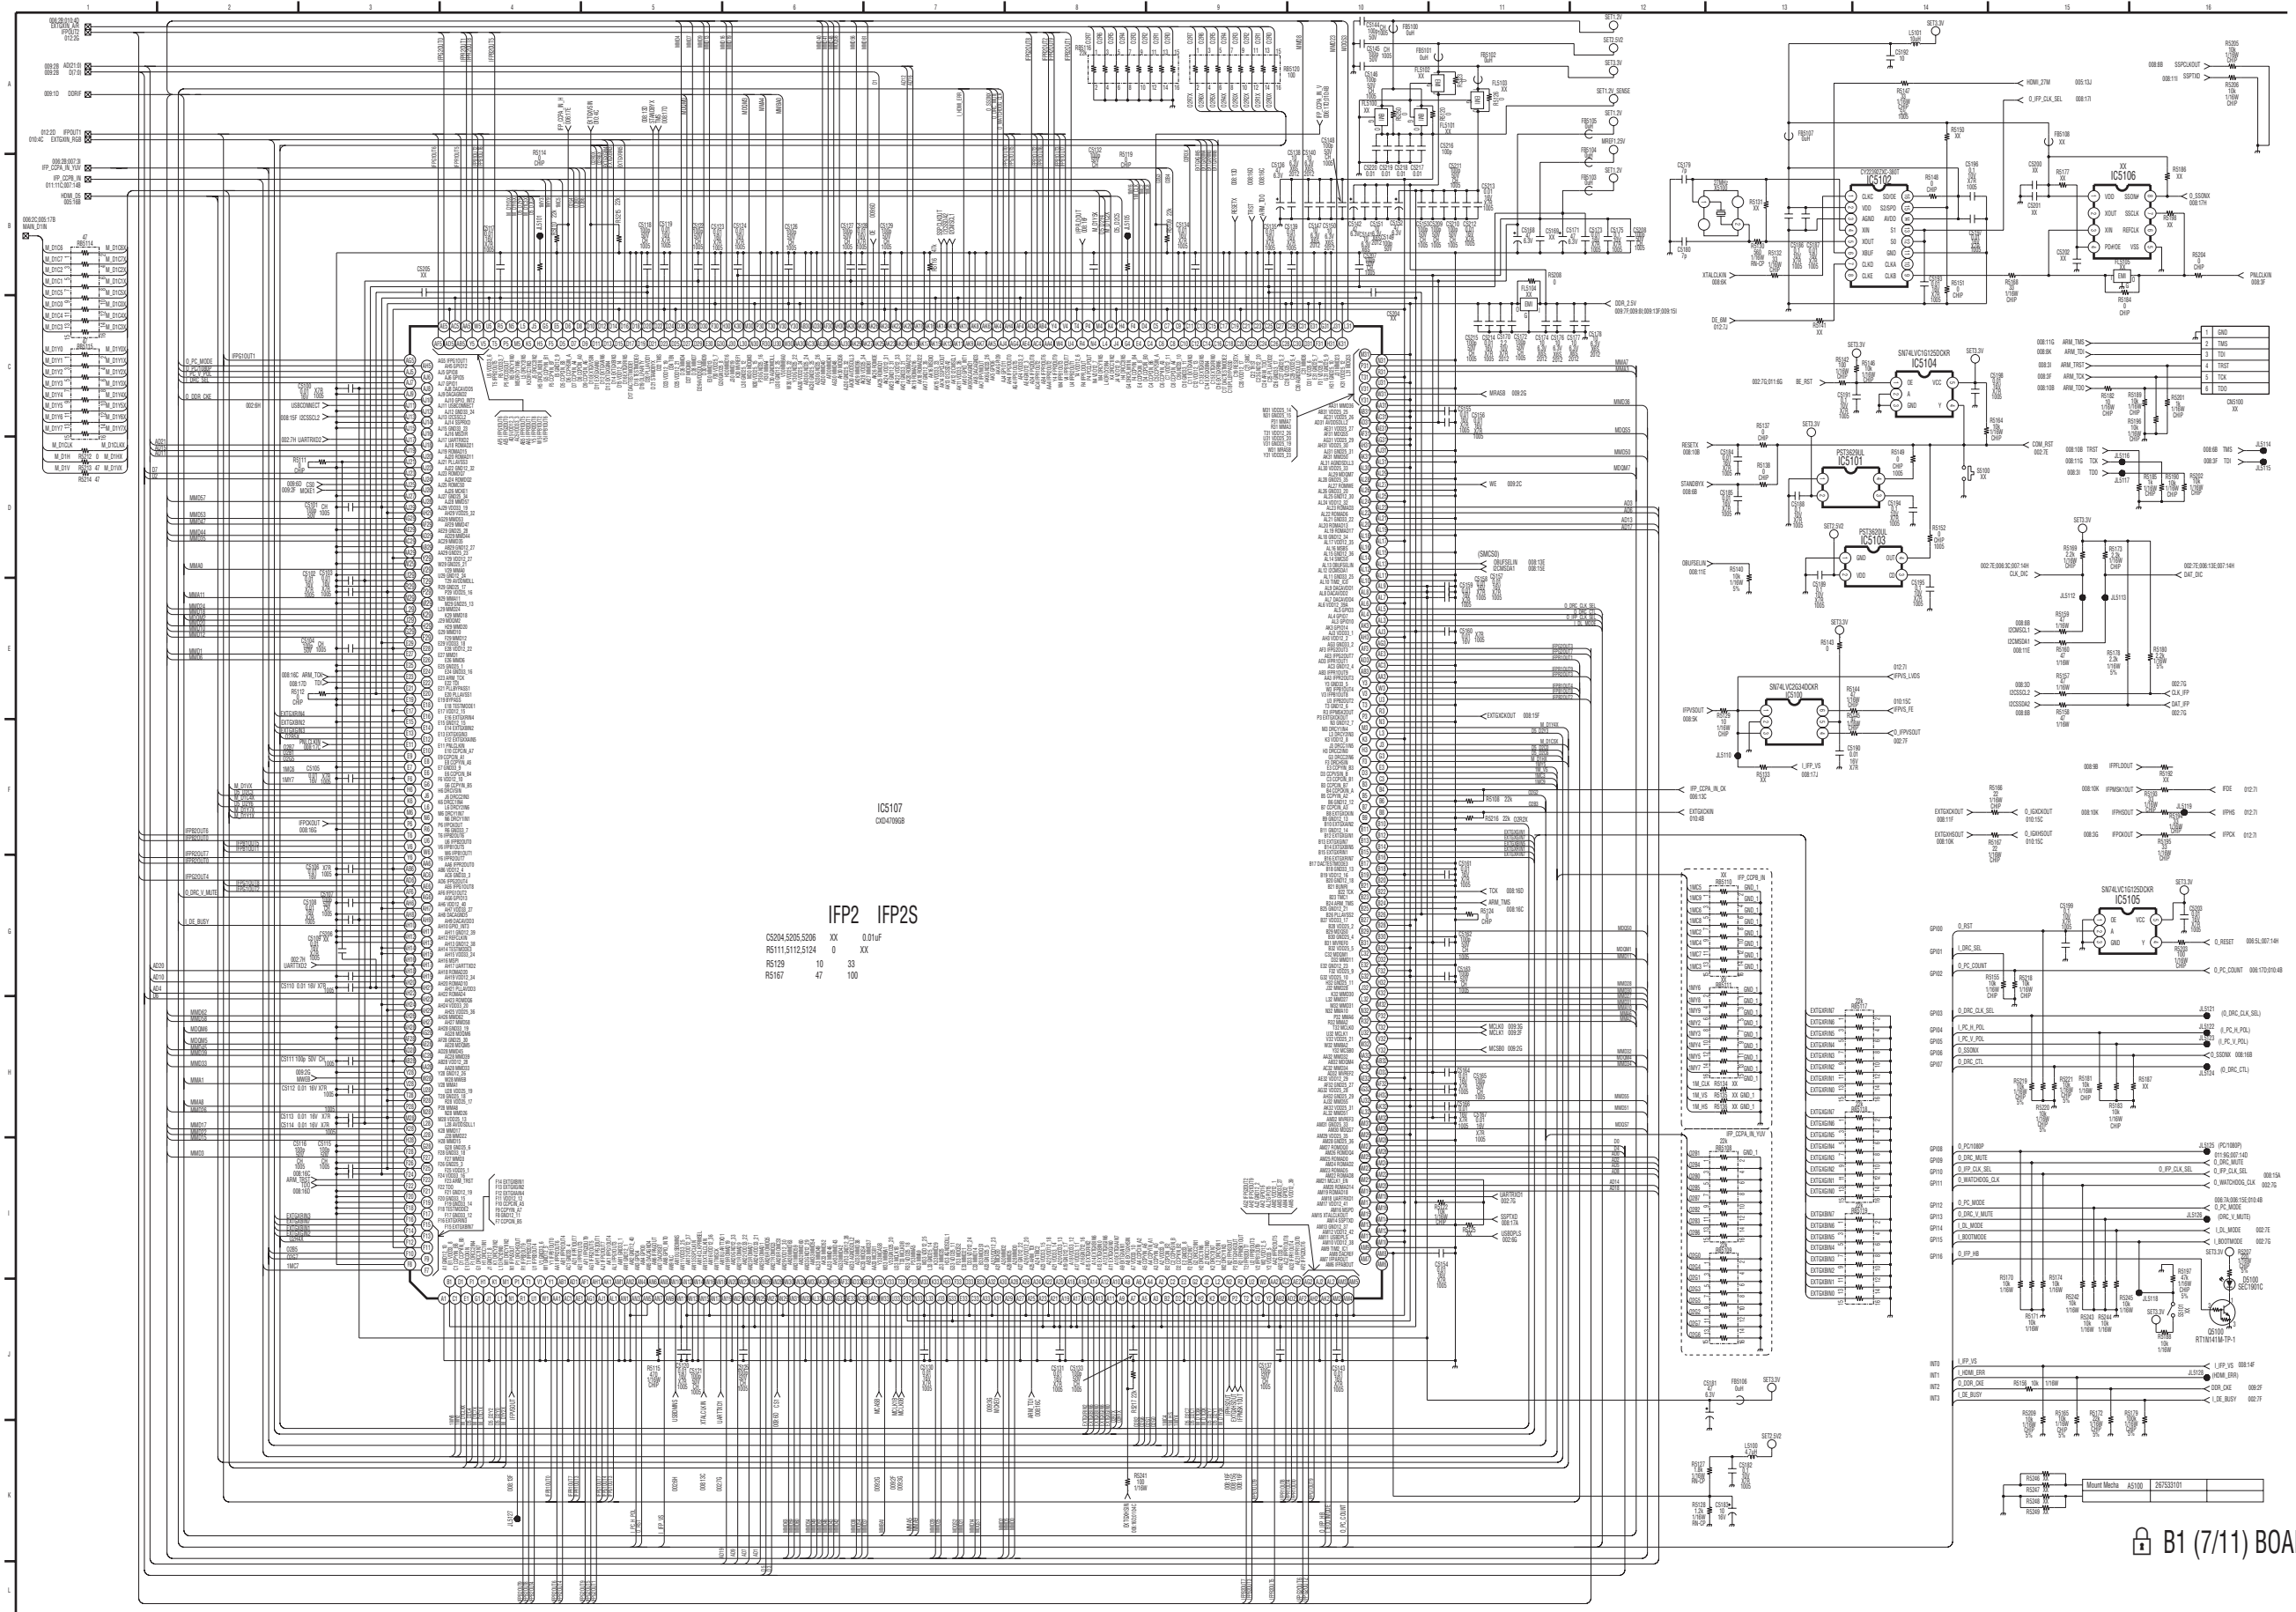


B1 (7/11) BOARD

(14) Schematic Diagram of B1 (8/11) Board

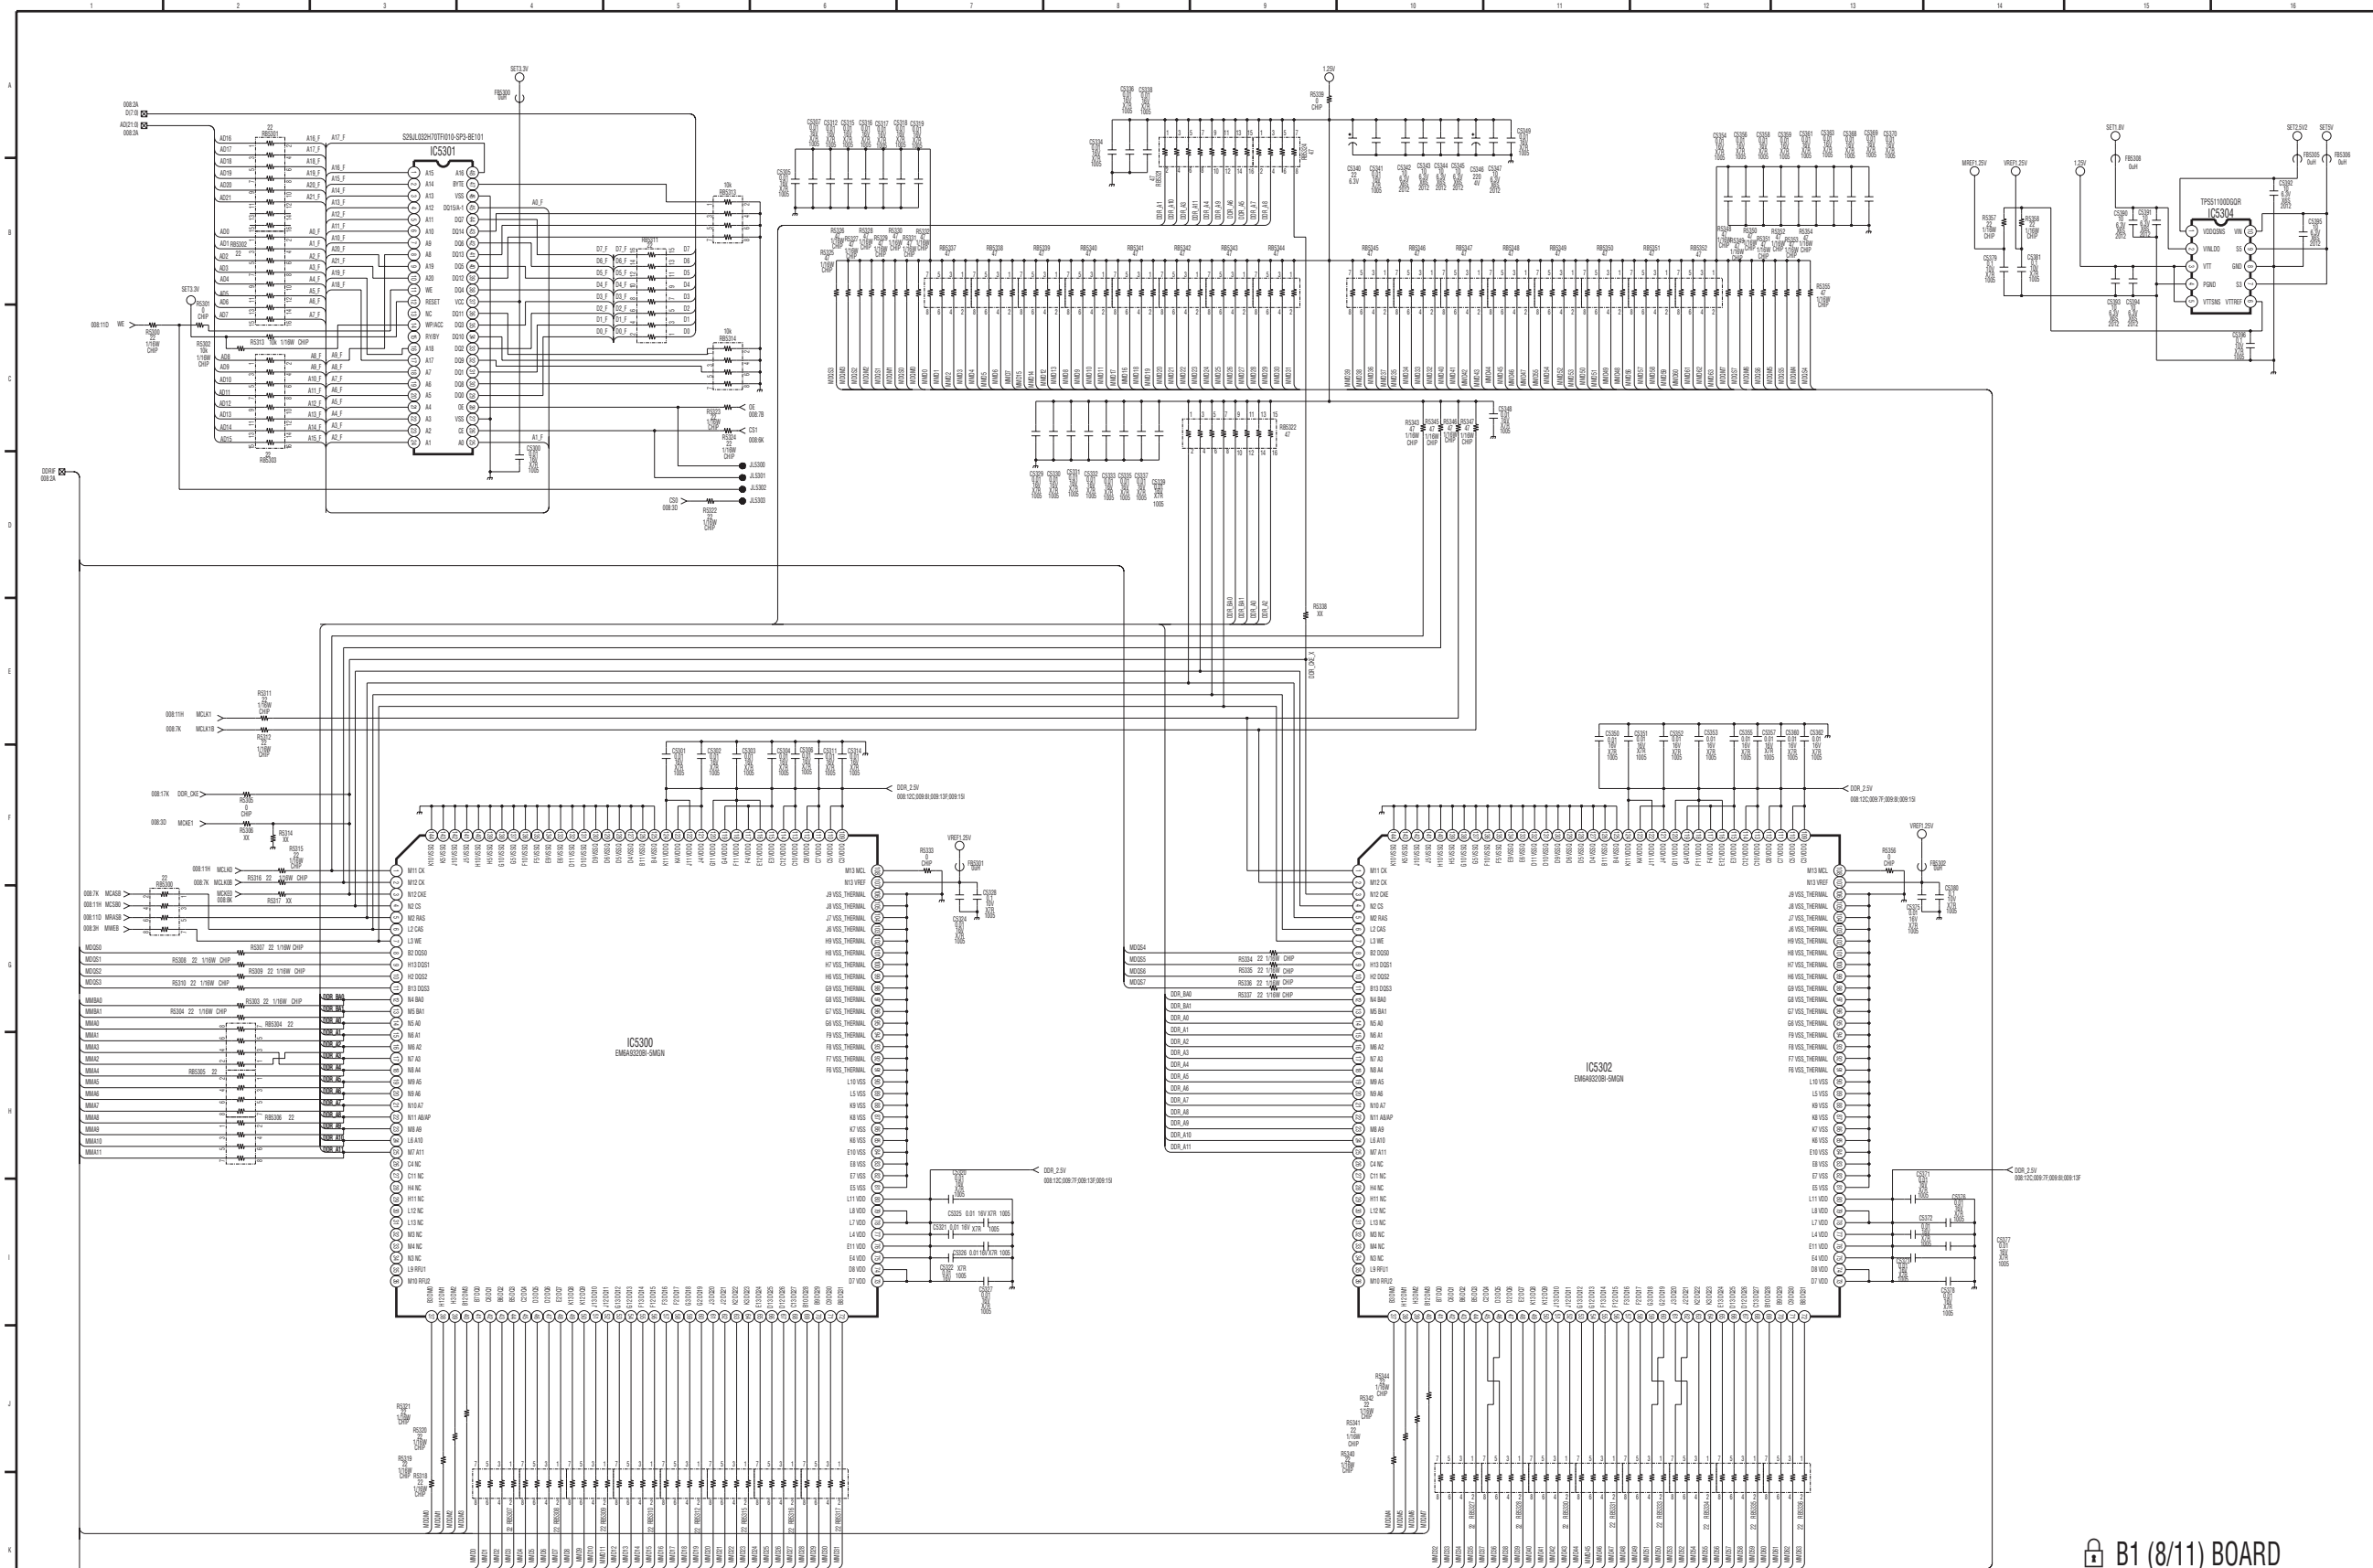


B1 (8/11) BOARD

(15) Schematic Diagram of B1 (9/11) Board

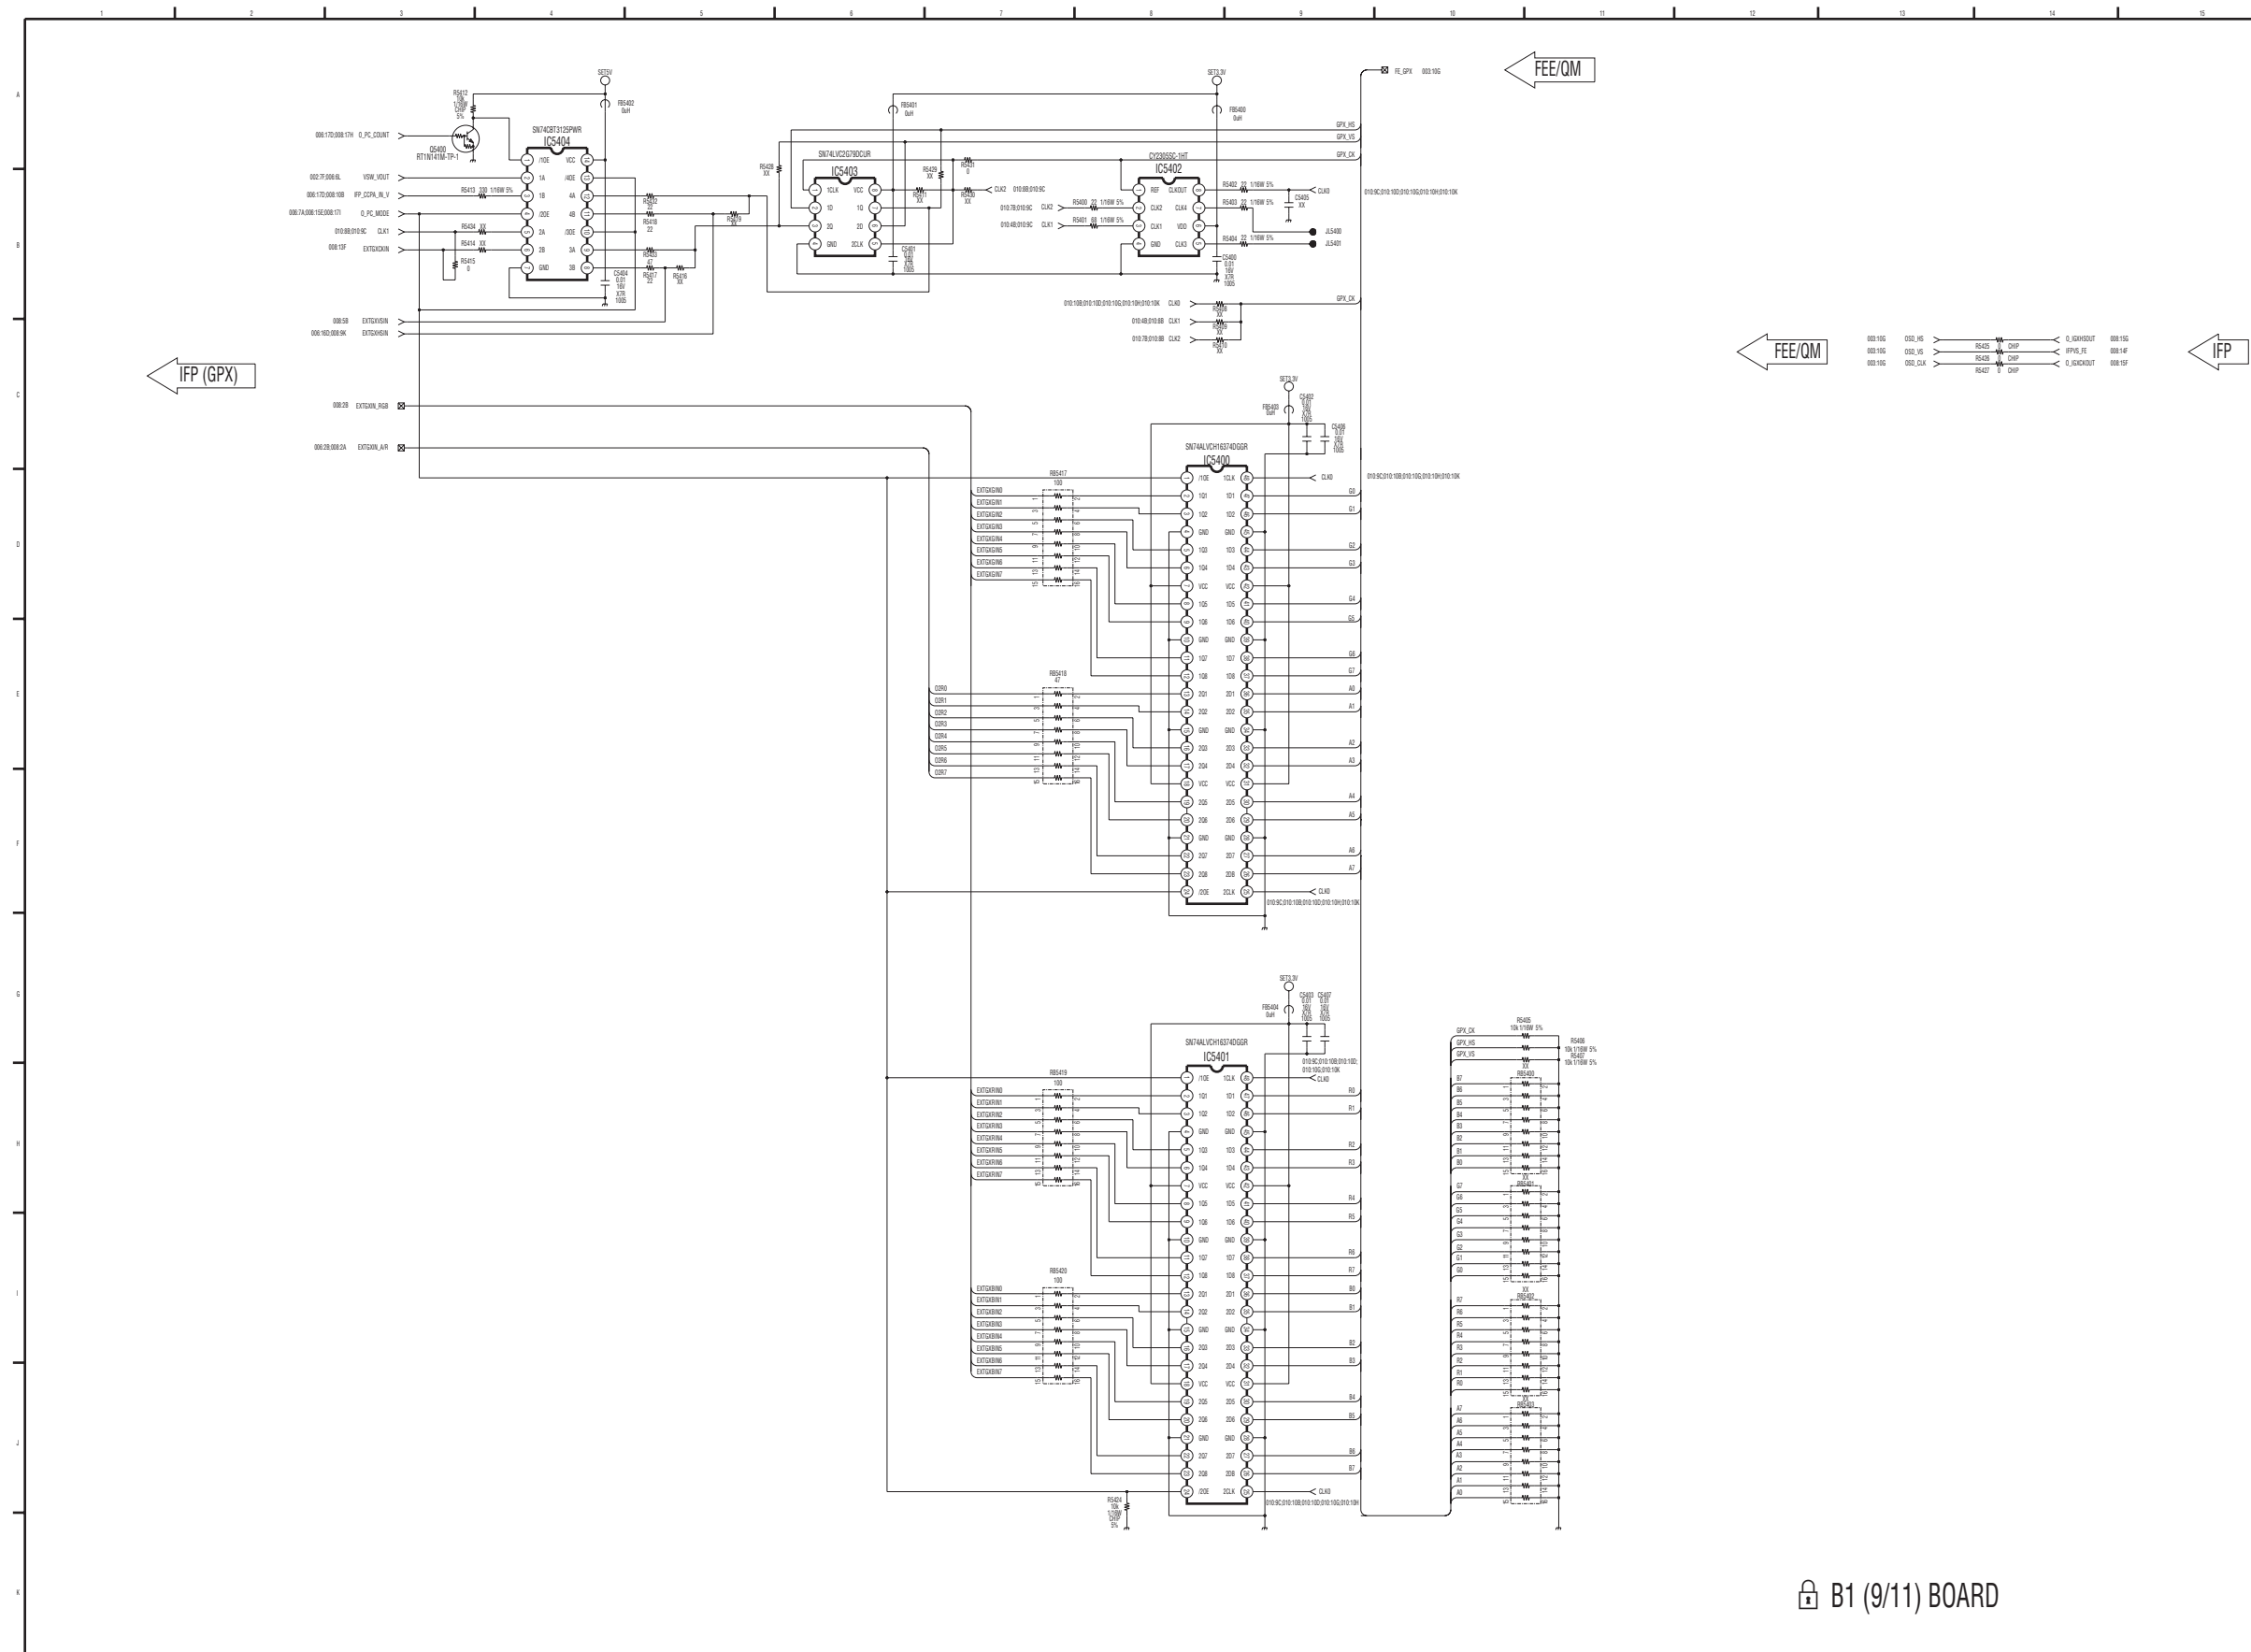


B1 (9/11) BOARD

(16) Schematic Diagram of B1 (10/11) Board

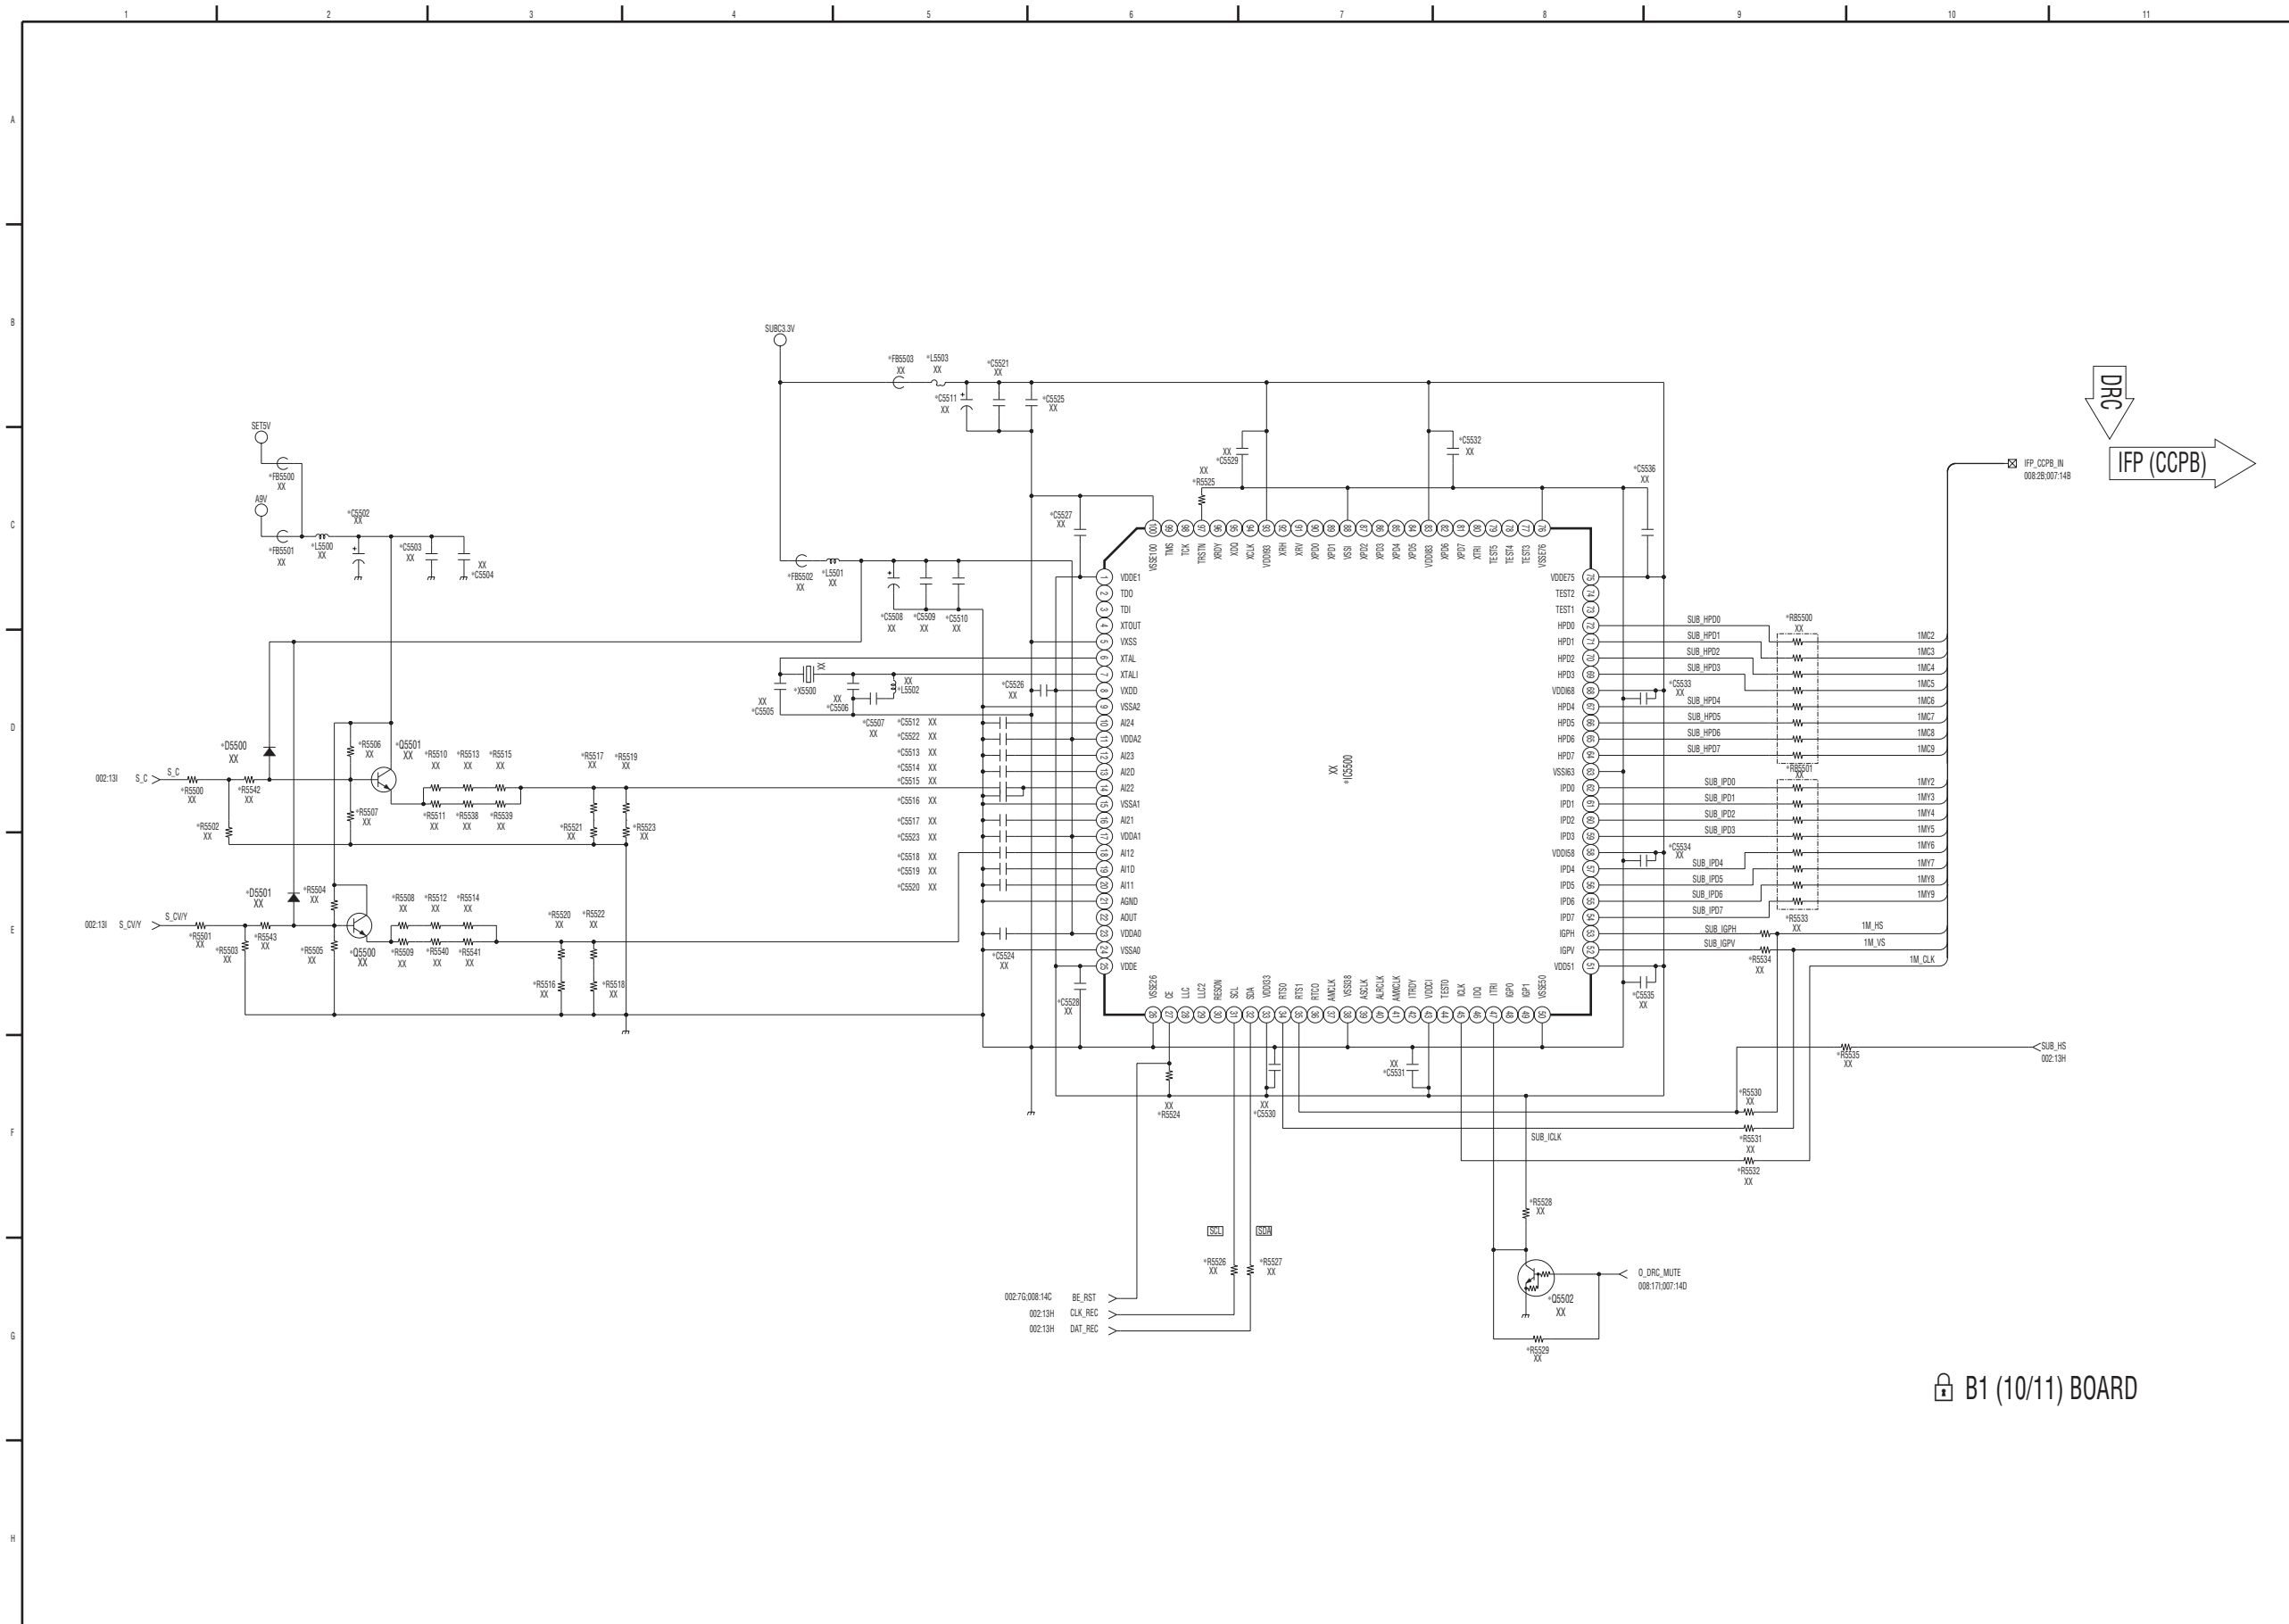


B1 (10/11) BOARD

(17) Schematic Diagram of B1 (11/11) Board

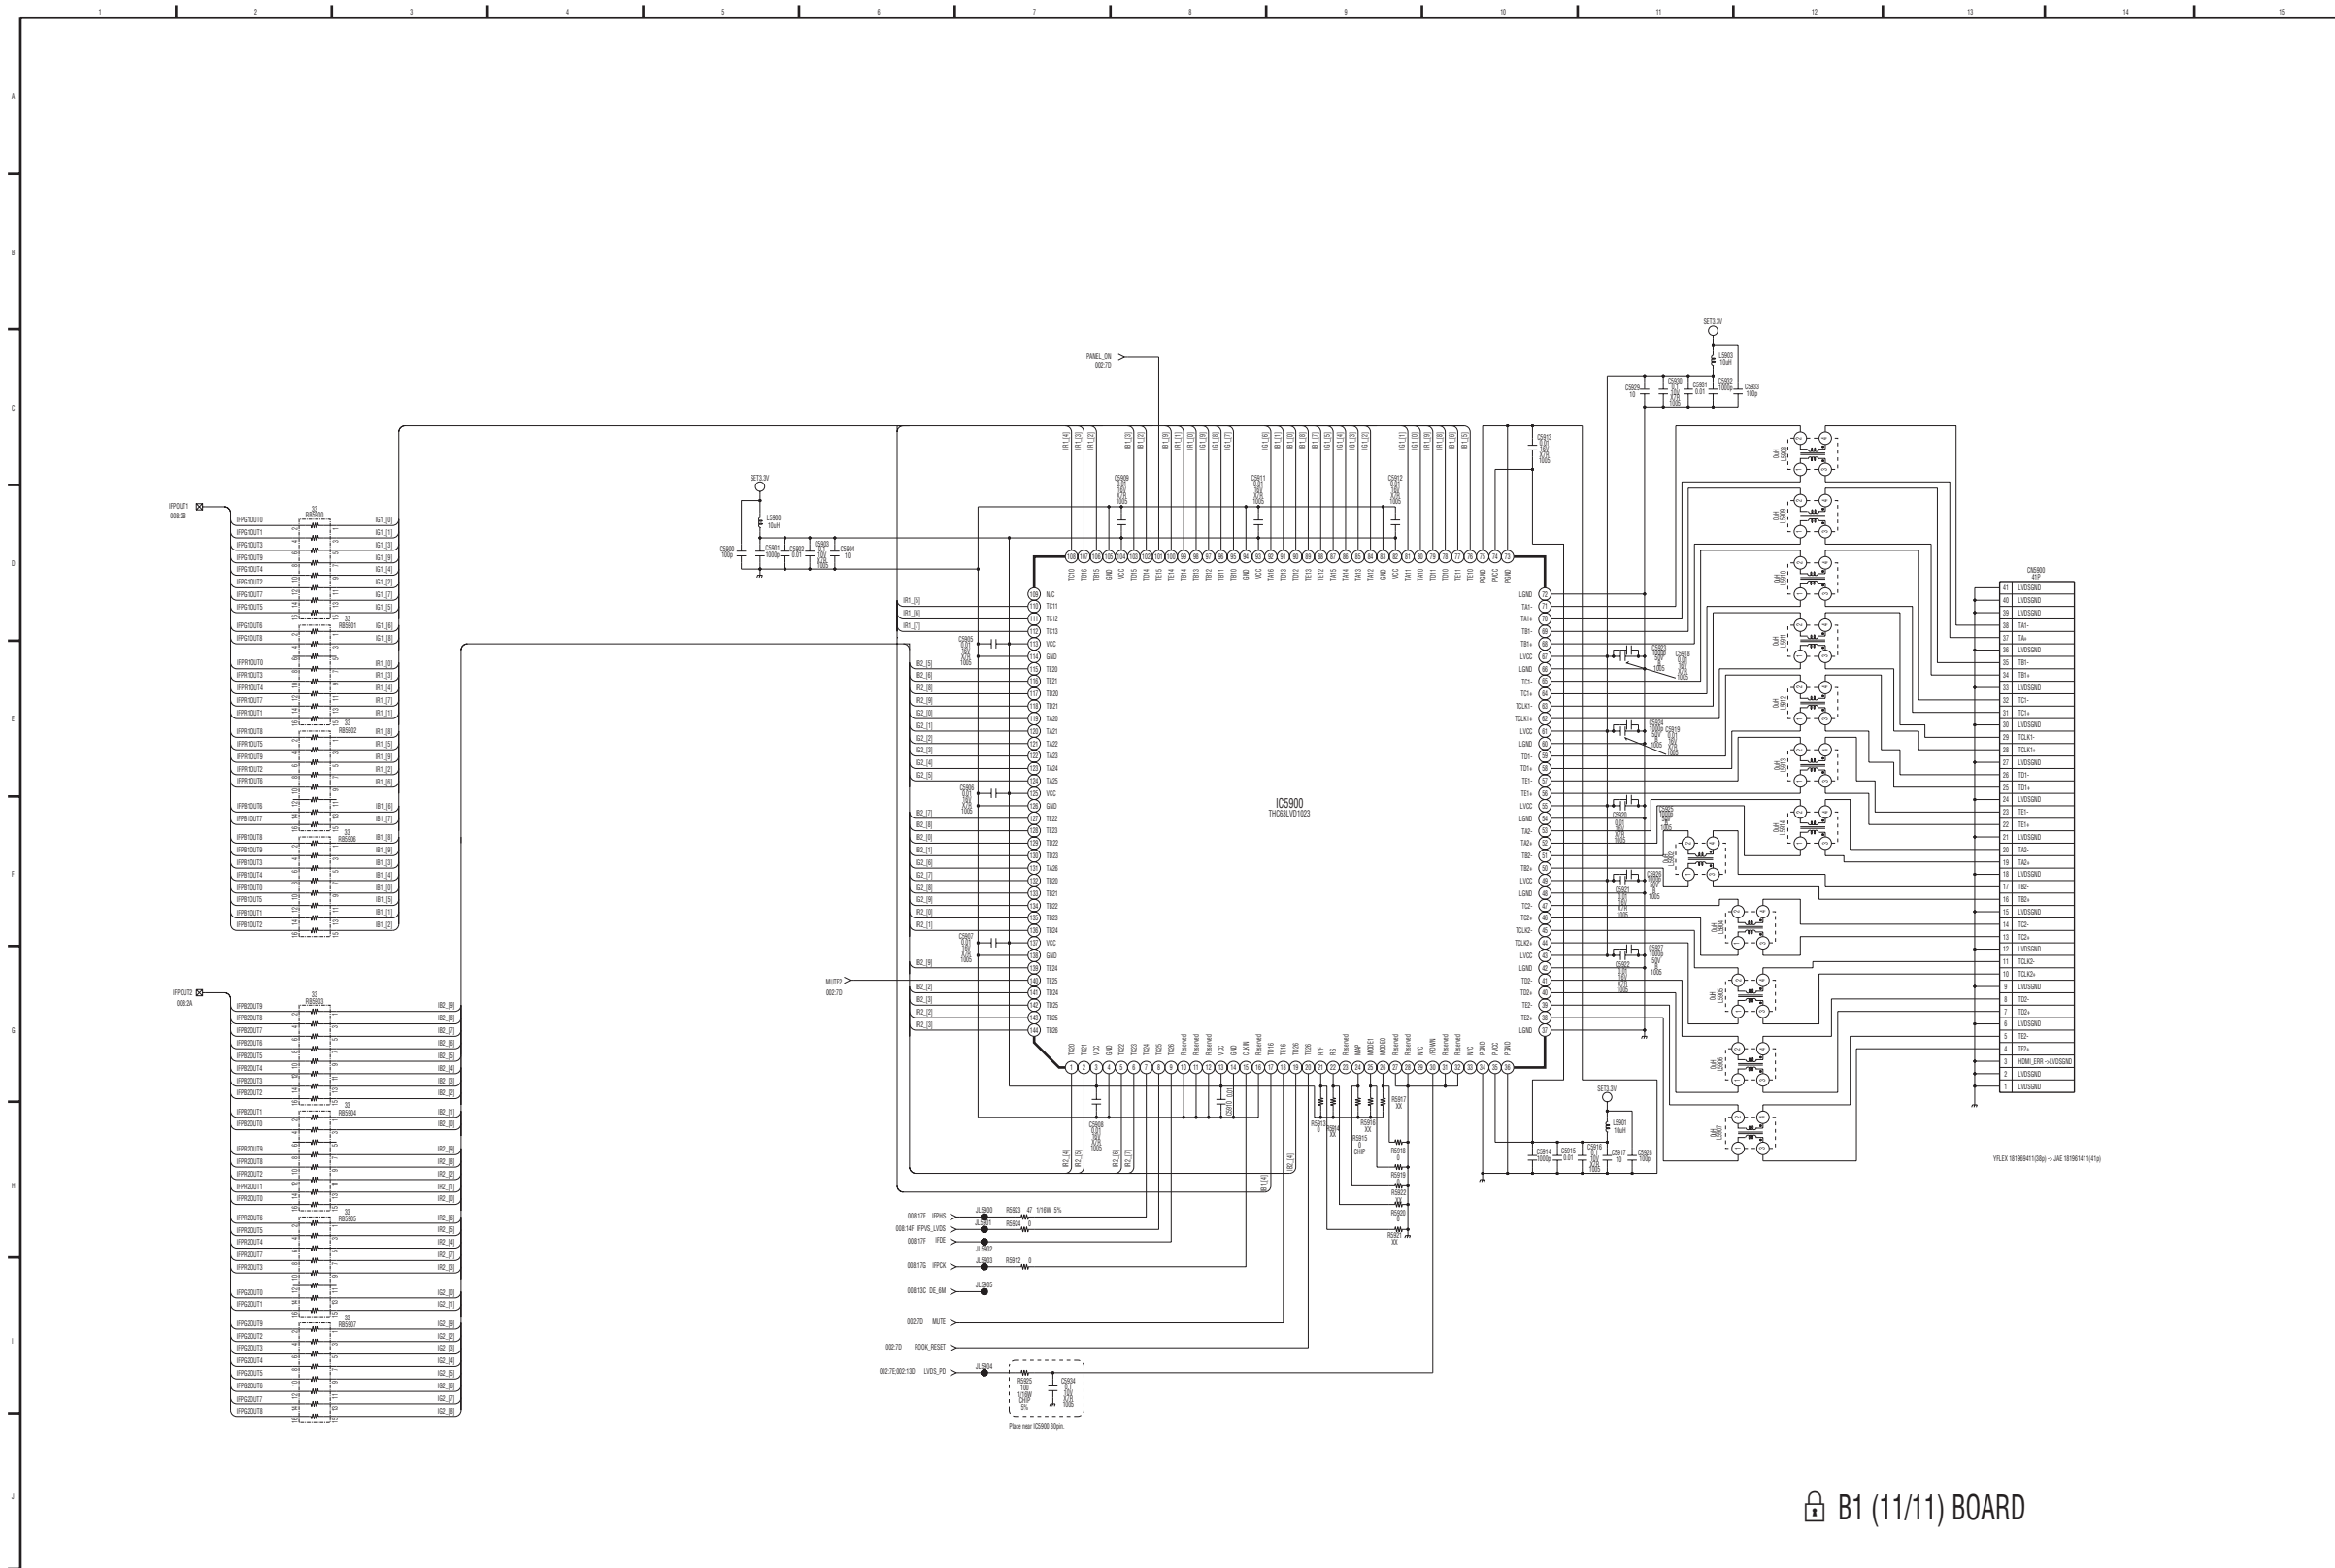

B1 (11/11) BOARD


(18) Schematic Diagram of C (1/11) Board

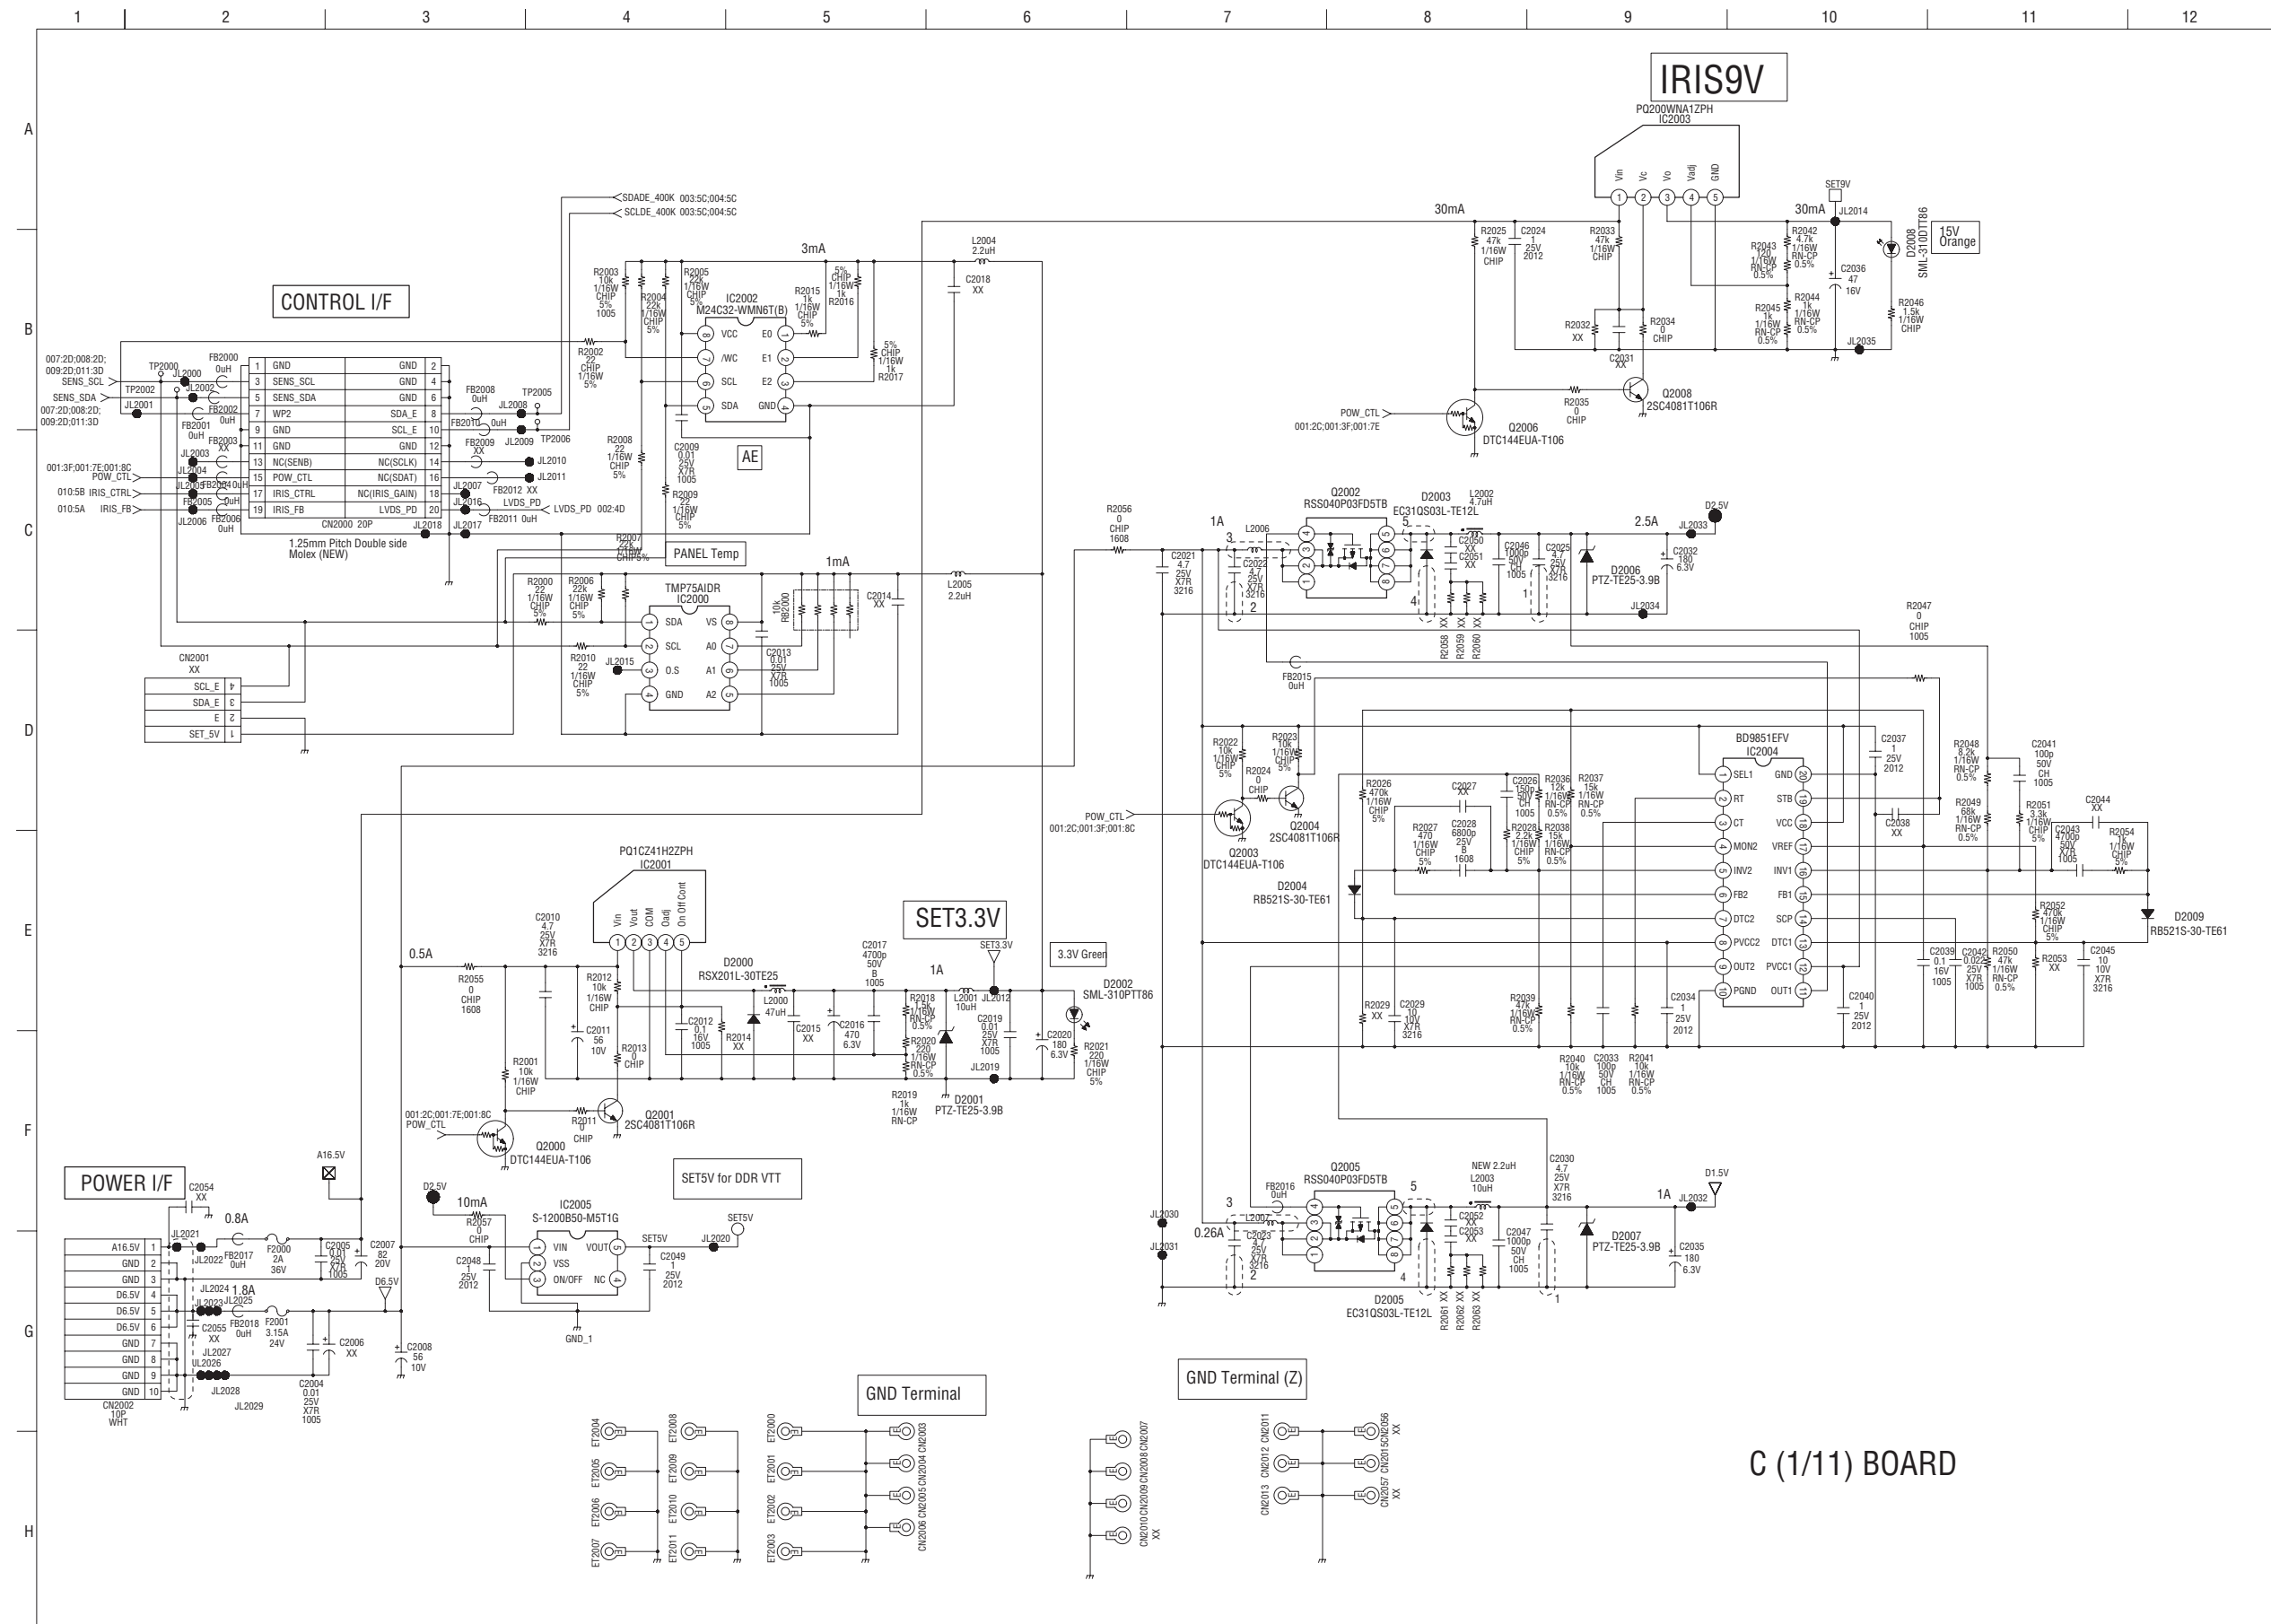

C (1/11) BOARD




(19) Schematic Diagram of C (2/11) Board

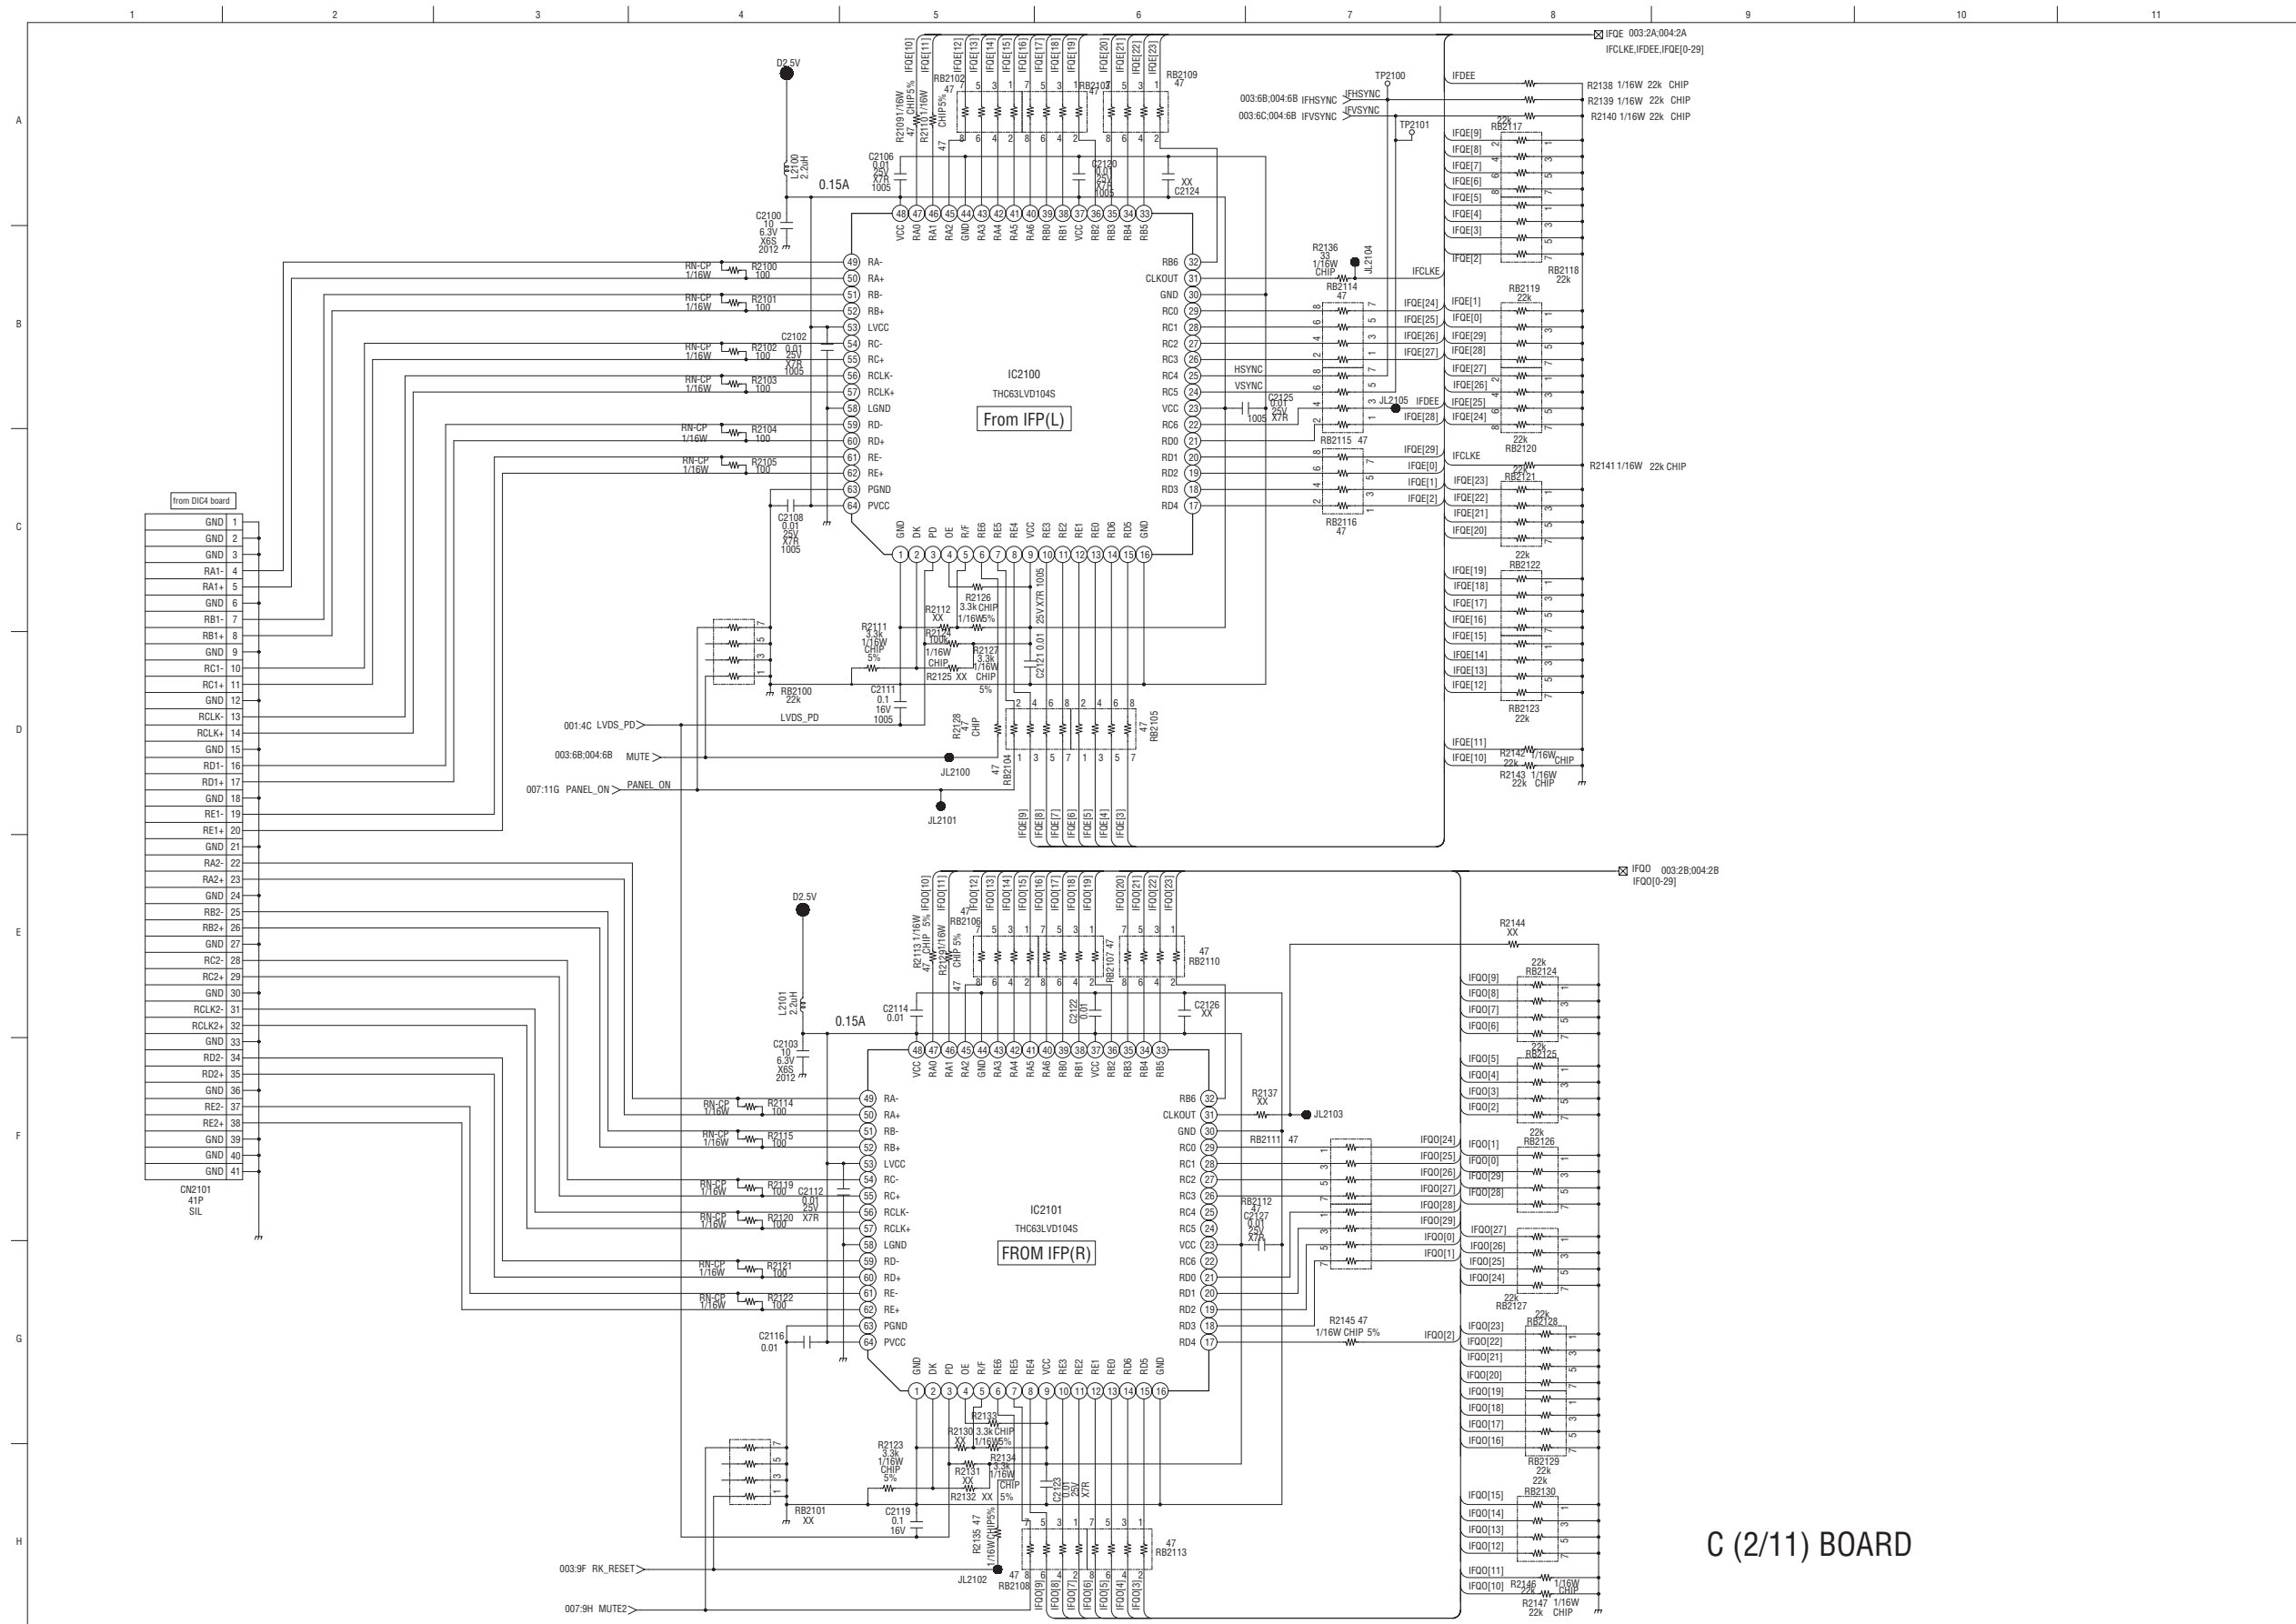


C (2/11) BOARD

(20) Schematic Diagram of C (3/11) Board

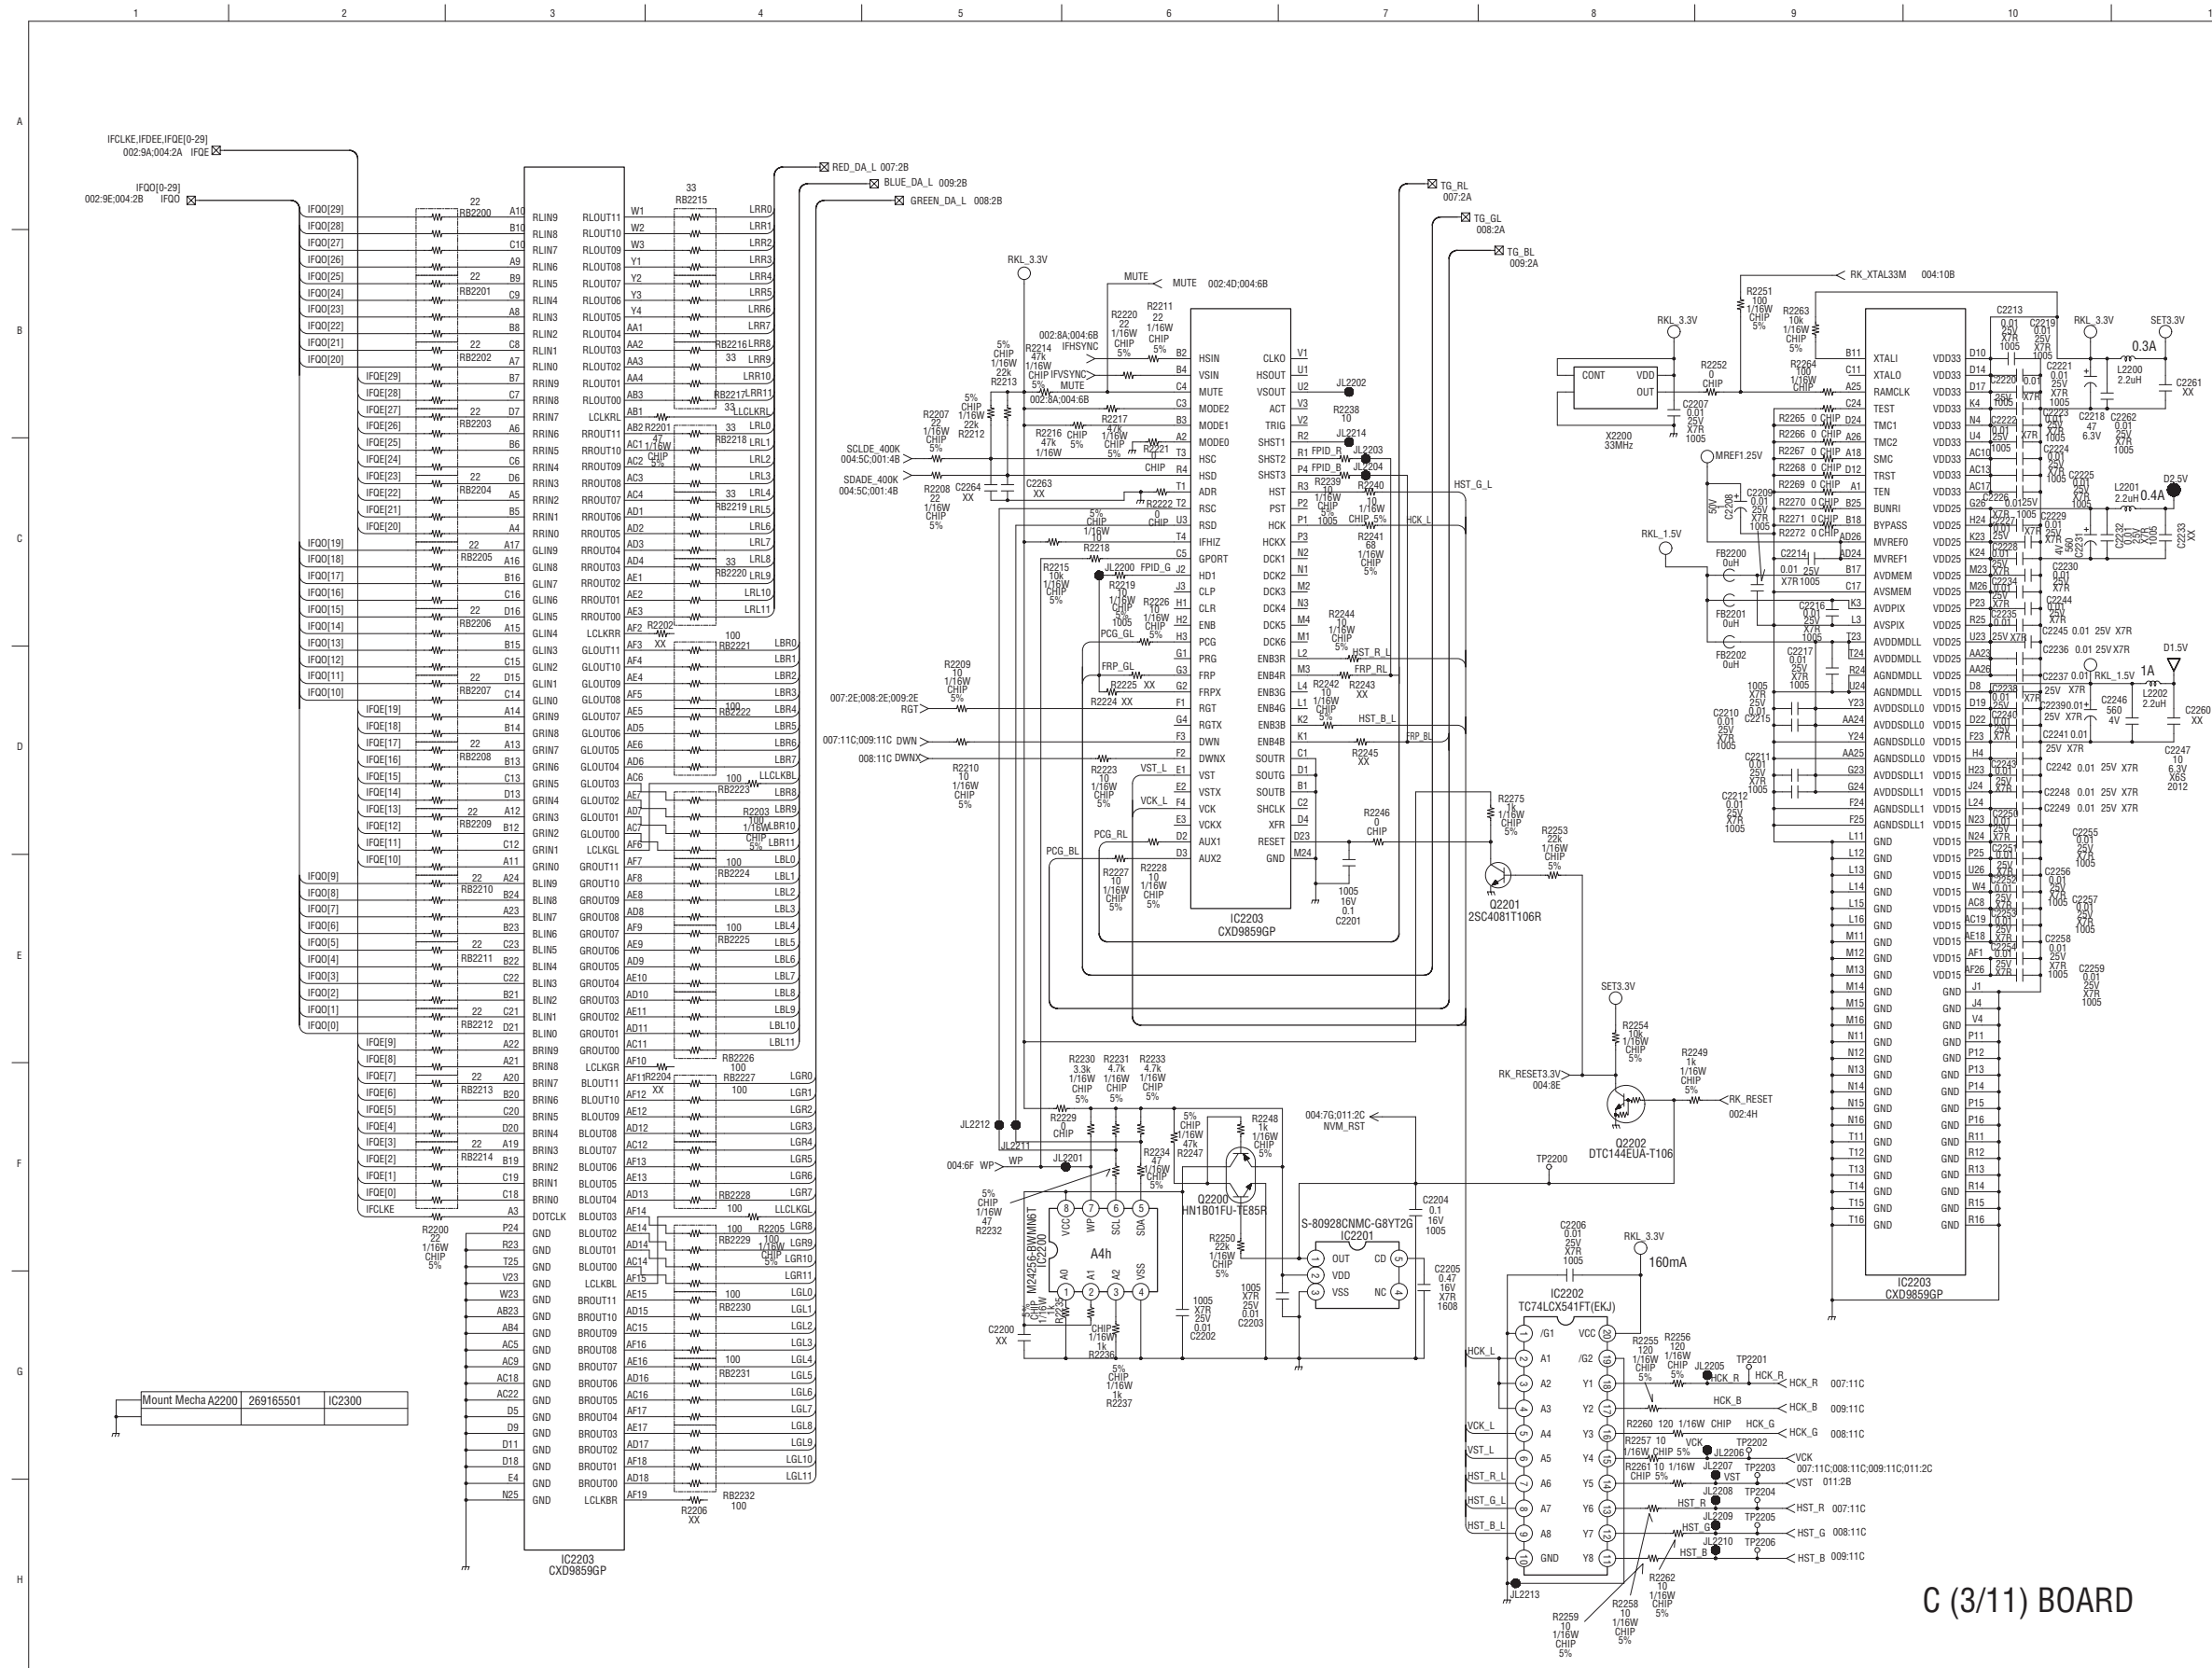

C (3/11) BOARD


(21) Schematic Diagram of C (4/11) Board

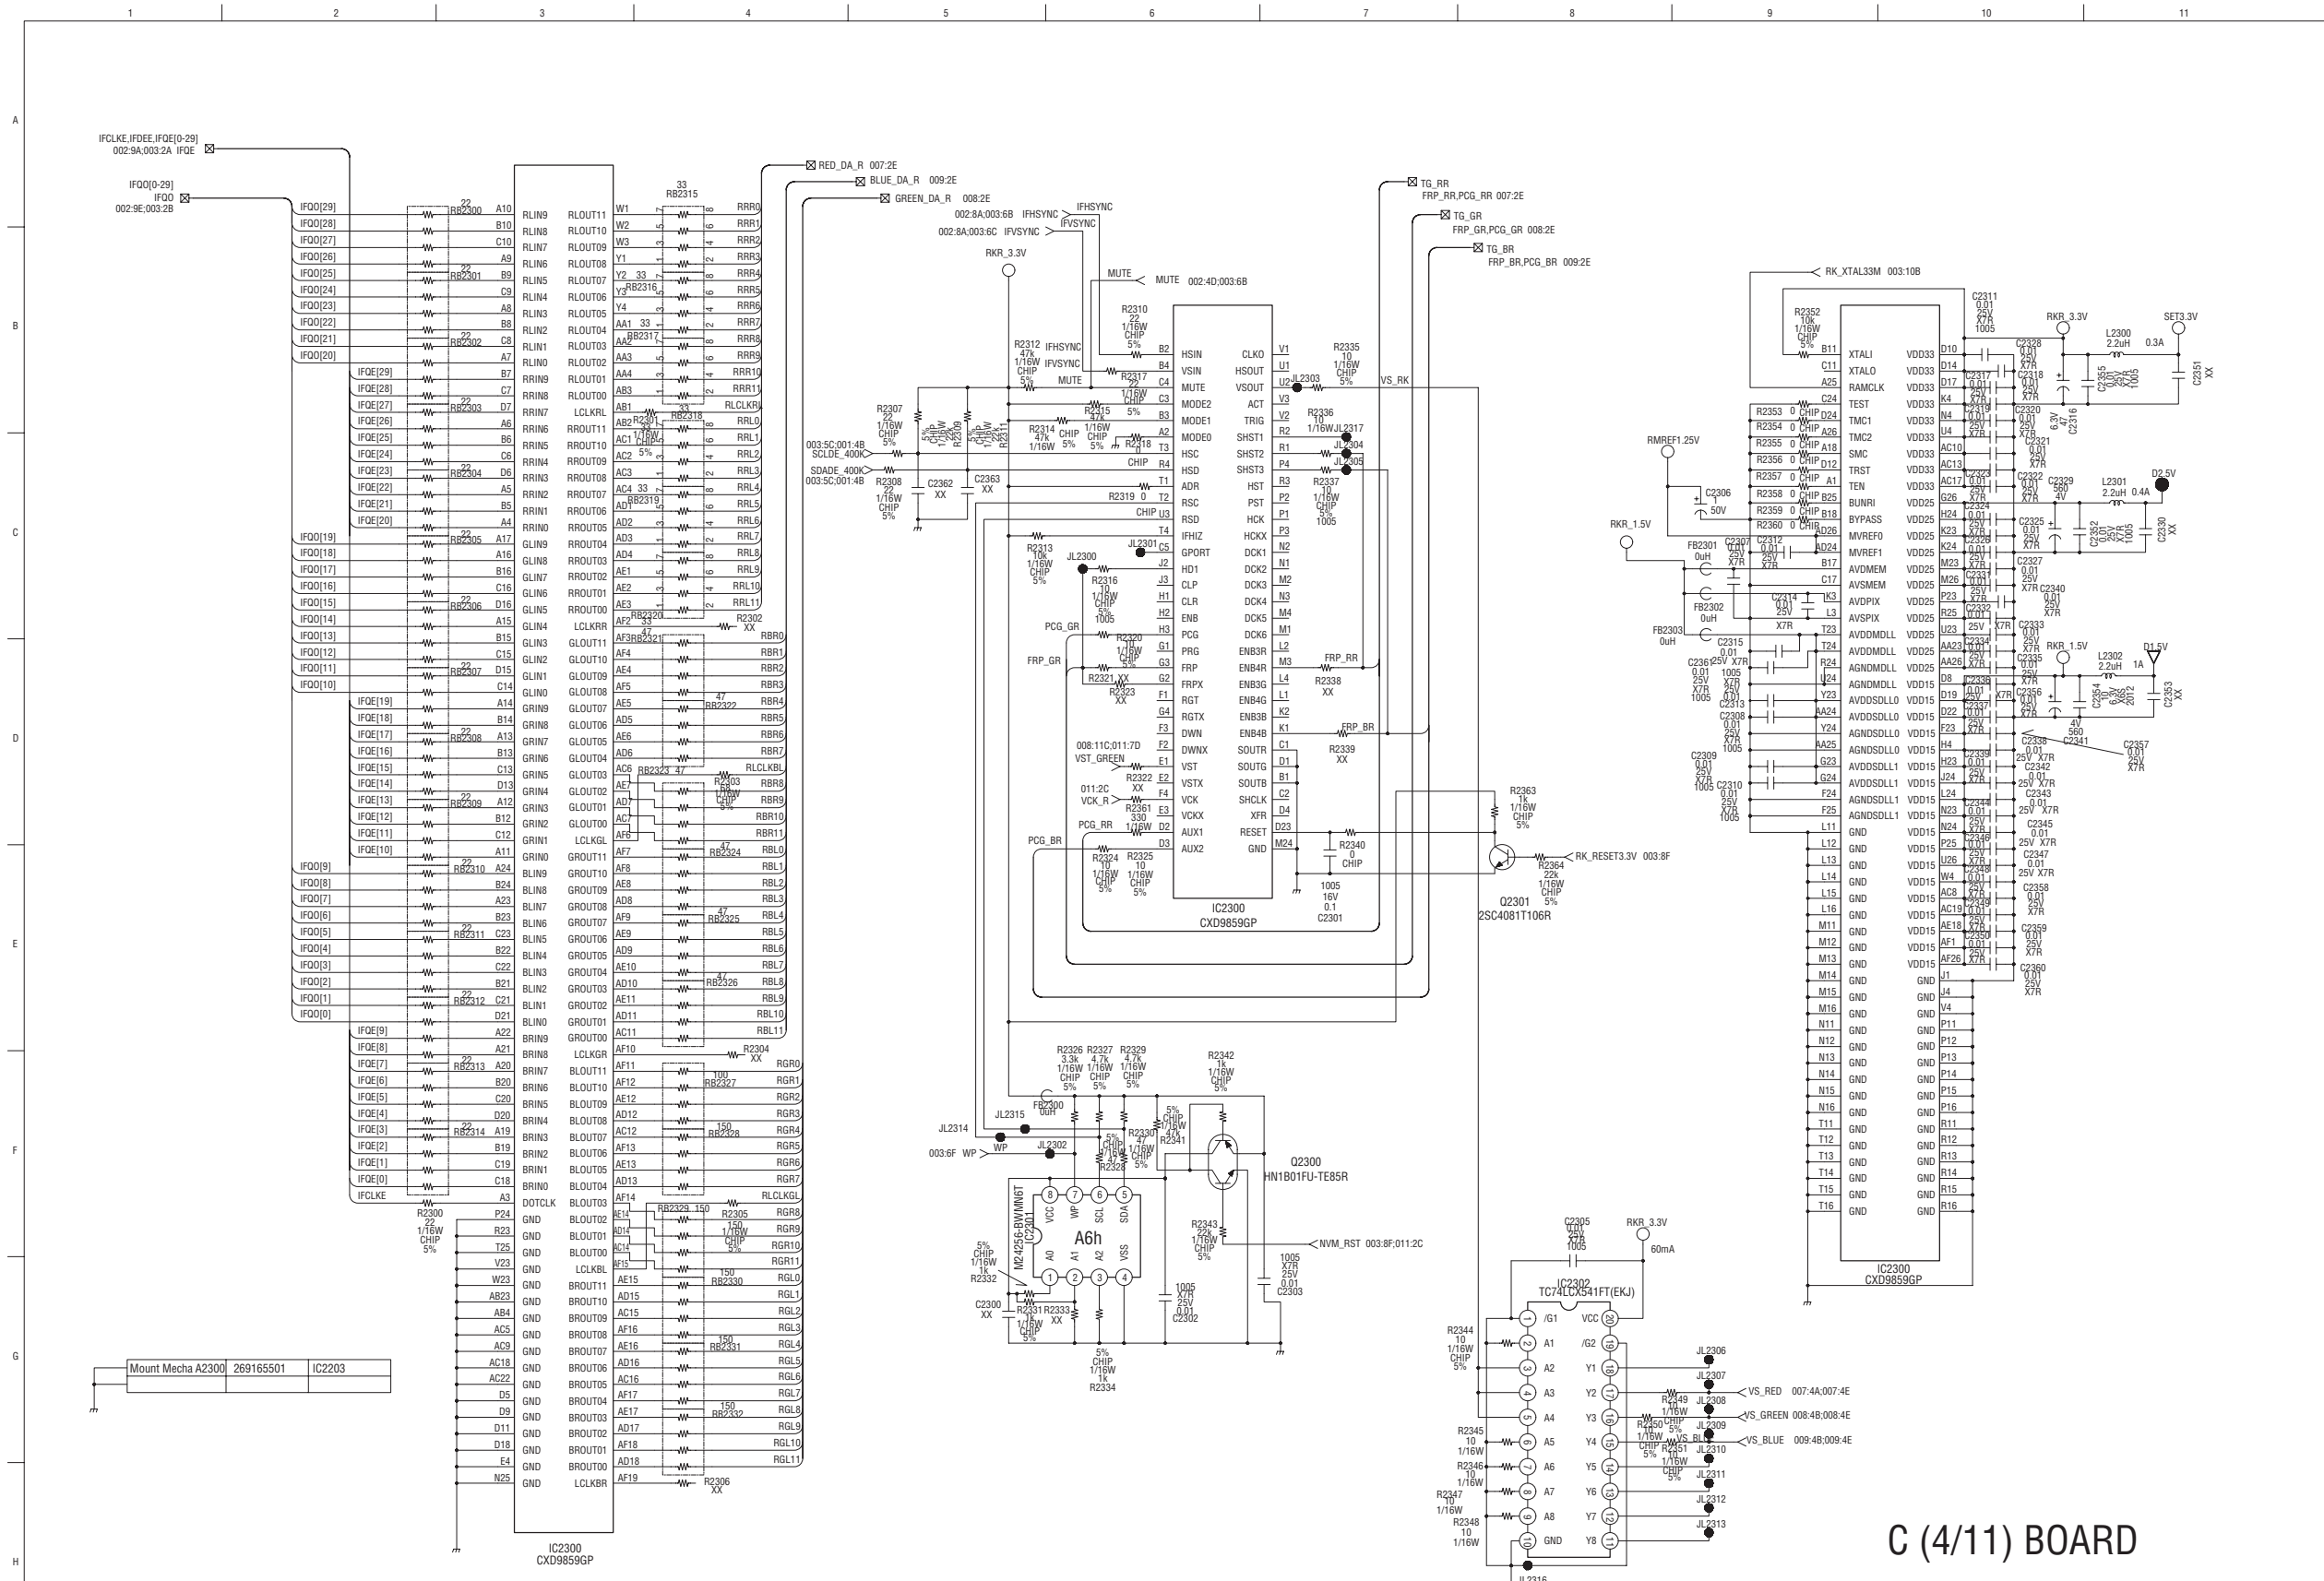

C (4/11) BOARD




(23) Schematic Diagram of C (6/11) Board

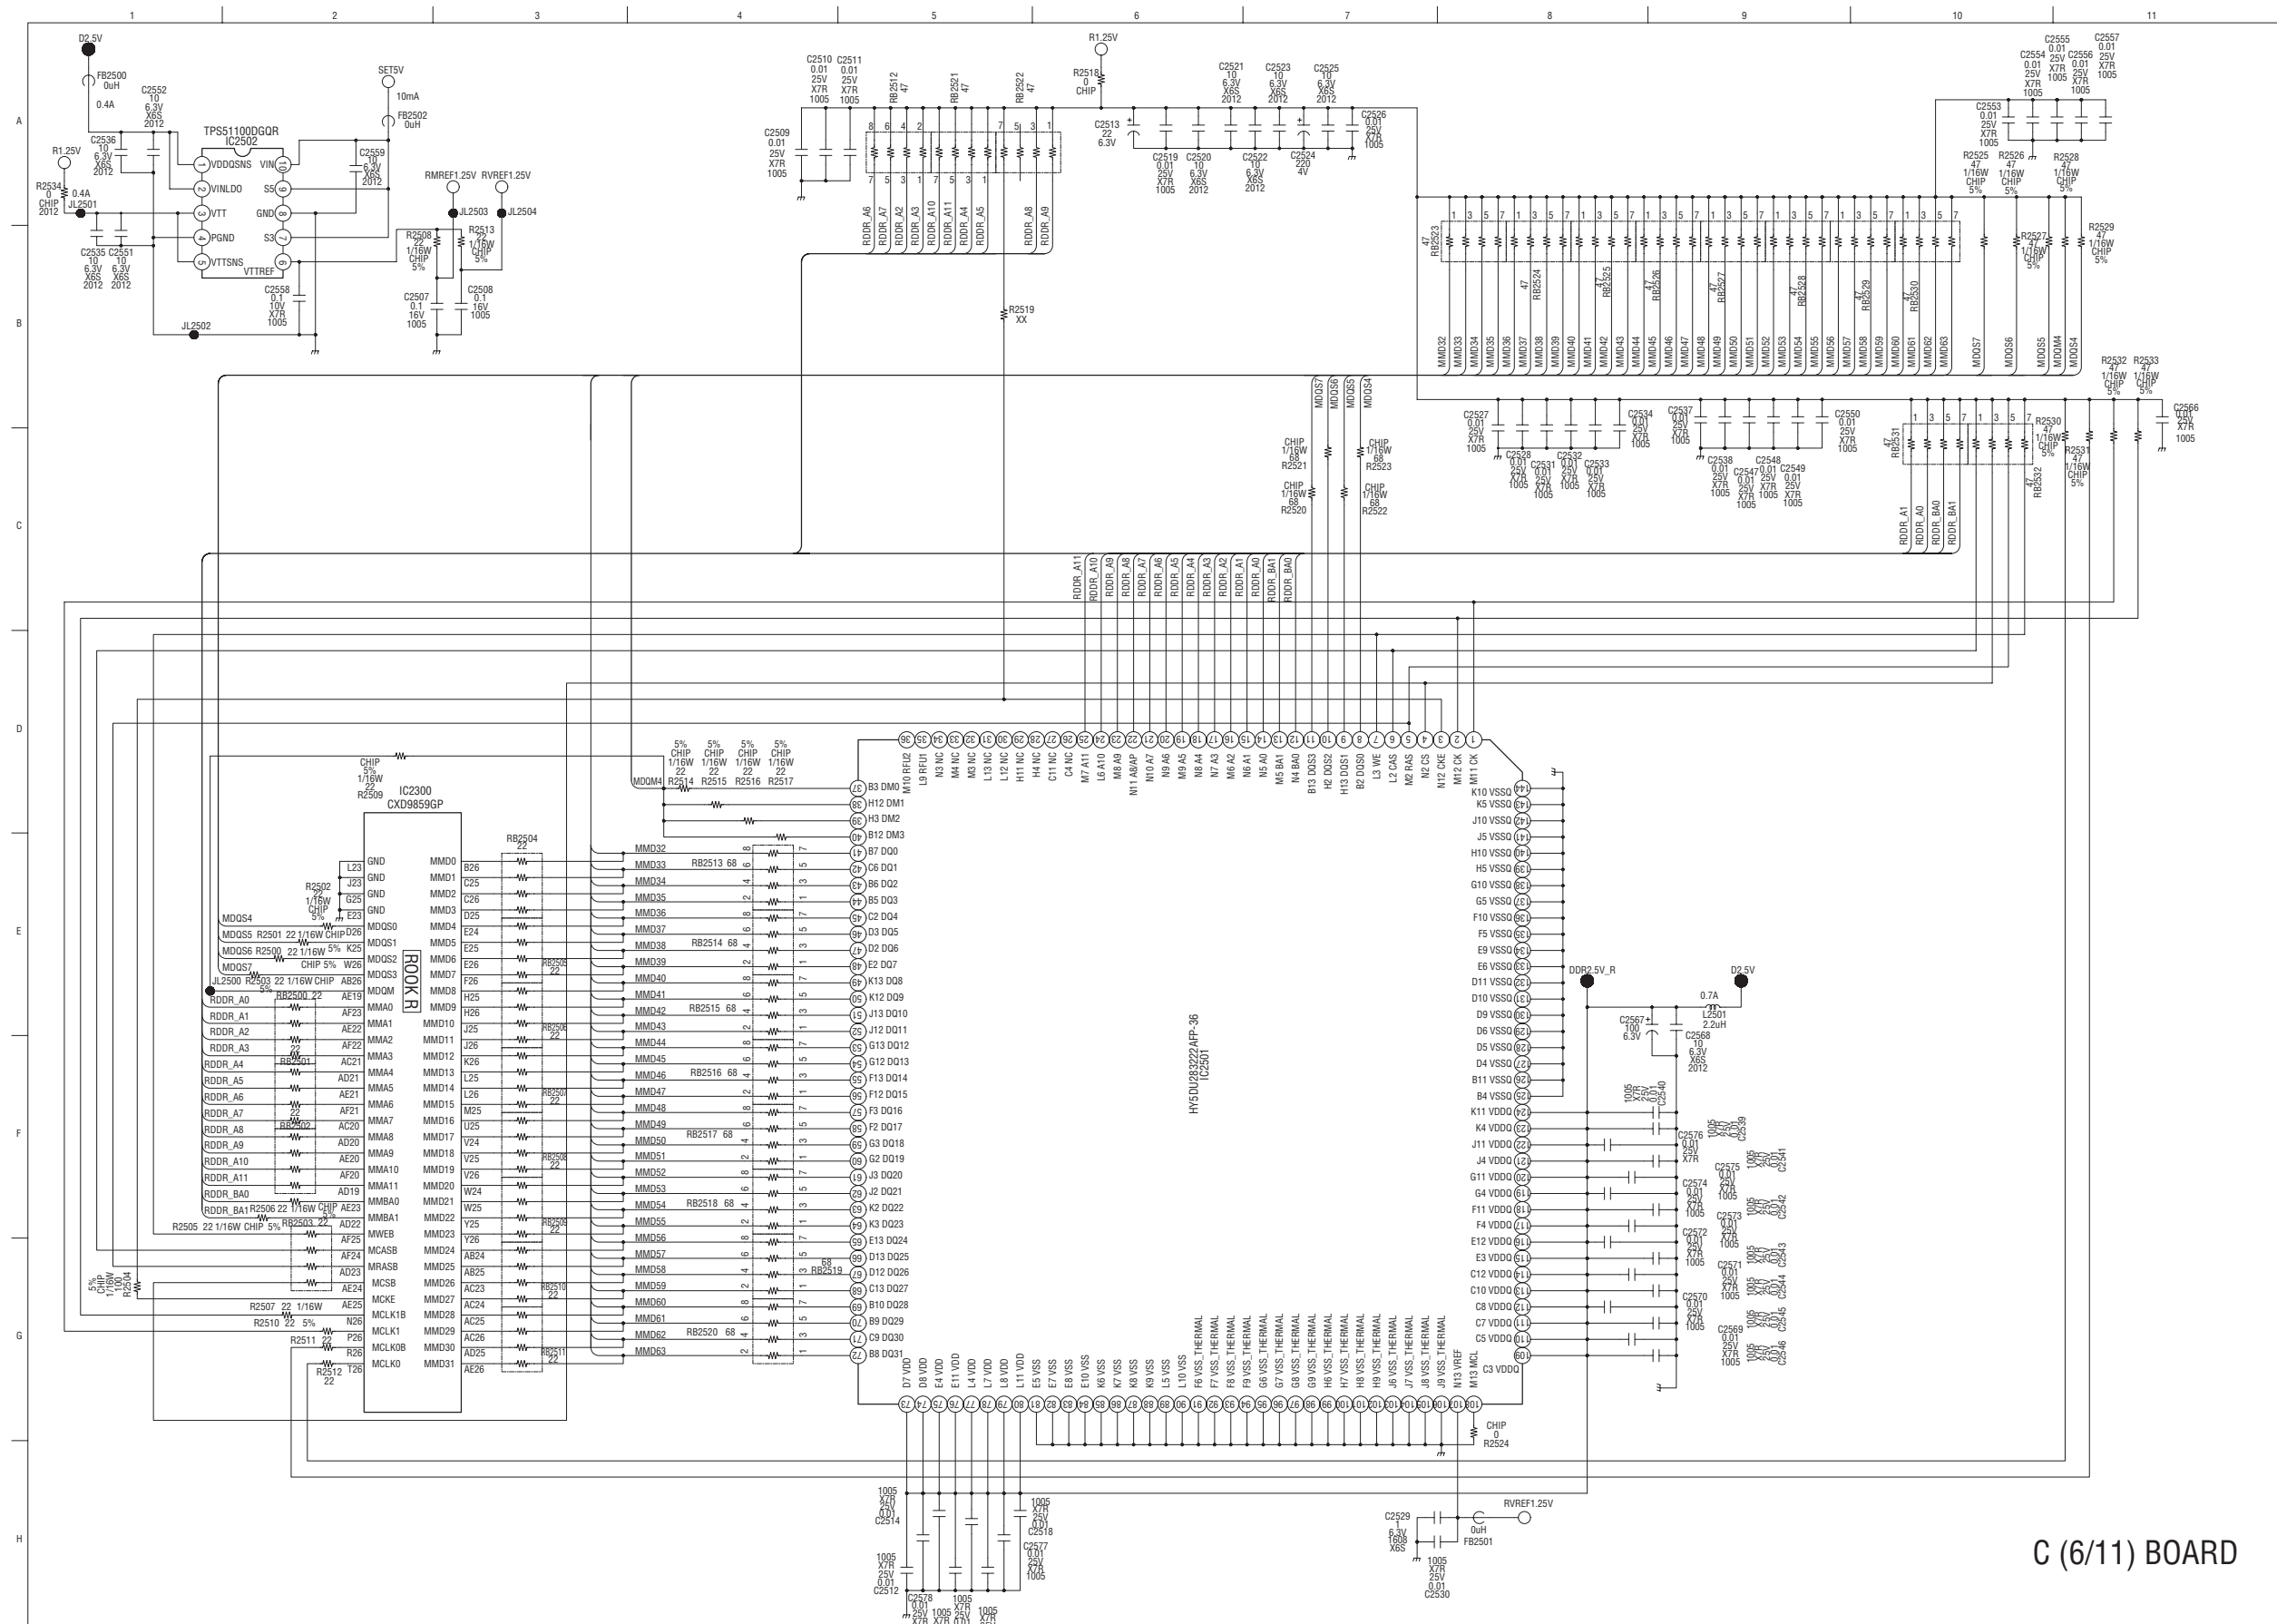


C (6/11) BOARD

(24) Schematic Diagram of C (7/11) Board

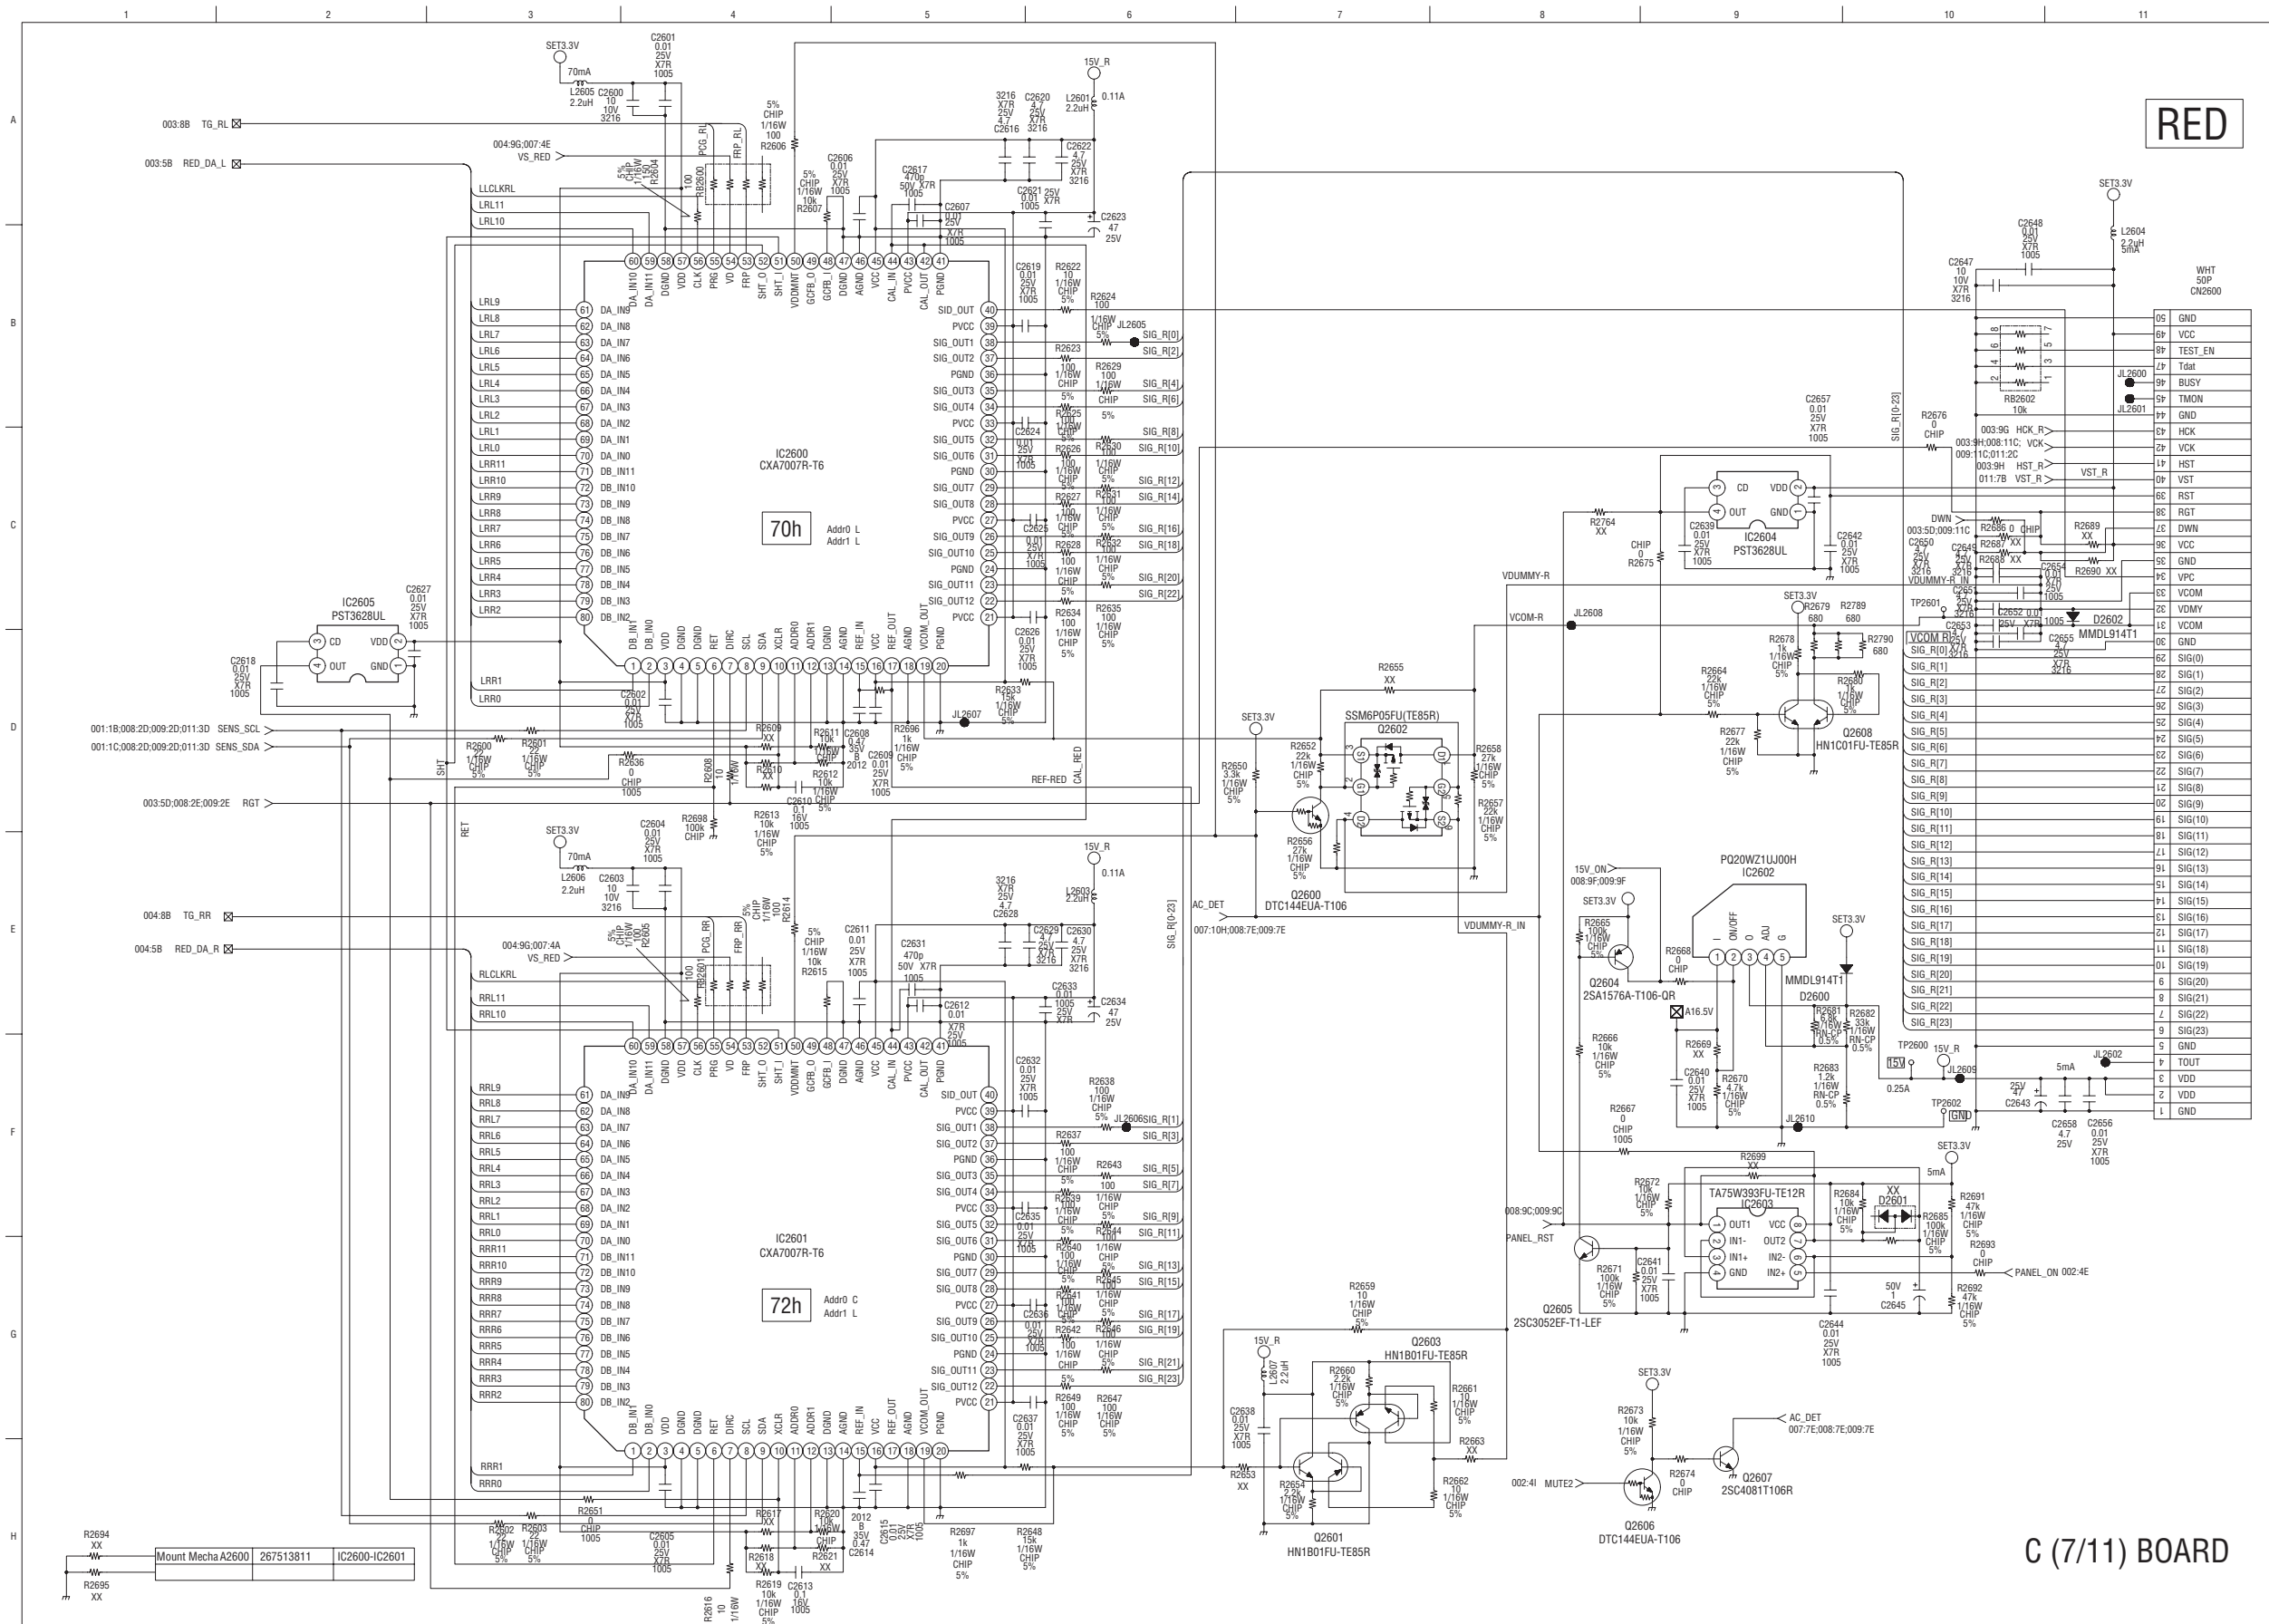


C (7/11) BOARD

(25) Schematic Diagram of C (8/11) Board

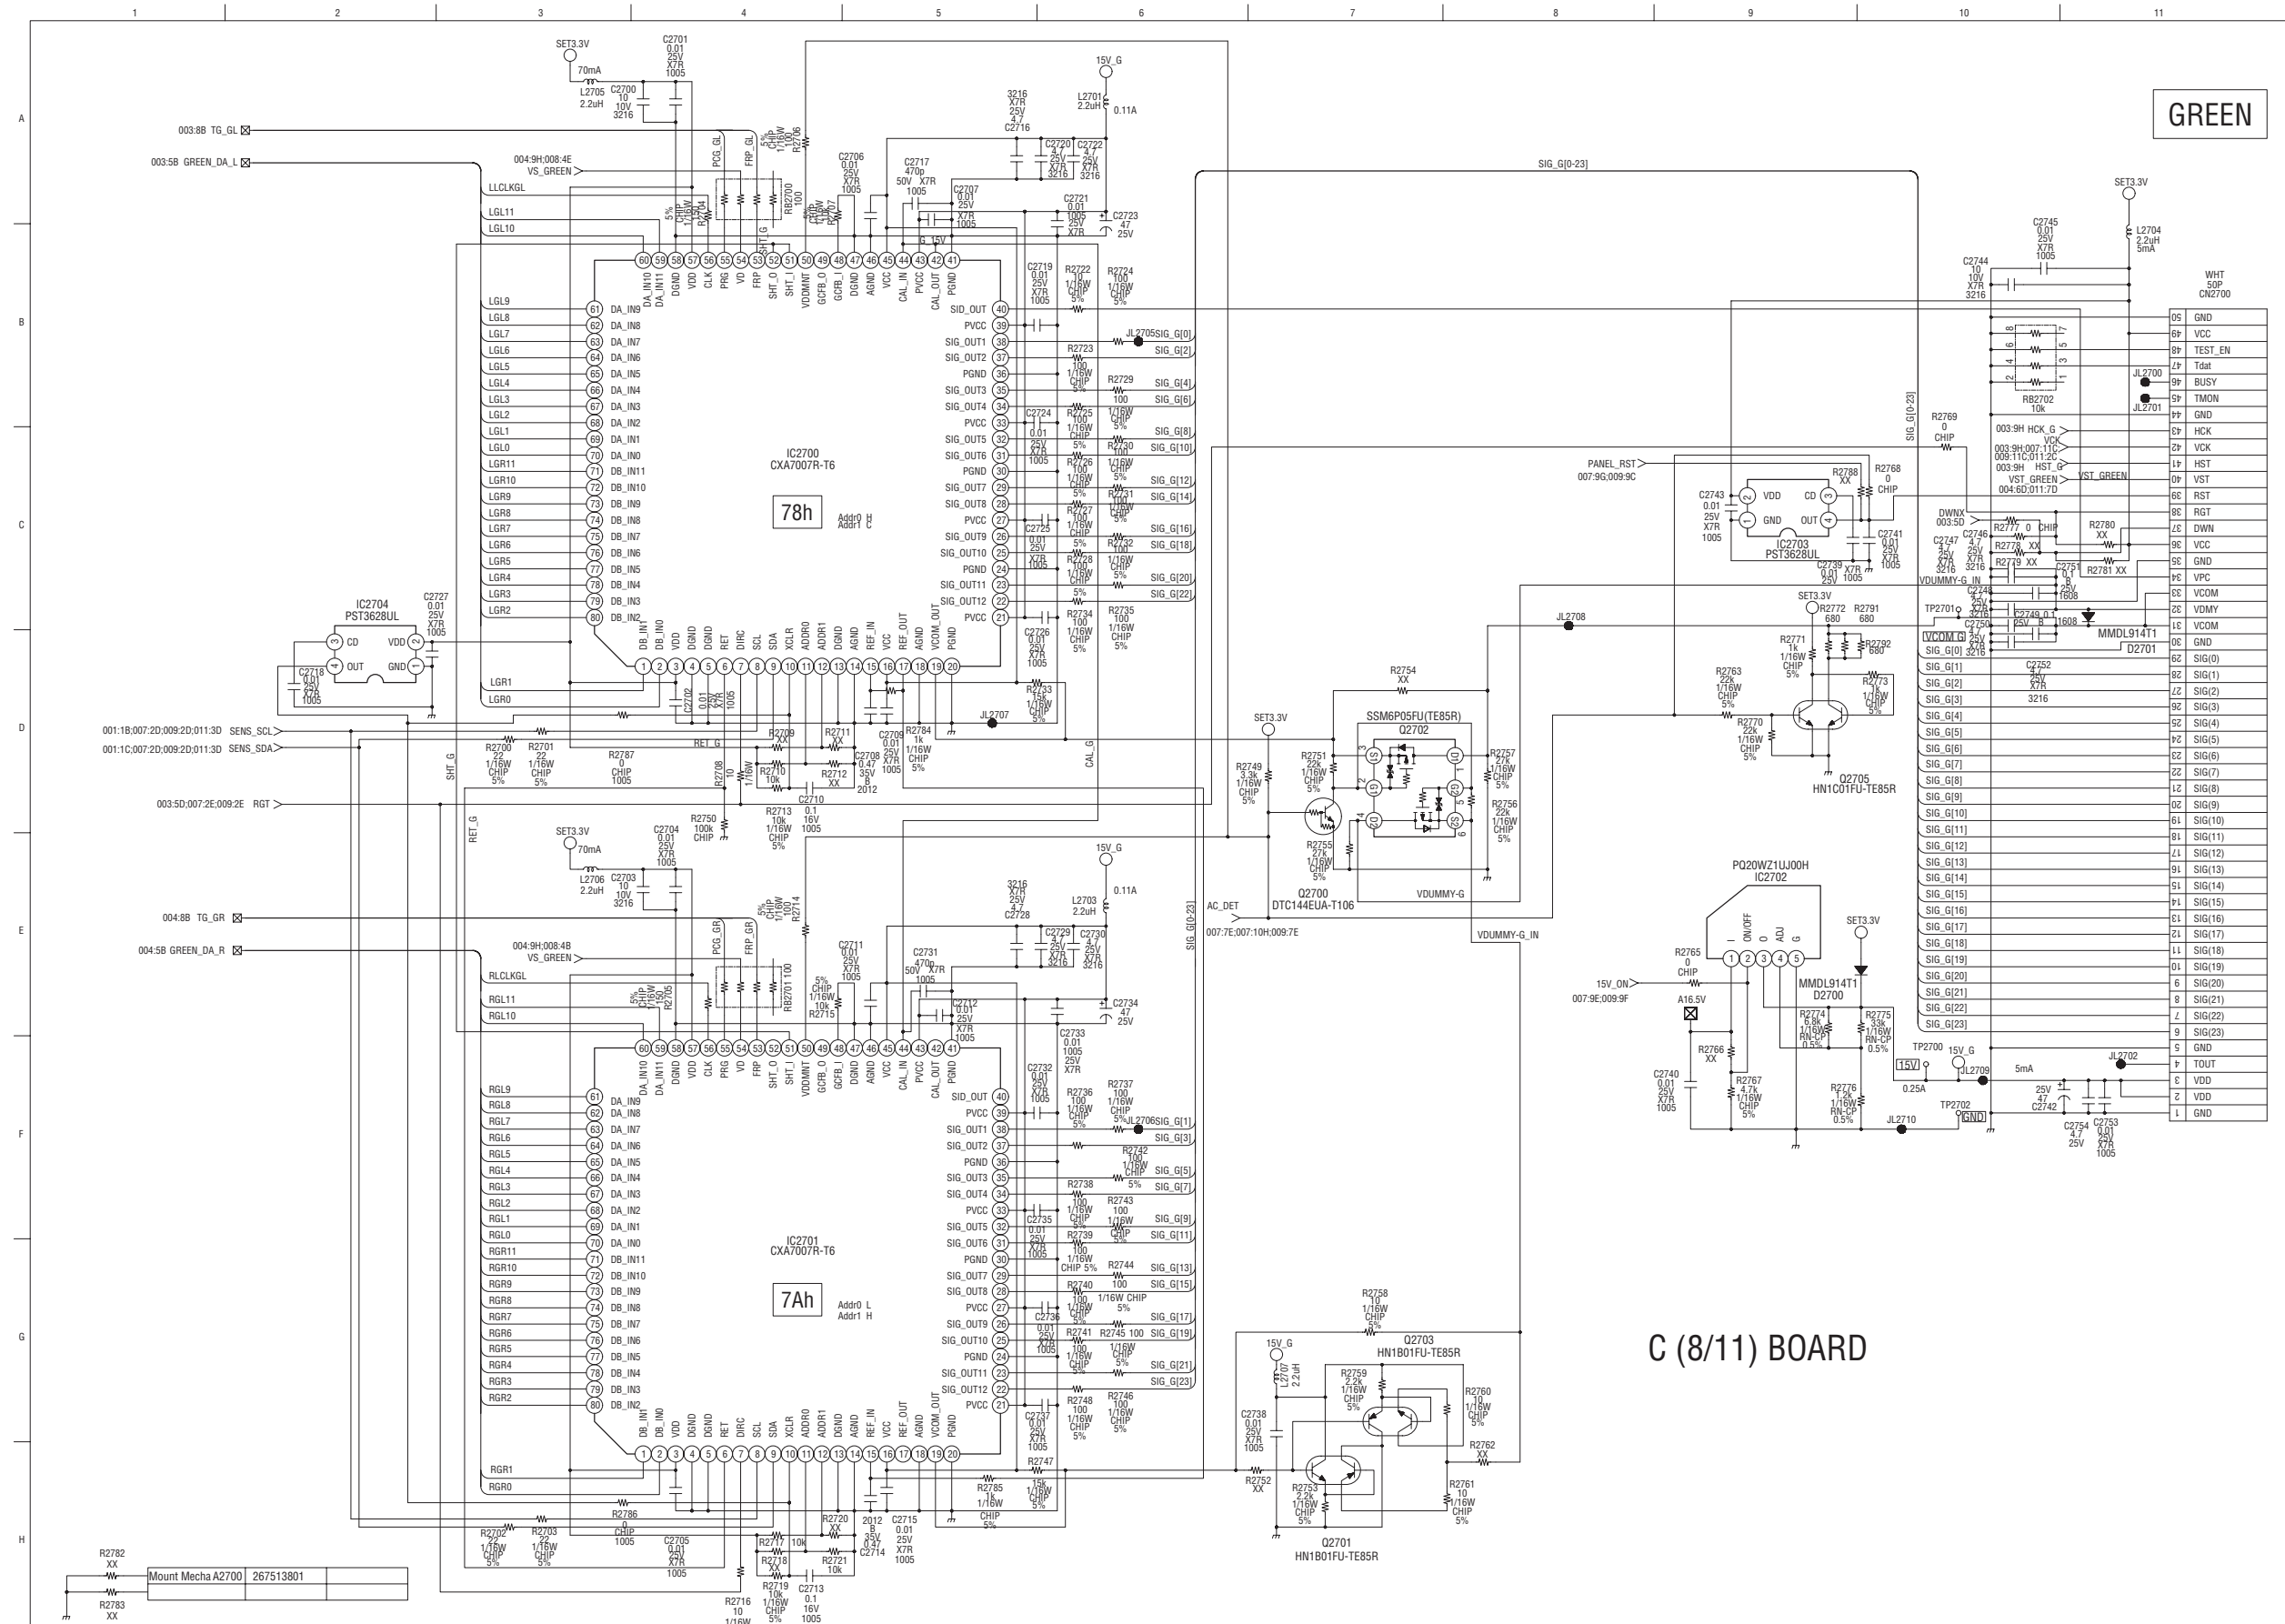


(26) Schematic Diagram of C (9/11) Board

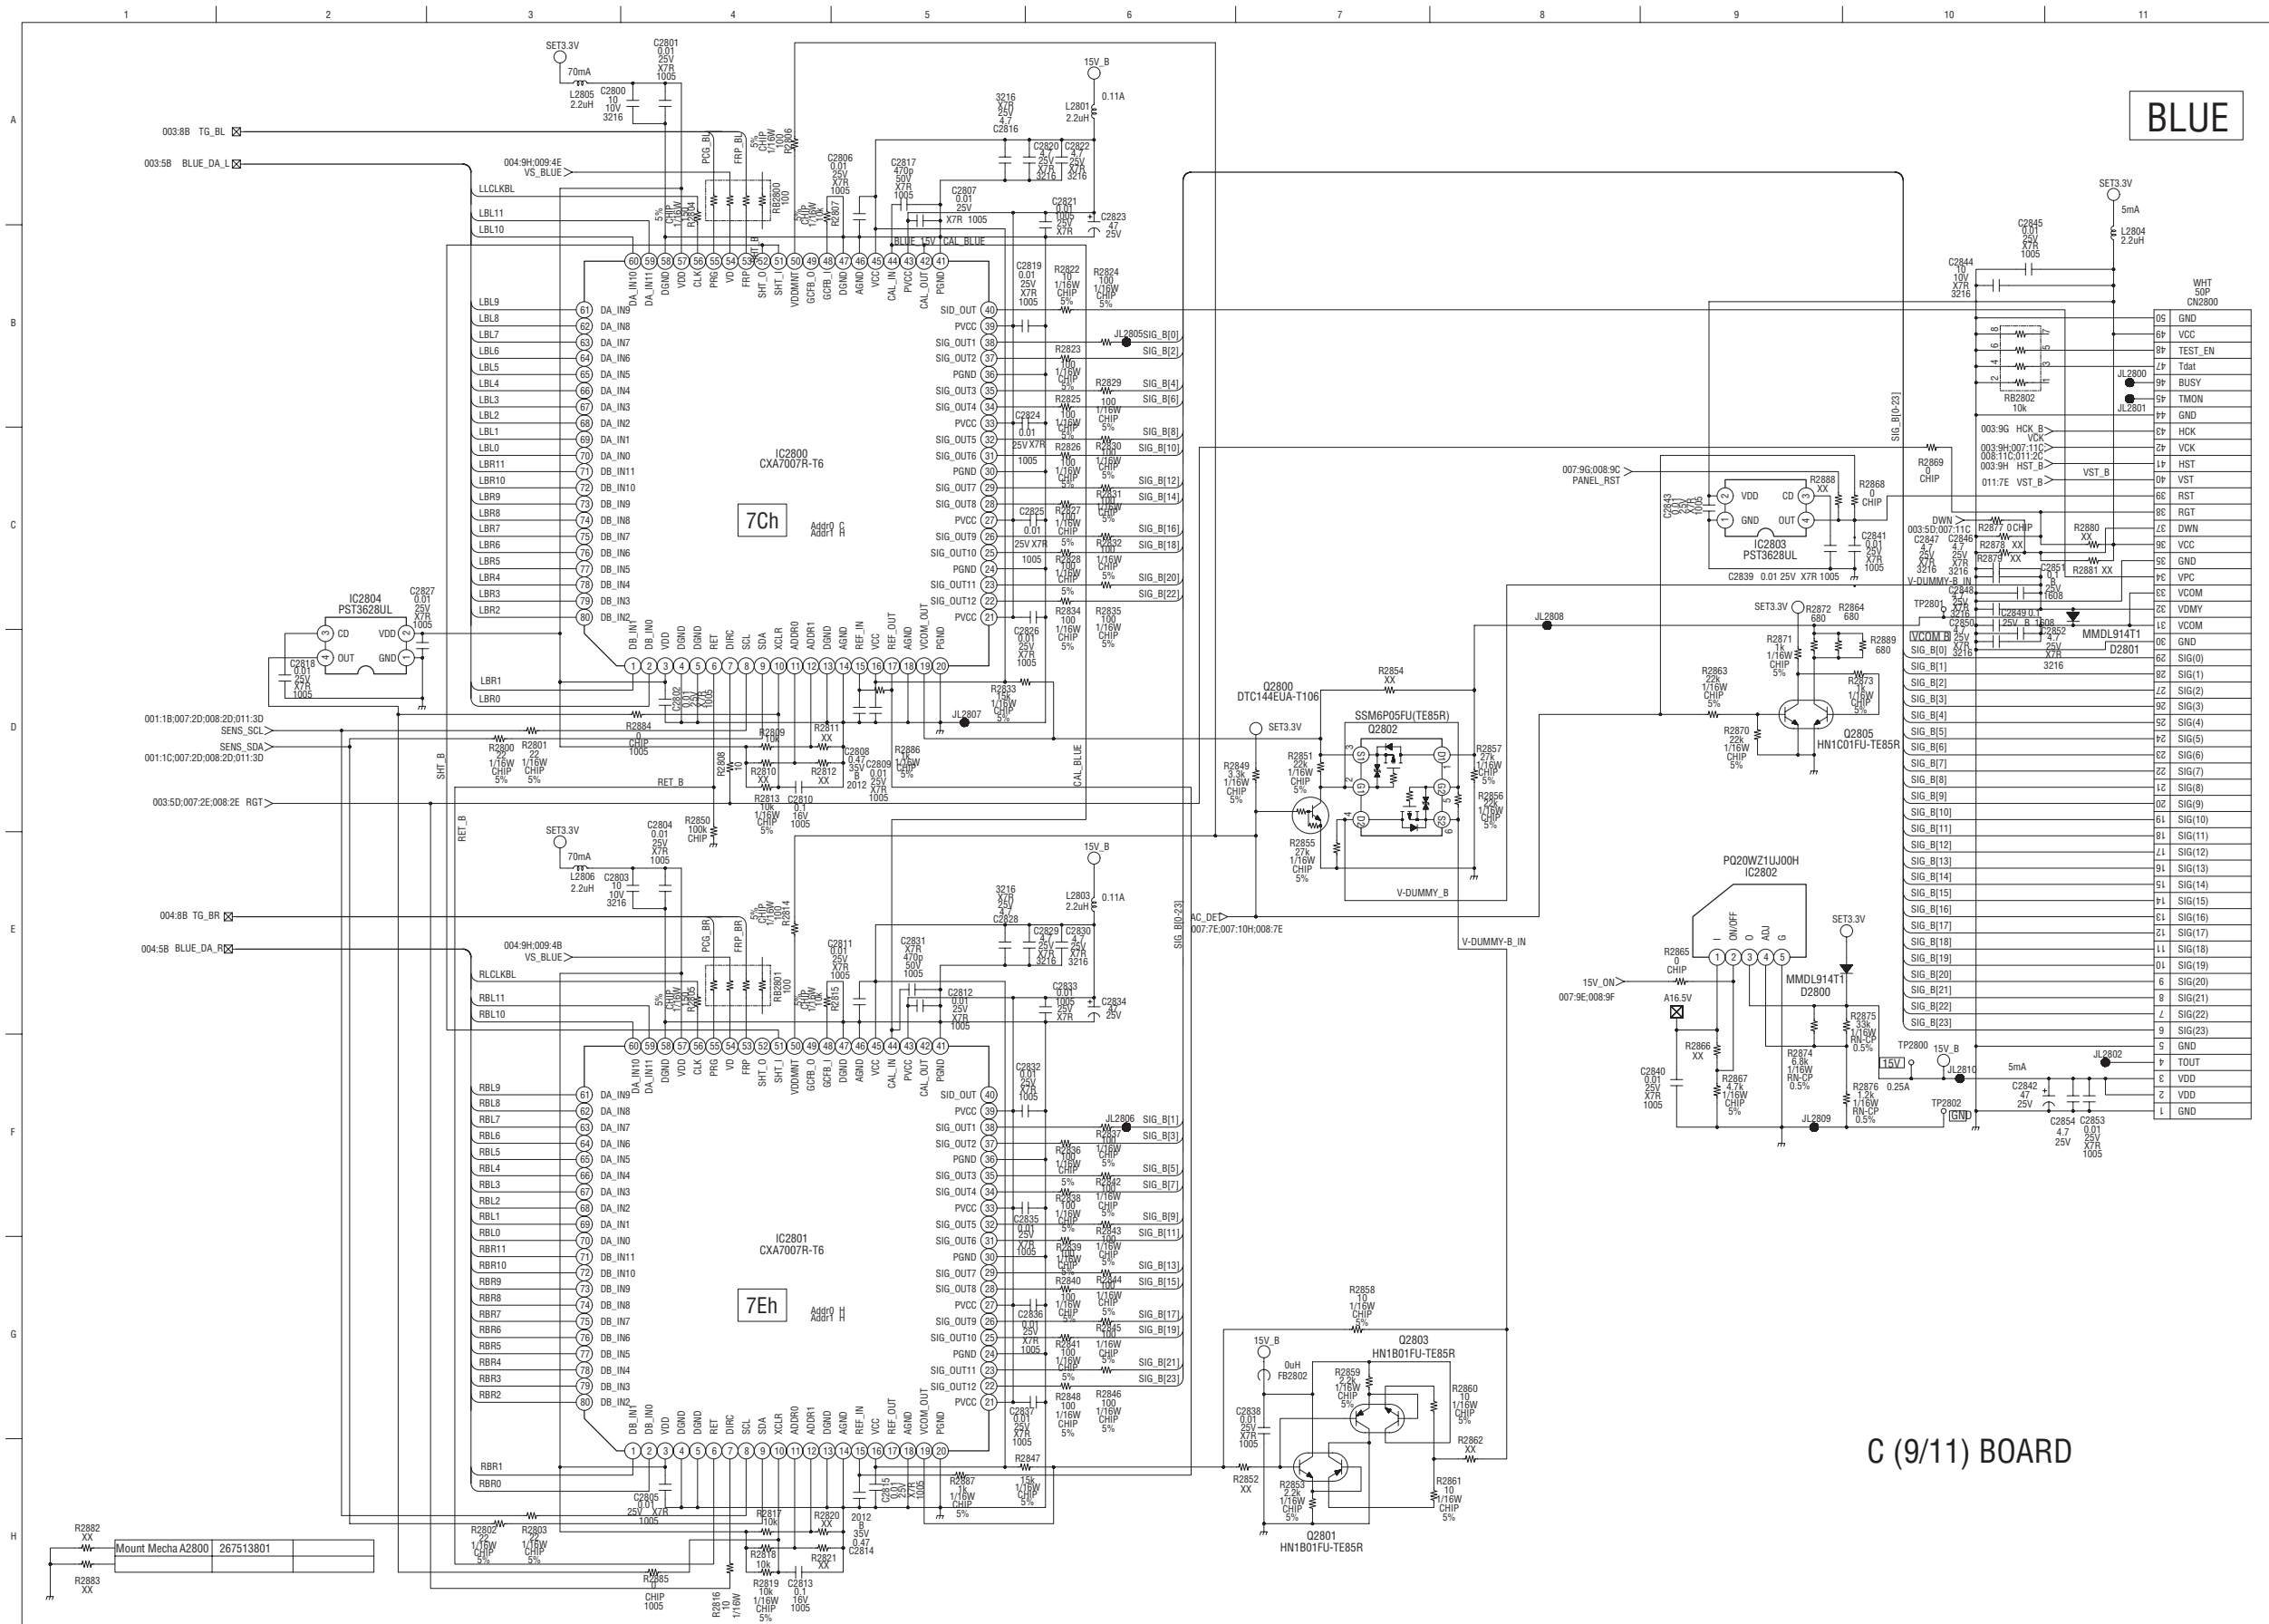




(27) Schematic Diagram of C (10/11) Board

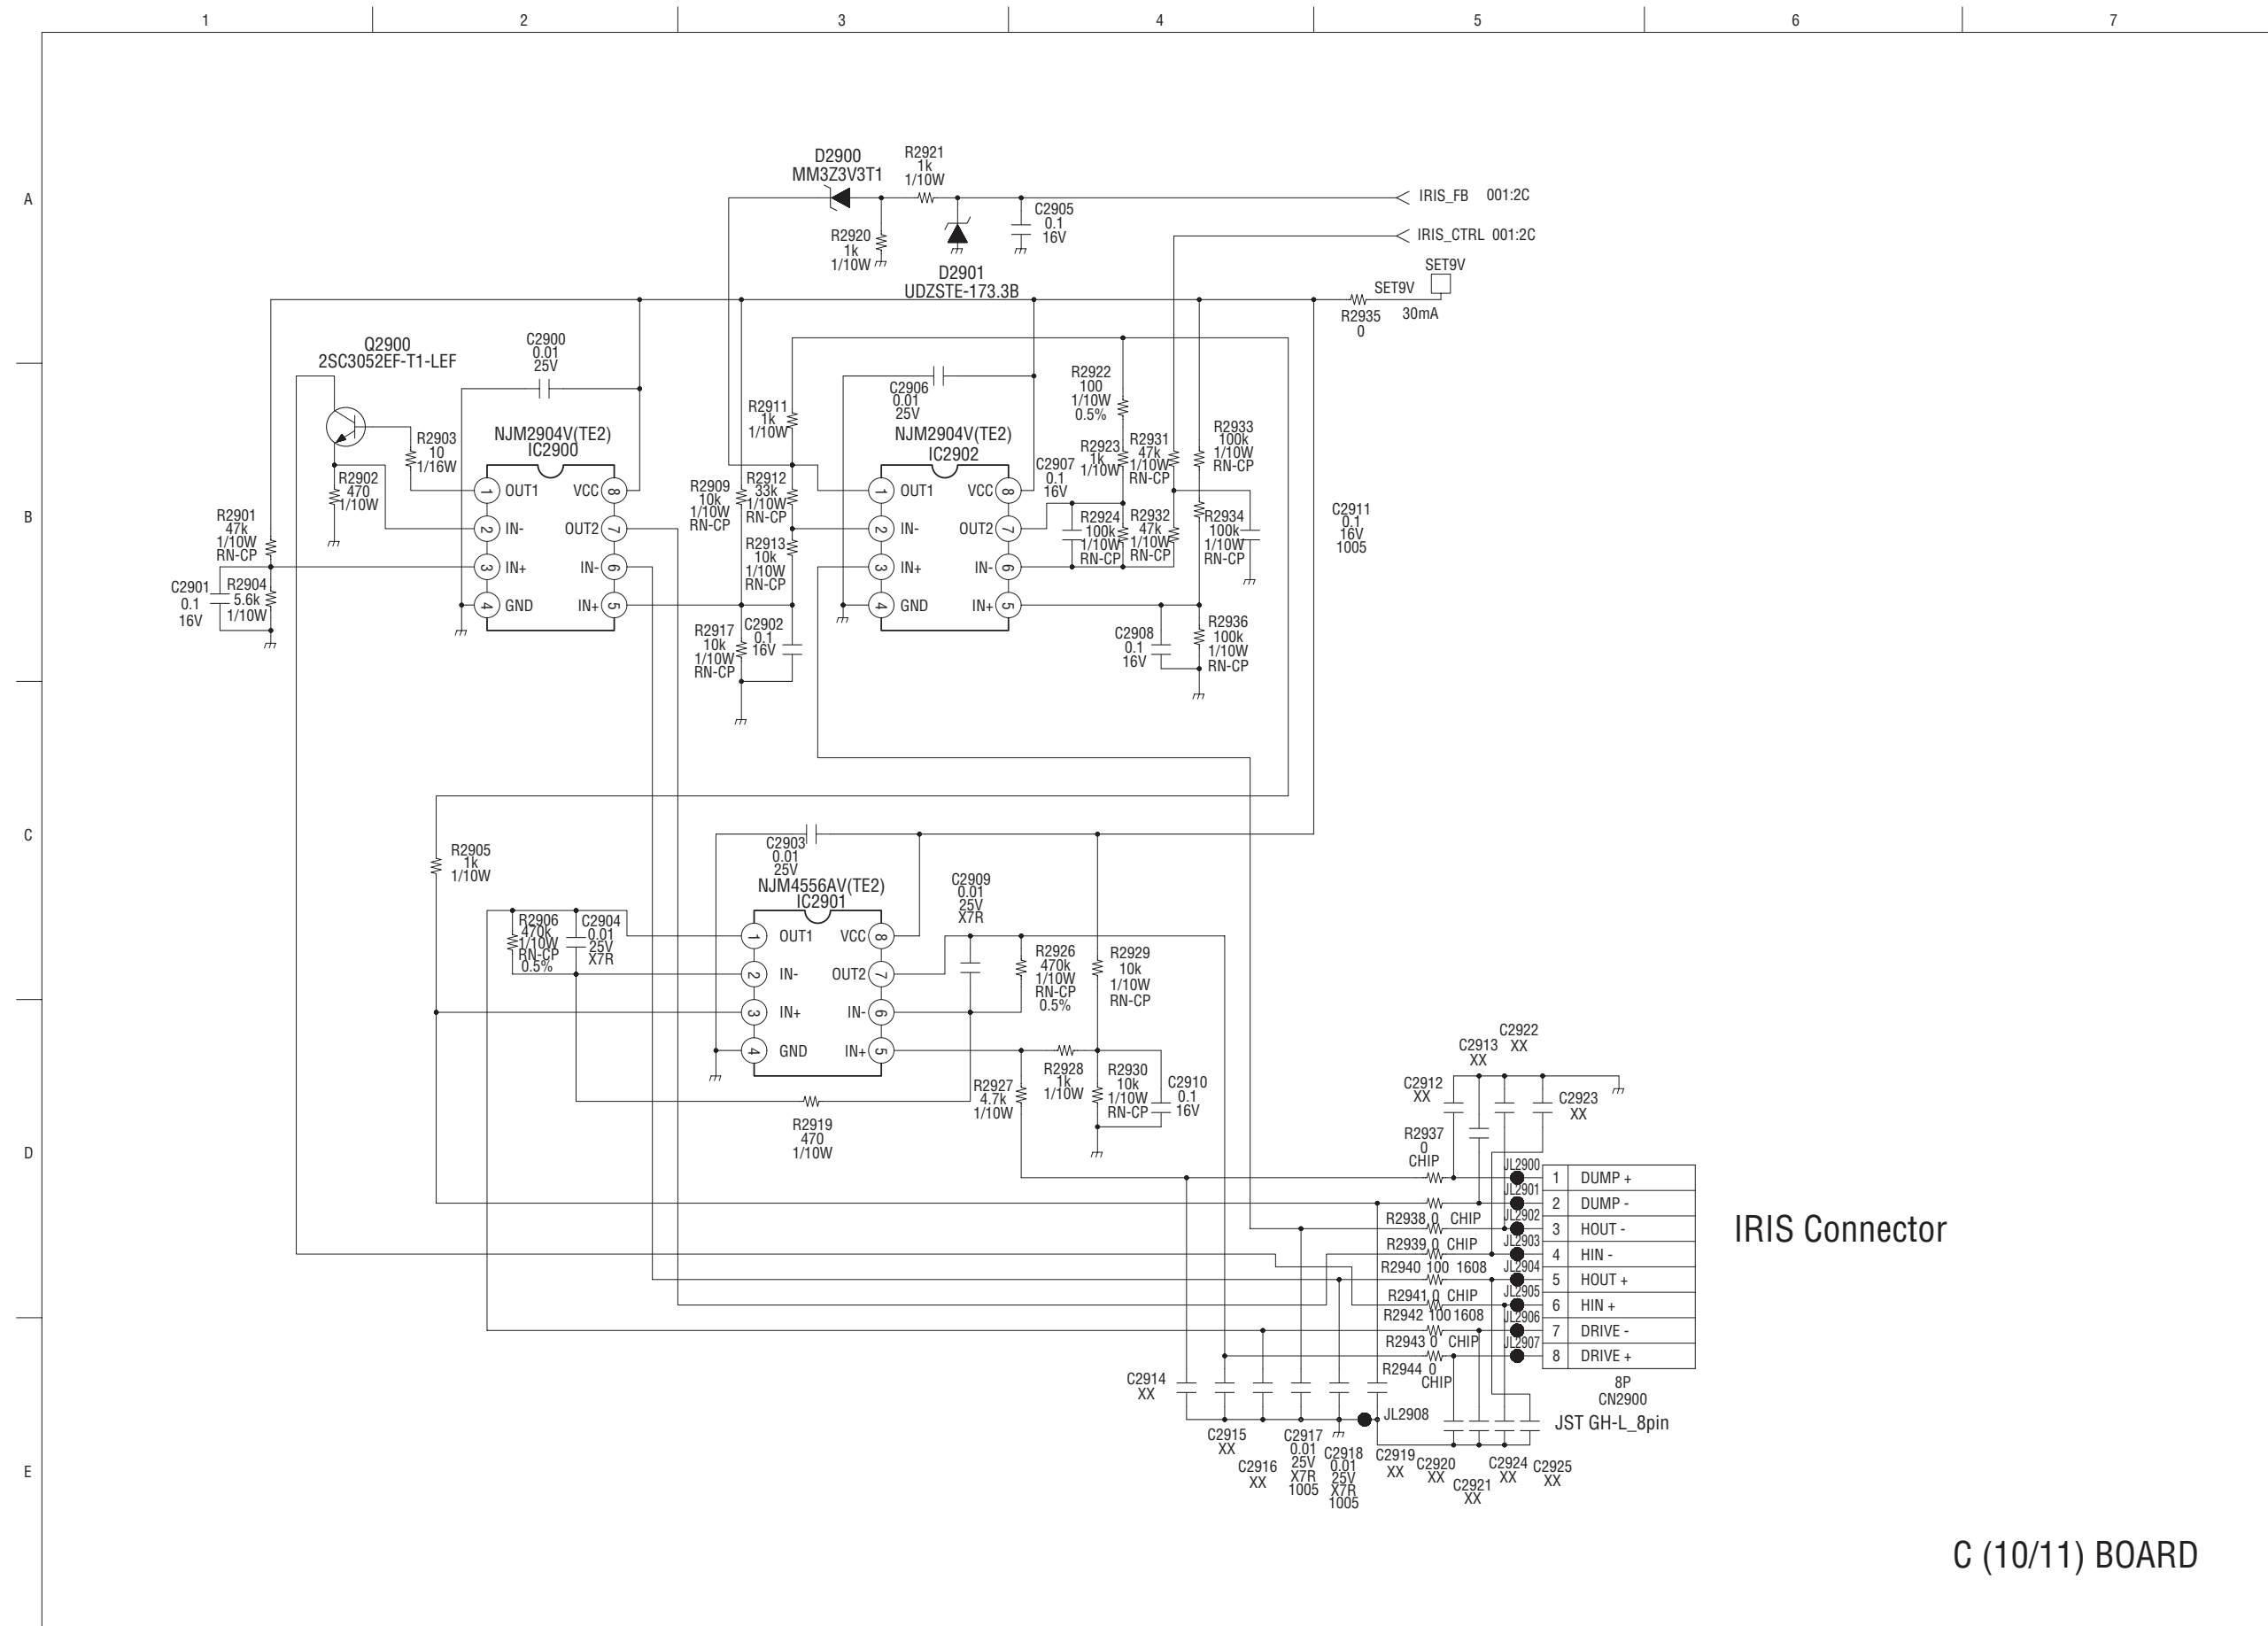


C (10/11) BOARD

(28) Schematic Diagram of C (11/11) Board

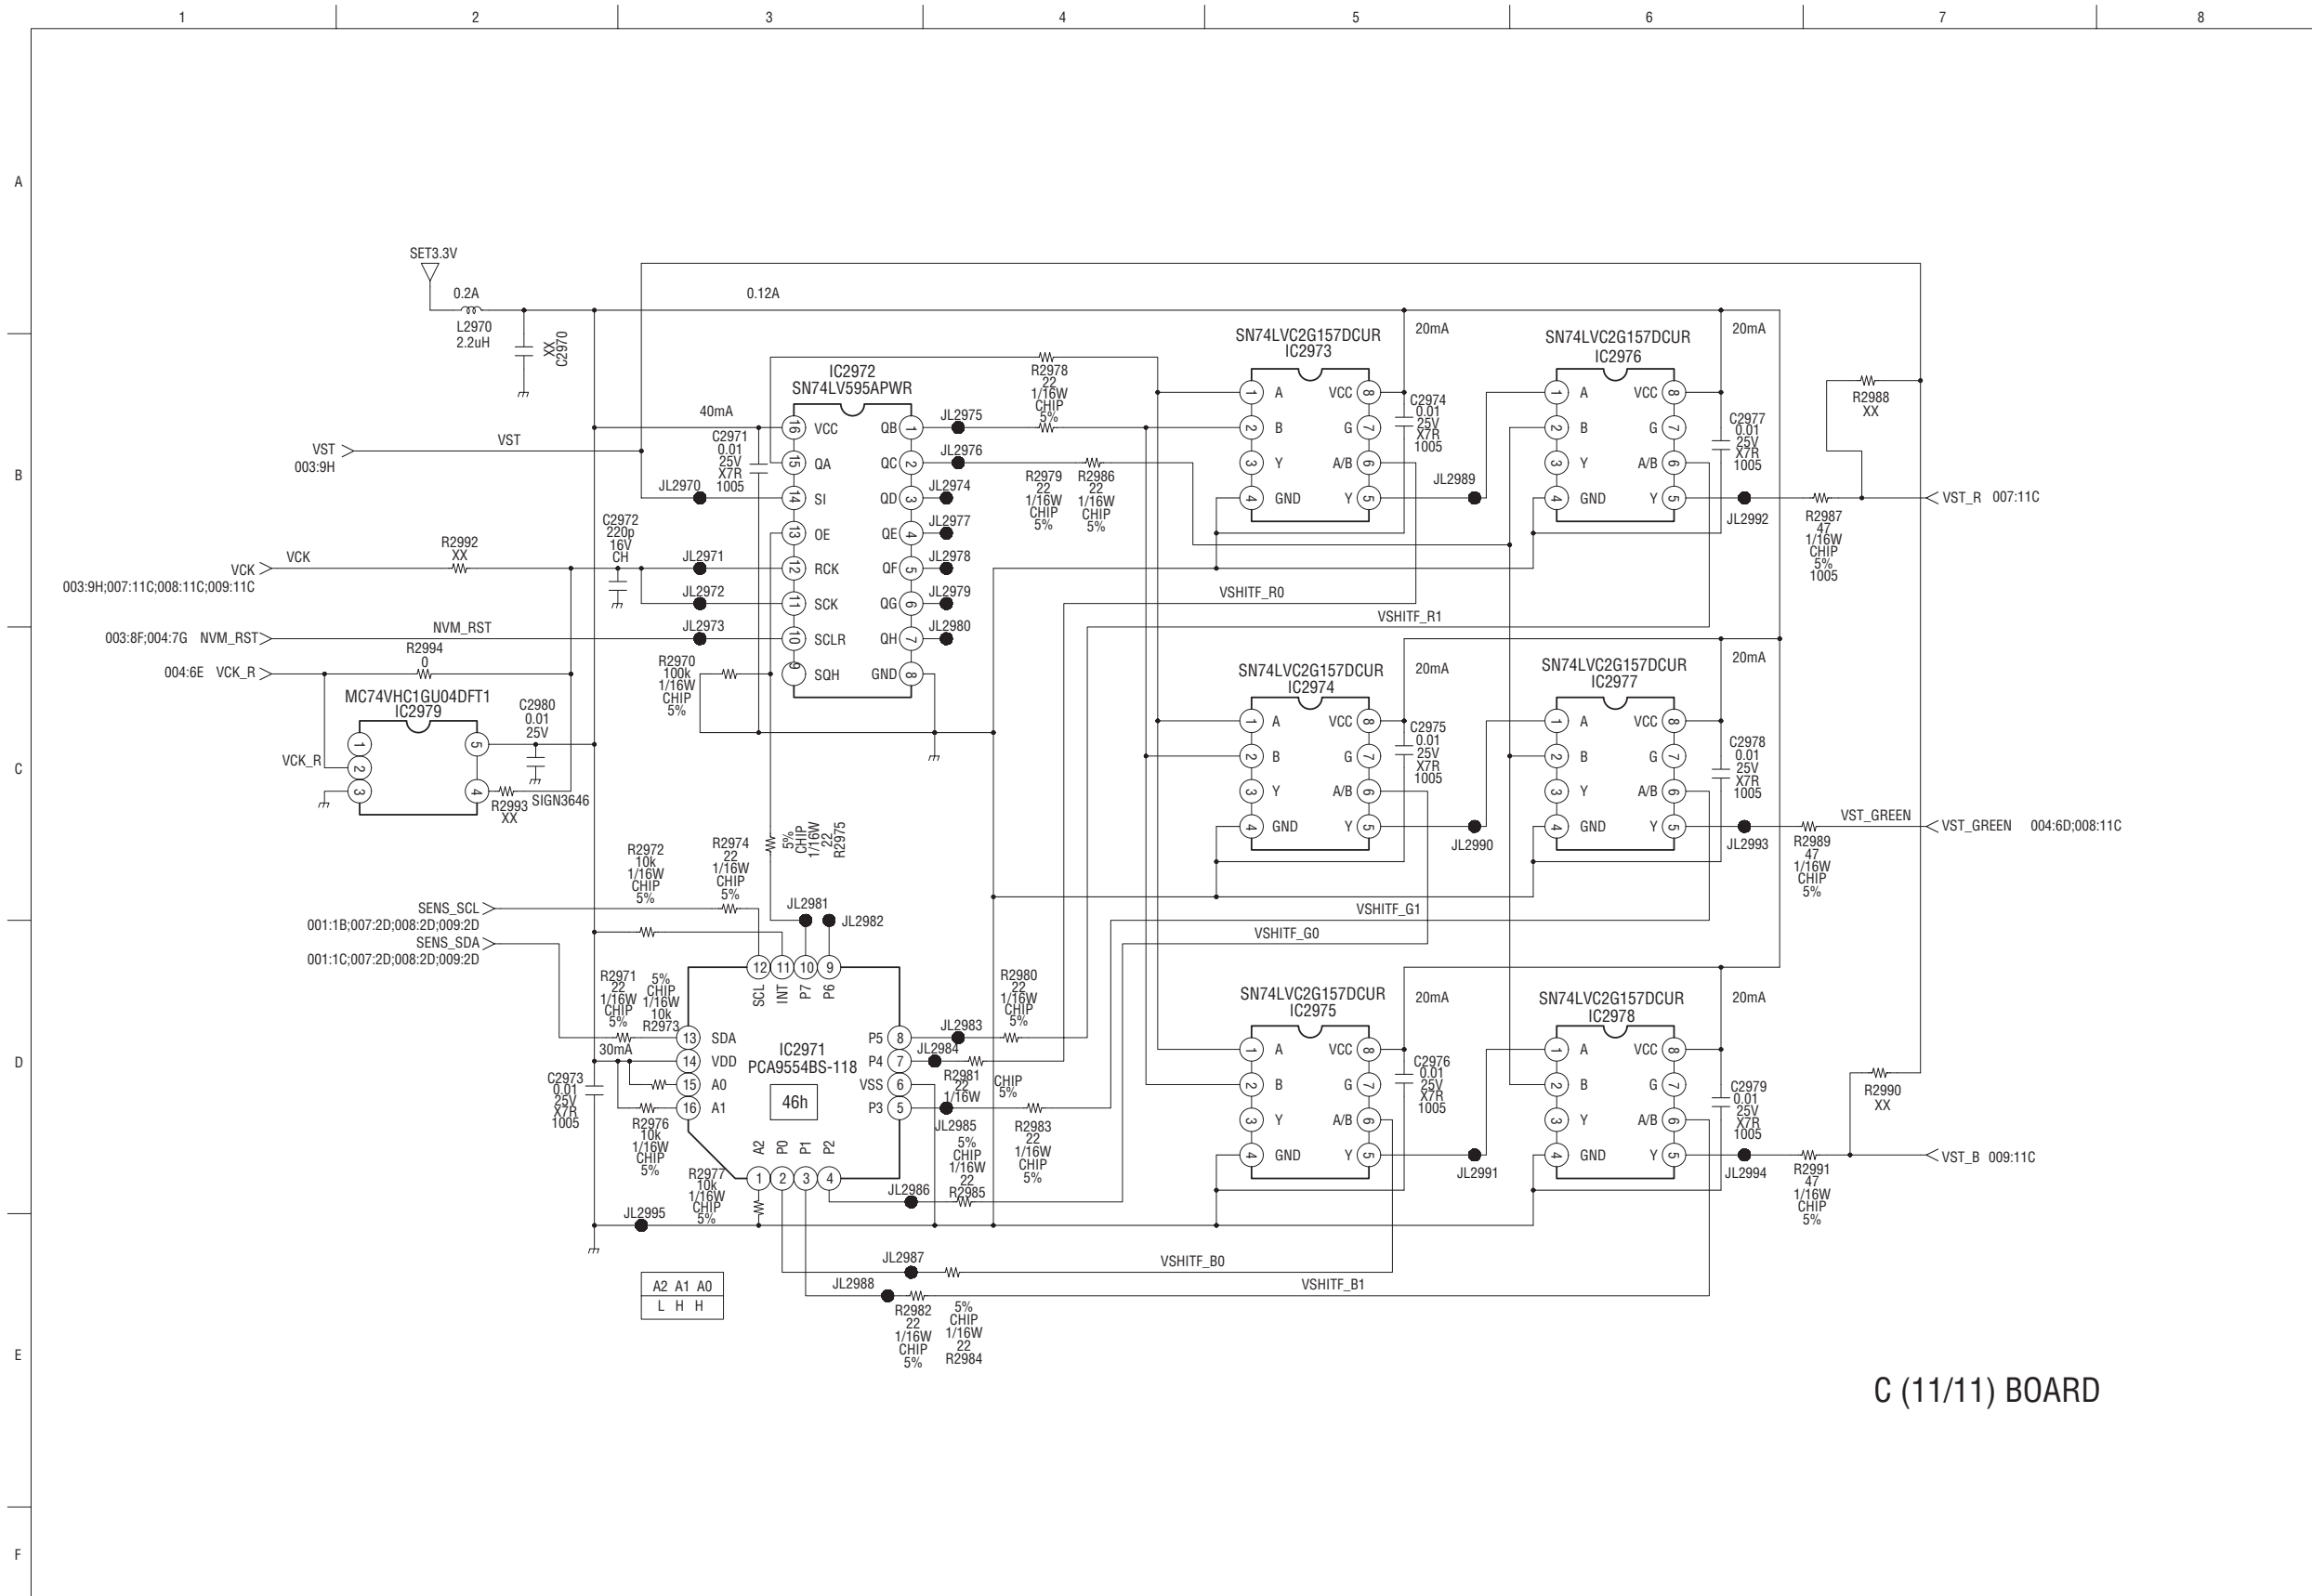


C (11/11) BOARD

(29) Schematic Diagram of G (1/2) Board

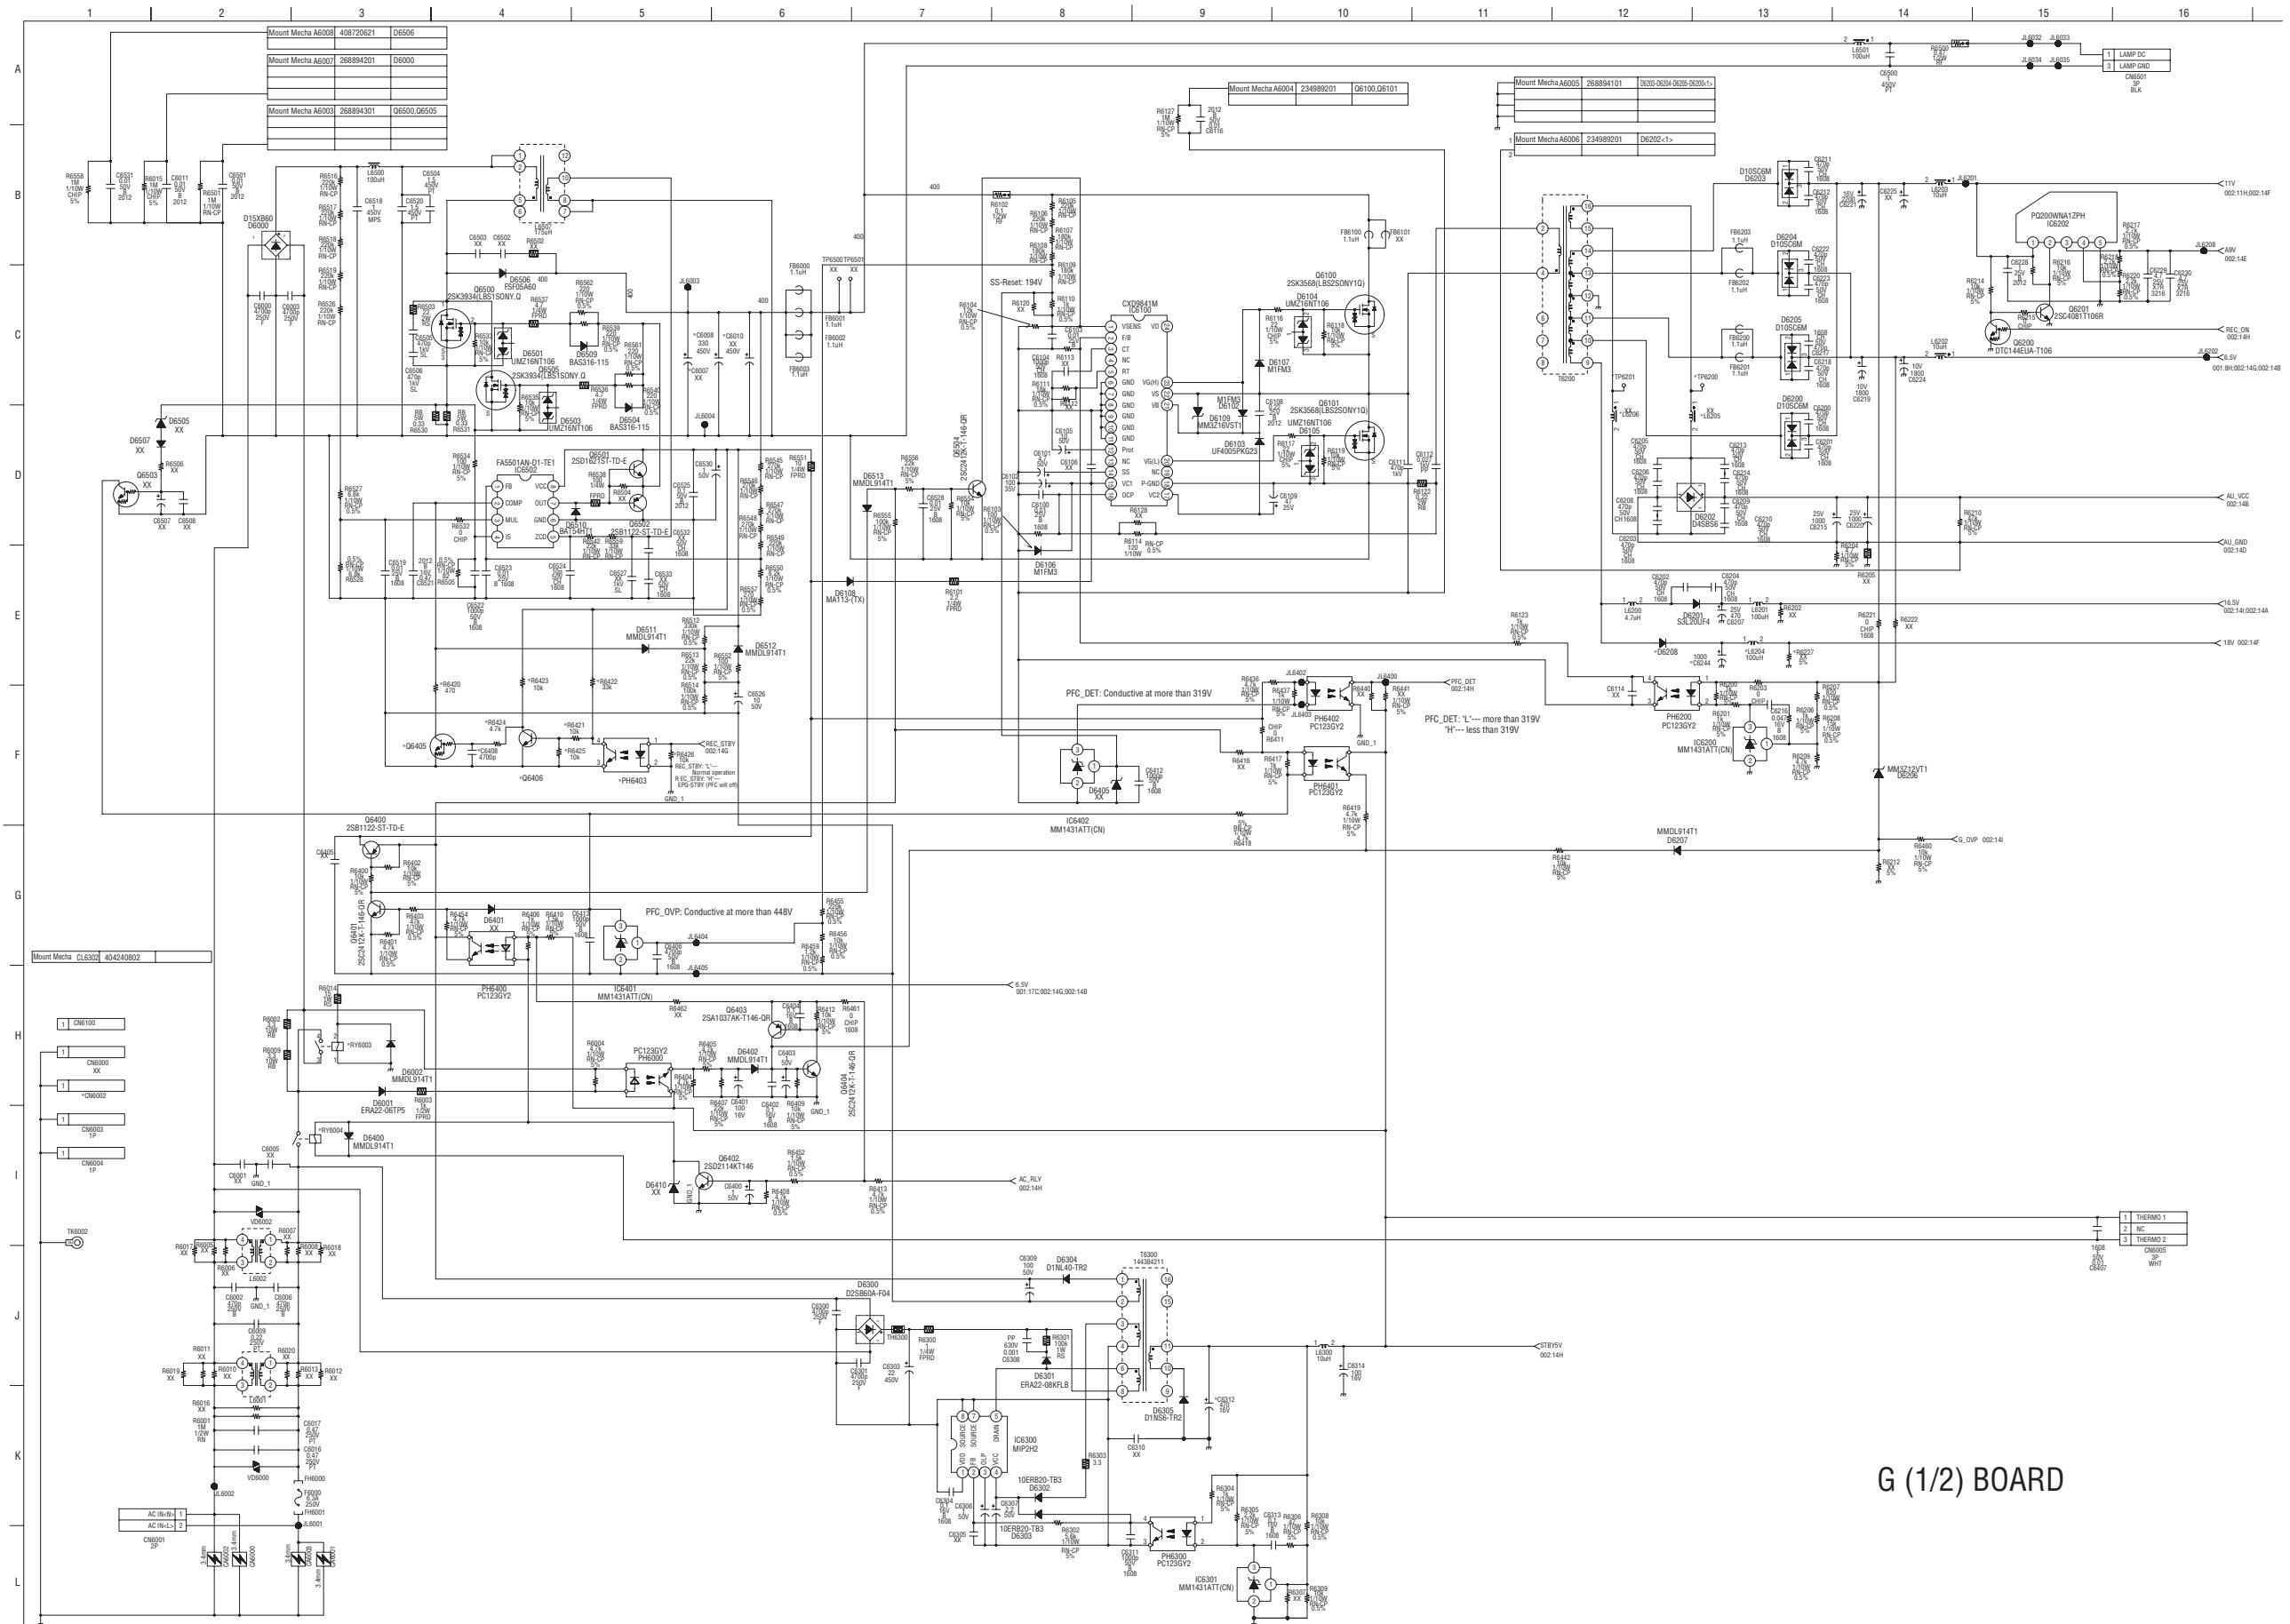


G (1/2) BOARD

(30) Schematic Diagram of G (2/2) Board

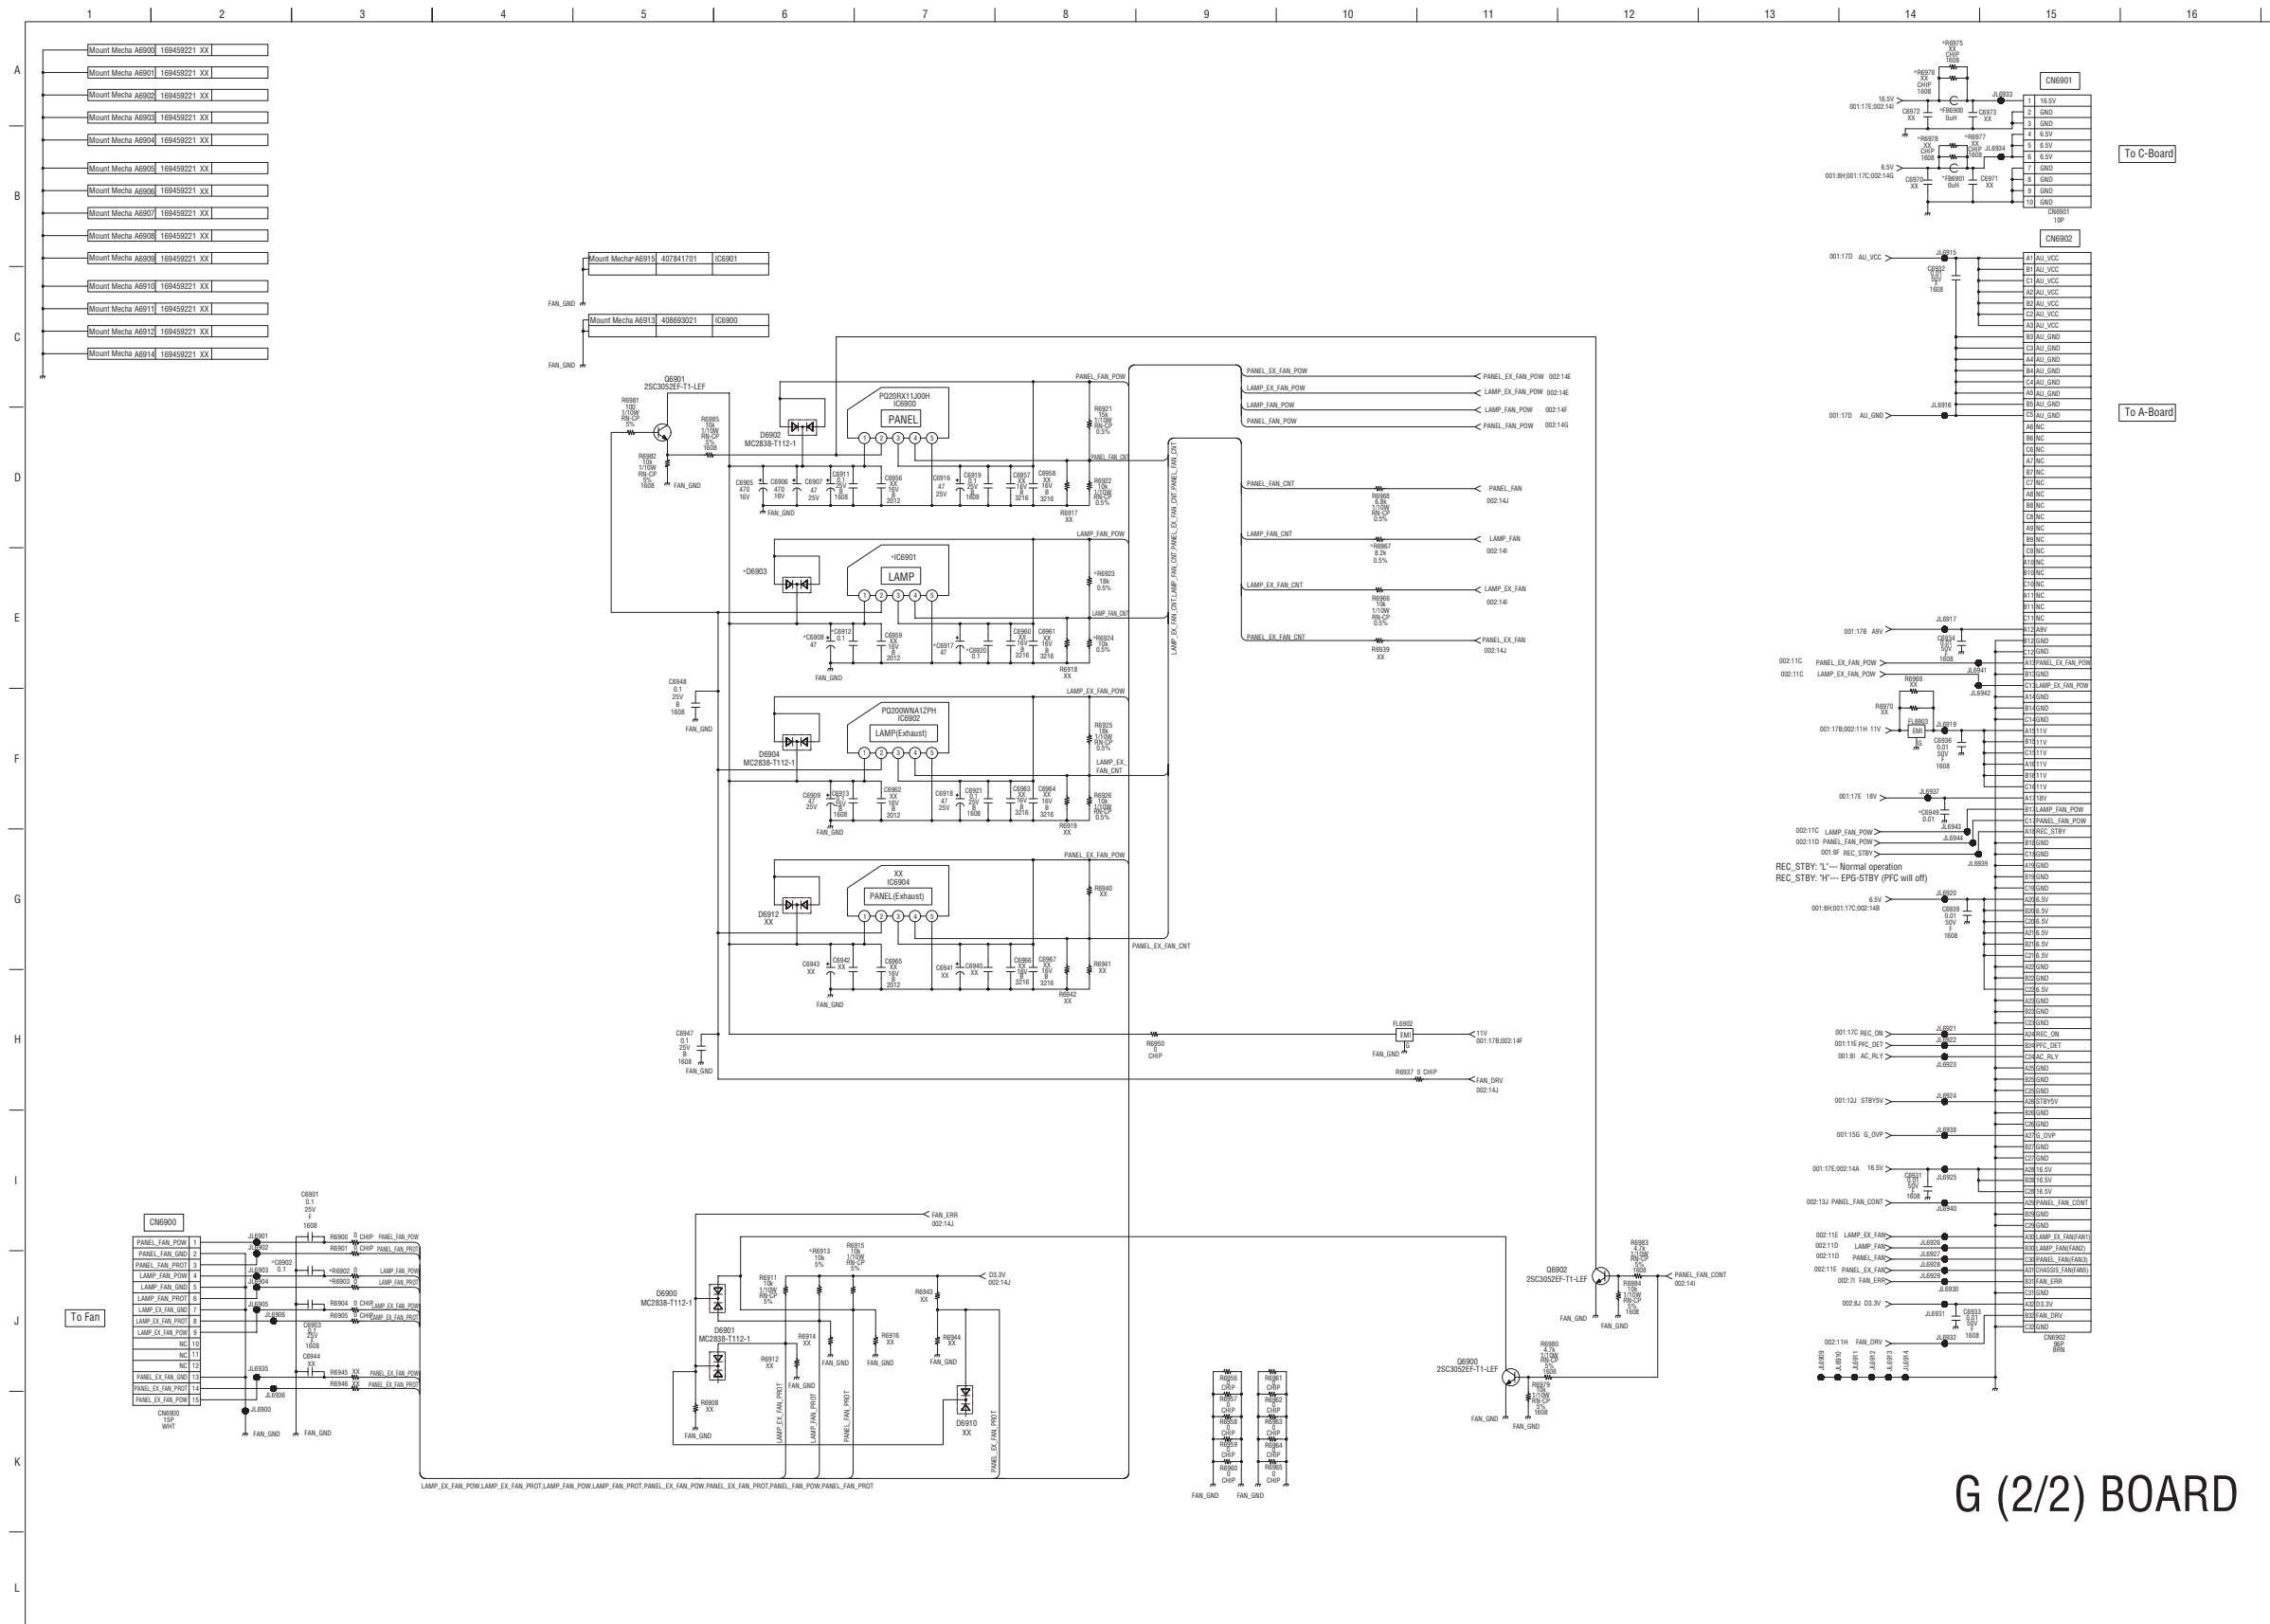


G (2/2) BOARD

(31) Schematic Diagram of H1 Board

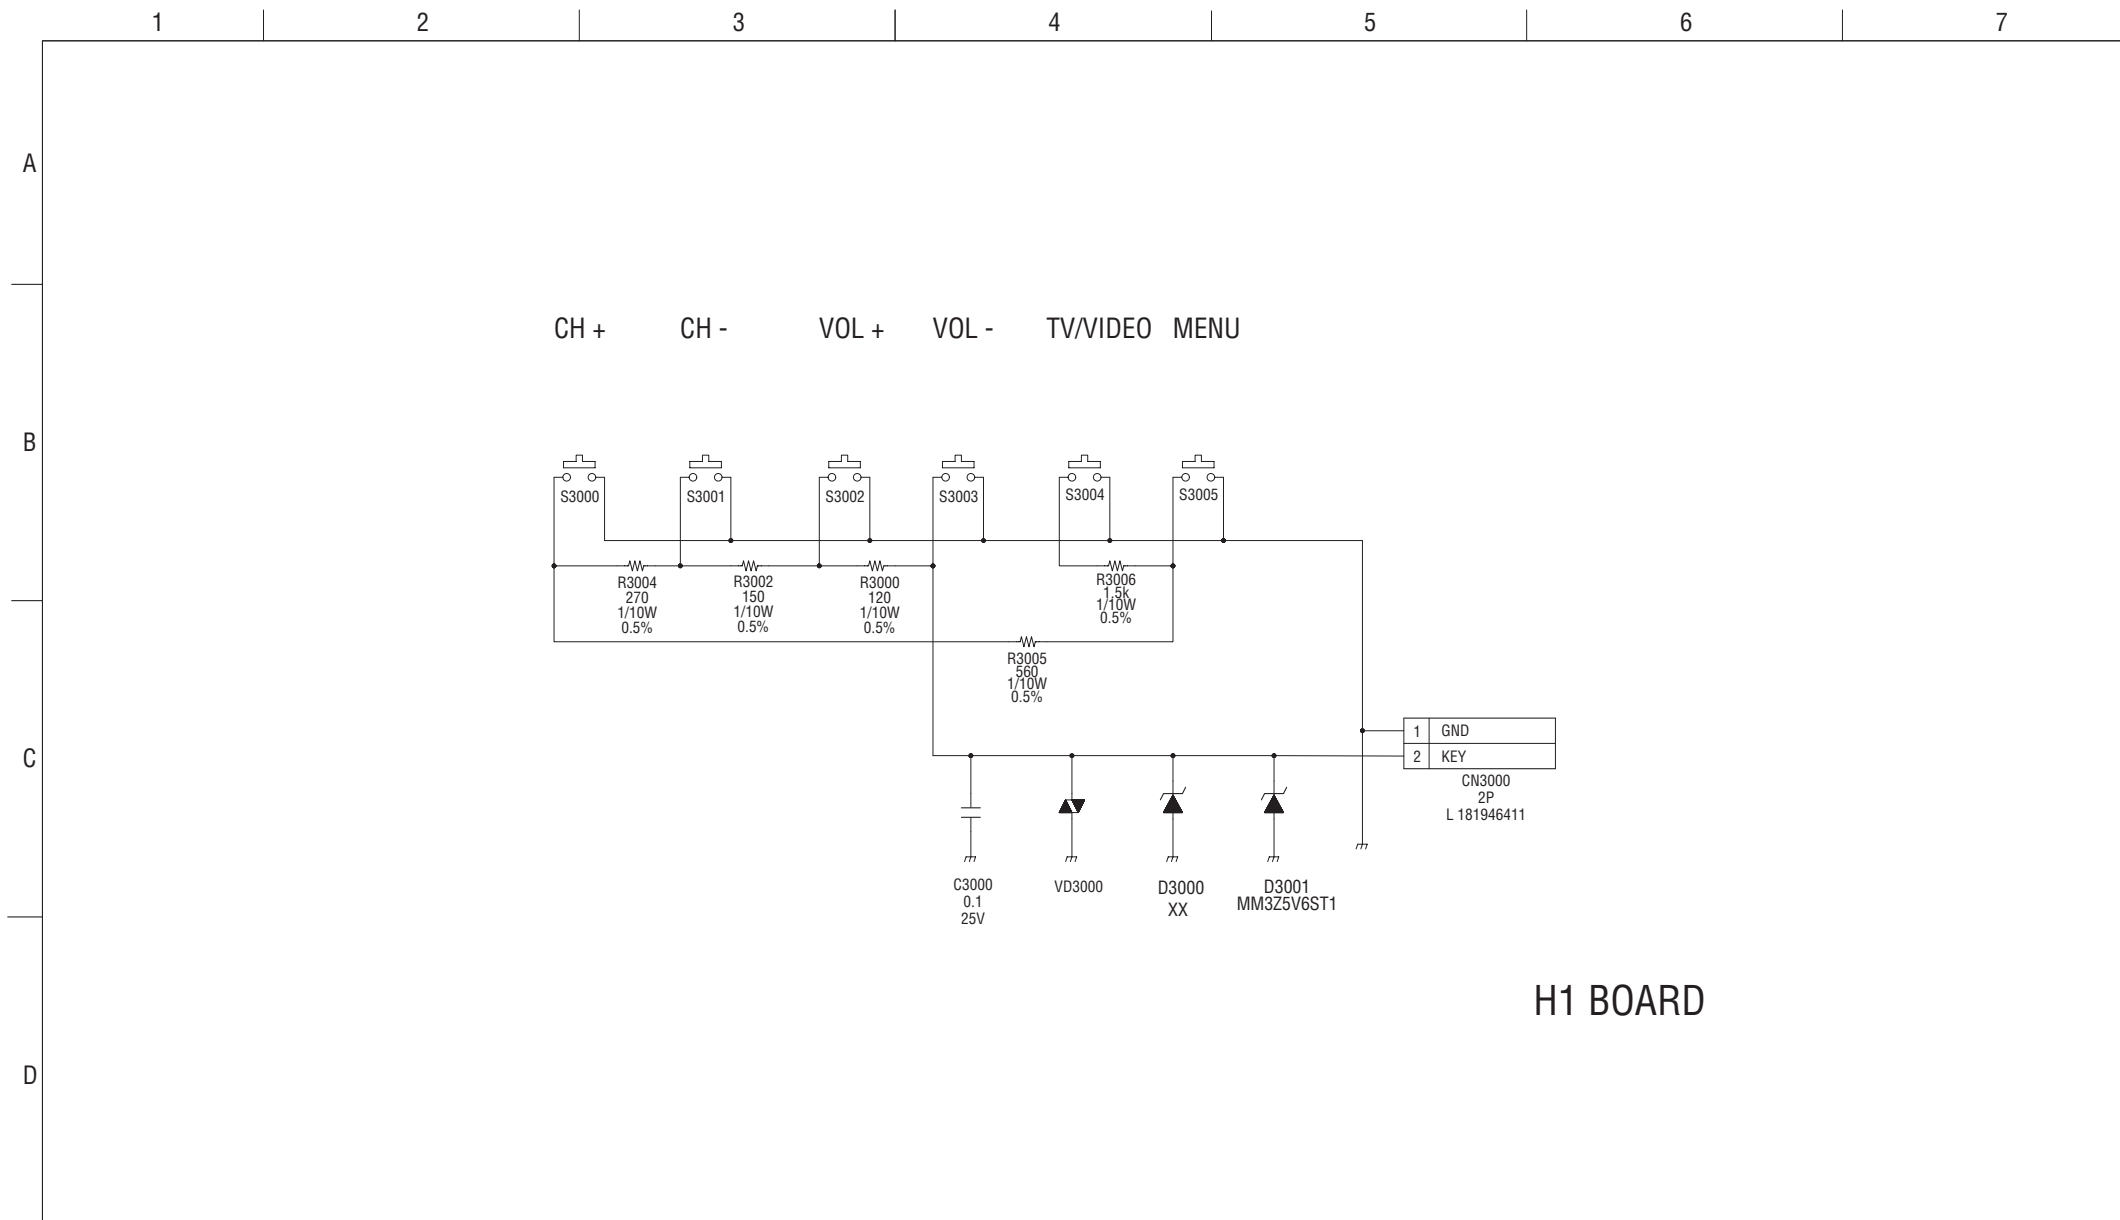


H1 BOARD

(32) Schematic Diagram of H2 Board

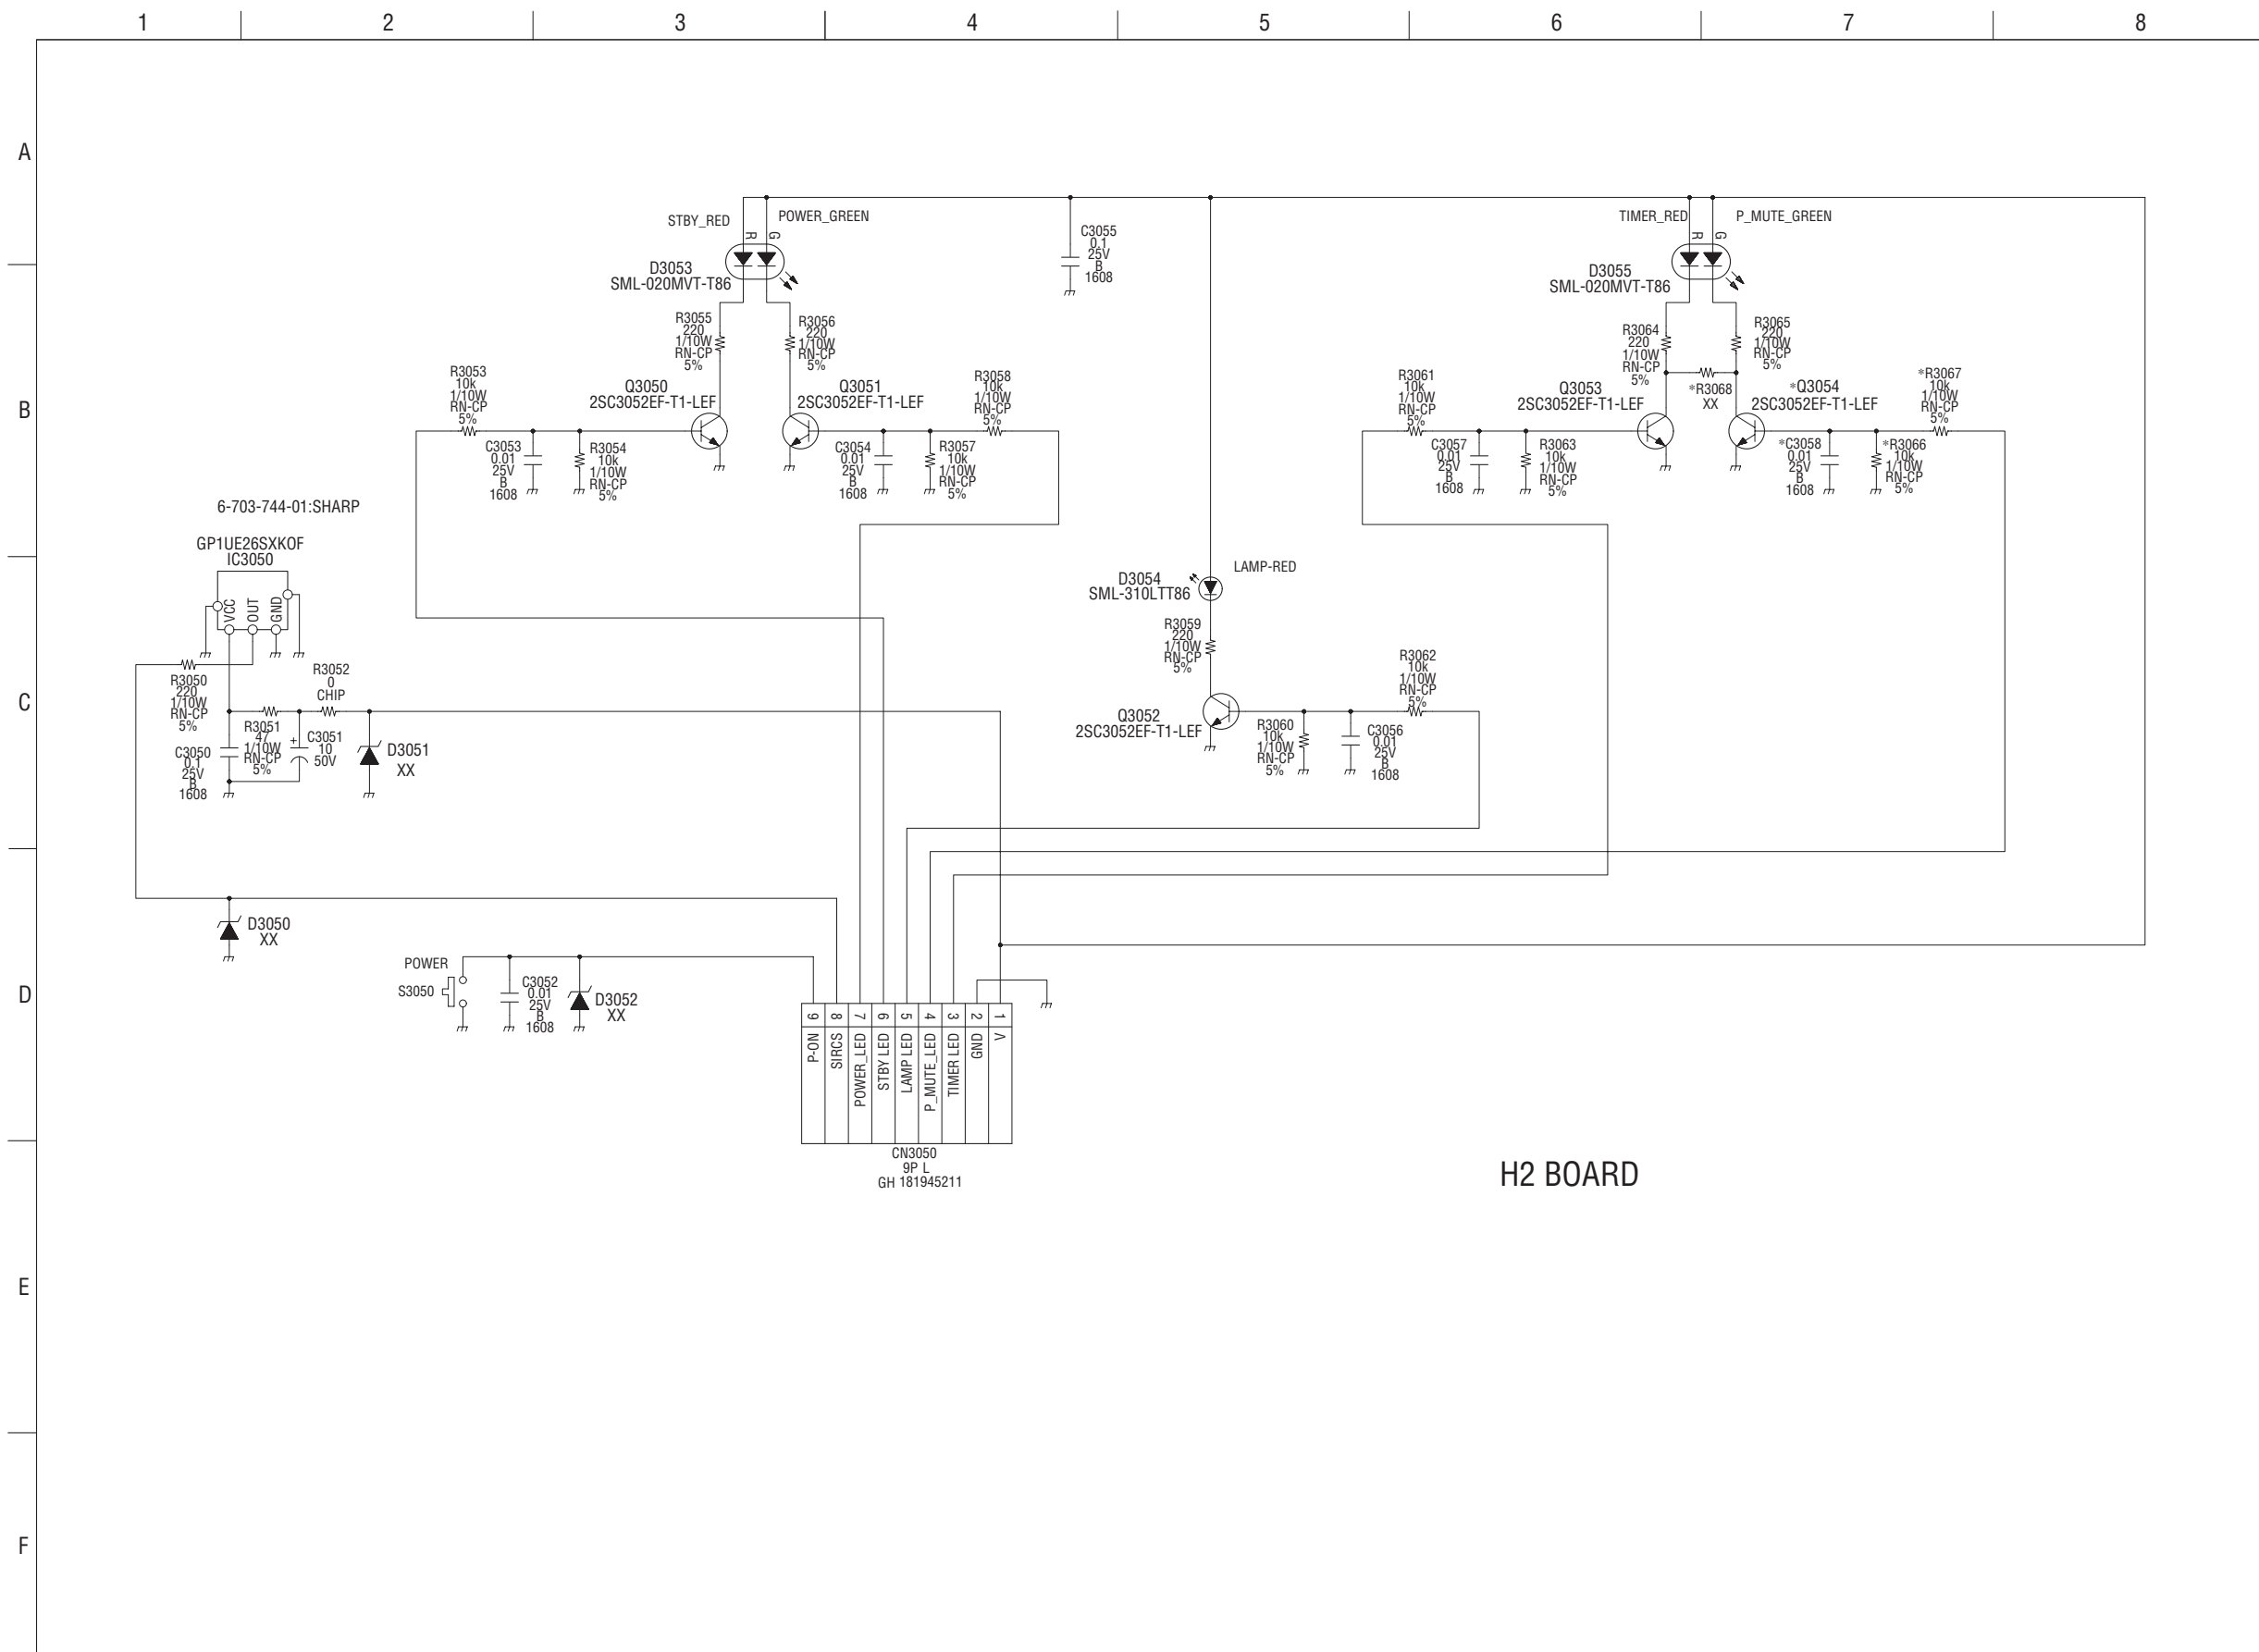

H2 BOARD


(33) Schematic Diagram of H3 Board

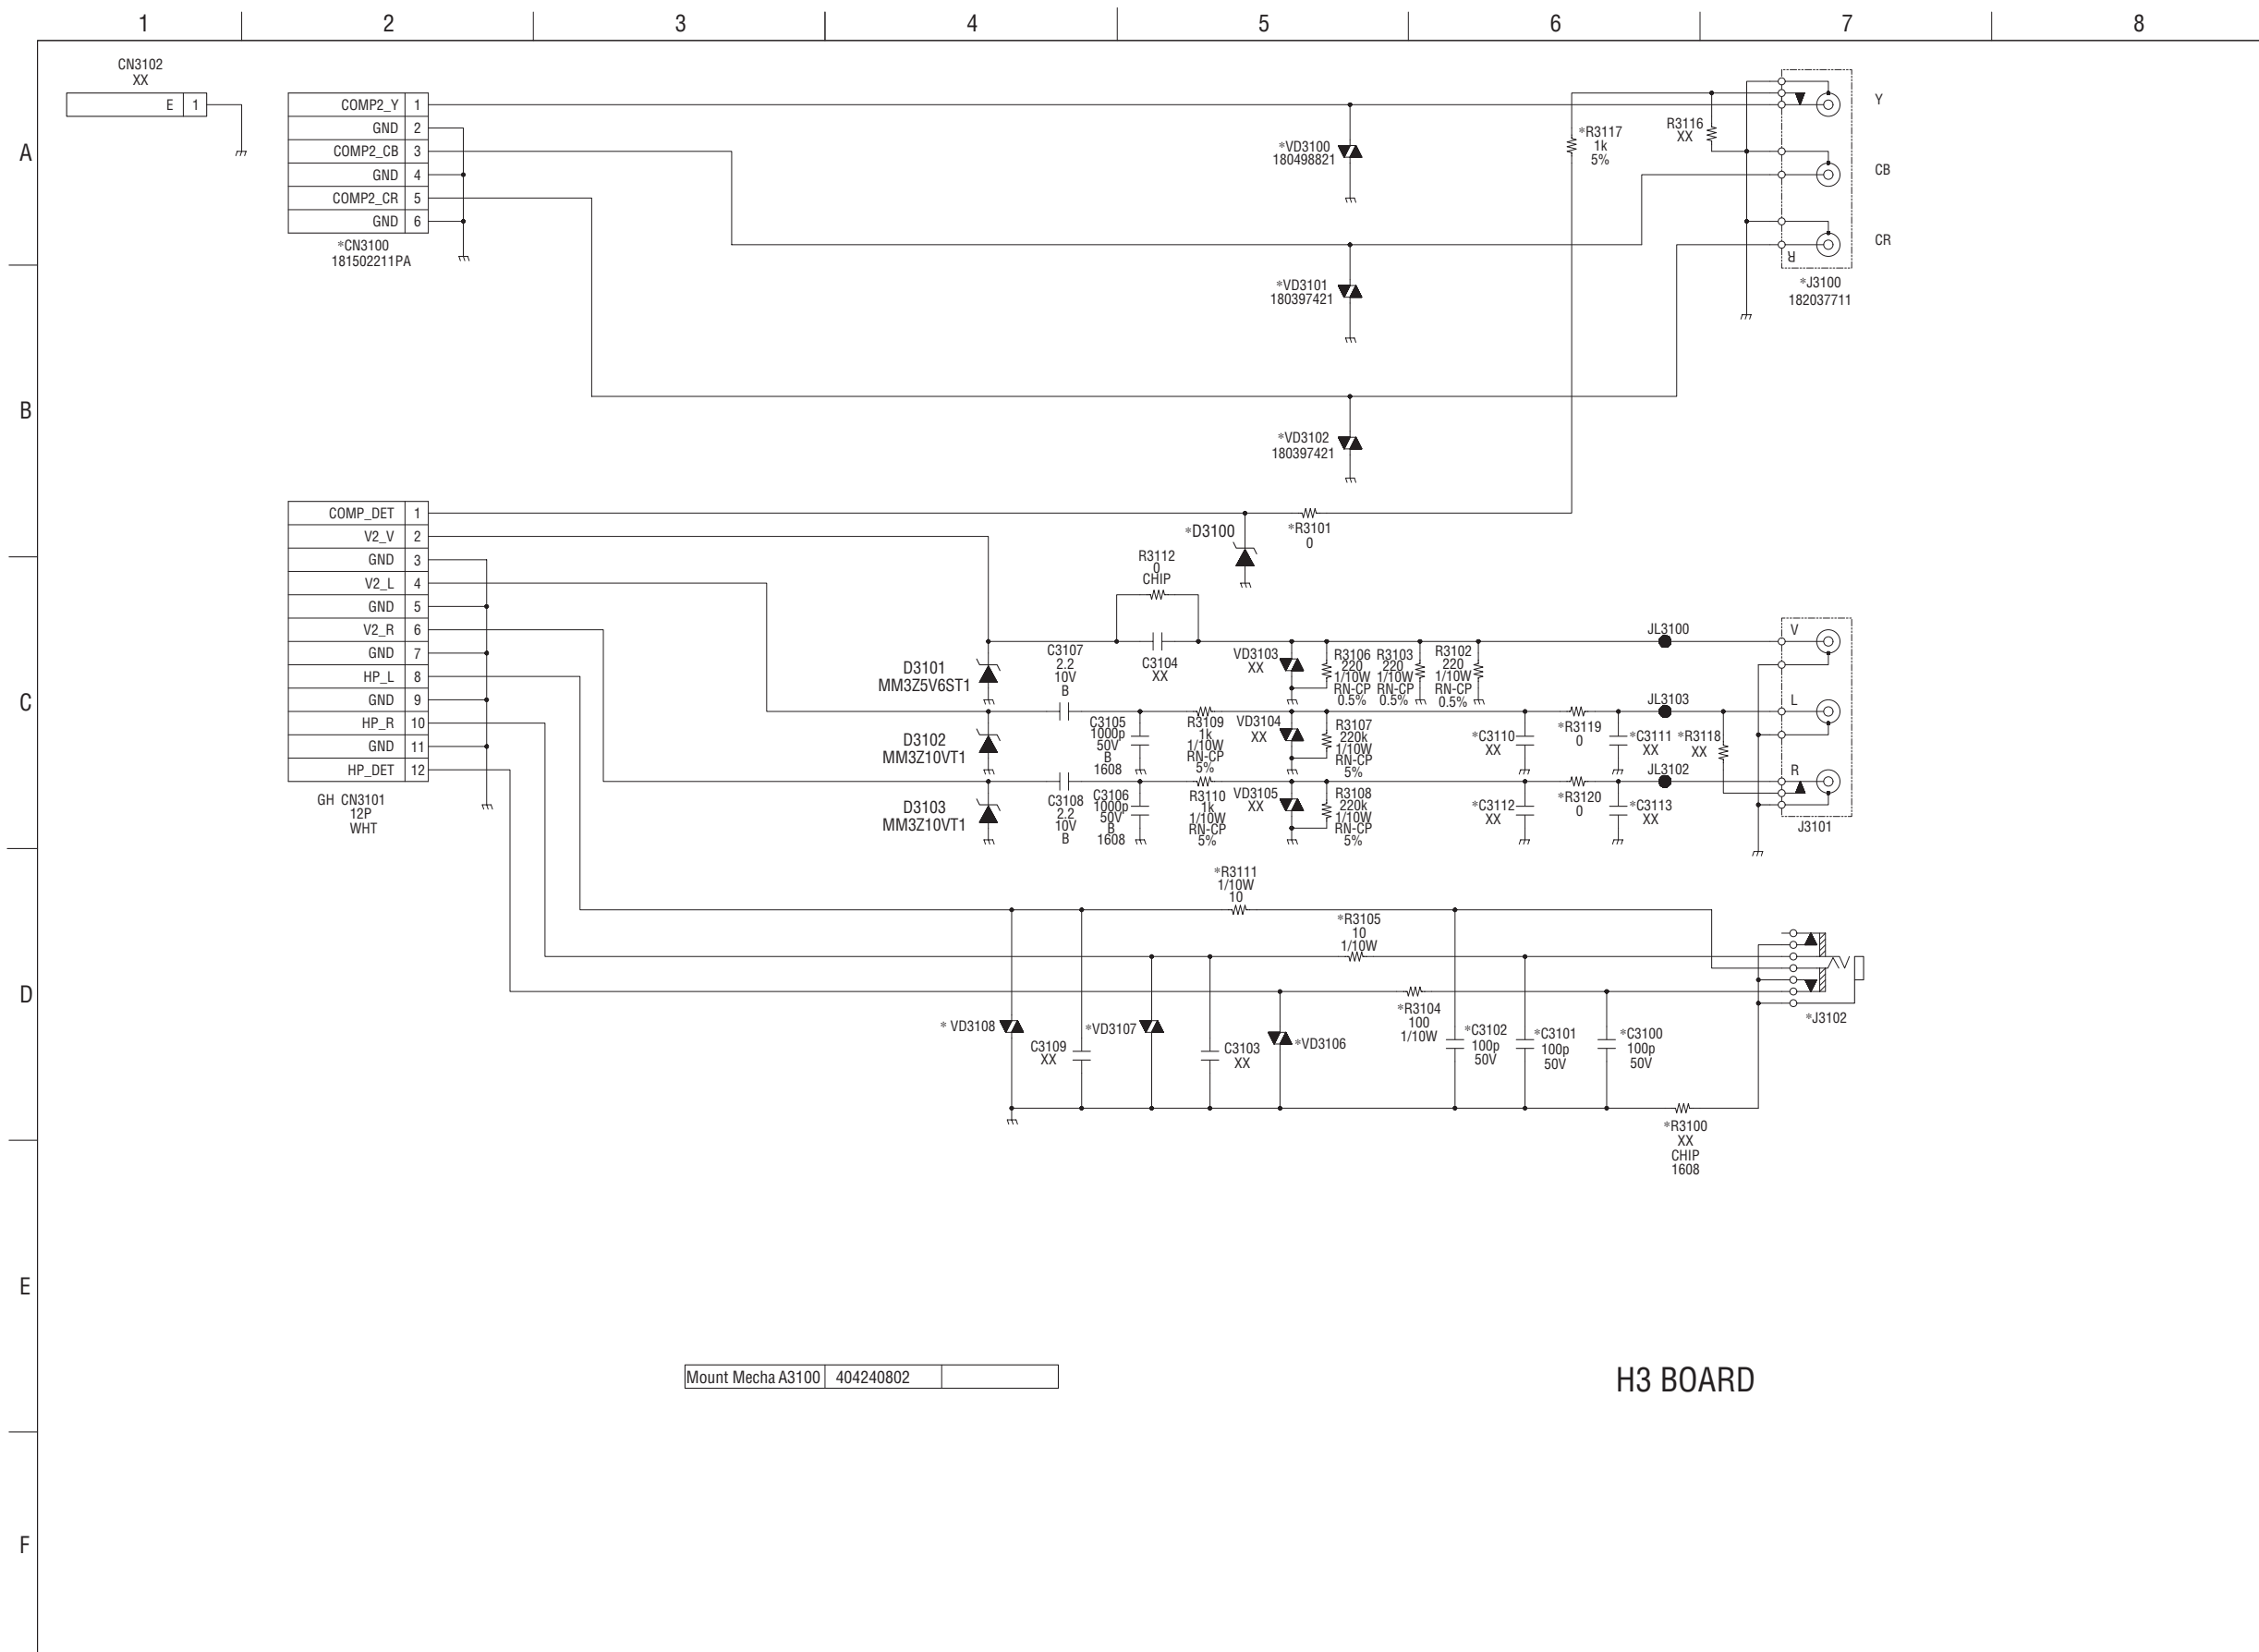

Mount Mecha A3100 404240802

H3 BOARD


(34) Schematic Diagram of QM (1/6) Board

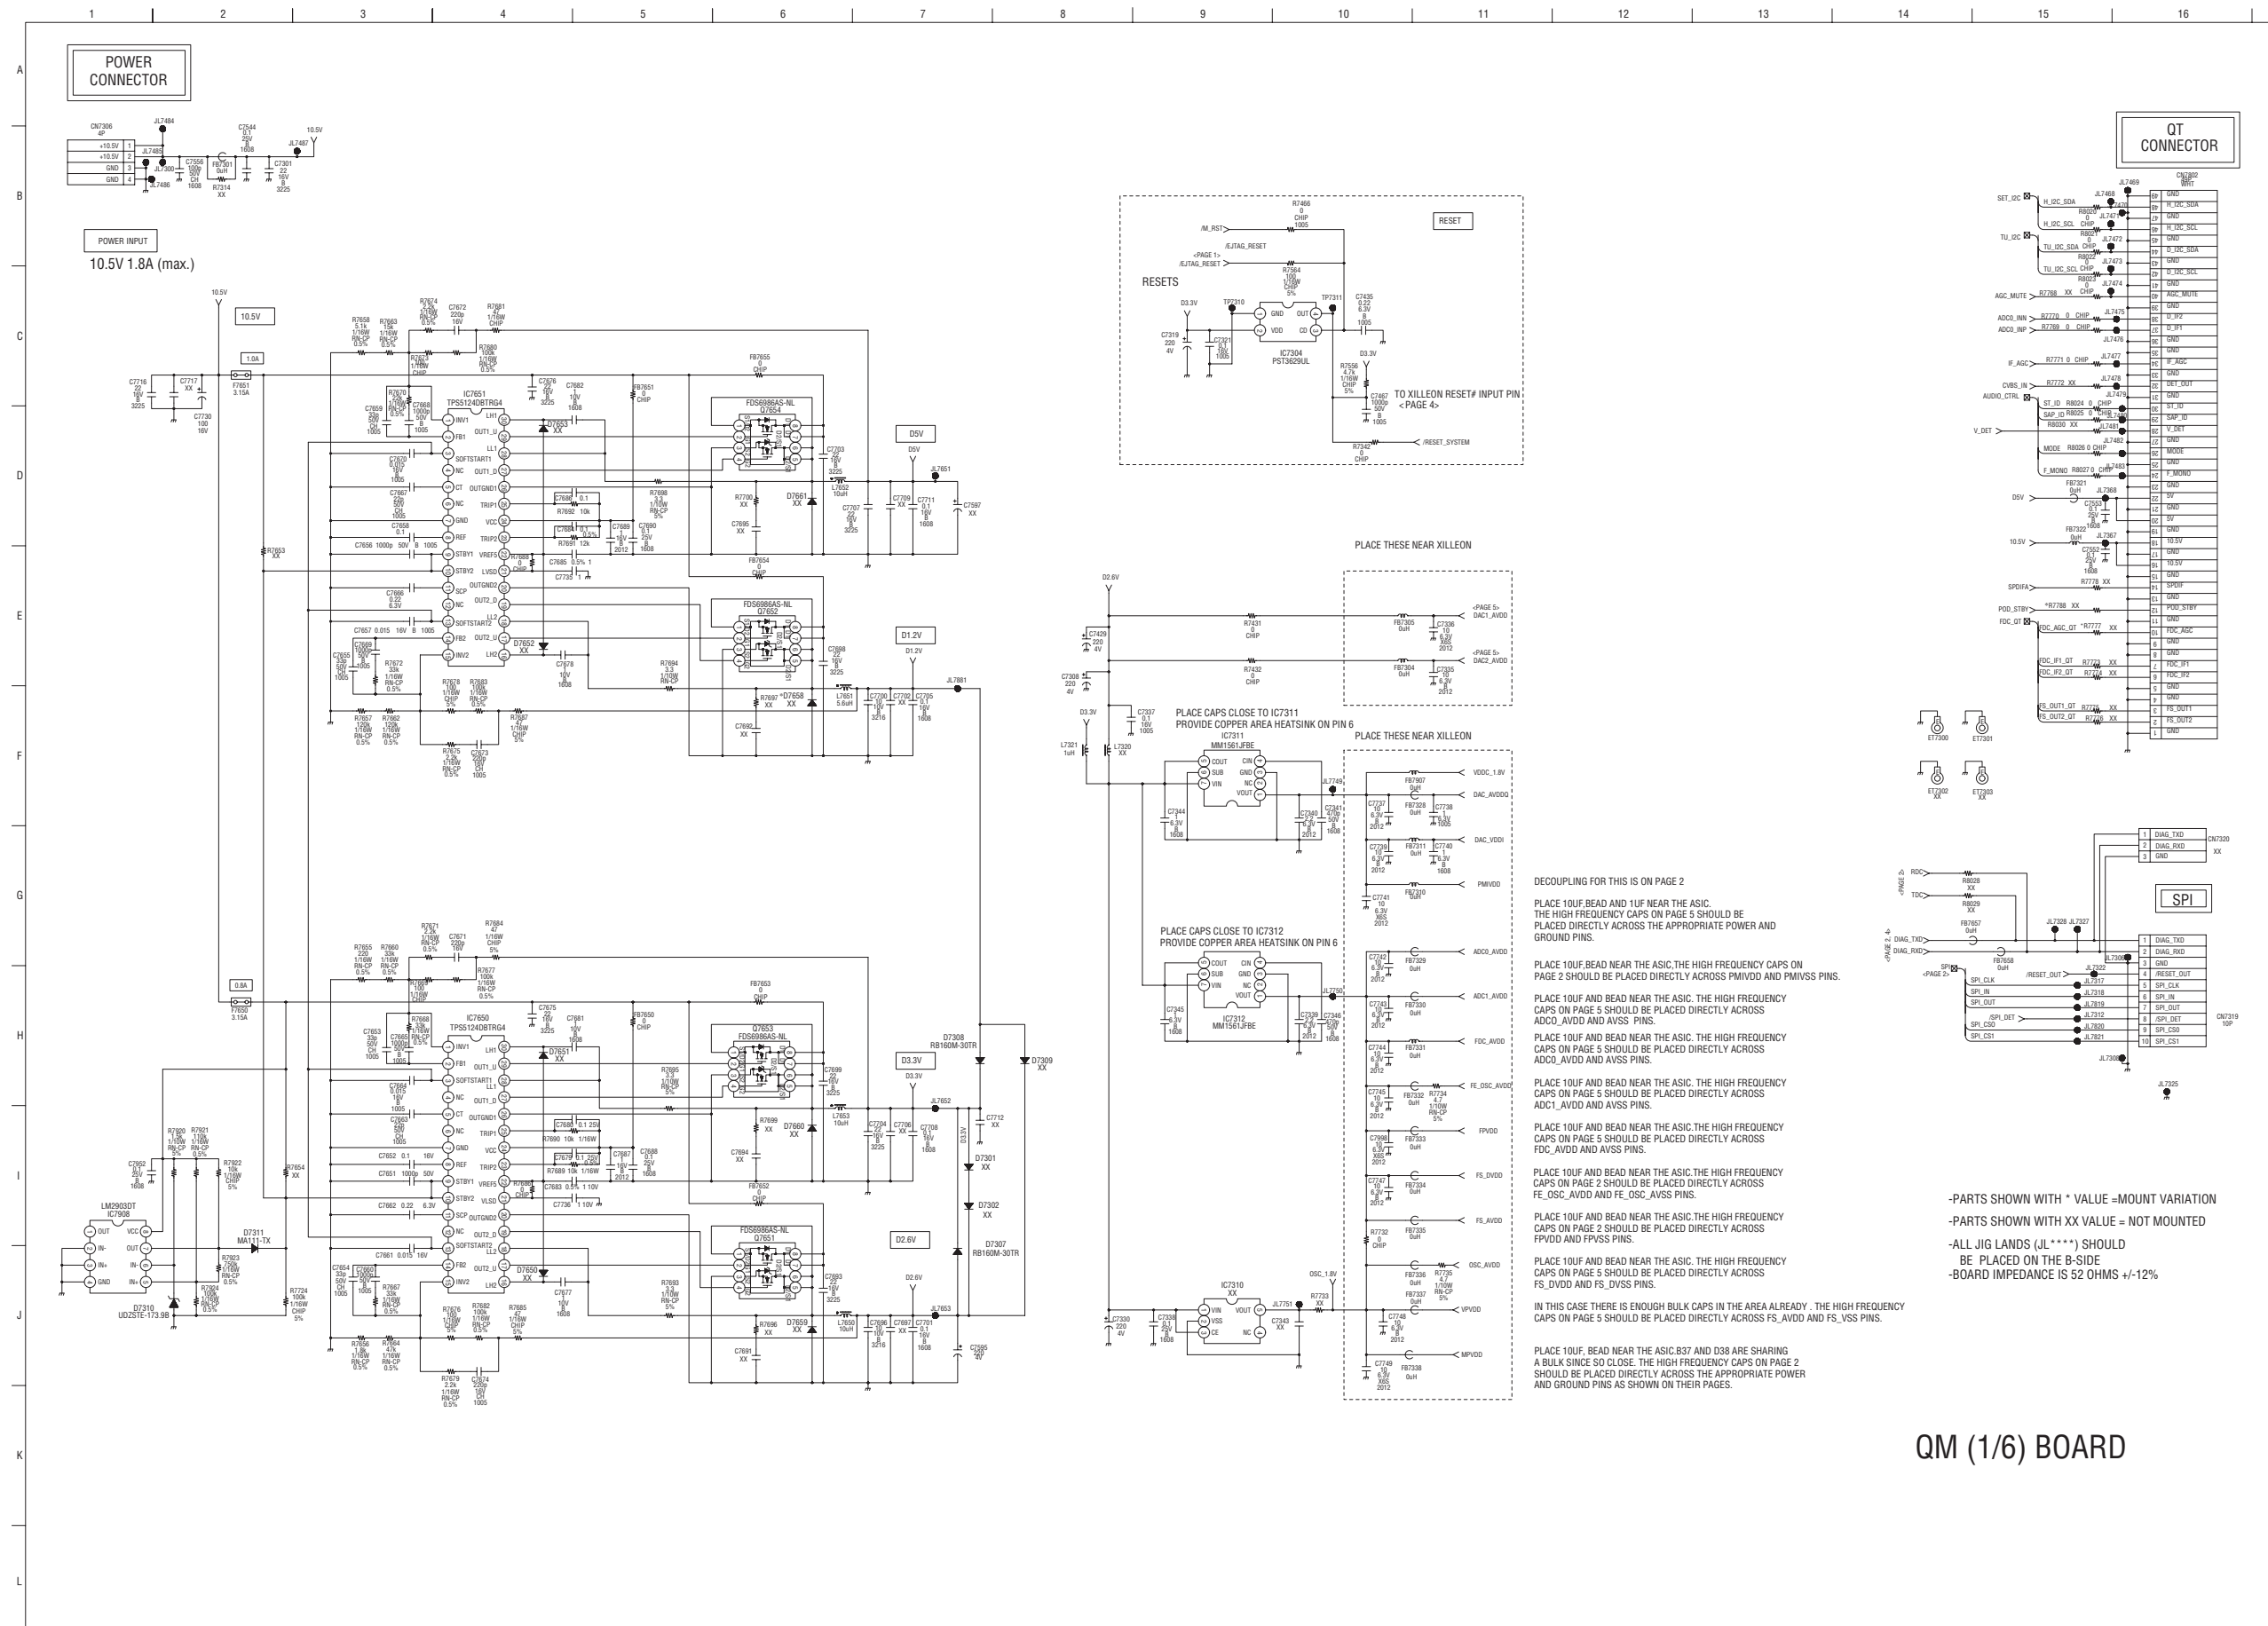

QM (1/6) BOARD




(35) Schematic Diagram of QM (2/6) Board

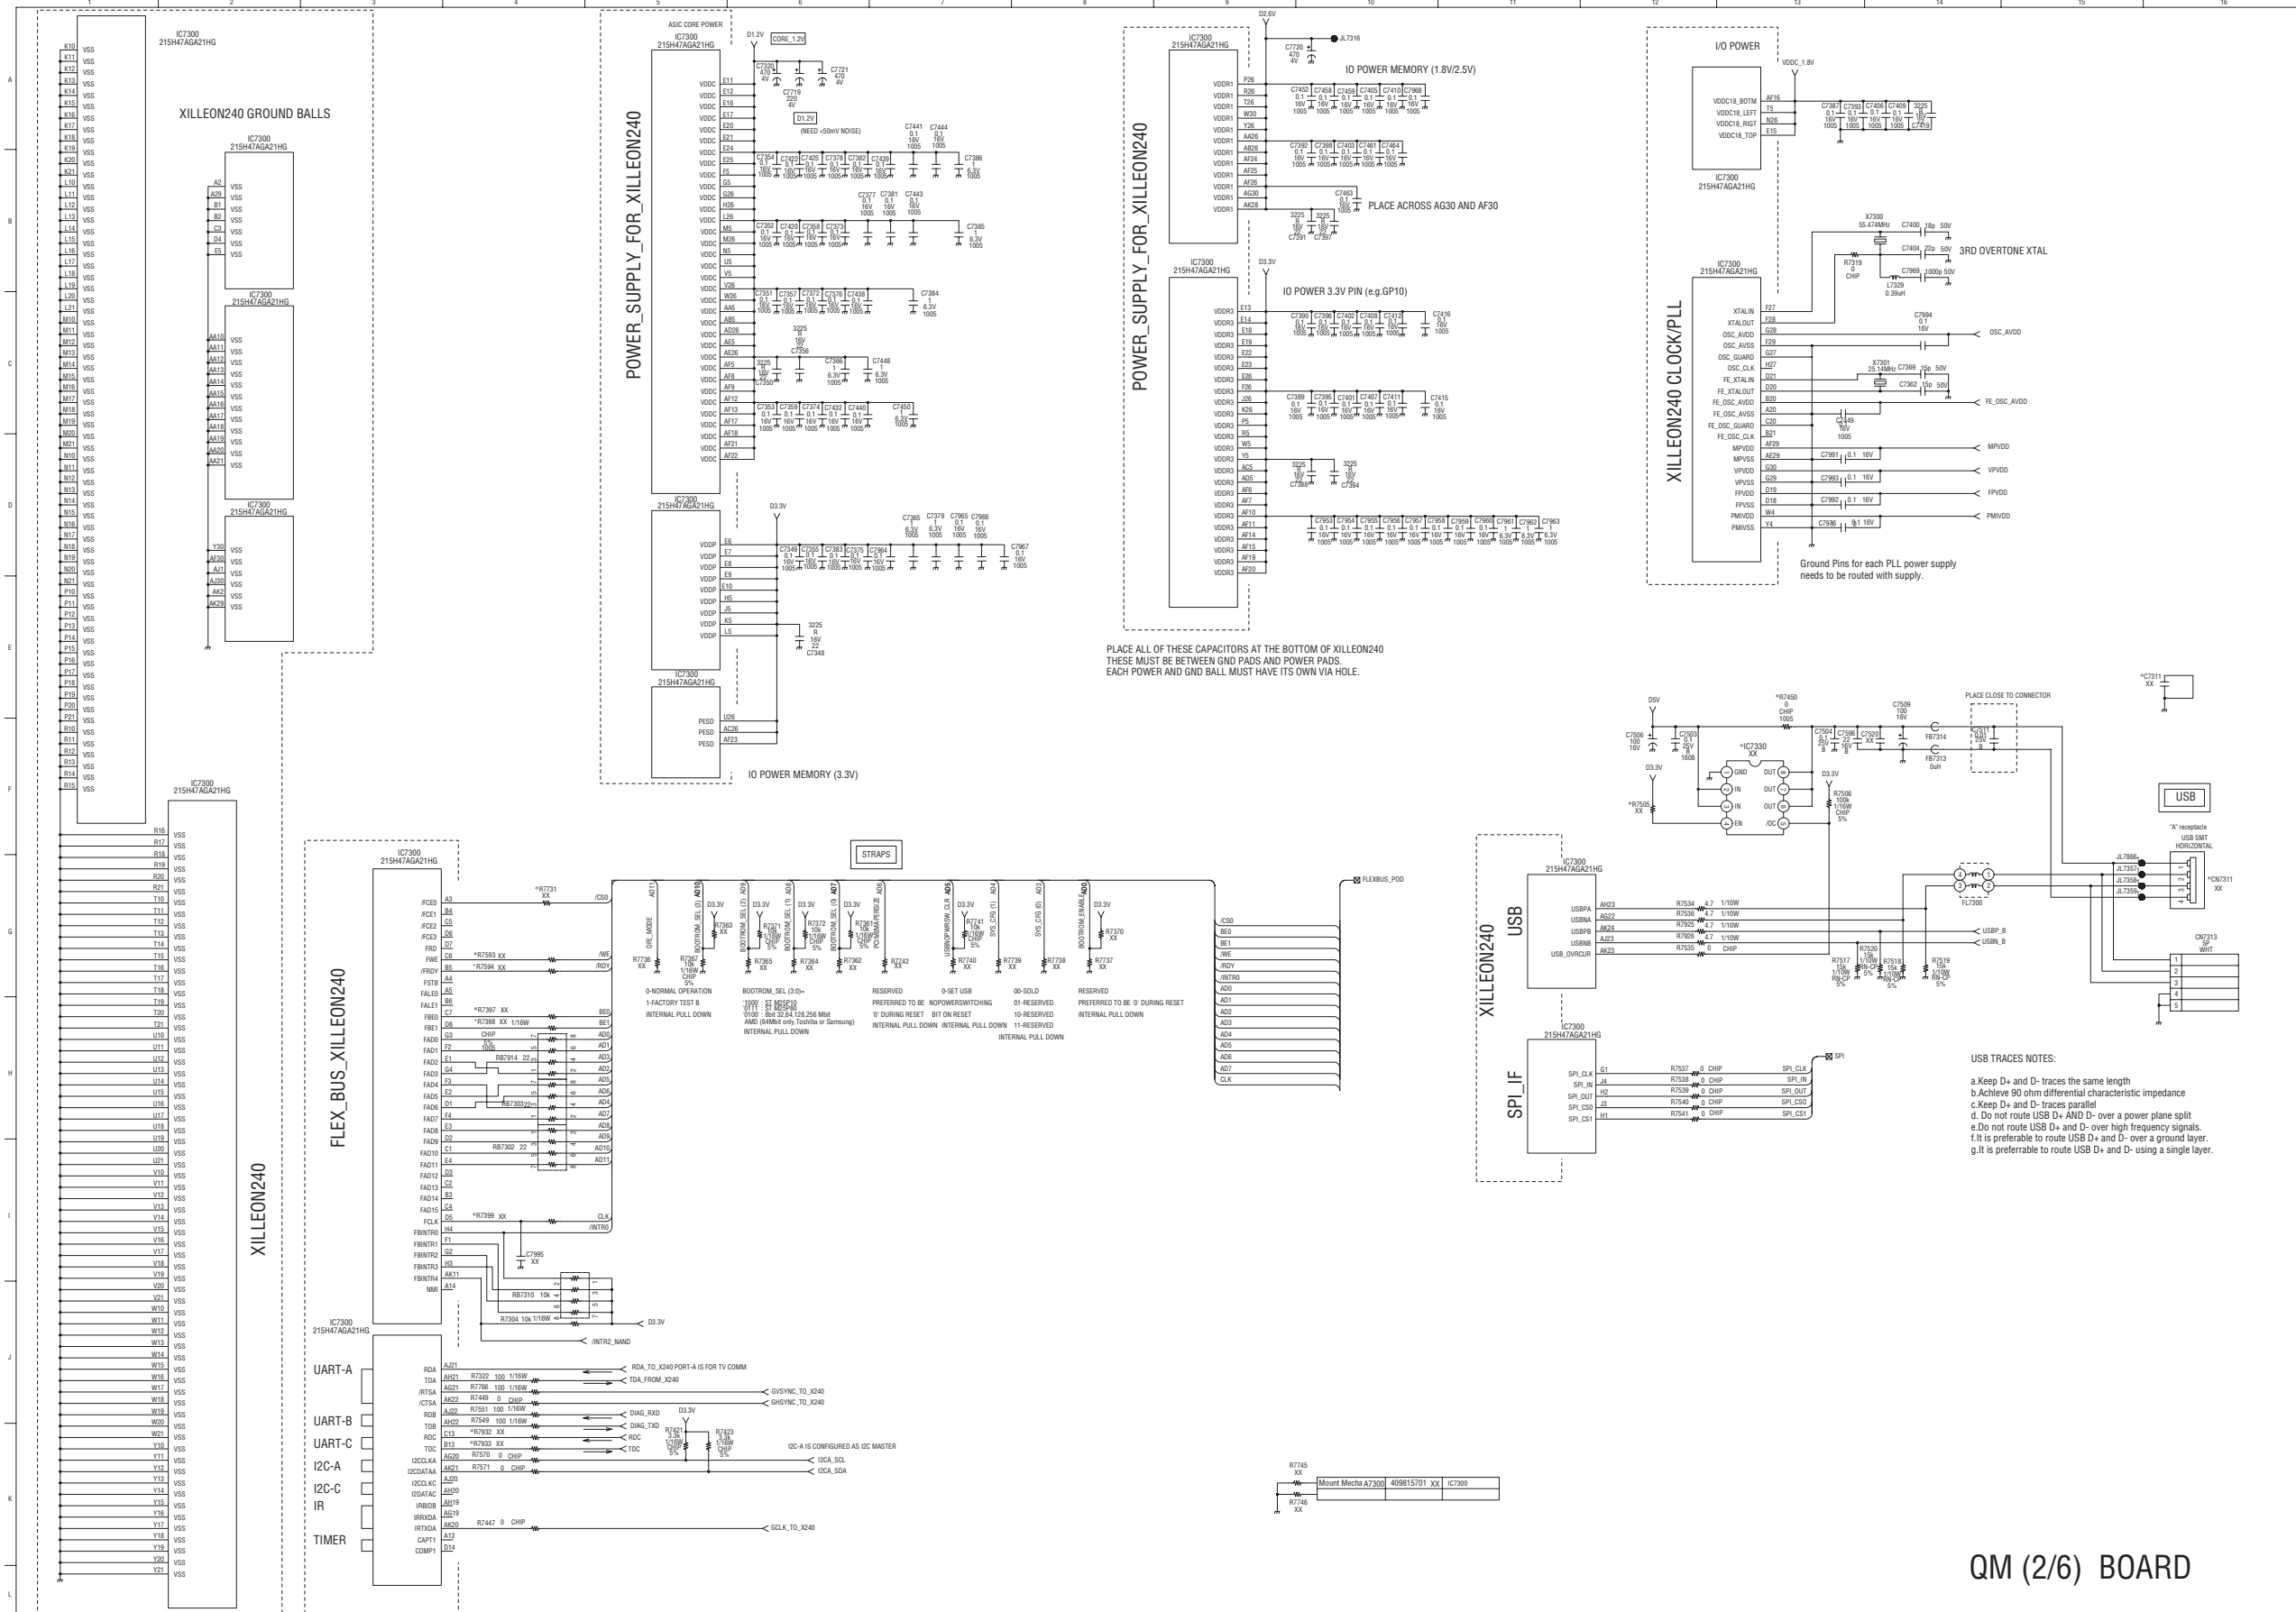


QM (2/6) BOARD


(36) Schematic Diagram of QM (3/6) Board

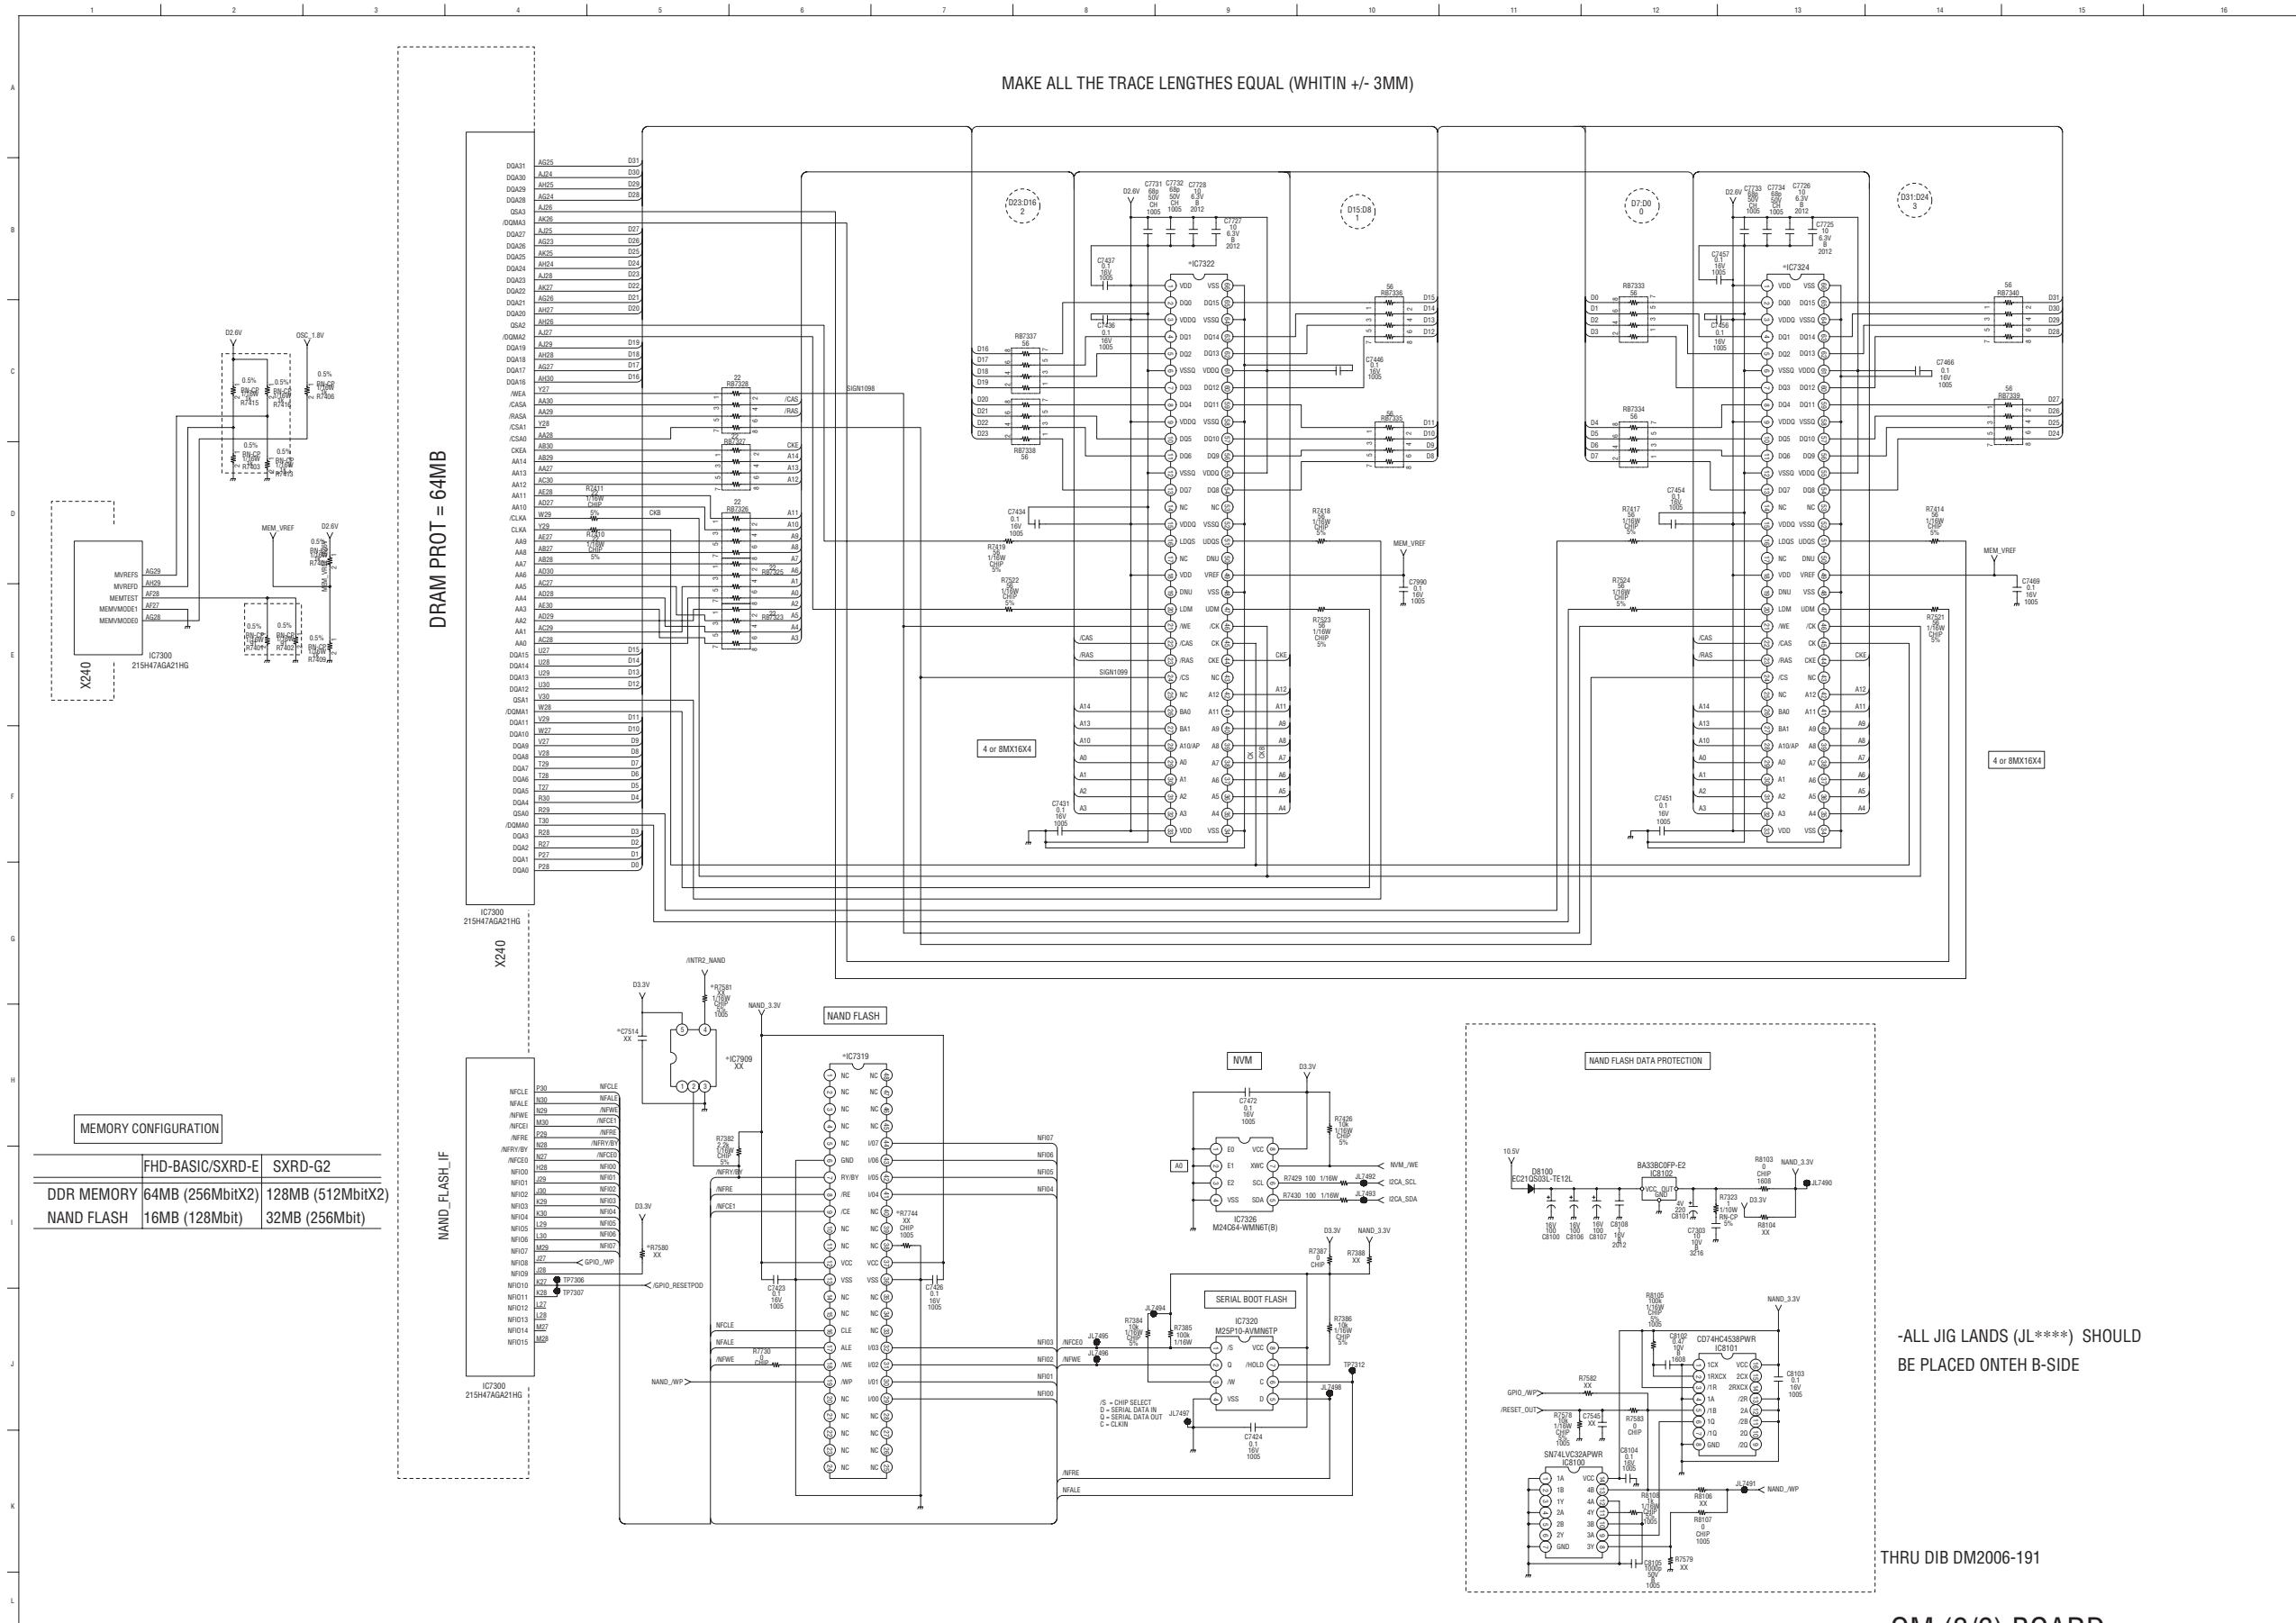

(37) Schematic Diagram of QM (4/6) Board

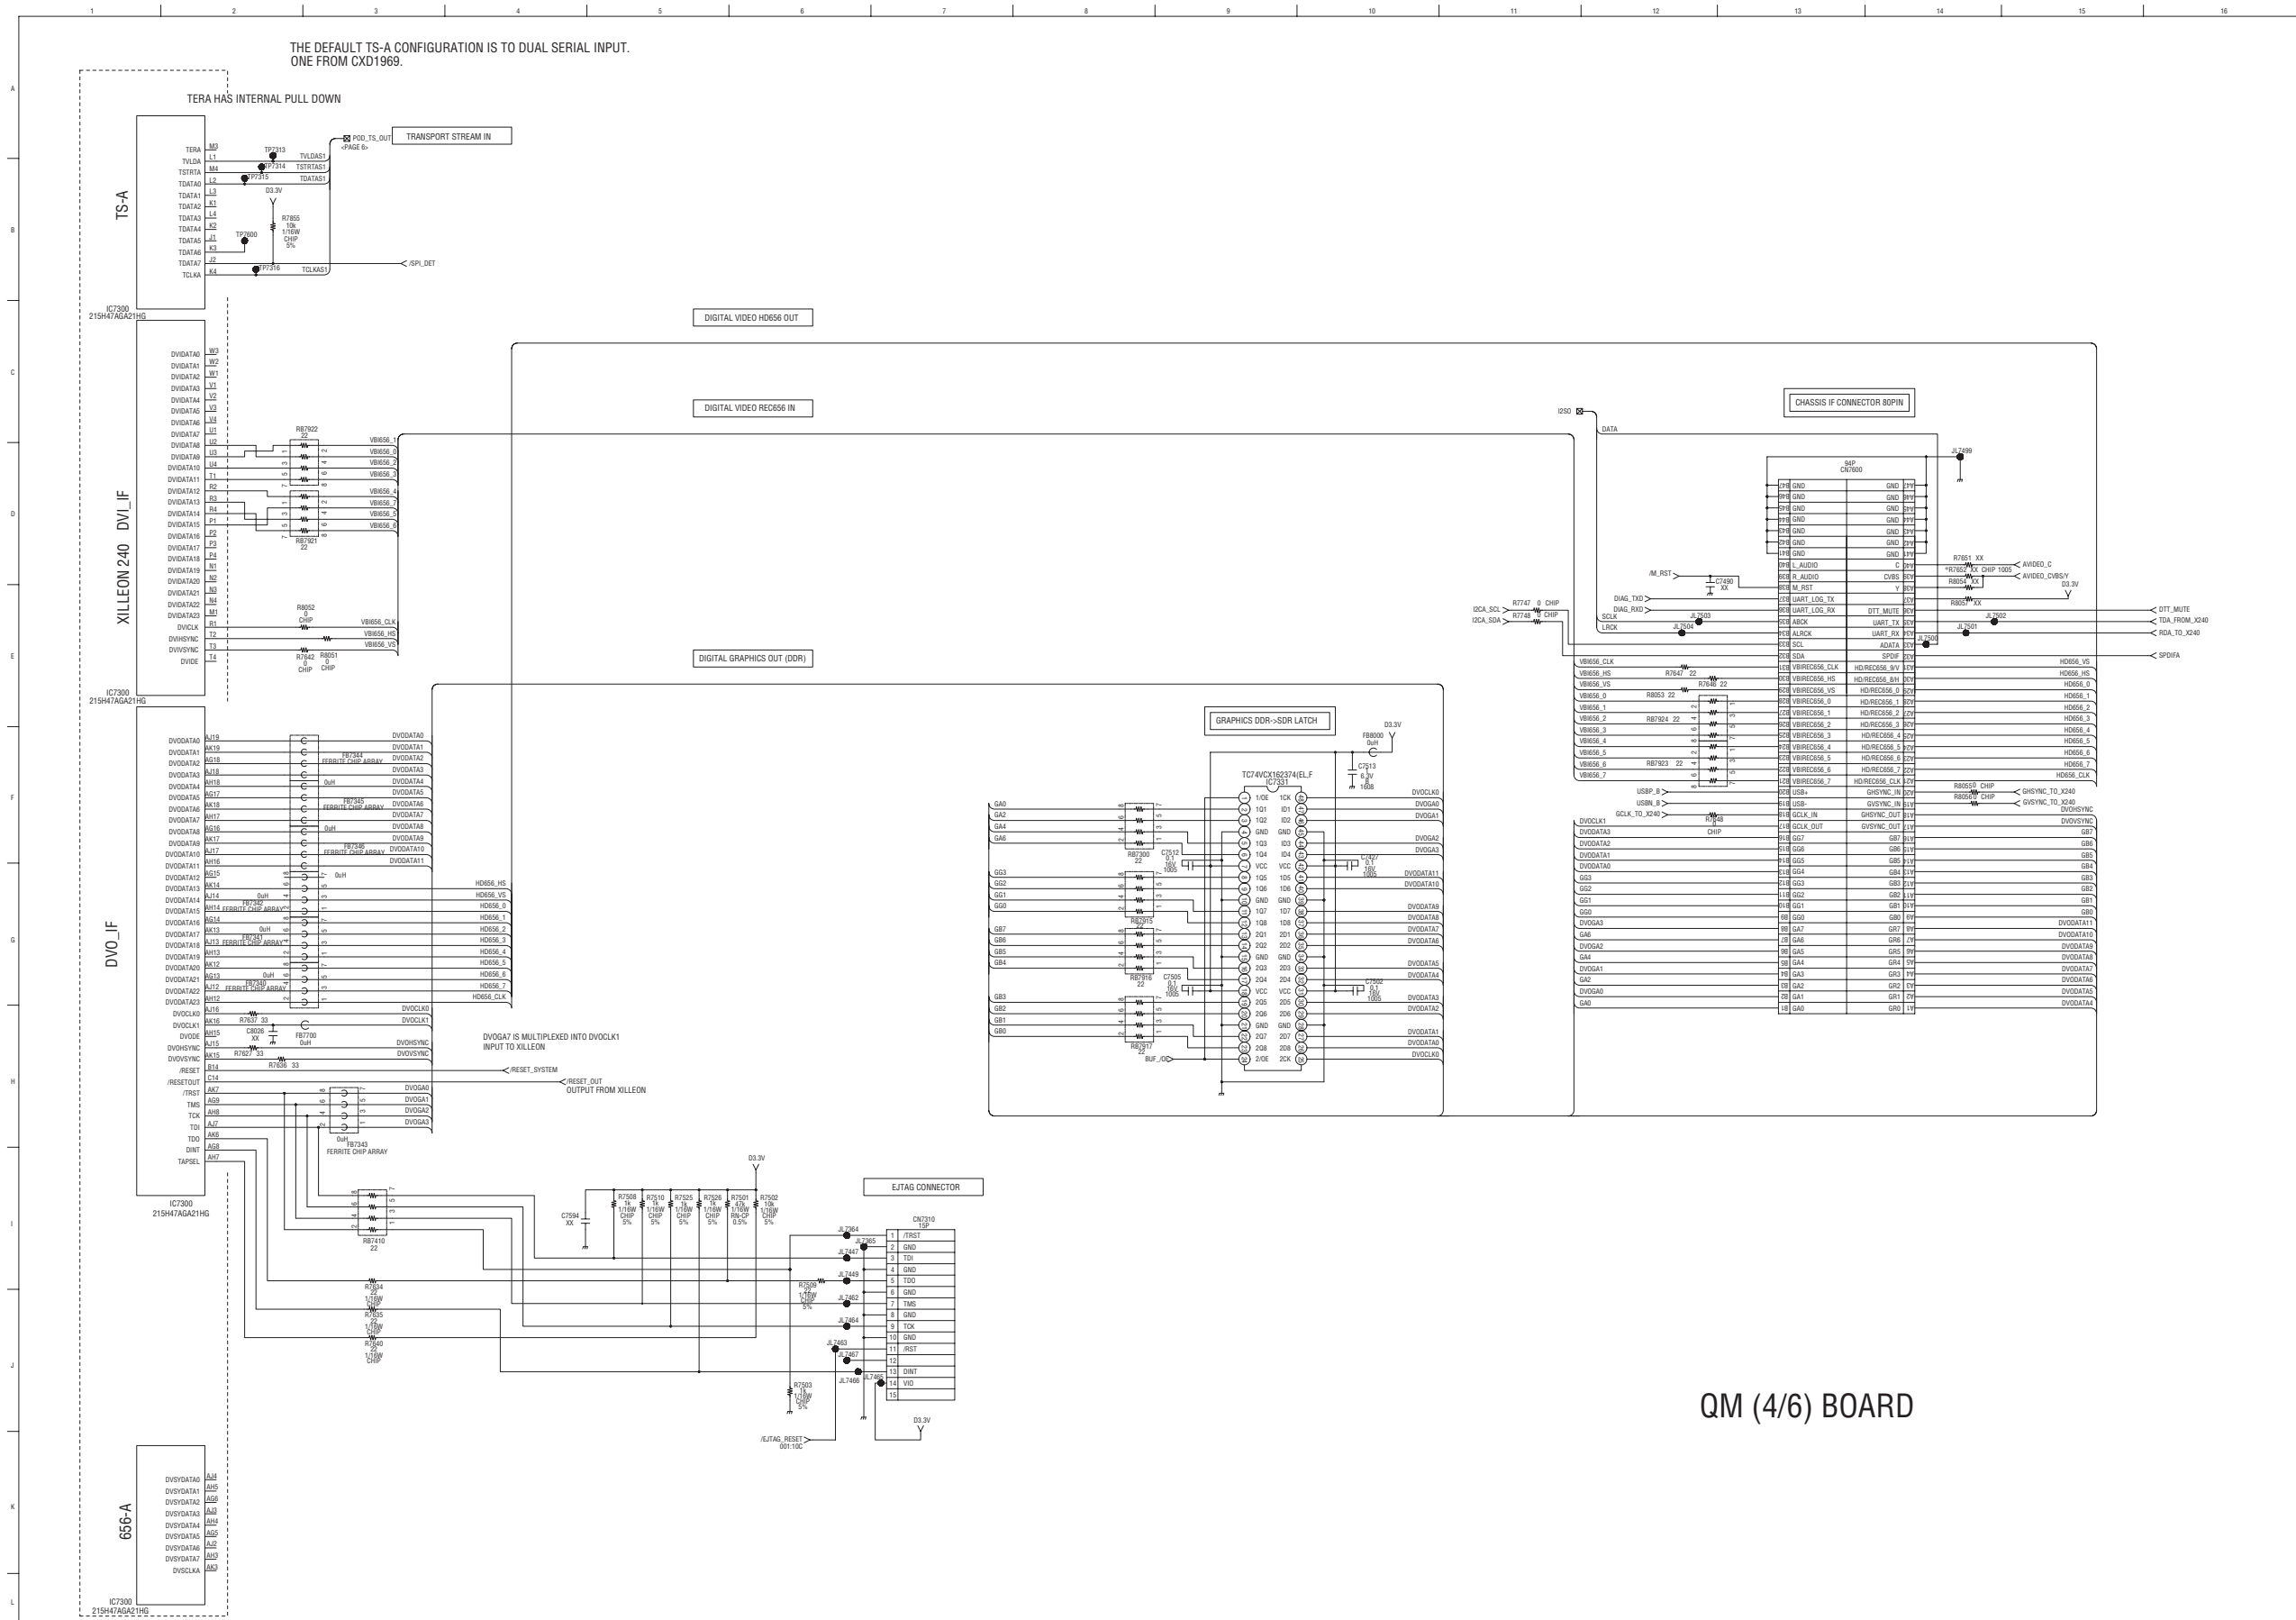


(38) Schematic Diagram of QM (5/6) Board

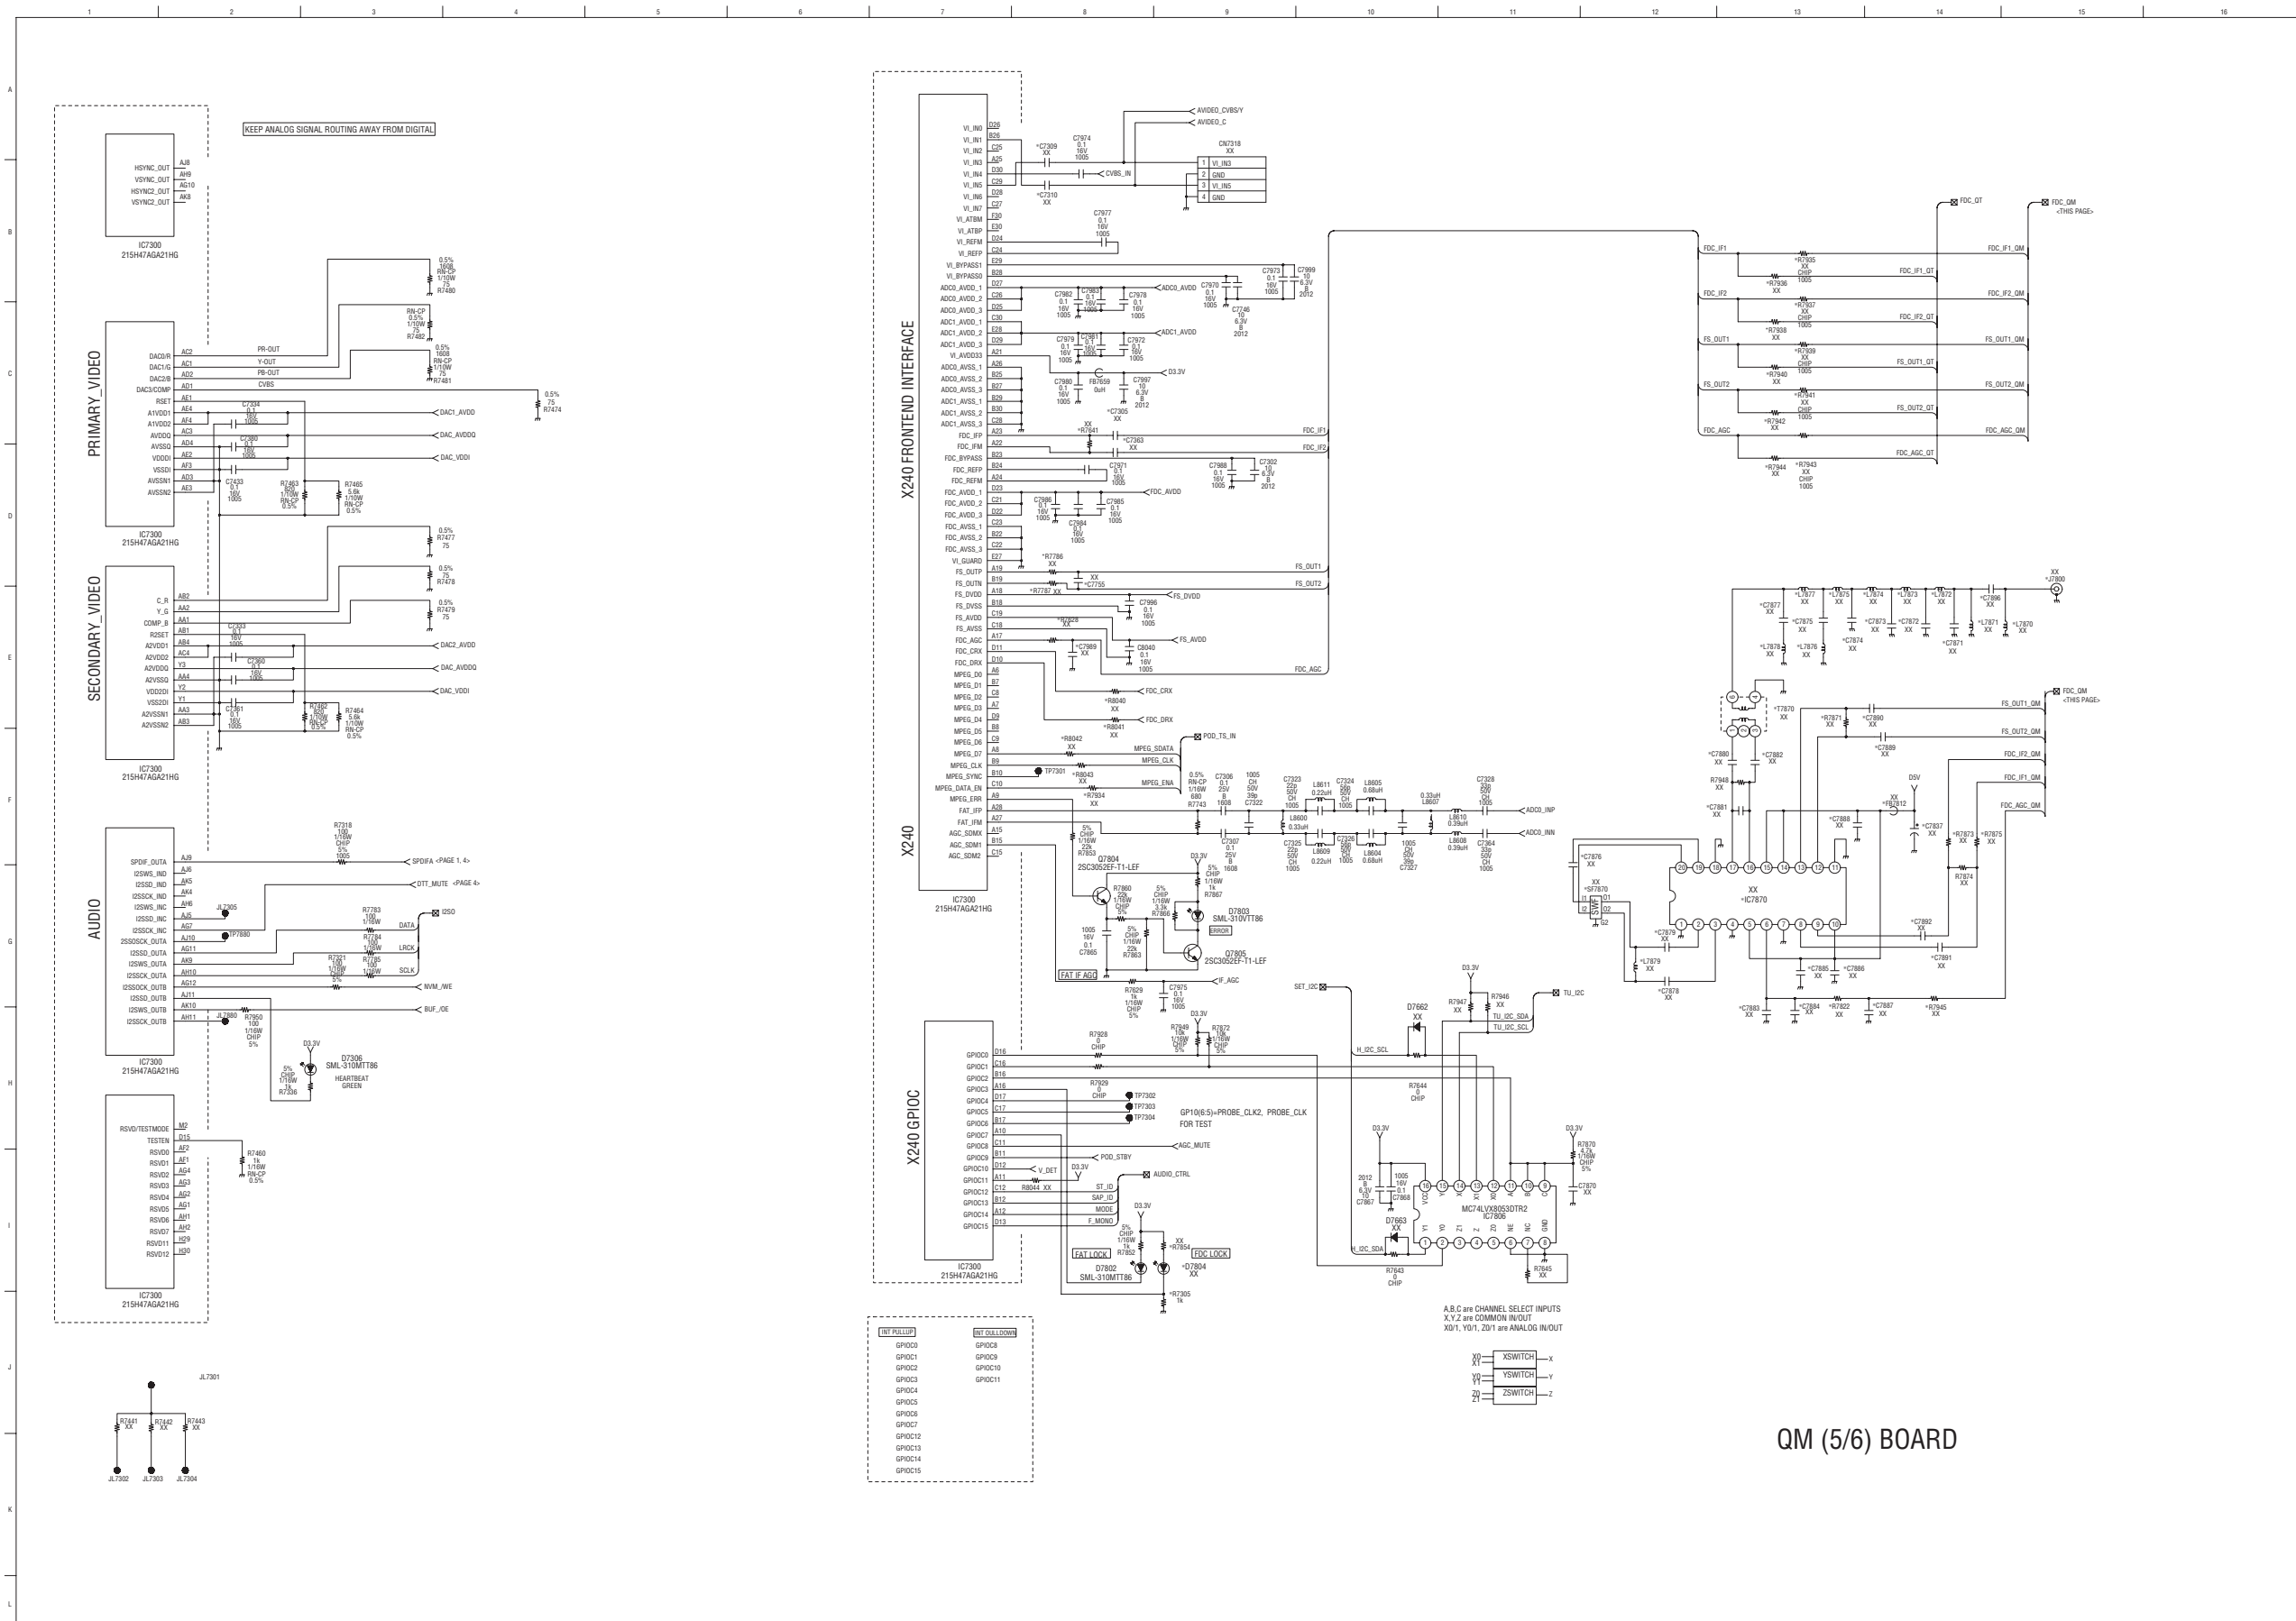


QM (5/6) BOARD

(39) Schematic Diagram of QM (6/6) Board


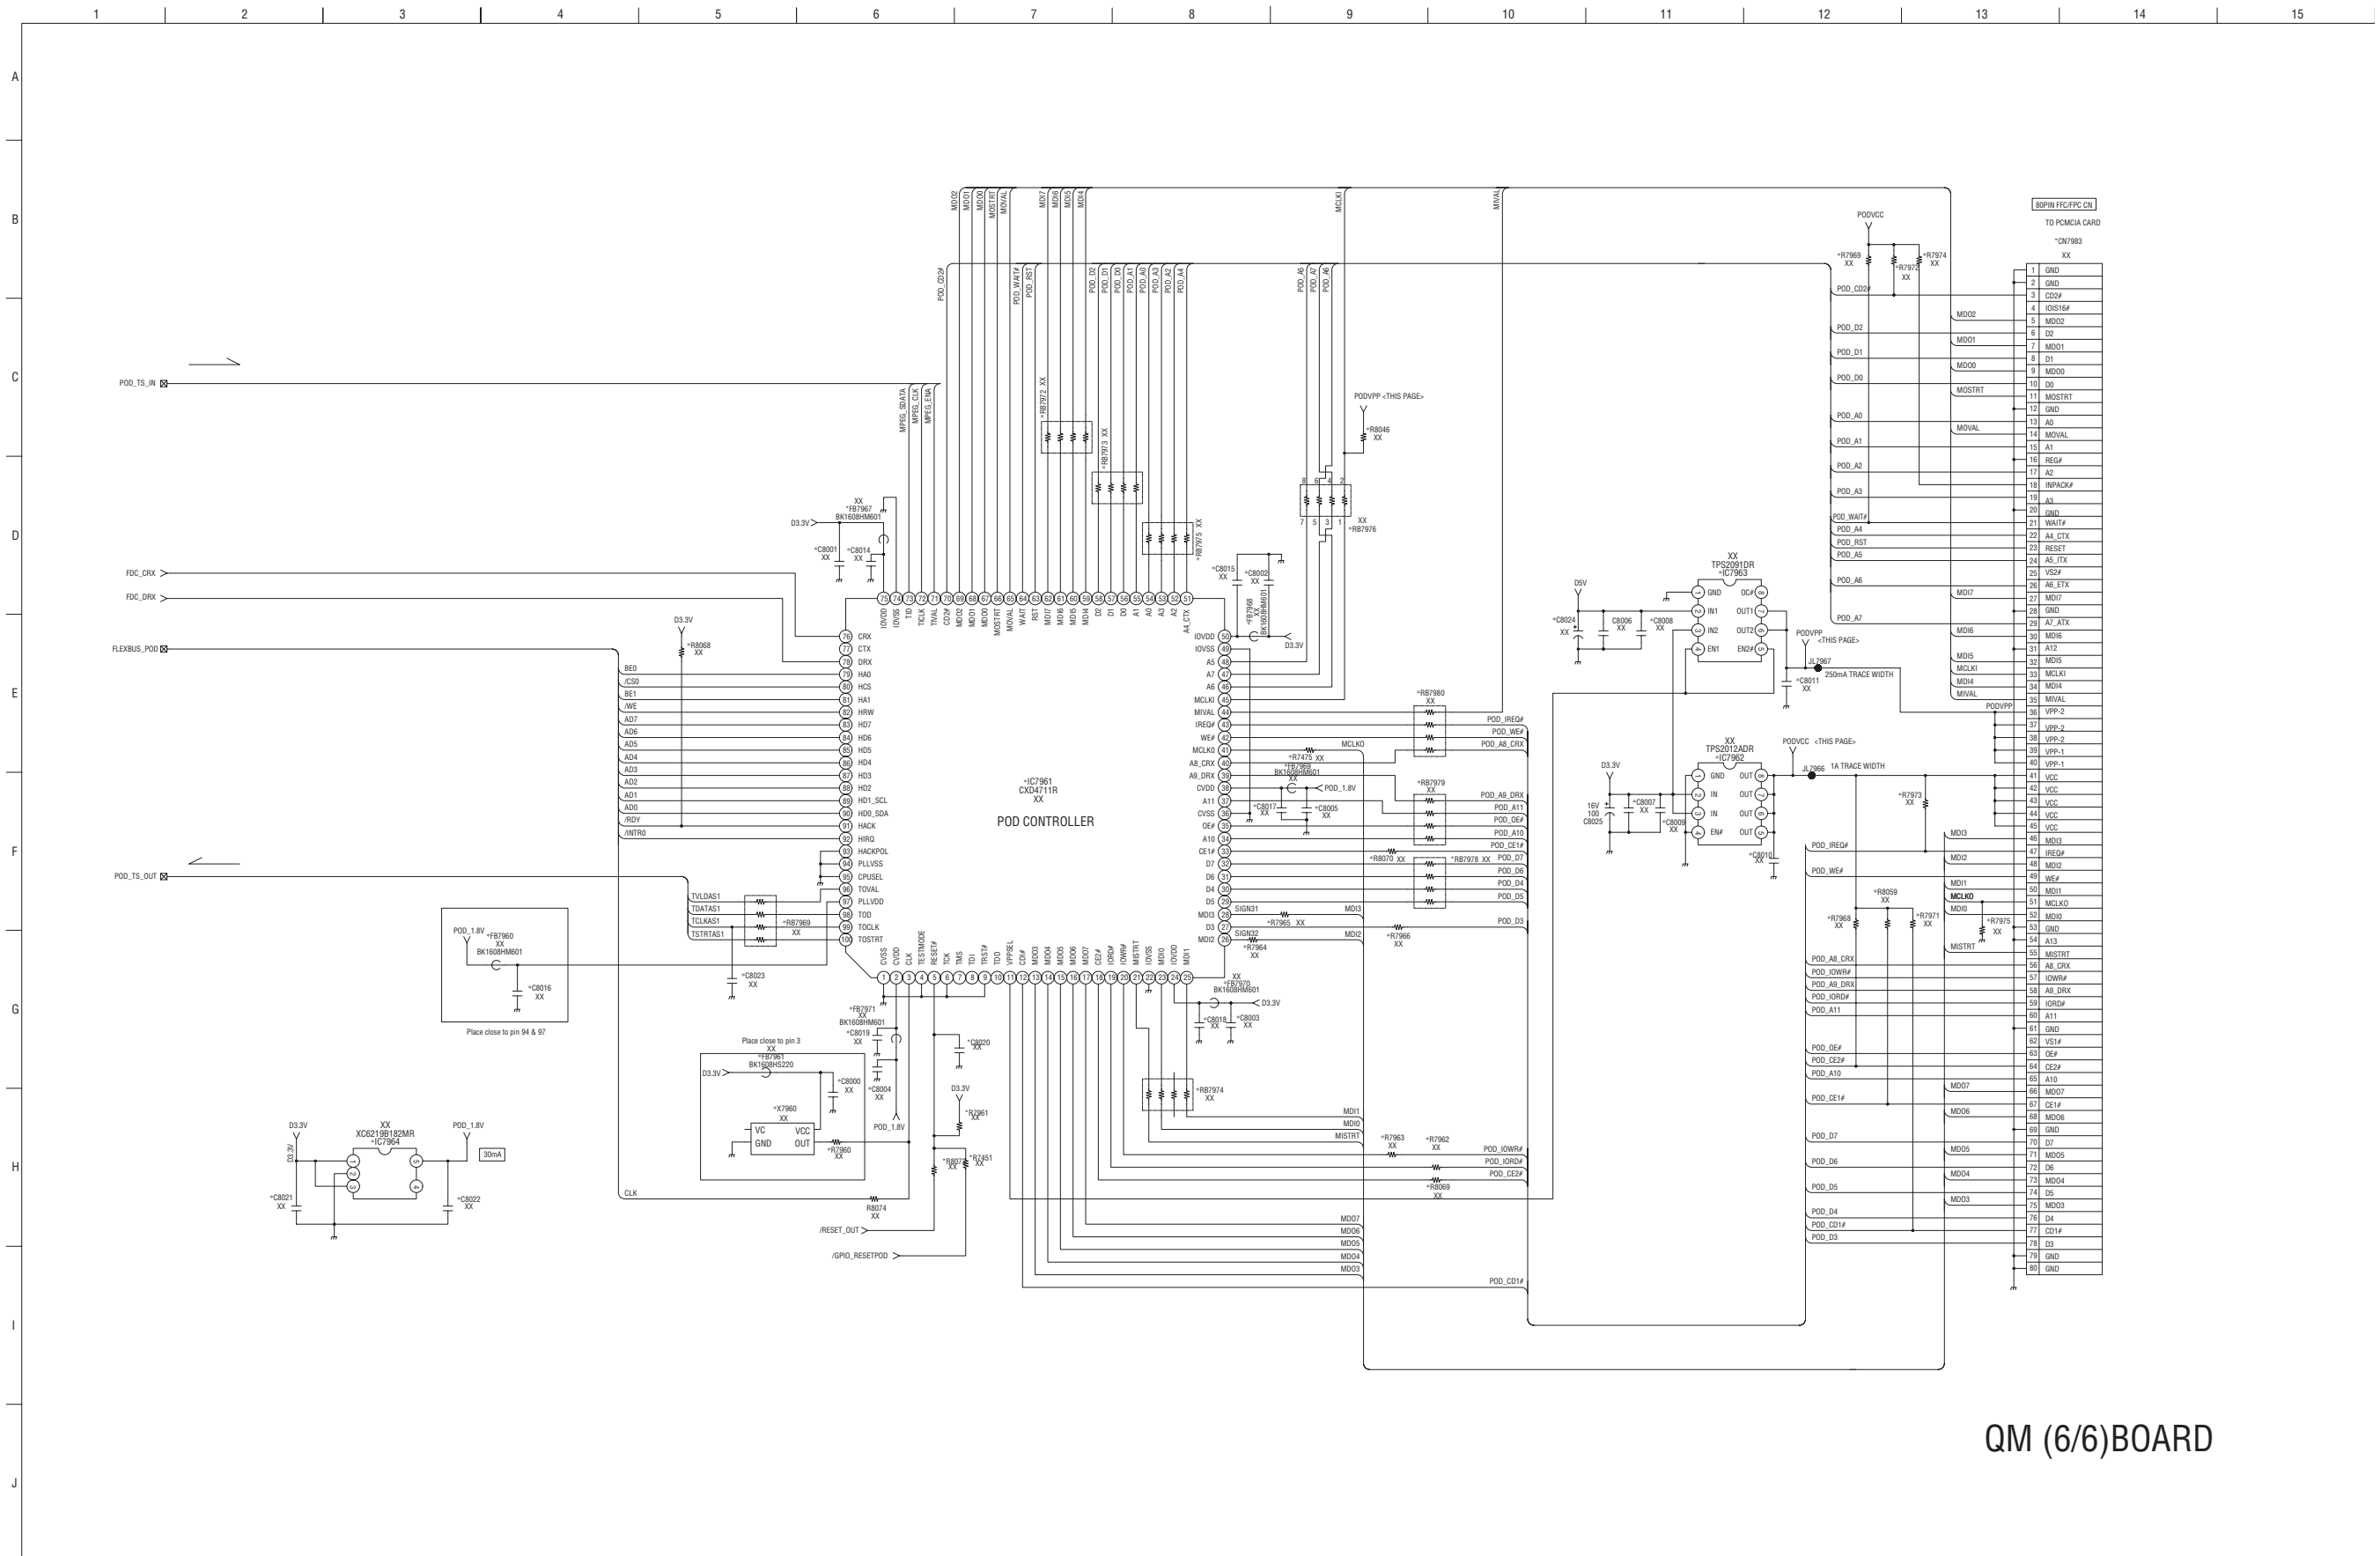


QM (6/6)BOARD


(40) Schematic Diagram of QT Board

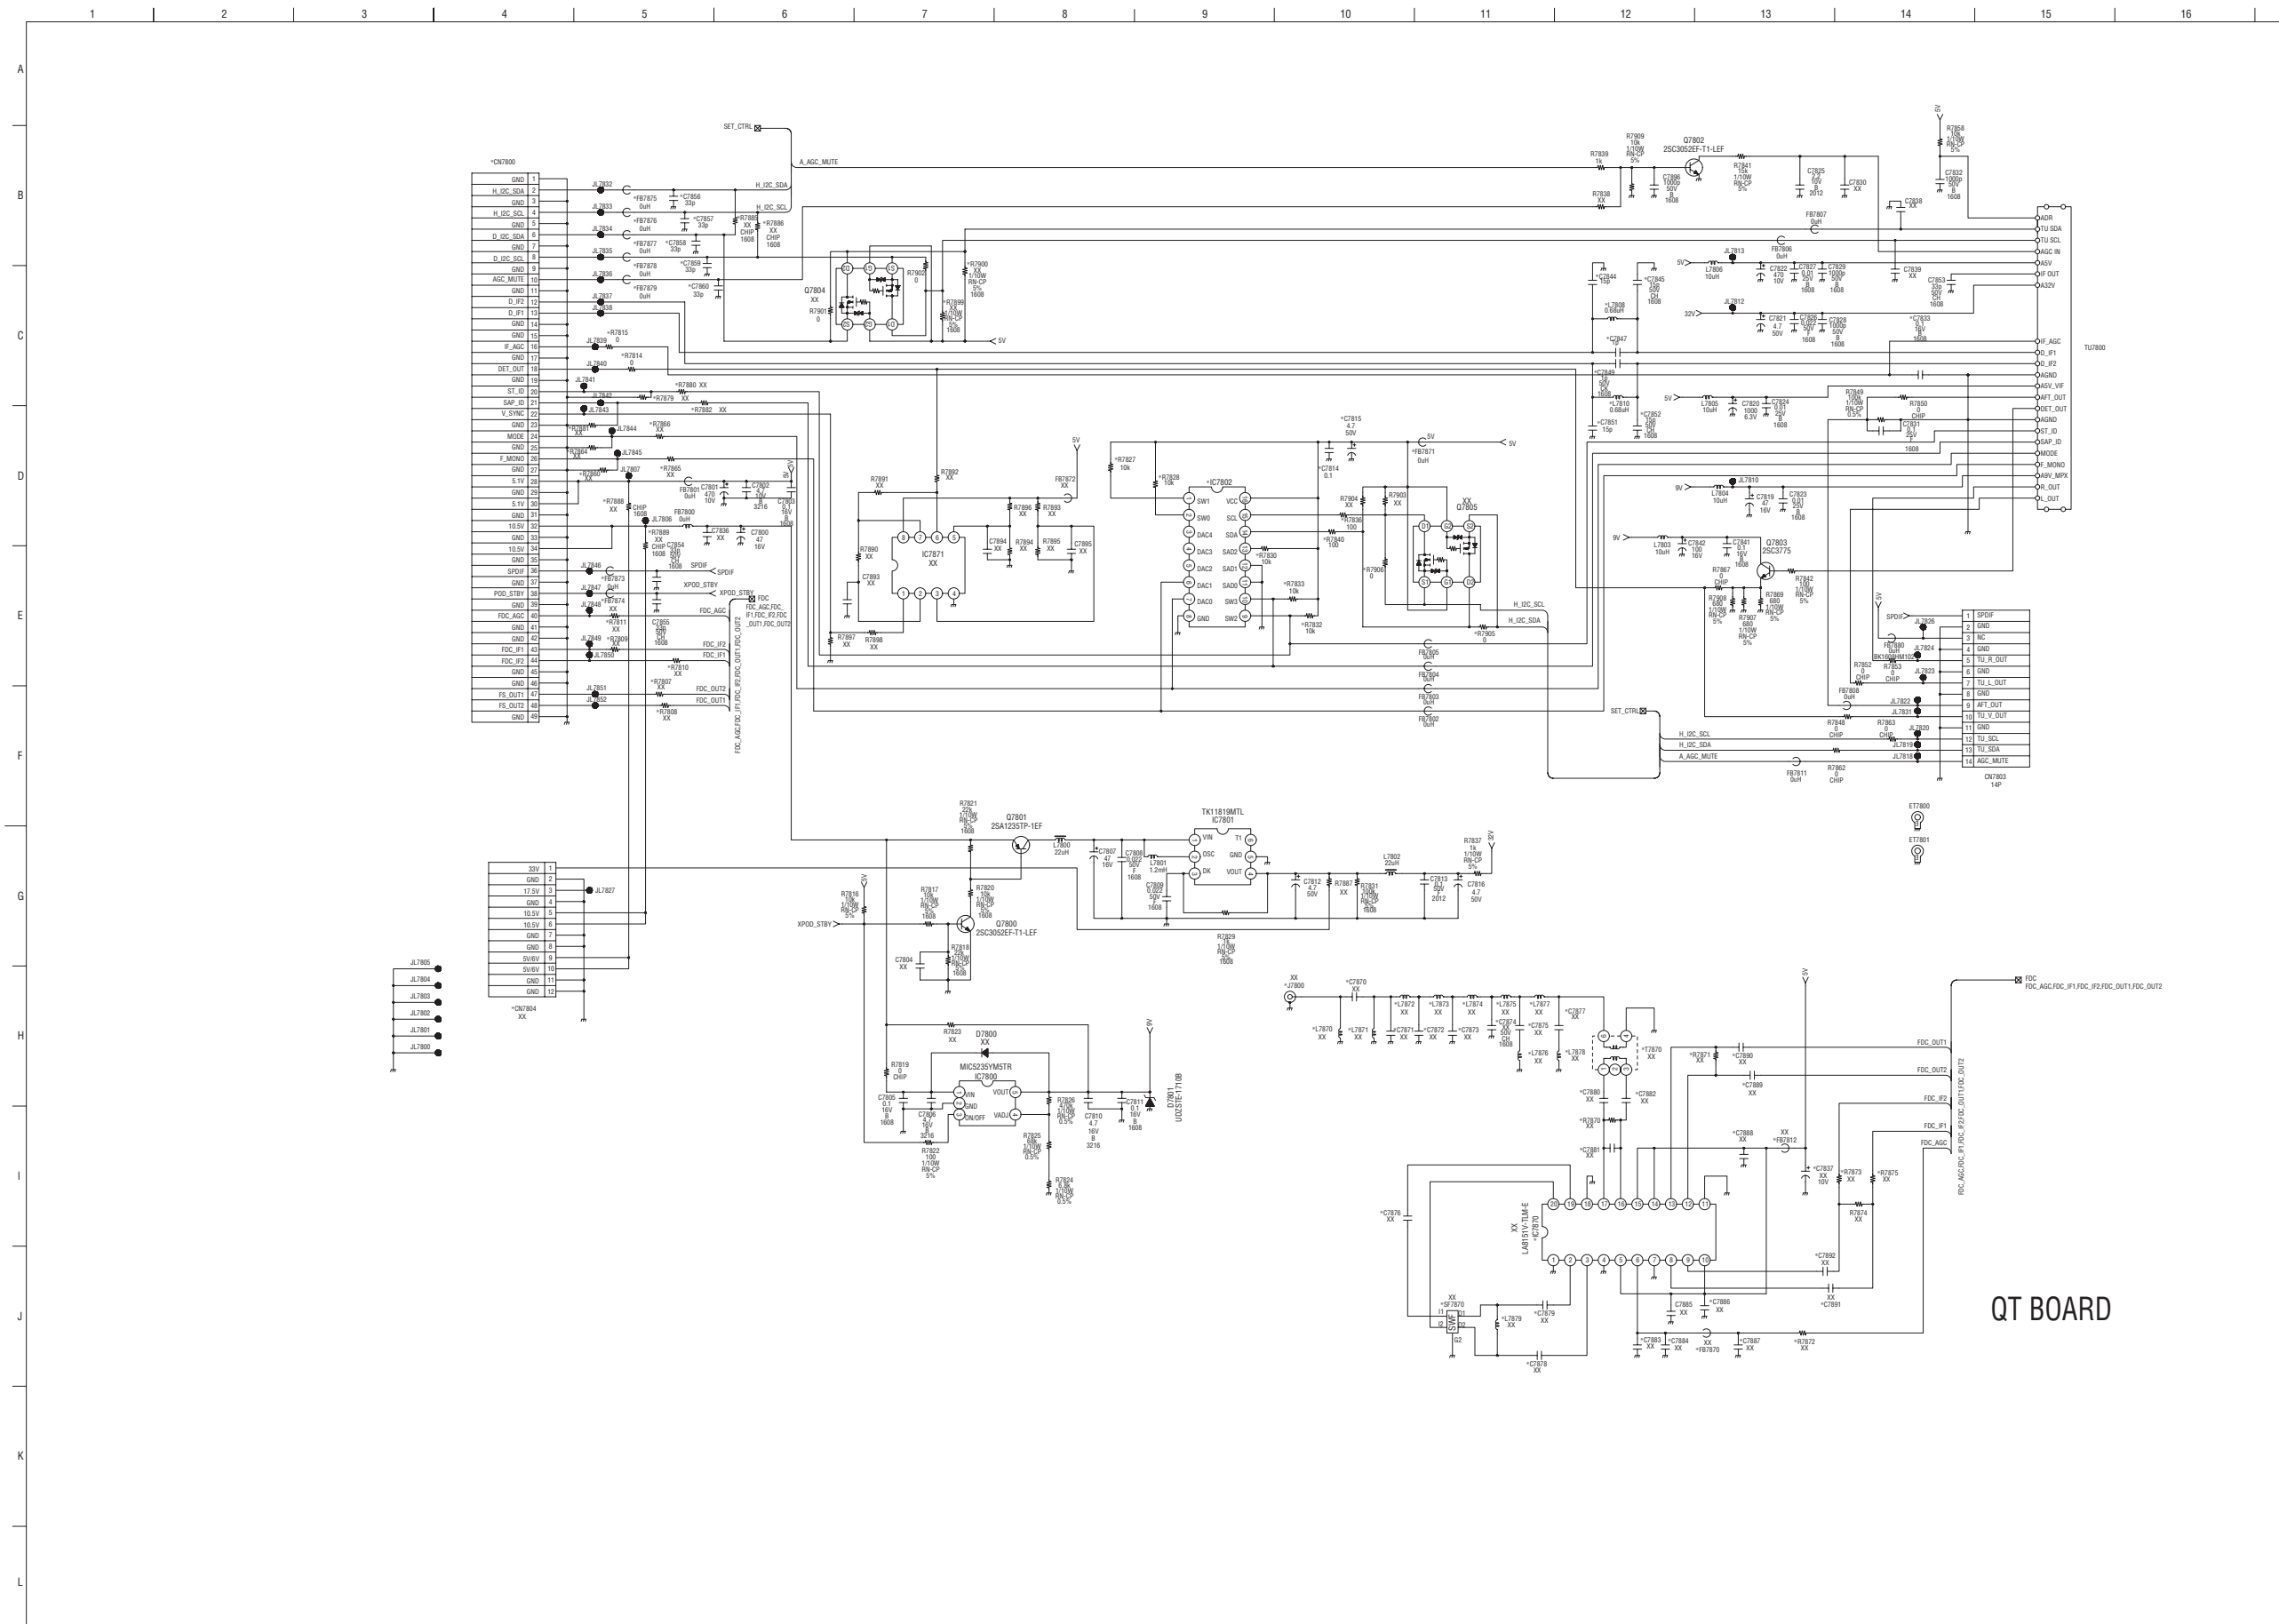

(41) Schematic Diagram of S1, S2 Board

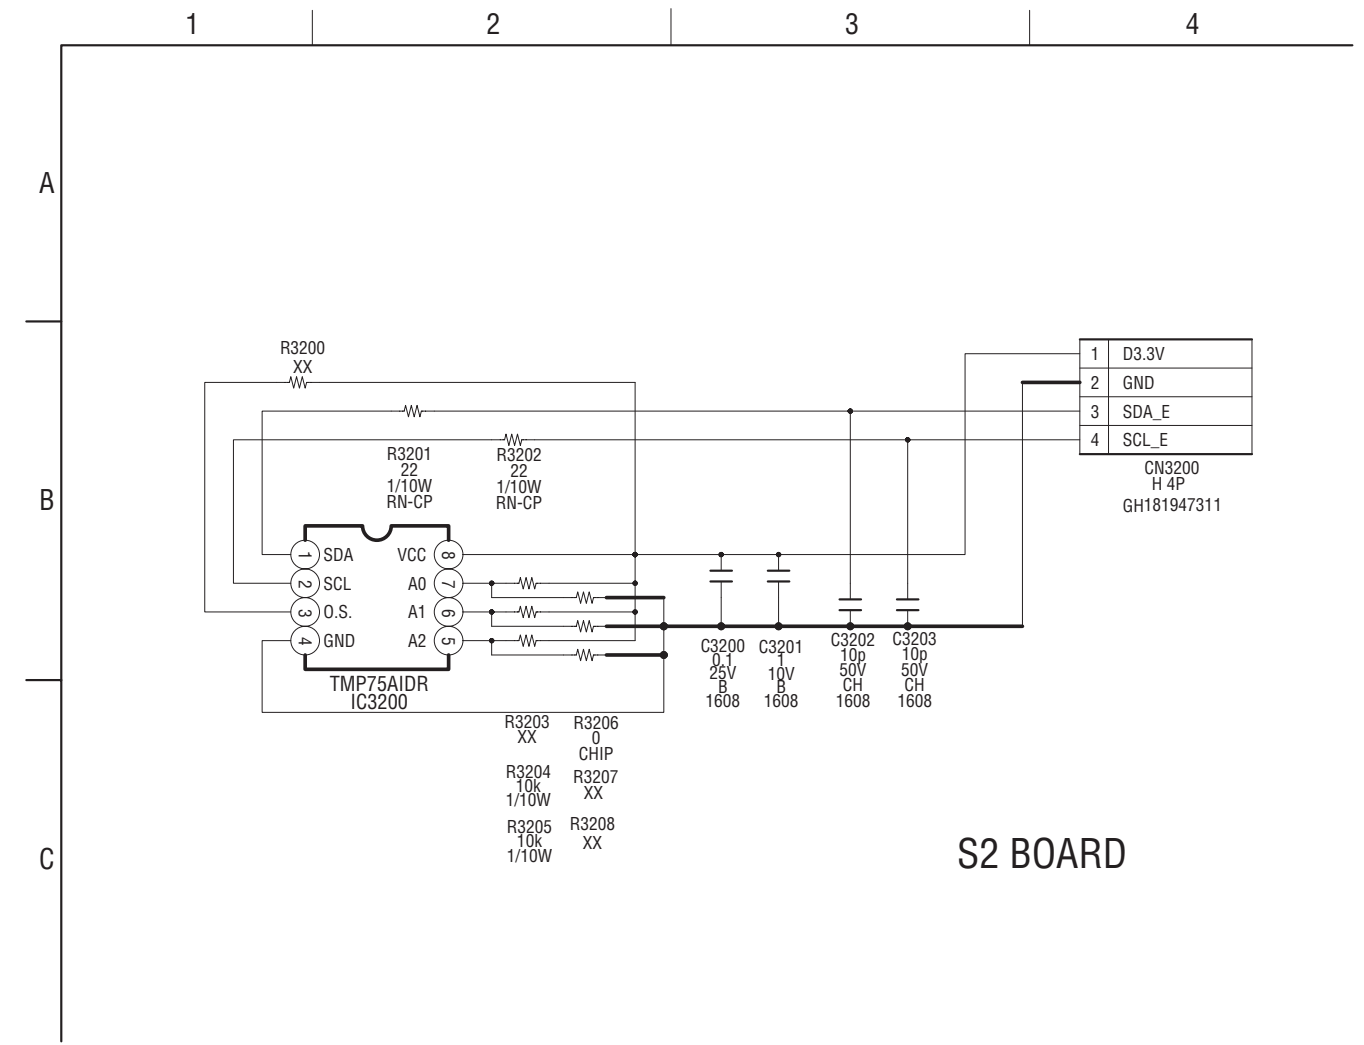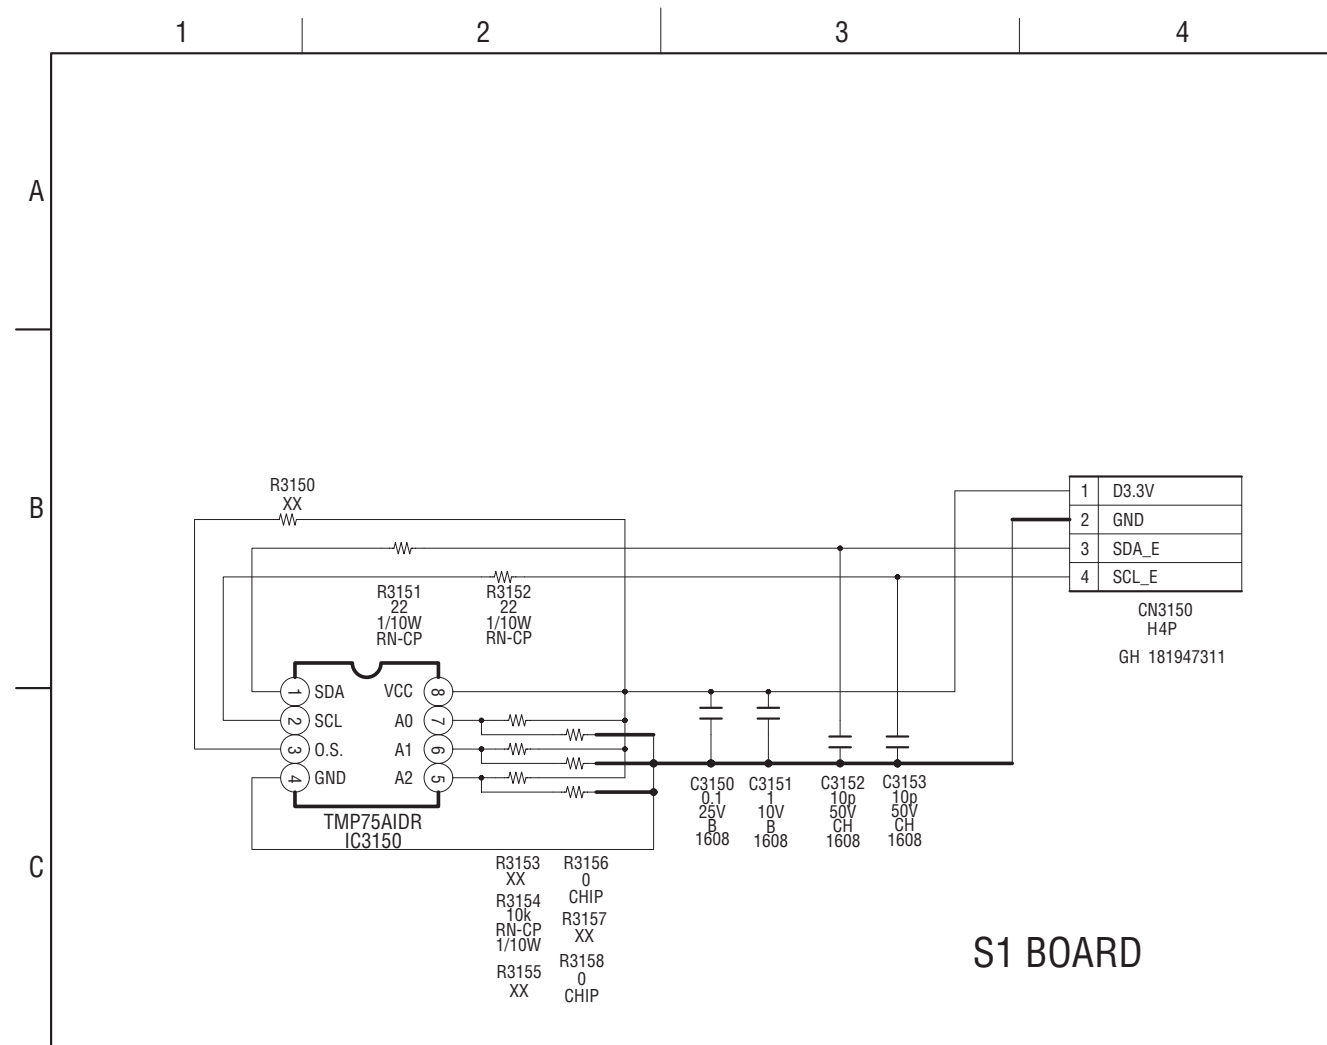

(42) Schematic Diagram of T Board

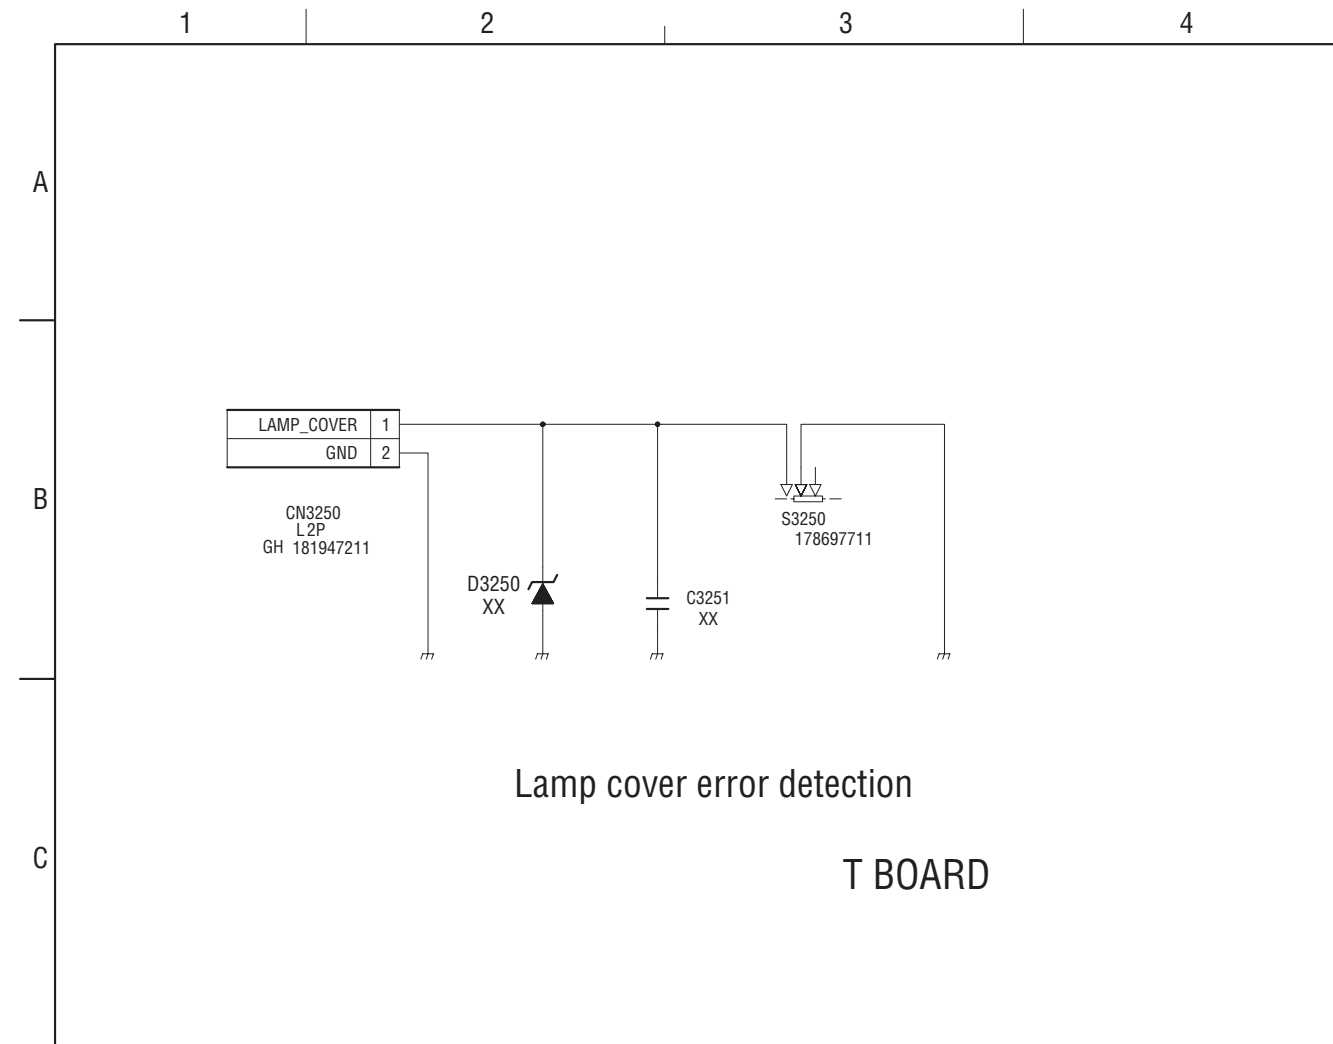




4-5. PRINTED WIRING BOARDS


(1) A1 Board (Side A)

Text Search

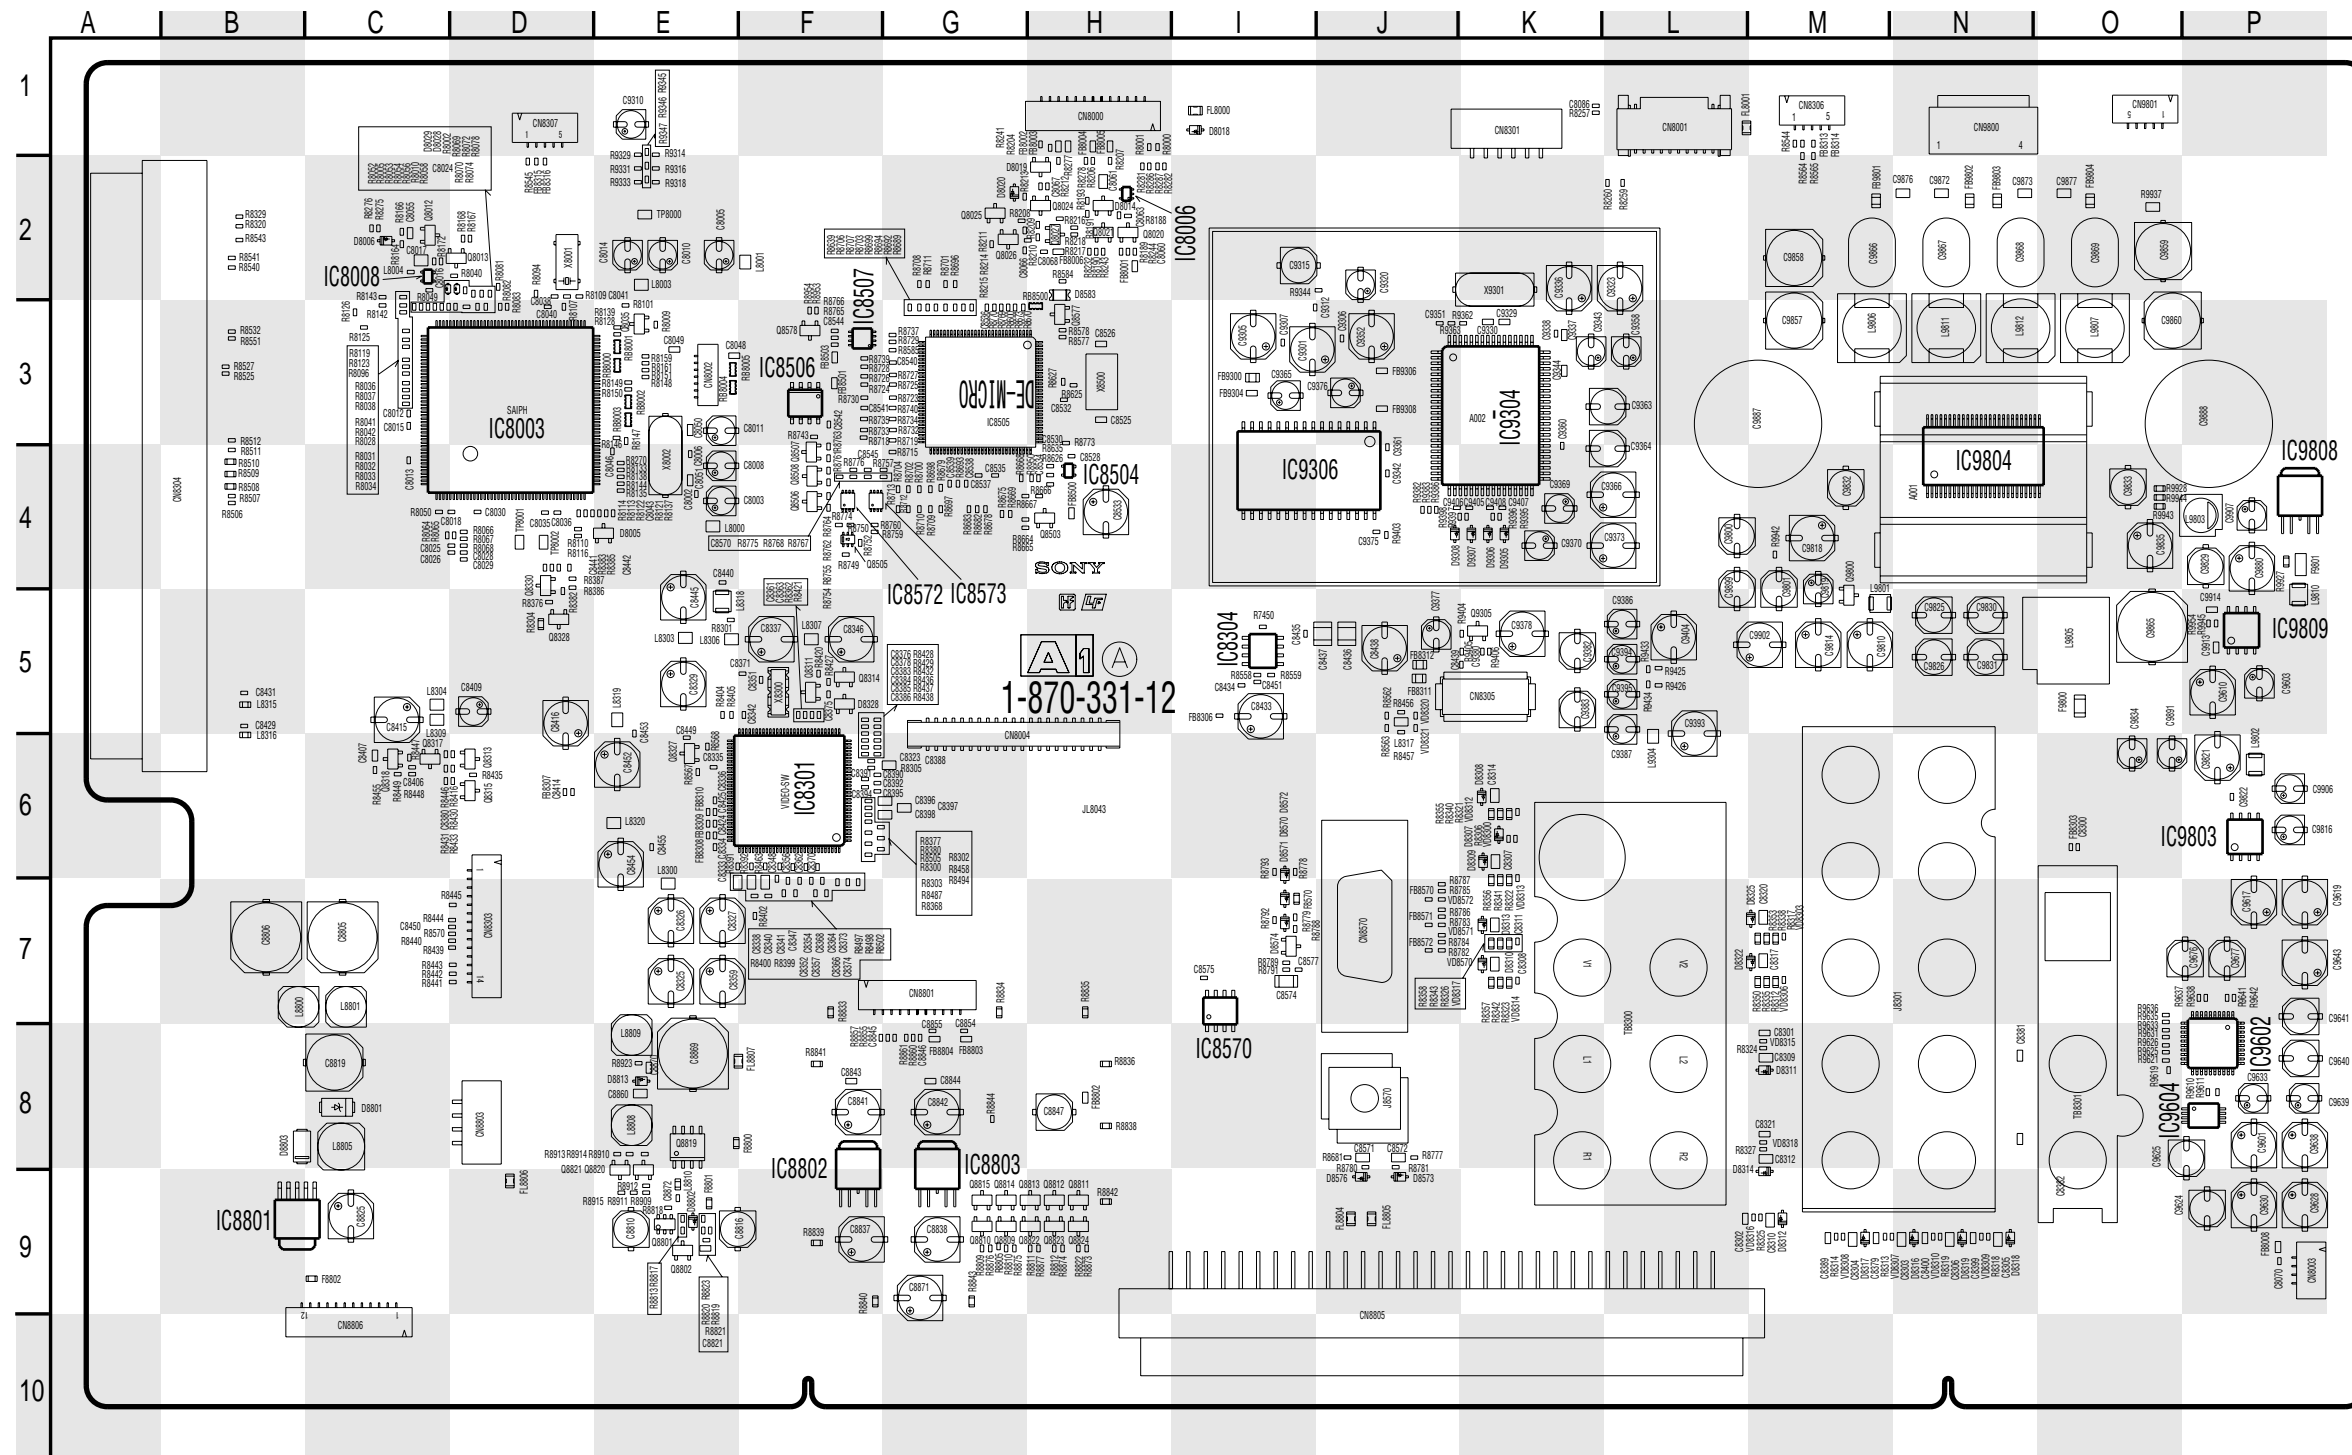


(2) A1 Board (Side B)

Text Search

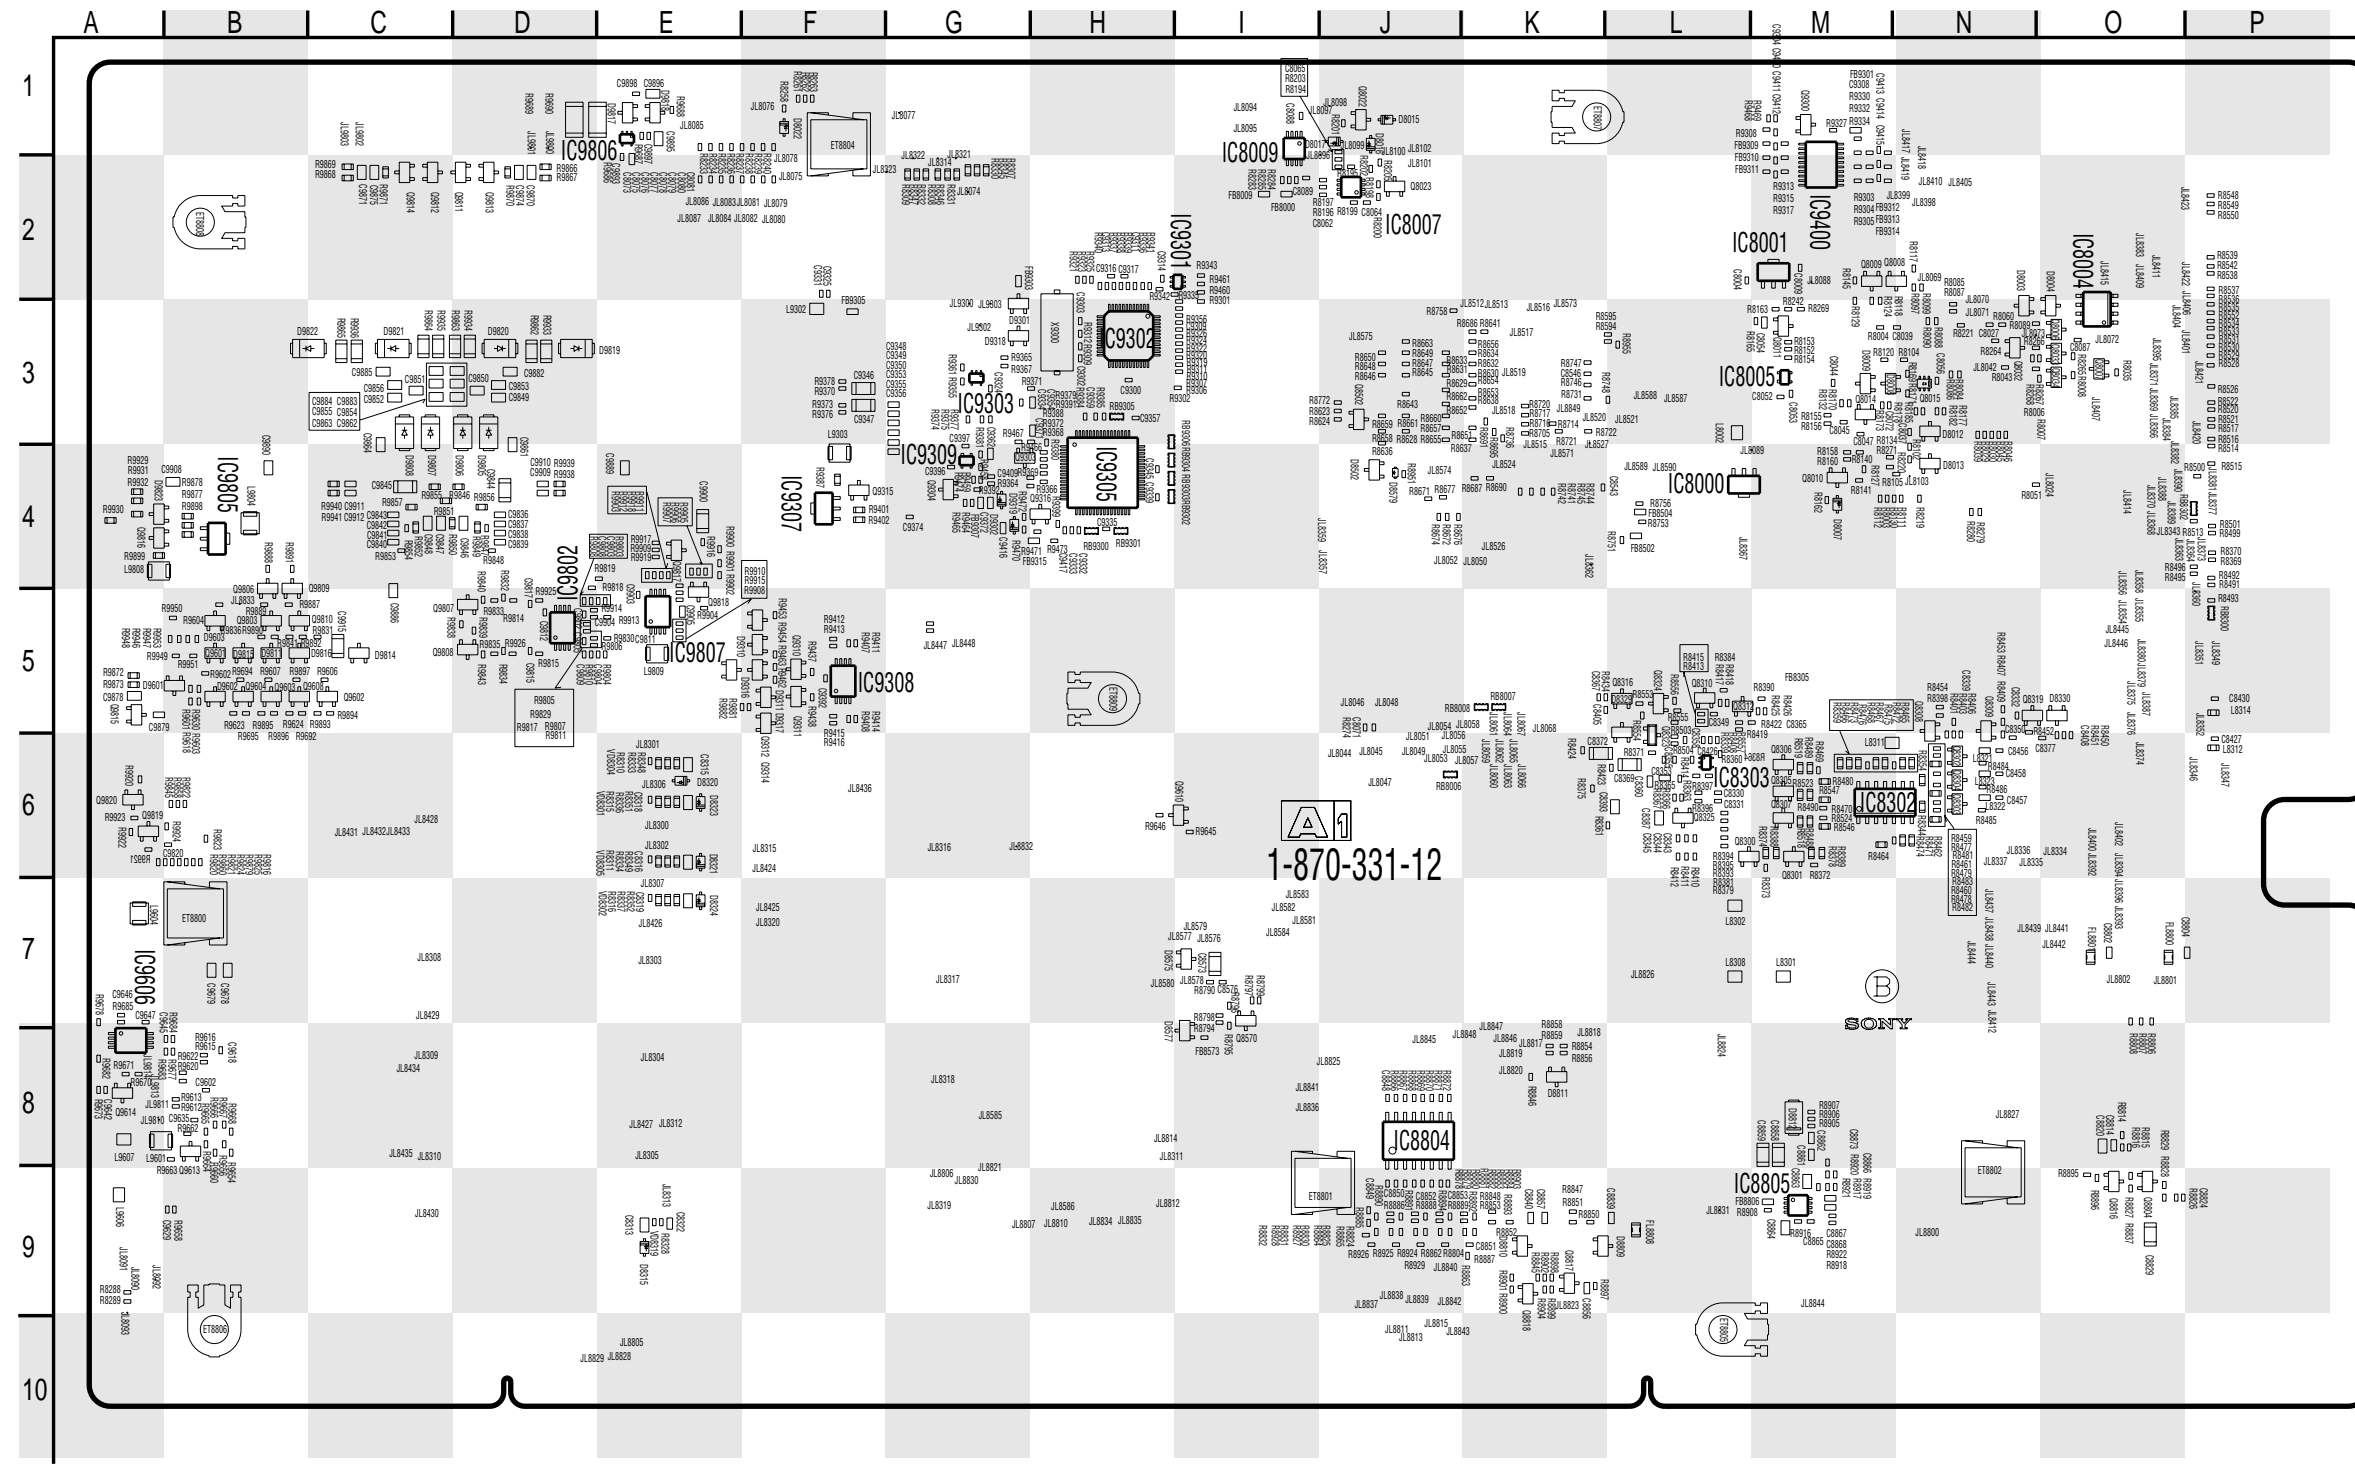

(3) B1 Board (Side A)


Text Search

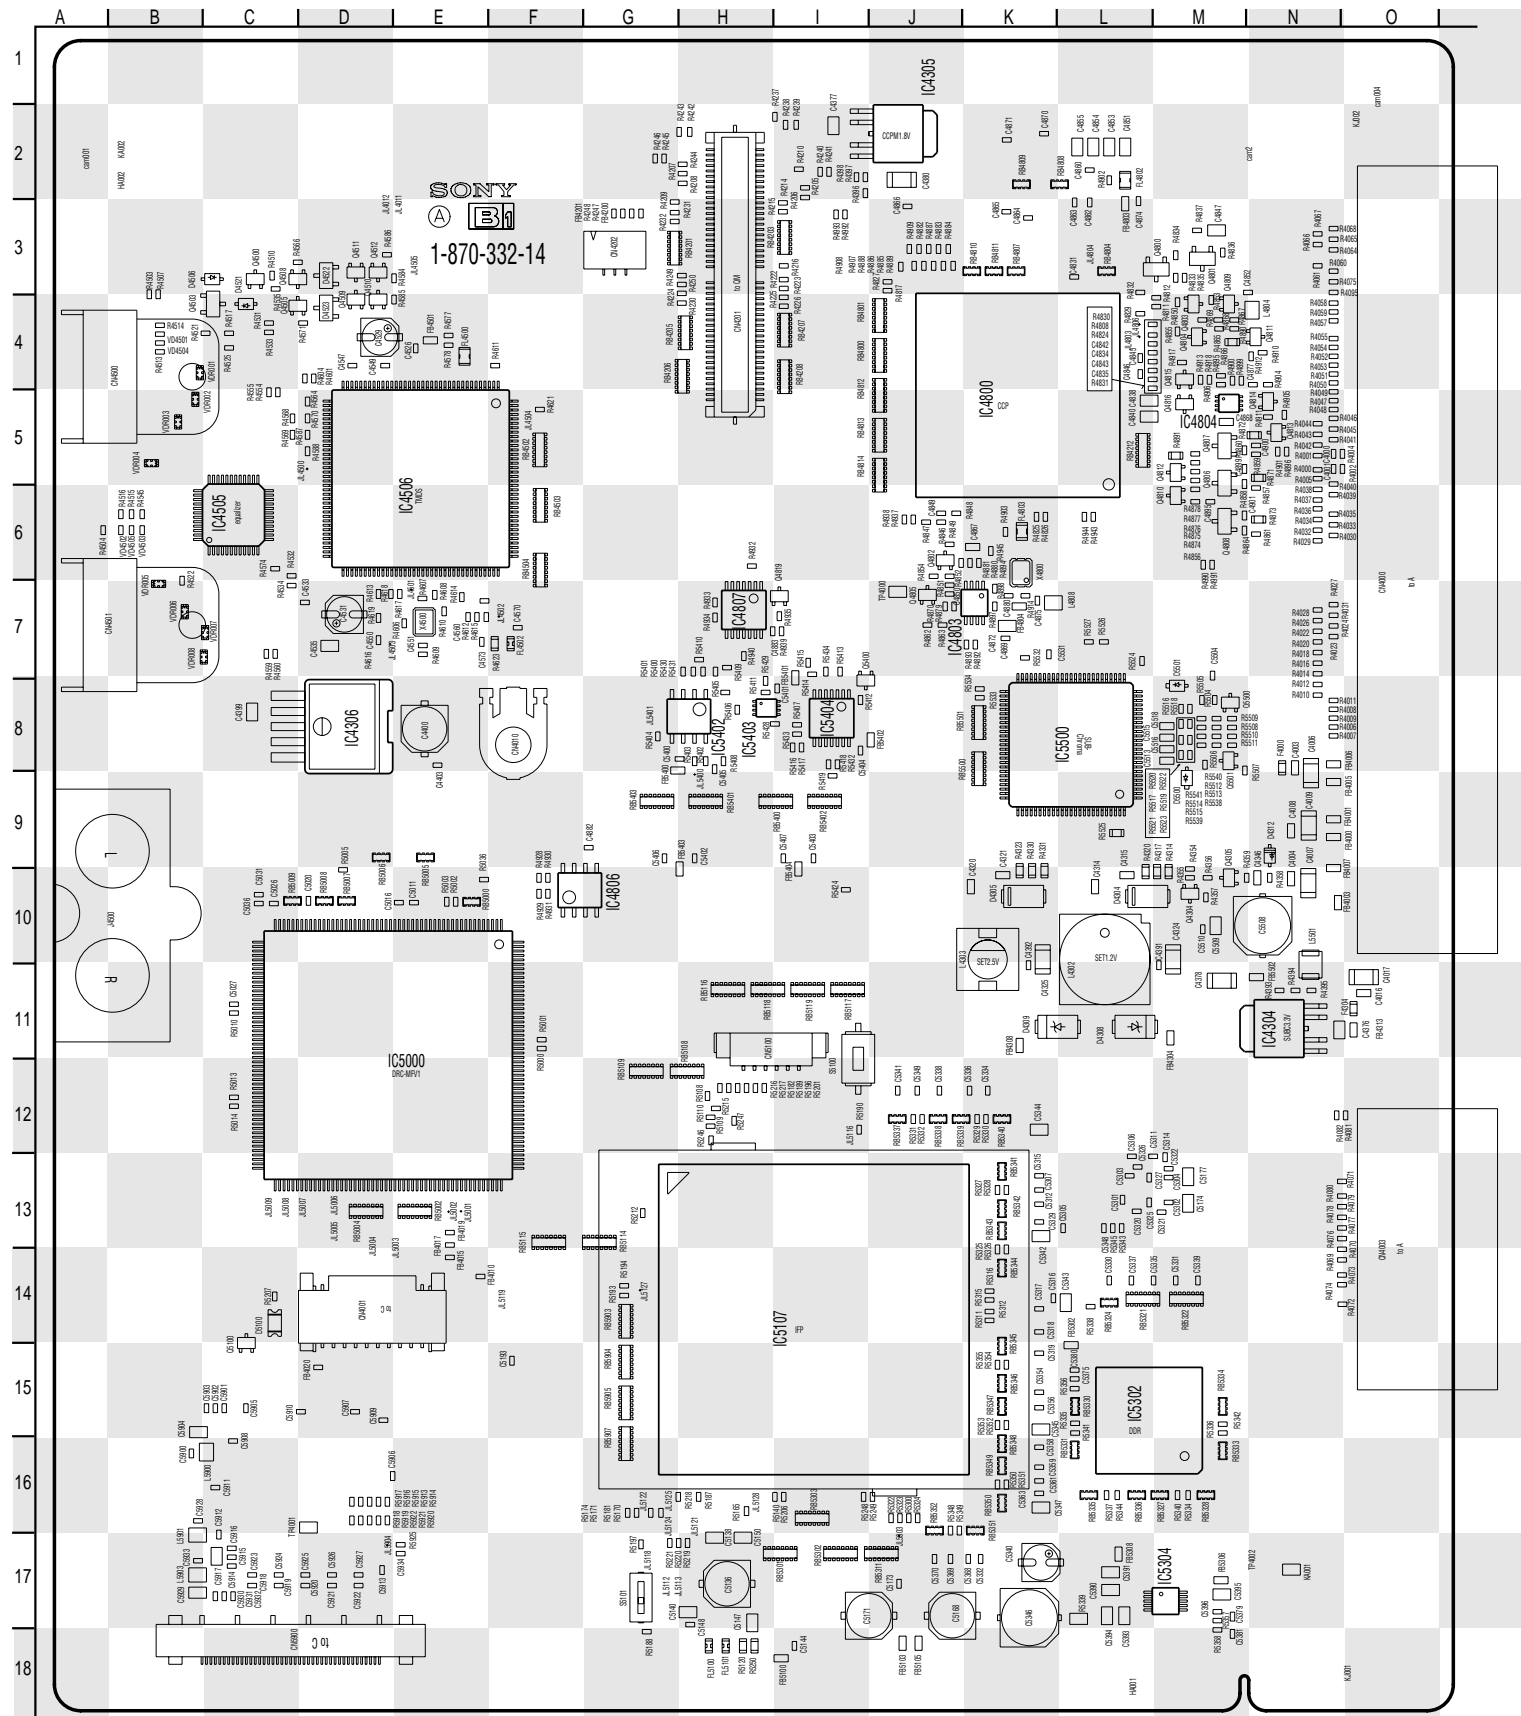




(5) C Board (Side A)

Text Search

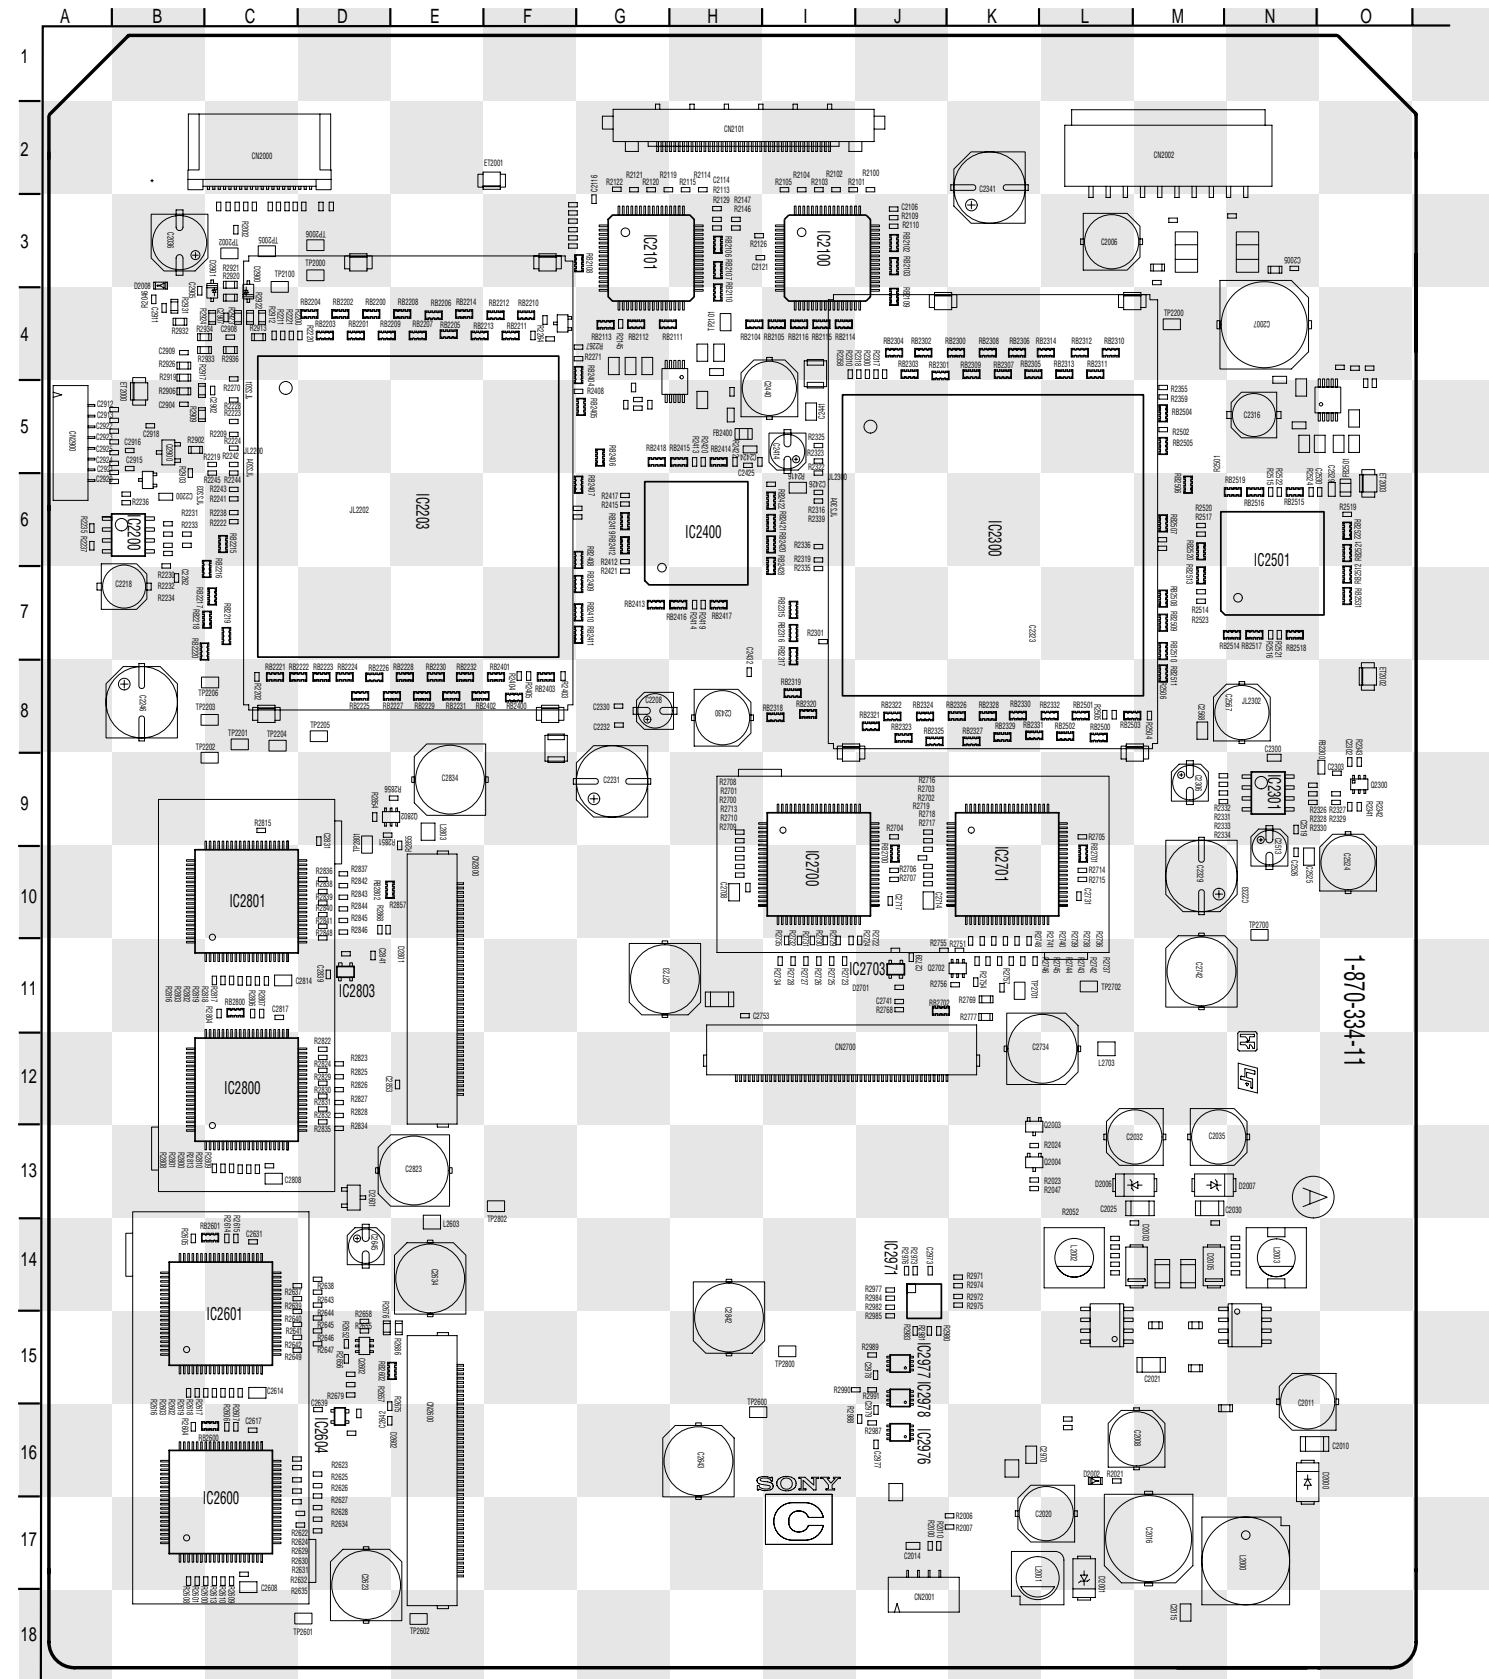


(6) C Board (Side B)

Text Search

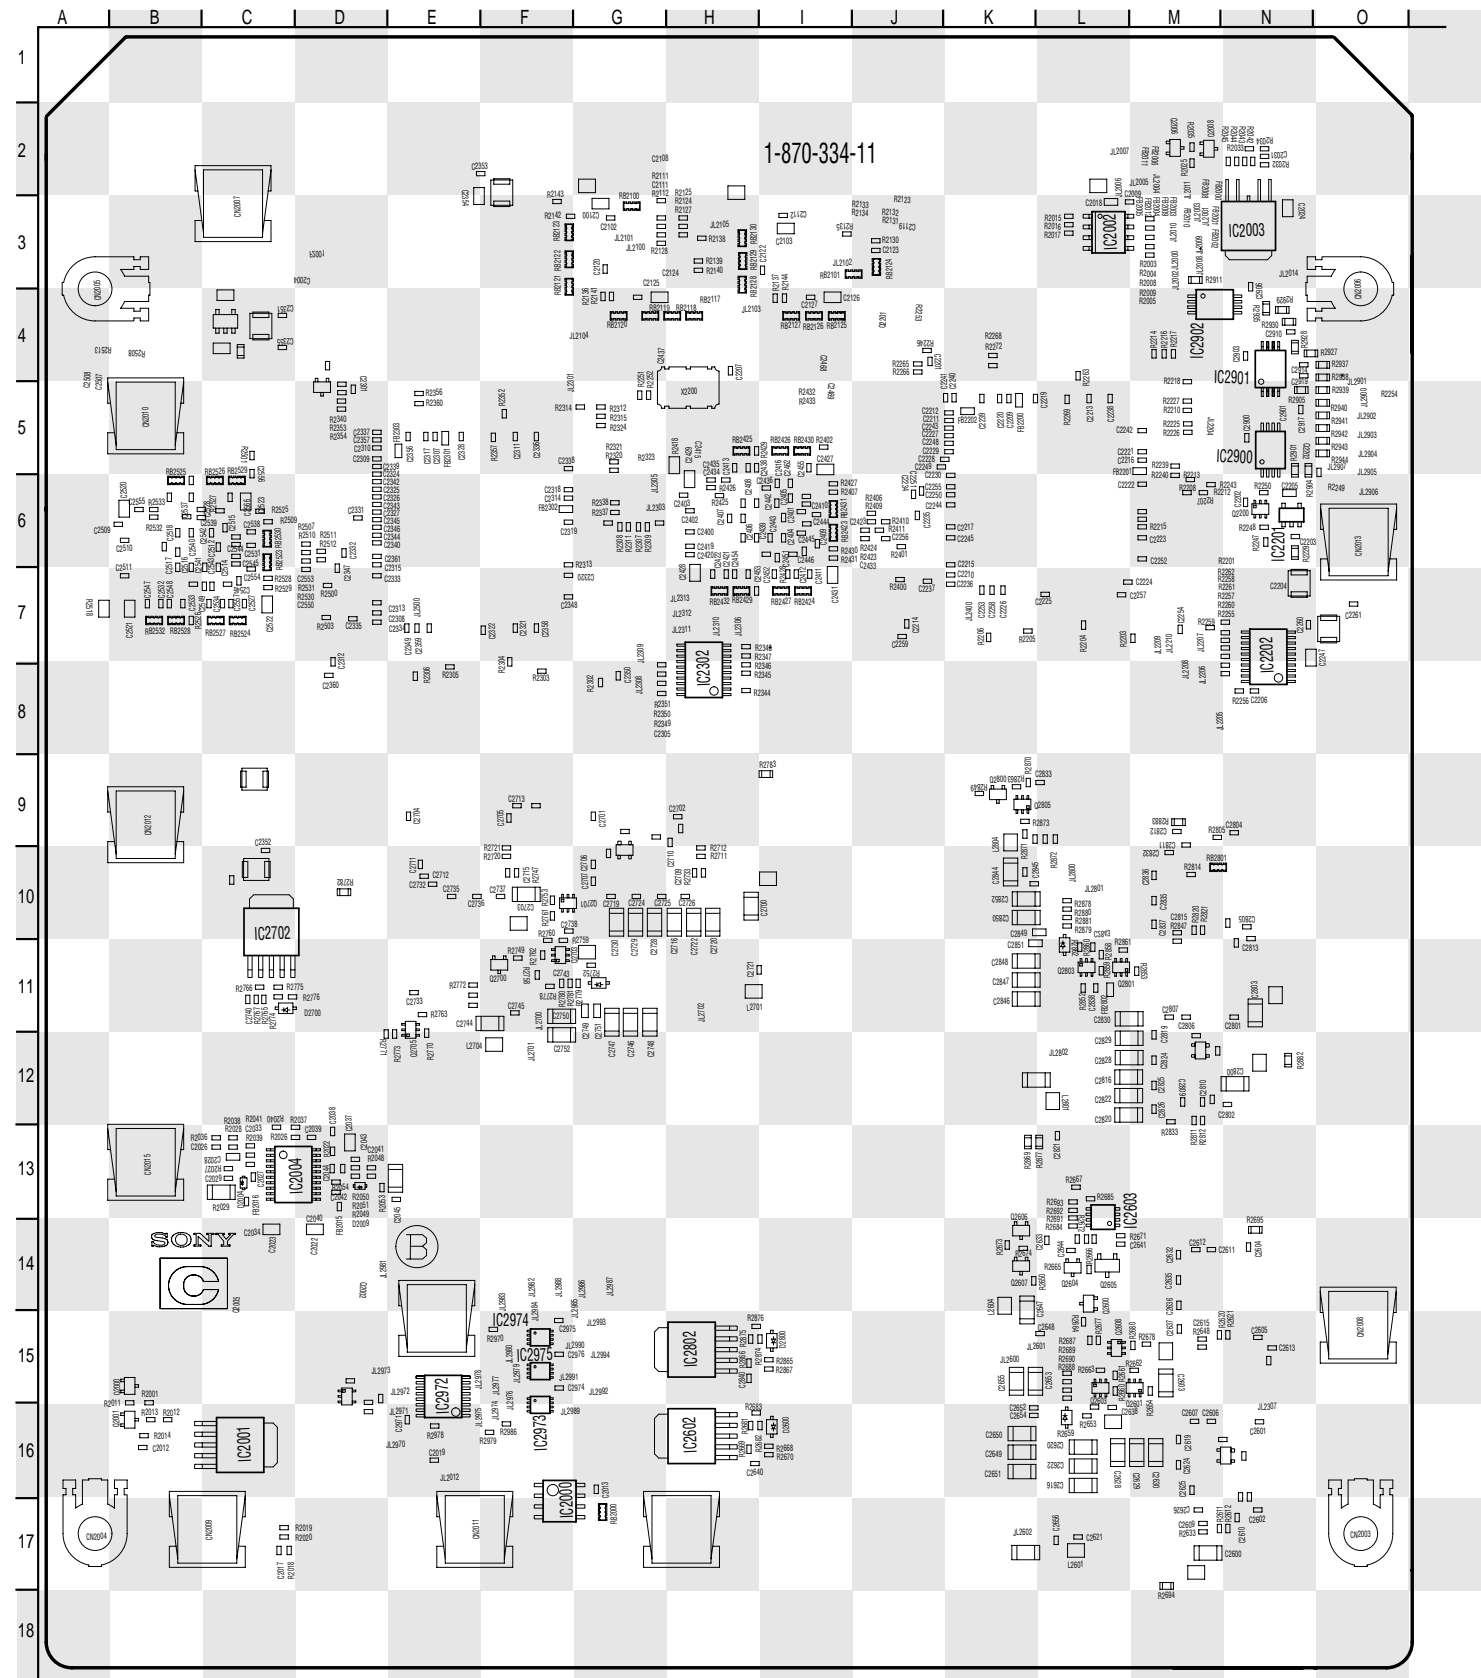

(7) G Board (Side A)

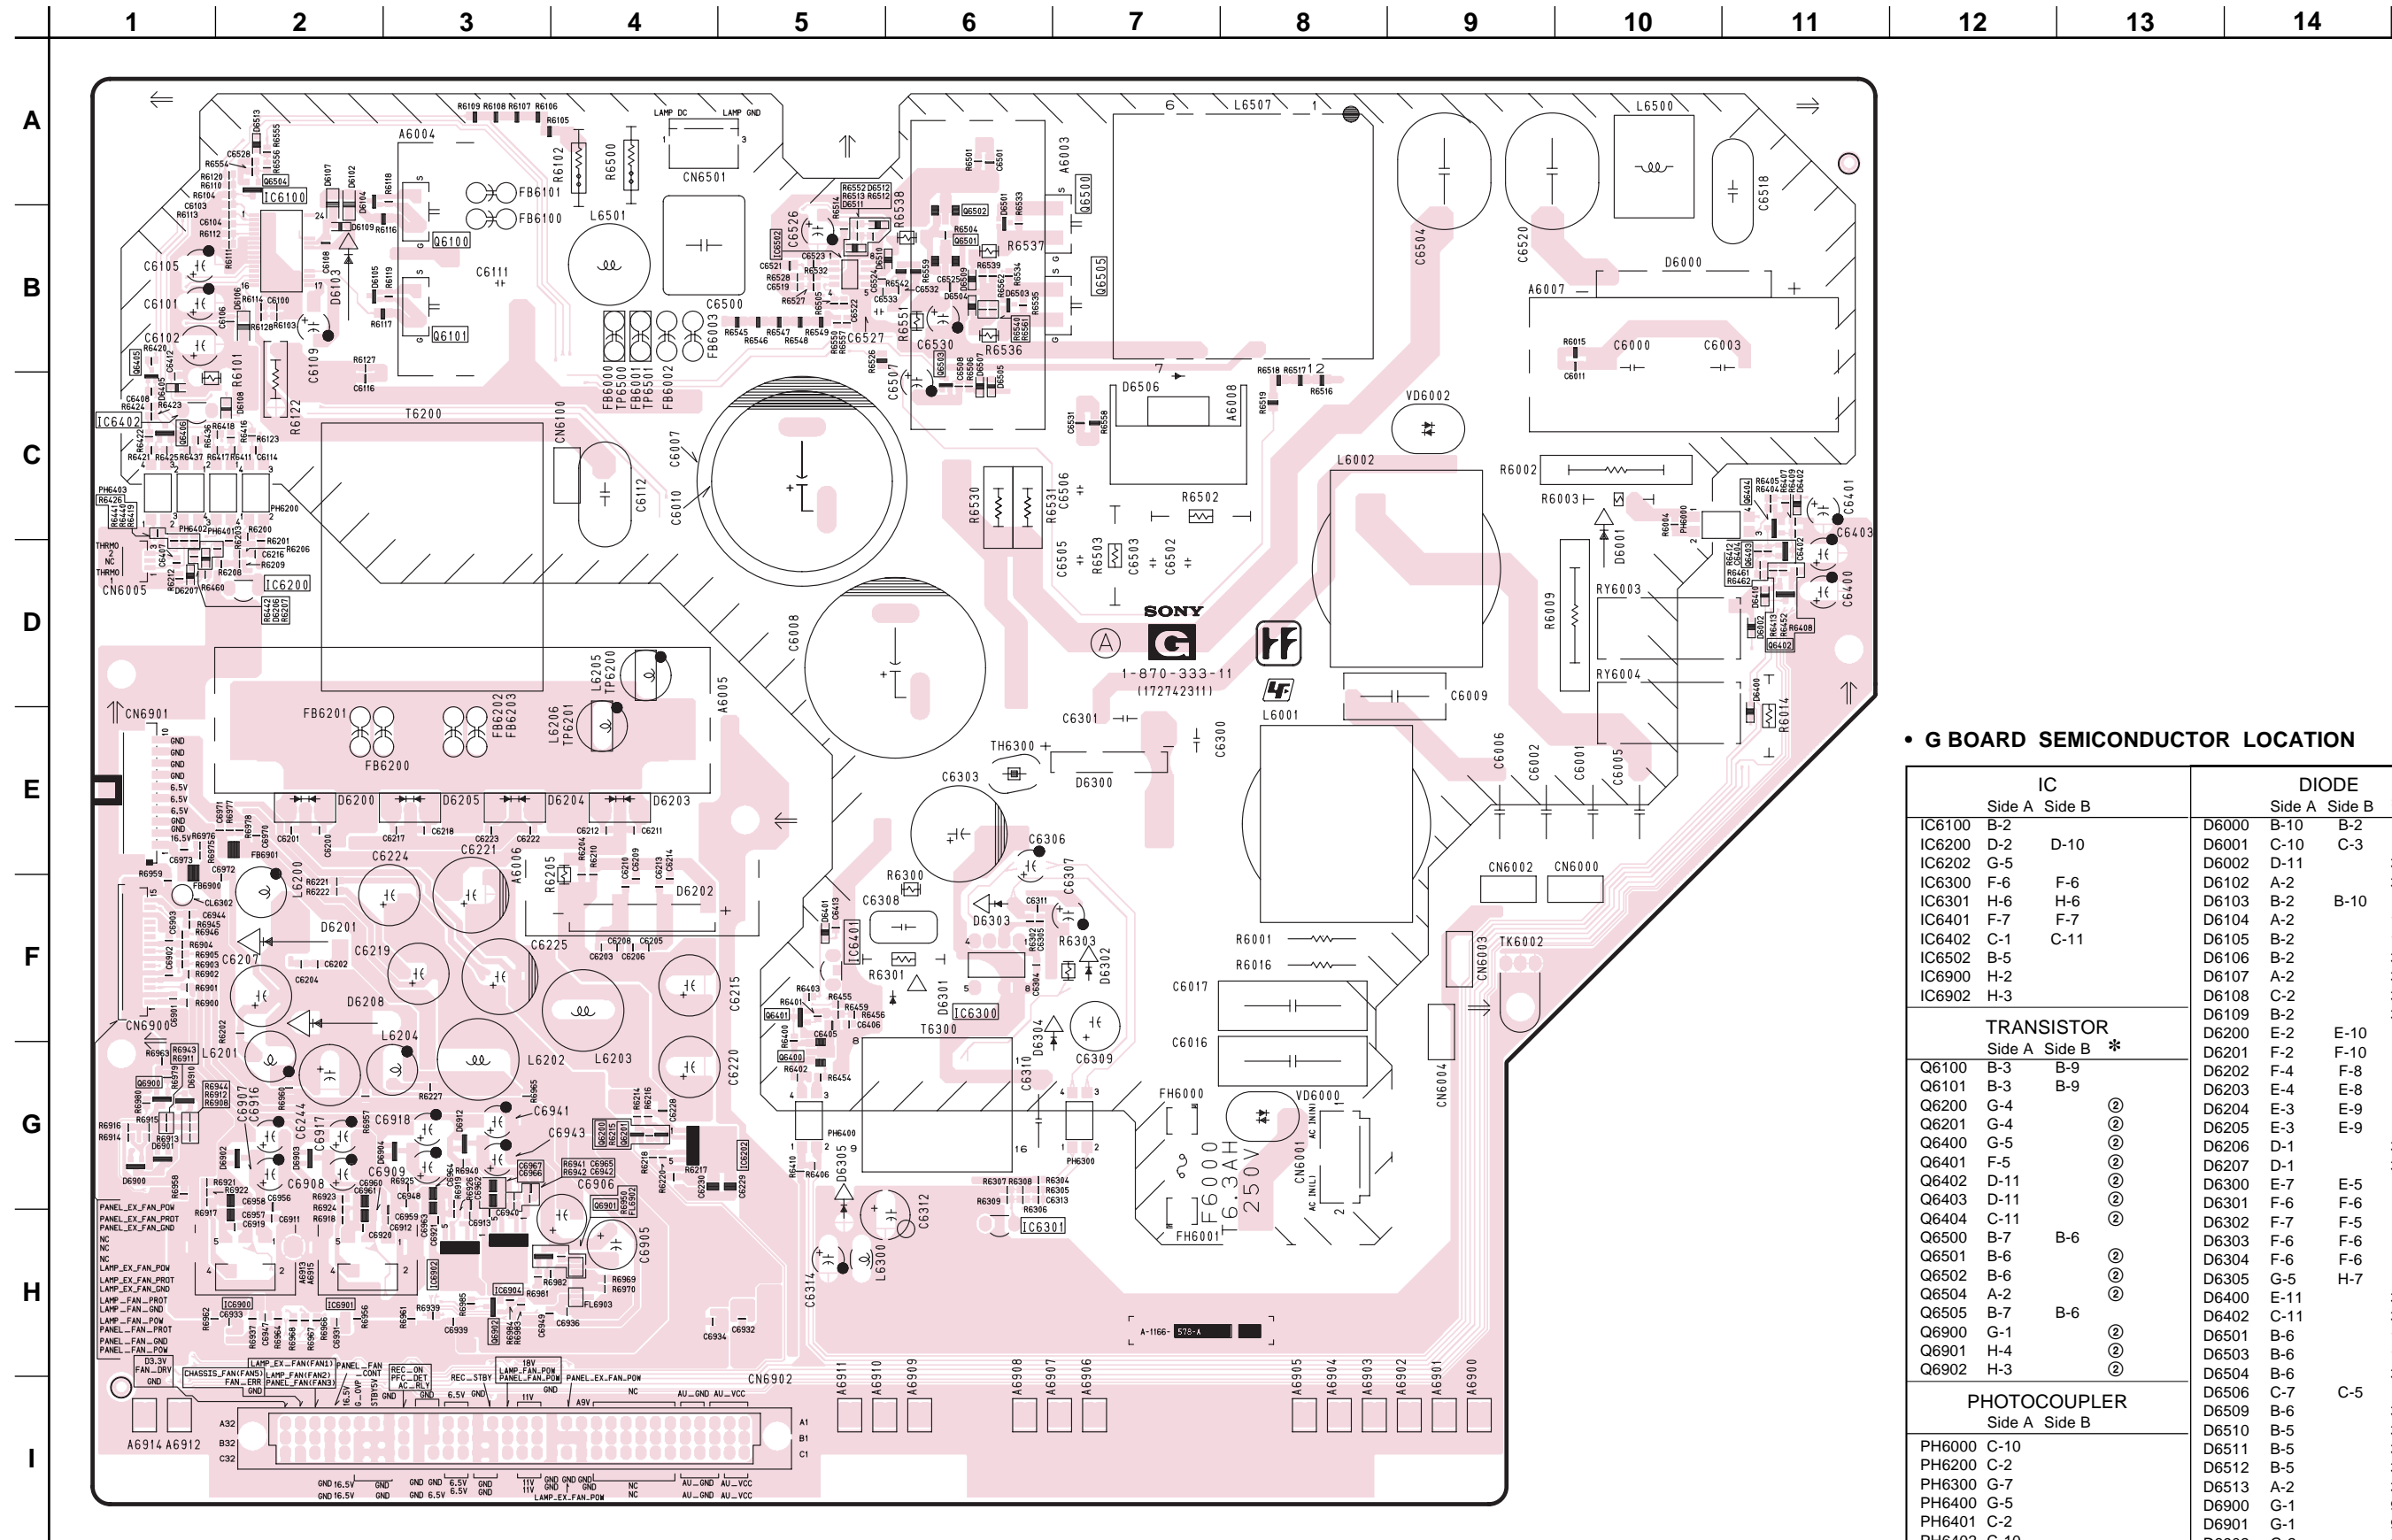


• G BOARD SEMICONDUCTOR LOCATION

IC		DIODE		
Side A	Side B	Side A	Side B	*
IC6100	B-2	D6000	B-10	B-2
IC6200	D-2	D6001	C-10	C-3
IC6202	G-5	D6002	D-11	3
IC6300	F-6	D6102	A-2	3
IC6301	H-6	D6103	B-2	B-10
IC6401	F-7	D6104	A-2	10
IC6402	C-1	D6105	B-2	10
IC6502	B-5	D6106	B-2	3
IC6900	H-2	D6107	A-2	3
IC6902	H-3	D6108	C-2	3
		D6109	B-2	3
		D6200	E-2	E-10
		D6201	F-2	F-10
		D6202	F-4	F-8
		D6203	E-4	E-8
		D6204	E-3	E-9
		D6205	E-3	E-9
		D6206	D-1	3
		D6207	D-1	3
		D6300	E-7	E-5
		D6301	F-6	F-6
		D6302	F-7	F-5
		D6303	F-6	F-6
		D6304	F-6	F-6
		D6305	G-5	H-7
		D6400	E-11	3
		D6402	C-11	3
		D6501	B-6	10
		D6503	B-6	10
		D6504	B-6	3
		D6506	C-7	C-5
		D6509	B-6	3
		D6510	B-5	3
		D6511	B-5	3
		D6512	B-5	3
		D6513	A-2	3
		D6900	G-1	9
		D6901	G-1	9
		D6902	G-2	9
		D6904	G-3	9
TRANSISTOR				
Side A	Side B			*
Q6100	B-3	B-9		
Q6101	B-3	B-9		
Q6200	G-4		②	
Q6201	G-4		②	
Q6400	G-5		②	
Q6401	F-5		②	
Q6402	D-11		②	
Q6403	D-11		②	
Q6404	C-11		②	
Q6500	B-7	B-6		
Q6501	B-6		②	
Q6502	B-6		②	
Q6504	A-2		②	
Q6505	B-7	B-6		
Q6900	G-1		②	
Q6901	H-4		②	
Q6902	H-3		②	
PHOTOCOUPLER				
Side A	Side B			
PH6000	C-10			
PH6200	C-2			
PH6300	G-7			
PH6400	G-5			
PH6401	C-2			
PH6402	C-10			

\*: Refer to Terminal name of semiconductor in silk screen printed circuit (see page 37)

(8) G Board (Side B)

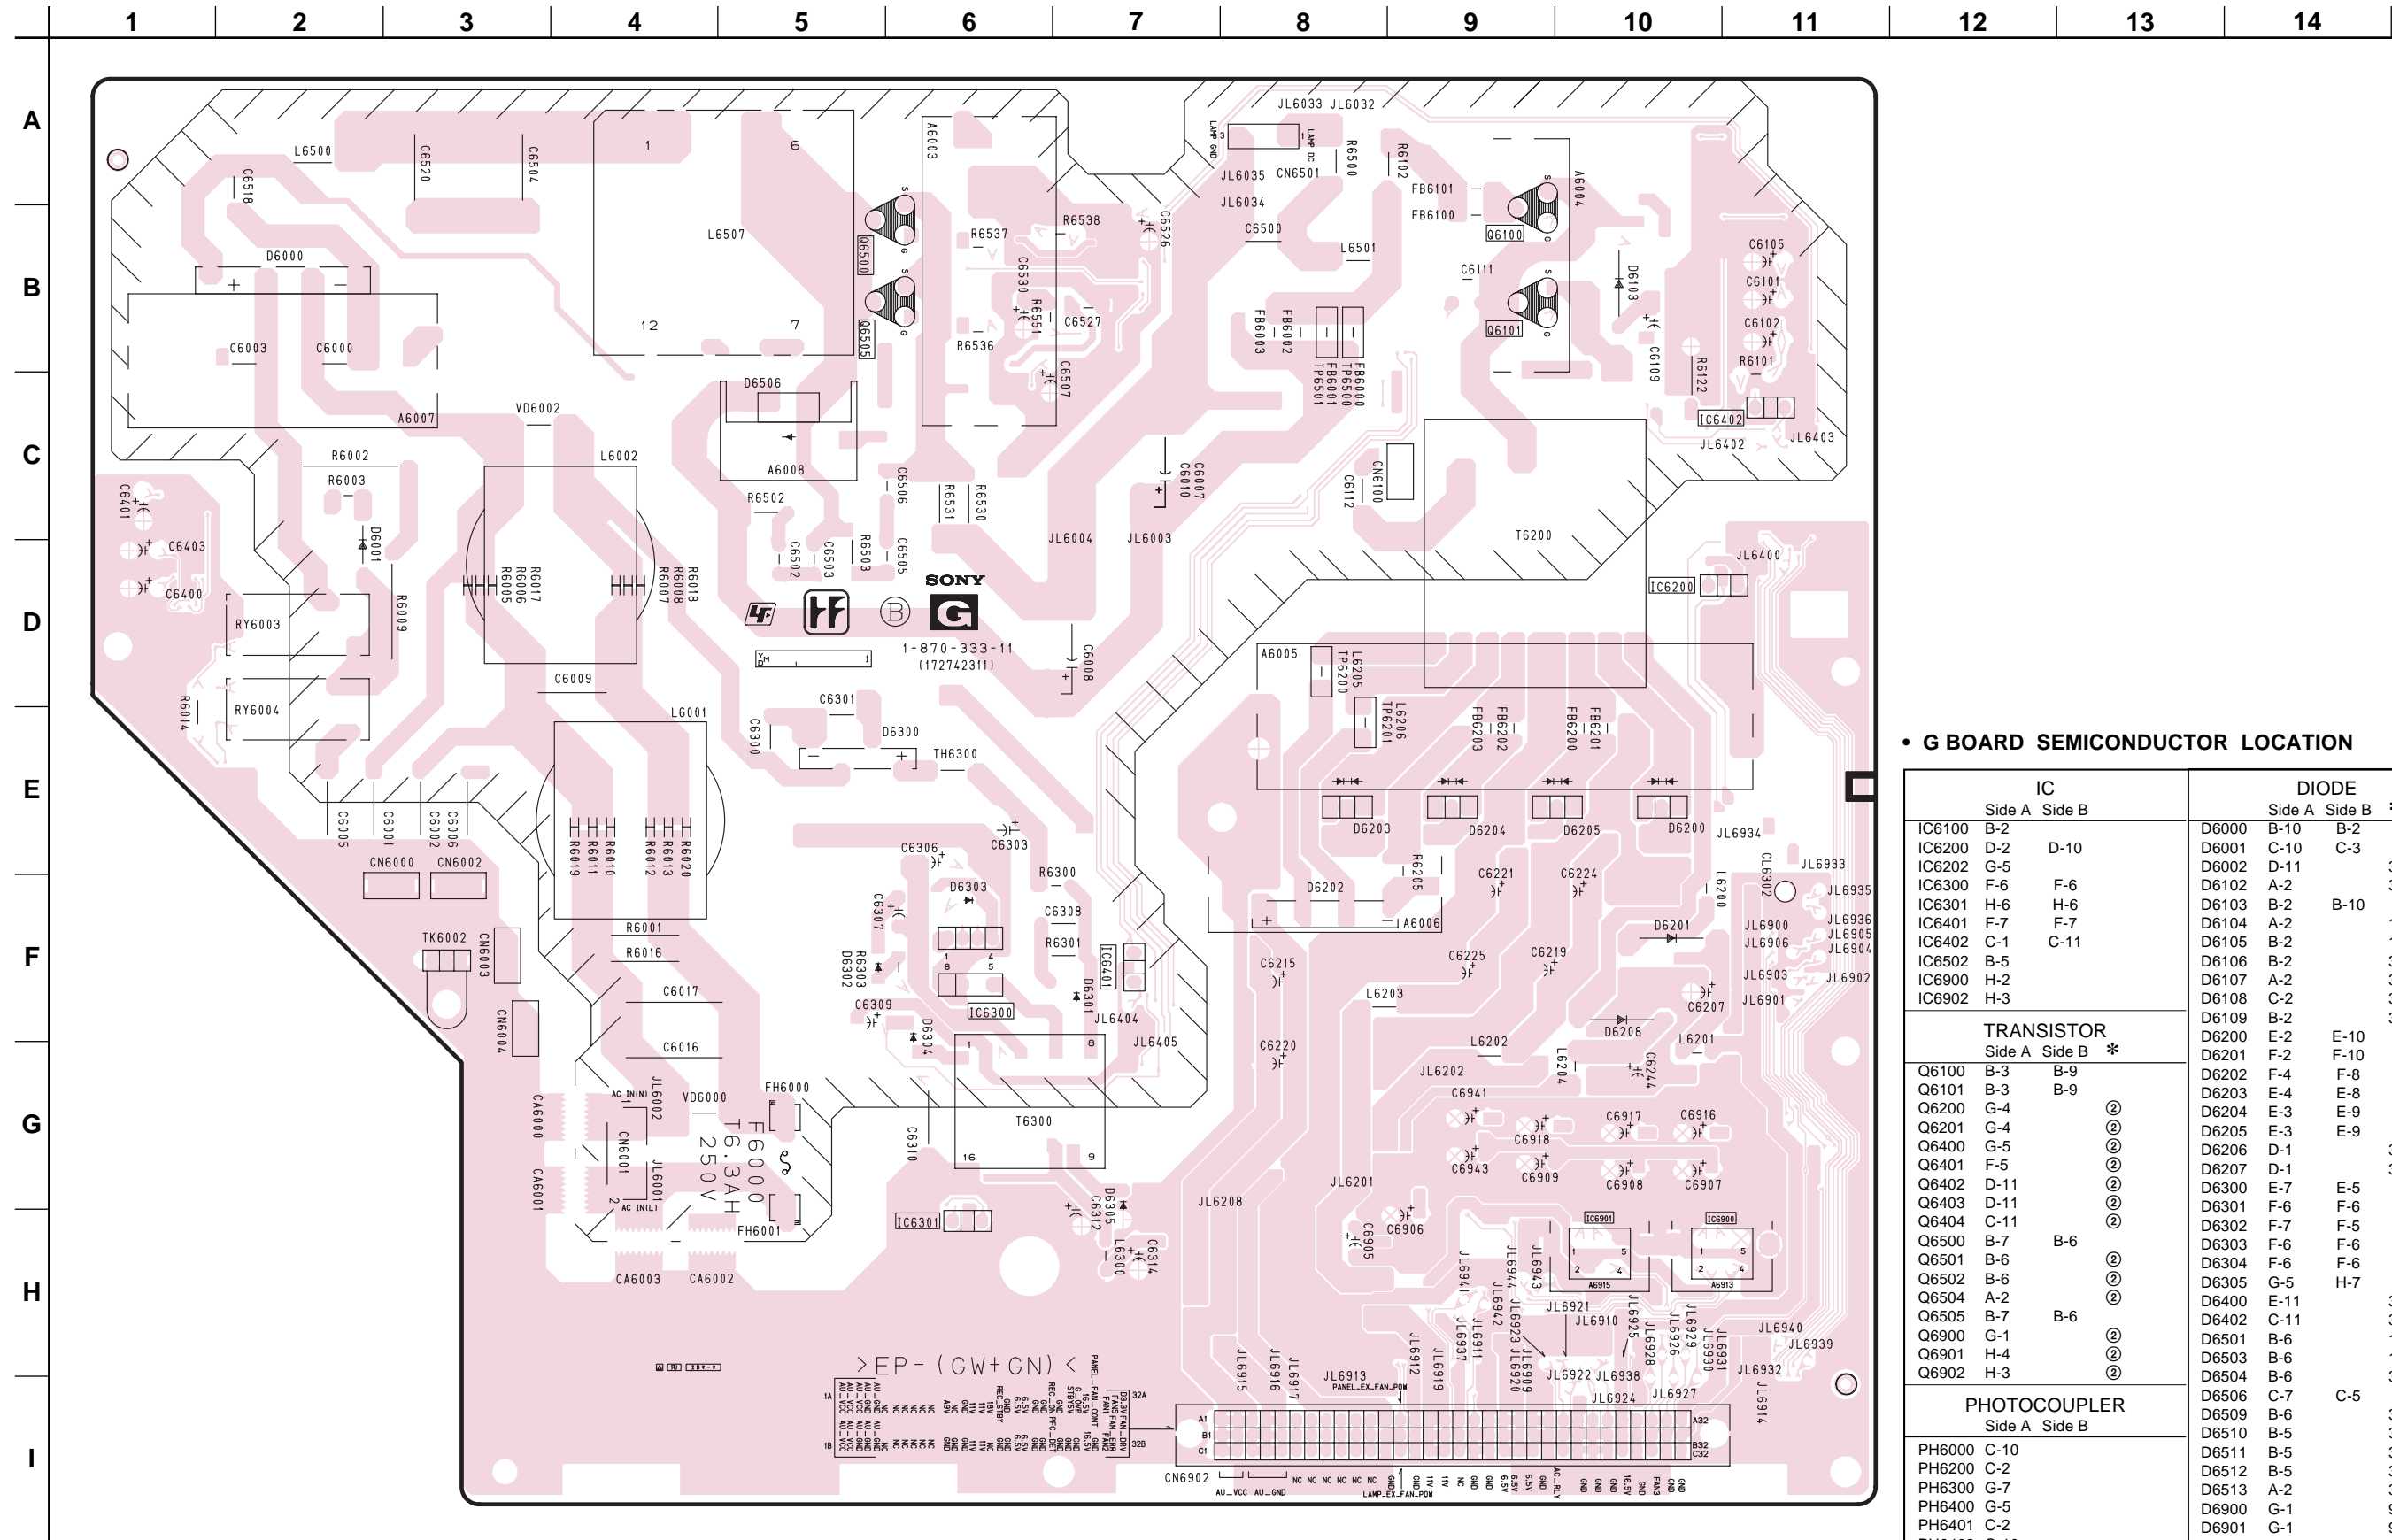


• G BOARD SEMICONDUCTOR LOCATION

IC		DIODE			
Side A	Side B	Side A	Side B	*	
IC6100	B-2	D6000	B-10	B-2	
IC6200	D-2	D6001	C-10	C-3	
IC6202	G-5	D6002	D-11	3	
IC6300	F-6	D6102	A-2	3	
IC6301	H-6	D6103	B-2	B-10	
IC6401	F-7	D6104	A-2	10	
IC6402	C-1	D6105	B-2	10	
IC6502	B-5	D6106	B-2	3	
IC6900	H-2	D6107	A-2	3	
IC6902	H-3	D6108	C-2	3	
TRANSISTOR		D6109	B-2	3	
Side A	Side B	*	D6200	E-2	E-10
Q6100	B-3	B-9	D6201	F-2	F-10
Q6101	B-3	B-9	D6202	F-4	F-8
Q6200	G-4	②	D6203	E-4	E-8
Q6201	G-4	②	D6204	E-3	E-9
Q6400	G-5	②	D6205	E-3	E-9
Q6401	F-5	②	D6206	D-1	3
Q6402	D-11	②	D6207	D-1	3
Q6403	D-11	②	D6300	E-7	E-5
Q6404	C-11	②	D6301	F-6	F-6
Q6500	B-7	B-6	D6302	F-7	F-5
Q6501	B-6	②	D6303	F-6	F-6
Q6502	B-6	②	D6304	F-6	F-6
Q6504	A-2	②	D6305	G-5	H-7
Q6505	B-7	B-6	D6400	E-11	3
Q6900	G-1	②	D6402	C-11	3
Q6901	H-4	②	D6501	B-6	10
Q6902	H-3	②	D6503	B-6	10
PHOTOCOUPLER		D6504	B-6	3	
Side A	Side B	D6506	C-7	C-5	
PH6000	C-10	D6509	B-6	3	
PH6200	C-2	D6510	B-5	3	
PH6300	G-7	D6511	B-5	3	
PH6400	G-5	D6512	B-5	3	
PH6401	C-2	D6513	A-2	3	
PH6402	C-10	D6900	G-1	9	
		D6901	G-1	9	
		D6902	G-2	9	
		D6904	G-3	9	


\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 37)



(9) H1, H2 Boards

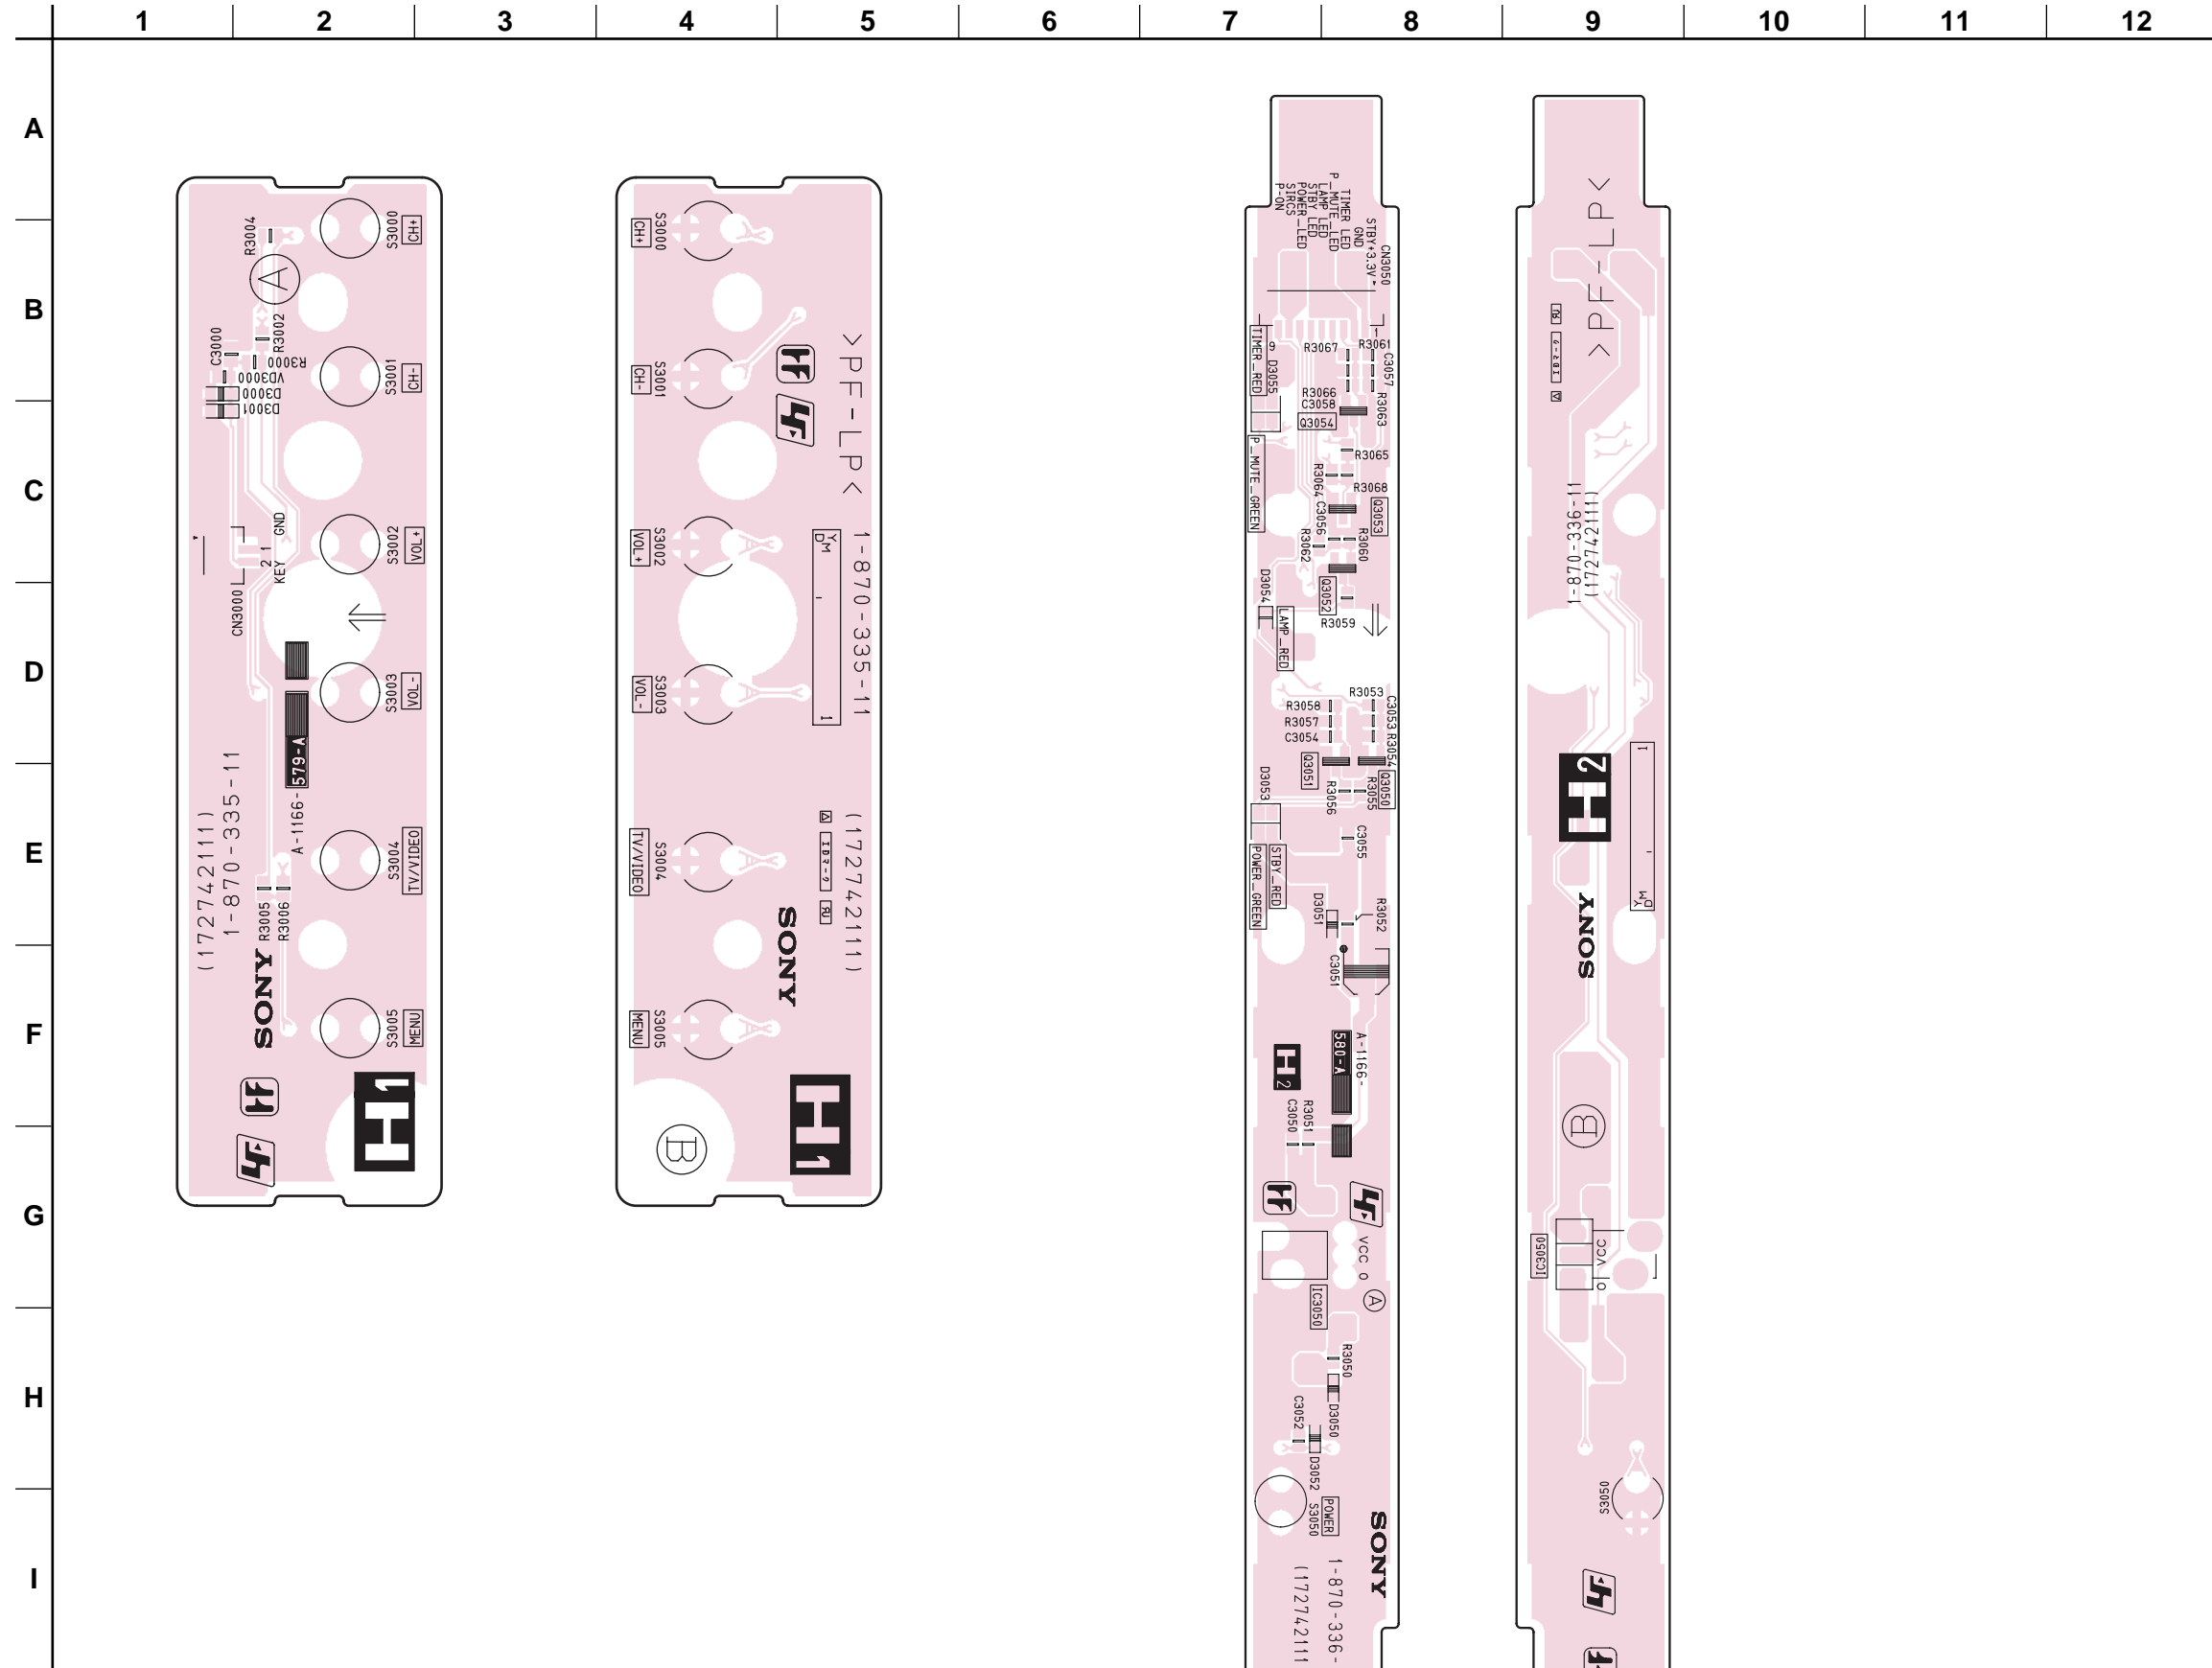


(10) H3 Boards

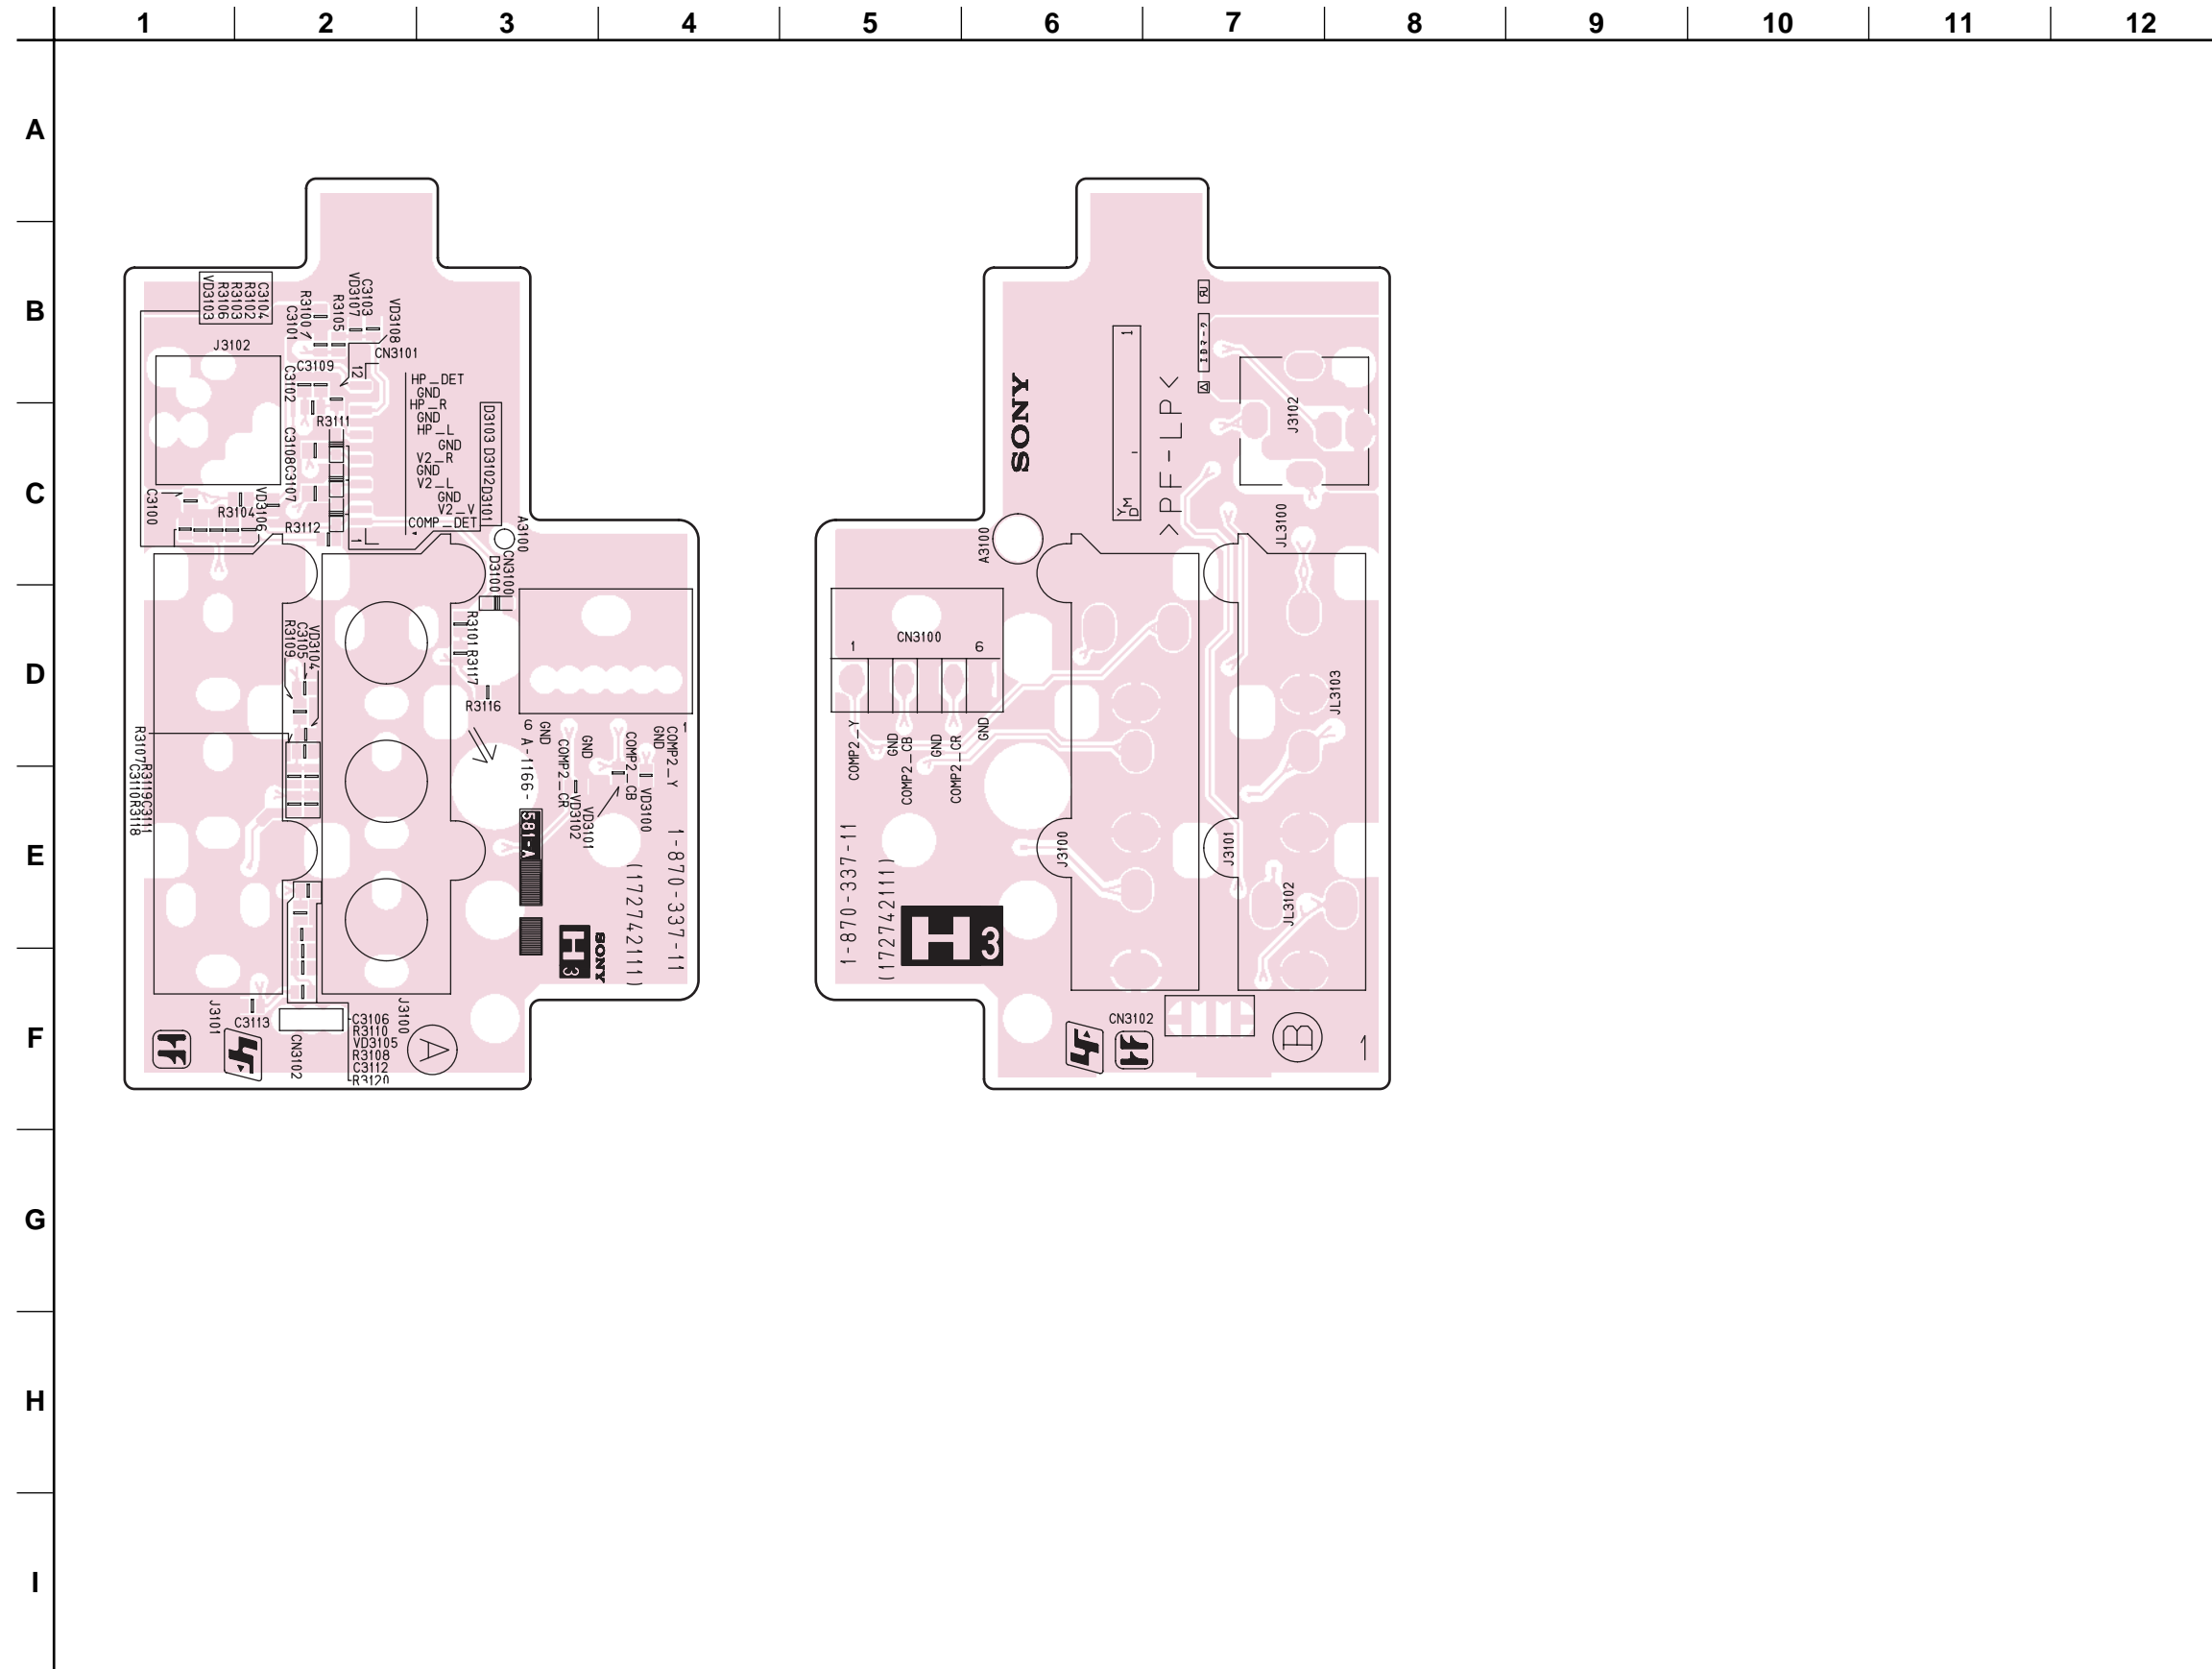




(12) QM Board (Side B)

Text Search

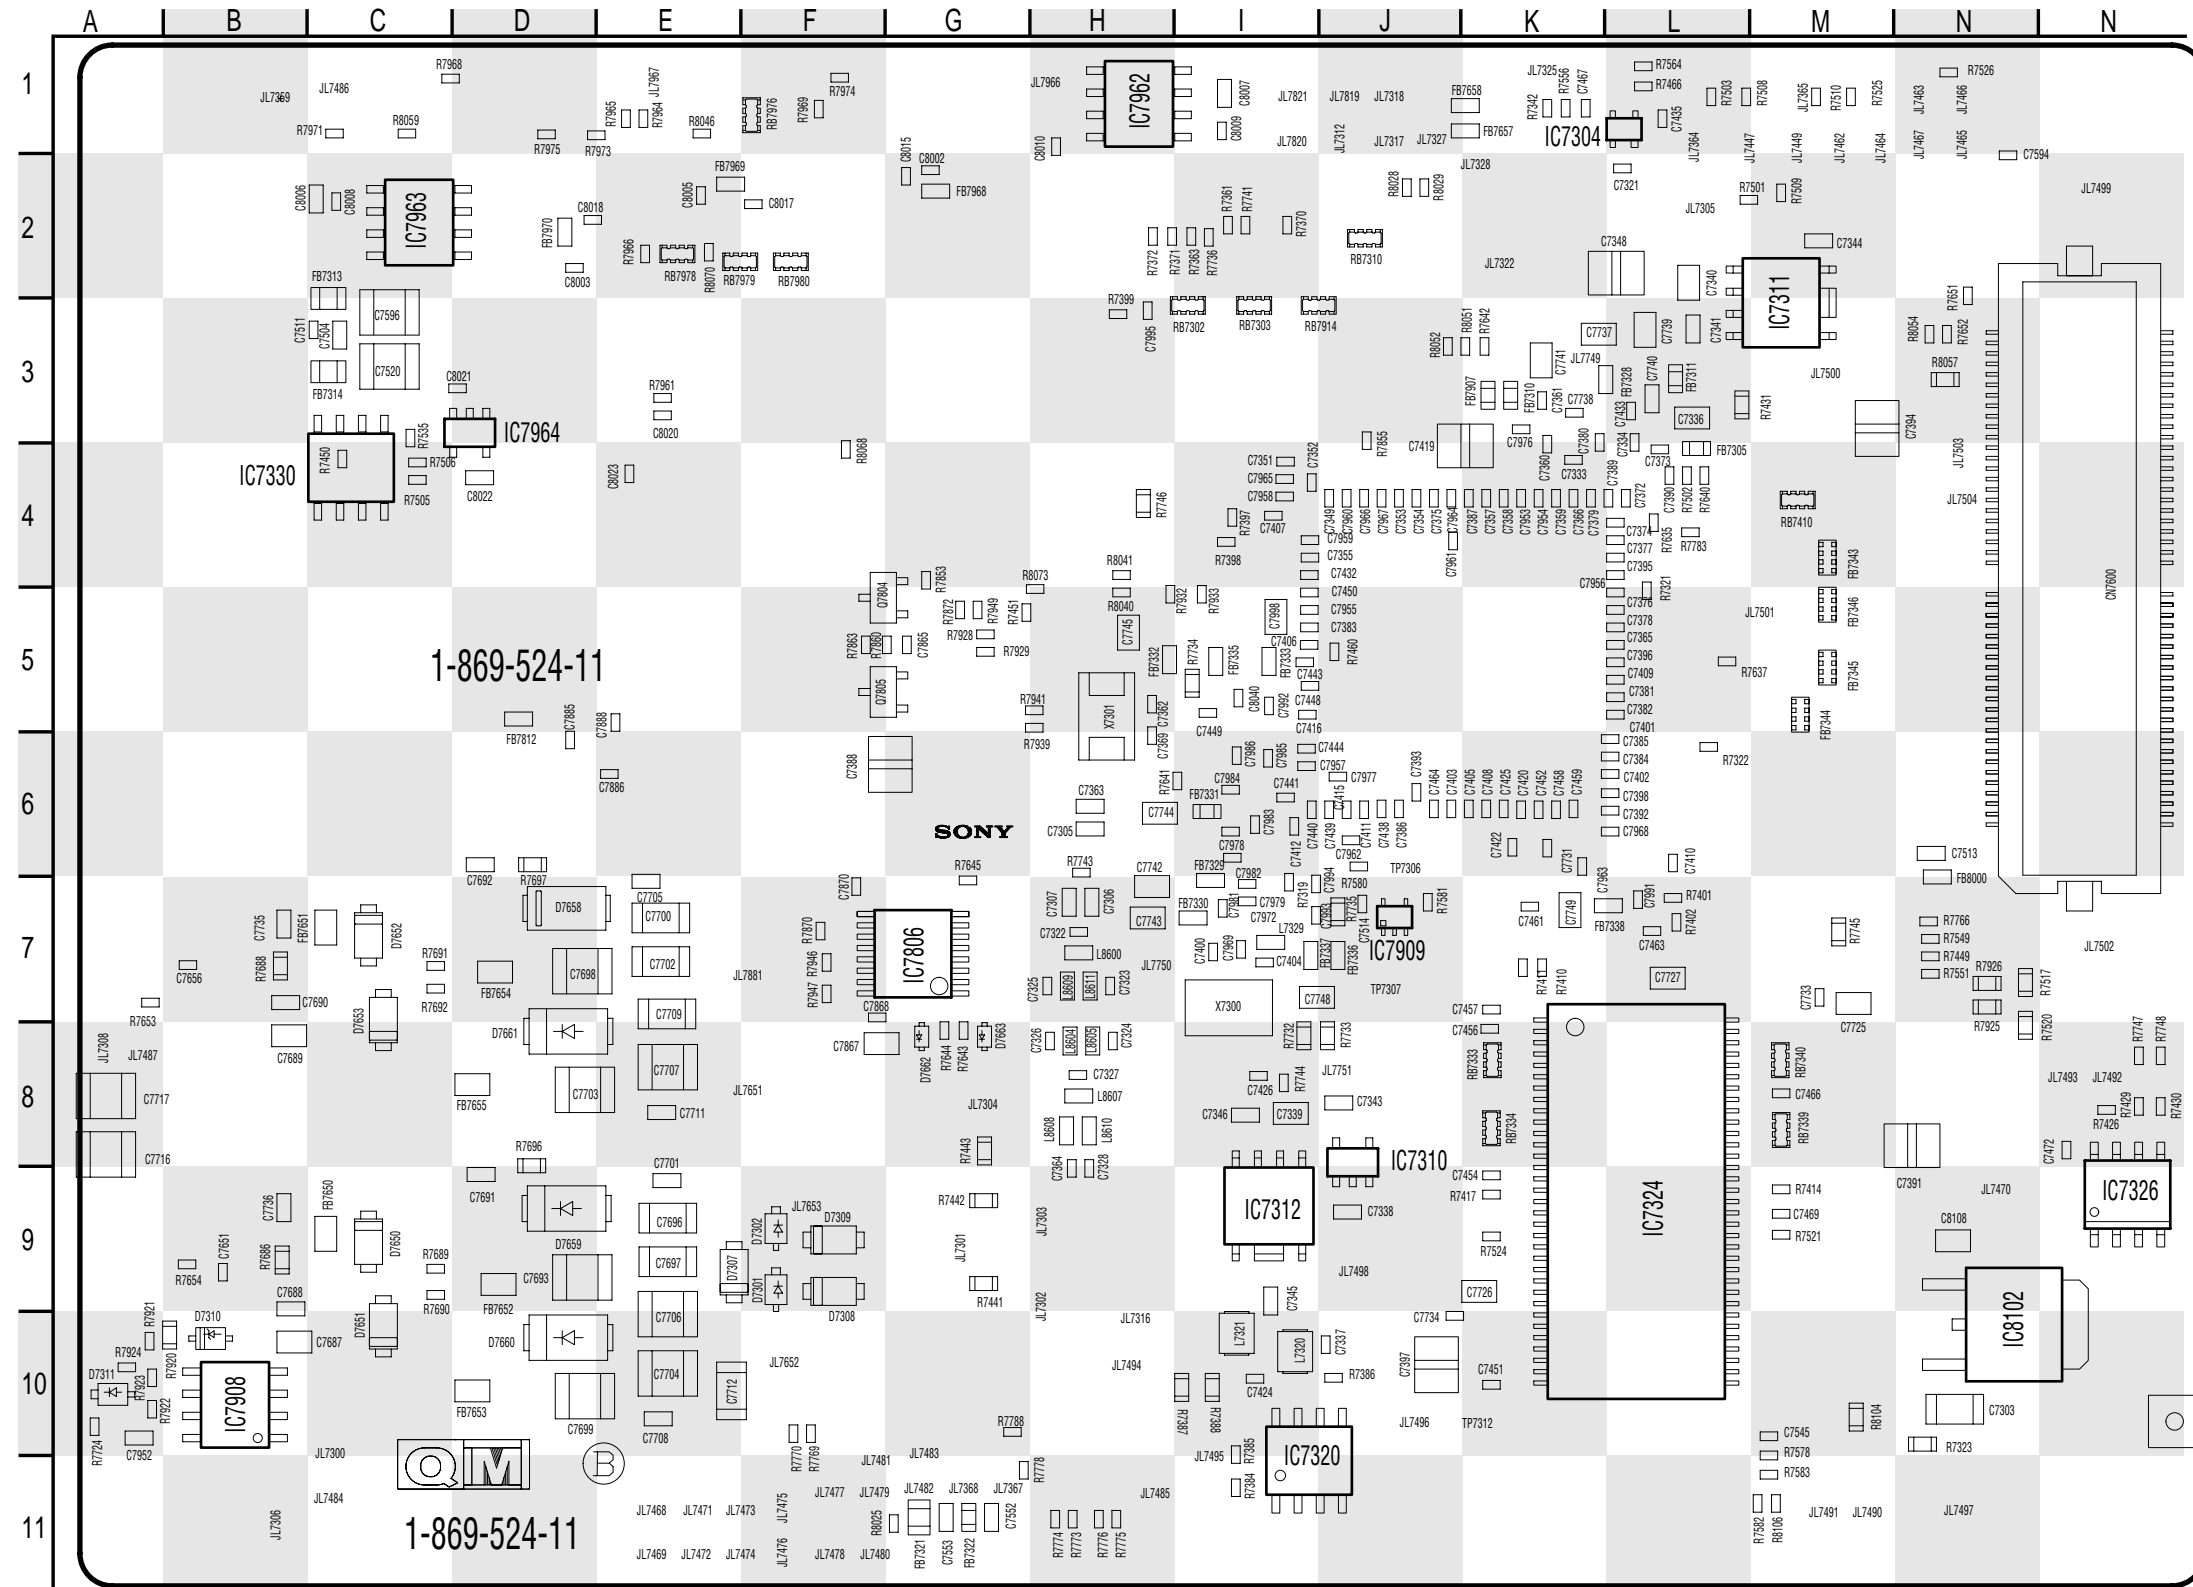


(13) QT Board (Side A)

Text Search

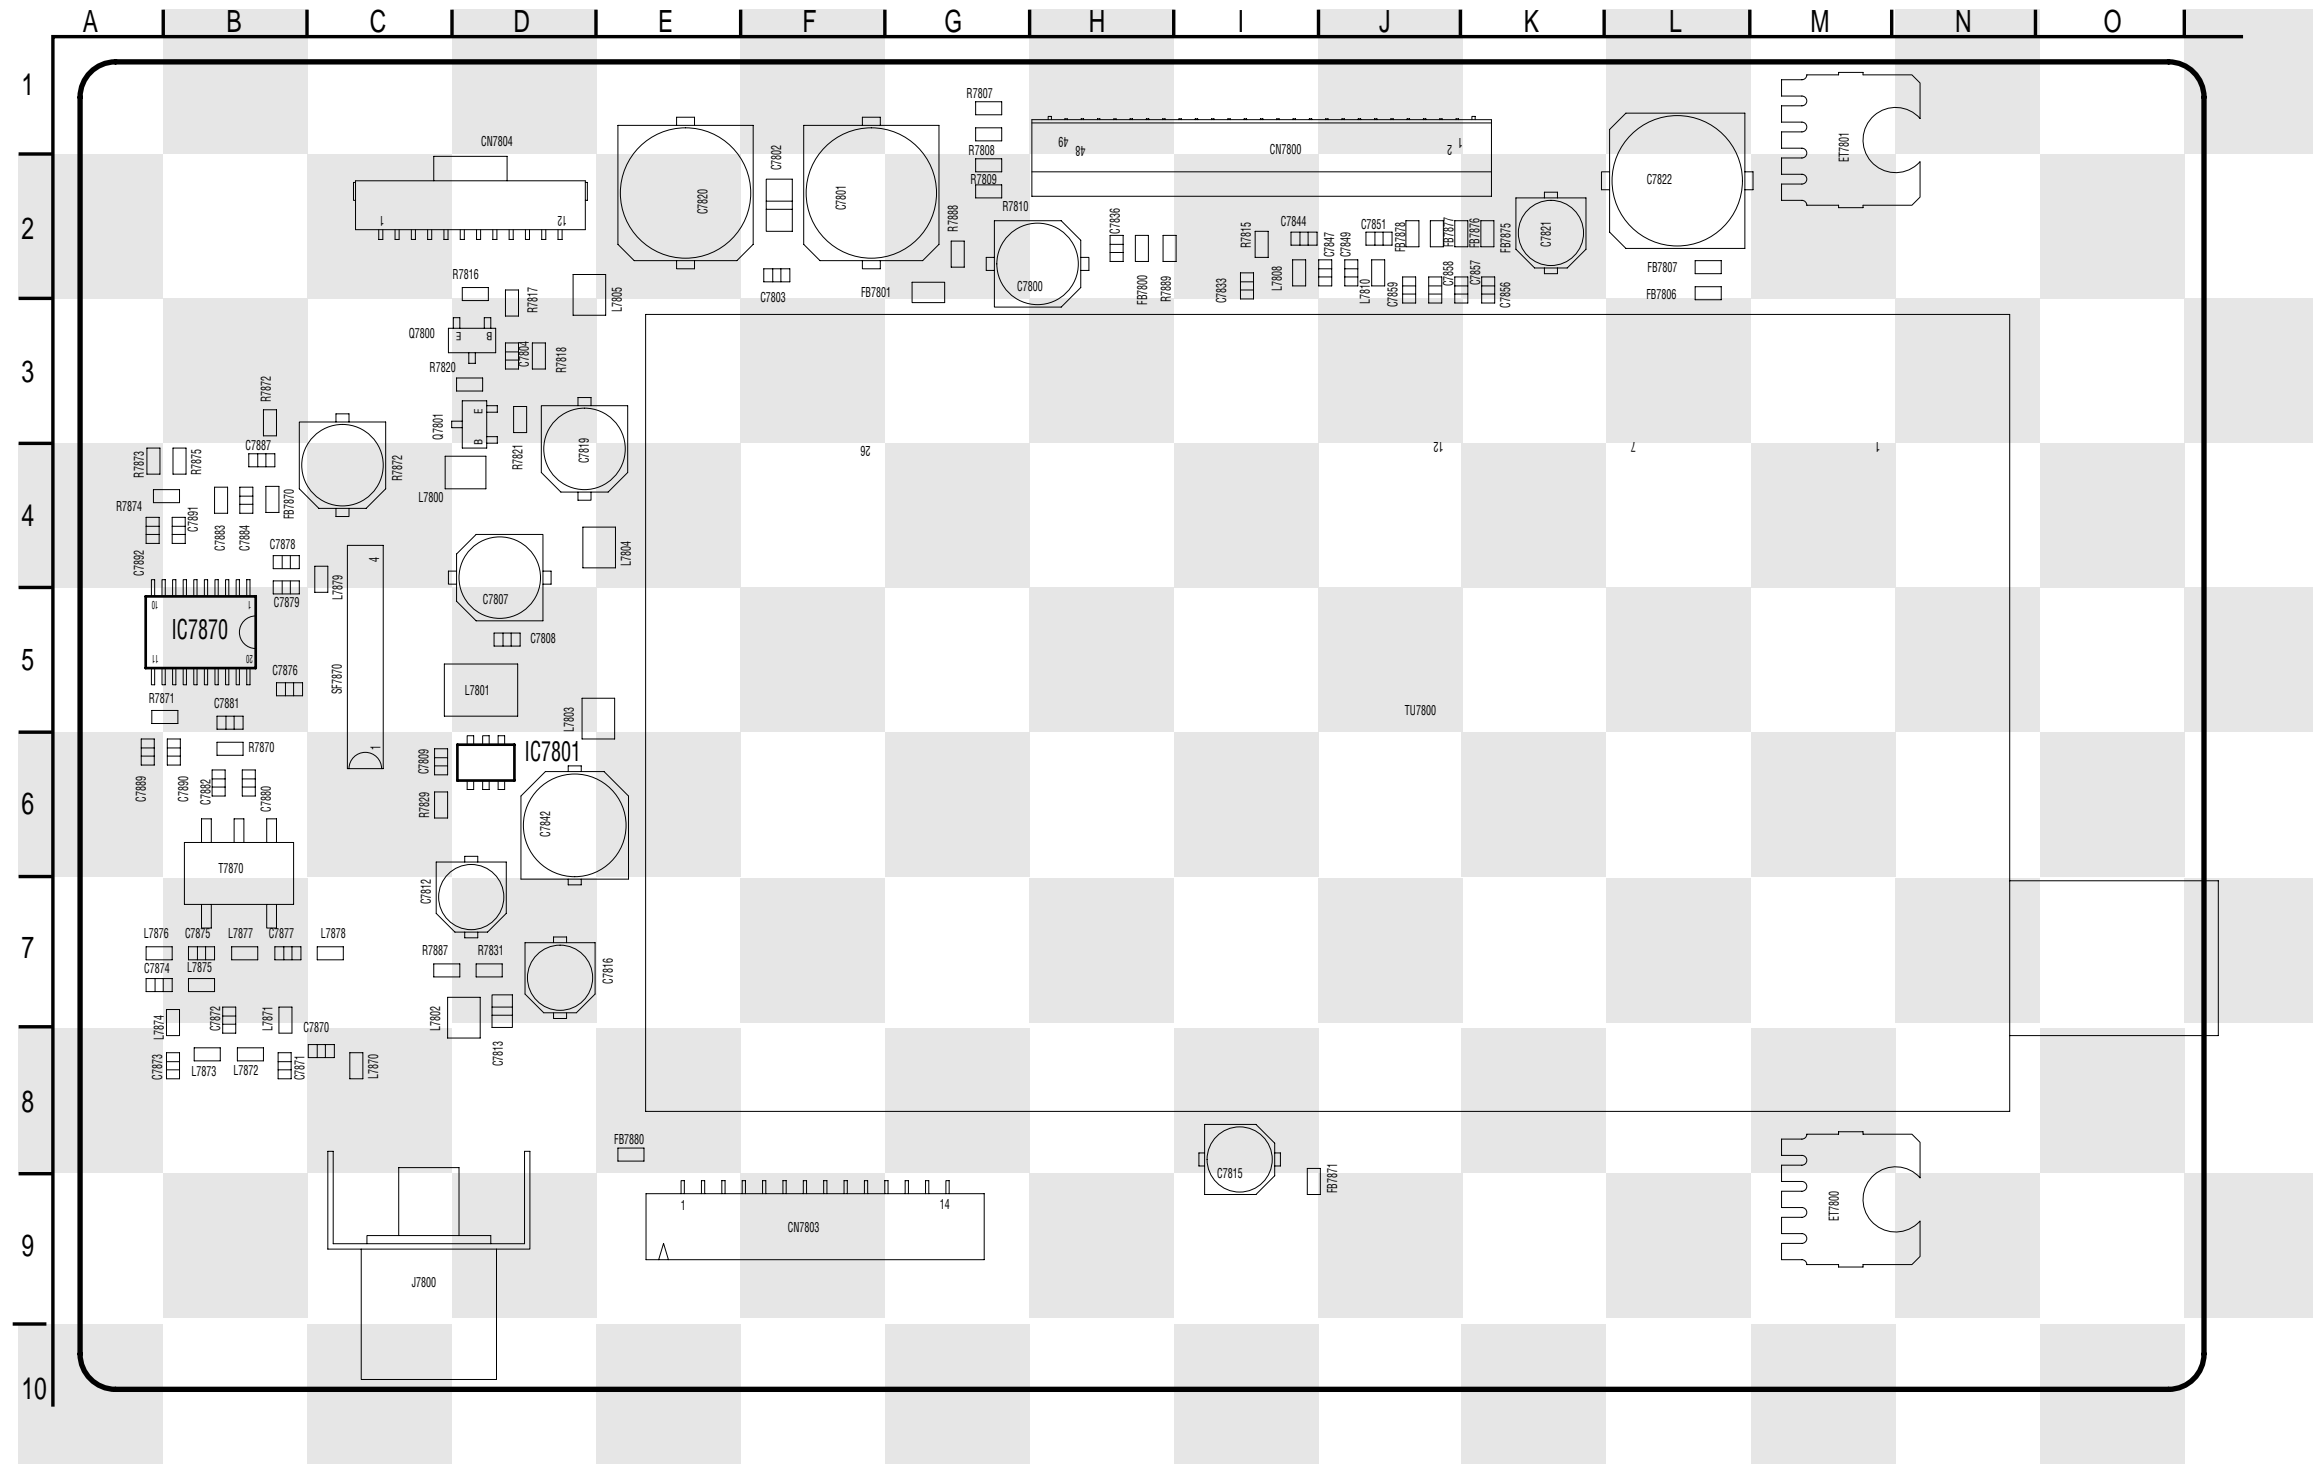




(15) S1, S2, T Board

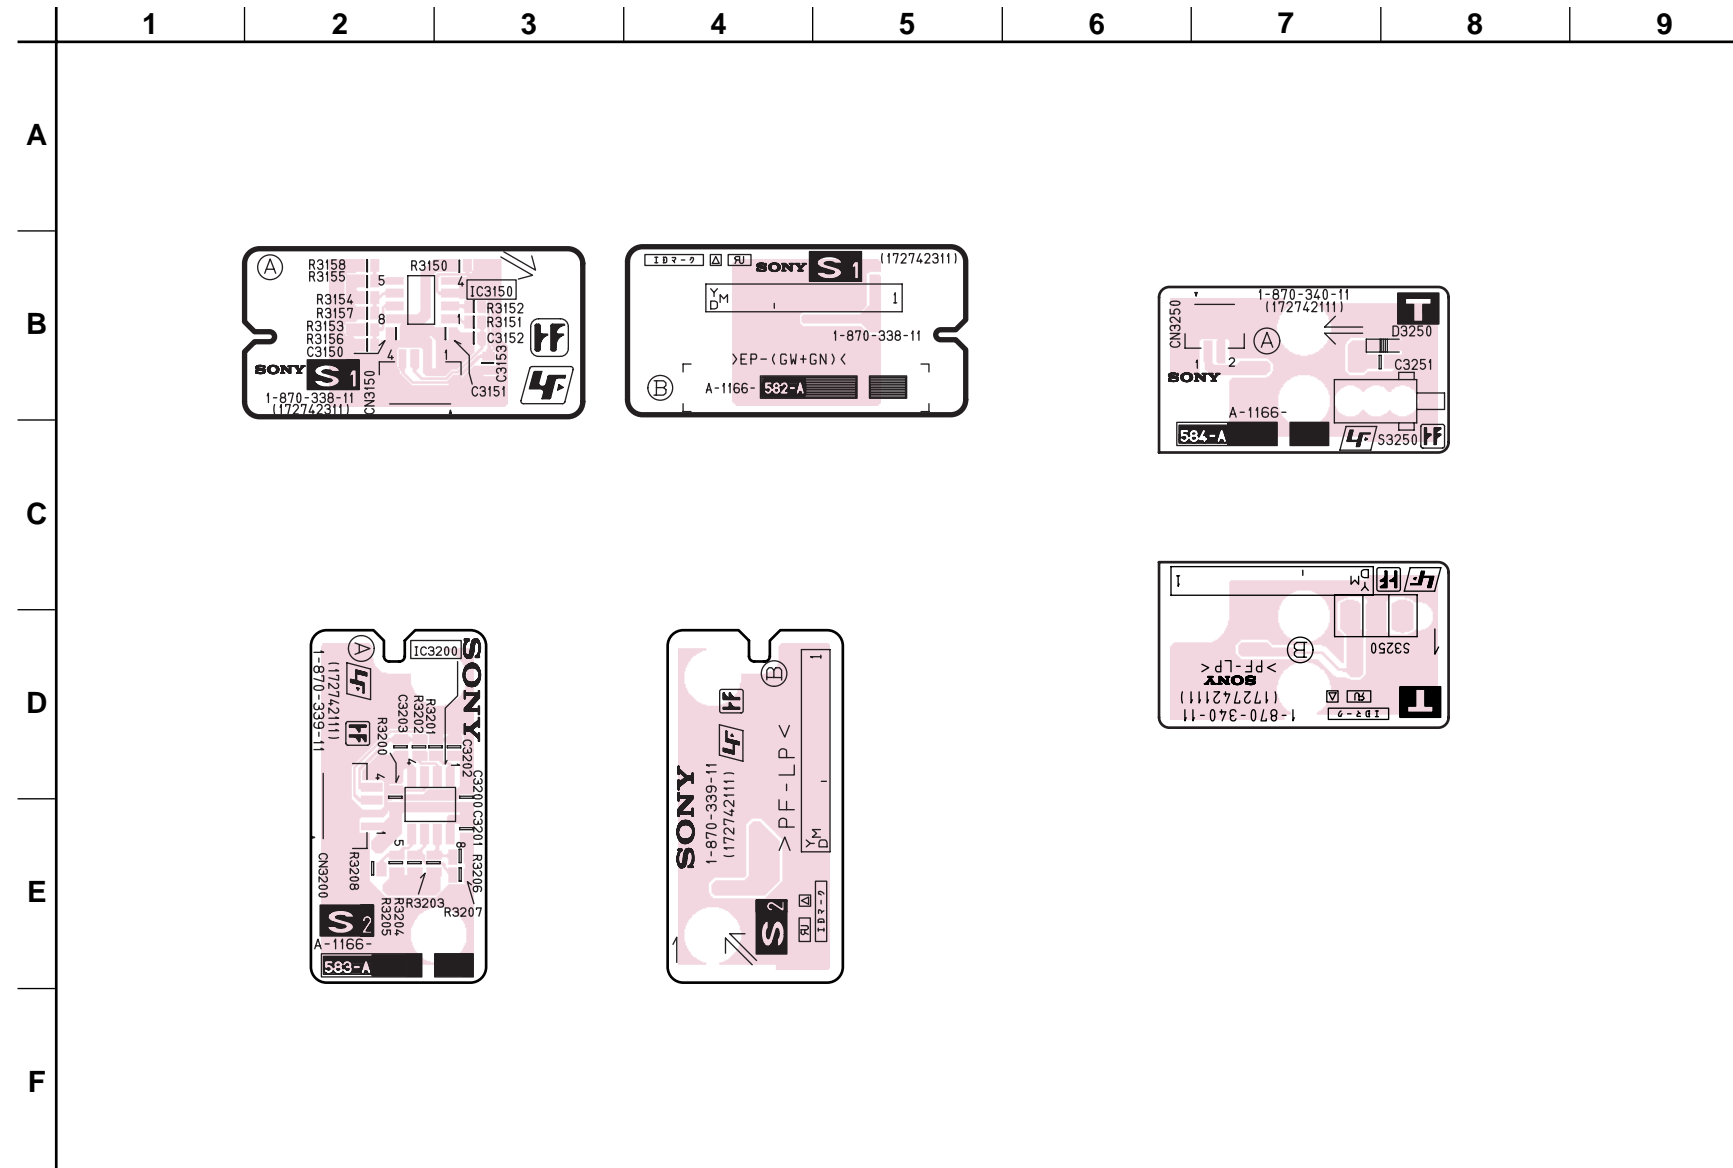


**4-6. SEMICONDUCTORS**


CXA1875AM-T4




10ERB20-TB3  
RD5.6SB-T1




M1MA152WK-T1




M24C02-WMN6T(B)  
M24C64-WMN6T(B)  
MM1096AFF  
NJM4558V-TE2




D10SC6M




MM3Z12VT1  
MM3Z16VST1  
MM3Z3V9T1




PQ070XHA1ZPH




D1NL40-TA2  
D2SB60A-F04  
D4SBS6




SEC1901C



TLC2933AIPWR




SML-020MVT-T86




14PIN

2PA1576A-115  
2PC4081R-115  
2SA1037K-T146-R  
2SA1576A-T106-QR  
2SB624-BV5  
2SC1623-L5L6  
2SC3624A-T1L15L16  
2SC4081-R  
2SC4178-F14  
2SD596-DV5  
DTC114EUA  
DTC114YUA  
DTC144EUA-T106


D1NS6-TR2  
ERA22-08KFLB  
S3L20UF4




SML-310LTT86  
SML-310MTT86



DTZ10B  
MA111-TX  
MA113-(TX)  
MMDL914T1  
UDZ-TE-17-6.8B  
UDZ-TE-17-7.5B  
UDZS-TE-17-3.3B  
UDZS-TE-17-3.9B  
UDZS-TE-17-5.6B



2SB1122-S  
2SD1621-S  
2SK2036(TE85L)





## SECTION 5 EXPLODED VIEWS

**NOTE:**

- Items with no part number and no description are not stocked because they are seldom required for routine service
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.


The components identified by shading and mark are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by mark contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

Les composants identifiés par la marque contiennent des informations confidentielles. Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et/ou réparé.

**1. SCREEN, COVERS**

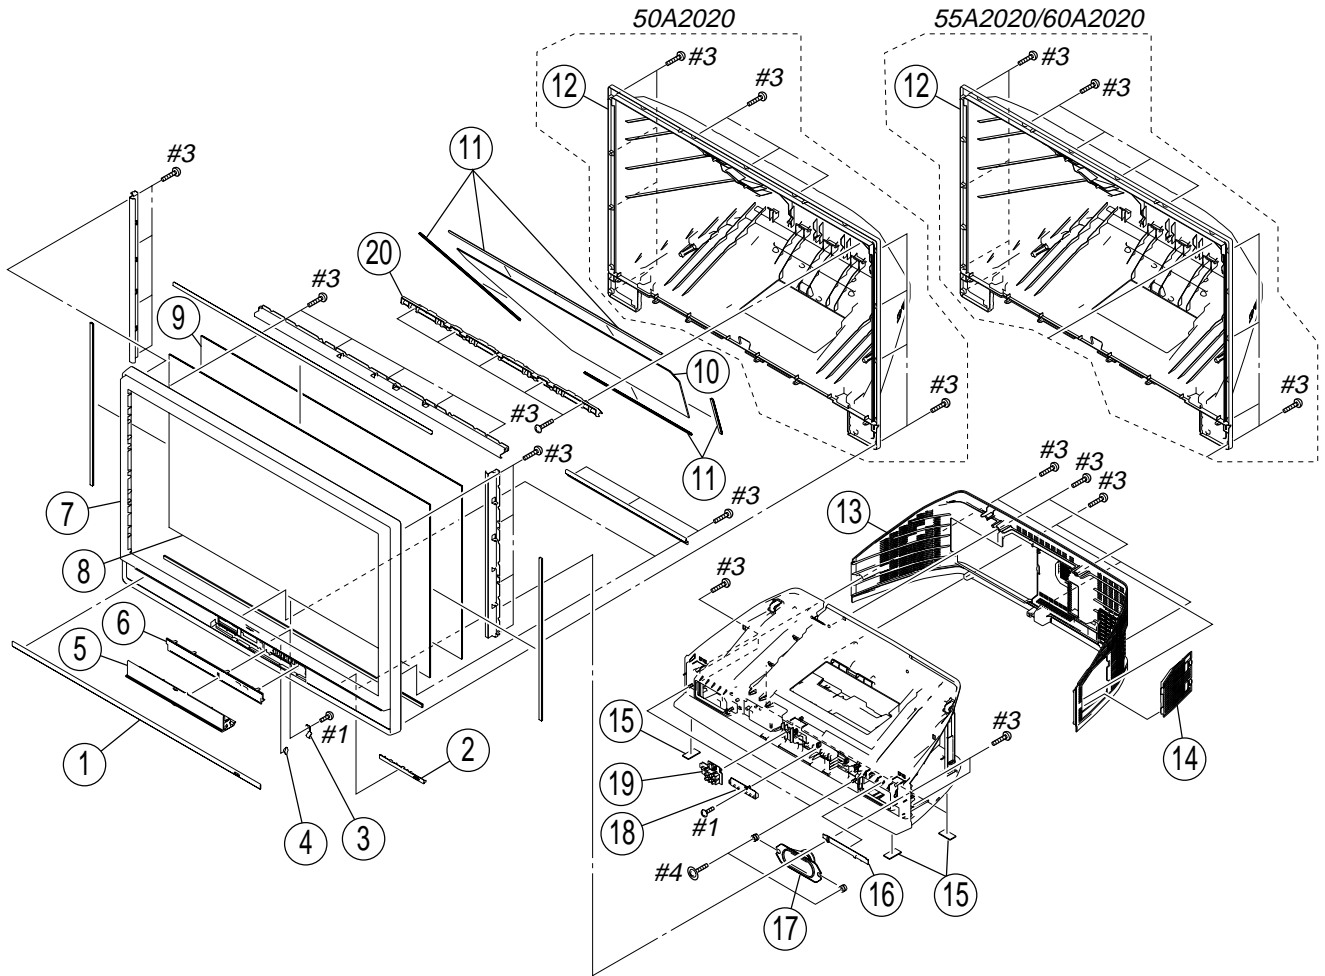

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
1	A-1258-494-A	PANEL, INDICATOR (60) ASSY	(60A2020)	11	2-682-305-01	GUARD, MIRROR EDGE	(50A2020)
1	A-1258-497-A	PANEL, INDICATOR (55) ASSY	(55A2020)	11	2-682-305-11	GUARD, MIRROR EDGE	(55A2020)
1	A-1258-500-A	PANEL, INDICATOR (50) ASSY	(50A2020)	11	2-682-305-21	GUARD, MIRROR EDGE	(60A2020)
2	2-675-306-01	GUIDE, LED		12	A-1258-492-A	COVER, MIRROR (60) ASSY	(60A2020)
3	2-675-309-01	SPRING, FRONT DOOR		12	A-1258-495-A	COVER, MIRROR (55) ASSY	(55A2020)
4	3-973-975-01	DAMPER, OIL		12	A-1258-498-A	COVER, MIRROR (50) ASSY	(50A2020)
5	2-675-307-51	DOOR, CONTROL		13	A-1258-490-A	COVER ASSY, REAR	
6	2-675-308-31	BRACKET, TERMINAL (FR)		14	2-675-132-31	COVER, DOOR	
7	A-1258-493-A	SCREEN FRAME ASSY (60)	(60A2020)	15	4-097-548-01	CUSHION, FOOT	
7	A-1258-496-A	SCREEN FRAME ASSY (55)	(55A2020)	16	A-1166-580-B	H2 BOARD, COMPLETE	
7	A-1258-499-A	SCREEN FRAME ASSY (50)	(50A2020)	17	1-826-475-11	LOUDSPEAKER (6.5X13cm)	
8	2-679-056-11	DIFFUSION PLATE (50L)	(50A2020)	18	A-1166-579-A	H1 BOARD, COMPLETE	
8	2-679-058-11	DIFFUSION PLATE (55L)	(55A2020)	19	A-1166-581-A	H3 BOARD, COMPLETE	
8	2-679-060-11	DIFFUSION PLATE (60L)	(60A2020)	20	2-675-263-01	HOLDER, MIRROR (50)	(50A2020)
9	2-679-059-11	DIFFUSION PLATE (55F)	(55A2020)	20	2-675-264-01	HOLDER, MIRROR (55/60)	(55A2020, 60A2020)
9	2-679-061-11	DIFFUSION PLATE (60F)	(60A2020)				
9	2-687-107-11	DIFFUSION PLATE (50F)	(50A2020)	#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
10	A-1202-041-A	MIRROR (60) ASSY	(60A2020)	#3	2-580-640-01	SCREW, +BVTP2 4X16	
10	A-1202-042-A	MIRROR (55) ASSY	(55A2020)	#4	2-580-654-01	SCREW, +PWTP2 4X16	
10	A-1202-043-A	MIRROR (50) ASSY	(50A2020)				


2. CHASSIS ASSEMBLY

The components identified by shading and mark  $\Delta$  are critical for safety. Replace only with part number specified.

The components identified by mark  $\hat{c}$  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

Les composants identifiés par une trame et une marque  $\Delta$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Les composants identifiés par la marque  $\hat{c}$  contiennent des informations confidentielles. Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et/ou réparé.

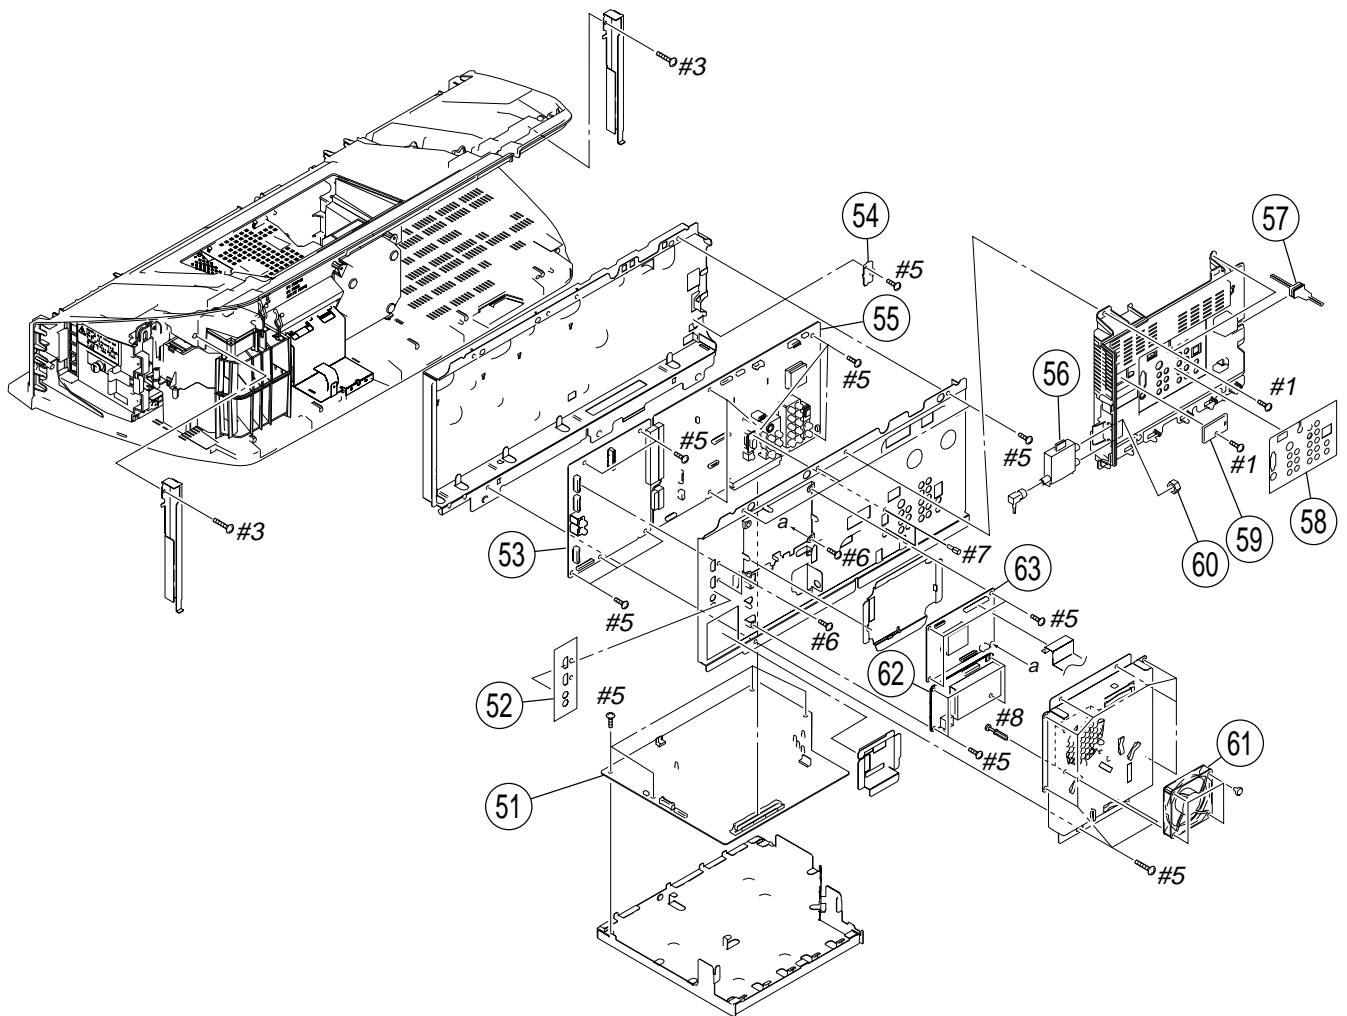


REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
51	A-1186-654-A	G BOARD, COMPLETE		60	3-682-691-00	NUT, WASHER HEXAGON	
52	2-675-143-01	LABEL,HDMI		61	$\Delta$ 1-787-333-11	D.C. FAN	
53	$\hat{c}$ A-1205-147-A	B1 BOARD, COMPLETE		62	A-1206-154-A	QT BOARD, COMPLETE	
54	* A-1166-582-A	S1 BOARD, COMPLETE		63	A-1205-237-B	QM BOARD, COMPLETE	
55	A-1205-144-B	A1 BOARD, COMPLETE	(60A2020)	#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
55	A-1205-145-B	A1 BOARD, COMPLETE	(55A2020)	#3	2-580-640-01	SCREW, +BVTP2 4X16	
55	A-1205-146-B	A1 BOARD, COMPLETE	(50A2020)	#5	2-580-628-01	SCREW, +BVST 3X6	
56	$\Delta$ 1-417-716-11	ANTENNA SW		#6	2-580-590-01	SCREW, +PSW M3X5	
57	$\Delta$ 1-827-159-21	CORD, AC POWER (WITH CONNECTOR)		#7	2-580-626-01	SCREW, SP 4-40 UNC	
58	2-675-142-01	LABEL,TERMINAL		#8	2-689-898-01	RIVET, TURN	
59	4-069-675-01	CAP, TERMINAL BOARD					

3. OPTICS BLOCK

The components identified by shading and mark  $\triangle$  are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque  $\triangle$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

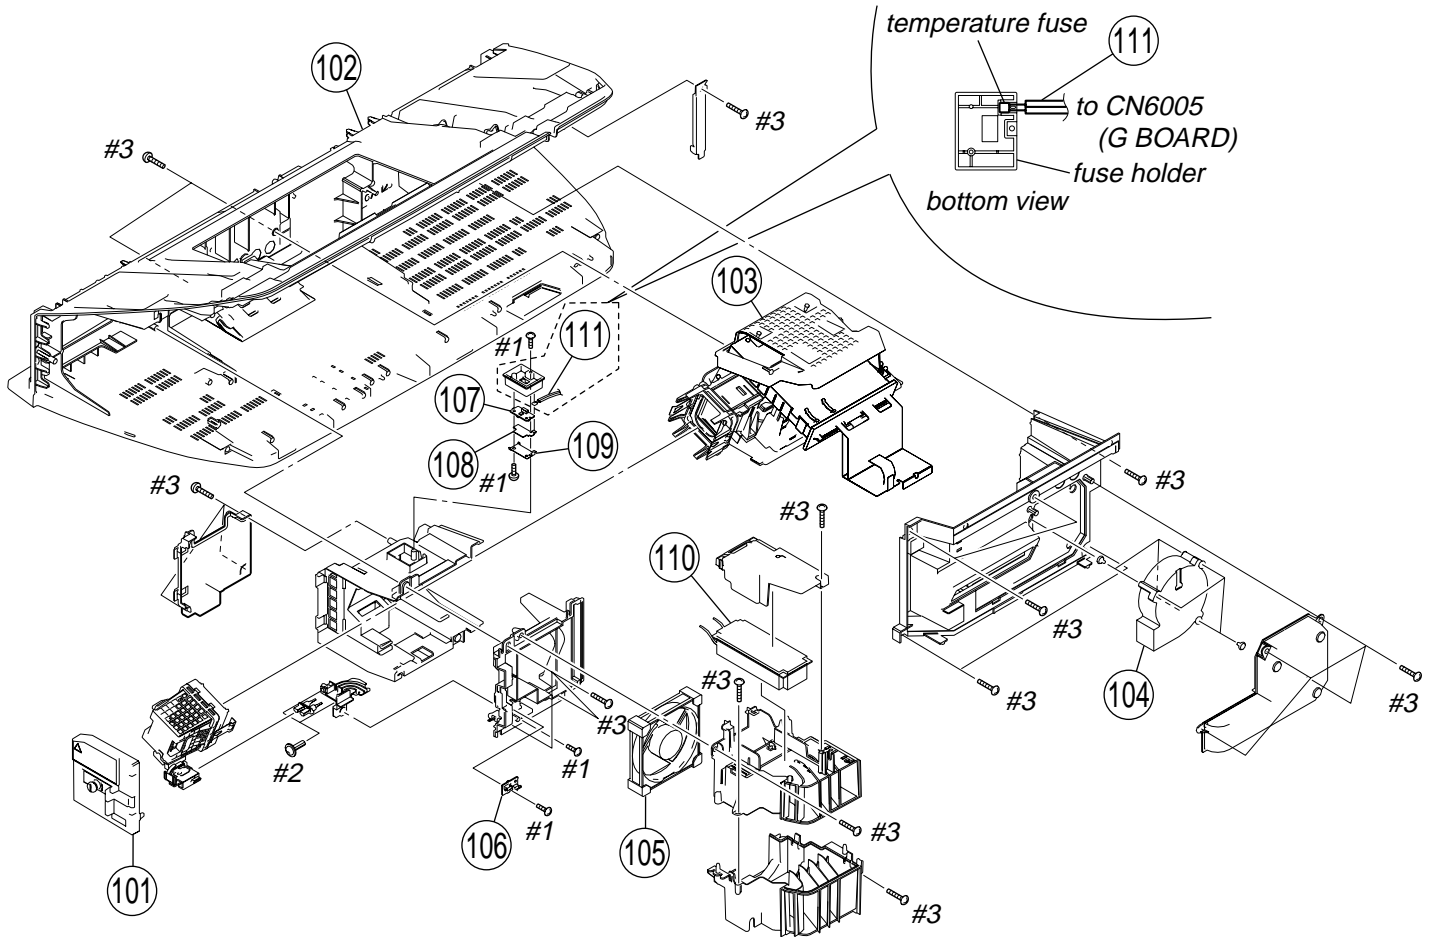

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
101	X-2109-529-1	DOOR ASSY, LAMP		108	2-691-973-01	SHEET, FUSE	
102	A-1258-491-A	CABINET ASSY, BOTTOM		109	2-691-972-01	PLATE, FUSE	
103	$\triangle$ A-1203-194-A	OPTICS BLOCK ASSY (A60)	(60A2020)	110	$\triangle$ 1-474-012-21	POWER SUPPLY BLOCK	
103	$\triangle$ A-1203-195-A	OPTICS BLOCK ASSY (A55)	(55A2020)	111	$\triangle$ 1-910-028-27	CONNECTOR ASSY 2P	(including temperature fuse)
103	$\triangle$ A-1203-196-A	OPTICS BLOCK ASSY (A50)	(50A2020)				
104	$\triangle$ 8-835-873-11	MOTOR, DC SFF24A/C-NP		#1	7-685-648-79	SCREW +BVTP 3X12 TYPE2 IT-3	
105	$\triangle$ 8-835-860-31	MOTOR, DC SFF21C/C-NP		#2	7-685-903-31	SCREW +PTPWH 3X10 (TYPE2)	
106	A-1166-584-A	T BOARD, COMPLETE		#3	2-580-640-01	SCREW, +BVTP2 4X16	
107	A-1166-583-A	S2 BOARD, COMPLETE					

## SECTION 6

## ELECTRICAL PARTS LIST

A1

The components identified by shading and mark  $\triangle$  are critical for safety.  
Replace only with part number specified.

The components identified by mark  $\square$  contain confidential information.  
Strictly follow the instructions whenever the components are repaired and/or replaced.

Les composants identifiés par une trame et une marque  $\triangle$  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

Les composants identifiés par la marque  $\square$  contiennent des informations confidentielles.  
Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et/ou réparé.

When indicating parts by reference number, please include the board name.

- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- RESISTORS  
All resistors are in ohms  
F : nonflammable
- CAPACITORS  
PF :  $\mu\text{F}$
- There are some cases the reference number on one board overlaps on the other board. Therefore, when ordering parts by the reference number, please include the board name.

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
	A-1205-144-B	A1 BOARD, COMPLETE	(60A2020)	C8067	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
	A-1205-145-B	A1 BOARD, COMPLETE	(55A2020)	C8068	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
	A-1205-146-B	A1 BOARD, COMPLETE	(50A2020)	C8070	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
	*****						
	< CAPACITOR >						
C8002	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8071	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
C8003	1-128-993-21	ELECT CHIP 22uF	20% 10V	C8072	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
C8004	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8073	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8005	1-128-993-21	ELECT CHIP 22uF	20% 10V	C8075	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8006	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8076	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8009	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8077	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8011	1-128-993-21	ELECT CHIP 22uF	20% 10V	C8078	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8012	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8079	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8013	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8080	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8014	1-128-993-21	ELECT CHIP 22uF	20% 10V	C8081	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8015	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8086	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V
C8016	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8087	1-112-777-11	CERAMIC CHIP 0.01uF	10% 25V
C8017	1-112-777-11	CERAMIC CHIP 0.01uF	10% 25V	C8088	1-112-777-11	CERAMIC CHIP 0.01uF	10% 25V
C8018	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8089	1-112-777-11	CERAMIC CHIP 0.01uF	10% 25V
C8024	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8300	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
C8026	1-164-874-11	CERAMIC CHIP 100PF	5% 50V	C8303	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8027	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8304	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8028	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8305	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8029	1-165-887-91	CERAMIC CHIP 0.22uF	10% 6.3V	C8306	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8030	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8307	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8035	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8308	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8036	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8309	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8037	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V	C8310	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8038	1-112-733-81	CERAMIC CHIP 20PF	5% 50V	C8311	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8039	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8312	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8040	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8313	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8041	1-164-860-11	CERAMIC CHIP 27PF	5% 50V	C8314	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8043	1-100-905-11	CERAMIC CHIP 0.001uF	10% 50V	C8315	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8044	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8316	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8045	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8317	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8046	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8318	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8047	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8319	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8050	1-162-918-11	CERAMIC CHIP 18PF	5% 50V	C8320	1-112-064-11	CERAMIC CHIP 2.2uF	10% 10V
C8051	1-162-919-11	CERAMIC CHIP 22PF	5% 50V	C8325	1-128-992-21	ELECT CHIP 47uF	20% 25V
C8052	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8326	1-128-992-21	ELECT CHIP 47uF	20% 25V
C8053	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8327	1-128-992-21	ELECT CHIP 47uF	20% 25V
C8060	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8329	1-128-992-21	ELECT CHIP 47uF	20% 25V
C8062	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8330	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
C8063	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8331	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
C8064	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8332	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
C8065	1-112-777-11	CERAMIC CHIP 0.01uF	10% 25V	C8333	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
C8066	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V	C8334	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
				C8335	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
				C8336	1-100-916-11	CERAMIC CHIP 0.1uF	10% 16V
				C8337	1-128-992-21	ELECT CHIP 47uF	20% 25V

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
C8338	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8429	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8339	1-164-939-11	CERAMIC CHIP	0.0022uF 10% 50V	C8430	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8340	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8431	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8341	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8433	1-117-681-11	ELECT CHIP	100uF 20% 16V
C8342	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8434	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8343	1-114-130-11	CERAMIC CHIP	1uF 6.3V	C8435	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8344	1-114-130-11	CERAMIC CHIP	1uF 6.3V	C8438	1-117-681-11	ELECT CHIP	100uF 20% 16V
C8345	1-114-130-11	CERAMIC CHIP	1uF 6.3V	C8439	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V
C8346	1-128-992-21	ELECT CHIP	47uF 20% 25V	C8440	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8347	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8441	1-164-872-11	CERAMIC CHIP	82PF 5% 50V
C8348	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8442	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V
C8350	1-107-819-11	CERAMIC CHIP	0.022uF 10% 16V	C8445	1-117-681-11	ELECT CHIP	100uF 20% 16V
C8351	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8449	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8352	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8450	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V
C8353	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C8452	1-128-992-21	ELECT CHIP	47uF 20% 25V
C8354	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8453	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8355	1-112-777-11	CERAMIC CHIP	0.01uF 10% 25V	C8454	1-128-992-21	ELECT CHIP	47uF 20% 25V
C8356	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8455	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8357	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8525	1-162-918-11	CERAMIC CHIP	18PF 5% 50V
C8358	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8526	1-162-918-11	CERAMIC CHIP	18PF 5% 50V
C8359	1-128-992-21	ELECT CHIP	47uF 20% 25V	C8528	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8360	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C8530	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8361	1-112-777-11	CERAMIC CHIP	0.01uF 10% 25V	C8532	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8362	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8533	1-100-053-21	ELECT CHIP	220uF 20% 6.3V
C8363	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8534	1-112-777-11	CERAMIC CHIP	0.01uF 10% 25V
C8364	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8535	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8366	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8536	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8367	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8537	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8368	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8538	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8369	1-165-875-11	CERAMIC CHIP	10uF 10% 10V	C8539	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8370	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8540	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8372	1-165-875-11	CERAMIC CHIP	10uF 10% 10V	C8542	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8373	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8543	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8374	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8544	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8375	1-112-777-11	CERAMIC CHIP	0.01uF 10% 25V	C8545	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8376	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8570	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8377	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8571	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V
C8378	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8572	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V
C8383	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8573	1-165-875-11	CERAMIC CHIP	10uF 10% 10V
C8384	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8574	1-165-875-11	CERAMIC CHIP	10uF 10% 10V
C8385	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8575	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8386	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8576	1-164-866-11	CERAMIC CHIP	47PF 5% 50V
C8387	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8577	1-164-866-11	CERAMIC CHIP	47PF 5% 50V
C8388	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8805	1-165-676-21	ELECT CHIP	270uF 20% 10V
C8390	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8806	1-165-676-21	ELECT CHIP	270uF 20% 10V
C8391	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8810	1-126-200-11	ELECT CHIP	10uF 20% 35V
C8392	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8814	1-162-966-11	CERAMIC CHIP	0.0022uF 10% 50V
C8393	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8819	1-165-675-21	ELECT CHIP	150uF 20% 10V
C8394	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8821	1-165-908-11	CERAMIC CHIP	1uF 10% 10V
C8395	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8824	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8396	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8825	1-117-681-11	ELECT CHIP	100uF 20% 16V
C8397	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8829	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V
C8398	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V	C8837	1-128-992-21	ELECT CHIP	47uF 20% 25V
C8405	1-112-777-11	CERAMIC CHIP	0.01uF 10% 25V	C8839	1-100-597-91	CERAMIC CHIP	0.1uF 10% 25V
C8406	1-107-819-11	CERAMIC CHIP	0.022uF 10% 16V	C8841	1-128-992-21	ELECT CHIP	47uF 20% 25V
C8407	1-162-968-11	CERAMIC CHIP	0.0047uF 10% 50V	C8843	1-100-597-91	CERAMIC CHIP	0.1uF 10% 25V
C8408	1-164-939-11	CERAMIC CHIP	0.0022uF 10% 50V	C8845	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C8409	1-128-996-11	ELECT CHIP	4.7uF 20% 50V	C8847	1-128-991-21	ELECT CHIP	10uF 20% 50V
C8414	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8848	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C8415	1-128-992-21	ELECT CHIP	47uF 20% 25V	C8854	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C8416	1-128-992-21	ELECT CHIP	47uF 20% 25V	C8855	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C8424	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8856	1-100-566-91	CERAMIC CHIP	0.1uF 10% 25V
C8425	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C8857	1-100-566-91	CERAMIC CHIP	0.1uF 10% 25V
C8427	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V				

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
C8858	1-127-820-11	CERAMIC CHIP	4.7uF 10% 16V	C9393	1-117-681-11	ELECT CHIP	100uF 20% 16V
C8859	1-127-820-11	CERAMIC CHIP	4.7uF 10% 16V	C9394	1-124-779-00	ELECT CHIP	10uF 20% 16V
C8860	1-127-760-11	CERAMIC CHIP	4.7uF 10% 6.3V	C9395	1-124-779-00	ELECT CHIP	10uF 20% 16V
C8863	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	C9405	1-112-672-81	CERAMIC CHIP	330PF 5% 50V
C8864	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	C9406	1-112-672-81	CERAMIC CHIP	330PF 5% 50V
C8865	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C9407	1-112-672-81	CERAMIC CHIP	330PF 5% 50V
C8866	1-164-870-11	CERAMIC CHIP	68PF 5% 50V	C9408	1-112-672-81	CERAMIC CHIP	330PF 5% 50V
C8868	1-115-416-11	CERAMIC CHIP	0.001uF 5% 25V	C9410	1-164-858-11	CERAMIC CHIP	22PF 5% 50V
C8869	1-165-676-21	ELECT CHIP	270uF 20% 10V	C9411	1-164-858-11	CERAMIC CHIP	22PF 5% 50V
C8870	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C9412	1-164-858-11	CERAMIC CHIP	22PF 5% 50V
C8871	1-117-681-11	ELECT CHIP	100uF 20% 16V	C9413	1-164-858-11	CERAMIC CHIP	22PF 5% 50V
C8872	1-164-939-11	CERAMIC CHIP	0.0022uF 10% 50V	C9414	1-164-858-11	CERAMIC CHIP	22PF 5% 50V
C8873	1-164-935-11	CERAMIC CHIP	470PF 10% 50V	C9415	1-164-858-11	CERAMIC CHIP	22PF 5% 50V
C9301	1-128-992-21	ELECT CHIP	47uF 20% 25V	C9416	1-165-908-11	CERAMIC CHIP	1uF 10% 10V
C9308	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9601	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9310	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9602	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C9314	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9603	1-124-779-00	ELECT CHIP	10uF 20% 16V
C9320	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9610	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9323	1-128-992-21	ELECT CHIP	47uF 20% 25V	C9617	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9324	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9618	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C9325	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9619	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9329	1-162-905-11	CERAMIC CHIP	1PF 0.25PF50V	C9624	1-128-357-11	ELECT CHIP	10uF 20% 16V
C9330	1-162-905-11	CERAMIC CHIP	1PF 0.25PF50V	C9625	1-128-357-11	ELECT CHIP	10uF 20% 16V
C9331	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9628	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9332	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9629	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V
C9333	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9630	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9334	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	C9633	1-124-779-00	ELECT CHIP	10uF 20% 16V
C9335	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9638	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9336	1-128-992-21	ELECT CHIP	47uF 20% 25V	C9639	1-124-779-00	ELECT CHIP	10uF 20% 16V
C9337	1-127-715-91	CERAMIC CHIP	0.22uF 10% 16V	C9640	1-128-357-11	ELECT CHIP	10uF 20% 16V
C9338	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	C9641	1-128-357-11	ELECT CHIP	10uF 20% 16V
C9339	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9642	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V
C9342	1-112-777-11	CERAMIC CHIP	0.01uF 10% 25V	C9643	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9343	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9645	1-164-933-11	CERAMIC CHIP	220PF 10% 50V
C9344	1-127-715-91	CERAMIC CHIP	0.22uF 10% 16V	C9646	1-164-933-11	CERAMIC CHIP	220PF 10% 50V
C9345	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9647	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C9346	1-127-820-11	CERAMIC CHIP	4.7uF 10% 16V	C9678	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V
C9347	1-127-820-11	CERAMIC CHIP	4.7uF 10% 16V	C9679	1-112-064-11	CERAMIC CHIP	2.2uF 10% 10V
C9351	1-164-874-11	CERAMIC CHIP	100PF 5% 50V	C9800	1-128-357-11	ELECT CHIP	10uF 20% 16V
C9352	1-128-992-21	ELECT CHIP	47uF 20% 25V	C9801	1-128-357-11	ELECT CHIP	10uF 20% 16V
C9354	1-127-715-91	CERAMIC CHIP	0.22uF 10% 16V	C9802	1-164-935-11	CERAMIC CHIP	470PF 10% 50V
C9357	1-112-777-11	CERAMIC CHIP	0.01uF 10% 25V	C9803	1-164-933-11	CERAMIC CHIP	220PF 10% 50V
C9358	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9804	1-164-933-11	CERAMIC CHIP	220PF 10% 50V
C9359	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9805	1-164-935-11	CERAMIC CHIP	470PF 10% 50V
C9360	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9808	1-164-874-11	CERAMIC CHIP	100PF 5% 50V
C9361	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9809	1-164-874-11	CERAMIC CHIP	100PF 5% 50V
C9365	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9810	1-128-992-21	ELECT CHIP	47uF 20% 25V
C9366	1-128-992-21	ELECT CHIP	47uF 20% 25V	C9811	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V
C9369	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9812	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C9370	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9814	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9371	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	C9816	1-124-779-00	ELECT CHIP	10uF 20% 16V
C9373	1-117-681-11	ELECT CHIP	100uF 20% 16V	C9818	1-128-992-21	ELECT CHIP	47uF 20% 25V
C9374	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V	C9819	1-124-779-00	ELECT CHIP	10uF 20% 16V
C9375	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9821	1-128-992-21	ELECT CHIP	47uF 20% 25V
C9376	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9822	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V
C9377	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9829	1-126-399-11	ELECT CHIP	10uF 20% 35V
C9378	1-117-681-11	ELECT CHIP	100uF 20% 16V	C9830	1-128-595-11	ELECT CHIP	2.2uF 20% 50V
C9380	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C9831	1-128-595-11	ELECT CHIP	2.2uF 20% 50V
C9382	1-128-357-11	ELECT CHIP	10uF 20% 16V	C9832	1-126-395-11	ELECT CHIP	22uF 20% 16V
C9383	1-128-357-11	ELECT CHIP	10uF 20% 16V	C9833	1-126-395-11	ELECT CHIP	22uF 20% 16V
C9386	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9834	1-126-394-11	ELECT CHIP	10uF 20% 16V
C9387	1-124-779-00	ELECT CHIP	10uF 20% 16V	C9835	1-117-681-11	ELECT CHIP	100uF 20% 16V
C9392	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	C9836	1-162-965-11	CERAMIC CHIP	0.0015uF 10% 50V

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
C9837	1-164-217-11	CERAMIC CHIP	150PF 5% 50V			< DIODE >	
C9838	1-164-217-11	CERAMIC CHIP	150PF 5% 50V				
C9839	1-162-965-11	CERAMIC CHIP	0.0015uF 10% 50V	D8003	6-500-334-01	DIODE MC2836-T112-1	
C9840	1-162-965-11	CERAMIC CHIP	0.0015uF 10% 50V	D8004	6-500-335-01	DIODE MC2838-T112-1	
C9841	1-164-217-11	CERAMIC CHIP	150PF 5% 50V	D8005	6-500-334-01	DIODE MC2836-T112-1	
C9842	1-164-217-11	CERAMIC CHIP	150PF 5% 50V	D8006	8-719-056-83	DIODE Udz-TE-17-6.8B	
C9843	1-162-965-11	CERAMIC CHIP	0.0015uF 10% 50V	D8007	8-719-977-28	DIODE DTZ10B	
C9844	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	D8012	6-500-335-01	DIODE MC2838-T112-1	
C9845	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	D8013	6-500-334-01	DIODE MC2836-T112-1	
C9846	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	D8014	6-500-335-01	DIODE MC2838-T112-1	
C9847	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	D8015	8-719-036-94	DIODE RD5.6SB-T1	
C9848	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	D8016	8-719-036-94	DIODE RD5.6SB-T1	
C9849	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	D8017	8-719-036-94	DIODE RD5.6SB-T1	
C9850	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	D8018	8-719-036-94	DIODE RD5.6SB-T1	
C9851	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	D8019	6-500-335-01	DIODE MC2838-T112-1	
C9852	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	D8020	8-719-036-94	DIODE RD5.6SB-T1	
C9853	1-163-009-91	CERAMIC CHIP	0.001uF 10% 50V	D8307	8-719-036-94	DIODE RD5.6SB-T1	
C9854	1-163-009-91	CERAMIC CHIP	0.001uF 10% 50V	D8308	8-719-036-94	DIODE RD5.6SB-T1	
C9855	1-163-009-91	CERAMIC CHIP	0.001uF 10% 50V	D8309	8-719-036-94	DIODE RD5.6SB-T1	
C9856	1-163-009-91	CERAMIC CHIP	0.001uF 10% 50V	D8310	8-719-036-94	DIODE RD5.6SB-T1	
C9857	1-165-585-21	ELECT CHIP	47uF 20% 25V	D8311	8-719-977-28	DIODE DTZ10B	
C9858	1-165-585-21	ELECT CHIP	47uF 20% 25V	D8312	8-719-977-28	DIODE DTZ10B	
C9859	1-165-585-21	ELECT CHIP	47uF 20% 25V	D8313	8-719-036-94	DIODE RD5.6SB-T1	
C9860	1-165-585-21	ELECT CHIP	47uF 20% 25V	D8314	8-719-977-28	DIODE DTZ10B	
C9861	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	D8315	8-719-977-28	DIODE DTZ10B	
C9862	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	D8316	8-719-977-28	DIODE DTZ10B	
C9863	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	D8317	8-719-977-28	DIODE DTZ10B	
C9864	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	D8318	8-719-977-28	DIODE DTZ10B	
C9866	1-131-702-11	FILM	0.68uF 5% 50V	D8319	8-719-977-28	DIODE DTZ10B	
C9867	1-131-702-11	FILM	0.68uF 5% 50V	D8320	8-719-069-55	DIODE UDZSTE-175.6B	
C9868	1-131-702-11	FILM	0.68uF 5% 50V	D8321	8-719-069-55	DIODE UDZSTE-175.6B	
C9869	1-131-702-11	FILM	0.68uF 5% 50V	D8322	8-719-069-55	DIODE UDZSTE-175.6B	
C9870	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	D8323	8-719-069-55	DIODE UDZSTE-175.6B	
C9871	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	D8324	8-719-069-55	DIODE UDZSTE-175.6B	
C9872	1-163-275-11	CERAMIC CHIP	0.001uF 5% 50V	D8325	8-719-069-55	DIODE UDZSTE-175.6B	
C9873	1-163-275-11	CERAMIC CHIP	0.001uF 5% 50V	D8328	6-500-335-01	DIODE MC2838-T112-1	
C9876	1-163-275-11	CERAMIC CHIP	0.001uF 5% 50V	D8329	6-500-335-01	DIODE MC2838-T112-1	
C9877	1-163-275-11	CERAMIC CHIP	0.001uF 5% 50V	D8330	6-500-334-01	DIODE MC2836-T112-1	
C9878	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	D8570	8-719-036-94	DIODE RD5.6SB-T1	
C9879	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	D8571	8-719-036-94	DIODE RD5.6SB-T1	
C9880	1-128-992-21	ELECT CHIP	47uF 20% 25V	D8572	8-719-036-94	DIODE RD5.6SB-T1	
C9882	1-163-009-91	CERAMIC CHIP	0.001uF 10% 50V	D8573	8-719-977-28	DIODE DTZ10B	
C9883	1-163-009-91	CERAMIC CHIP	0.001uF 10% 50V	D8574	6-500-334-01	DIODE MC2836-T112-1	
C9884	1-163-009-91	CERAMIC CHIP	0.001uF 10% 50V	D8575	6-500-335-01	DIODE MC2838-T112-1	
C9885	1-163-009-91	CERAMIC CHIP	0.001uF 10% 50V	D8576	8-719-977-28	DIODE DTZ10B	
C9887	1-112-030-31	ELECT	1500uF 20% 35V	D8577	6-500-335-01	DIODE MC2838-T112-1	
C9888	1-112-030-31	ELECT	1500uF 20% 35V	D8583	8-719-045-61	DIODE SEC1901C	
C9891	1-124-779-00	ELECT CHIP	10uF 20% 16V	D8801	8-719-073-69	DIODE PTZ-TE25-6.2A	
C9899	1-128-357-11	ELECT CHIP	10uF 20% 16V	D8802	8-719-056-83	DIODE Udz-TE-17-6.8B	
C9902	1-128-992-21	ELECT CHIP	47uF 20% 25V	D8803	6-500-527-01	DIODE EC21QS04-TE12L	
C9903	1-100-916-11	CERAMIC CHIP	0.1uF 10% 16V	D8809	6-500-335-01	DIODE MC2838-T112-1	
C9904	1-137-987-81	CERAMIC CHIP	0.068uF 10% 10V	D8811	6-500-335-01	DIODE MC2838-T112-1	
C9905	1-127-715-91	CERAMIC CHIP	0.22uF 10% 16V	D8812	8-719-078-04	DIODE EC31QS03L-TE12L	
C9906	1-124-779-00	ELECT CHIP	10uF 20% 16V	D8813	6-500-019-01	DIODE MM3Z3V9ST1	
C9907	1-126-394-11	ELECT CHIP	10uF 20% 16V	D9301	6-500-335-01	DIODE MC2838-T112-1	
C9913	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D9311	6-500-334-01	DIODE MC2836-T112-1	
C9914	1-100-566-91	CERAMIC CHIP	0.1uF 10% 25V	D9316	6-500-335-01	DIODE MC2838-T112-1	
		< CONNECTOR >		D9317	6-500-334-01	DIODE MC2836-T112-1	
CN8570	1-820-564-11	D SUB CONNECTOR		D9318	6-500-334-01	DIODE MC2836-T112-1	
CN9800*	1-580-838-11	PIN, CONNECTOR (PC BOARD) 4P		D9601	6-500-335-01	DIODE MC2838-T112-1	
				D9602	6-500-335-01	DIODE MC2838-T112-1	
				D9603	6-500-335-01	DIODE MC2838-T112-1	
				D9805	8-719-048-98	DIODE RB160L-40TE25	
				D9806	8-719-048-98	DIODE RB160L-40TE25	

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
D9807	8-719-048-98	DIODE RB160L-40TE25		FB9311	1-469-080-11	INDUCTOR, FERRITE BEAD (1005)	
D9808	8-719-048-98	DIODE RB160L-40TE25					
D9814	6-500-335-01	DIODE MC2838-T112-1		FB9312	1-469-080-11	INDUCTOR, FERRITE BEAD (1005)	
				FB9313	1-469-080-11	INDUCTOR, FERRITE BEAD (1005)	
D9815	6-500-334-01	DIODE MC2836-T112-1		FB9314	1-469-080-11	INDUCTOR, FERRITE BEAD (1005)	
D9816	6-500-334-01	DIODE MC2836-T112-1		FB9801	1-400-089-21	INDUCTOR (EMI FERRITE) (2012)	
D9819	8-719-048-98	DIODE RB160L-40TE25		FB9802	1-400-089-21	INDUCTOR (EMI FERRITE) (2012)	
D9820	8-719-048-98	DIODE RB160L-40TE25					
D9821	8-719-048-98	DIODE RB160L-40TE25		FB9803	1-400-089-21	INDUCTOR (EMI FERRITE) (2012)	
				FB9804	1-400-089-21	INDUCTOR (EMI FERRITE) (2012)	
D9822	8-719-048-98	DIODE RB160L-40TE25				< FILTER >	
		< FUSE >		FL8000	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
F8570	1-576-519-21	FUSE 400MA 32V		FL8001	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
F8800	1-576-603-21	FUSE 3.15A 24V		FL8800	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
F8801	1-576-603-21	FUSE 3.15A 24V		FL8801	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
F8802	1-576-603-21	FUSE 3.15A 24V		FL8804	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
F9800	1-576-774-21	FUSE 6.3A 72V					
F9801	1-533-606-41	IC LINK 0.5A 24V		FL8805	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
		< FERRITE BEAD >		FL8806	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
				FL8807	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB8000	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		FL8808	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB8001	1-414-445-11	BEAD, FERRITE (CHIP) (1608)				< IC >	
FB8002	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC8000	6-709-901-01	IC MM3121JPLE	
FB8003	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC8001	6-705-373-01	IC MM3123DPLE	
FB8004	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC8004	6-704-067-01	IC M24128-BWMN6T (A)	
				IC8005	6-703-175-01	IC PST3629UL	
FB8005	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC8006	6-703-589-01	IC SN74LVC1G125DCKR	
FB8006	1-414-445-11	BEAD, FERRITE (CHIP) (1608)					
FB8008	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC8007	8-759-066-55	IC TA75W393FU	
FB8009	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC8008	6-703-175-01	IC PST3629UL	
FB8303	1-400-833-21	SMD EMI FERRITE		IC8009	6-708-758-01	IC PCA9517DP.118	
				IC8301	8-753-274-33	IC CXA2239AR-TL	
FB8305	1-400-833-21	SMD EMI FERRITE		IC8302	6-709-777-01	IC ADA4861-3YRZ-RL7	
FB8306	1-400-833-21	SMD EMI FERRITE					
FB8307	1-400-833-21	SMD EMI FERRITE		IC8304	6-700-631-01	IC TPS2051ADR	
FB8308	1-400-833-21	SMD EMI FERRITE		IC8504	6-703-176-01	IC PST3627UL	
FB8309	1-400-833-21	SMD EMI FERRITE		IC8505	6-804-648-01	IC MB90F334APMC-GE1	
				IC8506	6-704-067-01	IC M24128-BWMN6T (A)	
FB8310	1-400-833-21	SMD EMI FERRITE		IC8507	8-759-679-05	IC TC7WH34FU (TE12R)	
FB8311	1-400-089-21	INDUCTOR (EMI FERRITE) (2012)					
FB8312	1-400-089-21	INDUCTOR (EMI FERRITE) (2012)		IC8570	6-704-600-01	IC M24C02-WMN6T (B)	
FB8313	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC8572 *	6-703-107-01	IC SN74LVC2G66DCUR	
FB8314	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC8573 *	6-703-107-01	IC SN74LVC2G66DCUR	
				IC8801	6-704-407-01	IC PQ1CZ41H2ZPH	
FB8315	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC8802	6-708-762-01	IC PQ200WNA1ZPH	
FB8316	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)					
FB8500	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC8804	8-752-072-94	IC CXA1875AM-T4	
FB8501	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC8805	6-707-023-01	IC BD9850FVM-E2	
FB8502	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC9301	6-704-353-01	IC SN74LVC2G34DCKR	
				IC9303	8-759-592-45	IC TC7SZU04FU (TE85R)	
FB8503	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC9304	6-709-040-11	IC MAP4400A-QA-B2-501-T	
FB8504	1-414-445-11	BEAD, FERRITE (CHIP) (1608)					
FB8570	1-400-833-21	SMD EMI FERRITE		IC9305	6-706-536-01	IC CXD9826R	
FB8571	1-400-833-21	SMD EMI FERRITE		IC9306	6-706-907-01	IC M5M51008DFP-70H	
FB8572	1-400-833-21	SMD EMI FERRITE		IC9307	8-759-183-53	IC TL431CPK-E2	
				IC9308	8-759-278-58	IC NJM4558V-TE2	
FB8573	1-400-833-21	SMD EMI FERRITE		IC9400	6-707-151-01	IC SN74AHCT244PWR	
FB8802	1-414-921-11	INDUCTOR, FERRITE BEAD					
FB8803	1-414-921-11	INDUCTOR, FERRITE BEAD		IC9602	8-752-107-98	IC CXA2188Q-T4	
FB8804	1-414-921-11	INDUCTOR, FERRITE BEAD		IC9606	8-759-278-58	IC NJM4558V-TE2	
FB8806	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC9802	8-759-278-58	IC NJM4558V-TE2	
				IC9803	8-759-700-07	IC NJM2903M	
FB9300	1-414-234-22	INDUCTOR, FERRITE BEAD		IC9804	6-709-285-01	IC M61571AFP-DF0T	
FB9301	1-414-921-11	INDUCTOR, FERRITE BEAD					
FB9303	1-414-921-11	INDUCTOR, FERRITE BEAD		IC9805	8-759-183-53	IC TL431CPK-E2	
FB9304	1-414-921-11	INDUCTOR, FERRITE BEAD		IC9807	8-759-278-58	IC NJM4558V-TE2	
FB9305	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		IC9809	8-759-700-07	IC NJM2903M	
						< JACK >	
FB9306	1-414-921-11	INDUCTOR, FERRITE BEAD		J8301	1-819-357-11	PHONO JACK 10P	
FB9308	1-414-921-11	INDUCTOR, FERRITE BEAD		J8570	1-691-293-21	JACK	
FB9309	1-469-080-11	INDUCTOR, FERRITE BEAD (1005)					
FB9310	1-469-080-11	INDUCTOR, FERRITE BEAD (1005)					



REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
		< COIL >					
L8000	1-469-555-21	INDUCTOR	10uH	Q8027	8-729-600-22	TRANSISTOR 2SA1235-F	
L8001	1-469-555-21	INDUCTOR	10uH	Q8032	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8002	1-469-555-21	INDUCTOR	10uH	Q8033	8-729-600-22	TRANSISTOR 2SA1235-F	
L8003	1-469-555-21	INDUCTOR	10uH	Q8034	8-729-600-22	TRANSISTOR 2SA1235-F	
L8004	1-469-549-21	INDUCTOR	1uH	Q8300	8-729-600-22	TRANSISTOR 2SA1235-F	
L8300	1-469-555-21	INDUCTOR	10uH	Q8301	8-729-600-22	TRANSISTOR 2SA1235-F	
L8301	1-469-555-21	INDUCTOR	10uH	Q8305	8-729-122-63	TRANSISTOR 2SA1226-E4	
L8302	1-469-555-21	INDUCTOR	10uH	Q8306	8-729-122-63	TRANSISTOR 2SA1226-E4	
L8303	1-469-555-21	INDUCTOR	10uH	Q8307	8-729-122-63	TRANSISTOR 2SA1226-E4	
L8304	1-469-555-21	INDUCTOR	10uH	Q8308	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8306	1-469-555-21	INDUCTOR	10uH	Q8309	8-729-600-22	TRANSISTOR 2SA1235-F	
L8307	1-469-555-21	INDUCTOR	10uH	Q8311	8-729-600-22	TRANSISTOR 2SA1235-F	
L8308	1-469-555-21	INDUCTOR	10uH	Q8313	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8309	1-469-555-21	INDUCTOR	10uH	Q8314	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8311	1-469-555-21	INDUCTOR	10uH	Q8315	8-729-600-22	TRANSISTOR 2SA1235-F	
L8312	1-400-180-21	INDUCTOR, EMI FERRITE (1608)		Q8316	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8314	1-400-180-21	INDUCTOR, EMI FERRITE (1608)		Q8317	8-729-600-22	TRANSISTOR 2SA1235-F	
L8315	1-400-180-21	INDUCTOR, EMI FERRITE (1608)		Q8318	8-729-600-22	TRANSISTOR 2SA1235-F	
L8316	1-400-178-21	INDUCTOR, EMI FERRITE (1608)		Q8319	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8318	1-412-058-11	INDUCTOR	10uH	Q8327	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8319	1-469-555-21	INDUCTOR	10uH	Q8328	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8320	1-469-555-21	INDUCTOR	10uH	Q8330	6-551-390-01	TRANSISTOR RT1A3906-T122-1	
L8800	1-416-740-11	INDUCTOR	10uH	Q8503	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8805	1-481-081-11	INDUCTOR	47uH	Q8505	6-550-014-01	TRANSISTOR SSM6N15FU (TE85R)	
L8808	1-416-740-11	INDUCTOR	10uH	Q8506	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8809	1-416-740-11	INDUCTOR	10uH	Q8570	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L8810	1-400-180-21	INDUCTOR, EMI FERRITE (1608)		Q8577	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9302	1-469-555-21	INDUCTOR	10uH	Q8578	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9303	1-412-058-11	INDUCTOR	10uH	Q8801	6-550-354-01	TRANSISTOR RTQ035P02TR	
L9304	1-469-555-21	INDUCTOR	10uH	Q8802	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9601	1-412-058-11	INDUCTOR	10uH	Q8804	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9604	1-412-058-11	INDUCTOR	10uH	Q8816	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9606	1-469-555-21	INDUCTOR	10uH	Q8817	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9607	1-469-555-21	INDUCTOR	10uH	Q8819	6-551-382-01	TRANSISTOR RSS040P03FD5TB	
L9801	1-412-058-11	INDUCTOR	10uH	Q8820	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9802	1-412-058-11	INDUCTOR	10uH	Q8821	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9803	1-419-353-21	INDUCTOR	10uH	Q9300	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9804	1-412-058-11	INDUCTOR	10uH	Q9303	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9805	1-424-976-21	INDUCTOR	47uH	Q9305	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9806	1-456-864-11	INDUCTOR	11uH	Q9310	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9807	1-456-864-11	INDUCTOR	11uH	Q9311	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9808	1-412-058-11	INDUCTOR	10uH	Q9314	8-729-600-22	TRANSISTOR 2SA1235-F	
L9809	1-412-058-11	INDUCTOR	10uH	Q9315	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9811	1-456-864-11	INDUCTOR	11uH	Q9316	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L9812	1-456-864-11	INDUCTOR	11uH	Q9601	8-729-600-22	TRANSISTOR 2SA1235-F	
		< TRANSISTOR >		Q9602	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8006	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9604	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8007	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9608	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8008	8-729-600-22	TRANSISTOR 2SA1235-F		Q9610	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8009	8-729-600-22	TRANSISTOR 2SA1235-F		Q9613	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8010	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9614	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8012	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9800	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8013	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9803	8-729-600-22	TRANSISTOR 2SA1235-F	
Q8014	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9806	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8015	6-550-014-01	TRANSISTOR SSM6N15FU (TE85R)		Q9809	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q8020	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9810	8-729-600-22	TRANSISTOR 2SA1235-F	
Q8021	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9811	8-729-600-22	TRANSISTOR 2SA1235-F	
Q8022	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9812	8-729-600-22	TRANSISTOR 2SA1235-F	
Q8023	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9813	8-729-600-22	TRANSISTOR 2SA1235-F	
Q8024	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9814	8-729-600-22	TRANSISTOR 2SA1235-F	
Q8025	8-729-120-28	TRANSISTOR 2SC1623-L5L6		Q9815	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
				Q9816	8-729-921-80	TRANSISTOR 2SD1781K-T146-QR	
				Q9818	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
				Q9819	8-729-600-22	TRANSISTOR 2SA1235-F	

A1

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
Q9820	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R8105	1-218-937-11	RES-CHIP	47 5% 1/16W
		< RESISTOR >		R8107	1-218-990-81	SHORT CHIP	0
R8000	1-218-933-81	RES-CHIP	22 5% 1/16W	R8111	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8001	1-218-933-81	RES-CHIP	22 5% 1/16W	R8112	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8002	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8113	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8003	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8116	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8004	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8117	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8005	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8118	1-218-937-11	RES-CHIP	47 5% 1/16W
R8006	1-218-959-11	RES-CHIP	3.3K 5% 1/16W	R8119	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8007	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8120	1-218-937-11	RES-CHIP	47 5% 1/16W
R8008	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8121	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8009	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8122	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8010	1-218-968-11	RES-CHIP	18K 5% 1/16W	R8123	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8028	1-218-937-11	RES-CHIP	47 5% 1/16W	R8124	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8029	1-218-937-11	RES-CHIP	47 5% 1/16W	R8126	1-218-990-81	SHORT CHIP	0
R8030	1-218-937-11	RES-CHIP	47 5% 1/16W	R8127	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8031	1-218-937-11	RES-CHIP	47 5% 1/16W	R8128	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8032	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8129	1-218-937-11	RES-CHIP	47 5% 1/16W
R8033	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8130	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8034	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8132	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8035	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8133	1-218-937-11	RES-CHIP	47 5% 1/16W
R8036	1-218-937-11	RES-CHIP	47 5% 1/16W	R8134	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8037	1-218-937-11	RES-CHIP	47 5% 1/16W	R8135	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8039	1-218-937-11	RES-CHIP	47 5% 1/16W	R8137	1-218-937-11	RES-CHIP	47 5% 1/16W
R8040	1-218-990-81	SHORT CHIP	0	R8138	1-218-941-81	RES-CHIP	100 5% 1/16W
R8041	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8139	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8043	1-218-937-11	RES-CHIP	47 5% 1/16W	R8140	1-218-937-11	RES-CHIP	47 5% 1/16W
R8045	1-218-937-11	RES-CHIP	47 5% 1/16W	R8141	1-218-933-11	RES-CHIP	22 5% 1/16W
R8046	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8142	1-218-937-11	RES-CHIP	47 5% 1/16W
R8049	1-218-949-11	RES-CHIP	470 5% 1/16W	R8143	1-218-937-11	RES-CHIP	47 5% 1/16W
R8050	1-218-937-11	RES-CHIP	47 5% 1/16W	R8144	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8051	1-218-937-11	RES-CHIP	47 5% 1/16W	R8145	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8052	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8146	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R8054	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8147	1-218-989-11	RES-CHIP	1M 5% 1/16W
R8056	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8148	1-218-937-11	RES-CHIP	47 5% 1/16W
R8058	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8149	1-218-937-11	RES-CHIP	47 5% 1/16W
R8060	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8150	1-218-937-11	RES-CHIP	47 5% 1/16W
R8065	1-218-990-81	SHORT CHIP	0	R8151	1-218-937-11	RES-CHIP	47 5% 1/16W
R8066	1-208-695-11	METAL CHIP	3.3K 0.50% 1/16W	R8152	1-218-949-11	RES-CHIP	470 5% 1/16W
R8067	1-208-869-11	METAL CHIP	180 0.50% 1/16W	R8153	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R8068	1-208-671-11	METAL CHIP	330 0.50% 1/16W	R8154	1-218-990-81	SHORT CHIP	0
R8069	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8155	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8070	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8156	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8072	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8158	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8074	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8159	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8078	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8160	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8081	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8161	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8082	1-218-937-11	RES-CHIP	47 5% 1/16W	R8162	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R8083	1-218-937-11	RES-CHIP	47 5% 1/16W	R8164	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8084	1-218-937-11	RES-CHIP	47 5% 1/16W	R8165	1-218-937-11	RES-CHIP	47 5% 1/16W
R8085	1-218-937-11	RES-CHIP	47 5% 1/16W	R8166	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8086	1-218-937-11	RES-CHIP	47 5% 1/16W	R8167	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8087	1-218-937-11	RES-CHIP	47 5% 1/16W	R8168	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8088	1-218-937-11	RES-CHIP	47 5% 1/16W	R8169	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8089	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8170	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8090	1-218-937-11	RES-CHIP	47 5% 1/16W	R8171	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8094	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8172	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8096	1-218-973-11	RES-CHIP	47K 5% 1/16W	R8173	1-218-977-11	RES-CHIP	100K 5% 1/16W
R8097	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8177	1-218-990-81	SHORT CHIP	0
R8101	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8178	1-218-990-81	SHORT CHIP	0
R8102	1-208-675-11	METAL CHIP	470 0.50% 1/16W	R8182	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8104	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8185	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
				R8188	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
				R8189	1-218-969-11	RES-CHIP	22K 5% 1/16W

REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK
R8190	1-218-969-11	RES-CHIP	22K	5%	1/16W	R8302	1-218-941-81	RES-CHIP	100 5% 1/16W
R8191	1-218-953-11	RES-CHIP	1K	5%	1/16W	R8303	1-218-941-81	RES-CHIP	100 5% 1/16W
R8193	1-218-973-11	RES-CHIP	47K	5%	1/16W	R8304	1-216-803-11	METAL CHIP	33 5% 1/10W
R8194	1-208-927-11	METAL CHIP	47K	0.50%	1/16W	R8305	1-218-941-81	RES-CHIP	100 5% 1/16W
R8195	1-208-927-11	METAL CHIP	47K	0.50%	1/16W	R8306	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8196	1-218-990-81	SHORT CHIP	0			R8307	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8197	1-218-973-11	RES-CHIP	47K	5%	1/16W	R8308	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8198	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8309	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8199	1-218-941-81	RES-CHIP	100	5%	1/16W	R8310	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8200	1-218-977-11	RES-CHIP	100K	5%	1/16W	R8311	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8201	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R8312	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8202	1-218-977-11	RES-CHIP	100K	5%	1/16W	R8313	1-218-985-11	RES-CHIP	470K 5% 1/16W
R8203	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R8314	1-218-985-11	RES-CHIP	470K 5% 1/16W
R8204	1-218-941-81	RES-CHIP	100	5%	1/16W	R8315	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8205	1-218-941-81	RES-CHIP	100	5%	1/16W	R8316	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8206	1-218-941-81	RES-CHIP	100	5%	1/16W	R8317	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8207	1-218-941-81	RES-CHIP	100	5%	1/16W	R8318	1-218-985-11	RES-CHIP	470K 5% 1/16W
R8209	1-218-953-11	RES-CHIP	1K	5%	1/16W	R8319	1-218-985-11	RES-CHIP	470K 5% 1/16W
R8211	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8320	1-218-937-11	RES-CHIP	47 5% 1/16W
R8212	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8321	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8213	1-218-969-11	RES-CHIP	22K	5%	1/16W	R8322	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8214	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8323	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8215	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R8324	1-218-985-11	RES-CHIP	470K 5% 1/16W
R8216	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8325	1-218-985-11	RES-CHIP	470K 5% 1/16W
R8217	1-218-969-11	RES-CHIP	22K	5%	1/16W	R8326	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8218	1-218-971-11	RES-CHIP	33K	5%	1/16W	R8327	1-218-985-11	RES-CHIP	470K 5% 1/16W
R8219	1-218-989-11	RES-CHIP	1M	5%	1/16W	R8328	1-218-985-11	RES-CHIP	470K 5% 1/16W
R8220	1-218-989-11	RES-CHIP	1M	5%	1/16W	R8329	1-218-937-11	RES-CHIP	47 5% 1/16W
R8221	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8330	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8233	1-218-990-81	SHORT CHIP	0			R8331	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8234	1-218-990-81	SHORT CHIP	0			R8332	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8235	1-218-990-81	SHORT CHIP	0			R8333	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8236	1-218-990-81	SHORT CHIP	0			R8334	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8237	1-218-990-81	SHORT CHIP	0			R8335	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8238	1-218-990-81	SHORT CHIP	0			R8336	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8239	1-218-990-81	SHORT CHIP	0			R8337	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8240	1-218-990-81	SHORT CHIP	0			R8338	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8241	1-218-990-81	SHORT CHIP	0			R8339	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8242	1-218-990-81	SHORT CHIP	0			R8340	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8257	1-218-937-11	RES-CHIP	47	5%	1/16W	R8341	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8258	1-218-990-81	SHORT CHIP	0			R8342	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8259	1-218-990-81	SHORT CHIP	0			R8343	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8260	1-218-990-81	SHORT CHIP	0			R8344	1-216-797-11	METAL CHIP	10 5% 1/10W
R8264	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8345	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8265	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8346	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8266	1-218-973-11	RES-CHIP	47K	5%	1/16W	R8347	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8267	1-218-973-11	RES-CHIP	47K	5%	1/16W	R8348	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8268	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R8349	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8269	1-218-990-81	SHORT CHIP	0			R8350	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8270	1-218-937-11	RES-CHIP	47	5%	1/16W	R8351	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8271	1-218-937-11	RES-CHIP	47	5%	1/16W	R8352	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8274	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8353	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8276	1-218-990-81	SHORT CHIP	0			R8354	1-216-797-11	METAL CHIP	10 5% 1/10W
R8279	1-218-990-81	SHORT CHIP	0			R8355	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8281	1-218-990-81	SHORT CHIP	0			R8356	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8282	1-218-990-81	SHORT CHIP	0			R8357	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8283	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8358	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8284	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R8359	1-216-797-11	METAL CHIP	10 5% 1/10W
R8285	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R8360	1-218-990-81	SHORT CHIP	0
R8288	1-218-933-81	RES-CHIP	22	5%	1/16W	R8361	1-218-990-81	SHORT CHIP	0
R8289	1-218-933-81	RES-CHIP	22	5%	1/16W	R8367	1-218-990-81	SHORT CHIP	0
R8300	1-218-941-81	RES-CHIP	100	5%	1/16W	R8368	1-218-941-81	RES-CHIP	100 5% 1/16W
R8301	1-218-990-81	SHORT CHIP	0			R8369	1-218-937-11	RES-CHIP	47 5% 1/16W

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R8370	1-218-937-11	RES-CHIP	47 5% 1/16W	R8445	1-218-941-81	RES-CHIP	100 5% 1/16W
R8371	1-218-990-81	SHORT CHIP	0	R8446	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8372	1-218-941-81	RES-CHIP	100 5% 1/16W	R8447	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8373	1-218-941-81	RES-CHIP	100 5% 1/16W	R8448	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8374	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R8449	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8375	1-218-941-81	RES-CHIP	100 5% 1/16W	R8450	1-218-958-11	RES-CHIP	2.7K 5% 1/16W
R8376	1-208-683-11	METAL CHIP	1K 0.50% 1/16W	R8451	1-218-960-11	RES-CHIP	3.9K 5% 1/16W
R8377	1-218-941-81	RES-CHIP	100 5% 1/16W	R8452	1-218-989-11	RES-CHIP	1M 5% 1/16W
R8378	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R8453	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8379	1-218-937-11	RES-CHIP	47 5% 1/16W	R8454	1-218-941-81	RES-CHIP	100 5% 1/16W
R8380	1-218-941-81	RES-CHIP	100 5% 1/16W	R8455	1-218-989-11	RES-CHIP	1M 5% 1/16W
R8381	1-218-937-11	RES-CHIP	47 5% 1/16W	R8458	1-218-941-81	RES-CHIP	100 5% 1/16W
R8382	1-208-699-11	METAL CHIP	4.7K 0.50% 1/16W	R8462	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8383	1-208-929-81	METAL CHIP	56K 0.50% 1/16W	R8463	1-218-941-81	RES-CHIP	100 5% 1/16W
R8384	1-218-990-81	SHORT CHIP	0	R8464	1-218-843-11	METAL CHIP	680 0.50% 1/10W
R8385	1-208-711-11	METAL CHIP	15K 0.50% 1/16W	R8465	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8387	1-208-677-11	METAL CHIP	560 0.50% 1/16W	R8466	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8388	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R8467	1-218-843-11	METAL CHIP	680 0.50% 1/10W
R8389	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R8468	1-218-843-11	METAL CHIP	680 0.50% 1/10W
R8390	1-218-990-81	SHORT CHIP	0	R8471	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8391	1-218-941-81	RES-CHIP	100 5% 1/16W	R8472	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8392	1-218-941-81	RES-CHIP	100 5% 1/16W	R8473	1-218-831-11	METAL CHIP	220 0.50% 1/10W
R8393	1-218-937-11	RES-CHIP	47 5% 1/16W	R8474	1-218-990-81	SHORT CHIP	0
R8394	1-218-937-11	RES-CHIP	47 5% 1/16W	R8475	1-218-990-81	SHORT CHIP	0
R8395	1-218-937-11	RES-CHIP	47 5% 1/16W	R8476	1-218-990-81	SHORT CHIP	0
R8396	1-218-975-11	RES-CHIP	68K 5% 1/16W	R8477	1-218-990-81	SHORT CHIP	0
R8397	1-218-975-11	RES-CHIP	68K 5% 1/16W	R8478	1-218-990-81	SHORT CHIP	0
R8398	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R8479	1-218-990-81	SHORT CHIP	0
R8401	1-218-969-11	RES-CHIP	22K 5% 1/16W	R8480	1-216-864-11	SHORT CHIP	0
R8403	1-218-969-11	RES-CHIP	22K 5% 1/16W	R8484	1-218-990-81	SHORT CHIP	0
R8404	1-218-933-11	RES-CHIP	22 5% 1/16W	R8485	1-218-990-81	SHORT CHIP	0
R8405	1-218-933-11	RES-CHIP	22 5% 1/16W	R8486	1-218-990-81	SHORT CHIP	0
R8406	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	R8487	1-218-941-81	RES-CHIP	100 5% 1/16W
R8407	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8488	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R8409	1-218-989-11	RES-CHIP	1M 5% 1/16W	R8489	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R8410	1-218-983-11	RES-CHIP	330K 5% 1/16W	R8490	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R8411	1-218-983-11	RES-CHIP	330K 5% 1/16W	R8491	1-218-937-11	RES-CHIP	47 5% 1/16W
R8412	1-218-983-11	RES-CHIP	330K 5% 1/16W	R8492	1-218-937-11	RES-CHIP	47 5% 1/16W
R8413	1-218-937-11	RES-CHIP	47 5% 1/16W	R8493	1-218-937-11	RES-CHIP	47 5% 1/16W
R8414	1-208-911-11	METAL CHIP	10K 0.50% 1/16W	R8494	1-218-941-81	RES-CHIP	100 5% 1/16W
R8415	1-218-990-81	SHORT CHIP	0	R8495	1-218-937-11	RES-CHIP	47 5% 1/16W
R8416	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R8496	1-218-937-11	RES-CHIP	47 5% 1/16W
R8419	1-218-937-11	RES-CHIP	47 5% 1/16W	R8497	1-218-941-81	RES-CHIP	100 5% 1/16W
R8420	1-218-953-11	RES-CHIP	1K 5% 1/16W	R8498	1-218-941-81	RES-CHIP	100 5% 1/16W
R8421	1-218-941-81	RES-CHIP	100 5% 1/16W	R8499	1-218-937-11	RES-CHIP	47 5% 1/16W
R8422	1-218-990-81	SHORT CHIP	0	R8500	1-218-937-11	RES-CHIP	47 5% 1/16W
R8427	1-218-968-11	RES-CHIP	18K 5% 1/16W	R8501	1-218-937-11	RES-CHIP	47 5% 1/16W
R8428	1-220-169-11	RES-CHIP	75 5% 1/16W	R8502	1-218-941-81	RES-CHIP	100 5% 1/16W
R8429	1-220-169-11	RES-CHIP	75 5% 1/16W	R8503	1-218-990-81	SHORT CHIP	0
R8430	1-218-990-81	SHORT CHIP	0	R8505	1-218-941-81	RES-CHIP	100 5% 1/16W
R8431	1-208-691-11	METAL CHIP	2.2K 0.50% 1/16W	R8506	1-218-990-81	SHORT CHIP	0
R8432	1-220-169-11	RES-CHIP	75 5% 1/16W	R8507	1-218-990-81	SHORT CHIP	0
R8433	1-218-941-81	RES-CHIP	100 5% 1/16W	R8511	1-218-937-11	RES-CHIP	47 5% 1/16W
R8434	1-218-968-11	RES-CHIP	18K 5% 1/16W	R8512	1-218-937-11	RES-CHIP	47 5% 1/16W
R8435	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R8513	1-218-937-11	RES-CHIP	47 5% 1/16W
R8436	1-220-169-11	RES-CHIP	75 5% 1/16W	R8514	1-218-937-11	RES-CHIP	47 5% 1/16W
R8437	1-220-169-11	RES-CHIP	75 5% 1/16W	R8515	1-218-937-11	RES-CHIP	47 5% 1/16W
R8438	1-220-169-11	RES-CHIP	75 5% 1/16W	R8516	1-218-937-11	RES-CHIP	47 5% 1/16W
R8439	1-218-941-81	RES-CHIP	100 5% 1/16W	R8517	1-218-937-11	RES-CHIP	47 5% 1/16W
R8440	1-208-941-11	METAL CHIP	180K 0.50% 1/16W	R8520	1-218-937-11	RES-CHIP	47 5% 1/16W
R8441	1-218-941-81	RES-CHIP	100 5% 1/16W	R8521	1-218-937-11	RES-CHIP	47 5% 1/16W
R8442	1-218-941-81	RES-CHIP	100 5% 1/16W	R8522	1-218-937-11	RES-CHIP	47 5% 1/16W
R8443	1-218-941-81	RES-CHIP	100 5% 1/16W	R8525	1-218-937-11	RES-CHIP	47 5% 1/16W
R8444	1-218-941-81	RES-CHIP	100 5% 1/16W				

A1

REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK
R8526	1-218-937-11	RES-CHIP	47	5%	1/16W	R8664	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8527	1-218-937-11	RES-CHIP	47	5%	1/16W	R8665	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8528	1-218-990-81	SHORT CHIP	0			R8666	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8529	1-218-990-81	SHORT CHIP	0			R8667	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8530	1-218-990-81	SHORT CHIP	0			R8668	1-218-977-11	RES-CHIP	100K 5% 1/16W
R8531	1-218-937-11	RES-CHIP	47	5%	1/16W	R8669	1-218-941-81	RES-CHIP	100 5% 1/16W
R8532	1-218-937-11	RES-CHIP	47	5%	1/16W	R8670	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8533	1-218-937-11	RES-CHIP	47	5%	1/16W	R8672	1-218-941-81	RES-CHIP	100 5% 1/16W
R8534	1-218-937-11	RES-CHIP	47	5%	1/16W	R8673	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8535	1-218-937-11	RES-CHIP	47	5%	1/16W	R8675	1-218-941-81	RES-CHIP	100 5% 1/16W
R8536	1-218-937-11	RES-CHIP	47	5%	1/16W	R8676	1-218-941-81	RES-CHIP	100 5% 1/16W
R8537	1-218-937-11	RES-CHIP	47	5%	1/16W	R8679	1-218-990-81	SHORT CHIP	0
R8538	1-218-937-11	RES-CHIP	47	5%	1/16W	R8681	1-218-990-81	SHORT CHIP	0
R8539	1-218-990-81	SHORT CHIP	0			R8682	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8540	1-218-937-11	RES-CHIP	47	5%	1/16W	R8683	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8541	1-218-937-11	RES-CHIP	47	5%	1/16W	R8686	1-218-933-11	RES-CHIP	22 5% 1/16W
R8542	1-218-937-11	RES-CHIP	47	5%	1/16W	R8689	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8543	1-218-937-11	RES-CHIP	47	5%	1/16W	R8691	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8546	1-216-864-11	SHORT CHIP	0			R8692	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8547	1-216-864-11	SHORT CHIP	0			R8693	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8548	1-218-990-81	SHORT CHIP	0			R8694	1-218-977-11	RES-CHIP	100K 5% 1/16W
R8549	1-218-990-81	SHORT CHIP	0			R8696	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8550	1-218-990-81	SHORT CHIP	0			R8697	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8551	1-218-937-11	RES-CHIP	47	5%	1/16W	R8698	1-218-933-11	RES-CHIP	22 5% 1/16W
R8552	1-218-990-81	SHORT CHIP	0			R8699	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8558	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8700	1-218-933-11	RES-CHIP	22 5% 1/16W
R8562	1-218-990-81	SHORT CHIP	0			R8701	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8563	1-218-990-81	SHORT CHIP	0			R8702	1-218-933-11	RES-CHIP	22 5% 1/16W
R8564	1-218-990-81	SHORT CHIP	0			R8703	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8565	1-218-990-81	SHORT CHIP	0			R8704	1-218-933-11	RES-CHIP	22 5% 1/16W
R8567	1-218-941-81	RES-CHIP	100	5%	1/16W	R8706	1-218-933-11	RES-CHIP	22 5% 1/16W
R8568	1-208-683-11	METAL CHIP	1K	0.50%	1/16W	R8707	1-218-933-11	RES-CHIP	22 5% 1/16W
R8570	1-218-983-11	RES-CHIP	330K	5%	1/16W	R8709	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8571	1-218-990-81	SHORT CHIP	0			R8710	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8572	1-218-990-81	SHORT CHIP	0			R8712	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R8577	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8713	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R8578	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8715	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8584	1-218-945-11	RES-CHIP	220	5%	1/16W	R8720	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8585	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8723	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8600	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8724	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8625	1-218-951-11	RES-CHIP	680	5%	1/16W	R8725	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8626	1-218-973-11	RES-CHIP	47K	5%	1/16W	R8726	1-218-941-81	RES-CHIP	100 5% 1/16W
R8627	1-218-989-11	RES-CHIP	1M	5%	1/16W	R8727	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8628	1-218-953-11	RES-CHIP	1K	5%	1/16W	R8728	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8629	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8729	1-218-933-11	RES-CHIP	22 5% 1/16W
R8632	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8731	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8634	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8732	1-218-941-81	RES-CHIP	100 5% 1/16W
R8635	1-218-941-81	RES-CHIP	100	5%	1/16W	R8733	1-218-941-81	RES-CHIP	100 5% 1/16W
R8636	1-218-953-11	RES-CHIP	1K	5%	1/16W	R8734	1-218-941-81	RES-CHIP	100 5% 1/16W
R8637	1-218-941-81	RES-CHIP	100	5%	1/16W	R8735	1-218-941-81	RES-CHIP	100 5% 1/16W
R8638	1-218-941-81	RES-CHIP	100	5%	1/16W	R8736	1-218-953-11	RES-CHIP	1K 5% 1/16W
R8639	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8737	1-218-933-11	RES-CHIP	22 5% 1/16W
R8641	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8739	1-218-941-81	RES-CHIP	100 5% 1/16W
R8643	1-218-941-81	RES-CHIP	100	5%	1/16W	R8740	1-218-941-81	RES-CHIP	100 5% 1/16W
R8646	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8741	1-218-933-11	RES-CHIP	22 5% 1/16W
R8647	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8742	1-218-933-11	RES-CHIP	22 5% 1/16W
R8649	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8743	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8656	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8748	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8658	1-218-973-11	RES-CHIP	47K	5%	1/16W	R8749	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8659	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8750	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8661	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8751	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8662	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8752	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8663	1-218-965-11	RES-CHIP	10K	5%	1/16W	R8753	1-218-965-11	RES-CHIP	10K 5% 1/16W

A1

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R8754	1-218-973-11	RES-CHIP	47K 5% 1/16W	R8846	1-208-935-11	METAL CHIP	100K 0.50% 1/16W
R8755	1-218-973-11	RES-CHIP	47K 5% 1/16W	R8850	1-208-713-11	METAL CHIP	18K 0.50% 1/16W
R8756	1-218-969-11	RES-CHIP	22K 5% 1/16W	R8851	1-208-911-11	METAL CHIP	10K 0.50% 1/16W
R8758	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8854	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8759	1-218-990-81	SHORT CHIP	0	R8855	1-218-990-81	SHORT CHIP	0
R8765	1-218-941-81	RES-CHIP	100 5% 1/16W	R8857	1-218-990-81	SHORT CHIP	0
R8766	1-218-941-81	RES-CHIP	100 5% 1/16W	R8862	1-208-911-11	METAL CHIP	10K 0.50% 1/16W
R8768	1-218-990-81	SHORT CHIP	0	R8866	1-218-933-11	RES-CHIP	22 5% 1/16W
R8769	1-218-937-11	RES-CHIP	47 5% 1/16W	R8867	1-218-933-11	RES-CHIP	22 5% 1/16W
R8770	1-218-937-11	RES-CHIP	47 5% 1/16W	R8868	1-218-990-81	SHORT CHIP	0
R8773	1-218-937-11	RES-CHIP	47 5% 1/16W	R8869	1-218-990-81	SHORT CHIP	0
R8774	1-218-937-11	RES-CHIP	47 5% 1/16W	R8870	1-218-990-81	SHORT CHIP	0
R8775	1-218-937-11	RES-CHIP	47 5% 1/16W	R8871	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8776	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8878	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8777	1-218-990-81	SHORT CHIP	0	R8879	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8778	1-218-937-11	RES-CHIP	47 5% 1/16W	R8880	1-218-941-81	RES-CHIP	100 5% 1/16W
R8779	1-218-937-11	RES-CHIP	47 5% 1/16W	R8882	1-218-941-81	RES-CHIP	100 5% 1/16W
R8780	1-218-983-11	RES-CHIP	330K 5% 1/16W	R8883	1-218-941-81	RES-CHIP	100 5% 1/16W
R8781	1-218-983-11	RES-CHIP	330K 5% 1/16W	R8895	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8782	1-208-663-11	METAL CHIP	150 0.50% 1/16W	R8896	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8783	1-208-663-11	METAL CHIP	150 0.50% 1/16W	R8897	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R8784	1-208-663-11	METAL CHIP	150 0.50% 1/16W	R8898	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8785	1-208-663-11	METAL CHIP	150 0.50% 1/16W	R8899	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8786	1-208-663-11	METAL CHIP	150 0.50% 1/16W	R8902	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8787	1-208-663-11	METAL CHIP	150 0.50% 1/16W	R8910	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8788	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	R8911	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8789	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	R8912	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8790	1-218-949-11	RES-CHIP	470 5% 1/16W	R8913	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8791	1-218-949-11	RES-CHIP	470 5% 1/16W	R8914	1-218-973-11	RES-CHIP	47K 5% 1/16W
R8792	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8915	1-218-990-81	SHORT CHIP	0
R8793	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8916	1-218-983-11	RES-CHIP	330K 5% 1/16W
R8795	1-218-941-81	RES-CHIP	100 5% 1/16W	R8917	1-208-911-11	METAL CHIP	10K 0.50% 1/16W
R8796	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R8918	1-208-927-11	METAL CHIP	47K 0.50% 1/16W
R8797	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8919	1-208-935-11	METAL CHIP	100K 0.50% 1/16W
R8799	1-218-965-11	RES-CHIP	10K 5% 1/16W	R8920	1-208-909-11	METAL CHIP	8.2K 0.50% 1/16W
R8807	1-218-990-81	SHORT CHIP	0	R8921	1-218-963-11	RES-CHIP	6.8K 5% 1/16W
R8808	1-218-990-81	SHORT CHIP	0	R8922	1-218-963-11	RES-CHIP	6.8K 5% 1/16W
R8813	1-208-715-11	METAL CHIP	22K 0.50% 1/16W	R8924	1-218-990-81	SHORT CHIP	0
R8814	1-218-958-11	RES-CHIP	2.7K 5% 1/16W	R8926	1-218-990-81	SHORT CHIP	0
R8815	1-208-683-11	METAL CHIP	1K 0.50% 1/16W	R8950	1-218-941-81	RES-CHIP	100 5% 1/16W
R8816	1-208-873-81	METAL CHIP	270 0.50% 1/16W	R8951	1-218-990-81	SHORT CHIP	0
R8817	1-208-927-11	METAL CHIP	47K 0.50% 1/16W	R8953	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8820	1-208-691-11	METAL CHIP	2.2K 0.50% 1/16W	R8954	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8821	1-208-927-11	METAL CHIP	47K 0.50% 1/16W	R8955	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8825	1-218-990-81	SHORT CHIP	0	R9303	1-218-990-81	SHORT CHIP	0
R8827	1-218-990-81	SHORT CHIP	0	R9304	1-218-990-81	SHORT CHIP	0
R8828	1-208-911-11	METAL CHIP	10K 0.50% 1/16W	R9305	1-218-990-81	SHORT CHIP	0
R8829	1-218-990-81	SHORT CHIP	0	R9308	1-218-937-11	RES-CHIP	47 5% 1/16W
R8830	1-218-990-81	SHORT CHIP	0	R9313	1-218-937-11	RES-CHIP	47 5% 1/16W
R8832	1-218-990-81	SHORT CHIP	0	R9314	1-218-937-11	RES-CHIP	47 5% 1/16W
R8833	1-216-864-11	SHORT CHIP	0	R9315	1-218-937-11	RES-CHIP	47 5% 1/16W
R8834	1-216-864-11	SHORT CHIP	0	R9316	1-218-937-11	RES-CHIP	47 5% 1/16W
R8835	1-216-864-11	SHORT CHIP	0	R9317	1-218-937-11	RES-CHIP	47 5% 1/16W
R8836	1-216-864-11	SHORT CHIP	0	R9318	1-218-937-11	RES-CHIP	47 5% 1/16W
R8837	1-218-965-11	RES-CHIP	10K 5% 1/16W	R9327	1-218-965-11	RES-CHIP	10K 5% 1/16W
R8838	1-216-864-11	SHORT CHIP	0	R9329	1-218-937-11	RES-CHIP	47 5% 1/16W
R8839	1-216-864-11	SHORT CHIP	0	R9330	1-218-937-11	RES-CHIP	47 5% 1/16W
R8840	1-216-864-11	SHORT CHIP	0	R9331	1-218-937-11	RES-CHIP	47 5% 1/16W
R8841	1-216-864-11	SHORT CHIP	0	R9332	1-218-937-11	RES-CHIP	47 5% 1/16W
R8842	1-216-864-11	SHORT CHIP	0	R9333	1-218-937-11	RES-CHIP	47 5% 1/16W
R8843	1-216-864-11	SHORT CHIP	0	R9334	1-218-937-11	RES-CHIP	47 5% 1/16W
R8844	1-218-990-81	SHORT CHIP	0	R9343	1-218-941-81	RES-CHIP	100 5% 1/16W
R8845	1-218-990-81	SHORT CHIP	0	R9345	1-218-990-81	SHORT CHIP	0
				R9346	1-218-990-81	SHORT CHIP	0


A1


REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R9347	1-218-990-81	SHORT CHIP	0	R9471	1-218-941-81	RES-CHIP	100 5% 1/16W
R9361	1-218-937-11	RES-CHIP	47 5%	1/16W	R9472	1-218-965-11	RES-CHIP 10K 5% 1/16W
R9362	1-218-990-81	SHORT CHIP	0	R9473	1-218-990-81	SHORT CHIP	0
R9363	1-218-990-81	SHORT CHIP	0	R9601	1-218-973-11	RES-CHIP	47K 5% 1/16W
R9364	1-218-990-81	SHORT CHIP	0	R9602	1-218-969-11	RES-CHIP	22K 5% 1/16W
R9365	1-218-941-81	RES-CHIP	100 5%	R9603	1-218-949-11	RES-CHIP	470 5% 1/16W
R9366	1-218-937-11	RES-CHIP	47 5%	1/16W	R9604	1-218-989-11	RES-CHIP 1M 5% 1/16W
R9367	1-218-941-81	RES-CHIP	100 5%	1/16W	R9606	1-218-965-11	RES-CHIP 10K 5% 1/16W
R9368	1-218-937-11	RES-CHIP	47 5%	1/16W	R9610	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9369	1-218-937-11	RES-CHIP	47 5%	1/16W	R9611	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9370	1-218-941-81	RES-CHIP	100 5%	1/16W	R9616	1-218-990-81	SHORT CHIP 0
R9371	1-218-937-11	RES-CHIP	47 5%	1/16W	R9619	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9372	1-218-937-11	RES-CHIP	47 5%	1/16W	R9620	1-218-937-11	RES-CHIP 47 5% 1/16W
R9373	1-218-941-81	RES-CHIP	100 5%	1/16W	R9621	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9374	1-218-937-11	RES-CHIP	47 5%	1/16W	R9622	1-218-937-11	RES-CHIP 47 5% 1/16W
R9375	1-218-937-11	RES-CHIP	47 5%	1/16W	R9623	1-218-965-11	RES-CHIP 10K 5% 1/16W
R9377	1-218-937-11	RES-CHIP	47 5%	1/16W	R9624	1-218-965-11	RES-CHIP 10K 5% 1/16W
R9379	1-218-941-81	RES-CHIP	100 5%	1/16W	R9625	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9380	1-218-941-81	RES-CHIP	100 5%	1/16W	R9626	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9381	1-218-973-11	RES-CHIP	47K 5%	1/16W	R9630	1-218-990-81	SHORT CHIP 0
R9382	1-218-937-11	RES-CHIP	47 5%	1/16W	R9631	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9383	1-218-937-11	RES-CHIP	47 5%	1/16W	R9633	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9384	1-218-937-11	RES-CHIP	47 5%	1/16W	R9635	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9385	1-218-965-11	RES-CHIP	10K 5%	1/16W	R9636	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9386	1-218-937-11	RES-CHIP	47 5%	1/16W	R9637	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9387	1-218-823-11	METAL CHIP	100 0.50%	1/10W	R9638	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9388	1-218-937-11	RES-CHIP	47 5%	1/16W	R9641	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9391	1-218-965-11	RES-CHIP	10K 5%	1/16W	R9642	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9395	1-218-990-81	SHORT CHIP	0	R9645	1-218-977-11	RES-CHIP 100K 5% 1/16W	
R9396	1-218-990-81	SHORT CHIP	0	R9646	1-218-977-11	RES-CHIP 100K 5% 1/16W	
R9397	1-218-990-81	SHORT CHIP	0	R9658	1-218-953-11	RES-CHIP 1K 5% 1/16W	
R9398	1-218-990-81	SHORT CHIP	0	R9662	1-218-963-11	RES-CHIP 6.8K 5% 1/16W	
R9399	1-218-973-11	RES-CHIP	47K 5%	1/16W	R9663	1-218-966-11	RES-CHIP 12K 5% 1/16W
R9401	1-218-877-11	METAL CHIP	18K 0.50%	1/10W	R9666	1-218-990-81	SHORT CHIP 0
R9402	1-218-869-11	METAL CHIP	8.2K 0.50%	1/10W	R9668	1-218-990-81	SHORT CHIP 0
R9403	1-218-953-11	RES-CHIP	1K 5%	1/16W	R9670	1-218-963-11	RES-CHIP 6.8K 5% 1/16W
R9404	1-218-963-11	RES-CHIP	6.8K 5%	1/16W	R9671	1-218-966-11	RES-CHIP 12K 5% 1/16W
R9405	1-218-966-11	RES-CHIP	12K 5%	1/16W	R9673	1-218-953-11	RES-CHIP 1K 5% 1/16W
R9406	1-218-953-11	RES-CHIP	1K 5%	1/16W	R9677	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9407	1-218-947-11	RES-CHIP	330 5%	1/16W	R9678	1-218-961-11	RES-CHIP 4.7K 5% 1/16W
R9408	1-218-947-11	RES-CHIP	330 5%	1/16W	R9682	1-218-973-11	RES-CHIP 47K 5% 1/16W
R9411	1-218-973-11	RES-CHIP	47K 5%	1/16W	R9683	1-218-973-11	RES-CHIP 47K 5% 1/16W
R9412	1-218-961-11	RES-CHIP	4.7K 5%	1/16W	R9684	1-218-959-11	RES-CHIP 3.3K 5% 1/16W
R9413	1-218-957-11	RES-CHIP	2.2K 5%	1/16W	R9685	1-218-959-11	RES-CHIP 3.3K 5% 1/16W
R9414	1-218-973-11	RES-CHIP	47K 5%	1/16W	R9692	1-218-965-11	RES-CHIP 10K 5% 1/16W
R9415	1-218-957-11	RES-CHIP	2.2K 5%	1/16W	R9694	1-218-965-11	RES-CHIP 10K 5% 1/16W
R9416	1-218-961-11	RES-CHIP	4.7K 5%	1/16W	R9695	1-218-965-11	RES-CHIP 10K 5% 1/16W
R9425	1-218-985-11	RES-CHIP	470K 5%	1/16W	R9803	1-218-964-11	RES-CHIP 8.2K 5% 1/16W
R9426	1-218-985-11	RES-CHIP	470K 5%	1/16W	R9804	1-218-964-11	RES-CHIP 8.2K 5% 1/16W
R9433	1-218-953-11	RES-CHIP	1K 5%	1/16W	R9805	1-218-964-11	RES-CHIP 8.2K 5% 1/16W
R9434	1-218-953-11	RES-CHIP	1K 5%	1/16W	R9806	1-218-964-11	RES-CHIP 8.2K 5% 1/16W
R9437	1-218-959-11	RES-CHIP	3.3K 5%	1/16W	R9807	1-218-973-11	RES-CHIP 47K 5% 1/16W
R9438	1-218-959-11	RES-CHIP	3.3K 5%	1/16W	R9808	1-218-971-11	RES-CHIP 33K 5% 1/16W
R9454	1-218-990-81	SHORT CHIP	0	R9810	1-218-971-11	RES-CHIP 33K 5% 1/16W	
R9458	1-218-990-81	SHORT CHIP	0	R9811	1-218-973-11	RES-CHIP 47K 5% 1/16W	
R9460	1-218-990-81	SHORT CHIP	0	R9814	1-218-990-81	SHORT CHIP 0	
R9461	1-218-990-81	SHORT CHIP	0	R9815	1-218-990-81	SHORT CHIP 0	
R9462	1-218-965-11	RES-CHIP	10K 5%	1/16W	R9816	1-218-975-11	RES-CHIP 68K 5% 1/16W
R9463	1-218-965-11	RES-CHIP	10K 5%	1/16W	R9817	1-218-953-11	RES-CHIP 1K 5% 1/16W
R9466	1-218-965-11	RES-CHIP	10K 5%	1/16W	R9818	1-218-963-11	RES-CHIP 6.8K 5% 1/16W
R9467	1-218-965-11	RES-CHIP	10K 5%	1/16W	R9819	1-218-966-11	RES-CHIP 12K 5% 1/16W
R9468	1-218-965-11	RES-CHIP	10K 5%	1/16W	R9820	1-218-965-11	RES-CHIP 10K 5% 1/16W
R9469	1-218-965-11	RES-CHIP	10K 5%	1/16W	R9821	1-218-963-11	RES-CHIP 6.8K 5% 1/16W
R9470	1-218-965-11	RES-CHIP	10K 5%	1/16W			

A1

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R9822	1-218-971-11	RES-CHIP	33K 5% 1/16W	R9912	1-208-707-11	METAL CHIP	10K 0.50% 1/16W
R9823	1-218-965-11	RES-CHIP	10K 5% 1/16W	R9913	1-218-979-11	RES-CHIP	150K 5% 1/16W
R9824	1-218-990-81	SHORT CHIP	0	R9914	1-208-675-11	METAL CHIP	470 0.50% 1/16W
R9825	1-218-990-81	SHORT CHIP	0	R9915	1-208-707-11	METAL CHIP	10K 0.50% 1/16W
R9829	1-218-977-11	RES-CHIP	100K 5% 1/16W	R9918	1-208-691-11	METAL CHIP	2.2K 0.50% 1/16W
R9830	1-218-977-11	RES-CHIP	100K 5% 1/16W	R9919	1-218-990-81	SHORT CHIP	0
R9831	1-218-990-81	SHORT CHIP	0	R9920	1-218-965-11	RES-CHIP	10K 5% 1/16W
R9832	1-218-973-11	RES-CHIP	47K 5% 1/16W	R9921	1-218-969-11	RES-CHIP	22K 5% 1/16W
R9833	1-218-990-81	SHORT CHIP	0	R9922	1-218-973-11	RES-CHIP	47K 5% 1/16W
R9834	1-218-973-11	RES-CHIP	47K 5% 1/16W	R9923	1-218-953-11	RES-CHIP	1K 5% 1/16W
R9835	1-218-990-81	SHORT CHIP	0	R9924	1-218-965-11	RES-CHIP	10K 5% 1/16W
R9836	1-218-965-11	RES-CHIP	10K 5% 1/16W	R9925	1-218-990-81	SHORT CHIP	0
R9840	1-218-990-81	SHORT CHIP	0	R9926	1-218-990-81	SHORT CHIP	0
R9841	1-218-965-11	RES-CHIP	10K 5% 1/16W	R9928	1-216-795-11	METAL CHIP	6.8 5% 1/10W
R9843	1-218-990-81	SHORT CHIP	0	R9934	1-216-138-00	RES-CHIP	3.3 5% 1/8W
R9845	1-218-990-81	SHORT CHIP	0	R9936	1-216-138-00	RES-CHIP	3.3 5% 1/8W
R9846	1-216-841-11	METAL CHIP	47K 5% 1/10W	R9943	1-216-795-11	METAL CHIP	6.8 5% 1/10W
R9847	1-218-963-11	RES-CHIP	6.8K 5% 1/16W	R9944	1-216-795-11	METAL CHIP	6.8 5% 1/10W
R9848	1-218-963-11	RES-CHIP	6.8K 5% 1/16W	R9945	1-218-958-11	RES-CHIP	2.7K 5% 1/16W
R9849	1-218-867-11	METAL CHIP	6.8K 0.50% 1/10W	R9946	1-218-959-11	RES-CHIP	3.3K 5% 1/16W
R9850	1-218-879-11	METAL CHIP	22K 0.50% 1/10W	R9947	1-218-955-11	RES-CHIP	1.5K 5% 1/16W
R9851	1-218-901-11	METAL CHIP	180K 0.50% 1/10W	R9948	1-218-969-11	RES-CHIP	22K 5% 1/16W
R9852	1-218-867-11	METAL CHIP	6.8K 0.50% 1/10W	R9949	1-218-969-11	RES-CHIP	22K 5% 1/16W
R9853	1-218-963-11	RES-CHIP	6.8K 5% 1/16W	R9950	1-218-989-11	RES-CHIP	1M 5% 1/16W
R9854	1-218-963-11	RES-CHIP	6.8K 5% 1/16W	R9951	1-218-989-11	RES-CHIP	1M 5% 1/16W
R9855	1-216-833-11	METAL CHIP	10K 5% 1/10W	R9953	1-218-973-11	RES-CHIP	47K 5% 1/16W
R9856	1-218-873-11	METAL CHIP	12K 0.50% 1/10W	R9954	1-218-973-11	RES-CHIP	47K 5% 1/16W
R9857	1-218-873-11	METAL CHIP	12K 0.50% 1/10W	< COMPOSITION CIRCUIT BLOCK >			
R9858	1-218-990-81	SHORT CHIP	0	RB8000	1-234-371-21	RES, NETWORK	47 (1005X4)
R9860	1-218-964-11	RES-CHIP	8.2K 5% 1/16W	RB8001	1-234-371-21	RES, NETWORK	47 (1005X4)
R9862	1-216-138-00	RES-CHIP	3.3 5% 1/8W	RB8002	1-234-371-21	RES, NETWORK	47 (1005X4)
R9864	1-216-138-00	RES-CHIP	3.3 5% 1/8W	RB8003	1-234-371-21	RES, NETWORK	47 (1005X4)
R9866	1-216-845-11	METAL CHIP	100K 5% 1/10W	RB8004	1-234-378-21	RES, NETWORK	10K (1005X4)
R9867	1-216-845-11	METAL CHIP	100K 5% 1/10W	RB8005	1-234-378-21	RES, NETWORK	10K (1005X4)
R9868	1-216-845-11	METAL CHIP	100K 5% 1/10W	RB8006	1-234-371-21	RES, NETWORK	47 (1005X4)
R9869	1-216-845-11	METAL CHIP	100K 5% 1/10W	RB8007	1-234-371-21	RES, NETWORK	47 (1005X4)
R9870	1-216-845-11	METAL CHIP	100K 5% 1/10W	RB8008	1-234-371-21	RES, NETWORK	47 (1005X4)
R9871	1-216-845-11	METAL CHIP	100K 5% 1/10W	RB8300	1-234-371-21	RES, NETWORK	47 (1005X4)
R9872	1-216-833-11	METAL CHIP	10K 5% 1/10W	RB8302	1-234-371-21	RES, NETWORK	47 (1005X4)
R9873	1-216-845-11	METAL CHIP	100K 5% 1/10W	RB8500	1-234-378-21	RES, NETWORK	10K (1005X4)
R9877	1-218-867-11	METAL CHIP	6.8K 0.50% 1/10W	RB9300	1-234-372-11	RES, NETWORK	100 (1005X4)
R9878	1-218-877-11	METAL CHIP	18K 0.50% 1/10W	RB9301	1-234-372-11	RES, NETWORK	100 (1005X4)
R9879	1-218-953-11	RES-CHIP	1K 5% 1/16W	RB9302	1-234-372-11	RES, NETWORK	100 (1005X4)
R9887	1-218-959-11	RES-CHIP	3.3K 5% 1/16W	RB9303	1-234-372-11	RES, NETWORK	100 (1005X4)
R9888	1-218-973-11	RES-CHIP	47K 5% 1/16W	RB9304	1-234-372-11	RES, NETWORK	100 (1005X4)
R9889	1-218-959-11	RES-CHIP	3.3K 5% 1/16W	RB9305	1-234-372-11	RES, NETWORK	100 (1005X4)
R9890	1-218-965-11	RES-CHIP	10K 5% 1/16W	RB9306	1-234-372-11	RES, NETWORK	100 (1005X4)
R9891	1-218-990-81	SHORT CHIP	0	< TERMINAL >			
R9892	1-218-965-11	RES-CHIP	10K 5% 1/16W	TB8300	1-780-271-11	S CONNECTOR BLOCK	
R9893	1-218-965-11	RES-CHIP	10K 5% 1/16W	TB8301	1-780-272-11	TERMINAL BOARD	
R9894	1-218-965-11	RES-CHIP	10K 5% 1/16W	< TEST PIN >			
R9897	1-218-965-11	RES-CHIP	10K 5% 1/16W	TP8000	1-535-757-11	CHIP, CHECKER	
R9898	1-216-864-11	SHORT CHIP	0	TP8001	1-535-757-11	CHIP, CHECKER	
R9899	1-218-831-11	METAL CHIP	220 0.50% 1/10W	TP8002	1-535-757-11	CHIP, CHECKER	
R9902	1-218-990-81	SHORT CHIP	0	< VARISTOR >			
R9903	1-218-990-81	SHORT CHIP	0	VD8320	1-803-742-21	VARISTOR, CHIP	
R9904	1-218-973-11	RES-CHIP	47K 5% 1/16W	VD8321	1-803-742-21	VARISTOR, CHIP	
R9905	1-218-975-11	RES-CHIP	68K 5% 1/16W	VD8570	1-802-078-11	VARISTOR (SMD)	
R9906	1-218-965-11	RES-CHIP	10K 5% 1/16W	VD8571	1-802-078-11	VARISTOR (SMD)	
R9907	1-218-965-11	RES-CHIP	10K 5% 1/16W	VD8572	1-802-078-11	VARISTOR (SMD)	
R9908	1-208-699-11	METAL CHIP	4.7K 0.50% 1/16W				
R9910	1-218-965-11	RES-CHIP	10K 5% 1/16W				
R9911	1-208-707-11	METAL CHIP	10K 0.50% 1/16W				



The components identified by mark  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.


Les composants identifiés par la marque  contiennent des informations confidentielles. Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et/ou réparé.

**KDS-50A2020/55A2020/60A2020**

RM-YD010 RM-YD010 RM-YD010

**A1**

**B1**

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
< VIBRATOR >				C4510	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V
X8001	1-813-784-21	VIBRATOR, CRYSTAL		C4511	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V
X8002	1-813-113-11	VIBRATOR, CRYSTAL		C4512	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V
X8300	1-781-922-21	VIBRATOR, CERAMIC		C4513	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V
X8500	1-813-374-21	QUARTS CRYSTAL VIBRATOR		C4514	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V
X9301	1-795-612-11	VIBRATOR, CRYSTAL		C4515	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V
*****				C4519	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V
 A-1205-147A B1 BOARD, COMPLETE				C4521	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V
*****				C4523	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V
< CAPACITOR >				C4524	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V
C4003	1-100-566-91	CERAMIC CHIP	0.1uF 10% 25V	C4525	1-124-779-00	ELECT CHIP	10uF 20% 16V
C4004	1-100-566-91	CERAMIC CHIP	0.1uF 10% 25V	C4526	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V
C4006	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4528	1-164-937-11	CERAMIC CHIP	0.001uF 10% 50V
C4007	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4529	1-124-779-00	ELECT CHIP	10uF 20% 16V
C4008	1-100-566-91	CERAMIC CHIP	0.1uF 10% 25V	C4532	1-126-394-11	ELECT CHIP	10uF 20% 16V
C4009	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4533	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V
C4010	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V	C4534	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4011	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V	C4535	1-165-989-11	CERAMIC CHIP	10uF 10% 6.3V
C4016	1-100-566-91	CERAMIC CHIP	0.1uF 10% 25V	C4536	1-126-394-11	ELECT CHIP	10uF 20% 16V
C4017	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4537	1-126-394-11	ELECT CHIP	10uF 20% 16V
C4018	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V	C4538	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4019	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V	C4539	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4020	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V	C4540	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4021	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V	C4541	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4301	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4542	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4302	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4543	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4304	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4544	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4307	1-112-066-11	CERAMIC CHIP	10uF 10% 10V	C4545	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4317	1-162-966-11	CERAMIC CHIP	0.0022uF 10% 50V	C4552	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4319	1-164-870-11	CERAMIC CHIP	68PF 5% 50V	C4553	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4324	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4554	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4325	1-100-911-11	CERAMIC CHIP	4.7uF 10% 25V	C4555	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4327	1-162-959-11	CERAMIC CHIP	330PF 5% 50V	C4556	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4329	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	C4557	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4331	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	C4558	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4333	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	C4561	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4335	1-100-907-11	CERAMIC CHIP	0.1uF 10% 10V	C4562	1-126-394-11	ELECT CHIP	10uF 20% 16V
C4337	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	C4563	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4339	1-115-412-11	CERAMIC CHIP	680PF 5% 25V	C4565	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4341	1-164-227-11	CERAMIC CHIP	0.022uF 10% 25V	C4566	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4345	1-112-066-11	CERAMIC CHIP	10uF 10% 10V	C4568	1-100-905-11	CERAMIC CHIP	0.001uF 10% 50V
C4377	1-100-591-91	CERAMIC CHIP	1uF 10% 25V	C4569	1-126-394-11	ELECT CHIP	10uF 20% 16V
C4380	1-112-066-11	CERAMIC CHIP	10uF 10% 10V	C4570	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4391	1-164-935-11	CERAMIC CHIP	470PF 10% 50V	C4572	1-126-394-11	ELECT CHIP	10uF 20% 16V
C4392	1-164-935-11	CERAMIC CHIP	470PF 10% 50V	C4800	1-131-661-21	ELECT CHIP	100uF 20% 10V
C4395	1-164-939-11	CERAMIC CHIP	0.0022uF 10% 50V	C4802	1-164-874-11	CERAMIC CHIP	100PF 5% 50V
C4396	1-164-939-11	CERAMIC CHIP	0.0022uF 10% 50V	C4804	1-131-661-21	ELECT CHIP	100uF 20% 10V
C4399	1-110-501-11	CERAMIC CHIP	0.33uF 10% 16V	C4805	1-164-874-11	CERAMIC CHIP	100PF 5% 50V
C4400	1-126-391-11	ELECT CHIP	47uF 20% 6.3V	C4806	1-131-661-21	ELECT CHIP	100uF 20% 10V
C4403	1-100-907-11	CERAMIC CHIP	0.1uF 10% 10V	C4807	1-131-661-21	ELECT CHIP	100uF 20% 10V
C4500	1-164-866-11	CERAMIC CHIP	47PF 5% 50V	C4808	1-131-661-21	ELECT CHIP	100uF 20% 10V
C4501	1-164-866-11	CERAMIC CHIP	47PF 5% 50V	C4809	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4502	1-164-866-11	CERAMIC CHIP	47PF 5% 50V	C4810	1-164-874-11	CERAMIC CHIP	100PF 5% 50V
C4503	1-164-866-11	CERAMIC CHIP	47PF 5% 50V	C4811	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4504	1-125-889-91	CERAMIC CHIP	2.2uF 10% 10V	C4812	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4505	1-125-889-91	CERAMIC CHIP	2.2uF 10% 10V	C4813	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4506	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C4814	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4507	1-125-777-11	CERAMIC CHIP	0.1uF 10% 10V	C4815	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4508	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V	C4816	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
C4509	1-100-567-81	CERAMIC CHIP	10000PF 10% 25V	C4817	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
				C4818	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
				C4819	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
				C4820	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V
				C4821	1-100-906-11	CERAMIC CHIP	0.01uF 10% 16V





REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK
C5335	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5907	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5336	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5908	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5337	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5909	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5338	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5910	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5339	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5911	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5340	1-126-390-11	ELECT CHIP	22uF	20% 6.3V	C5912	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5341	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5913	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5342	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	C5914	1-164-937-11	CERAMIC CHIP	0.001uF	10% 50V
C5343	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	C5915	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5344	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	C5916	1-100-907-11	CERAMIC CHIP	0.1uF	10% 10V
C5345	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	C5917	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V
C5346	1-126-412-11	ELECT CHIP	220uF	20% 4V	C5918	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5347	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	C5919	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5348	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5920	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5349	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5921	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5350	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5922	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5351	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5923	1-164-937-11	CERAMIC CHIP	0.001uF	10% 50V
C5352	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5924	1-164-937-11	CERAMIC CHIP	0.001uF	10% 50V
C5353	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5925	1-164-937-11	CERAMIC CHIP	0.001uF	10% 50V
C5354	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5926	1-164-937-11	CERAMIC CHIP	0.001uF	10% 50V
C5355	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5927	1-164-937-11	CERAMIC CHIP	0.001uF	10% 50V
C5356	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5928	1-164-874-11	CERAMIC CHIP	100PF	5% 50V
C5357	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5929	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V
C5358	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5930	1-100-907-11	CERAMIC CHIP	0.1uF	10% 10V
C5359	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5931	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V
C5360	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5932	1-164-937-11	CERAMIC CHIP	0.001uF	10% 50V
C5361	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5933	1-164-874-11	CERAMIC CHIP	100PF	5% 50V
C5362	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	C5934	1-100-907-11	CERAMIC CHIP	0.1uF	10% 10V
C5363	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V			< CONNECTOR >		
C5368	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	CN4500	1-820-378-11	HDMI CONNECTOR		
C5369	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	CN4501	1-820-378-11	HDMI CONNECTOR		
C5370	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	CN5900	1-819-614-11	HEADER ASSEMBLY FOR PWB 41P		
C5371	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V			< DIODE >		
C5372	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	D4301	8-719-069-29	DIODE RB520S-30TE61		
C5373	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	D4304	8-719-078-04	DIODE EC31QS03L-TE12L		
C5375	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	D4305	8-719-078-04	DIODE EC31QS03L-TE12L		
C5376	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	D4308	6-500-294-01	DIODE PTZ-TE25-3.9B		
C5377	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	D4309	6-500-294-01	DIODE PTZ-TE25-3.9B		
C5378	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	D4311	8-719-069-29	DIODE RB520S-30TE61		
C5379	1-100-907-11	CERAMIC CHIP	0.1uF	10% 10V	D4312	8-719-082-02	DIODE MM3Z3V9T1		
C5380	1-100-907-11	CERAMIC CHIP	0.1uF	10% 10V	D4506	8-719-081-97	DIODE MMDL914T1		
C5381	1-100-907-11	CERAMIC CHIP	0.1uF	10% 10V	D4507	8-719-081-97	DIODE MMDL914T1		
C5390	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	D4510	8-719-977-28	DIODE DTZ10B		
C5391	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	D4513	8-719-977-28	DIODE DTZ10B		
C5392	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	D4520	8-719-081-97	DIODE MMDL914T1		
C5393	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	D4521	8-719-081-97	DIODE MMDL914T1		
C5394	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	D4522	8-719-050-38	DIODE M1MA152WK-T1		
C5395	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V	D4523	8-719-050-38	DIODE M1MA152WK-T1		
C5396	1-100-907-11	CERAMIC CHIP	0.1uF	10% 10V	D5100	8-719-045-61	DIODE SEC1901C		
C5400	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V			< FUSE >		
C5401	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	F4000	1-576-603-21	FUSE 3.15A 24V		
C5402	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	F4301	1-576-603-21	FUSE 3.15A 24V		
C5403	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	F4304	1-576-603-21	FUSE 3.15A 24V		
C5404	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	F4305	1-576-596-21	FUSE 1A 32V		
C5406	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V	F4306	1-576-416-21	FUSE 2A 36V		
C5407	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V			< FERRITE BEAD >		
C5900	1-164-874-11	CERAMIC CHIP	100PF	5% 50V	FB4000	1-400-580-21	FERRITE, EMI (SMD)		
C5901	1-164-937-11	CERAMIC CHIP	0.001uF	10% 50V	FB4001	1-400-580-21	FERRITE, EMI (SMD)		
C5902	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V					
C5903	1-100-907-11	CERAMIC CHIP	0.1uF	10% 10V					
C5904	1-100-909-11	CERAMIC CHIP	10uF	10% 6.3V					
C5905	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V					
C5906	1-100-906-11	CERAMIC CHIP	0.01uF	10% 16V					

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
FB4003	1-400-382-11	EMI FERRITE (SMD) (1608)		IC4306	6-705-292-01	IC PQ018EH02ZPH	
FB4005	1-400-580-21	FERRITE, EMI (SMD)		IC4500	6-704-600-01	IC M24C02-WMN6T (B)	
FB4006	1-400-580-21	FERRITE, EMI (SMD)					
FB4007	1-400-382-11	EMI FERRITE (SMD) (1608)		IC4501	6-704-600-01	IC M24C02-WMN6T (B)	
FB4008	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4502	6-708-758-01	IC PCA9517DP.118	
FB4009	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4503	6-708-758-01	IC PCA9517DP.118	
FB4010	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4504	8-759-596-34	IC SN74LV4053APWR	
FB4011	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4505	8-753-255-97	IC CXB1441R-T4	
FB4012	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4506	6-708-703-01	IC SII9011CTU	
FB4015	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4800	8-753-270-44	IC CXD3814GB-TL	
FB4017	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4802	6-706-794-01	IC MT48LC4M16A2P-75:G-TR	
FB4019	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4803	6-705-529-01	IC LMH6658MMX/J5000172	
FB4020	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC4807	8-759-549-01	IC SN74LV125APWR	
FB4021	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC5000	8-753-250-46	IC CXD2097BQ-1	
FB4202	1-469-083-21	INDUCTOR, FERRITE BEAD (1005)		IC5001	6-707-786-01	IC IS42S16100C1-7TL-TR	
FB4302	1-414-554-21	FERRITE, EMI (SMD) (1608)		IC5003	6-709-646-01	IC TLC2933AIPWR	
FB4303	1-414-554-21	FERRITE, EMI (SMD) (1608)		IC5100	6-704-353-01	IC SN74LVC2G34DCKR	
FB4304	1-400-580-21	FERRITE, EMI (SMD)		IC5101	6-703-175-01	IC PST3629UL	
FB4308	1-400-580-21	FERRITE, EMI (SMD)		IC5102	6-708-754-01	IC CY22392ZXC-380T	
FB4313	1-400-580-21	FERRITE, EMI (SMD)		IC5103	6-705-019-01	IC PST3620UL	
FB4500	1-414-554-21	FERRITE, EMI (SMD) (1608)		IC5104	6-703-589-01	IC SN74LVC1G125DCKR	
FB4501	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5105	6-703-589-01	IC SN74LVC1G125DCKR	
FB4502	1-400-499-21	FERRITE, EMI (SMD)		IC5107	8-753-260-29	IC CXD4713GB	
FB4503	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5300	6-707-822-01	IC EM6A9320BI-5MG	
FB4504	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5301	6-807-015-01	IC S29JL032H70TFI010-SP3-BE200	
FB4505	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5302	6-707-822-01	IC EM6A9320BI-5MG	
FB4506	1-400-499-21	FERRITE, EMI (SMD)		IC5304	6-707-373-01	IC TPS51100DQGR	
FB4507	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5400	6-709-601-01	IC SN74ALVCH16374DGGR	
FB4508	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5401	6-709-601-01	IC SN74ALVCH16374DGGR	
FB4800	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5402	8-759-829-30	IC CY2305SXC-1HT	
FB4801	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5403	6-709-600-01	IC SN74LVC2G79DCUR	
FB4802	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5404	8-759-549-01	IC SN74LV125APWR	
FB4803	1-400-382-11	EMI FERRITE (SMD) (1608)		IC5900	6-708-704-01	IC THC63LVD1023	
FB4804	1-414-445-11	BEAD, FERRITE (CHIP) (1608)				< JACK >	
FB5000	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		J4500	1-819-327-11	PHONO JACK 2P	
FB5001	1-400-382-11	EMI FERRITE (SMD) (1608)				< COIL >	
FB5100	1-400-580-21	FERRITE, EMI (SMD)		L4302	1-424-918-21	INDUCTOR 10uH	
FB5101	1-400-580-21	FERRITE, EMI (SMD)		L4303	1-457-247-21	INDUCTOR 4.7uH	
FB5102	1-400-580-21	FERRITE, EMI (SMD)		L4307	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
FB5103	1-400-580-21	FERRITE, EMI (SMD)		L4308	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
FB5104	1-400-580-21	FERRITE, EMI (SMD)		L4309	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
FB5105	1-400-580-21	FERRITE, EMI (SMD)		L4310	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
FB5106	1-400-580-21	FERRITE, EMI (SMD)		L4311	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
FB5107	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		L4312	1-400-180-21	INDUCTOR, EMI FERRITE (1608)	
FB5300	1-400-580-21	FERRITE, EMI (SMD)		L4800	1-469-549-21	INDUCTOR 1uH	
FB5301	1-400-580-21	FERRITE, EMI (SMD)		L4801	1-469-549-21	INDUCTOR 1uH	
FB5302	1-400-580-21	FERRITE, EMI (SMD)		L4802	1-469-549-21	INDUCTOR 1uH	
FB5305	1-400-382-11	EMI FERRITE (SMD) (1608)		L4803	1-469-549-21	INDUCTOR 1uH	
FB5306	1-400-382-11	EMI FERRITE (SMD) (1608)		L4805	1-469-555-21	INDUCTOR 10uH	
FB5308	1-400-382-11	EMI FERRITE (SMD) (1608)		L4806	1-469-555-21	INDUCTOR 10uH	
FB5400	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		L4808	1-469-555-21	INDUCTOR 10uH	
FB5401	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		L5000	1-469-555-21	INDUCTOR 10uH	
FB5402	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		L5001	1-469-555-21	INDUCTOR 10uH	
FB5403	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		L5100	1-469-553-21	INDUCTOR 4.7uH	
FB5404	1-414-445-11	BEAD, FERRITE (CHIP) (1608)		L5101	1-469-555-21	INDUCTOR 10uH	
		< FILTER >		L5900	1-469-555-21	INDUCTOR 10uH	
FL4801	1-813-815-21	LOWPASS FILTER		L5901	1-469-555-21	INDUCTOR 10uH	
		< IC >		L5902	1-456-583-11	COMMON MODE CHOKE COIL	
IC4000	6-708-758-01	IC PCA9517DP.118		L5903	1-469-555-21	INDUCTOR 10uH	
IC4301	6-706-884-01	IC BD9851EFV-E2		L5904	1-456-583-11	COMMON MODE CHOKE COIL	
IC4305	6-708-603-01	IC PQ070XNA1ZPH		L5905	1-456-583-11	COMMON MODE CHOKE COIL	
				L5906	1-456-583-11	COMMON MODE CHOKE COIL	

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
L5907	1-456-583-11	COMMON MODE CHOKE COIL		R4028	1-218-990-81	SHORT CHIP	0
L5908	1-456-583-11	COMMON MODE CHOKE COIL		R4029	1-218-990-81	SHORT CHIP	0
L5909	1-456-583-11	COMMON MODE CHOKE COIL		R4030	1-218-990-81	SHORT CHIP	0
L5910	1-456-583-11	COMMON MODE CHOKE COIL					
L5911	1-456-583-11	COMMON MODE CHOKE COIL		R4031	1-218-990-81	SHORT CHIP	0
L5912	1-456-583-11	COMMON MODE CHOKE COIL		R4032	1-218-990-81	SHORT CHIP	0
L5913	1-456-583-11	COMMON MODE CHOKE COIL		R4033	1-218-990-81	SHORT CHIP	0
L5914	1-456-583-11	COMMON MODE CHOKE COIL		R4034	1-218-990-81	SHORT CHIP	0
		< TRANSISTOR >		R4035	1-218-990-81	SHORT CHIP	0
Q4301	6-551-382-01	TRANSISTOR RSS040P03FD5TB		R4036	1-218-990-81	SHORT CHIP	0
Q4302	6-551-382-01	TRANSISTOR RSS040P03FD5TB		R4037	1-218-990-81	SHORT CHIP	0
Q4304	6-550-586-01	TRANSISTOR 2PA1576R-115		R4038	1-218-990-81	SHORT CHIP	0
Q4305	6-550-585-01	TRANSISTOR 2PC4081R-115		R4039	1-218-990-81	SHORT CHIP	0
Q4500	8-729-028-99	TRANSISTOR DTC114YUA-T106		R4040	1-218-990-81	SHORT CHIP	0
Q4501	8-729-028-99	TRANSISTOR DTC114YUA-T106		R4041	1-218-990-81	SHORT CHIP	0
Q4502	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		R4042	1-218-990-81	SHORT CHIP	0
Q4503	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		R4043	1-218-990-81	SHORT CHIP	0
Q4504	8-729-028-99	TRANSISTOR DTC114YUA-T106		R4044	1-218-990-81	SHORT CHIP	0
Q4505	8-729-028-99	TRANSISTOR DTC114YUA-T106		R4045	1-218-990-81	SHORT CHIP	0
Q4506	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4046	1-218-990-81	SHORT CHIP	0
Q4507	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4047	1-218-990-81	SHORT CHIP	0
Q4508	8-729-028-99	TRANSISTOR DTC114YUA-T106		R4049	1-218-990-81	SHORT CHIP	0
Q4509	8-729-028-99	TRANSISTOR DTC114YUA-T106		R4050	1-218-990-81	SHORT CHIP	0
Q4510	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4051	1-218-990-81	SHORT CHIP	0
Q4511	8-729-028-99	TRANSISTOR DTC114YUA-T106		R4052	1-218-990-81	SHORT CHIP	0
Q4512	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4053	1-218-990-81	SHORT CHIP	0
Q4800	8-729-159-65	TRANSISTOR 2SD596-DV5		R4054	1-218-990-81	SHORT CHIP	0
Q4801	8-729-162-45	TRANSISTOR 2SB624-BV5		R4055	1-218-990-81	SHORT CHIP	0
Q4802	6-550-586-01	TRANSISTOR 2PA1576R-115		R4057	1-218-990-81	SHORT CHIP	0
Q4804	6-550-585-01	TRANSISTOR 2PC4081R-115		R4058	1-218-990-81	SHORT CHIP	0
Q4805	6-550-586-01	TRANSISTOR 2PA1576R-115		R4059	1-218-990-81	SHORT CHIP	0
Q4810	6-550-585-01	TRANSISTOR 2PC4081R-115		R4060	1-218-990-81	SHORT CHIP	0
Q4811	6-550-586-01	TRANSISTOR 2PA1576R-115		R4064	1-218-990-81	SHORT CHIP	0
Q4812	6-550-586-01	TRANSISTOR 2PA1576R-115		R4065	1-218-990-81	SHORT CHIP	0
Q4817	6-550-585-01	TRANSISTOR 2PC4081R-115		R4066	1-218-990-81	SHORT CHIP	0
Q4818	6-550-586-01	TRANSISTOR 2PA1576R-115		R4067	1-218-990-81	SHORT CHIP	0
Q4819	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4068	1-218-990-81	SHORT CHIP	0
Q5100	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4075	1-218-990-81	SHORT CHIP	0
Q5400	8-729-028-96	TRANSISTOR DTC114EUA-T106		R4095	1-218-990-81	SHORT CHIP	0
		< RESISTOR >		R4100	1-218-933-11	RES-CHIP	22 5% 1/16W
R4000	1-218-933-11	RES-CHIP	22 5% 1/16W	R4101	1-218-933-11	RES-CHIP	22 5% 1/16W
R4001	1-218-933-11	RES-CHIP	22 5% 1/16W	R4102	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R4002	1-218-955-11	RES-CHIP	1.5K 5% 1/16W	R4103	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R4003	1-218-959-11	RES-CHIP	3.3K 5% 1/16W	R4205	1-218-990-81	SHORT CHIP	0
R4004	1-218-973-11	RES-CHIP	47K 5% 1/16W	R4206	1-218-990-81	SHORT CHIP	0
R4005	1-218-957-11	RES-CHIP	2.2K 5% 1/16W	R4207	1-218-990-81	SHORT CHIP	0
R4006	1-218-990-81	SHORT CHIP	0	R4208	1-218-990-81	SHORT CHIP	0
R4007	1-218-990-81	SHORT CHIP	0	R4209	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4008	1-218-990-81	SHORT CHIP	0	R4210	1-218-990-81	SHORT CHIP	0
R4009	1-218-990-81	SHORT CHIP	0	R4216	1-218-933-11	RES-CHIP	22 5% 1/16W
R4010	1-218-990-81	SHORT CHIP	0	R4222	1-218-990-81	SHORT CHIP	0
R4011	1-218-990-81	SHORT CHIP	0	R4223	1-218-990-81	SHORT CHIP	0
R4012	1-218-990-81	SHORT CHIP	0	R4224	1-218-990-81	SHORT CHIP	0
R4014	1-218-990-81	SHORT CHIP	0	R4225	1-218-990-81	SHORT CHIP	0
R4016	1-218-990-81	SHORT CHIP	0	R4226	1-218-990-81	SHORT CHIP	0
R4018	1-218-990-81	SHORT CHIP	0	R4230	1-218-990-81	SHORT CHIP	0
R4020	1-218-990-81	SHORT CHIP	0	R4231	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4022	1-218-990-81	SHORT CHIP	0	R4232	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4023	1-218-990-81	SHORT CHIP	0	R4240	1-218-990-81	SHORT CHIP	0
R4024	1-218-990-81	SHORT CHIP	0	R4241	1-218-990-81	SHORT CHIP	0
R4026	1-218-990-81	SHORT CHIP	0	R4308	1-218-985-11	RES-CHIP	470K 5% 1/16W
R4027	1-218-990-81	SHORT CHIP	0	R4311	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
				R4322	1-218-963-11	RES-CHIP	6.8K 5% 1/16W
				R4327	1-218-958-11	RES-CHIP	2.7K 5% 1/16W

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R4328	1-208-931-11	METAL CHIP	68K 0.50% 1/16W	R4575	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4329	1-208-927-11	METAL CHIP	47K 0.50% 1/16W	R4576	1-218-951-11	RES-CHIP	680 5% 1/16W
R4334	1-208-711-11	METAL CHIP	15K 0.50% 1/16W	R4577	1-218-990-81	SHORT CHIP	0
R4335	1-208-911-11	METAL CHIP	10K 0.50% 1/16W	R4578	1-218-990-81	SHORT CHIP	0
R4337	1-208-905-11	METAL CHIP	5.6K 0.50% 1/16W	R4580	1-218-990-81	SHORT CHIP	0
R4343	1-208-699-11	METAL CHIP	4.7K 0.50% 1/16W	R4581	1-218-990-81	SHORT CHIP	0
R4344	1-208-909-11	METAL CHIP	8.2K 0.50% 1/16W	R4582	1-218-937-11	RES-CHIP	47 5% 1/16W
R4345	1-208-927-11	METAL CHIP	47K 0.50% 1/16W	R4583	1-218-937-11	RES-CHIP	47 5% 1/16W
R4347	1-218-949-11	RES-CHIP	470 5% 1/16W	R4584	1-218-937-11	RES-CHIP	47 5% 1/16W
R4350	1-218-985-11	RES-CHIP	470K 5% 1/16W	R4585	1-218-937-11	RES-CHIP	47 5% 1/16W
R4353	1-218-947-11	RES-CHIP	330 5% 1/16W	R4586	1-218-937-11	RES-CHIP	47 5% 1/16W
R4354	1-218-990-81	SHORT CHIP	0	R4587	1-218-937-11	RES-CHIP	47 5% 1/16W
R4355	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4588	1-218-937-11	RES-CHIP	47 5% 1/16W
R4356	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4589	1-218-937-11	RES-CHIP	47 5% 1/16W
R4357	1-218-973-11	RES-CHIP	47K 5% 1/16W	R4598	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R4358	1-218-953-11	RES-CHIP	1K 5% 1/16W	R4599	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R4359	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4600	1-216-864-11	SHORT CHIP	0
R4396	1-208-675-11	METAL CHIP	470 0.50% 1/16W	R4601	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4397	1-218-990-81	SHORT CHIP	0	R4602	1-218-937-11	RES-CHIP	47 5% 1/16W
R4398	1-208-683-11	METAL CHIP	1K 0.50% 1/16W	R4603	1-218-937-11	RES-CHIP	47 5% 1/16W
R4503	1-218-929-11	RES-CHIP	10 5% 1/16W	R4605	1-216-864-11	SHORT CHIP	0
R4504	1-218-929-11	RES-CHIP	10 5% 1/16W	R4609	1-218-990-81	SHORT CHIP	0
R4505	1-218-947-11	RES-CHIP	330 5% 1/16W	R4610	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R4506	1-218-947-11	RES-CHIP	330 5% 1/16W	R4611	1-218-933-11	RES-CHIP	22 5% 1/16W
R4507	1-208-683-11	METAL CHIP	1K 0.50% 1/16W	R4612	1-218-937-11	RES-CHIP	47 5% 1/16W
R4508	1-208-683-11	METAL CHIP	1K 0.50% 1/16W	R4613	1-218-937-11	RES-CHIP	47 5% 1/16W
R4509	1-218-985-11	RES-CHIP	470K 5% 1/16W	R4614	1-218-937-11	RES-CHIP	47 5% 1/16W
R4510	1-208-911-11	METAL CHIP	10K 0.50% 1/16W	R4615	1-218-937-11	RES-CHIP	47 5% 1/16W
R4511	1-208-911-11	METAL CHIP	10K 0.50% 1/16W	R4616	1-218-937-11	RES-CHIP	47 5% 1/16W
R4512	1-218-985-11	RES-CHIP	470K 5% 1/16W	R4617	1-218-937-11	RES-CHIP	47 5% 1/16W
R4513	1-218-941-81	RES-CHIP	100 5% 1/16W	R4618	1-218-937-11	RES-CHIP	47 5% 1/16W
R4514	1-218-941-81	RES-CHIP	100 5% 1/16W	R4619	1-218-937-11	RES-CHIP	47 5% 1/16W
R4515	1-218-941-81	RES-CHIP	100 5% 1/16W	R4621	1-218-933-11	RES-CHIP	22 5% 1/16W
R4516	1-218-941-81	RES-CHIP	100 5% 1/16W	R4622	1-218-929-11	RES-CHIP	10 5% 1/16W
R4517	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R4623	1-216-864-11	SHORT CHIP	0
R4518	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R4625	1-216-295-91	SHORT CHIP	0
R4519	1-218-973-11	RES-CHIP	47K 5% 1/16W	R4800	1-216-864-11	SHORT CHIP	0
R4520	1-218-973-11	RES-CHIP	47K 5% 1/16W	R4802	1-218-937-11	RES-CHIP	47 5% 1/16W
R4521	1-218-973-11	RES-CHIP	47K 5% 1/16W	R4803	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4522	1-218-973-11	RES-CHIP	47K 5% 1/16W	R4811	1-218-929-11	RES-CHIP	10 5% 1/16W
R4523	1-218-973-11	RES-CHIP	47K 5% 1/16W	R4812	1-218-929-11	RES-CHIP	10 5% 1/16W
R4524	1-218-973-11	RES-CHIP	47K 5% 1/16W	R4813	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4525	1-218-941-81	RES-CHIP	100 5% 1/16W	R4814	1-218-933-11	RES-CHIP	22 5% 1/16W
R4526	1-218-990-81	SHORT CHIP	0	R4815	1-218-958-11	RES-CHIP	2.7K 5% 1/16W
R4527	1-218-990-81	SHORT CHIP	0	R4819	1-218-929-11	RES-CHIP	10 5% 1/16W
R4528	1-218-941-81	RES-CHIP	100 5% 1/16W	R4820	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4529	1-218-990-81	SHORT CHIP	0	R4821	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4530	1-218-990-81	SHORT CHIP	0	R4823	1-218-990-81	SHORT CHIP	0
R4533	1-218-990-81	SHORT CHIP	0	R4824	1-218-990-81	SHORT CHIP	0
R4534	1-218-990-81	SHORT CHIP	0	R4825	1-218-990-81	SHORT CHIP	0
R4535	1-218-990-81	SHORT CHIP	0	R4826	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4544	1-218-990-81	SHORT CHIP	0	R4827	1-218-965-11	RES-CHIP	10K 5% 1/16W
R4545	1-218-990-81	SHORT CHIP	0	R4829	1-218-990-81	SHORT CHIP	0
R4554	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R4831	1-220-884-81	METAL CHIP	39 0.50% 1/16W
R4555	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R4833	1-208-675-11	METAL CHIP	470 0.50% 1/16W
R4557	1-218-990-81	SHORT CHIP	0	R4835	1-208-695-11	METAL CHIP	3.3K 0.50% 1/16W
R4559	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R4836	1-208-893-11	METAL CHIP	1.8K 0.50% 1/16W
R4560	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R4837	1-218-849-11	METAL CHIP	1.2K 0.50% 1/10W
R4561	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4844	1-218-990-81	SHORT CHIP	0
R4562	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4845	1-218-937-11	RES-CHIP	47 5% 1/16W
R4563	1-218-965-11	RES-CHIP	10K 5% 1/16W	R4846	1-218-945-11	RES-CHIP	220 5% 1/16W
R4572	1-218-951-11	RES-CHIP	680 5% 1/16W	R4847	1-208-699-11	METAL CHIP	4.7K 0.50% 1/16W
R4573	1-218-951-11	RES-CHIP	680 5% 1/16W	R4848	1-208-699-11	METAL CHIP	4.7K 0.50% 1/16W
R4574	1-208-699-11	METAL CHIP	4.7K 0.50% 1/16W				

**B1**

REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK
R4849	1-218-943-11	RES-CHIP	150	5% 1/16W	R4937	1-218-933-11	RES-CHIP	22	5% 1/16W
R4851	1-218-951-11	RES-CHIP	680	5% 1/16W	R4938	1-218-933-11	RES-CHIP	22	5% 1/16W
R4852	1-218-941-11	RES-CHIP	100	5% 1/16W	R4939	1-218-990-81	SHORT CHIP	0	
					R4940	1-218-990-81	SHORT CHIP	0	
R4854	1-218-941-11	RES-CHIP	100	5% 1/16W	R4942	1-218-929-11	RES-CHIP	10	5% 1/16W
R4855	1-218-937-11	RES-CHIP	47	5% 1/16W					
R4856	1-218-937-11	RES-CHIP	47	5% 1/16W	R4943	1-218-941-81	RES-CHIP	100	5% 1/16W
R4857	1-218-990-81	SHORT CHIP	0		R4944	1-218-941-81	RES-CHIP	100	5% 1/16W
R4858	1-208-643-11	METAL CHIP	22	0.50% 1/16W	R5002	1-218-937-11	RES-CHIP	47	5% 1/16W
					R5003	1-218-945-11	RES-CHIP	220	5% 1/16W
R4859	1-218-990-81	SHORT CHIP	0		R5004	1-218-933-11	RES-CHIP	22	5% 1/16W
R4860	1-208-643-11	METAL CHIP	22	0.50% 1/16W					
R4861	1-218-990-81	SHORT CHIP	0		R5005	1-218-933-11	RES-CHIP	22	5% 1/16W
R4862	1-218-941-11	RES-CHIP	100	5% 1/16W	R5006	1-218-941-81	RES-CHIP	100	5% 1/16W
R4863	1-218-941-11	RES-CHIP	100	5% 1/16W	R5007	1-218-941-81	RES-CHIP	100	5% 1/16W
					R5008	1-218-933-11	RES-CHIP	22	5% 1/16W
R4864	1-208-643-11	METAL CHIP	22	0.50% 1/16W	R5009	1-218-933-11	RES-CHIP	22	5% 1/16W
R4865	1-218-945-11	RES-CHIP	220	5% 1/16W					
R4866	1-218-990-81	SHORT CHIP	0		R5010	1-218-990-81	SHORT CHIP	0	
R4867	1-208-663-11	METAL CHIP	150	0.50% 1/16W	R5011	1-218-933-11	RES-CHIP	22	5% 1/16W
R4868	1-208-635-11	METAL CHIP	10	0.50% 1/16W	R5012	1-218-990-81	SHORT CHIP	0	
					R5013	1-218-937-11	RES-CHIP	47	5% 1/16W
R4869	1-218-945-11	RES-CHIP	220	5% 1/16W	R5014	1-218-937-11	RES-CHIP	47	5% 1/16W
R4870	1-218-953-11	RES-CHIP	1K	5% 1/16W					
R4874	1-218-945-11	RES-CHIP	220	5% 1/16W	R5015	1-218-990-81	SHORT CHIP	0	
R4875	1-218-990-81	SHORT CHIP	0		R5016	1-218-969-11	RES-CHIP	22K	5% 1/16W
R4876	1-208-663-11	METAL CHIP	150	0.50% 1/16W	R5017	1-218-985-11	RES-CHIP	470K	5% 1/16W
					R5018	1-218-933-11	RES-CHIP	22	5% 1/16W
R4877	1-208-635-11	METAL CHIP	10	0.50% 1/16W	R5019	1-218-945-11	RES-CHIP	220	5% 1/16W
R4878	1-218-945-11	RES-CHIP	220	5% 1/16W					
R4879	1-208-911-11	METAL CHIP	10K	0.50% 1/16W	R5021	1-218-945-11	RES-CHIP	220	5% 1/16W
R4880	1-208-683-11	METAL CHIP	1K	0.50% 1/16W	R5022	1-218-947-11	RES-CHIP	330	5% 1/16W
R4881	1-218-941-11	RES-CHIP	100	5% 1/16W	R5024	1-218-990-81	SHORT CHIP	0	
					R5025	1-218-990-81	SHORT CHIP	0	
R4882	1-218-941-81	RES-CHIP	100	5% 1/16W	R5026	1-208-893-11	METAL CHIP	1.8K	0.50% 1/16W
R4883	1-218-941-81	RES-CHIP	100	5% 1/16W					
R4884	1-218-941-81	RES-CHIP	100	5% 1/16W	R5027	1-218-985-11	RES-CHIP	470K	5% 1/16W
R4885	1-218-941-81	RES-CHIP	100	5% 1/16W	R5032	1-216-864-11	SHORT CHIP	0	
R4886	1-218-941-81	RES-CHIP	100	5% 1/16W	R5033	1-216-864-11	SHORT CHIP	0	
					R5034	1-216-864-11	SHORT CHIP	0	
R4887	1-218-941-81	RES-CHIP	100	5% 1/16W	R5035	1-216-864-11	SHORT CHIP	0	
R4888	1-218-941-81	RES-CHIP	100	5% 1/16W					
R4889	1-218-941-81	RES-CHIP	100	5% 1/16W	R5036	1-218-969-11	RES-CHIP	22K	5% 1/16W
R4890	1-218-855-11	METAL CHIP	2.2K	0.50% 1/10W	R5038	1-208-695-11	METAL CHIP	3.3K	0.50% 1/16W
R4891	1-218-855-11	METAL CHIP	2.2K	0.50% 1/10W	R5039	1-218-990-81	SHORT CHIP	0	
					R5041	1-218-990-81	SHORT CHIP	0	
R4892	1-218-965-11	RES-CHIP	10K	5% 1/16W	R5108	1-218-969-11	RES-CHIP	22K	5% 1/16W
R4893	1-218-965-11	RES-CHIP	10K	5% 1/16W					
R4894	1-208-695-11	METAL CHIP	3.3K	0.50% 1/16W	R5109	1-218-969-11	RES-CHIP	22K	5% 1/16W
R4895	1-218-990-81	SHORT CHIP	0		R5110	1-218-969-11	RES-CHIP	22K	5% 1/16W
R4898	1-208-885-11	METAL CHIP	820	0.50% 1/16W	R5111	1-218-990-81	SHORT CHIP	0	
					R5112	1-218-990-81	SHORT CHIP	0	
R4902	1-218-990-81	SHORT CHIP	0		R5114	1-218-990-81	SHORT CHIP	0	
R4903	1-218-935-11	RES-CHIP	33	5% 1/16W					
R4907	1-218-941-81	RES-CHIP	100	5% 1/16W	R5115	1-218-949-11	RES-CHIP	470	5% 1/16W
R4908	1-218-941-81	RES-CHIP	100	5% 1/16W	R5116	1-218-973-11	RES-CHIP	47K	5% 1/16W
R4909	1-218-941-81	RES-CHIP	100	5% 1/16W	R5119	1-218-990-81	SHORT CHIP	0	
					R5120	1-216-864-11	SHORT CHIP	0	
R4912	1-218-990-81	SHORT CHIP	0		R5122	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4914	1-218-990-81	SHORT CHIP	0						
R4915	1-218-990-81	SHORT CHIP	0		R5123	1-218-990-81	SHORT CHIP	0	
R4921	1-218-953-11	RES-CHIP	1K	5% 1/16W	R5124	1-218-990-81	SHORT CHIP	0	
R4922	1-208-677-11	METAL CHIP	560	0.50% 1/16W	R5126	1-218-990-81	SHORT CHIP	0	
					R5127	1-208-893-11	METAL CHIP	1.8K	0.50% 1/16W
R4923	1-218-990-81	SHORT CHIP	0		R5128	1-218-849-11	METAL CHIP	1.2K	0.50% 1/10W
R4924	1-208-703-11	METAL CHIP	6.8K	0.50% 1/16W					
R4925	1-218-929-11	RES-CHIP	10	5% 1/16W	R5129	1-218-935-11	RES-CHIP	33	5% 1/16W
R4927	1-218-990-81	SHORT CHIP	0		R5130	1-208-677-11	METAL CHIP	560	0.50% 1/16W
R4928	1-218-990-81	SHORT CHIP	0		R5132	1-218-935-11	RES-CHIP	33	5% 1/16W
					R5137	1-218-990-81	SHORT CHIP	0	
R4929	1-218-990-81	SHORT CHIP	0		R5138	1-218-990-81	SHORT CHIP	0	
R4932	1-218-937-11	RES-CHIP	47	5% 1/16W					
R4933	1-218-990-81	SHORT CHIP	0		R5140	1-218-965-11	RES-CHIP	10K	5% 1/16W
R4934	1-218-990-81	SHORT CHIP	0		R5142	1-218-941-81	RES-CHIP	100	5% 1/16W
R4935	1-218-965-11	RES-CHIP	10K	5% 1/16W	R5143	1-218-990-81	SHORT CHIP	0	
					R5144	1-218-937-11	RES-CHIP	47	5% 1/16W



REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK		
R5145	1-218-937-11	RES-CHIP	47	5%	1/16W	R5245	1-218-965-11	RES-CHIP	10K 5%	1/16W	
R5146	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5250	1-216-864-11	SHORT CHIP	0		
R5147	1-218-935-11	RES-CHIP	33	5%	1/16W	R5300	1-218-933-11	RES-CHIP	22	5%	1/16W
R5148	1-218-990-81	SHORT CHIP	0			R5301	1-218-990-81	SHORT CHIP	0		
R5149	1-218-990-81	SHORT CHIP	0			R5302	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5151	1-218-990-81	SHORT CHIP	0			R5303	1-218-933-11	RES-CHIP	22	5%	1/16W
R5152	1-218-990-81	SHORT CHIP	0			R5304	1-218-933-11	RES-CHIP	22	5%	1/16W
R5155	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5305	1-218-990-81	SHORT CHIP	0		
R5156	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5307	1-218-933-11	RES-CHIP	22	5%	1/16W
R5157	1-218-937-11	RES-CHIP	47	5%	1/16W	R5308	1-218-933-11	RES-CHIP	22	5%	1/16W
R5158	1-218-937-11	RES-CHIP	47	5%	1/16W	R5309	1-218-933-11	RES-CHIP	22	5%	1/16W
R5159	1-218-937-11	RES-CHIP	47	5%	1/16W	R5310	1-218-933-11	RES-CHIP	22	5%	1/16W
R5160	1-218-937-11	RES-CHIP	47	5%	1/16W	R5311	1-218-933-11	RES-CHIP	22	5%	1/16W
R5164	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5312	1-218-933-11	RES-CHIP	22	5%	1/16W
R5165	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5313	1-218-965-11	RES-CHIP	10K	5%	1/16W
R5166	1-218-935-11	RES-CHIP	33	5%	1/16W	R5315	1-218-933-11	RES-CHIP	22	5%	1/16W
R5167	1-218-933-11	RES-CHIP	22	5%	1/16W	R5316	1-218-933-11	RES-CHIP	22	5%	1/16W
R5168	1-218-935-11	RES-CHIP	33	5%	1/16W	R5318	1-218-933-11	RES-CHIP	22	5%	1/16W
R5169	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5319	1-218-933-11	RES-CHIP	22	5%	1/16W
R5170	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5320	1-218-933-11	RES-CHIP	22	5%	1/16W
R5171	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5321	1-218-933-11	RES-CHIP	22	5%	1/16W
R5172	1-218-969-11	RES-CHIP	22K	5%	1/16W	R5322	1-218-933-11	RES-CHIP	22	5%	1/16W
R5173	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5323	1-218-933-11	RES-CHIP	22	5%	1/16W
R5174	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5324	1-218-933-11	RES-CHIP	22	5%	1/16W
R5178	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5325	1-218-937-11	RES-CHIP	47	5%	1/16W
R5179	1-218-977-11	RES-CHIP	100K	5%	1/16W	R5326	1-218-937-11	RES-CHIP	47	5%	1/16W
R5180	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R5327	1-218-937-11	RES-CHIP	47	5%	1/16W
R5181	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5328	1-218-937-11	RES-CHIP	47	5%	1/16W
R5182	1-218-929-11	RES-CHIP	10	5%	1/16W	R5329	1-218-937-11	RES-CHIP	47	5%	1/16W
R5183	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5330	1-218-937-11	RES-CHIP	47	5%	1/16W
R5184	1-218-990-81	SHORT CHIP	0			R5331	1-218-937-11	RES-CHIP	47	5%	1/16W
R5185	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5332	1-218-937-11	RES-CHIP	47	5%	1/16W
R5188	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5333	1-218-990-81	SHORT CHIP	0		
R5189	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5334	1-218-933-11	RES-CHIP	22	5%	1/16W
R5190	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5335	1-218-933-11	RES-CHIP	22	5%	1/16W
R5193	1-218-935-11	RES-CHIP	33	5%	1/16W	R5336	1-218-933-11	RES-CHIP	22	5%	1/16W
R5194	1-218-935-11	RES-CHIP	33	5%	1/16W	R5337	1-218-933-11	RES-CHIP	22	5%	1/16W
R5195	1-218-937-11	RES-CHIP	47	5%	1/16W	R5339	1-216-295-91	SHORT CHIP	0		
R5196	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5340	1-218-933-11	RES-CHIP	22	5%	1/16W
R5197	1-218-973-11	RES-CHIP	47K	5%	1/16W	R5341	1-218-933-11	RES-CHIP	22	5%	1/16W
R5201	1-218-953-11	RES-CHIP	1K	5%	1/16W	R5342	1-218-933-11	RES-CHIP	22	5%	1/16W
R5202	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5343	1-218-937-11	RES-CHIP	47	5%	1/16W
R5203	1-218-941-81	RES-CHIP	100	5%	1/16W	R5344	1-218-933-11	RES-CHIP	22	5%	1/16W
R5204	1-218-990-81	SHORT CHIP	0			R5345	1-218-937-11	RES-CHIP	47	5%	1/16W
R5205	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5346	1-218-937-11	RES-CHIP	47	5%	1/16W
R5206	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5347	1-218-937-11	RES-CHIP	47	5%	1/16W
R5207	1-218-945-11	RES-CHIP	220	5%	1/16W	R5348	1-218-937-11	RES-CHIP	47	5%	1/16W
R5208	1-218-990-81	SHORT CHIP	0			R5349	1-218-937-11	RES-CHIP	47	5%	1/16W
R5209	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5350	1-218-937-11	RES-CHIP	47	5%	1/16W
R5212	1-218-990-81	SHORT CHIP	0			R5351	1-218-937-11	RES-CHIP	47	5%	1/16W
R5213	1-218-937-11	RES-CHIP	47	5%	1/16W	R5352	1-218-937-11	RES-CHIP	47	5%	1/16W
R5214	1-218-937-11	RES-CHIP	47	5%	1/16W	R5353	1-218-937-11	RES-CHIP	47	5%	1/16W
R5215	1-218-969-11	RES-CHIP	22K	5%	1/16W	R5354	1-218-937-11	RES-CHIP	47	5%	1/16W
R5216	1-218-969-11	RES-CHIP	22K	5%	1/16W	R5355	1-218-937-11	RES-CHIP	47	5%	1/16W
R5217	1-218-969-11	RES-CHIP	22K	5%	1/16W	R5356	1-218-990-81	SHORT CHIP	0		
R5218	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5357	1-218-933-11	RES-CHIP	22	5%	1/16W
R5219	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5358	1-218-933-11	RES-CHIP	22	5%	1/16W
R5220	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5400	1-218-933-11	RES-CHIP	22	5%	1/16W
R5221	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5401	1-218-939-11	RES-CHIP	68	5%	1/16W
R5241	1-218-941-81	RES-CHIP	100	5%	1/16W	R5402	1-218-933-11	RES-CHIP	22	5%	1/16W
R5242	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5403	1-218-933-11	RES-CHIP	22	5%	1/16W
R5243	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5404	1-218-933-11	RES-CHIP	22	5%	1/16W
R5244	1-218-965-11	RES-CHIP	10K	5%	1/16W	R5405	1-218-965-11	RES-CHIP	10K	5%	1/16W

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R5406	1-218-965-11	RES-CHIP	10K 5%	1/16W	RB5117	1-234-881-21	RES, CHIP NETWORK 22KX8 (3816)
R5407	1-218-965-11	RES-CHIP	10K 5%	1/16W	RB5118	1-234-881-21	RES, CHIP NETWORK 22KX8 (3816)
R5412	1-218-965-11	RES-CHIP	10K 5%	1/16W	RB5119	1-234-881-21	RES, CHIP NETWORK 22KX8 (3816)
R5413	1-218-947-11	RES-CHIP	330 5%	1/16W	RB5120	1-234-785-21	RES, CHIP NETWORK 100X8 (3816)
R5415	1-218-990-81	SHORT CHIP	0		RB5300	1-234-943-21	RES, NETWORK 22 (1005X4)
R5417	1-218-933-11	RES-CHIP	22 5%	1/16W	RB5301	1-234-711-21	RES, CHIP NETWORK 22X8 (3816)
R5418	1-218-933-11	RES-CHIP	22 5%	1/16W	RB5302	1-234-711-21	RES, CHIP NETWORK 22X8 (3816)
R5424	1-218-965-11	RES-CHIP	10K 5%	1/16W	RB5303	1-234-711-21	RES, CHIP NETWORK 22X8 (3816)
R5425	1-218-990-81	SHORT CHIP	0		RB5304	1-234-943-21	RES, NETWORK 22 (1005X4)
R5426	1-218-990-81	SHORT CHIP	0		RB5305	1-234-943-21	RES, NETWORK 22 (1005X4)
R5427	1-218-990-81	SHORT CHIP	0		RB5306	1-234-943-21	RES, NETWORK 22 (1005X4)
R5431	1-218-990-81	SHORT CHIP	0		RB5307	1-234-943-21	RES, NETWORK 22 (1005X4)
R5432	1-218-933-11	RES-CHIP	22 5%	1/16W	RB5308	1-234-943-21	RES, NETWORK 22 (1005X4)
R5433	1-218-937-11	RES-CHIP	47 5%	1/16W	RB5309	1-234-943-21	RES, NETWORK 22 (1005X4)
R5912	1-218-990-81	SHORT CHIP	0		RB5310	1-234-943-21	RES, NETWORK 22 (1005X4)
R5913	1-218-990-81	SHORT CHIP	0		RB5311	1-234-711-21	RES, CHIP NETWORK 22X8 (3816)
R5915	1-218-990-81	SHORT CHIP	0		RB5312	1-234-943-21	RES, NETWORK 22 (1005X4)
R5918	1-218-990-81	SHORT CHIP	0		RB5313	1-234-378-11	RES, CHIP NETWORK 10KX4 (1005X4)
R5919	1-218-990-81	SHORT CHIP	0		RB5314	1-234-378-11	RES, CHIP NETWORK 10KX4 (1005X4)
R5920	1-218-990-81	SHORT CHIP	0		RB5315	1-234-943-21	RES, NETWORK 22 (1005X4)
R5923	1-218-937-11	RES-CHIP	47 5%	1/16W	RB5316	1-234-943-21	RES, NETWORK 22 (1005X4)
R5924	1-218-939-11	RES-CHIP	68 5%	1/16W	RB5317	1-234-943-21	RES, NETWORK 22 (1005X4)
R5925	1-218-941-81	RES-CHIP	100 5%	1/16W	RB5321	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
< NETWORK RESISTOR >							
RB4201	1-234-799-21	RES, CHIP NETWORK 10KX8 (3816)			RB5322	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB4203	1-234-711-21	RES, CHIP NETWORK 22X8 (3816)			RB5324	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4205	1-234-887-21	RES, CHIP NETWORK 0X8 (3816)			RB5327	1-234-943-21	RES, NETWORK 22 (1005X4)
RB4206	1-234-887-21	RES, CHIP NETWORK 0X8 (3816)			RB5328	1-234-943-21	RES, NETWORK 22 (1005X4)
RB4207	1-234-887-21	RES, CHIP NETWORK 0X8 (3816)			RB5330	1-234-943-21	RES, NETWORK 22 (1005X4)
RB4208	1-234-887-21	RES, CHIP NETWORK 0X8 (3816)			RB5331	1-234-943-21	RES, NETWORK 22 (1005X4)
RB4212	1-234-799-21	RES, CHIP NETWORK 10KX8 (3816)			RB5333	1-234-943-21	RES, NETWORK 22 (1005X4)
RB4500	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)			RB5334	1-234-943-21	RES, NETWORK 22 (1005X4)
RB4501	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)			RB5335	1-234-943-21	RES, NETWORK 22 (1005X4)
RB4502	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)			RB5336	1-234-943-21	RES, NETWORK 22 (1005X4)
RB4503	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)			RB5337	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4504	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)			RB5338	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4804	1-234-378-11	RES, CHIP NETWORK 10KX4 (1005X4)			RB5339	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4805	1-234-945-21	RES, NETWORK 100 (1005X4)			RB5340	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4806	1-234-945-21	RES, NETWORK 100 (1005X4)			RB5341	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4807	1-234-945-21	RES, NETWORK 100 (1005X4)			RB5342	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4808	1-234-945-21	RES, NETWORK 100 (1005X4)			RB5343	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4809	1-234-945-21	RES, NETWORK 100 (1005X4)			RB5344	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4810	1-234-945-21	RES, NETWORK 100 (1005X4)			RB5345	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4811	1-234-945-21	RES, NETWORK 100 (1005X4)			RB5346	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4812	1-234-711-21	RES, CHIP NETWORK 22X8 (3816)			RB5347	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4813	1-234-711-21	RES, CHIP NETWORK 22X8 (3816)			RB5348	1-234-944-21	RES, NETWORK 47 (1005X4)
RB4814	1-234-711-21	RES, CHIP NETWORK 22X8 (3816)			RB5349	1-234-944-21	RES, NETWORK 47 (1005X4)
RB5000	1-234-946-21	RES, NETWORK 220 (1005X4)			RB5350	1-234-944-21	RES, NETWORK 47 (1005X4)
RB5001	1-234-946-21	RES, NETWORK 220 (1005X4)			RB5351	1-234-944-21	RES, NETWORK 47 (1005X4)
RB5002	1-234-785-21	RES, CHIP NETWORK 100X8 (3816)			RB5352	1-234-944-21	RES, NETWORK 47 (1005X4)
RB5003	1-234-946-21	RES, NETWORK 220 (1005X4)			RB5417	1-234-785-21	RES, CHIP NETWORK 100X8 (3816)
RB5004	1-234-785-21	RES, CHIP NETWORK 100X8 (3816)			RB5418	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB5005	1-234-946-21	RES, NETWORK 220 (1005X4)			RB5419	1-234-785-21	RES, CHIP NETWORK 100X8 (3816)
RB5006	1-234-946-21	RES, NETWORK 220 (1005X4)			RB5420	1-234-785-21	RES, CHIP NETWORK 100X8 (3816)
RB5007	1-234-946-21	RES, NETWORK 220 (1005X4)			RB5900	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB5008	1-234-946-21	RES, NETWORK 220 (1005X4)			RB5901	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB5009	1-234-946-21	RES, NETWORK 220 (1005X4)			RB5902	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB5108	1-234-881-21	RES, CHIP NETWORK 22KX8 (3816)			RB5903	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB5109	1-234-881-21	RES, CHIP NETWORK 22KX8 (3816)			RB5904	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB5114	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)			RB5905	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB5115	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)			RB5906	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)
RB5116	1-234-881-21	RES, CHIP NETWORK 22KX8 (3816)			RB5907	1-234-710-21	RES, CHIP NETWORK 47X8 (3816)



REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
		< VARISTOR >		C2102	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VD4501	1-805-774-21	VARISTOR, CHIP		C2103	1-100-909-11	CERAMIC CHIP 10μF 10%	6.3V
VD4502	1-805-774-21	VARISTOR, CHIP		C2106	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VD4504	1-805-774-21	VARISTOR, CHIP		C2108	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VD4505	1-805-774-21	VARISTOR, CHIP		C2111	1-100-916-11	CERAMIC CHIP 0.1μF 10%	16V
VDR001	1-802-160-11	VARISTOR		C2112	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VDR002	1-802-160-11	VARISTOR		C2114	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VDR003	1-802-160-11	VARISTOR		C2116	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VDR004	1-802-160-11	VARISTOR		C2119	1-100-916-11	CERAMIC CHIP 0.1μF 10%	16V
VDR005	1-802-160-11	VARISTOR		C2120	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VDR006	1-802-160-11	VARISTOR		C2121	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VDR007	1-802-160-11	VARISTOR		C2122	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
VDR008	1-802-160-11	VARISTOR		C2123	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
		< VIBRATOR >		C2125	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
X4800	1-813-373-11	OSCILLATOR, CRYSTAL		C2127	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
X5100	1-813-528-11	VIBRATOR, CRYSTAL 27MHZ		C2201	1-100-916-11	CERAMIC CHIP 0.1μF 10%	16V
*****				C2202	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
		C BOARD, COMPLETE		C2203	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
		*****		C2204	1-100-916-11	CERAMIC CHIP 0.1μF 10%	16V
		(Included in Optics Block Ass'y)		C2205	1-112-780-11	CERAMIC CHIP 0.47μF 10%	16V
		< CAPACITOR >		C2206	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2004	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V	C2207	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2005	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V	C2208	1-126-401-21	ELECT CHIP 1μF 20%	50V
C2007	1-100-631-21	ELECT CHIP 82μF 20%	20V	C2209	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2008	1-165-673-21	ELECT CHIP 56μF 20%	10V	C2210	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2009	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V	C2211	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2010	1-100-911-11	CERAMIC CHIP 4.7μF 10%	25V	C2212	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2011	1-165-673-21	ELECT CHIP 56μF 20%	10V	C2213	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2012	1-100-916-11	CERAMIC CHIP 0.1μF 10%	16V	C2214	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2013	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V	C2215	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2016	1-165-671-21	ELECT CHIP 470μF 20%	6.3V	C2216	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2017	1-100-581-81	CERAMIC CHIP 4700pF 10%	50V	C2217	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2019	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V	C2218	1-126-391-11	ELECT CHIP 47μF 20%	6.3V
C2020	1-100-390-21	ELECT CHIP 180μF 20%	6.3V	C2219	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2021	1-100-911-11	CERAMIC CHIP 4.7μF 10%	25V	C2220	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2022	1-100-911-11	CERAMIC CHIP 4.7μF 10%	25V	C2221	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2023	1-100-911-11	CERAMIC CHIP 4.7μF 10%	25V	C2222	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2024	1-100-912-11	CERAMIC CHIP 1μF 10%	25V	C2223	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2025	1-100-911-11	CERAMIC CHIP 4.7μF 10%	25V	C2224	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2026	1-164-878-11	CERAMIC CHIP 150pF 5%	50V	C2225	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2028	1-162-969-11	CERAMIC CHIP 0.0068μF 10%	25V	C2226	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2029	1-112-066-11	CERAMIC CHIP 10μF 10%	10V	C2227	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2030	1-100-911-11	CERAMIC CHIP 4.7μF 10%	25V	C2228	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2032	1-100-390-21	ELECT CHIP 180μF 20%	6.3V	C2229	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2033	1-164-874-11	CERAMIC CHIP 100pF 5%	50V	C2230	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2034	1-100-912-11	CERAMIC CHIP 1μF 10%	25V	C2231	1-112-467-21	ELECT CHIP 560μF 20%	4V
C2035	1-100-390-21	ELECT CHIP 180μF 20%	6.3V	C2232	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2036	1-100-766-21	ELECT CHIP 47μF 20%	16V	C2234	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2037	1-100-912-11	CERAMIC CHIP 1μF 10%	25V	C2235	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2039	1-100-916-11	CERAMIC CHIP 0.1μF 10%	16V	C2236	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2040	1-100-912-11	CERAMIC CHIP 1μF 10%	25V	C2237	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2041	1-164-874-11	CERAMIC CHIP 100pF 5%	50V	C2238	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2042	1-112-778-11	CERAMIC CHIP 0.022μF 10%	25V	C2239	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2043	1-112-776-11	CERAMIC CHIP 0.0047μF 10%	50V	C2240	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2045	1-112-066-11	CERAMIC CHIP 10μF 10%	10V	C2241	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2046	1-112-692-11	CERAMIC CHIP 1000pF 5%	50V	C2242	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2047	1-112-692-11	CERAMIC CHIP 1000pF 5%	50V	C2243	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2048	1-100-912-11	CERAMIC CHIP 1μF 10%	25V	C2244	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2049	1-100-912-11	CERAMIC CHIP 1μF 10%	25V	C2245	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
C2100	1-100-909-11	CERAMIC CHIP 10μF 10%	6.3V	C2246	1-112-467-21	ELECT CHIP 560μF 20%	4V
				C2247	1-100-909-11	CERAMIC CHIP 10μF 10%	6.3V
				C2248	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V
				C2249	1-112-777-11	CERAMIC CHIP 0.01μF 10%	25V







C

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
C2910	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V			< FERRITE BEAD >	
C2911	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V				
C2917	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2918	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2971	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2972	1-164-882-11	CERAMIC CHIP	220pF 5% 16V				
C2973	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2974	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2975	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2976	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2977	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2978	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2979	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
C2980	1-112-777-11	CERAMIC CHIP	0.01μF 10% 25V				
		< CONNECTOR >					
CN2101*	1-819-564-11	HEADER ASSEMBLY FOR PWB 41P					
		< DIODE >					
D2000	6-501-336-01	DIODE RSX201L-30TE25					
D2001	6-500-294-01	DIODE PTZ-TE25-3.9B					
D2002	8-719-078-21	DIODE SML-310PTT86					
D2003	8-719-078-04	DIODE EC31QS03L-TE12L					
D2004	8-719-071-34	DIODE RB521S-30-TE61					
D2005	8-719-078-04	DIODE EC31QS03L-TE12L					
D2006	6-500-294-01	DIODE PTZ-TE25-3.9B					
D2007	6-500-294-01	DIODE PTZ-TE25-3.9B					
D2008	8-719-053-08	DIODE SML-310DTT86					
D2009	8-719-071-34	DIODE RB521S-30-TE61					
D2600	8-719-081-97	DIODE MMDL914T1					
D2602	8-719-081-97	DIODE MMDL914T1					
D2700	8-719-081-97	DIODE MMDL914T1					
D2701	8-719-081-97	DIODE MMDL914T1					
D2800	8-719-081-97	DIODE MMDL914T1					
D2801	8-719-081-97	DIODE MMDL914T1					
D2900	6-500-600-01	DIODE MM3Z3V3T1					
D2901	6-500-697-01	DIODE UDZSTE-173.3B					
		< SHIELD CLIP >					
ET2000	1-780-148-11	CLIP, SHIELD					
ET2001	1-780-148-11	CLIP, SHIELD					
ET2002	1-780-148-11	CLIP, SHIELD					
ET2003	1-780-148-11	CLIP, SHIELD					
ET2004	1-780-148-11	CLIP, SHIELD					
ET2005	1-780-148-11	CLIP, SHIELD					
ET2006	1-780-148-11	CLIP, SHIELD					
ET2007	1-780-148-11	CLIP, SHIELD					
ET2008	1-780-148-11	CLIP, SHIELD					
ET2009	1-780-148-11	CLIP, SHIELD					
ET2010	1-780-148-11	CLIP, SHIELD					
ET2011	1-780-148-11	CLIP, SHIELD					
		< FUSE >					
F2000	1-576-415-11	FUSE	2A 32V				
F2001	1-576-603-21	FUSE	3.15A 24V				
FB2000	1-469-083-21	FERRITE	0μH				
FB2001	1-469-083-21	FERRITE	0μH				
FB2002	1-469-083-21	FERRITE	0μH				
FB2004	1-469-083-21	FERRITE	0μH				
FB2005	1-469-083-21	FERRITE	0μH				
FB2006	1-469-083-21	FERRITE	0μH				
FB2008	1-469-083-21	FERRITE	0μH				
FB2010	1-469-083-21	FERRITE	0μH				
FB2011	1-469-083-21	FERRITE	0μH				
FB2015 *	1-469-230-21	FERRITE	0μH				
FB2016 *	1-469-230-21	FERRITE	0μH				
FB2017	1-469-979-21	FERRITE	0μH				
FB2018	1-469-979-21	FERRITE	0μH				
FB2200	1-414-921-11	FERRITE	0μH				
FB2201	1-414-921-11	FERRITE	0μH				
FB2202	1-414-921-11	FERRITE	0μH				
FB2300	1-414-921-11	FERRITE	0μH				
FB2301	1-414-921-11	FERRITE	0μH				
FB2302	1-414-921-11	FERRITE	0μH				
FB2303	1-414-921-11	FERRITE	0μH				
FB2400	1-469-379-11	FERRITE	0μH				
FB2401	1-400-382-11	FERRITE	0μH				
FB2402	1-400-382-11	FERRITE	0μH				
FB2500	1-400-382-11	FERRITE	0μH				
FB2501	1-469-379-11	FERRITE	0μH				
FB2502	1-400-382-11	FERRITE	0μH				
FB2802	1-414-921-11	FERRITE	0μH				
		< IC >					
IC2000	6-706-815-01	IC TMP75AIDR					
IC2001	6-704-407-01	IC PQ1CZ41H2ZPH					
IC2002	6-704-573-01	IC M24C32-WMN6T(B)					
IC2003	6-708-762-01	IC PQ200WNA1ZPH					
IC2004	6-706-884-01	IC BD9851EFV-E2					
IC2005 *	6-708-796-01	IC S-1200B50-M5T1G					
IC2200	6-702-985-01	IC M24256-BWMN6T					
IC2201	6-703-225-01	IC S-80928CNMC-G8YT2G					
IC2202	6-707-853-01	IC TC74LCX541FT(EKJ)					
IC2301	6-702-985-01	IC M24256-BWMN6T					
IC2302	6-707-853-01	IC TC74LCX541FT(EKJ)					
IC2400	6-706-784-01	IC HY5DU283222AFP-36					
IC2402	6-707-373-01	IC TPS51100DGQR					
IC2501	6-706-784-01	IC HY5DU283222AFP-36					
IC2502	6-707-373-01	IC TPS51100DGQR					
IC2600	8-753-255-59	IC CXA7007R-T6					
IC2601	8-753-255-59	IC CXA7007R-T6					
IC2602	6-705-025-01	IC PQ20WZ1UJ00H					
IC2603	8-759-066-55	IC TA75W393FU					
IC2604	6-701-841-01	IC PST3628UL					
IC2605	6-701-841-01	IC PST3628UL					
IC2700	8-753-255-59	IC CXA7007R-T6					
IC2701	8-753-255-59	IC CXA7007R-T6					
IC2702	6-705-025-01	IC PQ20WZ1UJ00H					
IC2703	6-701-841-01	IC PST3628UL					
IC2704	6-701-841-01	IC PST3628UL					
IC2800	8-753-255-59	IC CXA7007R-T6					
IC2801	8-753-255-59	IC CXA7007R-T6					
IC2802	6-705-025-01	IC PQ20WZ1UJ00H					
IC2803	6-701-841-01	IC PST3628UL					
IC2804	6-701-841-01	IC PST3628UL					
IC2900	8-759-337-40	IC NJM2904V(Te2)					

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
IC2901	8-759-646-99	IC NJM4556AV(TE2)		Q2300	8-729-013-28	TRANSISTOR HN1B01FU-TE85R	
IC2902	8-759-337-40	IC NJM2904V(TE2)		Q2301	8-729-905-35	TRANSISTOR 2SC4081-R	
IC2972	8-759-596-36	IC SN74LV595APWR		Q2600	8-729-029-14	TRANSISTOR DTC144EUA-T106	
IC2973	6-703-527-01	IC SN74LVC2G157DCUR		Q2601	8-729-013-28	TRANSISTOR HN1B01FU-TE85R	
IC2974	6-703-527-01	IC SN74LVC2G157DCUR		Q2602	8-729-056-67	TRANSISTOR SSM6P05FU(TE85R)	
IC2975	6-703-527-01	IC SN74LVC2G157DCUR		Q2603	8-729-013-28	TRANSISTOR HN1B01FU-TE85R	
IC2976	6-703-527-01	IC SN74LVC2G157DCUR		Q2604	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	
IC2977	6-703-527-01	IC SN74LVC2G157DCUR		Q2605	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
IC2978	6-703-527-01	IC SN74LVC2G157DCUR		Q2606	8-729-029-14	TRANSISTOR DTC144EUA-T106	
IC2979	6-701-189-01	IC MC74VHC1GU04DFT1		Q2607	8-729-905-35	TRANSISTOR 2SC4081-R	
		< COIL >		Q2608	8-729-427-72	TRANSISTOR XP4501	
L2000	1-416-606-11	INDUCTOR 47μH		Q2700	8-729-029-14	TRANSISTOR DTC144EUA-T106	
L2001	1-416-344-11	INDUCTOR 10μH		Q2701	8-729-013-28	TRANSISTOR HN1B01FU-TE85R	
L2002	1-409-527-41	INDUCTOR 4.7μH		Q2702	8-729-056-67	TRANSISTOR SSM6P05FU(TE85R)	
L2003	1-424-922-21	INDUCTOR 10μH		Q2703	8-729-013-28	TRANSISTOR HN1B01FU-TE85R	
L2004	1-469-551-21	INDUCTOR 2.2μH		Q2705	8-729-427-72	TRANSISTOR XP4501	
L2005	1-469-551-21	INDUCTOR 2.2μH		Q2800	8-729-029-14	TRANSISTOR DTC144EUA-T106	
L2006	1-400-179-21	FERRITE 0μH		Q2801	8-729-013-28	TRANSISTOR HN1B01FU-TE85R	
L2007	1-400-179-21	FERRITE 0μH		Q2802	8-729-056-67	TRANSISTOR SSM6P05FU(TE85R)	
L2100	1-469-551-21	INDUCTOR 2.2μH		Q2803	8-729-013-28	TRANSISTOR HN1B01FU-TE85R	
L2101	1-469-551-21	INDUCTOR 2.2μH		Q2805	8-729-427-72	TRANSISTOR XP4501	
L2200	1-412-054-21	INDUCTOR 2.2μH		Q2900	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
L2201	1-412-054-21	INDUCTOR 2.2μH				< RESISTOR >	
L2202	1-412-054-21	INDUCTOR 2.2μH		R2000	1-218-933-11	RES-CHIP 22 5% 1/16W	
L2300	1-412-054-21	INDUCTOR 2.2μH		R2001	1-218-965-11	RES-CHIP 10K 5% 1/16W	
L2301	1-412-054-21	INDUCTOR 2.2μH		R2002	1-218-933-11	RES-CHIP 22 5% 1/16W	
L2302	1-412-054-21	INDUCTOR 2.2μH		R2003	1-218-965-11	RES-CHIP 10K 5% 1/16W	
L2401	1-412-054-21	INDUCTOR 2.2μH		R2004	1-218-969-11	RES-CHIP 22K 5% 1/16W	
L2501	1-412-054-21	INDUCTOR 2.2μH		R2005	1-218-969-11	RES-CHIP 22K 5% 1/16W	
L2601	1-469-551-21	INDUCTOR 2.2μH		R2006	1-218-969-11	RES-CHIP 22K 5% 1/16W	
L2603	1-469-551-21	INDUCTOR 2.2μH		R2007	1-218-969-11	RES-CHIP 22K 5% 1/16W	
L2604	1-469-551-21	INDUCTOR 2.2μH		R2008	1-218-933-11	RES-CHIP 22 5% 1/16W	
L2605	1-469-551-21	INDUCTOR 2.2μH		R2009	1-218-933-11	RES-CHIP 22 5% 1/16W	
L2606	1-469-551-21	INDUCTOR 2.2μH		R2010	1-218-933-11	RES-CHIP 22 5% 1/16W	
L2607	1-469-551-21	INDUCTOR 2.2μH		R2011	1-218-990-81	SHORT CHIP 0	
L2701	1-469-551-21	INDUCTOR 2.2μH		R2012	1-218-965-11	RES-CHIP 10K 5% 1/16W	
L2703	1-469-551-21	INDUCTOR 2.2μH		R2013	1-218-990-81	SHORT CHIP 0	
L2704	1-469-551-21	INDUCTOR 2.2μH		R2015	1-218-953-11	RES-CHIP 1K 5% 1/16W	
L2705	1-469-551-21	INDUCTOR 2.2μH		R2016	1-218-953-11	RES-CHIP 1K 5% 1/16W	
L2706	1-469-551-21	INDUCTOR 2.2μH		R2017	1-218-953-11	RES-CHIP 1K 5% 1/16W	
L2707	1-469-551-21	INDUCTOR 2.2μH		R2018	1-208-687-11	METAL CHIP 1.5K 0.5% 1/16W	
L2801	1-469-551-21	INDUCTOR 2.2μH		R2019	1-208-683-11	METAL CHIP 1K 0.5% 1/16W	
L2803	1-469-551-21	INDUCTOR 2.2μH		R2020	1-218-945-11	RES-CHIP 220 5% 1/16W	
L2804	1-469-551-21	INDUCTOR 2.2μH		R2021	1-218-945-11	RES-CHIP 220 5% 1/16W	
L2805	1-469-551-21	INDUCTOR 2.2μH		R2022	1-218-965-11	RES-CHIP 10K 5% 1/16W	
L2806	1-469-551-21	INDUCTOR 2.2μH		R2023	1-218-965-11	RES-CHIP 10K 5% 1/16W	
L2970	1-469-551-21	INDUCTOR 2.2μH		R2024	1-218-990-81	SHORT CHIP 0	
		< TRANSISTOR >		R2025	1-218-973-11	RES-CHIP 47K 5% 1/16W	
Q2000	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2026	1-218-985-11	RES-CHIP 470K 5% 1/16W	
Q2001	8-729-905-35	TRANSISTOR 2SC4081-R		R2027	1-218-949-11	RES-CHIP 470 5% 1/16W	
Q2002	6-551-382-01	TRANSISTOR RSS040P03FD5TB		R2028	1-218-957-11	RES-CHIP 2.2K 5% 1/16W	
Q2003	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2033	1-218-973-11	RES-CHIP 47K 5% 1/16W	
Q2004	8-729-905-35	TRANSISTOR 2SC4081-R		R2034	1-218-990-81	SHORT CHIP 0	
Q2005	6-551-382-01	TRANSISTOR RSS040P03FD5TB		R2035	1-218-990-81	SHORT CHIP 0	
Q2006	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2036	1-208-709-11	METAL CHIP 12K 0.5% 1/16W	
Q2008	8-729-905-35	TRANSISTOR 2SC4081-R		R2037	1-208-711-11	METAL CHIP 15K 0.5% 1/16W	
Q2200	8-729-013-28	TRANSISTOR HN1B01FU-TE85R		R2038	1-208-711-11	METAL CHIP 15K 0.5% 1/16W	
Q2201	8-729-905-35	TRANSISTOR 2SC4081-R		R2039	1-208-927-11	METAL CHIP 47K 0.5% 1/16W	
Q2202	8-729-029-14	TRANSISTOR DTC144EUA-T106		R2040	1-208-911-11	METAL CHIP 10K 0.5% 1/16W	
				R2041	1-208-911-11	METAL CHIP 10K 0.5% 1/16W	
				R2042	1-208-699-11	METAL CHIP 4.7K 0.5% 1/16W	
				R2043	1-208-661-11	METAL CHIP 120 0.5% 1/16W	



C

REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK	
R2044	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R2218	1-218-929-11	RES-CHIP	10 5%	1/16W
R2045	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R2219	1-218-929-11	RES-CHIP	10 5%	1/16W
R2046	1-218-955-11	RES-CHIP	1.5K	5%	1/16W	R2220	1-218-933-11	RES-CHIP	22 5%	1/16W
R2047	1-218-990-81	SHORT CHIP	0			R2221	1-218-990-81	SHORT CHIP	0	
R2048	1-208-909-11	METAL CHIP	8.2K	0.5%	1/16W	R2222	1-218-990-81	SHORT CHIP	0	
R2049	1-208-931-11	METAL CHIP	68K	0.5%	1/16W	R2223	1-218-929-11	RES-CHIP	10 5%	1/16W
R2050	1-208-927-11	METAL CHIP	47K	0.5%	1/16W	R2226	1-218-929-11	RES-CHIP	10 5%	1/16W
R2051	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R2227	1-218-929-11	RES-CHIP	10 5%	1/16W
R2052	1-218-985-11	RES-CHIP	470K	5%	1/16W	R2228	1-218-929-11	RES-CHIP	10 5%	1/16W
R2054	1-218-953-11	RES-CHIP	1K	5%	1/16W	R2229	1-216-864-11	SHORT CHIP	0	
R2055	1-216-864-11	SHORT CHIP	0			R2230	1-218-959-11	RES-CHIP	3.3K 5%	1/16W
R2056	1-216-864-11	SHORT CHIP	0			R2231	1-218-961-11	RES-CHIP	4.7K 5%	1/16W
R2057	1-216-864-11	SHORT CHIP	0			R2232	1-218-937-11	RES-CHIP	47 5%	1/16W
R2100	1-218-941-11	METAL CHIP	100	5%	1/16W	R2233	1-218-961-11	RES-CHIP	4.7K 5%	1/16W
R2101	1-218-941-11	METAL CHIP	100	5%	1/16W	R2234	1-218-937-11	RES-CHIP	47 5%	1/16W
R2102	1-218-941-11	METAL CHIP	100	5%	1/16W	R2235	1-218-953-11	RES-CHIP	1K 5%	1/16W
R2103	1-218-941-11	METAL CHIP	100	5%	1/16W	R2236	1-218-953-11	RES-CHIP	1K 5%	1/16W
R2104	1-218-941-11	METAL CHIP	100	5%	1/16W	R2237	1-218-953-11	RES-CHIP	1K 5%	1/16W
R2105	1-218-941-11	METAL CHIP	100	5%	1/16W	R2238	1-218-929-11	RES-CHIP	10 5%	1/16W
R2109	1-218-937-11	RES-CHIP	47	5%	1/16W	R2239	1-218-929-11	RES-CHIP	10 5%	1/16W
R2110	1-218-937-11	RES-CHIP	47	5%	1/16W	R2240	1-218-929-11	RES-CHIP	10 5%	1/16W
R2111	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R2241	1-218-939-11	RES-CHIP	68 5%	1/16W
R2113	1-218-937-11	RES-CHIP	47	5%	1/16W	R2242	1-218-929-11	RES-CHIP	10 5%	1/16W
R2114	1-218-941-11	METAL CHIP	100	5%	1/16W	R2244	1-218-929-11	RES-CHIP	10 5%	1/16W
R2115	1-218-941-11	METAL CHIP	100	5%	1/16W	R2246	1-218-990-81	SHORT CHIP	0	
R2119	1-218-941-11	METAL CHIP	100	5%	1/16W	R2247	1-218-973-11	RES-CHIP	47K 5%	1/16W
R2120	1-218-941-11	METAL CHIP	100	5%	1/16W	R2248	1-218-953-11	RES-CHIP	1K 5%	1/16W
R2121	1-218-941-11	METAL CHIP	100	5%	1/16W	R2249	1-218-953-11	RES-CHIP	1K 5%	1/16W
R2122	1-218-941-11	METAL CHIP	100	5%	1/16W	R2250	1-218-969-11	RES-CHIP	22K 5%	1/16W
R2123	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R2251	1-218-941-81	RES-CHIP	100 5%	1/16W
R2124	1-218-977-11	RES-CHIP	100K	5%	1/16W	R2252	1-218-990-81	SHORT CHIP	0	
R2126	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R2253	1-218-969-11	RES-CHIP	22K 5%	1/16W
R2127	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R2254	1-218-965-11	RES-CHIP	10K 5%	1/16W
R2128	1-218-937-11	RES-CHIP	47	5%	1/16W	R2255	1-218-942-11	RES-CHIP	120 5%	1/16W
R2129	1-218-937-11	RES-CHIP	47	5%	1/16W	R2256	1-218-942-11	RES-CHIP	120 5%	1/16W
R2133	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R2257	1-218-929-11	RES-CHIP	10 5%	1/16W
R2134	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R2258	1-218-929-11	RES-CHIP	10 5%	1/16W
R2135	1-218-937-11	RES-CHIP	47	5%	1/16W	R2259	1-218-929-11	RES-CHIP	10 5%	1/16W
R2136	1-218-935-11	RES-CHIP	33	5%	1/16W	R2260	1-218-942-11	RES-CHIP	120 5%	1/16W
R2138	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2261	1-218-929-11	RES-CHIP	10 5%	1/16W
R2139	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2262	1-218-929-11	RES-CHIP	10 5%	1/16W
R2140	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2263	1-218-965-11	RES-CHIP	10K 5%	1/16W
R2141	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2264	1-218-941-81	RES-CHIP	100 5%	1/16W
R2142	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2265	1-218-990-81	SHORT CHIP	0	
R2143	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2266	1-218-990-81	SHORT CHIP	0	
R2145	1-218-937-11	RES-CHIP	47	5%	1/16W	R2267	1-218-990-81	SHORT CHIP	0	
R2146	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2268	1-218-990-81	SHORT CHIP	0	
R2147	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2269	1-218-990-81	SHORT CHIP	0	
R2200	1-218-933-11	RES-CHIP	22	5%	1/16W	R2270	1-218-990-81	SHORT CHIP	0	
R2201	1-218-937-11	RES-CHIP	47	5%	1/16W	R2271	1-218-990-81	SHORT CHIP	0	
R2203	1-218-941-81	RES-CHIP	100	5%	1/16W	R2272	1-218-990-81	SHORT CHIP	0	
R2205	1-218-941-81	RES-CHIP	100	5%	1/16W	R2275	1-218-953-11	RES-CHIP	1K 5%	1/16W
R2207	1-218-933-11	RES-CHIP	22	5%	1/16W	R2300	1-218-933-11	RES-CHIP	22 5%	1/16W
R2208	1-218-933-11	RES-CHIP	22	5%	1/16W	R2301	1-218-935-11	RES-CHIP	33 5%	1/16W
R2209	1-218-929-11	RES-CHIP	10	5%	1/16W	R2303	1-218-939-11	RES-CHIP	68 5%	1/16W
R2210	1-218-929-11	RES-CHIP	10	5%	1/16W	R2305	1-218-943-11	RES-CHIP	150 5%	1/16W
R2211	1-218-933-11	RES-CHIP	22	5%	1/16W	R2307	1-218-933-11	RES-CHIP	22 5%	1/16W
R2212	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2308	1-218-933-11	RES-CHIP	22 5%	1/16W
R2213	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2309	1-218-969-11	RES-CHIP	22K 5%	1/16W
R2214	1-218-973-11	RES-CHIP	47K	5%	1/16W	R2310	1-218-933-11	RES-CHIP	22 5%	1/16W
R2215	1-218-965-11	RES-CHIP	10K	5%	1/16W	R2311	1-218-969-11	RES-CHIP	22K 5%	1/16W
R2216	1-218-973-11	RES-CHIP	47K	5%	1/16W	R2312	1-218-973-11	RES-CHIP	47K 5%	1/16W
R2217	1-218-973-11	RES-CHIP	47K	5%	1/16W	R2313	1-218-965-11	RES-CHIP	10K 5%	1/16W

C

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R2314	1-218-973-11	RES-CHIP	47K 5% 1/16W	R2421	1-218-939-11	RES-CHIP	68 5% 1/16W
R2315	1-218-973-11	RES-CHIP	47K 5% 1/16W	R2422	1-218-990-81	SHORT CHIP	0
R2316	1-218-929-11	RES-CHIP	10 5% 1/16W	R2423	1-218-937-11	RES-CHIP	47 5% 1/16W
R2317	1-218-933-11	RES-CHIP	22 5% 1/16W	R2424	1-218-937-11	RES-CHIP	47 5% 1/16W
R2318	1-218-990-81	SHORT CHIP	0	R2425	1-218-937-11	RES-CHIP	47 5% 1/16W
R2319	1-218-990-81	SHORT CHIP	0	R2426	1-218-937-11	RES-CHIP	47 5% 1/16W
R2320	1-218-929-11	RES-CHIP	10 5% 1/16W	R2427	1-218-937-11	RES-CHIP	47 5% 1/16W
R2324	1-218-929-11	RES-CHIP	10 5% 1/16W	R2428	1-218-937-11	RES-CHIP	47 5% 1/16W
R2325	1-218-929-11	RES-CHIP	10 5% 1/16W	R2429	1-218-937-11	RES-CHIP	47 5% 1/16W
R2326	1-218-959-11	RES-CHIP	3.3K 5% 1/16W	R2430	1-218-937-11	RES-CHIP	47 5% 1/16W
R2327	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R2431	1-218-937-11	RES-CHIP	47 5% 1/16W
R2328	1-218-937-11	RES-CHIP	47 5% 1/16W	R2432	1-218-933-11	RES-CHIP	22 5% 1/16W
R2329	1-218-961-11	RES-CHIP	4.7K 5% 1/16W	R2433	1-218-933-11	RES-CHIP	22 5% 1/16W
R2330	1-218-937-11	RES-CHIP	47 5% 1/16W	R2434	1-216-295-91	SHORT CHIP	0
R2331	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2500	1-218-933-11	RES-CHIP	22 5% 1/16W
R2332	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2501	1-218-933-11	RES-CHIP	22 5% 1/16W
R2334	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2502	1-218-933-11	RES-CHIP	22 5% 1/16W
R2335	1-218-929-11	RES-CHIP	10 5% 1/16W	R2503	1-218-933-11	RES-CHIP	22 5% 1/16W
R2336	1-218-929-11	RES-CHIP	10 5% 1/16W	R2504	1-218-941-81	RES-CHIP	100 5% 1/16W
R2337	1-218-929-11	RES-CHIP	10 5% 1/16W	R2505	1-218-933-11	RES-CHIP	22 5% 1/16W
R2340	1-218-990-81	SHORT CHIP	0	R2506	1-218-933-11	RES-CHIP	22 5% 1/16W
R2341	1-218-973-11	RES-CHIP	47K 5% 1/16W	R2507	1-218-933-11	RES-CHIP	22 5% 1/16W
R2342	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2508	1-218-933-11	RES-CHIP	22 5% 1/16W
R2343	1-218-969-11	RES-CHIP	22K 5% 1/16W	R2509	1-218-933-11	RES-CHIP	22 5% 1/16W
R2344	1-218-929-11	RES-CHIP	10 5% 1/16W	R2510	1-218-933-11	RES-CHIP	22 5% 1/16W
R2345	1-218-929-11	RES-CHIP	10 5% 1/16W	R2511	1-218-933-11	RES-CHIP	22 5% 1/16W
R2346	1-218-929-11	RES-CHIP	10 5% 1/16W	R2512	1-218-933-11	RES-CHIP	22 5% 1/16W
R2347	1-218-929-11	RES-CHIP	10 5% 1/16W	R2513	1-218-933-11	RES-CHIP	22 5% 1/16W
R2348	1-218-929-11	RES-CHIP	10 5% 1/16W	R2514	1-218-933-11	RES-CHIP	22 5% 1/16W
R2349	1-218-929-11	RES-CHIP	10 5% 1/16W	R2515	1-218-933-11	RES-CHIP	22 5% 1/16W
R2350	1-218-929-11	RES-CHIP	10 5% 1/16W	R2516	1-218-933-11	RES-CHIP	22 5% 1/16W
R2351	1-218-929-11	RES-CHIP	10 5% 1/16W	R2517	1-218-933-11	RES-CHIP	22 5% 1/16W
R2352	1-218-965-11	RES-CHIP	10K 5% 1/16W	R2518	1-216-295-91	SHORT CHIP	0
R2353	1-218-990-81	SHORT CHIP	0	R2520	1-218-939-11	RES-CHIP	68 5% 1/16W
R2354	1-218-990-81	SHORT CHIP	0	R2521	1-218-939-11	RES-CHIP	68 5% 1/16W
R2355	1-218-990-81	SHORT CHIP	0	R2522	1-218-939-11	RES-CHIP	68 5% 1/16W
R2356	1-218-990-81	SHORT CHIP	0	R2523	1-218-939-11	RES-CHIP	68 5% 1/16W
R2357	1-218-990-81	SHORT CHIP	0	R2524	1-218-990-81	SHORT CHIP	0
R2358	1-218-990-81	SHORT CHIP	0	R2525	1-218-937-11	RES-CHIP	47 5% 1/16W
R2359	1-218-990-81	SHORT CHIP	0	R2526	1-218-937-11	RES-CHIP	47 5% 1/16W
R2360	1-218-990-81	SHORT CHIP	0	R2527	1-218-937-11	RES-CHIP	47 5% 1/16W
R2361	1-218-947-11	RES-CHIP	330 5% 1/16W	R2528	1-218-937-11	RES-CHIP	47 5% 1/16W
R2363	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2529	1-218-937-11	RES-CHIP	47 5% 1/16W
R2364	1-218-969-11	RES-CHIP	22K 5% 1/16W	R2530	1-218-937-11	RES-CHIP	47 5% 1/16W
R2400	1-218-933-11	RES-CHIP	22 5% 1/16W	R2531	1-218-937-11	RES-CHIP	47 5% 1/16W
R2401	1-218-933-11	RES-CHIP	22 5% 1/16W	R2532	1-218-937-11	RES-CHIP	47 5% 1/16W
R2402	1-218-933-11	RES-CHIP	22 5% 1/16W	R2533	1-218-937-11	RES-CHIP	47 5% 1/16W
R2403	1-218-941-81	RES-CHIP	100 5% 1/16W	R2534	1-216-295-91	SHORT CHIP	0
R2404	1-218-933-11	RES-CHIP	22 5% 1/16W	R2600	1-218-933-11	RES-CHIP	22 5% 1/16W
R2405	1-218-933-11	RES-CHIP	22 5% 1/16W	R2601	1-218-933-11	RES-CHIP	22 5% 1/16W
R2406	1-218-933-11	RES-CHIP	22 5% 1/16W	R2602	1-218-933-11	RES-CHIP	22 5% 1/16W
R2407	1-218-933-11	RES-CHIP	22 5% 1/16W	R2603	1-218-933-11	RES-CHIP	22 5% 1/16W
R2408	1-218-933-11	RES-CHIP	22 5% 1/16W	R2604	1-218-943-11	RES-CHIP	150 5% 1/16W
R2409	1-218-933-11	RES-CHIP	22 5% 1/16W	R2605	1-218-941-81	RES-CHIP	100 5% 1/16W
R2410	1-218-933-11	RES-CHIP	22 5% 1/16W	R2606	1-218-941-81	RES-CHIP	100 5% 1/16W
R2411	1-218-933-11	RES-CHIP	22 5% 1/16W	R2607	1-218-965-11	RES-CHIP	10K 5% 1/16W
R2412	1-218-933-11	RES-CHIP	22 5% 1/16W	R2608	1-218-929-11	RES-CHIP	10 5% 1/16W
R2413	1-218-933-11	RES-CHIP	22 5% 1/16W	R2611	1-218-965-11	RES-CHIP	10K 5% 1/16W
R2414	1-218-933-11	RES-CHIP	22 5% 1/16W	R2612	1-218-965-11	RES-CHIP	10K 5% 1/16W
R2415	1-218-933-11	RES-CHIP	22 5% 1/16W	R2613	1-218-965-11	RES-CHIP	10K 5% 1/16W
R2417	1-218-939-11	RES-CHIP	68 5% 1/16W	R2614	1-218-941-81	RES-CHIP	100 5% 1/16W
R2418	1-216-295-91	SHORT CHIP	0	R2615	1-218-965-11	RES-CHIP	10K 5% 1/16W
R2419	1-218-939-11	RES-CHIP	68 5% 1/16W	R2616	1-218-929-11	RES-CHIP	10 5% 1/16W
R2420	1-218-939-11	RES-CHIP	68 5% 1/16W				

C

REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK	
R2619	1-218-965-11	RES-CHIP	10K	5%	1/16W	R2691	1-218-973-11	RES-CHIP	47K 5%	1/16W
R2620	1-218-965-11	RES-CHIP	10K	5%	1/16W	R2692	1-218-973-11	RES-CHIP	47K 5%	1/16W
R2622	1-218-929-11	RES-CHIP	10	5%	1/16W	R2693	1-218-990-81	SHORT CHIP	0	
R2623	1-218-941-81	RES-CHIP	100	5%	1/16W	R2696	1-218-953-11	RES-CHIP	1K 5%	1/16W
R2624	1-218-941-81	RES-CHIP	100	5%	1/16W	R2697	1-218-953-11	RES-CHIP	1K 5%	1/16W
R2625	1-218-941-81	RES-CHIP	100	5%	1/16W	R2698	1-218-977-11	RES-CHIP	100K 5%	1/16W
R2626	1-218-941-81	RES-CHIP	100	5%	1/16W	R2700	1-218-933-11	RES-CHIP	22 5%	1/16W
R2627	1-218-941-81	RES-CHIP	100	5%	1/16W	R2701	1-218-933-11	RES-CHIP	22 5%	1/16W
R2628	1-218-941-81	RES-CHIP	100	5%	1/16W	R2702	1-218-933-11	RES-CHIP	22 5%	1/16W
R2629	1-218-941-81	RES-CHIP	100	5%	1/16W	R2703	1-218-933-11	RES-CHIP	22 5%	1/16W
R2630	1-218-941-81	RES-CHIP	100	5%	1/16W	R2704	1-218-943-11	RES-CHIP	150 5%	1/16W
R2631	1-218-941-81	RES-CHIP	100	5%	1/16W	R2705	1-218-943-11	RES-CHIP	150 5%	1/16W
R2632	1-218-941-81	RES-CHIP	100	5%	1/16W	R2706	1-218-941-81	RES-CHIP	100 5%	1/16W
R2633	1-218-967-11	RES-CHIP	15K	5%	1/16W	R2707	1-218-965-11	RES-CHIP	10K 5%	1/16W
R2634	1-218-941-81	RES-CHIP	100	5%	1/16W	R2708	1-218-929-11	RES-CHIP	10 5%	1/16W
R2635	1-218-941-81	RES-CHIP	100	5%	1/16W	R2710	1-218-965-11	RES-CHIP	10K 5%	1/16W
R2636	1-218-990-81	SHORT CHIP	0		R2713	1-218-965-11	RES-CHIP	10K 5%	1/16W	
R2637	1-218-941-81	RES-CHIP	100	5%	1/16W	R2714	1-218-941-81	RES-CHIP	100 5%	1/16W
R2638	1-218-941-81	RES-CHIP	100	5%	1/16W	R2715	1-218-965-11	RES-CHIP	10K 5%	1/16W
R2639	1-218-941-81	RES-CHIP	100	5%	1/16W	R2716	1-218-929-11	RES-CHIP	10 5%	1/16W
R2640	1-218-941-81	RES-CHIP	100	5%	1/16W	R2717	1-218-965-11	RES-CHIP	10K 5%	1/16W
R2641	1-218-941-81	RES-CHIP	100	5%	1/16W	R2719	1-218-965-11	RES-CHIP	10K 5%	1/16W
R2642	1-218-941-81	RES-CHIP	100	5%	1/16W	R2721	1-218-965-11	RES-CHIP	10K 5%	1/16W
R2643	1-218-941-81	RES-CHIP	100	5%	1/16W	R2722	1-218-929-11	RES-CHIP	10 5%	1/16W
R2644	1-218-941-81	RES-CHIP	100	5%	1/16W	R2723	1-218-941-81	RES-CHIP	100 5%	1/16W
R2645	1-218-941-81	RES-CHIP	100	5%	1/16W	R2724	1-218-941-81	RES-CHIP	100 5%	1/16W
R2646	1-218-941-81	RES-CHIP	100	5%	1/16W	R2725	1-218-941-81	RES-CHIP	100 5%	1/16W
R2647	1-218-941-81	RES-CHIP	100	5%	1/16W	R2726	1-218-941-81	RES-CHIP	100 5%	1/16W
R2648	1-218-967-11	RES-CHIP	15K	5%	1/16W	R2727	1-218-941-81	RES-CHIP	100 5%	1/16W
R2649	1-218-941-81	RES-CHIP	100	5%	1/16W	R2728	1-218-941-81	RES-CHIP	100 5%	1/16W
R2650	1-218-959-11	RES-CHIP	3.3K	5%	1/16W	R2729	1-218-941-81	RES-CHIP	100 5%	1/16W
R2651	1-218-990-81	SHORT CHIP	0		R2730	1-218-941-81	RES-CHIP	100 5%	1/16W	
R2652	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2731	1-218-941-81	RES-CHIP	100 5%	1/16W
R2654	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R2732	1-218-941-81	RES-CHIP	100 5%	1/16W
R2656	1-218-970-11	RES-CHIP	27K	5%	1/16W	R2733	1-218-967-11	RES-CHIP	15K 5%	1/16W
R2657	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2734	1-218-941-81	RES-CHIP	100 5%	1/16W
R2658	1-218-970-11	RES-CHIP	27K	5%	1/16W	R2735	1-218-941-81	RES-CHIP	100 5%	1/16W
R2659	1-218-929-11	RES-CHIP	10	5%	1/16W	R2736	1-218-941-81	RES-CHIP	100 5%	1/16W
R2660	1-218-957-11	RES-CHIP	2.2K	5%	1/16W	R2737	1-218-941-81	RES-CHIP	100 5%	1/16W
R2661	1-218-929-11	RES-CHIP	10	5%	1/16W	R2738	1-218-941-81	RES-CHIP	100 5%	1/16W
R2662	1-218-929-11	RES-CHIP	10	5%	1/16W	R2739	1-218-941-81	RES-CHIP	100 5%	1/16W
R2664	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2740	1-218-941-81	RES-CHIP	100 5%	1/16W
R2665	1-218-977-11	RES-CHIP	100K	5%	1/16W	R2741	1-218-941-81	RES-CHIP	100 5%	1/16W
R2666	1-218-965-11	RES-CHIP	10K	5%	1/16W	R2742	1-218-941-81	RES-CHIP	100 5%	1/16W
R2667	1-218-990-81	SHORT CHIP	0		R2743	1-218-941-81	RES-CHIP	100 5%	1/16W	
R2668	1-218-990-81	SHORT CHIP	0		R2744	1-218-941-81	RES-CHIP	100 5%	1/16W	
R2670	1-218-961-11	RES-CHIP	4.7K	5%	1/16W	R2745	1-218-941-81	RES-CHIP	100 5%	1/16W
R2671	1-218-977-11	RES-CHIP	100K	5%	1/16W	R2746	1-218-941-81	RES-CHIP	100 5%	1/16W
R2672	1-218-965-11	RES-CHIP	10K	5%	1/16W	R2747	1-218-967-11	RES-CHIP	15K 5%	1/16W
R2673	1-218-965-11	RES-CHIP	10K	5%	1/16W	R2748	1-218-941-81	RES-CHIP	100 5%	1/16W
R2674	1-218-990-81	SHORT CHIP	0		R2749	1-218-959-11	RES-CHIP	3.3K 5%	1/16W	
R2675	1-218-990-81	SHORT CHIP	0		R2750	1-218-977-11	RES-CHIP	100K 5%	1/16W	
R2676	1-216-864-11	SHORT CHIP	0		R2751	1-218-969-11	RES-CHIP	22K 5%	1/16W	
R2677	1-218-969-11	RES-CHIP	22K	5%	1/16W	R2753	1-218-957-11	RES-CHIP	2.2K 5%	1/16W
R2678	1-218-953-11	RES-CHIP	1K	5%	1/16W	R2755	1-218-970-11	RES-CHIP	27K 5%	1/16W
R2679	1-218-951-11	RES-CHIP	680	5%	1/16W	R2756	1-218-969-11	RES-CHIP	22K 5%	1/16W
R2680	1-218-953-11	RES-CHIP	1K	5%	1/16W	R2757	1-218-970-11	RES-CHIP	27K 5%	1/16W
R2681	1-208-703-11	METAL CHIP	6.8K	0.5%	1/16W	R2758	1-218-929-11	RES-CHIP	10 5%	1/16W
R2682	1-208-923-11	METAL CHIP	33K	0.5%	1/16W	R2759	1-218-957-11	RES-CHIP	2.2K 5%	1/16W
R2683	1-218-849-11	METAL CHIP	1.2K	0.5%	1/16W	R2760	1-218-929-11	RES-CHIP	10 5%	1/16W
R2684	1-218-965-11	RES-CHIP	10K	5%	1/16W	R2761	1-218-929-11	RES-CHIP	10 5%	1/16W
R2685	1-218-977-11	RES-CHIP	100K	5%	1/16W	R2763	1-218-969-11	RES-CHIP	22K 5%	1/16W
R2686	1-216-864-11	SHORT CHIP	0		R2765	1-218-990-81	SHORT CHIP	0		
					R2767	1-218-961-11	RES-CHIP	4.7K 5%	1/16W	



REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R2768	1-218-990-81	SHORT CHIP	0	R2850	1-218-977-11	RES-CHIP	100K 5% 1/16W
R2769	1-216-864-11	SHORT CHIP	0	R2851	1-218-969-11	RES-CHIP	22K 5% 1/16W
R2770	1-218-969-11	RES-CHIP	22K 5% 1/16W	R2853	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R2771	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2855	1-218-970-11	RES-CHIP	27K 5% 1/16W
R2772	1-218-951-11	RES-CHIP	680 5% 1/16W	R2856	1-218-969-11	RES-CHIP	22K 5% 1/16W
R2773	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2857	1-218-970-11	RES-CHIP	27K 5% 1/16W
R2774	1-208-703-11	METAL CHIP	6.8K 0.5% 1/16W	R2858	1-218-929-11	RES-CHIP	10 5% 1/16W
R2775	1-208-923-11	METAL CHIP	33K 0.5% 1/16W	R2859	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
R2776	1-218-849-11	METAL CHIP	1.2K 0.5% 1/16W	R2860	1-218-929-11	RES-CHIP	10 5% 1/16W
R2777	1-216-864-11	SHORT CHIP	0	R2861	1-218-929-11	RES-CHIP	10 5% 1/16W
R2784	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2863	1-218-969-11	RES-CHIP	22K 5% 1/16W
R2785	1-218-953-11	RES-CHIP	1K 5% 1/16W	R2864	1-218-951-11	RES-CHIP	680 5% 1/16W
R2786	1-218-990-81	SHORT CHIP	0	R2865	1-218-990-81	SHORT CHIP	0
R2787	1-218-990-81	SHORT CHIP	0	R2867	1-218-961-11	RES-CHIP	4.7K 5% 1/16W
R2789	1-218-951-11	RES-CHIP	680 5% 1/16W	R2868	1-218-990-81	SHORT CHIP	0
R2790	1-218-951-11	RES-CHIP	680 5% 1/16W	R2869	1-216-864-11	SHORT CHIP	0
R2791	1-218-951-11	RES-CHIP	680 5% 1/16W	R2870	1-218-969-11	RES-CHIP	22K 5% 1/16W
R2792	1-218-951-11	RES-CHIP	680 5% 1/16W	R2871	1-218-953-11	RES-CHIP	1K 5% 1/16W
R2800	1-218-933-11	RES-CHIP	22 5% 1/16W	R2872	1-218-951-11	RES-CHIP	680 5% 1/16W
R2801	1-218-933-11	RES-CHIP	22 5% 1/16W	R2873	1-218-953-11	RES-CHIP	1K 5% 1/16W
R2802	1-218-933-11	RES-CHIP	22 5% 1/16W	R2874	1-208-703-11	METAL CHIP	6.8K 0.5% 1/16W
R2803	1-218-933-11	RES-CHIP	22 5% 1/16W	R2875	1-208-923-11	METAL CHIP	33K 0.5% 1/16W
R2804	1-218-943-11	RES-CHIP	150 5% 1/16W	R2876	1-218-849-11	METAL CHIP	1.2K 0.5% 1/16W
R2805	1-218-943-11	RES-CHIP	150 5% 1/16W	R2877	1-216-864-11	SHORT CHIP	0
R2806	1-218-941-81	RES-CHIP	100 5% 1/16W	R2884	1-218-990-81	SHORT CHIP	0
R2807	1-218-965-11	RES-CHIP	10K 5% 1/16W	R2885	1-218-990-81	SHORT CHIP	0
R2808	1-218-929-11	RES-CHIP	10 5% 1/16W	R2886	1-218-953-11	RES-CHIP	1K 5% 1/16W
R2809	1-218-965-11	RES-CHIP	10K 5% 1/16W	R2887	1-218-953-11	RES-CHIP	1K 5% 1/16W
R2813	1-218-965-11	RES-CHIP	10K 5% 1/16W	R2889	1-218-951-11	RES-CHIP	680 5% 1/16W
R2814	1-218-941-81	RES-CHIP	100 5% 1/16W	R2901	1-218-732-11	METAL CHIP	47K 0.5% 1/10W
R2815	1-218-965-11	RES-CHIP	10K 5% 1/16W	R2902	1-218-684-11	METAL CHIP	470 0.5% 1/10W
R2816	1-218-929-11	RES-CHIP	10 5% 1/16W	R2903	1-218-929-11	RES-CHIP	10 5% 1/16W
R2817	1-218-965-11	RES-CHIP	10K 5% 1/16W	R2904	1-218-710-11	METAL CHIP	5.6K 0.5% 1/10W
R2818	1-218-965-11	RES-CHIP	10K 5% 1/16W	R2905	1-218-692-11	METAL CHIP	1K 0.5% 1/10W
R2819	1-218-965-11	RES-CHIP	10K 5% 1/16W	R2906	1-218-911-11	METAL CHIP	470K 0.5% 1/10W
R2822	1-218-929-11	RES-CHIP	10 5% 1/16W	R2909	1-218-716-11	METAL CHIP	10K 0.5% 1/10W
R2823	1-218-941-81	RES-CHIP	100 5% 1/16W	R2911	1-218-692-11	METAL CHIP	1K 0.5% 1/10W
R2824	1-218-941-81	RES-CHIP	100 5% 1/16W	R2912	1-218-728-11	METAL CHIP	33K 0.5% 1/10W
R2825	1-218-941-81	RES-CHIP	100 5% 1/16W	R2913	1-218-716-11	METAL CHIP	10K 0.5% 1/10W
R2826	1-218-941-81	RES-CHIP	100 5% 1/16W	R2917	1-218-716-11	METAL CHIP	10K 0.5% 1/10W
R2827	1-218-941-81	RES-CHIP	100 5% 1/16W	R2919	1-218-684-11	METAL CHIP	470 0.5% 1/10W
R2828	1-218-941-81	RES-CHIP	100 5% 1/16W	R2920	1-218-692-11	METAL CHIP	1K 0.5% 1/10W
R2829	1-218-941-81	RES-CHIP	100 5% 1/16W	R2921	1-218-692-11	METAL CHIP	1K 0.5% 1/10W
R2830	1-218-941-81	RES-CHIP	100 5% 1/16W	R2922	1-218-668-11	METAL CHIP	100 0.5% 1/10W
R2831	1-218-941-81	RES-CHIP	100 5% 1/16W	R2923	1-218-692-11	METAL CHIP	1K 0.5% 1/10W
R2832	1-218-941-81	RES-CHIP	100 5% 1/16W	R2924	1-218-740-11	METAL CHIP	100K 0.5% 1/10W
R2833	1-218-967-11	RES-CHIP	15K 5% 1/16W	R2926	1-218-911-11	METAL CHIP	470K 0.5% 1/10W
R2834	1-218-941-81	RES-CHIP	100 5% 1/16W	R2927	1-218-708-11	METAL CHIP	4.7K 0.5% 1/10W
R2835	1-218-941-81	RES-CHIP	100 5% 1/16W	R2928	1-218-692-11	METAL CHIP	1K 0.5% 1/10W
R2836	1-218-941-81	RES-CHIP	100 5% 1/16W	R2929	1-218-716-11	METAL CHIP	10K 0.5% 1/10W
R2837	1-218-941-81	RES-CHIP	100 5% 1/16W	R2930	1-218-716-11	METAL CHIP	10K 0.5% 1/10W
R2838	1-218-941-81	RES-CHIP	100 5% 1/16W	R2931	1-218-732-11	METAL CHIP	47K 0.5% 1/10W
R2839	1-218-941-81	RES-CHIP	100 5% 1/16W	R2932	1-218-732-11	METAL CHIP	47K 0.5% 1/10W
R2840	1-218-941-81	RES-CHIP	100 5% 1/16W	R2933	1-218-740-11	METAL CHIP	100K 0.5% 1/10W
R2841	1-218-941-81	RES-CHIP	100 5% 1/16W	R2934	1-218-740-11	METAL CHIP	100K 0.5% 1/10W
R2842	1-218-941-81	RES-CHIP	100 5% 1/16W	R2935	1-216-864-11	SHORT CHIP	0
R2843	1-218-941-81	RES-CHIP	100 5% 1/16W	R2936	1-218-740-11	METAL CHIP	100K 0.5% 1/10W
R2844	1-218-941-81	RES-CHIP	100 5% 1/16W	R2937	1-216-864-11	SHORT CHIP	0
R2845	1-218-941-81	RES-CHIP	100 5% 1/16W	R2938	1-216-864-11	SHORT CHIP	0
R2846	1-218-941-81	RES-CHIP	100 5% 1/16W	R2939	1-216-864-11	SHORT CHIP	0
R2847	1-218-967-11	RES-CHIP	15K 5% 1/16W	R2940	1-218-668-11	METAL CHIP	100 0.5% 1/10W
R2848	1-218-941-81	RES-CHIP	100 5% 1/16W	R2941	1-216-864-11	SHORT CHIP	0
R2849	1-218-959-11	RES-CHIP	3.3K 5% 1/16W	R2942	1-218-668-11	METAL CHIP	100 0.5% 1/10W



Les composants identifiés par une  
trame et une marque  $\Delta$  sont critiques  
pour la sécurité.  
Ne les remplacer que par une pièce  
portant le numéro spécifié.

The components identified by  
shading and mark  $\Delta$  are critical for  
safety.  
Replace only with part number  
specified.



REF. NO.	PART NO.	DESCRIPTION	REMARK
RB2404	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2405	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2406	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2407	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2408	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2409	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2410	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2411	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2412	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2413	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2414	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2415	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2416	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2417	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2418	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2419	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2420	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2421	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2422	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2423	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2424	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2425	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2426	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2427	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2428	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2429	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2430	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2431	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2432	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2500	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2501	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2502	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2503	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2504	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2505	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2506	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2507	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2508	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2509	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2510	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2511	1-234-943-21	RES, NETWORK 22	(1005X4)
RB2512	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2513	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2514	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2515	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2516	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2517	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2518	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2519	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2520	1-234-702-11	RES, NETWORK 68	(1005X4)
RB2521	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2522	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2523	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2524	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2525	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2526	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2527	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2528	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2529	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2530	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2531	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2532	1-234-944-21	RES, NETWORK 47	(1005X4)
RB2600	1-234-945-21	RES, NETWORK 100	(1005X4)
RB2601	1-234-945-21	RES, NETWORK 100	(1005X4)

REF. NO.	PART NO.	DESCRIPTION	REMARK
RB2602	1-234-378-11	RES, NETWORK 10K	(1005X4)
RB2700	1-234-945-21	RES, NETWORK 100	(1005X4)
RB2701	1-234-945-21	RES, NETWORK 100	(1005X4)
RB2702	1-234-378-11	RES, NETWORK 10K	(1005X4)
RB2800	1-234-945-21	RES, NETWORK 100	(1005X4)
RB2801	1-234-945-21	RES, NETWORK 100	(1005X4)
RB2802	1-234-378-11	RES, NETWORK 10K	(1005X4)
< TEST POINT >			
TP2000	1-535-757-11	CHIP, CHECKER	
TP2002	1-535-757-11	CHIP, CHECKER	
TP2005	1-535-757-11	CHIP, CHECKER	
TP2006	1-535-757-11	CHIP, CHECKER	
TP2100	1-535-757-11	CHIP, CHECKER	
TP2101	1-535-757-11	CHIP, CHECKER	
TP2200	1-535-757-11	CHIP, CHECKER	
TP2201	1-535-757-11	CHIP, CHECKER	
TP2202	1-535-757-11	CHIP, CHECKER	
TP2203	1-535-757-11	CHIP, CHECKER	
TP2204	1-535-757-11	CHIP, CHECKER	
TP2205	1-535-757-11	CHIP, CHECKER	
TP2206	1-535-757-11	CHIP, CHECKER	
TP2600	1-535-757-11	CHIP, CHECKER	
TP2601	1-535-757-11	CHIP, CHECKER	
TP2602	1-535-757-11	CHIP, CHECKER	
TP2700	1-535-757-11	CHIP, CHECKER	
TP2701	1-535-757-11	CHIP, CHECKER	
TP2702	1-535-757-11	CHIP, CHECKER	
TP2800	1-535-757-11	CHIP, CHECKER	
TP2801	1-535-757-11	CHIP, CHECKER	
TP2802	1-535-757-11	CHIP, CHECKER	
< VIBRATOR >			
X2200	1-781-975-21	OSCILLATOR, CRYSTAL	
*****			
A-1186-654-A G BOARD, COMPLETE			
*****			
1-533-223-11 FUSE HOLDER			
2-580-594-01 SCREW, +PSW M3X12			
* 4-042-408-02 PIN(45), WIRE			
4-382-854-01 SCREW (M3X8), P, SW (+)			
< CAPACITOR >			
C6000	1-161-964-91	CERAMIC	0.0047μF 250V
C6002 $\Delta$	1-119-892-51	CERAMIC	470pF 10% 250V
C6003	1-161-964-91	CERAMIC	0.0047μF 250V
C6006 $\Delta$	1-119-892-51	CERAMIC	470pF 10% 250V
C6007	1-117-753-11	ELECT(BLOCK)	470μF 20% 450V
C6009 $\Delta$	1-165-529-31	MYLAR	0.22μF 10 0V
C6011	1-163-021-91	CERAMIC CHIP	0.01μF 10% 50V
C6016 $\Delta$	1-165-530-21	MYLAR	0.47μF 10 0V
C6017 $\Delta$	1-165-530-21	MYLAR	0.47μF 10 0V
C6100	1-162-970-11	CERAMIC CHIP	0.01μF 10% 25V
C6101	1-107-905-11	ELECT	4.7μF 20% 50V
C6102	1-107-910-11	ELECT	100μF 20% 35V
C6103	1-162-970-11	CERAMIC CHIP	0.01μF 10% 25V
C6104	1-100-831-91	CERAMIC CHIP	0.001μF 2% 50V
C6105	1-107-906-11	ELECT	10μF 20% 50V
C6108	1-115-340-11	CERAMIC CHIP	0.22μF 10% 25V
C6109	1-107-888-11	ELECT	47μF 20% 25V
C6111	1-100-613-81	CERAMIC	470pF 5% 1KV

Les composants identifiés par une trame et une marque  $\Delta$  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark  $\Delta$  are critical for safety.  
Replace only with part number specified.



REF. NO.	PART NO.	DESCRIPTION	REMARK
C6112	1-100-919-11	FILM 0.027 $\mu$ F 3%	1KV
C6116	1-163-021-91	CERAMIC CHIP 0.01 $\mu$ F 10%	50V
C6200	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6201	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6202	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6203	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6204	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6205	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6206	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6207	1-128-953-31	ELECT 470 $\mu$ F 20%	25V
C6208	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6209	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6210	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6211	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6212	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6213	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6214	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6215	1-112-241-21	ELECT 1000 $\mu$ F 20%	25V
C6216	1-165-176-11	CERAMIC CHIP 0.047 $\mu$ F 10%	16V
C6217	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6218	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6219	1-112-221-21	ELECT 1800 $\mu$ F 20%	10V
C6220	1-112-241-21	ELECT 1000 $\mu$ F 20%	25V
C6221	1-112-231-21	ELECT 2200 $\mu$ F 20%	16V
C6222	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6223	1-164-315-11	CERAMIC CHIP 470pF 5%	50V
C6224	1-112-221-21	ELECT 1800 $\mu$ F 20%	10V
C6228	1-100-591-91	CERAMIC CHIP 1 $\mu$ F 10%	25V
C6229	1-100-911-11	CERAMIC CHIP 4.7 $\mu$ F 10%	25V
C6230	1-100-911-11	CERAMIC CHIP 4.7 $\mu$ F 10%	25V
C6300	1-161-964-91	CERAMIC 0.0047 $\mu$ F	250V
C6301	1-161-964-91	CERAMIC 0.0047 $\mu$ F	250V
C6303	1-100-780-31	ELECT 22 $\mu$ F 20%	450V
C6304	1-107-826-11	CERAMIC CHIP 0.1 $\mu$ F 10%	16V
C6306	1-107-902-11	ELECT 1 $\mu$ F 20%	50V
C6307	1-107-903-11	ELECT 2.2 $\mu$ F 20%	50V
C6308	1-100-139-41	FILM 0.001 $\mu$ F 5%	630V
C6309	1-107-910-11	ELECT 100 $\mu$ F 20%	50V
C6311	1-162-964-11	CERAMIC CHIP 0.001 $\mu$ F 10%	50V
C6312	1-165-729-31	ELECT 470 $\mu$ F 20%	16V
C6313	1-107-826-11	CERAMIC CHIP 0.1 $\mu$ F 10%	16V
C6314	1-107-882-91	ELECT 100 $\mu$ F 20%	16V
C6400	1-107-902-11	ELECT 1 $\mu$ F 20%	50V
C6401	1-107-882-91	ELECT 100 $\mu$ F 20%	16V
C6402	1-107-826-11	CERAMIC CHIP 0.1 $\mu$ F 10%	16V
C6403	1-107-902-11	ELECT 1 $\mu$ F 20%	50V
C6404	1-107-826-11	CERAMIC CHIP 0.1 $\mu$ F 10%	16V
C6406	1-162-968-11	CERAMIC CHIP 0.0047 $\mu$ F 10%	50V
C6407	1-162-974-11	CERAMIC CHIP 0.01 $\mu$ F	50V
C6412	1-162-964-11	CERAMIC CHIP 0.001 $\mu$ F 10%	50V
C6413	1-162-964-11	CERAMIC CHIP 0.001 $\mu$ F 10%	50V
C6500	1-117-227-11	MYLAR 1 $\mu$ F 10%	450V
C6501	1-163-021-91	CERAMIC CHIP 0.01 $\mu$ F 10%	50V
C6504 $\Delta$	1-112-188-11	MYLAR 1.5 $\mu$ F 5%	450V
C6505	1-100-613-81	CERAMIC 470pF 5%	1KV
C6506	1-100-613-81	CERAMIC 470pF 5%	1KV
C6518 $\Delta$	1-112-024-21	MYLAR 1 $\mu$ F 10%	450V
C6519	1-162-970-11	CERAMIC CHIP 0.01 $\mu$ F 10%	25V
C6520 $\Delta$	1-112-188-11	MYLAR 1.5 $\mu$ F 5%	450V
C6521	1-107-823-11	CERAMIC CHIP 0.47 $\mu$ F 10%	16V
C6522	1-162-964-11	CERAMIC CHIP 0.001 $\mu$ F 10%	50V
C6523	1-162-970-11	CERAMIC CHIP 0.01 $\mu$ F 10%	25V
C6524	1-162-915-11	CERAMIC CHIP 10pF	0.50PF 50V

REF. NO.	PART NO.	DESCRIPTION	REMARK
C6525	1-115-339-11	CERAMIC CHIP 0.1 $\mu$ F 10%	50V
C6526	1-107-906-11	ELECT 10 $\mu$ F 20%	50V
C6528	1-162-970-11	CERAMIC CHIP 0.01 $\mu$ F 10%	25V
C6530	1-107-902-11	ELECT 1 $\mu$ F 20%	50V
C6531	1-163-021-91	CERAMIC CHIP 0.01 $\mu$ F 10%	50V
C6901	1-164-156-11	CERAMIC CHIP 0.1 $\mu$ F	25V
C6903	1-164-156-11	CERAMIC CHIP 0.1 $\mu$ F	25V
C6905	1-126-935-11	ELECT 470 $\mu$ F 20%	16V
C6906	1-126-935-11	ELECT 470 $\mu$ F 20%	16V
C6907	1-126-947-11	ELECT 47 $\mu$ F 20%	25V
C6909	1-126-947-11	ELECT 47 $\mu$ F 20%	25V
C6911	1-100-566-91	CERAMIC CHIP 0.1 $\mu$ F 10%	25V
C6913	1-100-566-91	CERAMIC CHIP 0.1 $\mu$ F 10%	25V
C6916	1-126-947-11	ELECT 47 $\mu$ F 20%	25V
C6918	1-126-947-11	ELECT 47 $\mu$ F 20%	25V
C6919	1-100-566-91	CERAMIC CHIP 0.1 $\mu$ F 10%	25V
C6921	1-100-566-91	CERAMIC CHIP 0.1 $\mu$ F 10%	25V
C6931	1-162-974-11	CERAMIC CHIP 0.01 $\mu$ F	50V
C6932	1-162-974-11	CERAMIC CHIP 0.01 $\mu$ F	50V
C6933	1-162-974-11	CERAMIC CHIP 0.01 $\mu$ F	50V
C6934	1-162-974-11	CERAMIC CHIP 0.01 $\mu$ F	50V
C6936	1-162-974-11	CERAMIC CHIP 0.01 $\mu$ F	50V
C6939	1-162-974-11	CERAMIC CHIP 0.01 $\mu$ F	50V
C6947	1-100-597-91	CERAMIC CHIP 0.1 $\mu$ F 10%	25V
C6948	1-100-597-91	CERAMIC CHIP 0.1 $\mu$ F 10%	25V
< CONNECTOR >			
CN6001*	1-580-843-11	PIN, CONNECTOR (POWER)	
CN6003	1-695-915-11	TAB (CONTACT)	
CN6004	1-695-915-11	TAB (CONTACT)	
CN6100	1-695-915-11	TAB (CONTACT)	
CN6501*	1-691-960-21	PIN, CONNECTOR (PC BOARD) 3P	
CN6900	1-819-443-11	HEADER ASSEMBLY FOR PWB 15P	
CN6902*	1-778-391-11	SOCKET, PC CONNECTOR 96P	
< DIODE >			
D6000	8-719-054-89	DIODE D15XB60	
D6001	8-719-948-45	DIODE ERA22-08	
D6002	8-719-081-97	DIODE MMDL914T1	
D6102	8-719-081-67	DIODE M1FM3	
D6103	8-719-979-64	DIODE UF4005/23	
D6104	6-501-043-01	DIODE UMZ16NT106	
D6105	6-501-043-01	DIODE UMZ16NT106	
D6106	8-719-081-67	DIODE M1FM3	
D6107	8-719-081-67	DIODE M1FM3	
D6108	8-719-041-97	DIODE MA113-(TX)	
D6109	6-500-030-01	DIODE MM3Z16VST1	
D6200	8-719-510-09	DIODE D10SC6M	
D6201	8-719-510-73	DIODE S3L20UF4	
D6202	8-719-060-88	DIODE D4SBS6	
D6203	8-719-510-09	DIODE D10SC6M	
D6204	8-719-510-09	DIODE D10SC6M	
D6205	8-719-510-09	DIODE D10SC6M	
D6206	8-719-082-01	DIODE MM3Z12VT1	
D6207	8-719-081-97	DIODE MMDL914T1	
D6300	8-719-077-76	DIODE D2SB60A-F04	
D6301	6-500-849-01	DIODE ERA22-08KFLB	
D6302	6-500-567-31	DIODE 10ERB20-TB3	
D6303	6-500-567-31	DIODE 10ERB20-TB3	
D6304	8-719-052-90	DIODE D1NL40-TA2	
D6305	6-501-526-01	DIODE D1NS6-TR2	







REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R6208	1-218-875-11	METAL CHIP	15K 0.5% 1/10W	R6533	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6209	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W	R6534	1-216-809-11	METAL CHIP	100 5% 1/10W
R6210	1-216-841-11	METAL CHIP	47K 5% 1/10W	R6535	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6214	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6536	1-249-389-11	CARBON	4.7 5% 1/4W
R6215	1-216-864-11	SHORT CHIP	0	R6537	1-249-389-11	CARBON	4.7 5% 1/4W
R6216	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6538	1-249-405-11	CARBON	100 5% 1/4W
R6217	1-218-857-11	METAL CHIP	2.7K 0.5% 1/10W	R6539	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R6218	1-218-857-11	METAL CHIP	2.7K 0.5% 1/10W	R6540	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R6220	1-218-855-11	METAL CHIP	2.2K 0.5% 1/10W	R6542	1-208-814-91	METAL CHIP	22K 0.5% 1/10W
R6221	1-216-864-11	SHORT CHIP	0	R6545	1-208-840-11	METAL CHIP	270K 0.5% 1/10W
R6300	1-249-381-11	CARBON	1 5% 1/4W	R6546	1-208-840-11	METAL CHIP	270K 0.5% 1/10W
R6301	1-243-725-71	METAL OXIDE	100K 5% 1W	R6547	1-208-840-11	METAL CHIP	270K 0.5% 1/10W
R6302	1-216-830-11	METAL CHIP	5.6K 5% 1/10W	R6548	1-208-840-11	METAL CHIP	270K 0.5% 1/10W
R6303	1-249-387-11	CARBON	3.3 5% 1/4W	R6549	1-218-760-11	METAL CHIP	220K 0.5% 1/10W
R6304	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6550	1-218-869-11	METAL CHIP	8.2K 0.5% 1/10W
R6305	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R6551	1-249-393-11	CARBON	10 5% 1/4W
R6306	1-216-805-11	METAL CHIP	47 5% 1/10W	R6552	1-216-809-11	METAL CHIP	100 5% 1/10W
R6308	1-218-871-11	METAL CHIP	10K 0.5% 1/10W	R6554	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6309	1-218-871-11	METAL CHIP	10K 0.5% 1/10W	R6555	1-216-845-11	METAL CHIP	100K 5% 1/10W
R6400	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6556	1-216-837-11	METAL CHIP	22K 5% 1/10W
R6401	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W	R6557	1-218-833-11	METAL CHIP	270 0.5% 1/10W
R6402	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6558	1-216-121-11	RES-CHIP	1M 5% 1/10W
R6403	1-218-887-11	METAL CHIP	47K 0.5% 1/10W	R6559	1-208-818-11	METAL CHIP	33K 0.5% 1/10W
R6404	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	R6561	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R6405	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	R6562	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R6406	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6900	1-216-864-11	SHORT CHIP	0
R6407	1-216-837-11	METAL CHIP	22K 5% 1/10W	R6901	1-216-864-11	SHORT CHIP	0
R6408	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W	R6904	1-216-864-11	SHORT CHIP	0
R6409	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6905	1-216-864-11	SHORT CHIP	0
R6410	1-216-823-11	METAL CHIP	1.5K 5% 1/10W	R6911	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6411	1-216-864-11	SHORT CHIP	0	R6915	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6412	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6921	1-218-720-11	METAL CHIP	15K 0.5% 1/10W
R6413	1-218-863-11	METAL CHIP	4.7K 0.5% 1/10W	R6922	1-218-716-11	METAL CHIP	10K 0.5% 1/10W
R6417	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6925	1-218-722-11	METAL CHIP	18K 0.5% 1/10W
R6418	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	R6926	1-218-716-11	METAL CHIP	10K 0.5% 1/10W
R6419	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	R6937	1-216-864-11	SHORT CHIP	0
R6436	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	R6950	1-216-864-11	SHORT CHIP	0
R6437	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6956	1-216-864-11	SHORT CHIP	0
R6442	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6957	1-216-864-11	SHORT CHIP	0
R6452	1-218-851-11	METAL CHIP	1.5K 0.5% 1/10W	R6958	1-216-864-11	SHORT CHIP	0
R6454	1-216-829-11	METAL CHIP	4.7K 5% 1/10W	R6959	1-216-864-11	SHORT CHIP	0
R6455	1-218-903-11	METAL CHIP	220K 0.5% 1/10W	R6960	1-216-864-11	SHORT CHIP	0
R6456	1-218-871-11	METAL CHIP	10K 0.5% 1/10W	R6961	1-216-864-11	SHORT CHIP	0
R6459	1-218-849-11	METAL CHIP	1.2K 0.5% 1/10W	R6962	1-216-864-11	SHORT CHIP	0
R6460	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6963	1-216-864-11	SHORT CHIP	0
R6461	1-216-864-11	SHORT CHIP	0	R6964	1-216-864-11	SHORT CHIP	0
R6500	1-220-926-81	FUSIBLE	0.47 10% 1/2W	R6965	1-216-864-11	SHORT CHIP	0
R6501	1-216-857-11	METAL CHIP	1M 5% 1/10W	R6966	1-218-716-11	METAL CHIP	10K 0.5% 1/10W
R6503	1-215-882-00	METAL OXIDE	22 5% 2W	R6968	1-218-712-11	METAL CHIP	6.8K 0.5% 1/10W
R6505	1-211-991-11	METAL CHIP	82 0.5% 1/10W	R6975	1-216-864-11	SHORT CHIP	0
R6512	1-218-907-11	METAL CHIP	330K 0.5% 1/10W	R6976	1-216-864-11	SHORT CHIP	0
R6513	1-218-879-11	METAL CHIP	22K 0.5% 1/10W	R6977	1-216-864-11	SHORT CHIP	0
R6514	1-218-895-11	METAL CHIP	100K 0.5% 1/10W	R6978	1-216-864-11	SHORT CHIP	0
R6516	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	R6979	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6517	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	R6980	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6518	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	R6981	1-216-809-11	METAL CHIP	100 5% 1/10W
R6519	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	R6982	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6526	1-218-760-11	METAL CHIP	220K 0.5% 1/10W	R6983	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6527	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W	R6984	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6528	1-218-867-11	METAL CHIP	6.8K 0.5% 1/10W	R6985	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6530	1-219-729-11	METAL	0.33 10% 5W				
R6531	1-219-729-11	METAL	0.33 10% 5W				
R6532	1-216-864-11	SHORT CHIP	0				

Les composants identifiés par une trame et une marque  $\Delta$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark  $\Delta$  are critical for safety. Replace only with part number specified.



REF. NO.	PART NO.	DESCRIPTION	REMARK
		< RELAY >	
R6003 $\Delta$	1-755-245-11	RELAY, AC POWER	
R6004 $\Delta$	1-755-245-11	RELAY, AC POWER	
		< TRANSFORMER >	
T6200 $\Delta$	1-443-848-11	CONVERTER TRANSFORMER (PIT)	
T6300 $\Delta$	1-443-842-11	CONVERTER TRANSFOR (SBT)	
		< THERMISTOR >	
TH6300	1-803-586-41	THERMISTOR	
		< VARISTOR >	
VD6000 $\Delta$	1-805-479-21	VARISTOR	
VD6002 $\Delta$	1-805-479-21	VARISTOR	
*****			
	A-1166-579-A	H1 BOARD, COMPLETE	*****
		< CAPACITOR >	
C3000	1-100-597-91	CERAMIC CHIP 0.1 $\mu$ F	10% 25V
		< DIODE >	
D3001	8-719-036-94	DIODE RD5.6SB-T1	
		< RESISTOR >	
R3000	1-218-825-11	METAL CHIP 120	0.5% 1/10W
R3002	1-218-827-11	METAL CHIP 150	0.5% 1/10W
R3004	1-218-833-11	METAL CHIP 270	0.5% 1/10W
R3005	1-218-841-11	METAL CHIP 560	0.5% 1/10W
R3006	1-218-851-11	METAL CHIP 1.5K	0.5% 1/10W
		< SWITCH >	
S3000	1-762-196-21	SWITCH, TACT (CHANNEL +)	
S3001	1-762-196-21	SWITCH, TACT (CHANNEL -)	
S3002	1-762-196-21	SWITCH, TACT (VOLUME +)	
S3003	1-762-196-21	SWITCH, TACT (VOLUME -)	
S3004	1-762-196-21	SWITCH, TACT (TV/VIDEO)	
S3005	1-762-196-21	SWITCH, TACT (MENU)	
		< VARISTOR >	
VD3000	1-803-974-21	VARISTOR, CHIP (1608)	
*****			
	A-1166-580-B	H2 BOARD, COMPLETE	*****
		< CAPACITOR >	
C3050	1-100-597-91	CERAMIC CHIP 0.1 $\mu$ F	10% 25V
C3051	1-128-991-21	ELECT CHIP 10 $\mu$ F	20% 50V
C3052	1-162-970-11	CERAMIC CHIP 0.01 $\mu$ F	10% 25V
C3053	1-162-970-11	CERAMIC CHIP 0.01 $\mu$ F	10% 25V
C3054	1-162-970-11	CERAMIC CHIP 0.01 $\mu$ F	10% 25V
C3055	1-100-597-91	CERAMIC CHIP 0.1 $\mu$ F	10% 25V
C3056	1-162-970-11	CERAMIC CHIP 0.01 $\mu$ F	10% 25V

REF. NO.	PART NO.	DESCRIPTION	REMARK
C3057	1-162-970-11	CERAMIC CHIP 0.01 $\mu$ F	10% 25V
		< DIODE >	
D3053	6-500-861-01	DIODE SML-020MVT-T86	(POWER/STANDBY)
D3054	8-719-064-07	DIODE SML-310LTT86	(LAMP)
D3055	6-500-861-01	DIODE SML-020MVT-T86	(TIMER)
		< TRANSISTOR >	
Q3050	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q3051	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q3052	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q3053	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
		< RESISTOR >	
R3050	1-216-813-11	METAL CHIP 220	5% 1/10W
R3051	1-216-805-11	METAL CHIP 47	5% 1/10W
R3052	1-216-864-11	SHORT CHIP 0	
R3053	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3054	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3055	1-216-813-11	METAL CHIP 220	5% 1/10W
R3056	1-216-813-11	METAL CHIP 220	5% 1/10W
R3057	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3058	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3059	1-216-813-11	METAL CHIP 220	5% 1/10W
R3060	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3061	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3062	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3063	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3064	1-216-813-11	METAL CHIP 220	5% 1/10W
R3065	1-216-813-11	METAL CHIP 220	5% 1/10W
R3068	1-216-864-11	SHORT CHIP 0	
		< SWITCH >	
S3050	1-762-196-21	SWITCH, TACT (POWER)	
*****			
	A-1166-581-A	H3 BOARD, COMPLETE	*****
	* 4-042-408-02	PIN(45), WIRE	
		< CAPACITOR >	
C3105	1-162-964-11	CERAMIC CHIP 0.001 $\mu$ F	10% 50V
C3106	1-162-964-11	CERAMIC CHIP 0.001 $\mu$ F	10% 50V
C3107	1-125-889-91	CERAMIC CHIP 2.2 $\mu$ F	10% 10V
C3108	1-125-889-91	CERAMIC CHIP 2.2 $\mu$ F	10% 10V
		< CONNECTOR >	
CN3100*	1-815-022-11	PIN, CONNECTOR (WITH PWB)	6P
		< DIODE >	
D3100	8-719-036-94	DIODE RD5.6SB-T1	
D3101	8-719-036-94	DIODE RD5.6SB-T1	
D3102	8-719-977-28	DIODE DTZ10B	
D3103	8-719-977-28	DIODE DTZ10B	



REF. NO.	PART NO.	DESCRIPTION	REMARK
		< JACK >	
J3100	1-820-377-11	PHONO JACK 3P (VIDEO/HD/DVD IN 2: PR/PB/Y)	
J3101	1-819-387-11	PHONO JACK 3P (VIDEO/HD/DVD IN 2: VIDEO/AUDIO)	
		< RESISTOR >	
R3101	1-216-864-11	SHORT CHIP	0
R3102	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R3103	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R3106	1-218-831-11	METAL CHIP	220 0.5% 1/10W
R3107	1-216-849-11	METAL CHIP	220K 5% 1/10W
R3108	1-216-849-11	METAL CHIP	220K 5% 1/10W
R3109	1-216-821-11	METAL CHIP	1K 5% 1/10W
R3110	1-216-821-11	METAL CHIP	1K 5% 1/10W
R3112	1-216-864-11	SHORT CHIP	0
R3117	1-216-821-11	METAL CHIP	1K 5% 1/10W
R3118	1-216-864-11	SHORT CHIP	0
R3119	1-216-864-11	SHORT CHIP	0
R3120	1-216-864-11	SHORT CHIP	0
		< VARISTOR >	
VD3100	1-804-988-21	VARISTOR, CHIP (1608)	
VD3101	1-803-974-21	VARISTOR, CHIP (1608)	
VD3102	1-803-974-21	VARISTOR, CHIP (1608)	
*****			
	A-1205-237-B	QM BOARD, COMPLETE	*****
		< CAPACITOR >	
C7301	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7302	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7303	1-165-875-11	CERAMIC CHIP	10μF 10% 10V
C7306	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7307	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7308	1-126-246-11	ELECT CHIP	220μF 20% 4V
C7319	1-126-246-11	ELECT CHIP	220μF 20% 4V
C7320	1-100-583-21	ELECT CHIP	470μF 20% 4V
C7321	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7322	1-164-864-11	CERAMIC CHIP	39pF 5% 50V
C7323	1-164-858-11	CERAMIC CHIP	22pF 5% 50V
C7324	1-164-868-11	CERAMIC CHIP	56pF 5% 50V
C7325	1-164-858-11	CERAMIC CHIP	22pF 5% 50V
C7326	1-164-868-11	CERAMIC CHIP	56pF 5% 50V
C7327	1-164-864-11	CERAMIC CHIP	39pF 5% 50V
C7328	1-164-862-11	CERAMIC CHIP	33pF 5% 50V
C7330	1-126-246-11	ELECT CHIP	220μF 20% 4V
C7333	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7334	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7335	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7336	1-100-909-11	CERAMIC CHIP	10μF 10% 6.3V
C7337	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7338	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7339	1-125-838-11	CERAMIC CHIP	2.2μF 10% 6.3V
C7340	1-125-838-11	CERAMIC CHIP	2.2μF 10% 6.3V
C7341	1-162-962-11	CERAMIC CHIP	470pF 10% 50V
C7344	1-125-837-91	CERAMIC CHIP	1μF 10% 6.3V
C7345	1-125-837-91	CERAMIC CHIP	1μF 10% 6.3V
C7346	1-162-962-11	CERAMIC CHIP	470pF 10% 50V
C7348	1-112-691-11	CERAMIC CHIP	22μF 10% 16V

REF. NO.	PART NO.	DESCRIPTION	REMARK
C7349	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7350	1-112-691-11	CERAMIC CHIP	22μF 10% 16V
C7351	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7352	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7353	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7354	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7355	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7356	1-112-691-11	CERAMIC CHIP	22μF 10% 16V
C7357	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7358	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7359	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7360	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7361	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7362	1-164-854-11	CERAMIC CHIP	15pF 5% 50V
C7364	1-164-862-11	CERAMIC CHIP	33pF 5% 50V
C7365	1-100-506-91	CERAMIC CHIP	1μF 20% 6.3V
C7366	1-100-506-91	CERAMIC CHIP	1μF 20% 6.3V
C7369	1-164-854-11	CERAMIC CHIP	15pF 5% 50V
C7372	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7373	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7374	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7375	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7376	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7377	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7378	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7379	1-100-506-91	CERAMIC CHIP	1μF 20% 6.3V
C7380	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7381	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7382	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7383	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7384	1-100-506-91	CERAMIC CHIP	1μF 20% 6.3V
C7385	1-100-506-91	CERAMIC CHIP	1μF 20% 6.3V
C7386	1-100-506-91	CERAMIC CHIP	1μF 20% 6.3V
C7387	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7388	1-112-691-11	CERAMIC CHIP	22μF 10% 16V
C7389	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7390	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7391	1-112-691-11	CERAMIC CHIP	22μF 10% 16V
C7392	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7393	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7394	1-112-691-11	CERAMIC CHIP	22μF 10% 16V
C7395	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7396	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7397	1-112-691-11	CERAMIC CHIP	22μF 10% 16V
C7398	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7400	1-164-856-81	CERAMIC CHIP	18pF 5% 50V
C7401	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7402	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7403	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7404	1-164-858-11	CERAMIC CHIP	22pF 5% 50V
C7405	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7406	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7407	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7408	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7409	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7410	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7411	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7412	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7415	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7416	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7419	1-112-691-11	CERAMIC CHIP	22μF 10% 16V
C7420	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7422	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V
C7423	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V

QM

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
C7424	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7663	1-164-858-11	CERAMIC CHIP	22pF 5% 50V
C7425	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7664	1-127-988-81	CERAMIC CHIP	15000pF 10% 16V
C7426	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7665	1-164-937-11	CERAMIC CHIP	0.001μF 10% 50V
C7427	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7666	1-165-887-91	CERAMIC CHIP	0.22μF 10% 6.3V
C7429	1-126-246-11	ELECT CHIP	220μF 20% 4V	C7667	1-164-858-11	CERAMIC CHIP	22pF 5% 50V
C7431	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7668	1-164-937-11	CERAMIC CHIP	0.001μF 10% 50V
C7432	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7669	1-164-937-11	CERAMIC CHIP	0.001μF 10% 50V
C7433	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7670	1-127-988-81	CERAMIC CHIP	15000pF 10% 16V
C7434	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7671	1-164-882-11	CERAMIC CHIP	220pF 5% 16V
C7435	1-165-887-91	CERAMIC CHIP	0.22μF 10% 6.3V	C7672	1-164-882-11	CERAMIC CHIP	220pF 5% 16V
C7436	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7673	1-164-882-11	CERAMIC CHIP	220pF 5% 16V
C7437	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7674	1-164-882-11	CERAMIC CHIP	220pF 5% 16V
C7438	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7675	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7439	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7676	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7440	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7677	1-165-908-11	CERAMIC CHIP	1μF 10% 10V
C7441	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7678	1-165-908-11	CERAMIC CHIP	1μF 10% 10V
C7443	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7679	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7444	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7680	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7446	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7681	1-165-908-11	CERAMIC CHIP	1μF 10% 10V
C7448	1-100-506-91	CERAMIC CHIP	1μF 20% 6.3V	C7682	1-165-908-11	CERAMIC CHIP	1μF 10% 10V
C7449	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7683	1-165-908-11	CERAMIC CHIP	1μF 10% 10V
C7450	1-100-506-91	CERAMIC CHIP	1μF 20% 6.3V	C7684	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7451	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7685	1-165-908-11	CERAMIC CHIP	1μF 10% 10V
C7452	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7686	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7454	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7687	1-127-573-11	CERAMIC CHIP	1μF 10% 16V
C7456	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7688	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7457	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7689	1-127-573-11	CERAMIC CHIP	1μF 10% 16V
C7458	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7690	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V
C7459	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7693	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7461	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7696	1-165-875-11	CERAMIC CHIP	10μF 10% 10V
C7463	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7698	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7464	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7699	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7466	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7700	1-165-875-11	CERAMIC CHIP	10μF 10% 10V
C7467	1-164-937-11	CERAMIC CHIP	0.001μF 10% 50V	C7701	1-107-826-11	CERAMIC CHIP	0.1μF 10% 16V
C7469	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7703	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7472	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7704	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7502	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7705	1-107-826-11	CERAMIC CHIP	0.1μF 10% 16V
C7503	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V	C7707	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7504	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V	C7708	1-107-826-11	CERAMIC CHIP	0.1μF 10% 16V
C7505	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7711	1-107-826-11	CERAMIC CHIP	0.1μF 10% 16V
C7506	1-117-681-11	ELECT CHIP	100μF 20% 16V	C7716	1-100-055-11	CERAMIC CHIP	22μF 20% 16V
C7509	1-117-681-11	ELECT CHIP	100μF 20% 16V	C7719	1-126-246-11	ELECT CHIP	220μF 20% 4V
C7511	1-100-567-81	CERAMIC CHIP	10000pF 10% 25V	C7720	1-100-583-21	ELECT CHIP	470μF 20% 4V
C7512	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7721	1-100-583-21	ELECT CHIP	470μF 20% 4V
C7513	1-125-837-91	CERAMIC CHIP	1μF 10% 6.3V	C7725	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7544	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V	C7726	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7552	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V	C7727	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7553	1-100-566-91	CERAMIC CHIP	0.1μF 10% 25V	C7728	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7556	1-162-927-11	CERAMIC CHIP	100pF 5% 50V	C7730	1-117-681-11	ELECT CHIP	100μF 20% 16V
C7595	1-126-246-11	ELECT CHIP	220μF 20% 4V	C7731	1-164-870-11	CERAMIC CHIP	68pF 5% 50V
C7596	1-100-055-11	CERAMIC CHIP	22μF 20% 16V	C7732	1-164-870-11	CERAMIC CHIP	68pF 5% 50V
C7651	1-164-937-11	CERAMIC CHIP	0.001μF 10% 50V	C7733	1-164-870-11	CERAMIC CHIP	68pF 5% 50V
C7652	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7734	1-164-870-11	CERAMIC CHIP	68pF 5% 50V
C7653	1-164-862-11	CERAMIC CHIP	33pF 5% 50V	C7735	1-165-908-11	CERAMIC CHIP	1μF 10% 10V
C7654	1-164-862-11	CERAMIC CHIP	33pF 5% 50V	C7736	1-165-908-11	CERAMIC CHIP	1μF 10% 10V
C7655	1-164-862-11	CERAMIC CHIP	33pF 5% 50V	C7737	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7656	1-164-937-11	CERAMIC CHIP	0.001μF 10% 50V	C7738	1-125-837-91	CERAMIC CHIP	1μF 10% 6.3V
C7657	1-127-988-81	CERAMIC CHIP	15000pF 10% 16V	C7739	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7658	1-100-916-11	CERAMIC CHIP	0.1μF 10% 16V	C7740	1-125-837-91	CERAMIC CHIP	1μF 10% 6.3V
C7659	1-164-862-11	CERAMIC CHIP	33pF 5% 50V	C7741	1-100-909-11	CERAMIC CHIP	10μF 10% 6.3V
C7660	1-164-937-11	CERAMIC CHIP	0.001μF 10% 50V	C7742	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7661	1-127-988-81	CERAMIC CHIP	15000pF 10% 16V	C7743	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V
C7662	1-165-887-91	CERAMIC CHIP	0.22μF 10% 6.3V	C7744	1-165-989-11	CERAMIC CHIP	10μF 10% 6.3V

QM

REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK
C7745	1-165-989-11	CERAMIC CHIP	10µF	10%	6.3V				
C7746	1-165-989-11	CERAMIC CHIP	10µF	10%	6.3V				
C7747	1-165-989-11	CERAMIC CHIP	10µF	10%	6.3V				
C7748	1-165-989-11	CERAMIC CHIP	10µF	10%	6.3V				
C7749	1-165-989-11	CERAMIC CHIP	10µF	10%	6.3V				
							< CONNECTOR >		
C7865	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	CN7310*	1-793-141-21	PIN, CONNECTOR (PC BOARD)	15P
C7867	1-165-989-11	CERAMIC CHIP	10µF	10%	6.3V	CN7319	1-820-187-11	HEADER ASSEMBLY (PRINT PWB)	10P
C7868	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	CN7802	1-819-390-51	FFC/FPC CONNECTOR (ZIF)	49P
C7952	1-100-566-91	CERAMIC CHIP	0.1µF	10%	25V				
C7953	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V				
							< DIODE >		
C7954	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	D7306	8-719-053-07	DIODE	SML-310MTT86
C7955	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	D7307	8-719-081-34	DIODE	RB160M-30TR
C7956	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	D7308	8-719-081-34	DIODE	RB160M-30TR
C7957	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	D7310	8-719-083-58	DIODE	UDZSTE-173.9B
C7958	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	D7311	8-719-404-50	DIODE	MA111-TX
C7959	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	D7802	8-719-053-07	DIODE	SML-310MTT86
C7960	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	D7803	8-719-053-09	DIODE	SML-310VTT86
C7961	1-100-506-91	CERAMIC CHIP	1µF	20%	6.3V	D8100	8-719-073-34	DIODE	EC21QS03L-TE12L
C7962	1-100-506-91	CERAMIC CHIP	1µF	20%	6.3V				
C7963	1-100-506-91	CERAMIC CHIP	1µF	20%	6.3V				
							< EARTH TERMINAL >		
C7964	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	ET7300	1-780-336-11	EARTH TERMINAL	
C7965	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	ET7301	1-780-336-11	EARTH TERMINAL	
C7966	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V				
C7967	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V				
C7968	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V				
							< FUSE >		
C7969	1-164-937-11	CERAMIC CHIP	0.001µF	10%	50V	F7650	1-576-925-11	IC LINK	3.15A 0V
C7970	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	F7651	1-576-925-11	IC LINK	3.15A 0V
C7971	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V				
C7972	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V				
C7973	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V				
							< FERRITE BEAD >		
C7974	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7301	1-400-089-21	FERRITE	0µH
C7975	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7304	1-400-180-21	FERRITE	0µH
C7976	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7305	1-400-180-21	FERRITE	0µH
C7977	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7310	1-400-180-21	FERRITE	0µH
C7978	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7311	1-400-180-21	FERRITE	0µH
C7979	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7313	1-400-089-21	FERRITE	0µH
C7980	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7314	1-400-089-21	FERRITE	0µH
C7981	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7321	1-400-089-21	FERRITE	0µH
C7982	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7322	1-400-180-21	FERRITE	0µH
C7983	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7328	1-414-229-11	FERRITE	0µH
C7984	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7329	1-414-229-11	FERRITE	0µH
C7985	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7330	1-414-229-11	FERRITE	0µH
C7986	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7331	1-400-180-21	FERRITE	0µH
C7988	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7332	1-414-229-11	FERRITE	0µH
C7990	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7333	1-414-229-11	FERRITE	0µH
C7991	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7334	1-414-229-11	FERRITE	0µH
C7992	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7335	1-414-229-11	FERRITE	0µH
C7993	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7336	1-414-229-11	FERRITE	0µH
C7994	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7337	1-414-229-11	FERRITE	0µH
C7996	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7338	1-414-229-11	FERRITE	0µH
C7997	1-165-989-11	CERAMIC CHIP	10µF	10%	6.3V	FB7340	1-481-160-21	INDUCTOR	0µH
C7998	1-100-909-11	CERAMIC CHIP	10µF	10%	6.3V	FB7341	1-481-160-21	INDUCTOR	0µH
C7999	1-165-989-11	CERAMIC CHIP	10µF	10%	6.3V	FB7342	1-481-160-21	INDUCTOR	0µH
C8025	1-117-681-11	ELECT CHIP	100µF	20%	16V	FB7343	1-481-160-21	INDUCTOR	0µH
C8040	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7344	1-481-160-21	INDUCTOR	0µH
C8100	1-117-681-11	ELECT CHIP	100µF	20%	16V	FB7345	1-481-160-21	INDUCTOR	0µH
C8101	1-126-246-11	ELECT CHIP	220µF	20%	4V	FB7346	1-481-160-21	INDUCTOR	0µH
C8102	1-125-891-11	CERAMIC CHIP	0.47µF	10%	10V	FB7650	1-216-295-91	SHORT CHIP	0
C8103	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7651	1-216-295-91	SHORT CHIP	0
C8104	1-100-916-11	CERAMIC CHIP	0.1µF	10%	16V	FB7652	1-216-295-91	SHORT CHIP	0
C8105	1-164-937-11	CERAMIC CHIP	0.001µF	10%	50V	FB7653	1-216-295-91	SHORT CHIP	0
C8106	1-117-681-11	ELECT CHIP	100µF	20%	16V	FB7654	1-216-295-91	SHORT CHIP	0
C8107	1-117-681-11	ELECT CHIP	100µF	20%	16V	FB7655	1-216-295-91	SHORT CHIP	0
C8108	1-127-573-11	CERAMIC CHIP	1µF	10%	16V	FB7657	1-414-229-11	FERRITE	0µH
						FB7658	1-414-229-11	FERRITE	0µH

QM

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
FB7659	1-414-229-11	FERRITE	0μH	R7361	1-218-965-11	RES-CHIP	10K 5% 1/16W
FB7700	1-400-620-21	FERRITE	0μH	R7367	1-218-965-11	RES-CHIP	10K 5% 1/16W
FB7907	1-400-180-21	FERRITE	0μH	R7368	1-218-965-11	RES-CHIP	10K 5% 1/16W
FB8000	1-414-229-11	FERRITE	0μH	R7371	1-218-965-11	RES-CHIP	10K 5% 1/16W
		< FILTER >		R7372	1-218-965-11	RES-CHIP	10K 5% 1/16W
FL7300	1-400-284-21	INDUCTOR	0μH	R7382	1-218-957-11	RES-CHIP	2.2K 5% 1/16W
		< IC >		R7384	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC7300	6-709-273-01	IC 215H47AGA21HG		R7385	1-218-977-11	RES-CHIP	100K 5% 1/16W
IC7304	6-703-175-01	IC PST3629UL		R7386	1-218-965-11	RES-CHIP	10K 5% 1/16W
IC7311	6-700-227-01	IC MM1561JFBE		R7399	1-216-801-11	METAL CHIP	22 5% 1/10W
IC7312	6-700-227-01	IC MM1561JFBE		R7401	1-208-862-81	METAL CHIP	91 0.5% 1/16W
IC7319	6-708-910-01	IC NAND128W3A2BN6F		R7402	1-208-862-81	METAL CHIP	91 0.5% 1/16W
IC7320	6-708-624-01	IC M25P10-AVMN6TP		R7403	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
IC7322	6-706-901-01	IC K4H561638F-UCCCT00		R7404	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
IC7324	6-706-901-01	IC K4H561638F-UCCCT00		R7406	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
IC7326	6-702-688-01	IC M24C64-WMN6T(B)		R7409	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
IC7331	6-706-334-01	IC TC74VCX162374(EL,F		R7410	1-218-933-11	RES-CHIP	22 5% 1/16W
IC7650	6-709-075-01	IC TPS5124DBTRG4		R7411	1-218-933-11	RES-CHIP	22 5% 1/16W
IC7651	6-709-075-01	IC TPS5124DBTRG4		R7413	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
IC7806	6-704-465-01	IC MC74LVX8053DTR2		R7414	1-218-938-11	RES-CHIP	56 5% 1/16W
IC7908	6-703-708-01	IC LM2903DT		R7415	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
IC8100	8-759-675-48	IC SN74LVC32APWR		R7416	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
IC8101	6-703-038-01	IC CD74HC4538PWR		R7417	1-218-938-11	RES-CHIP	56 5% 1/16W
IC8102	6-705-468-01	IC BA33BC0FP-E2		R7418	1-218-938-11	RES-CHIP	56 5% 1/16W
		< COIL >		R7419	1-218-938-11	RES-CHIP	56 5% 1/16W
L7321	1-414-751-11	INDUCTOR	1μH	R7421	1-218-959-11	RES-CHIP	3.3K 5% 1/16W
L7329	1-412-974-41	INDUCTOR	0.39μH	R7423	1-218-959-11	RES-CHIP	3.3K 5% 1/16W
L7650	1-424-922-21	INDUCTOR	10μH	R7426	1-218-965-11	RES-CHIP	10K 5% 1/16W
L7651	1-400-325-11	INDUCTOR	5.6μH	R7429	1-218-941-81	RES-CHIP	100 5% 1/16W
L7652	1-424-922-21	INDUCTOR	10μH	R7430	1-218-941-81	RES-CHIP	100 5% 1/16W
L7653	1-424-922-21	INDUCTOR	10μH	R7431	1-216-864-11	SHORT CHIP	0
L8600	1-412-973-11	INDUCTOR	0.33μH	R7432	1-216-864-11	SHORT CHIP	0
L8607	1-412-973-11	INDUCTOR	0.33μH	R7447	1-218-990-81	SHORT CHIP	0
L8608	1-412-974-41	INDUCTOR	0.39μH	R7449	1-218-990-81	SHORT CHIP	0
L8609	1-412-971-31	INDUCTOR	0.22μH	R7450	1-218-990-81	SHORT CHIP	0
L8610	1-412-974-41	INDUCTOR	0.39μH	R7460	1-208-683-11	METAL CHIP	1K 0.5% 1/16W
L8611	1-412-971-31	INDUCTOR	0.22μH	R7462	1-218-690-11	METAL CHIP	820 0.5% 1/10W
		< TRANSISTOR >		R7463	1-218-690-11	METAL CHIP	820 0.5% 1/10W
Q7651	6-709-438-01	TRANSISTOR FDS6986AS-NL		R7464	1-218-710-11	METAL CHIP	5.6K 0.5% 1/10W
Q7652	6-709-438-01	TRANSISTOR FDS6986AS-NL		R7465	1-218-710-11	METAL CHIP	5.6K 0.5% 1/10W
Q7653	6-709-438-01	TRANSISTOR FDS6986AS-NL		R7466	1-218-990-81	SHORT CHIP	0
Q7654	6-709-438-01	TRANSISTOR FDS6986AS-NL		R7474	1-218-665-11	METAL CHIP	75 0.5% 1/10W
Q7804	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R7477	1-218-665-11	METAL CHIP	75 0.5% 1/10W
Q7805	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R7478	1-218-665-11	METAL CHIP	75 0.5% 1/10W
		< RESISTOR >		R7479	1-218-665-11	METAL CHIP	75 0.5% 1/10W
R7304	1-218-965-11	RES-CHIP	10K 5% 1/16W	R7480	1-218-665-11	METAL CHIP	75 0.5% 1/10W
R7305	1-218-953-11	RES-CHIP	1K 5% 1/16W	R7481	1-218-665-11	METAL CHIP	75 0.5% 1/10W
R7318	1-218-941-81	RES-CHIP	100 5% 1/16W	R7482	1-218-665-11	METAL CHIP	75 0.5% 1/10W
R7319	1-218-990-81	SHORT CHIP	0	R7501	1-208-927-11	METAL CHIP	47K 0.5% 1/16W
R7321	1-218-941-81	RES-CHIP	100 5% 1/16W	R7502	1-218-965-11	RES-CHIP	10K 5% 1/16W
R7322	1-218-941-81	RES-CHIP	100 5% 1/16W	R7503	1-218-953-11	RES-CHIP	1K 5% 1/16W
R7323	1-218-446-11	METAL CHIP	1 5% 1/10W	R7506	1-218-977-11	RES-CHIP	100K 5% 1/16W
R7336	1-218-953-11	RES-CHIP	1K 5% 1/16W	R7508	1-218-953-11	RES-CHIP	1K 5% 1/16W
R7342	1-218-990-81	SHORT CHIP	0	R7509	1-218-933-11	RES-CHIP	22 5% 1/16W
				R7510	1-218-953-11	RES-CHIP	1K 5% 1/16W
				R7517	1-216-835-11	METAL CHIP	15K 5% 1/10W
				R7518	1-216-835-11	METAL CHIP	15K 5% 1/10W
				R7519	1-216-835-11	METAL CHIP	15K 5% 1/10W
				R7520	1-216-835-11	METAL CHIP	15K 5% 1/10W
				R7521	1-218-938-11	RES-CHIP	56 5% 1/16W
				R7522	1-218-938-11	RES-CHIP	56 5% 1/16W
				R7523	1-218-938-11	RES-CHIP	56 5% 1/16W
				R7524	1-218-938-11	RES-CHIP	56 5% 1/16W



QM

QT

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
RB7302	1-234-370-21	RES, NETWORK 22	(1005X4)	C7832	1-162-964-11	CERAMIC CHIP 0.001μF	10% 50V
RB7303	1-234-370-21	RES, NETWORK 22	(1005X4)	C7833	1-107-826-11	CERAMIC CHIP 0.1μF	10% 16V
RB7310	1-234-378-21	RES, NETWORK 10K	(1005X4)	C7841	1-107-826-11	CERAMIC CHIP 0.1μF	10% 16V
RB7323	1-234-370-21	RES, NETWORK 22	(1005X4)	C7842	1-117-681-11	ELECT CHIP 100μF	20% 16V
RB7325	1-234-370-21	RES, NETWORK 22	(1005X4)	C7844	1-162-917-11	CERAMIC CHIP 15pF	5% 50V
RB7326	1-234-370-21	RES, NETWORK 22	(1005X4)	C7845	1-162-917-11	CERAMIC CHIP 15pF	5% 50V
RB7327	1-234-370-21	RES, NETWORK 22	(1005X4)	C7847	1-162-905-11	CERAMIC CHIP 1pF	0.25pF50V
RB7328	1-234-370-21	RES, NETWORK 22	(1005X4)	C7849	1-162-905-11	CERAMIC CHIP 1pF	0.25pF50V
RB7333	1-234-714-11	RES, NETWORK 56	(1005X4)	C7851	1-162-917-11	CERAMIC CHIP 15pF	5% 50V
RB7334	1-234-714-11	RES, NETWORK 56	(1005X4)	C7852	1-162-917-11	CERAMIC CHIP 15pF	5% 50V
RB7335	1-234-714-11	RES, NETWORK 56	(1005X4)	C7853	1-162-921-11	CERAMIC CHIP 33pF	5% 50V
RB7336	1-234-714-11	RES, NETWORK 56	(1005X4)	C7854	1-162-921-11	CERAMIC CHIP 33pF	5% 50V
RB7337	1-234-714-11	RES, NETWORK 56	(1005X4)	C7855	1-162-921-11	CERAMIC CHIP 33pF	5% 50V
RB7338	1-234-714-11	RES, NETWORK 56	(1005X4)	C7856	1-162-921-11	CERAMIC CHIP 33pF	5% 50V
RB7339	1-234-714-11	RES, NETWORK 56	(1005X4)	C7857	1-162-921-11	CERAMIC CHIP 33pF	5% 50V
RB7340	1-234-714-11	RES, NETWORK 56	(1005X4)	C7858	1-162-921-11	CERAMIC CHIP 33pF	5% 50V
RB7410	1-234-370-21	RES, NETWORK 22	(1005X4)	C7859	1-162-921-11	CERAMIC CHIP 33pF	5% 50V
RB7914	1-234-370-21	RES, NETWORK 22	(1005X4)	C7860	1-162-921-11	CERAMIC CHIP 33pF	5% 50V
RB7915	1-234-370-21	RES, NETWORK 22	(1005X4)	C7896	1-162-964-11	CERAMIC CHIP 0.001μF	10% 50V
RB7916	1-234-370-21	RES, NETWORK 22	(1005X4)			< CONNECTOR >	
RB7917	1-234-370-21	RES, NETWORK 22	(1005X4)				
RB7921	1-234-370-21	RES, NETWORK 22	(1005X4)				
RB7922	1-234-370-21	RES, NETWORK 22	(1005X4)	CN7800	1-819-390-51	FFC/FPC CONNECTOR (ZIF) 49P	
RB7923	1-234-370-21	RES, NETWORK 22	(1005X4)			< DIODE >	
RB7924	1-234-370-21	RES, NETWORK 22	(1005X4)				
		< VIBRATOR >		D7801	8-719-977-28	DIODE DTZ10B	
X7300	1-813-758-21	VIBRATOR, CRYSTAL				< EARTH TERMINAL >	
X7301	1-813-761-21	VIBRATOR, CRYSTAL					
*****							
A-1206-154-A QT BOARD, COMPLETE							
*****							
		< CAPACITOR >				< FERRITE BEAD >	
C7800	1-137-765-21	ELECT CHIP 47μF	20% 16V	FB7800	1-400-180-21	FERRITE 0μH	
C7801	1-128-396-11	ELECT CHIP 470μF	20% 10V	FB7801	1-400-089-21	FERRITE 0μH	
C7802	1-115-566-11	CERAMIC CHIP 4.7μF	10% 10V	FB7802	1-414-229-11	FERRITE 0μH	
C7803	1-107-826-11	CERAMIC CHIP 0.1μF	10% 16V	FB7803	1-414-229-11	FERRITE 0μH	
C7805	1-107-826-11	CERAMIC CHIP 0.1μF	10% 16V	FB7804	1-414-229-11	FERRITE 0μH	
C7806	1-127-820-11	CERAMIC CHIP 4.7μF	10% 16V	FB7805	1-414-229-11	FERRITE 0μH	
C7807	1-137-765-21	ELECT CHIP 47μF	20% 16V	FB7806	1-414-226-21	FERRITE 0μH	
C7808	1-162-995-11	CERAMIC CHIP 0.022μF	50V	FB7807	1-414-226-21	FERRITE 0μH	
C7809	1-162-995-11	CERAMIC CHIP 0.022μF	50V	FB7808	1-414-760-21	FERRITE 0μH	
C7810	1-127-820-11	CERAMIC CHIP 4.7μF	10% 16V	FB7811	1-414-760-21	FERRITE 0μH	
C7811	1-107-826-11	CERAMIC CHIP 0.1μF	10% 16V	FB7873	1-414-385-11	FERRITE 0μH	
C7812	1-128-996-11	ELECT CHIP 4.7μF	20% 50V	FB7874	1-414-385-11	FERRITE 0μH	
C7813	1-165-319-11	CERAMIC CHIP 0.1μF	50V	FB7875	1-414-226-21	FERRITE 0μH	
C7816	1-128-996-11	ELECT CHIP 4.7μF	20% 50V	FB7876	1-414-226-21	FERRITE 0μH	
C7819	1-137-765-21	ELECT CHIP 47μF	20% 16V	FB7877	1-414-226-21	FERRITE 0μH	
C7820	1-100-588-21	ELECT CHIP 1000μF	20% 6.3V	FB7878	1-414-226-21	FERRITE 0μH	
C7821	1-128-996-11	ELECT CHIP 4.7μF	20% 50V	FB7879	1-414-760-21	FERRITE 0μH	
C7822	1-128-396-11	ELECT CHIP 470μF	20% 10V	FB7880	1-414-760-21	FERRITE 0μH	
C7823	1-162-970-11	CERAMIC CHIP 0.01μF	10% 25V			< IC >	
C7824	1-162-970-11	CERAMIC CHIP 0.01μF	10% 25V	IC7800	6-708-171-01	IC MIC5235YM5TR	
C7825	1-125-889-91	CERAMIC CHIP 2.2μF	10% 10V	IC7801	8-749-925-00	IC TK11819MTL	
C7826	1-162-995-11	CERAMIC CHIP 0.022μF	50V			< COIL >	
C7827	1-162-970-11	CERAMIC CHIP 0.01μF	10% 25V				
C7828	1-162-964-11	CERAMIC CHIP 0.001μF	10% 50V	L7800	1-414-755-11	INDUCTOR 22μH	
C7829	1-162-964-11	CERAMIC CHIP 0.001μF	10% 50V	L7801	1-412-642-61	INDUCTOR 1.2mH	
C7831	1-164-156-11	CERAMIC CHIP 0.1μF	25V				





REF. NO.	PART NO.	DESCRIPTION	REMARK
L7802	1-414-755-11	INDUCTOR 22μH	
L7803	1-414-754-11	INDUCTOR 10μH	
L7804	1-414-754-11	INDUCTOR 10μH	
L7805	1-414-754-11	INDUCTOR 10μH	
L7806	1-414-754-11	INDUCTOR 10μH	
< TRANSISTOR >			
Q7800	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q7801	8-729-600-22	TRANSISTOR 2SA1235-F	
Q7802	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q7803	8-729-047-14	TRANSISTOR 2SC3775	
< RESISTOR >			
R7814	1-216-864-11	SHORT CHIP 0	
R7815	1-216-864-11	SHORT CHIP 0	
R7816	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R7817	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R7818	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R7819	1-216-295-91	SHORT CHIP 0	
R7820	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R7821	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R7822	1-216-809-11	METAL CHIP 100 5% 1/10W	
R7824	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	
R7825	1-218-891-11	METAL CHIP 68K 0.5% 1/10W	
R7826	1-218-911-11	METAL CHIP 470K 0.5% 1/10W	
R7829	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R7831	1-216-845-11	METAL CHIP 100K 5% 1/10W	
R7837	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R7839	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R7841	1-216-835-11	METAL CHIP 15K 5% 1/10W	
R7842	1-216-809-11	METAL CHIP 100 5% 1/10W	
R7848	1-216-864-11	SHORT CHIP 0	
R7849	1-218-895-11	METAL CHIP 100K 0.5% 1/10W	
R7850	1-216-864-11	SHORT CHIP 0	
R7852	1-216-864-11	SHORT CHIP 0	
R7853	1-216-864-11	SHORT CHIP 0	
R7858	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R7860	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R7862	1-216-864-11	SHORT CHIP 0	
R7863	1-216-864-11	SHORT CHIP 0	
R7864	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R7865	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R7866	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R7867	1-216-864-11	SHORT CHIP 0	
R7869	1-216-819-11	METAL CHIP 680 5% 1/10W	
R7879	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R7880	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R7881	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R7882	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R7901	1-216-864-11	SHORT CHIP 0	
R7902	1-216-864-11	SHORT CHIP 0	
R7907	1-216-819-11	METAL CHIP 680 5% 1/10W	
R7908	1-216-819-11	METAL CHIP 680 5% 1/10W	
R7909	1-216-833-11	METAL CHIP 10K 5% 1/10W	
< TUNER >			
TU7800	8-597-561-00	TUNER, FSS BTF-CA401Z	

\*\*\*\*\*

REF. NO.	PART NO.	DESCRIPTION	REMARK
		A-1166-582-A S1 BOARD, COMPLETE	*****
< CAPACITOR >			
C3150	1-100-597-91	CERAMIC CHIP 0.1μF 10% 25V	
C3151	1-165-908-11	CERAMIC CHIP 1μF 10% 10V	
C3152	1-162-915-11	CERAMIC CHIP 10pF 0.50PF 50V	
C3153	1-162-915-11	CERAMIC CHIP 10pF 0.50PF 50V	
< CONNECTOR >			
CN3150	1-819-473-11	HEADER ASSEMBLY FOR PWB 4P	
< IC >			
IC3150	6-706-815-01	IC TMP75AIDR	
< RESISTOR >			
R3151	1-216-801-11	METAL CHIP 22 5% 1/10W	
R3152	1-216-801-11	METAL CHIP 22 5% 1/10W	
R3154	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R3156	1-216-864-11	SHORT CHIP 0	
R3158	1-216-864-11	SHORT CHIP 0	
*****			
		A-1166-583-A S2 BOARD, COMPLETE	*****
< CAPACITOR >			
C3200	1-100-597-91	CERAMIC CHIP 0.1μF 10% 25V	
C3201	1-165-908-11	CERAMIC CHIP 1μF 10% 10V	
C3202	1-162-915-11	CERAMIC CHIP 10pF 0.50PF 50V	
C3203	1-162-915-11	CERAMIC CHIP 10pF 0.50PF 50V	
< IC >			
IC3200	6-706-815-01	IC TMP75AIDR	
< RESISTOR >			
R3201	1-216-801-11	METAL CHIP 22 5% 1/10W	
R3202	1-216-801-11	METAL CHIP 22 5% 1/10W	
R3204	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R3205	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R3206	1-216-864-11	SHORT CHIP 0	
*****			
		A-1166-584-A T BOARD, COMPLETE	*****
*****			

Les composants identifiés par une trame et une marque  $\Delta$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark  $\Delta$  are critical for safety. Replace only with part number specified.

<u>REF. NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>REMARK</u>
		MISCELLANEOUS *****	
	$\Delta$ 1-417-716-11	ANTENNA SW	
	$\Delta$ 1-474-012-21	POWER SUPPLY BLOCK	
	$\Delta$ 1-787-333-11	D.C. FAN	
	$\Delta$ 1-827-159-21	CORD, AC POWER (WITH CONNECTOR)	
	1-826-475-11	LOUDSPEAKER (6.5X13cm)	
	1-833-203-11	LEAD WIRE WITH CONNECTOR (LVDS)	
	1-910-028-26	CONNECTOR ASSY 20P	
	$\Delta$ 1-910-028-27	CONNECTOR ASSY 2P (including temperature fuse)	
	$\Delta$ 8-835-860-31	MOTOR, DC SFF21C/C-NP	
	$\Delta$ 8-835-873-11	MOTOR, DC SFF24A/C-NP	
	$\Delta$ A-1203-194-A	OPTICS BLOCK ASSY (A60)	(60A2020)
	$\Delta$ A-1203-195-A	OPTICS BLOCK ASSY (A55)	(55A2020)
	$\Delta$ A-1203-196-A	OPTICS BLOCK ASSY (A50)	(50A2020)
*****			
		ACCESSORIES *****	
	3-198-047-11	MANUAL, INSTRUCTION	
	3-198-047-21	MANUAL, INSTRUCTION	
		< REMOTE COMMANDER >	
	1-479-827-11	REMOTE COMMANDER (RM-YD010)	
	9-885-105-14	COVER, SLIDE (FOR RM-YD010)	
	9-885-105-15	COVER, BATTERY	
		< OPTIONAL ACESORY >	
	93-0886-00	LAMP XL-5200	