

2769

SERVICE MANUAL

DA - 1 CHASSIS




<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>
KV-32XBR100	RM-Y128	US	SCC-H87A-A
KV-32XBR100	RM-Y128	Canadian	SCC-H88A-A

<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>
--------------	------------------	--------------	--------------------

Note :

1. Adjustment Manual for this model is separately published.

Adjustment Manual	
Part No.	9-965-067-01

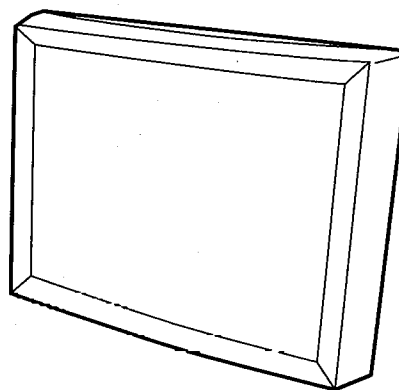

TRINITRON® COLOR TV
SONY®

※ Please file according to model size. ... ■

SPECIFICATIONS

Television system	American TV standards	Speaker	Tweeter 25 mm (1 inch) x 2
Channel coverage	VHF : 2 - 13		Woofers (M) : 80 mm (3 1/4 inches) x 2
	UHF : 14 - 69		Woofers (L) : 80 mm (3 1/4 inches)
	CATV : 1 - 125		Mid-range : 50 mm (2 inches) x 2
Picture tube	Super Trinitron® tube		Passive : 100 mm (4 inches)
	32-inch picture measured diagonally	Speaker output	Front : 11 W x 2
Antenna	75-ohm external antenna terminal for VHF/UHF		Woofers : 11 W x 2
Input (Monitor unit)	MULTIINPUT (36-pin)	Power requirement	120 V, 60 Hz
Inputs/Outputs (Feature box)	MULTIOUTPUT (36-pin)	Power consumption	Monitor unit
	VIDEO 1/3/4/5 IN and		Max. 225 W (2.8 A)
	VIDEO 2 INPUT		Standby mode : 1.5 W
	S VIDEO IN (4-pin mini DIN) :		Feature box
	Y : 1 Vp-p, 75-ohms unbalance, sync negative		Max. 26 W
	C : 0.286 Vp-p (Burst signal), 75-ohms	Dimensions (W/H/D)	Standby mode : 13 W
	VIDEO (phono jack) : 1 Vp-p, 75-ohms unbalance, sync negative		Monitor unit :
	AUDIO (phono jack) : 500 m Vrms (100% modulation), Impedance : 47 kilohms		828 x 632.6 x 586.1 mm
	SELECT OUT		(32 3/8 x 24 5/8 x 23 1/8 inches)
	VIDEO (phono jack) : 1 Vp-p, 75-ohms unbalanced, sync negative	Mass	Feature box :
	AUDIO (phono jack) : 470 m Vrms (100% modulation), Impedance : 75 kilohms		430 x 82 x 275 mm
	AUDIO (VAR) OUT (phono jack) : 950 m Vrms (100% modulation), Impedance : 5 kilohms	Supplied accessories	(17 x 3 1/4 x 10 7/8 inches)
	AUDIO (FIX) OUT (phono jack) : 470 m Vrms, Impedance : 5 kilohms		Monitor unit : 755 kg (166 lbs 7 oz)
	CONTROL S IN/OUT mini jacks		Feature box : 4.0 kg (8 lbs 13 oz)
		Optional accessories	Remote Commander RM-Y128 (1)
			Size AA (R6) battery (2)
			36-pin multi-cable (1)
			Terminal cover (1)
			TV stand SU-32XBR4
			U/V mixer EAC-66
			Connecting cables RK-74A,
			VMC-810S/820S, YC-15V/30V,
			VMC-720M, RK-C34

Design and specifications are subject to change without notice.

SAFETY CHECK-OUT

(US model only)

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are "pinched" or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, through functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the condition of the monopole antenna (if any). Make sure the end is not broken off, and has the plastic cap on it. Point out the danger of impalement on a broken antenna to the customer, and recommend the antenna's replacement.
8. Check the B+ and HV to see they are at the values specified. Make sure your instruments are accurate; be suspicious of your HV meter if sets always have low HV.
9. Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)

HOW TO FIND A GOOD EARTH GROUND

A cold-water pipe is guaranteed earth ground; the cover-plate retaining screw on most AC outlet boxes is also at earth ground. If the retaining screw is to be used as your earth-ground, verify that it is at ground by measuring the resistance between it and a cold-water pipe with an ohmmeter. The reading should be zero ohms. If a cold-water pipe is not accessible, connect a 60-100 watts trouble light (not a neon lamp) between the hot side of the receptacle and the retaining screw. Try both slots, if necessary, to locate the hot side of the line, the lamp should light at normal brilliance if the screw is at ground potential. (See Fig. B)

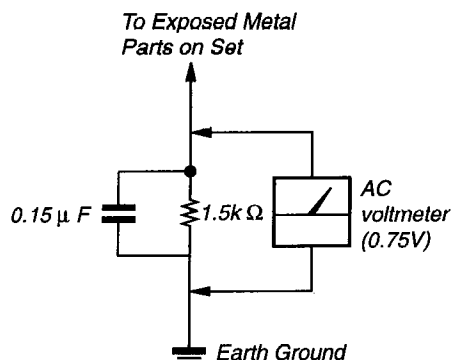


Fig. A. Using an AC voltmeter to check AC leakage.

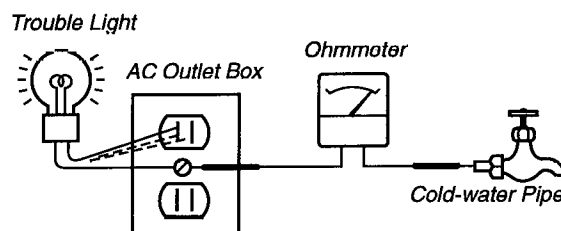


Fig. B. Checking for earth ground.

TABLE OF CONTENTS

Section	Title	Page	Section	Title	Page
1. GENERAL					
	Step 1 : Installing the TV	5		Block Diagrams (4)	29
	Step 4 : Setting Up the TV Automatically (AUTO SET UP)	8	4-2.	Circuit Boards Location	35
2. DISASSEMBLY			4-3.	Printed Wiring Board and Schamatic Diagrams	35
2-1.	Rear Cover and Speaker Horn Removal	9		• AB (1/2) Board	39
2-2.	Chassis Assy Removal	9		• AB (2/2) Board	43
2-3.	U Block Removal	9		• HB Board	47
2-4.	B and U Boards Removal	9		• HC Board	47
2-5.	Extension Cable	10		• M Board	51
2-6.	AA Board and G Board Removal	10		• B Board	56
2-7.	Service Position	10		• Q Board	65
2-8.	Service-use input terminal	10		• AA Board	69
2-9.	Picture Tube Removal	11		• X (1/2) Board	77
2-10.	Upper Case Removal	12		• X (2/2) Board	83
2-11.	HB and HC Boards Removal	12		• HA Board	87
2-12.	Rear Panel Removal	12		• ZA Board	87
2-13.	AB, F and X Boards Removal	12		• ZB Board	87
2-14.	Extension Cable	12		• D Board	91
				• U Board	93
				• V Board	94
				• G Board	96
				• F Board	99
				• C Board	99
3. SAFETY RELATED ADJUSTMENTS		13	4-4.	Semiconductions	104
4. DIAGRAMS			5. EXPLODED VIEWS		
4-1.	Block Diagrams (1)	17	5-1.	Chassis	106
	Block Diagrams (2)	21	5-2.	Picture Tube	107
	Block Diagrams (3)	25	5-3.	Tuner	108
			6. ELECTRICAL PARTS LIST		109

(CAUTION)

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

WARNING!!

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.

THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK Δ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL TO SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

(ATTENTION)

APRES AVOIR DECONNECTE LE CAP DE L'ANODE, COURT-CIRCUITER L'ANODE DU TUBE CATHODIQUE ET CELUI DE L'ANODE DU CAP AU CHASSIS METALLIQUE DE L'APPAREIL, OU AU COUCHE DE CARBONE PEINTE SUR LE TUBE CATHODIQUE OU AU BLINDAGE DU TUBE CATHODIQUE.

ATTENTION!!

AFIN D'EVITER TOUT RISQUE DE ELECTROCUTION PROVENANT D'UN CHÂSSIS SOUS TENSION, UN TRANSFORMATEUR D'ISOLEMENT DOIT ETRE UTILISÉ LORS DE TOUT DEPANNAGE. LE CHÂSSIS DE CE RECEPTEUR EST DIRECTEMENT RACCORDÉ À L'ALIMENTATION SECTEUR.

ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET PAR UNE MAPQUE Δ SUR LES SCHÉMAS DE PRINCIPE, LES VUES EXPLODÉES ET LES LISTES DE PIÉCES CONT D'UNE IMPORTANCE CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT. NE LES REMPLACER QUE PAR DES COMPOSANTS SONY DONT LE NUMÉRO DE PIÉCE EST INDIQUÉ DANS LE PRÉSENT MANUEL OU DANS DES SUPPLÉMENTS PUBLIÉS PAR SONY. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.

SECTION 1 GENERAL


The operating instructions mentioned here are partial abstracts from the Operating Instruction Manual. The page numbers of the Operating Instruction Manual remain as in the manual.

Getting Started

Step 1 : Installing the TV

Your TV is composed of two components, the Monitor unit and the Feature box.


Before using your TV, connect the two components. Connect the MULTI INPUT connector on the Monitor unit to the MULTI OUTPUT connector on the Feature box with the supplied 36-pin multi-cable. Then cover the connectors with the supplied terminal cover.

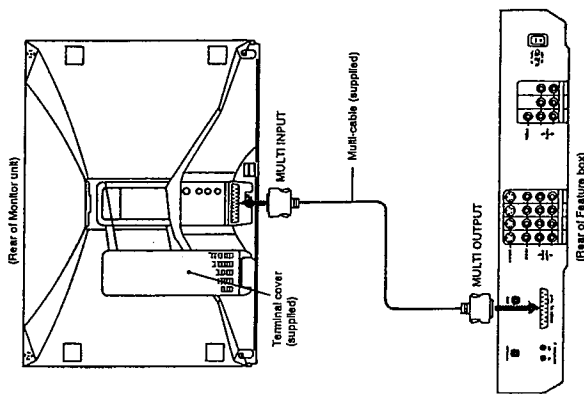

Without a cable box

To an S video equipped VCR


If your VCR has an S video output jack, make the connection as follows. Whenever you connect the cable to the S VIDEO connector, the TV automatically receives S video signals.

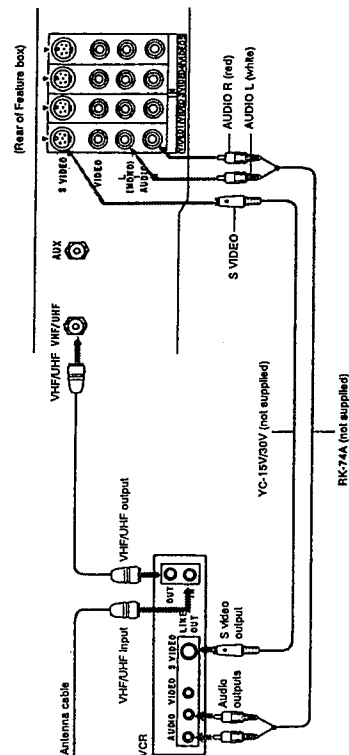

Note

•Video signals are composed of Y (luminance) and C (chroma) signals. The S connection sends the two signals separately preventing degradation, and gives better picture quality compared to conventional connection.


With a cable box

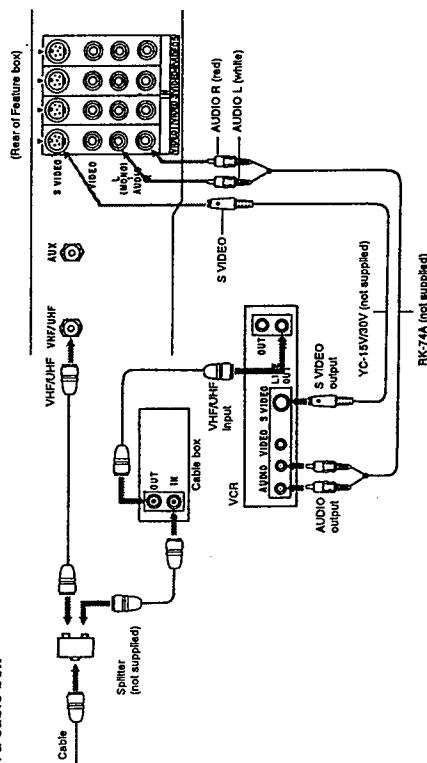

Connecting a DSS receiver

For connection details, see the instruction manual of the DSS receiver.


To a TV

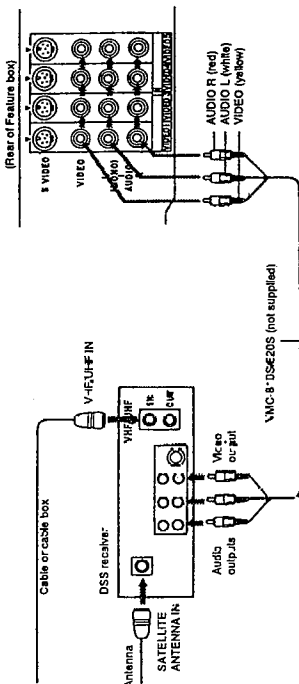

Note


- You can use the S VIDEO jack or the composite video jack for video connection.

To a TV and VCR

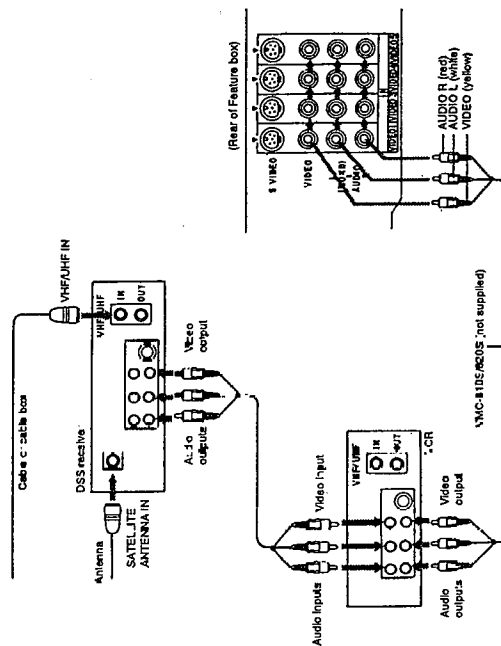

Connecting a camcorder

This connection is convenient for watching a picture from a camcorder.

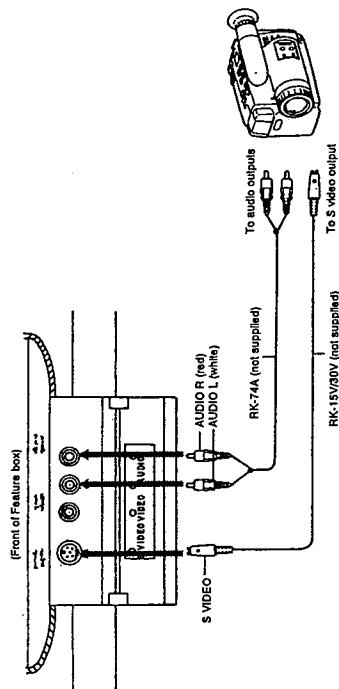


Notes

- To connect a monaural camcorder, connect the audio output of the camcorder to AUDIO L (MONO) of VIDEO 2 INPUT on the feature box.
- To connect camcorder not equipped with the S video output, connect the video output of the camcorder to VIDEO INPUT of the feature box.

Connecting two VCRs for tape editing

You can select the output signal from the SELECT OUT jacks. For detailed information, see page 29.

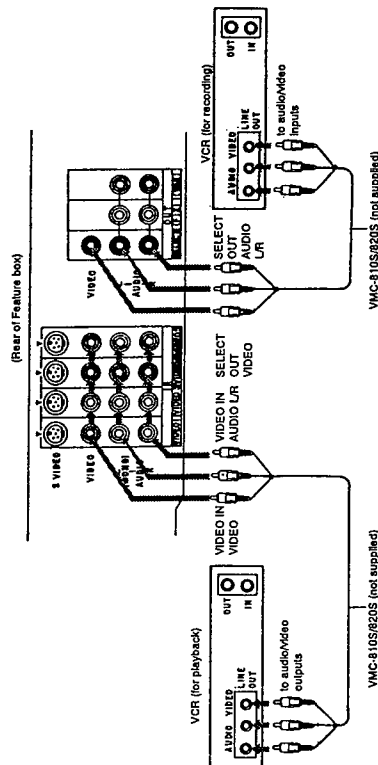


Getting started

Getting started

Connecting an audio system

When connecting audio equipment, see page 27 for more information.

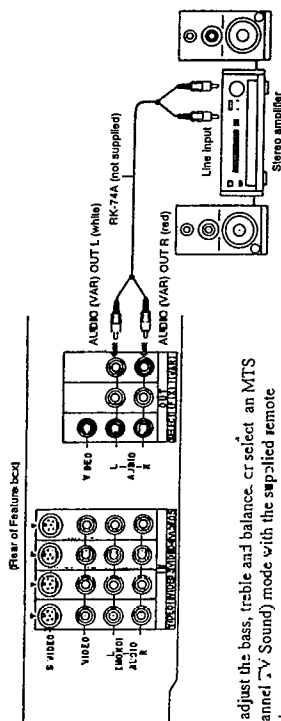


Note

- You can adjust the bass, treble and balance, or select an MTS (Multichannel TV Sound) mode with the supplied remote commander.

To connect a Sony SA-VA series speaker system

If you have a Sony SA-VA series speaker system, connect your speakers to the AUDIO (FIX) OUT L/R jacks on the feature box with the audio cable supplied with the speakers. You can take advantage of the speakers' Dolby Pro Logic® surround system and super woofer mode, and control them with the supplied remote commander.


Manufactured under license from Dolby Laboratories Licensing Corporation. Additionally licensed under one or more of the following patents: U.S. number 2,632,886, 3,745,792 and 3,959,590. "Dolby" and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.

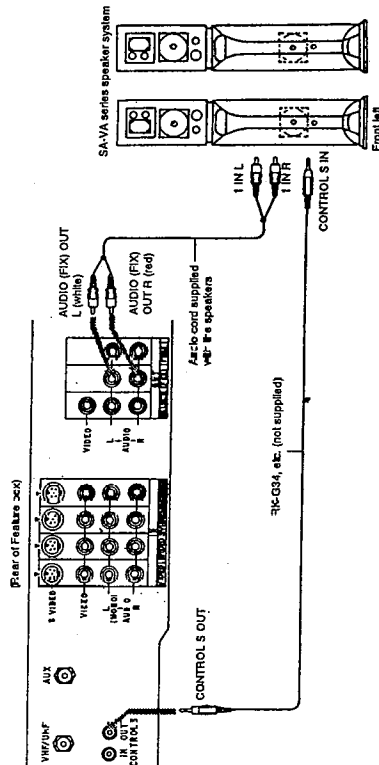

Getting Started

Connecting an AV receiver

Connect an optional AV receiver to the VIDEO 1 IN jacks at the rear of the feature box. For detailed information, see page 29.

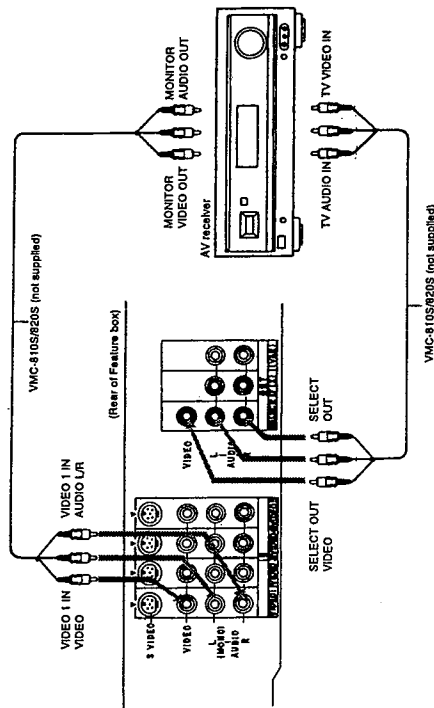


Connecting other Sony equipment with the CONTROL S jacks

This feature allows you to control your TV and other Sony equipment with one remote commander.

Notes

- To control other Sony equipment with the TV's remote commander, connect the input of the equipment to CONTROL S OUT jack on the feature box.
- To control the TV with the remote commander of other Sony equipment, connect the output of the equipment to CONTROL S IN jack on the feature box.



Getting Started


Step 4 : Setting up the TV automatically (AUTO SET UP)

For the customers who connect a cable box, skip this step and proceed to "Selecting the cable box output channel (TV INPUT)" (page 18).

You can set up your TV easily by using AUTO SET UP feature. It changes the on-screen menu language and presets all the receivable channels automatically. To set up the TV manually, see "Changing the menu language" (page 17) "Setting cable TV on or off" (page 16) and "Presetting channels" (page 17).

If the TV is set to a video input, you cannot execute AUTO SET UP. Press TV/VIDEO so that a channel number appears.

The touch keys on the Monitor unit illuminate if the sensor of the Monitor unit detects you. You cannot control the keys which do not illuminate with the exception of the POWER switch.




1 Press POWER to turn TV on.




Getting Started

2 Press SET UP on the front of the TV.




3 Press CHANNEL+.

If you prefer Spanish or French to English, you can change the on-screen menu language. Press CHANNEL - for Spanish or VOLUME + for French.



All of the menus will be set to the factory preset condition in the selected language.

4 Press CHANNEL+.



"AUTO PROGRAM" appears on the screen and the TV starts scanning and presetting channels automatically. When all the receivable channels are stored, "AUTO PROGRAM" disappears and the lowest numbered channel is displayed. If the TV receives cable TV channels, CABLE is set to ON automatically.


Notes

- If more than 90seconds elapse after you press a button, the menu disappears automatically.
- In case of using the AUX connector, press the TV/VIDEO button on the remote commander first so that "AUX" is displayed beside the channel number on the screen. Then follow steps 2 to 4 above to perform AUTO SET UP.



To preview the main functions (DEMO)

Press VOLUME-in step 2. The functions and menus are displayed one by one.


2-5. EXTENSION CABLE

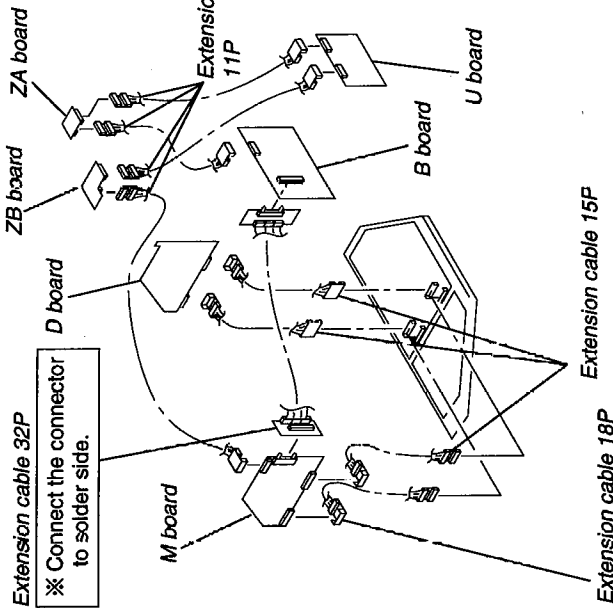

2-7. SERVICE POSITION

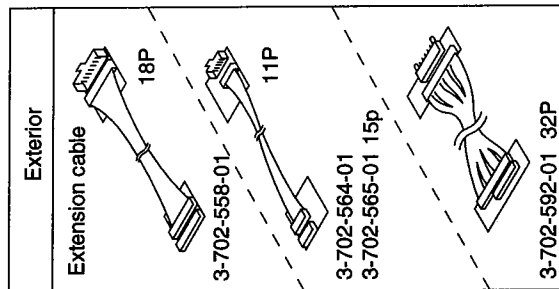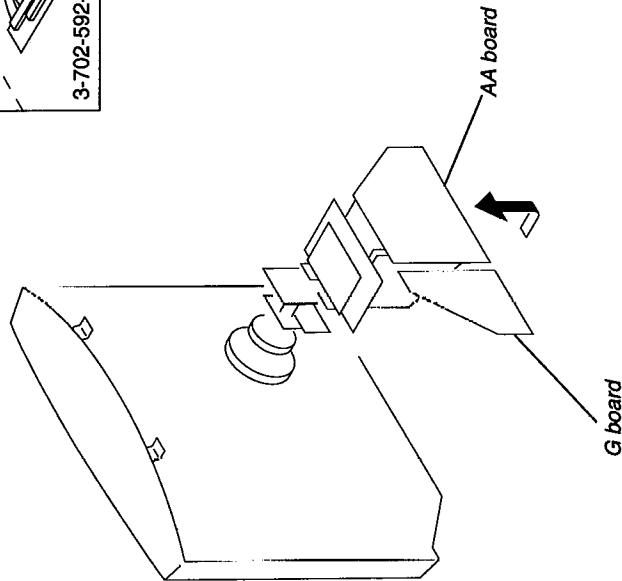


2-6. AA AND G BOARD REMOVAL

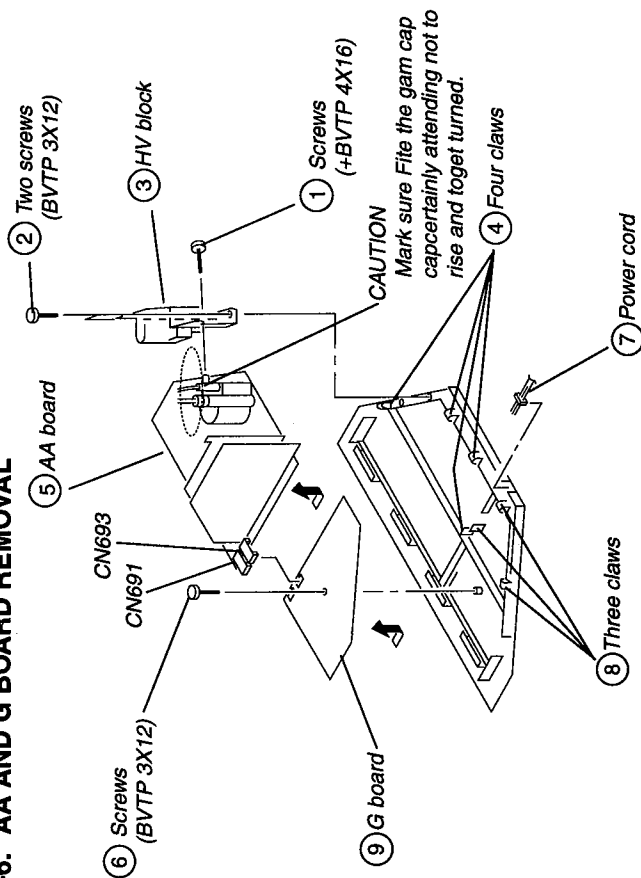

2-8. SERVICE-USE INPUT TERMINALS


KV-32XBR100 has service-use input terminals for trouble shooting or repair of the set. The terminals consist of a system each of video, s-video, and audio input.

The input terminals are automatically switched to those systems once the multi - cable is disconnected from the featur box please note that those input terminals are limited to service use only but not to ordinary use.




SECTION 2 DISASSEMBLY


2-1. REAR COVER AND SPEAKER HORN REMOVAL

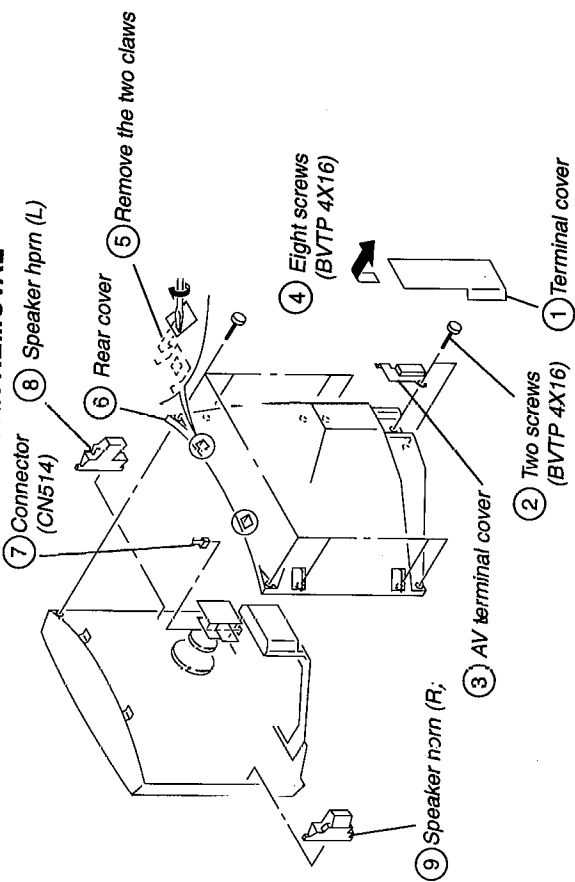


2-3. U BLOCK REMOVAL

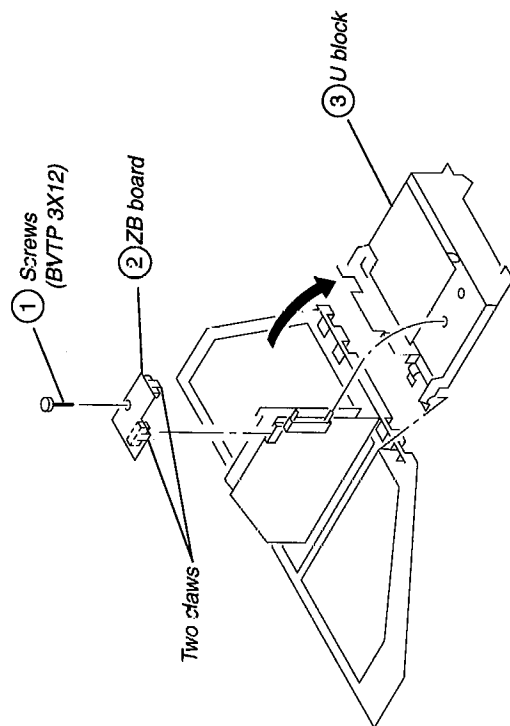

2-2. CHASSIS ASSY REMOVAL

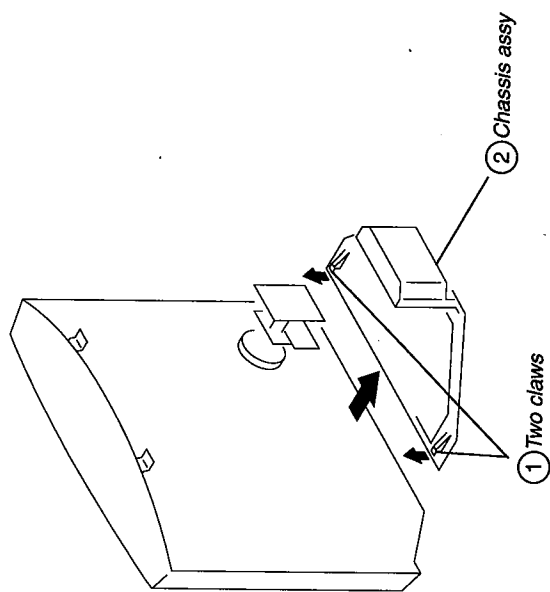

2-4. B AND U BOARD REMOVAL

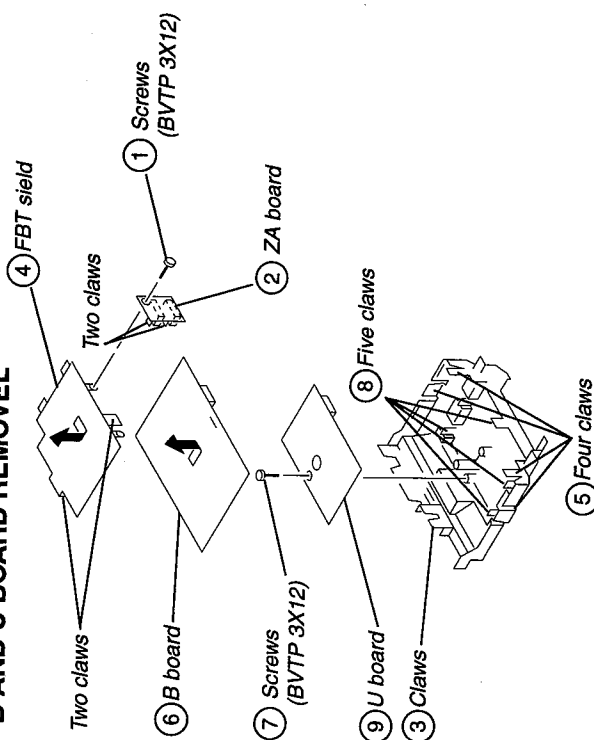


2-9. PICTURE TUBE REMOVAL

WARNING : Before removing anode cap

H. V. remains in the CRT even after the power is disconnected.


To avoid electrical shock, before attempting to remove the anode cap, discharge CRT : Short between anode and CRT coated earth ground strap.

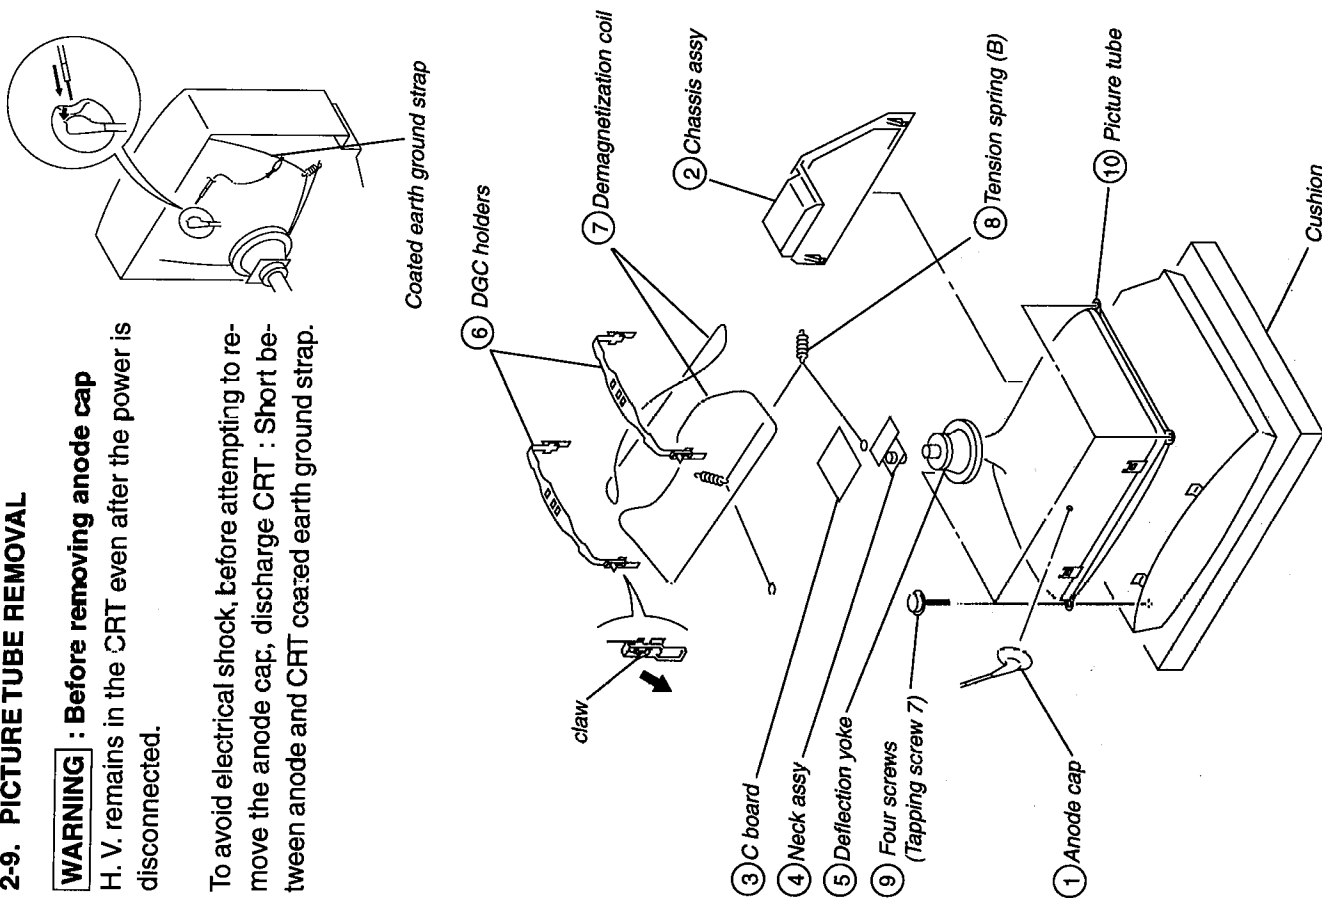


• REMOVAL OF ANODE-CAP

NOTE : Short circuit the anode of the picture tube and the anode cap to the metal chassis. CRT shield or carbon painted on the CRT, after removing the anode.


• REMOVING PROCEDURES

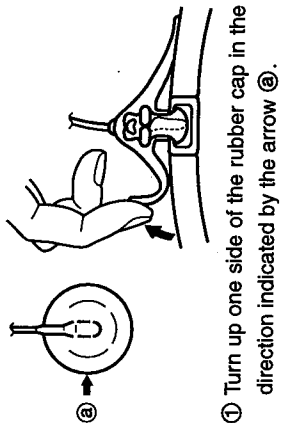

① Turn up one side of the rubber cap in the direction indicated by the arrow ①.

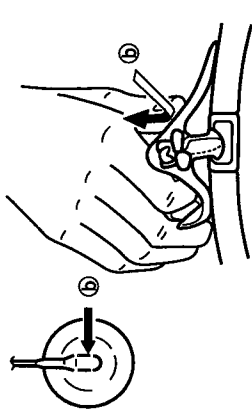



② Using a thumb pull up the rubber cap firmly in the direction indicated by the arrow ②.




③ When one side of the rubber cap is separated from the anode button, the anode-cap can be removed by turning up the rubber cap and pulling up it in the direction of the arrow ③.

• HOW TO HANDLE AN ANODE-CAP


- ① Don't hurt the surface of anode-caps with sharp shaped material!
- ② Don't press the rubber hardly not to hurt inside of anode-caps! A material fitting called as shatter-hook terminal is built in the rubber.
- ③ Don't turn the foot of rubber over hardly! The shatter-hook terminal will stick out or hurt the rubber.




2-10. UPPER CASE REMOVAL

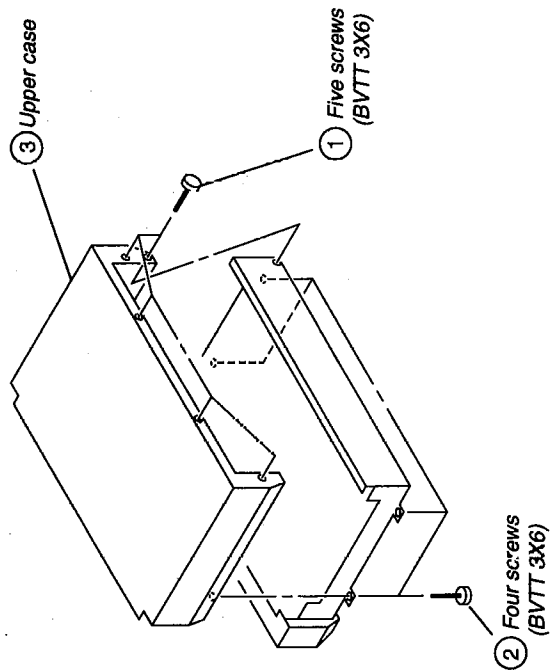


2-11. HB AND HC BOARDS REMOVAL

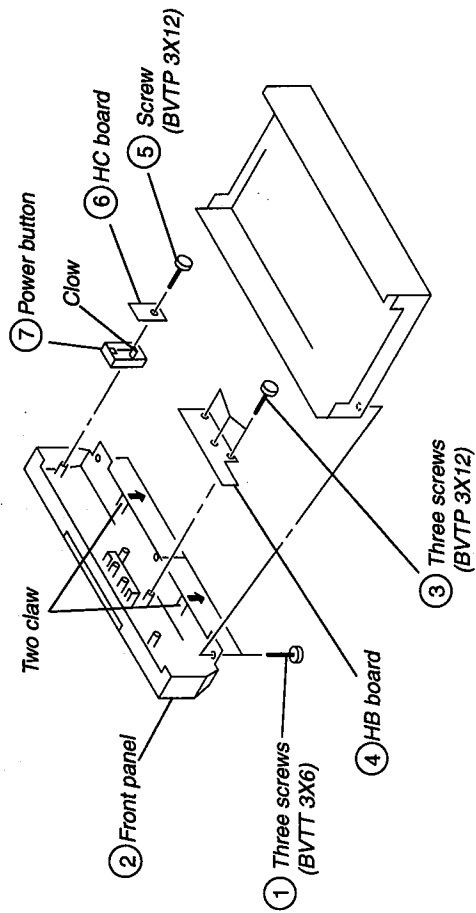


2-12. REAR PANEL REMOVAL

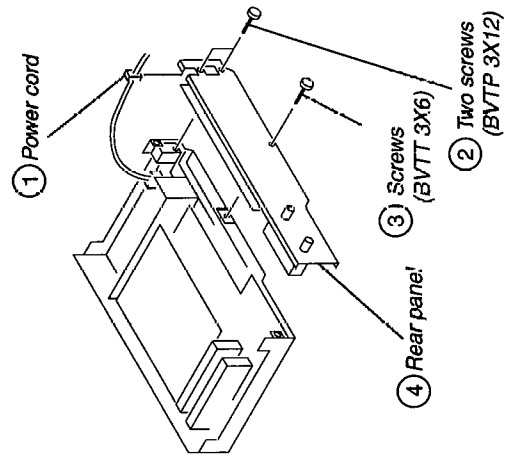

2-13. AB, F AND X BOARDS REMOVAL

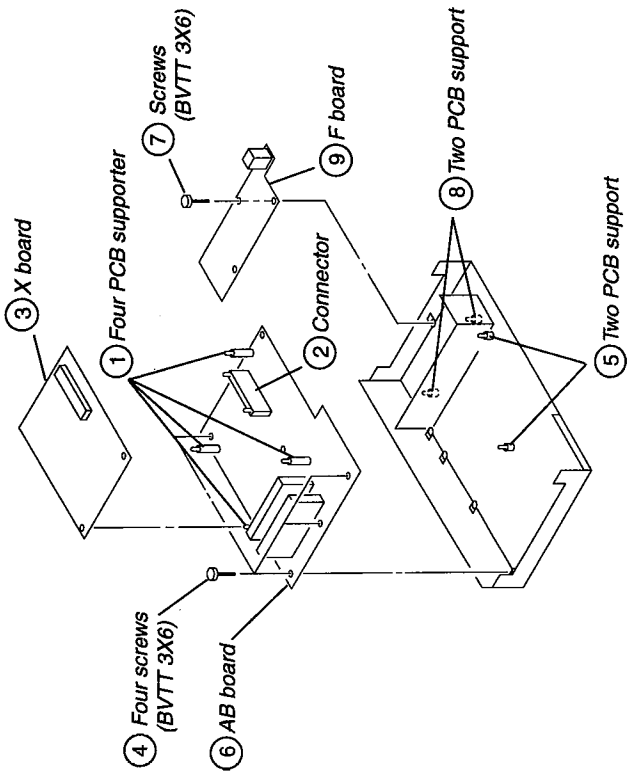

2-14. EXTENSION CABLE

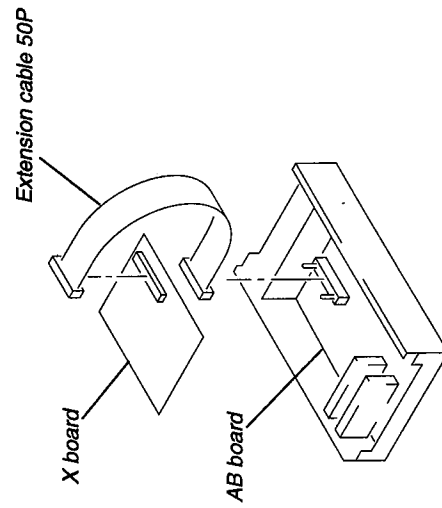


U AUDIO SW
CONTROLLER


V VELOCITY
MODULATION

D DYNAMIC CONVERGENCE,
QUADRA-POLE,
V-PIN


- U BOARD -

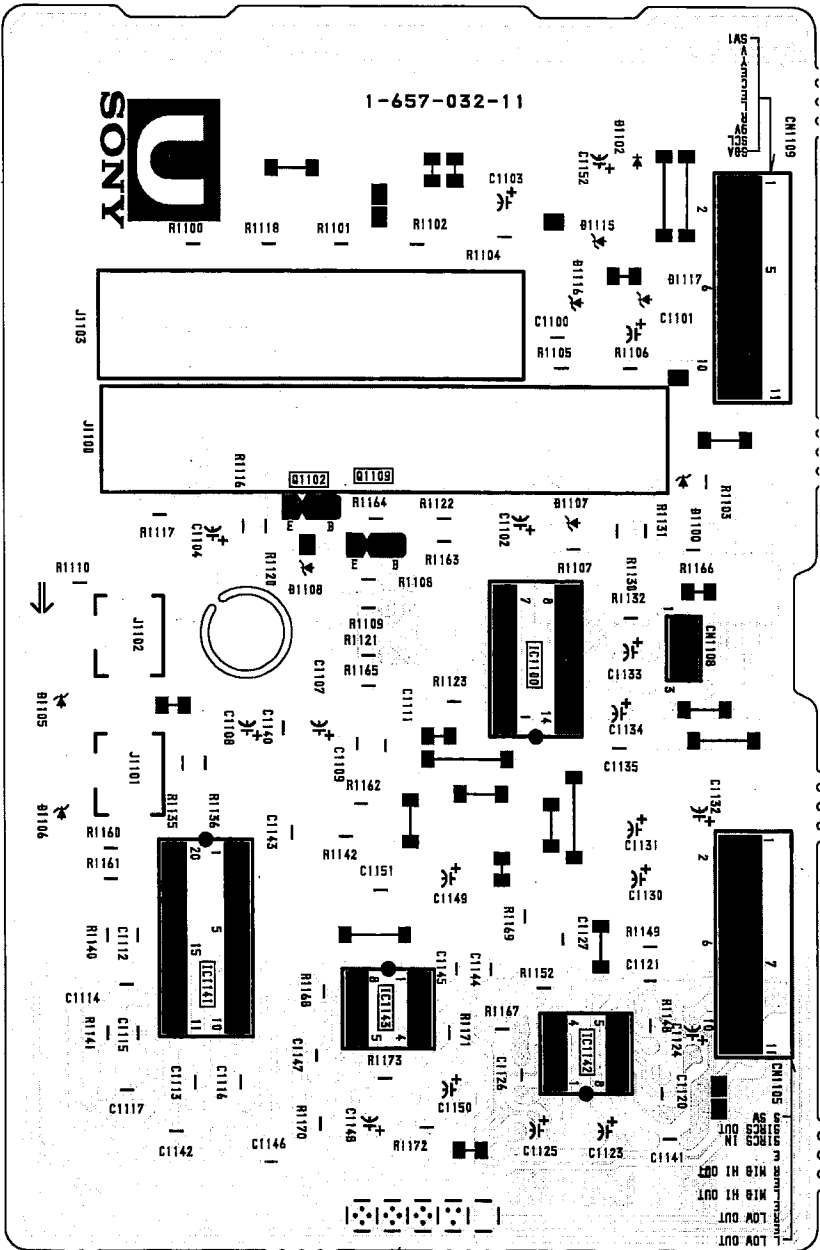

- D BOARD -

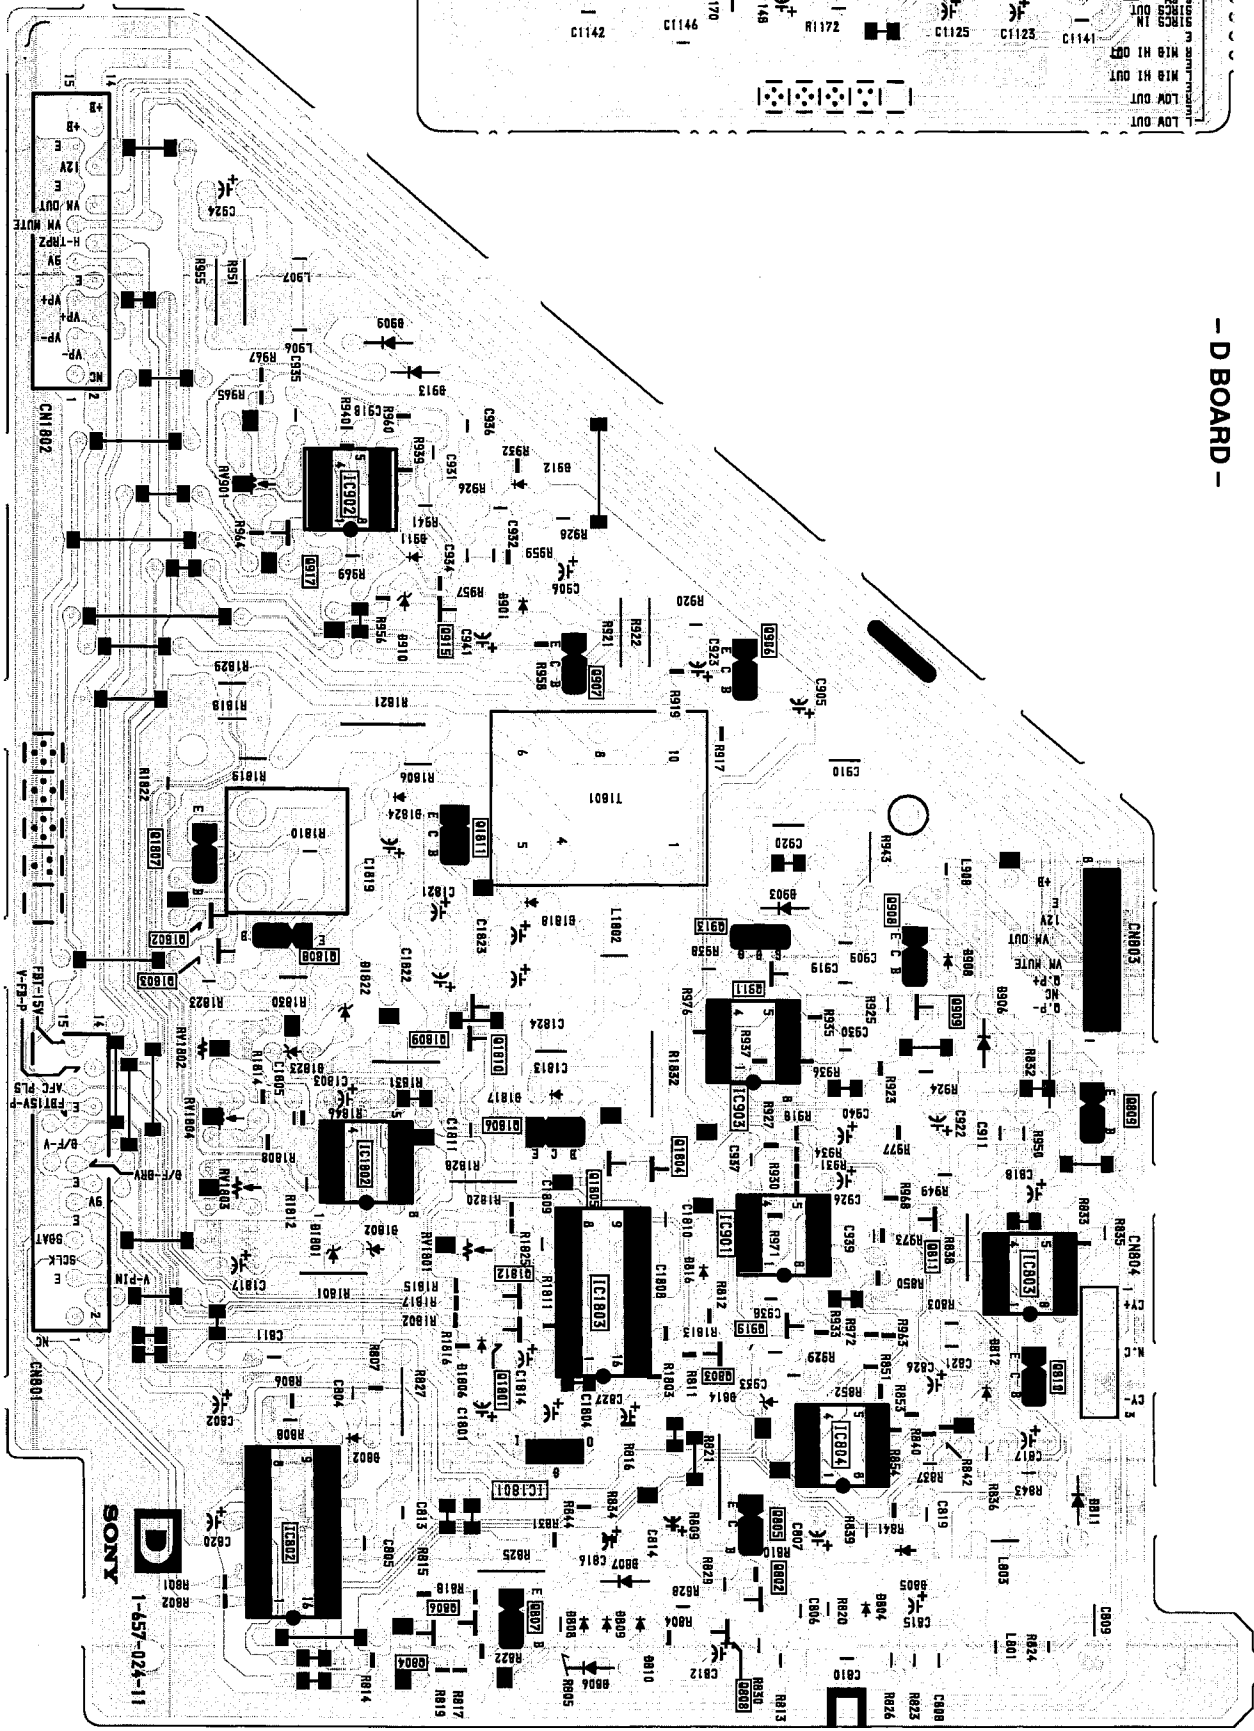

- V BOARD -

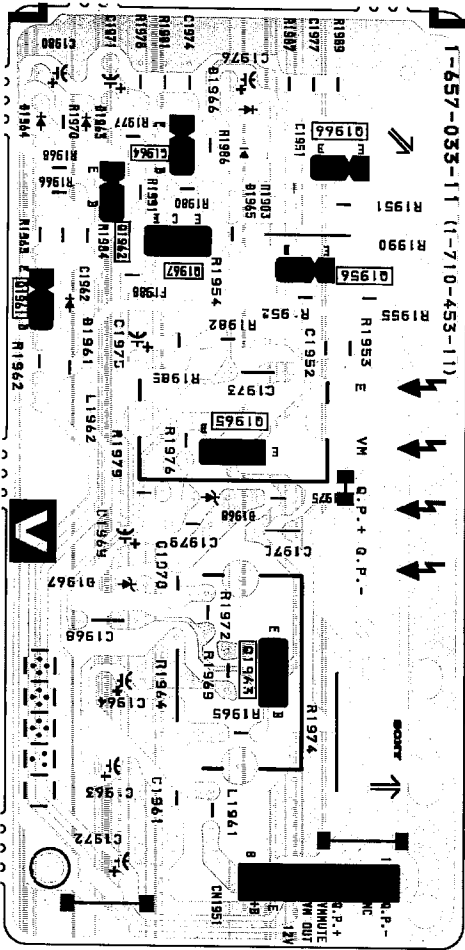


Schematic diagrams

HA ZA boards

ZB

22

22

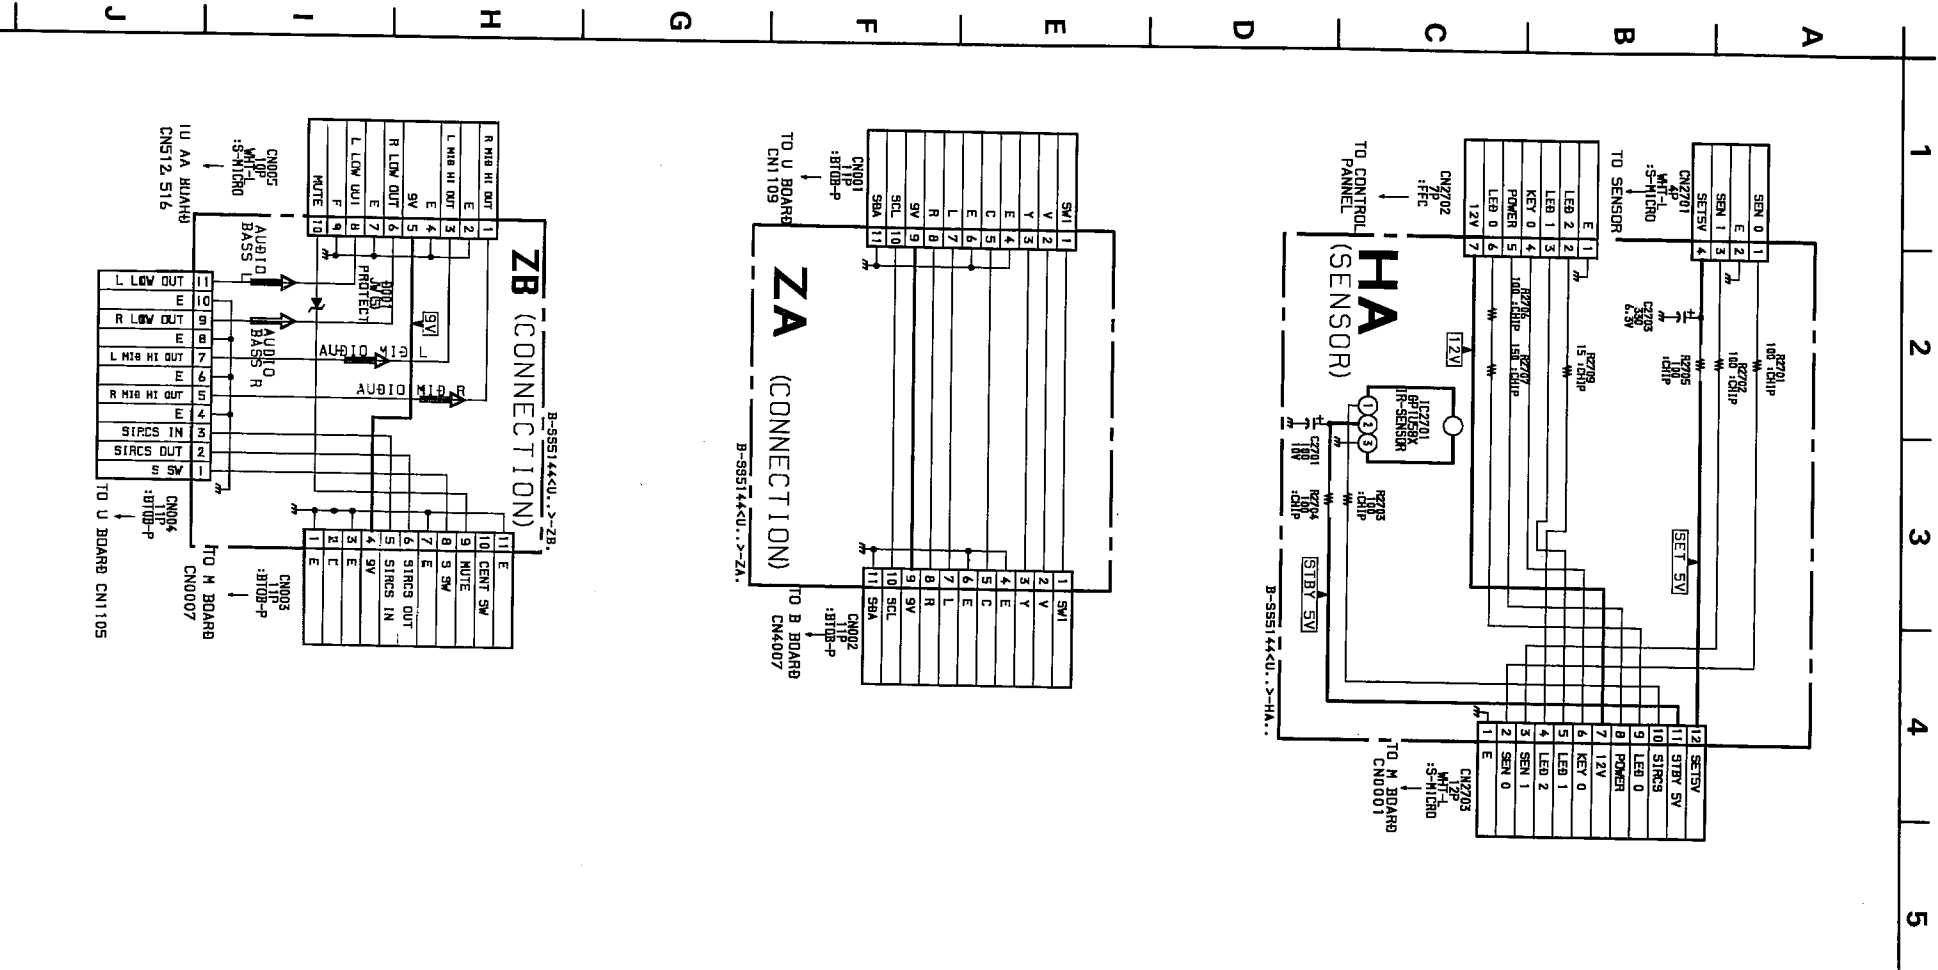

ZA

[CONNECTION]


ZB

[CONNECTION]


HA

[SENSOR]

- ZA BOARD -




- ZB BOARD -

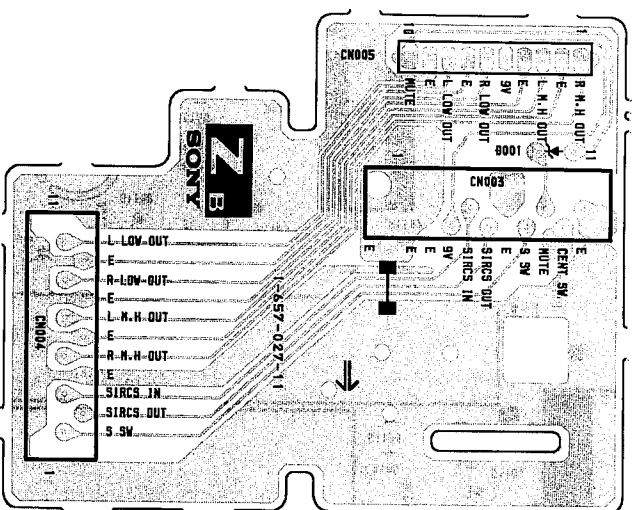


- HA BOARD -

⟨Component Side⟩

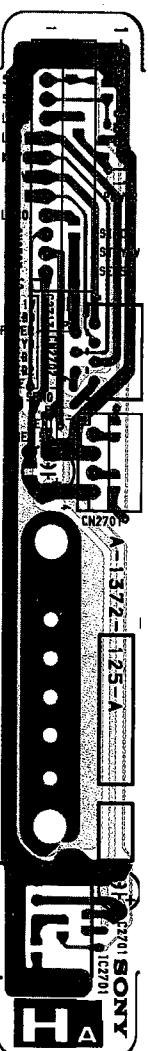

⟨Conductor Side⟩

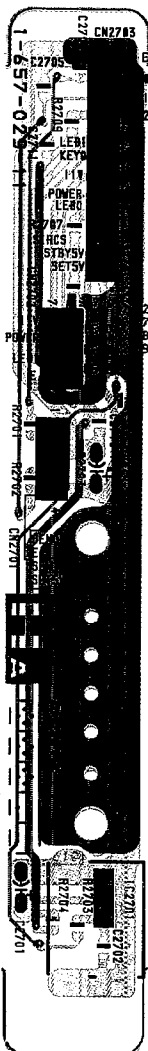


Note:

- : Pattern from the side which enables seeing.
- : Pattern of the rear side.


X MPX, PICTURE IN PICTURE,
XDS, OSD, MIXER

- X BOARD -
 (Component Side)

1 2 3 4 5 6 7 8 9

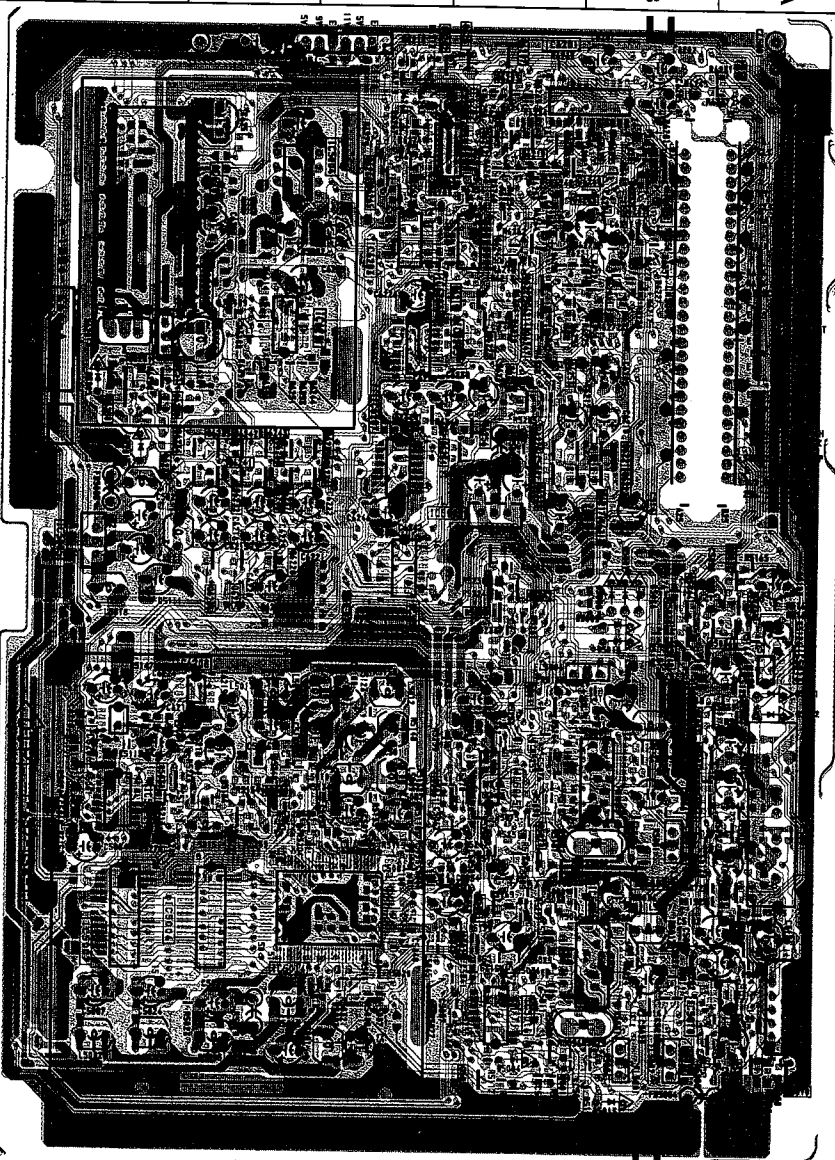

 (Conductor Side)

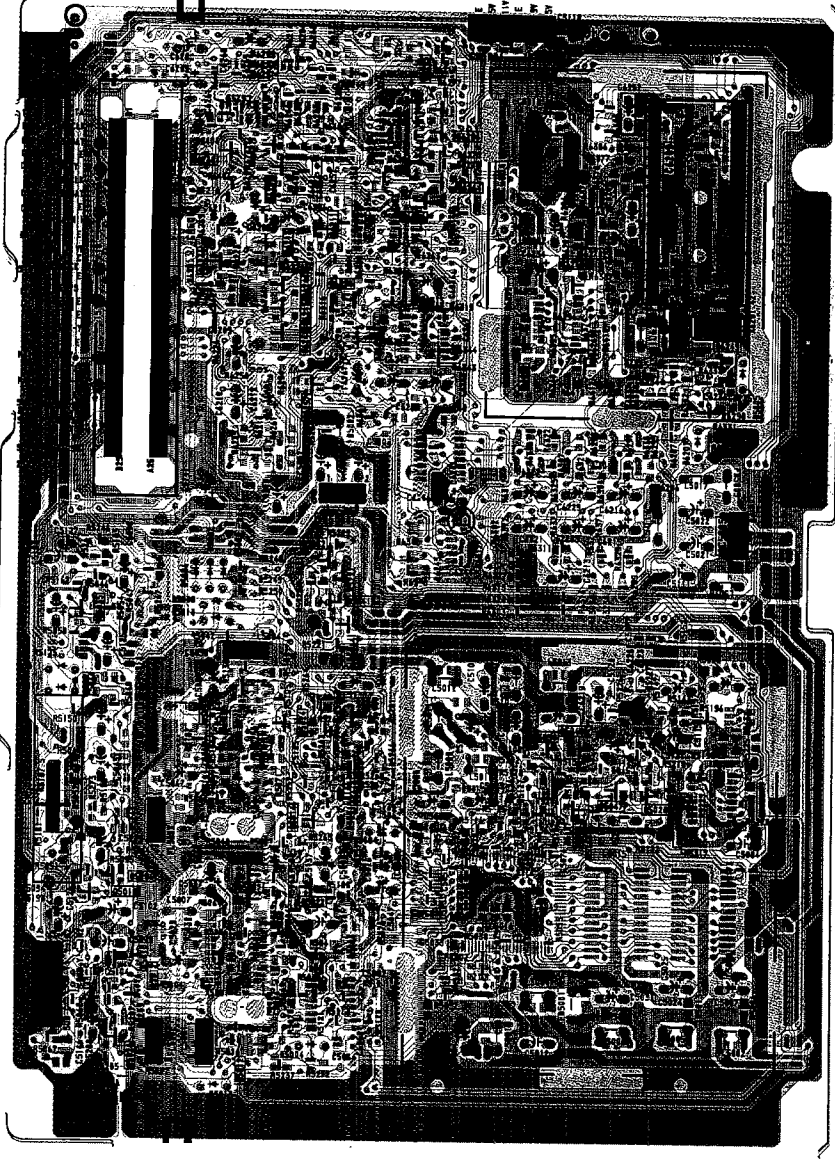

X BOARD									
IC		05060	E-6		06253	C-3			
IC5002	C-4				06254	C-4			
IC5006	E-7	06201	C-1		06255	D-4			
IC5007	F-7	06202	D-1		06256	C-4			
IC5008	B-6	06203	C-1		06257	K-3			
IC5010	A-8	06204	J-2		06258	I-2			
IC5011	D-5	06205	J-1		06259	J-3			
IC5012	F-6	06206	J-2		06260	C-2			
IC5014	D-7	06207	C-1		06261	L-2			
IC5015	C-6	06208	C-1		06262	L-2			
IC5016	C-8	06209	L-2		06263	C-2			
IC6201	C-1	06210	C-1		06264	J-2			
IC6202	D-1	05211	K-2		06265	D-2			
IC6203	D-2	06212	C-1		06266	D-2			
IC6204	C-2	06213	L-2		06267	B-2			
IC6205	D-3	06214	C-3		06268	I-3			
IC6206	F-6	06215	L-3		06269	I-3			
IC6207	D-4	06216	E-5		06270	I-2			
IC6208	E-6	06217	C-4		MODE				
IC6209	F-2	06218	C-4		DS001	D-2	J-2		
IC6210	F-3	06219	C-3		DS002	D-2	J-2		
IC6211	E-3	06220	E-5		DS004	C-8	K-8		
TRANSISTOR		06221	B-4		DS005	F-3	H-3		
Q5001	C-7	06222	B-4		DS009	B-5	L-5		
Q5002	A-6	06223	C-3		DS010	A-6	L-5		
Q5007	L-7	06224	K-3		DS011	A-6	M-6		
Q5008	L-7	06225	E-5		DS012	A-6	M-6		
Q5010	A-8	06226	L-3		DS013	B-9	L-9		
Q5011	C-8	06227	C-3						
Q5012	L-8	06228	C-4						
Q5013	C-8	06229	C-4						
Q5014	K-7	06230	F-3						
Q5016	A-7	06231	F-3						
Q5018	K-6	06232	E-4						
Q5020	C-7	06233	E-4						
Q5021	C-7	06235	E-4						
Q5022	K-7	06236	E-4						
Q5025	C-7	06237	E-4						
Q5028	I-6	06238	E-4						
Q5029	L-6	06239	E-4						
Q5030	F-6	06240	E-4						
Q5031	C-6	06241	E-4						
Q5032	K-5	06242	E-4						
Q5033	C-5	06243	E-4						
Q5034	K-5	06244	L-3						
Q5036	A-5	06245	C-2						
Q5038	B-5	06246	L-3						
Q5039	C-5	06247	C-3						
Q5040	I-6	06248	L-3						
Q5041	K-5	06249	H-3						
Q5042	C-5	06250	F-3						
Q5051	I-6	06251	F-3						
Q5053	I-7	06252	C-3						



Note :

- : Pattern from the side which enables seeing.
- : Pattern of the rear side.

AA

H, V, DEFLECTION,
DYNAMIC FOCUS,
AUDIO OUT

- AA BOARD -

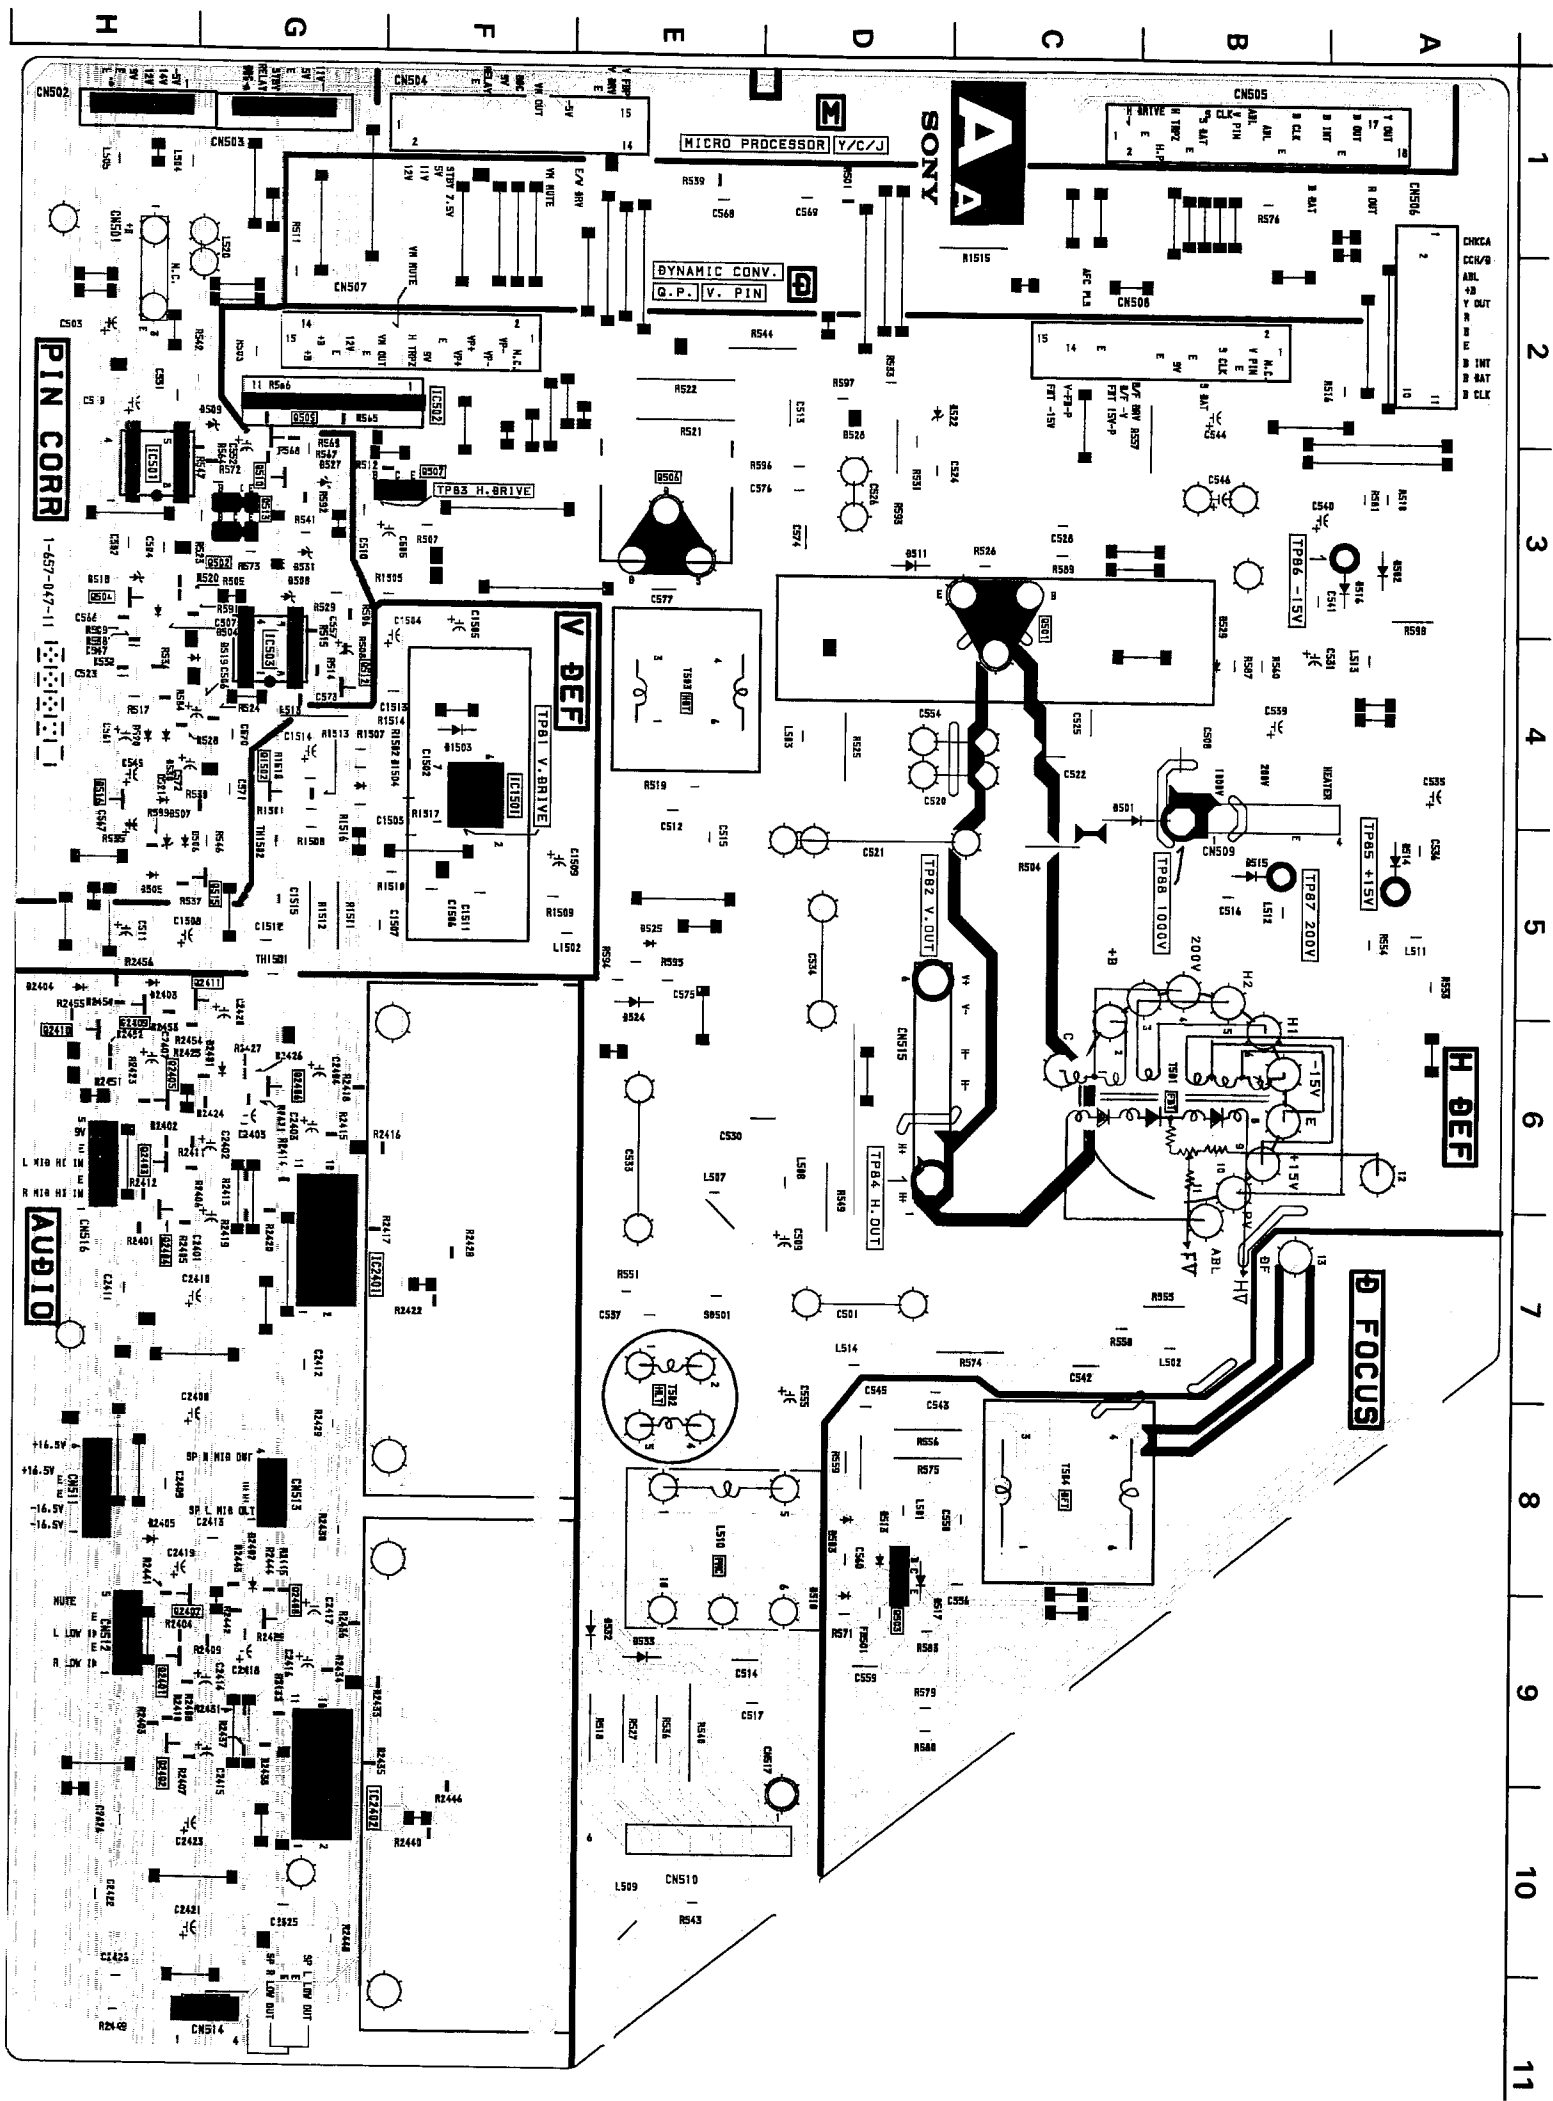


NOTE:

The circuit indicated as left contains high voltage of over 600 Vp-p. Care must be paid to prevent an electric shock in inspection or repairing.


AA BOARD	
IC	
IC501	H-3
IC502	G-2
IC503	G-4
IC1501	F-4
IC2401	G-7
IC2402	G-9
TRANSISTOR	
Q501	C-3
Q502	G-3
Q503	D-8
Q504	H-3
Q506	E-3
Q507	F-3
Q510	G-3
Q512	G-4
Q513	G-3
Q515	G-5
Q516	H-4
Q1502	G-4
Q2401	H-9
Q2402	H-9
Q2403	H-6
Q2404	H-7
Q2405	H-6
Q2406	G-6
Q2407	G-9
Q2408	G-9
Q2409	H-6
Q2410	H-6
Q2411	G-5
DIODE	
D501	C-4
D502	A-3
D503	D-8
D504	H-3
D505	H-5
D506	H-5
D507	H-5
D508	G-3
D509	G-2
D513	D-8
D514	A-5
D515	B-5
D516	A-3
D517	D-8
D518	H-3
D520	H-4
D521	H-4
D522	D-2
D524	E-5
D527	G-3
D529	B-4
D530	H-4
D532	E-9
D533	E-9
D1503	F-4
D2401	G-6
D2402	G-9
D2404	H-5

- Q BOARD -

〈Component Side〉

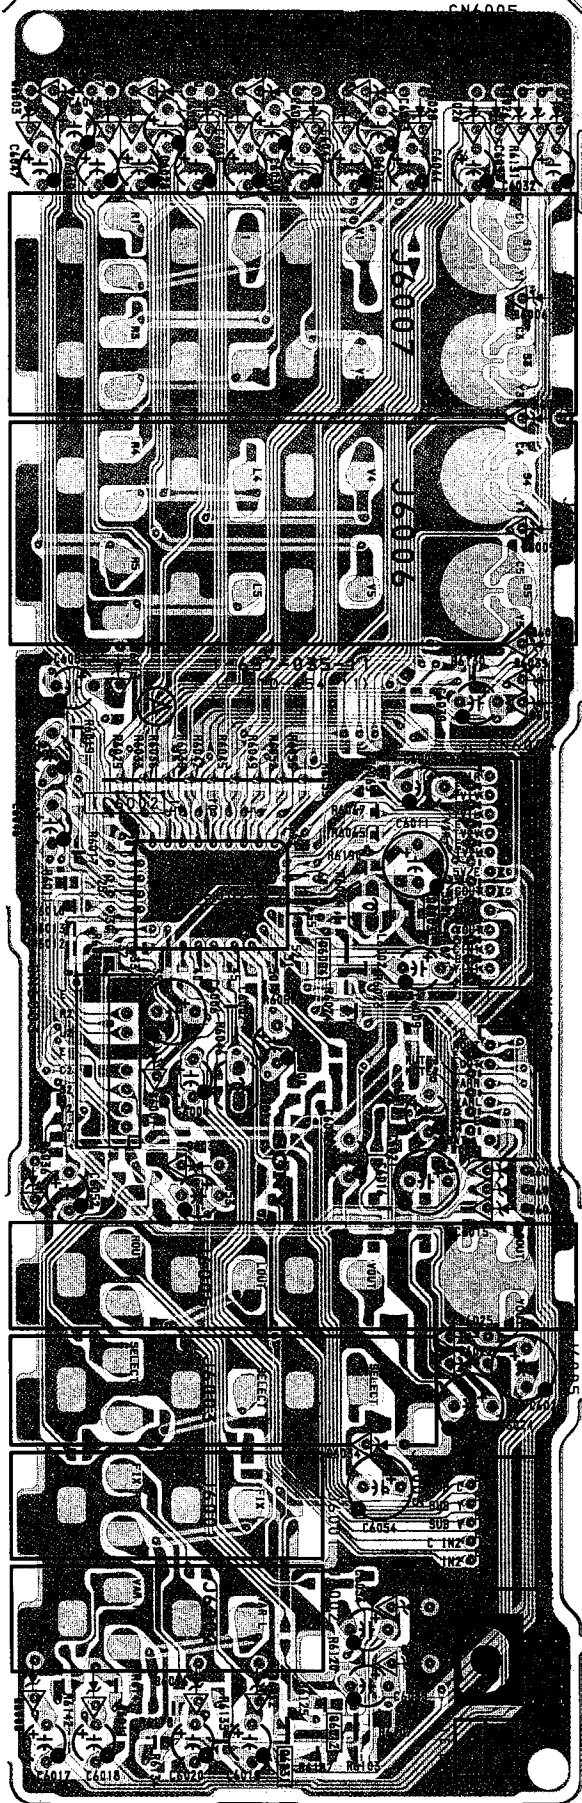

〈Conductor Side〉

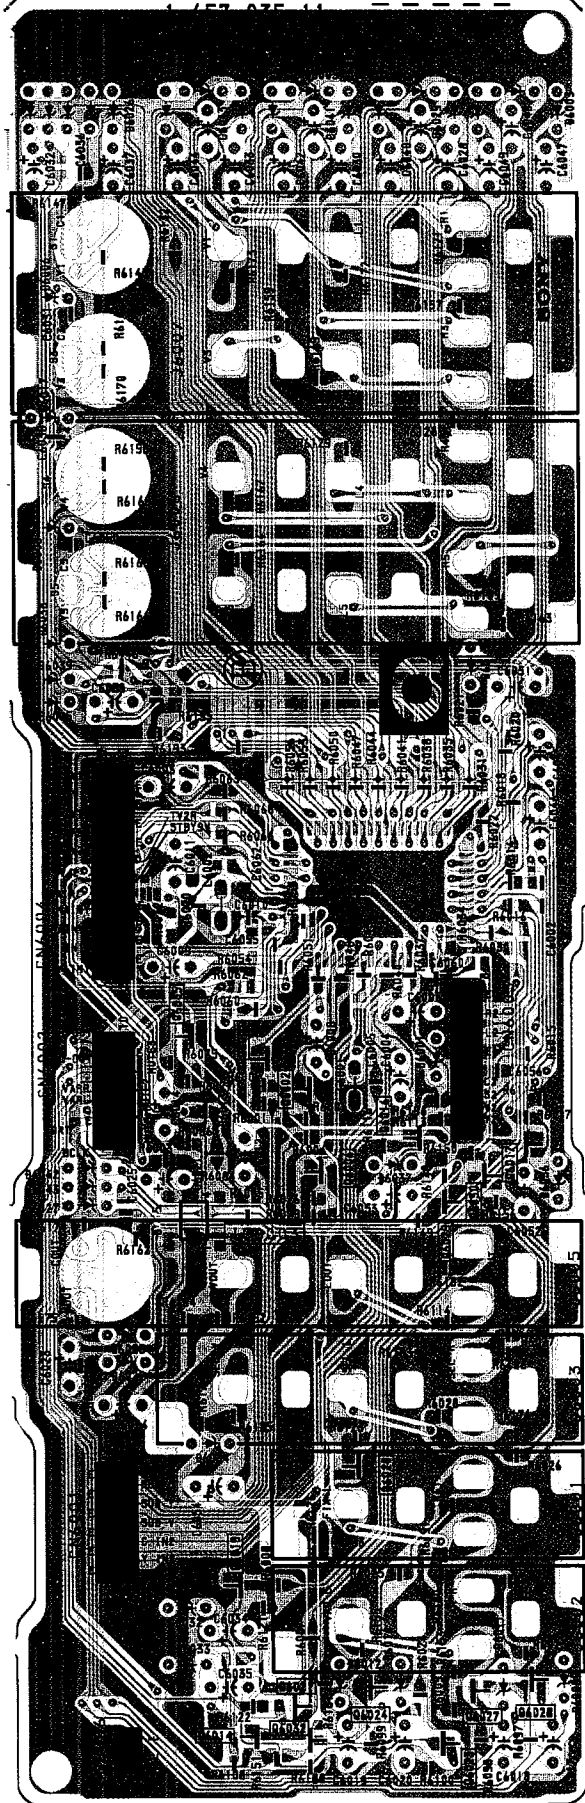


Note :


-  : Pattern from the side which enables seeing.
-  : Pattern of the rear side.

B [3 DIMENTION DIGITAL COMB FILTER,
MULTI CABLE INTERFACE]

- B BOARD -
(Component Side)

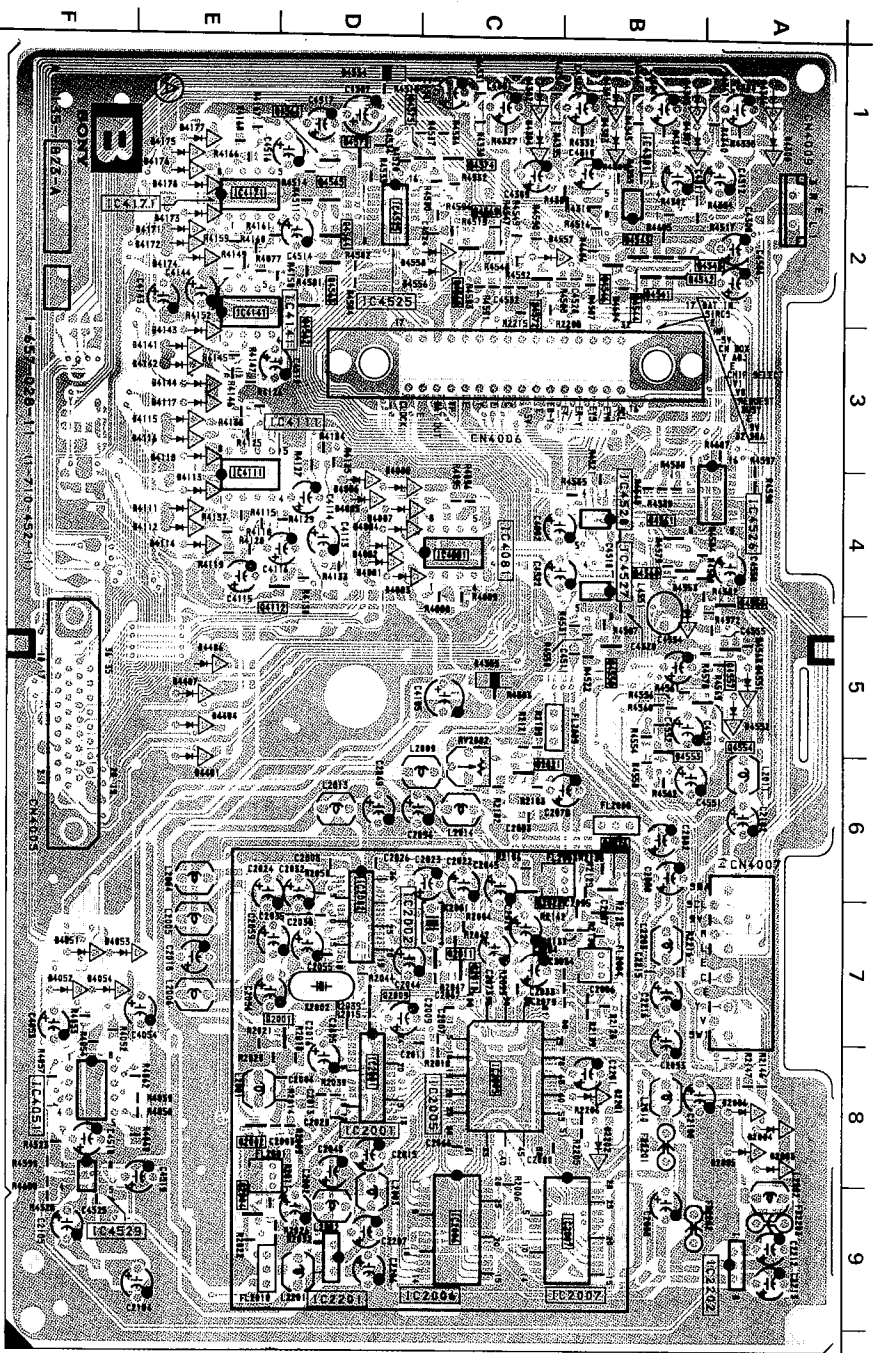


(Conductor Side)

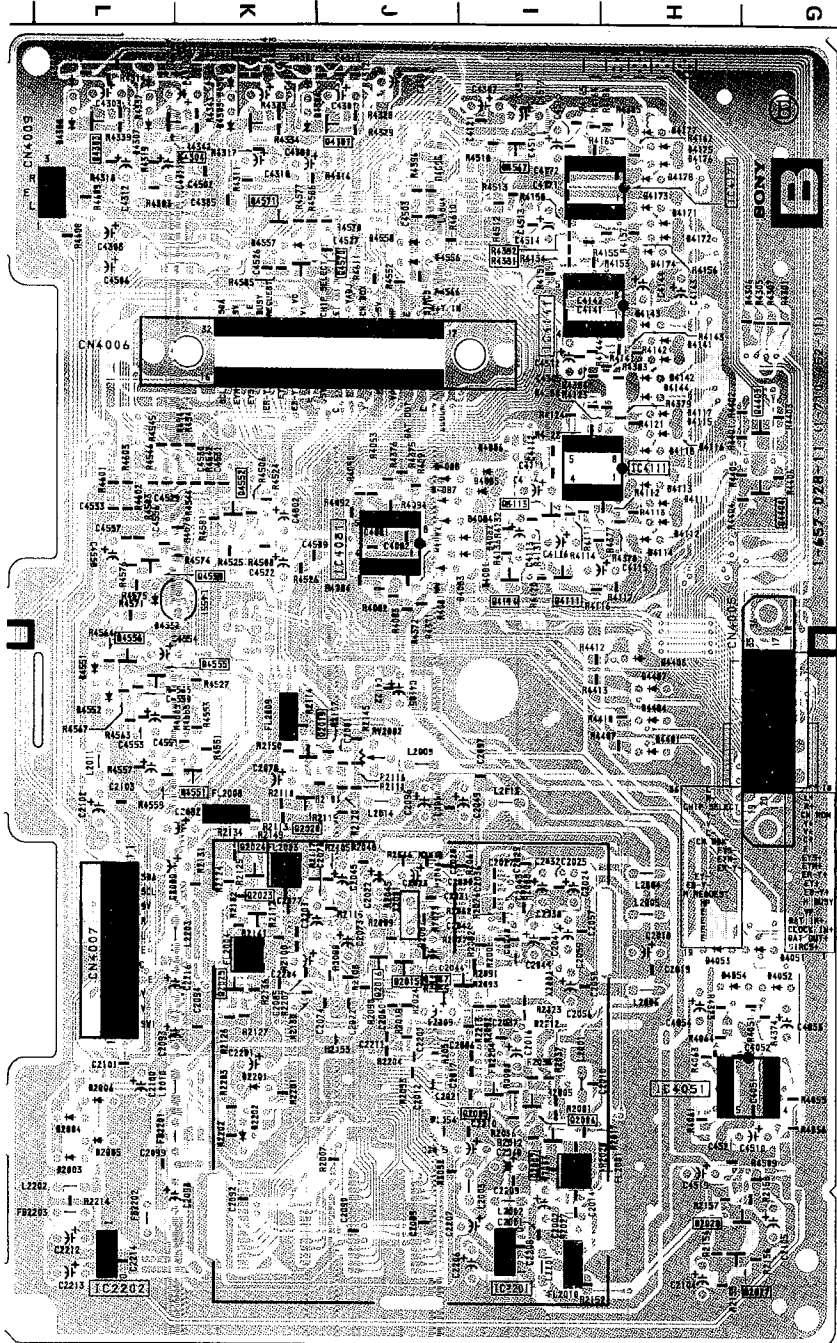


B BOARD			
IC		Q4112	E-4
IC2001	D-8	Q4113	I-4
IC2002	D-7	Q4114	I-4
IC2003	C-8	Q4403	G-3
IC2006	C-9	Q4404	G-4
IC2007	B-9	Q4541	B-2
IC2201	D-9	Q4542	B-2
IC4051	F-8	Q4543	B-2
IC4081	C-4	Q4544	B-2
IC4111	E-3	Q4545	B-2
IC4141	E-2	Q4546	B-2
IC4301	B-2	Q4551	K-6
IC4525	D-2	Q4552	K-4
IC4526	A-4	Q4553	B-5
IC4527	B-4	Q4554	L-5
IC4528	B-4	Q4557	A-5
IC4529	F-8	Q4558	A-4
TRANSISTOR			
Q2001	D-7	Q4561	B-4
Q2004	E-9	Q4562	D-2
Q2005	F-8	Q4563	D-2
Q2006	I-8	Q4564	D-2
Q2007	I-8	Q4566	D-1
Q2009	D-7	Q4567	L-1
Q2010	C-7	Q4568	C-2
Q2011	C-7	Q4570	K-2
Q2016	J-7	Q4571	K-2
Q2017	I-7	Q4572	C-2
Q2019	K-6	Q4573	D-1
Q2020	K-6	Q4574	C-1
Q2021	C-6	Q4575	D-1
Q2022	C-6	DIODE	
Q2023	K-7	D2202	B-8
Q2024	K-6	D4551	A-5
Q2025	K-7	D4552	A-5
Q2026	B-6	D4553	A-4
Q2027	G-9	D4557	C-2
Q2028	G-9	D4558	C-2
Q4111	I-4		

B BOARD IC2002 uPC1862GS-E2

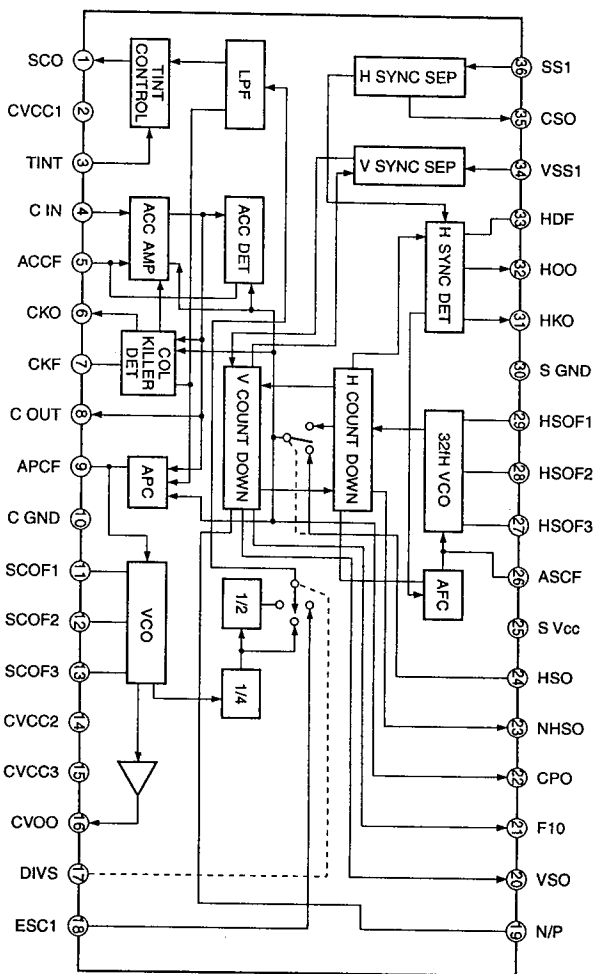


B BOARD IC4526 CXA1315M-14

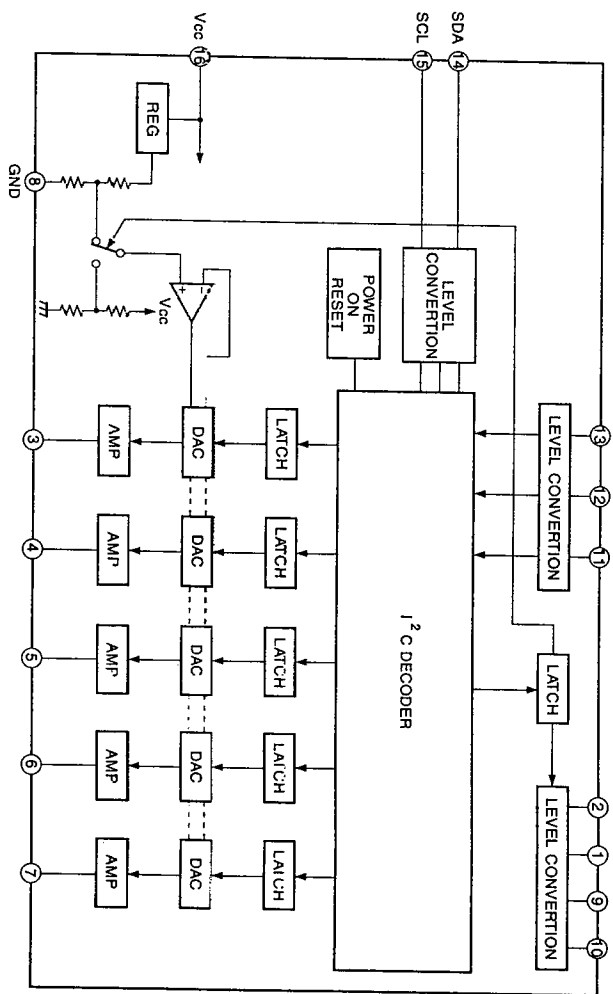

Note :

- Pattern from the side which enables seeing.
- Pattern of the rear side.

- M BOARD - <Component Side>

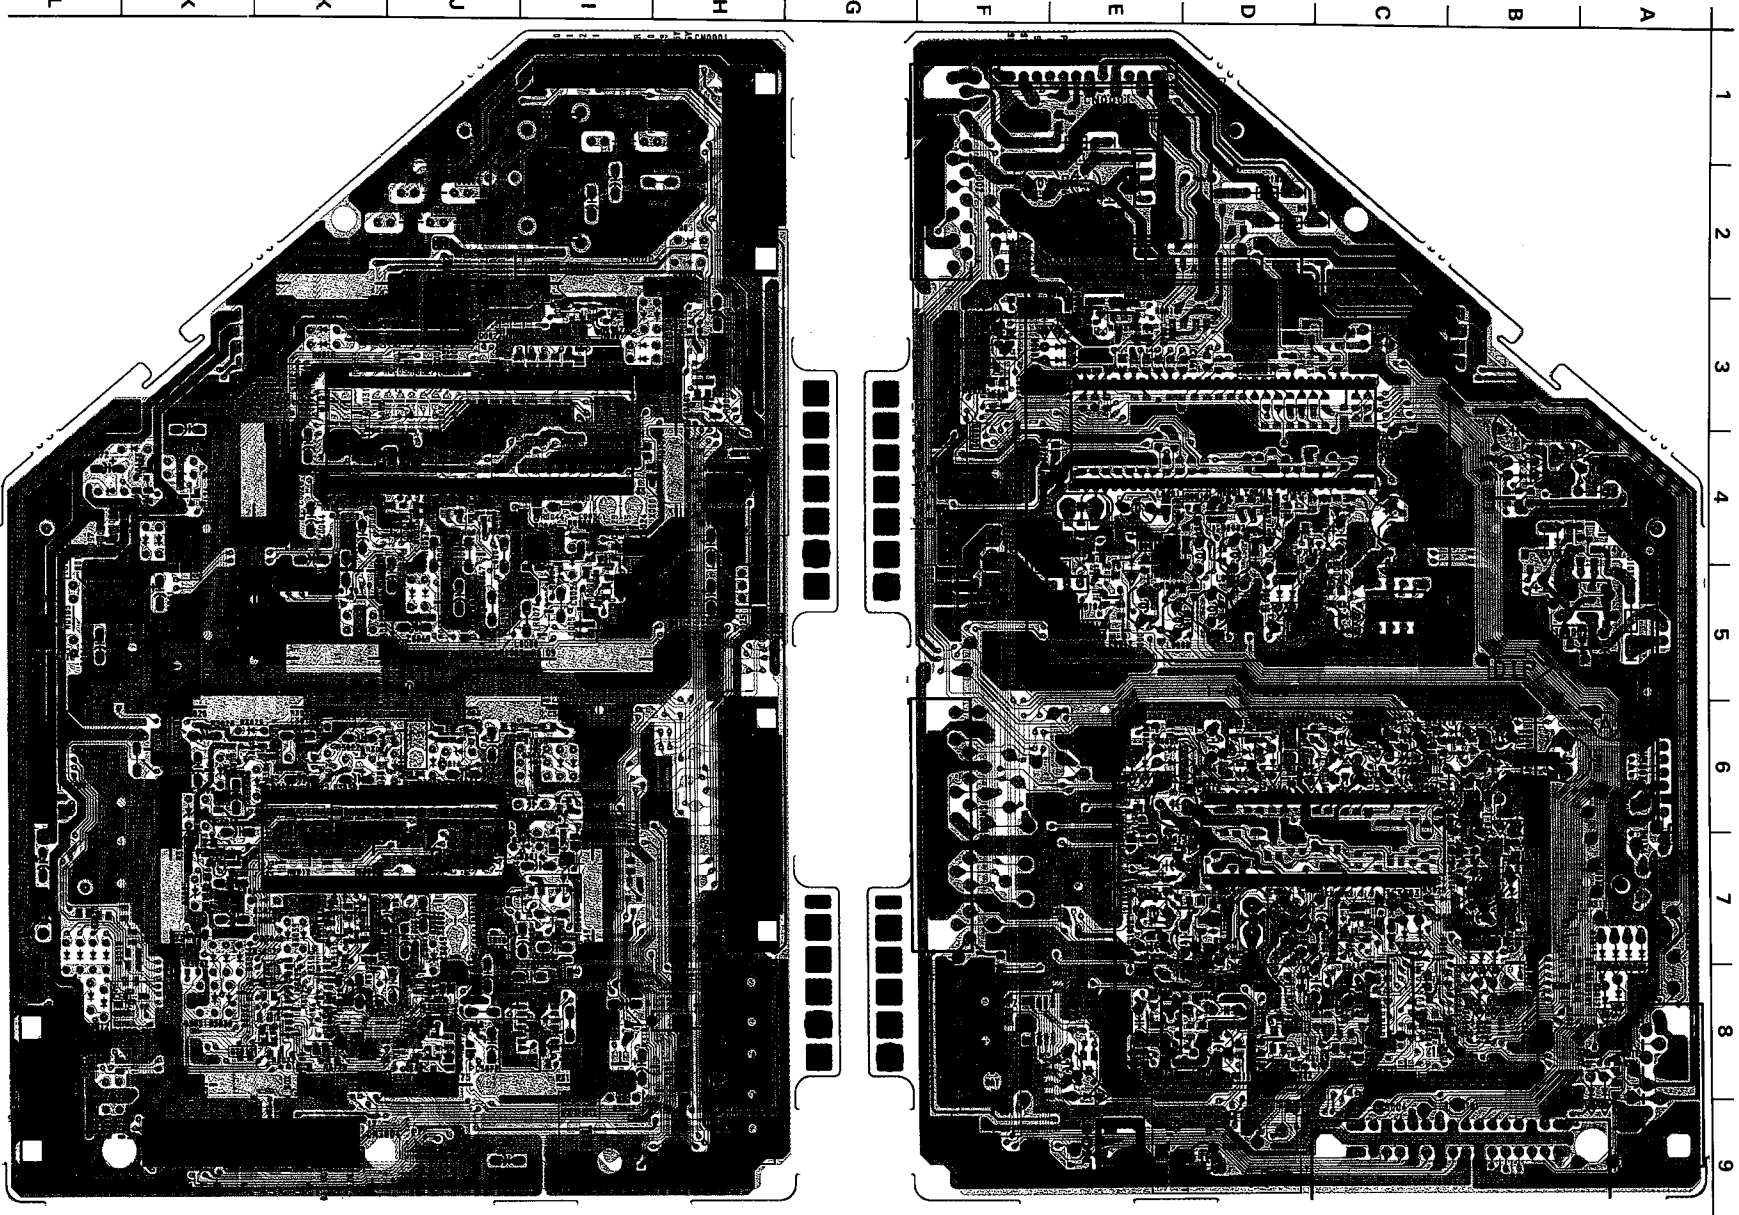


M BOARD				
IC			DIODE	
IC0001	D-3	J-3	D0001	C-3 K-3
IC0002	A-5	M-5	D0002	E-3 H-3
IC0004	F-5	H-5	D0004	E-3 H-3
IC0005	F-5	H-5	D0005	F-2 H-2
IC0006	E-5	I-5	D0006	E-3 H-3
IC3003	C-7	J-6	D0007	F-2 H-2
IC3005	E-2	I-2	D0009	B-4 L-4
IC3006	E-8		D0010	B-4 L-4
IC3007	H-8		D0013	D-5 J-5
TRANSISTOR				
Q0001	J-3		D0014	D-5 J-5
Q0002	F-3		D0015	C-3 K-3
Q0003	I-3		D0016	B-4 L-4
Q0004	E-3		D0018	B-4 L-4
Q0005	E-3		D0019	A-4 M-4
Q0006	F-3		D3005	B-6 L-6
Q0007	H-3		D3006	C-6 K-6
Q0008	F-3		D3008	E-6 I-6
Q0009	L-5		D3009	B-6 L-6
Q0010	D-4		D3010	D-6 J-6
Q0011	L-5		D3012	A-8 M-8
Q0012	I-4		D3014	D-7 I-7
Q0013	I-5		D3015	D-7 I-7
Q0014	I-5		D3016	D-6 J-6
Q0015	E-4		D3017	D-7 J-7
Q0016	E-5		D3019	A-7 M-7
Q0017	J-4		D3020	A-7 M-7
Q0018	B-4		D3021	A-8 M-8
Q0022	J-2		D3022	A-9 M-8
Q0023	J-2		D3023	A-9 M-8
Q0024	J-2		D3024	C-6 K-6
Q0025	I-2		D3025	B-7 L-7
Q0026	I-3		D3027	B-6 L-6
Q0027	J-3		D3028	B-6 L-6
Q3001	K-7		D3029	B-7 K-7
Q3002	K-7		D3029	B-7 K-7
Q3003	J-7		D3030	B-8 L-8
Q3004	D-6		D3031	B-8 L-8
Q3005	B-6		D3032	B-7 L-7
Q3006	C-6		D3033	B-7 L-7
Q3007	E-6		D3034	B-7 L-7
Q3008	E-6		D3035	E-6 I-6
Q3009	J-7		D3036	E-6 I-6
Q3010	J-7		D3037	E-6 I-6
Q3011	D-7		D3038	E-6 I-6
Q3012	D-6		D3042	E-9 I-9
Q3014	E-7			
Q3025	L-7			
Q3028	J-8			
Q3029	E-7			
Q3030	J-8			
Q3031	D-8			
Q3032	K-8			
Q3033	K-8			
Q3034	D-8			
Q3035	J-8			
Q3036	I-8			


Note :

-  : Pattern from the side which enables seeing.
-  : Pattern of the rear side.



SECTION 4
DIAGRAMS

4-1. BLOCK DIAGRAMS (1)

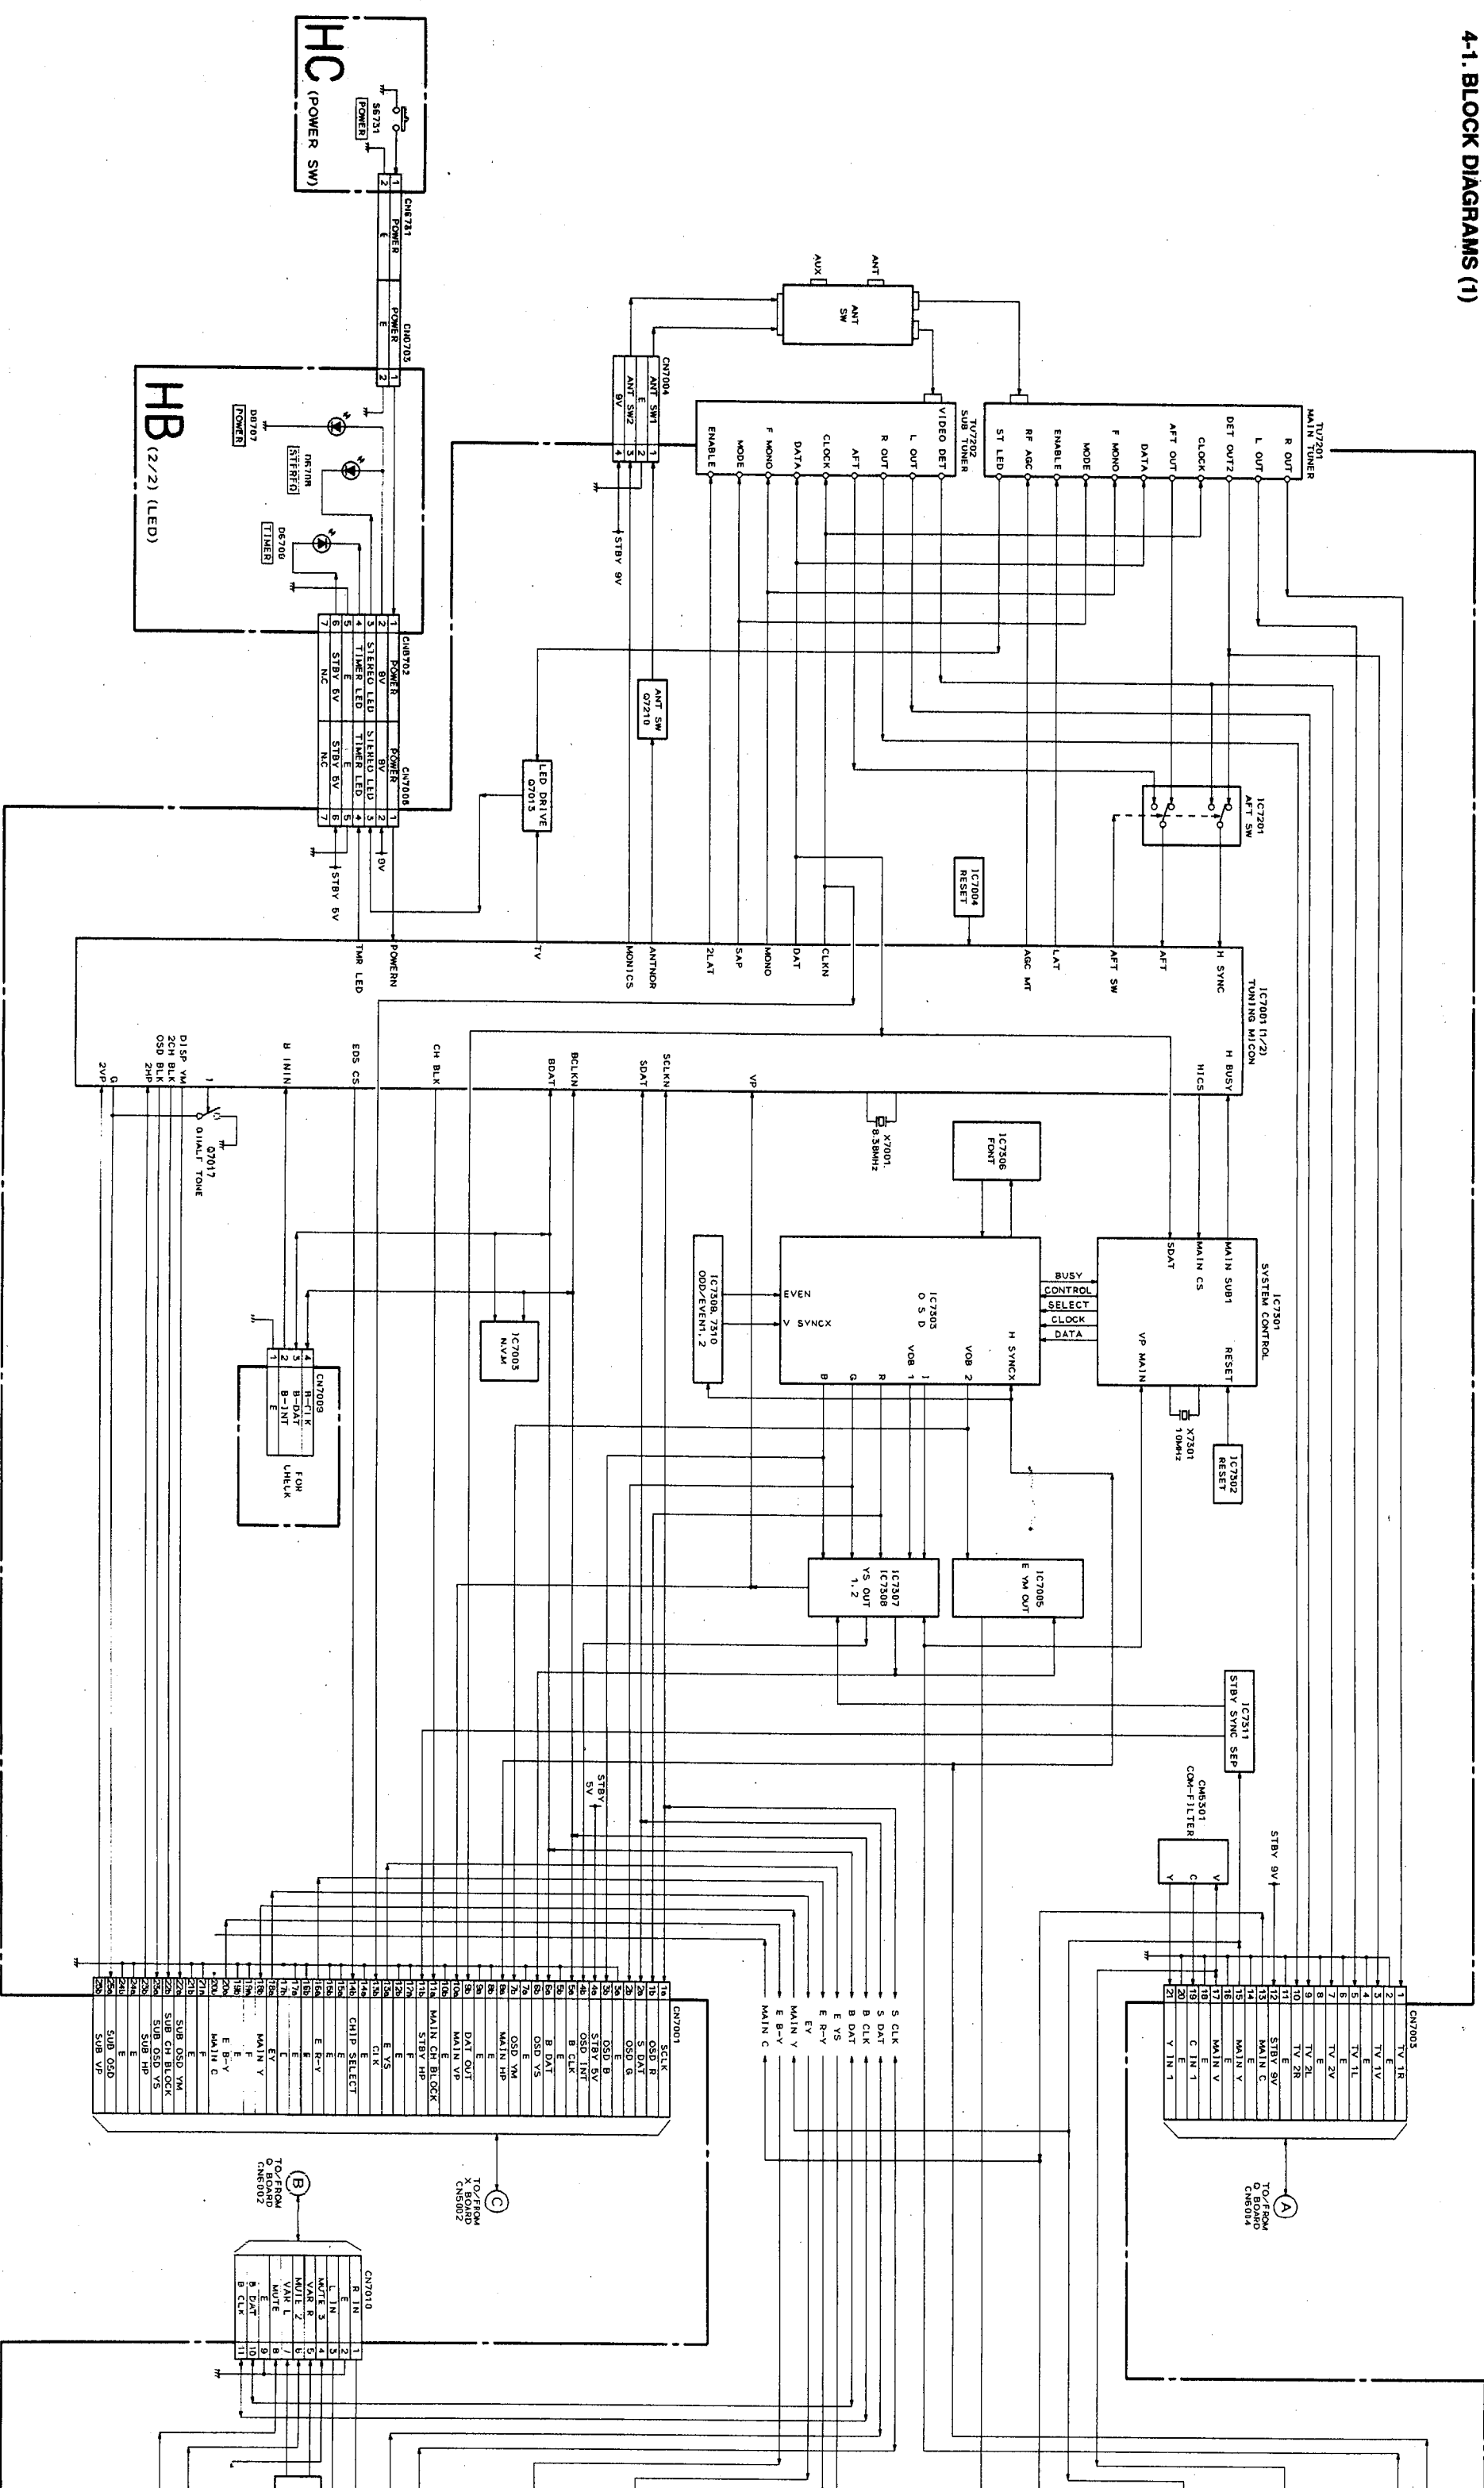

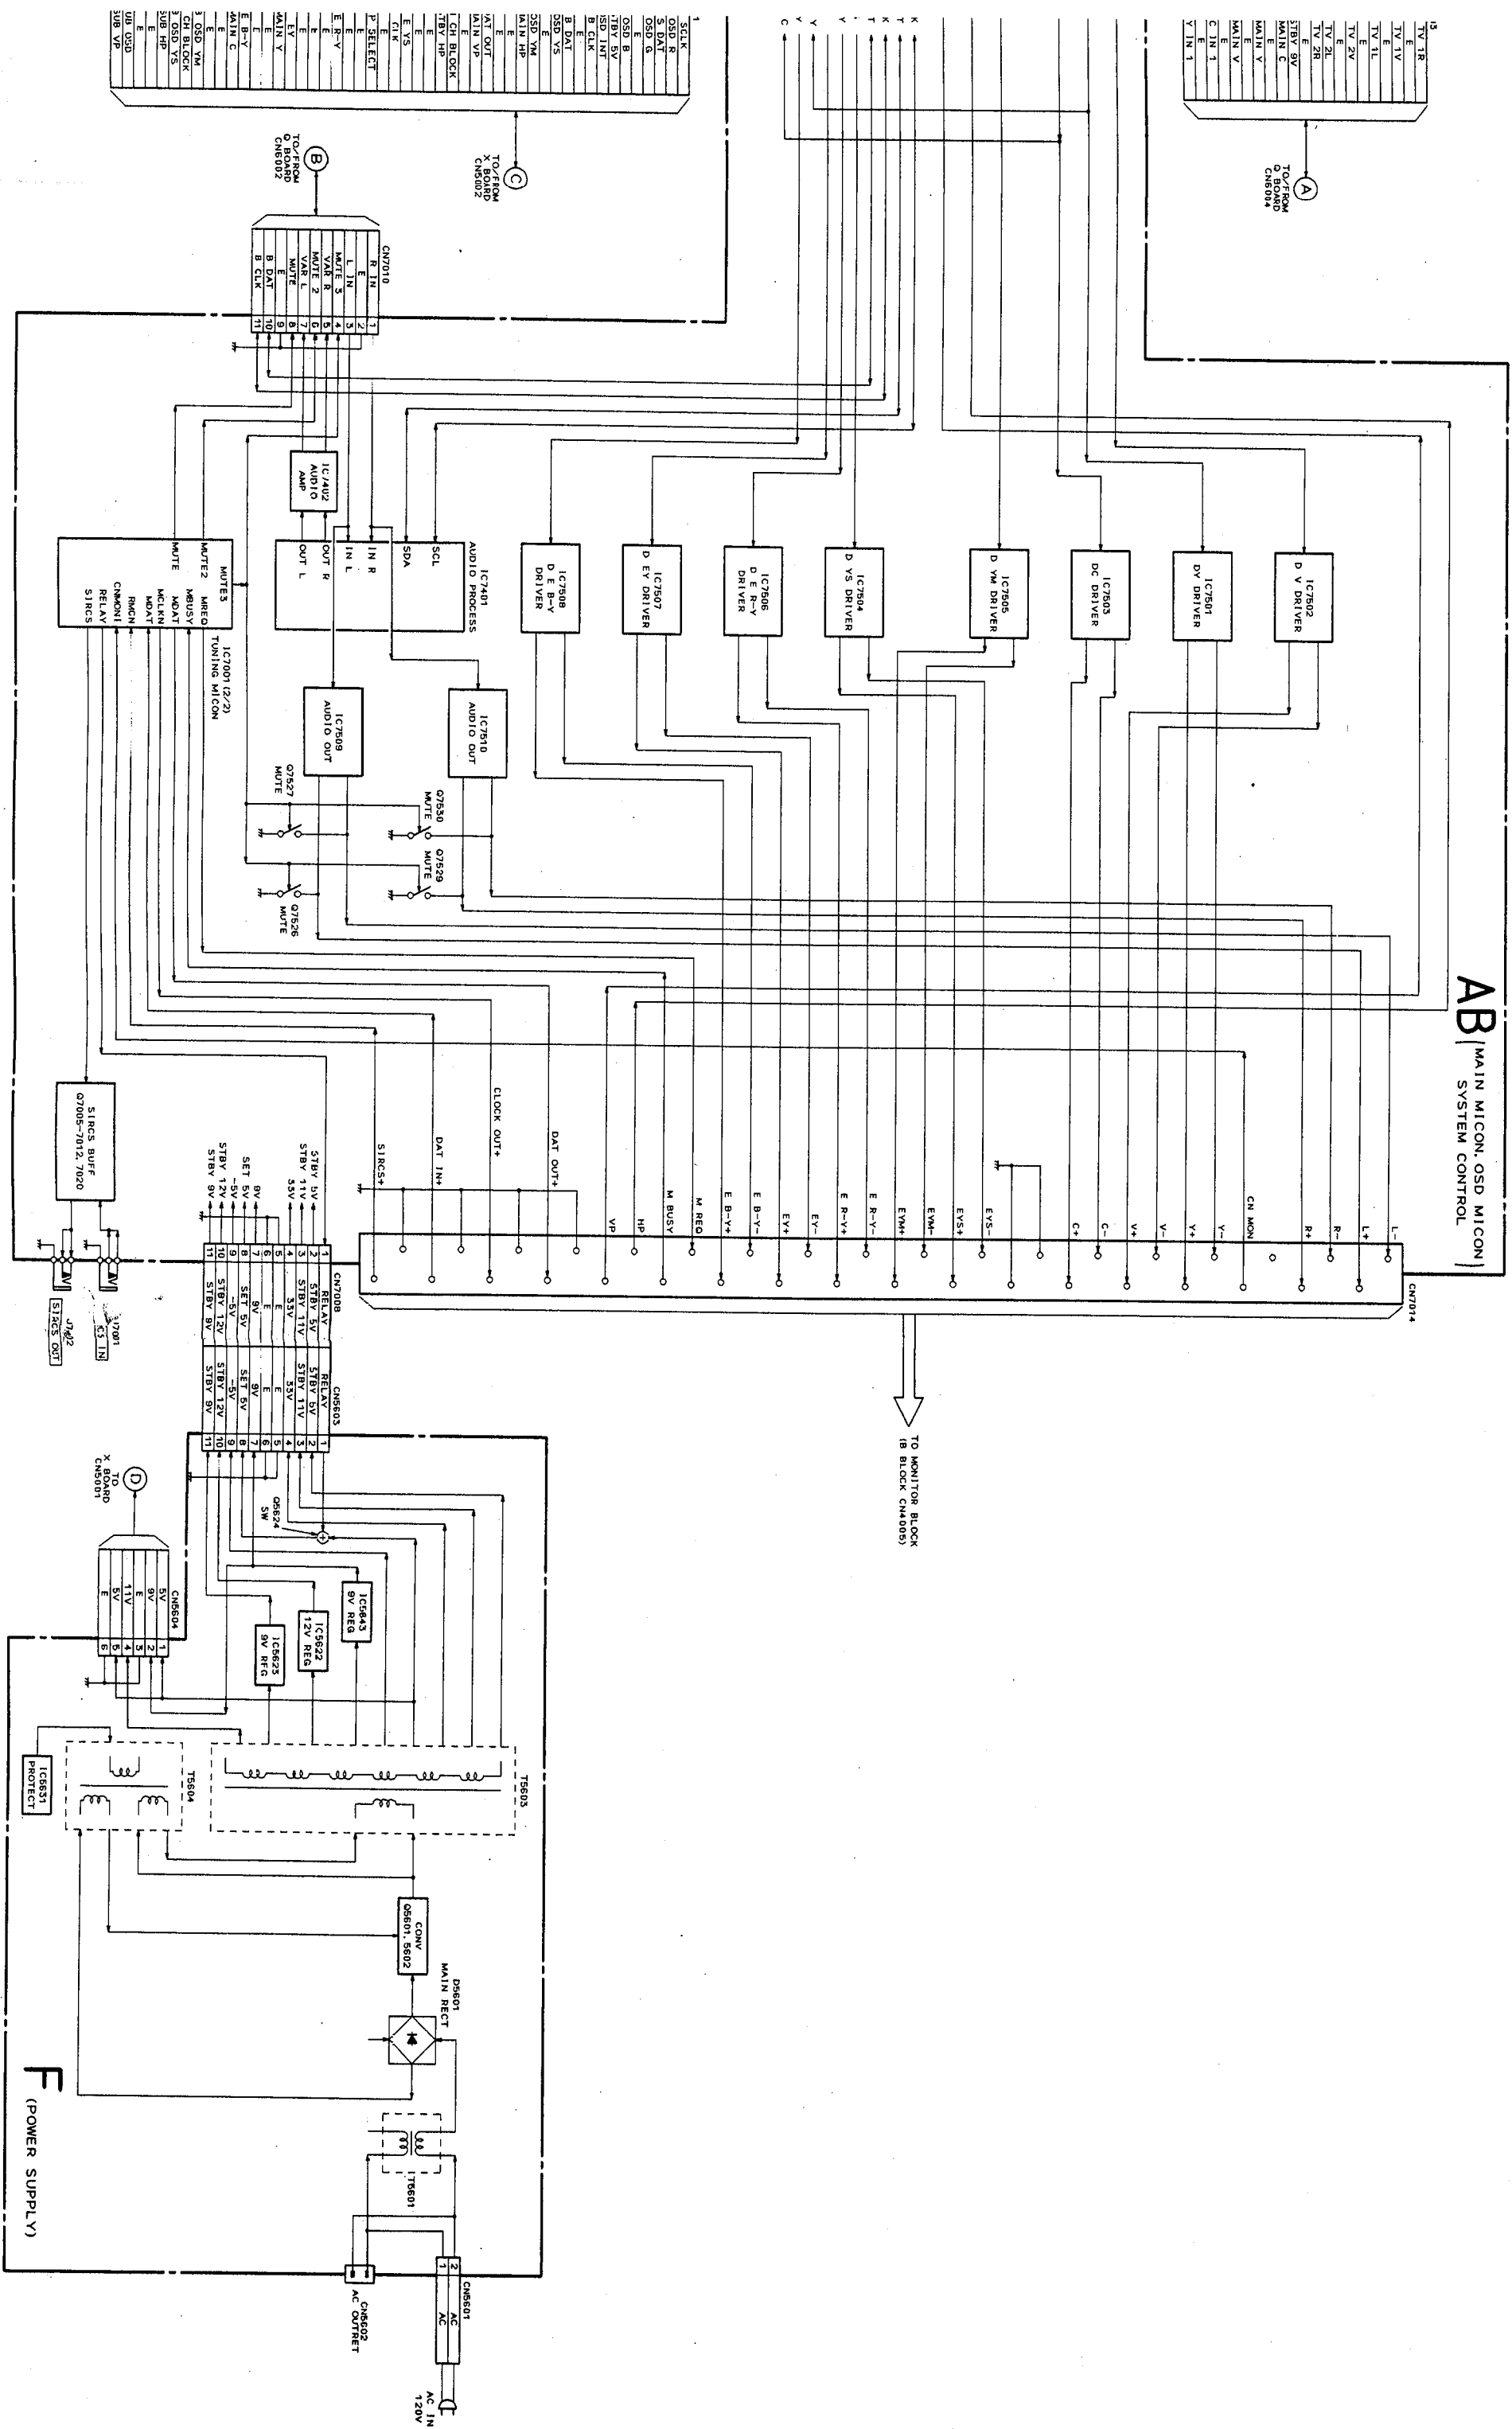

SECTION 3
SAFETY RELATED ADJUSTMENTS

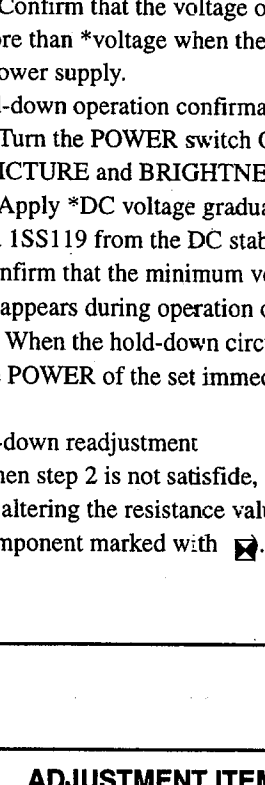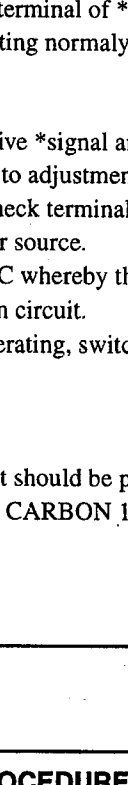ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
AA BOARD *RESISTOR CONFIRMATION METHOD (HV HOLD-DOWN CONFIRMATION) AND READJUSTMENTS The following adjustments should always be performed when replacing the following components (*marked with  on the schematic diagram). 1. Preparaton before confirmation. 1) Remove a*resistor on the G board and connect a*variable resistor between *pin of IC and B+ line. 2)Supply *AC with variable autotransfomer. 2. Hold-down operation confirmation. 1) Turn the POWER switch ON, and input an *signals and adjust ABL *current with *PICTURE and BRIGHT etc cotrols. 2) Incrase B+ line *voltage gradually by adjusting the *variable resistor. Confirm that the minimum voltage is *DC whereby the raster disappears during operation of hold-down circuit. NOTE: When the hold-down circuit starts operating, switch OFF the POWER of the set immediately. 3) Turn the POWER switch ON, and input a dot signals and adjust ABL *current with *PICTURE and BRIGHT etc cotrols. 4) Increase B+ line *voltage gradually by adjusting the *variable resistor Confirm that the minimum voltage is *DC whereby the raster disappears during operation of hold-down circuit. NOTE: When the Hold-down circuit starts operating, switch OFF the POWER of the set immediately.	*Entirely white *Ammeter *DC power supply *Digital multimeter *Ammeter *Digital multimeter	* marked parts IC502, Q509, Q510, R565, R567, R568, R569..(AA board) *IC620 pin ① (G board) *T501 pin ① (AA board) *IC620 pin ① (G board) *T501 pin ① (AA board) *IC620 pin ① (G board)	* R565 (AA board) *R651 *RV1:10KΩ (G board) *PICTURE BRIGHT	 AA BOARD - component side - G BOARD - component side - DC power supply digitalmultimete Am meter 3m A DC range *120±2.0V AC (Power supply) *1860±50μA *Less than 147.0V DC  T501 FBT ammeter 3.0 mA dc range *110±30μA *Less than 148.5V

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
3. Hold-down readjustment When step 2 is not satisfied, readjustment should be performed by altering the resistance value of *R565 (a component marked with ). 4. Restore R651 *RESISTOR CONFIRMATION METHOD (HOLD-DOWN CONFIRMATION)AND READJUSTMENTS The following adjustments should always be performed when replacing the following components(*marked with  on the schematic diagram). 1. Preparation before confirmation 1) Turn the POWER switch ON, and receive *signal and set the *PICTURE and BRIGHTNESS controls to adjustment. 2) Confirm that the voltage of the check terminal of *IC is more than *voltage when the set is operating normaly with *Power supply. 2. Hold-down operation confirmation. 1) Turn the POWER switch ON,and receive *signal and set the *PICTURE and BRIGHTNESS controls to adjustment. 2) Apply *DC voltage gradually to the check terminal of *IC via 1S5119 from the DC stabilized power source. Confirm that the minimum voltage is *DC whereby the raster disappears during operation of hold-down circuit. NOTE: When the hold-down circuit starts operating, switch OFF the POWER of the set immediately. 3.Hold-down readjustment When step 2 is not satisfide, readjustment should be performed by altering the resistance value of *R566 CARBON 1/4W (a component marked with ).	*Entirely white *Digital multimerer *Entirely white	* marked parts IC502, Q509, Q510, D502, C531, R554, R566, R567, R568, R569, T501..... AA Board IC620, R651..... G board *IC502 pin ① *IC502 pin ①	* R565 * R566 *PICTURE BRIGHTNESSmaximum *PICTUREmaximum BRIGHTNESSmaximum * R566	 AA board -Conductor side- DC power supply *more than 127.0V DC *148⁺⁰_{-1.0} V DC *135.0±0V DC

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
G BOARD B+ VOLTAGE CONFIRMATION				


the POWER of the set immediately.				
3.Hold-down readjustment When step 2 is not satisfide, readjustment should be performed by altering the resistance value of *R566 CARBON 1/4W (a component marked with ).			*  R566	

ADJUSTMENT ITEM AND PROCEDURE	EQUIPMENT AND SIGNAL	MEASUREMENT POSITION	ADJUSTMENT LOCATION	ILLUSTRATION AND SHAPE AND NUMBER
G BOARD B+ VOLTAGE CONFIRMATION The following adjustments should always be performed when replacing the following *compornents. 1) Supply *voltage AC to with *variable auto-transformer. 2) Input an entirely *signal. 3) Set the PICTURE control and the BRIGHTNESS control to adjustment. 4) Confirm the voltage of *connector is less than *voltage DC. 5) If step 4) is not satisfied, replace the *components repeat above steps.	* Variable auto-transformer *Monoscope	*IC620, R651 *AA board A-3 pin ①	*PICTURE, BRIGHTNESSinitial reset *IC620,R651	*130 $\pm$ ₀^{2.0} V AC *Less than 136.5 V DC

MEMO


Q (AV 1/0)




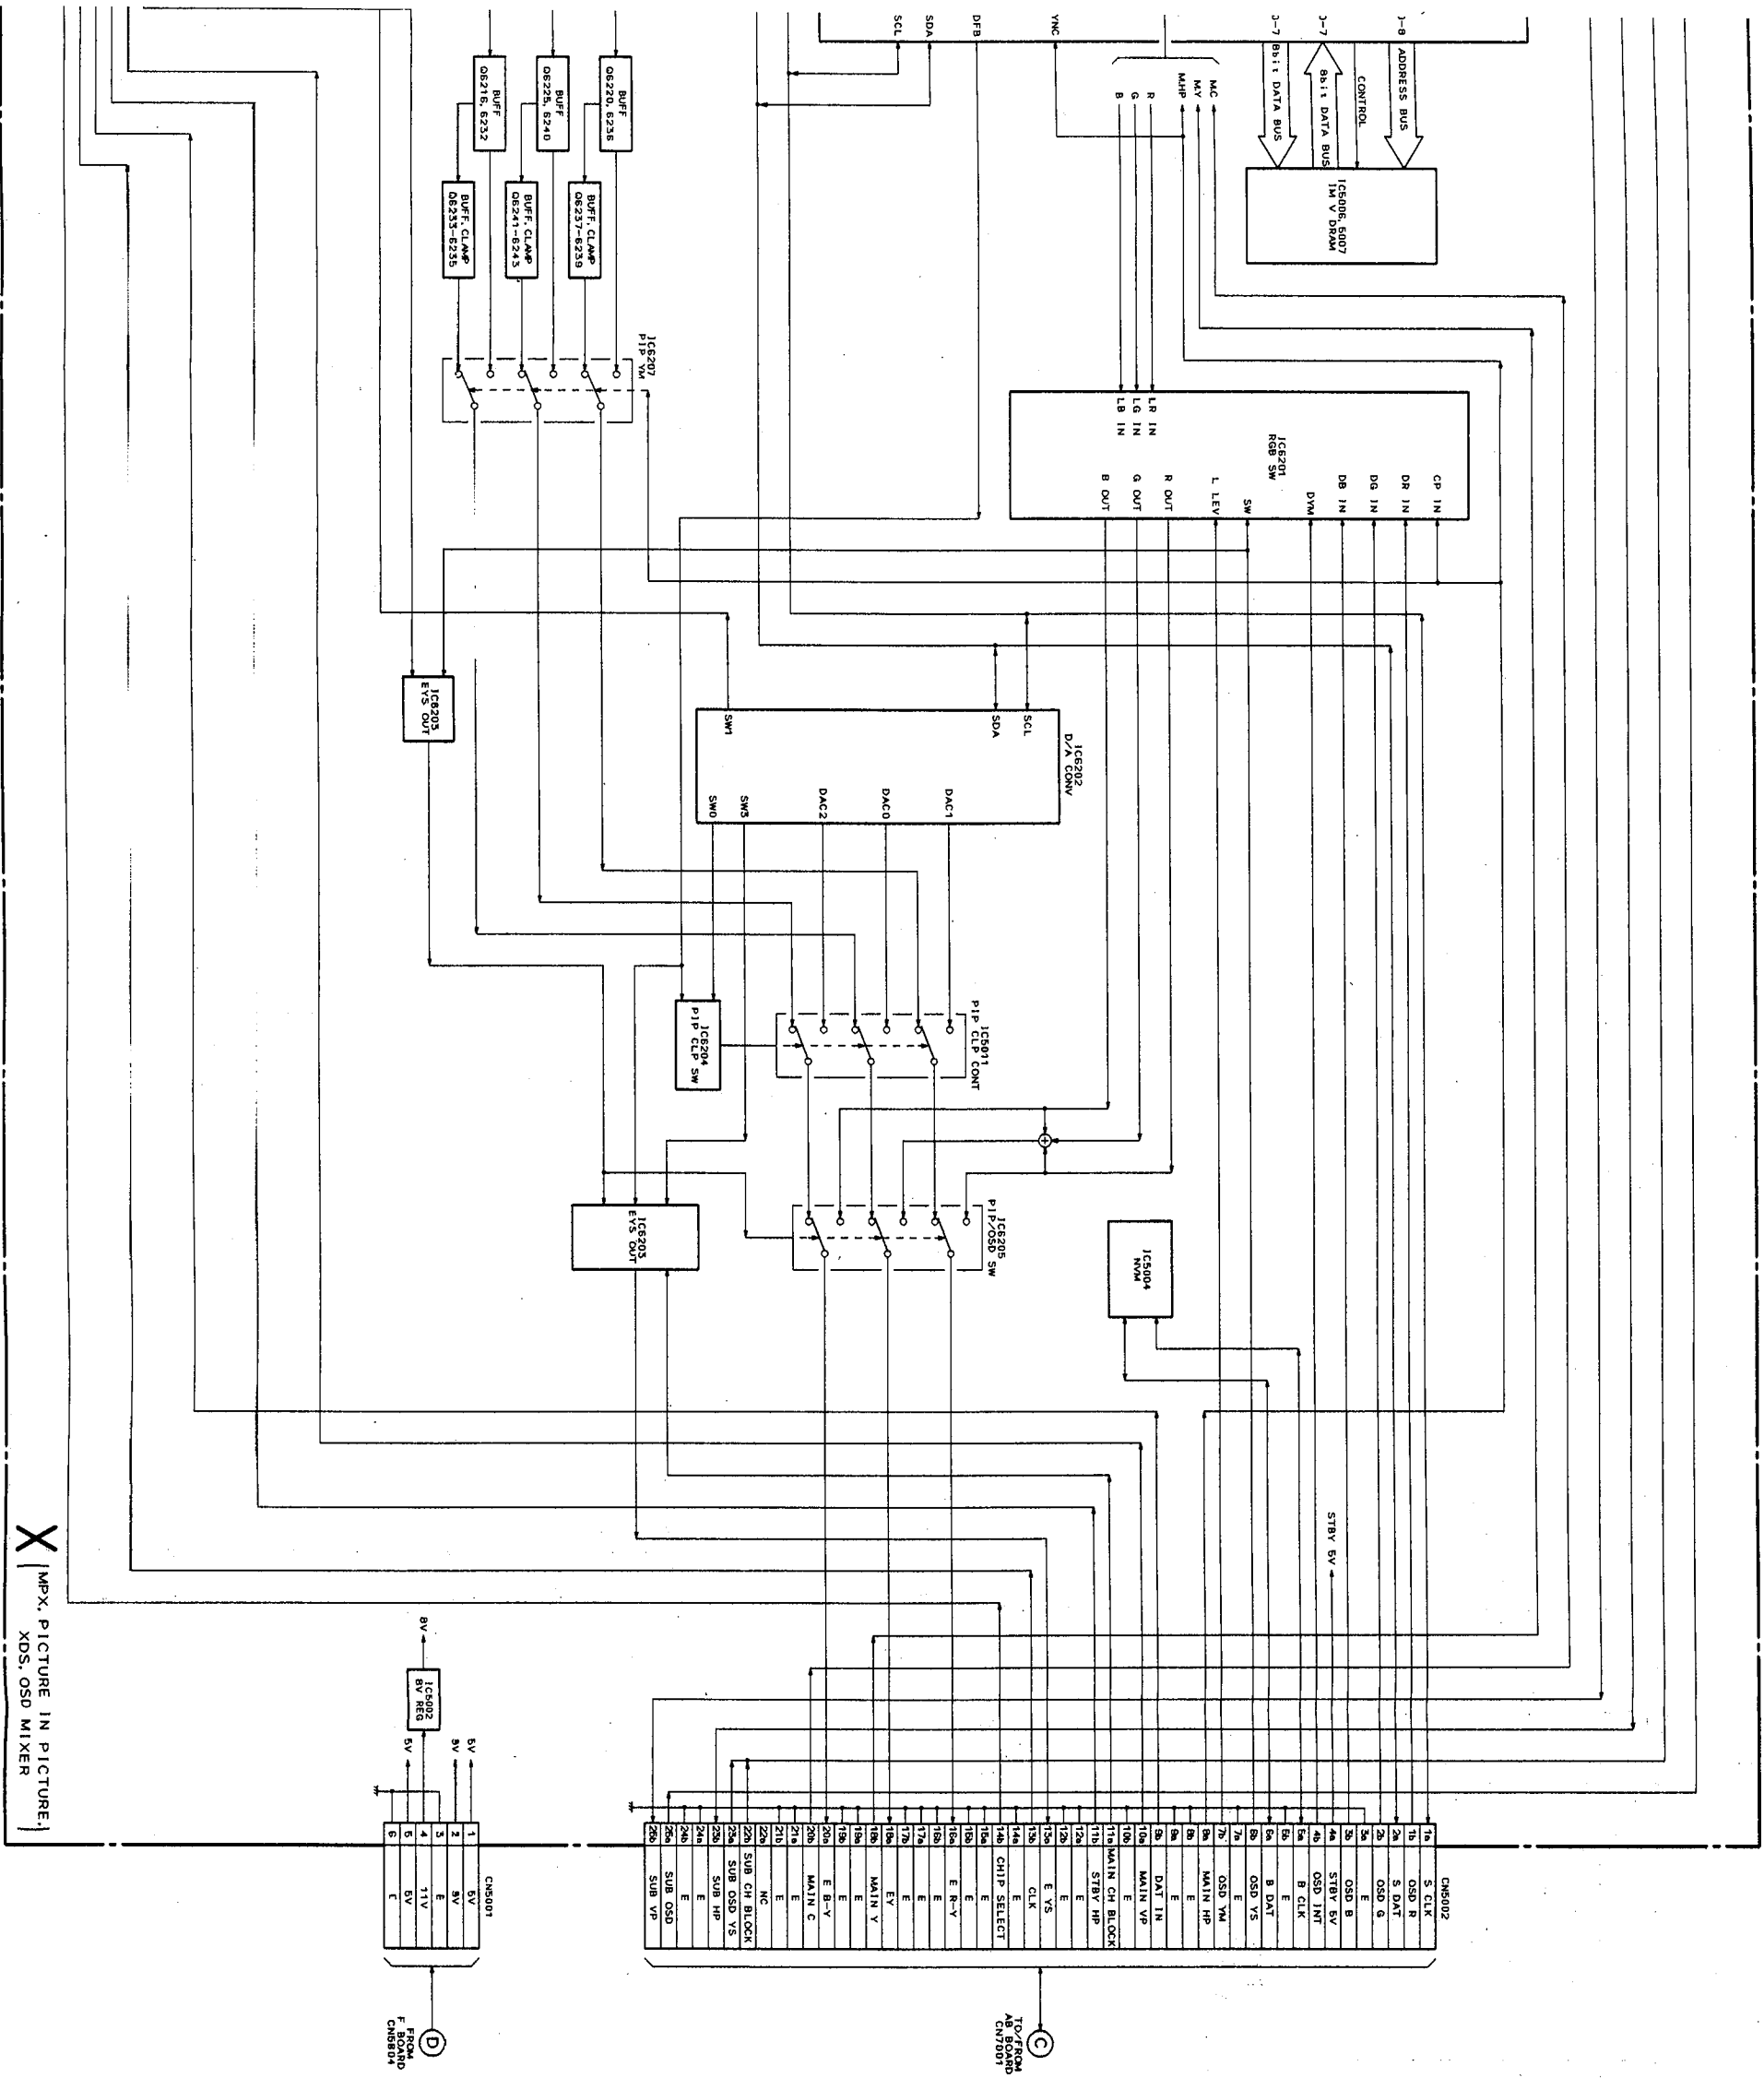


X | MPX. PICTURE IN PICTURE. |
| XDS. OSD MIXER |


BLOCK DIAGRAMS (3)

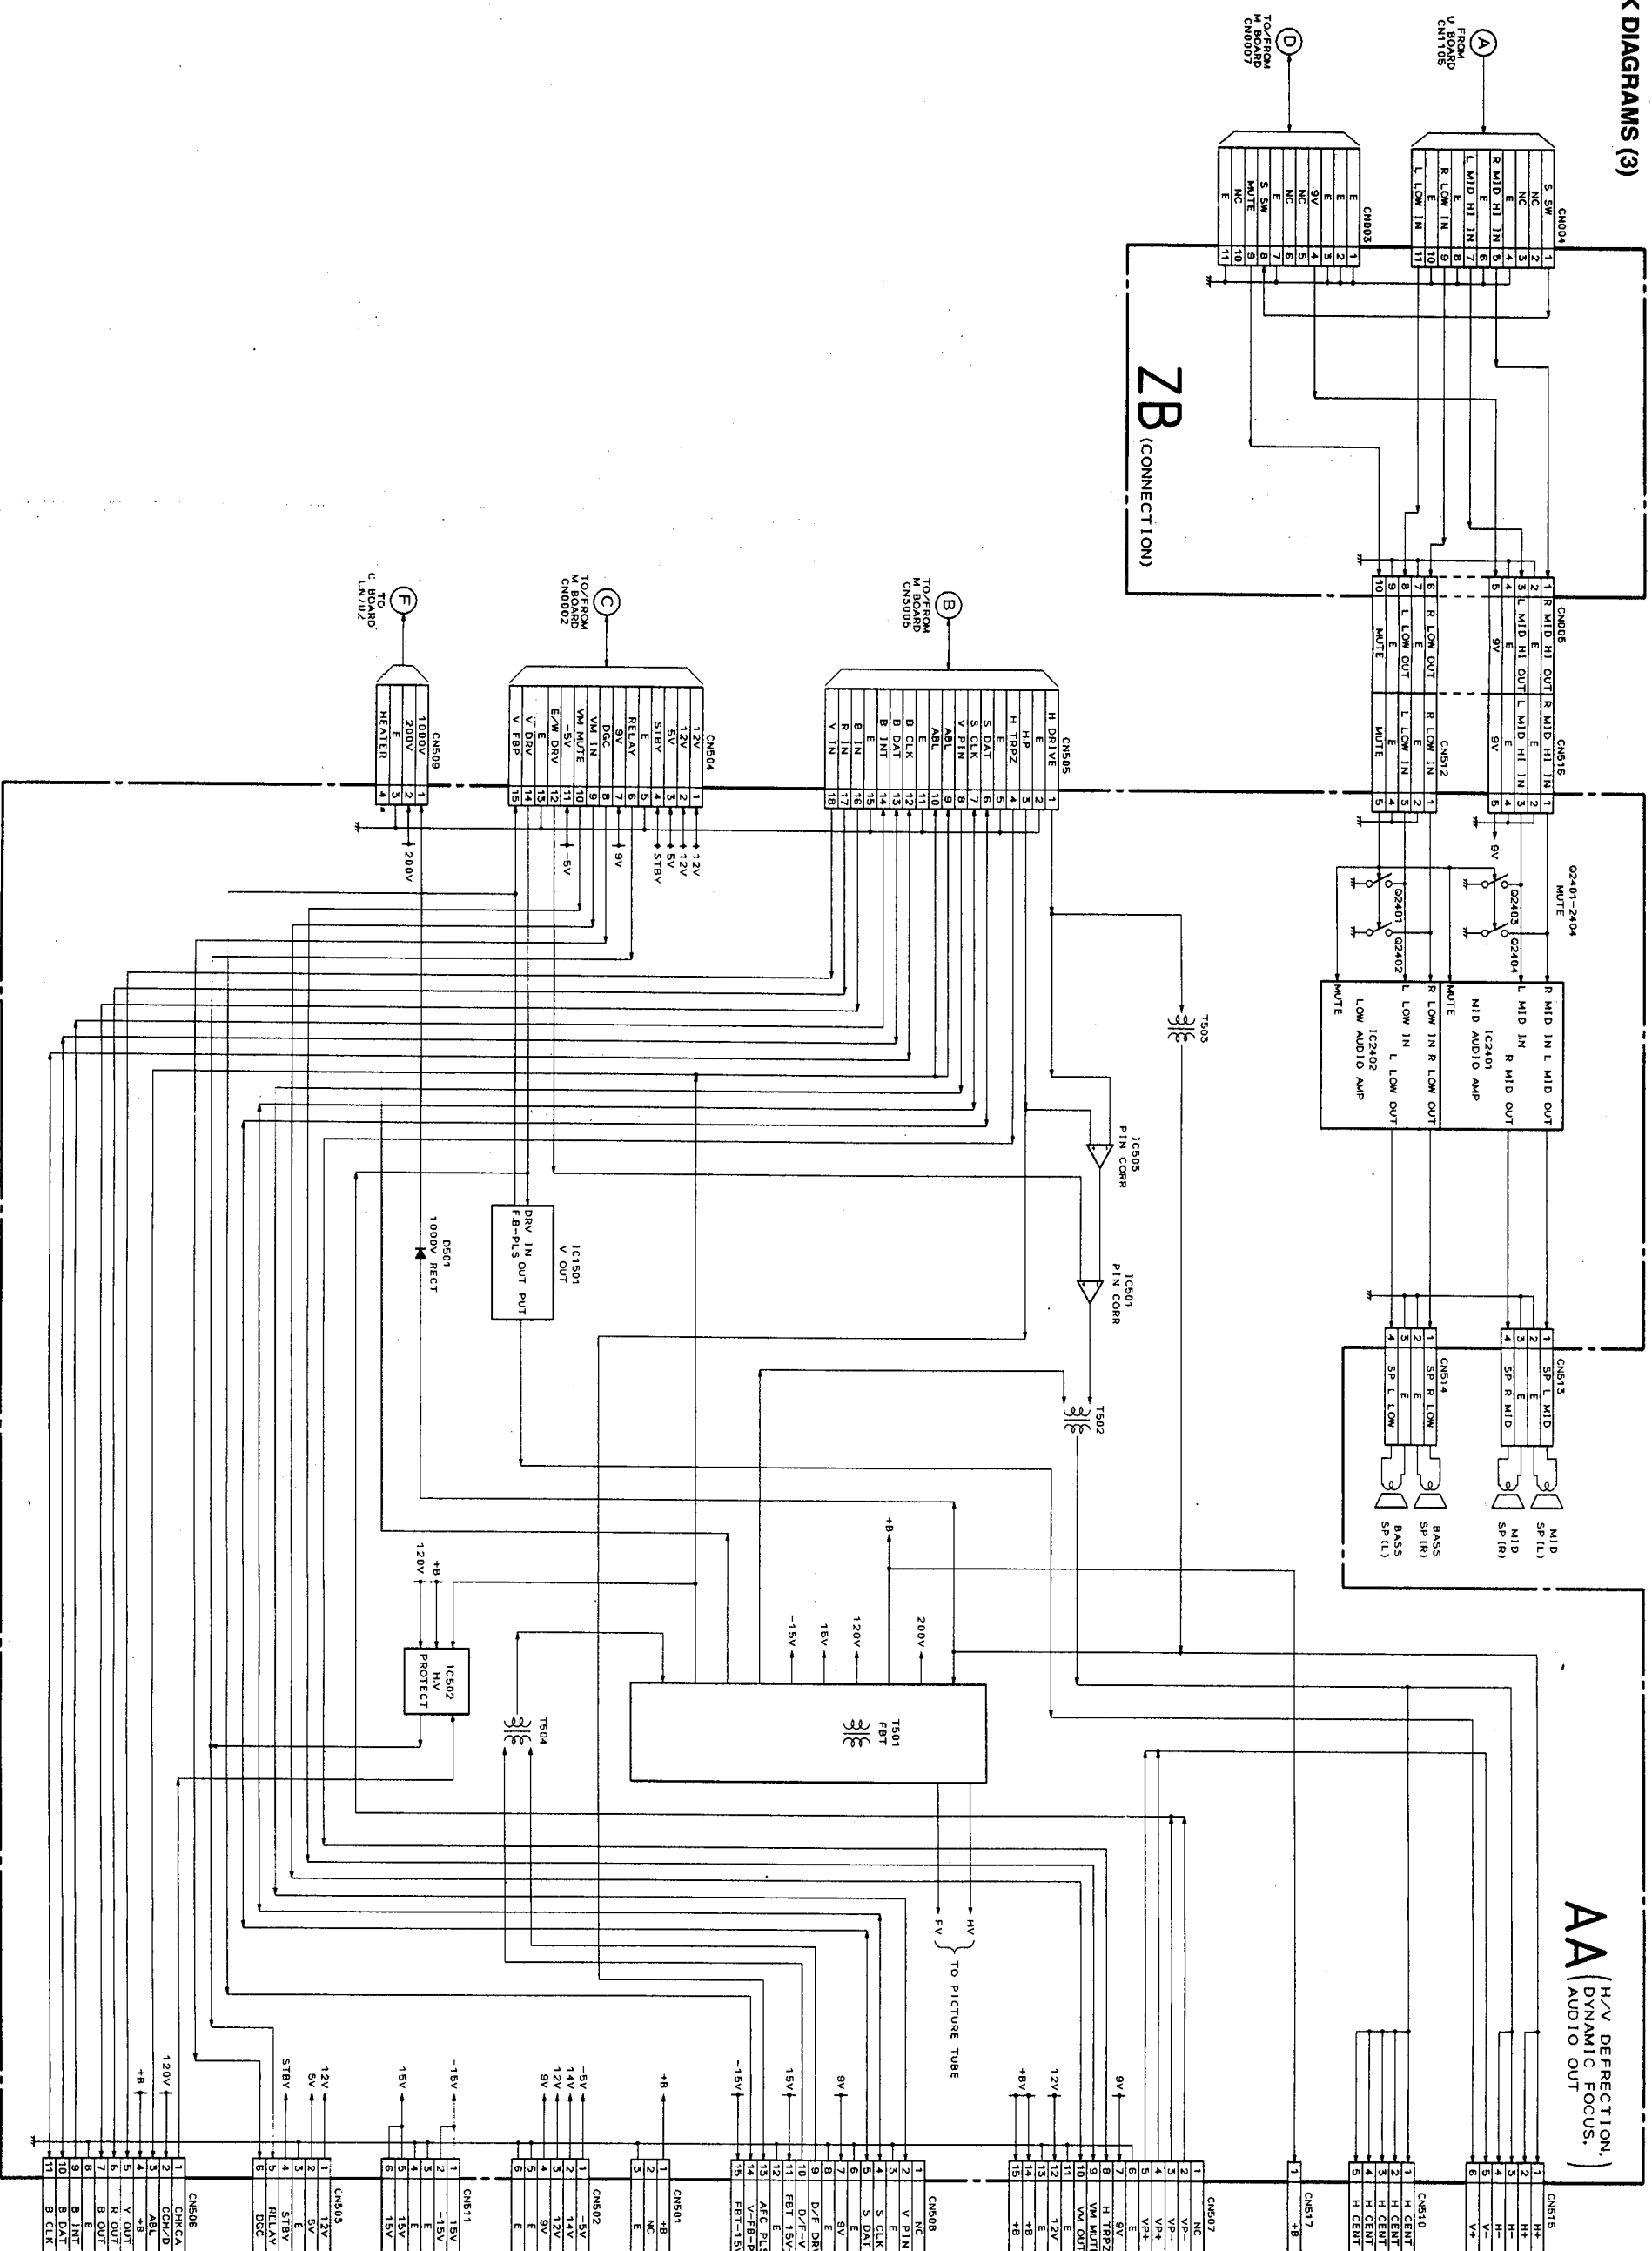

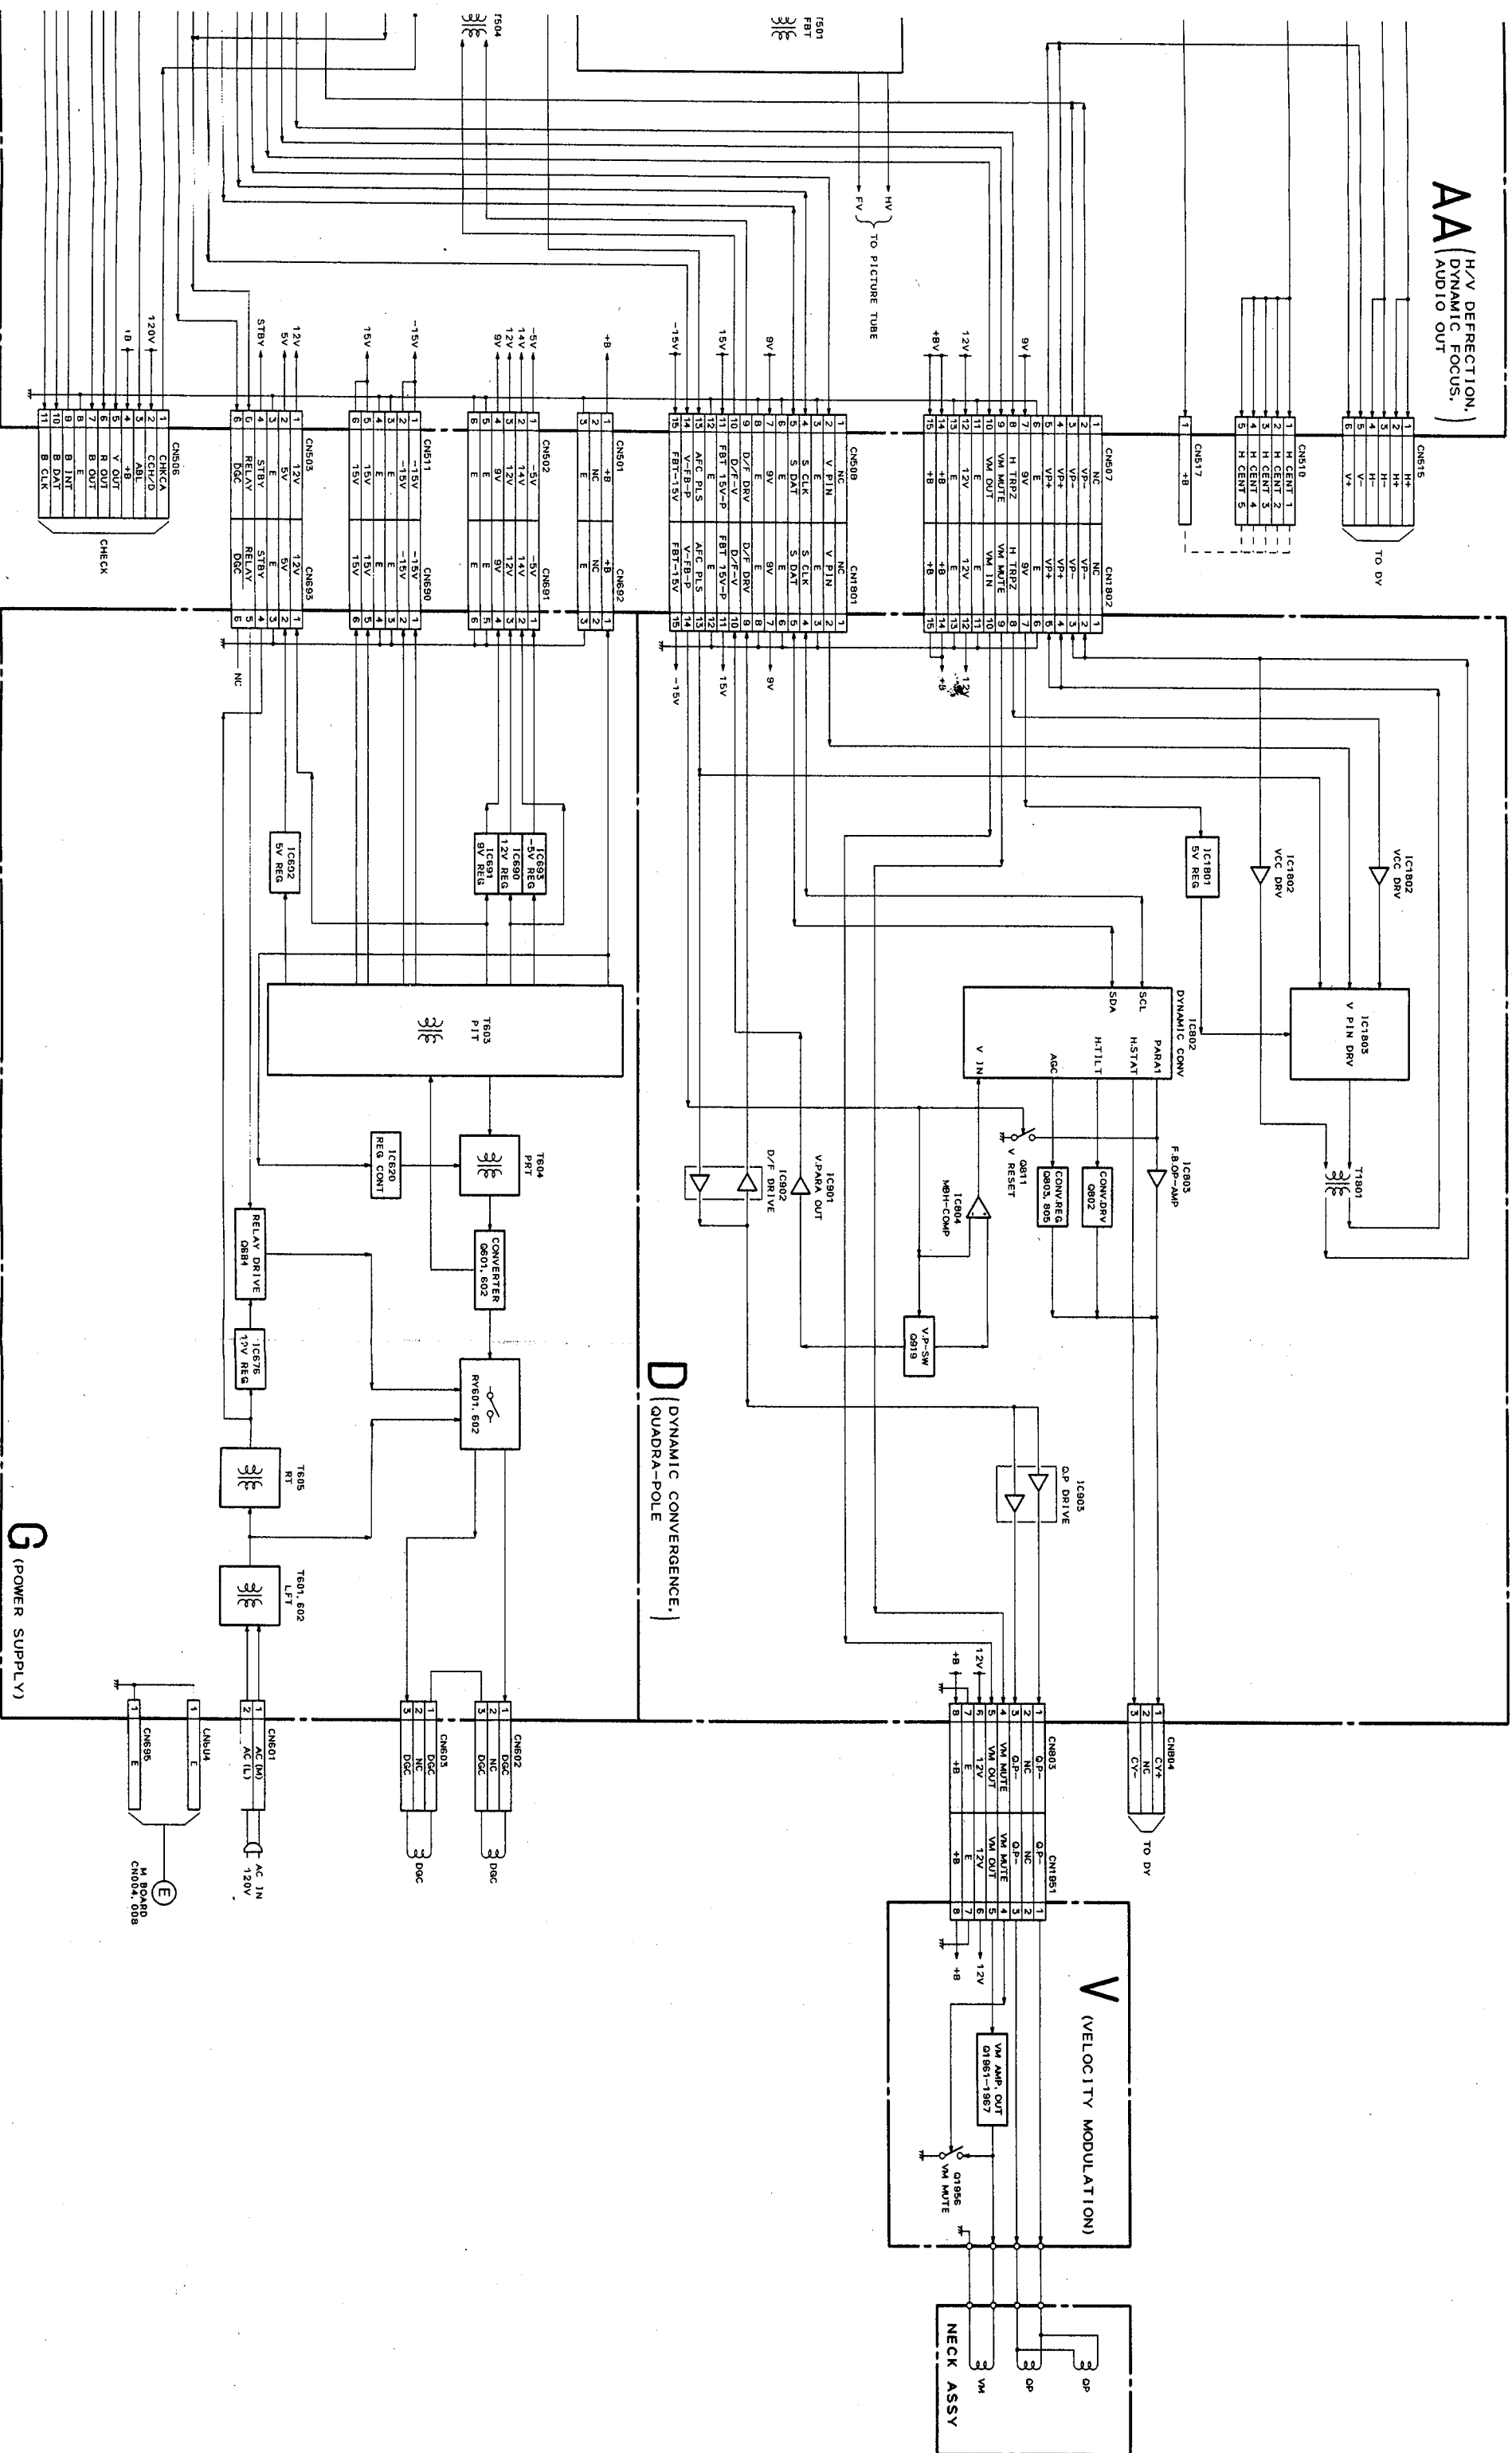

BLOCK DIAGRAMS (4)

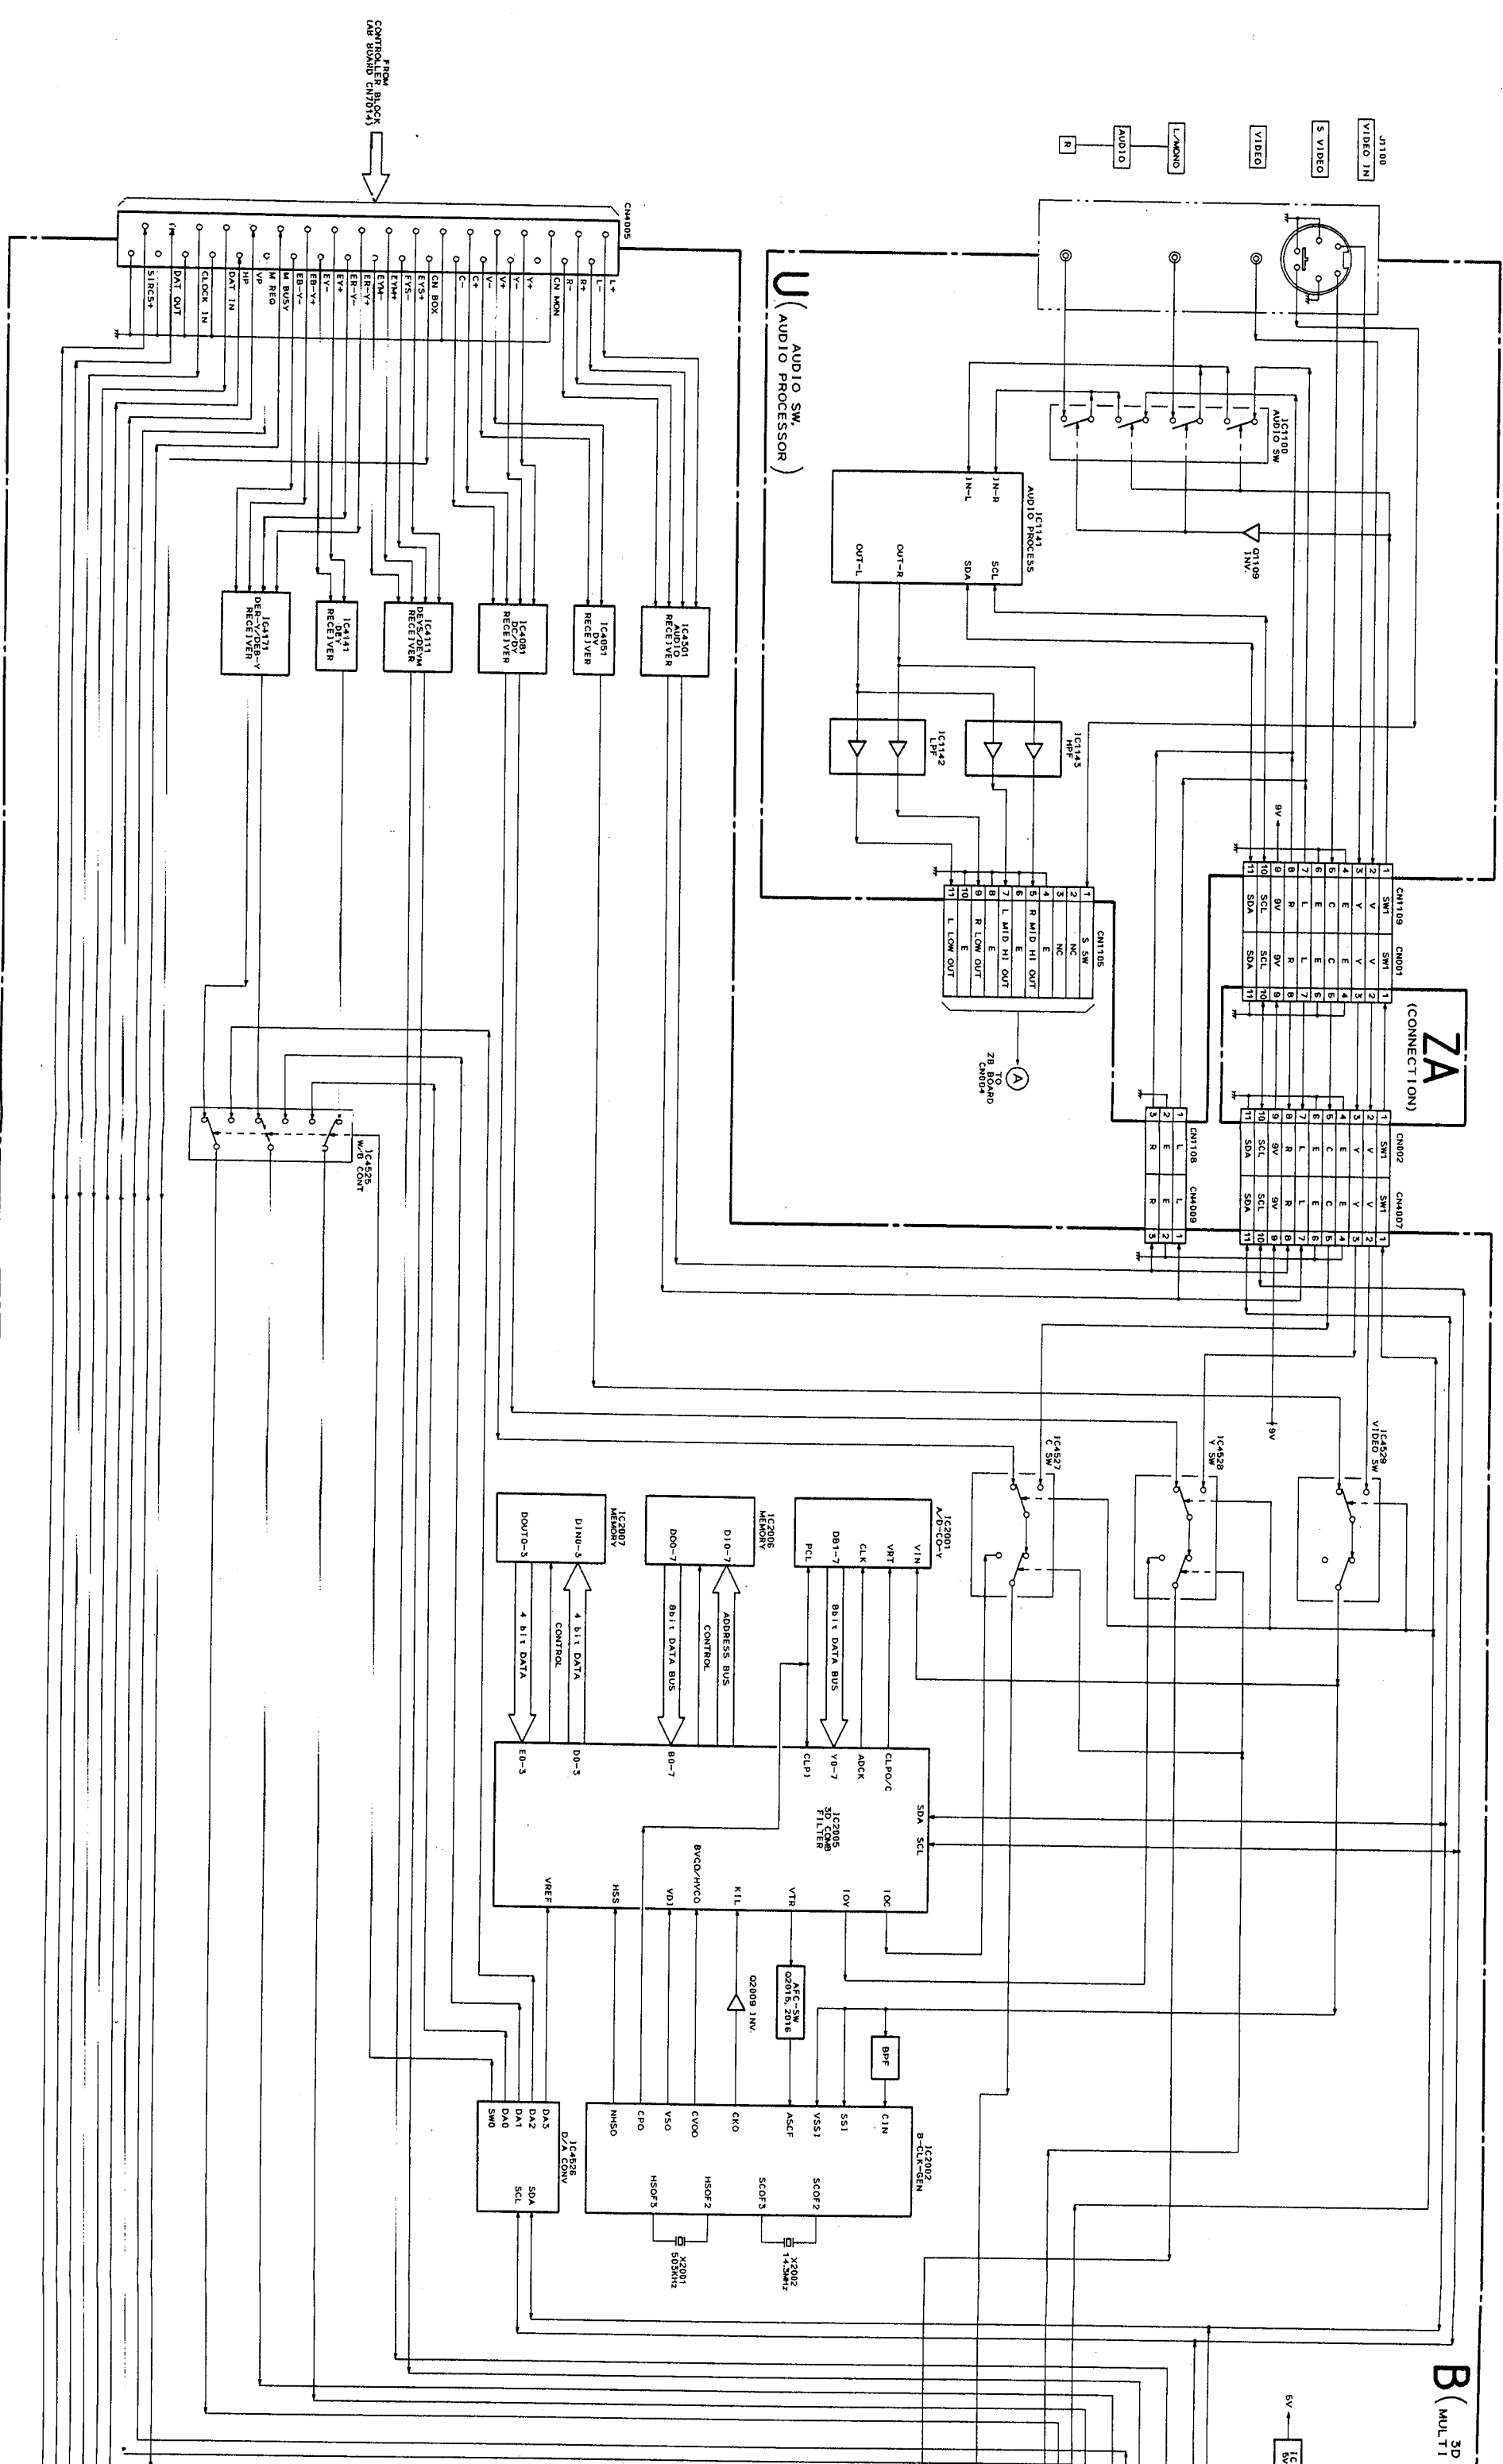

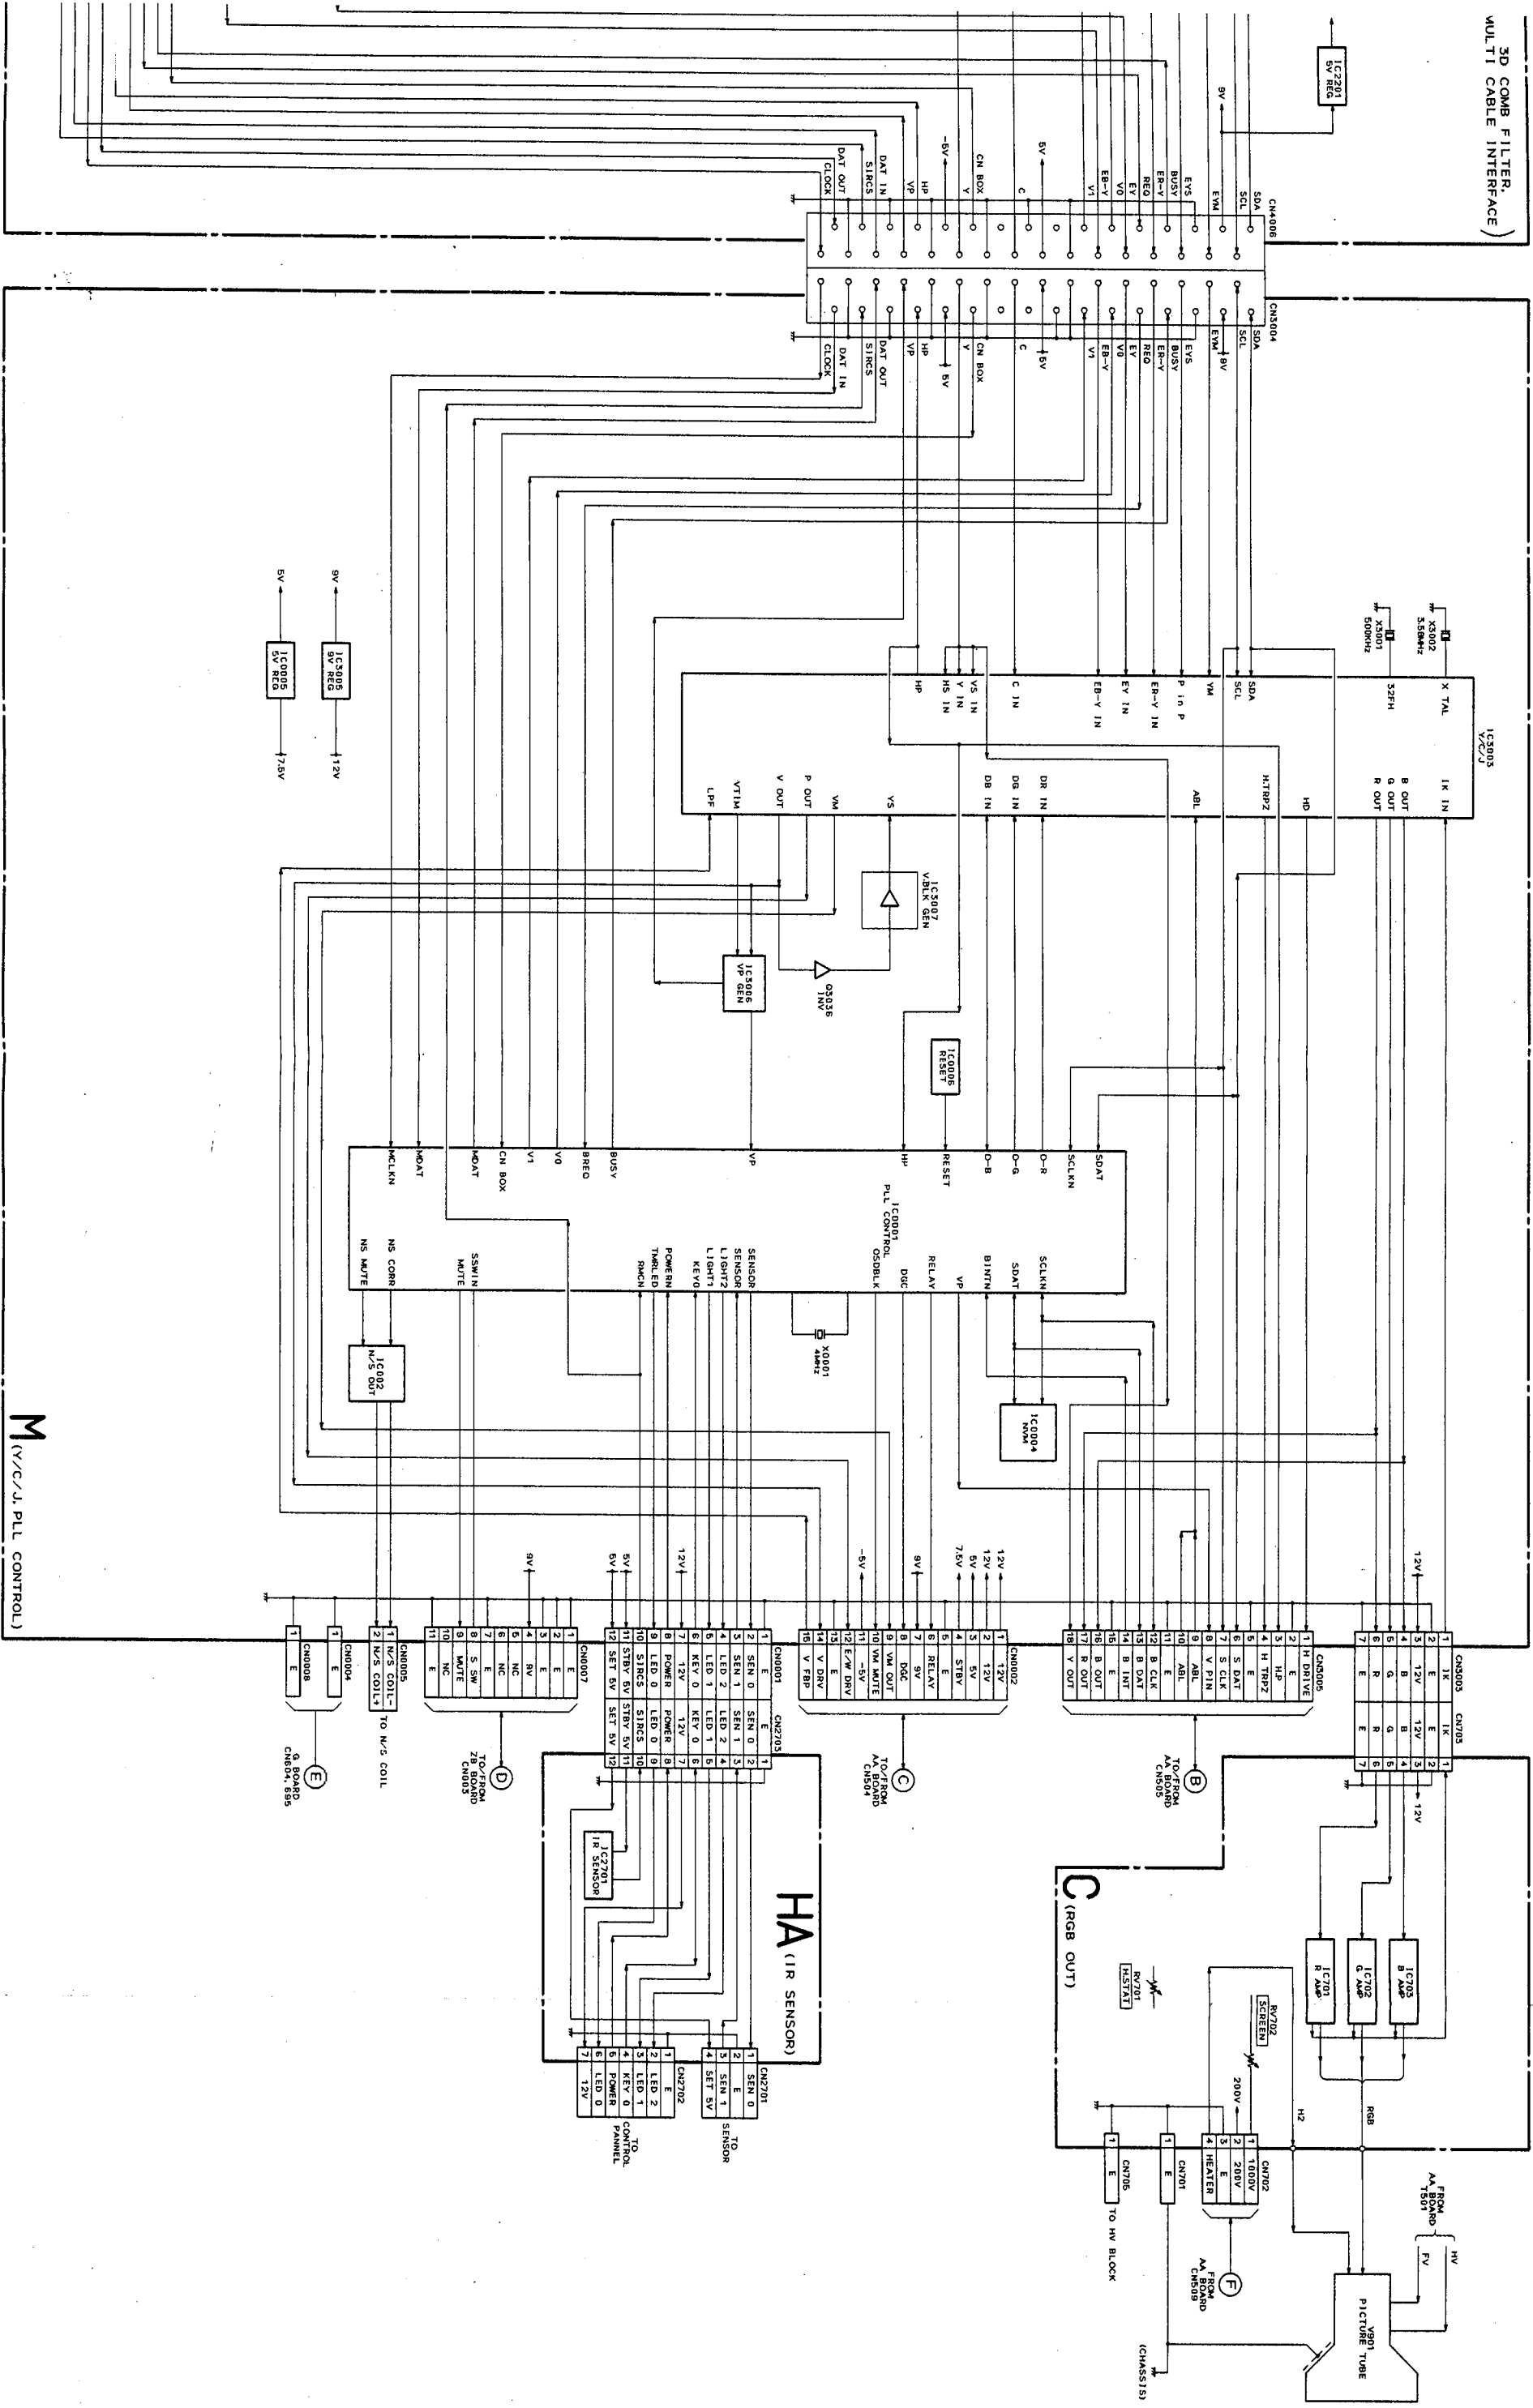


AB


MAIN-CONTROLLER, U-COM,
OSD U-COM, TUNER-VIF/SIF/MTS,
MULTI CABLE INTERFACE

- AB BOARD - (Component Side)

	Q7505	F-17
-13	Q7506	F-4
-11	Q7507	F-4
-12	Q7508	F-18
	Q7509	I-4
	Q7517	G-18
	Q7520	D-17
-12	Q7523	D-18
	Q7525	G-17
-13	Q7526	G-17
	Q7527	G-17
	Q7528	G-16
	Q7529	G-16
	Q7530	G-16
	Q7531	D-4
	Q7532	D-3
	Q7601	C-2
-16	Q7602	D-2
-17	Q7603	D-3
-17	Q7604	A-7
-18	D100E	
3-18	D7001	G-6
3-17	D7002	E-6
3-18	D7003	E-7
2-17	D7004	E-9
2-18	D7005	E-9
	D7006	F-10
	D7007	F-10
	D7008	B-9
	D7009	A-9
	D7301	H-8
	D7401	I-6
	D7402	I-6
	D7403	I-6
	D7404	I-6
	D7405	I-6
	D7406	I-6
	D7407	I-6
	D7408	I-6
	D7409	I-6

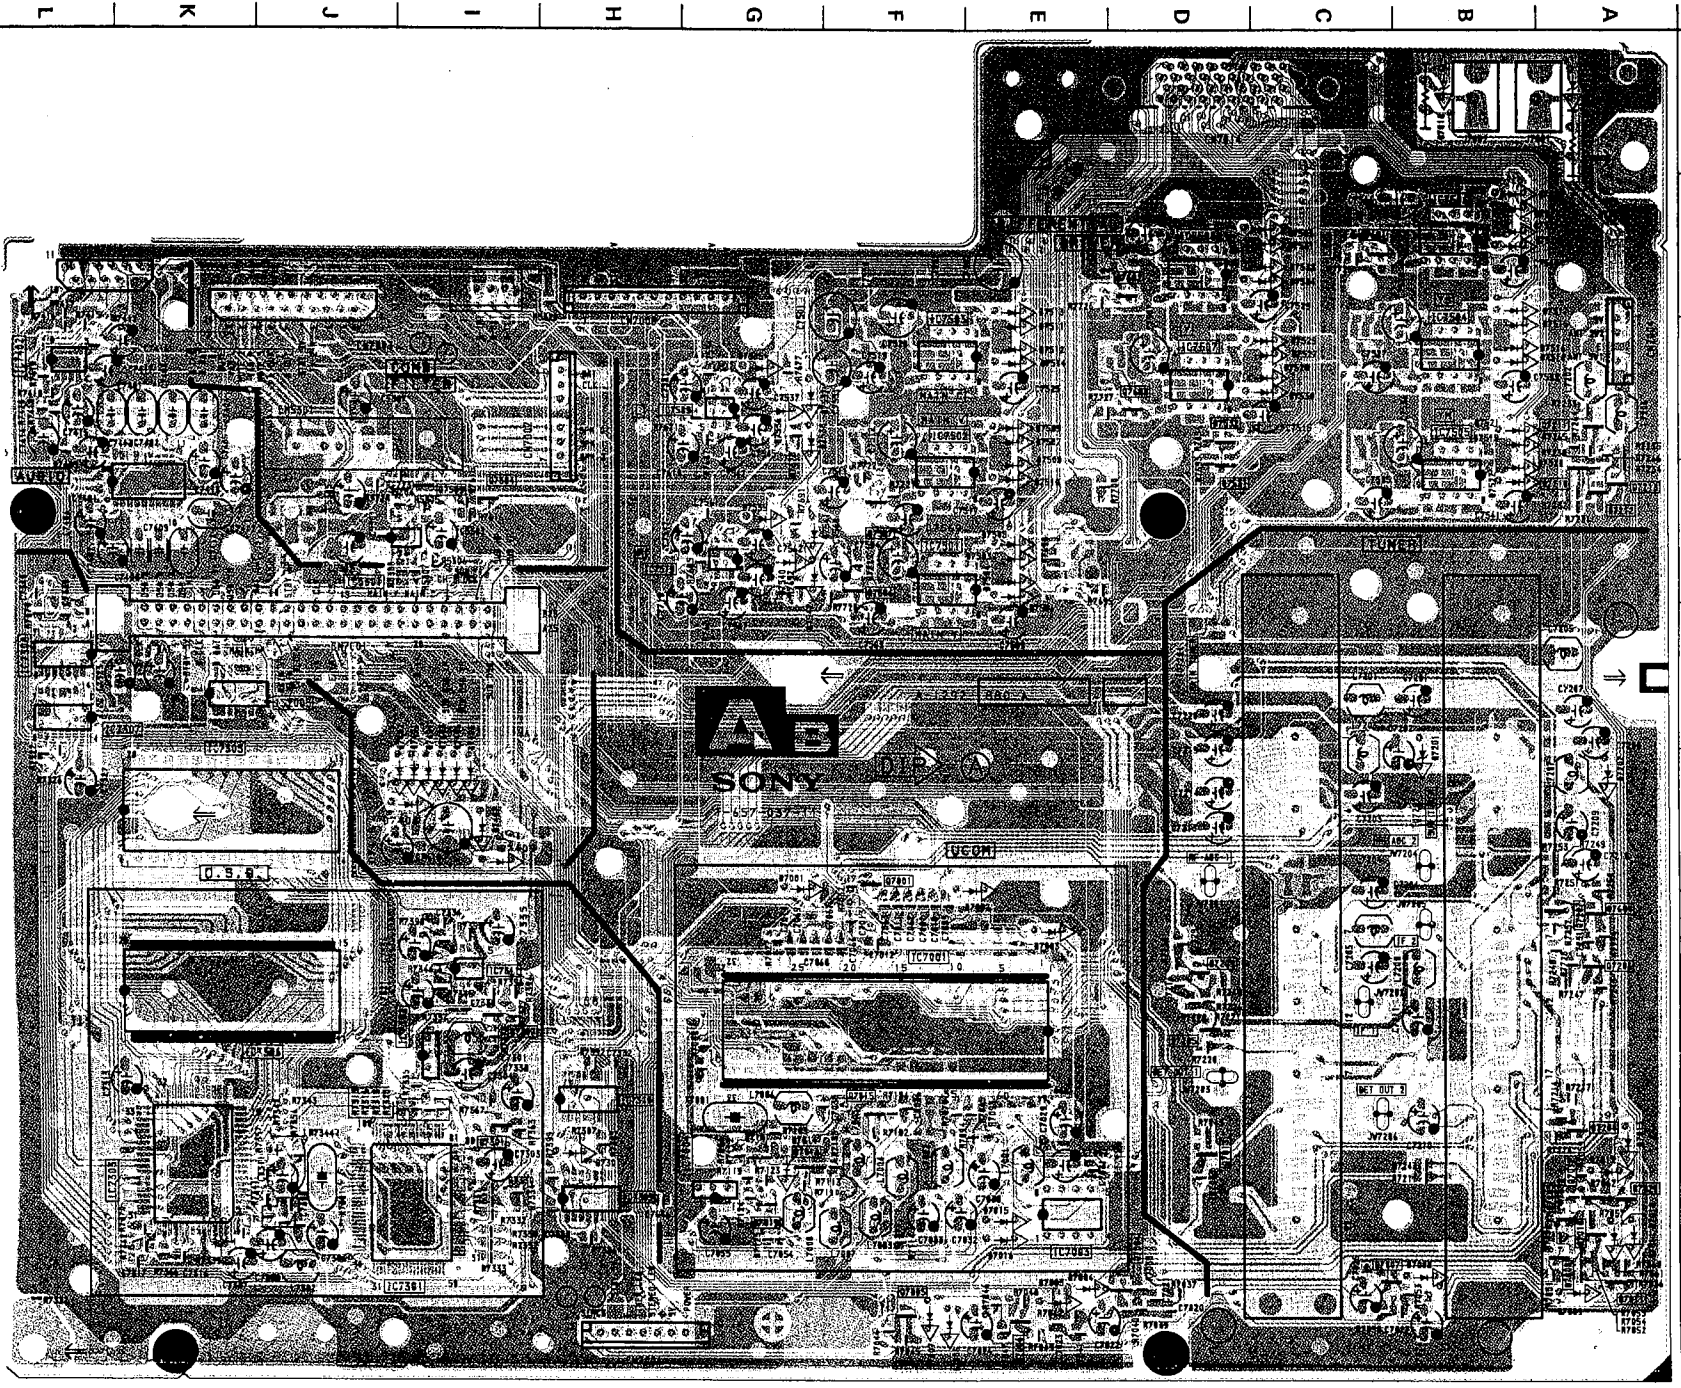

(Conductor Side)

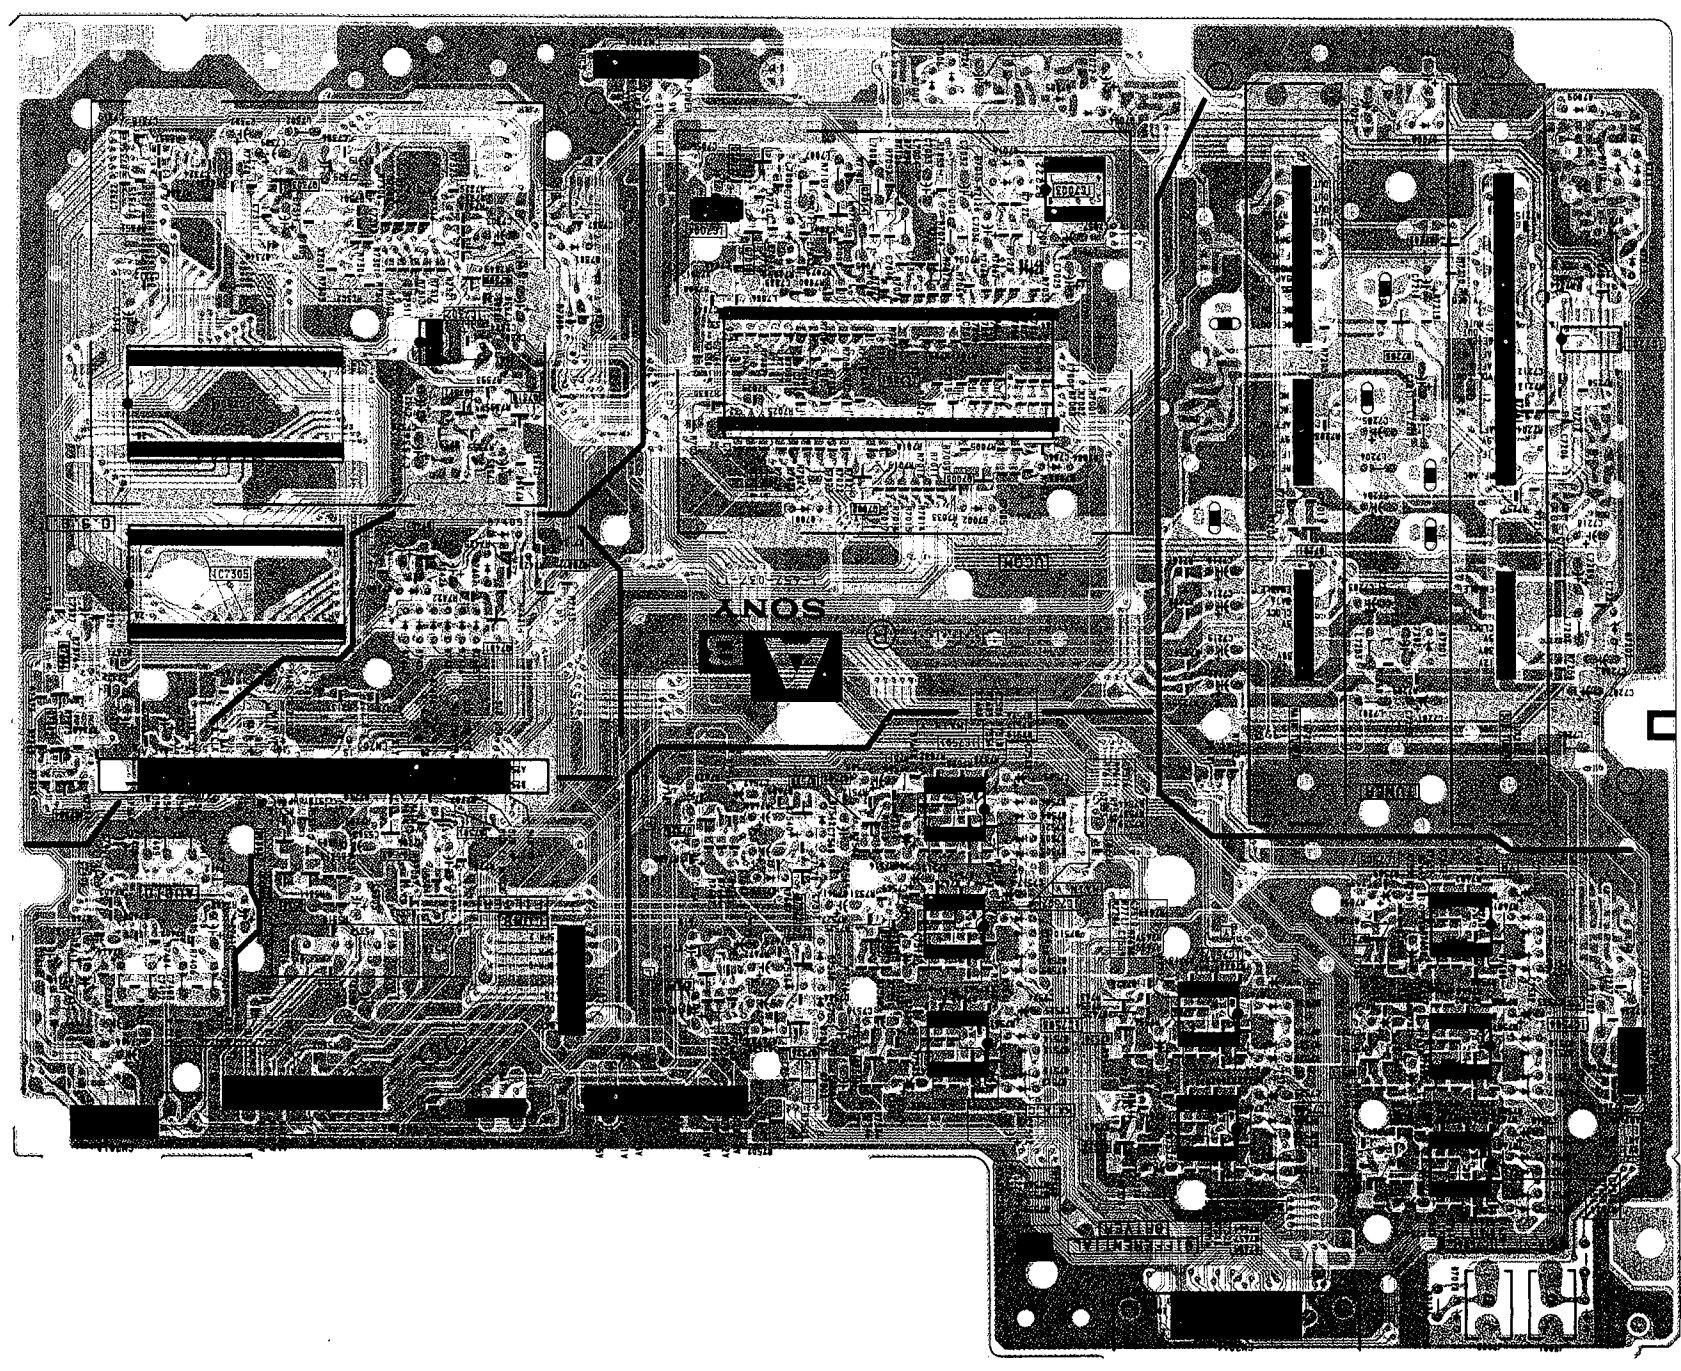


side which enables seeing
at side.



F [POWER SUPPLY] **G** [POWER SUPPLY] **C** [R. G. B. OUT]

- F BOARD -

⟨Component Side⟩

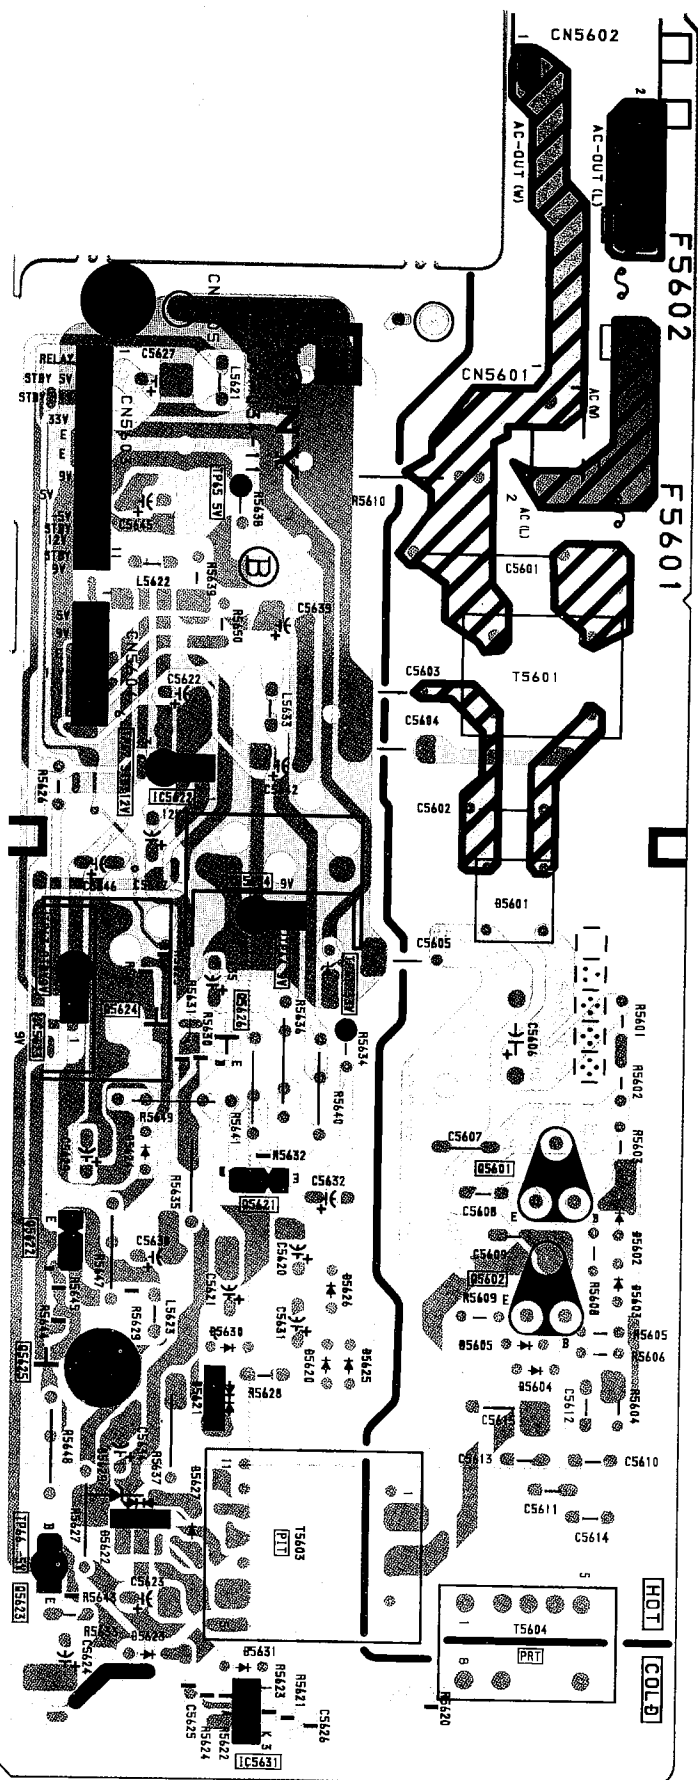

- G BOARD -

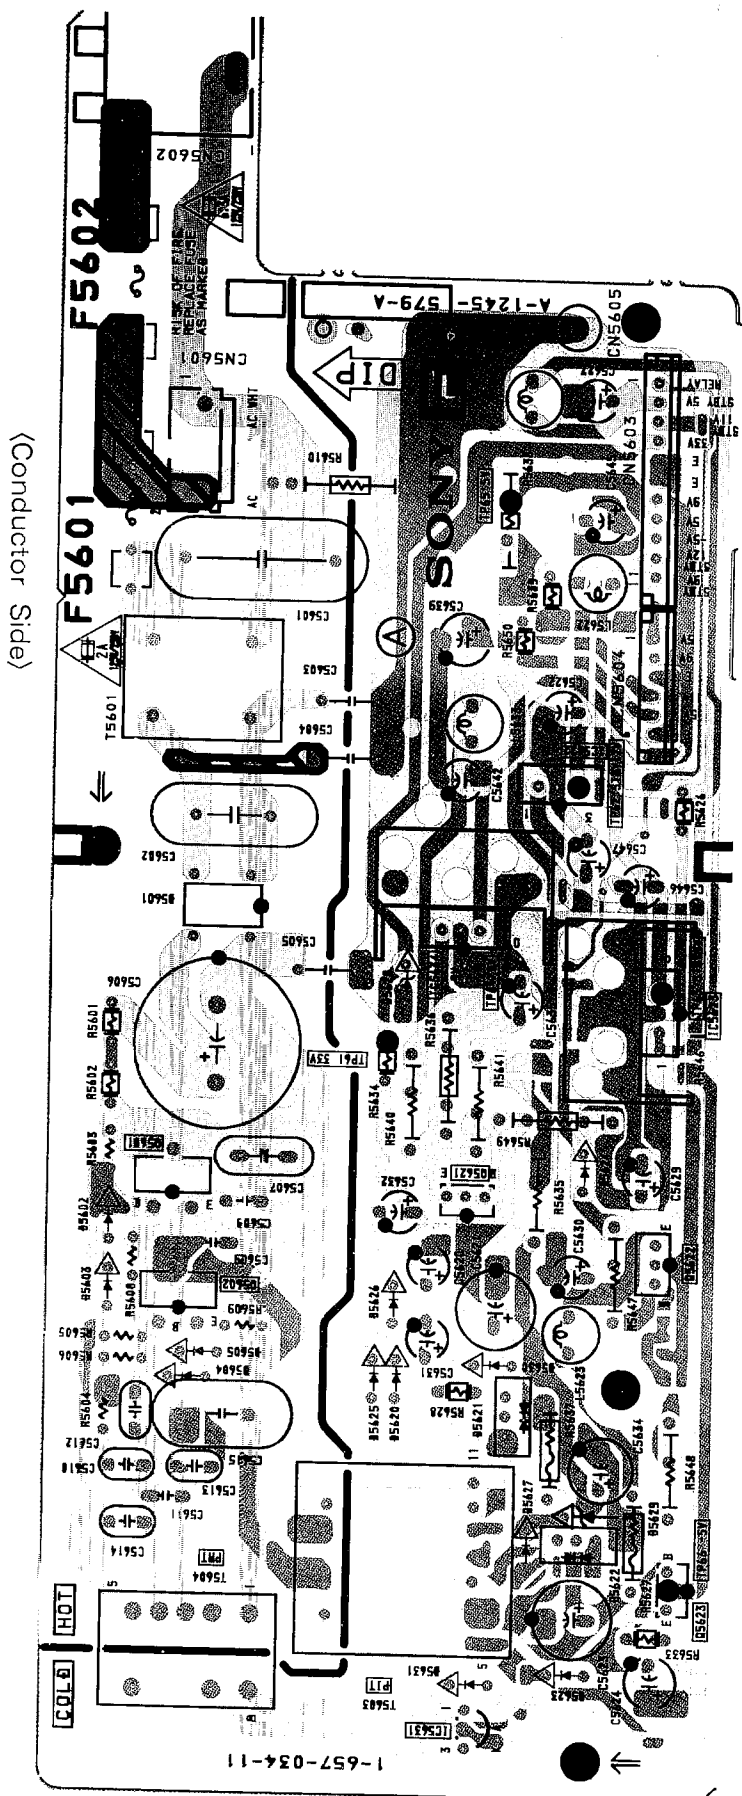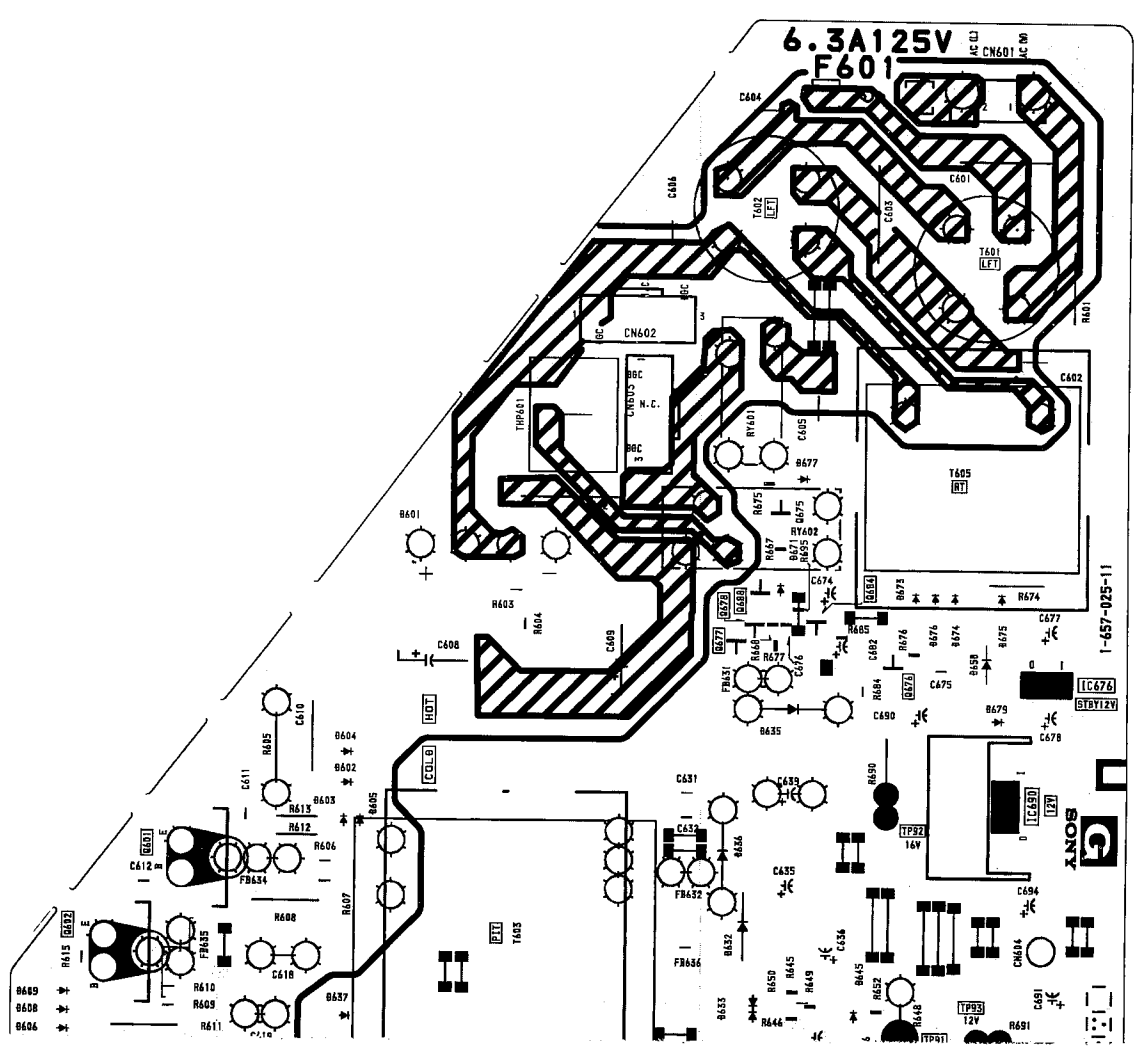

Note :
: Pattern from the side which enables seeing.
: Pattern of the rear side.

SECTION 5
EXPLODED VIEWS


Les composants identifiés par une trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark  are critical for safety. Replace only with part number specified.

- NOTE:
- Items with on part number and on description are not stocked because they are seldom required for routine service.
 - The construction parts of an assembled part are indicated with a collation number in the remark column.
 - Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

5-1. CHASSIS



- : 7-685-648-79 +BVTP 3x12
- : 7-685-663-79 +BVTP 4x16

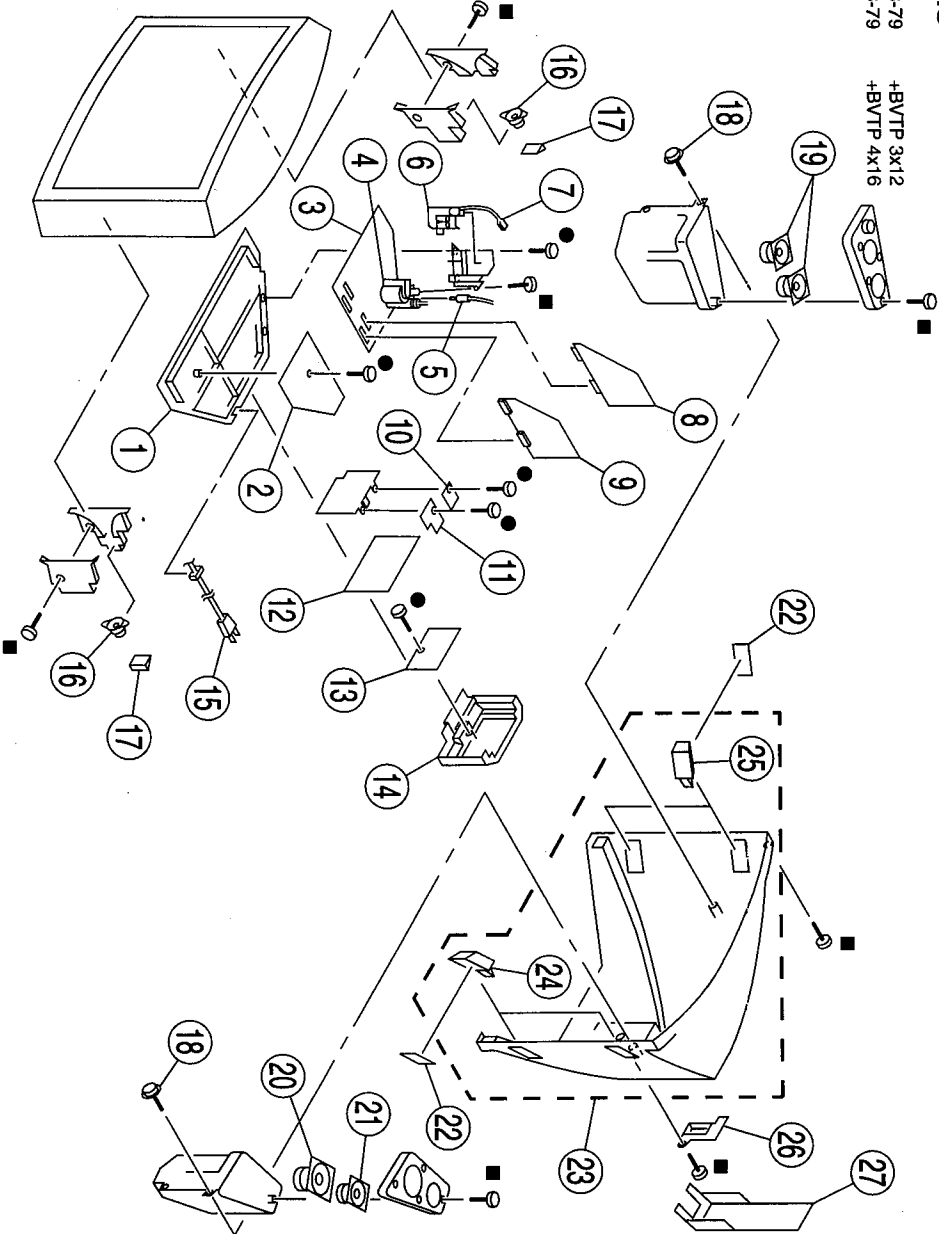

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
----------	----------	-------------	--------	----------	----------	-------------	--------


1	* 4-049-233-01	BRACKET, BASE		15	 A-1-751-1659-11	CORD, POWER (MONITOR) 10A/125V	
2	* A-116-225-A	G BOARD, COMPLETE		16	1-504-996-11	SPEAKER (5CM)	
3	* A-1297-526-A	AA BOARD, COMPLETE		17	4-049-865-01	SPACER, SPEAKER	
4	 A-X-4033-094-1	TRANSFORMER ASSY, FLYBACK (NX-3001/11U)		18	4-384-096-01	SCREW (4X16), TAPPING, +P	
5	1-900-800-29	LEAD ASSY, FOCUS		19	1-504-994-11	SPEAKER (8CM)	
6	 A-1-467-525-11	CAP BLOCK, HIGH-VOLTAGE		20	1-504-995-11	SPEAKER (10CM)	
7	1-900-800-31	LEAD ASSY, FASTEN		21	1-504-993-11	SPEAKER (8CM)	
8	* A-1346-347-A	D BOARD, COMPLETE		22	4-049-263-01	COVER, HANDLE	
9	* A-1306-504-A	M BOARD, COMPLETE		23	X-4032-928-1	COVER ASSY, REAR	24-25
10	* A-1390-525-A	ZA BOARD, COMPLETE		24	* 4-049-264-01	HANDLE, (RIGHT)	
11	* A-1390-526-A	ZB BOARD, COMPLETE		25	* 4-049-255-01	HANDLE, (LEFT)	
12	* A-1135-823-A	B BOARD, COMPLETE		26	4-049-683-	COVER, AV TERMINAL	
13	* A-1394-665-A	U BOARD, COMPLETE		27	4-049-256-01	COVER, TERMINAL	
14	4-049-254-01	BRACKET, U					

- C BOARD -

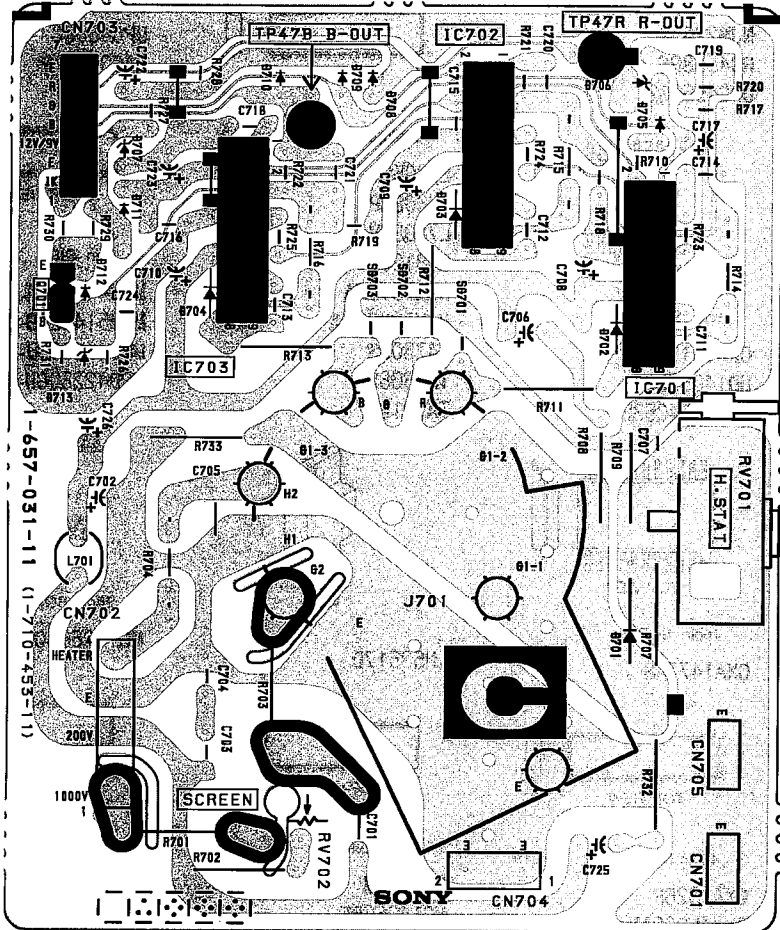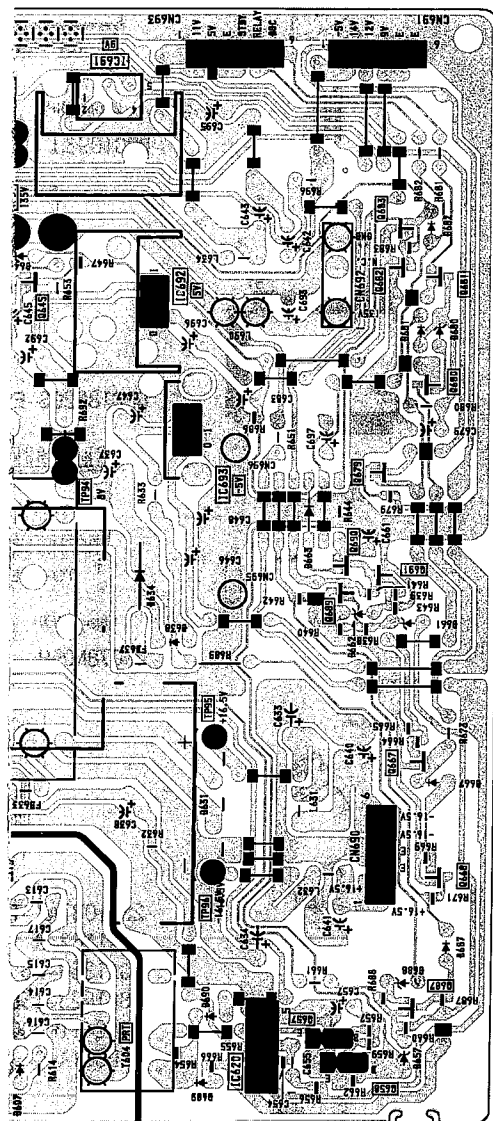


4-4. SEMICONDUCTIONS

BA7046F
CXA1211M
HD6433947-XBR2
MM1166XFB
NJM2245M
RC4558PS
UPC4558G2




8pin SOP

CXA1315M
HD14053BFP
MC74HC4053F




16pin SOP

CXA1477AS




48pin DIP

CXA1526P
SN74LS221N




16pin DIP

CXA1732M
HD74HC00FPEL
TDA8315T/N2A-T
UPC659AGS-E2




24pin SOP

CXA1845Q
MB90091-XBR2




TOP VIEW

CXP85324A-039S
CXP85340A-041S




64pin DIP

L7805CP
L7808CP
L7808CV
L7812CP
NJM7812FA
NJM78M09FA
TA7805S
TA7808S
TA7812S




LH53517D




28pin DIP

LM2901M
MC14066BF
SN74HC32ANS
SN74HC74ANS




14pin SOP

LM7905CT




M5216P
ST24C02CB1
UPC358C
UPC393C
UPC4558C
24C04A1/P




8pin DIP

M5M442256AJ-8-T2
MSM514222B-30GS-KR1
UPD42280GU-30
UPD42280GU-60-E2




28pin SOP

MC14066BCP




14pin DIP

MC14577CP




8pin DIP

MN1280-S




3pin ZIP

NJM2256M-TE2
TDA7315D013TR




20pin SOP


NJM7905FA
TA79005S



SAB9075H
UPD6486GF-3BA




SC42851CB-DA1




42pin DIP

S1-3090CA




STV9379




TDA6101Q/N3

MARKING SIDE VIEW



9pin ZIP

TDA7265



TDA7315




20pin DIP

UPC1093J



UPC1862GS-E



36pin SOP


UPC78N05H



2SA1037AK-T
2SA1162-G
2SA1330-06
2SC1623-L5L
2SC2411K-CQ
2SD601A-Q




2SA1175-HFE
2SC2785-HFC



5-2. PICTURE TUBE

- : 7-685-648-79 +BVTP 3x12
 ■ : 7-685-663-79 +BVTP 4x16
 ◇ : 7-684-023-04 +N3

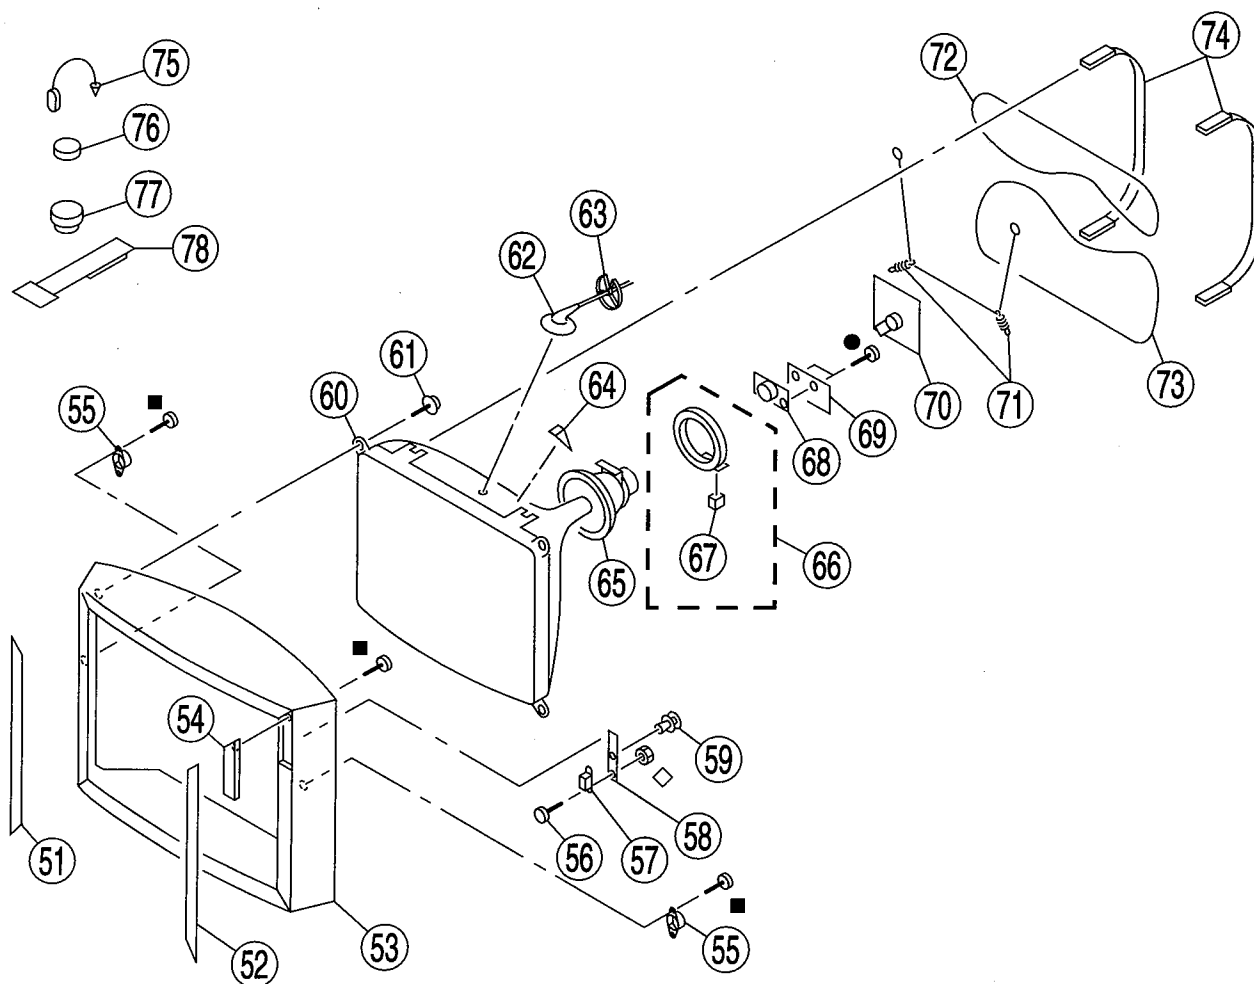


Les composants identifiés par une trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark  are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
51	4-049-258-01	GRILLE (L), SPEAKER		66	 1-452-697-11	COIL, PICTURE TUBE NECK ASSY	
52	4-049-259-01	GRILLE (R), SPEAKER				ROTATION	67
53	4-049-257-01	BEZNET		67	1-564-505-11	PLUG, CONNECTOR 2P	
54	1-473-399-11	SWITCH BLOCK		68	 1-452-616-11	NECK ASSY, PICTURE TUBE (NA323)	
55	1-504-997-11	SPEAKER (2.5CM)		69	* A-1342-270-A	V BOARD, COMPLETE	
56	4-382-854-11	SCREW (M3X10), P, SW (+)		70	* A-1331-450-A	C BOARD, COMPLETE	
57	8-749-011-10	IC GP2D05		71	4-036-329-01	SPRING (B), TENSION	
58	* A-1372-125-A	HA BOARD, COMPLETE		72	 1-406-586-11	COIL, DEMAGNETIZATION	
59	4-374-303-01	RIVET, NYLON		73	 1-406-587-11	COIL, DEMAGNETIZATION	
60	 8-733-731-05	PICTURE TUBE 34EX (SD-247/PCR)		74	4-039-644-01	HOLDER, DGC	
		(M81KVA10X)		75	4-308-870-00	CLIP, LEAD WIRE	
61	4-041-268-01	SCREW (7), TAPPING		76	1-452-032-00	MAGNET, DISC ; 10MMφ	
62	1-526-981-71	CAP ASSY, HIGH-VOLTAGE		77	1-452-094-00	MAGNET, ROTATABLE DISK; 15MMφ	
63	3-704-372-31	HOLDER, HV CABLE		78	X-4306-312-0	PERMALLOY ASSY, CONVERGENCE	
64	4-041-361-01	SPACER, DY					
65	 8-451-393-12	DEFLECTION YOKE Y34EXA (MTY)					

5-3. TUNER

● : 7-685-648-79 +BVTP 3x12
 ▲ : 7-682-547-09 +BVTT 3x6

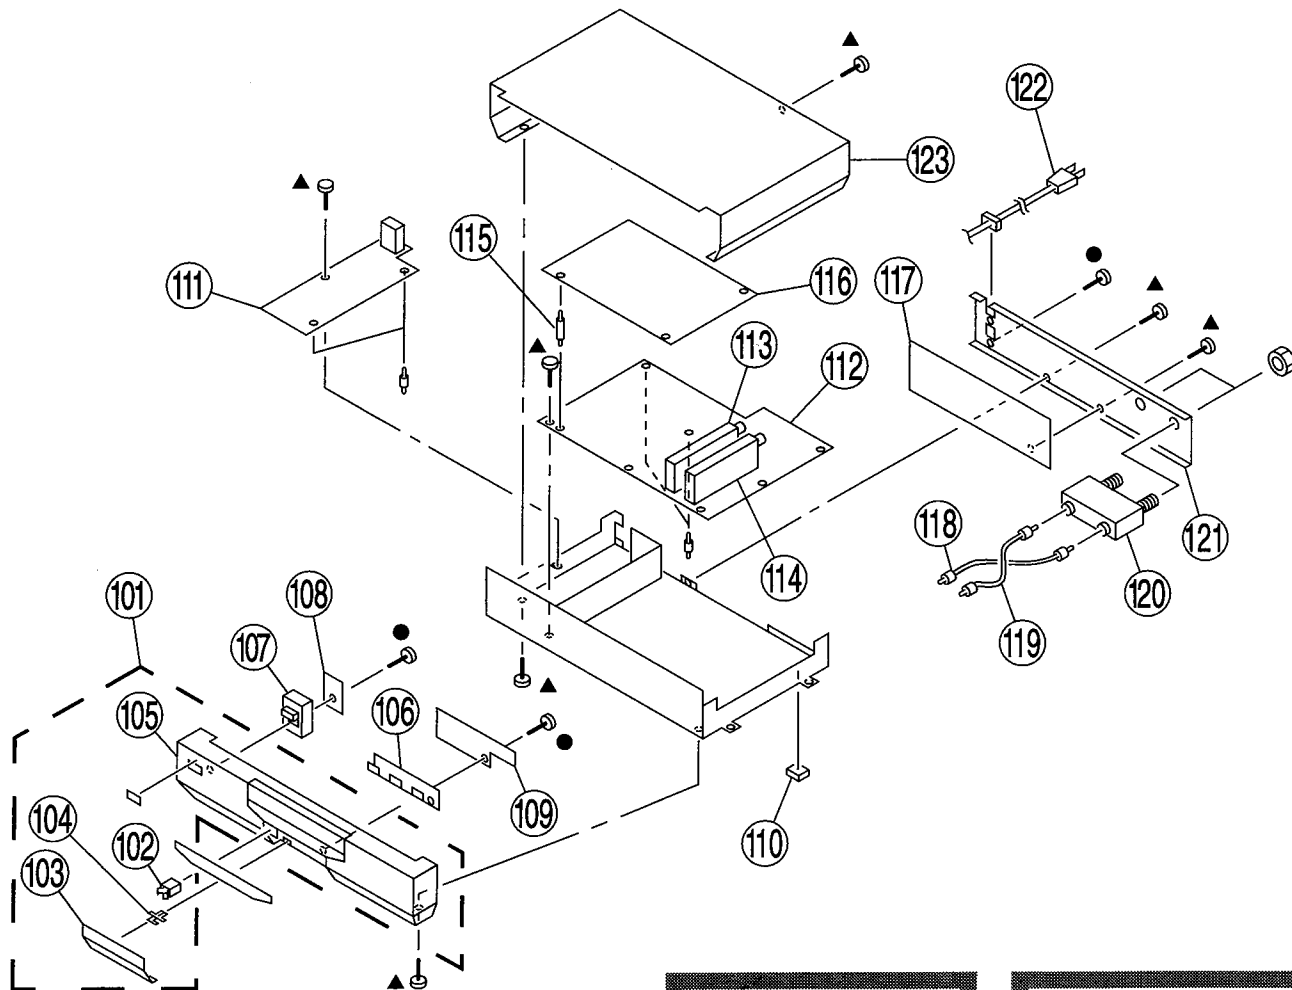

Les composants identifiés par une trame et une marque ▲ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
101	X-4032-929-1	PANEL ASSY, FRONT	102-105	113	▲ 8-598-254-00	TUNER BTF-WA402	
102	4-392-036-01	CATCHER, PUSH		114	▲ 8-598-047-11	TUNER ET BTF-LA401	
103	4-048-292-11	DOOR		115	* 4-048-280-01	SUPPORTER, PC BOARD	
104	4-045-250-01	DAMPER		116	* A-1394-666-A	X BOARD, COMPLETE	
105	4-048-307-11	PANEL, FRONT		117	* A-1275-129-A	Q BOARD, COMPLETE	
106	* 4-049-040-01	GUIDE (LED), LIGHT		118	* 1-751-135-21	CABLE, PIN	
107	4-048-291-01	BUTTON, POWER		119	* 1-751-136-21	CABLE, PIN	
108	* A-1372-127-A	HC BOARD, COMPLETE		120	1-251-321-11	SELECTOR, ANTENNA	
109	* A-1372-126-A	HR BOARD, COMPLETE		121	* 4-049-868-01	PANEL, REAR	
110	4-048-281-11	FOOT		122	▲ 1-769-837-11	CORD, POWER (WITH NOISE FILTER)	
111	* A-1245-579-A	F BOARD, COMPLETE		123	* 4-048-306-11	CASE, UPPER	
112	* A-1297-527-A	AB BOARD, COMPLETE					

SECTION 6

ELECTRICAL PARTS LIST

B

NOTE:

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

• The components identified by $\boxtimes$ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

• Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

• All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

RESISTORS

- All resistors are in ohms
- F : nonflammable

When indicating parts by reference number, please include the board name.

• CAPACITORS

PF : μ F

• There are some cases the reference number on one board overlaps on the other board. Therefore, when ordering parts by the reference number, please include the board name.

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
* A-1135-823-A B BOARD, COMPLETE *****							
<CAPACITOR>							
C2001	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2057	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C2002	1-126-967-11	ELECT 47 μ F	20% 16V	C2058	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C2003	1-163-243-11	CERAMIC CHIP 47PF	5% 50V	C2059	1-126-964-11	ELECT 10 μ F	20% 50V
C2004	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C2060	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C2005	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2066	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2006	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2067	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2008	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C2072	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2009	1-126-933-11	ELECT 100 μ F	20% 10V	C2073	1-124-903-11	ELECT 1 μ F	20% 50V
C2010	1-163-121-00	CERAMIC CHIP 150PF	5% 50V	C2074	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2012	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2076	1-126-967-11	ELECT 47 μ F	20% 16V
C2013	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2077	1-163-097-00	CERAMIC CHIP 15PF	5% 50V
C2014	1-163-097-00	CERAMIC CHIP 15PF	5% 50V	C2078	1-126-964-11	ELECT 10 μ F	20% 50V
C2015	1-126-967-11	ELECT 47 μ F	20% 16V	C2079	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2016	1-126-964-11	ELECT 10 μ F	20% 50V	C2080	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2017	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2081	1-163-251-11	CERAMIC CHIP 100PF	5% 50V
C2018	1-126-964-11	ELECT 10 μ F	20% 50V	C2082	1-126-967-11	ELECT 47 μ F	20% 16V
C2019	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2083	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V
C2020	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2085	1-164-346-11	CERAMIC CHIP 1 μ F	16V
C2021	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2086	1-163-097-00	CERAMIC CHIP 15PF	5% 50V
C2022	1-124-903-11	ELECT 1 μ F	20% 50V	C2087	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V
C2023	1-124-903-11	ELECT 1 μ F	20% 50V	C2088	1-126-964-11	ELECT 10 μ F	20% 50V
C2024	1-126-964-11	ELECT 10 μ F	20% 50V	C2089	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2025	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C2090	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2026	1-163-275-11	CERAMIC CHIP 0.001 μ F	5% 50V	C2092	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2027	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C2093	1-126-964-11	ELECT 10 μ F	20% 50V
C2028	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C2094	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V
C2029	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C2096	1-126-967-11	ELECT 47 μ F	20% 16V
C2030	1-163-125-00	CERAMIC CHIP 220PF	5% 50V	C2097	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2031	1-163-145-00	CERAMIC CHIP 0.0015 μ F	5% 50V	C2098	1-126-967-11	ELECT 47 μ F	20% 16V
C2032	1-124-902-00	ELECT 0.47 μ F	20% 50V	C2099	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2033	1-163-105-00	CERAMIC CHIP 33PF	5% 50V	C2102	1-126-967-11	ELECT 47 μ F	20% 16V
C2035	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2103	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V
C2036	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V	C2104	1-126-964-11	ELECT 10 μ F	20% 50V
C2037	1-163-038-91	CERAMIC CHIP 0.1 μ F	25V	C2105	1-124-927-11	ELECT 4.7 μ F	20% 50V
C2038	1-124-927-11	ELECT 4.7 μ F	20% 50V	C2203	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2040	1-126-967-11	ELECT 47 μ F	20% 16V	C2204	1-126-964-11	ELECT 10 μ F	20% 50V
C2042	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C2206	1-126-967-11	ELECT 47 μ F	20% 16V
C2043	1-163-235-11	CERAMIC CHIP 22PF	5% 50V	C2207	1-126-933-11	ELECT 100 μ F	20% 16V
C2044	1-124-927-11	ELECT 4.7 μ F	20% 50V	C2209	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2045	1-126-967-11	ELECT 47 μ F	20% 16V	C2210	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2047	1-163-227-11	CERAMIC CHIP 10PF	0.5PF 50V	C2215	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C2048	1-163-113-00	CERAMIC CHIP 68PF	5% 50V	C2216	1-126-964-11	ELECT 10 μ F	20% 50V
C2049	1-126-967-11	ELECT 47 μ F	20% 16V	C4051	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2050	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C4052	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
C2055	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V	C4053	1-126-933-11	ELECT 100 μ F	20% 16V
C2056	1-126-964-11	ELECT 10 μ F	20% 50V	C4054	1-126-933-11	ELECT 100 μ F	20% 16V
				C4081	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
				C4082	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
				C4105	1-126-934-11	ELECT 220 μ F	20% 16V
				C4111	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
				C4112	1-164-004-11	CERAMIC CHIP 0.1 μ F	10% 25V
				C4113	1-124-903-11	ELECT 1 μ F	20% 50V
				C4115	1-124-903-11	ELECT 1 μ F	20% 50V

B

REF. NO.	PART NO.	DESCRIPTION	REMARK
C4121	1-164-232-11	CERAMIC CHIP 0.01μF 10%	50V
C4122	1-164-232-11	CERAMIC CHIP 0.01μF 10%	50V
C4141	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4142	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4143	1-126-933-11	ELECT 100μF 20%	16V
C4144	1-126-933-11	ELECT 100μF 20%	16V
C4171	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4172	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4305	1-163-038-91	CERAMIC CHIP 0.1μF 10%	25V
C4307	1-126-934-11	ELECT 220μF 20%	16V
C4308	1-126-933-11	ELECT 100μF 20%	16V
C4501	1-126-933-11	ELECT 100μF 20%	16V
C4502	1-163-038-91	CERAMIC CHIP 0.1μF 10%	25V
C4503	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4504	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4509	1-164-232-11	CERAMIC CHIP 0.01μF 10%	50V
C4510	1-128-551-11	ELECT 22μF 20%	25V
C4511	1-164-232-11	CERAMIC CHIP 0.01μF 10%	50V
C4512	1-124-903-11	ELECT 1μF 20%	50V
C4514	1-124-903-11	ELECT 1μF 20%	50V
C4516	1-124-903-11	ELECT 1μF 20%	50V
C4517	1-126-933-11	ELECT 100μF 20%	16V
C4518	1-164-232-11	CERAMIC CHIP 0.01μF 10%	50V
C4519	1-126-967-11	ELECT 47μF 20%	16V
C4520	1-164-232-11	CERAMIC CHIP 0.01μF 10%	50V
C4521	1-164-232-11	CERAMIC CHIP 0.01μF 10%	50V
C4522	1-128-551-11	ELECT 22μF 20%	25V
C4524	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4526	1-163-117-00	CERAMIC CHIP 100PF 5%	50V
C4527	1-163-117-00	CERAMIC CHIP 100PF 5%	50V
C4528	1-163-125-00	CERAMIC CHIP 220PF 5%	50V
C4529	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4530	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4531	1-164-004-11	CERAMIC CHIP 0.1μF 10%	25V
C4551	1-124-925-11	ELECT 2.2μF 20%	50V
C4552	1-163-105-00	CERAMIC CHIP 33PF 5%	50V
C4553	1-164-505-11	CERAMIC CHIP 2.2μF 16V	
C4554	1-126-964-11	ELECT 10μF 20%	50V
C4555	1-164-161-11	CERAMIC CHIP 0.0022μF 10%	50V
C4556	1-164-232-11	CERAMIC CHIP 0.01μF 10%	50V
C4558	1-126-933-11	ELECT 100μF 20%	16V
C4802	1-128-551-11	ELECT 22μF 20%	25V
<CONNECTOR>			
CN4005	1-774-137-11	SOCKET, CONNECTOR 36P	
CN4006	1-766-775-11	CONNECTOR, BOARD TO BOARD 32P	
CN4007	1-764-812-11	CONNECTOR, BOARD TO BOARD 11P	
CN4009	*1-564-506-11	PLUG, CONNECTOR 3P	
<DIODE>			
D2202	8-719-991-33	DIODE 1SS133T-77	
D4551	8-719-991-33	DIODE 1SS133T-77	
D4552	8-719-991-33	DIODE 1SS133T-77	
D4553	8-719-991-33	DIODE 1SS133T-77	
D4557	8-719-991-33	DIODE 1SS133T-77	
D4558	8-719-991-33	DIODE 1SS133T-77	
<FERRITE BEAD>			
FB2201	1-412-911-11	INDUCTOR, FERRITE BEAD	
FB2202	1-412-911-11	INDUCTOR, FERRITE BEAD	
FB2204	1-414-234-11	INDUCTOR, FERRITE BEAD	
<FILTER>			
FL2001	1-239-847-11	FILTER, LOW PASS	

REF. NO.	PART NO.	DESCRIPTION	REMARK
FL2003	1-239-847-11	FILTER, LOW PASS	
FL2004	1-239-847-11	FILTER, LOW PASS	
FL2008	1-236-101-11	ENCAPSULATED COMPONENT	
FL2009	1-236-101-11	ENCAPSULATED COMPONENT	
FL2010	1-236-101-11	ENCAPSULATED COMPONENT	
<IC>			
IC2001	8-759-161-24	IC μPC659AGS-E2	
IC2002	8-759-296-53	IC μPC1862GS-E2	
IC2005	8-759-296-51	IC μPD6486GF-3BA	
IC2006	8-759-161-22	IC μPD42280GU-60-E2	
IC2007	8-759-297-80	IC MSM514222B-30GS-KR1	
IC2201	8-759-112-06	IC μPC78N05H	
IC4051	8-759-262-02	IC MC14577CP	
IC4081	8-759-262-02	IC MC14577CP	
IC4111	8-759-262-02	IC MC14577CP	
IC4141	8-759-262-02	IC MC14577CP	
IC4171	8-759-262-02	IC MC14577CP	
IC4301	8-759-100-96	IC μPC4558G2	
IC4525	8-759-011-65	IC MC74HC4053F	
IC4526	8-752-058-68	IC CXA1315M	
IC4527	8-759-711-32	IC NJM2245M	
IC4528	8-759-711-32	IC NJM2245M	
IC4529	8-759-711-32	IC NJM2245M	
<COIL>			
L2001	1-410-470-11	INDUCTOR 10μH	
L2002	1-410-459-11	INDUCTOR 1.2μH	
L2003	1-410-459-11	INDUCTOR 1.2μH	
L2004	1-410-459-11	INDUCTOR 1.2μH	
L2005	1-410-459-11	INDUCTOR 1.2μH	
L2006	1-410-459-11	INDUCTOR 1.2μH	
L2009	1-408-413-00	INDUCTOR 22μH	
L2010	1-408-413-00	INDUCTOR 22μH	
L2011	1-408-413-00	INDUCTOR 22μH	
L2013	1-410-459-11	INDUCTOR 1.2μH	
L2014	1-410-459-11	INDUCTOR 1.2μH	
L2201	1-410-470-11	INDUCTOR 10μH	
L4551	1-410-496-31	INDUCTOR 1.5mH	
<TRANSISTOR>			
Q2001	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2002	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2004	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2005	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2006	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2007	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2009	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2010	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2011	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2015	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2016	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2017	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2019	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2020	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2021	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2022	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2023	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2024	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2025	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2026	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2027	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q2028	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q4111	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q4112	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q4113	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q4114	8-729-422-27	TRANSISTOR 2SD601A-Q	

B

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
Q4403	8-729-216-22	TRANSISTOR 2SA1162-G		R2045	1-216-089-91	METAL GLAZE 47K	5% 1/10W
Q4404	8-729-216-22	TRANSISTOR 2SA1162-G		R2046	1-216-089-91	METAL GLAZE 47K	5% 1/10W
Q4541	8-729-422-27	TRANSISTOR 2SD601A-Q					
Q4542	8-729-422-27	TRANSISTOR 2SD601A-Q		R2047	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q4543	8-729-422-27	TRANSISTOR 2SD601A-Q		R2048	1-216-033-00	METAL GLAZE 220	5% 1/10W
Q4544	8-729-422-27	TRANSISTOR 2SD601A-Q		R2049	1-216-033-00	METAL GLAZE 220	5% 1/10W
Q4545	8-729-422-27	TRANSISTOR 2SD601A-Q		R2050	1-216-133-00	METAL GLAZE 3.3M	5% 1/10W
Q4546	8-729-422-27	TRANSISTOR 2SD601A-Q		R2051	1-216-295-91	CONDUCTOR, CHIP	
Q4550	8-729-422-27	TRANSISTOR 2SD601A-Q					
Q4551	8-729-216-22	TRANSISTOR 2SA1162-G		R2052	1-216-295-91	CONDUCTOR, CHIP	
Q4552	8-729-422-27	TRANSISTOR 2SD601A-Q		R2055	1-216-295-91	CONDUCTOR, CHIP	
Q4553	8-729-216-22	TRANSISTOR 2SA1162-G		R2061	1-216-097-91	METAL GLAZE 100K	5% 1/10W
Q4555	8-729-216-22	TRANSISTOR 2SA1162-G		R2062	1-216-059-00	METAL GLAZE 2.7K	5% 1/10W
Q4556	8-729-216-22	TRANSISTOR 2SA1162-G		R2066	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
Q4557	8-729-422-27	TRANSISTOR 2SD601A-Q					
Q4558	8-729-422-27	TRANSISTOR 2SD601A-Q		R2068	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
Q4559	8-729-422-27	TRANSISTOR 2SD601A-Q		R2073	1-216-035-00	METAL GLAZE 270	5% 1/10W
Q4560	8-729-422-27	TRANSISTOR 2SD601A-Q		R2076	1-208-775-11	METAL CHIP 510	0.50% 1/10W
Q4561	8-729-422-27	TRANSISTOR 2SD601A-Q		R2077	1-216-071-00	METAL GLAZE 8.2K	5% 1/10W
Q4562	8-729-422-27	TRANSISTOR 2SD601A-Q		R2082	1-216-627-11	METAL CHIP 100	0.50% 1/10W
Q4563	8-729-422-27	TRANSISTOR 2SD601A-Q					
Q4564	8-729-422-27	TRANSISTOR 2SD601A-Q		R2087	1-216-053-00	METAL GLAZE 1.5K	5% 1/10W
Q4565	8-729-422-27	TRANSISTOR 2SD601A-Q		R2089	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q4566	8-729-422-27	TRANSISTOR 2SD601A-Q		R2090	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q4567	8-729-422-27	TRANSISTOR 2SD601A-Q		R2091	1-216-029-00	METAL GLAZE 150	5% 1/10W
Q4568	8-729-422-27	TRANSISTOR 2SD601A-Q		R2092	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
Q4569	8-729-422-27	TRANSISTOR 2SD601A-Q					
Q4570	8-729-422-27	TRANSISTOR 2SD601A-Q		R2093	1-216-045-00	METAL GLAZE 680	5% 1/10W
Q4571	8-729-422-27	TRANSISTOR 2SD601A-Q		R2098	1-216-664-11	METAL CHIP 3.6K	0.50% 1/10W
Q4572	8-729-422-27	TRANSISTOR 2SD601A-Q		R2099	1-216-656-11	METAL CHIP 1.6K	0.50% 1/10W
Q4573	8-729-216-22	TRANSISTOR 2SA1162-G		R2100	1-216-650-11	METAL CHIP 910	0.50% 1/10W
Q4574	8-729-216-22	TRANSISTOR 2SA1162-G		R2102	1-216-041-00	METAL GLAZE 470	5% 1/10W
Q4575	8-729-216-22	TRANSISTOR 2SA1162-G					
<RESISTOR>				R2103	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R2001	1-216-295-91	CONDUCTOR, CHIP		R2104	1-216-001-00	METAL GLAZE 10	5% 1/10W
R2002	1-216-033-00	METAL GLAZE 220	5% 1/10W	R2105	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R2004	1-216-025-91	METAL GLAZE 100	5% 1/10W	R2106	1-216-295-91	CONDUCTOR, CHIP	
R2005	1-216-025-91	METAL GLAZE 100	5% 1/10W	R2107	1-216-025-91	METAL GLAZE 100	5% 1/10W
R2006	1-216-023-00	METAL GLAZE 82	5% 1/10W				
R2007	1-216-023-00	METAL GLAZE 82	5% 1/10W	R2108	1-216-634-11	METAL CHIP 200	0.50% 1/10W
R2008	1-216-023-00	METAL GLAZE 82	5% 1/10W	R2109	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R2009	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R2110	1-216-295-91	CONDUCTOR, CHIP	
R2010	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R2111	1-216-037-00	METAL GLAZE 330	5% 1/10W
R2011	1-216-001-00	METAL GLAZE 10	5% 1/10W	R2112	1-216-043-91	METAL GLAZE 560	5% 1/10W
R2012	1-216-049-91	METAL GLAZE 1K	5% 1/10W				
R2014	1-216-041-00	METAL GLAZE 470	5% 1/10W	R2113	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R2015	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R2114	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R2016	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R2115	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R2017	1-216-025-91	METAL GLAZE 100	5% 1/10W	R2116	1-216-295-91	CONDUCTOR, CHIP	
R2018	1-216-295-91	CONDUCTOR, CHIP		R2117	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R2019	1-216-081-00	METAL GLAZE 22K	5% 1/10W				
R2020	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R2119	1-216-041-00	METAL GLAZE 470	5% 1/10W
R2021	1-216-045-00	METAL GLAZE 680	5% 1/10W	R2120	1-216-037-00	METAL GLAZE 330	5% 1/10W
R2022	1-216 025 91	METAL GLAZE 100	5% 1/10W	R2121	1-216-041-00	METAL GLAZE 470	5% 1/10W
R2023	1-216-009-00	METAL GLAZE 22	5% 1/10W	R2123	1-208-774-11	METAL CHIP 470	0.50% 1/10W
R2024	1-216-037-00	METAL GLAZE 330	5% 1/10W	R2124	1-216-689-11	METAL GLAZE 39K	5% 1/10W
R2026	1-216-039-00	METAL GLAZE 390	5% 1/10W				
R2027	1-216-037-00	METAL GLAZE 330	5% 1/10W	R2125	1-216-001-00	METAL GLAZE 10	5% 1/10W
R2028	1-208-800-11	METAL CHIP 5.6K	0.50% 1/10W	R2126	1-216-295-91	CONDUCTOR, CHIP	
R2030	1-216-063-91	METAL GLAZE 3.9K	5% 1/10W	R2127	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R2032	1-216-043-91	METAL GLAZE 560	5% 1/10W	R2128	1-216-043-91	METAL GLAZE 560	5% 1/10W
R2033	1-216-001-00	METAL GLAZE 10	5% 1/10W	R2129	1-216-025-91	METAL GLAZE 100	5% 1/10W
R2036	1-216-039-00	METAL GLAZE 390	5% 1/10W				
R2037	1-216-039-00	METAL GLAZE 390	5% 1/10W	R2130	1-216-634-11	METAL CHIP 200	0.50% 1/10W
R2039	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R2131	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R2042	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R2132	1-216-295-91	CONDUCTOR, CHIP	
R2044	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R2133	1-216-637-11	METAL CHIP 270	0.50% 1/10W
				R2134	1 216 049 91	METAL GLAZE 1K	5% 1/10W
				R2135	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
				R2136	1-216-073-00	METAL GLAZE 10K	5% 1/10W
				R2138	1-216-041-00	METAL GLAZE 470	5% 1/10W
				R2139	1-216-049-91	METAL GLAZE 1K	5% 1/10W
				R2141	1-216-041-00	METAL GLAZE 470	5% 1/10W
				R2146	1-216-017-91	METAL GLAZE 47	5% 1/10W
				R2147	1-216-017-91	METAL GLAZE 47	5% 1/10W
				R2149	1-216-017-91	METAL GLAZE 47	5% 1/10W
				R2150	1-216-017-91	METAL GLAZE 47	5% 1/10W
				R2152	1-216-017-91	METAL GLAZE 47	5% 1/10W
				R2153	1-216-295-91	CONDUCTOR, CHIP	

B

REF. NO.	PART NO.	DESCRIPTION	REMARK
R2154	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R2155	1-216-063-91	METAL GLAZE 3.9K	5% 1/10W
R2156	1-216-105-91	METAL GLAZE 220K	5% 1/10W
R2157	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R2201	1-216-295-91	CONDUCTOR, CHIP	
R2203	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R2204	1-216-295-91	CONDUCTOR, CHIP	
R2205	1-216-025-91	METAL GLAZE 100	5% 1/10W
R2206	1-216-025-91	METAL GLAZE 100	5% 1/10W
R2207	1-216-069-00	METAL GLAZE 6.8K	5% 1/10W
R2212	1-216-295-91	CONDUCTOR, CHIP	
R2216	1-216-295-91	CONDUCTOR, CHIP	
R4052	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4053	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4054	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4055	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4056	1-216-023-00	METAL GLAZE 82	5% 1/10W
R4057	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4058	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4059	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4060	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4061	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4062	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4063	1-216-045-00	METAL GLAZE 680	5% 1/10W
R4064	1-216-045-00	METAL GLAZE 680	5% 1/10W
R4077	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4082	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4083	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4084	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4087	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4088	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4089	1-216-023-00	METAL GLAZE 82	5% 1/10W
R4090	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4092	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4093	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4094	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4095	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4096	1-216-023-00	METAL GLAZE 82	5% 1/10W
R4111	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4112	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4114	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4115	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4116	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R4117	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R4118	1-216-295-91	CONDUCTOR, CHIP	
R4119	1-216-029-00	METAL GLAZE 150	5% 1/10W
R4120	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R4122	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4123	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4124	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4125	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4126	1-216-029-00	METAL GLAZE 150	5% 1/10W
R4127	1-216-295-91	CONDUCTOR, CHIP	
R4128	1-216-041-00	METAL GLAZE 470	5% 1/10W
R4130	1-216-041-00	METAL GLAZE 470	5% 1/10W
R4131	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R4132	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R4133	1-216-041-00	METAL GLAZE 470	5% 1/10W
R4135	1-216-041-00	METAL GLAZE 470	5% 1/10W
R4136	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R4137	1-216-295-91	CONDUCTOR, CHIP	
R4138	1-216-295-91	CONDUCTOR, CHIP	
R4141	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4143	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4144	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4145	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4146	1-216-295-91	CONDUCTOR, CHIP	
R4147	1-216-029-00	METAL GLAZE 150	5% 1/10W
R4149	1-216-049-91	METAL GLAZE 1K	5% 1/10W

REF. NO.	PART NO.	DESCRIPTION	REMARK
R4150	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4151	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4152	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4153	1-216-295-91	CONDUCTOR, CHIP	
R4154	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4155	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4157	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4158	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4159	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4160	1-216-295-91	CONDUCTOR, CHIP	
R4161	1-216-029-00	METAL GLAZE 150	5% 1/10W
R4163	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4164	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4165	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4166	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R4167	1-216-029-00	METAL GLAZE 150	5% 1/10W
R4168	1-216-295-91	CONDUCTOR, CHIP	
R4301	1-216-025-91	METAL GLAZE 100	5% 1/10W
R4302	1-216-676-11	METAL CHIP 11K	0.50% 1/10W
R4303	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R4304	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R4305	1-216-025-91	METAL GLAZE 100	5% 1/10W
R4306	1-216-025-91	METAL GLAZE 100	5% 1/10W
R4307	1-216-025-91	METAL GLAZE 100	5% 1/10W
R4308	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R4309	1-216-676-11	METAL CHIP 11K	0.50% 1/10W
R4310	1-216-676-11	METAL CHIP 11K	0.50% 1/10W
R4311	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R4312	1-216-295-91	CONDUCTOR, CHIP	
R4313	1-216-295-91	CONDUCTOR, CHIP	
R4314	1-216-295-91	CONDUCTOR, CHIP	
R4315	1-216-295-91	CONDUCTOR, CHIP	
R4316	1-216-295-91	CONDUCTOR, CHIP	
R4317	1-216-295-91	CONDUCTOR, CHIP	
R4318	1-216-295-91	CONDUCTOR, CHIP	
R4319	1-216-295-91	CONDUCTOR, CHIP	
R4328	1-216-295-91	CONDUCTOR, CHIP	
R4333	1-216-295-91	CONDUCTOR, CHIP	
R4337	1-216-295-91	CONDUCTOR, CHIP	
R4343	1-216-295-91	CONDUCTOR, CHIP	
R4347	1-216-097-91	METAL GLAZE 100K	5% 1/10W
R4348	1-216-097-91	METAL GLAZE 100K	5% 1/10W
R4349	1-216-097-91	METAL GLAZE 100K	5% 1/10W
R4350	1-216-097-91	METAL GLAZE 100K	5% 1/10W
R4355	1-216-676-11	METAL CHIP 11K	0.50% 1/10W
R4371	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4372	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4373	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4374	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4375	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4376	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4377	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4378	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4379	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4380	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4381	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4382	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4383	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4384	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4385	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4386	1-216-021-00	METAL GLAZE 68	5% 1/10W
R4401	1-216-025-91	METAL GLAZE 100	5% 1/10W
R4402	1-216-053-00	METAL GLAZE 1.5K	5% 1/10W
R4403	1-216-025-91	METAL GLAZE 100	5% 1/10W
R4404	1-216-025-91	METAL GLAZE 100	5% 1/10W
R4405	1-216-053-00	METAL GLAZE 1.5K	5% 1/10W
R4406	1-216-025-91	METAL GLAZE 100	5% 1/10W
R4407	1-216-295-91	CONDUCTOR, CHIP	

The components identified by shading and mark Δ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

B **F**

REF. NO.	PART NO.	DESCRIPTION	REMARK		REF. NO.	PART NO.	DESCRIPTION	REMARK	
R4410	1-216-295-91	CONDUCTOR, CHIP			R4575	1-216-079-00	METAL GLAZE 18K	5%	1/10W
R4412	1-216-295-91	CONDUCTOR, CHIP			R4576	1-216-081-00	METAL GLAZE 22K	5%	1/10W
R4413	1-216-295-91	CONDUCTOR, CHIP			R4577	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R4501	1-216-025-91	METAL GLAZE 100	5%	1/10W	R4578	1-216-105-91	METAL GLAZE 220K	5%	1/10W
R4503	1-216-295-91	CONDUCTOR, CHIP			R4579	1-216-089-91	METAL GLAZE 47K	5%	1/10W
R4504	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	R4580	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W
R4506	1-216-295-91	CONDUCTOR, CHIP			R4581	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R4507	1-216-295-91	CONDUCTOR, CHIP			R4582	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R4508	1-216-295-91	CONDUCTOR, CHIP			R4583	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R4509	1-216-295-91	CONDUCTOR, CHIP			R4584	1-216-081-00	METAL GLAZE 22K	5%	1/10W
R4511	1-216-025-91	METAL GLAZE 100	5%	1/10W	R4585	1-216-077-00	METAL GLAZE 15K	5%	1/10W
R4513	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	R4586	1-216-089-91	METAL GLAZE 47K	5%	1/10W
R4514	1-216-025-91	METAL GLAZE 100	5%	1/10W	R4587	1-216-077-00	METAL GLAZE 15K	5%	1/10W
R4515	1-216-295-91	CONDUCTOR, CHIP			R4588	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R4516	1-216-295-91	CONDUCTOR, CHIP			R4589	1-216-667-11	METAL CHIP 4.7K	0.50%	1/10W
R4517	1-216-295-91	CONDUCTOR, CHIP			R4590	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R4518	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	R4591	1-216-081-00	METAL GLAZE 22K	5%	1/10W
R4519	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R4592	1-216-081-00	METAL GLAZE 22K	5%	1/10W
R4521	1-216-025-91	METAL GLAZE 100	5%	1/10W	R4594	1-216-295-91	CONDUCTOR, CHIP		
R4522	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R4595	1-216-295-91	CONDUCTOR, CHIP		
R4523	1-216-295-91	CONDUCTOR, CHIP			R4596	1-216-295-91	CONDUCTOR, CHIP		
R4524	1-216-295-91	CONDUCTOR, CHIP			R4597	1-216-033-00	METAL GLAZE 220	5%	1/10W
R4525	1-216-295-91	CONDUCTOR, CHIP			R4598	1-216-033-00	METAL GLAZE 220	5%	1/10W
R4526	1-216-295-91	CONDUCTOR, CHIP			R4603	1-216-295-91	CONDUCTOR, CHIP		
R4527	1-216-295-91	CONDUCTOR, CHIP			R4604	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R4528	1-216-295-91	CONDUCTOR, CHIP			R4605	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R4530	1-216-295-91	CONDUCTOR, CHIP			R4606	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R4531	1-216-295-91	CONDUCTOR, CHIP			R4607	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R4532	1-216-295-91	CONDUCTOR, CHIP			R4610	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W
R4533	1-216-295-91	CONDUCTOR, CHIP			R4611	1-216-295-91	CONDUCTOR, CHIP		
R4534	1-216-049-91	METAL GLAZE 1K	5%	1/10W	<CRYSTAL>				
R4535	1-216-025-91	METAL GLAZE 100	5%	1/10W	X2001	1-579-583-11	VIBRATOR, CERAMIC		
R4536	1-216-049-91	METAL GLAZE 1K	5%	1/10W	X2002	1-579-967-21	VIBRATOR, CRYSTAL		
R4537	1-216-049-91	METAL GLAZE 1K	5%	1/10W	*****				
R4538	1-216-073-00	METAL GLAZE 10K	5%	1/10W	* A-1245-579-A F BOARD, COMPLETE				
R4539	1-216-073-00	METAL GLAZE 10K	5%	1/10W	*****				
R4540	1-216-073-00	METAL GLAZE 10K	5%	1/10W	* 4-049-866-01 CASE, SHIELD, TRANSFORMER FOAM				
R4541	1-216-051-00	METAL GLAZE 1.2K	5%	1/10W	4-382-854-11 SCREW (M3X10), P, SW (+)				
R4542	1-216-049-91	METAL GLAZE 1K	5%	1/10W	<CAPACITOR>				
R4543	1-216-051-00	METAL GLAZE 1.2K	5%	1/10W	C5601	1-136-311-11	FILM	0.47µF	20% 125V
R4544	1-216-049-91	METAL GLAZE 1K	5%	1/10W	C5602	1-136-345-21	FILM	0.1µF	20% 125V
R4545	1-216-051-00	METAL GLAZE 1.2K	5%	1/10W	C5605	1-162-168-00	CERAMIC	0.0033µF	20% 400V
R4546	1-216-049-91	METAL GLAZE 1K	5%	1/10W	C5606	1-113-610-11	ELECT	220µF	20% 250V
R4547	1-216-081-00	METAL GLAZE 22K	5%	1/10W	C5607	1-136-189-00	FILM	0.1µF	10% 250V
R4548	1-216-081-00	METAL GLAZE 22K	5%	1/10W	C5608	1-164-644-11	CERAMIC	330PF	10% 500V
R4549	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C5609	1-164-644-11	CERAMIC	330PF	10% 500V
R4550	1-216-025-91	METAL GLAZE 100	5%	1/10W	C5610	1-136-495-11	FILM	0.068µF	5% 50V
R4551	1-216-025-91	METAL GLAZE 100	5%	1/10W	C5611	1-107-824-11	CERAMIC	220PF	5% 1KV
R4553	1-216-045-00	METAL GLAZE 680	5%	1/10W	C5612	1-136-495-11	FILM	0.068µF	5% 50V
R4554	1-216-035-00	METAL GLAZE 270	5%	1/10W	C5613	1-136-159-00	FILM	0.033µF	5% 50V
R4555	1-216-081-00	METAL GLAZE 22K	5%	1/10W	C5614	1-136-159-00	FILM	0.033µF	5% 50V
R4556	1-216-041-00	METAL GLAZE 470	5%	1/10W	C5615	1-136-601-11	FILM	0.01µF	5% 630V
R4557	1-216-083-00	METAL GLAZE 27K	5%	1/10W	C5620	1-126-964-11	ELECT	10µF	20% 50V
R4559	1-216-043-91	METAL GLAZE 560	5%	1/10W	C5621	1-126-942-61	ELECT	1000µF	20% 25V
R4560	1-216-025-91	METAL GLAZE 100	5%	1/10W	C5622	1-126-964-11	ELECT	10µF	20% 50V
R4561	1-216-039-00	METAL GLAZE 390	5%	1/10W	C5623	1-126-952-11	ELECT	1000µF	20% 16V
R4562	1-216-295-91	CONDUCTOR, CHIP			C5624	1-126-934-11	ELECT	220µF	20% 16V
R4563	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C5625	1-163-036-00	CERAMIC CHIP	0.068µF	50V
R4564	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	C5626	1-163-036-00	CERAMIC CHIP	0.068µF	50V
R4565	1-216-295-91	CONDUCTOR, CHIP			C5627	1-126-964-11	ELECT	10µF	20% 50V
R4566	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	C5629	1-126-964-11	ELECT	10µF	20% 50V
R4567	1-216-033-00	METAL GLAZE 220	5%	1/10W					
R4569	1-216-121-91	METAL GLAZE 1M	5%	1/10W					
R4570	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W					
R4571	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W					
R4572	1-216-025-91	METAL GLAZE 100	5%	1/10W					
R4573	1-216-043-91	METAL GLAZE 560	5%	1/10W					
R4574	1-216-037-00	METAL GLAZE 330	5%	1/10W					



Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK
C5630	1-126-967-11	ELECT 47 μ F 20% 16V	
C5631	1-126-964-11	ELECT 10 μ F 20% 50V	
C5632	1-126-964-11	ELECT 10 μ F 20% 50V	
C5634	1-104-666-11	ELECT 220 μ F 20% 25V	
C5635	1-126-964-11	ELECT 10 μ F 20% 50V	
C5639	1-104-664-11	ELECT 47 μ F 20% 25V	
C5642	1-126-964-11	ELECT 10 μ F 20% 50V	
C5645	1-126-964-11	ELECT 10 μ F 20% 50V	
C5646	1-126-964-11	ELECT 10 μ F 20% 50V	
C5647	1-126-964-11	ELECT 10 μ F 20% 50V	

<CONNECTOR>

CN5601	* 1-580-843-11	PIN, CONNECTOR (POWER)
CN5602	Δ 1-540-057-11	OUTLET, AC (POLAR)
CN5603	* 1-564-514-11	PLUG, CONNECTOR 11P
CN5604	* 1-564-509-11	PLUG, CONNECTOR 6P

<DIODE>

D5601	8-719-510-43	DIODE S1WB60B
D5602	8-719-911-19	DIODE ISS119-25
D5603	8-719-911-19	DIODE ISS119-25
D5604	8-719-911-19	DIODE ISS119-25
D5605	8-719-911-19	DIODE ISS119-25
D5620	8-719-510-02	DIODE D1NS4
D5621	8-719-031-79	DIODE D5SC4M
D5622	8-719-031-79	DIODE D5SC4M
D5623	8-719-510-02	DIODE D1NS4
D5624	8-719-991-33	DIODE ISS133T-77
D5625	8-719-510-02	DIODE D1NS4
D5626	8-719-510-02	DIODE D1NS4
D5627	8-719-510-02	DIODE D1NS4
D5628	8-719-110-78	DIODE RD33ESB2
D5629	8-719-110-57	DIODE RD22ESB2
D5630	8-719-991-33	DIODE ISS133T-77
D5631	8-719-991-33	DIODE ISS133T-77

<FUSE>

F5601	Δ 1-576-104-21	FUSE (2A/250V)
	1-533-223-11	HOLDER, FUSE; F5601
F5602	Δ 1-576-193-11	FUSE (6.3A/125V)
	1-533-223-11	HOLDER, FUSE; F5602

<IC>

IC5622	8-759-231-58	IC TA7812S
IC5623	8-759-701-59	IC NJM78M09FA
IC5631	8-759-140-85	IC μ PC1093J
IC5634	8-759-701-59	IC NJM78M09FA

<COIL>

L5621	1-403-588-11	CIL, CHOKE 22 μ H
L5622	1-403-588-11	CIL, CHOKE 22 μ H
L5623	1-403-588-11	CIL, CHOKE 22 μ H
L5633	1-403-588-11	CIL, CHOKE 22 μ H

<TRANSISTOR>

Q5601	8-729-025-77	TRANSISTOR 2SC4663NPR-F
Q5602	8-729-025-77	TRANSISTOR 2SC4663NPR-F
Q5621	8-729-140-98	TRANSISTOR 2SD773-34
Q5622	8-729-927-85	TRANSISTOR 2SB1496EF
Q5623	8-729-140-98	TRANSISTOR 2SD773-34
Q5624	8-729-422-27	TRANSISTOR 2SD601A-Q
Q5625	8-729-216-22	TRANSISTOR 2SA1162-G
Q5626	8-729-216-22	TRANSISTOR 2SA1162-G

REF. NO.	PART NO.	DESCRIPTION	REMARK
<RESISTOR>			
R5601	1-249-377-11	CARBON 0.47 5% 1/4W	F
R5602	1-249-377-11	CARBON 0.47 5% 1/4W	F
R5603	1-247-895-91	CARBON 470K 5% 1/4W	
R5604	1-249-392-11	CARBON 8.2 5% 1/4W	
R5605	1-247-895-91	CARBON 470K 5% 1/4W	
R5606	1-249-392-11	CARBON 8.2 5% 1/4W	
R5608	1-249-403-11	CARBON 68 5% 1/4W	
R5609	1-249-403-11	CARBON 68 5% 1/4W	
R5610	Δ 1-219-512-91	RESISTOR(SURGE RESISTANT) 2.2M	
R5620	1-216-049-91	METAL GLAZE 1K 5% 1/10W	
R5621	1-216-097-91	METAL GLAZE 100K 5% 1/10W	
R5622	1-216-657-11	METAL CHIP 1.8K 0.50% 1/10W	
R5623	1-216-656-11	METAL CHIP 1.6K 0.50% 1/10W	
R5624	1-216-049-91	METAL GLAZE 1K 5% 1/10W	
R5625	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5626	1-249-377-11	CARBON 0.47 5% 1/4W	F
R5627	1-211-761-11	FUSIBLE 0.1 10% 1/2W	
R5628	1-249-377-11	CARBON 0.47 5% 1/4W	F
R5629	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5630	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5631	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5632	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5633	1-249-377-11	CARBON 0.47 5% 1/4W	F
R5634	1-249-415-11	CARBON 680 5% 1/4W	F
R5635	1-216-358-11	METAL OXIDE 5.6 5% 1W	F
R5636	1-216-375-00	METAL OXIDE 3.3 5% 2W	F
R5637	1-211-761-11	FUSIBLE 0.1 10% 1/2W	
R5638	1-260-288-11	CARBON 0.47 5% 1/2W	
R5639	1-249-377-11	CARBON 0.47 5% 1/4W	F
R5640	1-215-859-00	METAL OXIDE 22 5% 1W	F
R5641	1-215-862-11	METAL OXIDE 68 5% 1W	F
R5642	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5643	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5644	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5645	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W	
R5646	1-216-298-00	METAL GLAZE 2.2 5% 1/10W	
R5647	1-215-862-11	METAL OXIDE 68 5% 1W	F
R5648	1-215-869-11	METAL OXIDE 1K 5% 1W	F
R5649	1-216-373-11	METAL OXIDE 2.2 5% 2W	F
R5650	1-249-377-11	CARBON 0.47 5% 1/4W	F

<TRANSFORMER>

T5601	Δ 1-424-117-11	FILTER, LINE
T5603	Δ 1-429-200-11	TRANSFORMER, CONVERTER (PIT)
T5604	Δ 1-427-864-11	TRANSFORMER, CONVERTER (PRT)

* A-1275-129-A Q BOARD, COMPLETE

<CAPACITOR>

C6003	1-128-551-11	ELECT 22 μ F 20% 25V
C6004	1-128-551-11	ELECT 22 μ F 20% 25V
C6005	1-163-031-11	CERAMIC CHIP 0.01 μ F 50V
C6006	1-126-940-11	ELECT 330 μ F 20% 16V
C6007	1-163-095-00	CERAMIC CHIP 12PF 5% 50V
C6008	1-128-551-11	ELECT ?? μ F 20% 25V
C6009	1-128-551-11	ELECT 22 μ F 20% 25V
C6010	1-163-095-00	CERAMIC CHIP 12PF 5% 50V
C6011	1-126-940-11	ELECT 330 μ F 20% 16V
C6015	1-163-117-00	CERAMIC CHIP 100PF 5% 50V
C6016	1-163-117-00	CERAMIC CHIP 100PF 5% 50V

Q

REF. NO.	PART NO.	DESCRIPTION	REMARK
C6017	1-124-903-11	ELECT 1μF	20% 50V
C6018	1-124-903-11	ELECT 1μF	20% 50V
C6019	1-126-964-11	ELECT 10μF	20% 50V
C6020	1-126-964-11	ELECT 10μF	20% 50V
C6028	1-124-903-11	ELECT 1μF	20% 50V
C6029	1-124-903-11	ELECT 1μF	20% 50V
C6030	1-124-903-11	ELECT 1μF	20% 50V
C6031	1-163-031-11	CERAMIC CHIP 0.01μF	50V
C6032	1-128-551-11	ELECT 22μF	20% 25V
C6033	1-124-903-11	ELECT 1μF	20% 50V
C6036	1-163-031-11	CERAMIC CHIP 0.01μF	50V
C6037	1-128-551-11	ELECT 22μF	20% 25V
C6038	1-163-031-11	CERAMIC CHIP 0.01μF	50V
C6039	1-128-551-11	ELECT 22μF	20% 25V
C6040	1-128-551-11	ELECT 22μF	20% 25V
C6041	1-124-903-11	ELECT 1μF	20% 50V
C6042	1-128-551-11	ELECT 22μF	20% 25V
C6043	1-124-903-11	ELECT 1μF	20% 50V
C6044	1-128-551-11	ELECT 22μF	20% 25V
C6045	1-128-551-11	ELECT 22μF	20% 25V
C6046	1-128-551-11	ELECT 22μF	20% 25V
C6047	1-124-903-11	ELECT 1μF	20% 50V
C6048	1-124-903-11	ELECT 1μF	20% 50V
C6049	1-128-551-11	ELECT 22μF	20% 25V
C6050	1-163-031-11	CERAMIC CHIP 0.01μF	50V
C6051	1-128-551-11	ELECT 22μF	20% 25V
C6052	1-126-964-11	ELECT 10μF	20% 50V
C6053	1-126-964-11	ELECT 10μF	20% 50V
C6054	1-126-964-11	ELECT 470μF	20% 16V
C6055	1-163-031-11	CERAMIC CHIP 0.01μF	50V
C6056	1-163-031-11	CERAMIC CHIP 0.01μF	50V
C6060	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V

<CONNECTOR>

CN6001	1-750-452-11	CONNECTOR, FFC/FPC 11P
CN6002	1-750-452-11	CONNECTOR, FFC/FPC 11P
CN6003	1-564-523-11	PLUG, CONNECTOR 8P
CN6004	1-750-462-11	CONNECTOR, FFC/FPC 21P

<DIODE>

D6001	8-719-110-17	DIODE RD10ESB2
D6002	8-719-110-17	DIODE RD10ESB2
D6003	8-719-110-17	DIODE RD10ESB2
D6004	8-719-110-17	DIODE RD10ESB2
D6005	8-719-110-17	DIODE RD10ESB2
D6006	8-719-110-17	DIODE RD10ESB2
D6007	8-719-110-17	DIODE RD10ESB2
D6008	8-719-110-17	DIODE RD10ESB2
D6009	8-719-110-17	DIODE RD10ESB2
D6010	8-719-110-17	DIODE RD10ESB2
D6011	8-719-110-17	DIODE RD10ESB2
D6012	8-719-110-17	DIODE RD10ESB2
D6013	8-719-110-17	DIODE RD10ESB2
D6014	8-719-110-17	DIODE RD10ESB2
D6015	8-719-110-17	DIODE RD10ESB2
D6016	8-719-110-17	DIODE RD10ESB2
D6017	8-719-110-17	DIODE RD10ESB2
D6018	8-719-110-17	DIODE RD10ESB2
D6019	8-719-110-17	DIODE RD10ESB2
D6020	8-719-110-17	DIODE RD10ESB2
D6021	8-719-110-17	DIODE RD10ESB2
D6023	8-719-110-17	DIODE RD10ESB2
D6024	8-719-110-17	DIODE RD10ESB2
D6026	8-719-110-17	DIODE RD10ESB2
D6028	8-719-110-17	DIODE RD10ESB2
D6034	8-719-110-17	DIODE RD10ESB2
D6036	8-719-110-17	DIODE RD10ESB2

REF. NO.	PART NO.	DESCRIPTION	REMARK
D6037	8-719-110-17	DIODE RD10ESB2	
		<IC>	
IC6002	8-752-066-69	IC CXA1845Q	
		<JACK>	
J6001	1-573-969-11	JACK BLOCK, PIN	
J6002	1-573-969-11	JACK BLOCK, PIN	
J6003	1-573-971-11	JACK BLOCK, PIN	
J6006	1-573-967-11	BLOCK, (S) TERMINAL	
J6007	1-573-967-11	BLOCK, (S) TERMINAL	

<COIL>

L6001	1-408-422-00	INDUCTOR 120μH
L6002	1-408-422-00	INDUCTOR 120μH

<TRANSISTOR>

Q6001	8-729-216-22	TRANSISTOR 2SA1162-G
Q6002	8-729-216-22	TRANSISTOR 2SA1162-G
Q6003	8-729-216-22	TRANSISTOR 2SD601A-Q
Q6004	8-729-216-22	TRANSISTOR 2SA1162-G
Q6005	8-729-216-22	TRANSISTOR 2SA1162-G
Q6006	8-729-216-22	TRANSISTOR 2SA1162-G
Q6016	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6017	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6020	8-729-216-22	TRANSISTOR 2SA1162-G
Q6023	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6024	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6027	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6028	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6029	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6030	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6031	8-729-422-27	TRANSISTOR 2SD601A-Q
Q6032	8-729-422-27	TRANSISTOR 2SD601A-Q

<RESISTOR>

R6001	1-216-295-91	CONDUCTOR, CHIP		
R6002	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R6003	1-216-295-91	CONDUCTOR, CHIP		
R6004	1-216-295-91	CONDUCTOR, CHIP		
R6005	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R6009	1-216-041-00	METAL GLAZE 470	5%	1/10W
R6010	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6011	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6012	1-216-033-00	METAL GLAZE 220	5%	1/10W
R6013	1-216-033-00	METAL GLAZE 220	5%	1/10W
R6014	1-216-067-00	METAL GLAZE 5.6K	5%	1/10W
R6015	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6016	1-216-067-00	METAL GLAZE 5.6K	5%	1/10W
R6017	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6018	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6019	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6020	1-216-067-00	METAL GLAZE 5.6K	5%	1/10W
R6021	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6022	1-216-067-00	METAL GLAZE 5.6K	5%	1/10W
R6023	1-216-041-00	METAL GLAZE 470	5%	1/10W
R6024	1-216-041-00	METAL GLAZE 470	5%	1/10W
R6025	1-216-041-00	METAL GLAZE 470	5%	1/10W
R6026	1-216-041-00	METAL GLAZE 470	5%	1/10W
R6027	1-216-041-00	METAL GLAZE 470	5%	1/10W
R6029	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6030	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6031	1-216-025-91	METAL GLAZE 100	5%	1/10W
R6032	1-216-025-91	METAL GLAZE 100	5%	1/10W

Q

AA

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK
R6033	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6034	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6035	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6036	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6037	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6038	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6039	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6040	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6041	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6042	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6043	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6044	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6045	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6046	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R6047	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6048	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6049	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6050	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6051	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6052	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6053	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6054	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6055	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6056	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6058	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6059	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6060	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6061	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6062	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6063	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6064	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6065	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6066	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6067	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6068	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R6069	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6070	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R6071	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6072	1-216-295-91	CONDUCTOR, CHIP	
R6073	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6074	1-216-295-91	CONDUCTOR, CHIP	
R6075	1-216-295-91	CONDUCTOR, CHIP	
R6076	1-216-295-91	CONDUCTOR, CHIP	
R6077	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6079	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6097	1-216-041-00	METAL GLAZE 470	5% 1/10W
R6098	1-216-041-00	METAL GLAZE 470	5% 1/10W
R6099	1-216-041-00	METAL GLAZE 470	5% 1/10W
R6100	1-216-041-00	METAL GLAZE 470	5% 1/10W
R6113	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6116	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6117	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6119	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6123	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6126	1-216-041-00	METAL GLAZE 470	5% 1/10W
R6128	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6129	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6130	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6131	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6132	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6133	1-216-041-00	METAL GLAZE 470	5% 1/10W
R6134	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6135	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6141	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6142	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6145	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6146	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6147	1-216-022-00	METAL GLAZE 75	5% 1/10W

REF. NO.	PART NO.	DESCRIPTION	REMARK
R6148	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6149	1-216-041-00	METAL GLAZE 470	5% 1/10W
R6150	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6154	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6155	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6156	1-216-041-00	METAL GLAZE 470	5% 1/10W
R6157	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6158	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6159	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6160	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6163	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6164	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6165	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6166	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6167	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6168	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6169	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6170	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6171	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6172	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6173	1-216-022-00	METAL GLAZE 75	5% 1/10W
R6176	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6177	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6178	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6179	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6180	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6181	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6185	1-216-021-00	METAL GLAZE 68	5% 1/10W
R6186	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6187	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6188	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6189	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R6190	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6192	1-216-095-00	METAL GLAZE 82K	5% 1/10W
R6193	1-216-095-00	METAL GLAZE 82K	5% 1/10W
R6194	1-216-095-00	METAL GLAZE 82K	5% 1/10W
R6195	1-216-095-00	METAL GLAZE 82K	5% 1/10W
R6196	1-216-095-00	METAL GLAZE 82K	5% 1/10W

* A-1297-526-A AA BOARD, COMPLETE

1-923-137-27 WIRE UL1007 AWG26 50MM RED
4-382-854-11 SCREW (M3X10), P, SW (+)

<CAPACITOR>

C501	1-136-109-00	FILM	0.68 μ F	5%	200V
C502	1-130-471-00	FILM	0.001 μ F	5%	50V
C503	1-126-935-11	ELECT	470 μ F	20%	16V
C504	1-137-374-11	FILM	0.047 μ F	5%	50V
C505	1-124-902-00	ELECT	0.47 μ F	20%	50V
C506	1-126-934-11	ELECT	220 μ F	20%	16V
C507	1-137-366-11	FILM	0.0022 μ F	5%	50V
C508	1-162-114-00	CERAMIC	0.0047 μ F		2KV
C509	1-107-635-11	ELECT	4.7 μ F	20%	160V
C510	1-102-110-00	CERAMIC	220PF	10%	50V
C511	1-126-935-11	ELECT	470 μ F	20%	16V
C512	1-162-318-11	CERAMIC	0.001 μ F	10%	500V
C513	1-106-391-12	MYLAR	0.1 μ F	10%	200V
C514	1-106-391-12	MYLAR	0.1 μ F	10%	200V
C515	1-162-117-00	CERAMIC	100PF	10%	500V
C516	1-102-244-00	CERAMIC	220PF	10%	500V
C519	1-126-935-11	ELECT	470 μ F	20%	16V
C520	Δ 1-161-754-00	CERAMIC	0.001 μ F	10%	2KV
C521	Δ 1-137-604-11	FILM	0.022 μ F	2%	2KV
C522	1-162-116-00	CERAMIC	680PF	10%	2KV

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

AA

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
C523	1-136-173-00	FILM	0.47 μ F 5% 50V	C2422	1-137-399-11	FILM	0.1 μ F 5% 50V
C524	1-137-370-11	FILM	0.01 μ F 5% 50V	C2423	1-126-943-11	ELECT	2200 μ F 20% 25V
C525	1-162-116-00	CERAMIC	680PF 10% 2KV	C2424	1-137-399-11	FILM	0.1 μ F 5% 50V
C526	Δ 1-137-515-11	FILM	0.056 μ F 3% 400V	C2425	1-137-399-11	FILM	0.1 μ F 5% 50V
C528	1-106-359-00	MYLAR	0.0047 μ F 10% 200V	C2426	1-137-399-11	FILM	0.1 μ F 5% 50V
C530	1-136-105-00	FILM	0.33 μ F 5% 200V	<CONNECTOR>			
C531	1-107-650-11	ELECT	3.3 μ F 20% 250V	CN501	* 1-508-765-00	PIN, CONNECTOR (5mm PITCH) 3P	
C533	1-136-569-11	FILM	1.2 μ F 5% 200V	CN502	1-770-831-11	CONNECTOR, BOARD TO BOARD 6P	
C534	1-136-109-00	FILM	0.68 μ F 5% 200V	CN503	1-770-831-11	CONNECTOR, BOARD TO BOARD 6P	
C535	1-126-941-11	ELECT	470 μ F 20% 25V	CN504	* 1-691-915-11	CONNECTOR, BOARD TO BOARD 15P	
C536	1-102-228-00	CERAMIC	470PF 10% 500V	CN505	1-573-297-21	CONNECTOR, BOARD TO BOARD 18P	
C537	1-106-343-00	MYLAR	0.001 μ F 10% 100V	CN506	1-764-812-11	CONNECTOR, BOARD TO BOARD 11P	
C539	1-107-655-11	ELECT	47 μ F 20% 250V	CN507	* 1-691-915-11	CONNECTOR, BOARD TO BOARD 15P	
C540	1-126-941-11	ELECT	470 μ F 20% 25V	CN508	* 1-691-915-11	CONNECTOR, BOARD TO BOARD 15P	
C541	1-102-228-00	CERAMIC	470PF 10% 500V	CN509	* 1-508-766-00	PIN, CONNECTOR (5mm PITCH) 4P	
C542	1-106-391-12	MYLAR	0.1 μ F 10% 200V	CN510	* 1-508-767-00	PIN, CONNECTOR (5mm PITCH) 5P	
C543	1-129-898-00	FILM	0.0022 μ F 5% 630V	CN511	* 1-564-509-11	PLUG, CONNECTOR 6P	
C544	Δ 1-109-954-11	ELECT	0.47 μ F 20% 160V	CN512	* 1-564-508-11	PLUG, CONNECTOR 5P	
C545	1-102-244-00	CERAMIC	220PF 10% 500V	CN513	* 1-564-507-11	PLUG, CONNECTOR 4P	
C546	1-123-024-21	ELECT	33 μ F 10% 160V	CN514	* 1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P	
C549	1-124-903-11	ELECT	1 μ F 20% 50V	CN515	* 1-580-798-11	CONNECTOR PIN (DY) 6P	
C550	1-129-702-00	FILM	0.001 μ F 10% 630V	CN516	* 1-564-508-11	PLUG, CONNECTOR 5P	
C551	1-137-364-11	FILM	0.001 μ F 5% 50V	<DIODE>			
C552	1-126-923-11	ELECT	220 μ F 20% 10V	D501	8-719-018-82	DIODE RGP02-20EL-6394	
C554	1-161-754-00	CERAMIC	0.001 μ F 10% 2KV	D502	8-719-302-43	DIODE EL1Z	
C557	1-124-902-00	ELECT	0.47 μ F 20% 50V	D503	8-719-970-87	DIODE ERA38-06	
C559	1-129-718-00	FILM	0.022 μ F 5% 630V	D504	8-719-991-33	DIODE 1SS133T-77	
C561	1-124-927-11	ELECT	4.7 μ F 20% 50V	D505	8-719-991-33	DIODE 1SS133T-77	
C566	1-106-343-00	MYLAR	0.001 μ F 10% 100V	D506	8-719-991-33	DIODE 1SS133T-77	
C567	1-104-665-11	ELECT	100 μ F 20% 25V	D508	8-719-109-88	DIODE RD5.6ESB1	
C569	1-136-167-00	FILM	0.15 μ F 5% 50V	D509	8-719-110-03	DIODE RD7.5ESB2	
C570	1-137-364-11	FILM	0.001 μ F 5% 50V	D513	8-719-970-87	DIODE ERA38-06	
C571	1-130-471-00	FILM	0.001 μ F 5% 50V	D514	8-719-979-85	DIODE EGP20G	
C572	1-126-964-11	ELECT	10 μ F 20% 50V	D515	8-719-302-43	DIODE EL1Z	
C573	1-137-364-11	FILM	0.001 μ F 5% 50V	D516	8-719-979-85	DIODE EGP20G	
C574	1-161-754-00	CERAMIC	0.001 μ F 10% 2KV	D517	8-719-300-33	DIODE RU-3AM	
C575	1-102-038-00	CERAMIC	0.001 μ F 500V	D518	8-719-109-93	DIODE RD6.2ESB2	
C576	1-106-351-00	MYLAR	0.0022 μ F 200V	D520	8-719-991-33	DIODE 1SS133T-77	
C1502	1-136-177-00	FILM	1 μ F 5% 50V	D521	8-719-991-33	DIODE 1SS133T-77	
C1503	1-102-114-00	CERAMIC	470PF 10% 50V	D522	8-719-110-72	DIODE RD30ESB2	
C1504	1-126-941-11	ELECT	470 μ F 20% 25V	D524	8-719-028-72	DIODE RGP02-17EL-6433	
C1505	1-126-969-11	ELECT	220 μ F 20% 50V	D525	8-719-991-33	DIODE 1SS133T-77	
C1506	1-136-171-00	FILM	0.33 μ F 5% 50V	D527	8-719-110-78	DIODE RD33ESB2	
C1508	1-126-941-11	ELECT	470 μ F 20% 25V	D529	8-719-991-33	DIODE 1SS133T-77	
C1509	1-124-122-11	ELECT	100 μ F 20% 50V	D530	8-719-991-33	DIODE 1SS133T-77	
C1511	1-102-942-00	CERAMIC	5PF 0.5PF 50V	D532	8-719-908-03	DIODE GP08D	
C1514	1-124-903-11	ELECT	1 μ F 20% 50V	D533	8-719-908-03	DIODE GP08D	
C1515	1-137-372-11	FILM	0.022 μ F 5% 50V	D1503	8-719-908-03	DIODE GP08D	
C2401	1-126-964-11	ELECT	10 μ F 20% 50V	D2401	8-719-991-33	DIODE 1SS133T-77	
C2402	1-126-964-11	ELECT	10 μ F 20% 50V	D2402	8-719-991-33	DIODE 1SS133T-77	
C2403	1-126-967-11	ELECT	47 μ F 20% 16V	D2404	8-719-991-33	DIODE 1SS133T-77	
C2404	1-126-967-11	ELECT	47 μ F 20% 16V	<FERRITE BEAD>			
C2405	1-124-903-11	ELECT	1 μ F 20% 50V	FB501	1-412-911-11	INDUCTOR, FERRITE BEAD	
C2407	1-124-903-11	ELECT	1 μ F 20% 50V	<IC>			
C2408	1-126-943-11	ELECT	2200 μ F 20% 25V	IC501	8-759-103-93	IC μ PC393C	
C2409	1-137-399-11	FILM	0.1 μ F 5% 50V	IC502	1-809-845-11	MODULE, PROTECTOR PM-30	
C2410	1-126-943-11	ELECT	2200 μ F 20% 25V	IC503	8-759-103-93	IC μ PC393C	
C2411	1-137-399-11	FILM	0.1 μ F 5% 50V	IC1501	8-759-192-71	IC STV9379	
C2412	1-137-399-11	FILM	0.1 μ F 5% 50V	IC2401	8-759-190-89	IC TDA7265	
C2413	1-137-399-11	FILM	0.1 μ F 5% 50V	IC2402	8-759-190-89	IC TDA7265	
C2414	1-126-964-11	ELECT	10 μ F 20% 50V				
C2415	1-126-964-11	ELECT	10 μ F 20% 50V				
C2416	1-126-967-11	ELECT	47 μ F 20% 16V				
C2417	1-126-967-11	ELECT	47 μ F 20% 16V				
C2418	1-124-903-11	ELECT	1 μ F 20% 50V				
C2419	1-124-903-11	ELECT	1 μ F 20% 50V				
C2420	1-104-665-11	ELECT	100 μ F 20% 25V				
C2421	1-126-943-11	ELECT	2200 μ F 20% 25V				

AA

• The components identified by  in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

Les composants identifiés par une trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifique.

The components identified by shading and mark  are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
<COIL>				R526	1-249-401-11	CARBON 47	5% 1/4W
L501	1-406-677-11	COIL, CHOKE 10mH		R527	1-215-889-00	METAL OXIDE 330	5% 2W F
L502	1-412-552-11	INDUCTOR 2.2mH		R528	1-216-121-91	METAL GLAZE 1M	5% 1/10W
L504	1-410-087-31	INDUCTOR 10mH		R529	1-249-429-11	CARBON 10K	5% 1/4W
L507	1-406-664-21	COIL, CHOKE 68μH		R530	1-216-687-11	METAL CHIP 33K	0.50% 1/10W
L508	1-412-549-11	INDUCTOR 1mH		R531	1-249-432-11	CARBON 18K	5% 1/4W
L509	1-459-104-00	COIL, WITH CORE		R532	1-216-089-91	METAL GLAZE 47K	5% 1/10W
L510	 1-460-197-11	COIL, FERRITE (PMC)		R533	1-247-887-00	CARBON 220K	5% 1/4W
L511	1-412-519-11	INDUCTOR 3.3μH		R534	1-216-109-00	METAL GLAZE 330K	5% 1/10W
L512	1-412-531-31	INDUCTOR 33μH		R535	1-216-089-91	METAL GLAZE 47K	5% 1/10W
L513	1-412-519-11	INDUCTOR 3.3μH		R536	1-215-887-00	METAL OXIDE 150	5% 2W F
L514	1-412-551-21	INDUCTOR 1.5mH		R537	1-216-695-11	METAL CHIP 68K	0.50% 1/10W
L520	1-412-531-31	INDUCTOR 33μH		R538	1-216-113-00	METAL GLAZE 470K	5% 1/10W
L1502	1-412-525-31	INDUCTOR 10μH		R539	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
<TRANSISTOR>				R540	1-215-909-11	METAL OXIDE 47	5% 3W F
Q501	8-729-021-48	TRANSISTOR 2SD2348LBSony		R541	1-249-397-11	CARBON 22	5% 1/4W F
Q502	8-729-140-93	TRANSISTOR 2SB733-34		R542	1-260-329-51	CARBON 1.2K	5% 1/2W
Q503	8-729-011-06	TRANSISTOR 2SC3840K		R543	1-249-389-11	CARBON 4.7	5% 1/4W F
Q504	8-729-216-22	TRANSISTOR 2SA1162-G		R544	1-216-455-11	METAL OXIDE 560	5% 2W F
Q506	8-729-019-71	TRANSISTOR 2SK1916-53-F50		R546	1-215-441-00	METAL 6.8K	1% 1/4W
Q507	8-729-119-80	TRANSISTOR 2SC2688-LK		R547	1-216-097-91	METAL GLAZE 100K	5% 1/10W
Q509	8-729-216-22	TRANSISTOR 2SA1162-G		R549	1-215-881-11	METAL OXIDE 15	5% 2W F
Q510	8-729-422-27	TRANSISTOR 2SD601A-Q		R551	1-260-320-11	CARBON 220	5% 1/2W
Q512	8-729-422-27	TRANSISTOR 2SD601A-Q		R553	1-249-377-11	CARBON 0.47	5% 1/4W F
Q513	8-729-140-96	TRANSISTOR 2SD774-34		R554	1-249-377-11	CARBON 0.47	5% 1/4W F
Q515	8-729-216-22	TRANSISTOR 2SA1162-G		R555	1-260-107-11	CARBON 4.7K	5% 1/2W
Q516	8-729-216-22	TRANSISTOR 2SA1162-G		R556	1-216-459-00	METAL OXIDE 2.7K	5% 2W F
Q1502	8-729-422-27	TRANSISTOR 2SD601A-Q		R558	1-259-882-11	CARBON 3.3M	5% 1/4W
Q2401	8-729-422-27	TRANSISTOR 2SD601A-Q		R559	1-216-439-00	METAL OXIDE 12K	5% 1W F
Q2402	8-729-422-27	TRANSISTOR 2SD601A-Q		R560	1-247-901-11	CARBON 820K	5% 1/4W
Q2403	8-729-422-27	TRANSISTOR 2SD601A-Q		R564	1-218-756-11	METAL CHIP 150K	0.50% 1/10W
Q2404	8-729-422-27	TRANSISTOR 2SD601A-Q		 R565	 METAL GLAZE		1/10W
Q2405	8-729-422-27	TRANSISTOR 2SD601A-Q		 R566	 METAL GLAZE		1/10W
Q2406	8-729-422-27	TRANSISTOR 2SD601A-Q		R567	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
Q2407	8-729-422-27	TRANSISTOR 2SD601A-Q		R568	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
Q2408	8-729-422-27	TRANSISTOR 2SD601A-Q		R569	1-249-417-11	CARBON 1K	5% 1/4W
Q2409	8-729-422-27	TRANSISTOR 2SD601A-Q		R572	1-249-393-11	CARBON 10	5% 1/4W F
Q2410	8-729-216-22	TRANSISTOR 2SA1162-G		R573	1-249-393-11	CARBON 10	5% 1/4W F
Q2411	8-729-422-27	TRANSISTOR 2SD601A-Q		R574	1-215-882-00	METAL OXIDE 22	5% 2W F
<RESISTOR>				R575	1-216-459-00	METAL OXIDE 2.7K	5% 2W F
R501	1-216-077-00	METAL GLAZE 15K	5% 1/10W	R576	1-249-417-11	CARBON 1K	5% 1/4W F
R503	1-249-409-11	CARBON 220	5% 1/4W F	R579	1-249-441-11	CARBON 100K	5% 1/4W
R504	1-215-869-11	METAL OXIDE 1K	5% 1W	R580	1-249-441-11	CARBON 100K	5% 1/4W
R505	1-208-810-11	METAL CHIP 15K	0.50% 1/10W	R583	1-208-824-11	METAL CHIP 56K	0.50% 1/10W
R506	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W	R587	1-249-441-11	CARBON 100K	5% 1/4W
R507	1-249-411-11	CARBON 330	5% 1/4W	R589	1-249-437-11	CARBON 47K	5% 1/4W
R508	1-216-085-00	METAL GLAZE 33K	5% 1/10W	R591	1-216-105-91	METAL GLAZE 220K	5% 1/10W
R509	1-216-097-91	METAL GLAZE 100K	5% 1/10W	R593	1-215-878-00	METAL OXIDE 33K	5% 1W F
R510	1-249-409-11	CARBON 220	5% 1/4W F	R594	1-247-903-00	CARBON 1M	5% 1/4W
R511	1-249-398-11	CARBON 27	5% 1/4W F	R595	1-249-440-11	CARBON 82K	5% 1/4W
R512	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W	R596	1-249-432-11	CARBON 18K	5% 1/4W
R513	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R597	1-249-437-11	CARBON 47K	5% 1/4W
R514	1-216-091-00	METAL GLAZE 56K	5% 1/10W	R598	1-260-123-11	CARBON 100K	5% 1/2W
R515	1-216-081-00	METAL GLAZE 22K	5% 1/10W	R599	1-216-101-00	METAL GLAZE 150K	5% 1/10W
R516	1-249-409-11	CARBON 220	5% 1/4W F	R1501	1-215-429-00	METAL 2.2K	1% 1/4W
R517	1-247-815-91	CARBON 220	5% 1/4W	R1502	1-215-413-00	METAL 470	1% 1/4W
R518	1-215-883-11	METAL OXIDE 33	5% 2W F	R1505	1-247-807-31	CARBON 100	5% 1/4W
R519	1-260-331-11	CARBON 1.8K	5% 1/2W	R1507	1-249-437-11	CARBON 47K	5% 1/4W
R520	1-216-097-91	METAL GLAZE 100K	5% 1/10W	R1508	1-215-454-00	METAL 24K	1% 1/4W
R521	1-216-480-11	METAL OXIDE 820	5% 3W F	R1509	1-215-455-00	METAL 27K	1% 1/4W
R522	1-216-480-11	METAL OXIDE 820	5% 3W F	R1510	1-249-383-11	CARBON 1.5	5% 1/4W F
R523	1-249-425-11	CARBON 4.7K	5% 1/4W	R1511	1-215-888-00	METAL OXIDE 220	5% 2W F
R524	1-208-806-11	METAL CHIP 10K	0.50% 1/10W	R1512	1-216-370-11	METAL OXIDE 1.2	5% 2W F
				R1513	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
				R1514	1-216-377-11	METAL OXIDE 4.7	5% 2W F
				R1515	1-216-369-00	METAL OXIDE 1	5% 2W F
				R1518	1-249-437-11	CARBON 47K	5% 1/4W

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

AA

AB

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R2401	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	* A-1297-527-A AB BOARD, COMPLETE *****		
R2402	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W			
R2403	1-216-059-00	METAL GLAZE 2.7K	5%	1/10W			
R2404	1-216-059-00	METAL GLAZE 2.7K	5%	1/10W			
R2405	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	<CAPACITOR>		
R2406	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W			
R2407	1-216-073-00	METAL GLAZE 10K	5%	1/10W			
R2408	1-216-073-00	METAL GLAZE 10K	5%	1/10W			
R2409	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	C5305	1-126-933-11 ELECT 100μF 20%	16V
R2410	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	C5307	1-126-967-11 ELECT 47μF 20%	16V
R2411	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	C7020	1-163-001-11 CERAMIC CHIP 220PF 10%	50V
R2412	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	C7021	1-163-809-11 CERAMIC CHIP 0.047μF 10%	25V
R2413	1-216-295-91	CONDUCTOR, CHIP			C7022	1-124-903-11 ELECT 1μF 20%	50V
R2415	1-216-043-91	METAL GLAZE 560	5%	1/10W	C7024	1-124-903-11 ELECT 1μF 20%	50V
R2416	1-216-079-00	METAL GLAZE 18K	5%	1/10W	C7025	1-126-967-11 ELECT 47μF 20%	16V
R2417	1-216-079-00	METAL GLAZE 18K	5%	1/10W	C7026	1-124-902-00 ELECT 0.47μF 20%	50V
R2418	1-216-043-91	METAL GLAZE 560	5%	1/10W	C7028	1-163-141-00 CERAMIC CHIP 0.001μF 5%	50V
R2419	1-216-295-91	CONDUCTOR, CHIP			C7029	1-126-933-11 ELECT 100μF 20%	16V
R2421	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C7037	1-163-105-00 CERAMIC CHIP 33PF 5%	50V
R2422	1-216-081-00	METAL GLAZE 22K	5%	1/10W	C7038	1-163-105-00 CERAMIC CHIP 33PF 5%	50V
R2423	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C7043	1-163-037-11 CERAMIC CHIP 0.022μF 10%	25V
R2424	1-216-097-91	METAL GLAZE 100K	5%	1/10W	C7047	1-163-095-00 CERAMIC CHIP 12PF 5%	50V
R2425	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C7048	1-163-102-00 CERAMIC CHIP 24PF 5%	50V
R2426	1-216-085-00	METAL GLAZE 33K	5%	1/10W	C7051	1-163-031-11 CERAMIC CHIP 0.01μF 50V	
R2427	1-216-077-00	METAL GLAZE 15K	5%	1/10W	C7052	1-128-551-11 ELECT 22μF 20%	25V
R2428	1-216-081-00	METAL GLAZE 22K	5%	1/10W	C7055	1-126-964-11 ELECT 10μF 20%	50V
R2429	1-249-389-11	CARBON 4.7	5%	1/4W F	C7201	1-126-933-11 ELECT 100μF 20%	16V
R2430	1-249-389-11	CARBON 4.7	5%	1/4W F	C7202	1-126-964-11 ELECT 10μF 20%	50V
R2431	1-216-295-91	CONDUCTOR, CHIP			C7203	1-126-933-11 ELECT 100μF 20%	16V
R2433	1-216-079-00	METAL GLAZE 18K	5%	1/10W	C7204	1-126-964-11 ELECT 10μF 20%	50V
R2434	1-216-043-91	METAL GLAZE 560	5%	1/10W	C7205	1-126-933-11 ELECT 100μF 20%	16V
R2435	1-216-079-00	METAL GLAZE 18K	5%	1/10W	C7206	1-164-161-11 CERAMIC CHIP 0.0022μF 10%	50V
R2436	1-216-043-91	METAL GLAZE 560	5%	1/10W	C7207	1-126-933-11 ELECT 100μF 20%	16V
R2437	1-216-295-91	CONDUCTOR, CHIP			C7208	1-126-964-11 ELECT 10μF 20%	50V
R2439	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C7209	1-126-933-11 ELECT 100μF 20%	16V
R2440	1-216-081-00	METAL GLAZE 22K	5%	1/10W	C7210	1-126-964-11 ELECT 10μF 20%	50V
R2441	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C7211	1-126-933-11 ELECT 100μF 20%	16V
R2442	1-216-097-91	METAL GLAZE 100K	5%	1/10W	C7212	1-164-161-11 CERAMIC CHIP 0.0022μF 10%	50V
R2443	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C7213	1-124-903-11 ELECT 1μF 20%	50V
R2444	1-216-085-00	METAL GLAZE 33K	5%	1/10W	C7214	1-124-903-11 ELECT 1μF 20%	50V
R2445	1-216-077-00	METAL GLAZE 15K	5%	1/10W	C7216	1-163-113-00 CERAMIC CHIP 68PF 5%	50V
R2446	1-216-081-00	METAL GLAZE 22K	5%	1/10W	C7218	1-128-551-11 ELECT 22μF 20%	25V
R2448	1-249-389-11	CARBON 4.7	5%	1/4W F	C7219	1-124-903-11 ELECT 1μF 20%	50V
R2449	1-249-389-11	CARBON 4.7	5%	1/4W F	C7220	1-124-903-11 ELECT 1μF 20%	50V
R2450	1-216-075-00	METAL GLAZE 12K	5%	1/10W	C7231	1-163-125-00 CERAMIC CHIP 220PF 5%	50V
R2451	1-216-089-91	METAL GLAZE 47K	5%	1/10W	C7301	1-163-093-00 CERAMIC CHIP 10PF 5%	50V
R2452	1-216-049-91	METAL GLAZE 1K	5%	1/10W	C7302	1-163-093-00 CERAMIC CHIP 10PF 5%	50V
R2453	1-216-049-91	METAL GLAZE 1K	5%	1/10W	C7303	1-126-964-11 ELECT 10μF 20%	50V
R2454	1-216-025-91	METAL GLAZE 100	5%	1/10W	C7306	1-126-964-11 ELECT 10μF 20%	50V
R2455	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C7307	1-126-933-11 ELECT 100μF 20%	16V
R2456	1-216-073-00	METAL GLAZE 10K	5%	1/10W	C7309	1-124-903-11 ELECT 1μF 20%	50V
					C7310	1-163-038-91 CERAMIC CHIP 0.1μF 25V	
					C7311	1-126-964-11 ELECT 10μF 20%	50V
					C7312	1-163-038-91 CERAMIC CHIP 0.1μF 25V	
					C7313	1-126-967-11 ELECT 47μF 20%	16V
					C7314	1-163-243-11 CERAMIC CHIP 47PF 5%	50V
					C7320	1-164-232-11 CERAMIC CHIP 0.01μF 10%	50V
					C7321	1-126-964-11 ELECT 10μF 20%	50V
					C7324	1-163-038-91 CERAMIC CHIP 0.1μF 25V	
					C7329	1-163-037-11 CERAMIC CHIP 0.022μF 10%	25V
T501	Δ X-4033-094-1	TRANSFORMER ASSY. FLYBACK (NX-3001)			C7330	1-163-251-11 CERAMIC CHIP 100PF 5%	50V
T502	Δ 1-460-199-11	TRANSFORMER (HLT)			C7331	1-163-141-00 CERAMIC CHIP 0.001μF 5%	50V
T503	1-437-217-11	TRANSFORMER, HORIZONTAL DRIVE			C7332	1-163-141-00 CERAMIC CHIP 0.001μF 5%	50V
T504	1-424-584-11	TRANSFORMER, DYNAMIC FOCUS			C7333	1-164-695-11 CERAMIC CHIP 0.0022μF 5%	50V
					C7334	1-164-695-11 CERAMIC CHIP 0.0022μF 5%	50V
					C7335	1-124-903-11 ELECT 1μF 20%	50V
					C7336	1-124-903-11 ELECT 1μF 20%	50V
					C7337	1-164-004-11 CERAMIC CHIP 0.1μF 10%	25V
TH1501	1-807-925-11	THERMISTOR			C7338	1-126-964-11 ELECT 10μF 20%	50V
					C7401	1-137-399-11 FILM 0.1μF 5%	50V

AB

REF. NO.	PART NO.	DESCRIPTION	REMARK
C7402	1-137-399-11	FILM 0.1μF 5%	50V
C7403	1-137-399-11	FILM 0.1μF 5%	50V
C7404	1-137-399-11	FILM 0.1μF 5%	50V
C7405	1-126-964-11	ELECT 10μF 20%	50V
C7406	1-128-551-11	ELECT 22μF 20%	25V
C7407	1-126-967-11	ELECT 47μF 20%	16V
C7408	1-137-366-11	FILM 0.0022μF 5%	50V
C7409	1-137-366-11	FILM 0.0022μF 5%	50V
C7410	1-126-964-11	ELECT 10μF 20%	50V
C7411	1-137-399-11	FILM 0.1μF 5%	50V
C7412	1-137-399-11	FILM 0.1μF 5%	50V
C7413	1-124-927-11	ELECT 4.7μF 20%	50V
C7414	1-128-551-11	ELECT 22μF 20%	25V
C7415	1-124-927-11	ELECT 4.7μF 20%	50V
C7416	1-128-551-11	ELECT 22μF 20%	25V
C7417	1-126-967-11	ELECT 47μF 20%	16V
C7418	1-126-935-11	ELECT 470μF 20%	16V
C7419	1-126-964-11	ELECT 10μF 20%	50V
C7502	1-126-940-11	ELECT 330μF 20%	16V
C7503	1-128-551-11	ELECT 22μF 20%	25V
C7504	1-126-934-11	ELECT 220μF 20%	16V
C7507	1-126-934-11	ELECT 220μF 20%	16V
C7511	1-128-551-11	ELECT 22μF 20%	25V
C7512	1-126-934-11	ELECT 220μF 20%	16V
C7519	1-128-551-11	ELECT 22μF 20%	25V
C7520	1-126-934-11	ELECT 220μF 20%	16V
C7521	1-126-934-11	ELECT 220μF 20%	16V
C7531	1-124-927-11	ELECT 4.7μF 20%	50V
C7537	1-124-927-11	ELECT 4.7μF 20%	50V
C7539	1-104-760-11	CERAMIC CHIP 0.047μF 10%	50V
C7542	1-126-933-11	ELECT 100μF 20%	16V
C7543	1-163-017-00	CERAMIC CHIP 0.0047μF 10%	50V
C7544	1-126-934-11	ELECT 220μF 20%	16V
C7545	1-124-927-11	ELECT 4.7μF 20%	50V
C7547	1-124-927-11	ELECT 4.7μF 20%	50V
C7551	1-126-934-11	ELECT 220μF 20%	16V
C7562	1-124-927-11	ELECT 4.7μF 20%	50V
C7563	1-124-927-11	ELECT 4.7μF 20%	50V
C7564	1-163-017-00	CERAMIC CHIP 0.0047μF 10%	50V
C7565	1-163-017-00	CERAMIC CHIP 0.0047μF 10%	50V
C7566	1-104-760-11	CERAMIC CHIP 0.047μF 10%	50V
C7567	1-126-933-11	ELECT 100μF 20%	16V
C7568	1-126-964-11	ELECT 10μF 20%	50V
C7569	1-126-964-11	ELECT 10μF 20%	50V
C7570	1-163-017-00	CERAMIC CHIP 0.0047μF 10%	50V
C7610	1-126-933-11	ELECT 100μF 20%	16V
C7718	1-126-933-11	ELECT 100μF 20%	16V

<FILTER BLOCK>

CM5301 1-467-554-21 FILTER BLOCK, COMB

<CONNECTOR>

CN7001 * 1-770-680-11 CONNECTOR, BOARD TO BOARD (PLUG)
 CN7003 1-750-426-11 CONNECTOR, FFC/FPC 21P
 CN7004 * 1-564-507-11 PLUG, CONNECTOR 4P
 CN7006 1-564-510-11 PLUG, CONNECTOR 7P
 CN7008 * 1-564-514-11 PLUG, CONNECTOR 11P
 CN7009 * 1-560-124-00 PLUG, CONNECTOR (2.5MM) 4P
 CN7010 * 1-750-416-11 CONNECTOR, FFC/FPC 11P
 CN7014 1-774-138-11 SOCKET, CONNECTOR 36P

<DIODE>

D7001 8-719-991-33 DIODE 1SS133T-77
 D7002 8-719-991-33 DIODE 1SS133T-77
 D7003 8-719-991-33 DIODE 1SS133T-77
 D7004 8-719-991-33 DIODE 1SS133T-77

REF. NO.	PART NO.	DESCRIPTION	REMARK
D7005	8-719-991-33	DIODE 1SS133T-77	
D7006	8-719-991-33	DIODE 1SS133T-77	
D7007	8-719-991-33	DIODE 1SS133T-77	
D7008	8-719-991-33	DIODE 1SS133T-77	
D7009	8-719-991-33	DIODE 1SS133T-77	
D7301	8-719-991-33	DIODE 1SS133T-77	
D7401	8-719-991-33	DIODE 1SS133T-77	
D7402	8-719-991-33	DIODE 1SS133T-77	
D7403	8-719-991-33	DIODE 1SS133T-77	
D7404	8-719-991-33	DIODE 1SS133T-77	
D7405	8-719-991-33	DIODE 1SS133T-77	
D7406	8-719-991-33	DIODE 1SS133T-77	
D7407	8-719-991-33	DIODE 1SS133T-77	
D7408	8-719-991-33	DIODE 1SS133T-77	
D7409	8-719-991-33	DIODE 1SS133T-77	

<IC>

IC7001 8-752-869-30 IC CXP85340A-049S
 IC7003 8-759-280-74 IC ST24C02CB1
 IC7004 8-759-403-44 IC MN1280-S
 IC7005 8-759-256-59 IC HD74HC00FPEL
 IC7201 8-759-300-71 IC HD14053BFP
 IC7301 8-759-335-14 IC HD6433947A05F
 IC7302 8-759-403-44 IC MN1280-S
 IC7303 8-759-335-18 IC MB90091-104
 IC7306 8-759-335-19 IC LH53171K
 IC7307 8-759-925-85 IC SN74HC32ANS
 IC7308 8-759-256-59 IC HD74HC00FPEL
 IC7309 8-759-287-83 IC SN74HC74ANS-E20
 IC7310 8-759-256-59 IC HD74HC00FPEL
 IC7311 8-759-514-57 IC BA7046F
 IC7401 8-759-273-12 IC TDA7315D013TR
 IC7402 8-759-100-96 IC μPC4558G2
 IC7501 8-759-262-02 IC MC14577CP
 IC7502 8-759-262-02 IC MC14577CP
 IC7503 8-759-262-02 IC MC14577CP
 IC7504 8-759-262-02 IC MC14577CP
 IC7505 8-759-262-02 IC MC14577CP
 IC7506 8-759-262-02 IC MC14577CP
 IC7507 8-759-262-02 IC MC14577CP
 IC7508 8-759-262-02 IC MC14577CP
 IC7509 8-759-100-96 IC μPC4558G2
 IC7510 8-759-100-96 IC μPC4558G2

<JACK>

J7001 1-563-330-11 JACK
 J7002 1-563-330-11 JACK

<COIL>

L7001 1-410-470-11 INDUCTOR 10μH
 L7006 1-408-414-00 INDUCTOR 27μH
 L7204 1-408-408-00 INDUCTOR 8.2μH
 L7208 1-408-408-00 INDUCTOR 8.2μH
 L7301 1-410-470-11 INDUCTOR 10μH
 L7302 1-410-478-11 INDUCTOR 47μH

<TRANSISTOR>

Q7001 8-729-216-22 TRANSISTOR 2SA1162-G
 Q7002 8-729-216-22 TRANSISTOR 2SA1162-G
 Q7003 8-729-216-22 TRANSISTOR 2SA1162-G
 Q7004 8-729-216-22 TRANSISTOR 2SA1162-G
 Q7005 8-729-422-27 TRANSISTOR 2SD601A-Q
 Q7006 8-729-216-22 TRANSISTOR 2SA1162-G
 Q7007 8-729-216-22 TRANSISTOR 2SA1162-G

AB

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
Q7008	8-729-216-22	TRANSISTOR 2SA1162-G		R7009	1-216-033-00	METAL GLAZE 220	5%
Q7009	8-729-422-27	TRANSISTOR 2SD601A-Q		R7010	1-216-033-00	METAL GLAZE 220	5%
Q7010	8-729-422-27	TRANSISTOR 2SD601A-Q		R7011	1-216-033-00	METAL GLAZE 220	5%
Q7011	8-729-422-27	TRANSISTOR 2SD601A-Q		R7012	1-216-033-00	METAL GLAZE 220	5%
Q7012	8-729-216-22	TRANSISTOR 2SA1162-G		R7013	1-216-033-00	METAL GLAZE 220	5%
Q7013	8-729-422-27	TRANSISTOR 2SD601A-Q		R7014	1-216-033-00	METAL GLAZE 220	5%
Q7017	8-729-422-27	TRANSISTOR 2SD601A-Q		R7015	1-216-033-00	METAL GLAZE 220	5%
Q7020	8-729-216-22	TRANSISTOR 2SA1162-G		R7016	1-216-033-00	METAL GLAZE 220	5%
Q7021	8-729-422-27	TRANSISTOR 2SD601A-Q		R7017	1-216-081-00	METAL GLAZE 22K	5%
Q7201	8-729-422-27	TRANSISTOR 2SD601A-Q		R7018	1-216-033-00	METAL GLAZE 220	5%
Q7203	8-729-216-22	TRANSISTOR 2SA1162-G		R7019	1-216-081-00	METAL GLAZE 22K	5%
Q7204	8-729-216-22	TRANSISTOR 2SA1162-G		R7020	1-216-033-00	METAL GLAZE 220	5%
Q7205	8-729-216-22	TRANSISTOR 2SA1162-G		R7021	1-216-033-00	METAL GLAZE 220	5%
Q7206	8-729-216-22	TRANSISTOR 2SA1162-G		R7022	1-216-033-00	METAL GLAZE 220	5%
Q7207	8-729-216-22	TRANSISTOR 2SA1162-G		R7023	1-216-033-00	METAL GLAZE 220	5%
Q7209	8-729-422-27	TRANSISTOR 2SD601A-Q		R7024	1-216-033-00	METAL GLAZE 220	5%
Q7210	8-729-422-27	TRANSISTOR 2SD601A-Q		R7025	1-216-033-00	METAL GLAZE 220	5%
Q7301	8-729-422-27	TRANSISTOR 2SD601A-Q		R7026	1-216-033-00	METAL GLAZE 220	5%
Q7303	8-729-422-27	TRANSISTOR 2SD601A-Q		R7027	1-216-073-00	METAL GLAZE 10K	5%
Q7307	8-729-422-27	TRANSISTOR 2SD601A-Q		R7028	1-216-033-00	METAL GLAZE 220	5%
Q7309	8-729-216-22	TRANSISTOR 2SA1162-G		R7029	1-216-049-91	METAL GLAZE 1K	5%
Q7310	8-729-422-27	TRANSISTOR 2SD601A-Q		R7030	1-216-049-91	METAL GLAZE 1K	5%
Q7311	8-729-422-27	TRANSISTOR 2SD601A-Q		R7031	1-216-049-91	METAL GLAZE 1K	5%
Q7401	8-729-216-22	TRANSISTOR 2SA1162-G		R7032	1-216-065-00	METAL GLAZE 4.7K	5%
Q7402	8-729-216-22	TRANSISTOR 2SA1162-G		R7033	1-216-065-00	METAL GLAZE 4.7K	5%
Q7501	8-729-422-27	TRANSISTOR 2SD601A-Q		R7034	1-216-065-00	METAL GLAZE 4.7K	5%
Q7502	8-729-422-27	TRANSISTOR 2SD601A-Q		R7035	1-216-065-00	METAL GLAZE 4.7K	5%
Q7503	8-729-422-27	TRANSISTOR 2SD601A-Q		R7036	1-216-073-00	METAL GLAZE 10K	5%
Q7504	8-729-216-22	TRANSISTOR 2SA1162-G		R7037	1-216-057-00	METAL GLAZE 2.2K	5%
Q7505	8-729-422-27	TRANSISTOR 2SD601A-Q		R7038	1-216-097-91	METAL GLAZE 100K	5%
Q7506	8-729-422-27	TRANSISTOR 2SD601A-Q		R7039	1-216-121-91	METAL GLAZE 1M	5%
Q7507	8-729-422-27	TRANSISTOR 2SD601A-Q		R7040	1-216-073-00	METAL GLAZE 10K	5%
Q7508	8-729-422-27	TRANSISTOR 2SD601A-Q		R7041	1-216-065-00	METAL GLAZE 4.7K	5%
Q7509	8-729-216-22	TRANSISTOR 2SA1162-G		R7042	1-216-073-00	METAL GLAZE 10K	5%
Q7517	8-729-422-27	TRANSISTOR 2SD601A-Q		R7043	1-216-057-00	METAL GLAZE 2.2K	5%
Q7520	8-729-422-27	TRANSISTOR 2SD601A-Q		R7044	1-216-089-91	METAL GLAZE 47K	5%
Q7523	8-729-422-27	TRANSISTOR 2SD601A-Q		R7045	1-216-089-91	METAL GLAZE 47K	5%
Q7525	8-729-422-27	TRANSISTOR 2SD601A-Q		R7046	1-216-065-00	METAL GLAZE 4.7K	5%
Q7526	8-729-422-27	TRANSISTOR 2SD601A-Q		R7047	1-216-097-91	METAL GLAZE 100K	5%
Q7527	8-729-422-27	TRANSISTOR 2SD601A-Q		R7048	1-216-105-91	METAL GLAZE 220K	5%
Q7528	8-729-422-27	TRANSISTOR 2SD601A-Q		R7049	1-216-057-00	METAL GLAZE 2.2K	5%
Q7529	8-729-422-27	TRANSISTOR 2SD601A-Q		R7050	1-216-065-00	METAL GLAZE 4.7K	5%
Q7530	8-729-422-27	TRANSISTOR 2SD601A-Q		R7051	1-216-089-91	METAL GLAZE 47K	5%
Q7531	8-729-422-27	TRANSISTOR 2SD601A-Q		R7052	1-216-093-00	METAL GLAZE 68K	5%
Q7532	8-729-422-27	TRANSISTOR 2SD601A-Q		R7053	1-216-097-91	METAL GLAZE 100K	5%
Q7601	8-729-216-22	TRANSISTOR 2SA1162-G		R7054	1-216-073-00	METAL GLAZE 10K	5%
Q7602	8-729-216-22	TRANSISTOR 2SA1162-G		R7055	1-216-065-00	METAL GLAZE 4.7K	5%
Q7603	8-729-216-22	TRANSISTOR 2SA1162-G		R7056	1-216-081-00	METAL GLAZE 22K	5%
Q7604	8-729-422-27	TRANSISTOR 2SD601A-Q		R7057	1-216-041-00	METAL GLAZE 470	5%
<RESISTOR>				R7058	1-216-023-00	METAL GLAZE 82	5%
R5302	1-216-295-91	CONDUCTOR, CHIP		R7059	1-216-097-91	METAL GLAZE 100K	5%
R5303	1-216-295-91	CONDUCTOR, CHIP		R7060	1-216-089-91	METAL GLAZE 47K	5%
R5310	1-216-295-91	CONDUCTOR, CHIP		R7061	1-216-089-91	METAL GLAZE 47K	5%
R5316	1-216-049-91	METAL GLAZE 1K	5%	R7062	1-216-097-91	METAL GLAZE 100K	5%
R5317	1-216-049-91	METAL GLAZE 1K	5%	R7063	1-216-041-00	METAL GLAZE 470	5%
R5318	1-216-025-91	METAL GLAZE 100	5%	R7066	1-216-033-00	METAL GLAZE 220	5%
R5319	1-216-025-91	METAL GLAZE 100	5%	R7067	1-216-033-00	METAL GLAZE 220	5%
R5321	1-216-295-91	CONDUCTOR, CHIP		R7068	1-216-033-00	METAL GLAZE 220	5%
R7001	1-216-033-00	METAL GLAZE 220	5%	R7070	1-216-033-00	METAL GLAZE 220	5%
R7002	1-216-033-00	METAL GLAZE 220	5%	R7071	1-216-033-00	METAL GLAZE 220	5%
R7003	1-216-033-00	METAL GLAZE 220	5%	R7072	1-216-033-00	METAL GLAZE 220	5%
R7004	1-216-049-91	METAL GLAZE 1K	5%	R7073	1-216-033-00	METAL GLAZE 220	5%
R7005	1-216-081-00	METAL GLAZE 22K	5%	R7074	1-216-033-00	METAL GLAZE 220	5%
R7006	1-216-033-00	METAL GLAZE 220	5%	R7075	1-216-033-00	METAL GLAZE 220	5%
R7007	1-216-033-00	METAL GLAZE 220	5%	R7076	1-216-033-00	METAL GLAZE 220	5%
R7008	1-216-049-91	METAL GLAZE 1K	5%	R7078	1-216-041-00	METAL GLAZE 470	5%
				R7080	1-216-033-00	METAL GLAZE 220	5%
				R7082	1-216-049-91	METAL GLAZE 1K	5%
				R7084	1-216-033-00	METAL GLAZE 220	5%

AB

REF. NO.	PART NO.	DESCRIPTION	REMARK
R7085	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7086	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7087	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7088	1-216-295-91	CONDUCTOR, CHIP	
R7089	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7090	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7091	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7092	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7093	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7094	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7096	1-216-295-91	CONDUCTOR, CHIP	
R7097	1-216-295-91	CONDUCTOR, CHIP	
R7099	1-216-295-91	CONDUCTOR, CHIP	
R7100	1-216-295-91	CONDUCTOR, CHIP	
R7106	1-216-295-91	CONDUCTOR, CHIP	
R7114	1-216-295-91	CONDUCTOR, CHIP	
R7115	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7116	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7117	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7118	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7119	1-216-037-00	METAL GLAZE 330	5% 1/10W
R7120	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7125	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7126	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7127	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7128	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7129	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7130	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R7132	1-216-295-91	CONDUCTOR, CHIP	
R7133	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7134	1-216-053-00	METAL GLAZE 1.5K	5% 1/10W
R7135	1-260-316-51	CARBON 100	5% 1/2W
R7136	1-260-316-51	CARBON 100	5% 1/2W
R7137	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7201	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R7202	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7203	1-216-083-00	METAL GLAZE 27K	5% 1/10W
R7204	1-216-689-11	METAL GLAZE 39K	5% 1/10W
R7205	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7206	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7207	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7208	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7209	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R7212	1-216-083-00	METAL GLAZE 27K	5% 1/10W
R7213	1-216-689-11	METAL GLAZE 39K	5% 1/10W
R7214	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7216	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7218	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7220	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7222	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7226	1-216-041-00	METAL GLAZE 470	5% 1/10W
R7228	1-216-295-91	CONDUCTOR, CHIP	
R7229	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7230	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7231	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R7232	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R7236	1-216-295-91	CONDUCTOR, CHIP	
R7237	1-216-295-91	CONDUCTOR, CHIP	
R7240	1-216-045-00	METAL GLAZE 680	5% 1/10W
R7244	1-216-295-91	CONDUCTOR, CHIP	
R7245	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7246	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7247	1-216-043-91	METAL GLAZE 560	5% 1/10W
R7248	1-216-045-00	METAL GLAZE 680	5% 1/10W
R7249	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7250	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7252	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7253	1-216-295-91	CONDUCTOR, CHIP	

REF. NO.	PART NO.	DESCRIPTION	REMARK
R7254	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7255	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7258	1-216-295-91	CONDUCTOR, CHIP	
R7259	1-216-295-91	CONDUCTOR, CHIP	
R7260	1-216-295-91	CONDUCTOR, CHIP	
R7262	1-216-295-91	CONDUCTOR, CHIP	
R7264	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R7266	1-216-295-91	CONDUCTOR, CHIP	
R7301	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7302	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7303	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7304	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7305	1-216-121-91	METAL GLAZE 1M	5% 1/10W
R7306	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7307	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7308	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7309	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7310	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7311	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7312	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7313	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7314	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7315	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7316	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7317	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7318	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7319	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7320	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7321	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7323	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7324	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7325	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7326	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7327	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7330	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7331	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7332	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7333	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7334	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R7335	1-216-097-91	METAL GLAZE 100K	5% 1/10W
R7336	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7337	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7338	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7339	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7340	1-216-033-00	METAL GLAZE 220	5% 1/10W
R7341	1-216-045-00	METAL GLAZE 680	5% 1/10W
R7342	1-216-035-00	METAL GLAZE 270	5% 1/10W
R7343	1-216-295-91	CONDUCTOR, CHIP	
R7345	1-216-099-00	METAL GLAZE 120K	5% 1/10W
R7346	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R7347	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7348	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7349	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7350	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7352	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7353	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R7362	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7363	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7366	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7367	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7370	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7371	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7374	1-216-295-91	CONDUCTOR, CHIP	
R7375	1-216-295-91	CONDUCTOR, CHIP	
R7376	1-216-295-91	CONDUCTOR, CHIP	
R7377	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7378	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7379	1-216-025-91	METAL GLAZE 100	5% 1/10W

AB

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R7383	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R7560	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7385	1-216-033-00	METAL GLAZE 220	5%	1/10W	R7562	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7386	1-216-033-00	METAL GLAZE 220	5%	1/10W	R7564	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7387	1-216-033-00	METAL GLAZE 220	5%	1/10W	R7567	1-216-041-00	METAL GLAZE 470 5% 1/10W
R7388	1-216-033-00	METAL GLAZE 220	5%	1/10W	R7568	1-216-041-00	METAL GLAZE 470 5% 1/10W
R7389	1-216-033-00	METAL GLAZE 220	5%	1/10W	R7573	1-216-041-00	METAL GLAZE 470 5% 1/10W
R7390	1-216-037-00	METAL GLAZE 330	5%	1/10W	R7574	1-216-041-00	METAL GLAZE 470 5% 1/10W
R7391	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	R7577	1-216-295-91	CONDUCTOR, CHIP
R7392	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	R7580	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7393	1-216-061-00	METAL GLAZE 3.3K	5%	1/10W	R7582	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7394	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R7584	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7395	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R7589	1-216-041-00	METAL GLAZE 470 5% 1/10W
R7396	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R7595	1-216-041-00	METAL GLAZE 470 5% 1/10W
R7397	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R7597	1-216-295-91	CONDUCTOR, CHIP
R7398	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R7600	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7399	1-216-081-00	METAL GLAZE 22K	5%	1/10W	R7602	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7401	1-216-033-00	METAL GLAZE 220	5%	1/10W	R7604	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7402	1-216-033-00	METAL GLAZE 220	5%	1/10W	R7605	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7403	1-216-025-91	METAL GLAZE 100	5%	1/10W	R7606	1-216-295-91	CONDUCTOR, CHIP
R7404	1-216-025-91	METAL GLAZE 100	5%	1/10W	R7608	1-216-295-91	CONDUCTOR, CHIP
R7405	1-216-067-00	METAL GLAZE 5.6K	5%	1/10W	R7609	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7406	1-216-067-00	METAL GLAZE 5.6K	5%	1/10W	R7611	1-216-295-91	CONDUCTOR, CHIP
R7407	1-216-025-91	METAL GLAZE 100	5%	1/10W	R7612	1-216-295-91	CONDUCTOR, CHIP
R7408	1-216-025-91	METAL GLAZE 100	5%	1/10W	R7613	1-216-295-91	CONDUCTOR, CHIP
R7409	1-216-099-00	METAL GLAZE 120K	5%	1/10W	R7614	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7410	1-216-025-91	METAL GLAZE 100	5%	1/10W	R7615	1-216-025-91	METAL GLAZE 100 5% 1/10W
R7411	1-216-097-91	METAL GLAZE 100K	5%	1/10W	R7616	1-216-057-00	METAL GLAZE 2.2K 5% 1/10W
R7412	1-216-025-91	METAL GLAZE 100	5%	1/10W	R7617	1-216-295-91	CONDUCTOR, CHIP
R7413	1-216-097-91	METAL GLAZE 100K	5%	1/10W	R7620	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7414	1-216-099-00	METAL GLAZE 120K	5%	1/10W	R7622	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7415	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	R7624	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7416	1-216-071-00	METAL GLAZE 8.2K	5%	1/10W	R7625	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7417	1-216-295-91	CONDUCTOR, CHIP			R7626	1-216-295-91	CONDUCTOR, CHIP
R7418	1-216-071-00	METAL GLAZE 8.2K	5%	1/10W	R7627	1-216-295-91	CONDUCTOR, CHIP
R7419	1-216-295-91	CONDUCTOR, CHIP			R7629	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7420	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	R7630	1-216-295-91	CONDUCTOR, CHIP
R7421	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R7631	1-216-295-91	CONDUCTOR, CHIP
R7422	1-216-025-91	METAL GLAZE 100	5%	1/10W	R7633	1-216-295-91	CONDUCTOR, CHIP
R7423	1-216-295-91	CONDUCTOR, CHIP			R7635	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7425	1-216-089-91	METAL GLAZE 47K	5%	1/10W	R7636	1-216-295-91	CONDUCTOR, CHIP
R7426	1-216-081-00	METAL GLAZE 22K	5%	1/10W	R7637	1-216-295-91	CONDUCTOR, CHIP
R7502	1-216-295-91	CONDUCTOR, CHIP			R7640	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7503	1-216-295-91	CONDUCTOR, CHIP			R7642	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7506	1-216-097-91	METAL GLAZE 100K	5%	1/10W	R7644	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7507	1-216-295-91	CONDUCTOR, CHIP			R7645	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7509	1-216-295-91	CONDUCTOR, CHIP			R7646	1-216-295-91	CONDUCTOR, CHIP
R7511	1-216-295-91	CONDUCTOR, CHIP			R7647	1-216-295-91	CONDUCTOR, CHIP
R7515	1-216-041-00	METAL GLAZE 470	5%	1/10W	R7649	1-216-295-91	CONDUCTOR, CHIP
R7516	1-216-041-00	METAL GLAZE 470	5%	1/10W	R7650	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7517	1-216-295-91	CONDUCTOR, CHIP			R7651	1-216-295-91	CONDUCTOR, CHIP
R7520	1-216-021-00	METAL GLAZE 68	5%	1/10W	R7652	1-216-295-91	CONDUCTOR, CHIP
R7522	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R7654	1-216-295-91	CONDUCTOR, CHIP
R7524	1-216-021-00	METAL GLAZE 68	5%	1/10W	R7655	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7526	1-216-097-91	METAL GLAZE 100K	5%	1/10W	R7656	1-216-295-91	CONDUCTOR, CHIP
R7530	1-216-041-00	METAL GLAZE 470	5%	1/10W	R7657	1-216-295-91	CONDUCTOR, CHIP
R7531	1-216-295-91	CONDUCTOR, CHIP			R7660	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7532	1-216-041-00	METAL GLAZE 470	5%	1/10W	R7662	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7536	1-216-041-00	METAL GLAZE 470	5%	1/10W	R7664	1-216-021-00	METAL GLAZE 68 5% 1/10W
R7537	1-216-295-91	CONDUCTOR, CHIP			R7665	1-216-085-00	METAL GLAZE 33K 5% 1/10W
R7540	1-216-021-00	METAL GLAZE 68	5%	1/10W	R7666	1-216-089-91	METAL GLAZE 47K 5% 1/10W
R7542	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R7667	1-216-690-11	METAL CHIP 43K 0.50% 1/10W
R7544	1-216-021-00	METAL GLAZE 68	5%	1/10W	R7668	1-216-065-00	METAL GLAZE 4.7K 5% 1/10W
R7545	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R7669	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7546	1-216-081-00	METAL GLAZE 22K	5%	1/10W	R7670	1-216-081-00	METAL GLAZE 22K 5% 1/10W
R7547	1-216-041-00	METAL GLAZE 470	5%	1/10W	R7671	1-216-089-91	METAL GLAZE 47K 5% 1/10W
R7551	1-216-295-91	CONDUCTOR, CHIP			R7672	1-216-081-00	METAL GLAZE 22K 5% 1/10W
R7552	1-216-041-00	METAL GLAZE 470	5%	1/10W	R7673	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7553	1-216-041-00	METAL GLAZE 470	5%	1/10W	R7675	1-216-049-91	METAL GLAZE 1K 5% 1/10W
R7557	1-216-295-91	CONDUCTOR, CHIP					

AB

M

Les composants identifiés par
une trame et une marque Δ
sont critiques pour la sécurité.
Ne les remplacer que par une
pièce portant le numéro spécifique.

The components identified by
shading and mark Δ are critical
for safety.
Replace only with part number
specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK
R7677	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7678	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7679	1-216-085-00	METAL GLAZE 33K	5% 1/10W
R7680	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R7681	1-216-690-11	METAL CHIP 43K	0.50% 1/10W
R7682	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7683	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7684	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R7685	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R7686	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R7687	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7689	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7691	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7692	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R7693	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R7694	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R7695	1-216-295-91	CONDUCTOR, CHIP	
R7698	1-216-295-91	CONDUCTOR, CHIP	
R7700	1-216-295-91	CONDUCTOR, CHIP	
R7701	1-216-295-91	CONDUCTOR, CHIP	
R7704	1-216-295-91	CONDUCTOR, CHIP	
R7705	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7706	1-216-295-91	CONDUCTOR, CHIP	
R7707	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7708	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7709	1-216-295-91	CONDUCTOR, CHIP	
R7710	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7711	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7712	1-216-295-91	CONDUCTOR, CHIP	
R7714	1-216-295-91	CONDUCTOR, CHIP	
R7715	1-216-295-91	CONDUCTOR, CHIP	
R7716	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R7719	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7720	1-216-069-00	METAL GLAZE 6.8K	5% 1/10W
R7721	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R7722	1-216-069-00	METAL GLAZE 6.8K	5% 1/10W
R7723	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R7724	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7725	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7726	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7727	1-216-025-91	METAL GLAZE 100	5% 1/10W
R7728	1-216-295-91	CONDUCTOR, CHIP	
R7729	1-216-049-91	METAL GLAZE 1K	5% 1/10W

<TUNER>

TU7201 Δ 8-598-254-00 TUNER BTF-WA402
 TU7202 Δ 8-598-047-11 TUNER, ET BTF-LA401

<CRYSTAL>

X7001 1-760-817-11 VIBRATOR, CRYSTAL
 X7301 1-567-925-11 VIBRATOR, CRYSTAL

* A-1306-504-A M BOARD, COMPLETE

4-382-854-11 SCREW (M3X10), P, SW (+)

<CAPACITOR>

C0004	1-126-967-11	ELECT	47 μ F	20%	16V
C0014	1-164-222-11	CERAMIC CHIP	0.22 μ F		25V
C0022	1-163-031-11	CERAMIC CHIP	0.01 μ F		50V
C0023	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C0024	1-163-229-11	CERAMIC CHIP	12PF	5%	50V

REF. NO.	PART NO.	DESCRIPTION	REMARK
C0026	1-163-105-00	CERAMIC CHIP 33PF	5% 50V
C0028	1-126-940-11	ELECT 330 μ F	20% 16V
C0029	1-163-102-00	CERAMIC CHIP 24PF	5% 50V
C0030	1-163-017-00	CERAMIC CHIP 0.0047 μ F	10% 50V
C0034	1-163-037-11	CERAMIC CHIP 0.022 μ F	10% 25V
C0041	1-126-964-11	ELECT 10 μ F	20% 50V
C0046	1-163-125-00	CERAMIC CHIP 220PF	5% 50V
C0064	1-126-967-11	ELECT 47 μ F	20% 16V
C0065	1-126-967-11	ELECT 47 μ F	20% 16V
C0067	1-163-125-00	CERAMIC CHIP 220PF	5% 50V
C0068	1-163-125-00	CERAMIC CHIP 220PF	5% 50V
C0069	1-126-964-11	ELECT 10 μ F	20% 50V
C0070	1-126-935-11	ELECT 470 μ F	20% 16V
C0072	1-126-965-11	ELECT 22 μ F	20% 50V
C0073	1-126-964-11	ELECT 10 μ F	20% 50V
C0074	1-126-933-11	ELECT 100 μ F	20% 10V
C3003	1-128-551-11	ELECT 22 μ F	20% 25V
C3004	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3006	1-124-925-11	ELECT 2.2 μ F	20% 50V
C3009	1-163-141-00	CERAMIC CHIP 0.001 μ F	5% 50V
C3010	1-126-935-11	ELECT 470 μ F	20% 16V
C3011	1-126-967-11	ELECT 47 μ F	20% 16V
C3012	1-124-902-00	ELECT 0.47 μ F	20% 50V
C3013	1-163-251-11	CERAMIC CHIP 100PF	5% 50V
C3014	1-126-967-11	ELECT 47 μ F	20% 16V
C3015	1-124-925-11	ELECT 2.2 μ F	20% 50V
C3016	1-124-902-00	ELECT 0.47 μ F	20% 50V
C3018	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3019	1-124-927-11	ELECT 4.7 μ F	20% 50V
C3020	1-124-903-11	ELECT 1 μ F	20% 50V
C3021	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3022	1-124-903-11	ELECT 1 μ F	20% 50V
C3023	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3024	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3025	1-163-017-00	CERAMIC CHIP 0.0047 μ F	10% 50V
C3026	1-163-017-00	CERAMIC CHIP 0.0047 μ F	10% 50V
C3027	1-163-019-00	CERAMIC CHIP 0.0068 μ F	10% 50V
C3028	1-163-017-00	CERAMIC CHIP 0.0047 μ F	10% 50V
C3030	1-128-551-11	ELECT 22 μ F	20% 25V
C3031	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3033	1-124-927-11	ELECT 4.7 μ F	20% 50V
C3034	1-124-902-00	ELECT 0.47 μ F	20% 50V
C3035	1-124-902-00	ELECT 0.47 μ F	20% 50V
C3036	1-124-902-00	ELECT 0.47 μ F	20% 50V
C3037	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3038	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3039	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3040	1-124-902-00	ELECT 0.47 μ F	20% 50V
C3041	1-163-133-00	CERAMIC CHIP 470PF	5% 50V
C3042	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3043	1-163-243-11	CERAMIC CHIP 47PF	5% 50V
C3044	1-126-933-11	ELECT 100 μ F	20% 16V
C3045	1-163-097-00	CERAMIC CHIP 15PF	5% 50V
C3046	1-124-902-00	ELECT 0.47 μ F	20% 50V
C3048	1-126-964-11	ELECT 10 μ F	20% 50V
C3049	1-163-101-00	CERAMIC CHIP 22PF	5% 50V
C3050	1-128-551-11	ELECT 22 μ F	20% 25V
C3051	1-163-251-11	CERAMIC CHIP 100PF	5% 50V
C3055	1-164-232-11	CERAMIC CHIP 0.01 μ F	10% 50V
C3062	1-163-243-11	CERAMIC CHIP 47PF	5% 50V
C3063	1-163-243-11	CERAMIC CHIP 47PF	5% 50V
C3064	1-163-037-11	CERAMIC CHIP 0.022 μ F	10% 25V
C3066	1-126-933-11	ELECT 100 μ F	20% 16V
C3067	1-126-933-11	ELECT 100 μ F	20% 16V
C3068	1-137-370-11	FILM 0.01 μ F	5% 50V
C3069	1-137-370-11	FILM 0.01 μ F	5% 50V
C3070	1-163-009-11	CERAMIC CHIP 0.001 μ F	10% 50V
C3072	1-126-964-11	ELECT 10 μ F	20% 50V



REF. NO.	PART NO.	DESCRIPTION	REMARK
C3085	1-128-551-11	ELECT 22μF 20%	25V
C3086	1-126-967-11	ELECT 47μF 20%	16V

<CONNECTOR>

CN0001	*1-564-515-11	PLUG, CONNECTOR 12P	
CN0002	*1-691-914-11	CONNECTOR, BOARD TO BOARD 15P	
CN0005	1-564-505-11	PLUG, CONNECTOR 2P	
CN0007	1-764-812-11	CONNECTOR, BOARD TO BOARD 11P	
CN0008	1-508-784-00	PIN, CONNECTOR (5mm PITCH) 1P	
CN3003	1-564-510-11	PLUG, CONNECTOR 7P	
CN3004	1-766-774-11	CONNECTOR, BOARD TO BOARD 32P	
CN3005	1-573-300-21	CONNECTOR, BOARD TO BOARD 18P	

<DIODE>

D0001	8-719-991-33	DIODE 1SS133T-77	
D0002	8-719-991-33	DIODE 1SS133T-77	
D0003	8-719-991-33	DIODE 1SS133T-77	
D0004	8-719-991-33	DIODE 1SS133T-77	
D0005	8-719-991-33	DIODE 1SS133T-77	
D0006	8-719-991-33	DIODE 1SS133T-77	
D0007	8-719-991-33	DIODE 1SS133T-77	
D0009	8-719-991-33	DIODE 1SS133T-77	
D0010	8-719-991-33	DIODE 1SS133T-77	
D0013	8-719-991-33	DIODE 1SS133T-77	
D0014	8-719-991-33	DIODE 1SS133T-77	
D0015	8-719-991-33	DIODE 1SS133T-77	
D0016	8-719-991-33	DIODE 1SS133T-77	
D0017	8-719-991-33	DIODE 1SS133T-77	
D0018	8-719-991-33	DIODE 1SS133T-77	
D0019	8-719-991-33	DIODE 1SS133T-77	
D3005	8-719-121-24	DIODE RD9.1ESL	
D3006	8-719-109-86	DIODE RD5.1ESB3	
D3008	8-719-110-22	DIODE RD11ESB2	
D3009	8-719-991-33	DIODE 1SS133T-77	
D3010	8-719-121-24	DIODE RD9.1ESL	
D3012	8-719-991-33	DIODE 1SS133T-77	
D3013	8-719-109-88	DIODE RD5.6ESB1	
D3014	8-719-991-33	DIODE 1SS133T-77	
D3015	8-719-991-33	DIODE 1SS133T-77	
D3016	8-719-991-33	DIODE 1SS133T-77	
D3017	8-719-110-22	DIODE RD11ESB2	
D3019	8-719-991-33	DIODE 1SS133T-77	
D3020	8-719-991-33	DIODE 1SS133T-77	
D3021	8-719-991-33	DIODE 1SS133T-77	
D3022	8-719-991-33	DIODE 1SS133T-77	
D3023	8-719-991-33	DIODE 1SS133T-77	
D3024	8-719-991-33	DIODE 1SS133T-77	
D3025	8-719-109-86	DIODE RD5.1ESB3	
D3027	8-719-110-22	DIODE RD11ESB2	
D3028	8-719-991-33	DIODE 1SS133T-77	
D3029	8-719-991-33	DIODE 1SS133T-77	
D3030	8-719-991-33	DIODE 1SS133T-77	
D3031	8-719-991-33	DIODE 1SS133T-77	
D3032	8-719-991-33	DIODE 1SS133T-77	
D3033	8-719-991-33	DIODE 1SS133T-77	
D3034	8-719-991-33	DIODE 1SS133T-77	
D3035	8-719-991-33	DIODE 1SS133T-77	
D3036	8-719-991-33	DIODE 1SS133T-77	
D3037	8-719-991-33	DIODE 1SS133T-77	
D3038	8-719-991-33	DIODE 1SS133T-77	
D3042	8-719-991-33	DIODE 1SS133T-77	

<IC>

IC0001	8-752-863-95	IC CXP85324A-039S	
IC0002	8-759-603-37	IC M5216P	
IC0004	8-759-280-74	IC ST24C02CB1	

REF. NO.	PART NO.	DESCRIPTION	REMARK
IC0005	8-759-112-06	IC μPC78N05H	
IC0006	8-759-403-44	IC MN1280-S	

IC3003	8-752-063-50	IC CXA1477AS	
IC3005	8-759-054-12	IC PQ09RA1	
IC3006	8-759-981-61	IC LM2901M	
IC3007	8-759-701-01	IC NJM2904M	

<COIL>

L0001	1-408-414-00	INDUCTOR 27μH	
L0007	1-410-470-11	INDUCTOR 10μH	
L3001	1-408-413-00	INDUCTOR 22μH	
L3002	1-412-531-31	INDUCTOR 33μH	

<TRANSISTOR>

Q0001	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0002	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0003	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0004	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0005	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0006	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0007	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0008	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0009	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0010	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0011	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0012	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0013	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0014	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0015	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0016	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0017	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0018	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0022	8-729-216-22	TRANSISTOR 2SA1162-G	
Q0023	8-729-901-87	TRANSISTOR 2SC2411K-CQ	
Q0024	8-729-901-87	TRANSISTOR 2SC2411K-CQ	
Q0025	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0026	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q0027	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3001	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3002	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3003	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3004	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3005	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3006	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3007	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3008	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3009	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3010	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3011	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3012	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3014	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3025	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3028	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3029	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3030	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3031	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3032	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q3033	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3034	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3035	8-729-216-22	TRANSISTOR 2SA1162-G	
Q3036	8-729-422-27	TRANSISTOR 2SD601A-Q	

<RESISTOR>

R0001	1-247-815-91	CARBON 220	5%	1/4W
R0002	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R0003	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W

M

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R0004	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R0074	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R0005	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R0075	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R0006	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R0076	1-216-295-91	CONDUCTOR, CHIP	
R0007	1-216-093-00	METAL GLAZE 68K	5% 1/10W	R0077	1-216-295-91	CONDUCTOR, CHIP	
R0008	1-216-089-91	METAL GLAZE 47K	5% 1/10W	R0079	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R0009	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R0080	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R0010	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R0082	1-216-295-91	CONDUCTOR, CHIP	
R0011	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R0083	1-216-041-00	METAL GLAZE 470	5% 1/10W
R0012	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R0086	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R0013	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R0088	1-216-037-00	METAL GLAZE 330	5% 1/10W
R0014	1-216-097-91	METAL GLAZE 100K	5% 1/10W	R0089	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R0015	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R0090	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R0016	1-216-089-91	METAL GLAZE 47K	5% 1/10W	R0092	1-216-295-91	CONDUCTOR, CHIP	
R0017	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R0093	1-216-037-00	METAL GLAZE 330	5% 1/10W
R0018	1-216-081-00	METAL GLAZE 22K	5% 1/10W	R0094	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R0019	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0095	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R0019	1-217-905-11	METAL GLAZE 1.5	5% 1/10W	R0097	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R0020	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0098	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R0021	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0100	1-216-295-91	CONDUCTOR, CHIP	
R0022	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R0101	1-216-037-00	METAL GLAZE 330	5% 1/10W
R0023	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R0103	1-216-422-11	METAL OXIDE 18	5% 1W F
R0024	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0104	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R0025	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0106	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R0026	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0107	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R0027	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0108	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R0028	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0110	1-216-025-91	METAL GLAZE 100	5% 1/10W
R0029	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R0111	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R0030	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0112	1-216-025-91	METAL GLAZE 100	5% 1/10W
R0031	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0113	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R0032	1-216-081-00	METAL GLAZE 22K	5% 1/10W	R0114	1-216-295-91	CONDUCTOR, CHIP	
R0033	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0115	1-216-295-91	CONDUCTOR, CHIP	
R0035	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0117	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R0036	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0120	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R0037	1-216-041-00	METAL GLAZE 470	5% 1/10W	R0121	1-216-033-00	METAL GLAZE 220	5% 1/10W
R0038	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0122	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R0039	1-216-023-00	METAL GLAZE 82	5% 1/10W	R0123	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R0040	1-216-097-91	METAL GLAZE 100K	5% 1/10W	R0124	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R0041	1-216-089-91	METAL GLAZE 47K	5% 1/10W	R0126	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R0042	1-216-089-91	METAL GLAZE 47K	5% 1/10W	R0127	1-216-025-91	METAL GLAZE 100	5% 1/10W
R0043	1-216-097-91	METAL GLAZE 100K	5% 1/10W	R0128	1-216-295-91	CONDUCTOR, CHIP	
R0044	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0131	1-216-083-00	METAL GLAZE 27K	5% 1/10W
R0045	1-216-295-91	CONDUCTOR, CHIP		R0132	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R0046	1-216-041-00	METAL GLAZE 470	5% 1/10W	R0135	1-216-295-91	CONDUCTOR, CHIP	
R0047	1-216-041-00	METAL GLAZE 470	5% 1/10W	R0136	1-216-427-00	METAL OXIDE 120	5% 1W F
R0048	1-216-041-00	METAL GLAZE 470	5% 1/10W	R0137	1-216-426-71	METAL OXIDE 82	5% 1W F
R0049	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0138	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R0050	1-216-033-00	METAL GLAZE 220	5% 1/10W	R0139	1-217-905-11	METAL GLAZE 1.5	5% 1/10W
R0051	1-216-033-00	METAL GLAZE 220	5% 1/10W	R3001	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R0052	1-216-033-00	METAL GLAZE 220	5% 1/10W	R3002	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R0053	1-216-033-00	METAL GLAZE 220	5% 1/10W	R3003	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R0054	1-216-033-00	METAL GLAZE 220	5% 1/10W	R3004	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R0055	1-216-033-00	METAL GLAZE 220	5% 1/10W	R3005	1-216-059-00	METAL GLAZE 2.7K	5% 1/10W
R0056	1-216-033-00	METAL GLAZE 220	5% 1/10W	R3006	1-216-025-91	METAL GLAZE 100	5% 1/10W
R0057	1-216-033-00	METAL GLAZE 220	5% 1/10W	R3007	1-216-033-00	METAL GLAZE 220	5% 1/10W
R0058	1-216-033-00	METAL GLAZE 220	5% 1/10W	R3008	1-216-033-00	METAL GLAZE 220	5% 1/10W
R0060	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R3009	1-216-033-00	METAL GLAZE 220	5% 1/10W
R0061	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R3010	1-216-025-91	METAL GLAZE 100	5% 1/10W
R0062	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R3011	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R0064	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R3012	1-216-025-91	METAL GLAZE 100	5% 1/10W
R0065	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R3014	1-216-059-00	METAL GLAZE 2.7K	5% 1/10W
R0066	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R3015	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R0067	1-216-295-91	CONDUCTOR, CHIP		R3016	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R0068	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R3017	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R0069	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R3018	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R0070	1-216-295-91	CONDUCTOR, CHIP		R3019	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R0071	1-216-295-91	CONDUCTOR, CHIP		R3020	1-216-085-00	METAL GLAZE 33K	5% 1/10W
R0072	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R3022	1-247-815-91	CARBON 220	5% 1/4W
R0073	1-216-295-91	CONDUCTOR, CHIP		R3023	1-216-049-91	METAL GLAZE 1K	5% 1/10W
				R3024	1-216-041-00	METAL GLAZE 470	5% 1/10W

G

Les composants identifiés par
une trame et une marque Δ
sont critiques pour la sécurité.
Ne les remplacer que par une
pièce portant le numéro spécifié.

The components identified by
shading and mark Δ are critical
for safety.
Replace only with part number
specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK
C635	1-126-942-61	ELECT 1000 μ F 20% 25V	
C636	1-126-768-11	ELECT 2200 μ F 20% 16V	
C637	1-126-927-11	ELECT 2200 μ F 20% 10V	
C638	1-126-948-11	ELECT 100 μ F 20% 35V	
C639	1-110-626-11	ELECT 330 μ F 20% 160V	
C640	1-104-665-11	ELECT 100 μ F 20% 25V	
C641	1-104-665-11	ELECT 100 μ F 20% 25V	
C642	1-104-664-11	ELECT 47 μ F 20% 25V	
C643	1-104-664-11	ELECT 47 μ F 20% 25V	
C645	1-104-665-11	ELECT 100 μ F 20% 25V	
C646	1-126-940-11	ELECT 330 μ F 20% 16V	
C647	1-126-964-11	ELECT 10 μ F 20% 50V	
C648	1-126-964-11	ELECT 10 μ F 20% 50V	
C654	1-164-232-11	CERAMIC CHIP 0.01 μ F 10% 50V	
C655	1-162-318-11	CERAMIC 0.001 μ F 10% 500V	
C657	1-124-925-11	ELECT 2.2 μ F 20% 50V	
C661	1-104-664-11	ELECT 47 μ F 20% 25V	
C674	1-104-665-11	ELECT 100 μ F 20% 25V	
C675	1-107-698-11	ELECT 10 μ F 20% 25V	
C676	1-164-505-11	CERAMIC CHIP 2.2 μ F 16V	
C677	1-126-941-11	ELECT 470 μ F 20% 25V	
C678	1-104-664-11	ELECT 47 μ F 20% 25V	
C679	1-104-664-11	ELECT 47 μ F 20% 25V	
C682	1-104-664-11	ELECT 47 μ F 20% 25V	
C683	1-104-664-11	ELECT 47 μ F 20% 25V	
C690	1-126-964-11	ELECT 10 μ F 20% 50V	
C691	1-126-964-11	ELECT 10 μ F 20% 50V	
C692	1-126-964-11	ELECT 10 μ F 20% 50V	
C693	1-107-635-11	ELECT 4.7 μ F 20% 160V	
C694	1-126-934-11	ELECT 220 μ F 20% 16V	
C695	1-126-964-11	ELECT 10 μ F 20% 50V	
C696	1-126-964-11	ELECT 10 μ F 20% 50V	
C697	1-124-925-11	ELECT 2.2 μ F 20% 50V	
<CONNECTOR>			
CN601	*1-580-843-11	PIN, CONNECTOR (POWER)	
CN602	*1-573-963-11	PIN, CONNECTOR (PC BOARD) 3P	
CN603	*1-573-963-11	PIN, CONNECTOR (PC BOARD) 3P	
CN604	1-508-784-00	PIN, CONNECTOR (5mm PITCH) 1P	
CN690	*1-564-509-11	PLUG, CONNECTOR 6P	
CN691	1-770-832-11	CONNECTOR, BOARD TO BOARD 6P	
CN692	*1-508-765-00	PIN, CONNECTOR (5mm PITCH) 3P	
CN693	1-770-832-11	CONNECTOR, BOARD TO BOARD 6P	
CN695	1-508-784-00	PIN, CONNECTOR (5mm PITCH) 1P	
<DIODE>			
D601	8-719-510-53	DIODE D4SB60L	
D602	8-719-911-19	DIODE 1SS119-25	
D603	8-719-911-19	DIODE 1SS119-25	
D604	8-719-911-19	DIODE 1SS119-25	
D605	8-719-911-19	DIODE 1SS119-25	
D606	8-719-911-19	DIODE 1SS119-25	
D607	8-719-911-19	DIODE 1SS119-25	
D608	8-719-911-19	DIODE 1SS119-25	
D609	8-719-911-19	DIODE 1SS119-25	
D631	8-719-052-92	DIODE D10SBS4F	
D632	8-719-022-97	DIODE D2S4MF	
D633	8-719-510-12	DIODE D10SC4M	
D634	8-719-022-97	DIODE D2S4MF	
D635	8-719-052-86	DIODE D2L40-TA	
D636	8-719-052-86	DIODE D2L40-TA	
D637	8-719-510-26	DIODE D1NL20	
D638	8-719-510-02	DIODE D1NS4	
D645	8-719-991-33	DIODE 1SS133T-77	
D646	8-719-110-49	DIODE RD18ESB2	
D657	8-719-110-57	DIODE RD22ESB2	
D658	8-719-991-33	DIODE 1SS133T-77	

REF. NO.	PART NO.	DESCRIPTION	REMARK
D661	8-719-109-81	DIODE RD4.7ESB2	
D662	8-719-110-31	DIODE RD12ESB2	
D663	8-719-991-33	DIODE 1SS133T-77	
D667	8-719-991-33	DIODE 1SS133T-77	
D671	8-719-110-08	DIODE RD8.2ESB2	
D673	8-719-200-82	DIODE 11ES2	
D674	8-719-200-82	DIODE 11ES2	
D675	8-719-200-82	DIODE 11ES2	
D676	8-719-200-82	DIODE 11ES2	
D677	8-719-991-33	DIODE 1SS133T-77	
D679	8-719-991-33	DIODE 1SS133T-77	
D680	8-719-110-17	DIODE RD10ESB2	
D681	8-719-991-33	DIODE 1SS133T-77	
D682	8-719-991-33	DIODE 1SS133T-77	
D687	8-719-991-33	DIODE 1SS133T-77	
D688	8-719-110-31	DIODE RD12ESB2	
D689	8-719-991-33	DIODE 1SS133T-77	
D690	8-719-991-33	DIODE 1SS133T-77	
<FUSE>			
F601	Δ 1-576-193-11	FUSE (6.3A/125V)	
	1-533-223-11	HOLDER, FUSE; F601	
<FERRITE BEAD>			
FB631	1-410-397-21	FERRITE BEAD INDUCTOR 1.1 μ H	
FB632	1-410-397-21	FERRITE BEAD INDUCTOR 1.1 μ H	
FB633	1-410-396-41	FERRITE BEAD INDUCTOR 0.45 μ H	
FB634	1-410-396-41	FERRITE BEAD INDUCTOR 0.45 μ H	
FB635	1-410-396-41	FERRITE BEAD INDUCTOR 0.45 μ H	
FB636	1-410-396-41	FERRITE BEAD INDUCTOR 0.45 μ H	
FB637	1-410-396-41	FERRITE BEAD INDUCTOR 0.45 μ H	
<IC>			
IC620	Δ 1-810-477-11	POWER MODULE (DM-48)	
IC676	8-759-231-58	IC TA7812S	
IC690	8-759-231-58	IC TA7812S	
IC691	8-749-920-58	IC SI-3090CA	
IC692	8-759-231-53	IC TA7805S	
IC693	8-759-929-64	IC LM7905CT	
<COIL>			
L631	1-412-519-11	INDUCTOR 3.3 μ H	
L632	1-412-519-11	INDUCTOR 3.3 μ H	
L634	1-403-588-11	CIL, CHOKE 22 μ H	
L690	1-403-588-11	CIL, CHOKE 22 μ H	
<TRANSISTOR>			
Q601	8-729-019-49	TRANSISTOR 2SC4834M	
Q602	8-729-019-49	TRANSISTOR 2SC4834M	
Q645	8-729-105-08	TRANSISTOR 2SA1330-O6	
Q657	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q658	8-729-230-45	TRANSISTOR 2SC2458-YGR	
Q667	8-729-216-22	TRANSISTOR 2SA1162-G	
Q668	8-729-216-22	TRANSISTOR 2SA1162-G	
Q675	8-729-216-22	TRANSISTOR 2SA1162-G	
Q676	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q677	8-729-216-22	TRANSISTOR 2SA1162-G	
Q678	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q679	8-729-216-22	TRANSISTOR 2SA1162-G	
Q680	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q682	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q683	8-729-216-22	TRANSISTOR 2SA1162-G	
Q684	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q687	8-729-216-22	TRANSISTOR 2SA1162-G	

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.



REF. NO.	PART NO.	DESCRIPTION	REMARK
Q688	8-729-216-22	TRANSISTOR 2SA1162-G	
Q689	8-729-216-22	TRANSISTOR 2SA1162-G	
Q690	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q691	8-729-422-27	TRANSISTOR 2SD601A-Q	

<RESISTOR>

R601	Δ 1-219-512-91	RESISTOR(SURGE RESISTANT) 2.2M	
R602	Δ 1-205-997-11	WIREWOUND 2.2	5% 10W
R603	1-247-891-00	CARBON 330K	5% 1/4W
R604	1-247-891-00	CARBON 330K	5% 1/4W
R605	1-202-933-61	FUSIBLE 0.1	10% 1/2W F
R606	1-247-887-00	CARBON 220K	5% 1/4W
R607	1-247-887-00	CARBON 220K	5% 1/4W
R608	1-216-353-00	METAL OXIDE 2.2	5% 1W F
R609	1-247-887-00	CARBON 220K	5% 1/4W
R610	1-247-887-00	CARBON 220K	5% 1/4W
R611	1-216-353-00	METAL OXIDE 2.2	5% 1W F
R612	1-247-791-91	CARBON 22	5% 1/4W
R613	1-247-791-91	CARBON 22	5% 1/4W
R614	1-247-791-91	CARBON 22	5% 1/4W
R615	1-247-791-91	CARBON 22	5% 1/4W
R632	1-249-387-11	CARBON 3.3	5% 1/4W F
R633	1-249-383-11	CARBON 1.5	5% 1/4W F
R638	1-216-041-00	METAL GLAZE 470	5% 1/10W
R639	1-216-041-00	METAL GLAZE 470	5% 1/10W
R640	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R641	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R642	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R643	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R644	1-249-423-11	CARBON 3.3K	5% 1/4W
R645	1-216-650-11	METAL CHIP 910	0.50% 1/10W
R646	1-218-760-11	METAL CHIP 220K	0.50% 1/10W
R647	1-216-097-91	METAL GLAZE 100K	5% 1/10W F
R648	1-216-365-00	METAL OXIDE 0.47	5% 2W
R649	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R650	1-247-895-91	CARBON 470K	5% 1/4W
R651	1-249-413-11	CARBON 470	5% 1/4W F
R652	1-218-754-11	METAL CHIP 120K	0.50% 1/10W
R653	1-215-451-00	METAL 18K	1% 1/4W
R654	1-216-041-00	METAL GLAZE 470	5% 1/10W
R655	1-216-113-00	METAL GLAZE 470K	5% 1/10W
R656	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R657	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R659	1-216-025-91	METAL GLAZE 100	5% 1/10W
R660	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R661	1-249-425-11	CARBON 4.7K	5% 1/4W
R662	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R664	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R665	1-216-021-00	METAL GLAZE 68	5% 1/10W
R666	1-216-021-00	METAL GLAZE 68	5% 1/10W
R667	1-216-093-00	METAL GLAZE 68K	5% 1/10W
R668	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R669	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R671	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R673	1-249-425-11	CARBON 4.7K	5% 1/4W
R674	1-247-737-11	CARBON 68	5% 1/2W F
R675	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R676	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R677	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R679	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R680	1-249-439-11	CARBON 68K	5% 1/4W
R682	1-249-421-11	CARBON 2.2K	5% 1/4W
R683	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R684	1-249-417-11	CARBON 1K	5% 1/4W F
R685	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R686	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R687	1-216-073-00	METAL GLAZE 10K	5% 1/10W

REF. NO.	PART NO.	DESCRIPTION	REMARK
R688	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R689	1-249-413-11	CARBON 470	5% 1/4W
R690	1-216-377-11	METAL OXIDE 4.7	5% 2W F
R691	1-216-377-11	METAL OXIDE 4.7	5% 2W F
R692	1-260-288-11	CARBON 0.47	5% 1/2W
R695	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R696	1-249-389-11	CARBON 4.7	5% 1/4W F

<RELAY>

RY601	Δ 1-755-018-11	RELAY
RY602	Δ 1-755-119-11	RELAY

<TRANSFORMER>

T601	Δ 1-424-220-11	TRANSFORMER, LINE FILTER
T602	Δ 1-424-220-11	TRANSFORMER, LINE FILTER
T603	Δ 1-429-201-11	TRANSFORMER, CONVERTER (PIT)
T604	Δ 1-427-864-11	TRANSFORMER, CONVERTER (PRT)
T605	Δ 1-448-916-11	TRANSFORMER, POWER

<THERMISTOR>

THP601	Δ 1-809-539-11	THERMISTOR, POSITIVE
--------	-----------------------	----------------------

* A-1331-450-A C BOARD, COMPLETE

<CAPACITOR>

C701	1-137-490-11	FILM	0.01 μ F	10%	1KV
C702	1-107-651-11	ELECT	4.7 μ F	20%	250V
C703	1-106-375-12	MYLAR	0.022 μ F		200V
C704	1-106-375-12	MYLAR	0.022 μ F		200V
C705	1-162-116-00	CERAMIC	680PF	10%	2KV
C707	1-102-074-00	CERAMIC	0.001 μ F	10%	50V
C708	1-126-772-11	ELECT	1 μ F	20%	250V
C709	1-126-772-11	ELECT	1 μ F	20%	250V
C710	1-126-772-11	ELECT	1 μ F	20%	250V
C711	1-102-157-00	CERAMIC	560PF	10%	500V
C712	1-102-157-00	CERAMIC	560PF	10%	500V
C713	1-102-157-00	CERAMIC	560PF	10%	500V
C714	1-102-129-00	CERAMIC	0.01 μ F	10%	50V
C715	1-102-129-00	CERAMIC	0.01 μ F	10%	50V
C716	1-102-129-00	CERAMIC	0.01 μ F	10%	50V
C717	1-124-903-11	ELECT	1 μ F	20%	50V
C718	1-102-129-00	CERAMIC	0.01 μ F	10%	50V
C719	1-102-959-00	CERAMIC	22PF	5%	50V
C720	1-102-959-00	CERAMIC	22PF	5%	50V
C721	1-102-951-00	CERAMIC	15PF	5%	50V
C722	1-126-967-11	ELECT	47 μ F	20%	16V
C723	1-126-967-11	ELECT	47 μ F	20%	16V
C725	1-107-651-11	ELECT	4.7 μ F	20%	250V

<CONNECTOR>

CN701	1-695-915-11	TAB (CONTACT)
CN702	* 1-508-766-00	PIN, CONNECTOR (5mm PITCH) 4P
CN703	1-564-510-11	PLUG, CONNECTOR 7P
CN705	1-695-915-11	TAB (CONTACT)

<DIODE>

D701	8-719-908-03	DIODE GP08D
D702	8-719-901-83	DIODE 1SS83
D703	8-719-901-83	DIODE 1SS83

C

V

Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK
D704	8-719-901-83	DIODE 1SS83	
D705	8-719-991-33	DIODE 1SS133T-77	
D706	8-719-109-71	DIODE RD3.9ESB1	
D707	8-719-110-39	DIODE RD15ESB1	
D708	8-719-991-33	DIODE 1SS133T-77	
D709	8-719-991-33	DIODE 1SS133T-77	
D710	8-719-991-33	DIODE 1SS133T-77	
D712	8-719-991-33	DIODE 1SS133T-77	
D713	8-719-109-84	DIODE RD5.1ESB1	
<IC>			
IC701	8-759-346-42	IC TDA6101Q/N3	
IC702	8-759-346-42	IC TDA6101Q/N3	
IC703	8-759-346-42	IC TDA6101Q/N3	
<JACK>			
J701	Δ 1-540-223-11	SOCKET, PICTURE TUBE	
<COIL>			
L701	1-410-667-31	INDUCTOR 22 μ H	
<TRANSISTOR>			
Q701	8-729-119-76	TRANSISTOR 2SA1175-HFE	
<RESISTOR>			
R701	1-260-133-11	CARBON 680K 5% 1/2W	
R702	1-260-123-11	CARBON 100K 5% 1/2W	
R703	1-260-115-11	CARBON 22K 5% 1/2W	
R704	1-216-366-00	METAL OXIDE 0.56 5% 2W	F
R707	1-260-132-11	CARBON 560K 5% 1/2W	
R709	1-260-087-11	CARBON 100 5% 1/2W	
R710	1-249-421-11	CARBON 2.2K 5% 1/4W	
R711	1-260-101-11	CARBON 1.5K 5% 1/2W	
R712	1-260-101-11	CARBON 1.5K 5% 1/2W	
R713	1-260-101-11	CARBON 1.5K 5% 1/2W	
R714	1-215-903-11	METAL OXIDE 68K 5% 2W	F
R715	1-215-903-11	METAL OXIDE 68K 5% 2W	F
R716	1-215-903-11	METAL OXIDE 68K 5% 2W	F
R717	1-249-422-11	CARBON 2.7K 5% 1/4W	
R718	1-249-422-11	CARBON 2.7K 5% 1/4W	
R719	1-249-422-11	CARBON 2.7K 5% 1/4W	
R720	1-249-418-11	CARBON 1.2K 5% 1/4W	
R721	1-249-418-11	CARBON 1.2K 5% 1/4W	
R722	1-215-424-00	METAL 1.3K 1% 1/4W	
R723	1-249-441-11	CARBON 100K 5% 1/4W	
R724	1-247-863-91	CARBON 22K 5% 1/4W	
R725	1-249-432-11	CARBON 18K 5% 1/4W	
R726	1-249-436-11	CARBON 39K 5% 1/4W	
R727	1-215-414-00	METAL 510 1% 1/4W	
R728	1-215-413-00	METAL 470 1% 1/4W	
R729	1-249-437-11	CARBON 47K 5% 1/4W	
R730	1-247-807-31	CARBON 100 5% 1/4W	
R731	1-249-417-11	CARBON 1K 5% 1/4W	
<VARIABLE RESISTOR>			
RV701	1-241-714-11	RES, ADJ, METAL FILM 110M	
RV702	1-230-641-11	RES, ADJ, METAL GLAZE 2.2M	

REF. NO.	PART NO.	DESCRIPTION	REMARK

	4-382-854-11	SCREW (M3X10), P, SW (+)	
<CAPACITOR>			
C1951	1-102-074-00	CERAMIC 0.001 μ F 10% 50V	
C1952	1-102-106-00	CERAMIC 100PF 10% 50V	
C1961	1-161-830-00	CERAMIC 0.0047 μ F 500V	
C1962	1-102-951-00	CERAMIC 15PF 5% 50V	
C1963	1-107-638-11	ELECT 33 μ F 20% 160V	
C1964	1-126-933-11	ELECT 100 μ F 20% 16V	
C1968	1-106-383-00	MYLAR 0.047 μ F 10% 200V	
C1969	1-107-667-11	ELECT 2.2 μ F 20% 160V	
C1970	1-106-391-12	MYLAR 0.1 μ F 10% 200V	
C1971	1-126-964-11	ELECT 10 μ F 20% 50V	
C1972	1-126-940-11	ELECT 330 μ F 20% 16V	
C1973	1-106-383-00	MYLAR 0.047 μ F 10% 200V	
C1974	1-102-959-00	CERAMIC 22PF 5% 50V	
C1975	1-126-933-11	ELECT 100 μ F 20% 16V	
C1976	1-126-964-11	ELECT 10 μ F 20% 50V	
C1977	1-102-963-00	CERAMIC 33PF 5% 50V	
C1978	1-106-343-00	MYLAR 0.001 μ F 10% 100V	
C1979	1-106-343-00	MYLAR 0.001 μ F 10% 100V	
C1980	1-126-964-11	ELECT 10 μ F 20% 50V	
<CONNECTOR>			
CN1951	* 1-564-511-11	PLUG, CONNECTOR 8P	
<DIODE>			
D1961	8-719-991-33	DIODE 1SS133T-77	
D1963	8-719-991-33	DIODE 1SS133T-77	
D1964	8-719-991-33	DIODE 1SS133T-77	
D1965	8-719-991-33	DIODE 1SS133T-77	
D1966	8-719-991-33	DIODE 1SS133T-77	
D1967	8-719-110-88	DIODE RD39ESB2	
D1968	8-719-110-88	DIODE RD39ESB2	
<COIL>			
L1962	1-408-416-00	INDUCTOR 39 μ H	
<TRANSISTOR>			
Q1956	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q1961	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q1962	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q1963	8-729-017-05	TRANSISTOR 2SA1837	
Q1964	8-729-119-78	TRANSISTOR 2SC2785 HFE	
Q1965	8-729-017-06	TRANSISTOR 2SC4793	
Q1966	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q1967	8-729-140-96	TRANSISTOR 2SD774-34	
<RESISTOR>			
R1951	1-249-434-11	CARBON 27K 5% 1/4W	
R1952	1-249-429-11	CARBON 10K 5% 1/4W	
R1953	1-249-429-11	CARBON 10K 5% 1/4W	
R1954	1-247-903-00	CARBON 1M 5% 1/4W	
R1955	1-249-421-11	CARBON 2.2K 5% 1/4W	
R1962	1-247-815-91	CARBON 220 5% 1/4W	
R1963	1-249-419-11	CARBON 1.5K 5% 1/4W	
R1964	1-247-734-11	CARBON 39 5% 1/2W	F
R1965	1-249-414-11	CARBON 560 5% 1/4W	F
R1966	1-249-415-11	CARBON 680 5% 1/4W	
R1968	1-249-418-11	CARBON 1.2K 5% 1/4W	
R1969	1-249-384-11	CARBON 1.8 5% 1/4W	F

* A-1342-270-A V BOARD, COMPLETE



REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R1970	1-249-435-11	CARBON 33K 5%	1/4W	C1804	1-126-967-11	ELECT 47μF 20%	16V
R1972	1-249-432-11	CARBON 18K 5%	1/4W	C1805	1-137-370-11	FILM 0.01μF 5%	50V
R1974	1-216-476-11	METAL OXIDE 180 5%	3W F	C1808	1-137-364-11	FILM 0.001μF 5%	50V
R1975	1-249-417-11	CARBON 1K 5%	1/4W F	C1809	1-137-364-11	FILM 0.001μF 5%	50V
R1976	1-249-432-11	CARBON 18K 5%	1/4W	C1810	1-136-171-00	FILM 0.33μF 5%	50V
R1977	1-249-438-11	CARBON 56K 5%	1/4W	C1811	1-136-171-00	FILM 0.33μF 5%	50V
R1978	1-249-430-11	CARBON 12K 5%	1/4W	C1813	1-136-756-11	FILM 0.24μF 5%	200V
R1979	1-249-414-11	CARBON 560 5%	1/4W	C1814	1-126-964-11	ELECT 10μF 20%	50V
R1980	1-249-420-11	CARBON 1.8K 5%	1/4W	C1817	1-104-665-11	ELECT 100μF 20%	25V
R1981	1-249-415-11	CARBON 680 5%	1/4W	C1821	1-107-889-11	ELECT 220μF 20%	16V
R1982	1-249-384-11	CARBON 1.8 5%	1/4W F	C1822	1-107-889-11	ELECT 220μF 20%	16V
R1983	1-249-441-11	CARBON 100K 5%	1/4W	C1823	1-107-908-11	ELECT 33μF 20%	50V
R1984	1-247-807-31	CARBON 100 5%	1/4W	C1824	1-107-908-11	ELECT 33μF 20%	50V
R1985	1-249-400-11	CARBON 39 5%	1/4W F	<CONNECTOR>			
R1986	1-249-435-11	CARBON 33K 5%	1/4W	CN801	* 1-691-914-11	CONNECTOR, BOARD TO BOARD 15P	
R1987	1-249-428-11	CARBON 8.2K 5%	1/4W	CN803	* 1-564-511-11	PLUG, CONNECTOR 8P	
R1988	1-249-417-11	CARBON 1K 5%	1/4W	CN804	1-508-765-00	PIN, CONNECTOR (5mm PITCH) 3P	
R1989	1-249-413-11	CARBON 470 5%	1/4W	CN1802	* 1-691-914-11	CONNECTOR, BOARD TO BOARD 15P	
R1990	1-216-451-11	METAL OXIDE 120 5%	2W F	<DIODE>			
R1991	1-249-410-11	CARBON 270 5%	1/4W	D804	8-719-991-33	DIODE 1SS133T-77	
*****				D805	8-719-801-35	THYRISTOR SHOR3D42(N)	
* A-1346-347-A D BOARD, COMPLETE				D806	8-719-980-78	DIODE ERA83-006	
*****				D807	8-719-980-78	DIODE ERA83-006	
4-382-854-11 SCREW (M3X10), P, SW (+)				D808	8-719-991-33	DIODE 1SS133T-77	
<CAPACITOR>				D809	8-719-991-33	DIODE 1SS133T-77	
C802	1-126-967-11	ELECT 47μF 20%	16V	D810	8-719-991-33	DIODE 1SS133T-77	
C804	1-137-370-11	FILM 0.01μF 5%	50V	D811	8-719-302-43	DIODE EL1Z	
C805	1-137-399-11	FILM 0.1μF 5%	50V	D812	8-719-991-33	DIODE 1SS133T-77	
C806	1-137-399-11	FILM 0.1μF 5%	50V	D816	8-719-991-33	DIODE 1SS133T-77	
C807	1-126-952-11	ELECT 1000μF 20%	16V	D901	8-719-991-33	DIODE 1SS133T-77	
C809	1-136-104-00	FILM 0.16μF 5%	200V	D903	8-719-302-43	DIODE EL1Z	
C810	1-136-177-00	FILM 1μF 5%	50V	D906	8-719-980-78	DIODE ERA83-006	
C811	1-106-343-00	MYLAR 0.001μF 10%	200V	D908	8-719-991-33	DIODE 1SS133T-77	
C812	1-126-964-11	ELECT 10μF 20%	50V	D910	8-719-109-88	DIODE RD5.6ESB1	
C813	1-137-374-11	FILM 0.047μF 5%	50V	D911	8-719-991-33	DIODE 1SS133T-77	
C814	1-126-964-11	ELECT 10μF 20%	50V	D912	8-719-991-33	DIODE 1SS133T-77	
C815	1-126-964-11	ELECT 10μF 20%	50V	D1801	8-719-109-93	DIODE RD6.2ESB2	
C816	1-128-551-11	ELECT 22μF 20%	25V	D1802	8-719-109-93	DIODE RD6.2ESB2	
C817	1-124-927-11	ELECT 4.7μF 20%	50V	D1806	8-719-991-33	DIODE 1SS133T-77	
C818	1-126-967-11	ELECT 47μF 20%	16V	D1817	8-719-987-87	DIODE ERA85-009	
C819	1-137-399-11	FILM 0.1μF 5%	50V	D1818	8-719-987-87	DIODE ERA85-009	
C820	1-126-935-11	ELECT 470μF 20%	16V	D1822	8-719-109-93	DIODE RD6.2ESB2	
C827	1-126-933-11	ELECT 100μF 20%	16V	D1823	8-719-109-89	DIODE RD5.6ESB2	
C905	1-107-929-11	ELECT 10μF 20%	50V	D1824	8-719-987-87	DIODE ERA85-009	
C906	1-107-675-11	ELECT 1μF 20%	160V	<IC>			
C910	1-136-103-00	FILM 0.1μF 5%	200V	IC802	8-752-052-88	IC CXA1526P	
C918	1-137-374-11	FILM 0.047μF 5%	50V	IC803	8-759-135-80	IC μPC358C	
C920	1-136-601-11	FILM 0.01μF 5%	630V	IC804	8-759-135-80	IC μPC358C	
C922	1-126-952-11	ELECT 1000μF 20%	16V	IC901	8-759-135-80	IC μPC358C	
C926	1-126-964-11	ELECT 10μF 20%	50V	IC902	8-759-103-93	IC μPC393C	
C930	1-137-370-11	FILM 0.01μF 5%	50V	IC903	8-759-103-93	IC μPC393C	
C931	1-102-106-00	CERAMIC 100PF 10%	50V	IC1801	8-759-231-53	IC TA7805S	
C932	1-137-370-11	FILM 0.01μF 5%	50V	IC1802	8-759-135-80	IC μPC358C	
C933	1-137-370-11	FILM 0.01μF 5%	50V	IC1803	8-759-902-21	IC SN74LS221N	
C934	1-137-364-11	FILM 0.001μF 5%	50V	<COIL>			
C935	1-137-370-11	FILM 0.01μF 5%	50V	L801	1-406-666-21	COIL, CHOKE 150μH	
C936	1-137-374-11	FILM 0.047μF 5%	50V	L803	1-406-987-21	COIL, CHOKE 4.7mH	
C937	1-137-370-11	FILM 0.01μF 5%	50V	L908	1-406-675-11	COIL, CHOKE 4.7mH	
C938	1-137-372-11	FILM 0.022μF 5%	50V	L1802	1-406-981-21	COIL, CHOKE 470μH	
C939	1-137-374-11	FILM 0.047μF 5%	50V	<TRANSISTOR>			
C940	1-126-964-11	ELECT 10μF 20%	50V				
C1801	1-126-967-11	ELECT 47μF 20%	16V				
C1803	1-126-967-11	ELECT 47μF 20%	16V				

D

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
Q802	8-729-216-22	TRANSISTOR 2SA1162-G		R840	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q803	8-729-422-27	TRANSISTOR 2SD601A-Q		R841	1-216-089-91	METAL GLAZE 47K	5% 1/10W
Q804	8-729-422-27	TRANSISTOR 2SD601A-Q		R842	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q805	8-729-140-93	TRANSISTOR 2SB733-34		R843	1-249-421-11	CARBON 2.2K	5% 1/4W
Q806	8-729-422-27	TRANSISTOR 2SD601A-Q		R844	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q807	8-729-140-93	TRANSISTOR 2SB733-34		R917	1-216-077-00	METAL GLAZE 15K	5% 1/10W
Q808	8-729-216-22	TRANSISTOR 2SA1162-G		R918	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q809	8-729-019-01	TRANSISTOR 2SD2394-EF		R919	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q810	8-729-140-96	TRANSISTOR 2SD774-34		R920	1-249-417-11	CARBON 1K	5% 1/4W F
Q811	8-729-422-27	TRANSISTOR 2SD601A-Q		R921	1-215-876-00	METAL OXIDE 15K	5% 1W F
Q906	8-729-119-80	TRANSISTOR 2SC2688-LK		R922	1-215-870-11	METAL OXIDE 1.5K	5% 1W F
Q907	8-729-119-80	TRANSISTOR 2SC2688-LK		R923	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
Q908	8-729-140-93	TRANSISTOR 2SB733-34		R924	1-249-413-11	CARBON 470	5% 1/4W
Q909	8-729-216-22	TRANSISTOR 2SA1162-G		R925	1-249-415-11	CARBON 680	5% 1/4W
Q911	8-729-422-27	TRANSISTOR 2SD601A-Q		R926	1-215-485-00	METAL 470K	1% 1/4W
Q913	8-729-931-45	TRANSISTOR IRF614		R928	1-215-485-00	METAL 470K	1% 1/4W
Q915	8-729-216-22	TRANSISTOR 2SA1162-G		R929	1-249-429-11	CARBON 10K	5% 1/4W
Q917	8-729-422-27	TRANSISTOR 2SD601A-Q		R930	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q919	8-729-422-27	TRANSISTOR 2SD601A-Q		R932	1-216-121-91	METAL GLAZE 1M	5% 1/10W
Q1801	8-729-422-27	TRANSISTOR 2SD601A-Q		R933	1-216-113-00	METAL GLAZE 470K	5% 1/10W
Q1802	8-729-216-22	TRANSISTOR 2SA1162-G		R935	1-216-676-11	METAL CHIP 11K	0.50% 1/10W
Q1803	8-729-422-27	TRANSISTOR 2SD601A-Q		R936	1-208-806-11	METAL CHIP 10K	0.50% 1/10W
Q1804	8-729-216-22	TRANSISTOR 2SA1162-G		R937	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
Q1805	8-729-422-27	TRANSISTOR 2SD601A-Q		R938	1-249-415-11	CARBON 680	5% 1/4W
Q1806	8-729-385-82	TRANSISTOR 2SB858-C		R939	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q1807	8-729-017-05	TRANSISTOR 2SA1837		R940	1-216-097-91	METAL GLAZE 100K	5% 1/10W
Q1808	8-729-017-06	TRANSISTOR 2SC4793		R941	1-249-413-11	CARBON 470	5% 1/4W
Q1809	8-729-216-22	TRANSISTOR 2SA1162-G		R956	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q1810	8-729-422-27	TRANSISTOR 2SD601A-Q		R957	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
Q1811	8-729-017-06	TRANSISTOR 2SC4793		R958	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
Q1812	8-729-422-27	TRANSISTOR 2SD601A-Q		R959	1-216-073-00	METAL GLAZE 10K	5% 1/10W
<RESISTOR>				R960	1-216-097-91	METAL GLAZE 100K	5% 1/10W
R801	1-216-033-00	METAL GLAZE 220	5% 1/10W	R963	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R802	1-216-033-00	METAL GLAZE 220	5% 1/10W	R964	1-208-806-11	METAL CHIP 10K	0.50% 1/10W
R804	1-216-109-00	METAL GLAZE 330K	5% 1/10W	R965	1-216-676-11	METAL CHIP 11K	0.50% 1/10W
R808	1-215-463-00	METAL 56K	1% 1/4W	R967	1-216-069-00	METAL GLAZE 6.8K	5% 1/10W
R809	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W	R968	1-216-093-00	METAL GLAZE 68K	5% 1/10W
R810	1-216-041-00	METAL GLAZE 470	5% 1/10W	R969	1-249-417-11	CARBON 1K	5% 1/4W
R811	1-216-083-00	METAL GLAZE 27K	5% 1/10W	R971	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R812	1-216-091-00	METAL GLAZE 56K	5% 1/10W	R972	1-216-075-00	METAL GLAZE 12K	5% 1/10W
R813	1-249-417-11	CARBON 1K	5% 1/4W	R973	1-216-117-00	METAL GLAZE 680K	5% 1/10W
R814	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R976	1-216-677-11	METAL CHIP 12K	0.50% 1/10W
R815	1-216-069-00	METAL GLAZE 6.8K	5% 1/10W	R977	1-216-671-11	METAL CHIP 6.8K	0.50% 1/10W
R816	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W	R1801	1-215-866-11	METAL OXIDE 330	5% 1W F
R817	1-216-059-00	METAL GLAZE 2.7K	5% 1/10W	R1802	1-216-105-91	METAL GLAZE 220K	5% 1/10W
R818	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R1803	1-216-696-11	METAL CHIP 75K	0.50% 1/10W
R819	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W	R1806	1-211-837-11	FUSIBLE 4.7	5% 1W F
R820	1-249-417-11	CARBON 1K	5% 1/4W	R1808	1-216-109-00	METAL GLAZE 330K	5% 1/10W
R821	1-216-379-11	METAL OXIDE 6.8	5% 2W F	R1811	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R822	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W	R1812	1-249-417-11	CARBON 1K	5% 1/4W
R824	1-249 923 11	CARBON 1K	5% 1/4W F	R1813	1-218-756-11	METAL CHIP 150K	0.50% 1/10W
R825	1-215-857-11	METAL OXIDE 10	5% 1W F	R1814	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R826	1-249-404-00	CARBON 82	5% 1/4W	R1815	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R827	1-216-438-11	METAL OXIDE 8.2K	5% 1W F	R1816	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R828	1-249-441-11	CARBON 100K	5% 1/4W	R1818	1-211-846-11	FUSIBLE 27	5% 1W F
R829	1-249-414-11	CARBON 560	5% 1/4W	R1819	1-215-913-11	METAL OXIDE 220	5% 3W F
R830	1-249-411-11	CARBON 330	5% 1/4W	R1820	1-216-689-11	METAL CHIP 39K	0.50% 1/10W
R831	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W	R1821	1-215-886-11	METAL OXIDE 100	5% 2W F
R832	1-215-864-00	METAL OXIDE 150	5% 1W F	R1822	1-249-409-11	CARBON 220	5% 1/4W F
R833	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W	R1823	1-249-397-11	CARBON 22	5% 1/4W F
R834	1-216-081-00	METAL GLAZE 22K	5% 1/10W	R1825	1-216-696-11	METAL CHIP 75K	0.50% 1/10W
R835	1-249-393-11	CARBON 10	5% 1/4W	R1828	1-215-866-11	METAL OXIDE 330	5% 1W F
R836	1-249-435-11	CARBON 33K	5% 1/4W	R1829	1-211-846-11	FUSIBLE 27	5% 1W F
R837	1-249-435-11	CARBON 33K	5% 1/4W	R1830	1-211-804-11	FUSIBLE 4.7	5% 1/2W F
R838	1-215-857-11	METAL OXIDE 10	5% 1W F	R1831	1-215-867-00	METAL OXIDE 470	5% 1W F
R839	1-249-410-11	CARBON 270	5% 1/4W	R1832	1-215-890-11	METAL OXIDE 470	5% 2W F
				R1846	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W

D

HA

HB

HC

ZA

ZB

U

REF. NO. PART NO. DESCRIPTION REMARK

<TRANSFORMER>

T1801 1-423-622-11 TRANSFORMER, FERRITE (VPOT)

* A-1372-125-A HA BOARD, COMPLETE

<CAPACITOR>

C2701	1-126-933-11	ELECT	100μF	20%	10V
C2703	1-128-057-11	ELECT	330μF	20%	6.3V

<CONNECTOR>

CN2701	* 1-564-519-11	PLUG, CONNECTOR 4P
CN2702	1-568-850-11	CONNECTOR, FFC/FPC 7P
CN2703	* 1-564-527-11	PLUG, CONNECTOR 12P

<IC>

IC2701 1-466-833-11 RAY-CATCHER BLOCK, REMOCON

<RESISTOR>

R2701	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2702	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2703	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2704	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2705	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2706	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2707	1-216-029-00	METAL GLAZE	150	5%	1/10W
R2709	1-216-005-00	METAL GLAZE	15	5%	1/10W

* A-1372-126-A HB BOARD, COMPLETE

<CAPACITOR>

C6704	1-124-903-11	ELECT	1μF	20%	50V
C6705	1-124-903-11	ELECT	1μF	20%	50V
C6706	1-165-319-11	CERAMIC CHIP	0.1μF		50V
C6707	1-165-319-11	CERAMIC CHIP	0.1μF		50V

<CONNECTOR>

CN6701	1-564-523-11	PLUG, CONNECTOR 8P
CN6702	* 1-564-510-11	PLUG, CONNECTOR 7P

<DIODE>

D6702	8-719-110-17	DIODE RD10ESB2
D6705	8-719-110-17	DIODE RD10ESB2
D6706	8-719-110-17	DIODE RD10ESB2
D6707	8-719-050-05	DIODE SLR-325VRT31
D6708	8-719-050-05	DIODE SLR-325VRT31
D6709	8-719-050-05	DIODE SLR-325VRT31
D6710	8-719-108-12	DIODE RD9.1EW
D6711	8-719-108-12	DIODE RD9.1EW
D6712	8-719-108-12	DIODE RD9.1EW

<JACK>

REF. NO. PART NO. DESCRIPTION REMARK

J6701 1-764-073-11 TERMINAL BLOCK, S 4P

<RESISTOR>

R6701	1-216-022-00	METAL GLAZE	75	5%	1/10W
R6702	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R6703	1-216-022-00	METAL GLAZE	75	5%	1/10W
R6704	1-216-022-00	METAL GLAZE	75	5%	1/10W
R6705	1-216-113-00	METAL GLAZE	470K	5%	1/10W

R6706	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R6707	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R6708	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R6709	1-216-041-00	METAL GLAZE	470	5%	1/10W
R6710	1-216-041-00	METAL GLAZE	470	5%	1/10W

R6711	1-216-033-00	METAL GLAZE	220	5%	1/10W
R6712	1-216-295-91	CONDUCTOR, CHIP			
R6713	1-216-295-91	CONDUCTOR, CHIP			
R6716	1-216-041-00	METAL GLAZE	470	5%	1/10W
R6717	1-216-295-91	CONDUCTOR, CHIP			

R6718	1-216-295-91	CONDUCTOR, CHIP
R6741	1-216-295-91	CONDUCTOR, CHIP

* A-1372-127-A HC BOARD, COMPLETE

<SWITCH>

S6731 1-572-198-11 SWITCH, KEYBOARD

* A-1390-525-A ZA BOARD, COMPLETE

<CONNECTOR>

CN001	* 1-764-819-11	CONNECTOR, BOARD TO BOARD 11P
CN002	* 1-764-819-11	CONNECTOR, BOARD TO BOARD 11P

* A-1390-526-A ZB BOARD, COMPLETE

<CONNECTOR>

CN003	* 1-764-819-11	CONNECTOR, BOARD TO BOARD 11P
CN004	* 1-764-819-11	CONNECTOR, BOARD TO BOARD 11P
CN005	* 1-564-525-11	PLUG, CONNECTOR 10P

* A-1394-665-A U BOARD, COMPLETE

<CAPACITOR>

C1100	1-101-004-00	CERAMIC	0.01μF		50V
C1101	1-128-551-11	ELECT	22μF	20%	25V

U

X

REF. NO.	PART NO.	DESCRIPTION	REMARK
C1102	1-124-903-11	ELECT	1μF 20% 50V
C1103	1-128-551-11	ELECT	22μF 20% 25V
C1104	1-124-903-11	ELECT	1μF 20% 50V
C1107	1-126-965-11	ELECT	22μF 20% 50V
C1108	1-126-967-11	ELECT	47μF 20% 16V
C1109	1-137-366-11	FILM	0.0022μF 5% 50V
C1111	1-137-366-11	FILM	0.0022μF 5% 50V
C1112	1-137-399-11	FILM	0.1μF 5% 50V
C1113	1-137-399-11	FILM	0.1μF 5% 50V
C1114	1-137-399-11	FILM	0.1μF 5% 50V
C1115	1-137-399-11	FILM	0.1μF 5% 50V
C1116	1-137-399-11	FILM	0.1μF 5% 50V
C1117	1-137-399-11	FILM	0.1μF 5% 50V
C1120	1-137-368-11	FILM	0.0047μF 5% 50V
C1121	1-137-366-11	FILM	0.0022μF 5% 50V
C1123	1-126-967-11	ELECT	47μF 20% 16V
C1124	1-126-964-11	ELECT	10μF 20% 50V
C1125	1-126-964-11	ELECT	10μF 20% 50V
C1126	1-137-368-11	FILM	0.0047μF 5% 50V
C1127	1-137-366-11	FILM	0.0022μF 5% 50V
C1130	1-126-964-11	ELECT	10μF 20% 50V
C1131	1-126-964-11	ELECT	10μF 20% 50V
C1132	1-126-964-11	ELECT	10μF 20% 50V
C1133	1-126-964-11	ELECT	10μF 20% 50V
C1134	1-126-967-11	ELECT	47μF 20% 16V
C1142	1-102-121-00	CERAMIC	0.0022μF 10% 50V
C1143	1-102-121-00	CERAMIC	0.0022μF 10% 50V
C1144	1-137-374-11	FILM	0.047μF 5% 50V
C1145	1-137-374-11	FILM	0.047μF 5% 50V
C1146	1-137-374-11	FILM	0.047μF 5% 50V
C1147	1-137-374-11	FILM	0.047μF 5% 50V
C1148	1-104-665-11	ELECT	100μF 20% 25V
C1149	1-126-965-11	ELECT	22μF 20% 50V
C1152	1-124-927-11	ELECT	4.7μF 20% 50V

<CONNECTOR>

CN1105	1-764-812-11	CONNECTOR, BOARD TO BOARD 11P
CN1108	* 1-564-506-11	PLUG, CONNECTOR 3P
CN1109	1-764-812-11	CONNECTOR, BOARD TO BOARD 11P

<DIODE>

D1102	8-719-991-33	DIODE 1SS133T-77
D1115	8-719-110-17	DIODE RD10ESB2
D1116	8-719-110-17	DIODE RD10ESB2
D1117	8-719-110-17	DIODE RD10ESB2

<IC>

IC1100	8-759-000-49	IC MC14066BCP
IC1141	8-759-264-31	IC TDA7315
IC1142	8-759-145-58	IC μPC4558C
IC1143	8-759-145-58	IC μPC4558C

<JACK>

J1100	1-750-515-11	TERMINAL BLOCK, S 3P
-------	--------------	----------------------

<TRANSISTOR>

Q1102	8-729-119-78	TRANSISTOR 2SC2785-HFE
Q1109	8-729-119-78	TRANSISTOR 2SC2785-HFE

<RESISTOR>

R1103	1-249-417-11	CARBON	1K	5%	1/4W
R1104	1-247-804-11	CARBON	75	5%	1/4W
R1105	1-247-804-11	CARBON	75	5%	1/4W

REF. NO.	PART NO.	DESCRIPTION	REMARK
R1106	1-247-804-11	CARBON	75 5% 1/4W
R1107	1-249-417-11	CARBON	1K 5% 1/4W
R1108	1-249-417-11	CARBON	1K 5% 1/4W
R1116	1-247-863-91	CARBON	22K 5% 1/4W
R1117	1-247-895-91	CARBON	470K 5% 1/4W
R1118	1-247-895-91	CARBON	470K 5% 1/4W
R1120	1-247-863-91	CARBON	22K 5% 1/4W
R1121	1-247-807-31	CARBON	100 5% 1/4W
R1122	1-249-425-11	CARBON	4.7K 5% 1/4W
R1123	1-247-807-31	CARBON	100 5% 1/4W
R1131	1-247-807-31	CARBON	100 5% 1/4W
R1132	1-247-807-31	CARBON	100 5% 1/4W
R1135	1-247-815-91	CARBON	220 5% 1/4W
R1136	1-247-815-91	CARBON	220 5% 1/4W
R1140	1-249-426-11	CARBON	5.6K 5% 1/4W
R1141	1-249-426-11	CARBON	5.6K 5% 1/4W
R1142	1-247-807-31	CARBON	100 5% 1/4W
R1148	1-249-436-11	CARBON	39K 5% 1/4W
R1149	1-249-436-11	CARBON	39K 5% 1/4W
R1152	1-249-436-11	CARBON	39K 5% 1/4W
R1160	1-247-807-31	CARBON	100 5% 1/4W
R1161	1-247-807-31	CARBON	100 5% 1/4W
R1162	1-247-807-31	CARBON	100 5% 1/4W
R1163	1-249-426-11	CARBON	5.6K 5% 1/4W
R1164	1-249-437-11	CARBON	47K 5% 1/4W
R1167	1-249-436-11	CARBON	39K 5% 1/4W
R1168	1-249-432-11	CARBON	18K 5% 1/4W
R1169	1-249-432-11	CARBON	18K 5% 1/4W
R1170	1-249-435-11	CARBON	33K 5% 1/4W
R1171	1-249-435-11	CARBON	33K 5% 1/4W
R1172	1-249-429-11	CARBON	10K 5% 1/4W
R1173	1-249-429-11	CARBON	10K 5% 1/4W

* A-1394-666-A X BOARD, COMPLETE

<CAPACITOR>

C5001	1-163-097-00	CERAMIC CHIP	15PF	5%	50V
C5002	1-126-964-11	ELECT	10μF	20%	50V
C5003	1-126-933-11	ELECT	100μF	20%	16V
C5004	1-126-967-11	ELECT	47μF	20%	16V
C5005	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5006	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5007	1-126-967-11	ELECT	47μF	20%	16V
C5008	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5009	1-126-964-11	ELECT	10μF	20%	50V
C5010	1-126-964-11	ELECT	10μF	20%	50V
C5011	1-163-017-00	CERAMIC CHIP	0.0047μF	10%	50V
C5012	1-126-967-11	ELECT	47μF	20%	16V
C5013	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5014	1-164-346-11	CERAMIC CHIP	1μF	10%	16V
C5015	1-163-017-00	CERAMIC CHIP	0.0047μF	10%	50V
C5016	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5017	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5018	1-126-967-11	ELECT	47μF	20%	16V
C5019	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5020	1-163-037-11	CERAMIC CHIP	0.022μF	10%	25V
C5022	1-126-933-11	ELECT	100μF	20%	16V
C5023	1-124-903-11	ELECT	1μF	20%	50V
C5024	1-126-964-11	ELECT	10μF	20%	50V
C5025	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5027	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5028	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V
C5029	1-164-004-11	CERAMIC CHIP	0.1μF	10%	25V



REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
C5031	1-126-967-11	ELECT 47μF	20% 16V	C5106	1-126-964-11	ELECT 10μF	20% 50V
C5032	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5107	1-126-964-11	ELECT 10μF	20% 50V
C5033	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5108	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5034	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5110	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5035	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5111	1-126-933-11	ELECT 100μF	20% 16V
C5036	1-126-967-11	ELECT 47μF	20% 16V	C5112	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5037	1-163-038-91	CERAMIC CHIP 0.1μF	25V	C5115	1-126-933-11	ELECT 100μF	20% 16V
C5038	1-164-005-11	CERAMIC CHIP 0.47μF	25V	C5116	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5039	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5118	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5040	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5119	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5041	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5120	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5042	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5121	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5043	1-126-933-11	ELECT 100μF	20% 16V	C5122	1-163-133-00	CERAMIC CHIP 470PF	5% 50V
C5044	1-126-967-11	ELECT 47μF	20% 16V	C5125	1-124-927-11	ELECT 4.7μF	20% 50V
C5045	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5135	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5046	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5136	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5047	1-124-925-11	ELECT 2.2μF	20% 50V	C5140	1-126-933-11	ELECT 100μF	20% 16V
C5048	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5141	1-126-964-11	ELECT 10μF	20% 50V
C5049	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5144	1-163-117-00	CERAMIC CHIP 100PF	5% 50V
C5051	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C5145	1-126-964-11	ELECT 10μF	20% 50V
C5052	1-163-097-00	CERAMIC CHIP 15PF	5% 50V	C6202	1-124-903-11	ELECT 1μF	20% 50V
C5053	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6204	1-126-964-11	ELECT 10μF	20% 50V
C5054	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6205	1-124-903-11	ELECT 1μF	20% 50V
C5055	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6206	1-126-964-11	ELECT 10μF	20% 50V
C5056	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6207	1-124-903-11	ELECT 1μF	20% 50V
C5057	1-163-017-00	CERAMIC CHIP 0.0047μF	10% 50V	C6209	1-124-903-11	ELECT 1μF	20% 50V
C5058	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6210	1-124-903-11	ELECT 1μF	20% 50V
C5059	1-163-117-00	CERAMIC CHIP 100PF	5% 50V	C6211	1-126-964-11	ELECT 10μF	20% 50V
C5060	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6212	1-124-903-11	ELECT 1μF	20% 50V
C5061	1-164-346-11	CERAMIC CHIP 1μF	16V	C6214	1-163-035-00	CERAMIC CHIP 0.047μF	50V
C5062	1-124-925-11	ELECT 2.2μF	20% 50V	C6215	1-124-903-11	ELECT 1μF	20% 50V
C5063	1-163-017-00	CERAMIC CHIP 0.0047μF	10% 50V	C6216	1-124-903-11	ELECT 1μF	20% 50V
C5064	1-163-117-00	CERAMIC CHIP 100PF	5% 50V	C6218	1-163-035-00	CERAMIC CHIP 0.047μF	50V
C5065	1-163-133-00	CERAMIC CHIP 470PF	5% 50V	C6219	1-124-903-11	ELECT 1μF	20% 50V
C5066	1-163-037-11	CERAMIC CHIP 0.022μF	10% 25V	C6220	1-163-035-00	CERAMIC CHIP 0.047μF	50V
C5067	1-124-903-11	ELECT 1μF	20% 50V	C6222	1-124-903-11	ELECT 1μF	20% 50V
C5068	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6223	1-163-035-00	CERAMIC CHIP 0.047μF	50V
C5069	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6224	1-124-903-11	ELECT 1μF	20% 50V
C5070	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6225	1-126-964-11	ELECT 10μF	20% 50V
C5071	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6226	1-124-903-11	ELECT 1μF	20% 50V
C5072	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6227	1-124-903-11	ELECT 1μF	20% 50V
C5073	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6228	1-124-903-11	ELECT 1μF	20% 50V
C5074	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6229	1-124-903-11	ELECT 1μF	20% 50V
C5075	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6230	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5076	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6231	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5077	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6232	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5078	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6234	1-163-125-00	CERAMIC CHIP 220PF	5% 50V
C5079	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6235	1-163-117-00	CERAMIC CHIP 100PF	5% 50V
C5080	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6236	1-163-117-00	CERAMIC CHIP 100PF	5% 50V
C5081	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6237	1-124-903-11	ELECT 1μF	20% 50V
C5083	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6238	1-124-903-11	ELECT 1μF	20% 50V
C5084	1-126-933-11	ELECT 100μF	20% 16V	C6239	1-124-903-11	ELECT 1μF	20% 50V
C5085	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6242	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5087	1-126-967-11	ELECT 47μF	20% 16V	C6243	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5088	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6244	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V
C5089	1-126-967-11	ELECT 47μF	20% 16V	C6248	1-164-695-11	CERAMIC CHIP 0.0022μF	5% 50V
C5090	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6249	1-163-133-00	CERAMIC CHIP 470PF	5% 50V
C5091	1-164-005-11	CERAMIC CHIP 0.47μF	25V	C6250	1-124-903-11	ELECT 1μF	20% 50V
C5093	1-126-967-11	ELECT 47μF	20% 16V	C6251	1-126-967-11	ELECT 47μF	20% 16V
C5094	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6252	1-163-038-91	CERAMIC CHIP 0.1μF	25V
C5095	1-126-967-11	ELECT 47μF	20% 16V	C6253	1-163-019-00	CERAMIC CHIP 0.0068μF	10% 50V
C5096	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6256	1-163-222-11	CERAMIC CHIP 5PF	0.25PF 50V
C5099	1-124-927-11	ELECT 4.7μF	20% 50V	C6257	1-163-222-11	CERAMIC CHIP 5PF	0.25PF 50V
C5100	1-126-967-11	ELECT 47μF	20% 16V	C6258	1-163-222-11	CERAMIC CHIP 5PF	0.25PF 50V
C5101	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6259	1-163-017-00	CERAMIC CHIP 0.0047μF	10% 50V
C5102	1-126-967-11	ELECT 47μF	20% 16V	C6261	1-163-017-00	CERAMIC CHIP 0.0047μF	10% 50V
C5104	1-164-232-11	CERAMIC CHIP 0.01μF	10% 50V	C6268	1-163-117-00	CERAMIC CHIP 100PF	5% 50V
C5105	1-164-004-11	CERAMIC CHIP 0.1μF	10% 25V	C6269	1-163-117-00	CERAMIC CHIP 100PF	5% 50V



REF. NO.	PART NO.	DESCRIPTION	REMARK
<FILTER BLOCK>			
CM5001	1-467-554-21	FILTER BLOCK, COMB	
<CONNECTOR>			
CN5001	* 1-564-509-11	PLUG, CONNECTOR 6P	
CN5002	* 1-774-190-11	CONNECTOR, BOARD TO BOARD	
CN5004	* 1-750-416-11	CONNECTOR, FFC/FPC 11P	
<DIODE>			
D5001	8-719-109-93	DIODE RD6.2ESB2	
D5002	8-719-109-93	DIODE RD6.2ESB2	
D5004	8-719-991-33	DIODE 1SS133T-77	
D5005	8-719-991-33	DIODE 1SS133T-77	
D5009	8-719-991-33	DIODE 1SS133T-77	
D5010	8-719-991-33	DIODE 1SS133T-77	
D5011	8-719-991-33	DIODE 1SS133T-77	
D5012	8-719-991-33	DIODE 1SS133T-77	
D5013	8-719-991-33	DIODE 1SS133T-77	
<FERRITE BEAD>			
FB5001	1-412-911-11	INDUCTOR, FERRITE BEAD	
FB5005	1-412-911-11	INDUCTOR, FERRITE BEAD	
<FILTER>			
FL5001	1-236-129-11	ENCAPSULATED COMPONENT	
FL5002	1-236-164-11	ENCAPSULATED COMPONENT	
FL5003	1-236-129-11	ENCAPSULATED COMPONENT	
FL5004	1-236-164-11	ENCAPSULATED COMPONENT	
<IC>			
IC5001	8-759-366-24	IC TDA8315T/N3A-T	
IC5002	8-759-231-55	IC TA7808S	
IC5004	8-759-067-24	IC 24C04AI/P	
IC5006	8-759-335-82	IC M5M442256AJ-8-T2	
IC5007	8-759-335-82	IC M5M442256AJ-8-T2	
IC5008	8-759-366-24	IC TDA8315T/N3A-T	
IC5010	8-759-297-81	IC MM1166XFB	
IC5011	8-759-011-65	IC MC74HC4053F	
IC5012	8-752-058-68	IC CXA1315M	
IC5014	8-759-357-39	IC SAB9075H/N2A	
IC5015	8-759-335-17	IC NJM2256M-TE2	
IC5016	8-759-011-65	IC MC74HC4053F	
IC6201	8-752-064-71	IC CXA1732M	
IC6202	8-752-058-68	IC CXA1315M	
IC6203	8-759-925-85	IC SN74HC32ANS	
IC6204	8-759-925-85	IC SN74HC32ANS	
IC6205	8-759-011-65	IC MC74HC4053F	
IC6206	8-752-053-21	IC CXA1211M	
IC6207	8-759-011-65	IC MC74HC4053F	
IC6208	8-752-053-21	IC CXA1211M	
IC6209	8-759-335-34	IC SC428519B	
IC6210	8-759-403-44	IC MN1280-S	
IC6211	8-759-008-67	IC MC14066BF	
<COIL>			
L5007	1-410-470-11	INDUCTOR 10μH	
L5008	1-410-470-11	INDUCTOR 10μH	
L5016	1-408-413-00	INDUCTOR 22μH	
L5017	1-408-413-00	INDUCTOR 22μH	
L6201	1-410-470-11	INDUCTOR 10μH	
<TRANSISTOR>			

REF. NO.	PART NO.	DESCRIPTION	REMARK
Q5001	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5002	8-729-216-22	TRANSISTOR 2SA1162-G	
Q5007	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5008	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5010	8-729-216-22	TRANSISTOR 2SA1162-G	
Q5011	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5012	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5013	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5014	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5015	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5016	8-729-216-22	TRANSISTOR 2SA1162-G	
Q5018	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5020	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5021	8-729-216-22	TRANSISTOR 2SA1162-G	
Q5022	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5025	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5028	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5029	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5030	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5031	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5032	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5033	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5034	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5036	8-729-216-22	TRANSISTOR 2SA1162-G	
Q5038	8-729-216-22	TRANSISTOR 2SA1162-G	
Q5039	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5040	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5041	8-729-216-22	TRANSISTOR 2SA1162-G	
Q5042	8-729-216-22	TRANSISTOR 2SA1162-G	
Q5051	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5053	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5060	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q5061	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6201	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6202	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6203	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6204	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6205	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6206	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6207	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6208	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6209	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6210	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6211	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6212	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6213	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6214	8-729-216-22	TRANSISTOR 2SA1162-G	
Q6215	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6216	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6217	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6218	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6219	8-729-216-22	TRANSISTOR 2SA1162-G	
Q6220	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6221	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6222	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6221	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6223	8-729-216-22	TRANSISTOR 2SA1162-G	
Q6224	8-729-216-22	TRANSISTOR 2SA1162-G	
Q6225	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6226	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6227	8-729-216-22	TRANSISTOR 2SA1162-G	
Q6228	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6229	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6230	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6231	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6232	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6233	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q6234	8-729-422-27	TRANSISTOR 2SD601A-Q	

X

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
Q6235	8-729-422-27	TRANSISTOR 2SD601A-Q		R5042	1-216-025-91	METAL GLAZE 100	5% 1/10W
Q6236	8-729-422-27	TRANSISTOR 2SD601A-Q		R5043	1-216-295-91	CONDUCTOR, CHIP	
Q6237	8-729-422-27	TRANSISTOR 2SD601A-Q		R5044	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6238	8-729-422-27	TRANSISTOR 2SD601A-Q		R5045	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q6239	8-729-422-27	TRANSISTOR 2SD601A-Q		R5050	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
Q6240	8-729-422-27	TRANSISTOR 2SD601A-Q		R5051	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6241	8-729-422-27	TRANSISTOR 2SD601A-Q		R5052	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6242	8-729-422-27	TRANSISTOR 2SD601A-Q		R5053	1-216-089-91	METAL GLAZE 47K	5% 1/10W
Q6243	8-729-422-27	TRANSISTOR 2SD601A-Q		R5055	1-216-001-00	METAL GLAZE 10	5% 1/10W
Q6244	8-729-422-27	TRANSISTOR 2SD601A-Q		R5056	1-216-025-91	METAL GLAZE 100	5% 1/10W
Q6245	8-729-422-27	TRANSISTOR 2SD601A-Q		R5057	1-216-295-91	CONDUCTOR, CHIP	
Q6246	8-729-422-27	TRANSISTOR 2SD601A-Q		R5059	1-216-295-91	CONDUCTOR, CHIP	
Q6247	8-729-216-22	TRANSISTOR 2SA1162-G		R5060	1-216-089-91	METAL GLAZE 47K	5% 1/10W
Q6248	8-729-422-27	TRANSISTOR 2SD601A-Q		R5061	1-216-073-00	METAL GLAZE 10K	5% 1/10W
Q6249	8-729-422-27	TRANSISTOR 2SD601A-Q		R5062	1-216-045-00	METAL GLAZE 680	5% 1/10W
Q6250	8-729-422-27	TRANSISTOR 2SD601A-Q		R5063	1-216-295-91	CONDUCTOR, CHIP	
Q6251	8-729-422-27	TRANSISTOR 2SD601A-Q		R5064	1-216-025-91	METAL GLAZE 100	5% 1/10W
Q6252	8-729-422-27	TRANSISTOR 2SD601A-Q		R5065	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6253	8-729-422-27	TRANSISTOR 2SD601A-Q		R5067	1-216-295-91	CONDUCTOR, CHIP	
Q6254	8-729-422-27	TRANSISTOR 2SD601A-Q		R5068	1-216-295-91	CONDUCTOR, CHIP	
Q6255	8-729-422-27	TRANSISTOR 2SD601A-Q		R5069	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6256	8-729-422-27	TRANSISTOR 2SD601A-Q		R5070	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6257	8-729-422-27	TRANSISTOR 2SD601A-Q		R5071	1-216-097-91	METAL GLAZE 100K	5% 1/10W
Q6258	8-729-422-27	TRANSISTOR 2SD601A-Q		R5072	1-216-043-91	METAL GLAZE 560	5% 1/10W
Q6259	8-729-422-27	TRANSISTOR 2SD601A-Q		R5073	1-216-295-91	CONDUCTOR, CHIP	
Q6260	8-729-422-27	TRANSISTOR 2SD601A-Q		R5074	1-216-077-00	METAL GLAZE 15K	5% 1/10W
Q6261	8-729-422-27	TRANSISTOR 2SD601A-Q		R5075	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
Q6262	8-729-216-22	TRANSISTOR 2SA1162-G		R5077	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6263	8-729-216-22	TRANSISTOR 2SA1162-G		R5078	1-216-295-91	CONDUCTOR, CHIP	
Q6264	8-729-422-27	TRANSISTOR 2SD601A-Q		R5080	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6265	8-729-422-27	TRANSISTOR 2SD601A-Q		R5081	1-216-075-00	METAL GLAZE 12K	5% 1/10W
Q6266	8-729-422-27	TRANSISTOR 2SD601A-Q		R5082	1-216-069-00	METAL GLAZE 6.8K	5% 1/10W
Q6267	8-729-422-27	TRANSISTOR 2SD601A-Q		R5083	1-216-295-91	CONDUCTOR, CHIP	
Q6268	8-729-422-27	TRANSISTOR 2SD601A-Q		R5084	1-216-295-91	CONDUCTOR, CHIP	
Q6269	8-729-422-27	TRANSISTOR 2SD601A-Q		R5085	1-216-049-91	METAL GLAZE 1K	5% 1/10W
Q6270	8-729-422-27	TRANSISTOR 2SD601A-Q		R5086	1-216-295-91	CONDUCTOR, CHIP	
<RESISTOR>				R5087	1-216-037-00	METAL GLAZE 330	5% 1/10W
R5001	1-216-025-91	METAL GLAZE 100	5% 1/10W	R5088	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R5002	1-216-025-91	METAL GLAZE 100	5% 1/10W	R5090	1-216-067-00	METAL GLAZE 5.6K	5% 1/10W
R5003	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5091	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R5004	1-216-025-91	METAL GLAZE 100	5% 1/10W	R5092	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R5005	1-216-097-91	METAL GLAZE 100K	5% 1/10W	R5093	1-216-001-00	METAL GLAZE 10	5% 1/10W
R5006	1-216-295-91	CONDUCTOR, CHIP		R5096	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R5007	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5097	1-216-025-91	METAL GLAZE 100	5% 1/10W
R5008	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5098	1-216-295-91	CONDUCTOR, CHIP	
R5009	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5104	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R5011	1-216-075-00	METAL GLAZE 12K	5% 1/10W	R5106	1-216-086-00	METAL GLAZE 36K	5% 1/10W
R5012	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5107	1-216-295-91	CONDUCTOR, CHIP	
R5013	1-216-295-91	CONDUCTOR, CHIP		R5109	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R5014	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5110	1-216-295-91	CONDUCTOR, CHIP	
R5017	1-216-025-91	METAL GLAZE 100	5% 1/10W	R5111	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R5018	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5112	1 216 049 91	METAL GLAZE 1K	5% 1/10W
R5021	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5113	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R5022	1-216-025-91	METAL GLAZE 100	5% 1/10W	R5115	1-216-117-00	METAL GLAZE 680K	5% 1/10W
R5024	1-216-295-91	CONDUCTOR, CHIP		R5116	1-216-295-91	CONDUCTOR, CHIP	
R5027	1-216-025-91	METAL GLAZE 100	5% 1/10W	R5117	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R5028	1-216-117-00	METAL GLAZE 680K	5% 1/10W	R5118	1-216-089-91	METAL GLAZE 47K	5% 1/10W
R5029	1-216-295-91	CONDUCTOR, CHIP		R5119	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R5031	1-216-081-00	METAL GLAZE 22K	5% 1/10W	R5120	1-216-077-00	METAL GLAZE 15K	5% 1/10W
R5032	1-216-081-00	METAL GLAZE 22K	5% 1/10W	R5121	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R5033	1-216-045-00	METAL GLAZE 680	5% 1/10W	R5123	1-216-295-91	CONDUCTOR, CHIP	
R5034	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R5124	1-216-001-00	METAL GLAZE 10	5% 1/10W
R5035	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R5128	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R5036	1-216-049-91	METAL GLAZE 1K	5% 1/10W	R5129	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R5038	1-216-001-00	METAL GLAZE 10	5% 1/10W	R5130	1-216-025-91	METAL GLAZE 100	5% 1/10W
R5040	1-216-025-91	METAL GLAZE 100	5% 1/10W	R5131	1-216-063-91	METAL GLAZE 3.9K	5% 1/10W
R5041	1-216-073-00	METAL GLAZE 10K	5% 1/10W	R5132	1-216-001-00	METAL GLAZE 10	5% 1/10W
				R5133	1-216-001-00	METAL GLAZE 10	5% 1/10W



REF. NO.	PART NO.	DESCRIPTION		REMARK	REF. NO.	PART NO.	DESCRIPTION		REMARK
R5134	1-216-001-00	METAL GLAZE 10	5%	1/10W	R5225	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W
R5135	1-216-025-91	METAL GLAZE 100	5%	1/10W	R5226	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W
R5136	1-216-001-00	METAL GLAZE 10	5%	1/10W	R5227	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W
R5137	1-216-001-00	METAL GLAZE 10	5%	1/10W	R5228	1-216-041-00	METAL GLAZE 470	5%	1/10W
R5138	1-216-295-91	CONDUCTOR, CHIP			R5229	1-216-041-00	METAL GLAZE 470	5%	1/10W
R5139	1-216-001-00	METAL GLAZE 10	5%	1/10W	R5230	1-216-041-00	METAL GLAZE 470	5%	1/10W
R5140	1-216-041-00	METAL GLAZE 470	5%	1/10W	R5231	1-216-043-91	METAL GLAZE 560	5%	1/10W
R5141	1-216-041-00	METAL GLAZE 470	5%	1/10W	R5232	1-216-041-00	METAL GLAZE 470	5%	1/10W
R5142	1-216-295-91	CONDUCTOR, CHIP			R5233	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R5143	1-216-295-91	CONDUCTOR, CHIP			R5234	1-216-295-91	CONDUCTOR, CHIP		
R5144	1-216-045-00	METAL GLAZE 680	5%	1/10W	R5235	1-216-295-91	CONDUCTOR, CHIP		
R5145	1-216-045-00	METAL GLAZE 680	5%	1/10W	R5236	1-216-295-91	CONDUCTOR, CHIP		
R5146	1-216-001-00	METAL GLAZE 10	5%	1/10W	R5239	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R5147	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R5240	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R5148	1-216-001-00	METAL GLAZE 10	5%	1/10W	R5242	1-216-295-91	CONDUCTOR, CHIP		
R5151	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R5254	1-216-295-91	CONDUCTOR, CHIP		
R5152	1-216-077-00	METAL GLAZE 15K	5%	1/10W	R5255	1-216-295-91	CONDUCTOR, CHIP		
R5153	1-216-295-91	CONDUCTOR, CHIP			R5256	1-216-295-91	CONDUCTOR, CHIP		
R5156	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R5258	1-216-295-91	CONDUCTOR, CHIP		
R5157	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R5259	1-216-295-91	CONDUCTOR, CHIP		
R5158	1-216-001-00	METAL GLAZE 10	5%	1/10W	R5260	1-216-295-91	CONDUCTOR, CHIP		
R5159	1-216-001-00	METAL GLAZE 10	5%	1/10W	R5261	1-216-295-91	CONDUCTOR, CHIP		
R5160	1-216-041-00	METAL GLAZE 470	5%	1/10W	R5262	1-216-295-91	CONDUCTOR, CHIP		
R5161	1-216-295-91	CONDUCTOR, CHIP			R5263	1-216-295-91	CONDUCTOR, CHIP		
R5162	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R5264	1-216-295-91	CONDUCTOR, CHIP		
R5163	1-216-295-91	CONDUCTOR, CHIP			R5265	1-216-295-91	CONDUCTOR, CHIP		
R5165	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R5266	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R5166	1-216-037-00	METAL GLAZE 330	5%	1/10W	R5267	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R5167	1-216-037-00	METAL GLAZE 330	5%	1/10W	R5268	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R5169	1-216-037-00	METAL GLAZE 330	5%	1/10W	R5272	1-216-025-91	METAL GLAZE 100	5%	1/10W
R5170	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R5274	1-216-033-00	METAL GLAZE 220	5%	1/10W
R5171	1-216-045-00	METAL GLAZE 680	5%	1/10W	R5277	1-216-037-00	METAL GLAZE 330	5%	1/10W
R5172	1-216-025-91	METAL GLAZE 100	5%	1/10W	R5279	1-216-295-91	CONDUCTOR, CHIP		
R5173	1-216-025-91	METAL GLAZE 100	5%	1/10W	R5280	1-216-295-91	CONDUCTOR, CHIP		
R5174	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	R5282	1-216-295-91	CONDUCTOR, CHIP		
R5176	1-216-295-91	CONDUCTOR, CHIP			R5283	1-216-295-91	CONDUCTOR, CHIP		
R5177	1-216-037-00	METAL GLAZE 330	5%	1/10W	R5285	1-216-295-91	CONDUCTOR, CHIP		
R5178	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R6202	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W
R5179	1-216-063-91	METAL GLAZE 3.9K	5%	1/10W	R6203	1-216-053-00	METAL GLAZE 1.5K	5%	1/10W
R5180	1-216-295-91	CONDUCTOR, CHIP			R6204	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R5181	1-216-025-91	METAL GLAZE 100	5%	1/10W	R6205	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R5184	1-216-295-91	CONDUCTOR, CHIP			R6206	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R5187	1-216-025-91	METAL GLAZE 100	5%	1/10W	R6207	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R5188	1-216-041-00	METAL GLAZE 470	5%	1/10W	R6208	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R5189	1-216-295-91	CONDUCTOR, CHIP			R6209	1-216-053-00	METAL GLAZE 1.5K	5%	1/10W
R5192	1-216-037-00	METAL GLAZE 330	5%	1/10W	R6210	1-216-025-91	METAL GLAZE 100	5%	1/10W
R5193	1-216-295-91	CONDUCTOR, CHIP			R6211	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W
R5195	1-216-097-91	METAL GLAZE 100K	5%	1/10W	R6212	1-216-053-00	METAL GLAZE 1.5K	5%	1/10W
R5196	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	R6213	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R5197	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	R6214	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R5198	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	R6215	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R5202	1-216-073-00	METAL GLAZE 10K	5%	1/10W	R6216	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R5204	1-216-025-91	METAL GLAZE 100	5%	1/10W	R6217	1-216-085-00	METAL GLAZE 33K	5%	1/10W
R5210	1-216-025-91	METAL GLAZE 100	5%	1/10W	R6218	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W
R5211	1-216-045-00	METAL GLAZE 680	5%	1/10W	R6219	1-216-053-00	METAL GLAZE 1.5K	5%	1/10W
R5212	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R6220	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R5213	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W	R6221	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R5214	1-216-065-00	METAL GLAZE 4.7K	5%	1/10W	R6222	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R5215	1-216-045-00	METAL GLAZE 680	5%	1/10W	R6223	1-216-041-00	METAL GLAZE 470	5%	1/10W
R5216	1-216-037-00	METAL GLAZE 330	5%	1/10W	R6224	1-216-041-00	METAL GLAZE 470	5%	1/10W
R5217	1-216-025-91	METAL GLAZE 100	5%	1/10W	R6225	1-216-047-91	METAL GLAZE 820	5%	1/10W
R5218	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	R6226	1-216-049-91	METAL GLAZE 1K	5%	1/10W
R5219	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R6227	1-216-081-00	METAL GLAZE 22K	5%	1/10W
R5220	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	R6228	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
R5221	1-216-049-91	METAL GLAZE 1K	5%	1/10W	R6229	1-216-073-00	METAL GLAZE 10K	5%	1/10W
R5222	1-216-025-91	METAL GLAZE 100	5%	1/10W	R6230	1-216-045-00	METAL GLAZE 680	5%	1/10W
R5223	1-216-069-00	METAL GLAZE 6.8K	5%	1/10W	R6231	1-216-025-91	METAL GLAZE 100	5%	1/10W
R5224	1-216-025-91	METAL GLAZE 100	5%	1/10W	R6232	1-216-057-00	METAL GLAZE 2.2K	5%	1/10W
					R6233	1-216-083-00	METAL GLAZE 27K	5%	1/10W

X

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
R6234	1-216-025-91	METAL GLAZE 100	5%	R6309	1-216-025-91	METAL GLAZE 100	5%
R6235	1-216-025-91	METAL GLAZE 100	5%	R6310	1-216-049-91	METAL GLAZE 1K	5%
R6236	1-216-041-00	METAL GLAZE 470	5%				
R6237	1-216-025-91	METAL GLAZE 100	5%	R6311	1-216-295-91	CONDUCTOR, CHIP	
R6238	1-216-091-00	METAL GLAZE 56K	5%	R6312	1-216-033-00	METAL GLAZE 220	5%
				R6313	1-216-025-91	METAL GLAZE 100	5%
R6239	1-216-073-00	METAL GLAZE 10K	5%	R6314	1-216-049-91	METAL GLAZE 1K	5%
R6240	1-216-073-00	METAL GLAZE 10K	5%	R6315	1-216-295-91	CONDUCTOR, CHIP	
R6241	1-216-057-00	METAL GLAZE 2.2K	5%				
R6242	1-216-069-00	METAL GLAZE 6.8K	5%	R6316	1-216-049-91	METAL GLAZE 1K	5%
R6244	1-216-073-00	METAL GLAZE 10K	5%	R6317	1-216-057-00	METAL GLAZE 2.2K	5%
				R6318	1-216-057-00	METAL GLAZE 2.2K	5%
R6245	1-216-025-91	METAL GLAZE 100	5%	R6319	1-216-025-91	METAL GLAZE 100	5%
R6246	1-216-057-00	METAL GLAZE 2.2K	5%	R6320	1-216-295-91	CONDUCTOR, CHIP	
R6247	1-216-025-91	METAL GLAZE 100	5%				
R6248	1-216-041-00	METAL GLAZE 470	5%	R6321	1-216-025-91	METAL GLAZE 100	5%
R6249	1-216-081-00	METAL GLAZE 22K	5%	R6322	1-216-025-91	METAL GLAZE 100	5%
				R6323	1-216-025-91	METAL GLAZE 100	5%
R6250	1-216-081-00	METAL GLAZE 22K	5%	R6324	1-216-295-91	CONDUCTOR, CHIP	
R6252	1-216-057-00	METAL GLAZE 2.2K	5%	R6325	1-216-033-00	METAL GLAZE 220	5%
R6253	1-216-061-00	METAL GLAZE 3.3K	5%				
R6255	1-216-045-00	METAL GLAZE 680	5%	R6326	1-216-049-91	METAL GLAZE 1K	5%
R6256	1-216-057-00	METAL GLAZE 2.2K	5%	R6327	1-216-057-00	METAL GLAZE 2.2K	5%
				R6328	1-216-057-00	METAL GLAZE 2.2K	5%
R6257	1-216-025-91	METAL GLAZE 100	5%	R6329	1-216-295-91	CONDUCTOR, CHIP	
R6258	1-216-049-91	METAL GLAZE 1K	5%	R6330	1-216-057-00	METAL GLAZE 2.2K	5%
R6259	1-216-057-00	METAL GLAZE 2.2K	5%				
R6260	1-216-081-00	METAL GLAZE 22K	5%	R6333	1-216-077-00	METAL GLAZE 15K	5%
R6261	1-216-025-91	METAL GLAZE 100	5%	R6334	1-216-077-00	METAL GLAZE 15K	5%
				R6335	1-216-081-00	METAL GLAZE 22K	5%
R6262	1-216-073-00	METAL GLAZE 10K	5%	R6336	1-216-081-00	METAL GLAZE 22K	5%
R6264	1-216-073-00	METAL GLAZE 10K	5%	R6337	1-216-049-91	METAL GLAZE 1K	5%
R6265	1-216-049-91	METAL GLAZE 1K	5%				
R6266	1-216-049-91	METAL GLAZE 1K	5%	R6338	1-216-089-91	METAL GLAZE 47K	5%
R6269	1-216-049-91	METAL GLAZE 1K	5%	R6339	1-216-025-91	METAL GLAZE 100	5%
				R6340	1-216-025-91	METAL GLAZE 100	5%
R6270	1-216-689-11	METAL GLAZE 39K	5%	R6341	1-216-025-91	METAL GLAZE 100	5%
R6271	1-216-057-00	METAL GLAZE 2.2K	5%	R6342	1-216-057-00	METAL GLAZE 2.2K	5%
R6272	1-216-073-00	METAL GLAZE 10K	5%				
R6273	1-216-049-91	METAL GLAZE 1K	5%	R6343	1-216-057-00	METAL GLAZE 2.2K	5%
R6274	1-216-073-00	METAL GLAZE 10K	5%	R6344	1-216-057-00	METAL GLAZE 2.2K	5%
				R6345	1-216-025-91	METAL GLAZE 100	5%
R6275	1-216-073-00	METAL GLAZE 10K	5%	R6348	1-216-295-91	CONDUCTOR, CHIP	
R6276	1-216-073-00	METAL GLAZE 10K	5%	R6353	1-216-057-00	METAL GLAZE 2.2K	5%
R6277	1-216-051-00	METAL GLAZE 1.2K	5%				
R6278	1-216-051-00	METAL GLAZE 1.2K	5%	R6354	1-216-057-00	METAL GLAZE 2.2K	5%
R6279	1-216-051-00	METAL GLAZE 1.2K	5%	R6355	1-216-295-91	CONDUCTOR, CHIP	
				R6356	1-216-057-00	METAL GLAZE 2.2K	5%
R6280	1-216-295-91	CONDUCTOR, CHIP		R6357	1-216-033-00	METAL GLAZE 220	5%
R6281	1-216-049-91	METAL GLAZE 1K	5%	R6358	1-216-073-00	METAL GLAZE 10K	5%
R6282	1-216-295-91	CONDUCTOR, CHIP					
R6283	1-216-049-91	METAL GLAZE 1K	5%	R6374	1-216-081-00	METAL GLAZE 22K	5%
R6284	1-216-049-91	METAL GLAZE 1K	5%	R6375	1-216-049-91	METAL GLAZE 1K	5%
				R6376	1-216-057-00	METAL GLAZE 2.2K	5%
R6285	1-216-295-91	CONDUCTOR, CHIP		R6377	1-216-049-91	METAL GLAZE 1K	5%
R6286	1-216-069-00	METAL GLAZE 6.8K	5%	R6378	1-216-049-91	METAL GLAZE 1K	5%
R6287	1-216-081-00	METAL GLAZE 22K	5%				
R6288	1-216-081-00	METAL GLAZE 22K	5%	R6379	1-216-049-91	METAL GLAZE 1K	5%
R6289	1-216-073-00	METAL GLAZE 10K	5%	R6380	1-216-049-91	METAL GLAZE 1K	5%
				R6381	1-216-049-91	METAL GLAZE 1K	5%
R6291	1-216-041-00	METAL GLAZE 470	5%	R6382	1-216-049-91	METAL GLAZE 1K	5%
R6292	1-216-041-00	METAL GLAZE 470	5%	R6383	1-216-049-91	METAL GLAZE 1K	5%
R6293	1-216-049-91	METAL GLAZE 1K	5%				
R6294	1-216-049-91	METAL GLAZE 1K	5%	R6384	1-216-033-00	METAL GLAZE 220	5%
R6295	1-216-057-00	METAL GLAZE 2.2K	5%	R6385	1-216-033-00	METAL GLAZE 220	5%
				R6386	1-216-033-00	METAL GLAZE 220	5%
R6296	1-216-057-00	METAL GLAZE 2.2K	5%	R6387	1-216-033-00	METAL GLAZE 220	5%
R6297	1-216-025-91	METAL GLAZE 100	5%	R6388	1-216-073-00	METAL GLAZE 10K	5%
R6298	1-216-025-91	METAL GLAZE 100	5%				
R6299	1-216-025-91	METAL GLAZE 100	5%	R6390	1-216-081-00	METAL GLAZE 22K	5%
R6300	1-216-033-00	METAL GLAZE 220	5%	R6391	1-216-041-00	METAL GLAZE 470	5%
				R6392	1-216-121-91	METAL GLAZE 1M	5%
R6301	1-216-049-91	METAL GLAZE 1K	5%	R6393	1-216-025-91	METAL GLAZE 100	5%
R6302	1-216-057-00	METAL GLAZE 2.2K	5%	R6394	1-216-025-91	METAL GLAZE 100	5%
R6303	1-216-057-00	METAL GLAZE 2.2K	5%				
R6304	1-216-049-91	METAL GLAZE 1K	5%	R6395	1-216-025-91	METAL GLAZE 100	5%
R6305	1-216-025-91	METAL GLAZE 100	5%	R6396	1-216-025-91	METAL GLAZE 100	5%
				R6397	1-216-025-91	METAL GLAZE 100	5%
R6306	1-216-295-91	CONDUCTOR, CHIP		R6398	1-216-073-00	METAL GLAZE 10K	5%
R6307	1-216-025-91	METAL GLAZE 100	5%	R6399	1-216-089-91	METAL GLAZE 47K	5%
R6308	1-216-025-91	METAL GLAZE 100	5%				
				R6400	1-216-057-00	METAL GLAZE 2.2K	5%



Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK
R6401	1-216-057-00	METAL GLAZE 2.2K	5% 1/10W
R6402	1-216-061-00	METAL GLAZE 3.3K	5% 1/10W
R6403	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6404	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6405	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R6406	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6407	1-216-065-00	METAL GLAZE 4.7K	5% 1/10W
R6408	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6409	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R6410	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6411	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6412	1-216-049-91	METAL GLAZE 1K	5% 1/10W
R6413	1-216-081-00	METAL GLAZE 22K	5% 1/10W
R6414	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6415	1-216-073-00	METAL GLAZE 10K	5% 1/10W
R6416	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6418	1-216-069-00	METAL GLAZE 6.8K	5% 1/10W
R6419	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6420	1-216-025-91	METAL GLAZE 100	5% 1/10W
R6421	1-216-025-91	METAL GLAZE 100	5% 1/10W

<CRYSTAL>

X5001	1-567-505-11	OSCILLATOR, CRYSTAL
X5002	1-567-505-11	OSCILLATOR, CRYSTAL
X6201	1-579-125-11	VIBRATOR, CERAMIC

MISCELLANEOUS

1-251-321-11 SELECTOR, ANTENNA

 Δ 1-406-586-11 COIL, DEMAGNETIZATION Δ 1-406-587-11 COIL, DEMAGNETIZATION Δ 1-452-616-13 NECK ASSY, PICTURE TUBE (NA323) Δ 1-452-697-11 COIL, PICTURE TUBE NECK ASSY ROTATION Δ 1-467-525-11 CAP BLOCK, HIGH-VOLTAGE

1-473-399-11 SWITCH BLOCK

1-504-993-11 SPEAKER (8CM)

1-504-994-11 SPEAKER (8CM)

1-504-995-11 SPEAKER (10CM)

1-504-996-11 SPEAKER (5CM)

1-504-997-11 SPEAKER (2.5CM)

1-564-505-11 PLUG, CONNECTOR 2P

 Δ 1-751-059-11 CORD, POWER (MONITOR) (10A/125V)

* 1-751-135-21 CABLE, PIN

* 1-751-136-21 CABLE, PIN

 Δ 1-769-837-11 CORD, POWER (WITH NOISE FILTER)

1-900-800-29 LEAD ASSY, FOCUS

1-900-800-31 LEAD ASSY, FASTEN

 Δ 8-451-393-12 DY Y34EXA(MTY)

8-749-011-10 IC GP2D05

T501 Δ X 4033-094-1 TRANSFORMER ASSY, FLYBACK (NX-3001)V901 Δ 8-733-731-05 PICTURE TUBE 34EX (M81KVA10X)

REF. NO.	PART NO.	DESCRIPTION	REMARK
		ACCESSORIES AND PACKING MATERIALS	

	1-775-534-11	CABLE ASSY (HALF PITCH)	
	3-800-727-21	MANUAL, INSTRUCTION (ENGLISH)	
	3-800-727-31	MANUAL, INSTRUCTION (FRENCH)	
	3-800-727-41	MANUAL, INSTRUCTION (SPANISH)	
	3-701-627-00	BAG, POLYETHYLENE	
	* 4-048-400-01	BAG, PROTECTION	
	* 4-048-401-01	BAG, PROTECTION	
	* 4-048-402-01	BAG, PROTECTION	
	* 4-048-403-01	CUSHION (UPPER) (ASSY)	
	* 4-048-404-01	CUSHION (LOWER) (ASSY)	
	* 4-048-405-01	INDIVIDUAL CARTON	
	4-049-256-01	COVER, TERMINAL	
	4-050-729-01	CUSHION	
		REMOTE COMMANDER	

	1-473-306-11	REMOTE COMMANDER (RM-Y128)	
	9-933-736-01	POCKET, COVER (FOR RM-Y128)	