

**DIGITAL CLOCK DISTRIBUTOR**  
**500 SERIES**  
**OPERATIONS**  
**RELEASE 5.02.xx**

CONTENTS	PAGE	Charts (Contd)	Page
1. GENERAL .....	2	11. Edit Nonstandard Card Information . . . .	52
2. TASKS .....	2	12. Delete Nonstandard Card from Database .....	54
3. COMMAND CONVENTIONS .....	6	13. Standard Card Configuration .....	56
4. SHELF ADDRESSING .....	6	14. Reference Input Ports .....	63
5. TO AND PSM CARD ADDRESSING .....	6	15. Monitor Input Ports .....	75
6. STANDARD VS. NONSTANDARD CARDS .....	12	16. Timing Output Ports .....	87
7. SECURITY .....	14	17. Synchronization Source for Outputs . . . .	90
A. Switch Setting .....	14	18. Output Protection for Standard Output Cards .....	92
B. Command Levels .....	14	19. Copy Database of Standard Cards . . . .	94
8. DATABASE DOWNLOAD .....	14	20. Copy MIS Card Program from External Source to MIS Card .....	96
9. PROVISIONING SEQUENCE .....	14	21. GPS Information .....	98
10. FACTORY SETTINGS .....	14		
		<b>Figures</b>	
		1. TO and PSM Card Addressing in a DCD-519 Master Shelf .....	8
		2. TO and PSM Card Addressing in a DCD-519 Expansion Shelf .....	9
		3. TO and PSM Card Addressing in a DCD-523 Shelf .....	10
		4. TO and PSM Card Addressing in a DCD-521/C Shelf .....	11
		<b>Tables</b>	
		A. Tasks .....	3
		B. Standard Cards .....	12
		C. Steps to Put a System in Service .....	15
		D. Steps to Remove Equipment .....	15
		E. Steps for Ports Only .....	16
		F. Factory Settings .....	16
		G. GTI Card Alarm Integration Times .....	62
		H. Alarm/Event Summary .....	99

**1. GENERAL**

**1.01** This practice provides procedures for operating Telecom Solutions' Digital Clock Distributor (DCD) 500 System when equipped with an MIS card with a part number of 090-44018-05 or 090-45018-05. The language used for the commands in this practice is Transaction Language 1 (TL1).

**1.02** This practice has been reissued for the reasons listed below. Changed areas are marked by change bars.

- In Chart 10, page 50, for the Enter Clock Card task, the <aid> for the clock card slot was changed from CLK1 or CLK2, to CLOCK1 or CLOCK2.
- Chart 11, page 52, was added.
- In Chart 12 (was Chart 11 in the previous issue), page 54, for the Delete Clock Card task, the <aid> for the clock card slot was changed from CLK1 or CLK2, to CLOCK1 or CLOCK2.

**1.03** All product names, service marks, trademarks, and registered trademarks used in this document are the property of their respective owners.

**1.04** The following abbreviations are used in this document:

ACI	Analog Clock Input
CI	Clock Input

CI-EA	Clock Input - E1 Analog
ECI	E1 Clock Input
GPS	Global Positioning System
GTI	GPS Timing Interface
GTR	GPS Timing Antenna/Receiver
LNC	Local Node Clock
MCA-5	Matrix Controller Automatic-5
MIS	Maintenance Interface, System
MRC	Multi-Reference Controller
PRS	Primary Reference Source
PSM	Precision Synchronization Monitor
TNC	Transit Node Clock
TNC-E	Transit Node Clock Enhanced
TO	Timing Output
ST2	Stratum-2 Clock
ST2E	Stratum-2 Clock Enhanced
ST3	Stratum-3 Clock
ST3E	Stratum-3 Clock Enhanced
TOAA	Timing Output Analog Automatic
TOCA	Timing Output Composite Clock Automatic
TOEA	Timing Output E1 Automatic
TO-EA	Timing Output E1 Analog
TOGA	Timing Output G.703 Automatic
TOLA	Timing Output Logic Level Automatic
TOTA	Timing Output T1 Level Automatic
TOTL	Timing Output T1 with LBO Automatic

**2. TASKS**

**2.01** Table A lists the tasks for operating the DCD-500 System and the charts that show how to perform the tasks.

Table A. Tasks

TASK	CHART NUMBER	CHART TITLE
<ul style="list-style-type: none"> <li>• Logon</li> <li>• Logoff</li> </ul>	1	Logon & Logoff
<ul style="list-style-type: none"> <li>• Silence alarms</li> <li>• Display all current alarms in a shelf</li> <li>• Display current alarms of specified equipment</li> <li>• Display current conditions of all equipment in a shelf</li> <li>• Display current conditions of specified equipment</li> <li>• Display current alarms of specified ports</li> <li>• Display current conditions of specified ports</li> <li>• Display message log</li> <li>• Clear message log</li> </ul>	2	Alarms & Status
<ul style="list-style-type: none"> <li>• Display access level of a single user</li> <li>• Display access level of all users</li> <li>• Assign user</li> <li>• Change password</li> <li>• Change user name, password &amp; access level</li> <li>• Delete user</li> </ul>	3	Security
<ul style="list-style-type: none"> <li>• Display communication parameters</li> <li>• Change communication parameters</li> <li>• Drop DTR signal for 5 seconds</li> </ul>	4	Communication Ports
<ul style="list-style-type: none"> <li>• Display date and time</li> <li>• Change date and time</li> <li>• Display memory bank being used for MIS card program</li> <li>• Change to alternate MIS card program</li> <li>• Delete card database in MIS card</li> <li>• Reset MIS card</li> <li>• Completely reset MIS card to factory settings</li> <li>• Display system name</li> <li>• Change system name</li> <li>• Display equipment</li> </ul>	5	System Configuration
<ul style="list-style-type: none"> <li>• Enter and restore clock card</li> <li>• Enter and restore GTI card</li> <li>• Enter and restore LTI card</li> <li>• Enter and restore MRC card and ports</li> <li>• Enter and restore PSM card and ports</li> <li>• Enter and restore timing output card and ports</li> </ul>	6	Enter into the Database and Put In Service a Standard Card
<ul style="list-style-type: none"> <li>• Restore clock card</li> <li>• Restore GTI card</li> <li>• Restore LTI card</li> <li>• Restore MRC card</li> <li>• Restore PSM card</li> <li>• Restore timing output card</li> </ul>	7	Put Standard Card in Service
<ul style="list-style-type: none"> <li>• Remove clock card</li> <li>• Remove GTI card</li> <li>• Remove LTI card</li> <li>• Remove MRC card</li> <li>• Remove PSM card</li> <li>• Remove timing output card</li> </ul>	8	Take Standard Card Out of Service

Table A. Tasks (Contd)

TASK	CHART NUMBER	CHART TITLE
<ul style="list-style-type: none"> <li>• Delete clock card</li> <li>• Delete GTI card</li> <li>• Delete LTI card</li> <li>• Delete MRC card</li> <li>• Delete PSM card</li> <li>• Delete timing output card</li> </ul>	9	Delete Standard Card from Database
<ul style="list-style-type: none"> <li>• Enter clock card</li> <li>• Enter input card</li> <li>• Enter output card</li> <li>• Enter protection card</li> <li>• Enter PRS card</li> </ul>	10	Enter Nonstandard Card in Database
<ul style="list-style-type: none"> <li>• Edit clock card</li> <li>• Edit input card</li> <li>• Edit output card</li> <li>• Edit protection card</li> <li>• Edit PRS card</li> </ul>	11	Edit Nonstandard Card Information
<ul style="list-style-type: none"> <li>• Delete clock card</li> <li>• Delete input card</li> <li>• Delete output card</li> <li>• Delete protection card</li> <li>• Delete LTI card</li> </ul>	12	Delete Nonstandard Card from Database
<ul style="list-style-type: none"> <li>• Display parameters for all cards</li> <li>• Display GTI card parameters</li> <li>• Change GTI card parameters</li> <li>• Display MRC card parameters</li> <li>• Change MRC card parameters</li> <li>• Display timing output card parameters</li> <li>• Change timing output card parameters</li> </ul>	13	Standard Card Configuration
<ul style="list-style-type: none"> <li>• Enter port</li> <li>• Restore port</li> <li>• Display performance monitoring data</li> <li>• Clear performance monitoring data</li> <li>• Display framing, priority, reference type, &amp; signal type</li> <li>• Change framing, priority, reference type, &amp; signal type</li> <li>• Display threshold</li> <li>• Change threshold</li> <li>• Display alarm severity</li> <li>• Change alarm severity</li> <li>• Display message type for autonomous port alarms</li> <li>• Set message type for autonomous port alarms</li> <li>• Remove port</li> <li>• Delete port</li> </ul>	14	Reference Input Ports

Table A. Tasks (Contd)

TASK	CHART NUMBER	CHART TITLE
<ul style="list-style-type: none"> <li>• Enter port</li> <li>• Restore port</li> <li>• Display performance monitoring data</li> <li>• Clear performance monitoring data</li> <li>• Display framing &amp; signal type</li> <li>• Change framing &amp; signal type</li> <li>• Display threshold</li> <li>• Change threshold</li> <li>• Display alarm severity</li> <li>• Change alarm severity</li> <li>• Display message type for autonomous port alarms</li> <li>• Set message type for autonomous port alarms</li> <li>• Remove port</li> <li>• Delete port</li> </ul>	15	Monitor Input Ports
<ul style="list-style-type: none"> <li>• Enter port</li> <li>• Restore port</li> <li>• Display signal type</li> <li>• Change signal type</li> <li>• Display message type for autonomous port alarms</li> <li>• Set message type for autonomous port alarms</li> <li>• Remove port</li> <li>• Delete port</li> </ul>	16	Timing Output Ports
<ul style="list-style-type: none"> <li>• Display source mode for timing output cards</li> <li>• Change source mode for timing output cards</li> <li>• Select source for timing output cards</li> <li>• Release source for timing output cards</li> </ul>	17	Synchronization Source for Timing Output Cards
<ul style="list-style-type: none"> <li>• Display output protection type for timing output cards</li> <li>• Change output protection type for timing output cards</li> <li>• Switch to protection timing output card</li> <li>• Release protection timing output card</li> </ul>	18	Output Protection for Standard Timing Output Cards
<ul style="list-style-type: none"> <li>• Copy card database from MIS card to other cards</li> <li>• Copy card database from other cards to MIS card</li> <li>• Copy MIS card program from external source to MIS card</li> </ul>	19	Copy Program and Database for Standard Cards
<ul style="list-style-type: none"> <li>• Copy program from external source to MIS card</li> </ul>	20	Copy Program from External Source to MIS Card
<ul style="list-style-type: none"> <li>• Display GPS statistics</li> </ul>	21	GPS Information

### 3. COMMAND CONVENTIONS

**3.01** For a more complete description of the TL1 language syntax and language structure, refer to the User's Guide section of this manual.

**3.02** The following conventions are used in the input and response messages:

< >	encloses a parameter
[ ]	encloses an optional parameter
{ }	encloses multiple parameters, one of which must be selected (or in a response, one of which will appear)
	separates parameters enclosed by the { } symbols
" "	encloses a report of an alarm, event, AID or log
/* */	encloses condition descriptions
:	separates parameter blocks
,	separates parameters within a block
&	indicates "and" (1&9 means 1 and 9)
&&	indicates a range (1&&9 means 1 through 9)
. . .	indicates the line may repeat one or more times
;	terminates a command and causes execution

> indicates a message continuation (message blocks are limited to 4096 bytes)

**Note:** When listing parameter values that can be used in a command, a range of numbers is shown as a–b, where any number a, b, or any number between a and b can be entered. (Example: 1–12 indicates any number from 1 through 12 inclusive.)

### 4. SHELF ADDRESSING

**4.01** A particular shelf in a particular system is addressed through the <aid> or the <tid>, depending on the software version of the MIS card. All commands are directed to the master shelf of the system unless an expansion or remote shelf identifier is added to the <aid> or <tid>. In a response, the <aid> or <tid> identifies the shelf that is responding.

**Note:** There are a few commands which have a <shelf> field which must be entered to direct a command at a particular shelf. This is in addition to the <aid> or <tid>.

**4.02** The shelf types are defined as follows:

*Master:* The shelf that is the communications interface for the system and contains the highest-quality clocks in the system.

*Expansion:* A shelf that has no input cards, no clock cards, and is timed from the master shelf via a ribbon cable (generally collocated with the master shelf).

*Remote:* A shelf that contains timing input cards that use composite clock timing signals from the master or an expansion shelf (generally located distant from the master shelf).

**MIS Card with S/W Label A**

**4.03** When directing a command to a shelf in a system without remote shelves (which can have up to three expansion shelves), modify the tid (if necessary) as follows:

- <tid> = Master shelf and/or LPR shelf
- <tid>E1 = Expansion shelf #1
- <tid>E2 = Expansion shelf #2
- <tid>E3 = Expansion shelf #3

**4.04** If the system includes a remote shelf, a maximum of two expansion shelves can be collocated with the master shelf, and no expansion shelves can be timed from the remote shelf. Therefore, modify the aid (if necessary) as follows:

- <tid> = Master shelf and/or LPR shelf
- <tid>E1 = Expansion shelf #1
- <tid>E2 = Expansion shelf #2
- <tid>E3 = Remote shelf

*Note:* In a system with a remote shelf, E3 is used to identify the remote shelf even if there are no expansion shelves.

**MIS Card with S/W Label B**

**4.05** When directing a command to a shelf in a system without remote shelves (which can have up to

three expansion shelves), modify the aid (if necessary) as follows:

- <aid> = Master shelf and/or LPR shelf
- E1-<aid> = Expansion shelf #1
- E2-<aid> = Expansion shelf #2
- E3-<aid> = Expansion shelf #3


**4.06** If the system includes a remote shelf, a maximum of two expansion shelves can be collocated with the master shelf, and no expansion shelves can be timed from the remote shelf. Therefore, modify the aid (if necessary) as follows:

- <aid> = Master shelf and/or LPR shelf
- E1-<aid> = Expansion shelf #1
- E2-<aid> = Expansion shelf #2
- E3-<aid> = Remote shelf

*Note:* In a system with a remote shelf, E3 is used to identify the remote shelf even if there are no expansion shelves.

**5. TO AND PSM CARD ADDRESSING**

**5.01** How TO and PSM cards are addressed depends on the shelf model, protection type, and other factors. Refer to Figures 1 through 4 for addressing information. The notes in each figure provide important addressing details.

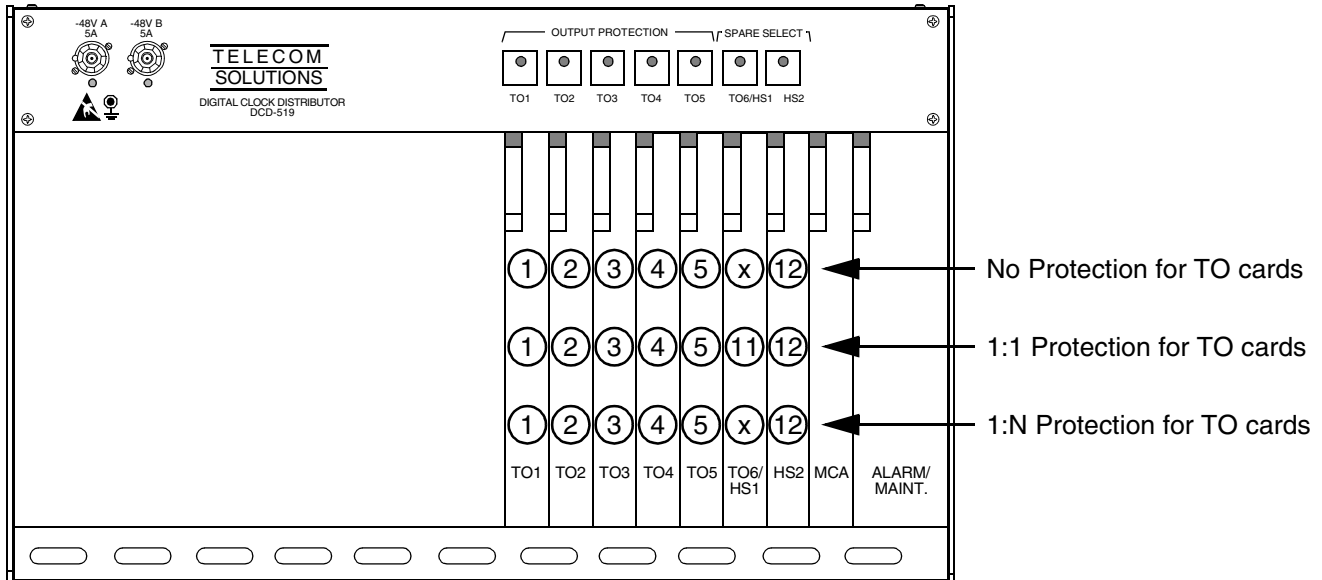


Notes:

1. The circled numbers are the addresses of the TO cards.
2. TO slots 1 through 3 may not be accessible depending on the clock type installed.
3. TO cards in TO slots 1 through 5 are addressed as the TO slot where installed (TO1, TO2, etc).
4. The TO card in slot HS2 is addressed as TO12.
5. With no TO card protection, the TO card in the TO6/HS1 slot is addressed as TO6 (SW6 and SW7 on the shelf backplane set to 6:1) or as TO11 (SW6 and SW7 set to 5:2).
6. With 1:1 or 1+1 TO card protection, the TO card in the TO6/HS1 slot is addressed as TO11 (SW6 and SW7 on the shelf backplane must be set to 5:2).
7. With 1:N TO card protection, the TO card in the TO6/HS1 slot is addressed as TO6 (one hot spare TO card and SW6 and SW7 on the shelf backplane are set to 6:1) or as TO11 (two hot spare TO cards and SW6 and SW7 are set to 5:2).
8. With 1:1 or 1+1 TO card protection, the TO card pairs are as follows: 2 and 3, 4 and 5, 11 and 12
9. Notes 1 through 7 also apply to PSM cards with the following exceptions:
  - Use PSM1 instead of TO1, etc.
  - PSM cards are double-wide cards, and therefore cannot be installed in adjacent slots.
  - PSM cards are not allowed in the TO6/HS1 slot when 1:N protection is used.
  - PSM cards are not allowed in the TO3 or HS2 slot.

Figure 1. TO and PSM Card Addressing in a DCD-519 Master Shelf



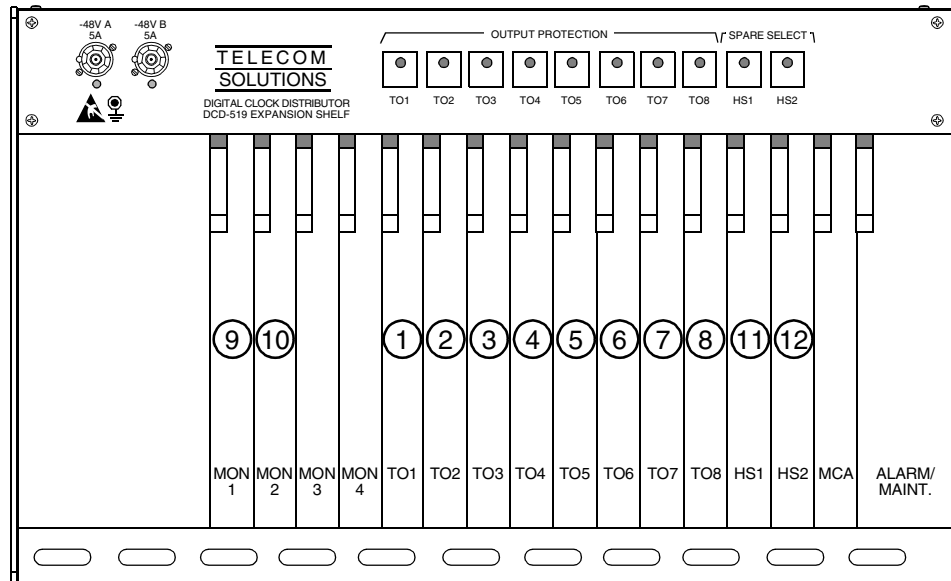


**TO Card Notes:**

1. The circled numbers are the addresses of TO cards (except 9 and 10).
2. TO cards in slots 1 through 8 are addressed by the TO slot where installed (TO1, TO2, etc).
3. A TO card in slot HS1 is addressed by TO11, and a TO card in slot HS2 is addressed by TO12.
4. TO cards are not allowed in slots MON1 and MON2.
5. For 1:1 and 1+1 TO card protection, the TO card pairs are as follows: 1 and 2, 3 and 4, 5 and 6, 7 and 8, 9 and 10, 11 and 12.

**PSM Card Notes:**

1. The circled numbers are the addresses of PSM cards (except 12).
2. PSM cards are double-wide cards, and therefore cannot be installed in adjacent slots.
3. PSM cards in slots 1 through 8 are addressed by the TO slot where installed (a PSM card in slot TO1 is PSM1, a PSM card in slot TO2 is PSM2, etc).
4. A PSM card in slot MON1 is addressed by PSM9, and a PSM card in slot MON2 is addressed by PSM10.
5. A PSM card in slot HS1 is addressed by PSM11.
6. PSM cards are not allowed in slot HS1 with 1:N protection.
7. PSM cards are not allowed in the TO6 or HS2 slot.

**Figure 2. TO and PSM Card Addressing in a DCD-519 Expansion Shelf**

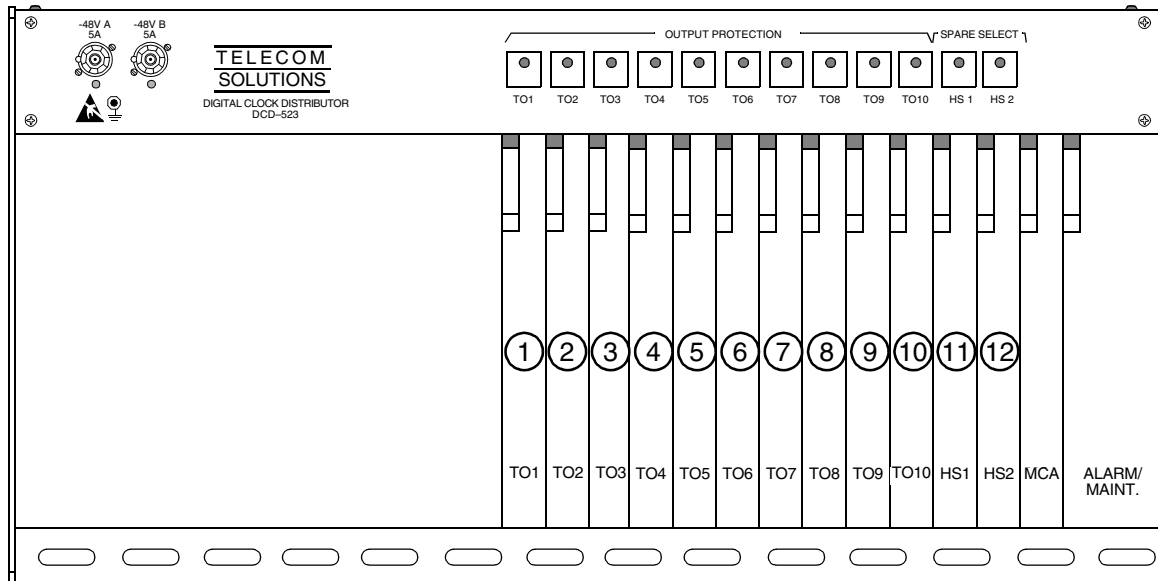


**TO Card Notes:**

1. The circled numbers are the addresses of TO cards.
2. TO cards in slots 1 through 10 are addressed by the TO slot where installed (TO1, TO2, etc).
3. Only TO-EA cards can be addressed in the HS1 and HS2 slots. A TO-EA card in slot HS1 is addressed by TO11, and a TO-EA card in slot HS2 is addressed by TO12.
4. For 1:1 and 1+1 TO card protection, the TO card pairs are as follows: 1 and 2, 3 and 4, 5 and 6, 7 and 8, 9 and 10, 11 and 12.

**PSM Card Notes:**

1. The circled numbers are the addresses of PSM cards (except 12).
2. PSM cards are double-wide cards, and therefore cannot be installed in adjacent slots.
3. PSM cards in slots 1 through 10 are addressed by the TO slot where installed (a PSM card in slot TO1 is PSM1, a PSM card in slot TO2 is PSM2, etc).
4. PSM cards are not allowed in slot HS1 with 1:N protection.
5. PSM cards are not allowed in the TO3 or HS2 slot.

**Figure 3. TO and PSM Card Addressing in a DCD-523 Shelf**

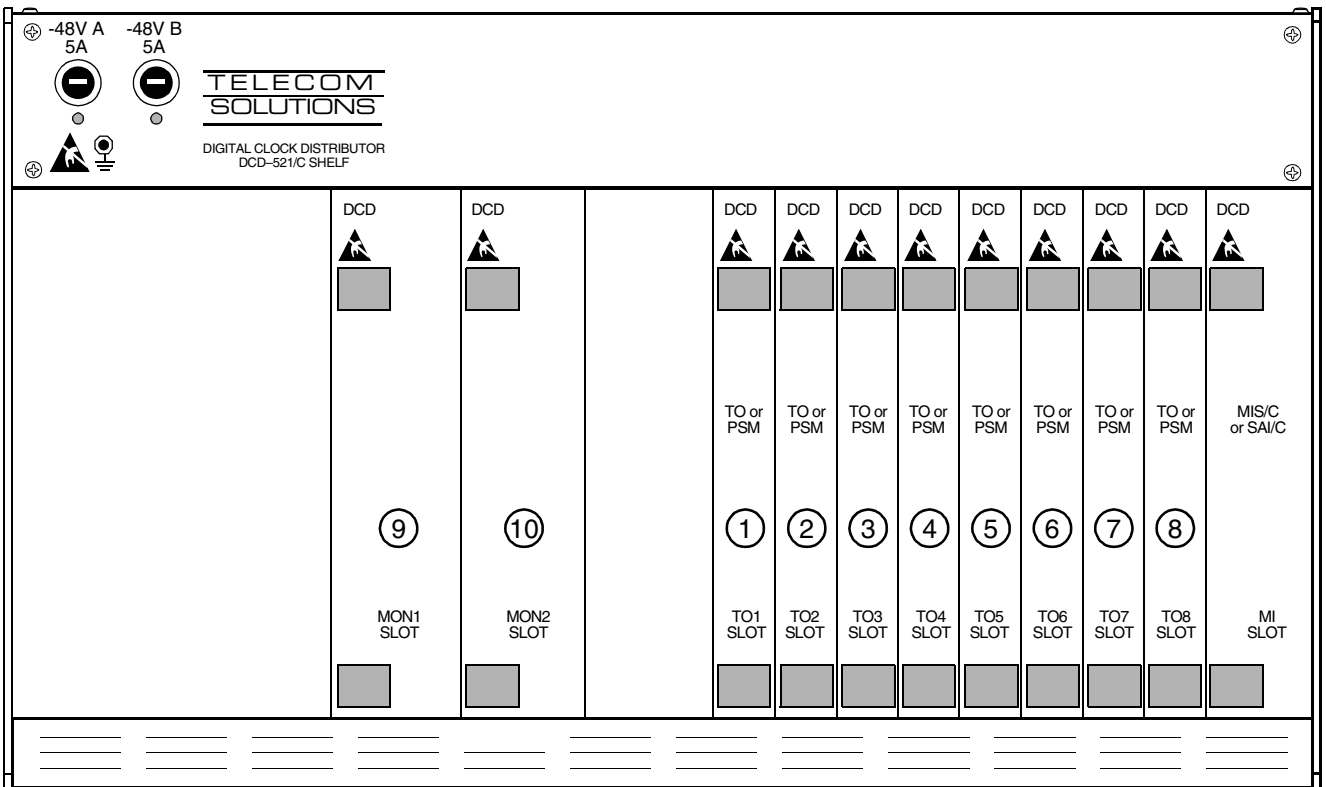

TO Card Notes:

1. The circled numbers are the addresses of TO cards.
2. TO cards in slots 1 through 8 are addressed by the TO slot where installed (TO1, TO2, etc).
3. TO cards are not allowed in the MON1 and MON2 slots.
4. For 1:1 and 1+1 TO card protection, the TO card pairs are as follows: 1 and 2, 3 and 4, 5 and 6, 7 and 8.

PSM Card Notes:

1. The circled numbers are the addresses of PSM cards (except TO8 where a PSM card cannot fit when an MIS card is installed).
2. PSM cards are double-wide cards, and therefore cannot be installed in adjacent slots.
3. PSM cards in slots 1 through 7 are addressed by the TO slot where installed (a PSM card in slot TO1 is PSM1, a PSM card in slot TO2 is PSM2, etc).
4. A PSM card in slot MON1 is addressed by PSM9, and a PSM card in slot MON2 is addressed by PSM10.

Figure 4. TO and PSM Card Addressing in a DCD-521/C Shelf

## 6. STANDARD VS. NONSTANDARD CARDS

**6.01** Standard cards are those cards which can communicate status information to the MIS card. Non-standard cards cannot communicate status information to the MIS card. Table B lists the standard cards; all other cards are nonstandard.

### A. Standard Cards

**6.02** When a standard card is entered with the ENT-EQPT command, the card information (factory settings, serial number, CLEI code, etc.) is copied to the MIS card which stores a complete shelf database about all cards.

**Table B. Standard Cards**

CARD	PART NUMBER
Version 5 MRC-EA	090-45010-56
Version 5 MRC-EA/C	090-44010-56
Version 5 MRC-T	090-45010-53
Version 5 PSM-E	090-45025-52
Version 5 PSM-E/C	090-44025-52
Version 5 PSM-EA	090-45025-54
Version 5 PSM-EA/C	090-44025-54
Version 5 PSM-T	090-45025-51
Version 5 TO-EA	090-45029-51
Version 5 TO-EA/C	090-44029-51
Version 5 TOTA-5	090-45012-52
GTI (located in LPR shelf)	090-42140-13, software revision E or higher 090-42140-14, software revision E or higher 090-42140-15, software revision B or higher 090-44140-14, software revision E or higher
LTI (located in LPR shelf) (see note)	090-41140-01 090-41140-02
ST2 (see note)	090-40017-01
ST2E (see note)	090-40017-02
ST3 (see note)	090-40013-01
ST3E (see note)	090-40019-03
TNC (see note)	090-44020-02 or 090-45020-02
TNC-E (see note)	090-44017-02 or 090-45017-02
LNC (see note)	090-44019-02 or 090-45019-02
Note: The following cards in this table do not contain inventory information and must be manually entered using the ENT-INVENTORY command: LTI, ST2, ST2E, ST3, ST3E, TNC, TNC-E, LNC.	

**6.03** Standard cards and ports can be entered in the database using the complete TL1 command sequence or an abbreviated method can be used.

### Complete Command Sequence

*Card installed:* when the card is first installed, all outputs are enabled and the card and ports perform their prescribed function (if enabled by card switches). In this state, the card cannot communicate with the MIS card; therefore, card information and alarm reporting is not supported by the MIS card.

*Card entered:* after the card is entered with the ENT-EQPT command (including the card parameters), the card information and configuration is copied to the system database in the MIS card where it is stored in nonvolatile memory; outputs may be squelched (depending on the card configuration status) and alarms are not reported.

*Port entered:* (applies only to input cards, monitor cards, and timing output cards) after the port is entered with the ENT-PORT command, the entered port configuration is copied to the system database in the MIS card and stored in nonvolatile memory; outputs may be squelched (depending on the card configuration status) and alarms are not reported.

*Card restored:* after the card is restored with the RST-EQPT command, the card performs all its prescribed equipment-related functions. The timing input and output ports of the cards remain out of service. Port-related status and alarm reporting is inhibited.

*Port restored:* (applies only to input cards, monitor cards, and timing output cards) after the port is restored via the RST-PORT command, the card and all provisioned inputs and outputs are in service.

*Port removed:* (applies only to input cards, monitor cards, and timing output cards) after the port

is removed via the RMV-PORT command, the card performs all its prescribed functions except that the removed port is squelched and port-related alarms are reported.

*Card removed:* after the card is removed via the RMV-EQPT command, the card no longer performs its prescribed functions; outputs are squelched and equipment and port alarms are not reported.

*Port deleted:* (applies only to input cards, monitor cards, and timing output cards) after the port is deleted via the DLT-PORT command, the card performs all its prescribed functions except that the deleted port is removed from the system database; outputs are squelched and alarms are reported.

*Card deleted:* after the card is deleted via the DLT-EQPT command, the card is erased from the system database; outputs are squelched and alarms are not reported.

### Abbreviated Command Sequence

**6.04** To use the abbreviated sequence, the ENT-EQPT command for the desired standard card is entered without any parameters as follows:

```
ENT-EQPT: [<tid>] :<aid>:<ctag>;
```

**6.05** The ENT-EQPT command without parameters is the same as using the following commands: ENT-EQPT, ENT-PORT, RST-EQPT, and RST-PORT. The card will be in-service, and ports will be in or out of service as determined by card switch settings.

### B. Nonstandard Cards

**6.06** Nonstandard cards are fully functional when plugged into the shelf. To enter information about a nonstandard card into the database, use the ENT-INVENTORY command.

## 7. SECURITY

**7.01** Security is controlled by a combination of a switch on the MIS card and by assigning users with passwords and particular access levels. To enable security, the switch must be set correctly and all users must have non-null passwords. Once security is enabled, access to commands is controlled by assigning levels to users.

### A. Switch Setting

**7.02** To enable security, section 4 of SW1 on the MIS card must be set to the ON position. From the factory, the switch is set for no security (section 4 is in the OFF position). While in this configuration, all commands can be accessed without logging onto the system. For all the switch settings on the MIS card, refer to the manual that came with the shelf where the card is installed.

### B. Command Levels

**7.03** Security consists of restricting access to commands. Restriction is accomplished by requiring a particular access level for each command. The access level is listed with each command. The access levels are from 1 (lowest) to 5 (highest). Each user is assigned an access level allowing access to all commands at that level and below. A user with level 5 can access all commands.

**7.04** As shipped from the factory, one user is assigned with a user name of "super", a password of "sparky", and an access level of 5. Up to 16 additional users can be assigned (for a total of 17 users) with any access levels.

## 8. DATABASE DOWNLOAD

**8.01** Database downloading is the process of copying card configuration information from the nonvolatile memory in the MIS card to the standard cards. Database downloading is used to automatically con-

figure standard cards, which do not have nonvolatile memory, following a power cycle of the card or the shelf (if the cards were previously entered in the system).

**8.02** Section 5 of switch SW1 on the MIS card controls whether the card database configuration is downloaded from the MIS card to the standard cards. To enable downloading, section 5 must be set to ON. When enabled, the database download will occur when the MIS card is pulled out, then reinstalled in the shelf, or when the shelf is power cycled (does not require a craft terminal). If the MIS database does not match the card database, a database mismatch will occur and must be resolved. (The CPY-MEM command must be used to copy the card databases to the MIS card, or to copy the MIS card database to the cards.)

**8.03** If section 5 of SW1 is set to OFF, the card operation will be based on card switch settings or previously provisioned options.

**8.04** If a standard card is replaced, the new card will automatically be entered in the system database.

## 9. PROVISIONING SEQUENCE

**9.01** Use the steps in Table C to put a system in service. If equipment must be removed, user the steps in Table D. Table E lists the steps for adding and removing ports.

**Caution:** *Using an EDIT command on an in-service input or output card will cause a service interruption. The interruption will occur because the transmission operating parameters are redefined and reinitialized.*

## 10. FACTORY SETTINGS

**10.01** For a list of factory settings, refer to Table F.

**Table C. Steps to Put Equipment into Service and into Database**

STEP	PROCEDURE	COMMAND
1	Insert cards into shelf	N/A
2	Log on	ACT-USER
3	Set communication parameters (Note 1)	ED-COM
4	Enter current date and time (Note 2)	ED-DAT
5	Enter system/shelf identification	SET-SID
6	Assign users	ENT-USER-SECU
7	Enter card into system database (standard cards only) (enters and restores the card, enters and restores all ports on the card)	ENT-EQPT
8	Change card parameters (if required)	ED-EQPT
9	Change port parameters (if required)	ED-PORT
10	Enter nonstandard cards into the database	ENT-INVENTORY
11	Set source mode (TO cards only)	SET-ATTR-CONT
12	Set output protection type (TO cards only)	SET-ATTR-CONT
13	Set notification codes for port events (MRC and PSM cards only)	SET-ATTR-PORT
14	Set threshold level for monitored parameters (MRC and PSM cards only)	SET-TH-PORT
15	Log off	CANC-USER
<p>Notes:</p> <ol style="list-style-type: none"> <li>1. If any communication parameters are changed which causes loss of communication, set the terminal parameters to match the set parameters, then restart the terminal and wait 30 seconds.</li> <li>2. Failure to use the ED-DAT command to set the current date and time on initial power-up will result in erroneous time stamps on alarms and events reported by the MIS card.</li> </ol>		

**Table D. Steps to Delete Equipment from Service and from Database**

STEP	PROCEDURE	COMMAND
1	Log on	ACT-USER
2	Take ports out of service (MRC, PSM, and TO cards only)	RMV-PORT
3	Take cards out of service (standard cards only)	RMV-EQPT
4	Delete ports from system database (standard MRC, PSM, and TO cards only)	DLT-PORT
5	Delete cards from system database (standard cards only)	DLT-EQPT
6	Pull card out of shelf	(None)
7	Log off	CANC-USER

Table E. Steps for Ports Only

STEP	PROCEDURE	COMMAND
1	Enter port into database	ENT-PORT
2	Put port in service	RST-PORT
3	Take port out of service	RMV-PORT
4	Delete port from database	DLT-PORT

Table F. Factory Settings

CATEGORY	ITEM	SETTING
Security	User name	super (has an access level of 5)
	Password	sparky
	SID	TELECOM
Monitoring Thresholds	BPV	13,340
	CRC	13,340
	OOF	1
	MTIE1	300 ns
	MTIE4	300 ns
	MTIE16	350 ns
	MTIE64	450 ns
	MTIE128	650 ns
	MTIE512	1000 ns
	MTIE900	1000 ns
	TDEV1	100 ns
	TDEV4	100 ns
	TDEV16	125 ns
	TDEV64	255 ns
TDEV128	360 ns	



Table F. Factory Settings (Contd)

CATEGORY	ITEM	SETTING
Communications (Notes 1 & 2)	Baud	Port 1: 9600 Port 2: 9600 Port 3: 9600
	Monitoring mode	Port 1: inhibited from viewing messages associated with other ports Port 2: inhibited from viewing messages associated with other ports Port 3: inhibited from viewing messages associated with other ports
	Keep alive	Port 1: inhibited from sending out a COMPLD message Port 2: inhibited from sending out a COMPLD message Port 3: inhibited from sending out a COMPLD message
	Communication type	Port 1: terminal 2 Port 2: terminal 1 Port 3: terminal 2
	End-of-text character	Port 1: 00 (no end-of-text character) Port 2: 00 (no end-of-text character) Port 3: 00 (no end-of-text character)
	Echo	Port 1: echo inhibited Port 2: echo inhibited Port 3: echo inhibited
	Communication priority	Port 1: ALW1 (autonomous messages are always sent out this port) Port 2: ALW1 (autonomous messages are always sent out this port) Port 3: ALW1 (autonomous messages are always sent out this port)
	Hardware flow	External equipment is inhibited from starting and stopping output messages by manipulating the clear-to-send (CTS) lead
	Software flow	User is inhibited from starting and stopping output messages by using Control-s and Control-q key sequences
	Duration	Port 1: 15 minutes Port 2: 15 minutes Port 3: 15 minutes

Notes:

1. The baud rate for port 2 can only be changed by strap settings on the MIS card.
2. Communication parameters which cannot be changed are: character bits = 8 and start bits = 1.

Chart 1. Logon &amp; Logoff

TASK	PROCEDURE
	<p>This chart provides the steps for logging on and logging off the System. The user name and password must have been assigned using the ENT-SECU-USER command unless the factory-supplied user name (super) and password (sparky) are being used. After logging on, if no activity is detected for the time set by the &lt;dur&gt; parameter in the ED-COM command, the user is automatically logged off.</p> <p>Note: The user name and password are case (uppercase/lowercase) sensitive and must be entered exactly as assigned.</p>
Logon	<p>Access level 1 is required to use this command. Enter:</p> <pre>ACT-USER: [&lt;tid&gt;]:&lt;uid&gt;:&lt;ctag&gt;::&lt;pid&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Logoff	<p>Access level 1 is required to use this command. Enter:</p> <pre>CANC-USER: [&lt;tid&gt;]:&lt;uid&gt;:&lt;ctag&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 2. Alarms & Status

TASK	PROCEDURE
<p>This chart provides the steps for silencing audible alarms, and for displaying alarms, conditions, and messages.</p>	
<p>Silence Alarms</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>OPR-ACO-ALL: [&lt;tid&gt;]:&lt;shelf&gt;:&lt;ctag&gt;;</pre> <p>shelf = shelf to which the command is directed:            (null) = master shelf            E1 = expansion shelf 1            E2 = expansion shelf 2            E3 = expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Display All Current Alarms in a Shelf</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-ALM-ALL: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = SHELF</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD &lt;aid&gt;:&lt;ntfcncde&gt;,&lt;condtype&gt;,&lt;service effecting&gt;,&lt;date&gt;,&lt;time&gt;,,&lt;conddescr&gt;," ...</pre> <p>aid = see Table H            ntfcncde = notification code:                CR = critical alarm                MJ = major alarm                MN = minor alarm                NA = not alarmed                NR = not reported</p> <p>condtype = see Table H            service effecting = the effect on service:                SA = service effecting                NSA = not service effecting</p> <p>date = date of the alarm            time = time of the alarm            conddescr = see Table H</p>

Chart 2. Alarms & Status (Contd)

TASK	PROCEDURE
Display Current Alarms of Specified Equipment	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-ALM-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = equipment:</p> <ul style="list-style-type: none"> <li>CLK-a = clock card (a = 1-2)</li> <li>GTI-a = GTI card (a = 1-2)</li> <li>LTI-a = LTI card (a = 1-2)</li> <li>MRC-a = MRC card (a = 1-2)</li> <li>PSM-a = PSM card (a = 1-11)</li> <li>SHELF = shelf (master shelf includes GTI and LTI)</li> <li>TO-a = TO card (a = 1-12) (1-10 for TOTA-5)</li> </ul> <p>Response:</p> <p>If there are no alarms in the specified card, the format is:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre> <p>If there is at least one alarm to report in the specified card, the format is:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD &lt;aid&gt;:&lt;ntfcncde&gt;,&lt;condtype&gt;,&lt;service effecting&gt;, &lt;date&gt;,&lt;time&gt;,,:&lt;conddescr&gt;," ...</pre> <p>aid = see Table H</p> <p>ntfcncde = notification code:</p> <ul style="list-style-type: none"> <li>CR = critical alarm</li> <li>MJ = major alarm</li> <li>MN = minor alarm</li> <li>NA = not alarmed</li> <li>NR = not reported</li> </ul> <p>condtype = see typerep in Table H</p> <p>service effecting = the effect on service:</p> <ul style="list-style-type: none"> <li>SA = service effecting</li> <li>NSA = not service effecting</li> </ul> <p>date = date of the alarm</p> <p>time = time of the alarm</p> <p>conddescr = see Table H</p>

Chart 2. Alarms & Status (Contd)

TASK	PROCEDURE
Display Current Conditions of All Equipment in a Shelf	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-COND-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = SHELF (master shelf includes GTI and LTI)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   &lt;aid&gt;:&lt;ntfncncl&gt;,&lt;typerep&gt;,&lt;service effecting&gt;,&lt;conddescr&gt;," ...</pre> <p>aid = see Table H</p> <p>ntfncncl = notification code:</p> <ul style="list-style-type: none"> <li>CR = critical alarm</li> <li>MJ = major alarm</li> <li>MN = minor alarm</li> <li>NA = not alarmed</li> <li>NR = not reported</li> </ul> <p>typerep = see Table A in the Input/Output Reference Guide section of this manual, and also see condtype in Table H</p> <p>service effecting = the effect on service:</p> <ul style="list-style-type: none"> <li>SA = service effecting</li> <li>NSA = not service effecting</li> </ul> <p>conddescr = see Table H</p>

Chart 2. Alarms & Status (Contd)

TASK	PROCEDURE
<p>Display Current Conditions of Specified Equipment</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-COND-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = equipment:            CLK-a = clock card (a = 1-2)            GTI-a = GTI card (a = 1-2)            LTI-a = LTI card (a = 1-2)            MRC-a = MRC card (a = 1-2)            PSM-a = PSM card (a = 1-11)            TO-a = TO card (a = 1-12) (1-10 for TOTA-5)</p> <p>Response:</p> <pre>M &lt;sid&gt; &lt;date&gt; &lt;time&gt;   &lt;ctag&gt; COMPLD   &lt;aid&gt;:&lt;ntfcncde&gt;,&lt;typerep&gt;,&lt;service effecting&gt;,&lt;conddescr&gt;," ...</pre> <p>aid = see Table H            ntfcncde = notification code:                CR = critical alarm                MJ = major alarm                MN = minor alarm                NA = not alarmed                NR = not reported            typerep = see Table A in the Input/Output Reference Guide section of this manual, and also see condtype in Table H            service effecting = the effect on service:                SA = service effecting                NSA = not service effecting            conddescr = see Table H</p>

Chart 2. Alarms & Status (Contd)

TASK	PROCEDURE
<p>Display Current Alarms of Specified Ports</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-ALM-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = port:  MRC-a-b[&amp;&amp;-c]:  a = MRC card (a = 1-2)  b = port (b = 1-4 or ALL)  c = ending port (2-4 with c &gt; b)  PSM-a-b[&amp;&amp;-c]:  a = PSM card (a = 1-11)  b = port (b = 1-4 or ALL)  c = ending port (2-4 with c &gt; b)  TO-a-b[&amp;&amp;-c]:  a = TO card (a = 1-12) (1-10 for TOTA-5)  b = port (b = 1-10 or ALL)  c = ending port (2-10 with c &gt; b)</p> <p>Response:</p> <p>If there are no port alarms on the specified card, the format is:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre> <p>If there is at least one port alarm on the specified card, the format is:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD &lt;aid&gt;:&lt;ntfcncde&gt;,&lt;condtype&gt;,&lt;service effecting&gt;,&lt;date&gt;,&lt;time&gt;,&lt;conddescr&gt;," ...</pre> <p>aid = see Table H  ntfcncde = notification code:  CR = critical alarm  MJ = major alarm  MN = minor alarm  NA = not alarmed  NR = not reported</p> <p>condtype = see typerep in Table H  service effecting = the effect on service:  SA = service effecting  NSA = not service effecting</p> <p>date = date of the alarm  time = time of the alarm  conddescr = see Table H</p>

Chart 2. Alarms & Status (Contd)

TASK	PROCEDURE
<p>Display Current Conditions of Specified Ports</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-COND-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = port:  MRC-a-b[&amp;&amp;-c]:  a = MRC card (a = 1-2)  b = port (b = 1-4 or ALL)  c = ending port (2-4 with c &gt; b)  PSM-a-b[&amp;&amp;-c]:  a = PSM card (a = 1-11)  b = port (b = 1-4 or ALL)  c = ending port (2-4 with c &gt; b)  TO-a-b[&amp;&amp;-c]:  a = TO card (a = 1-12) (1-10 for TOTA-5)  b = port (b = 1-10 or ALL)  c = ending port (2-10 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD &lt;aid&gt;:&lt;ntfcncde&gt;,&lt;typerep&gt;,&lt;service effecting&gt;,&lt;conddescr&gt;," ...</pre> <p>aid = see Table H  ntfcncde = notification code:  CR = critical alarm  MJ = major alarm  MN = minor alarm  NA = not alarmed  NR = not reported  typerep = see Table A in the Input/Output Reference Guide section of this manual, and also see condtype in Table H  service effecting = the effect on service:  SA = service effecting  NSA = not service effecting  conddescr = see Table H</p>



Chart 2. Alarms & Status (Contd)

TASK	PROCEDURE								
<p>Display Message Log</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-LOG: [&lt;tid&gt;] :&lt;shelf&gt;:&lt;ctag&gt;::LOG;</pre> <p>shelf = shelf from which log will be displayed:</p> <table border="0"> <tr> <td>(null)</td> <td>= master shelf</td> </tr> <tr> <td>E1</td> <td>= expansion shelf 1</td> </tr> <tr> <td>E2</td> <td>= expansion shelf 2</td> </tr> <tr> <td>E3</td> <td>= expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)</td> </tr> </table> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   "LOG"   /*   "&lt;sid&gt;:&lt;ocrdat&gt; &lt;ocrtm&gt; &lt;aid&gt;:&lt;ntfcncde&gt;,&lt;cond-   type&gt;,"                                 &lt;srveff&gt;:/* &lt;conddescr&gt; */" ...   "&lt;sid&gt;:&lt;ocrdat&gt; &lt;ocrtm&gt; &lt;aid&gt;:&lt;condtype&gt;,&lt;condeff&gt;:"                                 /* &lt;conddescr&gt; */" ...   */</pre> <p>Notes:</p> <ol style="list-style-type: none"> <li>The line shown as "&lt;date&gt; &lt;time&gt;" in the response format will show an arbitrary date and time when the RTRV-LOG command is used without having ever used the INIT-LOG command. After the INIT-LOG command has been used, that line will appear as follows: <pre>"&lt;date&gt; &lt;time&gt; INIT-LOG:::&lt;ctag&gt;::LOG"</pre> <p>where the date and time shown are the date and time when the INIT-LOG command was entered.</p> </li> <li>The next-to-the-last line in the response format (begins with "&lt;sid&gt;") is the format for an alarm in the log.</li> <li>The last line in the response format (also begins with "&lt;sid&gt;") is the format for an event in the log.</li> </ol>	(null)	= master shelf	E1	= expansion shelf 1	E2	= expansion shelf 2	E3	= expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)
(null)	= master shelf								
E1	= expansion shelf 1								
E2	= expansion shelf 2								
E3	= expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)								

Chart 2. Alarms & Status (Contd)

TASK	PROCEDURE
<p>Clear Message Log</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>INIT-LOG: [&lt;tid&gt;] :&lt;shelf&gt;:&lt;ctag&gt;::LOG;</pre> <p>shelf = shelf where log will be initialized:</p> <ul style="list-style-type: none"> <li>(null) = master shelf</li> <li>E1 = expansion shelf 1</li> <li>E2 = expansion shelf 2</li> <li>E3 = expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)</li> </ul> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 3. Security

TASK	PROCEDURE
	<p>This chart provides the steps for displaying and changing security parameters. As shipped from the factory, there is one user named “super” with a password of “sparky” and an access level of 5. For password protection to be enabled, section 4 of switch SW1 on the MIS card must be set to the ON position.</p> <p>Note: The user name and password are case (uppercase/lowercase) sensitive and must be entered exactly as assigned.</p>
<p>Display Access Level of a Single User</p>	<p>Access level 5 is required to use this command. This command is directed to the master shelf only. Enter:</p> <pre>RTRV-USER-SECU: [&lt;tid&gt;]:&lt;uid&gt;:&lt;ctag&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMLPD   &lt;uid&gt;:,&lt;access level&gt;</pre>
<p>Display Access Level of All Users</p>	<p>Access level 5 is required to use this command. This command is directed to the master shelf only. Enter:</p> <pre>RTRV-USER-SECU: [&lt;tid&gt;]:ALL:&lt;ctag&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMLPD   &lt;uid&gt;:,&lt;access level&gt; ...</pre>
<p>Assign User</p>	<p>Access level 5 is required to use this command. This command is directed to the master shelf only. This command enters a new user into the system. A maximum of 16 users can be assigned. Enter:</p> <pre>ENT-USER-SECU: [&lt;tid&gt;]:&lt;uid&gt;:&lt;ctag&gt;::&lt;password&gt;,,                                      &lt;access level&gt;;</pre> <p>uid = name of new user (up to 10 alpha-numeric characters)  password = password for new user (see note below)  access level = access level of new user (1–5 with 5 the highest)</p> <p><b>Note:</b> The password can have a minimum of 1 character and a maximum of 10 characters. At least one alpha character must be used. Alpha characters can be uppercase, lowercase, or a mixture of both. Any printable character can be used except: comma (,), colon (:), semicolon (;), null (), space ( ), ampersand (&amp;), and equal sign (=).</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMLPD</pre>

Chart 3. Security (Contd)

TASK	PROCEDURE
Change Password	<p>Access level 1 is required to use this command. This command is directed to the master shelf only. This command changes a user's password. Enter:</p> <pre>ED-PID: [&lt;tid&gt;]:&lt;uid&gt;:&lt;ctag&gt;::&lt;pid&gt;,&lt;new pid&gt;;</pre> <p>uid = name of user whose password is being changed  pid = existing password  new pid = new password (see note below)</p> <p><b>Note:</b> The password can have a minimum of 1 character and a maximum of 10 characters. At least one alpha character must be used. Alpha characters can be uppercase, lowercase, or a mixture of both. Any printable character can be used except: comma (,), colon (:), semicolon (;), null (), space ( ), ampersand (&amp;), and equal sign (=). Also, the following key words cannot be used: "E1", "E2", "E3", or "NO".</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Change User Name, Password, & Access Level	<p>Access level 5 is required to use this command. This command is directed to the master shelf only. Enter:</p> <pre>ED-USER-SECU: [&lt;tid&gt;]:&lt;uid&gt;:&lt;ctag&gt;::&lt;new uid&gt;,&lt;new pid&gt; , ,&lt;uap&gt;;</pre> <p>uid = name of user whose name, password, and/or access level is being changed  new uid = new user name (up to 10 alpha-numeric characters)  new pid = new password (see note below)  uap = new access level (1–5 with 5 the highest)</p> <p><b>Note:</b> The password can have a minimum of 1 character and a maximum of 10 characters. At least one alpha character must be used. Alpha characters can be uppercase, lowercase, or a mixture of both. Any printable character can be used except: comma (,), colon (:), semicolon (;), null (), space ( ), ampersand (&amp;), and equal sign (=). Also, the following key words cannot be used: "E1", "E2", "E3", or "NO".</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 3. Security (Contd)

TASK	PROCEDURE
Delete User	<p>Access level 5 is required to use this command. This command is directed to the master shelf only. Enter:</p> <pre>DLT-USER-SECU: [&lt;tid&gt;]:&lt;uid&gt;:&lt;ctag&gt;;</pre> <p>uid = name of user being deleted</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 4. Communication Ports

TASK	PROCEDURE
<p>This chart provides the steps for displaying and changing the communication parameters.</p>	
<p>Display Communication Parameters</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-COM: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = communication port number (COM-1, COM-2, COM-3, or COM-ALL)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;" ... /*BAUD=&lt;value&gt;,MONMSG=&lt;value&gt;,KEEPALIVE=&lt;value&gt;, COMTYPE=&lt;value&gt;,ENDOFTEXT=&lt;value&gt;,ECHO=&lt;value&gt;, COMPRI=&lt;value&gt;,HWCONTROL=&lt;value&gt;, SWCONTROL=&lt;value&gt;,LOGOFF=&lt;value&gt;, DUR=&lt;value&gt;...*/</pre> <p>baud = data rate (baud rate) for this communication port:  9600 = 9600 baud  1200 = 1200 baud</p> <p>monmsg = specifies whether this communication port is allowed to view communication messages associated with other ports:  ALW = allowed  INH = inhibited</p> <p>keepalive = specifies whether this communication port is allowed to autonomously output a COMPL messages every 15 to 20 minutes:  ALW = allowed  INH = inhibited</p> <p>comtype = communication type for this communication port:  X25 = PAD  MODEM = modem (Hayes compatible)  TERM1 = dumb terminal (VT100 with no DSR/DTR support and message buffering disabled)  TERM2 = dumb terminal (VT100 with DSR/DTR support and message buffering enabled)  REMOTE = remote shelf</p> <p>endoftext = specifies an additional end-of-text character for this communication port:  00 = no additional end-of-text character  x = the additional end-of-text character which is a hexadecimal number (x = 1-9F)</p> <p>echo = specifies whether this communication port allows local echo:  ALW = allowed  INH = inhibited</p>

Chart 4. Communication Ports (Contd)

TASK	PROCEDURE	
Display Communication Parameters (Contd)	<p>compri</p> <p>hwcontrol</p> <p>swcontrol</p> <p>dur</p>	<p>= specifies whether alarm and event messages are allowed to be transmitted from this communication port:                      INH = communication through a port with this designation is inhibited (INH is not allowed on COM2)                      ALW0 = allows normal communication; autonomous messages are not sent out a port with this priority                      ALW1 = allows normal communication; autonomous messages are always sent out this port regardless of the priorities of the other ports (this is the highest port priority)                      ALW2 = allows normal communication; autonomous messages are sent out this port only if there are no ports with a priority level of ALW1 (this is the second-highest port priority)                      ALW3 = allows normal communication; autonomous messages are sent out this port only if there are no ports with a priority level of ALW1 or ALW2 (this is the lowest port priority)</p> <p>= specifies whether external equipment is allowed to stop the DCD system from sending messages by setting the clear to send (CTS) lead low, or continue messages by setting the CTS lead high on this communication port:                      ALW = allowed                      INH = inhibited</p> <p>= specifies whether user is allowed to use a Control-s key combination to stop the DCD system from sending messages or use a Control-q key combination to cause the DCD system to continue sending messages via this communication port:                      ALW = allowed                      INH = inhibited</p> <p>= specifies the amount of time (1–45 minutes) after which the user is logged off if there is no activity.</p>

Chart 4. Communication Ports (Contd)

TASK	PROCEDURE
<p>Change Communication Parameters</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>ED-COM: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: [&lt;baud&gt;], [&lt;monmsg&gt;],         [&lt;keepalive&gt;], [&lt;comtype&gt;], [&lt;endoftext&gt;], [&lt;echo&gt;],         [&lt;compri&gt;], [&lt;hwcontrol&gt;], [&lt;swcontrol&gt;], [&lt;dur&gt;];</pre> <p>aid = communication port number (COM-1, COM-2, COM-3)</p> <p>baud = data rate (baud rate) for this communication port (baud rate for port 2 can only be changed by a switch on the MIS card):</p> <pre>9600 = 9600 baud 1200 = 1200 baud (null) = no change</pre> <p>monmsg = specifies whether this communication port is allowed to view communication messages associated with other ports:</p> <pre>ALW = allowed INH = inhibited (null) = no change</pre> <p>keepalive = specifies whether this communication port is allowed to autonomously output a COMPL messages every 15 to 20 minutes:</p> <pre>ALW = allowed INH = inhibited (null) = no change</pre> <p>comtype = communication type for this communication port:</p> <pre>X25 = PAD MODEM = modem (Hayes compatible) TERM1 = dumb terminal (VT100 with no DSR/DTR support and message buffering disabled) TERM2 = dumb terminal (VT100 with DSR/DTR support and message buffering enabled) REMOTE = remote shelf</pre> <p>endoftext = specifies an additional end-of-text character for this communication port:</p> <pre>00 = no additional end-of-text character x = the additional end-of-text character which is a hexadecimal number (0-9F) (null) = no change</pre> <p>echo = specifies whether this communication port allows local echo:</p> <pre>ALW = allowed INH = inhibited (null) = no change</pre>



Chart 4. Communication Ports (Contd)

TASK	PROCEDURE
<p>Change Communication Parameters (Contd)</p>	<p>compri = specifies whether alarm and event messages are allowed to be transmitted from this communication port:                      INH = communication through a port with this designation is inhibited (INH is not allowed on COM2)                      ALW0 = allows normal communication; autonomous messages are not sent out a port with this priority level                      ALW1 = allows normal communication; autonomous messages are always sent out this port regardless of the priorities of the other ports (this is the highest port priority)                      ALW2 = allows normal communication; autonomous messages are sent out this port only if there are no ports with a priority level of ALW1 (this is the second-highest port priority)                      ALW3 = allows normal communication; autonomous messages are sent out this port only if there are no ports with a priority level of ALW1 or ALW2 (this is the lowest port priority)                      (null) = no change</p> <p>hwcontrol = specifies whether external equipment is allowed to stop the DCD system from sending messages by setting the clear to send (CTS) lead low, or continue messages by setting the CTS lead high:                      ALW = allowed                      INH = inhibited                      (null) = no change</p> <p>swcontrol = specifies whether user is allowed to use a Control-s key combination to stop the DCD system from sending messages, or use a Control-q key combination to cause the DCD system to continue sending messages via this communication port:                      ALW = allowed                      INH = inhibited                      (null) = no change</p> <p>dur = specifies the amount of time (1–45 minutes) after which the user is logged off if there is no activity.</p> <p>Response:                      &lt;sid&gt; &lt;date&gt; &lt;time&gt;                      M &lt;ctag&gt; COMPLD</p>

Chart 4. Communication Ports (Contd)

TASK	PROCEDURE
Drop DTR Signal for 5 Seconds	<p>Access level 3 is required to use this command. If a port is provision for TERM1 (no DSR/DTR support), the command will indicate completed but no action will occur. Enter:</p> <pre>INIT-COM: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = communication port number (COM-1, COM-2, COM-3, or COM-ALL)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 5. System Configuration

TASK	PROCEDURE
	<p>This chart provides the steps for displaying the date &amp; time and changing the date &amp; time. Steps are included for displaying and changing the system name, and how to reset the system database. Also included is a step for displaying the MIS card software revision. The system name is set at the factory to TELECOM. The system name is entered (optional) as the target identifier (tid) and is included with every response from the system as the source identifier (sid).</p> <p>Refer to Part 4, Shelf Addressing, for expansion or remote shelf addressing details.</p>
<p>Display Date &amp; Time</p>	<p>Access level 1 is required to use this command. This command is directed to the master shelf only. Enter:</p> <pre>RTRV-HDR: [&lt;tid&gt;] :: &lt;ctag&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Change Date &amp; Time</p>	<p>Access level 4 is required to use this command. This command is directed to the master shelf only. If connected to a GTI card, the system will adjust the minutes and seconds to coincide with UTC time. The current hour (entered with &lt;time&gt;) will be used so that local time is displayed. Enter:</p> <pre>ED-DAT: [&lt;tid&gt;] :: &lt;ctag&gt; :: { &lt;date&gt;, &lt;time&gt; };</pre> <p>date = date in the format yyyy-mm-dd:            yyyy = year (1997–2096)            mm = month (01–12)            dd = day (01–31)</p> <p>time = time in the format hh-mm-ss:            hh = hour (00–23)            mm = minute (00–59)            ss = second (00–59)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 5. System Configuration (Contd)

TASK	PROCEDURE
<p>Display Memory Bank Being Used for MIS Card Program</p>	<p>Access level 2 is required to use this command. This command displays the MIS card inventory and the program memory bank (low bank or hi bank) in use. Enter:</p> <pre>RTRV-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;; aid = ADMIN</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;" /* CARD=&lt;value&gt;, TYPE=&lt;value&gt;, PART=&lt;value&gt;, CLEI=&lt;value&gt;, SERIAL=&lt;value&gt;, HARDREV=&lt;value&gt;, LOW_BANK_SW=&lt;value&gt;: SOFTREV=&lt;value&gt;, SOFTVER=&lt;value&gt;, HI_BANK_SW=&lt;value&gt;: SOFTREV=&lt;value&gt;, SOFTVER=&lt;value&gt; */</pre> <p>Note: The word (ACTIVE or INACTIVE) following the LOW_BANK_SW= and the HI_BANK_SW= fields indicate which memory bank is in use (ACTIVE = in use, INACTIVE = not in use).</p>

Chart 5. System Configuration (Contd)

TASK	PROCEDURE
<p>Change to Alternate MIS Card Program</p>	<p><b>Caution: If section 5 of SW1 on the MIS card is set to ON, the following command will retain the card database in the MIS card and this card database will be downloaded from the MIS card to all other cards. If section 5 of SW1 on the MIS card is set to OFF, the following command will retain the card database in the MIS card, but this card database will <u>not</u> be downloaded from the MIS card to all other cards.</b></p> <p>Access level 5 is required to use this command. This command causes the MIS card to use the alternate MIS card program (if one is available) which may take up to 5 minutes. This command does not affect the SID, security, or communication port parameters. Enter:</p> <pre>INIT-SYS: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::5; aid = MIS</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Delete Card Database in MIS Card</p>	<p><b>Caution: The following command will delete the card database in the MIS card.</b></p> <p>Access level 5 is required to use this command. This command deletes the card database in the MIS card. This command does not affect the SID, security, or communication port parameters. Enter:</p> <pre>INIT-SYS: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::3; aid = MIS</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 5. System Configuration (Contd)

TASK	PROCEDURE
Reset MIS Card	<p><b>Caution:</b> <i>If section 5 of SW1 on the MIS card is set to ON, the following command will retain the card database in the MIS card and this card database will be downloaded from the MIS card to all other cards. If section 5 of SW1 on the MIS card is set to OFF, the following command will retain the card database in the MIS card, but this card database will <u>not</u> be downloaded from the MIS card to all other cards.</i></p> <p>Access level 5 is required to use this command. This command causes the MIS card to perform a soft reset. This command does not affect the SID, security, or communication port parameters. Enter:</p> <pre>INIT-SYS: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::4;</pre> <p style="padding-left: 40px;">aid                   = MIS</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Completely Reset MIS Card to Factory Settings	<p><b>Caution:</b> <i>The following command will delete the card database in the MIS card and reset all SID, security, and communication port parameters to the factory settings.</i></p> <p>Access level 5 is required to use this command. This command deletes all card information (no cards will be entered in the database); resets all security information and the source ID (SID) to the factory settings (there will be only one user named “super” with a password of “sparky”, and the DCD system SID will be TELECOM); and resets all communication parameters to factory settings. Enter:</p> <pre>INIT-SYS: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::9;</pre> <p style="padding-left: 40px;">aid                   = MIS</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Display System Name	<p>Access level 1 is required to use this command. This command is directed to the master shelf only. Enter:</p> <pre>RTRV-HDR: [&lt;tid&gt;] ::&lt;ctag&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 5. System Configuration (Contd)

TASK	PROCEDURE
<p>Change System Name</p>	<p>Access level 4 is required to use this command. This command is directed to the master shelf only. This command changes the source identifier for a system. Enter:</p> <pre>SET-SID:&lt;tid&gt;::&lt;ctag&gt;::&lt;sid&gt;;</pre> <p>tid = old source identifier of the system  sid = new source identifier of the system (20 characters max using letters, numbers, and hyphens; the source identifier must begin with a letter; the target's CLLI code [if available] is recommended as the source identifier, or the office name can be used)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 5. System Configuration (Contd)

TASK	PROCEDURE
<p>Display Equipment</p>	<p>Access level 2 is required to use this command. This command displays equipped cards. Nonstandard cards must have been entered with the ENT-INVENTORY command (cards not entered will show blank fields). Standard cards are automatically entered in the database with the ENT-EQPT command. Enter:</p> <pre>RTRV-INVENTORY:&lt;tid&gt;:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = specific equipment locations:</p> <ul style="list-style-type: none"> <li>ADMIN = MIS card slot</li> <li>CLOCK-a = clock slot (a = 1-2)</li> <li>INPUT-a = input slot (a = 1-2)</li> <li>OUTPUT-a = output slot (used for timing output cards, monitoring cards, and clock insertion cards) (a = 1-12)</li> <li>PROT = protection controller slot</li> <li>PRS-a = LPR shelf (a = 1-2)</li> <li>SHELF = all equipment locations (PRS included with master shelf)</li> </ul> <p>Response:</p> <p><u>For MIS card:</u></p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   "&lt;aid&gt;"   /*   CARD=&lt;value&gt;,   TYPE=&lt;value&gt;,   PART=&lt;value&gt;,   CLEI=&lt;value&gt;,   SERIAL=&lt;value&gt;,   HARDREV=&lt;value&gt;,   LOW_BANK_SW=&lt;value&gt;:     SOFTREV=&lt;value&gt;,     SOFTVER=&lt;value&gt;,   HI_BANK_SW=&lt;value&gt;:     SOFTREV=&lt;value&gt;,     SOFTVER=&lt;value&gt;   */...</pre> <p><b>Note:</b> Information about the ADMIN slot shows information for the high-bank and low-bank program memory locations. One of these locations will be active and the other will be inactive.</p>



Chart 5. System Configuration (Contd)

TASK	PROCEDURE
Display Equipment (Contd)	Response (Contd):  <u>For cards other than MIS:</u>  <pre>                     &lt;sid&gt; &lt;date&gt; &lt;time&gt;                     M &lt;ctag&gt; COMPLD                       "&lt;aid&gt;"                       /*                       CARD=&lt;value&gt;,                       TYPE=&lt;value&gt;,                       PART=&lt;value&gt;,                       CLEI=&lt;value&gt;,                       SERIAL=&lt;value&gt;,                       HARDREV=&lt;value&gt;,                       SOFTREV=&lt;value&gt;,                       SOFTVER=&lt;value&gt;                       */...</pre>

Chart 6. Enter into the Database and Put In Service a Standard Card

TASK	PROCEDURE
	<p>This chart provides the steps for entering standard cards into the system database using factory-set parameters. After using the commands in this chart , the card will be entered in the database, the card will be in service, and all ports associated with the card (if any) will be entered and in service.</p>
Enter and Restore Clock Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>ENT-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = clock card slot (CLK-1 or CLK-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Enter and Restore GTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>ENT-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = GTI card slot (GTI-1 or GTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Enter and Restore LTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>ENT-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = LTI card slot (LTI-1 or LTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Enter and Restore MRC Card and Ports	<p>Access level 4 is required to use this command. Enter:</p> <pre>ENT-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card slot (MRC-1 or MRC-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 6. Enter into the Database and Put In Service a Standard Card (Contd)

TASK	PROCEDURE
Enter and Restore PSM Card and Ports	<p>Access level 4 is required to use this command. Enter:</p> <pre>                     ENT-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;                     aid                = PSM card slot (PSM-x, where x = 1-11)                 </pre> <p>Response:</p> <pre>                     &lt;sid&gt; &lt;date&gt; &lt;time&gt;                     M &lt;ctag&gt; COMPLD                 </pre>
Enter and Restore Timing Output Card and Ports	<p>Access level 4 is required to use this command. This commands enters TO-EA and TOTA-5 cards only. Enter:</p> <pre>                     ENT-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;                     aid                = TO card slot (TO-x, where x = 1-12 [1-10 for TOTA-5])                 </pre> <p>Response:</p> <pre>                     &lt;sid&gt; &lt;date&gt; &lt;time&gt;                     M &lt;ctag&gt; COMPLD                 </pre>

Chart 7. Put Standard Card In Service

TASK	PROCEDURE
This chart provides the steps for putting standard cards into service. Once in service, cards can report alarm and conditions.	
Restore Clock Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RST-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = clock card slot (CLK-1 or CLK-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Restore GTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RST-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = GTI card slot (GTI-1 or GTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Restore LTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RST-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:::;:</pre> <p>aid = LTI card slot (LTI-1 or LTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Restore MRC Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RST-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card slot (MRC-1 or MRC-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 7. Put Standard Card In Service (Contd)

TASK	PROCEDURE
Restore PSM Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RST-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = PSM card slot (PSM-x, where x = 1-11)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Restore Timing Output Card	<p>Access level 4 is required to use this command. When a timing output card is restored (put in service), its outputs are enabled. Enter:</p> <pre>RST-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = TO card slot (TO-x, where x = 1-12 [1-10 for TOTA-5])</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 8. Take Standard Card Out of Service

TASK	PROCEDURE
	<p>This chart provides the steps for taking standard cards out of service. When out of service, cards can no longer report alarms and conditions.</p> <p><b>Prerequisite:</b> Before MRC, PSM, or timing output cards can be taken out of service, all the ports associated with the card must be taken out of service. Refer to Chart 14 (Reference Input Ports), Chart 15 (Monitor Input Ports), or Chart 16 (Timing Output Ports) for the procedure to take ports out of service.</p>
Remove Clock Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RMV-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = clock card slot (CLK-1 or CLK-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Remove GTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RMV-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = GTI card slot (GTI-1 or GTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Remove LTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RMV-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = LTI card slot (LTI-1 or LTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Remove MRC Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>RMV-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card slot (MRC-1 or MRC-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 8. Take Standard Card Out of Service (Contd)

TASK	PROCEDURE
Remove PSM Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>                     RMV-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;                     aid                = PSM card slot (PSM-x, where x = 1-11)                 </pre> <p>Response:</p> <pre>                     &lt;sid&gt; &lt;date&gt; &lt;time&gt;                     M &lt;ctag&gt; COMPLD                 </pre>
Remove Timing Output Card	<p>Access level 4 is required to use this command. When a timing output card is removed (taken out of service), its outputs are disabled. Enter:</p> <pre>                     RMV-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;                     aid                = TO card slot (TO-x, where x = 1-12 [1-10 for TOTA-5])                 </pre> <p>Response:</p> <pre>                     &lt;sid&gt; &lt;date&gt; &lt;time&gt;                     M &lt;ctag&gt; COMPLD                 </pre>

## Chart 9. Delete Standard Card from Database

TASK	PROCEDURE
	<p>This chart provides the steps for deleting standard cards from the system database.</p> <p><b>Prerequisite:</b> Before MRC, PSM, or timing output cards can be deleted from the database, all the ports associated with the card must be deleted from the database. Refer to Chart 14 (Reference Input Ports), Chart 15 (Monitor Input Ports), or Chart 16 (Timing Output Ports) for the procedure to delete ports from the database.</p>
Delete Clock Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = clock card slot (CLK-1 or CLK-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Delete GTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = GTI card slot (GTI-1 or GTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Delete LTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = LTI card slot (LTI-1 or LTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Delete MRC Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card slot (MRC-1 or MRC-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>



Chart 9. Delete Standard Card from Database (Contd)

TASK	PROCEDURE
Delete PSM Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = PSM card slot (PSM-x, where x = 1-11)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Delete Timing Output Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = TO card slot (TO-x, where x = 1-12 [1-10 for TOTA-5])</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 10. Enter Nonstandard Card in Database

TASK	PROCEDURE
	<p>This chart provides the steps for entering nonstandard cards and standard cards without a database (ST2, ST2E, ST3, ST3E, TNC, TNC-E, and LNC) into the system database. Obtain information about the card from the front panel of the card. If information is not available, leave the associated field in the command empty.</p>
<p>Enter Clock Card</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>ENT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;card&gt;,&lt;part&gt;,&lt;clei&gt;,&lt;serial&gt;,&lt;hardware_revision&gt;,&lt;software_revision&gt;;</pre> <p>aid = clock card slot (CLOCK-1 or CLOCK-2) card = card (LNC, TNC, TNC-E, ST2, ST2E, ST3, or ST3E)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Enter Input Card</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>ENT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;card&gt;,&lt;part&gt;,&lt;clei&gt;,&lt;serial&gt;,&lt;hardware_revision&gt;,&lt;software_revision&gt;;</pre> <p>aid = input card slot (INPUT-1 or INPUT-2) card = card (ACI, CI, CI-EA, or ECI)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Enter Output Card</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>ENT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;card&gt;,&lt;part&gt;,&lt;clei&gt;,&lt;serial&gt;,&lt;hardware_revision&gt;,&lt;software_revision&gt;;</pre> <p>aid = output card slot (OUTPUT-x, where x = 1-12) card = card (TOAA, TOCA, TOEA, TO-EA, TOGA, TOLA, TOTA, TOTL,SCIU, or ESCIU)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 10. Enter Nonstandard Card in Database (Contd)

TASK	PROCEDURE
<p>Enter Protection Card</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre> ENT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::MCA-5,&lt;part&gt;,                 &lt;clei&gt;,&lt;serial&gt;,&lt;hardware_revision&gt;,                 &lt;software_revision&gt;;                  aid                = protection card slot (PROT)             </pre> <p>Response:</p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD             </pre>
<p>Enter PRS Card</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre> ENT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;card&gt;,&lt;part&gt;,                 &lt;clei&gt;,&lt;serial&gt;,&lt;hardware_revision&gt;,                 &lt;software_revision&gt;;                  aid                = PRS card slot (PRS-1 or PRS-2)                 card                = LOU-1, LOU-2, or LTI             </pre> <p>Response:</p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD             </pre>

Chart 11. Edit Nonstandard Card Information

TASK	PROCEDURE
	<p>This chart provides the steps for editing the information for nonstandard cards and Version 5 cards without a database (ST2, ST2E, ST3, ST3E, TNC, TNC-E, and LNC). Omit those parameters not being changed.</p>
Edit Clock Card	<p>Access level 3 is required to use this command. Enter:</p> <pre>ED-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: [&lt;card&gt;], [&lt;part&gt;],                [&lt;clei&gt;], [&lt;serial&gt;], [&lt;hardware_revision&gt;],                [&lt;software_revision&gt;;</pre> <p>aid = clock card slot (CLOCK-1 or CLOCK-2)  card = card (LNC, TNC, TNC-E, ST2, ST2E, ST3, or ST3E)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Edit Input Card	<p>Access level 3 is required to use this command. Enter:</p> <pre>ED-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: [&lt;card&gt;], [&lt;part&gt;],                [&lt;clei&gt;], [&lt;serial&gt;], [&lt;hardware_revision&gt;],                [&lt;software_revision&gt;;</pre> <p>aid = input card slot (INPUT-1 or INPUT-2)  card = card (ACI, CI, CI-EA, or ECI)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Edit Output Card	<p>Access level 3 is required to use this command. Enter:</p> <pre>ED-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: [&lt;card&gt;], [&lt;part&gt;],                [&lt;clei&gt;], [&lt;serial&gt;], [&lt;hardware_revision&gt;],                [&lt;software_revision&gt;;</pre> <p>aid = output card slot (OUTPUT-x, where x = 1-12)  card = card (TOAA, TOCA, TOEA, TO-EA, TOGA, TOLA, TOTA, TOTL,SCIU, or ESCIU)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 11. Edit Nonstandard Card Information (Contd)

TASK	PROCEDURE
<p>Edit Protection Card</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>ED-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::MCA-5, [&lt;part&gt;],                 [&lt;clei&gt;], [&lt;serial&gt;], [&lt;hardware_revision&gt;],                 [&lt;software_revision&gt;];</pre> <p>aid = protection card slot (PROT)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Edit PRS Card</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>ED-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: [&lt;card&gt;], [&lt;part&gt;],                 [&lt;clei&gt;], [&lt;serial&gt;], [&lt;hardware_revision&gt;],                 [&lt;software_revision&gt;];</pre> <p>aid = PRS card slot (PRS-1 or PRS-2) card = LOU-1, LOU-2, or LTI</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 12. Delete Nonstandard Card from Database

TASK	PROCEDURE
This chart provides the steps for deleting nonstandard cards from the system database.	
Delete Clock Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = clock card slot (CLOCK-1 or CLOCK-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Delete Input Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = input card slot (INPUT-1 or INPUT-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Delete Output Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = output card slot (OUTPUT-x, where x = 1-12)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Delete Protection Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = protection card slot (PROT)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 12. Delete Nonstandard Card from Database (Contd)

TASK	PROCEDURE
Delete LTI Card	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-INVENTORY: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = PRS card slot (PRS-1 or PRS-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 13. Standard Card Configuration

TASK	PROCEDURE
	<p>This chart provides the steps for displaying and changing parameters on the GTI, MRC, and timing output cards.</p> <p><b>Note:</b> No information is returned for clock cards, PSM cards, or LTI cards; therefore, individual commands for these cards have not been included in this chart.</p>
<p>Display Parameters for All Cards</p>	<p>Access level 2 is required to use this command. Enter:</p> <pre>RTRV-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = SHELF (GTI included with master shelf)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;: [&lt;framing&gt;], [&lt;troublecode&gt;],       [&lt;portseverity&gt;], [&lt;osc1&gt;], [&lt;osc2&gt;],       [&lt;integration&gt;]" ...</pre> <p>framing = framing type:  CAS = channel assigned signaling  CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4  CRC4 = frame alignment sequence framing with cyclic redundancy check 4  D4 = D4 framing format  ESF = ESF framing format  FAS = frame alignment sequence framing</p> <p>troublecode = output signals when card has major alarm:  ALW = AIS is sent on all outputs  INH = all outputs are squelched</p> <p>osc1 = clock type on oscillator 1 (OSC A) input:  RB = rubidium  QTZ = quartz  NONE = oscillator 1 is not equipped</p> <p>osc2 = clock type on oscillator 2 (OSC B) input:  RB = rubidium  QTZ = quartz  NONE = oscillator 2 is not equipped</p> <p>integration = integration time until an alarm is declared:  1 = see Table G  2 = see Table G  3 = see Table G  4 = see Table G</p>



Chart 13. Standard Card Configuration (Contd)

TASK	PROCEDURE
Display GTI Card Parameters	<p>Access level 2 is required to use this command. Enter:</p> <pre>RTRV-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = GTI card slot (GTI-1 or GTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:&lt;framing&gt;,&lt;troublecode&gt;,,&lt;osc1&gt;,&lt;osc2&gt; , &lt;integration&gt;" ...</pre> <p>framing = framing type:</p> <ul style="list-style-type: none"> <li>CAS = channel assigned signaling</li> <li>CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4</li> <li>CRC4 = frame alignment sequence framing with cyclic redundancy check 4</li> <li>D4 = D4 framing format</li> <li>ESF = ESF framing format</li> <li>FAS = frame alignment sequence framing</li> </ul> <p>troublecode = output signals when card has major alarm:</p> <ul style="list-style-type: none"> <li>ALW = AIS is sent on all outputs</li> <li>INH = all outputs are squelched</li> </ul> <p>osc1 = clock type on oscillator 1 (OSC A) input:</p> <ul style="list-style-type: none"> <li>RB = rubidium</li> <li>QTZ = quartz</li> </ul> <p>osc2 = clock type on oscillator 2 (OSC B) input:</p> <ul style="list-style-type: none"> <li>RB = rubidium</li> <li>QTZ = quartz</li> </ul> <p>integration = integration time until an alarm is declared:</p> <ul style="list-style-type: none"> <li>1 = see Table G</li> <li>2 = see Table G</li> <li>3 = see Table G</li> <li>4 = see Table G</li> </ul>

Chart 13. Standard Card Configuration (Contd)

TASK	PROCEDURE
<p>Change GTI Card Parameters</p>	<p>Access level 3 is required to use this command. Enter:</p> <p>ED-</p> <p style="padding-left: 40px;">EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;framing&gt;,&lt;troublecode&gt;,,  <span style="padding-left: 100px;">&lt;osc1&gt;,&lt;osc2&gt;,&lt;integration&gt;;</span></p> <p>aid = GTI card slot (GTI-1 or GTI-2)</p> <p>framing = framing type:  <span style="padding-left: 20px;">CAS = channel assigned signaling</span>  <span style="padding-left: 20px;">CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4</span>  <span style="padding-left: 20px;">CRC4 = frame alignment sequence framing with cyclic redundancy check 4</span>  <span style="padding-left: 20px;">D4 = D4 framing format</span>  <span style="padding-left: 20px;">ESF = ESF framing format</span>  <span style="padding-left: 20px;">FAS = frame alignment sequence framing</span></p> <p>troublecode = output signals when card has major alarm:  <span style="padding-left: 20px;">ALW = AIS is sent on all outputs</span>  <span style="padding-left: 20px;">INH = all outputs are squelched</span></p> <p>osc1 = clock type on oscillator 1 (OSC A) input:  <span style="padding-left: 20px;">RB = rubidium</span>  <span style="padding-left: 20px;">QTZ = quartz</span></p> <p>osc2 = clock type on oscillator 2 (OSC B) input:  <span style="padding-left: 20px;">RB = rubidium</span>  <span style="padding-left: 20px;">QTZ = quartz</span></p> <p>integration = integration time until an alarm is declared:  <span style="padding-left: 20px;">1 = see Table G</span>  <span style="padding-left: 20px;">2 = see Table G</span>  <span style="padding-left: 20px;">3 = see Table G</span>  <span style="padding-left: 20px;">4 = see Table G</span></p> <p>Response:</p> <p style="padding-left: 40px;">&lt;sid&gt; &lt;date&gt; &lt;time&gt;  M &lt;ctag&gt; COMPLD</p>

Chart 13. Standard Card Configuration (Contd)

TASK	PROCEDURE
<p>Display MRC Card Parameters</p>	<p>Access level 2 is required to use this command. Enter:</p> <pre>RTRV-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card slot (MRC-1 or MRC-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:,,,&lt;osc1&gt;,&lt;osc2&gt;," ...</pre> <p>osc1 = clock type on oscillator 1 (OSC A) input:  RB = rubidium  QTZ = quartz  NONE = oscillator 1 is not equipped</p> <p>osc2 = clock type on oscillator 2 (OSC B) input:  RB = rubidium  QTZ = quartz  NONE = oscillator 2 is not equipped</p>
<p>Change MRC Card Parameters</p>	<p>Access level 2 is required to use this command. Enter:</p> <pre>ED-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:,,,&lt;osc1&gt;,&lt;osc2&gt;;</pre> <p>aid = MRC card slot (MRC-1 or MRC-2)</p> <p>osc1 = clock type on oscillator 1 (OSC A) input:  RB = rubidium  QTZ = quartz  NONE = oscillator 1 is not equipped</p> <p>osc2 = clock type on oscillator 2 (OSC B) input:  RB = rubidium  QTZ = quartz  NONE = oscillator 2 is not equipped</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 13. Standard Card Configuration (Contd)

TASK	PROCEDURE
Display Timing Output Card Parameters	<p>Access level 2 is required to use this command. Enter:</p> <p style="padding-left: 40px;">RTRV-EQPT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;</p> <p style="padding-left: 80px;">aid = TO card slot (TO-x, where x = 1–12 [1–10 for TOTA-5])</p> <p>Response:</p> <p style="padding-left: 40px;">&lt;sid&gt; &lt;date&gt; &lt;time&gt;</p> <p style="padding-left: 40px;">M &lt;ctag&gt; COMPLD</p> <p style="padding-left: 40px;">"&lt;aid&gt;:&lt;framing&gt;,&lt;troublecode&gt;,&lt;portseverity&gt;" ...</p> <p style="padding-left: 80px;">framing = framing type:</p> <ul style="list-style-type: none"> <li>CAS = channel assigned signaling</li> <li>CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4</li> <li>CRC4 = frame alignment sequence framing with cyclic redundancy check 4</li> <li>D4 = D4 framing format</li> <li>ESF = ESF framing format</li> <li>FAS = frame alignment sequence framing</li> </ul> <p style="padding-left: 80px;">troublecode = output signals when card fails:</p> <ul style="list-style-type: none"> <li>ALW = AIS is sent on all outputs</li> <li>INH = all outputs are squelched</li> </ul> <p style="padding-left: 120px;"><b>Caution: If any port on the card is set for ANALOG, the troublecode must be set to INH.</b></p> <p style="padding-left: 80px;">portseverity = alarm type caused by port failure:</p> <ul style="list-style-type: none"> <li>MJ = major</li> <li>MN = minor</li> </ul>

Chart 13. Standard Card Configuration (Contd)

TASK	PROCEDURE
<p>Change Timing Output Card Parameters</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>ED-EQPT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::&lt;framing&gt;,&lt;troublecode&gt;,&lt;portseverity&gt;,,,;</pre> <p>aid = TO card slot (TO-x, where x = 1-12 [1-10 for TOTA-5])</p> <p>framing = framing type:  CAS = channel assigned signaling  CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4  CRC4 = frame alignment sequence framing with cyclic redundancy check 4  D4 = D4 framing format  ESF = ESF framing format  FAS = frame alignment sequence framing</p> <p>troublecode = output signals when card fails:  ALW = AIS is sent on all outputs  INH = all outputs are squelched</p> <p><b>Caution: If any port on the card is set for ANALOG, the troublecode must be set to INH.</b></p> <p>portseverity = alarm type caused by port failure:  MJ = major  MN = minor</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

**Table G. GTI Card Alarm Integration Times**

INTEGRATION PARAMETER SETTING	GTI CARD TYPE	ALARM INTEGRATION TIME (SIGNAL DEFECT ONLY)	
		MINOR ALARM	MAJOR ALARM
1	GTI -13, & -14	4 hours	24 hours
	GTI -15	Rubidium ref: 4 hours	Rubidium ref: 24 hours
		Quartz ref: 3/4 hour	Quartz ref: 6 hours
2	GTI -13, & -14	3 hours	18 hours
	GTI -15	Rubidium ref: 8 hours	Rubidium ref: 48 hours
		Quartz ref: no minor alarm	Quartz ref: 6 hours
3	GTI -13, & -14	1 hour	6 hours
	GTI -15	Rubidium ref: no minor alarm	Rubidium ref: 24 hours
		Quartz ref: no minor alarm	Quartz ref: 1 hour
4	GTI -13, & -14	10 minutes	1 hour
	GTI -15	Rubidium ref: 1/2 hour	Rubidium ref: 1 hour
		Quartz ref: 1/2 hour	Quartz ref: 1 hour

Notes:

1. The GTI types are as follows:

<u>type</u>	<u>part #</u>
GTI -13	090-42140-13
GTI -14	090-42140-14 & 090-44140-14
GTI -15	090-42140-15

2. The times listed are from when a SIGNAL DEFECT occurs until a minor or major alarm is declared.

Chart 14. Reference Input Ports

TASK	PROCEDURE
<p>This chart provides the steps for controlling reference input ports including: entering ports into the system database, putting ports into service, displaying port parameters, changing port parameters, taking ports out of service, and deleting ports from the system database.</p>	
<p>Enter Port</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre>ENT-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: [&lt;framing&gt;],           [&lt;priority&gt;], [&lt;reference type&gt;], [&lt;signal type&gt;];</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):  a = MRC card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>framing = type of framing:  CAS = channel assigned signaling  CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4  CRC4 = frame alignment sequence framing with cyclic redundancy check 4  D4 = D4 framing format  ESF = ESF framing format  FAS = frame alignment sequence framing</p> <p>priority = priority of the reference on this port (1-4 with 1 the highest)</p> <p>reference type = type of reference:  CESIUM = cesium  GPS = global positioning system  LORAN = LORAN  NETWORK = network</p> <p>signal type = type of signal:  ANALOG = analog  DIGITAL = digital</p> <p>Notes:  1. If a parameter is left blank, the switch settings for that parameter will be used.  2. If all the reference ports of an MRC card are configured for the same priority, the references will be selected based on the numerical order of the ports. The same numerical order will be listed if the settings are retrieved.</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE
Restore Port	<p>Access level 3 is required to use this command. Enter:</p> <pre>RST-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):  a = MRC card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Display Performance Monitoring Data	<p>Access level 2 is required to use this command. Enter:</p> <pre>RTRV-PM-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: &lt;monitor type&gt;, , , , ;</pre> <p>aid = MRC card port (MRC-a-b):  a = MRC card slot (1-2)  b = port (1-4 or ALL)</p> <p>monitor type = the monitored parameter:  ALL = all monitor types  BPV = bipolar violations  CRC = cyclic redundancy check</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:&lt;monitor type&gt;,&lt;monitor value&gt;, , , , &lt;monitor date&gt;,&lt;monitor time&gt;" ...</pre> <p>monitor value = value retrieved for the monitor type  monitor date = current date  monitor time = current time</p>



Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE
<p>Clear Performance Monitoring Data</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>INIT-REG: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;monitor type&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):</p> <ul style="list-style-type: none"> <li>a = MRC card slot (1-2)</li> <li>b = port (1-4 or ALL)</li> <li>c = ending port in a range (2-4 with c &gt; b)</li> </ul> <p>monitor type = the monitored parameter:</p> <ul style="list-style-type: none"> <li>ALL = all monitor registers</li> <li>BPV = bipolar violations register</li> <li>CRC = cyclic redundancy check register</li> </ul> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE
Display Framing, Priority, Reference Type, & Signal Type	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):                      a = MRC card slot (1-2)                      b = port (1-4 or ALL)                      c = ending port in a range (2-4 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:&lt;ctag&gt;::&lt;framing&gt;,&lt;priority&gt;,   &lt;reference type&gt;,&lt;signal type&gt;," ...</pre> <p>framing = type of framing:                      AUTO = (see note below)                      CAS = channel assigned signaling                      CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4                      CRC4 = frame alignment sequence framing with cyclic redundancy check 4                      D4 = D4 framing format                      ESF = ESF framing format                      FAS = frame alignment sequence framing</p> <p>priority = priority of the reference on this port (1-4 with 1 the highest)</p> <p>reference type = type of reference:                      CESIUM = cesium                      GPS = global positioning system                      LORAN = LORAN                      NETWORK = network</p> <p>signal type = type of signal:                      ANALOG = analog                      DIGITAL = digital</p> <p><b>Note:</b> If the framing type has never been set for a port on an MRC card, the retrieved framing type for that port will indicate AUTO. If this occurs, use the ENT-PORT command (if the port has not been entered) or the ED-PORT command (if the port has been entered) to set the framing type for the specified port.</p>

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE
<p>Change Framing, Priority, Reference Type, &amp; Signal Type</p>	<p>Access level 3 is required to use this command. Enter:</p> <p>ED-</p> <pre>PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: [&lt;framing&gt;], [&lt;priority&gt;],       [&lt;reference type&gt;], [&lt;signal type&gt;];</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):  a = MRC card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>framing = type of framing:  CAS = channel assigned signaling  CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4  CRC4 = frame alignment sequence framing with cyclic redundancy check 4  D4 = D4 framing format  ESF = ESF framing format  FAS = frame alignment sequence framing</p> <p>priority = priority of the reference on this port (1-4 with 1 the highest)</p> <p>reference type = type of reference:  CESIUM = cesium  GPS = global positioning system  LORAN = LORAN  NETWORK = network</p> <p>signal type = type of signal:  ANALOG = analog  DIGITAL = digital</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE																																		
<p>Display Threshold</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-TH-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;monitor type&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):  a = MRC card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>monitor type = the monitored parameter:  ALL = all monitored parameters  BPV = bipolar violations  CRC = cyclic redundancy check</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:&lt;monitor type&gt;,,,&lt;threshold&gt;" ...</pre> <p>threshold = threshold level in decimal numerals</p> <p><b>Note for BPV and CRC:</b> Only in-service (restored) ports are sampled; therefore, the BPV or CRC counts displayed correspond to a particular error rate depending on the number of in-service ports. Find the BPV count in one of the tables below that is closest to the displayed BPV or CRC count and in the column which represents the number of ports in service, then follow across to the corresponding error rate. Because the ports are sampled in turn, there is some amount of settling time for the framing circuit. This settling time causes an error of <math>\pm 4\%</math> in the specified error rate. The observation interval is 15 minutes. If an MRC or PSM card has only one port active, no sampling occurs.</p> <table border="1" data-bbox="352 1402 1321 1809"> <thead> <tr> <th rowspan="2">Error Rate</th> <th colspan="4">BPV or CRC counts for a T1 signal</th> </tr> <tr> <th>1 port in service</th> <th>2 ports in service</th> <th>3 ports in service</th> <th>4 ports in service</th> </tr> </thead> <tbody> <tr> <td><math>1 \times 10^{-8}</math></td> <td>14</td> <td>7</td> <td>5</td> <td>4</td> </tr> <tr> <td><math>1 \times 10^{-7}</math></td> <td>139</td> <td>70</td> <td>46</td> <td>35</td> </tr> <tr> <td><math>1 \times 10^{-6}</math></td> <td>1390</td> <td>695</td> <td>464</td> <td>348</td> </tr> <tr> <td><math>1 \times 10^{-5}</math></td> <td>13896</td> <td>6948</td> <td>4632</td> <td>3474</td> </tr> <tr> <td><math>2.35 \times 10^{-5}</math></td> <td>32767</td> <td>16384</td> <td>10922</td> <td>8192</td> </tr> </tbody> </table>	Error Rate	BPV or CRC counts for a T1 signal				1 port in service	2 ports in service	3 ports in service	4 ports in service	$1 \times 10^{-8}$	14	7	5	4	$1 \times 10^{-7}$	139	70	46	35	$1 \times 10^{-6}$	1390	695	464	348	$1 \times 10^{-5}$	13896	6948	4632	3474	$2.35 \times 10^{-5}$	32767	16384	10922	8192
Error Rate	BPV or CRC counts for a T1 signal																																		
	1 port in service	2 ports in service	3 ports in service	4 ports in service																															
$1 \times 10^{-8}$	14	7	5	4																															
$1 \times 10^{-7}$	139	70	46	35																															
$1 \times 10^{-6}$	1390	695	464	348																															
$1 \times 10^{-5}$	13896	6948	4632	3474																															
$2.35 \times 10^{-5}$	32767	16384	10922	8192																															

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE				
Display Threshold (Contd)	BPV or CRC counts for an E1 signal				
	Error Rate	1 port in service	2 ports in service	3 ports in service	4 ports in service
	$1 \times 10^{-8}$	18	9	6	4
	$1 \times 10^{-7}$	184	92	61	46
	$1 \times 10^{-6}$	1843	922	614	461
	$1 \times 10^{-5}$	18432	9216	6144	4608
	$2.35 \times 10^{-5}$	32767	16384	10922	8192

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE																																		
<p>Change Threshold</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>SET-TH-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::                 &lt;monitor type&gt;,&lt;threshold&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):  a = MRC card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>monitor type = the monitored parameter:  BPV = bipolar violations  CRC = cyclic redundancy check</p> <p>threshold = 0-32767</p> <p><b>Note:</b> Only in-service (restored) ports are sampled; therefore, the BPV or CRC counts entered to obtain a desired error rate depends on the number of in-service ports. Enter a BPV or CRC count from the table below based on the desired error rate and the number of ports in service as the &lt;thlev&gt; parameter in the command.</p> <table border="1" data-bbox="379 1003 1347 1406"> <thead> <tr> <th rowspan="2">Error Rate</th> <th colspan="4">BPV or CRC counts for a T1 signal</th> </tr> <tr> <th>1 port in service</th> <th>2 ports in service</th> <th>3 ports in service</th> <th>4 ports in service</th> </tr> </thead> <tbody> <tr> <td>1 x 10<sup>-8</sup></td> <td>14</td> <td>7</td> <td>5</td> <td>4</td> </tr> <tr> <td>1 x 10<sup>-7</sup></td> <td>139</td> <td>70</td> <td>46</td> <td>35</td> </tr> <tr> <td>1 x 10<sup>-6</sup></td> <td>1390</td> <td>695</td> <td>464</td> <td>348</td> </tr> <tr> <td>1 x 10<sup>-5</sup></td> <td>13896</td> <td>6948</td> <td>4632</td> <td>3474</td> </tr> <tr> <td>2.35 x 10<sup>-5</sup></td> <td>32767</td> <td>16384</td> <td>10922</td> <td>8192</td> </tr> </tbody> </table>	Error Rate	BPV or CRC counts for a T1 signal				1 port in service	2 ports in service	3 ports in service	4 ports in service	1 x 10 <sup>-8</sup>	14	7	5	4	1 x 10 <sup>-7</sup>	139	70	46	35	1 x 10 <sup>-6</sup>	1390	695	464	348	1 x 10 <sup>-5</sup>	13896	6948	4632	3474	2.35 x 10 <sup>-5</sup>	32767	16384	10922	8192
Error Rate	BPV or CRC counts for a T1 signal																																		
	1 port in service	2 ports in service	3 ports in service	4 ports in service																															
1 x 10 <sup>-8</sup>	14	7	5	4																															
1 x 10 <sup>-7</sup>	139	70	46	35																															
1 x 10 <sup>-6</sup>	1390	695	464	348																															
1 x 10 <sup>-5</sup>	13896	6948	4632	3474																															
2.35 x 10 <sup>-5</sup>	32767	16384	10922	8192																															

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE				
Change Threshold (Contd)	BPV or CRC counts for an E1 signal				
	Error Rate	1 port in service	2 ports in service	3 ports in service	4 ports in service
	$1 \times 10^{-8}$	18	9	6	4
	$1 \times 10^{-7}$	184	92	61	46
	$1 \times 10^{-6}$	1843	922	614	461
	$1 \times 10^{-5}$	18432	9216	6144	4608
	$2.35 \times 10^{-5}$	32767	16384	10922	8192
Because the ports are sampled in turn, there is some amount of settling time for the framing circuit. This settling time causes an error of $\pm 4\%$ in the specified error rate. The observation interval is 15 minutes. If an MRC or PSM card has only one port active, no sampling occurs.					
Response:					
<pre>                     &lt;sid&gt; &lt;date&gt; &lt;time&gt;                     M &lt;ctag&gt; COMPLD                 </pre>					

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE
Display Alarm Severity	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-ATTR-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):</p> <ul style="list-style-type: none"> <li>a = MRC card slot (1-2)</li> <li>b = port (1-4 or ALL)</li> <li>c = ending port in a range (2-4 with c &gt; b)</li> </ul> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:&lt;severity&gt;,&lt;condition&gt;" ...</pre> <p>severity = severity set for the condition:</p> <ul style="list-style-type: none"> <li>CR = critical alarm</li> <li>MJ = major alarm</li> <li>MN = minor alarm</li> <li>NA = not alarmed</li> <li>NR = not reported</li> <li>CL = cleared</li> </ul> <p>condition = port condition:</p> <ul style="list-style-type: none"> <li>AIS = alarm indication signal</li> <li>ALL = all monitor types</li> <li>BPV = bipolar violations</li> <li>CRC = cyclic redundancy check</li> <li>FFREQ = fractional frequency</li> <li>LOS = loss of signal</li> <li>OOF = out-of-fame errors</li> </ul>



Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE
<p>Change Alarm Severity</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre>SET-ATTR-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::                                 &lt;severity&gt;, &lt;condition&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):  a = MRC card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>severity = severity set for the condition:  CR = critical alarm  MJ = major alarm  MN = minor alarm  NA = not alarmed  NR = not reported</p> <p>condition = port condition:  AIS = alarm indication signal  ALL = all monitor types  BPV = bipolar violations  CRC = cyclic redundancy check  FFREQ = fractional frequency  LOS = loss of signal  OOF = out-of-frame errors</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Display Message Type for Autonomous Port Alarms</p>	<p>Access level 4 is required to use this command. This command is not supported in software release 5.02.01. Enter:</p> <pre>RTRV-REPTMODE-PORT: [&lt;tid&gt;] ::&lt;ctag&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "REPTMODE: &lt;modetype&gt;"</pre> <p>modetype = type of message used for autonomous port alarms:  ALW = REPT-ALM-PORT message  INH = REPT-ALM-EQPT message</p>

Chart 14. Reference Input Ports (Contd)

TASK	PROCEDURE
<p>Set Message Type for Autonomous Port Alarms</p>	<p>Access level 4 is required to use this command. This command is not supported in software release 5.02.01. Enter:</p> <pre>SET-REPTMODE-PORT: [&lt;tid&gt;] ::&lt;ctag&gt;::&lt;modetype&gt;;</pre> <p>modetype = type of message used for autonomous port alarms:  ALW = REPT-ALM-PORT message  INH = REPT-ALM-EQPT message</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Remove Port</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>RMV-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):  a = MRC card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Delete Port</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = MRC card port (MRC-a-b[&amp;&amp;-c]):  a = MRC card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 15. Monitor Input Ports

TASK	PROCEDURE
<p>This chart provides the steps for controlling monitor input ports including: entering ports into the system database, putting ports into service, displaying port parameters, changing port parameters, taking ports out of service, and deleting ports from the system database.</p>	
<p>Enter Port</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre> ENT-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;framing&gt;,,,&lt;signal type&gt;; </pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>framing = type of framing:  CAS = channel assigned signaling  CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4  CRC4 = frame alignment sequence framing with cyclic redundancy check 4  D4 = D4 framing format  ESF = ESF framing format  FAS = frame alignment sequence framing</p> <p>signal type = type of signal:  ANALOG = analog signal  DIGITAL = digital signal</p> <p>Response:</p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD </pre>
<p>Restore Port</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre> RST-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;; </pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>Response:</p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD </pre>

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
Display Performance Monitoring Data	<p>Access level 2 is required to use this command. Enter:</p> <pre>RTRV-PM-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;montype&gt;,,,,, &lt;mondatt&gt;, [&lt;montm1&gt; &lt;montm2&gt;];</pre> <p>aid = PSM card port (PSM-a-b):                      a = PSM card slot (1-11)                      b = port (1-4)</p> <p>montype = the monitored parameter:                      SLIPS = number of slips since the previous midnight (used with monitor date and monitor time = null)                      BPV = 15-minute bipolar violation counts (used with monitor time 2)                      CRC = 15-minute cyclic redundancy check error counts (used with monitor time 2)                      MTIE = 900-second MTIE accumulated between monitor time 2 and 1 hour after monitor time 2 (in nanoseconds)                      TDEV = 128-second TDEV accumulated between monitor time 2 and 1 hour after monitor time 2 (in nanoseconds)                      PHASE1M = 1-minute average phase accumulated between monitor time 2 and 1 hour after monitor time 2 (in nanoseconds)</p> <p>mondatt = date:                      mm-dd = mm = month, dd = day                      (null) = current day</p> <p>montm1 = current time (null)                      montm2 = start time of a 15-minute period:                      hh-00 = hour of the day (hh = 00-23)                      hh-15 = 15 minutes past hour hh                      hh-30 = 30 minutes past hour hh                      hh-45 = 45 minutes past hour hh</p> <p>Notes:                      1. BPVs and CRCs are reported in 15-minute bins and can be retrieved for the past 24 hours. Each 15-minute bin is reinitialized to zero counts at the start of each 15-minute bin.                      2. The time specified in montm2 is the start of a 15-minute period.                      3. If the start time to the present time is less than 1 hour, only full 15-minute periods will be displayed.</p>

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
Display Performance Monitoring Data (Contd)	<p>Response:</p> <p><u>For SLIPS and PHASE1M:</u></p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   "&lt;aid&gt;:&lt;montype&gt;,&lt;monval&gt;,,,,,&lt;mondatt&gt;,&lt;montm&gt;"...</pre> <p>                     monval = value retrieved for the monitor type                      mondatt = current date                      montm = current time                 </p> <p><u>For BPV and CRC:</u></p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   "&lt;aid&gt;:&lt;montype&gt;,&lt;monval&gt;,&lt;vldty&gt;,,,,,&lt;mondatt&gt;,&lt;montm&gt;"...</pre> <p>                     vldty = indicates whether the information collected represents a complete monitoring interval:                      (null) = complete                      NA = not available                      P = partial                 </p> <p><u>For MTIE and TDEV:</u></p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   "&lt;aid&gt;:&lt;montype&gt;,&lt;monval-1&gt;,&lt;vldty-1&gt;,&lt;monval-2&gt;,&lt;vldty-2&gt;,&lt;monval-3&gt;,&lt;vldty-3&gt;,&lt;monval-4&gt;,&lt;vldty-4&gt;,,,,,&lt;mondatt&gt;,&lt;montm&gt;"...</pre> <p><b>Note:</b> Each line displays one hour of data. The four monvals and corresponding four vldtys are for the four 15-minute periods following the montm shown at the end of each line. The -1, -2, -3, and -4 indicate the first, second, third, and fourth 15-minute period after the montm shown at the end of the line.</p>

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
<p>Clear Performance Monitoring Data</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>INIT-REG: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;montype&gt;;</pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>montype = the monitored parameter:  ALL = all register types  BPV = bipolar violations register  CRC = cyclic redundancy check register  MTIE = MTIE register  PHASE1M = phase 1-minute register  SLIPS = slips register  TDEV = TDEV register</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
<p>Display Framing &amp; Signal Type</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:&lt;ctag&gt;::&lt;framing&gt;,,,&lt;signal type&gt;" ...</pre> <p>framing = type of framing:  AUTO = (see note below)  CAS = channel assigned signaling  CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4  CRC4 = frame alignment sequence framing with cyclic redundancy check 4  D4 = D4 framing format  ESF = ESF framing format  FAS = frame alignment sequence framing</p> <p>signal type = type of signal:  ANALOG = analog signal  DIGITAL = digital signal</p> <p><b>Note:</b> If the framing type has never been set for a port on a PSM card, the retrieved framing type for that port will indicate AUTO. If this occurs, use the ENT-PORT command (if the port has not been entered) or the ED-PORT command (if the port has been entered) to set the framing type for the specified port.</p>

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
<p>Change Framing &amp; Signal Type</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>ED-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;:: [&lt;framing&gt;]                                      , , , [&lt;signal type&gt;];</pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>framing = type of framing:  AUTO = (see note below)  CAS = channel assigned signaling  CAS4 = channel assigned signaling with frame aligned sequence with cyclic redundancy check 4  CRC4 = frame alignment sequence framing with cyclic redundancy check 4  D4 = D4 framing format  ESF = ESF framing format  FAS = frame alignment sequence framing</p> <p>signal type = type of signal:  ANALOG = analog signal  DIGITAL = digital signal</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>



Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
<p>Display Threshold</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-TH-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::                                      &lt;monitor type&gt;;</pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>monitor type = the monitored parameter:  ALL = all monitor types  BPV = bipolar violations  CRC = cyclic redundancy check  MTIE<sub>x</sub> = MTIE x-second threshold (x = 1, 4, 16, 64, 128, 512, 900)  TDEV<sub>x</sub> = TDEV x-second threshold (x = 1, 4, 16, 64, 128)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   "&lt;aid&gt;:&lt;monitor type&gt;,,,&lt;threshold&gt;" ...</pre> <p>threshold = threshold level in decimal numerals</p>

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE																																																																				
Display Threshold (Contd)	<p data-bbox="295 376 1433 633"><b>Note for BPV and CRC:</b> Only in-service (restored) ports are sampled; therefore, the BPV or CRC counts displayed correspond to a particular error rate depending on the number of in-service ports. Find the BPV count in one of the tables below that is closest to the displayed BPV or CRC count and in the column which represents the number of ports in service, then follow across to the corresponding error rate. Because the ports are sampled in turn, there is some amount of settling time for the framing circuit. This settling time causes an error of <math>\pm 4\%</math> in the specified error rate. The observation interval is 15 minutes. If an MRC or PSM card has only one port active, no sampling occurs.</p> <table border="1" data-bbox="379 712 1347 1122"> <thead> <tr> <th rowspan="2">Error Rate</th> <th colspan="4">BPV or CRC counts for a T1 signal</th> </tr> <tr> <th>1 port in service</th> <th>2 ports in service</th> <th>3 ports in service</th> <th>4 ports in service</th> </tr> </thead> <tbody> <tr> <td><math>1 \times 10^{-8}</math></td> <td>14</td> <td>7</td> <td>5</td> <td>4</td> </tr> <tr> <td><math>1 \times 10^{-7}</math></td> <td>139</td> <td>70</td> <td>46</td> <td>35</td> </tr> <tr> <td><math>1 \times 10^{-6}</math></td> <td>1390</td> <td>695</td> <td>464</td> <td>348</td> </tr> <tr> <td><math>1 \times 10^{-5}</math></td> <td>13896</td> <td>6948</td> <td>4632</td> <td>3474</td> </tr> <tr> <td><math>2.35 \times 10^{-5}</math></td> <td>32767</td> <td>16384</td> <td>10922</td> <td>8192</td> </tr> </tbody> </table> <table border="1" data-bbox="379 1178 1347 1588"> <thead> <tr> <th rowspan="2">Error Rate</th> <th colspan="4">BPV or CRC counts for an E1 signal</th> </tr> <tr> <th>1 port in service</th> <th>2 ports in service</th> <th>3 ports in service</th> <th>4 ports in service</th> </tr> </thead> <tbody> <tr> <td><math>1 \times 10^{-8}</math></td> <td>18</td> <td>9</td> <td>6</td> <td>4</td> </tr> <tr> <td><math>1 \times 10^{-7}</math></td> <td>184</td> <td>92</td> <td>61</td> <td>46</td> </tr> <tr> <td><math>1 \times 10^{-6}</math></td> <td>1843</td> <td>922</td> <td>614</td> <td>461</td> </tr> <tr> <td><math>1 \times 10^{-5}</math></td> <td>18432</td> <td>9216</td> <td>6144</td> <td>4608</td> </tr> <tr> <td><math>2.35 \times 10^{-5}</math></td> <td>32767</td> <td>16384</td> <td>10922</td> <td>8192</td> </tr> </tbody> </table>	Error Rate	BPV or CRC counts for a T1 signal				1 port in service	2 ports in service	3 ports in service	4 ports in service	$1 \times 10^{-8}$	14	7	5	4	$1 \times 10^{-7}$	139	70	46	35	$1 \times 10^{-6}$	1390	695	464	348	$1 \times 10^{-5}$	13896	6948	4632	3474	$2.35 \times 10^{-5}$	32767	16384	10922	8192	Error Rate	BPV or CRC counts for an E1 signal				1 port in service	2 ports in service	3 ports in service	4 ports in service	$1 \times 10^{-8}$	18	9	6	4	$1 \times 10^{-7}$	184	92	61	46	$1 \times 10^{-6}$	1843	922	614	461	$1 \times 10^{-5}$	18432	9216	6144	4608	$2.35 \times 10^{-5}$	32767	16384	10922	8192
Error Rate	BPV or CRC counts for a T1 signal																																																																				
	1 port in service	2 ports in service	3 ports in service	4 ports in service																																																																	
$1 \times 10^{-8}$	14	7	5	4																																																																	
$1 \times 10^{-7}$	139	70	46	35																																																																	
$1 \times 10^{-6}$	1390	695	464	348																																																																	
$1 \times 10^{-5}$	13896	6948	4632	3474																																																																	
$2.35 \times 10^{-5}$	32767	16384	10922	8192																																																																	
Error Rate	BPV or CRC counts for an E1 signal																																																																				
	1 port in service	2 ports in service	3 ports in service	4 ports in service																																																																	
$1 \times 10^{-8}$	18	9	6	4																																																																	
$1 \times 10^{-7}$	184	92	61	46																																																																	
$1 \times 10^{-6}$	1843	922	614	461																																																																	
$1 \times 10^{-5}$	18432	9216	6144	4608																																																																	
$2.35 \times 10^{-5}$	32767	16384	10922	8192																																																																	

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE																																																																				
<p>Change Threshold</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>SET-TH-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;monitor type&gt;,&lt;threshold&gt;;</pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>monitor type = the monitored parameter:  BPV = bipolar violations  CRC = cyclic redundancy check  MTIE<sub>x</sub> = MTIE x-second threshold (x = 1, 4, 16, 64, 128, 512, 900)  TDEV<sub>x</sub> = TDEV x-second threshold (x = 1, 4, 16, 64, 128)</p> <p>threshold = 0-32767</p> <p><b>Note:</b> Only in-service (restored) ports are sampled; therefore, the BPV or CRC counts entered to obtain a desired error rate depends on the number of in-service ports. Enter a BPV or CRC count from one of the tables below based on the desired error rate and the number of ports in service as the &lt;thlev&gt; parameter in the command.</p> <table border="1" data-bbox="443 1122 1410 1529"> <thead> <tr> <th rowspan="2">Error Rate</th> <th colspan="4">BPV or CRC counts for a T1 signal</th> </tr> <tr> <th>1 port in service</th> <th>2 ports in service</th> <th>3 ports in service</th> <th>4 ports in service</th> </tr> </thead> <tbody> <tr> <td>1 x 10<sup>-8</sup></td> <td>14</td> <td>7</td> <td>5</td> <td>4</td> </tr> <tr> <td>1 x 10<sup>-7</sup></td> <td>139</td> <td>70</td> <td>46</td> <td>35</td> </tr> <tr> <td>1 x 10<sup>-6</sup></td> <td>1390</td> <td>695</td> <td>464</td> <td>348</td> </tr> <tr> <td>1 x 10<sup>-5</sup></td> <td>13896</td> <td>6948</td> <td>4632</td> <td>3474</td> </tr> <tr> <td>2.35 x 10<sup>-5</sup></td> <td>32767</td> <td>16384</td> <td>10922</td> <td>8192</td> </tr> </tbody> </table> <table border="1" data-bbox="443 1559 1410 1962"> <thead> <tr> <th rowspan="2">Error Rate</th> <th colspan="4">BPV or CRC counts for an E1 signal</th> </tr> <tr> <th>1 port in service</th> <th>2 ports in service</th> <th>3 ports in service</th> <th>4 ports in service</th> </tr> </thead> <tbody> <tr> <td>1 x 10<sup>-8</sup></td> <td>18</td> <td>9</td> <td>6</td> <td>4</td> </tr> <tr> <td>1 x 10<sup>-7</sup></td> <td>184</td> <td>92</td> <td>61</td> <td>46</td> </tr> <tr> <td>1 x 10<sup>-6</sup></td> <td>1843</td> <td>922</td> <td>614</td> <td>461</td> </tr> <tr> <td>1 x 10<sup>-5</sup></td> <td>18432</td> <td>9216</td> <td>6144</td> <td>4608</td> </tr> <tr> <td>2.35 x 10<sup>-5</sup></td> <td>32767</td> <td>16384</td> <td>10922</td> <td>8192</td> </tr> </tbody> </table>	Error Rate	BPV or CRC counts for a T1 signal				1 port in service	2 ports in service	3 ports in service	4 ports in service	1 x 10 <sup>-8</sup>	14	7	5	4	1 x 10 <sup>-7</sup>	139	70	46	35	1 x 10 <sup>-6</sup>	1390	695	464	348	1 x 10 <sup>-5</sup>	13896	6948	4632	3474	2.35 x 10 <sup>-5</sup>	32767	16384	10922	8192	Error Rate	BPV or CRC counts for an E1 signal				1 port in service	2 ports in service	3 ports in service	4 ports in service	1 x 10 <sup>-8</sup>	18	9	6	4	1 x 10 <sup>-7</sup>	184	92	61	46	1 x 10 <sup>-6</sup>	1843	922	614	461	1 x 10 <sup>-5</sup>	18432	9216	6144	4608	2.35 x 10 <sup>-5</sup>	32767	16384	10922	8192
Error Rate	BPV or CRC counts for a T1 signal																																																																				
	1 port in service	2 ports in service	3 ports in service	4 ports in service																																																																	
1 x 10 <sup>-8</sup>	14	7	5	4																																																																	
1 x 10 <sup>-7</sup>	139	70	46	35																																																																	
1 x 10 <sup>-6</sup>	1390	695	464	348																																																																	
1 x 10 <sup>-5</sup>	13896	6948	4632	3474																																																																	
2.35 x 10 <sup>-5</sup>	32767	16384	10922	8192																																																																	
Error Rate	BPV or CRC counts for an E1 signal																																																																				
	1 port in service	2 ports in service	3 ports in service	4 ports in service																																																																	
1 x 10 <sup>-8</sup>	18	9	6	4																																																																	
1 x 10 <sup>-7</sup>	184	92	61	46																																																																	
1 x 10 <sup>-6</sup>	1843	922	614	461																																																																	
1 x 10 <sup>-5</sup>	18432	9216	6144	4608																																																																	
2.35 x 10 <sup>-5</sup>	32767	16384	10922	8192																																																																	

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
<p>Change Threshold (Contd)</p>	<p>Because the ports are sampled in turn, there is some amount of settling time for the framing circuit. This settling time causes an error of <math>\pm 4\%</math> in the specified error rate. The observation interval is 15 minutes. If an MRC or PSM card has only one port active, no sampling occurs.</p> <p>Response:</p> <pre>                 &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD                     </pre>
<p>Display Alarm Severity</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre> RTRV-ATTR-PORT::&lt;aid&gt;:&lt;ctag&gt;;                     </pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):</p> <ul style="list-style-type: none"> <li>a = PSM card slot (1-11)</li> <li>b = port (1-4 or ALL)</li> <li>c = ending port in a range (2-4 with c &gt; b)</li> </ul> <p>Response:</p> <pre>                 &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   "&lt;aid&gt;:&lt;severity&gt;,&lt;condition&gt;" ...                     </pre> <p>severity = severity set for the condition:</p> <ul style="list-style-type: none"> <li>CR = critical alarm</li> <li>MJ = major alarm</li> <li>MN = minor alarm</li> <li>NA = not alarmed</li> <li>NR = not reported</li> </ul> <p>condition = port condition (refer to Table H)</p> <ul style="list-style-type: none"> <li>ALL = all monitor types</li> <li>BPV = bipolar violations</li> <li>CRC = cyclic redundancy check</li> <li>MTIE<sub>x</sub> = MTIE x-second threshold (x = 1, 4, 16, 64, 128, 512, 900)</li> <li>TDEV<sub>x</sub> = TDEV x-second threshold (x = 1, 4, 16, 64, 128)</li> </ul>

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
<p>Change Alarm Severity</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre>SET-ATTR-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::&lt;severity&gt;, &lt;condition&gt;;</pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>severity = severity set for the condition:  CR = critical alarm  MJ = major alarm  MN = minor alarm  NA = not alarmed  NR = not reported</p> <p>condition = port condition:  AIS = alarm indication signal  ALL = all monitor types  BPV = bipolar violations  CRC = cyclic redundancy check  LOS = loss of signal  MTIE<sub>x</sub> = MTIE x-second threshold (x = 1, 4, 16, 64, 128, 512, 900)  TDEV<sub>x</sub> = TDEV x-second threshold (x = 1, 4, 16, 64, 128)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Display Message Type for Autonomous Port Alarms</p>	<p>Access level 4 is required to use this command. This command is not supported in software release 5.02.01. Enter:</p> <pre>RTRV-REPTMODE-PORT: [&lt;tid&gt;] ::&lt;ctag&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "REPTMODE: &lt;modetype&gt;"</pre> <p>modetype = type of message used for autonomous port alarms:  ALW = REPT-ALM-PORT message  INH = REPT-ALM-EQPT message</p>

Chart 15. Monitor Input Ports (Contd)

TASK	PROCEDURE
Set Message Type for Autonomous Port Alarms	<p>Access level 4 is required to use this command. This command is not supported in software release 5.02.01. Enter:</p> <pre>SET-REPTMODE-PORT: [&lt;tid&gt;] ::&lt;ctag&gt;::&lt;modetype&gt;;</pre> <p>modetype = type of message used for autonomous port alarms:  ALW = REPT-ALM-PORT message  INH = REPT-ALM-EQPT message</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Remove Port	<p>Access level 3 is required to use this command. Enter:</p> <pre>RMV-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-11)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
Delete Port	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = PSM card port (PSM-a-b[&amp;&amp;-c]):  a = PSM card slot (1-2)  b = port (1-4 or ALL)  c = ending port in a range (2-4 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 16. Timing Output Ports

TASK	PROCEDURE
<p>This chart provides the steps for controlling timing output ports including: entering ports into the system database, putting ports into service, displaying port parameters, changing port parameters, taking ports out of service, and deleting ports from the system database.</p>	
<p>Enter Port</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre> ENT-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::,,,&lt;signal type&gt;; </pre> <p>aid = TO card port (TO-a-b[&amp;&amp;-c]):</p> <ul style="list-style-type: none"> <li>a = TO card slot (1-12) (1-10 for TOTA-5)</li> <li>b = port (1-10 or ALL)</li> <li>c = ending port in a range (2-10 with c &gt; b)</li> </ul> <p>signal type = type of signal:</p> <ul style="list-style-type: none"> <li>ANALOG = analog (TO-EA5 only)</li> <li>DIGITAL = digital</li> </ul> <p>Response:</p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD </pre>
<p>Restore Port</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre> RST-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;; </pre> <p>aid = TO card port (TO-a-b[&amp;&amp;-c]):</p> <ul style="list-style-type: none"> <li>a = TO card slot (1-12) (1-10 for TOTA-5)</li> <li>b = port (1-10 or ALL)</li> <li>c = ending port in a range (2-10 with c &gt; b)</li> </ul> <p>Response:</p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD </pre>

Chart 16. Timing Output Ports (Contd)

TASK	PROCEDURE
<p>Display Signal Type</p>	<p>Access level 1 is required to use this command. Enter:</p> <pre>RTRV-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = TO card port (TO-a-b[&amp;&amp;-c]):  a = TO card slot (1-12) (1-10 for TOTA-5)  b = port (1-10 or ALL)  c = ending port in a range (2-10 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:&lt;ctag&gt;::,,,&lt;signal type&gt;" ...</pre> <p>signal type = type of signal:  ANALOG = analog  DIGITAL = digital</p>
<p>Change Signal Type</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>ED-PORT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::,,,&lt;signal type&gt;;</pre> <p>aid = TO card port (TO-a-b[&amp;&amp;-c]):  a = TO card slot (1-12) (1-10 for TOTA-5)  b = port (1-10 or ALL)  c = ending port in a range (2-10 with c &gt; b)</p> <p>signal type = type of signal:  ANALOG = analog (TO-EA5 only)  DIGITAL = digital</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Display Message Type for Autonomous Port Alarms</p>	<p>Access level 4 is required to use this command. This command is not supported in software release 5.02.01. Enter:</p> <pre>RTRV-REPTMODE-PORT: [&lt;tid&gt;]::&lt;ctag&gt;;</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "REPTMODE: &lt;modetype&gt;"</pre> <p>modetype = type of message used for autonomous port alarms:  ALW = REPT-ALM-PORT message  INH = REPT-ALM-EQPT message</p>



Chart 16. Timing Output Ports (Contd)

TASK	PROCEDURE
<p>Set Message Type for Autonomous Port Alarms</p>	<p>Access level 4 is required to use this command. This command is not supported in software release 5.02.01. Enter:</p> <pre>SET-REPTMODE-PORT: [&lt;tid&gt;] :&lt;ctag&gt;::&lt;modetype&gt;;</pre> <p>modetype = type of message used for autonomous port alarms:  ALW = REPT-ALM-PORT message  INH = REPT-ALM-EQPT message</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Remove Port</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>RMV-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = TO card port (TO-a-b[&amp;&amp;-c]):  a = TO card slot (1-12) (1-10 for TOTA-5)  b = port (1-10 or ALL)  c = ending port in a range (2-10 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Delete Port</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre>DLT-PORT: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = TO card port (TO-a-b[&amp;&amp;-c]):  a = TO card slot (1-12) (1-10 for TOTA-5)  b = port (1-10 or ALL)  c = ending port in a range (2-10 with c &gt; b)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 17. Synchronization Source for Timing Output Cards

TASK	PROCEDURE
<p>This chart provides the steps for displaying and changing the synchronization source mode for the timing output cards, and for selecting and releasing a specific synchronization source for the timing output cards.</p>	
<p>Display Source Mode for Timing Output Cards</p>	<p>Access level 2 is required to use this command. Enter:</p> <pre>RTRV-ATTR-CONT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;       aid                = SHELF</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD   "&lt;aid&gt;:&lt;source mode&gt;" ...</pre> <p>source mode = source mode for timing output cards:                    RVRT = revertive                    NRVRT = nonrevertive</p>
<p>Change Source Mode for Timing Output Cards</p>	<p>Access level 3 is required to use this command. Enter:</p> <pre>SET-ATTR-CONT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;source mode&gt;;       aid                = SHELF       source mode        = source mode for timing output cards:                            RVRT = revertive                            NRVRT = nonrevertive</pre> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 17. Synchronization Source for Timing Output Cards (Contd)

TASK	PROCEDURE
<p>Select Source for Timing Output Cards</p>	<p><b>Caution: This command should be used for maintenance purposes only. Leaving timing output cards in this mode (a forced synchronization source) will result in timing hits if the selected source fails.</b></p> <p>Access level 4 is required to use this command. Enter:</p> <pre>                     OPR-SYNCHNSW: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::&lt;source&gt;;                      aid                = TO-ALL                     source              = internal source for timing output cards:  CLK1                = clock card 1  CLK2                = clock card 2  IN1                 = system input card 1  IN2                 = system input card 2                 </pre> <p>Response:</p> <pre>                     &lt;sid&gt; &lt;date&gt; &lt;time&gt;                     M &lt;ctag&gt; COMPLD                 </pre>
<p>Release Source for Timing Output Cards</p>	<p>Access level 4 is required to use this command. This command cancels the OPR-SYNCHNSW command. Enter:</p> <pre>                     RLS-SYNCHNSW: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;;                      aid                = TO-ALL                 </pre> <p>Response:</p> <pre>                     &lt;sid&gt; &lt;date&gt; &lt;time&gt;                     M &lt;ctag&gt; COMPLD                 </pre>

Chart 18. Output Protection for Standard Timing Output Cards

TASK	PROCEDURE														
	<p>This chart provides the steps for displaying and setting the output protection type for the timing output cards, and for switching to and releasing from a protection timing output card. This chart applies to TO-EA cards only.</p>														
<p>Display Output Protection Type for Timing Output Cards</p>	<p>Access level 2 is required to use this command. Enter:</p> <pre>RTRV-ATTR-CONT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p style="padding-left: 40px;">aid = TO-ALL</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;:&lt;protection type&gt;" ...</pre> <p style="padding-left: 40px;">protection type = type of protection:</p> <table style="margin-left: 80px;"> <tr> <td>1-1</td> <td>= 1-for-1 protection</td> </tr> <tr> <td>1+1</td> <td>= 1-plus-1 protection</td> </tr> <tr> <td>NO</td> <td>= no protection</td> </tr> </table>	1-1	= 1-for-1 protection	1+1	= 1-plus-1 protection	NO	= no protection								
1-1	= 1-for-1 protection														
1+1	= 1-plus-1 protection														
NO	= no protection														
<p>Change Output Protection Type for Timing Output Cards</p>	<p>Access level 3 is required to use this command. (For a more complete definition of the command, refer to the Input/Output Reference Guide section of this manual.) For Enter:</p> <pre>SET-ATTR-CONT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::&lt;protection type&gt;;</pre> <p style="padding-left: 40px;">aid = TO-EA5 card slot (TO-x, where x = 1–12)</p> <p style="padding-left: 40px;">protection type = type of protection:</p> <table style="margin-left: 80px;"> <tr> <td>1-1</td> <td>= 1-for-1 protection</td> </tr> <tr> <td>1+1</td> <td>= 1-plus-1 protection</td> </tr> <tr> <td>NO</td> <td>= no protection</td> </tr> </table> <p><b>Note:</b> When configuring cards for 1-for-1 or 1-plus-1, both the odd and even slots must be configured identically. The SET-ATTR-CONT command must be issued to each card of the pair, otherwise a database mismatch will occur. The 1-for-1 or 1-plus-1 pairing is shelf dependent as follows:</p> <table style="margin-left: 40px;"> <tr> <td>DCD-519 Master:</td> <td>2 and 3, 4 and 5, 11 and 12</td> </tr> <tr> <td>DCD-519 Expansion:</td> <td>1 and 2, 3 and 4, 5 and 6, 7 and 8, 9 and 10, 11 and 12</td> </tr> <tr> <td>DCD-521 Master or Expansion:</td> <td>1 and 2, 3 and 4, 5 and 6, 7 and 8</td> </tr> <tr> <td>DCD-523 Master or Expansion:</td> <td>1 and 2, 3 and 4, 5 and 6, 7 and 8, 9 and 10, 11 and 12</td> </tr> </table> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>	1-1	= 1-for-1 protection	1+1	= 1-plus-1 protection	NO	= no protection	DCD-519 Master:	2 and 3, 4 and 5, 11 and 12	DCD-519 Expansion:	1 and 2, 3 and 4, 5 and 6, 7 and 8, 9 and 10, 11 and 12	DCD-521 Master or Expansion:	1 and 2, 3 and 4, 5 and 6, 7 and 8	DCD-523 Master or Expansion:	1 and 2, 3 and 4, 5 and 6, 7 and 8, 9 and 10, 11 and 12
1-1	= 1-for-1 protection														
1+1	= 1-plus-1 protection														
NO	= no protection														
DCD-519 Master:	2 and 3, 4 and 5, 11 and 12														
DCD-519 Expansion:	1 and 2, 3 and 4, 5 and 6, 7 and 8, 9 and 10, 11 and 12														
DCD-521 Master or Expansion:	1 and 2, 3 and 4, 5 and 6, 7 and 8														
DCD-523 Master or Expansion:	1 and 2, 3 and 4, 5 and 6, 7 and 8, 9 and 10, 11 and 12														

Chart 18. Output Protection for Standard Timing Output Cards (Contd)

TASK	PROCEDURE
<p>Switch to Protection Timing Output Card</p>	<p>Access level 2 is required to use this command. This command is only for TO-EA cards that are set for 1-for-1 protection. This command forces a protection switch between a normally working timing output card and a protection timing output card (or visa versa) for maintenance purposes. This command will be denied if the protection type has not been entered (SET-ATTR-CONT), or if the protection card is out of service. (For a more complete definition of the command, refer to the Input/Output Reference Guide section of this manual.)</p> <p>Enter:</p> <pre>OPR-PROTNSW: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::MAN;</pre> <p style="padding-left: 40px;">aid = working TO-EA5 card (TO-x, where x = 1-12)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
<p>Release Protection Timing Output Card</p>	<p>Access level 2 is required to use this command. This command is only for TO-EA cards that are set for 1-for-1 protection. This command switches from a protection to a working timing output card. The switch to the working timing output card is performed only if the original switch was initiated by the OPR-PROTNSW command. Enter:</p> <pre>RLS-PROTNSW: [&lt;tid&gt;] :&lt;aid&gt;:&lt;ctag&gt;::MAN;</pre> <p style="padding-left: 40px;">aid = working TO-EA5 card (TO-x, where x = 1-12)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>

Chart 19. Copy Database of Standard Cards

TASK	PROCEDURE
<p>This chart provides the steps for copying standard-card databases to and from the MIS card.</p>	
<p>Copy Card Database from MIS Card to Other Cards</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre> CPY-MEM: [&lt;tid&gt;] :&lt;shelf&gt;:&lt;ctag&gt;:: , FROM-MIS , , TO-a:DATA; </pre> <p>shelf = shelf where copying will occur:            (null) = master shelf            E1 = expansion shelf 1            E2 = expansion shelf 2            E3 = expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)</p> <p>a = card:            GTI-b = MRC card (b = 1-2 or ALL)            MRC-b = MRC card (b = 1-2 or ALL)            PSM-c = PSM card (c = 1-11 or ALL)            TO-d = TO card (c = 1-12 or ALL) (1-10 or ALL for TOTA-5 cards)            ALL = all GTI, MRC, PSM, and TO cards</p> <p><b>Notes:</b></p> <ol style="list-style-type: none"> <li>When copying from an MIS card in a master shelf, enter FROM-MIS as shown in the command. When copying from an MIS card in an expansion shelf, add "Ex-" (where x is 1, 2, or 3) in front of MIS in the command. (Example: FROM-E2-MIS would copy from the MIS card in expansion shelf 2; FROM-E3-MIS would copy from the MIS card in expansion shelf 3.)</li> <li>When copying to the GTI card, the master shelf must be addressed.</li> <li>After copying to the GTI card (or ALL), use the RTRV-COND-EQPT command to ensure that the GTI is in service. If the GTI is not in service, repeat the COPY command.</li> </ol> <p>Response:</p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD </pre>

Chart 19. Copy Database of Standard Cards (Contd)

TASK	PROCEDURE
<p>Copy Card Database from Other Cards to MIS Card</p>	<p>Access level 4 is required to use this command. Enter:</p> <pre> CPY-MEM: [&lt;tid&gt;] :&lt;shelf&gt;:&lt;ctag&gt;::, FROM-a, , TO-MIS:DATA; </pre> <p>shelf = shelf where copying will occur:  (null) = master shelf  E1 = expansion shelf 1  E2 = expansion shelf 2  E3 = expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)</p> <p>a = card:  GTI-b = MRC card (b = 1-2 or ALL)  MRC-b = MRC card (b = 1-2 or ALL)  PSM-c = PSM card (c = 1-11 or ALL)  TO-d = TO card (c = 1-12 or ALL) (1-10 or ALL for TOTA-5 cards)  ALL = all MRC, PSM, and TO cards</p> <p><b>Notes:</b></p> <ol style="list-style-type: none"> <li>1. When copying to an MIS card in a master shelf, enter TO-MIS the &lt;todev&gt; parameters as shown in the table below. When copying to/from an MIS card in an expansion shelf, add "Ex-" (where x is 1, 2, or 3) in front of the MIS in the &lt;fromdev&gt; and &lt;todev&gt; parameters. (Example: FROM-E2-MIS would copy from the MIS card in expansion shelf 2; TO-E3-MIS would copy to the MIS card in expansion shelf 3.)</li> <li>2. When copying from the GTI card, the master shelf must be addressed.</li> <li>3. When copying from the GTI card (or ALL) to the MIS card, the COPY command may be denied with an error code of SROF. If this occurs, repeat the COPY command.</li> </ol> <p>Response:</p> <pre> &lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD </pre>

Chart 20. Copy Program from External Source to MIS Card

STEP	PROCEDURE																		
This chart provides the steps for copying an MIS card program from an external source to the MIS card.																			
1	Create a directory on the hard drive of the PC, and copy the files from both disks (092-45118-22 and 092-45218-22) to the newly created directory.																		
2	To determine the setting for echo on the communication port to be used, use the RTRV-COM command (for details, refer to the task Display Communication Parameters in Chart 4, Communication Ports).																		
3	If the echo parameter is set to INH (inhibited), skip to the next step. If the echo parameter is set to ALW (allowed), use the ED-COM command to change echo to INH (for details, refer to the task Change Communication Parameters in Chart 4, Communication Ports).																		
4	Use the RTRV-INVENTORY command to determine which program location (HI BANK or LOW BANK) is active in the MIS card (for details, refer to the task Change Communication Parameters in Chart 5, System Configuration).																		
5	<p>Ensure that a commercial software communication package (such as PROCOMM PLUS®) that supports the KERMIT protocol is running on the PC from which the program file will be downloaded, and that the PC is running in a VT100 terminal mode.</p> <p>PROCOMM PLUS is a registered trademark of Datastorm Technologies, Inc.</p>																		
6	<p>Ensure that the following KERMIT protocol parameters are set:</p> <table border="0" data-bbox="319 1030 798 1276"> <tr><td>Control quote:</td><td>35</td></tr> <tr><td>Pad:</td><td>0</td></tr> <tr><td>End of line:</td><td>13</td></tr> <tr><td>8th bit quote:</td><td>38</td></tr> <tr><td>Block start:</td><td>1</td></tr> <tr><td>Maximum packet size:</td><td>512</td></tr> <tr><td>Number of pad characters:</td><td>0</td></tr> <tr><td>File type:</td><td>Binary</td></tr> <tr><td>Block check type:</td><td>3-byte CRC</td></tr> </table>	Control quote:	35	Pad:	0	End of line:	13	8th bit quote:	38	Block start:	1	Maximum packet size:	512	Number of pad characters:	0	File type:	Binary	Block check type:	3-byte CRC
Control quote:	35																		
Pad:	0																		
End of line:	13																		
8th bit quote:	38																		
Block start:	1																		
Maximum packet size:	512																		
Number of pad characters:	0																		
File type:	Binary																		
Block check type:	3-byte CRC																		
7	<p>Access level 4 is required to use this command. Enter:</p> <pre data-bbox="303 1366 1340 1400">CPY-MEM: [&lt;tid&gt;]:&lt;shelf&gt;:&lt;ctag&gt;::, FROM-EXT, , TO-MIS:PGM;</pre> <p style="margin-left: 40px;">shelf = shelf where MIS card resides:</p> <table border="0" data-bbox="638 1456 1420 1646" style="margin-left: 40px;"> <tr><td>(null)</td><td>= master shelf</td></tr> <tr><td>E1</td><td>= expansion shelf 1</td></tr> <tr><td>E2</td><td>= expansion shelf 2</td></tr> <tr><td>E3</td><td>= expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)</td></tr> </table> <p>Response:</p> <pre data-bbox="303 1747 734 1814" style="margin-left: 40px;">&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>	(null)	= master shelf	E1	= expansion shelf 1	E2	= expansion shelf 2	E3	= expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)										
(null)	= master shelf																		
E1	= expansion shelf 1																		
E2	= expansion shelf 2																		
E3	= expansion shelf 3 (or remote shelf if equipped with a remote shelf instead of an expansion shelf 3)																		



Chart 20. Copy Program from External Source to MIS Card (Contd)

STEP	PROCEDURE
8	<p><b>Caution: If the program download is interrupted before completion, the inactive bank will be empty. Any program residing in this bank will be lost. Do not interrupt the download.</b></p> <p>Transmit one of the following files to the inactive memory bank in the MIS card:</p> <p style="padding-left: 40px;">If the LOW BANK is active (as determined in Step 4), transmit the 50202.hi file. If the HI BANK is active (as determined in Step 4), transmit the 50202.low file.</p>
9	<p>Wait until the communication software indicates that the copying has been completed (may take up to 8 minutes).</p>
10	<p>Access level 5 is required to use this command. To switch to the program just copied to the MIS card, enter:</p> <pre style="padding-left: 40px;">INIT-SYS: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;::5;       aid           = MIS</pre> <p>Response:</p> <pre style="padding-left: 40px;">&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD</pre>
11	<p>This procedure is completed.</p>

Chart 21. GPS Information

TASK	PROCEDURE
<p>This chart provides the steps for displaying the GPS operating statistics.</p>	
<p>Display GPS Statistics</p>	<p>Access level 2 is required to use this command. Enter:</p> <pre>RTRV-GPS-STAT: [&lt;tid&gt;]:&lt;aid&gt;:&lt;ctag&gt;;</pre> <p>aid = GTI card slot (GTI-1 or GTI-2)</p> <p>Response:</p> <pre>&lt;sid&gt; &lt;date&gt; &lt;time&gt; M &lt;ctag&gt; COMPLD "&lt;aid&gt;" /* UTC-TIME=b, LOCATION=c, SAT-IN-VIEW=d, [SAT-e=f], ... GTIMDEV=g, OSC1FFREQ=h, OSC2FFREQ=i */</pre> <p>b = universal coordinated time (hours:minutes:seconds)</p> <p>c = format is ddmm.mmm-x-dddmm.mmm-y-aa  ddmm.mmm-x = latitude:  dd = degrees  mm.mmm = minutes  x = north (N) or south (S)  dddmm.mmm-y = longitude:  ddd = degrees  mm.mmm = minutes  x = east (E) or west (W)  aa = altitude in meters (can be negative, error is ±20 meters)</p> <p>d = number of satellites in view</p> <p>e = satellite number</p> <p>f = format is d1-d2-sn:  d1 = satellite azimuth (degrees relative to true north)  d2 = satellite elevation (degrees relative from horizontal)  sn = signal-to-noise ratio (dB)</p> <p>g = modified Allen deviation of the GTI card</p> <p>h = oscillator 1 fractional frequency</p> <p>i = oscillator 2 fractional frequency</p> <p><b>Note:</b> The system occasionally returns an SARB error message in response to the RTRV-GPS-STAT command. If this occurs, repeat the command.</p>

**Table H. Alarm/Event Summary**

<aid>	<condtype>	<conddescr>	Severity						
<p>Notes:</p> <ol style="list-style-type: none"> <li>The severities in this table are defined as follows:                             <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">MN = minor alarm</td> <td style="width: 50%;">SC = standing condition</td> </tr> <tr> <td>MJ = major alarm</td> <td>TC = transient condition</td> </tr> <tr> <td>NA = not alarmed</td> <td></td> </tr> </table> </li> <li>Up to 6 minutes may be required to detect and report an unequipped condition (UNEQUIPPED: IMPROPER CARD REMOVAL OR COMM FAILURE) from a GTI or an LTI card. This condition may be caused by card removal, cable removal, or loss of power to the LPR shelf.</li> <li>An asterisk (*) next to a severity indicates the following:                             <ul style="list-style-type: none"> <li>The severity can be changed using the SET-ATTR-PORT command</li> <li>The severity shown is the factory setting</li> </ul> </li> </ol>				MN = minor alarm	SC = standing condition	MJ = major alarm	TC = transient condition	NA = not alarmed	
MN = minor alarm	SC = standing condition								
MJ = major alarm	TC = transient condition								
NA = not alarmed									
CLK-x (x = 1-2)	ACTIVE	CLOCK IS SUPPLYING SIGNAL	SC						
	DRIFT	INPUT IS DRIFTING	MN						
	FREERUN	CLOCK FREERUNNING	SC						
	HOLDOVER	CLOCK IN HOLDOVER	MN						
	INACTIVE	CLOCK IS NOT SUPPLYING SIGNAL	SC						
	LOCKED	CLOCK CONVERGED ON REFERENCE INPUT	SC						
	NOT-LOCKED	CLOCK NOT CONVERGED ON REFERENCE INPUT	SC						
	TOLERANCE	SYSTEM INPUT TO CLOCK OUT OF TOLERANCE	MN						
GTI-x (x = 1-2)	ACQUIRED	ACQUIRED AT LEAST ONE SATELLITE	SC						
	CONVERGING	TIMING SIGNAL NOT YET STABLE	SC						
	FAIL	CARD FAULT: REFERENCE PLL OUT OF LOCK	MJ						
	FAIL	CARD FAIL: PRIMARY REFERENCE PLL OUT OF LOCK	MJ						
	FAIL	CARD FAIL: OSCILLATOR PLL OUT OF LOCK	MJ						
	FREQ-TOL	GPS FREQUENCY OUT OF TOLERANCE	SC						
	FUSE-x (x = 1-2)	LPR SHELF FUSE BLOWN OR POWER FAIL	MN						
	GPS-INVALID	GPS INVALID	MN/MJ/ SC						
	GTI-OUT-FAIL	LOSS OF TIMING OUTPUT SIGNAL	MN						
	GTR-COMM-LOS	GTR COMMUNICATIONS FAIL	MN						
	GTR-FAIL	GTR FAIL: ANTENNA CURRENT OUT OF TOLERANCE	MJ						
	GTR-FAIL	GTR FAIL:GTR PLL OUT OF LOCK	MJ						
	GTR-FAIL	GTR FAULT: NOT LOCKED TO UTC TIME - GTR OR SKY PROBLEM	MJ						
	GTR-FAIL	GTR FAIL: FLASH MEMORY FAIL	MJ						

Table H. Alarm/Event Summary (Contd)

<aid>	<condtype>	<conddescr>	Severity
GTI-x (Contd)	GTR-FAIL	GTR FAIL: RAM MEMORY FAIL	MJ
	GTR-GPS-LOS	LOSS OF GPS SIGNAL FROM GTR	MN
	GTR-LOCKED	GTR IS LOCKED	SC
	GTR-NOT-LOCKED	GTR IS NOT LOCKED TO GPS SIGNAL	SC
	GTR-PWR-FLT	GTR POWER FAULT	MN
	LOCKED	GTI IS LOCKED	SC
	MISMATCH	CARD INFORMATION DOES NOT MATCH DATABASE	SC
	NO-INPUTS	LOSS OF OSCILLATORS AND INPUT FROM ANTENNA	MJ
	OSC-x-LOS (x = 1-2)	LOSS OF EXTERNAL OSCILLATOR	MN
	OSC-x-TOL (x = 1-2)	EXTERNAL OSCILLATOR OUT OF TOLERANCE	MN
	SATELLITE	INSUFFICIENT SATELLITES IN VIEW < 3	SC
	SEARCH	SEARCHING FOR FIRST SATELLITE	SC
	TRACK	GTI TRACKING	SC
	UNEQUIPPED	IMPROPER CARD REMOVAL OR COMM FAILURE	MN/SC
	LTI-x (x = 1-2)	ACQUIRE	LORAN STATION FOUND
ANTENNA		CURRENT TO ANTENNA IS OUT OF TOLERANCE	MJ
FAIL		FAIL:TRANSFER OSC PLL OUT OF LOCK	MJ
FAIL		FAIL:SYNTHESIZER PLL OUT OF LOCK	MJ
FAIL		FAIL:PRIMARY REFERENCE PLL OUT OF LOCK	MJ
FAIL		FAIL:LOSS OF SIGNAL TO DSP OR DSP FAIL	MJ
FAIL		FAIL:PROCESSOR FAIL	MJ
FUSE-x (x = 1-2)		LPR SHELF FUSE BLOWN OR POWER FAIL	MN
GRI-LOCKED		LOCKED TO LORAN STATION	SC
HOLDOVER		LTI IN HOLDOVER	SC
LOCKED		LTI IS LOCKED	SC
LOS		LOSS OF TIMING OUTPUT SIGNAL	MN
NO-INPUTS		LOSS OF OSCILLATORS AND INPUT FROM ANTENNA	MN
OSC-LOS		LOSS OF BOTH LOCAL OSCILLATOR SIGNALS	MJ
OSC-x-LOS (x = 1-2)		LOSS OF EXTERNAL OSCILLATOR	MN

Table H. Alarm/Event Summary (Contd)

<aid>	<condtype>	<conddescr>	Severity
LTI-x (Contd)	SEARCH	SEARCHING FOR LORAN STATION	MN
	UNEQUIPPED	IMPROPER CARD REMOVAL OR COMM FAILURE	MN/SC
MIS	RESET	MIS HAS BEEN RESET	TC
MRC-x (x = 1-2)	ACTIVE	CARD IS SUPPLYING A SIGNAL TO THE CLOCK(S)	SC
	ALL-REF	LOSS OF ALL EXTERNAL INPUT REFERENCES	MJ
	CLOCK-x (x = 1-2)	LOSS OF CLOCK SIGNAL	MN
	FAIL	CARD FAIL:CLOCK SYNTHESIZER FAILURE	MJ
	FAIL	CARD FAIL: FRAMER FAILURE	MJ
	FAIL	CARD FAILED	MJ
	FFREQ-x (x = 1-2)	CLOCK DISQUALIFIED:FFREQ THRESHOLD EXCEEDED	MN
	INACTIVE	CARD IS NOT SUPPLYING A SIGNAL TO THE CLOCK(S)	SC
	MISMATCH	CARD INFORMATION DOES NOT MATCH DATABASE	MN
	UNEQUIPPED	IMPROPER CARD REMOVAL	MN/SC
MRC-x-y (x = 1-2, y = 1-4)	AIS	ALARM INDICATION SIGNAL RECEIVED	MN*
	BPV	BPV THRESHOLD EXCEEDED	MN*
	CRC	CRC THRESHOLD EXCEEDED	MN*
	FFREQ	REF INPUT FRACTIONAL FREQ THRESHOLD EXCEEDED	MN*
	LOS	LOSS OF EXTERNAL REFERENCE	MN*
	OOF	OOF DETECTED	MN*
	SWITCH	CARD NOW USING SPECIFIED INPUT SIGNAL	TC
PSM-x (x = 1-11)	CLOCK-x (x = 1-2)	LOSS OF CLOCK SIGNAL	MN
	FAIL	CARD FAIL:CLOCK SYNTHESIZER FAILURE	MJ
	FAIL	CARD FAIL: FRAMER FAILURE	MJ
	FAIL	CARD FAILED	MJ
	MISMATCH	CARD INFORMATION DOES NOT MATCH DATABASE	SC
	UNEQUIPPED	IMPROPER CARD REMOVAL	MN/SC

Table H. Alarm/Event Summary (Contd)

<aid>	<condtype>	<conddescr>	Severity
PSM-x-y (x = 1-11. y = 1-4)	AIS	ALARM INDICATION SIGNAL RECEIVED	MN*
	BPV	BPV THRESHOLD EXCEEDED	MN*
	CRC	CRC THRESHOLD EXCEEDED	MN*
	LOS	LOSS OF EXTERNAL REFERENCE	MN*
	MTIE <sub>x</sub> (x = 1, 4, 16, 128, 512, 900)	x SECOND THRESHOLD EXCEEDED (x = 1, 4, 16, 128, 512, 900)	MN*
	OOF	OOF DETECTED	MN*
	TDEV <sub>x</sub> (x = 1, 4, 16, 64, 128)	x SECOND THRESHOLD EXCEEDED (x = 1, 4, 16, 64, 128)	MN*
SHELF	ACTIVE	EXPANSION SHELF PRESENT	SC
	DLCMP	DOWNLOAD COMPLETED	TC
	DLIP	DOWNLOAD IN PROGRESS	TC
	FUSE-x (x = 1-2)	FUSE BLOWN OR POWER FAIL	MN
	GP	SHELF INPUT ALARM	MN
	GPMJ	GENERAL PURPOSE MAJOR ALARM ON SHELF	MJ
	GPMN	GENERAL PURPOSE MINOR ALARM ON SHELF	MN
	INACTIVE	EXPANSION SHELF NOT PRESENT	SC
	OVERRIDE	TIMING OUTPUT SOURCE SELECTED BY COMMAND	SC

Table H. Alarm/Event Summary (Contd)

<aid>	<condtype>	<conddescr>	Severity
TO-x (x = 1-12)	CLOCK-x (x = 1-2)	TIMING SIGNAL FROM CLOCK CARD DISQUALIFIED	SC
	FAIL	CARD FAIL:A/D FAILURE	MJ
	FAIL	CARD FAIL:INTERNAL FAILURE	MJ
	FAIL	CARD FAIL:REFERENCE VOLTAGE FAILURE	MJ
	FAIL	CARD FAIL:PLL OUT OF LOCK	MJ
	INPUT-x (x = 1-2)	TIMING SIGNAL FROM INPUT CARD DISQUALIFIED	SC
	MISMATCH	CARD INFORMATION DOES NOT MATCH DATABASE	SC
	MISMATCH	PROTECTION CARD CONFIGURATION MISMATCH OR PAIRED CARD MISSING	SC
	SOURCE-CLK-x (x = 1-2)	OUTPUT CARD IS USING SPECIFIED CLOCK CARD	SC
	SOURCE-INPUT-x (x = 1-2)	OUTPUT CARD IS USING SPECIFIED INPUT CARD	SC
	SWITCH	INPUT SWITCHED	TC
	SWITCH	FAILURE TO SWITCH TO CLK x (x = 1-2)	SC
	SWITCH	FAILURE TO SWITCH TO INPUT x (x = 1-2)	SC
	SWITCH	OUTPUT CARD PROTECTION SWITCH	TC
	UNEQUIPPED	IMPROPER CARD REMOVAL	MN/SC
TO-x-y (x = 1-12, y = 1-10)	PORT	OUTPUT PORT HAS FAILED	MN