

REPLACEMENT PARTS LIST

Notes: • Important safety notice:

 Components identified by \triangle mark have special characteristics important for safety.

Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.

When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.

• [M] indicates in Remarks columns parts that are supplied by MESA.

Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
		INTEGRATED CIRCUIT (S)		Q908	2SD2144S	TRANSISTOR	
						DIODE (S)	
IC101	LA1832MH-TEL	FM/AM IF AMP/AM OSC		D101	MA4051MTA	DIODE	\triangle
IC102	LC7218M-TE-L	PLL FREQUENCY SYNTHESIZER		D102	MA165	DIODE	
IC202	NJU7313AMT2	INPUT SELECTOR		D301	MA165	DIODE	
IC203	M5219FPTA	BUFFER AMP		D501, 502	MA185TA	DIODE	\triangle
IC204	M5218AFPE3	BUFFER AMP		D503	MA4150M	DIODE	\triangle
IC302	M62425FPE1	ELECTRONIC VOLUME		D504	MA4082LTA	DIODE	\triangle
IC551	STK311-010	RDS DECODER	[M]	D550, 551	MA165	DIODE	
IC552	LC65104A4F75	MICRO COMPUTER		D552	MA723TA	DIODE	
IC901	M38197MA119F	SYSTEM CONTROL/FL DRIVE		D601-604	RL1N4003N02	DIODE	\triangle
		TRANSISTOR(S)		D605	MA165	DIODE	
				D606, 607	MA719TA	DIODE	
Q101, 102	2SC2787L	TRANSISTOR		D609, 610	MA4082LTA	DIODE	\triangle
Q103, 104	2SC2785FE	TRANSISTOR		D611, 612	RL1N4003N02	DIODE	\triangle
Q106	UN4111	TRANSISTOR		D613, 614	MA185TA	DIODE	\triangle
Q107, 108	2SC3311ARSTA	TRANSISTOR		D615	MA4051MTA	DIODE	\triangle
Q110	2SC3311ARSTA	TRANSISTOR		D616	MA4062-H	DIODE	\triangle
Q201	UN4111	TRANSISTOR		D617	MA4300M	DIODE	\triangle
Q202	2SC3311A-Q	TRANSISTOR		D618-621	MA185TA	DIODE	\triangle
Q309, 310	2SA1309A-R	TRANSISTOR		D622	MA4039MTA	DIODE	\triangle
Q311, 312	2SC3311A-Q	TRANSISTOR		D632	MA165	DIODE	
Q313, 314	2SD2144S	TRANSISTOR		D651, 652	MA165	DIODE	
Q315, 316	UN4115	TRANSISTOR		D653	MA719TA	DIODE	
Q317, 318	2SC3311A-Q	TRANSISTOR		D901, 902	MA165	DIODE	
Q319	UN4115	TRANSISTOR		D903	SPR-305MDTF	L. E. D.	
Q501	2SC3940AQSTA	TRANSISTOR	\triangle	D910	1SS291TA	DIODE	
Q503	2SC3940AQSTA	TRANSISTOR	\triangle	D911	MA165	DIODE	
Q550, 551	UN4211	TRANSISTOR		D912	1SS291TA	DIODE	
Q552	UN411FTA	TRANSISTOR		D933	MA165	DIODE	
Q553	UN4211	TRANSISTOR		D939	MA165	DIODE	
Q601	2SD2137PQTA	TRANSISTOR	\triangle	D941	MA165	DIODE	
Q602	2SB1417PQTA	TRANSISTOR	\triangle	D960	MA165	DIODE	
Q603	2SD2137PQTA	TRANSISTOR	\triangle	D963	MA165	DIODE	
Q604	2SD2144S	TRANSISTOR				COMPONENT COMBINATION (S)	
Q605	2SD2137PQTA	TRANSISTOR	\triangle				
Q606	2SB621A-R	TRANSISTOR	\triangle	Z101	RLA22002M-T	COMPONENT COMBINATION	
Q614	2SB1417PQTA	TRANSISTOR	\triangle	Z102	RL122006M-T	COMPONENT COMBINATION	
Q901	UN4214TA	TRANSISTOR		Z901	RCDGP1U90XA	REMOTE SENSOR	
Q902	DTC143XSTP	TRANSISTOR				COIL (S)	
Q903	DTC143ESTP	TRANSISTOR					
Q904	2SC3311A-Q	TRANSISTOR		L101	ELESNR68MA	COIL	
Q905	UN411FTA	TRANSISTOR		L103	ELETR47MA9	COIL	
Q906	2SC3311A-Q	TRANSISTOR					
Q907	UN4119	TRANSISTOR					

Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
L104	ELEXT1R0KA9	COIL		CN101A	RJT057W007-1	CONNECTOR (7P)	
L105, 106	ELELN822KL	COIL		CN101B	RJU057W007	SOCKET (7P)	
L151	SLM1B10M-1M	COIL		CN102A	RJT057W007-1	CONNECTOR (7P)	
L191	ELESNR68MA	COIL		CN102B	RJU057W007	SOCKET (7P)	
L550	ELEXT101KA9	COIL		CN103A	RJT057W007-1	CONNECTOR (7P)	
L552	ELEXT101KA9	COIL		CN103B	RJU057W007	SOCKET (7P)	
L601	ELEXT1R0KA9	COIL		CN104A	RJT057W007-1	CONNECTOR (7P)	
L901	RLQA100JT-Y	COIL		CN104B	RJU057W007	SOCKET (7P)	
L902	ELEXT1R0KA9	COIL		CN502A	RJT057W007-1	CONNECTOR (7P)	
		FILTER(S)		CN502B	RJU057W007	SOCKET (7P)	
CF201	RLFFETNGD01L	CERAMIC FILTER		CN901A	RJSIA6821	CONNECTOR (21P)	
CF202	RLFFETNGD01L	CERAMIC FILTER		CN901B	RJSIA6221-1	CONNECTOR (21P)	
		OSCILLATOR(S)		CN902A	RJSIA6814	CONNECTOR (14P)	
X101	RSXZ456KM07M	OSCILLATOR (456KHz)		CN902B	RJSIA6214-1	CONNECTOR (14P)	
X102	RLFDGT05DD	OSCILLATOR (10. 65MHz)		CN904A	RJT066H05A	CONNECTOR (5P)	
X103	RSXC7M20S05T	OSCILLATOR (7. 2MHz)		CN904B	RJU066H05	SOCKET (5P)	
X551	RSXZ456KM07M	OSCILLATOR (456KHz)		CP105	RJT057W007-1	CONNECTOR (7P)	
X552	RVCST4R00MT	OSCILLATOR (4MHz)		JK601	RJT065K15	CONNECTOR (15P)	
X901	RSXC4M19S02T	OSCILLATOR (4. 19MHz)		JK602	RJT065K19	CONNECTOR (19P)	
		DISPLAY TUBE(S)		JK603	RJT065K20	CONNECTOR (20P)	
FL901	RSL0208-F	DISPLAY TUBE				EARTH PLATE(S)	
		FM FRONT END(S)		E601, 602	SNE1004-2	EARTH PLATE	
Z120	RAL0019	FM FRONT END				JACK(S)	
		SWITCH(ES)		JK101	RJH5210M	FM/AM ANT	
S901	EVQ21405R	RDS DISPLAY MODE		JK202	SJF3069N	EXT IN/OUT	
S902	EVQ21405R	FM/AM					
S903	EVQ21405R	TUNING MODE					
S904	EVQ21405R	CLOCK/TIMER MODE					
S905	EVQ21405R	CLOCK/TIMER SET					
S906	EVQ21405R	TUNING /TIME ADJ. DOWN					
S907	EVQ21405R	TUNING /TIME ADJ. UP					
S916	EVQ21405R	TIMER PLAY					
S917	EVQ21405R	TIMER REC					
S918	EVQ21405R	INPUT SELECTOR					
		RELAY(S)					
RL601	RSY0017M-0	RELAY	△				
		CONNECTOR(S) AND SOCKET(S)					
CN105	RJU057W007	CONNECTOR (7P)					


RESISTORS AND CAPACITORS

Notes: * Capacity values are in microfarads (μF) unless specified otherwise, P=Pico-farads (pF) F=Farads (F)
 * Resistance values are in ohms, unless specified otherwise, 1K=1,000 (OHM), 1M=1,000k (OHM)

Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks
		RESISTORS	R235, 236	ERDS2TJ822	1/4W 8. 2K	R601, 602	ERDS2FCVJ4R7T	1/4W 4. 7 Δ
			R237, 238	ERDS2TJ123	1/4W 12K	R603, 604	ERDS2TJ102	1/4W 1K
			R239, 240	ERDS2TJ102	1/4W 1K	R605	ERDS2TJ101	1/4W 100
R103	ERDS2TJ101	1/4W 100	R241-243	ERDS2TJ103	1/4W 10K	R606	ERDS2TJ393	1/4W 39K
R104	ERDS2TJ103	1/4W 10K	R331, 332	ERDS2TJ102	1/4W 1K	R607	ERDS2TJ153	1/4W 15K
R105	ERDS2TJ471	1/4W 470	R333, 334	ERDS2TJ104	1/4W 100K	R609	ERQ16NKW2R2E	1/6W 2. 2 Δ
R106	ERDS2TJ474	1/4W 470K	R335, 336	ERDS2TJ562	1/4W 5. 6K	R610	ERDS2TJ222	1/4W 2. 2K
R107	ERDS2TJ331	1/4W 330	R337, 338	ERDS2TJ123	1/4W 12K	R612	ERDS2TJ472	1/4W 4. 7K
R108	ERDS2TJ474	1/4W 470K	R339, 340	ERDS2TJ471	1/4W 470	R613, 614	ERDS2TJ682T	1/4W 6. 8K
R109	ERDS2TJ331	1/4W 330	R341, 342	ERDS2TJ222	1/4W 2. 2K	R615	ERDS2TJ103	1/4W 10K
R110	ERDS2TJ102	1/4W 1K	R343, 344	ERDS2TJ224T	1/4W 220K	R616	ERDS2FVJ4R7T	1/4W 4. 7 Δ
R112	ERDS2TJ104	1/4W 100K	R345-348	ERDS2TJ103	1/4W 10K	R621, 622	ERDS2TJ151	1/4W 150
R113	ERDS2TJ103	1/4W 10K	R349, 350	ERDS2TJ102	1/4W 1K	R623, 624	ERDS2TJ123	1/4W 12K
R114	ERDS2TJ562	1/4W 5. 6K	R351	ERDS2TJ182	1/4W 1. 8K	R627, 628	ERDS2TJ472	1/4W 4. 7K
R115	ERDS2TJ561	1/4W 560	R352	ERDS2TJ102	1/4W 1K	R629, 630	ERDS2TJ682T	1/4W 6. 8K
R116	ERDS2TJ102	1/4W 1K	R353	ERDS2TJ182	1/4W 1. 8K	R631, 632	ERDS2TJ471	1/4W 470
R117	ERDS2TJ823T	1/4W 82K	R354, 355	ERDS2TJ222	1/4W 2. 2K	R635, 636	ERDS2TJ472	1/4W 4. 7K
R118	ERDS2TJ472	1/4W 4. 7K	R357, 358	ERDS2TJ391	1/4W 390	R637, 638	ERDS2TJ150T	1/4W 15
R119	ERDS2TJ103	1/4W 10K	R359, 360	ERDS2TJ122	1/4W 1. 2K	R641, 642	ERDS2TJ471	1/4W 470
R120	ERDS2TJ473	1/4W 47K	R361, 362	ERDS2TJ223	1/4W 22K	R651-654	ERDS2TJ2R2T	1/4W 2. 2
R121	ERDS2TJ332	1/4W 3. 3K	R363, 364	ERDS2TJ102	1/4W 1K	R656	ERDS2TJ221	1/4W 220
R122	ERDS2TJ272T	1/4W 2. 7K	R365, 366	ERDS2TJ105T	1/4W 1M	R901	ERDS2TJ821	1/4W 820
R124	ERDS2TJ271	1/4W 270	R367, 368	ERDS2TJ104	1/4W 100K	R902	ERDS2TJ102	1/4W 1K
R125, 126	ERDS2TJ152	1/4W 1. 5K	R369, 370	ERDS2TJ102	1/4W 1K	R903	ERDS2TJ122	1/4W 1. 2K
R127	ERDS2TJ103	1/4W 10K	R371	ERDS2TJ224T	1/4W 220K	R904	ERDS2TJ152	1/4W 1. 5K
R128	ERDS2TJ820	1/4W 82	R372	ERDS2TJ105T	1/4W 1M	R905	ERDS2TJ182	1/4W 1. 8K
R129	ERDS2TJ473	1/4W 47K	R373	ERDS2TJ222	1/4W 2. 2K	R906	ERDS2TJ222	1/4W 2. 2K
R130	ERDS2TJ103	1/4W 10K	R374	ERDS2TJ182	1/4W 1. 8K	R907	ERDS2TJ332	1/4W 3. 3K
R132	ERDS2TJ103	1/4W 10K	R375, 376	ERDS2TJ102	1/4W 1K	R908	ERDS2TJ223	1/4W 22K
R133-137	ERDS2TJ102	1/4W 1K	R377, 378	ERDS2EJ121	1/4W 120	R909	ERDS2TJ103	1/4W 10K
R138	ERDS2TJ103	1/4W 10K	R379, 380	ERDS2TJ223	1/4W 22K	R910	ERDS2TJ562	1/4W 5. 6K
R139, 140	ERDS2TJ272T	1/4W 2. 7K	R381	ERDS2TJ105T	1/4W 1M	R911	ERDS2TJ681	1/4W 680
R141, 142	ERDS2TJ102	1/4W 1K	R382	ERDS2TJ472	1/4W 4. 7K	R915	ERDS2TJ222	1/4W 2. 2K
R143, 144	ERDS2TJ222	1/4W 2. 2K	R383	ERDS2TJ223	1/4W 22K	R916-919	ERDS2TJ103	1/4W 10K
R145, 146	ERDS2TJ821	1/4W 820	R397, 398	ERQ16NKW2R2E	1/6W 2. 2 Δ	R920-922	ERDS2TJ102	1/4W 1K
R147, 148	ERDS2TJ474	1/4W 470K	R501	ERDS2TJ152	1/4W 1. 5K	R923	ERDS2TJ391	1/4W 390
R149	ERDS2TJ680T	1/4W 68	R502	ERDS2TJ221	1/4W 220	R924, 925	ERDS2TJ102	1/4W 1K
R171, 172	ERDS2TJ102	1/4W 1K	R506	ERDS2TJ152	1/4W 1. 5K	R926, 927	ERDS2TJ101	1/4W 100
R173	ERDS2TJ471	1/4W 470	R507	ERDS2TJ221	1/4W 220	R928	ERDS2TJ102	1/4W 1K
R175	ERDS2TJ102	1/4W 1K	R508, 509	ERDS2TJ153	1/4W 15K	R929	ERDS2TJ101	1/4W 100
R176	ERDS2TJ391	1/4W 390	R511, 512	ERDS2TJ122	1/4W 1. 2K	R930-932	ERDS2TJ102	1/4W 1K
R177	ERDS2TJ472	1/4W 4. 7K	R550	ERDS2TJ472	1/4W 4. 7K	R934	ERDS2TJ101	1/4W 100
R205, 206	ERDS2TJ224T	1/4W 220K	R554	ERDS2TJ102	1/4W 1K	R935	ERDS2TJ102	1/4W 1K
R207, 208	ERDS2TJ102	1/4W 1K	R555	ERDS2TJ333	1/4W 33K	R936	ERDS2TJ101	1/4W 100
R209-212	ERDS2TJ822	1/4W 8. 2K	R562	ERDS2TJ473	1/4W 47K	R938	ERDS2TJ102	1/4W 1K
R213, 214	ERDS2TJ102	1/4W 1K	R563	ERDS2TJ332	1/4W 3. 3K	R939	ERDS2TJ101	1/4W 100
R225, 226	ERDS2TJ122	1/4W 1. 2K	R565-567	ERDS2TJ332	1/4W 3. 3K	R940, 941	ERDS2TJ393	1/4W 39K
R229-231	ERDS2TJ222	1/4W 2. 2K	R568-571	ERDS2TJ101	1/4W 100	R942	ERDS2TJ472	1/4W 4. 7K
R233, 234	ERDS2TJ223	1/4W 22K	R576	ERDS2TJ102	1/4W 1K	R944	ERDS2TJ473	1/4W 47K

Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks
R945, 946	ERDS2TJ102	1/4W 1K	C132	ECBT1H102KB5	50V 1000P	C510	RCE1AKA101BG	10V 100U
R947, 948	ERDS2TJ103	1/4W 10K	C133, 134	ECBT1H270JU5	50V 27P	C513	ECBT1H102KB5	50V 1000P
R950	ERDS2TJ102	1/4W 1K	C135, 136	ECBT1C103KS5	16V 0.01U	C550, 551	ECA0JKF101B	6.3V 100U
R951	ERDS2TJ104	1/4W 100K	C137, 138	ECBT1H561KB5	50V 560P	C557	ECBT1H102KB5	50V 1000P
R952, 953	ERDS2TJ102	1/4W 1K	C139, 140	ECBT1C682KR5	16V 6800P	C558	ECEA0JKA101B	6.3V 100U
R954	ERDS2TJ101	1/4W 100	C141-144	ECEA1HKA010B	50V 1U	C559, 560	ECEA1HKA010B	50V 1U
R955	ERDS2TJ824	1/4W 820K	C145	ECBT1H220JC5	50V 22P	C570	ECBT1H102KB5	50V 1000P
R956	ERDS2TJ101	1/4W 100	C148	ECBT1C103NS5	16V 0.01U	C601, 602	ECKT1H223ZF	50V 0.022U
R957	ERDS2TJ102	1/4W 1K	C149	ECBT1H104ZF5	50V 0.1U	C603	ECA1EM102B	25V 1000U Δ
R958	ERDS2TJ471	1/4W 470	C171, 172	ECBT1H102KB5	50V 1000P	C604	RCE1EM471BV	25V 470U Δ
R959	ERDS2TJ103	1/4W 10K	C173	ECEA1CKA220B	16V 22U	C605, 606	ECBT1E103ZF	25V 0.01U
R962	ERDS2TJ473	1/4W 47K	C174	RCE1CKA100BG	16V 10U	C607, 608	RCE1AKA470BG	10V 47U
R965	ERDS2TJ472	1/4W 4.7K	C181	ECBT1H471KB5	50V 470P	C609	ECBT1H102KB5	50V 1000P
R966	ERDS2TJ123	1/4W 12K	C196	ECBT1H102KB5	50V 1000P	C610, 611	ECBT1H104ZF5	50V 0.1U
R967	ERDS2TJ472	1/4W 4.7K	C205-208	ECBT1H101KB5	50V 100P	C612	RCE1EM471BV	25V 470U
R968, 969	ERDS2TJ152	1/4W 1.5K	C209, 210	ECBT1H180J5	50V 18P	C613	ECBT1E103ZF	25V 0.01U
R971	ERDS2TJ104	1/4W 100K	C211	ECBT1H102KB5	50V 1000P	C614	RCE1AKA470BG	10V 47U
R972	ERDS2TJ101	1/4W 100	C223, 224	ECBT1H104ZF5	50V 0.1U	C615	ECEA1EKA101B	25V 100U
R973	ERDS2TJ151	1/4W 150	C225-227	ECBT1H470J5	50V 47P	C616	ECA1HM470B	50V 47U
R974	ERDS2TJ153	1/4W 15K	C231, 232	ECBT1E103ZF	25V 0.01U	C617	ECA1HM470B	50V 47U Δ
R975	ERDS2TJ473	1/4W 47K	C233, 234	ECBT1H102KB5	50V 1000P	C618	ECA1JM470B	63V 47U
R976	ERDS2TJ272T	1/4W 2.7K	C235, 236	ECBT1H101KB5	50V 100P	C619	ECBT1E103ZF	25V 0.01U
R978-992	ERDS2TJ104	1/4W 100K	C240	ECBT1H102KB5	50V 1000P	C620	RCE1VKA100BG	35V 10U
R993, 994	ERDS2TJ102	1/4W 1K	C301	ECBT1H102KB5	50V 1000P	C622	ECEA1VKA470B	35V 47U
R997-999	ERDS2TJ102	1/4W 1K	C321, 322	ECBT1E103ZF	25V 0.01U	C623	RCE1AKA101BG	10V 100U
			C323, 324	ECBT1H102KB5	50V 1000P	C631-636	ECBT1H101KB5	50V 100P
		CAPACITORS	C325, 326	ECBT1H101KB5	50V 100P	C638	ECBT1H104ZF5	50V 0.1U
			C327, 328	RCE1CKA470BG	16V 47U	C651-653	ECBT1H104ZF5	50V 0.1U
C101	ECBT1C103NS5	16V 0.01U	C333, 334	ECBT1H221KB5	50V 220P	C654	ECBT1C105ZF5	16V 1U
C103	ECBT1C103NS5	16V 0.01U	C335, 336	RCE1CKA100BG	16V 10U	C655	ECQV1H24JM3	50V 0.22U
C104, 105	ECBT1H102KB5	50V 1000P	C337, 338	ECEA1CKA220B	16V 22U	C901-904	ECBT1H471KB5	50V 470P
C106	ECBT1C103NS5	16V 0.01U	C339, 340	RCE1CKA100BG	16V 10U	C905, 906	ECBT1H102KB5	50V 1000P
C107	ECBT1H473ZF5	50V 0.047U	C341, 342	ECEA1AKN100B	10V 10U	C907	ECBT1H104ZF5	50V 0.1U
C108	ECBT1H8R2KC5	50V 8.2P	C343	RCE1CKA100BG	16V 10U	C908	ECBT1E103ZF	25V 0.01U
C109, 110	ECBT1C103NS5	16V 0.01U	C344, 345	ECBT1H470J5	50V 47P	C909	ECEA1HKA2R2B	50V 2.2U
C111	ECEA1EKA4R7B	25V 4.7U	C348	ECEA1CKA330B	16V 33U	C910	RCE1CKA100BG	16V 10U
C112	ECBT1C103NS5	16V 0.01U	C349	ECEA1HKA010B	50V 1U	C911	ECBT1H270JU5	50V 27P
C113	ECBT1H102KB5	50V 1000P	C350	ECEA0JKA470B	6.3V 47U	C912	ECBT1H20GC5	50V 22P
C114	RCE1HKA3R3BG	50V 3.3U	C351, 352	RCE1CKA100BG	16V 10U	C915	ECBT1E103ZF	25V 0.01U
C115	ECEA1EKA4R7B	25V 4.7U	C355	ECEA1CKA330B	16V 33U	C916, 917	ECEA1HKA010B	50V 1U
C116	ECBT1C822KS5	16V 8200P	C356	ECBT1H104ZF5	50V 0.1U	C918	ECBT1H104ZF5	50V 0.1U
C117	ECQP1391JZ	100V 390P	C357	RCE1AKA101BG	10V 100U	C919	RCE0JU102BV	6.3V 1000U
C118, 119	ECFR1C103KR	16V 0.01U	C358-361	ECBT1H102KB5	50V 1000P	C920	ECBT1E103ZF	25V 0.01U
C120, 121	ECEA1HKA010B	50V 1U	C365	ECEA0JKA470B	6.3V 47U	C921	ECA0JKF101B	6.3V 100U
C122	ECEA1HKA2R2B	50V 2.2U	C371	ECBT1H102KB5	50V 1000P	C922	ECEA0JKA221B	6.3V 220U
C123	ECEA1HKA010B	50V 1U	C391, 392	ECEA1CKA101B	16V 100U	C924	ECBT1H102KB5	50V 1000P
C124	ECBT1H102KB5	50V 1000P	C393, 394	ECBT1H102KB5	50V 1000P	C951-958	ECBT1H101KB5	50V 100P
C125	ECBT1H150JC5	50V 15P	C501	ECEA1EKA101B	25V 100U			
C126	ECBT1H473ZF5	50V 0.047U	C502	ECA1VM101B	35V 100U			
C127	ECEA1CKA220B	16V 22U	C503	ECBT1E103ZF	25V 0.01U			
C128	ECBT1H102KB5	50V 1000P	C504	ECEA1EKA101B	25V 100U			
C129, 130	ECEA0JKA101B	6.3V 100U	C509	ECBT1E103ZF	25V 0.01U			

CABINET PARTS LOCATION

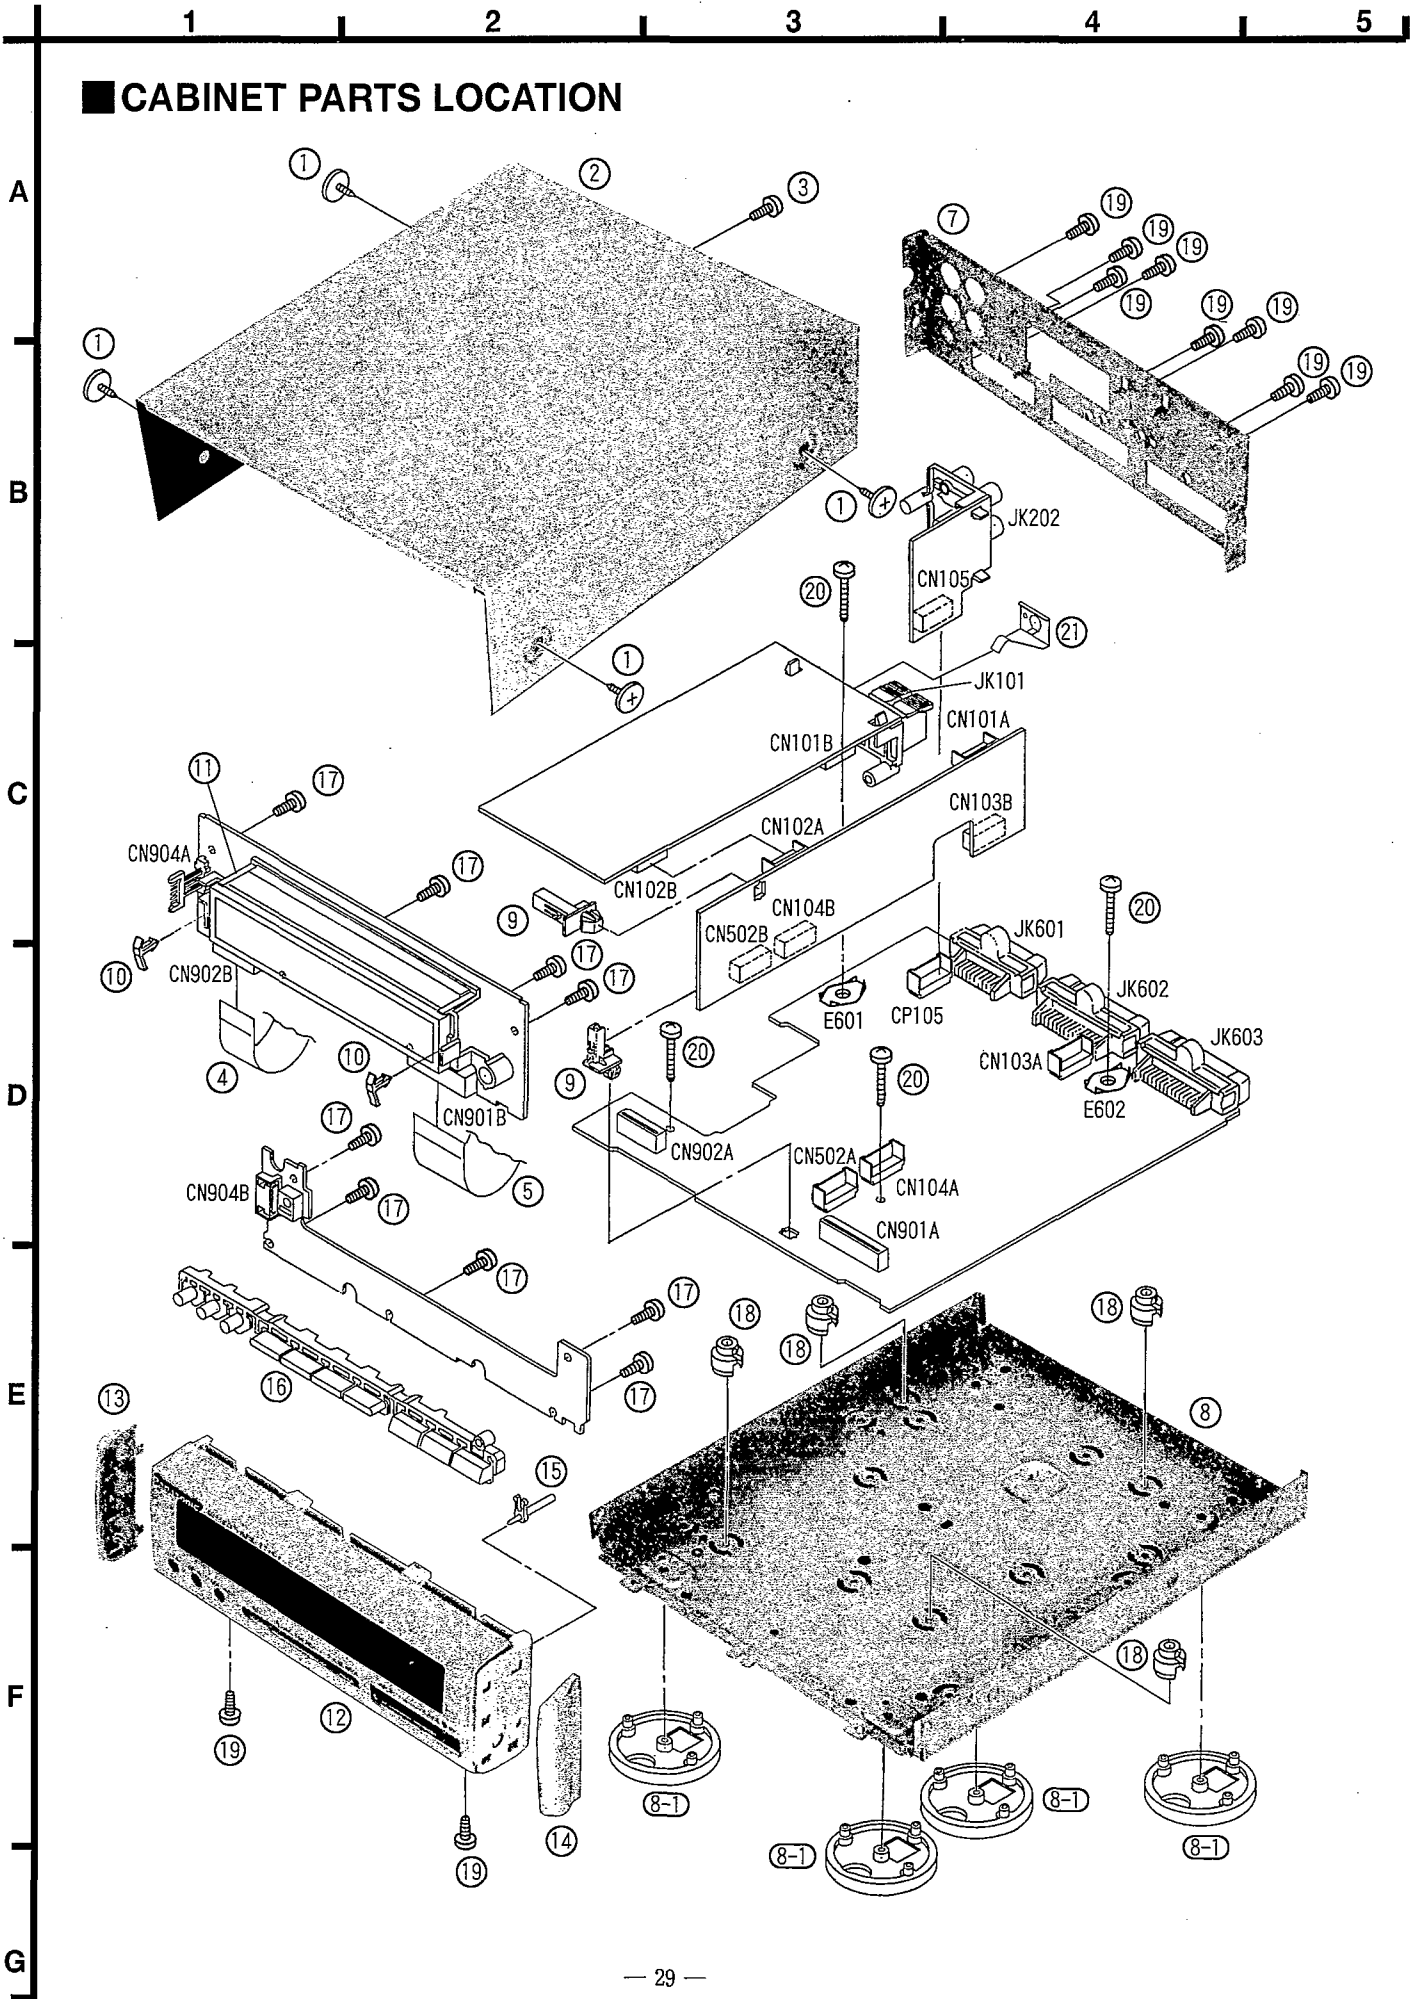

REPLACEMENT PARTS LIST

Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
		CABINET AND CHASSIS		17	XTBS26+8J	SCREW	
				18	SHE170-2	P. C. B. SUPPORT	
				19	XTBS3+8JFZ1	SCREW	
1	RHD30007-S	SCREW		20	XTB3+12JFZ	SCREW	
2	RKMO327A-S	CABINET		21	BMC0313	TUNER EARTH SPRING	
3	XTB3+8JFZ	SCREW					
4	REZO883	FFC(14P)					
5	REZO884	FFC(21P)					
7	RGRD242B-A	REAR PANEL					
8	RFKJTHD7-N	BOTTOM CHASSIS ASS'Y					
8-1	RKA0076-N1	FOOT					
9	RMNO203	P. C. B. HOLDER					
10	RMNO195	FL HOLD PIECE					
11	RMNO381	FL HOLDER					
12	RFKGTCA01E-N	FRONT PANEL ASS'Y					
13	RGK0821-S	SIDE ORNAMENT (L)					
14	RGK0822-S	SIDE ORNAMENT (R)					
15	RGL0334-1Q	PANEL LIGHT					
16	RGU1394A-S	BUTTON					

MEMO

1020