

PRELIMINARY PRODUCT REVIEW

Rev 0; 6/05



Microcontroller with Analog Comparator

MAXQ3212

General Description

The MAXQ3210 microcontroller is a low-power, 16-bit RISC device that incorporates a driver for a high-output piezoelectric horn/transducer, an analog comparator, and a high-current I/O pin for directly driving an LED. The device is uniquely suited for cost-conscious applications such as alarm systems, system monitors, and white goods, but can be used in any application that requires high performance and low-power operation. The high-performance 16-bit RISC core and 8-bit accumulators are complemented by standard amenities such as timers and digital I/O. The power consumption per MIPS ratio is among the best in the 16-bit microcontroller industry.

The MAXQ3212 is a general-purpose version of the MAXQ3210. The MAXQ3212 is powered directly from a 6V–9V source, such as a battery, but an internal voltage regulator operates the core at 5V.

A 1kWord EEPROM program memory contains customer application code and software algorithms. Software is programmable in-system by the ROM-based bootloader and also in-application programmable under user software control. The device provides 64 bytes of volatile SRAM and 128 bytes of EEPROM in the data memory space. Contact Dallas Semiconductor concerning the availability of ROM-based devices for high-volume, low-cost applications.

Applications

Gas and Chemical Sensors
Environmental Systems
Battery-Powered and Portable Devices
Electrochemical and Optical Sensors
Industrial Control
Home Appliances

Ordering Information

PART	TEMP RANGE	MEMORY	PIN-PACKAGE
MAXQ3212-EJX	-40°C to +85°C	1kWord EEPROM	24 TSSOP
MAXQ3212+EJX	-40°C to +85°C	1kWord EEPROM	24 TSSOP
MAXQ3212-EMX	-40°C to +85°C	1kWord EEPROM	24 PDIP
MAXQ3212+EMX	-40°C to +85°C	1kWord EEPROM	24 PDIP

A "+" denotes a Pb-free/RoHS-compliant device.



Features


- ◆ **High-Performance, Low-Power, 16-Bit RISC Core**
 - DC to 3.58MHz Operation, Approaching 1MIPS per MHz
 - 6V to 9.5V External Voltage Supply Operates from Single 9V Battery
 - 5.0V Nominal Internal Operation
 - Up to 15 General-Purpose I/O Pins
 - 33 Instructions, Most Single-Cycle
 - Two Independent Data Pointers Accelerate Data Movement with Automatic Increment/Decrement
 - Two Loop Counters
 - 4-Level Hardware Stack
 - 16-Bit Instruction Word, 16-Bit Data Bus
 - 16 x 8-Bit Accumulators
 - 16 x 16 General-Purpose Working Registers
 - Optimized for C Compiler (High-Speed/Density Code)
 - JTAG-Like Debug/Visibility Port
- ◆ **Program and Data Memory**
 - 1kWord EEPROM Program Memory, Mask ROM for High-Volume Applications
 - 128 Bytes EEPROM Data Memory
 - 15,000 EEPROM Write/Erase Cycles
 - 64 Bytes SRAM Data Memory
 - In-System Programming
- ◆ **Peripheral Features**
 - 16-Bit Programmable Timer/Counter with Prescaler
 - High-Current I/O Pin Suitable for LED Drive
 - Programmable Watchdog Timer
 - Selectable Power-Fail Reset
 - Power-on Reset (POR)
 - Wake-Up Timer
 - Internal 4kHz Ring Oscillator
- ◆ **Flexible Programming Interface**
 - Bootloader Simplifies Programming
 - In-System Programming Through JTAG
 - Supports In-Application Programming of EEPROM Memory
- ◆ **Ultra-Low-Power Consumption**
 - <6mA at 3.58MHz
 - 500nA Standby Current (typ)
 - Low-Power Divide-by-256 Mode
- ◆ **Analog Features**
 - Analog Comparator Uses Internal or External Voltage Reference
 - +2.5V Reference Output Available

PRELIMINARY PRODUCT REVIEW


Microcontroller with Analog Comparator

MAXQ3212

Functional Diagram

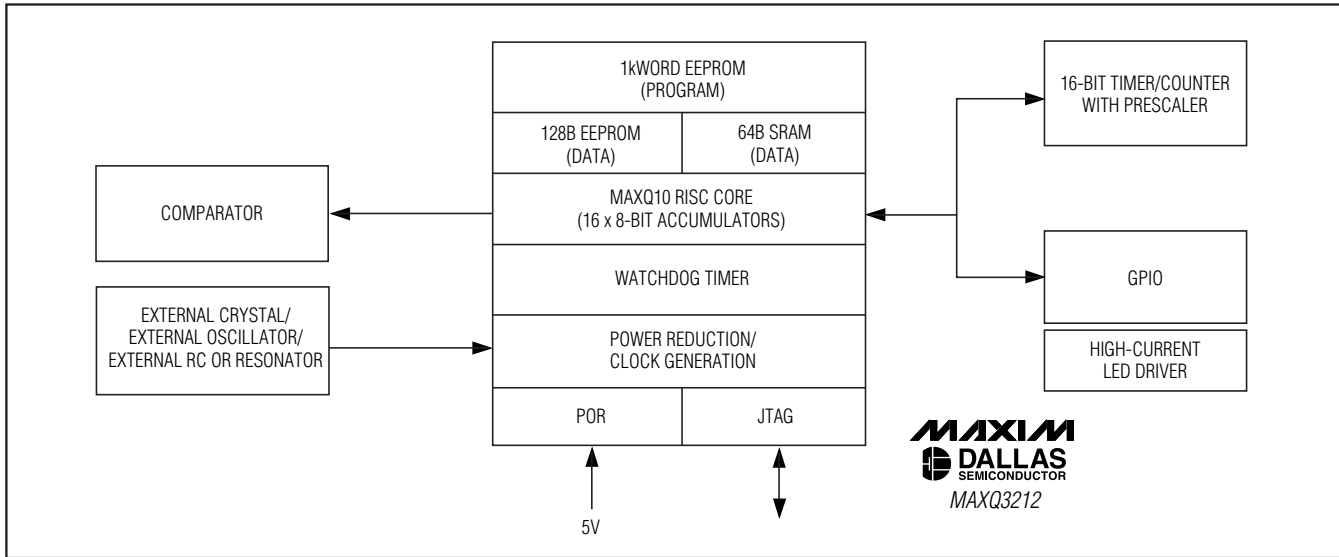

Typical Operating Circuit

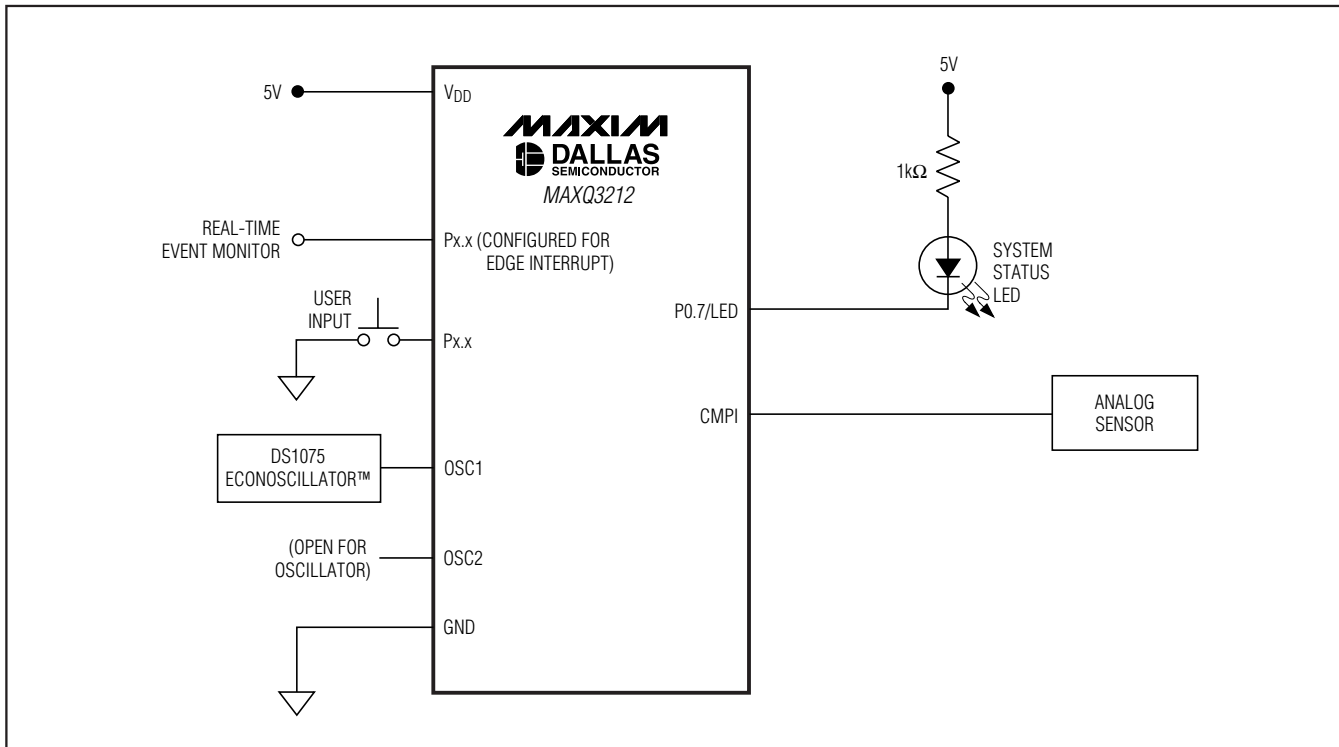

EconOscillator is a trademark of Dallas Semiconductor.