

**TEKTRONIX®**

**465 OSCILLOSCOPE**

**SERVICE**

**INSTRUCTION MANUAL**

Tektronix, Inc.  
P.O. Box 500  
Beaverton, Oregon 97005

Serial Number \_\_\_\_\_

070-1330-00

1272



## WARRANTY

All TEKTRONIX instruments are warranted against defective materials and workmanship for one year. Any questions with respect to the warranty should be taken up with your TEKTRONIX Field Engineer or representative.

All requests for repairs and replacement parts should be directed to the TEKTRONIX Field Office or representative in your area. This will assure you the fastest possible service. Please include the instrument Type Number or Part Number and Serial Number with all requests for parts or service.

Specifications and price change privileges reserved.

Copyright © 1972 by Tektronix, Inc., Beaverton, Oregon.  
Printed in the United States of America. All rights reserved.  
Contents of this publication may not be reproduced in any form without permission of Tektronix, Inc.

U.S.A. and foreign TEKTRONIX products covered by U.S. and foreign patents and/or patents pending.

TEKTRONIX is a registered trademark of Tektronix, Inc.

# TABLE OF CONTENTS

<b>SECTION 1</b>	<b>465 SPECIFICATIONS</b>	<b>Page</b>
	Introduction	1-1
	Vertical Deflection System	1-1
	Triggering	1-1
	Horizontal Deflection System	1-2
	X-Y Operation	1-3
	Calibrator	1-3
	Z Axis Input	1-3
	Signal Outputs	1-3
	Power Source	1-3
	Cathode-Ray Tube	1-3
	Supplemental Information	
	General	1-3
	Vertical Deflection System	1-3
	Triggering	1-4
	Horizontal Deflection System	1-4
	Calibrator	1-4
	External Z Axis Input	1-4
	Output Signals	1-4
	Cathode-Ray Tube	1-4
<b>SECTION 2</b>	<b>OPERATING INFORMATION</b>	
	Introduction	2-1
	Instrument Repackaging	2-1
	Operating Voltage	2-1
	Controls And Connectors	
	General	2-2
	Cathode-Ray Tube (CRT) and Display	2-2
	Vertical Deflection System	2-2
	A and B Triggering	2-4
	A and B Sweep	2-5
	Calibrator and Power	2-6
	Rear Panel	2-6
	Obtaining Basic Displays	
	Introduction	2-6
	Normal Sweep Display	2-6
	Magnified Sweep Display	2-7
	Delayed Sweep Display	2-7
	Mixed Sweep Display	2-7
	X-Y Display	2-7
<b>SECTION 3</b>	<b>CIRCUIT DESCRIPTION</b>	
	Introduction	3-1
	Digital Logic	3-1
	Block Diagram	
	General	3-1
	Channel 1 Preamp	
	General	3-3
	Input Coupling	3-3
	Input Attenuator	3-4
	Scale-Factor Switching Circuit	3-4
	Source Follower Stage	3-4
	First Cascode Amplifier Stage	3-4
	Second Cascode Amplifier Stage	3-4
	Third Cascode Amplifier Stage	3-5
	Channel 2 Preamp	
	General	3-5
	Second Cascode Amplifier	3-5
	Third Cascode Amplifier	3-6

## TABLE OF CONTENTS (cont)

SECTION 3	CIRCUIT DESCRIPTION (cont)	Page
	Vertical Switching Circuit	
	General	3-6
	Diode Gates	3-6
	Switching Multivibrator	3-7
	Delay-Line Driver	3-8
	Reference Feedback Amplifier	3-8
	Normal Trigger Pickoff Amplifier	3-8
	Vertical Output Amplifier	
	General	3-8
	Delay Line	3-9
	Output Amplifier	3-9
	A and B Trigger Generators	
	General	3-9
	Trigger Source	3-9
	Trigger Coupling	3-9
	Input Source Follower	3-9
	Paraphase Amplifier	3-9
	Tunnel Diode Driver	3-10
	A And B Sweep Generators	
	General	3-10
	Disconnect Amplifier	3-10
	Sawtooth Sweep Generator	3-11
	Output Buffer Amplifier	3-11
	Sweep Start Amplifier	3-11
	Logic Multivibrator	3-11
	B Sweep Generator Differences	3-11
	Sweep And Z Axis Logic Circuit	
	General	3-11
	A Sweep Gate	3-11
	B Sweep Gate	3-12
	Sweep Control Integrated Circuit	3-12
	A Sweep Holdoff Amplifier	3-13
	B Sweep Holdoff Amplifier	3-13
	A Sweep Z-Axis Gate	3-13
	B Sweep Z-Axis Gate	3-13
	+A GATE And +B GATE Emitter Followers	3-13
	B Sweep Latch	3-14
	Horizontal Amplifier	
	General	3-14
	X-Axis Amplifier	3-14
	Input Paraphase Amplifier	3-15
	Gain Setting Amplifier	3-15
	Output Amplifier	3-15
	CRT Circuit	
	General	3-15
	High-Voltage Oscillator	3-16
	High-Voltage Regulator	3-16
	High-Voltage Rectifiers and Output	3-17
	CRT Control Circuits	3-17
	Z-Axis Amplifier	3-17
	DC Restorer Circuit	3-17
	Calibrator	
	General	3-18
	Multivibrator	3-18
	Output Amplifier	3-18
	A Trigger View Amplifier	
	General	3-18
	Amplifier	3-18

## TABLE OF CONTENTS (cont)

SECTION 3	CIRCUIT DESCRIPTION (cont)	Page
	Low-Voltage Power Supply	
	General	3-19
	Power Input	3-20
	Secondary Circuit	3-20
	Fan Motor Circuit	
	General	3-20
SECTION 4	MAINTENANCE	
	Cabinet Removal	4-1
	Preventive Maintenance	
	General	4-1
	Cleaning	4-1
	Lubrication	4-2
	Transistors Checks	4-2
	Recalibration	4-2
	Corrective Maintenance	
	General	4-2
	Obtaining Replacement Parts	4-2
	Soldering Techniques	4-3
	Component Replacement	4-3
	Recalibration After Repair	4-5
	Instrument Repackaging	4-6
SECTION 5	CALIBRATION	
	Calibration Interval	5-1
	TEKTRONIX Field Service	5-1
	Using This Procedure	5-1
	Test Equipment Required	5-1
	Performance Check	
	Vertical System Check	5-6
	Trigger System Check	5-11
	Horizontal System Check	5-13
	Short-Form Calibration	
	Power Supplies And Display	5-16
	Vertical System	5-17
	Trigger System	5-19
	Horizontal System	5-21
	Detailed Calibration	
	Power Supply	5-27
	Display & Z-Axis	5-28
	Vertical System	5-30
	Trigger System	5-43
	Horizontal System	5-53
	Calibrator, Gates, & Ext Z-Axis	5-60
SECTION 6	ELECTRICAL PARTS LIST	
SECTION 7	DIAGRAMS & CIRCUIT BOARD ILLUSTRATIONS	
SECTION 8	MECHANICAL PARTS LIST, ACCESSORIES AND PACKAGING	
CHANGE INFORMATION		

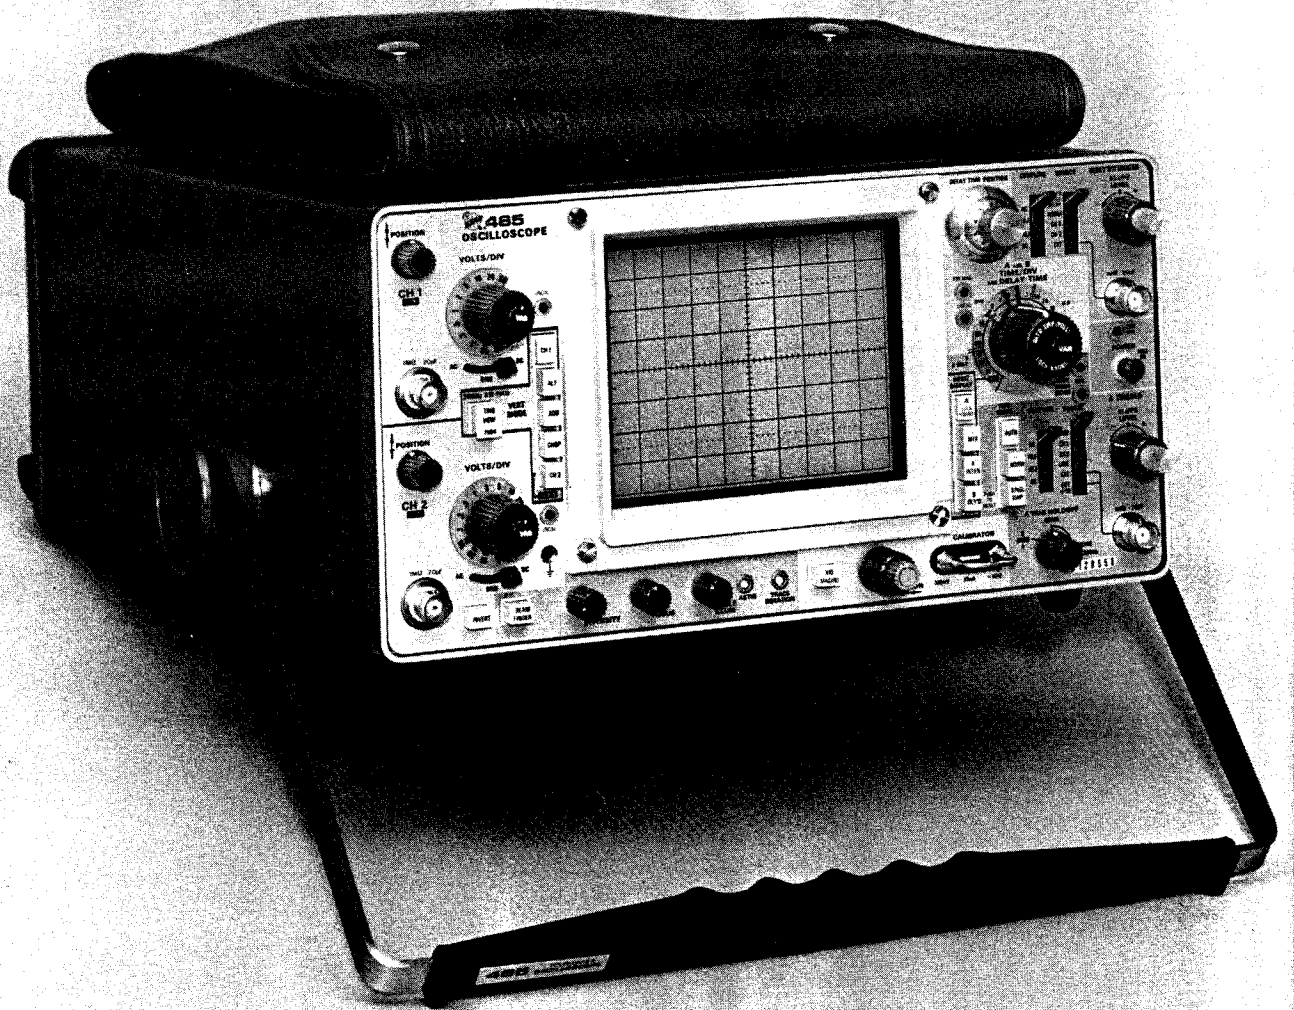


Fig. 1-1. 465 Oscilloscope.

# 465 SPECIFICATIONS

## Introduction

The 465 Oscilloscope is a wide-band, portable oscilloscope designed to operate in a wide range of environmental conditions. The instrument is light in weight and compact of design for ease of transportation, yet capable of performance necessary for accurate high-frequency measurements. The dual-channel, DC-to-100 megahertz vertical deflection system provides calibrated deflection factors from 5 millivolts to 5 volts/division. The bandwidth limiting switch reduces interference from signals above about 20 megahertz for viewing low-frequency, low-level signals.

The trigger circuits provide stable sweep triggering to beyond the bandwidth of the vertical deflection system. Separate controls are provided to select the desired mode of triggering for the A and B sweeps. The A sweep can be operated in one of three modes: automatic triggering, normal triggering, or single sweep. A variable trigger holdoff control provides the ability for A sweep to trigger stably on aperiodic signals or complex digital words. The horizontal deflection system has calibrated sweep rates from 0.5

second to 0.05 microsecond/division. A X10 magnifier increases each sweep rate by a factor of 10 to provide a maximum sweep rate of 5 nanoseconds/division in the 0.05  $\mu$ s position. The delayed and mixed sweep features allow the start of the B sweep to be delayed a selected amount from the start of A sweep to provide accurate relative-time measurements. Calibrated X-Y measurements can be made with Channel 2 providing the vertical deflection and Channel 1 providing the horizontal deflection (TIME/DIV switch fully counterclockwise and VERT MODE switch to CH 2). The regulated DC power supplies ensure that instrument performance is not affected by variations in line voltage and frequency. Maximum power consumption of the instrument is approximately 75 watts.

The following instrument specifications apply over an ambient temperature range of  $-15^{\circ}\text{C}$  to  $+55^{\circ}\text{C}$  unless otherwise specified. Warm-up time for specified accuracies is 20 minutes. The calibration procedure given in section 5, if performed completely, will allow an instrument to meet the electrical characteristics listed below.

---

## VERTICAL DEFLECTION SYSTEM

### Deflection Factor

Calibrated range is from 5 millivolts to 5 volts per division in 10 steps in a 1-2-5 sequence. Accuracy is within 3%. Uncalibrated VAR control provides deflection factors continuously variable between the calibrated settings, and extends deflection factor to at least 12.5 volts per division in the 5 volts/div position.

### Frequency Response

Bandwidth in both Channel 1 and Channel 2 is DC to at least 100 megahertz. Risetime is 3.5 nanoseconds or less. The AC-coupled lower  $-3$  dB point is 10 hertz or less (1 hertz or less when using a 10X probe). Vertical system bandwidth with the BW LIMIT pushbutton pulled is approximately 20 megahertz.

### Chopped Mode Repetition Rate

Approximately 250 kilohertz.

### Input Resistance And Capacitance

One megohm within 2% paralleled by approximately 20 picofarads.

### Maximum Input Voltage

DC coupled: 250 V (DC + Peak AC) or 500 V P-P AC at 1 kHz or less.

AC coupled: 500 V (DC + Peak AC) or 500 V P-P AC at 1 kHz or less.

### Cascaded Operation (CH 1 VERT SIGNAL OUT Connected to CH 2 OR Y)

Bandwidth is DC to at least 50 MHz with a sensitivity of at least 1 mV/division.

## TRIGGERING

### Sensitivity

DC Coupled: 0.3 division internal or 50 millivolts external from DC to 25 megahertz, increasing to 1.5 divisions internal or 150 millivolts external at 100 megahertz.

AC Coupled: 0.3 division internal or 50 millivolts external from 60 hertz to 25 megahertz, increasing to 1.5 divisions internal or 150 millivolts external at 100 megahertz. Attenuates all signals below about 60 hertz.

## Specifications—465

LF REJ Coupled: 0.5 division internal or 100 millivolts external from 50 kilohertz to 25 megahertz, increasing to 1.5 divisions internal or 300 millivolts external at 100 megahertz. Blocks DC and attenuates all signals below about 50 kilohertz.

HF REJ Coupled: 0.5 division internal or 100 millivolts external from 60 hertz to 50 kilohertz. Blocks DC and attenuates all signals below about 60 hertz and above about 50 kilohertz.

### Trigger Jitter

0.5 nanosecond or less at 5 nanoseconds/division with 100 megahertz applied (X10 MAG on).

### External Trigger Input

Maximum input voltage is 250 V DC + peak AC or 250 V P-P AC (1 kilohertz or less). Input resistance is 1 megohm within 10%.

### LEVEL Control Range

EXT: At least + and - 2 volts, 4 volts peak to peak.

EXT ÷10: At least + and - 20 volts, 40 volts peak to peak.

## HORIZONTAL DEFLECTION SYSTEM

### Calibrated Sweep Range

A Sweep: from 0.5 second/division to 0.05 microsecond/division in 22 steps in a 1-2-5 sequence. X10 MAG extends maximum sweep rate to 5 nanoseconds/division.

B Sweep: from 50 milliseconds/division to 0.05 microsecond/division in 19 steps in a 1-2-5 sequence. X10 MAG extends maximum sweep rate to 5 nanoseconds/division.

### Calibrated Sweep Accuracy

Unmagnified sweep accuracy is  $\pm 2\%$  from  $+20^{\circ}\text{C}$  to  $+30^{\circ}\text{C}$  ( $+68^{\circ}\text{F}$  to  $+86^{\circ}\text{F}$ ) and  $\pm 3\%$  from  $-15^{\circ}\text{C}$  to  $+20^{\circ}\text{C}$  and  $+30^{\circ}\text{C}$  to  $+55^{\circ}\text{C}$  ( $+5^{\circ}\text{F}$  to  $+68^{\circ}\text{F}$  and  $+86^{\circ}\text{F}$  to  $+131^{\circ}\text{F}$ ). For the same temperature ranges, magnified sweep accuracy is  $\pm 3\%$  and  $\pm 4\%$  respectively. Exclude the first and last 50 ns of the 5 ns, 10 ns, and 20 ns magnified sweep rates. Accuracy specifications apply over full ten divisions unless otherwise specified.

Sweep accuracy, over any two or less division portion of the sweep, is  $\pm 5\%$ . Exclude the first and last magnified divisions of the 5 ns and 10 ns/div magnified sweep rates. Also exclude the first and last 50 ns of the 5, 10, and 20 ns/div magnified sweep rates.

Mixed sweep accuracy is 2% plus the measured A sweep error when viewing the A sweep portion only. The B sweep portion retains its normal accuracy.

### A Time/Division Variable Range

Provides continuously variable (uncalibrated) sweep rates between the calibrated settings of the A TIME/DIV switch. Extends the slowest A sweep rate to at least 1.25 seconds/division.

### A Trigger Holdoff

Increases A sweep holdoff time by at least a factor of 10.

### Delay Time And Differential Time Measurement Accuracy

	$+15^{\circ}\text{C}$ to $+35^{\circ}\text{C}$ ( $+60^{\circ}\text{F}$ to $+95^{\circ}\text{F}$ )	$-15^{\circ}\text{C}$ to $+55^{\circ}\text{C}$ ( $+5^{\circ}\text{F}$ to $+131^{\circ}\text{F}$ )
Over One Or More Major Dial Division	$\pm 1\%$	$\pm 2.5\%$
Over Less Than One Major Dial Division	$\pm 0.01$ Major Dial Division	$\pm 0.03$ Major Dial Division

### Delay Time Jitter

Within 0.002% (less than one part in 50,000) of the maximum available delay time when operating on power line frequencies other than 50 Hz.

Within 0.005% (less than one part in 20,000) of the maximum available delay time when operating on 50 Hz power line frequency.

Maximum available delay time is ten times the setting of the A TIME/DIV switch.

### Calibrated Delay Time (A VAR set to calibrated position)

Continuous from 5 seconds to 0.2 microsecond.



**X-Y OPERATION****Sensitivity**

Same as vertical deflection system.

X Axis deflection accuracy within 4%.

**Variable Range**

Same as vertical deflection system.

**X-Axis Bandwidth**

DC to at least 4 megahertz.

**Y-Axis Bandwidth**

Same as vertical deflection system.

**Input Resistance**

Same as vertical deflection system.

**Input Capacitance**

Same as vertical deflection system.

**Maximum Usable Input Voltage**

Same as vertical deflection system.

**CALIBRATOR****Output**

An approximate 1 kilohertz frequency 30 milliampere ( $\pm 2\%$ ), 300 millivolt ( $\pm 1\%$ ) square-wave signal.

**Z AXIS INPUT****Sensitivity**

A 5-volt peak to peak signal causes noticeable modulation at normal intensity.

**Usable Frequency Range**

From DC to 50 megahertz.

**SIGNAL OUTPUTS****CH 1 VERT SIGNAL OUT**

Output voltage is at least 50 millivolts/division into a 1 megohm load (at least 25 millivolts/division into a 50 ohm load).

Bandwidth is from DC to at least 50 megahertz into a 50 ohm load.

Output DC level is approximately zero volts.

**A and B +GATE Outputs**

Output voltage is approximately 5.5 volts, positive-going.

**POWER SOURCE****Line Voltages**

110, 115, 120, 220, 230, or 240 VAC (all  $\pm 10\%$ ), depending on the settings of the Line Voltage Selector switch and the Regulating Range Selector assembly, with a line frequency of 48 to 440 hertz. Maximum power consumption is 75 watts at 115 VAC, 60 hertz.

**CATHODE-RAY TUBE****Graticule Area**

Eight by ten centimeters.

**Phosphor**

P31 is the standard phosphor with P11 offered as an option.

**SUPPLEMENTAL INFORMATION****General**

The supplemental information listed here represents limits that, when met, ensure optimum instrument operation. They are, however, not instrument specifications but are intended to be used only as maintenance or operational aids.

**VERTICAL DEFLECTION SYSTEM****Low-Frequency Linearity**

There should be no more than 0.1 division of compression or expansion of a two-division signal at center screen when the signal is positioned to the upper and lower extremes of the CRT graticule area.

**Bandwidth Limiter Bandwidth**

The  $-3$  dB point should be between 15 and 25 megahertz.

### Step Response Aberrations

At 5 V/DIV there should be no more than +4%, -4%, 4% P-P. For all other ranges there should be no more than +3%, -3%, or a total of 3% peak to peak aberration on a positive-going step. Position-effect should not cause total aberrations to be more than +5%, -5%, or a total of 5% peak to peak.

### Common-Mode Rejection Ratio

At least 10:1 at 20 megahertz for common mode signals of 6 divisions or less with vertical gain adjusted for best CMRR at 50 kilohertz.

### Step Attenuator Balance

Adjustable to 0.2 division or less of trace shift when switching between adjacent deflection factors.

### Trace Shift As Variable Is Rotated

Adjustable to one division or less.

### INVERT Trace Shift

Two divisions or less when switching from normal to inverted.

### Input Gate Current

0.5 nanoampere or less (0.1 division of deflection at 5 mV/div) from +20°C to +30°C. Four nanoamperes or less (0.8 division of deflection at 5 mV/div) from -15°C to +55°C.

### Channel Isolation

At least 100:1 at 25 megahertz.

### Position Control Range

Twelve divisions up and twelve divisions down from graticule center.

## TRIGGERING

### External Trigger Input Capacitance

Twenty picofarads within 30%.

## HORIZONTAL DEFLECTION SYSTEM

### A Sweep Length

10.5 to 11.5 divisions.

### Magnifier Registration

There should be 0.2 division or less difference at graticule center when switching from MAG on to MAG off.

### Position Control Range

Should be able to position the start of the sweep to the right of graticule center, and the end of the sweep to the left of graticule center.

### Phase Difference Between X And Y Axes Amplifiers

Typically 3° or less from DC to 50 kilohertz.

## CALIBRATOR

### Repetition Rate

Repetition rate accuracy is typically within 25%.

### Output Resistance

Approximately 9.4 ohms.

## EXTERNAL Z AXIS INPUT

### Maximum Input Voltage

Voltages applied to the EXT Z AXIS INPUT connector should be limited to less than 100 volts DC plus peak AC or 100 volts peak to peak AC at 1 kilohertz or less.

## OUTPUT SIGNALS

### Output Resistance

Output resistance of the CH 1 VERT SIG OUT connector is  $\approx 50 \Omega$ .

Output resistance of +A and +B GATE outputs is  $\approx 500 \Omega$ .

## CATHODE-RAY TUBE

### Resolution

Typically at least 15 lines per division horizontally and vertically.

### Geometry

0.1 division or less of tilt or bowing.

### Raster Distortion

0.1 division or less.

### Nominal Accelerating Potential

Approximately 18,500 volts.