

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

General Description

The MAX8900_ is a high-frequency, switch-mode charger for a 1-cell lithium ion (Li+) or lithium polymer (Li-Poly) battery. It delivers up to 1.2A of current to the battery from 3.4V to 6.3V (MAX8900A/MAX8900C) or 3.4V to 8.7V (MAX8900B). The 3.25MHz switch-mode charger is ideally suited to small portable devices such as headsets and ultra-portable media players because it minimizes component size and heat.

Several features make the MAX8900_ perfect for high-reliability systems. The MAX8900_ is protected against input voltages as high as +22V and as low as -22V. Battery protection features include low voltage prequalification, charge fault timer, die temperature monitoring, and battery temperature monitoring. The battery temperature monitoring adjusts the charge current and termination voltage as described in the JEITA* specification for safe use of secondary lithium-ion batteries.

Charge parameters are easily adjustable with external components. An external resistance adjusts the charge current from 50mA to 1200mA. Another external resistance adjusts the prequalification and done current thresholds from 10mA to 200mA. The done current threshold is very accurate achieving $\pm 1mA$ at the 10mA level. The charge timer is adjustable with an external capacitor. The MAX8900_ is available in a 0.4mm pitch, 2.44mm x 2.67mm x 0.64mm WLP package.

Applications

| | |
|----------------------------|-----------------|
| USB Charging | Digital Cameras |
| Headsets and Media Players | GPS, PND |
| Smartphones | eBook |

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE | OPTIONS |
|---------------|----------------|-------------|--|
| MAX8900AEWV+T | -40°C to +85°C | 30 WLP | VOVLO = 6.5V T1 = 0°C 2-pin status indicators VPQUTH = 2.8V |
| MAX8900BEWV+T | -40°C to +85°C | 30 WLP | VOVLO = 9.0V T1 = -15°C 3-pin status indicators VPQUTH = 2.8V |


+Denotes a lead(Pb)-free/RoHS-compliant package.
T = Tape and reel.

Ordering Information continued at end of data sheet.

Features

- ◆ 3.25MHz Switching Li+/Li-Poly Battery Charger
- ◆ JEITA Battery Temperature Monitor Adjusts Charge Current and Termination Voltage
- ◆ 4.2V $\pm 0.5\%$ Battery Regulation Voltage (Alternate 4.1V Target Available on Request)
- ◆ Adjustable Done Current Threshold
Adjustable from 10mA to 200mA
 $\pm 1mA$ Accuracy at 10mA
- ◆ High-Efficiency and Low Heat
- ◆ Uses a 2.0mm x 1.6mm Inductor
- ◆ Positive and Negative Input Voltage Protection ($\pm 22V$)
- ◆ Up to +20V Operating Range (Alternate OVLO Ranges Available on Request)
- ◆ Supports No-Battery Operation
- ◆ Fault Timer
- ◆ Charge Status Outputs
- ◆ 2.44mm x 2.67mm x 0.64mm Package

Simplified Applications Circuit

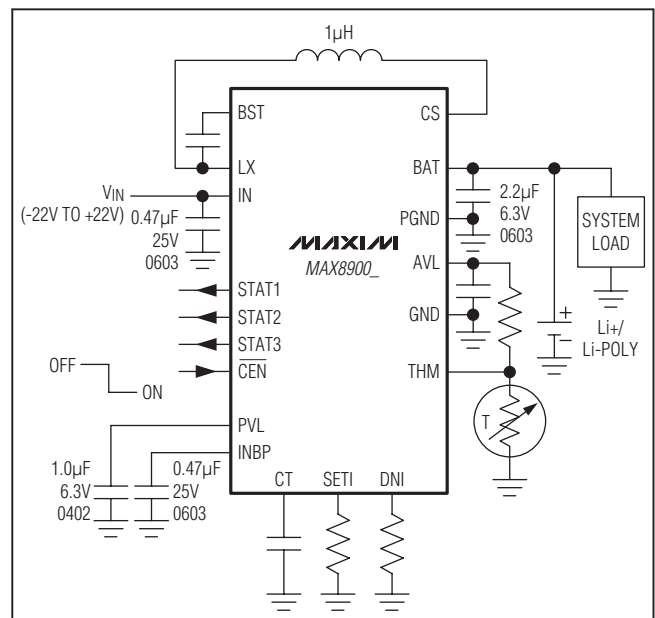

*JEITA (Japan Electronics and Information Technology Industries Association) standard, "A Guide to the Safe Use of Secondary Lithium Ion Batteries in Notebook-type Personal Computers" April 20, 2007.

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

TABLE OF CONTENTS

| | |
|---|----|
| Absolute Maximum Ratings | 4 |
| Electrical Characteristics | 4 |
| Typical Operating Characteristics | 8 |
| Pin Configuration | 13 |
| Pin Description | 13 |
| Detailed Description | 17 |
| Control Scheme | 17 |
| Soft-Start | 17 |
| Setting the Fast-Charge Current (SETI) | 17 |
| Setting the Prequalification Current and Done Threshold (DNI) | 18 |
| Charge Enable Input (\overline{CEN}) | 18 |
| Charger States | 19 |
| Charger Disabled State | 22 |
| Dead-Battery State | 22 |
| Dead Battery + Prequalification State | 22 |
| Prequalification State | 22 |
| Fast-Charge Constant Current State | 22 |
| Fast-Charge Constant Voltage State | 22 |
| Top-Off State | 22 |
| Done State | 23 |
| Timer Fault State | 23 |
| Battery Hot/Cold State | 23 |
| V_{IN} Too High State | 23 |
| Charge Timer (CT) | 23 |
| Thermal Management | 23 |
| Thermistor Monitor (THM) | 24 |
| Thermal Foldback | 26 |
| Thermal Shutdown | 26 |
| PVL and AVL Regulator | 27 |
| Charge Status Outputs (3 Pin) | 27 |
| Charge Status Outputs (2 Pin + > T4) | 27 |
| Inductor Selection | 28 |
| BAT Capacitor | 29 |
| INBP Capacitor | 29 |
| Other Capacitors | 29 |
| Applications Information | 30 |
| Dynamic Charge Current Programming | 30 |
| No-Battery Operation | 30 |

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

TABLE OF CONTENTS (continued)

| | |
|--|----|
| Charge-Source Issues | 30 |
| Charge-Source Impedance | 30 |
| Inductive Kick | 30 |
| Overvoltage and Reverse Input Voltage Protection | 31 |
| PCB Layout | 31 |
| Chip Information | 33 |
| Package Information | 34 |
| Revision History | 35 |

LIST OF FIGURES

| | |
|--|----|
| Figure 1. Applications Circuit: Single SETI Resistor, Status Indicators Connected to LEDs | 15 |
| Figure 2. Applications Circuit: Multiple Charge Rates Managed by μP to Be USB Compliant, Status Indicators Connected to a μP | 15 |
| Figure 3. Functional Diagram | 16 |
| Figure 4. Fast-Charge Current vs. R_{SETI} (www.maxim-ic.com/tools/other/software/MAX8900-RSETI.XLS) | 18 |
| Figure 5. Prequalification Current and Done Threshold vs. R_{DNI} (www.maxim-ic.com/tools/other/software/MAX8900-DNI.XLS) | 18 |
| Figure 6. Li+/Li-Poly Charge Profile | 19 |
| Figure 7. Charger State Diagram (3-Pin Status) | 20 |
| Figure 8. Charger State Diagram (2-Pin Status) | 21 |
| Figure 9. Charge Times vs. C_{CT} | 23 |
| Figure 10. JEITA Battery Safety Regions | 25 |
| Figure 11. Thermistor Monitor Detail | 26 |
| Figure 12. Charge Current vs. Junction Temperature | 26 |
| Figure 13. Calculated Fast-Charge Current vs. Dropout Voltage | 29 |
| Figure 14. Power PCB Layout Example | 32 |
| Figure 15. Recommended Land Pattern | 33 |
| Figure 16. Bump Cross Section and Copper Pillar Detail | 33 |

LIST OF TABLES

| | |
|--|----|
| Table 1. 2.44mm x 2.67mm x 0.64mm, 0.4mm Pitch WLP Thermal Characteristics | 24 |
| Table 2. Trip Temperatures for Different Thermistors | 25 |
| Table 3. 3-Pin Status Output Truth Table | 27 |
| Table 4. 2-Pin Status Output Truth Table | 27 |
| Table 5. Recommended Inductor Selection | 28 |
| Table 6. Recommended Inductor | 28 |

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

ABSOLUTE MAXIMUM RATINGS

| | | | |
|----------------------------------|------------------------|--|-----------------|
| IN to PGND..... | -22V to +22V | PGND to GND..... | -0.3V to +0.3V |
| INBP to PGND..... | (VBAT - 0.3V) to +22V | IN Continuous Current..... | 2.4ARMS |
| IN to INBP..... | -30V to +1.2V | LX Continuous Current (Note 1)..... | 1.6ARMS |
| STAT1, STAT2 to GND..... | -0.3V to +30V | CS Continuous Current..... | 1.3ARMS |
| BST to PGND..... | -0.3V to +36V | BAT Continuous Current..... | 1.3ARMS |
| BST to LX..... | -0.3V to +6.0V | Continuous Power Dissipation (TA = +70°C) | |
| BST to PVL..... | -0.3V to +30V | 30-Bump WLP (derate 20.4mW/°C above +70°C).... | 1616mW |
| PVL, BAT, CS to PGND..... | -0.3V to +6.0V | Operating Temperature Range..... | -40°C to +85°C |
| AVL, STAT3, CEN, THM to GND..... | -0.3V to +6.0V | Junction Temperature..... | -40°C to +150°C |
| PVL to AVL..... | -0.3V to +0.3V | Storage Temperature Range..... | -65°C to +150°C |
| CT to GND..... | -0.3V to (AVL + 0.3V) | Soldering Temperature (reflow)..... | +260°C |
| SETI, DNI to GND..... | -0.3V to (VBAT + 0.3V) | | |

Note 1: LX has an internal clamp diode to PGND and INBP. Applications that forward bias these diodes should take care not to exceed the power dissipation limits of the device.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(VIN = 6V, VBAT = 4V, RSETI = 2.87k Ω , RDNI = 3.57k Ω , VTHM = VAVL/2, circuit of Figure 1, TA = -40°C to +85°C, unless otherwise noted. Typical values are at TA = +25°C.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS | |
|-----------------------------------|---------|---|--|-------|------|----------|---|
| GENERAL | | | | | | | |
| IN Input Voltage Range (Note 3) | VIN | Withstand voltage | -20 | | +20 | V | |
| | | Operating voltage | MAX8900B | 3.4 | | 8.7 | V |
| MAX8900A/ MAX8900C | 3.4 | | | 6.3 | | | |
| IN Undervoltage Threshold | VUVLO | VIN falling, 400mV hysteresis (Note 4) | 3.1 | 3.2 | 3.3 | V | |
| IN to BAT Shutdown Threshold | VIN2BAT | When charging stops, VIN falling, 200mV hysteresis | 0 | 15 | 30 | mV | |
| IN Overvoltage Threshold (Note 3) | VOVLO | VIN rising | 0.40V hysteresis (MAX8900B) | 8.80 | 9.00 | 9.20 | V |
| | | | 0.26V hysteresis (MAX8900A/ MAX8900C) | 6.35 | 6.50 | 6.65 | |
| IN Supply Current | IIN | Charger enabled, no switching | | 1 | 2 | mA | |
| | | Charger enabled, f = 3.25MHz, VIN = 6V | | 20 | | | |
| | | Charger disabled, CEN = high | | 0.04 | 0.2 | | |
| LX High-Side Resistance | RHS | | | 0.10 | | Ω | |
| LX Low-Side Resistance | RLS | | | 0.15 | | Ω | |
| LX Leakage Current | | LX = GND or IN | TA = +25°C | 0.01 | 10 | μ A | |
| | | | TA = +85°C | 0.1 | | | |
| BST Leakage Current | | VBST - VLX = 6V | TA = +25°C | 0.01 | 10 | μ A | |
| | | | TA = +85°C | 0.1 | | | |
| Current-Sense Resistor | RSNS | VBAT = 2.6V | | 0.045 | | Ω | |
| IN to BAT Dropout Resistance | RIN2BAT | Calculation estimates a 40m Ω inductor resistance (RL), RIN2BAT = RIN2INBP + RHS + RL + RSNS | | 0.3 | | Ω | |
| Switching Frequency | fsw | VBAT = 2.6V | | 3.25 | | MHz | |

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

ELECTRICAL CHARACTERISTICS (continued)

(VIN = 6V, VBAT = 4V, RSETI = 2.87kΩ, RDNI = 3.57kΩ, VTHM = VAVL/2, circuit of Figure 1, TA = -40°C to +85°C, unless otherwise noted. Typical values are at TA = +25°C.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--|---------|---|--|-------|-------|-------|-------|
| Minimum On-Time | tON-MIN | | | | 90 | | ns |
| Maximum On-Time | tON-MAX | | | | 9 | | μs |
| Minimum Off-Time | tOFF | | | | 75 | | ns |
| BAT Regulation Voltage (Note 3) | VBATREG | IBAT = 0mA, MAX8900A/MAX8900B/MAX8900C (Figure 10) | TA = +25°C, VTHM between T1 and T3 | 4.179 | 4.200 | 4.221 | V |
| | | | TA = -40°C to +85°C, VTHM between T1 and T3 | 4.158 | 4.200 | 4.242 | |
| | | | TA = +25°C, VTHM between T3 and T4 (Note 5) | 4.055 | 4.075 | 4.095 | |
| | | | TA = -40°C to +85°C, VTHM between T3 and T4 (Note 5) | 4.034 | 4.075 | 4.100 | |
| Charger Restart Threshold (Note 6) | VRSTRT | VTHM between T1 and T3 | | -70 | -100 | -125 | mV |
| | | VTHM between T3 and T4 | | | -75 | | |
| BAT Prequalification Lower Threshold (Figure 6) | VPQLTH | VBAT rising, 180mV hysteresis | | | 2.1 | | V |
| BAT Prequalification Upper Threshold (Figure 6) (Note 3) | VPQUTH | VBAT rising, 180mV typical hysteresis | MAX8900A/MAX8900B | 2.7 | 2.8 | 2.9 | V |
| | | | MAX8900C | 2.9 | 3.0 | 3.1 | |
| Fast-Charge Current | IFC | VTHM between T2 and T4 (Figure 10) | RSETI = 2.87kΩ | 1166 | 1190 | 1214 | mA |
| | | | RSETI = 6.81kΩ | 490 | 500 | 510 | |
| | | | RSETI = 34.0kΩ | 99 | 101 | 103 | |
| | | VTHM between T1 and T2 (Figure 10); the fast-charge current is reduced to 50% the value programmed by RSETI | | | 50 | | % |
| Fast-Charge Current Set Range | | (Figure 5) | Minimum | | 50 | | mA |
| | | | Maximum | | 1200 | | |
| Fast-Charge Setting Resistor Range | RSETI | (Figure 5) | Minimum | | 2.87 | | kΩ |
| | | | Maximum | | 68.1 | | |
| Done Current | IDN | VTHM between T2 and T4 (Figure 10) | RDNI = 3.83kΩ (Note 5) | 93 | 99 | 105 | mA |
| | | | RDNI = 7.68kΩ (Note 5) | 47 | 50 | 53 | |
| | | | RDNI = 38.3kΩ | 9.5 | 10.5 | 11.5 | |
| | | VTHM between T1 and T2 (Figure 10); the done current threshold is reduced to 50% the value programmed by RDNI | | | 50 | | % |
| Prequalification Current | IPQ | VTHM between T2 and T4 (Figure 10), VBAT = 2.6V | RDNI = 3.83kΩ (Note 5) | 95 | 105 | 115 | mA |
| | | | RDNI = 7.68kΩ (Note 5) | 49 | 54 | 59 | |
| | | | RDNI = 38.3kΩ (Note 5) | 10 | 11.5 | 13 | |
| | | VTHM between T1 and T2 (Figure 10); the prequalification current is reduced to 50% the value programmed by RDNI | | | 50 | | % |

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

ELECTRICAL CHARACTERISTICS (continued)

($V_{IN} = 6V$, $V_{BAT} = 4V$, $R_{SET1} = 2.87k\Omega$, $R_{DNI} = 3.57k\Omega$, $V_{THM} = V_{AVL}/2$, circuit of Figure 1, $T_A = -40^\circ C$ to $+85^\circ C$, unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--|-----------------|---|----------------------------------|-------|-------|-------|------------|
| Done and Prequalification Current Set Range | | (Figure 5) | Minimum | | 9.8 | | mA |
| | | | Maximum | | 200 | | |
| Done and Prequalification Setting Resistor Range | RDNI | (Figure 5) | Minimum | | 1.91 | | k Ω |
| | | | Maximum | | 39.2 | | |
| Dead-Battery Charge Current | IDBAT | $0V \leq V_{BAT} \leq V_{DBAT}$ | | | 45 | | mA |
| Dead-Battery Voltage Threshold (Figure 6) | VDBAT | | | | 2.5 | | V |
| BAT Leakage Current | | $V_{IN} = 0V$, $V_{BAT} = 4.2V$, includes LX leakage current through the inductor | $T_A = +25^\circ C$ | | 0.02 | 1 | μA |
| | | | $T_A = +85^\circ C$ | | 0.05 | | |
| Charger Soft-Start Time (Note 3) | tSS | | | | 1.5 | | ms |
| CHARGE TIMER | | | | | | | |
| Prequalification/Dead-Battery Time | tpQ | CCT = 0.1 μF | | | 30 | | min |
| Fast-Charge Time | tFC | CCT = 0.1 μF | | | 180 | | min |
| Top-Off Time | tTO | | | | 16 | | s |
| Timer Accuracy | | | | -15 | | +15 | % |
| THERMISTOR MONITOR | | | | | | | |
| THM Hot Shutoff Threshold (60 $^\circ C$) | T4 | V_{THM}/AVL falling, 1% hysteresis (thermistor temperature rising) | | 21.24 | 22.54 | 23.84 | %AVL |
| THM Hot Voltage Foldback Threshold (45 $^\circ C$) | T3 | V_{THM}/AVL falling, 1% hysteresis (thermistor temperature rising) | | 32.68 | 34.68 | 36.68 | %AVL |
| THM Cold Current Foldback Threshold (15 $^\circ C$) | T2 | V_{THM}/AVL rising, 1% hysteresis (thermistor temperature falling) | | 57.00 | 60.00 | 63.00 | %AVL |
| THM Cold Shutoff Threshold (-15 $^\circ C/0^\circ C$) | T1 | V_{THM}/AVL rising, 1% hysteresis (thermistor temperature falling) | 0 $^\circ C$, MAX8900A/MAX8900C | 71.06 | 74.56 | 78.06 | %AVL |
| | | | -15 $^\circ C$, MAX8900B | 81.43 | 86.07 | 90.98 | |
| THM Input Leakage | | THM = GND or AVL | $T_A = +25^\circ C$ | -0.2 | 0.001 | +0.2 | μA |
| | | | $T_A = +85^\circ C$ | | 0.001 | | |
| CHARGE ENABLE INPUT (\overline{CEN}) | | | | | | | |
| \overline{CEN} Input Voltage Low | V _{IL} | | | | | 0.6 | V |
| \overline{CEN} Input Voltage High | V _{IH} | | | 1.4 | | | V |
| \overline{CEN} Internal Pulldown Resistance | RCEN | | | 100 | 200 | 400 | k Ω |

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

ELECTRICAL CHARACTERISTICS (continued)

(VIN = 6V, VBAT = 4V, RSET1 = 2.87kΩ, RDNI = 3.57kΩ, VTHM = VAVL/2, circuit of Figure 1, TA = -40°C to +85°C, unless otherwise noted. Typical values are at TA = +25°C.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--------|---|------------|-------|------|-------|
| STATUS OUTPUTS (STAT1, STAT2, STAT3) | | | | | | |
| STAT1 and STAT2 Output Voltage Low | | ISINK = 1mA | | 0.025 | 0.05 | V |
| | | ISINK = 15mA | | 0.38 | | |
| STAT1 and STAT2 Output High Leakage | | VSTAT_ = 28V | TA = +25°C | 0.001 | 1 | μA |
| | | | TA = +85°C | 0.01 | | |
| STAT3 Output Voltage Low | | ISINK = 1mA | | 0.01 | | V |
| | | ISINK = 15mA | | 0.15 | 0.25 | |
| STAT3 Output High Leakage | | VSTAT3 = 5.5V | TA = +25°C | 0.001 | 1 | μA |
| | | | TA = +85°C | 0.01 | | |
| PVL AND AVL | | | | | | |
| PVL and AVL Output Voltage | | 0 to 30mA internal load, VIN = 6V, TA = 0°C to +85°C | 4.6 | 5.0 | 5.1 | V |
| | | 0 to 23mA internal load, VIN = 6V, TA = -40°C to +85°C | | | | |
| THERMAL | | | | | | |
| Thermal Regulation Temperature | TREG | Junction temperature when charge current is reduced | | 95 | | °C |
| Thermal Regulation Gain | TTREG | The charge current is decreased 6.7% of the fast-charge current setting for every degree that the junction temperature exceeds the thermal regulation temperature | | 6.7 | | %/°C |
| Thermal-Shutdown Temperature | TSHDN | Junction temperature rising, 15°C hysteresis | | +155 | | °C |

Note 2: Parameters are production tested at TA = +25°C. Limits over the operating temperature range are guaranteed through correlation using statistical quality control (SQC) methods.

Note 3: Contact factory for alternative values.

Note 4: VIN must be greater than VUVLO-RISING for the part to operate when CEN is pulled low. For example, if CEN is low and the MAX8900_ is operating with VUVLO-FALLING < VIN < VUVLO-RISING, then toggling CEN results in a nonoperating condition.










Note 5: Guaranteed by design, not production tested.

Note 6: When the charger is in its DONE state, it restarts when the battery voltage falls to the charger restart threshold. The battery voltage that causes a restart (VBAT-RSTRT) is VBAT-RSTRT = 4.2V - VRSTRT. For example, with the MAX8900A, VBAT-RSTRT = 4.2V - 100mV = 4.1V.

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

Typical Operating Characteristics

(Circuit of Figure 1, $V_{IN} = 6V$, $V_{BAT} = 3.6V$, $T_A = +25^\circ C$, unless otherwise noted.)

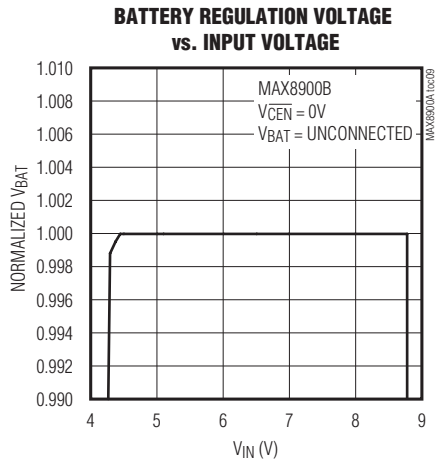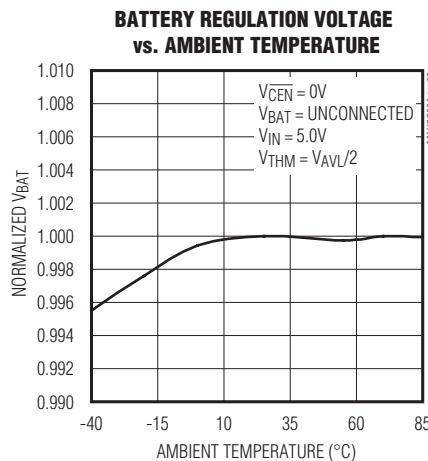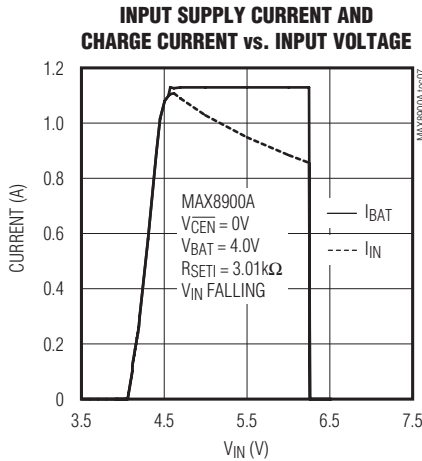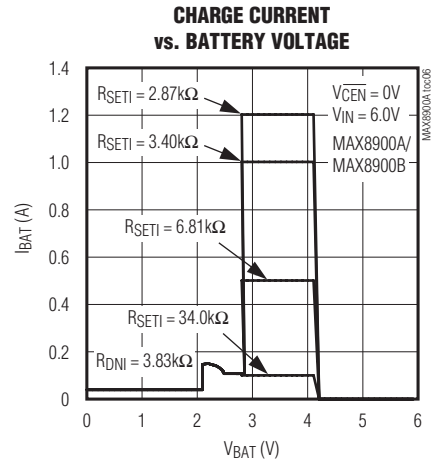
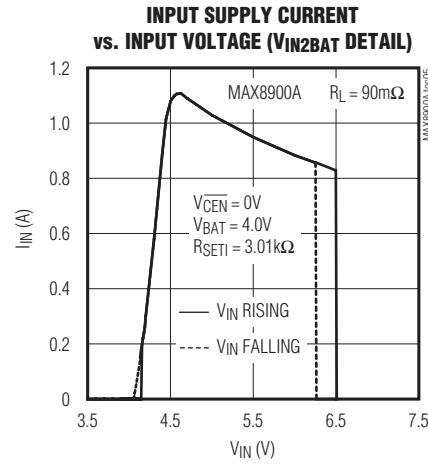
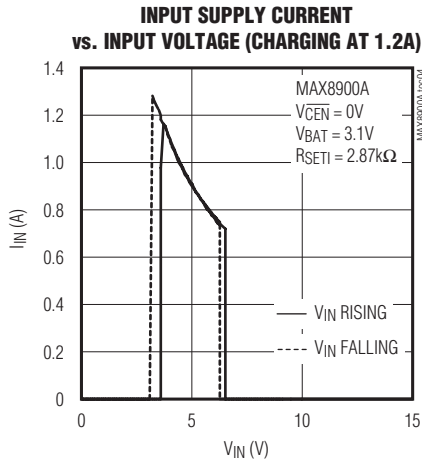
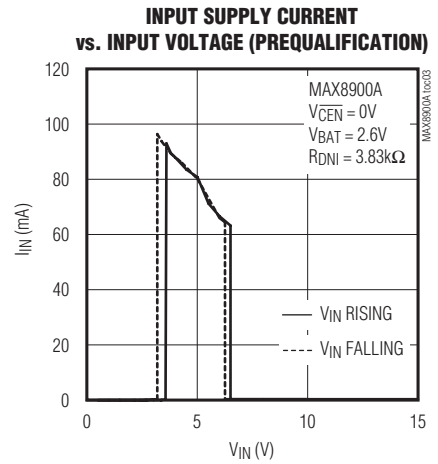
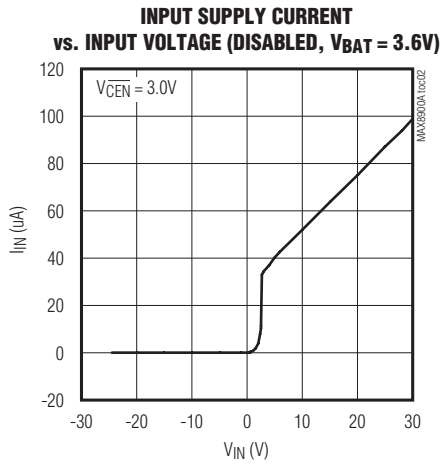
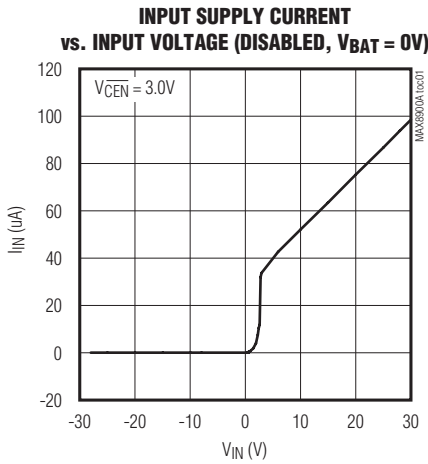


1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

Typical Operating Characteristics (continued)

(Circuit of Figure 1, $V_{IN} = 6V$, $V_{BAT} = 3.6V$, $T_A = +25^\circ C$, unless otherwise noted.)








MAX8900A/MAX8900B/MAX8900C

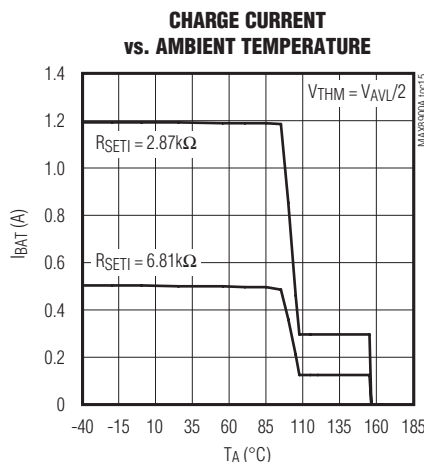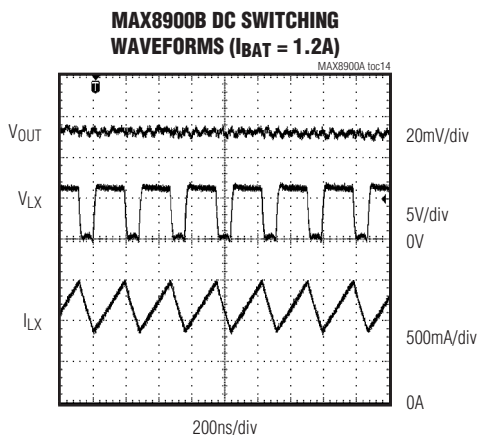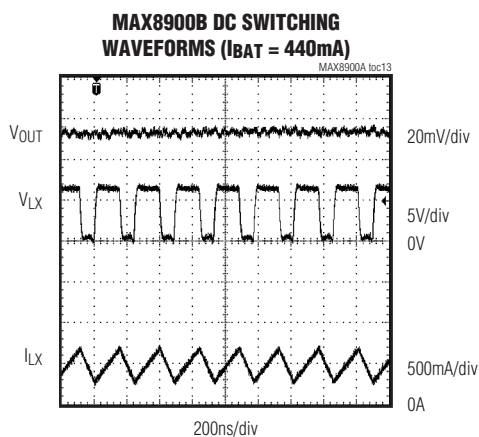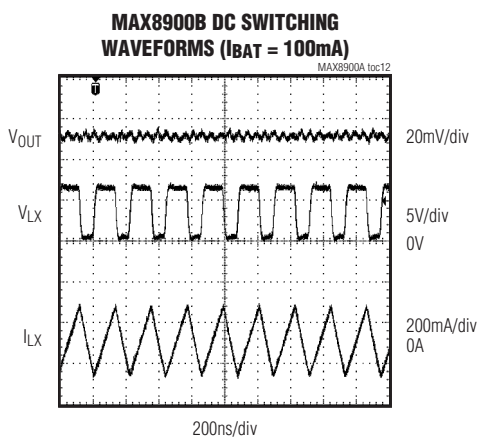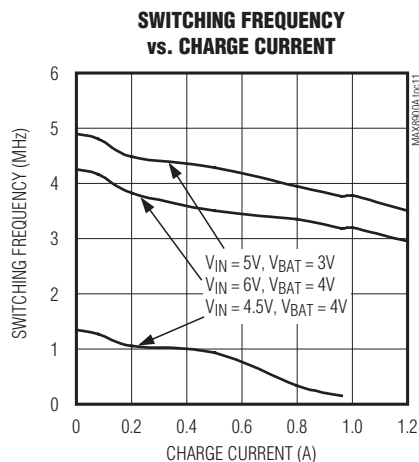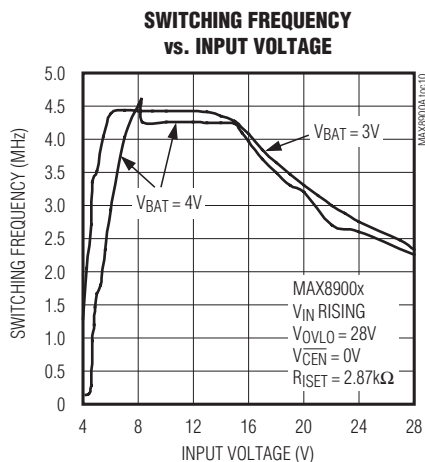

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

Typical Operating Characteristics (continued)

(Circuit of Figure 1, $V_{IN} = 6V$, $V_{BAT} = 3.6V$, $T_A = +25^\circ C$, unless otherwise noted.)

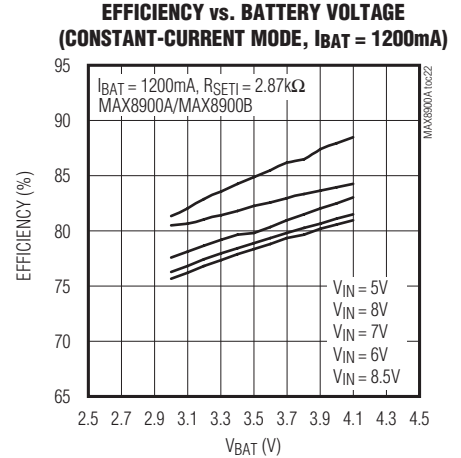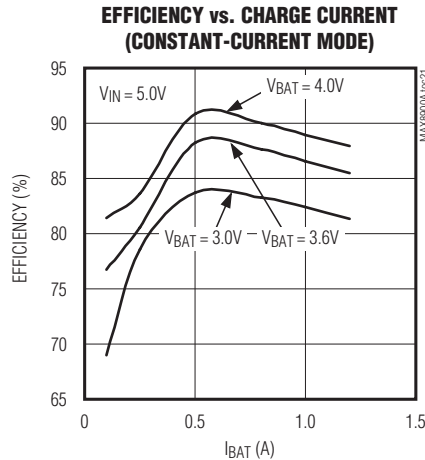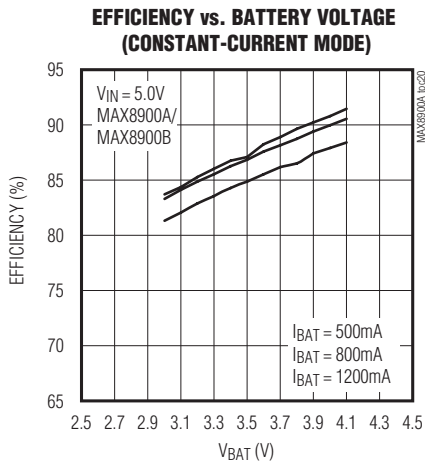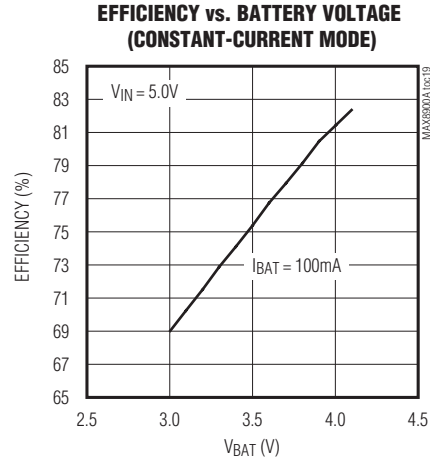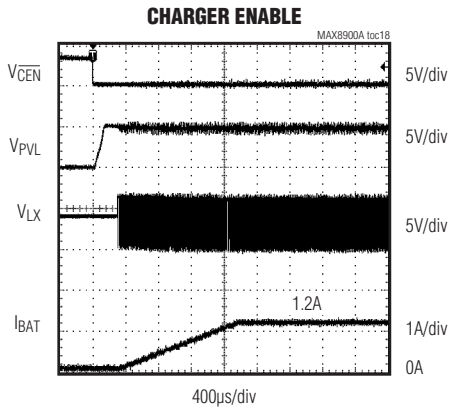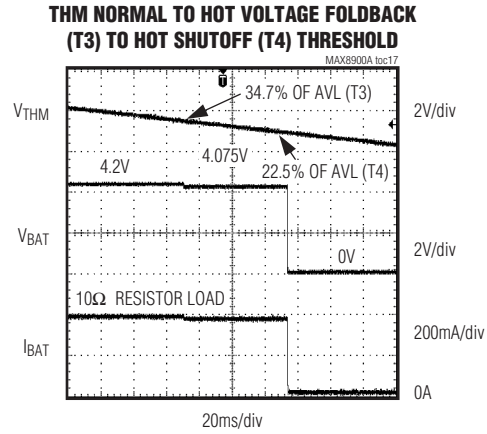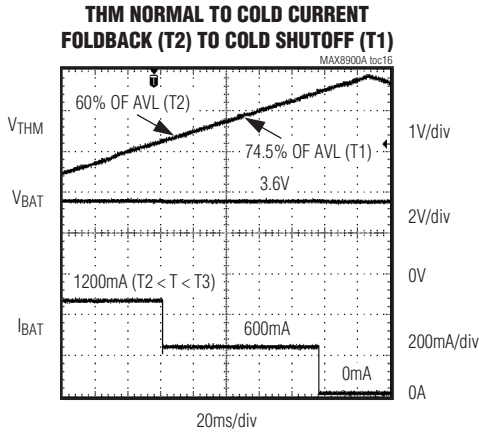


1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring


Typical Operating Characteristics (continued)

(Circuit of Figure 1, $V_{IN} = 6V$, $V_{BAT} = 3.6V$, $T_A = +25^\circ C$, unless otherwise noted.)


EFFICIENCY vs. INPUT VOLTAGE (CONSTANT-CURRENT MODE)

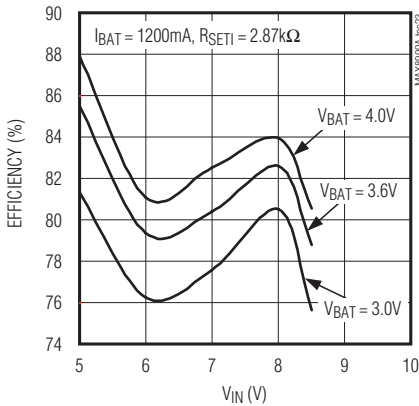


EFFICIENCY vs. CHARGE CURRENT (CONSTANT-VOLTAGE MODE)

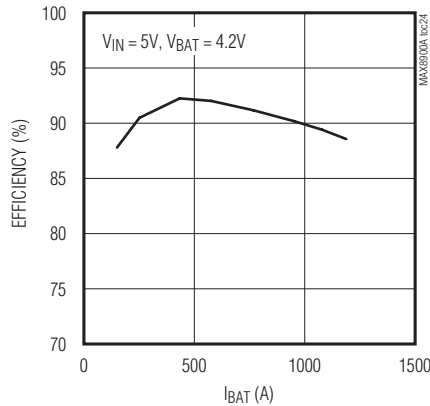


BATTERY + LX LEAKAGE CURRENT vs. INPUT VOLTAGE

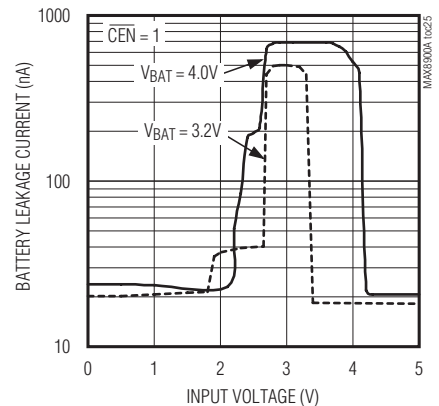


BATTERY + LX LEAKAGE CURRENT vs. BATTERY VOLTAGE

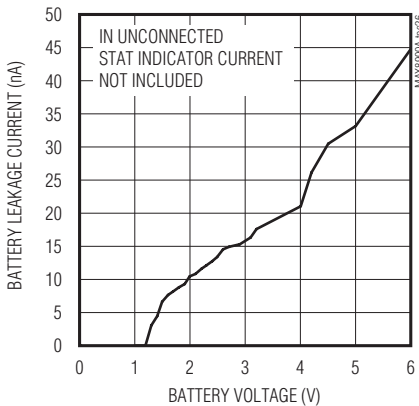


BATTERY + LX LEAKAGE CURRENT vs. AMBIENT TEMPERATURE

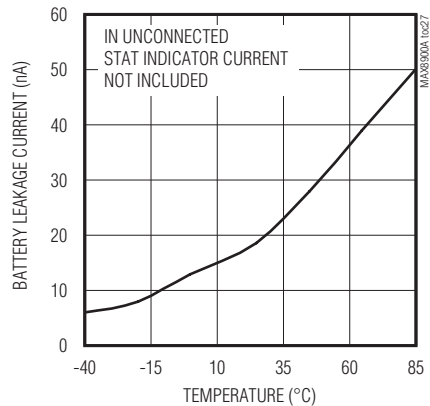


AVL VOLTAGE vs. INPUT VOLTAGE

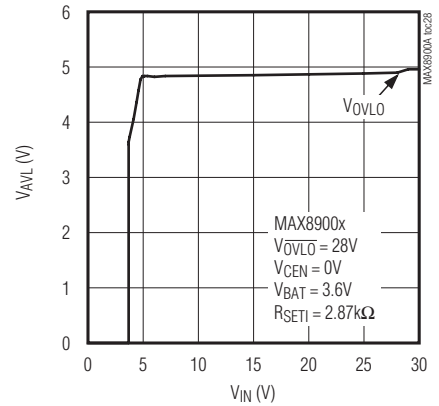

MAX8900_ CHARGE PROFILE (CONSTANT-CURRENT TO DONE MODES)

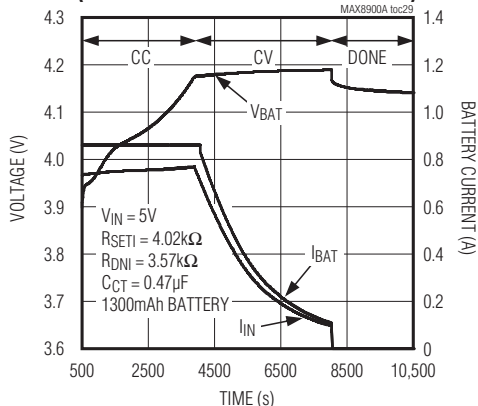






MAX8900_ CHARGE PROFILE (CHARGER RESTART)

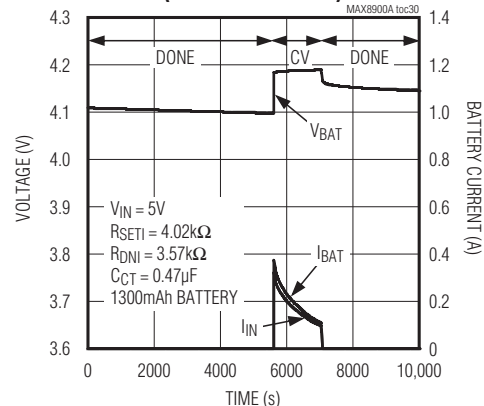

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring


Typical Operating Characteristics (continued)

(Circuit of Figure 1, $V_{IN} = 6V$, $V_{BAT} = 3.6V$, $T_A = +25^\circ C$, unless otherwise noted.)

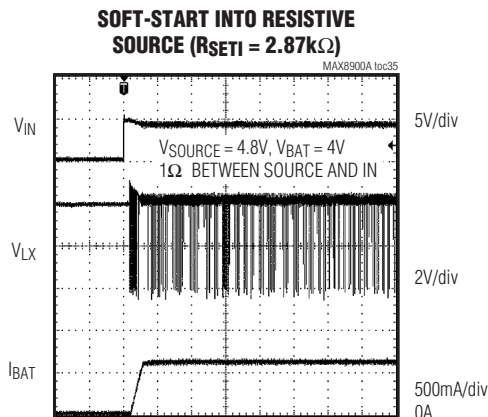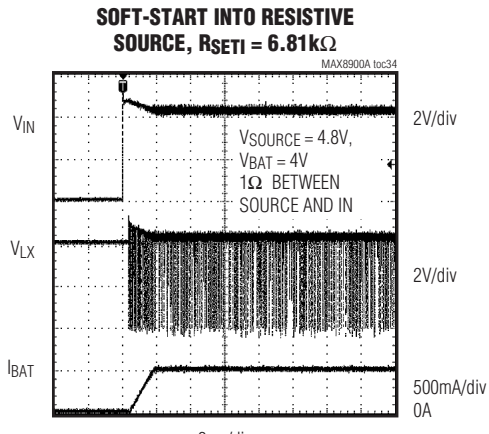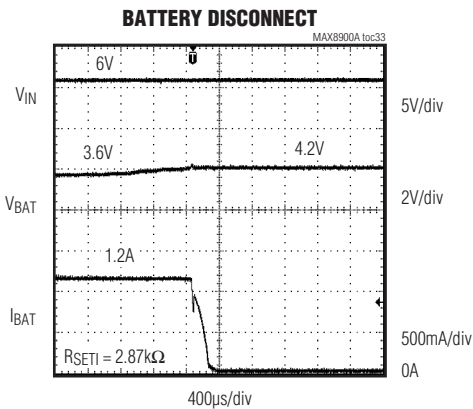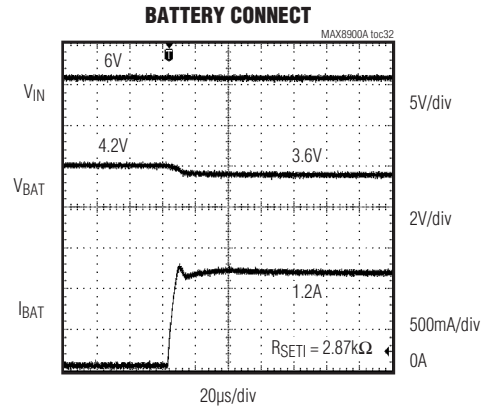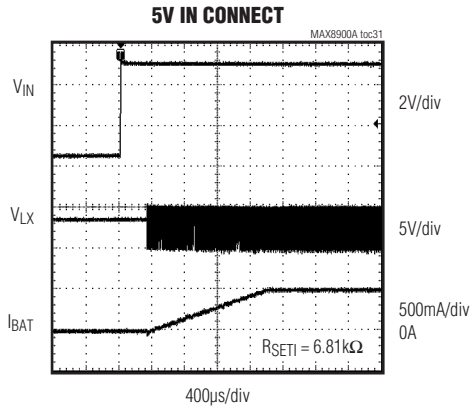

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

Pin Configuration

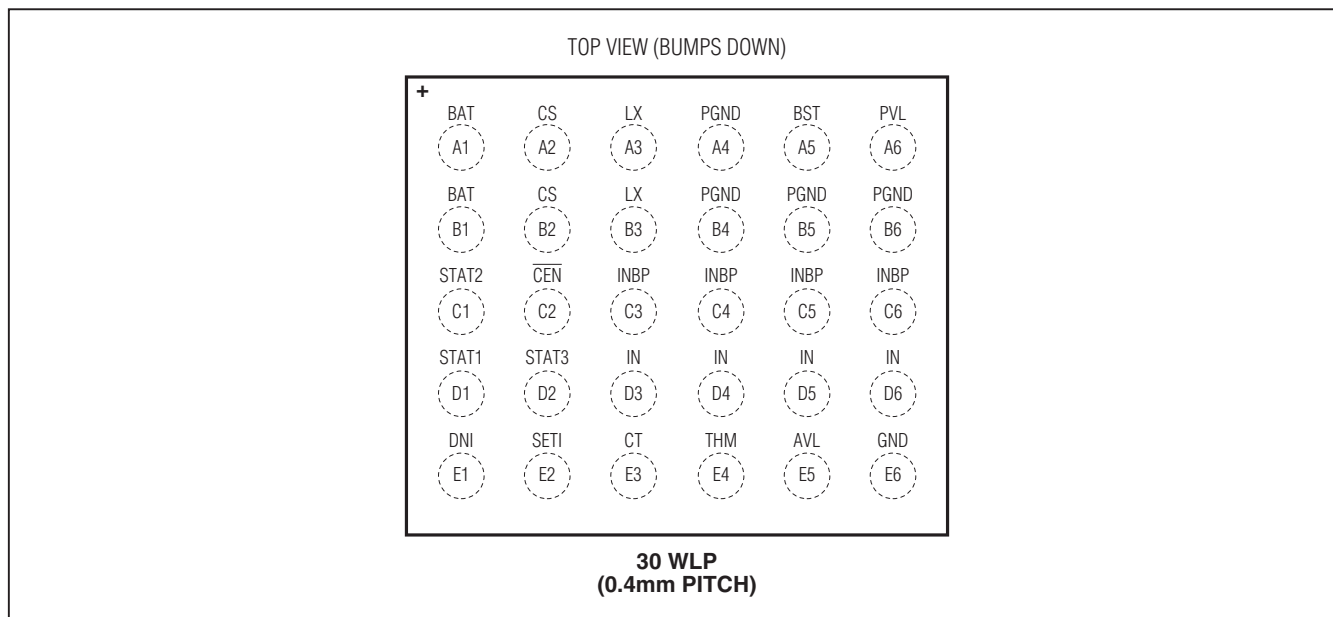

Pin Description

| PIN | NAME | FUNCTION |
|----------------|-------------------------|--|
| A1, B1 | BAT | Connection to Battery. Connect to a single-cell Li+/Li-Poly battery from BAT to PGND. Connect both BAT pins together externally. Bypass BAT to PGND with a 2.2µF ceramic capacitor. |
| A2, B2 | CS | 40mΩ Current-Sense Node. Connect the inductor from LX to CS. Connect both CS pins together externally. |
| A3, B3 | LX | Inductor Switching Node. Connect the inductor between LX and CS. Connect both LX pins together externally. When enabled ($\overline{\text{CEN}} = 0$), LX switches between INBP and PGND to control the battery charging. When disabled ($\overline{\text{CEN}} = 1$), the LX switches are high-impedance however they still have body diodes as shown in Figure 3. |
| A4, B4, B5, B6 | PGND | Power Ground for Step-Down Low-Side Synchronous n-Channel MOSFET. Connect all PGND pins together externally. |
| A5 | BST | Supply for High-Side n-Channel Gate Driver. Bypass BST to LX with a 0.1µF ceramic capacitor. |
| A6 | PVL | 5V Linear Regulator to Power Internal Circuits. PVL also charges the BST capacitor. Bypass PVL to PGND with a 1.0µF ceramic capacitor. Powering external loads from PVL is not recommended. |
| C1 | STAT2 | Status Output 2. STAT2 is an open-drain output that has a 30V absolute maximum rating and a typical pulldown resistance of 25Ω. For the MAX8900A, STAT1 and STAT2 indicate different states as shown in Table 4. For the MAX8900B/MAX8900C, STAT1, STAT2, and STAT3 indicate different operating states of the MAX8900_ as shown in Table 3. |
| C2 | $\overline{\text{CEN}}$ | Charge Enable Input. $\overline{\text{CEN}}$ has an internal 200kΩ pulldown resistor. Pull $\overline{\text{CEN}}$ low or leave it unconnected to enable the MAX8900_. Drive $\overline{\text{CEN}}$ high to disable the MAX8900_. Note: V_{IN} must be greater than $V_{\text{UVLO-RISING}}$ for the MAX8900_ to operate when $\overline{\text{CEN}}$ is pulled low. For example, if $\overline{\text{CEN}}$ is low and the MAX8900_ is operating with $V_{\text{UVLO-FALLING}} < V_{\text{IN}} < V_{\text{UVLO-RISING}}$, then toggling $\overline{\text{CEN}}$ results in a nonoperating condition. |

MAX8900A/MAX8900B/MAX8900C

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

Pin Description (continued)

| PIN | NAME | FUNCTION |
|-------|-------|---|
| C3–C6 | INBP | Power Input Bypass. Connect all INBP pins together externally. Bypass INBP to PGND with a 0.47 μ F ceramic capacitor. |
| D1 | STAT1 | Status Output 1. STAT1 is an open-drain output that has a 30V absolute maximum rating and a typical internal pulldown resistance of 25 Ω . For the MAX8900A, STAT1 and STAT2 indicate different states as shown in Table 4. For the MAX8900B/MAX8900C, STAT1, STAT2, and STAT3 indicate different operating states of the MAX8900_ as shown in Table 3. |
| D2 | STAT3 | Status Output 3. STAT3 is an open-drain output that is a 6V absolute maximum rating and a typical pulldown resistance of 10 Ω . For the MAX8900A, STAT1 and STAT2 indicate different states as shown in Table 4. For the MAX8900B/MAX8900C, STAT1, STAT2, and STAT3 indicate different operating states of the MAX8900_ as shown in Table 3. |
| D3–D6 | IN | Power Input. IN is capable of delivering 1.2A to the battery and/or system. Connect all IN pins together externally. Bypass IN to PGND with a 0.47 μ F ceramic capacitor. |
| E1 | DNI | Done/Prequalification Program Input. DNI is a dual function pin that sets both the done current threshold and the prequalification charge rate. Connect a resistor from DNI to GND to set the threshold between 10mA and 200mA. DNI is pulled to GND during shutdown. |
| E2 | SETI | Fast-Charge Current Program Input. Connect a resistor from SETI to GND to set the fast-charge current from 0.05A to 1.2A. SETI is pulled to GND during shutdown. |
| E3 | CT | Charge Timer Set Input. A capacitor (C_{CT}) from CT to GND sets the prequalification/dead-battery and fast-charge fault timers. Use 0.1 μ F for 180-minute fast-charge time limit and 30-minute prequalification/dead-battery time limit. Connect to GND to disable the timer. |
| E4 | THM | Thermistor Input. Connect a negative temperature coefficient (NTC) thermistor from THM to GND. Connect a resistor equal to the thermistor's +25 $^{\circ}$ C resistance from THM to AVL. Thermistor adjusts the charge current and termination voltage as described in the JEITA specification for safe use of secondary Li+ batteries. See Figure 10. To disable the THM operation, bias V_{THM} midway between AVL and GND. |
| E5 | AVL | 5V Linear Regulator to Power Low-Noise Internal Circuits. Bypass AVL to GND with a 0.1 μ F ceramic capacitor. Powering external loads from AVL is not recommended. |
| E6 | GND | Ground. GND is the low-noise ground connection for the internal circuitry. See the <i>PCB Layout</i> section for more details. |

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

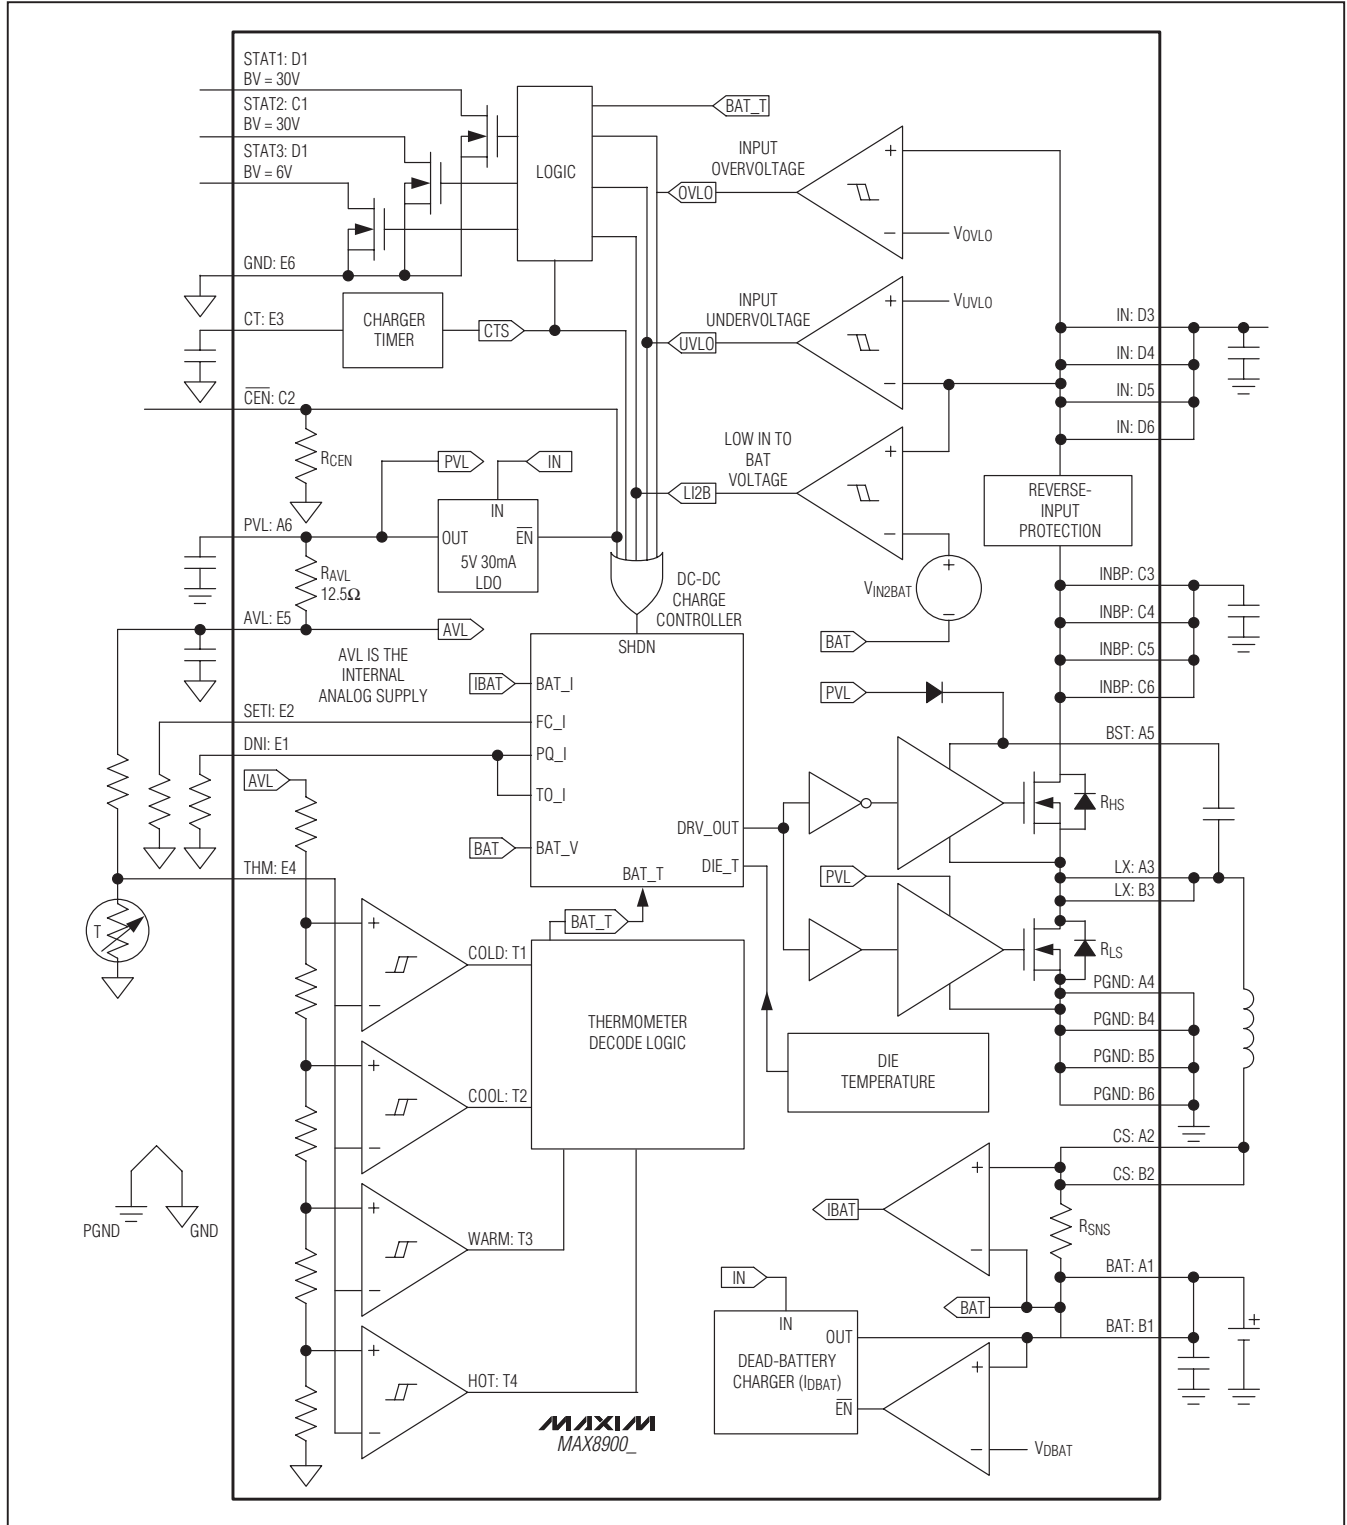


Figure 3. Functional Diagram

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

Detailed Description

The MAX8900_ is a full-featured, high-frequency switch-mode charger for a 1-cell Li+ or Li-Poly battery. It delivers up to 1.2A to the battery from 3.4V to 6.3V (MAX8900A/MAX8900C) or 3.4V to 8.7V (MAX8900B). Contact the factory for input operating voltage ranges up to +20V. The 3.25MHz switch-mode charger is ideally suited to small portable devices such as headsets and ultra-portable media players because it minimizes component size and heat.

Several features make the MAX8900_ ideal for high reliability systems. The MAX8900_ is protected against input voltages as high as +22V and as low as -22V. Battery protection features include low voltage prequalification, charge fault timer, die temperature monitoring, and battery temperature monitoring. The battery temperature monitoring adjusts the charge current and termination voltage as described in the JEITA (Japan Electronics and Information Technology Industries Association) specification for safe use of secondary Li+ batteries. The full title of the standard is *A Guide to the Safe Use of Secondary Lithium Ion Batteries in Notebook-Type Personal Computers*, April 20, 2007.

Charge parameters are easily adjustable with external components. An external resistance adjusts the charge current from 50mA to 1200mA. Another external resistance adjusts the prequalification and done current thresholds from 10mA to 200mA. The done current threshold is very accurate achieving $\pm 1mA$ at the 10mA level. The charge timer is adjustable with an external capacitor.

Control Scheme

A proprietary hysteretic current PWM control scheme ensures high efficiency, fast switching, and physically tiny external components. Inductor ripple current is internally set to provide 3.25MHz. At very high duty factors, when the input voltage is lowered close to the output voltage, the steady-state duty ratio does not allow 3.25MHz operation because of the minimum off-time. The controller then provides minimum off-time, peak current regulation. Similarly, when the input voltage is too high to allow 3.25MHz operation due to the minimum on-time, the controller becomes a minimum on-time, valley current regulator. In this way, the ripple current in the inductor is always as small as possible to reduce the output ripple voltage. The inductor ripple current is made to vary with input and output voltage in a way that reduces frequency variation.

Soft-Start

To prevent input current transients, the rate of change of the input current (di/dt) and charge current is limited. When the input is valid, the charge current ramps from 0mA to the fast-charge current value in 1.5ms. Charge current also soft-starts when transitioning from the prequalification state to the fast-charge state. There is no di/dt limiting when transitioning from the done state to the fast-charge state (Figures 7 and 8). Similarly, if RSETI is changed suddenly when using a switch or variable resistor at SETI as shown in Figure 2 there is no di/dt current limiting.

Setting the Fast-Charge Current (SETI)

As shown in Figure 4, a resistor from SETI to ground (RSETI) sets the fast-charge current (IFC). The MAX8900_ supports values of IFC from 50mA to 1200mA. Select RSETI as follows:

$$IFC = 3405V/RSETI$$

Determine the optimal IFC for a given system by considering the characteristics of the battery and the capabilities of the charge source.

Example 1: If you are using a 5V $\pm 5\%$ 1A charge source along with an 800mAh battery that has a 1C fast-charge rating, then choose RSETI to be 4.42k Ω $\pm 1\%$. This value provides a typical charge current of 770mA. Given the $\pm 2\%$ six sigma limit on the MAX8900_ fast-charge current accuracy along with the $\pm 1\%$ accuracy of the resistor, we can reasonably expect that the 770mA typical value has an accuracy of $\pm 2.2\%$ ($2.2 \approx \sqrt{2^2 + 1^2}$) or $\pm 17mA$. Furthermore, since the MAX8900_ charger uses a step-down converter topology, we can guarantee that the input current is less than or equal to the output current so we do not violate the 1A rating of the charge source.

Depending on its mode of operation, the MAX8900_ controls the voltage at SETI to be between 0V and 1.5V. Avoid adding capacitance directly to the SETI pin that exceeds 10pF.

As a protection feature, if the battery temperature is between the T2 and T4 thresholds and SETI is shorted to ground, then the MAX8900_ latches off the battery charger and enters the timer fault state. This protection feature is disabled outside of fast-charge, top-off, done mode and inside thermal foldback. Furthermore, if SETI is unconnected, then the battery fast-charge current is 0A.

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

Setting the Prequalification Current and Done Threshold (DNI)

As shown in Figure 5, a resistor from DNI to ground (RDNI) sets the prequalification current (IPQ) and done current (IDN). The MAX8900_ supports values of RDNI from 1.19kΩ to 38.2kΩ. Select RDNI as follows:

$$IDN = 384V/RDNI \quad IPQ = 415V/RDNI$$

Determine the optimal IPQ and IDN for a given system by considering the characteristics of the battery.

Depending on its mode of operation, the MAX8900_ controls the voltage at DNI from 0 to 1.5V. Avoid adding capacitance directly to the SETI pin that exceeds 10pF.

As shown in Figure 10, the prequalification current and done threshold is set to 50% of programmed value when $T1 < THM < T2$, and 100% of programmed value when $T2 < THM < T4$.

As a protection feature, if the battery temperature is between the T2 and T4 thresholds and DNI is shorted to ground, then the MAX8900_ latches off the battery charger and enters the timer fault state. This protection feature is disabled inside of dead-battery mode and thermal foldback. Furthermore, if DNI is unconnected, then the prequalification and done current is 0A and the charge timer prevents the MAX8900_ from indefinitely operating in its done state.

Charge Enable Input (CEN)

CEN is a digital input. Driving CEN high disables the battery charger. Pull CEN low or leave it unconnected

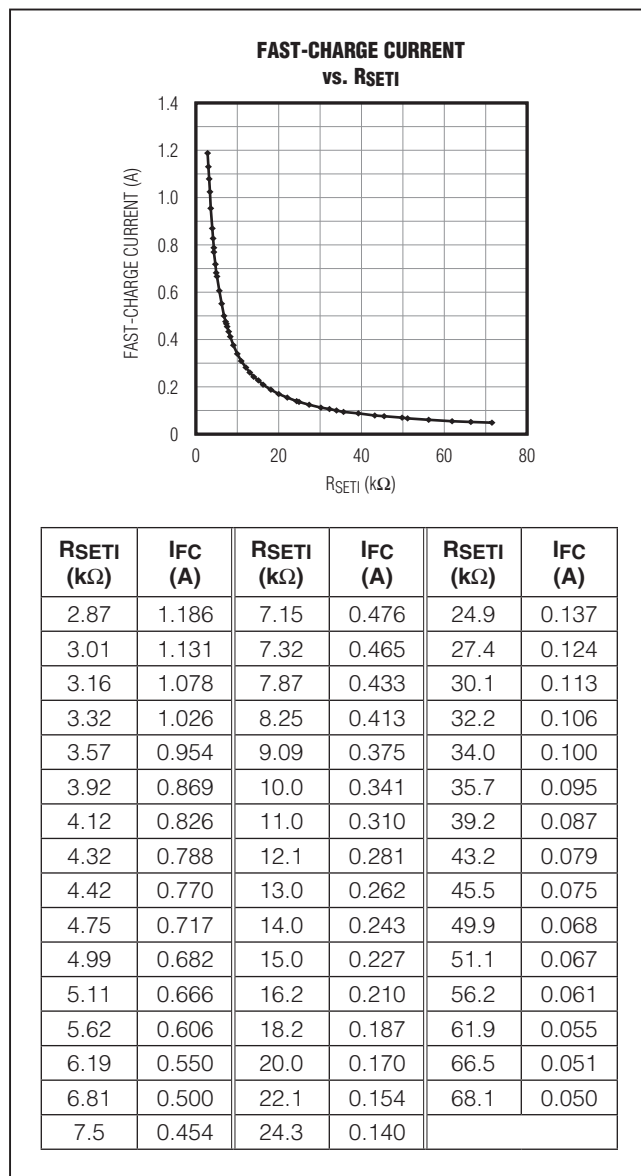


Figure 4. Fast-Charge Current vs. RSETI (www.maxim-ic.com/tools/other/software/MAX8900-RSETI.XLS)

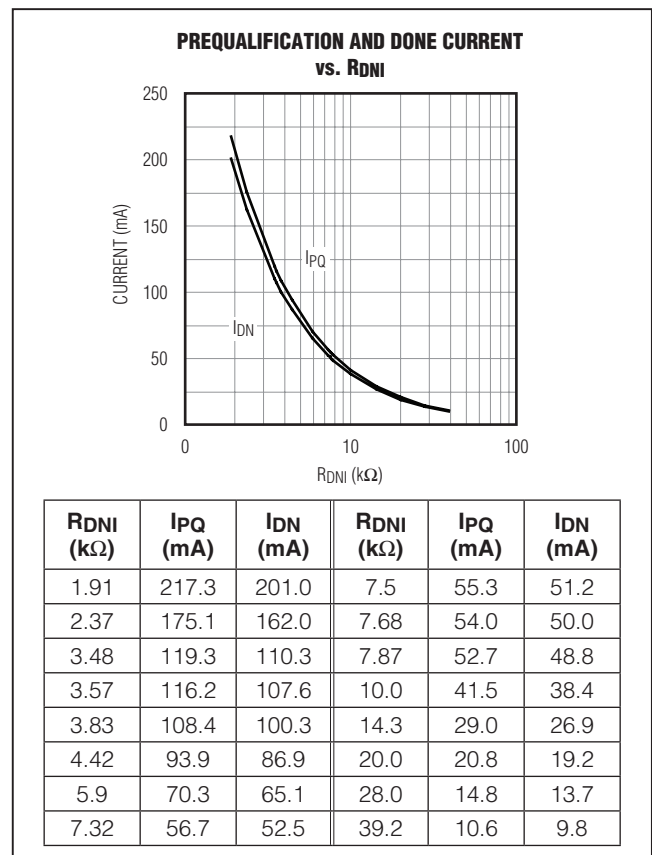


Figure 5. Prequalification Current and Done Threshold vs. RDNI (www.maxim-ic.com/tools/other/software/MAX8900-DNI.XLS)

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

to enable the MAX8900_. \overline{CEN} has an internal 200kΩ pull-down resistor. When disabled, the MAX8900_ supply current is reduced, the step-down converter high-side and low-side switches are off, and the AVL is disabled.

In many systems, there is no need for the system controller (typically a microprocessor (μP)) to disable the charger because the MAX8900_ independently manages the charger. In these situations, \overline{CEN} can be connected to ground or left unconnected. **Note:** if \overline{CEN} is permanently connected to ground or left unconnected, the input power must be cycled to escape from a timer fault state (see Figures 7 and 8 for more information).

V_{IN} must be greater than $V_{UVLO-RISING}$ for the MAX8900_ to operate when \overline{CEN} is pulled low. For example, if \overline{CEN} is low and the MAX8900_ is operating with $V_{UVLO-FALLING} < V_{IN} < V_{UVLO-RISING}$, then toggling \overline{CEN} results in a nonoperating condition.

Charger States

The MAX8900_ utilizes several charging states to safely and quickly charge batteries as shown in Figure 7. Figure 6 shows an exaggerated view of a Li+/Li-Poly battery progressing through the following charge states when the die and battery are close to room temperature: dead battery → prequalification → fast-charge → top-off → done.

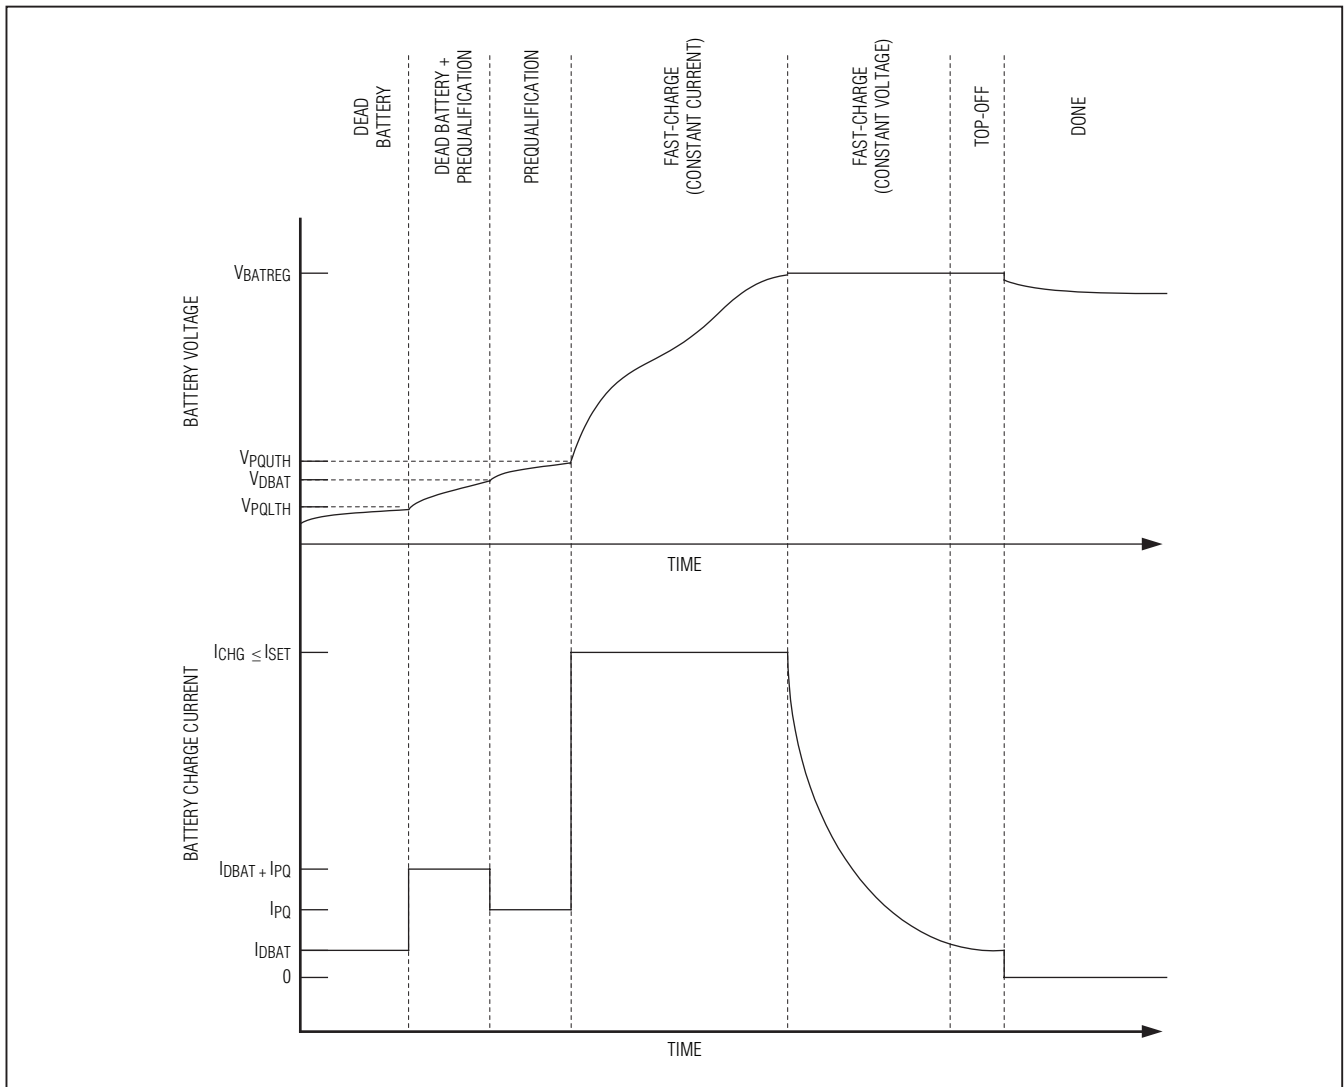


Figure 6. Li+/Li-Poly Charge Profile

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

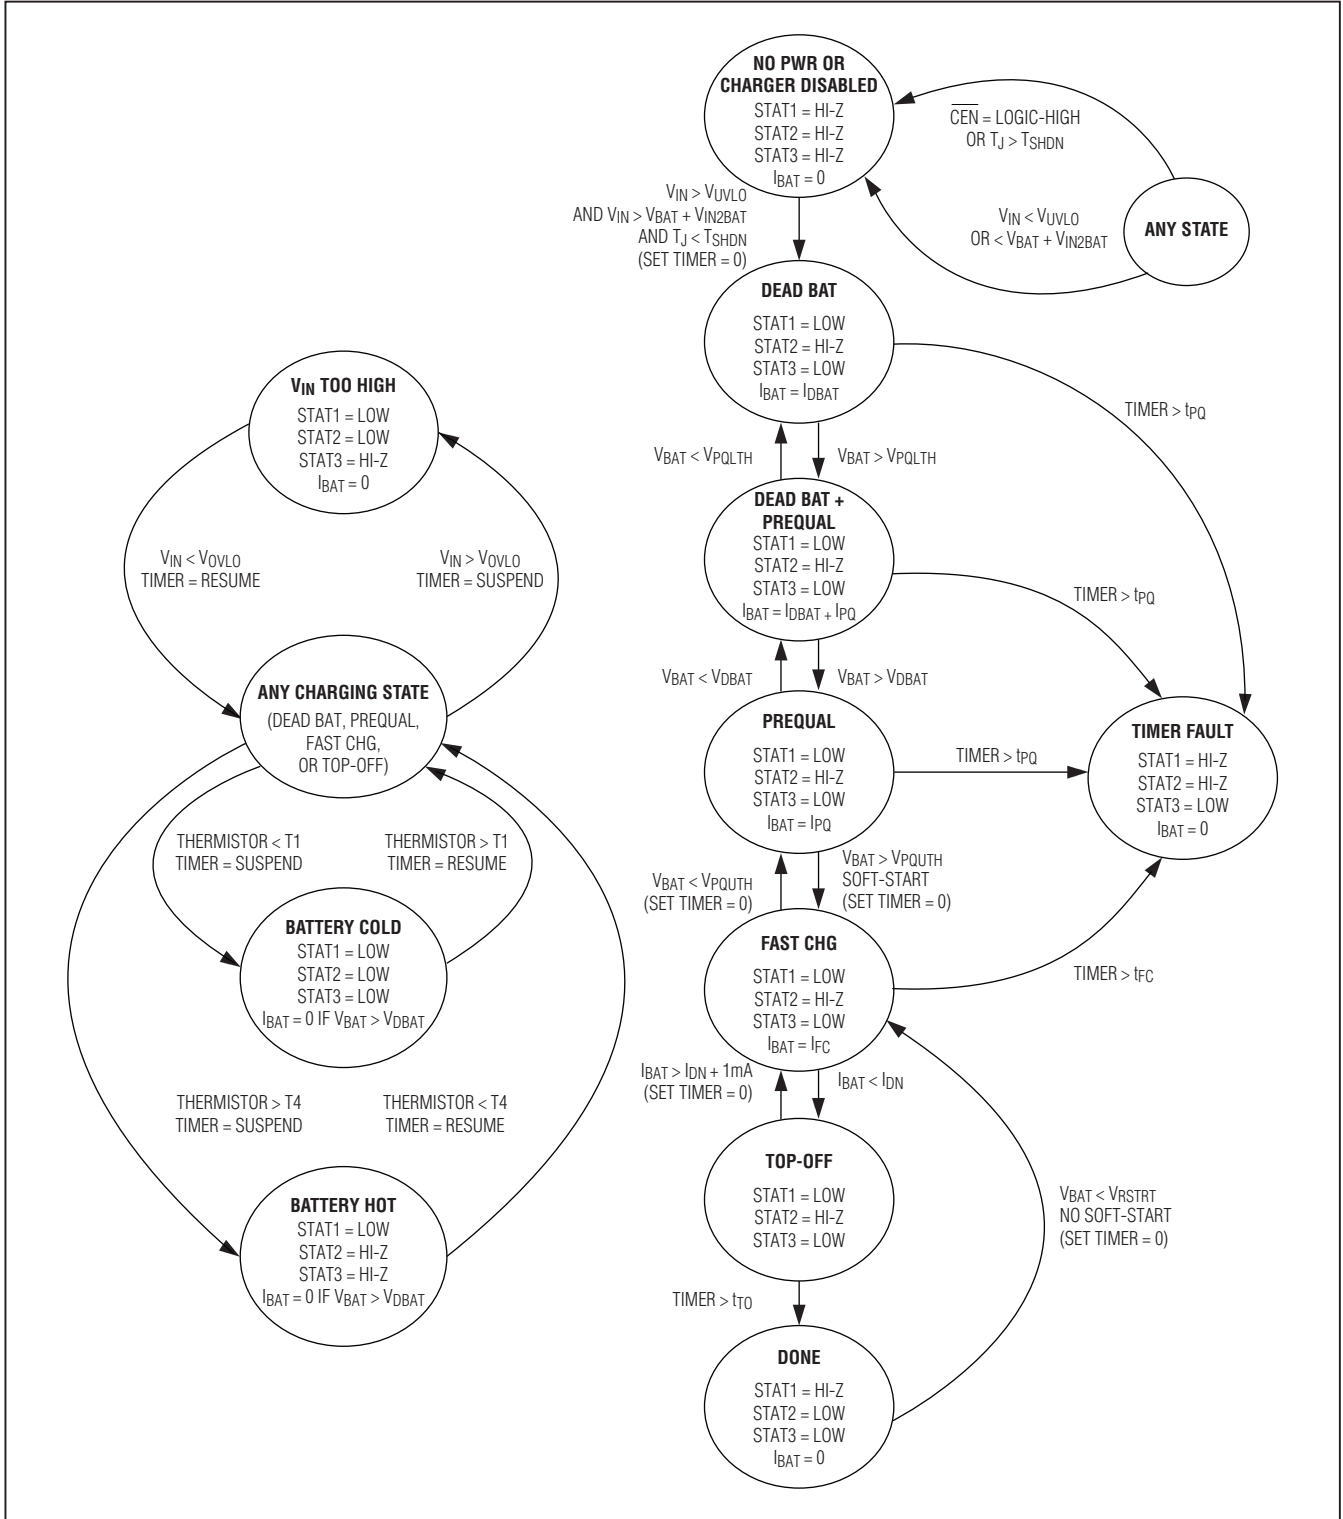


Figure 7. Charger State Diagram (3-Pin Status)

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

MAX8900A/MAX8900B/MAX8900C

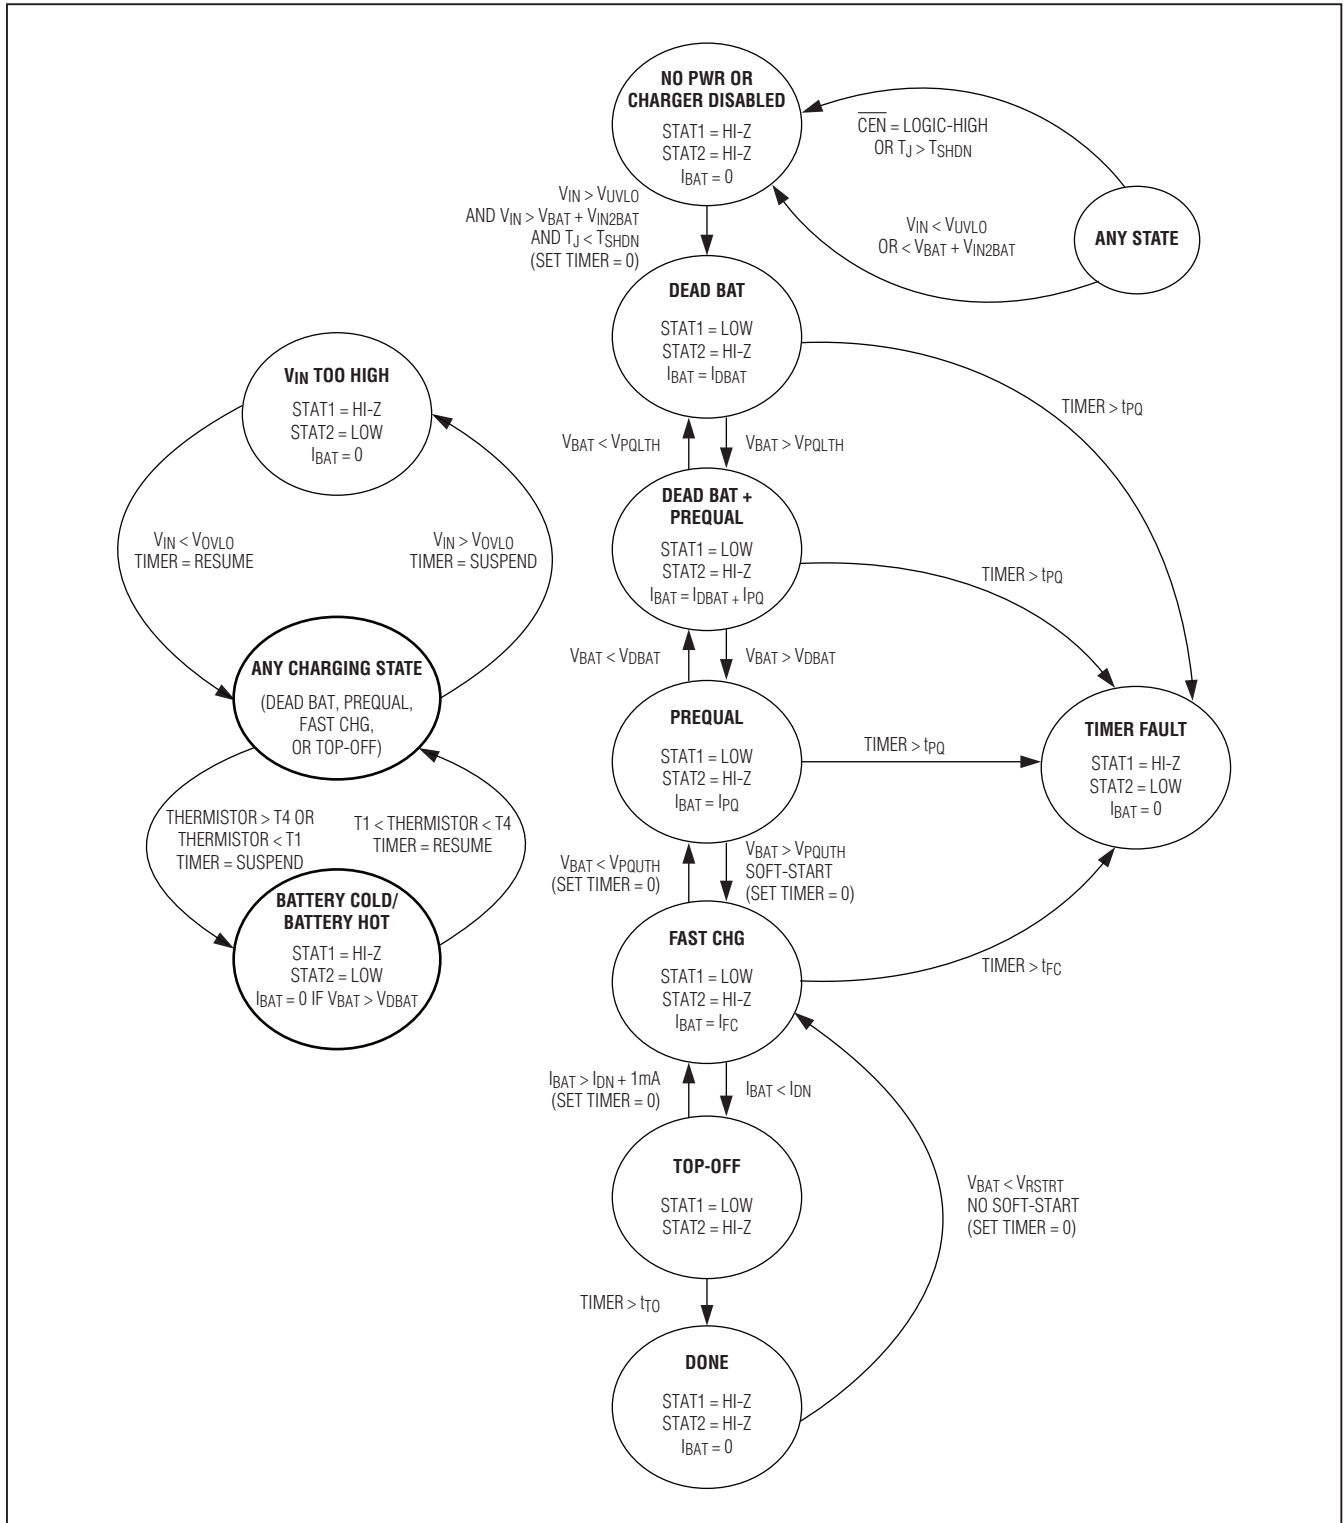


Figure 8. Charger State Diagram (2-Pin Status)

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

Charger Disabled State

When \overline{CEN} is high or the input voltage is out of range, the MAX8900_ disables the charger. To exit this state, \overline{CEN} must be low and the input voltage must be within its valid range.

Dead-Battery State

When a deeply discharged battery is inserted with a voltage of less than V_{PQLTH} , the MAX8900_ disables the switching charger and linearly charges with I_{DBAT} . If the MAX8900_ remains in this dead-battery state for longer than t_{PQ} , then it transitions to the timer fault state. This dead-battery state prevents the MAX8900_ from dissipating excessive power in the event of a shorted battery. Once V_{BAT} increases beyond V_{PQLTH} , the MAX8900_ transitions to the dead battery + prequalification state.

Dead Battery + Prequalification State

The dead battery + prequalification state occur when the battery voltage is greater than V_{PQLTH} and less than V_{DBAT} . In this state, both the linear dead-battery charger and the switching charger are on and delivering current to the battery. The total battery current is $I_{DBAT} + I_{PQ}$. If the MAX8900_ remains in this state for longer than t_{PQ} , then it transitions to the timer fault state. A normal battery typically stays in the dead-battery + prequalification state for several minutes or less and when the battery voltage rises above V_{DBAT} , the MAX8900_ transitions to the prequalification state.

Prequalification State

The prequalification state occurs when the battery voltage is greater than V_{DBAT} and less than V_{PQUTH} .

In this state, the linear dead-battery charger is turned off and only the switching charger is on and delivering current to the battery. The total battery current is I_{PQ} . If the MAX8900_ remains in this state for longer than t_{PQ} , then the MAX8900_ transitions to the timer fault state. A normal battery typically stays in the prequalification state for several minutes or less and when the battery voltage rises above V_{PQUTH} , the MAX8900_ transitions to the fast-charge constant current state.

As shown in Figure 10, the prequalification current and done threshold is set to 50% of programmed value when $T1 < THM < T2$, and 100% of programmed value when $T2 < THM < T4$.

Fast-Charge Constant Current State

The fast-charge constant current state occurs when the battery voltage is greater than V_{PQUTH} and less than V_{BATREG} . In this state, the switching charger is on and

delivering current to the battery. The total battery current is I_{FC} . If the MAX8900_ remains in this state and the fast-charge constant voltage state for longer than t_{FC} , then the MAX8900_ transitions to the timer fault state. When the battery voltage rises to V_{BATREG} , the MAX8900_ transitions to the fast-charge constant voltage state. As shown in Figure 10, the fast-charge constant current is set to 50% of programmed value when $T1 < THM < T2$, and 100% of programmed value when $T2 < THM < T4$.

The MAX8900_ dissipates the most power in the fast-charge constant current state. This power dissipation causes the internal die temperature to rise. If the die temperature exceeds T_{REG} , I_{FC} is reduced. See the *Thermal Foldback* section for more detail.

If there is low input voltage headroom ($V_{IN} - V_{BAT}$), then I_{FC} decreases due to the impedance from IN to BAT. See Figure 13 for more detail.

Fast-Charge Constant Voltage State

The fast-charge constant voltage state occurs when the battery voltage is at the V_{BATREG} and the charge current is greater than I_{DN} . In this state, the switching charger is on and delivering current to the battery. The MAX8900_ maintains V_{BATREG} and monitors the charge current to detect when the battery consumes less than the I_{DN} current. When the charge current decreases below the I_{DN} threshold, the MAX8900_ transitions to the top-off state. If the MAX8900_ remains in the fast-charge constant current state and this state for longer than t_{FC} , then the MAX8900_ transitions to the timer fault state. Please note when the battery temperature is between $T3$ and $T4$ the BAT regulation voltage is reduced to 4.075V.

The MAX8900_ offers an adjustable done current threshold (I_{DN}) from 10mA to 200mA. The accuracy of the top-off current threshold is $\pm 1mA$ when it is set for 10mA. This accurate threshold allows the maximum amount of charge to be stored in the battery before the MAX8900_ transitions into done state.

Top-Off State

The top-off state occurs when the battery voltage is at V_{BATREG} and the battery current decreases below I_{DN} . In this state, the switching charger is on and delivers current to the battery. The MAX8900_ maintains V_{BATREG} for a specified time (t_{TO}). When t_{TO} expires, the MAX8900_ transitions to the done state. If the charging current increases to $I_{DN} + 1mA$ before t_{TO} expires, then the charger re-enters the fast-charge constant voltage state.

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

Done State

The MAX8900_ enters its done state after the charger has been in the top-off state for t_{TO} . In this state, the switching charger is off and no current is delivered to the battery. Although the charger is off, the SETI and DNI pins are biased in the done state and the MAX8900_ consumes the associated current from the battery ($I_{BAT} = 1.5V/R_{SETI} + 1.5V/R_{DNI} + 3\mu A$). If the system load presented to the battery is low ($\ll 100\mu A$), then a typical system can remain in the done state for many days. If left in the done state long enough, the battery voltage decays below the restart threshold (V_{RSTRT}) and the MAX8900_ transitions back into the fast-charge state. There is no soft-start (di/dt limiting) during the done-to-fast-charge state transition.

Timer Fault State

The timer fault state occurs when either the prequalification or fast-charge timers expire, or SETI/DNI is shorted to ground (see the *Setting the Fast-Charge Current (SETI)* and *Setting the Prequalification Current and Done Threshold (DNI)* sections for more details). In this state the charger is off. The charger can exit the timer fault state by either cycling \overline{CEN} or input power.

Battery Hot/Cold State

The battery hot/cold state occurs when the MAX8900_ is in any of its charge states (dead battery, prequalification, fast-charge, top-off) and thermistor temperature is either less than T_1 or greater than T_4 . In this state, the charger is off and timers are suspended. The MAX8900_ exits the temperature suspend state and returns to the state it came from once the thermistor temperature is greater than T_1 and less than T_4 . The timer resumes once the MAX8900_ exits this state.

V_{IN} Too High State

The V_{IN} too high state occurs when the MAX8900_ is in any of its charge states (dead battery, prequalification, fast-charge, top-off) and V_{IN} exceeds V_{OVLO} . In this state, the charger is off and timers are suspended. The MAX8900_ exits the V_{IN} too high state and returns to the state it came from when V_{IN} decreases below V_{OVLO} . The timer resumes once the MAX8900_ exits this state.

Charge Timer (CT)

As shown in Figure 7, a fault timer prevents the battery from charging indefinitely. In the dead-battery, prequalification, and fast-charge states, the timer is controlled by the capacitance at CT (C_{CT}). The MAX8900_ supports values of C_{CT} from $0.01\mu F$ to $1.0\mu F$. Calculate the prequalification time (t_{PQ}) and fast-charge time (t_{FC}) as follows (Figure 9):

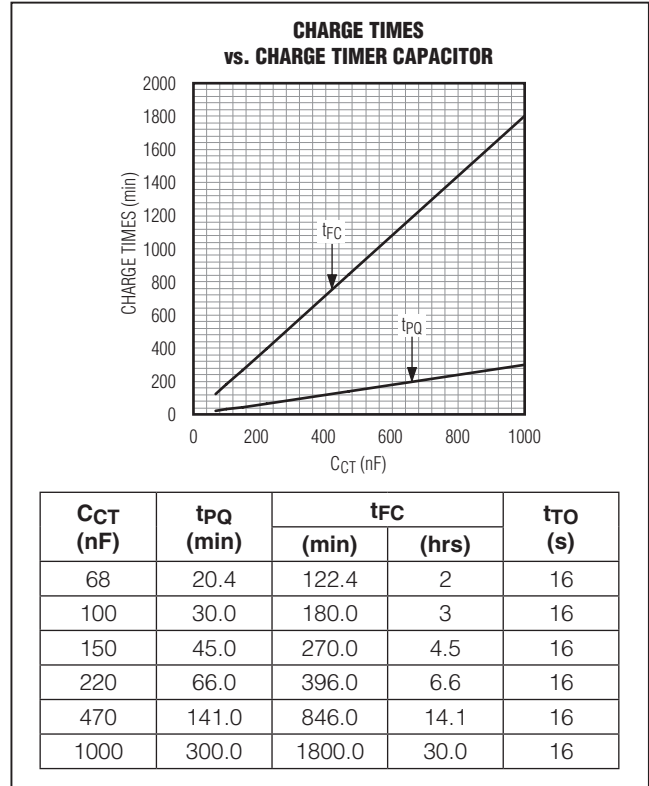


Figure 9. Charge Times vs. C_{CT}

$$t_{PQ} = 30\text{min} \times \frac{C_{CT}}{0.1\mu F}$$

$$t_{FC} = 180\text{min} \times \frac{C_{CT}}{0.1\mu F}$$

The top-off time (t_{TO}) is fixed at 16s:

$$t_{TO} = 16\text{s}$$

Connect CT to GND to disable the prequalification/dead-battery and fast-charge timers. With the internal timers of the MAX8900_ disabled, an external device, such as a μP can control the charge time through the \overline{CEN} input.

Thermal Management

The MAX8900_ is packaged in a $2.44\text{mm} \times 2.67\text{mm} \times 0.64\text{mm}$, 0.4mm pitch WLP package and withstands a junction temperature of $+150^\circ\text{C}$. The MAX8900_ is rated for the extended ambient temperature range from -40°C to $+85^\circ\text{C}$. Table 1 and Application Note 1891: *Wafer-Level Packaging (WLP) and Its Applications* (www.maxim-ic.com/ucsp) show the thermal characteristics of this package. The MAX8900_ uses several

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

Table 1. 2.44mm x 2.67mm x 0.64mm, 0.4mm Pitch WLP Thermal Characteristics

| | FOUR-LAYER PCB (JESD51-9:2s2p) |
|------------------------------|--|
| Continuous Power Dissipation | 1619mW Derate 20.2mW/°C above +70°C/W |
| θ_{JA} | 49.4°C/W |
| θ_{JC} | 9°C/W |
| Board Parameters | <ul style="list-style-type: none"> • Still air • 4-layer board • 1.5oz copper on outer layers • 1oz copper on inner layers • 1.6mm thick board (62mil) • 4in x 4in board • Four center thermal vias • FR-4 |

thermal management techniques to prevent excessive battery and die temperatures.

Thermistor Monitor (THM)

The MAX8900_ adjusts the charge current and termination voltage as described in the JEITA specification for safe use of secondary Li+ batteries (*A Guide to the Safe Use of Secondary Lithium Ion Batteries in Notebook-type Personal Computers, April 20, 2007*). As shown in Figure 10, there are four temperature thresholds that change the battery charger operation: T1, T2, T3, and T4. When the thermistor input exceeds the extreme temperatures (< T1 or > T4), the charger shuts off and all respective charging timers are suspended. While the thermistor remains out of range, no charging occurs, and the timer counters hold their state. When the thermistor input comes back into range, the charge timers continue to count. The middle thresholds (T2 and T3) do not shut the charger off, but adjust the current/voltage targets to maximize charging while reducing battery stress. Between T3 and T4, the voltage target is reduced (see VBATREG in the *Electrical Characteristics* table); however, the charge timers continue to count. Between T1 and T2, the charging current target is reduced to 50% of its normal operating value; and similarly the charge timers continue to count.

If the thermistor functionality is not required, connect a 1M Ω resistor from THM to AVL and another 1M Ω resistor from THM to GND. This biases the THM node to be ½ of the AVL voltage telling the MAX8900_ that the battery temperature is between the T2 and T3 temperature range. Furthermore, the high 2M Ω impedance presents a minimal load to AVL.

Table 2 shows that the MAX8900_ is compatible with several standard thermistor values. When using a 10k Ω thermistor with a beta of 3380K, the configuration of Figure 11A provides for temperature trip thresholds that are very close to the nominal T1, T2, T3, and T4 (see the *Electrical Characteristics* table). When using alternate resistance and/or beta thermistors, the circuit of Figure 11A may result in temperature trip thresholds that are different from the nominal values. In this case, the circuit of Figure 11B allows for compensating the thermistor to shift the temperature trip thresholds back to the nominal value. In general, smaller values of R_{TP} shift all the temperature trip thresholds down; however, the lower temperature thresholds are affected more than the higher temperature thresholds. Furthermore, larger values of R_{TS} shift all the temperature trip thresholds up; however, the higher temperature thresholds are affected more than the lower temperature thresholds. For assistance with thermistor calculations, use the spreadsheet at the following link: www.maxim-ic.com/tools/other/software/MAX8900-THERMISTOR.XLS

The general relation of thermistor resistance to temperature is defined by the following equation:

$$R_{\text{THRM}} = R_{25} \times e^{\left(\beta \left(\frac{1}{T+273^{\circ}\text{C}} - \frac{1}{298^{\circ}\text{C}} \right) \right)}$$

where:

R_{THRM} = The resistance in Ω of the thermistor at temperature T in Celsius.

R₂₅ = The resistance in Ω of the thermistor at T_A = +25°C.

β = The material constant of the thermistor, which typically ranges from 3000K to 5000K.

T = The temperature of the thermistor in °C.

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

Table 2. Trip Temperatures for Different Thermistors

| THERMISTOR | TEMPERATURE | | | | | | |
|---|-------------|--------|---------|---------|-----------|---------|-----------|
| R _{THRM} at T _A = +25°C | 10,000 | 10,000 | 10,000 | 47,000 | 47,000 | 100,000 | 100,000 |
| Thermistor Beta (β[Ω]) | 3380 | 3940 | 3940 | 4050 | 4050 | 4250 | 4250 |
| RTB (Ω) | 10,000 | 10,000 | 10,000 | 47,000 | 47,000 | 100,000 | 100,000 |
| RTP (Ω) | OPEN | OPEN | 301,000 | OPEN | 1,200,000 | OPEN | 1,800,000 |
| RTS (Ω) | SHORT | SHORT | 499 | SHORT | 2,400 | SHORT | 6,800 |
| Resistance at T1_n15 (Ω) | 61,788 | 61,788 | 77,248 | 290,410 | 380,716 | 617,913 | 934,027 |
| Resistance at T1_0 (Ω) | 29,308 | 29,308 | 31,971 | 137,750 | 153,211 | 293,090 | 343,283 |
| Resistance at T2 (Ω) | 15,000 | 15,000 | 15,288 | 70,500 | 72,500 | 150,002 | 156,836 |
| Resistance at T3 (Ω) | 5,309 | 5,309 | 4,906 | 24,954 | 23,083 | 53,093 | 47,906 |
| Resistance at T4 (Ω) | 2,910 | 2,910 | 2,439 | 13,676 | 11,434 | 29,099 | 22,777 |
| Temperature at T1_n15 (°C) [-15°C nom] | -16.2 | -11.1 | -14.9 | -10.2 | -14.8 | -8.7 | -15.4 |
| Temperature at T1_0 (°C) [0°C nom] | -0.8 | 2.6 | 0.9 | 3.2 | 1.2 | 4.1 | 1.3 |
| Temperature at T2 (°C) [+15°C nom] | 14.7 | 16.1 | 15.7 | 16.4 | 15.8 | 16.8 | 15.9 |
| Temperature at T3 (°C) [+45°C nom] | 42.6 | 40.0 | 42.0 | 39.6 | 41.5 | 38.8 | 41.2 |
| Temperature at T4 (°C) [+60°C nom] | 61.4 | 55.7 | 60.6 | 54.8 | 59.6 | 53.2 | 59.2 |

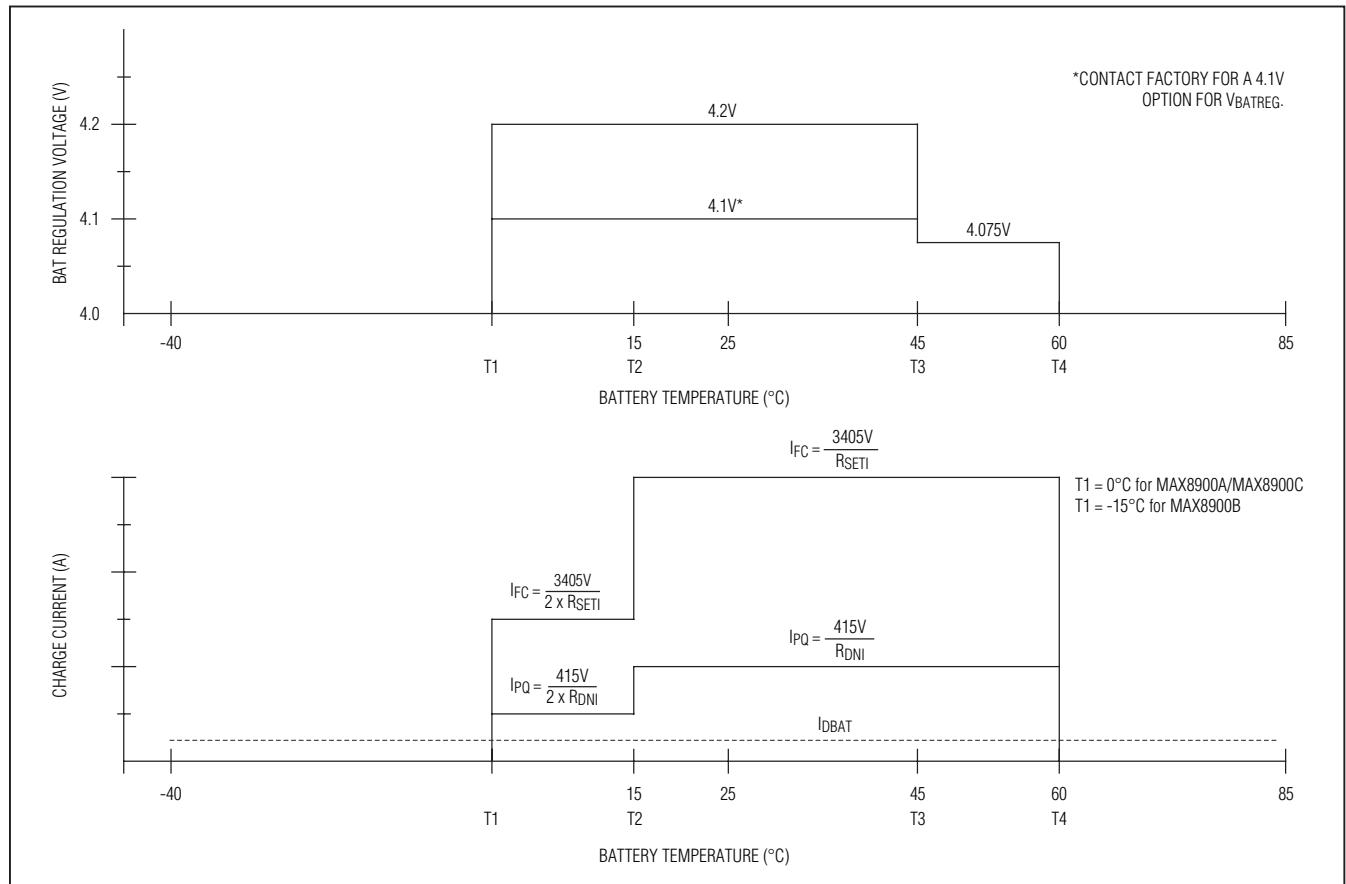


Figure 10. JEITA Battery Safety Regions

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

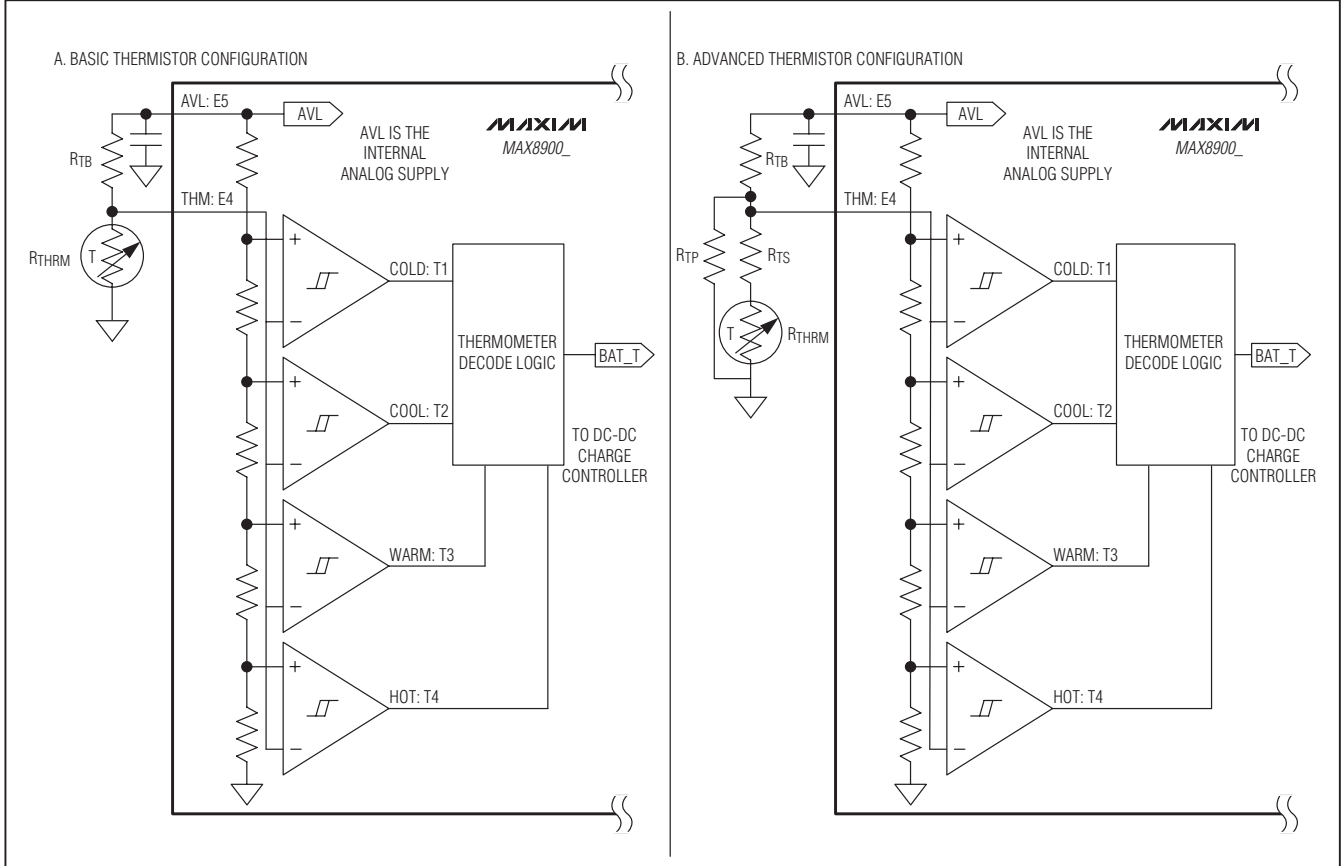


Figure 11. Thermistor Monitor Detail

Thermal Foldback

Thermal foldback maximizes the battery charge current while regulating the MAX8900_ junction temperature. As shown in Figure 12, when the die temperature exceeds TREG, a thermal limiting circuit reduces the battery charge-current target by ATREG, until the charge current reaches 25% of the fast-charge current setting. The charger maintains 25% of the fast-charge current until the die temperature reaches TSHDN. Please note that the MAX8900_ is rated for a maximum ambient temperature of +85°C. Furthermore, although the maximum die temperature of the MAX8900_ is +150°C, it is common industry practice to design systems in such a way that the die temperature never exceeds +125°C. Limiting the maximum die temperature to +125°C extends long-term reliability.

Thermal Shutdown

As shown in Figure 12, when the MAX8900_ die temperature exceeds TSHDN, the IC goes into thermal shutdown.

During shutdown, the step-down charger is off and all internal blocks except the bias circuitry is turned off. Once the junction has cooled by 15°C, the IC resumes operation.

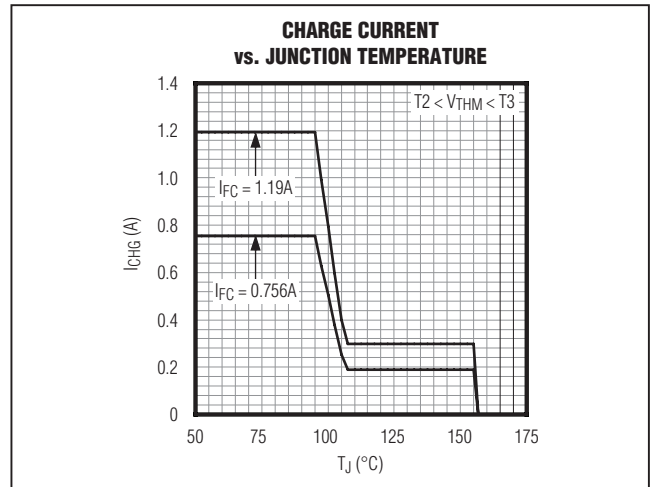


Figure 12. Charge Current vs. Junction Temperature

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

PVL and AVL Regulator

PVL is a 5V linear regulator that the MAX8900_ uses to power the gate drivers for its step-down charger. PVL also charges the BST capacitor. The PVL linear regulator is on when \overline{CEN} is low, V_{IN} is greater than $\sim 2V$, and V_{IN} is above V_{BAT} by the V_{IN2BAT} threshold, otherwise it is off. Bypass PVL with a $1\mu F$ ceramic capacitor to GND. Powering external loads from PVL is not recommended.

As shown in Figure 3, AVL is a filtered output from the PVL linear regulator that the MAX8900_ uses to power its internal analog circuits. The filter consists of an internal 12.5Ω resistor and the AVL external bypass capacitor ($0.1\mu F$). This filter creates a 127kHz lowpass filter that cleans the 3.25MHz switching noise from the analog portions of the MAX8900_. Connect a $0.1\mu F$ ceramic capacitor from AVL to GND. Powering external loads with AVL is not recommended.

Charge Status Outputs (3 Pin)

STAT1, STAT2, and STAT3 are open-drain outputs that indicate the status of the MAX8900B/MAX8900C as shown in Table 3.

When the status outputs are used to communicate with a μP , pull them up to the system logic voltage (V_{LOGIC}) to create a signal that has a logic-high and logic-low state that the μP can easily interpret (Figure 2). Since more than one status signal may change when the MAX8900B/MAX8900C changes states, the μP must implement a deglitching routine for the interpretation of the status signals.

Table 3. 3-Pin Status Output Truth Table

| STAT1 | STAT2 | STAT3 | INDICATION |
|-------|-------|-------|---|
| 0 | 0 | 0 | Battery cold ($THM < T1$) |
| 0 | 0 | 1 | $V_{IN} > V_{OVLO}$ |
| 0 | 1 | 0 | Charging (dead-battery state or dead battery + prequalification state or prequalification state or fast-charge state) |
| 0 | 1 | 1 | Battery hot ($THM > T4$) |
| 1 | 0 | 0 | Done state |
| 1 | 0 | 1 | Undefined. This state does not occur. |
| 1 | 1 | 0 | Timer fault |
| 1 | 1 | 1 | $V_{IN} < V_{UVLO}$ or $\overline{CEN} = 1$ or $V_{IN} < (V_{BAT} + V_{IN2BAT})$ or thermal shutdown |

Note: STAT1, STAT2, and STAT3 are open-drain outputs. "0" indicates that the output device is pulling low. "1" indicates that the output is high impedance.

When the status outputs are used to drive LED indicators, a series resistor should limit the LED current to be less than 30mA (Figure 1). The STAT1 and STAT2 typical pull-down resistance is 25Ω and the absolute maximum rating is +30V. This +30V rating allows I_N to be used to bias STAT1 and STAT2. The STAT3 typical pulldown resistance is 10Ω and the absolute maximum rating is +6V.

Charge Status Outputs (2 Pin + > T4)

STAT1 and STAT2 are open-drain outputs that indicate the status of the MAX8900A as shown in Table 4.

When the status outputs are used to communicate with a μP , pull them up to the system logic voltage (V_{LOGIC}) to create a signal that has a logic-high and logic-low state that the μP can easily interpret (Figure 2). Since more than one status signal may change when the MAX8900A changes states, the μP must implement a deglitching routine for the interpretation of the status signals.

When the status outputs are used to drive LED indicators, a series resistor should limit the LED current to be less than 30mA (Figure 1). Note that the STAT1 and STAT2 typical pulldown resistance is 25Ω and the absolute maximum rating is +30V. This +30V rating allows I_N to be used to bias STAT1 and STAT2.

STAT3 pulls low when the battery temperature monitor detects that the battery temperature is greater than the T4 threshold, otherwise, STAT3 is high impedance. Some systems may want to reduce the battery loading when STAT3 pulls low to prevent the battery from getting excessively hot.

Table 4. 2-Pin Status Output Truth Table

| STAT1 | STAT2 | INDICATION |
|-------|-------|---|
| 0 | 0 | Undefined. This does not occur when the MAX8900_ is powered. |
| 0 | 1 | Charging (dead-battery state or dead battery + prequalification state or prequalification state or fast-charge state) |
| 1 | 0 | Timer fault or $V_{IN} > V_{OVLO}$ or battery cold ($THM < T1$) or battery hot ($THM > T4$) |
| 1 | 1 | Done state or $\overline{CEN} = 1$ or $V_{IN} < V_{UVLO}$ or $V_{IN} < (V_{BAT} + V_{IN2BAT})$ or thermal shutdown |

Note: STAT1 and STAT2 are open-drain outputs. "0" indicates that the output device is pulling low. "1" indicates that the output is high impedance.

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

Inductor Selection

Consider inductance, current rating, series resistance, physical size, and cost when selecting an inductor. These factors affect the converter's efficiency, maximum output current, transient response time, and output voltage ripple. Tables 5 and 6 show suggested inductor values based upon input voltage and laboratory tests.

When using the MAX8900_ with IN voltages below 8.5V, select the inductor to be 1.0 μ H. This keeps the inductor peak-to-peak ripple current to the average DC inductor current at the full load (LIR) between 40% to 50%. If a lower ripple is desired, select an inductance from 2.2 μ H

to 10 μ H. Higher input voltages require higher inductors to maintain the same inductor current ripple.

The trade-off between inductor size and converter efficiency for step-down regulators varies as the LIR varies. LIR is the ratio of the inductor peak-to-peak ripple current to the average DC inductor current at the full-load current. A higher LIR value allows for smaller inductance, but result in higher losses and higher output voltage ripple. To reduce the power dissipation and improve transient response, choose an inductor that has a low DC series resistance as well as a low AC resistance at 3.25MHz.

Note that it is typical for low inductance inductors such as 1 μ H to have a $\pm 30\%$ initial variation in inductance. Furthermore, some physically smaller inductors show a substantial degradation in inductance with increased DC current. It is typical for inductor manufacturers to specify their saturation current at the level when the initial inductance decreases by 30% or at the level where the internal inductor temperature rises +40°C above the ambient temperature. Because of differences in the way inductor manufacturers specify saturation current (ISAT), it is critical that you study and understand your manufacturer's specification criteria.

Table 5. Recommended Inductor Selection

| DC INPUT VOLTAGE RANGE (V) | RECOMMENDED INDUCTOR FOR 40% LIR |
|----------------------------|---|
| 3.4 to 8.7 | 1 μ H inductor, LQM2HPN1R0G0, Murata, 2.5mm x 2.0mm x 0.9mm, 55m Ω , 1.6A. |
| 8.7 to 15.8 | 1.5 μ H inductor, LQM2HPN1R5G0, Murata, 2.5mm x 2.0mm x 0.9mm, 70m Ω , 1.5A |
| 15.8 to 27.4 | 2.2 μ H inductor, LQM2HPN2R2G0, Murata, 2.5mm x 2.0mm x 0.9mm, 80m Ω , 1.3A. |

Table 6. Recommended Inductor

| MANUFACTURER | SERIES | INDUCTANCE (μ H) | ESR (Ω) | CURRENT RATINGS (A) | DIMENSIONS |
|--------------|------------|-----------------------|------------------|---------------------|---------------------------------------|
| Coilcraft | EPL2014 | 1.0 | 0.059 | 1.68 | 2.0 x 2.0 x 1.4 = 5.6mm ³ |
| | | 1.5 | 0.075 | 1.60 | |
| | | 2.2 | 0.120 | 1.30 | |
| Murata | LQM2MPN_G0 | 1.0 | 0.085 | 1.40 | 2.0 x 1.6 x 0.9 = 2.88mm ³ |
| | | 1.5 | 0.110 | 1.20 | |
| | | 2.2 | 0.110 | 1.20 | |
| | | 3.3 | 0.120 | 1.20 | |
| | LQM2HPN_G0 | 1.0 | 0.055 | 1.60 | 2.5 x 2.0 x 0.9 = 4.5mm ³ |
| | | 1.5 | 0.070 | 1.50 | |
| | | 2.2 | 0.080 | 1.30 | |
| TDK | MLP2520S | 1.0 | 0.060 | 1.50 | 2.0 x 2.5 x 1.0 = 5mm ³ |
| | | 1.5 | 0.070 | 1.50 | |
| | CPL2512 | 1.0 | 0.090 | 1.20 | 2.5 x 1.5 x 1.2 = 3.6mm ³ |
| | | 2.2 | 0.135 | 0.90 | |
| | | 1.0 | 0.110 | 1.20 | |
| TOKO | MDT2520-CH | 1.5 | 0.140 | 1.10 | 2.5 x 2.0 x 1.0 = 5mm ³ |
| | | 2.2 | 0.16 | 1.05 | |
| | | 1.0 | 0.085 | 1.35 | |
| | MDT2520-CN | 1.5 | 0.095 | 1.25 | 2.5 x 2.0 x 1.2 = 6mm ³ |
| | | 2.2 | 0.105 | 1.20 | |
| | | 3.3 | 0.115 | 1.15 | |
| | | 1.0 | 0.115 | 1.15 | |

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

If the input voltage approaches the BAT voltage during fast-charge constant current state, the maximum current is no longer limited by the current loop, but by the dropout resistance. The total dropout resistance is:

$$R_{\text{DROPOUT}} = R_{\text{IN2INBP}} + R_{\text{HS}} + R_{\text{L}} + R_{\text{SNS}} = 0.120\Omega + 0.100\Omega + R_{\text{L}} + 0.040\Omega$$

R_{DROPOUT} heavily depends upon the inductor ESR (R_{L}). A low R_{L} is required to maximize performance.

BAT Capacitor

Choose the nominal BAT capacitance to be 2.2μF. The BAT capacitor is required to keep the BAT voltage ripple small and to ensure regulation loop stability. The BAT capacitor must have low impedance at the switching frequency. Ceramic capacitors with X5R or X7R dielectric are highly recommended due to their small size, low ESR, and small temperature coefficients. For optimum load-transient performance and very low output voltage ripple, the BAT capacitor value can be increased above 2.2μF.

As the case sizes of ceramic surface-mount capacitors decreases, their capacitance vs. DC bias voltage characteristic becomes poor. Due to this characteristic, it is possible for 0603 capacitors to perform well while 0402 capacitors of the same value perform poorly. The MAX8900_ require a nominal BAT capacitance of 2.2μF, however, after initial tolerance, bias voltage, aging, and temperature derating, the capacitance must be greater than 1.5μF. With the capacitor technology that is available at the time the MAX8900_ was released to production, the BAT capacitance is best achieved with a single ceramic capacitor (X5R or X7R) in an 0603 or 0805 case size. The capacitor voltage ratings should be 6.3V or greater.

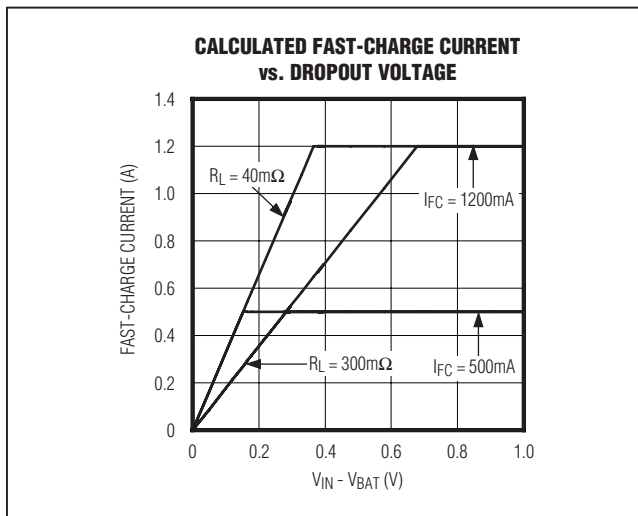


Figure 13. Calculated Fast-Charge Current vs. Dropout Voltage

INBP Capacitor

Choose the INBP capacitance (C_{INBP}) to be 0.47μF. Larger values of C_{INBP} improve the decoupling for the DC-DC step-down converter, but they cause a larger IN to INBP inrush current when the input adapter is connected. To limit the IN inrush current (I_{IN}) to the 2.4A maximum (see the *Absolute Maximum Ratings* section), limit C_{INBP} by the maximum input voltage slew rate (V_{INSR}) on IN: $C_{\text{INBP}} < 2.4\text{A}/V_{\text{INSR}}$.

C_{INBP} reduces the current peaks drawn from the battery or input power source during switch-mode operation and reduces switching noise in the MAX8900_. The impedance of the input capacitor at the switching frequency should be very low. Ceramic capacitors with X5R or X7R dielectric are highly recommended due to their small size, low ESR, and small temperature coefficients. For optimum noise immunity and low input voltage ripple, the input capacitor value can be increased. To fully utilize the ±22V input capability of the MAX8900_, the INBP capacitor voltage rating must be 25V or greater. Note that if V_{IN} falls below V_{BAT} , V_{INBP} remains at the V_{BAT} potential (i.e., a -20V at IN does not pull down INBP). Because V_{INBP} never goes negative, it is possible to use a polarized capacitor (Maxim recommends a ceramic capacitor).

INBP is a critical discontinuous current path that requires careful bypassing. In the PCB layout, place C_{INBP} as close as possible to the power pins (INBP and PGND) to minimize parasitic inductance. If making connections to the INBP capacitor through vias, ensure that the vias are rated for the expected input current so they do not contribute excess inductance and resistance between the bypass capacitor and the power pins. The expected INBP current is the same as the I_{SAT} (see the *Inductor Selection* section). See the *PCB Layout* section for more details.

The input capacitor must meet the input ripple current requirement imposed by the step-down converter. Ceramic capacitors are preferred due to their low ESR and resilience to surge currents. Choose the INBP capacitor so that its temperature rise due to ripple-current does not exceed approximately $T_{\text{A}} = +10^{\circ}\text{C}$. For a step-down regulator, the maximum input ripple current is half of the output current. This maximum input ripple current occurs when the step-down converter operates as 50% duty cycle ($V_{\text{IN}} = 2 \times V_{\text{BAT}}$).

Other Capacitors

The minimum IN capacitor (C_{IN}) is 0.47μF with a voltage rating of 25V or greater. Note that although the MAX8900_ needs only 0.47μF, larger capacitors can be used. Some specifications from USB-IF require a 2.2μF capacitor to have proper handshaking during OTG operation. The BST

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

capacitor (CBST) is a 0.1µF with a voltage rating of 10V or greater. If CBST is increased then maintain a ratio of less than 1:10 between CBST and CPVL. CBST stores charge to drive the high-side n-channel gate. The minimum AVL capacitor is 0.1µF with a voltage rating of 6.3V. The minimum PVL capacitor is 1.0µF with a voltage rating of 6.3V. Ceramic capacitors with X5R or X7R dielectric are highly recommended due to their small size, low ESR, and small temperature coefficients.

Applications Information

Dynamic Charge Current Programming

Certain applications require dynamic programming of the charge current. For example, if the input supply is a USB source, then the system might need to adjust the charge current to support the 100mA and 500mA input current ratings dictated by the USB-IF. Figure 2 illustrates one approach to dynamically program the charge current. By driving the gates of two MOSFET switches to logic-high or logic-low, a microprocessor (µP) connects or disconnects different program resistors. This method allows for four different charge current values ranging from 95mA to 1187mA. When a MOSFET is turned on, its associated resistor is connected to SET1. As resistors are added in parallel, the total resistance from SET1 to ground decreases, which causes IFC to increase.

In the particular example of a USB input, the circuit of Figure 2 could be leveraged as follows: When a VBUS connect event is detected, the µP can immediately initiate the USB 100mA current mode by setting GPIO[6:4] = 0b000. After the USB transceiver has enumerated with 500mA permission, the µP can initiate the USB 500mA current mode by setting GPIO[6:4] = 0b010. If the USB transceiver detects that a USB suspend is needed, then the µP can reduce the input current to 40µA by setting GPIO[6:4] = 0b001. Alternatively, it is possible that after the VBUS connect event that the USB transceiver determines that there is a dedicated USB wall charger (D+ and D- shorted together) and then the µP can set the charge current to the full capability of the MAX8900_ (1.2A) by setting GPIO[6:4] = 0b110.

No-Battery Operation

No-battery operation may be necessary in the application and/or end-of-line testing during production. The MAX8900_ can operate a system without a battery as long as the following conditions are satisfied:

- The system must not draw load currents that are greater than IFC.
- The system must not draw load currents that are greater than IPQ when the battery is less than VPQUTH.
- The thermistor node (THM) must be satisfied. Note that if the thermistor is in the battery pack and the pack is removed, the MAX8900_ THM node voltage goes high and disables the charger. If the MAX8900_ is expected to deliver charge without a battery then VTHM must be forced to AVL/2.
- The battery node should have enough capacitance to hold the battery voltage to some minimum acceptable system value (VSYSTRST) during the done-to-fast-charge state transition time of 100µs (tDONE2FC).

$$C_{BAT} \geq I_{LOAD} \times \frac{t_{DONE2FC}}{V_{BATREG} - V_{SYSTRST}}$$

For example, if the maximum system load without a battery could be 300mA (ILOAD) and the minimum acceptable system voltage is 3.4V (VSYSTRST), then the battery node should have at least 37.5µF.

$$C_{BAT} \geq 300mA \times \frac{100\mu s}{4.2V - 3.4V} = 37.5\mu F$$

Charge-Source Issues

A battery charger's input is typically very accessible to the end-user (i.e., available on a connector) and can potentially be exposed to very harsh conditions. The MAX8900_ provides for high-reliability solution that can survive harsh conditions seen on its input.

Charge-Source Impedance

Charge source impedance can vary due to quality of the charge source and the associated connectors. The MAX8900_ operates very nicely with input impedance up to 1Ω. When high input impedances cause the input voltage to drop, the MAX8900_ simply reduces the charge current to a sustainable level and tries to put as much energy into the battery as possible. If the input voltage falls within the VIN2BAT threshold of the battery voltage, the MAX8900_ shuts down to prevent any current flowing from the battery back to the charger source. The MAX8900_ does not suffer from the self-oscillation problems that plague other chargers when exposed to high-impedance sources.

Inductive Kick

Often the input source has long leads connecting to the MAX8900_, which, during connection and disconnect, can cause voltage spikes. The lead inductance and the input capacitor create an LC tank circuit. In the event that the LC tank circuit has a high Q (i.e., low series

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

impedance), the voltage spike could be twice that of the nominal source voltage. In other words, a 6V source with a high-Q LC tank circuit in the cabling can result in a voltage spike as high as 12V. The MAX8900_'s high input absolute maximum voltage rating of +22V to -22V eliminates any concerns about the voltage spikes due to inductive kicking for many applications.

In the event that an application may see a high-Q LC tank circuit in the cabling for a supply that is > +11V, a resistor (R_{IN}) must be added in series with C_{IN} to reduce the Q of the tank circuit. The resistor value can be found experimentally by assuming the parasitic inductance (L_{PAR}) of the input cabling is 1μH/m, then use the following equation give a good starting value for R_{IN} :

$$R_{IN} = 2 \times \sqrt{\frac{L_{PAR}}{C_{IN}}}$$

An alternative method for estimating L_{PAR} is to measure the frequency of the input voltage spike ringing and then calculate L_{PAR} from the following equation.

$$L_{PAR} = \frac{1}{(2 \times \pi \times f_R) \times C_{IN}}$$

Overvoltage and Reverse Input Voltage Protection

The MAX8900_ provides for a +22V absolute maximum positive input voltage and a -22V absolute maximum negative input voltage. Excursions to the absolute maximum voltage levels should be on a transient basis only, but can be withstood by the MAX8900_ indefinitely.

Situations that typically require extended input voltage ratings include but are not limited to the following:

- Inductive kick
- Charge source failure
- Power surge
- Improperly wired wall adapter
- Improperly set universal wall adapter
- Wall adapter with the correct plug, but wrong voltage
- Home-built computer with USB wiring harness connected backwards (negative voltage)
- USB connector failure
- Excessive ripple voltage on a switch-mode wall charger

- USB powered hub that is powered by a wall charger (typically through a barrel connector) that has any of the aforementioned issues
- Unregulated charger (passively regulated by the turns ratio of the magnetic's turns ratio)
- Automotive environment (9V, 12V, any of the aforementioned in reverse).

PCB Layout

The MAX8900_ WLP package and bump configuration allows for a small-size low-cost PCB design. Figures 3 and 14 show that the MAX8900_ package's 30 bumps are combined into 18 functional nodes. The bump configuration places all like nodes adjacent to each other to minimize the area required for routing. The bump configuration also allows for a layout that does not use any vias within the WLP bump matrix (i.e., no micro vias). To utilize this no via layout, C_{EN} is left unconnected and the STAT3 pin is not used (2-pin status version).

Figure 15 shows the recommended land pattern for the MAX8900_. Figure 16 shows the cross section of the MAX8900_'s bump with detail of the under-bump metal (UBM). The diameter of each pad in the land pattern is close to the diameter of the UBM. This land pattern to UBM relationship is important to get the proper reflow of each solder bump.

Underfill is not necessary for the MAX8900_'s package to pass the JESD22-B111 Board Level Drop Test Method for Handheld Electronic Products. JESD22-B111 covers end applications such as cell phones, PDAs, cameras, and other products that are more prone to being dropped during their lifetime due to their size and weight. Please consider using underfill for applications that require higher reliability than what is covered in the JESD22-B111 standard.

Careful printed circuit layout is important for minimizing ground bounce and noise. Figure 14 is an example layout of the critical power components for the MAX8900_. The arrangement of the components that are not shown in Figure 14 is less critical. Refer to the MAX8900 Evaluation Kit for a complete PCB layout example. Use the following list of guidelines in addition to Application Note 1891: *Wafer-Level Packaging (WLP) and Its Applications* (www.maxim-ic.com/ucsp) to layout the MAX8900_ PCB.

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

The guidelines at the top are the most critical:

- 1) When the step-down converter's high-side MOSFET turns on, C_{INBP} delivers a high di/dt current pulse to INBP. Because of this high di/dt current pulse, place C_{INBP} close to INBP to minimize the parasitic impedance in the PCB trace.
- 2) When the step-down converter is increasing the current in the inductor, the high-side MOSFET is on and current flows in the following path: from C_{INBP} into INBP >> out of LX >> through the inductor >> into CS >> out of BAT >> through C_{BAT} and back to C_{INBP} through the ground plane. This current loop should be kept small and the electrical length from the positive terminal of C_{INBP} to INBP should be kept short to minimize parasitic impedance. The electrical length from the negative terminal of C_{BAT} to the negative terminal of C_{INBP} should be short to minimize parasitic impedance. Keep all sensitive signals such as feedback nodes or audio lines outside of this current loop with as much isolation as your design allows.
- 3) When the step-down converter is decreasing the inductor current, the low-side MOSFET is on and the current flows in the following path: out of LX >> through the inductor >> into CS >> out of BAT >> through C_{BAT} >> into PGND >> out of LX again. This current loop should be kept small and the electrical length from the negative terminal of C_{BAT} to PGND should be short to minimize parasitic impedance. Keep all sensitive signals such as feedback nodes or audio lines outside of this current loop with as much isolation as your design allows.
- 4) The LX node voltage switches between INBP and PGND during the operation of the step-down converter. Minimize the stray capacitance on the LX node to maintain good efficiency. Also, keep all sensitive signals such as feedback nodes or audio lines away from LX with as much isolation as your design allows.
- 5) In Figure 14, the CS node is connected to the second layer of metal with vias. Use low-impedance vias that are capable of handling 1.5A of current. Also, keep the routing inductor current path on layer 2 just underneath the inductor current path on layer 1 to minimize impedance.

- 6) Both C_{BST} and C_{PVL} deliver current pulses for the MAX8900's MOSFET drivers. These components should be placed as shown in Figure 14 to minimize parasitic impedance.
- 7) Each of the MAX8900_ bumps has approximately the same ability to remove heat from the die. Connect as much metal as possible to each bump to minimize the θ_{JA} associated with the MAX8900_. See the *Thermal Management* section for more information on θ_{JA} .

In Figure 14, many of the top layer bump pads are connected together in top metal. When connecting bumps together with top layer metal, the solder mask must define the pads from $180\mu\text{m}$ to $210\mu\text{m}$ as shown in Figure 15. When using solder mask defined pads, please double check the solder mask openings on the PCB Gerber files before ordering boards as some PCB layout tools have configuration settings that automatically oversize solder mask openings. Also, explain in the PCB fabrication notes that the solder mask is not to be modified. Occasionally, optimization tools are used at the PCB fabrication house that modify solder masks. Layouts that do not use solder mask defined pads are possible. When using these layouts, adhere to the recommendations A through G above.

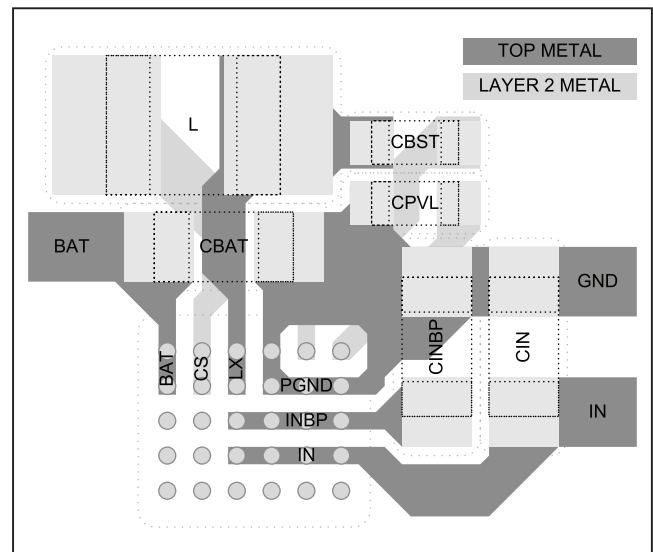


Figure 14. Power PCB Layout Example

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

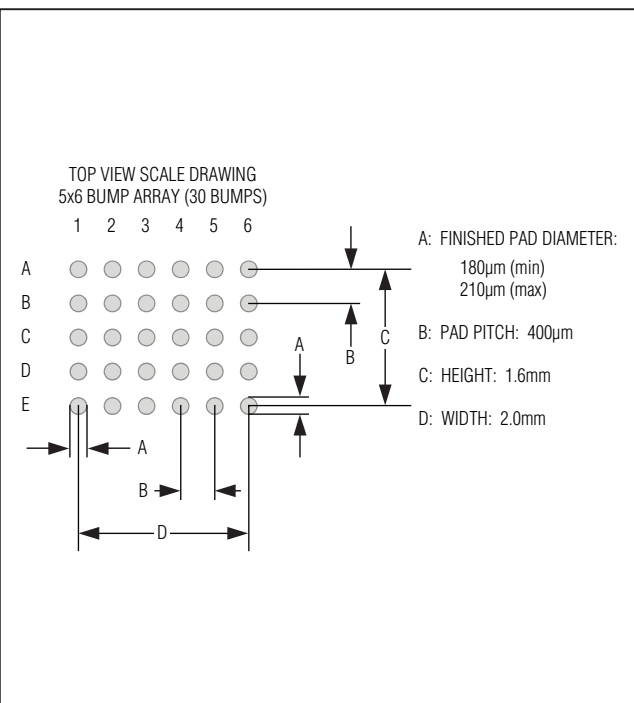


Figure 15. Recommended Land Pattern

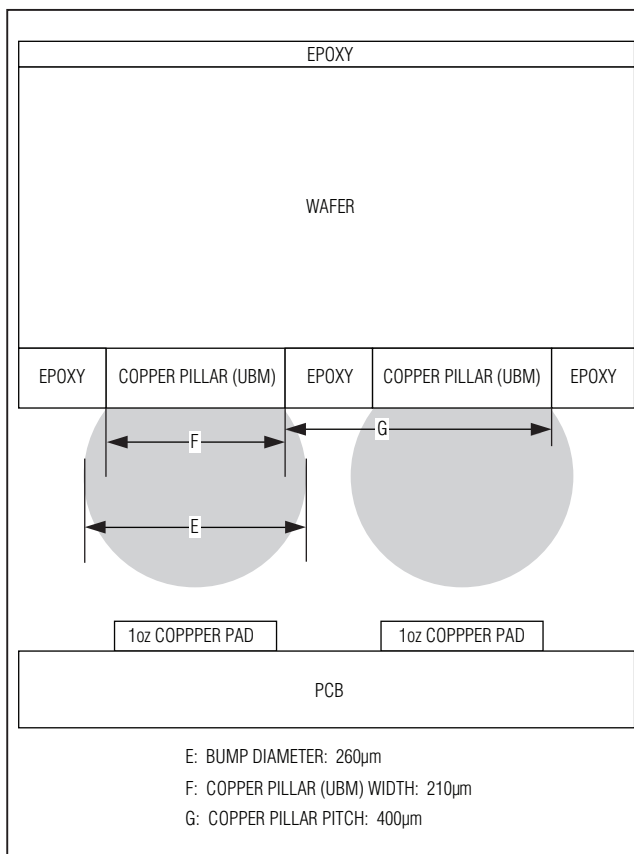


Figure 16. Bump Cross Section and Copper Pillar Detail

MAX8900A/MAX8900B/MAX8900C

Ordering Information (continued)

| PART | TEMP RANGE | PIN-PACKAGE | OPTIONS |
|---------------|----------------|-------------|--|
| MAX8900CEWV+T | -40°C to +85°C | 30 WLP | V _{OVLO} = 6.5V T ₁ = 0°C 3-pin status indicators V _{PQUTH} = 3.0V |

+Denotes a lead(Pb)-free/RoHS-compliant package.
T = Tape and reel.

Chip Information

PROCESS: BiCMOS

1.2A Switch-Mode Li+ Chargers with ±22V Input Rating and JEITA Battery Temperature Monitoring

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO. | LAND PATTERN NO. |
|--------------|--------------|-------------------------|--|
| 30 WLP | W302A2+1 | 21-0211 | Refer to Application Note 1891 |

COMMON DIMENSIONS

| | |
|----|-------------|
| A | 0.64±0.05 |
| A1 | 0.21±0.03 |
| A2 | 0.43 REF |
| A3 | 0.025 BASIC |
| b | ∅0.26±0.03 |
| D1 | 1.60 |
| E1 | 2.00 |
| e | 0.40 BASIC |
| SD | 0.00 BASIC |
| SE | 0.20 BASIC |

| PKG. CODE | E | | D | | DEPOPULATED BUMPS |
|-----------|------|------|------|------|-------------------|
| | MIN | MAX | MIN | MAX | |
| W302A2+1 | 2.61 | 2.73 | 2.31 | 2.44 | NONE |
| W302A2+2 | 2.36 | 2.57 | 1.96 | 2.16 | NONE |
| W302A2+3 | 2.57 | 2.77 | 2.16 | 2.36 | NONE |
| W302B2+1 | 2.42 | 2.54 | 2.32 | 2.44 | NONE |

NOTES:

- Terminal pitch is defined by terminal center to center value.
- Outer dimension is defined by center lines between scribe lines.
- All dimensions in millimeters.
- Marking shown is for package orientation reference only.
- Tolerance is ± 0.02mm unless specified otherwise.
- All dimensions apply to PbFree (+) package codes only.
- Front-side finish can be either Black or Clear.

—DRAWING NOT TO SCALE—

MAXIM

TITLE:
PACKAGE OUTLINE
30 BUMPS, WLP PKG. 0.4mm PITCH

| | | | |
|----------|---------------------------------|-----------|-----|
| APPROVAL | DOCUMENT CONTROL NO. 21-0211 | REV. D | 1/1 |
|----------|---------------------------------|-----------|-----|

1.2A Switch-Mode Li+ Chargers with $\pm 22V$ Input Rating and JEITA Battery Temperature Monitoring

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|-----------------------------|
| 0 | 1/10 | Initial release | — |
| 1 | 3/10 | Corrected various items | 1, 4, 5, 15, 30 |
| 2 | 8/10 | Updated Figures 2, 3, 7, and 8 and related text to indicate the charge timer applies to the dead-battery state and corrected other various errors | 6,14, 15, 16, 20–22, 27, 31 |
| 3 | 1/11 | Added MAX8900C to data sheet | 1–35 |

MAX8900A/MAX8900B/MAX8900C

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 _____ 35