


20 Amp Schottky Barrier Rectifiers

FST2080 — FST2090

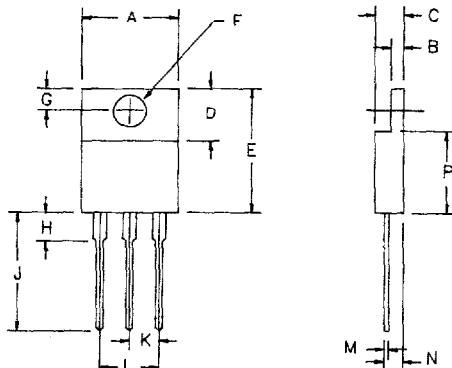

Dim.	Millimeter					
	Inches	Minimum	Maximum	Minimum	Maximum	Notes
A	.390	.390	.415	9.90	10.5	
B	.050	.050	.055	1.27	1.40	
C	.180	.180	.185	4.57	4.70	
D	.248	.248	.260	6.30	6.60	
E	.590	.590	.605	14.98	15.40	
F	.145	.145	.150	3.68	3.81	Dia.
G	.108	.108	.120	2.74	3.05	
H	.163	.163	.170	4.14	4.32	
J	.540	.540	.570	13.72	14.5	
K	.087	.087	.091	2.20	2.31	
L	.200	.200	.205	5.08	5.21	
M	.021	.021	.025	.533	.635	
N	.125	.125	.140	3.18	3.56	
P	.335	.335	.342	8.50	8.69	

PLASTIC TO220

Microsemi Catalog
Number

Repetitive Peak
Reverse Voltage

Transient Peak
Reverse Voltage

FST2080
FST2090

80V

90V

80V

90V

- Schottky barrier rectifier
- Guard ring for reverse protection
- Low power loss, high efficiency
- High surge capacity
- V_{RRM} 80 to 90 Volts

Electrical Characteristics

Average Forward Current per pkg.

$I_{F(AV)}$ 20 Amps

$T_C = 132^\circ\text{C}$, Square wave, $R_{\theta JC} = 2.8^\circ\text{C}/\text{W}$

Average Forward Current per leg

$I_{F(AV)}$ 10 Amps

$T_C = 132^\circ\text{C}$, Square wave, $R_{\theta JC} = 5.6^\circ\text{C}/\text{W}$

Maximum Surge Current per leg

I_{FSM} 500 Amps

0.3ms, half sine, $T_J = 175^\circ\text{C}$

Max. Peak Forward Voltage per leg

V_{FM} .62 Volts

$|FM = 10A, T_J = 175^\circ\text{C}$ *

Max. Peak Forward Voltage per leg

V_{FM} .80 Volts

$|FM = 10A, T_J = 25^\circ\text{C}$ *

Max. Peak Reverse Current per leg

I_{RM} 10 mA

$V_{RRM}, T_J = 125^\circ\text{C}$ *

Max. Peak Reverse Current per leg

I_{RM} 250 μ A

$V_{RRM}, T_J = 25^\circ\text{C}$

Typical Junction Capacitance

C_J 440 pF

$VR = 5.0V, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 usec. Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range

T_{S1G}

-40°C to + 175°C

Operating junction temp range

T_J

-40°C to + 175°C

Max thermal resistance per leg

$R_{\theta JC}$

5.6°C/W

Max thermal resistance per pkg.

$R_{\theta JC}$

2.8°C/W

Typical thermal resistance per leg

$R_{\theta JC}$

4.7°C/W

Mounting torque

15 inch pounds maximum (6-32 screw)

Typical Weight

.08 ounces (2.3 grams) typical

FST2080 - FST2090

C

Figure 1
Typical Forward Characteristics - Per Leg

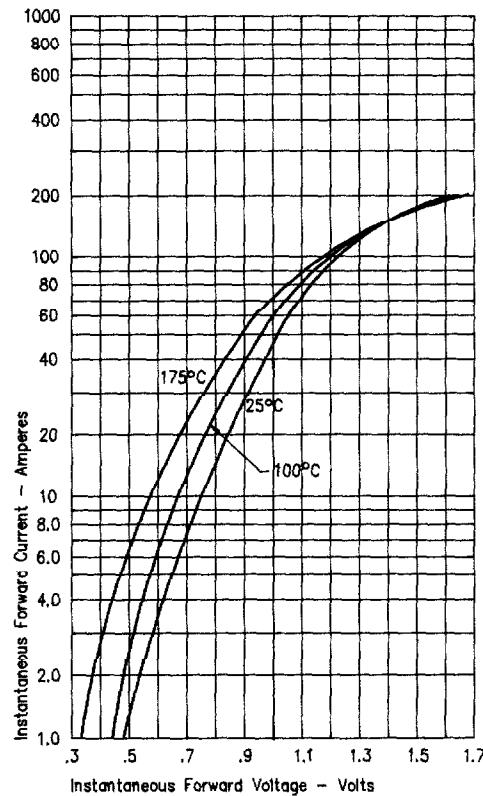


Figure 3
Typical Junction Capacitance - Per Leg

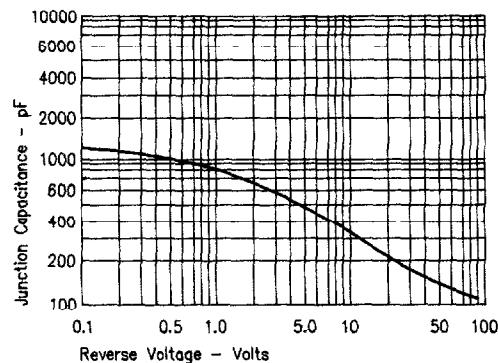


Figure 4
Forward Current Derating - Per Leg

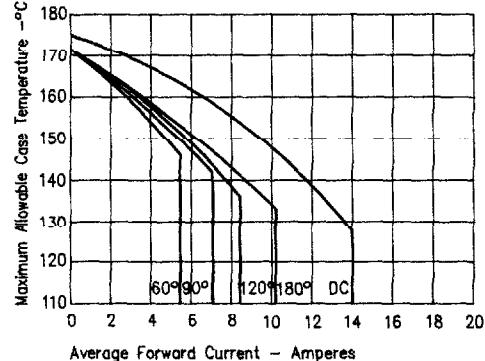


Figure 2
Typical Reverse Characteristics - Per Leg

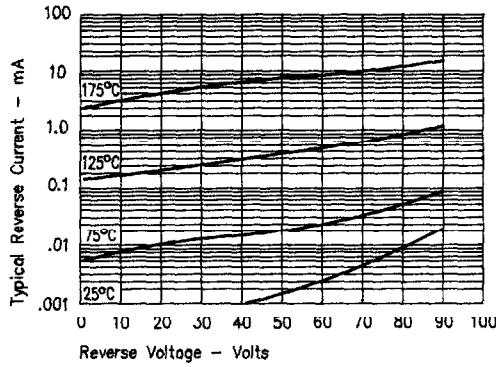


Figure 5
Maximum Forward Power Dissipation - Per Leg

