


Schottky PowerMod CPT50080, CPT50090

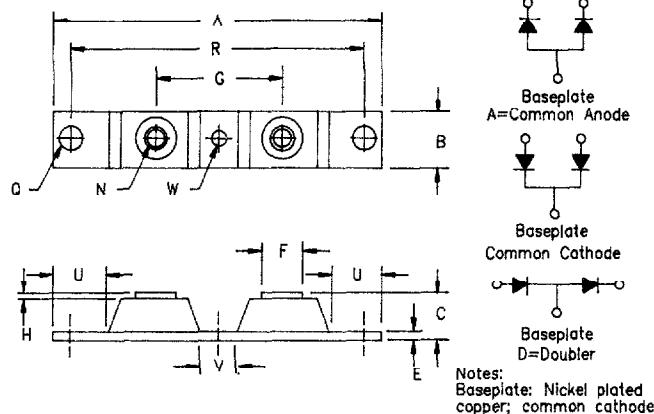

Dim. Inches		Millimeters		
Min.	Max.	Min.	Max.	Notes
A	---	3.630	---	92.20
B	0.700	0.800	17.78	20.32
C	---	0.630	---	16.00
E	0.120	0.130	3.05	3.30
F	0.490	0.510	12.45	12.95
G	1.375	BSC	34.92	BSC
H	0.010	---	0.25	---
N	---	---	---	1/4-20
Q	0.275	0.290	6.00	7.37 Dia.
R	3.150	BSC	80.01	BSC
U	0.600	---	15.24	---
V	0.312	0.340	7.92	8.64
W	0.180	0.195	4.57	4.95 Dia.

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT50080*	80V	80V
CPT50090*	90V	90V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- VRRM 80 to 90 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

Average forward current per pkg	I(F(AV)) 500 Amps	T _C = 120°C, Square wave, R _{θJC} = 0.12°C/W
Average forward current per leg	I(F(AV)) 250 Amps	T _C = 120°C, Square wave, R _{θJC} = 0.24°C/W
Maximum surge current per leg	I(FSM) 5000 Amps	8.3ms, half sine, T _J = 175°C
Maximum repetitive reverse current per leg	I(R(OV)) 2 Amps	f = 1 KHZ, 25°C, 1 μsec square wave
Max peak forward voltage per leg	V(FM) 0.85 Volts	I(FM) = 250A; T _J = 25°C
Max peak forward voltage per leg	V(FM) 0.67 Volts	I(FM) = 250A; T _J = 175°C
Max peak reverse current per leg	I(RM) 200 mA	V(RRM, T _J) = 125°C*
Max peak reverse current per leg	I(RM) 8.0 mA	V(RRM, T _J) = 25°C
Typical junction capacitance	C _J 6400 pF	V _R = 5.0V, T _C = 25°C

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-40°C to 175°C
Operating junction temp range	T _J	-40°C to 175°C
Max thermal resistance	R _{θJC}	0.24°C/W Junction to case
Typical thermal resistance	R _{θCS}	0.08°C/W Case to sink
Terminal Torque		50 inch pounds maximum
Mounting Base Torque (outside holes)		40 inch pounds maximum
Mounting Base Torque (center hole) center hole must be torqued first		10 inch pounds maximum
Weight		2.8 ounces (78.3 grams) typical

**Microsemi Corp.
Colorado**

PH: 303-469-2161
FAX: 303-466-3775

CPT50080, CPT50090

C
██████████

Figure 1
Typical Forward Characteristics - Per Leg

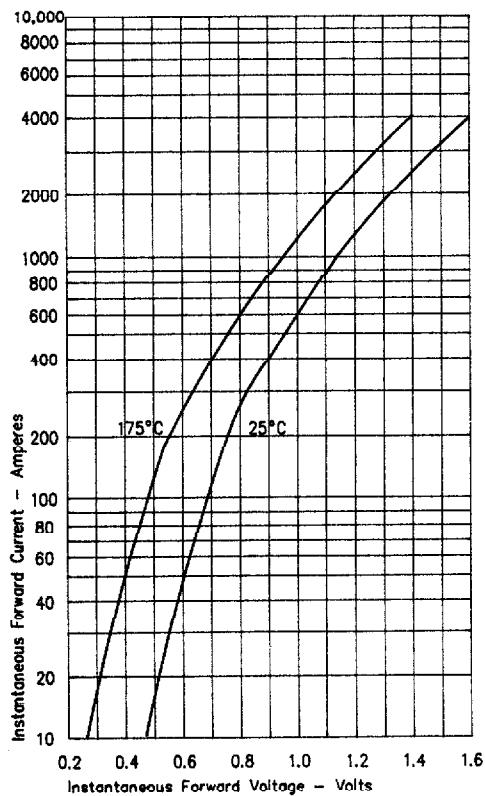


Figure 3
Typical Junction Capacitance - Per Leg

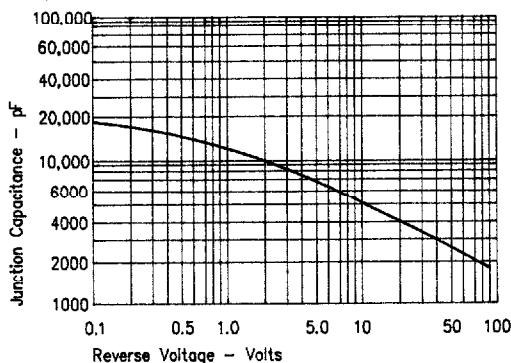


Figure 4
Forward Current Derating - Per Leg

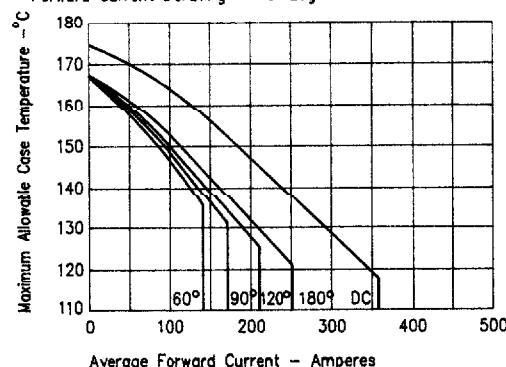


Figure 2
Typical Reverse Characteristics - Per Leg

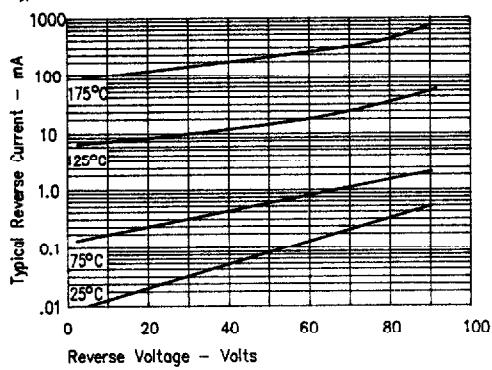


Figure 5
Maximum Forward Power Dissipation - Per Leg

