


# Schottky Powermod FST 160

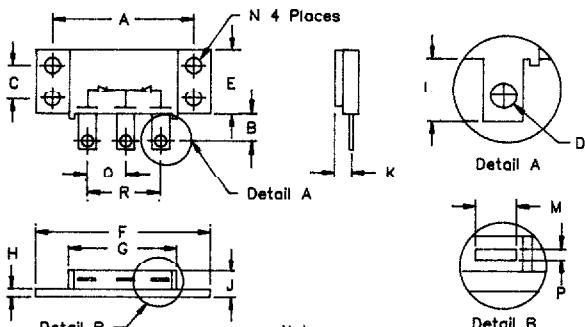

Notes:  
Baseplate: Nickel plated copper;  
electrically isolated  
Pins: Nickel plated copper Center  
terminal: Common Cathode

Dim. Inches		Millimeters		
Min.	Max.	Min.	Max.	Notes
A 1.995	2.005	50.67	50.93	
D 0.300	0.325	7.62	8.26	
C 0.495	0.505	12.57	12.83	
D 0.182	0.192	4.62	4.88	Dia.
E 0.990	1.010	25.15	25.65	
F 2.390	2.410	60.71	61.21	
G 1.490	1.510	37.85	38.35	
H 0.120	0.130	3.05	3.30	
J ---	0.400	---	10.16	
K 0.240	0.260	6.10	6.60 to Lead C	
L 0.490	0.510	12.45	12.95	
M 0.330	0.350	8.38	8.90	
N 0.175	0.195	4.45	4.95	Dia.
P 0.035	0.045	0.89	1.14	
Q 0.445	0.455	11.30	11.56	
R 0.890	0.910	22.61	23.11	

TO-249

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST16035*	35V	35V
FST16040*	40V	40V
FST16045*	45V	45V
FST16050*	50V	50V

\*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- V<sub>RRM</sub> = 35 to 50 Volts
- High Surge Capacity
- Reverse Energy Tested

## Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 160 Amps	T <sub>C</sub> = 115°C, Square wave, R <sub>θJC</sub> = 0.6°C/W
Average forward current per leg	I <sub>F(AV)</sub> 80 Amps	T <sub>C</sub> = 115°C, Square wave, R <sub>θJC</sub> = 1.0°C/W
Maximum surge current per leg	I <sub>FSM</sub> 1200 Amps	8.3 ms, half sine T <sub>J</sub> = 175°C
Max repetitive peak reverse current per leg	I <sub>R(OV)</sub> 2 Amps	f = 1 KHz, 25°C, 1 $\mu$ sec Square wave
Max peak forward voltage per leg	V <sub>FM</sub> .58 Volts	I <sub>FM</sub> = 80A; T <sub>J</sub> = 175°C*
Max peak forward voltage per leg	V <sub>FM</sub> .74 Volts	I <sub>FM</sub> = 80A; T <sub>J</sub> = 25°C*
Max peak reverse current per leg	I <sub>RM</sub> 30 mA	V <sub>RRM</sub> , T <sub>J</sub> = 125°C*
Max peak reverse current per leg	I <sub>RM</sub> 2 mA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Typical reverse current per leg	I <sub>RM</sub> 20 $\mu$ A	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Typical junction capacitance	C <sub>J</sub> 2300 pF	V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300  $\mu$ sec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	T <sub>TSG</sub>	-40°C to 175°C
Operating junction temp range	T <sub>J</sub>	-40°C to 175°C
Maximum thermal resistance per leg per package	R <sub>θJC</sub>	1.0°C/W Junction to case
Typical thermal resistance per leg	R <sub>θJC</sub>	0.6°C/W Junction to case
Typical thermal resistance	R <sub>θJC</sub>	0.9°C/W Junction to case
Mounting torque	R <sub>θCS</sub>	0.1°C/W Case to sink
Weight		15 - 20 inch pounds maximum 2.5 ounces (71 grams) typical

**Microsemi Corp.  
Colorado**

C-194

PH: 303-469-2161  
FAX: 303-466-3775

# FST 160

C

Figure 1  
Typical Forward Characteristics - Per Leg

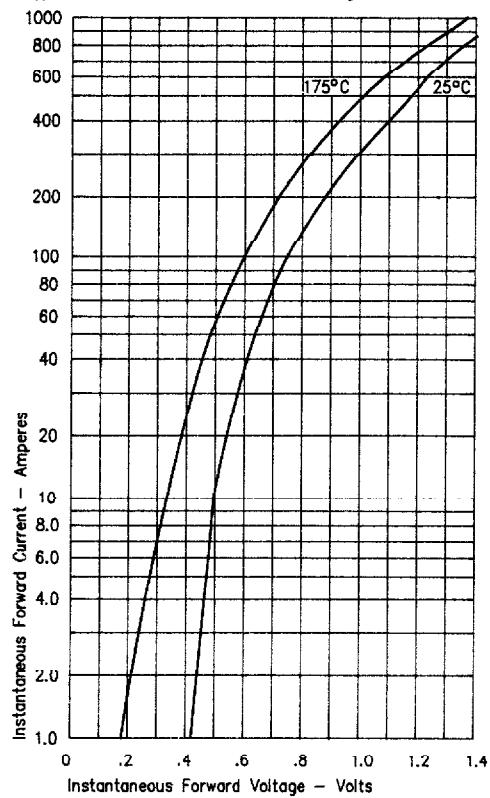


Figure 3  
Typical Junction Capacitance - Per Leg

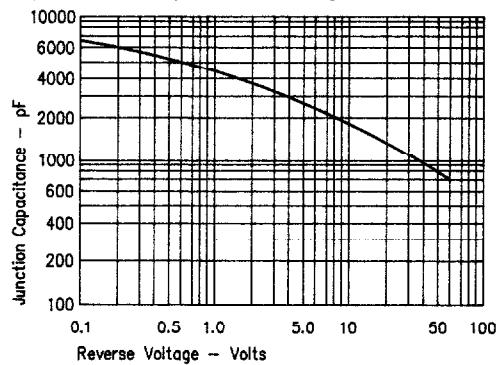


Figure 4  
Forward Current Derating - Per Leg

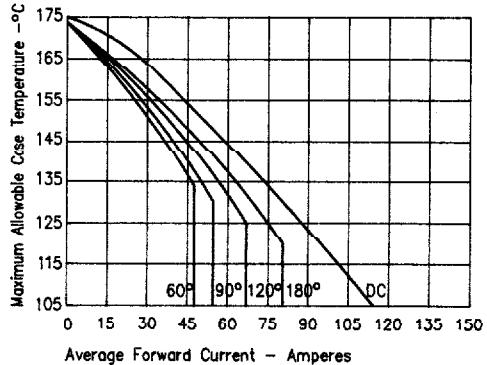


Figure 2  
Typical Reverse Characteristics - Per Leg

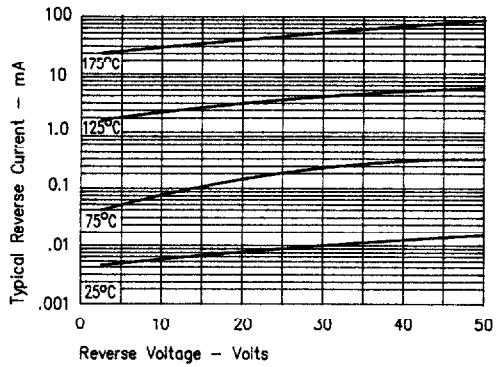


Figure 5  
Maximum Forward Power Dissipation - Per Leg

