



# 3 Amp Schottky Rectifier HSM350, HSM360

C

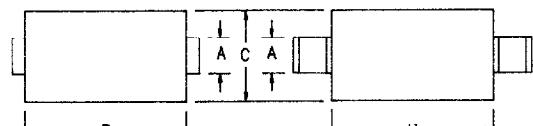


D0214AB

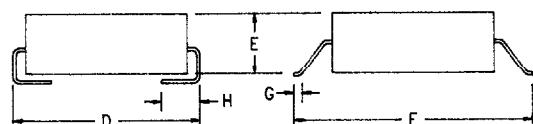

D0215AB

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.117	.123	2.21	2.97	
B	.260	.280	4.57	6.60	
C	.220	.245	3.94	5.58	
D	.307	.322	5.59	7.80	
E	.075	.095	1.90	2.41	
F	.380	.400	6.86	7.37	
G	.025	.040	.381	.762	
H	.030	.060	.760	1.52	

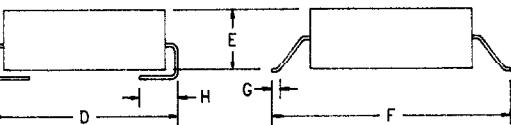

Microsemi  
Catalog Number

Working  
Peak Reverse  
Voltage

Repetitive  
Peak Reverse  
Voltage

HSM350\*  
HSM360\*

50V

60V

50V

60V

- Schottky Barrier Rectifier
- Guard Ring Protection
- VRRM 50 to 60 Volts
- 175°C Junction Temperature

\* Add Suffix J for J Lead or G for Gull Wing Lead Configuration

## Electrical Characteristics

Average forward current	I F(AV) 3.0 Amps	Square wave
Maximum surge current	I FSM 150 Amps	8.3ms, half sine, TJ = 175°C
Max peak forward voltage	V FM .55 Volts	I FM = 1.0A; TJ = 25°C*
Max peak forward voltage	V FM .62 Volts	I FM = 3.0A; TJ = 25°C*
Max peak forward voltage	V FM .79 Volts	I FM = 9.4A; TJ = 25°C*
Max peak reverse current	I RM 100 μA	V RRM, TJ = 25°C
Typical junction capacitance	CJ 215 pF	V R = 5.0V, TJ = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temperature range  
Operating junction temp range

T<sub>STG</sub>  
T<sub>J</sub>

-40°C to 150°C  
-40°C to 150°C

Weight

.008 ounces (.22 grams) typical

# HSM350, HSM360

Figure 1  
Typical Forward Characteristics

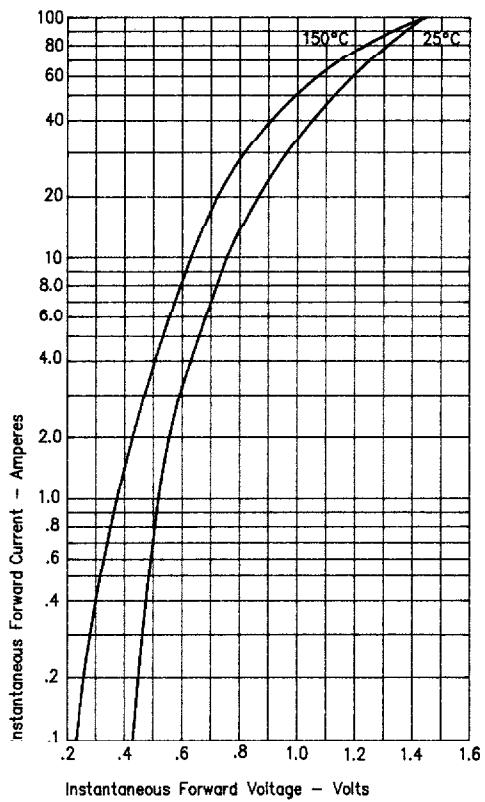


Figure 3  
Typical Junction Capacitance

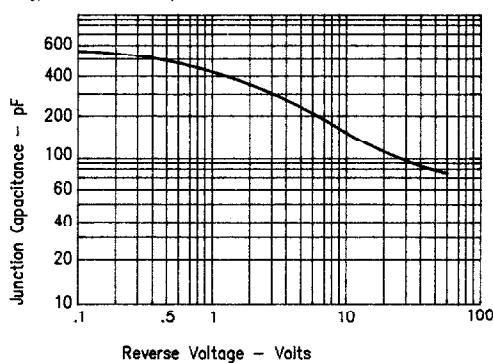


Figure 2  
Typical Reverse Characteristics

