

TOSHIBA

FILE NO. 020-200029

SERVICE MANUAL

COLOR TELEVISION

N0PSP Chassis

43H70, 43HX70

(TAC0070)

(TAC0074)

TABLE OF CONTENTS

CHAPTER 1 GENERAL ADJUSTMENTS

SAFETY INSTRUCTIONS	3
CRT ASSEMBLY REPLACEMENT AND MOUNTING	4
PICTURE TUBE COMPONENTS ADJUSTMENT	6
REPLACEMENT OF THE CRT	8
SERVICE MODE	9
ELECTRICAL ADJUSTMENT	11
CONVERGENCE ADJUSTMENT	13
SCREEN AND MIRROR ALIGNMENTS	17
CIRCUIT CHECKS	18

CHAPTER 2 SPECIFIC INFORMATIONS

SETTING & ADJUSTING DATA	19
LOCATION OF CONTROLS	20
PROGRAMMING CHANNEL MEMORY	22
CIRCUIT BLOCK DIAGRAM	23
MECHANICAL DISASSEMBLY	25
CHASSIS REPLACEMENT PARTS LIST	26
PC BOARDS BOTTOM VIEW	55
TERMINAL VIEW OF TRANSISTORS	68
SPECIFICATIONS	71
APPENDIX:	
CIRCUIT DIAGRAM	

CHAPTER 1 GENERAL ADJUSTMENTS

SAFETY INSTRUCTIONS

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRECAUTION" AND "PRODUCT SAFETY NOTICE" INSTRUCTIONS BELOW.

X-RAY RADIATION PRECAUTION

1. Excessive high voltage can produce potentially hazardous X-RAY RADIATION. To avoid such hazards, the high voltage must not be above the specified limit. The nominal value of the high voltage of this receiver is (A) kV at zero beam current (minimum brightness) under a 120V AC power source. The high voltage must not, under any circumstances, exceed (B) kV.

Refer to table-1 for high voltage (A), (B).
(See SETTING & ADJUSTING DATA on page 19)

Each time a receiver requires servicing, the high voltage should be checked following the HIGH VOLTAGE CHECK procedure in this manual. It is recommended that the reading of the high voltage be recorded as a part of the service record. It is important to use an accurate and reliable high voltage meter.


2. This receiver is equipped with a Fail Safe (FS) circuit which prevents the receiver from producing an excessively high voltage even if the B+ voltage increases abnormally. Each time the receiver is serviced, the FS circuit must be checked to determine that the circuit is properly functioning, following the FS CIRCUIT CHECK procedure in this manual.
3. The only source of X-RAY RADIATION in this TV receiver is the picture tube. For continued X-RAY RADIATION protection, the replacement tube must be exactly the same type tube as specified in the parts list.
4. Some part in this receiver have special safety-related characteristics for X-RAY RADIATION protection. For continued safety, parts replacement should be undertaken only after referring to the PRODUCT SAFETY NOTICE below.

SAFETY PRECAUTION

WARNING : Service should not be attempted by anyone unfamiliar with the necessary precautions on this receiver. The following are the necessary precautions to be observed before servicing this chassis.

1. An isolation Transformer should be connected in the power line between the receiver and the AC line before any service is performed on the receiver.
2. Always discharge the picture tube anode to the CRT conductive coating before handling the picture tube. The picture tube is highly evacuated and if broken, glass fragments will be violently expelled. Use shatter proof goggles and keep picture tube away from the unprotected body while handling.
3. When replacing a chassis in the cabinet, always be certain that all the protective devices are put back in place, such as; non-metallic control knobs, insulating covers, shields, isolation resistor-capacitor network etc.
4. Before returning the set to the customer, always perform an AC leakage current check on the exposed metallic parts of the cabinet, such as antennas, terminals, screwheads, metal overlays, control shafts etc. to be sure the set is safe to operate without danger of electrical shock. Plug the AC line cord directly into a 120V AC outlet (do not use a line isolation transformer during this check). Use an AC voltmeter having 5000 ohms per volt or more sensitivity in the following manner:

Connect a 1500 ohm 10 watt resistor, paralleled by a 0.15 μ F, AC type capacitor, between a known good earth ground (water pipe, conduit, etc.) and the exposed metallic parts, one at a time. Measure the AC voltage across the combination of 1500 ohm resistor and 0.15 μ F capacitor. Reverse the AC plug at the AC outlet and repeat AC voltage measurements for each exposed metallic part. Voltage measured must not exceed 0.3 volts rms. This corresponds to 0.2 milliamp. AC. Any value exceeding this limit constitutes a potential shock hazard and must be corrected immediately.

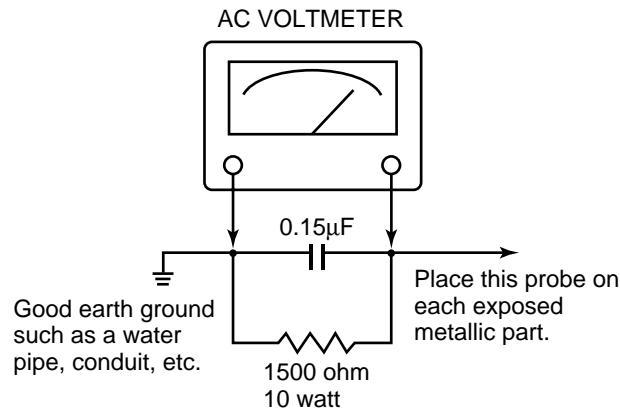


PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These characteristics are often passed unnoticed by a visual inspection and the protection afforded by them cannot necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this manual and its supplements; electrical components having such features are identified by the international hazard symbols on the schematic diagram and the parts list.

Before replacing any of these components, read the parts list in this manual carefully. The use of substitute replacement parts which do not have the same safety characteristics as specified in the parts list may create shock, fire, X-ray radiation or other hazards.


CRT ASSEMBLY REPLACEMENT AND MOUNTING

CAUTION : DO NOT LOOSEN THE HEX HEAD BOLTS WITH SPRINGS (12 PCS), BECAUSE THOSE ARE FOR SEALING OF CRT COOLANT.

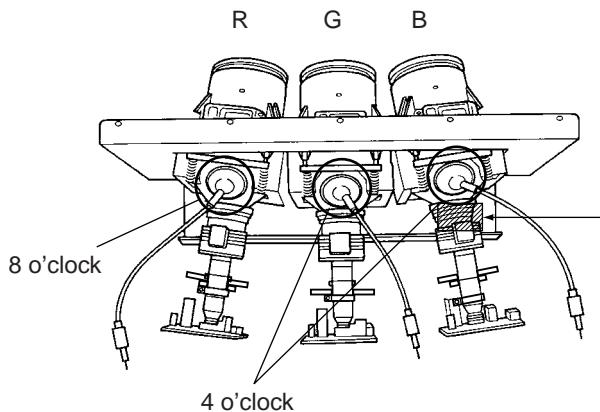

Attention Serviceman

The Hex Head Bolts with Springs. (see sketch) used on CRT assembly, are "NOT" Adjustment Screws
DO NOT LOOSEN-FLUID LEAKAGE WILL OCCUR.

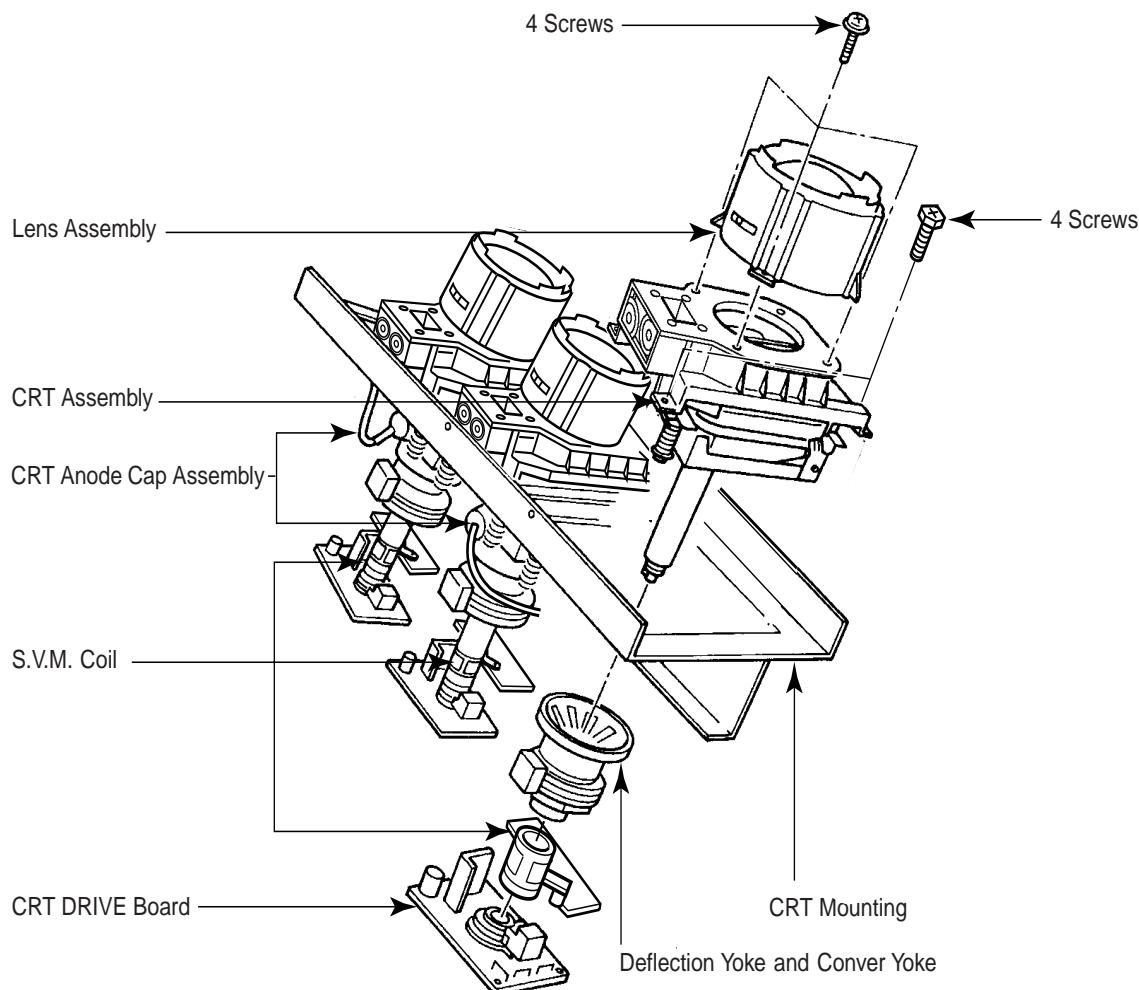

Lens and Neck Components View

TO REMOVE CRT (Same procedure for R, G, B)

1. Remove CRT DRIVE Board, S. V. M. COIL and DEF. YOKE from CRT.
2. Remove Lens Assembly.
3. Detach CRT Anode Cap from CRT.
4. Remove CRT Assembly from CRT Mounting.

CRT REPLACEMENT (Same procedure for R, G, B)



Reverse the removal procedures except the followings.

1. Anode Cable should be replaced with new one.
See "SERVICING PRECAUTIONS" shown below.
2. Install silicon (T461B) to the CRT, replace the Anode cable and put enough silicon again on around the Anode Cap as illustrated.

CAUTION: Align the Anode cable as illustrated on page 4.


ADJUSTING PROCEDURE IN REPLACING CRT

1. R.G.B. FOCUS ADJUSTMENT (page 6.)
 2. PICTURE TILT ADJUSTMENT (page 6.)
 3. USER CONVERGENCE CENTER CHECK
(See owner's manual.)
 4. CENTERING ADJUSTMENT (page 6.)
 5. CONVERGENCE ADJUSTMENT (page 13.)
 6. WHITE BALANCE ADJUSTMENT (page 12.)
- Adjustments are complete.

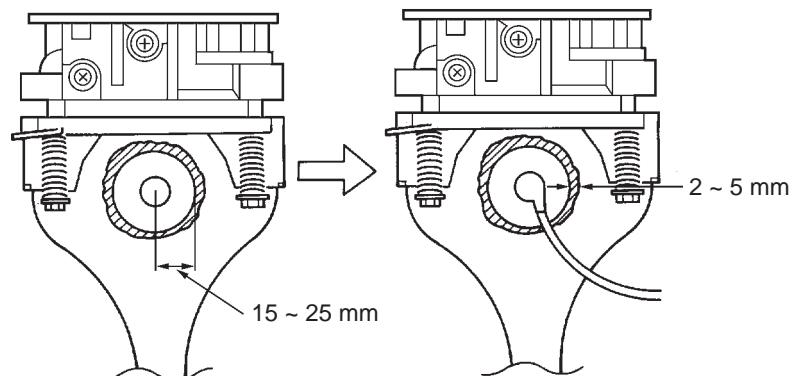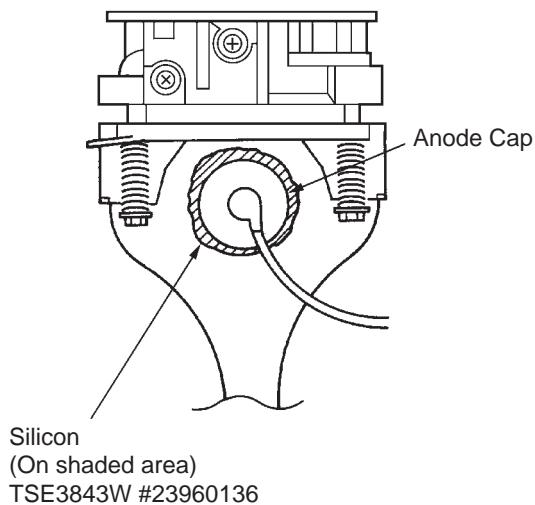


SERVICING PRECAUTIONS

- Do not use a magnetized screw driver for screws of Deflection Yoke and Velocity Modulation Coil to avoid magnetization of electron gun. Magnetization of electron gun will degrade basic function and result in unbalance of right and left shift of user static convergence, and result in no variable quantity.

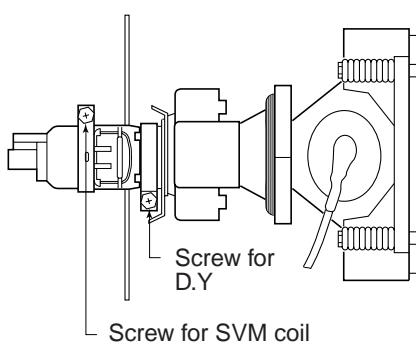


- When replacing the anode cap assembly (CRT) or anode lead assembly (F.B.T.), remove the anode lead holder from old one and attach the holder again to new anode lead.

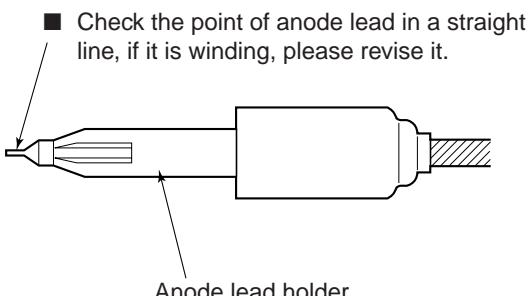

WARNING : BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRE-CAUTION" AND "PRODUCT SAFETY NOTICE" ON PAGE 3 OF THIS MANUAL.

PICTURE TUBE COMPONENTS ADJUSTMENT

DESCRIPTION OF NECK COMPONENTS

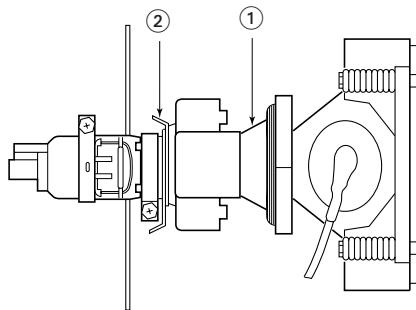

- ① Deflection yoke and convergence yoke
The position on the neck is required most front (CRT funnel side) and the screw is fastened after rotating yoke adjusting picture tilt.
- ② Centering magnet
After adjusting picture tilt, picture position is finally fixed by this magnet.
In order to get maximum margin of user convergence control for center of screen, this magnet have to be used for center convergence adjustment.

PREPARATION

Operate the receiver for at least 5 minutes.

R, G, B FOCUS ADJUSTMENT

1. Before adjusting the R, G, B FOCUS, remove the 4 screws of Lens Assembly which is fixed on the CRT Assembly. (See page 4.)
Then turn around the Lens Assembly by 180° to adjust the fastening screw (Fig. a) and fasten the 4 screws to secure Lens Assembly.
2. Select the adjustment mode. (See page 9.)
3. Press "7" button to display the built-in cross-hatch.
4. Press "0" and "RTN" buttons to make the picture a single Red color.
 - 100 button to erase Red color
 - 0 button to erase Green color
 - RTN button to erase Blue color
5. Loosen the fasten screw and adjust Red lense focus to best focusing point of picture center. Then fasten the screw. (See Fig. a.)




Fig. a


6. Adjust FOCUS VR "R" of FOCUS PACK to find best focusing point of picture center.
7. Repeat steps 3 to 5 for Green and Blue colors.

TILT ADJUSTMENT


Rotate R, G, B deflection yoke so that picture becomes horizon, then fasten screw.

CENTERING ADJUSTMENT

1. Stretch a thread between two center of screen edge (top and bottom, left and right).

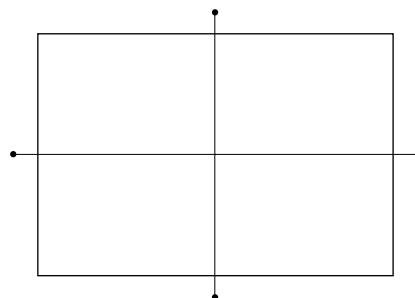


2. Select the adjustment mode.
3. Press TV/VIDEO button on the Remote Control to display the white cross-bar.

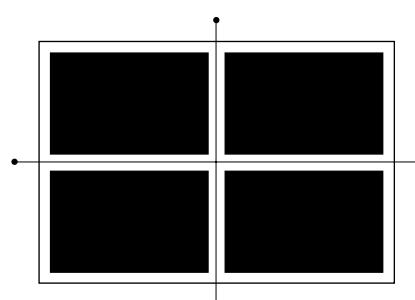

4. Perform VCEN adjustment. (See page 11.)
5. Adjust G centering magnet so that the cross-bar pattern center comes to screen center.
6. Perform HEIGHT adjustment . (See page 12.)
7. Perform VERT. LINEARITY adjustment.
8. Perform WIDTH adjustment. (See page 12.)
9. Check whole quality of green line.
10. Adjust R, B centering magnet so that the cross-bar pattern center comes to screen center.

LOCATION OF SCREEN AND FOCUS VR'S

To remove the speaker grille and front panel.

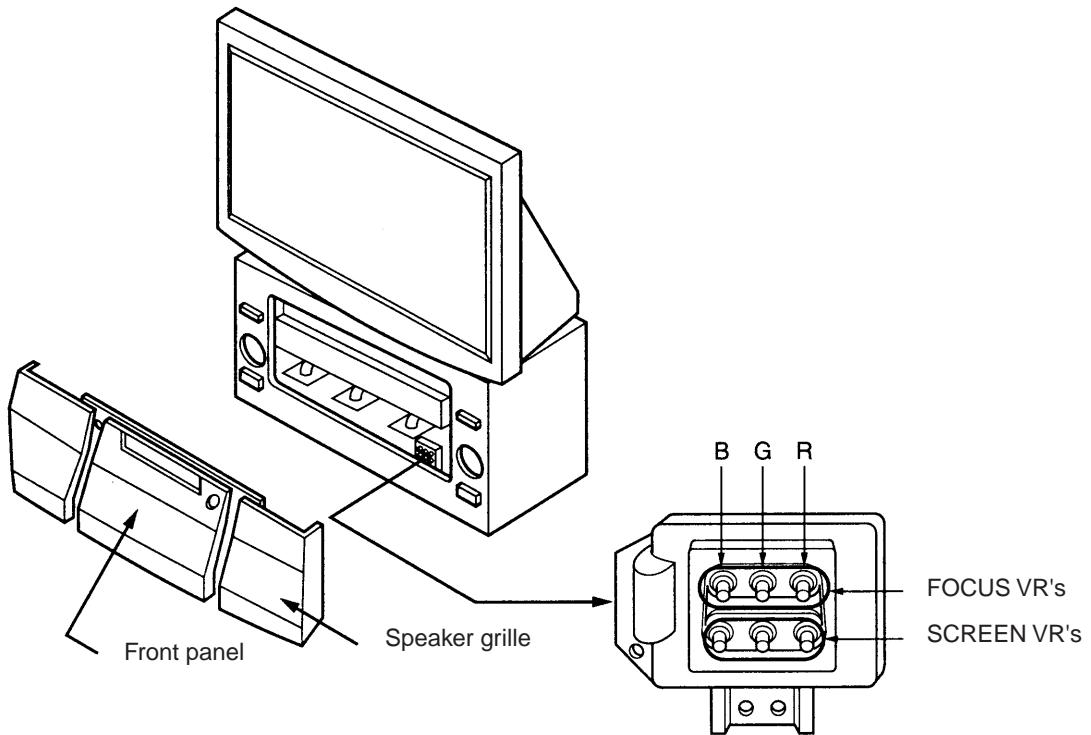


REPLACEMENT OF THE CRT

Service parts are provided for each R, G and B.
The contents of the parts are as follows.

		R	G	B
HITACHI CRT	43"	23003591	23003592	23003593
TOSHIBA CRT	43"	23003798	23003799	23003800

REPLACEMENT OF HIGH VOLTAGE CABLE

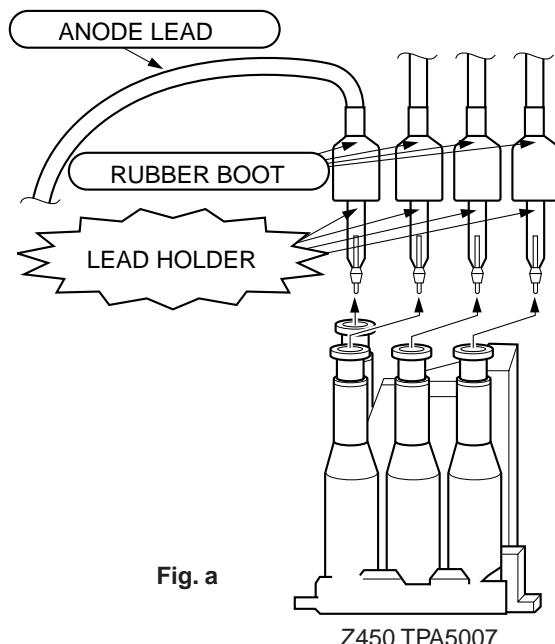

- When replacing Anode Lead or Anode Cap with new one, remove Lead Holder from old lead as shown in figure below, and put it on new lead. Do not throw away Lead Holder.

NOTE : THE LEAD HOLDER IS ATTACHED TO TPA5007 (Z450), BUT IS NOT ATTACHED TO ANODE LEAD AND ANODE CAP. RUBBER BOOT IS ATTACHED TO ANODE LEAD AND ANODE CAP.

- Detaching Lead Holder


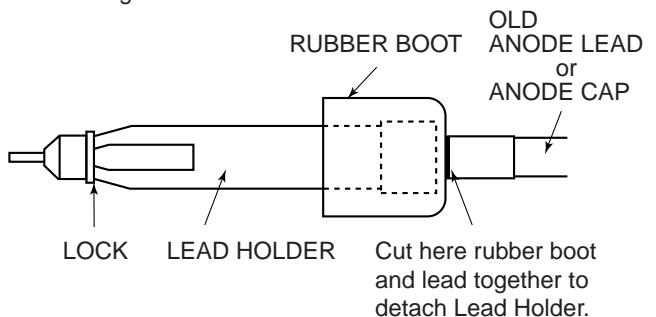


Fig. b

SERVICE MODE


1. ENTERING TO SERVICE MODE

- 1) Press MUTE button once on Remote Control.
- 2) Press MUTE button again to keep pressing.
- 3) While pressing the MUTE button, press MENU button on TV set.

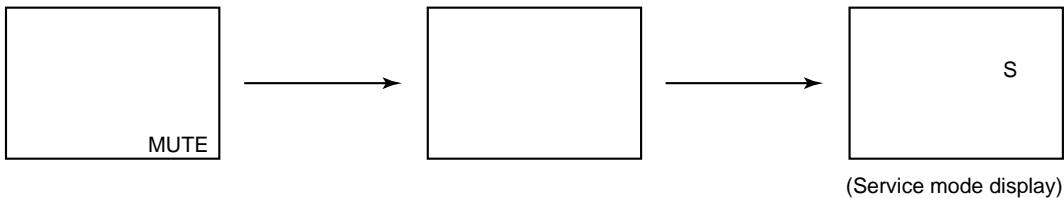

2. DISPLAYING THE ADJUSTMENT MENU

- 1) Press MENU button on TV.

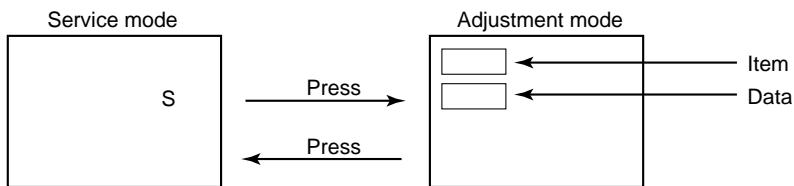

3. KEY FUNCTION IN THE SERVICE MODE

The following key entry during display of adjustment menu provides special functions.

Screen adjustment mode ON/OFF:	TV (ANT)/VIDEO button (on TV)
Selection of the adjustment items :	Channel ▲/▼ (on TV or Remote)
Change of the data value :	Volume ▲/▼ (on TV or Remote)
Adjustment menu mode ON/OFF :	MENU button (on TV)
Initialization of the memory (QA02) :	RECALL+Channel button on TV (▲)
Initialization of the self diagnostic data:	RECALL+Channel button on TV (▼)
"RCUT" selection :	1 button
"GCUT" selection :	2 button
"BCUT" selection :	3 button
"SCNT" selection :	4 button
"SCOL" selection :	5 button
"TNTC" selection :	6 button
Convergence adj :	7 button
Test audio signal ON/OFF (1kHz) :	8 button
Self diagnostic display :	9 button

4. SELECTING THE ADJUSTING ITEMS

- 1) Every pressing of CHANNEL ▲ button in the service mode changes the adjustment items in the order of table-2.
(▼ button for reverse order)

Refer to table-2 for preset data of adjustment mode.
(See SETTING & ADJUSTING DATA on page 19)

5. ADJUSTING THE DATA

- 1) Pressing of VOLUME ▲ or ▼ button will change the value of data in the range from 00H to FFH. The variable range depends on the adjusting item.

6. EXIT FROM SERVICE MODE

- 1) Pressing POWER button to turn off the TV once.

■ INITIALIZATION OF MEMORY DATA OF QA02


After replacing QA02, the following initialization is required.

1. Enter the service mode, then select any register item.
2. Press and hold the RECALL button on the Remote, then press the CHANNEL ▲ button on the TV. The initialization of QA02 has been completed.
3. Check the picture carefully. If necessary, adjust any adjustment item above.
Perform "Programming Channel Memory" on the owner's manual.

CAUTION: Never attempt to initialize the data unless QA02 has been replaced.

7. SELF DIAGNOSTIC FUNCTION

- 1) Press "9" button on Remote Control during display of adjustment menu in the service mode.
The diagnosis will begin to check if interface among IC's are executed properly.
- 2) During diagnosis, the following displays are shown.

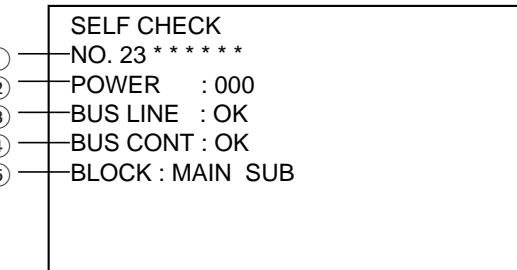

① Part number of microprocessor (QA01)

② Operation number of protection circuit (current limiter) "000" is normal.

③ BUS line check ————— "OK" Normal

 "SCl-GND" or "NG" SCL-GND short circuit
 "SDA-GND" or "NG" SDA-GND short circuit
 "SCL-SDA" or "NG" SCL-SDA short circuit

④ BUS line ACK (acknowledge) check

 "OK" Normal

 Display of Location Number NG

 (Display example)

 "QA02 NG", "H001 NG", "Q501 NG" etc.

Note: The indication of failure place is only one place though failure places are plural. When repair of a failure place finishes, the next failure place is indicated. (The order of priority of indication is left side.)



⑤ Sync. signal check ————— Green display Normal


 Red display NG

 MAIN Main sync

 SUB Sub sync (when turn on the PIP)

ELECTRICAL ADJUSTMENT

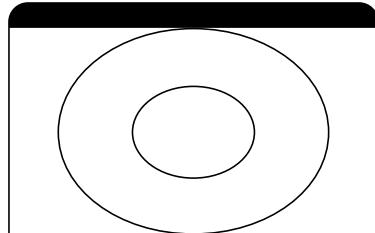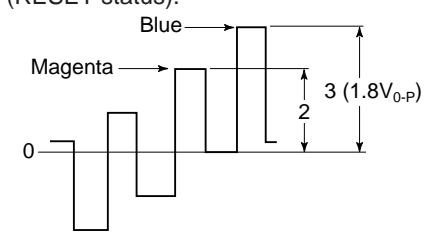
ITEM	ADJUSTMENT PROCEDURE
f_H (free-running frequency of Hor. oscillator)	<ol style="list-style-type: none"> Receive NTSC signal. Short the terminal "TP +9V" and the terminal "TP (Free run)" on the signal board with a jumper wire. Connect the probe of frequency counter to the lead of R426 and GND. Adjust the frequency to "31.47 ± 0.2 kHz" by turning R4055. Disconnect the shorted wire, then confirm that the picture is synchronized.
VERTICAL POSITION (VCEN)	<ol style="list-style-type: none"> Receive NTSC signal. Call up the adjustment mode display, then select the item VCEN. Press the VOLUME ▲ or ▼ button to get the voltage 0 ± 10 mV. Measuring terminals are TP-V and TP-G on SIGNAL Board.
SUB-BRIGHTNESS (BRTC)	<ol style="list-style-type: none"> Constrict the picture height until the vertical retrace line appears adjusting the HEIGHT control on the MAIN board. Adjust the CONTRAST to the minimum and BRIGHTNESS to the center. Enter the service mode, then select "BRTC" register. Adjust the data value so the belt of vertical retrace line just disappear. Adjust the CONTRAST for the desired contrast. Adjust the HEIGHT control. <div style="text-align: right; margin-top: 10px;">  <p>Vertical retrace line</p> </div>
SUB-COLOR (SCOL) SUB-TINT (TNTC)	<ol style="list-style-type: none"> Receive color-bar signal from color-bar generator. Adjust the BRIGHTNESS and CONTRAST to the center (RESET status). Connect oscilloscope to TP501 on the MAIN board. Enter the service mode, then select "SCOL". Temporarily adjust the data value to achieve about $1V_{0-p}$ of blue bar. Select "TNTC" register. Adjust the data value to obtain the blue bar to magenta bar ratio of 3:2 as shown. Select "SCOL" register. Adjust the data value to achieve $1.8V_{0-p}$ of blue bar on scope. Check the picture with off-air signal. <div style="text-align: right; margin-top: 10px;">  </div>
PICTURE POSITION (HPOS)	<ol style="list-style-type: none"> Receive NTSC signal. Call up the adjustment mode display. Select the item "HPOS", and adjust the data to "66H". Adjust the picture position alternately by turning CENTERING MAGNETS for proper picture position. Check the picture with off-air signal.
WIDTH (WID)	<ol style="list-style-type: none"> Receive NTSC signal. Select the "FULL" mode by PIC SIZE button on Remote Control. Call up the adjustment mode display, then select the item WID. Press the VOLUME ▲ or ▼ button to get the picture so that left and right edges of video signal begin to lack. Press the VOLUME ▲ button to advance the data by 12 steps. <p>NOTE: Check the horizontal picture position is correct.</p>

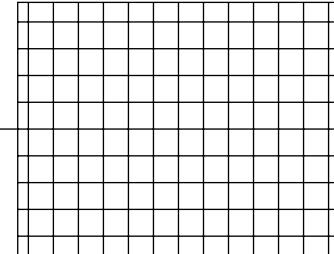ITEM	ADJUSTMENT PROCEDURE
HEIGHT (HIT) * Only 4:3 mode	<ol style="list-style-type: none"> 1. Receive NTSC signal. 2. Call up the adjustment mode display, then select the item HIT. 3. Press the VOLUME ▲ or ▼ button to get the picture so the top and bottom of video signal begins to lack. 4. Press the VOLUME ▲ button to advance the data by 12 steps. Note : Check the vertical picture position is correct.
HEIGHT (HIT) * Only 16:9 mode	<ol style="list-style-type: none"> 1. Call up the adjustment mode display, then select the item HIT. 2. Press the VOLUME ▲ or ▼ button so that picture height becomes 75% of the front mask. *Note : Adjust this data after 4:3 mode.
VERTICAL LINEARITY (VLIN)	<ol style="list-style-type: none"> 1. Receive cross-hatch pattern. 2. Call up the adjustment mode display, then select the item VLIN. 3. Press the VOLUME ▲ or ▼ button to obtain the picture of the best linearity. 4. Then readjust the item HIT. 
WHITE BALANCE (RCUT) (GCUT) (BCUT) (RDRV) (BDRV)	<ol style="list-style-type: none"> 1. Press RESET button on TV or remote hand set. 2. Call up the adjustment mode display, then adjust the data of items RCUT, GCUT and BCUT to "40". 3. Press TV (ANT)/VIDEO button on TV. 4. Gradually rotate R, G and B SCREEN volume of FOCUS PAC (page 7) clockwise or counterclockwise until the raster appears slightly on the CRT through the each lens, and leave them. (Look into the lens in order to check the raster.) 5. Press TV (ANT)/VIDEO button on TV again. 6. Exit from service mode. 7. Receive white laster pattern signal, and adjust the contrast to the minimum to make white picture to low light. 8. Adjust the data of items RCUT, GCUT and BCUT for low light area. 9. Adjust the contrast to the maximum to make white picture to high light. 10. Adjust the data of items GDRV and BDRV Controls for proper white-balanced picture in high light area. 11. Check the white balance in both low and high light areas. If necessary, perform again steps from 7 to 9.

CONVERGENCE ADJUSTMENT

Adjust convergence from center to circumference in order.


1. Select the adjustment mode following the steps on page 9.

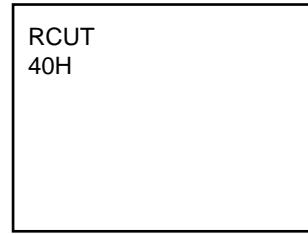

KEY FUNCTION IN THE CONVERGENCE ADJUSTMENT:

Up :	2 button
Select Green color:	3 button
Left :	4 button
Blinking of cursor ON/OFF:	5 button
Right:	6 button
Adjust mode ON/OFF:	7 button
Down:	8 button
Erase Green line:	0 button
Erase Red line:	100 button
Erase Blue line:	CHRTN (ENT) button

2. Press "7" button to display the built-in cross-hatch pattern.

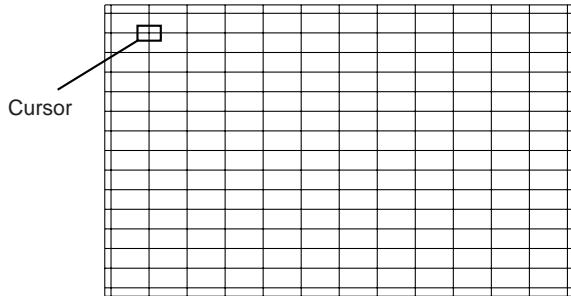

Note:

Adjusting procedure in replacing convergence board.

1. User convergence center check. Make sure the best convergence setting is about the center of adjustable range.
2. CENTERING ADJUSTMENT
3. PICTURE POSITION ADJUSTMENT
4. HIT, WID ADJUSTMENT
5. CONVERGENCE ADJUSTMENT

The pattern includes three colors (R, G, B).

The cursor should be blinking in Red.

This means that the Red color is adjustable.


Adjustment around cursor can be done.

3. Press "3" button to select Green color to be adjusted.
4. Press "5" button to stop the blinking of cursor.
5. Press "2 (up)", "8 (down)", "4 (left)" or "6 (right)" to obtain the correct cross-hatch pattern as above.
If necessary, the specified color line can be erased from the screen.
100 button to erase Red line
0 button to erase Green line
RTN (ENT) button to erase Blue line
6. Press "5" button to make the cursor blinking.
7. Press "2", "8", "4", "6" buttons to move the cursor to other point to be adjusted.
8. Repeat steps 4 to 7.
9. Repeat steps 3 to 8 to adjust Red and Blue colors.
Converge the selected color line into the Green line.
10. Press "7" button to enter the adjusted states.
At this time, picture changes for about 1 second.
11. Press "7" button again to return to the normal picture.


ADJUSTING DIMENSION OF EACH PICTURE SCREEN**43 inches:**

(1) NTSC


SCREEN SIZE (874 mm : 655 mm)

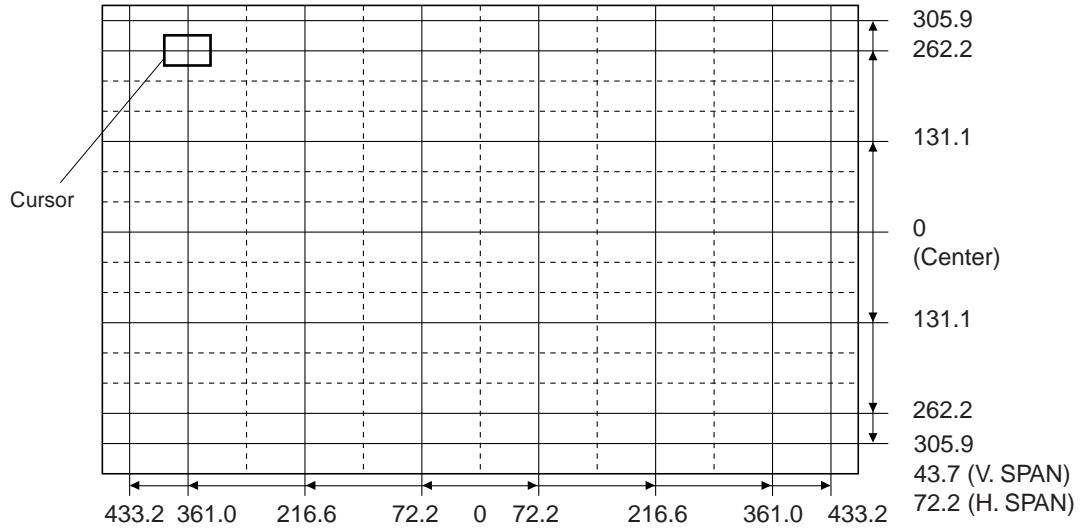

(2) HD (4 : 3)

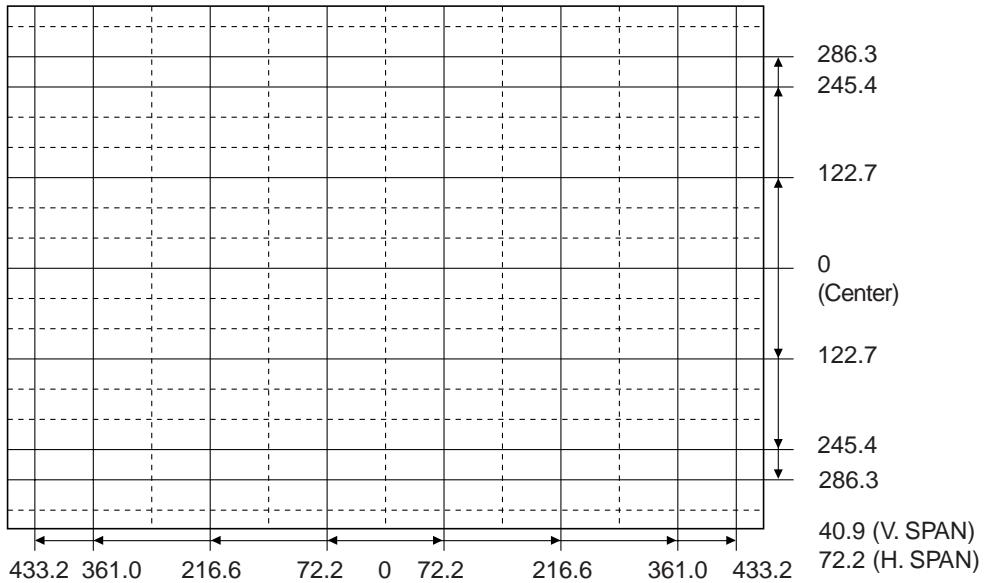

(3) HD (16 : 9)

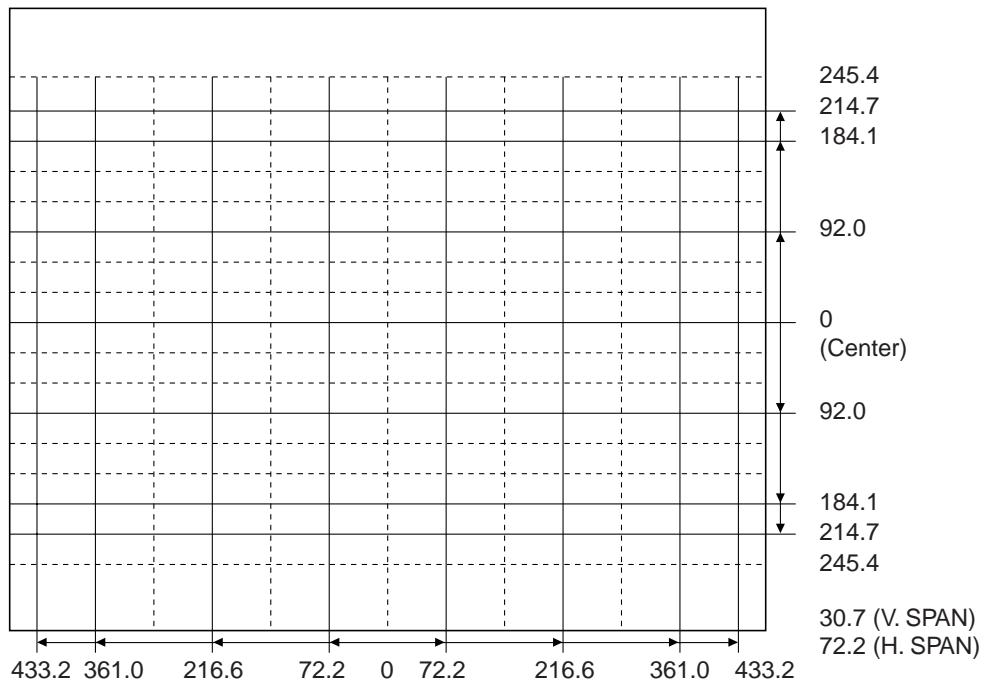

NOTES

In many cases, color misconvergence may be corrected by returning HIT and WID data in main deflection side to initial adjusting values. Following cases will surely require readjustment of convergence.

CRT REPLACEMENT

When CRT is replaced, main deflection readjustment and color matching are required.

Perform following procedures.

1. Replace two CRT's of blue and red.
2. Perform horizontal adjustment for blue and red yokes on base of green CRT data. Mount yoke and velocity mod. coil alignment, pushing towards CRT without gap.
3. Adjust alignment of blue and red. (Refer Alignment adjustment for details.)
4. Rotating centering magnet, adjust CRT centers of red and blue to CRT center of green.
(Picture position adjustment)
5. Adjust HIT and WID data of main deflection, and decide data at the most precise screen comparing to green data.
6. Adjust convergence of each screen picture for color matching. Do not move green one at this time.
7. After convergence adjustment of each screen picture finishes, replace green CRT.

For green CRT as well, repeat steps 2 to 5 above on bases of red and blue color matching to adjust convergence.

REPLACING CONVERGENCE UNIT

When replacing convergence unit, all picture screens require readjustment basically, but the following method allows process be reduced considerably.

1. Replace the memory (Q713) on defective unit with memory on new unit. Mounting the unit on the SET after the above working realizes picture screen before replacement immediately.
2. Mount unit which has combination of old and new memories, on SET and turn it on. Screen shows whole picture looks like straightly shifted towards vertical or horizontal direction.
3. Adjust again centers of green, red and blue with centering magnets.
4. Check each picture screen for slight disparity of color and picture size. If necessary, add some adjustments of main deflection and color matching of convergence.

SCREEN AND MIRROR ALIGNMENTS

* Please refer to MECHANICAL DISASSEMBLY page 25.

CLEANING OF LENS AND MIRROR

CAUTION : Do not hold the optical system parts (lens and mirror) with bare hand to avoid finger-prints on the surface of those parts.

HOW TO CLEAN LENS AND MIRROR

1. Be sure to remove sand dust with an air brush, etc.
2. When it is stained slightly, breathe upon it and wipe away with the specified cleaning cloth.
For other stains than the above, wipe the stains away with the specified cloth into which a cleaning liquid has been soaked.

Cleaning liquid..... **LENS LUSTER** (Manufactured by Edmund Scientific Co.), etc.

HOW TO CLEAN SCREEN

When cleaning the screen, use a soft cloth so as not to damage the screen.

1. Wipe the screen with a dry cloth to remove moisture on the screen.

Note : Absolutely do not use detergent, water, alcohol, benzine, thinner, etc. for cleaning in order not to wipe away the black print on the surface.

CIRCUIT CHECKS

HIGH VOLTAGE CHECK

CAUTION: There is no HIGH VOLTAGE ADJUSTMENT on this chassis. Checking should be done following the steps below.

1. Connect an accurate high voltage meter to the anode of the picture tube.
2. Turn on the receiver. Set the BRIGHTNESS and CONTRAST to minimum (zero beam current).
3. High voltage must be measured below (B) kV.
Refer to table-1 for high voltage (B).
(See SETTING & ADJUSTING DATA on page 19)
4. Vary the BRIGHTNESS to both extremes to be sure the high voltage does not exceed the limit under any conditions.

CAUTION:

When the following parts fail, check the High Voltage after replacing.

Location No.	Name	Descriptions	
		40", 43"	50", 55", 61"
T461	Flyback Capacitor	TFB3088AD 4300pF, ±3%	← 5100pF, ±3%
C407	Capacitor	0.027μF, ±5%	0.022μF, ±3%
C408	Capacitor	0.015μF, ±5%	0.022μF, ±5%
C445	Capacitor	0.011μF, ±5%	0.012μF, ±5%
C446	Capacitor	6200PF, ±3%	5600PF, ±3%
C447	Capacitor	8200PF, ±5%	←
C448	Capacitor	1000PF, ±3%	←

ANODE VOLTAGE MEASURING METHOD

CAUTION: Take extra precaution when measuring this high voltage. High voltages are also present in surrounding circuit boards (CRT DRIVE assembly, DEFLECTION assembly, and POWER SUPPLY assembly).


1. Disconnect the FBT anode cable as outlined below. Measure high voltage at the point where the cable enters the FBT.
2. Holding the rubber cover firmly, turn it counterclockwise and check that the lock has been disengaged. (See Fig. b on page 8.)
3. Determine the extent of the rubber cover before disconnecting the cable.
4. Pull straight up the anode cable to disconnect.
5. When reconnecting the cable, proceed in the reverse order. After reconnecting, tug on the cable to check that it is secure.

FS CIRCUIT CHECK

The Fail Safe (FS) circuit check is indispensable for the final check in servicing. Checking should be done following the steps below.

1. Turn the receiver on.
2. Temporarily short TP- (R) and TP- (X) on the DEF/POWER Board with a jumper wire.
Raster and sound will disappear.
3. The receiver must remain in this state even after removing the jumper wire. This is the evidence that the FS circuit is functioning properly.
4. To obtain a picture again, temporarily turn the receiver off and allow the FS circuit more than 5 seconds to reset. Then turn the receiver on to produce a normal picture.

Troubleshooting Guide for Fail Safe Circuit

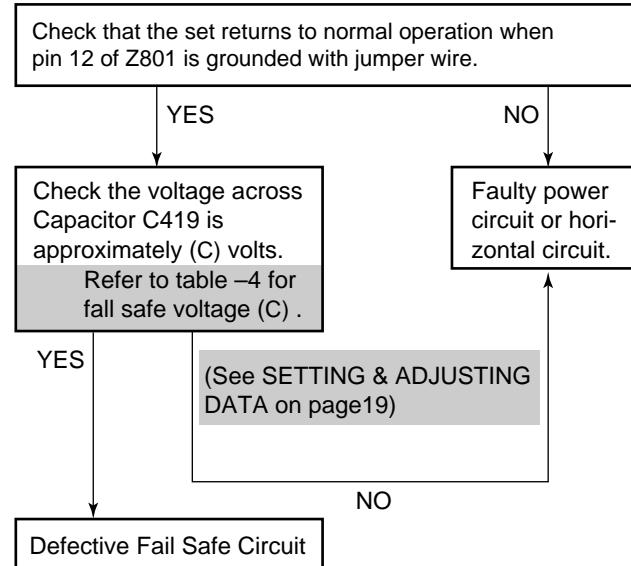

CHAPTER 2 SPECIFIC INFORMATIONS

SETTING & ADJUSTING DATA

【SAFETY INSTRUCTIONS】

		43"
HIGH VOLTAGE AT ZERO BEAM:	(A)	29.5 kV
MAX HIGH VOLTAGE:	(B)	31.0 kV

Table-1

【SERVICE MODE】

ADJUSTING ITEMS AND DATA IN THE SERVICE MODE:

Item	Name of adjustment	Preset	Date	Item	Name of adjustment	Preset	Date
RCUT	R CUTOFF	40H	←	BLKE	VERT. BLANKING END	—	←
GCUT	G CUTOFF	40H	←	PYOF	PIP Y OFFSET	17H	←
BCUT	B CUTOFF	40H	←	PIOF	PIP I OFFSET	24H	←
RDRV	R DRIVE	40H	←	PQOF	PIP Q OFFSET	1EH	←
BDRV	B DRIVE	40H	←	VCP	V-COMPENSATE	0AH	←
BRTC	SUB-BRIGHT	80H	←	PARA	E-W PARABOLA (DPC)	29H	←
TNTC	SUB-TINT	44H	←	CNR	E-W CORNER	08H	↑
SCOL	SUB COLOR	05H	←	HCP	H-COMPENSATE	00H	←
SCNT	SUB-CONTRAST	10H	←	VFC	V-F CORRECT	00H	←
HPOS	HORIZ. POSITION	6DH	←	PHUE	PIP TINT	40H	←
VPOS	VERT. POSITION	00H	←	PCNT	PIP CONT	10H	←
HIT	HEIGHT	64H	55H	PCOL	PIP COLOR	15H	←
LIN	V-LINEARITY	12H	←	RGBB	RGB BRIGHT	40H	←
VSC	V-S CORRECTION	10H	←	VCEN	V POSITION	10H	←
WID	PICTURE WIDTH	23H	←	TVOP	TV OPTION	15H	←
VPS	V-SHIFT	0AH	←	OPT0	TV SET OPTION	50H	←
HPHA	HORIZ. PHASE (Q510)	—	←	OPT1	TV SET OPTION	05H	←
BLKS	VERT. BLANKING START	—	←				

Table-2


【CIRCUIT CHECKS】

FBT DETECTION VOLTAGE	(C) 21.8V
-----------------------	-----------


Table-3

LOCATION OF CONTROLS (Representative : 43HX70)


TV front

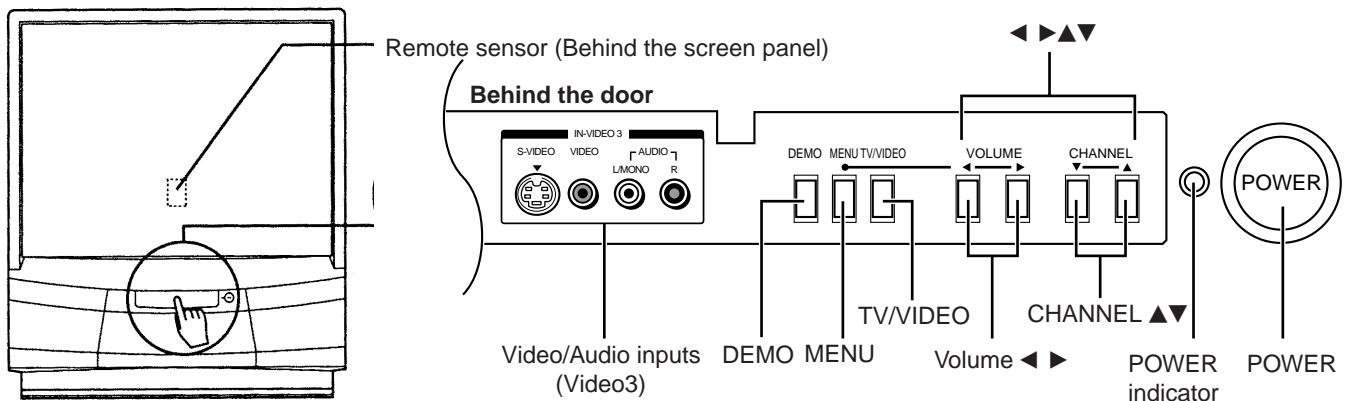

TV rear

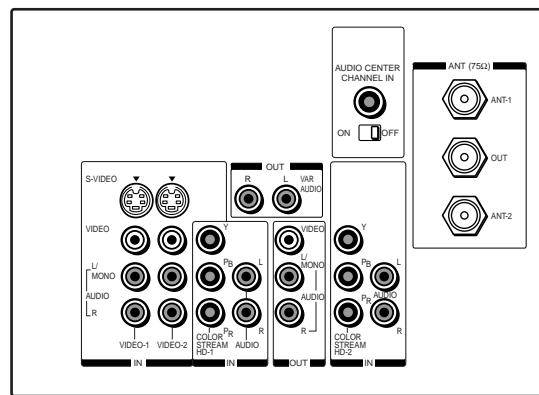

Remote Control

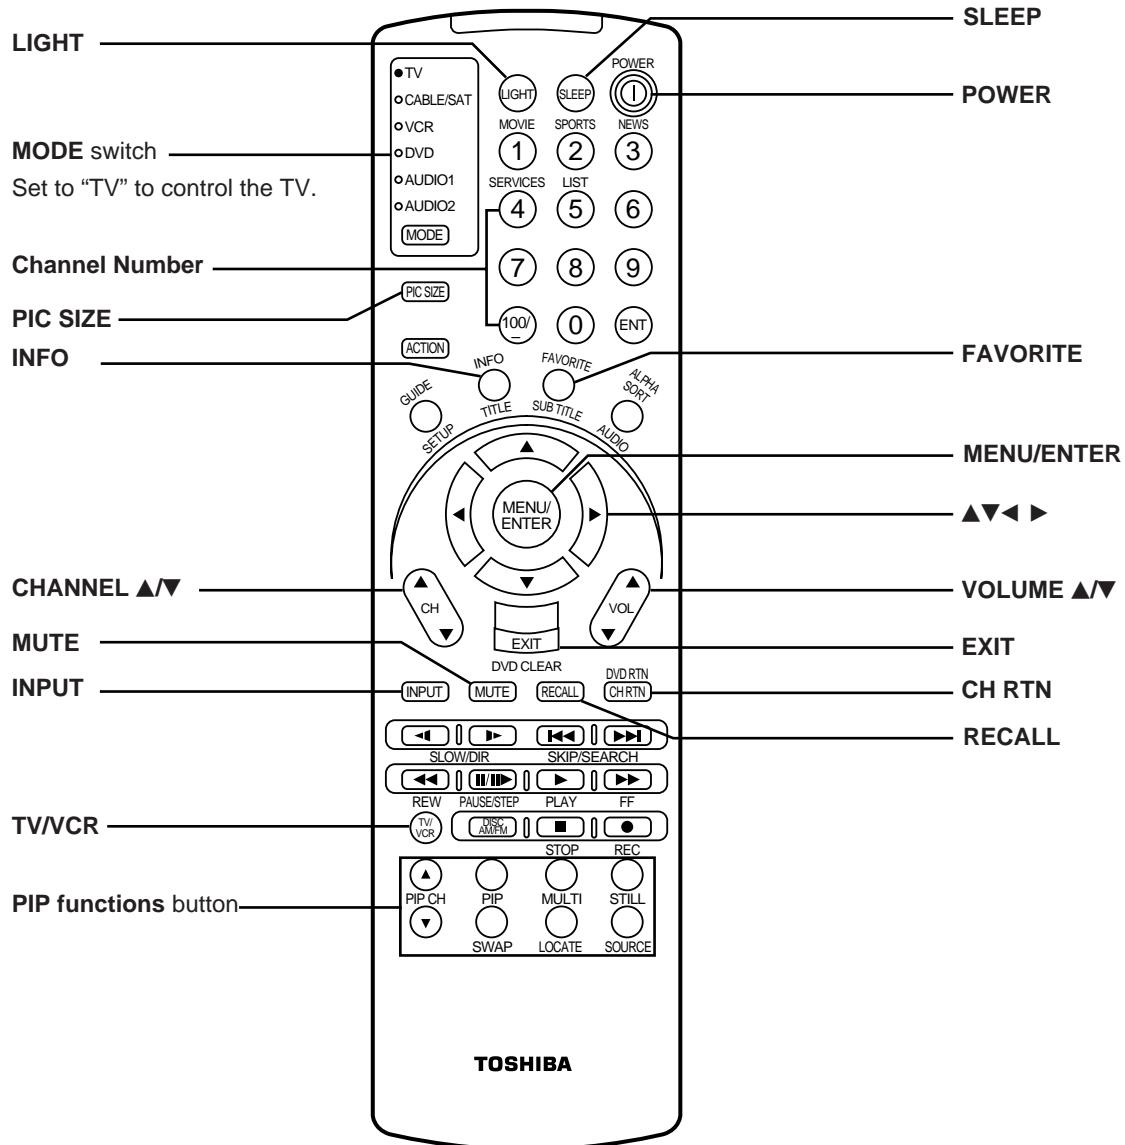

PROGRAMMING CHANNEL MEMORY

The channel memory is the list of TV channel numbers the TV tunes in when you press the CHANNEL ▲ or ▼ button.
First, use the TV/CABLE and CH PROGRAM functions to preset all active channels in your area automatically.
If necessary, arrange the preset channels with the ADD/ERASE functions so that you can tune into only desired channels.
Note: If you utilize both ANT-1 and ANT-2 terminals for some model, perform programming channels for each input source.

TV/CABLE function

- 1 Press MENU, then press ► or ◀ until the SET UP menu appears.
- 2 Press ▼ (or ▲) until "TV/CABLE" is highlighted.
- 3 Press ► or ◀ to highlight either "TV" or "CABLE", whichever you use.

CH PROGRAM function

- 1 Select "CH PROGRAM" following steps 1 and 2 above.
- 2 Press ► or ◀ to start channel programming.
The TV will automatically cycle through all the TV or CABLE channels selected by the TV/CABLE function, and store active channels in the channel memory.
- 3 When channel programming is complete, you will see the message to the right appears.
- 4 Press CHANNEL ▲ or ▼ to make sure the channel programming has been done properly.

ADD/ERASE function

After performing the CH PROGRAM function, you can add or erase specific channels.


- 1 Select the channel you want to erase using the CHANNEL ▲ or ▼ button, or select the channel you want to add using the **Channel Number** buttons.
- 2 Press MENU, then press ► or ◀ until the SET UP menu appears.
- 3 Press ▼ (or ▲) until "ADD/ERASE" is highlighted.
- 4 Press ► or ◀ :
To erase the channel press the button until "ERASE" is highlighted.
To add the channel press the button until "ADD" is highlighted.
- 5 Repeat steps 1 to 4 for other channels.

You have now completed the channel programming.

Note: The CHANNEL ▼/▲ buttons on the TV function as the ▼/▲ buttons while a menu is on the screen.


* Please refer to owner's manual in detail.

CIRCUIT BLOCK DIAGRAM

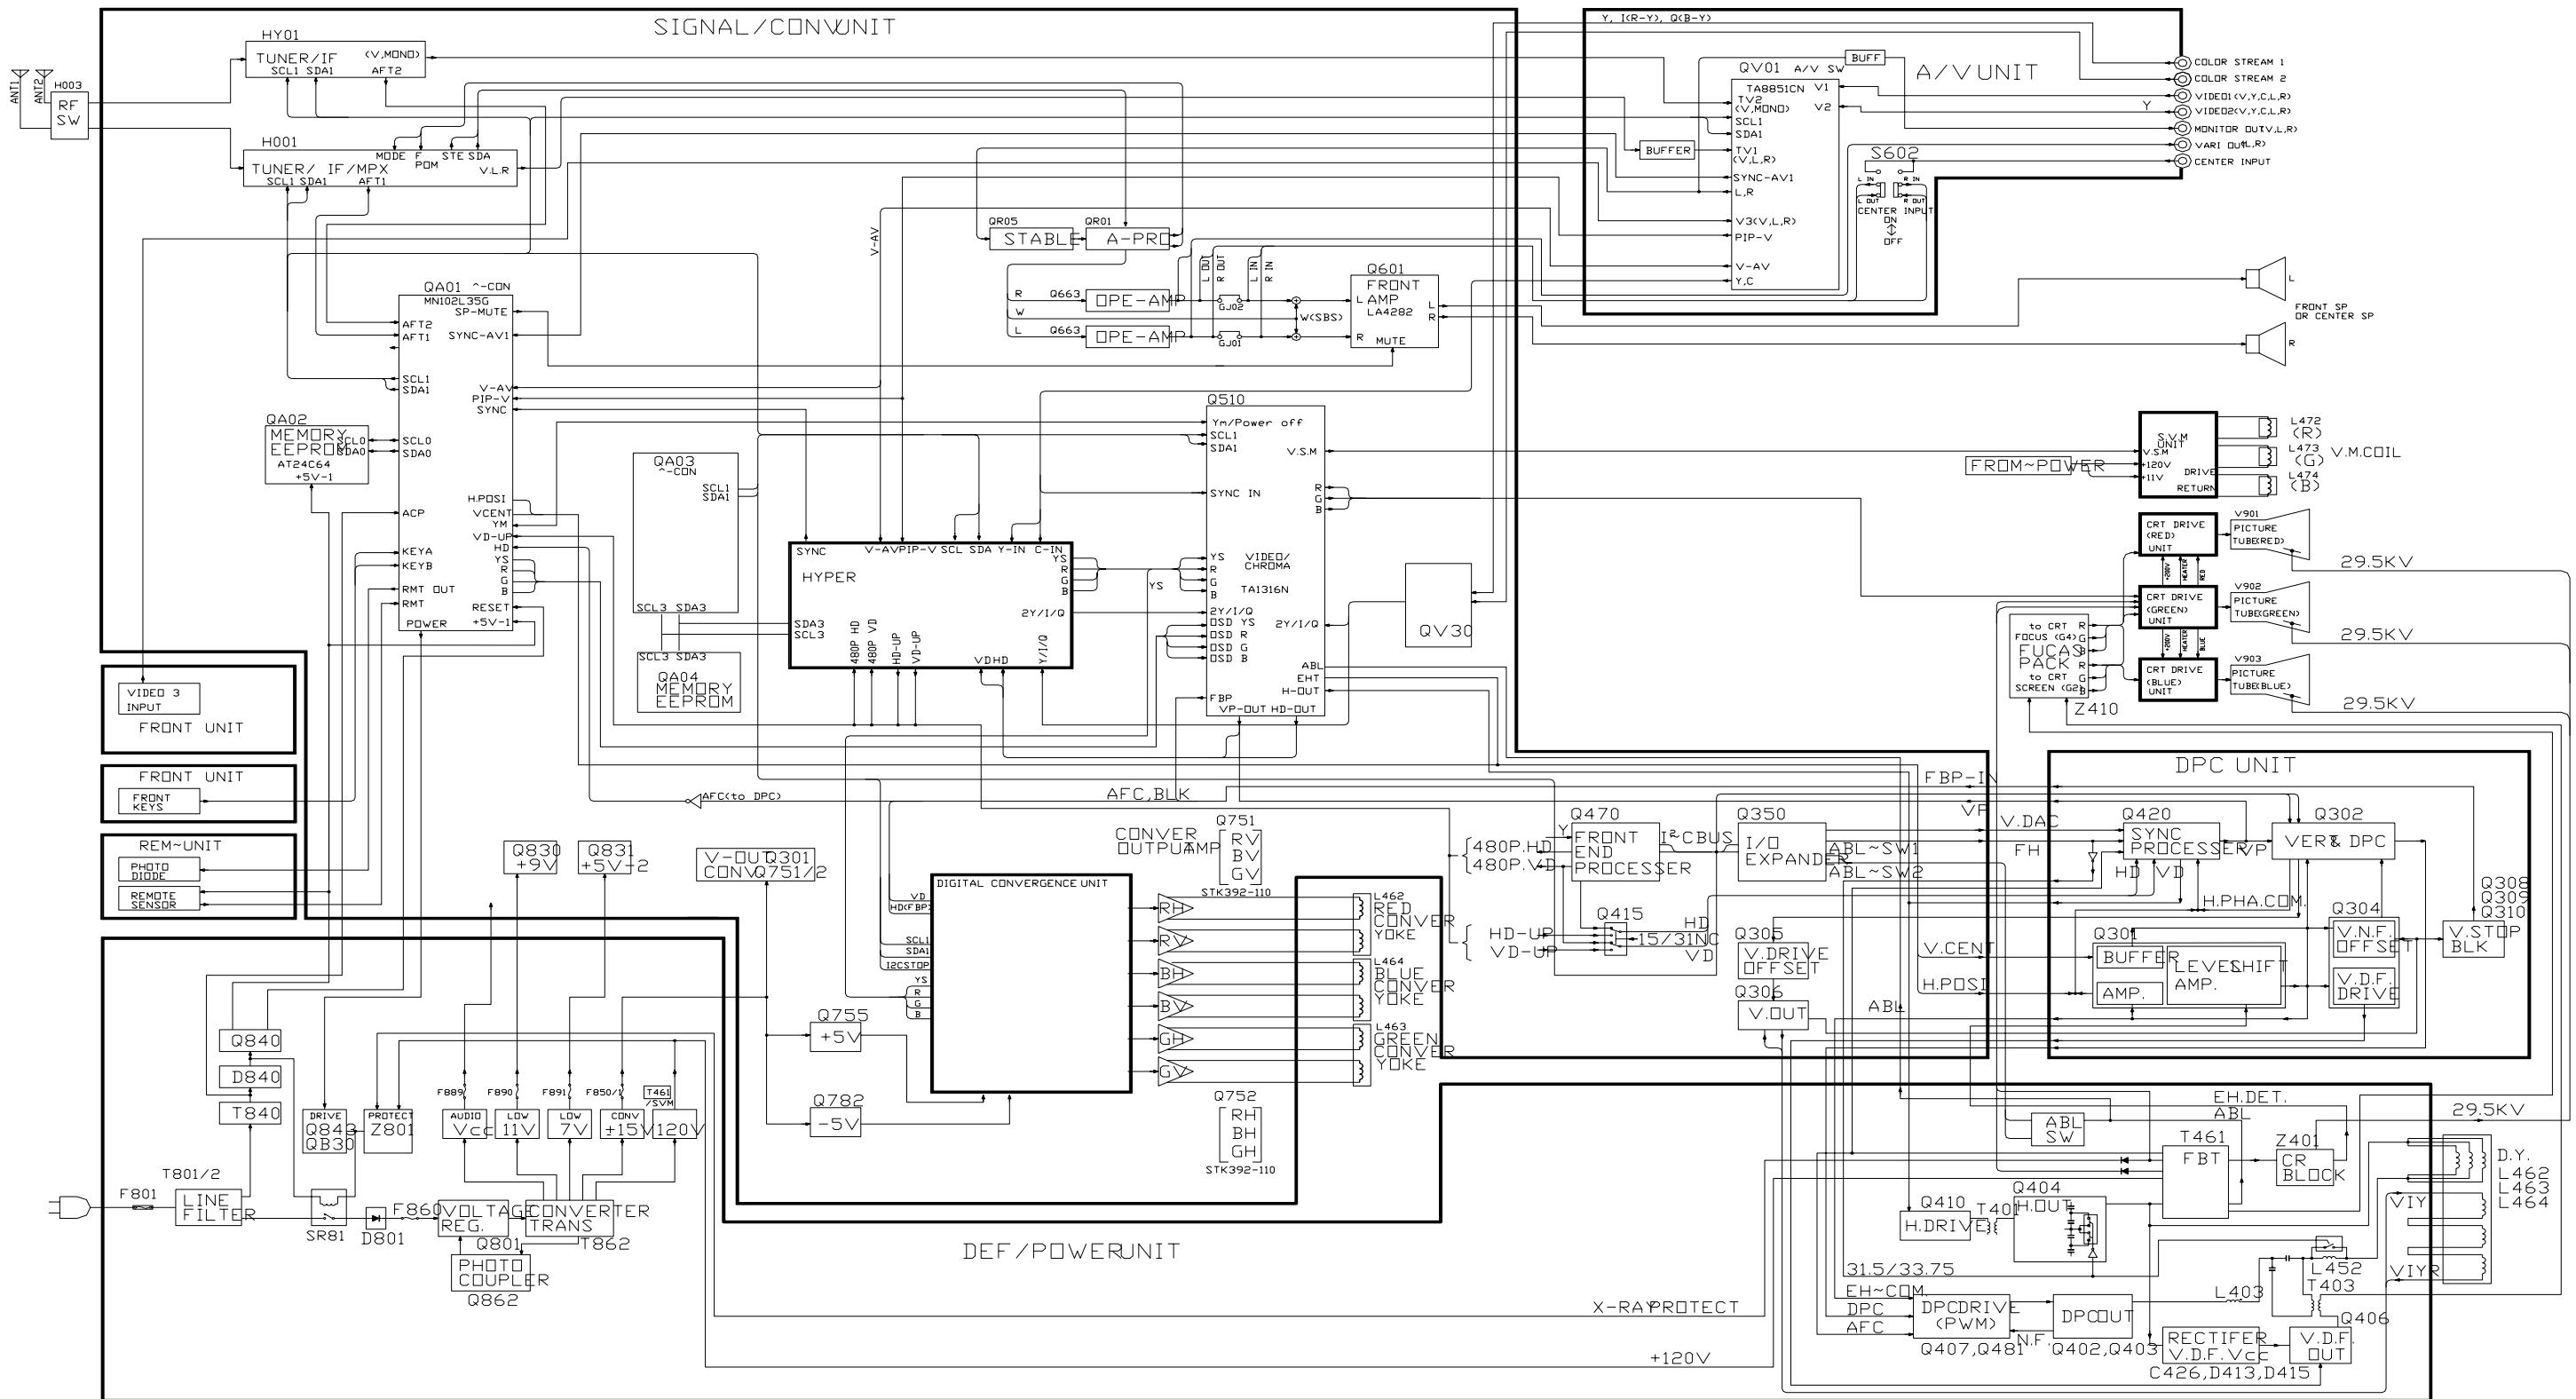

61HX70 Series
BLOCK DIAGRAM

MECHANICAL DISASSEMBLY

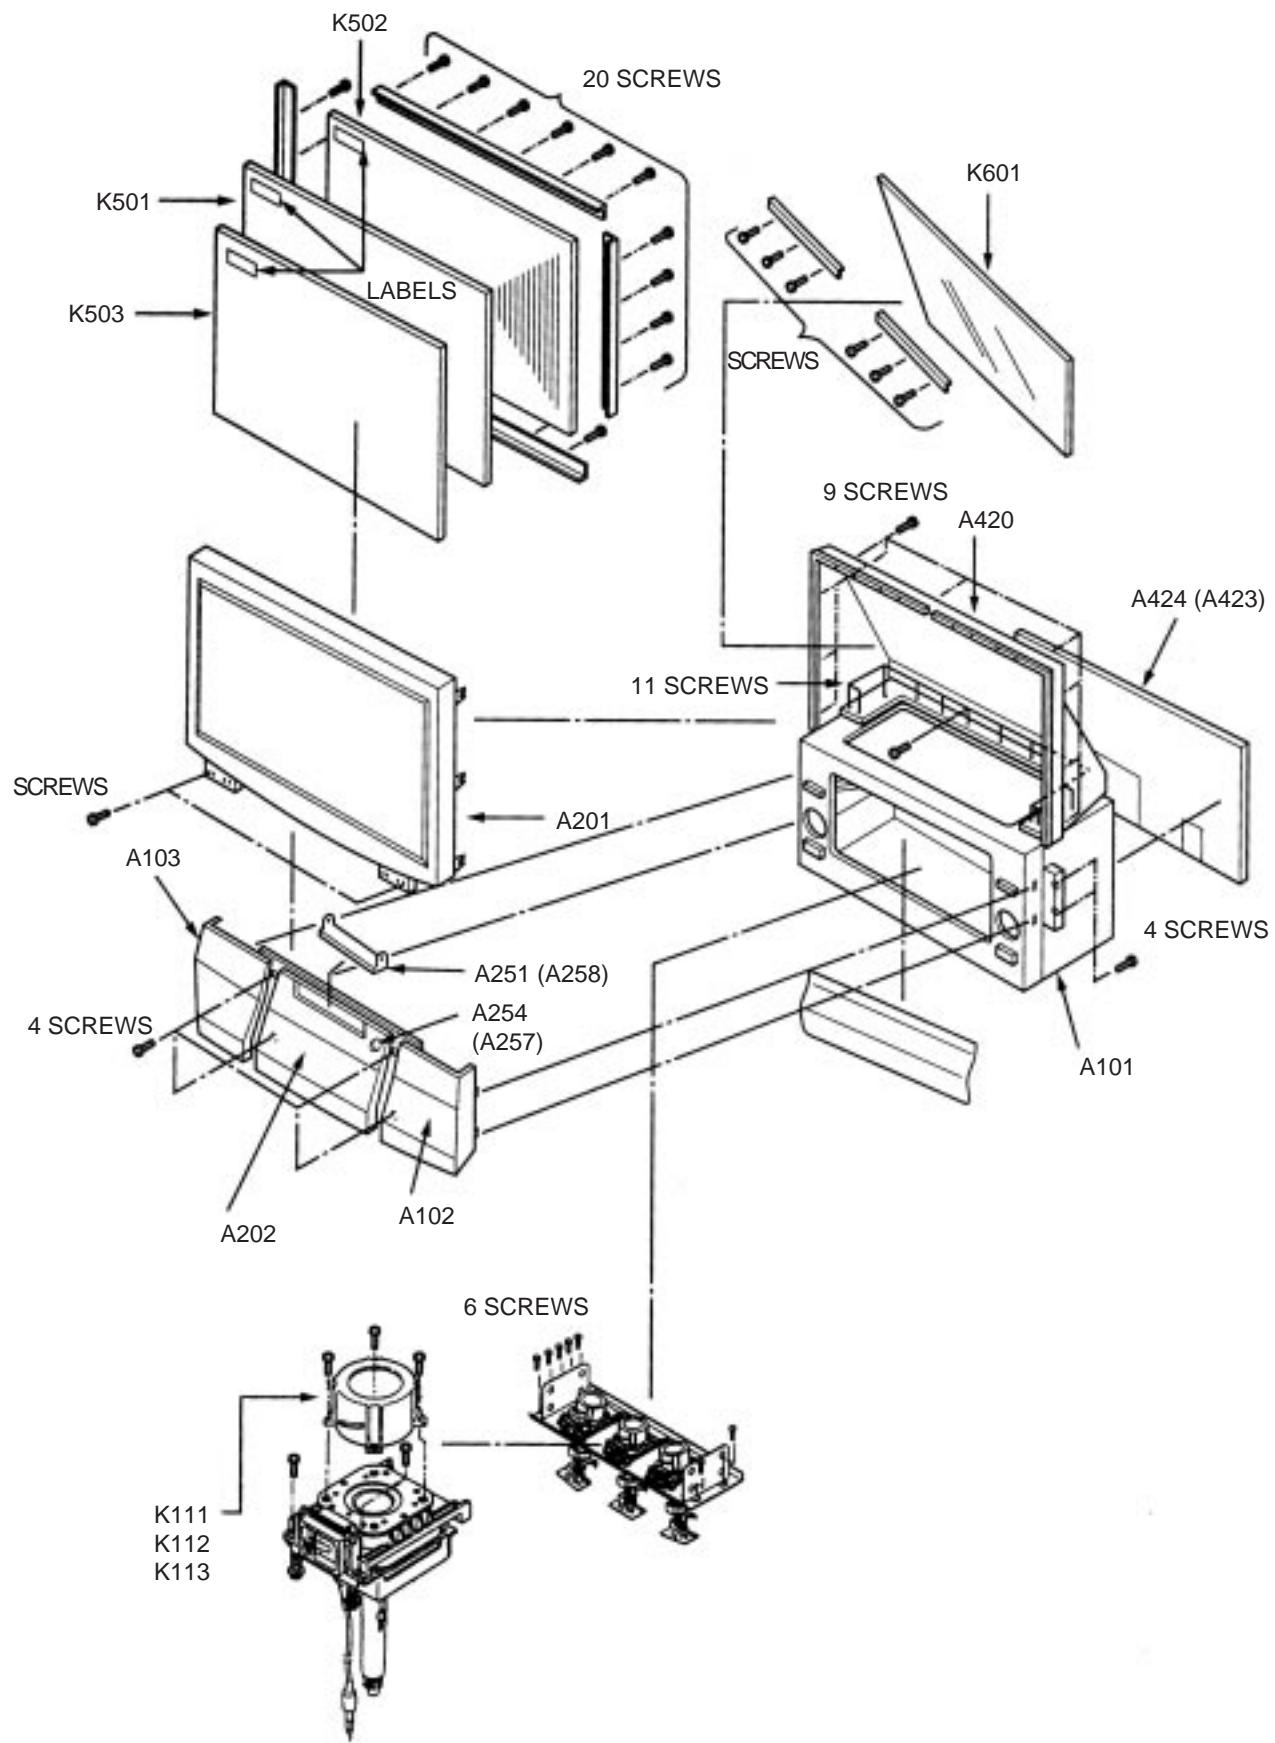

CHASSIS REPLACEMENT PARTS LIST

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRE-CAUTION" AND "PRODUCT SAFETY NOTICE" ON PAGE 3 OF THIS MANUAL.

CAUTION: The international hazard symbols “⚠” in the schematic diagram and the parts list designate components which have special characteristics important for safety and should be replaced only with types identical to those in the original circuit or specified in the parts list. The mounting position of replacements is to be identical with originals. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE. Do not degrade the safety of the receiver through improper servicing.

NOTICE:

- The part number must be used when ordering parts, in order to assist in processing, be sure to include the Model number and Description.
- The PC board assembly with * mark is no longer available after the end of the production.

Models : 43H70/43HX70

Capacitors	CD : Ceramic Disk	PF : Plastic Film
Resistors	CF : Carbon Film	CC : Carbon Composition
	OMF : Oxide Metal Film	VR : Variable Resistor

(All CD and PF capacitors are ±5%, 50V and all resistors, ±5%, 1/6W unless otherwise noted.)

Location No.	Part No.	Description
CAPACITORS		
C102	24665221	EL, 220 μ F, ±20%, 10V
C105	24109102	Chip, 1000pF, ±10%
C106	24669479	EL, 4.7 μ F, ±20%, 50V
C107	24666221	EL, 220 μ F, ±20%, 16V
C112	24665221	EL, 220 μ F, ±20%, 10V
C115	24109102	Chip, 1000pF, ±10%
C117	24666221	EL, 220 μ F, ±20%, 16V
C151	24212102	CD, 1000pF, ±10%
C201	24092730	Chip, 0.1 μ F, ±10%, 16V
C205	24206229	EL, 2.2 μ F, ±20%, 50V
C207	24105100	Chip, 10pF, ±0.5pF
C208	24105100	Chip, 10pF, ±0.5pF
C209	24105100	Chip, 10pF, ±0.5pF
C212	24666100	EL, 10 μ F, ±20%, 16V
C221	24503041	PF, 0.1 μ F, 63V
C301	24567683	PF, 0.068 μ F
C302	24567224	PF, 0.22 μ F
C303	24666101	EL, 100 μ F, ±20%, 16V
C304	24503041	PF, 0.1 μ F, 63V
C305	24503041	PF, 0.1 μ F, 63V
C306	24567103	PF, 0.01 μ F
C307	24617912	EL, 2.2 μ F, ±10%, 50V
C308	24567183	PF, 0.018 μ F
C309	24212102	CD, 1000pF, ±10%
C310	24073020	EL, 1000 μ F, ±20%, 10V
C311	24567103	PF, 0.01 μ F
C312	24591102	PF, 1000pF
C313	24567474	PF, 0.47 μ F
C314	24503041	PF, 0.1 μ F, 63V
C315	24073020	EL, 1000 μ F, ±20%, 10V
C315	24206229	EL, 2.2 μ F, ±20%, 50V
C316	24666101	EL, 100 μ F, ±20%, 16V
C317	24591222	PF, 2200pF
C318	24591182	PF, 1800pF
C319	24667101	EL, 100 μ F, ±20%, 25V
C320	24617820	EL, 100 μ F, ±20%, 50V
C321	24669101	EL, 100 μ F, ±20%, 50V
C322	24567393	PF, 0.039 μ F
C323	24092748	Chip, 0.056 μ F, ±10%, 16V
C324	24567105	PF, 1 μ F

Location No.	Part No.	Description
C325	24082057	PF, 0.22 μ F, 100V
C326	24567334	PF, 0.33 μ F
C327	24567224	PF, 0.22 μ F
C328	24082260	PF, 4700pF, 100V
C329	24669100	EL, 10 μ F, ±20%, 50V
C330	24085946	EL, 10 μ F, ±20%, 16V, Non-Polar
C331	24109333	Chip, 0.033 μ F, ±10%, 25V
C332	24617820	EL, 100 μ F, ±20%, 50V
C333	24693473	PF, 0.047 μ F, 100V
C334	24109471	Chip, 470pF, ±10%
C335	24567224	PF, 0.22 μ F
C336	24666100	EL, 10 μ F, ±20%, 16V
C340	24567224	PF, 0.22 μ F
C350	24669229	EL, 2.2 μ F, ±20%, 50V
C351	24503041	PF, 0.1 μ F, 63V
C352	24666220	EL, 22 μ F, ±20%, 16V
C401	24214332	CD, 3300pF, ±10%, 500V
C402	24092463	Chip, 0.22 μ F, ±10%, 16V
C402	24214391	CD, 390pF, ±10%, 500V
C403	24676220	EL, 22 μ F, ±20%, 100V
C404	24206229	EL, 2.2 μ F, ±20%, 50V
C405	24567124	PF, 0.12 μ F
C406	24109223	Chip, 0.022 μ F, ±10%, 25V
△C407	24082607	PF, 4300pF, ±3%, 1800V
△C408	24820273	PF, 0.027 μ F, 630V
C410	24095900	PF, 3.3 μ F, ±10%, 100V
C410	24108221	Chip, 220pF
C411	24678220	EL, 22 μ F, ±20%, 200V
C412	24828823	PF, 0.082 μ F, 200V
C413	24214221	CD, 220pF, ±10%, 500V
△C414	24082647	PF, 0.27 μ F, 400V
C415	24092484	CD, 1500pF, ±10%, 2kV
C416	24095716	PF, 1.5 μ F, ±10%, 250V
△C417	24082648	PF, 0.3 μ F, 400V
C418	24679330	EL, 33 μ F, ±20%, 250V
C419	24669479	EL, 4.7 μ F, ±20%, 50V
C420	24591223	PF, 0.022 μ F
C423	24640908	EL, 33 μ F, ±20%, 160V
C424	24591102	PF, 1000pF
C426	24211222	CD, 2200pF, ±10%, 2kV

Location No.	Part No.	Description	Location No.	Part No.	Description
C426	24666331	EL, 330 μ F, ±20%, 16V	C503	24203101	EL, 100 μ F, ±20%, 16V
C427	24109103	Chip, 0.01 μ F, ±10%, 25V	C504	24109222	Chip, 2200pF, ±10%
C427	24828473	PF, 0.047 μ F, 200V	C505	24108120	Chip, 12pF
C428	24797010	EL, 1 μ F, ±20%, 50V	C506	24108120	Chip, 12pF
C429	24109103	Chip, 0.01 μ F, ±10%, 25V	C507	24108120	Chip, 12pF
C429	24591153	PF, 0.015 μ F	C508	24100104	Chip, 0.1 μ F, +80%, -20%, 25V
C430	24085903	EL, 1 μ F, ±20%, 50V, Non-Polar	C509	24203101	EL, 100 μ F, ±20%, 16V
C430	24567123	PF, 0.012 μ F	C510	24666101	EL, 100 μ F, ±20%, 16V
C431	24503041	PF, 0.1 μ F, 63V	C510	24092730	Chip, 0.1 μ F, ±10%, 16V
C431	24591102	PF, 1000pF	C511	24109103	Chip, 0.01 μ F, ±10%, 25V
C432	24567103	PF, 0.01 μ F	C511	24203101	EL, 100 μ F, ±20%, 16V
C432	24567333	PF, 0.033 μ F	C512	24206228	EL, 0.22 μ F, ±20%, 50V
C434	24501561	PF, 560pF	C513	24100104	Chip, 0.1 μ F, +80%, -20%, 25V
C435	24501272	PF, 2700pF	C513	24109103	Chip, 0.01 μ F, ±10%, 25V
C436	24669479	EL, 4.7 μ F, ±20%, 50V	C514	24203100	EL, 10 μ F, ±20%, 16V
C437	24567103	PF, 0.01 μ F	C524	24092730	Chip, 0.1 μ F, ±10%, 16V
C438	24591272	PF, 2700pF	C525	24092730	Chip, 0.1 μ F, ±10%, 16V
C439	24669229	EL, 2.2 μ F, ±20%, 50V	C526	24092730	Chip, 0.1 μ F, ±10%, 16V
C440	24669229	EL, 2.2 μ F, ±20%, 50V	C527	24092730	Chip, 0.1 μ F, ±10%, 16V
C441	24501272	PF, 2700pF	C528	24092730	Chip, 0.1 μ F, ±10%, 16V
C442	24501102	PF, 1000pF	C529	24092730	Chip, 0.1 μ F, ±10%, 16V
C443	24503041	PF, 0.1 μ F, 63V	C529	24109103	Chip, 0.01 μ F, ±10%, 25V
C444	24666331	EL, 330 μ F, ±20%, 16V	C530	24669010	EL, 1 μ F, ±20%, 50V
△C445	24567103	PF, 0.01 μ F	C531	24666101	EL, 100 μ F, ±20%, 16V
△C445	24820153	PF, 0.015 μ F, 630V	C532	24666100	EL, 10 μ F, ±20%, 16V
△C446	24501151	PF, 150pF	C535	24092730	Chip, 0.1 μ F, ±10%, 16V
△C446	24820113	PF, 0.011 μ F, 630V	C536	24109103	Chip, 0.01 μ F, ±10%, 25V
△C447	24082611	PF, 6200pF, ±3%, 1800V	C537	24109103	Chip, 0.01 μ F, ±10%, 25V
△C447	24503041	PF, 0.1 μ F, 63V	C547	24109103	Chip, 0.01 μ F, ±10%, 25V
△C448	24666331	EL, 330 μ F, ±20%, 16V	C551	24092730	Chip, 0.1 μ F, ±10%, 16V
△C448	24820822	PF, 0.0082 μ F, 630V	C552	24092730	Chip, 0.1 μ F, ±10%, 16V
△C449	24082592	PF, 1000pF, ±3%, 1800V	C553	24092730	Chip, 0.1 μ F, ±10%, 16V
△C449	24591332	PF, 3300pF	C554	24092730	Chip, 0.1 μ F, ±10%, 16V
C451	24567563	PF, 0.056 μ F	C555	24092730	Chip, 0.1 μ F, ±10%, 16V
C452	24567823	PF, 0.082 μ F	C556	24092730	Chip, 0.1 μ F, ±10%, 16V
C453	24669010	EL, 1 μ F, ±20%, 50V	C563	24206229	EL, 2.2 μ F, ±20%, 50V
C454	24567103	PF, 0.01 μ F	C564	24666100	EL, 10 μ F, ±20%, 16V
C455	24668331	EL, 330 μ F, ±20%, 35V	C565	24669229	EL, 2.2 μ F, ±20%, 50V
C455	24669010	EL, 1 μ F, ±20%, 50V	C566	24669010	EL, 1 μ F, ±20%, 50V
C456	24503041	PF, 0.1 μ F, 63V	C567	24109103	Chip, 0.01 μ F, ±10%, 25V
C456	24666221	EL, 220 μ F, ±20%, 16V	C568	24109103	Chip, 0.01 μ F, ±10%, 25V
C457	24092730	Chip, 0.1 μ F, ±10%, 16V	C569	24109103	Chip, 0.01 μ F, ±10%, 25V
C457	24503041	PF, 0.1 μ F, 63V	C570	24669010	EL, 1 μ F, ±20%, 50V
C458	24092730	Chip, 0.1 μ F, ±10%, 16V	C601	24109102	Chip, 1000pF, ±10%
C458	24666331	EL, 330 μ F, ±20%, 16V	C602	24109102	Chip, 1000pF, ±10%
C459	24105101	Chip, 100pF	C603	24669100	EL, 10 μ F, ±20%, 50V
C460	24109103	Chip, 0.01 μ F, ±10%, 25V	C604	24669100	EL, 10 μ F, ±20%, 50V
C461	24109103	Chip, 0.01 μ F, ±10%, 25V	C605	24667101	EL, 100 μ F, ±20%, 25V
C462	24109103	Chip, 0.01 μ F, ±10%, 25V	C606	24667101	EL, 100 μ F, ±20%, 25V
C463	24105101	Chip, 100pF	C607	24503041	PF, 0.1 μ F, 63V
C464	24666101	EL, 100 μ F, ±20%, 16V	C608	24503041	PF, 0.1 μ F, 63V
C465	24503041	PF, 0.1 μ F, 63V	C609	24669102	EL, 1000 μ F, ±20%, 50V
C467	24436220	CD, 22pF	C610	24669102	EL, 1000 μ F, ±20%, 50V
C468	24567474	PF, 0.47 μ F	C611	24667221	EL, 220 μ F, ±20%, 25V
C469	24666100	EL, 10 μ F, ±20%, 16V	C612	24666221	EL, 220 μ F, ±20%, 16V
C470	24212101	CD, 100pF, ±10%	C621	24206479	EL, 4.7 μ F, ±20%, 50V
C472	24567474	PF, 0.47 μ F	C622	24206108	EL, 0.1 μ F, ±20%, 50V
C481	24666101	EL, 100 μ F, ±20%, 16V	C623	24100472	Chip, 4700pF, +80%, -20%
C482	24591223	PF, 0.022 μ F	C624	24206479	EL, 4.7 μ F, ±20%, 50V
C484	24591102	PF, 1000pF	C625	24206479	EL, 4.7 μ F, ±20%, 50V
C493	24503041	PF, 0.1 μ F, 63V	C626	24206479	EL, 4.7 μ F, ±20%, 50V
C501	24109103	Chip, 0.01 μ F, ±10%, 25V	C627	24206479	EL, 4.7 μ F, ±20%, 50V
C502	24092730	Chip, 0.1 μ F, ±10%, 16V	C628	24206100	EL, 10 μ F, ±20%, 50V

Location No.	Part No.	Description
C629	24206100	EL, 10 μ F, ±20%, 50V
C630	24206108	EL, 0.1 μ F, ±20%, 50V
C631	24100472	Chip, 4700pF, +80%, -20%
C632	24203470	EL, 47 μ F, ±20%, 16V
C633	24567224	PF, 0.22 μ F
C634	24206108	EL, 0.1 μ F, ±20%, 50V
C635	24203220	EL, 22 μ F, ±20%, 16V
C636	24206479	EL, 4.7 μ F, ±20%, 50V
C637	24206100	EL, 10 μ F, ±20%, 50V
C638	24794101	EL, 100 μ F, ±20%, 16V
C639	24109103	Chip, 0.01 μ F, ±10%, 25V
C640	24109223	Chip, 0.022 μ F, ±10%, 25V
C641	24109822	Chip, 8200pF, ±10%, 25V
C642	24206100	EL, 10 μ F, ±20%, 50V
C643	24206479	EL, 4.7 μ F, ±20%, 50V
C644	24206339	EL, 3.3 μ F, ±20%, 50V
C645	24109333	Chip, 0.033 μ F, ±10%, 25V
C646	24109473	Chip, 0.047 μ F, ±10%, 25V
C648	24109393	Chip, 0.033 μ F, ±10%, 25V
C649	24109223	Chip, 0.022 μ F, ±10%, 25V
C650	24109822	Chip, 8200pF, ±10%, 25V
C651	24109103	Chip, 0.01 μ F, ±10%, 25V
C652	24109103	Chip, 0.01 μ F, ±10%, 25V
C653	24100103	Chip, 0.01 μ F, +80%, -20%
C654	24763101	EL, 100 μ F, ±20%, 16V
C661	24206010	EL, 1 μ F, ±20%, 50V
C662	24206010	EL, 1 μ F, ±20%, 50V
C663	24206010	EL, 1 μ F, ±20%, 50V
C664	24669220	EL, 22 μ F, ±20%, 50V
C665	24109103	Chip, 0.01 μ F, ±10%, 25V
C666	24206010	EL, 1 μ F, ±20%, 50V
C680	24669471	EL, 470 μ F, ±20%, 50V
C681	24666100	EL, 10 μ F, ±20%, 16V
C682	24503041	PF, 0.1 μ F, 63V
C690	24109103	Chip, 0.01 μ F, ±10%, 25V
C704	24232103	CD, 0.01 μ F, +80%, -20%
C705	24206479	EL, 4.7 μ F, ±20%, 50V
C707	24797470	EL, 47 μ F, ±20%, 50V
C712	24797470	EL, 47 μ F, ±20%, 50V
C713	24790470	EL, 47 μ F, ±20%, 160V
C715	24214472	CD, 4700pF, ±10%, 500V
C717	24214472	CD, 4700pF, ±10%, 500V
C718	24666470	EL, 47 μ F, ±20%, 16V
C719	24435560	CD, 56pF, 500V
C720	24790220	EL, 22 μ F, ±20%, 160V
C721	24666470	EL, 47 μ F, ±20%, 16V
C722	24436820	CD, 82pF
C726	24212102	CD, 1000pF, ±10%
C760	24797470	EL, 47 μ F, ±20%, 50V
C761	24212102	CD, 1000pF, ±10%
C762	24797470	EL, 47 μ F, ±20%, 50V
C765	24214472	CD, 4700pF, ±10%, 500V
C766	24214472	CD, 4700pF, ±10%, 500V
C767	24790470	EL, 47 μ F, ±20%, 160V
C768	24666470	EL, 47 μ F, ±20%, 16V
C769	24666470	EL, 47 μ F, ±20%, 16V
C770	24435560	CD, 56pF, 500V
C771	24790220	EL, 22 μ F, ±20%, 160V
C780	24797470	EL, 47 μ F, ±20%, 50V
C781	24212102	CD, 1000pF, ±10%
C782	24797470	EL, 47 μ F, ±20%, 50V
C784	24214472	CD, 4700pF, ±10%, 500V
C786	24214472	CD, 4700pF, ±10%, 500V
C787	24790470	EL, 47 μ F, ±20%, 160V

Location No.	Part No.	Description
C788	24666470	EL, 47 μ F, ±20%, 16V
C789	24666470	EL, 47 μ F, ±20%, 16V
C790	24435560	CD, 56pF, 500V
C791	24790220	EL, 22 μ F, ±20%, 160V
C792	24669229	EL, 2.2 μ F, ±20%, 50V
C801	24082001	PF, 0.47 μ F, AC125V
C809	24086067	EL, 1000 μ F, ±20%, 200V
C810	24086067	EL, 1000 μ F, ±20%, 200V
C811	24092597	CD, 4700pF, ±20%, AC250V
C812	24092597	CD, 4700pF, ±20%, AC250V
C813	24092597	CD, 4700pF, ±20%, AC250V
C830	24567334	PF, 0.33 μ F
C831	24666101	EL, 100 μ F, ±20%, 16V
C833	24666470	EL, 47 μ F, ±20%, 16V
C834	24667101	EL, 100 μ F, ±20%, 25V
C835	24667470	EL, 47 μ F, ±20%, 25V
C836	24567334	PF, 0.33 μ F
C840	24073058	EL, 2200 μ F, ±20%, 25V
C842	24664101	EL, 100 μ F, ±20%, 6.3V
C843	24567105	PF, 1 μ F
C857	24668332	EL, 3300 μ F, ±20%, 35V
C858	24668332	EL, 3300 μ F, ±20%, 35V
C860	24214103	CD, 0.01 μ F, ±10%, 500V
C863	24567224	PF, 0.22 μ F
C864	24092474	CD, 220pF, ±10%, 2kV
C866	24567105	PF, 1 μ F
C867	24591472	PF, 4700pF
C868	24669101	EL, 100 μ F, ±20%, 50V
C869	24678229	EL, 2.2 μ F, ±20%, 200V
C870	24082899	PF, 0.068 μ F, 800V
C871	24092484	CD, 1500pF, ±10%, 2kV
C872	24092478	CD, 470pF, ±10%, 2kV
C873	24567224	PF, 0.22 μ F
C874	24212102	CD, 1000pF, ±10%
C876	24567474	PF, 0.47 μ F
C881	24678478	EL, 0.47 μ F, ±20%, 200V
C882	24794220	EL, 22 μ F, ±20%, 16V
C883	24082229	PF, 0.1 μ F, ±10%, 250V
C884	24086916	EL, 330 μ F, ±20%, 160V
C885	24669479	EL, 4.7 μ F, ±20%, 50V
C888	24666100	EL, 10 μ F, ±20%, 16V
C889	24669010	EL, 1 μ F, ±20%, 50V
C890	24669222	EL, 2200 μ F, ±20%, 50V
C894	24668222	EL, 2200 μ F, ±20%, 35V
C895	24666332	EL, 3300 μ F, ±20%, 16V
C898	24212102	CD, 1000pF, ±10%
C901	24211102	CD, 1000pF, ±10%, 2kV
C902	24794101	EL, 100 μ F, ±20%, 16V
C903	24232103	CD, 0.01 μ F, +80%, -20%
C904	24436681	CD, 680pF
C905	24214102	CD, 1000pF, ±10%, 500V
C907	24214101	CD, 100pF, ±10%, 500V
C908	24436390	CD, 39pF
C909	24794221	EL, 220 μ F, ±20%, 16V
C911	24211102	CD, 1000pF, ±10%, 2kV
C912	24794101	EL, 100 μ F, ±20%, 16V
C913	24232103	CD, 0.01 μ F, +80%, -20%
C914	24436821	CD, 820pF
C915	24679330	EL, 33 μ F, ±20%, 250V
C916	24794102	EL, 1000 μ F, ±20%, 16V
C917	24214101	CD, 100pF, ±10%, 500V
C918	24503041	PF, 0.1 μ F, 63V
C919	24794221	EL, 220 μ F, ±20%, 16V
C921	24211102	CD, 1000pF, ±10%, 2kV

Location No.	Part No.	Description	Location No.	Part No.	Description
C922	24794101	EL, 100µF, ±20%, 16V	CA21	24092743	Chip, 0.47µF, +80%, -20%, 10V
C923	24436681	CD, 680pF	CA22	24109103	Chip, 0.01µF, ±10%, 25V
C924	24232103	CD, 0.01µF, +80%, -20%	CA23	24105181	Chip, 180pF
C926	24214101	CD, 100pF, ±10%, 500V	CA24	24092743	Chip, 0.47µF, +80%, -20%, 10V
C927	24503041	PF, 0.1µF, 63V	CA25	24666100	EL, 10µF, ±20%, 16V
C928	24203100	EL, 10µF, ±20%, 16V	CA26	24092538	Chip, 1µF, +80%, -20%, 10V
C929	24794221	EL, 220µF, ±20%, 16V	CA27	24092538	Chip, 1µF, +80%, -20%, 10V
C961	24763102	EL, 1000µF, ±20%, 16V	CA29	24109221	Chip, 220pF, ±10%
C962	24203100	EL, 10µF, ±20%, 16V	CA30	24105101	Chip, 100pF
C963	24503041	PF, 0.1µF, 63V	CA34	24105101	Chip, 100pF
C964	24503041	PF, 0.1µF, 63V	CA45	24666100	EL, 10µF, ±20%, 16V
C7704	24667101	EL, 100µF, ±20%, 25V	CA49	24666100	EL, 10µF, ±20%, 16V
C7705	24567334	PF, 0.33µF	CA50	24100103	Chip, 0.01µF, +80%, -20%
C7706	24567334	PF, 0.33µF	CA52	24109272	Chip, 2700pF, ±10%
C7707	24667101	EL, 100µF, ±20%, 25V	CA54	24105101	Chip, 100pF
C7708	24105150	Chip, 15pF	CA59	24105101	Chip, 100pF
C7709	24105150	Chip, 15pF	CA60	24105101	Chip, 100pF
C7710	24105150	Chip, 15pF	CA61	24666220	EL, 22µF, ±20%, 16V
C7711	24105150	Chip, 15pF	CA64	24109103	Chip, 0.01µF, ±10%, 25V
C7712	24105150	Chip, 15pF	CA68	24666100	EL, 10µF, ±20%, 16V
C7713	24105150	Chip, 15pF	CA69	24109103	Chip, 0.01µF, ±10%, 25V
C7714	24105150	Chip, 15pF	CA71	24105101	Chip, 100pF
C7715	24105150	Chip, 15pF	CA72	24085970	EL, 10µF, ±20%, 16V, Non-Polar
C7716	24105150	Chip, 15pF	CA73	24666100	EL, 10µF, ±20%, 16V
C7717	24105150	Chip, 15pF	CB01	24105101	Chip, 100pF
C7718	24105150	Chip, 15pF	CB02	24105101	Chip, 100pF
C7719	24105150	Chip, 15pF	CB11	24100103	Chip, 0.01µF, +80%, -20%
C7721	24109102	Chip, 1000pF, ±10%	CB11	24794470	EL, 47µF, ±20%, 16V
C7722	24105331	Chip, 330pF	CB12	24666100	EL, 10µF, ±20%, 16V
C7724	24667331	EL, 330µF, ±20%, 25V	CB13	24085970	EL, 10µF, ±20%, 16V, Non-Polar
C7725	24667331	EL, 330µF, ±20%, 25V	CB14	24105100	Chip, 10pF, ±0.5pF
C7726	24109102	Chip, 1000pF, ±10%	CB15	24794100	EL, 10µF, ±20%, 16V
C7727	24105331	Chip, 330pF	CB33	24109103	Chip, 0.01µF, ±10%, 25V
C7729	24109102	Chip, 1000pF, ±10%	CB37	24105101	Chip, 100pF
C7730	24105331	Chip, 330pF	CB38	24105101	Chip, 100pF
C7732	24105331	Chip, 330pF	CB40	24109103	Chip, 0.01µF, ±10%, 25V
C7733	24105331	Chip, 330pF	CB41	24666100	EL, 10µF, ±20%, 16V
C7735	24667331	EL, 330µF, ±20%, 25V	CB42	24109103	Chip, 0.01µF, ±10%, 25V
C7736	24667331	EL, 330µF, ±20%, 25V	CB42	24232103	CD, 0.01µF, +80%, -20%
C7737	24109102	Chip, 1000pF, ±10%	CB43	24109103	Chip, 0.01µF, ±10%, 25V
C7738	24105331	Chip, 330pF	CB62	24105331	Chip, 330pF
C7740	24105331	Chip, 330pF	CB90	24109103	Chip, 0.01µF, ±10%, 25V
C7741	24105331	Chip, 330pF	CB91	24666100	EL, 10µF, ±20%, 16V
C7751	24667101	EL, 100µF, ±20%, 25V	CD01	24206478	EL, 0.47µF, ±20%, 50V
C7752	24567334	PF, 0.33µF	CD02	24206478	EL, 0.47µF, ±20%, 50V
C7753	24567334	PF, 0.33µF	CD03	24503041	PF, 0.1µF, 63V
C7754	24667101	EL, 100µF, ±20%, 25V	CD05	24567103	PF, 0.01µF
C7760	24667470	EL, 47µF, ±20%, 25V	CD06	24206478	EL, 0.47µF, ±20%, 50V
C7761	24667100	EL, 10µF, ±20%, 25V	CD07	24591472	PF, 4700pF
C7763	24667470	EL, 47µF, ±20%, 25V	CD08	24206478	EL, 0.47µF, ±20%, 50V
C7767	24667101	EL, 100µF, ±20%, 25V	CD10	24503041	PF, 0.1µF, 63V
C7768	24667101	EL, 100µF, ±20%, 25V	CD11	24203100	EL, 10µF, ±20%, 16V
C7769	24109103	Chip, 0.01µF, ±10%, 25V	CD12	24203100	EL, 10µF, ±20%, 16V
C7774	24105101	Chip, 100pF	CD13	24666101	EL, 100µF, ±20%, 16V
C7776	24667100	EL, 10µF, ±20%, 25V	CD15	24761102	EL, 1000µF, ±20%, 6.3V
C7779	24105331	Chip, 330pF	CD16	24206479	EL, 4.7µF, ±20%, 50V
C7812	24109103	Chip, 0.01µF, ±10%, 25V	CH001	24100104	Chip, 0.1µF, +80%, -20%, 25V
C7816	24667100	EL, 10µF, ±20%, 25V	CH004	24100104	Chip, 0.1µF, +80%, -20%, 25V
C7817	24109103	Chip, 0.01µF, ±10%, 25V	CH005	24100104	Chip, 0.1µF, +80%, -20%, 25V
CA10	24105101	Chip, 100pF	CH006	24100104	Chip, 0.1µF, +80%, -20%, 25V
CA13	24109221	Chip, 220pF, ±10%			
CA14	24666100	EL, 10µF, ±20%, 16V			
CA18	24666470	EL, 47µF, ±20%, 16V			
CA20	24105181	Chip, 180pF			

Location No.	Part No.	Description	Location No.	Part No.	Description
CH007	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH172	24105331	Chip, 330pF
CH008	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH173	24105102	Chip, 1000pF, 25V
CH009	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH174	24105391	Chip, 390pF
CH010	24092743	Chip, 0.47μF, +80%, -20%, 10V	CH175	24105220	Chip, 22pF
CH011	24762221	EL, 220μF, ±20%, 10V	CH176	24105391	Chip, 390pF
CH012	24763101	EL, 100μF, ±20%, 16V	CH177	24105220	Chip, 22pF
CH013	24763101	EL, 100μF, ±20%, 16V	CH178	24105151	Chip, 150pF
CH014	24108101	Chip, 100pF	CH179	24105102	Chip, 1000pF, 25V
CH015	24108330	Chip, 33pF	CH180	24105681	Chip, 680pF
CH016	24108330	Chip, 33pF	CH181	24105681	Chip, 680pF
CH017	24108330	Chip, 33pF	CH182	24105391	Chip, 390pF
CH018	24108330	Chip, 33pF	CH183	24105220	Chip, 22pF
CH019	24108330	Chip, 33pF	CH184	24105391	Chip, 390pF
CH020	24108330	Chip, 33pF	CH185	24105220	Chip, 22pF
CH040	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH186	24105331	Chip, 330pF
CH041	24108101	Chip, 100pF	CH187	24105102	Chip, 1000pF, 25V
CH042	24108101	Chip, 100pF	CH188	24105151	Chip, 150pF
CH043	24108101	Chip, 100pF	CH189	24105102	Chip, 1000pF, 25V
CH044	24108101	Chip, 100pF	CH190	24105681	Chip, 680pF
CH045	24108101	Chip, 100pF	CH191	24105681	Chip, 680pF
CH046	24108101	Chip, 100pF	CH192	24105391	Chip, 390pF
CH047	24108101	Chip, 100pF	CH193	24105220	Chip, 22pF
CH048	24108101	Chip, 100pF	CH194	24105331	Chip, 330pF
CH051	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH195	24105102	Chip, 1000pF, 25V
CH052	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH196	24105391	Chip, 390pF
CH053	24105070	Chip, 7pF, ±0.5pF	CH197	24105220	Chip, 22pF
CH061	24109103	Chip, 0.01μF, ±10%, 25V	CH198	24105151	Chip, 150pF
CH062	24092730	Chip, 0.1μF, ±10%, 16V	CH199	24105102	Chip, 1000pF, 25V
CH063	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH200	24105681	Chip, 680pF
CH101	24105070	Chip, 7pF, ±0.5pF	CH201	24105681	Chip, 680pF
CH102	24105070	Chip, 7pF, ±0.5pF	CH202	24105220	Chip, 22pF
CH120	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH203	24105391	Chip, 390pF
CH121	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH204	24105391	Chip, 390pF
CH122	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH205	24105220	Chip, 22pF
CH123	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH206	24105331	Chip, 330pF
CH124	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH207	24105102	Chip, 1000pF, 25V
CH125	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH208	24105151	Chip, 150pF
CH126	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH209	24105102	Chip, 1000pF, 25V
CH127	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH210	24105681	Chip, 680pF
CH128	24108221	Chip, 220pF	CH211	24105681	Chip, 680pF
CH129	24108221	Chip, 220pF	CH212	24105331	Chip, 330pF
CH140	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH213	24105102	Chip, 1000pF, 25V
CH141	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH223	24105391	Chip, 390pF
CH142	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH224	24105220	Chip, 22pF
CH143	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH225	24105391	Chip, 390pF
CH144	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH226	24105220	Chip, 22pF
CH145	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH227	24105151	Chip, 150pF
CH146	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH228	24105102	Chip, 1000pF, 25V
CH147	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH229	24105681	Chip, 680pF
CH148	24108221	Chip, 220pF	CH230	24105681	Chip, 680pF
CH149	24108221	Chip, 220pF	CH231	24105391	Chip, 390pF
CH160	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH232	24105220	Chip, 22pF
CH161	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH233	24105391	Chip, 390pF
CH162	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH234	24105220	Chip, 22pF
CH163	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH235	24105331	Chip, 330pF
CH164	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH236	24105102	Chip, 1000pF, 25V
CH165	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH237	24105151	Chip, 150pF
CH166	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH238	24105102	Chip, 1000pF, 25V
CH167	24100104	Chip, 0.1μF, +80%, -20%, 25V	CH241	24100104	Chip, 0.1μF, +80%, -20%, 25V
CH168	24108221	Chip, 220pF	CH245	24100104	Chip, 0.1μF, +80%, -20%, 25V
CH169	24108221	Chip, 220pF	CH247	24100104	Chip, 0.1μF, +80%, -20%, 25V
CH170	24105681	Chip, 680pF	CH248	24100104	Chip, 0.1μF, +80%, -20%, 25V
CH171	24105681	Chip, 680pF	CH249	24092730	Chip, 0.1μF, ±10%, 16V
			CH250	24092730	Chip, 0.1μF, ±10%, 16V

Location No.	Part No.	Description	Location No.	Part No.	Description
CM01	24100104	Chip, 0.1μF, +80%, -20%, 25V	CV39	24212102	CD, 1000pF, ±10%
CM02	24100104	Chip, 0.1μF, +80%, -20%, 25V	CV40	24763101	EL, 100μF, ±20%, 16V
CM07	24100104	Chip, 0.1μF, +80%, -20%, 25V	CV41	24232103	CD, 0.01μF, +80%, -20%
CM08	24100104	Chip, 0.1μF, +80%, -20%, 25V	CV46	24232103	CD, 0.01μF, +80%, -20%
CM09	24100104	Chip, 0.1μF, +80%, -20%, 25V	CV60	24203470	EL, 47μF, ±20%, 16V
CR12	24092730	Chip, 0.1μF, ±10%, 16V	CV61	24203470	EL, 47μF, ±20%, 16V
CR13	24092730	Chip, 0.1μF, ±10%, 16V	CV62	24232103	CD, 0.01μF, +80%, -20%
CR14	24092730	Chip, 0.1μF, ±10%, 16V	CV63	24109103	Chip, 0.01μF, ±10%, 25V
CR15	24092730	Chip, 0.1μF, ±10%, 16V	CV64	24206100	EL, 10μF, ±20%, 50V
CR16	24092730	Chip, 0.1μF, ±10%, 16V	CV65	24591122	PF, 1200pF
CR17	24092730	Chip, 0.1μF, ±10%, 16V	CV66	24436561	CD, 560pF
CS03	24436221	CD, 220pF	CV67	24591102	PF, 1000pF
CS04	24206010	EL, 1μF, ±20%, 50V	CV68	24206100	EL, 1μF, ±20%, 50V
CS07	24436221	CD, 220pF	CV78	24109103	Chip, 0.01μF, ±10%, 25V
CS08	24206010	EL, 1μF, ±20%, 50V	CV100	24206229	EL, 2.2μF, ±20%, 50V
CS09	24436331	CD, 330pF	CV135	24203470	EL, 47μF, ±20%, 16V
CS10	24206229	EL, 2.2μF, ±20%, 50V	CV136	24203470	EL, 47μF, ±20%, 16V
CS11	24206010	EL, 1μF, ±20%, 50V	CV137	24203470	EL, 47μF, ±20%, 16V
CS12	24436221	CD, 220pF	CV138	24203470	EL, 47μF, ±20%, 16V
CS13	24206010	EL, 1μF, ±20%, 50V	CV501	24203101	EL, 100μF, ±20%, 16V
CS14	24436221	CD, 220pF	CV503	24203100	EL, 10μF, ±20%, 16V
CS15	24436331	CD, 330pF	CV505	24109103	Chip, 0.01μF, ±10%, 25V
CS16	24206229	EL, 2.2μF, ±20%, 50V	CW08	24794101	EL, 100μF, ±20%, 16V
CS21	24436101	CD, 100pF	CW09	24109103	Chip, 0.01μF, ±10%, 25V
CS22	24436101	CD, 100pF	CX11	24667470	EL, 47μF, ±20%, 25V
CS24	24436331	CD, 330pF	CX13	24669470	EL, 47μF, ±20%, 50V
CS25	24206229	EL, 2.2μF, ±20%, 50V	CX102	24092441	Chip, 1μF, +80%, -20%, 16V
CS28	24436331	CD, 330pF	CX103	24203330	EL, 33μF, ±20%, 16V
CS29	24436331	CD, 330pF	CX104	24092441	Chip, 1μF, +80%, -20%, 16V
CS32	24203100	EL, 10μF, ±20%, 16V	CX105	24666101	EL, 100μF, ±20%, 16V
CS33	24203100	EL, 10μF, ±20%, 16V	CX106	24105181	Chip, 180pF
CS34	24436331	CD, 330pF	CX107	24105820	Chip, 820pF
CS35	24206229	EL, 2.2μF, ±20%, 50V	CX108	24105121	Chip, 120pF
CS36	24206229	EL, 2.2μF, ±20%, 50V	CX109	24100104	Chip, 0.1μF, +80%, -20%, 25V
CS38	24206229	EL, 2.2μF, ±20%, 50V	CX112	24100333	Chip, 0.033μF, +80%, -20%, 25V
CS51	24206229	EL, 2.2μF, ±20%, 50V	CX113	24100104	Chip, 0.1μF, +80%, -20%, 25V
CS52	24206229	EL, 2.2μF, ±20%, 50V	CX114	24100104	Chip, 0.1μF, +80%, -20%, 25V
CS53	24206229	EL, 2.2μF, ±20%, 50V	CX115	24202220	EL, 22μF, ±20%, 10V
CS54	24206229	EL, 2.2μF, ±20%, 50V	CX116	24100104	Chip, 0.1μF, +80%, -20%, 25V
CS55	24436331	CD, 330pF	CX132	24092441	Chip, 1μF, +80%, -20%, 16V
CS56	24436331	CD, 330pF	CX133	24203330	EL, 33μF, ±20%, 16V
CS57	24436331	CD, 330pF	CX134	24092441	Chip, 1μF, +80%, -20%, 16V
CS58	24436331	CD, 330pF	CX136	24105121	Chip, 120pF
CV01	24085981	EL, 10μF, ±20%, 16V, Non-Polar	CX137	24105151	Chip, 150pF
CV02	24232103	CD, 0.01μF, +80%, -20%	CX138	24105471	Chip, 470pF
CV03	24085981	EL, 10μF, ±20%, 16V, Non-Polar	CX142	24092616	Chip, 0.33μF, ±10%, 16V
CV04	24203100	EL, 10μF, ±20%, 16V	CX145	24202220	EL, 22μF, ±20%, 10V
CV05	24203100	EL, 10μF, ±20%, 16V	CX146	24100104	Chip, 0.1μF, +80%, -20%, 25V
CV08	24666102	EL, 1000μF, ±20%, 16V	CX162	24092441	Chip, 1μF, +80%, -20%, 16V
CV10	24203100	EL, 10μF, ±20%, 16V	CX163	24203330	EL, 33μF, ±20%, 16V
CV10	24794100	EL, 10μF, ±20%, 16V	CX164	24092441	Chip, 1μF, +80%, -20%, 16V
CV11	24232103	CD, 0.01μF, +80%, -20%	CX166	24105121	Chip, 120pF
CV12	24232103	CD, 0.01μF, +80%, -20%	CX167	24105151	Chip, 150pF
CV17	24203100	EL, 10μF, ±20%, 16V	CX168	24105331	Chip, 330pF
CV21	24203100	EL, 10μF, ±20%, 16V	CX172	24092616	Chip, 0.33μF, ±10%, 16V
CV22	24203100	EL, 10μF, ±20%, 16V	CX175	24202220	EL, 22μF, ±20%, 10V
CV23	24232103	CD, 0.01μF, +80%, -20%	CX176	24100104	Chip, 0.1μF, +80%, -20%, 25V
CV24	24212102	CD, 1000pF, ±10%	CX191	24100104	Chip, 0.1μF, +80%, -20%, 25V
CV27	24762471	EL, 470μF, ±20%, 10V	CX192	24100104	Chip, 0.1μF, +80%, -20%, 25V
CV29	24763101	EL, 100μF, ±20%, 16V	CX193	24100104	Chip, 0.1μF, +80%, -20%, 25V
CV30	24232103	CD, 0.01μF, +80%, -20%	CX195	24105100	Chip, 10pF, ±0.5pF
CV38	24203101	EL, 100μF, ±20%, 16V	CX196	24105100	Chip, 10pF, ±0.5pF
			CX211	24092538	Chip, 1μF, +80%, -20%, 10V

Location No.	Part No.	Description
CX222	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX223	24669010	EL, 1μF, ±20%, 50V
CX224	24109103	Chip, 0.01μF, ±10%, 25V
CX225	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX226	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX242	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX243	24666100	EL, 10μF, ±20%, 16V
CX244	24092730	Chip, 0.1μF, ±10%, 16V
CX245	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX246	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX301	24763221	EL, 220μF, ±20%, 16V
CX303	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX306	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX311	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX313	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX315	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX317	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX319	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX320	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX321	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX322	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX323	24092538	Chip, 1μF, +80%, -20%, 10V
CX326	24092538	Chip, 1μF, +80%, -20%, 10V
CX327	24105470	Chip, 47pF
CX328	24092730	Chip, 0.1μF, ±10%, 16V
CX329	24092730	Chip, 0.1μF, ±10%, 16V
CX331	24092538	Chip, 1μF, +80%, -20%, 10V
CX332	24105330	Chip, 33pF
CX333	24092730	Chip, 0.1μF, ±10%, 16V
CX334	24092730	Chip, 0.1μF, ±10%, 16V
CX341	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX342	24092730	Chip, 0.1μF, ±10%, 16V
CX343	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX344	24092730	Chip, 0.1μF, ±10%, 16V
CX345	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX346	24092730	Chip, 0.1μF, ±10%, 16V
CX354	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX361	24766470	EL, 47μF, ±20%, 50V
CX364	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX366	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX368	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX372	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX399	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX471	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX473	24092538	Chip, 1μF, +80%, -20%, 10V
CX521	24105820	Chip, 820pF
CX522	24105560	Chip, 56pF
CX523	24105270	Chip, 27pF
CX531	24105101	Chip, 100pF
CX532	24105330	Chip, 33pF
CX541	24105101	Chip, 100pF
CX542	24105330	Chip, 33pF
CX562	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX564	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX811	24105330	Chip, 33pF
CX812	24105330	Chip, 33pF
CX821	24105101	Chip, 100pF
CX822	24105101	Chip, 100pF
CX823	24105101	Chip, 100pF
CX824	24105221	Chip, 220pF
CX825	24105221	Chip, 220pF
CX826	24105221	Chip, 220pF
CX827	24105221	Chip, 220pF
CX829	24105221	Chip, 220pF

Location No.	Part No.	Description
CX844	24105221	Chip, 220pF
CX845	24105221	Chip, 220pF
CX891	24100104	Chip, 0.1μF, +80%, -20%, 25V
CX904	24109103	Chip, 0.01μF, ±10%, 25V
CY21	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY22	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY23	24763221	EL, 220μF, ±20%, 16V
CY24	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY25	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY26	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY27	24092730	Chip, 0.1μF, ±10%, 16V
CY28	24092730	Chip, 0.1μF, ±10%, 16V
CY29	24092730	Chip, 0.1μF, ±10%, 16V
CY32	24762102	EL, 1000μF, ±20%, 10V
CY33	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY35	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY36	24108120	Chip, 12pF
CY37	24108120	Chip, 12pF
CY38	24108120	Chip, 12pF
CY39	24206228	EL, 0.22μF, ±20%, 50V
CY40	24109222	Chip, 2200pF, ±10%
CY40	24206100	EL, 10μF, ±20%, 50V
CY41	24109103	Chip, 0.01μF, ±10%, 25V
CY42	24206229	EL, 2.2μF, ±20%, 50V
CY43	24092463	Chip, 0.22μF, ±10%, 16V
CY44	24206229	EL, 2.2μF, ±20%, 50V
CY45	24109223	Chip, 0.022μF, ±10%, 25V
CY105	24108221	Chip, 220pF
CY120	24092538	Chip, 1μF, +80%, -20%, 10V
CY121	24108101	Chip, 100pF
CY122	24092538	Chip, 1μF, +80%, -20%, 10V
CY132	24092730	Chip, 0.1μF, ±10%, 16V
CY133	24092730	Chip, 0.1μF, ±10%, 16V
CY134	24092730	Chip, 0.1μF, ±10%, 16V
CY149	24108330	Chip, 33pF
CY155	24792101	EL, 100μF, ±20%, 6.3V
CY157	24108330	Chip, 33pF
CY158	24108330	Chip, 33pF
CY160	24092538	Chip, 1μF, +80%, -20%, 10V
CY162	24092538	Chip, 1μF, +80%, -20%, 10V
CY163	24092538	Chip, 1μF, +80%, -20%, 10V
CY164	24092538	Chip, 1μF, +80%, -20%, 10V
CY165	24092538	Chip, 1μF, +80%, -20%, 10V
CY166	24202221	EL, 220μF, ±20%, 10V
CY167	24092538	Chip, 1μF, +80%, -20%, 10V
CY168	24092538	Chip, 1μF, +80%, -20%, 10V
CY169	24092538	Chip, 1μF, +80%, -20%, 10V
CY170	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY171	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY172	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY173	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY174	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY175	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY176	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY177	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY178	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY179	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY180	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY181	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY182	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY183	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY184	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY185	24761471	EL, 470μF, ±20%, 6.3V
CY186	24100104	Chip, 0.1μF, +80%, -20%, 25V

Location No.	Part No.	Description	Location No.	Part No.	Description
CY189	24092293	Chip, 0.1μF, +80%, -20%, 25V	CY825	24092538	Chip, 1μF, +80%, -20%, 10V
CY202	24092730	Chip, 0.1μF, ±10%, 16V	CY826	24108330	Chip, 33pF
CY203	24092730	Chip, 0.1μF, ±10%, 16V	CY827	24108330	Chip, 33pF
CY204	24092730	Chip, 0.1μF, ±10%, 16V	CY828	24108330	Chip, 33pF
CY205	24108101	Chip, 100pF	CY829	24108330	Chip, 33pF
CY206	24100104	Chip, 0.1μF, +80%, -20%, 25V	CY830	24108330	Chip, 33pF
CY207	24202101	EL, 100μF, ±20%, 10V	CY900	24761471	EL, 470μF, ±20%, 6.3V
CY251	24109472	Chip, 4700pF, ±10%	CY909	24092730	Chip, 0.1μF, ±10%, 16V
CY252	24109472	Chip, 4700pF, ±10%	CZ02	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY253	24109472	Chip, 4700pF, ±10%	CZ03	24092730	Chip, 0.1μF, ±10%, 16V
CY254	24109472	Chip, 4700pF, ±10%	CZ04	24105181	Chip, 180pF
CY255	24109472	Chip, 4700pF, ±10%	CZ05	24105680	Chip, 68pF
CY256	24109472	Chip, 4700pF, ±10%	CZ06	24108330	Chip, 33pF
CY257	24100104	Chip, 0.1μF, +80%, -20%, 25V	CZ08	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY300	24201101	EL, 100μF, 6.3V	CZ09	24109103	Chip, 0.01μF, ±10%, 25V
CY301	24092538	Chip, 1μF, +80%, -20%, 10V	CZ10	24203101	EL, 100μF, ±20%, 16V
CY304	24203100	EL, 10μF, ±20%, 16V	CZ11	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY305	24092730	Chip, 0.1μF, ±10%, 16V	CZ12	24105101	Chip, 100pF
CY307	24108330	Chip, 33pF	CZ13	24105101	Chip, 100pF
CY308	24100104	Chip, 0.1μF, +80%, -20%, 25V	CZ14	24108151	Chip, 150pF
CY330	24201101	EL, 100μF, 6.3V	CZ27	24092538	Chip, 1μF, +80%, -20%, 10V
CY331	24092538	Chip, 1μF, +80%, -20%, 10V	CZ28	24109103	Chip, 0.01μF, ±10%, 25V
CY332	24092538	Chip, 1μF, +80%, -20%, 10V	CZ29	24092538	Chip, 1μF, +80%, -20%, 10V
CY333	24201101	EL, 100μF, 6.3V	CZ30	24092730	Chip, 0.1μF, ±10%, 16V
CY334	24203100	EL, 10μF, ±20%, 16V	CZ31	24092730	Chip, 0.1μF, ±10%, 16V
CY335	24092730	Chip, 0.1μF, ±10%, 16V	CZ32	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY337	24108330	Chip, 33pF	CZ33	24109102	Chip, 1000pF, ±10%
CY338	24100104	Chip, 0.1μF, +80%, -20%, 25V	CZ34	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY339	24100104	Chip, 0.1μF, +80%, -20%, 25V	CZ35	24206010	EL, 1μF, ±20%, 50V
CY340	24201101	EL, 100μF, 6.3V	CZ36	24761471	EL, 470μF, ±20%, 6.3V
CY341	24092538	Chip, 1μF, +80%, -20%, 10V	CZ37	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY344	24203100	EL, 10μF, ±20%, 16V	CZ38	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY345	24092730	Chip, 0.1μF, ±10%, 16V	CZ39	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY347	24108330	Chip, 33pF	CZ40	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY348	24100104	Chip, 0.1μF, +80%, -20%, 25V	CZ41	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY439	24108330	Chip, 33pF	CZ42	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY440	24108330	Chip, 33pF	CZ43	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY501	24203101	EL, 100μF, ±20%, 16V	CZ44	24092730	Chip, 0.1μF, ±10%, 16V
CY502	24203100	EL, 10μF, ±20%, 16V	CZ45	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY505	24109103	Chip, 0.01μF, ±10%, 25V	CZ46	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY511	24108101	Chip, 100pF	CZ47	24108820	Chip, 82pF
CY515	24092730	Chip, 0.1μF, ±10%, 16V	CZ48	24092730	Chip, 0.1μF, ±10%, 16V
CY519	24092730	Chip, 0.1μF, ±10%, 16V	CZ49	24092730	Chip, 0.1μF, ±10%, 16V
CY671	24092730	Chip, 0.1μF, ±10%, 16V	CZ50	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY672	24092730	Chip, 0.1μF, ±10%, 16V	CZ51	24092730	Chip, 0.1μF, ±10%, 16V
CY673	24761471	EL, 470μF, ±20%, 6.3V	CZ52	24092730	Chip, 0.1μF, ±10%, 16V
CY674	24092730	Chip, 0.1μF, ±10%, 16V	CZ54	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY675	24092730	Chip, 0.1μF, ±10%, 16V	CZ57	24105181	Chip, 180pF
CY702	24092730	Chip, 0.1μF, ±10%, 16V	CZ58	24105560	Chip, 56pF
CY703	24092730	Chip, 0.1μF, ±10%, 16V	CZ60	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY711	24092730	Chip, 0.1μF, ±10%, 16V	CZ77	24092730	Chip, 0.1μF, ±10%, 16V
CY712	24092730	Chip, 0.1μF, ±10%, 16V	CZ96	24105270	Chip, 27pF
CY713	24092730	Chip, 0.1μF, ±10%, 16V	CZ101	24092441	Chip, 1μF, +80%, -20%, 16V
CY720	24092730	Chip, 0.1μF, ±10%, 16V	CZ102	24203101	EL, 100μF, ±20%, 16V
CY721	24092730	Chip, 0.1μF, ±10%, 16V	CZ103	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY722	24092730	Chip, 0.1μF, ±10%, 16V	CZ104	24109103	Chip, 0.01μF, ±10%, 25V
CY733	24092730	Chip, 0.1μF, ±10%, 16V	CZ105	24109103	Chip, 0.01μF, ±10%, 25V
CY803	24092730	Chip, 0.1μF, ±10%, 16V	CZ106	24109103	Chip, 0.01μF, ±10%, 25V
CY804	24092730	Chip, 0.1μF, ±10%, 16V	CZ108	24100104	Chip, 0.1μF, +80%, -20%, 25V
CY806	24100104	Chip, 0.1μF, +80%, -20%, 25V	CZ109	24108101	Chip, 100pF
CY807	24092538	Chip, 1μF, +80%, -20%, 10V	CZ111	24109103	Chip, 0.01μF, ±10%, 25V
CY808	24100104	Chip, 0.1μF, +80%, -20%, 25V	CZ112	24105181	Chip, 180pF
CY813	24092538	Chip, 1μF, +80%, -20%, 10V	CZ113	24109103	Chip, 0.01μF, ±10%, 25V
CY822	24108330	Chip, 33pF	CZ114	24109103	Chip, 0.01μF, ±10%, 25V

Location No.	Part No.	Description	Location No.	Part No.	Description
CZ115	24105390	Chip, 39pF	R326	24366103	CF, 10k ohm
CZ116	24108470	Chip, 47pF	R327	24366103	CF, 10k ohm
CZ117	24105680	Chip, 68pF	R328	24366123	CF, 12k ohm
CZ800	24108330	Chip, 33pF	R329	24366103	CF, 10k ohm
CZ802	24108330	Chip, 33pF	R330	24019119	MF, 30k ohm, 1/6W
CZ804	24108330	Chip, 33pF	R331	24019119	MF, 30k ohm, 1/6W
CZ805	24108330	Chip, 33pF	R332	24000525	MF, 4700 ohm, 1/4W
CZ806	24108330	Chip, 33pF	R333	24366103	CF, 10k ohm
CZ809	24108330	Chip, 33pF	R334	24872102	Chip, 1k ohm, 1/16W
CZ810	24108330	Chip, 33pF	R335	24872102	Chip, 1k ohm, 1/16W
CZ811	24108330	Chip, 33pF	R336	24872102	Chip, 1k ohm, 1/16W
CZ812	24108330	Chip, 33pF	R337	24321129	MF, 1.2 ohm, 1/2W
RESISTORS					
R101	24383183	OMF, 18k ohm, 2W	R338	24366183	CF, 18k ohm
R150	24366101	CF, 100 ohm	R339	24366393	CF, 39k ohm
R151	24366562	CF, 5600 ohm	R340	24366824	CF, 820k ohm
R152	24366103	CF, 10k ohm	R341	24366273	CF, 27k ohm
R201	24011101	Chip, 100 ohm, 1/20W	R342	24366822	CF, 8200 ohm
R202	24011471	Chip, 470 ohm, 1/20W	R343	24366102	CF, 1k ohm
R203	24000445	Chip Jumper, 1680 Type	R344	24382151	OMF, 150 ohm, 1W
R204	24000445	Chip Jumper, 1680 Type	R345	24322828	MF, 0.82 ohm, 1W
R205	24872101	Chip, 100 ohm, 1/16W	R346	24366100	CF, 10 ohm
R206	24872102	Chip, 1k ohm, 1/16W	R347	24366103	CF, 10k ohm
R207	24011101	Chip, 100 ohm, 1/20W	R348	24366103	CF, 10k ohm
R208	24011102	Chip, 1k ohm, 1/20W	R349	24366392	CF, 3900 ohm
R209	24011102	Chip, 1k ohm, 1/20W	R350	24366822	CF, 8200 ohm
R210	24011102	Chip, 1k ohm, 1/20W	R351	24366472	CF, 4700 ohm
R212	24011103	Chip, 10k ohm, 1/20W	R351	24872102	Chip, 1k ohm, 1/16W
R213	24011123	Chip, 12k ohm, 1/20W	R352	24872102	Chip, 1k ohm, 1/16W
R214	24011222	Chip, 2200 ohm, 1/20W	R353	24872103	Chip, 10k ohm, 1/16W
R215	24011101	Chip, 100 ohm, 1/20W	R354	24872103	Chip, 10k ohm, 1/16W
R241	24367103	CF, 10k ohm, ±2%	R355	24872103	Chip, 10k ohm, 1/16W
R242	24367223	CF, 22k ohm, ±2%	R357	24872472	Chip, 4700 ohm, 1/16W
R243	24367223	CF, 22k ohm, ±2%	R358	24872103	Chip, 10k ohm, 1/16W
R244	24367103	CF, 10k ohm, ±2%	R360	24366103	CF, 10k ohm
R245	24367333	CF, 33k ohm, ±2%	R361	24366103	CF, 10k ohm
R247	24366474	CF, 470k ohm	R362	24366103	CF, 10k ohm
R248	24366393	CF, 39k ohm	R363	24366682	CF, 6800 ohm
R249	24367123	CF, 12k ohm, ±2%	R364	24366103	CF, 10k ohm
R283	24011221	Chip, 220 ohm, 1/20W	R370	24366102	CF, 1k ohm
R284	24011221	Chip, 220 ohm, 1/20W	R371	24366823	CF, 82k ohm
R285	24011221	Chip, 220 ohm, 1/20W	R372	24366332	CF, 3300 ohm
R301	24366103	CF, 10k ohm	R373	24366823	CF, 82k ohm
R302	24366101	CF, 100 ohm	R374	24366104	CF, 100k ohm
R303	24366102	CF, 1k ohm	R375	24366153	CF, 15k ohm
R304	24366103	CF, 10k ohm	R376	24366333	CF, 33k ohm
R305	24366113	CF, 11k ohm	R378	24366103	CF, 10k ohm
R307	24366471	CF, 470 ohm	R381	24366103	CF, 10k ohm
R308	24366471	CF, 470 ohm	R382	24366682	CF, 6800 ohm
R310	24366562	CF, 5600 ohm	R385	24872472	Chip, 4700 ohm, 1/16W
R312	24366103	CF, 10k ohm	R386	24366103	CF, 10k ohm
R314	24011101	Chip, 100 ohm, 1/20W	R387	24366102	CF, 1k ohm
R314	24366473	CF, 47k ohm	R401	24011361	Chip, 360 ohm, 1/20W
R315	24011474	Chip, 470k ohm, 1/20W	R402	24011103	Chip, 10k ohm, 1/20W
R315	24366821	CF, 820 ohm	R403	24011272	Chip, 2700 ohm, 1/20W
R316	24366102	CF, 1k ohm	R403	24553101	OMF, 100 ohm, 1W
R318	24366153	CF, 15k ohm	R404	24383101	OMF, 100 ohm, 2W
R320	24000249	MF, 47k ohm, 1/4W	R406	24382222	OMF, 2200 ohm, 1W
R321	24366472	CF, 4700 ohm	R407	24381100	OMF, 10 ohm, 1/2W
R322	24000371	MF, 3600 ohm, 1/4W	R408	24366101	CF, 100 ohm
R323	24000639	MF, 22k ohm, 1/4W	R409	24011102	Chip, 1k ohm, 1/20W
R324	24366103	CF, 10k ohm	R409	24555220	OMF, 22 ohm, 3W
R325	24366472	CF, 4700 ohm	R410	24555220	OMF, 22 ohm, 3W
			R411	24323479	MF, 4.7 ohm, 2W

Location No.	Part No.	Description	Location No.	Part No.	Description
R412	24366101	CF, 100 ohm	R503	24011103	Chip, 10k ohm, 1/20W
R413	24011182	Chip, 1800 ohm, 1/20W	R505	24011152	Chip, 1500 ohm, 1/20W
R413	24366272	CF, 2700 ohm	R506	24011272	Chip, 2700 ohm, 1/20W
R414	24366101	CF, 100 ohm	R508	24011102	Chip, 1k ohm, 1/20W
R416	24383680	OMF, 68 ohm, 2W	R509	24011102	Chip, 1k ohm, 1/20W
R417	24366101	CF, 100 ohm	R510	24011471	Chip, 470 ohm, 1/20W
R419	24942102	CC, 1k ohm, 1/2W	R511	24011103	Chip, 10k ohm, 1/20W
R420	24382473	OMF, 47k ohm, 1W	R512	24011103	Chip, 10k ohm, 1/20W
R421	24377224	CF, 220k ohm, 1W	R520	24011101	Chip, 100 ohm, 1/20W
R422	24376104	CF, 100k ohm, 1/2W	R520	24872101	Chip, 100 ohm, 1/16W
R423	24376104	CF, 100k ohm, 1/2W	R521	24011101	Chip, 100 ohm, 1/20W
R424	24383898	MF, 0.39 ohm, 1W	R521	24872101	Chip, 100 ohm, 1/16W
R425	24533102	FR, 1k ohm, 2W	R522	24872102	Chip, 1k ohm, 1/16W
R426	24019254	FR, 10ohm, 1/4W	R523	24872101	Chip, 100 ohm, 1/16W
R427	24942102	CC, 1k ohm, 1/2W	R524	24872102	Chip, 1k ohm, 1/16W
R428	24310109	MF, 1.0 ohm, 1/2W	R525	24872101	Chip, 100 ohm, 1/16W
R430	24383153	OMF, 15k ohm, 2W	R526	24872102	Chip, 1k ohm, 1/16W
R431	24383102	OMF, 1k ohm, 2W	R527	24872101	Chip, 100 ohm, 1/16W
R432	24376274	CF, 270k ohm, 1/2W	R530	24011103	Chip, 10k ohm, 1/20W
R433	24376274	CF, 270k ohm, 1/2W	R530	24872101	Chip, 100 ohm, 1/16W
R434	24376274	CF, 270k ohm, 1/2W	R531	24011103	Chip, 10k ohm, 1/20W
R435	24366101	CF, 100 ohm	R531	24872101	Chip, 100 ohm, 1/16W
R436	24382561	OMF, 560 ohm, 1W	R532	24011103	Chip, 10k ohm, 1/20W
R437	24382561	OMF, 560 ohm, 1W	R532	24872101	Chip, 100 ohm, 1/16W
R438	24382561	OMF, 560 ohm, 1W	R533	24552471	OMF, 470 ohm, 1/2W
R439	24366103	CF, 10k ohm	R534	24552471	OMF, 470 ohm, 1/2W
R440	24366103	CF, 10k ohm	R535	24552471	OMF, 470 ohm, 1/2W
R441	24366474	CF, 470k ohm	R536	24872272	Chip, 2700 ohm, 1/16W
R442	24366103	CF, 10k ohm	R537	24872472	Chip, 4700 ohm, 1/16W
R443	24366562	CF, 5600 ohm	R538	24872103	Chip, 10k ohm, 1/16W
R444	24366562	CF, 5600 ohm	R539	24552331	OMF, 330 ohm, 1/2W
R445	24366472	CF, 4700 ohm	R540	24872103	Chip, 10k ohm, 1/16W
R446	24366103	CF, 10k ohm	R562	24872101	Chip, 100 ohm, 1/16W
R447	24366152	CF, 1500 ohm	R601	24872153	Chip, 15k ohm, 1/16W
R452	24366103	CF, 10k ohm	R602	24872153	Chip, 15k ohm, 1/16W
R453	24366472	CF, 4700 ohm	R603	24872183	Chip, 18k ohm, 1/16W
R454	24366562	CF, 5600 ohm	R604	24872183	Chip, 18k ohm, 1/16W
R455	24019259	FR, 27ohm, 1/4W	R609	24872229	Chip, 2.2 ohm, 1/16W
R456	24366123	CF, 12k ohm	R610	24872229	Chip, 2.2 ohm, 1/16W
R457	24366472	CF, 4700 ohm	R611	24872562	Chip, 5600 ohm, 1/16W
R461	24366102	CF, 1k ohm	R612	24872562	Chip, 5600 ohm, 1/16W
R462	24366472	CF, 4700 ohm	R613	24872222	Chip, 2200 ohm, 1/16W
R470	24322568	MF, 0.56 ohm, 1W	R621	24872101	Chip, 100 ohm, 1/16W
R471	24552271	OMF, 270 ohm, 1/2W	R622	24872105	Chip, 1M ohm, 1/16W
R473	24366102	CF, 1k ohm	R623	24872101	Chip, 100 ohm, 1/16W
R482	24366331	CF, 330 ohm	R624	24872101	Chip, 100 ohm, 1/16W
R483	24366102	CF, 1k ohm	R625	24872101	Chip, 100 ohm, 1/16W
R484	24366474	CF, 470k ohm	R626	24872101	Chip, 100 ohm, 1/16W
R485	24366103	CF, 10k ohm	R627	24872101	Chip, 100 ohm, 1/16W
R486	24366103	CF, 10k ohm	R633	24872101	Chip, 100 ohm, 1/16W
△R487	24000529	MF, 6800 ohm, 1/4W	R634	24872101	Chip, 100 ohm, 1/16W
△R488	24000360	MF, 1200ohm, 1/4W	R635	24872101	Chip, 100 ohm, 1/16W
R489	24366222	CF, 2200 ohm	R636	24872101	Chip, 100 ohm, 1/16W
R490	24327223	MF, 22k ohm, ±1%, 1/4W	R637	24872101	Chip, 100 ohm, 1/16W
R491	24366823	CF, 82k ohm	R638	24872101	Chip, 100 ohm, 1/16W
R492	24366392	CF, 3900 ohm	R639	24872101	Chip, 100 ohm, 1/16W
R493	24366224	CF, 220k ohm	R640	24872101	Chip, 100 ohm, 1/16W
△R494	24000639	MF, 22k ohm, 1/4W	R641	24872101	Chip, 100 ohm, 1/16W
R495	24366103	CF, 10k ohm	R642	24872101	Chip, 100 ohm, 1/16W
R496	24366223	CF, 22k ohm	R643	24872101	Chip, 100 ohm, 1/16W
R497	24366333	CF, 33k ohm	R661	24872101	Chip, 100 ohm, 1/16W
R498	24872103	Chip, 10k ohm, 1/16W	R662	24872332	Chip, 3300 ohm, 1/16W
R499	24366393	CF, 39k ohm	R663	24872472	Chip, 4700 ohm, 1/16W
R501	24011303	Chip, 30k ohm, 1/20W	R665	24872223	Chip, 22k ohm, 1/16W

Location No.	Part No.	Description	Location No.	Part No.	Description
R666	24872473	Chip, 47k ohm, 1/16W	R782	24366563	CF, 56k ohm
R667	24872223	Chip, 22k ohm, 1/16W	R783	24552221	OMF, 220 ohm, 1/2W
R668	24872473	Chip, 47k ohm, 1/16W	R784	24552100	OMF, 10 ohm, 1/2W
R669	24872222	Chip, 2200 ohm, 1/16W	R785	24366470	CF, 47 ohm
R671	24872101	Chip, 100 ohm, 1/16W	R786	24366751	CF, 750 ohm
R672	24872332	Chip, 3300 ohm, 1/16W	R787	24366122	CF, 1200 ohm
R673	24872472	Chip, 4700 ohm, 1/16W	R788	24366683	CF, 68k ohm
R674	24872103	Chip, 10k ohm, 1/16W	R789	24366683	CF, 68k ohm
R675	24872473	Chip, 47k ohm, 1/16W	R790	24366751	CF, 750 ohm
R682	24872473	Chip, 47k ohm, 1/16W	R791	24366122	CF, 1200 ohm
R683	24872223	Chip, 22k ohm, 1/16W	R792	24366102	CF, 1k ohm
R684	24872223	Chip, 22k ohm, 1/16W	R793	24321399	MF, 3.9 ohm, 1/2W
R687	24872103	Chip, 10k ohm, 1/16W	R794	24553270	OMF, 27 ohm, 1W
R689	24872222	Chip, 2200 ohm, 1/16W	R795	24322399	MF, 3.9 ohm, 1W
R690	24872103	Chip, 10k ohm, 1/16W	R796	24554221	OMF, 220 ohm, 2W
R702	24552221	OMF, 220 ohm, 1/2W	R797	24366470	CF, 47 ohm
R709	24366563	CF, 56k ohm	R798	24552331	OMF, 330 ohm, 1/2W
R713	24366273	CF, 27k ohm	R799	24553270	OMF, 27 ohm, 1W
R715	24366333	CF, 33k ohm	R810	24045006	Cement, 4.7 ohm, 7W
R716	24366223	CF, 22k ohm	R811	24007061	Cement, 1.8 ohm, ±10%, 2W
R717	24366333	CF, 33k ohm	R812	24382820	OMF, 82 ohm, 1W
R718	24366101	CF, 100 ohm	R818	24366683	CF, 68k ohm
R719	24366100	CF, 10 ohm	R825	24545109	FR, 1 ohm, 1/4W
R720	24552331	OMF, 330 ohm, 1/2W	R827	24366104	CF, 100k ohm
R722	24552471	OMF, 470 ohm, 1/2W	R843	24366473	CF, 47k ohm
R723	24366101	CF, 100 ohm	R854	24382121	OMF, 120 ohm, 1W
R724	24366221	CF, 220 ohm	R856	24366152	CF, 1500 ohm
R725	24366182	CF, 1800 ohm	R857	24552682	OMF, 6800 ohm, 1/2W
R730	24552100	OMF, 10 ohm, 1/2W	R858	24366102	CF, 1k ohm
R731	24552331	OMF, 330 ohm, 1/2W	R859	24553333	OMF, 33k ohm, 1W
R732	24366470	CF, 47 ohm	R860	24554223	OMF, 22k ohm, 2W
R733	24366683	CF, 68k ohm	R861	24554273	OMF, 27k ohm, 2W
R734	24366470	CF, 47 ohm	R862	24310689	MF, 6.8 ohm, 1/2W
R735	24366683	CF, 68k ohm	R863	24366101	CF, 100 ohm
R736	24553270	OMF, 27 ohm, 1W	R864	24552102	OMF, 1k ohm, 1/2W
R737	24366751	CF, 750 ohm	R865	24552390	OMF, 39 ohm, 1/2W
R738	24366102	CF, 1k ohm	R866	24366393	CF, 39k ohm
R739	24366751	CF, 750 ohm	R867	24366102	CF, 1k ohm
R740	24553270	OMF, 27 ohm, 1W	R868	24552470	OMF, 47 ohm, 1/2W
R741	24322399	MF, 3.9 ohm, 1W	R869	24366100	CF, 10 ohm
R742	24321399	MF, 3.9 ohm, 1/2W	R870	24381121	OMF, 120 ohm, 1/2W
R743	24554221	OMF, 220 ohm, 2W	R871	24382680	OMF, 68 ohm, 1W
R744	24366122	CF, 1200 ohm	R873	24366109	CF, 1 ohm
R745	24366122	CF, 1200 ohm	R892	24366102	CF, 1k ohm
R761	24366273	CF, 27k ohm	R898	24002000	CC, 3.9M ohm, ±10%, 1/2W
R762	24366563	CF, 56k ohm	R900	24000945	FR, 1.8 ohm, 2W
R763	24552331	OMF, 330 ohm, 1/2W	R901	24366101	CF, 100 ohm
R764	24366470	CF, 47 ohm	R902	24366331	CF, 330 ohm
R765	24552100	OMF, 10 ohm, 1/2W	R903	24942102	CC, 1k ohm, 1/2W
R766	24366470	CF, 47 ohm	R904	24366222	CF, 2200 ohm
R767	24552221	OMF, 220 ohm, 1/2W	R905	24366330	CF, 33 ohm
R768	24366751	CF, 750 ohm	R906	24366331	CF, 330 ohm
R769	24366122	CF, 1200 ohm	R908	24366470	CF, 47 ohm
R770	24553270	OMF, 27 ohm, 1W	R909	24366390	CF, 39 ohm
R771	24322399	MF, 3.9 ohm, 1W	R910	24322228	MF, 0.22 ohm, 1W
R772	24366683	CF, 68k ohm	R911	24366101	CF, 100 ohm
R773	24366683	CF, 68k ohm	R913	24942102	CC, 1k ohm, 1/2W
R774	24366751	CF, 750 ohm	R914	24366222	CF, 2200 ohm
R775	24366122	CF, 1200 ohm	R915	24366270	CF, 27 ohm
R776	24553270	OMF, 27 ohm, 1W	R916	24366331	CF, 330 ohm
R777	24321399	MF, 3.9 ohm, 1/2W	R917	24366331	CF, 330 ohm
R778	24366102	CF, 1k ohm	R918	24366330	CF, 33 ohm
R779	24554221	OMF, 220 ohm, 2W	R919	24366330	CF, 33 ohm
R781	24366273	CF, 27k ohm	R920	24366153	CF, 15k ohm

Location No.	Part No.	Description	Location No.	Part No.	Description
R921	24366101	CF, 100 ohm	R4014	24366222	CF, 2200 ohm
R922	24366331	CF, 330 ohm	R4015	24000633	MF, 10k ohm, 1/4W
R923	24942102	CC, 1k ohm, 1/2W	R4016	24366105	CF, 1M ohm
R924	24366222	CF, 2200 ohm	R4017	24000631	MF, 8200 ohm, 1/4W
R925	24366390	CF, 39 ohm	R4020	24000370	MF, 3300 ohm, 1/4W
R926	24366331	CF, 330 ohm	R4021	24000637	MF, 15k ohm, 1/4W
R927	24366100	CF, 10 ohm	R4022	24000368	MF, 2700 ohm, 1/4W
R928	24366470	CF, 47 ohm	R4023	24366472	CF, 4700 ohm
R929	24366390	CF, 39 ohm	R4025	24000366	MF, 2200 ohm, 1/4W
R930	24366153	CF, 15k ohm	R4026	24383470	OMF, 47 ohm, 2W
R931	24383153	OMF, 15k ohm, 2W	R4030	24366102	CF, 1k ohm
R932	24383153	OMF, 15k ohm, 2W	R4031	24366562	CF, 5600 ohm
R935	24366150	CF, 15 ohm	R4032	24000639	MF, 22k ohm, 1/4W
R936	24383153	OMF, 15k ohm, 2W	R4033	24019090	MF, 300k ohm, 1/4W
R937	24383153	OMF, 15k ohm, 2W	R4034	24366222	CF, 2200 ohm
R938	24366150	CF, 15 ohm	R4035	24366103	CF, 10k ohm
R941	24554153	OMF, 15k ohm, 2W	R4036	24366102	CF, 1k ohm
R942	24554153	OMF, 15k ohm, 2W	R4037	24366182	CF, 1800 ohm
R943	24554153	OMF, 15k ohm, 2W	R4044	24000639	MF, 22k ohm, 1/4W
R944	24383153	OMF, 15k ohm, 2W	R4051	24000372	MF, 3900 ohm, 1/4W
R945	24366150	CF, 15 ohm	R4052	24000147	MF, 470 ohm, 1/4W
R948	24366562	CF, 5600 ohm	R4053	24366472	CF, 4700 ohm
R949	24366153	CF, 15k ohm	R4054	24366472	CF, 4700 ohm
R951	24554153	OMF, 15k ohm, 2W	R4055	24066864	VR, 5k ohm, 0.3W
R952	24554153	OMF, 15k ohm, 2W	R4056	24000372	MF, 3900 ohm, 1/4W
R953	24554153	OMF, 15k ohm, 2W	R4057	24366222	CF, 2200 ohm
R954	24383153	OMF, 15k ohm, 2W	R4061	24000529	MF, 6800 ohm, 1/4W
R956	24366101	CF, 100 ohm	R4062	24000633	MF, 10k ohm, 1/4W
R959	24366150	CF, 15 ohm	R4402	24011105	Chip, 1M ohm, 1/20W
R961	24366122	CF, 1200 ohm	R4406	24872622	Chip, 6200 ohm, 1/16W
R962	24366681	CF, 680 ohm	R4407	24872361	Chip, 360 ohm, 1/16W
R963	24366222	CF, 2200 ohm	R4416	24872471	Chip, 470 ohm, 1/16W
R964	24366272	CF, 2700 ohm	R4417	24872471	Chip, 470 ohm, 1/16W
R965	24366471	CF, 470 ohm	R4420	24872103	Chip, 10k ohm, 1/16W
R966	24366331	CF, 330 ohm	R4422	24872222	Chip, 2200 ohm, 1/16W
R967	24366681	CF, 680 ohm	R4423	24872472	Chip, 4700 ohm, 1/16W
R968	24366470	CF, 47 ohm	R4424	24872103	Chip, 10k ohm, 1/16W
R969	24366683	CF, 68k ohm	R4501	24872101	Chip, 100 ohm, 1/16W
R970	24366393	CF, 39k ohm	R4503	24872102	Chip, 1k ohm, 1/16W
R971	24367821	CF, 820 ohm, ±2%	R4504	24872102	Chip, 1k ohm, 1/16W
R972	24367471	CF, 470 ohm, ±2%	R4505	24872223	Chip, 22k ohm, 1/16W
R973	24367681	CF, 680 ohm, ±2%	R4506	24872103	Chip, 10k ohm, 1/16W
R974	24367681	CF, 680 ohm, ±2%	R4507	24872103	Chip, 10k ohm, 1/16W
R975	24366561	CF, 560 ohm	R4508	24872102	Chip, 1k ohm, 1/16W
R976	24367472	CF, 4700 ohm, ±2%	R4509	24872561	Chip, 560 ohm, 1/16W
R977	24367512	CF, 5100 ohm, ±2%	R4510	24872152	Chip, 1500 ohm, 1/16W
R978	24367391	CF, 390 ohm, ±2%	R4511	24872102	Chip, 1k ohm, 1/16W
R979	24366272	CF, 2700 ohm	R4512	24872103	Chip, 10k ohm, 1/16W
R983	24366681	CF, 680 ohm	R4513	24872222	Chip, 2200 ohm, 1/16W
R984	24366821	CF, 820 ohm	R4514	24872361	Chip, 360 ohm, 1/16W
R985	24366821	CF, 820 ohm	R4515	24872622	Chip, 6200 ohm, 1/16W
R986	24366821	CF, 820 ohm	R4516	24872102	Chip, 1k ohm, 1/16W
R987	24366470	CF, 47 ohm	R4521	24872102	Chip, 1k ohm, 1/16W
R991	24366822	CF, 8200 ohm	R4522	24872102	Chip, 1k ohm, 1/16W
R992	24366153	CF, 15k ohm	R4523	24872102	Chip, 1k ohm, 1/16W
R4005	24366102	CF, 1k ohm	R4524	24872103	Chip, 10k ohm, 1/16W
R4006	24366103	CF, 10k ohm	R4525	24872103	Chip, 10k ohm, 1/16W
R4007	24366102	CF, 1k ohm	R4526	24872103	Chip, 10k ohm, 1/16W
R4008	24366101	CF, 100 ohm	R4527	24872102	Chip, 1k ohm, 1/16W
R4009	24366105	CF, 1M ohm	R4528	24872102	Chip, 1k ohm, 1/16W
R4010	24366102	CF, 1k ohm	R7701	24872104	Chip, 100k ohm, 1/16W
R4011	24366103	CF, 10k ohm	R7705	24872154	Chip, 150k ohm, 1/16W
R4012	24366472	CF, 4700 ohm	R7707	24872472	Chip, 4700 ohm, 1/16W
R4013	24366103	CF, 10k ohm	R7708	24872472	Chip, 4700 ohm, 1/16W

Location No.	Part No.	Description	Location No.	Part No.	Description
R7710	24384680	OMF, 68 ohm, 3W	R7885	24872103	Chip, 10k ohm, 1/16W
R7711	24323129	MF, 1.2 ohm, 2W	R7886	24872224	Chip, 220k ohm, 1/16W
R7712	24872472	Chip, 4700 ohm, 1/16W	R7887	24872562	Chip, 5600 ohm, 1/16W
R7713	24872472	Chip, 4700 ohm, 1/16W	R7890	24872471	Chip, 470 ohm, 1/16W
R7715	24384680	OMF, 68 ohm, 3W	R7891	24872471	Chip, 470 ohm, 1/16W
R7716	24323129	MF, 1.2 ohm, 2W	R9501	24366470	CF, 47 ohm
R7717	24872472	Chip, 4700 ohm, 1/16W	R9502	24366470	CF, 47 ohm
R7718	24872472	Chip, 4700 ohm, 1/16W	R9503	24366681	CF, 680 ohm
R7720	24384680	OMF, 68 ohm, 3W	R9504	24366683	CF, 68k ohm
R7721	24323129	MF, 1.2 ohm, 2W	R9505	24366393	CF, 39k ohm
R7722	24872473	Chip, 47k ohm, 1/16W	R9506	24366681	CF, 680 ohm
R7723	24872472	Chip, 4700 ohm, 1/16W	R9601	24366121	CF, 120 ohm
R7725	24384680	OMF, 68 ohm, 3W	R9602	24366622	CF, 6200 ohm
R7726	24323129	MF, 1.2 ohm, 2W	R9603	24366392	CF, 3900 ohm
R7727	24872472	Chip, 4700 ohm, 1/16W	R9604	24366272	CF, 2700 ohm
R7728	24872472	Chip, 4700 ohm, 1/16W	R9605	24366682	CF, 6800 ohm
R7730	24384680	OMF, 68 ohm, 3W	R9606	24366202	CF, 2k ohm
R7731	24323129	MF, 1.2 ohm, 2W	R9607	24366470	CF, 47 ohm
R7732	24872473	Chip, 47k ohm, 1/16W	R9608	24366681	CF, 680 ohm
R7733	24872472	Chip, 4700 ohm, 1/16W	R9609	24366683	CF, 68k ohm
R7735	24384680	OMF, 68 ohm, 3W	R9610	24366393	CF, 39k ohm
R7736	24323129	MF, 1.2 ohm, 2W	R9611	24366681	CF, 680 ohm
R7741	24872471	Chip, 470 ohm, 1/16W	R9612	24366470	CF, 47 ohm
R7742	24872222	Chip, 2200 ohm, 1/16W	R9613	24366270	CF, 27 ohm
R7743	24872223	Chip, 22k ohm, 1/16W	R9614	24366300	CF, 30 ohm
R7744	24872102	Chip, 1k ohm, 1/16W	R9701	24366103	CF, 10k ohm
R7745	24872222	Chip, 2200 ohm, 1/16W	R9702	24366103	CF, 10k ohm
R7746	24872223	Chip, 22k ohm, 1/16W	R9703	24366103	CF, 10k ohm
R7747	24872222	Chip, 2200 ohm, 1/16W	R9705	24366822	CF, 8200 ohm
R7749	24872331	Chip, 330 ohm, 1/16W	R9706	24366682	CF, 6800 ohm
R7750	24323228	MF, 0.22 ohm, 2W	R9707	24366391	CF, 390 ohm
R7751	24872471	Chip, 470 ohm, 1/16W	R9708	24366152	CF, 1500 ohm
R7757	24872223	Chip, 22k ohm, 1/16W	R9709	24366271	CF, 270 ohm
R7758	24872222	Chip, 2200 ohm, 1/16W	R9710	24366272	CF, 2700 ohm
R7760	24872103	Chip, 10k ohm, 1/16W	R9711	24366472	CF, 4700 ohm
R7761	24872333	Chip, 33k ohm, 1/16W	R9712	24366272	CF, 2700 ohm
R7762	24872103	Chip, 10k ohm, 1/16W	R9713	24366102	CF, 1k ohm
R7763	24872471	Chip, 470 ohm, 1/16W	R9714	24366102	CF, 1k ohm
R7764	24872331	Chip, 330 ohm, 1/16W	R9715	24366102	CF, 1k ohm
R7765	24323338	MF, 0.33 ohm, 2W	RA01	24872102	Chip, 1k ohm, 1/16W
R7766	24872223	Chip, 22k ohm, 1/16W	RA02	24872101	Chip, 100 ohm, 1/16W
R7767	24872153	Chip, 15k ohm, 1/16W	RA03	24872101	Chip, 100 ohm, 1/16W
R7775	24872273	Chip, 27k ohm, 1/16W	RA04	24872102	Chip, 1k ohm, 1/16W
R7776	24872472	Chip, 4700 ohm, 1/16W	RA05	24872102	Chip, 1k ohm, 1/16W
R7777	24872273	Chip, 27k ohm, 1/16W	RA06	24872102	Chip, 1k ohm, 1/16W
R7778	24872472	Chip, 4700 ohm, 1/16W	RA07	24872102	Chip, 1k ohm, 1/16W
R7779	24872102	Chip, 1k ohm, 1/16W	RA08	24872102	Chip, 1k ohm, 1/16W
R7780	24872102	Chip, 1k ohm, 1/16W	RA09	24872102	Chip, 1k ohm, 1/16W
R7781	24872333	Chip, 33k ohm, 1/16W	RA10	24872102	Chip, 1k ohm, 1/16W
R7793	24872153	Chip, 15k ohm, 1/16W	RA11	24872102	Chip, 1k ohm, 1/16W
R7797	24872472	Chip, 4700 ohm, 1/16W	RA12	24872102	Chip, 1k ohm, 1/16W
R7798	24872103	Chip, 10k ohm, 1/16W	RA13	24872102	Chip, 1k ohm, 1/16W
R7799	24872222	Chip, 2200 ohm, 1/16W	RA14	24872103	Chip, 10k ohm, 1/16W
R7864	24872221	Chip, 220 ohm, 1/16W	RA15	24872102	Chip, 1k ohm, 1/16W
R7865	24872332	Chip, 3300 ohm, 1/16W	RA16	24872102	Chip, 1k ohm, 1/16W
R7866	24872332	Chip, 3300 ohm, 1/16W	RA17	24872102	Chip, 1k ohm, 1/16W
R7867	24872332	Chip, 3300 ohm, 1/16W	RA18	24872103	Chip, 10k ohm, 1/16W
R7872	24872474	Chip, 470k ohm, 1/16W	RA19	24872102	Chip, 1k ohm, 1/16W
R7873	24872332	Chip, 3300 ohm, 1/16W	RA26	24872101	Chip, 100 ohm, 1/16W
R7880	24872221	Chip, 220 ohm, 1/16W	RA27	24872101	Chip, 100 ohm, 1/16W
R7881	24872472	Chip, 4700 ohm, 1/16W	RA29	24872102	Chip, 1k ohm, 1/16W
R7882	24872103	Chip, 10k ohm, 1/16W	RA30	24872102	Chip, 1k ohm, 1/16W
R7883	24872103	Chip, 10k ohm, 1/16W	RA31	24872102	Chip, 1k ohm, 1/16W
R7884	24872103	Chip, 10k ohm, 1/16W	RA32	24872102	Chip, 1k ohm, 1/16W

Location No.	Part No.	Description	Location No.	Part No.	Description
RA33	24872102	Chip, 1k ohm, 1/16W	RB94	24872222	Chip, 2200 ohm, 1/16W
RA34	24872102	Chip, 1k ohm, 1/16W	RB95	24872222	Chip, 2200 ohm, 1/16W
RA35	24872102	Chip, 1k ohm, 1/16W	RB96	24872273	Chip, 27k ohm, 1/16W
RA36	24872471	Chip, 470 ohm, 1/16W	RB97	24872273	Chip, 27k ohm, 1/16W
RA39	24872102	Chip, 1k ohm, 1/16W	RB98	24872102	Chip, 1k ohm, 1/16W
RA46	24872332	Chip, 3300 ohm, 1/16W	RD02	24366101	CF, 100 ohm
RA47	24872332	Chip, 3300 ohm, 1/16W	RD03	24366101	CF, 100 ohm
RA48	24872101	Chip, 100 ohm, 1/16W	RD05	24366432	CF, 4300 ohm
RA49	24872332	Chip, 3300 ohm, 1/16W	RD06	24366102	CF, 1k ohm
RA50	24872682	Chip, 6800 ohm, 1/16W	RD07	24366114	CF, 110k ohm
RA51	24872151	Chip, 150 ohm, 1/16W	RD08	24366132	CF, 1300 ohm
RA52	24872103	Chip, 10k ohm, 1/16W	RD09	24366473	CF, 47k ohm
RA54	24872332	Chip, 3300 ohm, 1/16W	RD10	24366513	CF, 51k ohm
RA56	24872102	Chip, 1k ohm, 1/16W	RD11	24366392	CF, 3900 ohm
RA59	24872101	Chip, 100 ohm, 1/16W	RD12	24366101	CF, 100 ohm
RA60	24872101	Chip, 100 ohm, 1/16W	RD14	24366101	CF, 100 ohm
RA61	24872103	Chip, 10k ohm, 1/16W	RD19	24366101	CF, 100 ohm
RA71	24872102	Chip, 1k ohm, 1/16W	RD20	24366101	CF, 100 ohm
RA72	24872332	Chip, 3300 ohm, 1/16W	RD21	24366122	CF, 1200 ohm
RA73	24872332	Chip, 3300 ohm, 1/16W	RD22	24366821	CF, 820 ohm
RA74	24872153	Chip, 15k ohm, 1/16W	RD23	24366152	CF, 1500 ohm
RA75	24872153	Chip, 15k ohm, 1/16W	RD24	24366681	CF, 680 ohm
RA76	24872103	Chip, 10k ohm, 1/16W	RH002	24872473	Chip, 47k ohm, 1/16W
RA77	24872103	Chip, 10k ohm, 1/16W	RH003	24872473	Chip, 47k ohm, 1/16W
RA78	24872333	Chip, 33k ohm, 1/16W	RH004	24872221	Chip, 220 ohm, 1/16W
RA79	24872333	Chip, 33k ohm, 1/16W	RH005	24872221	Chip, 220 ohm, 1/16W
RA80	24872101	Chip, 100 ohm, 1/16W	RH006	24872221	Chip, 220 ohm, 1/16W
RA81	24366683	CF, 68k ohm	RH007	24872221	Chip, 220 ohm, 1/16W
RA82	24366223	CF, 22k ohm	RH008	24872221	Chip, 220 ohm, 1/16W
RA83	24366103	CF, 10k ohm	RH009	24872103	Chip, 10k ohm, 1/16W
RA86	24366822	CF, 8200 ohm	RH041	24872101	Chip, 100 ohm, 1/16W
RA87	24366153	CF, 15k ohm	RH042	24872101	Chip, 100 ohm, 1/16W
RA88	24366273	CF, 27k ohm	RH043	24872101	Chip, 100 ohm, 1/16W
RA99	24366102	CF, 1k ohm	RH044	24872101	Chip, 100 ohm, 1/16W
RB01	24872101	Chip, 100 ohm, 1/16W	RH045	24872101	Chip, 100 ohm, 1/16W
RB02	24872101	Chip, 100 ohm, 1/16W	RH046	24872101	Chip, 100 ohm, 1/16W
RB03	24872101	Chip, 100 ohm, 1/16W	RH047	24872101	Chip, 100 ohm, 1/16W
RB09	24872103	Chip, 10k ohm, 1/16W	RH048	24872101	Chip, 100 ohm, 1/16W
RB10	24872101	Chip, 100 ohm, 1/16W	RH051	24872222	Chip, 2200 ohm, 1/16W
RB11	24366271	CF, 270 ohm	RH061	24872561	Chip, 560 ohm, 1/16W
RB11	24872101	Chip, 100 ohm, 1/16W	RH062	24872102	Chip, 1k ohm, 1/16W
RB12	24872101	Chip, 100 ohm, 1/16W	RH063	24872103	Chip, 10k ohm, 1/16W
RB13	24872103	Chip, 10k ohm, 1/16W	RH064	24872103	Chip, 10k ohm, 1/16W
RB14	24366103	CF, 10k ohm	RH170	24872122	Chip, 1200 ohm, 1/16W
RB14	24872153	Chip, 15k ohm, 1/16W	RH171	24872122	Chip, 1200 ohm, 1/16W
RB15	24366471	CF, 470 ohm	RH172	24872122	Chip, 1200 ohm, 1/16W
RB15	24872153	Chip, 15k ohm, 1/16W	RH173	24872122	Chip, 1200 ohm, 1/16W
RB16	24872332	Chip, 3300 ohm, 1/16W	RH174	24872122	Chip, 1200 ohm, 1/16W
RB17	24872332	Chip, 3300 ohm, 1/16W	RH175	24872122	Chip, 1200 ohm, 1/16W
RB19	24366470	CF, 47 ohm	RH176	24872122	Chip, 1200 ohm, 1/16W
RB33	24872102	Chip, 1k ohm, 1/16W	RH177	24872122	Chip, 1200 ohm, 1/16W
RB37	24872101	Chip, 100 ohm, 1/16W	RH178	24872122	Chip, 1200 ohm, 1/16W
RB38	24872101	Chip, 100 ohm, 1/16W	RH179	24872122	Chip, 1200 ohm, 1/16W
RB41	24366151	CF, 150 ohm	RH180	24872122	Chip, 1200 ohm, 1/16W
RB41	24366273	CF, 27k ohm	RH181	24872122	Chip, 1200 ohm, 1/16W
RB42	24366153	CF, 15k ohm	RH182	24872122	Chip, 1200 ohm, 1/16W
RB43	24872473	Chip, 47k ohm, 1/16W	RH183	24872122	Chip, 1200 ohm, 1/16W
RB61	24872222	Chip, 2200 ohm, 1/16W	RH184	24872122	Chip, 1200 ohm, 1/16W
RB62	24872103	Chip, 10k ohm, 1/16W	RH185	24872122	Chip, 1200 ohm, 1/16W
RB65	24872392	Chip, 3900 ohm, 1/16W	RH186	24872122	Chip, 1200 ohm, 1/16W
RB90	24872392	Chip, 3900 ohm, 1/16W	RH187	24872122	Chip, 1200 ohm, 1/16W
RB91	24872473	Chip, 47k ohm, 1/16W	RH188	24872122	Chip, 1200 ohm, 1/16W
RB92	24872273	Chip, 27k ohm, 1/16W	RH189	24872122	Chip, 1200 ohm, 1/16W
RB93	24872273	Chip, 27k ohm, 1/16W	RH190	24872122	Chip, 1200 ohm, 1/16W

Location No.	Part No.	Description	Location No.	Part No.	Description
RH191	24872122	Chip, 1200 ohm, 1/16W	RS40	24366101	CF, 100 ohm
RH192	24872122	Chip, 1200 ohm, 1/16W	RS42	24366101	CF, 100 ohm
RH193	24872122	Chip, 1200 ohm, 1/16W	RS48	24366101	CF, 100 ohm
RH194	24872122	Chip, 1200 ohm, 1/16W	RS49	24366103	CF, 10k ohm
RH195	24872122	Chip, 1200 ohm, 1/16W	RS51	24366103	CF, 10k ohm
RH196	24872122	Chip, 1200 ohm, 1/16W	RS52	24366103	CF, 10k ohm
RH197	24872122	Chip, 1200 ohm, 1/16W	RS53	24366103	CF, 10k ohm
RH198	24872122	Chip, 1200 ohm, 1/16W	RS54	24366103	CF, 10k ohm
RH199	24872122	Chip, 1200 ohm, 1/16W	RV01	24366472	CF, 4700 ohm
RH201	24872472	Chip, 4700 ohm, 1/16W	RV03	24366101	CF, 100 ohm
RH202	24872472	Chip, 4700 ohm, 1/16W	RV04	24366101	CF, 100 ohm
RH205	24872472	Chip, 4700 ohm, 1/16W	RV11	24366100	CF, 10 ohm
RH206	24872472	Chip, 4700 ohm, 1/16W	RV12	24366100	CF, 10 ohm
RH207	24872331	Chip, 330 ohm, 1/16W	RV13	24366100	CF, 10 ohm
RH208	24872221	Chip, 220 ohm, 1/16W	RV15	24366222	CF, 2200 ohm
RH209	24872102	Chip, 1k ohm, 1/16W	RV16	24366750	CF, 75 ohm
RH210	24872102	Chip, 1k ohm, 1/16W	RV17	24366750	CF, 75 ohm
RH211	24872473	Chip, 47k ohm, 1/16W	RV18	24366750	CF, 75 ohm
RH212	24872473	Chip, 47k ohm, 1/16W	RV19	24366332	CF, 3300 ohm
RH213	24872103	Chip, 10k ohm, 1/16W	RV24	24366750	CF, 75 ohm
RR08	24872102	Chip, 1k ohm, 1/16W	RV25	24366750	CF, 75 ohm
RR09	24872102	Chip, 1k ohm, 1/16W	RV26	24366750	CF, 75 ohm
RR10	24872102	Chip, 1k ohm, 1/16W	RV28	24366472	CF, 4700 ohm
RR11	24872101	Chip, 100 ohm, 1/16W	RV29	24366472	CF, 4700 ohm
RR12	24872101	Chip, 100 ohm, 1/16W	RV31	24366332	CF, 3300 ohm
RR13	24872101	Chip, 100 ohm, 1/16W	RV31	24872101	Chip, 100 ohm, 1/16W
RR14	24872103	Chip, 10k ohm, 1/16W	RV32	24366750	CF, 75 ohm
RR15	24872151	Chip, 150 ohm, 1/16W	RV32	24872101	Chip, 100 ohm, 1/16W
RR16	24872151	Chip, 150 ohm, 1/16W	RV63	24366102	CF, 1k ohm
RR17	24872151	Chip, 150 ohm, 1/16W	RV64	24366750	CF, 75 ohm
RR18	24872102	Chip, 1k ohm, 1/16W	RV65	24366750	CF, 75 ohm
RR31	24872101	Chip, 100 ohm, 1/16W	RV67	24366750	CF, 75 ohm
RR52	24872102	Chip, 1k ohm, 1/16W	RV74	24366750	CF, 75 ohm
RR53	24872471	Chip, 470 ohm, 1/16W	RV81	24366472	CF, 4700 ohm
RR54	24872102	Chip, 1k ohm, 1/16W	RV83	24366332	CF, 3300 ohm
RR55	24872471	Chip, 470 ohm, 1/16W	RV84	24366750	CF, 75 ohm
RR56	24872102	Chip, 1k ohm, 1/16W	RV85	24552181	OMF, 180 ohm, 1/2W
RR57	24872471	Chip, 470 ohm, 1/16W	RV89	24366680	CF, 68 ohm
RR61	24872222	Chip, 2200 ohm, 1/16W	RV93	24366101	CF, 100 ohm
RR62	24872222	Chip, 2200 ohm, 1/16W	RV97	24366221	CF, 220 ohm
RR63	24872222	Chip, 2200 ohm, 1/16W	RV117	24366750	CF, 75 ohm
RS02	24366472	CF, 4700 ohm	RV118	24366750	CF, 75 ohm
RS04	24366102	CF, 1k ohm	RV119	24366750	CF, 75 ohm
RS06	24366102	CF, 1k ohm	RV124	24366392	CF, 3900 ohm
RS07	24366103	CF, 10k ohm	RV125	24366123	CF, 12k ohm
RS08	24366103	CF, 10k ohm	RV126	24366274	CF, 270k ohm
RS09	24366102	CF, 1k ohm	RV127	24366331	CF, 330 ohm
RS10	24366102	CF, 1k ohm	RV128	24366472	CF, 4700 ohm
RS12	24366103	CF, 10k ohm	RV140	24366103	CF, 10k ohm
RS21	24366104	CF, 100k ohm	RV141	24366302	CF, 3k ohm
RS22	24366104	CF, 100k ohm	RV142	24366103	CF, 10k ohm
RS25	24366223	CF, 22k ohm	RV143	24366103	CF, 10k ohm
RS26	24366223	CF, 22k ohm	RV169	24872102	Chip, 1k ohm, 1/16W
RS27	24366471	CF, 470 ohm	RV178	24872152	Chip, 1500 ohm, 1/16W
RS28	24366471	CF, 470 ohm	RV179	24872472	Chip, 4700 ohm, 1/16W
RS29	24366104	CF, 100k ohm	RV180	24872472	Chip, 4700 ohm, 1/16W
RS30	24366104	CF, 100k ohm	RV181	24872101	Chip, 100 ohm, 1/16W
RS31	24366103	CF, 10k ohm	RV182	24872101	Chip, 100 ohm, 1/16W
RS32	24366104	CF, 100k ohm	RV183	24872101	Chip, 100 ohm, 1/16W
RS33	24366222	CF, 2200 ohm	RV184	24872182	Chip, 1800 ohm, 1/16W
RS34	24366222	CF, 2200 ohm	RV185	24872182	Chip, 1800 ohm, 1/16W
RS35	24366103	CF, 10k ohm	RV186	24872182	Chip, 1800 ohm, 1/16W
RS36	24366103	CF, 10k ohm	RV510	24011102	Chip, 1k ohm, 1/20W
RS37	24366101	CF, 100 ohm	RV511	24011472	Chip, 4700 ohm, 1/20W

Location No.	Part No.	Description	Location No.	Part No.	Description
RV520	24011472	Chip, 4700 ohm, 1/20W	RX163	24011123	Chip, 12k ohm, 1/20W
RV521	24011472	Chip, 4700 ohm, 1/20W	RX164	24011562	Chip, 5600 ohm, 1/20W
RV522	24011472	Chip, 4700 ohm, 1/20W	RX165	24872331	Chip, 330 ohm, 1/16W
RV523	24011101	Chip, 100 ohm, 1/20W	RX166	24011151	Chip, 150 ohm, 1/20W
RV525	24011101	Chip, 100 ohm, 1/20W	RX167	24011331	Chip, 330 ohm, 1/20W
RV527	24011101	Chip, 100 ohm, 1/20W	RX168	24011123	Chip, 12k ohm, 1/20W
RV529	24011472	Chip, 4700 ohm, 1/20W	RX169	24011562	Chip, 5600 ohm, 1/20W
RV530	24011472	Chip, 4700 ohm, 1/20W	RX170	24872431	Chip, 430 ohm, 1/16W
RV531	24011472	Chip, 4700 ohm, 1/20W	RX171	24011470	Chip, 47 ohm, 1/20W
RV532	24011101	Chip, 100 ohm, 1/20W	RX172	24871681	Chip, 680 ohm, 1/8W
RV533	24011101	Chip, 100 ohm, 1/20W	RX173	24011121	Chip, 120 ohm, 1/20W
RV534	24011101	Chip, 100 ohm, 1/20W	RX174	24011471	Chip, 470 ohm, 1/20W
RV544	24011103	Chip, 10k ohm, 1/20W	RX176	24872102	Chip, 1k ohm, 1/16W
RV545	24011103	Chip, 10k ohm, 1/20W	RX179	24011102	Chip, 1k ohm, 1/20W
RV546	24011103	Chip, 10k ohm, 1/20W	RX181	24011102	Chip, 1k ohm, 1/20W
RW10	24872102	Chip, 1k ohm, 1/16W	RX182	24011471	Chip, 470 ohm, 1/20W
RW30	24872102	Chip, 1k ohm, 1/16W	RX183	24872331	Chip, 330 ohm, 1/16W
RW40	24366182	CF, 1800 ohm	RX184	24011100	Chip, 10 ohm, 1/20W
RW45	24366103	CF, 10k ohm	RX191	24011102	Chip, 1k ohm, 1/20W
RX11	24872221	Chip, 220 ohm, 1/16W	RX192	24011100	Chip, 10 ohm, 1/20W
RX12	24872221	Chip, 220 ohm, 1/16W	RX193	24871331	Chip, 330 ohm, 1/8W
RX101	24011101	Chip, 100 ohm, 1/20W	RX195	24011100	Chip, 10 ohm, 1/20W
RX102	24011222	Chip, 2200 ohm, 1/20W	RX196	24011100	Chip, 10 ohm, 1/20W
RX103	24011123	Chip, 12k ohm, 1/20W	RX199	24011101	Chip, 100 ohm, 1/20W
RX104	24011562	Chip, 5600 ohm, 1/20W	RX201	24011101	Chip, 100 ohm, 1/20W
RX105	24872331	Chip, 330 ohm, 1/16W	RX202	24011221	Chip, 220 ohm, 1/20W
RX106	24011151	Chip, 150 ohm, 1/20W	RX203	24011102	Chip, 1k ohm, 1/20W
RX107	24011331	Chip, 330 ohm, 1/20W	RX204	24011101	Chip, 100 ohm, 1/20W
RX108	24011123	Chip, 12k ohm, 1/20W	RX205	24011102	Chip, 1k ohm, 1/20W
RX109	24011562	Chip, 5600 ohm, 1/20W	RX211	24871100	Chip, 10 ohm, 1/8W
RX110	24872431	Chip, 430 ohm, 1/16W	RX219	24011100	Chip, 10 ohm, 1/20W
RX111	24011470	Chip, 47 ohm, 1/20W	RX220	24011562	Chip, 5600 ohm, 1/20W
RX112	24871681	Chip, 680 ohm, 1/8W	RX221	24011272	Chip, 2700 ohm, 1/20W
RX113	24011121	Chip, 120 ohm, 1/20W	RX224	24011151	Chip, 150 ohm, 1/20W
RX114	24011471	Chip, 470 ohm, 1/20W	RX225	24011121	Chip, 120 ohm, 1/20W
RX115	24011272	Chip, 2700 ohm, 1/20W	RX227	24011100	Chip, 10 ohm, 1/20W
RX116	24872102	Chip, 1k ohm, 1/16W	RX228	24011100	Chip, 10 ohm, 1/20W
RX119	24011102	Chip, 1k ohm, 1/20W	RX229	24011100	Chip, 10 ohm, 1/20W
RX121	24871471	Chip, 470 ohm, 1/8W	RX241	24011152	Chip, 1500 ohm, 1/20W
RX122	24011471	Chip, 470 ohm, 1/20W	RX244	24011471	Chip, 470 ohm, 1/20W
RX123	24872471	Chip, 470 ohm, 1/16W	RX245	24011681	Chip, 680 ohm, 1/20W
RX124	24011100	Chip, 10 ohm, 1/20W	RX246	24011152	Chip, 1500 ohm, 1/20W
RX131	24011101	Chip, 100 ohm, 1/20W	RX247	24011100	Chip, 10 ohm, 1/20W
RX132	24011222	Chip, 2200 ohm, 1/20W	RX248	24011100	Chip, 10 ohm, 1/20W
RX133	24011123	Chip, 12k ohm, 1/20W	RX249	24011100	Chip, 10 ohm, 1/20W
RX134	24011562	Chip, 5600 ohm, 1/20W	RX301	24011103	Chip, 10k ohm, 1/20W
RX135	24872331	Chip, 330 ohm, 1/16W	RX302	24011103	Chip, 10k ohm, 1/20W
RX136	24011151	Chip, 150 ohm, 1/20W	RX303	24011103	Chip, 10k ohm, 1/20W
RX137	24011331	Chip, 330 ohm, 1/20W	RX304	24011103	Chip, 10k ohm, 1/20W
RX138	24011123	Chip, 12k ohm, 1/20W	RX306	24011100	Chip, 10 ohm, 1/20W
RX139	24011562	Chip, 5600 ohm, 1/20W	RX307	24011101	Chip, 100 ohm, 1/20W
RX140	24872431	Chip, 430 ohm, 1/16W	RX308	24011100	Chip, 10 ohm, 1/20W
RX141	24011470	Chip, 47 ohm, 1/20W	RX309	24011103	Chip, 10k ohm, 1/20W
RX142	24871681	Chip, 680 ohm, 1/8W	RX310	24011100	Chip, 10 ohm, 1/20W
RX143	24011121	Chip, 120 ohm, 1/20W	RX311	24011100	Chip, 10 ohm, 1/20W
RX144	24011471	Chip, 470 ohm, 1/20W	RX313	24011100	Chip, 10 ohm, 1/20W
RX146	24872102	Chip, 1k ohm, 1/16W	RX317	24011100	Chip, 10 ohm, 1/20W
RX149	24011102	Chip, 1k ohm, 1/20W	RX319	24011100	Chip, 10 ohm, 1/20W
RX151	24011102	Chip, 1k ohm, 1/20W	RX320	24011103	Chip, 10k ohm, 1/20W
RX152	24011471	Chip, 470 ohm, 1/20W	RX321	24011103	Chip, 10k ohm, 1/20W
RX153	24872331	Chip, 330 ohm, 1/16W	RX322	24011103	Chip, 10k ohm, 1/20W
RX154	24011100	Chip, 10 ohm, 1/20W	RX323	24011103	Chip, 10k ohm, 1/20W
RX161	24011101	Chip, 100 ohm, 1/20W	RX326	24011100	Chip, 10 ohm, 1/20W
RX162	24011222	Chip, 2200 ohm, 1/20W	RX328	24011103	Chip, 10k ohm, 1/20W

Location No.	Part No.	Description	Location No.	Part No.	Description
RX330	24011100	Chip, 10 ohm, 1/20W	RX543	24011471	Chip, 470 ohm, 1/20W
RX331	24011100	Chip, 10 ohm, 1/20W	RX544	24871681	Chip, 680 ohm, 1/8W
RX332	24011100	Chip, 10 ohm, 1/20W	RX545	24000445	Chip Jumper, 1680 Type
RX333	24011100	Chip, 10 ohm, 1/20W	RX601	24011100	Chip, 10 ohm, 1/20W
RX334	24011100	Chip, 10 ohm, 1/20W	RX811	24011471	Chip, 470 ohm, 1/20W
RX335	24011100	Chip, 10 ohm, 1/20W	RX812	24011471	Chip, 470 ohm, 1/20W
RX336	24011103	Chip, 10k ohm, 1/20W	RX821	24011151	Chip, 150 ohm, 1/20W
RX337	24011100	Chip, 10 ohm, 1/20W	RX822	24011151	Chip, 150 ohm, 1/20W
RX338	24011100	Chip, 10 ohm, 1/20W	RX823	24011151	Chip, 150 ohm, 1/20W
RX339	24011100	Chip, 10 ohm, 1/20W	RX824	24011101	Chip, 100 ohm, 1/20W
RX340	24019439	Chip, 47 ohm, 1/16W	RX825	24011101	Chip, 100 ohm, 1/20W
RX341	24019439	Chip, 47 ohm, 1/16W	RX826	24011681	Chip, 680 ohm, 1/20W
RX342	24019439	Chip, 47 ohm, 1/16W	RX827	24011101	Chip, 100 ohm, 1/20W
RX343	24019439	Chip, 47 ohm, 1/16W	RX829	24011102	Chip, 1k ohm, 1/20W
RX344	24011470	Chip, 47 ohm, 1/20W	RX831	24000445	Chip Jumper, 1680 Type
RX345	24019439	Chip, 47 ohm, 1/16W	RX832	24011100	Chip, 10 ohm, 1/20W
RX346	24019439	Chip, 47 ohm, 1/16W	RX833	24011100	Chip, 10 ohm, 1/20W
RX347	24019439	Chip, 47 ohm, 1/16W	RX844	24011101	Chip, 100 ohm, 1/20W
RX348	24019439	Chip, 47 ohm, 1/16W	RX845	24011101	Chip, 100 ohm, 1/20W
RX349	24019439	Chip, 47 ohm, 1/16W	RX890	24011682	Chip, 6800 ohm, 1/20W
RX350	24019439	Chip, 47 ohm, 1/16W	RX891	24011103	Chip, 10k ohm, 1/20W
RX351	24019439	Chip, 47 ohm, 1/16W	RX892	24011472	Chip, 4700 ohm, 1/20W
RX352	24019439	Chip, 47 ohm, 1/16W	RX893	24011682	Chip, 6800 ohm, 1/20W
RX357	24011511	Chip, 510 ohm, 1/20W	RX894	24011103	Chip, 10k ohm, 1/20W
RX358	24011470	Chip, 47 ohm, 1/20W	RX895	24011472	Chip, 4700 ohm, 1/20W
RX360	24011101	Chip, 100 ohm, 1/20W	RX896	24011101	Chip, 100 ohm, 1/20W
RX363	24011511	Chip, 510 ohm, 1/20W	RX897	24000445	Chip Jumper, 1680 Type
RX364	24011470	Chip, 47 ohm, 1/20W	RX899	24011101	Chip, 100 ohm, 1/20W
RX366	24011101	Chip, 100 ohm, 1/20W	RX924	24011223	Chip, 22k ohm, 1/20W
RX370	24011181	Chip, 180 ohm, 1/20W	RX934	24011223	Chip, 22k ohm, 1/20W
RX371	24011220	Chip, 22 ohm, 1/20W	RX942	24011103	Chip, 10k ohm, 1/20W
RX372	24011272	Chip, 2700 ohm, 1/20W	RX944	24011223	Chip, 22k ohm, 1/20W
RX373	24011272	Chip, 2700 ohm, 1/20W	RY01	24011102	Chip, 1k ohm, 1/20W
RX374	24011122	Chip, 1200 ohm, 1/20W	RY02	24011471	Chip, 470 ohm, 1/20W
RX375	24011181	Chip, 180 ohm, 1/20W	RY09	24011102	Chip, 1k ohm, 1/20W
RX376	24011220	Chip, 22 ohm, 1/20W	RY10	24011102	Chip, 1k ohm, 1/20W
RX377	24011272	Chip, 2700 ohm, 1/20W	RY20	24011101	Chip, 100 ohm, 1/20W
RX378	24011272	Chip, 2700 ohm, 1/20W	RY21	24011101	Chip, 100 ohm, 1/20W
RX379	24011122	Chip, 1200 ohm, 1/20W	RY22	24011153	Chip, 15k ohm, 1/20W
RX380	24011181	Chip, 180 ohm, 1/20W	RY23	24011332	Chip, 3300 ohm, 1/20W
RX381	24011220	Chip, 22 ohm, 1/20W	RY24	24011102	Chip, 1k ohm, 1/20W
RX382	24011272	Chip, 2700 ohm, 1/20W	RY25	24011102	Chip, 1k ohm, 1/20W
RX383	24011272	Chip, 2700 ohm, 1/20W	RY26	24011331	Chip, 330 ohm, 1/20W
RX384	24011122	Chip, 1200 ohm, 1/20W	RY27	24011330	Chip, 33 ohm, 1/20W
RX399	24011100	Chip, 10 ohm, 1/20W	RY28	24011153	Chip, 15k ohm, 1/20W
RX403	24011101	Chip, 100 ohm, 1/20W	RY31	24011101	Chip, 100 ohm, 1/20W
RX404	24871101	Chip, 100 ohm, 1/8W	RY32	24011330	Chip, 33 ohm, 1/20W
RX405	24011101	Chip, 100 ohm, 1/20W	RY33	24011330	Chip, 33 ohm, 1/20W
RX406	24871471	Chip, 470 ohm, 1/8W	RY68	24011152	Chip, 1500 ohm, 1/20W
RX520	24011100	Chip, 10 ohm, 1/20W	RY69	24011682	Chip, 6800 ohm, 1/20W
RX521	24011222	Chip, 2200 ohm, 1/20W	RY79	24011103	Chip, 10k ohm, 1/20W
RX522	24011121	Chip, 120 ohm, 1/20W	RY80	24366331	CF, 330 ohm
RX523	24011681	Chip, 680 ohm, 1/20W	RY81	24366101	CF, 100 ohm
RX524	24871681	Chip, 680 ohm, 1/8W	RY82	24366102	CF, 1k ohm
RX525	24000445	Chip Jumper, 1680 Type	RY87	24366100	CF, 10 ohm
RX530	24011100	Chip, 10 ohm, 1/20W	RY105	24011331	Chip, 330 ohm, 1/20W
RX531	24011222	Chip, 2200 ohm, 1/20W	RY106	24011101	Chip, 100 ohm, 1/20W
RX532	24011121	Chip, 120 ohm, 1/20W	RY109	24011331	Chip, 330 ohm, 1/20W
RX533	24011471	Chip, 470 ohm, 1/20W	RY110	24011102	Chip, 1k ohm, 1/20W
RX534	24871681	Chip, 680 ohm, 1/8W	RY113	24011331	Chip, 330 ohm, 1/20W
RX535	24000445	Chip Jumper, 1680 Type	RY114	24011102	Chip, 1k ohm, 1/20W
RX540	24011100	Chip, 10 ohm, 1/20W	RY120	24011821	Chip, 820 ohm, 1/20W
RX541	24011222	Chip, 2200 ohm, 1/20W	RY121	24011681	Chip, 680 ohm, 1/20W
RX542	24011121	Chip, 120 ohm, 1/20W	RY122	24871471	Chip, 470 ohm, 1/8W

Location No.	Part No.	Description	Location No.	Part No.	Description
RY123	24011561	Chip, 560 ohm, 1/20W	RY342	24011102	Chip, 1k ohm, 1/20W
RY124	24011272	Chip, 2700 ohm, 1/20W	RY343	24011273	Chip, 27k ohm, 1/20W
RY125	24011152	Chip, 1500 ohm, 1/20W	RY344	24011102	Chip, 1k ohm, 1/20W
RY126	24011561	Chip, 560 ohm, 1/20W	RY345	24011331	Chip, 330 ohm, 1/20W
RY127	24011272	Chip, 2700 ohm, 1/20W	RY346	24011152	Chip, 1500 ohm, 1/20W
RY128	24011152	Chip, 1500 ohm, 1/20W	RY347	24011102	Chip, 1k ohm, 1/20W
RY129	24011222	Chip, 2200 ohm, 1/20W	RY348	24011181	Chip, 180 ohm, 1/20W
RY131	24011101	Chip, 100 ohm, 1/20W	RY349	24011155	Chip, 1.5M ohm, 1/20W
RY132	24011101	Chip, 100 ohm, 1/20W	RY385	24011103	Chip, 10k ohm, 1/20W
RY133	24011101	Chip, 100 ohm, 1/20W	RY386	24011152	Chip, 1500 ohm, 1/20W
RY134	24011101	Chip, 100 ohm, 1/20W	RY388	24011622	Chip, 6200 ohm, 1/20W
RY135	24011101	Chip, 100 ohm, 1/20W	RY400	24011103	Chip, 10k ohm, 1/20W
RY136	24011101	Chip, 100 ohm, 1/20W	RY401	24011103	Chip, 10k ohm, 1/20W
RY138	24011331	Chip, 330 ohm, 1/20W	RY426	24011103	Chip, 10k ohm, 1/20W
RY139	24011222	Chip, 2200 ohm, 1/20W	RY440	24011103	Chip, 10k ohm, 1/20W
RY140	24011392	Chip, 3900 ohm, 1/20W	RY510	24011102	Chip, 1k ohm, 1/20W
RY150	24011102	Chip, 1k ohm, 1/20W	RY511	24011472	Chip, 4700 ohm, 1/20W
RY151	24011471	Chip, 470 ohm, 1/20W	RY520	24011472	Chip, 4700 ohm, 1/20W
RY152	24011102	Chip, 1k ohm, 1/20W	RY521	24011472	Chip, 4700 ohm, 1/20W
RY154	24011473	Chip, 47k ohm, 1/20W	RY522	24011472	Chip, 4700 ohm, 1/20W
RY155	24011102	Chip, 1k ohm, 1/20W	RY523	24011101	Chip, 100 ohm, 1/20W
RY156	24011182	Chip, 1800 ohm, 1/20W	RY525	24011101	Chip, 100 ohm, 1/20W
RY157	24011102	Chip, 1k ohm, 1/20W	RY527	24011101	Chip, 100 ohm, 1/20W
RY190	24011103	Chip, 10k ohm, 1/20W	RY529	24011472	Chip, 4700 ohm, 1/20W
RY220	24011821	Chip, 820 ohm, 1/20W	RY530	24011472	Chip, 4700 ohm, 1/20W
RY221	24011681	Chip, 680 ohm, 1/20W	RY531	24011472	Chip, 4700 ohm, 1/20W
RY222	24871471	Chip, 470 ohm, 1/8W	RY532	24011101	Chip, 100 ohm, 1/20W
RY223	24011561	Chip, 560 ohm, 1/20W	RY533	24011101	Chip, 100 ohm, 1/20W
RY224	24011272	Chip, 2700 ohm, 1/20W	RY534	24011101	Chip, 100 ohm, 1/20W
RY225	24011102	Chip, 1k ohm, 1/20W	RY544	24011103	Chip, 10k ohm, 1/20W
RY226	24011561	Chip, 560 ohm, 1/20W	RY545	24011103	Chip, 10k ohm, 1/20W
RY227	24011272	Chip, 2700 ohm, 1/20W	RY546	24011103	Chip, 10k ohm, 1/20W
RY228	24011102	Chip, 1k ohm, 1/20W	RY550	24011100	Chip, 10 ohm, 1/20W
RY230	24011101	Chip, 100 ohm, 1/20W	RY551	24011100	Chip, 10 ohm, 1/20W
RY231	24011101	Chip, 100 ohm, 1/20W	RY671	24011103	Chip, 10k ohm, 1/20W
RY232	24011101	Chip, 100 ohm, 1/20W	RY673	24011103	Chip, 10k ohm, 1/20W
RY233	24011101	Chip, 100 ohm, 1/20W	RY674	24011103	Chip, 10k ohm, 1/20W
RY256	24011101	Chip, 100 ohm, 1/20W	RY675	24011103	Chip, 10k ohm, 1/20W
RY257	24011101	Chip, 100 ohm, 1/20W	RY676	24011103	Chip, 10k ohm, 1/20W
RY300	24011152	Chip, 1500 ohm, 1/20W	RY677	24011103	Chip, 10k ohm, 1/20W
RY301	24011221	Chip, 220 ohm, 1/20W	RY703	24011103	Chip, 10k ohm, 1/20W
RY302	24011102	Chip, 1k ohm, 1/20W	RY721	24011152	Chip, 1500 ohm, 1/20W
RY303	24011273	Chip, 27k ohm, 1/20W	RY722	24011152	Chip, 1500 ohm, 1/20W
RY304	24011102	Chip, 1k ohm, 1/20W	RY723	24011152	Chip, 1500 ohm, 1/20W
RY305	24011331	Chip, 330 ohm, 1/20W	RY741	24011101	Chip, 100 ohm, 1/20W
RY306	24011152	Chip, 1500 ohm, 1/20W	RY742	24011101	Chip, 100 ohm, 1/20W
RY307	24011102	Chip, 1k ohm, 1/20W	RY743	24011101	Chip, 100 ohm, 1/20W
RY308	24011181	Chip, 180 ohm, 1/20W	RY747	24011102	Chip, 1k ohm, 1/20W
RY310	24011103	Chip, 10k ohm, 1/20W	RY751	24011222	Chip, 2200 ohm, 1/20W
RY311	24011103	Chip, 10k ohm, 1/20W	RY752	24011222	Chip, 2200 ohm, 1/20W
RY312	24011103	Chip, 10k ohm, 1/20W	RY753	24011222	Chip, 2200 ohm, 1/20W
RY313	24011103	Chip, 10k ohm, 1/20W	RY760	24011152	Chip, 1500 ohm, 1/20W
RY330	24011182	Chip, 1800 ohm, 1/20W	RY761	24011682	Chip, 6800 ohm, 1/20W
RY331	24011221	Chip, 220 ohm, 1/20W	RY762	24011103	Chip, 10k ohm, 1/20W
RY332	24000445	Chip Jumper, 1680 Type	RY764	24011102	Chip, 1k ohm, 1/20W
RY333	24011273	Chip, 27k ohm, 1/20W	RY767	24011101	Chip, 100 ohm, 1/20W
RY334	24011331	Chip, 330 ohm, 1/20W	RY771	24011101	Chip, 100 ohm, 1/20W
RY335	24011331	Chip, 330 ohm, 1/20W	RY773	24011101	Chip, 100 ohm, 1/20W
RY336	24011122	Chip, 1200 ohm, 1/20W	RY775	24011101	Chip, 100 ohm, 1/20W
RY337	24011102	Chip, 1k ohm, 1/20W	RY804	24011333	Chip, 33k ohm, 1/20W
RY338	24011181	Chip, 180 ohm, 1/20W	RY805	24011153	Chip, 15k ohm, 1/20W
RY339	24011155	Chip, 1.5M ohm, 1/20W	RY806	24011101	Chip, 100 ohm, 1/20W
RY340	24011152	Chip, 1500 ohm, 1/20W	RY808	24011100	Chip, 10 ohm, 1/20W
RY341	24011221	Chip, 220 ohm, 1/20W	RY810	24011101	Chip, 100 ohm, 1/20W

Location No.	Part No.	Description	Location No.	Part No.	Description
RY909	24011103	Chip, 10k ohm, 1/20W	L115	23103852	Coil, Filter, TEM2028AH
RZ01	24011330	Chip, 33 ohm, 1/20W	L121	23238562	Coil, Peaking, TRF4109AJ
RZ02	24011152	Chip, 1500 ohm, 1/20W	L122	23238562	Coil, Peaking, TRF4109AJ
RZ03	24011682	Chip, 6800 ohm, 1/20W	L301	23237975	Coil, Peaking, TRF4101AC
RZ04	24011392	Chip, 3900 ohm, 1/20W	L302	23248073	Coil, Choke, TLN3299D
RZ05	24011122	Chip, 1200 ohm, 1/20W	L303	23248073	Coil, Choke, TLN3299D
RZ06	24011431	Chip, 430 ohm, 1/20W	L304	23103859	Coil (Ferrite Bead), TEM2011
RZ07	24871331	Chip, 330 ohm, 1/8W	L305	23103775	Coil (Ferrite Bead), TEM2014
RZ08	24011151	Chip, 150 ohm, 1/20W	L402	23248191	Coil, Choke, TLN3351AD
RZ09	24011330	Chip, 33 ohm, 1/20W	△L403	23233995	Coil, Linearity, TLN2215AG
RZ10	24011102	Chip, 1k ohm, 1/20W	L406	23289560	Coil, Peaking, TRF4560AF
RZ11	24011561	Chip, 560 ohm, 1/20W	△L407	23248259	Coil, Choke, TLN3505AF
RZ12	24011182	Chip, 1800 ohm, 1/20W	△L408	23248248	Coil, Choke, TLN3500AH
RZ13	24011392	Chip, 3900 ohm, 1/20W	L409	23103775	Coil (Ferrite Bead), TEM2014
RZ14	24011123	Chip, 12k ohm, 1/20W	L410	23289120	Coil, Peaking, TRF4120AF
RZ15	24011151	Chip, 150 ohm, 1/20W	L411	23103775	Coil (Ferrite Bead), TEM2014
RZ16	24011102	Chip, 1k ohm, 1/20W	L413	23103880	Coil (Ferrite Bead), TEM2011Y
RZ17	24871181	Chip, 180 ohm, 1/8W	△L452	23248223	Coil, Choke, TLN3451AH
RZ18	24011121	Chip, 120 ohm, 1/20W	△L462	23231300	Deflection Yoke, TDY707MS
RZ21	24011271	Chip, 270 ohm, 1/20W	△L463	23231300	Deflection Yoke, TDY707MS
RZ26	24011102	Chip, 1k ohm, 1/20W	△L464	23231300	Deflection Yoke, TDY707MS
RZ28	24011102	Chip, 1k ohm, 1/20W	L472	23102457	Magnet, MAG-1102
RZ30	24000445	Chip Jumper, 1680 Type	L473	23102457	Magnet, MAG-1102
RZ31	24011104	Chip, 100k ohm, 1/20W	L474	23102457	Magnet, MAG-1102
RZ32	24000445	Chip Jumper, 1680 Type	L502	23289120	Coil, Peaking, TRF4120AF
RZ33	24011101	Chip, 100 ohm, 1/20W	L503	23289120	Coil, Peaking, TRF4120AF
RZ34	24011101	Chip, 100 ohm, 1/20W	L504	23103827	Chip (Ferrite Bead), TEM2120M
RZ49	24011102	Chip, 1k ohm, 1/20W	L506	23103827	Chip (Ferrite Bead), TEM2120M
RZ60	24011102	Chip, 1k ohm, 1/20W	L518	23245834	Chip, Inductor, TRF4220CB
RZ64	24011221	Chip, 220 ohm, 1/20W	L701	23237987	Coil, Peaking, TRF4100AC
RZ65	24011224	Chip, 220k ohm, 1/20W	L702	23261974	Coil, Choke, HC5-035
RZ66	24011223	Chip, 22k ohm, 1/20W	L704	23103859	Coil (Ferrite Bead), TEM2011
RZ67	24011102	Chip, 1k ohm, 1/20W	L705	23103859	Coil (Ferrite Bead), TEM2011
RZ68	24011222	Chip, 2200 ohm, 1/20W	L764	23103859	Coil (Ferrite Bead), TEM2011
RZ69	24011153	Chip, 15k ohm, 1/20W	L765	23103859	Coil (Ferrite Bead), TEM2011
RZ70	24011472	Chip, 4700 ohm, 1/20W	L766	23261974	Coil, Choke, HC5-035
RZ71	24011101	Chip, 100 ohm, 1/20W	L769	23237987	Coil, Peaking, TRF4100AC
RZ72	24011103	Chip, 10k ohm, 1/20W	L780	23237987	Coil, Peaking, TRF4100AC
RZ73	24011103	Chip, 10k ohm, 1/20W	L781	23103859	Coil (Ferrite Bead), TEM2011
RZ74	24872229	Chip, 2.2 ohm, 1/16W	L782	23103859	Coil (Ferrite Bead), TEM2011
RZ101	24011101	Chip, 100 ohm, 1/20W	L783	23261974	Coil, Choke, HC5-035
RZ102	24011221	Chip, 220 ohm, 1/20W	L851	23103880	Coil (Ferrite Bead), TEM2011Y
RZ103	24011102	Chip, 1k ohm, 1/20W	L852	23103880	Coil (Ferrite Bead), TEM2011Y
RZ104	24011102	Chip, 1k ohm, 1/20W	L853	23289842	Coil, Peaking, TRF4220AT
RZ105	24011821	Chip, 820 ohm, 1/20W	L861	23103880	Coil (Ferrite Bead), TEM2011Y
RZ106	24000445	Chip Jumper, 1680 Type	L862	23103859	Coil (Ferrite Bead), TEM2011
RZ107	24011751	Chip, 750 ohm, 1/20W	L881	23103880	Coil (Ferrite Bead), TEM2011Y
RZ109	24011102	Chip, 1k ohm, 1/20W	L882	23103880	Coil (Ferrite Bead), TEM2011Y
RZ110	24011152	Chip, 1500 ohm, 1/20W	L885	23248073	Coil, Choke, TLN3299D
RZ243	24011220	Chip, 22 ohm, 1/20W	L888	23103880	Coil (Ferrite Bead), TEM2011Y
RZ244	24011152	Chip, 1500 ohm, 1/20W	L889	23103880	Coil (Ferrite Bead), TEM2011Y
RZ245	24011220	Chip, 22 ohm, 1/20W	L891	23103880	Coil (Ferrite Bead), TEM2011Y
RZ246	24011152	Chip, 1500 ohm, 1/20W	L892	23103880	Coil (Ferrite Bead), TEM2011Y
RZ265	24011472	Chip, 4700 ohm, 1/20W	L893	23103880	Coil (Ferrite Bead), TEM2011Y
RZ266	24011103	Chip, 10k ohm, 1/20W	L894	23103880	Coil (Ferrite Bead), TEM2011Y
RZ800	24871330	Chip, 33 ohm, 1/8W	L895	70211045	Coil, Choke, 0.02mH
RZ802	24871330	Chip, 33 ohm, 1/8W	L896	70211045	Coil, Choke, 0.02mH
RZ804	24011330	Chip, 33 ohm, 1/20W	L897	23248073	Coil, Choke, TLN3299D
COILS & TRANSFORMERS					
L101	23289680	Coil, Peaking, TRF4680AF	L898	23248073	Coil, Choke, TLN3299D
L103	23289470	Coil, Peaking, TRF4470AF	L902	23289479	Coil, Peaking, TRF44R7AF
L111	23289680	Coil, Peaking, TRF4680AF	L903	23289680	Coil, Peaking, TRF4680AF
L113	23289220	Coil, Peaking, TRF4220AF	L911	23237987	Coil, Peaking, TRF4100AC

Location No.	Part No.	Description	Location No.	Part No.	Description
L912	23289680	Coil, Peaking, TRF4680AF	LX112	23103906	Chip (Ferrite Bead), TEM2118AS
L913	23289479	Coil, Peaking, TRF44R7AF	LX113	23103806	Chip (Ferrite Bead), TEM2114T
L915	23289100	Coil, Peaking, TRF4100AF	LX131	23246199	Chip, Inductor, TRF42R2CG
L922	23289680	Coil, Peaking, TRF4680AF	LX132	23246323	Chip, Inductor, TRF44R7CT
L923	23289479	Coil, Peaking, TRF44R7AF	LX161	23246199	Chip, Inductor, TRF42R2CG
L925	23289100	Coil, Peaking, TRF4100AF	LX162	23246323	Chip, Inductor, TRF44R7CT
L961	23238714	Coil, Peaking, TRF4100AJ	LX197	24000445	Chip Jumper, 1680 Type
L962	23289100	Coil, Peaking, TRF4100AF	LX198	23103906	Chip (Ferrite Bead), TEM2118AS
L963	23237975	Coil, Peaking, TRF4101AC	LX199	23103906	Chip (Ferrite Bead), TEM2118AS
L7701	23103859	Coil (Ferrite Bead), TEM2011	LX201	23103906	Chip (Ferrite Bead), TEM2118AS
L7702	23103859	Coil (Ferrite Bead), TEM2011	LX206	23103906	Chip (Ferrite Bead), TEM2118AS
L7703	23103859	Coil (Ferrite Bead), TEM2011	LX207	23103906	Chip (Ferrite Bead), TEM2118AS
L7704	23103859	Coil (Ferrite Bead), TEM2011	LX211	23103906	Chip (Ferrite Bead), TEM2118AS
L7705	23103859	Coil (Ferrite Bead), TEM2011	LX221	23103906	Chip (Ferrite Bead), TEM2118AS
L7706	23103859	Coil (Ferrite Bead), TEM2011	LX222	23103906	Chip (Ferrite Bead), TEM2118AS
L7710	23248195	Coil, Choke, TLN3441AT	LX223	23103906	Chip (Ferrite Bead), TEM2118AS
L7711	23248195	Coil, Choke, TLN3441AT	LX224	23103906	Chip (Ferrite Bead), TEM2118AS
LA22	23245830	Chip, Inductor, TRF4100CB	LX225	23103906	Chip (Ferrite Bead), TEM2118AS
LA49	23245830	Chip, Inductor, TRF4100CB	LX231	23103906	Chip (Ferrite Bead), TEM2118AS
LB42	23245830	Chip, Inductor, TRF4100CB	LX241	23103906	Chip (Ferrite Bead), TEM2118AS
LH001	23103864	Chip (Ferrite Bead), TEM2103T	LX242	23103906	Chip (Ferrite Bead), TEM2118AS
LH002	23103864	Chip (Ferrite Bead), TEM2103T	LX243	23103906	Chip (Ferrite Bead), TEM2118AS
LH003	23103859	Coil (Ferrite Bead), TEM2011	LX244	23103906	Chip (Ferrite Bead), TEM2118AS
LH004	23103859	Coil (Ferrite Bead), TEM2011	LX245	23103906	Chip (Ferrite Bead), TEM2118AS
LH005	23103859	Coil (Ferrite Bead), TEM2011	LX301	23103886	Chip (Ferrite Bead), TEM2129AM
LH007	23103795	Chip, Impeder, MMZ2012S301A	LX311	23103886	Chip (Ferrite Bead), TEM2129AM
LH009	23103795	Chip, Impeder, MMZ2012S301A	LX321	23103906	Chip (Ferrite Bead), TEM2118AS
LH010	23103795	Chip, Impeder, MMZ2012S301A	LX322	23103906	Chip (Ferrite Bead), TEM2118AS
LH012	23103859	Coil (Ferrite Bead), TEM2011	LX341	23103906	Chip (Ferrite Bead), TEM2118AS
LH061	23103864	Chip (Ferrite Bead), TEM2103T	LX342	23103906	Chip (Ferrite Bead), TEM2118AS
LH062	23103864	Chip (Ferrite Bead), TEM2103T	LX344	23103806	Chip (Ferrite Bead), TEM2114T
LH063	23103864	Chip (Ferrite Bead), TEM2103T	LX362	23103886	Chip (Ferrite Bead), TEM2129AM
LH064	23103864	Chip (Ferrite Bead), TEM2103T	LX471	23103906	Chip (Ferrite Bead), TEM2118AS
LH065	23103864	Chip (Ferrite Bead), TEM2103T	LX473	23246325	Chip, Inductor, TRF4220CT
LH066	23103864	Chip (Ferrite Bead), TEM2103T	LX509	23103906	Chip (Ferrite Bead), TEM2118AS
LH067	23103864	Chip (Ferrite Bead), TEM2103T	LX510	23103906	Chip (Ferrite Bead), TEM2118AS
LH120	23103864	Chip (Ferrite Bead), TEM2103T			
LH122	23103864	Chip (Ferrite Bead), TEM2103T			
LH123	23103864	Chip (Ferrite Bead), TEM2103T			
LH124	23103864	Chip (Ferrite Bead), TEM2103T			
LH125	23103864	Chip (Ferrite Bead), TEM2103T			
LH126	23103864	Chip (Ferrite Bead), TEM2103T			
LM09	23103906	Chip (Ferrite Bead), TEM2118AS			
LV05	23289560	Coil, Peaking, TRF4560AF			
LV06	23289560	Coil, Peaking, TRF4560AF			
LV07	23289100	Coil, Peaking, TRF4100AF			
LV11	23289100	Coil, Peaking, TRF4100AF			
LV13	23289100	Coil, Peaking, TRF4100AF			
LV14	23289100	Coil, Peaking, TRF4100AF			
LV19	23238705	Coil, Peaking, TRF4560AJ			
LV41	23289470	Coil, Peaking, TRF4470AF			
LV502	23103906	Chip (Ferrite Bead), TEM2118AS			
LV503	23103906	Chip (Ferrite Bead), TEM2118AS			
LX101	23246199	Chip, Inductor, TRF42R2CG			
LX102	23246323	Chip, Inductor, TRF44R7CT			
LX111	23103906	Chip (Ferrite Bead), TEM2118AS			

Location No.	Part No.	Description	Location No.	Part No.	Description
LX521	23246199	Chip, Inductor, TRF42R2CG	LZ05	23103906	Chip (Ferrite Bead), TEM2118AS
LX531	23246323	Chip, Inductor, TRF44R7CT	LZ09	23103906	Chip (Ferrite Bead), TEM2118AS
LX541	23246323	Chip, Inductor, TRF44R7CT	LZ20	23246316	Chip, Inductor, TRF44R7CR
LX824	24000445	Chip Jumper, 1680 Type	LZ21	23246317	Chip, Inductor, TRF4100CR
LX825	24000445	Chip Jumper, 1680 Type	LZ22	23246199	Chip, Inductor, TRF42R2CG
LX826	24000445	Chip Jumper, 1680 Type	LZ25	23103906	Chip (Ferrite Bead), TEM2118AS
LX827	24000445	Chip Jumper, 1680 Type	LZ26	23103906	Chip (Ferrite Bead), TEM2118AS
LX829	24000445	Chip Jumper, 1680 Type	LZ28	23103906	Chip (Ferrite Bead), TEM2118AS
LX844	24000445	Chip Jumper, 1680 Type	LZ29	23103906	Chip (Ferrite Bead), TEM2118AS
LX845	24000445	Chip Jumper, 1680 Type	LZ30	24000445	Chip Jumper, 1680 Type
LY09	23103827	Chip (Ferrite Bead), TEM2120M	LZ31	23103906	Chip (Ferrite Bead), TEM2118AS
LY22	23103824	Coil, TEM2028K	LZ32	23103906	Chip (Ferrite Bead), TEM2118AS
LY64	23103827	Chip (Ferrite Bead), TEM2120M	LZ34	24000445	Chip Jumper, 1680 Type
LY121	23103827	Chip (Ferrite Bead), TEM2120M	LZ35	23103906	Chip (Ferrite Bead), TEM2118AS
LY122	23103827	Chip (Ferrite Bead), TEM2120M	LZ36	23103906	Chip (Ferrite Bead), TEM2118AS
LY123	23103827	Chip (Ferrite Bead), TEM2120M	LZ38	23103906	Chip (Ferrite Bead), TEM2118AS
LY124	23103827	Chip (Ferrite Bead), TEM2120M	LZ39	23103906	Chip (Ferrite Bead), TEM2118AS
LY125	23103827	Chip (Ferrite Bead), TEM2120M	LZ96	23246206	Chip, Inductor, TRF48R2CG
LY126	23103827	Chip (Ferrite Bead), TEM2120M	LZ100	23246223	Chip, Inductor, TRF4330CG
LY127	23103806	Chip (Ferrite Bead), TEM2114T	LZ101	23103827	Chip (Ferrite Bead), TEM2120M
LY128	23103806	Chip (Ferrite Bead), TEM2114T	LZ102	23103827	Chip (Ferrite Bead), TEM2120M
LY129	23103827	Chip (Ferrite Bead), TEM2120M	LZ103	23103906	Chip (Ferrite Bead), TEM2118AS
LY130	23103827	Chip (Ferrite Bead), TEM2120M	LZ104	23246219	Chip, Inductor, TRF4150CG
LY131	23103827	Chip (Ferrite Bead), TEM2120M	LZ105	23246222	Chip, Inductor, TRF4270CG
LY170	23103806	Chip (Ferrite Bead), TEM2114T	LZ106	24000445	Chip Jumper, 1680 Type
LY227	23103806	Chip (Ferrite Bead), TEM2114T	T401	23224371	Transformer, Horiz, Drive, TLN1080AH
LY300	24000445	Chip Jumper, 1680 Type	T403	23224364	Transformer, Focus, TLN2168AH
LY301	24000445	Chip Jumper, 1680 Type	▲T461	23236635	Transformer, Flyback, TFB3088AD
LY302	24000445	Chip Jumper, 1680 Type	T461A	23192940	Anode Cap, TCCP5157
LY330	23103806	Chip (Ferrite Bead), TEM2114T	T801	23211698	Line Filter, TRF3218AK
LY331	23103806	Chip (Ferrite Bead), TEM2114T	T802	23211712	Line Filter, TRF3209BQ
LY340	24000445	Chip Jumper, 1680 Type	T840	23217481	Transformer, Power, TPW1562AZ
LY341	24000445	Chip Jumper, 1680 Type	T862	23217467	Transformer, Converter, TPW3450AS
LY342	24000445	Chip Jumper, 1680 Type			
LY502	23103906	Chip (Ferrite Bead), TEM2118AS			
LY503	23103906	Chip (Ferrite Bead), TEM2118AS			
LY701	24000445	Chip Jumper, 1680 Type			
LY800	23103827	Chip (Ferrite Bead), TEM2120M			
LY804	23103828	Chip (Ferrite Bead), TEM2121M			
LY806	23103828	Chip (Ferrite Bead), TEM2121M			
LY807	23103906	Chip (Ferrite Bead), TEM2118AS			
LY808	23103827	Chip (Ferrite Bead), TEM2120M			
LY809	23103827	Chip (Ferrite Bead), TEM2120M			
LZ03	24000445	Chip Jumper, 1680 Type			

SEMICONDUCTORS

Q151	23314962	Transistor, KTA1266 Y
Q152	23314965	Transistor, KTC3198 Y
Q201	A6335470	Transistor, 2SC2712-Y
Q210	A6549570	Transistor, 2SA1586-Y
Q211	23314993	Transistor, 2SC4081T106Q
Q221	A6330059	Transistor, 2SC2482(C)
Q301	B0351501	IC, TA75902P(J)
Q302	B0384625	IC, TA8859CP
Q303	23314965	Transistor, KTC3198 Y

Location No.	Part No.	Description	Location No.	Part No.	Description
Q304	B0351501	IC, TA75902P(J)	Q681	A6359870	Transistor, 2SC3326-B
Q305	A6541130	Transistor, 2SA1162-Y	Q682	A6359870	Transistor, 2SC3326-B
Q306	23319787	IC, LA7833S	Q706	23114528	Transistor, 2SC1740S, Q
Q306B	70391355	Screw, BITTB3X8 SZN	Q707	A6734590	Transistor, 2SC752(G)TM-Y
Q308	23314965	Transistor, KTC3198 Y	Q709	23114528	Transistor, 2SC1740S, Q
Q309	23314962	Transistor, KTA1266 Y	Q710	23114530	Transistor, 2SA933S-Q
Q310	23314965	Transistor, KTC3198 Y	Q711	23314911	Transistor, 2SB1569A E
Q311	A6002020	Transistor, RN1202	Q711B	70391355	Screw, BITTB3X8 SZN
Q350	23904896	IC, JLC1562BFEL	Q712	23314914	Transistor, 2SD2400A E
Q403	A6073390	Transistor, 2SK2920	Q712B	70391355	Screw, BITTB3X8 SZN
Q404	A6371775	Transistor, 2SC5144	Q719	23114528	Transistor, 2SC1740S, Q
Q404B	72471082	Screw, BRDT2W3X10 SZN	Q720	23114528	Transistor, 2SC1740S, Q
Q404E	A8012650	Spacer, AC263	Q751	23905094	IC, STR392-110
Q406	23314548	Transistor, 2SC4256	Q752	23905094	IC, STR392-110
Q407	B0347500	IC, TA75358P	Q755	23904521	IC, AN7805
Q410	A6064650	Transistor, 2SK941	Q757	A6335470	Transistor, 2SC2712-Y
Q410	A6549570	Transistor, 2SA1586-Y	Q758	A6335470	Transistor, 2SC2712-Y
Q411	23314965	Transistor, KTC3198 Y	Q759	A6541130	Transistor, 2SA1162-Y
Q411	A6734590	Transistor, 2SC752(G)TM-Y	Q760	23114530	Transistor, 2SA933S-Q
Q412	23114530	Transistor, 2SA933S-Q	Q761	23314911	Transistor, 2SB1569A E
Q412	A6002030	Transistor, RN1203	Q761	A6541130	Transistor, 2SA1162-Y
Q413	A6734590	Transistor, 2SC752(G)TM-Y	Q761B	70391355	Screw, BITTB3X8 SZN
Q415	23318981	IC, MC14053BFEL	Q762	A6335470	Transistor, 2SC2712-Y
Q415	A6002030	Transistor, RN1203	Q764	B0485884	IC, TC74HC14AF
Q416	23314965	Transistor, KTC3198 Y	Q765	A6335470	Transistor, 2SC2712-Y
Q416	A6361770	Transistor, 2SC3437-Y	Q766	A6335470	Transistor, 2SC2712-Y
Q417	23314965	Transistor, KTC3198 Y	Q767	B0488448	IC, TC74HC4066AF
Q417	A6361770	Transistor, 2SC3437-Y	Q769	23114528	Transistor, 2SC1740S, Q
Q418	A6004020	Transistor, RN1402	Q771	23314914	Transistor, 2SD2400A E
Q420	23316816	IC, LA7860	Q771B	70391355	Screw, BITTB3X8 SZN
Q421	A6734590	Transistor, 2SC752(G)TM-Y	Q772	A6541130	Transistor, 2SA1162-Y
Q423	A6002030	Transistor, RN1203	Q773	A6335470	Transistor, 2SC2712-Y
Q424	23904353	IC, AN7712F	Q779	23114528	Transistor, 2SC1740S, Q
Q424	A6361770	Transistor, 2SC3437-Y	Q781	23114528	Transistor, 2SC1740S, Q
Q425	A6361770	Transistor, 2SC3437-Y	Q782	23114530	Transistor, 2SA933S-Q
Q426	A6335470	Transistor, 2SC2712-Y	Q782	23318840	IC, AN79M05F
Q427	23314962	Transistor, KTA1266 Y	Q783	23114528	Transistor, 2SC1740S, Q
Q470	B01A0156	IC, TA1318N	Q784	23314911	Transistor, 2SB1569A E
Q481	B0347235	IC, TA75339AP	Q784B	70391355	Screw, BITTB3X8 SZN
Q490	23314965	Transistor, KTC3198 Y	Q785	23314914	Transistor, 2SD2400A E
Q491	A6002030	Transistor, RN1203	Q785B	70391355	Screw, BITTB3X8 SZN
Q501	B0386049	IC, TA1270AF(J)	Q796	A6335470	Transistor, 2SC2712-Y
Q502	23000263	IC, BU4053BCF-E2	Q797	B0352035	IC, TA75S393F
Q503	A6549570	Transistor, 2SA1586-Y	Q798	A6030110	IC, TC4S66F
Q504	23314993	Transistor, 2SC4081T106Q	Q799	A6030110	IC, TC4S66F
Q510	B01A0150	IC, TA1316N	Q801	23135015	IC, STR-Z4369
Q520	23114530	Transistor, 2SA933S-Q	Q820	23314965	Transistor, KTC3198 Y
Q521	23114530	Transistor, 2SA933S-Q	Q821	A6000050	Transistor, RN1005
Q522	23114530	Transistor, 2SA933S-Q	Q830	23904163	IC, SI-3090CA
Q523	A6335470	Transistor, 2SC2712-Y	Q831	23905976	IC, PQ05RD11
Q524	A6004010	Transistor, RN1401	Q840	23906689	IC, PQ05RR11
Q525	A6004010	Transistor, RN1401	Q840B	70391356	Screw, BITTB3X10 SZN
Q526	A6004010	Transistor, RN1401	Q843	A6002060	Transistor, RN1206
Q527	A6541130	Transistor, 2SA1162-Y	Q862	A8643112	Photo Coupler, TLP621(GRL-L
Q528	A6541130	Transistor, 2SA1162-Y	Q901	A6372621	Transistor, 2SC5360
Q529	A6541130	Transistor, 2SA1162-Y	Q902	A6317440	Transistor, 2SC1815-Y
Q601	B0376885	IC, TA8216H	Q911	A6372621	Transistor, 2SC5360
Q612	A6541130	Transistor, 2SA1162-Y	Q912	A6317440	Transistor, 2SC1815-Y
Q621	23000381	IC, CXA2021S	Q913	A6534145	Transistor, 2SA1020-Y(C)
Q622	B01A0119	IC, TA1304F(EL)	Q914	A6317440	Transistor, 2SC1815-Y
Q661	A6359870	Transistor, 2SC3326-B	Q915	A6317440	Transistor, 2SC1815-Y
Q662	A6359870	Transistor, 2SC3326-B	Q916	A6317440	Transistor, 2SC1815-Y
Q663	23906596	IC, BA4558	Q917	A6317440	Transistor, 2SC1815-Y
Q664	A6014040	Transistor, RN2404	Q918	A6317440	Transistor, 2SC1815-Y

Location No.	Part No.	Description	Location No.	Part No.	Description
Q919	A6317440	Transistor, 2SC1815-Y	QV30	23905590	IC, M52055FP
Q920	A6317440	Transistor, 2SC1815-Y	QV31	A6335470	Transistor, 2SC2712-Y
Q921	A6372621	Transistor, 2SC5360	QV37	A6541130	Transistor, 2SA1162-Y
Q922	A6317440	Transistor, 2SC1815-Y	QV38	A6541130	Transistor, 2SA1162-Y
Q961	A6317440	Transistor, 2SC1815-Y	QV39	A6541130	Transistor, 2SA1162-Y
Q962	A6534145	Transistor, 2SA1020-Y(C)	QV48	23114528	Transistor, 2SC1740S, Q
Q963	A6317440	Transistor, 2SC1815-Y	QV49	23114528	Transistor, 2SC1740S, Q
Q964	A6534040	Transistor, 2SA1015-Y	QV501	23318981	IC, MC14053BFEL
Q965	A6317440	Transistor, 2SC1815-Y	QV504	A6549570	Transistor, 2SA1586-Y
Q966	A6534040	Transistor, 2SA1015-Y	QV505	A6549570	Transistor, 2SA1586-Y
Q968	A6317440	Transistor, 2SC1815-Y	QV506	A6549570	Transistor, 2SA1586-Y
Q971	A6534040	Transistor, 2SA1015-Y	QV507	A6549570	Transistor, 2SA1586-Y
Q972	A6534040	Transistor, 2SA1015-Y	QV508	A6549570	Transistor, 2SA1586-Y
Q973	A6534145	Transistor, 2SA1020-Y(C)	QV509	A6549570	Transistor, 2SA1586-Y
Q974	A6317440	Transistor, 2SC1815-Y	QV524	23314993	Transistor, 2SC4081T106Q
Q975	A6734590	Transistor, 2SC752(G)TM-Y	QW05	A6335470	Transistor, 2SC2712-Y
QA01	23000473	IC, MN102L35GFD	QW08	A6335470	Transistor, 2SC2712-Y
QA02	23906642	IC, AT24C64-10PC	QW11	A6335470	Transistor, 2SC2712-Y
QA04	23905321	IC, 24LC16B-I/P	QW17	A6002010	Transistor, RN1201
QA05	70119743	IC, PST523D	QX11	23905770	IC, PQ3RF23
QA71	A6541130	Transistor, 2SA1162-Y	QX101	23314993	Transistor, 2SC4081T106Q
QB03	A6004050	Transistor, RN1405	QX102	23314347	Transistor, IMX2 T108
QB11	23114528	Transistor, 2SC1740S, Q	QX103	23314993	Transistor, 2SC4081T106Q
QB14	A6541130	Transistor, 2SA1162-Y	QX104	23314993	Transistor, 2SC4081T106Q
QB30	23314965	Transistor, KTC3198 Y	QX108	23314993	Transistor, 2SC4081T106Q
QB61	A6361770	Transistor, 2SC3437-Y	QX109	A6030670	IC, TC7S66F
QB84	A6335470	Transistor, 2SC2712-Y	QX110	A6549570	Transistor, 2SA1586-Y
QB85	A6541130	Transistor, 2SA1162-Y	QX131	23314993	Transistor, 2SC4081T106Q
QB86	A6541130	Transistor, 2SA1162-Y	QX132	23314347	Transistor, IMX2 T108
QB87	A6541130	Transistor, 2SA1162-Y	QX133	23314993	Transistor, 2SC4081T106Q
QB88	A6541130	Transistor, 2SA1162-Y	QX134	23314993	Transistor, 2SC4081T106Q
QD01	B01A0107	IC, TA2136N	QX138	23314993	Transistor, 2SC4081T106Q
QH001	B01B4088	IC, TC190C060AF-	QX139	A6030670	IC, TC7S66F
QH004	B0485893	IC, TC74HC244AF	QX140	A6549570	Transistor, 2SA1586-Y
QH005	23905013	IC, TLC29321PW	QX161	23314993	Transistor, 2SC4081T106Q
QH006	23906908	IC, MC33078DR2	QX162	23314347	Transistor, IMX2 T108
QH120	23318897	IC, PCM56P-L	QX163	23314993	Transistor, 2SC4081T106Q
QH121	23318897	IC, PCM56P-L	QX164	23314993	Transistor, 2SC4081T106Q
QH140	23318897	IC, PCM56P-L	QX168	23314993	Transistor, 2SC4081T106Q
QH141	23318897	IC, PCM56P-L	QX169	A6030670	IC, TC7S66F
QH160	23318897	IC, PCM56P-L	QX170	A6549570	Transistor, 2SA1586-Y
QH161	23318897	IC, PCM56P-L	QX191	23000197	IC, SN74AHC2G53H
QH170	23906909	IC, MC33079DR2	QX192	23314345	Transistor, IMZ1 T108
QH171	23906909	IC, MC33079DR2	QX195	A6030695	IC, TC7SH32FU(BR)
QH172	23906909	IC, MC33079DR2	QX196	A6030695	IC, TC7SH32FU(BR)
QH173	23905320	IC, NM24C16EN	QX201	23314993	Transistor, 2SC4081T106Q
QH177	23904743	IC, LC89066M	QX202	23314993	Transistor, 2SC4081T106Q
QR02	A6335470	Transistor, 2SC2712-Y	QX211	23000283	IC, R1121N331B-T
QR03	A6004020	Transistor, RN1402	QX219	A6030670	IC, TC7S66F
QR14	A6541130	Transistor, 2SA1162-Y	QX220	23905939	IC, TLC2933IPW
QR15	A6541130	Transistor, 2SA1162-Y	QX221	A6030620	IC, TC7S04F
QR16	A6541130	Transistor, 2SA1162-Y	QX231	23000283	IC, R1121N331B-T
QS01	A6342200	Transistor, 2CS2878-A	QX240	23905013	IC, TLC29321PW
QS11	A6342200	Transistor, 2CS2878-A	QX241	A6030620	IC, TC7S04F
QS12	A6012040	Transistor, RN2204	QX300	23000365	IC, TC90A63F
QS13	23314965	Transistor, KTC3198 Y	QX310	23000198	IC, EM636327Q-8
QS14	23314965	Transistor, KTC3198 Y	QX322	23314352	Transistor, IMT2 T108
QV01	B0384761	IC, TA8851CN	QX332	23314352	Transistor, IMT2 T108
QV10	23114528	Transistor, 2SC1740S, Q	QX470	B0487819	IC, TC74HCT32AF
QV20	A6002040	Transistor, RN1204	QX471	23314993	Transistor, 2SC4081T106Q
QV21	23114528	Transistor, 2SC1740S, Q	QX472	23314993	Transistor, 2SC4081T106Q
QV22	23114530	Transistor, 2SA933S-Q	QX521	A6549570	Transistor, 2SA1586-Y
QV23	23114530	Transistor, 2SA933S-Q	QX522	A6549570	Transistor, 2SA1586-Y
QV28	A6002030	Transistor, RN1203	QX531	A6549570	Transistor, 2SA1586-Y

Location No.	Part No.	Description	Location No.	Part No.	Description
QX532	A6549570	Transistor, 2SA1586-Y	QZ21	23314993	Transistor, 2SC4081T106Q
QX541	A6549570	Transistor, 2SA1586-Y	QZ22	23314993	Transistor, 2SC4081T106Q
QX542	A6549570	Transistor, 2SA1586-Y	QZ23	A6549570	Transistor, 2SA1586-Y
QX904	23314993	Transistor, 2SC4081T106Q	QZ24	23314993	Transistor, 2SC4081T106Q
QX910	23000263	IC, BU4053BCF-E2	QZ100	B0410868	IC, TC90A45F
QX951	23000263	IC, BU4053BCF-E2	QZ101	23314993	Transistor, 2SC4081T106Q
QX952	23314993	Transistor, 2SC4081T106Q	QZ102	23314993	Transistor, 2SC4081T106Q
QX953	23314993	Transistor, 2SC4081T106Q	QZ103	A6549570	Transistor, 2SA1586-Y
QY01	B0386049	IC, TA1270AF(J)	D101	23316756	Diode, Zener, MTZJ33D
QY03	A7010005	IC, TC90A66(BR,	D215	23118041	Diode, MA111-(TX)
QY06	23000408	IC, 1V04166-30TB	D216	23118041	Diode, MA111-(TX)
QY10	A6549570	Transistor, 2SA1586-Y	D217	23118041	Diode, MA111-(TX)
QY12	A6549570	Transistor, 2SA1586-Y	D218	23118041	Diode, MA111-(TX)
QY20	23000376	IC, BA033LBSG-TR	D219	23118041	Diode, MA111-(TX)
QY21	23000283	IC, R1121N331B-T	D220	23118041	Diode, MA111-(TX)
QY30	23314993	Transistor, 2SC4081T106Q	D301	23316682	Diode, Zener, MTZJ7.5C
QY101	A6549570	Transistor, 2SA1586-Y	D302	23118094	Diode, EU2A, LF-F10
QY104	23314993	Transistor, 2SC4081T106Q	D303	23316732	Diode, Zener, MTZJ18C
QY105	23314993	Transistor, 2SC4081T106Q	D304	23316794	Diode, SC570ALFE2
QY106	23314993	Transistor, 2SC4081T106Q	D305	23118822	Diode, ERB12-02
QY107	A6549570	Transistor, 2SA1586-Y	D306	23118822	Diode, ERB12-02
QY108	A6549570	Transistor, 2SA1586-Y	D307	23118859	Diode, 1SS133
QY109	A6549570	Transistor, 2SA1586-Y	D310	23118041	Diode, MA111-(TX)
QY116	23314993	Transistor, 2SC4081T106Q	D336	23118859	Diode, 1SS133
QY207	A6549570	Transistor, 2SA1586-Y	D337	23118859	Diode, 1SS133
QY208	A6549570	Transistor, 2SA1586-Y	D401	23118094	Diode, EU2A, LF-F10
QY209	A6549570	Transistor, 2SA1586-Y	D402	23118094	Diode, EU2A, LF-F10
QY260	23114528	Transistor, 2SC1740S, Q	D403	23224366	Diode, FMQ-3GU
QY300	23000366	IC, TLC2943IDB	D404	23316254	Diode, ERC06-15L
QY301	A6030630	IC, TC7S08F	D406	23118094	Diode, EU2A, LF-F10
QY302	A6030670	IC, TC7S66F	D407	23316731	Diode, Zener, MTZJ18B
QY330	23905939	IC, TLC2933IPW	D408	A7978850	Diode, S5295G
QY331	A6030620	IC, TC7S04F	D411	23316666	Diode, Zener, MTZJ4.7B
QY332	A6030670	IC, TC7S66F	D412	23118041	Diode, MA111-(TX)
QY333	A6030898	IC, TC4W53FU(BRA	D412	23118094	Diode, EU2A, LF-F10
QY341	A6030620	IC, TC7S04F	D413	23118041	Diode, MA111-(TX)
QY342	A6030670	IC, TC7S66F	D413	23118707	Diode, RP 1H, LF-C1
QY382	23314993	Transistor, 2SC4081T106Q	D414	23118041	Diode, MA111-(TX)
QY501	23318981	IC, MC14053BFEL	D415	23118041	Diode, MA111-(TX)
QY504	A6549570	Transistor, 2SA1586-Y	D415	23118707	Diode, RP 1H, LF-C1
QY505	A6549570	Transistor, 2SA1586-Y	D416	23118041	Diode, MA111-(TX)
QY506	A6549570	Transistor, 2SA1586-Y	D417	23316591	Diode, Zener, MA8100-M, TX
QY507	A6549570	Transistor, 2SA1586-Y	D418	23316591	Diode, Zener, MA8100-M, TX
QY508	A6549570	Transistor, 2SA1586-Y	D435	23118094	Diode, EU2A, LF-F10
QY509	A6549570	Transistor, 2SA1586-Y	D436	23118094	Diode, EU2A, LF-F10
QY524	23314993	Transistor, 2SC4081T106Q	D441	23118859	Diode, 1SS133
QY700	B0386238	IC, TA1287F	D442	23316731	Diode, Zener, MTZJ18B
QY721	23314993	Transistor, 2SC4081T106Q	D444	23118859	Diode, 1SS133
QY722	23314993	Transistor, 2SC4081T106Q	△D482	23115774	Diode, Zener, RD6.2E(4)
QY723	23314993	Transistor, 2SC4081T106Q	D520	23316647	Diode, Zener, MTZJ2.0B
QY751	23314993	Transistor, 2SC4081T106Q	D521	23118041	Diode, MA111-(TX)
QY752	23314993	Transistor, 2SC4081T106Q	D522	23118041	Diode, MA111-(TX)
QY753	23314993	Transistor, 2SC4081T106Q	D523	23118041	Diode, MA111-(TX)
QY760	23314993	Transistor, 2SC4081T106Q	D531	23316573	Diode, Zener, MA8062-L, TX
QZ01	23000108	IC, μPD64082	D532	23118822	Diode, ERB12-02
QZ02	23000438	IC, B416256A-35J	D533	23316686	Diode, Zener, MTZJ9.1A
QZ04	A6549570	Transistor, 2SA1586-Y	D601	23118041	Diode, MA111-(TX)
QZ05	A6549570	Transistor, 2SA1586-Y	D602	23118041	Diode, MA111-(TX)
QZ06	23314993	Transistor, 2SC4081T106Q	D603	23118041	Diode, MA111-(TX)
QZ14	A6549570	Transistor, 2SA1586-Y	D604	23118041	Diode, MA111-(TX)
QZ16	23314993	Transistor, 2SC4081T106Q	D607	23316616	Diode, Zener, MA8220-M, TX
QZ17	A6549570	Transistor, 2SA1586-Y	D608	23316616	Diode, Zener, MA8220-M, TX
QZ18	23314993	Transistor, 2SC4081T106Q	D611	23118041	Diode, MA111-(TX)
QZ20	23314993	Transistor, 2SC4081T106Q	D612	23118041	Diode, MA111-(TX)

Location No.	Part No.	Description	Location No.	Part No.	Description
D661	23316570	Diode, Zener, MA8056-L, TX	D964	23118859	Diode, 1SS133
D704	23118859	Diode, 1SS133	D965	23118859	Diode, 1SS133
D705	23118859	Diode, 1SS133	D966	23118859	Diode, 1SS133
D715	23118859	Diode, 1SS133	D967	A7568250	Diode, 1S1834
D721	23118859	Diode, 1SS133	D7701	23118041	Diode, MA111-(TX)
D761	23118859	Diode, 1SS133	D7702	23118859	Diode, 1SS133
D762	23118859	Diode, 1SS133	D7705	23118041	Diode, MA111-(TX)
D763	23118859	Diode, 1SS133	D7706	23118041	Diode, MA111-(TX)
D764	23118859	Diode, 1SS133	D7707	23118041	Diode, MA111-(TX)
D781	23118859	Diode, 1SS133	D7708	23118041	Diode, MA111-(TX)
D782	23118859	Diode, 1SS133	D7709	23316675	Diode, Zener, MTZJ6.2B
D783	23118859	Diode, 1SS133	D7714	23118041	Diode, MA111-(TX)
D784	23118859	Diode, 1SS133	D7715	23118041	Diode, MA111-(TX)
D801	23316787	Diode, D15XB60H, F5	D7716	23118041	Diode, MA111-(TX)
D811	23316688	Diode, Zener, MTZJ9.1C	D7717	23316675	Diode, Zener, MTZJ6.2B
D813	23316665	Diode, Zener, MTZJ4.7A	D7718	23316675	Diode, Zener, MTZJ6.2B
D822	23316672	Diode, Zener, MTZJ5.6B	D7719	23316675	Diode, Zener, MTZJ6.2B
D823	23316672	Diode, Zener, MTZJ5.6B	D7730	23118538	Diode, Zener, RD6.2ESA B2
D830	23115532	Diode, ERB12-01E	D7736	23118538	Diode, Zener, RD6.2ESA B2
D831	23115532	Diode, ERB12-01E	D7738	23118859	Diode, 1SS133
D840	23316962	Diode, S1WBA20 4101	D7739	23118859	Diode, 1SS133
D841	23316745	Diode, Zener, MTZJ27A	D7740	23118859	Diode, 1SS133
D843	23118859	Diode, 1SS133	D7741	23118859	Diode, 1SS133
D844	23316688	Diode, Zener, MTZJ9.1C	D7742	23118859	Diode, 1SS133
D845	23316679	Diode, Zener, MTZJ6.8C	D7743	23118859	Diode, 1SS133
D846	23118859	Diode, 1SS133	D7745	23118859	Diode, 1SS133
D851	23357215	Diode, D4SBS6	D7746	23118859	Diode, 1SS133
D858	23118859	Diode, 1SS133	D7747	23118859	Diode, 1SS133
D859	23118859	Diode, 1SS133	D7748	23118859	Diode, 1SS133
D862	23118057	Diode, AG01A	D7749	23118859	Diode, 1SS133
D863	23316553	Diode, 1SS145	D7760	23118859	Diode, 1SS133
D864	23118060	Diode, AL01Z	D7805	23118041	Diode, MA111-(TX)
D873	23316747	Diode, Zener, MTZJ27C	D7806	23118041	Diode, MA111-(TX)
D875	23316688	Diode, Zener, MTZJ9.1C	DA02	23316574	Diode, Zener, MA8062-M, TX
D876	23316753	Diode, Zener, MTZJ33A	DA11	23118859	Diode, 1SS133
D877	23316747	Diode, Zener, MTZJ27C	DA12	23316669	Diode, Zener, MTZJ5.1B
D878	23316686	Diode, Zener, MTZJ9.1A	DA34	23118041	Diode, MA111-(TX)
D884	23357217	Diode, D4SBL40	DA43	23118041	Diode, MA111-(TX)
D885	23357216	Diode, D4SBL20U	DA44	23118041	Diode, MA111-(TX)
D891	23357214	Diode, D4SBS4	DA45	23118041	Diode, MA111-(TX)
D892	23316768	Diode, FMB-26L	DA46	23118041	Diode, MA111-(TX)
D899	24000948	Varistor, TNR15G391K	DB10	23316574	Diode, Zener, MA8062-M, TX
D901	23118859	Diode, 1SS133	DB11	23118041	Diode, MA111-(TX)
D902	23118859	Diode, 1SS133	DB11	23358501	Diode (LED), SCL003URC5F
D911	23118859	Diode, 1SS133	DB12	23118041	Diode, MA111-(TX)
D912	23118859	Diode, 1SS133	DB13	23118041	Diode, MA111-(TX)
D916	A7568250	Diode, 1S1834	DB13	23358522	Diode (LED), SIR-56SB3F
D921	23118859	Diode, 1SS133	DB14	23118041	Diode, MA111-(TX)
D922	23118859	Diode, 1SS133	DB14	23118859	Diode, 1SS133
D924	23118859	Diode, 1SS133	DB30	23118859	Diode, 1SS133
D925	23118859	Diode, 1SS133	DB42	23316574	Diode, Zener, MA8062-M, TX
D931	23118859	Diode, 1SS133	DB61	23118041	Diode, MA111-(TX)
D932	23118859	Diode, 1SS133	DH001	23316675	Diode, Zener, MTZJ6.2B
D933	23118859	Diode, 1SS133	DH002	23316675	Diode, Zener, MTZJ6.2B
D934	23118859	Diode, 1SS133	DH003	23316675	Diode, Zener, MTZJ6.2B
D936	A7568250	Diode, 1S1834	DV01	23316686	Diode, Zener, MTZJ9.1A
D941	23118859	Diode, 1SS133	DV02	23316686	Diode, Zener, MTZJ9.1A
D942	23118859	Diode, 1SS133	DV03	23316686	Diode, Zener, MTZJ9.1A
D943	23118859	Diode, 1SS133	DV07	23316686	Diode, Zener, MTZJ9.1A
D946	23118859	Diode, 1SS133	DV08	23316686	Diode, Zener, MTZJ9.1A
D948	23118859	Diode, 1SS133	DV09	23316686	Diode, Zener, MTZJ9.1A
D961	23118859	Diode, 1SS133	DV11	23316686	Diode, Zener, MTZJ9.1A
D962	23118859	Diode, 1SS133	DV12	23316686	Diode, Zener, MTZJ9.1A
D963	23118859	Diode, 1SS133	DV13	23316686	Diode, Zener, MTZJ9.1A

Location No.	Part No.	Description	Location No.	Part No.	Description
DV17	23316686	Diode, Zener, MTZJ9.1A	JX207	24000445	Chip Jumper, 1680 Type
DV18	23316686	Diode, Zener, MTZJ9.1A	JX222	24000445	Chip Jumper, 1680 Type
DV25	23118859	Diode, 1SS133	JX226	24000445	Chip Jumper, 1680 Type
DV161	23316686	Diode, Zener, MTZJ9.1A	JX242	24000445	Chip Jumper, 1680 Type
DV162	23316686	Diode, Zener, MTZJ9.1A	JX246	24109103	Chip, 0.01μF, ±10%, 25V
DV163	23316686	Diode, Zener, MTZJ9.1A	JX475	24000445	Chip Jumper, 1680 Type
DX11	23115532	Diode, ERB12-01E	JX811	24000445	Chip Jumper, 1680 Type
DX12	23115532	Diode, ERB12-01E	JX812	24000445	Chip Jumper, 1680 Type
MISCELLANEOUS					
B224	23035412	Screw, BTB 4X12 SZN	JY02	24000445	Chip Jumper, 1680 Type
B225	23035412	Screw, BTB 4X12 SZN	JY19	24000445	Chip Jumper, 1680 Type
B230	23037312	Screw, BTBW 3X12 SZN	JY20	24000445	Chip Jumper, 1680 Type
B233	23035412	Screw, BTB 4X12 SZN	JY22	24000445	Chip Jumper, 1680 Type
B234	23035412	Screw, BTB 4X12 SZN	JY26	24000445	Chip Jumper, 1680 Type
B235	23035310	Screw, BTB 3X8 SZN	JY27	24000445	Chip Jumper, 1680 Type
B236	23035412	Screw, BTB 4X12 SZN	JY29	24000445	Chip Jumper, 1680 Type
BB30	23903022	Socket, 8P	JY201	24000445	Chip Jumper, 1680 Type
BB31	23903022	Socket, 8P	JY301	24000445	Chip Jumper, 1680 Type
BB300	23368627	Plug, 8P	JY504	24000445	Chip Jumper, 1680 Type
E918	23737007	Bolt	JZ01	24000445	Chip Jumper, 1680 Type
E948	23737007	Bolt	JZ02	24000576	Chip Jumper, 3216 type
E978	23737007	Bolt	JZ03	24000445	Chip Jumper, 1680 Type
F470	23144624	Fuse, 2.0A, 125V	KB11	23904946	Remote Sensor, RPM-676CBR-S
F801	23144481	Fuse, 7.0A, 125V	P350	23368634	Plug, 25P
F801A	23165433	Holder, Fuse	P410	23903025	Socket, 25P
F850	23144629	Fuse, 6.3A, 125V	P540	23903040	Socket, 56P
F851	23144629	Fuse, 6.3A, 125V	P601	23902213	Socket, B-B, 10P
F860	23144626	Fuse, 4.0A, 125V	P708	23902655	Socket, B-B, 15P
F889	23144626	Fuse, 4.0A, 125V	P709	23902655	Socket, B-B, 15P
F890	23144625	Fuse, 3.15A, 125V	P713	23164787	Plug, 7P
F891	23144627	Fuse, 5.0A, 125V	P714	23164787	Plug, 7P
G101	24872101	Chip, 100 ohm, 1/16W	P715	23164787	Plug, 7P
G102	24872101	Chip, 100 ohm, 1/16W	P801	23372117	Power Cord
GJ01	24000824	Chip Jumper, 2125Type	PD02	23368130	Plug, 10P
GJ01	24000824	Chip Jumper, 2125Type	PH001	23367724	Plug, B-B,15P
GJ02	24000824	Chip Jumper, 2125Type	PH002	23367724	Plug, B-B,15P
GJ03	24000445	Chip Jumper, 1680 Type	PV04	23365819	Jack, 1S3P
GJ04	24000445	Chip Jumper, 1680 Type	PV04	23365907	Jack, 5P
GJ04	24000824	Chip Jumper, 2125Type	PV06	23903040	Socket, 56P
GJ05	24000445	Chip Jumper, 1680 Type	S602	23145412	Switch, Slide, 2C2P
GJ05	24000824	Chip Jumper, 2125Type	SA11	23145226	Switch, Push, 1C1P
GJ05	24000824	Chip Jumper, 2125Type	SA12	23145226	Switch, Push, 1C1P
GJ05	24000824	Chip Jumper, 2125Type	SA13	23145226	Switch, Push, 1C1P
GJ06	24000445	Chip Jumper, 1680 Type	SA14	23145226	Switch, Push, 1C1P
GJ06	24000824	Chip Jumper, 2125Type	SA15	23145226	Switch, Push, 1C1P
GJ07	24000824	Chip Jumper, 2125Type	SA16	23145226	Switch, Push, 1C1P
GJ10	24000824	Chip Jumper, 2125Type	SA17	23145226	Switch, Push, 1C1P
GJ11	24000824	Chip Jumper, 2125Type	SA18	23145226	Switch, Push, 1C1P
GJ14	24000824	Chip Jumper, 2125Type	SR41	23146558	Relay, DC12V
GJ15	24000824	Chip Jumper, 2125Type	SR42	23146570	Relay, DC12V
GJ16	24000445	Chip Jumper, 1680 Type	SR81	23146574	Relay, DLS5D1-O(M) 0.15W
GJ25	24000445	Chip Jumper, 1680 Type	SR82	23146574	Relay, DLS5D1-O(M) 0.15W
GJ501	24000445	Chip Jumper, 1680 Type	V901A	23902019	Socket, CRT, 9P
H003	23344422	RF Switch, RSU134X1	V902A	23902019	Socket, CRT, 9P
H003A	23740989	Nut, F-Connector	V903A	23902019	Socket, CRT, 9P
J501	24000824	Chip Jumper, 2125Type	W661	23351131	Speaker, SPK-1390, 120X120mm, 16 ohm
JM03	24000445	Chip Jumper, 1680 Type	W662	23351131	Speaker, SPK-1390, 120X120mm, 16 ohm
JM04	24000445	Chip Jumper, 1680 Type	X401	23153721	Ceramic Resonator, 503kHz, TCR1023
JM06	24000445	Chip Jumper, 1680 Type	X501	23153961	Crystal, 3.58MHz
JM07	24000445	Chip Jumper, 1680 Type	X4401	23153721	Ceramic Resonator, 503kHz, TCR1023
JR02	24000445	Chip Jumper, 1680 Type			
JV504	24000445	Chip Jumper, 1680 Type			
JX101	24000445	Chip Jumper, 1680 Type			
JX206	24000445	Chip Jumper, 1680 Type			


Location No.	Part No.	Description	Location No.	Part No.	Description
X4402	23153721	Ceramic Resonator, 503kHz, TCR1023			
XA01	23153533	Ceramic Resonator, 8.00MHz, TCR1082AM			
XB01	23153011	Ceramic Resonator, 4.00MHz, TCR1050			
XM01	23153529	Crystal, 20 MHz			
XY01	23153961	Crystal, 3.58MHz			
XY03	23153721	Ceramic Resonator, 503kHz, TCR1023			
Z401	24082996	CR Block, TPA5007BH			
Z405	23140203	SG-GAP, SG99B3EN			
Z410	23110842	Focus Pack, TPA6031			
Z410A	23505177	Focus Cable			
Z450A	23504953	Anode Cable			
△Z801	23148734	Module, HIC1026A, PROTECTOR, HIC1026			
ZA01	23262286	Coil, IF, TRF1237AH			
ZH001	23103823	Filter, TEM2027D			
ZH002	23103823	Filter, TEM2027D			
ZH121	23103823	Filter, TEM2027D			
ZH122	23103823	Filter, TEM2027D			
ZH141	23103823	Filter, TEM2027D			
ZH142	23103823	Filter, TEM2027D			
ZH161	23103823	Filter, TEM2027D			
ZH162	23103823	Filter, TEM2027D			
ZT01	70108925	Resonator, 4MHz, TCR1071			
ZX110	23103823	Filter, TEM2027D			
ZX190	23103823	Filter, TEM2027D			
ZX221	23103823	Filter, TEM2027D			
ZX241	23103823	Filter, TEM2027D			
ZX521	23103823	Filter, TEM2027D			
ZX531	23103823	Filter, TEM2027D			
ZX541	23103823	Filter, TEM2027D			
ZX821	23246199	Chip (Ferrite Bead), TRF42R2CG			
ZX822	23246195	Chip (Ferrite Bead), TRF41R0CG			
ZX823	23246195	Chip (Ferrite Bead), TRF41R0CG			
ZY300	23103823	Filter, TEM2027D			
ZY330	23103823	Filter, TEM2027D			
ZY340	23103823	Filter, TEM2027D			
PC BOARD ASSEMBLIES					
* E031Z	23785268	CRT-D/R Board, PB9586B1			
* E032Z	23785269	CRT-D/G Board, PB9586B2			
* E033Z	23785270	CRT-D/B Board, PB9586B3			
* E034Z	23785271	SVM-R Board, PB9586B4			
* E035Z	23785272	SVM-G Board, PB9586B5			
* E036Z	23785273	SVM-B Board, PB9586B6			
* E041Z	23785284	FRONT-CON Board, PB9651-1			
* E042Z	23785285	FRONT-IN Board, PB9651-2			
* E043Z	23785286	REM Board, PB9651-3			
* U401	23785170	DPC Board, PB9602			
* U701	23785277	DIGI-CONV Board, PB9585D			
* U801	23785276	DEF/Power Board, PB9582C			
* U901	23785275	Signal/CONV Board, PB9581F (43H70)			
* U901	23785586	Signal/CONV Board, PB9581K (43HX70)			
* UD01	23785130	SRS Board, PB9587			
* UV01	23785120	A/V Board, PB9583A			
* UZ01	23785121	HYPER PRO. Board, PB9584A			
PICTURE TUBE					
△ V901R	23005446	Protector Coupling R			
△ V902G	23005447	Protector Coupling G			
△ V903B	23005803	Protector Coupling B			
TUNER					
H001	23321389	Tuner, EL956LW			
HY01	23321369	Tuner, EL953L			
ACCESSORIES					
K912	23306269	Remote Hand Unit, CT-9954 (43H70)			
K912	23306370	Remote Hand Unit, CT-90047 (43HX70)			
AT03	23588181	Battery Cover			
Y101	23563966	Owner's Manual, English, 43HX70			
Y101	23565018	Owner's Manual, English, 43H70			
Y101F	23563967	Owner's Manual, French, 43HX70			
Y101F	23565019	Owner's Manual, French, 43H70			
CABINET PARTS					
A101	23465852	Cabinet, Bottom			
A102	23519892	Speaker Box R (43H70)			
A102	23527147	Speaker Box R (43HX70)			
A103	23519893	Speaker Box L (43H70)			
A103	23527148	Speaker Box L (43HX70)			
A201	23510392	Bezel (43H70)			
A201	23540142	Bezel (43HX70)			
A202	23450289	Control Panel (43H70)			
A202	23450291	Control Panel (43HX70)			
A251	23427384	Door (43H70)			
A251	23427844	Door (43HX70)			
A254	23445157	Knob, Power (43H70)			
A254	23445424	Knob, Power (43HX70)			
A257	23836492	Spring, Coil			
A258	23451976	Push, Catch			
A420	23427355	Back Cover			
A423	23421848	Piece, Back Cover			
A424	23540128	Back Bord Cover			
A505	72471068	Screw, BIDT2 4X12BZ			
A510	23030815	Screw, PTD #6 X 3/4			
A521	23030815	Screw, PTD #6 X 3/4			
A533	23030815	Screw, PTD #6 X 3/4			
A535	23030815	Screw, PTD #6 X 3/4			
A539	23030815	Screw, PTD #6 X 3/4			
A541	23030815	Screw, PTD #6 X 3/4			
A543	72471068	Screw, BIDT2 4X12BZ			
A544	23030815	Screw, PTD #6 X 3/4			
A701	23525619	Case (43H70)			
A701	23525654	Case (43HX70)			
A703	23935778	Packing, Top			
A707	23935780	Bottom Tray			
A721	23943628	Cover, Poly			
K111	23430512	Delta, DELTA67-A/B			
K112	23430512	Delta, DELTA67-A/B			
K113	23430512	Delta, DELTA67-A/B			
K501	23430786	Lenti Sheet, SCREEN43KK-L			

Location No.	Part No.	Description
K502	23837526	Fresnel Sheet, SCREEN43DH-F
K503	23430776	Contrast Screen, CONT-SCR43DK (43H70)
K503	23430602	Contrast Screen, SCR-PRO43AJ (43HX70)
K601	23430601	Mirror, MIRROR43J

**THIS PAGE IS
INTENTIONALLY LEFT
BLANK.**


SIGNAL/CONV BOARD PB9581

BOTTOM (FOIL) SIDE

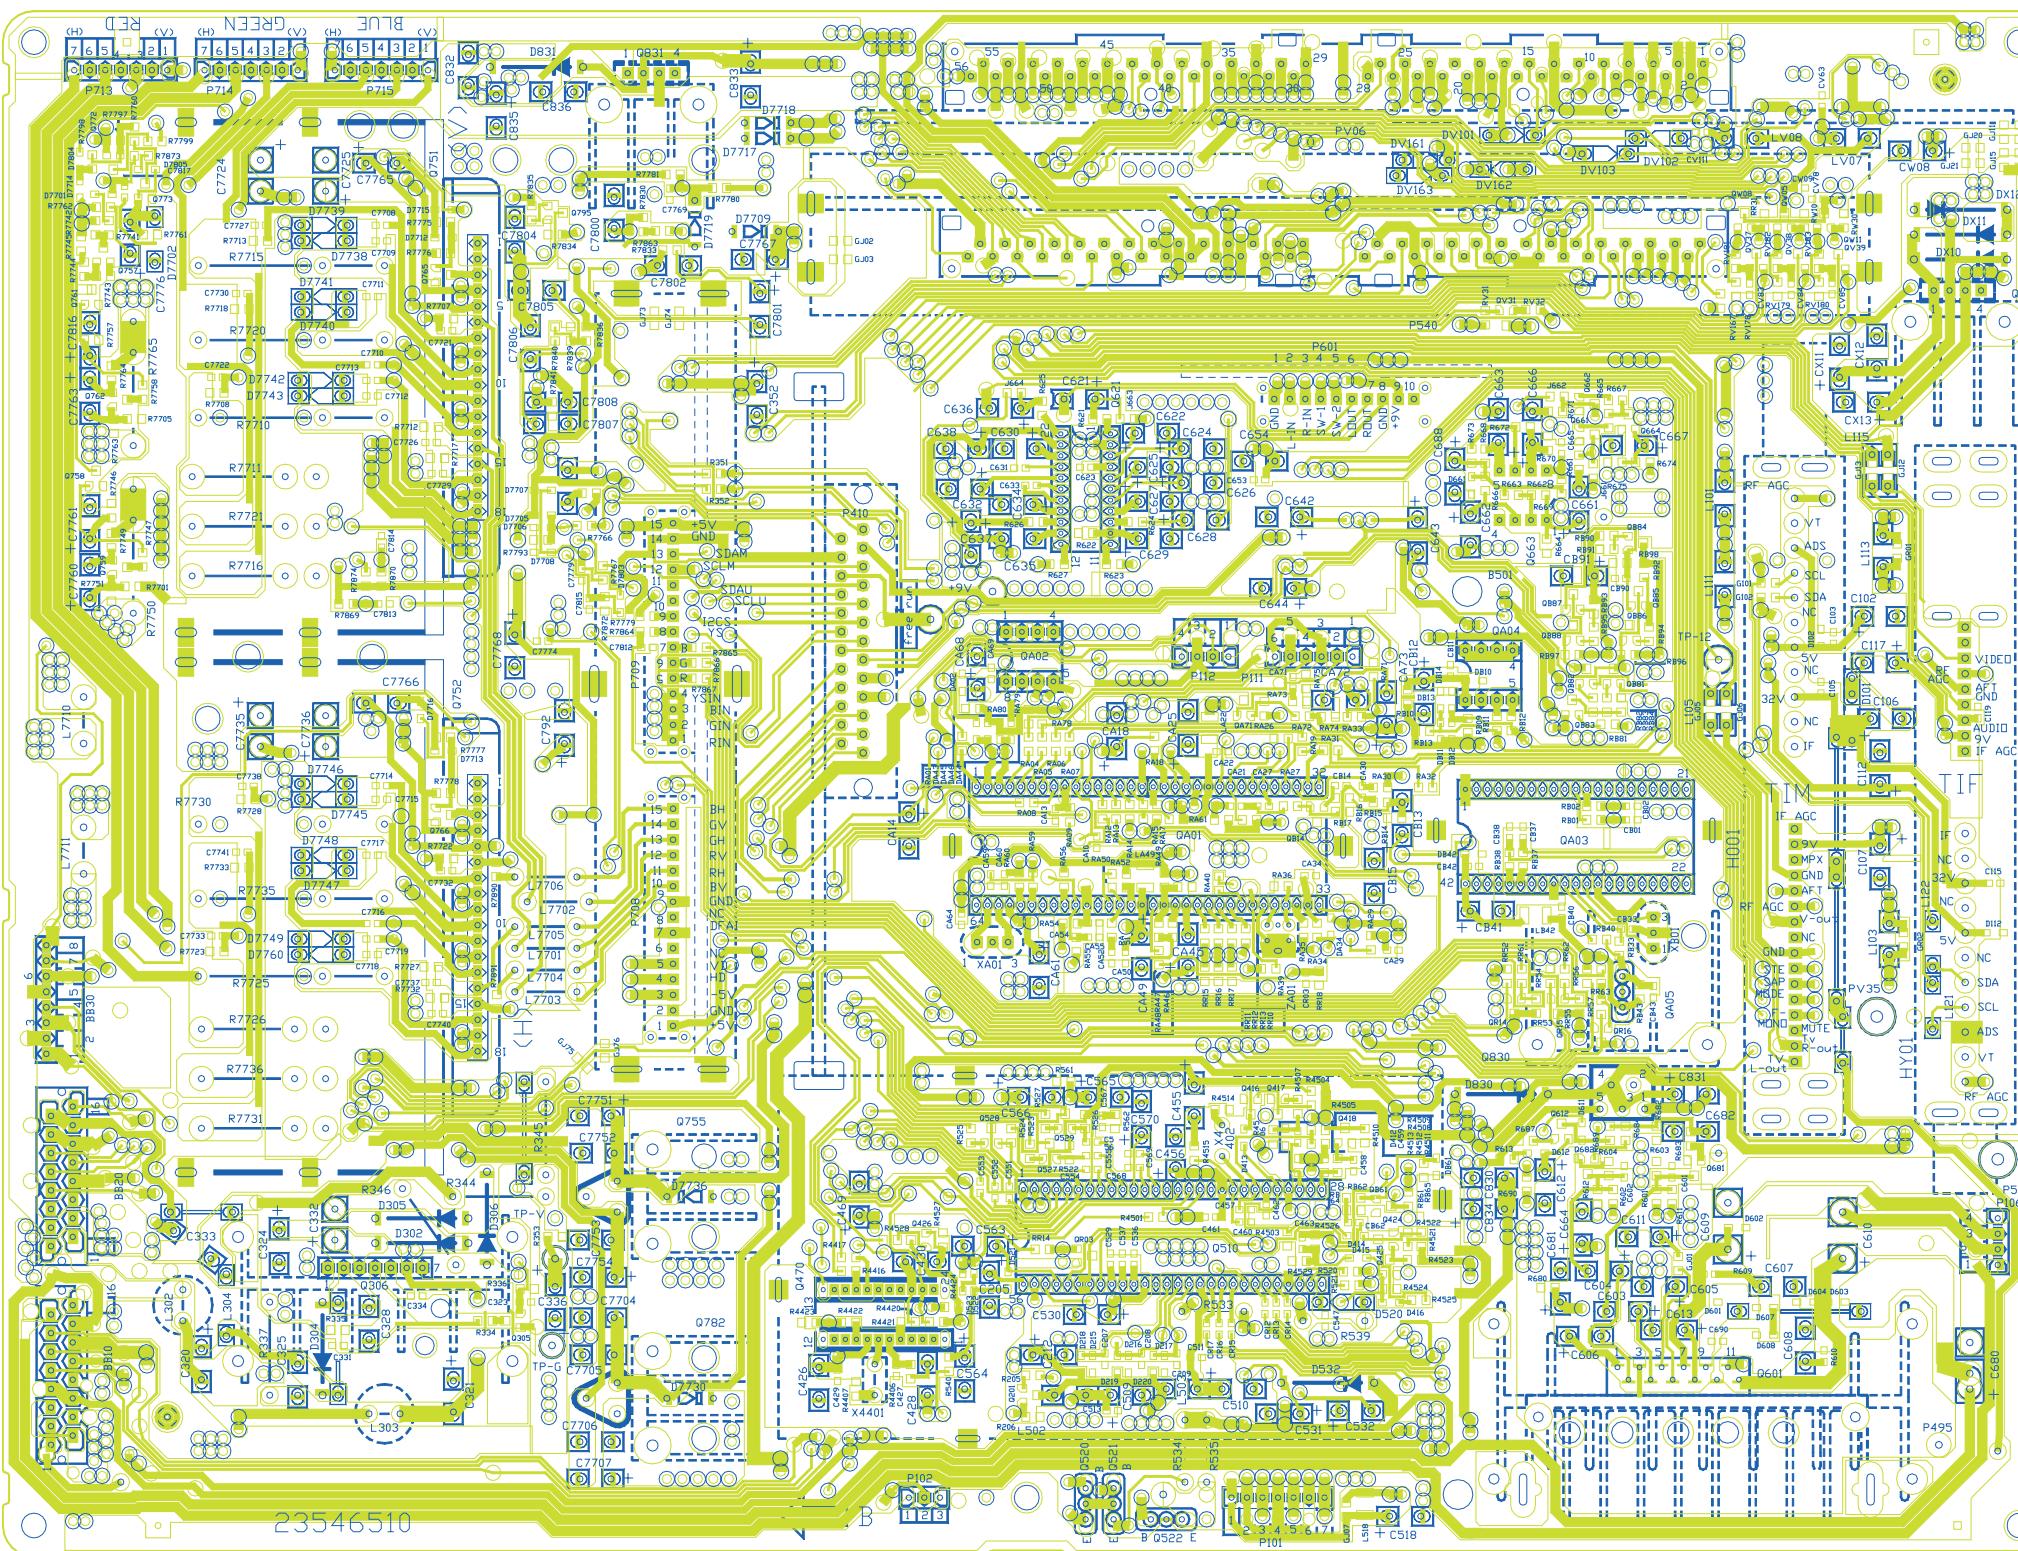


DEF/POWER BOARD PB9582C

BOTTOM (FOIL) SIDE

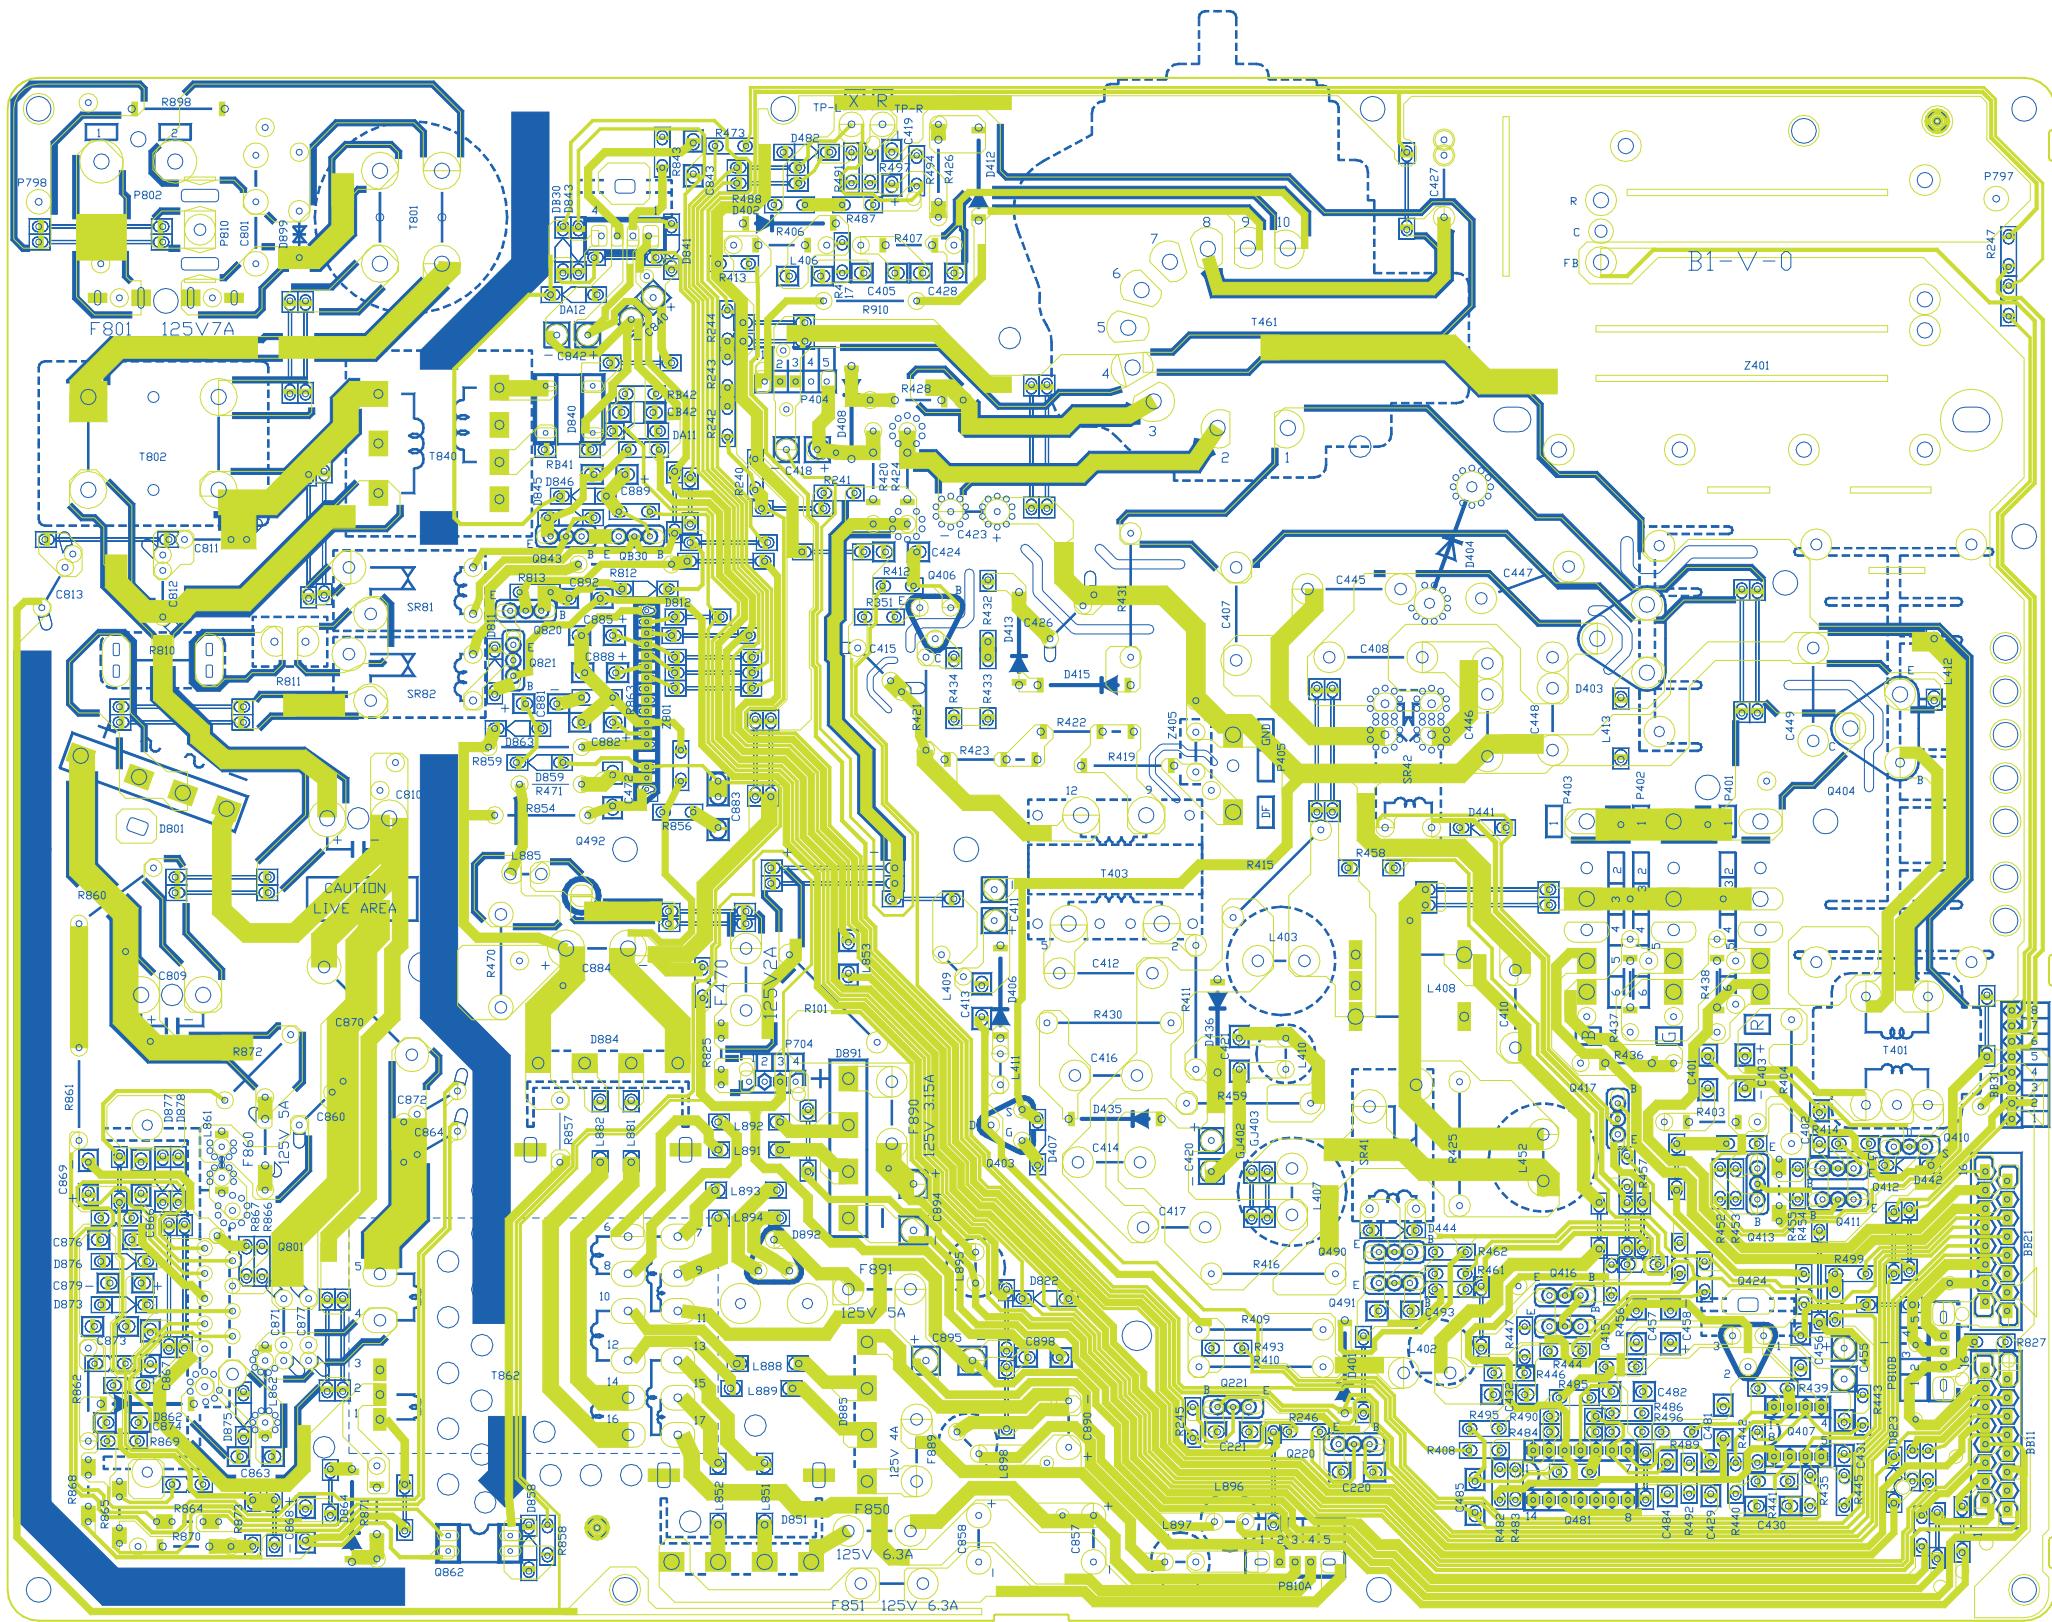


A/V BOARD PB9583A

BOTTOM (FOIL) SIDE

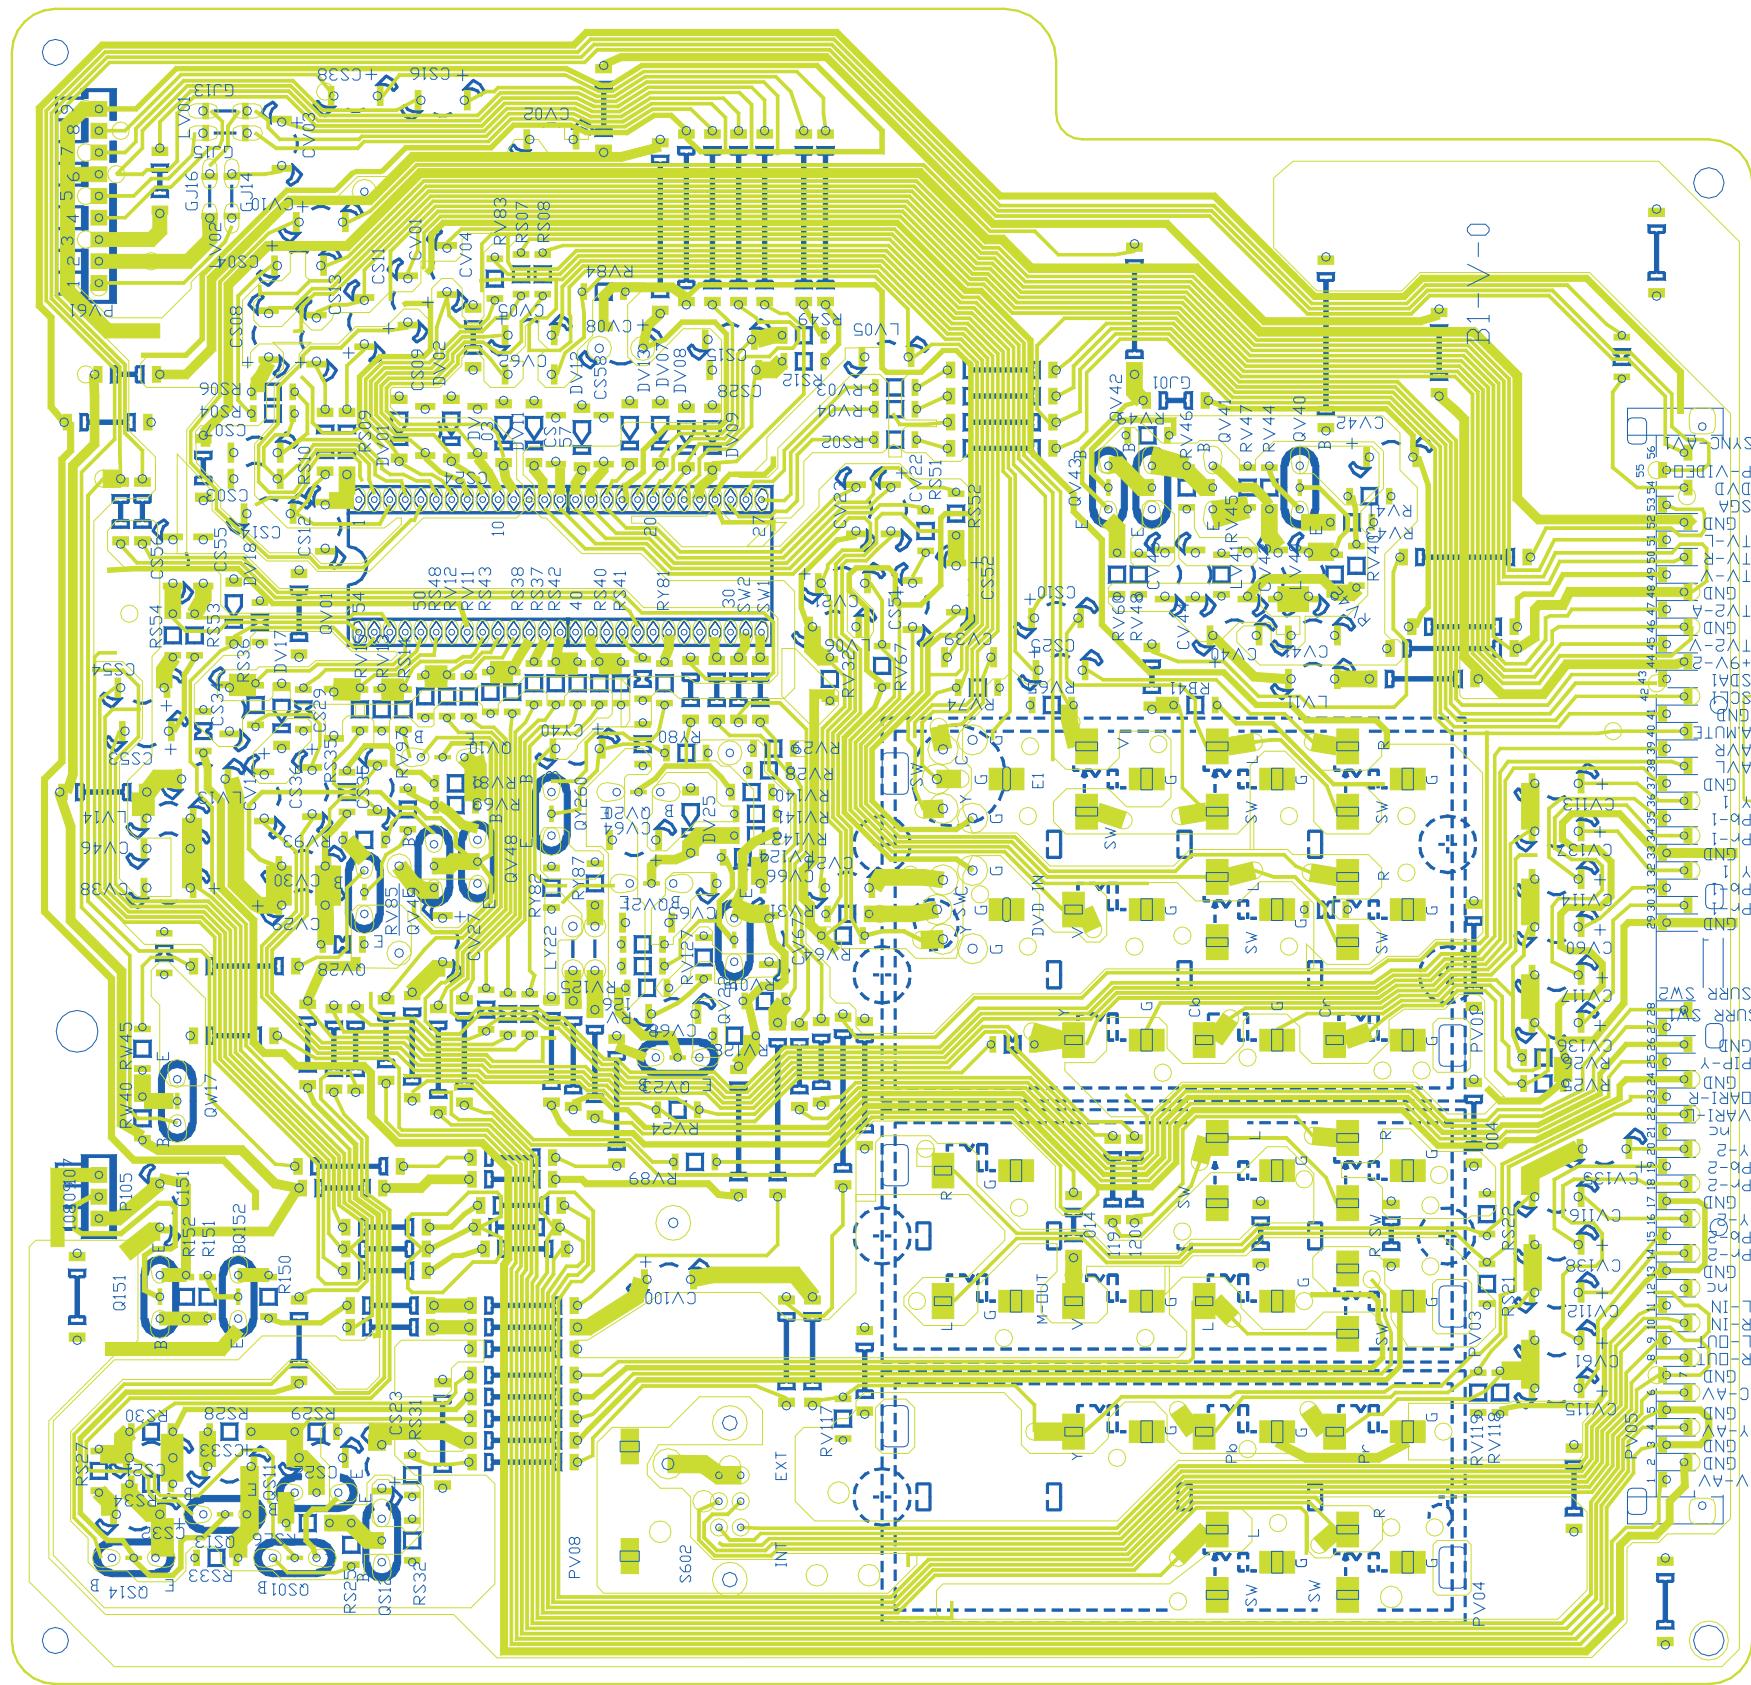


HYPER PRO BOARD PB9584A

BOTTOM (FOIL) SIDE

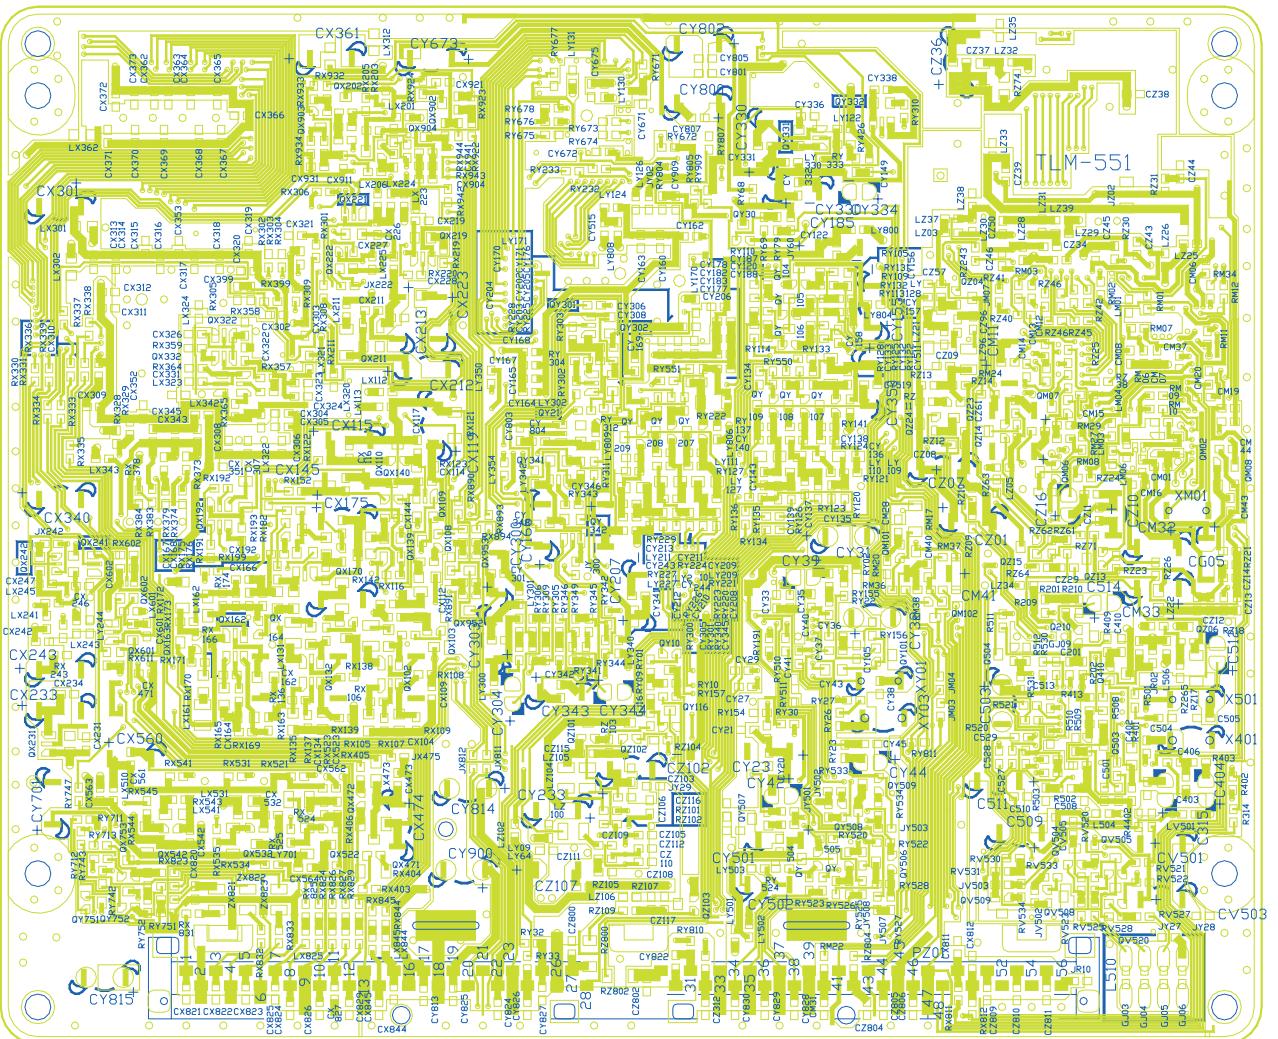


DPC BOARD PB9602
BOTTOM (FOIL) SIDE

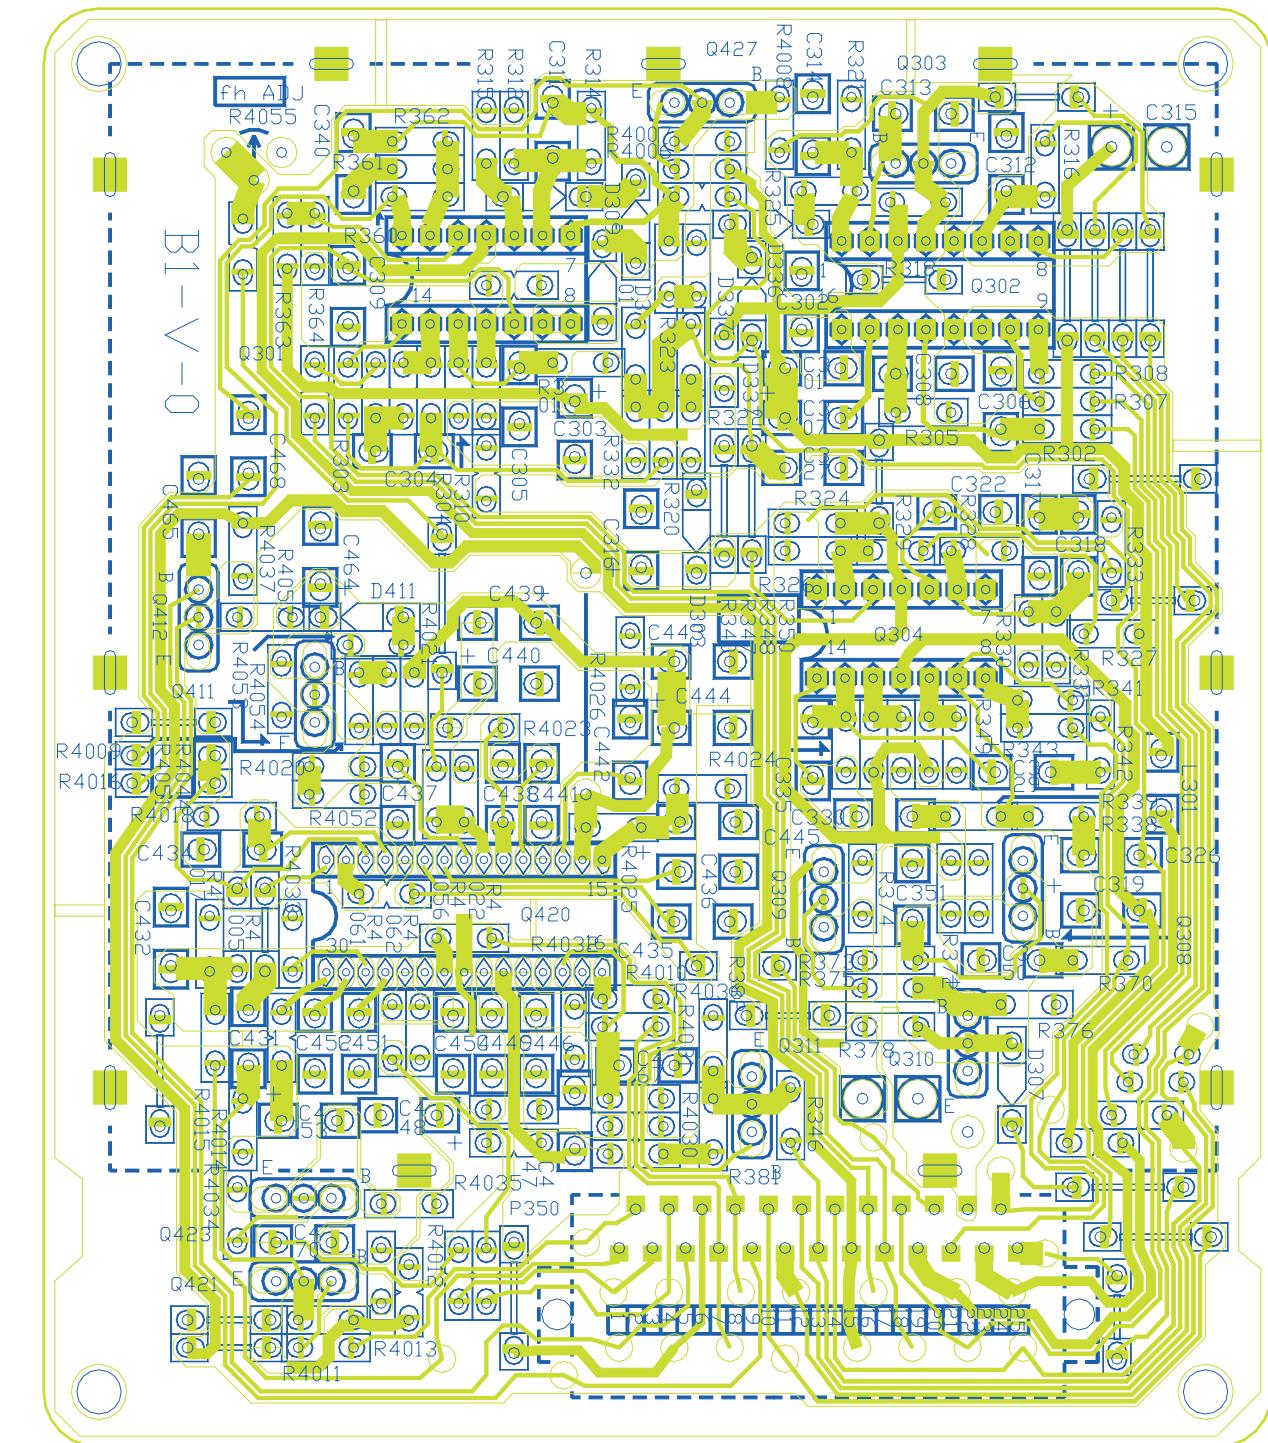


CRT/D-RED BOARD PB9586ZA-1

BOTTOM (FOIL) SIDE

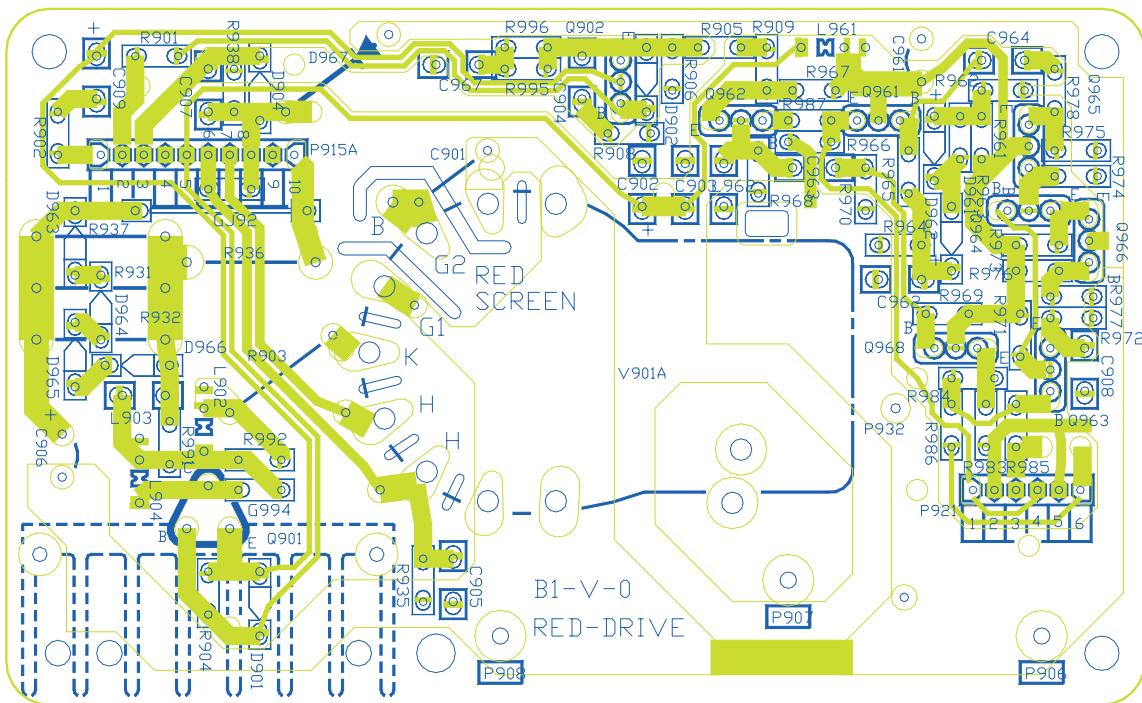


CRT/D-GRN BOARD PB9586ZA-2

BOTTOM (FOIL) SIDE

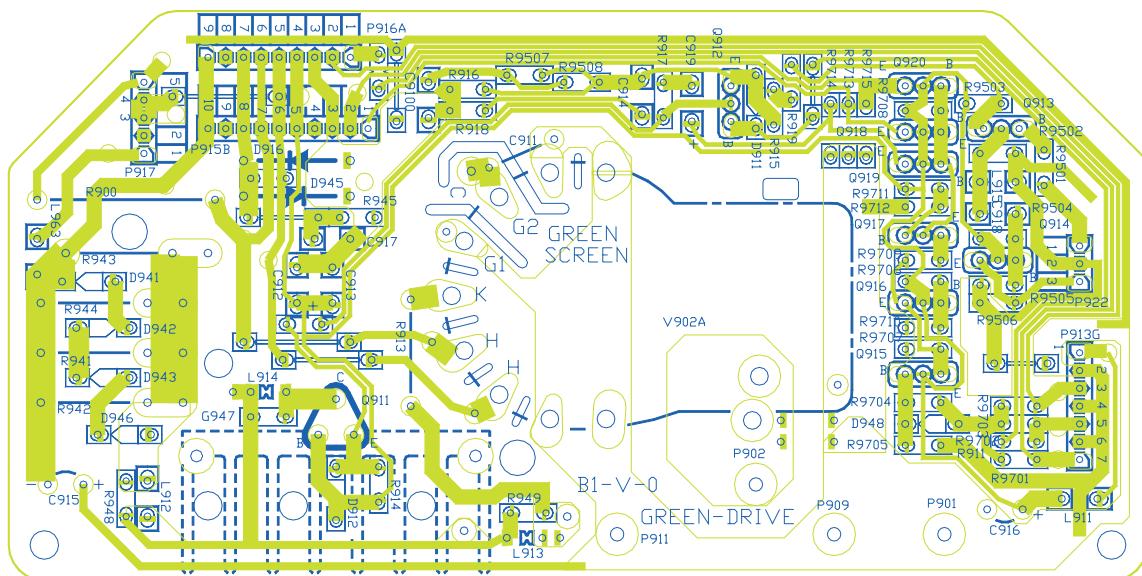


CRT/D-BLU BOARD PB9586ZA-3

BOTTOM (FOIL) SIDE

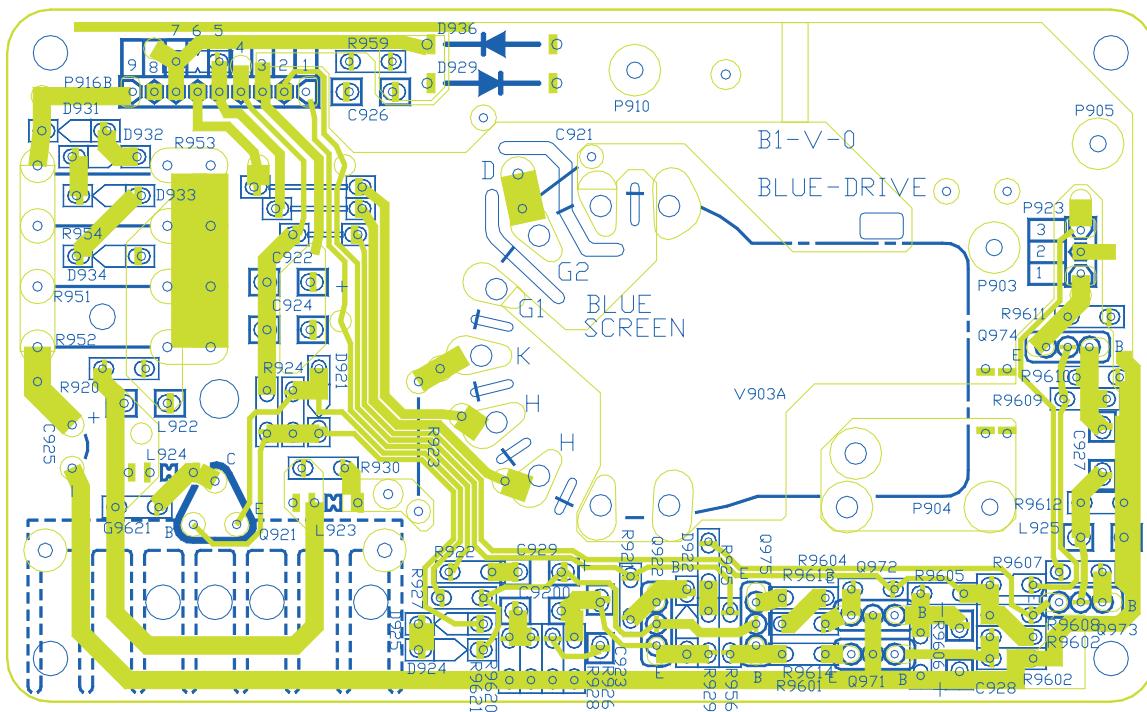


D-COVER BOARD PB9585D


BOTTOM (FOIL) SIDE

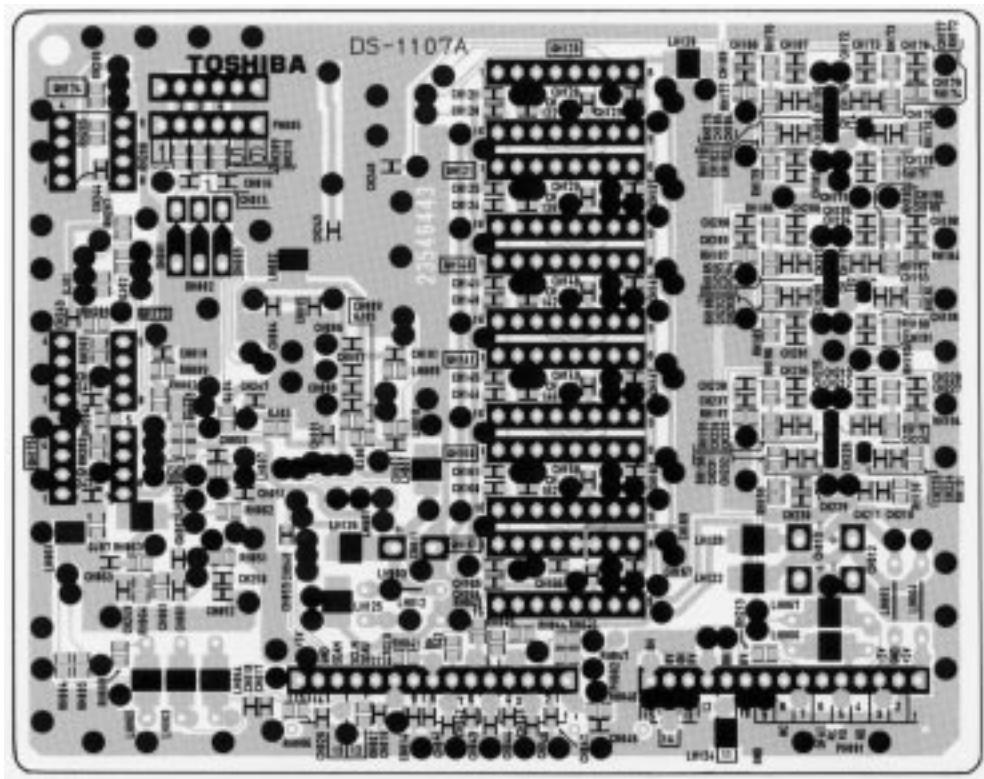


SVM-R BOARD PB9586ZA-4
BOTTOM (FOIL) SIDE

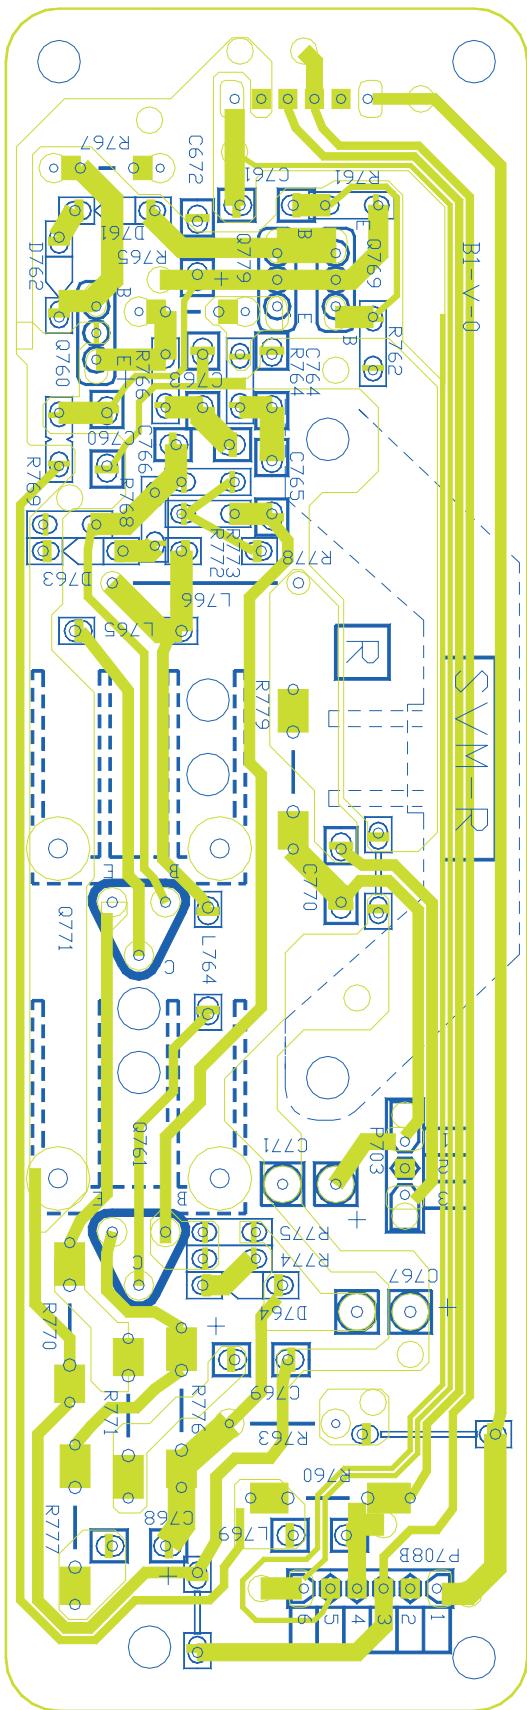


SVM-G BOARD PB9586ZA-5
BOTTOM (FOIL) SIDE

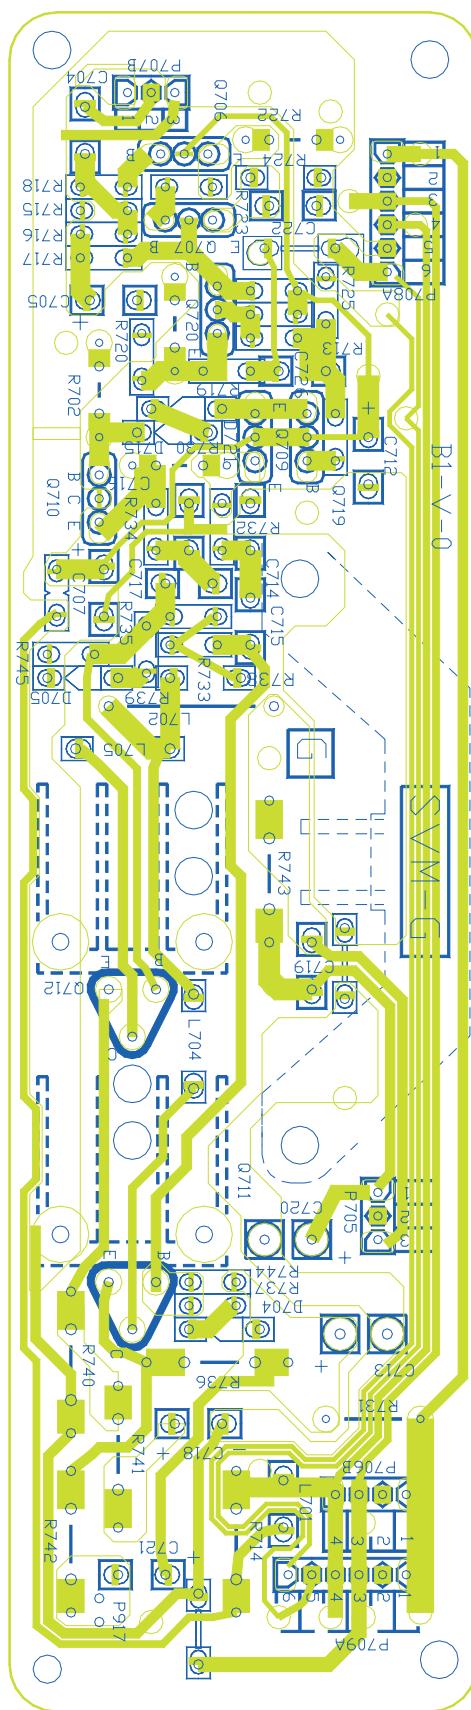

SVM-B BOARD PB9586ZA-6
BOTTOM (FOIL) SIDE

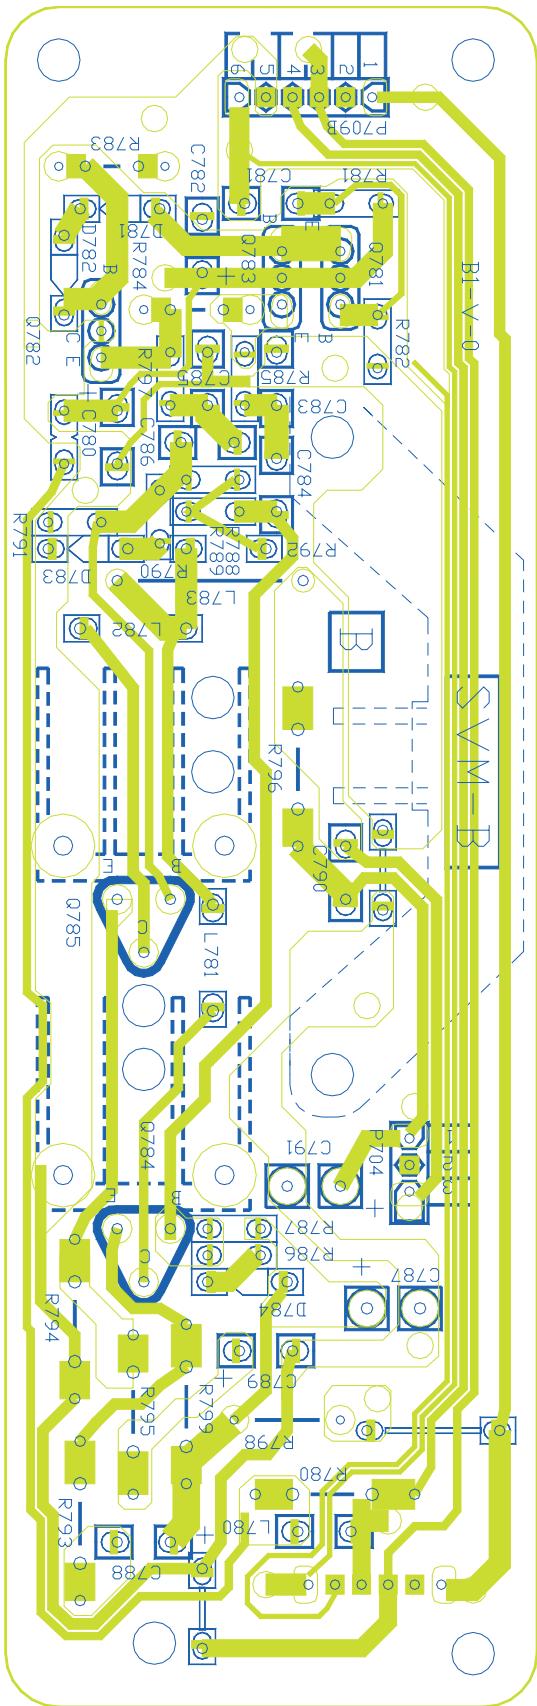


SRS BOARD PB9587
BOTTOM (FOIL) SIDE

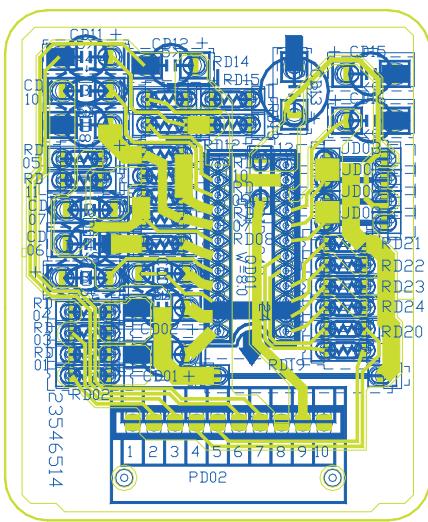


FRONT BOARD PB9651

BOTTOM (FOIL) SIDE

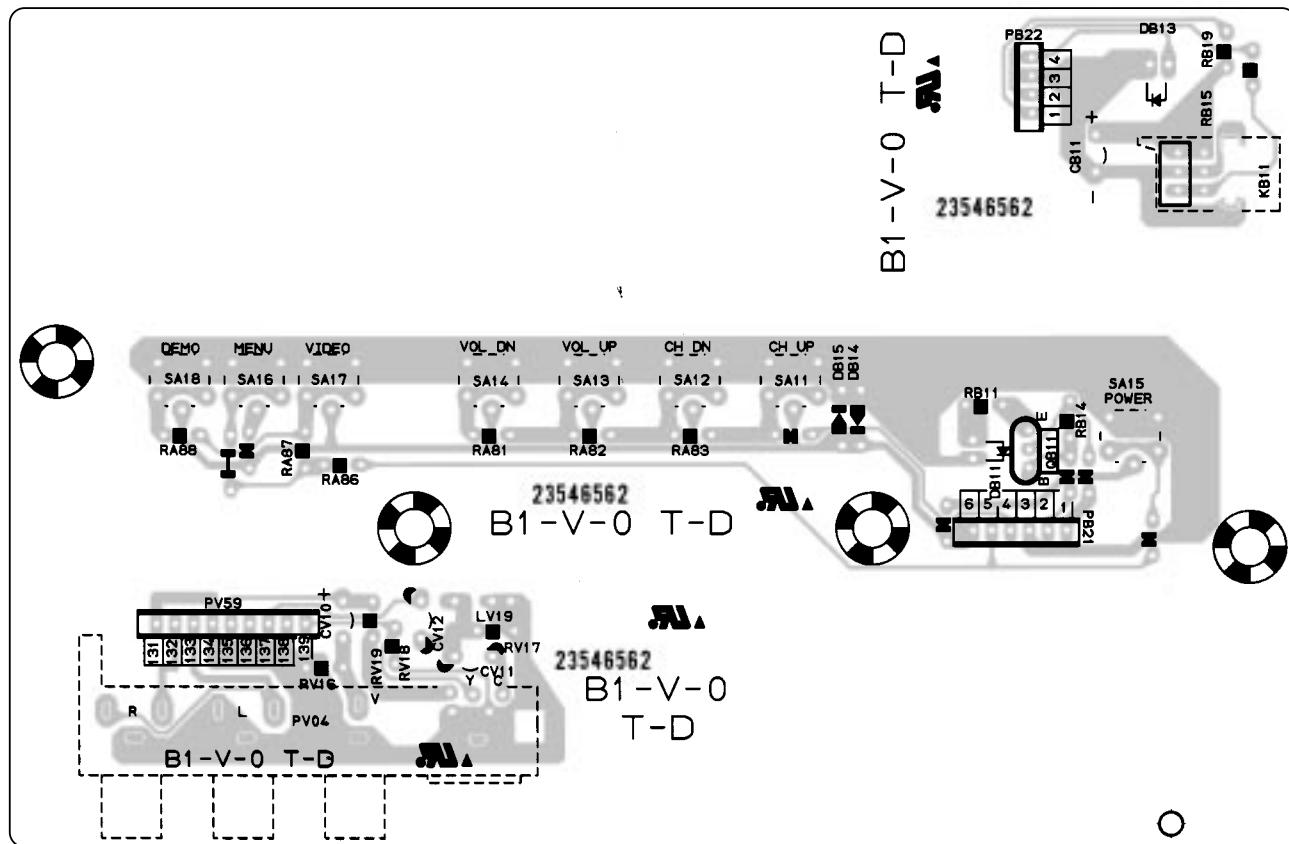


TERMINAL VIEW OF TRANSISTORS


① 2SC5144




② 2SC3852
2SD1763A
2SC1569
2SC4544
2SA1788
2SA1306
2SA1186A




③ 2SC752GTM
2SC2482
2SC2655
2SC4721P




④ 2SC752
2SA562TM
2SA1015
2SC1815
2SC2878
2SC1740S
2SC2120
2SA9335




⑤ 2SA1788




⑥ RN2203
RN2201
RN2004
RN1203
RN1204
RN2204
RN1205
RN1202
RN1201



⑦ 2SD1554
2SD2253
2SD1556
2SD2553
2SC5143



⑧ ON4409



— MEMO —

MEMO

SPECIFICATIONS (Representative: 43HX70)						
TELEVISION SYSTEM	NTSC standard					
CHANNEL COVERAGE	VHF: 2 through 13 UHF: 14 through 69 Cable TV: Mid band (A-8 through A-1, A through I) Super band (J through W) Hyper band (AA through ZZ, AAA, BBB) Ultra band (65 through 94, 100 through 125)					
POWER SOURCE	120 V AC, 60 Hz					
POWER CONSUMPTION	195W (Average)					
AUDIO POWER	14 W + 14 W					
SPEAKER TYPE	Two 4-3/4 inches (12 cm) round					
VIDEO/AUDIO TERMINALS	S-VIDEO INPUT Y-INPUT: 1V (p-p), 75 ohm, negative sync. C-INPUT: 0.286 V(p-p) (burst signal), 75 ohm VIDEO/AUDIO INPUT VIDEO: 1 V(p-p), 75 ohm, negative sync. AUDIO: 150 mV(rms) (30% modulation equivalent, 47 kohm) ColorStream™ (Component video) INPUT Y-INPUT: 1 V(p-p), 75 ohm P _R -INPUT: 0.7 V(p-p), 75 ohm P _B -INPUT: 0.7 V(p-p), 75 ohm AUDIO: 150mV(rms). 47 kohm VIDEO/AUDIO OUTPUT VIDEO: 1 V(p-p), 75 ohm, negative sync. AUDIO: 150 mV(rms) (30% modulation equivalent, 4.7 kohm) VARIABLE AUDIO OUTPUT 0-300 mV(rms) (30% modulation equivalent, 4.7 kohm) AUDIO CENTER CHANNEL INPUT 300 mV(rms) (30% modulation equivalent, 10 kohm)					
DIMENSIONS/MASS	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center; padding: 2px;">Dimension (W/H/D)</th><th style="text-align: center; padding: 2px;">Mass</th></tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 2px;">43HX70 37-3/4 x 42-1/2 x 18-7/16 inches (959 x 1080 x 468 mm)</td><td style="text-align: center; padding: 2px;">133 lbs (60.5 kg)</td></tr> </tbody> </table>		Dimension (W/H/D)	Mass	43HX70 37-3/4 x 42-1/2 x 18-7/16 inches (959 x 1080 x 468 mm)	133 lbs (60.5 kg)
Dimension (W/H/D)	Mass					
43HX70 37-3/4 x 42-1/2 x 18-7/16 inches (959 x 1080 x 468 mm)	133 lbs (60.5 kg)					
SUPPLIED ACCESSORIES	Remote Control with 2 size "AA" alkaline batteries					

*Please refer to owner's manual in detail.

TOSHIBA CORPORATION
1-1, SHIBAURA 1-CHOME, MINATO-KU, TOKYO 105-8001, JAPAN