


8 Amp Schottky Rectifier

HSM825 - HSM845


C

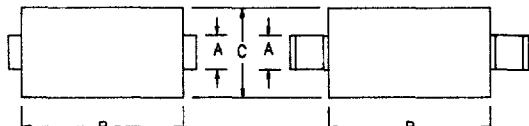

D0214AB

D0215AB

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.117	.123	2.21	2.97	
B	.260	.280	4.57	6.60	
C	.220	.245	3.94	5.58	
D	.307	.322	5.59	7.80	
E	.075	.095	1.90	2.41	
F	.380	.400	6.86	7.37	
G	.025	.040	.381	.762	
H	.030	.060	.760	1.52	

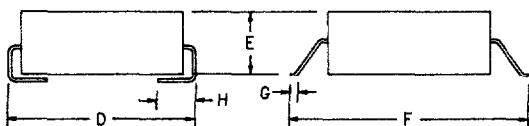

Microsemi
Catalog Number

Working Peak
Reverse Voltage

Repetitive Peak
Reverse Voltage

HSM825*	25V	25V
HSM830*	30V	30V
HSM835*	35V	35V
HSM840*	40V	40V
HSM845*	45V	45V

*Add Suffix J For J Lead or G For Gull Wing Lead Configuration

- Schottky Barrier Rectifier
- Guard Ring Protection
- 175°C Junction Temperature
- High Current Capability
- V_{RRM} 25 to 45 Volts

Electrical Characteristics

Average forward current	I _{F(AV)} 8.0 Amps	Square wave
Maximum surge current	I _{F(AV)} 400 Amps	8.3ms, half sine, T _J = 175°C
Max peak forward voltage	V _{FM} .47 Volts	I _{FM} = 8.0A; T _J = 150°C *
Max peak forward voltage	V _{FM} .62 Volts	I _{FM} = 8.0A; T _J = 25°C *
Max peak reverse current	I _{RM} 250 μA	V _{RRM} ; T _J = 25°C
Typical junction capacitance	C _J 660pF	V _R = 5.0V, T _J = 25°C

* Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range
Operating junction temp range
Weight

T_{STC}
T_J

-40°C to 175°C
-40°C to 175°C
.008 ounces (.22 grams) typical

HSM825 - HSM845

Figure 1
Typical Forward Characteristic

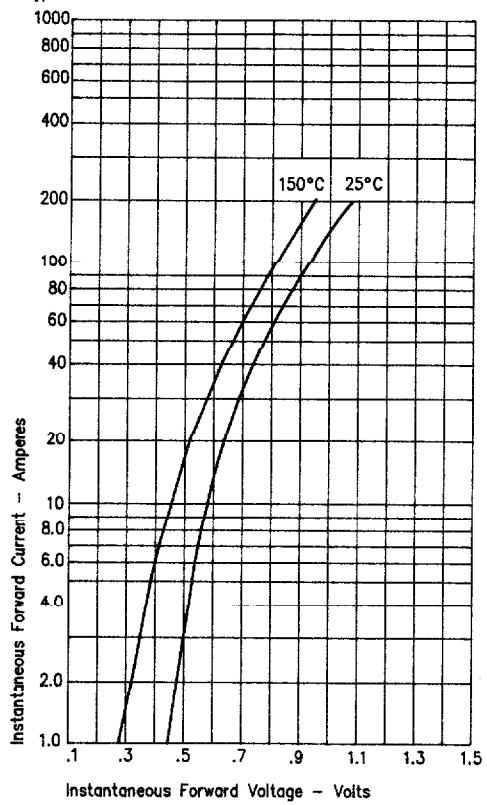


Figure 3
Typical Junction Capacitance

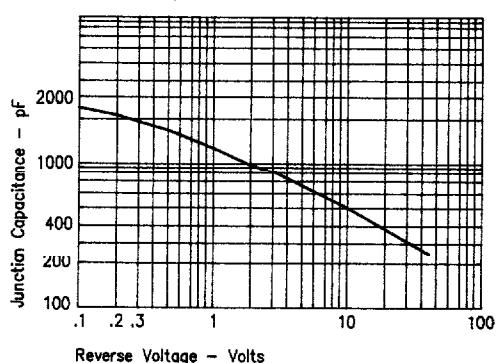


Figure 2
Typical Reverse Characteristics

