
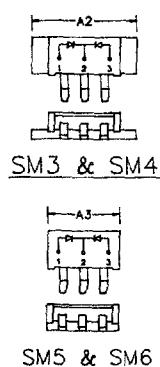


# Schottky Power Surface Mount FST81SM1-SM6 Series

C

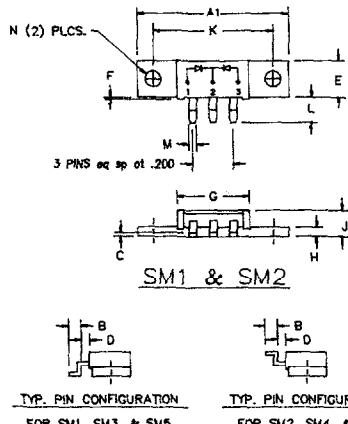

Dim.	Inches		Millimeter	
	Minimum	Maximum	Minimum	Maximum
A1	1.190	1.510	37.85	38.35
A2	1.020	1.040	26.12	26.42
A3	.695	.715	17.65	18.16
B	.110	.120	2.79	3.04
C	.027	.037	0.69	0.94
D	.100	.110	2.54	2.79
E	.350	.370	8.89	9.40
F	.015	.025	0.38	0.64
G	.695	.715	17.65	18.16
H	.088	.098	2.24	2.49
J	.240	.260	6.10	6.60
K	1.180	1.195	29.97	30.35
L	.230	.250	5.84	6.35
M	.065	.085	1.65	2.16
N	.151	.161	3.84	4.09 Dia.

TYP. PIN CONFIGURATION  
FOR SM1, SM3, & SM5

TYP. PIN CONFIGURATION  
FOR SM2, SM4, & SM6

Microsemi Catalog  
Catalog Number

Working Peak  
Reverse Voltage

Repetitive Peak  
Reverse Voltage

FST8130SM ①②  
FST8135SM --  
FST8140SM --  
FST8145SM --

V<sub>RWM</sub>

30V

35V

40V

45V

V<sub>RRM</sub>

30V

35V

40V

45V

- Schottky Barrier Rectifier
- Guard Ring Protection
- Common Cathode Center Tap
- Low Forward Voltage
- 2 X 40 Amperes Avg.
- 150°C Junction Temperature
- Reverse Energy Tested

Note: ① Specify (1-6) to identify package desired  
② Specify C—Common Cathode, A—Common Anode, D—Doubler

## Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 80 Amps	T <sub>C</sub> = 110°C, Square wave, R <sub>BJC</sub> = 0.5°C/W
Average forward current per leg	I <sub>F(AV)</sub> 40 Amps	T <sub>C</sub> = 110°C, Square wave, R <sub>BJC</sub> = 1.0°C/W
Maximum surge current per leg	I <sub>FSM</sub> 800 Amps	8.3 ms, half sine, T <sub>J</sub> = 150°C
Max repetitive peak reverse current per leg	I <sub>R(OV)</sub> 2 Amps	f = 1 KHZ, 25°C, 1 usec square wave
Max peak forward voltage per leg	V <sub>FM</sub> 0.47 volts	I <sub>FM</sub> = 40A; T <sub>J</sub> = 150°C*
Max peak forward voltage per leg	V <sub>FM</sub> 0.53 volts	I <sub>FM</sub> = 40A; T <sub>J</sub> = 25°C*
Max peak reverse current per leg	I <sub>RM</sub> 500 mA	V <sub>RRM</sub> , T <sub>C</sub> = 125°C*
Typical reverse current per leg	I <sub>RM</sub> 1.5 mA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Typical junction capacitance	C <sub>J</sub> 2100 pF	V <sub>R</sub> = 5.0V, T <sub>C</sub> = 25°C

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-40°C to 175°C
Operating junction temp range	T <sub>J</sub>	-40°C to 150°C
Max thermal resistance per leg per package	R <sub>θJC</sub>	1.0°C/W Junction to case
Typical thermal resistance	R <sub>θJC</sub>	0.5°C/W Junction to case
Mounting Base Torque	R <sub>θCS</sub>	0.3°C/W Case to sink
Weight		10 inch pounds maximum
		SM1-2 0.3 ounce (8.4 grams) typical
		SM3-4 0.24 ounce (6.7 grams) typical
		SM5-6 0.18 ounce (5.2 grams) typical

# FST81SM1 – SM6

Figure 1  
Maximum Forward Characteristics – Per Leg

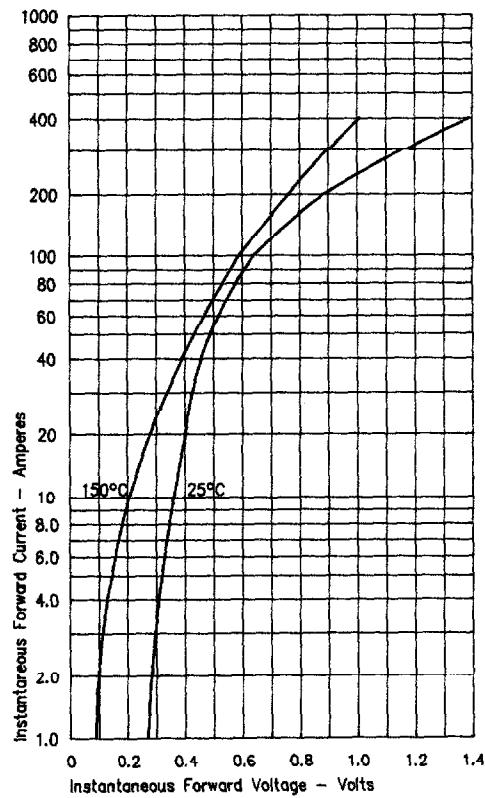


Figure 2  
Typical Reverse Characteristics – Per Leg

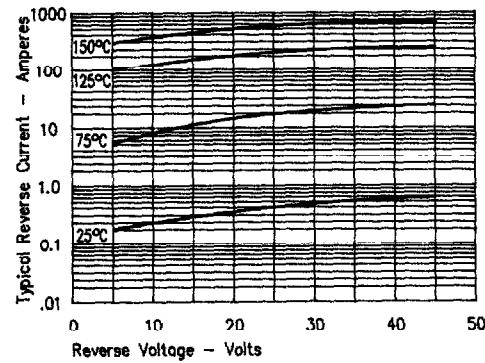


Figure 3  
Typical Junction Capacitance – Per Leg

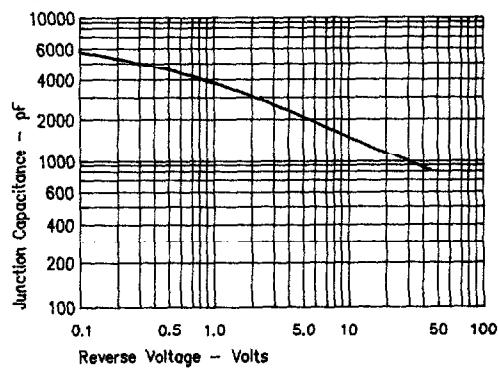


Figure 4  
Forward Current Derating – Per Leg

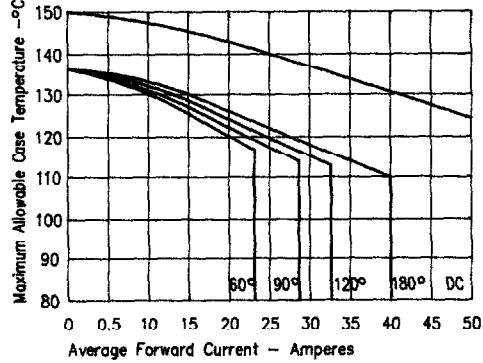


Figure 5  
Maximum Forward Power Dissipation – Per Leg

