


Ultra Fast Recovery Rectifiers

UF330, UF340, UF350

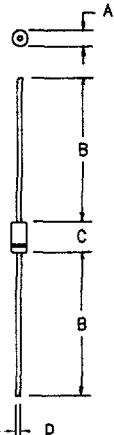

Dim. Inches		Millimeter			
		Minimum	Maximum	Minimum	Maximum Notes
A	.188	.188	.260	4.78	6.50 Dia.
B	1.00	—	—	25.4	—
C	.285	—	.375	7.24	9.52
D	.046	—	.056	1.17	1.42 Dia.

D

PLASTIC DO201AD

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage	• Ultra Fast Recovery • 175°C Junction Temperature • V _{RRM} 300 to 500 Volts • 3 Amp Current Rating • t _{RR} 50 ns Max.
UF330	300V	300V	
UF340	400V	400V	
UF350	500V	500V	

Electrical Characteristics

Average forward current	I _{F(AV)} 3.0 Amps	T _A = 115°C, Square wave, R _{θJL} = 17°C/W, L = 1/8"
Average forward current	I _{F(AV)} 3.0 Amps	T _A = 95°C, Square wave, R _{θJL} = 23°C/W = 3/8"
Maximum surge current	I _{FSM} 100 Amps	8.3ms, half sine, T _J = 175°C
Max peak forward voltage	V _{FM} .80 Volts	I _{FM} = 0.1A; T _J = 25°C*
Max peak forward voltage	V _{FM} 1.1 Volts	I _{FM} = 3.0A; T _J = 25°C*
Max reverse recovery time	t _{RR} 50 ns	1/2A, 1A, 1/4A, T _J = 25°C
Typical reverse recovery time	t _{RR} 25 ns	1/2A, 1A, 1/4A, T _J = 25°C
Max peak reverse current	I _{RM} 10 μA	V _{RRM} , T _J = 25°C
Typical junction capacitance	C _J 16 pF	V _R = 10V, T _J = 25°C

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range	T _{STG}	-40°C to 175°C
Operating junction temp range	T _J	-40°C to 175°C
Maximum thermal resistance	L = 1/8" R _{θJL}	17°C/W Junction to Lead
	L = 3/8" R _{θJL}	23°C/W Junction to Lead
Weight		.011 ounces (0.34 grams) typical

UF330, UF340, UF350

Figure 1
Typical Forward Characteristics

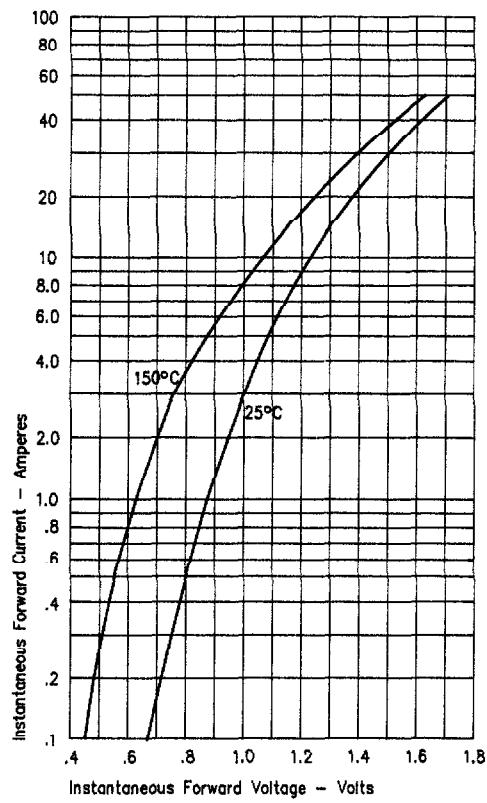


Figure 3
Typical Junction Capacitance

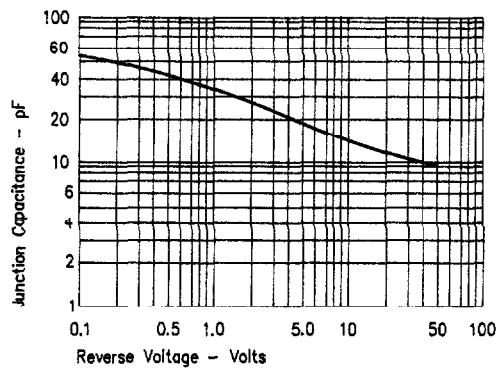


Figure 2
Typical Reverse Characteristics

