



# **Eight-Channel Fixed Filter and Amplifier Signal Conditioning Plug-on VT1509A**

---

## **User's Manual**

The VT1509A manual also applies to Agilent/HP E1413s as Agilent/HP E1413 Option 19.

Enclosed is the User's Manual for the VT1509A Signal Conditioning Plug-on. Insert this manual in your VT1413C and Agilent/HP E1313 manual behind the "Signal Conditioning Plug-ons" divider.



Copyright © VXI Technology, Inc., 2003



# VT1509A

## Eight-Channel Fixed Filter and Amplifier Signal Conditioning Plug-on

---

### Introduction

The VT1509A is a Signal Conditioning Plug-on that provides eight fixed low-pass filters with a 3 dB cutoff frequency of 7 Hz and eight amplifiers with gain of 64. Also provided is input over-voltage protection and open transducer detection on each channel.

### About this Manual

This manual shows you how to control the Signal Conditioning Plug-on (SCP) using SCPI commands as well as Register-Based commands, and explains the capabilities of this SCP. Finally, it covers specifications for this SCP. The contents of this manual are:

Installation . . . . .	3
Identifying the Plug-on . . . . .	3
Connecting To The Terminal Module . . . . .	4
Programming With SCPI Commands . . . . .	6
Programming With Register Commands . . . . .	8
Specifications . . . . .	10

### Installation

Installation for this Plug-on is common to several others and is covered in Chapters 1 and 2 of your VT1413C or Agilent/HP E1313 manual.

### Identifying the Plug-on

You'll find the VXI Technology part number on the connector side of the SCP to the left of the serial number bar code. For the VT1509A, the part number is : VT1509A.

# Connecting To The Terminal Module

This section shows how to make connections to the Terminal Module.

The SCP connections for the Terminal Modules are shown on the stick-on labels that came with the SCP. Use the appropriate label for the type of Terminal Module you have. The connections and appropriate stickers are as follows:

For VT1413C and above Terminal Modules, use stickers for VT1509A SCPs. The connections are shown in Figure 1.

For Agilent/HP E1313 Terminal Modules, use stickers for VT1509A SCPs. The connections are shown in Figures 2 and 3.

For Agilent/HP E1413B and below Terminal Modules, use stickers for HP E1413 Option 19 SCPs. The connections are shown in Figure 4.

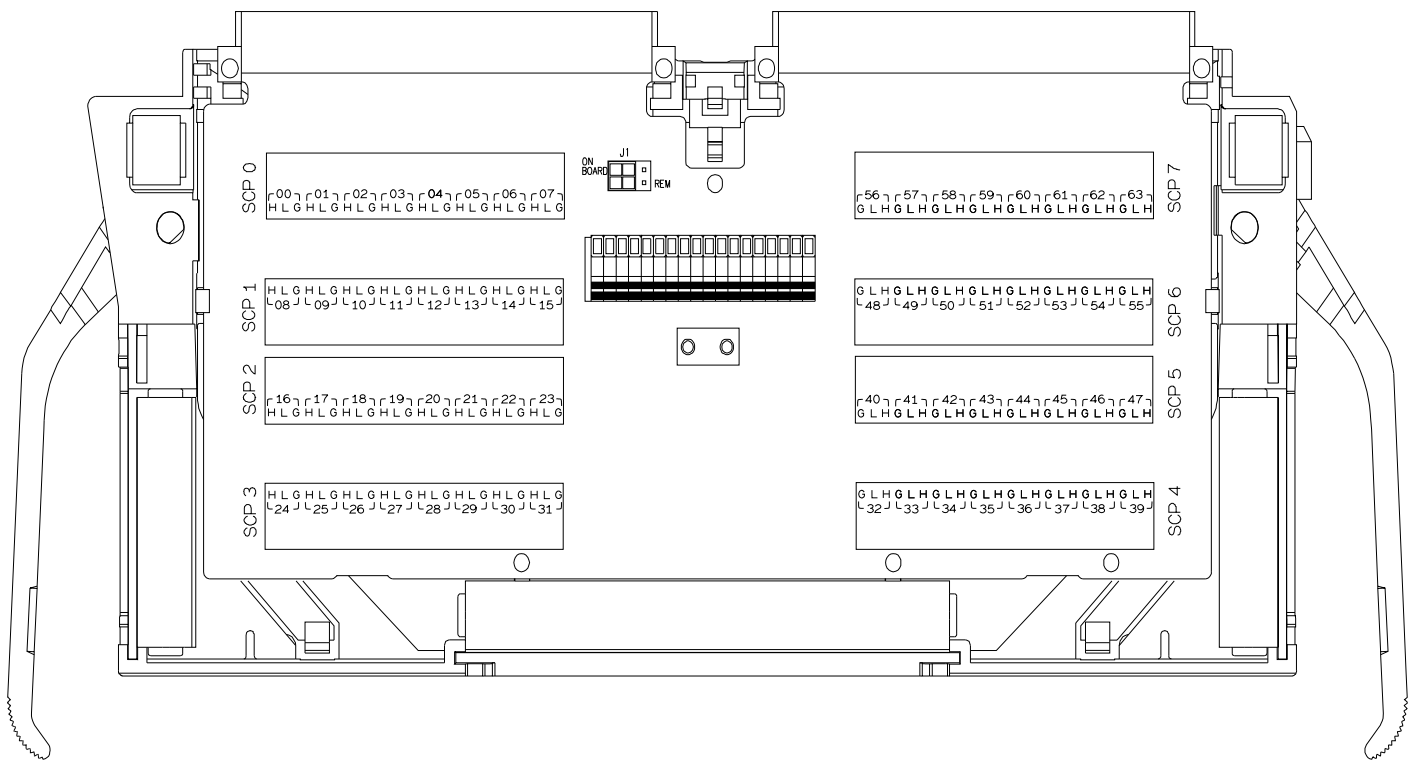


Figure 1 VT1509A C-Size Terminal Module Connections

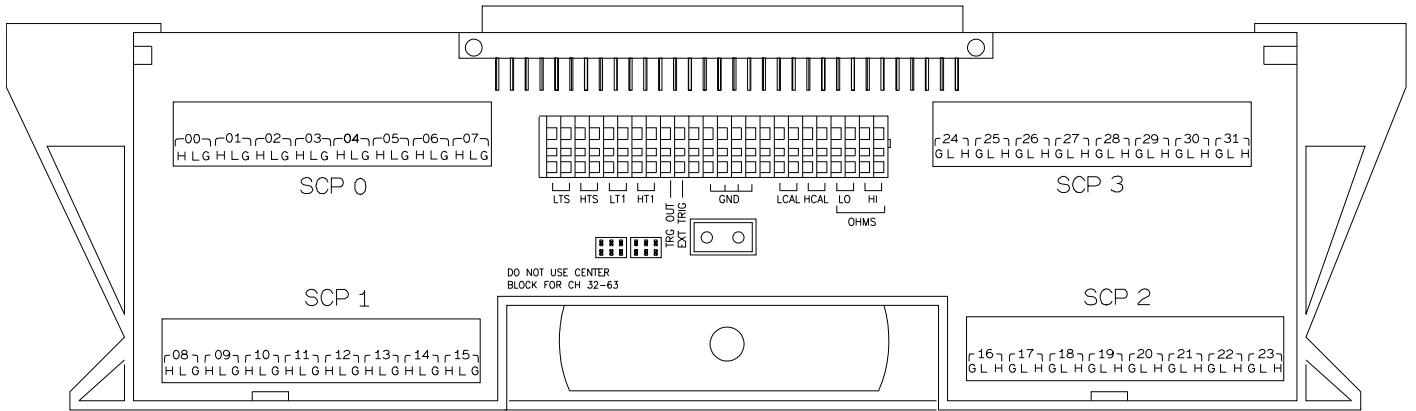


Figure 2 VT1509A B-size Terminal Module Connections (Ch 00-31)

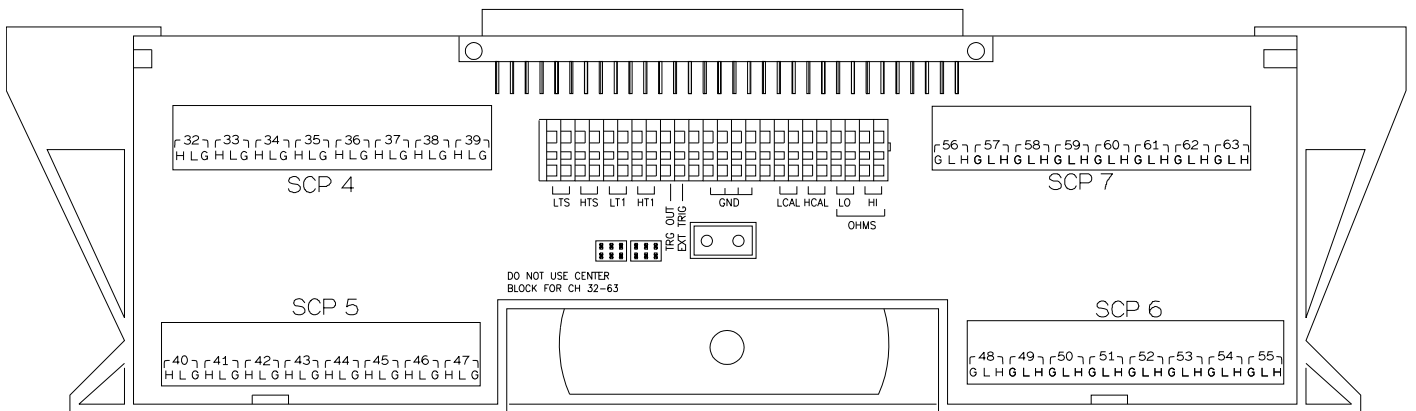


Figure 3 VT1509A B-size Terminal Module Connections (Ch 32-63)

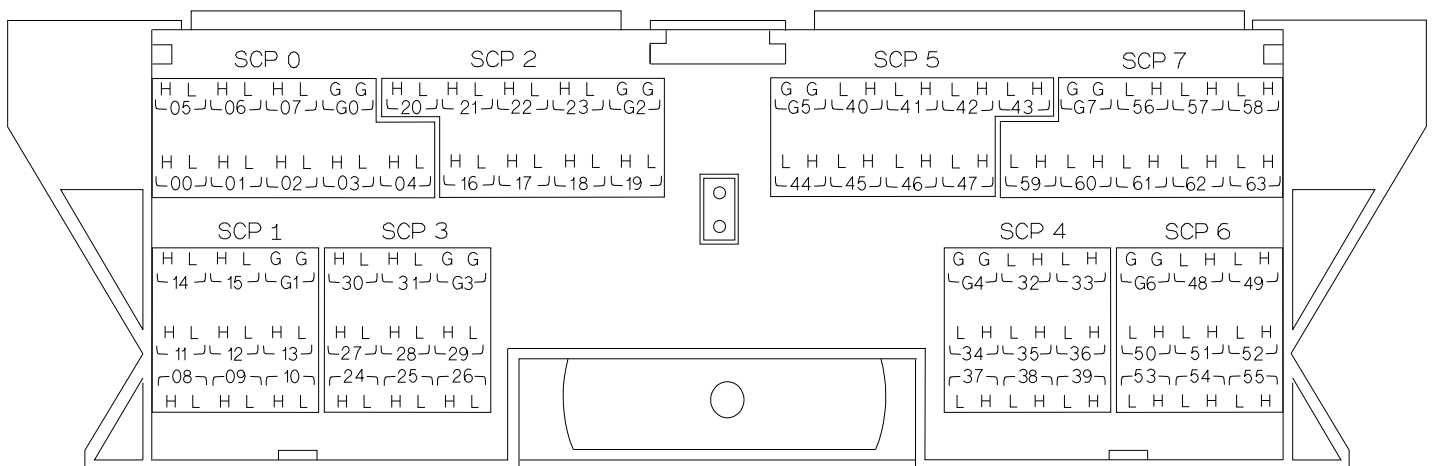


Figure 4 Agilent/HP E1413B Option 19 Terminal Module Connections



The channel parameter must specify a single channel.

To query the filter state of channel 2 send

```
INP:FILT? (@102)           query channel 2
enter statement here
```

## Querying the Channel Gain

While the VT1509A's amplifiers have fixed gain, the channel gain can be queried. The response to this query will always be 64. To query any channel to determine its gain setting use the INPut:GAIN? (@<channel>) command. The INP:GAIN? command returns the current gain value for the specified channel.

The channel parameter must specify a single channel.

To query the gain setting of channel 8 send

```
INP:GAIN? (@108)          query channel 8
enter statement here
```

## Detecting Open Transducers

This SCP provides a method to detect open transducers. When Open Transducer Detect (OTD) is enabled, the SCP injects a small current into the HIGH and LOW input of each channel. The polarity of the current pulls the HIGH inputs toward +17 volts and the LOW inputs towards -17 volts. If a transducer is open, measuring that channel will return an over-voltage condition. OTD is available on a per SCP basic. all eight channels of an SCP are enabled or disabled together. See Figure 5 for a simplified schematic diagram of the OTD circuit.

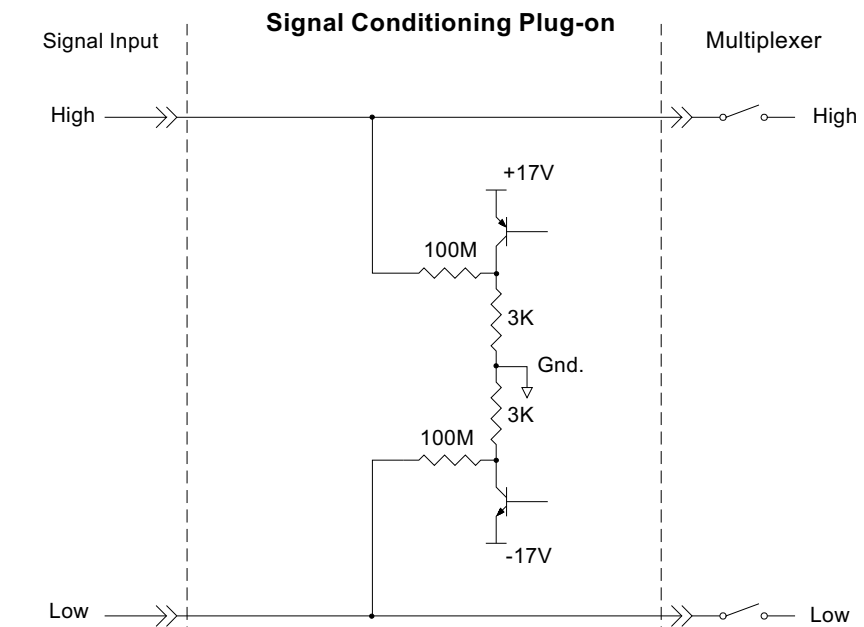


Figure 5 Open Transducer Detect Circuit





### VT1509A Register Map

Read (returned value)	Write( <regvalue>)	SCP Register	<regaddr> Value
SCP ID (9020 <sub>16</sub> )		Whole SCP Reg 0	00ppp000000 <sub>2</sub>

ppp=Plug-on  
ccc=SCP  
channel

In addition you will access bits in the Card Control register to control Open Transducer Detection.

### Checking ID of SCP

To query an SCP for its ID value, write the following value to Parameter Register 1:

(SCP number) 40<sub>16</sub>

Then write the opcode for SCBREAD? (0800<sub>16</sub>) to the Command Register. The ID value will be returned to the Query Response Register.

### Detecting Open Transducers

Open Transducer Detection (OTD) is controlled by bits in the Card Control Register. For more information on OTD see Figure 1.

Card Control Register (Base + 12<sub>16</sub>)

15	14	14-13	12	11	10-8	7-0
PSI Pwr Reset	FIFO Mode	unused	FIFO Clear	VPPEN	A24 Window	Open Transducer Detect

Writing a one (1) to a bit enables open transducer detect on that signal conditioning module. Writing a zero (0) to a bit disables open transducer detect.

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
SCP 7	SCP 6	SCP 5	SCP 4	SCP 3	SCP 2	SCP 1	SCP 0

# Specifications

These specifications for the VT1509A reflect the combined performance of the VT1413C or Agilent/HP E1313 and the VT1509A Signal Conditioning Plug-on. These specifications are not to be added to those presented in the VT1413C or Agilent/HP E1313 User's Manual.

## General Specifications

---

### Measurement ranges

DC Volts	±3.9 mV to ±0.25 V FS
Temperature	Thermocouples - -200 to +1700°C Thermistors - (Opt 15 required) -80 to +160°C RTD's - (Opt 15 required) -200 to +850°C
Resistance	(Opt 15 required) 128 to 131 k FS
Strain	25,000 $\mu\epsilon$ or limit of linear range of strain gage

---

**Maximum input voltage** Operating: < ±16 V peak Damage level: > ±42 V peak  
(Normal mode plus common mode)

---

**Maximum common mode voltage** Operating: < ±16 V peak Damage level: > ±42 V peak

---

**Normal mode rejection** @ 7 Hz -3 dB, @ 60 Hz >-25 dB

---

**Common mode rejection** 0 - 60 Hz -100 dB

---

**Input impedance** 100 M ±10% (each differential input to ground)

---

**Maximum tare cal offset** (Maximum tare offset depends on A/D range and SCP gain)

A/D range ±V F.Scale	16	4	1	0.25	0.0625
Max Offset	0.04970	0.01220	0.00297	0.00055	N/A

**Measurement accuracy  
DC Volts**

(90 days) 23°C±1°C (with \*CAL? done after 1 hr warm up and CAL:ZERO? within 5 min.). If autoranging is ON, add ±0.02% FS to accuracy specifications.  
**For Agilent/HP E1313, multiply Noise Spec. by 1.4.**

Gain 64	Range ±V FS	Linearity % of reading	Offset Error μV (10 Hz)	Noise μV 3 sigma	Noise μV* 3 sigma
	0.0039	0.01	2.3	1.7	1.4
0.0156	0.01	2.4	2.5	2.2	
0.0625	0.01	3.0	7.0	5.7	
0.25	0.01	8.0	28	23	

\* [SENSe:]FILTer[:LPASs][:STATe] ON (max scan rate - 100 rdgs/sec/channel)

Temperature Coefficients: Gain - 15 ppm/°C. Offset - (0 - 30°C) 0.16 μV/°C, (30 - 40°C) 0.18 μV/°C,  
(40 - 55°C) .39 μV

**Measurement accuracy  
Temperature**

(90 days) 23°C±1°C (with \*CAL? done after 1 hr warm up and CAL:ZERO? within 5 min.). If autoranging is ON, add ±0.02% FS to accuracy specifications.

(simplified specifications, see temperature accuracy graphs in VT1413C or Agilent/HP E1313 manual for details)

The temperature accuracy specifications include instrument and firmware linearization errors. The linearization algorithm used is based on the IPTS-68(78) standard transducer curves. Add your transducer accuracy to determine total measurement error.

**Thermocouples**

Type E	A/D Filter	-200 to 0°C	0 to 200°C	200 to 400°C	400 to 800°C
	OFF ON*	1.25°C 1.20°C	0.10°C 0.095°C	0.12°C 0.10°C	0.125°C 0.11°C
Type EExtended	A/D Filter	-200 to 0°C	0 to 200°C	200 to 800°C	800 to 1000°C
	OFF ON*	13.4°C 13.3°C	0.30°C 0.25°C	0.20°C 0.15°C	0.35°C 0.30°C
Type J	A/D Filter	-200 to 0°C	0 to 280°C	280 to 600°C	600 to 775°C
	OFF ON*	1.50°C 1.47°C	0.10°C 0.11°C	0.15°C 0.15°C	0.17°C 0.15°C
Type K	A/D Filter	-200 to 0°C	0 to 375°C	375 to 800°C	800 to 1400°C
	OFF ON*	2.25°C 2.70°C	0.15°C 0.15°C	0.20°C 0.17°C	0.25°C 0.25°C
Type R	A/D Filter	0 to 100°C	100 to 200°C	200 to 600°C	600 to 1000°C
	OFF ON*	1.40°C 1.40°C	0.75°C 0.70°C	0.45°C 0.40°C	0.30°C 0.30°C

\* [SENSe:]FILTer[:LPASs][:STATe] ON (max scan rate - 100 rdgs/sec/channel)

**Measurement accuracy  
Temperature (cont.)**

(simplified specifications, see temperature accuracy graphs in VT1413C or Agilent/  
HP E1313 manual for details)

**Thermocouples (cont.)**

Type S	A/D Filter	0 to 100°C	100 to 200°C	200 to 800 C	800 to 1750°C
	OFF	2.85°C	1.35°C	0.70°C	0.65°C
ON*	2.85°C	1.80°C	0.65°C	0.55°C	

Type T	A/D Filter	-200 to -100°C	-100 to 0°C	0 to 200°C	200 to 400°C
	OFF	1.35°C	0.25°C	0.10°C	0.15°C
ON*	1.35°C	0.22°C	0.10°C	0.13°C	

**5 k Reference Thermistor**

A/D Filter	45 to 65°C	65 to 85°C
OFF	0.0061°C	0.011°C
ON*	0.0055°C	0.010°C

**100 Reference RTD**

A/D Filter	-125 to 70°C
OFF	0.080°C
ON*	0.080°C

**100 RTD**

A/D Filter	-200 to 75°C	75 to 300°C	300 to 600°C	600 to 970°C
OFF	0.08°C	0.21°C	0.27°C	0.37°C
ON*	0.07°C	0.18°C	0.25°C	0.35°C

**2252 Thermistor**

A/D Filter	63 to 70°C	70 to 83°C	83 to 100°C
OFF	0.008°C	0.009°C	0.014°C
ON*	0.007°C	0.008°C	0.012°C

**5 k Thermistor**

A/D Filter	15 to 30°C	30 to 70°C	70 to 85°C
OFF	0.011°C	0.013°C	0.017°C
ON*	0.010°C	0.013°C	0.017°C

**10 k Thermistor**

A/D Filter	30 to 60°C	60 to 90°C	90 to 115°C
OFF	0.015°C	0.016°C	0.022°C
ON*	0.014°C	0.015°C	0.020°C