



# **Eight-Channel Low-Pass Filter Signal Conditioning Plug-on VT1522**

---

## **User's Manual**

The VT1522 manual also applies to Agilent/HP E1413Bs as Agilent/HP E1413 Option 12.

Enclosed is the User's Manual for the VT1522 Signal Conditioning Plug-on. Insert this manual in your VT1413C or Agilent/HP E1313 manual behind the "Signal Conditioning Plug-ons" divider.



Copyright © VXI Technology, Inc., 2005



# VT1522

## Eight-Channel Low-Pass Filter Signal Conditioning Plug-on

---

### Introduction

The VT1522 is a signal conditioning plug-on that provides eight fixed low-pass filters with a nominal cutoff frequency of 100 Hz. Also provided is input over-voltage protection and open transducer detection on each channel.

### About this Manual

This manual shows you how to control the signal conditioning plug-on (SCP) using SCPI commands as well as Register-Based commands, and explains the capabilities of this SCP. Finally, it covers specifications for this SCP. The contents of this manual are:

Installation . . . . .	3
Identifying the Plug-on . . . . .	3
Connecting To The Terminal Module . . . . .	4
Programming With SCPI Commands . . . . .	6
Programming With Register Commands . . . . .	8
Specifications . . . . .	10

### Installation

Installation for this plug-on is common to several others and is covered in Chapters 1 and 2 of your VT1413C or Agilent/HP E1313A manual.

### Identifying the Plug-on

You'll find the VXI Technology part number on the connector side of the SCP to the left of the serial number bar code. For the VT1522, the part number is: VT1522.

# Connecting to the Terminal Module

This section shows how to make connections to the terminal module.

The SCP connections for the terminal modules are shown on the stick-on labels that came with the SCP. Use the appropriate label for the type of terminal module you have. The connections and appropriate stickers are as follows:

- For VT1413C and above terminal modules, use stickers for VT1522 SCPs. The connections are shown in Figure 1.
- For Agilent/HP E1313 terminal modules, use stickers for VT1522 SCPs. The connections are shown in Figures 2 and 3.
- For Agilent/HP E1413B and below terminal modules, use stickers for Agilent/HP E1413 Option 12 SCPs. The connections are shown in Figure 4.



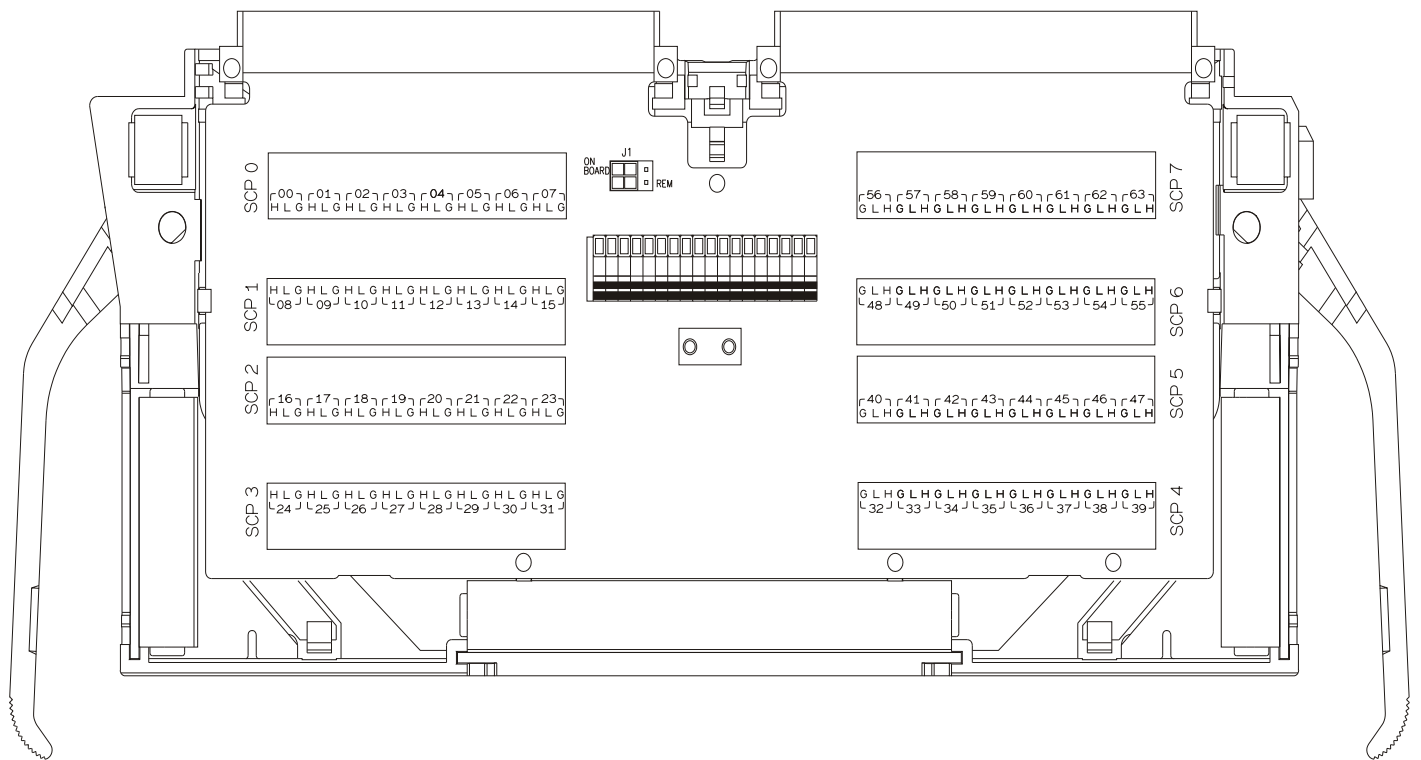



Figure 1 VT1522 C-Size Terminal Module Connections

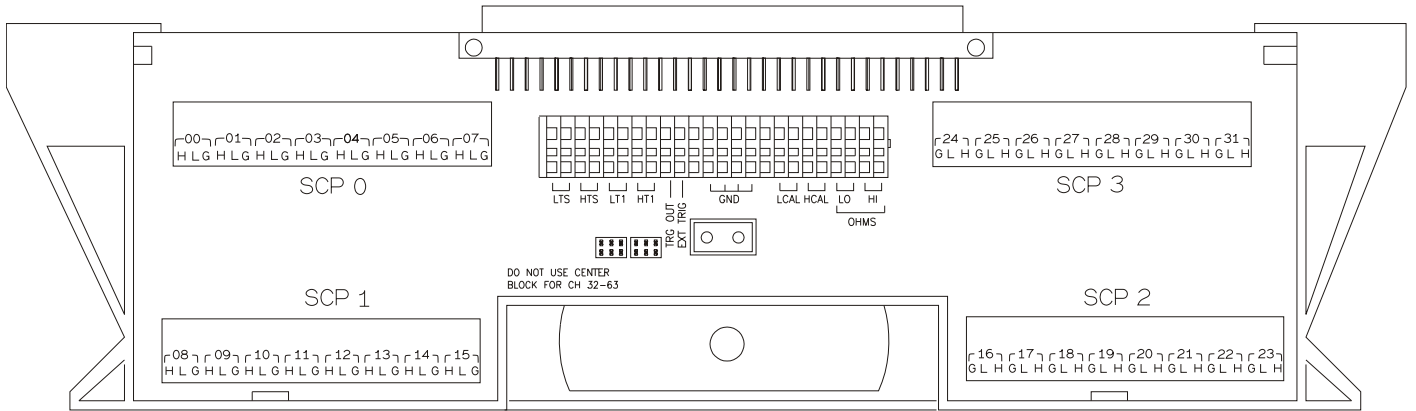

**Figure 2 VT1522 B-size Terminal Module Connections (Ch 00-31)**

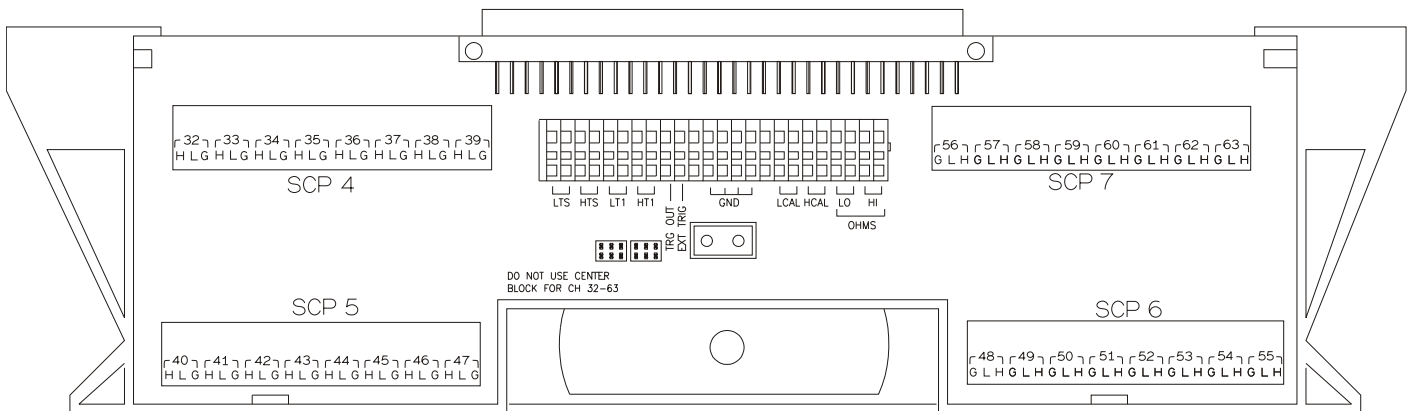

**Figure 3 VT1522 B-size Terminal Module Connections (Ch 32-63)**

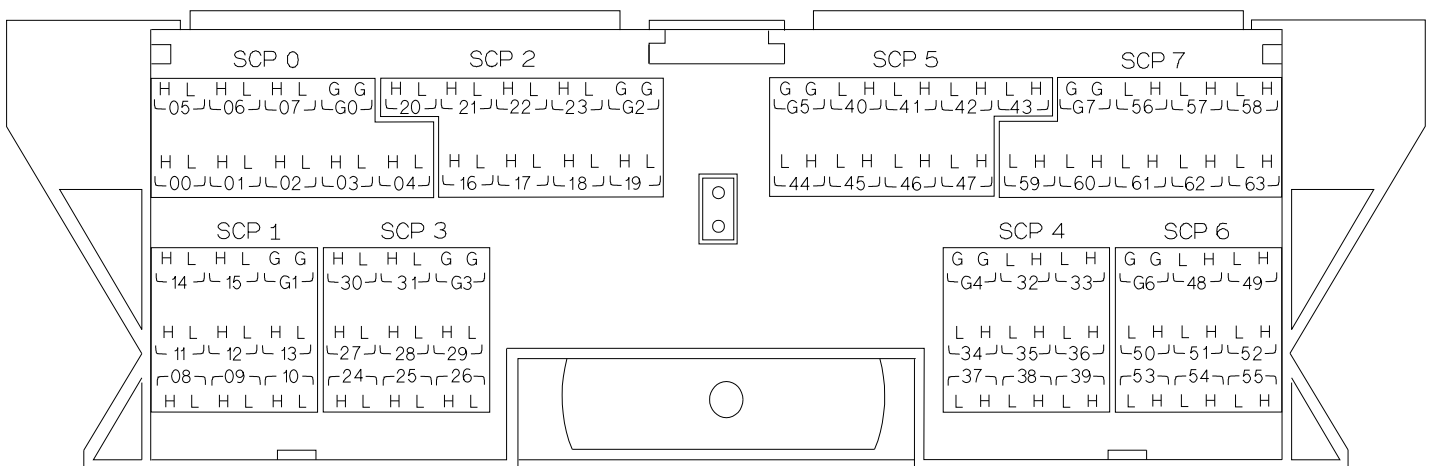

**Figure 4 Agilent/HP E1413 Option 12 Terminal Module Connections**

# Programming with SCPI Commands

The SCPI commands shown here are covered in Chapters 3 and 5 of your VT1413C or Agilent/HP E1313 manual. This section will relate those commands to the parameter values which are specific to this Plug-on.

## Checking the ID of the SCP

To verify the SCP type(s) installed on the VT1413C or Agilent/HP E1313 use the SYSTem:CTYPe? (@<channel>) command.

The channel parameter specifies a single channel in the channel range covered by the SCP of interest. The first channel number for each of the eight SCP positions are; 0,8,16,24,32,40,48 and 56.

The value returned for the SCP in an Agilent/HP E1413B is:  
HEWLETT-PACKARD,E1413 Opt 12 8-Channel Fixed Filter SCP,0,0

The returned value for the SCP in a VT1413C and Agilent/HP E1313A is:  
HEWLETT-PACKARD,E1502 8-Channel Fixed Filter SCP,0,0

To determine the type of SCP installed on channels 0 through 7 send

```
SYST:CTYP? (@100)           query SCP type @ ch 0  
enter statement here
```

## Querying the Filter State

While the low-pass filter SCP does not allow controlling whether the filters are enabled or disabled, this state can be queried. The response to this query will always be 1. To query any channel to determine if it is enabled or disabled use the INP:FILTer[:LPASs][:STATe]? (@<channel>) command. The INP:FILT? command returns a 0 if the channel is OFF or a 1 if the channel is ON.

The channel parameter must specify a single channel.

To query the filter state of channel 2 send

```
INP:FILT? (@102)           query channel 2  
enter statement here
```

## Querying the Channel Gain

While the low-pass filter SCP does not provide amplifiers, the channel gain can be queried. The response to this query will always be 1. To query any channel to determine its gain setting use the INP:GAIN? (@<channel>) command. The INP:GAIN? command returns the current gain value for the specified channel.

The channel parameter must specify a single channel.

To query the gain setting of channel 8 send

INP:GAIN? (@108)

query channel 8

*enter statement here*

## Detecting Open Transducers

This SCP provides a method to detect open transducers. When open transducer detect (OTD) is enabled, the SCP injects a small current into the HIGH and LOW input of each channel. The polarity of the current pulls the HIGH inputs toward +17 V and the LOW inputs towards -17 V. If a transducer is open, measuring that channel will return an over-voltage condition. OTD is available on a per SCP basic. all eight channels of an SCP are enabled or disabled together. See Figure 5 for a simplified schematic diagram of the OTD circuit.

### NOTES

1) When OTD is enabled, the inputs have up to 0.2  $\mu\text{A}$  injected into them. If this current will adversely affect your measurement, but you still want to check for open transducers, you can enable OTD, make a single scan, check the CVT for bad measurements, then disable OTD and make your regular measurement scans. The specifications apply only when OTD is off.

2) Allow 5 minutes before checking for open transducers to allow filter capacitors to charge.

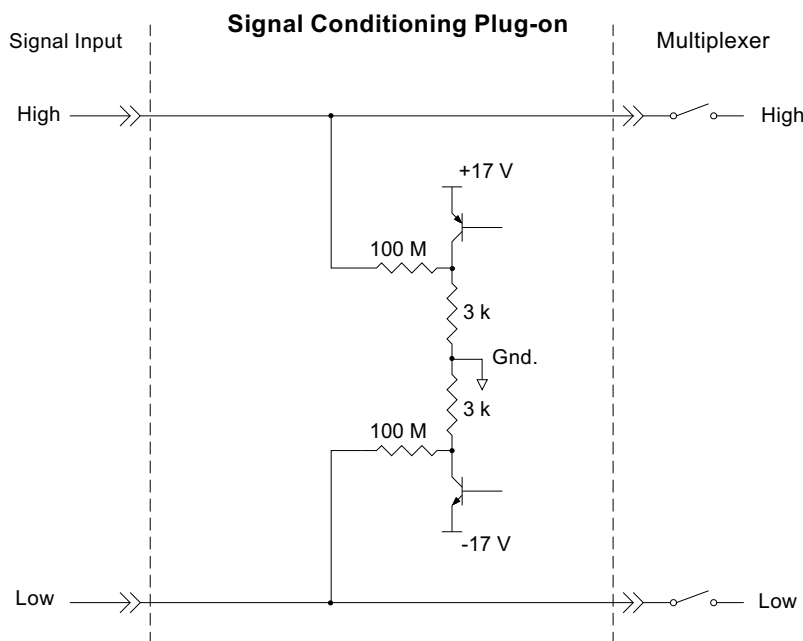


Figure 5 Open Transducer Detect Circuit

To enable or disable OTD, use the DIAGnostic:OTDetect *<enable>*, (*@<ch\_list>*) command.

The enable parameter can specify ON or OFF

An SCP is addressed when the ch\_list parameter specifies a channel number contained on the SCP. The first channel on each SCP is:  
0, 8, 16, 24, 32, 40, 48 and 56

To enable OTD on all channels on SCPs 1 and 3:

DIAG:OTD ON, (@100,116)                      0 is on SCP 1 and 16 is on SCP3

To disable OTD on all channels on SCPs 1 and 3:

DIAG:OTD OFF, (@100,116)

## Register Based Programming

The register-based commands shown here are covered in Appendix D of the VT1413C or Agilent/HP E1313 manual. You should read that section first to become familiar with accessing registers and executing Register-Based Commands. This section will relate those commands to the parameter values which are specific to this Plug-on.

When Register Programming an SCP most communication is through the Signal Conditioning Bus. For that you will use the Register Commands:

SCBWRITE *<regaddr>* *<regvalue>*

and

SCBREAD? *<regaddr>*



### VT1522 Register Map

Read (returned value)	Write( <regvalue>)	SCP Register	<regaddr> Value
SCP ID (8080 <sub>16</sub> )		Whole SCP Reg 0	00ppp000000 <sub>2</sub>

ppp=Plug-on  
ccc=SCP  
channel

In addition you will access bits in the card control register to control OTD.

### Checking ID of SCP

To query an SCP for its ID value, write the following value to Parameter Register 1:

(SCP number) 40<sub>16</sub>

Then write the opcode for SCBREAD? (0800<sub>16</sub>) to the Command Register.

The ID value will be written to the Query Response Register.

### Detecting Open Transducers

Open Transducer Detection (OTD) is controlled by bits in the Card Control Register. For more information on OTD see Figure 1.

#### Card Control Register (Base + 12<sub>16</sub>)

15	14	14-13	12	11	10-8	7-0
PSI Pwr Reset	FIFO Mode	unused	FIFO Clear	VPPEN	A24 Window	Open Transducer Detect

Writing a one (1) to a bit enables open transducer detect on that signal conditioning module. Writing a zero (0) to a bit disables open transducer detect.

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
SCP 7	SCP 6	SCP 5	SCP 4	SCP 3	SCP 2	SCP 1	SCP 0

# Specifications

These specifications for the VT1522 reflect the combined performance of the VT1413C or Agilent/HP E1313 and the VT1522 signal conditioning plug-on. These specifications are not to be added to those presented in the VT1413C or Agilent/HP E1313 User's Manual.

## General Specifications

---

### Measurement ranges

Volts (dc)	$\pm 62.5$ mV to $\pm 16$ V FS
Temperature	Thermocouples - -200 to +1700 °C Thermistors - (Opt 15 required) -80 to +160 °C RTD's - (Opt 15 required) -200 to +850 °C
Resistance	(Opt 15 required) 128 to 131 k FS
Strain	25,000 $\mu$ or limit of linear range of strain gage

---

**Maximum input voltage** (Normal mode plus common mode)      Operating:  $< 16$  V peak      Damage level:  $> \pm 42$  V peak

---

**Maximum common mode voltage**      Operating:  $< \pm 16$  V peak      Damage level:  $> \pm 42$  V peak

---

**Normal mode rejection**      -3.5 dB @ 100 Hz  
 $> -24$  dB @ 600 Hz

---

**Common mode rejection**      0 Hz - 600 Hz @ -90 dB

---

**Input impedance**      100 M  $\pm 10\%$  (each differential input to ground)

---

**Maximum tare cal offset**      (Maximum tare offset depends on A/D range and SCP gain)

A/D range $\pm$ V F.Scale	16	4	1	0.25	0.0625
Max Offset	3.2213	0.82101	0.23061	0.07581	0.03792

**Measurement accuracy  
(dc volts)**

(90 days) 23 °C ± 1 °C (with \*CAL? done after 1 hr warm up and CAL:ZERO? within 5 min.). If autoranging is ON, add ±0.02% FS to accuracy specifications.  
**For E1313, multiply Noise Spec. by 1.4.**

Range ±V FS	Linearity % of reading	Offset Error	Noise 3 sigma	Noise* 3 sigma
0.0625	0.01%	7.2 µV	34 µV	15 µV
0.25	0.01%	12.2 µV	60 µV	28 µV
1	0.01%	33 µV	110 µV	92 µV
4	0.01%	122 µV	450 µV	366 µV
16	0.01%	488 µV	1.8 mV	1.5 mV

\* [SENSE:]FILTer[:LPASs][:STATe] ON (max scan rate - 100 readings/second/channel)

Temperature Coefficients: Gain - 10 ppm/°C. Offset - (0 °C - 30 °C) no additional error, (30 °C - 40 °C) 0.1 µV/°C, (40 °C - 55 °C) 2.4 µV+0.27 µV/°C

**Measurement accuracy  
Temperature**

(90 days) 23 °C ± 1 °C (with \*CAL? done after 1 hr warm up and CAL:ZERO? within 5 min.). If autoranging is ON, add ±0.02% FS to accuracy specifications.

(simplified specifications, see temperature accuracy graphs in VT1413C/Agilent/HP E1313 manual for details)

The temperature accuracy specifications include instrument and firmware linearization errors. The linearization algorithm used is based on the IPTS-68(78) standard transducer curves. Add your transducer accuracy to determine total measurement error.

**Thermocouples**

<b>Type E</b>	A/D Filter	-200 °C to 0 °C	0 °C to 200 °C	200 °C to 400 °C	400 °C to 800 °C
	OFF ON*	2.25 °C 1.65 °C	0.65 °C 0.34 °C	0.50 °C 0.24 °C	0.45 °C 0.23 °C
<b>Type EExtended</b>	A/D Filter	-200 °C to 0 °C	0 °C to 200 °C	200 °C to 600 °C	600 °C to 800 °C
	OFF ON*	14.7 °C 13.8 °C	0.80 °C 0.49 °C	0.50 °C 0.30 °C	0.80 °C 0.45 °C
<b>Type J</b>	A/D Filter	-200 °C to 0 °C	0 °C to 200 °C	200 °C to 600 °C	600 °C to 775 °C
	OFF ON*	2.65 °C 2.00 °C	0.75 °C 0.38 °C	0.63 °C 0.32 °C	0.63 °C 0.32 °C
<b>Type K</b>	A/D Filter	-200 °C to 0 °C	0 °C to 400 °C	400 °C to 800 °C	800 °C to 1400 °C
	OFF ON*	4.30 °C 3.35 °C	0.90 °C 0.50 °C	0.85 °C 0.40 °C	1.10 °C 0.52 °C
<b>Type R</b>	A/D Filter	0 °C to 100 °C	100 °C to 200 °C	200 °C to 600 °C	600 °C to 1000 °C
	OFF ON*	6.90 °C 3.80 °C	5.00 °C 2.60 °C	4.00 °C 1.95 °C	3.10 °C 1.70 °C

\* [SENSE:]FILTer[:LPASs][:STATe] ON (max scan rate - 100 readings/second/channel)

**Measurement accuracy  
Temperature (cont.)**

(simplified specifications, see temperature accuracy graphs in VT1413C/ Agilent/HP E1313 manual for details)

**Thermocouples (cont.)**

Type S	A/D Filter	0 °C to 100 °C	100 °C to 200 °C	200 °C to 800 °C	800 °C to 1750 °C
	OFF	8.00 °C	5.60 °C	4.45 °C	3.30 °C
	ON*	5.20 °C	3.25 °C	2.40 °C	1.60 °C

Type T	A/D Filter	-200 °C to -100 °C	-100 °C to 0 °C	0 °C to 200 °C	200 °C to 400 °C
	OFF	3.40 °C	1.90 °C	0.90 °C	0.70 °C
	ON*	2.25 °C	0.78 °C	0.46 °C	0.33 °C

**5 k Reference Thermistor**

A/D Filter	-10 °C to 65 °C	65 °C to 85 °C
OFF	0.011 °C	0.021 °C
ON*	0.0095 °C	0.0115 °C

**100 Reference RTD**

A/D Filter	-125 °C to 75 °C
OFF	0.75 °C
ON*	0.36 °C

**100 RTD**

A/D Filter	-200 °C to 75 °C	75 °C to 300 °C	300 °C to 600 °C	600 °C to 970 °C
OFF	0.19 °C	0.37 °C	0.43 °C	0.53 °C
ON*	0.11 °C	0.21 °C	0.36 °C	0.46 °C

**2252 Thermistor**

A/D Filter	0 °C to 30 °C	30 °C to 70 °C	70 °C to 80 °C	80 °C to 100 °C
OFF	0.012 °C	0.013 °C	0.014 °C	0.024 °C
ON*	0.010 °C	0.012 °C	0.010 °C	0.014 °C

**5 k Thermistor**

A/D Filter	0 °C to 30 °C	30 °C to 70 °C	70 °C to 85 °C
OFF	0.014 °C	0.027 °C	0.048 °C
ON*	0.011 °C	0.017 °C	0.027 °C

**10 k Thermistor**

A/D Filter	0 °C to 30 °C	30 °C to 60 °C	60 °C to 90 °C	90 °C to 115 °C
OFF	0.015 °C	0.024 °C	0.034 °C	0.059 °C
ON*	0.013 °C	0.016 °C	0.021 °C	0.032 °C