


Ultra Fast Recovery Rectifiers

UFR30, 31 & 32

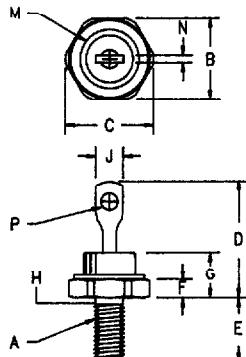

Notes:

1. 10-32 UNF3A threads
2. Full threads within 2 1/2 threads Standard Polarity:
Stud is Cathode
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	----	----	----	----	1
B	.424	.437	10.77	11.10	
C	----	.505	----	12.82	
D	.600	.800	15.24	20.32	
E	.422	.453	10.72	11.50	
F	.075	.175	1.91	4.44	
G	----	.405	----	10.29	
H	.163	.189	4.15	4.80	2
J	.100	.310	2.54	7.87	
M	----	.350	----	8.99	Dia.
N	.020	.065	.510	1.65	
P	.070	.100	1.78	2.54	Dia.

D

DO203AA (D04)

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage
UFR3005*	50V	50V
UFR3010*	100V	100V
UFR3015*	150V	150V
UFR3020*	UFR3120*	200V
	UFR3130*	300V
	UFR3140*	400V
UFR3250*	UFR3150*	500V
UFR3260*		600V
UFR3270*		700V
UFR3280*		800V

*Add Suffix R For Reverse Polarity

- Ultra Fast Recovery Rectifier
- 175°C Junction Temperature
- V_{RRM} 50 to 800V
- High Reliability
- 30 Amps current rating
- t_{RR} 35 to 60 nsec maximum

Electrical Characteristics

	UFR30	UFR31	UFR32	
Average forward current	$I_F(AV)$ 30A	30A	30A	Square wave, $R_{\theta JC} = 1.8^{\circ}\text{C}/\text{W}$
Case Temperature	T_C 127°C	110°C	107°C	
Maximum surge current	I_{FSM} 500A	400A	300A	8.3 ms, half sine, $T_J = 175^{\circ}\text{C}$
Max peak forward voltage	V_{FM} .975V	1.25V	1.35V	$I_{FM} = 30\text{A}$; $T_J = 25^{\circ}\text{C}^*$
Max reverse recovery time	t_{RR} 35 ns	50 ns	60 ns	1/2A, 1A, 1/4A, $T_J = 25^{\circ}\text{C}$
Typical reverse recovery time	t_{RR} 26 ns	36 ns	50 ns	1/2A, 1A, 1/4A, $T_J = 25^{\circ}\text{C}$
Max peak reverse current	I_{RM} 1.0 mA	—	—	V_{RRM} , $T_J = 125^{\circ}\text{C}$
Max peak reverse current	I_{RM} 15 μA	—	—	V_{RRM} , $T_J = 25^{\circ}\text{C}$
Typical Junction Capacitance	C_J 140 pF	115 pF	100 pF	$V_R = 10\text{V}$, $f = 1\text{MHz}$, $T_J = 25^{\circ}\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	TSTG	-65°C to 175°C
Operating junction temp range	T_J	-65°C to 175°C
Max thermal resistance	$R_{\theta JC}$	1.8°C/W Junction to Case
Typical thermal resistance	$R_{\theta JC}$	1.3°C/W Junction to Case
Typical thermal resistance	$R_{\theta CS}$	0.4°C/W Case to sink
Max mounting torque		15.0 inch pounds
Typical Weight		0.2 ounces (6.0 grams)

UFR30

Figure 1
Typical Forward Characteristics

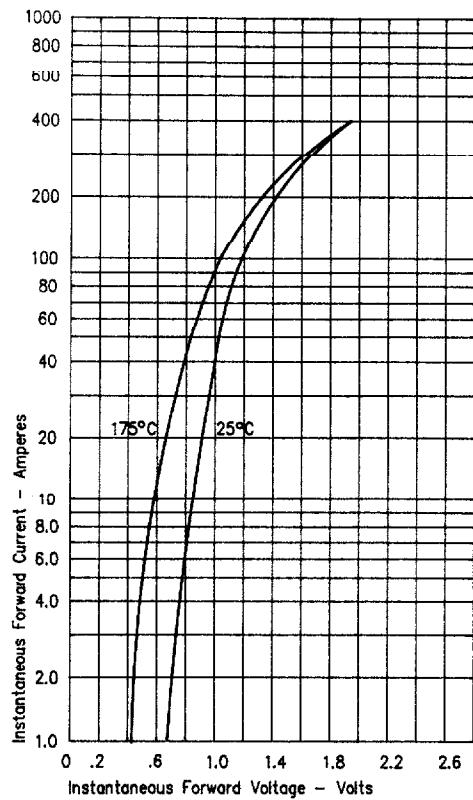


Figure 3
Typical Junction Capacitance

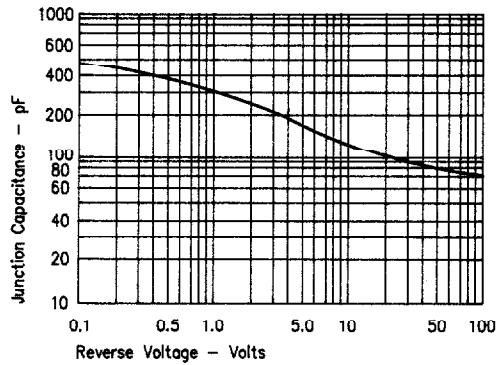


Figure 4
Forward Current Derating

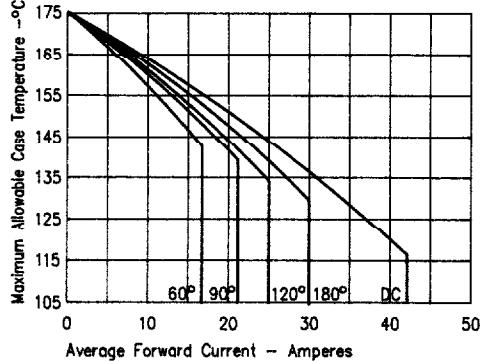


Figure 2
Typical Reverse Characteristics


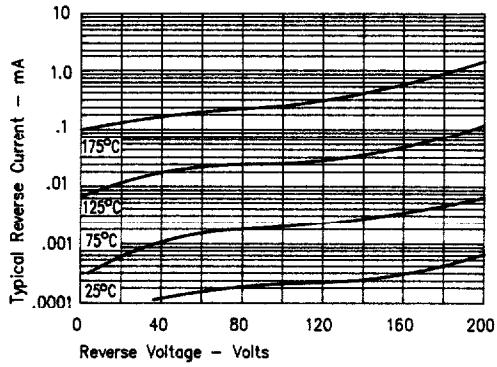


Figure 5
Maximum Forward Power Dissipation

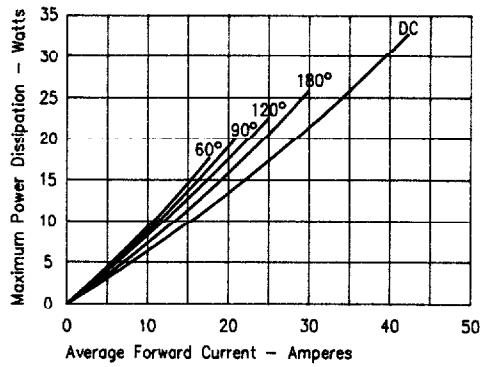

UFR31

Figure 1
Typical Forward Characteristics

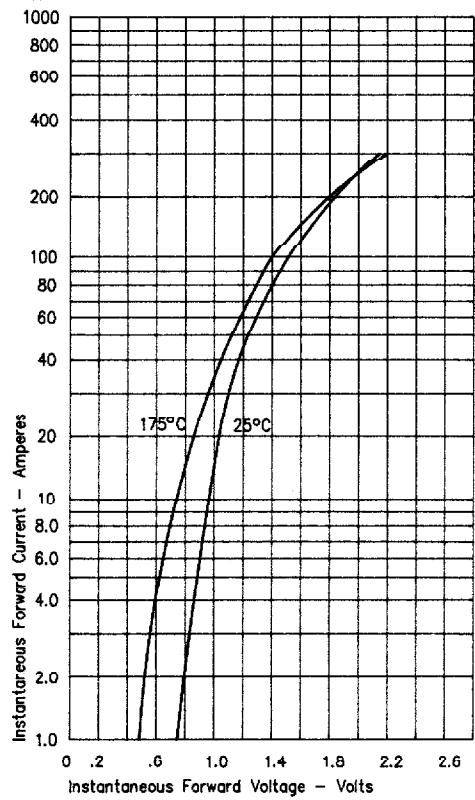


Figure 2
Typical Reverse Characteristics


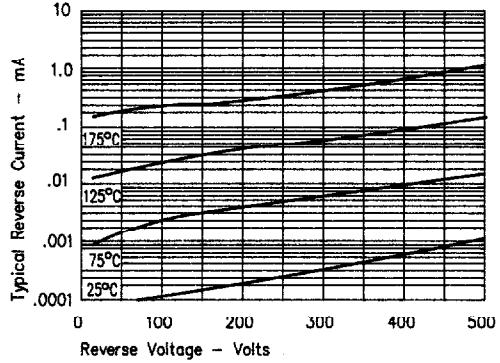


Figure 3
Typical Junction Capacitance

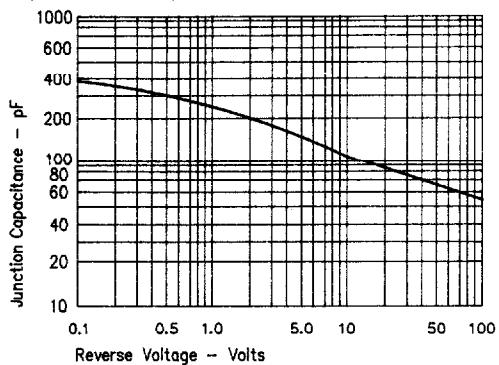

D

Figure 4
Forward Current Derating


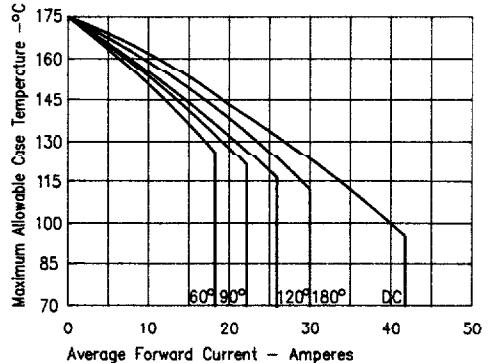


Figure 5
Maximum Forward Power Dissipation

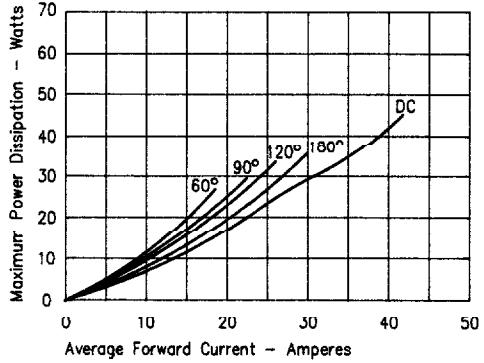

UFR32

Figure 1
Typical Forward Characteristics

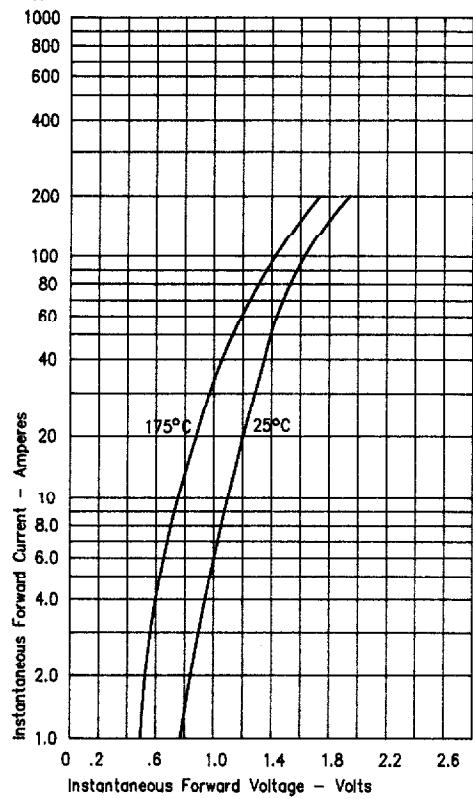


Figure 3
Typical Junction Capacitance

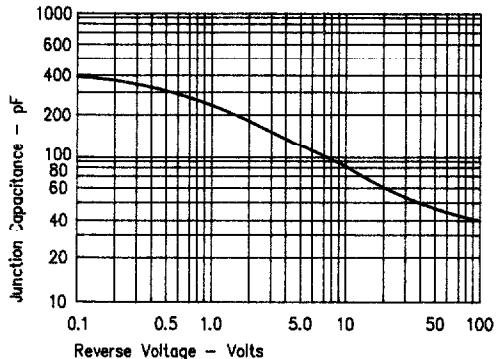


Figure 4
Forward Current Derating

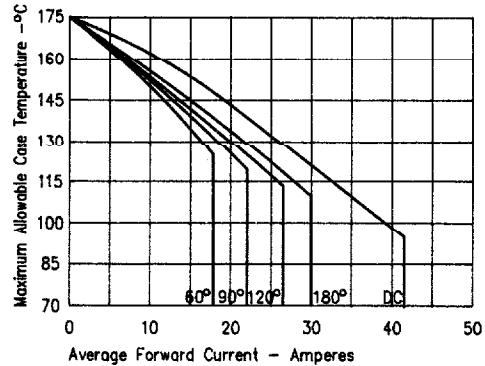


Figure 2
Typical Reverse Characteristics

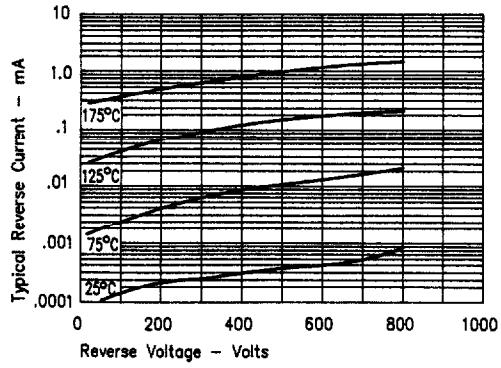


Figure 5
Maximum Forward Power Dissipation

