


# Military Fast Recovery Rectifier 1N3909A — 1N3913A

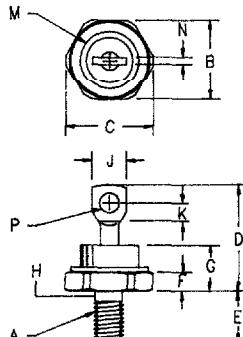

Notes:  
 1. Full threads within 2 1/2 threads  
 2. Standard Polarity: Stud is Cathode

Dim.	Inches		Millimeter			Notes
	Minimum	Maximum	Minimum	Maximum		
A	—	—	—	—	—	1/4-28
B	.669	.688	16.99	17.48		
C	—	.794	—	20.16		
D	.750	1.000	19.05	25.40		
E	.422	.453	10.72	11.51		
F	.115	.200	2.92	5.08		
G	—	.450	—	11.43		
H	.220	.249	5.58	6.32	1	
J	.250	.375	6.35	9.53		
K	.150	—	3.90	—		
M	—	.667	—	16.94	Dia.	
N	.030	.080	.760	2.03		
P	.140	.175	3.56	4.45	Dia.	

D

D0203AB (D05)

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
1N3909A*	50V	50V	
1N3910A*	100V	100V	
1N3911A*	200V	200V	
1N3912A*	300V	300V	
1N3913A*	400V	400V	

\*Add the Suffix R for reverse polarity

- Fast Recovery Rectifier
- Available in JAN, JANTX, JANTXV
- Mil-S-19500/308A
- 150°C Junction Temperature
- 50 Amp current rating
- VRRM 50 to 400 Volts

## Electrical Characteristics

Average forward current	$I_F(AV) = 50$ Amps	$T_C = 100^\circ\text{C}$ , Square wave, $R_{\theta JC} = 0.8^\circ\text{C}/\text{W}$
Maximum surge current	$I_{FSM} = 400$ Amps	8.3 ms, half sine $T_C = 100^\circ\text{C}$
Max peak forward voltage	$V_{FM} = 2.75$ Volts	$I_{FM} = 400\text{A}$ ; $T_J = 25^\circ\text{C}$ (800μs pulse width)
Max peak forward voltage	$V_{FM} = 1.40$ Volts	$I_{FM} = 50\text{A}$ $T_J = 25^\circ\text{C}$ *
Max peak reverse current	$I_{RM} = 15 \mu\text{A}$	$V_{RRM}, T_J = 25^\circ\text{C}$
Max peak reverse current	$I_{RM} = 6 \text{ mA}$	$V_{RRM}, T_J = 150^\circ\text{C}$
Max reverse recovery time	$t_{RR} = 150 \text{ ns}$	$I_F = 1\text{A dc}, V_R = 30\text{V}, di/dt = 25\text{A}/\mu\text{s}$
Typical reverse recovery time	$t_{RR} = 125 \text{ ns}$	$I_F = 1\text{A dc}, V_R = 30\text{V}, di/dt = 25\text{A}/\mu\text{s}$
Max junction capacitance	$C_J = 150 \text{ pF}$	$V_R = 10\text{V}, f = 1\text{MHz}, T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	-65°C to 175°C
Operating junction temp range	$T_J$	-65°C to 150°C
Max thermal resistance	$R_{\theta JC}$	0.8°C/W Junction to case
Typical thermal resistance		0.75°C/W Junction to case
Max mounting torque		30 inch pounds maximum
Weight		.54 ounces (15.3 grams) typical

# 1N3909A - 1N3913A

Figure 1  
Typical Forward Characteristics

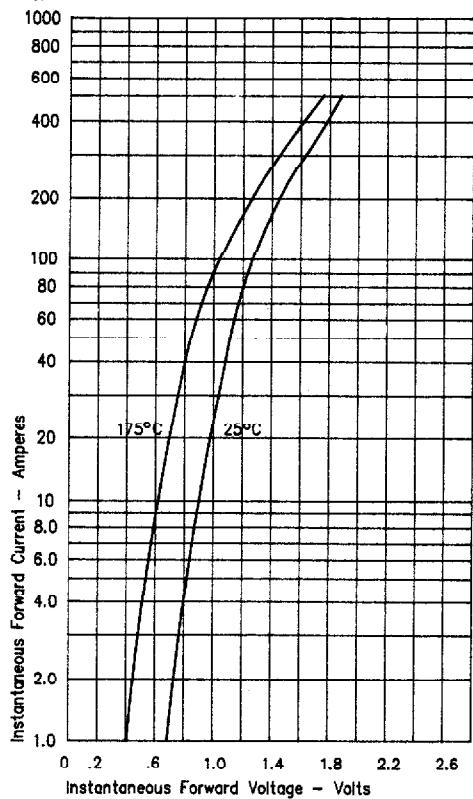


Figure 3  
Typical Junction Capacitance

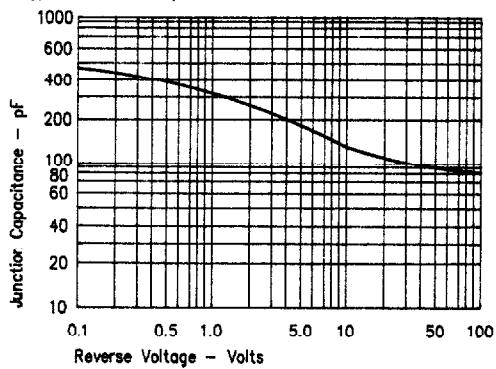


Figure 4  
Forward Current Derating

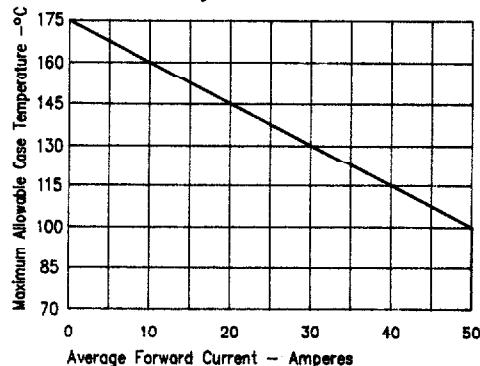


Figure 2  
Typical Reverse Characteristics

