



**Microsemi Corp.**  
The diode experts

# 1EZ110D5 thru 1EZ200D5

SCOTTSDALE, AZ  
For more information call:  
(602) 941-6300

## FEATURES

- ZENER VOLTAGE 110 V TO 200 V
- WITHSTANDS LARGE SURGE STRESSES
- ALSO AVAILABLE IN GLASS. (See Note 6.)

## MAXIMUM RATINGS

Junction and Storage Temperatures: -65°C to +175°C  
DC Power Dissipation: 1 Watt  
Power Derating: 13.3 mW/°C above 100°C  
Forward Voltage @ 200 mA: 1.2 volts

## ELECTRICAL CHARACTERISTICS @ 25°C

MICRO TYPE NUMBER Note 1	NOMINAL ZENER VOLTAGE (Note 2 & 5)		MAXIMUM ZENER IMPEDANCE Note 3			MAXIMUM RATED ZENER CURRENT @ 100°C	TYPICAL TEMP. COEF. OF ZENER VOLTAGE	MAXIMUM SURGE CURRENT I <sub>s</sub>
	V <sub>Z</sub> @ I <sub>ZT</sub>		Z <sub>ZT</sub> @ I <sub>ZT</sub>	Z <sub>ZK</sub> @ I <sub>ZK</sub>		I <sub>ZM</sub>		
	VOLTS	mA	OHMS	OHMS	mA	mA		
1EZ110D5	110	2.3	570	5200	0.25	8.3	+0.095	0.15
1EZ120D5	120	2.0	710	5800	0.25	8.0	+0.095	0.14
1EZ130D5	130	1.9	910	6500	0.25	6.9	+0.095	0.13
1EZ140D5	140	1.8	1100	7000	0.25	6.5	+0.095	0.12
1EZ150D5	150	1.7	1300	7500	0.25	5.7	+0.095	0.12
1EZ160D5	160	1.6	1400	8000	0.25	5.4	+0.095	0.11
1EZ170D5	170	1.5	1450	8500	0.25	5.2	+0.095	0.10
1EZ180D5	180	1.4	1500	9000	0.25	4.9	+0.095	0.10
1EZ190D5	190	1.3	1700	9500	0.25	4.7	+0.095	0.10
1EZ200D5	200	1.2	1900	10000	0.25	4.6	+0.100	0.10

**NOTE 1** Suffix 5 indicates ± 5% tolerance. Suffix 10 indicates ± 10%, no suffix indicates ± 20%. Also, Suffix 1 indicates ± 1%, 2nd suffix 2 indicates ± 2% on V<sub>Z</sub> tolerance.


**NOTE 2** Zener Voltage (V<sub>Z</sub>) is measured in still air at a temperature of 25°C. The test currents (I<sub>ZT</sub>) have been selected so that at nominal voltages the dissipation is a constant 0.25 watts. This results in a nominal junction temperature rise of 10°C.

**NOTE 3** The Zener impedance is derived from the 60 Hz ac voltage, which results when an ac current having an rms value equal to 10% of the DC zener current (I<sub>ZT</sub> or I<sub>ZK</sub>) is superimposed on I<sub>ZT</sub> or I<sub>ZK</sub>.

**NOTE 4** Maximum Surge Current is a non recurrent maximum peak reverse surge with a pulse width of 8.3 milliseconds at T<sub>A</sub> 25°C (+8, -2°C).

**NOTE 5** Voltage measurements to be performed 90 seconds after application of DC current.

## SILICON 1 WATT ZENER DIODE

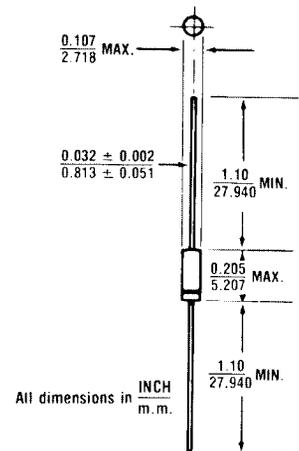

All dimensions in INCH  
m.m.

FIGURE 1

## MECHANICAL CHARACTERISTICS

CASE: Molded encapsulation, axial lead package (Case J).

FINISH: Corrosion resistant. Leads are solderable.



THERMAL RESISTANCE: 75°C/Watt.

POLARITY: Banded end is cathode.

WEIGHT: 0.4 grams (Typical).

# 1EZ110D5 THRU 1EZ200D5

**NOTE 6** Glass devices ordered by replacing E in the series type number with G.  
Example: 1GZ110D5

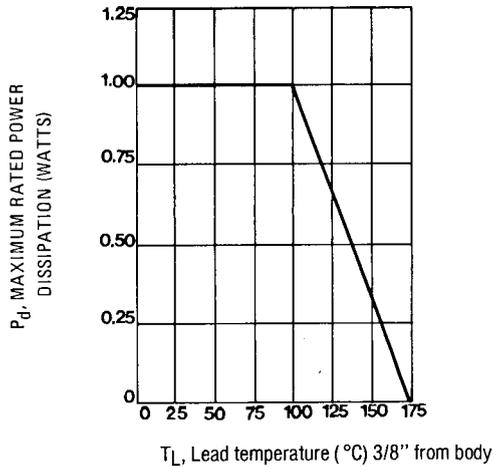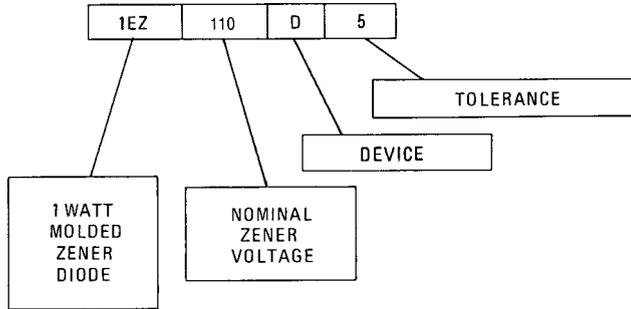

**FIGURE 2** POWER DERATING CURVE