

SHORT-WAVE STATION LIST

MONTHLY
ONE SHILLING

The
**Wireless
World**


*COVERING
EVERY WIRELESS INTEREST*

OCTOBER 1941



VELOCITY-MODULATED VALVES: Klystron Centimetre-wave Generator

FREQUENTITE

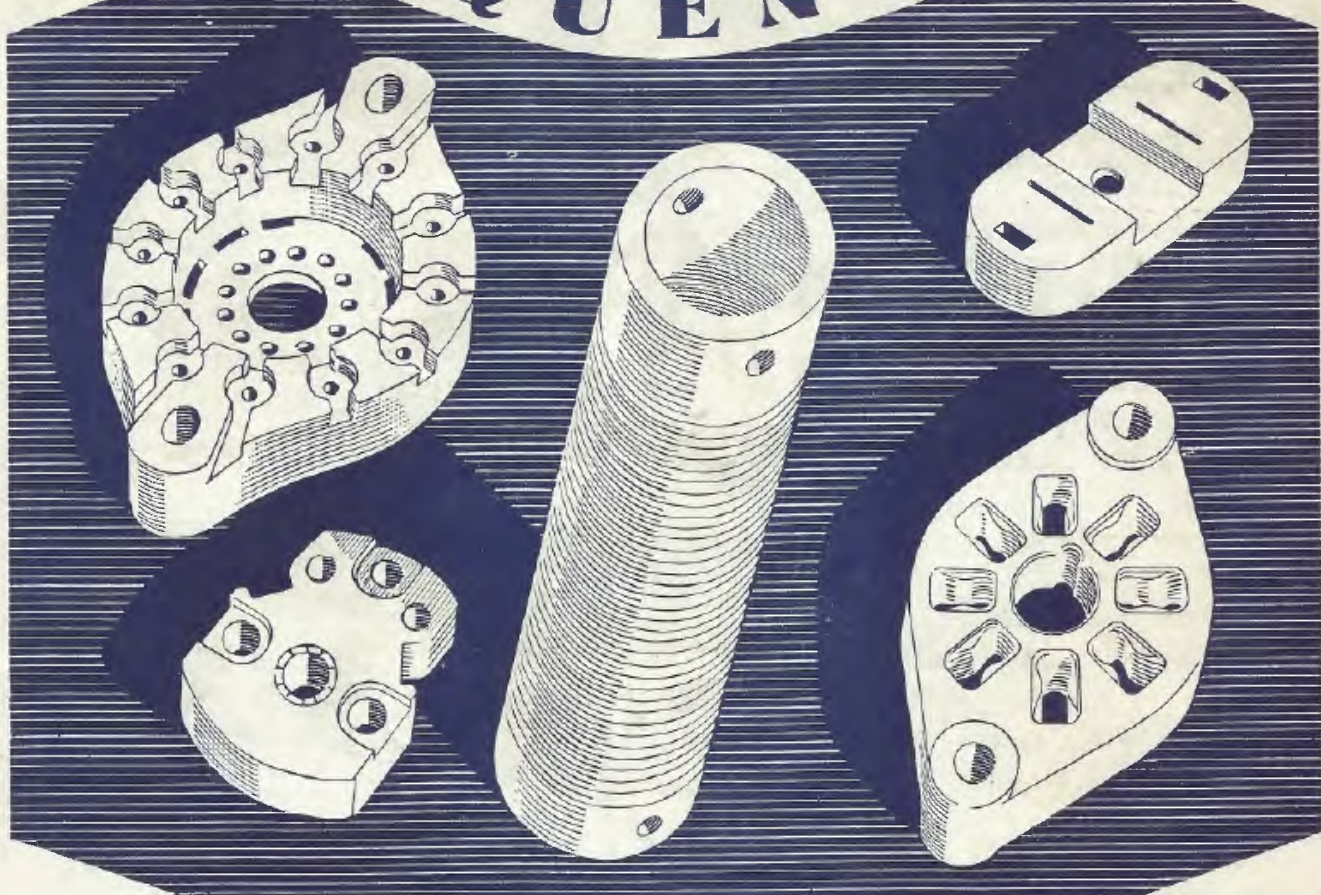

THE PIONEER BRITISH-MADE LOW LOSS CERAMIC

THE DEMAND for Frequentite, which possesses outstanding properties of Low Loss and High Mechanical Strength, continues to increase rapidly—and to be met. Production capacity has been stepped up over a period of years by extensions to plant, the employment of

specialised new equipment, and progressive improvements in manufacturing technique. Bulk supplies of the most intricate designs can be delivered promptly, and all manufacturers are invited to write for Catalogue No. S.P.10.


STEATITE & PORCELAIN PRODUCTS LTD.

Telephone : Stourport 111.

Head Office :
STOURPORT-ON-SEVERN, WORCS.

Telegrams : Steatite, Stourport.


SP.4

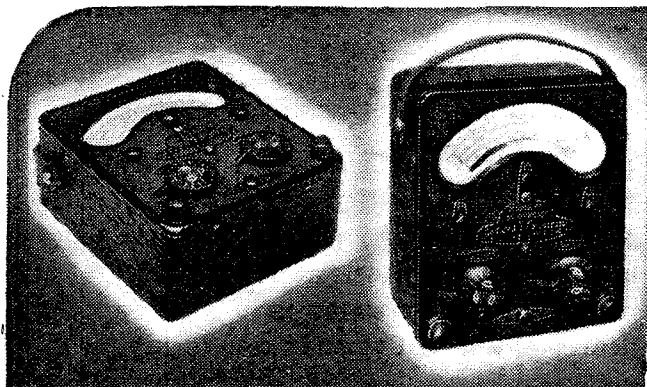

46-range Model 7
Universal AvoMeter



40-range Model 40
Universal AvoMeter

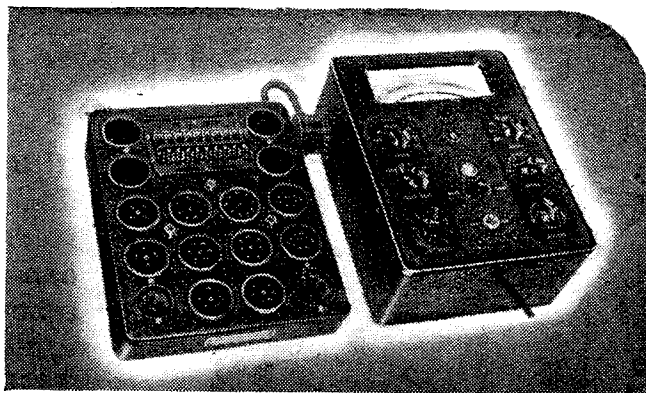

'Avo' Valve Tester with Universal Panel

PRECISION METERS

that Master every Testing Problem

The world-wide use of "AVO" Instruments is striking testimony to their outstanding versatility, precision and reliability. In every sphere of electrical test work—laboratory, shop or out on a job—they are appreciated for their dependable accuracy, which is often used as a standard by which other instruments are judged. There is an "AVO" Instrument for every essential electrical test.

Some delay in delivery of Trade Orders is inevitable but we shall continue to do our best to fulfil your requirements as promptly as possible.



ELECTRICAL MEASURING INSTRUMENTS

BRITISH MADE

● Write for fully descriptive literature dealing with any instrument in which you are interested, and for current prices.

Sole Proprietors and Manufacturers:—

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT Co., Ltd., Winder House, Douglas St., London, S.W.1



Phone: Victoria 3404-7.

All-Wave "Avo" Oscillator


"Avo" Test Bridge

Universal AvoMinor

D.C. AvoMinor

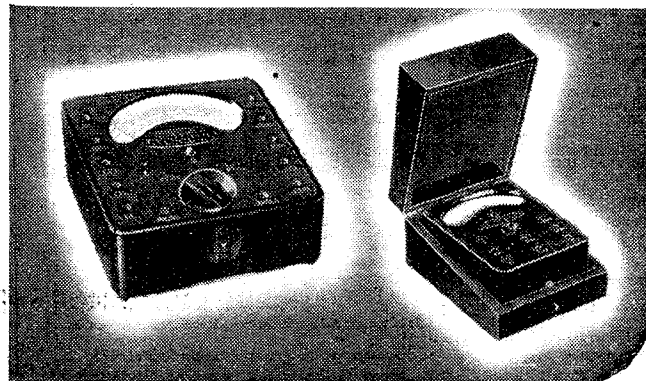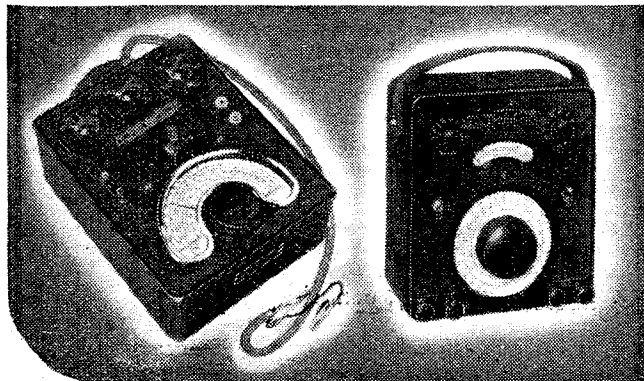

Quicker and Better than a Re-wind

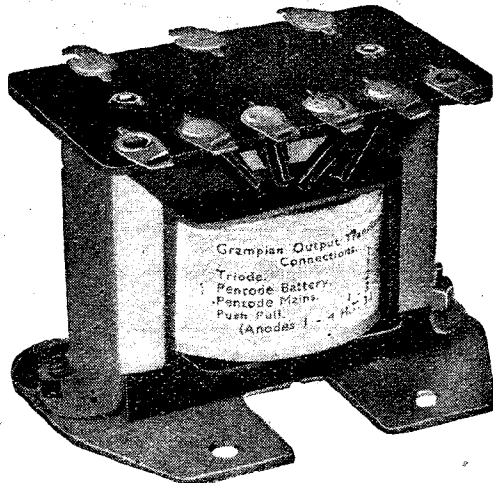

All this is prompted by the desire to help dealers, by ensuring that every Unit is as reliable as human skill, and experience can make it. A component which enables you adequately to cope with the multiplicity of Valve Types in use today.

Here is a pedigree component which is available at less than re-wind cost. 6/- each. Conveniently packed. Display box of 6 from all Factors and Wholesalers.

The new Grampian All-ratio Output Transformer provides 8 Ratios to suit any standard speech coil impedance. Tapped primary and secondary ensure more exact matching than any other similar model. Primary is tapped for Triode, Battery, Pentode. Mains Pentode and Push-pull Output. Secondary is tapped for 2 ohms and 9 ohms speech coil. Universal fixing plate.

GRAMPIAN REPRODUCERS LIMITED
KEW GARDENS, SURREY ————— Phone: RICHMOND. 1175/6/7

M.R. SUPPLIES

much regret that, through shortage of staff and the indisposition of Mr. Rogers, they were unable to make their usual announcement in this journal last month. We very much appreciate many solicitous enquiries. We can now make immediate delivery of—
ROTHERMEL-BRUSH PIEZO-CRYSTAL MICROPHONES, Bullet type, complete with socket connector. Fine black crystalline finished metal housing with polished black bezel and dull-plated connector, supplied with lead, ready for use. Response 50-6,000 c/s. Out/put level—60db. Brand new, 62/6.

ROTHERMEL-BRUSH SOUND-CELL CRYSTAL MICROPHONES, Model B1. 25 only of this specially fine model, at 45 17s. 6d. each. Immediate application essential.

G.E.C. LAPPEL TYPE TRANSVERSE CURRENT MICROPHONES, Model 1574. A precision instrument of high performance within small compass, only 1½ in. square. Complete 44 5s., microphone with lead and connector, at 39 6. Very few left.

BRUSH PIEZO-CRYSTAL ELEMENTS, for construction of contact or ordinary microphone, tweeter, piano-repeater, etc. Scientifically interesting and useful. 2½ in. dia. fitted stylus, 6/11. Many hundreds in use.

ROTHERMEL STANDARD PIEZO-CRYSTAL PICKUP CARTRIDGES, to fit S.S. de Luxe and all models of Rothermel Pickup (except 1940 Junior). With the virtual cessation of supplies of pickups this fortunate delivery enables one to renovate existing pickup or make replacement head for Garrard or Collaro record player. Maker-guaranteed 23/6, fitted needle screw.

CONDENSER PACKS. Most useful ratings. Dubilier, 12×12×4×2 mf., 360 v. D.C. wkg., 7/6. N.S.F. (or Hunts) 16×16×16 mf., 490/350 v. wkg., 7/6.

CADMIUM STEEL SET or AMPLIFIER CHASSIS, very heavy gauge, drilled for 5 valves and usual components, size 14½ in. by 7½ in. Sent only in minimum lots of 4 chassis for 11/6. Post paid.

ROTHERMEL NEW JUNIOR PIEZO-CRYSTAL PICKUPS, performance equal to other well-known models (no longer available) but less expensive arm and swivel assembly. Really an opportunity and fully recommended, 28/6 (incl. P.T.A.).

ELECTRIC SOLDERING IRONS. We are glad to announce these high-class models, just arrived. Domestic, 75-watt, 250/250 v., 10/-. Professional models, same wattage and voltage, fitted 3-core cable, with everlasting and completely air-tight element, and every possible refinement, 15/-. and special manufacturers' "spoon-plier" model, 37/-. We offer you the best only.

REDUCTION GEAR MOTORS. 200/250 v. A.C. Final speed 3 r.p.m. at very high torque. Precision instruments of small dimensions, invaluable in research depts., etc., 27/6. Also a few of the same motors, fully enclosed and fitted 5 in. turntable and mains lead and plug, 35/-.

ELECTRO-MAGNETIC COUNTERS. 500-ohms coil, counting up to 9,999. Operating from 20 v. D.C. or up to 240 v. A.C. Many industrial and domestic applications. (S.H. ex G.P.O., all perfect), 5/6.

L.T. METAL RECTIFIERS (Prominent British make), D.C. delivery 12/14 v. at 11 amps., 10/9. Also D.C. delivery 12/14 v. at 6 amps., 33/6. And D.C. delivery 12/14 v. at 10 amps., 45/-. Step-down MAINS TRANSFORMERS to suit, prim. 200/250 v. for use with 10/9 rectifier, 12/6. For use with 33/6 rectifier, 37/6. (Slight increases in prices unavoidable and regretted). Note.—We have to charge 1/9 each for packing and despatch of 6 and 10-amp. rectifier and 6-amp. transformer).

SLIDING RHEOSTATS, fully enclosed, first-class construction. 4-ohms 5-amps., 10-ohms 3 amps., 50-ohms 1.4 amps., 100-ohms 1 amp., 200-ohms .7 amp., 400-ohms .5 amp., either 15/6.

MORSE KEYS, Govt. patt., as supplied by us to A.T.C., R. Signals, R.A.F., etc., adjustable plated action on baseboard, 8/11.

Delivery made by return (except in unforeseen circumstances) and satisfaction assured.

M.R. SUPPLIES, 68, New Oxford St., London, W.C.1

Telephone: MUSEum 2958

RADIO DESIGNER'S HANDBOOK

A Comprehensive Manual for Radio Engineers and Experimenters

Edited by F. Langford Smith, B.Sc., A.M.I.E.E.

This handbook is a complete collection of all the principal formulæ involved in the design of receivers and components. The eight sections of the book deal with Audio Frequencies; Radio Frequencies; Rectification; Filtering and Hum; Receiver Components; Tests and Measurements; Valve Characteristics; General Theory; Sundry Data.



Full explanations are given of the way the principles are applied and each chapter gives a list of works dealing with the particular subject.

Size 8½ × 5½ inches, 352 pages with numerous diagrams and charts. Cloth boards

Price 8/6 net. By post 9/1


ILIFFE & SONS LTD.

Dorset House, Stamford Street, London, S.E.1

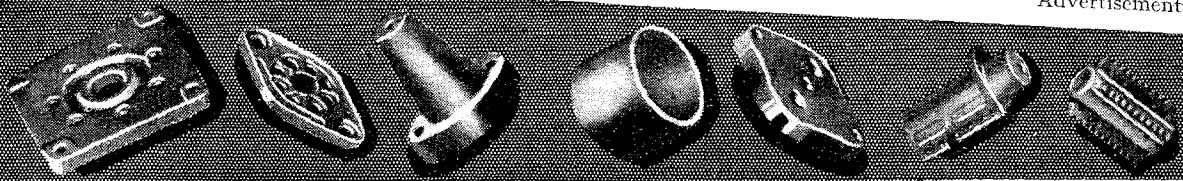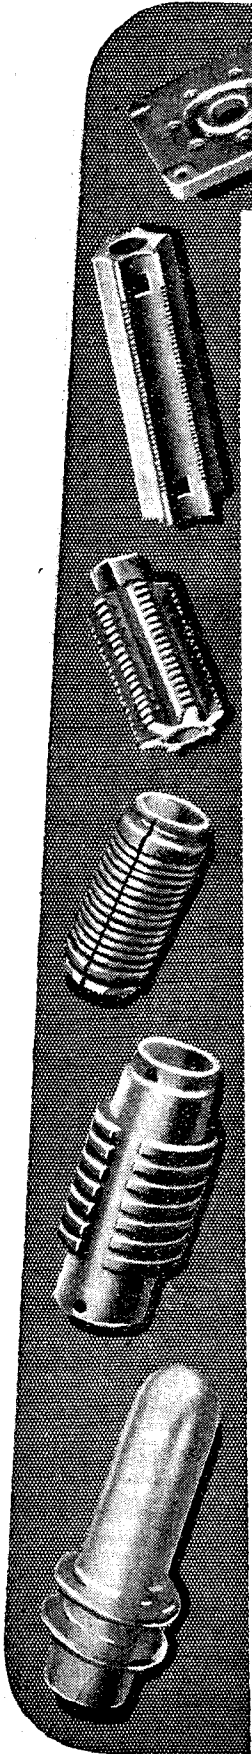

Going one better

IN COMMUNICATIONS

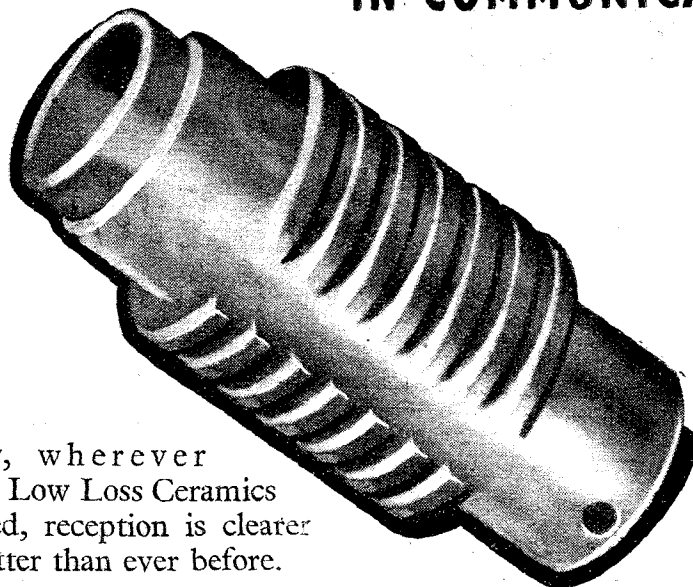

To-day, wherever Bullers Low Loss Ceramics are used, reception is clearer and better than ever before.

Years of research in Bullers Laboratories have developed these materials to such a high level of efficiency that Dielectric Loss is virtually eliminated. Bullers Ceramics are now playing a vital part in maintaining communications under all conditions.

Made in Three Principal Materials :

FREQUELEX. An Insulating material of Low Dielectric Loss. For Coil Formers, Aerial Insulators, Valve Holders, etc.

PERMALEX. A High Permittivity Material. For the construction of Condensers of the smallest possible dimensions.

TEMPALEX. A material of medium permittivity of Condensers having a constant capacity at all temperatures.

BULLERS LIMITED
 THE HALL, OATLANDS DRIVE, WEYBRIDGE, SURREY
 Telephone : Walton-on-Thames 2451
 Manchester Office : 196 Deansgate, Manchester

Bullers

LOW LOSS CERAMICS



The Pioneers of Low Loss Ceramics

MANUFACTURERS OF —

SILVERED MICA CONDENSERS
SILVERED CERAMIC CONDENSERS
CERAMIC TRIMMER CONDENSERS

WRITE FOR BROCHURE



ON A.I.D. APPROVED LIST


UNITED INSULATOR CO. LTD.

12-16, LAYSTALL ST LONDON, E.C.1.

Telephone: TERMINUS 4118-9 Telegrams: CALANEL SMITH, LONDON.

A.V.C.

from grid or anode bend detectors

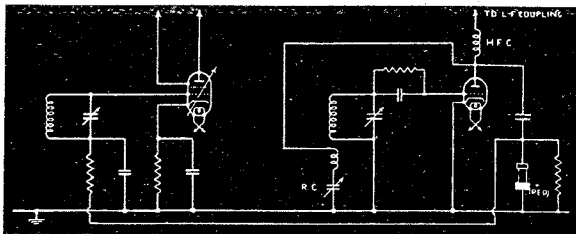

The circuit shows how the H.F. component in the anode circuit of a detector valve may be used, after rectification by means of a Westector, to provide the D.C. voltage for A.V.C., as well as for reaction. Full details of this, and other methods of obtaining A.V.C., are given in "The All Metal Way."

Westinghouse

WESTINGHOUSE BRAKE & SIGNAL CO., LTD.,
 Peck Hill House, Chippenham, Wilts.

Enclose 3d. in stamps. Please send me "The All Metal Way."

NAME

ADDRESS

w.w.1041

SECOND EDITION—REVISED

RADIO LABORATORY HANDBOOK

By M. G. SCROGGIE, B.Sc., A.M.I.E.E.
 issued in conjunction with "The Wireless World"

401 pp.

219
 illustrations
 and
 diagrams

PRICE
 10/6 net

By post 11/1

This practical and reliable handbook, the only one of its kind, gives complete information about laboratory equipment, and the correct methods of working.

The new edition has been extensively revised, and many important additions have been made. Q-meters, crystal-controlled frequency calibrators, and double-beam cathode ray tubes have been included.

There is also a collection of the most useful formulæ, symbols and abbreviations, with tabular and other data.

A complete index, numbered sections and cross references enable the reader to find what is required without loss of time.

From Bookstalls and Booksellers or direct from the Publishers

ILIFFE & SONS LTD., Dorset House, Stamford St., London, S.E.1



Exide BATTERIES

'Still keep going when the rest have stopped'

THE CHLORIDE ELECTRICAL STORAGE COMPANY LTD.

Grosvenor Gardens House, Grosvenor Gardens, London, S.W.1.


Telephone : VICtoria 2299. Telegrams : Chloridic, Sowest, London

COSSOR CATHODE RAY COMPLETE TELEVISION EQUIPMENT

THE DEMAND HAS BEEN SO GREAT for this equipment that all separate components have been sold. We can still offer, however, the apparatus complete with C.R. Tube, in Cabinets as mentioned below. It can be adapted to a variety of purposes, including Oscilloscopes and those interested in Research and Development should not miss this opportunity, as such apparatus is no longer obtainable through normal channels.

Complete Sound and Vision Equipment as illustrated, with C.R. Tube type 3244, diameter approx. 6in., complete in Walnut Table Cabinet (12in. x 21in. x 16½in.). Carr. fwd., plus 2/6 packing ... **£17**

As above, but with C.R. Tube type 3221, diameter approx. 7½in., complete in Walnut Pedestal Cabinet (15in. x 20in. x 36in.). Carr. fwd., plus 2/6 packing ... **£18.50**

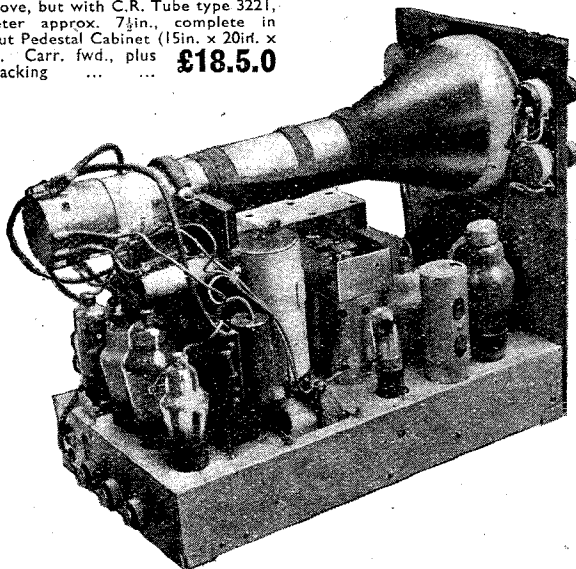

Further exceptional offers of Cathode Ray and Radio Equipment.

POWER PACK & AMPLIFIER CHASSIS. Includes heavy mains transformer 350-0-350, 120 m.a. with 4 tappings. High voltage transformer for supplying C.R. Tube. Various condensers including 16 x 16 mfd. 550 v. working, 1-16 mfd. 450 v. working, 50 x 50 x 2 mfd. B.I. Electrolytics, etc. Pentode output transformer; chokes; resistors; trimmers; bias electrolytics; mica and tubular condensers; short-wave coils, etc. The quality of the workmanship and components is of the highest class. Valve diagram free ... **67/6**
Carr. fwd. Add 2/6 for packing.

TIME BASE CHASSIS. For 8in. Cathode Ray Tube. Well-made cadmium-plated chassis, size 17in. x 14½in. x 2in., containing approximately thirteen fixed resistors ranging from 15,000 ohms to 1 megohm, five variable resistors, 2,000 to 20,000 ohms, approximately 14 various tubular and electrolytic condensers, also sundry focus and scanning coils and chokes. (Complete circuit and service manual available, price 6d. each.) Carr. fwd. Add 2/6 for packing. **30/-**

CATHODE RAY TUBES (MAGNETIC TYPE). Not available through ordinary channels. 10in. £5, 12in. £6, 15in. £8. All tubes must be collected by buyer.

EA50 TELEVISION DIODES. 6.3 v., 0.15 amp. Limits: Vd. max. 50 v., Id. max. 5.0 m.a., Vd. max. (Id. = plus 0.3 µa) — 1.3 v., Vfk. max. 50 v., Rfk., max. 20,000 ohms... **10/6**

VISION UNITS. To fit on Time Base. Consists of 3 Mullard T.S.E.4 and 1 Mazda DI Valves. Approximately 25 resistors ranging from 75-75,000 ohms, about 30 condensers of various values, together with Rejector, Grid and various Band Pass Coils, also approximately 10 chokes of various descriptions and W6 Westector. Completely wired and screened. (Complete circuit and service manual available, price 6d. each.) Post and packing 1/6 **40/-**

MAINS TRANSFORMERS. Originally made for Television Power Packs where accuracy and robustness are essential. Weight 12lb., size 5½in. x 4½in. overall. 350-0-350 v. 120 m.a. Tapped. 4 v. 2 a.; 4 v. 8 a.; 3 v. 3 a.; 20 v. 1 a. Diagram free. **25/-**
Post and packing 1/6

HEAVY DUTY MAINS TRANSFORMER. Input 240 v. A.C. One tapping at approx. 5,000 v. max. 20 amp., and one for supplying filament of Mullard HVR 2 (6.3 v. at .65 amp.) Shrouded in metal box, carr. fwd. **10/6**

Also input 200-250 v. A.C., approx. 6,500 volts. Shrouded in metal box. Carr. fwd. **20/-**

B.I. CONDENSERS. .1 x .1 mfd. 7,000 volt d.c. test with porcelain insulators ... **20/-**

4-VALVE 5-WATT AMPLIFIER CHASSIS for 220-250 A.C. Shock-proof chassis, 2 triodes output stage with super 10in. energised M/C speaker, special output transformer and volume control. Complete. Carr. and packing 2/6 extra ... **6GNS.**

See our Miscellaneous Advertisement (page 16) for other interesting items.

LONDON CENTRAL RADIO STORES
23, LISLE STREET, LONDON, W.C.2. Phone: GERrard 2969

Links in the chain of Success

IN radio communication and in most electrical and scientific apparatus, with or without cathode ray tubes, "Belling-Lee" accessories are widely used. The firm enjoys an enviable reputation for resourcefulness in design and manufacture of small parts, including terminals, plugs and sockets, fuses, fuseholders, valveholders, etc. Belling & Lee Ltd. are acknowledged specialists in suppression appliances, anti-interference aerials, screened rooms, etc. Have you read "The Suppression of Electrical Interference" (3/9 post free), recognised as an authoritative work on the subject?

BELLING & LEE LTD
CAMBRIDGE ARTERIAL ROAD, ENFIELD, MIDDX


RAYMART

CRAFT A CREED

CONDENSERS AND DIALS


Our range of Micro-Variable Condensers and Precision Dials has, owing to heavy demands, been considerably increased. All have features not found in competitive makes. In the case of the Condensers—heavy all brass construction, ball-bearing spindle (electrically shorted) Ceramic (RMX) insulation, smooth operation with freedom from end or side play. The Dials are noted for their fine appearance, accurate workmanship, and non-reflecting satin finish, graduations being deeply engraved and clear and easy to read. In addition a range of Knobs both skirt and otherwise to match these Dials are available. Full description of these instruments are available on receipt of a stamped addressed envelope.

STANDARD (VCX) SERIES CONDENSERS




VCX


The VCX series condenser can be mounted by means of the three holes where both rotor and stator are required to be insulated from panel.

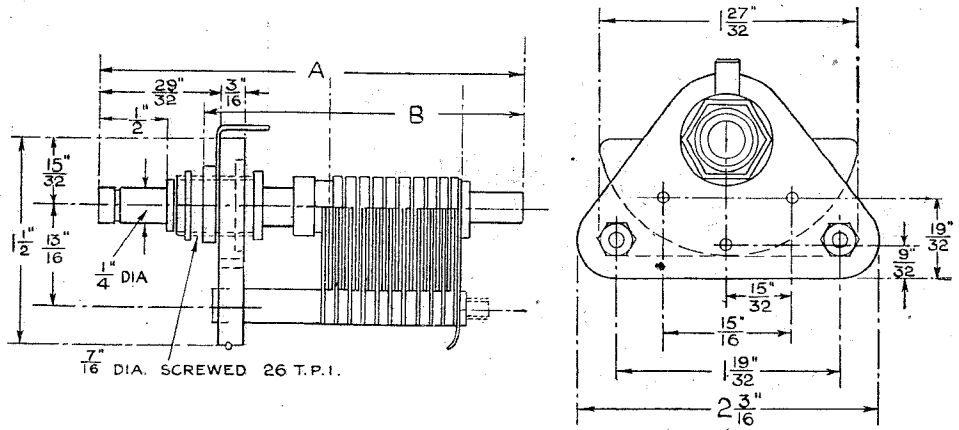

MIDGET (MCX) SERIES CONDENSERS




MCX

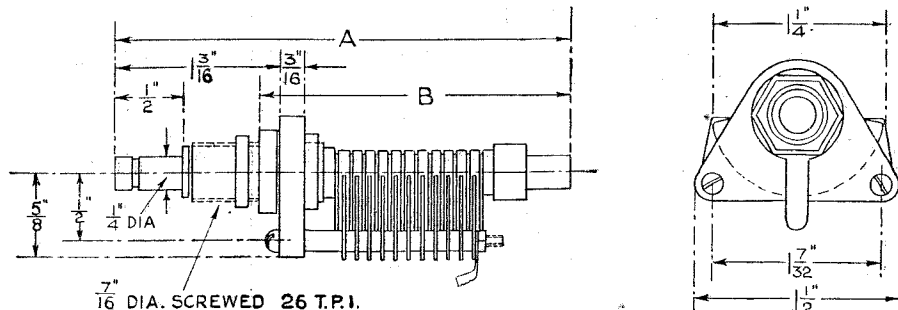

Special condensers can be made with intermediate capacities. The ganging feature may also be omitted with a consequent saving in length. Such alterations, however, can only be considered where the quantity justifies the resetting of machines to make the special parts required.

PRECISION DIALS AND KNOBS

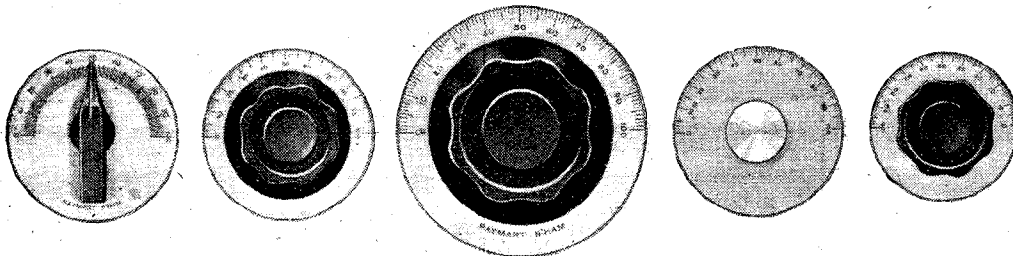


Our range of specialised short wave and communication equipment is the most comprehensive manufactured in this country.

Every necessary component for the construction of short and ultra-short wave Transmitters, Receivers, Oscillators and other scientific instruments are available. Your enquiries are solicited. To assist us in living up to our reputation for reliable service, please place orders well ahead of desired delivery dates.


RAYMART

CRAFT A CREED

44 & 48, HOLLOWAY HEAD, BIRMINGHAM, 1. Phone: MIDLAND 3254

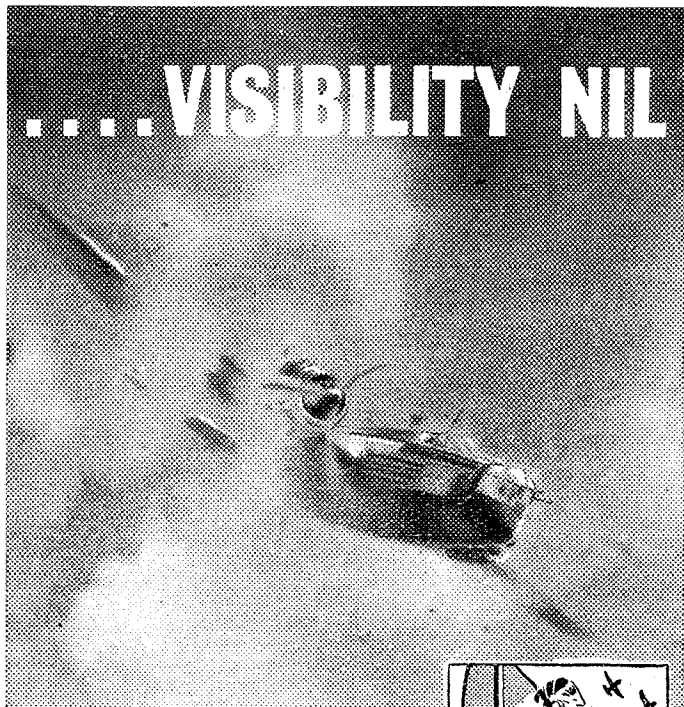

Thank goodness for the **radio/wireless mechanics** at base



For hours before the raid the Radio/Wireless Mechanics at the base were checking and testing the radio gear—putting the last ounce of performance in the wonderful R.A.F. transmitters. Men are urgently wanted for this highly important and intensely interesting job. If you've a sound elementary education the R.A.F. will train you from the start. (Age 18-34—older men accepted if they know something about radio.) **ALSO NEEDED URGENTLY**—men to train as Flight Mechanics (age 18-42), Armourers (age 18-42), Electricians (age 18-42).

Go to-day to the R.A.F. section of the nearest Combined Recruiting Centre (address from any Employment Exchange) or post the coupon.

Train with the
RAF
for these vital ground duties

To Air Ministry Information Bureau, Kingsway, London, W.C.2

Please send me latest details of

- Radio/Wireless Mechanics
- Flight Mechanics
- Armourers Electricians

X against the one in which you are interested.

NAME.....

ADDRESS.....

TT 15—Oct.

ADDRESS YOUR STAFF THROUGH A CELESTION LOUDSPEAKER

with a volume sufficient to overcome local noise

The same speaker will carry music to your staff—true music, not just a volume of sound

The Celestion method of suspension enables the sound to be directed wherever you want it

Standard Model, 6 watts input. Cadmium plated and sprayed battleship grey

CELESTION LTD
Kingston-upon-Thames, Surrey
Telephone: KINGston 5656-7-8

FOR THAT INDOOR P.A. JOB (and especially for speech)

Use your **VOIGT LOUDSPEAKER UNIT** with one of our 2 ft. mouth horns. It dismantles easily for transport and storage. (Quick delivery)

Price - £4 - 16 - 3 (ex works)
UNIT WITH TWIN DIAPHRAGM £15 - 15 - 0

about 40 watts required for full excitation (some delivery delay)

VOIGT PATENTS LIMITED
THE COURTS, SILVERDALE, SYDENHAM, S.E.26
Telephone: 81 Denham 6600.

The A.B.C. of RADIO CIRCUITS

Takes the superheterodyne circuit step by step and deals with it in a practical manner, enabling the beginner in radio to identify and isolate the various parts which make up the whole. Component values are given wherever possible. It is ideally suitable for recruits to radio service work, students of radio engineering at technical colleges and trainees in radio for the Services. By W. E. Miller, B.A. (Cantab.), M. Brit. I.R.E.

PRICE 3/6 (POST FREE 3/9)

THE WIRELESS & ELECTRICAL TRADER
Dorset House, Stamford Street, London, S.E.1



USED

WHEREVER DEPENDABILITY
IS VITAL

DAGENITE

and


PERTRIX

BATTERIES

FOR RADIO, CARS,

MOTOR CYCLES AND COMMERCIAL VEHICLES

You, too, should use Dagenite and Pertrix
—the Dependable Batteries

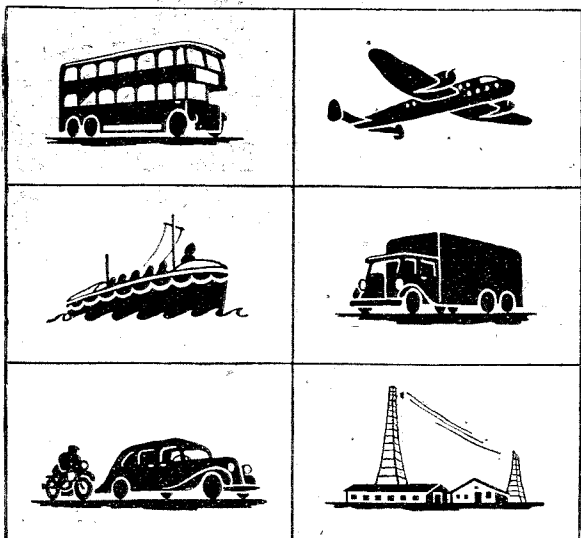

OBTAINABLE FROM HOLSUN SERVICE STATIONS
AND USUAL DEALERS.

Sales Concessionaires:

HOLSUN BATTERIES LIMITED
137, Victoria Street, London, S.W.1

EDDYSTONE



COMPONENTS
immediately available

1. Energetic Production
Though Eddy-stone products have been difficult to obtain, a limited number of components are available to experimenters. Further items are being added as quickly as possible consistent with our ability to maintain Eddystone quality.

2.

3.

4.

I. NEW TYPE MICRODENSERS.

Catalogue No.	mmfd.	Capacity		D/C Flash-over voltage
		min. mmfd.	max. mmfd.	
1094	*18	3	18	3,500
1129	*40	3.8	40	2,300
1093	*60	4	59.5	2,300
1130	100	4.5	100.5	1,000
1131	160	4.75	161	1,000

* high voltage type

2. INSULATED FLEXIBLE COUPLER. Diameter 1 1/4" for 1/2" spindle. Cat. No. 1009.

3. AIR DIELECTRIC TRIMMER. Designed for use with I.F. Transformers. Minimum capacity, 3 mmfd. Maximum, 65 mmfd.

4. SHORT WAVE H.F. CHOKES. Four types available, including Cat. No. 1010, D.C. resistance 22 ohms. Inductance 1-25 millihenries. 5-180 metres.

EDDYSTONE "358"
Communications Receiver

(Available only against Priority Orders)

Specially designed for the reception of telegraphy and telephony signals. A ruggedly built precision instrument incorporating every advanced detail. Frequency range : 31 Mc/s to 90 K/cs. See complete technical specification in July issue "Electronic Engineering," or write for free reprint of same.

WEBB'S RADIO

14, SOHO STREET, OXFORD STREET, LONDON, W.1
Open 9 a.m.—6 p.m. Sats. 1 p.m. Tele. GERrard 2089



Check the Vital Spots
 Constant improvement* keeps Eimac 450T consistently better

Straight, solid, tungsten-bar plate lead...all round corners...no feather edges eliminates possibility of corona. This is an important factor in UHF.

Patented spring-tension filament assembly maintains constant tension on filament...no sagging or warpage...no distortion or short circuits.

Sparkling clear glass bulb gives maximum heat radiation...Eimac's exclusive, patented pumping technique eliminates gas, thus assuring long life.

*Note the clean-cut appearance of the new Eimac 450T tube...see the streamlined cap over the plate and the husky single tungsten-bar plate lead. Notice the new shape of the bulb near plate terminal. These and other improvements have increased its already superior performance capabilities.

EIMAC 450T sets the pace in modern radio

The adoption of Eimac 450T's for use in aircraft ground stations marked the beginning of a long series of sensational successes for these radically designed but soundly conceived vacuum tubes. Today they occupy the key sockets of many of the most important radio transmitters in the world. In fact many of these transmitters are built specifically around the unusual capabilities of the Eimac 450T. Contained in this fact is proof that Eimac 450T tubes are setting the pace in modern radio. Further proof is to be found in that Eimac tubes are the most copied tubes on the market today...their once radical shape is now almost a standard, although their performance has yet to be exactly duplicated. These obvious

truths should mean much to you in the selection of vacuum tubes for your application. Get in touch with the nearest Eimac representative for complete information about the Eimac 450T...or any of twenty odd tube types available.

You'll get greater economy in first cost and in operation from these, the only tubes unconditionally guaranteed against premature failures caused by gas released internally.

Follow the leaders to

Eimac
 TUBES

EITEL-McCULLOUGH, INC. • SAN BRUNO, CALIFORNIA
 Agentes Exportadores: Frator & Co., Ltd., 301 Clay Street, San Francisco, California, E. U. A.

The Wireless World

31st
Year of Publication
Covering Every Wireless Interest

OCTOBER 1941

Proprietors :
ILIFFE & SONS LTD.

Editor :
HUGH S. POCOCK.

Editorial, Advertising
and Publishing Offices:

DORSET HOUSE,
STAMFORD STREET,
LONDON, S.E. 1.

Telephone :
Waterloo 3333 (35 lines)
Telegrams :
"Ethaworld, Sedist, London."

△

**PUBLISHED
MONTHLY**

Price : One Shilling

(Publication date 20th
of preceding month)

Subscription Rates
Home and Abroad
14/- per annum

EDITORIAL	247
VELOCITY-MODULATED VALVES	248
FUTURE OF EUROPEAN BROADCASTING	252
ELECTROLYTIC CONDENSER TEST SET, By F. A. Boyer, B.Sc.(Lond.)	254
ELECTROSURGERY (concluded). By A. W. Lay, F.Inst. P.	256
THE WORLD OF WIRELESS	258
NEWS IN ENGLISH FROM ABROAD	260
DESIGNING A MODERN SUPERHETERODYNE (concluded). By R. G. D. Holmes, A.M.I.E.E.	261
SHORT-WAVE BROADCASTING STATIONS	263
SERVICING EQUIPMENT AND ITS USES. Part IV. By "Service"	265
LETTERS TO THE EDITOR	268
RANDOM RADIATIONS. By "Diallist"	270
RECENT INVENTIONS	272
UNBIASED. By Free Grid.	274

Branch Offices :

COVENTRY :
8-10, Corporation Street.
Telephone : Coventry 5210.
Telegrams : "Autocar, Coventry."

BIRMINGHAM :
Guildhall Buildings,
Navigation Street, 2.
Telephone :
Midland 2971 (5 lines).
Telegrams :
"Autopress, Birmingham."

MANCHESTER :
260, Deansgate, 3.
Telephone :
Blackfriars 4472 (4 lines).
Telegrams :
"Iliffe, Manchester."
GLASGOW :
26B, Renfield Street, C.2.
Telephone : Central 4857.
Telegrams : "Iliffe, Glasgow."

△

As many of the circuits and apparatus described in these pages are covered by patents, readers are advised before making use of them, to satisfy themselves that they would not be infringing patents.


Masteradio

VIBRATOR PACKS

British Made Equivalents Of All American Types Plus The New Patented Silent Surge Circuit

EFFICIENT PORTABLE POWER


THE PORTABLE POWER SUPPLY FOR RADIO TRANSMITTERS AND RECEIVERS.
PUBLIC ADDRESS SYSTEMS.
SCIENTIFIC APPARATUS.
EMERGENCY POWER SUPPLY SYSTEMS.

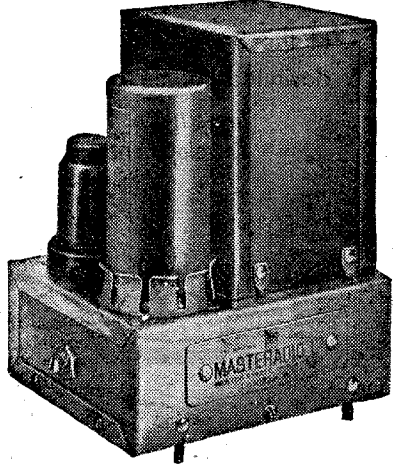

Write for details :—**MASTERADIO LTD.**
VIBRANT WORKS, WATFORD, Herts.
Grams : MASTIOLA. Phone : WATFORD 9885/9890.

Greenwood

There is practically no assembly which Speed Nuts cannot improve

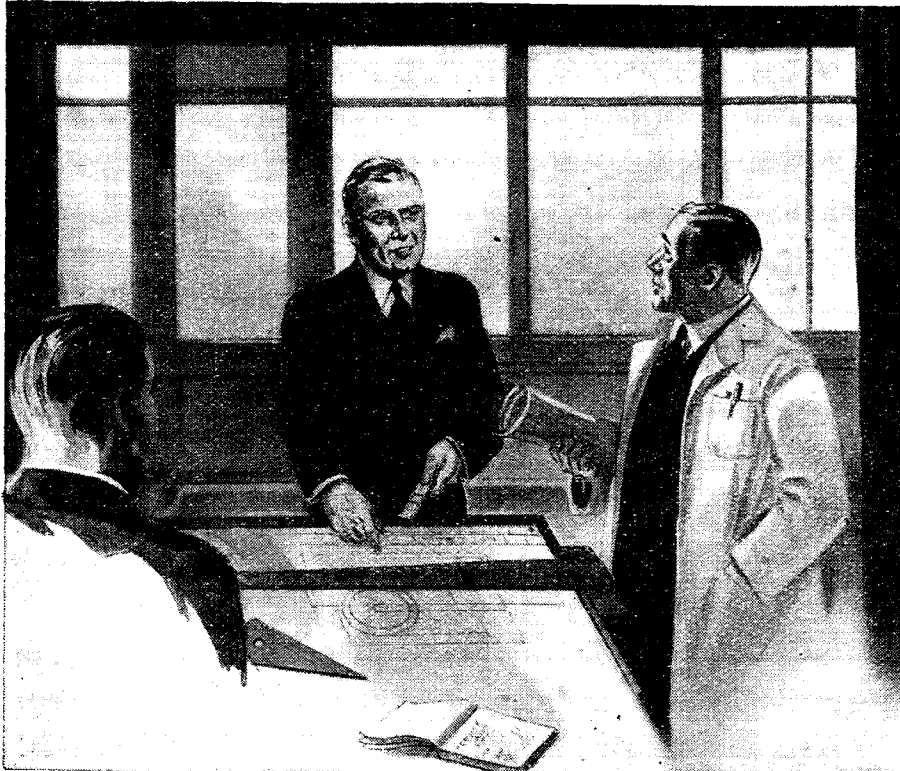


Leading manufacturers everywhere have proved the efficiency of Simmonds Speed Nuts in simplifying and accelerating assembly and effecting considerable savings in costs and material.

Apart from the many standard types available, the unique flexibility of the Speed Nut system makes it possible for special types to be designed to meet particular problems.

Investigate the Simmonds Speed Nut system now. Our Development Department will be pleased to collaborate.

Simmonds
Speed Nuts
(PATENTS APPLIED FOR)

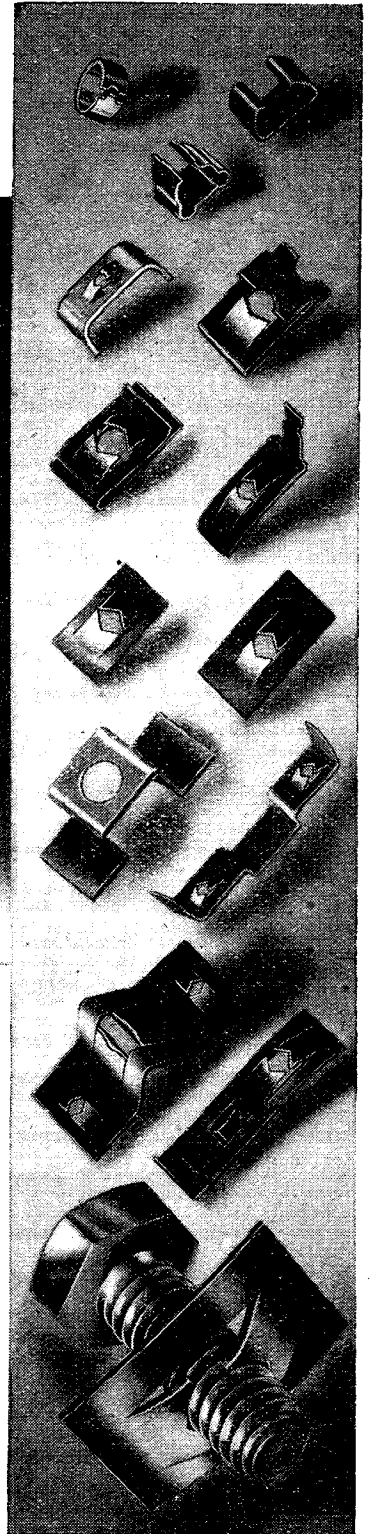

 **SIMMONDS AEROCESSORIES LTD** 
GREAT WEST ROAD, LONDON.

Longleys

The Wireless World

COVERING EVERY
WIRELESS INTEREST

ESTABLISHED
1911

Vol. XLVII. No. 1072

OCTOBER, 1941

Price One Shilling

New-style Jamming

Imagination in Wireless Warfare

WRITING in last month's issue, we urged "fierce and stubborn resistance" to the continual spreading of Nazi broadcast tentacles across Europe. In particular, we supported Capt. Plugge's suggestion for the installation of new propaganda stations in localities more favourable for making the voice of Britain heard over the Continent.

But it is not enough merely to possess the means of putting down a good signal over the vast areas at present dominated by German-controlled broadcasting, where the natural advantages enjoyed by the enemy are such that the best we can do in this respect is far inferior to his own. We must see to it that the best possible use is made of our relatively weaker signals; the matter broadcast must compel attention, and, more important still, imagination must be used in devising technical means of minimising the handicaps under which we labour.

Dr. Goebbels Sees Red

Our Russian allies have given us a lead in both directions. It is hardly the function of this journal to comment on the generally admitted excellence of the Russian propaganda, which, by appealing to the simplest human emotions, must command a far wider audience than matter intended to appeal to the reason. What we are more concerned with is the successfully executed technical artifice which for many days turned Dr. Goebbels into the laughing stock of the whole world. As all readers will know, the Deutschlandsender transmissions for some time suffered from superimposed anti-Nazi interruptions generally believed to be (and, indeed, admitted by Germany to be) of Russian origin. So good technically was the method of superimposition that competent observers in this country thought at

first that means had been found to tap into the modulation circuits of the German transmitter. Later it became evident that radio-frequency methods were being employed. At the time of writing, an apparently effective and, it must be admitted, quite an ingenious but simple antidote seems to have been found by the enemy, but not before an incalculable amount of harm has been done to his cause.

Technical Tactics

Here, surely, is an excellent example of one method of wireless counter-propaganda that lacks none of the elements necessary for undermining a top-heavy regime like that of the Nazis, which, lacking real foundations, must be particularly susceptible to such forms of attack. It solves all the difficulties that lie in the way of making the ordinary German listen to foreign broadcasts. No longer does the lack of sensitivity and selectivity of his *Volksempfänger* give automatic protection to his sensitive Aryan ears against pollution from the outside world. No longer need he fear that the penalties attaching to foreign listening can be applied to him; even Hitler must stop short at beheading millions of listeners.

It is unlikely that any conventional method of distributing wireless counter-propaganda can, in the geographical position occupied by Britain and her Allies, achieve the success that has been achieved by the method of interjection just described. Even if the German antidote to it proves fully effective, there are other means of achieving a similar result, and every possibility, technical and otherwise, must be exploited to the full. Admittedly, an antidote to any method will probably be found, but we must have more than one string to our bow. Wireless warfare must be unrestrained.

Velocity - Modulated Valves

Modern Trends in Tubes for Ultra-high-frequency Operation

IN this article it is proposed to trace the evolution of the velocity-modulated electron tube, commencing with the work of Heil and Heil in 1935.

Without going into the mathematical theory, it might be as well to consider the difference between "intensity modulation" as met with in the conventional valve, and "velocity modulation" as employed in the tubes of Heil and Heil, Hahn and Metcalf, and Varian and Varian.

The normal type of vacuum tube operates by virtue of intensity or current conduction modulation. That is to say, the *intensity* of the continuous current component always present in




Fig. 1. Simplified sketch showing arrangement of electrodes in a velocity-modulated tube. The dotted line represents the electron path.

the valve under operating conditions is modulated or varied by the applied signal. As the term "velocity modulation" implies, the signal is employed to modulate the *speed* of the electrons in the valve.

An important point that should be kept in mind when considering velocity-modulated valves is that before the electron energy can be utilised the electrons have to be converted into an intensity-modulated beam. In other words, velocity modulation is employed because of its natural utility at very high frequencies, but intensity or conduction current modulation has to be introduced in order to make use of the advantages.

In a German article entitled "A New Method of Generating Short, Undamped Electromagnetic Waves of Great Intensity," by A. Arsenjewa Heil and O. Heil, published in *Zeitschrift für Physik*, No. 95, 1935, are given details of a tube which was the forerunner of the modern velocity-modulated types.

Let us, firstly, consider the difficulties which have to be overcome in order to produce any considerable amounts of power at wavelengths in the region of 1 metre down to only a few centimetres. Two main difficulties exist: (1) Transit time considerations, and (2) electrode dimensioning.

The speed of the electrons is of such an order that the time they take to pass from one electrode to another (transit time) is comparable with the period of oscillation of the valve at the high frequencies involved. At the very high frequencies this transit time may even be greater than the oscillation period.

The second snag which is encountered is that, since the tube electrodes form the capacity of the oscillator circuit, they should be kept as small as possible. On the other hand, since heat is generated by energy loss from electrons upon impact, it is necessary to keep the dimensions of the electrodes large in order to dissipate such heat. It would appear from the above remarks that the generation of large amounts of power in the very short-wave region mentioned is quite impossible owing to these conflicting requirements.

Solving the Problems

The type of velocity modulated tube to be described overcomes these seemingly insurmountable difficulties. The underlying principle of operation is that the transit time of the electrons, instead of hindering the operation of the ultra-short-wave generator, is employed to control the electron current. The problems of keeping the capacity of the electrodes small and at the same time dissipating the heat generated by electron impact are solved by not allowing the electrons to impact. That is to say, the electrons do not reach the electrodes, being so directed that they pass through the oscillating electrode, energy being drawn out of the electron stream during this passage.

An idea of the electrode arrangement of the original Heil tube can be obtained from Fig. 1. A is the cathode, B the first accelerating electrode, C an electrode in the form of

an open-ended cylinder, so providing, in effect, a "Faraday cage," and D the second accelerating electrode. Electrode C, being the oscillating electrode, is connected to the oscillatory circuit, as shown in the figure.

The electrode B is at a positive potential with respect to the cathode A. B is also directly connected to D, so that both electrodes are at the same potential with respect to A. The method of collection may be observed from Fig. 2. On the extreme right of the diagram can be seen a set of electrodes E, F, G, H, arranged obliquely with respect to the beam, the electrodes being of plate form with a hole at the centre. It is arranged that the potentials applied to these electrodes are more negative with respect to each other along the direction taken by the stream of electrons.

The operation of this generator is given by the inventors as follows: The electrons comprising the beam are accelerated towards electrode B, which is at a positive potential. As will be realised, on reaching electrode B the electrons will be retarded. After retardation, they pass into the oscillating electrode C. On passing through C they come under the influence of the second accelerating electrode C, which, as already stated, is at the same potential as B, so that once more the electrons are subject to a similar accelerating influence. The emerging electron stream, which is still a velocity-modulated one, will now have to be converted into an intensity-modulated beam by successive retardation in the collecting arrangement depicted in Fig. 2.


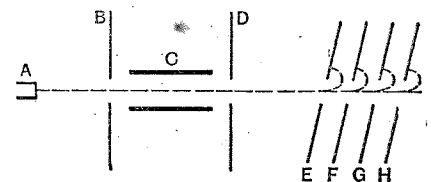


Fig. 2. Illustrating the operation of the tube.

Considering the device as a generator, imagine electrons passing through electrode B to the cage C. These form a current of negative electricity away

from the cage, while the electrons inside the cage act as if they were actually on the metal of which it is composed. So much for the passage of the electrons into the cage. A control for the current is obtained from the length of time which the electrons remain inside the cage, which, of course, depends upon the velocity of the electrons; that is to say, on the potential of the cage at the time of entry.

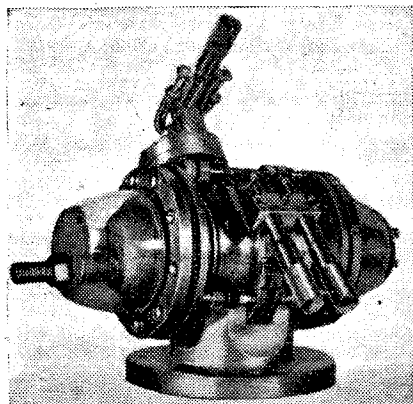

Showing external appearance of a Klystron tube. The adjusting screws are for tuning the rhumbatrons by mechanically deforming them, and so altering their electrical characteristics.

Assuming that the oscillating circuit potential varies sinusoidally, then a cage of suitable length will ensure that slow electrons entering the cage in the negative half-cycle will in the majority of cases leave it in the succeeding positive half cycle, while at the same time the fast electrons in the positive half cycle will, by virtue of their velocity, be able to leave during the same half cycle. In this way it is arranged that in the positive half cycle there are a large number of electrons leaving the cage, while in the negative half cycle a large number of electrons are entering the cage. This collection of electrons results in a pulsating space charge generated within the cage which regenerates the oscillation. It is pointed out in the Heil and Heil paper that an indication of the energy supplied to the oscillating circuit may be obtained by calculation of the energy loss of individual electrons during one period, and adding them.

It is not proposed to enter into the mathematical analysis of this type of tube here, since it is rather involved, but it was shown by the originators of the tube that a maximum of 35 per cent. of the electron beam energy can be converted into oscillation energy, while the actual efficiency of the

generator could be 100 per cent., since the electron beam can finally be stopped in the opposing field. It must be re-emphasised that this particular type of tube can only be considered as the forerunner of the modern successful velocity modulation tubes which have since been produced.

An example presented in the original paper will now be quoted—possibly rather an optimistic example—for the performance of the tube. Taking a tube in which a beam of 50 milliamps can be obtained and an accelerating electrode with a potential of 10,000 volts, the oscillating electrodes having a potential of 4,000 volts, the beam would be in the order of 400 watts, so that with an energy efficiency of 35 per cent. the output would be 140 watts. This is modified by a statement that in practice one could reckon on 25 per cent. efficiency, which would give an output of 120 watts, the length of the cage for a 20-cm. wavelength being about 5 mm.

The Klystron

The modern conception of the velocity modulated tube is the Klystron, invented by R. H. and F. Varian at the Stanford University, California, and described by them in the *Journal of Applied Physics*. The derivation of the name given to the tube is of interest, as also is the name of the resonators within the tube, in that a description of the action of the electrons is therein contained. Taking them in reverse order, from the Greek "rhumba," to oscillate rhythmically, we get the action of the electrons in the resonators, or "rhumbatrons," which form an integral part of the tube. Also from the Greek, the word "klyso," the breaking of waves on the beach, conveys an excellent impression of the manner in which electrons behave when they reach the second rhumbatron in the tube. It will be as well to mention, at this stage, the names given to the two rhumbatrons, namely the "buncher" for the one where the electrons are given velocities which results in the formation of bunches, and the "catcher" for the second, where the bunches arrive, and like the sea water, having been built up into waves, break and slow down.

The manner in which the Klystron works should not be difficult to understand, having considered the Heil and Heil tube. The same principles are employed of bringing the beam of electrons under the influence of a radio-frequency field, allowing them to drift and form themselves into bunches, and then abstracting power

from the velocity-modulated beam. But in the Klystron, electrical resonators are employed instead of plain grids for the principal electrodes.

For a considerable number of years now the properties of electrical resonators have been well known. Much of the early work was done by J. J. Thomson in studying the nature of Hertzian waves, when he showed that the natural wave-length of a solid metal sphere was 1.4 times its diameter. Since that time, it has been proved that the natural wave-length of a hollow conducting sphere is 1.14 times its diameter. In using resonators through which electrons have to pass in tubes operating at very high radio frequencies, this figure shows that if the resonator were of spherical form a fast electron would not be able to pass through it before phase reversal took place. The Varian brothers designed a resonator which is of toroidal form. A fairly good idea of the shape can be formed by considering an inflated rubber balloon of spherical shape, held between the thumbs. The thumbs are then pressed in until they nearly meet, so leaving a distance between the walls of the balloon at this point which is considerably less than the diameter. In the Klystron resonators the grids through which the electron beam passes are situated at these closely adjacent reentrant points, so that the electrons pass right through the resonator in a fraction of the change-of-phase time. Fig. 3 shows a cross-section of the resonator and position of the grids.

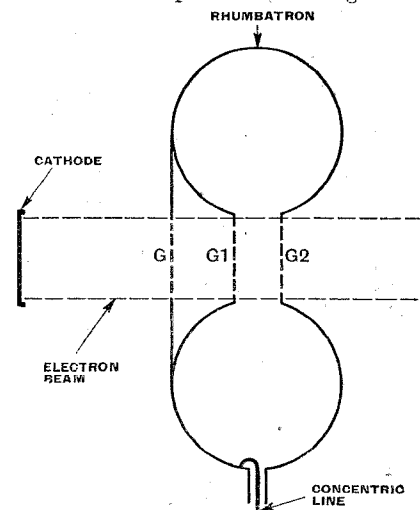


Fig. 3. Arrangement of cathode and first-stage (buncher) electrodes in a Klystron tube.

Let us now consider the operation of the Klystron as amplifier, oscillator, detector or modulator. Electrons, after leaving the plane cathode before enter-

Velocity-Modulated Valves—

ing the first rhumbatron or buncher, pass through a grid of tungsten wires G, the purpose of which is to ensure a parallel beam by straightening the lines of force of the electrostatic accelerating field between the cathode and the buncher. Having passed through this grid the electrons traverse the field-free space between it and the first buncher grid G₁, which, like all the grids in both buncher and catcher, is of honeycomb construction. Radio-frequency energy, fed to the buncher via the concentric line seen in the diagram, causes the electrons to assume different velocities according to the phase and magnitude of the RF operating upon the buncher during the time of transit of the electrons. This can be readily appreciated after considering the Heil and Heil tube.

Fig. 4 shows the complete Klystron with the two rhumbatrons, the buncher and the catcher connected by a tube, the length of which forms a field-free drift space. (The final anode B and the oblique grid C are only to be considered when dealing with the tube as a detector, and are included in order to obviate the reproduction of diagrams that would be identical with the exception of these additions.)

We will now consider the Klystron as an amplifier. Having emerged from the final grid G₂ of the buncher, the electrons enter the drift space, and by virtue of their different, but now unchanging, velocities form themselves into bunches, as in the tube described earlier, so that the beam is composed of layers of great electron density separated by comparatively rarefied spaces. The catcher rhumbatron is placed at a distance from the buncher where the maximum electron beam density due to the bunching takes place.

Let us consider the action of the second rhumbatron. In the buncher, changes in velocity of the electrons are achieved by giving energy to the electrons by exciting the resonator. If electrons were passed through a resonator with opposite phase relationship, they would be de-accelerated, and instead of taking energy from the resonator would give it up inductively. This is what happens in the second rhumbatron or catcher,

which by virtue of the phase and strength of this oscillation takes from the electron beam more power than was originally given to the electrons at the buncher, so making the Klystron into an amplifier. It should be observed that what the catcher primarily acquires from the electron beam is power and not current, since the electrons may go on beyond the grids.

A further word must now be said

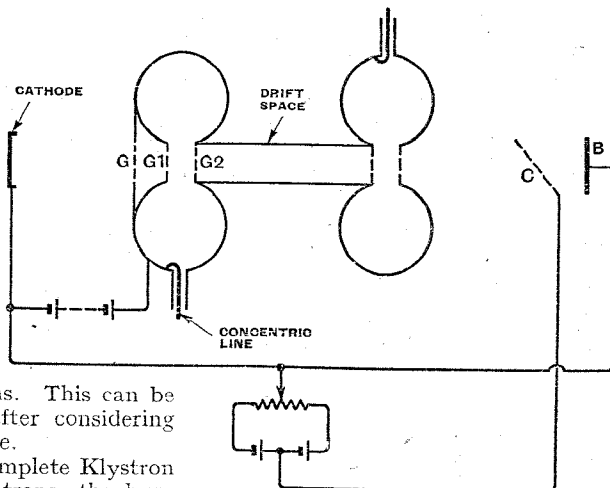


Fig. 4. The complete Klystron tube and its external circuit.

regarding drive power given to the resonator. In the case of the buncher the radio-frequency signal is applied to it, this signal setting up oscillation at the natural frequency of the resonator. In the case of the catcher rhumbatron no external source of radio-frequency power is used for excitation. The passage of the bunched electron stream through the first grid induces charges on the metal, and so a pulsating current is induced in the resonator and oscillation is set up. This oscillation is used as described, to slow down the stream and abstract power from the electrons.

As an Oscillator

In using the Klystron as an amplifier, the buncher is driven by an external source of power, such as a radio signal from an aerial, the signal directly controlling the amount of bunching that takes place. When it is desired to employ the tube as an oscillator, the driving power for the buncher is derived from the oscillatory power in the catcher, a proportion of which is fed back; whereupon more concentrated bunching takes place, with a resultant increase in the induced field at the catcher, which is

followed by still greater bunching influence when the proportion of the oscillatory power at the catcher is employed at the buncher. The only modification necessary to the Klystron in order to use it as an oscillator is that the concentric line used to feed the buncher, instead of being terminated for introducing external power, is connected directly to the catcher. This feed-back connection can be clearly seen in Fig. 5.

Reverting to Fig. 4, and this time taking the final anode and the obliquely inclined grid into consideration, we have the arrangement of the Klystron elements for use as a detector. In this case, use is made of the fact that, although a large majority of the electrons in the beam give up energy to the catcher, and therefore pass the last catcher grid with a decreased velocity, some of the electrons must pass through in the wrong portion of the cycle and therefore gain energy and speed. The oblique grid shown in the diagram is employed as a device for sorting electrons according to their velocities, the potential applied to it being near that of the cathode. With no signal input to the tube, almost all the electrons pass straight through the grid. In the presence of an applied signal, however, the electron beam undergoes a bunching action, the bunches resulting in the build-up by induction of a field in the catcher, this field causing some of the electrons to slow down to such an extent that they do not possess sufficient velocity to pass the collector grid, so causing a variation in the amount of current received by the collector anode. Another method of obtaining the same result is to apply a potential to the collector grid, of




Fig. 5. Feed-back connection for converting the Klystron into an oscillator.

such magnitude that with no signal at the buncher, no electrons are able to pass through to the collector. Any increase, then, in electron velocity due to a signal being applied to the tube is sufficient to carry the electrons past

the grid and cause a current to flow to the anode.

It is possible to use the tube as a modulator by varying the beam current, or by varying the cathode potential, which causes corresponding variations in phase relationship.

Finally, it is proposed to set down the most important requisites for a Klystron oscillator and amplifier as given by Varian and Varian in their original paper. "For an amplifier:

(1) Efficient resonators, such as rhumbatrons, with holes or grids permitting cathode rays to pass through them along the lines of force of their electric fields. (2) A beam of cathode rays going through both resonators and carrying power enough to make the catcher oscillate more powerfully than the buncher. For a Klystron oscillator the requirements are those of the amplifier, and in addition: (3) A coupling loop or some practical equivalent line feeding power from the catcher to the buncher. (4) A PD between the cathode and the rhumbatrons such that the bunches arriving at the catcher are not too far out of phase with the field within it."

[It is hoped to describe other velocity-modulated valves in a subsequent article.]

Standardised Condensers

More Efficient Production

THE issue of a new War Emergency British Standard Specification dealing with condensers for wireless receivers was mentioned in our last issue. The object is to increase the efficiency of receiver condenser manufacture by restricting the number of types to that considered sufficient to meet the normal requirements of the industry under wartime conditions.

The Specification provides for nine types of electrolytics, with working DC voltages ranging from 12 to 500 and capacities from 8 to 50 μ F. Tubular paper condensers are divided into Types 1, 2 and 3, with rated DC working voltages of 250, 500 and 1,000 respectively. Eight capacity values, from 0.001 to 0.25 μ F, are provided in each range.

Methods of construction and dimensions of condensers are standardised, and the Specification includes an agreed colour code for indicating capacity values, etc.


Copies of the Specification (No. BS 271-1941) are obtainable from the British Standards Institution, 28, Victoria Street, London, S.W.1, for 2s. 3d. by post.

Aviation Portable

Novelty from the U.S.A.

COMPLETE coverage of the aeronautical and medium-wave broadcast frequencies in three bands is the outstanding feature of the "Learavian" portable recently marketed by Lear Avia, Inc., of New York. The portable, which may be operated from self-contained dry cells, or from AC or DC mains, covers the following wavebands: 195-410 kc/s and 2,200-6,300 kc/s (aeronautical, maritime

The control panel is mounted on the top of the portable. When the headphones are plugged in the loudspeaker is cut out.

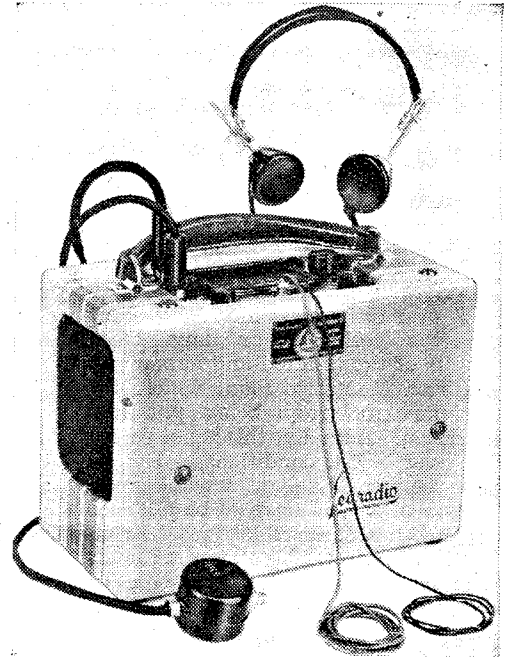

DF, and meteorological), and 540-1,560 kc/s (broadcasting).

An additional feature of this portable is that it incorporates an inter-communication 'phone system for which the only control is the microphone "press-to-talk" button.

In addition to its built-in frame aerial, provision is made for the use of an external aerial and earth, which would be necessary on board aircraft.

Housed in a case measuring 8½ in. high, 12 in. wide, and 6 in. deep, the portable weighs only 14 lb. 3 oz. in-

cluding the dry cells, which are of sufficient capacity for 200 hours' working. The cost, complete with batteries, but excluding microphone and headphones, is \$44.95.

Valve Voltmeters

New Salford General Purpose Instruments

IN the Type BW218 valve voltmeter recently introduced by Salford Electrical Instruments, Ltd., Peel Works, Silk Street, Salford, 3, Lancs, the meter is provided with an easily read vertical scale, and the three ranges of 0-5, 0-25, and 0-100 volts are selected by a rotary switch. The instrument works from a 3-volt dry cell which is inserted through a removable finger button at the back. The input terminals are also at the back of the case, and the live terminal is insulated with low-loss ceramic material.

The Type BW211 is designed for a wider frequency range (20 c/s to 200 Mc/s), and consists of a probe type diode rectifier giving peak readings in association with a degenerative DC amplifier. There are five ranges with maxima of 1.5, 5, 15, 50, and 100 volts respectively, and the accuracy is ± 2 per cent. of full scale on all ranges. The instrument is suitable for operation from AC mains 200-250 volts without adjustment.

The makers state that quick delivery can be given to high-priority orders.



Salford Type BW218 valve voltmeter with vertical scale and (below) peak diode voltmeter Type BW211 for frequencies from 20 c/s to 200 Mc/s.

Future of European Broadcasting

Some Technical Aspects of Channel Allocation

ON the face of it, there would appear to be no point in discussing the technical or any other aspects of the ill-fated and apparently still-born Montreux Plan, which the war prevented from being put into operation. Actually, this is not so, for whatever be the conditions in Europe after the war, this plan, or some modification of it, will have to be put into force as soon as possible after the conclusion of peace. This statement holds good even in the unthinkable event of Hitler winning the war and turning Europe into one country. The reason is that the necessity of the plan is dictated not only by the ever-increasing number and power of European stations but by the physical structure of the European continent and the laws governing wave propagation. These things are immutable, and even Hitler can do nothing to alter them.

For these reasons it will not be unprofitable to examine certain technical considerations associated with the Montreux Plan which are put forward in a recent issue of the *Journal des Telecommunications* by M. Raymond Braillard, the well-known chief of the Brussels checking station of the U.I.R. The technical aspects which he discusses will hold good after the war even though political considerations may call for some modification of the original plan.

Synchronised Transmitters

It is common knowledge that the problem of avoiding mutual interference between European broadcasting stations has been steadily becoming more acute as the power and number of stations has risen. Probably at some future date frequency modulation or simple USW broadcasting may take a hand in solving the problem, but for the present the key to the puzzle is synchronisation and directional radiation, or "beam broadcasting" as it is sometimes called with a fine contradiction in terms.

Now it is quite easy on paper to cause any number of stations to share a common wavelength and radiate the same programme on it, but a tremendous amount of work has had to be done before it has become the prac-

tical proposition which it is to-day. The difficulty has been that, owing to various causes well known to wireless men, the carrier wave is apt to wander slightly from its allotted frequency.

Even with this problem of synchronisation solved, however, it would not be possible to allot the same frequency to stations radiating different programmes no matter how far apart they might be geographically within the confines of the European broadcasting zone. Even two stations of comparatively low power situated at opposite ends of Europe will interfere with each other at times by means of the indirect ray, as has been abundantly proved.

The solution here is directional radiation in the case of stations where geographical considerations permit. For instance, a station on the north coast of Africa has no need to radiate


in a northerly direction over the sea as it has no listeners to serve there. Similarly, a station on the south coast of Finland has no need to radiate in a southerly direction. If, therefore, technical considerations permit—and they do permit—the northward and southward radiation of two stations situated as mentioned above may be respectively cut out, and the stations allotted a common frequency.

In the Montreux Plan the obligation of using special aerials for directional radiation is imposed on 47 stations compared with 6 in the case of the Lucerne Plan. This ratio is, of course, at rock bottom, a measure of the increase in the congestion of the European ether, but it is also a measure of the technical progress that has been made since 1933 in the design of directional aerials.

Directional Radiation

There are three classes of directional aerial arrays which stations are called upon by the Plan to employ, the type varying in accordance with geographical and other considerations. The first class of aerial is known as a type D (directive), and is intended to give radiation of both ground and sky waves in one particular direction. The second, known as a P type (protégeant), is intended not so much to cause radiation in a certain direction as to stop it as far as possible along one particular direction where it would cause interference, this again applying both to ground and space waves. The third known as the R type (rayonnement indirect) is meant to stop radiation, in a certain direction, solely of the indirect wave, the ground wave being unaffected. This last known type of aerial is for use in districts where the broadcasting station is situated in the centre of its service area so that all-round radiation of the direct wave is required.

In order to remove all possible doubt as to the efficacy of directional aerials at great distances, the technical commission of the U.I.R. decided in January, 1939, to carry out certain tests to prove this point. The main object of the tests was to decide whether

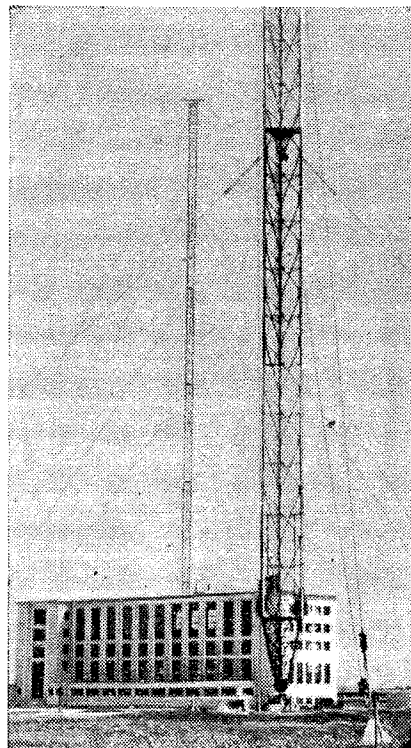

The anti-fading mast radiator of the Radio-Paris transmitter at Allouis.

the polar diagram obtained in the neighbourhood of a directional aerial was maintained at a considerable distance from it. The results of the tests were very conclusive.

One of the tests was made in connection with the 50-kW stations at Baronowicze and Madona, both of which are situated in Eastern Europe some thousand miles from Brussels. The former station was fitted with an ordinary omni-directional aerial, the latter station having a mast radiator directed in an E.N.E. direction, or, in other words, away from Brussels, which was, therefore, in a "protected" area so far as Madona was concerned. It was found that the ratio between the strength of the fields of directional and non-directional aerials can be conservatively taken as five to one, which corresponds to a reduction of the power of the interfering station by a ratio of 25:1.


Special Aerial Systems

Let us now consider a concrete case, namely, that of the stations at Turku, in Finland, and Tunis, in North Africa, for which the Montreux plan made provision for the sharing of a common wavelength. They are situated some 1,700 miles apart, a distance which, with 100 kW in the aerial, would be totally inadequate to give freedom from mutual interference. Incidentally, it may be observed that with omni-directional aerials two stations of this power would have to be separated by at least 3,000 miles—an impossibility in Europe—if mutual interference were to be reduced to a negligible amount.

Using directional aerials, it would be possible for these stations to double their power to 200 kW and yet not interfere with each other to any but a negligible extent. Actually, the effect of using the directional aerial, so far as mutual interference is concerned, is that the apparent power of the interfering station is reduced to 4 kW. It should be particularly noticed that in the cases discussed we have been considering the use of the very simplest type of directional aerial, whereas, by the use of more complicated aerial systems, it is possible to concentrate a transmission in one direction or to check its radiation in several directions simultaneously.

Reference has already been made to the R type aerial, which is intended to cut out radiation of the sky wave in a certain direction without the direct ray being affected. M. Braillard points out that an aerial of this type is used at station WLW (Cincinnati), U.S.A. Adjoining an ordinary omni-

directional aerial is a directional one from which the sky wave radiates at a predetermined angle. Some ten per cent. of the transmitter power is fed to this auxiliary aerial, and by suitable

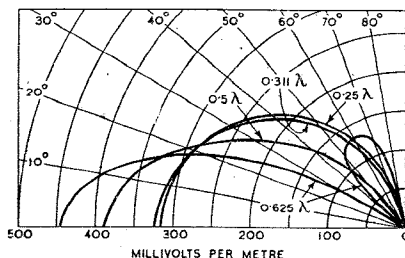

When the height of the aerial reaches 0.625 of the wavelength used, space-wave radiation re-appears in force.

adjustment of the phase of its radiation as compared with that of the main aerial the strength of the space wave in the "screened" direction is reduced by 10 db.

Much useful information is also given by M. Braillard concerning the use of non-fading aerials, which, while not specifically laid down as compulsory in the Montreux Plan, are nevertheless strongly urged for the purpose of covering a given area with lower power, so enabling the number and power of transmitters to be reduced, and therefore helping greatly in the reduction of mutual interference. Best reception is obtained when the field strength of the sky wave does not exceed one-half that of the ground wave. The point where this ratio is exceeded marks the end of the primary reception zone of the station. Conditions worsen until the two field strengths are equal, after which the night-reception zone is entered upon, where the ground wave does not interfere and fading is due solely to the vagaries of the ionised layers.

It is obvious from the foregoing that if it is possible to design the aerial so that the field-strength of the direct ray is strengthened and at the same time that of the indirect ray weakened, the primary zone of reception can be greatly extended. This can be done by using a vertical mast radiator, the height of which is usually half the wavelength used. It has been shown that the radiation of the direct ray increases until one reaches the half-wavelength value, and although a greater height will cause further strengthening of the direct ray, the sky wave, which has hitherto been kept to negligible proportions, reappears in force.

Tests show that in certain cases the use of an anti-fading aerial

doubles the apparent power of the station, one of the most remarkable instances of benefit being provided by the Beromunster station, where measurements of radiation reduction at certain angles have been made by apparatus installed in an aeroplane flying round the station at a constant altitude.

Some very remarkable figures are given concerning the high degree of frequency stabilisation which has been reached. Stations have been stabilised within limits far smaller than those laid down by the Montreux Plan. Some stations show particularly noteworthy results, an instance being furnished by the Gleiwitz-Reichenbach twin transmitters, which, during August, 1939, showed a maximum variation of five-hundredths of a cycle-per-second, the average daily variation being still less, namely, 0.03 c/s. It must not be forgotten that in the above figures are incorporated also the variations of the measuring instrument and the actual errors of measurement.

Frequency Stabilisation

It can be said that it is possible to obtain a degree of frequency stability of the order of one in a hundred million, a degree of accuracy which is equal to, if not better than, that obtained in the field of astronomical horology, and corresponds to a variation of about a thousandth part of a second in a period of 24 hours. It should, furthermore, be remembered that such accuracy is not obtained by any very complicated arrangement. It is due to the progress made in such things as the cutting of crystals, the adjustment of power supply voltages, and of temperature, which have enabled laboratory methods to be used under actual everyday working conditions.

In the case of the Gleiwitz-Reichenbach transmitters mentioned above, it is of interest to note that the synchronisation has been found to be so accurate that it is impossible to detect any appreciable difference in the frequency of the two transmitters. This means that the frequencies differ by an amount considerably smaller than one-hundredth of a c/s.

All the facts and figures given above refer to a period before the war came along with the inevitable intense concentration on regardless-of-expense research and development work. It certainly gives food for thought concerning the tremendous speed-up which the war is bound to bring about in technical progress, and the effect it will have on post-war European broadcasting.

Electrolytic Condenser

A Simple Capacity-measuring Bridge : Testing for Leakage

By F. A. BOYER, B.Sc. (Lond.)

THIS article describes a simple capacity bridge which can be used with the leakage measurer described in *The Wireless World* of December, 1940, and can be built up with it to form a complete test set for checking electrolytic condensers and measuring the capacity of paper condensers.

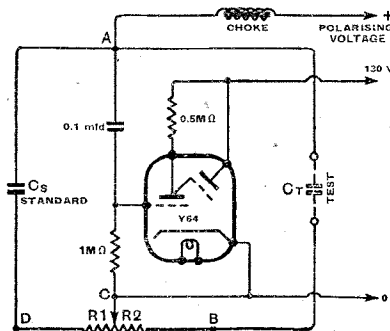


Fig. 1. Basic bridge circuit with cathode-ray indicator.

It is not intended to give precision readings of capacity, but it does enable one to see immediately if a condenser is good or whether it is a "dud," and so is particularly suited for rapidly checking condensers in workshops or service repair depots. Ordinary radio components are used in its construction, so the cost is very small.

Fig. 1 shows the basic circuit of the bridge, which is of a standard form. A potentiometer forms two limbs of the bridge, the other two being a standard condenser and the condenser under test. The AC testing signal is obtained from the mains via a transformer across points B and D, and an electron ray tuning indicator is used to determine the null position. This gives a visual indication, which is of great advantage in a noisy room, and, moreover, possesses the advantage that 50-cycle AC mains can be used as the testing signal, whereas using telephones would require the provision of a separate 1,000-cycle oscillator. The null indicator is between A and C, C being the moving arm of the potentiometer. By adjusting this arm a point of balance can be obtained to give minimum deflection on the indicator. When this occurs we get the

equation: Impedance AB ÷ Impedance AD = Resistance BC ÷ Resistance CD, or $C_T = C_s \times \frac{R_1}{R_2}$. If the potentiometer grading is linear, the resistance is proportional to the percentage angular rotation and Fig. 2 shows a graph of capacity plotted against this percentage rotation. The law of this graph (which, incidentally, is that of a hyperbola) gives the effect of crowding the scale towards the end, which is just what is required, as we have the greatest accuracy for the smaller capacities.

Polarising voltage, which is essential when measuring electrolytic condensers, is applied across points A and C through a high-impedance choke.

Practical Details

The actual components used were chosen according to what was at hand. The vital part is the potentiometer. This must be a high-grade wire-wound component. A carbon track resistance will give trouble owing to the polarising voltage passing through it. A suitable value is between 5,000 and 10,000 ohms. The standard condenser used was an ordinary 8-mfd. paper type, 500V DC working. This gives a working range from 0.1 to 50 mfd. Using a switch change-over to a 1-mfd. condenser the range could be extended down to 0.01 mfd. This extra switch was not incorporated in the actual instrument described, as it was intended only for testing high-capacity

Fig. 2. Law of capacity against rotation of the bridge potentiometer.

electrolytic or large paper condensers. The standard condenser must have a working DC voltage at least as high as the highest polarising voltage used.


Test Set

The indicator is an Osram Y64 "Tuneray" indicator and is connected via a 0.1-mfd. 500V DC working condenser. The target operates at 130V, obtained from the power supply. The transformer giving the AC signal is an ordinary speaker transformer of ratio 18.2:1, which gives 12½ volts AC, which is ample to close the indicator.

The polarising voltage choke is the secondary of an AF transformer. When building the bridge it is advisable to check the effectiveness of this choke by testing a paper condenser, which requires no polarising voltage, and noting if the operation of the bridge is affected by shorting the end of the choke to earth. If so, a different AF transformer should be tried or two used in series.

The scale of the potentiometer is hand-calibrated. It can be calibrated by calculation, but the best way is to calibrate against good condensers. By connecting a few condensers in series and parallel the whole scale can be covered. Thus four 1-mfd. condensers can give readings for 0.25, 0.5, 1, 2, 3 and 4 mfd., and four 8-mfd. condensers can give readings for 2, 4, 8, 16, 24 and 32 mfd. The average of a number of readings for different condensers can be taken as the correct reading.

If a power pack is provided the bridge could be built as a separate unit. It was actually intended to be built in with the leakage measurer to make one compact test set. The whole

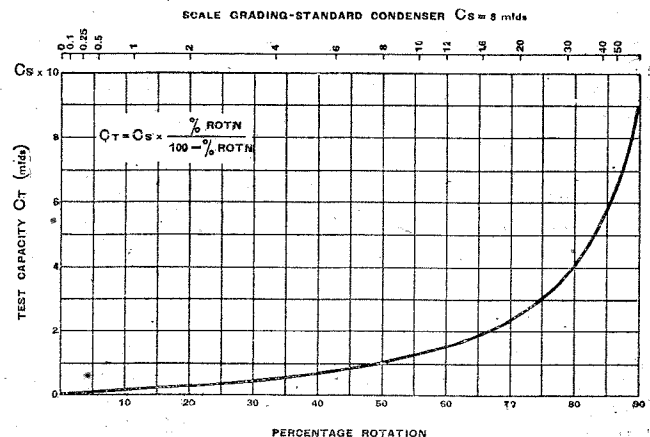

set measures 10in. x 15in. x 6in. high, and is entirely self-contained. The switching is somewhat complicated, as it is necessary to switch the polarising

voltage to either the bridge or the measurer. The complete circuit diagram is shown in Fig. 3, which gives

charges the condenser when switched to "off." It is convenient to mount the control knobs on top of a panel.

are viewed through light shields consisting of metal tubes, painted dull black, inside which the indicators are located.

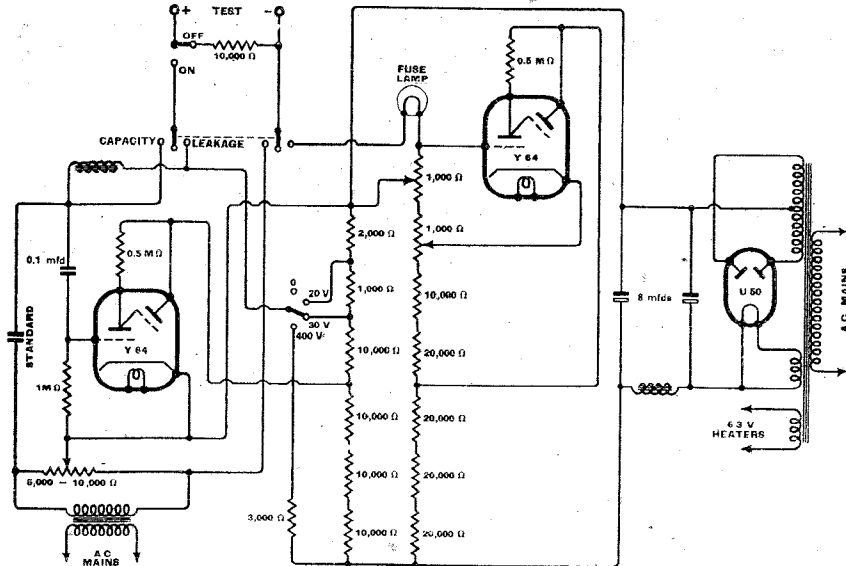


Fig. 3. Circuit diagram of the complete test set, showing switch change-over to the leakage indicator already described.

all the switching details. So as not to add to the complications, separate "Tuneray" indicators are used. The switches used are ordinary radio switches which were adapted to make the necessary connections. A useful refinement is the test condenser on-off switch, which dis-

The switches and controls are mounted below the panel, whilst the rest of the components are screwed to the base, inside the box, long flexible leads allowing the top panel to be wired and screwed in position. The tuning indicators are mounted vertically on the bottom of the box, and

Foreign Journals

THE fact that very few of the foreign technical journals arriving in this country at the present time find their way into such "open" libraries as those at the Science Museum and the Patent Office makes the Abstracts and References section of *The Wireless Engineer* increasingly valuable to the engineer and research worker. This section of our sister journal, which in the September issue contains nearly 300 abstracts from, and references to, articles on wireless and allied subjects recently published in the world's technical journals, is compiled by the Radio Research Board. Some of the abstracts occupy more than a page, but the length is not necessarily a yardstick of the importance of the work concerned; the difficulty of language and the accessibility of the journal are determining factors.

In addition to the abstracts and references, a summary of recently accepted wireless patent specifications is given each month. The September issue, which was on sale on the first of the month, also contains a theoretical investigation of the time constants of DC amplified AVC circuits and the first of a series of articles on coupling circuits as bandpass filters.

The Wireless Engineer is obtainable to order through newsagents, or direct from the publishers at Dorset House, Stamford Street, London, S.E.1, at 2s. 8d., including postage.


Traffic Control by Radio

New York's Two-way Communication System

A FLEET of twenty "petrol" cars equipped with Westinghouse transmitters and receivers has been brought into the service of the Brooklyn and Queen's Division of the New York Transit System to expedite the despatch of over a million passengers each day in the city's 1,235 tramcars and 300 buses. Ten of the patrol cars have 15-watt transmitters as well as receivers, whilst the remaining ten have receiving sets only.

The central transmitter has a power of 50 watts, with its aerial 240ft. above the street level. It works on a frequency of 31.46 Mc/s and is remotely controlled from the traffic controller's headquarters. All the car transmitters radiate on a frequency of 39.34 Mc/s.

The function of the cars, which carry emergency repair equipment, is to divert traffic to avoid congestion and consequent delay.

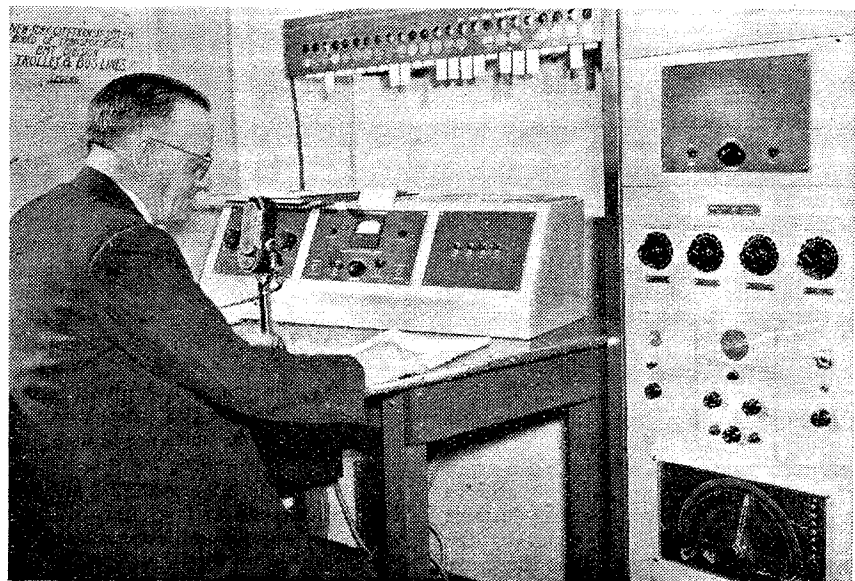

The desk of the traffic controller from which the central transmitter and receiver are remotely controlled.

Electrosurgery

Radio Technique in the Operating Theatre

By A. W. LAY, F.Inst.P.

(Concluded from page 233 of the September issue)

IN contrast to cutting operations—when the ideal is to produce a white film of clotting on each side of the cut—frequently the abnormal tissue is of such a nature that the surgeon desires to destroy the diseased part by dehydrating it or, in other words, by drying it up. To accomplish this, discs are brought into contact with the tissue to be destroyed, and it is thus dehydrated *en masse* by intense local concentration of heat immediately under the disc. A temperature of 60 deg. C. to 100 deg. C. is necessary to dry out tissue completely, this being reached by using a current of very high density; it then spreads out through the body to a lower density when it is collected by the “earthing” plate mentioned earlier.

By using a metal disc of 2 centimetres diameter and applying a current of 4 amperes it is possible to dry up a volume of animal tissue 2 cms. diameter and 2 cms. deep in about 90 seconds. After applying the current for this period the tissue will be boiled dry and sparks will then appear over the edge of the disc; when this happens further drying is not possible. Tissue which has been dealt with in this matter forms a slough or dead area which gradually separates from the surrounding parts, and new tissue then fills the resulting cavity by the process known as granulation.

In order to provide sufficient current to meet the maximum requirement of this drying-out process, about 250 watts of energy should be delivered by the high-frequency equipment. This energy may be consumed as a heavy current at low voltage or as a weak current at a corresponding high voltage—depending upon the impedance in the path of the current.

Cosmetic Surgery

There is also a surgical technique known as electro-desiccation—or sometimes as fulgeration—in which a train of high-frequency sparks is made to impinge upon surgical wounds and surface abnormalities in order to dry them out. In this treatment there are two methods in use. One of these is known as the English and the other the American method.

The first of these uses a condenser couch upon which the patient reclines. Under this couch a plate is fixed and connected to one output terminal of the high-frequency generator. The other terminal is connected to the patient who, therefore, forms part of a condenser system of which neither plate is earthed. The patient's body is, therefore, electrically alive to earth, and sparks can thus be drawn from the region to be treated by advancing a needle-pointed electrode towards the tissue until the intervening air becomes ionised and sparks pass across the air space.

In the American method—which is finding increasing favour in this country—no couch is necessary, as the patient is connected to one terminal of the current source, this terminal being earthed. To the other terminal, which is the live or active terminal, is connected a cable at the end of which is an insulated handle into which is fitted a point. By bringing this close to the patient's body, a train of sparks is started.


In the first part of this article the author dealt with the use of wireless technique in major operations. The application of radio principles in more delicate operations associated with the brain and the eyes are discussed in this instalment

and the train of sparks tends to cease, but, by increasing the voltage, the sparks pierce this top layer and commence to dry out another layer. Alternatively, the distance between the point and the tissue may be reduced to produce approximately the same effect with a given voltage. Electro-desiccation is used extensively in “beauty treatment” with excellent results.

A very important application of high-frequency current for surgical purposes is in the field of urology. This necessitates cutting the tissue with high-frequency current under water; but full details and explanation of this technique are outside the scope of this article.

Yet another important application of high-frequency current is in the realm of ophthalmic surgery, where

Fig. 3. A delicate eye operation. Fluid which has forced the retina away from the choroid is removed by piercing the latter by a high-frequency arc of suitable intensity.

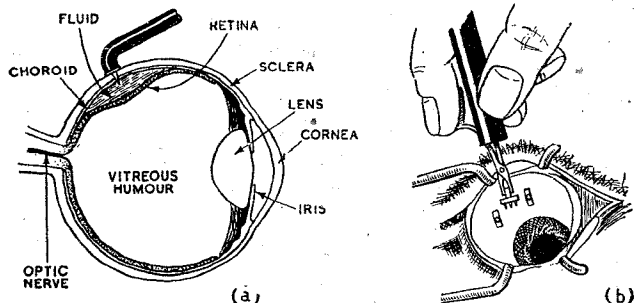

The length of spark used depends on the nature of the abnormal tissue and the treatment. In general, sparks from about two to ten millimetres in length are used, and this naturally demands a high-voltage generator, although a high-frequency transformer across the output of standard equipments will serve the purpose.

In this form of treatment the current component of the energy is low, otherwise extensive clotting would be produced in a region where only superficial drying out is required. When a thin layer of tissue has been thus dried it becomes an in-

it is used for the correction of detachment of the retina. An operation for this becomes necessary owing to the accumulation of fluid between the retina and that part of the eye known as the choroid, as shown in Fig. 3. The object of the operation is to release the fluid and thus allow the retina to collapse back on to the choroid.

Until recent years this operation was exceedingly difficult, and rarely was a satisfactory result obtained. Now, however, owing to the development of a highly skilful technique by ophthalmic specialists, which makes use of high-frequency currents, very success-

ful operations are performed in the following manner.

Small electrodes as shown in Fig. 4 are attached by means of a chuck to the operating handle, and when the surgeon is ready to operate, the electrodes are applied to that part of the eye known as the sclera, in the manner indicated in Fig. 3. The current is switched on for a very accurately timed period—just long enough for the points to pierce the sclera and choroid and to prevent bleeding. Upon withdrawal of the points the fluid drains away through the small holes thus created and the retina falls back upon the choroid. The slight local inflam-




Fig. 4. The electrodes which are used to pierce part of the eye in order to remove fluid from the back of the retina.

mation caused by the operation promotes adhesion—thus assisting nature's healing process.

In the field of ophthalmic surgery many other delicate operations are performed very successfully by means of high-frequency currents. For successful work in this field it is essential that the surgeon shall have for his use a source of current of suitable characteristics which can be easily controlled to desired values very accurately; such equipment is now available, and it is being used with great success by specialist surgeons.

The Marconi-Ekco instrument, which has been developed for this purpose in close collaboration with ophthalmic specialists, is illustrated in an accompanying photograph. This instrument is known as the Therator Minor, Type MME3. Its control is simple and smooth.

By means of a graduated dial the output can be pre-set to meet the surgeon's requirement over a wide range of current values. This is continuously variable from zero to maximum output, which is 75 watts of high-frequency energy at 1,500 kc/s (200 metres). Fig. 5 gives an outline of the circuit used in this instrument. It has been fully approved by the surgeons who use it. The output from the

instrument provides sufficient cutting current for major operations in general surgery when only cutting and slight clottings are desired.


When intense coagulating current, and current which will cut under water is required, then the Marconi-Ekco MME10 type of apparatus will provide the necessary output of current of suitable characteristics.

The MME3 instrument is designed to be compact, portable and robust. It is encased in aluminium, and the chassis is of this metal. Interference to radio communication is thus reduced to a minimum. This problem of interference with radio communication by medical apparatus is engaging the attention of the authorities concerned and a satisfactory solution is in sight. This solution will be applied when hospitals, clinics and other health services are provided with sufficient funds to undertake the recommendations made.

The type of apparatus used in ophthalmic surgery is suitable also for use in dermatology, or operations on the skin, and in cosmetic surgery. With this type of apparatus successful operations are being performed on skin carcinoma; also for the removal of warts, tumours, skin blemishes and hairs, and for the correction of other abnormalities with excellent results.

The Interference Problem

In the field of brain surgery this type of apparatus offers facilities for the accurate control of current, which is of paramount importance in work of this nature. A highly successful technique, involving the use of the haemostatic—or blood-stopping—pro-

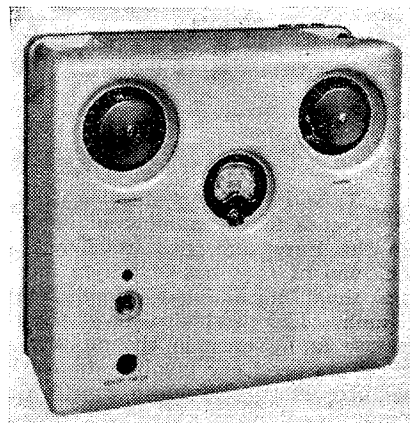

The Marconi-Ekco valve generator. It is used largely in delicate operations associated with the eyes and brain.

cedure, such as the MME10, is used extensively in general surgery, and in special fields—such as abdominal operations, amputations, cancer of the breast, diseases of the rectum, and other operations involving the necessity of extensive cutting and clotting.

In view of the handicaps which are at present imposed upon the medical profession, and the health services generally, when efforts are made to use high-frequency current for healing purposes, no doubt future legislation will balance the claims of health and entertainment in due proportion to the benefits which may accrue to the nation.

It is to be hoped that the architects of the new order will specify ample provision of funds for our hospital institutions and for research in order that medical science may be further advanced, and that the armamentarium

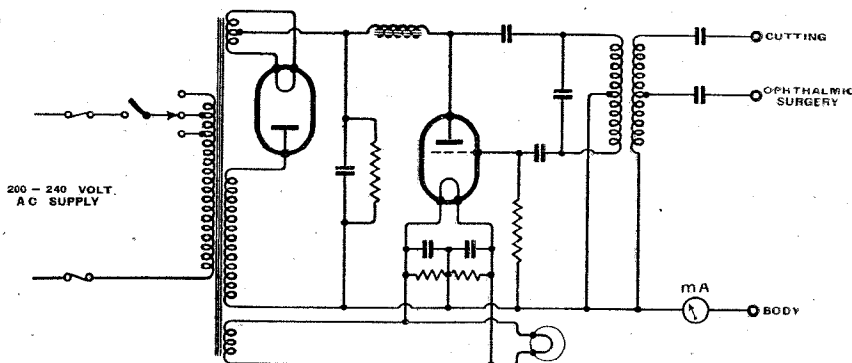


Fig. 5. The circuit diagram of the Marconi-Ekco valve generator. It provides an output of 75 watts at 1,500 kc/s. Apart from being used in ophthalmic and brain surgery it is also employed in cosmetic work for removing skin blemishes and superfluous hair.

properties of high-frequency currents has been developed by specialist surgeons.

The more powerful type of appara-

of the surgeon may be at least comparable in quality with that of other national services.

THE WORLD OF WIRELESS

EUROPEAN LISTENERS

Some Interesting Facts and Figures

A SYNOPSIS chart showing the increase in the number of licences in the European Zone from 1938 to the end of 1940 has just been issued by the International Broadcasting Union. The chart also shows the increase or decrease in the number of receivers per 1,000 inhabitants in each country in the European zone which comprises Europe, Iceland, the regions of the Mediterranean basin and the U.S.S.R. as far east as 40 degrees.

The relatively small increase in the number of licences in the countries where broadcasting has been organised for some years points to the fact that they are nearing the point of saturation, whereas in countries where the development of broadcasting is more recent the increase is very considerable.

For the first time Sweden heads the countries of the European zone in the matter of receiver density, followed closely by Denmark, which for some years held first place. Sweden possesses 232 receivers per 1,000 inhabitants, and Denmark 225. Great Britain remains third with 198. Iceland, which has the smallest number

of listeners, namely 18,261, is seventh on the receiver density chart, with 150 per 1,000. At the opposite end of the scale comes Turkey, which has only five receivers per 1,000 inhabitants. Italy has 1,400,000 licence holders, which represents only 31 per 1,000.

The international situation has been so fluid that some of the details tabulated are for June and July, 1940, whereas others are for December. The chart shows that Germany had 14,965,048 licensed listeners at the end of 1940. It does not, however, state whether this number includes Poland, for which no figures are given for 1940. The U.S.S.R. is second in the list with 10,551,361, and Great Britain, for which the figures quoted are those at June, 1940, is third with 9,132,200.

The approximate number of licensed listeners in the European zone at the end of 1940 was 49,336,000. This means that if there are, as estimated, four listeners in every family, the listening population is over 197 million.

The increase in the number of licence holders from the end of 1938 to December, 1940, was approximately 14,000,000.

HIGH-POWER STATIONS

Position in the United States

IT is foreseen by *Broadcasting* (Washington, D.C.) that the whole question of super-power broadcasting is likely to be reconsidered by the Federal Communications Committee as a result of the application of WLW, Cincinnati, for permission to use 650 kW regularly. Two other medium-wave stations—KSL, Salt Lake City, and WSM, Nashville—have applied for 500 kW.

WLW is the only station in the U.S.A. to have used 500 kW. Its permit, however, was cancelled over two years ago, and it now employs 50 kW, but is permitted to use 500 kW experimentally between the hours of midnight and 6 a.m. Those interested in logging medium-wave stations may like to know that during experimental transmissions WLW radiates on 700 kc/s, using the call letters W8XO.

WLW's application has been made as a result of a recent survey which revealed that such power was necessary to overcome atmospheric and give a serviceable signal in rural areas in the States of Ohio, Kentucky,

W. Virginia, Tennessee and Arkansas.

The suggestion from the owners of WSM is that the rule governing high-power stations be altered to specify that all stations on clear channels should operate with a power of not less than 50 kW. At present 50 kW is the maximum.

E.M.I. AT SMYRNA FAIR

THE sole British exhibitor of wireless apparatus and gramophone records at the international fair at Smyrna, Turkey, where enemy and neutral countries were exhibiting, was Electric and Musical Industries. Not only were they exhibiting in the British pavilion, but they provided the public address equipment and the recordings for the music relayed throughout the fair. The transmission of the B.B.C.'s Turkish bulletin was rebroadcast in the British pavilion. The value of such an exhibit in one of the few remaining neutral countries must be inestimable. The receivers were shown by E.M.I., a specially designed range of mains and battery models for the overseas market.

ALBERT HALL ACOUSTICS

Modified for Promenade Concerts

THE artistic success of the recent Promenade concerts by Sir Henry Wood and the London Symphony Orchestra at the Royal Albert Hall was largely due to the work of Mr. Hope Bagenal, A.R.I.B.A., of the Building Research Station, Watford, in controlling the famous echo in this auditorium.

The problem was to get sufficient volume from a moderate-sized orchestra with an audience of 2,000 in an auditorium with seating capacity for 8,000.

Having observed the improved acoustics when large flags were hung from the roof and walls, it was decided to lower the velarium or canvas canopy to the floor level of the balcony. This cut off some of the echoes and reduced the size of the hall. The Denham studios of London Film Productions lent big screens which were placed behind the orchestra, thus producing a smaller hall inside a large one, which provided the necessary intimacy.

A wooden canopy over the platform was added, which prevented the sound from being lost in the dome. Finally, to reduce the effect of absorption of high notes by the air in this large auditorium, a polished parquet floor 30ft. by 10ft. was placed around the conductor's rostrum.

SETS FOR SEAFARERS

MORE than 7,000 receivers have been supplied since the beginning of the war to men of the Royal Navy working on small craft and at shore bases by the Admiralty War Comforts Committee. Those supplied for use afloat have to conform to certain Admiralty regulations, which stipulate that the receiver must be non-radiating.

The latest issue is of 500 Ever Ready All-Dry portables, the cost of which has been defrayed by the Minesweepers and Coastal Craft Fund, assisted by generous grants from the Navy League and the Nuffield Trust for the Armed Forces of the Crown. Repair depots at main bases are provided by the Committee for the servicing of the receivers.

Some of the sets for shore are unwanted receivers given by the general public. Any receiver so long as it is not archaic, will be gratefully received by the Comforts Committee.

MATERIALS IN U.S.A.

Steel Condensers: Polystyrene Film

ACCORDING to *Communications* (New York), one large American manufacturer claims complete success in using steel as a substitute for aluminium in the manufacture of variable condensers. Thanks, it is stated, to the use of a specially developed grade of soft steel, capacity drift and microphony are less troublesome than with aluminium, but cost and weight are rather greater.

Polystyrene low-loss insulating material has now been introduced by the Bakelite Corporation of U.S.A. in the form of a flexible film, 1 mil. thick, and may thus be used as a dielectric in small condensers.

Although the effect of shortages and control of material is being felt, the latest figures available would suggest that so far there has been no decline in the production of domestic broadcast receivers.

FROM ALL QUARTERS

Canadian Amateurs Serve

In the section of *QST* devoted to activities of VE (Canadian) amateurs the writer states that at least 1,700 of the 3,380 licensed Canadian amateurs at the outbreak of war are now on active service. More than half the 1,700 are commissioned officers, the majority in the Royal Canadian Air Force. It should be pointed out that the total of 3,380 includes all ages, and every kind of physical condition.

B.B.C. News in English


THE following schedule of the times (BST) and the wavelengths to be employed by the B.B.C. for the transmission of news in English in the European and World Services will be operating when this issue is published:

0100					
0145	31.32	31.25	25.53		
0530					
0715	31.55	31.25	25.53	19.82	19.66
0900	49.59*	41.49*	31.55	25.53	25.38* 25.29*
				19.82	19.66
1200	31.25	25.53	19.82	16.84	16.77
			13.97		
1400	19.82	16.84	16.77	16.64	13.97
1430	49.59*	41.49*	25.38*	25.29*	
1700	31.75	25.53	19.82	16.84	16.77
1900	31.25	25.53	24.92	19.82	19.66
2145	31.25	25.53	19.82	19.66	
2300	49.59*	41.49*	30.96*		
2345	31.32	31.25	25.53		

Wavelengths marked with an asterisk are used in the European Service.

Week-end Radio Course

PROVIDED sufficient enrolments have been received a week-end course in radio engineering has been arranged by the Northampton Polytechnic, St. John Street, London, E.C.1. Classes will be held on Saturdays, 2-4.30 p.m., and Sundays, 10 a.m.-4.30 p.m., from September 20th to December 21st.

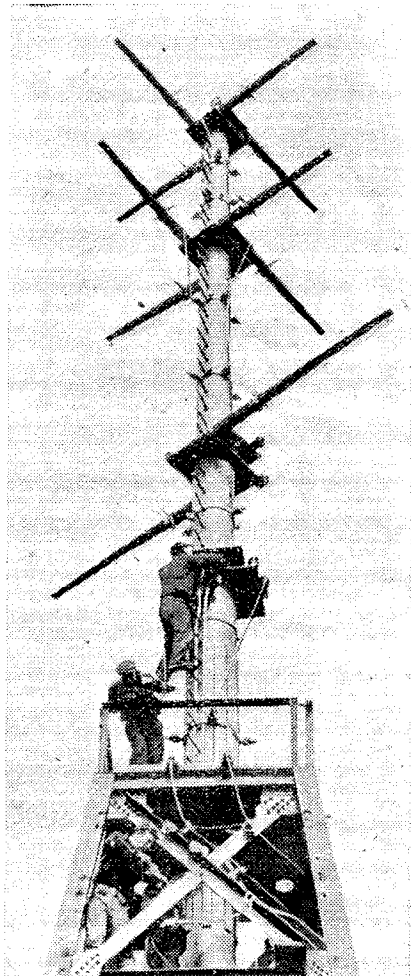

Courtesy "Radio."
FM AERIAL on the top of Mount Washington, New Hampshire, U.S.A., for the Yankee network's frequency modulation station W39B. The three-bay turnstile aerial, which was built by Radio Engineering Laboratories, Long Island City, withstood the very severe weather of last winter without suffering any damage. W39B, which has been operating on 1 kW, is to have a new 10-kW R.E.L. transmitter.

U.S. Amateur Frequencies

As a result of proposals by the American Radio Relay League the U.S. Federal Communications Commission recently changed the portion of the 10-metre band allocated to the use of telephony from 28.5-30 Mc/s to 28.1-30 Mc/s. This means that all but the lowest 100 kc/s of the band may now be used for 'phone. The section of the amateur band from 29.25 Mc/s to 30 Mc/s has been opened to frequency modulation.

Procedure

"To assist in teaching the correct procedure" in wireless telephony, the War Office is issuing a set of gramophone records, comprising three discs, for each formation headquarters.

Brit. I.R.E.

It is learned that negotiations are now in progress for the affiliation of the Australian Institution of Radio Engineers and the British Institution of Radio Engineers.

Dr. F. J. C. Van den Bosch will give a paper on the Augetron and its applications at the meeting of the London and Home Counties Section of the Brit. I.R.E. on October 25th at the Federation of British Industries, Tothill Street, London, S.W.1.

Farnsworth Honoured

At its recent convention at Detroit the Institute of Radio Engineers presented the Morris Leibmann Memorial Prize for the year to Mr. Philo Farnsworth for his contributions in the field of electronics.

Flouting the Ether Patrol

FIFTEEN American amateurs recently had their transmitting licences suspended for a period of 60 days because they had violated the order of the Federal Communications Commission prohibiting communication with amateurs in foreign countries. No evidence of subversive activity was brought forward by the F.C.C. The suspensions were stated to be "exemplary of emergency requirements and demonstrate the futility of trying to flout the ether patrol."

Soviet's Radio Mine

It was recently stated from the German broadcasting stations that the Russians are using a new type of land-mine which is detonated by short-wave transmissions from behind the retiring Russian forces.

Wright and Weaire

ON their appointment as directors of Messrs. Wright and Weaire, of London, N.17, Messrs. R. H. Fox and R. W. Merrick, who have been in the service of the company for many years, have assumed the offices of works director and sales director, respectively.

Salvage Drive

WE have been asked by the Ministry of Supply to draw readers' attention to the great salvage drive for waste paper which is being undertaken by the Salvage Department. The value of technical papers, however, should not be lost sight of, especially in view of the scarcity of some as a result of enemy action.

Pan-American Union

It has been suggested by Mr. John Royal, vice-president of the N.B.C., during his visit to South America, that a Pan-American Radio Union, similar to the International Broadcasting Union of Geneva, should be instituted. He urged that it should be strictly non-commercial.

B.B.C. North American Director

THE B.B.C. has created a new post, that of North American Director, to which Mr. R. E. L. Wellington has been appointed. This post is additional to that of North American Representative, which is held by Mr. Gerald Cock, who was, until the outbreak of war, B.B.C. director of television. Mr. Wellington, who has for some time been seconded

The World of Wireles —

to the Ministry of Information, has held various administrative posts in the B.B.C.

Gear for Sea Scouts: An Appeal

CONDENSERS, resistances, metal rectifiers, wire, morse keys or any other similar wireless equipment adaptable to signal purposes that can be spared by readers would be welcomed by the 6th Weymouth Troop of Sea Scouts. Gifts should be sent to the Troop Leader, Mr. R. Knowles, 218, Preston Road, Weymouth, Dorset.

Ferguson Receivers


At the recent annual meeting of the Thorn Electrical Industries, Ltd., the chairman stated that they had been able to meet only a very minute fraction of the demand for Ferguson receivers and that the company's large peacetime radio business had almost completely stopped.

Morse "Books" for the Blind?

It is suggested by a correspondent in *Electrical Review* that morse recorded on paper spools should be used in conjunction with a photo-electric-cell reproducer for "books" for the blind. Whilst morse is ideal for copying, experienced operators will agree that it is very slow and wearisome for listening.

Edison Day

THE American Senate recently approved the naming of February 11th as Edison Day in honour of the birth of the famous inventor on that day in 1847.

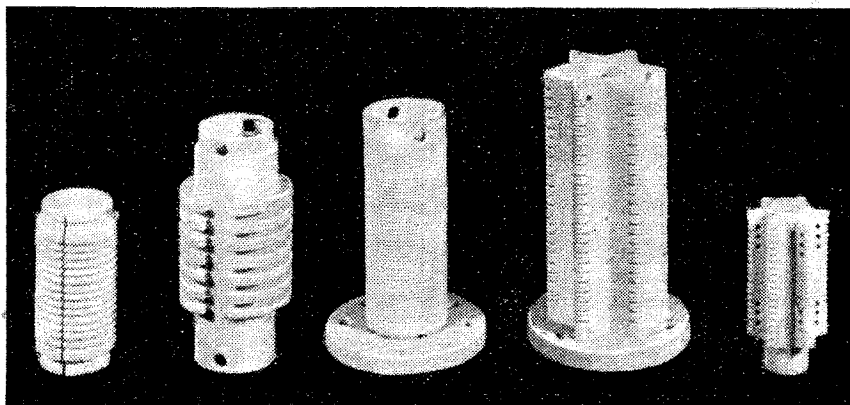

Courtesy, Bullers, Ltd.

CERAMICS. Showing a few of the various types of coil formers, some with complex grooving and slotting, that are now being moulded in low-loss ceramic material.

Glasgow Instruction Classes

THE Scottish Radio Retailers' Association informs us that the instruction classes in receiver servicing will recommence in Alan Glen's School, Montrose Street, Glasgow, on September 22nd at 7.30 p.m.

Diary for 1942

Our publishers announce that copies of *The Wireless World* Diary for 1942 will be ready during October. The price will be 2s. 3d., plus 6d. Purchase Tax; by post, 2s. 10½d. The data and reference sections have been compiled by the technical staff of this journal.

"Broadcasting as a Weapon"

CAPT. PLUGGE'S speech in the House of Commons, commented upon in the Editorial in last month's issue, is obtainable from His Majesty's Stationery Office, price 6d. (Official Report, July 3rd, 1941, No. 80, Vol. 372.)

Bakelised Fabric

A BRITISH Standard Specification (BS972-1941) covering synthetic-resin bounded sheet for electrical and mechanical purposes has just been issued. It costs 2s. 3d. by post from The British Standards Institution, 28, Victoria Street, London, S.W.1.

NEWS IN ENGLISH FROM ABROAD

REGULAR SHORT-WAVE TRANSMISSIONS

Country : Station	Mc/s	Metres	Daily Bulletins (BST)	Country : Station	Mc/s	Metres	Daily Bulletins (BST)
America				Iran			
WNBI (Bound Brook)	11.890	25.23	3.0†, 5.0, 6.0.	EQB (Teheran)	6.155	48.74	7.30.
WRCA (Bound Brook)	17.780	16.87	3.0†, 5.0, 6.0.	Japan			
WGEO (Schenectady)	9.530	31.48	9.0†	JZJ (Tokio)	11.800	25.42	10.30.
WGEA (Schenectady)	15.330	19.57	6.45‡, 9.55‡.	Manchukuo			
WBOS (Hull)	11.870	25.27	9.0.	MTCY (Hsinking)	11.775	25.48	8.0 a.m., 10.5.
WCAB (Philadelphia)	6.060	49.50	12.30 a.m.†, 5.55 a.m.‡, 11.30‡.	Sweden			
WCBX (Wayne)	9.650	31.09	10.30.	SBO (Motala)	6.065	49.46	10.20.
WCBX	11.830	25.36	6.30‡, 7.15†.	Thailand			
WCBX	15.270	19.65	1.0, 2.0.	HSP5 (Bangkok)	11.715	25.61	12.45.
WRUL (Boston)	6.040	49.67	11.30‡.	HS6PJ	19.020	15.77	12.45.
WRUL	11.730	25.58	11.30‡.	Turkey			
WRUL	11.790	25.45	8.30*, 9.30‡.	TAP (Ankara)	9.465	31.70	7.15.
WRUL	15.350	19.54	4.0*, 8.30*, 9.30‡.	TAQ	15.195	19.74	12.15.
WRUL	17.750	16.90	4.0*.	U.S.S.R. (Moscow)			
WLWO (Cincinnati)	15.250	19.67	5.0.	31-metre band	—	—	7.0, 8.0, 9.0, 10.15.
Australia				Vatican City			
VLR7 (Lyndhurst)	11.840	25.34	5.20.	HVJ	6.190	48.47	8.15.
Egypt				MEDIUM-WAVE TRANSMISSIONS			
SUX (Cairo)	7.865	38.14	6.50, 10.10.			ke/s	Metres
French Equatorial Africa				Ireland			
FZI (Brazzaville)	11.970	25.06	8.45.	Radio-Eireann	565	531	1.40‡, 6.45‡, 6.50‡, 10.0.
India							
VUD3 (Delhi)	9.590	31.28	1.30, 4.50.				
VUD4	11.830	25.36	9.0 a.m., 1.30, 4.50, 6.15.				
VUD3	15.290	19.62	9.0 a.m.				

It should be noted that the times are BST—one hour ahead of GMT—and are p.m. unless otherwise stated. The times of the transmission of news in English in the B.B.C. Short-wave Service are given on the preceding page.

* Saturdays only. ‡ Saturdays excepted. † Sundays only. ‡ Sundays excepted.

Designing a Modern Superheterodyne

Investigation of AVC and Distortion in a Reflexed IF Stage

(Concluded from page 227 of September issue)

By R. G. D. HOLMES,

A.M.I.E.E.

IN the calculations on sensitivity the speech diode is working at a very low level, thus damping the secondary of the last IF transformer to a much greater extent than would be the case under normal listening conditions. In this respect it is worth noting when taking selectivity measurements that the speech diode should be worked at as high a level as possible without AVC commencing, that is, at about 4 volts RF input, and the audio output should be set to a suitable level by means of the manual volume control.

Against this it should be remembered that commencement of AVC increases the damping on the primary of the last IF transformer, but to a much smaller extent.

If we consider signals which produce small diode voltages (i.e. those producing quadratic rectification) as "not worth receiving," the "Q" of the last IF transformer, before AVC commences (A), and well after AVC starts (B), can be calculated as follows:—

(A) Primary impedance $Z_1 = 0.9, 0.3$ and 0.187 megohm in pll. = 0.102 megohm.

Secondary impedance $Z_2 = 0.265$ and 0.25 megohm in pll. = 0.128 megohm.

Dynamic $R = \sqrt{Z_1 \cdot Z_2} = 114,000$ ohms.

$C = 170 \mu\mu\text{F}$. $Q = R\omega C = 57.8$.

(B) AVC diode now conducting, therefore additional damping on primary $\frac{1}{2} R = 0.5$ megohm.

Primary $Z_1 = 0.9, 0.3, 0.187$ and 0.5 megohm in pll.

= 0.085 megohm.

$Z_2 = 0.128$ megohm.

Dynamic $R = \sqrt{0.085 \times 0.128} = 109,000$ ohms.

$Q = 55.3$

It can be seen, therefore, that the difference of "Q" is negligible and that the selectivity suffers only slightly from the AVC diode loading.

By far the worst effect due to delayed AVC is that signals about the threshold value cause serious modulation distortion. This distortion will be maximum when the peak value of the unmodulated signal is approximately equal to the delay voltage, because

during the negative half of a low-frequency cycle no current is passed by the diode, but on the positive half-cycle the diode conducts and the primary of the IF transformer is consequently damped. Since this damping depends upon signal strength it is difficult to make an exact calculation of the resulting distortion of the audio-frequency voltage. However this distortion falls off rapidly with larger signals.

Measurements of harmonic distortion were taken at 1,000 c/s using a beat frequency oscillator with a band-pass filter and harmonic analyser. The distortion of the output valve alone was first measured at different levels and the following results obtained:

Output Watts	0.25	0.5	1.0	2.0	3.0
Total Distortion (per cent.) ...	1.38	2.0	2.8	3.9	7.3

These measurements were made at the secondary of the output transformer with a resistive load.

RF Input (microvolts)	Up to 5,000	10,000	20,000	50,000	100,000	200,000	300,000	500,000
Output (milliwatts)	0	0.1	0.15	0.3	0.6	1.3	2.0	3.2

Since the DC bias on the driver valve varies between 2 and 11 volts, depending upon the strength of the received signal, it was necessary to make some measurements to verify that under these conditions the valve does not produce any additional distortion. Measurements were taken of the complete audio amplifier at 3 watts power output, with RF signal input to the receiver varied from the threshold of AVC to a maximum of 0.5 volt.

Aerial Input (microvolts)	Distortion (per cent.) at 3 watts
100	5.2
200	5.2
300	5.2
400	5.1
500	5.1
1,000	5.1
2,000	5.0
5,000	5.0
10,000	5.0
100,000	5.7
500,000	5.2

It will be seen that the distortion does not increase with additional AVC bias.

Large aerial signals bias back the IF valve towards "cut-off" where the $I - V_a$ characteristics become closer, and since the signal on the IF grid is also increasing anode rectification takes place. As we have an audio load in the anode circuit of this valve, the rectified signals are passed through the coupling condenser straight into the output valve grid. This means that a large signal would produce an audio output even when the volume control is set at zero.

Measurements were taken of input signal against output power to see how bad this effect is with the connection to the slider of the volume control taken off and earthed, thus preventing signals rectified by the diode getting to the audio amplifier grid. The following results were obtained:—

It can be seen that a powerful local transmitter can produce an output of only 3.2 milliwatts when the volume control is set at zero, which cannot be considered as objectionable. These measurements were taken after the AVC had been adjusted to meet the other two more important conditions previously mentioned, that is, half AVC to this valve.

However, to see if any improvement of rectification could be obtained with another value of AVC, a test was carried out varying the amount of AVC to the IF valve by means of a calibrated potentiometer inserted in place of the 1 megohm AVC load resistance, the slider of which fed the IF valve, and the AVC voltages were taken with a sensitive electrostatic voltmeter. The aerial input was adjusted to 0.5 volt, measurements were taken of power output and AVC voltages against the amount of

Designing a Modern Superheterodyne — AVC fed to the IF valve. The following table shows the results:—


Fraction of Total AVC on IF Valve	AVC Volts IF Valve	AVC Volts on Frequency Changer	Power Output (milliwatts)
0	0	23.0	1.3
0.1	2.2	22.0	3.4
0.25	5.0	20.5	2.6
0.28	5.6	20.0	2.4
0.5	10.0	19.5	3.2
0.75	12.5	17.5	5.4
1.0	16.5	16.5	9.0

It can be seen from this table that the greater the proportion of AVC fed to the IF valve the less the total AVC becomes. This is fed directly to the frequency changer and consequently the slope of the frequency changer increases and a larger signal arrives at the IF valve grid: this can be seen to give a larger power output due to rectification.

A glance at the curve of Fig. 9 plotted from this table shows that the power output rises to a peak of 3.4 milliwatts when 0.1 of the AVC is applied to the IF valve, then falls to a trough at 0.28 and after that steadily rises to a maximum of 9 milliwatts when the full AVC is applied.

An analysis was then made to find the reason for the peak at 0.1 of the AVC. A low-loss "acorn" valve voltmeter was inserted across the input to the IF valve and a signal of 0.5 volt applied to the aerial. The AVC to the IF valve was adjusted to 0.1 of the total by means of the calibrated potentiometer and the peak of 3.4 milliwatts was noticed on the output meter. The IF transformer was retrimmed to allow for the small added input capacity, and the signal appearing on the grid was 0.45 volt peak. The total grid bias (AVC plus cathode circuit) was measured and found to be 4 volts.

Fig. 9. Power output due to rectification plotted against fraction of AVC fed to IF stage. Slider of volume control disconnected and earthed. Aerial input 0.5 volt RMS.

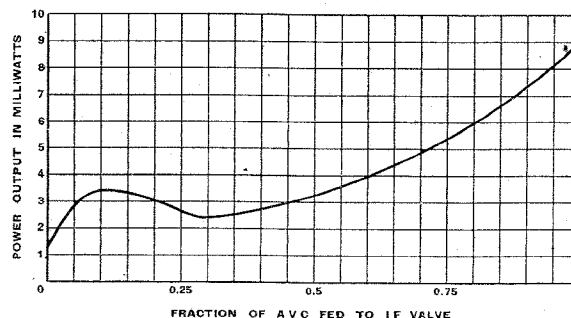

The IF valve being of the "variable- μ " type can be considered as two valves in parallel, the first having a very short grid base and the second a long grid base. At a point where these two meet there is an irregularity in the V_g-I_a characteristic, this takes place at -4 volts.

The V_g-I_a characteristic was taken at this point under dynamic conditions,

that is, with the screened grid voltage held constant with an external battery source. Grid bias points were taken each side of -4 volts up to a value equal to a peak carrier voltage of 0.54. This characteristic is reproduced as Fig. 10.

Using the "5 Point Analysis" ¹ the DC component can be obtained containing up to the fourth harmonic by the formula $-\frac{1}{3}(h+2n)$ this will then be $-\frac{1}{3}(0.11+0.06) = -0.057$ mA. When the carrier is modulated, the steady value of the DC component will vary in amplitude about this mean value by plus and minus the percentage modulation.

It is this alternating component of the anode current which develops the rectified output across the 10,000 ohm anode load. In our case the modulation $m = 0.3$. Hence the RMS value $= E_r = m \times \text{DC component} \times 0.707 \times 10,000 = 0.3 \times 0.057 \times 10^{-3} \times 0.707 \times 10^4 = 0.12$ volt.

This figure agrees fairly closely with the value of 0.13 volt RMS which was found necessary to produce 3.4 milliwatts output.

Conclusion

In conclusion, it can be seen that quite a reasonable receiver can be produced having all the advantages claimed, providing the following points are considered:—

(A) Cathode circuit of Output Valve.

It is important that the lowest audio-frequencies should be bypassed effectively since the voltage developed across this resultant impedance undergoes an amplification of 20 times in the driver valve. This trouble could

must be large compared with the grid input capacity to avoid attenuation of intermediate frequency, yet its reactance at the highest audio-frequency must be high as compared with the grid leak, for together they form a potentiometer at audio-frequencies.

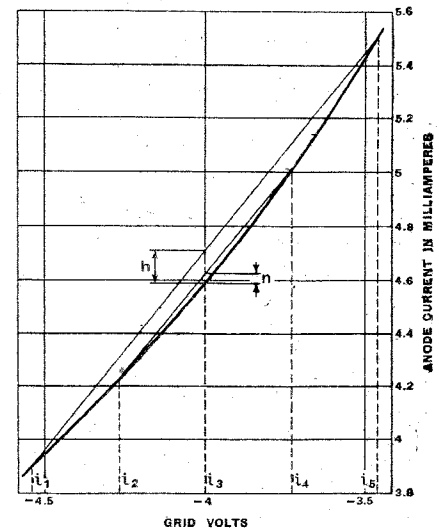


Fig. 10. Illustrating method of calculating rectification in the IF stage.

(C) Anode Bypass Condenser (IF Valve)

This again has to be a compromise, it must be large enough effectively to bypass IF to earth, yet its reactance must be high as compared with the anode load with which it is in parallel, so as not to attenuate high audio-frequencies.

(D) Application of AVC Voltage to IF Valve.

The application of AVC to the IF valve is arranged to meet three conditions:—

(1) Because this valve amplifies both audio and IF frequencies, forward and backward AVC control is obtained and the amount of AVC fed to this valve should be adjusted to give a constant output irrespective of the input signal: this was found to be approximately half the AVC voltage.

(2) As this valve has to handle the largest IF signal, it must not be allowed to overload, otherwise serious distortion, as described in the text, will occur. The amount of AVC is chiefly governed by this consideration, and if condition (1) can be satisfied while retaining the requirements of this case, so much the better.

(3) With an audio load in the anode circuit any rectification taking place in the valve is passed on to the output valve grid. This requires that the fraction of AVC applied to the IF stage should be as small as possible (see Fig. 9).

be eliminated by combining the diodes with the IF amplifier, rather than with the output valve.

(B) IF Input Condenser (Grid of EF9)

The value of this condenser has to be a compromise. The capacity

¹ "Distortion in Valves with Resistive Loads" by A. Bloch. *The Wireless Engineer*, Dec. 1939.

SHORT-WAVE BROADCASTING STATIONS

Arranged in Order of Frequency

Some of the stations listed are of comparatively low power, while others, owing to their geographical position, operating frequencies and times of working, are heard in this country only under extremely favourable conditions. They are, however, included in order that the list may be as comprehensive as possible. Moreover, the ever-changing world situation brings into prominence overnight stations which to-day are of little or no interest.

It should be pointed out that owing to the demands upon our space it is not anticipated that this list will be repeated for some time. Any major changes will be noted in our pages.

Station	Call Sign	Mc/s	Metres	kW	Station	Call Sign	Mc/s	Metres	kW
49-Metre Band (6.000-6.200 Mc/s)					31-Metre Band (9.500-9.700 Mc/s)				
Moscow (U.S.S.R.)	RNE	6.000	50.00	20-100	British Oversea Service	GSU	7.260	41.32	10-100
Colon (Panama)	HP5K	6.005	49.97	—	Lisbon (Portugal)	CSW8	7.260	41.32	10
Rangoon (Burma)	XYZ	6.007	49.94	10	Madras (India)	VUM2	7.270	41.27	10
Pretoria (South Africa)	ZRH	6.007	49.94	5	Delhi (India)	VUD2	7.290	41.15	10
Pernambuco (Brazil)	PRAS	6.010	49.92	—	Salisbury (Rhodesia)	—	7.317	41.00	—
Sydney (Nova Scotia)	CJGX	6.010	49.92	—	Moscow (U.S.S.R.)	RWG	7.360	40.76	20-100
Moscow (U.S.S.R.)	BW96	6.030	49.75	20-100	Pointe-à-Pitre (Guadeloupe)	FG8AH	7.440	40.32	—
Hsinking (Manchukuo)	MTCY	6.030	49.75	20	Moscow (U.S.S.R.)	RKI	7.520	39.89	20-100
Lourenco Marques (Mozambique)	CR7AA	6.035	49.71	10	Moscow (U.S.S.R.)	—	7.545	39.76	20-100
Moscow (U.S.S.R.)	—	6.040	49.67	20-100	Cairo (Egypt)	SUX	7.865	38.14	10
Boston (U.S.A.)	WRUL	6.040	49.67	50	Rio de Janeiro (Brazil)	PSL	7.955	37.72	—
British Oversea Service	GSA	6.050	49.59	10-100	Moscow (U.S.S.R.)	RIA	8.070	37.17	20-100
Philadelphia (U.S.A.)	WCAB	6.060	49.50	10	Kweiyang (China)	XPSA	8.484	35.36	—
Antananarivo (Madagascar)	—	6.063	49.48	—	Casablanca (Fr. Morocco)	CNP	8.795	34.11	—
Motala (Sweden)	SBO	6.065	49.46	12	Moscow (U.S.S.R.)	—	9.010	33.30	20-100
Toronto (Canada)	CFRX	6.070	49.42	—	Libreville (Fr. Eq. Africa)	PHK	9.320	32.19	—
British Oversea Service	GRR	6.075	49.38	10-100	Lima (Peru)	OAX4J	9.340	32.12	—
Vancouver (Canada)	CPKX	6.080	49.34	—	Geneva (Switzerland)	HLB	9.345	32.10	20
Lima (Peru)	OAX4Z	6.082	49.32	15	Dakar (French W. Africa)	FGA	9.405	31.90	—
Nairobi (Kenya)	VQ7LO	6.083	49.31	1	Ica (Peru)	OAX5C	9.430	31.81	—
Penang (Malaya)	ZHI	6.090	49.26	2.5	British Oversea Service	GRU	9.450	31.75	10-100
Pereira (Colombia)	HJFK	6.090	49.26	—	Moscow (U.S.S.R.)	—	9.465	31.70	20-100
Toronto (Canada)	CROX	6.090	49.26	—	Ankara (Turkey)	TAP	9.465	31.70	20
Cape Town (South Africa)	ZRK	6.097	49.20	5	St. John's (Newfoundland)	VONG	9.482	31.64	—
Moscow (U.S.S.R.)	—	6.100	49.18	20-100	31-Metre Band (9.500-9.700 Mc/s)				
British Oversea Service	GSL	6.110	49.10	10-100	Moscow (U.S.S.R.)	—	9.500	31.58	20-100
Saigon (French Indo-China)	FZR	6.116	49.05	12	Chungking (China)	XGOY	9.500	31.58	35
Hsinking (Manchukuo)	MTCY	6.125	48.98	20	Bangkok (Thailand)	HS8PJ	9.500	31.58	10
Moscow (U.S.S.R.)	—	6.130	48.94	20-100	Mexico City	XEWVW	9.503	31.57	10
Noumea (New Caledonia)	FK8AA	6.130	48.94	—	British Oversea Service	GSB	9.510	31.55	10-100
Moscow (U.S.S.R.)	—	6.140	48.86	20-100	Moscow (U.S.S.R.)	RW96	9.520	31.51	20-100
British Oversea Service	GRW	6.140	48.86	10-100	Pretoria (South Africa)	ZRG	9.523	31.50	5
Hull (U.S.A.)	WBOS	6.140	48.86	50	Hong Kong (China)	ZBW3	9.525	31.49	2.5
Winnipeg (Canada)	CJRO	6.150	48.78	2	Schenectady (U.S.A.)	WGEO	9.530	31.48	100
Teheran (Iran)	EQB	6.155	48.74	14	Moscow (U.S.S.R.)	—	9.530	31.48	20-100
Quebec (Canada)	—	6.160	48.70	—	Treasure Island (U.S.A.)	KGEI	9.530	31.48	20
Schwarzenburg (Switzerland)	HER3	6.165	48.66	25	Calcutta (India)	VUC2	9.530	31.48	10
Penang (Malaya)	ZHP2	6.175	48.58	2.5	Tokio (Japan)	JZI	9.535	31.46	50
Lima (Peru)	OAX4G	6.180	48.54	15	Motala (Sweden)	SBU	9.535	31.46	12
Saigon (French Indo-China)	—	6.180	48.54	12	Suva (Fiji)	VPD2	9.535	31.46	—
Schenectady (U.S.A.)	WGEO/O	6.190	48.47	50/100	Hsinking (Manchukuo)	MTCY	9.545	31.43	20
Vatican City	HVJ	6.190	48.47	25	Moscow (U.S.S.R.)	—	9.550	31.41	20-100
Aihlone (Ireland)	—	6.190	48.47	—	Vatican City	HVJ	9.550	31.41	25
Lima (Peru)	OAX45	6.190	48.47	—	Bombay (India)	VUB2	9.550	31.41	10
Lisbon (Portugal)	CS2VD	6.200	48.39	—	Bandoeng (Dutch E. Indies)	YDB	9.550	31.41	1.5
La Paz (Bolivia)	CP5	6.200	48.39	—	Perth (Australia)	VLW2	9.560	31.38	—
Ica (Peru)	OAX1A	6.335	47.35	—	Lima (Peru)	OAX4T	9.562	31.38	15
Santa Clara (Cuba)	WOHI	6.450	46.51	5	Hull (U.S.A.)	WBOS	9.570	31.35	50
Geneva (Switzerland)	HBQ	6.675	44.94	20	Madras (India)	VUM2	9.570	31.35	10
Bandoeng (Dutch E. Indies)	PMH	6.720	44.64	1.5	Montevideo (Uruguay)	CXA2	9.570	31.35	5
Cairo (Egypt)	SUR	6.784	44.24	—	Manila (Philippine Islands)	KZRM	9.570	31.35	—
Managua (Nicaragua)	YNOW	6.850	43.80	—	British Oversea Service	GSC	9.580	31.32	10-100
Kweiyang (China)	XPSA	6.980	42.98	—	Melbourne (Australia)	VLR	9.580	31.32	2
British Oversea Service	GRS	7.065	42.46	10-100	Cincinnati (U.S.A.)	WLWO	9.590	31.28	75
Valladolid (Spain)	FETI	7.070	42.43	—	Delhi (India)	VUD3	9.590	31.28	10
Tangier (Spanish Morocco)	—	7.090	42.31	—	Philadelphia (U.S.A.)	WCAB	9.590	31.28	10
British Oversea Service	GRT	7.150	41.96	10-100	British Oversea Service	GRY	9.600	31.25	10-100
41-Metre Band (7.200-7.300 Mc/s)					Moscow (U.S.S.R.)	RAL	9.600	31.25	20-100
Moscow (U.S.S.R.)	—	7.200	41.67	20-100	Cape Town (South Africa)	ZRL	9.606	31.23	5
Moscow (U.S.S.R.)	—	7.210	41.61	20-100	Panama City	HP5J	9.610	31.22	2.5
Calcutta (India)	VUC2	7.210	41.61	10	Sydney (Australia)	VLQ	9.615	31.20	—
British Oversea Service	GSW	7.230	41.49	10-100	San José (Costa Rica)	TIPG	9.620	31.19	—
Bombay (India)	VUB2	7.240	41.44	10	Bogota (Colombia)	HJCT	9.630	31.15	—
Singapore (Malaya)	ZHP3	7.250	41.38	20	Chungking (China)	XGOY	9.635	31.14	35
Tokio (Japan)	JVW	7.257	41.34	50	Taihoku (Formosa)	JFO	9.636	31.13	—
					Buenos Aires (Argentina)	CXA14	9.640	31.12	7.5

Servicing Equipment and Its Uses

Part IV.—Special Tools and Appliances

By "SERVICE"

In this, the last article of this series, the author shows how small tools can be of great assistance in making easier much of the newcomer's work in radio servicing.

SPECIAL tools play a very important part in the efficient and expeditious servicing of modern radio receivers. For example, even with the most accurate and expensive of oscillators best results cannot be obtained unless correctly designed trimming tools are used for adjusting the various trimmers.

The chief consideration in a trimming tool is the amount of metal work which is allowed to come within the field of the components comprising the tuned circuit which is to be trimmed, and, although in a large number of cases a very small amount of metal may be tolerated, in UHF circuits even the smallest amount will not enable an accurate setting of the trimmer to be made. One has to employ guesswork by over-adjusting a trimmer so that when the trimming tool is removed the circuit is more or less lined up to its proper frequency. Such a method cannot be tolerated nowadays.

A difficulty which confronts those who have to work on receivers of various makes is that there are several types of trimmer screws and methods of adjusting trimmer condensers. Some have screws, others nuts, while yet a third variation comprise the two and employ a nut which adjusts one trimmer of a IF transformer, while a concentric screw inside the nut adjusts the second trimmer of the transformer.

For this type of trimmer arrangement the box-spanner combination tool has to be used so that the nut may be rotated to the desired position and maintained in that position while the screw is adjusted.

An extra-short trimmer screwdriver is handy for use where it is possible to adjust the trimmer while the chassis of the receiver is in its cabinet. It is not always possible to carry out this operation without having to withdraw the chassis from the cabinet.

It must be emphasised that trimming tools are by no means robust, and, while being entirely satisfactory

for the job for which they were designed, they will not stand up to such jobs as forcing trimmers which have been sealed with wax, which should first have the wax broken by unscrewing the trimmer screw with an ordinary screwdriver.

Many recent radio and television chassis incorporate tubular condensers in which the two elements are made up of a metal rod sliding through, but insulated from, a metal tube. By pushing the rod in or out of the tubular element the capacity of the arrangement may be varied. When the correct position of the sliding element has been ascertained, it is fixed into position by a lock-nut.

A tubular condenser trimming tool generally comprises a long, hollow box spanner which will adjust the locking nut and a long, thin metal rod having one end in the form of a hook. This is inserted down the hollow box spanner and the hook engaged in a hole in the sliding element of the tubu-



Fig. 1. Tool for adjusting the springy blades of old-type switches.

lar condenser. By means of the box spanner the lock-nut is slackened and the sliding element of the condenser is adjusted in or out by means of the hooked tool. When the correct position has been found, the box spanner is used to tighten up the locking nut, and the operation is completed.

Another extremely useful tool is what is sometimes termed an inductance trimming tool. It comprises a piece of square insulation material about the length of a pencil with a point at one end with three or four slots cut into the body of the tool at various angles. The purpose of the tool is to enable wiring to be gripped in the slots of the tools and moved

about so as to overcome troubles due to interaction between the wiring, which gives rise to such faults as hum, RF, instability, etc.

Some short-wave receivers have loops in the wiring which form part of the tuned circuits, and the loops have to be in a certain position to obtain maximum efficiency. The inductance trimming tool enables these adjustments to be carried out while the set is "live," and without any hand capacity effects due to the proximity of the operator's hand to the wiring.

In short-wave receivers the disposition of the internal wiring is of great importance, and the results obtained from an instrument may be far below standard merely because a length of wiring in a grid circuit is too near other wiring or the metal chassis. Instability can also be caused by such derangement of the wiring, and a proper tool is necessary to ascertain the effect of moving the wiring.

This little tool is also very useful for investigating intermittent faults. Leads may be pushed or pulled about, soldered joints may be pushed or tapped, and such-like investigations made to locate the causes of intermittent failures in receivers.

Other small tools with which the newcomer should become acquainted are switch adjusting tools. In a great number of receivers manufactured before the advent of rotary wave-change switches, flat-bladed Post Office type switches were used. In some types of receivers these switches are very inaccessible, so that the contact blades cannot be reset to the correct tension without practically removing the complete switch assembly from the chassis.

Weak contact pressure is a fault quite distinct from that of dirty contacts, which may often be corrected by the application of switch-cleaning liquid. Weak contact between switch

Servicing Equipment and its Uses

blades can only be corrected by the resetting of the blades. To accomplish this satisfactorily a switch-adjusting tool is necessary and a typical example is illustrated in Fig. 1. Another type may be seen in Fig. 2. This type is useful for adjusting the flat springs which con-

to vary as the tuning wand is dipped into the coil. If the particular coil is accurately trimmed the output from the receiver will decrease, no matter which end of the tuning wand is used.

If, however, inserting one end of the wand increases the output from the receiver, this implies that trim-

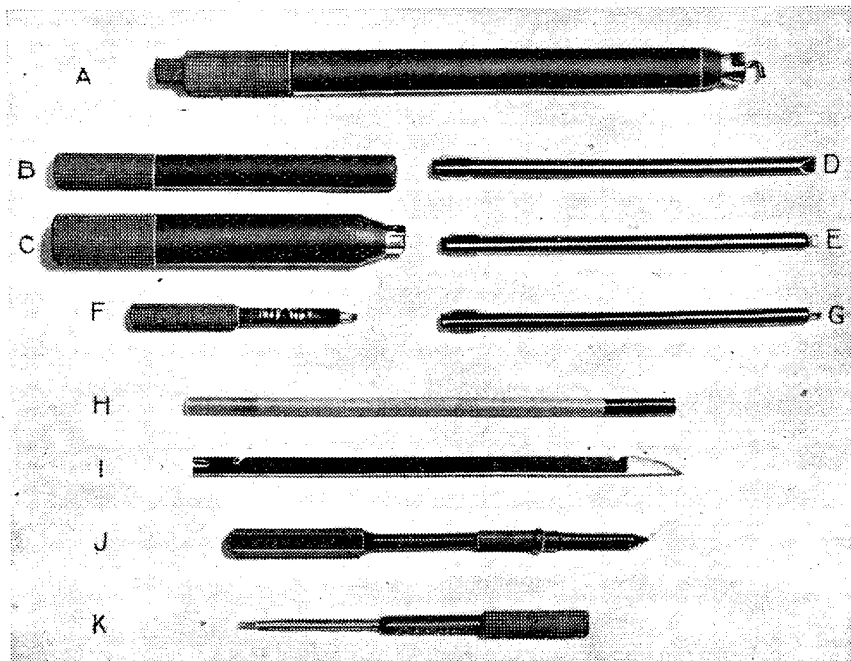


Fig. 2. Trimming and other tools. A, Tubular condenser trimming tool; B, handle for D and E; C, hollow box spanner for adjusting trimmers fitted with lock nuts; D, fibre trimmer shaft for ultra-HF trimmers; E, metal-tipped trimmer shaft for normal trimmers; F, short tool for trimmers in confined spaces; G, special metal-tipped trimmer shaft with very narrow blade; H, tuning wand; I, short-wave inductance trimming tool for adjustment of wire loop trimmers and wiring; J, friction drive tool for certain types of iron-cored inductances; K, motor spring adjusting tool.

trol the switch contacts on tuning motors.

A useful small tool, quite unnecessarily shrouded in mystery in some quarters, is the tuning wand. It enables the user to determine whether a circuit requires retrimming, always provided that it is possible to insert the wand into the coil former. In appearance the tuning wand resembles a pencil before it is sharpened. Its ends are either differently coloured or they are left plain, one end being brass and the other of a dark iron-dust composition.

Inserting the brass end into a coil former lowers the inductance of the coil and should put that coil circuit "off-tune." Inserting the iron end of the wand into a coil will increase its inductance and should also put it "off-tune." When a service oscillator is connected to a receiver and the output of the receiver is fed into an output meter, the output will be seen

trimming can be improved. If inserting the brass end increases the output from the receiver the trimmer capacity must be reduced, while if the receiver output increases when the iron-dust end of the tuning wand is inserted into the coil, then the trimmer capacity must be increased. Alignment is therefore correct when a decrease in output is obtained whichever end of the wand is inserted into the coil former.

So that beginners may recognise these small tools when they are met with, a representative collection of them is shown in Fig. 2. Although one or two of them are applicable only to the needs of a particular manufacturer's receivers, the majority of the tools are of general use.

In addition to trimming tools the well-equipped service workshop will have a full complement of spanners, feeler gauges, scrapers, etc., for loudspeaker servicing. Fig. 3 illustrates a

typical kit of loudspeaker tools in which the various items are enumerated; their uses are as follows: (1) Ring gauges for the alignment of the pole plate and centre pole of electro-magnetic speakers. (2) Adhesive for the fastening of the periphery of cones to cone chassis where this method of cone edge suspension is employed. (3) Spanners for adjusting small nuts as used for holding Paxolin spiders on the underside of speaker cones. (4) Hexagonal box spanners for the manipulation of nuts and bolts holding pole plates to magnet yoke systems, etc. (5) Feeler gauges for insertion between speech coils and the centre pole piece to assist in the re-centring of cones. The gauges are non-magnetic so that they may be used with permanent magnet loudspeakers as well as with energised types. (6) Scraper for removing old suspension and fixing materials from cone chassis before making a replacement. The edge of the scraper may be used as a knife to rip away old cones. (7) Plasticine for the removal of metallic filings from permanent magnet pole pieces. (8) Tweezers for regaining small washers, nuts, etc., dropped near the coil spider and for clearing foreign matter from the pole gap, etc.

The ring gauges are very helpful when reassembling loudspeakers after a field coil has been replaced. The pole plate, which acts as a yoke completing the magnetic field from the two side members of the magnet assembly, has a centre hole which accommodates the top of the centre pole piece. As the latter has a smaller diameter than that of the hole, there is a gap surrounding the centre pole in which the speech coil of the cone operates, and it is essential that the centre pole be absolutely concentric with the hole in the pole plate. If it is not it will be impossible properly to centre the speech coil in the gap; even if it appears to centre properly it is quite likely that it will foul the pole pieces after the speaker has warmed up, thus giving rise to distortion after a period of operation.

By selecting the correct gauge for the type of speaker being serviced, assembly of the pole pieces is simplified and the time taken for the operation considerably reduced. The gauge is merely inserted into the gap and the bolts holding the pole plate to the loudspeaker field assembly tightened up. When the gauge is removed the gap is ready to receive the speech coil of the cone assembly.

At this stage, however, trouble can still occur if the coil is not accurately centred so that it lies equidistant from

Servicing Equipment and its Uses

the centre pole and the edge of the hole in the pole plate. This is where the feeler gauges facilitate the replacement of the cone, and Fig. 4 shows how they are used.

By inserting three or four feelers between the centre pole piece and the inside of the moving coil it is only a matter of screwing up the nuts holding the spider in order correctly to centre the cone. This procedure takes only a fraction of the time necessary with the method of moving the cone up and down and listening for any rubbing of the coil against the pole pieces.

Modern loudspeaker units have such small clearances that the eye cannot be depended upon for centring the moving coil in its gap. Some types of speakers have the speech coil winding on the inside as well as the outside of the speech coil former and care should be taken when inserting feeler gauges to see that no damage is done to the internal winding.

Feeler gauges are extremely helpful when replacing cones in speaker units where the periphery of the cone is held to the metal cone chassis by adhesive.

A scraper may be employed as a knife to rip round the old cone as near as possible to the speaker chassis. The major part of the cone then being out

movement of the speech coil while the adhesive is drying.

With the feeler gauges in position, the suspension material may be manipulated until the cone is suspended with equal tension all round its periphery so that there is no undue pull in any one direction. This can be ascertained by removing the feeler gauges every now and again to see whether the speech coil remains in position. If it does the feeler gauges can be put back into place and the speaker put on one side for the adhesive to dry out.

Having learnt how to use service equipment the beginner must acquire the habit of looking after his gear, and a few hints in this direction may prove of value.

Analysers, or any multi-range meters, should always be left adjusted to the highest voltage range if they have no definite "OFF" position. This will prevent many a burnt-out meter, which can easily happen when the leads of the instrument are thoughtlessly applied to a source of high voltage before the range of the meter has been selected.

This point may appear to be hardly worth mentioning, but the writer repeats this warning from personal experience. There are often times after a heavy period of fault-finding when we develop mental tiredness and are

Never leave an analyser or ohmmeter which contains internal batteries on the low-resistance measuring range. In many instruments the low-resistance range derives its potential from a potentiometer connected across a dry cell. Thus the cell is delivering current all the time it is switched to that range, no matter whether the test leads are connected to a resistance or not. Therefore, once more the advice

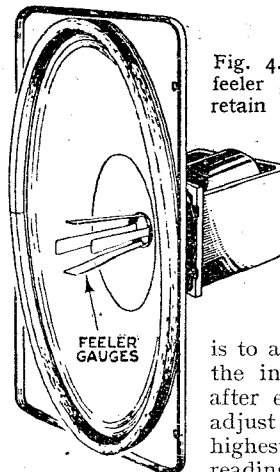


Fig. 4. Use of feeler gauges to retain a speech coil in position.

is to always switch the instrument off after every test or adjust it to its highest voltage reading range.

Service oscillators are very robust these days, but, nevertheless, they should be treated kindly in order to preserve as long as possible their original calibration. Valve replacements may slightly alter calibration on some older types of instruments, but in more recent designs valve replacements affect the calibration very little, if at all.

When it is known that an instrument is out of calibration, but the manufacturers are unable to overhaul it owing to their war commitments, then the oscillator readings should be compared with those from one which is known to be up to standard and which could be borrowed for an evening while tests are carried out. It is not necessary to take a great number of readings and to prepare new charts. Just a few of the most-used calibration points should be compared and a note made on the existing chart as to the error at that point. This can then be allowed for whenever the oscillator is used.

It has not been possible in this short series of articles to cover every point concerning service equipment and accessories about which the beginner would like to have information. It is hoped, however, that the articles have been of value to newcomers and will have helped them to overcome their initial lack of confidence in handling service equipment and assisted them to obtain a better understanding of their work.

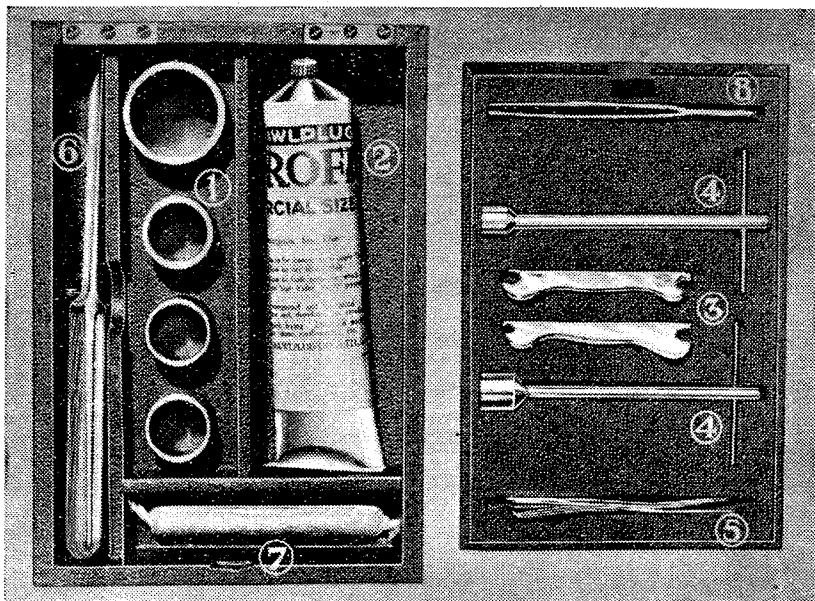


Fig. 3. Appliances for loudspeaker repairs.

of the way, the scraper may be used to remove pieces of cone material and old adhesive still fixed to the chassis. The new cone can then be fitted after having applied adhesive to the chassis, and the feeler gauges will prevent any

apt to do things unthinkingly. If the habit has been formed of always resetting the meter to its "OFF" position, or to its highest voltage range, lapses of memory will not have any serious effects.

LETTERS to the EDITOR

The Editor Does Not Necessarily Endorse the Opinions of His Correspondents

Compulsory Interference Suppression

I SUBMIT that the time for the authorities to introduce compulsory ignition interference suppression is now. I understand that most Service vehicles are already suppressed, and so no difficulty would arise about them when they pass into civilian use after the war. So far as private cars are concerned, many are laid up, and so the hardship imposed would be less than in peacetime.

Compulsory suppression is desirable not only in the interests of television—when it restarts after the war—but to give a fair chance for new uses for short and ultra-short waves to be developed.

“SERVICE ENGINEER.”

Tunbridge Wells.

Standardisation

I HAVE just read with interest “Diallist’s” comments upon the differences that exist between English and American wire gauges, drill sizes, etc.

I am in complete agreement with his suggested proposals, but would point out that his conclusions regarding the use of the “jar” as a measure of capacity are not quite correct.

In this connection I would refer your contributor to a paragraph of the Prefatory Note to the 1940 edition of the “Admiralty Handbook of Wireless Telegraphy,” where it is stated: “In order to bring the unit of capacity into line with commercial practice, the use of the jar as the Service unit of capacity has been discontinued (A.F.O. 1552/37). It is to be considered as obsolescent for a few years, the farad and its sub-multiples gradually replacing it as the practical unit of capacity for standard use in the Service.”

Incidentally, while on this question of standardisation, only a very small though extremely useful addition need be made to the English Standard Resistor Colour Code to bring it into line with its American counterpart. I refer here to the “dot” system of additional “O’s.” Whereas the British system does not extend any further than six noughts, indicated by a blue dot, the American system includes up to nine noughts indicated by a white

dot. Admittedly this is merely a minor point, but it is only by attending to all these small differences that the complete alignment of the British and American standards can be brought about. K. BEAUCHAMP.

Stoke, Coventry.

Receiver Servicing

IF I may be permitted to make some comments on the letters of Messrs. Hosking and “P. Q.” in the September issue, I will refer especially to the whole of the last sentence of Mr. Hosking’s letter and to the first of that of “P. Q.” The impression one gets is that they consider any criticism of the practice of servicing and reference to unethical behaviour “an unwarranted attack” on a pure and blameless profession. To put it bluntly, this sounds, to a fellow-professional, like unconvincing cant. Your correspondents would hardly deny that there are honest men and knaves in radio servicing, as in every other branch of human affairs. The virtuous indignation of the honest men at any doubt cast on the status and honour of their profession affords, unfortunately, excellent cover for the knaves. I have little doubt that a number of petty profiteers will be very grateful to these correspondents. They would, I feel, have done better had they been less zealous in displaying the particular instances of their own probity and quicker to admit frankly what every technician knows—that the radio service game, with its exceptional opportunities for profiting unethically by the general public’s ignorance and the absence, in this branch of commercial radio, of discipline and organisation, that strongly attract a certain type of “business” acumen, is far from clean. They should urge the adoption of obvious methods of cleansing it, to lengthen this letter with expositions of which is hardly necessary. Their attitude is, unfortunately, fairly common in commercial radio; I would point out that so long as they persevere in it, so long will incompetence and unscrupulousness continue to exploit the protection it affords—to the disadvantage of the pockets and reputations of honest men like themselves.

W. H. CAZALY.

Post-war Amateur Transmission

HERE are my suggestions for licensing conditions after the war.

Code test to be raised to 20 w.p.m. It will be a very poor operator who cannot do 20 after the war. Mild theory test at local P.O.

No phone tickets except for 5 metres.

No inter-G contacts except on 5 and 160 metres.

No high-power tickets.

To discourage piracy, no AA tickets and no transmitting valves to be sold except on production of a licence.

Ten minutes to be maximum time allowed for each QSO, and time to be shared according to the following timetable. I am assuming that, in addition to the G2, 3, 4, 5, 6, 8 call-sign prefixes, we will have G1, 7 and 9 after the war.

Mondays: G1, G2, G3, G4, G5 stations use only 40, 80 and 150 metres, while G6, G7, G8, G9 use 5, 10 and 20 metres.

Tuesdays: G1—5 use 5, 10 and 20 metres, while G6—9 use 40, 80 and 160 metres. And so on for the remaining weekdays.

On alternate Sundays G2, 4, 6 and 8s would change round with G1, 3, 5, 7 and 9s in using the 40, 80, 160 or 5, 10, 20-metre bands.

WILLIAM MORRIS ex G4HU.

Romiley, Cheshire.

Should Amateurs Know Morse?

I WOULD like to add a few comments on the letter in your September issue, by Mr. H. W. Haydon. Serving as a radio operator at sea for nearly three years before the war and at present engaged on radio work of national importance, I hope to take out my first amateur radio licence at the end of the war. I feel sure that if morse qualifications are not made a condition for obtaining a licence, then the babel of pre-war days will be increased ten-fold.

Regarding your correspondent’s first point that well-qualified and scientific workers are barred from obtaining a licence because they are forced to learn morse, I would like to mention that, together with a number of schoolfellows, I succeeded in reaching twelve words per minute when I was only about thirteen years old, in a period of about four months. If schoolboys can achieve this, surely a qualified and therefore presumably intelligent person can do as well if not better.

For the second point that morse should be abandoned as a nuisance, surely your correspondent realises

that in the band-width of 10 kc/s occupied by a telephony transmitter dealing with audio frequencies only up to 5,000 c/s, at least ten CW transmitters can be accommodated without interference, providing a suitable crystal band pass filter receiver is used. In view of the limited spectrum available for the large number of amateurs, it looks as though it would be better to condemn telephony rather than telegraphy on the grounds of being a nuisance.

I do not think that any experienced operator would agree that the theoretical knowledge of radio is a sufficient qualification for allowing the operation of a radio station. For proof of this, I suggest that, when peace returns, your correspondent listen on any of the "shared" commercial bands and see the difficulty which an inexperienced operator can unwittingly cause.

Finally, should it at any time become necessary for amateurs to perform a service of national importance in emergency, as they have so often done in the United States, I pity the poor operator who can only read "phone" trying to copy an urgent message with a howling gale or thunderstorm in progress.

No, I do not think it is a question as to whether there shall be "morse or no morse," but more a question as to whether our post-war amateurs shall be efficient, competent and skilled men, or whether they shall be a band of "chin-waggers."

"J. B. T."

MORSE requires less power than telephony and is more reliable than the microphone when accuracy is essential. We are all familiar with the pitfalls of telephony due to misunderstanding of pronunciation, with consequent requests for repetition.

The international Morse code minimises the difficulties of those with a limited knowledge of foreign languages. To waive the morse qualification would limit the scope of the R.S.G.B. and lessen the usefulness of the P.M.G.'s licence.

Surely those who have attained a high standard of technical and scientific knowledge should not find it difficult to qualify in morse.

C. G. WISDOM.

108, Novar Drive, Glasgow, W.2.

Circuit Diagrams

THE secretiveness regarding technical information that appears to have been the traditional policy of British domestic radio trade and industry has, I believe, been positively harmful commercially (especially as

regards foreign trade in British-made apparatus) and certainly an unnecessary nuisance to both amateur and professional technicians who do not actually work in or own shops or factories. It is partly responsible, too, I think, for the distressing amount of technical ignorance that is being revealed in the training establishments of the Services in this war. Admittedly, the retailers have to obey the behests of the manufacturers and wholesalers, so it is not their fault that they withhold technical information from their customers. But surely now is the time, as never before, when the mystery about domestic radio should be dispelled by the issue, with each receiver sold, of a plain circuit diagram and table of technical data.

"TECHNICIAN."

Recording Blanks

IN response to my appeal (August *Wireless World*) for details of methods of re-coating direct recording blanks a number of letters has reached me, amongst which I would particularly acknowledge those of D. Elmore, W. G. Corderoy and D. Roe.

Mr. W. H. Pierce, in the September issue, has contributed a most informative description of a method of making a gelatinous type blank, so I will only offer suggestions for producing blanks of the nitro-cellulose, *i.e.*, so-called cellulose-acetate, and synthetic resin thermo-setting types.

For renovating cellulose-coated blanks the following two methods have met with some success: (1) High-grade cellulose-thinners is applied liberally, in a dust-free atmosphere, to the surface of the used discs and, after a time, the old grooves will collapse and if left for about 24 hours a new surface is produced. The results with this process depend on the freedom from dust and the evenness of the applications of cellulose-thinners. (2) Pour a quantity of amyl-acetate with a spot of camphor on to the blank rotating at about 10 r.p.m. and then efface the old grooves by radial movements with a 1-in. camel-hair brush. The blank is then left on the turntable or placed on the level elsewhere to enable gravity and surface tension to act in producing a new surface.

The following is an account of some experiments in producing new synthetic resin blanks, using glyptal or alkyd type resins. The resin is applied in a suitable solvent to a plain aluminium or zinc base as the disc rotates at about 5 r.p.m. in a horizontal plane. This rotation is continued until the layer has air-dried and will no longer "run" and is "tack-free." The grooves can then be cut in the

The "Fluxite Quins" at work



"There's a loud speaker round about 'ere
That keeps saying things mighty queer,
I've just fixed that set

With FLUXITE and yet—
There it goes! Once again! Can you hear?"

See that **FLUXITE** is always by you—in the house—garage—workshop—wherever speedy soldering is needed. Used for 30 years in Government works and by leading engineers and manufacturers. Of Ironmongers—in tins, 4d., 8d., 1/4 and 2/8.

Ask to see the **FLUXITE SMALL-SPACE SOLDERING SET**—compact but substantial—complete with full instructions, 7/6.

Write for Free Book on the art of "soft" soldering and ask for Leaflet on **CASE-HARDENING STEEL and TEMPERING TOOLS** with **FLUXITE**.

TO CYCLISTS! Your wheels will NOT keep round and true unless the spokes are tied with fine wire at the crossings AND SOLDERED. This makes a much stronger wheel. It's simple—with **FLUXITE**—but IMPORTANT.

THE FLUXITE GUN


is always ready to put Fluxite on the soldering job instantly. A little pressure places the right quantity on the right spot and one charging lasts for ages. Price 1/6, or filled 2/6.

FLUXITE LTD.
(Dept. W.W.),
BERMONDSEY
STREET, S.E.1

ALL MECHANICS WILL HAVE

FLUXITE

IT SIMPLIFIES ALL SOLDERING



Letters to the Editor—

layer and subsequently hardened by baking.

Two glyptal resins, Paralac 2001 and 3101, of Imperial Chemical Industries, Ltd., have been tried. With Paralac 2001 it was found necessary to dilute the material (a 50 per cent. solution of solid resin in "Cellosolve") with an equal bulk of diluent, such as a mixture of equal parts of methylated spirit and toluene, or equal parts of butyl alcohol and xylene. Taking the figure of 50 per cent. solid resin in the original solution it is possible to calculate the volume of diluted solution required to give a dried layer 0.005 to 0.007 in. thick on any size blank. The air-drying process is unfortunately a lengthy one as it takes two or three

weeks before the surface is absolutely "tack-free" and hard enough for cutting, after which it can be "stoved" for one hour at 120 to 125 deg. C., when a hard permanent surface is produced.

Paralac 3101 is slightly less viscous than the 2001 but it still requires the same diluent. The preliminary air-drying may be accelerated in both cases by a short bake at around 100 deg. C., but great care must be taken to ensure that the surface is not allowed to harden too much. It should be noted that unnecessarily thick films of lacquer are not satisfactory as bubbles form during the baking and spoil the surface.

DONALD W. ALDOUS.

Torquay, Devon.

Dyed-in-the-Wool

RECENTLY one of the officers who are my accomplices in the present job of work fell sick. As we were already short-handed, I put in for a stop-gap to help us out. Through came a telegram that Lieutenant Oldsweat had been attached to my establishment for all purposes and ordered to report to me for duty forthwith. And late on a dark and rainy night he turned up, having travelled more than a hundred miles in one of those blessed "utility" light vans that so well earn their name. Grand fellow, long row of medal ribbons, keen as mustard. When I'd given him an outline of the work he'd have to do we went over to the mess, and the Mess waiter was commanded to "bring out the Bass." (Yes, we had a few precious bottles.) At that moment the telephone rang. Signals officer asking if wireless communications were satisfactory. What my newly joined officer heard as my end of the conversation was something like this: "Field strength at — is hopeless . . . if you'll raise that aerial at — to 60ft., I believe you'll do it. . . . Yes, but what about sticking in an extra amplifying valve?" When I hung up, my latest acquisition enquired, with a knowing look in his eye, whether I was a wireless man. "Guilty," sez I; "and you?" I learned that he was a real old dyed-in-the-wool radio fanatic. Made his own variable condensers (any of you remember the tip for straightening out the vanes when you'd cut them out with a pair of tinsnips, by using a nearly red-hot flat-iron?), valve holders and grid leaks in the days when such things, if obtainable at all, cost certainly their weight in silver.

Chinwagging

With a start like that we naturally got down to real wireless talk, and presently I found that he was amongst the keenest of keen DXers. A further discovery was that he was a correspondent of mine of many years' standing. I didn't let on at first that I was "Diallist," though at length it had to come out. Anyway, we had the most soul-satisfying chinwag on wireless—a real joy after months spent without meeting any genuine long-distance enthusiast. This was the prelude to many other jolly talks and to some amusing adventures on the short waves with the "only receiver available—an "all-wave" broadcast set, with the coarsest of coarse tuning arrangements on its SW band. Like so many old hands, he'd

RANDOM RADIATIONS

Wire and Watts

TILL the other day I'd no idea how hard it was to get some kinds of wire just now. I wanted two or three ounces of No. 34 enamelled copper wire to rewind the small induction motor of an electric fan. DCC in that gauge I had in plenty; but that wouldn't do, for it occupied too much space. The bakelite case surrounding the motor is so small that you can't get enough turns on to the coils unless enamelled wire is used. I've tried shop after shop without success and given it up as a bad job. But there's a way out of the difficulty, which you may find useful if a fan or other small domestic appliance of yours becomes a casualty. This particular fan is of American make. The case is marked "200-250 volts. Current 0.4 amp." Now, it struck both the Signals Instrument Mechanic, who was doing the job for me, and myself that 80-100 watts was a pretty large ration for a small fan and that 0.4 ampere was more than was good for No. 34 wire. We resolved to do some experimenting, and what we found was this: Coils wound with No. 32 wire could be made to contain sufficient turns for the efficient working of the motor, but, naturally, they heated up too much, owing to the heavier current passed. Therefore an ordinary lampholder was wired in series with the fan motor and lamps of various wattage were tried. To our surprise, we found that the fan would run at adequate speed (and keep perfectly cool) with a 60-watt lamp in series. One concludes that some, at any rate, of the smaller and

By "DIALLIST"

cheaper American-made fans pass far more current than is necessary and burn out—I've had more than one that met its end in this way—because the load is too heavy for the windings. When I get the time I'm going to make experiments with the series lamp and other fans. If you don't want the light of the lamp you can always paint the bulb over with black japan enamel and regard it purely as a resistor.

**Butting In**

THE antics of the fellow who daily messes up the transmissions of the Deutschlandsender have been most amusing. Doubtless you've heard him at work. One presumes that Moscow No. 1 must be used for the purpose, though I have no certain information; Russia may well have several stations whose power can be increased, when the need arises, to a formidable figure. Whatever else the interrupter may have accomplished, he has certainly made the German broadcasting authorities do a bit of thinking and has largely succeeded in spoiling their long-wave programmes as serious entertainments. The musical programmes at the time of writing are extraordinary affairs: without an instant's pause, a singer succeeds a pianist and an orchestra the singer. If any hitch gives an interval of more than a second or two the voice that has now become so famous chips in with one of his pointed remarks.

built every receiver he'd ever used until a short time before the war broke out. So had I, and we discussed the respective merits of heaps of famous *Wireless World* sets that we'd made up—and, of course, improved upon!

Improvements!

TALKING of improvements reminds me of a very unkind cut once delivered to me. At the request of her family, I once designed and had made up for an old lady a completely fool-proof set that really did deliver the goods in the shape of two alternative programmes, but could not be made to commit the then unforgivable sin of interfering with neighbours' reception by causing squeals; it couldn't energeise its own aerial because it was so designed that it was impossible to make it oscillate. The only controls were two switches. One turned the set on; the other, if in one position, brought in Station A at fine strength. In the other position it caused the alternative Station B to come in equally well. Some months later friends who lived near the old lady complained bitterly that she was ruining their reception' by producing squeals that ran up and down the musical scale interminably. "Impossible," I said; "she couldn't do it with her set if she tried." I thought, though, that I might as well investigate, and did so. I found that a week or two before the set had packed up—a burnt-out valve, I learned later—and that, "not liking to trouble me," the old lady had called in a local ser-

vice man. He had at once proceeded to "improve" the set by adding (a) a tuning arrangement to enable the whole MW band to be covered, and (b) a reaction control knob. The set had thus become far from foolproof, and the dear old soul had been playing the dickens with reception in the vicinity by her misguided endeavours to find the "silent point between squeals." I had the set put back again to its original form, and all was well. But I wonder how many receivers have been ruined by the "improvements" made in them by enthusiasts whose keenness on results outran their skill as designers!


The Wireless Industry

A NEW moving-coil microphone has been introduced by the General Electric Co., Ltd., Magnet House, Kingsway, London, W.C.2. It is housed in a sloping desk cabinet with a control key and is eminently suitable for message-broadcast centres. The impedance is 15 ohms and the list price is £4 4s.

W. T. Henley's Telegraph Works Co., Ltd., Milton Court, Westcott, Dorking, Surrey, announce that owing to restrictions in the supply of materials the "Handyman" 65-watt "Solon" electric soldering iron has been withdrawn. Industrial models, including 65, 125 and 240 watt types, are still available.

A second (revised) edition of the brochure describing the HS1/HS2 transmitter has been issued by Standard Telephones and Cables, Ltd., Connaught House, Aldwych, London, W.C.2.

VORTEXION
50w. AMPLIFIER CHASSIS

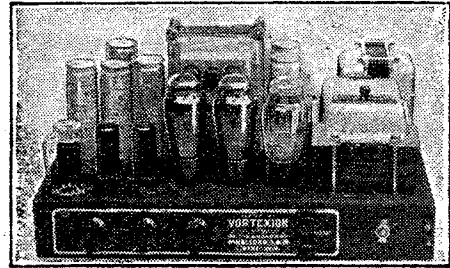


A pair of matched 6L6's with 10 per cent. negative feed-back is fitted in the output stage, and the separate HT supplies to the anode and screen have better than 4 per cent. regulation, while a separate rectifier provides bias. The 6L6's are driven by a 6F6 triode connected through a driver transformer incorporating feed-back. This is preceded by a 6N7, electronic mixing for pick-up and microphone. The additional 6F5 operating as first stage on microphone only is suitable for any microphone. A tone control is fitted and the large eight-section output transformer is available in three types:—2-8-16-30 ohms; 4-15-30-60 ohms or 15-30-125-250 ohms. These output lines can be matched using all sections of windings and will deliver the full response (40-18,000 c/s) to the loud speakers with extremely low overall harmonic distortion.

- CHASSIS with valves and plugs..... £17 10 0
- Goodmans P.A. Speakers in stock.
- Papier Mache Horn Speakers..... £6 6 0
- Moving Coil Microphones..... £5 5 0
- Chromium Microphone Stands from..... 15 0

Many thousands already in use

15w. AC & 12-VOLT DC AMPLIFIER

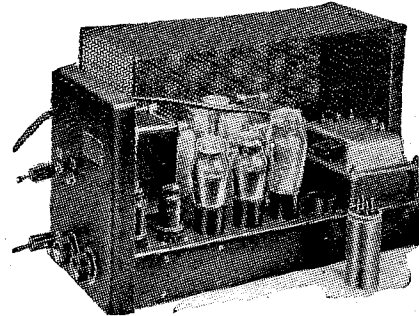

TYPE CP20

This small Portable Amplifier operating either from AC mains or 12-volt battery, was tested by "THE WIRELESS WORLD," October 1st, 1937, and has proved so popular that at Customers' demand it remains unaltered except that the output has been increased to 17.2 watts and the battery consumption lowered to 6 amperes. Read what "The Wireless World" said:—

"During tests an output of 14.7 watts was obtained without any trace of distortion so that the rating of 15 watts is quite justified. The measured response shows an upper limit of 18,000 c/s and a lower of 30 c/s. Its performance is exceptionally good. Another outstanding feature is its exceptionally low hum level when AC operated even without an earth connection. In order to obtain the maximum undistorted output, an input to the microphone jack of 0.037 volt was required. The two independent volume controls enable one to adjust the gain of the amplifier for the same power output from both sources, as well as superimpose one on the other or fade out one and bring the other up to full volume. The secondary of the output transformer is tapped for loud speakers or line impedances of 4, 7.5 and 16 ohms." Prices:

- AC and 12-volt CHASSIS with valves, etc. £12 12 0
- AC only CHASSIS with valves, etc. £8 18 6

Gauze Case for either chassis, 12/6 extra.

Plus 20% War Increase.

Delivery: Prompt delivery on "Priority 1A" orders.

Vortexion Ltd., 257, The Broadway, Wimbledon, S.W.19. Phone: LIBerty 2814

BOOKS ON WIRELESS

issued in conjunction with "The Wireless World"

	Net Price	By Post
"FOUNDATIONS OF WIRELESS," by A. L. M. Sowerby, M.Sc. Third Edition revised by M. G. Scroggie, B.Sc., A.M.I.E.E.	6/-	6/6
"RADIO LABORATORY HANDBOOK," by M. G. Scroggie, B.Sc., A.M.I.E.E. Second Edition Revised and Enlarged ...	10/6	11/1
"WIRELESS SERVICING MANUAL," by W. T. Cocking, A.M.I.E.E. Sixth Edition Revised and Enlarged ...	6/-	6/6
"HANDBOOK OF TECHNICAL INSTRUCTION FOR WIRELESS TELEGRAPHISTS," by H. M. Dowsett, M.I.E.E., F.Inst.P., M.Inst.R.E. Seventh Edition in preparation ...	25/-	25/9
"WIRELESS DIRECTION FINDING," by R. Keen, B.Eng. Hons. Sheffield, A.M.I.E.E. Third Edition ...	25/-	25/9
"RADIO DATA CHARTS," by R. T. Beatty, M.A., B.E., D.Sc. Second Edition ...	4/6	4/11
"TELEVISION RECEIVING EQUIPMENT," by W.T. Cocking, A.M.I.E.E.	8/6	9/-
"RADIO INTERFERENCE SUPPRESSION," by Gordon W. Ingram, B.Sc.	5/-	5/4
"LEARNING MORSE." Eighth Edition ...	6d.	7½d.
"RADIO DESIGNER'S HANDBOOK," Edited by F. Langford Smith, B.Sc., B.E.	8/6	9/1
"THE WIRELESS WORLD" GREAT CIRCLE PROJECTION MAP ...	2/-	2/3

Obtainable from Leading Booksellers and Railway Bookstalls or by post (remittance with order) from


ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1

RECENT INVENTIONS

A Monthly Selection of the More Interesting Radio Developments

PHASE-ADJUSTING CIRCUITS

A CURRENT fed to the terminals T, T₁ is split between the two branch circuits L, R, LA, C and C₁, R₁, LB, C₂ respectively. If the values of L and C₁ are suitably chosen, and the condensers C and C₂ correctly set, the currents flowing in the two circuits can be brought into phase quadrature. The two amplitudes can also be made equal by equating the values of the reactances. Finally, if R is made equal to the inductive and capacitive reactances, the two currents will remain substantially in phase quadrature over a comparatively wide variation of the input frequency.

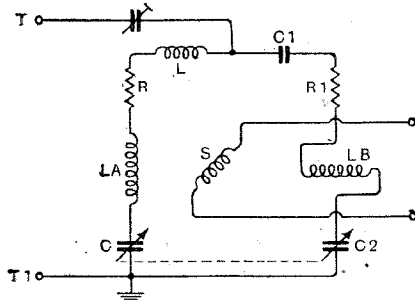

Method of counteracting interference from nearby transmitters.

The two coils LA and LB are set at right-angles to each other, as in a goniometer, so that a rotating field is set up between them. An output current of any desired phase relation can then be drawn off from a pick-up coil S pivotally mounted between the two field coils LA and LB.

If, for instance, the terminals T, T₁ are fed by a voltage tapped off from the oscillatory circuit of a transmitter, the voltage derived from the coil S can be injected into the circuits of a nearby receiver, so as to neutralise or balance-out any direct interference both as regards amplitude and phase.

Marconi's Wireless Telegraph Co., Ltd. (Assignees of W. van B. Roberts). Convention date (U.S.A.) July 30th, 1938. No. 530407.

PUSH-BUTTON ADAPTER

A NUMBER of units, each designed for a preselected wavelength, are compactly housed in a thin flat box, which is then attached to one of the walls—or preferably below the base of the cabinet of a standard wireless receiver, so as to adapt the latter for push-button tuning. The connections necessary to substitute one or other of the fixed elements in place of the ordinary tuning condenser of the set are taken from the top of the adapter and through the bottom of the cabinet.

The particular unit to be inserted in

circuit is controlled by a series of buttons mounted on the forward edge of the adapter box. One of the buttons brings the variable tuning condenser into circuit when it is desired to use ordinary manual control. Each of the switch-tuned elements is made semi-variable so that the selected wavelength can be adjusted as desired.

Telefunken Co. Convention date (Germany) May 6th, 1938. No. 528916.

PREVENTING "FLUTTER"

IN a multi-band superhet set, where the local oscillator valve is supplied from the same anode-voltage source as the audio-frequency amplifier, there is a noticeable tendency, particularly when using the set for short-wave reception, for interaction to occur between the two valves in question, and to result in an undesirable "fluttering" of the oscillator valve. This can, in practice, be prevented by inserting suitable filter circuits in the anode-supply, but since it is necessary to use large-value condensers of the electrolytic type the remedy is an expensive one.

As an alternative it is now proposed to use a two-stage AF amplifier and to couple the stages together by a circuit which produces a different phase-shift as the signals fall above or below a certain critical frequency. There is a common cathode impedance, and the arrangement is such that for signals above a particular frequency the feedback is positive, whilst

AERIAL COUPLINGS


WHEN a receiver is coupled to an aerial of the so-called anti-static type through a transmission line, it is difficult to match the impedance of the line to that of the aerial over a wide band of frequencies—covering say the short, medium and long waves—without using a complex and expensive form of coupling network.

According to the invention, the usual two-wire feed line is replaced by two similar pairs of feeders. One two-wire feeder is coupled directly to the long-wave coil in the aerial circuit, and the other two-wire feeder is coupled directly to the medium-wave aerial coil. The short-wave coupling is made through a "phantom" circuit which is tapped across the mid-points of the primary coils of the two separate feeders. The "phantom" circuit can be coupled either to a short-wave aerial coil, or to a separate dipole aerial. The arrangement ensures a matched impedance coupling on all three wave-bands.

Philips Lamps, Ltd., and J. B. Kaye. Application date June 30th, 1939. No. 530220.

"SCRAMBLED" TELEVISION

THE Figure shows a television transmitter in which the picture to be transmitted is focused on to the sensitive screen S of a cathode-ray tube T, where it is scanned by the electron beam from the gun of the tube. An auxiliary cathode-ray tube A is, however, used to

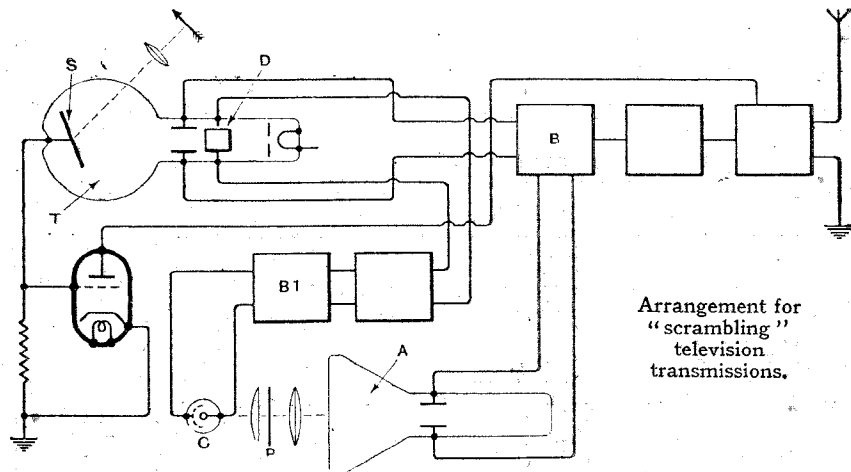

for signals below that frequency the feedback is negative. This provides a stabilised circuit free from the defect first mentioned.

Marconi's Wireless Telegraph Co., Ltd. (Assignees of M. C. Jones). Convention date (U.S.A.) April 30th, 1938. No. 528632.

impart a certain irregularity to the scanning process, which, in effect, renders the transmission secret except to a properly equipped receiver.

The beam of the auxiliary tube A is controlled by the time-base unit B so as to scan a control plate P. This is marked with lines which are irregularly spaced

in a predetermined pattern. The spacing of the lines, in turn, controls the impulses sent by a photo-electric cell C to the time-base unit B1 which is coupled to the deflecting plates D of the transmitting tube T. The result is that the line synchronising signals are not radiated regularly but follow the deliberately imposed pattern on the plate P. Such signals will be secret except to a receiver fitted with a duplicate of the control plate used in transmission.

Scophony, Ltd., and A. H. Rosenthal. Application date March 6th and 17th, 1939. No. 530776.

RADIO COMPASS

TWO pairs of directive aerials, set at right-angles to each other, are coupled through phase-splitting circuits to a cathode-ray indicator. The signal from a non-directive aerial is added, in known fashion, to produce a rotating cardioid response on the fluorescent screen. Simultaneously, impulses derived through frequency changers from a master oscillator are applied to the control electrode of the indicator tube, and serve to mark out radial divisions corresponding to the normal marking of a compass scale on the same fluorescent screen, so that the latter shows the compass bearing of the incoming signal.

Marconi's Wireless Telegraph Co., Ltd. (Assignees of D. G. C. Luck). Convention date (U.S.A.) 30th June, 1938. No. 539979.

PIEZO-ELECTRIC OSCILLATORS



FOR generating frequencies of the order of 500 kc/s the cube type of crystal is generally superior to the plate type, particularly when high stability in spite of temperature changes is a chief consideration. The usual arrangement is to use the crystal to control a two-stage relaxation-oscillator, but this sometimes gives trouble by producing parasitic oscillations, particularly when used in connection with a bank of crystals to be switched from one operating frequency to another.

According to the invention, improved stability is obtained by using the crystal to control a single valve-oscillator of the cathode-coupled type, i.e., one in which the anode is reactively coupled to the cathode instead of to the grid of the valve. The control crystal is inserted in series with a balancing condenser, between the anode of the valve and earth, so that it is in parallel with the tuned back-coupling circuit. One of the crystal electrodes is connected to the grid, the other to the anode or to earth.

Marconi's Wireless Telegraph Co., Ltd., and G. P. Parker. Application date July 12th, 1939. No. 531639.

The British abstracts published here are prepared with the permission of the Controller of H.M. Stationery Office, from specifications obtainable at the Patent Office, 25, Southampton Buildings, London, W.C.2, price 1/- each.

COMMUNICATIONS DEPEND....

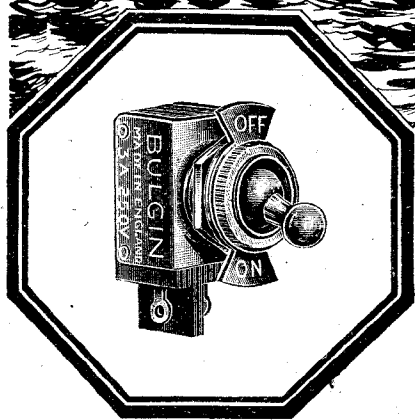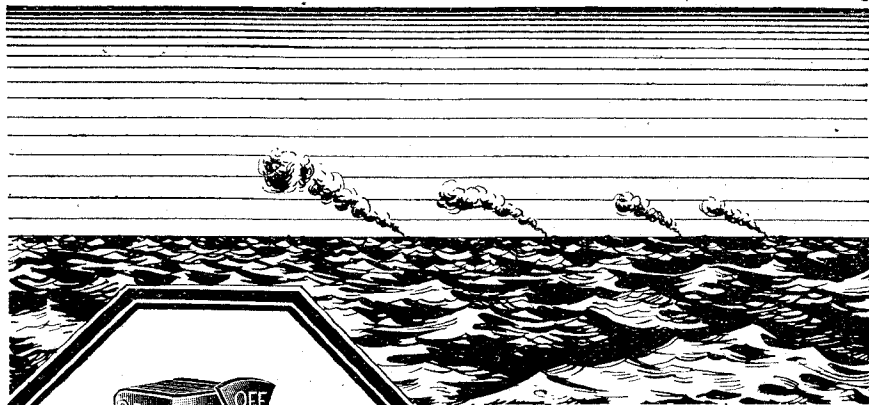

ON SMALL PARTS....

IN countless instances quite intricate pieces of apparatus are wholly dependent on the proved reputation and reliability of their component parts.

All products from the House of Bulgin are pre-eminent for superior design and workmanship, and every article bearing our Trade Mark has to pass exacting and exhaustive tests during the course of its production.

That is why every manufacturer of important standing incorporates Bulgin Components.

The Choice of Critics

BULGIN FOR SWITCHES

The best Radio and small Electrical Switches in the world. Every one is the finest of its class, and the best for any job. Snap-action, low and constant contact resistance, reliable performance for tens of thousands of operations: all these are permanent characteristics.

ALWAYS DEPEND ON



REGISTERED • TRADE • MARK

A. F. BULGIN & CO. LTD., BY-PASS RD., BARKING, ESSEX.

Telephone: RIPPLEWAY 3474 (4 lines).

UNBIASED

Thane of Cawdor

By FREE GRID

LIKE most other people, my time and that of my fellow scientists is largely occupied nowadays in digging for victory, although naturally our digging does not consist of actual delving into the soil like the unlettered masses, but of probing into the secrets of nature behind the locked doors of our laboratories. Since the only difference between an onion and a lump of coal lies in the number and arrangement of the electrons which constitute their respective atoms, it is not unnatural that many of the more prominent workers in the field which may be termed higher electronics are devoting their attention to this method of producing this offensively indigestible vegetable.

Such research work is not for me, however, as, whatever my faults, I have never been a slave to my stomach, and my digging for victory is on an altogether higher plane. It is, for obvious reasons, quite impossible for me to talk about my work. Modesty would forbid even if the censor didn't. You will, however, learn all about my doings when the honours list comes out at the conclusion of the war. It is not for me to say what honours will be bestowed on this or that person who has laboured in the wireless vineyard, but



"Glamis, Cawdor, Scotland, . . . all."

other people are not so cautious, and I am a little perturbed at a report which reached me the other day to the effect that Mrs. Free Grid has been seen seated before a mirror in the salon of a well-known Bond Street jewellers, trying on coronets.

It is not the fact of her trying on coronets that worries me so much, but from the information I have received it appears that she has set her heart on one ornamented with strawberry leaves. Women are ignorant as well as obstinate creatures, and I can

scarcely think that she can be aware of the fact that strawberry leaves are almost as strictly reserved as membership of the Jockey Club or the R.Y.S. I scarcely know what to do about it, and yet if I don't do something I shall eventually find myself in a serious mess, for Mrs. Free Grid's ambitions have much in common with those of the late-lamented Lady Macbeth. To quote the words of S. Walker, Esq., "What would you do about it, chums?"

Modern Methods of Mastering Morse

I WAS intensely interested in the article published in the June issue of this usually staid and sober journal in which it was stated that one method of improving your morse speed was to get slightly drunk.* Needless to say, I lost no time in ringing up the Editor to ask if special classes were being arranged. I obtained very little satisfaction, however, as, judging by the somewhat incoherent reply which I received, he was pre-occupied by the full-time task of improving his morse.


I, therefore, determined to put the idea into practice without delay to see whether there was anything in it, and looked about for a few pupils on whom to experiment. Being a leading member of the local temperance society I could not very well experiment in my own neighbourhood, and so I armed myself with a key and buzzer and set forth in my car—using my basic ration, of course—for the West End of London, and was soon explaining matters in the private room of the proprietor of several well-known night clubs and bottle-party rendezvous.

He proved very enthusiastic about the whole idea, and gladly gave me the free run of his establishments. I was, however, rather startled a few nights later to find that several of his places which had been incurring black looks from the police had been renamed, and were now known as "Morse Schools," and bore such legends as "Tuition by the latest method advocated by *The Wireless World*"; "Learn morse and help your Country."

**The Psychological Pause*, page 162, June, 1941.

I ventured a mild protest, but the proprietor speedily reassured me that no drunkenness beyond the "slightly" advocated in *The Wireless World* would be permitted, and promised to take six full-page advertisements in next month's issue to stress this point. It was, I fear, this thoroughly unscientific "slightly" which was the eventual cause of all the subsequent trouble with the police, and I am surprised at *The Wireless World* using it instead of stating so many "microfalstaffs" or whatever is the unit of drunkenness; to my mind it is equally as slipshod as defining the noise of a loud-speaker as "ever so loud" instead of stating a definite number of phons.

This gross lapse on the part of this journal makes me almost ashamed of my *Wireless World* tie, and I have been in two minds whether to do as I did with my German Orders and

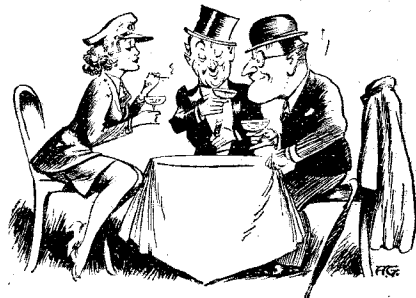

A Morse Instructress.

decorations at the outbreak of war, and return it to the Editor. I would indeed do so if I thought there was a chance of my getting back the eighteenpence I paid him for it. As it is, I have been going about lately with my new autumn overcoat (16 coupons) buttoned up to the neck in order to hide it.

All went well for a few evenings until certain people began to feel that they wanted to get beyond the beginners' stage and to make a spurt forward in their speed. Even then all might have been well if one of the more ardent pupils had not suggested that the electric horn of a car was an ideal morse buzzer, with the result that all the members of the more advanced class in one of these nocturnal "Morse Schools" went careering wildly through the West End in their cars morsing frantically to each other with their horns. One can hardly blame the police for the strong action which they took in the matter. But, as I have already hinted, the real cause of the whole unsavoury business is to be found in other and more august quarters.

Due to the partial destruction of our premises by accidental fire, we regret we are not able to accept orders at present.

The situation is well in hand and we expect to be in production again during the next few months.

GOODMANS

MAKERS OF HIGH GRADE LOUDSPEAKERS

GOODMANS INDUSTRIES, LTD., Lancelot Road, Wembley, Middlesex.

Phone: WEMbley 4001 (5 lines).

OVERALLS
PURCHASE DIRECT FROM THE MANUFACTURER
for **WOMEN** all **WORKERS**

The ideal protective garment for female workers, a smart practical bib and brace overall in heavy drill. Strong and durable, with adjustable straps and useful pockets. Stocked in all sizes in shades of Khaki, Bottle, Brown and Navy. This and several other types can be seen at our Showrooms, 39, Cheapside, E.C.2.

Strong, peaked caps as worn by model (centre) give full protection to hair and thus conform with B.O.T. regulations. On left is shown similar peaked cap fitted with net top, cool and comfortable but controlling all strands of hair. (Above) Mob cap or beret style, fitted elastic band, giving sense of security and comfort.


E. SHUTTLE & Co. Ltd.
Ashley Works, ASH ROAD, STRATFORD E.15

Treat yourself to this new radio experience

If it hadn't been for the war, you might to-day be the proud owner of a new radio—enjoying a fresh thrill from your listening. Well, here's an idea. For a fraction of the cost of a new set you can get



one of the latest Stentorian Extension Speakers. Install it in *any room you like* and then listen critically. The fine balance of tone, the vivid clarity of reproduction will delight you.



Cabinet Models from 21 G

It will give you a fresh interest to your listening and a new pride in your home.

Ask your dealer for a demonstration.



Stentorian

THE PERFECT EXTRA SPEAKER FOR ANY SET

WHITELEY ELECTRICAL RADIO CO., LTD., MANSFIELD, NOTTS.

PREMIER RADIO

DE LUXE S.W. KITS

Complete Kit, including all Valves, coils, wiring diagrams and lucid instructions for building and working. Each Kit supplied with a steel Chassis, Panel and plug-in coils to tune from 13 to 170 metres.

- 1-Valve Short-Wave Receiver or Adaptor Kit 24/6
- 1-Valve Short-Wave Superhet Converter Kit 28/-
- 2-Valve Short-Wave Receiver Kit 35/6
- Utility Micro Dials, direct and 100-1 6/6

SHORT-WAVE CONDENSERS

Trolitul insulation. Certified superior to ceramic. All-brass construction. Easily ganged.

15 m.mfd.	2/4	100 m.mfd. ...	3/-
25 m.mfd.	2/6	160 m.mfd. ...	3/7
40 m.mfd.	2/6	250 m.mfd. ...	4/-

ELECTROLYTIC CONDENSERS

16 + 24 525 v. Can. Neg., small type, 7/6; 25 mfd. 25 volt, 1/6; 15 mfd. 100 volt, 1/3; 8 mfd. 125 volt tubular, 1/6.

Rothermel Xtal Pick-up Heads, fit any Tone Arm, 34/9.

H.T. Eliminators, 150 v. 30 mA. output, 36/6; ditto, with 2 v. half charge, 46/6.

Potentiometers, all res., 3/6; ditto, with Switch, 4/6.

PREMIER MICROPHONES

Transverse-Current Mike. High grade large output unit. Response 45-7,500 cycles. Low hiss level, 23/-.

Moving Coil Mike. Permanent magnet model requiring no energising. Response 90-5,200 cycles. Output .25 volt average. Excellent reproduction of speech and music, 49/-.

Microphone Transformers. Suitable for all mikes. Tapped primaries: **A**, 20 and 40; **B**, 30 and 60; **C**, 50 and 100; **D**, 6/6 each.

Please Note.—All Short-wave Kits include Purchase Tax.

NEW PREMIER S.W. A.C. RECEIVER in response to many requests we have now produced an A.C. version of the popular Premier Short Wave SG3 Kit. Circuit: Pentode H.F. Stage, Pentode Detector, Pentode Output, and F.W. Rectifier. 200-250 v. A.C. Operation. Built-in Power Pack. Hum-free operation. For use with Phones or P.M. Speaker.

Complete Kit of Parts with drilled chassis, all components, Plug-in Coils covering 13-170 metres, 4 valves and full instructions **£6.14.6** and circuits

Battery Version also available, Kit £4/15/4.

★ "The Wireless World" said they were "very much impressed..."

See full Test Report, pp. 492-3, December issue. Send for details.

PREMIER SMOOTHING CHOKES

Type	Current	Henrys	Res.	Prices
C 40/500	40 MA	20-34 H	500 ohms	6/-
C 60/180	60 MA	8 H	180 ohms	6/-
C 60/400	60 MA	25-34 H	400 ohms	8/8
C 60/500	60 MA	18-30 H	500 ohms	8/8
C 100/400	100 MA	20-34 H	400 ohms	10/8
C 150/185	150 MA	20-34 H	185 ohms	15/4
C 200/145	200 MA	20-34 H	145 ohms	18/-
C 250/120	200 MA	25 H	120 ohms	20/-

PREMIER BATTERY CHARGERS FOR A.C. MAINS

Westinghouse Rectification complete and ready for use

To charge: 6 volts at 1 amp. 26/-

2 volts at 1 amp. 13/4 12 volts at 1 amp. 28/-

6 volts at 1 amp. 22/- 6 volts at 2 amp. 43/6

ALL ENQUIRIES MUST BE ACCOMPANIED BY 2d. STAMP.

ALL ORDERS LESS THAN 5/- 6d. POST EXTRA.

PREMIER 1941 HIGH FIDELITY AMPLIFIER KITS

Each Kit is complete with ready drilled chassis, selected components, specially matched valves and full diagrams and instructions.

- 4-watt A.C. Amplifier £3 11 6
 - 8-watt A.C. D.C. Amplifier £7 9 0
 - 16-watt A.C. Amplifier £9 8 0
- Completely Wired and Tested
- Black Crackle Steel Cabinet, 17/6 extra.

MAINS TRANSFORMERS

Wire-ends. All L.T. Windings Centre Tapped.

SP. 250	250-0-250 v. 60 m.a., 4 v. 1-2 a., 4 v. 2-3 a., 4 v. 2-2 a.	13/4
SP. 300	300-0-300 v. 60 m.a., 4 v. 2-3 a., 4 v. 2-3 a., 4 v. 2-3 a.	13/4
SP. 301	300-300 v. 150 m.a., 4 v. 2-3 a., 4 v. 2-3 a., 4 v. 1 a., 4 v. 1 a.	17/4
SP. 350A	350-350 v. 100 m.a., 5 v. 2 a. (not C.T.), 6.3 v. 2-3 a.	16/-
SP. 350B	350-350 v. 100 m.a., 4 v. 2-3 a., 4 v. 2-3 a., 4 v. 2-3 a.	16/-
SP. 351	350-350 v. 150 m.a., 4 v. 1-2 a., 4 v. 2-3 a., 4 v. 3-4 a.	17/4
SP. 351A	350-350-150 m.a., 4 v. 3 a., 4 v. 2-3 a., 4 v. 1 a., 4 v. 1 a.	22/-
SP. 352	350-350 v. 150 m.a., 5 v. 2 a., 6.3 v. 2 a., 6.3 v. 2 a.	18/-
SP. 811	300-300 v. 60 m.a., 4 v. 1 a., 4 v. 5 a., 4 v. 1 a.	8/11

Auto Transformers. Step up or down. 100-125 v. to 200, 230 or 250 v. A.C., 60 watts, 11/4; 125 watts, 15/-; 250 watts, 22/-.

L.T. Transformers, all C.T.

4 v. 2-3 a.	11/4	6.3 v. 2-3 a.	11/4
2.5 v. 5 a.	11/4	7.5 v. 3 a.	11/4
5 v. 2-3 a.	11/4	12 v. 3-4 a.	18/-

Push-Pull Driver Transformers 6/6

Universal Output Transformers, 11 Ratios. Single or Push Pull. 6/6

MATCHMAKER UNIVERSAL OUTPUT TRANSFORMERS

Will match any output valves to any speaker impedance. 11 ratios from 13:1 to 80:1, 5-7 watts 16/10, 10-15 watts, 21/10. 20-30 watts, 36/10. 60 watts, 49/6.

PREMIER RADIO CO.

ALL POST ORDERS to: JUBILEE WORKS, 167, LOWER CLAPTON ROAD, LONDON, E.5. (Amherst 4723.)

CALLERS to: Jubilee Works, or 169, Fleet Street, E.C.4 (Central 2833), or 50, High Street, Clapham, S.W.4. (Macaulay 2381.)

TELEVISION RECEIVING EQUIPMENT

By W. T. COCKING, A.M.I.E.E., of "The Wireless World"
Author of "Wireless Servicing Manual"

This new handbook contains comprehensive information offered in a concise manner for everyone interested in cathode-ray receiving equipment.

A full description is given of the complete vision and sound receiver, and the concluding chapters are devoted to tracing faults and making adjustments to it.

The treatment is substantially non-mathematical, although design formulæ has been included where necessary, largely for reference.

Size 7½" x 5" 300 pages. 167 illustrations and diagrams

PRICE 8/6 NET. By Post 9/1

ILIFFE & SONS LTD.

Dorset House, Stamford Street, London, S.E.1

Wireless Direction Finding

Deals with the principles of Wireless Direction Finding and gives an account of the circuits and apparatus used in its application to navigation. The Adcock Aerial has a separate chapter covering its principles, installation and performance. Shore, Ship and Aircraft installations, as well as a special section on the choice of a suitable site for the Aircraft Ground D.F., with Adcock Aerials are included. Also useful references to a selected list of some 600 of the more important contributions to the literature of D.F.

By R. KEEN, B.Eng.
(Third Edition)

A BOOK OF INSTRUCTION AND REFERENCE FOR ENGINEERS, TECHNICIANS, TELEGRAPHISTS AND OTHERS ENGAGED OR INTERESTED IN THE USE OF DIRECTIVE WIRELESS TELEGRAPHY FOR THE NAVIGATION OF SHIPS AND AIRCRAFT.

800 pages
550 illustrations
25/- net
By post 25/9

From leading Booksellers or direct from the Publishers:

ILIFFE & SONS LTD., DORSET HOUSE, STAMFORD STREET, LONDON, S.E.1

CLASSIFIED ADVERTISEMENTS. The charge is 6/- for each paragraph of 2 lines or less, and 3/- for every additional line or part thereof, average 7 words to a line. Each paragraph is charged separately.
ADVERTISEMENTS for the November issue are accepted up to First Post on Thursday, October 9th, at the Head Office, Dorset House, Stamford Street, London, S.E.1, or one day earlier at provincial Offices.


THE PROPRIETORS retain the right to refuse or withdraw advertisements at their discretion. They are not responsible for clerical or printers' errors although every care is taken to avoid mistakes. Cheques and postal orders should be made payable to Liffé & Sons Ltd. and crossed. Notes are legal tender and cannot be traced if lost in transit.

ADVERTISERS may have letters other than circulars, addressed to numbers at this office. The words "Box 000, c/o "WIRELESS WORLD" must be paid for and a further 1/- added for registration and forwarding replies.
DEPOSIT SYSTEM. Full particulars upon application to the Deposit Dept., "Wireless World," Dorset House, Stamford Street, London, S.E.1.

ESTD. L.R.S. 1925

KEEP YOUR SHELTER DRY!
 We can supply from stock if you order at once.

The 'Stuart' Centrifugal Electric SHELTER PUMP

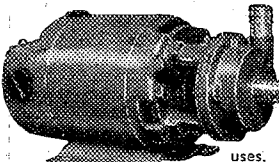

Quickly clears water from shelters. Ideal for many other A.R.P. uses. A sound job built for continuous running. Fan-cooled ball bearing motor, A.C. or D.C., any voltage. Low current consumption. May be plugged into lighting circuit. Connections for rubber hose. All parts non-rusting. Please state exact mains voltage required.

These pumps (as supplied to Railway Cos., County Councils, etc.) may also be used for garden fountains.

Fountain Jets 4/- extra.

No. 10.	100 gals. per hour (Carr. & Packing)	£5 2 6
No. 11.	280 gals. per hour (3' extra)	£6 6 0
No. 12.	560 gals. per hour (4' extra)	£7 14 0

Prices include foot valve and strainer. Pump is ready for immediate use.

We still have a few Morphy Richards Electric Fires available.

Send 2d. stamp for illustrated price lists of any item.
 Terms: Cash with order or C.O.D.

LONDON RADIO SUPPLY CO.
 (Proprs.: The L.R. Supply Co. Ltd.)
 All communications to evacuation address—
 "WINDEN," ARDINGLY RD., BALCOMBE, SUSSEX

ARMSTRONG

We still have many high grade Radio Components, which in times of Peace would be used in the construction of the well-known Armstrong chassis, and they will be offered from time to time to *Wireless World* readers. **THE COMPONENTS ARE ABSOLUTELY NEW AND PERFECT AND CARRY THE SAME GENEROUS 12 MONTHS GUARANTEE AS THE ARMSTRONG CHASSIS.** It is hoped to complete a list of these valuable parts, as soon as possible. In the meantime we are giving one or two examples as under:—

Genuine Low Loss 3 gang .0005 Tuning Condensers with Ceramic insulation, fitted with Dual Ratio Slow Motion Drive (reverse vernier) as fitted to our AV125 chassis, and can be used for any purpose where a high quality condenser is required. Price 17/6.

Glass Tuning Scales, 7 1/2 in. x 4 3/4 in., calibrated in Metres and Station Names. Various types to cover 2, 3 or 4 wavebands. Supplied with scale pan and fittings. Price 5/6. Glass Scale only, 3/6.

Latest type Wavechange Switches operated by Press Button mechanism of robust construction and practically everlasting in operation. Suitable for switching aerial and oscillator circuits on 4 waveband receivers or 3 wavebands and gramophone. The switch can be put to many other uses. Supplied complete with knobs and bronze escutcheon. Price 8/6.

Heavy Duty Yaxley type Rotary Switches, 6 pole 4 position. Suitable for switching R.F., aerial and oscillator circuits, 4 wavebands or 3 wavebands and gramophone. Price 7/6. A few special Yaxley type Switches for RF2PP coils. Price 12/6.

ARMSTRONG MANUFACTURING CO.
WALTERS ROAD, HOLLOWAY, LONDON, N.7
 Phone: NORTH 3213

NEW RECEIVERS AND AMPLIFIERS
 £18/10 Only.—"Wireless World" 2R.F. receiver, with push-pull quality amplifier chassis, 10 valves, including tone control stage, 8 watts triode output, ideal for quality reproduction from radio and gramophone, limited number; reduced price includes all valves.—Bakers Selhurst Radio, 75, Sussex Rd., South Croydon [9708]

RECEIVERS & AMPLIFIERS—SECONDHAND, ETC.
HALLICRAFTER Super Skyrider S.X.16, with speaker and 6 spare valves; £40.—Box 2592, c/o *The Wireless World*. [9702]

AMPLIFIER suitable for large factory, £50, cost over £200; also Avometer D.C., £6.—Nursery, Barking. Phone: Seven Kings 1323. [9723]

NATIONAL H.R.O. or 100X.A. also "S" meter, Hallicrafter S.X.25, S.X.17.—Price, details, 14, Common Rd., Evesham. [9711]

USED Three-wave Battery or Mains Receivers; top prices paid for good quality machines.—Tregunna, 15, High Cross St., St. Austell. [9721]

NEW or used Receivers, Amplifiers, Meters, Converters, Radio & Electrical Accessories. Very high prices paid for really clean apparatus.—Phone: Gerard 4447. [9696]

MICROPHONE Silver, Ilford, Scott or multi-valve equivalent radiogram console or chassis, sound sales tri-channel amplifier, Voigt corner speaker, Voigt pick-up, Telefunken T.O.1001 pick-up and tone control, Haynes or W.W. 2R.F. feeder, give very full details and price required.—Box 2594, c/o *The Wireless World*. [9720]

NEW MAINS EQUIPMENT
VORTEXION Mains Transformers, chokes, etc., are supplied to G.P.O., B.E.C., L.P.T.B.; why not you? Imitated, but unequalled.

VORTEXION, Ltd., 257, The Broadway, Wimbledon, London, S.W.19. Phone: Lib. 2814. [9571]

SHORT-WAVE EQUIPMENT
RADIOMART, largest distributors communication equipment, Birmingham, National distributors.—48, Holloway Head, Birmingham. [9555]

NEW LOUDSPEAKERS
BAKERS Brand New Surplus Speaker Bargains.

EVERY Music Lover Interested in Realistic Reproduction should write for free descriptive leaflet now.

£5/15; usual price £10.—Brand new permanent magnet infinite baffle speaker, complete with beautifully finished cabinet in polished walnut.

£2/15; usual price £5.—Brand new super quality triple cone speaker, permanent magnet model; exceptional bargain; limited number.

SECURE One of These Exceptional Bargains Now.

BAKERS Triple Cone Conversions Will Immensely Improve Reproduction of Your Present Speaker. ("For a few shillings you have converted a speaker scheduled for the scrap heap into one worth pounds.—W. E. Darby, Grad.I.E.E.") Write for details.

BAKERS SELHURST RADIO, 75, Sussex Rd., Sth. Croydon. [9709]

EPOCH—Genuine hand-made diaphragms, all models. "R.E.C.S." Crown St., Reading. Phone: 2796. [9717]

"GOODMAN 9" permanent magnet moving coil units fitted multi-ratio output transformers, very sensitive, excellent reproduction, new in original cartons, 22/6 each, carriage paid, cash with order.—P. & F., 49, John Bright Street, Birmingham, 1. [9693]

FERRANTI M1+ or M1 Super, or Goodmans Infinite baffle.—Box 2595, c/o *The Wireless World*. [9722]

WANTED. Voigt corner horn with or without unit.—104, Wheel Lane, Grenoside, Sheffield. [9701]

GRAMOPHONE EQUIPMENT
TABLE Type Twin Turntable (Metal) Garrard Universal Motor, M/I pick-ups, £14; or Piezo, £16.—Voigt, The Courts, Silverdale, S.E.28. [9718]

DE Luxe Model Simpsons Electric Turn Table, 230 v, 50 c.—Clark, "The Spinney," Wigan Lane. [9689]

VOIGT Horn, pickup, twin motor, record cabinet, local feeder.—Foy, Church St., Elsecar, Barnsley. [9725]

CABINETS
WE Regret That, owing to all our employees having joined H.M. Forces, we are unable to accept orders for cabinets except to callers. Limited stock only. We have a large stock of radio components.—H. L. Smith and Co., Ltd., 289, Edgware Rd., London, W.2. Tel.: Pad. 5891. [6683]

TEST EQUIPMENT
TEST Oscillator Kit Available Shortly; particulars on request.—MacLachlan and Co., Strathyre. [9726]

WESTON Analyzer and E692 Oscillator, complete with Adaptors in combination case. Best offer secures.—2, Birley Street, Bury, Lancs. [9692]

HUNTS' Signal Generator, £8; Avo. 70/-; Clough-Brengle analyzer, £8; mikes, turntables, speakers, transformers, valves, etc.—Box 2593, c/o *The Wireless World*. [9710]

Ode

Partridge No. 9

THE VOICE

A raucous voice pollutes the air,
 The German news is on,
 Preceded by a big fan-fare
 Ananias' in full song.

The thrilling deeds of noble Huns
 Are blazoned far and wide,
 It tells of Russians on the run
 And millions who have died.

"Our humane army (he's so bland)
 Are freeing from distress
 Those peoples of a dozen lands
 Once subject to duress."

And so on goes the fairy tale
 By this suave pretender,
 Then comes THE VOICE—the Nazis quail—
 Exit Deutschlandsender!

Poor Goebels who had held the stage
 'Till Russia lent a hand,
 Is captive in a "wireless cage"
 'Twxixt VOICE and blaring band.

Oh what a sad, sad man at heart,
 Oh what a shattered dream,
 The fruits of labour now are tart,
 THE VOICE has pinched the cream.

N. Partridge
 B.Sc., A.M.I.E.E.

King's Bldgs., Dean Stanley St., LONDON S.W.1
 Telephone: VICTORIA 5035

HOW TO USE THE CATHODE-RAY TUBE
 by J. H. REYNER, B.Sc., A.M.I.E.E.
 48 pages of practical information.
 Price 1/3 Post free

FURZEHILL LABORATORIES, LTD.,
 BOREHAM WOOD, HERTS.

This space reserved for



W. BRYAN SAVAGE LTD.

**ACOUSTICAL
AMPLIFIERS
TRANSFORMERS
P.A. EQUIPMENT**

NEW ADDRESS

Our New Factory and Offices having been completed, we are relinquishing our temporary premises at Wardour Street, W.I.

All orders and communications should now be sent to us at HUNTINGDON, where larger works with greatly improved layout will enable us to give you even better service.

Thank you!

**ACOUSTICAL
MANUFACTURING CO**

LIMITED
ERMINE ST., HUNTINGDON
Telephone: 361

**The 65 Watt
'PENCIL' BIT
SOLOON**

One of the range of Industrial type SOLOONS. Conforms to Home Office requirements. Pressure tested 600 volts to earth for 1 minute.

MADE FOR
USUAL
STANDARD
VOLTAGES.

NOTE—Production of the popular 'Handyman' 65-watt SOLOON has been discontinued.

Other models are available.

Write for Leaflets.



W. T. HENLEY'S TELEGRAPH WORKS CO. LTD.
Engineering Sales Dept., Milton Court,
WESTCOTT, DORKING, SURREY.

G. A. RYALL, "Arnehurst," Marsh Lane, Taplow, Bucks (late Ryalls Radio, London), offers radio components, post free.

T.C.C. Wet Can Upright 8 mfd. Electrolytics, 440v., 2/3 each, 24/- dozen; T.C.C. midget cardboards, 25 mid, 25v. plus 10 mid, 150v., 1/3 each; inverted metal block electrolytics, as used G.P.C. sets, 14x14x7x3x3x20x20 mfd., at 450-450-350-450-35-35v., two common leads, 4/9 per block, slightly soiled.

PLESSEY Tuning Coils in Oval Cans, chassis type, mostly aerial and H.F. transformers without reaction, two for 1/3; Ferranti screened coils, pairs of aerial and H.F. transformers, with reaction, 2/6 pair with coil connections.

VOLUME Controls.—Centrabab 1/2 meg. with long spindle with switch, 2/3 each; few only; U.S.A. make 60,000 ohm broad base, medium brass slotted spindle, less switch, 1/6 each; Sator midget 1 meg. and 400,000 ohm and 100,000, 1/3 each; British make broad base 1 meg. and 0.4, at 1/6 each, slightly soiled.

ROLA P.M. Speakers, less transformers, 8in. cones, perfect, slightly out centre, been damp, 5/9 each; ditto with damaged cones, two for 5/9; 10in. damaged cones, two for 5/9 or each 3/6; Celestion moving coil 8in. speakers with trans., been damp, 7,000 ohm field windings, 3/6 each, or 13/6 box of five; ditto 1,500, less trans., and 3,000 ohm, less trans., 6in. type, a few selected, any type, working order, at 5/9 each; Celestion moving coil speakers, new (oval type, handle 8 watts), 750 ohm fields, less trans., speech coils, 30 ohms, 5/9 each, or 10/6 pair; trans. for pair, 5/6.

ERIE Resistors, 1/2 watt type, actual values, as used in many well known sets, 140, 150, 200, 220, 270, 350, 470, 3,500, 6,900, 7,500, 18,000, 25,000, 27,000, 35,000, 150,000, 330,000, 330,000, 1 1/2 meg., 3/- dozen, new goods; Eric resistors, 2 watt type, 800, 1,000, 1,500, 7,500, 8,000, 8,200, 12,000, 12,500, 30,000, 40,000, 56,000, three for 1/6, new goods; Eric resistors, 3 watt (note, many sizes in 2w. and 3w. are offered with a view to being used in parallel), 150, 300, 330, 390, 400, 680, 700, 1,500, 2,200, 3,300, 4,700, 6,800, 7,000, 12,000, two for 1/6, new goods; T.C.C. 0.1 mid. tubular non-inductance condensers, 350v. wkg., 5/6 dozen, new goods.

PAXOLIN Strip, 2 1/2in. wide, as used for group boards, etc., three 12in. lengths for 1/6; group boards, with tags, 12 way, two for 1/3; or drilled, less tags, four for 1/3.

AMERICAN 2v. Battery Valves, sets three, American bases, 1A4 VM/HFP, 1B4 HFP, 2101 1/2 watt output pentode; 6/6 set three; suit Philco sets.

WELL-KNOWN Make 1 watt Resistances, sizes available, 250, 10,000, 20,000, 30,000, 1/2 meg., 1 meg., 2 meg., 2/6 dozen; and 1/2 watt assorted, 300, 400, 30,000, etc., 2/6 dozen, few only to clear; 3 watts, 25, 270, 300, 50,000, 60,000, 70,000, 80,000, three for 1/6, few only to clear.

G.E.C. "Tuneon" Tuning Indicators, as used in the "AVC Five" neon type, 1/3 each; slow motion (epicyclic) drives, fit 1/4in. shafts, long 1/4in. spindles, well made in brass, with ball bearings, ratio 8-1, 1/3 each.

CLIX Chassis Valve Holders, 5-pin shield pattern, and 7-pin lemon and circular, 2/3 dozen; American chassis V.H. British made, 6- and 7-pin, 4/- dozen.

KNOBS.—Small brown Ultra pattern, 1/3 dozen; large black mottled 2in., three 1/3; Cossor light brown "Volume" round, dark brown octangular, "Radiogram" with arrow, "Wave change," 2/3 dozen, all with brass inserts.

CLIX Input Strips, A. and B. P.U. loud speaker, etc., 2-, 3-, 4-, 5-way, 2/3 dozen; plugs, 1/3 dozen; plug and socket, 3-position, as used for mains input adjustment, three 1/3.

LARGE Goldtone H.F. Mains Chokes, heavy duty, two for 1/6, may be slightly soiled; Ferranti wire wound resistors, nickel end caps, 4,000, 6,000, 8,000, 35,000, 4 for 1/3.

T.M.C. 0.5 mfd. Tubulars, 400v. wkg., 3 for 1/3; Clayton type trimmers on Ceramic bases, 70 mm., 2/6 dozen; double trimmers on Paxolin, ex G.P.C., not joined, 2/6 dozen; single ditto, 1/6 dozen; ditto, not mounted, 1/2 dozen.

REX Type Switches, 4-bank 2-pole 4-way, 5 with shorting plates, 2/6 each; Rex type switch wafers, 3-way, 2-, 3-, 4-pole, 4 for 1/3.

VALVES.—Europa AC/L 4v. 1 amp., makes good detector or L.F. amplifier, 3/3 each; Europa AC/HP 5-pin base, 3/3 each (metallising of the AC/HP may be rather soiled but all O.K.); triodes, 2-volt, detector, power and superpower, 2/- each, few only.

WELL-KNOWN Make Mica Condensers, 0.0028 and 0.003, 1/3 dozen; silver mica Sator, 0.00015, 0.00045, 0.0005, 2/3 dozen; wave traps, ex K.B., iron core, 1/3; switches for band pass H.F. and dial lights, Wearite type, 1/3.

BATTERY Leads, 4-way with plugs, two for 1/6; well-known make 900 ohm 1/2 watt resistances, 1/3 dozen; 400 ohm ditto; cable, 4-way single strand in one cover, 4 yards 1/3; single connecting wire, white, 18 yards 1/3.

U.S.A. Make 1 watt Resistances, approx. sizes 12,000, 17,000, 60,000, 70,000, 80,000, 90,000, 1 1/2 meg., 24 for 1/6.

PORTABLE Amplifier Cases, ex Pathscope, about 14x20x12 deep, 4/9, slightly soiled; insulating tape, 1/3 lb.; resistances, wire wound on glass, 330 ohms, carry about 0.3 amp., 2 for 1/6, few only.

SPECIAL Note.—We now confine our business to a quiet situation. Our customers should note that when the present stocks are disposed of there is no likelihood of our being able to offer further surplus goods.—G. A. Ryall, "Arnehurst," Marsh Lane, Taplow, Bucks. [9703



It's the attention to detail that makes R.S.A. Equipment just that much better... just that much more reliable... just that much more efficient. But not that much more expensive

Whether your interest in purchasing Sound Equipment is private or industrial, you will find an investigation of the **R.S. AMPLIFIERS** range well placed and well repaid.

The items listed below are representative of our apparatus and full details will be sent on request. Let us know your special needs and we'll be happy to co-operate.

AMPLIFIERS

"M.M. Twin."—Double speaker equipment giving 12 watts output. Five valves AC/DC 190-260 volts. Complete with "mike," stand and cables.

"Universal Fifteen."—15 watts output. Two speakers, AC/DC 190-260 volts. High and Low impedance input. Complete with "mike," stand and cables.

"Porta Thirty."—30 watts output. Two speakers (this equipment can accommodate up to fifteen speakers!). AC 200-250 volts. Complete with "mike," C.P. stand and cables. The acme of perfection in portable amplification.

CHASSIS

Five types of chassis are available. 50 watt, 30 watt, 15 watt, 12 watt and a 12-watt Battery Unit.

ACCESSORIES

Crystal Microphones and Stands. Speaker Units (Exponential Horns), 11 watts and 13 watts capacity.



Phone: Wat'on-on-Thames 1019

ELECTRADIX

STANDARD METERS FOR TEST ROOM

- NEW Weston Model 1 Ammeter, DC accuracy 1/2 of 1% M.C. 7 1/2 in. scale. Mirror scale. Eight ranges: 0-3 m/a., 15 m/a., 75 m/a., 500 m/a., and 15 amps., 5 amps., 15 amps., 150 amps. New **£25**
- NEW Weston Model 2 Voltmeter, as above. Three ranges: 0-5 volts, 0-150 volts, 0-750 volts. Mirror scale. Both these meters have portable cases. New **£22**
- NEW Weston Model 440 Centre Zero Microammeter, accuracy 1% of scale. Centre zero, 10-0-20 m/a., and 100-0-200 m/a. Mirror scale. New **£15**
- NEW Weston Model 370 A.C. Dynamometer Ammeter, accuracy 1/2 of 1%. Two ranges: 0-25 amps. and 0-5 amps. No transformer for high ranges. New **£36**
- NEW Weston Panel Model 301 Flush 2 1/2 in. A.C. Milliammeter, 0-1 m/a. Rectifier type M.C. New **£4/10**
- NEW 500 volt Megger, see illus. on p. 239, Sept. issue

METERS. Commercial Leadix Meters. Mov. coil, 4-1 m/a., flush 2 1/2 in. dia., 55 v. D.I.C. 0-5 m/a., 45 v. Moving Iron A.C.D.C. surface panel, 1 amp., 3 amps., 5 amps or 10 amps. Limited number, 10/- each.



WORKS SWITCHBOARD. 18ft. x 8ft., with 12 Auto. Circuit Breakers, 300 amps. A.C. Two 1,000 amp. Oil Switches, 8-way Battery and Dynamo panels and meters, etc. Seen now at our Battersea Works. **Portable Test Panel**, with four flush 6 1/2 in. two range meters, m/a. to 12 amps. and 1/2 volt to 500 volts, A.C. and D.C. **£12**.


WORKS MOTOR GEN. 55 v. D.C. 6 h.p. Crypto S.P. 230 v. Dynamo 100/100 v. 20 amps. D.C. **£42**. Alternators, B.T.H. 2 kw. 300 cycles 100 volts, **£14**. Newton Motor-Alternator 5 kw. 500 cycles 200 volts 25 amps., on vertical D.C. 220 v. motor, **£25**. **Micro Motors**, 8/6. 110-volt 1 amp. D.C. motors, 15/6. 200 volts 1/2 amp., 21/- 6 v. and 600 volt Dynamos, 25/-.

MORSE KEYS. Type B.I., a strong key, 5/- Bakelite base type M, 8/6. A first-class key, type P.P., 6/6. Type P.P., 6/6. Type IV, 12/6. Fuller Folding Service Key, few only, 17/6.

BUZZERS. Bakelite cased practice Buzzers, 3/6. Neat brass cased Buzzer, 4/6. Heavy type, Bakelite cased, 5/6. D.3 Buzzers, multiple windings, no contacts, 5/6.

Cambridge-Townsend. High Note model, "T" diaphragm blade, platinum contacts, smallest Buzzer made, 10/-.

Phones and Field Telephone Cable.



PLEASE NOTE NEW ADDRESS.

Our new offices adjoin our Works at Battersea, 19, Broughton Street, Queenstown Road, S.W.8, Queens Road Sta. or No. 137 bus route. 2d. fare from Sloane Square.

Stamped envelope for all replies, please.

ELECTRADIX RADIOS

19, BROUGHTON STREET,
Queenstown Road, Battersea, S.W.8

Phone: MACaulay 2150



F

FOR THE RADIO SERVICE MAN, DEALER AND OWNER

The man who enrolls for an I. C. S. Radio Course learns radio thoroughly, completely, practically. When he earns his diploma, he will KNOW radio. We are not content merely to teach the principles of radio, we want to show our students how to apply that training in practical, every-day, radio service work. We train them to be successful!

INTERNATIONAL CORRESPONDENCE SCHOOLS

Dept. 38, International Buildings, Kingsway, London, W.C.2.
Please explain fully about your instruction in the subject marked X.
Complete Radio Engineering Radio Service Engineers
Elementary Radio **Television**
If you wish to pass a Radio examination, indicate it below.
Inst. of Wireless Technology
P.M.G. Certificate for Wireless Operators
Provisional Certificate in Radio Telephony and Telegraphy for Aircraft
City and Guilds Telecommunications

Name..... Age.....
Address

(Use penny stamp on unsealed envelope)

SOUTHERN RADIO'S Wireless Bargains:—

- 5/-** Parcel.—Assorted components, including valve holders, volume controls, wire, resistances, condensers, circuits, etc.; 5/-.
 - 15/-**—Service kit of components, including resistances, tubular and electrolytic condensers, volume controls, chokes, etc., etc., contained in wooden carrying case; 15/-.
 - 25/-**—Small trader's parcel of components, 100 saleable items; 25/-.
 - 3/-**—Wooden Tool or instrument case, 9in. x 7in. x 7in., ex Government stock; 3/-.
 - ORMOND** Loud Speaker Units, balanced armature type, 6/6; smaller bakelite type, 3/6; unshrouded type, 2/6; wireless crystals, 6d. each, 5/- per dozen tins; Ace P.O. microphones, complete ready for use with any set, 6/6 each; Westectors W2, 2/6; mica condensers, assorted sizes, 3/- dozen; assorted terminals, plugs and lag ends, 6/9 gross; Telsen radio magazines, complete with 4 blue prints, 6d. post free; Mainbridge condensers, 1 mfd., 1/2, 2 mfd., 1/9, 4 mfd., 2/9 each; valve holders, assorted, 9/- 7-, 5-4-pin, 3/- dozen; permanent magnet speaker, W.B., 10in., with transformer, 25/-; thousands of bargains for callers; all goods guaranteed; please add postage to amount of order, approximate postage 7d. on 5/-, to 1/1 on 25/-.
- SOUTHERN RADIO SUPPLY Co.**, 46, Lisle St., London, W.O.2. Gerrard 6653. 1913
- COLVERN** Tuning Unit, G1, 2, 3 coils (Band Pass I.L.P.), good condition.—8, Elm Rd., Evesham.

Wanted

HIVAC Midget Valves, Bulgin L.F.33 transformers; please write first.—L. Thomas, 21, Boverton St., Cardiff. 19639

REPAIRS AND SERVICE

L.T.P. Repair All Mains Transformers and Chokes. L Prompt delivery.
LONDON TRANSFORMER PRODUCTS, Ltd., Willesden, N.W.10. Wil. 6486 (3 lines). 19552

M.A.I.N.S. output transformers, chokes, etc., rewound.
M—Davies, 30, Morley Av., Manchester, 14. 19700

A MERICAN Receiver Repairs.—The American experts.—Write Bennett's, 4, Humberstone Drive, Leicester. 19712

"SERVICE with a Smile."—Repairers of all types of British and American receivers; coil rewinds; American valves, spares, line cords.—F.R.I., Ltd., 22, Howland St., W.I. Museum 5675.

M.A.I.N.S. Transformer Service, repairs, rewinds, or construction to specification of any type, competitive prices and prompt service.—Sturdy Electric Co., Ltd., Dipton, Newcastle-on-Tyne. 19651

METROPOLITAN RADIO SERVICE Co. Guarantee Repairs to American and British Receivers. Linecord resistances, condensers, and vol. controls, Trade supplied.—1,021, Finchley Rd., N.W.11. Spe. 3000.

BUSINESSES FOR SALE OR WANTED

"THE Wireless and Electrical Trader" is an essential part of the equipment of every Wireless Trader, its pages reflect the very latest turn of trade events, and it is read by all the leading dealers and manufacturers, for particulars of businesses offered or wanted. By subscription, to the trade only, 17/6 per annum, post free.—Send your trade card for specimen copy to Dorset House, Stamford St., London, S.E.1.

TECHNICAL TRAINING

GREAT Possibilities Exist for Technically Qualified Engineers, key men in wartime and afterwards. Through the home-study courses of The T.I.G.B. take a recognised engineering qualification such as A.M.I.Mech.E., A.M.I.E.E., A.M.I.R.E., A.F.R.A.E.S., A.M.I.Chem.E., C. and G., etc., in which examinations the T.I.G.B. students have gained 25 **FIRST PLACES** and Hundreds of Passes. Write to-day for "The Engineer's Guide to Success"—Free—containing the world's widest choice of engineering courses covering all branches, including Aeronautical, Mechanical, Electrical, Wireless, Chemical, etc.

THE TECHNOLOGICAL INSTITUTE OF GREAT BRITAIN, 82, Temple Bar House, London, E.C.4. 19335

TUITION

RADIOLOCATION.

NATIONAL COLLEGE OF RADIO AND ELECTRICAL TECHNOLOGY, Beaumont Park, Huddersfield.—Correspondence Courses will commence immediately to train pupils of BOTH SEXES for important WARTIME OCCUPATIONS in the RADIO and TELEVISION INDUSTRIES, and also for Volunteers who wish to take up WIRELESS DUTIES in H.M. FORCES or MERCHANT NAVY. Applications are also invited from prospective pupils who wish to take up WIRELESS TELEGRAPHY as a permanent career to attend as **DAY STUDENTS**. Apply, enclosing 25d. stamp, to Secretary (W.W.). 19688

RADIO Training.—P.M.G. exams and I.E.E. Diploma, prospectus free.—Technical College, Hull. 10611

PRACTICAL Radio Postal Courses, coaching for P.I.P.R.E., R.A.P., A.I.D. exams; booklet free.—Secretary, I.P.R.E.E., Bush House, Walton Avenue, Henley-on-Thames. 19547

RADIO Engineering, Television and Wireless Telegraphy; comprehensive postal courses of instruction.—Apply British School of Telegraphy, Ltd., 179, Clapham Rd., London, S.W.9 (Est'd. 1906). Also instruction at school in wireless for H.M. Merchant Navy and R.A.F. 19249

SITUATIONS VACANT

CAPABLE Service Engineer, bench work only, in thoroughly equipped depot.—Particulars and copies of references to E. Upton & Sons, Ltd. Radio Service Depot, 32, Southfield Rd., Middlesbrough, Yorks. 19695

RADIO BOOKS

THE SUPERHETERODYNE RECEIVER

By Alfred T. Witts. A reliable and complete guide to the superheterodyne receiver, incorporating all recent developments. Recognised everywhere as the standard work on the subject. **PRACTICAL WIRELESS** says: "Gives all the information necessary for a complete understanding of the superheterodyne receiver." 5th Edition. 5s. net.

RADIO RECEIVER SERVICING AND MAINTENANCE

By E. J. G. Lewis. A practical manual specially written to give the radio dealer and service man up-to-date and reliable information on the technical details of their work. The index is combined with a handy fault-finding summary. **WIRELESS WORLD** says: "The book is so practical, so replete with facts, and so well arranged, that the reader will gain the necessary knowledge to work in a logical manner." 8s. 6d. net.

CATHODE-RAY OSCILLOGRAPHS

By J. H. Reyner. A simple guide to the practical application of cathode-ray tubes to the examination of oscillations or wave-forms and to numerous other purposes. A most valuable book for all who wish to gain a thorough knowledge of the subject. **ELECTRICAL TIMES** says: "Anyone desiring a clear understanding of the cathode-ray oscillograph . . . cannot do better than purchase this moderately-priced book." 8s. 6d. net.

Send for free 4-page leaflet of Pitman Books on Radio and Television.

PITMAN

39 Parker Street, London, W.C.2.

"COSMOCORD" CRYSTAL PICK-UP

LICENSED BY BRUSH CRYSTAL CO., LTD., under Brit. Pat. Nos. 366,252 and 454,595



RETAIL PRICE **25/-** PLUS TAX

SOLE SELLING AGENTS: SALE, TILNEY & Co., Ltd., 3, LLOYD'S AVENUE, LONDON, E.C.3. Phone: ROYal 4511.

WARD WE MANUFACTURE :

ROTARY CONVERTERS DC/AC for operating P.A. amplifiers, Radio Receivers, etc.
DC/DC ROTARY TRANSFORMERS, SMALL ALTERNATORS, SMALL DC MOTORS, H.T. GENERATORS, MAINS TRANSFORMERS up to 10 k.v.a. **PETROL ELECTRIC** generator sets up to 50 k.v.a. **BATTERY CHARGERS** for private and industrial use.

We can also handle general small engineering work.

Full details of any of the above upon request
CHAS. F. WARD
Note new address: Office and Works:—
37, White Post Lane, Hackney Wick, E.9
Tel.: Amherst 1393.

Sans peur et Sans reproche

ROGET'S THESAURUS devotes many columns to the simple word, "best." In the world of Transformers, however, the name Gardner is all that is necessary in the way of amplification. If you are using, or contemplating using, small Power Transformers up to 4 kva. where nothing but the best will serve, then we believe it will be well worth your while to have a word with us.


★ Although at the present time it is not possible for us to give normal peacetime service, we are still in a position to give reasonable delivery dates for dealers' priority orders.



GARDNERS RADIO LIMITED
Somerford • Christchurch • Hants

RELAYS

for A.C.
and D.C.



SILENT & RELIABLE
2 VA coil consumption, from 2-600 volts, tested to 2,000 volts. Unmounted and in cast iron casing. Also Time Lag Relays. High Sensitive Relays, complete control plants.

idget Relay type ML (for D.C. only) Apply for leaflet SPN/WW

LONDEX LTD.

Electrical Remote Control Engineers and Manufacturers

Anerley Works, 207, Anerley Road, London S.E.20
Tele.: SYDENHAM 0288/0289.

TRIX

RELIABLE AMPLIFICATION
The TRIX ELECTRICAL COMPANY LTD.
#5, Boisover St., London, W.1. Euston 5471

SOUND
EQUIPMENT

WIRELESS Technical Instructors Required in Army Units.

EMOLUMENTS.—Pay 8/9 per day (7 days a week); clothing, rations and accommodation, or if this cannot be provided allowances at authorised rates; if married and otherwise eligible, family allowance payable in respect of wife and children, subject to allotment from pay.

CANDIDATES Should Preferably be under 35 and over 24, and

(A) Hold one of the following qualifications:—

Graduateship of the Institution of Electrical Engineers.

Final (Grade III) Certificate of City and Guilds of London Institute Examination in Radio Communication.

Higher National Certificate in Electrical Engineering.

Certificate of City and Guilds of London Institute in Radio service work.

Or

(B) Be able to pass an examination on the following syllabus:—

Simple algebra, including quadratic equations; simple trigonometrical ratios and identities; vectors.

Properties of electrical currents; heating of conductors; magnetic fields; unit of current; Ohm's Law; resistance in series and parallel; potentiometers.

Magnetic effect of current fields due to parallel wires; field due to a solenoid; electro-magnets Meters.

Induction; effect of rotating a coil in a magnetic field.

Mutual and self induction and inductance; effect of inductance on growth and decay of current.

Capacity; charging storage and discharge of condensers; through resistance and inductance.

Alternating currents; vector diagrams; effect of resistance variation; effects of L and C in A.C. circuit; phase difference of currents; resonance in a series circuit; parallel circuit of L and C; Q factor.

Elementary knowledge of valves; simple theory of amplifiers, oscillators and detectors; general principles of radio practice.

SUITABLE Candidates will be interviewed at Local Centres, and, if successful, will be enlisted and appointed Acting Sergeant Tradesman.

For those who are on the Schedule of Reserved Occupations, special arrangements will be made to enable them to be enlisted. In the event of any applicant found to be reserved under Schedule of Reserved Occupations special application will be made for relaxation of the Schedule. No guarantee can be given that this application will be successful.

APPLICATION Forms may be Obtained by Postcard from the Under-Secretary of State, The War Office (A.G.6c), Whitehall, S.W.1.

RADIO Service Engineer, permanent position to experienced man.—Metropolitan Radio Service, 1,021, Finchley Rd., N.W.11.

ENGINEER Required for Radio Service, conversant with all makes; write age, experience, salary required.—Audiron, Ltd., 7, Grange Rd., Willesden Green, N.W.10.

YOUTH Required for Radio Service, knowledge of radio trade not essential; write age, particulars and salary required.—Audiron, Ltd., 7, Grange Rd., Willesden Green, N.W.10.

SERVICE Engineer for valve deaf aids. Reserved occupation. Permanency for man with ability and good appearance, able to deal directly with clients. Write age, experience, salary required.—Amplivox, Ltd., 2, Bentinck St., London, W.1.

FIRST-CLASS Radio Service Engineer Required for South-West town. Excellent prospects to right man.—Apply, stating qualifications and salary required, to Ogden, Hibberd Bull & Langton, Park House Chambers, Princess Square, Plymouth.

BRITISH OVERSEAS AIRWAYS CORPORATION Has Immediate Vacancies for Radio Officers; candidates must be British subjects by birth, medically fit and in possession of a P.M.C.'s Air Operator's W/T Certificate; preference will be given to candidates with more than three years' previous professional radio operating experience in the air or at sea. Successful candidates will be required for duty overseas in the near future.—Letters of application, stating age, experience, whether married or single, licence number and military commitments (if any) and date available for interview, should be addressed to Box 250, L.P.E., 110, St. Martin's Lane, W.C.2. Please mark envelope P.E.O.

SITUATIONS WANTED RADIO Engineer, age 34, invalided from Forces, knowledge service and design, desires permanent post; good personality.—Box 2596, c/o Wireless World.

BOOKS, INSTRUCTIONS, ETC. WANTED for Cash, W.W., Nov., Dec., 1940, April, 1941.—P.O. Dormer, Officers Mess, R.A.F. Cranwell.

WANTED, Copy of "Electronics," November, 1940, now out of print, to replace one lost in post.—Box 2591, c/o The Wireless World.

WEBB'S Radio Map of the World Locates Any Station. Hearl. Size 40x30in., 4/6 post 6d. On linen, 10/6, post 6d. Webb's Radio Globe 12in. model. Radio prefixes, zones, etc. 27/6.—Webb's Radio, 14, Soho St., London, W.1. Phone: Gerrard 2089.

EVERY Radio Dealer Who is Not a Regular Reader of "The Wireless and Electrical Trader" should send his trade card at once for a specimen copy and full details of the "Trader" Services. "The Wireless and Electrical Trader" has the widest influence, and is read by all the leading manufacturers and traders. Trade only, 17/6 per annum, post free. Published at Dorset House, Stamford St., London, S.E.1.

W/T OPERATORS

are urgently required in practically every branch of the Services—

**ARMY—NAVY—AIR FORCE—AND
-IN THE MERCANTILE MARINE.**

Many who would like to become skilled W/T Operators are located too far away from the few schools which they might attend, whilst others cannot spare the time used up in travelling to and from classes.

THE CANDLER SYSTEM OF CODE TRAINING

is carried out in your own home

The excellence of Candler Code Courses has accounted for the success of many thousands of present-day operators. Numerous readers of this journal are Candler trained.

Read these extracts from a letter sent in by a Candler student on August 16th, 1941:—

"I had no knowledge of Morse before taking the Candler Course. . . . I have a perfect 100% receiving speed of 27 w.p.m. code, 29.4 plain language, figure speeds 19 groups per min. (5 figs. per group) and 24 groups per min. short numerals. . . . I have a knowledge of 67 different Q signals and nearly all the abbreviated signals listed in your course. Rugby Press comes in like reading a book. . . . I have secured a Government post as a Telegraphist, thanks to the Candler System."

Ref. No. 3171. R. G. S.

The original of this and other similar letters from Candler students may be inspected at the London Office.

COURSES FOR BEGINNERS & OPERATORS

The JUNIOR Scientific Code Course is a complete course for beginners. It teaches all the necessary code fundamentals scientifically.

The ADVANCED and High-Speed Telegraphing Course is for operators who want to increase their w.p.m. speed and improve their technique.

The TELEGRAPH Touch-Typewriting Course is a special course for telegraphists who want to become expert in the use of the typewriter for recording messages.

Courses supplied on Cash or Monthly Payment terms.

If you desire to become a skilled W/T Operator, send for a copy of the Candler "Book of Facts."

COUPON

Please send me a Free Copy of Candler "Book of Facts."

NAME

ADDRESS

Post Coupon in 1d. unsealed envelope to London Manager

CANDLER SYSTEM CO.

(Room 55w), 121, Kingsway, London, W.C.2.

Candler System Co., Denver, Colorado, U.S.A.

CASES

AND PARTS

FOR

Radio and Radio Instruments in wood or metals end in any quantity.

Anything in wood from a packing case to precision work.

Cases, racks and panels, etc., in metal.

Please send full details or drawings with enquiries.

Metal parts can only be manufactured for essential work or agains; Contract No.

LOCKWOOD & CO.

LOWLANDS ROAD, HARROW, MIDD.

PHONE: BYRON 3704

CLASSIFIED ADVERTISEMENTS

intended for the NOVEMBER ISSUE can be accepted up to Thursday, October 9th.

SIXTH EDITION

Revised and Enlarged

WIRELESS SERVICING MANUAL

By W. T. COCKING, A.M.I.E.E.
(of "The Wireless World")

A complete book of reference. The most reliable practical guide for amateur and professional.

Advantage has been taken of this new edition to make a thorough revision of the contents, and to add new material where required, including an additional chapter on Automatic Frequency Control.

Ganging, Automatic Volume Control, The Use of Cathode-ray Test Gear, Instability, Distortion, Mains Hum, Whistles, Local Interference, and Aerials are all separately treated.

In the new chapter on automatic frequency control, various practical methods are described and discussed. The valve base connection tables, which cover British and Continental types, have been extended and revised, while numerous minor revisions and additions have been made elsewhere.

BOUND IN CLOTH BOARDS
SIZE 7 1/2 ins. x 5 ins.
314 pages

6/- net. By post 6/6

Issued in conjunction with "THE WIRELESS WORLD" and published by the Proprietors:—
ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1

The Wireless World

Ready During October

DIARY and REFERENCE BOOK for 1942

Size 3 1/2 by 4 1/2 inches, 192 pages. Bound leather cloth, back loop with pencil.

PRICE
2/3 net

By post, including Purchase Tax, 2/10 1/2

From bookstalls and stationers or direct from the Publishers

In addition to the usual daily spaces—one week at an opening—there is a list of the most important Broadcasting Stations of the World; base connections of British and American valves; circuit diagrams of receivers and accessory units. For the wireless telegraph student there are the Morse and "Q" codes, and international call sign allocations. Tables showing the allocation of wavelengths to the various wireless services and also standard times throughout the world have been added.

ILIFFE & SONS LTD.

Dorset House, Stamford Street, London, S.E.1

INDEX TO ADVERTISEMENTS


PAGE	PAGE	PAGE
Acoustical Manf. Co., Ltd. 17	Galpins Electrical Stores 16	R.S. Amplifiers, Ltd. 17
Air Ministry 8	Gramplan Reproducers, Ltd. 2	Ryall, G. A. Classified Ad. p. 17
Armstrong Manf. Co. 15	Goodmans Industries, Ltd. 13	Sale, Tilney & Co., Ltd. 18
Automatic Coil Winder & Electrical Equipment Co., Ltd. 1	Henley's, W. T., Telegraph Co., Ltd. 17	Savage, W. Bryan, Ltd. 15
Baker's Selhurst Radio Classified Ad. p. 15	Holsun Batteries, Ltd. 17	Shuttle, E., & Co., Ltd. 13
Belling & Lee, Ltd. 6	International Correspondence Schools 18	Simmonds Aerocessories, Ltd. 12
British Institute of Engineering Technology Back Cover	Lockwood & Co. 19	Simmonds Development Corporation, Ltd. 20
British Insulated Cables, Ltd. Cover iii	Londex, Ltd. 19	Southern Radio Supply Co. Classified Ad. p. 18
British Rola, Ltd. Cover iii	London Central Radio Stores, 6, also Classified Ad., p. 16	Steatite & Porcelain Products, Ltd. Cover ii
Bulgin, A. F., & Co., Ltd. Edit. 273	London Radio Supply Co. 15	Trix Electrical Co., Ltd. 19
Bullers, Ltd. 3	Masteradio, Ltd. 11	United Insulator Co., Ltd. 4
Candler System Co. 19	Masters, C. E. 16	Voigt Patents, Ltd. 8
Celestion, Ltd. 8	M.R. Supplies 2	Vortexion, Ltd. Edit. 271
Electradix Radios 18	Multicore Solders, Ltd. Cover iii	War Office Classified Ad. p. 19
Exide 5	Partridge, N. 15	Ward, Charles F. 18
Fluxite, Ltd. Edit. 269	Pitman's 18	Webb's Radio 9
Frazar & Co., Ltd. 10	Premier Radio Co. 14	Westinghouse Brake & Signal Co. Ltd. 4
Furzehill Laboratories 15	Raymart 7	Wharfedale Wireless Works Cover iii
Gardners Radio, Ltd. 19		Whiteley Electrical Radio Co., Ltd. 13

THE SIMMONDS GROUP

INVENTORS

We continually seek new inventions and products in all branches of industry for development and production by the manufacturing Companies of the Simmonds Group throughout the world.

SIMMONDS DEVELOPMENT CORPORATION LTD.
BUSH HOUSE, W.G.2.



WHY YOU SHOULD USE ONLY
ERSIN MULTICORE
THE SOLDER WIRE WITH 3 CORES OF NON-CORROSIVE ERSIN FLUX



- Avoids Dry Joints
- Increases Electrical Efficiency of Joints
- Speedily makes Sound Joints on Dirty or Oxidised Surfaces
- Always Correct Proportions of Flux and Solder
- No Additional Flux Required
- Low Melting Point (190° C. for 80/40 alloy)
- Approved by Air Ministry and G.P.O.
- All-British and acknowledged by the Leading Manufacturers to be the finest Cored Solder in the world.

FREE

Two informative publications on soldering have been issued by Multicore Solders Ltd. Executives are invited to send for copies and a free sample of Multicore Solder.

MULTICORE SOLDERS LTD.,
 BUSH HOUSE,
 LONDON, W. C. 2.
 Tel: TEMple Bar 5883/4

B.I.

RADIO MATERIALS

We have had a long experience in the manufacture of all kinds of Cables and Wires, Static Condensers, Insulators and Iron Work, Telephone Cords and Copper Earthing Rods, for Radio use.



Write for Leaflet M.108.
 U.K. Regd. Trade Mark.

BRITISH INSULATED CABLES LTD.
 CABLE MAKERS AND ELECTRICAL ENGINEERS
 Head Office:
PRESCOT, LANCS. Tel. No. PRESCOT 6571

ROLA

LOUD SPEAKERS
 THE WORLD'S FINEST REPRODUCERS


TRANSFORMER LAMINATIONS
 Core Width $\frac{3}{8}$ " to $1\frac{1}{2}$ " (E's & I's)

EIGHT STOCK SIZES
 A Comprehensive Bulletin together with details of Associated Covers and Clamps with design data will be sent to manufacturers on request.

BRITISH ROLA LIMITED
 MINERVA RD., PARK ROYAL, N.W.10. WILlesden 4823

WHARFEDALE

GOLDEN CHASSIS




As supplied to the B.B.C.
 Supplies of this first-class Loud Speaker are still available.
 Delivery 2/3 weeks.

PRICES:

	Less Trans.	With Trans.
Chassis only - - -	60/-	75/-
Cabinet Model - - -	97/6	112/6

RESPONSE CURVE

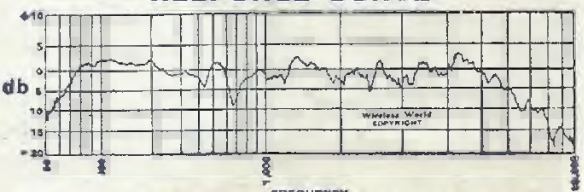

WHARFEDALE WIRELESS WORKS
 SOLE PROPRIETOR: D. E. BRIGGS,
 HUTCHINSON LANE, BRIGHOUSE, YORKS.
 PHONE: BRIGHOUSE 50. 'GRAMS: "WHARFDEL."

FREE!

THIS IMPORTANT GUIDE TO SUCCESSFUL ENGINEERING CAREERS



After months of intensive effort and research we are pleased to announce that the new edition of our handbook, "ENGINEERING OPPORTUNITIES," is now out of the publishers' hands and ready for *free distribution*. Containing 208 pages of practical guidance, this book is, beyond argument, the finest and most complete handbook on Successful Engineering Careers ever compiled. It is a book that should be on the bookshelf of every person interested in engineering whatever his age, position or experience.

The Handbook contains, among other intensely interesting matter, details of B.Sc., A.M.I.C.E., A.M.I.Mech.E., A.M.I.E.E., A.M.I.A.E., A.M.I.R.E., A.M.I.P.E., CIVIL SERVICE, and other important Engineering Examinations; outlines courses in all branches of CIVIL, MECHANICAL, ELECTRICAL, AUTOMOBILE, RADIO, TELEVISION, AERONAUTICAL and PRODUCTION ENGINEERING, DRAUGHTSMANSHIP, TRACING, BUILDING, GOVERNMENT EMPLOYMENT, etc., and explains the unique advantages of our Employment Department.

WE DEFINITELY GUARANTEE "NO PASS—NO FEE"

R.A.F.

PILOTS

OBSERVERS

ETC.

Special rapid Home-study courses in the essential branches of Mathematics. For full details of this scheme apply or write

B.I.E.T. (Dept. M 387)
17, Stratford Place,
LONDON, W.1.

If you are earning less than £10 per week you cannot afford to miss reading "ENGINEERING OPPORTUNITIES." In your own interests, we advise you to **write** (or forward the coupon) for your copy of this enlightening guide to well-paid posts — **NOW**.

There is no cost or obligation of any kind.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY

Principal: Professor A. M. Low
387, SHAKESPEARE HOUSE,
17, 18 & 19, STRATFORD PLACE, LONDON, W.1

-----TEAR OFF HERE-----

FREE COUPON

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY,
387, Shakespeare House, 17-19, Stratford Place, W.1

Please forward **Free of cost or obligation of any kind**, your 208-page Handbook "ENGINEERING OPPORTUNITIES."

NAME

ADDRESS