

# wireless world

OCTOBER 1981 70p

**FREE  
REPRINT**  
Arthur C. Clarke's  
1945 article on  
satellite broadcasting  
*(U.K. Edition only)*

**Interfacing  
microprocessors**

**Digital tape  
recorder**

**Distinguishing  
'amplifier sound'**

# PROFESSIONAL TOOLCASES for Service Engineers

**£43.70**  
inc. VAT

**£39.90**  
inc. VAT

Size TL100 19" x 14" x 6"



Size TL99 17" x 12" x 6"

The TL99 and TL100 are designed for the Professional Electronics, TV or Instrument Technician who needs to carry a large number of specialist tools. Constructed from hard wearing ABS with strong aluminium frames, twin handles and toggle locks. They offer a moulded tray in the base, a comprehensive 2 sided tool pallet that's reversible with space for up to 40 tools. — The TL100 will take quite a few more. There's space for documents and a heat sink for a hot soldering iron to prevent any damage being caused.

TLW4 Toolwallet measures 11" x 14" x 2½" when closed. Made from reinforced PVC with a heavy duty industrial zip. The TLW4 Toolwallet is a compact alternative when only tools are needed to be carried.

**£13.75**  
inc. VAT



TLW4

**Teloman Products Ltd**  
Ermine House, Post St, Godmanchester, Cambs. PE 18 8BA (0480) 65534

*Mail Order*

Please send

Enclosed my cheque **£** .  
(P&P £2.60 extra)

Name \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_



Tools NOT included. British made.  
Money back guarantee. Allow 7-21 days for delivery.

# wireless world

OCTOBER 1981 70p

**FREE REPRINT**  
Arthur C. Clarke's  
1945 article on  
satellite broadcasting  
(U.K. Edition only)

WIRELESS WORLD OCTOBER 1981 VOL 87 NO 1549

Interfacing  
microprocessors

Digital tape  
recorder

Distinguishing  
'amplifier sound'


Philips motor technology  
turns great ideas  
into reality...



...Ask IMPEX

Because they're part of Philips with a range of small electric motors and technology second to none, and because they're part of Philips they can bring all the weight and know-how of Philips R&D to your project, whether your project is on-going or merely a glimmer in the eye of your Senior Design Engineer.

Contact Impex right away and find out how they can turn your dreams into reality. Being simply years ahead, Philips can bring you today the answers to tomorrow's problems, and that's worth knowing.

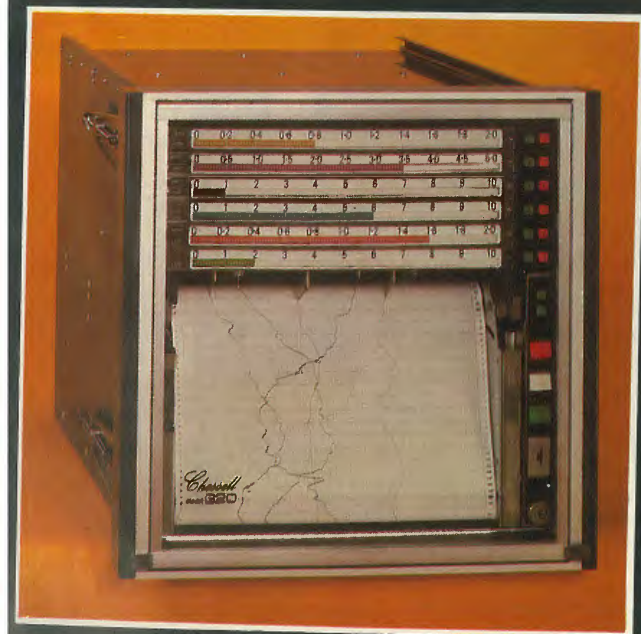

This Chessel multi-pen chart recorder uses six low-inertia DC motors for pen drive and a stepper as paper drive.

**impex** IMPEX ELECTRICAL  
Market Road, Richmond, Surrey  
Telephone: 01-876 1047/8 Ext 8202

WW-001 FOR FURTHER DETAILS



Front cover shows integrated-circuit probing equipment by Wentworth Laboratories. Photograph by Paul Brierley.

IN OUR NEXT ISSUE

**High-resolution satellite images.** The design of a receiving station for use with a computer to display weather pictures from spacecraft.

**C.b. frequency synthesizers.** Two kinds of synthesizer suitable for 27MHz are described, with a practical mixer synthesizer circuit to cover 40 channels.

**Cartridge alignment gauge.** Following on from this month's article, R. J. Gilson presents a simple device which makes alignment of pickup cartridges easier.

Current issue 70p, back issues (if available) £1.00, at Retail and Trade Counter, Units 1 & 2, Bankside Industrial Centre, Hop-ton Street, London SE1. Available on microfilm; please contact editor.

By post, currently issue 96p, back issues (if available) £1.50, order and payments to EEP General Sales Dept., Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

**Editorial & Advertising offices:** Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

**Telephones:** Editorial 01-661 3500. Advertising 01-661.3129.

**Telegrams/Telex:** 892084 BISPRS G.

**Subscription rates:** 1 year £12.00 UK and £15.00 outside UK.

**Student rates:** 1 year £8.00 UK and £10 outside UK.

**Distribution:** Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. Telephone 01-661 3500.

**Subscriptions:** Oakfield House, Perrymount Road, Haywards Heath, Sussex RH16 3DH. Telephone 0444 59188. Please notify a change of address.

**USA mailing agents:** Expeditors of the Printed Word Ltd, 527 Madison Avenue, Suite 1217, New York, NY 10022. 2nd-class postage paid at New York.

© IPC Business Press Ltd, 1981 ISSN 0043 6062

# wireless world



ELECTRONICS / TELEVISION / RADIO / AUDIO

OCTOBER 1981 Vol 87 No 1549

33 Invention – the orphan		
34 Microprocessor interfacing by J. D. Ferguson		
Amateur satellite	40 News of the month Commercial teletext	Microwaves and health
43 Integrated-circuit design by J. L. Linsley Hood		
46 World of amateur radio		
Linear power amplifier	47 Circuit ideas Gray-to-binary converter	Ten-beam converter
49 Quantifying amplifier sound by Yoshimutsu Hirata		
53 Letters to the editor 'Truth-table' logic symbols Filter transient response James Clerk Maxwell		
56 Multichannel digital tape recorder by A. J. Ewins		
59 The cartridge alignment problem by R. J. Gilson		
62 Tracking mains filter by K. Radhakrishna Rao and R. S. Moni		
67 Long-distance television reception by Keith Hamer and Garry Smith		
71 Sound for the Royal Wedding by John Flewitt		
74 Digital storage and analysis of speech – 3 by Ian H. Witten		
79 A.m. receivers without interference by Lewis Illingworth		
84 New products		
86 Sidebands by Mixer		

## DEVELOPMENT

### EPROM-PROGRAMMER ROMULATOR

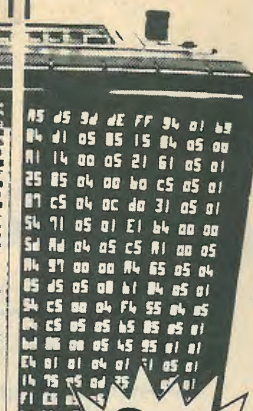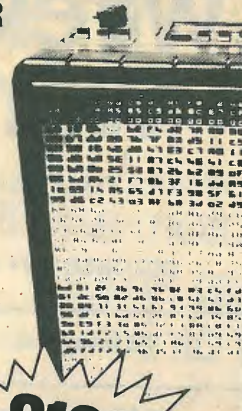

2716  
2732  
2532  
etc.

\*£169  
& VAT



- 1 MONITOR or TV output (625 line UHF). Data contents of memory visible — A WINDOW IN THE CHIP.
- 2 28-KEY, 2-LEVEL KEYPAD with HEX ENTRY and EDITING CAPABILITY. (BYTES and BLOCKS of code can be changed, inserted, deleted, shifted around etc.).
- 3 INPUT and OUTPUT: SERIAL (RS232) and PARALLEL (Centronics) routines provide ready interface with computer or printer.
- 4 EMULATION of PROGRAM MEMORY in-circuit is performed by plugging SOFTY into the ROM SOCKET. A lead with a 24 pin DIL PLUG is supplied.
- 5 CASSETTE INTERFACE.
- 6 EPROM-PROGRAMMER: an EPROM may be copied or reprogrammed at the press of a key.
- 7 PERSONALITY SWITCH selects 2716, 2532, 2732.

**SOFTY is used as an EPROM-PROGRAMMER, a production ROM CHECKER and for the DEVELOPMENT and PRODUCTION of PRODUCTS which contain MICRO-PROCESSORS and use EPROM for program storage.**

\*Price is for a BUILT and TESTED SOFTY (No kits) including POWER SUPPLY, TV LEAD, ROMULATOR LEAD, 90 DAY WARRANTY and 14 day money-back guarantee.  
£169.00 + £25.35 (VAT 15%) = £194.35.

**DATAMAN DESIGNS,**  
Lombard House, Dorchester, Dorset DT1 1RX  
Dorchester (0305) 68066 (UK Sales)  
Maiden Newton (0300) 20700 (Export)


WW - 055 FOR FURTHER DETAILS

## TEACHING

### Z80-ASSEMBLER MICRO-CONTROLLER

# MENTA

\*£115  
& VAT

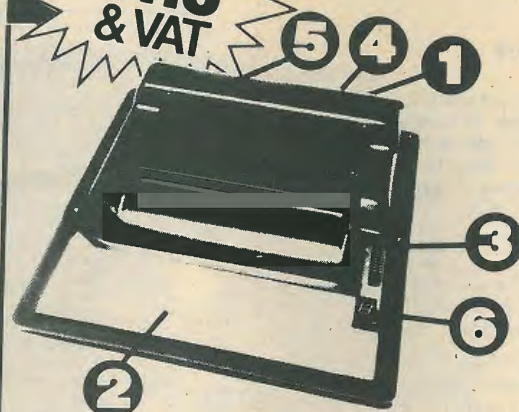

- 1 MONITOR or TV output (625 line UHF). PROGRAM, STACK and REGISTER contents visible.
- 2 40-KEY, 3-LEVEL KEYPAD with Z80 ASSEMBLER MNEMONICS and HEX. PROGRAM-EDIT, STEP, RUN etc.
- 3 24 bits of I/O can control external machinery, indicators etc.
- 4 CASSETTE INTERFACE.
- 5 BEEPER gives entry and error feedback.
- 6 LED gives prompt and page number.


**MENTA was designed to fulfil request of Schools Council's Modular Courses in Technology Project for "Microelectronics Teaching Devices" for use in a module which is now being tested in schools in Bromley. Inquiries are invited from Companies and Institutions with commitment to train students in SYSTEM DESIGN. MENTA is from the same stable as the SOFTY development systems.**

\*Price is for a SAMPLE UNIT with POWER SUPPLY and TV LEAD. £115 + £17.25 (15% VAT) = £132.25.

**DATAMAN DESIGNS,**  
Lombard House, Dorchester, Dorset DT1 1RX  
Dorchester (0305) 68066 (UK sales)  
Maiden Newton (0300) 20700 (Export)



# AMCRON INDUSTRIAL MUSCLE

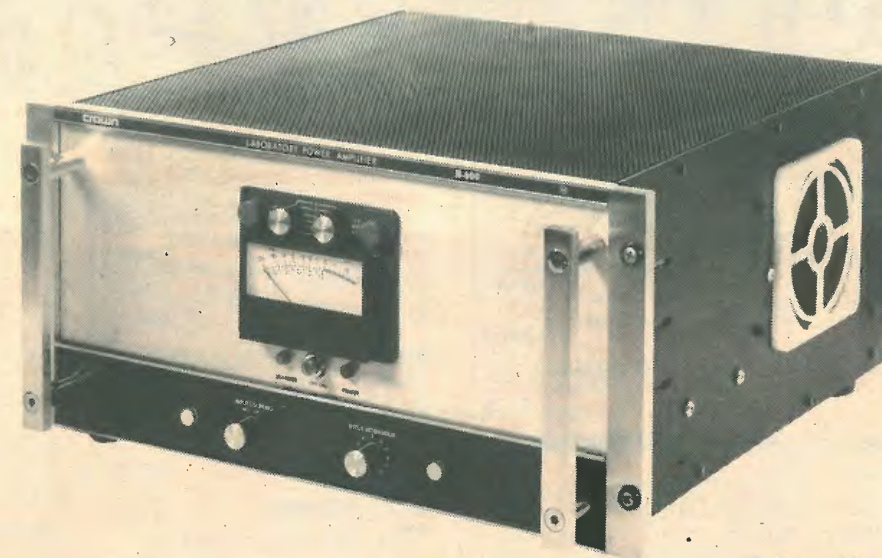

Model — M600

- ★ POWER RESPONSE DC — 45KHz ± 1dB.
- ★ OUTPUT POWER IN EXCESS OF 1.5KW INTO 2.75 Ohm LOAD (CONTINUOUS R.M.S.).
- ★ D.C. OUTPUT 20 AMPS AT 100 VOLTS OR 2KVA.
- ★ HARMONIC DISTORTION LESS THAN 0.05% DC-20KHz AT 1kW INTO 6 OHMS.
- ★ PLUG-IN MODULES: CONSTANT VOLTAGE/CURRENT, PRECISION OSCILLATORS ★ UNIPOLAR AND BIPOLAR DIGITAL INTERFACES, FUNCTION GENERATORS, AND MANY OTHERS.
- ★ OUTPUT MATCHING TRANSFORMERS AVAILABLE TO MATCH VIRTUALLY ANY LOAD.
- ★ FULL OPEN AND SHORT CIRCUIT PROTECTION GUARANTEED STABLE INTO ANY LOAD.
- ★ TWO UNITS MAY BE CONNECTED TO PROVIDE UP TO 4kW.
- ★ INTERLOCK CAPABILITY FOR UP TO EIGHT UNITS.
- ★ 3-YEAR PARTS AND LABOUR WARRANTY.
- ★ UNITS AVAILABLE FROM 100VA-12KVA.

For full details on all Amcron Products write or phone Chris Flack



## Analogue Associates

PROFESSIONAL AUDIO AND INDUSTRIAL ELECTRONICS


P.O. BOX 3  
ATTLEBOROUGH  
NORFOLK NR17 2PF  
Tel: 0953-452477

WW - 031 FOR FURTHER DETAILS

CURRENT USED Everything as new-

SEE US AT TESTMEX '81 STAND J8 WEMBLEY-OCTOBER 27,28,29

Everything as new-

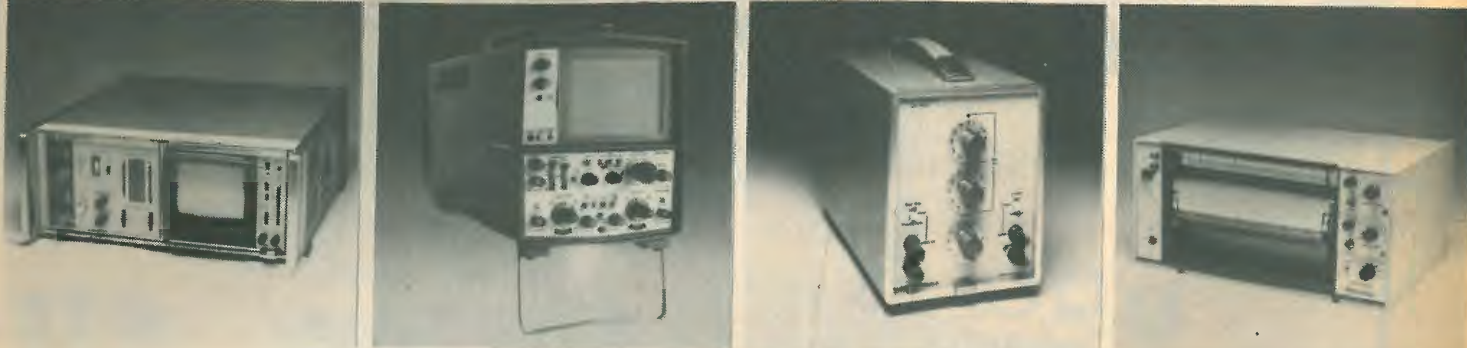

Hewlett Packard. 8407A/8412A. Network Analyser £1950.00

Tektronix T935A Oscilloscope DC-35MHz 2mV-10V/div. Delayed sweep. £595.00

Marconi TF2162 MF Attenuator DC-1MHz. 0-111dB. 600Ω £135.00 Quantities available - very good condition.

Yokagawa 3047 2 Channel Chart Recorder. 0.5mV-100V. 2cm/hr-60cm/min. £435.00

ANALOGUE VOLTMETERS AND MULTIMETERS



Boonton 93A True RMS Voltmeter. 10Hz-20MHz. 1mV-300V £295.00

Flika 883AB AC/DC Differential Voltmeter 20Hz-100kHz. 1mV-1kV. Very high accuracy £975.00

Hewlett Packard 400EL AC Millivoltmeter 10Hz-10MHz 1mV-300V. Log Scale £240.00

Marconi TF2600 AC Millivoltmeter. 10Hz-5MHz. 1mV-300V £175.00

TF2603 RF Millivoltmeter 50kHz-1.5GHz £525.00

TF2604 Electronic Voltmeter. AC 20Hz-1.5GHz. 300mV-1kV. DC 10mV-1kV. 0.2%-500MHz £350.00

Analysers General Radio 191A Sound and Vibration Analyser. C/W Graphic level recorder. 4.5Hz-25kHz. 1/3 or 1/10 octave £950.00

Marconi TF2370 Spectrum Analyser 30Hz-110MHz 0.1dB and 5Hz resolution £6500.00

Bridges & Component Testers Avo VCM163 Valve Tester £475.00

Boonton 63H Inductance Bridge. 0-110mH. Bridge frequency 5-500kHz £1250.00

General Radio 1608A LCR Bridge. Accuracy 0.05%. 0.05pF-100µF. 0.05µH-100H. 0.05mΩ-1.1MΩ £925.00

Marconi TF1245-TF1246-TF1247 'O' Meter and Oscillators. 0.5 to 500. 40kHz-300MHz £950.00

Rohde & Schwarz LRT (BNA100) Inductance Meter. 1pH-100µH 2.2-285kHz £395.00

Wayne Kerr B801B S161. R161 Admittance Bridge, Source and Detector LCR 1MHz - 100MHz 2% P.O.A.

Calibration Equipment Flika 332A DC Voltage Calibrator. 0 to 1111.1110V. 0.1ppm resolution. 0.003% calibration accuracy £1495.00

Tektronix 191 Constant Amplitude Generator. 350kHz-100MHz £350.00

DVM's and DMM's Datron 1051 5 1/2 Digit DMM. AC/DC Volts. Resistance. True RMS. 0.1µV resolution £750.00

Flika 8800A 0-5 1/2 digit LED AC/DC volts resistance. 0.1µV resolution. Battery/Mains £495.00

Hewlett Packard 3490A 5 1/2 Digit DMM. AC/DC volts. resistance. 1µV resolution. 30 day warranty £375.00

Philips PM2527 4 1/2 Digit DMM. AC/DC volts. current and resistance. 10µV resolution. £400.00

PM2514 3 1/2 digit Autoranging AC/DC volts current and resistance £95.00

Solartron A243 5 1/2 Digit DMM. AC/DC volts. resistance. 1µV resolution. 30 day warranty £375.00

7055 Microprocessor DMM. Scale Length 20,000. AC/DC volts. resistance 1µV resolution £600.00

7055 plus processor control and RS232 interface £900.00

7065 Microprocessor DMM. Scale length 1,400,000. AC/DC volts. resistance £695.00

7065 plus processor control and RS232 interface £995.00

7055 plus processor control and RS232 interface £900.00

466 Dual Trace Portable Storage Oscilloscope. Spec as per 464 but max writing speed 3000div/µs £2875.00

521A PAL Vectorscope. Measures Luminance Amplitude. Chrominance Phase. Chrominance Amplitude. Differential Phase and Gain. As new condition £2650.00

5403 with 5A18N 2MHz Dual Trace plug-in. 5A21N 1MHz differential plug-in. 5B42 Delay Sweep plug-in P.O.A.

T935A Oscilloscope DC - 35MHz 2mV-10V/div. Delayed sweep £595.00

7704A Main Frame C/W 7A26, 7B80, 7B85 Dual Trace DC - 200MHz £3550.00

Telegroup D63 Dual Beam Oscilloscope d/w 2 Off V4 Modules, 4 Traces. DC-15MHz. 5mV-20V/div £725.00

DB3 Oscilloscope Main Frame C/W V4 and 52A plug-in units. DC - 50MHz. 5mV-20V/div. Full delayed sweep. Very large CRT. £725.00

Oscilloscope Probes EB90 X1 Probe 1.2mtr length DC - 20MHz £9.00

EB91 X10 Probe. 1-2 mtr length DC - 100MHz £11.00

EB95 X1, X10 Probe. 1.2 mtr length DC - 10MHz or DC - 100MHz £15.00

Tektronix P6013 12KV 1000 x Probe. P.O.A.

P6015 40KV 1000 Probe P.O.A.

Power Supplies Advance MGS-60 5V @ 60A switching £160.00

MGS-20 5V @ 20A switching £120.00

MGS-10 5V @ 10A switching £95.00

MG24-12 24V @ 12A switching £130.00

Weir 762 Power Supply Unit 0-30V at 2A. Metered output. £90.00

465 Dual Trace Portable Oscilloscope. DC - 100MHz. 5mV-5V/div. Full delayed sweep £1350.00

466 Dual Trace Portable Storage Oscilloscope. Spec as per 464 but max writing speed 3000div/µs £2875.00

521A PAL Vectorscope. Measures Luminance Amplitude. Chrominance Phase. Chrominance Amplitude. Differential Phase and Gain. As new condition £2650.00

5403 with 5A18N 2MHz Dual Trace plug-in. 5A21N 1MHz differential plug-in. 5B42 Delay Sweep plug-in P.O.A.

T935A Oscilloscope DC - 35MHz 2mV-10V/div. Delayed sweep £595.00

7704A Main Frame C/W 7A26, 7B80, 7B85 Dual Trace DC - 200MHz £3550.00

Telegroup D63 Dual Beam Oscilloscope d/w 2 Off V4 Modules, 4 Traces. DC-15MHz. 5mV-20V/div £725.00

DB3 Oscilloscope Main Frame C/W V4 and 52A plug-in units. DC - 50MHz. 5mV-20V/div. Full delayed sweep. Very large CRT. £725.00

Oscilloscope Probes EB90 X1 Probe 1.2 mtr length DC - 20MHz £9.00

EB91 X10 Probe. 1-2 mtr length DC - 100MHz £11.00

EB95 X1, X10 Probe. 1.2 mtr length DC - 10MHz or DC - 100MHz £15.00

Tektronix P6013 12KV 1000 x Probe. P.O.A.

P6015 40KV 1000 Probe P.O.A.

Power Supplies Advance MGS-60 5V @ 60A switching £160.00

MGS-20 5V @ 20A switching £120.00


MGS-10 5V @ 10A switching £95.00

MG24-12 24V @ 12A switching £130.00

Weir 762 Power Supply Unit 0-30V at 2A. Metered output. £90.00

TEST EQUIPMENT except the price!

SEE US AT TESTMEX '81 STAND J8 WEMBLEY-OCTOBER 27,28,29

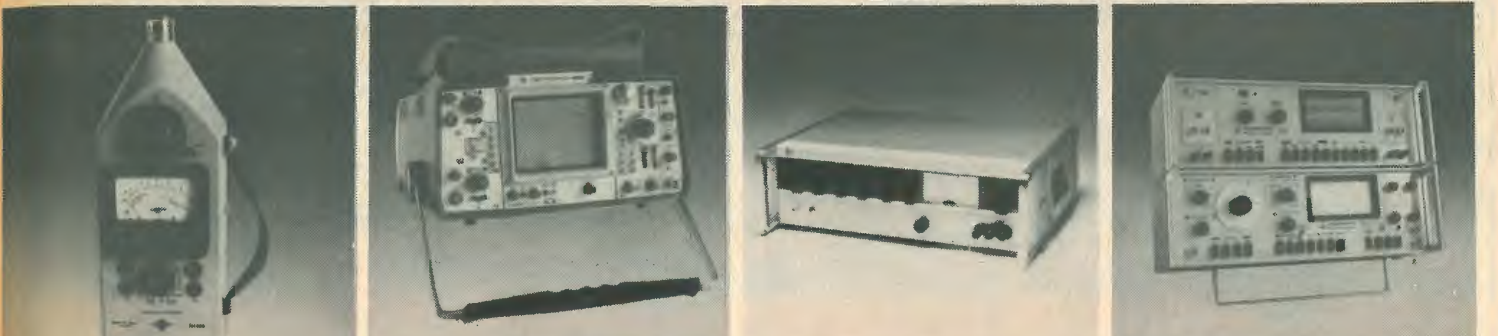

Bruel & Kjaer 2203 Sound Level Meter C/W 4165 1/2 in Microphone. 26-140dB A, B or C weighting. Fast or slow response. £395.00

Tektronix 455 Dual Trace Portable Oscilloscope DC-50MHz. 5mV-5V/div. Full delayed sweep. Super condition. £925.00

Hewlett Packard. 4204A Digital Oscillator. 10Hz-1MHz. 1mV-10V £695.00

Ferroglyph RTS2 + ATU1 Recorder Test Set measures wow and flutter, distortion, gain £375.00

Bargain In Unused Condition

RECORDERS

Brush 800 XY Recorder 100µV/DIV to 1.0V/DIV P.O.A.

Racal 7077 7D Tape Recorder 7 channels FM electronics DC - 20kHz. 1/2-60ips. £4500.00

S. E. Labs. 6012 50 Channel UV Recorder. Servo paper drive upto 5 mtr/sec. 12" paper. £1100.00

Watenabe ME841 6 Channel Chart Recorder 1mV-100V. 250mm scan width. £1495.00

Yokagawa 3047 2 Channel Chart Recorder. 0.5mV-100V. 2cm/hr-60cm/min. £435.00

Marconi TF144H/4 AM Signal Generator 10kHz-72MHz. 2µV-2V £750.00

TF1060/2 UHF Signal Generator 450-1200MHz £495.00

TF1370A Wide Range RC Oscillator. 10Hz-10MHz. Sine wave, square wave upto 100kHz £275.00

TF2002B AM/FM Signal Generator 10kHz-88MHz 0.1µV-1V 20Hz-20kHz Mod frequency £1200.00

TF2005R 2 Tone Signal Source. 20Hz-20kHz. 0-111dBm 0.1dB steps £295.00

TF2008 AM/FM Signal Generator 10kHz to 510MHz. Stability 5P.P.M. built-in sweeper. RF output 2µV to 200mV £2725.00

TF2015 AM/FM Signal Generator 10 to 520MHz £875.00

Philips PM6456 Stereo Generator. Separate L and R Signals. Carrier frequency 100MHz ± 1%. RF O/P 3mV pk-pk. £250.00

Radiometer SMG1 Stereo Generator L or R Channel internal or external modulation. 100MHz carrier at 10MV to 100MV £375.00

Hewlett Packard 203A Variable Phase Oscillator 0.005Hz-60kHz 0-360° £450.00

4204A Decade LF Oscillator 10Hz-1MHz. 1mV-10V into 600Ω £895.00

606A AM Signal Generator. 50kHz-65MHz £475.00

606B AM Signal Generator 50kHz-65MHz AM 0-95% £850.00

616B UHF Signal Generator 1.8 to 4.2GHz Int pulse Mod. £1000.00

651B Test Oscillator 10Hz-10MHz. 0.1mV-3.16V £415.00

3320A Frequency Synthesizer. 0.01Hz-13MHz. C/P range 0- +13dBm into 50Ω. Long term frequency accuracy ± 10 parts in 10^9 of setting per year. £995.00

8640B Phase Locked Signal Generator 0.5 to 520MHz £3200.00

8690A/8699B RF Sweeper System. 0.1-4GHz in 2 ranges. Max O/P 10mW to 2GHz and 6mW to 4GHz £2300.00

Large Quantities Available

TRANSMISSION MEASURING EQUIPMENT

Marconi TF2332 AF Transmission Test Set. 20Hz-20kHz £425.00

TF2343 Quantization Distortion Tester checks A.F. to A.F. distortion of P.C.M. Systems £600.00

Siemens D2040 Selective Level Analyser and Voltmeter 10Hz-60kHz - 110dB to +50dB 3µV-300V Lin and log indication 5 digit frequency readout £1200.00

D2072 + W2072 Level Meter and Oscillator 50kHz-100MHz - 110dB-OdB. Receive bandwidth 3.1 and 10kHz £2200.00

W2006 + D2006 Carrier Level Test Set. 10kHz-17MHz - 100 to +10dB £1650.00

W2007 + D2007 Carrier Level Test Set. 6kHz-18.6MHz - 120 to +20dB £1800.00

Wandel and Goltermann FF-1 Digital Error Rate Measuring Set. Consists of PRM-1 Digital Error Rate Meter and PFG-1 Pattern Generator £2490.00

PSO-5 and PMO-5 Level Measuring Set 10kHz-36MHz - 110 to +20dB. C/W AZD-1 Scale expander £2050.00

SPM-6 and PS-6 Level Measuring Set. 6kHz-18.6MHz - 110dB to +20dB Mains/battery operation. £2150.00

PCM-1 PCM Test Set. PDA-64 PCM Signalling Analyser. PSM-4 Level Measuring Set Scanner. PDG-1 Digital Signal Generator. PDA-1 PCM Digital Signal Analyser P.O.A.

1981 Sound Level Meter. 70-120dB. Digital and analogue reading. Peak hold. A weighting £300.00

1983 Sound Level Meter. 70-120dB. A weighting £195.00

T.V. TEST EQUIP Tektronix 141A PAL Signal Generator. High quality test signals for 625 line £1500.00

148 PAL TV Insertion Generator. Provides all required signals to test and measure on video TX systems. Immaculate £2500.00

1481C PAL Waveform monitor in as new condition. £2275.00

Philips PM5501 PAL TV Pattern Generator. £180.00

Brüel and Kjaer 2409 Electronic Voltmeter True RMS. Average and Peak 2Hz-200kHz £350.00

Ferroglyph RTS2 Recorder Test Set Measures Wow & Flutter. Distortion. Gain £345.00

RTS2 + ATU-1 Recorder Test Set and auxiliary test set £375.00

Hewlett Packard 332A Distortion Meter. 5Hz-600kHz £595.00

334A Auto Nulling Distortion meter. 5Hz-600kHz. 0.1%-100% FS. AM detector I/P £800.00

4329A Insulation Resistance Meter. Range 500kΩ to 2 x 10^14Ω £500.00

8745A S Parameter Test Set. Fitted with 11604A Universal Arms 0.1-2GHz £2750.00

Marconi TF791D Deviation Meter. 4-1024MHz £195.00

TF21635 UHF Attenuator 0-142dB 50Ω impedance DC-1GHz £250.00

TK2214 X-Y Memory £250.00

TF2331 AF Distortion Meter 20Hz-20kHz. 0.1%-100% 1mV-30V voltage range £395.00

TF2500 AF Power Meter. 7 ranges 100µwatts to 25 watts. Impedance 2.5Ω to 20kΩ in 40 steps £275.00

TM8339 AC/DC mixer for TF2702 £295.00

Miles Hivolt IT30 Insulation Tester ministry version CT587/3 (mini) £850.00

Rohde and Schwarz. MSC Stereo Coder. 30Hz-15kHz £500.00

Tektronix TM504 Main Frame £100.00

DC503 100MHz Counter £195.00

DM502 3 1/2 Digit DMM £150.00

FG503 0.1Hz-3MHz Function Generator £195.00

PS503A Power Supply £265.00

5 GOOD REASONS WHY YOU SHOULD DEAL WITH ELECTRONIC BROKERS

- 1 FULL GUARANTEE At Electronic Brokers we give you a TWELVE MONTHS WARRANTY on test equipment and 90 DAYS ON MOST COMPUTER PERIPHERALS. And we'll stand behind it all the way.
2 FAST DELIVERY When you buy used equipment from Electronic Brokers, it can be yours in a matter of only days. No waiting for manufacturers lengthy production schedules.
3 LOWEST PRICES As the leading Second User Equipment company in Europe, we are able to buy in bulk selecting only the very best equipment. This means we can sell to you at the lowest possible prices.
4 SUPERBLY MAINTAINED EQUIPMENT When you buy from Electronic Brokers you know the equipment is in 'top notch' condition. It is refurbished in our own service laboratories and checked to meet the manufacturer's sales specifications.
5 STATE-OF-THE-ART-TECHNOLOGY At Electronic Brokers, we carry large stocks of modern test and computer equipment, and our strong buying power means we are able to purchase the very latest state-of-the-art technology.

Electronic Brokers Limited 61/65 Kings Cross Road London WC1X 9LN England Telephone: 01-278 3461 Telex: 298694 Elebro G

Hours of Business: 9a.m. - 5p.m. Mon-Fri. Closed lunch 1-2p.m. ADD 15% VAT TO ALL PRICES. Carriage and Packing charge extra on all items unless otherwise stated. A copy of our Trading Conditions is available on request.



WW-200 for further details

New test equipment catalogue just out. Send for your free copy now.



# Electronic Brokers

## CURRENT USED DEC

### Computer equipment and peripherals



PDP11/70 Systems available from £22,000



PDP11/34 wide range of CPU's available from £4000



DEC LA38-GA DECwriter IV Terminal with tractor feed, paper out, numeric pad and datalead. As new. . . . £495.00



Tektronix 611XY storage display graphics monitor from £1150 to £1500

#### PDP11 SYSTEMS

PDP11/34A 128KB MOS, KY11-LB Programmers Panel, DL11W Interface, 2 x RLO2 Disk Drives and Controller, 6ft. Cabinet, VT100 Console. **£11,500.00**  
 PDP11/34A 128KB MOS, KY11-LB Programmers Panel, DL11W Interface, RK05J and RK05F Disk Drives and Controller, 6ft. Cabinet, DECwriter IV Console. **£9,950.00**  
 PDP11/34A 256KB MOS, KY11-LB Programmers Panel, DL11W Interface, 2 x RLO2 Disk Drives and Controller, 6ft. Cabinet, VT100 Console. **£19,750.00**  
 PDP11/34A 128KB MOS, KY11-LB Programmers Panel, DL11W Interface, 2 x RK07 Disk Drives and Controller, 6ft. Cabinet, VT100 Console. **£12,750.00**

PDP11/60, 128KB MOS, 2 RK06 Disk Drives. **£9,995.00**

**PDP11 C.P.U.s**  
 DEC.  
 11/34A 10 1/2" 64KB MOS. **£4,950.00**  
 11/34 10 1/2" 128KB MOS. **£5,850.00**  
 11/34A 10 1/2" 256KB MOS. **£7,250.00**  
 11/40 32KW Core, 6ft Cab. **£2,750.00**  
 11/60 128KB MOS, 2RK06. **£9,995.00**

**PDP11 MEMORY**  
 DEC.  
 MM11DP 16KW Core. **£375.00**  
 MS11P 16KW MOS. **£375.00**  
 MS11KE 32KW ECMOS. **£1,850.00**  
 MS11LB 128KB MOS. **£1,495.00**  
 MS11LD 256KB MOS. **£3,450.00**

**PDP11 OPTIONS**  
 DEC.  
 BA11KF Expander Box. **£1,325.00**  
 DD11A 4-slot backplane. **£125.00**  
 DD11B 4-slot backplane. **£150.00**  
 DL11 Serial Interface. **£250.00**  
 DL11W A/B Serial Interface. **£395.00**  
 DZ11A 8-line multiplexer. **£1,395.00**  
 DZ11B 8-line expander MUX. **£995.00**  
 FP11E Floating Point (11/60). **£1,975.00**  
 KE11B Extended Arithmetic. **£595.00**  
 KL11 TTY Interface. **£150.00**  
 KW11P Programmable Clock. **£345.00**  
 M105 Device Selector. **£30.00**  
 M7264 LS11 Processor Card + 4K RAM. **£250.00**

**DISKS**  
 DEC.  
 RK05J 2.5 meg. **£1,500.00**  
 RK05F 5 meg. **£1,750.00**  
 RK06 14 meg. **£2,750.00**  
 RK611 14 meg + Ctrl. **£4,500.00**  
 RK07 28 meg. **£4,750.00**  
 RK711 28 meg + Ctrl. **£6,500.00**  
 RL01 5 meg. **£1,825.00**  
 RL02 10 meg. **£2,500.00**  
 RM02 67 meg [NEW]. **£8,500.00**  
 RKV11BD. **£1,350.00**

#### MAGNETIC TAPE

DEC.  
 TE10W 9-track 800 BP1 add-on drive TU10 7-track and 9-track decks available TE16 9-track dual density 800/1600 bpi

**POWER SUPPLIES**  
 DEC.  
 H720 Power supply for BA11 Expander Box. BRAND NEW SURPLUS. **£175.00**

**PDP8A C.P.U.**  
 DEC.  
 PDP8A Processors, systems and add-on memory usually available.

**PDP8A MEMORY**  
 DEC.  
 MM8AA 8KW Core. **£500.00**  
 MM8AB 16KW Core. **£995.00**

**PDP8E CPU, MEMORY, OPTIONS**  
 DEC.  
 DP8EB Communications Adaptor. **£395.00**  
 K8BE Positive 1/0 Bus. **£95.00**  
 K8BE Data Break. **£145.00**  
 K8BE Extended Arithmetic. **£695.00**  
 K8BE Asynchronous Interface. **£175.00**  
 KL8JA Asynchronous Interface. **£275.00**  
 KP8E Power fail/auto restart. **£95.00**  
 MM8E 4KW Core memory stack. **£175.00**  
 TABE Dual Cassette Drive and Controller. **£525.00**  
 TC08 DECtape control (Old type), 'as is condition'. **£50.00**  
 VT8E Set graphics Control Modules. **£250.00**

**TERMINALS**  
 DEC.  
 LA36 DECwriter 11 Keyboard Printer Terminal. The Terminal that has become an industry standard, with 132 column upper/lower case printing and switch-selectable speeds of 10, 15 & 30cps. Available with either 20mA or RS232 interface. NOW ONLY **£595.00**  
 LA180-PD matrix printer. **£895.00**  
 DECwriter IV Desktop terminal complete with tractor feed, paper-out, cable and keypad options. **£495.00**

**MISC. PERIPHERALS**  
 DEC.  
 PCI1A Reader Punch with unibus control module. **£1250.00**  
 TU60 Twin Cassette drive, new condition. **£500.00**  
 VT55 Graphics Terminal with integral hard copier. **£995.00**

**MISCELLANEOUS**  
 Calccomp  
 Drum Plotter model 565. **£1250.00**  
 Data General  
 Nova 1210 CPU type 8133-2 with 4KW 'AS IS'. **£395.00**  
 Houston Instruments  
 Flat bed Plotter type DP3 - 1/5. P.O.A.  
 Racal  
 Modern type LS126. P.O.A.

#### CABINETS

DEC  
 A selection of 6ft, 4ft and low-boy cabinets usually available - please ring for latest stocks.

**PRINTERS**  
 Centronics 101.  
 Heavy Duty Matrix printer with 64 ASCII upper case character set, 165 cps operation, 132 print positions with adjustable tractor feed, Parallel input. ONLY. **£495.00**

**Diablo Hyterm 1620**  
 Daisy-Wheel KSR (keyboard-send-receive) model with standard RS232 interface, 45 cps print speed, 110/150/300 baud, switch-selectable parity, top-of-form selector, Graphics capability under software control. **£1,275.00**  
**Diablo 1335**  
 Receive-only daisy wheel printer with parallel interface. **£895.00**

**Seikosha GP80.**  
 BRAND NEW - LOW COST MATRIX PRINTER IDEAL FOR MICROPROCESSOR USERS SUCH AS HOBBYISTS & EDUCATIONALISTS OR ANY LOW-BUDGET APPLICATION

★ Full upper/lower case ASCII PLUS GRAPHICS Mode  
 ★ 80-column printing with adjustable tractor feed  
 ★ Standard and double-width characters (12 cpi and 6 cpi)  
 ★ 30 cps print speed with 1-line buffer  
 ★ Standard parallel (Centronics-type) interface  
 ★ Optional interfaces available for RS232, IEEE488, Tandy, PET, Apple II  
 ★ ONLY **£199.00** (Mail order total **£234.60**)

**TALLY 1602**  
 160 cps Matrix Printer with full 96 upper/lower case ASCII character set 7 x 7 dot matrix, 132 columns with adjustable tractor feed, bidirectional printing, double-width character feature, self-test facility. Centronics-type parallel interface. **£875.00**

**Teletype.**  
 Low Cost Printer Offer.  
 Teletype 33 printer mechanism including case but no keyboard or electronics. 64 upper case ASCII, 10 cps, pinfeed platen, ideal for the electronic hobbyist ONLY. **£85.00**

**PAPER TAPE PUNCHES**  
 Digitronics.  
 P135/20 paper tape punch. Solenoid-actuated unit capable of punching 5 to 8 channel tapes at speeds up to 35 cps. Pulse amplitude 27 VDC. Compact table-top unit. **£95.00**  
**Fact 4070.**  
 The top quality punch that has become an industry standard. Asynchronous 75cps operation. Adjustable for punching 5, 6, 7 or 8 level tape. Self-contained desk-top unit incorporating supply and take-up spools, chad box, and TTL-compatible control logic. **£650.00**

#### VDUS

H1000 The low, low priced teletypewriter-compatible video display terminal, offering your choice of transmission speeds up to 9600 baud as well as parity generation and checking. 12 x 80 display upper case ASCII, RS232 interface, choice of baud rates Standard baud rates either (a) 110/300 or (b) 300/1200. £25 surcharge for other combinations up to 9600 baud. SUPER VALUE **£199.00**

H2000 Superb spec. including full XY cursor addressing and edit facility. 27 x 74 display, upper case ASCII, RS232 interface, switch-selectable baud rates. **£299.00**

H2000C NOW ALSO AVAILABLE with 25 x 80 line format and C-MOS logic. **£375.00**

Modular One. Now with upper/lower case, XY cursor addressing, 24 x 80 line display, dual density detachable keyboard, choice of 8 transmission rates up to 9600 baud. **£399.00**

Also available from time to time  
 Hazeltine 1500 from. **£575.00**  
 Hazeltine 1510 from. **£650.00**

**Tektronix**  
 4010-1 Graphics Terminal with high-resolution graphics mode, standard alphanumeric mode, printer port, integral stand. **£1,750.00**  
 4014-1 graphics terminal with enhanced graphics. **£695.00**

**KEYBOARDS**  
**New ASCII Keyboards**  
 KB756MF 56-station keyboard with full upper/lower case ASCII, parallel input, mounting frame for extra rigidity power requirements + 5V, -12V. **£39.00** (mail order total. **£47.15**)  
 KB771MF as per 756MF but with 71 keystrokes incorporating numeric pad and cursor control keys. **£65.00** (mail order total. **£77.05**)  
 KB702 Steel-enclosure for KB756 keyboard. **£18.00** (mail order total. **£23.00**)

**SURPLUS ASCII KEYBOARDS**  
 Clare-Pendar KB3, 63 Station reed-switch ASCII Keyboard with ROM and tested working, circuit diagram supplied. **£35.00** (mail order total. **£41.98**)  
 Clare-Pendar KB3 63-station reed-switch keyboard untested and without ROM (circuit supplied). **£15.00** (mail order total. **£18.98**)

# Electronic Brokers

## NEW PRODUCTS



### Hameg

BRAND NEW, JUST RELEASED

**HM 203 PORTABLE OSCILLOSCOPE (ILLUSTRATED)**

Dual Trace, DC to 20MHz, 8 x 10cm display. Rise time 17.5ns. Sensitivity 5mV/cm-20V/cm. Timebase 0.5µs-0.2s. X5 magnifier. X-Y operation. Auto or variable trigger. Channel 1, Channel 2, line and external. Coupling AC, or TV low pass filter. Weighs only 6Kg. Size (m.m.) H. 145, W. 285, D. 380. **Unbeatable value at £220.00**

**HM 307 OSCILLOSCOPE**  
 Single trace, DC to 10MHz. Rise time 35ns. 5mV/cm to 20V/cm. Timebase 0.5µs-0.2s. Built in component tester. LPS technique provides stable and reliable triggering up to 30MHz. **£138.00**

#### NEW MODEL.

**HM 412-5 OSCILLOSCOPE**  
 Dual Trace, DC to 20MHz, 8 x 10cm rectangular display with internal graticule. Rise time 17.5ns. Sensitivity 5mV/cm-20V/cm. Timebase 0.5µs-0.2s. X5 magnifier. X-Y operation. Z modulation. Auto (peak value) or variable trigger. Channel 1 or 2, altern. Ch. 1/ll, line ext. Sweep delay. Variable hold-off time. Weight 7.5Kg. **£350.00**  
**Still at only**

**HM 512-8 OSCILLOSCOPE**  
 Dual trace, DC - 50MHz. Rise time 7ns. 5mV/cm-20V/cm. Timebase 100ns/cm-25/cm. X5 magnifier. X-Y operation. Z modulation. Sweep delay and delay line permits viewing of leading edge. THE BEST PRICED 50MHz SCOPE ON THE MARKET AT **£580.00**

All the above scopes are available with P7 long persistence C.R.T's (except HM 307) prices on application  
**The above prices do not include carriage or VAT (15%). Please send for Technical Literature.**  
 W/W 202 for further details



### Fluke

**FLUKE 8050A (ILLUSTRATED)**  
 4 1/2 Digit LCD DMM with true RMS on AC volts and current. DC volts 200mV-1KV, 10µV resolution. AC volts 200mV-750V, 10µV resolution. DC/AC current 200µA-2A, 0.01µA resolution. Resistance 200Ω-20MΩ, 0.01Ω resolution. Also reads dB direct referenced to 16 stored impedances. Conductance ranges 2mS and 200nS. **£245** mains model **£285** mains battery.

**FLUKE 8012A**  
 3 1/2 Digit LCD DMM with true RMS on AC volts and current. DC volts 200mV-1KV, 100µV resolution. AC volts 200mV-750V, 100µV resolution. DC/AC current 200µA-2A, 0.1µA resolution. Resistance 200Ω-20MΩ, 0.1Ω resolution. Low resistance 2Ω and 20Ω, 1mΩ resolution. Conductance ranges 2mS-20µS-200nS. **£218.00** mains model **£244.00** mains battery.


**FLUKE 8010A**  
 3 1/2 Digit LCD DMM Same spec as 8012A plus a 10Amp AC/DC current range, but no low resistance range. **£167.00** mains model **£193.00** mains battery.

**FLUKE 8024A**  
 3 1/2 Digit hand held LCD DMM with peak hold level Detector and continuity tester. DC volts 200mV-1KV, 100µV resolution. AC volts 200mV-750V, 100µV resolution. DC/AC current 2mA-2A, 1µA resolution. Resistance 200Ω-20MΩ, 0.1Ω resolution. Conductance 20nS. Peakhold of AC or DC volts and current. Level detector operates around +0.8V reference. Audio tone on level and continuity. **£155.00**, carrying case **£8.00** extra.

**FLUKE 8020A**  
 3 1/2 Digit hand held LCD DMM. Spec as per 8024A with extra conductance range of 2mS but no peak hold, level or continuity ranges. Complete with carrying case **£125.00**

**FLUKE 8022A**  
 3 1/2 Digit hand held LCD DMM. Spec as per 8020A but no conductance ranges and slight reduction in accuracy. **£89.00** carrying case **£8.00** extra.

Also available a range of accessories including current shunts, EHT probe, rf probe, Temperature probe and touch and hold probe. Full details on request.  
**The above prices do not include carriage or VAT (15%). Please send for Technical Literature.**  
 W/W 203 for further details

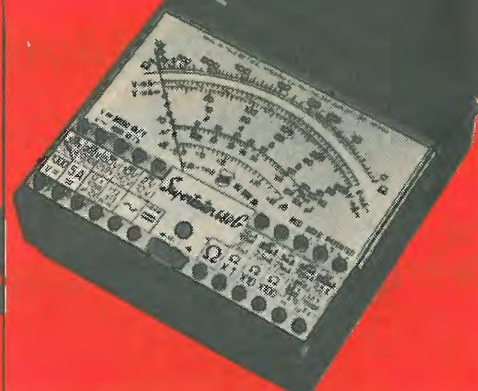

### I.C.E.

**680G MULTIMETER (ILLUSTRATED) 48 RANGES**  
 DC volts: 100mV-2-10-50-200-500-1000V AC volts: 2-10-50-250-1000-2500V DC current: 50-500µA-5-50-500mA-5A AC current: 250µA-2.5-25-250mA-2.5A Resistance Ω x 1-Ω x 10-Ω x 100-Ω x 1000 and Low Ω, full range 1Ω-10MΩ Up to 100MΩ can be measured using ext. AC supply, dB scale -10 to +22dB. OdB = 1mW into 600Ω. Sensitivity DC 20KΩ/V, AC 4KΩ/V. Accuracy 2.0% AC and DC. Battery Eveready No. 8 Overload capability 1000:1 on resistance ranges. Protected by internal 3Ω fuse. Size with case 10.8 x 11 x 3.7cm. Meter size 10cm. Supplied with leads and carrying case. **£24.50**

**680R HIGH ACCURACY MULTIMETER 80 RANGES**  
 DC volts: 100mV-2-10-50-200-500-1000V AC volts: 2-10-50-250-1000-2500V DC current: 50-500µA-5-50-500mA-5A AC current: 250µA-2.5-25-250mA-2.5A X2 switch on all voltage and current ranges except 2500V AC setting. Resistance: Ω x 1-Ω x 10-Ω x 100-Ω x 1000 and Low Ω, full range 1Ω-10MΩ, up to 100MΩ can be measured using ext. AC supply, dB scale -10 to +22dB. OdB = 1mW into 600Ω. Sensitivity DC 20KΩ/V, AC 4KΩ/V. Accuracy DC 1%, AC 2%. Battery Eveready No. 3. Overload capability 1000:1 on resistance ranges. Protected by internal 3Ω fuse. Size with case 13.7 x 10.4 x 5.4cm. Meter size 12cm. Supplied with leads and carrying case. **£32.00**

**MICROTEST 80 POCKET SIZED MULTIMETER 40 RANGES**  
 DC volts: 100mV-2-10-50-200-1000V AC volts: 1.5-10-50-250-1000V DC current: 50-500µA-5-50-500mA-5A AC current: 250µA-2.5-25-250mA-2.5A Resistance: Ω x 1-Ω x 10-Ω x 100 and Low Ω, full range 1Ω-5MΩ dB scale -10 to +22dB. OdB = 1mW into 600Ω. Sensitivity: DC 20KΩ/V, AC 4KΩ/V. Accuracy 2% AC and DC. Battery Mallory RM 625N. Overload capability 1000:1 on resistance ranges. Protected by internal 3Ω fuse. Size with case 9.3 x 9.6 x 2.3cm. Meter size 8.5cm. Supplied with leads and carrying case. **£16.60**


Please add £1.50 carriage per meter plus 15% VAT on total meter and carriage price. Send for Literature.  
 W/W 204 for further details

Electronic Brokers Limited  
 61/65 Kings Cross Road  
 London WC1X 9LN England  
 Telephone: 01-278 3461  
 Telex: 298694 Elebro G

Hours of Business: 9a.m. - 5p.m. Mon-Fri. Closed lunch 1-2p.m.  
 ADD 15% VAT TO ALL PRICES  
 Carriage and Packing charge extra on all items unless otherwise stated.  
 A copy of our Trading Conditions is available on request.



**Zaerix** **WHO'S LOOKING....**  
 For  
**Sloping Front Boxes**  
**Double Angle Desk Consoles**  
 or  
**Overhang Fascia Display Cases**

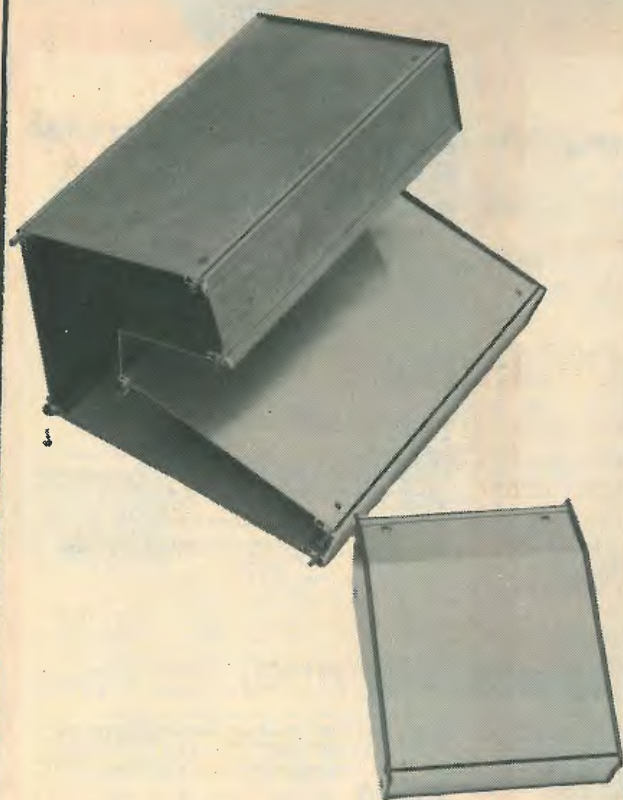

**You Are?**

Then look no further  
You're looking for one of our

**TOPBOXES**

Truely hundreds of options  
and  
Our prices won't make your eyes water

**Zaerix Electronics Limited**  
46 Westbourne Grove, London W2 5SF, England  
Tel: 01-221 3642 Telex: 261306

WW - 042 FOR FURTHER DETAILS

**FAST ERECTING**  
**CLARK**  
**MASTS**

**Here is the expertise you can depend on~**


**25**  
years in this specialist field

When you choose a mast from the comprehensive Clarke range you are assured of a high standard of Engineering and operational reliability.

Why compromise?

Extended heights 4 metres-30 metres, capable of lifting headload 1 kg.-200 kgs. Sectional or telescopic air operated for field or vehicle mounting. Write or phone us for details today.

CLARK W.T.16 vehicle-mounted in a Saviem-Renault. An air-operated telescopic mast mainly used for raising heavy antennas and instruments. Extended heights 3.2m. to 30.5m.

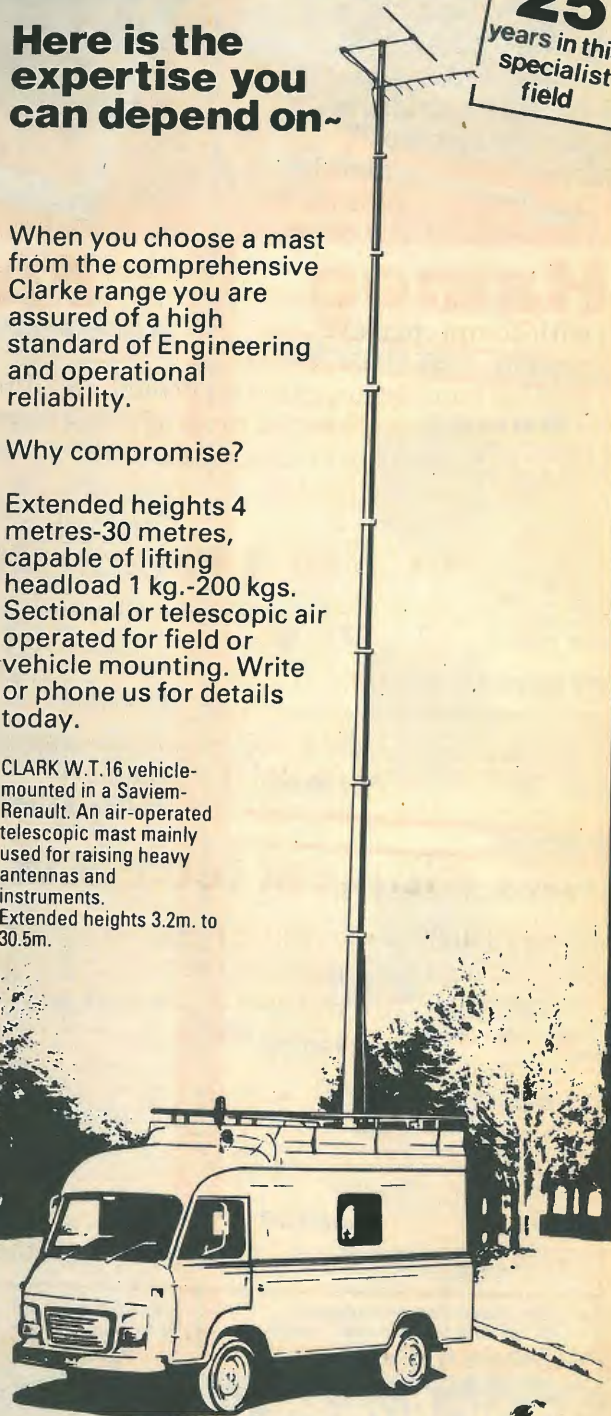

**CLARK MASTS LTD.**  
 Binstead,  
 Isle of Wight,  
 PO33 3PA, England.  
 Telephone: Ryde (0983) 63691, Telex: 86686.



WW - 011 FOR FURTHER DETAILS

**The EP4000 is not just an EPROM Programmer . . .**

Not only does the EP4000 copy, store, program and duplicate the 2704/2708/2716(3)/2508/2758/2716/2516/2532 and 2732 EPROMs without personality cards or modules, but also includes a video output for memory map display to make the powerful editing facilities really useful (and this is in addition to the in-built LED display for stand-alone use), but it also comes as standard with comprehensive input/output - RS232, 20mA loop, TTL, parallel handshake, cassette, printer and direct memory access. Now the programming power can be expanded with our range of add-on accessories listed below.



Made in the U.K.

**. . . but also a Real Time EPROM Emulator . . .**

Real time EPROM Emulation is the second major function of the EP4000. This facility allows the machine to directly replace your in-circuit EPROMs during the process of program development - the EP4000 can be configured to look like any EPROM it is capable of programming. The press of a button isolates

the external system so that data changes, entries, editing and downloading can be implemented. When the program is complete and working, the simulator cable can be replaced by an EPROM programmed by the EP4000.

**. . . with real technical back-up and service.**

The EP4000 comes with a technical manual describing every aspect of the machine - its purpose, its use, and how to use it. It also has a section describing the whole process of program development. And if you ever need technical help or advice, you can now dial direct to our technical department for instant attention - Tel. (0803) 863380. Finally, a full range of accessories is now available - these include Bipolar programming

modules, multi-EPROM simulator adaptors, buffer pods, EPROM Erasers, video monitors, 2764/2564 programming satellite, printer and production programmers. The EP4000 is ex-stock. Price - £545 + VAT (+£12 for DATAPOST delivery). Telephone, telex, write or call for full data and Distributor list, or place your order for immediate despatch - Overseas customers, please telex or write for quotation and terms. Agents in some countries, and distributors in Britain required.

**G.P. Industrial Electronics Ltd.**  
 Unit 6, Totnes Industrial Estate Totnes, Devon TQ9 5XL  
 Tel. Sales (0803) 863360. Technical (0803) 863380  
 Telex: 42596 GPELEC

WW - 050 FOR FURTHER DETAILS

# Worth waiting for...

Reaction from press, trade and public to the Quad ESL-63 has been rapturous. Hardly surprising since the virtues of the '63 are so readily apparent to all but the most jaundiced listeners.

Orders are pouring in from all over the world and demand far exceeds initial supply. It is an enviable position for a manufacturer to have a full order book, but frustrating for potential customers.

To alleviate the problem, we have devised an ordering


system which ensures fair and orderly distribution. Your Quad dealer has full details.

We are increasing production as quickly as possible but to do so without compromising product quality necessarily limits the rate at which this can be done. We have allocated a major portion of production to meet the requirements of the U.K. market.

Of course we have to export. Quad needs the prestige and Great Britain needs the currency.

You will have to wait to acquire a pair of Quad ESL-63s, but in these gloomy days it is comforting to be associated with another Quad, hence British, success and your patience will be rewarded by many years of listening pleasure.

## ...or an apology for success.

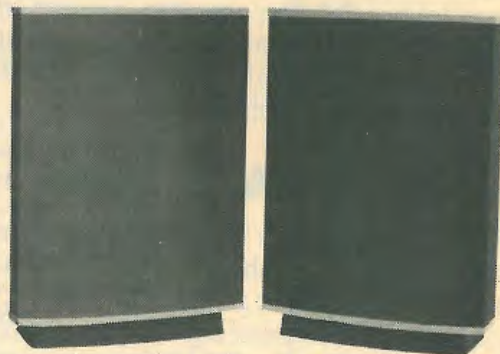

The Quad ESL-63 is well worth waiting for.

**QUAD**   
for the closest approach to the original sound


The Acoustical Manufacturing Co. Ltd., Huntingdon PE18 7DB. Telephone: (0480) 52561.

QUAD is a registered trade mark.

WW - 007 FOR FURTHER DETAILS

# Data recording and analysis:

meet the time shrinker!

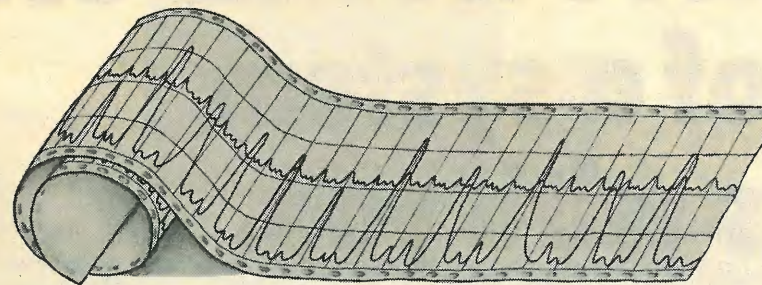

If you need to record and analyse data from multiple inputs, consider the advantages of using the Microdata M1600L data logger.

**Magnetic tape cartridge** Because it records on a standard 1/4 inch magnetic tape cartridge in ECMA/ANSI format, the output can be replayed at high speed into a computer, calculator or other data processing equipment. Alternatively, the internal replay facility of the data logger can be used. *No other data logger has this capability.*

**Individual conditioning cards** Individual, plug-in signal conditioning cards are used - one for each of the 20 input channels (expandable up to 100). As a result, each customer receives a bespoke instrument ready to handle mixed


analogue and digital inputs from most transducers. Cards are available at low cost to condition virtually every type of electrical signal, to reconfigure the instrument for different projects. *No other data logger offers these facilities.*

**Exceptional versatility** The M1600L is available either as a mains powered, free-standing, laboratory instrument or in the portable weatherproof form operating from its internal batteries. For more permanent installation in existing systems, it can be supplied in chassis form for mounting in a 19 inch rack. *No other data logger displays this versatility.*

The M1600L is now widely adopted for projects in energy, transportation, agricultural and environmental research. If you would like further details, please

write, telephone, or return this advertisement clipped to your letterheading.

MICRODATA LIMITED, MONITOR HOUSE, STATION ROAD, RADLETT, HERTS. WD7 8JX, ENGLAND. Telephone: RADLETT (09276) 3333. Telex: 924937.

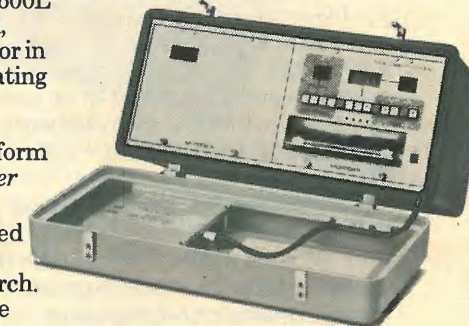

**MICRODATA** - leaders in the field

WW - 027 FOR FURTHER DETAILS

## SIEMENS

### The all-standard TV aerial tester - for both the professional and enthusiast

The Siemens S43202-M-C TV Antenna Level Meter is a portable, self-contained unit which greatly simplifies antenna orientation to receive TV signals including those of foreign transmission. Signals are visually monitored on the integral 70mm diameter screen, giving the facility of detecting ghosting, unlike meters relying on directional pointers.

The unit is very accurate, yet remarkably simple to operate and embodies all the technological sophistication allied with supreme reliability for which Siemens is recognised.

Contact Telecommunications Test Equipment Department at:  
Siemens Limited, Siemens House, Windmill Road, Sunbury-on-Thames, Middlesex.  
Tel. Sunbury-on-Thames 85691  
Telex 8951091



### A Siemens tester for all standards

WW - 012 FOR FURTHER DETAILS



# Sinclair ZX81 Personal Computer - the heart of a system that grows with you.

1980 saw a genuine breakthrough - the Sinclair ZX80, world's first complete personal computer for under £100. Not surprisingly, over 50,000 were sold.

In March 1981, the Sinclair lead increased dramatically. For just £69.95 the Sinclair ZX81 offers even more advanced facilities at an even lower price. Initially, even we were surprised by the demand - over 50,000 in the first 3 months!

Today, the Sinclair ZX81 is the heart of a computer system. You can add 16-times more memory with the ZX RAM pack. The ZX Printer offers an unbeatable combination of performance and price. And the ZX Software library is growing every day.

### Lower price: higher capability

With the ZX81, it's still very simple to teach yourself computing, but the ZX81 packs even greater working capability than the ZX80.

It uses the same micro-processor, but incorporates a new, more powerful 8K BASIC ROM - the 'trained intelligence' of the computer. This chip works in decimals, handles logs and trig, allows you to plot graphs, and builds up animated displays.

And the ZX81 incorporates other operation refinements - the facility to load and save named programs on cassette, for example, and to drive the new ZX Printer.



Every ZX81 comes with a comprehensive, specially-written manual - a complete course in BASIC programming, from first principles to complex programs.

## Kit: £49.95

### Higher specification, lower price - how's it done?

Quite simply, by design. The ZX80 reduced the chips in a working computer from 40 or so, to 21. The ZX81 reduces the 21 to 4!

The secret lies in a totally new master chip. Designed by Sinclair and custom-built in Britain, this unique chip replaces 18 chips from the ZX80!

### New, improved specification


- Z80A micro-processor - new faster version of the famous Z80 chip, widely recognised as the best ever made.
- Unique 'one-touch' key word entry: the ZX81 eliminates a great deal of tiresome typing. Key words (RUN, LIST, PRINT, etc.) have their own single-key entry.
- Unique syntax-check and report codes identify programming errors immediately.
- Full range of mathematical and scientific functions accurate to eight decimal places.
- Graph-drawing and animated-display facilities.
- Multi-dimensional string and numerical arrays.
- Up to 26 FOR/NEXT loops.
- Randomise function - useful for games as well as serious applications.
- Cassette LOAD and SAVE with named programs.
- 1K-byte RAM expandable to 16K bytes with Sinclair RAM pack.
- Able to drive the new Sinclair printer.
- Advanced 4-chip design: micro-processor, ROM, RAM, plus master chip - unique, custom-built chip replacing 18 ZX80 chips.

## Built: £69.95

### Kit or built - it's up to you!

You'll be surprised how easy the ZX81 kit is to build: just four chips to assemble (plus, of course the other discrete components) - a few hours' work with a fine-tipped soldering iron. And you may already have a suitable mains adaptor - 600 mA at 9 V DC nominal unregulated (supplied with built version).

Kit and built versions come complete with all leads to connect to your TV (colour or black and white) and cassette recorder.

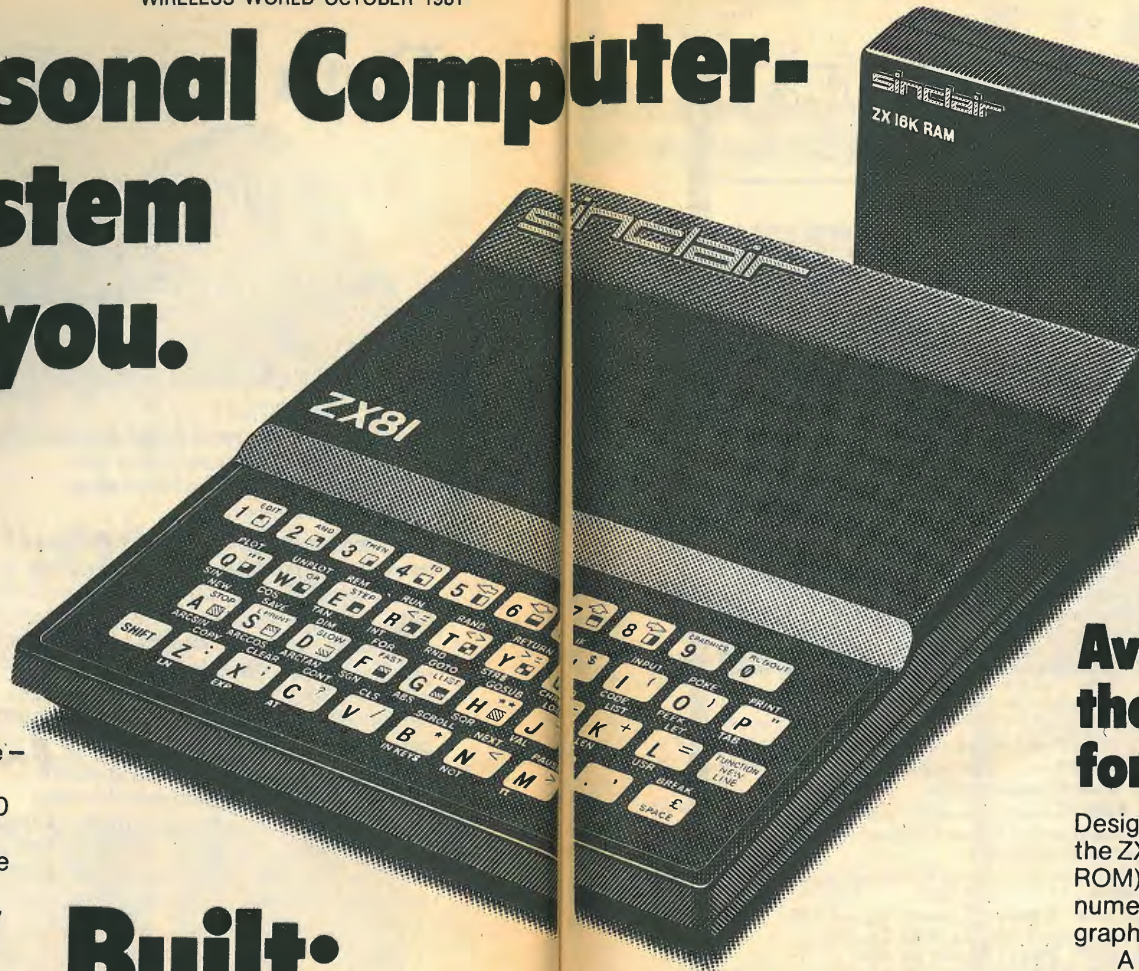

## Available now - the ZX Printer for only £49.95

Designed exclusively for use with the ZX81 (and ZX80 with 8K BASIC ROM), the printer offers full alpha-numerics and highly sophisticated graphics.

A special feature is COPY, which prints out exactly what is on the whole TV screen without the need for further instructions.

At last you can have a hard copy of your program listings - particularly

useful when writing or editing programs.

And of course you can print out your results for permanent records or sending to a friend.

Printing speed is 50 characters per second, with 32 characters per line and 9 lines per vertical inch.

The ZX Printer connects to the rear of your computer - using a stackable connector so you can plug in a RAM pack as well. A roll of paper (65 ft long x 4 in wide) is supplied, along with full instructions.

## 16K-byte RAM pack for massive add-on memory.

Designed as a complete module to fit your Sinclair ZX80 or ZX81, the RAM pack simply plugs into the existing expansion port at the rear of the computer to multiply your data/program storage by 16!

Use it for long and complex programs or as a personal database. Yet it costs as little as half the price of competitive additional memory.

With the RAM pack, you can also run some of the more sophisticated ZX Software - the Business & Household management systems for example.

### How to order your ZX81

BY PHONE - Access, Barclaycard or Trustcard holders can call 01-200 0200 for personal attention 24 hours a day, every day.  
BY FREEPOST - use the no-stamp-needed coupon below. You can pay

by cheque, postal order, Access, Barclaycard or Trustcard.  
EITHER WAY - please allow up to 28 days for delivery. And there's a 14-day money-back option. We want you to be satisfied beyond doubt - and we have no doubt that you will be.

To: Sinclair Research Ltd, FREEPOST 7, Cambridge, CB2 1YY.				Order
Qty	Item	Code	Item price £	Total £
	Sinclair ZX81 Personal Computer kit(s). Price includes ZX81 BASIC manual, excludes mains adaptor.	12	49.95	
	Ready-assembled Sinclair ZX81 Personal Computer(s). Price includes ZX81 BASIC manual and mains adaptor.	11	69.95	
	Mains Adaptor(s) (600 mA at 9 V DC nominal unregulated).	10	8.95	
	16K-BYTE RAM pack.	18	49.95	
	Sinclair ZX Printer.	27	49.95	
	8K BASIC ROM to fit ZX80.	17	19.95	
	Post and Packing.			2.95

Please tick if you require a VAT receipt

TOTAL £ \_\_\_\_\_

\*I enclose a cheque/postal order payable to Sinclair Research Ltd, for £ \_\_\_\_\_

\*Please charge to my Access/Barclaycard/Trustcard account no. \_\_\_\_\_

\*Please delete/complete as applicable. \_\_\_\_\_ Please print.

Name: Mr/Mrs/Miss \_\_\_\_\_

Address: \_\_\_\_\_

FREEPOST - no stamp needed. Offer applies to UK only. WRW 10

**sinclair**  
**ZX81**  
6 Kings Parade, Cambridge, Cambs., CB2 1SN.  
Tel: (0276) 66104 & 21282.

WW - 005 FOR FURTHER DETAILS

# Carston

Second User Test Equipment, Calibrated to Manufacturer's original specification.

**Prices from £**

SMITHS	
RE541 Chart 8" 1 pen 8 speed	250
RE501/4701 Chrt 4" + XY 1ch 10 spd	
AC Batt	200
SOLARTRON	
3240 Modular Data Logger system	P.O.A.
Note: UV recorders are priced less galvos	
<b>SIGNAL ANALYSIS EQUIPMENT</b>	
MARCONI	
TF2300A Mod Meter 1 MHz-1 GHz AM/FM	450
TF2330 Wave Analyser 20 Hz-50 KHz	425
Note: see also "Spectrum Analysers"	
<b>SIGNAL/FUNCTION/ + SWEEP GENERATORS</b>	
ADVANCE	
SG63D Generator 4-230 MHz AM/FM	200
GENERAL RADIO	
1362 Generator 220-920 MHz	375
HEWLETT PACKARD	
8640B Generator 500 KHz-512 MHz AM/FM Phase Lock	3800
618B Generator 3.8-7.5 GHz	975
612 Generator 450-1230 MHz	750
614 Generator 0.8-2.1 GHz	825
MARCONI	
TF144H/4S Generator 10 KHz-72 MHz AM	550
TF801D Generator 10 MHz-470 MHz AM	180
TF2012 Generator 400-520 MHz FM	550
PHILIPS	
PM5127 Function 0.1 Hz-1 MHz Sin Sq Tr Rmp	450
TEXSCAN	
9900 Sweeper 10-300 MHz 6/in CRT disp	525
VS60 Sweeper 5-1000 MHz	890
<b>SPECTRUM ANALYSERS</b>	
HEWLETT PACKARD	
141T/8552B/8555A Complete .01-18 GHz	8500
3580A 5 Hz-50 KHz with digit store disp	2450
8445A Pre-selector 0.01-18 GHz	2000
8558B 0.1-1500 MHz Plug-in for 180 series	3750
<b>VOLT/MULTI-METER (ANALOGUE)</b>	
AVO	
8 Mk4 AC/DC/—VI + Ω	70
BOONTON	
92C AC/RF 10 KHz-1.2 GHz 1/2 mV-3V	350
HEWLETT PACKARD	
400E 10 Hz-10 MHz 1mV-300V DC O/P	285
400H 10 Hz-4 MHz 1mV-300V	75
411A 0.5-500 MHz 10mV-10V DC O/P	175
3400A TRMS 10 Hz-10 MHz 1mV-300V DC O/P	390
MARCONI	
TF2603 10 KHz-1.5 GHz 300V-3V	300
TF2604 20 Hz-1.5 GHz 300mV-300V	425
PHILIPS	
PM2454B 10 Hz-12 MHz 1mV-300V DC O/P	250
RACAL	
9301 RMS 10 KHz-1.5 GHz 100V-300V	550
VIBRON/E.I.L.	
33B-2 1mV-1V Electrometer	200
<b>VOLT/MULTI-METER (DIGITAL)</b>	
ADVANCE	
DNM7A 1999FSD AC/DC/VII/Ω	100
BOONTON	
92AD 1999FSD 10 KHz-1.2 GHz 10V res	525
FLUKE	
8010A 2000 FSD TRMS AC/DC/VII/Ω	140
8010A01 As 8010A + re-charging batteries	159
8020A 2000 FSD Handheld AC/DC/VII/Ω + cond.	99
8022A 2000 FSD Handheld AC/DC/VII/Ω	75
8030A-1 2000 FSD AC/DC/VII/Ω Batt + AC	165
8050A 2000 FSD AC/DC/VII/Ω dB TRMS	215
8800A 20000 FSD AC/DC/VII/Ω	550
HEWLETT PACKARD	
3490A 10000FSD AC/DC/VII/Ω	625
SOLARTRON	
A200 1999FSD DC only 1V-1KV	85
A203 1999FSD AC/DC/VII/Ω	175
A205 1999FSD TRMS AC/DC/VII/Ω	195


## Henry's COMPUTER KIT DIVISION

## TANGERINE COMPUTER SYSTEMS LONDON & HOME COUNTIES STOCKISTS

404 EDGWARE RD. LONDON, W2 1ED TEL: 01-402 6822

### TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE

#### MICROTAN 65

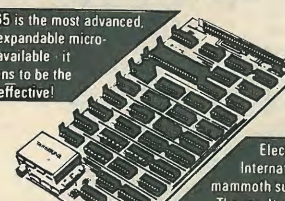

Microtan 65 is the most advanced, powerful, expandable micro-computer available - it also happens to be the most cost effective!

Electronic Today International held a mammoth survey of kits. The result: Microtan 65 WINS COMPUTER CLASS!

#### MICRON COMPUTER

FULLY BUILT, TESTED, and housed in ATTRACTIVE CASES.



£395 inc. V.A.T. & P&P

#### TANEX £43.00

Minimum Config Kit. + V.A.T. £6.45, total £49.45.

**CONTENTS**  
High quality plated thru hole printed circuit board, solder resist and silk screened component identification. I.C. sockets for maximum expansion. 64 Way D.I.N. edge connector. 1K RAM, cassette interface, 16 parallel I/O lines, a T.T.L. serial I/O port, two 16 bit counter timers, data bus buffering, memory mapping, logic and discrete components for maximum expansion. TANEX users manual.

TANEX (Minimum configuration) Assembled. **£53.00 + V.A.T. £7.95, total £60.95.**

**MICROTAN 65 CONTENTS**  
High quality, plated thru hole printed circuit board, solder resist and silk screened component identification. 6502 microprocessor. 1K monitor TANBUG. Now with 'V' Bug. 1K RAM for user programme, stack and display memory. VDU alphanumeric display of 16 rows by 32 characters. MICROTAN 65 system file binder. 136 page, bound, users hardware/software manual with constructional details and sample programmes. Logic and discrete components to fully expand MICROTAN 65.

The MICROTAN 65 kit has won widespread acclaim for its superb presentation. We pay attention to detail!

KIT FORM **£69.00 + £10.35 V.A.T.**, total **£79.35.**

MICROTAN 65 assembled and tested. Specification as above, but assembled and fully bench tested by ourselves. **£79.00 + £11.85 V.A.T.**, total **£90.85.**

6502 based microcomputer VDU alpha numeric display. Powerful monitor TANBUG. 8K RAM. 32 parallel I/O lines. 2 TTL serial I/O lines. Four 16 Bit counter timers. Cassette interface. Data bus buffering. Memory mapping control. 71 key ASCII Keyboard, including numeric keypad. Includes power supply. Also includes the first 10K MICROSOFT BASIC\* available in the U.K. All the usual BASIC commands.

#### TANEX EXPANSION

Expanded. TANEX offers: 7K RAM, locations for 4K EPROM (2716), locations for 10K extended MICROSOFT BASIC, 32 parallel I/O lines, two TTL serial I/O ports, a third serial I/O port with RS232/20mA loop, full modem control and 16 programmable baud rates, four 16 bit counter timers, cassette interface, data bus buffering, and memory mapping.

**EXPANDED TANEX KIT** (Excludes ROM, XBUG and BASIC) **£89.70 + V.A.T. £13.46, total £103.16.**

**EXPANDED TANEX ASSEMBLED** **£99.70 + V.A.T. £14.96, total £114.66.**

**OPTIONS TO FULLY EXPANDED TANEX IN SIMPLE INEXPENSIVE STAGES.**

10K Extended MICROSOFT BASIC in EPROM (with manual) **£49.00 + V.A.T. £7.35, total £56.35.**

Extra RAM: 1K (2 x 2114) **£5.20 + V.A.T. 78p, total £5.98.**

SERIAL I/O KIT **£10.26 + V.A.T. £1.60, total £11.86.**

6522 VIA **£8.00 + V.A.T. £1.20, total £9.20.**

XBUG **£17.35 + V.A.T. £2.60, total £19.95.**

AS YOU CAN SEE THE PRICES OF OUR EXPANSION COMPONENTS ARE VERY, VERY COMPETITIVE!

**MICROTAN 65 OPTIONS**

**LOWER CASE PACK**  
Two integrated circuits which connect into locations on MICROTAN allowing 128 displayable characters. **£9.48 + £1.42, total £10.90.**

**MINI MOTHER BOARD**  
Used to connect Microtan to Tanex. Built **£10.00 + V.A.T.**

**GRAPHICS PACK**  
Five integrated circuits which connect into locations on MICROTAN allowing the display of chunky graphics (64 x 64 pixels). What are chunky graphics? Well, imagine a piece of graph paper with 64 squares vertically and 64 squares horizontally, a total of 4096. Each square can be made black on white. **£6.52 + V.A.T. 98p, total £7.50.**

**TANRAM**  
AVAILABLE NOW TANRAM - 40K Bytes on one board! Single board of bulk memory offering: 7K Static RAM (2114), and 32K Dynamic RAM (4116). Onboard refresh is totally transparent to CPU operation and is unaffected by normal DMA's. TANRAM fully expands the available address space of the 6502 microprocessor. MICROTAN, TANEX and TANRAM together provide 16K RAM, 48K RAM, and 1K I/O - that's a lot of memory and a lot of I/O! Built and tested. TANRAM ASSEMBLED.

**40K RAM CARD with 16K DYNAMIC RAM £76 + V.A.T.**  
CONTENTS: High quality plated thru hole printed circuit board, solder resist and silk screened component identification. Full complement of I.C. sockets for maximum expansion. 64 way D.I.N. edge connector. 1K RAM (2114). Data bus buffering. TANRAM users manual.

**EXTRA RAM:**  
1K STATIC (2114) **£2.95 each.** 16K DYNAMIC (4116) **£1.50 each.**

#### TANGERINE DISC SYSTEM

Z8 CONTROLLER CARD **£150.00 + V.A.T.**

DOUBLE SIDED DOUBLE DENSITY DRIVE **£215.00 + V.A.T.**

CP/M DISK OPERATING SYSTEM **£80 + V.A.T.**

**71 KEY ASCII KEYBOARD £56.34 + V.A.T.**  
NO EXTRAS NEEDED.  
Uses gold crosspoint keys. Includes numeric keypad and ribbon cable. Available as fully assembled and tested.

**SUPER METAL CABINET IN TANGERINE/BLACK £20.00 + V.A.T. £3.00, total £23.00.**

**20 WAY KEYPAD**  
Inexpensive means of getting up and running. Uses 'Schoeller' key-switches, and connects to MICROTAN through a 16 pin D.I.L. plug on ribbon cable. Black anodised escutcheon, with TANGERINE legends, finishes off what must be the best value for money keypad available. Available assembled and tested. **£10.00 + V.A.T. £1.50, total £11.50.**

\*Space Invaders game (for use with keypad only) **£15.22 + V.A.T. £2.28 total £17.50.**

**MEMORIES EXPAND YOUR SYSTEM WITH OUR TANGERINE APPROVED CHIPS.**

Discounts 10% for 4, 15% for 8, 20% for 16.

2102 1K x 1 Static RAM **80p** IM 6402 UART **£4.50**

2708 **£3.50** 2114 1K x 4 Static RAM **£2.95**

2716 **£6.50** 8080A **£5.00**

MK 4116 16K x 1 Dynamic RAM **£1.50** All plus V.A.T. 4118 1K x 8 Static RAM **£7.50**

#### PROFESSIONAL ASCII KEYBOARDS Ideal for Tangerine

**£29.95 + V.A.T.**

- 52 key 7 bit ASCII coded
- Positive strobe +5V-12V
- ASCII characters
- Parallel output with strobe
- Power light on control
- Chip by General Instrument (G.I.) TTL output
- Superbly made
- Size 13 x 5.5 x 1.5 ins.
- Black keys with white ledgens
- Escape shift return & reset keys
- Control repeat & bell keys
- Complete with DATA

**POWER SUPPLIES**  
MPS 1 Input 120 or 240V AC. Output 5 Volts at 3 Amps Regulated. MPS 1 will power both MICROTAN and TANEX fully expanded. Built on the same size printed circuit board as MICROTAN etc. Available as a fully built and tested unit. **£23.00 + V.A.T. £3.45, total £26.45.**

X MPSZ +5V 6A, +12V, -5 and -12V switch mode system PSU **£69.13 + V.A.T.**

#### CENTRONICS ideal for Tangerine PRINTERS

CENTRONICS P.I. **£150 + V.A.T.**

SHEIKOSHA **£199 + V.A.T.**

Model 730 **£350 + V.A.T.**

Model 737 **£395 + V.A.T.**

**MINI-SYSTEM RACK**  
We have produced a mini-system rack which accepts MICROTAN 65, TANEX and our mini-mother board. It has an integral power supply, just plug it into the mains and away you go! Finished in TANGERINE/BLACK, it gives your system the professional finish. Front panel access for I/O cables. **AVAILABLE AS AN ASSEMBLED UNIT. £43.00 + V.A.T. £6.45, total £49.45.**

#### NEW MICROTAN TEL POST OFFICE APPROVED PRESTEL - VIEWDATA

**£170 + V.A.T.**

\*FULL COLOUR GRAPHICS \* MICROTAN OWNERS CAN COMMUNICATE WITH EACH OTHER \* CAN STORE PRESTEL \* CAN BE USED AS AN EDITING TERMINAL \* CAN BE INTERFACED WITH PET, APPLE etc.

Just connect to the aerial socket of any colour or black and white domestic T.V. receiver and to your Post Office installed jack socket and you are into the exciting world of PRESTEL. Via simple push button use you are able to view 170,000 pages of up to the minute information on many services, order goods from companies - all this without leaving your armchair!

#### ADD-ON KEYPAD

A compact 12 button keypad suitable for use with above keyboard to extend its functions plus four extra keys. Supplied brand new with data. A non-encoded single mode keyboard.

LIST PRICE **£22.00**  
OUR PRICE **£7.95** + V.A.T.

**FULL SYSTEM RACK**  
For the man that has everything! 19 inch wide system rack which accepts: MICROTAN 65, TANEX and our mini-mother board, SEVEN FURTHER EXPANSION BOARDS, TANDOS and THE SYSTEM POWER SUPPLY. Available in many formats, e.g. Individual front panels, full width hinged front panel, back panel only or without connectors. **£49.00 + V.A.T. £7.35, total £56.35.**

**MONITORS (PROFESSIONAL)**  
RECONDITIONED AND NEW - FROM **£35.00** to **£129.95**

**NEW PRODUCTS**

**NOW AVAILABLE**

HIGH DEFINITION COLOUR GRAPHICS **£90.85 inc. VAT**

CONTROLLER CARD **£120.00 + V.A.T.**

SERIAL I/O CARD (FROM) **£58.00 - V.A.T.**

PARALLEL I/O CARD (FROM) **£47.50 - V.A.T.**

ROM CARD (BUILT) LESS ROM **£47.50 - V.A.T.**

AIM-KIM INTERFACE CARD **£59.00 - V.A.T.**

SERIAL I/O KIT **£17.25 inc. VAT**

SYSTEM MOTHER BOARD WITH 4 SOCKETS FOR SYSTEM RACK **£39 - V.A.T.**

SYSTEM MOTHER BOARD WITH 12 SOCKETS FOR SYSTEM RACK **£55 - V.A.T.**

32K RAM CARD **£115 - V.A.T.**

32K ROM CARD (LESS CHIPS) **£54.65 inc. VAT**

PLUS MANY NEW EXCITING PRODUCTS IN DEVELOPMENT AUTOMATICALLY AVAILABLE FROM US WHEN RELEASED BY OUR PRINCIPALS TANGERINE LTD.

All products are available from stock.

FULLY GUARANTEED \* BUY WITH CONFIDENCE

BRITISH DESIGN & MANUFACTURE AND ON DEMONSTRATION IN OUR COMPUTER DEPT.

**TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE • TANGERINE**

Stockist Enquiries on headed notepaper to: COMPUTER KIT LTD. (Principal Distributors in U.K.) 11/12 Paddington Green, London, W2. Tele: 01-723 5095 Telex: 262284 Ref 1400 TRANSONICS

**SEND FOR FREE BROCHURE**

All orders pre-paid and official advertised here and elsewhere in this magazine by TANGERINE to be forwarded DIRECTLY to COMPUTER DEPT., 11/12 PADDINGTON GREEN, LONDON W2

**Prices from £**

<b>ACOUSTIC &amp; VIBRATION</b>	
BRUEL & KJAER	
2113 Audio Frequency Spectrometer	1400
2203 Sound Level Meter	450
2305 Level Recorder	650
4230 Sound Level Calibrator	95
4424 Noise Dosimeter	375
<b>BRIDGES &amp; V and I STANDARDS</b>	
BONTOON	
71AR LCR Bridge	150
GENERAL RESISTANCE	
DAS56 DC V and I Calib 1μV-10V 30mA	600
<b>HEWLETT PACKARD</b>	
4261A Digital Automatic LCR Bridge	975
4342 QLC Meter 22 KHz-70 MHz	1100
MARCONI	
TF868A Universal LCR Bridge	250
TF1313 Universal LCR Bridge	350
WAYNE KERR	
B224 LCR Bridge 0.1%	500
B521 LCR Bridge	115
<b>COMMS &amp; CABLE TEST EQUIPMENT</b>	
CHASE	
35A Field Strength Meter 20-850 MHz	600
<b>HEWLETT PACKARD</b>	
3556A Psophometer 20 Hz-20 KHz	250
STC	
74216A Noise Generator CCIT	275
74261A Psophometer CCIT	375
TEKTRONIX	
1502 TDR Cable Tester CRT + Recorder	2950
<b>COMPUTER EQUIPMENT</b>	
CENTRONICS	
702 matrix printer	500
TEKTRONIX	
4610-1 Hard copy printer for 4010 series computer display terminals	1800
<b>COUNTERS &amp; TIMERS</b>	
FLUKE	
1910A-1 125 MHz 7 digit Cntr. AC/Batt	300
1911 250 MHz 7 Digit Counter	298
1912 520 MHz 7 Digit Counter	375
1912A01 As 1912A but inc. re-charging batteries	430
1920A14 1250 MHz otherwise as 1920A	575
HEWLETT PACKARD	
5300A 6 Digit Display Unit — P/in reqd.	99
5305B 1300 MHz Counter for 5300	325
5308A 75 MHz Counter Timer for 5300B	112
RACAL	
9024 600 MHz 7 1/2 digit Counter	220
9025 1 GHz 8 digit Counter	450
9905 200 MHz 8 digit Counter Timer	360
SYSTRON DONNER	
6053 3 GHz 9 digit Counter BCD O/P	790
5103B Strip Printer for 6053/6054	375
<b>DIGITAL TESTING EQUIPMENT</b>	
HEWLETT PACKARD	
1600A Logic Analyser 16ch 20 MHz	2300
1607 Logic Analyser 16ch 20 MHz	1500
5011T Logic troubleshooting kit	125
TEKTRONIX	
7D01F Logic Analyser 16ch 50 MHz P/in	2650
832 Datacomm Test V24/RS232/1 loop	1150
<b>MAINS TEST EQUIPMENT</b>	
COLE	
T1007 Volt/Freq/Spike Monitor Rec O/P	110
DATALAB	
DL019 Mains Interface for DL905	300
GAY	
LDM AC/DC/Spike/Time inc Printer	1250
<b>MISCELLANEOUS</b>	
COMARK	
1601BLS Thermom 10ch 87 + 1000°C type K	75
N.B. Thermocouples not included	
DATALAB	
DL901 Digital Transient Recorder	500
HEWLETT PACKARD	
X382A Rotary Vane Attenuator WG16	175

**Prices from £**

TEKTRONIX	
465 100 MHz 5mV 2 Trace 2T base	1150
465B 100 MHz 5mV 2 Trace 2TB, inc Probes	1550
475 200 MHz 2mV 2 Trace 2T base	1750
485 350 MHz 5mV 2 Trace 2T base	2300
661/4S3/5T1A 1 GHz Sampling scope	775
7A12 105 MHz 5mV 2 Trace Plug-in	300
7A18 75 MHz 5mV 2 Trace Plug-in	400
7A19 500 MHz 10mV 1 Trace Plug-in	950
7A22 1MHz 10μV Differential Plug-in	575
7A24 350 MHz 5mV 2 Trace Plug-in	950
7A26 200 MHz 5mV 2 Trace Plug-in	625
7B53A 2 Timebase Plug-in 100 MHz Trig	500
7B80 Single Timebase 400 MHz Trig	550
7B85 Timebase with delay 400 MHz Trig	650
7603 100 MHz CRT r/out 3 slot M/Frame	1250
7704A 200 MHz CRT r/out 4 slot M/Frame	1350
7904 500 MHz CRT r/out 4 slot M/Frame	3900
P6013A X1000 12KV Probe	95
P6201 FET Probe DC-900 MHz	300
<b>TELEQUIPMENT</b>	
D63/V1/V1 15 MHz 2 Trace 1mV	525
D83/V4/S2A 50 MHz 1mV 2 Trace 2T	
Big CRT	750
D1015 15 MHz 5mV 2 Trace TV trig	295
S1A Single T/base Plug-in 50 MHz trig	135
VUDATA	
PS935/975 35 MHz 5mV 2 Trace — unit has built-in 3 1/2 digit DMM + 3 1/2 dig. cnter	675
Note: we hold a range of cameras	P.O.A.
<b>OSCILLOSCOPES (STORAGE)</b>	
HEWLETT PACKARD	
1703A 35 MHz 10mV 2 Tr 2TB 1000 Div/ms	1400
TEKTRONIX	
466 100 MHz 5mV 2 Tr 2TB 1350cm/μs	2950
603 Bistable Storage Monitor XYZ amps	750
TR912 10 MHz 2mV 2 Tr 1TB 250cm/ms	650
7834 400 MHz 4 Slot M/Frame 2500cm/μs	4990
<b>POWER MEASUREMENT</b>	
FLUKE	
8921A 10 Hz-20 MHz 4 1/2 Digit & Analogue TRMS dBm/V meter 50Ω-1200Ω & 10MΩ	885
HEWLETT PACKARD	
8481A Type N Coax sensor for 435A	200
478A Type N Coax sensor for 432A	90
MARCONI	
TF2512 DC-500 MHz Powermeter	145
TF893A 10 Hz-20 KHz Powermeter	135
<b>POWER SUPPLIES etc</b>	
ADVANCE	
1V5S Inverter 24V DC to 240V AC 500W	300
FARNELL	
FFS1 5V — 20 A PSU module	100
L30B 0-30V variable 1A Metered	50
FLUKE	
415B 0-3.1 KV variable 30mA Metered	550
HEWLETT PACKARD	
6966A 0-36 V variable 10 A metered	250
MARCONI	
TF2154/1 0-30V variable Metered	75
PHILIPS	
PE1646 0-75V variable 6A Metered V + I	495
<b>PULSE GENERATORS</b>	
ADVANCE	
PG57 10 Hz-50 MHz 10V 50Ω Vari RT 6 ns	190
EH RESEARCH	
132 10 Hz-3.5 MHz 50V 50Ω RT 10ns 2 pulse	120
MARCONI	
TF2025 0.2 Hz-25 MHz 10V 50Ω RT 7ns 2 pulse	350
<b>RECORDERS &amp; ACCESSORIES</b>	
BRUNO WOELKE	
ME102B Wow and Flutter meter	75
BRYANS SOUTHERN	
BS314 Chart 10" 4 Pen 16 speed	1950
BS316 Chart 10" 6 Pen 16 speed	2500
HEWLETT PACKARD	
7015A XY 1 pen A4 size	700
7046A XY 2 pen A3 size	995
MEDELEC	
M/SCOPE Combined 4 ch scope + UV rec/dr	1900
SE LABS	
994 6 ch galvo preamp + DC bridge supply	450
6008 UV chart 8" 25 ch 16 speed	950
6150/51 UV recorder 12 ch-inc 6 ch amps	1000

### THIS MONTH'S SPECIAL OFFERS

**PHILIPS PM 8251 CHART RECORDER**  
single pen writing on 10 inch chart paper. 12 chart speeds + 12 voltage input ranges from 3.5mV to 50V F.S.D. **£325**

**HEWLETT PACKARD 427A MULTI-FUNCTION METER**  
with linear and dB scale. DC Volts 100mV-1000V F.S.D. AC Volts 10mV-300V (10Hz-1MHz) OHMS 10Ω-10MΩ F.S.D. Battery operated **£135**


**PHILIPS PM 5129 FUNCTION GENERATOR**

# New Line of Wave Solderable Heat Sinks

Thermalloy International offers 35 different styles of wave solderable heat sinks for TO-3 and plastic packages. Styles include board mounted stampings and flat sided extrusions.

Solderable Stud™ Heat Sinks allow the heat sink/device to be preassembled and treated as a single component on your production line. It is dropped into plated-thru holes in the P.C. Board and wave soldered with other components. Eliminates hand soldering and extra inspections to reduce your production steps by 50%. All work can now be done from one side of the board, and less mounting hardware is required.

For product samples and full technical literature contact MCP Electronics.

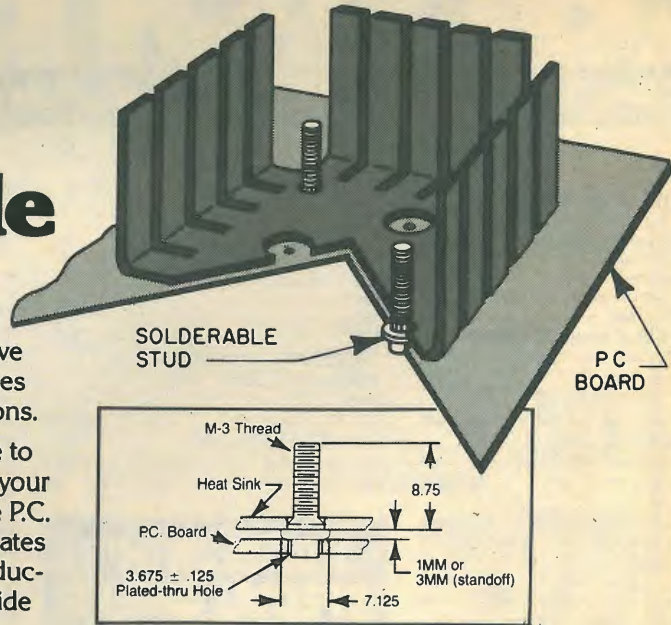

MCP Electronics Ltd.,  
38 Rosemont Road, Alperton, Wembley, Middlesex.  
Telephone 01-902 5941. Telex: 923455.



**Thermalloy International**  
Advanced technology in semiconductor accessories.

WW - 014 FOR FURTHER DETAILS

## The new CES micropad



The microphone for mobile radio, with DTMF signalling and optional ANI, brings greater system flexibility to your telecom network.

Interface  
Quartz  
Devices  
Limited


For further information contact the sole agents



29 Market Street  
Crewkerne  
Somerset TA18 7JU  
Crewkerne (0460) 74433  
Telex 46283 infac g

WW - 010 FOR FURTHER DETAILS

## METER PROBLEMS?

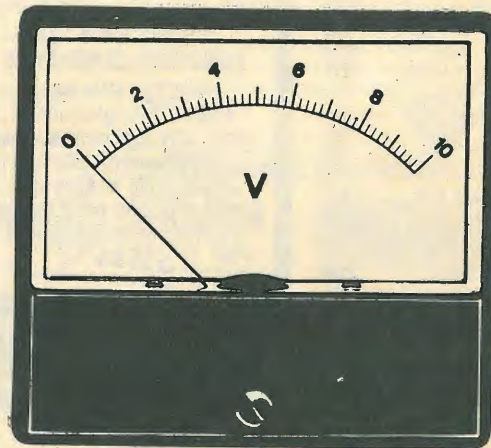

137 Standard Ranges in a variety of sizes and stylings available for 10-14 days delivery. Other Ranges and special scales can be made to order.

Full information from:

**HARRIS ELECTRONICS (London)**  
138 GRAYS INN ROAD, W.C.1 Phone: 01/837/7937

Telex: 892301 HARTRO G.

WW - 021 FOR FURTHER DETAILS



## EXPERIMENTOR BREADBOARDS

No soldering modular breadboards, simply plug components in and out of letter number identified nickel-silver contact holes. Start small and simply snap-lock boards together to build a breadboard of any size.

All EXP Breadboards have two bus-bars as an integral part of the board, if you need more than 2 buses simply snap on 4 more bus-bars with the aid of an EXP 4B.

**EXP 325 £1.60** The ideal breadboard for 1 chip circuits. Accepts 8, 14, 16 and up to 22 pin ICs. Has 130 contact points including two 10 point bus-bars.




**EXP 350 £3.15** Specially designed for working with up to 40 pin ICs perfect for 3 & 14 pin ICs. Has 270 contact points including two 20 point bus-bars.



**EXP 300 £5.75** The most widely bought bread-board in the UK. With 550 contact points, two 40 point bus-bars, the EXP 300 will accept any size IC and up to 6 x 14 pin DIPS. Use this breadboard with Adventures in Microelectronics.



**EXP 600 £6.30** Most MICROPROCESSOR projects in magazines and educational books are built on the EXP 600.



**EXP 650 £3.60** Has .6" centre spacing so is perfect for MICROPROCESSOR applications.



**EXP 4B £2.30** Four more bus-bars in "snap-on" unit.



The above prices are exclusive of P&P and 15% VAT.

**THE GSC 24 HOUR SERVICE TELEPHONE (0799) 21682**  
With your Access, American Express, Barclaycard number and your order will be in the post immediately  
**GLOBAL SPECIALTIES CORPORATION**



G.S.C. (UK) Ltd., Dept. 7TT  
Unit 1, Shire Hill Industrial Estate  
Saffron Walden, Essex CB11 3AQ  
Tel: Saffron Walden (0799) 21682  
Telex: 817477

# THREE FOR FREE FROM GSC

Available from selected stockists  
**ELECTRONICS BY NUMBERS**

Electronics by Numbers  
Projects No 10, No 11, No 12

## No. 10 SOIL MOISTURE TESTER

No more wilting houseplants with this soil moisture test. Just place the probes into the soil and it will light up to tell you whether the soil is "too wet" or "too dry". You don't even need green fingers.


## No. 11 DIGITAL ROULETTE

The suspense and excitement of the casino in your own home. Just press the button, the circle of lights go round and there is the sound of the roulette wheel as well, both gradually slowing down to reveal the winning number.

## No. 12 EGG TIMER

How do you like your eggs done, hard or soft, just set the timer and it will sound when the egg is done to your liking. Long battery life because it switches itself off automatically. So get cracking now!

Want to get started on building exciting projects, but don't know how? Now using EXPERIMENTOR BREADBOARDS and following the instructions in our FREE 'Electronics By Numbers' leaflets, ANYBODY can build electronic projects. For example, take one of our earlier projects, a L.E.D. Bar Graph;




You will need; One EXP 300 or EXP 350 breadboard 15 silicon diodes 6 resistors 6 Light Emitting Diodes  
Just look at the diagram, Select R1, plug it into the lettered and numbered holes on the EXPERIMENTOR BREADBOARD, do the same with all the other components, connect to the battery, and your project's finished. All you have to do is follow the large, clear layouts on the 'Electronics by Numbers' leaflets, and ANYBODY can build a perfect working project.

For full detailed instructions and layouts of Projects 10, 11 and 12, simply take the coupon to your nearest GSC stockist, or send direct to us, and you will receive the latest 'ELECTRONICS BY NUMBERS' leaflet.

If you have missed projects, 1, 2 and 3, or 4, 5 and 6, or 7, 8 and 9, please tick the appropriate box in the coupon.

## PROTO-BOARDS

The ultimate in breadboards for the minimum of cost. Two easily assembled kits.



PB6 Kit, 630 contacts, four 5-way binding posts accepts up to six 14-pin Dips.  
**PROTO-BOARD 6 KIT £9.20**



PB 100 Kit complete with 760 contacts accepts up to ten 14-pin Dips, with two binding posts and sturdy base. Large capacity with Kit economy.  
**PROTO-BOARD 100 KIT £11.80**

**IT'S EASY WITH G.S.C.**

**TO RECEIVE YOUR FREE COPY OF PROJECTS 10, 11 and 12**  
**Just clip the coupon**  
Give us your name and full postal address (in block capitals). Enclose cheque, postal order or credit card number and expiry date, indicating in the appropriate box(es) the breadboard(s) you require.

**For immediate action**  
The GSC 24 hour, 5 day a week service.  
Telephone (0799) 21682 and give us your Access, American Express or Barclaycard number and your order will be in the post immediately.

EXPERIMENTOR BREADBOARDS	CONTACT	IC CAPACITY 14 PIN DIP.	UNIT PRICE INC P&P & 15% VAT	Qty req.
EXP 325	130	1	£ 2.70	
EXP 350	270	3	£ 4.48	
EXP 300	550	6	£ 7.76	
EXP 600			£ 8.39	
EXP 650	270	use with 0.6 pitch Dip's Strip Bus-Bar	£ 5.00	
EXP 4B	Four 40 Point Bus-Bars		£ 3.50	

PROTO-BOARDS	CONTACTS	UNIT PRICE INC P&P & 15% VAT
PB6	630	£11.73
PB100	760	£14.72

NAME.....  
ADDRESS.....  
I enclose cheque/P.O. for £.....  
Debit my Barclaycard, Access, American Express card No.....  
Expiry date.....

If you missed project No's 1 to 9 tick box.   
For Free catalogue tick box

G.S.C. (UK) Ltd., Dept. 7TT, Unit 1, Shire Hill Estate, Saffron Walden, Essex, CB11 3AQ  
Tel: Saffron Walden (0799) 21682 - Telex: 817477


WW - 074 FOR FURTHER DETAILS

LONDON'S TEST EQUIPMENT CENTRES

AUDIO ELECTRONICS Retail • Mail Order • Industrial • Educational • Export


OPEN SIX DAYS A WEEK • CALL IN AND SEE FOR YOURSELF

ALL MODELS ON DISPLAY ALL PRICES INCLUDE VAT



TRIO OSCILLOSCOPES

Range of mains operated Scopes with 5" displays, triggered sweep (UK c/p £3.50)




DUAL TRACE CS1562A 10 MHz; 10 mV; 1 micro sec. £267.95 CS1560A 15 MHz; 10mV; 0.5 micro sec. £341.55 CS1566A 20 MHz; 5mV; 0.5 micro sec. £363.40 CS1577A 35 MHz; 2mV; 0.1 micro sec. £523.25 CS1830 Mk II 30MHz; 2mV; 0.2 micro sec. (fitted delay line) £626.75 CS1575 5 MHz; 1mV; 0.5 micro sec. Multi display Audio scope. £312.80




SINGLE TRACE CS1559A 10 MHz; 10mV; 1 micro sec; 5" display Triggered sweep (UK c/p £3.50) £251.85 C01303D 5 MHz; 10mV; low sweep for observation below 1 Hz and up to 450 MHz; 75mm display (UK c/p £2.00) £124.20 Optional probes - all models. X1 £8.50; X10 £10.50; X1-X10 £12.95; X100 £16.95

MULTIMETERS

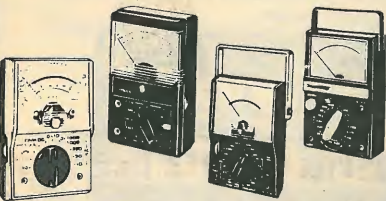

(UK c/p 65p or £1.00 for two) CHOOSE FROM UK'S LARGEST RANGE KRT101 10 range pocket 1K/Volt £4.50 KRT102 12 range pocket 1K/Volt £5.50 NH55 10 range pocket 2K/Volt £6.50 AT11 12 range pocket Deluxe 2K/Volt £7.75 ST5 11 range pocket 4K/Volt £8.50 NH56 22 range pocket 20K/Volt £11.95 YN360TR 19 range plus Hfe Test 20K/Volt £13.50 ST303TR 21 range plus Hfe Test 20K/Volt £15.95 KRT5001 16 range - range double 50K/Volt £16.50 AT1020 19 range Deluxe plus Hfe Test 20K/Volt £16.95 ETC5000 As KRT5001 plus colour scales 50K/Volt £17.95 7081 18 range - range double 10A DC 50K/Volt £20.85 TMK500 23 range. Plus 12A DC Plus Cont. Buzzer 30K/Volt £22.75 AT205 21 range Deluxe 10A DC 50K/Volt £25.75 C7080 26 range large scale 10A DC; 5KV AC/DC 20K/Volt £27.50 AT210 23 range Deluxe 12A AC/DC 100K/Volt £31.00 360TR 23 range Large scale 10A AC/DC Hfe Test 50Meg ohm; 1KV AC/DC 100K/Volt £34.95


CLAMP-ON-METERS INSULATION TESTERS




Multi-range clamps all with resistance range, carry case & leads. Also digital and DC clamp in stock (UK c/p 75p) ST300 300A 600V 9 ranges £25.95 ST310 300A 600V 9 ranges £29.95 K2602 150A; 600V; AC 7 ranges £35.95 \*K2606 300A; 600V; AC 8 ranges £44.00 K2803 300A; 600V; AC 9 ranges £53.95 K2903 900A; 750V; AC 9 ranges £77.50 K2103 1000A; 750V; AC 9 ranges £95.00 \*Optional temperature probe £13.80 ELECTRONIC INSULATION TESTERS Battery operated complete with carry case (UK c/p £1.00) YF500L 500V/100Meg; Plus 0-100 ohm £55.00 K3103 600V/100Meg; Plus 0-2.6k ohm £95.00 K3106 500V & 1000V; 1000 & 2000Meg £104.00 K4101 Earth resistance tester £136.50 M500 Hand cranked insulation tester 500V/100Meg; £67.50

THANDAR - SINCLAIR

Reliable low cost portable instruments, bench models all 25.5 x 15 x 5cm. Generators mains operated rest battery (supplied). UK c/p Hand models 65p, bench £1.15




DIGITAL MULTIMETERS (3 1/2 digit LCD) TM354 Hand held, DC 2A; 2m ohm; 1mV - 1000V DC; 500v AC. £45.94 TM352 Hand held, DC 10A; Hfe test; Continuity test £57.44 TM353 Bench, 2A AC/DC; 1000V AC/DC; 20M ohm. Typical 0.25% £96.60 TM351 Bench, 10A AC/DC; 1000V AC/DC; 20M ohm Typical 0.1% £113.85




FREQUENCY COUNTERS (8 Digit) PFM200 Hand held LED; 200 MHz; 10mV (600 MHz with TP600) £57.27 TF040 Bench LCD; 40 MHz; 40mV (400 MHz with TP600) £126.50 TF200 Bench LCD; 200 MHz; 10-30mV (600 MHz with TP600) £166.75 TP600 600 MHz + 10 Prescaler 10 mV £43.13



GENERATORS (All bench models) mains operated TG100 Function; 1 Hz-100 KHz; Sine/SQ/Triangle/TTL £90.85 TG102 Function; 0.2 Hz-2 MHz; Sine/SQ/Triangle/TTL £166.75 TG105 Pulse; 5 MHz-5 Hz (200ns-200ms) various outputs £97.75




OSCILLOSCOPE (Bench model low power portable) 10 MHz 2" trace; 10mV; 0.1 micro sec. All facilities. Model SC110 £159.85 (Rechargeable battery pack £8.63; AC adaptor/charger £5.69)




OPTIONAL ITEMS Carry case (bench only) £6.84 AC Adaptors (state model) £5.69

GROTECH OSCILLOSCOPES

Range of Portable Scopes mains and battery operated. Plus special features (UK c/p £3.00)




3030 Single trace 15 MHz; 5 mV; 0.5 micro secs. Plus built in component tester; 95mm tube £166.75 3131 Dual trace 15 MHz; trig to 35 MHz; 5mV; 0.5 micro sec; 130mm tube; plus component tester. £264.50 3034 Battery-mains dual trace 15 MHz; trig to 20 MHz; built in Nicads; 5mV; 0.5 micro secs. (Eliminator charger optional £28.75) £356.50



Also Available 3033; single trace 3034 3035; 130mm 3030 £293.25 3337; dual 30 MHz; 130mm £189.75 £408.25 (Optional Probes all models - see Trio above)

LOGIC PROBE



(UK c/p 45p) Leader LDP075 50 MHz; 10MEG ohm; 10n Sec; with carry case £56.90

DIRECT READ HV PROBE




(UK c/p 65p) 0/40KV; 20K Volt £18.40

OSCILLOSCOPE PROBE KITS


(UK c/p 50p per 1 to 3) Available BNC plug or Banana X1 £8.50; X10 £10.50; X1-X10 £12.95 Also X100 (BNC only) £16.95

TRIO GENERATORS

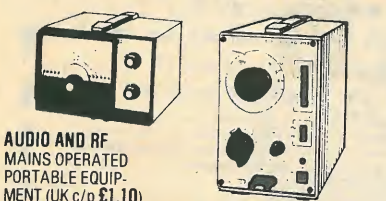

AUDIO AND RF MAINS OPERATED PORTABLE EQUIPMENT (UK c/p £1.10) SG402 6 range RF 100 KHz - 30 MHz ± 1.5; INT/EXT MOD; 100 mV o/p Variable £68.00 AG202A Matching 4 range Audio; 20 Hz - 200 KHz Sine Square; Distortion 0.5-1% Variable o/p to 10V £78.20 AG203 5 band 10 Hz - 1 MHz; Sine/Square; 0.5dB deviation; Distortion Max. 0.1% Switched Alternator & variable. £126.50 ALSO IN STOCK Newtronic 200P & 200SPC 0.002 Hz 5.5 MHz Generators (200 SPC with 100 MHz counter)

PROFESSIONAL MULTIMETERS

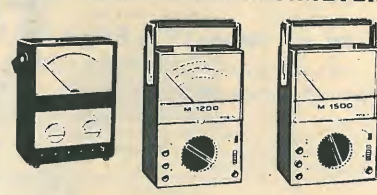

(UK c/p £1.50) All featuring AC/DC Volts/Current & Ohms ranges. M1500 43 range 20K/Volt; AC/DC 10A £53.50 M1200 30 range 100K/Volt; AC/DC 15A 200 Meg ohm. £67.50 K1400 26 range large scale 20K/Volt; 10A AC/DC; 20 Meg ohm; 5kV AC/DC £79.95 K200 39 range 10 Meg ohm input; 25 Hz-1 MHz £95.00 OPTIONS Cases: M 1500 & 1200 £16.50; K1400 £19.00 Temperature Probe for K1400 £13.80

THURBY DIGITAL MULTIMETER



4 1/2 Digit; 0.05% 7 Function LCD Made to exacting standards in UK 30 ranges; 1200V DC; 750V AC; 10A AC/DC; 32 Meg ohm. Also includes frequency measurement to 4 MHz and 4 KHz output. Price is with batteries, test leads and mains adaptor. (optional carry case £20.45) £171.00 UK c/p £1.00

CALLERS WILL ALWAYS FIND A RANGE OF LOW COST TEST EQUIPMENT, ACCESSORIES, TOOLS, IRONS AND BOARDS IN STOCK. ALSO SPECIAL OFFERS FOR CERTAIN EQUIPMENT WHICH WILL VARY FROM TIME TO TIME

PRICE CORRECT AT TIME OF PREPARATION E & OE. ALL PRICES INCLUDE VAT. CHOOSE FROM UK'S LARGEST RANGE

ALL PRICES INCLUDE VAT



AUDIO ELECTRONICS Cubegate Limited

301 EDGWARE ROAD, LONDON, W2 1BN, ENGLAND. TELEPHONE 01-724 3564 ALSO AT HENRYS RADIO, 404/406 EDGWARE ROAD, LONDON W2

OPEN SIX DAYS A WEEK • CALL IN AND SEE FOR YOURSELF

Order by Post with CHEQUES/ACCESS/VISA or Telephone your order

WW - 022 FOR FURTHER DETAILS

FREE CATALOGUE!


Send large SAE (20p UK) Schools, Companies, etc. free on request.

LONDON'S TEST EQUIPMENT CENTRES

AUDIO ELECTRONICS Retail • Mail Order • Industrial • Educational • Export

OPEN SIX DAYS A WEEK • CALL IN AND SEE FOR YOURSELF

ALL MODELS ON DISPLAY ALL PRICES INCLUDE VAT



LCD DIGITAL MULTIMETERS SPECIAL PURCHASE - LIMITED PERIOD ONLY

6220 Reliable 22 range hand held 3 1/2 digit LCD with volt/ohms auto range, unit and range signs. 10 amp AC/DC; battery warning; lower power ohms range. Model 6110 Also has range hold, continuity buzzer and improved accuracy. All models high quality rotary operation. Resolution 0.1 milli volt; 10-Micro amp; 0.1 ohm.

6220 1000v DC; 0.2/10A AC/DC; 600v AC; 2mega ohm. Was £55.95 NOW £42.95

6110 As above plus 20mA AC/DC and improved accuracy. Was £85.95 NOW £59.95

THIS SPECIAL OFFER IS QUALITY WITH VALUE

Also in stock: 6200 20/200mA version of 6220 (i.e. no 10 amp) £37.95 6100 0.2A version of 6110 (i.e. no 10 amp) £49.95 188m 16 range with Hfe checker £43.50 189m 30 range with Hfe checker £69.95

GLOBAL SPECIALISTS EQUIPMENT




Generators (UK c/p £1.00) 2001 1 Hz-100 KHz sweepable function generator. TTL/Sine/Square/Triangle. All facilities; Mains £89.00 4001 Ultra Variable Pulse Generator; 0.5 Hz-5 MHz Every facility; Mains. £109.00



Frequency Counters (UK c/p 80p) MAX100 100 MHz Counter. Battery operated. 8 Digit 30mV typical. Bench portable LED £89.00 MAX50 6 Digit 50 MHz Hand held LED £56.00 MAX550 2 range 6 Digit 550 MHz hand held LED £97.75 P5500 500 MHz prescaler for MAX50/100 £34.50



Circuit Powered Logic Probes Pulsers and Monitors (UK c/p 65p) LP1 DTL/TTL/CMOS; 10 MHz; 100K ohm; Pulse; Memory £35.50 LP2 DTL/TTL/CMOS; 1.5 MHz; 300K ohm; Pulse £19.95 LP3 DTL/TTL/CMOS; 50 MHz; 500K ohm; Pulse; Memory £55.95



LM1 All, 8, 10, 12, 14 & 16 Pin IC's. Indicates Pins on/off DTL/TTL/CMOS/HTL. Logic Monitor £33.00 DP1 Digital Pulse. Single shot or 100pps. £58.50

SABTRONICS EQUIPMENT

New reliable range of DMM's and frequency computers with those extra facilities and competitive prices. All battery operated (supplied). Except 5020A mains. Optional mains eliminators available. 8 DIGIT COUNTERS 0.1 Hz to 10 Hz Res. 10mV sensitivity to 100 MHz (UK c/p £1.00)

8110A 20 Hz-100 MHz in 2 ranges £95.45 8610A 20 Hz-600 MHz in 3 ranges £113.85

9 DIGIT COUNTERS 30mV sensitivity to 1 GHz. Resolution 0.1 Hz-10 Hz 8810B 10 Hz-600 MHz in 3 ranges; £125.35

8000B 10 Hz-1 GHz in 3 ranges £184.00 FUNCTION GENERATOR (UK c/p £1.00) with mains adaptor 5020A 1 Hz-200 KHz Sine/Square/Triangle/TTC Freq. sweep. Low distortion £98.90

DIGITAL MULTIMETERS Two LCD hand held - one with temperature range. Also LCD and LED Bench models. 2035A 3 1/2 digit LCD hand. 2A AC/DC 20Meg ohm ETC £95.45 2037A As 2035A with -50°C to +150°C Temp. range 0.1° resolution £109.25


2010A 3 1/2 Digit LED. Auto decimal & minus. 10A AC/DC; 20Meg ohm etc. £95.45 2015A LCD version of above. £109.25 c/p 2035/37A 65p; All others £1.00

Options Touch & hold Probe for DMM's £14.95 Battery eliminators (state model) £5.69

POWER SUPPLIES 13.8 volt. Output regulated mains operated (c/p £1.00) 3 to 5 amp £15.50 5 to 8 amp £17.95

VARIABLE REGULATED POWER SUPPLIES

Mains operated regulated single metre (UK c/p £1.50) 241 0/12-0/24V 1 amp £35.00 154 5-15 volt 3 amp £44.00 423 0/12-0/24V 3 amp £58.50

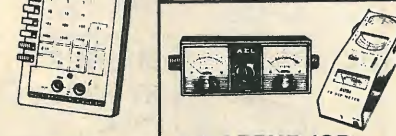

AMATEUR/CB KDM6 1.5 to 250 MHz Dip meter 6 ranges £38.50 SWR9 3-150 MHz SWR + F/S £9.50

SWR50 Twin meter SWR + Power 1KW max. £13.95 310 Single meter SWR + Power 10W £8.95 110 SWR/Power/F/S-10/100W £11.95

171 As 110 Twin meter £14.50 175 SWR/F/S/AE Match £13.80 176 As 175 + 0/5/50 Watt power £16.95 178 As 175 + 0/10/100W + MOD Scale £19.50

HM20 SWR meter Plus 20K/Volt 19 range Multimeter £28.95 (Note: SWR-Power ETC to 144/150 MHz)

Just a selection of a huge range in stock - send for latest lists including professional ranges.


DISCOUNTS Small and large quantity Discounts available for most products for UK and Export Your Enquiries Invited. ALSO STOCKED Range of chassis speakers and kits, microphones and public address equipment accessories etc.

HAMEG OSCILLOSCOPES

Range of top quality scopes for Amateur and Professional (UK c/p 307 £3.00, other £4.00)

307 Single trace 10 MHz; 5mV; 0.5 micro sec. Plus built in component tester. 6 x 7cm display. £158.70 (Optional carry case £18.40) 203 Dual 20 MHz; Trig to 30 MHz; 5mV; 0.5 micro secs; 8 x 10cm display (replace model 312) £253.00 412-5 Dual 20 MHz delayed sweep; trig to 40 MHz; 5mV; 0.1 micro sec. 8 x 10cm display. £402.50 512 Dual 50 MHz. Delayed sweep; Single sweep; Delay line; Trig to 70 MHz; 5mV; 0.1 micro sec. 8 x 10cm display £667.00

Options 203/412/512 Viewing hood £6.90 Component tester 203, 412, 512 £46.00 Carry case (state model) £21.85 Optional Probes (All models) X1 £8.50; X10 £10.50 X1-X10 £12.95; X100 £16.95



KEITHLEY PROFESSIONAL DIGITAL MULTIMETER

Model 130; 25 range. Easy to hold and use LCD DMM. Size 7 x 3.1 x 1.5



Ranges DC Volts 200mV-1000V 0.5% 100 micro volt AC Volts 200mV-750V 1% 100 micro volt DC current 2mA-10AMP 1-2% 1 micro amp AC current 2mA-10AMP 2% 1 micro amp Resistance 200 ohm-20 Meg 0.5% 0.1 ohm £102.35



SAFGAN PORTABLE OSCILLOSCOPES

Range of low cost Dual Trace Scopes mains operated. Made in UK to exacting standards. Available as 10 MHz; 15 MHz or 20 MHz. All feature 5mV sensitivity; 0.5 micro sec; 6.4 x 8cm display. (UK c/p £2.50)

07410 Dual 10 MHz £194.35 07415 Dual 14 MHz £201.25 07420 Dual 20 MHz £216.20



LASCAR BENCH MULTIMETER


3 1/2 Digit LCD Made in UK; 25 ranges with basic 0.1% accuracy; 2A AC/DC with 0.1. Microamp resolution; 1KV AC/DC 20Meg ohm ETC. LM100 £89.00 (UK c/p £1.00) Also model LM2001 hand held model 2Meg ohm. 2A AC/DC ETC. £57.70 (UK c/p 65p)




TV COLOUR BAR PATTERN GENERATORS

PAL UHF and VHF Models LGC393 VHF 6 pattern £143.75 LGC392u UHF 15 pattern £228.85 LGC392v VHF 15 pattern £231.15 LGC399 VHF/UHF 13 pattern £572.70

LEADER AUDIO RF FM TV GENERATORS



High quality mains operated equipment (UK c/p £1.50) LAG26 4 range 20 Hz-20 KHz. Sine/Square; 3V o/p; 0.05-0.8% Max Distortion Switched attenuator. £73.60 LAG120A 5 range 10 Hz-1 MHz. Sine/Square; 3V o/p; 0.05-0.8% Max Distortion Switched attenuator. £146.00 LAG125 Low distortion (0.02%) version of LAG120A Plus 'Burst' type signals for Speaker test £273.00



AUDIO LAG26 4 range 20 Hz-20 KHz. Sine/Square; 3V o/p; 0.05-0.8% Max Distortion Switched attenuator. £73.60 LAG120A 5 range 10 Hz-1 MHz. Sine/Square; 3V o/p; 0.05-0.8% Max Distortion Switched attenuator. £146.00 LAG125 Low distortion (0.02%) version of LAG120A Plus 'Burst' type signals for Speaker test £273.00

ALL PRICES INCLUDE VAT



AUDIO ELECTRONICS Cubegate Limited

301 EDGWARE ROAD, LONDON, W2 1BN, ENGLAND. TELEPHONE 01-724 3564 ALSO AT HENRYS RADIO, 404/406 EDGWARE ROAD, LONDON W2

OPEN SIX DAYS A WEEK • CALL IN AND SEE FOR YOURSELF

Order by Post with CHEQUES/ACCESS/VISA or Telephone your order

WW - 023 FOR FURTHER DETAILS

FREE CATALOGUE!

Send large SAE (20p UK) Schools, Companies, etc. free on request.

# The simple answer to all your power supply problems.



### Uninterruptible Power Supplies - UPS

250va to 2000va, 50 or 60hz

STANDBY POWER. Invaluable for winding down a computer programme on mains failure and wherever continuous power is essential.

STABILISATION.  $\pm 5\%$  Vital to combat mains fluctuations and ensure the operation of equipment at peak efficiency.

TRANSIENT ATTENUATION. Provides suppression of mains born interference (spikes).

An unbeatable power package from £395 ex works including maintenance free lead acid batteries. At Galatrek International, UPS are DOWN to unbeatable prices.

For more information, cut the coupon or contact Galatrek direct. Mr R Koffler, Galatrek International, Scotland Street, Llanrwst, nr Colwyn Bay, Gwynedd LL26 0AL, North Wales, Great Britain, Tel No: 0492-640311/641298 Night Service: 0492-30592 Telex: 617114 A/B Galahu



Please send full details of your range of voltage stabilisers, filters, cutouts UPS and generators.

Name \_\_\_\_\_

Address \_\_\_\_\_

Country \_\_\_\_\_

Telephone No \_\_\_\_\_

WW

WW - 028 FOR FURTHER DETAILS

# Audio power meter



### Wide range:

\* 30Hz to 30k Hz \* 10 $\mu$ W to 50W

\* 1.2 to 1000  $\Omega$  \* mains/battery


\* decibel scale - 18dBm to + 47dBm



**FARNELL INSTRUMENTS LIMITED**  
SANDBECK WAY - WETHERBY  
WEST YORKSHIRE LS22 4DH  
TELEPHONE (0937) 61961

WW - 009 FOR FURTHER DETAILS

ONLY £48.50 Post free, inc VAT



## LOW COST EPROM ERASURE

- HOLDS UP TO SIX EPROMS
- SAFETY INTERLOCKED TRAY
- FAST ERASE TIME
- QUALITY STEEL CASE
- MONEY-BACK GUARANTEE

Send cheque or official order for prompt delivery. Telephone orders will be despatched C.O.D. at no extra charge.  
Also available in London from: Technomatic Ltd. Transam and in Aberdeen from: Granite Chip.

**NORTHERN ELECTRONICS**  
51 Arundel Street, Mossley, Lancashire Tel: Mossley (04575) 4119  
WW - 052 FOR FURTHER DETAILS

## RADIATION DETECTORS

### BE PREPARED

- Ideal for the experimenter
- THIS DOSIMETER WILL AUTOMATICALLY DETECT GAMMA AND X-RAYS
- UNIT IS SIZE OF FOUNTAIN PEN & CLIPS ONTO TOP POCKET
- PRECISION INSTRUMENT
- MANUFACTURERS CURRENT PRICE OF A SIMILAR MODEL OVER £25 EACH

British design & manufacture  
Tested and fully guaranteed. Ex-stock delivery.

FREE RECHARGE SERVICE AFTER PURCHASE

**£6.95**

inc. VAT Post & Pack 60p

COMPLETE WITH DATA



01-723 1008/9

404 EDGWARE ROAD, LONDON W2 1ED

## 1000 SERIES OSCILLOSCOPES

# Telequipment 1000 Series The choice is yours

### Tried, Tested and now even better!

Since their introduction a few years ago, Telequipment's D1000 series of high performance low-cost oscilloscopes have established themselves at the forefront of the market. High performance because they are the result of intensive research and design efforts by one of the world's leading electronic instrument manufacturers, and low cost because of volume production in a modern automatic production plant.

**Performance to spare.**  
With the D1000 series, Telequipment regard specifications as lower

limits, not maxima. For example, the D1016A bandwidth is specified as 20MHz. The typical figure is actually in the region of 23 to 25MHz and the usable bandwidth nearer 35MHz.

Input attenuator tolerances are now specified at  $\pm 3\%$  for all D1000 series oscilloscopes, a considerable improvement over the previous  $\pm 5\%$ . But again, the user may well find the true figure closer to  $\pm 2\%$ .

### More Accurate Time Bases

The time bases, too, have been upgraded. All new D1000 instruments have been equipped with thermal compensation which

tightens time measurement accuracy to  $\pm 3\%$ , with improved stability as a bonus.

To match these improved time base specifications, trigger bandwidths and performance characteristics have been substantially enhanced.


### Better Display

The D1016A also has a new CRT. The size is just the same easy-to-view 10 x 8cm but with an internal graticule and a quick-heat cathode. It has a "GY" phosphor which is a near equivalent to the P31 but is more efficient optically at low beam currents and high writing speeds.

### A Choice of Bandwidth

10MHz or 20MHz with 5mV division sensitivity at full bandwidth and 1mV division at 5MHz in the D1016A, 4MHz in the D1011, and a choice of display modes; Algebraic Add, True X-Y, Channel 1 and 2 Chopped or Alternated, Channel 2 only, and Channel 2 Inverted.

**For further details send reply coupon today.**

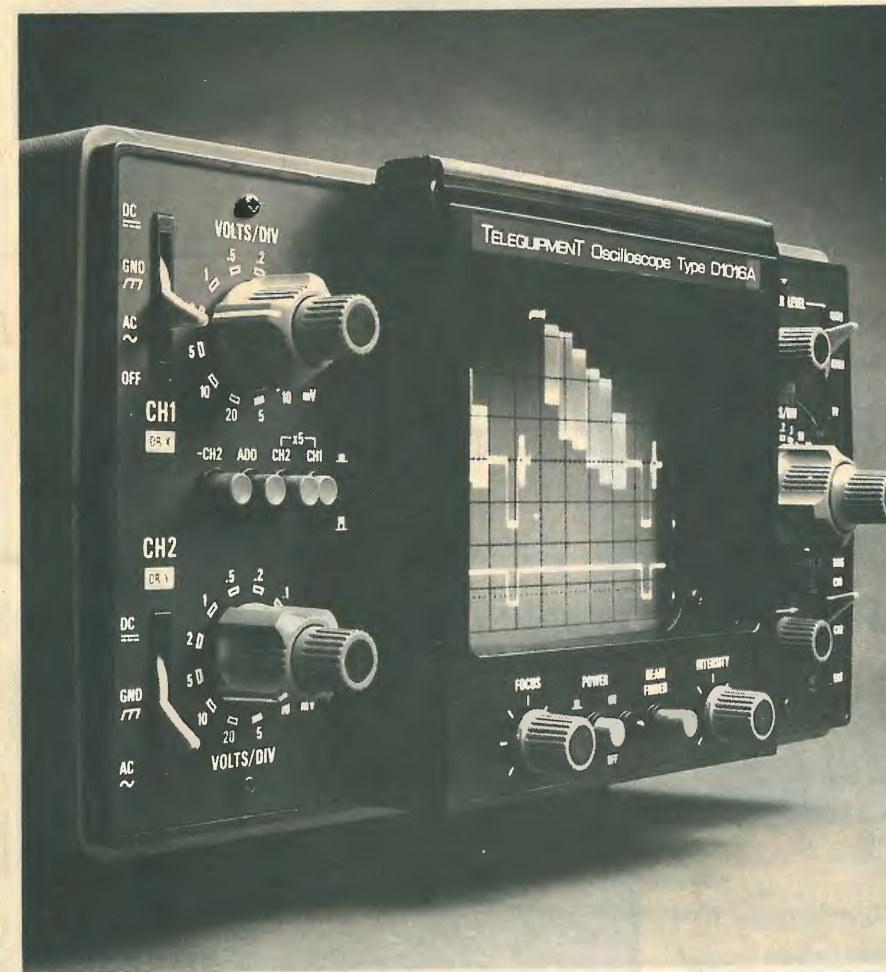

Please send details of the  
D1016A  D1010/D1011

Name \_\_\_\_\_

Position \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

Telephone \_\_\_\_\_

WW

**Tektronix U.K. Ltd.**  
P.O. Box 69,  
Harpenden, Herts AL5 4UP  
Telephone: Harpenden 63141  
Telex: 25559



Also available from Electroplan.


WW - 063 FOR FURTHER DETAILS

# CX80 COLOUR MATRIX PRINTER

£895 + V.A.T.

At last a low-cost Colour Matrix Printer for Text, Graphics, Histograms, Colour VDU Dumps, etc.

Colour printout is quickly assimilated, makes graphics more understandable and is an ideal medium for the presentation of complex data or concepts.

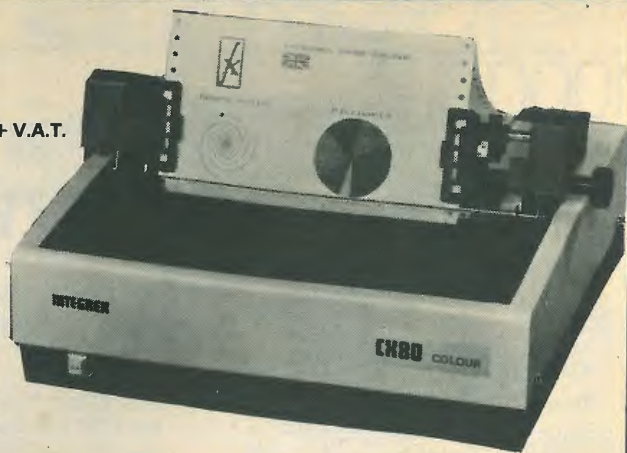

Compatible with most microprocessors, prints in 7 colours – sophisticated internal programme makes the CX80 easy to use.

Dot Addressable + 15 user programmable characters, 96 ASCII and 64 graphics characters in rom. Centronics interface with RS232 and IEEE488 options.

The CX80 is a product of our own design and development laboratories. It represents a British breakthrough in colour printer technology. Colour brochure on request. OEM pricing available.

# NRDC-AMBISONIC UHJ SURROUND SOUND DECODER



The first ever kit specially produced by Integrex for this British NRDC backed surround sound system which is the result of 7 years' research by the Ambisonic team. W.W. July, Aug., '77. The unit is designed to decode not only UHJ but virtually all other 'quadrophonic' systems (Not CD4), including the new BBC HJ. 10 input selections. The decoder is linear throughout and does not rely on listener fatiguing logic enhancement techniques. Both 2 or 2 input signals and 4 or 6 output signals are provided in this most versatile unit. Complete with mains power supply, wooden cabinet, panel, knobs, etc.

Complete kit, including licence fee £57.70 + VAT or ready built and tested £76.95 + VAT

# INTRUDER 1 Mk. 2 RADAR ALARM

With Home Office Type approval

The original 'Wireless World' published Intruder 1 has been re-designed by Integrex to incorporate several new features, along with improved performance. The kit is even easier to build. The internal audible alarm turns off after approximately 40 seconds and the unit re-arms. 240V ac mains or 12V battery operated. Disguised as a hard-backed book. Detection range up to 45 feet. Internal mains rated voltage free contacts for external bells etc.

Complete kit £52.50 plus VAT, or ready built and tested £68.50 plus VAT.

# Wireless World Dolby noise reducer

Trademark of Dolby Laboratories Inc.



Complete Kit PRICE: £49.95 + VAT (3 head model available)

Also available ready built and tested ..... Price £67.50 + VAT

Calibration tapes are available for open-reel use and for cassette (specify which) ..... Price £2.75 + VAT

**Typical performance**  
Noise reduction better than 9dB weighted.  
Clipping level 16.5dB above Dolby level (measured at 1% third harmonic content)  
Harmonic distortion 0.1% at Dolby level typically 0.05% over most of band, rising to a maximum of 0.12%  
Signal-to-noise ratio: 75dB (20Hz to 20kHz, signal at Dolby level) at monitor output  
Dynamic range > 90dB  
30mV sensitivity



Please send SAE for complete lists and specifications  
Portwood Industrial Estate, Church Gresley,  
Burton-on-Trent, Staffs DE11 9PT  
Burton-on-Trent (0283) 215432 Telex 377106


# INTEGREX LIMITED

All kits are carriage free




# Hilomast Ltd

## HILOMAST SYSTEMS

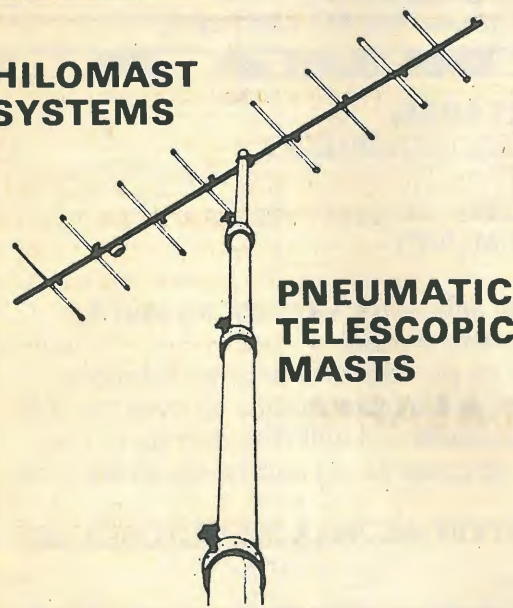

## PNEUMATIC TELESCOPIC MASTS

Pneumatic and winch-operated telescopic masts and towers. Vehicle, field and wall mountings available. Many standard models ex-stock.



## HILOMAST LIMITED

THE STREET HEYBRIDGE — MALDON  
ESSEX CM9 7NB ENGLAND  
Tel. MALDON (0621) 56480  
TELEX NO. 995855

WW - 020 FOR FURTHER DETAILS

# MICROCOMPUTER COMPONENTS

LOWEST PRICES - FASTEST DELIVERY

DEVICE	PRICE	DEVICE	PRICE	DEVICE	PRICE
<b>CPU's</b>		<b>REGULATORS</b>		74LS221	0.60
6502	4.95	7805	0.50	74LS240	0.89
6800	3.70	7812	0.50	74LS241	0.89
6802	5.11	7905	0.55	74LS242	0.79
6803	11.80	7912	0.55	74LS243	0.79
6809	11.95	<b>CRYSTALS</b>		74LS244	0.79
8085A	5.50	1 MHz	3.00	74LS245	0.89
Z80 CPU	4.00	1.8432 MHz	2.50	74LS247	1.34
Z80A CPU	4.82	2.4576 MHz	2.50	74LS248	1.00
		4 MHz	1.65	74LS249	0.68
<b>SUPPORT CHIPS</b>		<b>DIL SOCKETS</b>		74LS251	0.39
6520	3.15	8 pin	0.07	74LS253	0.39
6522	4.95	14 pin	0.09	74LS257	0.44
6532	7.95	16 pin	0.09	74LS258	0.38
6821	1.74	18 pin	0.15	74LS259	0.38
6840	4.20	20 pin	0.17	74LS261	1.90
68488P	9.11	22 pin	0.21	74LS266	0.23
6850	1.70	24 pin	0.23	74LS273	0.90
6862	6.91	28 pin	0.25	74LS279	0.34
6871A1T	18.70	40 pin	0.29	74LS283	0.44
6875L	4.18	<b>74LS SERIES</b>		74LS290	0.56
6880	1.07	74LS00	0.11	74LS293	0.45
6887	0.80	74LS01	0.11	74LS365	0.34
8212	1.70	74LS02	0.12	74LS366	0.34
8216	1.70	74LS03	0.12	74LS367	0.34
8224	2.45	74LS04	0.13	74LS368	0.34
8228	3.95	74LS05	0.13	74LS373	0.74
8251	3.95	74LS08	0.13	74LS374	0.74
8253	3.95	74LS09	0.13	74LS375	0.47
8255	3.90	74LS10	0.13	74LS377	0.89
AY-3-1015	3.45	74LS11	0.14	74LS378	0.69
AY-5-1013	3.45	74LS12	0.15	74LS386	0.28
AY-5-2376	6.95	74LS13	0.22	74LS390	0.59
MC1488	0.64	74LS14	0.44	74LS393	0.59
MC1489	0.64	74LS15	0.13	<b>CMOS 4000 'B' SERIES</b>	
MC1441	6.94	74LS16	0.13	4000	0.12
MC1442	7.99	74LS17	0.12	4001	0.13
RO-3-2513L	7.70	74LS18	0.14	4002	0.13
RO-3-2513U	7.70	74LS19	0.14	4006	0.60
Z80 CTC	4.00	74LS20	0.18	4007	0.17
Z80A CTC	4.00	74LS21	0.14	4008	0.55
Z80 DMA	11.52	74LS22	0.14	4009	0.28
Z80A DMA	9.99	74LS26	0.18	4010	0.28
Z80 DART	7.18	74LS27	0.14	4011	0.14
Z80A DART	7.18	74LS28	0.19	4012	0.17
Z80 P10	3.78	74LS29	0.16	4013	0.33
Z80 P10	3.78	74LS30	0.16	4014	0.58
Z80 S10-0	13.95	74LS31	0.16	4015	0.58
Z80 S10-1	13.95	74LS32	0.16	4016	0.28
Z80 S10-2	13.95	74LS33	0.16	4017	0.45
Z80A S10-0	13.95	74LS34	0.16	4018	0.58
Z80A S10-1	13.95	74LS35	0.16	4019	0.29
Z80A S10-2	13.95	74LS36	0.16	4020	0.58
		74LS37	0.15	4021	0.60
<b>CRT CONTROLLERS</b>		74LS38	0.15	4022	0.62
9364AP	5.94	74LS39	0.20	4023	0.17
9365	62.90	74LS40	0.17	4024	0.38
9366	62.90	74LS41	0.17	4025	0.16
6845	9.50	74LS42	0.28	4026	0.99
		74LS43	0.20	4027	0.30
<b>DATA CONVERTERS</b>		74LS44	0.24	4028	0.55
ZN425E	3.50	74LS45	0.70	4031	1.65
ZN426E	3.00	74LS46	0.18	4033	1.60
ZN427E	6.28	74LS47	0.30	4035	0.72
ZN428E	4.78	74LS48	0.80	4040	0.57
ZN429E	2.10	74LS49	0.35	4041	0.69
ZN432	28.09	74LS50	0.34	4042	0.54
ZN433	22.59	74LS51	0.44	4043	0.59
ZN440	56.63	74LS52	0.25	4044	0.64
ZN450E	7.61	74LS53	0.25	4045	1.65
		74LS54	0.25	4046	0.68
Data converter		74LS55	0.25	4047	0.68
Handbook	1.00	74LS56	0.39	4048	0.54
Data converter		74LS57	0.55	4049	0.30
Kit	29.95	74LS58	1.00	4050	0.30
		74LS59	0.28	4051	0.59
<b>BUFFERS</b>		74LS60	0.28	4052	0.68
81LS95	0.90	74LS61	0.45	4053	0.59
81LS96	0.90	74LS62	0.28	4054	1.20
81LS97	0.90	74LS63	0.34	4055	0.89
81LS98	0.90	74LS64	0.37	4060	0.95
8T26A	1.50	74LS65	0.90	4066	0.34
8T28A	1.50	74LS66	0.34	4068	0.17
8T95N	1.50	74LS67	0.35	4069	0.17
8T97N	1.50	74LS68	0.39	4070	0.19
8T98	1.50	74LS69	0.34	4071	0.19
		74LS70	0.36	4072	0.19
		74LS71	0.39	4073	0.19
		74LS72	0.39	4075	0.17
		74LS73	0.39	4076	0.60
		74LS74	0.39	4077	0.22
		74LS75	0.39	4078	0.24
		74LS76	0.47	4081	0.14
		74LS77	0.99	4082	0.19
		74LS78	0.84	4085	0.63
		74LS79	0.70	4086	0.69
		74LS80	0.54	4093	0.39
		74LS81	0.54	4502	0.23
		74LS82	1.30	4507	0.39
		74LS83	0.55	4507	1.90
		74LS84	0.55	4508	0.60
		74LS85	0.69	4510	0.60
		74LS86	0.59	4511	0.49
		74LS87	0.59	4512	0.60
		74LS88	0.39	4514	1.49
		74LS89	0.39	4515	1.49
		74LS90	0.58	4516	0.75
		74LS91	0.65	4518	0.40
		74LS92			
		74LS93			
		74LS94			
		74LS95			
		74LS96			
		74LS97			

OFFICIAL ORDERS WELCOME

## MIDWICH COMPUTER CO. LTD.

HEWITT HOUSE, NORTHGATE STREET  
BURY ST. EDMUNDS, SUFFOLK IP33 1HQ  
TELEPHONE: (0284) 701321

QUANTITY DISCOUNTS AVAILABLE

All prices exclude post and packing (50p on orders under £10) and VAT. ALL ORDERS DESPATCHED ON DAY OF RECEIPT WITH FULL REFUND FOR OUT OF STOCK ITEMS IF REQUESTED

CREDIT CARD ORDERS WELCOME (ACCESS AND VISA) 24 HOUR TELEPHONE SERVICE

WW - 018 FOR FURTHER DETAILS

# Jackson Music presents

# SALE OF THE NEXT CENTURY

At the Sentry Box, The Production Village  
100, Cricklewood Lane, London NW2.  
(Off Finchley Road—3½ miles from the West End—Easy Parking)

- A MAMMOTH 3-DAY SALE:**
- \* RECORDING STUDIO EQUIPMENT
  - \* FILM EQUIPMENT
  - \* VIDEO EQUIPMENT
  - \* MUSICAL INSTRUMENTS

When we announced the last Sale of the Century, we said it couldn't happen again. Well, we were wrong!

By great public demand, we've put together another fabulous collection of top quality used equipment from studios all over the U.K. The Production Village in Cricklewood will reverberate to the sounds of the Bargain Basement, so come along and re-equip with the best there is.

**THE SALE IS A 3-DAY EVENT ON 14th, 15th & 16th OCTOBER 1981, 10 a.m.—6 p.m. DAILY.**

**Nearest Stations:**  
Golders Green (Northern) Buses 245 & 260  
Kilburn (Jubilee) Buses 16, 16a & 32  
Willesden Green (Jubilee) Buses 260 & 266.

For full details and payment terms, drop us a line to:  
Jackson Music Group, The Studios, Rickmansworth,  
Herts, England. Telephone 09237 72351 Telex 262284  
Ambsdr. G.




# WILMSLOW AUDIO

The firm for Speakers

EVERYTHING IN STOCK FOR THE SPEAKER CONSTRUCTOR!

BAF, LONG FIBRE WOOL, FOAM, CROSSOVERS, FELT PANELS, COMPONENTS, SPEAKER STANDS, & BRACKETS, ETC. LARGE SELECTION OF GRILLE FABRICS.

(Send 30p in stamps for fabric samples)



### HI-FI DRIVE UNITS



### PA GROUP & DISCO UNITS



### WILMSLOW AUDIO



### SPEAKER KITS

AUDAX HD12.9D25	£8.75
AUDAX HD100D25	£8.75
AUDAX HD1P25EBC	£7.50
AUDAX HD20825H4	£14.95
AUDAX HD13D34H	£12.95
AUDAX HD24545C	£21.95
AUDAX WFR15S	£23.95
COLES 4001	£7.65
COLES 3000	£7.65
COLES 3100	£7.95
COLES CE2000 6½"	£14.95
CELESTION HF1 300 II	£13.60
CELESTION HF2000	£8.95
DALESFORD D10 ferrofluid	£11.95
DALESFORD D30/110	£12.95
DALESFORD D50/153	£12.95
DALESFORD D50/153 polymer	£15.25
DALESFORD D50/200	£12.95
DALESFORD D50/200 polymer	£15.25
DALESFORD D100/250	£29.95
DALESFORD D300	£35.75
DECCA London Horn	£89.95
ISOPHON KK8/8	£8.25
ISOPHON KK10/8	£8.75
JORDAN 50mm unit	£31.50
JORDAN Crossover pair	£31.90
JORDAN WATTS Module Mk III	£28.50
JORDAN WATTS HF kit	£10.50
KEF T27	£9.45
KEF B110	£12.25
KEF B200	£13.50
KEF B139	£27.75
KEF B139S	£9.95
KEF DN12	£7.75
KEF DN13 SP1 106	£6.95
KEF DN13 SP1017	£6.95
LOWTHER PM6	£63.00
LOWTHER PM6 Mk I	£67.75
LOWTHER PM7	£99.00
PEERLESS KO10DT	£11.50
PEERLESS DT10HFC	£10.95
PEERLESS KO40MRF	£14.75
RICHARD ALLAN CG8T	£14.25
RICHARD ALLAN CG12T Super	£30.95
RICHARD ALLAN HP12B	£35.75
RICHARD ALLAN DT20	£10.75
RICHARD ALLAN DT30	£11.50
SEAS H107	£8.95
SEAS H211 ferrofluid	£10.95
SHACKMAN ES units	£136 pair
SHACKMAN ES units with cabs.	£170 pair
TANNOY DC386	£199.00
TANNOY DC316	£159.00
TANNOY DC296	£118.00
VOLT B250	£58.00
VOLT 10" ABR	£32.00
VOLT B220	£49.00
VOLT 8" ABR	£25.00

PA Group Disco units	£19.50
CELESTION G12/50TC	£24.50
CELESTION G12/80CE	£24.50
CELESTION G15/100CE	£37.95
CELESTION G15/100TC	£38.50
CELESTION G18/200	£64.75
CELESTION G18/250	£81.75
FANE CLASSIC 10/100	£17.50
FANE CLASSIC 12/50	£15.75
FANE CLASSIC 12/100	£21.75
FANE CLASSIC 15/100	£29.75
FANE CLASSIC 15/150	£38.50
FANE CLASSIC 15/200	£44.00
FANE CLASSIC 18/200	£47.95
FANE CLASSIC 18/250	£51.75
FANE DISCO 100/2	£28.75
FANE GUITAR 100L	£26.75
FANE GUITAR 100B	£27.50
FANE PA 100	£26.75
FANE BASS 100	£39.00
FANE STUDIO 12L, 12B	£45.00
GAUSS 12" models	£146.00
GAUSS 15" models	£162.00
GAUSS 18" models	£220.00
GOODMANS PP12	£22.50
GOODMANS DI12	£25.50
GOODMANS GR12	£24.95
GOODMANS HIFAX 50HX	£21.85
GOODMANS HIFAX 100HX	£24.50
McKENZIE C12/100GP	£24.45
McKENZIE C12/100TC	£24.45
McKENZIE C12/100 bass	£24.45
McKENZIE C12/125GP	£39.95
McKENZIE C12/125TC	£39.95
McKENZIE C12/200	£54.25
McKENZIE GP15	£35.10
McKENZIE TC15	£35.10
McKENZIE C15 bass	£59.60
McKENZIE C15/200	£63.25
McKENZIE C10/100	£22.50
MOTOROLA PIEZO HORN 3½"	£4.50
MOTOROLA PIEZO HORN 2" x 6"	£8.75
RCF L12P24	£63.50
RCF L12P11C	£62.75
RCF L15P03	£66.95
RCF L15P/100A	£85.50
RCF L15P/06C	£87.75
RCF TW101	£39.95
RCF TW25	£21.95
RCF TW105	£18.75
RCF H2010 flare	£8.75
RCF H4823 flare	£32.50
RICHARD ALLAN HD8, HD8T	£21.25
RICHARD ALLAN HD10, HD10T	£22.95
RICHARD ALLAN HD12P	£31.25
RICHARD ALLAN HD12 super	£41.75
RICHARD ALLAN HD15	£55.25
RICHARD ALLAN Atlas	£99.75

**KITS FOR MAGAZINE DESIGNS, etc**  
Kits include drive units, crossovers, BAF/long fibre wool, etc, for a pair of speakers  
Carriage £3.95 unless otherwise stated  
Prices per pair

Everyday Electronics EE70	£144.00
Everyday Electronics EE20	£29.95
Hi Fi Answers Monitor	£148.00
Hi Fi for Pleasure Compact Monitor	£116.00
Hi Fi for Pleasure ECM inc. foam, felt panels etc	£77.50
Hi Fi News State of the Art	£205.00
Hi Fi News Midline	£119.75
Hi Fi News Miniline	£49.00
Hi Fi News Tabor with J4 bass units	£69.00
Hi Fi News Tabor with H4 bass units	£73.50
Popular Hi Fi Boxer	£299.00
Popular Hi Fi Boxer cabinets, pair	£109.00
Popular Hi Fi Jordan System 1	£120.00
Popular Hi Fi Mini Monitor	£84.00
Practical Hi Fi PRO9TL inc. felt panels and level controls	£156.75
Practical Hi Fi BSC3	£68.00
Wireless World T.L. KEF units	£125.00

Flat-pack cabinet kits are available for LS3 micromonitor, BSC3, HFP compact monitor, EE20, EE70, Wharfedale E50, E70, E90 (also E90 in Pro disco style).

Wilmslow Audio BA1 sub bass amplifier/crossover kit £37.95 plus £1 carriage.

All prices include VAT at 15% and are correct at 1.6.81.

### CARRIAGE & INSURANCE

Tweeters/Crossovers 70p each

Speakers	90p each
4" to 6½"	£1.10 each
8" to 10"	£2.00 each
12", 13" x 8", 14" x 9"	£3.00 each
15"	£5.00 each
Speaker Kits	£3.95 pair
Mag. Design Kits	£3.95 pair unless otherwise stated

Building speakers is easy with the new WILMSLOW AUDIO FLAT PACK CABINET KITS!

ALL PRICES INCLUDE VAT @ 15% and are correct at 1/7/81

Send 50p for our 80 page catalogue — (or price list only free of charge) packed with pictures and specifications of speakers, kits, cabinets, crossovers, mics, amps, mixers, grilles, effects etc. Export catalogue £1 or \$3 US.

Tel: 0625 529599 for speaker drive units, kits, PA equipment, mail order enquiries, and all export enquiries.

Tel: 0625 526213 for Hi-Fi equipment and complete speaker enquiries.

Lightning service on telephoned credit card orders!



35/39 Church Street  
Wilmslow, Cheshire

WILMSLOW AUDIO WE50. Total kit — Wharfedale E50 kit plus WE50 flat-pack cabinet kit including reflex port trims, acoustic wadding grille fabric, nuts, bolts, terminals etc £182 pair. Carriage £8.

WILMSLOW AUDIO WE70. Total kit as above but with E7 £220 pair. Carriage £8  
WILMSLOW AUDIO WE90. Total kit as above but with E90 £330 pair. Carriage £10  
WILMSLOW AUDIO WE90. Total kit — Wharfedale E90 kit plus WE90 flat-pack cabinet kit including reflex port trims, acoustic wadding grille fabric, heavy duty handles, castors with brakes, protective corners, black vynide cabinet covering, input panels, protective fuses, nuts, bolts etc. An ideal high quality disco speaker for amplifiers up to 150 watts (disco) or 200 watts (domestic Hi Fi) £187 each. Carriage £8. Or £369 pair. Carriage £10.

## SOUND INVESTMENT



Replacement tape heads from Monolith could mean a big improvement in sound quality from your tape recorder. A full catalogue is available, price 50p, which features a wide range of heads for cassette and reel to reel machines, as well as replacement motors, tape transports, etc.

Universal cassette heads to EIAJ standard, hole centres 17mm apart, 12mm from head face:

B12-02	Mono record/playback	£ 4.62
B24-01	Stereo playback	£ 4.62
B24-02	Stereo r/p	£ 7.66
B24-07	Stereo r/p for Dolby systems	£ 9.05
C42RPH20	Stereo r/p sendust head, suitable for chrome & metal tapes	£10.67
C42RPH04	Stereo r/p glass ferrite, the ultimate long life, high performance head	£13.34
C42RPS18	Stereo twin gap r/p long life head for record monitoring	£28.99
C21ES18	Mono/Stereo erase head	£ 2.13
C44RPH03	Four channel/track r/p	£15.15
C22ES04	Twin half track erase	£ 5.43


Ex stock deliveries, all prices include VAT. Post and packing 40p.

# MONOLITH

electronic products

The Monolith Electronics Co. Ltd., 5/7 Church Street, Crewkerne, Somerset TA18 7HR. Tel: 0460 74321. Telex: 46306 MONLTH G.

# Dielectric Communications

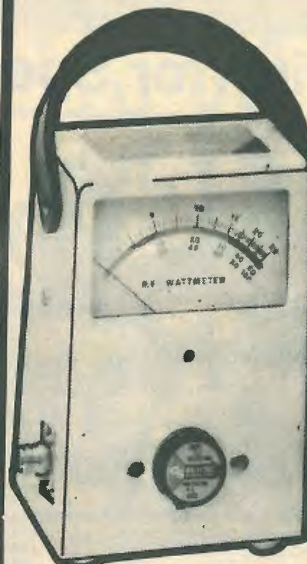

**Model 1000-A Wattmeter**  
MEASURES R.F. POWER IN 50 OHM CO-AX CABLES AND TRANSMISSION LINES, 1 to 5000 watts FROM 2MHz to 1000MHz DEPENDANT ON PLUG-IN.

For more information on these and other RF products: -

LOADS-COUPPLERS & SWITCHES

contact

# tce

**Tony Chapman Electronics Limited**

80a, High Street, Epping, Essex CM16 4AE  
Telephone: Epping (STD 0378) 76138 - 9 Cable: Chaptron, Epping Telex: 817363

WW - 041 FOR FURTHER DETAILS



*flexible*

The SSG520 10 to 520MHz synthesized signal generator is flexible enough to meet your need

**REMOTE PROGRAMMING**  
This option simplifies remote control of all major functions

**IEEE488 INTERFACE**  
Add-on module for low cost microcomputer controlled A.T.E. Switching module and other IEEE488 accessories available

**TRANSMITTER TESTING**  
Compatible with TTS520 transmitter test set for complete testing of base stations, mobile or fixed radios up to 100 watts rating, pocketphones, pagers, etc.

Send for our comprehensive folder of r.f. test equipment NOW!



# Farnell

FARNELL INSTRUMENTS LIMITED  
SANDBECK WAY · WETHERBY  
WEST YORKSHIRE LS22 4DH  
TEL. (0937) 61961 · TELEX 557294  
OR HARPENDEN · TEL. (05827) 69071

WW - 008 FOR FURTHER DETAILS

# Cotswold Electronics

## Toroidal Power Transformers

Budget range for the amateur and professional



Type	VA	Secondary		Dimensions		Weight Kg	Price
		Volts RMS	Current RMS	Dia.	Height		
C1000	30	6+6	2.50	70mm	30mm	0.45	
C1001	30	9+9	1.67	70mm	30mm	0.45	£4.55
C1002	30	12+12	1.25	70mm	30mm	0.45	
C1003	30	15+15	1.00	70mm	30mm	0.45	+£1.10 p.p.
C1004	30	18+18	0.83	70mm	30mm	0.45	+ 0.84 VAT
C1005	30	22+22	0.68	70mm	30mm	0.45	
C1006	30	25+25	0.60	70mm	30mm	0.45	
C1007	30	30+30	0.50	70mm	30mm	0.45	

C1010	60	9+9	3.33	87mm	33mm	0.75	
C1011	60	12+12	2.50	87mm	33mm	0.75	£4.96
C1012	60	15+15	2.00	87mm	33mm	0.75	
C1013	60	18+18	1.67	87mm	33mm	0.75	+£1.43 p.p.
C1014	60	22+22	1.36	87mm	33mm	0.75	+ 0.94 VAT
C1015	60	25+25	1.20	87mm	33mm	0.75	
C1016	60	30+30	1.00	87mm	33mm	0.75	
C1017	60	110	0.55	87mm	33mm	0.75	
C1018	60	220	0.27	87mm	33mm	0.75	
C1019	60	240	0.25	87mm	33mm	0.75	

C1020	100	12+12	4.17	88mm	40mm	1.00	
C1021	100	15+15	3.33	88mm	40mm	1.00	£5.70
C1022	100	18+18	2.78	88mm	40mm	1.00	
C1023	100	22+22	2.27	88mm	40mm	1.00	+£1.43 p.p.
C1024	100	25+25	2.00	88mm	40mm	1.00	+ £1.07 VAT
C1025	100	30+30	1.67	88mm	40mm	1.00	
C1026	100	110	0.91	88mm	40mm	1.00	
C1027	100	220	0.45	88mm	40mm	1.00	
C1028	100	240	0.42	88mm	40mm	1.00	

NOTE: All types normally supplied with 240 V primary 110 V, 220 V or other voltage supplied on request.

24 hour answering service: You may telephone your order throughout 24 hours quoting your Access or Barclaycard number. Phone number 0242-41313.

Type	VA	Secondary		Dimensions		Weight Kg	Price
		Volts RMS	Current RMS	Dia.	Height		
C1030	180	18-18	4.44	108mm	42mm	1.5	
C1031	180	22+22	3.64	108mm	42mm	1.5	£8.40
C1032	180	25+25	3.20	108mm	42mm	1.5	
C1033	180	30+30	2.67	108mm	42mm	1.5	+£1.73 p.p.
C1034	180	35+35	2.29	108mm	42mm	1.5	+ £1.52 VAT
C1035	180	110	1.46	108mm	42mm	1.5	
C1036	180	220	0.73	108mm	42mm	1.5	
C1037	180	240	0.67	108mm	42mm	1.5	

C1040	230	25+25	4.60	115mm	50mm	2.2	
C1041	230	30+30	3.83	115mm	50mm	2.2	£10.20
C1042	230	35+35	3.29	115mm	50mm	2.2	
C1043	230	40+40	2.88	115mm	50mm	2.2	+£1.73 p.p.
C1044	230	110	2.09	115mm	50mm	2.2	+ £1.79 VAT
C1045	230	220	1.05	115mm	50mm	2.2	
C1046	230	240	0.96	115mm	50mm	2.2	

C1050	330	25+25	6.60	130mm	52mm	2.8	
C1051	330	30+30	5.50	130mm	52mm	2.8	£11.90
C1052	330	35+35	4.71	130mm	52mm	2.8	
C1053	330	40+40	4.13	130mm	52mm	2.8	+£1.90 p.p.
C1054	330	45+45	3.67	130mm	52mm	2.8	+ £2.07 VAT
C1055	330	110	3.00	130mm	52mm	2.8	
C1056	330	220	1.50	130mm	52mm	2.8	
C1057	330	240	1.38	130mm	52mm	2.8	

C1060	530	30+30	8.83	145mm	60mm	3.8	
C1061	530	35+35	7.57	145mm	60mm	3.8	£15.80
C1062	530	40+40	6.63	145mm	60mm	3.8	
C1063	530	45+45	5.89	145mm	60mm	3.8	+£2.05 p.p.
C1064	530	50+50	5.30	145mm	60mm	3.8	+ £2.66 VAT
C1065	530	110	4.82	145mm	60mm	3.8	
C1066	530	220	2.41	145mm	60mm	3.8	
C1067	530	240	2.21	145mm	60mm	3.8	

Cotswold Electronics Ltd Cheltenham GL51 9NX

Type	Mains Voltage	Secondary Volts	VA	Qty

FREEPOST(UK) only: We pay postage on all enquiries and orders. Address your envelope: Dept W Cotswold Electronics Ltd, FREEPOST, Cheltenham Glos. GL51 1BR (No stamp required)

enclose Cheque  P.O.  Money Order

Access/Barclaycard No.

Name

Address

Postal Code

Telephone No.

WW - 064 FOR FURTHER DETAILS



**The World of Radio & Electronics**  
 SUMMER 1981  
 60p  
 ALL 41 VOUCHERS INSIDE  
 AMBIT INTERNATIONAL  
 The most comprehensive 'stock' component catalogue yet. Everything from Z8001s and 32K EPROMs, to 1GHz DBMs, crystals, crystal filters, coils, displays, hardware etc.

**CONCISE PARTS CATALOGUE**

Three £1.00 Vouchers inside

WW - 070 FOR FURTHER DETAILS

# OUT NOW!

## AMBIT'S NEW CATALOGUE

In an attempt to collate and organize our burgeoning ranges of 'stock' components (now over 7000 line items), we have at last produced a 'concise' 80 page parts catalogue to supplement the popular 'Tecknowledgey' series of 'wordy' applications catalogues, which now lists a wide range of basic components - as well as our unique RF and Communications components. The *World of Radio and Electronics* contains everything the informed electronics user needs, at prices which we guarantee will match the lowest on the market for equivalent product.

Prices appear on the page alongside the part numbers, and the catalogue is now updated quarterly - available either direct from here (60p all inc) or at most newsagents and bookstalls where you can find electronics publications. So as well as all the 'run-of-mill' items like resistors, capacitors, hardware, solder etc - you now have the first genuinely complete parts source for the radio, communication, electronics, computer user.

**Ambit International**  
 200, North Service Road,  
 Brentwood,  
 Essex CM14 4SG

# ABACUS ARTA 600

Use the **ARTA 600** third-octave audio analyser adaptor and an oscilloscope to display the real-time intensity and spectral distribution of sounds. The internal pink noise generator enables the electrical or electro-acoustic frequency response of systems to be accurately and rapidly determined.

**£595 plus VAT**

Abacus Electronics 10 Barley Mow Passage, London W4 4PH England  
 Telephone: London 01-994 6477 Telex 8811418

WW - 067 FOR FURTHER DETAILS

### METALFILM RESISTORS

1% Tolerance, 1/4 Watt

100R	1k	10k	100k
110R	1k1	11k	110k
120R	1k2	12k	120k
130R	1k3	13k	130k
150R	1k5	15k	150k
160R	1k6	16k	160k
180R	1k8	18k	180k
200R	2k	20k	200k
220R	2k2	22k	220k
240R	2k4	24k	240k
270R	2k7	27k	270k
300R	3k	30k	—
330R	3k3	33k	330k
360R	3k6	36k	—
390R	3k9	39k	—
430R	4k3	43k	—
470R	4k7	47k	470k
510R	5k1	51k	—
560R	5k6	56k	560k
620R	6k2	62k	—
680R	6k8	68k	680k
750R	7k5	75k	—
820R	8k2	82k	820k
910R	9k1	91k	1M

**ONLY 3p EACH**  
 Minimum order £10  
 Minimum 5 pcs per value  
 89 Values (E24)

Special Offer: 5 PCS OF EACH (445 RESISTORS) ONLY **£11.50**.  
 High Quality High Stability, Huge Strength.  
 VAT inclusive. Add £1.00 p&p all areas.

**ORION SCIENTIFIC PRODUCTS LTD.**  
 4 Golden Square, London, W.1

WW - 032 FOR FURTHER DETAILS

## Britain's No.1 magazine for the radio enthusiast

From the June issue, Practical Wireless becomes an "all radio" magazine, covering all the techniques and applications of radio, including licensed amateur radio, short-wave listening, DX (long-distance) broadcast listening and viewing, radio control, etc., plus the latest developments on the CB scene.

# Practical Wireless

# LCD DIGITAL MULTIMETERS

ALL PRICES INCLUDE VAT

**WHILE STOCKS LAST!**

## MODEL 6110

3 1/2 Digit LCD featuring 23 ranges with volts/ohms autorange, unit and sign indicators, 10 amp AC/DC, battery warning, low power ohms ranges. Range hold and continuity buzzer. Fuse protected. Resolution 0.1mV DC, 1mV AC, 10 microamp, 0.1ohms. Supplied with battery and leads. Fitted top quality rotary switch.

Was £85.95 as advertised by us  
**Now £59.95** post paid.  
 plus free carry case.

■ LIMITED OFFERS  
 ■ WHILST STOCKS LAST  
 ■ ORDER BY POST OR  
 ■ PHONE IN WITH  
 ■ BARCLAY - VISA -  
 ■ ACCESS - TRUST  
 ■ CARDS.

### RANGES

AC/DC Current - 20mA/200mA/10 amp.  
 DC Voltage (auto) - 200mV/2V/  
 20V/200V/1000V.  
 AC Voltage - 2V/20V/200V/600V.  
 Resistance (auto) - 200/2K/20K/  
 200K/2000K ohm.

ALSO AVAILABLE MODEL 6220  
 As 6110 but without range hold and continuity buzzer.  
 Only two AC/DC 200mA/10 amp ranges i.e. 22 ranges.  
 Was £55.95. Now **£42.95** post paid.

**AUDIO ELECTRONICS** Cubegate Limited  
 OPEN SIX DAYS A WEEK • CALL IN AND SEE FOR YOURSELF  
 301 EDGWARE ROAD, LONDON, W2 1BN, ENGLAND. TEL 01-724 3564  
 ALSO AT HENRY'S ROAD, 404/406 EDGWARE ROAD, LONDON W2

WW - 040 FOR FURTHER DETAILS

## SAFGAN DT-400 Series BRITISH MAKE DUAL TRACE 'SCOPES

NEW 20MHz

LOW COST:  
 DT-410 £169\*  
 DT-415 £175\*  
 DT-420 £188\*  
 \* Ex V.A.T.

RELIABLE WITH 18 months GUARANTEE

DT-410, 10 MHz	DT-415 15MHz	DT-420 20MHz
<ul style="list-style-type: none"> <li>★ CH1, CH2: 5mv/div - 20v/div.</li> <li>★ Time Base: 1 sec/div - 100ns/div.</li> <li>★ XY Facility: Matched XY inputs.</li> <li>★ Trigger: Level control, ± Slope selection.</li> <li>★ Auto, Normal, TV Triggering.</li> </ul>	<ul style="list-style-type: none"> <li>★ External Trigger</li> <li>★ Z-Modulation.</li> <li>★ CAL output 1v 1kHz.</li> <li>★ Graticule blue ruled 8x10 div. (4in. CRT) selection.</li> <li>★ Size: H215mm, W165mm, D280mm.</li> <li>★ Weight: 4kg.</li> </ul>	

**PROBE (XI-REF-X10) £10.50**

**SAFGAN ELECTRONICS LTD.**  
 24 GUILDFORD ROAD, WOKING, SURREY TEL WOKING (04862) 69560  
 Carriage: England & Wales £6.50 + V.A.T.; Scotland £9.50 + V.A.T.

London Stockist: Audio Electronics - Tel: 01-724 3564  
 North-West Stockist: Daron Supplies, Warrington, Ches. - Tel: Warrington 64764  
 Avon Stockist: L. F. Hanney, Bath. - Tel: Bath 24811  
 Cardiff Stockist: Steve's Electronics Supply Co., Cardiff - Tel: (0222) 41905  
 Chesterfield Stockist: Kays Electronics, Chesterfield - Tel: (0246) 31685  
 Newcastle Stockist: Aiken Bros. & Co., Newcastle - Tel: 0632 26723  
 Birmingham Stockist: P.A.T.H. Electronic Services - Tel: 021-327 2339  
 Derby Stockist: RTS, Derby - Tel: 03321 41235

WW - 062 FOR FURTHER DETAILS

## CAMBRIDGE LEARNING Self Instruction Courses

Microcomputers are coming - ride the wave! Learn to program. Millions of jobs are threatened but millions will be created. Learn BASIC - the language of the small computer and the most easy-to-learn computer language in widespread use. Teach yourself with a course which takes you from complete ignorance step-by-step to real proficiency, with a unique style of graded hints. In 60 straightforward lessons you will learn the five essentials of programming: problem definition, flowcharting, coding the program, debugging, and clear documentation

**Computer Programming in Basic (CPB) £10.50**

BOOK 1 Computers and what they do well; READ, DATA, PRINT, powers, brackets, variable names; LET; errors; coding simple programs. BOOK 2 High and low level languages; flowcharting; functions; REM and documentation; INPUT, IF...THEN, GO TO; limitations of computers, problem definition. BOOK 3 Compilers and interpreters; loops, FOR...NEXT, RESTORE; debugging; arrays; bubble sorting; TAB BOOK 4 Advanced BASIC; subroutines; strings; files; complex programming; examples; glossary.

Also **THE BASIC HANDBOOK (BHB) £14.50**. An encyclopaedic guide to the major BASIC dialects. A must if you use other peoples' programs. **New completely revised edition.**

and: **ALGORITHM WRITER'S GUIDE (AWG) £4.00** Communicate by flow chart! Learn to use Yes/No questions for: procedures, system design, safety, legislation etc.

### Understand Digital Electronics

Written for the student or enthusiast, this course is packed with information, diagrams, and questions designed to lead you step-by-step through number systems and Boolean algebra to memories, counters, and simple arithmetic circuits; and finally to an understanding of the design and operation of calculators and computers

**Design of Digital Systems (DDS) £14**

BOOK 1 *Decimal, Octal, hexadecimal, and binary number systems and conversion between number systems; negative numbers; complementary systems. BOOK 2 OR and AND functions; multiple-input gates; truth tables; De Morgan's Laws; canonical forms; logic conventions; Karnaugh mapping; three-state and wired logic. BOOK 3 Half, full, serial, and parallel adders; subtraction; processors and ALU's; multiplication and division. BOOK 4 flip flops; shift registers; asynchronous, synchronous, ring, Johnson, and exclusive-OR feedback counters; ROMs and RAMS. BOOK 5 Structure of calculators; keyboard encoding; decoding display data; register systems; control unit; PROM; address de-coding. BOOK 6 CPU; memory organisation character representation; program storage; address modes; input/output systems; program interrupts; interrupt priorities; programming, assemblers; computers; executive programs; operating systems.*

**DIGITAL COMPUTER LOGIC & ELECTRONICS (DCL) £8.50**  
 A course covering the material in italics above, but at a slower pace. (4 vols)

**GUARANTEE** - No risk to you. If you are not completely satisfied your money will be refunded without question, on return of the books in good condition.

CAMBRIDGE LEARNING LIMITED, UNIT 38, RIVERMILL SITE, FREEPOST, St. IVES, HUNTINGDON PE17 4BR

PLEASE SEND ME: - CPB (£10.50) [ ]  
 BHB (£14.50) [ ]  
 AWG (£4) [ ]  
 DDS (£14) [ ]  
 DCL (£8.50) [ ]

Quantity [ ]

FOUR WAYS TO PAY:  
 1) A U.K. cheque or a U.K. postal order (Not Eire or overseas!)  
 2) A bank draft, in sterling on a London bank (available at any major bank)  
 3) Please charge my Access/M.Ch. [ ] Barclay/TrustC/Visa [ ] Am. Exp. [ ] Diners [ ]  
 4) Or phone us with these credit card details: 0480 67446 (ansaphone) 24 hour service.

Expiry date..... Signed.....

Card No.....

**THESE PRICES COVER THE COST OF SURFACE MAIL WORLDWIDE. AIRMAIL:**  
 Please ask for prepayment invoice

Name.....  
 Address.....

Cambridge Learning Limited, Unit 38, Rivermill Site, FREEPOST, St. Ives, Huntingdon, Cambs PE17 4BR England. U.K. Delivery: up to 28 days  
 Reg. in Eng. No. 1328762

WW - 061 FOR FURTHER DETAILS

PHILIPS SCOOPS THE HONOURS WITH  
A NEW CONCEPT IN DIGITAL INSTRUMENTS

## AWARD YOURSELF THE DMC



### FOR SERVICES TO MEASUREMENT

Philips amazing new Digital Measurement Centre is so much more than an ordinary 4½-digit autoranging instrument. Just look at all these quantities which the calculating power of its microcomputer allows the DMC to measure:

- ★ Volts, current and resistance
- ★ Frequency
- ★ Time
- ★ dB (and relative dB)
- ★ Peak voltage
- ★ Relative reference
- ★ Temperature
- ★ Diode forward volt drop

In addition, it's got 5% longer ranges than usual, compensated current measurements and self-test and calibration.

For a free eight-page colour leaflet about the DMC, circle Reader inquiry number 220



**Test & Measuring  
Instruments**

**IN STOCK NOW**  
BATTERY VERSION WITH  
CARRYING CASE AVAILABLE SOON



The DMC is also obtainable from Philips Service Centres



## ANALYSER WITH DISASSEMBLY

PM 3543 logic analyser:


- ★ Disassembly option for a large list of popular microprocessors – costs less than a single personality module from other manufacturers.
- ★ Logic analyser with option package covering 14 microprocessors and RS 232 interface costs less than
- £4,000. IEEE interface also available.
- ★ Sophisticated nested triggering with additional clock and trigger qualifiers.
- ★ Interactive 35 MHz oscilloscope.

Reader inquiry number 221 for a colour brochure.

## NEW OSCILLOSCOPE IS A DIGITAL WONDER

Philips PM 3310 60 MHz digital storage oscilloscope has capabilities extending way beyond traditional limits – and those of competitive instruments. Here's why.

- ★ Four memories (each 256×256)
- ★ 50 MHz sampling rate
- ★ Timebase of 60 minutes to 5 ns/division
- ★ Digital delay of –9 to 9999 divisions.

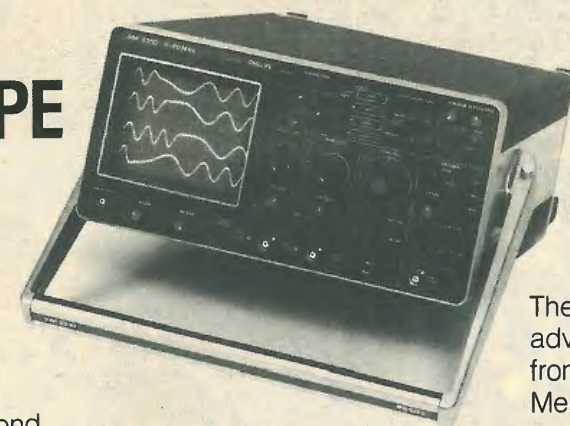

- ★ Roll mode up to 60 mm/division
- ★ Display of stored signal parameters
- ★ Plot-out facility as standard
- ★ IEEE/IEC bus compatible

Reader inquiry number 222 for a colour brochure.

## NEW COUNTERS ALSO MAKE MORE OF THE MICRO

PM 6670 family of reciprocal universal frequency counters:

- ★ 120 MHz, 550 MHz or 1.5 GHz high resolution computing counters
- ★ Unique "counter on a chip" design and microprocessor control for maximum reliability
- ★ Reciprocal counting at low frequencies eliminates ±1 cycle error. Automatic switchover to conventional counting at 10 MHz
- ★ Continuously variable measuring time with display readout
- ★ Error-free triggering with noise suppression
- ★ Choice of timebase crystal oscillators to match applications and budgets
- ★ Facilities for cw, burst, multiple burst, frequency average and arming
- ★ Interface options include IEEE 488/IEC 625 bus, talker/listener
- ★ May be operated from internal battery option, mains or 11.8 to 28 V DC

Reader inquiry number 223 for a colour leaflet




## MUCH MORE TO OFFER

The instruments shown in this advertisement are a small selection from the wide Philips Test and Measuring range.

Circle the inquiry card numbers, listed below, to receive information about relevant product groups.

Alternatively, 'phone Cambridge (0223) 358866 and speak to our Commercial Office on extensions 145 or 148.

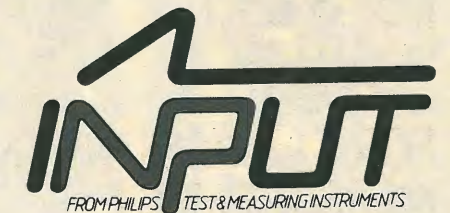

	Inquiry No.
PM 2521 digital measurement centre	220
Logic analysers	221
PM 3310 digital storage oscilloscope	222
PM 6670 counter family	223
25/35 MHz oscilloscopes	224
100 MHz oscilloscopes	225
Pulse generators	226
LF instruments	227
Multimeters	228
Counters range	229
Recorders	230
Philips Microcomputer Development System	231
Audio and video service equipment	232
Power supplies and stabilizers	233

**Pye Unicam Ltd,**  
Philips Electronic Instruments Dept,  
York Street, Cambridge CB1 2PX  
Tel (0223) 358866 Telex 817331

# PHILIPS

# wireless world

## Invention – the orphan

In the last century, life for anyone but the intentionally static, self-sufficient and unaware was restricted, although it is probable that few were seriously worried by the restrictions: a delay of several days in hearing the news that Wellington had won, or a journey from York to London that occupied three whole days would cause little trouble. Nevertheless, any improvement in mobility, the spread of information and education and an easing of the severity of life in general was greatly to be desired. The Industrial Revolution had its origin in these conditions.

Since human nature does not change rapidly, if at all, it is unlikely that many of the engineers and scientists who brought about the fundamental change in life style of the western world did so with any sense of altruism. Then, as now, a man had an idea and was unable to rest until he had a piece of hardware that worked; and if it did, there was a chance of making some money out of it. There is nothing whatever wrong with that – it is a dream cherished by most engineers – and the inventions changed the world for the better, in most cases. The process was apparently logical: an engineer saw a need and proceeded to satisfy it. It may have been that the idea was attractive technically and the inventor would have gone ahead without any other stimulus, but needs were numerous and almost any advance in engineering was useful in some field or other.

Long before the middle of the present century, the majority of man's pressing material and cultural needs had been attended to, in the 'developed' countries, at least. But the drive to be inventive persisted: provision began to precede requirement and eventually to create it – not once, but annually. In the field of technology concerned with domestic, as opposed to industrial engineering, it is now commonplace for companies mesmerized by their own expertise not to perceive a need, but to satisfy a non-existent one. Devices are designed and produced in vast numbers before the public has shown any indication of

wanting them or even knowing what they are, simply because they are technically possible. Not only that, but before the first round of production and the subsequent 'creation' of a market for it is finished, the next version is hurled at us, in slightly modified form and possibly incompatible with the first.

In recent years, this inversion has occurred at least four times. In the early 1970s, perfectly ordinary citizens suddenly discovered an inescapable need to possess pocket calculators. These devices were made solely because it was possible to make them, but that having been done, the market creation had to begin. Before long we were seeing housewives using calculators to add up their supermarket bills: they do not do that now – the 'need', created by advertising, evaporated as quickly as it was formed.

The same process brought into being the digital watch. It was not easy to make the digital output drive hands, so the inferior numerical display was adopted as a substitute. Advertising created a demand for the watches – no public outcry had forced their development – and we will no doubt find hands in fashion again quite soon. Passing over the sorry business of quadrasonic sound, in which the participant companies were too clever for their own good and did not manage to persuade the public to think otherwise, we have now reached the video disc, a development which appears to have little to offer over video tape, and which could conceivably prove to be the sticking point for a baffled and possibly resentful public. In this case, not only does the need not exist; it didn't exist when it was satisfied the first time, with tape machines, in the domestic sphere at any rate.

To pursue technology for its own sake and to pay for it by exploiting the public's total and uncomprehending belief in technology is, at the very least, open to question. A professional soldier may become a mercenary if he runs out of official wars, but an engineer has no need of that – the world is full of ready-made problems to solve without inventing them.

## new SM 85 PRO TECH SOUND

brings a new dimension  
to a hand-held  
condenser microphone

This new high technology Shure microphone will change the way people think of condenser microphones. The SM85 is designed especially for on-stage, hand-held use. Its sound is unique—far more tailored to the special needs of the vocalist: sizzling highs and a shaped mid-range for superb vocal reproduction, and a gentle bass rolloff that minimizes handling noise and "boominess" associated with close-up use. Ultra-low distortion electronics make the SM85 highly immune to stray hum fields. An integral, dual-density foam windscreen provides built-in pop protection.

What's more, the SM85 Condenser Microphone must pass the same ruggedness and dependability tests required of Shure dynamic microphones. As a result, the SM85 sets a new standard of reliability for hand-held condenser microphones.

The SM85 is *extremely* lightweight, beautifully balanced—it feels good, looks good on-stage, on-camera, on-tour. Ask your dealer for a demonstration of the new SM85 PRO TECH Sound, or write to us (ask for AL664) for full details.

**SM85**  
Cardioid Condenser  
Hand-Held  
Professional Microphone

The Sound of the Professionals®

**SHURE**®

Shure Electronics Limited Eccleston Road  
Maidstone ME15 6AU  
Telephone: Maidstone (0622) 59881

WW – 057 FOR FURTHER DETAILS

**Editor:**  
TOM IVALL, M.I.E.R.E.

**Deputy Editor:**  
PHILIP DARRINGTON  
01-661 3039

**Technical Editor:**  
GEOFF SHORTER, B.Sc.  
01-661 3500 X3590

**Projects Editor:**  
MIKE SAGIN  
01-661 3500 X3588

**Communications Editor:**  
MARTIN ECCLES  
01-661 3500 X3589

**News Editor:**  
DAVID SCOBIE  
01-661 3500 X3587

**Drawing Office Manager:**  
ROGER GOODMAN

**Technical Illustrator:**  
BETTY PALMER

**Advertisement Manager:**  
BOB NIBBS, A.C.I.I.  
01-661 3130

DAVID DISLEY  
01-661 3500 X3593

BARBARA MILLER  
01-661 3500 X3592

**Northern Sales**  
HARRY AIKEN  
061-872 8861

**Midland Sales**  
BASIL MCGOWAN  
021-356 4838

**Classified Manager:**  
BRIAN DURRANT  
01-661 3106

JAYNE PALMER  
01-661 3033

BRIAN BANNISTER (Make-up and copy)  
01-661 3500 X3561

**Publishing Director:**  
GORDON HENDERSON

# Interfacing microprocessors

Design, operation and application of a "universal" interface board

by J. D. Ferguson, B.Sc., M.Sc., M.Inst.P., J. Stewart, and P. Williams, B.Sc., Ph.D., M.Inst.P.  
Microelectronics Educational Development Centre, Paisley College of Technology

By using a range of practical circuits, this series of articles explains how to interface microprocessors to other electronic and electromechanical systems. The emphasis throughout is on providing economical solutions for educational and industrial applications, rather than achieving the ultimate performance. Part one describes a "universal" interface board which is directly compatible with the 6502, and later articles describe hardware and software modifications for other microprocessors. A range of extra functions which do not need to be connected to the address or data bus will also be described later in the series.

Most people interested in or involved with microprocessors now realise that there is a gap between a microprocessor and its application. This is an inevitable result of the different aims and skills of the participants. The electronics engineer concentrates on the circuits, the architecture and the bus structure, but to the user these are almost irrelevant. A mechanical engineer may know the functions that the microprocessor should perform, but cannot connect the device to the hardware it must control. A strain-gauge speaks in millivolts, but a microprocessor listens in bytes and sends out binary data. For each problem there are solutions, although they are sometimes difficult and costly or involve additional work by the user.

When designing an interface the most important and difficult decisions to make are which microprocessors/microcomputers should the interface be directly compatible with, how many others could be adapted, and the bus structure and board format to meet these requirements. The board and bus structure are closely linked and may constrain the

choice of microprocessor. For example, the S100 bus supports the 8080/Z80 family but boards have been designed for the 6800 family. However, the large board size and mixed power supplies make the S100 an unsuitable format. The high cost of Multibus and other industrial standards makes them inappropriate for educational use.

An economical and standard board is the Eurocard which is widely available and can be mounted in standard racks. The Acorn bus structure, which was chosen, enables the interface to be directly used with a low cost unit, a rack-mounted system, or the new BBC computer. However, with suitable interconnecting cables, the interface is equally compatible with the Aim 65, Apple and Pet.

The choice of functions is a compromise between the desirable and the economically feasible. The final design includes digital-to-analogue conversion, analogue-to-digital conversion with 16 input channels, 16 line i/o ports, 8 output drivers, 2 counter-timers, serial i/o and handshaking lines. As many microcomputers and microprocessor boards already offer a few functions, the corresponding i.cs can be omitted on the interface without affecting the remaining functions.

The parallel i/o ports, handshaking, counter-timer and serial i/o are all achieved with a 6522 v.i.a. (versatile interface adapter) whose programming can be as complex as the c.p.u. if all possible functions are considered. However, by starting with the parallel ports and gradually including the other options, programming can be kept manageable. The d-to-a converter is based on a ZN425 which, with extra gating, can be used as an a-to-d converter. To increase the d-to-a flexibility, the parallel ports can gate the d-to-a output to a series of sample-and-hold circuits. Although this technique slows down the response, it is satisfactory where, for example, multiple analogue outputs are required to drive electromechanical loads.

An important part of the interface is the ADC8017 16-channel successive approximation a-to-d converter. This device contains internal switching and gating which allows it to be connected directly to the address and data lines of most 8-bit microprocessors. Although the 8017 is not particularly fast, the ability to scan 16 analogue channels and load the data into memory with simple hardware and software makes it an ideal device for data-

Fig. 1. Basic interface system which uses three main i.cs to provide a range of functions. Further circuits which do not need to be connected to the address or data bus can be easily added on daughter boards.

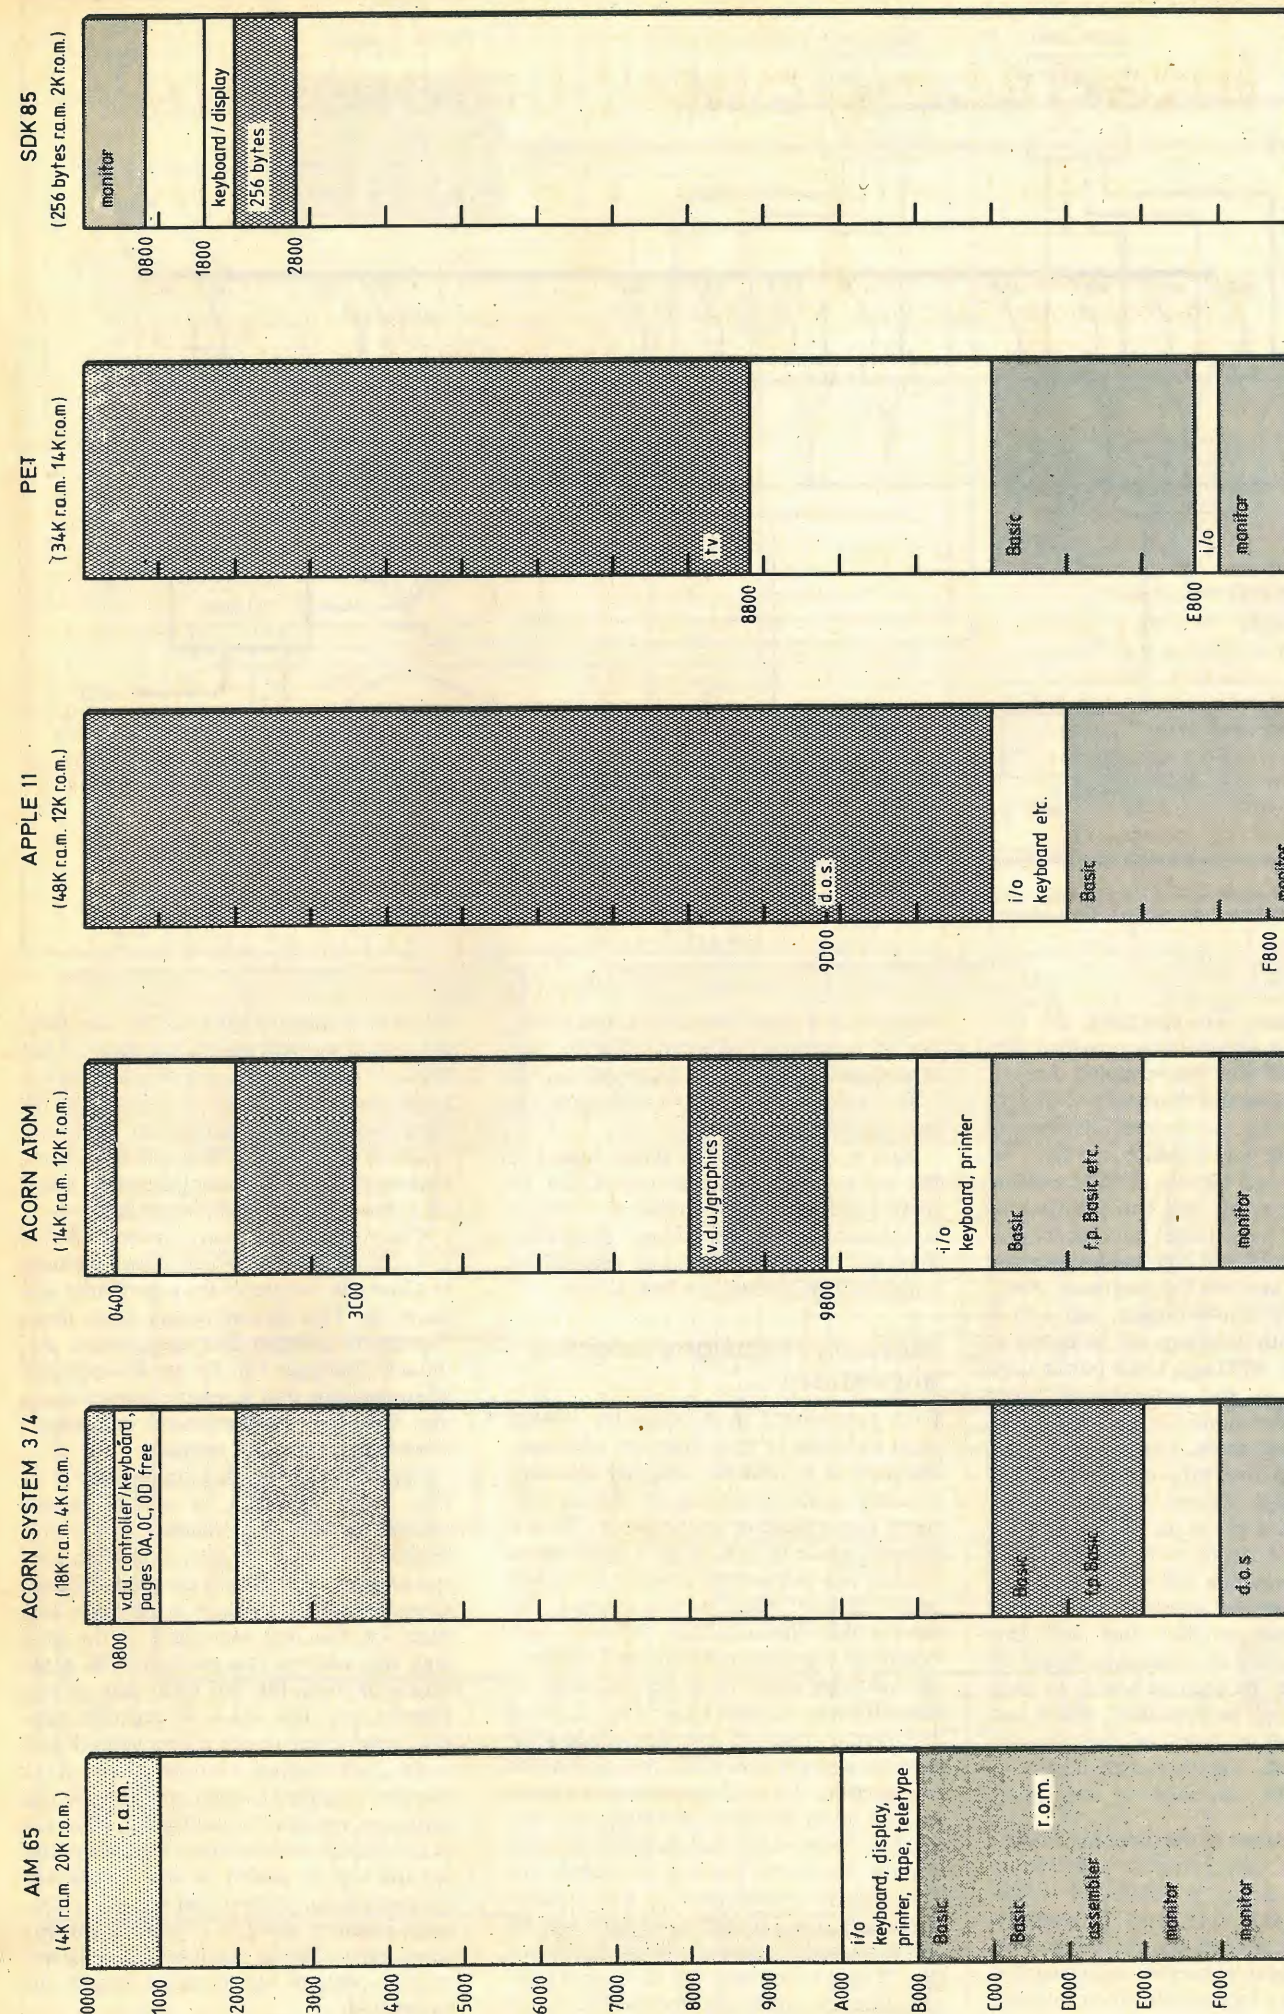
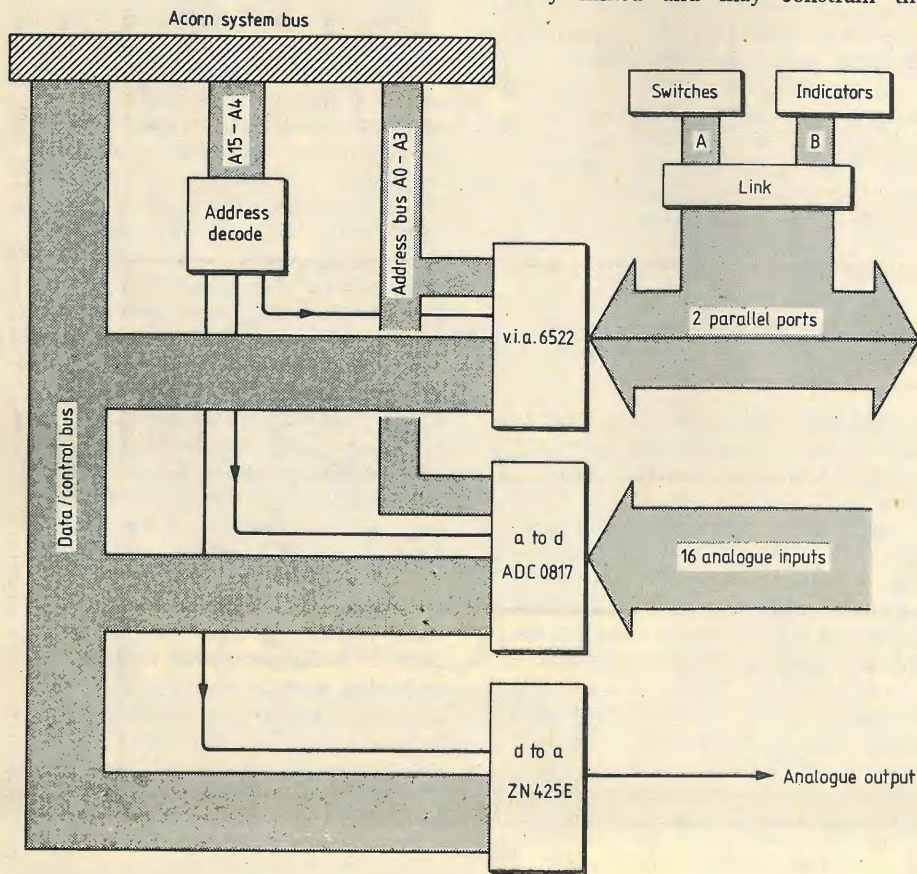


Fig. 2. Memory maps of the popular 6502 based microcomputers and an 8085 system.

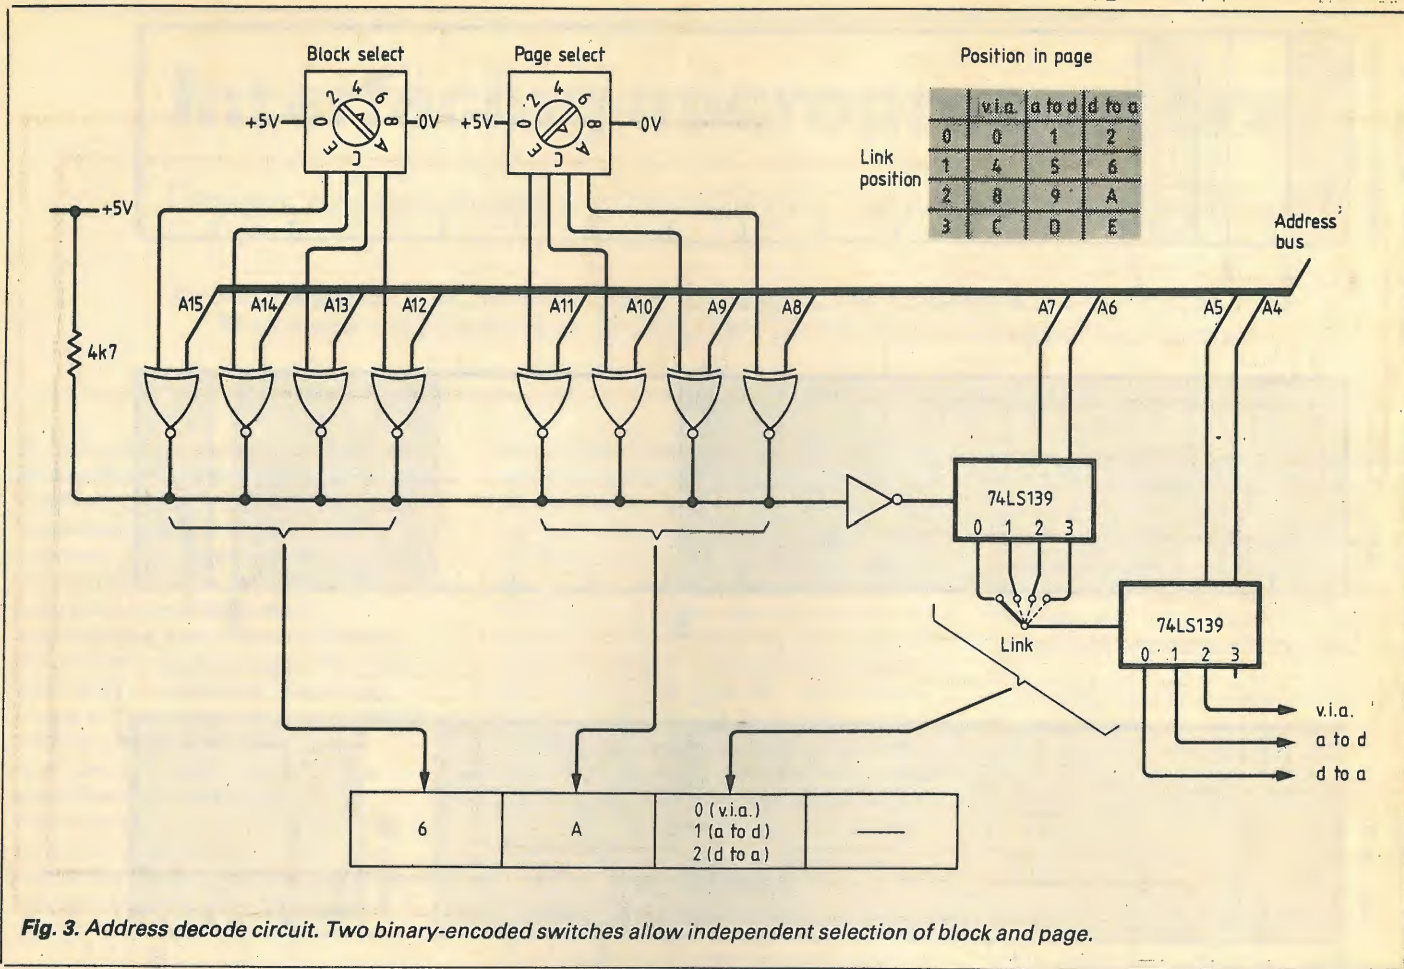


Fig. 3. Address decode circuit. Two binary-encoded switches allow independent selection of block and page.

logging systems. To complete the interface, output drivers are provided for switching i.e.ds and opto-coupled devices such as transistors and thyristors. C.m.o.s. logic is used for the output drivers to prevent loading port B which can then be used with external signals. If the i.e.ds on the board are used, and the interface is plugged into a suitable microprocessor system, no additional connections are required to run and test i/o programs. Also, by linking the d-to-a output and a-to-d input lines, both functions can be tested at the same time. Although these points may seem trivial to the experienced user, simple demonstrations have proved to be valuable for beginners. Extensions to this board could include opto-coupled switches, power control devices, signal conditioning, e.p.r.o.m. programming and microprocessor communication. These options, which will be covered later in the series, are not necessarily connected to the address or data bus and can therefore be added on a daughter board or via a socket on the original board. In each case a circuit will be described, which can plug into one or more of the popular microprocessors, together with details of how it can be modified to suit other systems.

The arrangement of the three main components in the basic interface is shown in Fig. 1. Each device is connected to the control and data bus, and is memory mapped by the address decode circuit. The v.i.a. and a-to-d converter each require sixteen memory locations for their internal

registers and input channels respectively, and each location is selected using the four least-significant address lines A0 to A3. The single channel d-to-a converter requires only one location.

Sets of switches and i.e.ds are linked to the v.i.a. so that external loads can be driven and sensors monitored to allow i/o simulation while developing programs. The 6522 has several other capabilities which will be covered in a later article.

### Memory maps and address allocation

Each component in a computer system must have one or more memory addresses assigned to it, and the designer allocates memory space according to the components importance or convenience. With a memory space of 64K bytes it might seem simple, but as a system expands more and more memory space is pre-empted. To ensure that this interface or other new board can be used with different systems, the memory maps must be compared to identify their unused areas. Fig. 2 shows the memory maps of several standard 6502 systems and a typical 8085 arrangement for comparison. All 6502 systems have r.o.m. at high order memory, although only the top few bytes which include locations used for the automatic start-up procedure are essential. It is convenient to use adjacent areas for r.o.m., though some gaps may be left for other functions as in the Apple and Pet. There is normally r.a.m. in zero page (the first 256 bytes) and memory access to

this area requires fewer bytes and less time using the zero-page addressing mode of the 6502. It is sensible to use this facility for rapid access to data which is required repeatedly by various programs. Page one (location 256<sub>10</sub> - 511<sub>10</sub>) also contains r.a.m. because the 6502 uses this page as the stack for subroutine jumps and interrupts.

The Aim 65 and Acorn system 3/4 follow a similar format which allows the user to adapt the computer for a particular application. This flexibility has made them popular in colleges and universities. Although the Apple and Pet are also popular in engineering and scientific applications, they are ideal programmers' computers, filled to the brim with memory.

The address decode circuit shown in Fig. 3 is the result of several design changes to give the interface board the flexibility needed for operation with several systems. Two binary encoded switches allow independent selection of block and page, i.e. the first two digits of the four digit hex address, via exclusive-OR gates which monitor the top eight bits of the address bus. The 74LS139 decoders provide chip select to the d-to-a, a-to-d and v.i.a., allocating sixteen sequential memory locations to each, and modify the addresses via links by adding 40, 80 or C0 to the chosen base address. Therefore, the circuits can be added to any compatible microprocessor system that has an unallocated memory space of at least 64 consecutive bytes. Where memory space is not critical, parts of the decoding circuit can be omitted.

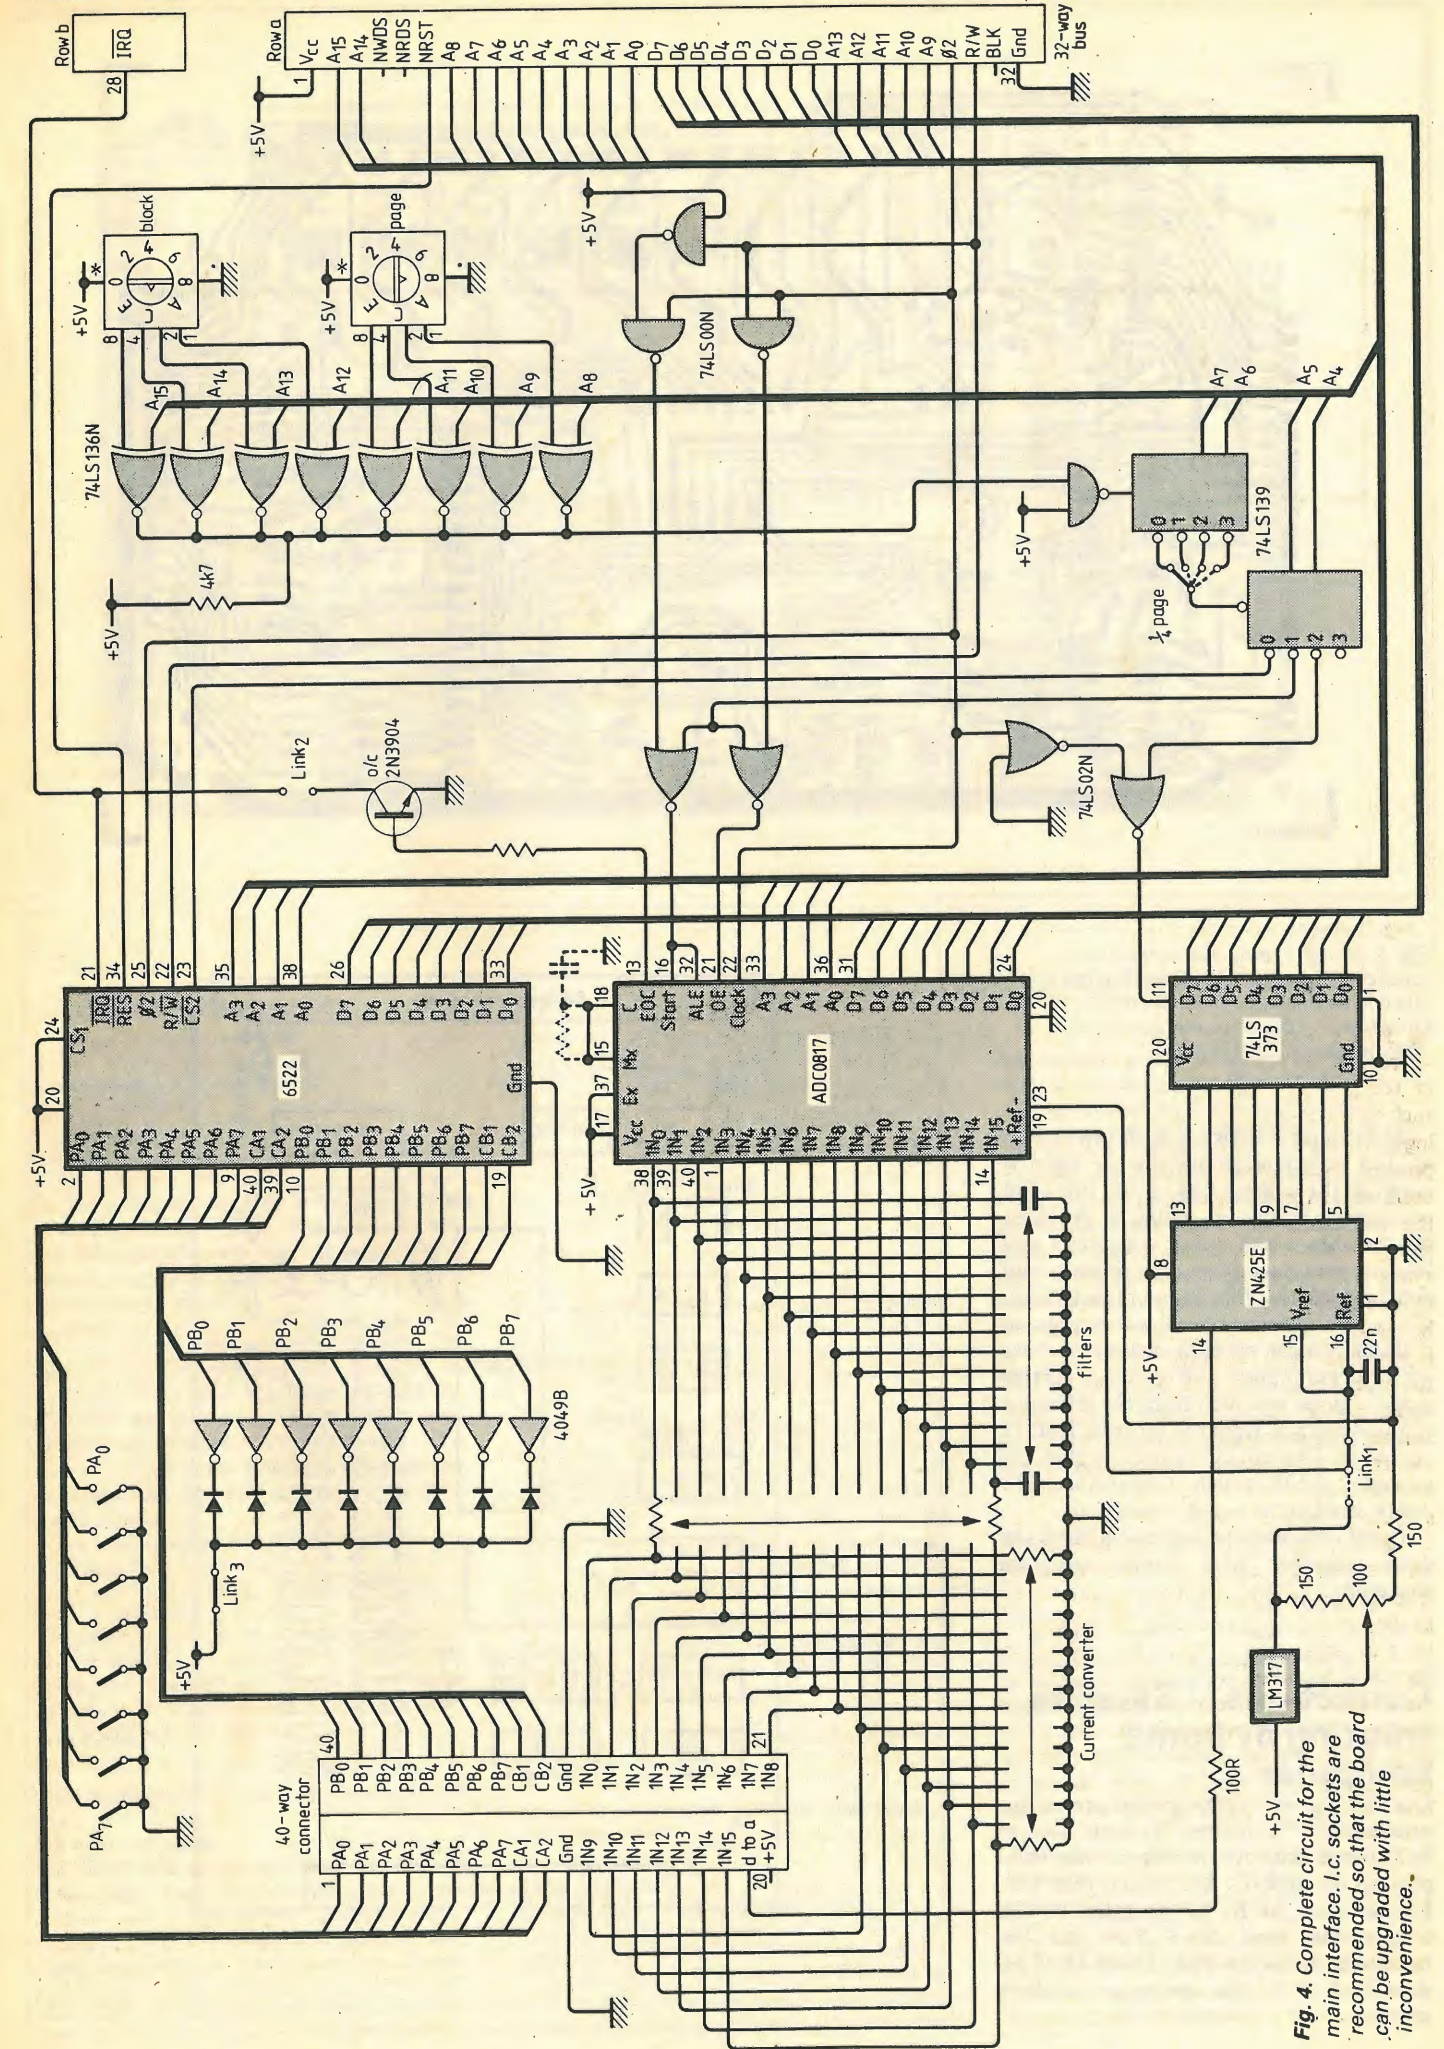


Fig. 4. Complete circuit for the main interface. I.c. sockets are recommended so that the board can be upgraded with little inconvenience.

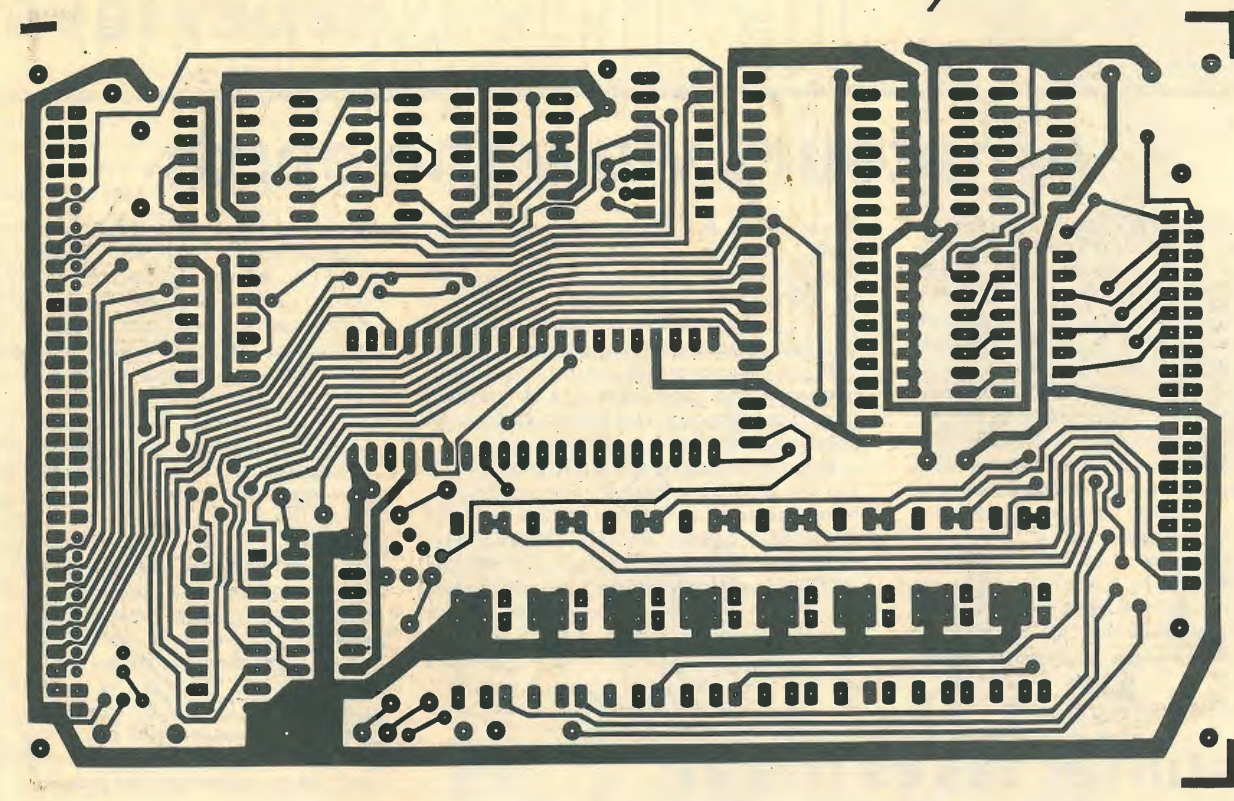
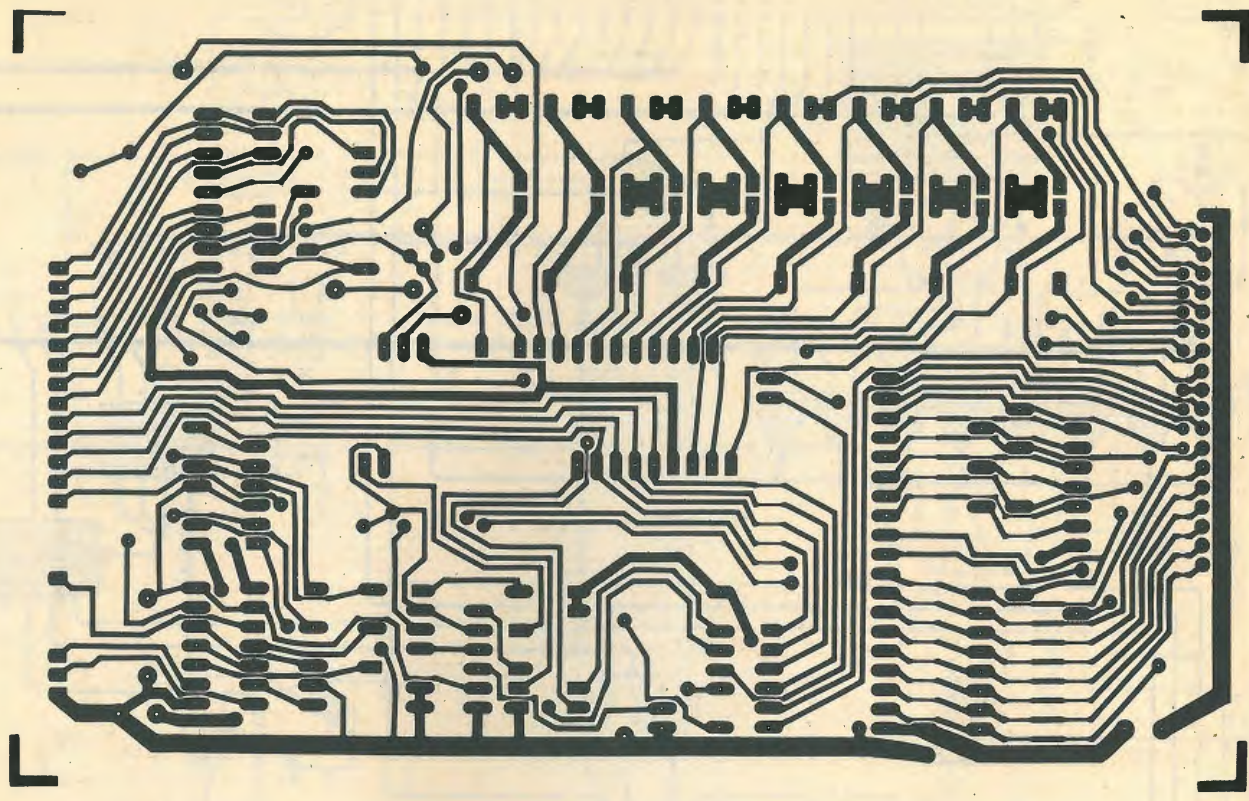



Fig. 5. Board layouts and component location diagram. Assembled boards and kits will be available from Control Universal, 11 Bush House, Bush Fair, Harlow, Essex. CM186NS.

The complete interface is shown in Fig. 4. The decoding circuit on the right is wired to the address bus on the Eurocard connector. Additional gating is provided for the d-to-a and a-to-d converters and both devices have protective resistors and simple capacitive filtering to reduce noise. The a-to-d converter also has the option of a shunt resistor on each channel for use with current inputs. The reference for this device can be provided from the reference of the ZN425 or from the separate LM317 regulator. This can be trimmed to give, for example, 2.55V which is convenient for 10mV steps in the a-to-d conversion.

Part 2 describes the functional blocks in detail together with simple program examples.

### Corrections — Satellite tracking by home computer

One or two errors in the second part of this article in the September '81 issue need to be pointed out: At the top of the third column on page 67, DC should read DE. In line 16 of the BURP program, N=CS SIN should read N=S SIN and the beginning of line 36 should read IF W>0 A=180 A + !. We apologise for these errors.

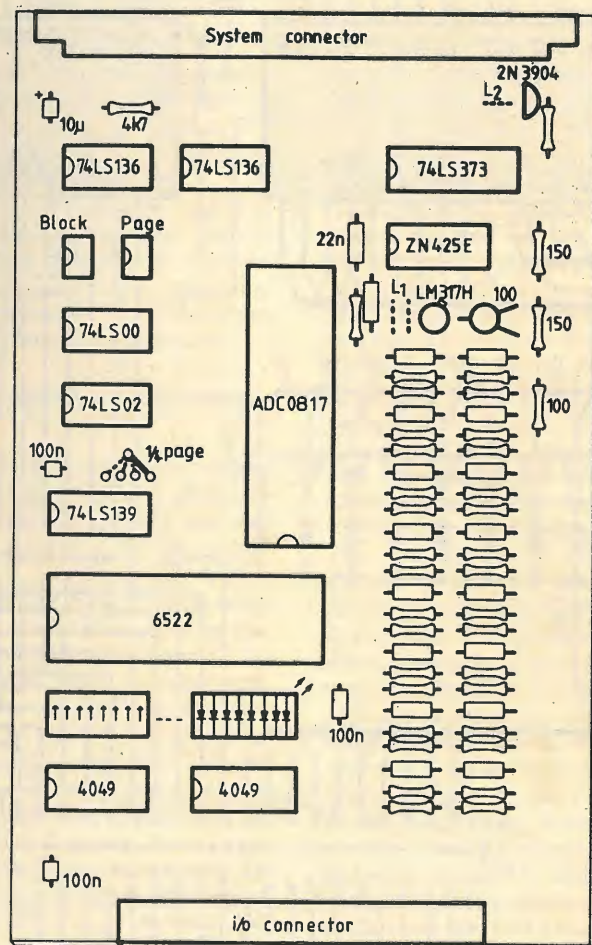

**Atom Business**, by John Phipps. 110pp., paperback. Phipps Associates, £6.95.

Nuclear physicists are not necessarily the prime audience for this little book, since it contains a set of programs for use with the Acorn microcomputer in business. Peripherals needed are a domestic television receiver and a cassette recorder: a printer is useful, but not essential for most of these programs.

Complexity varies from a simple listing to perform running addition to a program for determining the effects of various parameters on the length of a queue — probably this could be varied for use in other circumstances, such as the piling up of work in a machine shop. The reasons for each program are set out and operating instructions presented in simple terms prior to each listing.

The book is completely practical in that there is nothing on programming as an art — simply the programs, including one which will help to make a decision on whether to lease or buy equipment, a sales record, a nominal ledger and one for working out expenses. A cassette containing the programs is obtainable from Phipps Associates, 3 Down Avenue, Epsom, Surrey KT18 5HQ at £7.50, plus v.a.t.

**Video/computers**, by Charles J. Sippl and Fred Dahl. 246 pp., paperback. Prentice-Hall International, £5.55.

Messrs Sippl and Dahl base this book on the premise that much of the domestic video, viewdata, audio and computing machinery currently considered as separate entities should, and inevitably will, be brought together to form what they call an integrated video computer. Such a collection of electronics would, as we are

## BOOKS

constantly told, bring about a social revolution in working habits, communication, banking, shopping . . . etc, but, although much of the technology already exists, there are problems still to solve.

Adopting an extremely methodical approach, the authors consider all the ingredients of such an integrated system, one by one, and try to form an opinion on the way they will develop if the i.v.c. is to come along. They view the concept from several angles — video, computing, data conversion and communications, explaining what is now in existence and what will have to be done in each sector to reach the goal of an integrated system. The conclusion is eventually drawn that the i.v.c. will be with us towards the end of the decade, given that legalities and vested interests can be surmounted, and that we will then have a "worldwide network of total communications".

**Latest Developments in Sound Broadcasting**, Ed: John Lovell. 77 pp., paperback. IBA, London.

Local radio is the subject of the fourteenth in the IBA Technical Review series, and contains nine articles by IBA staff and consultants.

Studio design, installation and testing are covered in the first three sections, followed by a description of the contribution network, which

enables local radio companies to send news items to IRN in London for national use. Technical features of the first i.l.r. transmitters are reviewed and there is a description of the solid-state Phase 2 stations, including a look at pulse-width modulated (Class D) power amplifiers.

A section on the Borehamwood m.f. aerial for the London area describes the design of an extremely complex system, which must not only cover its service area and avoid other areas serviced by other transmitters, but must do this at two frequencies simultaneously.

Surround sound is discussed, in theory and practice, and in the final section the head of Long-range Studies looks at the future of radio broadcasting. Technical Review 14 is available from IBA, Brompton Road, London SW3 1E7. No charge for single copies.

**The ZX81 Pocket Book**, by Trevor Toms. 136pp., paperback.

Phipps Associates, £4.95 (Cassette £5.00). Owners of the Sinclair ZX81 microcomputer who have worked through the handbook supplied may feel the need of additional tuition in the techniques of programming. If so, this book should be of assistance.

To illustrate the sections of instruction (on efficient programming, using machine code, using data files, etc.) a number of programs, mainly games, are presented and explained. The book is not simply a rewritten version of the ZX80 Pocket Book, but is said to be almost completely new, since the ZX81 is quite different to the ZX80. Much of the content can be used by ZX81 owners who do not possess the 16K r.a.m. A cassette, containing the programs described in the book, is also available.

Phipps Associates are at 3 Downs Avenue, Epsom, Surrey KT18 5HQ.

# NEWS OF THE MONTH

## Amateurs view the earth

By the time you read this, Britain's first amateur satellite should be in orbit 330 miles up with an inclination of 97.5° and a 98 minute period. Organized by the University of Surrey department of electronic engineering, the launch was to accompany a NASA solar Mesosphere Explorer spacecraft, set for September 12 at the time of going to press, and is especially interesting in Vosat's ability to provide earth pictures for display on a domestic tv receiver. The satellite will not be fully operational immediately, though the v.h.f. and v.h.f. beacons should be in use for telemetry; picture transmission should start in a few weeks time.

The pictures are taken by a charge-coupled imaging array made by GEC's Hirst Research Centre and provides land and sea image data for digital transmission over the v.h.f. beacon using a.f.s.k. at 1200 bit/s, line synchronous. Image

format is 256 by 256 element, with 16 grey levels, stored in an on-board 0.25 megabit memory. The camera is organized to cover 500 by 500km areas of the earth's surface, with a resolution of about 2km, optimized to enhance land features and land/sea boundaries. All being well, this experiment will also display processed telemetry and experiment data in graphical form. The University team promise circuitry for interfacing with a tv set later in the year.

Beacons transmit on 145.825MHz with 450W and 435.025MHz at 800mW. Further beacons, phase-referenced on 7.050, 14.002, 21.002 and 28.002MHz support ionospheric experiments whilst two microwave beacons on 2.401 and 10.470GHz are for studying s.h.f. propagation — intended to help develop inexpensive microwave satellite ground stations. The two data beacons, v.h.f. and u.h.f., should provide a

reliable satellite-to-ground link for reception by simple amateur stations: an unmodified narrow-band f.m. receiver together with a fixed pair of crossed dipoles should do for most passes. Besides normal telemetry data, computer outputs, synthesized speech for school demonstrations, and earth imaging data are also information sources for the beacons.

The computer is based around the RCA CDP1802 microprocessor, enables telemetry surveillance, command and status management, experiment data storage and processing, dissemination of orbital data and operating schedules, and closed-loop attitude control. It has direct high-speed data links with the magnetometer and radiation experiments, and access to the earth-imaging memory area for image processing. Program is resident in dynamic r.a.m. loaded from the ground via the telecommand link and which can be modified, or replaced during flight, from ground. Commands from ground stations take precedence in cases where commands emanate simultaneously from both the microcomputer and ground.

## Foxhunter takes the air


Marconi's Foxhunter, the multi-mode radar for the Panavia Tornado 2, made its first flight in the Tornado air-defence variant at Watton on June 17. Since that date, the radar has operated in all its major modes.

Trials have been progressing at Bedford in a modified Buccaneer since shortly after the initial MoD production contract was placed in late 1979. First deliveries of the equipment are due to start in 1982 for RAF service two years later: a run of 200-250 radars is the likely figure, assuming that defence cuts do not affect the number of Tornado ADVs to be built. Further, modified radars may be exported later.

Foxhunter operates in several ways. It uses the pulse-Doppler technique to avoid static clutter and will search an area, track several aircraft simultaneously while continuing to search, can

display a map of the ground and 'locks on' to a target — the Skyflash missiles carried by the Tornado use reflected radiation from the target for guidance. In the photograph, the truncated cone is the two-reflector aerial. The signal is launched through the rear dish, is reflected from the forward element back to the rear one and collimated into the forward beam, the polarized radiation firing through the slatted forward reflector. A glass-fibre cover forms a skirt between the two.

Foxhunter is extremely compact, compared with existing radars, but even so occupies nearly all the cross-sectional area of the Tornado nose forward of the cockpit. The black object protruding from the nose is the 'brim' of a 'top-hat', around the crown of which are arranged all the signal-processing modules.

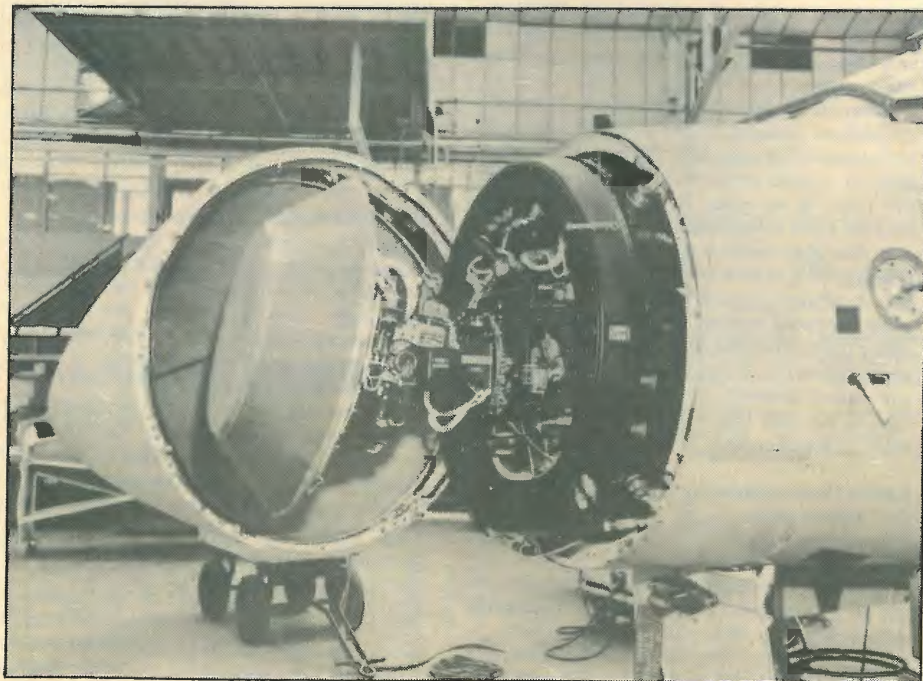

## Cascade noise reduction

Integrated circuits for the new Dolby noise reduction system are being sent to licensees this month. Made by Hitachi, but designed by Pioneer, the i.c.s are off the mark much sooner than expected. Dolby originally said that dedicated i.c.s would not be available until some time next year, but it is undoubtedly market pressure that has accelerated development. Dolby says that better sound sources, higher listening levels and a "genuine market desire" for more noise reduction prompted the new system, which reduces noise by up to 20dB. But as competing n.r. systems abound now and threaten Dolby's growth in this area, Dolby clearly needed to come up with something new, having found that the B circuit couldn't be pushed far enough without adverse effects, both errors in frequency response and overshoot.

So they adopted the approach of cascading two sliding-band circuits, each working at different levels (rather than different frequencies). But although a good amount of noise reduction is obtained in this way, as many enthusiasts have discovered, it is not altogether satisfactory by itself — what is described as a mid-frequency "mud" still remains. Dolby found that to rebalance the amounts of high, mid and low-frequency reduction the turnover frequency, 1.5kHz in the B-system, was best set two octaves lower at 375Hz for the cascade-circuit. A slightly higher compression ratio of 2.2 instead of 1.9 is used and further circuitry is needed to keep side effects down: h.f. de-emphasis at the encoder input to reduce mistracking, and a network in the low-level stage to prevent tape saturation at high signal levels. With this additional circuitry the C system, as it is called, is claimed to be "at least as free of side effects as the B system". Altogether Dolby says the circuitry costs 2½ times as much as the B system but that falling i.c. prices partly offsets this.

## Naval radar

In an effort to help warships survive when attacked by an extremely varied, agile and 'intelligent' array of nastiness, Plessey has developed a new S-band radar, the AWS-5.

Many constraints are imposed on such a radar. High-flying aircraft must be detected at the same time as sea-skimming missiles; small, fast attack craft, which carry sufficient weaponry to embarrass a cruiser, may press their attentions at precisely the same time as a vertically diving missile aims for the funnel.

AWS-5 comes in several forms, for different kinds of warship, but the most comprehensive variety offers a dual-beam aerial on a stabilized platform. The differing sizes and direction of approach of attacking objects are catered for by aerial design and the use of pulse compression. Two aeriels are used — a main parabolic reflector for low-angle detection and a smaller type mounted over the main one for high angles. No height-finding facility is incorporated, both beams being narrow horizontally, but some discrimination between high and low objects is obtained by comparing the returns from the two search patterns. The two are multiplexed and can be viewed separately. Coded-pulse compression confers long range, high resolution and a low peak power requirement: the technique is one variety of the 'chirp' process, in which the radiation is frequency-modulated during the pulse; here, phase changes at each transition of a pseudo-random code. Peak power can be kept low, which means that the radar is less easy for an attacker to detect, and resolution can be changed by simply modifying the code. The

coding is difficult to analyse and confuse.

To avoid jamming, the transmitter uses a travelling-wave tube, which can be made frequency-agile, while sea clutter is reduced by the use of a developed version of Plessey's adaptive moving target indication technique. The search area is considered as a great number of 'cells', which are defined by the transmitted pulse length in the radial (distance from transmitter) dimension and bearing gates in the tangential direction, the average signal level in each cell being digitized and stored. Variations in this level on succeeding scans are assumed to mean that an object has entered or left the cell and the return is displayed: if nothing has changed, it is blanked. The process is complicated by the motion of the ship, but the principle remains. Two foreign navies have ordered the radar, and the Royal Navy is said to "be interested".

Plessey's AWS-5 radar being vibration tested.




Although of not such a high speed as the world land-speed record, racing motorcyclists have similar communications problems which have been solved by Pye Telecom whose mobile radios and 'pocketrones' were used at the Formula 1 and Classic T.T. Races on the Isle of Man. The Driver of the winning Suzuki machine, shown here, was Graeme Crosby and he and his team used the radios for a two-way flow of race information and tactical decisions. A further Pye Telecom radio system was used by the race marshalls, who had mobile radio telephones mounted on their motorcycles. This enables them to react quickly in the event of accidents, summoning help and warning the organisers.

## High-speed car radio

Richard Noble will make his attempt on the world land-speed record in October with Thrust 2, which is powered by a Rolls-Royce Avon jet engine and which, Noble hopes, will move at around 700 m.p.h. For the attempt, a number of communication channels are needed to link support crews at the ends of the run, a high-speed fire tender, timekeepers, an observation aircraft and the driver himself. Racal-Messenger have planned a multiway u.h.f. link which will allow several conversations to be carried on simultaneously, being overridden by transmissions from the car, which will be received automatically by all units. The aerial is of the 'blade' type normally used on high-speed aircraft.

Yet another application of electronics at high speed is in the Grand Prix racing car which uses the 'ground effect'. The effect is achieved by designing cavities in the underside of the car which act as venturis. When air passes under the venturis, the car is physically sucked down onto the track, offering greater stability and consequently higher speeds. Unfortunately the gap between the venturi and the surface of the road is critical to the level of suction obtained, and it is necessary to establish which type of suspension system will give the best performance to take advantage of the effect in a car which is subjected to a constantly changing pitch through rapid acceleration and hard braking. The French Talbot-Ligier Grand Prix team use a Sangamo UDC 100 longstroke displacement transducer, linked to on-board monitoring equipment, to record the changes in suspension geometry as the car is driven at racing speeds.

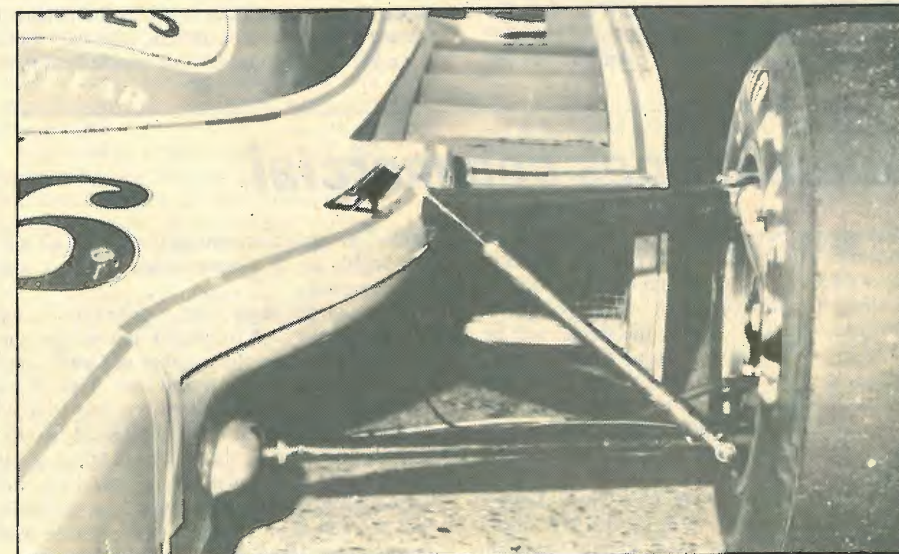


# Cardphones — towards a cashless society?

Major London railway and tube stations are to have Cardphones installed in a trial for what British Telecom call "a step towards the cashless society." But before you get too excited, cashless does not mean broke — Cardphones eat Phonecards and that means purchasing either forty or two-hundred 5p units in advance.

A Phonocard is a piece of plastic similar to a credit card with 'holographically memorized' call units printed on it. As a unit is used up, so that unit is erased, but a warning is given twenty seconds before the last unit runs out to give you time to fumble for a new card, say goodbye or utter an expletive (Cardphones don't accept coins). Throughout a call, though, a readout tells the caller how many units are left without making a call by simply inserting the card in the slot — completely free of charge!

Long, consecutive and overseas calls to countries now on the direct dialling system are not hampered by the insertion (and availability) of coins, but if you make one call directly after another you still lose any remaining parts of a

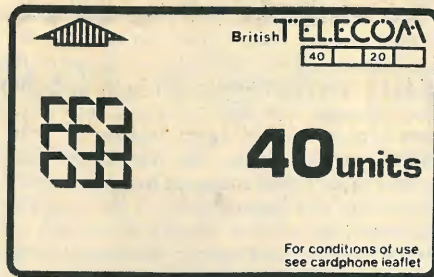

unit, as is the case with present domestic and public telephones.

Each card has one or two tracks, depending on its price, on which the call units and other information are printed. The extra information tells one of the two microprocessors used in the system whether or not the card is acceptable, i.e., whether British Telecom intended the card

for making public calls and whether the card is indeed issued by them and not by any other authorities with similar systems. Belgium and Austria already have such systems and the French are making trials.

The call units are read by a configuration of infrared detectors that pick up reflected light from the coded patterns on the card. As a unit is used up it is erased thermally.

A second microprocessor looks after the normal routine of the dialling system and allows normally free calls such as '999' and directory enquiries to be made without the use of a card. The system was developed in Switzerland by Sodeco, a subsidiary of the Landis and Gyr Group who are now supplying the apparatus to British Telecom.

Initially around 120 Cardphones are being installed in London and another 80 or so will appear in Birmingham, Glasgow and Manchester. Phonecards will be available from post offices and some retail outlets including railway station bookstalls and fare counters.

# Small wavelengths — large doubts

Over the years there has been much mild controversy in most western countries over the maximum safe level of microwave radiation. Recent news that an American body for workers' compensation defined the cause of death of a radio technician as chronic exposure to microwave radiation will hopefully invoke a closer look into the long term effects of these rays.

As in most Western countries, the maximum safe level in Britain for continuous exposure to microwave radiation is defined as  $10\text{mW}/\text{cm}^2$ , a figure 1,000 times higher than that adopted by the Russians at  $0.01\text{mW}/\text{cm}^2$ . Taking into account that the conditions associated with these figures are not exactly the same, the difference is still enormous.

Our maximum level is based on that determined by the Americans nearly 20 years ago. According to an International Electrotechnical Commission report† from 1979, the very large discrepancies between standards are due to differences in approach, namely that the USSR standards are based on the possibility of any noticeable biological effect, in contrast to thermal injury, and most western countries take the view that minor reversible effects are not necessarily hazardous to man. Also, say the IEC, the Russians have used very much larger safety factors than most other countries in defining their limit. As there is, even now, much

doubt as to the long-term effects of microwave radiation, large safety factors seem a sensible precaution.

There are stumbling blocks in researching the effects of microwaves on humans, though, that could account for the uncertainty as to the 'safe level' of radiation. One problem appears to be the lack of a suitable guinea-pig; the position, size, density and material of every part of the body can be critical. Also, measurements made in the 'near field', i.e., the complex field close to the antenna which contains electric and magnetic components additional to those of the main propagation field, are difficult to interpret in terms of potential hazards.

According to the National Radiological Protection Board, frequency dependent limits have been proposed in the USA to bring down the maximum exposure figure to  $1\text{mW}/\text{cm}^2$  at frequencies where the radiation has the greatest effect on the human body. But only time will tell whether these new limits, if accepted, are safe, or indeed whether the old limits were on the safe side anyway.

● Research into electromagnetic coupling between a 'thin-wire' antenna and a biological body was reported in the IEEE's publication dealing with microwaves\* last November. The research was carried out to assess the potential hazard of portable transmitters, especially those for c.b., and some interesting conclusions were

drawn. According to the article, the power absorbed by a human adult standing 20cm away from an antenna with a 30W input at 90MHz or 140W at 27MHz is the same as would be absorbed from exposure to  $10\text{mW}/\text{cm}^2$  plane-wave irradiation. An average human adult standing 20cm away from a quarter-wave antenna operating at 20MHz will absorb about 8.5% of the antenna input power, but at 90MHz, over 50% of the input power will be absorbed as the average height of an adult is about a resonant length at this frequency. Electromagnetic coupling is increased considerably when the body is in contact with the ground, as opposed to being isolated, and the body may act as a director element when placed close to the antenna.

† IEC report number 657 'Non-ionizing radiation hazards in the frequency range from 10MHz to 300,000MHz.'

\* IEEE transactions on Microwave Theory and Techniques, Volume MTT-28, Number 11 (part 1), 'Electromagnetic coupling between a thin-wire antenna and a neighbouring biological body', by K. Karimullah, K.-M. Chen and D. P. Nyquist.

# Satellite on a string

Sounding rockets remain in the air for only a few minutes; low-altitude, non-propulsive satellites can gather data for a few hours before their orbits decay. A possible solution could be a low cost satellite tethered by a long (very long — up to 60 miles) super-strong cord to the NASA space shuttle.

Engineers from the Marshall Centre have been carrying out feasibility studies with space scientists from Italy for what could be the first US/Italian cooperative space project. The Italians could build the satellite and the Americans would supply the equipment necessary to handle it. The satellite, attached to the shuttle by the tether line, would be trolled through the Earth's upper atmosphere in a very low orbit, perhaps only 80 miles above the Earth, for an extended period. It would be used to gather data on the atmosphere, the magnetosphere and gravity. The system is likely to become operational by the mid 1980s.

# Teletext goes commercial

You can now buy a page of text on Oracle, the six-year old ITCA teletext service, for a weekly rate of £400. That page would then be available to the 180,000 teletext-equipped sets throughout the UK, though the service will be available on a regional basis. First Scottish Television start their own input unit this autumn followed by Channel TV some time later, culminating in a fully regional service by 1984/5 that can offer local news as well as advertising — by which time the number of teletext sets is predicted to be 3,000,000. Oracle Television Ltd, formed last year by the ITV companies, will promote itself mainly through

"filler" tv advertisements to the tune of £2 million-worth of tv "commercials" over a six-month period.

At about the same time — probably during the Department of Industry's teletext promotion in October — the number of Oracle lines will be increased from two to four. This allows the access time to be reduced typically from 45 to 20 seconds, which otherwise would become unacceptably long as the volume of text pages is increased. One feature of this new service is that certain advertising not permitted on television will be allowed on Oracle — from football pool promoters and bookmakers in particular.

# Integrated circuit design

Understanding the nature of black boxes may make a significant contribution to circuit performance

by J. L. Linsley Hood

**The starting point for this series of articles is the i.c. that perhaps has done most to encourage the application of op-amps as a simple, cost-effective solution to circuit problems.**

Historically, the 741 device was introduced by Fairchild at the end of the 1960s, along with several other second-generation i.c.s from rival manufacturers, as an internally-compensated improvement upon Bob Widlar's classic 709. In the Fairchild  $\mu\text{A}741$ , most of the minor operational problems of the 709 were reduced to an extent that they were no longer inconvenient in use, and the 741 then became a nearly ideal building block for low frequency applications.

Understandably, many of the internal circuit facilities such as output short-circuit protection were similar to, and inspired by the same requirements as, those being introduced in the discrete component audio amplifier designs current at the time. However, the standardization on the use of separate + and - supply lines, together with nearly identical inverting and non-inverting inputs and the use of circuitry which allowed a high degree of supply line isolation, presaged developments which the discrete component amplifier designs were not to adopt at all widely for many years.

I have shown the circuit, in very simplified form, in Fig.1, with the necessary apology that a simplification of this type inevitably takes liberties with the actual design, simply because a more accurate representation of its form would hardly be a simplification

at all. For example, although I have shown the input transistors as a p-n-p long-tailed pair, because this is effectively how they operate, they are in reality a rather more complex arrangement to allow the use of a pair of n-p-n devices in the input stage — in a modified cascode connection — of a form which is identical to, and perhaps inspired by, a circuit proposed a couple of years earlier\*.

The reason for this rearrangement, shown in Fig.2, is that it is very difficult in conventional bipolar technology to fabricate p-n-p transistors which have any respectable current gain  $h_{FE}$ , except in the case where the collector is electrically connected to the p-type substrate such as in the output device. Other p-n-p devices must be of the lateral type, as shown in Fig.3. These are robust, but generally have  $h_{FE}$  figures only in the range 5 to 25, depending on the skill of the manufacturer in defining small gaps in his diffusion masking.

In addition, great use is made in i.c. manufacture of current mirrors of one kind or another. These are circuit arrangements in which the output limb looks and behaves like a conventional high-impedance constant-current source, but with an output current controlled by an input current fed into its other limb from some external source. The output current then mimics or mirrors the input current. I have shown three of the more commonly used types in Fig.4†. The popularity of this type of circuit element in i.c. manufac-

\*Linsley Hood, J. L., *Electronic Engineering*, March 1967. (Letters).

ture arises from the fact that resistors and capacitors are inconvenient to construct in any large values, whereas transistors and diodes are easy. Moreover, if a current mirror is used as a load, an improvement in gain can be won.

This allows, for example, better operation of an input long-tailed pair wherein the loss of gain due to the normal halving of the  $g_m$  of the input devices is recovered together with an improved equivalence of gain between the two inputs of the long-tailed pair.

The operation of this type of circuit, taking for example the simplest arrangement of Fig.4a, hinges on the fact that if a transistor is forward biased so that it passes a certain collector current, the voltage across its base-emitter junction will then be precisely that which is required to cause

†Davidse., J., *Integration of Analogue Electronic Circuits*. Academic Press.


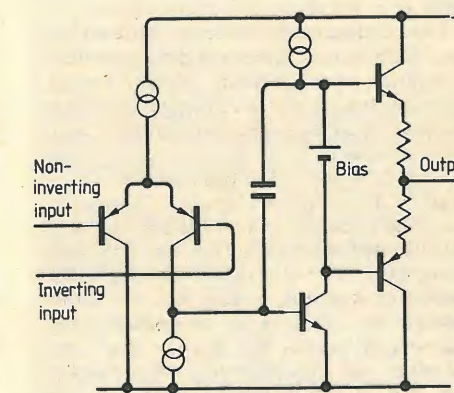


Fig. 1. Simplified input circuit operates as p-n-p long-tailed pair but in reality input devices are n.p.n.

Fig.2. Because of difficulty in fabricating high-gain p-n-p transistors input arrangement uses n-p-n types in modified cascode circuit.

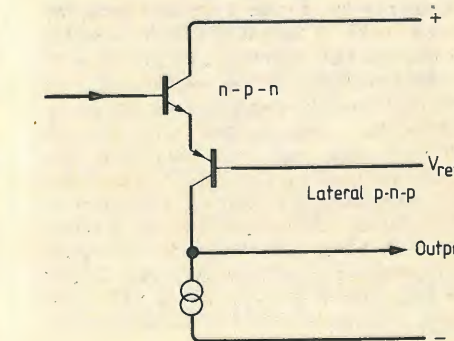

## Why look inside?

There are three ways in which a better understanding of the internal design of linear and quasi-linear integrated circuits can help the engineer: more satisfactory performance of circuits following from a greater appreciation of their strengths and limitations; possible use of accessible internal circuitry in unusual applications (a rich hunting ground in some of the more advanced units); and as an encyclopaedia of ingenious circuit design techniques, worked out by some of the most competent and resourceful design engineers.

Choice of the 741 as the starting point for this series stems mainly from a feeling that it was this i.c. more than any other which was responsible for the reconciliation of linear circuit engineers to the idea that most of the circuit functions they had

implemented using discrete components could be done by integrated circuits, with improvements in simplicity and cost effectiveness.

In spite of all its limitations, in gain and phase-shift, slew rate and input bias current demand, there are many applications in which the 741 gives excellent service. This applies in audio and medium frequency applications so long as the associated circuitry is designed with an eye to its strengths and limitations. In addition there are a vast number of other circuit usages in which the very high d.c. and l.f. gain of this i.c., coupled with its good rejection of supply line voltage fluctuations and its ability to operate with input d.c. levels almost anywhere between the limits imposed by its supply voltage lines, make the life of the linear circuit engineer much simpler than it was some 15 years ago.



an identical transistor (such as one diffused at the same time on the same chip and having the same junction area) to pass the same current. This is not strictly true in practice because the input current will be greater by two lots of base current. However, if this was important, the mask used in the diffusion process could cause  $Tr_2$  to be slightly larger than  $Tr_1$ . The circuits of Fig.4b and 4c minimize this error. My own shorthand symbol for the current mirror configuration is shown beneath, and I have used this in subsequent drawings.

In the full circuit of the input stage, shown in slightly simplified form in Fig.5, a three-transistor current mirror of the type shown in Fig.4b is used as the load for the input long-tailed pair, and an ingenious combination of two simpler (4a type) current mirrors, transistors 8 and 9 and 10 and 11, is used to stabilize the operating currents of the input devices. The way this works is by means of a d.c. negative feedback loop. If the total current of  $Tr_1$  and  $Tr_2$ , which should not contain any signal components, tends to increase, then the current output of the mirror  $Tr_8, Tr_9$  will also try to increase. However, this is effectively fed from a constant-current source (the output of the current mirror formed by  $Tr_{10}$  and  $Tr_{11}$ ) so the only thing which can happen is for the base voltage on the p-n-p transistors  $Tr_3$  and  $Tr_4$  to become more positive, which reduces the throughput current of the input stage because it effectively reduces the forward bias on the input transistors at the same time.

The interaction of these current mirrors also operates to minimize the magnitude of any unbalance currents in the input stage, which improves its symmetry, while simultaneously acting to lessen the extent of any breakthrough of signal components from the supply lines.

The second class-A amplifier stage and output stage, as shown in Fig.1, is of conventional form — the traditional high-gain small-signal amplifier followed by unity-gain power output stage, as spelled out so many years ago in this journal by Tobey and Dinsdale. High-frequency loop stabilization is achieved by the simple and effective expedient so common in early "hi-fi" amplifier circuits of a capacitor between collector and base, as shown. This leads to a few avoidable limitations which are discussed later.

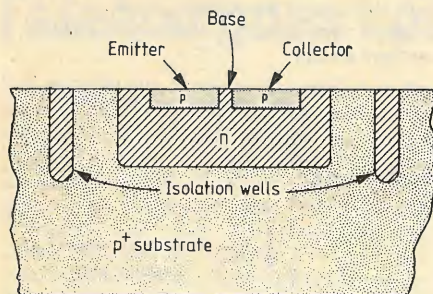


Fig.3. Lateral type of p-n-p transistor, though robust, has low value of  $h_{FE}$ , generally from 5 to 25.

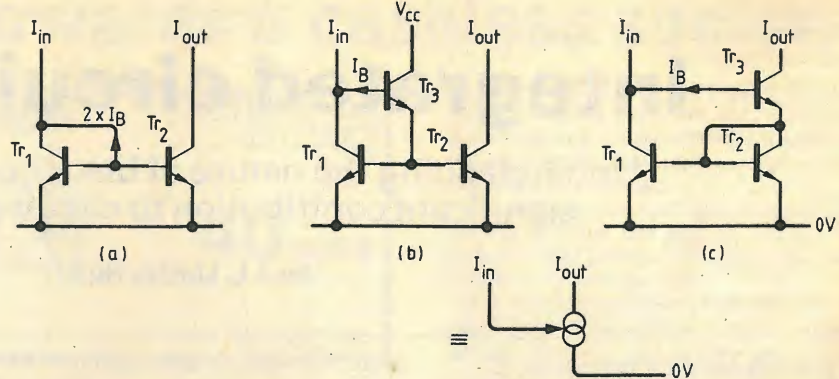


Fig.4. Output current mimics input current in these current mirror variations, all much more easily integrated than resistors and capacitors.

As shown, the output stage would have no protection against damage due to output short circuits. This is accomplished by the use of a pair of n-p-n transistors (the preferred type), as shown in the more complete diagram of Fig.6, one of which is connected across the emitter resistor of  $Tr_{14}$ , and will take the current from the input to this if the voltage drop across this resistor exceeds its own base turn-on voltage, and the other ( $Tr_{22}$ ) which acts in the same way in respect of the Darlington-pair class A amplifier stage  $Tr_{16}, Tr_{17}$ . The output stage forward bias is provided conventionally by an "amplified diode"  $Tr_{21}$  to give a quiescent current in class AB operation of about 1.5mA.

The final circuit of the complete i.c. is shown in Fig.7. I have actually shown that used by National Semiconductor, but all of the commercial 741s use a closely similar structure. In this, the only item not covered so far is the provision for offsetting inadvertent d.c. error at the output. This is done by putting a pair of resistors in the emitter leads of the current mirror used as the load for the input stage. If one or other of these is reduced relative to that in the other limb the current in that limb for balance will need to be greater; which calls for a change in input potential for that input device to maintain *status quo*. As this will not happen normally, the result of the adjustment will be to provide an output voltage shift equivalent to the stage gain multiplied by the required input offset. This provides a convenient means for obtaining a small shift in the output d.c. level, with minimal interference in the performance of the i.c. as a whole.

**Performance**

The d.c. and low-frequency voltage gain given by this circuit is very high — in excess of 50,000, with typical values of the order of 200,000. However, the presence of the h.f. stabilizing capacitor has a massive effect on the a.c. performance at frequencies higher than a few hertz, with the gain decreasing with frequency beyond some 5 to 10Hz at a rate of 6dB/octave.

A typical gain and phase-shift graph is shown in Fig.8.


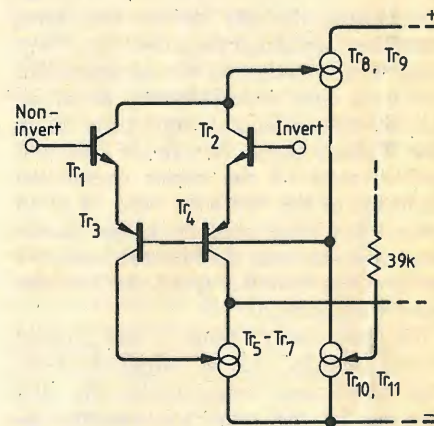


Fig.5. As well as a current mirror for the tail, type (b) in Fig.4, two (a)-types stabilize operating currents of the input transistors by d.c. negative feedback onto the base of  $Tr_3, Tr_4$ .

Fig.6. To provide short-circuit protection,  $Tr_{15}$  passes current from the input if the emitter resistor drop exceeds base turn-on voltage.  $Tr_{22}$  acts in a similar way for the Darlington pair.

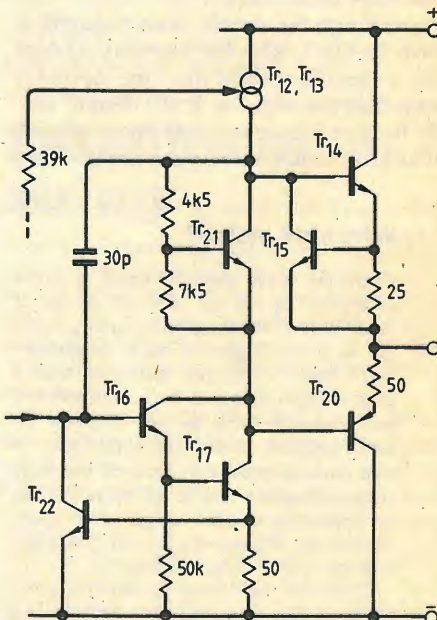

An examination of this shows two important features. There is a significant additional phase error beyond 300kHz, which implies the presence of one or more

phase-lag inducing components within the i.c. having a pole at some few MHz. This is the reason why the unity-gain point for adequate unity-gain stability in a feedback configuration cannot be made much higher than 1MHz. And following upon this, the available open-loop gain at the upper end of the audio band, say 20kHz, is only of the order of 50.

Unless, therefore, the gain requirements of an audio amplifier stage using a 741 are kept deliberately low, neither the amplitude response and phase linearity, nor the harmonic distortion characteristics of the amplifier stage, are likely to be satisfactory in the context of contemporary expectations for "hi-fi" equipment. Fortunately there are now third-generation operational amplifiers, such as the Texas Instruments TL071 series, which offer substantial improvements over the performance of the 741-type i.c. in those regions which are of importance to the audio engineer, and I propose to examine this i.c. later in this series.

The other features inherent in the design of the 741 which must be borne in mind in its use if results are to be satisfactory are those which concern the input long-tailed pair of bipolar transistors and the effect of the h.f. compensation capacitor on the transient performance. Taking the first of these, the design of the input stage leads to a combined collector current for the long-tailed pair of around 25 microamperes. Assuming a current gain of 100 for the input devices, the necessary forward bias current for 25°C operation of the circuit will be 0.1  $\mu$ A for each input, and this current must be supplied through any resistive circuit components in the input paths. While an output d.c. offset can be minimized by making sure that the total resistance value in each input circuit through which these bias currents must flow is the same (those components through which currents do not flow are unimportant in this calculation), it must be remembered that these currents increase significantly with temperature, and that the internal matching of the input devices may not hold over this range. For this reason, the total d.c. gain of the circuit and the amount of output d.c. offset which is tolerable must be considered when its circuit environment is being formulated, along with the temperature range over which it is to operate.

The second limitation of this i.c., that due to the nature of the internal h.f. compensation, is a rigid upper limit on the voltage slew rate which can be achieved at the output, around 0.5V/ $\mu$ s. If a composite signal is applied to the input which contains components calling for a greater rate of change in output voltage than this, the total composite signal will be lost while the output moves from one instantaneous d.c. level to another, at the maximum rate possible. This self-evident fact applies to all amplifiers which are slew-rate limited, including some in the "hi-fi" field. It is, I think, a sad commentary on the state of our art that a fact which is so simple to comprehend and can be stated so simply, can be used as the basis for a whole series

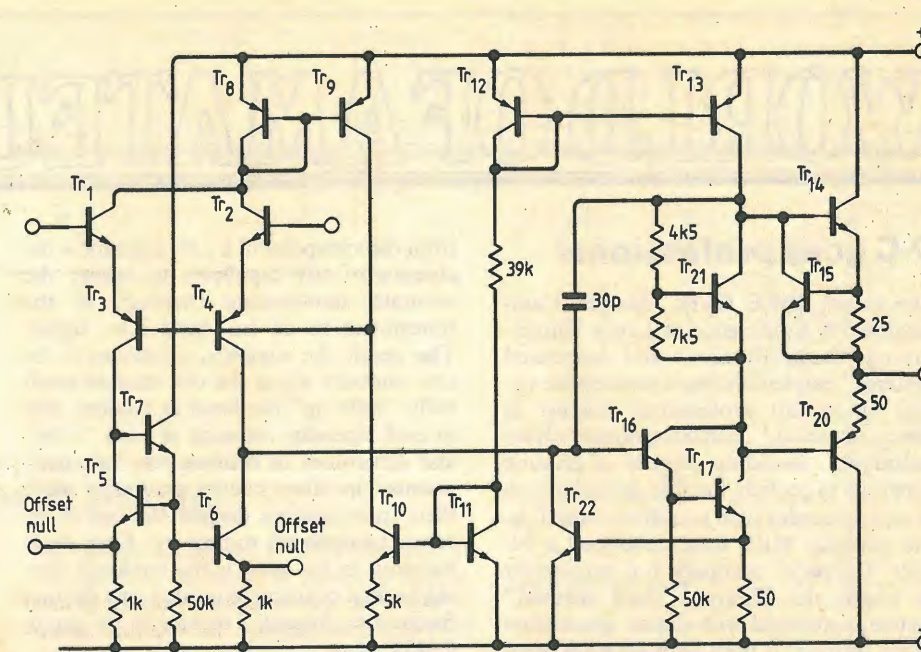


Fig.7. Complete circuit shows arrangement for offsetting d.c. error in the output. Reducing value of appropriate emitter resistor in the input stage produces an output voltage shift equivalent to gain  $\times$  input offset.

of technical papers aimed at proving the superiority of one or other commercial product.

To live within this limitation, it is necessary to ensure in all cases where slew-rate limited output saturation is important — and not all applications would be influenced by this — that the maximum rate of change of voltage in any input signal does not approach the output slew-rate divided by the effective a.c. gain.

There are now a large number of more recently designed and more expensive third generation operational amplifiers, in which both the small-signal bandwidth and slewing rate are much greater (by a factor of ten or more) than is the case for the 741. In some of these, such as the TI TL071 and the RCA CA3140 types, the input bias requirements have been reduced to a level which is so low that the choice of input resistance values can be determined solely by other circuit requirements.

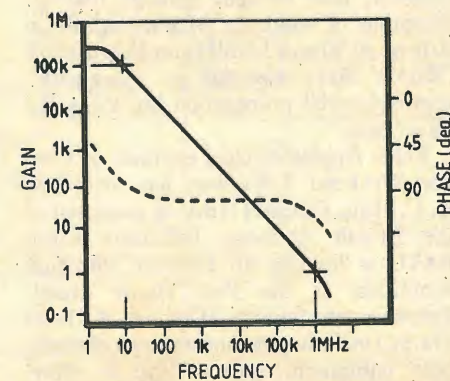


Fig.8. Frequency response shows phase error beyond 300kHz which limits unity-gain point to around 1MHz. Low open-loop gain at 20kHz limits usefulness in hi-fi applications.

**FREE WITH THIS ISSUE**

**Extra-terrestrial relays**

In October 1945 an article by a new author, a man named Arthur C. Clarke, appeared in *Wireless World*. At first glance, the subject of the article seemed to belong more to a science fiction periodical than to a technical journal like *Wireless World*; indeed, Mr Clarke subsequently became one of the best-known authors of science fiction. The second and succeeding readings, however, showed that what Mr Clarke had to say was sound sense. Here was nothing less than a scheme to use artificial geostationary earth satellites as broadcasting and communications platforms.

As everyone knows, space is now thick with satellites of all descriptions — there are 110 in geosynchronous orbit — but in 1945 it needed a great deal of thought to be sure that, by publishing such an article, *WW* would not be made to look foolish.

There is currently a crescendo of activity and speculation on the use of satellites for television and data communication, and readers might like to see how it all started. This month, therefore, we have included a reprint of the original article as an insert in those issues distributed in the UK. It was not possible to do this for overseas readers, but if anyone abroad would like a copy, they need only send a stamped, addressed envelope to *Wireless World*, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS, whereupon it will be sent off immediately.

# WORLD OF AMATEUR RADIO

## D-C goes professional

The recent IERE Clerk Maxwell Commemorative Conference at Leeds University on "Radio Receivers and Associated Systems" emphasised the considerable degree of current professional interest in direct-conversion (homodyne/synchrodyne) techniques, including the use of phasing networks to provide flexible demodulation of various modes such as narrow-band f.m. For example MEL have developed a 20-watt "Callpack" manpack h.f. transceiver in which the Weaver "third method" system, combined with digital quadrature phase shifting, is used both for s.s.b. generation and demodulation. Similarly, I.A.W. Vance, G3WMS and a team at STL have further developed their integrated-circuit n.b.f.m. d-c receiver to minimize the effects of oscillator phase-noise by means of what they term an "amplitude-normalized sine-cosine demodulator" and expect to see widespread use of this class of (mobile) receiver in the near future since it permits almost the complete receiver to be put on a chip. Philips Research Laboratories have been investigating the use of surface acoustic wave (s.a.w.) resonators to provide fixed-tuned d-c v.h.f. paging receivers suitable for the British Telecom National Paging System, the s.a.w. resonators being used to provide both a selective input filter and for oscillator frequency control at a fraction of the cost of using quartz crystals.

Although homodyne techniques date back to the 1920s, it seems fair to claim that much of the current professional interest stems from the work of J. P. Costas, W2CRR of General Electric (US) in the 1950s followed by J. R. White, W2WBI, K. Spaargaren, PAOKSB and Wes Hayward, W7Z01 plus a whole decade of active amateur experimentation with simple direct-conversion techniques.

## Vintage c.w. equipment?

Bob Locher, W9KNI writing in *Ham Radio* suggests that amateur h.f. equipment reached its operating zenith in the mid-1950s in the form of such equipment as the Collins 75A-4 receiver and the same firm's KWS-1 transmitter. He pinpoints what he regards as a subsequent decline in overall performance as starting with the general introduction of h.f. transceivers, following the success of the Collins KWM-1 in the late 1950s, due to the economic advantages and size reduction that was possible by combining both transmitter and receiver into a single compact unit.

His main complaint with the current generation of factory-built equipment

from the viewpoint of a c.w. operator is the absence of any capability to ensure the accurate zero-beating (netting) of the transmitter to an incoming c.w. signal. The result, he suggests, continues to be c.w. contacts where the two stations gradually "walk up" the band in tandem, due to each operator retuning at each "over" and difficulties in competitive "pile-ups" because operators cannot accurately place their transmissions despite the use of receiver incremental tuning etc. Even more harmful, in his eyes, is the tendency during normal contacts to occupy two distinct frequency channels, separated by up to 0.5kHz or so.

There seems to be no easy solution to this problem, which today exists to some degree even where separate receivers and transmitters are used. The recent high-cost Collins h.f. transceiver type KWM380 does include a fairly simple means of minimizing the problem and ensuring that the offset between the transmitted and received frequency is exactly equal to the frequency of the audio c.w. monitor. Even better, Bob Locher adds, would be to make variable, with perfect tracking, both the frequency of the c.w. monitor and the offset differential, so that the audio monitor only could be keyed and then adjusted to zero beat precisely the incoming signals.

Many c.w. operators would agree that current h.f. equipment is not ideal; my own pet annoyance is the frequent absence of the ability to switch off the a.g.c. system.

## Here and there

Very high levels of solar flare activity were recorded around the end of July, resulting in disturbed conditions on the h.f. bands and one of the most pronounced periods of auroral activity ever recorded in Europe, with stations as far away as Moscow being heard in the UK on 144MHz. It is, however, now thought unlikely that the reception of southern African signals in Athens on 50 and 144MHz on February 16 (WoAR May) was due to "long-path" transequatorial propagation but along the direct path.

Roger Appleton, chief engineer of London Weekend Television, has succeeded R. C. Hills, G3HRH (IBA) as president of the British Amateur Television Club. BATC is holding an amateur television exhibition at the Post House Hotel, Leicester on Sunday, October 4 (from 11a.m.) including demonstrations of members' equipment, narrow-band tv, slow-scan tv and F. J. ("Dud") Charman, G6CJ's "aerial circus" (on video tape).

The FCC is tightening up on its "waivers" procedure for home computers, which are providing a severe source of

radio-frequency interference (r.f.i.). Test procedures and maximum permitted levels have been set for both radiated and mains-borne field strengths. These regulations are more severe than those for large professional computers since domestic models are considered more likely to be located close to television and radio receivers. Until recently a number of "waivers" to the regulations have been authorised to give manufacturers time to modify designs.

The Amsat Phase 3B amateur radio satellite is now expected to be carried on the same Ariane launch vehicle as the European Communications Satellite (ECS) now scheduled for launch on an unspecified date between June and October 1982.

ARRL are investigating a number of cases where bogus or "altered" QSL cards have been submitted by amateurs for the DXCC listing. The suspect cards include a number for contacts made (or claimed to have been made) with "expeditions" in the 1960s and 1970s. One amateur connected with past expeditions is alleged to have admitted that 20,000 bogus cards were printed and issued by his group alone.

## In brief

A new 70.12MHz solid-state beacon transmitter at ZB2VHF, Gibraltar has been well received in the UK and on July 19 several British amateurs made contact on 70MHz with ZB2BL Gibraltar, one of the very few European countries, apart from the UK, where 70MHz operation is permitted... RSGB's Senior Rose Bowl trophy for the 1981 Commonwealth Contest has gone to the Canadian amateur John Sluymer, VE60U with 480 contacts, 158 of them carrying bonus points... In a number of American states it is illegal to drive a car wearing headphones regardless of whether these block out road noises... Three Canadian amateurs have been experimenting with the use of the 10GHz band for mobile operation and have found it possible to make contacts over distances of up to about a mile despite screening from buildings and other vehicles... FCC has opened an enquiry into issuing permits to "advanced class" licence holders to experiment with spread-spectrum techniques in the 50, 144 and 220 MHz bands... In a policy statement, the RSGB has confirmed that it welcomes c.b. provided that it is suitably regulated; will continue to emphasize the differences between c.b. and amateur radio; is prepared to support low-power f.m. on 27MHz with officially-approved equipment; welcomes the 934MHz allocation; and "will do whatever is within its power to prevent c.b. operation within any amateur bands."

PAT HAWKER, G3VA

# CIRCUIT IDEAS



## Linear power-amp offers high stability


Although many amplifiers claim good damping factors, speaker resonance often affects the input stages, even with low-impedance cables. This amplifier uses a novel output stage with control transistors connected as quasi-emitter-followers for high linearity. Slave devices provide a voltage to the control transistors about halfway between the output and the supplies, which helps to share the dissipation and reduce the possibility of secondary breakdown. The amplifier provides a 25V/ $\mu$ s slew rate and is unconditionally stable into any load down to 2 $\Omega$ . Input and output supply rails

should be connected at the power supply to eliminate the need for local decoupling. A 3A power supply at up to  $\pm 50V$  is recommended for a maximum output of 60W.

Fig. 2 shows an alternative output configuration which uses slave transistors to dump current into a low power output stage such as a class A or v.f.e.t. as shown. In this circuit most of the dissipation is in the slave transistors.

Q. Rice  
New Malden  
Surrey

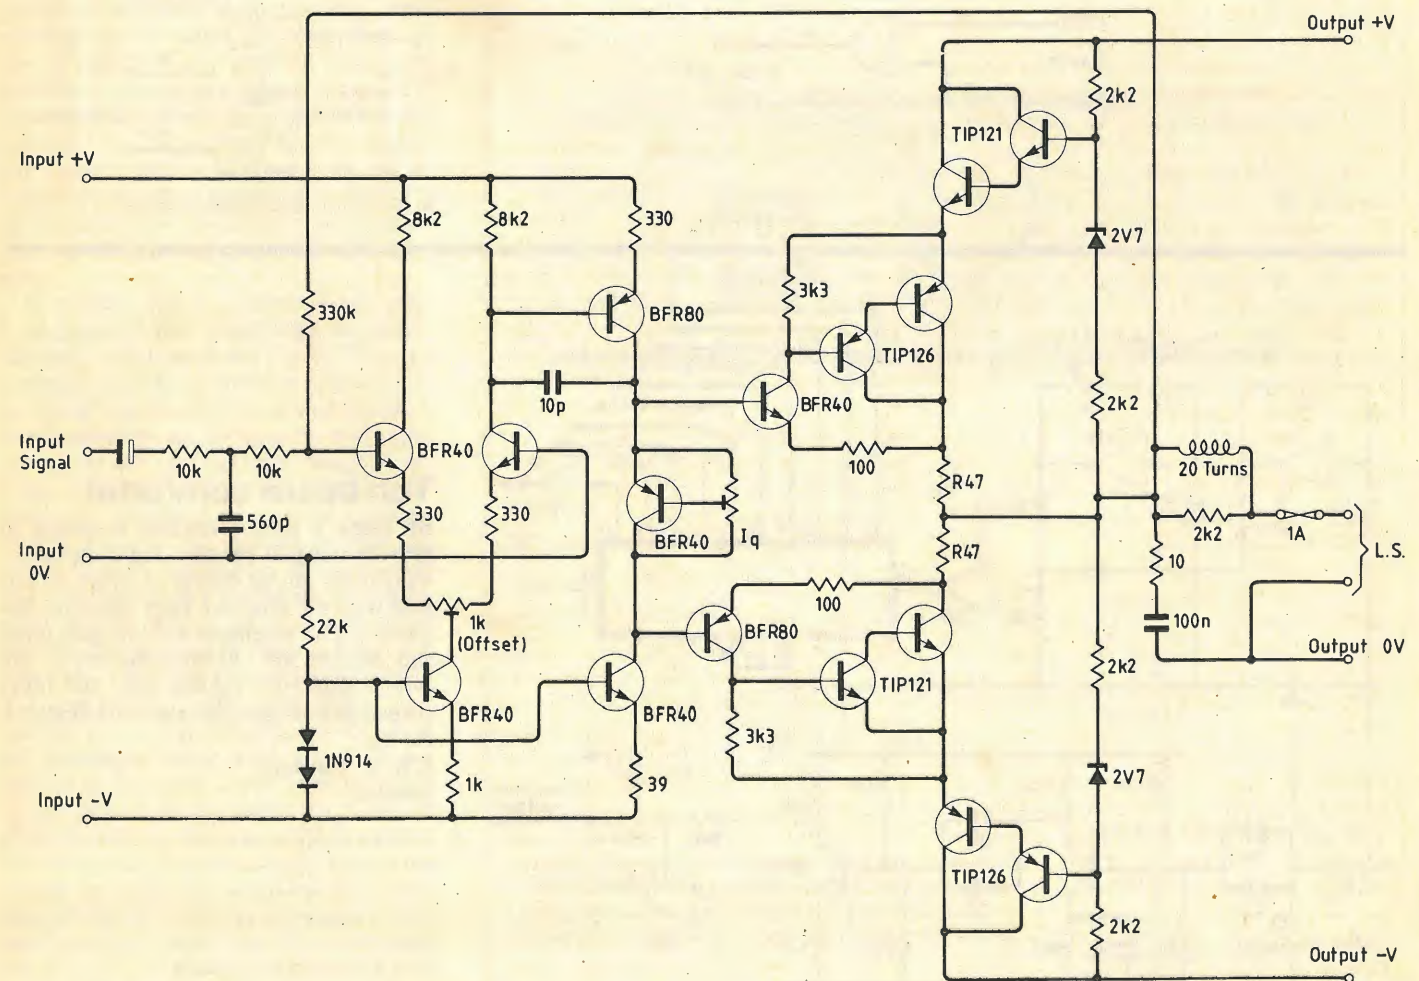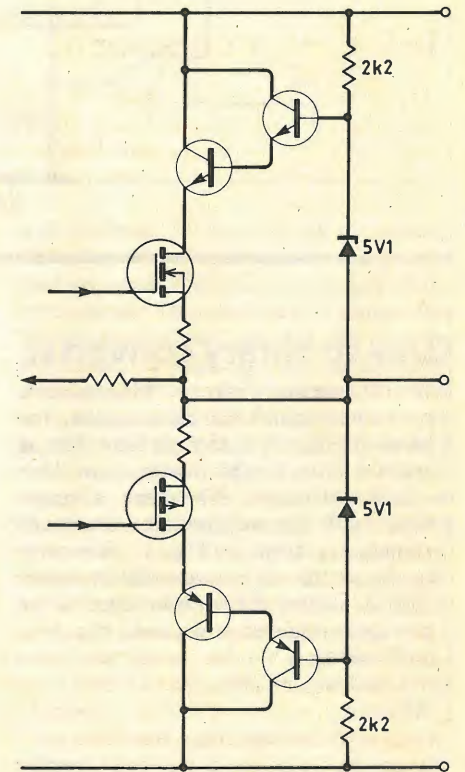

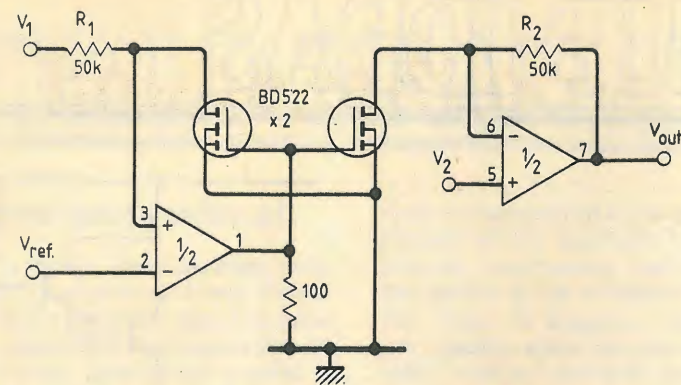

### Analogue multiplier

A simple high-impedance analogue multiplier can be constructed using two v.m.o.s. transistors and an op-amp to simulate a resistor which is proportional to  $R_1 V_{ref} / (V_1 - V_{ref})$ . This circuit represents a non-inverting amplifier whose output voltage is  $V_1 V_2 / V_{ref}$ .

K. Kraus  
Rokycany  
Czechoslovakia

### Gray to binary converter

When converting Gray to binary, each time a more significant bit is added, the relationship between the previous bits is inverted but the new bit has the same value in Gray and binary. Therefore, a single exclusive-OR gate will convert a Gray code to binary as shown in Fig. 1. For more bits, the circuit can be expanded as shown in Fig. 2. Converting from binary to Gray is also easily achieved as shown in Fig. 3.

J. J. Mouton  
East London  
S. Africa

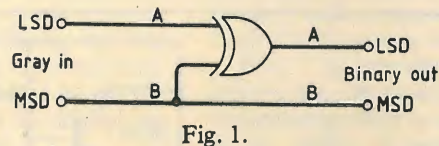


Fig. 1.

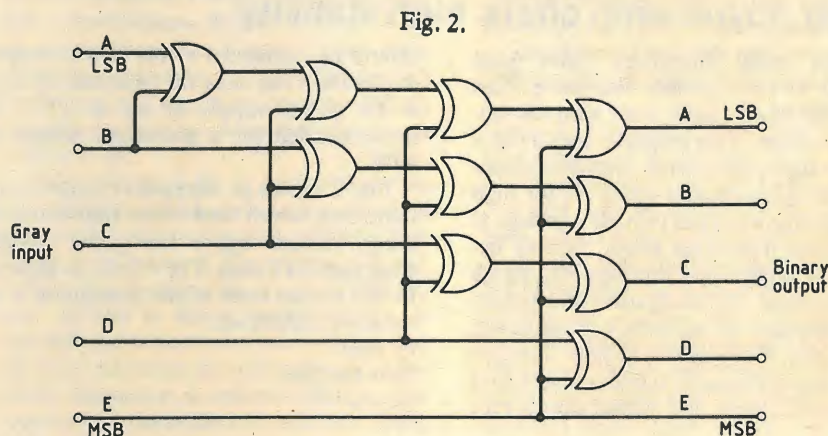


Fig. 2.


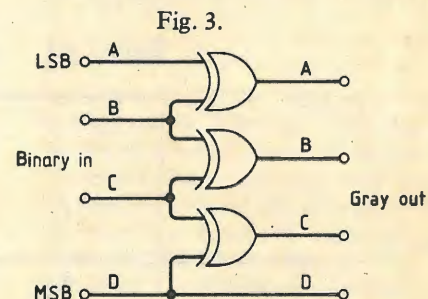


Fig. 3.

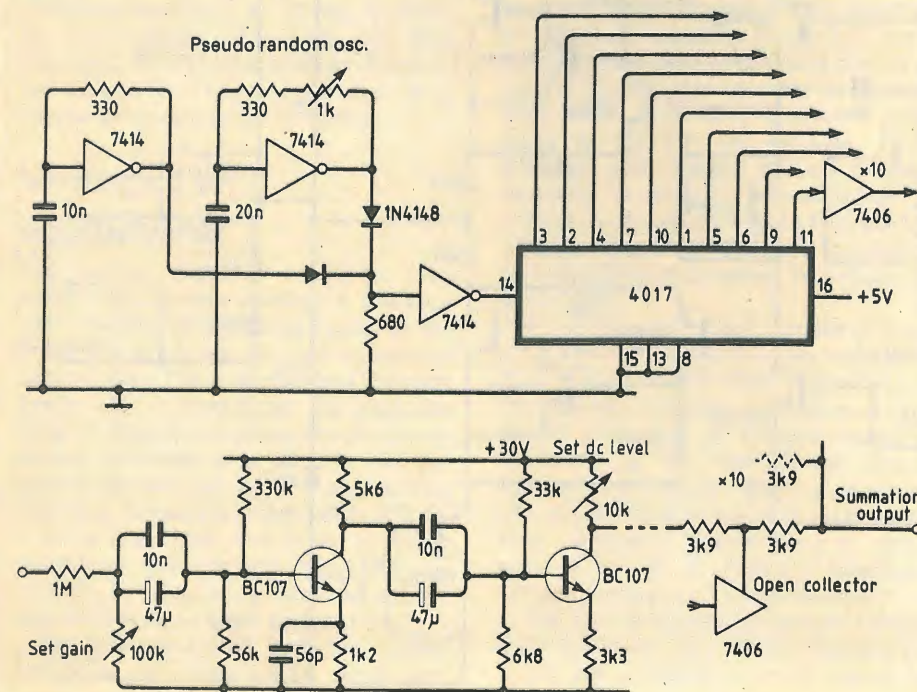

### Ten beam converter

By using a pseudo-random oscillator to provide unequal periods, ten oscilloscope waveforms can be displayed which do not lock with the timebase from the chop frequency. The amplifiers are low-gain types and require 30V. Open collectors in the 7406 switch the signals and the 10kΩ potentiometers position the waveforms on the c.r.t.

J. R. V. Hawkins  
London

# Quantifying amplifier sound

## Why can we distinguish amplifier sound in listening tests?

by Yoshimutsu Hirata, Waseda University, Tokyo

**An important problem still unsolved in audio is the correlation between subjective and objective quantities. But it is more important to answer the question of why we can distinguish "amplifier sound" from the sound of a loudspeaker.**

Audible differences of amplifiers are the inherent distortions, whatever they may be. The harmonic distortion of a high quality amplifier is usually less than 0.1%, while the distortion of a loudspeaker is more than 1%. In spite of this we can distinguish "amplifier sound" from the sound of a loudspeaker and point out differences in the quality of amplifiers. This implies that the distortions in amplifiers and loudspeakers differ in properties which cannot be expressed by the total harmonic distortion measurement.

It has been recognized that harmonic distortion generally does not give good correlation with subjective assessments of sound quality. To give an improved subjective agreement, several methods of measuring non-linear distortion have been proposed<sup>1</sup>. The gap between the subjective quantity and the total harmonic distortion measurement is explained to start with, viz. a musical sound and a sine-wave signal.


A musical sound involves many transient sounds whose waveforms are generally very complicated; see Fig. 1. What is a common feature in those waveforms? If anything is common in those waveforms, it is expressed by an asymmetric waveform having no d.c. component. Many waveforms have such properties: Fig. 2 (top) shows the waveform of a model transient sound,  $h(t)$ , which consists of half-sine waves a and b. Amplitudes of the positive and negative waves are different from each other and the area of the waveform above the zero axis is equal to the area below the zero axis. Thus, the asymmetric waveform  $h(t)$  has no d.c. component. Fig. 2 also shows a plot of the frequency spectrum of the waveform where  $S_1(f)$  and  $S_2(f)$  are spectra of impulses a and b respectively. At low frequencies the spectrum shows a 6 dB/octave slope. When an amplifier under test alters such a waveform, the area of the altered waveform above and below the zero axis will be different, in accordance with non-linearity in gain. This difference gives rise to a d.c. component, coupled with an increase of low-frequency components of

the waveform. The spectrum function of the altered waveform can be obtained mathematically by expressing the non-linearity in the form of an appropriate equation<sup>2</sup>.

Effects of several different non-linearities on the waveform and spectrum of the model signal are shown in Figs 3-7, where  $h_a(t)$  is the altered waveform,  $\Delta(t)$  the deviation from the waveform  $h(t)$ ,  $D_a(f)$  the spectrum of  $\Delta(t)$ ,  $S_a(f)$  the spectrum of  $h_a(t)$ , and so on. An s-type non-linearity of an amplifier gives rise to an increase in low-frequency components of the signal, caught as soft or 'glossy' in listening tests. A soft distortion as represented by an s-type non-linearity is sometimes preferred when the distortion is not too great. Clipping is not an operational non-linearity in the proper sense of the word, but the saturation of a system being overloaded. The effect of clipping on the spectrum is the increasing of both low and high-frequency components, which is audibly irritating

and disliked. In the case of a crossover distortion, the low-frequency component increases with decreasing amplitude of the input signal. This distortion is remarkable for low input signal levels. As an example of a dynamic distortion, take the distortion occasioned by a level compressor. For simplification, assume that the gain of a circuit is attenuated to reduce the amplitude of a positive pulse as in Fig. 6(a). In this case, the spectrum of the signal suffers heavy change, viz. the increasing and decreasing of low and high-frequency components. Unless the functioning of a level compressor and expander is ideal, a noise reduction system produces a similar distortion in an impulsive signal, which may be caught subjectively as somewhat dull or heavy by a listener.

As discussed, gain non-linearities in amplifiers give rise to a d.c. component coupled with an increase of low-frequency components of an impulsive signal. On the

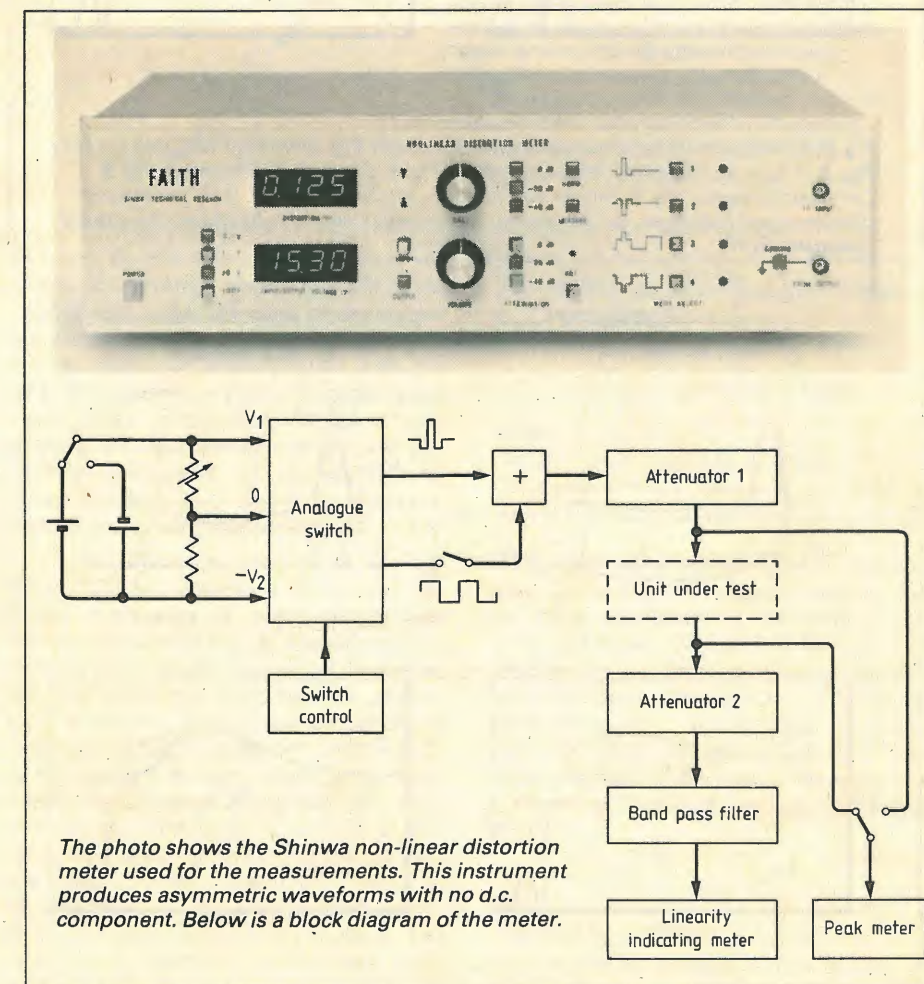

The photo shows the Shinwa non-linear distortion meter used for the measurements. This instrument produces asymmetric waveforms with no d.c. component. Below is a block diagram of the meter.

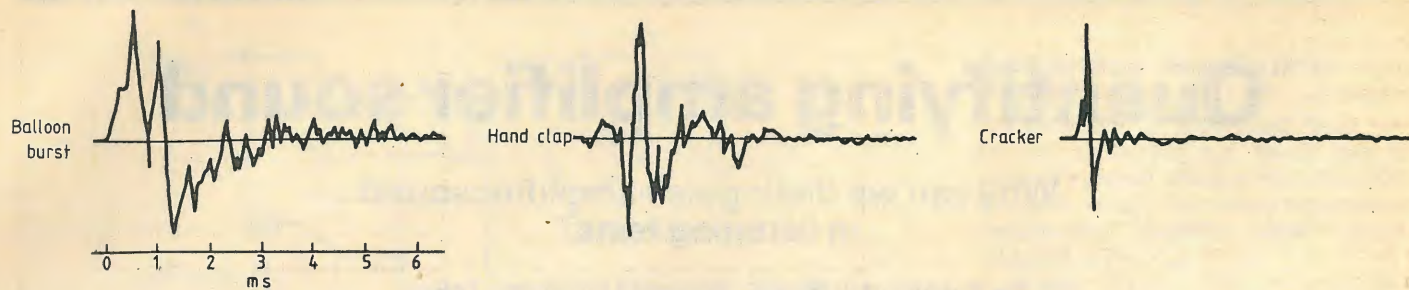


Fig. 1. Typical waveforms of transient sounds are asymmetric, with no d.c. component.

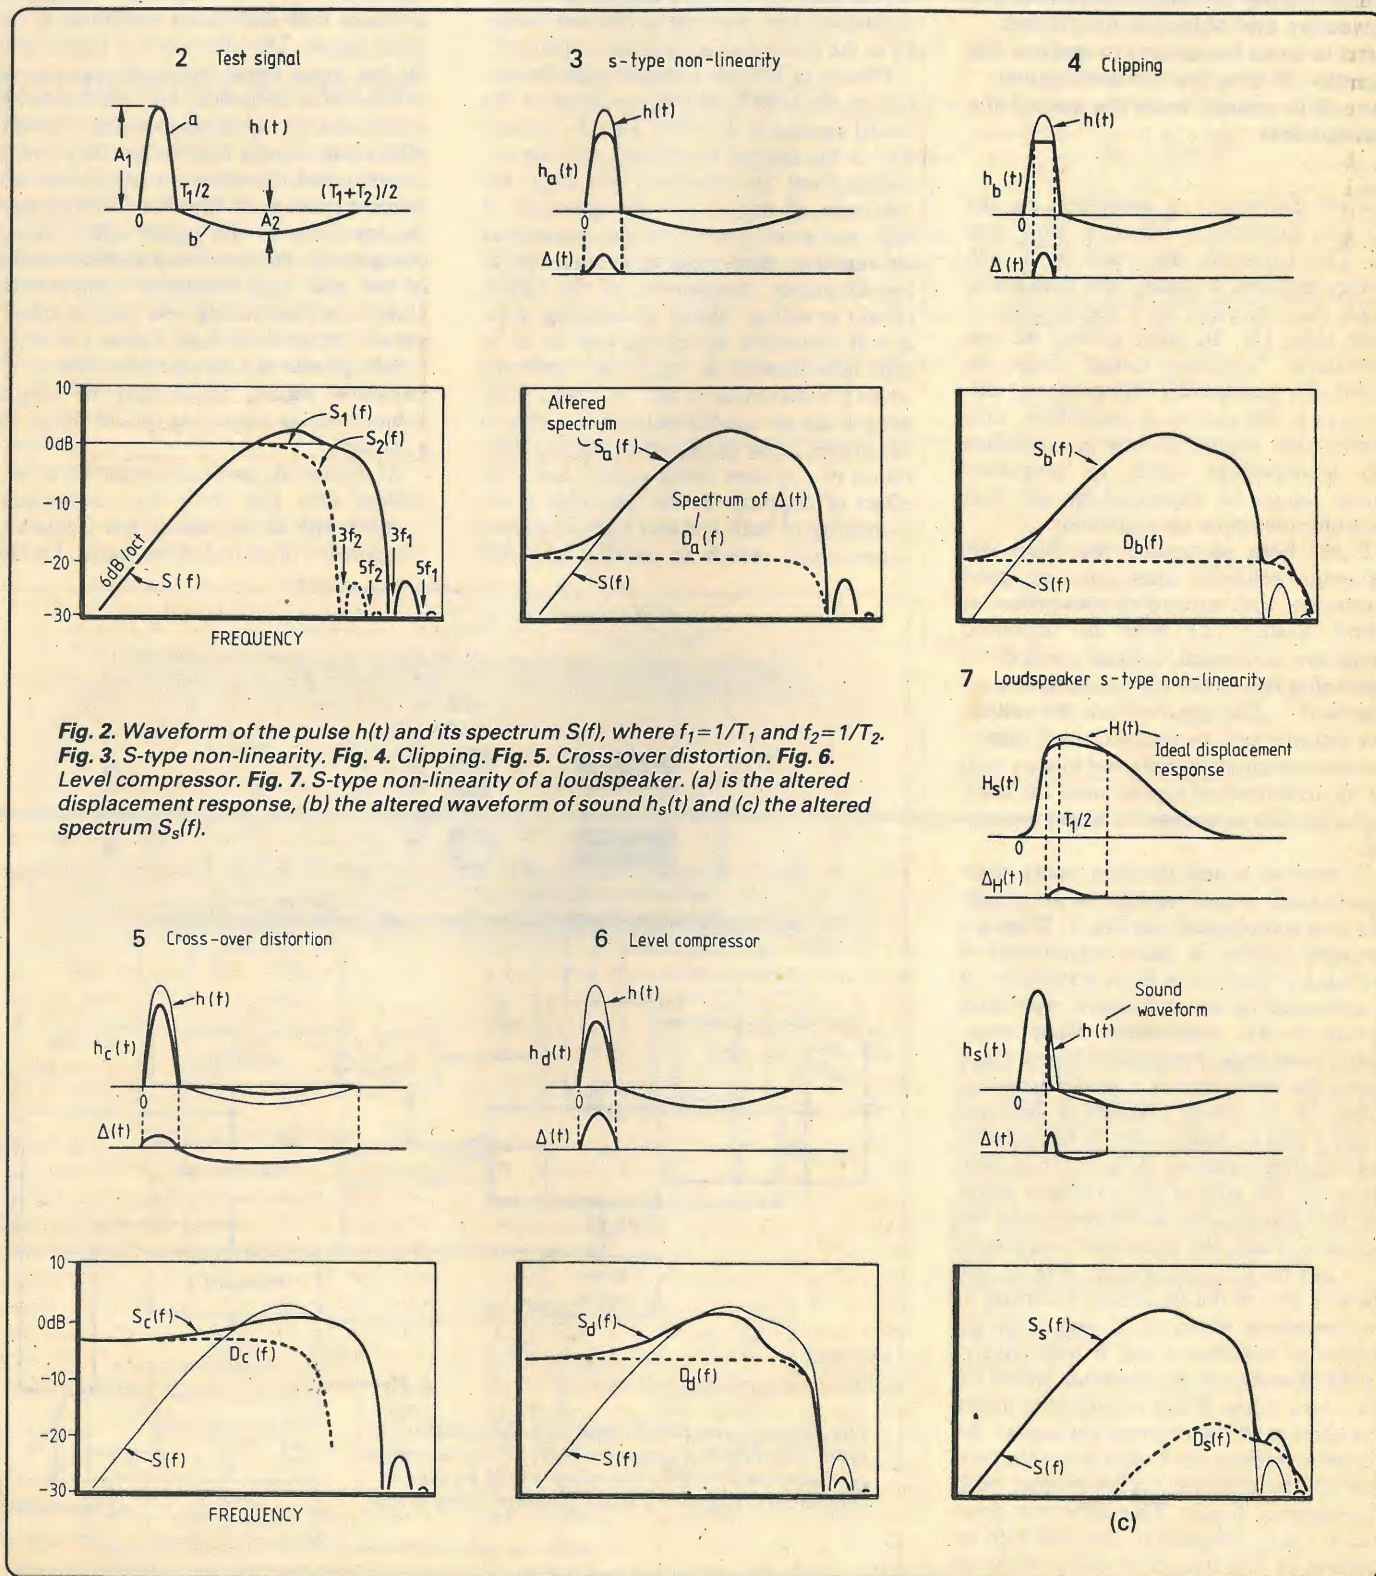


Fig. 2. Waveform of the pulse  $h(t)$  and its spectrum  $S(f)$ , where  $f_1=1/T_1$  and  $f_2=1/T_2$ . Fig. 3. S-type non-linearity. Fig. 4. Clipping. Fig. 5. Cross-over distortion. Fig. 6. Level compressor. Fig. 7. S-type non-linearity of a loudspeaker. (a) is the altered displacement response, (b) the altered waveform of sound  $h_s(t)$  and (c) the altered spectrum  $S_s(f)$ .

other hand the distortion in a loudspeaker does not, as a matter of course, give a d.c. component. As an example, consider the s-type non-linearity in the displacement response of a vibrating plate. To simplify an analysis, assume a sound pressure is in proportion to the velocity of a plate, viz. a sound is assumed to be radiated from an infinite plate. For a finite plate, the sound pressure of low-frequency components is proportional to the acceleration of the plate. The difference between the displacement response  $H_s(t)$  which is altered by the s-type non-linearity and the ideal response  $H(t)$  is expressed by  $\Delta_H(t)$ . As sound pressure is proportional to the velocity of an infinite plate, the sound distortion  $\Delta(t)$  is given by the derivative of  $\Delta_H(t)$  with respect to time. As shown in Fig. 7(c), the spectrum of  $\Delta t$  involves no d.c. component and few low-frequency components. Thus the distortion in a loudspeaker does not change the low-frequency component of an impulsive sound, which is in contrast with the case of the distortion in an amplifier. And this is the reason we can distinguish amplifier sound from the sound of a loudspeaker. This has been verified by experiments using a novel method for measuring non-linear distortion<sup>3</sup>.

Experimental method

The model of a transient sound used for the theoretical study consisted of two half-sine waves of different amplitudes and polarities. The model signal was such that it could distinguish distortion due to non-linearities as a change of spectrum, which is related with a subjective quantity. It is however not convenient to use the model signal for the measurement of an objective quantity, viz. the rate of distortion.

A new method of making non-linear distortion measurements uses composite rectangular pulses, as shown below. The area of the part of each test signal waveform above the zero axis is equal to the area below the zero axis, so these asymmetric test signals have no d.c. component.

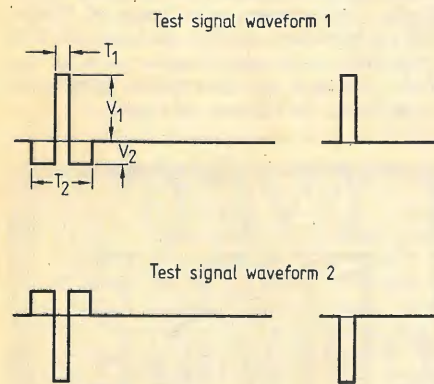


Fig. 8. These diagrams show non-linear distortion curves of three power amplifiers together with transfer function shapes. Reference power output is defined as  $V_1^2/2R$  where  $R$  is 8 ohms. Top left is for the Marantz SM7, top right for the Threshold 4000, bottom left the Amcron SA2 and bottom right the Meridian.

When an amplifier under test alters the applied test signal the areas of the altered waveform above and below the zero axis will be different in accordance with the gain non-linearity. This difference gives rise to a d.c. component coupled with an increase or decrease of certain low-frequency components of the test signal, either of which can indicate the degree of linearity of the amplifier under test.

The repetition frequency of the test signals is 220 Hz, chosen to lie between the higher harmonics of power-supply frequencies 50 and 60 Hz. At low frequencies the envelope of the test-signal spectrum has a 12 dB/octave slope and the component at 220 Hz, normalized to that of the reference signal, is 0.002 (-54 dB) which is the theoretical value in the absence of non-linear distortion. Thus the difference between the normalized component at 220 Hz of an altered test signal and the theoretical value of 0.002, indicates the value of non-linearity of an amplifier under test. When the gain non-linearity is static, i.e. when the i/o property is expressed by a single curve, the non-linear distortion  $D$

corresponds to the linearity deviation  $\Delta$ . The relationship is


$$D = |\Delta/V'_1 + 0.002| - 0.002$$

where  $V'_1 = V_1 + \Delta$ , which is nearly equal to  $V_1$  for  $\Delta \ll V_1$ . This gives  $D = \Delta/V'_1$  for  $\Delta/V'_1 \geq -0.002$  and  $D = -\Delta/V'_1 - 0.004$  for  $\Delta/V'_1 \leq -0.002$ .

The figure of  $D$  involving  $V_1$  indicates directly the form of gain non-linearity, i.e. an s-type non-linearity, cross-over distortion, and so on. (Notice that the figure of  $D$  given by the last equation corresponds with the figure given by  $D = \Delta/V^1$  which turns up at  $D = -0.002$ ). The lower limit of the  $D$  (%) axis is -0.2%. The block diagram of the measuring apparatus is shown under the photograph on the first page.

Results

One of the advantages of this method is that calibration of the test signal can be

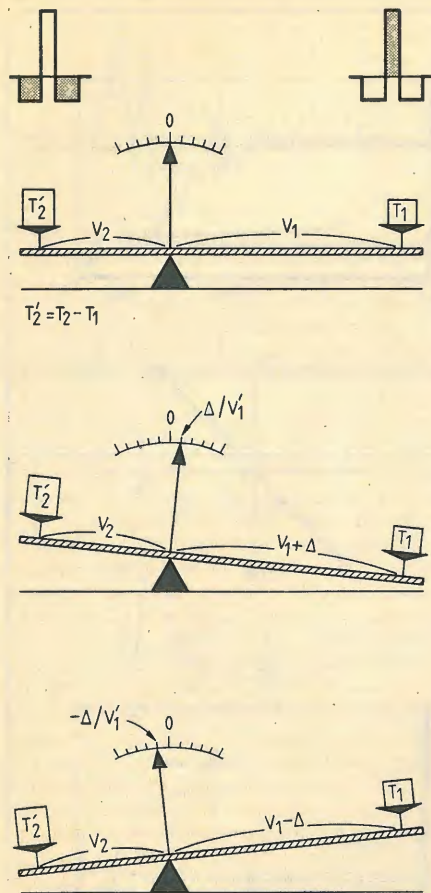

Beam in balance analogy tilts according to the increase ( $\Delta > 0$ ) or decrease ( $\Delta < 0$ ) of  $V_1$ .

done with a circuit connected at the output of the apparatus, which enables distortion to be measured in a large system such as a console. Fig. 8 shows measured distortion figures of commercial audio amplifiers with an  $8\Omega$  resistive load and the form of non-linearity given by the respective distortion figures. Rise and fall times of the test signal are about  $10\mu s/V$ . When there is a difference in slew-rate between build-up and fall of voltage amplification it gives rise to a d.c. component coupled with low-frequency components, and distortion figures for the first and second test signal will be shifted upward in the case of a larger build-up slew-rate, and vice versa. Such an example is shown in Fig. 7. Figures 9 and 10 show the distortion figures of noise reduction systems used in cassette tape recorders, where the input test signal was superimposed on a rectangular waveform which has no d.c. component. Although large distortions are due to the inherent non-linearity of recording media, it is shown that noise reduction increases the low frequency components.

To verify the fact that amplifier sound can be distinguished from the sound of a loudspeaker, non-linear distortion measurements were made using a loudspeaker. Fig. 11 shows the distortion figure of a high-quality audio amplifier, measured by using the sound reproduced from a loudspeaker connected to the amplifier output. The measurement was made in a low-noise

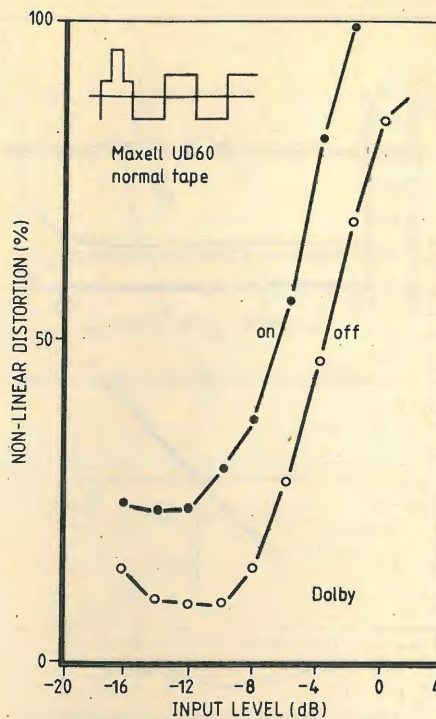


Fig. 9. The non-linear distortion graph of a noise reduction system in a cassette tape recorder using Dolby and Maxell UD60 (standard) tape.

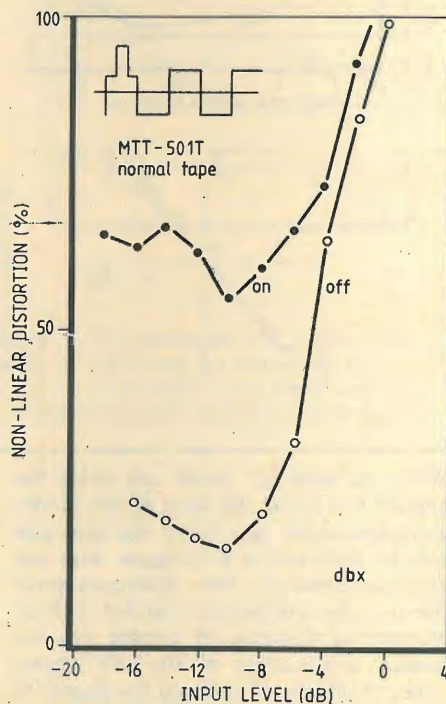


Fig. 10. As Fig. 9, but using dbx and MTT-501T cassette tape.

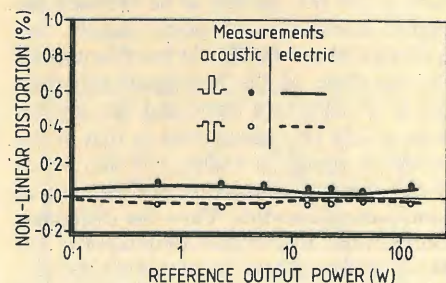


Fig. 11. Non-linear distortion of a Kenwood L-07 Mill power amplifier. Broken lines represent electric measurement and solid lines acoustic measurement.


room so that the component of 220Hz could be correctly measured. Care was taken to avoid the effect of non-linearity in the microphone and measuring amplifier. Fig. 11 also shows the distortion figures obtained by measuring the voltage across the voice coil of the loudspeaker. Evidently, the non-linear distortion of an amplifier can be distinguished from the distortion of a loudspeaker. So we can really distinguish amplifier sounds from the sound of loudspeakers objectively as well as subjectively.

References

1. H. H. Scott, Audible audio distortion, *Electronics*, vol. 18, 1945 no. 1, pp.126-131.
- J. K. Hilliard, Intermodulation testing, *Electronics*, vol. 19, 1946, no. 2, pp.123-127.
- W. Oliver, White noise loading of multichannel communication systems, *Electron. Eng.* vol. 37, 1965, pp. 714-717.
- S. Nikaido and T. Nitadori, Non-linear distortion measurement of audio systems, *EBU Rev.*, no. 131, 1972.
- M. Ojala and E. Leinonen, Possible methods for the measurement of transient intermodulation distortion, 53rd AES Convention, New York, 1976.
- R. A. Belcher, Audio non-linearity: an initial appraisal of a double comb-filter method of measurement, BBC Res. Dep. Rep. 1977/40.
- S. Takahashi and S. Tanaka, Method of measuring transient intermodulation distortion, 63rd AES Convention, Los Angeles, 1979.
2. Y. Hirata, Pulse response and transient non-linear distortion of audio instruments, *J. Acoust. Soc. Japan*, vol. 34, 1978 pp. 444-9.
3. Y. Hirata, M. Ueki, T. Kasuga and T. Kitamura, Non-linear distortion measurement using composite pulse waveform, 66th AES Convention, Los Angeles, 1980.

69x69mm flat-panel display

The first step towards production of a 69x69mm, 57,600 pixel flat-panel display has been made by Standard Telecommunication Laboratories in the form of a 36x36mm, 1,600 pixel prototype. The end product will be a liquid-crystal display only a few millimetres thick with built-in drive electronics and able to display, for instance, a full page of Prestel. STL, a subsidiary of STC, disclosed details of what they call the sub-miniature v.d.u. in New York recently at the International Symposium of the Society for Information Display.

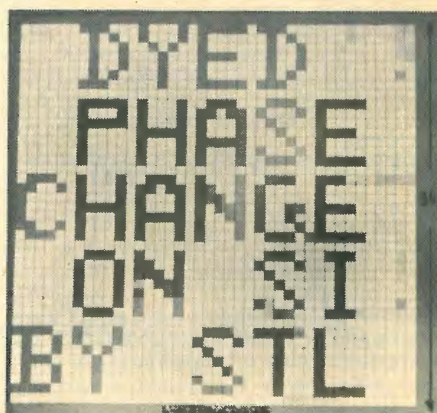

# LETTERS TO THE EDITOR

CITIZENS BAND

Mr Frost says in July letters that operators of illegal c.b. gear "have every reason to grumble at the expense of changing to the new system". I can think of a few other groups having "reason to grumble":

- housebreakers, forced by new lock designs to obtain a new set of lock picks;
- radio control aeromodellers, faced with a move to the 35MHz band;
- car and boat modellers, who have not been given a new band, but are left with one polluted by c.b.;
- hospital administrators, forced to buy new paging systems to avoid 27MHz c.b. interference - see the letter on page 2 of *Electronics Weekly*, May 13th, 1981.

After the publication of a letter in a local paper in which I contradicted inaccurate statements by a c.b. enthusiast, objects were thrown from a passing car at my house. For this reason, I would be grateful if you did not publish my name and address.

(Name and address supplied)

DECLINE OF THE PHILOSOPHICAL SPIRIT

The editorial of the July 1981 edition of *Wireless World* rightly draws attention to the impoverishment of science and philosophy by their artificial separation. It is therefore of great importance to consider what practical steps are available for us to remedy this unhappy situation. Fortunately, the words of the great scientists are full of practical advice on this. For example, Michael Faraday said "Here it is we are born, bred, and live, and yet we view things with an almost entire absence of wonder to ourselves respecting the way in which all this happens. So small, indeed, is our wonder that we are never taken by surprise". On a similar theme, Albert Einstein said "The fairest thing we can experience is the mysterious. It is the fundamental emotion which stands at the cradle of true art and true science. He who knows it not and can no longer wonder, no longer feels amazement, is as good as dead, a snuffed-out candle."

This wonder, which leads to 'natural philosophy', does not have to be acquired, it is there so obviously in the young child. It might well get covered over by the ideas described so well in the editorial and then a greyness appears to cover the physical world. It does seem, however, that it can be readily uncovered by the application of the scientific principles to our everyday experiences. To take a small example, on tuning a radio over its waveband, a large number of stations are heard. It does not take much reflection to appreciate that the radio is separating and manifesting what is all together in the room. The space in the room is pervaded not only by countless man-made electromagnetic signals, but also by the electromagnetic signals we call light from every body in the room, the magnetic and electric fields of the earth and beyond, the gravitational influence of every atom in the universe and so on. Such a reflection very easily turns into wonder.

As demonstrated so clearly by the great scientists, this emotional response is not a waste of time but "the cradle of true art and true

science". Their works show the ability to simplify and unify previously complicated and separate areas of scientific endeavour.

It is the duty of those involved in the education of the young in science and engineering subjects to uncover this 'fundamental emotion' in the students by what is said, more so by what is done in the laboratory, but most of all by the teacher's love of his subject. Perhaps in this practical way it is quite possible by our scientific activities to, as Plato put it, "create the spirit of philosophy, and raise up that which is unhappily allowed to fall down".

M. J. Cunningham,  
Manchester

WIRELESS WORLD 1911-1981

Congratulations on seventy years great service by *Wireless World* and *The Marconigraph*. As far as I can ascertain, the Technical Library operated by this company for its employees is the only library in Australia with a complete run from issue number 1 of *The Marconigraph* to date.

B. J. Simpson,  
Chief of Patents,  
Amalgamated Wireless (Australasia) Ltd

JAMES CLERK MAXWELL

Mr Wellard, in his article on Maxwell (May 1981) in my opinion spoiled an otherwise interesting article by some outrageously contentious statements which were unsubstantiated in the article and run completely counter to the present day knowledge of atomic and nuclear physics.

The mass ratio of electrons to protons is about 1:1820; but the charge ratio is exactly 1:1, but of opposite polarity. The body of experimental evidence for these ratios is extremely strong since the design of mass spectrometers, mass separators, synchro cyclotrons, electron beam systems (including c.r.t.s) and many others depend on an accurate knowledge of the properties of electrons and protons.

His article implies that hydrogen atoms and molecules are not electrically neutral. The implications of this are very far reaching, but as far as I am aware, having had considerable experience of ion sources, electron beams and hydrogen gas handling, there is not a shred of evidence to support the implication of non neutrality.

Furthermore the statement about the neutron... 'this non-existent particle'... is also highly contentious. How do nuclear reactors work if neutrons are non-existent? Why do nuclear physicists refer to thermal neutrons and fast neutrons, and the resulting reactor types, thermal and fast-breeder reactors when, as Mr Wellard asserts, neutrons do not exist? Again, neutron radiography is an extremely useful alternative to X-raying for non-destructive testing of various engineering parts. How does this work if there are no neutrons?

It is difficult to follow Mr Wellard's logic in the article when such unsupported outrageous statements are made. If he is keeping some new

important experimental data from the world then he should publish it properly in some form where it can be scrutinised and his experiments repeated, and so be tested for their universality.

If, on the other hand, he has no basis for his remarks, except that he does not like the idea of electrons and protons having an equal magnitude of charge, or does not like the idea of neutrons, then it is just too bad: they are an observational fact. Many people did not like the idea of a spherical earth or a helio-centric solar system, but both are observational facts, around which valid models can be constructed. We may not know what a neutron is, since we cannot handle it in the way we can handle familiar everyday things, but its properties can be quantified (e.g. mass) and used for prediction purposes.

Referring now to a letter concerning Mr Wellard's article by H. Aspden, he states that in 1980 experimental 'proof' that the aether can assert a force was reported in *Nature*. Not many of your readers would have access to the article named in *Nature*, which reports some interesting experimental results, as yet uncorroborated, which may be evidence for an aether (or something) but is not proof as yet. Mr Aspden is a very impressionable person if he considers one experiment to be proof. The experimental technique will have to be very carefully looked at to ensure that no other phenomenon was responsible for the effects measured, and the test repeated elsewhere with another apparatus to confirm the results. Only then can it be asserted that there is enough evidence to provisionally confirm the implication of an aether.

B. J. C. Burrows,  
Benson,  
Oxford

The author replies:

The question of the equivalence of electrons, protons and the hydrogen atom was answered in my reply to T. de Limelette (August letters). The equation does not satisfy Maxwell's test and is therefore absurd. The neutron is one half cycle of an electromagnetic wave; the anti-neutron is the other half cycle. They are mathematical myths. The infinite acceleration of an action-at-a-distance particle generates an infinite amount of energy. I assume from the third paragraph of Mr Burrows' letter that he is an experimental physicist. If he finds his working model of a particle more useful in his work than the working model of a wave, he should carry on as usual; he has no sensible alternative at present. The passing of an examination requires the unconditional acceptance of a working model and its associated equations. I am suggesting that the working model he was forced to accept was based on the wrong analogy. I am not suggesting that he or any other member of the scientific community is in any way responsible for the constrictions imposed by the mathematical extremism of Lorenz or the entrepreneurial skill of Einstein. The flaw in any idea or belief is its dogma; identify the dogma and you identify the flaw. As far as I know, a physicist is no different from any other human being infused with an extreme idea. Mr Burrows writes in plain English and must be capable of plain and open thinking.

Mr Burrows is unfair and unwise to include an innocent bystander in his deprecations. He

asks whether I am withholding new important experimental data from the world. The answer is no. I would have thought that every experiment with an electromagnetic wave proved the presence of a medium. Does he know the whereabouts of another Einstein withholding experimental data that proves otherwise? Two books by Dr Aspden received a favourable mention in Dr Essen's attack on Relativity (October 1978 issue). Both gentlemen are Flat Earthers. Now that the memory of the late Professor Dingle has joined them, Mr Burrows is wasting his time seconding me to such an exclusive club.

To prove just how exclusive this club is, I have taken a look at Einstein's famous equation of energy,  $E=mc^2$ . The dimensions of work or energy are  $ML^2/T^2$ , the work done by a unit of force ( $ML/T^2$ ), accelerating through unit of length measured in its own direction. This is mathematically equivalent to the product of a mass and the square of a velocity ( $L/T$ ), and even if the velocity to be squared equalled one metre per year, work would still be performed by an accelerating mass. Einstein's famous equation has the dimensions of work or energy, but implies, in fact insists, that work is only performed by an accelerating mass when the velocity to be squared is equal to the 'constant' speed of light. His equation is meaningless, misleading, and very very slick. Einstein believed the Earth was round. Does this prove that Flat Earthers do not subscribe to the theory of the great philosopher 'Fats' Waller, "Tain't what you do, it's the way that you do it - that's what gets results."?

Mr Burrows asks some awkward questions in his fourth paragraph. Why not leave the microscopic dictatorship of nuclear physics and try the macroscopic democracy of astronomy, looking for analogies that do not allow energy to disappear? It has been suggested that this universe is the inside of a huge spherical atom. Taking the analogy further, a radioactive atom would be filled to bursting point with colliding quasars and the resulting big bangs and young galaxies. Quasars are continuously losing a vast amount of energy. Are they transformed from electromagnetic waves when the waves are absorbed, and transformed back again into waves when they are emitted at a lower energy level? Are they by analogy massive radioactive atoms which on devolution are emitted as spent neutron stars or helium atoms? Are there intermediate-size groups of atoms between the Earthly and the Universely? How many universes are there? As many as there are atoms in our universe? Would over 200 'particles' be emitted if a radioactive universe disintegrated? *Wireless World* regrets the decline of the philosophical spirit, and so do I.

### "TRUTH TABLE" LOGIC SYMBOLS

There are many disadvantages in the system of intentional logic symbols (November 1980 issue, pp 61-62), the main ones being that once away from input stimuli no "true or assertive state" exists unless the circuit is further complicated by adding some form of flag to indicate an artificial "true or assertive state" at that point. In any case it is doubtful whether doubling the number of different symbols used can make diagnosis simpler, especially as identical gates may have different symbols.

There is a much simpler solution to the problem, that of what I would describe as Truth Table logic symbols. As far as I am aware the idea is original but I have not researched the matter. Fig. 1 shows the derivation of the

	AND		OR		NAND		NOR	
Truth table	Inputs	O/p	Inputs	O/p	Inputs	O/p	Inputs	O/p
Singular logic state	1 1 1	1	0 0 0	1	1 1 1	0	0 0 0	1
Truth table symbol	All else	0	All else	0	All else	1	All else	0

Fig.1

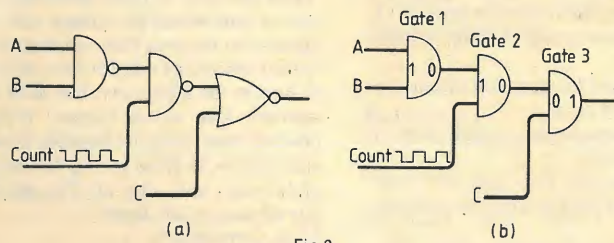


Fig.2

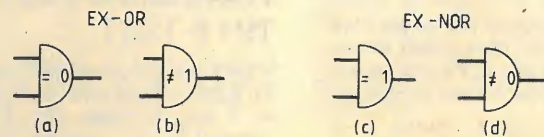


Fig.3

symbol from what I have described as the singular logic state of the simplest form of the truth table. The gate outline shape is of no great importance provided its input and output are clearly distinguishable (this excludes the rectangular box as per BS3939). Each input has a logic state associated with it (TT input state) and each output a logic state associated with it (TT output state). In order to produce the TT output state it is necessary to make all inputs equal to the TT input state. It does not tax the brain too much to deduce that, to get the opposite state out, any state other than all inputs equal to the TT input state will do. If a gate is in an application where, for example, a signal is input to a gate and the other inputs are used to enable that gate then the gate will be enabled for that signal then all other inputs are equal to the TT input state.

Fig. 2(a) shows the problem as stated by Mr Cassera in his November article on intentional logic symbols. Fig. 2(b) shows how it would be drawn using TT logic symbols.

In order to enable gate 3 input C must be 0. In order to enable gate 2 the output of gate 1 must be 1. Both are immediately obvious from the fact that to enable a gate enabling inputs must be equal to the TT input state.

To get 1 out of gate 1 any combination of A and B will do other than all 1s. This follows from the fact that the wanted state is not the TT output state.

The absence of the inverting symbols may worry some engineers used to conventional symbols but a NAND gate is only inverting because of the way the AND is defined. Few engineers would be entirely happy with this explanation but they can take comfort from the fact that it is extremely easy to tell conventionally inverting from conventionally non-inverting gates in that for inverting gates the TT input and TT output states are different implying an inversion.

The EX-OR and EX-NOR gates present a choice of symbols as shown in Fig. 3. If starting from scratch one would choose Fig. 3(a) and Fig. 3(c). Unfortunately Fig. 3(c), the symbol

for an EX-NOR, is too similar to the conventional EX-OR symbol, therefore Fig. 3(d) should be used for an EX-NOR. This would be interpreted that in order to get 0 out the inputs must be not equal. Either 3(a) or 3(b) could be used for EX-OR, 3(a) being preferred on the grounds of simplicity. To summarise, the system is very simple, is very largely self-explanatory, and requires little mental effort to change from existing practices. All identical gates have identical circuit symbols, the symbols themselves being uncomplicated.

J. E. Kennaugh  
Callington  
Cornwall

### TELEVISION AND THE DEAF

I have been interested to read the correspondence about amplifying tv sound for the deaf. Some years ago I was asked to help a deaf friend with this problem. A great deal of amplification was required but it was obviously going to be an advantage if normal hearing people could follow the programme without being blasted out of the room. Amplified headphones are not sufficient as the sound loses quality compared with that from a properly made earpiece with a mould made specifically for that person's ear. In addition many hearing aids have some form of equalization to try to compensate for hearing response curves changing with frequency.

It seemed to me that the answer was clear: use the amplification, equalization and earpiece already in the possession of the deaf person. Many hearing aids have some form of telephone pick-up coil and maybe some switching to allow "mic", telephone or both. Fortunately the Sony television to be used was equipped with both "listen" and "break" miniature jacks; giving the option of "silent" or joint listening. Providing a signal to drive the telephone pick-up was then very easy: a small coil fed from the earphone jack gave more than enough level. I used a 1kΩ Post Office 3000 relay coil to prove the

system, but as this was, to say the least, somewhat clunky, I replaced it with a small plastic covered coil marketed as a telephone pick-up but, of course, used in the other direction to that intended! All that needed to be done was to extend the lead.

This method has the advantage of being cheap, safe, and very good quality. It is easiest to use with body worn hearing aids but even deaf people using ear-level aids often have a second, body worn aid as a spare.

Incidentally, I have also used a telephone pick-up coil to detect the ringing current in the coil of a telephone bell: suitably amplified and rectified this can be used to control flashing light repeaters without interfering with the Post Office installation. A few resistors, a 741, a diode and a BC108 to drive a relay are all that is required.

Roger Derry  
Leytonstone  
London E11

### RADIO AMATEURS' LICENCE

As a citizens' band service is now proposed we, the undersigned, would like to suggest slight modifications to the radio amateur licence, as follows:

1. The use of c.w. by class "B" radio amateurs receiving and sending as part of the self-training in communication by c.w. on v.h.f. bands.
2. Limited use of station under supervision, e.g. jamboree-on-air, radio conventions, radio clubs, short wave league, XYLs, YLs etc.
3. The 27 and 930 MHz c.b. bands to be used by radio amateurs on the existing licence at no extra fee. Not type approved rigs.
4. The 10 and 4 metre amateur bands to be extended to class "B" radio amateurs; e.g. the 10 metre band to be used by licensed radio amateurs, not taken over by citizens' band.

M. Jackson (G8EOP)  
Dewsbury  
West Yorkshire  
Also G8WWE, G4LED, G3LHQ, G8PSE, G8EAH and 460 others.

### MICROCHIPS AND MEGADEATHS

I have no intention of cancelling my order for *Wireless World* as a result of your recent trend in editorials, but when I read some of the criticism against this, I sometimes wish I could cancel my subscription to the human race.

The electronics engineers referred to by Dr D. J. Dewhurst in June letters died, along with millions of others, in the hope that humanity would never again have to devote its time to finding ways of destroying itself.

Instead what is happening? The USA alone is planning to spend \$1,500,000,000,000 on using our technology to produce still more weapons of death. That is about 350 dollars for every man, woman and child alive on the earth. That money alone could save most of the world from starvation, and I haven't even mentioned the Soviet Union and dozens of smaller countries yet!

It is up to us, as engineers and as ordinary people, to stand up against this. We must all throw down our arms and say that we will not fight their wars for them. And if I, for one, get shot as a result, it will just prove to me that this world was not the one I wanted to go on living in.

Who will stand beside me?  
Tim Bierman  
London NW11

### BETTER RFI PROTECTION NEEDED

As a radio amateur, I wholeheartedly agree with Mr McLeod's observations (August Letters) that better r.f.i. (or e.m.c.) protection is needed for domestic electronic equipment. The problem of r.f. breakthrough is nothing new: it has existed for many years, but has become more prominent recently due to the number of illegal 27MHz a.m. c.b. transceivers now in this country.

Unfortunately, the manufacturers of domestic electronic equipment are unlikely to respond to Mr McLeod's plea for better r.f.i. protection. The design effort and extra components required would not be expensive, but the added cost would, no doubt, reduce their profit margin and/or competitive pricing. I can see two possible answers to the problem: (a) legislation to ensure that all domestic electronic equipment complies with a suitable e.m.c. standard; or (b) commercial pressure, i.e. bad publicity - if you have suffered with r.f. breakthrough, you are unlikely to buy the same make of equipment again. You would probably look for equipment which is better protected against r.f. breakthrough.

If there are any manufacturers whose products have a good e.m.c. performance, then they should say so. I am sure there are lots of customers in many countries waiting to buy their products.

P. J. Forshaw,  
Runcorn,  
Cheshire.

### FILTER TRANSIENT RESPONSE

Thank you and Mr Hamill very much for the much-needed article on the "Transient response of audio filters" in the August issue of *Wireless World*.

In December 1977, I wrote an article entitled "A transient phase?" for *Hi Fi Answers* in which I introduced a new term t.p.d. (for transient phase distortion), and followed this up with a more descriptive article in *Hi Fi Answers*, August 1978, entitled "Transient phase distortion".

Although for the sake of clarity in these particular articles I confined the description of effects and equipment to fairly simple things, understandable to the average man in the street, I had in fact investigated the effects of impulses and their responses, and their relationship to real music signals using a "Fast Fourier" Transform analyser (as well as the storage 'scope and v.l.f. signal generator mentioned in the articles) and I very much agree with Mr Hamill that frequencies are produced which bear absolutely no relationship to any Fourier component present in the original signal - in fact the pitch is completely out of tune when a filter is used to limit the bandwidth, and noticeably so if the filter is at all "steep cut". Unlike Mr Hamill, however, I had been interested in the effects of bandwidth limitation from a truly musical viewpoint. This approach led me to conclude that both high-and low-frequency band limiting filters are detrimental, but that gentle h.f. filtering is not seriously degrading because air itself can act as a h.f. filter and often does so, thereby causing the ear to be used to the effect of mild filtering, which just sounds "natural" when introduced artificially.

Again, unlike Mr Hamill, I have found conclusively that l.f. filtering is very detrimental to realism in reproduced sound. It too has its natural counterpart, which takes the form of

large areas of carpet suspended vertically close to the listener in the concert hall (to either side and rear I should point out!), or replacing the concert hall by a room 13ft square, say. Unfortunately, almost all reproducing equipment cuts off steeply below (at best) 45Hz in an average domestic living room, so the effects of filtering below this frequency are normally minimal as they are swamped by the inherent cut-off.

However, my system - demonstrated as "The" loudspeaker at "Hi-Fi 80" and recorded/photographed in July 1980 *Hi-Fi News*, page 52 - is truly flat down to four hertz in a room 16½ x 12ft (although this is not at all a function of room size), being +2½ dB at 6Hz and -2½ dB at 4 Hz in relation to 40Hz/400Hz/4kHz. For a good signal (which is not all that hard to come by on records!) it is very noticeable if the frequency response is out at 20Hz or left to go down to 4Hz flat, and the rate of cut is also critical between these figures. The effect of the filter is to remove spaciousness and precision of transient data. With the full range allowed to pass through to the ear, one can clearly hear the building boundaries, both their position and composition (the difference between a stone church or cathedral and a concert hall is very clear and real). Often air recordings sound as if they are in the open air, not in the listening room. As soon as the 20Hz filter is inserted all this disappears. The subjective effect is of an inferior performance, with both precision of tempo and accuracy of tuning or pitch affected a noticeable degree, and a removal of all that is considered "good" in the concert hall acoustic (as if the Colston Hall, for example, had been replaced by a large garden shed and the London Philharmonic Orchestra were replaced by the local youth orchestra). Of course, many recordings do not have the necessary range anyway, but many do, and it is such a pleasant surprise when this happens and realism comes through!

Graham Holliman,  
Watford,  
Herts.

### 'SPREADING'

The amateur fraternity here in Australia, and I suspect that it is much the same in other parts of the world, cling tenaciously to what I regard as a ridiculous superstition known as "spreading".

I should here explain for the general reader that the amateur fraternity these days employs almost exclusively the mode of transmission known as "single-sideband, suppressed-carrier", where the signal, before transmission, is passed through a band-pass filter restricting the bandwidth of the transmitted sideband to about 3 kHz.

The superstition to which I refer surfaces when a very strong signal is received and the receiving operator notices that he obtains an "S-9" indication on his signal-strength meter over perhaps 8 or 10 kHz on the dial of his receiver. The operator jumps to the conclusion that the transmitting station is actually radiating energy over a bandwidth of 8 or 10 kHz. Vain to tell them that this is an effect occurring in the receiver itself due to a combination of the effects of selectivity and a.g.c. Invariably, the transmitting operator is abused, and accused of negligence and incompetence.

I am wondering whether other readers of *Wireless World* have encountered this superstition and if so what they make of it.  
R. C. Yates,  
Charlestown,  
N.S.W., Australia

# Digital, multi-track tape recorder

Uses modified audio cassette deck for very low-cost, 12 channel recording

by A. J. Ewins, B.Tech., Research Department, London Transport

In applications where multi-track recording of experimental data is needed, but where several tape speeds and a wide bandwidth are not essential, a conventional f.m. instrumentation is an expensive luxury. This design uses a slightly modified Linsley Hood audio cassette recorder as the heart of a multi-track digital tape recorder. It can handle 2, 4, 6 or 12 channels with bandwidths of up to 42Hz and with zero wow and flutter.

In the field of electronic data collection and storage, that is the recording of signals from various electrical transducers with bandwidths of from zero to several kilohertz, the f.m. instrumentation tape recorder has played an almost unequalled role for many years. Perhaps because the market for such machines is small, they have become very complex, possibly in an attempt to answer every user's needs in just one design. The result of this is that they are very expensive. Typically, a 14-track machine using one-inch magnetic tape and operating with a range of six tape speeds can cost over £20,000. Reels of one-inch tape are also very expensive! Less-complex f.m. tape recorders are available that use quarter-inch tape, operate with a reduced range of tape speeds and with a reduced number of tracks, but which may still cost several thousands of pounds.

One of the main reasons for the f.m. i.t.r.'s expense is the very advanced tape deck used. In f.m. tape recorder designs it is necessary to reduce the wow and flutter content of the tape deck to a minimum to obtain a reasonable signal-to-noise ratio, since any wow and flutter of the recorded signals looks like frequency modulation and hence, when demodulated, represents an unwanted signal, or noise. Another reason for the high cost of f.m. recorders is that, to achieve multi-track recording, very expensive multi-track recording heads must be used. Nevertheless, in spite of these comments, when used to its fullest extent, the multi-track, multi-speed f.m. i.t.r. has yet to be bettered. There are instances, however, when multi-track (or multi-channel) recording is needed, but with reduced bandwidth requirements and without the need for a multi-speed option. To use an f.m. i.t.r. for this purpose, simply because it is the only type of machine available to offer multi-channel recording, is a very expensive solution. It is in an

attempt to meet this need that the author has designed the multi-channel, digital tape recorder that is the subject of this article.

Essentially, a multi-channel machine with a bandwidth for each channel in excess of 50Hz was needed. A single-speed machine could be tolerated, provided it was possible to obtain wider bandwidths for each channel by reducing the number of channels available: digital techniques make it simple to do this. Another requirement was that the signal-to-noise ratio for each channel should be as good, or better, than that possible by f.m. recording. Again, digital techniques make it possible to obtain any desired level of signal-to-noise ratio by simply digitizing the analogue signal to the required number of bits. It is also possible, using digital techniques,

recorded data eases the need for a tape deck with superior mechanical qualities, and the possibilities of using a cassette tape recorder were therefore considered: such recorders are cheap, compared with reel-to-reel machines, and tape cassettes offer the cheapest recording medium possible. To remove wow and flutter from the recorded data, the long-term speed stability of the tape must be accurately controlled. Commercially available cassette tape recorders for the hi-fi market are not easy to modify and it was thought that the best solution would be to obtain a recorder in kit form. There appeared to be only one such instrument available—the Hart version of J. Linsley Hood's excellent design. This did indeed prove to be the solution, for it was simple to modify the motor and speed control system of the

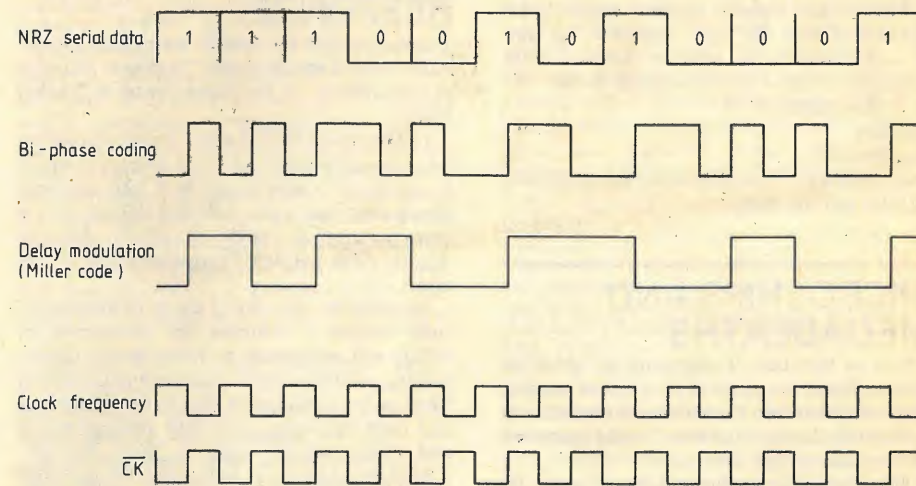


Fig. 1. Data is in non-return-to-zero (NRZ) form at input of recorder. Two possible encoding systems are bi-phase and Miller code. Miller has lower frequency content, allowing twice as much recorded data, but needs more extensive decoding circuitry. Higher data capacity considered to outweigh disadvantage of circuit complexity.

to completely remove wow and flutter from the recorded data. This is very easily done if the digitized data is played back into a digital computer for analysis and not reconstructed into analogue form. However, the author's requirement was to remove it completely from the reconstructed analogue data outputs.

Removing wow and flutter from the

VFL 910 deck used in the Hart kit. Since the kit costs around £110, a relatively cheap instrumentation tape recorder is therefore feasible.


Replacing the front panel of the Hart recorder with one of 19in wide and 3U height (5½in) made it possible to fit the recorder into a standard 19in instrument case. In the photograph of the complete instrument, the Hart recorder is mounted in a 19in case of 6U height (10½in) with the digital electronics mounted in a rack-frame beneath it.

## Specification

Before going on to a detailed description, the specification achieved by the prototype design is presented here so that readers may appreciate its qualities and limi-

tations. Twelve channels of analogue data may be recorded simultaneously, with a bandwidth of 70Hz (allowing for anti-aliasing filters); six channels are recorded on each track of the 'stereo' cassette recorder. Six, four or two channels can be used, with consequent increased bandwidths of 140Hz, 210Hz and 420Hz, respectively. Recorded data is reconstructed into analogue form on playback, with a signal-to-noise ratio of the order of 60dB, achieved by digitizing the analogue data into 10-bits. (Data words of 12 bits length are used, 2 bits being allowed for parity checks.) Wow and flutter content of the replayed analogue signals is zero.

An important parameter of any instrumentation tape recorder is its response to imperfections in the quality of the tape and also to vibration. Many such i.t.r.s are used in the transport industries and are therefore subject to considerable vibration.

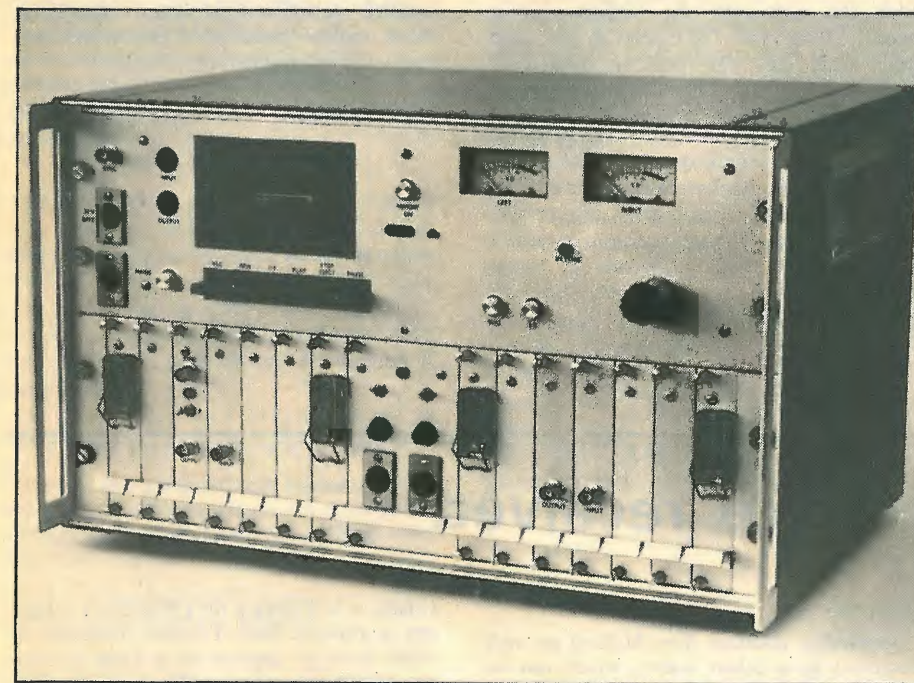

Complete multi-track tape recorder. Top half is modified Linsley Hood cassette deck.

The effect of both poor-quality tape and excessive vibration is to produce a momentary signal drop-out, resulting in a 'glitch' in the recorded data, the importance of which depends very much on the type of analysis that is subsequently carried out on the data, and which in some cases can be very embarrassing. Digital recording techniques are very much more sensitive to both these faults and it was therefore with some trepidation that the author embarked on such a design using a relatively cheap cassette-recorder and cassette tapes.

It is possible to eliminate the problem of poor-quality tape, provided the imperfections are not extensive, by distributing the serial data stream across several tracks of the tape and by using advanced error detection and concealment techniques.

It was not practical to attempt such sophistication in a relatively cheap recorder. The first attempt at eliminating the generation of glitches was thus a simple one and consisted of adding two parity bits to the 10 bit data word. In the event of a parity error being detected in the played-back data, the output signal of the particular channel is simply held at the level given by the last correct data word. The author's expectations of this simple error-detection system have been more than satisfactorily realised! using good-quality cassette tapes, such as the Maxell UDXL II, typically less than five glitches have been detected on one channel in 30 minutes of recorded data, with the recorder in its two-channel mode. Nearly all the glitches occurred at the beginning and end of a cassette and if half a minute's recording time were eliminated from each end of the cassette it would appear that most would be removed.

NRZ digital data directly onto tape, because long strings of zeroes or ones would contain a strong low-frequency content. Also, with no changes in the signal level taking place, there is no information being generated from which to recover the clock frequency. Because of the inability of conventional recording techniques to record signals down to zero frequency (20Hz is about the best lower limit of a good direct-recording tape-recorder) and the need to be able to extract the clock frequency from the recorded data, it is essential that the serial data be encoded in such a way that frequent changes occur in the output voltage. However, to maximize the recording density of the tape, these changes should be as infrequent as possible.

Two encoding systems were considered — bi-phase encoding and delay modulation (also called Miller code). Figure 1 shows a serial stream of digital, non-return to zero (NRZ) data and the resulting outputs from the two encoding systems. Bi-phase encoding results in a positive signal transition at the centre of 1 cells and a negative transition at the centre of 0 cells. Miller code is simply bi-phase encoding divided by 2 and results in a signal transition at the centre of a 1 cell and between adjacent 0 cells: the direction of a transition in Miller code is unimportant. In bi-phase encoding the highest fundamental frequency present in the encoded data (ignoring harmonics) is that of the clock oscillator. In Miller code, it is half that of the encoding clock oscillator. The lower frequency content of the Miller-coded data, compared with the bi-phase coded data, is the main advantage of Miller code. It means simply that twice as much data may be recorded on tape, within a given bandwidth, using Miller code than by using bi-phase encoding.

Miller code does, however, have disadvantages. It is relatively simple to extract the clock frequency from encoded bi-phase data, and also to decode it. The circuitry required to decode Miller code and to extract the clock frequency is very much more complicated. It is also desirable that the sequence 1, 0, 1 be included in the NRZ serial data stream since, in the absence of 1s or 0s, a string of encoded 0s looks exactly the same as a string of encoded 1s. However, there is a phase difference between encoded 0s and 1s which is only detectable when both are present in the data. The sequence 1,0,1 in the encoded data produces a unique time gap between signal transitions and thus correctly sets the Miller decoder for decoding 1s and 0s. To determine which encoding system should be used, the author had to decide between circuit complexity and high data capacity or relatively simple circuitry with reduced data capacity: the decision in favour of a higher data capacity brought with it the need to design a reliable clock-recovery circuit and Miller decoder.

## Design philology

To record the outputs from a number of analogue channels, digitally, on to one track of a tape-recorder they must be multiplexed, converted to digital words, formed into a continuous stream of serial data, and suitably encoded. The first decision to be made was the method by which the serial data stream should be encoded. The need for encoding arises from the fact that it is not possible to simply record the

simplify the recording circuitry. However, as the Hart cassette recorder used in the design was already complete with its linearizing circuitry, there was no reason to modify it.

Since the frequency response of the recorder extends to 15kHz, it was expected that it would cope with encoded data whose highest fundamental frequency was of the order of 12kHz. Using Miller code this meant that a bit rate of 24kbits/s could be handled, using a clock oscillator of 24kHz. To determine the number of channels that could be multiplexed and recorded on one track of the cassette recorder, a number of requirements needed to be considered, with an ultimate bit rate of 24kbit/s as the objective:

- the minimum required bandwidth of each channel,
- the desired signal-to-noise ratio,
- the number of parity bits per data word,
- the inclusion and length of a synchronization word.

First, the desired bandwidth was a minimum of 50Hz. To allow for anti-aliasing filters, this meant a sampling rate of 4 to 5 times the bandwidth, say 250Hz. Second, a signal-to-noise ratio of 60dB was

considered desirable, which could be achieved by digitizing to 10 bits (in f.m. i.t.r.s., the signal-to-noise ratio is the ratio of the peak signal level to r.m.s. noise level. If the ratio of r.m.s. signal level to the r.m.s. noise level is taken, 10 bits produces a signal-to-noise ratio of only 57dB). With 10 bits for the data an additional 2 bits for parity was thought sufficient, making a total of 12 bits per data word. Eight channels of 12 bit data words, sampled at a frequency of 250 Hz, produces a bit rate of precisely 24kbits/s. However, as mentioned earlier, the sequence 1,0,1 is needed in the data stream so that the Miller-coded data can be decoded: a synchronization word in the data stream at regular intervals allows for this. It also allows correct synchronization of the data on replay and de-multiplexing. To insert a sync word into the data stream, without interrupting its steady flow, temporary storage buffers are needed for the data. Two clocks also become necessary - one to clock the data into the buffers and a second, faster one - to clock the data and sync word out. The ratio of these two clocks will be  $(x \times 12) : (x \times 12) + y$  where  $x$  equals the number of channels and  $y$

equals the number of bits in the sync word. With 6 data words of 12 bits and a sync word of 8 bits this ratio could be very conveniently made 9:10, i.e.  $(6 \times 12) = 72$ ;  $(6 \times 12) + 8 = 80$ . A common crystal-controlled oscillator of 3,2768MHz, divided down by  $16 \times 9$  and  $16 \times 10$ , gives frequencies for the two clocks of 22,755.5 Hz and 20,480 Hz respectively.

The faster one is referred to as the tape clock, since it runs at the rate at which the data, plus sync word, is encoded on the tape-recorder. The slower one, running at the rate at which data alone is handled, is the data clock. The tape clock, at 22,755.5 Hz, is very close to the aimed-for bit rate of 24kbits/s and is the closest that can be achieved using standard crystals. For this reason, and because of the convenience of a 9:10 ratio for the data and tape clocks, it was finally decided to record six channels per track of the cassette recorder. With a data clock of 20,480 Hz, 12 bit data words and 6 channels, the sampling rate per channel works out at 284.4 samples/s, which makes possible a bandwidth per channel of around 60 Hz to 70Hz.

To be continued.

# The cartridge alignment problem

A new approach

by R. J. Gilson, M.I.Mech.E.

**Of the two basic sources of distortion and wear involved in the use of a pivoted tone arm, tracking angle errors and lateral loading on the stylus, the customary approach assumes that the first is all-important. Hence use of overhang and offset figures that give the lowest tracking angle distortion over the playing area of the record. This approach may be fallacious, and a better overall performance may be attained by paying attention to the influence of overhang and offset on lateral loading conditions.**

It must be clear to readers of the hi-fi press that there has long been a marked difference of opinion between manufacturers and hi-fi writers regarding the correct approach to arm geometry and alignment problems. The following quotations selected from recent publications are typical of many more:

"Most arms are sub-optimally designed."

"There is about a 50-50 split between those designed for minimum tracking error and those not really designed for anything at all other than high distortion."

"Pickup arms vary wildly in their geometry and few are properly designed."

"Current techniques for cartridge alignment are based on completely false assumptions and achieve... not alignment but misalignment."

"At present the importance of accurate arm alignment is highly under-estimated."

"If the arm geometry is wrong (sic) it can only be due either to cussedness or plain ignorance on the part of the designer."

Strong words indeed! The most common ground of condemnation is that the amount of stylus overhang and head offset is insufficient to achieve the lowest possible tracking error distortion, over the playing area of a 12" record. The mathematical basis for achieving the lowest possible tracking error distortion has been examined by a number of people prominent amongst whom were Bauer and Baerwald more than three decades ago. These approaches have been well publicised and it seems to be the essence of the pundits' criticism that manufacturers are too ignorant, obtuse or disinterested to take notice of these well known methods of design. But there are disadvantages in aim-

ing at the lowest possible tracking errors which do not seem to be considered by those who censure the manufacturers so strongly. This article examines both aspects and suggests a way of resolving this longstanding controversy.

## Tracking geometry

Tracking angle errors are minimized by offsetting the pick-up cartridge at an angle to the arm, as indicated by broken lines in Fig. 1. It is the amount of variation in  $\beta$  across the playing area of the record that determines the magnitude of the tracking error, i.e. the discrepancy between  $\beta$  and offset angle. Graph shows the relationship of  $\beta$  to  $R$  over the playing area for various values of overhang, and to obtain the minimum possible tracking errors an overhang figure in the region of 15 to 20mm is needed. (This is based on a value of  $C$  of 203mm (8in), which seems typical. For other values overhang required will vary inversely as  $C$ . This is dealt with more fully later). The formula proposed by Bauer/Baerwald for calculating "opti-

um" overhang, in the sense of achieving lowest possible tracking errors (see appendix) gives an  $h_0$  of 17.9mm, for  $R=146$ ,  $r=60$ ,  $L=221$ mm, where  $R$  and  $r$  are outer and inner groove radii, which agrees with expectations from the graph of Fig. 1. A more recent rule (Stevenson, May, June 1966) gives the same figure of 17.9mm (see appendix). Another widely publicised rule is to set zero tracking angle error at radii of 121 and 66mm. The overhang figure necessary to meet the requirement of zero angular error at any two radii can be calculated from equation 3, and for  $C=203$ ,  $R=121$  and  $r=66$ mm gives  $h=18.8$ mm, which is in close agreement. Randhawa in WW March 1978, proposed overhang and offset figures comparable to those given by Bauer, although if anything slightly higher. The actual figure proposed for an 216mm value of  $L$ , is 16.5mm, which is somewhat smaller than the above figures because a smaller value of  $r$  has been assumed, i.e. 54mm in place of 60mm.

The next step is to evaluate the corresponding offset angle which will average out the angular errors to best advantage. (This is, of course, provided automatically

## Literature received

Twenty four application notes from Datalab present information on the use of their **transient recorders** with a number of computers, calculators, tape punches and graphics terminals. Copies are obtainable from Data Laboratories Ltd, 28 Wates Way, Mitcham, Surrey CR4 4HR.

WW401

1981 Samtec catalogue contains 44 pages of specification and ordering information on a range of **plugs, sockets, jumpers** and terminal strips. Write to Symec Electronics Ltd, Lexden Lodge, Crowborough Hill, Jarvis Brook, Crowborough, Sussex.

WW402

Single, dual and triple-rail **power supplies**, mounted on Eurocards and covering all standard voltages from  $\pm 5V$  to  $\pm 30V$  are made by Vero, who describe them in a new brochure, available from Vero Systems, 362A Spring Road, Southampton SO9 5QD.

WW403

Ambit International have changed the name of their **components catalogue** to 'The World of Radio And Electronics' and intend to produce it quarterly. Items stocked will, they say, complement their magazine. Price is 60p, but the catalogue contains three £1 vouchers. Ambit are at 200, North Service Road, Brentwood, Essex

CM14 4SG.

**Metal-film resistors** from Mullard are well described in a colour leaflet, which can be obtained from Mullard Ltd, Mullard House, Torrington Place, London WC1E 7HC.

WW404

Catalogue covering a range of ceramic, chip and mica capacitors is available from RBS Capacitors Ltd, Orchard Works, Vencourt Place, Hammersmith, London W6 9LZ.

WW405

Publication from ICI discusses the **cleaning and drying** of metal, glass and plastics components and equipment in the electronics industry, using Arkclone W solvent in special plant. Copies from ICI Solvents Marketing Department, ICI Mond Division, PO Box 19, Runcorn, Cheshire WA7 4LW.

WW406

**Data conversion equipment** is the subject of a short catalogue from Micro Networks. It includes brief descriptions of digital-analogue-digital converters, track/hold amplifiers, instrumentation amplifiers and complete systems. The company is represented in the UK by Pascall Electronics Ltd, Hawke House, Green Street, Sunbury-on-Thames, Middlesex TW16 6RA.

WW407

Catalogue of **software** for CP/M-based computers is available from Transam. Programs include those for general office work, business and accounting and scientific operations. Languages include several varieties of Basic and Pascal. TCL Software, 59/61 Theobald's Road, London WC1.

WW408

Catalogue of general **electronic components** from Vako contains descriptions of a wide range of discrete and integrated semiconductors, displays, passive components and hardware, including a large section of loudspeaker drive units. Write on company letterheads to Vako Electronics Ltd, Pass Street, Werneth, Oldham, Greater Manchester OL9 6HZ.


WW409

Short catalogue by Burr Brown on a-d-a converters, amplifiers, analogue circuit functions, power supplies and fibre-optic data links. Burr Brown International Ltd, Cassiobury House, 11-19 Station Road, Watford, Herts WD1 1EA.

WW410

Selection of **switches** from Lorlin is described in a new catalogue. Types shown are rotary, lever rotary, lock switches, p.c.b. types, sliders and mains switches. Catalogue from Lorlin Electronic Co. Ltd, Daux Road, Billingshurst, Sussex RH14 9SW.

WW410

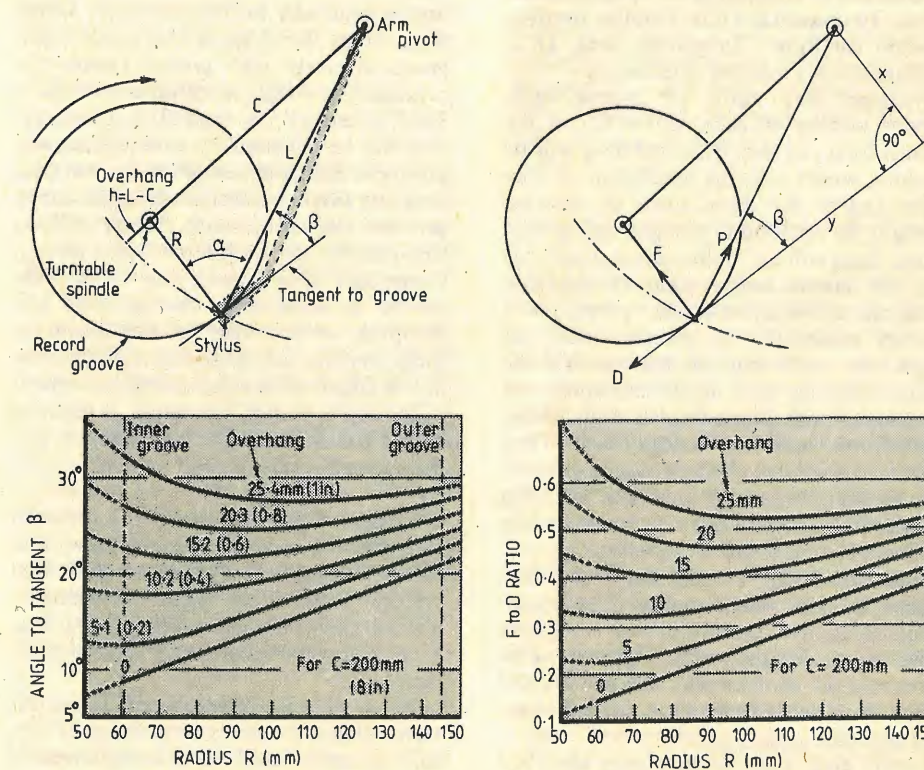



by adopting the two-point zero error method as instanced by formula 3, but in the more general case it is necessary to find the optimum offset angle for any selected value of overhang.) Looking at Fig. 2 again, there are three potential points of maximum angle error, i.e. outer radius, inner radius, and intermediate radius at which  $\beta$  is a minimum. This last, the radius for minimum  $\beta$ , can be calculated from  $R_{\min} = \sqrt{L^2 - C^2}$ . For the curve in Fig. 2 for  $h=20\text{mm}$ , if the offset angle were to be set at  $25^\circ$ , tracking angle errors would be  $\times 2$ ,  $-0.4$  and  $\times 2.5^\circ$  at inner,  $R_{\min}$ , and outer grooves respectively. To put this into perspective, notice that distortion due to tracking error is proportional to angular error and inversely to groove radius, so we need to convert the angle errors to degrees per unit of radius i.e.  $+0.33$ ,  $-0.06$  and  $+0.17^\circ$  per cm of radius. Obviously this is not the best that can be done, and the figure of  $25^\circ$  for offset angle needs increasing a little. The best value could be found by trial and error, or calculated from formula 4a, see appendix.


### Lateral bias forces

It is an unfortunate fact of life that with a pivoted arm moving in an arc, there must be a side force acting on the stylus tip which becomes greater with increasing overhang. The basic conditions are set out in Fig. 3, where  $F$  is the side thrust resulting from the angular difference between the directions of stylus drag  $D$  and resisting pull  $P$ . Taking moments about the arm pivot, force  $F$  can be evaluated in terms of drag  $D$  by  $F = D \tan \beta$ . Values of  $F/D$  are plotted in Fig. 4, which shows  $F$  can reach 50% of the drag  $D$  with 18mm overhang. The normal method of dealing with this side thrust is to apply an opposing outward torque or bias to the arm, but it seems not to be generally appreciated that such compensation is very much of an approximation. To understand this, examine the drag factor carefully. Tangential drag  $D$  is composed of a number of elements.

**Frictional drag.** With  $45^\circ$  groove walls, stylus loading on each wall is 0.7 of the down force, so that frictional drag will be  $1.4\mu w$ , where  $\mu$  is the coefficient of friction and  $w$  the down force or tracking weight. In addition to straight sliding friction, there will be "deformation drag" due to the elastic deformation of the disc material at the stylus contact point, and it seems reasonable to estimate that the effective coefficient of friction will be somewhere between say 0.1 minimum and 0.3 maximum, depending on stylus shape and finish, and disc surface finish. Thus the total frictional element of drag  $D$  could be between about 0.15 and 0.4 of the down force. In principle, this frictional element is independent of groove velocity.

**Modulation drag.** In addition to the frictional element which applied to an unmodulated groove, there will be further drag due to modulation of the groove. This modulation element can be sub-divided into three related elements, inertial drag, compliance drag and transducer drag.

**Inertial drag** is due to the energy absorbed

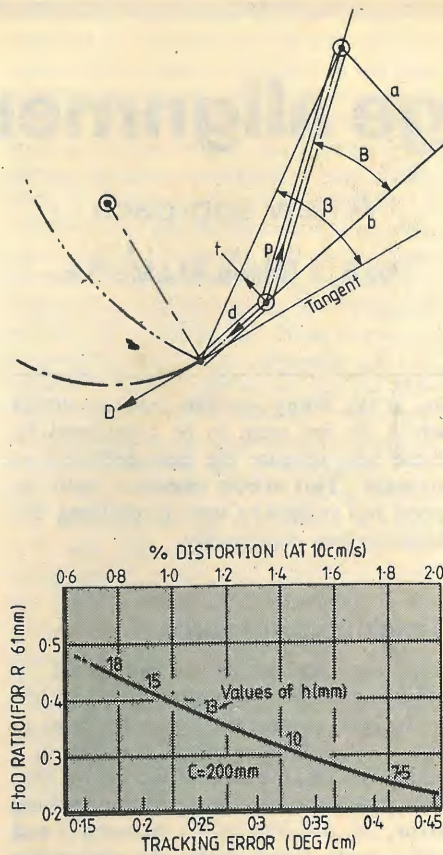

in accelerating the stylus/armature system as it responds to the groove modulation. Acceleration can be extremely high, up to 1000g or more, and inertial effects must be correspondingly great. The energy required to violently waggle the stylus/cantilever/armature system can only be supplied by the turntable motor, and on the assumption that for a given music content the energy requirement is constant, it follows that a constant torque is imposed on the turntable motor, which means that the drag at the stylus point varies inversely with groove radius. (In principle, no energy is required to waggle a mass, as energy absorbed during acceleration will be balanced by an equal amount given out during deceleration. But we are a long way from a perfect mechanism, and in practice the deceleration forces will be dissipated in the form of frictional losses.)

**Compliance drag** covers the energy absorbed in overcoming the stiffness and damping or hysteresis of the cantilever hinge system, and is presumably greatest at low frequencies when lateral movement of the stylus is at a maximum. It tends to have a constant energy characteristic, giving an inverse relationship to groove velocity.

**Transducer drag** covers the energy absorbed in converting mechanical energy input into electrical output from the armature/field system. Presumably small compared to inertial and compliance drag, it will also have an inverse relationship to groove velocity.

In the absence of measured figures for stylus drag one can try to make some sensible guesses based on a background of

mechanical engineering principles. It seems obvious that a heavily modulated groove will impose more drag than a lightly modulated one, and bearing in mind the high acceleration figures involved, it seems reasonable to assume that modulation drag might reach a peak value of say 30% of the down force. (Modulation drag is not in fact directly influenced by down force, but in practice tracking weight or down force is affected by stylus mass and mechanical impedance, and in this sense modulation drag can be related to minimum tracking weight.)

Adding frictional drag to the assumed modulation drag, we get a total stylus drag varying from a minimum of perhaps 15% of down force up to a peak maximum of perhaps 60% or more. With 18mm overhang giving an  $F/D$  ratio of approximately 0.5, side thrust  $F$  could be anything between say 8 and 30% of tracking weight. Part of this thrust varies inversely with groove radius, increasing from rim to centre, and more importantly it can fluctuate violently with modulation characteristic. It is unrealistic to expect to cancel out the ill-effects of fluctuating side thrust by a fixed arm bias, although it may mitigate things a little. About the best one could achieve, assuming drag  $D$  could be accurately assessed, would be to reduce the maximum  $F$  by about  $\frac{2}{3}$ , at the cost of increasing the minimum  $F$  in roughly the same proportion.

As well as force  $F$  increasing the stylus loading on the inner groove wall and reducing the loading on the outer wall, there is a separate force acting to displace the stylus from its free dead-centre position. This is due to the tendency of the tangential drag  $D$  to pull the stylus cantilever into line with the arm pivot, and might be termed the reverse toggle effect. The conditions are set out in Fig. 3, which shows that by taking moments about the arm pivot, effective stylus displacement force is  $t = d \tan \beta$ . Angle  $\beta$  will be nearly the same as the tracking angle  $\beta$ , and  $d$  will be almost the same as  $D$ , so  $t$  is substantially the same as  $F$ , Fig. 3. It follows that any arm bias applied to compensate  $F$  will also compensate  $t$  to almost the same extent. If we apply an outward acting arm bias of say  $\frac{2}{3}$  of maximum  $F$ , then in lightly modulated grooves the displacement force  $t$  will be over-compensated, and there could be a net force  $t$  of roughly 15% of the tracking weight acting to rotate the cantilever in a clockwise direction. Conversely, in a peak-modulated groove there will be a partially compensated force  $t$  acting to rotate the cantilever in an anticlockwise direction. The amount by which the cantilever/armature system is displaced will depend on the static compliance of the cartridge, and any ill-effects on sound quality will depend on the sensitivity of the transducer system to non-linearity due to displacement from the true dead-centre position.

In addition to any audible effects, the existence of force  $F$  must result in added wear on stylus and disc. It may not be realised that the effective increase in stylus loading against the inner groove wall is double the net force  $F$ . If a given cartridge

requires  $w\text{gm}$  tracking weight with zero  $F$ , as could be the case with a true radial or straight-line arm movement, then if  $F$  becomes say  $0.2\text{gm}$  the tracking weight will need to be increased to  $w+0.2\text{gm}$  to prevent mistracking on the groove outer wall, and the lateral loading on the inner wall will be increased by  $0.4\text{gm}$ .


The existence of so many factors in the lateral bias problem, and the difficulty of assessing the optimum balance between conflicting requirements, is doubtless the reason for the widely differing approaches adopted. The Hi-Fi press seem to regard an arm bias of about 10% of tracking weight as "correct", whilst manufacturers adopt anything between 5 and 30%. And at least one major record company recommend setting arm bias on a plain ungrooved section of their test record! There are also differences of opinion on the question of whether bias should increase or decrease over the arm travel. The press seem to regard increasing bias from rim to centre as desirable, whilst some manufacturers adopt reducing bias, presumably on the reasonable assumption that the tendency for modulation drag to increase with reducing groove radius is more than balanced by the tendency for  $F/D$  to fall towards the inner grooves when overhang is small.

### Optimization

To date, the emphasis in the press seems to be confined to the problem of achieving minimum possible angular errors, without regard to the possible penalty in increasing the lateral forces  $F$  and  $t$ .

Distortion due to angular error is proportional to angular error per unit of groove radius and is quantified in a formula attributed to Baerwald,  $d = 4.44e/r$ , where  $d$  is % tracking error distortion for modulation velocity 10 cm/s,  $e$  is tracking error in degrees, and  $r$  is groove radius in cm. Using this formula in conjunction with Fig. 2 for values of  $F/D$  and formulae 4 for optimum offset angle, one can plot  $F/D$  against distortion, as shown in Fig. 4. The whole controversy is summed up in this curve. It shows simply that the lowest possible tracking angle errors can be achieved only at the cost of increasing the values of  $F$  and  $t$ ; and conversely forces  $F$  and  $t$  can only be reduced by accepting increased angular errors. In the absence of published information on the audible effects of the opposing factors, the optimum balance is anybody's guess, but it is hard to see justification for the assumption that the lowest possible angular error must necessarily be the best condition. Tracking distortion is said to be predominantly second harmonic, and the question arises of what level becomes audible. According to one source\* 5 to 10% second harmonic distortion is normally undetectable, so it seems highly improbable that a mere 1% distortion would be audible, bearing in mind the overtone content and highly complex waveform of musical modulation. Would the  $1\frac{1}{2}\%$  imposed by the usual overhang of only 10mm adopted by manufacturers become audible? Or the

\*"Pickups, the key to hi-fi", by J. Walton (Pitman).

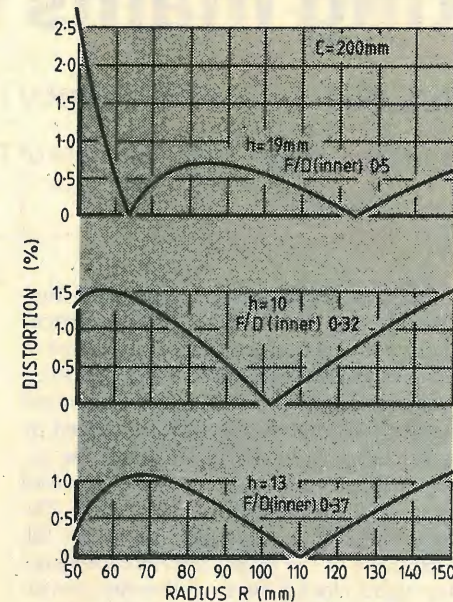

2% necessary to halve the force  $F$  at inner grooves? Without a definite answer, it is difficult to formulate an optimum balance between the conflicting factors.

There are two essential factors to investigate, the audible effects of angular error and of lateral force, and it should be a fairly simple matter to undertake this with the aid of a straight-line arm for a reference. The cartridge could be twisted round in say  $1^\circ$  steps up to a maximum of perhaps  $7^\circ$ , and side loading could be applied (perhaps by tilting the deck bodily) in steps of say 5% of tracking weight up to perhaps 50% maximum. If such tests were assessed by listening panels, using a number of top-grade cartridges of differing characteristics, this would surely provide a firm basis for arriving at a generally acceptable balance. The listening tests could be supplemented by wear tests on the stylus, and by measurements of stylus drag.

In thinking about these problems, it is necessary to keep a sense of proportion; tracking error is only one source of distortion and possibly a minor one. Probably the worst source is tracing error, which can easily run into double figures percentage at the inner grooves, particularly with slight stylus wear. Then there is vertical tracking angle error, which is difficult to avoid. Another source is that due to any longitudinal compliance in the stylus/armature system; it is usual to mount the cantilever in an elastomeric grommet or block, and this is not adapted to providing much rigidity in the longitudinal direction.

Bearing all these factors in mind, it seems not unlikely that the manufacturers are doing the right thing in using lower overhang and offset figures than those favoured so strongly by the hi-fi pundits.

It may be helpful to examine the distortion figures across the playing area of the record, for the extreme conditions favoured by one side or the other. Fig. 5 shows the distortion profiles at 10cm/s for three different overhang conditions: 19mm

### Appendix

The "two sides and included angle" trig. formula  $a^2 = b^2 + c^2 - 2bc \cos A$  applied to Fig. 1 gives

$$\sin \beta = \frac{L^2 + R^2 - C^2}{2LR}$$

$$\text{or } R = L \sin \beta \pm \sqrt{(L \sin \beta)^2 + C^2 - L^2} \quad (1)$$

Bauer/Baerwald formula:

$$h_0 = \frac{r^2}{L \left[ \frac{r}{R} + \frac{(R+r)^2}{2R} \right]} \quad (2)$$

where  $R$  and  $r$  are outer and inner groove radii.

Stevenson:

$$h_0 = L - \sqrt{L^2 - 7600}$$

$$\text{or } \sqrt{C^2 + 7600} - C$$

Overhang for zero angular error at any two radii:

$$h = \sqrt{C^2 + Rr} - C \quad (3)$$

where  $R$  and  $r$  are points of zero angle error.

Offset angle:

$$\frac{\beta_i R_{\min} \times \beta_{\min} R_i}{R_{\min} \times R_i} \quad (4a)$$

where  $\beta_i$  is the angle at inner groove and  $R_{\min}$  the radius at which  $\beta_{\min}$  occurs. For the present example, this works out to  $\beta_{\text{opt}} = 26.1^\circ$ , which gives errors of  $+0.15$ ,  $-0.16$  and  $+0.09^\circ$  per cm.

This is the best we can do when rounding to the nearest  $0.1^\circ$ , the points of maximum error being at inner grooves and  $R_{\min}$  of 93mm. With smaller overhang figures, as often used by manufacturers, the points of maximum error will usually be at outer grooves and  $R_{\min}$ , and the new formula for  $\beta_{\text{opt}}$  becomes

$$\frac{\beta_0 R_{\min} \times \beta_{\min} R_0}{R_{\min} \times R_0} \quad (4b)$$

where  $\beta_0$  is angle at radius  $R_0$  (normally 146mm). If the overhang is small enough to place  $R_{\min}$  less than the inner groove radius, usually below 10mm, then the formula for  $\beta_{\text{opt}}$  becomes

$$\frac{\beta_0 R_i \times \beta_{\min} R_0}{R_0 \times R_i} \quad (4c)$$

as required to give lowest possible distortion, 10mm as favoured by many manufacturers, and my proposal of 13mm the low distortion achieved by the 19mm condition is only maintained if the inner groove radius does not fall below 60mm, and in practice figures down to 58 or even 56mm can occur with 33 rev/min discs, while 45s can go down to about 50mm. At the other extreme, the 10mm overhang gives  $2\frac{1}{2}$  times greater distortion at the nominal 60mm inner groove radius, in return for 35% reduction in lateral forces  $F$  and  $t$ . The proposed 13mm condition seems to make sense; it holds distortion down to a maximum of about 1%, and provides 25% reduction in lateral forces as

Continued on page 64

# Tracking mains filter

High-Q active network rejects low frequency interfering signals

by K. Radhakrishna Rao and R. S. Moni, Indian Institute of Technology, Madras

The circuit described is a high-Q, self-tuning band-rejection filter for suppressing low-frequency interfering signals, particularly 50Hz power-line interference. It makes use of four op-amps and a phase-correction scheme and needs no precision components. Because the notch frequency of the filter tracks the frequency of the interference signal, tolerances and temperature coefficients of the frequency-determining passive components do not affect the performance.

Active band-elimination filters have become important in instrumentation used in biomedical and other fields, to eliminate low-frequency interference signals, particularly those due to the 50Hz mains frequency and its harmonics. High-Q band-stop filters are required, but without affecting the physiological data, which carries a wide range of frequency components (normally from zero to 5000Hz). Such a high-Q filter requires excellent performance characteristics. The zero-frequency of the filter has to be accurately determined by the passive components, and it must exactly coincide with the pole-frequency. Such stringent requirements need precision passive components with zero temperature coefficients. But even if the filter satisfies all these conditions there is no guarantee of the frequency stability of the interfering signal. This frequency might fluctuate from its nominal value and result in the feed-through of a significant portion of the interference signal at the output of the filter. This problem can be tackled only by using a self-tuned high-Q band-elimination filter whose pole-frequency is determined by the same components as the zero frequency.

Many of the known active RC band-stop filters<sup>1-3</sup> require precision passive components with zero temperature-coefficients to achieve satisfactory performance. Further, in a few self-tuned notch filters reported earlier<sup>4,5</sup> the notch response is obtained by subtracting from the input signal the interference-frequency components, derived from a switched RC network. The switching frequency is synchronised to the frequency of the actual interference signal through a clock generator, thereby providing a tracking capability. With this scheme the self-tuning range attained is limited and, furthermore, all the stringent conditions with regard to passive components must be fulfilled. Moreover it is quite complicated, because additional circuitry has to be incorporated to suppress the switching-noise generated and to keep both inputs to the subtracting circuit equal in magnitude and phase at all the tracking frequencies. In this article a relatively simple scheme, which does not require zero temperature-coefficient, precision, passive components, is proposed. It uses the four-amplifier circuit shown in Fig. 1, which is a modified Kerwin Huelsman Newcomb biquad<sup>6</sup>. Self-tuning in such an arrangement involves making the filter frequency-tunable<sup>7</sup> by replacing the frequency determining resistor, R in Fig. 1, by a voltage-dependent resistor, R', shown in Fig. 2, and then locking it to the interference signal V<sub>i1</sub>, by applying phase corrections<sup>8</sup> as shown in Fig. 3.

An analysis of the circuit is given in the Appendix.

## Experimental results

The filter shown in Figs. 1, 2 and 3 was built with dual op-amps and a pair of matched j.f.e.t.s. The phase-correction

system was made up of a LM711C dual voltage-comparator, a CA3028A differential amplifier for temperature compensation of the output levels of the comparator, and a low-pass filter for smoothing the output. The control voltage from the phase correction scheme was used to vary the resistance offered by the f.e.t. The filter was tested for self-tuning and frequency response characteristics. The input signal-levels, V<sub>i1</sub>, and V<sub>i2</sub>, shown in Fig. 1 were kept low enough (100mV) to facilitate linear operation of the f.e.t.

Fig. 4 shows the filter attenuation for different Q<sub>0</sub>s (Q<sub>0</sub>=54.67,100), as the frequency of the interfering signal, V<sub>i1</sub> (self-tuning frequency) is varied. It can be seen that the attenuation decreases slightly as the frequency and Q<sub>0</sub> are increased (see equation (6) in Appendix). Fig 5 shows the frequency response characteristic with the filter self-tuned to the 50Hz mains interference signal, V<sub>i1</sub>, and the incoming physiological data with interference signal present added as V<sub>i2</sub>.

Attenuation of the interfering signal and the self-tuning range of the filter are found to be more than adequate in many applications, as, in practice, the drift in power line frequency is much less than the self-tuning capability of the filter. The filter can be used to suppress any undesired frequency component, in any range, by properly choosing capacitor C in Fig. 1

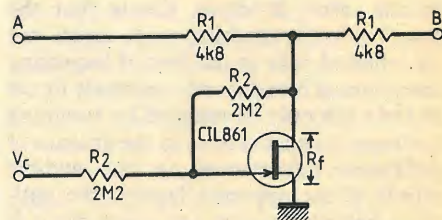


Fig. 2. Voltage-dependent resistor using a f.e.t., to be used for R in Fig. 1. Its value  $R' = (2R_1 + R_1^2/R_f) =$  effective resistance between the terminals A and B.  $R_f =$  f.e.t. resistance, determined by the control voltage,  $V_c$ .  $R_2 =$  resistors for equalising the f.e.t. characteristics.

Fig. 1. Modified biquad circuit, providing band-pass (V<sub>01</sub>), low-pass (V<sub>02</sub>), high-pass (V<sub>03</sub>), and band-elimination (V<sub>04</sub>) functions. V<sub>i1</sub> is the interference signal to be eliminated and V<sub>i2</sub> is the physiological data signal containing the interference-component. ( $\omega_0 = 1/RC$ ) = ideal pole frequency; Q<sub>0</sub> = ideal pole Q; and G = gain of filter.)

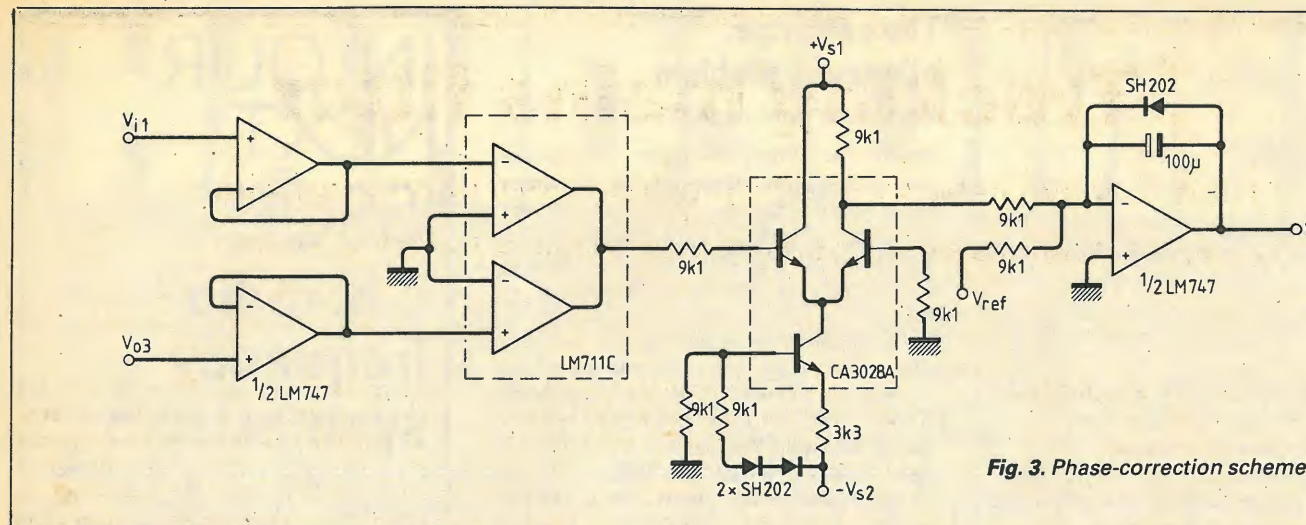
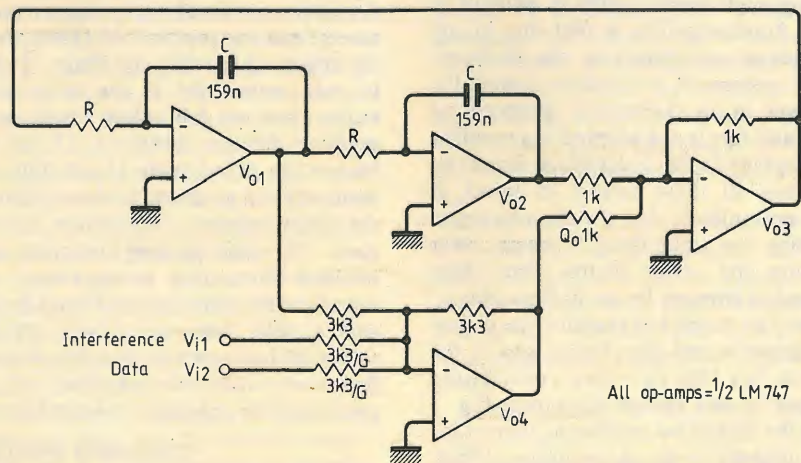


Fig. 3. Phase-correction scheme.

within the limits permitted by the phase correction circuit. This scheme can be extended to suppress the harmonic component of the interference signal also, by adding one more filter of the same kind but self-tuned to the harmonic component to be eliminated. A single phase correction scheme is sufficient to drive both the filters, using a "follow-the-master" principle<sup>9</sup>. In this case, the first filter will have two inputs, V<sub>i1</sub> and V<sub>i2</sub>, as discussed earlier and the second filter will have its input taken from the notch output, V<sub>04</sub> of the first filter. The desired output, devoid of the interference signal and its harmonic component, is obtained from the notch output of the second filter.

In the filter constructed a small amount of jitter is observed at the notch output at 50Hz. This is due to the presence of the 50Hz ripple in V<sub>c</sub>, used to control the f.e.t. To get rid of this, the phase correction scheme in Fig. 3 has to be slightly modified, by replacing the 711 dual comparator by another comparator circuit, shown in Fig. 6. It makes use of two single comparators and an Exclusive-OR gate. The output of the gate has a frequency twice that of the input and therefore can be easily smoothed by the succeeding filter stage in the phase correction scheme. However, the price to be paid is a slight decrease in the attenuation at 50Hz, due to the increase in error introduced by the phase correction scheme, if the comparators used are not perfectly matched. With this modification, using a pair of randomly chosen comparators, the attenuation at 50Hz is found to be about 36.5 dB.

## Appendix: circuit analysis

Considering the finite-gain of the op-amps using the finite-gain model  $A = 1/(A_0 + s/GB)$ , where A<sub>0</sub> is the finite d.c. gain and GB is the finite gain-bandwidth product of the op-amp, and assuming all the op-amps to be identical, the transfer-function of the notch filter with G=1 can be derived as:

$$\frac{V_{o4}}{V_{i1}} = \frac{\left[ \frac{s^2}{\omega_z^2} + \frac{s}{\omega_z Q_z} + 1 \right]}{\left[ \frac{s^2}{\omega_p^2} + \frac{s}{\omega_p Q_p} + 1 \right]} \quad (1)$$

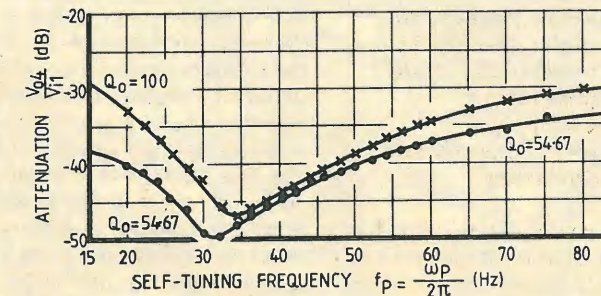


Fig. 4. Attenuation of the band-elimination filter with self-tuning frequency. V<sub>04</sub> = output of filter; V<sub>i1</sub> = interference signal.


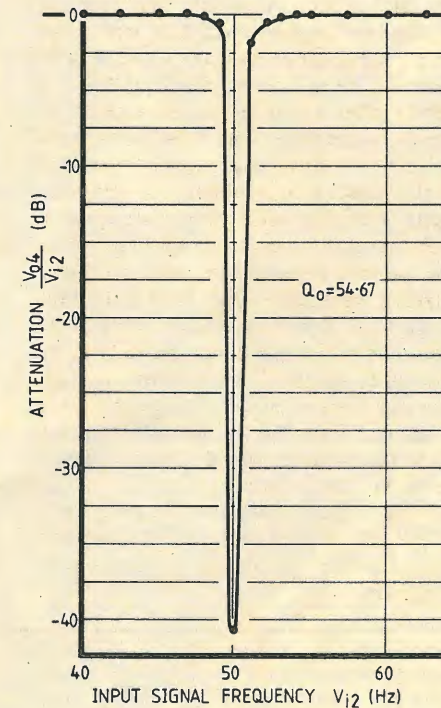


Fig. 5. Attenuation of the filter with frequency of input signal, V<sub>i2</sub>, the filter being self-tuned to the 50Hz power-line interference signal, V<sub>i1</sub>. V<sub>04</sub> = output of filter; V<sub>i2</sub> = physiological data signal with the interference signal present.

Fig. 6. The comparator circuit with Exclusive OR-ed output Y = A ⊕ B.

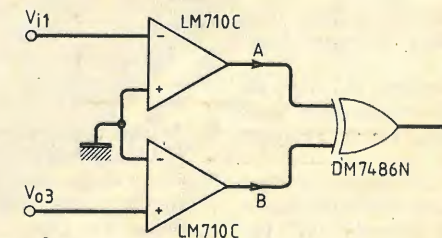

$$\text{where } \omega_p = \left[ \frac{\omega_o}{1 + \frac{4 + \frac{1}{Q_o}}{A_o} + \frac{\omega_o \left(2 - \frac{1}{Q_o}\right)}{GB}} \right]^{1/2} \quad (2)$$

$$\omega_z = \left[ \frac{\omega_o}{1 + \frac{4 + \frac{1}{Q_o}}{A_o} + \frac{2\omega_o}{GB}} \right]^{1/2} \quad (3)$$

$$Q_p = \frac{Q_o}{1 + Q_o \left[ \frac{2 - \frac{1}{Q_o}}{A_o} - \frac{4\omega_o}{GB} \right]} \quad (4)$$

$$Q_z = \frac{1}{\frac{2}{A_o} - \frac{4\omega_o + \frac{1}{Q_o}}{GB}} \quad (5)$$

Taking into account the tuning error,  $\epsilon/2Q_p$ , where  $\epsilon$  is the error due to the phase-detector used in the phase-correction scheme<sup>8</sup>, the equation (1) can be simplified for the self-tuned filter as:

$$\frac{V_{04}}{V_{11}} = Q_p \left[ \frac{\epsilon^2}{Q_p^2} + \frac{1}{Q_z^2} \right]^{1/2} \quad (6)$$

$$\approx \left[ \epsilon^2 + Q_o^2 \left( \frac{2}{A_o} - \frac{4\omega_o}{GB} \right)^2 \right]^{1/2}$$

#### References

1. Wilson, G., A parallel-T based active notch filter, *Proc. IEEE*, Vol. 65, April 1977, pp.580-1.
2. Ananda Mohan, P.V.A., Bridged-T selects filter notch frequency, and bandwidth, *Electronics*, Vol. 52, June 7, 1979, p. 128.
3. Tuladhar, K. K., Tunable active-phase compensated universal biquad, *Electron. Letters*, Vol. 16, January 3, 1980, p. 44.
4. Knott, K. F. and Unsworth, L., Main-rejection tracking filter, *Wireless World*, Vol. 80, October 1974, pp. 375-9.
5. Shchekotov, A. Yu. and Golyavin, A. M., Follow-up rejector filters for the power-line frequency and its harmonics, *Instruments and Expt. Techniques*, Vol. 21, July-August 1978, pp. 1034-7.
6. Tietze, U. and Shenk, Ch., *Halbleiter Schaltungstechnik*, Berlin, Springer-Verlag, 1974, pp. 350-2.
7. Hnatek, E. R., Application of linear integrated circuits, New York, J. Wiley and Sons, 1976, pp. 191-4.
8. Mossberg, K. and Akerberg, D., Accurate trimming of active-RC filters for phase measurements, *Electron. Letters*, Vol. 5, February 1969, pp. 520-1.
9. Radhakrishna Rao, K., Sethuraman, V., and Neelakantan, P. K., A novel follow-the-master filter, *Proc. IEEE*, vol. 65, December 1977, pp. 1725-26.

## The cartridge alignment problem

Continued from page 61

against the 19mm condition; and distortion drops away nicely in the 50-60mm inner groove region. These profiles are based on a figure for  $C$  of 200mm, which seems typical. For other values, overhang should vary in inverse proportion,  $h = k/C$ .

In the case of arms having  $L$  as the fixed dimension, this can be transposed as  $h = \frac{1}{2}(L - \sqrt{L^2 - 4k})$ . For the high-overhang condition as represented by Bauer/Baerwald/Stephenson  $k$  is 3600, assuming an inner radius of 60mm; for the Randhawa proposal (54mm)  $k$  is 3,300; for 10mm overhang  $k$  is 2000; and for the 13mm condition proposed it is 2600.

It remains to formulate a method of evaluating the optimum setting radius, i.e. the radius at which offset angle is the same as tracking angle  $\beta$ . Calculate  $\beta$  for various values of  $C$  and  $h$  at the three controlling radii, i.e. inner grooves, outer grooves and  $R_{\min}$  as  $\sqrt{L^2 - C^2}$ . Then calculate the optimum offset angle from formula 4. Finally, calculate the radii for zero angle error, from formula 1. Plot these radii against  $h$  for various values of  $C$ , and against  $C$  for various values of  $h$ . The resulting curves are practically straight lines over the usable range of  $C$  and  $h$ , which means that the setting radii have the form of a  $y = a + bx$  relationship. The figures obtained are  $R_0 = 79 + (hC/84)$  and  $r_0 = 12 + (hC/71)$ , where  $R_0$  and  $r_0$  are radii for zero angle error. (Strictly speaking, it is undesirable, from the point of view of accuracy, to use two empirical formulae when the product of the two quantities are precisely related (refer to formula 3), and it would be better to evaluate  $r_0$  from the formula  $(L^2 - C^2)/R_0$ . For the proposed rule  $h = 2600/C$ ,  $R_0 = 110\text{mm}$  and  $r_0 = 49\text{mm}$ , for any value of  $C$  within the normal range of say 170 to 230mm. The maximum tracking error distortion can be calculated from the empirical expression  $d(\%) = 210/C$ . Offset angle can be calculated from formula 1, or closely approximated by the empirical expression  $4380/C$ . Using high quality equipment I have been unable to detect any audible difference between the points of maximum tracking error distortion and zero error.

\*"Pickups, the key to hi-fi", by J. Walton (Pitman).

#### Displacement current

Will Mr Lawrence A. Jones, who submitted two articles on displacement current, please write to Martin Eccles, *Wireless World*, Quadrant House, The Quadrant, Sutton, Surrey or ring 01-3500, extension 3589.

## IN OUR NEXT ISSUE

### C.b. radio frequency synthesizers

Direct and mixer-type frequency synthesizers are described by Dr E. F. da Silva of the Open University. Points for and against each type are mentioned and there is a practical circuit design for a mixing synthesizer to cover the 40 c.b. channels.

### Display aid for micro-processors

This is a device designed by Prof. K. Padmanabhan of Madras University which enables a simple oscilloscope to display the values of digitized signals in alphanumeric form, complete with software-generated annotation.

### Cartridge alignment gauge

R. J. Gilson presents a simple device which plugs into the stylus position of a pickup cartridge to enable the correct position to be set up more easily than with a protractor.

On Sale  
October 21

# HANDSOME!

First there was the 130. A handheld D.M.M. which still sets the standards our competitors strive to match. Next came the 131. The introduction of the 135 saw 4½ digits on a handheld D.M.M. for the very first time.

And that same commitment to innovation has resulted in the latest additions to the range. The Keithley 128 D.M.M. with audio-tone and 870 Digital Thermometer with centigrade and fahrenheit readout.

The result is an unrivalled selection of handheld measuring devices. Each specification carefully matched to a given need. With performance that looks pretty good on paper. And even better in the field!



- Model 870 ● 0.025% accuracy ● Centigrade and Fahrenheit ● up to 200°C ● 0.1° resolution up to 200°C
- Model 135 ● 0.05% accuracy ● Full overload protection ● ACU bandwidth to 20 KHz ● adjustable threshold ● 25 ranges: 5 functions ● 10 amp span
- Model 131 ● 0.25% accuracy ● 25 ranges: 5 functions ● 10 amp span
- Model 130 ● 25 ranges: 5 functions ● 10 amp span ● 0.5% accuracy

All models are guaranteed accurate for one year. And built to the high standards of quality expected of the Keithley name. For more information simply fill in the coupon. And learn about a range which will serve you . . . handsomely!

## KEITHLEY

Keithley Instruments Ltd  
1 Boulton Road Reading Berkshire RG2 0NL  
Telephone (0734) 861287  
Telex 847047

Also available from  
I.T.T. Instrument Services, Tel. Harlow 29522

WW - 054 FOR FURTHER DETAILS

I would like to know more about your Handheld Units.  
Please send me details on  D.M.M.'s  870 Thermometer

Name \_\_\_\_\_ Position \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
Telephone \_\_\_\_\_

# Accurate readings faster- with AVO auto-ranging dmm's

## AVO DA117

The AVO DA117 is an auto-ranging instrument that's really fast. On dc and resistance ranges, the response time is less than 1 second; to an accuracy of  $\pm 0.5\%$  of reading  $\pm 1$  digit! This compact dmm features a  $3\frac{1}{2}$  digit lcd with a range hold (or range up or down) facility. Measurements can be made up to 1000V, 10A and 20M $\Omega$  and there is a special Junction Test range for diodes and transistors.



AVO DA118 - Suitable for mains (10/240V ac) battery power (with auto-charge-over), the DA118 offers five functions with a basic 0.3% accuracy all fully protected against overload. The response figures for the DA118 are as fast as its portable counterpart and the manually selected 20mV range gives a resolution of 10 $\mu$ V.

From on-site servicing to laboratory bench applications - AVO meet them all! Contact any of our distribution outlets or call us direct for further detailed information.



AVO LIMITED, Archcliffe Road, Dover, Kent CT17 9EN. Tel: 0304 202620. Telex: 96283.



A Member of the THORN EMI Group

WW - 069 FOR FURTHER DETAILS

Elliott Electronics Ltd., Leicester 0533-553293

F. Blakley & Sons Ltd., Heywood 0706-65087

F.P. Tools Ltd., Motherwell 069-65672

Horizon Electronics, Glastonbury 0458-33


Ibis Electronics, Wokingham 0734-79

Batvale Marketing, Ely 0353-77, Ely 0353-77

For your FREE Catalogue Send 30p to cover P&P

## NEW DISTRIBUTORS WANTED ENCLOSURES

An attractive metal enclosure with adjustable card guides, cover plates are blue PVC clad for appearance & durability

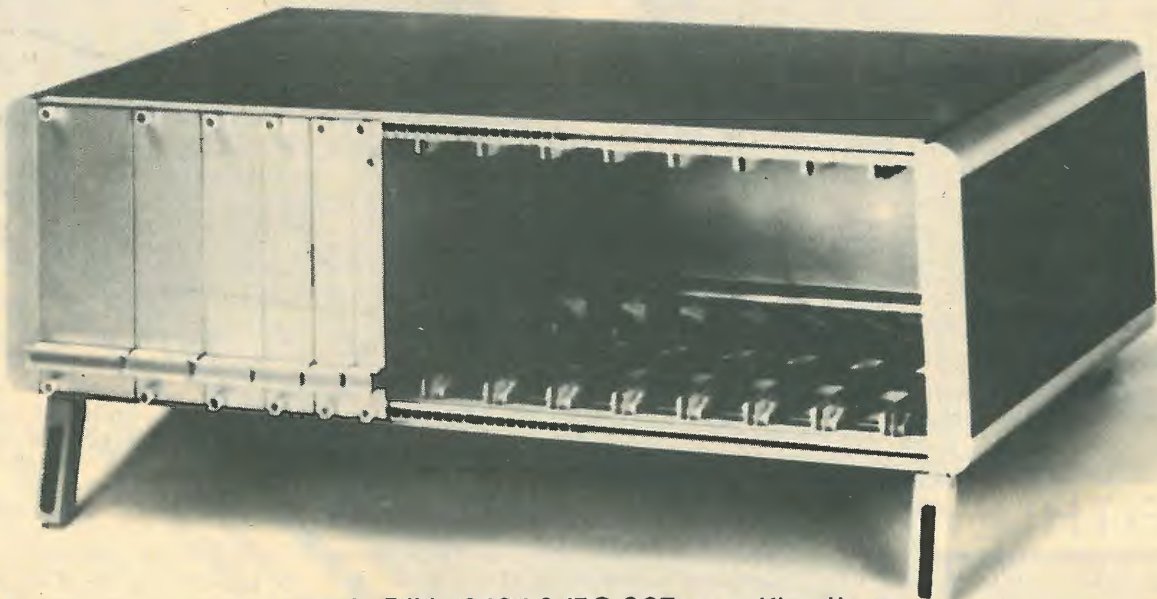

meets DIN 41494 & IEC 297 specifications

**ELECTROWARE\***

DUTTON LANE EASTLEIGH SO5 4AA TEL(0703)610944/5

AVAILABLE FROM ALL LEADING ELECTRONIC DISTRIBUTORS

Neltronic Ltd., Dublin 510845  
Cobbles Ltd., London. 01-699-2282  
Microdigital Ltd., Liverpool. 051-227-2535  
Electronica CG Ltd., Manchester. 061-788-0656

Spectron Electronics (Manchester) Ltd., Salford. 061-834-4582

Jee Distribution Ltd., Middlesex. 01-897-3429

Watford Electronics Ltd., Watford. 0923-37774

Technomatic Ltd., London. 01-452-1500

Interface Components, Amersham. 02403-2  
New Bear Computing Store, Newbury. 0635-3

Tran

London. 01 405

A. Marshall (London)

London. 01-624

Interface Components

Amersham. 02403-2

New Bear Computing Store

Newbury. 0635-3

# Long-distance television reception

2 - Why tv signals sometimes cover long distances

by Keith Hamer and Garry Smith

This month the authors discuss the theory behind various conditions under which the range of tv transmissions are extended and - what is more important to the prospective DX-tv enthusiast - how to look for, identify and make the best use of these conditions.

Temporary effects caused by certain weather conditions, meteor showers and even lightning can affect the distance over which tv signals can be received. In this article we will take a closer look at some of the conditions briefly discussed in the last article and some others not previously mentioned. We hope that experienced DX-tv enthusiasts will bear with us for the benefit of newcomers to the hobby as we intend to cover news and development in the field in subsequent articles. For readers who missed the first article, DX-tv is an abbreviation for long-distance television reception.


## Tropospheric propagation

This is probably the easiest propagation mode for the newcomer to DX-tv to experiment with as, provided one is not interested in receiving sound channels, a standard u.h.f. tv set can be used to pick up signals from the Continent if the aerial is pointed in the right direction.

The troposphere extends from the surface of the earth to around 7600 metres above and within it atmospheric pressures vary in different areas. From time to time, slow-moving areas of above normal pressure can occur (anticyclones). Clear blue skies by day and clear but cold nights are often associated with high-pressure areas, but sometimes a high-pressure area together with a low-pressure zone can exist that leads to conditions normally associated with winter.

Assuming that the weather condition is purely anticyclonic, a noticeable improvement in the strengths of usually weak signals will be experienced. Long-distance signals will be at their best on the u.h.f. bands (Bands IV and V) in the early morning and late evening. If you pick up an unfamiliar programme during this atmospheric condition, the first sign that it may come from overseas is a picture without sound. Table 1 reveals that other European television services have different sound channel spacings to the one we use, system I.

A picture without sound does not

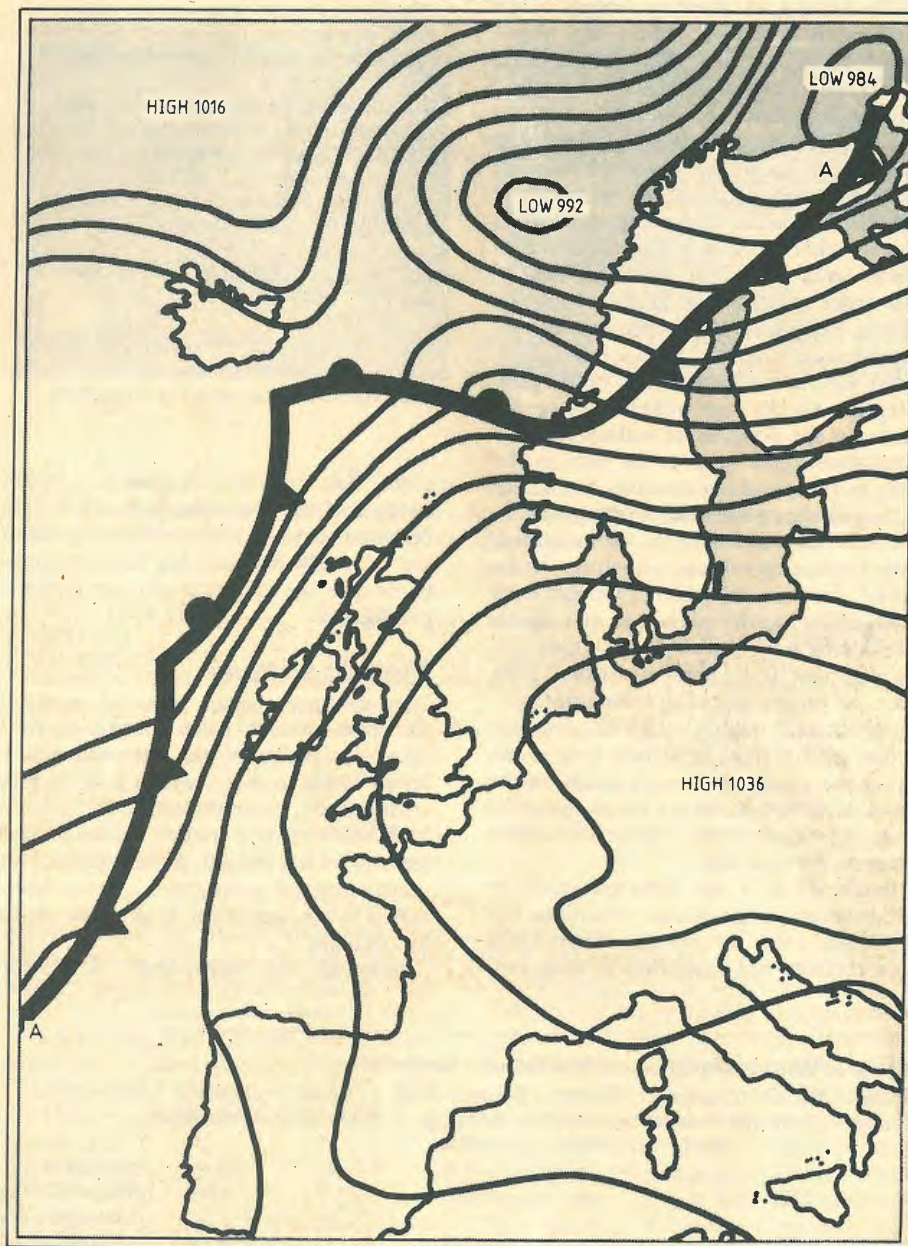

necessarily mean that the signal you are receiving comes from the Continent but by looking through programme guides or briefly tuning into the British transmitters you can usually make certain by a process of elimination. Many European stations transmit the test card - the easiest means of identification - for a few minutes after close down, in the early morning and sometimes even all through the night.

A cold or occluded front at the boundary of the high-pressure region can increase the range of tv signals even further. In October of 1975, an exceptionally good

Fig. 1. In October of 1975 the weather conditions shown here produced very good tropospheric reception conditions and signals from some 850 miles away were received in the UK.

'opening' in the UK allowed signals transmitted some 850 miles away to be received. Figure 1, kindly supplied by the Meteorological Office, is a weather chart for that period showing the high-pressure region over central Europe and the associated front, line AA.

Daily weather forecasts on BBC-1 are a means of keeping watch for tropospheric propagation conditions, as the Atlantic chart is always shown for a few moments and approaching high-pressure areas can be monitored. More detailed information can be obtained by taking out a subscription for weather charts from the Meteorological Office in Bracknell.


During anticyclonic weather conditions, the earth warms up in the daytime because of lack of clouds and for the same reason the heat built up escapes quickly in the evening. Tropospheric propagation is often greatly enhanced by a frequent result of this heating and cooling process called temperature inversion, where the troposphere forms a waveguide for directing signals above around 70MHz.

Reception under tropospheric-propagation mode conditions tends to be best in a path parallel to the isobars (lines showing where atmospheric pressures between low and high-pressure areas are equal) on weather charts. As a high-pressure area moves away from you reception will be best from transmitters in line with the trailing edge of the area by means of tropospheric ducting.

Yet another indication that Continental reception via the troposphere may be enhanced is the presence of widespread fog. Conditions again tend to be best in the early morning and late evening, but fall off as the sun warms the lower troposphere.


Under the conditions so far described, long-distance signals can sometimes be received for several days. Tropospheric propagation has the advantage that signals received by it are not subject to rapid fading and that little phase-distortion takes place, so programmes can sometimes be of 'entertainment quality'. The disadvantage is that irregularities in terrain tend to obstruct the signal path: enthusiasts on the east coast of Britain have a better chance of receiving signals from Europe than those living on the west side.

Bands III to V are most enhanced by advantageous tropospheric conditions but even Band I can be affected. Programmes most received will come from France, Bel-

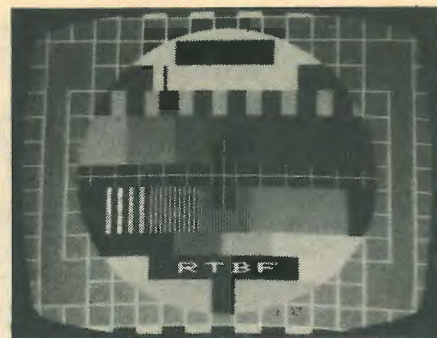

(a)

(a) Radiodiffusion-Télévision Belge's (Belgium's French-language service) PM5544 electronic test-pattern received in the UK by tropospheric propagation.

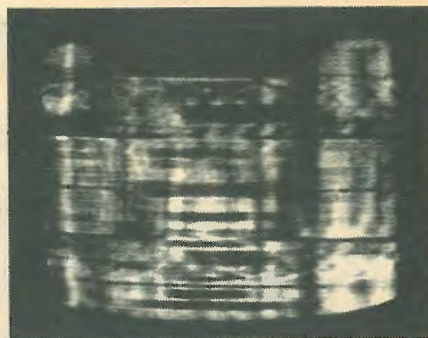

(b)

(b) Ionized F2 layer conditions caused reception of this picture in the UK from the USSR's TSS service close to the Chinese border on channel R1 (49.75MHz vision). The image shown features distortions typical of pictures received by F2 propagation.

(c) The origin of the image shown above, the TSS "0249" test-card.

(d) A PM5544 test pattern on channel E3 (55.25MHz vision) received by F2 propagation. This picture is thought to

gium, East and West Germany, Luxembourg and the Netherlands but it should be noted that good tropospheric openings are relatively few and far between compared with the frequency of other forms of propagation.

### Meteor shower

Long-distance signals can be received for short periods when meteor showers cause ionization of the atmosphere's E layer. These meteors, which may be very small indeed, move through the E layer at high velocities and friction causes ionized trails to be left behind. Meteor-shower (or meteor-scatter) propagation, often abbreviated to ms, can occur at any time of the day or night.

Although the occurrence of meteor

have come from an Arab Emirate country some 4,500 miles away.

(e) A Voice of Kenya (VOK) news caption received via trans-equatorial skip in September '80.

(f) An official VOK station identification

(g) Ghosting associated with sporadic E reception is shown in this photo of an image from Sveriges-Radio (SR-Sweden). Signals received during sporadic E can, however, be very clear and last for several hours.


(h) A further example of reception possible through sporadic E showing TVE (Television Española) on channel E2 (48.25MHz vision).

showers in any 24-hour period is random there are certain times of the year when meteor showers appear more frequently. Details of these annual periods can be found in certain astronomical handbooks. Table 2 gives a rough guide of the best times of the year to look for long-distance signals as far as meteor-shower propagation is concerned.


It is not possible to predict the direction from which signals enhanced during meteor showers might come from and, as the effects of a shower usually last for only a few seconds, identification of the transmitter is difficult. Band I signals are most likely to be improved under this mode of propagation but sometimes intense ionization in the E layer can improve reception on Band III channels.

Table 1: World television transmission standards


System code	No. of lines	Channel bandwidth (MHz)	Vision bandwidth (MHz)	Sound/vision spacing (MHz)	Vision modulation	Sound modulation	Regions
A	405	5	3	-3.5	+	a.m.	UK, Eire (v.h.f., to be phased out within the decade)
B	625	7	5	+5.5	-	f.m.	Western Europe, Albania, parts of Africa, Middle East, Australasia (v.h.f.)
C	625	7	5	+5.5	+	a.m.	Luxembourg (v.h.f.)
D	625	8	6	+6.5	-	f.m.	Eastern Europe, Albania, USSR, China (v.h.f.)
E	819	14	10	±11.15	+	a.m.	France (v.h.f., possibly changing to system L on v.h.f.), Monaco (v.h.f., 625-line scanning)
G/H	625	8	5	+5.5	-	f.m.	Western Europe (u.h.f., system G), Belgium, Cyprus, Greece, Israel, Malta, Yugoslavia (u.h.f., system H with 1.25MHz vestigial side-band), Monaco (u.h.f., system G)
I	625	8	5.5	+6	-	f.m.	UK (u.h.f.), Eire (v.h.f./u.h.f.), Rep. of S. Africa (v.h.f./u.h.f.), some Central African countries (v.h.f./u.h.f.), Hong Kong (u.h.f.)
K	625	8	6	+6.5	-	f.m.	Gabon (v.h.f.), Eastern Europe (u.h.f.), French Territories (system K)
L	625	8	6	+6.5	+	a.m.	France, Luxembourg, Monaco (u.h.f.)
M	525	6	4.2	+4.5	-	f.m.	N. and S. America, Caribbean, parts of Pacific, Far East, US Forces (AFRTS), Japan
N	625	6	4.2	+4.5	-	f.m.	Argentina, Bolivia, Paraguay, Uruguay

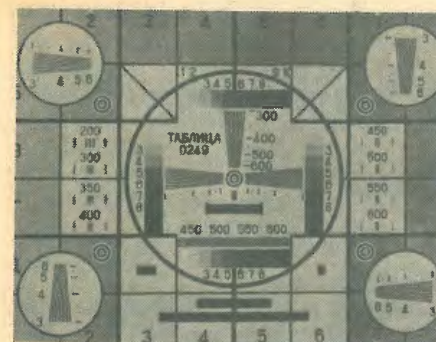

(c)

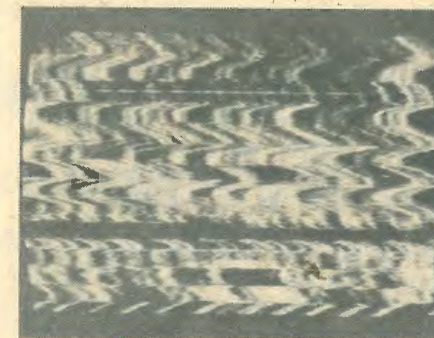

(d)

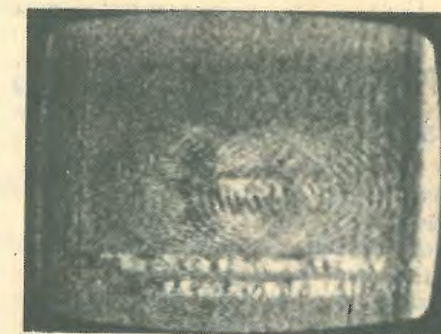


(e)



(f)



(g)

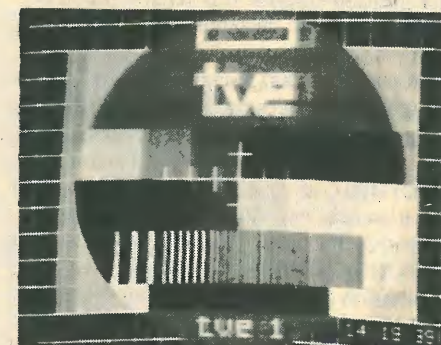

(h)

### Lightning flash

During severe thunderstorms lightning causes the atmosphere to become highly charged, thus causing incident-signal reflection. With this form of propagation, both v.h.f. and u.h.f. transmissions may be enhanced. For optimum results the lightning should occur mid-way between the transmitter and receiving site. Conditions may initially be monitored by listening to the radio, since lightning causes interference, especially in the long-wave band.

### Auroral reflection

From time to time, particularly around the equinoxes, there are periods of intense solar activity. Solar flares erupt and cause vertical r.f. reflecting sheets within the earth's atmosphere due to magnetic disturbance and ionization of the D, E and F layers. Visual evidence of such disturbances is the Aurora Borealis or "Northern Lights" ("Southern Lights" in the southern hemisphere). In the northern hemisphere, the charged particles emitted by the solar flares spiral towards the earth and are concentrated at the auroral zone. Hence, television signals are received from a northerly direction irrespective of the location of the transmitter. It follows that aerials should be directed northwards.

A rumbling or 'sleigh-bell' effect on sound and horizontal bars on vision are associated with signals propagated by auroral reflections. It is possible to receive trans-Atlantic transmissions during exceptionally high solar-flare activity. Signals received tend to be of poor quality but nevertheless auroral reflection (ar) is an interesting form of propagation. Due to the rotation of the sun, there is a tendency

Table 2: Approximate annual meteor-shower periods. Between the dates given here long-distance reception aided by meteor-shower ionization in the atmosphere is most likely.

Meteor shower name	Beginning	End	Chances of long-distance reception
Quadrantids	Jan. 3	Jan. 4	average
Lyrids	Apr. 19	Apr. 22	moderate
Aquarids	May 1	May 13	good
Perseids	July 27	Aug. 17	best
Orionids	Oct. 15	Oct. 25	moderate
Taurids	Oct. 26	Nov. 16	average
Leonids	Nov. 15	Nov. 17	unpredictable
Geminids	Dec. 9	Dec. 13	good

for recurrence of auroral reflection after approximately 27 days. Normally only Bands I and II are affected so far as video reception is concerned but Band III channels may well suffer from severe noise-distortion of the type mentioned above. Usually auroral reflection manifests itself during the mid-afternoon and recurs later in the evening.

### F2 propagation

During intense solar activity, the F2 layer becomes ionized and reception from tv transmitters over 2000 miles away is possible. The F layer divides into two belts in the daytime; the F2 layer forms the outer belt at about 200 miles above the earth's surface. During recent solar activity Australian television signals have been received several times in the UK.

F2 layer reception occurs when solar activity is at a maximum in cycles of approximately eleven years. An observation of the sun's surface will indicate whether F2 (and also auroral reflection) reception is likely as magnetic storms in the sun's photosphere, visible as sun spots, are responsi-

ble for the ionization in our atmosphere that causes radio waves to be reflected. To avoid damage to the eyes look at the sun through a piece of smoked or filter glass, or project its image onto a piece of white card: never use a telescope or binocular.

Theoretically, F2 reception is best when it is noon at a point mid-way between the transmitter and receiver. In our experience during the present sun-spot-cycle peak, signals from the Far East are noted soon after sunrise. Reception from Australian stations on channel 0 (vision frequency 46.25MHz) has also been reported at around this time. Signals from central Russia will be received towards mid-morning. During December 1979, trans-Atlantic signals were received on many days from shortly after mid-day until late afternoon. African signals, thought to have originated from central countries and Zimbabwe, have also been received, mainly during the equinoxes and after mid-day. Reception from the south was noticeably weaker than that from east and west. An interesting point which several enthusiasts have noted about F2 reception, especially

in the early morning, is that signals tend to increase from zero to maximum strength within the space of a few minutes.

### Trans-equatorial skip

As sunset approaches, the F1 and F2 layers break up and merge to form a single layer at an altitude of approximately 250 miles. As the F2 layer disintegrates another effect can occur known as trans-equatorial skip (normally abbreviated to te). Reception usually occurs within a limit of 40° north or south of the equator. Signal quality is similar to that experienced with F2 layer propagation, that is, distorted with multiple images. It is often difficult to decipher signals received by these two modes but where there is a possibility of 'double-hop' paths, reception of transmitters at vast distances can be achieved. Normally, only Band I is affected.

### Sporadic E

Every year between May and September (in the Northern Hemisphere), many part-time DX-tv enthusiasts come out of winter hibernation for the "sporadic E" season (sporadic E is abbreviated to sp.E). As many readers will know, short-wave radio communication is possible due to reflection in the various layers, including the E layer. This particular layer lies approximately 75 miles above the earth's surface and, although it is capable of reflecting short-wave signals, television signals normally pass straight through it. However, during the summer months the E layer becomes highly ionized. If the electron density is sufficiently high, Bands I and II signals will be reflected.

Patches of ionized gases within the E layer move about at great speeds, sometimes approaching 300 mile/h. Several transmissions can be received simultaneously on the same channel, the stronger and more stable signal being accompanied by one or more 'floaters'. But signal bandwidth can be severely restricted and sometimes strong video will be present without sound and chroma signals. We have noticed a tendency for the lower Band I channels to suffer more from this peculiarity than channels above around 60MHz.

As the name suggests, sp.E reception is very sporadic and can occur at any time of the year either day or night, although conditions are less favourable outside the main season. Sp.E cannot be relied upon for entertainment-quality signals and the countries likely to be received cannot be predicted. Reception via sp.E in Band II tends to be more stable and resembles that enhanced by tropospheric propagation. Signals are normally received within 1,000 miles of the transmitter although double-hop or even multi-hop sp.E is possible. At times during the sp.E season, signals from Zimbabwe (ZTV) have been received, usually in the later afternoon. These were assumed to have been propagated by a combination of trans-equatorial skip and sporadic E as Italian television transmissions were normally present simultaneously.

Depending on the state of the E layer, reception can last from a few minutes to several hours. Extremely low-power transmitters can be received via sp.E and it is possible to receive virtually every national television service operating in Europe. Some Middle East countries can also be received within the UK, notably Jordan (JTV). A survey conducted by us (published in the EBU Technical Review, October 1979) revealed that the USSR television service, TSS, was the most commonly received station for this location. Signals from the USSR could easily be received with good picture quality using nothing more than a length of standard wire for an aerial. So for sp.E signals, the minimum of extra equipment will suffice. For serious DX work, however, an external aerial mast is recommended with facilities for rotating the aerial(s).

## Another engineer persecuted in USSR

Following our report on the detention of two electronics workers in the USSR (News, July issue) we have been told of a further case by Dr Yosef Ahs, a hospital anaesthetist who was born in the USSR but now lives in Israel. This is Boris Chernobilsky, aged 37, a Jewish radio and electronics engineer from Moscow. He used to work in a high-security institute, possibly on radar. Like Fridman and Brailovsky (July issue) he applied for a visa to emigrate to Israel but was refused on the grounds of "secrecy". That was in 1975. Since then Chernobilsky, his wife Elena (also a radio engineer) and their two daughters have been constantly harassed by the KGB. In October 1976 he went with a number of other Refuseniks to the offices of the Praesidium of the Supreme Soviet where they hoped to find out why they were being refused visas and for how



Boris Chernobilsky

long they would be refused. Instead of being received, the men were rounded up and taken to a site outside Moscow where they were beaten. Two of them, Dr Ahs and Chernobilsky, were detained while the others were set free. They were held in prison for 22 days for "malicious hooliganism". Dr Ahs was allowed to leave for Israel in 1978. Chernobilsky has not been able to work in his profession, in spite of efforts to obtain employment in the general field of radio, and so has been working as a plumber in order to support his family. The Chernobilskys' flat has been searched and they were threatened with arrest more than once.

On 10th May 1981 a number of Jews set out to an area near Moscow called Opalikha to have a picnic to celebrate Israel's Independence Day. Towards the end of the picnic, militiamen who had been standing nearby told the Jews to move. There was an acrimonious argument involving Chernobilsky. Everyone went home without incident, but several days later Chernobilsky received in the post a summons to report to the police station. As there was no mention of why he was being summoned, he did not report. In early June he disappeared for two days - he had been picked up by the police and held overnight. At the end of the first week in June he returned home after having signed an undertaking that he would not leave Moscow.

A criminal file against Chernobilsky has been compiled under which he is alleged to have violated Article 191-1, "resisting the police". The indictment claims that he was asked to give his name and produce his internal passport in Opalikha but refused to do so. The file was due to be completed by the end of June 1981 and then Chernobilsky was expected to be brought to trial.

Under very favourable sp.E conditions transmissions on Band III may also be received so when reception on Bands I and II is good, make a check on the lower-frequency channels of Band III. For newcomers to DX-tv who are mystified by references to Bands and channels, all will be revealed in the next article when we will be covering channel allocations.

### Acknowledgements

The authors would like to thank Mr Fish of the Met. Office for supplying the weather chart and Mr Sturgess for the meteor shower periods shown in Table 2.

*A slightly more detailed version of Table 1 will be published in the 1982 WW diary with up-dates provided by the European Broadcasting Union.*

# Royal Wedding — a sound spectacular

BBC sound broadcasting and recording at St. Paul's.

by John Flewitt B.Eng., MIEE, BBC Engineering Information Department

**An estimated 1000 million people were provided with sound from St. Paul's Cathedral during the Royal Wedding. BBC engineers had not only to arrange a variety of mono and stereo sound feeds for broadcasting on radio and television, but also to cope with both stereo and surround-sound for BBC recordings. This article explains how it was done.**

Engineers from BBC Radio Outside Broadcasts rigged 57 microphones to bring the sound of the wedding service to the worldwide audience, including listeners to ILR and viewers of ITV. The sound was fed to the BBC sound control room in St. Paul's Crypt, where a 64-channel mixer produced a 'clean' feed of stereo sound (i.e. sound without the commentaries) and a second 'mixed feed' mixer added the commentaries to produce feed for BBC Radio 4. BBC Television carried out their own sound mixing and other broadcasting organizations either took direct microphone feeds or outputs from one of the mixers.


The needs for producing various sound recordings had also to be considered: BBC Enterprises needed a clean feed of sound for their commercial disc and cassette released soon after the wedding and two digital recordings were made, one of clean feed sound and the other including the BBC Radio commentary. And, as a completely separate exercise, a surround-sound recording was made.

All in all, the whole operation had the largest number of stereo o.b. routings for any BBC broadcast: in addition to the eleven radio commentary positions along the processional route, roving radio links on the day provided interviews with the public and sounds of street celebrations to create a wide spectrum of sound for BBC Radio.

### Microphone installation


Detailed engineering planning began as soon as the wedding was announced. Much of the microphone placing in the cathedral was based on past experience but, on this occasion, the use of the Bach Choir and the large orchestra positioned in the north transept was something more ambitious than anything done previously.

Planning the sound in the cathedral was the responsibility of the BBC's Senior Sound Supervisor, Harold Kutscherauer.

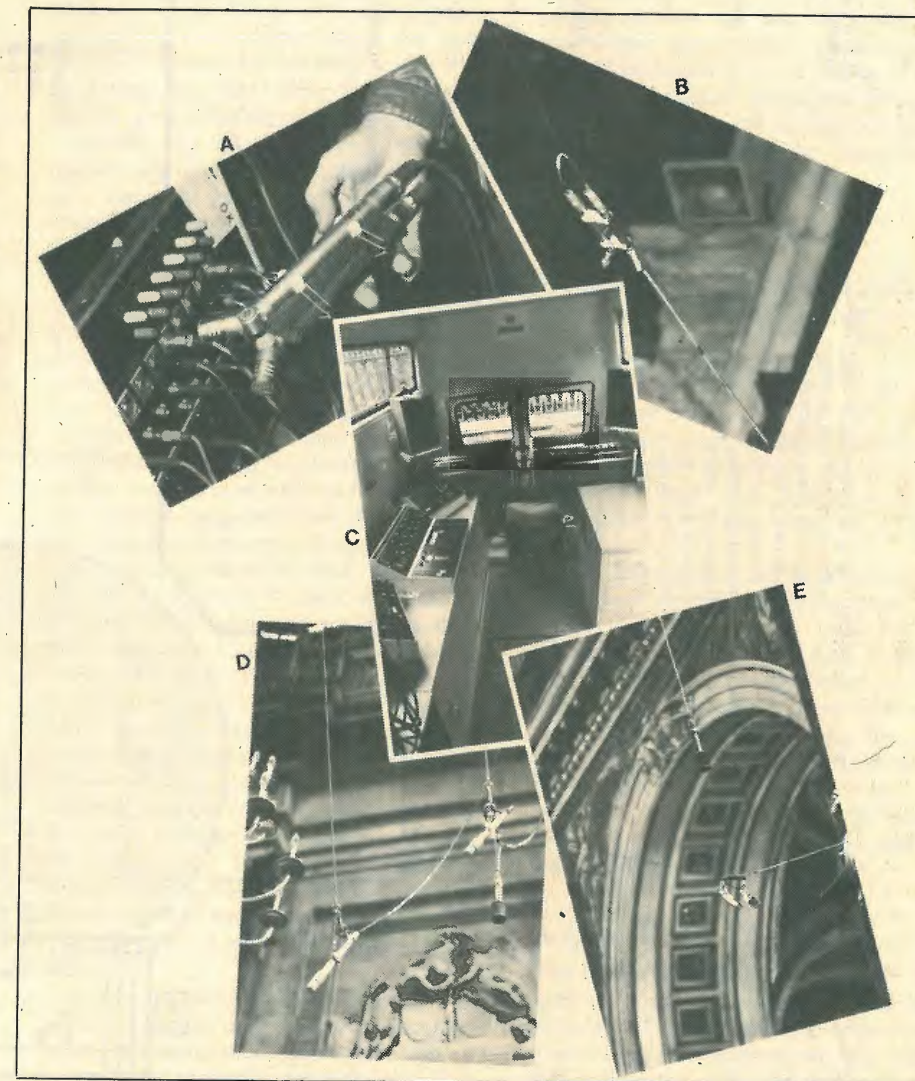

He arranged coverage around twenty stereo capacitor microphones (mostly coincident pairs), eleven of which were mounted on slings and others suspended on strengthened cables from the 70 ft high triforium gallery of the cathedral. The main internal 'sound stages' to be covered were the dais and the altar for the marriage ceremony itself, the Cathedral Choir and Kneller Hall trumpeters in the chancel, the State Trumpeters in the Whispering Gallery and by the west door, the orchestra and Bach Choir in the north transept, the organ speaking in the north-east quarter-dome and above the west door, and the cathedral bells. An external stereo pair was suspended from the west portico to catch the west door trumpeters immediately below, sounding their fanfare on the arrival

*A — Portico microphone; coincident pair before insertion into windshield. B — Coincident pair mounted in chancel for cathedral choir. C — Interior of BBC's digital recording van: the mixer and monitoring equipment is on the left and beyond are the two video recorders adapted to record digital sound by the 16-bit p.c.m. unit underneath. D — Main and spare stereo mics for the orchestra are left and top right suspended in north transept; below on right is a sound field microphone. E — One of the microphone positions in the cathedral: at the top a sound field mic and below a stereo pair.*

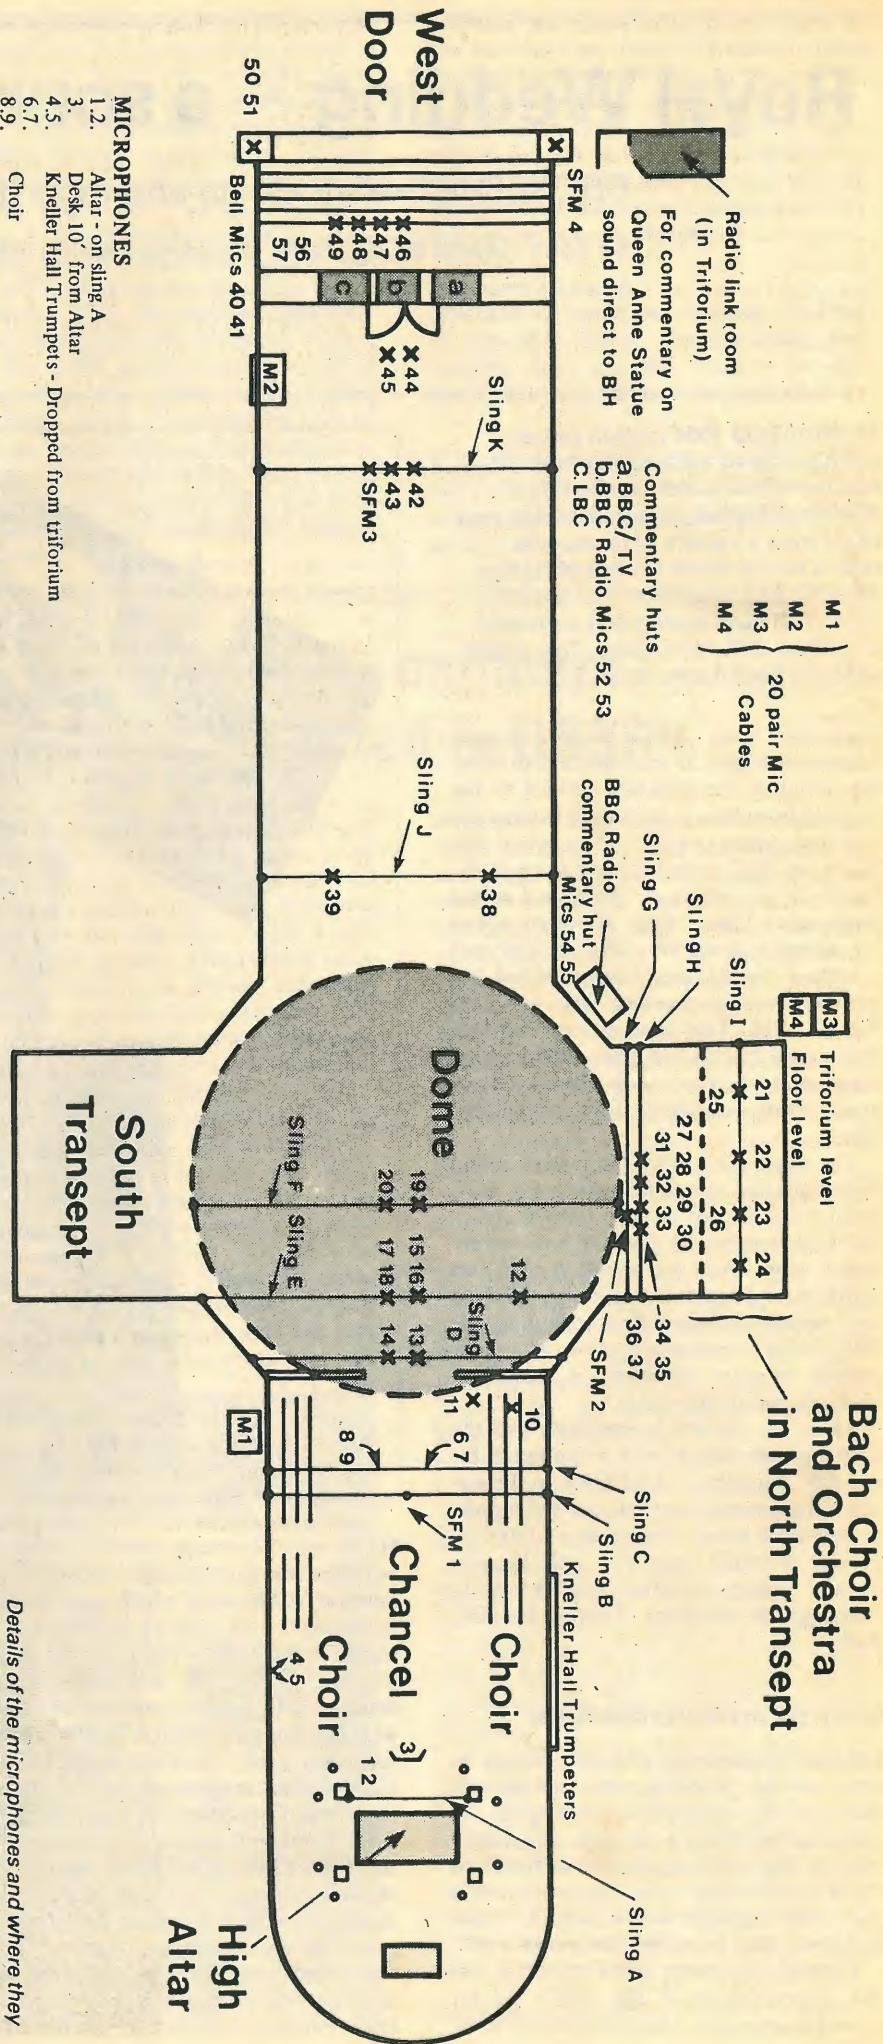

- MICROPHONES**
- Altar - on sling A
  - Desk 10' from Altar
  - Kneller Hall Trumpets - Dropped from triforium
  - 
  - 
  - 
  - 
  - 
  - 
  - 
  - Officiant - attached to desk
  - Lesson - attached to rail
  - Organ - on sling E
  - Dais - marriage ceremony - on sling D
  - Main stereo - on sling E
  - Spare stereo - on sling E
  - Whispering gallery - state trumpeters - on sling F
  - 
  - 
  - Bach Choir - sling I
  - 
  - Haps - on stand
  - Tympans - percussion - on stand
  - Woodwind
  - Basses - on short rhythm stand
  - Solo trumpet
  - Solo soprano
  - Chamber organ
  - Main orchestral stereo mic - sling H
  - Spare orchestral stereo mic - sling H

- Congregation mics - on sling J
- Bell mics - table stand
- West organ - sling K
- West door - state trumpeters - dropped from triforium
- Fx on pillar - west portico
- Fx (standby) west portico
- Fx - with windshield on SW lantern
- Radio commentators lips - hut 2
- Radio commentators lips - hut in NW quarter dome
- Portico trumpet mics
- Sound field mic 1 dropped vertically from sling B
- Sound field mic 2 on sling C
- Sound field mic 3 on sling K
- Sound field mic 4 in N.W. lantern

Details of the microphones and where they were placed in St. Paul's Cathedral. As an aid to musical timing a closed-circuit television camera was focused on the orchestra conductor, and pictures of him were presented on monitors to the organist (who also had headphones) and to the conductor of the Kneller Hall trumpeters.

of Lady Diana. The remaining complement consisted of spot microphones for soloists and sections of the orchestra and choir, and lectern positions for the ceremonial.

When it comes to siting microphones in St. Paul's, the problems are more physical than acoustical. The cathedral's good-natured acoustics and the use of 'close-mic' techniques ensure that sound levels rarely rise high enough to excite any troublesome echoes. The three requirements borne in mind when siting for this particular event were:

- primarily, to provide complete coverage, bearing in mind the sound radio presentation. Radio listeners, lacking any visual component, easily become confused when any of the action inadvertently wanders beyond microphone coverage;
- to make the microphones unobtrusive to a television audience without sacrificing sound quality. An example of this was the siting of the Cathedral Choir microphones on either side of the chancel instead of choosing the classical midway positions (the black finish of some of the microphones helped make them less conspicuous);
- to provide tighter control of balance by the use of spot microphones. This gave the television sound mixers the useful option of favouring the sounds of small groups of orchestral performers, for instance, when they were being shown in close-up by the cameras.

Virtually all microphones were capacitor types, used in cardioid configuration, and most routed signals down to the crypt control room on 20-pair cables. Certain key microphones were individually cabled as an extra precaution against a multipair failure.

**Control and mixing**

In the control room, each microphone's signal was fed firstly to a splitter, one output of which was taken to the clean-feed 64-channel mixer, a second to a 'ceremonial' bay\* and, in the case of speech microphones, a further feed was taken to the cathedral's public address system. The outputs of the 'ceremonial' bays provided both direct microphone signals, for BBC Television and Thames Television, for example, and a mixed feed to BBC Broadcasting House for the radio network and other purposes.

For large ceremonies, it is normal practice in BBC Radio for two mixers to be installed where possible. The mixers are used in adjacent but acoustically isolated rooms, as they were on this occasion in the crypt. This isolation enabled the mixer at the 'clean feed' desk to concentrate more fully on balancing the ceremonial. The 'clean feed' desk output was then fed to the 'mixed feed' position where the operator mixed the commentators' microphones using cues from talkback.

\* 'Ceremonial' bay is BBC parlance for a type of microphone distribution amplifier used chiefly on ceremonial occasions - hence its name. Each bay will handle nine microphone inputs and each input has two buffered outputs.

**Recording the wedding**

This sonically grand occasion also gave the impetus to make two extra forms of sound recording, over and above the standard analogue ones.

In the first instance, two experimental digital recordings were made, one of clean-feed sound carried out in the BBC's digital recording van parked in the Cathedral Churchyard, the other of mixed-feed sound, undertaken at Broadcasting House.

The digital van was equipped with twin video recorders with a 16-bit pulse-code-modulation unit plus the normal sound monitoring and mixing facilities. Previous problems with tape drop-outs, more noticeable in digital recording, are now largely overcome by ensuring a dust-free recording area and using only highest-quality, pen-tested recording tape.

Finally, the surround-sound recording project was undertaken by BBC engineers as a technical experiment to aid British industry. Four sound-field microphones of an improved design were specially loaned for the event, three being used internally in the cathedral to cover the chancel, north transept and the nave towards the west door. The fourth was mounted near the cathedral steps in the north-west Lantern. The four component outputs from each microphone were separately assigned to individual tracks of a 24-track recorder without any form of surround-sound coding. Special noise-reduction devices were ruled out by interference from nearby thyristor lighting dimmers and, instead, a higher tape speed of 30 i.p.s. was used to improve signal/noise ratio. A problem then arose with sound linking on tape changers, since at this high speed each reel of tape ran for only 30 minutes. This was overcome by arranging changeovers to occur during pauses in the wedding service or, at least, on non-musical items, and further arranging for a standby two-channel recorder to make a linking recording in HJ-coded stereo. These stereo recordings would then suffice in any subsequent System HJ matrixing to bridge the gaps in the multichannel surround-sound recording.

Setting the sound-field microphones was relatively simple: each unit's four encapsulated microphones, combined with a microphone processor, gave the system a unique versatility enabling an extremely

"Mixed-feed" mixer in BBC control room in cathedral crypt. "Clean-feed" input was faded on the operator's left; commentator's left; commentator's microphones were controlled on mixer's right.



John Flewitt joined the BBC in 1967 after obtaining a degree in electronics at Sheffield University. He worked initially in television studio maintenance before joining Studio Capital Projects Department. He is now a publicity engineer in Engineering Information Department with special responsibility for technical photography.

wide range of operating modes to be electronically selected in a subsequent mixing session. In the cathedral, each sound-field microphone's physical height was set by listening to the output of a unit in omnidirectional mode and fixing the height when the most satisfactory balance was heard. A height in the range 30-50 ft proved about right.

**Royal success**

It was a complex exercise and, with 1000 million people listening for the marriage vows, had to be reliable. How did it perform?

Well, very successfully - it could hardly have been otherwise; but, bearing in mind that much of the ceremony could not be properly rehearsed, the quiet sighs of relief from the engineers at the successful conclusion can be well understood.

The introduction of television and its accompanying lighting into a large, completely 'wired-for-sound' cathedral certainly presented numerous hum problems; for instance. But after the below-par cable screening was tracked down and some cable re-routing undertaken, the seven miles of microphone cable and the 10-mile long lighting network co-existed successfully, each in its own way making a vital contribution to Britain's and the world's biggest outside broadcast.

**Acknowledgement**

The author would like to thank the engineers of Radio O.Bs for their assistance, especially Harold Kutscherauer for his diagram of the microphone placings, and the BBC's Director of Engineering for permission to publish.

# Digital storage and analysis of speech

## 3—Spectral analysis

by Ian H. Witten, M.A., M.Sc., Ph.D., M.I.E.E., University of Calgary

Digital recordings of speech provide a jumping-off point for further processing which can alleviate the difficulty of synthesizing natural sounds by concatenating individually-spoken words. Perhaps the most significant contextual effect which must be taken into account when forming connected speech out of isolated words is pitch. The intonation of an utterance, which is a continually changing pitch, is holistic, in that the utterance contains more information than the sum of its components determined by the individual words alone. Happily, and quite coincidentally, communications engineers in their quest for reduced-bandwidth telephony have invented methods of coding speech that separate the pitch information from that carried by the articulation.

Most speech analysis views speech according to the source-filter model\* which aims to separate the effects of the sound source — the vocal cords — from those of the vocal tract filter. The frequency spectrum of the vocal tract filter is of great interest, and the technique of discrete Fourier transformation will be discussed. For many purposes it is better to extract the formant frequencies from the spectrum and use these alone (or in conjunction with their bandwidths) to characterize it. As far as the signal source in the source-filter model is concerned, its most interesting features are pitch and amplitude — the latter being easy to estimate. Hence we go on to look at pitch extraction. Related to this is the problem of deciding whether a segment of speech has voiced or unvoiced excitation, or both.

### The channel vocoder

A direct representation of the frequency spectrum of a signal can be obtained by a bank of bandpass filters. This is the basis of the channel vocoder, which was the first device that attempted to take advantage of the source-filter model for speech coding (the word "vocoder" is a contraction of voice coder). The energy in each filter band is estimated by rectification and smoothing, and the resulting approximation to the frequency spectrum is transmitted or stored. The source proper-

ties are represented by the type of excitation (voiced or unvoiced), and if voiced, the pitch. It is not necessary to include the overall amplitude of the speech explicitly, because this is conveyed by the energy levels from the separate bandpass filters.

Figure 11 shows the encoding part of a channel vocoder which has been used successfully for many years. We will discuss the block labelled "pre-emphasis" shortly. The shape of the spectrum is estimated by 19 bandpass filters, whose spacing and bandwidth decrease slightly with decreasing frequency to obtain the rather greater resolution that is needed in the lower frequency region, as shown in Table 3. The 3 dB points of adjacent filters are halfway between their centre frequencies, so that there is some overlap between

Fig. 11. Block diagram of the encoding side of a channel recoder, which determines and encodes the energy in each of nineteen channels.

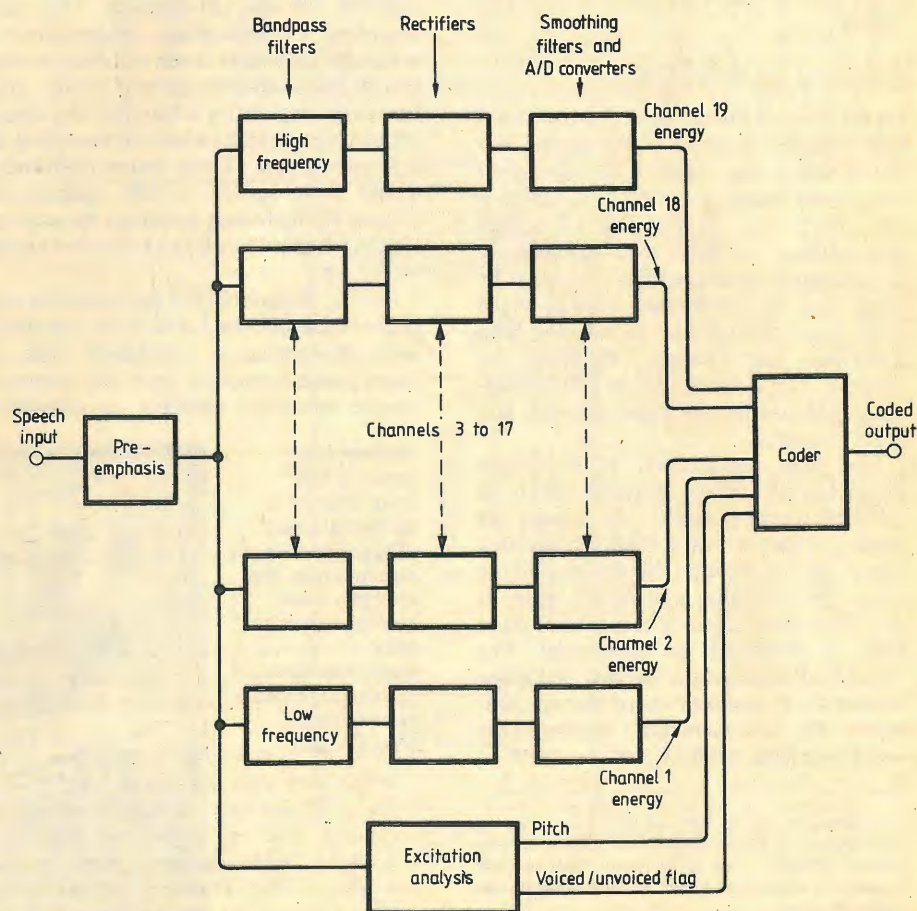


Table 3: Filter specifications for a vocoder analyser

channel number	centre frequency (Hz)	analysis bandwidth (Hz)
1	240	120
2	360	120
3	480	120
4	600	120
5	720	120
6	840	120
7	1000	150
8	1150	150
9	1300	150
10	1450	150
11	1600	150
12	1800	200
13	2000	200
14	2200	200
15	2400	200
16	2700	200
17	3000	300
18	3300	300
19	3750	500

bands. The filter characteristics do not need to have very sharp edges, because the energy in neighbouring bands is fairly highly correlated. Indeed, there is a disadvantage in making them too sharp, because the phase delays associated with sharp cutoff filters induce "smearing" of the spectrum in the time domain. This particular channel vocoder uses second-order Butterworth bandpass filters.

For regenerating speech stored in this way, an excitation of unit impulses at the specified pitch period (for voiced sounds) or white noise (for unvoiced sounds) is produced and passed through a bank of bandpass filters similar to the analysis ones. The excitation has a flat spectrum, for regular impulses have harmonics at multiples of the repetition frequency which are all of the same size, and so the spectrum of the output signal is completely determined by the filter bank. The gain of each filter is controlled by the stored magnitude of the spectrum at that frequency.

The frequency spectrum and voicing pitch of speech change at much slower rates than the time waveform. The changes are due to movements of the articulatory organs (tongue, lips, etc.) in the speaker, and so are limited in their speed by physical constraints. A typical rate of production of phonemes is 15 per second, but in fact the spectrum can change quite a lot within a single phoneme (especially a stop sound). Between 10 and 25 msec (100 Hz and 40 Hz) is generally thought to be a satisfactory interval for transmitting or storing the spectrum, to preserve a reasonably faithful representation of the speech. Of course, the entire spectrum, as well as the source characteristics, must be stored at this rate. One channel vocoder uses 48 bits to encode the information. Repeated every 20 msec, this gives a data rate of 2400 bits/s — very considerably less than any of the time-domain encoding techniques.

It needs some care to encode the output of 19 filters, the excitation type, and the pitch into 48 bits of information. Six bits are needed for pitch, logarithmically encoded, and one bit for excitation type. This leaves 41 bits to encode the output of the 19 filters, and a differential technique can be used which transmits just the difference between adjacent channels — for the spectrum does not change abruptly in the frequency domain. Three bits are enough for the absolute level in channel 1, and two bits for each channel-to-channel difference, giving a total of 39 bits for the whole spectrum. The remaining two bits per frame can be reserved for signalling or monitoring purposes.

A 2400 bit/s channel vocoder degrades the speech in a telephone channel quite perceptibly. It is sufficient for interactive communication, where if you do not understand something you can always ask for it to be repeated. It is probably not good enough for most voice response applications. However, the vocoder principle can be used with larger filter banks and much higher bit rates, and still reduce the data

rate substantially below that required by log. p.c.m.

### Pre-emphasis

It has often been noticed that there is an overall -6 dB/octave trend in speech radiated from the lips, as frequency increases. For vocoders, and indeed for other methods of spectral analysis of speech, it is usually desirable to equalize this by a +6dB/octave lift prior to processing, so that the channel outputs occupy a similar range of levels. On regeneration, the output speech is passed through an inverse filter which provides 6 dB/octave of attenuation.

For a digital system, such pre-emphasis can either be implemented as an analogue circuit which precedes the presampling filter and digitizer, or as a digital operation on the sampled and quantized signal. In the former case, the characteristic is usually flat up to a certain breakpoint, which occurs somewhere between 100 Hz and 1 kHz — the exact position does not seem to be critical — at which point the +6 dB/octave lift begins. Although de-emphasis on output ought to have an exactly inverse characteristic, it is sometimes modified or even eliminated altogether in an attempt approximately to counteract the  $\sin(\pi f/f_s)/(\pi f/f_s)$  distortion introduced by the desampling operation, which was discussed in an earlier section. Above half the sampling frequency, the characteristic of the pre-emphasis is irrelevant because any effect will be suppressed by the presampling filter.

The effect of a 6 dB/octave lift can also be achieved digitally, by differencing the input. The operation

$$y(n) = x(n) - ax(n-1)$$

is suitable, where the constant parameter  $a$  is usually chosen between 0.9 and 1. The latter value gives straightforward differencing, and this amounts to creating a d.p.c.m. signal as input to the spectral analysis. Figure 12 plots the frequency

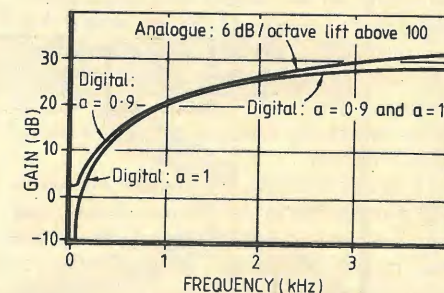


Fig. 12. Frequency response of digital pre-emphasis block shown in Fig. 11. Analogue and digital responses shown.

response of this operation, with a sample frequency of 8 kHz, for two values of the parameter, together with that of a 6 dB/octave lift above 100 Hz. The vertical positions of the plots have been adjusted to give the same gain, 20 dB, at 1 kHz. The difference at 3.4 kHz, the upper end of the telephone spectrum, is just over 2 dB. At frequencies below the breakpoint, in this case 100 Hz, the difference between analogue and digital pre-emphasis can be very

great. For  $a = 0.9$  the attenuation at zero frequency is 18 dB below that at 1 kHz, which happens to be close to that of the analogue filter for frequencies below the breakpoint. However, if the break point had been at 1kHz there would have been 20dB difference between the analogue and  $a=0.9$  plots at z.f. And of course, the  $a=1$  characteristic has infinite attenuation at z.f. In practice, however, the exact form of the pre-emphasis does not seem to be at all critical.

The above remarks apply to voiced speech. For unvoiced speech there appears to be no real need for pre-emphasis; indeed, it may do harm by reinforcing the already large high-frequency components. There is a case for altering the parameter  $a$  according to the excitation mode of the speech:  $a=1$  for voiced excitation and  $a=0$  for unvoiced gives pre-emphasis just when it is needed. This can be achieved by expressing the parameter in terms of the autocorrelation of the incoming signal, as

$$a = \frac{R(1)}{R(0)}$$

where  $R(1)$  is the correlation of the signal with itself delayed by one sample, and  $R(0)$  is the correlation without delay (that is, the signal variance). This is reasonable intuitively because high sample-to-sample correlation is to be expected in voiced speech, so that  $R(1)$  is very nearly as great as  $R(0)$  and the ratio becomes 1; whereas little or no sample-to-sample correlation will be present in unvoiced speech, making the ratio close to 0. Such a scheme is reminiscent of a.d.p.c.m. with adaptive prediction.

However, this sophisticated pre-emphasis method does not seem to be worthwhile in practice. Usually the breakpoint in an analogue pre-emphasis filter is chosen to be rather greater than 100Hz to limit the amplification of fricative energy. In fact, one channel vocoder has the breakpoint at 1kHz, limiting the gain to 12dB at 4kHz, two octaves above.

### Digital signal analysis

You may be wondering how the frequency response for the digital pre-emphasis filters, displayed in Fig. 12, can be calculated. Suppose a digitized sinusoid is applied as input to the filter.

$$y(n) = x(n) - ax(n-1)$$

A sine wave of frequency  $f$  has equation  $x(t) = \sin 2\pi ft$ , and when sampled at  $t=0, T, 2T, \dots$  (where  $T$  is the sampling interval, 125ms for an 8kHz sample rate), this becomes  $x(n) = \sin 2\pi f n T$ . It is much more convenient to consider a complex exponential input,  $e^{j2\pi f n T}$  — the response to a sinusoid can then be derived by taking imaginary parts, if necessary. The output for this input is

$$y(n) = e^{j2\pi f n T} - a e^{j2\pi f (n-1) T} \\ = (1 - a e^{j2\pi f T}) e^{j2\pi f n T}$$

a sinusoid at the same frequency as the input. The factor  $1 - a e^{-j2\pi f T}$  is complex, with both amplitude and phase components. Thus the output will be a phase-

\*See the Chatterbox article, cited earlier.



shifted and amplified version of the input. The amplitude response at frequency  $f$  is therefore

$$|1 - ae^{-j2\pi fT}| = [1 + a^2 - 2a \cos 2\pi fT]^{1/2},$$

or

$$10 \log_{10}(1 + a^2 - 2a \cos 2\pi fT) \text{ dB.}$$

Normalizing to 20dB at 1kHz, and assuming 8kHz sampling, yields

$$20 + 10 \log_{10}(1 + a^2 - 2a \cos \frac{\pi f}{4000}) - 10 \log_{10}(1 + a^2 - 2a - 2a \cos \frac{\pi}{4}).$$

With  $a=0.9$  and 1 this gives the graphs of Fig. 12.

Frequency responses for analogue filters are often plotted with a logarithmic frequency scale, as well as a logarithmic amplitude one, to bring out the asymptotes in dB/octave as straight lines. For digital filters, the response is usually drawn on a linear frequency axis extending to half the sampling frequency. The response is symmetric about this point.

Analyses like the above are usually expressed in terms of the  $z$ -transform. Denote the unit delay operation by  $z^{-1}$ . The choice of the inverse rather than  $z$  itself is of course an arbitrary matter, but the convention has stuck. Then the filter can be characterized by Fig. 13, which signi-

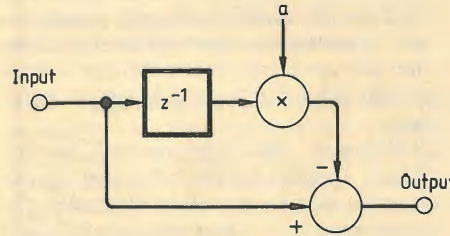


Fig. 13. Digital pre-emphasis filter. Block labelled  $Z^{-1}$  is delay operator.

fies that the output is the input minus a delayed and scaled version of itself. The transfer function of the filter is

$$H(z) = 1 - az^{-1},$$

and we have seen that the effect of the system on a (complex) exponential of frequency  $f$  is to multiply it by

$$1 - ae^{-j2\pi fT}.$$

To get the frequency response from the transfer function, replace  $z^{-1}$  by  $e^{-j2\pi fT}$ . Amplitude and phase responses can then be found by taking the modulus and angle of the complex frequency response.

If  $z^{-1}$  is treated as an operator, it is quite in order to summarize the action of the filter by

$$y(n) = x(n) - az^{-1}x(n) = (1 - az^{-1})x(n).$$

However, it is usual to derive from the sequence  $x(n)$  a transform  $X(z)$  upon which  $z^{-1}$  acts as a multiplier. If the transform of  $x(n)$  is defined as

$$X(z) = \sum_{n=-\infty}^{\infty} x(n)z^{-n},$$

then on multiplication by  $z^{-1}$  we get a new transform, say  $V(z)$ :

$$V(z) = z^{-1}X(z) = z^{-1} \sum_{n=-\infty}^{\infty} x(n)z^{-n} = \sum_{n=-\infty}^{\infty} x(n)z^{-n-1} = \sum_{n=-\infty}^{\infty} x(n-1)z^{-n}.$$

$V(z)$  can also be expressed as the transform of a new sequence, say  $v(n)$ , by

$$V(z) = \sum_{n=-\infty}^{\infty} v(n)z^{-n},$$

from which it becomes apparent that

$$v(n) = x(n-1).$$

Thus  $v(n)$  is a delayed version of  $x(n)$ , and we have accomplished what we set out to do, namely to show that the delay operator  $z^{-1}$  can be treated as an ordinary multiplier in the  $z$ -transform domain, where  $z$ -transforms are defined as the infinite sums given above.

In terms of  $z$ -transforms, the filter can be written

$$Y(z) = (1 - az^{-1})X(z),$$

where  $z^{-1}$  is now treated as a multiplier. The transfer function of the filter is

$$H(z) = \frac{Y(z)}{X(z)} = 1 - az^{-1},$$

the ratio of the output to the input transform.

It may seem that little has been gained by inventing this rather abstract notion of transform, simply to change an operator to a multiplier. After all, the equation of the filter is no simpler in the transform domain than it was in the time domain using  $z^{-1}$  as an operator. However, we will need to go on to examine more complex filters. Consider, for example, the transfer function

$$H(z) = \frac{1 + az^{-1} + bz^{-2}}{1 + cz^{-1} + dz^{-2}}.$$

If  $z^{-1}$  is treated as an operator, it is not immediately obvious how this transfer function can be realized by a time-domain recurrence relation. However, with  $z^{-1}$  as an ordinary multiplier in the transform domain, we can make purely mechanical manipulations with infinite sums to see what the transfer function means as a recurrence relation.

It is worth noting the similarity between the  $z$ -transform in the discrete domain and the Fourier and Laplace transforms in the continuous domains. In fact, the  $z$ -transform plays an analogous role in digital signal processing to the Laplace transform in continuous theory, for the delay operator  $z^{-1}$  performs a similar service to the differentiation operator  $s$ . Recall first the continuous Fourier transform,

$$G(f) = \int_{-\infty}^{\infty} g(t)e^{-j2\pi ft} dt,$$

where  $f$  is real, and the Laplace transform,

$$F(s) = \int_0^{\infty} f(t)e^{-st} dt,$$

where  $s$  is complex. The main difference between these two transforms is that the

range of integration begins at  $-\infty$  for the Fourier transform and at 0 for the Laplace. Advocates of the Fourier transform, which typically include people involved with telecommunications, enjoy the freedom from initial conditions which is bestowed by an origin way back in the mists of time. Advocates of Laplace, including most analogue filter theorists, invariably consider systems where all is quiet before  $t=0$  - altering the origin of measurement of time to achieve this if necessary - and welcome the opportunity to include initial conditions explicitly without having to worry about what happens in the mists of time. Although there is a two-sided Laplace transform where the integration begins at  $-\infty$ , it is not generally used because it causes some convergence complications. Ignoring this difference between the transforms (by considering signals which are zero when  $t < 0$ ), the Fourier spectrum can be found from the Laplace transform by writing  $s = j2\pi f$ ; that is, by considering values of  $s$  which lie on the imaginary axis.

The  $z$ -transform is

$$H(z) = \sum_{n=0}^{\infty} h(n)z^{-n}, \text{ or}$$

$$H(z) = \sum_{n=-\infty}^{\infty} h(n)z^{-n},$$

depending on whether a one-sided or two-sided transform is used. The advantages and disadvantages of one- and two-sided transforms are the same as in the analogue case.  $Z$  plays the role of  $e^{sT}$ , and so it is not surprising that the response to a (sampled) sinusoid input can be found by setting

$$z = e^{j2\pi fT}$$

in  $H(z)$ , as we proved explicitly above for the pre-emphasis filter.

The above relation between  $z$  and  $f$  means that real-valued frequencies correspond to points where  $|z|=1$ , that is, the unit circle in the complex  $z$ -plane. As you travel anticlockwise around this unit circle, starting from the point  $z=1$ , the corresponding frequency increases from 0, to  $1/2T$  half-way round ( $z=-1$ ), to  $1/T$  when you get back to the beginning ( $z=1$ ) again. Frequencies greater than the sampling frequency are aliased back into the sampling band, corresponding to further circuits of  $|z|=1$  with frequency going from  $1/T$  to  $2/T$ ,  $2/T$  to  $3/T$ , and so on. In fact, this is the circle of Fig. 3 which was used earlier to explain how sampling affects the frequency spectrum!

To be continued

### Corrections - Frequency synthesizer for c.b.

Figure 1 of the above article in the September issue contained the following errors for which we apologize: the anode of the variable-capacitance diode connected to the frequency up/down rail should have been connected to ground, the unmarked capacitor of the v.c.o. circuit is 1nF and the 1μF capacitor at the bottom of the diagram should be 10μF.

# LEADER TEST INSTRUMENTS


## - more performance and reliability than you ever thought possible




### A Leader instrument for every need.

The full range of Leader Test Equipment, the first choice of engineers around the world, is now available in the U.K. Leader products, with a long history of high reliability, backed by a 1-year warranty, are engineered and built to the most rigid standards, and incorporate the latest technology. A complete technical and service facility is provided in the U.K. by Sinclair Electronics Ltd.

#### RADIO/CB/TV TEST



CRT Testers · Pattern Generators · Signal Generators · Antenna Impedance Meters · RF Power Meters · C.B. Signal Generators · Stereo Signal Generators · Dip Meters · SWR/Wattmeters  
**LSG16 SIGNAL GENERATOR**  
 A compact R.F. generator ideally suited to checking alignment of AM/FM and T.V. receivers.  
 \* Frequency Range 100 KHz - 100 MHz  
 \* Frequency Accuracy ± 1.5%  
 \* Crystal Oscillator 1-15 MHz  
 \* Modulation Internal 1kHz for A.M.  
 \* Output Voltage 0.1Vrms or higher to 100 MHz



**LB0508A OSCILLOSCOPE**  
 With 20MHz bandwidth and 10 mV input sensitivity on a 5" screen this universal oscilloscope is suitable for a wide range of applications

- \* 5" Dual trace
- \* DC-20 MHz bandwidth (vert amp)
- \* 10 mV Sensitivity
- \* Sweep mode: chop - ALT, CH1, CH2, X-Y
- \* Synchronisation: Auto, Norm, TV, Int., Ext., +, -
- \* Timebase Sweep Speeds: 0.5 μs/cm - 200 ms/cm
- \* X5 Magnification (max speed 100ns/cm)

LBO 310A	4 MHz	20 mV	Single Trace	3"
LBO 301	8 MHz	10 mV	Single Trace	3"
LBO 308S	20 MHz	2 mV	Dual Trace	3.5" Mains/Battery
LBO 510A	4 MHz	20 mV	Single Trace	5"
LBO 512A	10 MHz	10 mV	Single Trace	5"
LBO 513	10 MHz	5 mV/1 mV	Single Trace	5"
LBO 514	10 MHz	5 mV/1 mV	Dual Trace	5"
LBO 552A	10 MHz	20 mV	Dual Trace	5" Stereo Scope
LBO 506A	15 MHz	10 mV	Dual Trace	5"
LBO 507A	20 MHz	10 mV	Single Trace	5"
NEW LBO 515B	30 MHz	5 mV	Dual Trace	4.5" Sweep Delay
LBO 520A	35 MHz	5 mV	Dual Trace	5.5"
NEW LBO 517	50 MHz	5 mV/1 mV	Quad Trace	6" Sweep Delay

#### GENERAL TEST

Function Generators · Transistor Checkers · LCR Bridges · Power supplies · Millivoltmeters · Curve Tracers · Home Appliance Testers

#### LHM 80A H.V. METERED PROBE

\* Input Impedance 20K Ω per volt  
 \* Range 40K Volts  
 \* Accuracy ± 3% Full Scale

#### LDP 076 LOGIC PROBE

Fast servicing and analysis of digital circuits  
 \* Input Impedance > 10M Ω  
 \* Frequency Range DC to 50MHz  
 \* Minimum Pulse Width 10ns

NEW

#### AUDIO TEST



NEW

Audio Generators · Frequency Response Recorders  
 Audio Systems Analyzers · Wow & Flutter Meters  
 Speaker Analyzers · Audio Testers · Distortion Meters · Attenuators

#### LFR5600A FREQUENCY RESPONSE RECORDER

Designed to graphically record wow and flutter, drift, voltage, temperature and frequency response of audio equipment.  
 \* Frequency Range 20 Hz - 30 KHz  
 \* Variable chart speed  
 \* Voltage range 0.1V, 1V, 10V  
 \* Sweep Oscillator \*Pilot Signal \*Cartridge pen  
 \* Metered, Swept frequency input/output voltage

WW - 025 FOR FURTHER DETAILS

For full technical details together with price list please contact:

# LEADER


SINCLAIR ELECTRONICS LTD

London Road, St. Ives, Huntingdon, Cambs. PE17 4HJ.  
 Telephone: St. Ives (0480) 64646. Telex: 32250

Sinclair Electronics Ltd. reserve the right to alter prices and specifications on Leader equipment without prior notice.

## PORTABLE MAINS DISTRIBUTION NOW WITH EARTH LEAKAGE

# OLSON

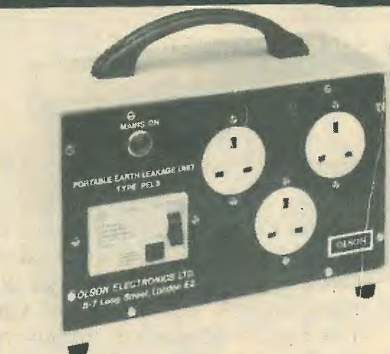

◀ Portable unit with earth leakage

Type PEL 3


£59 + £2 pp + VAT



▲ Wall unit with earth leakage

Type WEL2 £48


+ pp £2 + VAT



▲ 3 1/2" x 19" Rack Mounting

Type 13A/4SW/R

£23.65 + pp £1.25 + VAT



▲ Bench unit with earth leakage

Type BEL5SW

£55 + pp £2 + VAT



◀ 7" x 19" rack mounting with earth leakage

Type REL 7

£69 + pp £2 + VAT

Internal Power for racks 8 types from 3-10 sockets. All fitted with illuminated switch

Type T13A/10

50mm x 890mm

£34.25

+ £2 pp & VAT



▲ 4 feet LG. 30 amp total load Instant Trunking System for Wall or Bench Mounting

TR6 — 6 sockets switched £29.70 or TR9 — 9 sockets switched £35.20 + PP £2.25 + VAT


10 sockets switched in sloping box

Type 13A/10SW £36.30

+ PP £2.25 + VAT



Type 13A/6SW

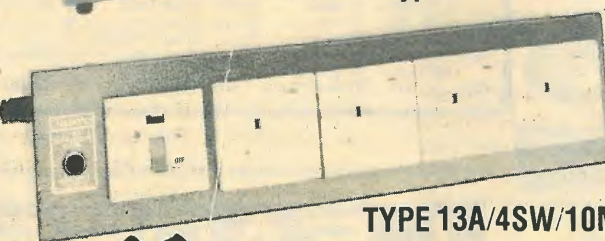

TYPE 13A/4SW/10M

10mA earth leakage UNIT

£68.00

+ £2 pp & VAT

Type		Price	PP
13A/4	not switched	£17.00	£1.25
13A/6	not switched	£20.60	£1.25
13A/4SW	switched	£20.35	£1.25
13A/6SW	switched	£23.65	£1.25

ALL PRICES PLUS VAT

These four types in sloping or flat boxes

● All units are in metal boxes complete with 6ft cable and 13 amp fused plug, ready for use. Only MK sockets and plugs are used. Trade counter open 9-5 Mon.-Fri.

**OLSON** Electronics Ltd.

FACTORY NO. 8, 5-7 LONG STREET  
LONDON E2 8HJ Tel: 01-739 2343

WW-071 FOR FURTHER DETAILS

# A.m. receivers without interference

A method of interference cancellation for double sideband signals

by Lewis Illingworth, B. Eng.

Two systems which work with d.s.b. amplitude modulated carriers are described. As the signals are those propagated in long, medium and short wave bands throughout the world, there is a universal application. The systems make use of the fact that a.m. signals have symmetrical sidebands spreading out each side of the carrier frequency so that a modulated carrier has a constant phase, that of the carrier. Interference is not symmetrical even when it spreads through the same frequencies and this asymmetry can be used against it.

Double sideband a.m. transmission has especially desirable characteristics. In the *IRE Proceedings* for December 1956, John P. Costas wrote an article "Synchronous communications — the optimum a.m. system" which explains that double sideband, suppressed carrier a.m. signals, similar to broadcast signals but with the carrier removed, are easier to generate than single sideband and permit straightforward synchronous reception with superior performance in the presence of jamming and other interference. What was not mentioned was the additional possibility of cancelling out some of the received interference when synchronous reception is employed. One article which did cover this was an excellent paper in *Wireless World* by P. L. Taylor (July 1977) showing how one overlapping signal can be completely separated from another. Another fascinating paper on co-channel interference was given by J. S. Lothian at the *International Broadcasting Convention*, September 1974.

Our approach to the interference problem does not look for particular types of interfering signal and home in on them, as in P. L. Taylor's system, but to apply a general correction to a received band and accept whatever improvement one piece of circuitry will give. The systems described here completely eliminate interfering signals that are restricted to either side of the carrier. For the more difficult case of a fully modulated signal with carrier, at a slightly different carrier frequency from the wanted signal, the improvement in signal-to-noise ratio drops to about 10dB. As interference becomes progressively complex and finally degenerates to noise, the improvement drops to zero. This

performance could be improved but at the expense of some intermodulation between signal and interference.

While such performance is less than ideal, it must be remembered that the figures show improvement over the generally accepted theoretical limit for reception and represent considerable improvement over the performance of an equivalent s.s.b. receiver. This is achieved by conventional circuits and although the quantity of circuitry is not trivial, it is straightforward and works automatically.

## Synchronous reception

An unexpected and welcome benefit from the addition of these systems is apparent when used with a synchronous receiver. Such sets, for example the General Electric AN/FRR-48 (XW-1) while operating well on fixed frequencies within the range of carrier phase lock are not at all nice to use when searching for signals. Off frequency unsuppressed carriers are demodulated as ear splitting whistles. For experiments on signals from a receiver, rather than instruments, a synchronous adapter was tied into the 455kHz i.f. of a conventional receiver, leading to adequate and painful listening experience. The new circuits however see such off-tune carriers as interference and eliminate them accordingly. A synchronous receiver now becomes quite nice to use with off-tune stations sounding like single sideband "wasp in the matchbox" accompanied by low background whistle with the mess disappearing as the carrier is tuned within frequency limits.

## Development

My work on interference began some four years ago with a system that measured interference amplitude at carrier zero crossings. An initial guess at interference phase was taken to be that of the incoming signal, containing both signal and interference components, and the interference amplitude was estimated using that assumption. Signal amplitude was then deduced and subtracted from the incoming signal-interference composite to provide a better guess at incoming interference phase. Such a recursive system has to operate within tight, almost impossible envelope delay restrictions. Practical tests suggested however that such a system could be developed for general use and so a patent application (Canadian)

was made. Further development showed fair operation with simpler forms of interference and the system would even reduce noise levels at very low signal-to-noise ratios. However it was abominably unstable and the nonlinear recursive operation nigh on impossible to analyze. Response to it in official circles was negative — (See my letter to *Wireless World*, 15 September, 1977).

The simple system described here is an outcome of a search for a nonrecursive solution. While it is intended as a basis for forays into the realm of reducing levels of complex interference and even noise it stands in its own right as an extremely useful tool in cleaning up radio reception.

## Theory

A double sideband modulated carrier with carrier frequency  $f_c$  and modulation frequency  $f_m$  can be written down as:

$$m \cos 2\pi(f_c - f_m) + c \cos 2\pi f_c + m \cos 2\pi(f_c + f_m)$$

where  $m$  and  $c$  are amplitudes. This is for a simple sinusoidal modulation and ignores modulation phase, but suffices for this basic analysis.

Demodulating the signal by multiplying by the carrier frequency  $\cos 2\pi f_c$  gives us:

$$m \cos 2\pi f_c \cos 2\pi(f_c - f_m) + c \cos^2 2\pi f_c + m \cos 2\pi f_c \cos 2\pi(f_c + f_m)$$

$$= \frac{m}{2} [\cos 2\pi f_m + \cos 2\pi(2f_c - f_m)] +$$

$$\frac{c}{2} (1 + \cos 4\pi f_c) +$$

$$\frac{m}{2} [\cos 2\pi f_m + \cos 2\pi(f_c + f_m)]$$

$$= m \cos 2\pi f_m + \frac{m}{2} [\cos 2\pi(2f_c - f_m) +$$

$$\cos 2\pi(2f_c + f_m)]$$

and when filtered leaves a lower sideband at modulation frequencies:  $(c/2 + m \cos 2\pi f_m)$ . The carrier product  $c/2$  is constant and removed by a.c. coupling to leave the modulation  $m \cos 2\pi f_m$ .

Demodulating the signal by multiplying with the carrier frequency shifted through  $90^\circ$ ,  $\sin 2\pi f_c$ , gives us:

$$m \sin 2\pi f_c \cos 2\pi(f_c - f_m) + c \sin 2\pi f_c \cos 2\pi f_c + m \sin 2\pi f_c \cos 2\pi(f_c + f_m)$$

$$= \frac{m}{2} [\sin 2\pi f_m + \sin 2\pi(2f_c - f_m)] +$$

$$\frac{c}{2} \sin 4\pi f_c + \frac{m}{2} [-\sin 2\pi f_m + \sin 2\pi(2f_c + f_m)]$$

When this is filtered the  $\sin 2\pi f_m$  terms cancel to leave absolutely nothing.

The addition of interference leads to low frequency products when demodulated by both  $\sin$  and  $\cos 2\pi f_c$ . Let us add two interfering tones;  $U \cos 2\pi(f_c + f_u)$  above the carrier and  $L \cos 2\pi(f_c - f_l)$  below the carrier. Demodulating with  $\cos 2\pi f_c$  produces:

$$U \cos 2\pi f_c \cos 2\pi(f_c + f_u) + L \cos 2\pi f_c \cos 2\pi(f_c - f_l)$$

which has low frequency products:

$$\frac{U}{2} \cos 2\pi f_u + \frac{L}{2} \cos 2\pi f_l$$

Demodulating with  $\sin 2\pi f_c$  produces:

$$U \sin 2\pi f_c \cos 2\pi(f_c + f_u) + L \sin 2\pi f_c \cos 2\pi(f_c - f_l)$$

which has low frequency products:

$$\frac{U}{2} \sin 2\pi f_u - \frac{L}{2} \cos 2\pi f_l$$

It is convenient to shift the phase of these by  $90^\circ$  to give the signals:

$$\frac{U}{2} \cos 2\pi f_u - \frac{L}{2} \cos 2\pi f_l$$

To summarize this part, demodulation of the modulated carrier and interfering signals by the carrier, in its natural phase, produce the sum of all modulating and interfering signals; demodulation by a carrier in quadrature phase produces the difference between the interfering signals above and below the carrier, each shifted in phase by  $90^\circ$ .

Take the case of a single interfering tone, say  $U \cos 2\pi(f_c + f_u)$ , demodulated by a quadrature carrier to  $U/2 \sin 2\pi f_u$  and shifted  $90^\circ$  to  $U/2 \cos 2\pi f_u$ . This can be easily doubled and subtracted from the in phase demodulated output to leave only signal components. Unfortunately this can only be done if you know that the interference is sitting above the carrier. If it were below, then the subtraction of  $-L \cos 2\pi f_l$  will double the interference level in the output!

The key to the new system is to determine the polarity of the interference in the signal demodulated by the 'phase' carrier. To do this audio from the 'phase' demodulator is again modulated using the frequency of the 'quadrature' demodulated audio, shifted through  $90^\circ$ .

For audio derived from a signal with interference in the upper sideband:  $m \cos 2\pi f_m + U \cos 2\pi f_u$ , modulation by  $\cos 2\pi f_c$  produces:

$$mU/2 \cos 2\pi(f_m + f_u) - \cos 2\pi(f_m - f_u) + U(1 + \cos 4\pi f_u)$$

This signal is a mess, and most of it is generally unusable. However by filtering at frequencies below the audio range the d.c. value  $U$  is left in the clear, the lower intermodulation product  $mU/2 \cos 2\pi(f_m - f_u)$  may pass the filter but being smaller does affect the polarity of the filter output.

This d.c. value  $U$  can be used in two ways:

1. By providing the polarity of the interference it is simple to devise a circuit to either add or subtract the quadrature demodulated signal-with-interference composite.
2. In real life interference, many frequencies are present and there is no guarantee that the amplitude of the quadrature demodulated interference reflects the required 'phase' demodulated interference amplitude. The envelope of the interference at maximum, when interference is in quadrature with the carrier, may well be a minimum when it is in phase. Here the d.c. value filtered from the second modulation can provide a more accurate amplitude reference. It is re-modulated by the quadrature derived interference frequency to form an interference estimate and is then subtracted from the phase demodulated signal-interference composite.

While it is easy to see how the system works in rejecting a single interfering tone, the many frequencies present in real interference lead to complex analyses that are out of place here. Difficulties arise in estimating the phase of multitone interference, for example what is the instantaneous phase of a mixture of frequencies ranging between 300 and 3,000Hz? This difficulty is overcome by artificially raising signal and interference frequencies before processing so that they appear to be sinusoidal and the phase demodulated signal-with-interference component can be readily modulated by a signal having the instantaneous frequency and phase of the quadrature interference component. Not only does this make modulation possible, it has the added advantage of removing many modulation and intermodulation products to a high frequency where they

can be eliminated by a low pass filter. The phase of even a complex difference signal remains a good estimate for the phase of the interference appearing in the 'phase' demodulation and permits excellent operation with complex signals. Following interference cancellation, the correct frequency range has, of course, to be restored.

Systems employing both approaches are described. The performance of each can be modified by changing the bandwidth of the low pass filter in the interference amplitude/polarity circuit. As the frequency response here is increased, the system follows increasingly rapid changes in interference amplitude and frequency, accompanied by increasing intermodulation between signal and interference. The limit occurs when the low pass filter bandwidth equals that of the signal modulation. At this point interfering white noise is attenuated by some 6dB, but there is an associated loss in signal level of about 3dB due to the rapidly changing interference phase continually passing through the carrier and collecting bits of signal as it goes.

**Circuit description**

The amount of circuitry involved is quite extensive, so rather than getting involved in endless details, this description is limited to the functions of the various parts and only a couple of circuits are shown for clarification. There are two parts to the system: a synchronous receiver adapter that puts received radio signals into a suitable form for processing, and the interference cancelling system itself.

**Synchronous receiver adapter**

This system, shown in Figure 1, operates from a 455kHz signal taken from a conventional receiver i.f. amplifier. It is modulated by 555kHz for a 100kHz second i.f. frequency chosen to be high enough so that signals are well clear of the audio range and yet not too high for c-m.o.s switches to operate effectively as modulators and inexpensive operational amplifiers such as the LM218 operate without significant delay. The carrier is extracted by a 200Hz bandwidth bandpass filter, and frequency lock achieved by a frequency discriminator which generates a control voltage for the 555kHz heterodyne oscillator.

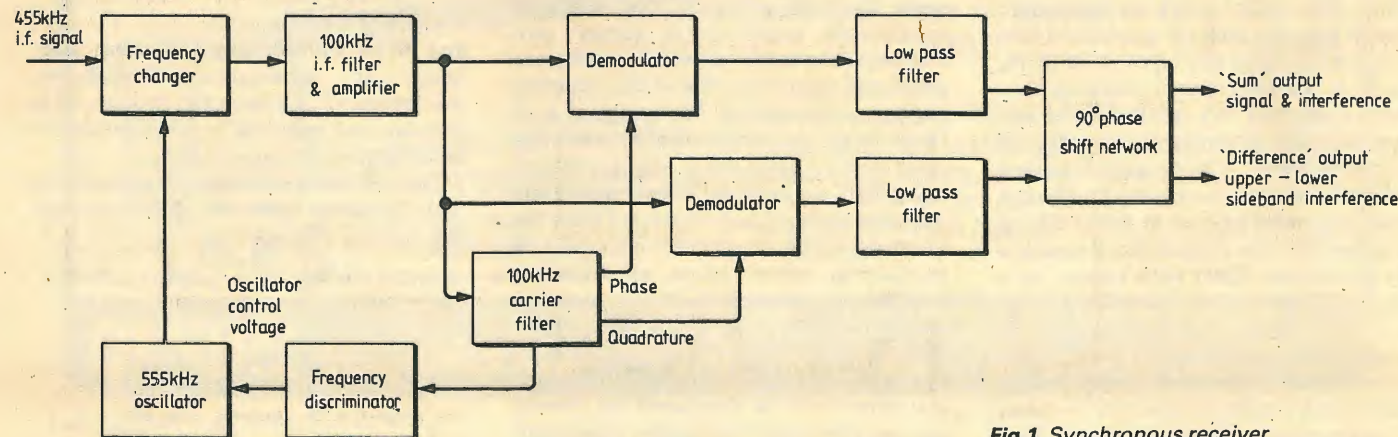


Fig. 1. Synchronous receiver

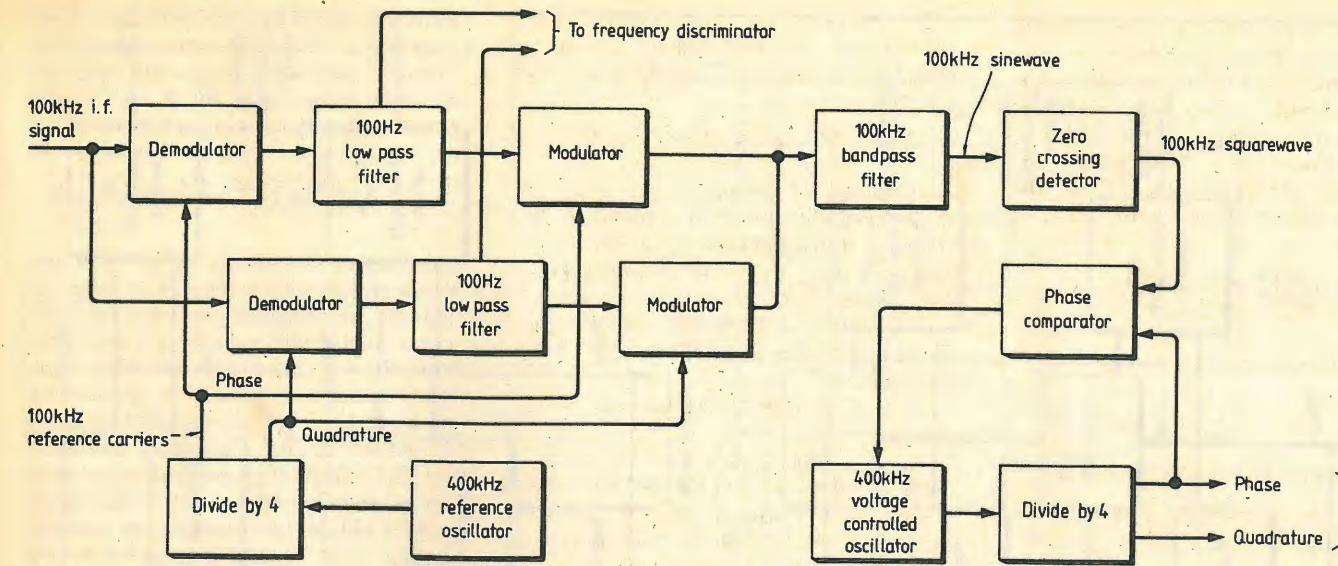


Fig. 2. Carrier filter for synchronous receiver

At first sight this system must appear cumbersome in an age of phase locked loops. The reason for it is quite simple: phase locked loops do not operate well under high interference conditions; the loop frequency response must be high enough to permit a lock to be regained after a disturbance, a necessary response that allows interference to get into the loop and so leads to phase jumps in the oscillator output. Narrowing down the response to prevent this happening also prevents phase locking. In the early synchronous receivers phase jitter would not cause much of a problem because a  $10^\circ$  phase error would only reduce the detected amplitude to  $\cos 10^\circ$ , 0.985, a drop of only 1.5%. With these interference cancelling systems, however, the quadrature value of the signal under the same conditions,  $\sin 10^\circ$ , 0.174 is considerable, 17.4%, and is seen by the circuitry as interference. A stable narrow band filter minimizes these phase perturbations in the detected carrier.

Two carrier phases are required, one in phase with the incoming signal and the other in quadrature. Each is used to demodulate the 100kHz i.f. signal to produce audio. The 'in phase' demodulation contains the sum of modulation and interfering signals, the 'quadrature' demodulation has the difference between interfering frequencies lying above and below the carrier. A final step adjusts the relative phases of these two outputs by  $90^\circ$  so that signal and interfering components are either in phase or  $180^\circ$  out of phase. It is convenient to refer to the phase corrected phase and quadrature demodulated outputs as 'sum'

and 'difference' signals because they are similar to equivalent signals derived from other radio and non-radio sources.

Figure 6 shows a typical circuit of a  $90^\circ$  phase shift network. Two RC networks both attenuate and phase shift the 'sum' and 'difference' audio signals in such a way that attenuation is uniform over the frequency range but there is a constant  $90^\circ$  phase difference produced in signals traversing them.

Figure 2 shows the carrier filter in detail. This has phase and quadrature demodulators and modulators together with low pass active filters to produce extremely stable amplitude and phase characteristics. It is the same type of filter that is used with remarkable success in navigation equipment and is not difficult to make.

The 100kHz i.f. signal is demodulated using 100kHz phase and quadrature reference carriers to produce audio low frequency outputs. Figure 7 shows a typical divider to generate these carriers from a 400kHz stable source. A matched pair of 100Hz cut off low pass active filters eliminate modulation, interference and other higher frequencies. These signals are re-modulated, again in phase and quadrature, back to 100kHz and added together. A simple 100kHz conventional filter removes higher modulation products to leave a clean reconstructed carrier. The result is an overall 200Hz bandwidth with stability equal to that of the reference oscillator. One point to watch is the complete cancellation of carrier leaks in the modulators,

these will tend to produce jitter in the carrier output.

A 400kHz voltage controlled oscillator drives a divide by 4 circuit to generate 100kHz phase and quadrature carrier outputs. A conventional phase locked loop ties these carriers to the squared up 100kHz filter output. Such a phase lock loop in this position causes no problem because interference has been eliminated from the system.

Figure 3 shows the frequency discriminator used to derive the frequency control voltage for the 555kHz heterodyne oscillator. This is driven by low frequency signals from within the carrier filter. The 'quadrature' demodulated low pass filter output is differentiated to generate a signal that increases with amplitude as the frequency difference increases between the 100kHz received carrier and 100kHz reference. It is in phase with the 'phase' signal when the carrier frequency is higher than the reference and is  $180^\circ$  out of phase when the carrier frequency is lower. The differentiated quadrature signal is added to the phase signal and results in a low frequency a.c. voltage whose amplitude increases when the carrier is above the reference and decreases when it is below. A complimentary a.c. signal is produced by inverting the differentiated 'quadrature' low pass output before adding to the phase signal. Here the amplitude decreases when the carrier is above the reference and increases when below. Both signals are rectified and applied to a differential amplifier to generate a d.c. oscillator control voltage.

The frequency lock is to within a couple of hertz under most operating conditions,

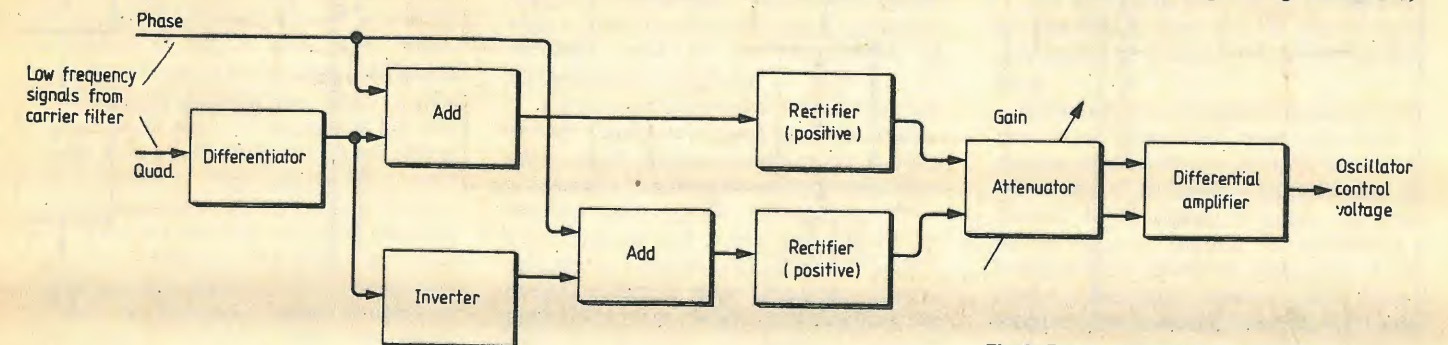


Fig. 3. Frequency discriminator for synchronous receiver

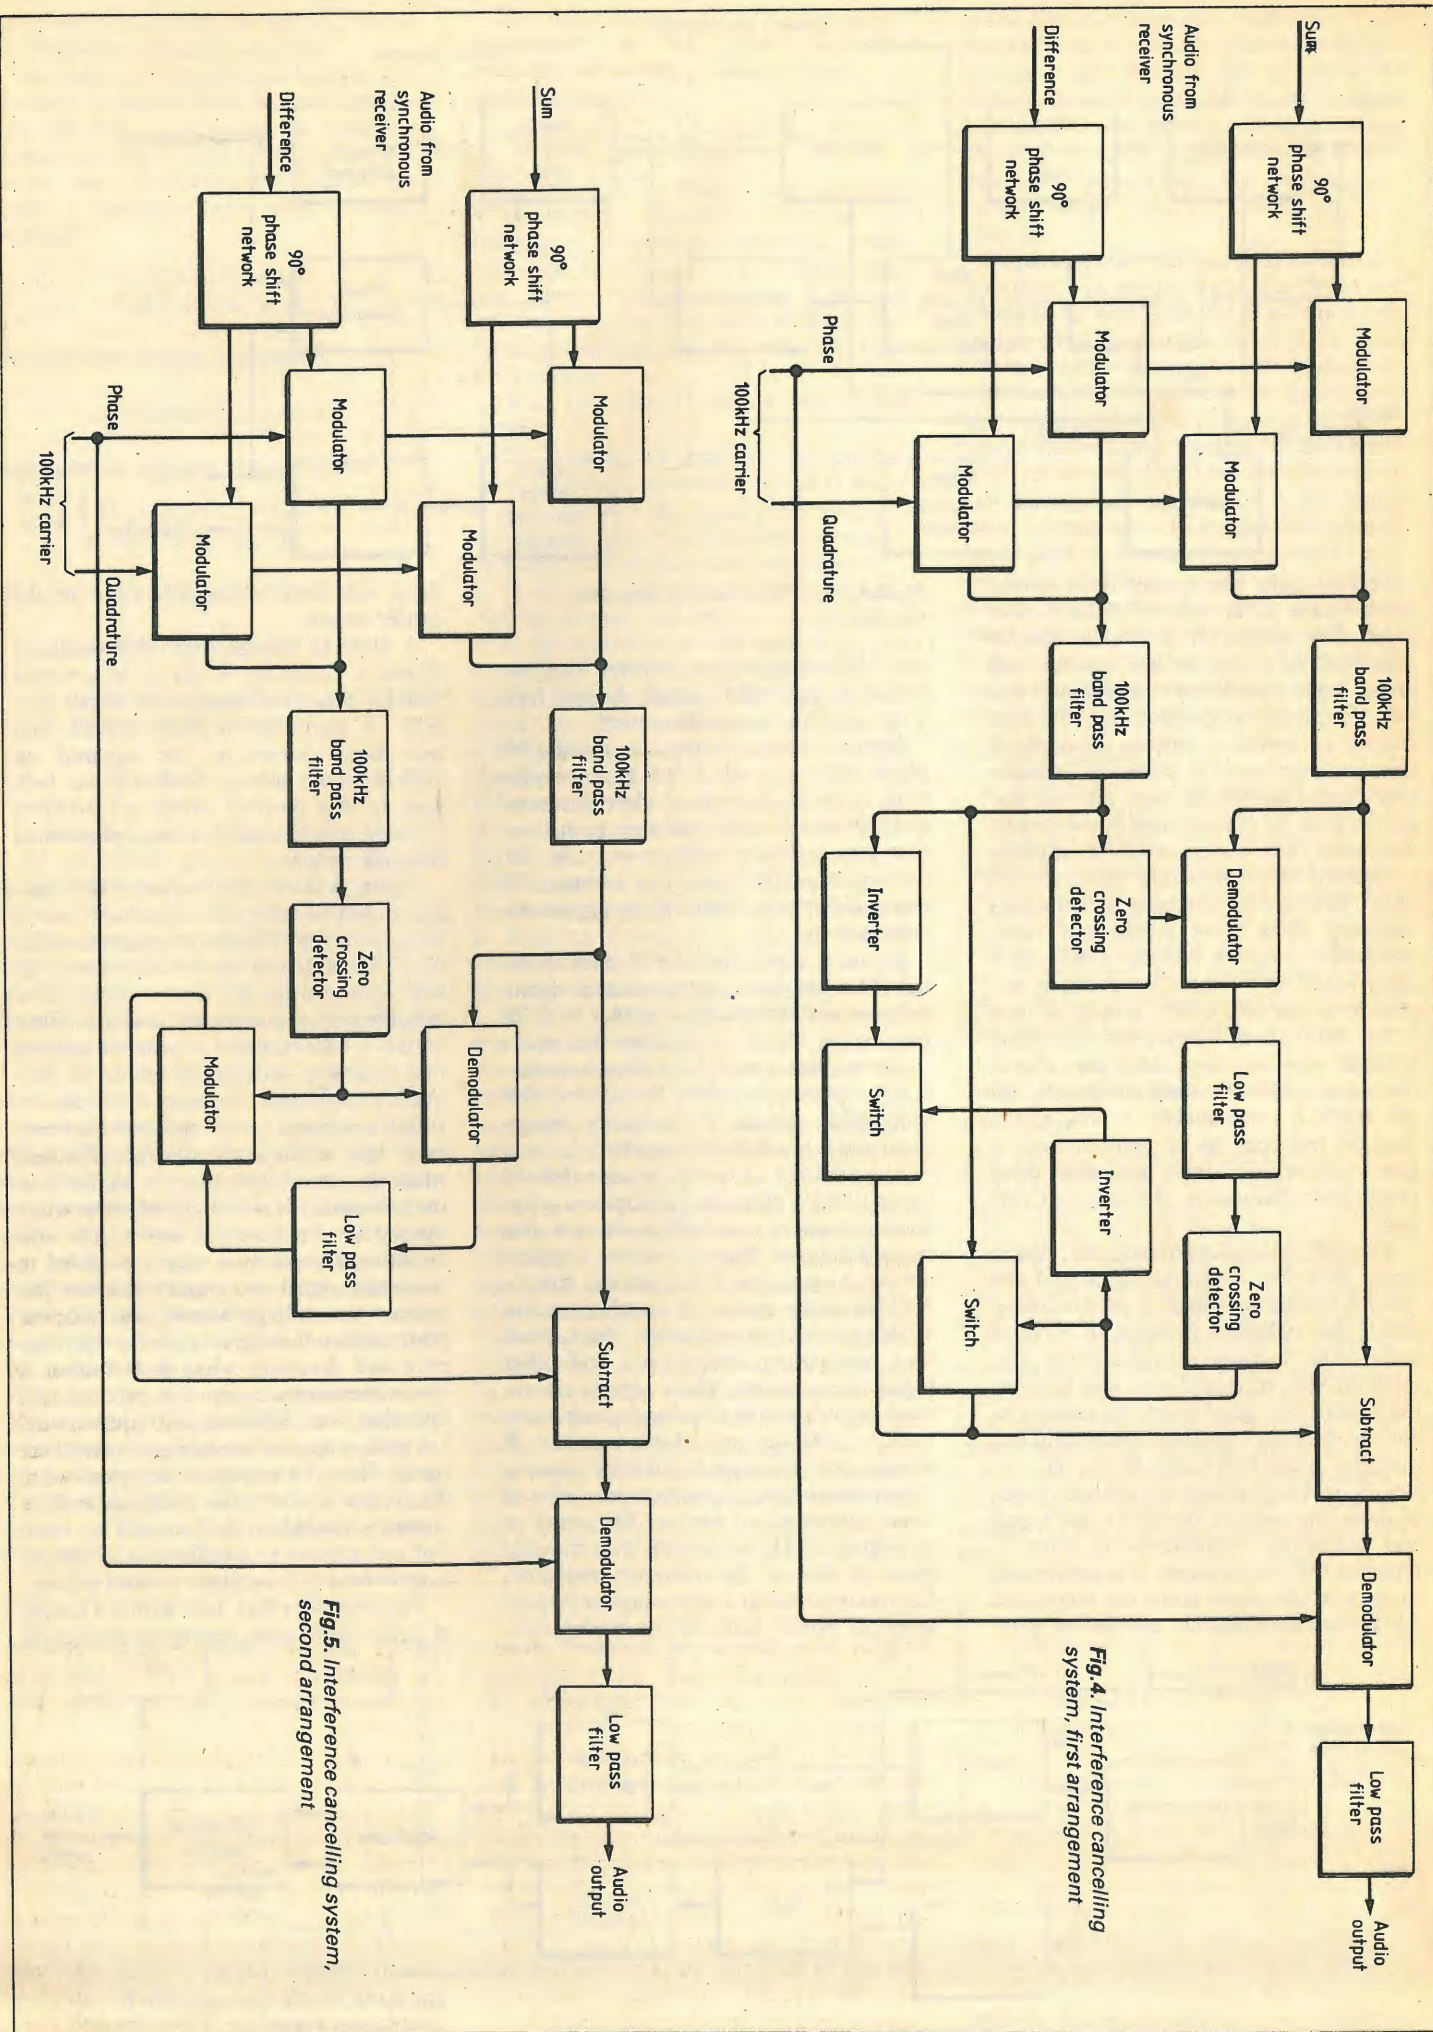


Fig. 5. Interference cancelling system, second arrangement

Fig. 4. Interference cancelling system, first arrangement

and by virtue of control by the reference oscillator is not subject to drift. It is important that the carrier frequency be maintained close to the reference in order to minimize off tune phase errors introduced by the carrier filters.

### Interference cancelling system

The first step in interference cancellation is to raise the frequency up out of the audio range so that everything appears sinusoidal. In the first arrangement, Figure 4, the 'sum' and 'difference' audio outputs from the synchronous receiver are applied to 90° phase shift networks, and modulated by phase and quadrature 100kHz carriers to form upper sidebands of 100kHz. This is a conventional phase-shift method single sideband generation. Each signal is then filtered to remove higher order components. The 'difference' signal is squared up by a zero crossing detector and the output used as a carrier to demodulate the 'sum'. A low pass filter passes only the d.c. component of the demodulation. From this the interference polarity is extracted by a zero crossing detector, converted into a logic level and used to control switches to select either the direct or the inverted 'difference' signal. This puts the interference into the correct polarity where it is subtracted from the 'sum' to produce an improved signal-to-noise ratio. The signal is still at 100kHz, so a final step is demodulation using the 'phase' 100kHz carrier to generate an audio output.

The second system, shown in Figure 5, starts off in a similar manner. Signals are shifted to 100kHz, the 'difference' signal is squared up and used to demodulate the 'sum', and the output low pass filtered. In this system the low pass filter output is taken to represent both the amplitude and polarity of the interference. It is remodulated by the same squared up 'difference' signal to generate reconstituted interference for subtraction from the 'sum' signal-with-interference composite to be followed by demodulation down to audio.

### Comments

Many system improvements suggest themselves and the most straightforward are currently being developed and assessed. There is unfortunately a practical limit beyond which processing errors in these

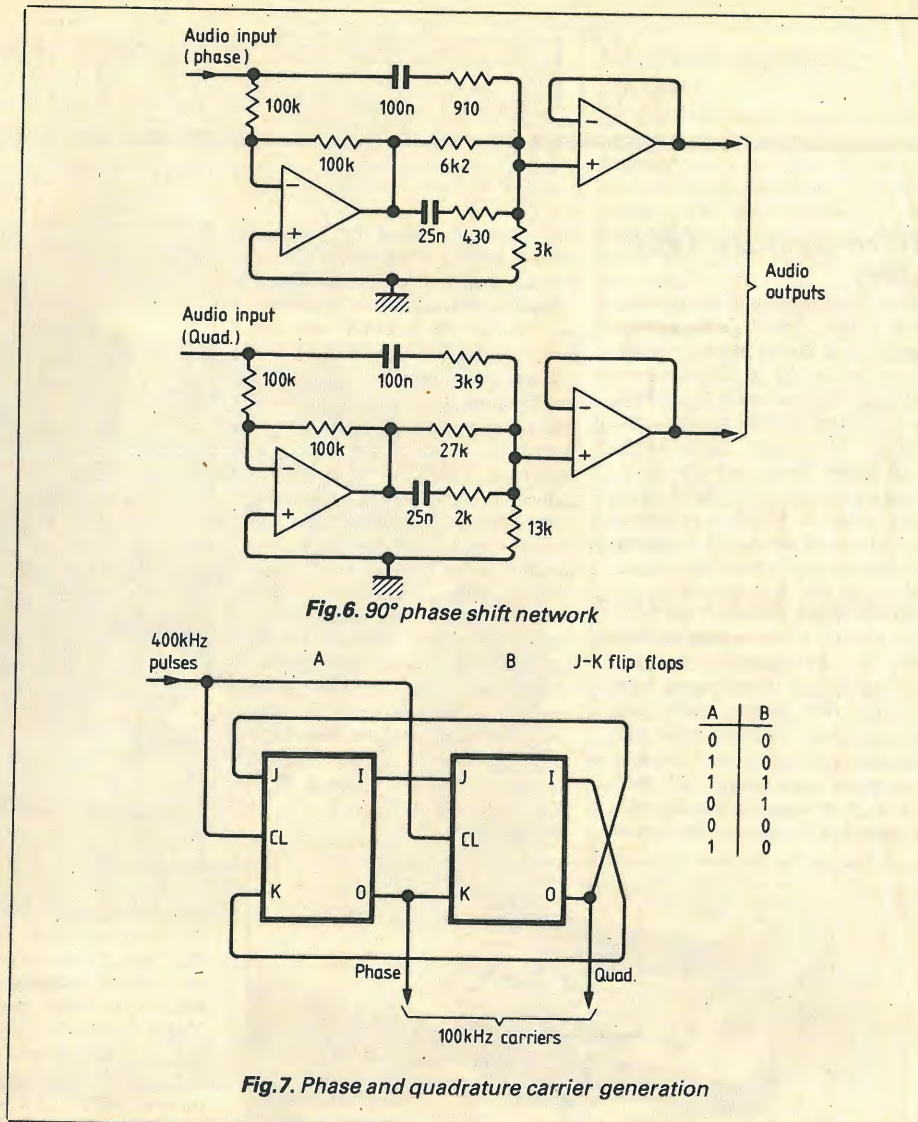


Fig. 6. 90° phase shift network

Fig. 7. Phase and quadrature carrier generation

analogue systems outweigh advantages gained by increased complexity. We can look forward though to steadily improved signal-to-noise ratios as time and innovation permit.

This article does not pretend to describe an optimum or ultimate method for interference cancellation. The intent is to show that the performance we now accept from our radios is not as good as it could be and that significant improvements can be made by straightforward circuitry. The approach has value both in the improvement of radio reception and also as a basis for further experimentation, particularly

into the nature of interference and band limited noise.

The circuits are particularly adaptable to attenuation of interference when something is known about the nature of the interference, for example, military jamming or c.w. interference on frequency shift radio telegraphy.

There is an equivalent system under development for f.m. receivers. This takes the constant f.m. signal amplitude as reference, as opposed to the a.m. signal's constant phase. While showing promise, the technique is not yet sufficiently developed to warrant publication.

### New UK group supports semiconductor manufacture

One of the first commercial ventures of the new British Technology Group formed by the merger of NRDC and NEB (News, September issue) is in an advanced field of semiconductor manufacture. This is a joint venture with the UK company Plasma-Therm Ltd, a subsidiary of Plasma-Therm Inc of Kresson, New Jersey, USA, who supply plasma process equipment (see below). The two partners will share the total cost of £170,000 of a two-year programme to develop new process control equipment for sale to European manufacturers of semiconductor devices. The equipment will be based on radio-frequency plasma

chemistry techniques, which offer advantages over traditional wet chemical methods used in the fabrication of semiconductor products.

A microprocessor-based monitoring system will be developed to give manufacturers more precise control in dry etching procedures based on radio-frequency plasmas by using optical emission spectroscopy. Also, a new power unit will be developed to complement Plasma-Therm's present range of radio frequency generators and so offer the ability to improve the adhesive qualities of plasma deposited passivation layers which protect the i.cs.

The agreement includes an arrangement for the NRDC part of BTG to recover its investment by a sales levy on relevant products.

Radio-frequency plasma chemistry techniques are being used more and more in making semiconductor devices, in place of wet chemical methods. One technical advantage is the ability to create the finer circuit patterns needed for producing a larger number of circuit elements per unit area. Certain gases, when ionized, form a reactive plasma which interacts with solid surfaces to selectively remove unwanted material without residual contamination.

# NEW PRODUCTS

## Micro-system fault finder


A fault finding routine for r.o.m., r.a.m., bus, clock and power supply of a microprocessor-based system can usually be carried out in under five minutes using the 9010A Micro-System Troubleshooter, regardless of system complexity, claim Fluke. Test programs need not be written since the 9010A has a 'learn' mode in which it examines and defines all the digital locations and functions of a working system and stores the information in its memory. When a similar but suspect system is connected to the tester the information from the working system is compared with that from the suspect equipment and any faults indicated on a 32-character alphanumeric display. The tester's programs, whether 'learnt' or presented manually, can be loaded onto cassette for future

use. Operators need not have a knowledge of programming language, and to use the tester, a plug from an eight or sixteen-bit processor module is inserted into the microprocessor socket of the system to be tested. If the system malfunction does not appear when the tester is connected the fault is narrowed down to the processor removed. The tester module contains a microprocessor which replaces the one removed from the board. Using other algorithms, the tester can be used to check peripherals such as character generators, keyboards, readouts, print-heads and relays. Modules can be obtained for testing 8080, 8085, Z80, 6502, 6800 or 9900 based systems. A further seven modules should become available within the next ten months. Fluke International Corporation, Colonial Way, Watford, Herts WD2 4TT.

WW301



WW301

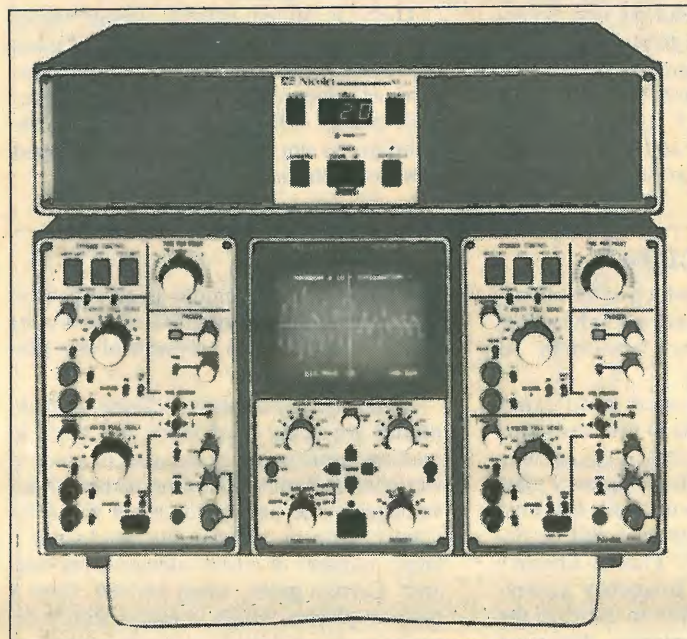

WW302



WW303

## Storage oscilloscope

The main unit of Nicolet's latest digital-storage oscilloscope is the 4094 with 16K-word  $\times$  16-bit memory capacity. Two dual-channel input-amplifier modules, the 4851 with 15-bit a-to-d conversion and 100kHz sampling rate and the 4562 with 12-bit conversion and 2MHz sampling, can be added to the main unit in any combination for either two or four-channel operation as the main unit's memory can be shared. Permanent waveform storage is possible using a single floppy-disc drive, the F-43, with a dual-channel oscilloscope or the XF-44 dual disc-drive with four-channel versions. Cursor positioning, display expansion (up to  $\times$  256), r.m.s. calculation and waveform addition, subtraction and inversion are standard on the 4094 and further programs for waveform multiplication, integration, etc, are available on disc. Both plug-in input amplifiers have pre- and post-trigger delay controls and where two amplifiers are used they can be operated independently thus forming two dual-channel oscilloscopes with a common display. An RS232 and IEEE488 i/o interface and digital plotter are available for use with the oscilloscope. The manufacturers have also introduced a small 4000-line FFT spectrum analyzer, the 100A, for 0 to 20kHz. Nicolet Instruments Ltd, Budbrooke Road, Warwick CV34 5XH.

WW302

## Softy 2

Following the success of Softy, a low-cost micro tool for e.p.r.o.m. programming, copying and r.o.m. emulation, the designer has recently introduced an enhanced version called Softy 2. This unit is similar to the original version which

displays the contents of 512 contiguous addresses in hex form on a television screen via an internal modulator. Improvements include an expanded monitor and keypad (28-key, two-level) to provide extra functions such as serial (RS232) and parallel (Centronics) routines for connection to other computer systems or printers. Code can also be stored on cassette tape using a new system called Transwift which is claimed to be tolerant of speed and level changes. The buffer r.a.m. has also been increased to 2K and the unit will now program or copy the 2716, 2732, 2532 family of single-rail e.p.r.o.ms. To make r.o.m. emulation easier, the address and data lines have been buffered and the unit is supplied with a ribbon cable and 24-pin plug. Softy is only available built and tested in a black plastic case and is supplied with a separate power supply for around £169 + v.a.t. Dataman Designs, Lombard House, 24 Cornwall Rd, Dorchester, Dorset DT1 1RS.

WW303

## Low-noise f.e.t. preamplifier

At 1MHz, the noise characteristic of the AH0013 linear wideband preamplifier is quoted as 800pV/ $\sqrt{\text{Hz}}$ . An f.e.t. input is used in this hybrid device giving a typical input impedance of 100G $\Omega$  and maximum bias-current requirement of 50pA. Sonar, audio, infrared detection and communication equipment applications are suggested for the device. Packaging is 8-pin d.i.l. and the operating temperature range is from  $-65^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . DI-AN Data Systems Ltd, Mersey House, Battersea Rd, Heaton Mersey, Stockport, Cheshire SK4 3EA.

WW304

## IEEE-programmable resistance box

Resistances from 1 $\Omega$  to 1M $\Omega$  in 1 $\Omega$  steps can be programmed through an IEEE-488 link from a microcomputer on the 9811 resistance/potential-divider box from Time Electronics. Manual resistance selection is also possible by means of thumbwheel switches on the front panel and in both modes the value is displayed on a six-digit l.c.d. Separate outputs for each other decade are provided so the unit can be used as a programmable potential divider. The resistance outputs are electrically isolated from the digital input. Maximum power dissipation, voltage and current rating of any resistance value are 1W, 100V and 1A respectively. Resistance-value error and temperature coefficient figures are  $\pm 0.1\%$  (for values above 100 $\Omega$ ) and 50 p.p.m./ $^{\circ}\text{C}$ . Both rack-mounting and free-standing versions can be supplied and operation through RS232 or parallel b.c.d. is possible using an IEEE converter. Time Electronics Ltd, Botany Industrial Estate, Tonbridge, Kent.

WW305


## High-voltage meter

Measurement of voltages up to 150kV with less than  $\pm 5\%$  error is claimed for this high-voltage meter. The Field Mill Voltmeter FM150, available through Hunting Hivolt, takes its reading from the field created by a voltage as opposed to measuring the potential difference directly, and is said to give negligible current drain. One switch is used to select 5kV, 25kV and 150kV ranges and battery check and on/off functions. The coupling cable between the measuring transducer and the control box can be any length (within reason, we suppose) without affecting the instrument's capabilities. Rechargeable batteries and charger are supplied as standard. Hunting Hivolt Ltd, Riverbank Works, Old Shoreham Rd, Shoreham by Sea, Sussex BN4 5FL.


WW306

## Hard-disc for micros


The Seagate 5 $\frac{1}{4}$ in Micro-Winchester disc-drive and intelligent controller have been added to the range of computer peripherals stocked by Euro Electronics Ltd. Fitting into the same space as a 'mini-floppy', the ST-506 hard-disc drive with two double-sided discs and four heads uses the same power supply as a 5 $\frac{1}{4}$ in floppy-disc but offers 5Mbytes of storage, 170ms access time (access time can be reduced by a half using software), data transfer at 5M-bit/s and a projected mean-time-between-failure of 8,000h. The hard-disc and a 5 $\frac{1}{4}$ in floppy-disc can be used together, the former providing large memory capacity and the latter system back-up and input/output.

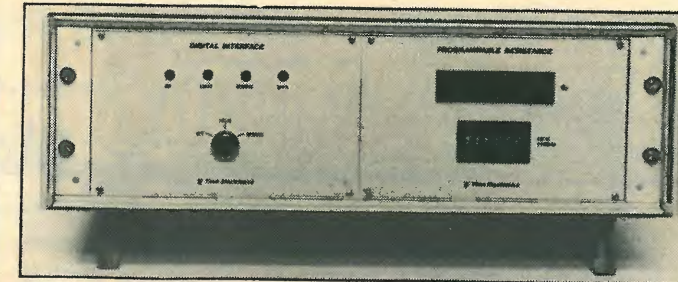


WW305

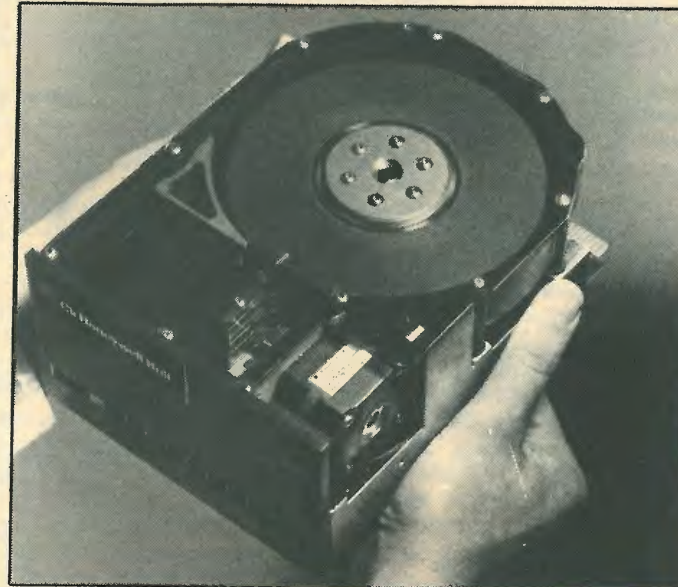

WW307

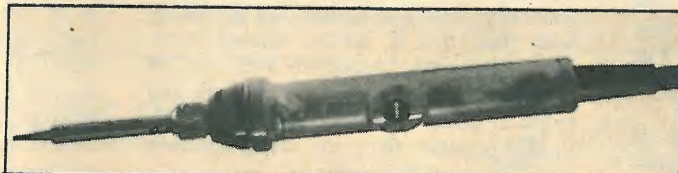

WW306

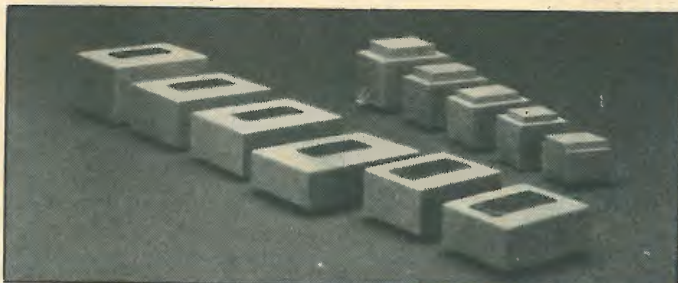

WW311

## Soldering irons

Power-control electronics and associated setting dial of Permax soldering irons are contained within the handle. An aluminium/ceramic base on which the heating element is printed is said to give good heat conductivity combined with high electrical insulation; 17 $\frac{1}{2}$ W versions have an average leakage current of 0.78 $\mu\text{A}$  (19pF) and 26W versions 1.1 $\mu\text{A}$  (22pF). To aid heat transfer, the flat heating element fits directly into a slit in the iron's alloy coated tip. Both versions can be obtained for 220V or 240V mains operation at around £20 and a wide range of easily interchangeable tips are manufactured for these irons. Special Products Distributors Ltd, 81 Piccadilly, London W1V 0HL.

WW308


## Current regulator diodes

Two-lead constant-current sources in eight values from 0.24mA to 4.3mA are available through Semiconductor Specialists. The Siliconix CRR range diodes can be operated at temperatures from  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$  and have a temperature coefficient rating of 0.15%/ $^{\circ}\text{C}$ . For each type, the maximum operating voltage is 100V; limiting voltages for the 0.24mA and 4.3mA types are 0.5V and 1.45V respectively. These regulators are housed in TO-18 packages. Semiconductor Specialists (UK) Ltd, Carroll House, 159 High St, Yiewsley, West Drayton, Middx UB7 7XB.

WW309

## Small lever-locking switches

Accidental switching of the M range miniature switches is prevented by inclusion of a lever-locking system. The lever ends are interchangeable to facilitate colour coding. Ratings of these switches are: 6A at 125V a.c. and 3A at 250V a.c. (resistive), 500V insulation breakdown and 1G $\Omega$  insulation re-

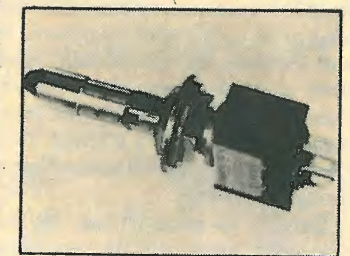

sistance. Versions are available with 1, 2, 3 or 4 poles, either gold or silver-plated contacts, and with sealed casings. NSF Ltd, Switches and Controls, Keighley, Yorkshire BD21 5EF.

WW310

## Small transformers

Two ranges of small p.c.b.-mounting encapsulated transformers have been introduced to the market by Clairtronic. Transformers in the 'flat' range have power ratings from 3 to 25VA in standard voltage ratings of 6, 12, 15 or 20V secondary, 240V primary. Four mounting screw holes are provided on each unit. The smallest version measures 44 $\times$ 53 $\times$ 17mm and the largest 69 $\times$ 58 $\times$ 35mm. In each case the third dimension, the height, is excluding 5mm long pins. A series of 'top-cap' types are also available in the same range of secondary voltages but with split primaries (2 $\times$ 120V) and power ratings from 0.8 to 25VA. Screw mounting holes are provided for versions above 8VA. Dimensions of the 0.8VA version are 27 $\times$ 27 $\times$ 20mm and of the 25VA type, 80 $\times$ 54 $\times$ 47mm. Prices range from around £1.20 for the smallest 'top-cap' type to around £4.50 for the largest 'flat' type. Clairtronic Ltd, 6 Wayside Gardens, Gerrards Cross, Bucks.

WW311

# SIDEBANDS

By Mixer

## Basic holidays

For as long as I can remember, I've been very much in favour of lots of healthy exercise. I can sit around and watch people playing games, digging gardens and jogging round the park all day long without feeling any the worse for it, and I'm sure it has all helped to shape my easy-going and tolerant outlook on life.

Those summer camps for kids in America have, likewise, long been a focus of admiration for me: a stroke of absolute genius, I've often thought. We British have developed hypocrisy to a pretty exceptional level, but whoever thought of those camps has nothing to learn from us. No sooner do the 2.4 brats come belting home from school for the summer holidays than they are given a hose down, provided with enough of everything to avoid the need for further communication in the foreseeable future and packed off to the hinterland to be coped with by others, while Ma and Pa take off for the sun. And it's all done in such a way that even the kids themselves, and probably the parents too, sometimes, think it's a Good Thing. The Outdoor Life, and all that. That's what I thought, anyway.

But it's all gone wrong. No longer do emergent Americans go on long walks, swim, climb grizzly bears and fish for waffles. What they do now is compute! In short pants and deadly seriousness, they are hooked on computing.

I haven't been able to find out any more details except that, at the camp I've heard of, the kids are turned loose on the computers at the crack of dawn and, apart from a few seconds to swallow a pecan pie washed down with a glass of clam chowder (I really must try to discover what all these things are) stick with it till sack-time, as I believe it is called. According to the man who runs the operation, it is quite difficult, short of resorting to the garrotte, to stop the little people computing away like crazy when it is time for the Sandman to come and put sleep in their eyes. What they compute, I have no idea. Perhaps it's the answer to imaginary questions such as "Why aren't I in Florida with Mom and Pop?"

## Oasis

I've always been a bit envious of anyone who can eat snails, or mussels, or oysters, or sheep's eyes or any of those things with evident relish and without any apparent coercion. There must be a lot I'm missing by being so pernickety, but even just writing about eating oysters is making me feel all peculiar. It isn't just the dishes themselves, either, that make me curl up

— you only have to mention sheep's eyes when there is a hard-boiled egg with the salad to put me right off. Association, you see, that's what it is.

I hope this flaw in my make-up isn't characteristic of the majority of c.b. enthusiasts, because the fraternity now has its own restaurant: its name — The Eyeball Bistro. It's in Princes Street, near Oxford Circus. Of course, it doesn't mean they're going to serve eyeballs (it doesn't, does it?) but the damage is done, so far as I am concerned. Why couldn't they call it 'The Breaker Bistro' or 'Eighty-eights' and accept the risk of being overwhelmed by demolition workers or bingo players?

Further grounds for misgivings arise from the declared intention to print the menu in c.b. jargon. Now, at that point, I do really think one has to demur. With something as serious as food and drink, there must be no room for misunderstanding, and this idea is a most dangerous precedent. I realise that menus are sometimes written in French for reasons of snobbery, but I've learned to get along with that, and it doesn't change every other fortnight. "Superslab with i.cs, in tears" is no way to talk about steak and chips in onion gravy and I do most earnestly suggest that, on compassionate grounds, the idea is dropped.

## Postillions beware!

Translation by computer of foreign languages has always been good for a laugh. There was a story that a lucrative civil engineering contract was once turned down because the contract, translated by computer from the Russian, insisted that a flock of water-sheep would be needed. Since the company didn't have anywhere to keep the animals, and couldn't find out what they were anyway, it decided to forget the whole thing and work for the Arabs, instead. So a German company, whose sales manager knew how to translate the Russian for 'hydraulic ram', got the job.

But we're over all that sort of thing now. At least, I hope we are, because the EEC is wanting to use a new system, Eurotra, which they hope will be able to cope with the 72 language pairs in use in the community when Portugal and Spain get their tickets — that's each of nine languages translated into all the other eight.

So it had better be a good system, and it ought really to be able to handle the odd bit of idiom, slang and dialect. The thought of a British MEP, infuriated by yet another bland explanation of why butter mountains and wine lakes are not bad

economics, rising to his feet and bellowing "What a load of old cobblers!" is a sombre one. Unless Eurotra can deal effectively with vituperative outbursts of this kind, there are problems ahead. One can imagine the blind panic which would be the natural result of the foregoing innocent remark: proceedings would be halted while the premises were searched for the elderly shoemakers and the whole fabric of civilized Community life would be imperilled.

Maybe Esperanto would be a better idea.

## Man-powered flight


Pilots have a lot to cope with. It isn't all just a matter of sitting there, looking at the pretty clouds and sending the air hostess for cups of coffee every few minutes: not by any manner of means. It might be like that some of the time, I dare say, but every now and then their reactions are put to the test when things go wrong. You don't want to be too relaxed when, for example, an engine goes on strike just after take-off, or when the controller tells you that another aircraft is making a head-on approach at a closing speed of around 1200 knots.

To help pilots get used to little problems of this kind, airlines make use of flight simulators, which can be programmed with all kinds of 'failure'. Accelerations, visual effects and sounds are provided to make the simulation as realistic as it can be, the sounds being recorded in a real aircraft and played back under the control of the simulator.

Clearly, as many sounds as possible are needed, but a chap I know who used to record the aircraft noises tells me there was one he never could get in the normal way. Birds are unco-operative little beasts, and he found it quite difficult to persuade them to fly into windscreens to order so he could record the splat and allow birdstrikes to be simulated on the ground.

So, I am about to explain a bizarre little scene which someone may have seen and wondered about (though not for long, probably — the world is full of strange people). What they had to do, it seems, was to buy some frozen, oven-ready chickens from Sainsbury's, thaw them out and give them to several brawny characters with good right arms. On the word of command, the chaps hurled the fowls with considerable enthusiasm at the aircraft's nose cone, while the tape recorder inside collected the bangs. Played back at a higher speed, it gave just the right effect and everyone (except the chickens) was happy.

## World's most powerful BASIC pocket computer CASIO FX-702P

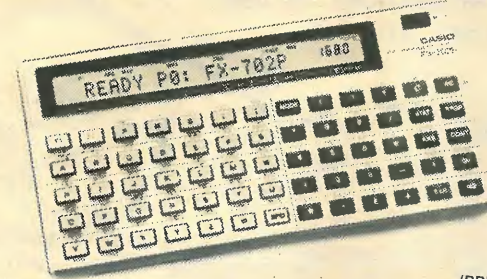

(RRP £134.95)  
**ONLY £119.95**

High-speed computer using BASIC Language, with program/data storage on cassette tape via optional FA-2 adaptor.  
AVAILABLE SOON: Plug-in ROM program modules and FP-10 Mini Printer for program/data printout.  
LCD dot matrix scrolling display. Input can be varied from 1680 program steps, with 26 independent memories, to 80 program steps with 226 memories, all protected (non-volatile). Up to 10 programs (P0 to P9) can be stored.  
Subroutines: 10 levels. FOR NEXT looping, 8 levels.  
Debugging by tracing. Editing by moving cursor.  
55 built-in functions including Regression Analysis and Correlation Coefficient all usable in programs. Program/data storage on cassette tape. Two lithium batteries give approximately 200 hours continuous use, with Auto Power Off after 6 mins. disuse.  
Dimensions: 17 x 165 x 82mm (5/8 x 6 1/2 x 3 1/4"). Weight 180g (6.3oz).  
**FX-602P** Advanced programmable. Up to 512 steps **£74.95**  
**★★★NEW★★★ FX-3600P** 38 program steps **£22.95**

# TEMPUS

WW - 072 FOR FURTHER DETAILS

## World's most versatile alarm chronograph watch CASIO AX-210



10 alternative displays  
Over 60 useful functions  
ANALOGUE display of time plus:—  
★ Digital time display, 12 or 24 hour system.  
★ Digital date, month and year, plus day flag.  
★ Full month calendar display, current month.  
★ Full month calendar display, next month.  
Auto calendar pre-programmed to the year 2029.  
Dual time modes  
★ ANALOGUE display of local time, plus digital second time zone, 12 or 24 hour system.  
Alarm mode  
★ ANALOGUE time with "Alarm Set" digital time, 24 hour system. AM/PM and "alarm on" indicators.  
★ Buzzer for 20 seconds, or select "Dixieland" "Greensleeves" or "My Darling Clementine."  
Hourly time signal  
★ "Big Ben" chimes at noon. Easily switched on or off.

(RRP £34.95)  
**ONLY £29.95**

Countdown alarm timer mode  
★ Amazing ANALOGUE display, plus digital countdown. Normal and net times from 1 to 60 minutes with automatic retrieval of pre-entered time.  
Stopwatch mode  
★ ANALOGUE countup, with digital timing of net, lap and first and second place times from 1/100 sec to 1 hour. Confirmation signal.  
Easy setting of times and alarm with forward and backward stepping and rapid run facility. Dimensions: 9.25 x 35 x 36mm approx. Mineral glass. Long life lithium battery. Accuracy +/- 15 seconds/month.  
SHORT FORM CATALOGUE ON REQUEST. 14p stamp appreciated.  
Delivery normally by return of post. Prices include VAT and P&P. Send your cheque, P.O. or phone your ACCESS OR B'CARD number to:

**THE LEADING U.K. SPECIALISTS**  
Dept. W.W.  
164/167 East Road, Cambridge CB1 1DB  
Telephone: 0223 312866

## THE W.W. DISK OFFER RE-OPENS AT LAST

We have obtained a limited stock of European single sided mini floppy drives so please get orders in soon

Circle the enquiry number for data  
Total U.K. price including VAT at 15% and carriage, CWO  
**ONLY £155 EACH INCLUSIVE**  
(Drive £132, P and P £2.78, VAT £20.22)

Please make cheques and P.O.s payable to  
**W.W. Disk Offer** and send to:  
**W.W. DISK OFFER**  
49 Milford Hill  
Batford  
Herts

Please call **0582-429122** to check on availability before ordering

Allow 21 days for delivery. This offer applies to U.K. only and is subject to availability. For non U.K. orders send SAE for quotation

WW - 051 FOR FURTHER DETAILS

ANGLIA COMPONENTS

FROM STOCK

ROAD, WISBECH, PE13 2PS

BURDETT ROAD, CAMBS., TEL: 0945 3281

ANGLIA COMPONENTS

FROM STOCK

ROAD, WISBECH, PE13 2PS

BURDETT ROAD, CAMBS., TEL: 0945 3281

ANGLIA COMPONENTS

FROM STOCK

ROAD, WISBECH, PE13 2PS

BURDETT ROAD, CAMBS., TEL: 0945 3281

ANGLIA COMPONENTS

FROM STOCK

ROAD, WISBECH, PE13 2PS

BURDETT ROAD, CAMBS., TEL: 0945 3281

ANGLIA COMPONENTS

FROM STOCK

ROAD, WISBECH, PE13 2PS

BURDETT ROAD, CAMBS., TEL: 0945 3281

ANGLIA COMPONENTS

FROM STOCK

ROAD, WISBECH, PE13 2PS

BURDETT ROAD, CAMBS., TEL: 0945 3281

# HAMEG OSCILLOSCOPES

Top Performance  
In Every Range



HM 307

**HM 307 £138**  
Y: Bandwidth DC-10MHz (-3dB) • Sensitivity 5mV-20V/cm (±5%)  
X: Timebase 0.2s-0.2µs/cm (±5%) • Triggering 2Hz-30MHz (3mm)  
Built-in component tester • Calibrator • Screen 6x7cm • 1kV


**HM 312 £220**  
Y: Bandwidth DC-20MHz (-3dB) • Sensitivity 5mV-20V/cm (±3%)  
X: Timebase 0.2s-40ns/cm incl. x5 Magn. • Trig. 3Hz-30MHz (4mm)  
Dual trace • X-Y Operation • Calibrator • Screen 8x10cm • 2kV

**HM 412 £350**  
Y: Bandwidth DC-20MHz (-3dB) • Sensitivity 2mV-20V/cm (±3%)  
X: Timebase 2s-40ns/cm incl. x5 Magn. • Trig. DC-40MHz (5mm)  
Dual trace • Algebr. addition • X-Y Operation • Screen 8x10cm  
Sweep delay • Overscan, Trigger, Delay indications • Trigger filter  
Z-Modulation • Calibrator • Graticule illumination • 2kV

**HM 512 £580**  
Y: Bandwidth DC-50MHz (-3dB) • Sensitivity 5mV-50V/cm (±3%)  
X: Timebase 5s-20ns/cm incl. x5 Magn. • Trig. DC-70MHz (5mm)  
Dual trace • Algebr. addition • X-Y Operation • Screen 8x10cm  
Delay line • Sweep delay • After delay triggering • Trigger filter  
Single shot + Reset • Overscan, Trigger, Ready, Delay indications  
var. Hold-off • Z-Modulation • Graticule illumination • 12kV

**HM 812 £1,458**  
Y: Bandwidth DC-50MHz (-3dB) • Sensitivity 5mV-50V/div. (±3%)  
X: Timebase 5s-20ns/div. incl. x5 Magn. • Trig. DC-70MHz (0.5div.)  
Dual trace analog storage with var. Persistence and Auto-Storage  
Algebr. addition • X-Y Operation • Screen 8x10div. (7.2x9cm)  
Delay line • Sweep delay • After delay triggering • Trigger filter  
Single shot • Overscan, Trigger, Ready, Delay, AS indications  
var. Hold-off • Z-Modulation • X-Guard circuit • Calibrator • 8.5kV

HM 812  
Storage

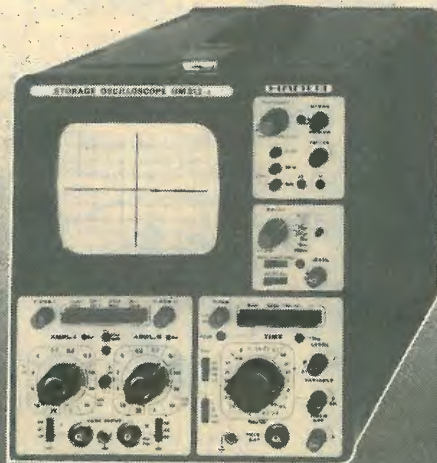

For more information  
contact:

Prices U. K.  
List Ex. VAT


**HAMEG LTD.** 74-78 Collingdon Street LUTON  
Bedfordshire LU1 1RX Telephone (0582) 413174 Telex 825484

WW - 077 FOR FURTHER DETAILS

## TRUE AS AN 'ARROW'

Professional Wire and Cable Fasteners  
for all installation requirements.

TELEPHONE - ELECTRONICS  
COMMUNICATIONS - ALARM  
SYSTEMS, ETC.,

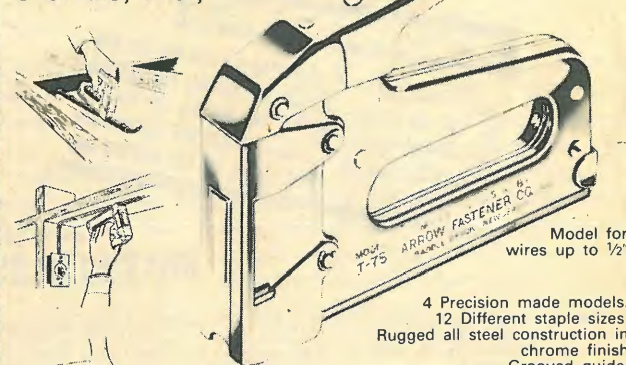

Model for  
wires up to 1/2"

4 Precision made models.  
12 Different staple sizes.  
Rugged all steel construction in  
chrome finish  
Grooved guide.  
Grooved driving blade.  
Tapered striking edge.  
Jam-proof mechanism (patented).  
Short span easy compression handle.

Some of the features that make an Arrow cable fastener  
the outstanding tool for all installation engineers.

Illustrated literature and details of Staple sizes  
available from:

**SPECIAL PRODUCTS  
DISTRIBUTORS LTD.**

81 PICCADILLY, LONDON W1V 0HL. Tel: 01 629 9554. Telex 265200 (A B RACEN)  
- Cables Specprod London W1.

WW - 068 FOR FURTHER DETAILS

## SWITCHCRAFT XLR CONNECTORS

Line Female A3F.....£1.18 Chassis Female D3F.....£1.57  
Line Male A3M.....£1.00 Chassis Male D3M.....£0.83

4, 5, 6 and 7 versions and large selection audio adaptors available

**NEUTRIK XLR CONNECTORS**  
Latchless Chassis NC3-FZ.....£0.67 Latchless Chassis Male NC3-MZ.....£0.59  
Line Female NC3-FD.....£1.34 Line Male NC3-MC.....£1.15  
Female Chassis NC3-FP.....£1.65 Chassis Male NC3-MP.....£0.87

4, 5 and Black Versions and large selection of Audio Adaptors available

**XLR LNE MAIN SERIES**  
XLR LNE 11C.....£3.87 XLR LNE 12C.....£3.76  
XLR LNE 32.....£2.89 XLR LNE 31.....£4.14

**BELCLERE AUDIO TRANSFORMERS**  
EN6422 Ratio + 1.2 + 2. Freq. 40Hz-35KHz. PRI 150/600Ω. sec. 600/2.4KΩ.....£3.64  
EN6423 Ratio 1 + 1.6.45 + 6.45. Freq. 40Hz-25KHz. PRI 150/600Ω. sec. 6.25K/25KΩ.....£3.64  
SKT-723 MuMetal Screening can, 39dB reduction 50Hz ext. field.....£1.15  
Trade enquiries welcome; quantity discounts available. All prices subject to V.A.T. Call, write or  
phone. Min. order £10. Please add £1 postage. Access, Amex, Barclaycard.

**KELSEY ACOUSTICS LTD.**  
28 POWIS TERRACE, LONDON W11 1JH  
01-727 1046/0780

WW - 038 FOR FURTHER DETAILS

## STILL THE LOWEST PRICED, QUALITY PERFORMANCE AUDIO SIGNAL GENERATOR AVAILABLE ANYWHERE

Distortion  
lower  
than .002%  
10Hz-100KHz

**£41.50**  
(Kit £35.65)




1v RMS  
variable  
output  
Sine/square

P. & P. £2


Based on Linsley Hood design. Prices from £41.50 (pp £2)  
TELERADIO ELECTRONICS, 325 Fore Street, London N9 0PE  
Tel: 01-807 3719. Closed Thursdays  
SAE for leaflets. Also RF Sig. Gen., Function Gen., Frequency Meters  
THD Analyser, SWR Meters, MVMT

# Quite simply the best way to make music ...

Prices to suit every pocket  
Complete kits from £33-£320 !

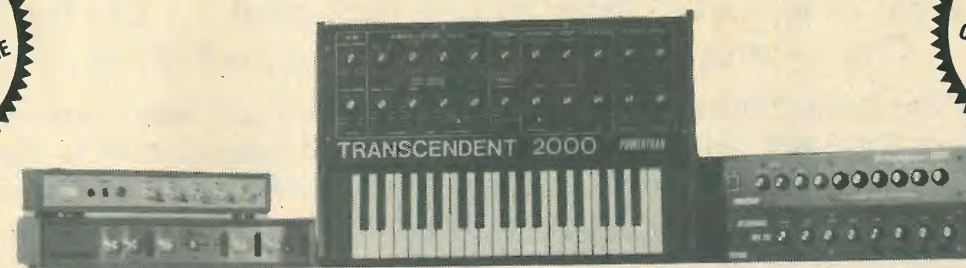

● COMPREHENSIVE INSTRUCTIONS WITH EVERY KIT ● KITS REALLY COMPLETE - EVEN SCREWS AND WIRE! ●

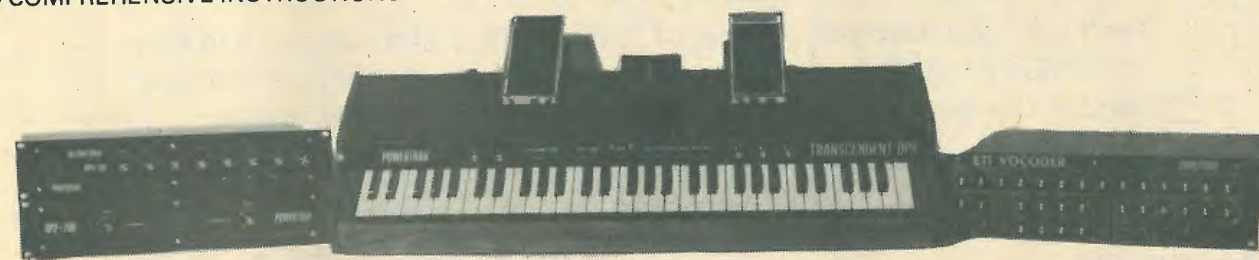

● SUPERIOR MATERIALS ● SUPERIOR FINISH ● SUPERIOR SOUND ●



● AND REMEMBER D.I.Y. SAVES YOU £s ●



# ...build the *TRANSCENDENT* range from *POWERTRAN*

- WORLD LEADERS IN ELECTRONIC KITS
- MONEY-BACK GUARANTEE (If you are not completely satisfied with your Powertran Kit, return it in original condition within 10 days and we will refund your money.)
- SOLDERING PRACTICE KIT - FREE on request with your first kit, to assist newcomers!

PORTWAY INDUSTRIAL ESTATE, ANDOVER, HANTS. SP10 3MM - ANDOVER (0264) 64455

# electronics today

INTERNATIONAL

The November issue of Electronics Today International features no less than 100 circuits designed for ETI by Tim Orr — amplifiers, timers, alarms and filters.

Build the main constructional project — an advanced music processor incorporating auto double tracking, phasing and flanging effects. There are four available scan speeds and the effects can be operated manually or in one shot mode by button or foot switch or left free running. All electronic switching of DC control signals offers noiseless effects change-over.

Don't miss this bumper edition of Britain's best electronics magazine. ETI NOVEMBER — 100 brand new circuits, a sophisticated music processor design, constructional projects, regular features and news from the world of electronics.

ON SALE—OCTOBER 2nd  
ONLY 65p at your newsagent

100 CIRCUITS ISSUE!!

## SOUTH MIDLANDS COMMUNICATIONS LIMITED



### JOIN THE MICRO REVOLUTION WITH YC1000L DATA LOGGER

This new laboratory grade instrument features microprocessor control for increased versatility. Its many functions include — a frequency counter (0.02 ppm accuracy), a precision A.C./D.C. voltmeter, thermal sensor and a programmable timer. The test results may be read direct from the Digital display or recorded on the integral logger.

We are currently offering the YC1000L at the UNBELIEVABLE price of £680 plus V.A.T. Should you require further information on this or any of our other products please write TODAY.

SOUTH MIDLANDS COMMUNICATIONS LTD.  
Osborne Road, Totton, Southampton SO4 4DN, England  
Tel: TOTTON (0703) 867333 - Telex: 477351 SMCMMG

WW - 056 FOR FURTHER DETAILS

### RF POWER TRANSISTORS — EX-STOCK

TYPE	£	TYPE	£	TYPE	£	TYPE	£
2N3137	1.88	2N4933	7.80	BLX13C	15.05	BLY53A	7.33
2N3375	5.27	2N5070	10.09	BLX14	25.70	BLY53AP	7.33
2N3553	1.09	2N5071	12.10	BLX65	1.67	BLY55	9.40
2N3632	6.03	2N5090	8.44	BLX66	4.91	BLY83	7.45
2N3733	6.13	2N5102	9.44	BLX67	5.41	BLY84	7.25
2N3866	0.92	2N5590	7.85	BLX68	7.29	BLY85	6.02
2N3924	1.66	2N5591	10.21	BLX69A	21.15	BLY87A	6.43
2N4040	9.29	2N5641	4.68	BLX91A	8.84	BLY87C	6.43
2N4041	10.97	2N5642	8.11	BLX92A	13.06	BLY88A	8.66
2N4127	9.18	2N5643	12.44	BLX93A	19.19	BLY88C	9.16
2N4128	11.03	2N5913	2.34	BLX94A	35.79	BLY89A	12.65
2N4429	9.89	2N6080	5.94	BLX95	44.59	BLY89C	11.90
2N4430	11.30	2N6081	9.87	BLX98	84.95	BLY91A	6.95
2N4431	11.30	2N6082	10.17	BLY33	1.87	BLY91C	6.90
2N4932	5.60	2N6083	11.08	BLY34	1.07	BLY92A	9.25
		2N6084	12.27	BLY35	7.50	BLY92C	9.06
				BLY36	6.60	BLY93A	13.40
						BLY93C	11.40

### COMMUNICATION TUBES — EX-STOCK

TYPE	£	TYPE	£
4-65A	35.10	6155-QY3-125	47.30
4-125A	42.90	6155-QY3-125(AEL)	22.40
4-250A	48.80	6156-QY4-250	45.30
4-400A	58.20	6883B	4.30
4-1000A	269.10	7527-QY4-400	50.44
4CX250B	26.50	7854-YL1060	53.80
4CX350A	42.20	8042	16.50
4CX1500A	413.00	A2426	19.25
4CX1500B	316.40	QQV03-10	5.60
4X150A	24.70	QQV03-10(AEL)	2.54
4X500A	175.00	QQV03-20A	35.75
5B254M	23.40	QQV03-20A(AEL)	17.20
5B255M	23.40	QQV06-40A	43.60
6F33(AEL)	15.62	QQV06-40A(AEL)	10.40
12E1	16.94	QQV07-50	68.00
13E1	141.00	QV08-100	125.00
5763	3.25	QY5-3000A	234.00
6080	5.40	TBL2-300	286.00
6146A	3.80	TT21	18.00
6146B	4.07	TT22	19.75

SEND NOW FOR PRICE LISTS SHOWING QUANTITY DISCOUNTS

## AEL EXPORT SPECIALIST

SEND FOR DETAILS TO  
AERO ELECTRONICS (AEL) LTD  
GATWICK HOUSE  
HORLEY SURREY ENGLAND  
TEL: 02934 5353  
TELEX 87116 (AERO G)  
CABLES AERO G TELEX HORLEY

WW - 043 FOR FURTHER DETAILS

TTLs by TEXAS		74LS SERIES		93 SERIES		74S SERIES		74S114		TRANSISTORS		BFR40		TIP30A		2N3442		3N141		6A	
7400	11p	74LS00	12p	9301	18p	74S00	60p	74S114	120p	2N3442	25p	BFR41	25p	TIP30C	60p	2N3553	240p	3N201	110p	6A 100V	80p
7401	11p	74LS01	14p	9302	175p	74S01	60p	74S132	300p	2N3554	25p	BFR79	25p	TIP31A	58p	2N3643/4	48p	3N204	120p	6A 400V	100p
7402	12p	74LS02	14p	9306	316p	74S02	75p	74S158	160p	2N3702/3	48p	BFR80	25p	TIP32A	62p	2N3702/3	48p	40290	250p	10A 400V	200p
7403	14p	74LS03	14p	9310	275p	74S03	75p	74S198	225p	2N3704/5	12p	BFX23	40p	TIP33A	60p	2N3704/5	12p	40361/2	75p	25A 400V	400p
7404	14p	74LS04	15p	9311	275p	74S04	60p	74S139	225p	2N3706/7	14p	BFX24	40p	TIP33B	90p	2N3706/7	14p	40409	100p	ZENERS	
7405	18p	74LS05	15p	9312	160p	74S05	60p	74S157	250p	2N3708/9	12p	BFX25	40p	TIP33C	114p	2N3708/9	12p	40410	100p	2.7V-33V	
7406	27p	74LS06	18p	9314	165p	74S06	60p	74S174	250p	BFX26/7	30p	BFX26/7	30p	TIP34A	115p	2N3773	300p	40411	300p	400mW	5p
7407	27p	74LS07	15p	9316	225p	74S07	60p	74S175	320p	BFX28	30p	BFX28	30p	TIP34C	160p	2N3819	25p	40414	120p	1W	19p
7408	18p	74LS08	15p	9321	225p	74S08	60p	74S194	350p	2N3820	50p	BFX29	30p	TIP34E	90p	2N3820	50p	40416	120p		
7409	18p	74LS11	15p	9322	150p	74S11	60p	74S194	350p	2N3822	70p	BFX30	30p	TIP35A	290p	2N3822	70p	40417	100p		
7410	15p	74LS13	25p	9334	360p	74S13	60p	74S241	450p	2N3823	90p	BFX31	30p	TIP35C	270p	2N3823	90p	40418	100p		
7411	20p	74LS14	45p	9338	250p	74S14	60p	74S285	300p	2N3826	70p	BFX32	30p	TIP36A	340p	2N3826	70p	40419	100p		
7412	20p	74LS15	45p	9370	300p	74S15	60p	74S373	400p	2N3830	90p	BFX33	30p	TIP36C	400p	2N3830	90p	40420	100p		
7413	25p	74LS21	15p	9374	200p	74S21	60p	74S374	400p	2N3832	90p	BFX34	30p	TIP36E	270p	2N3832	90p	40421	100p		
7414	35p	74LS22	20p							2N3836	90p	BFX35	30p	TIP36E	270p	2N3836	90p	40422	100p		
7414C	60p	74LS26	20p							2N3840	90p	BFX36	30p	TIP36E	270p	2N3840	90p	40423	100p		
7416	25p	74LS27	18p							2N3842	90p	BFX37	30p	TIP36E	270p	2N3842	90p	40424	100p		
7417	25p	74LS30	15p							2N3844	90p	BFX38	30p	TIP36E	270p	2N3844	90p	40425	100p		
7420	17p	74LS32	18p							2N3846	90p	BFX39	30p	TIP36E	270p	2N3846	90p	40426	100p		
7421	30p	74LS37	18p							2N3848	90p	BFX40	30p	TIP36E	270p	2N3848	90p	40427	100p		
7422	20p	74LS38	18p							2N3850	90p	BFX41	30p	TIP36E	270p	2N3850	90p	40428	100p		
7423	22p	74LS42	40p							2N3852	90p	BFX42	30p	TIP36E	270p	2N3852	90p	40429	100p		
7425	28p	74LS44	40p							2N3854	90p	BFX43	30p	TIP36E	270p	2N3854	90p	40430	100p		
7426	30p	74LS51	15p							2N3856	90p	BFX44	30p	TIP36E	270p	2N3856	90p	40431	100p		
7427	25p	74LS55	30p							2N3858	90p	BFX45	30p	TIP36E	270p	2N3858	90p	40432	100p		
7428	30p	74LS73	25p							2N3860	90p	BFX46	30p	TIP36E	270p	2N3860	90p	40433	100p		
7430	15p	74LS74	20p							2N3862	90p	BFX47	30p	TIP36E	270p	2N3862	90p	40434	100p		
7432	25p	74LS75	20p							2N3864	90p	BFX48	30p	TIP36E	270p	2N3864	90p	40435	100p		
7433	27p	74LS76	20p							2N3866	90p	BFX49	30p	TIP36E	270p	2N3866	90p	40436	100p		
7437	27p	74LS83	45p							2N3868	90p	BFX50	30p	TIP36E	270p	2N3868	90p	40437	100p		
7438	30p	74LS85	45p							2N3870	90p	BFX51	30p	TIP36E	270p	2N3870	90p	40438	100p		
7440	35p	74LS86	45p							2N3872	90p	BFX52	30p	TIP36E	270p	2N3872	90p	40439	100p		
7441	70p	74LS90	35p							2N3874	90p	BFX53	30p	TIP36E	270p	2N3874	90p	40440	100p		
7442A	50p	74LS92	40p							2N3876	90p	BFX54	30p	TIP36E	270p	2N3876	90p	40441	100p		
7445	60p	74LS93	35p							2N3878	90p	BFX55	30p	TIP36E	270p	2N3878	90p	40442	100p		
7446A	53p	74LS95	45p							2N3880	90p	BFX56	30p	TIP36E	270p	2N3880	90p	40443	100p		
7447	45p	74LS96	45p							2N3882	90p	BFX57	30p	TIP36E	270p	2N3882	90p	40444	100p		
7448	45p	74LS107	45p							2N3884	90p	BFX58	30p	TIP36E	270p	2N3884	90p	40445	100p		
7450	17p	74LS109	30p							2N3886	90p	BFX59	30p	TIP36E	270p	2N3886	90p	40446	100p		
7451	17p	74LS112	34p							2N3888	90p	BFX60	30p	TIP36E	270p	2N3888	90p	40447	100p		
7453	17p	74LS113	34p							2N3890	90p	BFX61	30p	TIP36E	270p	2N3890	90p	40448	100p		
7454	17p	74LS114	34p							2N3892	90p	BFX62	30p	TIP36E	270p	2N3892	90p	40449	100p		
7460	17p	74LS122	42p							2N3894	90p	BFX63	30p	TIP36E	270p	2N3894	90p	40450	100p		
7470	36p	74LS123	50p							2N3896	90p	BFX64	30p	TIP36E	270p	2N3896	90p	40451	100p		
7472	30p	74LS124	42p							2N3898	90p	BFX65	30p	TIP36E	270p	2N3898	90p	40452	100p		
7473	30p	74LS125	30p							2N3900	90p	BFX66	30p	TIP36E	270p	2N3900	90p	40453	100p		
7474	30p	74LS126	30p							2N3902	90p	BFX67	30p	TIP36E	270p	2N3902	90p	40454	100p		
7475	38p	74LS132	45p																		




**20 POWER AMPS**

**19 FUNCTIONAL MODULES**

# DAWN OF A NEW ERA



**POWER UP TO 480 WATTS RMS SINGLE CHANNEL**



AMPLIFIER WITH HEAT SINK




PLATE TYPE



PSU

## Which amplifier?

I.L.P. Amplifiers now come in three basic types, each of which is available with or without heatsink. Having decided the system you want - home hi-fi (models HY30, 60 or 120 for example), super quality hi-fi with extra versatility (MOS120, MOS200) or Disco/PA/Guitar (HD120, HD200 or HD400) you will then decide whether amplifiers housed within their own heatsinks or plate amplifiers for bolting to a metal chassis will suit. With choice such as this and a brilliant new range of I.L.P. functional modules to choose from you now have the chance to build the finest audio system ever offered to the constructor.

BIPOLAR Standard, with heatsinks										Without heatsinks				
MODEL NUMBER	OUTPUT POWER Watts rms	DISTORTION			SUPPLY VOLTAGE TYP/MAX	SIZE mm	WT gms	PRICE	VAT	MODEL NUMBER	SIZE in mm	WT gms	PRICE	VAT
		T.H.D. Typ at 1kHz	I.M.D. 60Hz/7kHz 4:1											
HY30	15w 4-8Ω	0.015%	<0.006%	±18±20	76x68x40	240	£7.29	£1.09						
HY60	30w 4-8Ω	0.015%	<0.006%	±25±30	76x68x40	240	£8.33	£1.25						
HY120	60w 4-8Ω	0.01%	<0.006%	±35±40	120x78x40	410	£17.48	£2.62	HY120P	120x26x40	215	£15.50	£2.33	
HY200	120w 4-8Ω	0.01%	<0.006%	±45±50	120x78x50	515	£21.21	£3.18	HY200P	120x26x40	215	£18.46	£2.77	
HY400	240w 4Ω	0.01%	<0.006%	±45±50	120x78x100	1025	£31.83	£4.77	HY400P	120x26x70	375	£28.33	£4.25	

Protection: Load line, momentary short circuit (typically 10 sec) Slew rate: 15V/μs Rise time: 5μs  
S/N ratio: 100db Frequency response (-3dB): 15Hz - 50kHz  
Input sensitivity: 500mV rms Input impedance: 100kΩ Damping factor: (8Ω/100Hz)>400

HEAVY DUTY with heatsinks										Without heatsinks				
MODEL NUMBER	OUTPUT POWER Watts rms	DISTORTION			SUPPLY VOLTAGE TYP/MAX	SIZE mm	WT gms	PRICE	VAT	MODEL NUMBER	SIZE in mm	WT gms	PRICE	VAT
		T.H.D. Typ at 1kHz	I.M.D. 60Hz/7kHz 4:1											
HD120	60w/4-8Ω	0.01%	<0.006%	±35±40	120x78x50	515	£22.48	£3.37	HD120P	120x26x50	265	£19.84	£2.98	
HD200	120w/4-8Ω	0.01%	<0.006%	±45±50	120x78x60	620	£27.38	£4.11	HD200P	120x26x50	265	£23.63	£3.54	
HD400	240w/4Ω	0.01%	<0.006%	±45±50	120x78x100	1025	£38.63	£5.79	HD400P	120x26x70	375	£34.28	£5.14	

Protection: load line, PERMANENT SHORT CIRCUIT (ideal for disco/group use should evidence of short circuit not be immediately apparent). The Heavy Duty range can claim additional output power devices and complementary protection circuitry with performance specs. as for standard types.

MOSFET Ultra-Fi, with heatsinks										Without heatsinks				
MODEL NUMBER	OUTPUT POWER Watts rms	DISTORTION			SUPPLY VOLTAGE TYP/MAX	SIZE mm	WT gms	PRICE	VAT	MODEL NUMBER	SIZE in mm	WT gms	PRICE	VAT
		T.H.D. Typ at 1kHz	I.M.D. 60Hz/7kHz 4:1											
MOS120	60w/4-8Ω	<0.005%	<0.006%	±45±50	120x78x40	420	£25.88	£3.88	MOS120P	120x26x40	215	£23.32	£3.50	
MOS200	120w/4-8Ω	<0.005%	<0.006%	±55±60	120x78x80	850	£33.46	£5.02	MOS200P	120x26x80	420	£28.53	£4.28	
MOS400	240w/4Ω	<0.005%	<0.006%	±55±60	120x78x100	1025	£45.39	£6.81	MOS400P	120x26x100	525	£38.91	£5.84	

Protection: Able to cope with complex loads, without the need for very special protection circuitry (fuses will suffice).  
Ultra-fi specifications:  
Slew rate: 20V/μs Rise time: 3μs S/N ratio: 100db Frequency response (-3dB): 15Hz - 100kHz  
Input sensitivity: 500mV rms Input impedance: 100kΩ Damping factor: (8Ω/100Hz)>400

POWER SUPPLY UNITS			
MODEL NO.	FOR USE WITH	PRICE	VAT
PSU30	± 15V combinations of HY6/66 series to a maximum of 100mA or one HY7 The following will also drive the HY6/66 series except HY67 which requires the PSU30.	£4.50	£0.68
PSU36	1 or 2 HY30	£8.10	£1.22
PSU50	1 or 2 HY60	£10.94	£1.64
PSU60	1 x HY120/HY120P/HD120/HD120P	£13.04	£1.96
PSU65	1 x MOS120/1 x MOS120P	£13.32	£2.00
PSU70	1 or 2 HY120/HY120P/HD120/HD120P	£15.92	£2.39
PSU75	1 or 2 MOS120/MOS120P	£16.20	£2.43
PSU90	1 x HY200/HY200P/HD200/HD200P	£16.20	£2.43
PSU95	1 x MOS200/MOS200P	£16.32	£2.45
PSU180	2 x HY200/HY200P/HD200/HD200P or 1 x HY400/1 x HY400P/HD400/HD400P	£21.34	£3.20
PSU185	1 or 2 MOS200/MOS200P/1 x MOS400/1 x MOS400P	£21.46	£3.22


All models except PSU30 and PSU36 incorporate our own toroidal transformers.

## FP480 BRIDGING UNIT FOR DOUBLING POWER

Designed specially by I.L.P. for use with any two power amplifiers of the same type to double the power output obtained and will function with any I.L.P. power supply. In totally sealed case, size 45 x 50 x 20mm, with edge connector. It thus becomes possible to obtain 480 watts rms (single channel) into 8Ω. Contributory distortion less than 0.005%.  
Price: £4.79 + 72p. V.A.T.

## Which modules?

In launching eighteen different units all within amazingly compact cases to help make complete audio systems using I.L.P. power amplifiers, we bring the most exciting, the most versatile modular assembly scheme ever for constructors of all ages and experience. Study the list - see how these modules will combine to almost any audio project you fancy - and remember all I.L.P. modules are compatible with each other, they connect easily. Modules HY6 to HY13 measure 45 x 20 x 40mm. HY66 to HY77 measure 90 x 20 x 40mm. They are so reliable that all I.L.P. modules carry a 5 year no quibble guarantee.

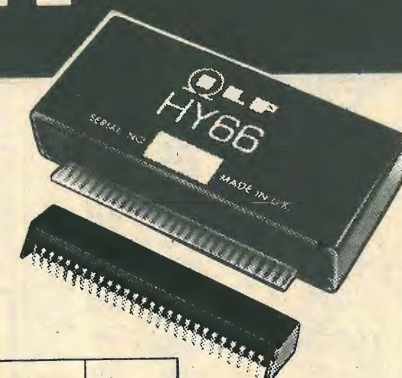

MODEL NO.	MODULE	DESCRIPTION/FACILITIES	CURRENT REQUIRED	PRICE	VAT
HY6	MONO PRE AMP	Mic/Mag. Cartridge/Tuner/Tape/Aux + Volume/Bass/Treble	10mA	£6.44	£0.97
HY7	MONO MIXER	To mix eight signals into one	10mA	£5.15	£0.77
HY8	STEREO MIXER	Two channels, each mixing five signals into one	10mA	£6.25	£0.94
HY9	STEREO PRE AMP	Two channels mag. Cartridge/Mic + Volume	10mA	£6.70	£1.01
HY11	MONO MIXER	To mix five signals into one + Bass/Treble controls	10mA	£7.05	£1.06
*HY12	MONO PRE AMP	To mix four signals into one + Bass/Mid-range/Treble	10mA	£6.70	£1.01
*HY13	MONO VU METER	Programmable gain/LED overload driver	10mA	£5.95	£0.89
HY66	STEREO PRE AMP	Mic/Mag. Cartridge/Tape/Tuner/Aux + Volume/Bass/Treble/Balance	20mA	£12.19	£1.83
HY67	STEREO HEADPHONE	Will drive headphones in the range of 4Ω - 2KΩ	80mA	£12.35	£1.85
HY68	STEREO MIXER	Two channels, each mixing ten signals into one	20mA	£7.95	£1.19
HY69	MONO PRE AMP	Two input channels of mag. Cartridge/Mic + Mixing/Volume/Treble/Bass	20mA	£10.45	£1.57
HY71	DUAL STEREO PRE AMP	Four channels of mag. Cartridge/Mic + Volume	20mA	£10.75	£1.61
*HY72	VOICE OPERATED STEREO FADER	Depth/Delay	20mA	£13.10	£1.97
*HY73	GUITAR PRE AMP	Two Guitar (Bass/Lead) and Mic + separate Volume/Bass/Treble + Mix	20mA	£12.25	£1.84
†HY74	STEREO MIXER	Two channels, each mixing five signals into one + Treble/Bass	20mA	£11.45	£1.72
†HY75	STEREO PRE AMP	Two channels, each mixing four signals into one + Bass/Mid-range/Treble	20mA	£10.75	£1.61
†HY76	STEREO SWITCH MATRIX	Two channels, each switching one of four signals into one	20mA	To be announced	
†HY77	STEREO VU METER DRIVER	Programmable gain/LED overload driver	20mA	£9.25	£1.39

The modules are encapsulated and include latest design high quality clip-on edge connectors.

For easy mounting we recommend B6 Mounting board for modules HY6 - HY13 78p + 12p. V.A.T.  
B66 Mounting board for HY66 - HY77 99p + 13p. V.A.T.

All I.L.P. modules include full connection data.

I.L.P. Products are of British Design and Manufacture.

\* Ready August - may be ordered now  
† Ready September - may be ordered now

All the above modules operate from ±15V minimum to ±30V maximum higher voltages being accommodated by use of dropper resistors. HY67 can only be used with the PSU 30 power supply unit.

## TO ORDER USING OUR FREEPOST FACILITY

Fill in the coupon as shown, or write details on a separate sheet of paper, quoting the name and date of this journal. By sending your order to our address as shown at the bottom of the page opposite, with FREEPOST clearly shown on the envelope, you need not stamp it. We pay postage for you. Cheques and money orders must be crossed and made payable to I.L.P. Electronics Ltd. If sending cash, it must be by registered post. To pay C.O.D. please add £1 to TOTAL value of order. When ordering, U.K. customers must include the appropriate V.A.T. as shown.

PAYMENT MAY BE MADE BY ACCESS OR BARCLAYCARD IF REQUIRED.

WW - 030 FOR FURTHER DETAILS

## ALL WITH I.L.P.'S 5 YEAR NO QUIBBLE GUARANTEE

To: I.L.P. ELECTRONICS LTD. ROPER CLOSE CANTERBURY CT2 7EP

Please supply ..... Total purchase price £ .....

I enclose Cheque  Postal Orders  International Money Order

Please debit my Access/Barclaycard Account No. ....


NAME .....

ADDRESS .....

Signature .....

WW 5/10

ALL U.K. ORDERS DESPATCHED POST FREE

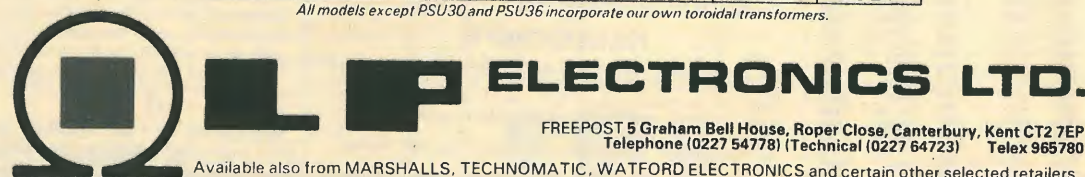

Available also from MARSHALLS, TECHNOMATIC, WATFORD ELECTRONICS and certain other selected retailers.

**GOODS BY MAIL ORDER DESPATCHED WITHIN 7 DAYS**

**OF RECEIVING YOUR ORDER**

# Samson's

(ELECTRONICS) LTD.  
9 & 10 CHAPEL ST., LONDON, NW1  
01-262 5125  
ADJACENT TO EDGWARE ROAD MET. LINE STATION

PLEASE ADD 15% TO ALL ORDERS INC. CARF.  
CURRENT RANGE OF NEW LT. TRANSFORMERS  
OPEN TYPE TAG CONNECTIONS  
ALL PRIMARIES 220-240V

Type	Sec Taps	Amps	Price	Carr
1	24-30-40-48-60v	11	£36.50	£2.00
2	24-30-40-48-60v	10	£31.50	£2.00
3	24-30-40-48-60v	8	£27.50	£1.75
4	24-30-40-48-60v	5	£18.75	£1.75
5	24-30-40-48-60v	3	£11.50	£1.25
6	24-30-40-48-60v	2	£7.50	£1.25
6-8-10-12-16-18-20-24-36-40-48-60v CAN BE OBTAINED FROM THE ABOVE RANGE				
7	19-25-33-40-50v	10	£27.50	£2.00
8	19-25-33-40-50v	6	£19.50	£1.75
9	19-25-33-40-50v	3	£9.25	£1.25
10	19-25-33-40-50v	2	£7.75	£1.25
6-7-8-10-13-15-17-20-25-30-40-50v OR 25-0-25V OR 20-0-20V CAN BE OBTAINED FROM THE ABOVE RANGE				
11	12-15-20-25-30v	10	£18.50	£1.75
12	12-15-20-25-30v	5	£10.50	£1.50
13	12-15-20-25-30v	3	£6.25	£1.25
3-4-5-6-8-9-10-12-15-18-20-24-30v OR 12-0-12V OR 15-0-15V CAN BE OBTAINED FROM THE ABOVE RANGE				
14	12-24v	12v 60A, 24v 30A	£38.50	£3.50
15	12-24v	12v 30A, 24v 15A	£18.50	£2.00
16	12-24v	12v 20A, 24v 10A	£18.25	£2.00
17	12-24v	12v 10A, 24v 5A	£8.75	£1.50
18	12-24v	12v 4A, 24v 2A	£4.25	£1.25


**HEAVY DUTY TRANSFORMERS**  
Type OT28EL 100 watts, 3.75V, 7.5V, 1.75K CT, 4 EL34 3.25V, 15V, 3.5K CT, rated 2x125mVA dc max £8.95, P&P £1.

**AUTO STEPDOWN TRANSFORMERS FOR AMERICAN EQUIPMENT**  
240/110 Volts. 80-2250 watts. Regular stock line. Types 80-1500 watts are fully shrouded. Fitted with American two or three pin socket outlets and 3 core 240V mains lead. Types 1750 and 2250 watts are steel cased with two American socket outlets. Neon indicator, three core mains lead and carrying handle. Send SAE for price list and further details. American sockets, plugs, adapters also available.

**GARDNERS UNIVERSAL LT TRANSFORMERS**  
Open frame top panel connections. PRI 120-240v secs 1v twice, 3v twice, 9v twice, separate windings, all at 6.4 amps. Conservatively rated. The following voltages can be obtained: 1-13v, in steps of one volt each and 1-0-1v-13-0-13v in one volt steps, and 1-13v 12.8V P&P £2.

## POWER UNITS

Now available with 3 OUTPUTS



Type 250VRU/30/25

- OUTPUT 1: 0-30v, 25A DC
- OUTPUT 2: 0-70v, 10A AC
- OUTPUT 3: 0-250v, 4A AC

ALL Continuously Variable

## Valradio

VALRADIO LIMITED, BROWLES LANE, FELTHAM MIDDLESEX TW13 7EN Telephone: 01-890 4242/4837

WW - 016 FOR FURTHER DETAILS

**LATEST PURCHASE. COMPUTER GRADE T TRANSFORMERS.** Conservatively rated. All Primaries 220-240V. No. 1 Secs. 27V 10A 9V 3A, 15V 2A x 2. Separate windings. £8.50, P&P £2.

No. 2 sec. tapped 26-31-36V, 11.2A £12. P&P £2.

No. 3 sec. 36V 6A £6.50, P&P £1.50.

No. 4 sec. 43V 3A £4.75, P&P £1.50.

No. 5 sec. 24V 2A £2.75, P&P £1.25.

No. 6 sec. 27.5-0-27.5V 1.2A and 7-0-7V 0.75A £3.50, P&P £1.25.

No. 7 17V 1A £2. P&P 75p.

No. 8 13V 3A and 15V 1A £3.50, P&P £1.25.

No. 9 18V 2A £2.50, P&P £1.

No. 10 sec. 29-28-27-0-27-28-29V 350 MVA "C" Core £3. P&P £1.

No. 11 sec. 10-7-0-7-10V 0.6A and 29-21-0-21-29V 0.37A £3. P&P £1.

No. 12. 27V 1A 22V 1A 10V 1A 10V 1A, 4 separate windings "C" core type. £4.95, P&P £1.50.

No. 13. 65V 1A and 18-24V 1/2A £3.95, P&P £1.50.

No. 14. Tapped 12-15-27V 1A £2. P&P 75p.

No. 15. 6.3V 500MVA/6.3V 330MVA/6.3V 20MVA/8V 500MVA/50V 4A £2. P&P £1.

No. 16. Tapped 14-15-16V 2A £3. P&P £1.

No. 17. Tapped 36-37-38-39-41-42-43V 1A "C" core £2.75, P&P £1.

**CLAUDE LYONS AUTOMATIC VOLTAGE STABILISER**  
Input 187-253V, Output 220V 51.7 Amps. Built-in fuse. Size 22 x 13 x 12ins. Brand new, fraction of maker's price. £150. Ex-Warehouse.

**WODEN 'C' CORE LT TRANSFORMERS**  
Pri 220-240V sec. tapped 8.75-10V 8A and 6.5V 3A and 5.2V 6A conservatively rated. £5.75, P&P £1.50.

**PARMEKO POTTED TRANSFORMERS**  
Pri 220-240V sec. 6.3V 3A three times and 5V 3A £2.75, P&P £1.50.

**PARMEKO HIGH VOLTAGE TRANSFORMERS**  
Pri. 240v, sec. 10,000v 2 MVA cont. rating. Completely enclosed in steel case 6 x 4 x 4in. £6. P&P £2 plus VAT £1.20. Total £9.20. Parmeko High Voltage Transformers. Pri. 220-240v, sec. 1,865v 60 MVA and 500v 31 MVA. 4.2kV pk. wkg. £5.75. P&P £2 plus VAT £1.17. Total £8.92.

**PARMEKO LT TRANSFORMERS.** Pri. 110-220-240V Sec. 24v 2amps conservatively rated built in steel case. Size 5 1/4 x 4 x 3 3/4ins. with on/off switch and input and output fuses. £3.95, P&P £1.50.

**HEAVY DUTY C CORE LT TRANSFORMERS**  
Pri 220-240V sec. 18V 27A, 40V 10A, 40V 4A, 25V 4A, 52V 1A. All separate windings. £27.50, Carr. £5.

**HEAVY DUTY ISOLATION TRANSFORMERS**  
240-240V ex-computer equipment. Large selection available 10-15 amps. Fraction of maker price. Telephone for further details.

**HEAVY DUTY LT C CORE TRANSFORMERS**  
PRI 110-220-240V sec. 12V 40A £22.50, Carr. £4. PRI 110-220-240V secs 14V 3V 1/2-1V. Separate windings 40A each, 1.4-15-15-17-18-18 1/2-19-19 1/2V at 40A £25. P&P 25p. 2 CO 7 Amp Contact 75p. P&P 25p. 1 CO 7-0-7V 10A size 7 x 7 x 7ins. top panel connections £29.50, Carr. £5.

**PARMEKO HT CHOKES**  
Potted types 15H 250 MVA £4.50, P&P £2. 10H 180 MVA £3.75, P&P £2. 10H 120 MVA £3, P&P £1.50. 50H 50 MVA £1.50, P&P £1. 15H 75 MVA £1.50, P&P £1. 50H 25 MVA £1.50, P&P £1. Swinging type, 5H 40 MVA-4H 250 MVA £3.75, P&P £1.50. C-Core type 20H 180 MVA £3.75, P&P £1.50. C-Core type 25H 60 MVA £2, P&P £1. 25H 25 MVA £1.50. 180H 24 MVA £4, P&P £2.

**HIGH CAPACITY ELECTROLYTICS**  
10,000 MFD 100V DC WKG £4. P&P 50p. 15,000 MFD 50V DC WKG £3. P&P 50p. 50,000 MFD 25V DC WKG £2. P&P 50p.

**HEATSINKS**  
Size 9 1/2 x 4 3/4 x 1ins. with 3 ZN3055 7 Welwyn Resistors £2. P&P 50p.

**HIGH GRADE TRICKLE CHARGERS**  
Input 240V AC. Output 12V DC 2 Amps. With mains lead. Red and black battery leads with attached clips. Completely fused. Housed in wall mounting. steel case size 6 x 4 3/4 x 4in. £4.50. PP £1.50 plus VAT. Total £6.90.

**WOODEN HIGH POWERED AMP TRANSFORMERS**  
Pro. 240V sec. tapped 30-0-30V, 35-0-35V, 55-0-55V 10 Amps. Open frame type. Top panel terminal connections with fitted fuses. £29 inc. VAT and carr.

**KEYBOARDS**  
ASCII Coded Mini Keyboard, alphanumeric, upper case only. Size 9" x 6.5" circuit board. Thickness, touch sensitive keys. A must for anyone building or modifying home computers. Very good value. £16 + carr 50p + VAT. Supplied with diagram.

**MONITORS**  
14" Monochrome Monitors, suitable for use with home computers, video input. Bargain price £29 + carr. £5. Also Monitor Chassis complete with tube. £25 + VAT. Callers only.

**AC WKG BLOCK CAPACITORS BY FAMOUS MANUFACTURERS**

MFD	AC Volts wkg.	Price
0.25	1500	£0.75
0.75	440	£0.75
1.75	370	£1.00
2.7 + 0.1	700	£1.00
4	440	£1.00
3	250	£1.25
4	360	£2.00
7.5	330	£2.00
15	330	£3.00

P&P up to 5 MFD 25p  
2.7-15 MFD 50p

**AC 240V BLOWERS**  
Ex-computer equipment, perfect condition, robustly housed in metal frame, overall size 11x7x1ins. In outlet size 4x3ins. Motor spec. 1300 rpm cont. rated, start, cap. inc. with motor, quiet running £4.95 carr. £2.

**PARMEKO OUTPUT TRANSFORMERS**  
10 watts, Pri 8000V ct. Sec. 4-8-16V for 2 EL84 valves. Atlantic output series £4.95, P&P £1.50. Farnell multi-tapped On Transformers, type MRT/3 7 watts max. DC60 MVA/2 3/3 7.5V 15V. Data sheet supplied £2.25, P&P 75p.

WW - 065 FOR FURTHER DETAILS

## cavern micro modules

Designed for Z80 based systems, these modules are suitable for Microcomputer expansion and the development of Micro systems.

The modules are based on a 55-way bus, this being a compromise between flexibility and economy. Terminations are wire-wrap pins which can also be soldered or plugged into sockets.

- First in the range are:
- 80-006 16K x 8 bit dynamic RAM ..... £13.60 (supplied without 4116 chips)
  - 80-013 16K x 8 bit dynamic RAM ..... £27.80
  - 80-020 RAM driver ..... £10.20
  - 80-037 RAM driver (with MUX and CAS) ..... £11.60
- V.A.T. extra

Each RAM driver will drive up to four RAM modules to give 16K-64K of memory.

More will follow shortly  
Good quantity discounts available. Dealer enquiries welcome. Please send for data sheets.

## CAVERN ELECTRONICS

94 Stratford Road, Wolverton, Milton Keynes MK12 5LU Telephone: Milton Keynes (0908) 314925

WW - 037 FOR FURTHER DETAILS

## FOTOLAK

Enables YOU to produce perfect printed circuits in minutes!  
Method: Spray cleaned board with lacquer. When dry, place positive master of required circuit on now sensitized surface. Expose to daylight, develop and etch. Any number of exact copies can of course be made from one master. Widely used in industry for prototype work.

	Pre-coated 1/16" Fibre-glass board	204mm x 114mm	£1.50
FOTOLAK	204mm x 228mm	£3.00	
Developer	408mm x 228mm	£6.00	
Ferric Chloride	467mm x 305mm	£9.00	

Plain Copper-clad Fibre-glass. Single-sided Double-sided

Approx. 2.00mm thick ft. sq. £2.25  
Approx. 1.00mm thick ft. sq. £2.00

Clear Acetate Sheet for making master, 260mm x 260mm 15p

Postage and packing 60p per order. VAT 15% on total  
G. F. MILLWARD ELECTRONIC COMPONENTS LIMITED  
P.O. Box 19, Praa Sands, Penzance, Cornwall  
Telephone GERMOE (073-676) 2329

WW - 016 FOR FURTHER DETAILS

# LANGREX SUPPLIES LTD

Climax House, Fallsbrook Rd., Streatham, London SW16 6ED  
RST Tel: 01-677 2424 Telex: 946708 RST

**SEMICONDUCTORS**

AA119	0.12	AS215	1.38	BC172	0.13	BD131	0.51	BF257	0.31	CRS360	1.04	OAZ201	1.73	OC203	3.45	ZTX502	0.21	2N1309	1.38	2N1371	1.61
AA120	0.12	AS216	1.27	BC173	0.13	BD132	0.55	BF258	0.31	GEX66	1.73	OC206	1.76	OC207	3.45	ZTX504	0.21	2N1313	0.75	2N1372	1.94
AA121	0.12	AS217	1.15	BC177	0.32	BD133	0.46	BF259	0.32	GJM1	1.73	OC210	2.88	OC211	3.16	ZTX505	0.28	2N1314	0.75	2N1373	2.07
AA122	0.17	AS220	2.64	BC178	0.16	BD137	0.46	BF336	0.39	GJM3	1.73	OC212	2.88	OC213	2.88	ZTX510	0.28	2N1315	0.75	2N1374	0.35
AA123	0.17	AS221	2.88	BC179	0.32	BD139	0.55	BF337	0.38	GM0378A	2.02	OC214	2.88	OC215	2.88	ZTX511	0.28	2N1316	0.75	2N1375	0.40
AA124	0.17	AU113	2.88	BC182	0.13	BD140	0.58	BF338	0.41	K5100A	0.52	OC216	2.88	OC217	2.88	ZTX512	0.28	2N1317	0.75	2N1376	0.69
AC107	0.63	AU110	3.45	BC183	0.13	BD141	2.30	BF339	0.41	MJE370	0.69	OC218	2.88	OC219	2.88	ZTX513	0.28	2N1318	0.75	2N1377	0.35
AC125	0.29	AU110	2.88	BC184	0.13	BD181	1.38	BF340	0.41	MJE371	0.82	OC220	2.88	OC221	2.88	ZTX514	0.28	2N1319	0.75	2N1378	0.40
AC126	0.29	BA145	0.15	BC212	0.13	BD182	1.36	BF341	0.41	MJE372	0.82	OC222	2.88	OC223	2.88	ZTX515	0.28	2N1320	0.75	2N1379	0.40
AC127	0.29	BA148	0.17	BC213	0.13	BD183	0.62	BF342	0.41	MJE373	0.82	OC224	2.88	OC225	2.88	ZTX516	0.28	2N1321	0.75	2N1380	0.40
AC176	0.35	BA157	0.07	BC214	0.13	BD184	0.58	BF343	0.41	MJE374	0.82	OC226	2.88	OC227	2.88	ZTX517	0.28	2N1322	0.75	2N1381	0.40
AC178	0.35	BA158	0.12	BC217	0.13	BD185	1.38	BF344	0.41	MJE375	0.82	OC228	2.88	OC229	2.88	ZTX518	0.28	2N1323	0.75	2N1382	0.40
AC182	0.29	BA159	0.15	BC218	0.13	BD186	1.38	BF345	0.41	MJE376	0.82	OC230	2.88	OC231	2.88	ZTX519	0.28	2N1324	0.75	2N1383	0.40
AC183	0.29	BA160	0.15	BC219	0.13	BD187	1.38	BF346	0.41	MJE377	0.82	OC232	2.88	OC233	2.88	ZTX520	0.28	2N1325	0.75	2N1384	0.40
AC184	0.29	BA161	0.15	BC220	0.13	BD188	1.38	BF347	0.41	MJE378	0.82	OC234	2.88	OC235	2.88	ZTX521	0.28	2N1326	0.75	2N1385	0.40
AC185	0.29	BA162	0.15	BC221	0.13	BD189	1.38	BF348	0.41	MJE379	0.82	OC236	2.88	OC237	2.88	ZTX522	0.28	2N1327	0.75	2N1386	0.40
AC186	0.29	BA163	0.15	BC222	0.13	BD190	1.38	BF349	0.41	MJE380	0.82	OC238	2.88	OC239	2.88	ZTX523	0.28	2N1328	0.75	2N1387	0.40
AC187	0.32	BA164	0.15	BC223	0.13	BD191	1.38	BF350	0.41	MJE381	0.82	OC240	2.88	OC241	2.88	ZTX524	0.28	2N1329	0.75	2N1388	0.40
AC188	0.32	BA165	0.12	BC224	0.13	BD192	1.38	BF351	0.41	MJE382	0.82	OC242	2.88	OC243	2.88	ZTX525	0.28	2N1330	0.75	2N1389	0.40
AC189	0.32	BA166	0.12	BC225	0.13	BD193	1.38	BF352	0.41	MJE383	0.82	OC244	2.88	OC245	2.88	ZTX526	0.28	2N1331	0.75	2N1390	0.40
AC190	0.32	BA167	0.12	BC226	0.13	BD194	1.38	BF353	0.41	MJE384	0.82	OC246	2.88	OC247	2.88	ZTX527	0.28	2N1332	0.75	2N1391	0.40
AC191	0.32	BA168	0.12	BC227	0.13	BD195	1.38	BF354	0.41	MJE385	0.82	OC248	2.88	OC249	2.88	ZTX528	0.28	2N1333	0.75	2N1392	0.40
AC192	0.32	BA169	0.12	BC228	0.13	BD196	1.38	BF355	0.41	MJE386	0.82	OC250	2.88	OC251	2.88	ZTX529	0.28	2N1334	0.75	2N1393	0.40
AC193	0.32	BA170	0.12	BC229	0.13	BD197	1.38	BF356	0.41	MJE387	0.82	OC252	2.88	OC253	2.88	ZTX530	0.28	2N1335	0.75	2N1394	0.40
AC194	0.32	BA171	0.12	BC230	0.13	BD198	1.38	BF357	0.41	MJE388	0.82	OC254	2.88	OC255	2.88	ZTX531	0.28	2N1336	0.75	2N1395	0.40
AC195	0.32	BA172	0.12	BC231	0.13	BD199	1.38	BF358	0.41	MJE389	0.82	OC256	2.88								

VALVES		Minimum Order £1		VALVES VAT IS INCLUDED							
A1065	1.40	EL509	2.70	QV06/40A	6ALS	0.60	11E2	18.50	6064	2.30	
A2293	8.80	EL802	1.70	16.10	GALSW	0.85	12A6	0.70	6065	2.30	
A2900	9.20	EL821	8.20	QV03-12	4.20	GAM5	4.20	12AT6	0.70	6067	2.30
AR6	0.75	EL822	9.95	SC1/400	4.50	GAM6	1.50	12AT7	0.85	6080	5.30
AR3	0.70	EM31	1.60	SC1/500	4.50	GAN8A	2.50	12AU7	0.80	6146	4.95
ATP4	0.60	EM80	0.85	SC1	1.80	GAN8A	3.40	12AV6	0.95	6146B	5.20
B12H	3.90	EM81	0.85	TT21	16.50	GAQ5	1.00	12BA6	0.90	6380	2.85
CY31	1.40	EM84	0.85	U25	1.15	GAQ5W	1.80	12BE6	1.25	6380	2.85
DAF96	0.70	EM87	1.30	U26	1.15	GAQ6	1.15	12BE6E	1.25	6970	14.00
DE722	26.95	EY51	0.95	U27	1.15	GAQ6	1.15	12BH7	1.10	8552	8.20
DF96	0.70	EY81	0.65	U191	1.15	GAU	0.90	12C8	0.65	8973	3.30
DH76	0.75	EY86/87	0.60	U281	0.70	GAV6	0.85	12E1	1.25	7199	5.85
DL92	0.60	EY88	0.85	U301	0.65	6AX4GT	1.30	12J5GT	0.55	35P1	11.00
DY86/87	0.65	EZ80	0.70	U600	11.50	6AX5GT	1.30	12K7GT	0.70	5F7	18.00
DY602	0.70	EZ81	0.70	U801	0.90	6BA6	3.80	12K8GT	0.80	4EP1	32.00
E56L	14.90	GM4	5.90	UBC41	1.20	6BE6	0.55	12O7GT	0.80	88J	14.00
E88CC	1.60	GY501	1.30	UABC80	0.75	6BG6G	1.60	12S7	0.65	88J	14.00
E88CC/01	3.10	GZ32	1.05	UAF42	1.20	6BJ6	1.30	12SH7	0.65	CV1526	16.00
E92CC	1.20	GZ34	2.75	UBF80	0.70	6BQ7A	0.85	12SJ7	0.85	DG7-32	34.80
E180CC	2.80	GZ37	3.95	UBL21	1.75	6BW6	6.20	12SQ7	1.45	DG7-36	36.00
E180F	6.30	K166	6.30	UCC84	0.85	6BW7	6.90	12S07GT	1.25	DPM9-11	38.40
E180CC	4.95	9.20*	UCC85	0.70	6C4	0.50	13D3	0.70	D13-33GM	41.80	
EA76	2.25	KT88	9.95	UCF80	1.30	6C6	0.55	13D6	0.90	* spec. Q	
EABC80	0.60	13.80*	UCF80	1.30	6C6	0.55	13D6	0.90	PLUMBICON		
EB91	1.15	MH4	2.50	UCH81	0.75	6CL6	1.70	13D6	0.85	P800 3LF	
EBL3	0.60	ML6	2.50	UCL82	0.95	6CX8	3.80	19A05	1.15	P800 IR	
EB93	0.60	MX10/01	21.90	UF41	1.35	6CY5	1.15	19G3	11.50	P800 IR	
EBF80	0.60	N78	9.90	UF80	0.95	6D6	0.70	19G6	8.50	P800 IR	
EBF83	0.60	OA2	0.70	UF80	0.95	6D6	0.70	19G6	8.50	P800 IR	
EBF89	0.60	OB2	0.80	UL41	2.30	6F6	1.60	19H5	39.55	QX1020R	
EC52	0.65	PABC80	0.60	UL84	0.95	6F6GB	1.10	20F2	0.80	QX1020B	
EC31	3.40	PC85	0.75	UM80	0.90	6F7	2.80	20E1	1.30	SPECIAL V.	
EC92	0.85	PC86	0.95	UM84	0.70	6F8G	0.85	20P1	0.65	4CX 1000A	
ECC81	0.60	PC88	0.95	UY82	0.70	6F12	1.50	20P1	0.65	4CX 1000A	
ECC82	0.60	PC97	1.50	UY85	0.85	6F14	1.15	20P4	0.75	4CX 1000A	
ECC83	0.65	PC900	1.15	VR105/30	1.25	6F15	1.30	20P5	1.35	BM 25L	
ECC84	0.60	PC984	0.50	VR150/30	1.25	6F17	1.15	25L6GT	0.95	BW 153	
ECC85	0.60	PCC89	0.85	X66	1.35	6F23	0.75	25Z4G	0.75	DM 25LB	
ECC86	1.70	PCC189	1.05	X66	1.35	6F23	0.75	25Z4G	0.75	DM 25LB	
ECC88	0.80	PCF80	0.80	X61M	1.70	6F33	10.50	30C15	0.50	YL 1420	
ECC189	0.95	PCF82	0.70	XR1-6400A	6F38	4.20	30C17	0.50	YL 1430		
ECC804	0.90	PCF84	0.75	6F38	4.20	30C18	2.45	30C18	2.45	YL 1440	
ECF80	0.85	PCF86	1.50	Z759	82.80	6G8A	0.90	30F5	1.15	GXU 6	
ECF82	0.65	PCF87	0.50	Z749	0.75	6H6	0.95	30F12	1.40	CV1597	
ECF801	1.05	PCF200	1.60	Z800U	3.45	6J4	1.35	30FL12	1.25	CV21116	
ECM24	2.25	PCF201	1.65	Z801U	3.75	6J4WA	2.00	30FL14	2.15	CV21116	
ECM35	1.70	PCF801	1.75	Z803U	16.00	6J5	2.30	30FL15	2.15	BR 179	
ECM42	1.20	PCF802	0.85	1A3	0.85	6J6	0.65	30P12	1.10	CV 6131	
ECM81	0.70	PCF805	2.45	1L4	0.50	6J6W	0.90	30PL13	1.25	TV4-500	
ECM84	0.80	PCF806	2.15	1R5	0.60	6J6C	2.95	35L6GT	1.40	BK485/5552A	
ECL82	0.75	PCF808	2.75	1S4	0.45	6J6S	2.95	35W4	0.80	MIL 5948/1754	
ECL83	1.40	PCH200	1.35	1S5	0.45	6K7	0.80	35Z4GT	0.80	IC	
ECL85	0.80	PCL81	0.75	1T4	0.45	6L6M	2.80	35Z4GT	0.80	SN5402N	0.28
ECL86	0.90	PCL82	0.95	1U4	0.80	6L6G	2.50	40K06	3.15	SN5410F	0.32
EF37A	2.15	PCL84	0.95	1X2B	1.40	6L6GC	2.10	50C5	1.15	SN5470F	0.48
EF39	1.90	PCL86	1.05	2D21	1.10	6L7C	1.25	50C6G	1.25	SN54196J	1.20
EF80	0.65	PD805/85	1.25	2K25	11.90	6L18	0.70	75C1	1.70	SN7407N	0.29
EF83	1.75	PD500/510	4.30	2X2	1.15	6LQ6	2.95	76	0.95	SN7408N	0.18
EF85	0.60	PFL200	1.10	3A4	0.70	6LD20	0.70	78	0.95	SN74453P	1.10
EF86	0.75	PL36	1.25	3A7	2.40	6K6A	2.70	80	1.70	SN74453P	1.10
EF89	1.05	PL81	0.85	3D6	0.50	607G	1.40	85A2	1.40	SN7453N	0.18
EF91	2.50	PL82	0.70	3D22	23.00	6SA7	1.00	255*	1.90	SN7473N	0.38
EF92	1.90	PL83	0.80	3E29	19.00	6SG7	1.15	723A/B	11.90	SN7474N	0.30
EF95	0.65	PL84	0.80	3S4	18.25	6SK7	1.80	9V6G	1.35	SN7485N	0.95
EF96	0.60	PL504	1.45	3S4	0.80	6SJ7	1.05	807	1.25	SN7485N	1.10
EF183	0.80	PL508	1.95	5B/254M	16.90	6SL7GT	0.95	813	14.80	SN7491AN	0.32
EF184	4.95	PL509	2.90	5B/255M	14.50	6SN7GT	0.80	832A	8.90	SN74123N	0.42
EF184	0.75	PL519	3.20	5B/258M	12.50	6SR7	1.10	866A	3.80	SN74123N	0.38
EF200	1.85	PL802	3.20	5C22	29.90	6SQ7	0.95	866E	6.25	SN15836N	0.26
EH90	0.85	PY33	0.70	5R4GY	1.80	6V6G	0.95	954	0.60	SN76013N	1.80
EL32	1.10	PY80	0.70	5U4G	0.75	6V6GT	1.50	931A	13.80	SN76033N	1.60
EL34	1.80	PY81/800	0.85	5V4G	0.75	6X4	0.75	955	0.60	SN76033N	1.95
EL37	4.40	PY83	0.80	5Y3GT	0.80	6X4WA	2.10	966	0.60	MC6800P	5.90
EL81	2.40	PY88	0.85	5Z4G	0.75	6Y6G	0.90	1629	1.85	MC68800P	6.40
EL82	0.70	PY500	1.70	5Z4GT	1.05	6Z4	0.70	1629	1.85	B1702AL	2.20
EL84	0.80	PY809	6.45	6/30L2	0.90	7B7	1.75	2051	2.90	MM6300-1	3.30
EL86	0.95	PY801	0.80	6AB7	0.70	7Y4	1.25	5763	4.20		
EL90	1.00	QV03/10	2.85	6AC7	1.15	9D2	0.70	5842	7.50	MCM6810AP	3.80
EL91	4.20	QV03-20A	6AC5	6AG5	0.60	9D6	0.85	5839	6.90	E340-1J	3.60
EL95	0.80	QV03-25A	14.40	6AH6	1.15	10C2	0.70	6057	2.20	MIC945-5D	0.28
EL99	1.70	6AK5	0.65	10F18	0.70	6057	2.20	6060	1.95	MIC936-5D	0.22
EL803	5.90	21.20	6AK8	0.60	10P13	1.50	6060	1.95			

**VALVES AND TRANSISTORS**  
Telephone enquiries for valves, transistors, etc. retail 749 3934, trade and export 743 0899.

Geiger Muller Tubes GM4, MX120/01 and others.  
**PRICES MAY VARY**

TEST SET FT2 FOR TESTING Transceivers A40, A41, A42 and CPC26.  
HARNESS "A" & "B" CONTROL UNITS "A" "R" "J1" "J2". Microphones No 5, 6, 7 connectors, frames, carrier sets, etc.  
DRUM CABLE continuous connection YC 00433.

**FIELD TELEPHONES TYPE "J".**  
Tropical, in metal cases.

**10-LINE MAGNETO SWITCHBOARD.** Can work with every type of magneto telephones.

POSTAGE: £1-£3 45p; £3-£5 55p; £5-£10 60p; £10-£15 75p; £15-£20 90p; over £20 free.

**COLOMOR (ELECTRONICS LTD.)**  
170 Goldhawk Rd., London W.12  
Tel. 01-743 0899 or 01-749 3934  
Open Monday to Friday 9 a.m.-5.30 p.m.

**MORE SPEC. FOR YOUR MONEY**

**TYPE 747 UNIVERSAL COUNTER TIMER**  
DC to 150MHz 8 DIGITS, 3 CHANNELS  
MEASURES —  
FREQUENCY Ch A and Ch C  
PERIOD Ch A  
TIME ± Ch A to ± Ch B  
PULSE WIDTH Ch A + or —  
COUNT Ch A (may be gated and reset by B & C)

**£175**  
AVERAGES 1 to 1000 events & 3.50 carriage, ins. etc.

**TYPE 745 COUNTER TIMER**  
DC to 32MHz 5 DIGITS  
MEASURES —  
FREQUENCY  
PERIOD  
TIME  
COUNT  
6 GATE TIMES/TIME UNITS  
**£116.38** & £3 carriage, ins. etc. 10 µS to 1S

**TYPE 746 AUTORANGING FREQUENCY METER** £84.88  
1Hz to 99.9KHz

**TYPE 615 OFF-AIR STANDARD** £97.13  
10MHz, 1MHz and 100KHz

OMB ELECTRONICS, RIVERSIDE, EYNSFORD, KENT DA4 0AE  
Tel. Farningham (0322) 863567

Prices, which are CWO and ex-VAT, are correct at the time of going to press and are subject to change without notice.

**FROM OMB ELECTRONICS**  
WW - 066 FOR FURTHER DETAILS

**TV TUBE REBUILDING**

Faircrest Engineering Ltd. manufacture a comprehensive range of equipment for processing all types of picture tubes, colour and mono. Standard or custom built units for established or new businesses. We export world-wide and have an excellent spares service backed by a strong technical team.

Full training courses are individually tailored to customers' requirements.

For full details of our service contact Neil Jupp

**FAIRCREST ENGINEERING LTD.**  
4 Union Road, Croydon, CR0 2XX  
01-684 1422/01-684 0246  
WW - 053 FOR FURTHER DETAILS

# THE EXHIBITION FOR THE ELECTRONICS ENTHUSIAST

COMPUTERS • AUDIO • RADIO • MUSIC • LOGIC • TEST GEAR • CB • GAMES • KITS

Wednesday 11th November 10 a.m.-6 p.m. Thursday 12th November 10 a.m.-8 p.m.  
Friday 13th November 10 a.m.-6 p.m. Saturday 14th November 10 a.m.-6 p.m.  
Sunday 15th November 10 a.m.-4 p.m.



COMPONENTS • DEMONSTRATIONS • SPECIAL OFFERS • MAGAZINES • BOOKS

Any one of the 17,000 people who thronged the RHS for the Breadboard exhibition last year will need no introduction to this year's premier show for the electronics enthusiast. They already know all about the demonstrations, bargain sales, bookstalls, games, kits, computers and music machines to be found at BREADBOARD 81. They could name you all the leading companies who were there to see — and to buy from, at fantastic prices.

Even those lucky 17,000 would be surprised to hear that this year we've improved BREADBOARD still further! More stands, more demonstrations and wider gangways to make it all easier to enjoy!

BREADBOARD 81 is the place to be from November 11th to 15th at the RHS Hall. Why not come and find out for yourself how much you missed last year? We can promise plenty to see and do at BREADBOARD 81. Close to Victoria Station and NCP car parking facilities.

Cost of entry will be £2.00 for adults and £1.00 for children under 14 yrs and O.A.P.s.  
ORGANISED BY MODMAGS LTD., 145 CHARING CROSS ROAD, LONDON WC2H 0EE.

ROYAL HORTICULTURAL SOCIETY'S  
NEW HALL, GREYCOAT STREET,  
WESTMINSTER, LONDON S.W.1.

To avoid queuing, advance tickets will be available from Advance Tickets BB '81, Modmags Ltd, 145 Charing Cross Road, London WC2H 0EE.

"Special Advance Booking Price"  
Adults £1.75 Children under 14 yrs and O.A.P.s 80p

Please send ..... tickets @ £1.75 ..... tickets @ 80p

To:.....

I enclose PO/cheque for £.....

Advance tickets MUST be ordered BEFORE 20th October 1981.

**Hitachi Oscilloscopes** the highest quality the most competitive prices **NEW!**

Hitachi Oscilloscopes combine the very highest levels of performance and specification with quality that is unmatched within the industry.

The comprehensive range starts with the very low cost 15MHz dual-trace V-152, and extends to the superb 100MHz quad-trace V-1050 with a specification that is amazing for its price.

Hitachi 'scopes carry a two-year warranty, are supplied complete with probes, and we hold them in stock for immediate delivery.

For full colour brochures giving detailed technical specifications and prices, ring 0480 63570

Reltech Instruments 46 High Street, Solihull, W. Midlands. B91 3TB.


WW - 073 FOR FURTHER DETAILS

# TEST INSTRUMENTS

## THANDAR

Digital Multimeters (LED):  
 PDM35 £34.50 DM235 £52.50  
 Digital Multimeters (LCD):  
 TM351 £99.00 TM352 £49.95  
 TM353 £75.00 TM354 £39.95

Pulse Gen: TG105 £85.00  
 Oscilloscope: SC110 £139.00  
 Pre-Scaler: TP600 £37.50  
 Function Gen: TG100 £79.00



Frequency meters:  
 PFM200 £49.80 TF040 £110.00  
 TF200 £145.00  
 P&P - £1.00

## SABTRONICS KITS

Digital Multimeters:  
 2015A (below) £82.00



Handheld Multimeters:  
 2035A £64.00 2037A £82.00  
 9 Digit Frequency Meter:  
 8610B £89.00  
 Function Generator (assembled):  
 5020A £86.00



P&P - £1.00

## SAFGAN DUAL TRACE SCOPES

DT-410 £169 DT-412 £175 DT-415 £188  
 Probe (X1-REF-X10) - £11.50. P&P £3.50 or parcel service £6.50 (+VAT)


Many more instruments available from all these ranges

ADD 15% VAT ON ALL PRICES  
 All prices correct at 1-8-81 E&OE  
 Cash with order or Credit Card  
 CATALOGUE AVAILABLE (30p)

## DAROM SUPPLIES

Open: Mon.-Fri. 9.00 a.m.-5.30 p.m.  
 Callers welcome  
 4 Sandy Lane, Stockton Heath  
 WARRINGTON, WA4 2AY, CHESHIRE  
 Telephone: (0925) 64764

## LEADER



next month

WW-039 FOR FURTHER DETAILS

# Happy Memories

Part Type	1 off	50-99	100 up
4116 200ns	.95	.85	.75
4116 250ns	.85	.75	.65
2114 200ns Low power	1.30	1.20	1.10
2114 450ns Low power	1.25	1.15	1.05
4118 250ns	3.45	2.95	2.75
6116 150ns CMOS	8.75	8.25	7.95
2708 450ns	2.40	2.25	2.15
2716 450ns 5 volt	2.65	2.40	2.20
2716 450ns three rail	7.40	7.00	6.75
2732 450ns Intel type	5.40	4.95	4.65
2532 450ns Texas type	5.40	4.95	4.65

Z80A-CPU £5.25 Z80A-P10 £4.75 Z80A-CTC £4.75

Low profile IC sockets: Pins 8 14 16 18 20 22 24 28 40  
 Pence 9 10 11 14 15 18 19 25 33

Soft-sectored floppy discs per 10 in plastic library case:  
 5 inch SSDD £17 5 inch DSDD £21  
 8 inch SSSD £21 8 inch SSDD £26.65  
 8 inch DSDD £31.75

74LS series TTL, large stocks at low prices with DIY discounts starting at a mix of just 25 pieces. Write or 'phone for list.

Please add 30p post & packing to orders under £15 and VAT to total  
 Access & Barclaycard welcome.  
 24-hr. service on (054 422) 618  
 Government & Educations orders welcome, £15 minimum  
 Trade accounts operated, 'phone or write for details  
 Prices are still tending to drop, 'phone for a quote before you buy

**HAPPY MEMORIES (WW)**  
**GLADESTRY, KINGTON**  
**HEREFORDSHIRE HR5 3NY**  
**Tel. (054 422) 618 or 628**

## TRANSISTORS

AC125	0.20	BC117	0.17	BC208	0.09	BC409	0.11	BD239	0.30	BF259	0.27	BU500	2.00	2N3053	0.28
AC126	0.20	BC119	0.18	BC209	0.09	BC410	0.11	BD240	0.32	BF271	0.24	BUY69A	1.75	2N3054	0.60
AC127	0.15	BC125	0.11	BC212	0.08	BC417	0.11	BD241A	0.30	BF273	0.12	C106D1	0.24	2N3055	0.45
AC128	0.18	BC126	0.11	BC212L	0.08	BC418	0.11	BD241C	0.30	BF308	0.30	OC28	1.00	2N3442	1.20
AC127K	0.20	BC140	0.19	BC212LB	0.08	BC427	0.11	BC433	0.50	BF337	0.27	R2008B	1.50	2N3553	2.20
AC128K	0.27	BC141	0.19	BC213	0.08	BC440	0.22	BC434	0.50	BF338	0.27	R2108B	1.50	2N3702	0.10
AC141	0.20	BC142	0.20	BC213L	0.08	BC441	0.22	BC435	0.50	BF355	0.37	R1038	1.00	2N3703	0.10
AC141K	0.27	BC143	0.20	BC213LB	0.08	BC442	0.22	BC436	0.50	BF380	0.30	R1039	1.50	2N3704	0.10
AC142	0.20	BC147	0.07	BC214	0.08	BC461	0.30	BC437	0.50	BF451	0.10	R2029	1.50	2N3705	0.10
AC142K	0.27	BC147A	0.07	BC214L	0.08	BC467	0.20	BC438	0.50	BF457	0.30	R2322	1.00	2N3706	0.10
AC151	0.20	BC147B	0.07	BC214LB	0.08	BC478	0.20	BC439	0.50	BF459	0.30	R2773	0.50	2N3707	0.10
AC153	0.20	BC147C	0.07	BC214L	0.08	BC537	0.09	BC537	0.09	BF459	0.30	TIP29	0.35	2N3708	0.10
AC176	0.20	BC148	0.07	BC237A	0.08	BC547	0.09	BC518	0.55	BF523	0.15	TIP29A	0.35	2N3711	0.10
AC176K	0.27	BC148A	0.07	BC237B	0.08	BC548	0.09	BC519	0.55	BF594	0.20	TIP29B	0.35	2N3713	3.00
AC187	0.20	BC148B	0.07	BC237C	0.08	BC548B	0.09	BC937	0.40	BF595	0.20	TIP29C	0.35	2N3819	0.20
AC188	0.20	BC148C	0.07	BC238	0.08	BC548C	0.09	BC945	0.40	BF596	0.20	TIP30	0.35	2N3866	0.60
AC187K	0.27	BC149	0.07	BC238A	0.08	BC549	0.07	BC950	0.40	BF640	0.22	TIP30A	0.35	2N3903	0.15
AC188K	0.27	BC149A	0.07	BC238B	0.08	BC549A	0.07	BDX32	1.20	BF691	1.20	TIP30B	0.35	2N3904	0.15
AD140	0.40	BC149B	0.07	BC238C	0.08	BC549B	0.07	BF115	0.20	BFX29	0.25	TIP30C	0.35	2N3905	0.18
AD141	0.60	BC149C	0.07	BC251A	0.09	BC549C	0.07	BF123	0.18	BFX37	0.20	TIP31A	0.35	2N3906	0.18
AD142	0.70	BC157	0.08	BC251B	0.09	BC550	0.07	BF123	0.18	BFX48	0.40	TIP31B	0.35	2N4037	0.60
AD143	0.70	BC158	0.08	BC252A	0.09	BC557	0.06	BF127	0.18	BFX84	0.24	TIP31C	0.35	2N4058	0.11
AD149	0.48	BC159	0.08	BC252B	0.09	BC558	0.07	BF137	0.30	BFX86	0.20	TIP32	0.40	2N4061	0.16
AD161	0.22	BC160	0.26	BC257	0.09	BC559	0.07	BF152	0.09	BFX87	0.22	TIP32B	0.40	2N4062	0.16
AD162	0.22	BC161	0.26	BC258	0.10	BCY56	0.25	BF157	0.30	BFX88	0.22	TIP32C	0.42	2N4125	0.20
AD161/162	45	BC168	0.09	BC260	0.15	BCY58	0.25	BF160	0.20	BFX89	0.38	TIP33B	0.55	2N4143	0.20
ACY39	0.30	BC169	0.09	BC261A	0.15	BCY70	0.15	BF167	0.20	BFY34	0.40	TIP34	0.80	2N4250	0.18
ACY40	0.20	BC170A	0.05	BC261B	0.16	BCY71	0.15	BF173	0.20	BFY50	0.20	TIP35	1.50	2N4400	0.10
ACY44	0.20	BC170B	0.05	BC262	0.14	BD115	0.24	BF177	0.26	BFY51	0.20	TIP36	1.00	2N4402	0.10
AF106	0.28	BC170C	0.05	BC263	0.14	BD124P	0.56	BF178	0.26	BFY52	0.20	TIP41C	0.40	2N4403	0.12
AF109	0.28	BC171	0.07	BC268	0.20	BD131	0.30	BF179	0.26	BFY56	0.40	TIP42C	0.40	2N4416	0.50
AF124	0.20	BC171A	0.07	BC300	0.28	BD132	0.30	BF180	0.20	BFY90	0.50	TIP47	0.60	2N4441	1.00
AF125	0.20	BC171B	0.07	BC301	0.28	BD133	0.37	BF181	0.20	BR100	0.19	TIP2955	0.80	2N4443	1.00
AF126	0.20	BC172	0.07	BC302	0.28	BD135	0.24	BF182	0.20	BR101	0.28	TIP3055	0.60	2N4900	1.50
AF127	0.20	BC172A	0.07	BC303	0.26	BD136	0.24	BF183	0.20	BRC4443	0.80	TIP2955	0.60	2N4922	1.50
AF139	0.30	BC172B	0.07	BC304	0.28	BD137	0.24	BF184	0.26	BRX39	0.30	TIP2955	0.60	2N5060	0.20
AF239	0.32	BC172C	0.07	BC307	0.08	BD138	0.24	BF185	0.26	BSX52	0.20	TIP2955	0.60	2N5088	0.20
AU106	1.90	BC173B	0.09	BC308	0.08	BD139	0.24	BF194	0.11	BSY84	0.20	TIP2955	0.60	2N5105	0.50
AU107	1.30	BC174	0.08	BC309	0.08	BD140	0.24	BF195	0.11	BSY95A	0.20	TIP2955	0.60	2N5195	0.40
AU110	1.40	BC177	0.15	BC313	0.20	BD150	0.40	BF196	0.08	BT106	1.00	TIP2955	0.60	2N5298	0.50
AU113	1.80	BC177B	0.15	BC315	0.20	BD159	0.40	BF197	0.09	BT119	1.00	TIP2955	0.60	2N5447	0.09
BC107	0.09	BC178	0.15	BC317	0.15	BD175	0.30	BF198	0.08	BT120	1.00	TIP2955	0.60	2N5449	0.09
BC107A	0.09	BC179	0.15	BC318	0.15	BD176	0.30	BF199	0.08	BT116	1.20	TIP2955	0.60	2N5458	0.30
BC107B	0.09	BC182	0.07	BC319	0.12	BD182	0.65	BF200	0.20	BU105	1.10	TIP2955	0.60	2N5485	0.34
BC108	0.09	BC182B	0.07	BC320	0.12	BD201	0.50	BF224	0.15	BU108	1.40	TIP2955	0.60	2N5486	0.30
BC108A	0.09	BC182L	0.07	BC322	0.12	BD202	0.50	BF240	0.12	BU124	1.00	TIP2955	0.60	2N5490	0.50
BC108B	0.09	BC182LB	0.09	BC323	2.00	BD203	0.50	BF241	0.12	BU126	0.90	TIP2955	0.60	2N5496	0.70
BC108C	0.09	BC183	0.08	BC327	0.09	BD204	0.50	BF243	0.26	BU134	0.30	TIP2955	0.60	2N5551	0.15
BC109	0.09	BC183L	0.08	BC328	0.09	BD223	0.40	BF244B	0.20	BU204	1.30	TIP2955	0.60	2N6109	0.44
BC109A	0.09	BC183LB	0.08	BC337	0.09	BD224	0.40	BF245A	0.22	BU205	1.10	TIP2955	0.60	2N6123	0.40
BC109B	0.09	BC184	0.08	BC338	0.09	BD225	0.30	BF245C	0.24	BU207	0.70	TIP2955	0.60	2N6386	0.90
BC109C	0.09	BC184L	0.08	BC347	0.09	BD233	0.30	BF245D	0.22	BU208	1.00	TIP2955	0.60	2SC1172	1.50
BC113	0.10	BC184LB	0.08	BC348	0.09	BD234	0.30	BF254	0.09	BU208A	1.20	TIP2955	0.60	2SC1306	1.00
BC114	0.10	BC204	0.09	BC348	0.09	BD235	0.30	BF255	0.09	BU208/02	1.80	TIP2955	0.60	2SC2028	1.00
BC115	0.10	BC205	0.09	BC350	0.09	BD236	0.30	BF256	0.22	BU209A	1.30	TIP2955	0.60	2SC2029	2.00
BC116A	0.11	BC206	0.09	BC351	0.09	BD237	0.30	BF257	0.27	BU406	1.00	TIP2955	0.60	2SC2078	1.70
				BC407	0.09	BD238	0.30	BF258	0.27	BU407	1.00	TIP2955	0.60		

## DIODES

AA119	0.06	AA119	0.06
BY127	0.10	BY127	0.10
BY206	0.14	BY206	0.14
BY210	0.50	BY210	0.50
BY254	0.20	BY254	0.20
BY298	0.50	BY298	0.50
BY299	0.50	BY299	0.50
BYX10	0.21	BYX10	0.21
BYX36-150	0.20	BYX36-150	0.20
OA47	0.10	OA47	0.10
OA81	0.10	OA81	0.10
OA85	0.12	OA85	0.12
OA90	0.07	OA90	0.07
OA91	0.07	OA91	0.07
OA95	0.07	OA95	0.07
OA200	0.09	OA200	0.09
OA202	0.09	OA202	0.09
1N914	0.35		


# HART

## LINSLEY-HOOD 300 SERIES AMPLIFIERS




These latest designs from the drawing board of John Linsley-Hood, engineered to the very highest standard, represent the very best that is available on the kit market today. The delicacy and transparency of the tone quality enable these amplifiers to outperform, on a side-by-side comparison, the bulk of amplifiers in the commercial market-place and even exceed the high standard set by his earlier 75-watt design. Three versions are offered, a 30-watt with Darlington output transistors, and a 35- and 45-watt, both with Mosfet output devices. All are of identical outside appearance which is designed to match and stack with our Linsley-Hood cassette recorder 2. As with all Hart kits the constructors interests have been looked after in a unique way by reducing the conventional (and boring) wiring almost to the point of extinction. Any of these kits represents a most cost-effective route to the very highest sound quality with the extra bonus of the enjoyment of building a sophisticated piece of equipment. 30-watt Darlington amplifier, fully integrated with tone controls and magnetic pick-up facility. Total cost of all parts is £81.12. Special offer price for complete kits £72. 35-watt Mosfet amplifier. Total cost of parts £98.41. Special offer for complete kits, £87.40. 45-watt Mosfet amplifier. Total cost of parts £104.95. Special offer price for complete kits £94.80. Reprints of original Articles from Hi-Fi News 50p. Post free. No VAT. Reprints of MOSFET article 25p. No V.A.T. Post free.

### LINSLEY HOOD CASSETTE RECORDER 2

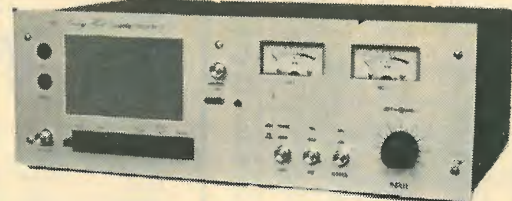

Our new improved performance model of the Linsley Hood Cassette Recorder incorporates our VFL 910 vertical front mechanism and circuit modifications to increase dynamic range. Board layouts have been altered and improved but retain the outstandingly successful mother-and-daughter arrangement used on our Linsley Hood Cassette Recorder 1. This latest version has the following extra features: Ultra low wow-and-flutter of 0.9% - easily meets DIN Hi-Fi spec. Deck controls latch in rewind modes and do not have to be held. Full Auto-stop on all modes. Tape counter with memory rewind. Oil damped cassette door. Latching record button for level setting. Dual concentric input level controls. Phone output. Microphone input facility if required. Record interlock prevents re-recording on valued cassettes. Frequency generating feedback servo drive motor with built-in speed control for thermal stability. All these desirable and useful features added to the excellent design of the Linsley-Hood circuits and the quality of the components used makes this new kit comparable with built-up units of much higher cost than the modest, £94.90 + V.A.T. we ask for the complete kit.

### LINSLEY-HOOD CASSETTE RECORDER 1

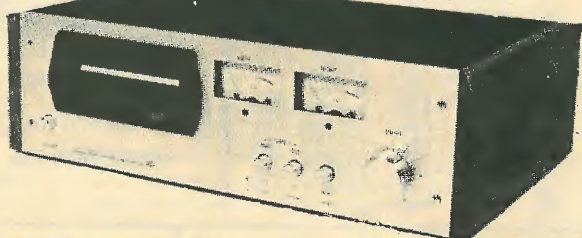

We are the Designer Approved suppliers of kits for this excellent design. The Author's reputation tells all you need to know about the circuitry and Hart expertise and experience guarantees the engineering design of the kit. Advanced features include: High-quality separate VU meters with excellent ballistics. Controls, switches and sockets mounted on PCB to eliminate difficult wiring. Proper moulded escutcheon for cassette aperture improves appearance and removes the need for the cassette transport to be set back behind a narrow finger trapping slot. Easy to use, robust Lenco mechanism. Switched bias and equalisation for different tape formulations. All wiring is terminated with plugs and sockets for easy assembly and test. Sophisticated modular PCB system gives a spacious, easily-built and tested layout. All these features added to the high-quality metalwork make this a most satisfying kit to build. Also included at no extra cost is our latest HS 16 Sendust Alloy super head, available separately at £8.20 but included free with the complete kit at £75 plus VAT. Reprints of the 3 original articles describing this design 45p. No VAT. Reprint of the subsequent postscript article 30p. No VAT.

Part Cost of Post, Packing and Insurance


Order up to £10 - 50p  
Orders £10 to £49 - £1  
Over £50 - £1.50

p&p Export Orders - Postage or shipping at cost plus  
£2 Documentation and Handling

Please send 9 x 4 S.A.E. or telephone for lists giving fuller details and price breakdowns.

Instant easy ordering, telephone your requirements and credit card number to us on.  
Oswestry (0691) 2894

## FEED YOUR MICRO BYTES WITH OUR SOLENOID CONTROLLED CASSETTE DECK



Front loading deck with full solenoid control of all functions including optional search in fast wind modes. 12 volt operation. Fitted 3-digit memory counter and Hall IC Motion Sensor. Standard erase and stereo R/P Heads. Cheapest price ever for all these features. Only £38.90 plus VAT. Full technical specification included.

## HART TRIPLE-PURPOSE TEST CASSETTE TC1

One inexpensive test cassette enables you to set up VU level, head azimuth and tape speed. Invaluable when fitting new heads. Only £2.70 plus V.A.T. and 50p postage.

## CASSETTE HEADS

TYPE	SERIES No.	SECONDARY RMS Volts	RMS Current	PRICE
30va 70 x 30mm 0.45 Kg	1X010	6 + 6	2.50	£4.48 + 0.87p P/P + 0.80p VAT
	1X011	9 + 9	1.66	
	1X012	12 + 12	1.25	
	1X013	15 + 15	1.00	
	1X014	18 + 18	0.83	
	1X015	22 + 22	0.68	
Regulation 18%	1X016	25 + 25	0.60	
	1X017	30 + 30	0.50	
50va 80 x 35mm 0.9 Kg	2X010	6 + 6	4.16	£4.93 + 1.10 P/P + 0.90p VAT
	2X011	9 + 9	2.77	
	2X012	12 + 12	2.08	
	2X013	15 + 15	1.66	
	2X014	18 + 18	1.38	
	2X015	22 + 22	1.13	
Regulation 13%	2X016	25 + 25	0.83	
	2X017	30 + 30	0.68	
80va 90 x 30mm 1 Kg	3X010	6 + 6	6.64	£5.47 + 1.43 P/P + 1.04 VAT
	3X011	9 + 9	4.44	
	3X012	12 + 12	3.33	
	3X013	15 + 15	2.66	
	3X014	18 + 18	2.22	
	3X015	22 + 22	1.81	
Regulation 12%	3X016	25 + 25	1.60	
	3X017	30 + 30	1.33	
120va 90 x 40mm 1.2 Kg	4X010	6 + 6	10.00	£6.38 + 1.43 P/P + 1.17 VAT
	4X011	9 + 9	6.66	
	4X012	12 + 12	5.00	
	4X013	15 + 15	4.00	
	4X014	18 + 18	3.33	
	4X015	22 + 22	2.72	
Regulation 11%	4X016	25 + 25	2.00	
	4X017	30 + 30	2.00	
160va 110 x 40mm 1.8 Kg	5X011	9 + 9	8.89	£8.44 + 1.43 P/P + 1.48 VAT
	5X012	12 + 12	6.66	
	5X013	15 + 15	5.33	
	5X014	18 + 18	4.44	
	5X015	22 + 22	3.63	
	5X016	25 + 25	3.20	
Regulation 8%	5X017	30 + 30	2.66	
	5X018	35 + 35	2.28	
	5X019	40 + 40	2.00	

All prices plus VAT

# HART

HART ELECTRONIC KITS LTD  
OSWESTRY  
SHROPSHIRE  
phone (0691) 2894  
Telex 358661  
Hartel G

## P.&R. COMPUTER SHOP

IBM GOLFBALL PRINTER 3982, £70

EPSON MX-80 80.GPs 3982 IBM I/O PRINTERS DOT MATRIX PRINTER WITH SPECIAL INTERFACES. VDUs, ASCII KEYBOARDS, ASR, KSR, TELETYPES, PAPER TAPE READERS, PAPER TAPE PUNCHES, SCOPES, TYPEWRITERS, FANS 4" 5" 6". POWER SUPPLIES, STORE CORES, TEST EQUIPMENT AND MISCELLANEOUS COMPUTER EQUIPMENT. OPEN: MONDAY TO FRIDAY 9 a.m.-5 p.m., SATURDAY TILL 1 p.m.

COME AND LOOK AROUND  
SALCOTT MILL, GOLDHANGER ROAD  
HEYBRIDGE, ESSEX  
PHONE MALDON (0621) 57440

WW - 024 FOR FURTHER DETAILS

SCOOP ONLY  
£29.95  
+VAT

BRITISH MADE  
52 KEY 7 BIT  
ASCII CODED  
POSITIVE STROBE  
+5V - 12V  
FULL ASCII  
CHARACTERS  
PARALLEL OUTPUT  
WITH STROBE  
POWER LIGHT ON  
CONTROL

## Professional ASCII Keyboards

The 'CHERRY' Computer Keyboard



CHIP BY GENERAL INSTRUMENT (G.I.)  
TTL OUTPUT  
SUPERBLY MADE  
SIZE 13 x 5.5 x 1.5 ins.  
BLACK KEYS WITH WHITE LEDGENS

ESCAPE, SHIFT, RETURN & RESET KEYS  
CONTROL, REPEAT & BELL  
Complete with DATA

Ideal for use with TANGERINE, TRITON, TUSCAN, APPLE and most computers. Ex-Stock from HENRY'S  
This is definitely the BEST BUY. FULLY GUARANTEED. Supplied BRAND NEW in manufacturers original packing. Just post remittance total £35.95 (incl. V.A.T. & Post)

## The 'Apple' Power Supply

A PROFESSIONAL BUILT & TESTED, CASED & VENTILATED POWER UNIT WITH BUILT IN OVERLOAD & CUT OUT PROTECTION CIRCUITS

SPECIFICATIONS  
Input voltage: 210-250v  
Supply voltages: +5.0, +11.8, -12.0, -5.2  
Power consumption 60 watts max. (full load)  
Full load power output:  
+5v: 2.5 amp. -5v: 250ma.  
+12v: 1.5 amp. -12v: 250ma.  
Size 10" x 3 3/4" x 2 1/2"  
Weight (Approx.) 3 lbs

Complete with full data & information - Supplied brand new

The Apple Power Supply is a high-voltage 'switching' power supply. While most other power supplies use a large transformer with many windings to convert the input voltage into many lesser voltages and then rectify and regulate these lesser voltages, the Apple Power Supply first converts the AC line voltage into a DC voltage, and then uses this DC voltage to drive a high-frequency oscillator. The output of this oscillator is fed into a small transformer with many windings. The voltages on the secondary windings are then regulated.

PREVENTS DAMAGE & RETURNS UNIT TO NORMAL WORKING CONDITIONS

I.T.T. 2020 CABINET  
Complete PROFESSIONAL Case handily constructed with cut out for one 'CHERRY' keyboard, plus ample room to house a COMPLETE SYSTEM, and our power supply complete with fittings. (Case top detachable). Unit is silver-grey in colour. Robust construction. Sloping front with side ventilation. Ideal for NASCOM, ACORN, TANGERINE or your own system.



Size 18" x 15 1/2" x 4 1/2" (Front slopes)

A snip at £39.95 incl. VAT post free

Suitable for use with most computers



LIST PRICE £60  
OUR PRICE £32.50  
+VAT  
Just post remittance £39.50 (includes VAT post & packing) for delivery by return

'CHERRY' ADD-ON KEYPAD  
A compact 12 button keypad suitable for use with Cherry keyboard to extend its functions plus four extra keys.

Supplied brand new with data. A 3 x 4 non-encoded single mode keyboard in sloped format

£7.95 +VAT

HENRY'S

COMPERKIT DIVISION  
404 Edgware Road, London, W2 England  
Telephone: 01-402 6822  
Telex: 262284 Mono Transonics



# EPROM PROGRAMMER



NMOS, CMOS  
10 COPY SOCKETS

MODELS:  
S20 for copying  
S30 for copying and Editing

- Displays contents of EPROMS, instruction codes and failure details.
- Protects EPROMS.
- Self tests automatically.
- Simple operation for semi skilled personnel.
- Copies from master EPROM or RAM.
- Verifies master/copies. RAM/master, RAM/copies.
- Serial or parallel interface.

## ELAN DIGITAL SYSTEMS LTD.

16-20 KELVIN WAY, CRAWLEY, SUSSEX. RH10 2TS.  
TEL. CRAWLEY (0293) 510448

WW - 088 FOR FURTHER DETAILS

# I.L.P. TRANSFORMERS

INCREASED PRODUCTION CAPACITY BRINGS LOWER PRICES

## NOW 95 TOROIDAL TYPES FROM 30VA TO 625VA

★ I.L.P. TOROIDALS ★

We use advanced winding technology to make our toroidal transformers. They have only half the weight and height of their laminated equivalents and are appreciably more efficient. Induced hum is reduced by a factor of ten. I.L.P. toroidals cost virtually the same as the older types which they are rapidly replacing. Now increased production capacity means even lower prices. Supplied with rigid mounting kit with centre bolt, steel and neoprene washers. GUARANTEED 5 YEARS.

### CHOICE OF 3 PRIMARY INPUTS

I.L.P. Toroidal Transformers are available in choice of 110V, 220V, 240V, coded as follows: (Secondaries can be connected in series or parallel).  
For 110V Primary insert 0 in place of "X" in type number. For 220V Primary (Europe) insert 1 in place of "X" in type number. For 240V Primary (U.K.) insert 2 in place of "X" in type number.  
Example: 50VA 240V 6+6V 4.16A=22010.

- ★ CUSTOMER DESIGN ENQUIRIES INVITED. QUANTITY PRICE LIST AVAILABLE.
- ★ FREEPOST FACILITY (U.K. only). Simply send your order in envelope marked FREEPOST to address below. NO STAMP REQUIRED.
- ★ TO ORDER Enclose Cheque/Postal Order/Money Order payable to I.L.P. Electronics Ltd. or quote your ACCESS OR BARCLAYCARD account number. VAT must be included with U.K. order. To pay C.O.D. add £1 extra to TOTAL value of order.
- GOODS DESPATCHED WITHIN 7 DAYS OF RECEIPT OF ORDER

TYPE	SERIES No.	SECONDARY RMS Volts	RMS Current	PRICE
225va 110 x 45mm 2.2 Kg.	6X012	12 + 12	9.38	£10.06 + 1.73 P/P + 1.77 VAT
	6X013	15 + 15	7.50	
	6X014	18 + 18	6.25	
	6X015	22 + 22	5.11	
	6X016	25 + 25	4.50	
	6X017	30 + 30	3.75	
Regulation 7%	6X018	35 + 35	3.21	
	6X019	40 + 40	2.81	
	6X020	45 + 45	2.50	
300va 110 x 50mm 2.6 Kg.	7X014	18 + 18	8.33	£11.66 + 1.73 P/P + 2.01 VAT
	7X015	22 + 22	6.82	
	7X016	25 + 25	6.00	
	7X017	30 + 30	5.00	
	7X018	35 + 35	4.29	
	7X019	40 + 40	3.75	
Regulation 6%	7X025	45 + 45	3.33	
	7X033	50 + 50	3.00	
	7X028	110	2.72	
500va 140 x 60mm 4 Kg.	8X017	30 + 30	8.33	£15.53 + 2.05 P/P + 2.64 VAT
	8X018	35 + 35	7.14	
	8X026	40 + 40	6.25	
	8X025	45 + 45	5.55	
	8X033	50 + 50	5.00	
	8X042	55 + 55	4.54	
Regulation 4%	8X028	110	4.54	
	8X029	220	2.27	
	8X030	240	2.08	
625va 140 x 75mm 5.0 Kg.	9X017	30 + 30	10.41	£21.54 + 2.20 P/P + 3.56 VAT
	9X018	35 + 35	8.92	
	9X026	40 + 40	7.61	
	9X025	45 + 45	6.94	
	9X033	50 + 50	6.25	
	9X042	55 + 55	5.68	
Regulation 4%	9X028	110	5.68	
	9X029	220	2.84	
	9X030	240	2.60	

IMPORTANT: Regulator references - All voltages quoted are FULL LOAD. Please add regulation figure to secondary voltage to obtain off load voltage.

See also our ads. pages 90 and 91.

## I.L.P. TRANSFORMERS

FREEPOST T5, GRAHAM BELL HOUSE, ROPER CLOSE, CANTERBURY, CT2 7EP  
Phone (0227) 54778 - Technical (0227) 64723 - Telex 965 780

WW - 029 FOR FURTHER DETAILS

Wirewound Ceramic Resistors  
Axial or vertical mounting  
5w-17w OR5-39K  
from £9.35 per 100

QUICK ACTING & ANTI SURGE CARTRIDGE FUSES

from £3.15 per 100.

## Carbon Film Resistors

(Send for lists of values available)

1/4w £2 per 1,000  
5% 1,000

Carriage & VAT extra  
1/4w, 1/2w, 1w also available

PBRA LTD.  
Golden Green, Tonbridge  
Kent TN11 0LH  
Hadlow (0732) 851345  
Member Crystalate Group

WW - 058 FOR FURTHER DETAILS

# WANTED DEAD OR ALIVE

- ★ CB RADIO ACCESSORIES
- ★ RADIO TELEPHONES
- ★ AMATEUR RADIO EQUIPMENT
- ★ TEST EQUIPMENT
- ★ TRANSISTORS & SPARES

### LARGE OR SMALL QUANTITIES

## WE WILL PAY YOU TOP PRICES AND WILL COLLECT ANYWHERE

# B. BAMBER ELECTRONICS

5 STATION ROAD  
LITTLEPORT, CAMBS.  
Phone ELY (0353) 860185

WW - 060 FOR FURTHER DETAILS

## PM COMPONENTS LTD. VALVE & COMPONENTS SPECIALISTS

DEPT. A, CONINGSBY HOUSE, WROTHAM RD, MEOPHAM, KENT DA13 0HN  
PHONE 0474 813225. TELEX 965966 WEST ST G

SEMICONDUCTORS		INTEGRATED CIRCUITS	
AC126 0.22	BC109B 0.10	AN214Q 2.50	SL490 1.96
AC127 0.22	BC109C 0.11	AN240 2.80	SL918 4.35
AC128 0.22	BC110A 0.11	HA1366W 2.80	SL917B 6.25
AC128K 0.32	BC116A 0.12	LA4031P 2.70	SL1310 1.80
AC141K 0.34	BC117 0.19	LA4032P 2.70	SL1327 1.10
AC142K 0.30	BC119 0.24	LC7120 3.50	SL1327Q 1.10
AC176 0.22	BC125 0.12	LC7130 3.50	SL1431 1.37
AC176K 0.31	BC140 0.31	LC7312 2.50	SN76003N 1.65
AC187 0.26	BC141 0.25	MC1327P 0.95	AC76013N 1.15
AC187K 0.28	BC142 0.21	MC1330P 0.76	SN6023N 1.45
AC188 0.22	BC143 0.24	MC1349P 1.20	SN76033N 1.65
AC188K 0.37	BC147 0.09	MC1350P 0.76	MC1350P 0.76
AD142 0.90	BC148A 0.09	MC1351P 1.00	SN7610N 0.89
AD143 0.82	BC148B 0.09	MC1352P 1.00	SN76131N 1.30
AD149 0.70	BC149 0.09	MC1435 3.00	MC14011BCP 1.55
AD161 0.39	BC157 0.10	MC14049BCP 0.42	SN76227N 1.05
AD162 0.39	BC158 0.09	MC14049BCP 0.43	SN76532N 1.40
AD161/2 1.43	BC171A 0.10	MC14049BCP 0.43	SN76533N 1.30
AF124 0.34	BC178 0.08	MC14049BCP 0.43	SN76544N 1.30
AF125 0.32	BC161 0.28	MC14049BCP 0.43	SN76503N 1.05
AF126 0.32	BC170B 0.10	MC14049BCP 0.43	SN76660N 0.80
AF127 0.32	BC171 0.08	MC14049BCP 0.43	SN76660N 0.70
AF128 0.32	BC171A 0.08	MC14049BCP 0.43	SN76660N 0.70
AF150 0.42	BC171B 0.10	MC14049BCP 0.43	SN76660N 0.70
AF239 0.42	BC172 0.09	MC14049BCP 0.43	SN76660N 0.70
AU106 2.06	BC172B 0.10	MC14049BCP 0.43	SN76660N 0.70
AU107 1.75	BC172C 0.10	MC14049BCP 0.43	SN76660N 0.70
AU110 2.00	BC173 0.10	MC14049BCP 0.43	SN76660N 0.70
AU113 1.48	BC174 0.09	MC14049BCP 0.43	SN76660N 0.70
BC107 0.10	BC174A 0.09	MC14049BCP 0.43	SN76660N 0.70
BC107A 0.10	BC182 0.09	MC14049BCP 0.43	SN76660N 0.70
BC107B 0.10	BC182LB 0.10	MC14049BCP 0.43	SN76660N 0.70
BC108 0.10	BC183 0.09	MC14049BCP 0.43	SN76660N 0.70
BC108A 0.10	BC183L 0.09	MC14049BCP 0.43	SN76660N 0.70
BC108B 0.10	BC184LB 0.09	MC14049BCP 0.43	SN76660N 0.70
BC108C 0.10	BC204 0.10	MC14049BCP 0.43	SN76660N 0.70
BC109 0.10	BC208B 0.13	MC14049BCP 0.43	SN76660N 0.70


NEW BRANDED VALVES		20MM ANTI-SURGE FUSES	
A1998 11.50	E88C 4.00	EM80 0.70	OA2 0.60
A2087 11.50	E88CC 2.60	EM81 0.70	OA3 0.60
A2134 9.00	E130 13.00	EM82 0.70	OA3 0.60
A2293 7.20	E180F 5.25	EM85 0.85	OC3 3.05
A2900 10.90	E186F 7.95	EM87 1.10	OD3 1.15
AC/HL/DD 3.00	E182CC 4.50	EMM803 2.50	OM4 1.00
AC/PEN 3.50	E235L 14.00	EN3 14.00	OM5 3.60
AC/SP3 4.50	E283CC 8.25	EN9 1.95	OM6 2.00
ACVP1 3.50	E810F 8.25	EN92 4.00	PC86 0.80
ACVP2 1.50	EA50 1.00	ES1500 115.00	PC88 0.80
AR6 0.70	EAA91 0.60	EV51 0.80	PC82 0.85
ARP12 0.70	EABC80 0.60	EV83 1.50	PC92 0.85
ARP34 2.00	EAC91 0.90	EV84 8.00	PC97 0.75
ARP35 1.50	EAF42 1.40	EY86/87 0.50	PC90 0.85
ARP37 1.00	EB41 2.30	EY88 0.60	PC84 0.54
B729 1.20	EB91 0.52	EY88 0.60	PC85 0.54
BT17A 95.00	EB91 0.52	EY88 0.60	PC88 0.80
CB131 2.00	EB91 0.52	EY88 0.60	PC88 0.80
CK1 14.00	EB91 0.52	EY88 0.60	PC88 0.80
CK3A 10.00	EB91 0.52	EY88 0.60	PC88 0.80
D3A 30.00	EB91 0.52	EY88 0.60	PC88 0.80
DAC32 1.20	EB91 0.52	EY88 0.60	PC88 0.80
DAF91 0.45	EB91 0.52	EY88 0.60	PC88 0.80
DAF96 0.65	EB91 0.52	EY88 0.60	PC88 0.80
DC30 1.00	EB91 0.52	EY88 0.60	PC88 0.80
DCX4/1000 5.00	EB91 0.52	EY88 0.60	PC88 0.80

ZENER DIODES		BASES	
BZ56 1.00	BZ59 1.00	B7G 0.15	B7G 0.15
BZ62 1.00	BZ63 1.00	B7G 0.15	B7G 0.15
BZ68 1.00	BZ70 1.00	B7G 0.15	B7G 0.15
BZ72 1.00	BZ72 1.00	B7G 0.15	B7G 0.15
BZ77 1.00	BZ77 1.00	B7G 0.15	B7G 0.15
BZ82 1.00	BZ82 1.00	B7G 0.15	B7G 0.15
BZ87 1.00	BZ87 1.00	B7G 0.15	B7G 0.15
BZ92 1.00	BZ92 1.00	B7G 0.15	B7G 0.15
BZ97 1.00	BZ97 1.00	B7G 0.15	B7G 0.15
BZ102 1.00	BZ102 1.00	B7G 0.15	B7G 0.15
BZ107 1.00	BZ107 1.00	B7G 0.15	B7G 0.15
BZ112 1.00	BZ112 1.00	B7G 0.15	B7G 0.15
BZ117 1.00	BZ117 1.00	B7G 0.15	B7G 0.15
BZ122 1.00	BZ122 1.00	B7G 0.15	B7G 0.15
BZ127 1.00	BZ127 1.00	B7G 0.15	B7G 0.15
BZ132 1.00	BZ132 1.00	B7G 0.15	B7G 0.15
BZ137 1.00	BZ137 1.00	B7G 0.15	B7G 0.15
BZ142 1.00	BZ142 1.00	B7G 0.15	B7G 0.15
BZ147 1.00	BZ147 1.00	B7G 0.15	B7G 0.15
BZ152 1.00	BZ152 1.00	B7G 0.15	B7G 0.15
BZ157 1.00	BZ157 1.00	B7G 0.15	B7G 0.15
BZ162 1.00	BZ162 1.00	B7G 0.15	B7G 0.15
BZ167 1.00	BZ167 1.00	B7G 0.15	B7G 0.15
BZ172 1.00	BZ172 1.00	B7G 0.15	B7G 0.15
BZ177 1.00	BZ177 1.00	B7G 0.15	B7G 0.15
BZ182 1.00	BZ182 1.00	B7G 0.15	B7G 0.15
BZ187 1.00	BZ187 1.00	B7G 0.15	B7G 0.15
BZ192 1.00	BZ192 1.00	B7G 0.15	B7G 0.15
BZ197 1.00	BZ197 1.00	B7G 0.15	B7G 0.15
BZ202 1.00	BZ202 1.00	B7G 0.15	B7G 0.15
BZ207 1.00	BZ207 1.00	B7G 0.15	B7G 0.15
BZ212 1.00	BZ212 1.00	B7G 0.15	B7G 0.15
BZ217 1.00	BZ217 1.00	B7G 0.15	B7G 0.15
BZ222 1.00	BZ222 1.00	B7G 0.15	B7G 0.15
BZ227 1.00	BZ227 1.00	B7G 0.15	B7G 0.15
BZ232 1.00	BZ232 1.00	B7G 0.15	B7G 0.15
BZ237 1.00	BZ237 1.00	B7G 0.15	B7G 0.15
BZ242 1.00	BZ242 1.00	B7G 0.15	B7G 0.15
BZ247 1.00	BZ247 1.00	B7G 0.15	B7G 0.15
BZ252 1.00	BZ252 1.00	B7G 0.15	B7G 0.15
BZ257 1.00	BZ257 1.00	B7G 0.15	B7G 0.15
BZ262 1.00	BZ262 1.00	B7G 0.15	B7G 0.15
BZ267 1.00	BZ267 1.00	B7G 0.15	B7G 0.15
BZ272 1.00	BZ272 1.00	B7G 0.15	B7G 0.15
BZ277 1.00	BZ277 1.00	B7G 0.15	B7G 0.15
BZ282 1.00	BZ282 1.00	B7G 0.15	B7G 0.15
BZ287 1.00	BZ287 1.00	B7G 0.15	B7G 0.15
BZ292 1.00	BZ292 1.00	B7G 0.15	B7G 0.15
BZ297 1.00	BZ297 1.00	B7G 0.15	B7G 0.15
BZ302 1.00	BZ302 1.00	B7G 0.15	B7G 0.15
BZ307 1.00	BZ307 1.00	B7G 0.15	B7G 0.15
BZ312 1.00	BZ312 1.00	B7G 0.15	B7G 0.15
BZ317 1.00	BZ317 1.00	B7G 0.15	B7G 0.15
BZ322 1.00	BZ322 1.00	B7G 0.15	B7G 0.15
BZ327 1.00	BZ327 1.00	B7G 0.15	B7G 0.15
BZ332 1.00	BZ332 1.00	B7G 0.15	B7G 0.15
BZ337 1.00	BZ337 1.00	B7G 0.15	B7G 0.15
BZ342 1.00	BZ342 1.00	B7G 0.15	B7G 0.15
BZ347 1.00	BZ347 1.00	B7G 0.15	B7G 0.15
BZ352 1.00	BZ352 1.00	B7G 0.15	B7G 0.15
BZ357 1.00	BZ357 1.00	B7G 0.15	B7G 0.15
BZ362 1.00	BZ362 1.00	B7G 0.15	B7G 0.15
BZ367 1.00	BZ367 1.00	B7G 0.15	B7G 0.15
BZ372 1.00	BZ372 1.00	B7G 0.15	B7G 0.15
BZ377 1.00	BZ377 1.00	B7G 0.15	B7G 0.15
BZ382 1.00	BZ382 1.00	B7G 0.15	B7G 0.15
BZ387 1.00	BZ387 1.00	B7G 0.15	B7G 0.15
BZ392 1.00	BZ392 1.00	B7G 0.15	B7G 0.15
BZ397 1.00	BZ397 1.00	B7G 0.15	B7G 0.15
BZ402 1.00	BZ402 1.00	B7G 0.15	B7G 0.15
BZ407 1.00	BZ407 1.00	B7G 0.15	B7G 0.15
BZ412 1.00	BZ412 1.00	B7G 0.15	B7G 0.15
BZ417 1.00	BZ417 1.00	B7G 0.15	B7G 0.15
BZ422 1.00	BZ422 1.00	B7G 0.15	B7G 0.15
BZ427 1.00	BZ427 1.00	B7G 0.15	B7G 0.15
BZ432 1.00	BZ432 1.00	B7G 0.15	B7G 0.15
BZ437 1.00	BZ437 1.00	B7G 0.15	B7G 0.15
BZ442 1.00	BZ442 1.00	B7G 0.15	B7G 0.15
BZ447 1.00	BZ447 1.00	B7G 0.15	B7G 0.15
BZ452 1.00	BZ452 1.00	B7G 0.15	B7G 0.15
BZ457 1.00	BZ457 1.00	B7G 0.15	B7G 0.15
BZ462 1.00	BZ462 1.00	B7G 0.15	B7G 0.15
BZ467 1.00	BZ467 1.00	B7G 0.15	B7G 0.15
BZ472 1.00	BZ472 1.00	B7G 0.15	B7G 0.15
BZ477 1.00	BZ477 1.00	B7G 0.15	B7G 0.15
BZ482 1.00	BZ482 1.00	B7G 0.15	B7G 0.15
BZ487 1.00	BZ487 1.00	B7G 0.15	B7G 0.15
BZ492 1.00	BZ492 1.00	B7G 0.15	B7G 0.15
BZ497 1.00	BZ497 1.00	B7G 0.15	B7G 0.15
BZ502 1.00	BZ502 1.00	B7G 0.15	B7G 0.15
BZ507 1.00	BZ507 1.00	B7G 0.15	B7G 0.15
BZ512 1.00	BZ512 1.00	B7G 0.15	B7G 0.15
BZ517 1.00	BZ517 1.00	B7G 0.15	B7G 0.15
BZ522 1.00	BZ522 1.00	B7G 0.15	B7G 0.15
BZ527 1.00	BZ527 1.00	B7G 0.15	B7G 0.15
BZ532 1.00	BZ532 1.00	B7G 0.15	B7G 0.15
BZ537 1.00	BZ537 1.00	B7G 0.15	B7G 0.15
BZ542 1.00	BZ542 1.00	B7G 0.15	B7G 0.15
BZ547 1.00	BZ547 1.00	B7G 0.15	B7G 0.15
BZ552 1.00	BZ552 1.00	B7G 0.15	B7G 0.15
BZ557 1.00	BZ557 1.00	B7G 0.15	B7G 0.15
BZ562 1.00	BZ562 1.00	B7G 0.15	B7G 0.15
BZ567 1.00	BZ567 1.00	B7G 0.15	B7G 0.15
BZ572 1.00	BZ572 1.00	B7G 0.15	B7G 0.15
BZ577 1.00	BZ577 1.00	B7G 0.15	B7G 0.15
BZ582 1.00	BZ582 1.00	B7G 0.15	B7G 0.15
BZ587 1.00	BZ587 1.00	B7G 0.15	B7G 0.15
BZ592 1.00	BZ592 1.00	B7G 0.15	B7G 0.15
BZ597 1.00	BZ597 1.00	B7G 0.15	B7G 0.15
BZ602 1.00	BZ602 1.00	B7G 0.15	B7G 0.15
BZ607 1.00	BZ607 1.00	B7G 0.15	B7G 0.15
BZ612 1.00	BZ612 1.00	B7G 0.15	B7G




### EP4000 EPROM EMULATOR PROGRAMMER

- Copy/Program/Emulate 2704/2708/2716(3)/2508/2758/2516/2716/2532/2732 Eproms
- 4K x 8 Static Ram
- Video O/P and 8 digit LED display
- Emulates simply at the push of a key
- Powerful editing facilities
- Comprehensive In/Out (RS232, TTL, 20MA Loop, Parallel, DMA) as standard
- 2764 adaptor now available
- EP4000 ex-stock at £545 + VAT + £12 delivery



### P4000 EPROM PRODUCTION PROGRAMMER

- Program up to 8 Eproms simultaneously
- Covers same Eproms as EP4000
- Powered down sockets
- Independent blank check/verify/program modes
- Simple to use with mode pass/fail LEDs for each copy socket
- Ex-stock at £545 + VAT + £12 delivery



### UV141 BENCH TOP UV140 EPROM ERASERS

- Two units with 14 Eprom capacity
- Safety interlocked
- Electronic timer (UV141)
- Convenient slide tray loading
- UV141 ex-stock at £78 + VAT
- UV140 ex-stock at £81.50 + VAT

## GP INDUSTRIAL ELECTRONICS LTD

UNIT 6, TOTNES INDUSTRIAL ESTATE  
TOTNES, DEVON TQ9 5XL. TEL: (0803) 863360. TELEX: 42596



WW - 049 FOR FURTHER DETAILS

## TV PATTERN GENERATOR

Using the ZNA 234, along with three readily-available CMOS i.c.s. and a ready built u.h.f. modulator, we've formed a very compact pattern generator which is simple to construct and is powered from a mains adaptor. The complete unit, housed in a proprietary case is useful for many servicing applications in the workshop and in the field.

## CHOPPERS RULE O.K.!

Switch mode power supplies are now the rule in colour sets, having finally ousted the thyristor regulated power supply. Servicing them is another matter however ... Derek Snelling provides some useful guidelines.

# TELEVISION

October issue  
WELL WORTH A CLOSER LOOK.

## ELECTROVALUE

74LS00 Series			
74LS	14p	153	77p
00	14p	155	94p
04	16p	156	94p
05	23p	157	60p
08	20p	161	78p
10	19p	163	90p
11	20p	164	90p
14	58p	165	75p
20	18p	166	1.65
30	21p	173	1.00
32	22p	174	85p
37	24p	175	94p
38	35p	191	90p
42	59p	193	90p
47	89p	195	87p
51	25p	196	90p
73	30p	197	85p
74	30p	221	1.10
75	44p	240	1.65
76	30p	241	1.65
85	80p	242	1.42
86	38p	243	1.42
90	44p	244	1.45
92	59p	245	2.03
93	57p	251	85p
107	40p	253	90p
112	38p	257	75p
123	82p	259	1.60
125	45p	266	31p
126	42p	273	1.30
132	60p	279	76p
136	42p	299	2.95
137	1.10	367	56p
138	64p	368	55p
139	70p	373	1.50
145	1.20	374	1.50
148	1.65	378	84p
151	77p	393	85p

MEMORIES			
Prime stock			
2114	£2.40	2708	£3.00
4118	£7.90	2508	£3.50
4116 (200nS)	£1.50	2516	£3.50

(Above prices are net)

2508 and 2516 are single rail

Z80 Series			
Z80 2.5 MHz	£5.00	Z80 PIO 4 MHz	£6.00
Z80A 4MHz	£6.00	Z80 CTC	£6.00
Z80 PIO 2.5 MHz	£5.50	6402 UART	£4.50

(Above prices are net)

### SPECIAL OFFER

**25 x 4116 each £1.30**  
(£32.50 complete, net)

### LOOK OUT FOR CATALOGUE 82

FREE with Practical Electronics Nov. issue

### ORDERING

POSTAGE 40p on orders under £5  
DISCOUNTS (not on net items)  
5% on orders over £20  
10% on orders over £50  
Add V.A.T. at 15% to total value of order

ELECTROVALUE LTD., Dept. WW10, 28 St. Judes Road, Englefield Green, Egham, Surrey, TW20 0HB. Phone Egham 33603 (STD 0784, London 87). Telex 264475.  
Northern Branch (Personal Shoppers only), 680 Burnage Lane, Burnage, Manchester, M19 1NA. Phone (061) 432 4945.

## ALWAYS A CHANGING RANGE OF OSCILLOSCOPES, COMPUTERS, TERMINALS, ETC.

45	PSI - RMS VOLTMETER type A1301	£80
46	STODDART RADIO INTERFERENCE & FIELD INTENSITY METER type N-52A	£250
47	MARCONI (SANDERS) LEVELLING AMPLIFIER type 6587	£140
48	MARCONI DISPLAY OSCILLOSCOPE type TF2212	£100
49	BRANDENBURG PHOTOMULTIPLIER POWER SUPPLY 472R. 0-2KV	£150
50	KETHELY REGULATED HIGH VOLTAGE SUPPLY type 241	£225
51	BRANDENBURG PHOTOMULTIPLIER POWER SUPPLY 0-2500 Volts	£125
52	GENERAL RADIO type 1360B Microwave Oscillator 1.7-4.1 GHz	£650
53	GENERAL RADIO type 1142A Frequency/Discriminator Meter 0-1.5MHz	£200
54	GENERAL OSCILLATORS types 1203C, 1208OL, 1215C with Power Unit type 1269A, 50-960 MHz	£225
55	BRADLEY MULTIMETER TYPE CT471B	£75
56	BEMEX CROSSHATCH/DOOT GENERATOR UHF/VHF	£30
57	ADVANCE AC TRANSISTORISED VOLTMETER TYPE VM78	£18
58	RACAL FREQUENCY COUNTER type 836 32MHz	£50
59	FARNELL SINE/SQUARE OSCILLATOR	£45
60	CROPPICO THERMOCOUPLE POTENTIOMETER type P-4-E	£35
61	E.M.T. WOW & FLUTTER METER	£75
62	MARCONI OUTPUT POWER METER type TF883	£25
63	RHODE & SCHWARZ NOISE GENERATOR SKTU 8N4191/2/60 3-1000MHz	£125
64	RHODE & SCHWARZ STANDARD SIG GENERATOR AM/FM, SDAF BN41023/2	£125
65	TAYLOR SIGNAL GENERATOR type 82A, 4-120MHz, AM/FM	£85
66	TAYLOR RF SIGNAL GENERATOR type 88A/M Mk2	£85
67	ADVANCE Q METER type T1 100kHz-100MHz	£40
68	ADVANCE PULSE GENERATOR type PG5002D	£40
69	ADVANCE MILLIVOLTMETER type VM79. No probe	£25
70	AIRMEC MILV METER type 101	£25
71	TAYLOR WALL TESTER type 45D	£60
72	HEWLETT PACKARD UHF SIGNAL GENERATOR type 612A 450-1200MHz	£175
73	MOSLEY X-Y OSCILLATOR type 20Z. As is	£120
74	B & K LEVEL RECORDER type 2305, 50dB Potentiometer. Brand new with accessories	£950
75	B & K LEVEL RECORDER type 2305	£375
76	MARCONI AM SIGNAL GENERATOR type TF801D/BS 10-485 MHz	£150
77	MARCONI UHF SIGNAL GENERATOR type TF1060	£150
78	RACAL UNIVERSAL COUNTER TIMER CT488 (SA540 with SA545) As is	£45
79	SOLARTRON PULSE GENERATOR type GO.1101.2	£40
80	RACAL DIGITAL FREQUENCY METER SA520. As is	£10
81	RACAL DIGITAL FREQUENCY METER type 806R 32MHz	£35
82	AVO TRANSISTOR ANALYSER type TA	£40
83	MUIRHEAD DECADE OSCILLATOR type D-890-A	£85
84	DAWE STROBOFLASHER type 1201E	£25
85	HUNTS CAPACITOR ANALYSER & RESISTANCE BRIDGE type CRB3	£45
86	AVO TRANSISTOR TEST METER type CT1537	£70
87	ADVANCE STABILISED POWER UNIT type PPI 0.600V; 300MA	£40

### A MUST FOR THE COMPUTER OR VIDEO MAN

CONRAC 14" MONITOR. Solid-state sync. plus video input sockets. Not cased. Used but tested. **£35 each. Carriage £5**  
Other monitors available including colour. Please enquire.  
PLEASE CHECK AVAILABILITY BEFORE ORDERING

### CONVERT THIS UNIT TO A SUPER BATTERY CHARGER

Attractive green ministry quality case with removable top and bottom plates - heavy duty power switches, high powered resistors to control current, good quality centre mounted amp meter, strip of wing nut terminals on front panel which can be used for connecting leads. All this for £3.50. P&P £3. Four units £12. Carriage £6.

### SOME TEKTRONIX 500 RANGE OSCILLOSCOPES

with Single Trace Plug-ins. Working.  
From £100. Phone for details

### MULTIMETER Russian Type 4324

AC/DC volts; AC/DC current; ohms, etc. Brand new, boxed  
**£12.50 each P&P £2.50.**

### GENERAL PURPOSE OSCILLOSCOPE

TECH TYPE TP2  
Single beam. Size approx. 6 x 7 x 9 3/4in. Weight 7lbs. Ideal for the beginner or school user.  
**ONLY £49.50 each P&P £3**

### METROHM INSULATION AND CONTINUITY TESTER 500 volts

Portable, Battery Operated, Standard P.P.7 (Battery not supplied). Complete with carrying case.  
As new £40 each  
Used but good condition £25 each. P&P £3.

### TRANSISTOR INVERTOR

115V AC 1.7 Amp Input. Switching is at 20KHz. Output windings from Pot Core. Can be rewound to suit own purpose or unit can be broken for host of components. Circuits supplied. **£1.25 each. P&P £2.**

### COSSOR VDU with KEYBOARD

80 characters x 13 lines; 600/1200 baud; RS232; standard 240 volts input; screen size 9 inches.  
Very good condition. Tested. Limited quantity.  
**£70 each. Carriage at cost.**

### STEPPING MOTORS

6/12 position with additional where the rotor is coils. Device can be used as a tachometer. Diagram supplied. Will actually work on 5 volts. 12/24 recommended.  
**£1.50 each P&P 75p**  
or 5 for £5 P&P £1.50.

### KEYBOARD PAD

Size 3x2 1/2x2" with 12 Alma Reed Switches. Blue keys marked in green 0-9 and a star with one blank.  
**£4 each. P&P £1, or 5 for £15 P&P £2.**

### MINIATURE KEYBOARD

Push contacts, marked 0-9 and A-F and 3 optional function keys. **£1.75 each.**

### DIODES

All new full spec devices. IN3063; BAX13; IS44; IN3470; IN4151. 100 off £1.50; 1000 off £10.

### CRYSTALS

Flat metal case - 19.2KHz; 844.8KHz; 87G - 10MHz. **50p each**

### PULSE TRANSFORMER

Sub min. Size 1/2 x 5/16 x 1/4". Secondary centre tapped. New 20p ea.  
REMO TYE MULTIPLIER. 1-wd high voltage outputs and focus. £1 each.  
DON'T TAKE CHANCES. Use the proper EHT CABLE. 10p per meter or £7.50 per 100 metre/drum. P&P £2.  
PHOTOGRAPHIC LAMPS. Pearl 230V 500 watt. Screw cap. 75p ea. Box of 12 £5.50. P&P £1.50.  
INFRA RED QUARTZ LAMPS. 230V 620 watts. Size 1 1/2" x 1 1/8" dia. £1.50 ea. 240V 1650 watts. Size 2 3/4" x 1 1/2" dia. £3 ea.  
BRIDGE RECTIFIER. 2 Amp 50p ea.  
PHOTODIODE DETECTOR. Fly leads. 25p ea.  
AMPHENOL 17-way chassis mount edge connectors 0.1 spacing. 15p ea.  
I.E.C. Standard MAINS LEAD. Moulded (3 vertical flat pins centre offset) 60p ea.  
FANS. 115V 13 watts. Size 3 1/4 x 3 1/4 x 1 1/2". BRAND NEW. £4.50 ea. Secondhand £2.50 ea.  
DELAY LINE. 50 nanosecs. 3 connections - ground-in-out. Size 2 x 7/16 x 5/16". New 25p ea.

### TRANSFORMERS

AUTO 240V input 115V. 1 Amp output £1.25 each. P&P £1.25. 240V input. Sec. 6V, 1.86A. Size 2 1/2 x 2 1/2". Good quality £1.50 ea. P&P £1.  
240V input. Sec. 12V 0.92A. Size 2 1/2 x 2 1/2". Good quality. £1.50 ea. P&P £1.  
340V input 12V 100MA. Size 60 x 40 x 42mm. 50p each.  
240V input. Sec. 12-0-12V 50MA. Size 53 x 45 x 40mm. £1 ea.  
115V input. Sec. 5V 250MA. Size 1 1/16 x 1 1/2 x 1 1/4". 2 for 50p.  
115V input. Sec. 10-0-10V1A. Size 2 1/2 x 2 x 2 1/2". 2 for £1.50.  
SEMICONDUCTORS IN4005 - 3p; IN4002 - 3p.  
At 25p each:  
BC147, BC157, BC158, BC237, BF197, OA90, OA81, BC148B, BA154, BA243.  
TIPI31, TIPI4A, 2N5696, AF139, 2TX341.  
BY127 10p; BF181 20p; BD239 49p; BD241 40p; MA343AT 49p; BD228 50p; BD233 & BD234 Comp Pair 25V - 80p per pr. at 50p each.  
REGULATOR TBA625 8 to 20V in - 5V out 100MA TO5 Con. 50p each BF256C 20p.  
TV AMPLIFIER TBA 120 20p each.

### MOTOROLA DUAL In Line 6-pin Opto Coupler 30p each. Gold plate tester version 50p each.

ELECTROSTATIC VOLTMETER. 7.5KV £8 ea. P&P £1.50.  
Other ranges available - please enquire.  
TRIMMERS. Sub min. 0.25 to 1.25 pf. 1 to 4.5 pf. 7 to 45 pf. All at 8p each.  
HONEYWELL humidity controllers 50p each.  
THYRISTOR TIMER. Solid State. 15 secs adjustable (reset) in plastic relay case. Standard 7-pin base. Series delay 50p each.  
MINIATURE PC MOUNT SLIDE SWITCH. 2 pole 2 way 10p each.  
4 DIGIT 7 SEGMENT per digit plus a figure one to the left plus a centre minus sign to the left of the figure one with decimal places between digits. Good brilliance at 1.5V. 15 connections £2.50 each.  
Some E.H.T. TRANSFORMERS and CAPACITORS available. Please enquire.  
TELEPHONES 706 style black; grey or blue £5.50 ea; 746 style black or grey £7.50. Older style black £2.50 each. Discarded by 706 £4 ea. P&P £1.50 per telephone.  
DC SERVO MOTOR 110V 2.5 Amp continuous. Double shaft. Brand new. 4 wire 4 brush £18 ea. Plus carriage.  
PC Mount POTS. Wire wound with knob 200 ohm & 10 ohm. 10p ea.  
MIN. RELAY 24V. 2 pole c/o. Brand new 75p each.  
TIME DELAY RELAY 0.1 to 10 secs. 115V AC. DPDT. £5 each.  
CAPACITORS at 5p each. 0.1uf 400V. Small rec. block PC Mount German class; 3300pf; 220nf 250V; 0.01me 160V.  
INSERT can be used as Microphone/Earpiece (Like used as insert in telephone but superior quality). Ex-Min. Brand new wrapped 75p each, or 10 for £8.  
TOROIDAL TRANSFORMERS. Input 0-120-240 Volts. Output 0-12V; 0-12V; 10VA per winding. Encapsulated - identical to R.S. Components at £8.90. OUR SPECIAL PRICE £5 ea. P&P £1.50.  
TANTALUM CAPACITORS - All at 10p each - 100 off £7.50. 22mf 6V; 39mf 10V; 22mf 35V; 1mf 35V.  
MINIATURE SLIDE SWITCHES. Single pole 2 way 10p each. 10 off 90p.  
HEAVY DUTY RHEOSTAT. 7.5ohm, 5.5Amp. Diameter 5". Standard 1/4" shaft £2.50 each. P&P £1.50.

### MINIMUM ORDER £3 VALUE OF GOODS. MINIMUM P&P £1.50 - where P&P not stated please use own discretion - excess refunded. £5 CARRIAGE ON ALL UNITS. P&P OR CARRIAGE AND VAT at 15% on total MUST BE ADDED TO ALL ORDERS. CALLERS VERY WELCOME STRICTLY BETWEEN 9am-1pm and 2-5pm Monday to Saturday inc. BARCLAYCARD (VISA) and ACCESS taken. Official orders welcome.

# CHILTMHEAD LTD

NORWOOD ROAD, READING  
(2nd turning left past Reading Technical College in King's Road then first right - look on right for door with "Spoked Wheel")  
TELEPHONE NO. READING 669656

# sabtronics

## An entire range of low-cost high-performance instruments



8610A 600 MHz FREQUENCY METER



\* 2037A L.C.D. HAND HELD DMM WITH TEMPERATURE

- \* 2010A 3 1/2 DIGIT L.C.D. DMM
- \* 2015A 3 1/2 DIGIT L.C.D. DMM
- \* 2035A 3 1/2 DIGIT L.C.D. HANDHELD DMM
- \* 8110A 100 MHz 8 DIGIT FREQUENCY METER
- \* 8610B 600 MHz 9 DIGIT FREQUENCY METER
- \* 8000B 1 GHz 9 DIGIT FREQUENCY METER
- \* 5020A 200 KHz FUNCTION GENERATOR
- \* LP-1 10 MHz LOGIC PROBE

\* ALSO AVAILABLE IN KIT FORM

Test our low priced test equipment. It measures up to the best. Compare our specs and our prices - no-one can beat our price/performance ratio.

## sabtronics

"Making Performance Affordable"

Full colour illustrated brochure and price list from: BLACK STAR LTD, 9a Crown Street St. Ives, Cambs, PE17 4EB Tel: (0480) 62440. Telex: 32339



WW - 026 FOR FURTHER DETAILS

### PEAK PROGRAMME AND DEVIATION MONITORING

#### PEAK DEVIATION METER



Sound Broadcast Show, Birmingham Sept. 29th

For monitoring mono or stereo FM stations either off air or at the transmitter. This is a rack mounting unit calibrated in kHz, percent and decibels including a 7.5kHz deviation standard, with 400Hz and 53kHz modulating frequencies, and a high impedance probe head for use with a monitor receiver. During programme monitoring the true peak multiplex deviation with a very fast attack time meter gives much more insight into modulation levels and limiter overshoots than spectrum analyser displays or standard programme meters showing the decoded stereo signals.

#### PROGRAMME AND DEVIATION CHART RECORDERS

One- or two-channel units which record levels on inkless paper scaled 1-7 and 0-100kHz. The paper travels at 3 or 12cm/hour and may be switched to monitor Left, Right, Sum, Difference and, with the above unit, Peak Deviation.

Broadcast Monitor Receiver 150kHz-30MHz \* Stereo Disc Amplifier 2 and 3 \* 10 Outlet Distribution Amplifier \* Stabilizer \* Frequency Shift Circuit Boards \* Moving Coil Pre-amplifier \* PPM2 and PPM3 Drive Circuits with Ernest Turner Movements \* Illuminated PPM Boxes, Coaxial TWIN with sum and difference and Mono \*

SURREY ELECTRONICS, The Forge, Lucks Green, Cranleigh, Surrey GU8 7BG - Tel: 04866 5897

### LOW VOLTAGE POWER DRILLS AND ACCESSORIES

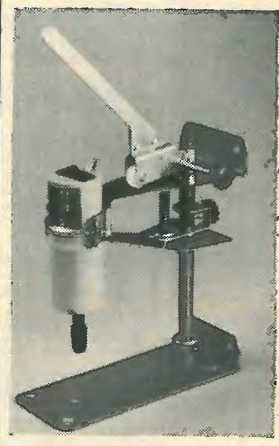


Illustration shows Titan Drill and Stand (Price £27 inc. VAT and Postage) which is One of the combinations which can be purchased from our comprehensive range of Drills and Accessories.

Prices from £8.34 (Reliant Drill only) inc. VAT and Postage.

Send 25p for Catalogue.

#### A. D. BAYLISS & SON LTD.

PFERA WORKS, REDMARLEY GLOUCESTER GL19 3JU

Barclaycard, Access Welcome

Tel. Bromsbury (053 181) 273.

Stockists: Richards Electric, Gloucester D & D Models, Hereford Hoopers of Ledbury Hobbs of Ledbury



NATIONAL

### SC/MP Microprocessor

INS8060N (ISPA/600N)

EX-STOCK

## SPECIAL OFFERS

### TANTALUM CAPACITORS

.1-35v	25+	100+	25+	100+
.22-35v	.06	.055	6.8-35v	.095
4-7-35v	.06	.055	10-50v	.18
	.095	.085	15-35v	.18
				.165

### ELECTROLYTIC CAPS

AXIAL	25+	100+	RADIAL	25+	100+
2.2-63v	.03	.025	2.2-63v	.03	.025
10-63v	.035	.03	10-16v	.03	.025
100-25v	.045	.04	220-16v	.045	.04

FULL SPECIAL OFFER LIST AVAILABLE

We also stock Microprocessors, CMOS, TTL, Transistors, Capacitors, Potzf-gometers, Connectors, etc. Free catalogue available to trade customers only. Enquiries welcome.

Please add £1.50 handling charge and 15% V.A.T.

## Harrison Bros.

Electronic Distributors  
22 Milton Road, Westcliff-on-Sea  
Essex SS0 7JX, England  
Tel: Southend-on-Sea (0702) 32338

WW - 015 FOR FURTHER DETAILS

## PRINTED CIRCUITS

### FOR WIRELESS WORLD PROJECTS

Stripline r.f. power amp—Sept. 1975—1 d.s.	£5.00
Audio compressor/limiter—Dec. 1975—1 s.s. (stereo)	£4.25
F.m. tuner (advanced)—April 1976—1 s.s.	£5.00
Cassette recorder—May 1976—1 s.s.	£5.00
Audio compander—July 1976—1 s.s.	£4.25
Time code clock—August 1976—2 s.s. 3 d.s.	£15.00
Date, alarm, b.s.t. switch—June 1977—2 d.s. 1 s.s.	£9.50
Audio preamplifier—November 1976—2 s.s.	£8.50
Additional circuits—October 1977—1 s.s.	£4.00
Stereo coder—April 1977—1 d.s. 2 s.s.	£8.50
Morse keyboard and memory—January 1977—2 d.s. (logic board 10 1/4 in. x 5 in.) (keyboard and matrix 13 in. x 10 in.)	£14.00
Low distortion disc amplifier (stereo)—September 1977—1 s.s.	£2.00
Low distortion audio oscillator—September 1977—1 s.s.	£3.50
Synthesized f.m. transceiver—November 1977—2 d.s. 1 s.s.	£12.00
Morsemaker—June 1978—1 d.s.	£4.50
Metal detector—July 1978—1 d.s.	£3.75
Oscilloscope waveform store—October 1978—4 d.s.	£18.00
Regulator for car alternator—August 1978—1 s.s.	£2.00
Wideband noise reducer—November 1978—1 d.s.	£5.00
Versatile noise generator—January 1979—1 s.s.	£5.00
200MHz frequency meter—January 1979—1 d.s.	£7.00
High performance preamplifier—February 1979—1 s.s.	£5.50
Distortion meter and oscillator—July 1979—2 s.s.	£5.50
Moving coil preamplifier—August 1979—1 s.s.	£3.50
Multi-mode transceiver—October 1979—10 d.s.	£35.00
Amplification system—Oct. 1979—3 preamp 1 poweramp	£4.20 each
Digital capacitance meter—April 1980—2 s.s.	£7.50
Colour graphics system—April 1980—1 d.s.	£18.50
Audio spectrum analyser—May 1980—3 s.s.	£10.50
Multi-section equalizer—June 1980—2 s.s.	£8.00
Floating-bridge power amp—Oct. 1980—1 s.s. (12V or 40V)	£4.00
Nanocomp—Jan. 1981—1 d.s. 1 s.s.	£9.00
Logic probe—Feb. 1981—2 d.s.	£6.00
Modular frequency counters—March 1981—8 s.s.	£20.00
Opto-electronic contact breaker (Delco)—April 1981—2 s.s.	£4.00

Boards are glassfibre, roller-tinned and drilled. Prices include V.A.T. and U.K. postage.  
Airmail add 20%, Europe add 10%, Insurance 10%.  
Remittance with order to:  
**M. R. SAGIN, 23 KEYES ROAD, LONDON, N.W.2**

WW - 034 FOR FURTHER DETAILS

### TRANSFORMERS CONTINUOUS RATINGS

MAINS ISOLATORS (screened)				12 or 24-VOLT RANGE			
Pri 0-120; 0-100-120V (120, 220, 240V) Sec 60				Separate 12V windings Pri 220-240V			
Ref. VA (Watts)	£	P&P	Ref. 12v Amps	24v	£	P&P	
55-0-55	60	twice to give 55, 60, 110, 115, 120, 125, 175, 180, 220, 225, 230, 235, 240V.	111	0.5	0.25	2.42	
71	2.0	1.0	213	1.0	0.5	2.90	
149	60	7.37	71	2.0	1.0	3.86	
150	100	8.38	18	4.0	2.0	4.46	
151	200	12.28	85	5.0	2.5	6.16	
152	250	14.61	70	6.0	3.0	6.99	
153	350	18.07	102	8.0	4.0	8.16	
154	500	22.52	72	10.0	5.0	8.93	
155	750	32.03	176	12.0	6.0	9.99	
156	1000	40.92	115	16.0	8.0	11.79	
157	1500	56.52	115	20.0	10.0	15.87	
158	2000	67.99	187	30.0	15.0	19.72	
159	3000	95.33	226	60.0	30.0	40.41	
161	6000	203.65					

\*115 or 240v sec only. State volts required. Pri 0-220-240V.

50 VOLT RANGE				30 VOLT RANGE (Split Sec)			
Pri 220-240V. Volt available 5, 7, 8, 10, 13, 15, 17, 20, 25, 30, 33, 40 or 20V-0-20V or 25V-0-25V.				Pri 220-240V. Volt available 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30V or 12V-0-12V or 15V-0-15V.			
Ref. 50v	25v	£	P&P	Ref. 30v	15v	£	P&P
102	.5	1	3.75	112	0.5	1	2.90
103	1	2	4.57	79	1	2	3.93
104	2	4	7.88	3	2	4	6.35
105	3	6	9.42	20	3	6	7.39
106	4	8	12.82	21	4	8	8.79
107	6	12	16.37	51	5	10	10.86
108	8	16	22.29	117	6	12	12.29
109	12	24	32.89	88	8	16	16.45
				89	10	20	18.98
				90	12	24	21.09
				91	15	30	24.18
				92	20	40	32.40

60 VOLT RANGE				SCREENED MINIATURES Pri 240V			
Pri 220-240V. Volt available 5, 7, 8, 10, 13, 15, 17, 20, 24, 30, 36, 40, 48, 60V, or 24V-0-24V or 30V-0-30V.				Pri 220-240V (Split Sec)			
Ref. 60v	30v	£	P&P	Ref. mA	Sec Volts	£	P&P
124	5	1	4.27	238	200	3-0-3	2.83
126	1	2	6.50	212	1A, 1A	0-6-0-6	3.14
127	2	4	8.36	13	100	0-9-0-9	2.35
125	3	6	12.10	235	330, 330	0-9-0-9	3.05
123	4	8	13.77	207	500, 500	0-8-9, 0-8-9	3.88
40	5	10	17.42	208	1A, 1A	0-8-9, 0-8-9	2.19
120	6	12	19.87	236	200,200	0-15-0-15	2.88
121	8	16	27.92	239	50MA	12-0-12	3.08
122	10	20	32.51	214	300, 300	0-20-0-20	3.75
189	12	24	37.47	221	700 (DC)	20-12-0-12-20	5.09
				206	1A, 1A	0-15-20, 0-15-20	4.39
				203	500, 500	0-15-27, 0-15-27	6.64
				204	1A, 1A	0-15-27, 0-15-27	

400/440V ISOLATORS				AUTO TRANSFORMERS			
400/440 to 200/240				Voltages available 105, 115, 190, 200, 210, 220, 230, 240. For step up or step down.			
VA	Ref.	£	P&P	Ref. VA (Watts)	£	P&P	
60	243	7.37	1.20	113*	15	0-10-115-210-240V	
250	246	4.81	2.04	64	80	0-10-115-210-240V	
350	247	18.07	2.04	4	150	0-10-115-200-220-240V	
500	248	22.52	OA	67	500	0-10-115-200-220-240V	
1000	250	45.94	OA	84	1000	0-10-115-200-220-240V	
2000	252	67.99	OA	93	1500	0-10-115-200-220-240V	
3000	253	95.32	OA	95	2000	0-10-115-200-220-240V	
6000	254	189.02	OA	73	3000	0-10-115-200-220-240V	
				80s	4000	0-10-115-200-220-240V	
				57s	5000	0-10-115-200-220-240V	

CASED AUTOS				CONSTANT VOLTAGE TRANSFORMERS ± 1%			
240V cable input USA 115V outlets				For 'clean' mains to computers, peripherals.			
VA	Price	P&P	Ref	250VA	£95.00		
20	£6.55	.95	56W	500VA	£127.00	p&p	
75	£8.50	1.20	64W	1kVA	£147.00	+ VAT	
150	£11.00	1.44	4W	2kVA	£229.00	VAT	
200	£12.02	1.44	65W			Also I.C. sensing types to 6% for low voltage problems	
250	£13.38	1.44	69W				
500	£20.13	2.04	67W				
1000	£30.67	2.20	84W				
2000	£49.97	OA	95W				

SPLIT BOBBIN TRANSFORMERS			
Pri 0-115; x2. Sec voltages available: 3, 4, 5, 6, 8, 9, 10, 12, 15, 18, 20, 24, 30V, or 12-0-12V or 15-0-15V. 1 Amp £2.06 + 98p p&p + VAT. 2 Amps £4.11 + £1.20 p&p + VAT.			
Ref. Amp	Price	P&P	
171	500MA	2.30	.52
172	1A	3.26	.90
173	2A	3.95	.90
174	3A	4.13	.99
175	4A	6.30	1.10

Overseas post extra

### OTHER PRODUCTS

AVO TEST METERS		MAINS BATTERY ELIMINATORS	
8 Mk. 5 Latest Model	£116.40	No wiring, ready to plug into 13A socket. 3, 6, 7.5, 9, 12V DC 400mA	£5.10 + VAT. 6, 7.5, 9V DC 300mA £4.60 + P&P 69p + VAT.
71 (Electronics & TV Service)	£63.90		
MIMS Minor	£40.50		
DA211 LCD Digital	£57.00		
DA212 LCD Digital	£74.00		
DA116 LCD Digital	£121.70		
Megger 70143 500v	£97.20		
Megger Battery BMT	£65.30		
Avo Cases and Accessories	P&P £1.32 + VAT 15%		

PANEL METERS		ANTEX SOLDERING IRONS 15W	
43 x 43mm or 82 x 78mm	£6.70 ea + 76p P/P + VAT	Safety stand P&P £1.75	25W X25 £4.58
50mA, 500mA, 1mA, 30V d.c.			

BRIDGE RECTIFIERS		TELEPHONES	
200v	2A	45p	Latest model 746, brand new, boxed, 2 tone grey £11.50, Ivory £12.50, P&P £1.20 + VAT.



# THE SHARP MZ-80K HAS GOT IT ALL



**NOW WITH PASCAL (CASSETTE BASED)**

**NOW ONLY R.R.P. £460 + Vat 48K**

Since its introduction the Sharp MZ-80K has proved to be one of the most successful and versatile microcomputer systems around. Sharp now have a comprehensive range of products ready to make the powerful MZ-80K with its Printer and Disc Drives even more adaptable.

Products include: - Universal Interface Card, Machine Language and Z-80 Assembler packages, CP/M\* plus a comprehensive range of software.  
\* Trade mark of Digital Research Ltd.

You'll find all the help and advice you need about the MZ-80K at your Specialist Sharp Dealer in the list below.

If there is no dealer in your area, or if you require any further information write to: Computer Division Sharp Electronics (UK) Ltd., Sharp House, Thorp Road, Newton Heath, Manchester M10 9BE.

**SHARP**  
*First, and foremost*

## GET IT ALL HERE ...

**AVON**  
BCG Shop Equipment Ltd  
Bristol, Tel: 0272 425338  
Decimal Business M/Cs Ltd  
Bristol, Tel: 0272 294591

**BEDFORDSHIRE**  
H.B. Computers (Luton) Ltd  
Luton, Tel: 0582 416887

**BERKSHIRE**  
Newbear Computing Store Ltd  
Newbury, Tel: 0635 30505

**BIRMINGHAM**  
Camden Electronics  
Small Heath, Tel: 021-773 8240

**E.B.S. Ltd**  
Birmingham, 1, Tel: 021-233 3045  
Electronic Business Systems Ltd  
Birmingham, Tel: 021-384 2513

**Jax Rest Ltd**  
Birmingham, Tel: 021-328 4908

**NEWBEAR COMPUTING STORE LTD**  
Birmingham B26, Tel: 021-707 7170

**BUCKINGHAMSHIRE**  
Interface Components Ltd  
Amersham, Tel: 02403 22307

**CHESHIRE**  
Charlesworth of Crewe Ltd  
Crewe, Tel: 0270 56342  
Cash Register Services  
Chester, Tel: 0244 317549  
Chandos Products  
New Mills, Tel: New Mills 44344  
Cheshire Computer Services Ltd  
Levenshulme, Tel: 061-225 4763

**FLETCHER WORTHINGTON LTD**  
Hale, Tel: 061-928 8928

**NEWBEAR COMPUTING STORE LTD**  
Stockport, Tel: 0772 51686  
Ors Group Ltd  
Warrington, Tel: 0925 67411

**CLEVELAND**  
Hunting Computer Services Ltd  
Stockton-on-Tees, Tel: 0642 769709

**DERBYSHIRE**  
Low Electronics Ltd  
Matlock, Tel: 0629 2817

**DEVON**  
Crystal Electronics Ltd  
Torquay, Tel: 0803 22699

**Plymouth Computers**  
Plymouth, Tel: 0752 23042

**EXETER**  
Peter Scott (Exeter) Ltd  
Exeter, Tel: 0392 73309

**KENT**  
South Coast Business M/Cs  
Ferdunton, Tel: 0202 893040

**ESSEX**  
Prorole Ltd  
Westcliff-on-Sea, Tel: 0702 335298

**GLoucestershire**  
Gloucestershire Shop Equipment Ltd  
Gloucester, Tel: 0452 36012

**HAMPSHIRE**  
Advanced Business Concepts  
New Milton, Tel: 0425 618181

**Xitan Systems Ltd**  
Southampton, Tel: 0703 39890

**KENT**  
Video services (Bromley) Ltd  
Bromley, Tel: 01-460 8833

**LANCASHIRE**  
H.R. Control Systems Ltd  
Chorley, Tel: 02572 75234

**Sound Service**  
Burnley, Tel: 0282 38481

**Sumid Electronics Ltd**  
Preston, Tel: 0772 51686

**The Micro Chip Shop**  
Blackpool, Tel: 0253 403122

**LEICESTERSHIRE**  
Gilbert Computers  
Lubenham, Tel: 0858 65894

**G.W. Cowling Ltd**  
Leicester, Tel: 0533 556268

**Leicester Computer Centre**  
Leicester, Tel: 0533 556268

**MAYES HI FI**  
Leicester, Tel: Leics 22213

**LINCOLNSHIRE**  
Howes Elect. & Autom. Servs.  
Lincoln, Tel: Lincoln 32379

**Z.R. Business Consultants**  
Lincoln, Tel: 0522 680087

**LONDON**  
Bridgewater Accounting  
Whetstone, Tel: 01-446 0320

**Butel-Comco Ltd**  
Hendon, Tel: 01-202 0262

**Central Calculators Ltd**  
London EC2, Tel: 01-729 5588

**Digital Design & Development**  
London W1, Tel: 01-637 7388

**Euro-Calc Ltd**  
London W1, Tel: 01-405 3223

**Euro-Calc Ltd**  
London EC2, Tel: 01-729 4555

**Euro-Calc Ltd**  
London W1, Tel: 01-636 5560

**Lion Computer Shops Ltd**  
London W1, Tel: 01-387 7388

**Personal Computers Ltd**  
London EC2, Tel: 01-626 8121

**Scope Ltd**  
London EC2, Tel: 01-729 3035

**Sumlock Bondain Ltd**  
London EC1, Tel: 01-253 2447

**MANCHESTER**  
Sumlock Electronic Services Ltd  
Manchester M3, Tel: 061-834 4233

**Sumlock Software Ltd**  
Manchester M3,  
Tel: 061-228 3502

**MERSEYSIDE**  
Microdigital Ltd  
Liverpool, Tel: 051-227 2535

**Sota Communication Systems**  
Liverpool L14, Tel: 051-480 5770

**NORFOLK**  
Sumlock Bondain (East Anglia)  
Norwich, Tel: 0603 26259

**NORTHAMPTONSHIRE**  
Computer Supermarket  
Corby, Tel: 05366 62571

**H.B. Computers Ltd**  
Kettering, Northamptonshire,  
Tel: 0536 520910

**NORTHERN IRELAND**  
**Bromac (U.K.)**  
Co. Antrim, Tel: 023831 3394

**O & M Systems**  
Belfast, Tel: 0232 49440

**The Microcomputer Centre (N.1.)**  
Belfast, Tel: Belfast 682277

**NOTTINGHAMSHIRE**  
Mansfield Business M/C Ltd  
Mansfield, Tel: 0623 26610

**OXFORDSHIRE**  
Oxford Computer Centre  
Oxford, Tel: 0865 49349

**REPUBLIC OF IRELAND**  
O'Connor Computers Ltd  
Galway, Tel: 0009 61173

**Tomorrows World Ltd**  
Dublin 2, Tel: 0001 776861

**SALOP**  
Computer Corner  
Shrewsbury, Tel: 0743 59788

**SCOTLAND**  
**A & G Knight**  
Aberdeen, Tel: 0224 630526

**Business and Electronics M/Cs**  
Edinburgh, Tel: 031-226 5454

**Orval Automation**  
Worthing, Tel: 0903 501355

**WALES**  
Limrose Electronics Ltd  
Wrexham, Tel: 097 883 5555

**Morriston Computer Centre**  
Swansea, Tel: 0792 795817

**Sigma Systems Ltd**  
Cardiff, Tel: 0222 21515

**WARWICKSHIRE**  
Business & Leisure Microcomputers  
Kenilworth, Tel: 0926 512127

**WORCESTERSHIRE**  
Capricorn Computer Systems  
Worcester, Tel: 0905 21541

**YORKSHIRE**  
Bits & P.C.'s  
Vetherby, Tel: 0937 63744

**Datron Micro-Centre Ltd**  
Sheffield, Tel: 0742 585490

**Huddersfield Computer Centre**  
Huddersfield, Tel: 0484 20774

**Superior Systems Ltd**  
Sheffield, Tel: 0742 755005

**Ram Computer Services Ltd**  
Bradford, Tel: 0274 399166

WW - 076 FOR FURTHER DETAILS

### BSR DE LUXE AUTOCHANGER £20

Plays 12", 10" or 7" records, Auto or Manual. A high quality unit backed by BSR reliability. Stereo Ceramic Cartridge, AC 200/250V. Size 13 1/2 x 11 1/4in. 3 speeds. Above motor board 3 3/4in. Below motor board 2 1/2in. with Operating Stereo Cartridge. Post £2 Board £1 extra

### HEAVY METAL PLINTHS Post £2

Cut out for most BSR or Garrard decks. Silver grey finish. Size 16x13 3/4in. £4

### DECCA TEAK VENEERED PLINTH. Post £1.50

Superior finish with space and panel for small amplifier. Board is cut for B.S.R. or Garrard. 18 1/4in x 14 1/4in x 4in. Black silver fascia trim. £5

### WOOD PLINTH, TEAK EFFECT Size 15 x 15 x 3in. £3

with board cut for B.S.R. (Post £1)

### PIONEER and J.V.C. TEAK VENEERED PLINTH Post £2

19 x 14 1/2in. with Plastic Cover 17 3/4 x 13in £10.50

### TINTED PLASTIC COVERS Post £1.50

Sizes: 14 1/2 x 12 1/2 x 3in. £5. 18 1/4 x 12 1/2 x 3in. £8 18 x 13 1/4 x 4in. £6. 17 1/4 x 9 1/2 x 3 1/2in. £3.

### BSR SINGLE PLAYER DECKS

**BSR P172 RIM DRIVE QUALITY DECK**  
Manual or automatic play. Precision ultra slim arm. Cueing device. Bargain price With stereo ceramic cartridge **£20** Post £2

**BSR P207 BUDGET SINGLE PLAYER** ideal for disco or small two-speed Hi-Fi system with stereo cartridge and cueing device. **£15** Post £2

BSR ready cut mounting board. Only £1 extra.

### GARRARD 6-200 SINGLE PLAYER DECK

Brushed Aluminium Arm with stereo ceramic cartridge and Diamond Stylus, 3 speeds. Manual and Auto Stop/Start. Large Metal Turntable. Cueing Device and Pause Control. **£22** Post £2

### BATTERY ELIMINATOR MAINS TO 9 VOLT D.C.

Stabilised output, 9 volt 400 mA. U.K. made in plastic case with screw terminals. Safety overload cut out. Size 5 x 3 1/4 x 2 1/2in. Transformer Rectifier Unit. Suitable Radios, Cassettes, models, **£4.50**. Post 65p.

### DELUXE SWITCHED MODEL STABILISED VOLTAGES

3-6-7-9-12 volt 400mA DC max. Universal output plug and lead. Pilot light, mains switch, polarity switch, **£7.50**. Post 65p.

### DRILL SPEED CONTROLLER/LIGHT DIMMER KIT.

Easy to build kit. Controls up to 480 watts AC mains. £3. Post 65p. **DE LUXE MODEL READY-BUILT 800** watts plus Photo Electric Sunset "On" feature. Front plate fits standard box, **£4**.

### ECHO CHAMBER or REVERB

Good quality unit with endless play tape cartridge. Stationary play heads ensure good reproduction and echo variance is achieved by changing tape speed. Input imp: 50k and 600 ohms. Power: 240 volts A.C. **£68**. Post £2. Spare tape £5.

### RELAYS. 12V DC £1.25. 6V DC 95p. 18V £1.25.

BLANK ALUMINIUM CHASSIS. 6 x 4 - £1.20; 8 x 6 - £1.50; 10 x 7 - £1.90; 12 x 8 - £2.20; 14 x 9 - £2.50; 16 x 6 - £2.40; 16 x 10 - £2.70. All 2 1/2in. deep. 18 swg

### ANGLE ALL. 6 x 3/4 x 3/4in. 18 swg. 25p.

ALUMINIUM PANELS. 18swg. 6 x 4 - 36p; 8 x 6 - 60p; 14 x 3 - 60p; 10 x 7 - 80p; 12 x 8 - 90p; 12 x 5 - 60p; 16 x 6 - 90p; 14 x 9 - £1.20; 12 x 12 - £1.30; 16 x 10 - £1.40.

### PLASTIC AND AL BOXES IN STOCK. MANY SIZES

ALUMINIUM BOXES. 4 x 4 x 1 1/2 £1. 4 x 2 1/2 x 2 £1. 3 x 2 x 1 80p. 6 x 4 x 2 £1.30. 7 x 5 x 2 1/2 £1.45. 8 x 6 x 3 £2.20. 10 x 7 x 3 £2.50. 12 x 5 x 3 £2.30. 12 x 8 x 3 £3. All 18swg.

### BRIDGE RECTIFIER 200V PIV 2a £1.4a £1.50. 8a £2.50.

TOGGLE SWITCHES SP 30p. DPST 40p. DPDT 50p.

### RESISTORS. 100 to 10M. 1/4W. 1/2W. 1W. 1p. 2W 10p.

HIGH STABILITY. 1/2w 2% 10 ohms to 1 meg. 8p. Ditto 5%. Preferred values. 10 ohms to 10 meg. 3p.

### WIRE-WOUND RESISTORS 5 watt. 10 watt. 15 watt 20p

PICK-UP CARTRIDGES SONATONE 9TAHC £2.50. BSR Stereo Ceramic SC7 Medium Output £2.

### PHILIPS PLUG-IN HEAD. AU1020 (G306 - GP310 - GP233 - AG3306 - AG3310) £2.

LOCK TITE SEALING KIT DECCA 118. Complete £1.

### SOLDERING IRON 240V 40W. 5mm bit £2.95.

JACK PLUGS Mono Plastic 25p; Metal 30p.

### JACK PLUGS Stereo Plastic 30p; Metal 35p.

JACK SOCKETS Mono Open 20p; Closed 25p.

### JACK SOCKETS Stereo Open 25p; Closed 30p.

FREE SOCKETS - Cable end 30p. 2.5mm and 3.5mm JACK SOCKETS 20p. 2.5mm and 3.5mm JACK PLUGS 20p.

### DIN TYPE CONNECTORS

Sockets 3-pin, 5-pin 10p. Free Sockets 3-pin, 5-pin 25p. Plugs 3-pin 20p; 5-pin 25p.

### PHONO PLUGS and SOCKETS ea. 10p.

Free Socket for cable end ea. 15p. Screened Phono Plugs ea. 15p.

### POTENTIOMETERS Carbon Track

5k11 to 2M. LOG or LIN. L/S 50p. DP 90p. Stereo L/S £1.10. DP £1.30. Edge Pot 5K, SP 45p. Sliders Mono 65p. Stereo 85p.

### MINI-MULTI TESTER

Deluxe pocket size precision moving coil instrument. Impedance + Capacity - 2000 ohms. Battery included. 11 instant ranges measure: DC volts 10, 50, 250, 1000. AC volts 10, 50, 250, 1000. DC amps 0-100mA. Continuity and resistance to 1 meg ohms in two ranges. **£6.50** Post 65p

### NEW PANEL METERS £4

50µa 100µa 500µa, 1ma, 5ma, 50ma, 100ma, 25 volt, 50 volt, VU Meter. Fixing hole 1 1/2in. dia. Lighting kit 6 or 12V 90p extra. 1ma (240° scale) 2 1/4in. sq. **£5** Post 65p

### RCS SOUND TO LIGHT CONTROL KIT

Kit of parts to build a 3 channel sound to light unit 1,000 watts per channel. Suitable for home or disco **£15** Easy to build. Full instructions supplied. Cabinet Post 95p **£4.50** extra. Will operate from 200mV to 100 watt signal. 200 Watt Rear Reflecting White Light Bulbs. Ideal for Disco Lights, Edison Screen. 6 for £4, or 12 for £7.50. Post 65p.

### "MINOR" 10 watt AMPLIFIER KIT £14

This kit is suitable for record players, guitars, tape playback, electronic instruments or small PA systems. Two versions available: Mono, £14; Stereo, £20. Post £1. Specification 10W per channel; input 100mV; size 9/2 x 3 x 2in. approx. SAE details. Full instructions supplied. AC mains powered. Input can be modified to suit guitar.

### RCS STEREO PRE-AMP KIT. All parts to build this pre-amp.

Inputs for high, medium or low imp per channel, with volume control and PC Board **£2.95** Can be ganged to make multi-way stereo mixers Post 65p.

### MAINS TRANSFORMERS

250-0-250V 70mA, 6.3V 2A, £4.50 Post £2  
250-0-250V 50mA, 6.3V 3.5A, 6.3V 1A, £5.00 Post £2  
350-0-350V 250mA, 6.3V 6A C.T., £12.00 Post £2  
300-0-300V 120mA, 2x6.3V 2A C.T.; 5V 2A, £10.00 Post £2  
220V 45mA, 6.3V 2A, £2.50 Post £1

### GENERAL PURPOSE LOW VOLTAGE

Tapped outputs available  
2 amp. 4, 5, 6, 8, 9, 10, 12, 15, 18, 25 and 30V £6.00 Post £2  
1 amp. 6, 8, 10, 12, 16, 18, 20, 24, 30, 36, 40, 48, 60 £6.00 Post £2  
2 amp. 6, 8, 10, 12, 16, 18, 20, 24, 30, 36, 40, 48, 60 £9.50 Post £2  
3 amp. 6, 8, 10, 12, 16, 18, 20, 24, 30, 36, 40, 48, 60 £12.50 Post £2  
5 amp. 6, 8, 10, 12, 16, 18, 20, 24, 30, 36, 40, 48, 60 £16.00 Post £2  
12V 100mA £1.20 Post 65p  
12V 750mA £2.00 Post 65p  
10-0-10V 2a £3.00 Post £1  
10V, 30V, 40V, 2a £3.50 Post £1  
30V, 5a and £5.00 Post £1  
17-0-17V 2a £4.50 Post £2  
0.5, 1, 10, 16V, 1/2a £2.50 Post 65p  
9V, 3a £3.50 Post £1  
25-0-25V 2a £4.50 Post £1  
30V, 1/2a £3.50 Post £1  
6V 1/2a £2.00 Post £1  
15-0-15V, 2a £3.75 Post £1

### AUTO WOUND 115V to 240V 150W £9; 400W £11; 500W £12 2

CHARGER TRANS Post RECTIFIERS Post  
6-12 volt 3a £4.00 Post £2 6-12 volt 2a £1.10 Post 80p  
6-12 volt 4a £6.50 Post £2 6-12 volt 4a £2.00 Post 80p

### OPUS COMPACT SPEAKERS

FLUTED WOOD FRONTS TEAK VENEERED CABINET 11 x 8 1/2 x 7 1/2in 15 watts 50 to 14,000 cps. 4 ohm or 8 ohm **£10.00** Pair Post £2

### LOW VOLTAGE ELECTROLYTICS ALL 10p

1mf, 2mf, 4mf, 8mf, 10mf, 16mf, 25mf, 30mf, 50mf, 100mf, 250mf, 500mf. All 15 volts. 22 mf/6v/10v; 25 mf/6v/10v; 47 mf/10v/10v; 50 mf/6v/10v; 68 mf/6v/10v/10v; 100 mf/6v/10v/10v; 150 mf/6v/10v/10v; 200 mf/10v/16v; 220 mf/4v/10v/16v; 330 mf/4v/10v; 500 mf/16v/6v; 680 mf/6v/10v/16v; 1000 mf/2.5v/4v/10v; 1500 mf/6v/10v/16v; 2200 mf/6v/10v; 3300 mf/6v; 4700 mf/4v. ALL 10p.

### 500mF 12V 15p; 25V 20p; 50V 30p.

1000mF 12V 20p; 25V 35p; 50V 50p; 100V 70p.

### 2000mF 6V 25p; 25V 40p; 40V 60p; 1200mF 76V 80p.

2500mF 50V 70p; 3000mF 63V 85p; 2000mF 100V £1.

### 4500mF 64V £2. 4700mF 50V £1.20. 2700mF 76V £1.

### HIGH VOLTAGE ELECTROLYTICS

8/450V 45p 8-8/450V 75p 32-32+16/350V 90p

8/800V £1.20 8-16/450V 75p 100+100/275V 65p

16/350V 45p 20+20/450V 75p 150+200/275V 70p

32/500V 75p 32+32/350V 50p 220/450V 95p

32/350V 50p 32+32/500V £1.80 80+40/500V £2

50/500V £1.20 50+50/300V 50p

### VALVE OUTPUT Transformers (small) 90p.

TRIMMERS 10pF, 30pF, 50pF, 50pF, 150pF, 15p.

CAPACITORS Various 10pF to 100,000pF 5p.

PAPER 350V-0-1.7p; 0.5 13p; 1mF 150V 20p; 2mF 150V 20p; 500V-0-001 to 0.05 12p; 0.1 15p; 0.25 25p; 0.47 35p.

### MICRO SWITCH SINGLE POLE CHANGEOVER 30p.

SUB-MIN MICRO SWITCH, 30p. Single pole changeover.

TWIN GANG, 120pF 50p; 500pF £1.

GEARED TWIN GANGS 20pF 95p; 365pF £1.

### NEW baker Star sound

high power full range quality loudspeakers produced to give exceptional reproduction. Ideal for Hi-Fi, music P.A. or discotheques. These loudspeakers are recommended where high power handling is required with quality results. The high flux ceramic magnet ensures clear response.



MODEL	INCHES	OHMS	WATTS	TYPE	PRICE	POST
MAJOR	12	4-8-16	30	HI-FI	£14	£2
DELUXE MK II	12	8-16	15	HI-FI	£14	£2
SUPERB	12	8-16	30	HI-FI	£24	£2
AUDITORIUM	12	8-16	45	HI-FI	£22	£2
AUDITORIUM	15	8-16	80	HI-FI	£34	£2
GROUP 45	12	4-8-16	45	PA	£14	£2
GROUP 75	12	4-8-16	75	PA	£22	£2
GROUP 100	12	8-16	100	PA	£24	£2
GROUP 100	15	8-16	100	PA	£32	£2
DISCO 100	12	8-16	100	DISCO	£24	£2
DISCO 100	15	8-16	10			

# Better communication is the key to efficiency so visit.....



WEST CENTRE HOTEL, LILLIE ROAD, LONDON

**NOVEMBER 4-6, 1981**  
10.00-18.00 hrs (closing 17.00 hrs on the last day)



The Viewdata Exhibition For Professional & Business People gives you the businessman the ideal opportunity to see how easy it is to extract the latest information at the touch of a button.

Come and see why the most important companies in Britain are now heavily involved in viewdata. Benefit from the vast experience of exhibitors like British Telecom, GEC, Philips, Granada, Rediffusion, Radio Rentals, Visionhire, ITT, Bishopsgate, Centronics, Viewdata Business Systems and many others who are there to.....

## OPEN NEW DOORS FOR THE EFFICIENT DEVELOPMENT OF YOUR BUSINESS

Entrance to the exhibition is **FREE** by registration

So save time at the door.....

**WRITE FOR YOUR ADVANCE TICKETS TO:**  
Viewdata Tickets, IPC Exhibitions Ltd, Surrey House, 1 Throwley Way, Sutton, Surrey SM1 4QQ.

Please note all applications for tickets must be received by October 26, 1981 to allow time for processing.

# Practical Computing

is just what it says —

a practical guide for people who are getting to grips with personal computers and want to know more...

More about equipment. Down to earth reviews of personal computers and peripherals which are on the market — and why some are better than others.

More about software. How to write it. What to look for in business software. Evaluations of software packages to take the guess-work out of your software purchases.

More about applications. What can you do with a personal computer? Case studies of the ways in which people as diverse as businessmen, manufacturers and doctors are using computers in

their everyday work.

One way or another it's a pretty fair bet that there's a computer in your future. Being used by a colleague at work. On your children's Christmas list. Or in the back of your mind — just waiting to be bought — perhaps for use in your business.

That's where Practical Computing comes in. For only 80p you can keep up with your colleagues, stay a jump ahead of your children and maybe make a better choice when you buy your own computer...

Act now. Get the October issue of Practical Computing from your newsagent or complete the coupon.

To Marketing Department, IPC Electrical-Electronic Press, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.  
Please send me Practical Computing for one year. I enclose Cheque/P.O. for £10 (U.K.)/£16 (overseas) made payable to IPC Business Press Ltd.

Name \_\_\_\_\_  
Address \_\_\_\_\_

WW9



Baby's first byte  
Reviews:  
Rair 3/30 v.  
Vector Graphic  
VisiCalc  
look-alikes  
Prestel adaptors  
WordPro tips  
DIY word processor  
Portable graphics  
Virtual memory

### RHODE & SCHWARZ

Selective UHF V/Meter. Bands 4 & 5. USVF  
Selectomat Voltmeter USWV £450.  
UHF Sig. Gen. type SDR 0.3-1GHz  
UHF Signal Generator SCH £175.  
XUD Decade Synthesizer & Exciter.  
POLYSKOPS SWOB I and II.  
Modulator / Demodulator BN17950/2.

### MARCONI

TF995B/2 AM/FM Signal Generator.  
TF2500 Audio power meter  
TF1101 RC oscillators £65.  
6551 SAUNDERS. 1400-1700MHz. FM.  
TF1066B/1. 10-470MHz. AM/FM.  
TF1152A/1. Power meter. 25W. 500MHz  
£50.  
TF1370A RC Oscillator £135.  
TF791D Carrier Deviation Meter.

### BECKMAN TURNS COUNTER DIALS

Miniature type (22mm diam.). Counting up to 15 turn "Helipot". Brand new with mounting instructions. Only £2.50 each.

### ★ COOLING FANS & BLOWERS ★

WOODS centrifugal type. 240VAC and 24VDC versions available. Dims. 8x5 1/2". Outlet diameter 2x2 3/4". £9.50 (£1 post).  
Plannette fans. 110/240V Cap start (supplied). 6" diameter. £7.50 each. (£1 post).  
Plannette snail type. 110/240V. 8x7". Outlet diameter 3x2 1/2". £9.50 (£1 post).  
A.C.I. Snail type. 110/250V. 6x4". Outlet 1 1/2x1 1/2". £8.50 (£1 post).  
Smiths 12V DC 'car heater type'. £6.50. (£1 post).  
Rotron 4 1/2x4 1/2". 115V £4.50. 230V £5. 3x3" 115V £4. 230V £5. (PP 35p ea.)

### SEALED LEAD ACID BATTERIES


Gould GELYTE type PB660. 6V. 6A.H. Measures 3 3/4x2 3/4x2 3/4 inches. Excellent condition. £4.50. (75p post).

### 20-WAY JACK SOCKET STRIPS.

3 pole type with two normally closed contacts £2.50 each (+ 25p pp). Type 316 three pole plugs for above — 20p ea. (pp free).

### P. F. RALFE ELECTRONICS

10 CHAPEL STREET, LONDON, NW1  
TEL: 01-723 8753

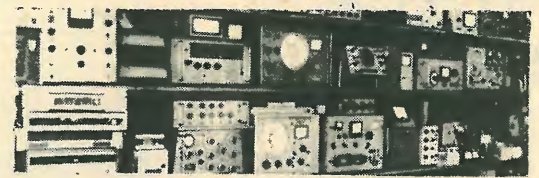

RANK KALEE 1742 Wow & Flutter Meter.  
AIRMEC 314A Voltmeter. 300mV (FSD)-300V.  
AIRMEC Wave Analyser types 853 & 248A.  
DERRITRON 1KW Power Amplifier with control equipment for vibration testing, etc.  
HEWLETT-PACKARD 8551B/851B Spectrum Analyser. 10MHz-40GHz.  
HEWLETT-PACKARD tuned amp & null detector.  
HEWLETT-PACKARD 331A Distortion Meter  
RADIOMETER Distortion Meter BKF6 £125.

### ★ RADIO & TELEVISION TEST EQUIPMENT ★

TEXSCAN DU-88 X-Y Display scopes £95  
TELONIC 2003 Sweep Generator System 0-1000MHz £250  
TELONIC 101 X-Y Display scopes £75  
TELONIC 1204 0-500MHz sweep generator £150  
TELONIC 121 display scopes £95  
UNADHM EP685A PAL Colour Generator. Video/RF £295  
KORTING Colour TV Service gen. VHF/UHF, PAL/NTSC £295  
LABGEAR UHF/VHF Pal Colour generator. £45  
LABGEAR UHF Monochrome C.H. & dot patterns. £200  
PHILIPS FM Stereo signal generators PM6456 £275  
FERROGRAPH RT52 Recorder Test Set

### ★ OSCILLOSCOPES ★

#### TEKTRONIX 500 SERIES SCOPES AT BARGAIN PRICES:

All in good working order. Available to callers only  
TYPE 543B with 'CA' plug-in. 25MHz DB £125  
TYPE 545B with 'CA' plug-in. 25MHz DB £185  
TYPE 585A with '82' plug-in. 80MHz DB £250

PLEASE NOTE. All the pre-owned equipment shown has been carefully tested in our workshop and reconditioned where necessary. It is sold in first-class operational condition and most items carry a three months guarantee. For our mail order customers we have a money-back scheme. Repairs and servicing to all equipment at very reasonable rates. PLEASE ADD 15% VAT TO ALL PRICES.

### DC POWER SUPPLIES

★APT 10459/8. 12-14V @ 5 Amps £25 (£2 p.p.)  
★APT 10459/8. 24V @ 5 Amps £25 (£2 p.p.)  
★We can supply the above power supply at any fixed voltage between 5V and 36V at 5A £25.  
★Mullard Dual supplies. Brand new with handbook. Pos & Neg 12V at 1A and 0.4A respectively. Dimensions 9x4x5ins. £10 + (£1 p.p.)  
★FARNELL Current limited. Dimensions 7x5x4ins. Following types available: 13-17 Volts @ 2A £15. 27-32 Volts @ 1A 5V £15. 5V @ 3A £15. (pp £1.50).

### SPECIAL PURCHASE LAMBDA POWER SUPPLIES

Excellent LXS Series DC power units at less than a tenth of new price. The snag? — they're all 110V AC Input. Prices as follows:  
5V at 24A. LXS DS 0V R. £25. (List £350).  
15V at 12A. LXS DS 15 R. £20. (£339).  
5V at 14A. LXS CC 5 0V. £20. (£258).  
24V at 3.1A. LCS C 24. £15. (£223).  
Carriage each £2.50 extra

### MODULATION METERS

AIRMEC 210 3-300MHz. AM/FM. £125  
RADIOMETER AFM/1.3.5-320MHz. AM/FM. £145  
RACAL 409 3-600MHz. AM/FM.

### ROTRON INSTRUMENT COOLING FANS

Supplied in excellent condition, fully tested:  
115V. 4.5 x 4.5 x 1.5" £4.50. 230V £5. 115V. 3 x 3 x 1.5" £4 + postage ea. 35p.

### 100V DC ELECTROLYTIC CAPACITORS

Sprague 'Powerlytic' type 36D. 10,000uF. 100V. Brand new at surplus price! Only £4 ea. PP 50p.

### BELL & HOWELL MICROFICHE VIEWERS

Type SR5. Screen size 9 x 5in. New condition. £50.

### DIGITAL MULTI-METERS

DE FOREST ELECTRONICS TYPE MM200. DC V 0-1KV. AC V 0-700. DC I 0-1A. AC I 0-1A. Each in 4 ranges. Resistance 0-19.99 Mohms. 5 ranges. LED Display 1999.  
BRAND NEW. SPECIAL REDUCED PRICE OF £39, INCLUDING VAT & P.P.

# JOIN THE PROFESSIONALS...

If you are looking for amplification, take advantage of the same superb quality Crimson modules that the BBC, IBA, KEF and numerous recording studios have been using for years! Our expertise in this field of electronic design is internationally renowned, our reputation is based on quality, reliability and value for money and when it comes to technology, our modules feature possibly some of the world's most advanced audio circuitry yet devised. The Crimson range of audio amplifier modules is available to industry and public alike and is backed by full technical data, free technical advisory service, fast delivery and a full range of complimentary components available such as toroidal power supplies and heatsinks, etc.

TYPE	O/P 8 ohms*	O/P 4 ohms	PSU	H/sinks	Slew limit	S/N	Sensitivity	THD (typ)	FR (-3dB)	Size
CE 608	38	—	CPS 80	H550	30Vu/s	110dB	775mV	0.0035%	1.5Hz-50KHz	80-120-25
CE1004	44	70	CPS150	H550/100	30Vu/s	110dB	775mV	0.0035%	1.5Hz-50KHz	80-120-25
CE1008	65	—	CPS150	H550/100	30Vu/s	110dB	775mV	0.0035%	1.5Hz-50KHz	80-120-25
CE1704	85	121	CPS250	HS100/150/FM1	30Vu/s	110dB	775mV	0.0035%	1.5Hz-50KHz	80-120-25
CE1708	125	—	CPS250	HS100/150/FM1	30Vu/s	110dB	775mV	0.0035%	1.5Hz-50KHz	80-120-25
CE3004	170	250	CPS250	HS150/FM2	30Vu/s	110dB	775mV	0.008 %	1.5Hz-50KHz	161-102-35
CPR1X	output	775mV	REG1	—	3Vu/s	70dB	2.8mV	0.008 %	10Hz-50KHz	138-80-35
MC1X	output	2mV	REG1	—	3Vu/s	65dB	70/150uV	0.008 %	10Hz-50KHz	80-120-35
XO2/3	output	775-2500mV	REG1	—	9Vu/s	90dB	775mV	0.01 %	Preset	150-50-20

\*Power output is quoted in WRMS and is given for two modules off the same power supply. Higher powers can be obtained if using our dual power supplies or one module per PSU or if using a stabilised power supply.

**Crimson modular audio amplifiers feature**  
★ low values of transient and steady-state distortions ★ envelope distortion (below 500 Hz) less than 0.05% ★ on board electronic protection ★ PCB pin and edge connector termination ★ full range of complimentary components available ie. PSUs, heatsinks, etc.

**NEW:** We now have a completely new Hi-Fi Kit package to offer:  
**CK 1010** contains CPR1X, all metalwork connectors wire, etc., to make a complete pre-amp.

**CK 1040** contains 2 x 608s, all metalwork dual power supply, connectors, heatsinks, wire, etc., to make a complete 40 w/channel power amp.

**CS 1100** as CK 1040 but at 100 w/channel  
Unlike other module manufacturers CRIMSON have a major share of the esoteric, specialist Hi-Fi market. Unlike many manufacturers we acknowledge the massive audible differences that small component/circuit changes can produce. However our amplifiers are technically outstanding have been subjectively 'tuned' to a stunning level of crisp and detailed reproduction.

Power amp modules	Power supply modules	Heatsinks	COMPLETE KITS
CE 608 £21.00	CPS80 £24.50	HS 50 £26.24	PRE-AMP CK1010 £90.00
CE1004 £24.50	CPS80D £27.50	HS100 £31.77	POWER AMP CK1040 £119.00
CE1008 £27.50	CPS150 £35.00	HS 50 £29.74	POWER AMP CK1100 £149.00
CE1704 £35.00	CPS150D £35.00	FM1 £36.40	(MOVING COIL ADD-ON £25.00)
CE1708 £35.00	CPS250 £49.00	FM2 £36.83	
CE3004 £49.00	CPS250D	£45.34	
Pre amp modules	Active crossovers		
CPR1X £36.00	XO2 £32.00		
MC1X £9.30	XO3 £9.30		
REG1 £3.30	MU1		

All prices include VAT. Please add £1.10 for orders up to £20.00, £2.50 up to £50 and £2.65 £50 and over. To allow for post and packing (UK only).

Export—No problem. Please write for quotation or quote your Visa/Master-Charge card number.



**Crimson Elektrik**  
9 Claymill Road, Leicester LE4 7JJ · Tel 0533 761920 · Telex 34964 Chamco C Crimlek

Please send me more details of all CRIMSON ELEKTRIK amplifier modules

Name \_\_\_\_\_ Address \_\_\_\_\_ Ref: WW/10

# electronic office equipment

now you can reach more new users than you ever knew existed.


Office Systems is new. And it's unique. It's the first quality monthly magazine for directors, partners and senior managers who are new or potential users of electronic office equipment.

Office Systems will solve their problems and answer their questions in clear, businessman's English. No jargon. Office Systems will solve advertisers' problems too—with a controlled circulation of named, requested readers right from the start and a total circulation of 32,000. It will operate a reader-reply service. No wastage. No waiting. Ad. Manager Tony Kaminski is waiting for your call.


FIRST ISSUE: OCTOBER '81

For more details contact Ad. Manager Tony Kaminski at Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS Tel: 01-661 3105

Published by IPC Electrical-Electronic Press Ltd  
A member of IPC Business Press Ltd

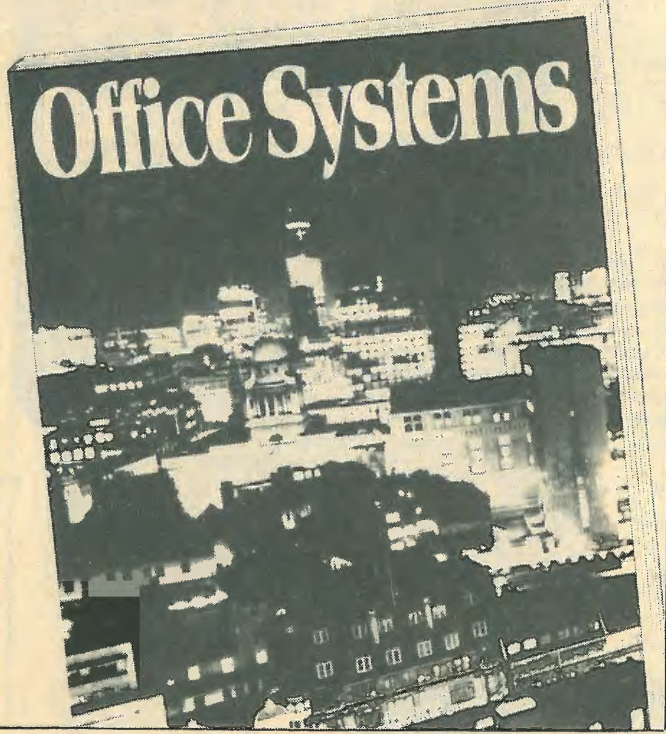

## MEASURE UP TO YOUR NEEDS WITH GROTECH

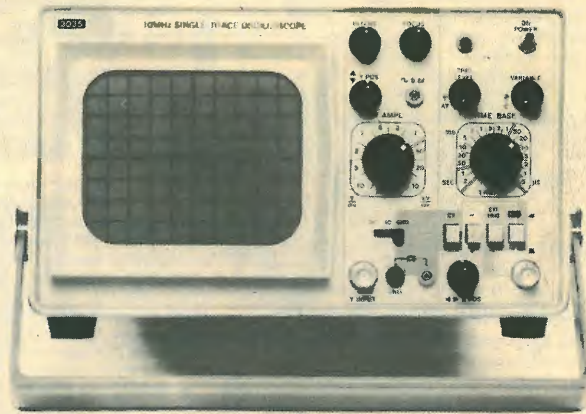


TYPE 3035

**DC-10MHz Bandwidth**  
**5mV/div sensitivity**  
**200ns/div to 0.2s/div timebase**  
**Triggering to 20MHz**  
**5" Bright CRT**

**Triggered and automatic sweep**  
**Regulated internal supplies**  
**10 x 8 div display**  
**BUILT-IN COMPONENT TESTER** £165\*

If your need falls between 10MHz and 30MHz then we can measure up to it, including battery operated models. Every scope in the range is designed to meet our basic design philosophy of building in that extra benefit. The 3035 has a full 10MHz scope specification, plus a Component Tester which displays the characteristics of both active and passive components. While the 3337 is a complete 30MHz instrument with signal delay, plus a 10KV CRT for a bright display normally reserved for much wider bandwidth scopes.

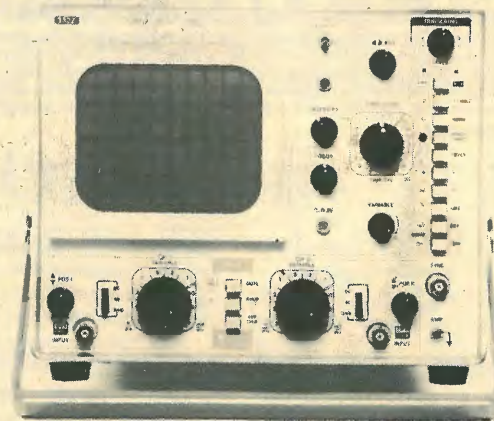

TYPE 3337

\*U.K. LIST EXC VAT

**DC-30MHz Bandwidth**  
**11.7ns Risetime**  
**5mV/div sensitivity**  
**Signal Delay**  
**Algebraic addition and subtraction**

**Full X-Y operation**  
**Triggering to 50MHz**  
**Composite trigger mode**  
**40ns/div - 1s/div Sweep speeds**  
**C.R.T. 10KV PDA** £355\*

For your copy of the Crotech catalogue just telephone Reading (0734) 866945

**Crotech Instruments Limited**

5 Nimrod Way, Elgar Road, Reading, Berks. RG2 0EB.

WW - 017 FOR FURTHER DETAILS

To obtain further details of any of the coded items mentioned in the Editorial or Advertisement pages of this issue, please complete one or more of the attached cards entering the reference number(s). Your enquiries will be passed on to the manufacturers concerned and you can expect to hear from them direct in due course. Cards posted from abroad require a stamp. These Service Cards are valid for six months from the date of publication.

Please Use Capital Letters

If you are way down on the circulation list, you may not be getting the information you require from the journal as soon as you should. Why not have your own copy?

To start a one year's subscription you may apply direct to us by using the card at the bottom of this page. You may also apply to the agent nearest to you, their address is shown below.

### OVERSEAS SUBSCRIPTION AGENTS

- Australia:** Gordon & Gotch (Australasia) Ltd, 380 Lonsdale Street, Melbourne 3000, Victoria
- Belgium:** Agence et Messageries de la Presse, 1 Rue de la Petite-ILE Brussels 7
- Canada:** Davis Circulation Agency, 153 St. Clair Avenue West, Toronto 195, Ontario
- Cyprus:** General Press Agency Ltd, 131 Prodromou Street, P.O. Box 4528, Nicosia
- Denmark:** Dansk Bladdistribution, Hovedvagtsgade 8, Dk. 1103 Kobenhavn.
- Finland:** Rautakirja OY, Kolivuorankuja 2, 01640 Vantaa 64, Finland.
- France:** Dawson-France S.A., B.P.40, F-91121, Palaiseau
- Germany:** W. E. Saarbach GmbH, 5 Koln 1, Follerstrasse 2
- Greece:** Hellenic Distribution Agency, P.O. Box 315, 245 Syngrou Avenue, Nea Smyrni, Greece.
- Holland:** Van Ditar N.V., Oostelijke Handelskade 11, Amsterdam 1004
- India:** International Book House, Indian Mercantile Mansion Ext, Madame Cama Road, Bombay 1
- Iran:** A.D.A., 151 Khaban Soraya, Tehran
- Israel:** Stelmazky's Agency Ltd, Citrus House, P.O. Box 628, Tel Aviv
- Italy:** Intercontinental s.a.s. Via Veracini 9, 20124 Milano
- Japan:** Western Publications Distribution Agency, 170 Nishi-Okubo 4-chome, Shinjuku-Ku, Tokyo 160
- Lebanon:** Levant Distributors Co., P.O. Box 1181, Makdesi Street, Halim Hanna Bldg, Beirut
- Malaysia:** Times Distributors Sdn. Bhd., Times House, 390 Kim Seng Road, Singapore 9, Malaysia.
- Malta:** W. H. Smith Continental Ltd, 18a Scots Street, Valletta
- New Zealand:** Gordon & Gotch (New Zealand) Ltd, 102 Adelaide Road, Wellington 2
- Nigeria:** Daily Times of Nigeria Ltd, 3 Kakawa Street, P.O. Box 139, Lagos
- Norway:** A/S Narvesens Kioskompagni, Bertrand Narvesens vei 2, Oslo 6
- Portugal:** Livaria Bertrand s.a.r.l. Apartado 37, Amadora
- South Africa:** Central News Agency Ltd, P.O. Box 1033, Johannesburg
- Spain:** Comercial Athenium s.a. Consejo de Ciento, 130-136 Barcelona 15
- Sweden:** Wennegren Williams A. B. Fack S-104, 25 Stockholm 30
- Switzerland:** Neville & Cie SA, Rue Levrier 5-7, CH-1211 Geneve 1 Schmidt Agence AG, Savogelstrasse 34, 4002 Basle
- U.S.A.:** John Barrios, IPC Business Press, 205 East 42nd Street, New York, N.Y. 10017

Postage will be paid by Licensee

Do not affix Postage Stamps if posted in Gt Britain, Channel Islands, N Ireland or the Isle of Man

BUSINESS REPLY SERVICE  
Licence No 12045

WIRELESS WORLD  
Reader Enquiry Service  
429 Brighton Road  
South Croydon  
Surrey CR2 9PS

2

Enquiry Service for Professional Readers

WIRELESS WORLD Wireless World, October 1981 WW 170

Please arrange for me to receive further details of the products listed, the appropriate reference numbers of which have been entered in the space provided.

WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW
WW	WW	WW

Name .....

Name of Company .....

Address .....

Telephone Number .....

PUBLISHERS USE ONLY			A/E		
---------------------	--	--	-----	--	--

Position in Company .....

Nature of Company/Business .....

No. of employees at this establishment .....

I wish to subscribe to Wireless World

VALID FOR SIX MONTHS ONLY


## Wireless World: Subscription Order Form

To become a subscriber to Wireless World please complete the reverse side of this form and return it with your remittance to:

**Subscription Manager,**  
**IPC Business Press,**  
**Oakfield House, Perrymount Road,**  
**Haywards Heath, Sussex RH16 3DH,**  
**England**



# The Professional Choice

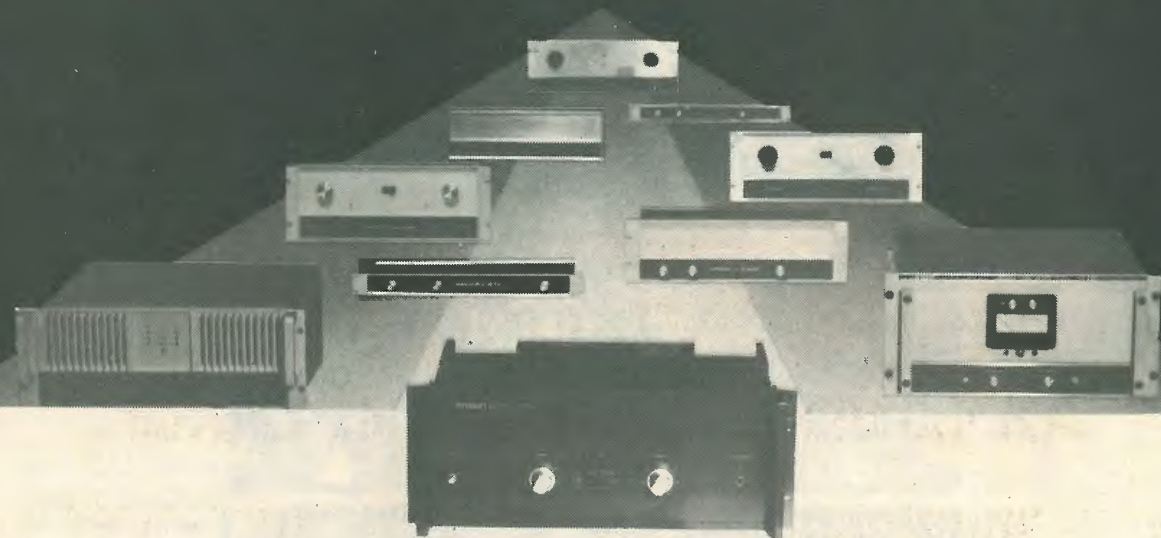

## AMCRON

Since the introduction of the DC300 in 1967, AMCRON amplifiers have been used worldwide — wherever there has been a need for a rugged and reliable amplifier. Their reputation amongst professional users, throughout industry, has made the name of AMCRON synonymous with power amplification. For power you can depend on - choose AMCRON, the professional choice.

For further details contact the UK Industrial distributor:



### G.A.S. ELECTRONICS

16, ST. ALFEGE PASSAGE, LONDON SE10  
TELEPHONE: 01-853 5295  
TELEX: 923393 LASER G

WW - 079 FOR FURTHER DETAILS



The 9908 Universal Counter is the finest counter in the world in its class.

In operation it will help you to provide a better service for all your customers.

That's because it's designed and manufactured to give unrivalled versatility, greater accuracy and a long dependable life.


For all service organizations actively involved with the repair of mobile radios, CB and Open Channel radios, VCRs, teletext colour televisions, and other video systems, the 9908 measures the widest range of frequency and time.

Features include frequency coverage to 1200 MHz, 10mV sensitivity, 0.1 parts per million crystal standard, and a large, 8-digit LED display. You'll also find the 9908 demonstrates the high quality and design integrity on which Racal has built its reputation.

And that's more than a claim because we'll guarantee the whole unit for two years and the LSI chip for a lifetime.

Send off for the facts, and you'll find that when it comes to quality we'll give you all the reasons for specifying the 9908.

## The Ninety-nine hundred and eight gives you every good reason for counting on Racal-Dana.

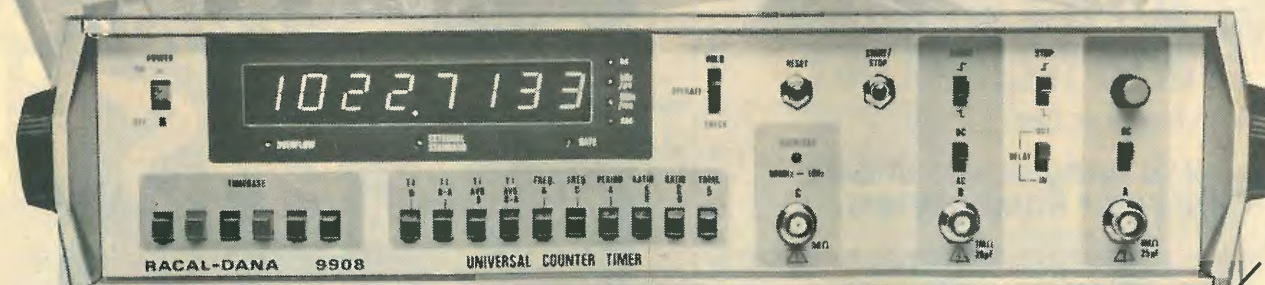

**£495**  
Price applicable to UK only.

WW 10/81

Please give me every good reason for counting on the 9908.

Name \_\_\_\_\_

Company \_\_\_\_\_

Position \_\_\_\_\_

Address \_\_\_\_\_


Tel: \_\_\_\_\_

## RACAL-DANA

Racal-Dana Instruments Limited, Duke Street, Windsor, Berkshire SL4 1SB. Telephone: (07535) 69811 Telex: 847013

Racal-Dana Instruments Limited, Duke Street, Windsor, Berkshire SL4 1SB





Diodes-High Speed Diodes-Zener Diodes Rectifier Bridges-UHF-VHF Tuners



Rectifier Diodes 1A Series 1N 4000 3A Series 1N 5400 and BY 251 High Speed Diodes 1A Series BA 150 and 1P 640 3A Series BY 280 3A Series BY 350 Switching Diodes 01A Series BA 243 - BA 243A Zener Diodes 500mW Series ZPD (2V7 - 51V) 500mW Series BZX55C (5V1 - 62V) 1.3W Series BZX 55C (5V1 - 62V) 1.5W Series BZV97C (7V5 - 200V)

UK DISTRIBUTORS: Fieldtech Heathrow Limited, Hounslow Works, 220, Bath Road, Longford, Middlesex, UB7 0LL, England. Telephone: 01-897 6440 Telex: 23734 FLDTEC G


Fieldtech Heathrow

WW - 083 FOR FURTHER DETAILS

JOYSTICK CONTROLS

We specialise in joystick mechanisms in a very wide range of types and price:

- \* SINGLE, DUAL or TRIPLE AXIS
\* SPRING-CENTRED or DETENT MODES
\* CONTACTLESS, POTENTIOMETER, WAFER SWITCH or MICROSWITCH TYPES
\* AVAILABLE IN THOUSANDS, HUNDREDS, TENS or ONES
\* NO MINIMUM ORDER, NO PROHIBITIVE SMALL QUANTITY PRICES
\* RAPID DELIVERY (usually 1-3 days for samples)
\* SCHEDULED ORDERS OVER 12 MONTHS GAIN FULL DISCOUNTS
\* SPECIALS AND PROTOTYPES IN DAYS, EVEN IN 1 OFF
\* PRICES FROM £1 (TV game types) to £50

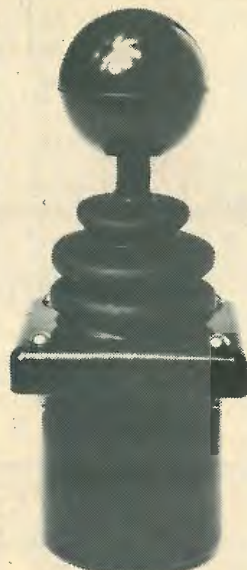

0.6 x actual size

New Contactless inductive dual axis joystick £17.50 less quantity discounts.

DISTRIBUTORS APPOINTED IN: America/Canada, Austria, Holland, Sweden and Comecon Countries. Addresses on request.

Applications invited for distributorships in other countries.

FLIGHT LINK CONTROL LTD. BRISTOW WORKS, BRISTOW ROAD HOUNSLOW, MX. - 01-570 4065

WW - 086 FOR FURTHER DETAILS

COMPUTER WAREHOUSE

NOW OPEN MONDAY-SATURDAY 9.30-5.30

RAM AND EPROM NEW LOW VAT INCLUSIVE PRICES

Table with 4 columns: Part number, Description, Price, and Notes. Includes items like 2716 5v Rail, 4116 200 NS 16KX1 DYN, etc.

In stock now test equipment, microprocessors, teletypes, transformers, power supplies, scopes, sig. gen's, motors, peripheral equipment, I.C.'s, tools, components, variacs, keyboards, transistors, microswitches, V.D.U.'s sub-assemblies + thousands of other stock lines. Just a mere fraction of our vast range, is displayed below: 100's of bargains for callers.

TELETYPE ASR33 I/O TERMINALS



Full fledged industry standard ASR33 data terminal. Many features including: ASCII keyboard and printer for data I/O, auto data detect circuitry, RS232 serial interface, 110 baud, 8 bit paper tape punch and reader for off line data preparation and ridiculously cheap and reliable data storage.

ICL TERMIPRINTER 300 BAUD TERMINALS



Made under licence from the world famous GE Co. The ICL Termiprinter is a small attractive unit with so many features it is impossible to list them in the space available! Brief spec. as follows: RS232 serial interface, switchable baud rates 110, 150, 300, (30 cps), upper and lower case correspondence type face, standard paper, almost silent running, form feed, electronic tab settings, suited for word processor applications plus many more features.

MPU EXPERIMENTORS +5v, 12v, 12v+24v POWER SUPPLY

Once again we are very pleased to offer this superb Power Supply Unit, and hope to satisfy most of our previous customers who were disappointed when we sold out due to demand last time they were advertised!!!


HIGH SPEED DATA MODEMS

A superb piece of engineering made by SE Labs Ltd. to a "no cost spared" spec for the GPO, the Modern 12 is a synchronous Modem for use on DATEL 2412 services, or other data links.

PERTEC

PERTEC TAPE DRIVES 7 track 6840 - 75-25 £175.00 + VAT 9 track 6840 - 9-25 £295.00 + VAT

EQUIPMENT CASES

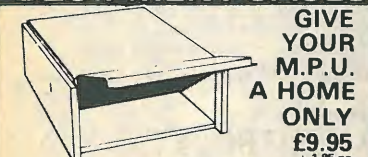

Superb professional fully enclosed, made for the G.P.O. to the highest standard, offered at a fraction of their original cost they feature aluminium sides, hinged removable front panel, which can be secured by 2 screws to prevent prying fingers.

THE PRINTER SCOOP OF THE YEAR THE LOGABAX Z80 MICROPROCESSOR CONTROLLED LX180L MATRIX PRINTER

A massive bulk purchase enables us to offer you this superb professional printer at a fraction of its recent cost of over £2000. Utilising the very latest in microprocessor technology, it features a host of facilities with all electronics on one plug in P.C.B.

EX STOCK SOFTY EPROM BLOWER

Software development system invaluable tool for designers, hobbyists, etc. Enables open heart surgery on 2716, 2708 etc. Blows, copies, reads EPROMS or emulates EPROM/ROM/RAM in situ whilst displaying contents on domestic TV receiver.

9" VIDEO MONITORS

Ex-equipment 9" Motorola Video Monitors 75 Ohm composite input, tested but unguaranteed. £39.99 + £7.50 carriage + VAT. Complete with circuit.

SEMICONDUCTOR 'GRAB BAGS'

Mixed Semis amazing value contents include transistors, digital, linear, I.C.'s, tracs, diodes, bridge res., etc. All devices guaranteed brand new full spec with manufacturers markings, fully guaranteed 50+ bag £2.95 100+ bag £5.15

RCA FULLY CASED ASCII CODED KEYBOARDS

Straight from the U.S.A. made by the world famous R.C.A. Co., the VP600 Series of cased freestanding keyboards meet all requirements of the most exacting user, right down to the price!

VP601 7 bit fully coded output with delayed strobe, etc. £43.95 VP611 Same as VP601 with numeric pad. £54.95

VP606 Serial, RS232, 20MA and TTL output, with 6 selectable Baud Rates. £64.26 VP616 Same as VP606, with numeric pad. £84.34

VP607 7 bit fully coded output with delayed strobe, etc. £43.95 VP617 Same as VP607 with numeric pad. £54.95

5v D.C. POWER SUPPLIES

Following the recent "SELL OUT" demand for our 5v 3 amp P.S.U. we have managed to secure a large quantity of ex-computer systems P.S.U.'s with the following spec: 240 or 110v A.C. input. Outputs of 5v @ 3-4 amps, 7.2v @ 3 amps and 6.5v @ 1 amp.

WE PUT THE KNOWLEDGE INTO TECHNOLOGY

- With features like: -HOW TO CHOOSE AND UPDATE YOUR FIRST HOME SYSTEM. -HOW TO IMPROVE ON YOUR BASIC. -HOW TO SAVE ON MEMORY: More words per byte. -HOW TO PREDICT THE POOLS: Full program and documentation. -HOW TO MASTER THE ATOM: A major programming feature.

You'll find all this and more in October's Computing Today. The magazine that keeps you in touch with personal computing every month. ON SALE NOW 70p



WW - 089 FOR FURTHER DETAILS

QUARTZ CRYSTALS FAST! made to your spec. MOD & CAA APPROVED



WW - 035 FOR FURTHER DETAILS

ANY MAKE-UP OR COPY QUERIES CONTACT BRIAN BANNISTER 01-661 3500 extension 3561

NATIONAL MA1012 LED CLOCK MODULE

★ 12 HOUR ★ ALARM ★ 50/60 HZ The same module as used in most ALARM/CLOCK radios today, the only difference is our price! All electronics are mounted on a PCB measuring only 3" x 1 1/2" and by addition of a few switches and 5/16 volts AC you have a multi function alarm clock at a fraction of cost.

MAINS FILTERS

Professional type mains filters as used by "Main Frame Manufacturers" ideal for curing those annoying hang ups and data glitches, fit one now and cure your problems!

MUFFIN FANS

Keep your equipment Cool and Reliable with our tested ex-equipment "Muffin Fans" almost silent running and easily mounted. Available in two voltages. 110 V.A.C. £5.95 + pp 90p OR 240v A.C. £8.15 + pp 90p DIMENSIONS 4 1/2" x 4 1/2" x 1 1/2"

ELECTRONIC COMPONENTS & EQUIPMENT 66% DISCOUNT

Due to our massive bulk purchasing programme which enables us to bring you the best possible bargains, we have thousands of I.C.'s, Transistors, Relays, Cap's, P.C.B.'s, Sub-assemblies, Switches, etc. etc. surplus to our requirements.

MAJOR SAVINGS HARD DISK DRIVES

Another major purchase allows us to bring you the professional technology of hard disk drives at a price you can now afford. Just imagine absolutely masses of correct data transferred or saved on your system by the time your finger leaves the carriage return key!

DIABLO/DRE series 30. Fully refurbished this 2.5 MB drive accepts 2315 exchangeable (via removing top cover) disk cartridges. Sectoring is a feature of the disk pack and may range from 8-48. Fully DEC RK05, Nova, Texas, system compatible. Requires +5 -15v DC Supply.

DRE 4000 B Series. Model 4044. Technology at its finest, this drive currently manufactured by DRE features 10 MB's of on line storage split into two disk platters. 1, 5 MB fixed and 1 top load 5 MB type 5440 exchangeable cartridge. Features, DC drive motor, built in air conditioning system, write protect, mains powered, etc. Supplied Brand New and Boxed complete with Manual and Rack Slides.

Fully Ampex, Hawk, Wango, Nova compatible. Manufacturers current price £3100, our price £1495 - VAT. \*For DEC compatibility or alternate sectoring please enquire, Xylogics DEC LSI 11 controller for 4 S30 or 2 4000 drives £850 + VAT Newton Labs S100 controller for 4 S30 or 2 4000 £825 + VAT Controller for TRS80, PET, APPLE, price to be announced.

NEW 2315 12 sector disk packs £40 + VAT NEW 5440 any sector packs £48 + VAT ORDER NOW!! These prices may never be repeated. Specialist carriage S30 £15.00 + VAT 4000 £20 + VAT.



Dept. W.W. 64-66 Melfort Rd., Thornton Heath, Croydon, Surrey. Tel: 01-689 7702 or 01-689 6800 MAIL ORDER INFORMATION Unless otherwise stated all prices inclusive of V.A.T. Cash with order. Minimum order value £2.00 Prices and Postage quoted for UK only. Where post and packing not indicated please add 60p per order. Bone Fida account orders minimum £20.00. Export and trade enquiries welcome. Orders despatched same day where possible. 3% surcharge on Access and Barclaycard orders.

WW - 080 FOR FURTHER DETAILS

# LOOKING FOR 5 1/4" WINCHESTERS?

## EP4000 EPROM Programmer/Emulator — Not just a programmer.

Programs a wide range of EPROMs without personality cards. Video output for editing and LED display for stand alone operation. Standard interfaces include RS232C, 20mA, TTL, cassette, printer and DMA. In EMULATION MODE EP4000 replaces your in-circuit PROMs for program development and makes changes, entries, edits simple. Accessories include Bipolar programming modules, multi EPROM simulator adaptors, buffer pods, ERASERS, Monitors, 2764/2564 programming satellite, printer and production gang programmers.

EP4000 programmer/simulator £545.00 P4000 production programmer £545.00 (9 sockets) Eraser £78.00 Monitor £88.00 Printer £395.00

## OASIS 820 — a revolutionary multiperipheral exerciser in a briefcase that tests virtually any computer peripheral.

If you service or maintain a range of computer peripherals OASIS 820 is the cost-effective and logical solution to your control and exercising problems. OASIS 820 uses firmware application Peripheral ALgorithm Modules (PALMs) to configure the keyboard to control various computer peripherals. Each briefcase will hold several PALMs and interface cables so that an engineer can carry, in one hand, all of the peripheral driving which he needs; the cost per function is minimal — the lowest in the industry.

## DYSAN DISKETTES. Indisputably the best you can buy.

30,000 diskettes in stock. As well as the standard range of diskettes for Apple, PET, TRS-80, etc. we also supply pre-formatted for: CPT 8000, Micom/P5002, all IBM, AES/Lanier, Atari, Nexos 2200, Wang, Zenith and P2000. For immediate delivery call our HOTLINE... Weybridge 48346/7

## The Revolutionary New 8" Thinline

Tandon's revolutionary new 8 inch floppy disc drive is only half the thickness of earlier drives so that you can pack twice the storage into the same space. In addition a new method of construction allows the drive to constantly compensate for changes in temperature and humidity so that real capacities of up to 4 M.bytes are now achievable in the usual 8 inch floppy disc drive envelope size. The TM800 series drives require only D.C. power (5v and 24v) so that they run cool and no changing of pulleys and belts is needed for manufacturers who want to ship products abroad.

Our new low profile packaging, designed and built in the U.K., complete with power supplies makes incorporation into, or addition to, existing systems simple.

## APPLE II & TRS-80 COMPATIBLE MINI FLOPPIES

This is our popular TM 100 series mini floppy... Tandon make 40,000 of these a month. Available as bare drives and packaged in single and dual cabinets with power supplies. Capacities from 100K.bytes to 1 Mbyte per drive! Compatible with TRS-80, Video Genie, SUPERBRAIN, Horizon, Zenith, SWTP, Heathkit etc., and supplied as the standard drive with many of these systems.

TRS-80 compatible (in cabinet with power supply)	DUAL UNITS	40 track	£399.00
		80 track	£549.00
	SINGLE UNITS	40 track	£219.00
		80 track	£289.00

APPLE II Compatible	Single disc	£249.00
	Dual disc	£488.00


APPLE Controller board DOS 3.3 £POA

Prices exclude VAT and delivery charges.

## SPARE PARTS SERVICE AND TRAINING

We carry a complete stock of emergency spare parts for Tandon disc drives and we can fix any drive on a short turn-round. All final testing is carried out on an in-house ATE drive testing system which can run 73 separate diagnostic programs to ensure that your drive leaves us in absolutely first class condition. A less complex calibration service is also available. Full product support exists for genuine OEM customers and we run single day training courses at regular intervals. Call our service engineering department for further information.

We carry the full range of Dysan alignment diskettes and a staff of Sales Engineers will be pleased to help you with any queries.

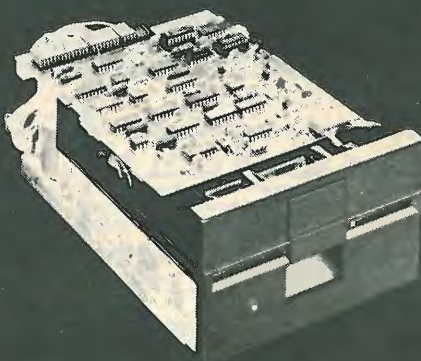

I've got just what you're looking for....

Our new Micro Winchester gives you from 5 to 20 M.bytes of hard disc storage from as little as £1425.00 for a complete ready-to-go, plug-in system with software.

Floppies and larger more expensive hard discs are no match for our new drives which pack enough data to run serious business or technical applications software into a mini-floppy size 5 1/4" unit. Your data is protected in the sealed enclosure making diskette handling problems a thing of the past. The disc is fast — 40 times faster transfer rate than a mini-floppy — yet fits into the same space and so can be used as a replacement or an enhancement.

## Controllerbility

Our controller comes with a range of adaptors to plug on to most popular micros and there are more adaptors on the way. It supports two discs with ease and while others are struggling with less stable analog data separators and speed-eating error correction circuits, we use a high performance digital design which literally locks into the data stream and stays there. Incidentally we also sell digital data separator cards to OEMs. Real time and multi-tasking applications benefit from the controller's interrupt capability and macro level command structure and the OEM version features a simple software interface and CP/M 2.2 BIOS with extensive development aids. The software comes on either 5 1/4" or 8" diskettes together with Boot PROMs.

## Service and Support

If you are impressed with the specifications so far, there is more to come. Our packaged sub-systems are assembled in-house and they carry a full one year parts and labour warranty. Our controllers are built completely from TTL logic — there are no fancy chips — so we can fix them if they ever break down. Dozens of floppy disc drives go through our workshops every month and we are well known within the industry both for our training courses and our heavy investment in computer based disc test equipment. If your Winchester ever stops working you can depend on us to fix it.

For:  
SUPERBRAIN,  
S-100, APPLE II,  
HEATH H89,  
TRS-80.

**HAL Computers Limited**  
57 Woodham Lane New Haw  
Weybridge Surrey KT15 3ND  
Telephone: Weybridge 48346/7

**DEALER  
ENQUIRIES  
INVITED**

# C.T. ELECTRONICS (ACTON) LTD.

Registered in England 1179820

267 & 270 ACTON LANE, LONDON W4 5DG. Telephone: 01-747 1555  
Telex 291429 01-994 6275

9.30 a.m.-6 p.m.  
MON.-SAT.  
CONTINUOUS

## STABILISED POWER SUPPLIES

**FARNELL A15:** 210/240V IP. Dual Op. 12-17v per rail at 100mA. Remote sensing, current limit protection. (164 x 130 x 38mm), with manual. **£12.**  
**FARNELL 7/3SC:** 120/240V IP. Adjustable current limit. Remote sensing. (188 x 96 x 93mm). Two versions available: 15V at 2A or 30V at 1A. **£15 ea.**  
**COUTANT OA2:** Op. amp, psu, 120/240V IP. Dual Op. 12-15v at 100mA. (138 x 80 x 45mm). **£12 ea.** or 2 for **£22.**

**BRANDENBURG** Photomultiplier PSU. 19in. rack mounting. Metered, current limit protection.  
374 300V-1KV at 5mA. 376 660V-1K6V at 10mA.  
375 500V-1K5V at 6mA. All models **£40.**  
Photo multiplier tubes available.

**PIONEER MAGNETICS POWER SUPPLIES.** .5V 150 amp, output, input 115 vac. (Switchmode). Price **£120** each.

**SPECIAL OFFER.** 10MFD 500v ECC 20p ea., 10,000 MFD 16v Mullard 35p ea., 3,300 MFD 40v Mullard 35p ea. 10µF/63v WIMA polyester 10% 40p ea. Large quantities available.

**ELECTROLYTIC CAPACITORS.** Very large stockholding. Mostly ITT EN1212m EN1235 types.

Please send for our electrolytic list, e.g.: 220/50VA, 220/25R, 470/25R, 4700/25A, 470/50A, 2200/100 CAN.

### CAPACITORS-DISC CERAMIC

Over 2 million now in stock, mostly ITT. Many high-voltage types, e.g.:

210p 8KV, 1n 1KV, 2n2 2KV, 10n 2KV.  
220p 1KV, 1n5 3KV, 4n7 1K5V.

Please send for our ceramic capacitor lists.

## 4 MILLION

### I.T.T. ELECTROLYTICS NEW AND BOXED NOW IN STOCK

EN 1212 AXIAL EN 1235 RADIAL

The whole range available at unbeatable prices. Send for List

**PYE HEAD CLEANING CASSETTES.** Brand new or boxed, **50p ea.**

**CASSETTE DECKS:** With stereo heads, mechanically complete, but with no electronics. Smart black modern finish. **£5.00**

We have very large quantities of Disc Ceramics High Voltage, Plate, etc.

Special offer 0.1/16v at **£15/1000.** Please send for our Disc Ceramic Stock Lists.

**PIHER PRESETS**  
Very large stocks, PT10, PT15 enclosed types. Please send for our preset list. Most values 100R-5M

**HEAVY DUTY KEYSWITCHES**

2P-12A 600V AC **£1.50**  
8P 10A 380V AC **£3.00**  
10P 12A 600V AC **£3.00**  
49mm □ Fascia.

We have the following quantities of low profile **GOLD PLATED** I.C. sockets manufactured by Winslow,

discount on quantity. One off prices as follows:

8 PIN-9p; 14 PIN-10p; 16 PIN-11p; 18 PIN-16p; 20 PIN-18p; 22 PIN-22p; 24 PIN-22p; 28 PIN-26p; 40 PIN-30p.

**CANNON** 15w sockets, D type or Souvrian/McMurdo DA15S **60p** ea. Also Cannon 9w plug, brand new, **60p** ea.

**WELWYN STRAIN GAUGE.** (Precision Micro-Measurements). Romulus Michigan type MA-09-500B4-350.

Our price **£1.25** ea. List price **£3.85.** Large quantities available.

3/4" 15 Turn Cermet Trimpot 100kΩ. 1 off price, **20p.** By Beckman & A.B. Full range available.

**REDPOINT HEATSINK,** Type TV4 **15p** ea. 1 off price. Discount on quantity.

We have the following **Welwyn. 1% Resistors** available, 2K, 3K, 10K, 20K, 30K, 1 Meg. Price **25p** ea. Type 4802.

## D TO A CONVERTERS

15MHz, 8 BIT

By Micro Consultants Ltd. 50Ω cable drive op. Linearity 0.25%, max. 0.125% typ. Settling time: 2V step 70nS typ. 2MV step 50nS colour television transmission standard. Diff. gain 0.5% diff. phase shift 0.5° types rad 802 and MC2208/8. Unused. Ex-maker's pack.

**SPECIAL OFFER PRICE: £20**

This advertisement is mainly of our excess stockholding. We also have excellent stocks of semiconductors, hardware, cables, etc. etc. For further details send for our lists and retail price catalogue, phone or visit our shop. All prices are exclusive of VAT (and P&P). Minimum Mail Order **£5 + P&P + VAT.** Government departments, schools, colleges, trade and export welcome. (7479)

### TRANSFORMERS

3-0-3V 100mA.....**£1.06**  
5-0-5V 400mA **£1.25**  
6-0-6V 100mA **£1.14**  
6-0-6V 250mA **£1.16**  
0/6-0/6 280mA **£2.00**  
8-0-8V 400mA **£1.25**  
9-0-9V 75mA **£1.14**  
9-0-9V 3A **£3.00**  
11V 2A, 22V 1A **£2.00**  
12-0-12 50mA **£1.18**  
12-0-12V 100mA **£1.48**  
12V 130mA **£0.80**  
12-0-12V 250mA **£1.94**  
12V 1A5 **£1.25**  
13V + 6.5V Sec 2 Amp **£2.00**  
0-12-0-12 96VA **£8.00**  
15V 100mA **£1.00**  
0/12-0/12 500+500mA **£2.96**  
9-0-9V 1 Amp **£2.64**  
12-0-12V 1 Amp **£3.36**  
15-0-15V 1 Amp **£3.62**  
15V 100mA **£1.00**  
17V 300mA **£1.50**  
30, 24, 20, 15, 12 84 1 Amp **£4.84**  
6.3V 1.5 Amp **£2.64**  
6-0-6V 1.5 Amp **£3.20**  
20-0-20 400mA **£1.80**  
22-0-22 50mA **£1.00**  
24V 100mA **£1.00**  
24V 250mA **£1.50**  
25V + 6.2V Sec 1.6 Amp **£1.90**  
30, 24, 20, 15, 12 2 Amp **£7.96**  
9-0-9V 2 Amp **£4.70**  
12V 2 Amp **£4.84**  
20-0-20V 2 Amp **£6.98**  
30-0-30V 2 Amp **£7.96**  
30V 250mA **£1.50**  
30-25-0-25-30 1A6 **£6.00**  
0-2-4-6-8-10 5A **£6.00**

**4-WAY DPDT AND 5-WAY DPDT DIL SWITCHES,** by ERG Components and CTS. Gold contacts **80p** ea. Brand new and boxed.

**BUZZERS,** 6v and 12v, **50p** ea.

**WIRE ENDED NEONS** **£20/£1,000.**

**SPECIAL OFFER.** Mini-toggle switch by C. & K., 3 Pc/o. Long dolly or short, **50p** ea.

**RESISTORS:** Over 2 million in stock at last count.

**CARBON FILM** 1/4W 5% E12 range 1R0-12M. **2p** ea. **£1/100, £6.50/1,000.**

**METAL OXIDE/FILM:** Most values in E24 range, 1/4-2W 5, 2 or 1%. A few values in 0.1% tolerance available.

**WIRE WOUND:** ORI-100K 3-200W. A selection of mains droppers available. Good selection of metal clad high power types.

**ROTARY SWITCHES**  
Over 30 different types available. **from 45p**  
3-pin Plug. Free hanging **£1.20**

A3F 3-pin Socket. Free hanging with lock **£1.32**  
D3F 3-pin Socket. Female chassis mounting with lock **£1.60**  
D3M 3-pin Socket. Male. Chassis mounting **£1.10**  
10,000µF/100V Electrolytic

Capacitor type 36D by Sprague **£3.50** each. Brand new and boxed.

Switchcraft XLR Connectors always in stock. Discounts on quantity.

**ALUMINIUM BOXES:**  
AB7 134x64x38mm **90p**  
AB8 102x102x38mm **90p**  
AB9 102x57x38mm **90p**  
AB10 102x133x38mm **£1.05**  
AB11 102x64x51mm **90p**  
AB12 76x51x25mm **70p**  
AB13 152x102x51mm **£1.25**  
AB14 178x127x51mm **£1.55**  
AB15 203x152x76mm **£1.90**  
AB16 254x179x76mm **£2.55**  
AB17 254x114x76mm **£2.15**  
AB18 305x127x76mm **£2.40**  
AB19 305x203x76mm **£2.90**

**BLUE REXINE COVERED ALUMINIUM BOXES**  
RB1 152x114x64mm **£1.90**  
RB2 203x127x76mm **£2.35**  
RB3 229x127x89mm **£2.60**  
RB4 279x152x102mm **£3.25**  
RB5 279x190x114mm **£3.80**

**BLACK PLASTIC BOXES**  
75x50x25mm **65p**  
80x60x40mm **92p**  
90x70x40mm **99p**  
115x75x30mm **90p**  
110x90x45mm **£1.18**  
170x100x50mm **£1.65**  
200x120x80mm **£3.55**

**FILTERS**  
3 Phase 20 AM Filters 433V 50/60HZ Phase to Phase 250V AC 50/60HZ Phase to Neutral mfr. by Corcom Chicago Ill., U.S.A., **£15** each. Single Phase Filter 30 Amps 125V 60HZ by Potter **£5.**  
Sprague Filter 2 x 30 Amp 250V AC. 60HZ. **£10.**  
Erie Mains Filters 3 and 5 Amp 250V AC 50HZ **£4.**  
All the above mentioned Filters are brand new. Carriage extra.

**SPECIAL OFFER:** 0.1% TOL resistors. The following values available: 2K, 3K, 10K, 30K, 1MΩ, Welwyn or Filmet. Price **30p** each.

**CERMET PRESETS** 15p ea. **10A 250V AC ILLUMINATED ROCKER SWITCH**  
Red, DP ST 26x30mm rect. Snap-in type **75p**

**16A 250V AC ILLUMINATED ROCKER SWITCH**  
(Amber). 14x30mm rectangular snap-in type. SPST **30p**

**LICON ILLUMINATED SWITCHES**  
01-800 Rectangular Snap-in Series.  
2PCO Latching **£1.50**  
2PCO Momentary **£1.50**  
Indicator only **50p**  
Lenses available in red or white only.

**WIREWOUND POTS**  
IRO-100K by A.B., Colvern, etc. 1 1/2W 40p, 3W 60p, 5W 80p.  
**TRIMPOTS**  
10R-500K 10/20 turn. 1 1/4in. or 3/4in. rectangular **60p** ea.

# Put your finger on the Electronics industry



Dial Industry will need no introduction to advertisers who had the sense to book into volume 1, covering mechanical engineering. Now's your opportunity to book into the next volume in the series which covers the huge growth industry of electronics. Like its companion volume, it takes you to no less than 40,000 UK buyers.

The Dial Industry series is a new concept in industrial directories. It is specially designed for buyers across British Industry - and the advertisers who need to reach them. Simple and easy to use, it will act as your salesman all the year round. Just look at the sectors which receive in-depth coverage in this latest publication. And remember, your advertising will reach top buyers and specifiers in all of them.

**ELECTRICAL, ELECTRONIC • COMPUTER & DATA PROCESSING • MEASURING, ANALYSING & CONTROLLING INSTRUMENTS • WATCHES, CLOCKS AND PHOTOGRAPHIC EQUIPMENT AND JEWELLERY**

How does Dial Industry work? Just like a classified telephone directory - only better! It lists firms and offices along with addresses, postal codes, STD codes and telephone numbers. Entries are classified by products and services. But - unlike a telephone directory - Dial Industry is circulated to named individuals, carefully selected because they are your potential customers.


**IPC BUSINESS PRESS INFORMATION SERVICES LTD**

**abcp** ASSOCIATION OF BRITISH DIRECTORY OF PUBLISHERS

**EUROPEAN ASSOCIATION OF DIRECTORY PUBLISHERS**

Dial Industry, IPC Business Press Information Services Ltd., Windsor Court, East Grinstead House, East Grinstead, West Sussex RH19 1XA.

## DIAL INDUSTRY

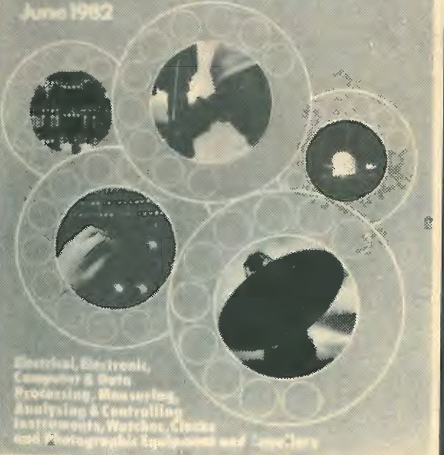

**HERE'S HOW TO REACH 40,000 UK BUYERS IN A GROWTH MARKET**

Ring Malcolm Charnock or Clive Foskett on 0342 26972 or use the coupon.



Please send me details of how to advertise in Dial Industry  (tick as appropriate)  
Please send me details of how to qualify to receive Dial Industry

NAME .....  
(please print)  
POSITION .....  
COMPANY .....  
ADDRESS .....  
TELEPHONE NO. ....





TELEPRINTER MODELS (5 UNIT CODE)

T1000 - RECEIVE ONLY  
 T1080 - KEYBOARD SEND/RECEIVE  
 T1000 - WITH MAGNETIC TAPE MEMORY  
 T1000 - AUTOMATIC SEND/RECEIVE WITH PAPER TAPE ATTACHMENTS  
 T1000 CA - WITH BUILT IN ENCRYPTING FACILITY  
 T1000 V - SPECIAL ENVIRONMENT  
 PT80-5 RANGE-BASED ON THE PT80, WITH EITHER NEEDLE OR INK-JET MATRIX PRINTING

DATA PRINTERS (5 UNIT CODE)

PT80 - RECEIVE ONLY, NEEDLE OR INK-JET MATRIX  
 PT80 - KEYBOARD SEND/RECEIVE, NEEDLE OR INK-JET MATRIX  
 PT80 - AUTOMATIC SEND/RECEIVE WITH PAPER TAPE ATTACHMENTS  
 PT80H - NEEDLE MATRIX PRINTER FOR TICKETS AND STANDARD FORMS  
 PT801 - HIGH-SPEED INK-JET PRINTER RECEIVE ONLY  
 PT801 - HIGH-SPEED INK-JET PRINTER KEYBOARD SEND/RECEIVE

AN EXTENSIVE INTERFACE VARIATION IS AVAILABLE ON ALL PRINTERS LISTED ABOVE, AND WITH MANY DIFFERENT CHARACTER SETS.

COMING SOON

THE T1000 S TELEPRINTER - INK JET, DAISY WHEEL OR NEEDLE MATRIX PRINTING. WITH PAPER TAPE OR FLOPPY DISK ATTACHMENT AND RETROFIT VDU. DUAL LANGUAGE CAPABILITY.


## A quiet word...

The characteristics of an ideal printer, whether it be for use as a teleprinter or a printer terminal might be stated as an efficient, quiet machine that can produce high quality text on plain paper in clear, indelible script.

Siemens' Model 1000 teleprinter and the versatile PT80 series printer terminals possess these attributes and many more. Indeed they are designed to satisfy a variety of today's text and communication requirements.

### Teleprinters and Data printers for the office

The conventional teleprinter, has been greatly refined over the years but some machines still need frequent maintenance checks and are too noisy for use in an open office. However, Siemens' development of printing mechanisms has allowed the noise producing parts to be reduced. This, together with the introduction of advanced electronic techniques have been built into the Model 1000 teleprinter.

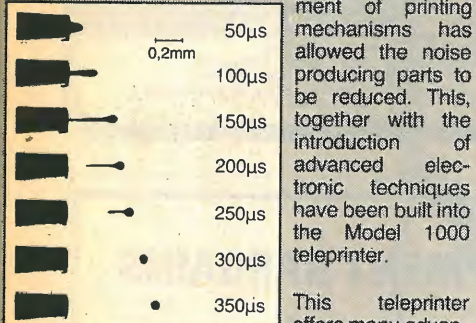

This teleprinter offers many advantages over more conventionally styled teleprinters, the most significant features being quietness of operation and the extensive use of electronics to replace mechanical parts. The Model 1000 is so quiet it can be used in an open office, eliminating the necessity for a separate telex room housing a 'chattering' teleprinter.


The use of electronics also greatly reduces the need for preventive maintenance and regular periodic checks and, furthermore, makes for a smaller, more economical, easier-to-use machine. A prominent feature of the Model 1000 is the easily replaceable daisy wheel, and typewriter style red and black ribbon.

### Variants for different purposes

Siemens Model 1000 teleprinters are made in a number of variants. For example, receive-only versions, with paper tape attachments, and magnetic tape memories for bulk message storage and editing are available. For use in special environments there is a Model 1000 V designed for military type applications.

### Model 1000 S

The teleprinter Model 1000 S is an exciting new development using the latest technological advances. The versatility of the Model 1000 S is illustrated by the fact that it will produce both latin and non-latin script and switch between them when required e.g. Arabic, Greek, Cyrillic, Hangul or Farsi. The Model 1000 S is available with either a daisy-wheel, a needle-printer head, or an ink-jet. Optional items include a visual display unit and floppy disk message store.

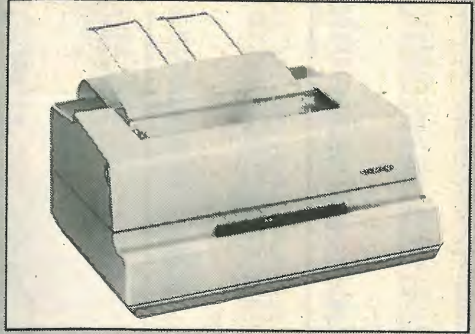

### Security - a growing problem

Industry, commerce, Government departments, and large international concerns and institutions frequently have a communications security requirement. The Model 1000 CA (Cryptographical Application) gives the message originator and recipient protection from any electronic 'eavesdropping'. This is done by encyphering and decyphering the message through a built-in cryptographic device. This machine has been designed to be compatible with all standard telegraph circuit options.

### PT80 - a concept for today

The PT80 printer terminals are a result of many years' operational experience in both text and data communications. In essence, these machines are electronic terminals suited to a wide range of communications and data networks as well as process control.

The PT80 printer terminal uses either a 12 needle printing head for refined print quality, or alternatively the Siemens revolutionary ink-jet mechanism to achieve the ideal particularly in respect of minimal noise. The PT80 uses the ink-jet principle to attain a printing speed of up to 270 characters per second. The principle is featured very simply in the illustration on this page, with the droplet being ejected by means of a shockwave which causes a momentary increase in pressure in the nozzle.

What happens immediately afterwards in front of the nozzle orifice is shown in our illustration. The shockwave in the nozzle is generated by a piezo-electric transducer to which a voltage is momentarily applied. Siemens has ensured that ink is ejected only as and when needed.

### Versatility

As with Siemens' Model 1000 teleprinters a number of PT80 variants are available to suit specific requirements. For example, there are receive-only machines with needle or ink-jet printing, a teleprinter (PT80-5) and a variant with paper tape attachments for automatic send/receiver. There is also a wide variety of character sets and an extensive range of interface modules to suit most telecommunications and data peripheral requirements.

### PT80-H

Also available is the PT80-H, designed to print airline-style tickets, multi-part forms and continuous pre-printed stationery. This machine has the ability to recognise the validity of each ticket by series and type and adjust the print format accordingly. It can also be fitted with an integral guillotine, so that forms can be cut to size as they are used.


### Easy servicing

Again, as with the Model 1000 teleprinter, these printer terminals are based on the modular design concept. For example, plug-in modules of the PT80i enable a fast and therefore economical service support.

### Operational flexibility

PT80 machines generally operate with seven-bit codes or alternatively the PT80-5 teleprinter variant uses the five-bit code. The standard terminals are suitable for operating at speeds of up to 600 baud, the teleprinter variant at up to 200 baud, and the PT80i up to 4800 baud. All the PT80 terminals satisfy the requirements for a flexible character set.

Notwithstanding their advanced specification, the PT80 range of printer terminals is compact and simple to use and along with the Model 1000 teleprinters they are perfect examples of 'quiet words from Siemens'.

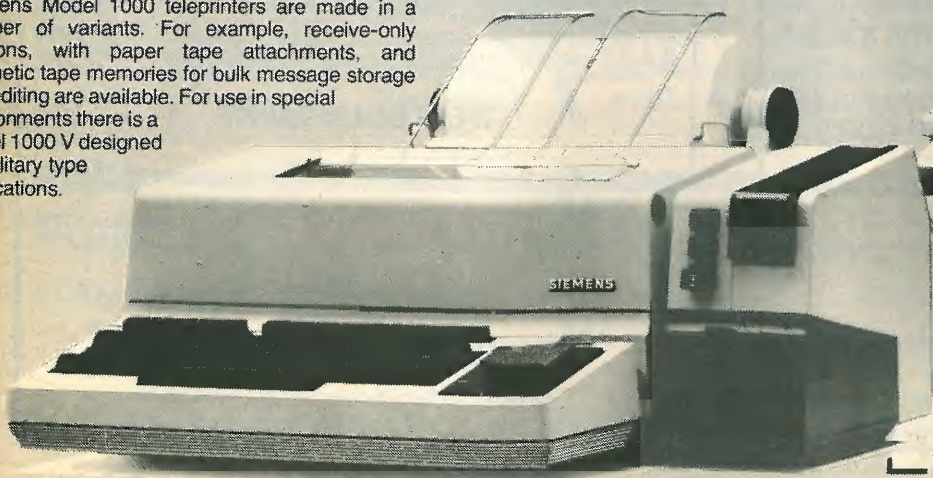

For full information, cut out the coupon and send to Marketing Services Dept., Siemens Ltd., Siemens House, Windmill Rd. Sunbury-on-Thames, Middlesex TW6 7HS. Or telephone Sunbury-on-Thames (09327) 85691. Tx. 8951091.

Name \_\_\_\_\_  
 Position \_\_\_\_\_  
 Company \_\_\_\_\_  
 Address \_\_\_\_\_

WW

# MICRO TIMES

19 Mill St., Bideford, North Devon EX39 2JR  
England  
Telephone: Bideford (023-72) 79798

It is our policy to offer you brand new, full-spec. devices. Prices subject to change without notice. Schools, Univ. Official Orders welcome.

**ORDERING INFORMATION**  
Please add 50p P&P. Plus 15% VAT to all orders.  
**EXPORT ORDERS** ACCEPTED. Add 15% P&P on total order. VAT not applicable. ACCESS/BARCLAY-CARD WELCOME.



## VEROBLOC SOLDERLESS BREADBOARD

360 reliable contacts. Will accommodate any size IC. Can be full interlocked one with another. £3.55 each  
S100 Prototyping Boards: Microboard Pattern 06-2175L £16.40 Sq. Pad Universal Pattern £16.40 Prototyping Board for your APPLE/ITT 2020 £8.37

## 6809 SINGLE BOARD COMPUTER ★KIT★

Complete kit £175 + 15% VAT + £1 P&P. Uses Motorola's powerful MC 6809 CPU. 4K/8K/16K ROM 2K RAM. ACIA, PIA, 8080 simulated I/O, RS-232 Handshake. 8 sel. Baud Rates. Manual includes: 11x17in. Schematic Parts List. User notes. Software listings and more!  
Bare Board £48★★  
Uses 6809, 6850, 6821 - Buy set for £18.50.  
ADMONS (2716) £24.00  
Data available. SAE please.

### INTRODUCING CMOS AND TTL

CMOS	74LS	LINEAR ICs	VOLTAGE REGULATORS	THYRISTORS
4001 12p	74LS00 14p	NE555 17p	1A 7805 5V 53p	TILs
4002 12p	74LS01 14p	NE566 48p	7812 12V 53p	TIL 32 45p
4006 88p	74LS02 13p	RC4136 85p	7815 12V 53p	TIL209 red 18p
4007 13p	74LS03 13p	LM301AN 26p	7905 5V 58p	TIL232 green 18p
4008 60p	74LS04 14p	LM311P 45p	7912 12V 58p	TIL212 yellow 18p
4010 36p	74LS08 13p	LM316 £1.45	100mA 78L05 5V 29p	TIL216 red 18p
4011 12p	74LS10 13p	LM324N 42p	78L12 12V 29p	TIL228 red 20p
4012 18p	74LS14 50p	LM339N 40p	500mA 79M12 12V 52p	TIL220 red 12p
4013 33p	74LS20 13p	LM348N 75p	79M05 5V 62p	TIL224 yellow 18p
4014 40p	74LS26 18p	LM358P 38p	723 28p	TIL311 £5.50
4015 62p	74LS30 14p	LM380 65p	UA709 28p	TIL312/3 £1.00
4016 28p	74LS32 14p	LM3900N 45p	UA741 15p	TIL321/A £1.15
4017 53p	74LS38 16p	LM3914 £2.00	UA733 68p	TIL330A £1.15
4018 58p	74LS42 39p	LM3915 £2.00	UA747 58p	
4019 36p	74LS47 41p	LM13600 £1.20	UA748 26p	
4020 65p	74LS73 21p	LM13600 £1.20	UL700 15p	
4023 18p	74LS74 18p	LM741 15p	UL700 15p	
4024 38p	74LS75 29p	UA733 68p	UL700 15p	
4025 14p	74LS86 36p	UA747 58p	UL700 15p	
4026 £1.25	74LS90 35p	UA748 26p	UL700 15p	
4027 35p	74LS93 38p	UL700 15p	UL700 15p	
4028 62p	74LS107 40p	UL700 15p	UL700 15p	
4029 70p	74LS112 70p	UL700 15p	UL700 15p	
4030 48p	74LS123 46p	UL700 15p	UL700 15p	
4031 £1.95	74LS125 29p	UL700 15p	UL700 15p	
4040 66p	74LS132 50p	UL700 15p	UL700 15p	
4042 55p	74LS138 39p	UL700 15p	UL700 15p	
4044 60p	74LS151 75p	UL700 15p	UL700 15p	
4046 74p	74LS155 48p	UL700 15p	UL700 15p	
4047 78p	74LS157 35p	UL700 15p	UL700 15p	
4048 44p	74LS161 42p	UL700 15p	UL700 15p	
4049 27p	74LS163 42p	UL700 15p	UL700 15p	
4050 27p	74LS164 50p	UL700 15p	UL700 15p	
4051 60p	74LS173 75p	UL700 15p	UL700 15p	
4052 60p	74LS174 77p	UL700 15p	UL700 15p	
4056 £1.50	74LS175 59p	UL700 15p	UL700 15p	
4060 86p	74LS221 63p	UL700 15p	UL700 15p	
4063 £1.18	74LS244 83p	UL700 15p	UL700 15p	
4066 36p	74LS245 £1.20	UL700 15p	UL700 15p	
4068 18p	74LS251 45p	UL700 15p	UL700 15p	
4069 15p	74LS257 55p	UL700 15p	UL700 15p	
4070 22p	74LS261 £3.10	UL700 15p	UL700 15p	
4071 18p	74LS366 38p	UL700 15p	UL700 15p	
4075 20p	74LS373 78p	UL700 15p	UL700 15p	
4077 22p	74LS374 78p	UL700 15p	UL700 15p	
4078 20p	74LS393 60p	UL700 15p	UL700 15p	
4081 18p		UL700 15p	UL700 15p	
4083 42p		UL700 15p	UL700 15p	
4503 65p		UL700 15p	UL700 15p	
4510 66p		UL700 15p	UL700 15p	
4511 51p		UL700 15p	UL700 15p	
4518 70p		UL700 15p	UL700 15p	
4520 £2.20		UL700 15p	UL700 15p	
4572 30p		UL700 15p	UL700 15p	

CMOS	74LS	LINEAR ICs	VOLTAGE REGULATORS	THYRISTORS
4001 12p	74LS00 14p	NE555 17p	1A 7805 5V 53p	TILs
4002 12p	74LS01 14p	NE566 48p	7812 12V 53p	TIL 32 45p
4006 88p	74LS02 13p	RC4136 85p	7815 12V 53p	TIL209 red 18p
4007 13p	74LS03 13p	LM301AN 26p	7905 5V 58p	TIL232 green 18p
4008 60p	74LS04 14p	LM311P 45p	7912 12V 58p	TIL212 yellow 18p
4010 36p	74LS08 13p	LM316 £1.45	100mA 78L05 5V 29p	TIL216 red 18p
4011 12p	74LS10 13p	LM324N 42p	78L12 12V 29p	TIL228 red 20p
4012 18p	74LS14 50p	LM339N 40p	500mA 79M12 12V 52p	TIL220 red 12p
4013 33p	74LS20 13p	LM348N 75p	79M05 5V 62p	TIL224 yellow 18p
4014 40p	74LS26 18p	LM358P 38p	723 28p	TIL311 £5.50
4015 62p	74LS30 14p	LM380 65p	UA709 28p	TIL312/3 £1.00
4016 28p	74LS32 14p	LM3900N 45p	UA741 15p	TIL321/A £1.15
4017 53p	74LS38 16p	LM3914 £2.00	UA733 68p	TIL330A £1.15
4018 58p	74LS42 39p	LM3915 £2.00	UA747 58p	
4019 36p	74LS47 41p	LM13600 £1.20	UA748 26p	
4020 65p	74LS73 21p	LM13600 £1.20	UL700 15p	
4023 18p	74LS74 18p	LM741 15p	UL700 15p	
4024 38p	74LS75 29p	UA733 68p	UL700 15p	
4025 14p	74LS86 36p	UA747 58p	UL700 15p	
4026 £1.25	74LS90 35p	UA748 26p	UL700 15p	
4027 35p	74LS93 38p	UL700 15p	UL700 15p	
4028 62p	74LS107 40p	UL700 15p	UL700 15p	
4029 70p	74LS112 70p	UL700 15p	UL700 15p	
4030 48p	74LS123 46p	UL700 15p	UL700 15p	
4031 £1.95	74LS125 29p	UL700 15p	UL700 15p	
4040 66p	74LS132 50p	UL700 15p	UL700 15p	
4042 55p	74LS138 39p	UL700 15p	UL700 15p	
4044 60p	74LS151 75p	UL700 15p	UL700 15p	
4046 74p	74LS155 48p	UL700 15p	UL700 15p	
4047 78p	74LS157 35p	UL700 15p	UL700 15p	
4048 44p	74LS161 42p	UL700 15p	UL700 15p	
4049 27p	74LS163 42p	UL700 15p	UL700 15p	
4050 27p	74LS164 50p	UL700 15p	UL700 15p	
4051 60p	74LS173 75p	UL700 15p	UL700 15p	
4052 60p	74LS174 77p	UL700 15p	UL700 15p	
4056 £1.50	74LS175 59p	UL700 15p	UL700 15p	
4060 86p	74LS221 63p	UL700 15p	UL700 15p	
4063 £1.18	74LS244 83p	UL700 15p	UL700 15p	
4066 36p	74LS245 £1.20	UL700 15p	UL700 15p	
4068 18p	74LS251 45p	UL700 15p	UL700 15p	
4069 15p	74LS257 55p	UL700 15p	UL700 15p	
4070 22p	74LS261 £3.10	UL700 15p	UL700 15p	
4071 18p	74LS366 38p	UL700 15p	UL700 15p	
4075 20p	74LS373 78p	UL700 15p	UL700 15p	
4077 22p	74LS374 78p	UL700 15p	UL700 15p	
4078 20p	74LS393 60p	UL700 15p	UL700 15p	
4081 18p		UL700 15p	UL700 15p	
4083 42p		UL700 15p	UL700 15p	
4503 65p		UL700 15p	UL700 15p	
4510 66p		UL700 15p	UL700 15p	
4511 51p		UL700 15p	UL700 15p	
4518 70p		UL700 15p	UL700 15p	
4520 £2.20		UL700 15p	UL700 15p	
4572 30p		UL700 15p	UL700 15p	

CMOS	74LS	LINEAR ICs	VOLTAGE REGULATORS	THYRISTORS
4001 12p	74LS00 14p	NE555 17p	1A 7805 5V 53p	TILs
4002 12p	74LS01 14p	NE566 48p	7812 12V 53p	TIL 32 45p
4006 88p	74LS02 13p	RC4136 85p	7815 12V 53p	TIL209 red 18p
4007 13p	74LS03 13p	LM301AN 26p	7905 5V 58p	TIL232 green 18p
4008 60p	74LS04 14p	LM311P 45p	7912 12V 58p	TIL212 yellow 18p
4010 36p	74LS08 13p	LM316 £1.45	100mA 78L05 5V 29p	TIL216 red 18p
4011 12p	74LS10 13p	LM324N 42p	78L12 12V 29p	TIL228 red 20p
4012 18p	74LS14 50p	LM339N 40p	500mA 79M12 12V 52p	TIL220 red 12p
4013 33p	74LS20 13p	LM348N 75p	79M05 5V 62p	TIL224 yellow 18p
4014 40p	74LS26 18p	LM358P 38p	723 28p	TIL311 £5.50
4015 62p	74LS30 14p	LM380 65p	UA709 28p	TIL312/3 £1.00
4016 28p	74LS32 14p	LM3900N 45p	UA741 15p	TIL321/A £1.15
4017 53p	74LS38 16p	LM3914 £2.00	UA733 68p	TIL330A £1.15
4018 58p	74LS42 39p	LM3915 £2.00	UA747 58p	
4019 36p	74LS47 41p	LM13600 £1.20	UA748 26p	
4020 65p	74LS73 21p	LM13600 £1.20	UL700 15p	
4023 18p	74LS74 18p	LM741 15p	UL700 15p	
4024 38p	74LS75 29p	UA733 68p	UL700 15p	
4025 14p	74LS86 36p	UA747 58p	UL700 15p	
4026 £1.25	74LS90 35p	UA748 26p	UL700 15p	
4027 35p	74LS93 38p	UL700 15p	UL700 15p	
4028 62p	74LS107 40p	UL700 15p	UL700 15p	
4029 70p	74LS112 70p	UL700 15p	UL700 15p	
4030 48p	74LS123 46p	UL700 15p	UL700 15p	
4031 £1.95	74LS125 29p	UL700 15p	UL700 15p	
4040 66p	74LS132 50p	UL700 15p	UL700 15p	
4042 55p	74LS138 39p	UL700 15p	UL700 15p	
4044 60p	74LS151 75p	UL700 15p	UL700 15p	
4046 74p	74LS155 48p	UL700 15p	UL700 15p	
4047 78p	74LS157 35p	UL700 15p	UL700 15p	
4048 44p	74LS161 42p	UL700 15p	UL700 15p	
4049 27p	74LS163 42p	UL700 15p	UL700 15p	
4050 27p	74LS164 50p	UL700 15p	UL700 15p	
4051 60p	74LS173 75p	UL700 15p	UL700 15p	
4052 60p	74LS174 77p	UL700 15p	UL700 15p	
4056 £1.50	74LS175 59p	UL700 15p	UL700 15p	
4060 86p	74LS221 63p	UL700 15p	UL700 15p	
4063 £1.18	74LS244 83p	UL700 15p	UL700 15p	
4066 36p	74LS245 £1.20	UL700 15p	UL700 15p	
4068 18p	74LS251 45p	UL700 15p	UL700 15p	
4069 15p	74LS257 55p	UL700 15p	UL700 15p	
4070 22p	74LS261 £3.10	UL700 15p	UL700 15p	
4071 18p	74LS366 38p	UL700 15p	UL700 15p	
4075 20p	74LS373 78p	UL700 15p	UL700 15p	
4077 22p	74LS374 78p	UL700 15p	UL700 15p	
4078 20p	74LS393 60p	UL700 15p	UL700 15p	
4081 18p		UL700 15p		

# Appointments

Advertisements accepted up to 12 noon Monday, September 28 for November issue, subject to space being available.

DISPLAYED APPOINTMENTS VACANT: £13.50 per single col. centimetre (min. 3cm).  
 LINE advertisements (run on): £2.50 per line, minimum 5 lines. (Prepayable).  
 BOX NUMBERS: £1.50 extra. (Replies should be addressed to the Box Number in the advertisement, c/o Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.)  
 PHONE: OPHELIA SMITH, 01-661 3033 (DIRECT LINE)

Cheques and Postal Orders payable to IPC Business Press Ltd.

## Electronics R&D

£8,589

Join us in the forefront  
of technology

## HF-VHF-UHF and Microwave

A challenging and full career in  
Government Service

Candidates, normally aged under 30, should have a good honours degree or equivalent in a relevant subject, but any candidates about to graduate may be considered.

Appointments as Higher Scientific Officer (£6,530-£8,589) or Scientific Officer (£5,176-£6,964) according to qualifications and experience. Promotion prospects.

Please apply for an application form to the Recruitment Officer (Dept W.W.20.9) H M Government Communications Centre, Hanslope Park, Milton Keynes MK19 7BH.

### Engineering Manager-Communications £10,000 p.a. + car

#### The Job

We are an international, long-established company recognised as market leaders in industrial security systems.

Due to expansion we now seek an Engineering Manager for our Radio Communications Network whose prime responsibility would be to ensure the efficient functioning of the Radio Network and support systems. Other duties would include on and off the job training which would include attending training seminars.

#### The Requirements

You would need an HNC (Electrical/Electronic level or equivalent) and have a comprehensive knowledge of radio systems (Pye experience preferred). You should also be aware of new developments within radio communications technology. You would need to be available to travel throughout the UK and should ideally be aged between 25-40 although exceptional candidates outside that bracket would be considered.

#### The Benefits

This is an excellent opportunity to join a fast-expanding division with first class company benefits, which include relocation assistance where appropriate, excellent sickness and pension schemes, travelling expenses and company car.

If you are interested, please apply in writing, in the first instance, to: Mr. R.K. Davies  
 Securicor Ltd (Communications Division)  
 24 Gillingham Street, London SW1V 1HZ

(1331)



### DEVELOPMENT/TEST ENGINEER BROADCAST TELEVISION

Croma Research Ltd is a young company associated with an established manufacturer of broadcast equipment. We now require a Development Test Engineer to work on our range of high quality colour monitors.

You will probably be aged 24 to 26 but most certainly must be qualified to HND/degree level and have a minimum of three years' relevant experience. You must be prepared to be involved initially in test work which could include the formulation of test procedures. As the company grows you will become involved full time in development of monitors and other TV broadcast equipment.

Salary offered will be very competitive. We are situated in an attractive part of north Hampshire within easy reach of several other major towns.

Please either request an application form or send us a full c.v. addressed to our personnel consultant, M. D. Comber, at his private office -

9A High Street, Andover, Hants SP10 1LJ. Tel: 0264-64495

(1328)

## Broadcast Studio Equipment Installation and Service Engineers Go places with Rank Cintel.


If you are a qualified engineer, experienced in capital electronics, there is a world of opportunities awaiting you at Rank Cintel.

Cintel telecine equipment is used throughout the world by television production and broadcasting companies. Following a 3-6 month product training period, you can expect to be working out of the UK for up to 6 months of the year, assignments taking anything from a couple of days to two months or more.

As well as the necessary practical experience, therefore, you should be a resilient self-starter able to respond to the daily challenge of this highly rewarding position.

An earning potential in the region of £12K per annum including overseas premium can be anticipated. Future prospects are excellent as you would expect from an internationally recognised leader in high technology systems.

Applications in the first instance to Ian Waterhouse, Divisional Personnel Manager.



## RANK CINTEL

Rank Cintel, Watton Road, Ware, Hertfordshire SG12 0AE. Telephone: Ware 3939.

(1340)

### AUDIO ENGINEERS

We are a leading supplier of Audio Equipment to the Broadcasting Industry, ranging from high-quality amplifiers to complete television studio communications systems. Due to company expansion we now have vacancies for the following positions:

#### PROJECT ENGINEER c. £8000

We require an engineer to undertake the detailed design of projects utilising the company's standard building blocks. This involves all aspects of work from customer liaison through to handbook preparation. The ideal candidate would be qualified to at least H.N.D. and have experience of the professional Audio Industry.

#### ASSISTANT ENGINEER Salary Neg.

This position is suitable to the less experienced engineer, who will, initially, work under supervision in the projects department.

#### TEST ENGINEER c. £6000

Responsible for testing and faultfinding our complete range of equipment. A good working knowledge of audio circuitry is more important than formal qualifications although an H.N.C. or equivalent would be an advantage.

For an application form, please apply to Alan Giles at:

**PHILIP DRAKE ELECTRONICS**

23 REDAN PLACE, LONDON, W2 4SA

PHONE: 01-221 1476

(1337)

**IRAM** a Franco-German Institute for Radioastronomy at mm-wave-lengths based in Grenoble (France) is interested in employing an:

## ELECTRONICS ENGINEER

with experience in design and construction of digital frequency synthesis circuitry involving phase-lock techniques

Candidates with relevant experience should request an application form and return it before October 13, 1981, to:

**IRAM**

Administration

Boite Postale 391

38017 GRENOBLE CEDEX

France

Reference VC/16/LW

(1344)

# Electronics Design

Using State-of-the-Art Technology  
Up to £14,000 p.a.

Multitone is an international company engaged in radio paging and associated communications equipment. Rapidly expanding, not only in size but also into new technological areas, we now require additional high-calibre design expertise at all levels.

We'd like to talk to Engineers with expertise in any of the following areas:

1. R.F. Receiver Design
2. Custom I.C.S./Hybrids

We'll tell you how the right people can earn up to £14,000 p.a. We'll explain how there are openings at our London Head quarters. We'll also outline the additional advantages on offer to those who join us in London including flexible working hours and the possibility of local authority housing.

Why not telephone our Personnel Department direct, or write to them at the address below.

**Multitone Electronics P.L.C.,**  
6-28, Underwood Street,  
London, N1 7JT.  
Tel: 01-253 7611.



**multitone**

## APPOINTMENTS IN ELECTRONICS to £15,000

MESSAGE SWITCH  
DATA COMMS-TELEMETRY  
TELEGRAPHY-RF COMMS

Interesting and varied opportunities, U.K. and overseas. For immediate action on salary and career advancement, contact:

**Technomark**  
Engineering and Technical Recruitment  
11, Westbourne Grove  
London W2. 01-229 9239 (1297)

## THE ROYAL FREE HOSPITAL Hampstead

### MEDICAL PHYSICS TECHNICIAN GRADE III

For the maintenance of the Academic Department of Surgery's electronic equipment and to carry out developmental research in the field of biophysical monitoring.

An electronics HNC/HND or degree and at least three years' working experience are necessary.

Salary on scale: £5750-£7277 p.a. inclusive (pay award and London Weighting increase pending).

Application form and job description from the Personnel Department, Royal Free Hospital, Pond Street, London NW3. Tel: 01-794 0500 ext. 4286. Please quote ref. 1919.

Closing date - 9th October, 1981. (1329)

## TOP JOBS IN ELECTRONICS

Posts in Computers, Medical, Comms, etc. ONC to Ph.D. Free service.

Phone: 01-906 0251 (8994)

## RECESSION - BOTTOMING OUT?

We don't know the answer, but we do know those with specialist experience get paid very well.

Current vacancies include:

**RF RECEIVER DESIGNERS.** To create a new generation of radio-paging equipment which operates up to 900MHz. Exceptional opportunity. To £14,000. London.

**PRINCIPAL ENGINEER - ELECTRO-OPTICS.** For research on novel fibre optic signal processing. Salary good but confidential. Hants.

**SYSTEMS ENGINEER.** To design TV systems for mobile and static studios. Must have a broad-based engineering approach - knowledge of video, audio, TV and power supply technology. To £10,000. Berks.

**DESIGN ENGINEER** for mini computers and associated peripherals. Three years' design experience Schottkey logic and bit slice processors. To £9,000. Herts.

**TECHNICIANS.** HNC level for complex development on RF and microwave communications equipment including digital controls. To £8,500. Berks.

**PRINCIPAL AND SENIOR ENGINEERS** for design on multiprocessor-based data acquisition and medical diagnostic imaging equipment. Good degree and experience in advanced logic design. To £13,000. Herts.

For further details, contact:

**Charles Airey Associates**

13/16 Jacob's Well Mews, George Street, London W1H 5PD. Tel: 01-486 9607. (1332)

## FIELD MAINTENANCE ENGINEER

Juliana's Sound Services Ltd. are the world leaders in the supply of high quality discotheque sound and lighting systems to International hotel companies. Due to expansion, a vacancy exists for a highly competent, resourceful electronics engineer who will have total responsibility for the first-class maintenance of discotheque installations in Europe, Middle East and Scandinavia.

Based in London, the position necessitates extensive foreign travel for a great deal of the year. The successful candidate will most probably be under 30 years old and single.

Remuneration will be at least £10,000 p.a. plus company car and profit sharing.

Please apply, in writing, to David Payne, Managing Director, Juliana's Sound Services Ltd, 7 Kensington Church Court, London W8 4SP.

(1355)

# SULTANATE OF OMAN VTR MAINTENANCE ENGINEER VACANCIES

Oman TV has a number of vacancies for experienced VTR maintenance engineers to work on Ampex videotape recording machines.

Applicants should be qualified to HNC level or equivalent and have not less than six years' maintenance experience on Ampex videotape recording machines with particular reference to the VR 1200B. Experience on 1" "C" format would be advantageous.

Salaries, which are paid in rials Omani, are fully remittable and tax-free and range from £1,100 to £1,300 sterling per month upwards.

Married accommodation is provided together with free air passage at beginning and end of contract for family. Air tickets are also provided for leave after the first year of service.

Applicants should write stating age, nationality, qualifications and full details of experience to:

**Ministry of Information and Youth Affairs, Post Box 600, Muscat, Sultanate of Oman,** marking the envelope "Technical Office" in top left-hand corner.

(1334)

**IRAM** a Franco-German Institute for Radioastronomy at mm-wave-lengths based in Grenoble (France) is interested in employing an:

## ELECTRONICS ENGINEER

with experience in design and construction of microwave phase-lock loops and phase drift monitoring systems of high accuracy

Candidates with relevant experience should request an application form and return it before October 23, 1981, to:

**IRAM**  
Administration  
Boite Postale 391  
38017 GRENOBLE CEDEX  
France  
Reference VC/17/LW

(1345)

# LABORATORY ENGINEERS/TECHNICIANS

BBC Engineering Designs Department requires Laboratory Engineers/Technicians, male or female, in Central London premises to assist engineers in the development, construction and testing of sound and television broadcasting equipment.

**LABORATORY TECHNICIANS**, who will probably be in their 20's will have a keen interest and a minimum of two years' practical experience of electronics. They will have at least ONC or C. & G. Part 2 or equivalent. Salary according to qualifications and experience in the range £5074-£5982 p.a. More experienced technicians may be appointed to a salary scale in the range of £6094-£6569 p.a.

**LABORATORY ENGINEERS**, will have had several years' experience of electronic development work and will have an appropriate Degree or HNC, Higher T.E.C. or C. & G. Full Technological Certificate in Telecommunications or Electrical Technicians (271 or 281). Salary in the range £6954-£7509 progressing to £9882. Pensionable posts. Re-location expenses considered.

Requests for application form to **The Engineering Recruitment Officer, BBC, Broadcasting House, London, W1A 1AA.** quoting reference 81.E.4034/WW. For further information please contact **Mr. I. Millar** on 580-4468 Ext. 4593.



(1323)

# Develop your potential in our future



Founded in 1936, Marconi Instruments today employs some 2,000 people in the design, development, production and marketing of its advanced communications test equipment and A.T.E.

To meet the challenges of tomorrow's markets, we need more electronics designers and technicians. And to turn new ideas into fully operational equipment we need production and service personnel as well.

If you would like to develop your potential in the exciting future of Europe's leading test equipment specialist, complete the coupon and send it to us at the address below:-

## marconi instruments

Return this coupon to John Prodger, Marconi Instruments Limited, Freeport, St. Albans, Hertfordshire, AL4 0BR. Telephone: St. Albans 59292  
A GEC-Marconi Electronics Company

Name \_\_\_\_\_ Age \_\_\_\_\_  
Address \_\_\_\_\_  
Telephone Work/Home (if convenient) \_\_\_\_\_

Years of experience	<input type="checkbox"/> 0-1	<input type="checkbox"/> 1-3	<input type="checkbox"/> 3-6	<input type="checkbox"/> Over 6
Present salary	<input type="checkbox"/> £4000-5000	<input type="checkbox"/> 5000-6000	<input type="checkbox"/> 6000-7000	<input type="checkbox"/> Over 7000
Qualifications	<input type="checkbox"/> None	<input type="checkbox"/> C&G	<input type="checkbox"/> HNC	<input type="checkbox"/> Degree

Present Job \_\_\_\_\_

### POOLE GENERAL HOSPITAL

LONGFLEET ROAD  
POOLE, DORSET, BH15 2JB

## SENIOR ELECTRONICS TECHNICIAN

required. The duties will include providing a repair and maintenance service for a wide range of electro-medical equipment with the East Dorset Health District. Applicants should have a broad practical experience in the maintenance of electronic equipment and in fault finding, and should possess either O.N.C./H.N.C. or C. & G. Full Technicians Certificate in Electronics. Salary on the scale £5223-£6750 p.a. (back-dated pay award pending). Hours of duty 37 per Monday to Friday working week plus "on-call" commitment when required.

Application form and job description from Sector Personnel Officer by September 30.

(1350)

### ELECTRONIC SERVICE ENGINEERS

Negotiable Salary + Expenses + Company Car + Pension  
Age 27-35

Fast expanding Company seeks two Engineers based in locations West of London and West Midlands for installation and service of a variety of equipment used in hospitals, universities and research establishments.

Applicants should be conscientious, willing to travel and ideally experienced in analogue, digital and control circuitry. Interest and aptitude in computer servicing is also desirable.

These skills will be required to work with radioisotope diagnostic scanning equipment and related data processors, automatic sample changers and nucleonic counting and monitoring equipment.

Qualification to HNC level is desirable but demonstrated ability and relevant experience will be taken into account.

**TSL**

TRACERLAB SERVICES LTD.  
Prodorite House, Lion Road, TWICKENHAM, Middx. TW1 4ZF

For further details and application form please apply to:- Mrs. Janet Kirby  
Tel: 01-891 4881

(1351)

### ACRON VIDEO

Due to continued expansion at our modern premises in Bracknell, an additional

## QUALITY CONTROL ENGINEER

is required to handle all aspects of check-out and inspection including goods inwards. Applicants will probably be aged between 25-30 years, ONC level with preferably 5 years' experience in a QC environment. Some knowledge of professional broadcast TV equipment is desirable.

Applications should be addressed to Mr. R. Browning, Acron Video, Unit 3, Lovelace Road, Bracknell RG12 4YT. Tel: Bracknell 55625.

(1131)

### THE RANK PHICON VIDEO GROUP

has a vacancy for a fully experienced

## CHIEF ENGINEER

within their Commercial/Industrial video duplication facility.

Applicants should have maintenance experience in 2" + 1" V.P.Rs Rank Citadel Mark III T/K and ancillary video equipment. Excellent terms and conditions. For additional information contact Nick Watkins on 01-580 7161.

**AUDIO & VIDEO LTD**  
48 Charlotte Street, London W1  
01-580 7161

(1354)



## ALWAYS AHEAD WITH THE BEST!

£5,000-£15,000

PDP 11: NOVA: ECLIPSE: Z80: 8080: 6800: BIT-SLICE: TTL: ECL: RADAR: SONAR: SATCOM: Phototypesetters: Wordprocessors: Flight Simulators: ATE: Electro-Medical: Teletext: Data-Comms: Automation: Microwave?

Where does your skill and interest lie - Design? Test? Service? Software? Consultancy? or perhaps Research?

- \* Our clients are drawn from all sectors of industry:
- \* There are opportunities for Managers, Project Managers, Engineers and Technicians.
- \* Most UK locations and some Overseas.
- \* Make your first call count - Contact MIKE GERNAT or PETER BROWN on 076 384 676/7

**ELECTRONIC COMPUTER AND MANAGEMENT APPOINTMENTS LIMITED**  
148-150 High St., Barkway, Royston, Herts SG8 8EG.

(usually until 8 p.m.)

(1338)

### ROYAL MILITARY COLLEGE OF SCIENCE SHRIVENHAM, SWINDON, WILTSHIRE

DEPARTMENT OF ELECTRICAL AND ELECTRONIC ENGINEERING

#### INTEGRATED MILLIMETRE WAVE ANTENNAS AND COMPONENTS

Applications are invited for a research post to carry out interesting experimental and development work on a new range of millimetre wave integrated antennas and circuits. The post is sponsored for an initial period of two years with a possible extension to a third year. Applicants must possess a good honours degree or equivalent qualification in Physics, Engineering or Mathematics and have the ability to carry out experimental work. The post offers an ideal opportunity to gain experience in a new and expanding field with an active research group; study for a higher degree will be encouraged.

The successful candidate will be appointed at the grade of Research Scientist or Higher Research Scientist depending upon qualifications and experience.

Salary scales: Research Scientist £4,809-£6,480; Higher Research Scientist (minimum of two years' postgraduate experience) £6,075-£7,999 (scales currently under review).

Accommodation for a single person may be available in a Hall of Residence and there is a possibility of housing for a married candidate.

Application forms and further information may be obtained from the Civilian Admin. Office, Royal Military College of Science, Shrivenham, Swindon, Wilts. SN6 8LA. Telephone (0793) 782551 Ext. 421. Please quote reference HQ 120/1/81. Closing date for applications 8 October, 1981.

(1321)

## ELECTRONICS TECHNICIAN/ PRODUCTION/TEST

LINTECH INSTRUMENTS LTD. manufactures and sells worldwide electron beam equipment to the semiconductor industry. Our Scanning Electron Beam Annealer is used in IC manufacture. Our Sampling SEM systems are used in VLSI circuit testing. We are the leading world supplier of installed systems.

A small company, looking forward to expansion, we urgently need an electronics technician with energy, who aims for management in the medium term. Qualifications to HNC at least. Age from 25 to 35.

Initial responsibilities

- prototype/production assembly and test of fast pulse, linear and high voltage electronics (some P.C. layout work)
- joint responsibility for system commissioning and final test
- co-ordination of component stores and purchasing. Opportunity for international travel will occur.

Apply with curriculum vitae to Dr. G. S. Plows, Lintech Instruments Ltd., Cambridge Science Park, Cambridge CB4 4BN.

(1318)



## SALES ENGINEER ELECTRO-MEDICAL

E.M.S. is the leading British manufacturer of electro-medical equipment for physical medicine. We need an additional engineer to be solely responsible for sales and service of all E.M.S. equipment to Hospitals and Clinics in the Midlands.

This is a new position and offers exciting prospects for a sales engineer, aged 30-35, who lives in the Birmingham area, and who is able and willing to work from home. The successful applicant (male or female) will ideally have relevant experience in selling and servicing hospital equipment.

The position is a challenge to an engineer to be entirely responsible for all sales and service in the Midlands.

Great opportunity to build up a well-established market. Initial training at our factory in Oxfordshire. Salary and commission. Car provided. Full curriculum vitae to:

The Managing Director  
**ELECTRO-MEDICAL SUPPLIES (Greenham) LTD.**  
Wantage, Oxfordshire OX12 7AD

(1324)



## CAPITAL APPOINTMENTS LTD.

### THE UK's No. 1 ELECTRONICS AGENCY

Design, Development and Test to £14,000

Ask for Brian Cornwell

SALES to £15,000 plus car

Ask for Maurice Wayne

FIELD SERVICE to £12,000 plus car

Ask for Paul Wallis

We have vacancies in ALL AREAS of the U.K.

Ask for a Free Jobs List

Telephone: 01-637 5551 (3 lines)

(291)

SITUATIONS VACANT

# ELECTRONICS PERSONNEL

SALES - SERVICE - TEST  
DESIGN - RESEARCH

A specialist employment agency in the heart of Southern England's golden triangle is just waiting to interface you, the career-minded person, with prospective new employers.

To find out how we can help why not give us a call at our office in Eton.

130 High Street Eton Windsor SL4 6AR Windsor 59252

(1269)

Professional & Executive Recruitment

Berkshire-based company in advanced electronic systems for defence and professional use have openings for talented graduate Engineers

**Digital £9/12K**  
Systems and Design Engineers to work on satellite communication systems.

**Microwave £9/12K**  
Microwave and R.F. systems and design engineers.

**Analogue Video £10K+**  
To work on state of the art video teleconference systems and broadcast TV projects.

**Digital TV £9/10K**  
Working at the forefront of development in TV picture processing - telematics etc.

Phone or send CV to:  
**B. Brennan, PER,**  
Sun Alliance House  
Oxford Road, Reading RG1 7LU  
(0734) 58936  
(After hours 589341)

(1314)

Applications are welcome from both men and women



B.B.C.

## ELECTRONIC ENGINEERS

The B.B.C. requires experienced Electronic Engineers to maintain Videotape equipment in its West London premises. These staff work a seven-day fortnight shift pattern.

In addition to possessing a degree in Electrical Engineering, Electronics, or Applied Physics, H.N.C./H.N.D. (Electrical) or City and Guilds full Technological certificate in Telecommunications, applicants, male or female, must have a thorough understanding of Television Broadcasting systems and be experienced in the maintenance of Videotape equipment.

The starting salary is between £8,359 and £9,042 (including a shift allowance).

For further details and application forms, please ring Ray Bell, 01-743 8000, Extension 2308.

(1309)

DIGITAL EXPERIENCE?

FIELD SUPPORT  
R & D AND SALES  
VACANCIES IN COMPUTERS,  
NC, COMMS., MEDICAL  
VIDEO, ETC.

For free registration ring  
0453 883264  
01-290 0267



ELECTRONICS RECRUITMENT SERVICE  
LOGEX HOUSE, BURLEIGH, STROUD  
GLOUCESTERSHIRE GL5 2PW  
Tel. 0453 883264, 01-290 0267

(321)

ZIMBABWE

A suitably-qualified person(s) is needed to supervise the installation of an electrical wiring system in a school for returned-refugees in rural Zimbabwe. He/she will also be involved in teaching students while the construction is taking place.

Terms: Two year contracts, return fare to the U.K., equipment allowance before leaving, mid-term grant and a resettlement grant on termination of the contract, medical insurance, intensive language training and orientation. All CIR overseas personnel earn salaries which relate to local rates.

Write to: CIR Overseas Section, 1 Cambridge Terrace, London, NW1 1, for further information sending full details of your previous experience. Please quote ref. WW

(1273)

UNIVERSITY COLLEGE LONDON

## ELECTRONICS TECHNICIAN

required to assist in the construction, modification and maintenance of electronic equipment for use in teaching and research carried out in the Psychology Department. The work is varied and interesting and covers a wide range of analogue and digital techniques. H.N.C., C. & G. or equivalent. Salary range £6711 to £7666 inclusive of London Weighting.

Application form from Personnel Officer (Technical Staff CK5), University College London, Gower Street, London WC1E 6BT.

(1310)

**R & D OPPORTUNITIES.** Senior level vacancies for Communications Hardware and Software Engineers, based in West Sussex. Competitive salaries offered. Please ring David Bird at Rediffusion Radio Systems on 01-874 7281.

(1162)



Television Automation Ltd.

## TELEVISION ENGINEER

We are a rapidly expanding television company with an established market place and have the need of a full time engineer. In addition to a practical knowledge of normal broadcast procedures and requirements, the successful candidate should have a working experience of lightweight broadcast cameras, both portable and editing 'C' format and BVU VTRs, computer controlled editing systems, Cintel telicine and various support equipment.

Duties will include the planning and implementation of regular maintenance schedules plus maintaining the technical standard of in-house facilities.

A sense of responsibility and the ability to work unsupervised is essential. It will also be necessary to work flexible hours.

The salary offered will be in keeping with the calibre of person we require.

Initial application to Sheila Clare,  
Television Automation Limited, 16-18 Grape Street, London WC2.

01-240 5515

(1308)

## TECHNICIAN

Grade 6 (salary scale £6532-£7802 p.a.)

required to provide wide-ranging electronic support; maintain and repair sophisticated and complex equipment; design, construct and commission equipment, etc.

Applications stating qualifications, age and present salary, and giving the names and addresses of two referees to the Administrator, Department of Metallurgy and Science of Materials, Parks Road, Oxford OX1 3PH.

(1322)

**A COMMISSION** based arrangement sought with representative calling upon Electrical/Electronic product manufacturers. McDeane Electricals Ltd, 198 Station Parade, London W5. Telephone 01-992 8976. (1342)

## BOX NOS.

Box number replies should be addressed to:

Box No.....  
c/o Wireless World  
Quadrant House  
The Quadrant  
Sutton  
Surrey SM2 5AS

ARTICLES FOR SALE

**GEC SLNTHISED** type receiver RC/411/R for reception modes AM CW SSB tunes in 100Hz steps locked to frequency standard over range 15KHz to 31MHz in 31 bands, digital read out, continuous interpolation between 100Hz steps, high quality receiver, table mounting, requires some attention, full literature and circuit diagrams available, transistorised, £200. **MARCONI RECEIVER H2301**, closely similar to Eddystone 850/2, high stability 500KHz to 30.5Mc/s in 30 switched 1MHz ranges. AM, CW and SSB double conversion crystal control, first oscillator, dial calibration linear and accurate to 1KHz, high quality receiver in full working order, manuals available, valves £350. Buyer collects, Kings-ton upon Thames, Telephone 01-942 1230. (1312)

SITUATIONS VACANT

# Senior Quality Assurance Engineer

Slough

Sony products are amongst the most sophisticated available. Our advanced technology keeps us ahead of the field in domestic and industrial audio visual equipment. But although we're proud of our products, we're equally proud of our people, because it is to them that we owe our continued success. We therefore take great care of our staff and do everything possible to help them enjoy their work and receive the best rewards.

Currently, we are seeking to recruit a senior Quality Assurance Engineer to lead a small team of engineers in this vital department. Ideally, we are looking for someone who has had at least five years experience as an engineer working on fault finding, with a City and Guilds radio/TV qualification, plus colour endorsement.

We can offer you a secure future with ample scope for advancement, plus an excellent salary together with the benefits one would expect of a large successful company.

If you feel you have the necessary qualifications we would be delighted to hear from you. Please write giving full details of your career to date, to Miss Linda Burke, Personnel Officer, Sony (UK) Limited, Pyrene House, Sunbury on Thames, Middlesex TW16 7AT.

(1357)



ARTICLES FOR SALE

### THE SCIENTIFIC WIRE COMPANY

P.O. Box 30, London, E.4

ENAMELLED COPPER WIRE				
SWG	1lb.	8oz.	4oz.	2oz.
8 to 29	2.76	1.50	.80	.60
30 to 34	3.20	1.80	.90	.70
35 to 40	3.40	2.00	1.10	.80
41 to 43	4.75	2.60	1.20	1.42
47	8.37	5.32	3.19	2.50
48 to 49	15.96	9.58	6.38	3.69

SILVER PLATED COPPER WIRE				
14 to 30	6.50	3.75	2.20	1.40

TINNED COPPER WIRE				
14 to 30	3.38	2.36	1.34	.90

Prices include P&P, VAT and Wire Data SAE for list. Dealer enquiries welcome. Reg Office: 22 Coningsby Gardens. (9063)

**JAPANESE COMPONENTS:** C495 60p. C1306 90p. C1307 88p. C1923 25p. C1957 50p. IS34 6p. IS953 6p. ISV50 f1. TA7205 f1.80. TA7310 f1.80. plus 30p postage and package. Bitz, PO Box 64, Nottingham.

**ENCAPSULATING**, coils, transformers, components, degassing, silicone rubber, resin, epoxy. Lost wax casting for brass, bronze, silver, etc. Impregnating coils, transformers, components. Vacuum equipment low cost, used and new. Also for CRT regunning metalising. Research & Development. Barratts, Mayo Road, Croydon. CR0 2QP. 01-684 9917. (9678)

**MARCONI TF 995 B/Z**, mint condition. Marconi TF 2011 late model. Also other test equipment. Phone 0582-425721/414717. (1220)

**PRE-PACKED** screws, nuts, washers, solder tags, studding. Send for price list. AI Sales (WW), PO Box 402, London SW6 6LU. (1253)

**A/C H.F. Tx Rx Systems** for sale. £125 per complete system. Also television cameras with remote control facility £125 each plus VAT. Telephone Henfield (079 155) 2237, 2099. (1333)

**WESTMINSTERS** 6 channel Pye W15 AMS complete with installation kit, first-class condition, for sale in lots of 10, £800 per lot. For appointment to view contact: E.S.M. on 01-697 0604. (1327)

**HEWLETT PACKARD 1707B** Dual Trace Oscilloscope DC-75MHz, 10 MV-5V, mixed/delayed sweep 2 probes, service manual, £330 ono, buyer collects. Tel: Tadley 3375. (1315)

**HAVE YOU SEEN THE GREEN LIST?** 1000s of components (radio, audio, CB and electronic) and electronic items and accessories at unbelievably low prices, something for everyone. Send 30p for list and receive FREE RECORD SPEED INDICATOR.

**MYERS (Dept. W.W.)**  
14-16 Clifton Grove, Harehills, Leeds 9

(1167)

ARTICLES FOR SALE

## THE ART OF ELECTRONICS

by Horowitz & Hill

Price £13.50

**THE PPL SYNTHESIZER COOK-BOOK**, by H. Kinley Price: £5.25  
**THE MC6809 COOKBOOK**, by C. D. Warren Price: £5.00  
**DIGITAL ICS... HOW THEY WORK AND HOW TO USE THEM**, by A. W. Barber Price: £5.75  
**ELECTRONIC DESIGN WITH OFF THE SHELF INTEGRATED CIRCUITS**, by Z. H. Meiksin Price: £6.25

**EXPERIMENTER'S GUIDE TO SOLID STATE ELECTRONICS PROJECTS**, by A. W. Barber Price: £5.50

**COMPLETE GUIDE TO READING SCHEMATIC DIAGRAMS**, by J. Douglas-Young Price: £5.50

**PRACTICAL SOLID STATE CIRCUIT DESIGN**, by J. E. Oleksy Price: £6.50

**WORLD RADIO/T.V. HANDBOOK**, by J. M. Frost Price: £10.50

**1981 THE RADIO AMATEUR'S HANDBOOK**, by A.R.R.L. Price: £8.00

ALL PRICES INCLUDE POSTAGE

THE MODERN BOOK CO.

Specialist in Scientific & Technical Books

19-21 PRAED STREET LONDON W2 1NP

Phone 402-9176

Closed Sat. 1 p.m.

(8974)

## DO YOU TRANSMIT AUDIO SIGNALS OVER CABLE CIRCUITS?

We manufacture a full range of interface equipment for transmission of audio signals over private wire of telephone circuits, from Narrow Band STD systems (300Hz-3.4kHz) up to Wide Band Music Circuits.

PARTRIDGE ELECTRONICS

(A. C. Partridge Ltd.)

56 Fleet Road, Benfleet, Essex

Tel: (STD 03745) 3256

We also manufacture audio mixers and sub-assemblies

(3143)

## WANTED

Test equipment, receivers, valves, transmitters, components, cable and electronic scrap, any quantity. Prompt service and cash. Member of A.R.R.A.

M & B RADIO

86 Bishopsgate Street

Leeds LS1 4BB

0532-35649

RYDER ORGAN SYSTEM

The WW classical design for full-size keyboards, including couplers. Expanded range of p.c. boards & data available includes chorus, vibrato, combination stop control. Reversion. A new compact solid-state unit gives smooth natural sound. Demo cassette, on loan, deposit £1.50, refund £1.00 (Prices UK only).

**HIYKON LTD. (.)**, Woodside Croft, Ladybridge Lane, Bolton BL1 5ED

(1213)

ARTICLES FOR SALE

ELECTRONIC CLEARANCE PACKS

Containing Transistors, Capacitors, Pots, Switches, Radio and Audio Items, Connectors, Relays and Electronic Devices, etc. Must be worth over £20 per pack. Our price £5 each £1.75. JUMBO PACK. Must be worth over £50. Our price £10 each £2.50. Money back if not delighted.

HAVE YOU SEEN THE GREEN CAT?

1000s of Components, Audio, Radio and Electronic, CB. Everything electronic at unbelievably low prices. Something for everyone. Send 35p P.O./Cheque and receive FREE RECORD SPEED INDICATOR.

MYERS, Dept. W.W., 12 Harper Street, Leeds, LS2 7EA - Tel: 452045

(1348)

TO MANUFACTURERS, WHOLESALERS & BULK BUYERS ONLY

Large quantities of Radio, T.V. and Electronic Components. RESISTORS CARBON & C/F 1/8, 1/4, 1/2, 1. 1 Watt from 1 ohm to 10 meg. RESISTORS WIREWOUND. 1 1/2, 2, 3, 5, 10, 14, 25 Watt. CAPACITORS. Silver mica, Polystyrene, Polyester, Disc Ceramics, Metalamite, C280, etc. Convergence Pots, Slider Pots, Electrolytic condensers, Can Types, Axial, Radial, etc.

Transformers, chokes, hopts, tuners, speakers, cables, screened wires, connecting wires, screws, nuts, transistors, ICs, Diodes, etc., etc. All at Knockout prices. Come and pay us a visit. Telephone 445 2713, 445 0749.

BROADFIELDS & MAYCO DISPOSALS

21 Lodge Lane, N. Finchley, London, N.12. 5 mins. from Tally Ho Corner (9461)

RACAL COMMUNICATIONS RECEIVERS. 500kc/s 30mc/s in 30 bands 1MHz wide. RA17 £150. RA17L £200. Or a few as new £250. RA117E £300. All air tested, supplied with full manual, dust covers, in fair condition, new metal louvered case for sets £25. RA98A SSB-SSB adaptors, new and boxed with manual £75. RA96D used with manual, £75. RA218 SSB-SSB adaptors and fine tune units for RA117 £65.

MARCONI SIGNAL GENERATOR TF801D/1 TO BS E85 to £150. MARCONI R.F. RADIATION & POWER METER. OA1430 (C7477), as new, in grey metal case with full manual, power meter FX range, 10mc/s to 10gc/s, complete with X-S-L band aerials, £50.


FERROGRAPH TAPE RECORDERS SERIES 4-5-6 and 7 - Mono and stereo. Series 4 to £6 £10 to £20 ea. Series 7 £100 to £200 ea. Collected.

EXTEL TRANSEL MATRIX PRINTERS. 5 level Baudot Code. Accepts speeds up to 300 bauds. Supplied set to 50 and 75 bauds switched. Tested with manual, £165.

All items are bought direct from H.M. Government, being surplus expt. Price is ex-works. S.A.E. all enquiries. Phone for appointment for demonstration of any item. JOHNS RADIO, WHITEHALL WORKS, 84 WHITEHALL ROAD, BIRKENSHAW, BRADFORD. TEL. BRADFORD 684007 (9.30 a.m.-1 p.m.). (848)

INVERTERS

High quality DC-AC. Also "no break" (2ms) static switch, 19" rack. Auto Charger.



COMPUTER POWER SYSTEMS Interport Mains-Store Ltd. POB 51, London W11 3BZ Tel: 01-727 7042 or 0225 310916 (9101)

PRINTED CIRCUITS. Make your own simply, cheaply and quickly! Golden rototak Light Sensitive Lacquer - now greatly improved and very much faster. Aerosol cans with full instructions, £2.25. Developer 35p. Ferric Chloride 55p. Clear Acetate sheet for master 14p. Copper-clad fibre-glass board approx. 1mm thick £1.75 sq. ft. Post/Packing 60. - White House Electronics, Castle Drive, Praa Sands, Penzance, Cornwall. (714)

2 TEKTRONIX 555 Double Beam beam scopes, 1 fully working, 1 for spares. With service manual, £200. Mr L. Berry. Tel: 061-969 1699, after 6 pm. (1347)

Avantek GPD 400 series modular amplifiers ex-stock sale

SPECIFICATIONS

Table with columns for Frequency, Gain, NF, Reverse Isolation, Output power, VDC, Storage Temperature, and Range.

For further information contact Jackie Casparly 11-15 Betterton Street, London, WC2H 9BS. Telephone: 01-836 1228. Telex: 28752

NEW LOWER PRICES GPD 401 £9.00 each for 1-99 off GPD 402 £8.50 each for 1-99 off GPD 403 £9.75 each for 1-99 off (While stocks last)

CONSTRUCTION Thin Film circuits Cascadable amplifier modules TO-12 package Avantek in-house transistors

APPLICATIONS RF & IF stages in Receivers Preamplifiers, cable drivers, gain elements in multichannel systems and RF distribution networks. RF feedback loops Isolation & buffer stages



TELETEX, TV SPARES & TEST EQUIPMENT. Teletext adaptors. Latest external unit kit incl. Mul-lard Decoder 6101VML and infra-red remote control £238, p/p £2.80 (ruther details on request). Also MK1 external unit kit incl. Texas XM11 decoder and cable remote control, special offer price £158 p/p £2.80. Both kits incl. UHF modulator, and plug into TV set aerial socket. SPECIAL OFFER TEXAS XM11 Decoder, new and tested, limited quantity at 1/3 price, £60 p/p £1.40. NEW SAW FILTER IF AMP PLUS TUNER (complete & tested for sound & vision), £28.50, p/p £1.20. COLOUR BAR & CROSS HATCH GENERATOR KIT (MK4) PAL, UHF aerial input type, eight vertical colour bars, R-Y, B-Y, grey scale, etc. P/B controls £35. Batt holders £1.50 or stab. mains power supply kit £4.80. Deluxe case £5.20 or alum. case £2.90, p/p £1.40. Built & tested on Deluxe case (battery) £58, (mains) £70, p/p £1.80. CROSS HATCH KIT UHF aerial input type also gives peak white & black levels, batt. op. £11, p/p 45p. Add-on GREY SCALE KIT £2.90 p/p 35p. Deluxe case £5.20. UHF SIGNAL STRENGTH METER KIT £17.50. Alum. case £1.80. Deluxe case £5.20, p/p £1.40. CRT TEST & REACTIVATOR KIT for colour & mono £24.40, p/p £1.80. COLOUR PANELS, large selection of surplus & tested panels for popular makes, part-ex in shop. TV SOUND IF TRANSIST. Tested, £6.80, p/p 85p. VARICAP UHF TUNERS. Mul-lard U321 £6.80, ELC1043/06 £6.80, ELC1043/05 £5.50, G.I. £3.50. Salv. (asstd) £1.50, p/p 60p. Varicap UHF/VHF ELC2000S £8.50. Bush (dual) £7.50, p/p 70p. TOUCH TUNE CONTROL units. Bush (6 pos) £4.50, p/p 80p. VARICAP CONTROL UNITS 3 pos. £1.20, 4 pos. £1.50, 5 pos. £1.80, 6 pos. £1.80, p/p 45p. UHF transt. Tuners, 4 pos. or 6 pos. push button £4.20, p/p £1.40. (Special types available on request.) Large selection of LOPTS, Trippers, Scancolls, Mains Droppers, and other spares for popular makes of colour and mono receivers - MANOR SUPPLIES, 172 WEST END LANE, WEST HAMPSTEAD, LONDON, N.W.6. SHOP PREMISES. Tel. 01-794 8751, 794 7346. Near W. Hampstead Jubilee Tube & Brit. Rail N. London (Richmond-Broad St.) and St. Pancras-Bedford. Buses 28, 159. Callers welcome. Thousands of additional items not normally advertised available at shop premises. Open all week incl. Saturday (Thursday half day). MAIL ORDER: 64 GOLDERS MANOR DRIVE, LONDON NW11 9HT. PLEASE ADD 15% VAT to all prices. (60)

AIRMEC 248A Wave Analyser 5-300MHz, £85. PARAMETRON 477 H.F. COMM. Spectrum Analyser 200KHz-50MHz, £495. SYSTRON DONNER 751B Spectrum Analyser 10MHz-6GHz, £725. B & K 2603 Microphone Amplifier 100uV-100V, £75. H.P. 350D Attenuator DC-1MHz, £100. H.P. 355C VHF Attenuator 0-12dB, 50 Ohm. DC-1000MHz, £75. TEXSCAN RA.104 Rotary Attenuator 0-100dB £75. KROHN HITE 330B 0.02Hz-2KHz Band Pass Filter, £55. GEN-RAD 1607A Transfer Function & Immittance Bridge 25-1500KHz, £350. MARCONI TF.868B Universal Bridge ±1%, £175. MARCONI TF.2700 Universal Bridge ±1%, £230. WAYNE KERR B.541C Auto-balance Capacitance Bridge, £115. WAYNE KERR B.601 R.F. Bridge 15KHz-5MHz 1%, £95. WAYNE KERR B801/R261/D261 VHF Admittance Bridge & Source & Detector. £175. H.P. 5245L/5253B 8 Digit Counter DC-500MHz, £350. RACAL 9059 4 Digit UHF Frequency Period Meter 500MHz, £125. RACAL 409 AM/FM Modulation Meter 3-1500MHz £250. RADIOMETER BKF.6. Distortion Meter, £120. MARCONI 2331 Distortion Factor Meter 20Hz-20KHz, £250. WAVETEK 740 Phase Meter 10Hz-2MHz, £300. MARCONI TF.1152/1 R.F. Power Meter, £75. BIRD 43 Thru-Line Wattmeter 25W 10-125MHz, £95. PHILLIPS DM2517E Multimeter 4 Digit LCD, £45 MPE Mk 1 Humidity Oven 10 degree C-100 degree C, £250. BARFIELD Analytical Sample Oven 900 degree C, £75. H.P. 141A storage Oscilloscope 20MHz, £425. TEKTRONIX 564 Storage Oscilloscope 10MHz, £300. TELEQUIPMENT D.83 Oscilloscope DC-50MHz, £450. COSSOR CDU.110 Oscilloscope DC-20MHz, £200. TELEQUIPMENT D.43 Oscilloscope DC-15MHz, £125. MARCONI TF.1101 20Hz-200KHz R.C. Oscillator, £95. MARCONI TF.144/4 AM Signal Generator, £350. MARCONI TF.2950 Mobile Radio Test Set, £1,250. MARCONI TF.2950/5 Mobile Radio Test Set, £1,850. TELSEC 2 Pen Flat Bed Recorder, £275. B & K 2305 Level Recorder, £300. RANK 12084/2 Insulation & Pulsed Flash Tester, £75. BPL CZ.457/4 & CZU.457/4 Component Comparator & High Speed Automator, £150. AIRMEC 209 20KV Ionisation Tester, £85. PSI. A100 Wave Form Generator, £395. PSI. A340 Ramp Generator, £175. HELDER SINE ADDER "As Is", £35. BARGAIN. Ultrasonic Cleaner, 3 compartment, intensity 5 Watt/sq inch water separator, in above average condition, £2,900 for quick sale. Contact: Martin Associates on Avebury (06723) 219. (1311)

BRIDGES, Waveform/transistor analysers. Calibrators. Standards. Multivoltmeters. Oscilloscopes. Recorders. Signal Generators. 040-376236. (8250)

TEKTRONIX oscilloscope 100MHz, type 7803 M/frame with 7A18N and 7B53A dual time base plug-ins, £850. Tel: During office hours, 01-985 7383. (1335)

BOX NOS.

Box number replies should be addressed to:

Box No. .... c/o Wireless World Quadrant House The Quadrant Sutton Surrey SM2 5AS

COURSES

Post-HNC Endorsement in Television Technology

A postgraduate endorsement course in Television Engineering, recognised by the IEE, for students of engineering at HNC or degree level.

18.00-21.00 Wednesday evenings

Course fee: £22 (plus an examination fee)

Enrolment: Wednesday, 30 September 17.30-19.00

Further details from, and enrolments at:

The Registry School of Engineering and Science PCL, 115 New Cavendish Street W1M 8JS. Tel: 01-486 5811 ext. 6234.



SERVICES

CIRCOLEC

THE COMPLETE ELECTRONIC MANUFACTURING SERVICE Let us realise all or any part of your project from prototypes to production, from artwork design and component sourcing, through assembly and test to final quality assurance, packing and delivery. We also provide a test, repair and modification service to suit your individual requirement.

Free Offer! Ring for details of a free introductory offer to our sub-contract PCB assembly service.

CIRCOLEC FREEPOST (no postage required) London SW17 8BR

Telephone: 01-767 1233

NEW! Access, Barclaycard, Diners Card now welcome for payment. (544)

FACILITIES AVAILABLE

- Circuit Design & Development Digital and Analogue Artwork Layout Free prototype bd. (non PTH) Supplied with orders over £100. Board Manufacture Prototype to semi-production. Wiring & Assembly PCB assembly, wiring and cable forming. Test Full test facilities available. Copper Clad Board D/S fibreglass 1000 Sq inches of assorted useful sizes. £6.00 inc. post.

One or all services available, no order too small. Please telephone Chelmsford 357935 or write to H.C.R., 1 Bankside, off New Street, Chelmsford, Essex.



(1169)

30,000 SERVICE SHEETS IN STOCK COLOUR MANUALS ALSO AVAILABLE

TV Monos, Radios £1.25; Tuners £1.25; Tape Recorders, Record Players, Transistors from £1.25; Car Radios, Stereograms, Radiograms from £2. Except Colour TV Circuits from £2. State if circuit will do, if sheets are not in stock. All TV sheets are full length 24x12", not in Bits & Pieces. All other Data full lengths. Free Fault Finding Chart or TV Catalogue with order. Crossed P.O.s returned, if sheets not in stock. S.A.E. please.

C. CARANNA 71 Beaufort Park, London NW11 6BX 01-458 4882 (Mail Order) (1325)

PRINTED CIRCUIT BOARDS

manufactured, any quantity, competitive prices, roller tinned, photographic and artwork services available.

MAYLAND PCB CO. LTD. 4 The Drive Mayland, Essex Tel: 0621 741560 (1326)

SMALL BATCH PCB'S produced from your artwork. Also DIALS, PANELS, LABELS. Camera work undertaken. FAST TURNAROUND. - Details: Winston Promotions, 9 Hatton Place, London EC1N 8V. Tel. 01-405 4127/0960. (0794)

TURN YOUR SURPLUS Capacitors, transistors etc. into cash. Contact COLES-HARDING & Co., 103 South Brink, Wisbech, Cambs. 0945-4188. Immediate settlement. We also welcome the opportunity to quote for complete factory clearance. (9508)

CONSUMER NOTICE

OCT CONSUMER NOTICE

Early models of Bremi BRS 27 power supplies imported by OCT in common with other currently imported makes were designed for the continental market and therefore did not contain the internal protection and three-core flex required to meet the British Standard.

OCT have accepted all the recommendations of the BSI (British Standards Institution) and all Bremi power supplies now on sale are made to this higher specification.

OCT are the sole importers of the 'British Market' Bremi power supply.

Consumers should beware of Bremi power supplies that meet the continental specification which may be available from other importers. (1330)

CAPACITY AVAILABLE

I.H.S. SYSTEMS

Due to expansion of our manufacturing facilities we are able to undertake assembly and testing of circuit boards or complete units in addition to contract development.

We can produce, test and calibrate to a high standard digital analogue and RF equipment in batches of tens to thousands.

Telephone to arrange for one of our engineers to call and discuss your requirements, or send full details for a prompt quotation.

TEL. 01-253 4562

or reply to Box No. WW 8237 (8237)

PCB ASSEMBLY

CAPACITY AVAILABLE

Low or high volume, single or double sided, we specialise in flow line assembly of printed circuit boards.

Using the Zevatron flow soldering system and on line lead cutting, we are able to deliver high quality assemblies on time, and competitively priced. Test facilities available.

Find out how we can help you with your production. Phone or write. We will be pleased to call on you and discuss your requirements.

TW ELECTRONICS LTD.

120 NEWMARKET ROAD BURY ST. EDMUNDS, SUFFOLK TEL: 0284 3931

Sub-contract assemblers and wireers to the Electronics Industry (1319)

ELECTRONIC DESIGN SERVICE. Immediate capacity available for circuit design and development work, PC artwork, etc. Small batch and prototype production welcome. - E.P.D.S. Ltd., 93b King Street, MAIDSTONE, Kent. 0622-077916. (9647)

PCB ASSEMBLY AND ARTWORK DESIGN service. Prototypes and batch quantities. - Pads Electrical Limited, 01-850 4516 or 01-850 5749. 79 Avery Hill Road, New Eltham, London, SE9 2BJ. (7905)

EQUIPMENT WANTED

TO ALL MANUFACTURERS AND WHOLESALERS IN THE ELECTRONIC RADIO AND TV FIELD

BROADFIELDS & MAYCO DISPOSALS

will pay you top prices for any large stocks of surplus or redundant components which you may wish to clear. We will call anywhere in the United Kingdom.

21 LODGE LANE NORTH FINCHLEY, LONDON N12 8JG Telephone Nos. 01-445 0749/445 2713 After office hours 958 7624 (9123)

SERVICES

SHEET METAL WORK, fine or general front panels chassis, covers, boxes, prototypes. 1 off or batch work, fast turnaround. 01-449 2695. M. Gear Ltd., 179A Victoria Road, New Barnet, Herts. (813)

DESIGN AND DEVELOPMENT. ANALOGUE, DIGITAL, RF AND MICROWAVE CIRCUIT AND SYSTEM DESIGN. Also PCB design, mechanical design and prototype/small batch production. - Ademore Limited, Unit 103 Liscombe, Bracknell, Berks. Tel: Bracknell 56023. (856)

PHONE YOUR CLASSIFIEDS

TO OPHELIA SMITH ON

01-661 3033

# COMPUTER APPRECIATION

86 High Street, Bletchingley, Redhill, Surrey RH1 4PA. Tel: Godstone (0883) 843221

**DEC SYSTEM 310** incorporating PDP8/A processor (with M3516/7 options & 32KW), twin RX02 double density floppy disc drives, VT52 VDU (24 x 80, upper/lower case). LA180 printer (180 cps, matrix). Software includes DIBOL. System is 2 years old and has been under DEC maintenance. £2,900

**PDP 11/03 SYSTEM** with 48K byte memory, comprising BA11 MF box and psu; LSI 11 processor; MXV 11 multifunction board; 2 serial interfaces, 2 x 2716 EPROM and real time clock; twin DIABLO Series 30 2.5 megabyte disc drives, XYLOGICS disc drive controller; LOGABAX LX180 printer & VT52 VDU. All system components except VDU and disc drives unused prior to assembly by us. £4,250

**DTG MICROFILE** Compact 8080 based systems available in various configurations, both new & secondhand. ALL systems feature: dual or quad floppy disc drives, dual serial interfaces switchable externally for Baudrate, parity, fill characters etc, programmable front panel display 8K RAM & 7K EPROM (2708). Prices from £450 for minimum system secondhand to £995 for new system with quad drives & 56K bytes.

**ITEL Model 1051 Golfball Terminal**. Featuring RS232 interface & paper tape reader/punch in compact desk top unit. Requires code conversion (by software) from Selectric to ASCII. Fully tested. £250

**DIABLO Model 1620 KSR Terminal**. Daisy wheel terminal with Hy Type II printer. £1,200

**LEAR SIEGLER Model 200 KSR** high speed printing terminal (with keyboard). Features bidirectional 9 x 5 upper/lower case matrix printer with Baud rates switchable up to 9600 Baud. 132 col., 180 cps. Self test facility. £500

**DATA DYNAMICS Model 303 ASR terminal**. Incorporating LA36 DEWriter printer with paper tape reader/punch & keyboard. 300 Baud. Upper/lower case matrix printer. £250

**TELETYPE Model ASR 33** with 20 mA current loop of RS232 interface. 110 Baud, remote reader control (which may be disabled by insertion of a jumper), paper tape reader/punch and stand (when available) from. £135

**SPERRY-REMINGTON Word Processor**. Incorporating IBM I/O typewriter with twin magnetic card stations. Operating stand-alone or suitable for conversion to on-line use. Fully refurbished printers. These printers are 280 microprocessor controlled with all firmware in 2708 EPROMS. All options, which include a self test facility, are switch selectable. Forms control and alternative fonts are available using control codes. Manufactured 1980 and unused in original packing. £525

**BCL Matrix Printer**. 120 cps with dual tractors and long platen (in excess of 300 col.). Unused. £95

**ODEC Model 4000 belt printer**. 65 lpm. Parallel TTL interface. Manufactured 1980. £95

**DIABLO SERIES 30 DISC DRIVES**. These are offered fully refurbished and may be viewed operating on-line at our premises prior to purchase. 2.5 megabyte removable cartridge version is directly compatible with the DEC RK05 drive for PDP/LSI 11. P.O.A.

**As previous item, but with cartridge removable by engineer rather than operator. £425**

**IOMEC Model 3404 disc drive**. 10 megabyte capacity with one fixed and one top loading platter. 2400 rpm, 200 tpi and 2200 bpi. These drives are complete with documentation and have the industry standard interface. IOMEC are no longer in business, nevertheless, electronic components are standard and we can supply incomplete drives free of charge to buyers. Service is, in any case, apparently available for IOMEC drives. BRAND NEW in original boxes. £550

**WANGCO Model T1222 disc drives**. With one fixed and one top loading platter of 5 megabyte capacity total. 2500 rpm, industry standard interface. £350

**STOCK CONTROL INTERNATIONAL Model 744 digital cassette unit**. Designed to connect between a terminal and processor giving ASR capability to a KSR terminal. 256 kByte capacity on Philips type cassettes. £100

**DEC Model CR11 card reader**. £250

**DATEK Model 40 Tape Reader**. Solenoid operated finger type. 40 cps. BRAND NEW. £25

**FACT Model 4070 High Speed paper tape punch** with parallel TTL interface. Complete with all spooling covers and chad box etc. and in excellent condition. £350

**PERTEC 8000 SERIES SPARES: Tape Control Ci, Servo PSU A**. These cards BRAND NEW available at one-third manufacturer's lowest price.

**Please Note:**  
 \* VAT and carriage extra all items.  
 \* Visitors welcome, but by appointment please.  
 \* We are keen to bid competitively for all good used equipment.  
 \* We can supply a colour VHS tape of any item for the price of a tape. Alternatively, send your own tape with return postage.

# INDEX TO ADVERTISERS SEPTEMBER

Appointments Vacant Advertisements appear on pages 126-135

PAGE	PAGE	PAGE
Abacus Electronics ..... 28	Galatrek International ..... 20	PBRA Ltd ..... 100
Acoustical Mfg Co Ltd ..... 10	GAS Electronics ..... 114	PM Components ..... 103
AEL Crystals Ltd ..... 116	Global Specialities Corp (UK) Ltd ..... 17	Powertran Electronics ..... 89
Aero Electronics (AEL) Ltd ..... 90	GP Industrial Electronics Ltd ..... 9, 104	P&R Computershop ..... 100
Ambit International ..... 28		Practical Computing ..... 110
Amplivox Ltd ..... 125		Practical Wireless ..... 28
Analogue Associates ..... 3	HAL Computers Ltd ..... 118, 119	Pye Unicam Ltd ..... 30, 31
Anglia Components ..... 87	Hameg Ltd ..... 88	
Antex ..... cover iii	Happy Memories ..... 98	Racal-Dana Instruments Ltd ..... 115
Audio Electronics ..... 18, 19, 29	Harris Electronics (London) Ltd ..... 16	Radio Components Specialists ..... 109
Avel Lindberg ..... 26	Harrison Brothers ..... 107	Ralfe, P. F., Electronics ..... 111
AVO Ltd ..... 66	Hart Electronic Kits Ltd ..... 100	Reltech Instruments ..... 96
	HE Ltd ..... 99	RST Valve ..... 95
Bamber, B., Electronics ..... 102	Henry's Radio ..... 14, 20, 101	
Barrie Electronics Ltd ..... 107	Hilomast Ltd ..... 23	Safgan Electronics Ltd ..... 29
Bayliss, A. D., and Sons Ltd ..... 106		Sagin, M. R. .... 107
Black Star Ltd ..... 106	ILP Electronics Ltd ..... 92, 93	Samsons (Electronics) Ltd ..... 94
Breadboard (Mod Mags) ..... 97	ILP Transformers Ltd ..... 101	Scopex Instruments ..... 113
	Impex Electrical ..... cover ii	Sharp Electronics (UK) Ltd ..... 108
Cambridge Learning Ltd ..... 29	Interface Quartz Devices Ltd ..... 16	Shure Electronics Ltd ..... 32
Carston Electronics Ltd ..... 15	Intergrex Ltd ..... 22	Siemens Ltd ..... 11, 122, 123
Cavern Electronics ..... 94	Irvine Business Systems ..... 102	Sinclair Research Ltd ..... 12, 13
Chiltmead Ltd ..... 105		South Midlands Communications Ltd ..... 90
Clark Masts Ltd ..... 8	Jackson Music ..... 24	Sowter, E. A., Ltd ..... 98
Colomor Electronics Ltd ..... 96	Keithley Instruments Ltd ..... 65	Special Products Distributors Ltd ..... 88
Computer Appreciation ..... 136	Kelsey Acoustics Ltd ..... 88	Surrey Electronics ..... 106
Computing Today (Mod Mags) ..... 116		
Crimson Elektrik ..... 111	Langrex Supplies Ltd ..... 95	Technomatic Ltd ..... 91
Crotech Instruments Ltd ..... 112	Leader ..... 77	Tektronix UK Ltd ..... 21
CT Electronics (Acton) Ltd ..... 120		Teleradio Electronics ..... 88
	MCP Electronics ..... 16	Television Magazine ..... 104
Darom Supplies ..... 98	Micro Byte ..... 124	Telom Products Ltd ..... cover iv
Dataman Design ..... 2	Microdata Ltd ..... 11	Tempus ..... 87
Dial Industry ..... 121	Micro Times ..... 124	Time Base ..... 124
Disk Offer ..... 87	Midwich Computer Co Ltd ..... 23	Titan Transformers & Components ..... 102
Display Electronics ..... 117	Millward, G. F., Electronic Components Ltd ..... 94	Tony Chapman Electronics Ltd ..... 26
	Monolith Electronics Co Ltd ..... 26	
Elan Digital Systems Ltd ..... 101		Valradio Ltd ..... 94
Electronic Brokers Ltd ..... 4, 5, 6, 7	Northern Electronics ..... 20	Viewdata ..... 110
Electronics Today Inter (Mod Mags) ..... 90		
Electrovalve Ltd ..... 104	Office Systems ..... 112	Wilmslow Audio ..... 25
	OK Machine & Tool Ltd ..... 66	Your Computer ..... 106
Faircrest Engineering Ltd ..... 96	Olson Electronics Ltd ..... 78	Zaerix Electronics Ltd ..... 8
Farnell Instruments Ltd ..... 20, 27, RRC	OMB Electronics ..... 96	
Fieldtech Heathrow Ltd ..... 116	Orion Scientific Products Ltd ..... 28	
Flight Link Control Ltd ..... 116		

**OVERSEAS ADVERTISEMENT AGENTS:**  
**France & Belgium:** Norbert Hellin, 50 Rue de Chemin Veat, F-9100, Boulogne, Paris.  
**Hungary:** Mrs Edit, Bajusz, Hungexpo Advertising Agency, Budapest XIV, Varosliget.  
 Telephone: 225 008 - Telex: Budapest 22-4525 INTFOIRE  
**Italy:** Sig C. Epis, Etas-Kompass, S.p.a. - Servizio Estero, Via Mantegna 6, 20154 Milan.  
 Telephone: 347051 - Telex: 37342 Kompass.

**Japan:** Mr. Inatsuki, Trade Media - IBPA (Japan), B.212, Azabu Heights, 1-5-10 Roppongi, Minato-ku, Tokyo 106. Telephone: (03) 585 0581.  
**United States of America:** Ray Barnes, IPC Business Press, 205 East 42nd Street, New York, NY 10017 - Telephone: (212) 867-2080, Telex: 238327.  
 Mr Jack Farley Jr., The Farley Co., Suite 1584, 35 East Walker Drive, Chicago, Illinois 60601 - Telephone: (312) 63074.  
 Mr Victor A. Jauch, Elmatex International, P.O. Box 34607, Los Angeles, Calif. 90034, USA - Telephone (213) 821-8581 - Telex: 18-1059.

Mr Jack Mentel, The Farley Co., Suite 650, Ranna Building, Cleveland, Ohio 44115 - Telephone: (216) 621 1919.  
 Mr Ray Rickles, Ray Rickles & Co., P.O. Box 2028, Miami Beach, Florida 33140 - Telephone (305) 532 7301.  
 Mr Tim Parks, Ray Rickles & Co., 3116 Maple Drive N.E., Atlanta, Georgia 30305. Telephone: (404) 237 7432.  
 Mike Loughlin, IPC Business Press, 15055, Memorial Ste 119, Houston, Texas 77079 - Telephone (713) 783 8673.  
**Canada:** Mr Colin H. MacCulloch, International Advertising Consultants Ltd., 915 Carlton Tower, 2 Carlton Street, Toronto 2 - Telephone (416) 364 2269.  
 \* Also subscription agents.



INTRODUCING THE NEW "READY TO GO" SOLDERING IRON FROM ANTEX WITH BUILT-IN FINGER PROTECTION FROM



Models XS-BP (25 watt) and CS-BP (17 watt) have moulded-on safety plugs, 'unbreakable' handles and detachable hooks-cum-finger-protectors. High class insulation by ceramic shaft, negligible leakage. Long life iron and nickel plated bits, easily interchanged, slide on or off stainless steel shafts which enclose the heating elements for maximum efficiency of heat transfer. Both models available for 240v, 115v, 24v or 12 volt. R.S.P. £5.30 plus V.A.T.

ANTEX LIMITED, Mayflower House, Plymouth, Devon PL1 1BR. Telephone: (0752) 667377.

WW-002 FOR FURTHER DETAILS

Printed in Great Britain by QB Ltd., Sheepen Place, Colchester, and Published by the Proprietors IPC ELECTRICAL-ELECTRONIC PRESS LTD., Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS, telephone 01-661 3500. Wireless World can be obtained abroad from the following: AUSTRALIA and NEW ZEALAND: Gordon & Gotch Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service Ltd, Gordon & Gotch Ltd. SOUTH AFRICA: Central News Agency Ltd; William Dawson & Sons (S.A.) Ltd. UNITED STATES: Eastern News Distribution Inc., 14th floor, 111 Eighth Avenue, New York, N.Y. 10011.



# PROFESSIONAL TOOLCASES for Service Engineers

**£43.70**  
inc. VAT

**£39.90**  
inc. VAT

Size TL100 19" x 14" x 6"



The TL99 and TL100 are designed for the Professional Electronics, TV or Instrument Technician who needs to carry a large number of specialist tools. Constructed from hard wearing ABS with strong aluminium frames, twin handles and toggle locks. They offer a moulded tray in the base, a comprehensive 2 sided tool pallet that's reversible with space for up to 40 tools. — The TL100 will take quite a few more. There's space for documents and a heat sink for a hot soldering iron to prevent any damage being caused.

TLW4 Toolwallet measures 11" x 14" x 2½" when closed. Made from reinforced PVC with a heavy duty industrial zip. The TLW4 Toolwallet is a compact alternative when only tools are needed to be carried.

Size TL99 17" x 12" x 6"

**£13.75**  
inc. VAT

*Mail Order*

Please send

Enclosed my cheque **£** .  
(P&P £2.60 extra)

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

Tools NOT included. British made.  
Money back guarantee. Allow 7-21 days for delivery.



TLW4

**Teloman Products Ltd**  
Ermine House, Post St, Godmanchester, Cambs. PE 18 8BA (0480)65534