

# Surface Mount Frequency Mixer

## LRMS-1H+ LRMS-1H

Level 17 (LO Power +17dBm) 2 to 500 MHz



CASE STYLE: QQQ130

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

|   |                |
|---|----------------|
| Operating Temperature   | -40°C to 85°C  |
| Storage Temperature   | -55°C to 100°C |
| RF Power  | 200mW          |
| IF Current  | 40mA           |
| Permanent damage may occur if any of these limits are exceeded. |                |

### Pin Connections

|        |       |
|--------|-------|
| LO     | 1     |
| RF     | 4     |
| IF     | 5     |
| GROUND | 2,3,6 |


### Features

- low conversion loss, 6.25 dB typ.
- excellent L-R isolation, 44 dB typ.


### Applications

- HF/VHF/UHF
- instrumentation

### Outline Drawing

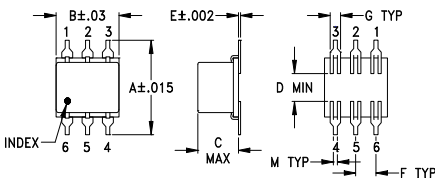


### PCB Land Pattern



### Outline Dimensions (inch/mm)

| A     | B    | C    | D    | E    | F     | G    |
|-------|------|------|------|------|-------|------|
| .400  | .31  | .200 | .10  | .010 | .100  | .050 |
| 10.16 | 7.87 | 5.08 | 2.54 | 0.25 | 2.54  | 1.27 |
| H     | J    | K    | L    | M    | wt    |      |
| .420  | .120 | .060 | .100 | .020 | grams |      |
| 10.67 | 3.05 | 1.52 | 2.54 | 0.51 | 0.55  |      |

### Demo Board MCL P/N: TB-44+ Suggested PCB Layout (PL-083)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002". COPPER: 1/2 OZ., EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Electrical Specifications


| FREQUENCY (MHz) | CONVERSION LOSS (dB) | LO-RF ISOLATION (dB) |    |    | LO-IF ISOLATION (dB) |    |    | IP3 at center band (dBm) |    |    |    |    |    |    |
|-----------------|----------------------|----------------------|----|----|----------------------|----|----|--------------------------|----|----|----|----|----|----|
|                 |                      | L                    | M  | U  | L                    | M  | U  |                          |    |    |    |    |    |    |
| 2-500           | DC-500               | 55                   | 44 | 44 | 25                   | 33 | 20 | 50                       | 34 | 45 | 25 | 37 | 22 | 25 |

1 dB COMP.: +14 dBm typ. L = low range [ $f_c$  to  $10 f_c$ ] M = mid range [ $10 f_c$  to  $f_c/2$ ] U = upper range [ $f_c/2$  to  $f_c$ ]







### Typical Performance Data

| Frequency (MHz) | Conversion Loss (dB) |           | Isolation L-R (dB) |           | Isolation L-I (dB) |           | VSWR RF Port (:1) |           | VSWR LO Port (:1) |           |
|-----------------|----------------------|-----------|--------------------|-----------|--------------------|-----------|-------------------|-----------|-------------------|-----------|
|                 | LO                   | LO +17dBm | LO                 | LO +17dBm | LO                 | LO +17dBm | LO                | LO +17dBm | LO                | LO +17dBm |
| 2.00            | 32.00                | 6.78      | 79.29              | 69.19     | 1.33               | 1.77      |                   |           |                   |           |
| 4.00            | 34.00                | 6.60      | 72.35              | 63.39     | 1.20               | 1.75      |                   |           |                   |           |
| 5.00            | 35.00                | 6.57      | 71.51              | 62.98     | 1.15               | 1.82      |                   |           |                   |           |
| 10.00           | 40.00                | 6.55      | 65.84              | 61.30     | 1.14               | 1.82      |                   |           |                   |           |
| 20.00           | 50.00                | 6.48      | 59.50              | 58.68     | 1.13               | 1.75      |                   |           |                   |           |
| 35.20           | 65.20                | 6.36      | 51.64              | 53.67     | 1.14               | 1.75      |                   |           |                   |           |
| 50.00           | 80.00                | 6.53      | 51.61              | 53.63     | 1.14               | 1.76      |                   |           |                   |           |
| 85.00           | 55.00                | 6.47      | 45.13              | 48.67     | 1.15               | 1.74      |                   |           |                   |           |
| 100.00          | 70.00                | 6.48      | 44.98              | 48.52     | 1.17               | 1.71      |                   |           |                   |           |
| 134.80          | 104.80               | 6.32      | 41.19              | 46.50     | 1.19               | 1.69      |                   |           |                   |           |
| 184.60          | 154.60               | 6.35      | 38.78              | 44.90     | 1.22               | 1.65      |                   |           |                   |           |
| 200.00          | 170.00               | 6.40      | 38.62              | 44.42     | 1.23               | 1.62      |                   |           |                   |           |
| 234.40          | 204.40               | 6.30      | 36.44              | 41.20     | 1.24               | 1.63      |                   |           |                   |           |
| 250.00          | 220.00               | 6.22      | 36.14              | 41.01     | 1.26               | 1.62      |                   |           |                   |           |
| 284.20          | 254.20               | 6.22      | 35.11              | 38.57     | 1.30               | 1.58      |                   |           |                   |           |
| 334.00          | 304.00               | 6.18      | 33.38              | 37.07     | 1.34               | 1.54      |                   |           |                   |           |
| 383.80          | 353.80               | 6.11      | 32.33              | 33.77     | 1.39               | 1.51      |                   |           |                   |           |
| 433.60          | 403.60               | 6.16      | 32.22              | 31.10     | 1.44               | 1.45      |                   |           |                   |           |
| 483.40          | 453.40               | 6.45      | 31.29              | 29.09     | 1.47               | 1.41      |                   |           |                   |           |
| 500.00          | 470.00               | 6.45      | 30.80              | 28.30     | 1.49               | 1.39      |                   |           |                   |           |

### Electrical Schematic

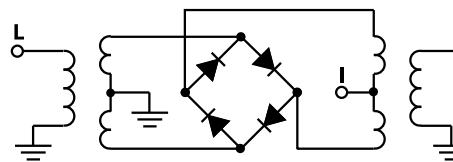

## Performance Charts

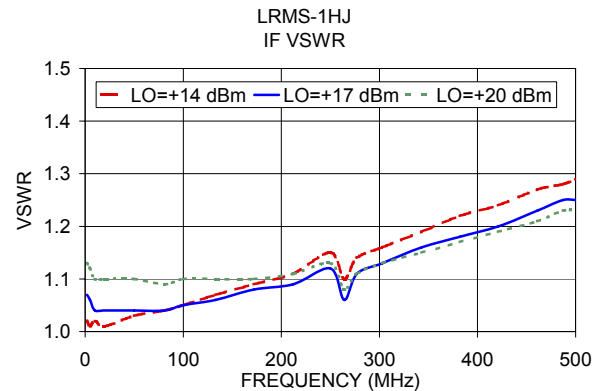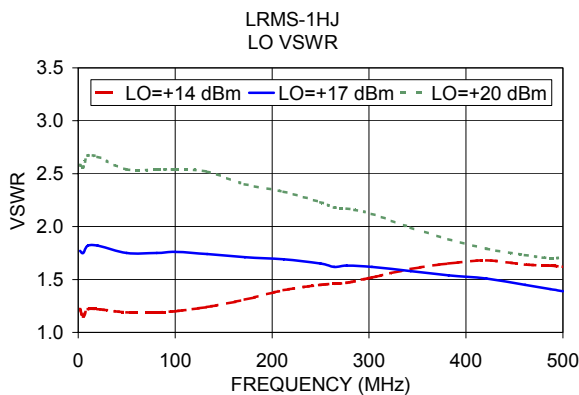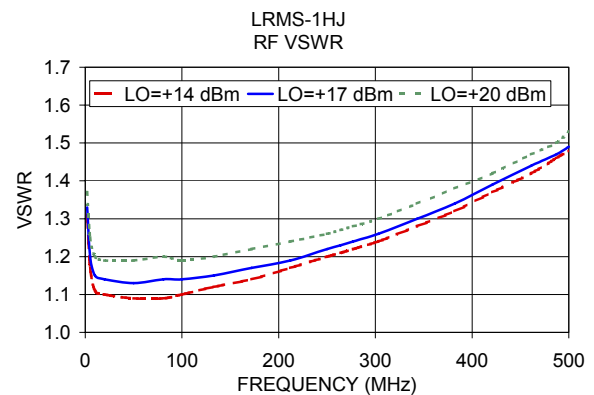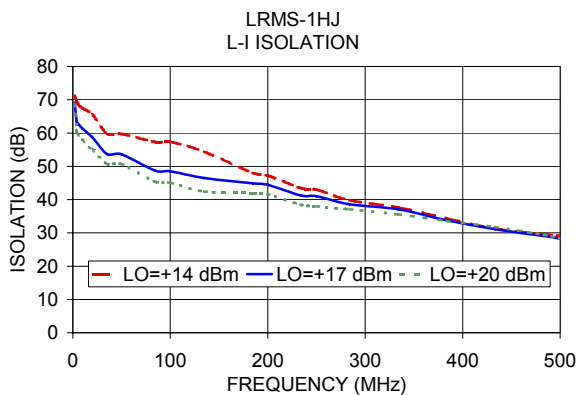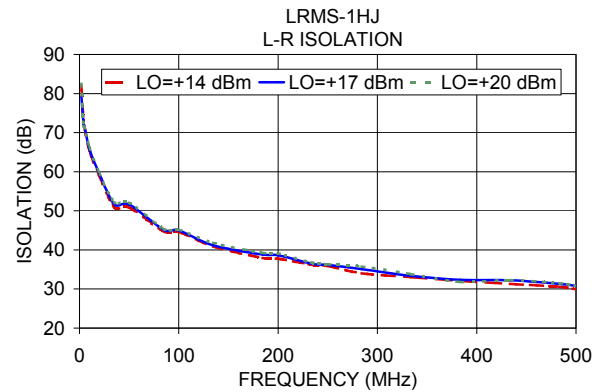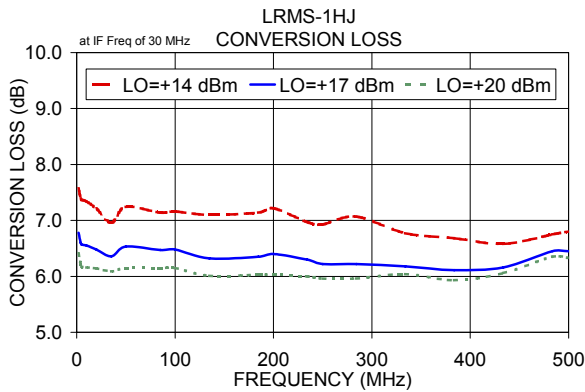

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)