

Surface Mount RF Transformer



ADTT3-2

0.2 to 210 MHz

Maximum Ratings


Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.5 W

Pin Configuration (kr)

primary dot	3
primary	1
primary ct	2
secondary dot	4
secondary	6
secondary ct	5

EVALUATION BOARD P/N: TB-42


Outline Drawing

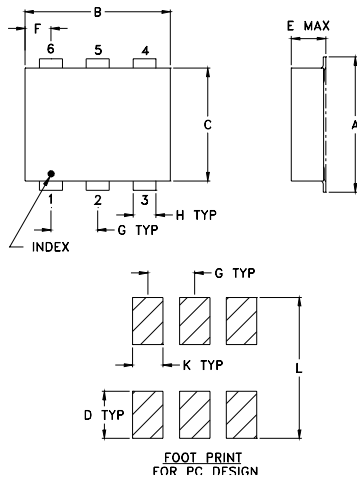

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.280	.310	.220	.100	.162	.055	.100	.030
7.11	7.87	5.58	2.54	4.11	1.40	2.54	0.76
J	K	L	wt.				
—	.065	.300	grams				
—	1.65	7.62	.45				

config. B



Features

- excellent amplitude unbalance, 0.2 dB typ. in 1 dB bandwidth
- excellent return loss, 20 dB typ. in 1 dB bandwidth

Applications

- impedance matching
- balanced amplifier



CASE STYLE: CD636
PRICE: \$4.50 ea.
QTY. (10-49)

Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
3	0.2-210	0.2-210	0.3-150	0.5-90	1	4	0.2	0.2

* Insertion Loss is referenced to mid-band loss, 0.3 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
0.19	0.56	15.08	0.02	0.05
0.27	0.51	17.97	0.01	0.04
5.00	0.29	24.23	0.01	0.02
10.00	0.31	23.55	0.00	0.22
50.00	0.43	18.00	0.03	0.26
90.00	0.62	13.82	0.05	0.80
145.00	1.01	10.13	0.12	1.53
155.00	1.10	9.61	0.13	1.96
180.00	1.34	8.44	0.21	2.51
210.00	1.71	7.24	0.31	3.54

