


**This page intentionally left blank,
to allow for the correct viewing of
continuous facing pages.**

BI-PHASE 1 MHz to 2 GHz



TFAS



PAS GAS


MODEL NO.	FREQUENCY MHz		INSERTION LOSS dB (±20 mA)				MAX. INPUT PWR dBm (±20 mA)		IN-OUT ISOLATION, dB (0 mA)						BI-PHASE \bar{X} (±20 mA) Typ.				CASE STYLE	CONNECTION	PRICE \$
	IN f_L - f_U	CON	Mid-Band m		Total Range		1 dB compr.	no damage	L	M		U		Total Range	Phase(deg) deviation from 180°	Total Range	Note B				
			Typ.	Max.	Typ.	Max.				Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.					m			
PAS-1*	5-450	DC-0.05	3.5	4.0	3.5	4.7	20	29	65	50	45	35	35	25	0.1	0.1	0.5	1.2	A01	cf	33.95
PAS-2*	10-1000	DC-0.05	4.0	6.0	6.5	8.5	20	29	50	40	40	30	35	25	0.1	0.3	0.5	1.0	A01	cg	47.95
PAS-3*	1-200	DC-0.05	1.4	2.0	1.6	2.5	15	29	65	50	50	40	50	35	0.1	0.1	0.5	1.0	A01	cf	34.95
PAS-2000**	100-2000	DC-0.5	4.2	6.5	5.4	7.5	19R	25	30	22	—	—	26	20	0.3	0.4	5.0	8.0	A05	ch	24.95
☐ TFAS-1*	2-400	DC-0.05	1.4	2.0	1.6	3.0	20<	25	65	45	45	33	35	25	0.1	0.1	1.0	2.0	B02	cm	13.95
☐ TFAS-2**	10-1000	DC-0.5	3.7	4.5	5.0	8.0	17O	25	50	30	42	20	31	20	0.1	0.2	2.0	3.0	B02	cm	17.95
☐ GAS-1**	5-450	DC-0.05	3.3	4	3.5	5.0	20	25	60	48	45	35	35	25	0.10	0.1	1.0	1.5	A05	cf	13.95
☐ GAS-2**	10-1000	DC-0.05	4.3	6	5.2	8.5	20	25	55	40	35	25	28	20	0.10	0.3	1.5	3.0	A05	cg	15.95

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

m = mid band [$2 f_L$ to $f_U/2$]

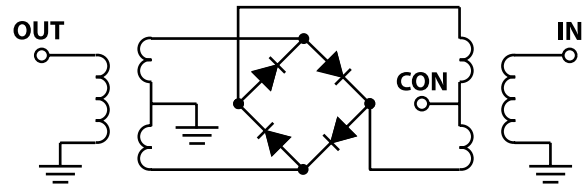

NOTES:

- * Recommended for electronic attenuator
- ** Recommended for bi-phase modulator
- Denotes 75 Ohm model.
- ☐ Non-hermetic
- * +15 dBm from 100-800 MHz
- ◆ +15 dBm from 2-10 MHz
- ★ +13 dBm from 10-500 MHz
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel and MIL description are given in General Information (Section 0).
- B. Connector types and case mounted options, case finishes are given in section 0, see "Case styles & Outline Drawings".
- C. Prices and specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. Control current, 30mA
 - 1b. Max. Power at room temperature
- 2. Performance specifications apply for input power up to 10 dB below stated 1dB compression:
 - example: +5dBm in 2-10MHz range for TFAS-1, TFAS-1SM

Surface Mount □




MODEL NO.	FREQUENCY MHz		INSERTION LOSS dB (±20 mA)				MAX. INPUT PWR dBm (±20 mA)		IN-OUT ISOLATION, dB (0 mA)						BI-PHASE \bar{X} (±20 mA) Typ.		CASE STYLE	CONNECTION	PRICE \$		
	IN	CON	Mid-Band m		Total Range		1 dB compr.	no damage	L	M		U		Δ AMP (dB)	Phase(deg) deviation from 180°	Note B				Qty. (1-9)	
			Typ.	Max.	Typ.	Max.				Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.								m
TFAS-1SM*	2-400	DC-0.05	1.4	2.0	1.6	3.0	20*	25	65	45	45	33	35	25	0.1	0.1	1.0	2.0	NNN150	cm	13.95
TFAS-2SM**	10-1000	DC-0.5	3.7	4.5	5.0	8.0	17*	25	50	30	42	20	31	20	0.1	0.2	2.0	3.0	NNN150	cm	17.95
SYAS-1*	2-400	DC-0.05	1.4	2.0	1.6	3.0	20*	25	65	45	45	33	35	25	0.1	0.1	1.0	2.0	TTT167	ck	9.95
SYAS-2**	10-1000	DC-0.05	4.0	6.0	4.5	7.0	17*	25	59	40	42	28	28	20	0.1	0.3	2.0	3.0	TTT167	ck	13.95
SYAS-860**	600-1000	DC-0.5	—	—	2.7	5.7	14	25	25	(typ.)		18 (min.)		—	0.5	—	4.0	TTT166	ck	15.95	
RAS-1**	2-400	DC-0.05	1.4	2.4	1.6	3.2	20R	25	65	45	45	28	32	22	0.10	0.1	1.0	2.0	TT241	ge	7.95
RAS-2-75**	10-1000	DC-0.05	4.1	6.0	4.5	7.5	20	25	58	40	42	28	39	20	0.15	0.3	1.5	3.0	TT240	cj	9.95
LRAS-2-75**	10-1000	DC-0.05	4.1	6.0	4.5	7.5	20	25	58	40	42	28	39	20	0.15	0.3	1.5	3.0	QQQ130	cj	9.95

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]
m = mid band [$2 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

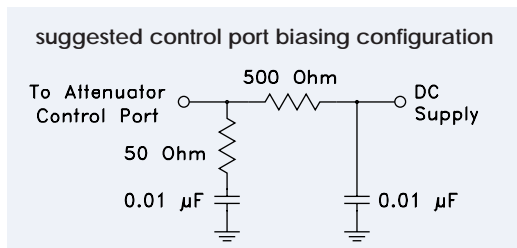

pin and coaxial connections

see case style outline drawings for pin locations

PORT	cf	cg	ch	cj	ck	cm	ge
INPUT	1	1	1	4	1	1	4
OUTPUT	8	8	8	1	2	4	1
CONTROL	3,4 ^	3,4 ^	3	5	3	2	5
GND EXT.	2,5,6,7	2,5,6,7	2,5,6,7	2,3,6	4,5,6	3	2,3,6
CASE GND	2	2,5,6,7	2,5,6,7	—	—	3	—
NOT USED	—	—	4	—	—	—	—

^ Pins must be connected together externally.

NSN GUIDE

MCL NO.	NSN
PAS-1	5985-01-282-2105
PAS-2	5985-01-192-0100
PAS-3	5895-01-067-3035




The Design Engineers Search Engine
Provides Actual Data Instantly
At: <http://www.minicircuits.com>

In Stock... Immediate Delivery
For Custom Versions Of Standard Models
Consult Our Applications Dept.



ATTENUATORS/SWITCHES *Coaxial*

BI-PHASE 1 MHz to 2 GHz

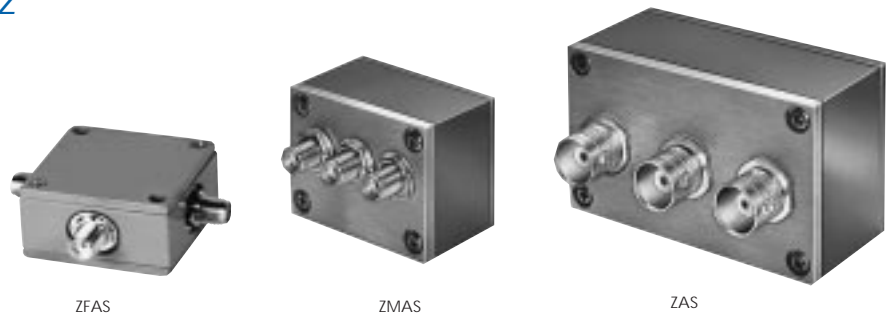

ZFAS

ZMAS

ZAS



MODEL NO.	FREQUENCY MHz		INSERTION LOSS dB (±20 mA)				MAX. INPUT PWR dBm (±20 mA)		IN-OUT ISOLATION, dB (0 mA)						BI-PHASE \bar{X} (±20 mA) Typ.				CASE STYLE	CONNECTION	PRICE \$
	IN f_L - f_U	CON	Mid-Band m		Total Range		1 dB compr.	no damage	L		M		U		Δ AMP (dB) Total Range	Phase(deg) deviation from 180° Total Range		Note B			
			Typ.	Max.	Typ.	Max.			Typ.	Min.	Typ.	Min.	Typ.	Min.		m	Range				
ZMAS-1*	5-450	DC-0.05	3.5	4	3.5	4.7	20	30	65	50	55	40	35	25	0.10	0.1	0.5	1.2	M21	cp	66.95
ZMAS-3*	1-200	DC-0.05	1.4	2	1.6	2.5	15	30	65	50	50	40	50	35	0.10	0.1	0.5	1.0	M21	cp	67.95
ZAS-1*	5-450	DC-0.05	3.5	4	3.5	4.7	20	30	65	50	55	40	35	25	0.10	0.1	0.5	1.2	M22	cp	59.95
ZAS-3*	1-200	DC-0.05	1.4	2	1.6	2.5	15	30	65	50	50	40	50	35	0.10	0.1	0.5	1.0	M22	cp	59.95
▲ ZFAS-2000**	100-2000	DC-0.5	4.2	6.5	5.4	7.5	19R	25	30	22	—	—	26	20	0.3	0.4	5.0	8.0	K18	cn	64.95

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]
m = mid band [$2 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

suggested control port biasing configuration

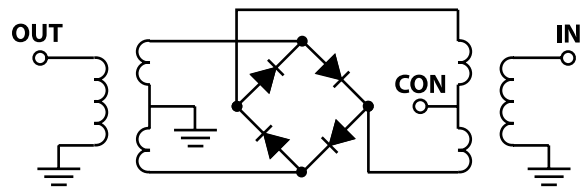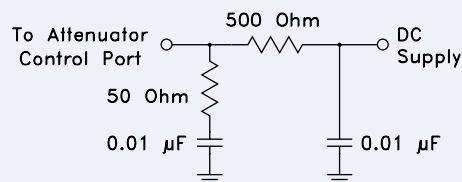

NSN GUIDE

MCL NO.	NSN
ZAS-3B	5985-01-267-2832
ZMAS-1	5985-01-140-4291

NOTES:

- * Recommended for electronic attenuator
- ** Recommended for bi-phase modulator
- ▲ Available only with SMA connectors.
- * +15 dBm from 100-800 MHz
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel and MIL description are given in General Information (Section 0).
- B. Connector types and case mounted options, case finishes are given in section 0, see "Case styles & Outline Drawings".
- C. Prices and specifications subject to change without notice.
 1. Absolute maximum power, voltage and current ratings:
 - 1a. Control current, 30mA
 2. Performance specifications apply for input power up to 10 dB below stated 1dB compression.

coaxial connections

see case style outline drawings

PORT	cn	cp
INPUT	2	3
OUTPUT	1	1
CONTROL	3	2
GND EXT.	—	—
CASE GND	—	—
NOT USED	—	—