

NEW!

Adapters, SMA-F to SMA-M

SF-SM 50

50Ω, DC to 18 GHz



Features

- flat response
- excellent VSWR, 1.05:1 typ. up to 12.4 GHz and 1.15:1 typ. up to 18 GHz
- gold plated
- low cost adapters, available from stock

Applications

- connector saver
- cable extender


Electrical Specifications

MODEL NO.	CONNECTOR TYPE		FREQUENCY (GHz) f_L - f_U	VSWR (:1) Max.			IMPEDANCE (OHMS)	CASE STYLE	PRICE \$ Qty. (1-49)
	CONN 1	CONN 2		DC-8 GHz	DC-12.4 GHz	DC-18 GHz			
SF-SM 50	SMA-Female	SMA-Male	DC-18	1.10	1.28	1.30	50	DJ836	8.95

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Outline Drawing

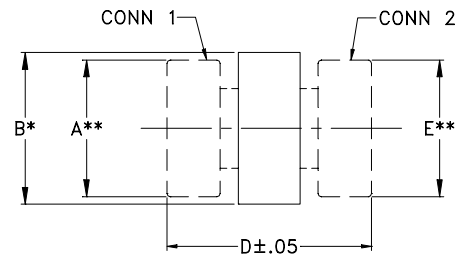

* MAX FOR DJ826, 827, 836.
 ** DIM IS ACROSS FLATS
 B - OVERALL ADAPTER DIMENSION
 BODY/CONNECTOR SHAPE VARIES

Outline Dimensions (inch mm)

A	B	C	D	E	wt. grams
—	.36	—	0.72	.312	3.2
—	9.14	—	18.29	7.92	



INTERNET <http://www.minicircuits.com>
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
 Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

REV. OR
 M78286
 EC-3245A
 SF-SM50
 RS/TD/CP
 010911