


PRODUCT INFORMATION

1300nm

1A380
High-Performance LED

Datacom

This device is designed for ESCON and Fibre Channel 266 Mbps applications and offers an excellent price/performance ratio for cost-effective solutions. Its double-lens optical system results in optimum coupling of power into the fiber.

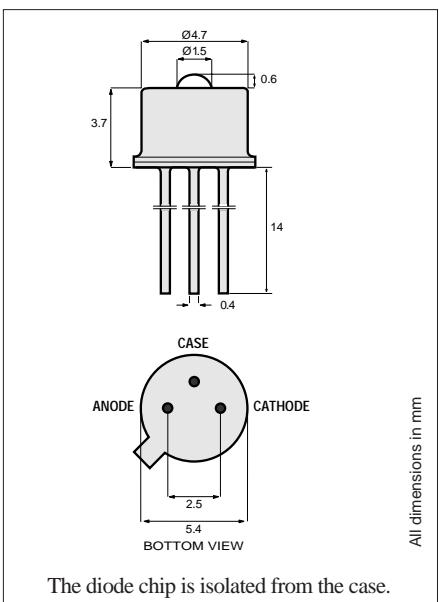

TO-46 Package With Lens

Optical and Electrical Characteristics (25°C Case Temperature)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	
Fiber-Coupled Power	P_{fiber}	-18.5		-14.5	dBm	$I_F=60\text{mA}$ (Note 1)	Fiber: 62.5/125 μm Graded Index NA=0.275
Rise and Fall Time (10-90%, no bias)	t_r, t_f		1.4		ns	$I_F=60\text{mA}$ (Note 2)	
Bandwidth (3dB _{el})	f_c		160		MHz	$I_F=60\text{mA}$	
Center Wavelength	λ_c		1320		nm	$I_F=60\text{mA}$ (Note 2)	
Spectral Width (FWHM)	$\Delta\lambda$		135		nm	$I_F=60\text{mA}$ (Note 2)	
Forward Voltage	V_F		1.3	1.65	V	$I_F=60\text{mA}$	
Reverse Current	I_R			100	μA	$V_R=1\text{V}$	
Capacitance	C		200		pF	$V_R=0\text{V}, f=1\text{MHz}$	

Note 1: Measured at the exit of 100 meters of fiber.

Note 2: Meets the ANSI X3.320 specification for Fibre Channel.

Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT
Storage Temperature	T_{stg}	-55 to +125°C
Operating Temperature	T_{op}	-55 to +125°C
Electrical Power Dissipation	P_{tot}	160 mW
Continuous Forward Current ($f \leq 10\text{ kHz}$)	I_F	80 mA
Peak Forward Current (duty cycle $\leq 50\%$, $f \geq 1\text{ MHz}$)	I_{FRM}	130 mA
Reverse Voltage	V_R	1.5 V
Soldering Temperature (2mm from the case for 10sec)	T_{sld}	260°C

Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink	R_{thjc}			150	°C/W
Thermal Resistance - No Heat Sink	R_{thja}			500	°C/W
Temperature Coefficient - Optical Power	dP/dT_j		-0.8		%/°C
Temperature Coefficient - Wavelength	$d\lambda/dT_j$		0.55		nm/°C