



# PRODUCT INFORMATION

840nm

**1A440**  
VCSEL Laser Diode

**Datacom, General Purpose**

This Vertical Cavity Surface-Emitting Laser is designed for Fibre Channel, Gigabit Ethernet, ATM and general applications. It operates in multiple transverse and single longitudinal mode, ensuring stable coupling of power and low noise. And it matches the 1A354 PIN Photodiode.

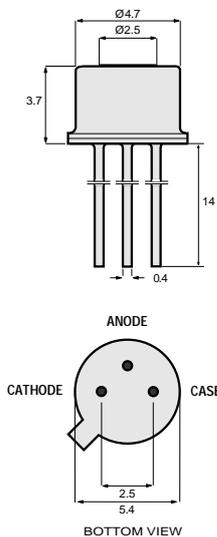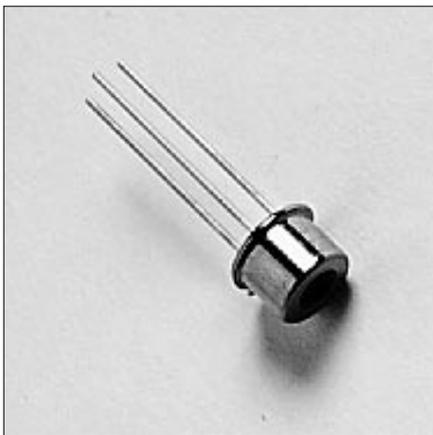

All dimensions in mm

The chip is isolated from the case.

### TO-46 Package With Flat Window

**WARNING:** Laser Radiation, avoid exposure to beam. Class 3B laser product, potential eye hazard. Warning labels in each box.

## Optical and Electrical Characteristics (25° C Case Temperature)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Fiber-Coupled Power	$P_{\text{fiber}}$		1.3		mW	$I_F=12\text{mA}$ (Note 1)
Optical Power	$P_O$	0.9	1.7	3.0	mW	$I_F=12\text{mA}$
Slope Efficiency ( $dP_O/dI_F$ )	$\eta$		200		mW/A	$I_F=12\text{mA}$
Beam Divergence	$\theta$		15		deg	Full Width at $1/e^2$
Bandwidth ( $3\text{dB}_{\text{e}1}$ )	$f_C$		2		GHz	$I_F=12\text{mA}$
Peak Wavelength	$\lambda_p$	830	840	860	nm	$I_F=12\text{mA}$
Spectral Width (FWHM)	$\Delta\lambda$		0.5	1	nm	$I_F=12\text{mA}$
Forward Voltage	$V_F$		1.9	2.2	V	$I_F=12\text{mA}$
Threshold Current	$I_{th}$		3.5	6	mA	
Relative Intensity Noise	RIN		-130		dB/Hz	$I_F=12\text{mA}$ , $f=1\text{GHz}$

**Note 1:** Fiber: 50/125 Graded Index, NA=0.2 or 62.5/125 Graded Index, NA=0.275. An external glass ball lens with 2 mm diameter is required.

## Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT
Storage Temperature	$T_{\text{stg}}$	-55 to +125°C
Operating Temperature	$T_{\text{op}}$	0 to +70°C
Electrical Power Dissipation	$P_{\text{tot}}$	35 mW
Continuous Forward Current ( $f \leq 10\text{kHz}$ )	$I_F$	15 mA
Peak Forward Current (duty cycle $\leq 50\%$ , $f \geq 1\text{MHz}$ )	$I_{\text{FRM}}$	25 mA
Reverse Voltage	$V_R$	1.5 V
Soldering Temperature (2mm from the case for 10 sec)	$T_{\text{sld}}$	260°C

## Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink	$R_{\text{thjc}}$		400		°C/W
Thermal Resistance - No Heat Sink	$R_{\text{thja}}$		700		°C/W
Temp. Coefficient - Wavelength	$d\lambda/dT_j$		0.06		nm/°C
Optical Power - Variation 0 to 70°C	$\Delta P$		$\pm 0.7$		dB
Threshold Current - Variation 0 to 70°C	$\Delta I_{th}$		$\pm 0.6$		mA

13430.11 1998-02-04



Europe: Tel (46) 8 58 02 45 00 Fax (46) 8 58 02 01 10  
Tel (44) 1291 436180 Fax (44) 1291 436771

America: Tel 1-800-96MITEL Fax (613) 592-6909  
Asia: Tel (65) 293 5312 Fax (65) 293 8527