


PRODUCT INFORMATION

840nm

1A444
VCSEL Laser Diode

Datacom, General Purpose

This Vertical Cavity Surface-Emitting Laser is designed for Fibre Channel, Gigabit Ethernet, ATM and general applications. It operates in multiple transverse and single longitudinal mode, ensuring stable coupling of power and low noise. And it matches the 1A354 PIN Photodiode.

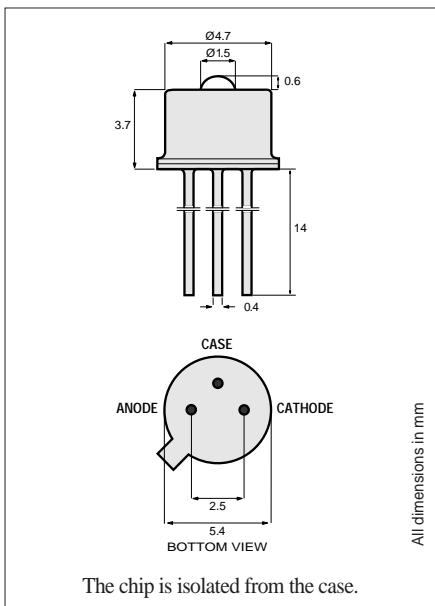

TO-46 Package With Lens

WARNING: Laser Radiation, avoid exposure to beam. Class 3B laser product, potential eye hazard. Warning labels in each box.

Optical and Electrical Characteristics (25°C Case Temperature)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Fiber-Coupled Power	P_{fiber}		1.3		mW	$I_F=12\text{mA}$ (Note 1)
Optical Power	P_o	0.9	1.7	3.0	mW	$I_F=12\text{mA}$
Slope Efficiency (dP_o/dI_F)	η		200		mW/A	$I_F=12\text{mA}$
Bandwidth (3dB_{el})	f_c		2		GHz	$I_F=12\text{mA}$
Peak Wavelength	λ_p	830	840	860	nm	$I_F=12\text{mA}$
Spectral Width (FWHM)	$\Delta\lambda$		0.5	1	nm	$I_F=12\text{mA}$
Forward Voltage	V_F		1.9	2.2	V	$I_F=12\text{mA}$
Threshold Current	I_{th}		3.5	6	mA	
Relative Intensity Noise	RIN		-130		dB/Hz	$I_F=12\text{mA}$, f=1 GHz

Note 1: Fiber: 50/125 Graded Index, NA=0.2 or 62.5/125 Graded Index, NA=0.275.

Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT
Storage Temperature	T_{stg}	-55 to +125°C
Operating Temperature	T_{op}	0 to +70°C
Electrical Power Dissipation	P_{tot}	35 mW
Continuous Forward Current ($f \leq 10\text{ kHz}$)	I_F	15 mA
Peak Forward Current (duty cycle $\leq 50\%$, $f \geq 1\text{ MHz}$)	I_{FRM}	25 mA
Reverse Voltage	V_R	1.5 V
Soldering Temperature (2mm from the case for 10 sec)	T_{sld}	260°C

Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink	R_{thjc}		400		°C/W
Thermal Resistance - No Heat Sink	R_{thja}		700		°C/W
Temp. Coefficient -Wavelength	$d\lambda/dT_j$		0.06		nm/°C
Optical Power - Variation 0 to 70°C	ΔP		±0.7		dB
Threshold Current - Variation 0 to 70°C	ΔI_{th}		±0.6		mA