



Very Low Phase Noise 300MHz ÷10/11

Supersedes February 1992 edition

DS3230 - 3.1 April 1994

The SP8401 is a very low phase noise variable modulus divider. Special circuit techniques have been used to reduce the phase noise considerably below that produced by standard dividers. The modulus control input is CMOS or TTL compatible.

The SP8401 is packaged in a 28 pin plastic SO package to be compatible with the SP8400 and SP8402 devices.

FEATURES

- Very low Phase Noise (Typically -160dBc/Hz at 1kHz offset)
- Supply Voltage 5V

ABSOLUTE MAXIMUM RATINGS

Supply Voltage 6.5V
Output Current 20mA
Storage Temperature Range -55°C to +125°C
Maximum Clock Input Voltage 2.5V p-p

28 N/C N/C N/C ш 27 ш N/C N/C = Ь 3 26 N/C 25 D N/C GND = 24 🗖 N/C þ CLOCK INPUT . 23 N/C ъ CLOCK INPUT -22 N/C CLOCK INPUT . 21 OUTPUT **CLOCK INPUT** ш 20 _ OUTPUT Ш GND 10 19 N/C v_{cc +5}v □ 11 18 Н V_{CC} +5V 12 17 ₽ N/C N/C = ⊞ N/C MODULUS CONTROL ъ N/C **MP28**

Fig.1 Pin connections - top view

ORDERING INFORMATION

SP8401 KG MPES(Commercial Grade)

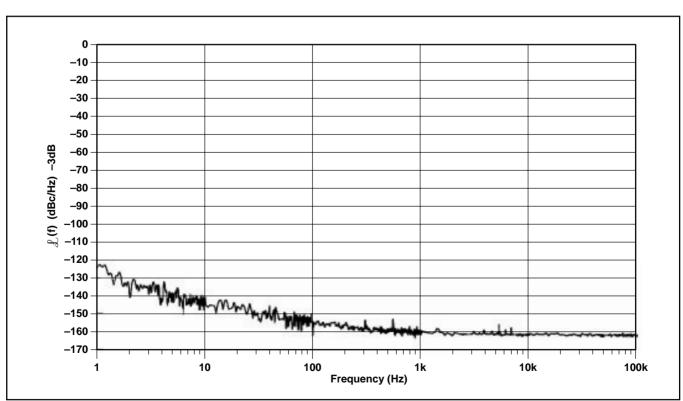


Fig.2 Typical single sideband phase noise measured at 300MHz

ELECTRICAL CHARACTERISTICS

Guaranteed over: Supply voltage V_{CC} = +4.75V to +5.25V Temperature T_{amb} = -10°C to +75°C Tested at +4.75V and +5.25V at T_{amb} = +25°C

Characteristic	Pin	Value			Units	Conditions
		Min.	Тур.	Max.		Conditions
Supply current	4, 11, 12, 18	50	57	64	mA	Output loaded with 300R See Fig.5
Output voltage swing	20, 21	340	440		mV	p-p @ 330MHz input ÷ 11 mode
						Output loaded with 300R
Input sensitivity 50MHz to 300MHz	7, 8			140	mV	RMS Sine wave into 50 Ohms
				(-4)	dBm	(dBm equivalent) See Fig.3
Modulus Control Inputs						
Logic high voltage	14	2.2			V	÷ 10 mode
Low low voltage	14			0.8		÷ 11 mode
Input current	14			180	μΑ	Modulus control input voltage 5V
Set up time t _s	14		4		ns	
Release time t _r	14		4		ns	

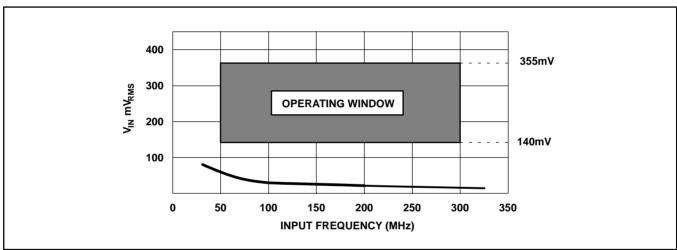


Fig.3 Typical input sensitivity

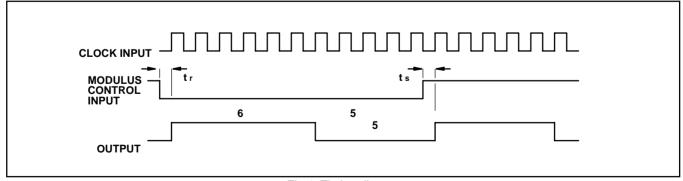


Fig.4 Timing diagram


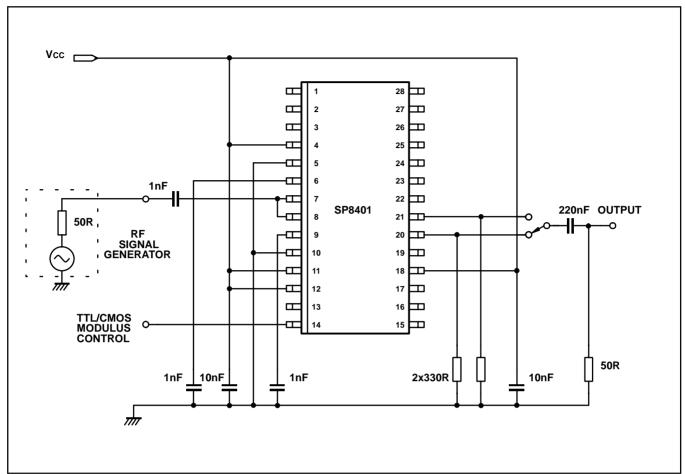


Fig.4 Test circuit

PACKAGE DETAILS

Dimensions are shown thus: mm (in).



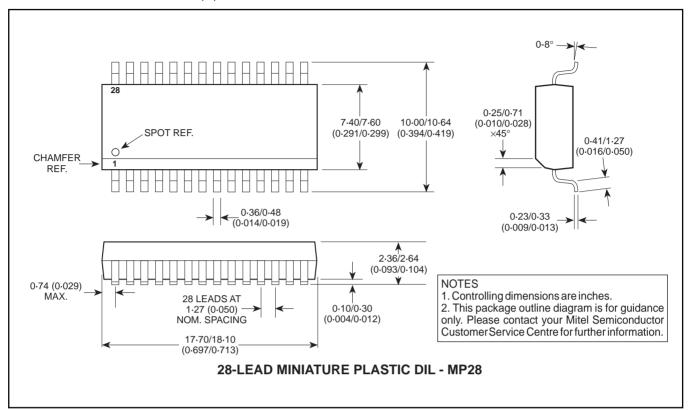

SEMICONDUCTOR

HEADQUARTERS OPERATIONS

MITEL SEMICONDUCTOR

Cheney Manor, Swindon, Wiltshire SN2 2QW, United Kingdom.

Tel: (01793) 518000 Fax: (01793) 518411

MITEL SEMICONDUCTOR

1500 Green Hills Road, Scotts Valley, California 95066-4922 United States of America. Tel (408) 438 2900

Fax: (408) 438 5576/6231

Internet: http://www.mitelsemi.com

CUSTOMER SERVICE CENTRES

- FRANCE & BENELUX Les Ulis Cedex Tel: (1) 69 18 90 00 Fax: (1) 64 46 06 07
- GERMANY Munich Tel: (089) 419508-20 Fax: (089) 419508-55
- ITALY Milan Tel: (02) 6607151 Fax: (02) 66040993
- JAPAN Tokyo Tel: (03) 5276-5501 Fax: (03) 5276-5510
- KOREA Seoul Tel: (2) 5668141 Fax: (2) 5697933
- NORTH AMERICA Scotts Valley, USA Tel: (408) 438 2900 Fax: (408) 438 5576/6231
- SOUTH EAST ASIA Singapore Tel:(65) 3827708 Fax: (65) 3828872
- SWEDEN Stockholm Tel: 46 8 702 97 70 Fax: 46 8 640 47 36
- TAIWAN, ROC Taipei Tel: 886 2 25461260 Fax: 886 2 27190260
- UK, EIRE, DENMARK, FINLAND & NORWAY
 Swindon Tel: (01793) 726666 Fax: (01793) 518582

These are supported by Agents and Distributors in major countries world-wide. © Mitel Corporation 1998 Publication No. DS3230 Issue No. 3.1 April 1994

TECHNICAL DOCUMENTATION - NOT FOR RESALE. PRINTED IN UNITED KINGDOM

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to use user is used to use user is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to use user is used to use user is used to use user is user in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.