

User's Manual

μ PD780024A, 780034A, 780024AY, 780034AY Subseries 8-Bit Single-Chip Microcontrollers

μ PD780021A
 μ PD780022A
 μ PD780023A
 μ PD780024A
 μ PD780021A(A)
 μ PD780022A(A)
 μ PD780023A(A)
 μ PD780024A(A)

μ PD780031A
 μ PD780032A
 μ PD780033A
 μ PD780034A
 μ PD780031A(A)
 μ PD780032A(A)
 μ PD780033A(A)
 μ PD780034A(A)
 μ PD78F0034A

μ PD780021AY
 μ PD780022AY
 μ PD780023AY
 μ PD780024AY
 μ PD780021AY(A)
 μ PD780022AY(A)
 μ PD780023AY(A)
 μ PD780024AY(A)

μ PD780031AY
 μ PD780032AY
 μ PD780033AY
 μ PD780034AY
 μ PD780031AY(A)
 μ PD780032AY(A)
 μ PD780033AY(A)
 μ PD780034AY(A)
 μ PD78F0034AY

[MEMO]

NOTES FOR CMOS DEVICES

① PRECAUTION AGAINST ESD FOR SEMICONDUCTORS

Note:

Strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it once, when it has occurred. Environmental control must be adequate. When it is dry, humidifier should be used. It is recommended to avoid using insulators that easily build static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work bench and floor should be grounded. The operator should be grounded using wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with semiconductor devices on it.

② HANDLING OF UNUSED INPUT PINS FOR CMOS

Note:

No connection for CMOS device inputs can be cause of malfunction. If no connection is provided to the input pins, it is possible that an internal input level may be generated due to noise, etc., hence causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using a pull-up or pull-down circuitry. Each unused pin should be connected to V_{DD} or GND with a resistor, if it is considered to have a possibility of being an output pin. All handling related to the unused pins must be judged device by device and related specifications governing the devices.

③ STATUS BEFORE INITIALIZATION OF MOS DEVICES

Note:

Power-on does not necessarily define initial status of MOS device. Production process of MOS does not define the initial operation status of the device. Immediately after the power source is turned ON, the devices with reset function have not yet been initialized. Hence, power-on does not guarantee out-pin levels, I/O settings or contents of registers. Device is not initialized until the reset signal is received. Reset operation must be executed immediately after power-on for devices having reset function.

FIP, EEPROM, and IEBus are trademarks of NEC Corporation.

Windows and Windows NT are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

PC/AT is a trademark of IBM Corporation.

HP9000 Series 700 and HP-UX are trademarks of Hewlett-Packard Company.

SPARCstation is a trademark of SPARC International, Inc.

Solaris and SunOS are trademarks of Sun Microsystems, Inc.

Ethernet is a trademark of Xerox Corp.

NEWS and NEWS-OS are trademarks of Sony Corporation.

OSF/Motif is a trademark of OpenSoftware Foundation, Inc.

TRON is an abbreviation of The Realtime Operating system Nucleus.

ITRON is an abbreviation of Industrial TRON.

The export of these products from Japan is regulated by the Japanese government. The export of some or all of these products may be prohibited without governmental license. To export or re-export some or all of these products from a country other than Japan may also be prohibited without a license from that country. Please call an NEC sales representative.

License not needed:

μPD78F0034ACW, 78F0034AGC-AB8, 78F0034AGK-8A8
μPD78F0034AYCW, 78F0034AYGC-AB8, 78F0034AYGK-8A8

The customer must judge the need for a license for the following products:

μPD780021ACW-xxx, 780022ACW-xxx, 780023ACW-xxx, 780024ACW-xxx
μPD780021AGC-xxx-AB8, 780022AGC-xxx-AB8, 780023AGC-xxx-AB8
μPD780024AGC-xxx-AB8, 780021AGK-xxx-8A8, 780022AGK-xxx-8A8
μPD780023AGK-xxx-8A8, 780024AGK-xxx-8A8, 780021ACW(A)-xxx
μPD780022ACW(A)-xxx, 780023ACW(A)-xxx, 780024ACW(A)-xxx
μPD780021AGC(A)-xxx-AB8, 780022AGC(A)-xxx-AB8, 780023AGC(A)-xxx-AB8
μPD780024AGC(A)-xxx-AB8, 780021AGK(A)-xxx-8A8, 780022AGK(A)-xxx-8A8
μPD780023AGK(A)-xxx-8A8, 780024AGK(A)-xxx-8A8, 780021AYCW-xxx
μPD780022AYCW-xxx, 780023AYCW-xxx, 780024AYCW-xxx
μPD780021AYGC-xxx-AB8, 780022AYGC-xxx-AB8, 780023AYGC-xxx-AB8
μPD780024AYGC-xxx-AB8, 780021AYGK-xxx-8A8, 780022AYGK-xxx-8A8
μPD780023AYGK-xxx-8A8, 780024AYGK-xxx-8A8, 780021AYCW(A)-xxx
μPD780022AYCW(A)-xxx, 780023AYCW(A)-xxx, 780024AYCW(A)-xxx
μPD780021AYGC(A)-xxx-AB8, 780022AYGC(A)-xxx-AB8, 780023AYGC(A)-xxx-AB8
μPD780024AYGC(A)-xxx-AB8, 780021AYGK(A)-xxx-8A8, 780022AYGK(A)-xxx-8A8
μPD780023AYGK(A)-xxx-8A8, 780024AYGK(A)-xxx-8A8, 780031ACW-xxx
μPD780032ACW-xxx, 780033ACW-xxx, 780034ACW-xxx, 780031AGC-xxx-AB8
μPD780032AGC-xxx-AB8, 780033AGC-xxx-AB8, 780034AGC-xxx-AB8
μPD780031AGK-xxx-8A8, 780032AGK-xxx-8A8, 780033AGK-xxx-8A8
μPD780034AGK-xxx-8A8, 780031ACW(A)-xxx, 780032ACW(A)-xxx
μPD780033ACW(A)-xxx, 780034ACW(A)-xxx, 780031AGC(A)-xxx-AB8
μPD780032AGC(A)-xxx-AB8, 780033AGC(A)-xxx-AB8, 780034AGC(A)-xxx-AB8
μPD780031AGK(A)-xxx-8A8, 780032AGK(A)-xxx-8A8, 780033AGK(A)-xxx-8A8
μPD780034AGK(A)-xxx-8A8, 780031AYCW-xxx, 780032AYCW-xxx, 780033AYCW-xxx
μPD780034AYCW-xxx, 780031AYGC-xxx-AB8, 780032AYGC-xxx-AB8
μPD780033AYGC-xxx-AB8, 780034AYGC-xxx-AB8, 780031AYGK-xxx-8A8
μPD780032AYGK-xxx-8A8, 780033AYGK-xxx-8A8, 780034AYGK-xxx-8A8
μPD780031AYCW(A)-xxx, 780032AYCW(A)-xxx, 780033AYCW(A)-xxx
μPD780034AYCW(A)-xxx, 780031AYGC(A)-xxx-AB8, 780032AYGC(A)-xxx-AB8
μPD780033AYGC(A)-xxx-AB8, 780034AYGC(A)-xxx-AB8, 780031AYGK(A)-xxx-8A8
μPD780032AYGK(A)-xxx-8A8, 780033AYGK(A)-xxx-8A8, 780034AYGK(A)-xxx-8A8

Purchase of NEC I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

- **The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.**
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
- NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
- Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.
- While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
- NEC devices are classified into the following three quality grades:
"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.
 - Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - Specific: Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Regional Information

Some information contained in this document may vary from country to country. Before using any NEC product in your application, please contact the NEC office in your country to obtain a list of authorized representatives and distributors. They will verify:

- Device availability
- Ordering information
- Product release schedule
- Availability of related technical literature
- Development environment specifications (for example, specifications for third-party tools and components, host computers, power plugs, AC supply voltages, and so forth)
- Network requirements

In addition, trademarks, registered trademarks, export restrictions, and other legal issues may also vary from country to country.

NEC Electronics Inc. (U.S.)

Santa Clara, California
Tel: 408-588-6000
800-366-9782
Fax: 408-588-6130
800-729-9288

NEC Electronics (Germany) GmbH

Duesseldorf, Germany
Tel: 0211-65 03 02
Fax: 0211-65 03 490

NEC Electronics (UK) Ltd.

Milton Keynes, UK
Tel: 01908-691-133
Fax: 01908-670-290

NEC Electronics Italiana s.r.l.

Milano, Italy
Tel: 02-66 75 41
Fax: 02-66 75 42 99

NEC Electronics (Germany) GmbH

Benelux Office
Eindhoven, The Netherlands
Tel: 040-2445845
Fax: 040-2444580

NEC Electronics (France) S.A.

Velizy-Villacoublay, France
Tel: 01-30-67 58 00
Fax: 01-30-67 58 99

NEC Electronics (France) S.A.

Spain Office
Madrid, Spain
Tel: 91-504-2787
Fax: 91-504-2860

NEC Electronics (Germany) GmbH

Scandinavia Office
Taebly, Sweden
Tel: 08-63 80 820
Fax: 08-63 80 388

NEC Electronics Hong Kong Ltd.

Hong Kong
Tel: 2886-9318
Fax: 2886-9022/9044

NEC Electronics Hong Kong Ltd.

Seoul Branch
Seoul, Korea
Tel: 02-528-0303
Fax: 02-528-4411

NEC Electronics Singapore Pte. Ltd.

United Square, Singapore 1130
Tel: 65-253-8311
Fax: 65-250-3583

NEC Electronics Taiwan Ltd.

Taipei, Taiwan
Tel: 02-2719-2377
Fax: 02-2719-5951

NEC do Brasil S.A.

Electron Devices Division
Rodovia Presidente Dutra, Km 214
07210-902-Guarulhos-SP Brasil
Tel: 55-11-6465-6810
Fax: 55-11-6465-6829

J99.1

INTRODUCTION

Readers

This manual has been prepared for user engineers who understand the functions of the μ PD780024A, 780034A, 780024AY, and 780034AY Subseries and wish to design and develop application systems and programs for these devices.

μ PD780024A Subseries : μ PD780021A, 780022A, 780023A, 780024A
 μ PD780021A(A), 780022A(A), 780023A(A), 780024A(A)
 μ PD780034A Subseries : μ PD780031A, 780032A, 780033A, 780034A, 78F0034A
 μ PD780031A(A), 780032A(A), 780033A(A), 780034A(A)
 μ PD780024AY Subseries : μ PD780021AY, 780022AY, 780023AY, 780024AY
 μ PD780021AY(A), 780022AY(A), 780023AY(A), 780024AY(A)
 μ PD780034AY Subseries : μ PD780031AY, 780032AY, 780033AY, 780034AY, 78F0034AY
 μ PD780031AY(A), 780032AY(A), 780033AY(A), 780034AY(A)

Purpose

This manual is intended to provide users an understanding of the functions described in the organization below.

Organization

The μ PD780024A, 780034A, 780024AY, and 780034AY Subseries manual is separated into two parts: this manual and the instructions edition (common to the 78K/0 Series).

**μ PD780024A, 780034A, 780024AY, 780034AY
Subseries User's Manual
(This Manual)**

**78K/0 Series
User's Manual
Instructions**

- Pin functions
- Internal block functions
- Interrupt
- Other on-chip peripheral functions
- CPU functions
- Instruction set
- Explanation of each instruction

How To Read This Manual Before reading this manual, you should have general knowledge of electric and logic circuits and microcontrollers.

- For readers who use this as an (A) product:
 - Standard products differ from (A) products in their quality grade only. Re-read the product name as indicated below if your products is an (A) product.

μ PD780021A → μ PD780021A(A)	μ PD780021AY → μ PD780021AY(A)
μ PD780022A → μ PD780022A(A)	μ PD780022AY → μ PD780022AY(A)
μ PD780023A → μ PD780023A(A)	μ PD780023AY → μ PD780023AY(A)
μ PD780024A → μ PD780024A(A)	μ PD780024AY → μ PD780024AY(A)
μ PD780031A → μ PD780031A(A)	μ PD780031AY → μ PD780031AY(A)
μ PD780032A → μ PD780032A(A)	μ PD780032AY → μ PD780032AY(A)
μ PD780033A → μ PD780033A(A)	μ PD780033AY → μ PD780033AY(A)
μ PD780034A → μ PD780034A(A)	μ PD780034AY → μ PD780034AY(A)

- To gain a general understanding of functions:
 - Read this manual in the order of the contents.
- How to interpret the register format:
 - For the bit number enclosed in square, the bit name is defined as a reserved word in RA78K/0, and in CC78K/0, already defined in the header file named sfrbit.h.
- To check the details of a register when you know the register name.
 - Refer to **APPENDIX D REGISTER INDEX**.

Caution Examples in this manual employ the “standard” quality grade for general electronics. When using examples in this manual for the “special” quality grade, review the quality grade of each part and/or circuit actually used.

Differences between μ PD780024A, 780034A, 780024AY, and 780034AY Subseries

The configuration of the serial interface and the resolution of the A/D converter differ on μ PD780024A, 780034A, 780024AY, and 780034AY subseries products.

Item		Subseries	μ PD780024A	μ PD780034A	μ PD780024AY	μ PD780034AY
Configuration of serial interface	3-wire serial I/O mode		2ch (SIO30, SIO31)		1ch (SIO30 only)	
	UART mode		1ch		1ch	
	I ² C bus mode		None		1ch	
A/D converter			8-bit resolution	10-bit resolution	8-bit resolution	10-bit resolution

Chapter Organization This manual divides the descriptions for the subseries into different chapters as shown below. Read only the chapters related to the device you use.

Chapter	μ PD780024A Subseries	μ PD780034A Subseries	μ PD780024AY Subseries	μ PD780034AY Subseries
Chapter 1 Outline (μ PD780024A, 780034A Subseries)	○	○	—	—
Chapter 2 Outline (μ PD780024AY, 780034AY Subseries)	—	—	○	○
Chapter 3 Pin Function (μ PD780024A, 780034A Subseries)	○	○	—	—
Chapter 4 Pin Function (μ PD780024AY, 780034AY Subseries)	—	—	○	○
Chapter 5 CPU Architecture	○	○	○	○
Chapter 6 Port Functions	○	○	○	○
Chapter 7 Clock Generator	○	○	○	○
Chapter 8 16-Bit Timer/Event Counter	○	○	○	○
Chapter 9 8-Bit Timer/Event Counter	○	○	○	○
Chapter 10 Watch Timer	○	○	○	○
Chapter 11 Watchdog Timer	○	○	○	○
Chapter 12 Clock Output/Buzzer Output Control Circuits	○	○	○	○
Chapter 13 8-Bit A/D Converter (μ PD780024A, 780024AY Subseries)	○	—	○	—
Chapter 14 10-Bit A/D Converter (μ PD780034A, 780034AY Subseries)	—	○	—	○
Chapter 15 Serial Interface outline	○	○	○	○
Chapter 16 Serial Interface (UART0)	○	○	○	○
Chapter 17 Serial Interface (SIO3)	○	○	○	○
Chapter 18 Serial Interface (IIC0) (μ PD780024AY, 780034AY Subseries only)	—	—	○	○
Chapter 19 Interrupt Functions	○	○	○	○
Chapter 20 External Device Expansion Function	○	○	○	○
Chapter 21 Standby Function	○	○	○	○
Chapter 22 Reset Function	○	○	○	○
Chapter 23 μ PD78F0034A, 78F0034AY	○	○	○	○
Chapter 24 Instruction Set	○	○	○	○

Legend

- Data representation weight : High digits on the left and low digits on the right
- Active low representations : $\overline{\text{xxx}}$ (line over the pin and signal names)
- Note** : Description of note in the text.
- Caution** : Information requiring particular attention
- Remark** : Additional explanatory material
- Numerical representations : Binary ... xxxx or xxxxB
 Decimal ... xxxx
 Hexadecimal ... xxxxH

Related Documents The related documents indicated in this publication may include preliminary versions. However, preliminary versions are not marked as such.

• **Related documents for μ PD780024A Subseries**

Document Name		Document No.	
		Japanese	English
μ PD780021A, 780022A, 780023A, 780024A Data Sheet		U14042J	U14042E
μ PD780024A, 780034A, 780024AY, 780034AY Subseries User's Manual		U14046J	This manual
78K/0 Series User's Manual -Instructions		U12326J	U12326E
78K/0 Series Instruction Application Table		U10903J	—
78K/0 Series Instruction Set		U10904J	—
78K/0 Series Application Note	Basics (I)	U12704J	U12704E

• **Related documents for μ PD780024AY Subseries**

Document Name		Document No.	
		Japanese	English
μ PD780021AY, 780022AY, 780023AY, 780024AY Data Sheet		U14043J	U14043E
μ PD780024A, 780034A, 780024AY, 780034AY Subseries User's Manual		U14046J	This manual
78K/0 Series User's Manual -Instructions		U12326J	U12326E
78K/0 Series Instruction Application Table		U10903J	—
78K/0 Series Instruction Set		U10904J	—
78K/0 Series Application Note	Basics (I)	U12704J	U12704E

• **Related documents for μ PD780034A Subseries**

Document Name		Document No.	
		Japanese	English
μ PD780031A, 780032A, 780033A, 780034A Data Sheet		U14044J	U14044E
μ PD78F0034A Data Sheet		U14040J	U14040E
μ PD780024A, 780034A, 780024AY, 780034AY Subseries User's Manual		U14046J	This manual
78K/0 Series User's Manual -Instructions		U12326J	U12326E
78K/0 Series Instruction Applications Table		U10903J	—
78K/0 Series Instruction Set		U10904J	—
78K/0 Series Application Note	Basics (I)	U12704J	U12704E

Caution The above documents are subject to change without prior notice. Be sure to use the latest version document when starting design.

- **Related documents for μ PD780034AY Subseries**

Document Name		Document No.	
		Japanese	English
μ PD780031AY, 780032AY, 780033AY, 780034AY Data Sheet		U14045J	U14045E
μ PD78F0034AY Data Sheet		U14041J	U14041E
μ PD780024A, 780034A, 780024AY, 780034AY Subseries User's Manual		U14046J	This manual
78K/0 Series User's Manual -Instructions		U12326J	U12326E
78K/0 Series Instruction Applications Table		U10903J	—
78K/0 Series Instruction Set		U10904J	—
78K/0 Series Application Note	Basics (I)	U12704J	U12704E

- **Related documents for development tool (User's Manuals)**

Document Name		Document No.	
		Japanese	English
RA78K0 Assembler Package	Operation	U11802J	U11802E
	Language	U11801J	U11801E
	Structured Assembly Language	U11789J	U11789E
RA78K Series Structured Assembler Preprocessor		U12323J	EEU-1402
CC78K0 C Compiler	Operation	U11517J	U11517E
	Language	U11518J	U11518E
CC78K0 C Compiler Application Note	Programming Know-how	U13034J	U13034E
IE-78K0-NS		U13731J	To be prepared
IE-78001-R-A		To be prepared	To be prepared
IE-78K0-R-EX1		To be prepared	To be prepared
IE-780034-NS-EM1		To be prepared	To be prepared
EP-78240		EEU-986	U10332E
EP-78012GK-R		EEU-5012	EEU-1538
SM78K0 System Simulator Windows™ Based	Reference	U10181J	U10181E
SM78K Series System Simulator	External Part User Open Interface Specifications	U10092J	U10092E
ID78K0-NS Integrated Debugger Windows Based	Reference	U12900J	U12900E
ID78K0 Integrated Debugger EWS Based	Reference	U11151J	—
ID78K0 Integrated Debugger PC Based	Reference	U11539J	U11539E
ID78K0 Integrated Debugger Windows Based	Guide	U11649J	U11649E

Caution The above documents are subject to change without prior notice. Be sure to use the latest version document when starting design.

- **Related documents for embedded software (User's Manual)**

Document Name		Document No.	
		Japanese	English
78K/0 Series Real-Time OS	Fundamentals	U11537J	U11537E
	Installation	U11536J	U11536E
78K/0 Series OS MX78K0	Fundamental	U12257J	U12257E

- **Other Documents**

Document Name	Document No.	
	Japanese	English
SEMICONDUCTOR SELECTION GUIDE Product & Packages (CD-ROM)	X13769X	
Semiconductor Device Mounting Technology Manual	C10535J	C10535E
Quality Grades on NEC Semiconductor Devices	C11531J	C11531E
NEC Semiconductor Device Reliability/Quality Control System	C10983J	C10983E
Guide to Prevent Damage for Semiconductor Devices by Electrostatic Discharge (ESD)	C11892J	C11892E
Guide to Quality Assurance for Semiconductor Devices	U12769J	—
Microcomputer Related Product Series Guide - Third Party Manufacturers	U11416J	—

Caution The above documents are subject to change without prior notice. Be sure to use the latest version document when starting design.

CONTENTS

CHAPTER 1 OUTLINE (μPD780024A, 780034A SUBSERIES)	29
1.1 Features	29
1.2 Applications	30
1.3 Ordering Information	31
1.4 Quality Grade	33
1.5 Pin Configuration (Top View)	35
1.6 78K/0 Series Expansion	39
1.7 Block Diagram	41
1.8 Outline of Function	42
1.9 Difference between Standard Grade and Special Grade	43
1.10 Mask Options	43
CHAPTER 2 OUTLINE (μPD780024AY, 780034AY SUBSERIES)	45
2.1 Features	45
2.2 Applications	46
2.3 Ordering Information	47
2.4 Quality Grade	49
2.5 Pin Configuration (Top View)	51
2.6 78K/0 Series Expansion	55
2.7 Block Diagram	57
2.8 Outline of Function	58
2.9 Difference between Standard Grade and Special Grade	59
2.10 Mask Options	59
CHAPTER 3 PIN FUNCTION (μPD780024A, 780034A SUBSERIES)	61
3.1 Pin Function List	61
3.2 Description of Pin Functions	64
3.2.1 P00 to P03 (Port 0)	64
3.2.2 P10 to P17 (Port 1)	64
3.2.3 P20 to P25 (Port 2)	65
3.2.4 P30 to P36 (Port 3)	65
3.2.5 P40 to P47 (Port 4)	66
3.2.6 P50 to P57 (Port 5)	66
3.2.7 P64 to P67 (Port 6)	66
3.2.8 P70 to P75 (Port 7)	67
3.2.9 AVREF	67
3.2.10 AVDD	67
3.2.11 AVSS	67
3.2.12 $\overline{\text{RESET}}$	68
3.2.13 X1 and X2	68
3.2.14 XT1 and XT2	68
3.2.15 VDD0 and VDD1	68

3.2.16	V _{SS0} and V _{SS1}	68
3.2.17	V _{PP} (flash memory versions only)	68
3.2.18	IC (mask ROM version only)	68
3.3	Pin Input/output Circuits and Recommended Connection of Unused Pins	69
CHAPTER 4 PIN FUNCTION (μPD780024AY, 780034AY SUBSERIES)		73
4.1	Pin Function List	73
4.2	Description of Pin Functions	76
4.2.1	P00 to P03 (Port 0)	76
4.2.2	P10 to P17 (Port 1)	76
4.2.3	P20 to P25 (Port 2)	77
4.2.4	P30 to P36 (Port 3)	77
4.2.5	P40 to P47 (Port 4)	78
4.2.6	P50 to P57 (Port 5)	78
4.2.7	P64 to P67 (Port 6)	78
4.2.8	P70 to P75 (Port 7)	79
4.2.9	AV _{REF}	79
4.2.10	AV _{DD}	79
4.2.11	AV _{SS}	79
4.2.12	$\overline{\text{RESET}}$	80
4.2.13	X1 and X2	80
4.2.14	XT1 and XT2	80
4.2.15	V _{DD0} and V _{DD1}	80
4.2.16	V _{SS0} and V _{SS1}	80
4.2.17	V _{PP} (flash memory versions only)	80
4.2.18	IC (Mask ROM version only)	80
4.3	Pin Input/output Circuits and Recommended Connection of Unused Pins	81
CHAPTER 5 CPU ARCHITECTURE		85
5.1	Memory Spaces	85
5.1.1	Internal program memory space	90
5.1.2	Internal data memory space	92
5.1.3	Special Function Register (SFR) area	92
5.1.4	External memory space	92
5.1.5	Data memory addressing	93
5.2	Processor Registers	98
5.2.1	Control registers	98
5.2.2	General registers	101
5.2.3	Special Function Register (SFR)	102
5.3	Instruction Address Addressing	106
5.3.1	Relative addressing	106
5.3.2	Immediate addressing	107
5.3.3	Table indirect addressing	108
5.3.4	Register addressing	109
5.4	Operand Address Addressing	110
5.4.1	Implied addressing	110

5.4.2	Register addressing	111
5.4.3	Direct addressing	112
5.4.4	Short direct addressing	113
5.4.5	Special function register (SFR) addressing	115
5.4.6	Register indirect addressing	116
5.4.7	Based addressing	117
5.4.8	Based indexed addressing	118
5.4.9	Stack addressing	118
CHAPTER 6 PORT FUNCTIONS		119
6.1	Port Functions	119
6.2	Port Configuration	122
6.2.1	Port 0	122
6.2.2	Port 1	123
6.2.3	Port 2	124
6.2.4	Port 3 (μ PD780024A, 780034A Subseries)	125
6.2.5	Port 3 (μ PD780024AY, 780034AY Subseries)	127
6.2.6	Port 4	130
6.2.7	Port 5	131
6.2.8	Port 6	132
6.2.9	Port 7	133
6.3	Port Function Control Registers	134
6.4	Port Function Operations	138
6.4.1	Writing to input/output port	138
6.4.2	Reading from input/output port	138
6.4.3	Operations on input/output port	138
6.5	Selection of Mask Option	139
CHAPTER 7 CLOCK GENERATOR		141
7.1	Clock Generator Functions	141
7.2	Clock Generator Configuration	141
7.3	Clock Generator Control Register	143
7.4	System Clock Oscillator	145
7.4.1	Main system clock oscillator	145
7.4.2	Subsystem clock oscillator	146
7.4.3	Scaler	149
7.4.4	When no subsystem clocks are used	149
7.5	Clock Generator Operations	150
7.5.1	Main system clock operations	151
7.5.2	Subsystem clock operations	152
7.6	Changing System Clock and CPU Clock Settings	152
7.6.1	Time required for switchover between system clock and CPU clock	152
7.6.2	System clock and CPU clock switching procedure	154

CHAPTER 8 16-BIT TIMER/EVENT COUNTER	155
8.1 Outline of Timer Integrated in μPD780024A, 780034A, 780024AY, 780034AY Subseries	155
8.2 16-Bit Timer/Event Counter Functions	156
8.3 16-Bit Timer/Event Counter Configuration	157
8.4 Registers to Control 16-Bit Timer/Event Counter	159
8.5 16-Bit Timer/Event Counter Operations	165
8.5.1 Interval timer operations	165
8.5.2 PPG output operations	167
8.5.3 Pulse width measurement operations	168
8.5.4 External event counter operation	175
8.5.5 Square-wave output operation	176
8.5.6 One-shot pulse output operation	178
8.6 16-Bit Timer/Event Counter Operating Precautions	181
CHAPTER 9 8-BIT TIMER/EVENT COUNTER	185
9.1 8-Bit Timer/Event Counter Functions	185
9.2 8-Bit Timer/Event Counter Configurations	187
9.3 Registers to Control 8-Bit Timer/Event Counter	188
9.4 8-Bit Timer/Event Counter Operations	192
9.4.1 8-bit interval timer operation	192
9.4.2 External event counter operation	196
9.4.3 Square-wave output (8-bit resolution) operation	197
9.4.4 8-bit PWM output operation	198
9.4.5 Interval timer (16-bit) operations	201
9.5 8-Bit Timer/Event Counter Cautions	202
CHAPTER 10 WATCH TIMER	205
10.1 Watch Timer Functions	205
10.2 Watch Timer Configuration	206
10.3 Register to Control Watch Timer	207
10.4 Watch Timer Operations	208
10.4.1 Watch timer operation	208
10.4.2 Interval timer operation	208
CHAPTER 11 WATCHDOG TIMER	211
11.1 Watchdog Timer Functions	211
11.2 Watchdog Timer Configuration	213
11.3 Registers to Control the Watchdog Timer	213
11.4 Watchdog Timer Operations	217
11.4.1 Watchdog timer operation	217
11.4.2 Interval timer operation	218

CHAPTER 12	CLOCK OUTPUT/BUZZER OUTPUT CONTROL CIRCUITS	219
12.1	Clock Output/Buzzer Output Control Circuit Functions	219
12.2	Clock Output/Buzzer Output Control Circuit Configuration	220
12.3	Register to Control Clock Output/Buzzer Output Control Circuit	220
12.4	Clock Output/Buzzer Output Control Circuit Operations	223
12.4.1	Operation as clock output	223
12.4.2	Operation as buzzer output	223
CHAPTER 13	8-BIT A/D CONVERTER (μPD780024A, 780024AY SUBSERIES)	225
13.1	A/D Converter Functions	225
13.2	A/D Converter Configuration	226
13.3	Registers to Control A/D Converter	228
13.4	A/D Converter Operations	232
13.4.1	Basic operations of A/D converter	232
13.4.2	Input voltage and conversion results	234
13.4.3	A/D converter operation mode	235
13.5	A/D Converter Cautions	238
CHAPTER 14	10-BIT A/D CONVERTER (μPD780034A, 780034AY SUBSERIES)	243
14.1	A/D Converter Functions	243
14.2	A/D Converter Configuration	244
14.3	Registers to Control A/D Converter	245
14.4	A/D Converter Operation	248
14.4.1	Basic operations of A/D converter	248
14.4.2	Input voltage and conversion results	250
14.4.3	A/D converter operation mode	251
14.5	A/D Converter Cautions	253
CHAPTER 15	SERIAL INTERFACE OUTLINE	257
CHAPTER 16	SERIAL INTERFACE (UART0).....	259
16.1	Serial Interface Functions	259
16.2	Serial Interface Configuration	261
16.3	Registers to Control Serial Interface	262
16.4	Serial Interface Operations	266
16.4.1	Operation stop mode	266
16.4.2	Asynchronous serial interface (UART) mode	267
16.4.3	Infrared data transfer mode	279
CHAPTER 17	SERIAL INTERFACE (SIO3)	283
17.1	Serial Interface Functions	283
17.2	Serial Interface Configuration	284
17.3	Register to Control Serial Interface	285

17.4 Serial Interface Operations	289
17.4.1 Operation stop mode	289
17.4.2 3-wire serial I/O mode	290
CHAPTER 18 SERIAL INTERFACE (IIC0) (μPD780024AY, 780034AY SUBSERIES ONLY)	293
18.1 Serial Interface Functions	293
18.2 Serial Interface Configuration	296
18.3 Registers to Control Serial Interface	297
18.4 I²C Bus Mode Functions	306
18.4.1 Pin configuration	306
18.5 I²C Bus Definitions and Control Methods	307
18.5.1 Start conditions	307
18.5.2 Addresses	308
18.5.3 Transfer direction specification	308
18.5.4 Acknowledge ($\overline{\text{ACK}}$) signal	309
18.5.5 Stop condition	310
18.5.6 Wait signal ($\overline{\text{WAIT}}$)	311
18.5.7 I ² C interrupt requests (INTIIC0)	313
18.5.8 Interrupt request (INTIIC0) generation timing and wait control	332
18.5.9 Address match detection method	333
18.5.10 Error detection	333
18.5.11 Extension code	333
18.5.12 Arbitration	334
18.5.13 Wake up function	335
18.5.14 Communication reservation	336
18.5.15 Other cautions	338
18.5.16 Communication operations	339
18.6 Timing Charts	341
CHAPTER 19 INTERRUPT FUNCTIONS	349
19.1 Interrupt Function Types	349
19.2 Interrupt Sources and Configuration	349
19.3 Interrupt Function Control Registers	353
19.4 Interrupt Servicing Operations	359
19.4.1 Non-maskable interrupt request acknowledge operation	359
19.4.2 Maskable interrupt acknowledge operation	362
19.4.3 Software interrupt request acknowledge operation	364
19.4.4 Nesting interrupt servicing	365
19.4.5 Interrupt request hold	368
CHAPTER 20 EXTERNAL DEVICE EXPANSION FUNCTION	369
20.1 External Device Expansion Function	369
20.2 External Device Expansion Function Control Register	372
20.3 External Device Expansion Function Timing	374
20.4 Example of Connection with Memory	379

CHAPTER 21 STANDBY FUNCTION	381
21.1 Standby Function and Configuration	381
21.1.1 Standby function	381
21.1.2 Standby function control register	382
21.2 Standby Function Operations	383
21.2.1 HALT mode	383
21.2.2 STOP mode	386
 CHAPTER 22 RESET FUNCTION	 389
22.1 Reset Function	389
 CHAPTER 23 μPD78F0034A, 78F0034AY	 393
23.1 Memory Size Switching Register	394
23.2 Flash Memory Programming	395
23.2.1 Selection of transmission method	395
23.2.2 Flash memory programming function	396
23.2.3 Connection of Flashpro II and Flashpro III	397
 CHAPTER 24 INSTRUCTION SET	 399
24.1 Legends Used in Operation List	400
24.1.1 Operand identifiers and specification methods	400
24.1.2 Description of "operation" column	401
24.1.3 Description of "flag operation" column	401
24.2 Operation List	402
24.3 Instructions Listed by Addressing Type	410
 APPENDIX A DIFFERENCES BETWEEN μPD78014H, 78018F, 780024A, AND 780034A SUBSERIES	 415
 APPENDIX B DEVELOPMENT TOOLS	 417
B.1 Language Processing Software	420
B.2 Flash Memory Writing Tools	421
B.3 Debugging Tools	422
B.3.1 Hardware	422
B.3.2 Software	424
B.4 System Upgrade from Former In-circuit Emulator for 78K/0 Series to IE-78001-R-A	426
 APPENDIX C EMBEDDED SOFTWARE	 431
 APPENDIX D REGISTER INDEX	 433
D.1 Register Index (In Alphabetical Order with Respect to Register Names)	433
D.2 Register Index (In Alphabetical Order with Respect to Register Symbol)	436

LIST OF FIGURES (1/6)

Figure No.	Title	Page
3-1	Pin Input/Output Circuit List	71
4-1	Pin Input/Output Circuit List	83
5-1	Memory Map (μ PD780021A, 780031A, 780021AY, 780031AY)	85
5-2	Memory Map (μ PD780022A, 780032A, 780022AY, 780032AY)	86
5-3	Memory Map (μ PD780023A, 780033A, 780023AY, 780033AY)	87
5-4	Memory Map (μ PD780024A, 780034A, 780024AY, 780034AY)	88
5-5	Memory Map (μ PD78F0034A, 78F0034AY)	89
5-6	Data Memory Addressing (μ PD780021A, 780031A, 780021AY, 780031AY)	93
5-7	Data Memory Addressing (μ PD780022A, 780032A, 780022AY, 780032AY)	94
5-8	Data Memory Addressing (μ PD780023A, 780033A, 780023AY, 780033AY)	95
5-9	Data Memory Addressing (μ PD780024A, 780034A, 780024AY, 780034AY)	96
5-10	Data Memory Addressing (μ PD78F0034A, 78F0034AY)	97
5-11	Program Counter Format	98
5-12	Program Status Word Format	98
5-13	Stack Pointer Format	100
5-14	Data To Be Saved to Stack Memory	100
5-15	Data To Be Restored from Stack Memory	100
5-16	General Register Configuration	101
6-1	Port Types	119
6-2	P00 to P03 Block Diagram	123
6-3	P10 to P17 Block Diagram	123
6-4	P20 to P25 Block Diagram	124
6-5	P30 to P33 Block Diagram (μ PD780024A, 780034A Subseries)	125
6-6	P34 to P36 Block Diagram (μ PD780024A, 780034A Subseries)	126
6-7	P30 and P31 Block Diagram (μ PD780024AY, 780034AY Subseries)	128
6-8	P32 and P33 Block Diagram (μ PD780024AY, 780034AY Subseries)	128
6-9	P34 to P36 Block Diagram (μ PD780024AY, 780034AY Subseries)	129
6-10	P40 to P47 Block Diagram	130
6-11	Falling Edge Detection Circuit Block Diagram	130
6-12	P50 to P57 Block Diagram	131
6-13	P64 to P67 Block Diagram	132
6-14	P70 to P75 Block Diagram	133
6-15	Port Mode Register (PM0, PM2 to PM7) Format	135
6-16	Pull-Up Resistor Option Register (PU0, PU2 to PU7) Format	137
7-1	Clock Generator Block Diagram	142
7-2	Subsystem Clock Feedback Resistor	143
7-3	Processor Clock Control Register (PCC) Format	144
7-4	External Circuit of Main System Clock Oscillator	145
7-5	External Circuit of Subsystem Clock Oscillator	146
7-6	Examples of Incorrect Oscillator Connection	147

LIST OF FIGURES (2/6)

Figure No.	Title	Page
7-7	Main System Clock Stop Function	151
7-8	System Clock and CPU Clock Switching	154
8-1	16-Bit Timer/Event Counter Block Diagram	157
8-2	16-Bit Timer Mode Control Register 0 (TMC0) Format	160
8-3	Capture/Compare Control Register 0 (CRC0) Format	161
8-4	16-Bit Timer Output Control Register 0 (TOC0) Format	162
8-5	Prescaler Mode Register 0 (PRM0) Format	163
8-6	Port Mode Register 7 (PM7) Format	164
8-7	Control Register Settings for Interval Timer Operation	165
8-8	Interval Timer Configuration Diagram	166
8-9	Timing of Interval Timer Operation	166
8-10	Control Register Settings for PPG Output Operation	167
8-11	Control Register Settings for Pulse Width Measurement with Free-Running Counter and One Capture Register	168
8-12	Configuration Diagram for Pulse Width Measurement by Free-Running Counter	169
8-13	Timing of Pulse Width Measurement Operation by Free-Running Counter and One Capture Register (with Both Edges Specified)	169
8-14	Control Register Settings for Measurement of Two Pulse Widths with Free-Running Counter	170
8-15	Capture Operation with Rising Edge Specified	171
8-16	Timing of Pulse Width Measurement Operation with Free-Running Counter (with Both Edges Specified)	171
8-17	Control Register Settings for Pulse Width Measurement with Free-Running Counter and Two Capture Registers	172
8-18	Timing of Pulse Width Measurement Operation by Free-Running Counter and Two Capture Registers (with Rising Edge Specified)	173
8-19	Control Register Settings for Pulse Width Measurement by Means of Restart	174
8-20	Timing of Pulse Width Measurement Operation by Means of Restart (with Rising Edge Specified)	174
8-21	Control Register Settings in External Event Counter Mode	175
8-22	External Event Counter Configuration Diagram	176
8-23	External Event Counter Operation Timings (with Rising Edge Specified)	176
8-24	Control Register Settings in Square-Wave Output Mode	177
8-25	Square-Wave Output Operation Timing	178
8-26	Control Register Settings for One-Shot Pulse Output Operation Using Software Trigger	179
8-27	Timing of One-Shot Pulse Output Operation Using Software Trigger	180
8-28	16-Bit Timer/Counter 0 (TM0) Start Timing	181
8-29	Timings after Change of Compare Register during Timer Count Operation	181
8-30	Capture Register Data Retention Timing	182
8-31	Operation Timing of OVF0 Flag	183
9-1	8-Bit Timer/Event Counter 50 Block Diagram	186
9-2	8-Bit Timer/Event Counter 51 Block Diagram	186
9-3	Timer Clock Select Register 50 (TCL50) Format	188

LIST OF FIGURES (3/6)

Figure No.	Title	Page
9-4	Timer Clock Select Register 51 (TCL51) Format	189
9-5	8-Bit Timer Mode Control Register 5n (TMC5n) Format	190
9-6	Port Mode Register 7 (PM7) Format	191
9-7	Interval Timer Operation Timings	193
9-8	External Event Counter Operation Timing (with Rising Edge Specified)	196
9-9	Square-Wave Output Operation Timing	197
9-10	PWM Output Operation Timing	199
9-11	Timing of Operation by Change of CR5n	200
9-12	16-Bit Resolution Cascade Connection Mode	202
9-13	8-Bit Timer/Counter Start Timing	202
9-14	Timing after Compare Register Transition during Timer Count Operation	203
10-1	Watch Timer Block Diagram	205
10-2	Watch Timer Operation Mode Register (WTM) Format	207
10-3	Operation Timing of Watch Timer/Interval Timer	209
11-1	Watchdog Timer Block Diagram	211
11-2	Watchdog Timer Clock Select Register (WDCS) Format	214
11-3	Watchdog Timer Mode Register (WDTM) Format	215
11-4	Oscillation Stabilization Time Select Register (OSTS) Format	216
12-1	Clock Output/Buzzer Output Control Circuit Block Diagram	219
12-2	Clock Output Select Register (CKS) Format	221
12-3	Port Mode Register 7 (PM7) Format	222
12-4	Remote Control Output Application Example	223
13-1	8-Bit A/D Converter Block Diagram	225
13-2	A/D Converter Mode Register 0 (ADM0) Format	229
13-3	Analog Input Channel Specification Register 0 (ADS0) Format	230
13-4	External Interrupt Rising Edge Enable Register (EGP), External Interrupt Falling Edge Enable Register (EGN) Format	231
13-5	Basic Operation of 8-Bit A/D Converter	233
13-6	Relationship between Analog Input Voltage and A/D Conversion Result	234
13-7	A/D Conversion by Hardware Start (When Falling Edge Is Specified)	236
13-8	A/D Conversion by Software Start	237
13-9	Example of Method of Reducing Current Consumption in Standby Mode	238
13-10	Analog Input Pin Connection	239
13-11	A/D Conversion End Interrupt Request Generation Timing	240
13-12	AV _{DD} Pin Connection	241
14-1	10-Bit A/D Converter Block Diagram	243
14-2	A/D Converter Mode Register 0 (ADM0) Format	246
14-3	Analog Input Channel Specification Register 0 (ADS0) Format	247

LIST OF FIGURES (4/6)

Figure No.	Title	Page
14-4	External Interrupt Rising Edge Enable Register (EGP), External Interrupt Falling Edge Enable Register (EGN) Format	247
14-5	Basic Operation of 10-Bit A/D Converter	249
14-6	Relationship between Analog Input Voltage and A/D Conversion Result	250
14-7	A/D Conversion by Hardware Start (When Falling Edge Is Specified)	251
14-8	A/D Conversion by Software Start	252
14-9	Example of Method of Reducing Current Consumption in Standby Mode	253
14-10	Analog Input Pin Connection	254
14-11	A/D Conversion End Interrupt Request Generation Timing	255
14-12	AV _{DD} Pin Connection	256
16-1	Serial Interface (UART0) Block Diagram	260
16-2	Baud Rate Generator Block Diagram	260
16-3	Asynchronous Serial Interface Mode Register 0 (ASIM0) Format	263
16-4	Asynchronous Serial Interface Status Register 0 (ASIS0) Format	264
16-5	Baud Rate Generator Control Register 0 (BRGC0) Format	265
16-6	Error Tolerance (when k = 0), Including Sampling Errors	273
16-7	Format of Transmit/Receive Data in Asynchronous Serial Interface	274
16-8	Timing of Asynchronous Serial Interface Transmit Completion Interrupt Request	276
16-9	Timing of Asynchronous Serial Interface Receive Completion Interrupt Request	277
16-10	Receive Error Timing	278
16-11	Data Format Comparison between Infrared Data Transfer Mode and UART Mode	279
17-1	Serial Interface (SIO3n) Block Diagram	283
17-2	Serial Operation Mode Register 30 (CSIM30) Format	286
17-3	Serial Operation Mode Register 31 (CSIM31) Format	288
17-4	Timing of 3-Wire Serial I/O Mode	292
18-1	Serial Interface (IIC0) Block Diagram	294
18-2	Serial Bus Configuration Example Using I ² C Bus	295
18-3	IIC Control Register 0 (IICC0) Format	298
18-4	IIC Status Register 0 (IICS0) Format	301
18-5	IIC Transfer Clock Select Register 0 (IICCL0) Format	304
18-6	Pin Configuration Diagram	306
18-7	I ² C Bus Serial Data Transfer Timing	307
18-8	Start Conditions	307
18-9	Address	308
18-10	Transfer Direction Specification	308
18-11	ACK Signal	309
18-12	Stop Condition	310
18-13	Wait Signal	311
18-14	Arbitration Timing Example	334
18-15	Communication Reservation Timing	337
18-16	Timing for Accepting Communication Reservations	337

LIST OF FIGURES (5/6)

Figure No.	Title	Page
18-17	Communication Reservation Protocol	338
18-18	Master Operation Flow Chart	339
18-19	Slave Operation Flow Chart	340
18-20	Example of Master to Slave Communication (When 9-clock Wait Is Selected for Both Master and Slave)	342
18-21	Example of Slave to Master Communication (When 9-clock Wait Is Selected for Both Master and Slave)	345
19-1	Basic Configuration of Interrupt Function	351
19-2	Interrupt Request Flag Register (IF0L, IF0H, IF1L) Format	354
19-3	Interrupt Mask Flag Register (MK0L, MK0H, MK1L) Format	355
19-4	Priority Specification Flag Register (PR0L, PR0H, PR1L) Format	356
19-5	External Interrupt Rising Edge Enable Register (EGP), External Interrupt Falling Edge Enable Register (EGN) Format	357
19-6	Program Status Word Format	358
19-7	Non-Maskable Interrupt Request Generation to Acknowledge Flowchart	360
19-8	Non-Maskable Interrupt Request Acknowledge Timing	360
19-9	Non-Maskable Interrupt Request Acknowledge Operation	361
19-10	Interrupt Request Acknowledge Processing Algorithm	363
19-11	Interrupt Request Acknowledge Timing (Minimum Time)	364
19-12	Interrupt Request Acknowledge Timing (Maximum Time)	364
19-13	Nesting Examples	366
19-14	Interrupt Request Hold	368
20-1	Memory Map When Using External Device Function	370
20-2	Memory Expansion Mode Register (MEM) Format	372
20-3	Memory Expansion Wait Setting Register (MM) Format	373
20-4	Instruction Fetch from External Memory	375
20-5	External Memory Read Timing	376
20-6	External Memory Write Timing	377
20-7	External Memory Read Modify Write Timing	378
20-8	Connection Example of μ PD780024A and Memory	379
21-1	Oscillation Stabilization Time Select Register (OSTS) Format	382
21-2	HALT Mode Release by Interrupt Request Generation	384
21-3	HALT Mode Release by $\overline{\text{RESET}}$ Input	385
21-4	STOP Mode Release by Interrupt Request Generation	387
21-5	STOP Mode Release by $\overline{\text{RESET}}$ Input	388
22-1	Reset Function Block Diagram	389
22-2	Timing of Reset by $\overline{\text{RESET}}$ Input	390
22-3	Timing of Reset Due to Watchdog Timer Overflow	390
22-4	Timing of Reset in STOP Mode by $\overline{\text{RESET}}$ Input	390

LIST OF FIGURES (6/6)

Figure No.	Title	Page
23-1	Memory Size Switching Register (IMS) Format	394
23-2	Transmission Method Selection Format	396
23-3	Connection of Flashpro II and Flashpro III Using 3-Wire Serial I/O Method	397
23-4	Connection of Flashpro II and Flashpro III Using UART Method	397
23-5	Connection of Flashpro II and Flashpro III Using I ² C Bus Method	398
23-6	Connection of Flashpro II and Flashpro III Using Pseudo 3-wire Serial I/O	398
B-1	Development Tool Configuration	418
B-2	EV-9200GC-64 Package Drawing (for reference only)	427
B-3	EV-9200GC-64 Recommended Board Mounting Pattern (for reference only)	428
B-4	TGK-064SBW Package Drawing (for reference only)	429

LIST OF TABLES (1/3)

Table No.	Title	Page
1-1	Mask Options of Mask ROM Versions	43
2-1	Mask Options of Mask ROM Versions	59
3-1	Pin Input/Output Circuit Types	69
4-1	Pin Input/Output Circuit Types	81
5-1	Internal ROM Capacity	90
5-2	Vector Table	91
5-3	Internal High-Speed RAM Capacity	92
5-4	Internal High-Speed RAM Area	99
5-5	Special Function Register List	103
6-1	Port Functions (μ PD780024A, 780034A Subseries)	120
6-2	Port Functions (μ PD780024AY, 780034AY Subseries)	121
6-3	Port Configuration	122
6-4	Pull-Up Resistor of Port 3 (μ PD780024A, 780034A Subseries)	125
6-5	Pull-Up Resistor of Port 3 (μ PD780024AY, 780034AY Subseries)	127
6-6	Comparison between Mask ROM Version and Flash Memory Version	139
7-1	Clock Generator Configuration	141
7-2	Relationship of CPU Clock and Min. Instruction Execution Time	145
7-3	Maximum Time Required for CPU Clock Switchover	153
8-1	Timer/Event Counter Operations	156
8-2	16-Bit Timer/Event Counter Configuration	157
8-3	TI00/TO0/P70 Pin Valid Edge and CR00, CR01 Capture Trigger	158
8-4	TI01/P71 Pin Valid Edge and CR00 Capture Trigger	158
9-1	8-Bit Timer/Event Counter Configuration	187
10-1	Interval Timer Interval Time	206
10-2	Watch Timer Configuration	206
10-3	Interval Timer Interval Time	208
11-1	Watchdog Timer Runaway Detection Time	212
11-2	Interval Time	212
11-3	Watchdog Timer Configuration	213
11-4	Watchdog Timer Runaway Detection Time	217
11-5	Interval Timer Interval Time	218
12-1	Clock Output/Buzzer Output Control Circuits Configuration	220

LIST OF TABLES (2/3)

Table No.	Title	Page
13-1	A/D Converter Configuration	226
14-1	A/D Converter Configuration	244
15-1	Differences between μ PD780024A, 780034A Subseries and μ PD780024AY, 780034AY Subseries	257
16-1	Serial Interface (UART0) Configuration	261
16-2	Relationship between 5-Bit Counter's Source Clock and "n" Value	271
16-3	Relationship between Main System Clock and Baud Rate	272
16-4	Causes of Receive Errors	278
16-5	Bit Rate and Pulse Width Values	280
17-1	Serial Interface (SIO3n) Configuration	284
18-1	Serial Interface (IIC0) Configuration	296
18-2	INTIIC0 Timing and Wait Control	332
18-3	Extension Code Bit Definitions	333
18-4	Status during Arbitration and Interrupt Request Generation Timing	335
18-5	Wait Periods	336
19-1	Interrupt Source List	350
19-2	Flags Corresponding to Interrupt Request Sources	353
19-3	Times from Generation of Maskable Interrupt until Servicing	362
19-4	Interrupt Request Enabled for Nesting during Interrupt Servicing	365
20-1	Pin Functions in External Memory Expansion Mode	369
20-2	State of Port 4 to 6 Pins in External Memory Expansion Mode	369
21-1	HALT Mode Operating Statuses	383
21-2	Operation after HALT Mode Release	385
21-3	STOP Mode Operating Status	386
21-4	Operation after STOP Mode Release	388
22-1	Hardware Statuses after Reset	391
23-1	Differences among μ PD78F0034A and Mask ROM Versions	393
23-2	Memory Size Switching Register Settings	394
23-3	Transmission Method List	395
23-4	Main Functions of Flash Memory Programming	396
24-1	Operand Identifiers and Specification Methods	400

LIST OF TABLES (3/3)

Table No.	Title	Page
A-1	Major Differences between μ PD78014H, 78018F, 780024A, and 780034A Subseries	415
B-1	System Upgrade Method from Former In-Circuit Emulator for 78K/0 Series To the IE-78001-R-A	426

CHAPTER 1 OUTLINE (μ PD780024A, 780034A SUBSERIES)

1.1 Features

- Internal Memory

Part Number \ Type	Program Memory (ROM/Flash memory)	Data Memory (High-Speed RAM)
μ PD780021A, 780031A	8 Kbytes	512 bytes
μ PD780022A, 780032A	16 Kbytes	
μ PD780023A, 780033A	24 Kbytes	1024 bytes
μ PD780024A, 780034A	32 Kbytes	
μ PD78F0034A	32 Kbytes Note	1024 bytes Note

Note The capacities of internal flash memory and internal high-speed RAM can be changed by means of the memory size switching register (IMS).

- External Memory Expansion Space: 64 Kbytes
- Minimum Instruction execution time changeable from high speed (0.24 μ s: @ 8.38-MHz operation with main system clock) to ultra-low speed (122 μ s: @ 32.768-kHz operation with subsystem clock)
- Instruction set suited to system control
 - Bit manipulation possible in all address spaces
 - Multiply and divide instructions
- Fifty-one I/O ports: (Four N-ch open-drain ports)
- 8-bit resolution A/D converter : 8 channels (μ PD780024A Subseries only)
- 10-bit resolution A/D converter : 8 channels (μ PD780034A Subseries only)
- Serial interface : 3 channels
 - 3-wire serial I/O mode : 2 channels
 - UART mode : 1 channel
- Timer: Five channels
 - 16-bit timer/event counter: 1 channel
 - 8-bit timer/event counter : 2 channels
 - Watch timer : 1 channel
 - Watchdog timer : 1 channel
- Vectored interrupts: 20
- Two types of on-chip clock oscillators (main system clock and subsystem clock)
- Power supply voltage: $V_{DD} = 1.8$ to 5.5 V

1.2 Applications

μ PD780021A, 780022A, 780023A, 780024A

μ PD780031A, 780032A, 780033A, 780034A, 78F0034A

Home electric appliances, pagers, AV equipment, car audios, car electric equipment, office automation equipment, etc.

μ PD780021A(A), 780022A(A), 780023A(A), 780024A(A)

μ PD780031A(A), 780032A(A), 780033A(A), 780034A(A)

Control of transportation equipment, gas detection breakers, safety devices, etc.

1.3 Ordering Information

(1) μ PD780024A Subseries

Part Number	Package	Internal ROM
μ PD780021ACW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780021AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780021AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780022ACW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780022AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780022AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780023ACW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780023AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780023AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780024ACW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780024AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780024AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780021ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780021AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780021AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780022ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780022AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780022AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780023ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780023AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780023AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780024ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780024AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780024AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM

Remark xxx indicates ROM code suffix.

(2) μ PD780034A Subseries

Part Number	Package	Internal ROM
μ PD780031ACW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780031AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780031AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780032ACW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780032AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780032AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780033ACW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780033AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780033AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780034ACW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780034AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780034AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780031ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780031AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780031AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780032ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780032AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780032AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780033ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780033AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780033AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780034ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780034AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780034AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD78F0034ACW	64-pin plastic shrink DIP (750 mil)	Flash memory
μ PD78F0034AGC-AB8	64-pin plastic QFP (14 × 14 mm)	Flash memory
μ PD78F0034AGK-8A8	64-pin plastic LQFP (12 × 12 mm)	Flash memory

Remark xxx indicates ROM code suffix.

1.4 Quality Grade

(1) μ PD780024A Subseries

Part Number	Package	Quality Grades
μ PD780021ACW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780021AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780021AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780022ACW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780022AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780022AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780023ACW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780023AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780023AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780024ACW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780024AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780024AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780021ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780021AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780021AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780022ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780022AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780022AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780023ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780023AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780023AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780024ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780024AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780024AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special

Remark xxx indicates ROM code suffix.

Please refer to "Quality Grades on NEC Semiconductor Devices" (Document No. C11531E) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

(2) μ PD780034A Subseries

Part Number	Package	Quality Grades
μ PD780031ACW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780031AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780031AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780032ACW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780032AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780032AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780033ACW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780033AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780033AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780034ACW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780034AGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780034AGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780031ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780031AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780031AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780032ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780032AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780032AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780033ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780033AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780033AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780034ACW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780034AGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780034AGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD78F0034ACW	64-pin plastic shrink DIP (750 mil)	Standard
μ PD78F0034AGC-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD78F0034AGK-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard


Remark xxx indicates ROM code suffix.

Please refer to "Quality Grades on NEC Semiconductor Devices" (Document No. C11531E) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

1.5 Pin Configuration (Top View)

- 64-pin plastic shrink DIP (750 mil)

μ PD780021ACW-xxx, 780022ACW-xxx, 780023ACW-xxx, 780024ACW-xxx
 μ PD780021ACW(A)-xxx, 780022ACW(A)-xxx, 780023ACW(A)-xxx, 780024ACW(A)-xxx
 μ PD780031ACW-xxx, 780032ACW-xxx, 780033ACW-xxx, 780034ACW-xxx
 μ PD780031ACW(A)-xxx, 780032ACW(A)-xxx, 780033ACW(A)-xxx, 780034ACW(A)-xxx
 μ PD78F0034ACW

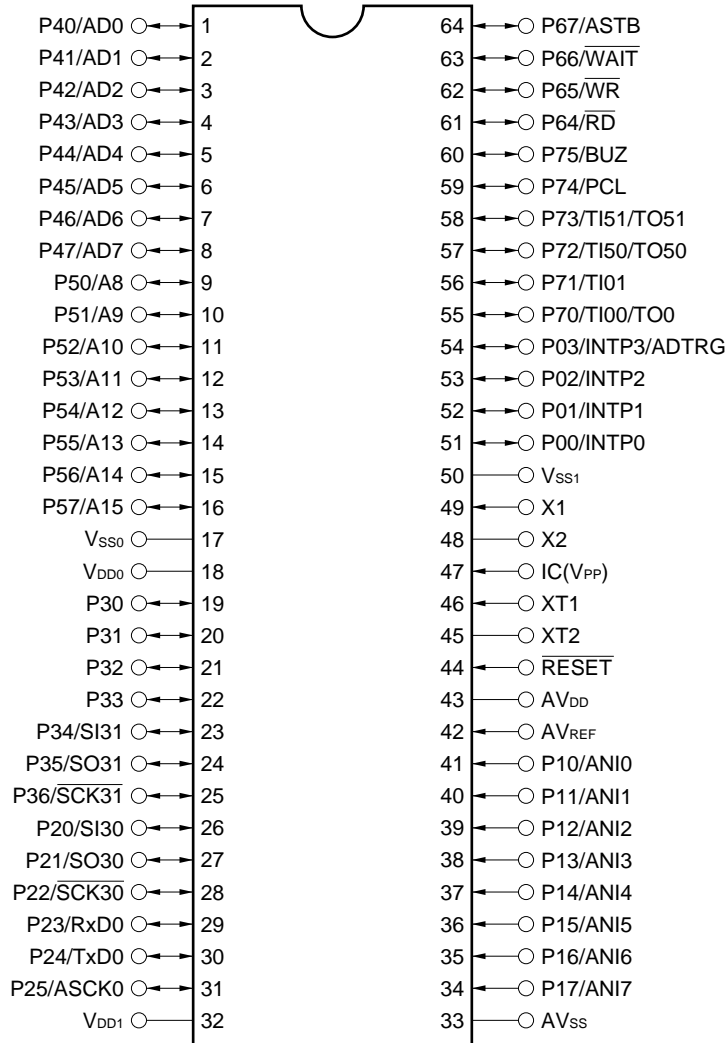

- Cautions**
1. Connect directly IC (Internally Connected) pin to VSS0 or VSS1.
 2. Connect AVSS pin to VSS0.


- Remarks**
1. When these devices are used in applications that require the reduction of noise generated from an on-chip microcontroller, the implementation of noise measures is recommended, such as supplying VDD0 and VDD1 independently, connecting VSS0 and VSS1 independently to ground lines, and so on.
 2. Pin connection in parentheses is intended for the μ PD78F0034A.

- **64-pin plastic QFP (14 × 14 mm)**

μ PD780021AGC-xxx-AB8, 780022AGC-xxx-AB8, 780023AGC-xxx-AB8, 780024AGC-xxx-AB8
 μ PD780021AGC(A)-xxx-AB8, 780022AGC(A)-xxx-AB8, 780023AGC(A)-xxx-AB8, 780024AGC(A)-xxx-AB8
 μ PD780031AGC-xxx-AB8, 780032AGC-xxx-AB8, 780033AGC-xxx-AB8, 780034AGC-xxx-AB8
 μ PD780031AGC(A)-xxx-AB8, 780032AGC(A)-xxx-AB8, 780033AGC(A)-xxx-AB8, 780034AGC(A)-xxx-AB8
 μ PD78F0034AGC-AB8

- **64-pin plastic LQFP (12 × 12 mm)**

μ PD780021AGK-xxx-8A8, 780022AGK-xxx-8A8, 780023AGK-xxx-8A8, 780024AGK-xxx-8A8
 μ PD780021AGK(A)-xxx-8A8, 780022AGK(A)-xxx-8A8, 780023AGK(A)-xxx-8A8, 780024AGK(A)-xxx-8A8
 μ PD780031AGK-xxx-8A8, 780032AGK-xxx-8A8, 780033AGK-xxx-8A8, 780034AGK-xxx-8A8
 μ PD780031AGK(A)-xxx-8A8, 780032AGK(A)-xxx-8A8, 780033AGK(A)-xxx-8A8, 780034AGK(A)-xxx-8A8
 μ PD78F0034AGK-8A8

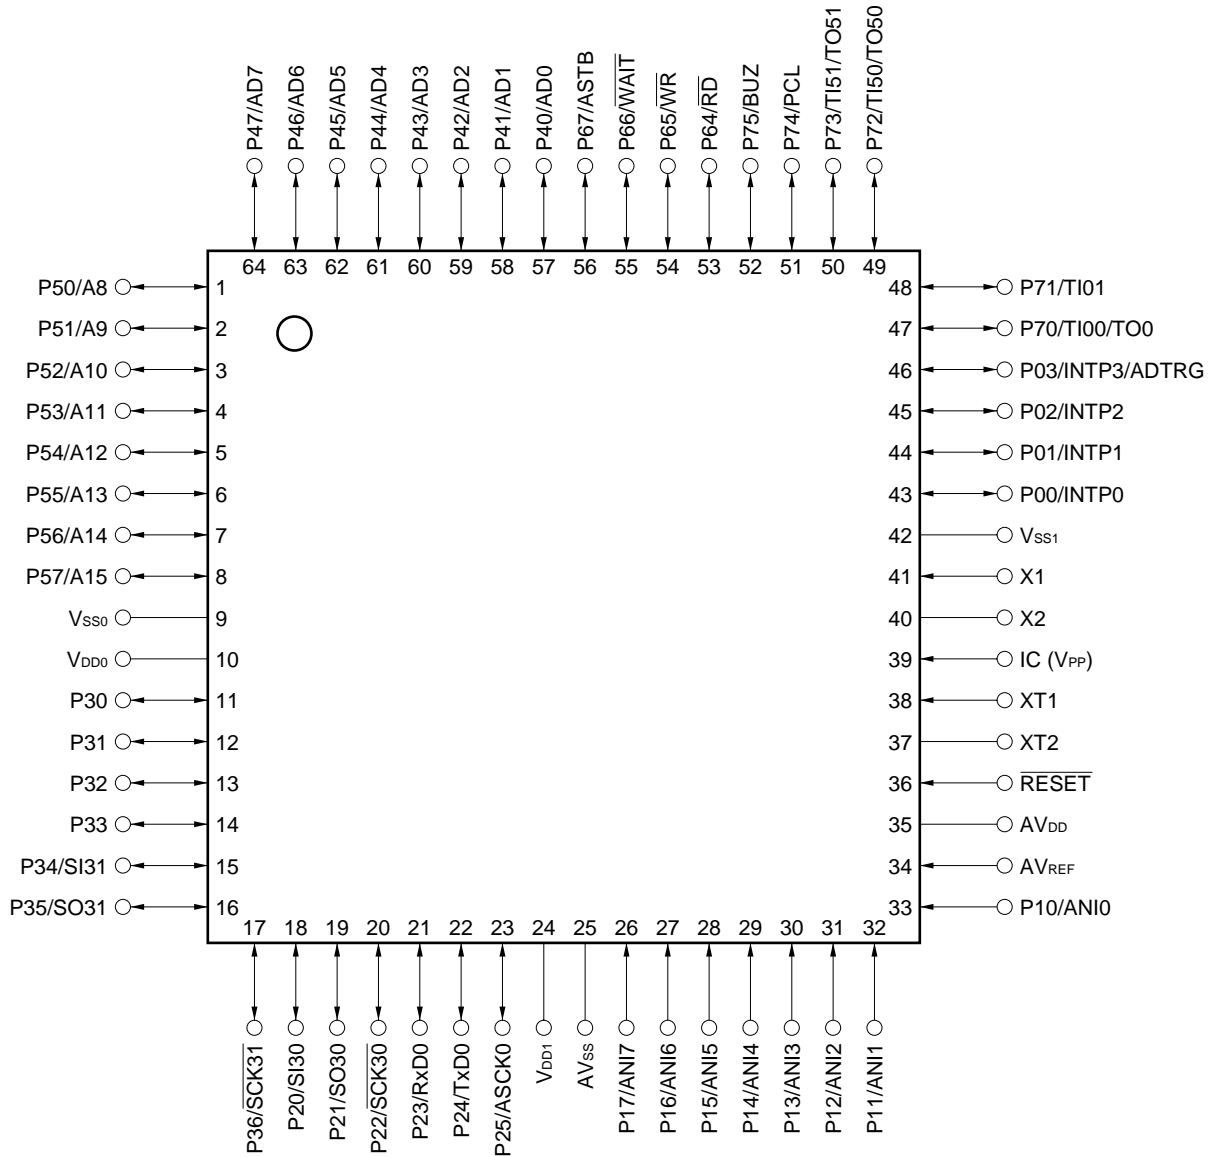



- Cautions**
1. Connect directly IC (Internally Connected) pin to V_{SS0} or V_{SS1} .
 2. Connect AV_{SS} pin to V_{SS0} .

- Remarks**
1. When these devices are used in applications that require the reduction of noise generated from an on-chip microcontroller, the implementation of noise measures is recommended, such as supplying V_{DD0} and V_{DD1} independently, connecting V_{SS0} and V_{SS1} independently to ground lines, and so on.
 2. Pin connection in parentheses is intended for the μ PD78F0034A.

A8 to A15	: Address Bus	P70 to P75	: Port7
AD0 to AD7	: Address/Data Bus	PCL	: Programmable Clock
ADTRG	: AD Trigger Input	$\overline{\text{RD}}$: Read Strobe
ANI0 to ANI7	: Analog Input	$\overline{\text{RESET}}$: Reset
ASCK0	: Asynchronous Serial Clock	RxD0	: Receive Data
ASTB	: Address Strobe	$\overline{\text{SCK30}}, \overline{\text{SCK31}}$: Serial Clock
AV _{DD}	: Analog Power Supply	SI30, SI31	: Serial Input
AV _{REF}	: Analog Reference Voltage	SO30, SO31	: Serial Output
AV _{SS}	: Analog Ground	TI00, TI01, TI50, TI51	: Timer Input
BUZ	: Buzzer Clock	TO0, TO50, TO51	: Timer Output
IC	: Internally Connected	TxD0	: Transmit Data
INTP0 to INTP3	: External Interrupt Input	V _{DD0} , V _{DD1}	: Power Supply
P00 to P03	: Port0	V _{PP}	: Programming Power Supply
P10 to P17	: Port1	V _{SS0} , V _{SS1}	: Ground
P20 to P25	: Port2	$\overline{\text{WAIT}}$: Wait
P30 to P36	: Port3	$\overline{\text{WR}}$: Write Strobe
P40 to P47	: Port4	X1, X2	: Crystal (Main System Clock)
P50 to P57	: Port5	XT1, XT2	: Crystal (Subsystem Clock)
P64 to P67	: Port6		

1.6 78K/0 Series Expansion

The following shows the products organized according to usage. The names in the parallelograms are subseries.

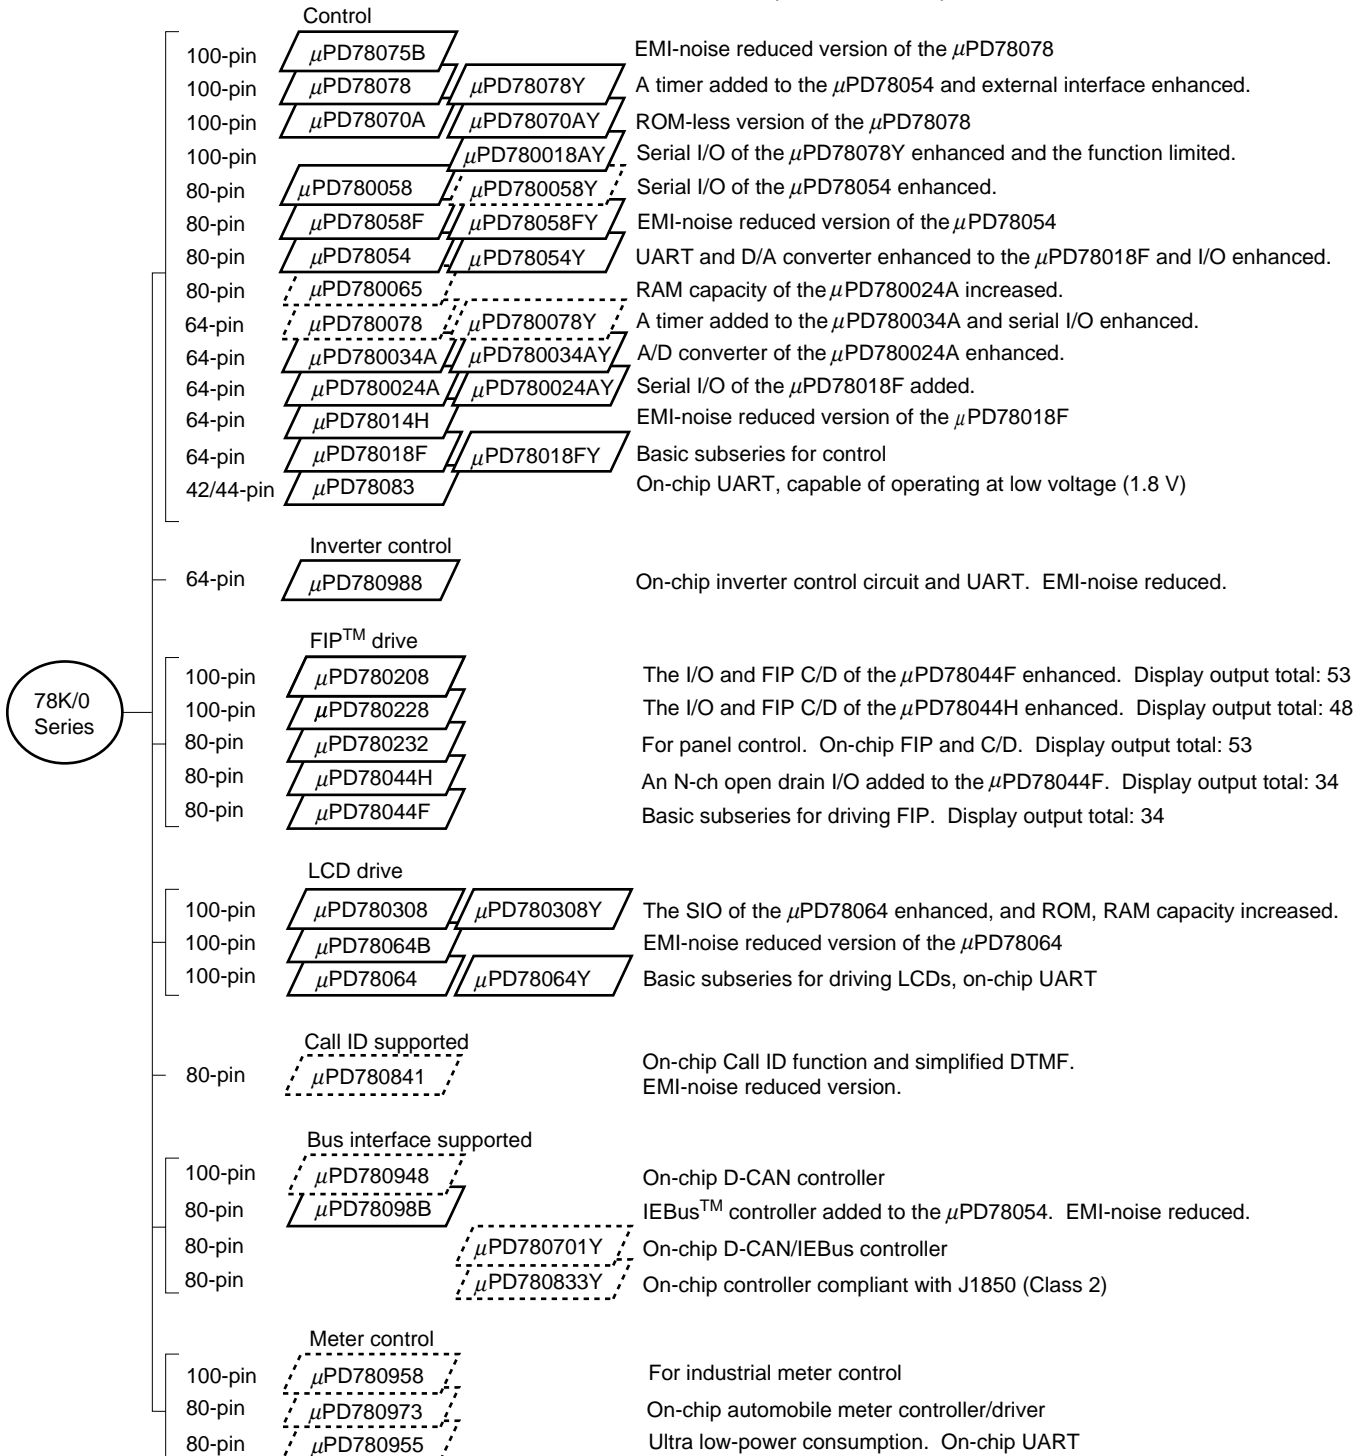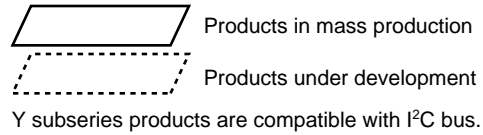


The major functional differences among the subseries are shown below.

Subseries Name	Function	ROM Capacity	Timer				8-bit	10-bit	8-bit	Serial Interface	I/O	V _{DD} MIN. Value	External Expansion			
			8-bit	16-bit	Watch	WDT	A/D	A/D	D/A							
Control	μPD78075B	32 K-40 K	4ch	1ch	1ch	1ch	8ch	-	2ch	3ch (UART: 1 ch)	88	1.8 V	Yes			
	μPD78078	48 K-60 K									61	2.7 V				
	μPD78070A	-														
	μPD780058	24 K-60 K	2ch	-	-	-	-	-	-	3ch (time-division UART: 1ch)	68	1.8 V				
	μPD78058F	48 K-60 K								3ch (UART: 1ch)	69	2.7 V				
	μPD78054	16 K-60 K								2.0 V						
	μPD780065	40 K-48 K								4ch (UART: 1ch)	60	2.7 V				
	μPD780078	48 K-60 K								2ch	-	8ch		3ch (UART: 2ch)	52	1.8 V
	μPD780034A	8 K-32 K								1ch	8ch	-		3ch (UART: 1ch, time-division 3-wire: 1ch)	51	
	μPD780024A															
	μPD78014H															
	μPD78018F	8 K-60 K														
μPD78083	8 K-16 K	-	-						1ch (UART: 1ch)	33		-				
Inverter control	μPD780988	32 K-60 K	3ch	Note	-	1ch	-	8ch	-	3ch (UART: 2ch)	47	4.0 V	Yes			
FIP drive	μPD780208	32 K-60 K	2ch	1ch	1ch	1ch	8ch	-	-	2ch	74	2.7 V	-			
	μPD780228	48 K-60 K								3ch	-	-		1ch	72	4.5 V
	μPD780232	16 K-24 K					4ch	2ch	40							
	μPD78044H	32 K-48 K	2ch	1ch	1ch	-	8ch	-	-	1ch	68	2.7 V				
	μPD78044F	16 K-40 K								2ch						
LCD drive	μPD780308	48 K-60 K	2ch	1ch	1ch	1ch	8ch	-	-	3ch (time-division UART: 1ch)	57	2.0 V	-			
	μPD78064B	32 K								2ch (UART: 1ch)						
	μPD78064	16 K-32 K														
Call ID supported	μPD780841	24 K-32 K	2ch	-	1ch	1ch	2ch	-	-	2ch (UART: 1ch)	61	2.7 V	-			
Bus interface supported	μPD780948	60 K	2ch	2ch	1ch	1ch	8ch	-	-	3ch (UART: 1ch)	79	4.0 V	Yes			
	μPD78098B	40 K-60 K		1ch							2ch	69	2.7 V	-		
	μPD780814	32 K-60 K		2ch	12ch	-	2ch (UART: 1ch)	46	4.0 V							
Meter control	μPD780958	48 K-60 K	4ch	2ch	-	1ch	-	-	-	2ch (UART: 1ch)	69	2.2 V	-			
	μPD780973	24 K-32 K	3ch	1ch	1ch		5ch	56	4.5 V							
	μPD780955	40 K	6ch		-	1ch				2ch (UART: 2ch)	50	2.2 V				

Note 16-bit timer: 2 channels
10-bit timer: 1 channel

1.7 Block Diagram

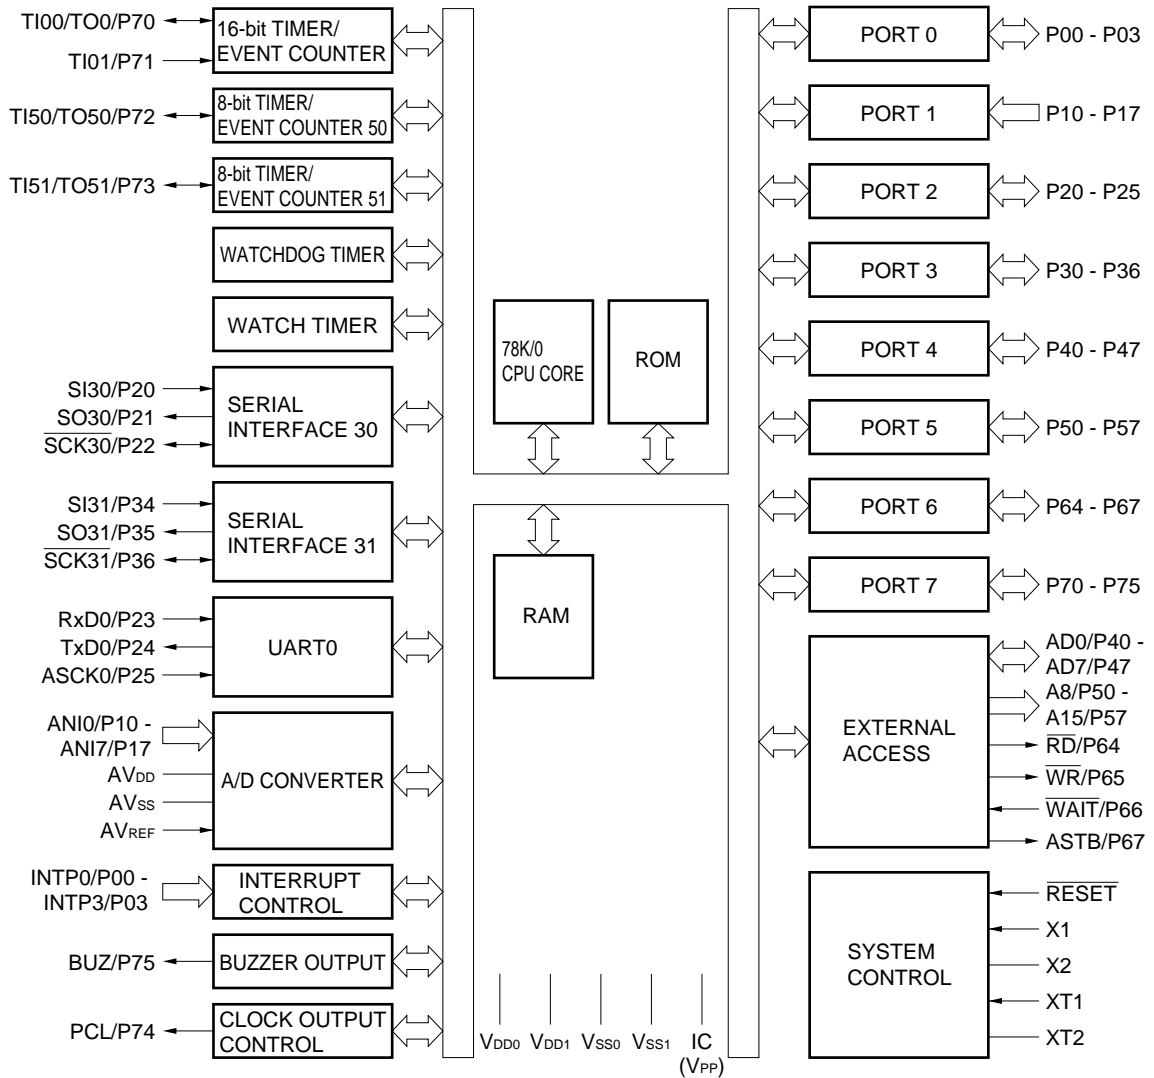

- Remarks 1.** The internal ROM and RAM capacities depend on the product.
2. Pin connection in parentheses is intended for the μ PD78F0034A.

1.8 Outline of Function

Item		Part Number				
		μPD780021A μPD780031A	μPD780022A μPD780032A	μPD780023A μPD780033A	μPD780024A μPD780034A	μPD78F0034A
Internal memory	ROM	8 Kbytes (Mask ROM)	16 Kbytes (Mask ROM)	24 Kbytes (Mask ROM)	32 Kbytes (Mask ROM)	32 Kbytes ^{Note} (Flash memory)
	High-speed RAM	512 bytes		1024 bytes		1024 bytes ^{Note}
Memory space		64 Kbytes				
General register		8 bits × 32 registers (8 bits × 8 registers × 4 banks)				
Minimum instruction execution time		Minimum instruction execution time changeable function				
	When main system clock selected	0.24 μs/0.48 μs/0.95 μs/1.91 μs/3.81 μs (@ 8.38-MHz operation)				
	When subsystem clock selected	122 μs (@ 32.768-kHz operation)				
Instruction set		<ul style="list-style-type: none"> • 16-bit operation • Multiply/divide (8 bits × 8 bits, 16 bits ÷ 8 bits) • Bit manipulate (set, reset, test, and Boolean operation) • BCD adjust, etc. 				
I/O port		Total : 51 <ul style="list-style-type: none"> • CMOS input : 8 • CMOS I/O : 39 • N-ch open-drain I/O 5-V breakdown : 4 				
A/D converter		<ul style="list-style-type: none"> • 8-bit resolution × 8 channels (μPD780021A, 780022A, 780023A, 780024A) • 10-bit resolution × 8 channels (μPD780031A, 780032A, 780033A, 780034A, 78F0034A) • Low-voltage operation: AV_{DD} = 1.8 to 5.5 V 				
Serial interface		<ul style="list-style-type: none"> • 3-wire serial I/O mode : 2 channels • UART mode : 1 channel 				
Timer		<ul style="list-style-type: none"> • 16-bit timer/event counter : 1 channel • 8-bit timer/event counter : 2 channels • Watch timer : 1 channel • Watchdog timer : 1 channel 				
Timer output		Three outputs: (8-bit PWM output enable: 2)				
Clock output		<ul style="list-style-type: none"> • 65.5 kHz, 131 kHz, 262 kHz, 524 kHz, 1.05 MHz, 2.10 MHz, 4.19 MHz, 8.38 MHz (8.38 MHz with main system clock) • 32.768 kHz (32.768 kHz with subsystem clock) 				
Buzzer output		1.02 kHz, 2.05 kHz, 4.10 kHz, 8.19 kHz (8.38 MHz with main system clock)				
Vectored interrupt	Maskable	Internal: 13, External: 5				
	Non-maskable	Internal: 1				
	Software	1				
Power supply voltage		V _{DD} = 1.8 to 5.5 V				
Operating ambient temperature		T _A = -40 to +85°C				
Package		<ul style="list-style-type: none"> • 64-pin plastic shrink DIP (750 mil) • 64-pin plastic QFP (14 × 14 mm) • 64-pin plastic LQFP (12 × 12 mm) 				

Note The capacities of internal flash memory and internal high-speed RAM can be changed by means of the memory size switching register (IMS).

1.9 Difference between Standard Grade and Special Grade

Standard Grade : μ PD780021A, 780022A, 780023A, 780024A
 μ PD780031A, 780032A, 780033A, 780034A, 78F0034A

Special Grade : μ PD780021A(A), 780022A(A), 780023A(A), 780024A(A)
 μ PD780031A(A), 780032A(A), 780033A(A), 780034A(A)

The standard and the special grade differ only in the quality level.

1.10 Mask Options

The mask ROM versions (μ PD780021A, 780022A, 780023A, 780024A, 780031A, 780032A, 780033A, and 780034A) provide pull-up resistor mask options which allow users to specify whether to connect a pull-up resistor to a specific port pin when the user places an order for device production. Using the mask option when pull-up resistors are required reduces the number of components to add to the device, resulting in board space saving.

The mask options provided in the μ PD780024A and 780034A Subseries are shown in Table 1-1.

Table 1-1. Mask Options of Mask ROM Versions

Pin Names	Mask Option
P30 to P33	Pull-up resistor connection can be specified in 1-bit units.

[MEMO]

CHAPTER 2 OUTLINE (μ PD780024AY, 780034AY SUBSERIES)

2.1 Features

- Internal Memory

Part Number \ Type	Program Memory (ROM)	Data Memory (High-Speed RAM)
μ PD780021AY, 780031AY	8 Kbytes	512 bytes
μ PD780022AY, 780032AY	16 Kbytes	
μ PD780023AY, 780033AY	24 Kbytes	1024 bytes
μ PD780024AY, 780034AY	32 Kbytes	
μ PD78F0034AY	32 Kbytes Note	1024 bytes Note

Note The capacities of internal flash memory and internal high-speed RAM can be changed by means of the memory size switching register.

- External Memory Expansion Space: 64 Kbytes
- Minimum instruction execution time changeable from high speed (0.24 μ s: @ 8.38-MHz operation with main system clock) to ultra-low speed (122 μ s: @ 32.768-kHz operation with subsystem clock)
- Instruction set suited to system control
 - Bit manipulation possible in all address spaces
 - Multiply and divide instructions
- Fifty-one I/O ports: (Four N-ch open-drain ports)
- 8-bit resolution A/D converter : 8 channels (μ PD780024AY Subseries only)
- 10-bit resolution A/D converter : 8 channels (μ PD780034AY Subseries only)
- Serial interface : 3 channels
 - I²C mode : 1 channel
 - 3-wire serial mode : 1 channel
 - UART mode : 1 channel
- Timer: Five channels
 - 16-bit timer/event counter : 1 channel
 - 8-bit timer/event counter : 2 channels
 - Watch timer : 1 channel
 - Watchdog timer : 1 channel
- Vectored interrupts: 20
- Two types of on-chip clock oscillators (main system clock and subsystem clock)
- Power supply voltage: $V_{DD} = 1.8$ to 5.5 V

2.2 Applications

μ PD780021AY, 780022AY, 780023AY, 780024AY

μ PD780031AY, 780032AY, 780033AY, 780034AY, 78F0034AY

AV equipment, pagers, car audios, car electric equipment, office automation equipment, household electric appliances, etc.

μ PD780021AY(A), 780022AY(A), 780023AY(A), 780024AY(A)

μ PD780031AY(A), 780032AY(A), 780033AY(A), 780034AY(A)

Controllers of vending machines, gas detection breakers, safety devices, etc.

2.3 Ordering Information

(1) μ PD780024AY Subseries

Part Number	Package	Internal ROM
μ PD780021AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780021AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780021AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780022AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780022AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780022AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780023AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780023AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780023AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780024AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780024AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780024AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780021AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780021AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780021AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780022AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780022AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780022AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780023AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780023AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780023AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780024AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780024AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780024AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM

Remark xxx indicates ROM code suffix.

(2) μ PD780034AY Subseries

Part Number	Package	Internal ROM
μ PD780031AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780031AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780031AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780032AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780032AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780032AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780033AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780033AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780033AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780034AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780034AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780034AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780031AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780031AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780031AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780032AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780032AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780032AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780033AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780033AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780033AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD780034AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Mask ROM
μ PD780034AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Mask ROM
μ PD780034AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Mask ROM
μ PD78F0034AYCW	64-pin plastic shrink DIP (750 mil)	Flash memory
μ PD78F0034AYGC-AB8	64-pin plastic QFP (14 × 14 mm)	Flash memory
μ PD78F0034AYGK-8A8	64-pin plastic LQFP (12 × 12 mm)	Flash memory

Remark xxx indicates ROM code suffix.

2.4 Quality Grade

(1) μ PD780024AY Subseries

Part Number	Package	Quality Grades
μ PD780021AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780021AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780021AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780022AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780022AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780022AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780023AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780023AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780023AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780024AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780024AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780024AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780021AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780021AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780021AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780022AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780022AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780022AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780023AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780023AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780023AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780024AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780024AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780024AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special

Remark xxx indicates ROM code suffix.

Please refer to "Quality Grades on NEC Semiconductor Devices" (Document No. C11531E) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

(2) μ PD780034AY Subseries

Part Number	Package	Quality Grades
μ PD780031AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780031AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780031AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780032AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780032AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780032AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780033AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780033AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780033AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780034AYCW-xxx	64-pin plastic shrink DIP (750 mil)	Standard
μ PD780034AYGC-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD780034AYGK-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard
μ PD780031AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780031AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780031AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780032AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780032AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780032AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780033AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780033AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780033AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD780034AYCW(A)-xxx	64-pin plastic shrink DIP (750 mil)	Special
μ PD780034AYGC(A)-xxx-AB8	64-pin plastic QFP (14 × 14 mm)	Special
μ PD780034AYGK(A)-xxx-8A8	64-pin plastic LQFP (12 × 12 mm)	Special
μ PD78F0034AYCW	64-pin plastic shrink DIP (750 mil)	Standard
μ PD78F0034AYGC-AB8	64-pin plastic QFP (14 × 14 mm)	Standard
μ PD78F0034AYGK-8A8	64-pin plastic LQFP (12 × 12 mm)	Standard


Remark xxx indicates ROM code suffix.

Please refer to "Quality Grades on NEC Semiconductor Devices" (Document No. C11531E) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

2.5 Pin Configuration (Top View)

- 64-pin plastic shrink DIP (750 mil)

μ PD780021AYCW-xxx, 780022AYCW-xxx, 780023AYCW-xxx, 780024AYCW-xxx
 μ PD780021AYCW(A)-xxx, 780022AYCW(A)-xxx, 780023AYCW(A)-xxx, 780024AYCW(A)-xxx
 μ PD780031AYCW-xxx, 780032AYCW-xxx, 780033AYCW-xxx, 780034AYCW-xxx
 μ PD780031AYCW(A)-xxx, 780032AYCW(A)-xxx, 780033AYCW(A)-xxx, 780034AYCW(A)-xxx
 μ PD78F0034AYCW

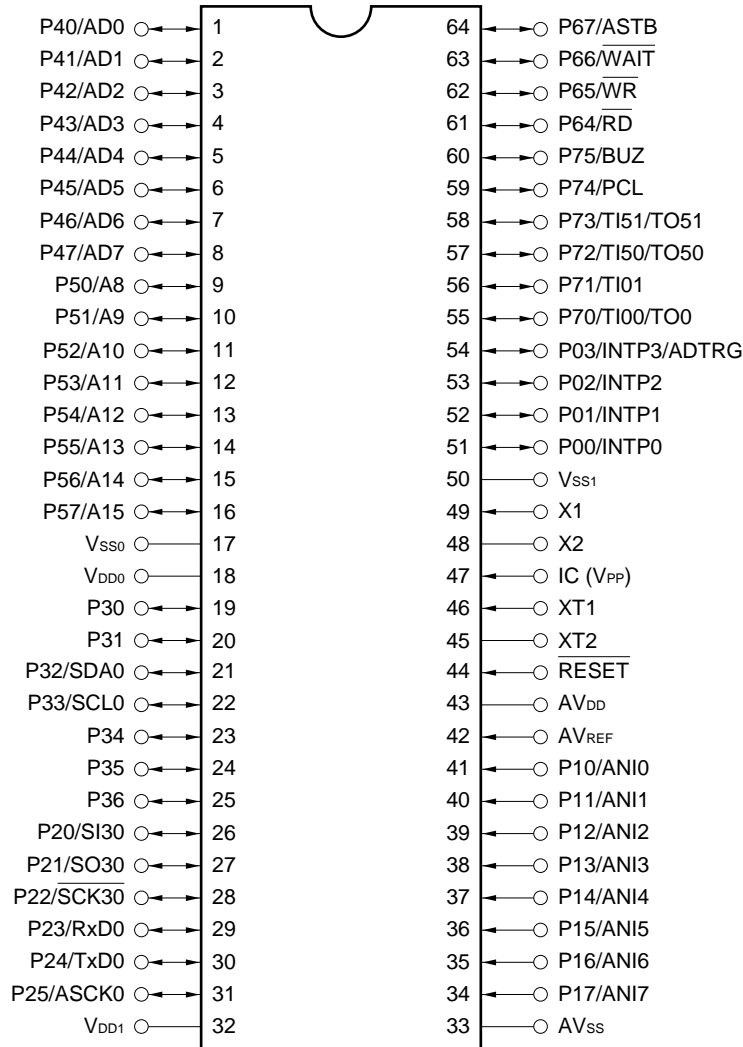

- Cautions**
1. Connect IC directly (Internally Connected) pin to VSS0 or VSS1.
 2. Connect AVSS pin to VSS0.


- Remarks**
1. When these devices are used in applications that require the reduction of noise generated from an on-chip microcontroller, the implementation of noise measures is recommended, such as supplying VDD0 and VDD1 independently, connecting VSS0 and VSS1 independently to ground lines, and so on.
 2. Pin connection in parentheses is intended for the μ PD78F0034AY.

- **64-pin plastic QFP (14 × 14 mm)**

μ PD780021AYGC-xxx-AB8, 780022AYGC-xxx-AB8, 780023AYGC-xxx-AB8, 780024AYGC-xxx-AB8
 μ PD780021AYGC(A)-xxx-AB8, 780022AYGC(A)-xxx-AB8, 780023AYGC(A)-xxx-AB8, 780024AYGC(A)-xxx-AB8
 μ PD780031AYGC-xxx-AB8, 780032AYGC-xxx-AB8, 780033AYGC-xxx-AB8, 780034AYGC-xxx-AB8
 μ PD780031AYGC(A)-xxx-AB8, 780032AYGC(A)-xxx-AB8, 780033AYGC(A)-xxx-AB8, 780034AYGC(A)-xxx-AB8
 μ PD78F0034AYGC-AB8

- **64-pin plastic LQFP (12 × 12 mm)**

μ PD780021AYGK-xxx-8A8, 780022AYGK-xxx-8A8, 780023AYGK-xxx-8A8, 780024AYGK-xxx-8A8
 μ PD780021AYGK(A)-xxx-8A8, 780022AYGK(A)-xxx-8A8, 780023AYGK(A)-xxx-8A8, 780024AYGK(A)-xxx-8A8
 μ PD780031AYGK-xxx-8A8, 780032AYGK-xxx-8A8, 780033AYGK-xxx-8A8, 780034AYGK-xxx-8A8
 μ PD780031AYGK(A)-xxx-8A8, 780032AYGK(A)-xxx-8A8, 780033AYGK(A)-xxx-8A8, 780034AYGK(A)-xxx-8A8
 μ PD78F0034AYGK-8A8

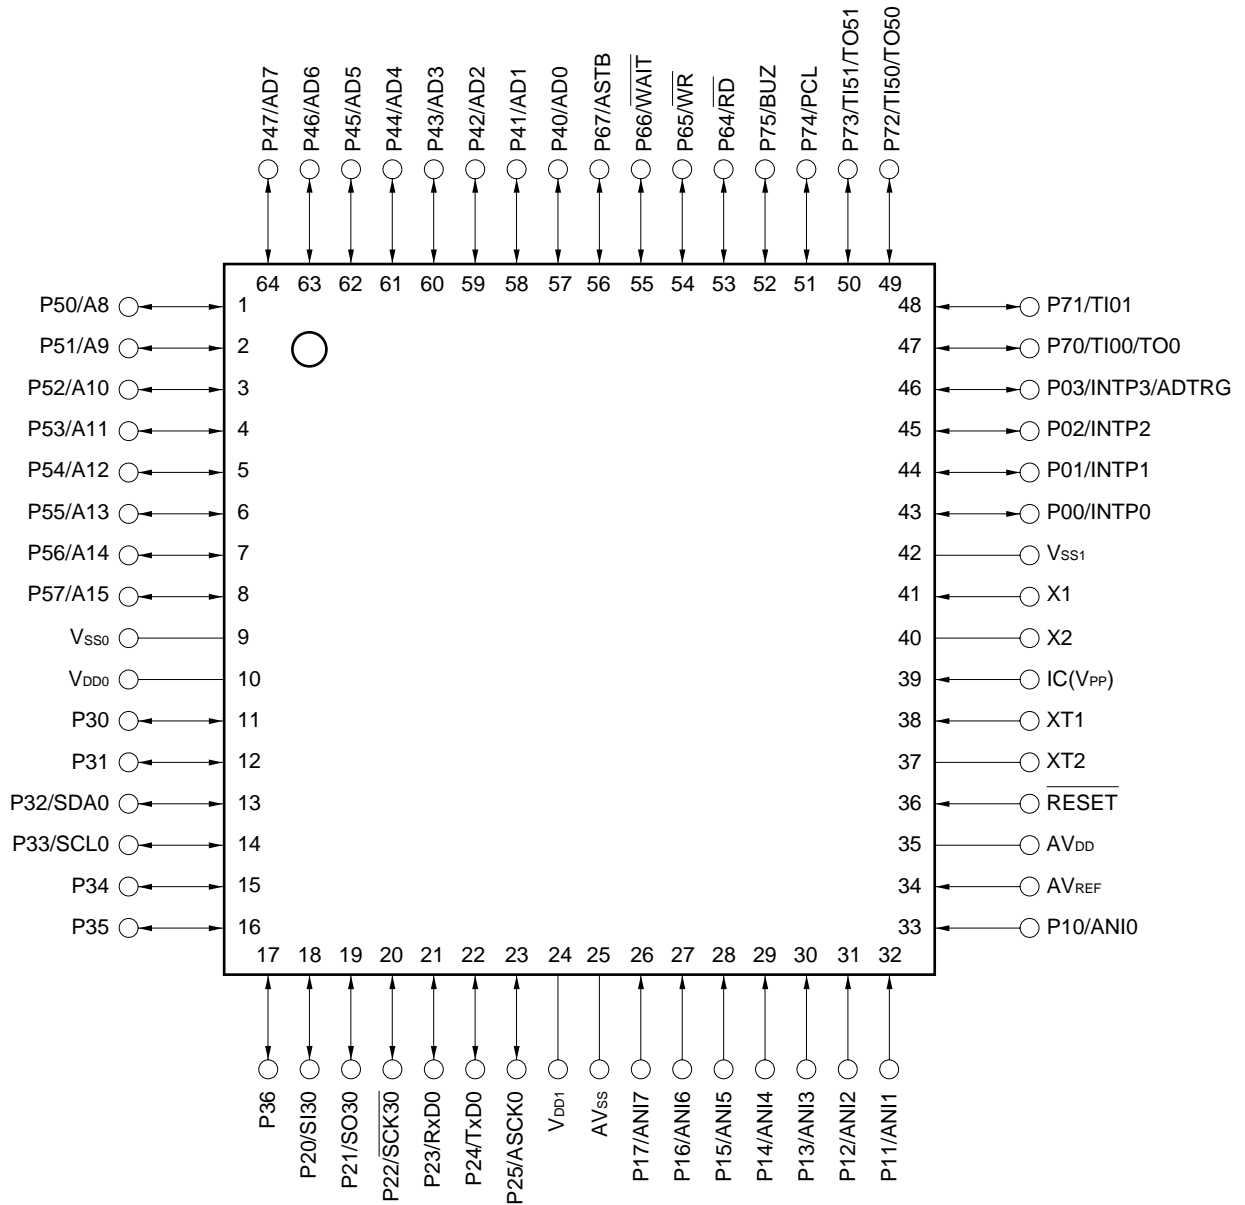



- Cautions**
1. Connect IC directly (Internally Connected) pin to V_{SS0} or V_{SS1}.
 2. Connect AV_{SS} pin to V_{SS0}.

- Remarks**
1. When these devices are used in applications that require the reduction of noise generated from an on-chip microcontroller, the implementation of noise measures is recommended, such as supplying V_{DD0} and V_{DD1} independently, connecting V_{SS0} and V_{SS1} independently to ground lines, and so on.
 2. Pin connection in parentheses is intended for the μ PD78F0034AY.

A8 to A15	: Address Bus	PCL	: Programmable Clock
AD0 to AD7	: Address/Data Bus	\overline{RD}	: Read Strobe
ADTRG	: AD Trigger Input	\overline{RESET}	: Reset
ANI0 to ANI7	: Analog Input	RxD0	: Receive Data
ASCK0	: Asynchronous Serial Clock	$\overline{SCK30}$: Serial Clock
ASTB	: Address Strobe	SCL0	: Serial Clock
AV _{DD}	: Analog Power Supply	SDA0	: Serial Data
AV _{REF}	: Analog Reference Voltage	SI30	: Serial Input
AV _{SS}	: Analog Ground	SO30	: Serial Output
BUZ	: Buzzer Clock	TI00, TI01, TI50, TI51	: Timer Input
IC	: Internally Connected	TO0, TO50, TO51	: Timer Output
INTP0 to INTP3	: External Interrupt Input	TxD0	: Transmit Data
P00 to P03	: Port 0	V _{DD0} , V _{DD1}	: Power Supply
P10 to P17	: Port 1	V _{PP}	: Programming Power Supply
P20 to P25	: Port 2	V _{SS0} , V _{SS1}	: Ground
P30 to P36	: Port 3	\overline{WAIT}	: Wait
P40 to P47	: Port 4	\overline{WR}	: Write Strobe
P50 to P57	: Port 5	X1, X2	: Crystal (Main System Clock)
P64 to P67	: Port 6	XT1, XT2	: Crystal (Subsystem Clock)
P70 to P75	: Port 7		

2.6 78K/0 Series Expansion

The following shows the products organized according to usage. The names in the parallelograms are subseries.

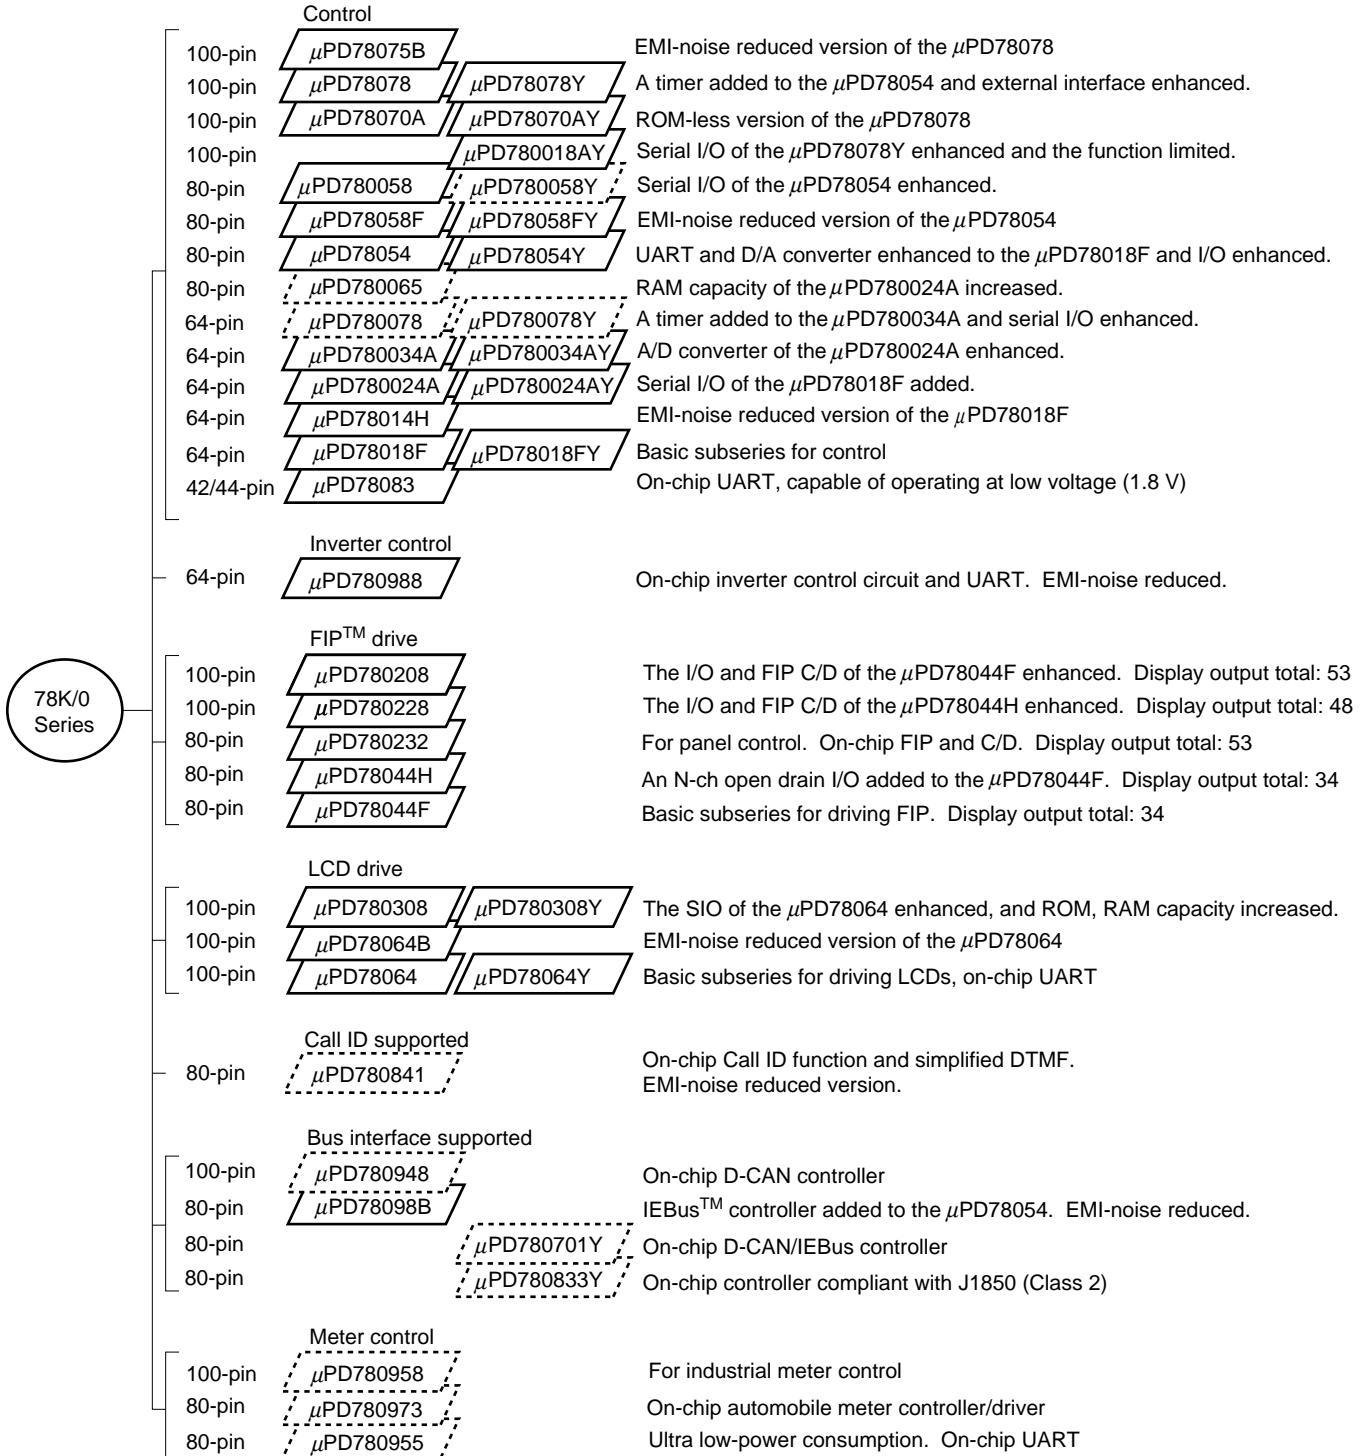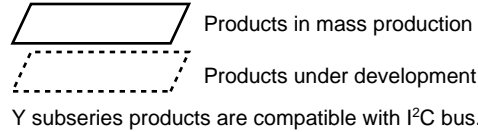


The major differences among Y subseries are indicated below.

Subseries	Function	ROM Capacity	Serial Interface Configuration	I/O	V _{DD} MIN. Value
Control	μ PD78078Y	48 K to 60 K	3-wire/2-wire/I ² C : 1 ch 3-wire with auto-transmit/receive : 1 ch	88	1.8 V
	μ PD78070AY	—	3-wire/UART : 1 ch	61	2.7 V
	μ PD780018AY	48 K to 60 K	3-wire with auto-transmit/receive : 1 ch Time-division 3-wire : 1 ch I ² C bus (multimaster supported) : 1 ch	88	
	μ PD780058Y	24 K to 60 K	3-wire/2-wire/I ² C : 1 ch 3-wire with auto-transmit/receive : 1 ch 3-wire/time-division UART : 1 ch	68	1.8 V
	μ PD78058FY	48 K to 60 K	3-wire/2-wire/I ² C : 1 ch 3-wire with auto-transmit/receive : 1 ch	69	2.7 V
	μ PD78054Y	16 K to 60 K	3-wire/UART : 1 ch		2.0 V
	μ PD780034AY	8 K to 32 K	UART : 1 ch 3-wire : 1 ch I ² C bus (multimaster supported) : 1 ch	51	1.8 V
	μ PD780024AY				
	μ PD78018FY	8 K to 60 K	3-wire/2-wire/I ² C : 1 ch 3-wire with auto-transmit/receive : 1 ch	53	
LCD drive	μ PD780308Y	48 K to 60 K	3-wire/2-wire/I ² C : 1 ch 3-wire/time-division UART : 1 ch 3-wire : 1 ch	57	2.0 V
	μ PD78064Y	16 K to 32 K	3-wire/2-wire/I ² C : 1 ch 3-wire/UART : 1 ch		

Remark Functions other than serial interface are the same as subseries without Y.

2.7 Block Diagram

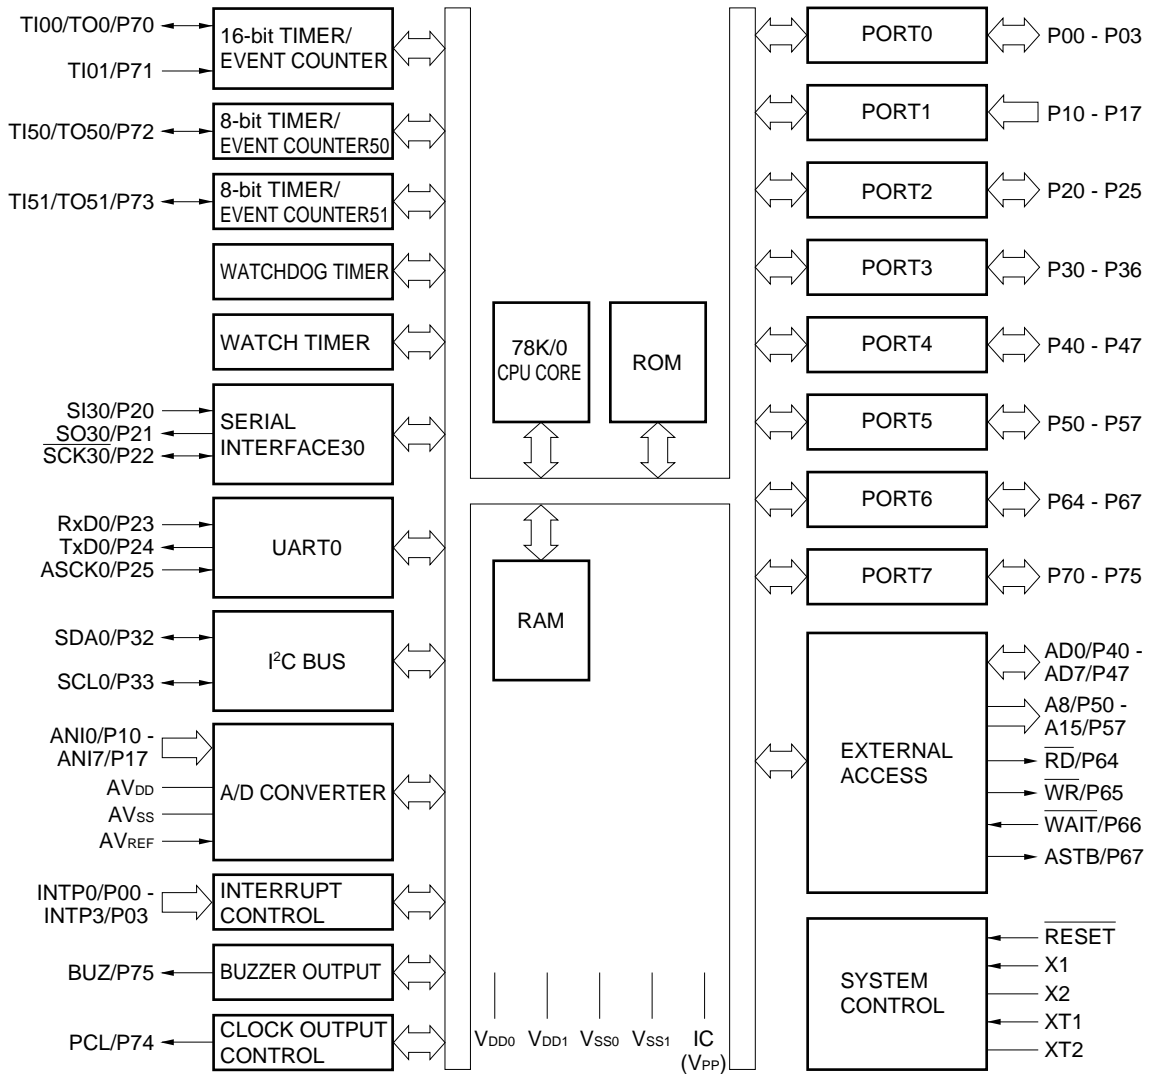

- Remarks 1.** The internal ROM and RAM capacities depend on the product.
2. Pin connection in parentheses is intended for the μ PD78F0034AY.

2.8 Outline of Function

Item		Part Number				
		μ PD780021AY μ PD780031AY	μ PD780022AY μ PD780032AY	μ PD780023AY μ PD780033AY	μ PD780024AY μ PD780034AY	μ PD78F0034AY
Internal memory	ROM	8 Kbytes (Mask ROM)	16 Kbytes (Mask ROM)	24 Kbytes (Mask ROM)	32 Kbytes (Mask ROM)	32 Kbytes ^{Note} (Flash memory)
	High-speed RAM	512 bytes		1024 bytes		1024 bytes ^{Note}
Memory space		64 Kbytes				
General register		8 bits \times 32 registers (8 bits \times 8 registers \times 4 banks)				
Minimum instruction execution time		Minimum instruction execution time changeable function				
		When main system clock selected				
		0.24 μ s/0.48 μ s/0.95 μ s/1.91 μ s/3.81 μ s (@ 8.38-MHz operation)				
		When subsystem clock selected				
		122 μ s (@ 32.768-kHz operation)				
Instruction set		<ul style="list-style-type: none"> • 16-bit operation • Multiply/divide (8 bits \times 8 bits, 16 bits + 8 bits) • Bit manipulate (set, reset, test, and Boolean operation) • BCD adjust, etc. 				
I/O port		Total : 51 <ul style="list-style-type: none"> • CMOS input : 8 • CMOS I/O : 39 • N-ch open-drain I/O 5-V breakdown : 4 				
A/D converter		<ul style="list-style-type: none"> • 8-bit resolution \times 8 channels (μPD780021AY, 780022AY, 780023AY, 780024AY) • 10-bit resolution \times 8 channels (μPD780031AY, 780032AY, 780033AY, 780034AY, 78F0034AY) • Low-voltage operation: $A_{VDD} = 1.8$ to 5.5 V 				
Serial interface		<ul style="list-style-type: none"> • 3-wire serial I/O mode : 1 channel • UART mode : 1 channel • I²C bus mode : 1 channel 				
Timer		<ul style="list-style-type: none"> • 16-bit timer/event counter : 1 channel • 8-bit timer/event counter : 2 channels • Watch timer : 1 channel • Watchdog timer : 1 channel 				
Timer output		Three outputs: (8-bit PWM output enable: 2)				
Clock output		<ul style="list-style-type: none"> • 65.5 kHz, 131 kHz, 262 kHz, 524 kHz, 1.05 MHz, 2.10 MHz, 4.19 MHz, 8.38 MHz (8.38 MHz with main system clock) • 32.768 kHz (32.768 kHz with subsystem clock) 				
Buzzer output		1.02 kHz, 2.05 kHz, 4.10 kHz, 8.19 kHz (8.38 MHz with main system clock)				
Vectored interrupt	Maskable interrupt	Internal: 13, External: 5				
	Non-maskable interrupt	Internal: 1				
	Software interrupt	1				
Power supply voltage		$V_{DD} = 1.8$ to 5.5 V				
Operating ambient temperature		$T_A = -40$ to $+85^\circ\text{C}$				
Package		<ul style="list-style-type: none"> • 64-pin plastic shrink DIP (750 mil) • 64-pin plastic QFP (14 \times 14 mm) • 64-pin plastic LQFP (12 \times 12 mm) 				

Note The capacities of internal flash memory and internal high-speed RAM can be changed by means of the memory size switching register (IMS).

2.9 Difference between Standard Grade and Special Grade

Standard Grade : μ PD780021AY, 780022AY, 780023AY, 780024AY
 μ PD780031AY, 780032AY, 780033AY, 780034AY, 78F0034AY

Special Grade : μ PD780021AY(A), 780022AY(A), 780023AY(A), 780024AY(A)
 μ PD780031AY(A), 780032AY(A), 780033AY(A), 780034AY(A)

The standard and the special grade differ only in the quality level.

2.10 Mask Options

The mask ROM versions (μ PD780021AY, 780022AY, 780023AY, 780024AY, 780031AY, 780032AY, 780033AY, 780034AY) provide pull-up resistor mask options which allow users to specify whether to connect a pull-up resistor to a specific port pin when the user places an order for device production. Using this mask option when pull-up resistors are required reduces the number of components to add to the device, resulting in board space saving.

The mask options provided in the μ PD780024AY, 780034AY Subseries are shown in Table 2-1.

Table 2-1. Mask Options of Mask ROM Versions

Pin Names	Mask Option
P30, P31	Pull-up resistor connection can be specified in 1-bit units.

[MEMO]

CHAPTER 3 PIN FUNCTION (μ PD780024A, 780034A SUBSERIES)

3.1 Pin Function List

(1) Port Pins (1/2)

Pin Name	Input/Output	Function		After Reset	Alternate Function
P00	Input/Output	Port 0 4-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		Input	INTP0
P01					INTP1
P02					INTP2
P03					INTP3/ADTRG
P10 to P17	Input	Port 1 8-bit input only port.		Input	ANI0 to ANI7
P20	Input/Output	Port 2 6-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		Input	SI30
P21					SO30
P22					SCK30
P23					RxD0
P24					TxD0
P25					ASCK0
P30	Input/Output	Port 3 7-bit input/output port Input/output mode can be specified bit-wise. N-ch open-drain input/output port On-chip pull-up resistor can be specified by mask option. (Mask ROM version only) LEDs can be driven directly. An on-chip pull-up resistor can be used by software.		Input	—
P31					
P32					
P33					
P34					SI31
P35					SO31
P36					SCK31
P40 to P47	Input/Output	Port 4 8-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software. Interrupt request flag (KRIF) is set to 1 by falling edge detection.		Input	AD0 to AD7
P50 to P57	Input/Output	Port 5 8-bit input/output port LEDs can be driven directly. Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		Input	A8 to A15
P64	Input/Output	Port 6 4-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		Input	$\overline{\text{RD}}$
P65					$\overline{\text{WR}}$
P66					$\overline{\text{WAIT}}$
P67					ASTB

(1) Port Pins (2/2)

Pin Name	Input/Output	Function	After Reset	Alternate Function
P70	Input/Output	Port 7 6-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.	Input	TI00/TO0
P71				TI01
P72				TI50/TO50
P73				TI51/TO51
P74				PCL
P75				BUZ

(2) Non-port Pins (1/2)

Pin Name	Input/Output	Function	After Reset	Alternate Function
INTP0	Input	External interrupt request input with specifiable valid edges (rising edge, falling edge, both rising and falling edges)	Input	P00
INTP1				P01
INTP2				P02
INTP3				P03/ADTRG
SI30	Input	Serial interface serial data input	Input	P20
SI31				P34
SO30	Output	Serial interface serial data output	Input	P21
SO31				P35
$\overline{\text{SCK30}}$	Input/Output	Serial interface serial clock input/output	Input	P22
$\overline{\text{SCK31}}$				P36
RxD0	Input	Asynchronous serial interface serial data input	Input	P23
TxD0	Output	Asynchronous serial interface serial data output	Input	P24
ASCK0	Input	Asynchronous serial interface serial clock input	Input	P25
TI00	Input	External count clock input to 16-bit timer (TM0) Capture trigger input to TM0 capture register (CR00, CR01)	Input	P70/TO0
TI01		Capture trigger input to TM0 capture register (CR00)		P71
TI50		External count clock input to 8-bit timer (TM50)		P72/TO50
TI51		External count clock input to 8-bit timer (TM51)		P73/TO51
TO0	Output	16-bit timer TM0 output	Input	P70/TO0
TO50		8-bit timer (TM50) output (also used for 8-bit PWM output)		P72/TO50
TO51		8-bit timer (TM51) output (also used for 8-bit PWM output)		P73/TO51
PCL	Output	Clock output (for main system clock and subsystem clock trimming)	Input	P74
BUZ	Output	Buzzer output	Input	P75
AD0 to AD7	Input/Output	Lower-order address/data bus when expanding external memory	Input	P40 to P47
A8 to A15	Output	High-order address bus when expanding external memory	Input	P50 to P57
$\overline{\text{RD}}$	Output	Strobe signal output for read operation from external memory	Input	P64
$\overline{\text{WR}}$		Strobe signal output for write operation from external memory		P65

(2) Non-port Pins (2/2)

Pin Name	Input/Output	Function	After Reset	Alternate Function
$\overline{\text{WAIT}}$	Input	Wait insertion when accessing external memory	Input	P66
ASTB	Output	Strobe output externally latching address information output to ports 4, 5 to access external memory	Input	P67
ANI0 to ANI7	Input	A/D converter analog input	Input	P10 to P17
ADTRG	Input	A/D converter trigger signal input	Input	P03/INTP3
AV _{REF}	Input	A/D converter reference voltage input	—	—
AV _{DD}	—	A/D converter analog power supply. Connect to V _{DD0} or V _{DD1}	—	—
AV _{SS}	—	A/D converter ground potential. Connect to V _{SS0} or V _{SS1}	—	—
$\overline{\text{RESET}}$	Input	System reset input	—	—
X1	Input	Crystal connection for main system clock oscillation	—	—
X2	—		—	—
XT1	Input	Crystal connection for subsystem clock oscillation	—	—
XT2	—		—	—
V _{DD0}	—	Positive power supply	—	—
V _{SS0}	—	Ground potential	—	—
V _{DD1}	—	Positive power supply other than port	—	—
V _{SS1}	—	Ground potential other than port	—	—
IC	—	Internally connected. Connect directly to V _{SS0} or V _{SS1}	—	—
V _{PP}	—	High-voltage application for program write/verify Connect directly to V _{SS0} or V _{SS1} in normal operating mode.	—	—

3.2 Description of Pin Functions

3.2.1 P00 to P03 (Port 0)

These are 4-bit input/output ports. Besides serving as input/output ports, they function as an external interrupt input, and A/D converter external trigger input.

The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 4-bits input/output ports.

P00 to P03 can be specified for input or output ports bit-wise with a port mode register 0 (PM0). On-chip pull-up resistors can be used for them by defining the pull-up resistor option register 0 (PU0).

(2) Control mode

In this mode, these ports function as an external interrupt request input, and A/D converter external trigger input.

(a) INTP0 to INTP3

INTP0 to INTP3 are external interrupt request input pins which can specify valid edges (rising edge, falling edge, and both rising and falling edges).

(b) ADTRG

A/D converter external trigger input.

Caution When P03 is used as an A/D converter external trigger input, specify the valid edge by bits 1, 2 (EGA00, EGA01) of A/D converter mode register (ADM0) and set interrupt mask flag (PMK3) to 1.

3.2.2 P10 to P17 (Port 1)

These are 8-bit input only ports. Besides serving as input ports, they function as an A/D converter analog input. The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 8-bit input only ports.

(2) Control mode

These ports function as A/D converter analog input pins (ANI0 to ANI7).

3.2.3 P20 to P25 (Port 2)

These are 6-bit input/output ports. Besides serving as input/output ports, they function as data input/output to/from the serial interface and clock input/output.

The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 6-bit input/output ports. They can be specified bit-wise as input or output ports with port mode register 2 (PM2). On-chip pull-up resistors can be used for them by setting pull-up resistor option register 2 (PU2).

(2) Control mode

These ports function as serial interface data input/output and clock input/output functions.

(a) SI30 and SO30

Serial interface serial data input/output pins.

(b) $\overline{\text{SCK30}}$

Serial interface serial clock input/output pin.

(c) RxD0, TxD0

Asynchronous serial interface serial data input/output pins.

(d) ASCK0

Asynchronous serial interface serial clock input pin.

3.2.4 P30 to P36 (Port 3)

These are 7-bit input/output ports. Beside serving as input/output ports, they function as serial interface data input/output and clock input/output.

P30 to P33 can drive LEDs directly.

The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 7-bit input/output ports. They can be specified bit-wise as input or output ports with port mode register 3 (PM3). P30 to P33 are N-ch open drain input/output port. On-chip pull-up resistor can be used by mask option. (Mask ROM version only) On-chip pull-up resistors of P34 to P36 can be used by defining the pull-up resistor option register 3 (PU3).

(2) Control mode

These ports function as serial interface data input/output and clock input/output.

(a) SI31 and SO31

Serial interface serial data input/output pins.

(b) $\overline{\text{SCK31}}$

Serial interface serial clock input/output pin.

3.2.5 P40 to P47 (Port 4)

These are 8-bit input/output ports. Besides serving as input/output ports, they function as an address/data bus. The interrupt request flag (KRIF) can be set to 1 by detecting a falling edge. The following operating mode can be specified bit-wise.

Caution When using the falling edge detection interrupt (INTKR), be sure to set the memory expansion mode register (MEM) to 01H.

(1) Port mode

These ports function as 8-bit input/output ports. They can be specified in 1-bit units for input or output ports by using port mode register 4 (PM4). On-chip pull-up resistors can be used by setting pull-up resistor option register 4 (PU4).

(2) Control mode

These ports function as low-order address/data bus pins (AD0 to AD7) in external memory expansion mode.

3.2.6 P50 to P57 (Port 5)

These are 8-bit input/output ports. Besides serving as input/output ports, they function as an address bus. Port 5 can drive LEDs directly. The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 8-bit input/output ports. They can be specified bit-wise as input/output ports with port mode register 5 (PM5). On-chip pull-up resistors can be used by setting pull-up resistor option register 5 (PU5).

(2) Control mode

These ports function as high-order address bus pins (A8 to A15) in external memory expansion mode.

3.2.7 P64 to P67 (Port 6)

These are 4-bit input/output ports. Besides serving as input/output ports, they are used for control in external memory expansion mode.

The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 4-bit input/output ports. They can be specified bit-wise as input or output ports with port mode register 6 (PM6).

On-chip pull-up resistors can be used by setting pull-up resistor option register 6 (PU6).

(2) Control mode

These ports function as control signal output pins ($\overline{\text{RD}}$, $\overline{\text{WR}}$, $\overline{\text{WAIT}}$, ASTB) in external memory expansion mode.

Caution When external wait is not used in external memory expansion mode, P66 can be used as an input/output port.

3.2.8 P70 to P75 (Port 7)

These are 6-bit input/output ports. Besides serving as input/output ports, they function as a timer input/output, clock output, and buzzer output.

The following operating modes can be specified bit-wise.

(1) Port mode

Port 7 functions as a 6-bit input/output port. Bit-wise specification as an input port or output port is possible by means of port mode register 7 (PM7). On-chip pull-up resistors can be used by defining the pull-up resistor option register 7 (PU7). P70 and P71 are also 16-bit timer/event counter capture trigger signal input pins with a valid edge input.

(2) Control mode

Port 7 functions as timer input/output, clock output and buzzer output.

(a) TI00

External count clock input pin to 16-bit timer/event counter and capture trigger signal input pin to 16-bit timer/event counter capture register (CR01).

(b) TI01

Capture trigger signal input pin to 16-bit timer/event counter capture register (CR00).

(c) TI50 and TI51

8-bit timer/event counter external count clock input pins.

(d) TO0, TO50, and TO51

Timer output pins.

(e) PCL

Clock output pin.

(f) BUZ

Buzzer output pin.

3.2.9 AV_{REF}

This is an A/D converter reference voltage input pin.

When no A/D converter is used, connect this pin to V_{SS0}.

3.2.10 AV_{DD}

This is an analog power supply pin of A/D converter. Always use the same voltage as that of the V_{DD0} pin even when no A/D converter is used.

3.2.11 AV_{SS}

This is a ground voltage pin of A/D converter. Always use the same voltage as that of the V_{SS0} pin even when no A/D converter is used.

3.2.12 RESET

This is a low-level active system reset input pin.

3.2.13 X1 and X2

Crystal resonator connect pins for main system clock oscillation. For external clock supply, input clock signal to X1 and its inverted signal to X2.

3.2.14 XT1 and XT2

Crystal resonator connect pins for subsystem clock oscillation.

For external clock supply, input the clock signal to XT1 and its inverted signal to XT2.

3.2.15 V_{DD0} and V_{DD1}

V_{DD0} is a positive power supply port pin.

V_{DD1} is a positive power supply pin other than port pin.

3.2.16 V_{SS0} and V_{SS1}

V_{SS0} is a ground potential port pin.

V_{SS1} is a ground potential pin other than port pin.

3.2.17 V_{PP} (flash memory versions only)


High-voltage apply pin for flash memory programming mode setting and program write/verify. Connect directly to V_{SS0} or V_{SS1} in the normal operating mode.

3.2.18 IC (mask ROM version only)

The IC (Internally Connected) pin is provided to set the test mode to check the μ PD780024A, 780034A Subseries at delivery. Connect it directly to the V_{SS0} or V_{SS1} with the shortest possible wire in the normal operating mode.

When a voltage difference is produced between the IC pin and V_{SS0} pin or V_{SS1} pin, because the wiring between those two pins is too long or an external noise is input to the IC pin, the user's program may not operate normally.

- **Connect IC pins to V_{SS0} pins or V_{SS1} pins directly.**

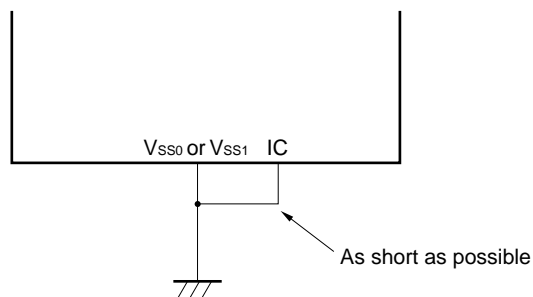

3.3 Pin Input/output Circuits and Recommended Connection of Unused Pins

Table 3-1 shows the types of pin input/output circuit and the recommended connections of unused pins. Refer to Figure 3-1 for the configuration of the input/output circuit of each type.

Table 3-1. Pin Input/Output Circuit Types (1/2)

Pin Name	Input/Output Circuit Type	Input/Output	Recommended Connection of Unused Pins		
P00/INTP0 to P02/INTP2	8-C	Input/output	Independently connect to V_{SS0} via a resistor.		
P03/INTP3/ADTRG					
P10/ANI0 to P17/ANI7	25	Input	Independently connect to V_{DD0} or V_{SS0} via a resistor.		
P20/SI30	8-C	Input/output			
P21/SO30	5-H				
P22/ $\overline{SCK30}$	8-C				
P23/RxD0					
P24/TxD0	5-H				
P25/ASCK0	8-C				
P30, P31 (for mask ROM version)	13-Q			Input/output	Independently connect to V_{DD0} via a resistor.
P30, P31 (for flash memory version)	13-P				
P32, P33 (for mask ROM version)	13-S				
P32, P33 (for flash memory version)	13-R				
P34/SI31	8-C	Independently connect to V_{DD0} or V_{SS0} via a resistor.			
P35/SO31	5-H				
P36/ $\overline{SCK31}$	8-C				
P40/AD0 to P47/AD7	5-H	Input/output	Independently connect to V_{DD0} via a resistor.		

Table 3-1. Pin Input/Output Circuit Types (2/2)

Pin Name	Input/Output Circuit Type	Input/Output	Recommended Connection of Unused Pins	
P50/A8 to P57/A15	5-H	Input/output	Independently connect to V_{DD0} or V_{SS0} via a resistor.	
P64/ \overline{RD}		Input/output		
P65/ \overline{WR}				
P66/ \overline{WAIT}				
P67/ASTB				
P70/TI00/TO0				8-C
P71/TI01				
P72/TI50/TO50				
P73/TI51/TO51				
P74/PCL				5-H
P75/BUZ				
\overline{RESET}	2	Input	—	
XT1	16	—	Connect to V_{DD0} .	
XT2			Leave open.	
AV_{DD}	—	—	Connect to V_{DD0} .	
AV_{REF}			Connect to V_{SS0} .	
AV_{SS}			Connect directly to V_{SS0} or V_{SS1} .	
IC (for mask ROM version)				
V_{PP} (for flash memory version)				

Figure 3-1. Pin Input/Output Circuit List (1/2)


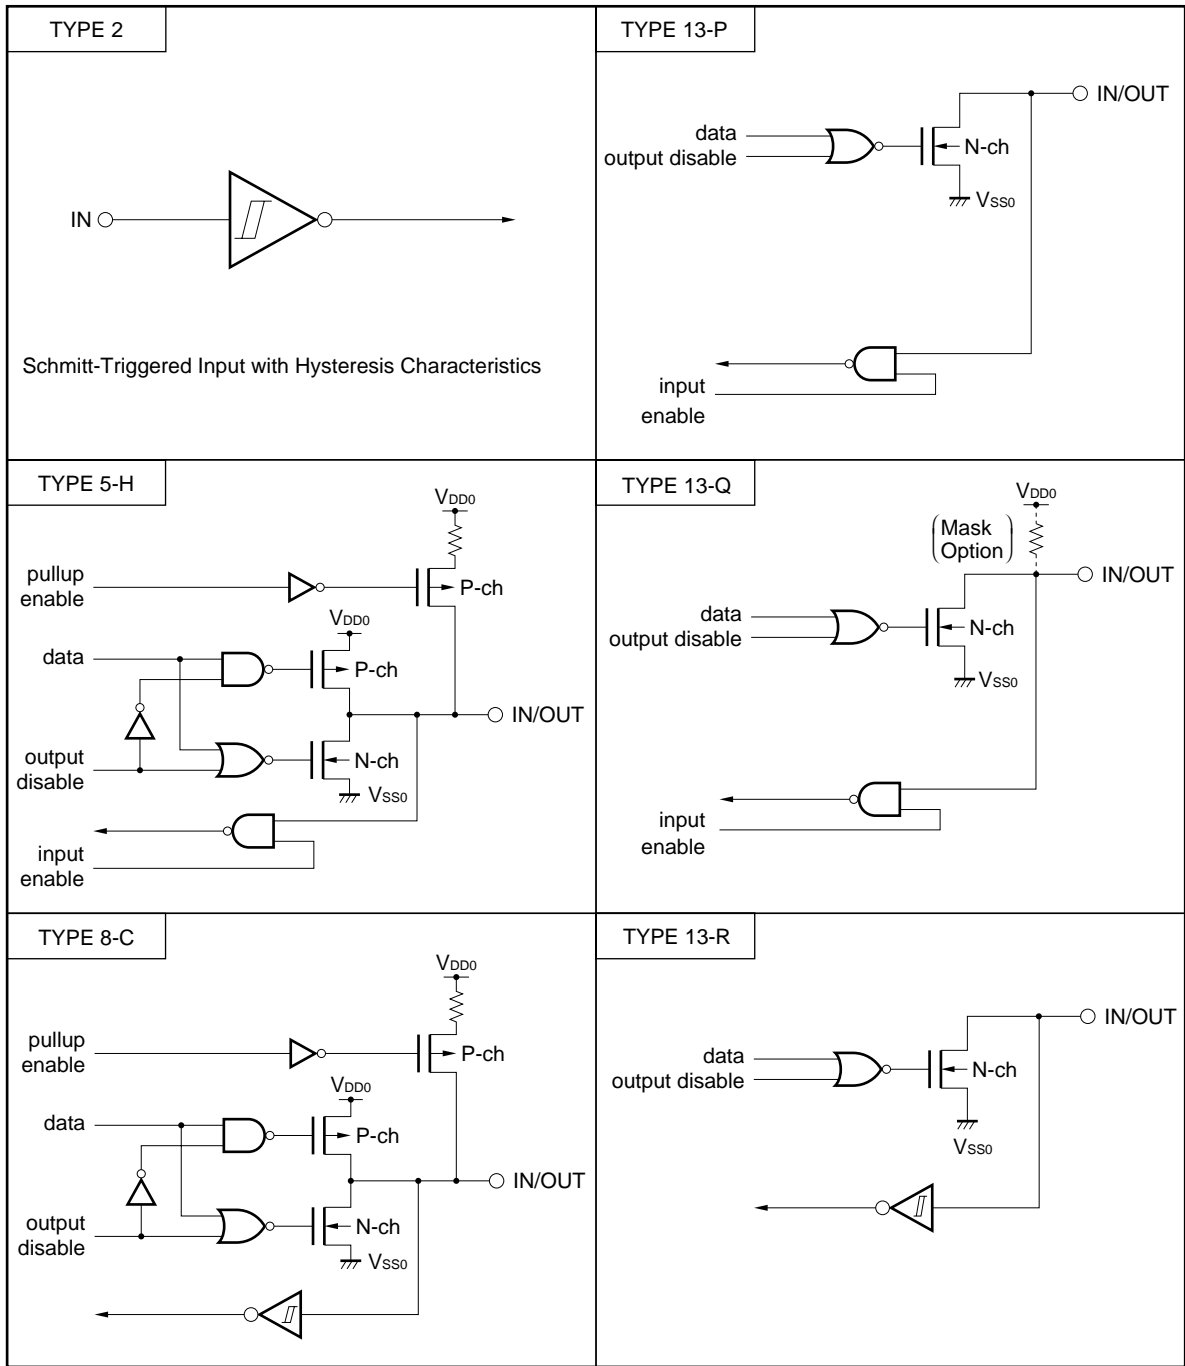


Figure 3-1. Pin Input/Output Circuit List (2/2)

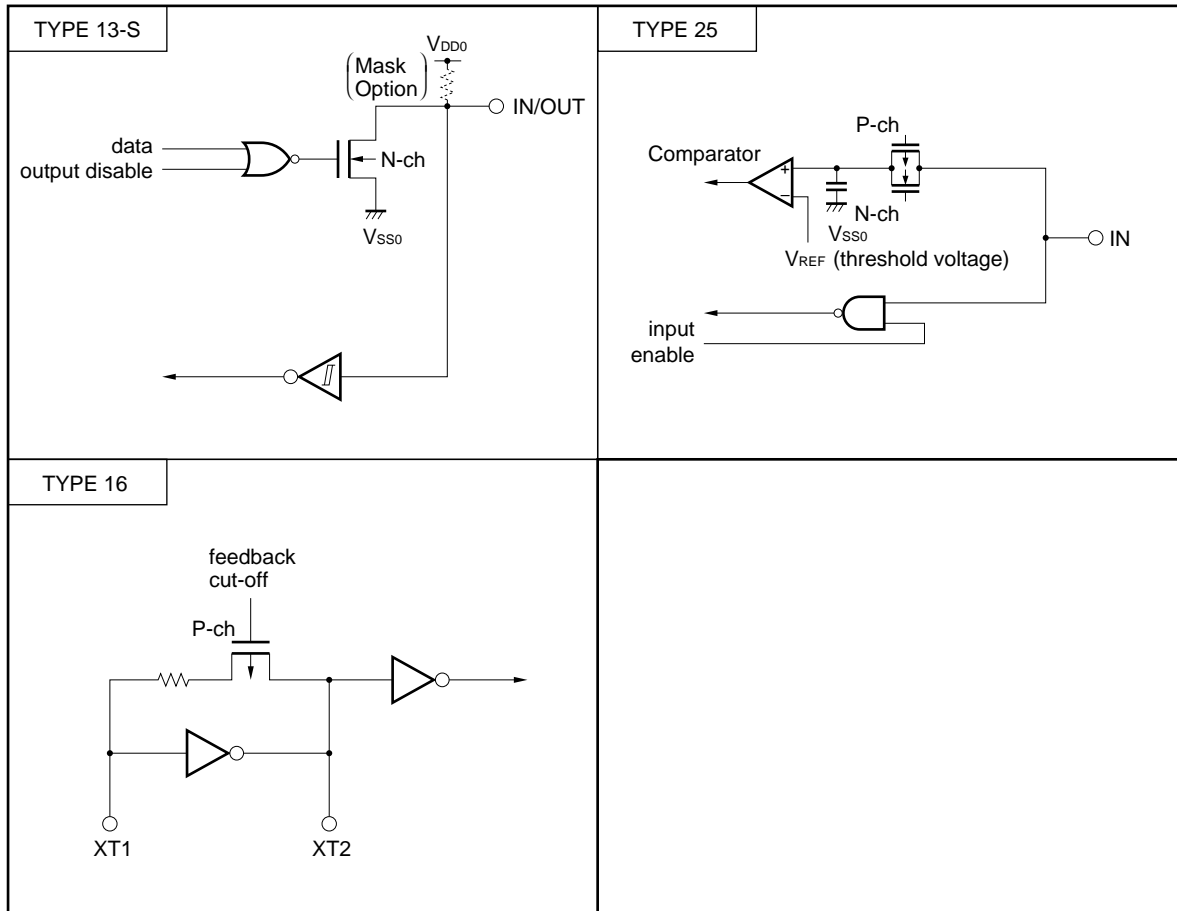

CHAPTER 4 PIN FUNCTION (μ PD780024AY, 780034AY SUBSERIES)

4.1 Pin Function List

(1) Port Pins (1/2)

Pin Name	Input/Output	Function		After Reset	Alternate Function	
P00	Input/Output	Port 0 4-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		Input	INTP0	
P01					INTP1	
P02					INTP2	
P03					INTP3/ADTRG	
P10 to P17	Input	Port 1 8-bit input only port.		Input	ANI0 to ANI7	
P20	Input/Output	Port 2 6-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		Input	SI30	
P21					SO30	
P22					SCK30	
P23					RxD0	
P24					TxD0	
P25					ASCK0	
P30	Input/Output	Port 3 7-bit input/output port Input/output mode can be specified bit-wise.	N-ch open-drain input/output port On-chip pull-up resistor can be specified by mask option. (P30 and P31 are Mask ROM version only.) LEDs can be driven directly.	Input	—	
P31					SDA0	
P32					SCL0	
P33		An on-chip pull-up resistor can be used by software.				—
P34						
P35						
P36						
P40 to P47	Input/Output	Port 4 8-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software. Interrupt request flag (KRIF) is set to 1 by falling edge detection.		Input	AD0 to AD7	
P50 to P57	Input/Output	Port 5 8-bit input/output port LEDs can be driven directly. Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		Input	A8 to A15	
P64	Input/Output	Port 6 4-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		Input	$\overline{\text{RD}}$	
P65					$\overline{\text{WR}}$	
P66					$\overline{\text{WAIT}}$	
P67					ASTB	

(1) Port Pins (2/2)

Pin Name	Input/Output	Function	After Reset	Alternate Function
P70	Input/Output	Port 7 6-bit input/output port Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.	Input	TI00/TO0
P71				TI01
P72				TI50/TO50
P73				TI51/TO51
P74				PCL
P75				BUZ

(2) Non-port Pins (1/2)

Pin Name	Input/Output	Function	After Reset	Alternate Function
INTP0	Input	External interrupt request input with specifiable valid edges (rising edge, falling edge, both rising and falling edges)	Input	P00
INTP1				P01
INTP2				P02
INTP3				P03/ADTRG
SI30	Input	Serial interface serial data input	Input	P20
SO30	Output	Serial interface serial data output	Input	P21
SDA0	Input/Output	Serial interface serial data input/output	Input	P32
$\overline{\text{SCK30}}$	Input/Output	Serial interface serial clock input/output	Input	P22
SCL0				P33
RxD0	Input	Asynchronous serial interface serial data input	Input	P23
TxD0	Output	Asynchronous serial interface serial data output	Input	P24
ASCK0	Input	Asynchronous serial interface serial clock input	Input	P25
TI00	Input	External count clock input to 16-bit timer (TM0) Capture trigger input to TM0 capture register (CR00, CR01)	Input	P70/TO0
TI01		Capture trigger input to TM0 capture register (CR00)		P71
TI50		External count clock input to 8-bit timer (TM50)		P72/TO50
TI51		External count clock input to 8-bit timer (TM51)		P73/TO51
TO0	Output	16-bit timer TM0 output	Input	P70/TO0
TO50		8-bit timer (TM50) output (also used for 8-bit PWM output)	Input	P72/TO50
TO51		8-bit timer (TM51) output (also used for 8-bit PWM output)		P73/TO51
PCL	Output	Clock output (for main system clock and subsystem clock trimming)	Input	P74
BUZ	Output	Buzzer output	Input	P75
AD0 to AD7	Input/Output	Lower-order address/data bus when expanding external memory	Input	P40 to P47
A8 to A15	Output	High-order address bus when expanding external memory	Input	P50 to P57
$\overline{\text{RD}}$	Output	Strobe signal output for read operation from external memory	Input	P64
$\overline{\text{WR}}$		Strobe signal output for write operation from external memory		P65
$\overline{\text{WAIT}}$	Input	Wait insertion when accessing external memory	Input	P66
ASTB	Output	Strobe output externally latching address information output to ports 4, 5 to access external memory	Input	P67

(2) Non-port Pins (2/2)

Pin Name	Input/Output	Function	After Reset	Alternate Function
ANI0 to ANI7	Input	A/D converter analog input	Input	P10 to P17
ADTRG	Input	A/D converter trigger signal input	Input	P03/INTP3
AV _{REF}	Input	A/D converter reference voltage input	—	—
AV _{DD}	—	A/D converter analog power supply. Connect to V _{DD0} or V _{DD1}	—	—
AV _{SS}	—	A/D converter ground potential. Connect to V _{SS0} or V _{SS1}	—	—
RESET	Input	System reset input	—	—
X1	Input	Crystal connection for main system clock oscillation	—	—
X2	—		—	—
XT1	Input	Crystal connection for subsystem clock oscillation	—	—
XT2	—		—	—
V _{DD0}	—	Positive power supply	—	—
V _{SS0}	—	Ground potential	—	—
V _{DD1}	—	Positive power supply other than port	—	—
V _{SS1}	—	Ground potential other than port	—	—
IC	—	Internally connected. Connect directly to V _{SS0} or V _{SS1}	—	—
V _{PP}	—	High-voltage application for program write/verify Connect directly to V _{SS0} or V _{SS1} in normal operating mode.	—	—

4.2 Description of Pin Functions

4.2.1 P00 to P03 (Port 0)

These are 4-bit input/output ports. Besides serving as input/output ports, they function as an external interrupt input, and A/D converter external trigger input pins.

The following operating modes can be specified bit-wise.

(1) Port mode

In this mode, these ports function as 4-bit input/output ports.

P00 to P03 can be specified for input or output ports bit-wise with a port mode register 0 (PM0). On-chip pull-up resistors can be used for them by setting pull-up resistor option register 0 (PU0).

(2) Control mode

In this mode, these ports function as an external interrupt request input, and A/D converter external trigger input pins.

(a) INTP0 to INTP3

INTP0 to INTP3 are external interrupt request input pins which can specify valid edges (rising edge, falling edge, and both rising and falling edges).

(b) ADTRG

A/D converter external trigger input pin.

Caution When P03 is used as an A/D converter external trigger input, specify the valid edge by bits 1, 2 (EGA00, EGA01) of A/D converter mode register 0 (ADM0) and set interrupt mask flag (PMK3) to 1.

4.2.2 P10 to P17 (Port 1)

These are 8-bit input only ports. Besides serving as input ports, they function as an A/D converter analog input. The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 8-bit input only ports.

(2) Control mode

These ports function as A/D converter analog input pins (ANI0 to ANI7).

4.2.3 P20 to P25 (Port 2)

These are 6-bit input/output ports. Besides serving as input/output ports, they function as data input/output to/from the serial interface and clock input/output functions.

The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 6-bit input/output ports. They can be specified bit-wise as input or output ports with port mode register 2 (PM2). On-chip pull-up resistors can be used for them by setting pull-up resistor option register 2 (PU2).

(2) Control mode

These ports function as serial interface data input/output and clock input/output.

(a) SI30 and SO30

Serial interface serial data input/output pins.

(b) $\overline{\text{SCK30}}$

Serial interface serial clock input/output pin.

(c) RxD0, TxD0

Asynchronous serial interface serial data input/output pins.

(d) ASCK0

Asynchronous serial interface serial clock input pin.

4.2.4 P30 to P36 (Port 3)

These are 7-bit input/output ports. Beside serving as input/output ports, they function as serial interface data input/output and clock input/output.

P30 to P33 (Port 3) can drive LEDs directly.

The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 7-bit input/output ports. They can be specified bit-wise as input or output ports with port mode register 3 (PM3). P30 to P33 are N-ch open drain output. Mask ROM version can contain pull-up resistors in P30 and P31 with the mask option. On-chip pull-up resistors of P34 to P36 can be used by defining the pull-up resistor option register 3 (PU3).

(2) Control mode

These ports function as serial interface serial data input/output and clock input/output.

(a) SDA0

Serial interface serial data input/output pin.

(b) SCL0

Serial interface serial clock input/output pin.

4.2.5 P40 to P47 (Port 4)

These are 8-bit input/output ports. Besides serving as input/output ports, they function as an address/data bus. The interrupt request flag (KRIF) can be set to 1 by detecting a falling edge. The following operating mode can be specified bit-wise.

Caution When using the falling edge detection interrupt (INTKR), be sure to set the memory expansion mode register (MEM) to 01H.

(1) Port mode

These ports function as 8-bit input/output ports. They can be specified bit-wise for input or output ports by using the port mode register 4 (PM4). On-chip pull-up resistors can be used by setting pull-up resistor option register 4 (PU4).

(2) Control mode

These ports function as low-order address/data bus pins (AD0 to AD7) in external memory expansion mode.

4.2.6 P50 to P57 (Port 5)

These are 8-bit input/output ports. Besides serving as input/output ports, they function as an address bus. Port 5 can drive LEDs directly. The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 8-bit input/output ports. They can be specified bit-wise as input/output ports with port mode register 5 (PM5). On-chip pull-up resistors can be used by setting pull-up resistor option register 5 (PU5).

(2) Control mode

These ports function as high-order address bus pins (A8 to A15) in external memory expansion mode.

4.2.7 P64 to P67 (Port 6)

These are 4-bit input/output ports. Besides serving as input/output ports, they are used for control in external memory expansion mode.

The following operating modes can be specified bit-wise.

(1) Port mode

These ports function as 4-bit input/output ports. They can be specified bit-wise as input or output ports with port mode register 6 (PM6).

On-chip pull-up resistors can be used by setting pull-up resistor option register 6 (PU6).

(2) Control mode

These ports function as control signal output pins ($\overline{\text{RD}}$, $\overline{\text{WR}}$, $\overline{\text{WAIT}}$, $\overline{\text{ASTB}}$) in external memory expansion mode.

Caution When external wait is not used in external memory expansion mode, P66 can be used as an input/output port.

4.2.8 P70 to P75 (Port 7)

These are 6-bit input/output ports. Besides serving as input/output ports, they function as a timer input/output, clock output, and buzzer output.

The following operating modes can be specified bit-wise.

(1) Port mode

Port 7 functions as a 6-bit input/output port. Bit-wise specification as an input port or output port is possible by means of port mode register 7 (PM7). On-chip pull-up resistors can be used by setting pull-up resistor option register 7 (PU7). P70 and P71 also become a 16-bit timer/event counter capture trigger signal input pin with a valid edge input.

(2) Control mode

Port 7 functions as timer input/output, clock output and buzzer output.

(a) TI00

Pin for external count clock input to the 16-bit timer/event counter and pin for capture trigger signal input to the 16-bit timer/event counter capture register (CR01).

(b) TI01

Pin for capture trigger signal input to the 16-bit timer/event counter capture register (CR00).

(c) TI50, TI51

Pin for external count clock input to the 8-bit timer/event counter.

(d) T00, T050, T051

Timer output pin.

(e) PCL

Clock output pin.

(f) BUZ

Buzzer output pin.

4.2.9 AVREF

This is an A/D converter reference voltage input pin.

When no A/D converter is used, connect this pin to V_{SS0}.

4.2.10 AVDD

This is an analog power supply pin of A/D converter. Always use the same voltage as that of the V_{DD0} pin even when no A/D converter is used.

4.2.11 AVSS

This is a ground voltage pin of A/D converter. Always use the same voltage as that of the V_{SS0} pin even when no A/D converter is used.

4.2.12 RESET

This is a low-level active system reset input pin.

4.2.13 X1 and X2

Crystal resonator connect pins for main system clock oscillation. For external clock supply, input the clock signal to X1 and its inverted signal to X2.

4.2.14 XT1 and XT2

Crystal resonator connect pins for subsystem clock oscillation.

For external clock supply, input the clock signal to XT1 and its inverted signal to XT2.

4.2.15 V_{DD0} and V_{DD1}

V_{DD0} is a positive power supply pin.

V_{DD1} is a positive power supply pin other than port pin.

4.2.16 V_{SS0} and V_{SS1}

V_{SS0} is a ground potential port pin.

V_{SS1} is a ground potential pin other than port pin.

4.2.17 V_{PP} (flash memory versions only)


High-voltage apply pin for flash memory programming mode setting and program write/verify. Connect directly to V_{SS0} or V_{SS1} in normal operating mode.

4.2.18 IC (Mask ROM version only)

The IC (Internally Connected) pin is provided to set the test mode to check the μ PD780024AY, 780034AY Subseries at delivery. Connect it directly to the V_{SS0} or V_{SS1} with the shortest possible wire in the normal operating mode.

When a voltage difference is produced between the IC pin and V_{SS0} pin or V_{SS1} pin, because the wiring between those two pins is too long or an external noise is input to the IC pin, the user's program may not operate normally.

- **Connect IC pins to V_{SS0} pins or V_{SS1} pins directly.**

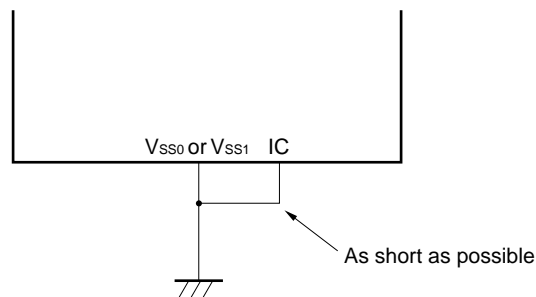

4.3 Pin Input/output Circuits and Recommended Connection of Unused Pins

Table 4-1 shows the types of pin input/output circuit and the recommended connections of unused pins. Refer to Figure 4-1 for the configuration of the input/output circuit of each type.

Table 4-1. Pin Input/Output Circuit Types (1/2)

Pin Name	Input/Output Circuit Type	Input/Output	Recommended Connection of Unused Pins		
P00/INTP0 to P02/INTP2	8-C	Input/output	Independently connect to V_{SS0} via a resistor.		
P03/INTP3/ADTRG					
P10/ANI0 to P17/ANI7	25	Input	Independently connect to V_{DD0} or V_{SS0} via a resistor.		
P20/SI30	8-C	Input/output			
P21/SO30	5-H				
P22/ $\overline{\text{SCK30}}$	8-C				
P23/RxD0					
P24/TxD0	5-H				
P25/ASCK0	8-C				
P30, P31 (for mask ROM version)	13-Q			Input/output	Independently connect to V_{SS0} via a resistor.
P30, P31 (for flash memory version)	13-P				
P32/SDA0	13-R	Input/output	Independently connect to V_{DD0} or V_{SS0} via a resistor.		
P33/SCL0					
P34	8-C				
P35	5-H				
P36	8-C				
P40/AD0 to P47/AD7	5-H			Input/output	Independently connect to V_{SS0} via a resistor.

Table 4-1. Pin Input/Output Circuit Types (2/2)

Pin Name	Input/Output Circuit Type	Input/Output	Recommended Connection of Unused Pins	
P50/A8 to P57/A15	5-H	Input/output	Independently connect to V_{DD0} or V_{SS0} via a resistor.	
P64/ \overline{RD}		Input/output		
P65/ \overline{WR}				
P66/ \overline{WAIT}				
P67/ASTB				
P70/TI00/TO0				8-C
P71/TI01				
P72/TI50/TO50				
P73/TI51/TO51				
P74/PCL				5-H
P75/BUZ				
\overline{RESET}	2	Input	—	
XT1	16	—	Connect to V_{DD0}	
XT2			Leave open.	
AV_{DD}	—	—	Connect to V_{DD0}	
AV_{REF}			Connect to V_{SS0}	
AV_{SS}			Connect directly to V_{SS0} or V_{SS1}	
IC (for mask ROM version)				
V_{PP} (for flash memory version)				

Figure 4-1. Pin Input/Output Circuit List (1/2)


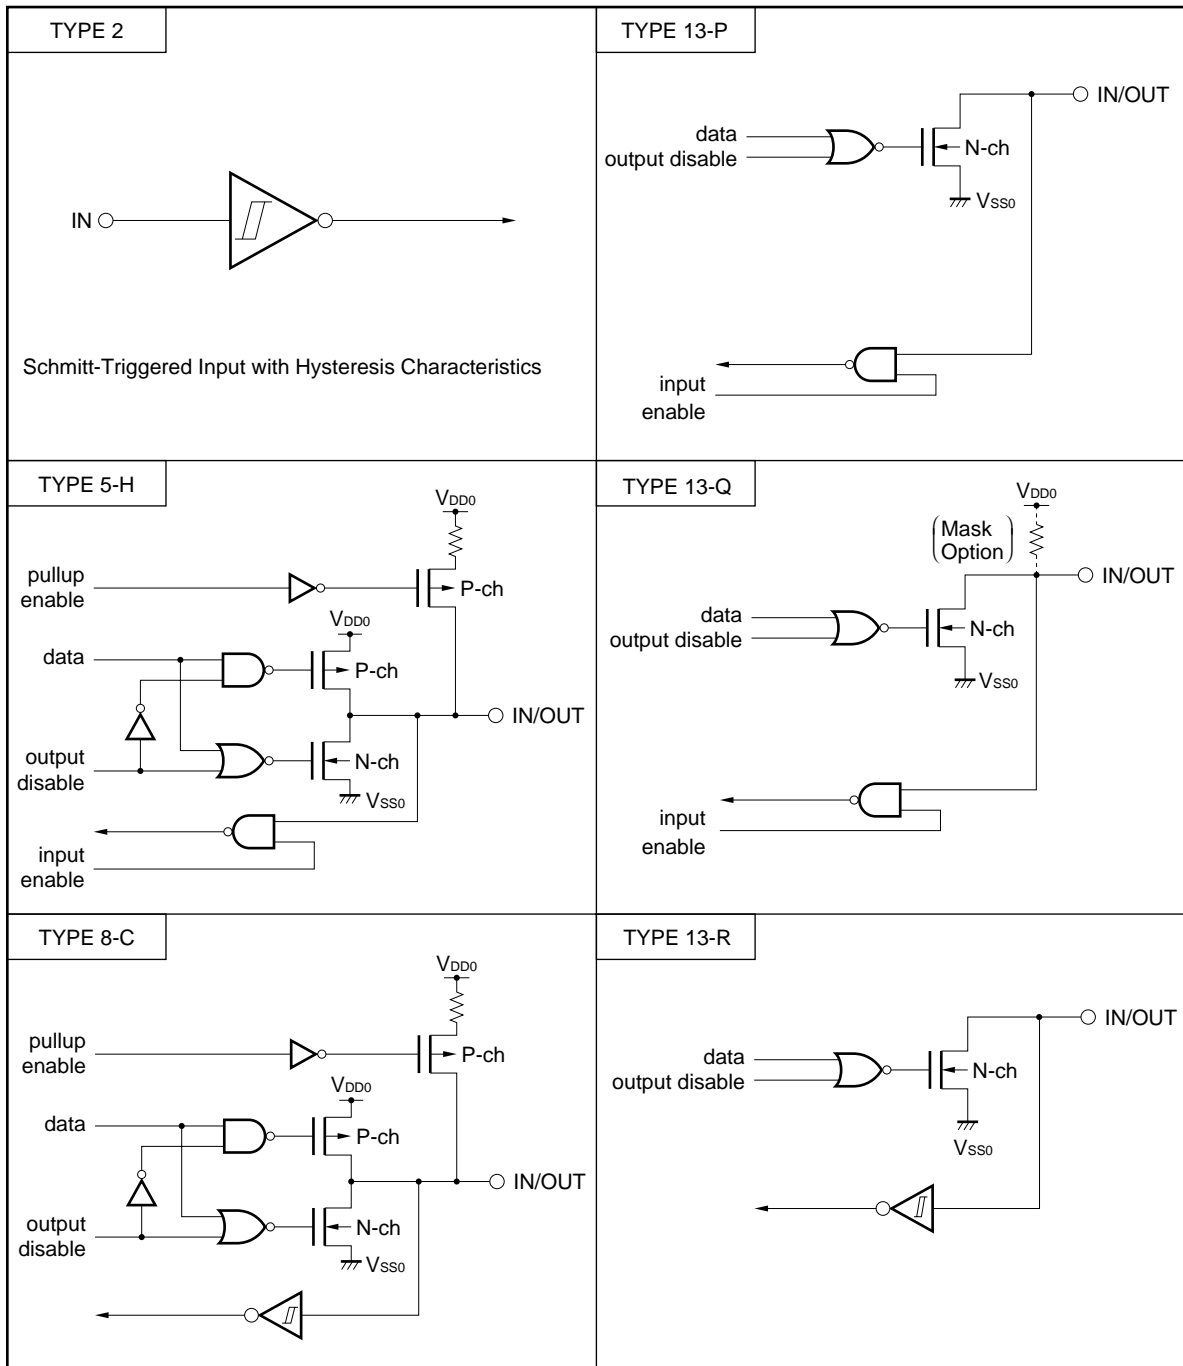


Figure 4-1. Pin Input/Output Circuit List (2/2)

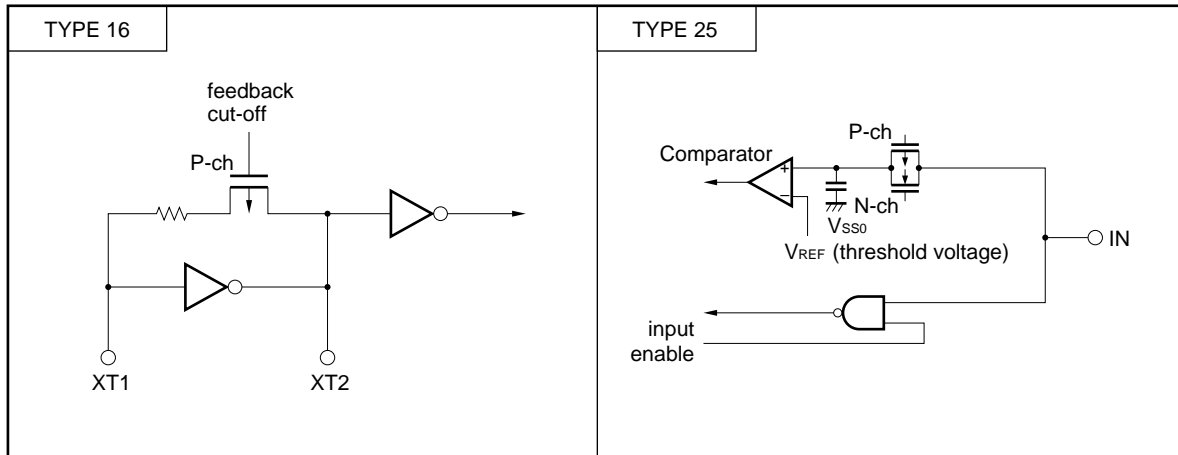

CHAPTER 5 CPU ARCHITECTURE

5.1 Memory Spaces

μ PD780024A, 780034A, 780024AY, 780034AY Subseries can access 64-Kbyte memory space respectively. Figures 5-1 to 5-5 show memory maps.

Caution In case of the internal memory capacity, the initial value of memory size switching register (IMS) of all products (μ PD780024A, 780034A, 780024AY, and 780034AY Subseries) is fixed (CFH). Therefore, set the value corresponding to each products indicated below.

- μ PD780021A, 780031A, 780021AY, 780031AY : 42H
- μ PD780022A, 780032A, 780022AY, 780032AY : 44H
- μ PD780023A, 780033A, 780023AY, 780033AY : C6H
- μ PD780024A, 780034A, 780024AY, 780034AY : C8H
- μ PD78F0034A, 78F0034AY : Value for mask ROM version

Figure 5-1. Memory Map (μ PD780021A, 780031A, 780021AY, 780031AY)

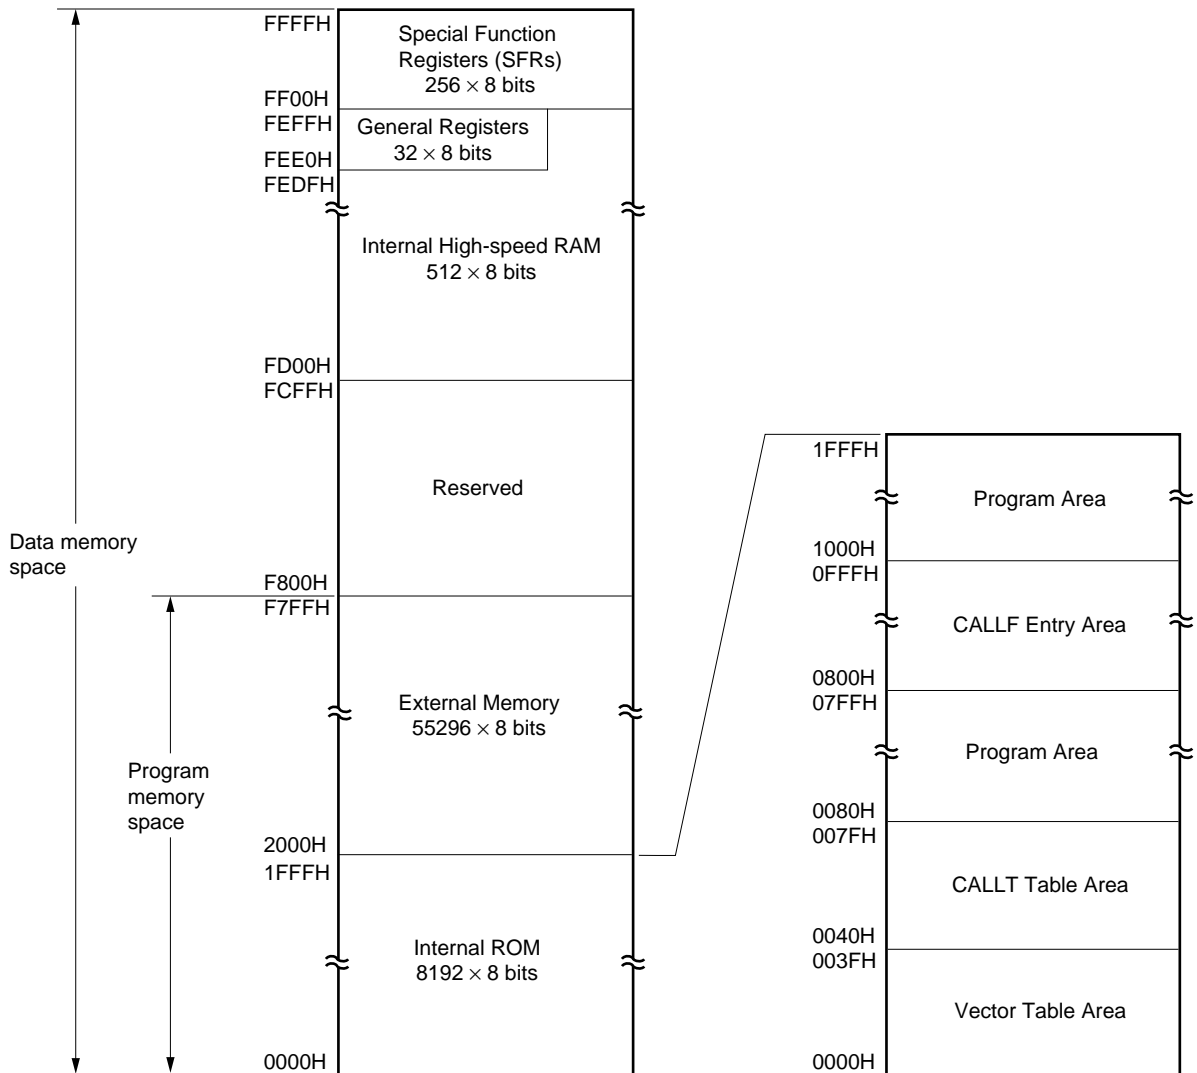


Figure 5-2. Memory Map (μ PD780022A, 780032A, 780022AY, 780032AY)

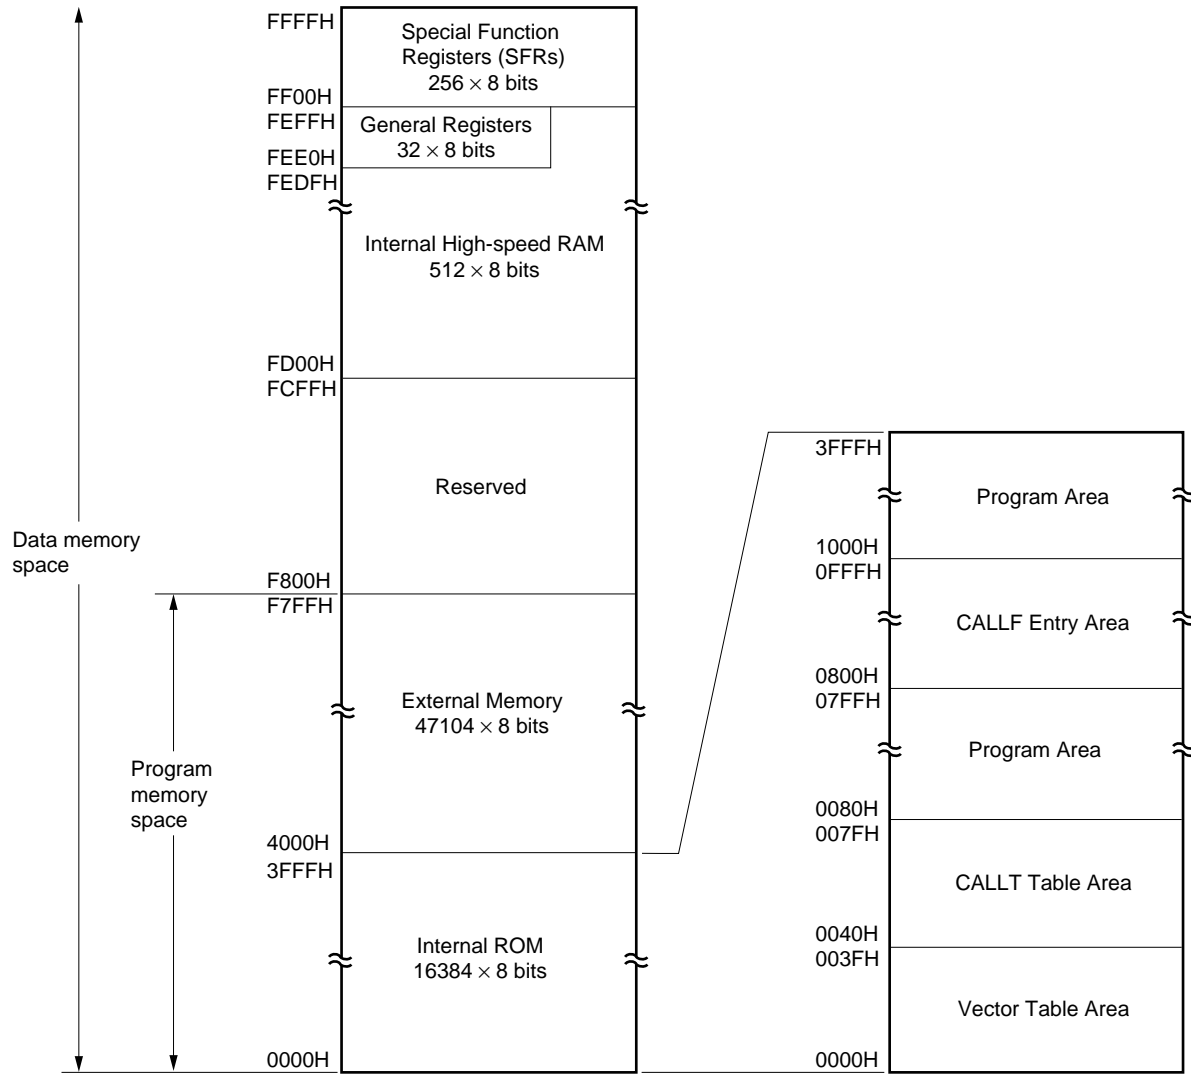


Figure 5-3. Memory Map (μ PD780023A, 780033A, 780023AY, 780033AY)

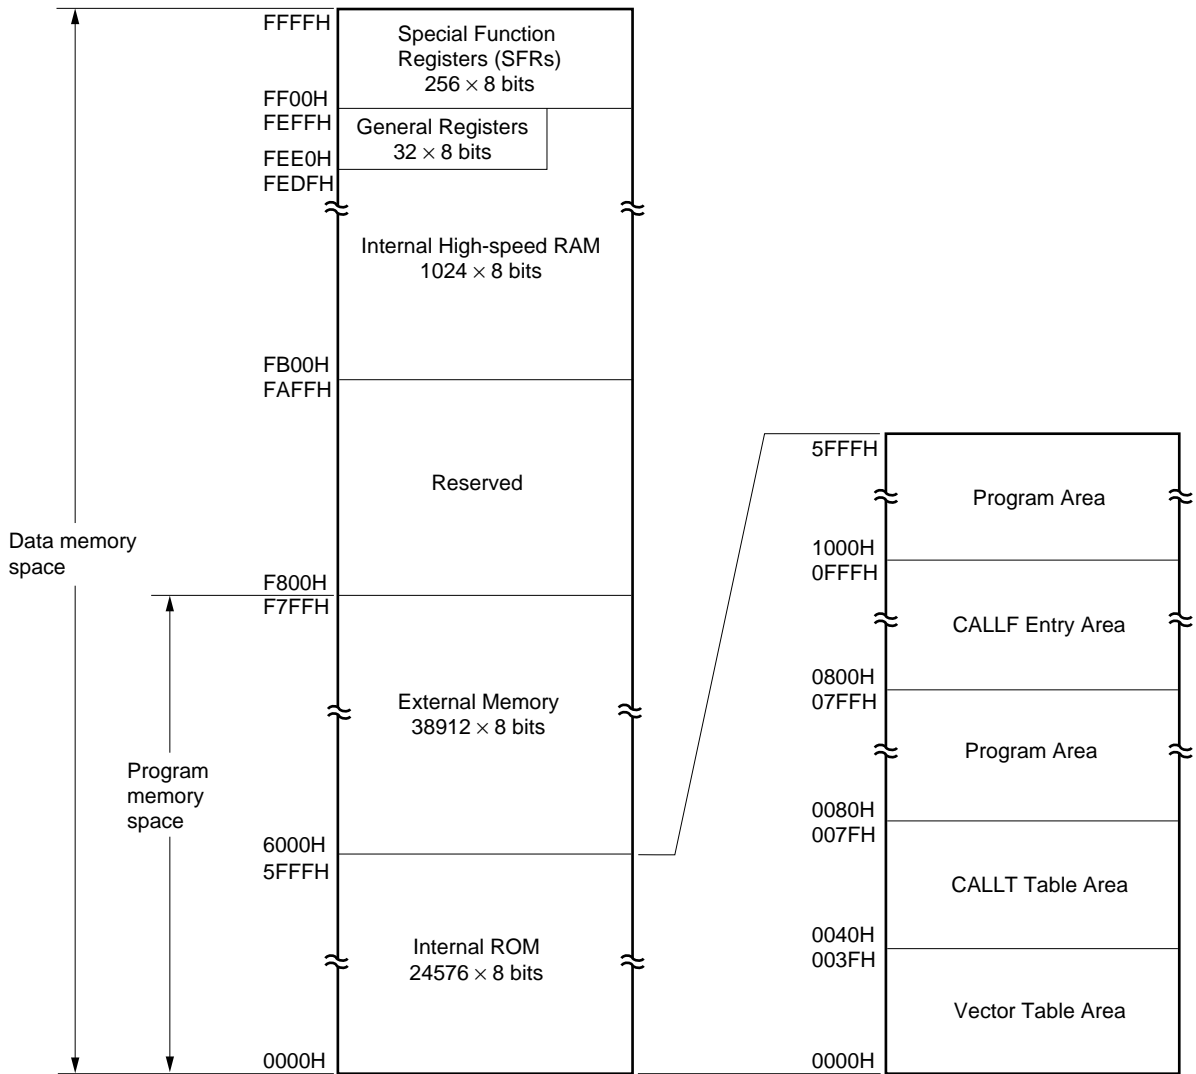


Figure 5-4. Memory Map (μ PD780024A, 780034A, 780024AY, 780034AY)


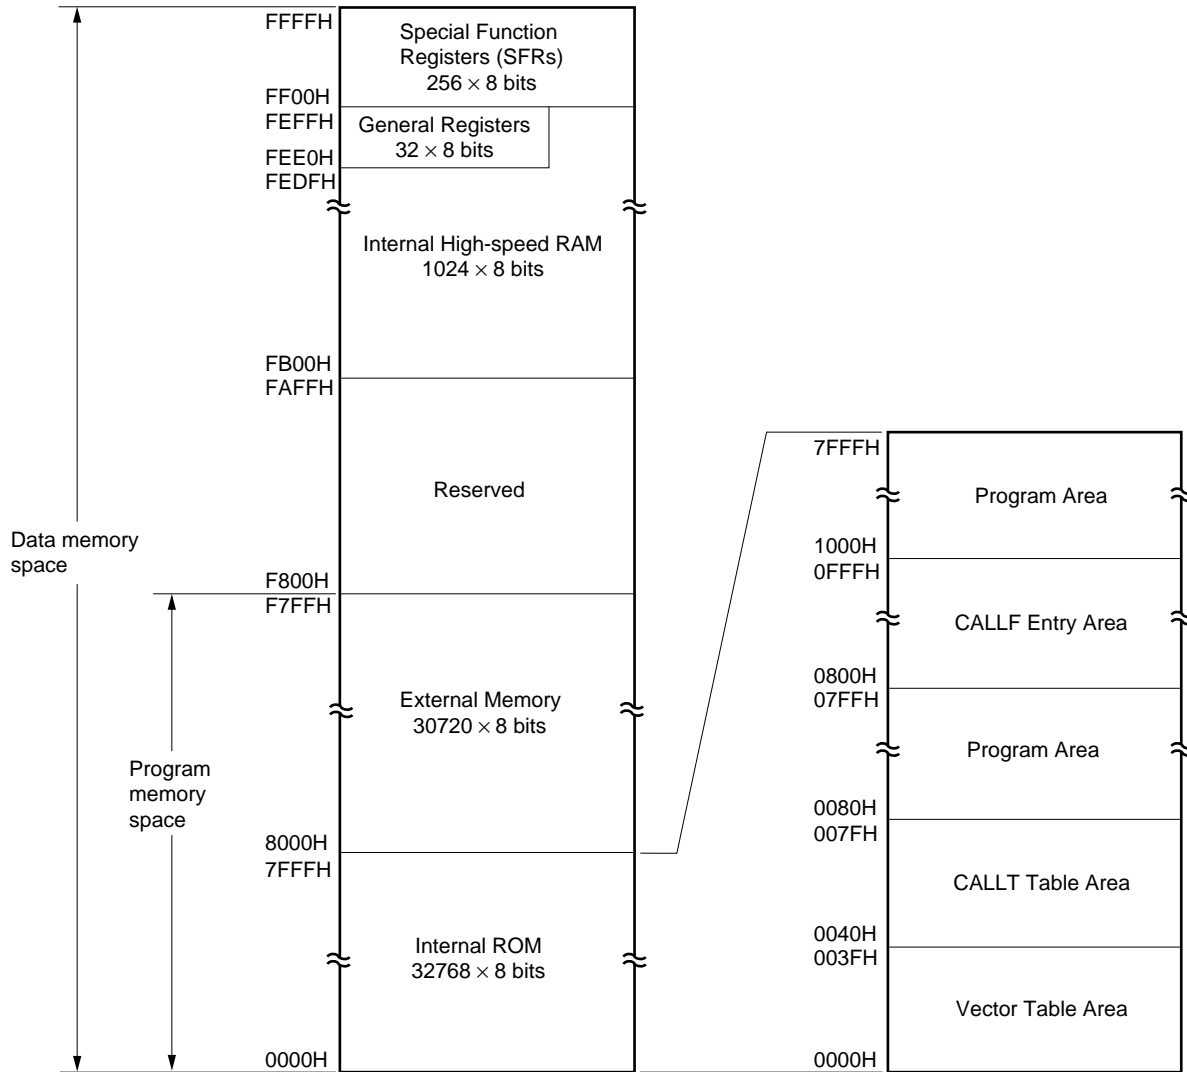


Figure 5-5. Memory Map (μ PD78F0034A, 78F0034AY)

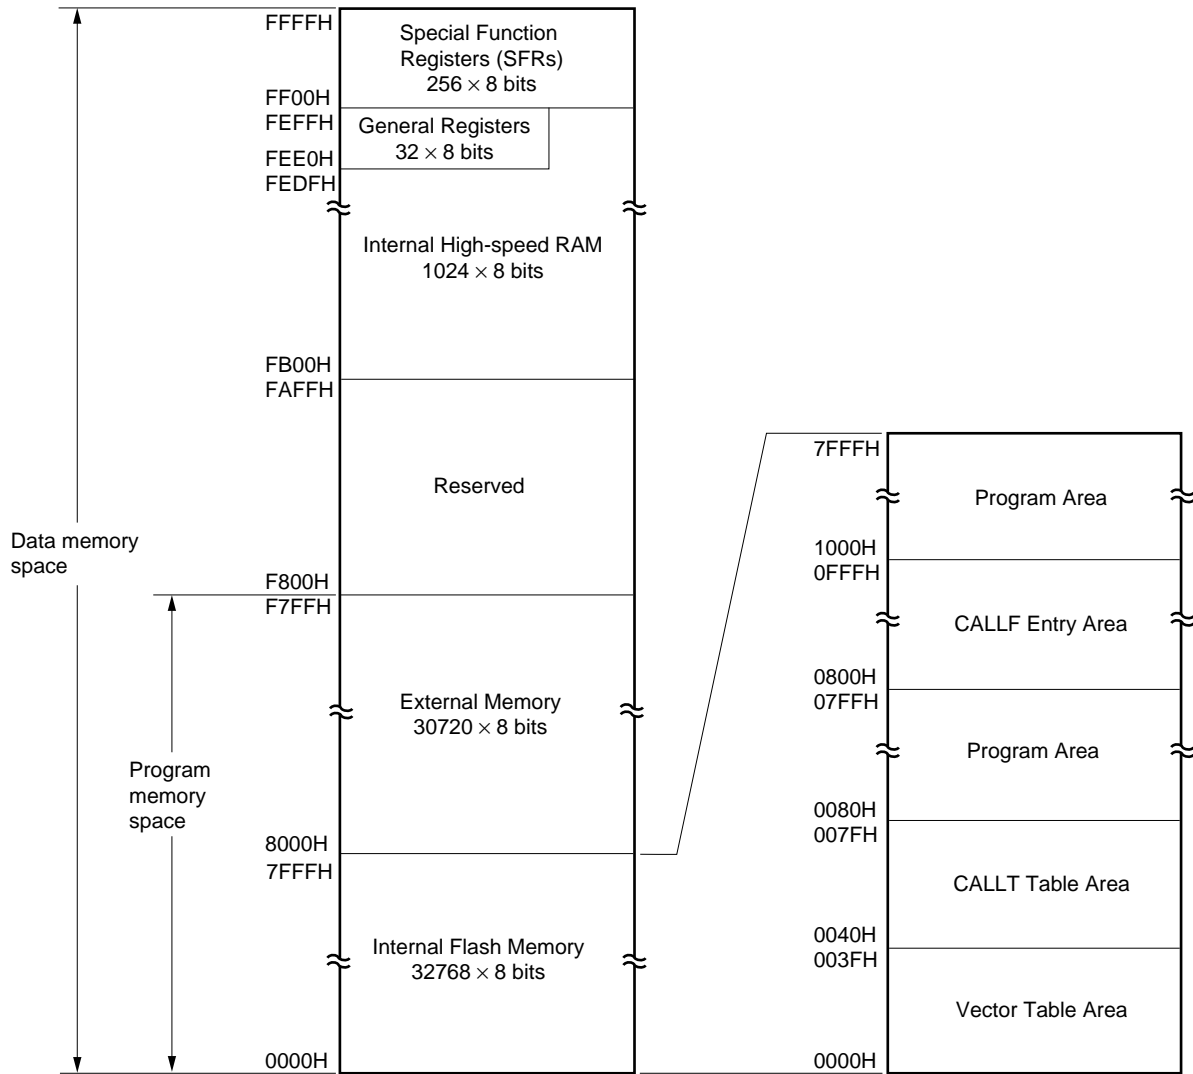

5.1.1 Internal program memory space

The internal program memory space contains the program and table data. Normally, it is addressed with the program counter (PC).

The μ PD780024A, 780034A, 780024AY, and 780034AY Subseries products incorporate an on-chip ROM (or flash memory), as listed below.

Table 5-1. Internal ROM Capacity

Part Number	Internal ROM	
	Type	Capacity
μ PD780021A, 780031A, 780021AY, 780031AY	Mask ROM	8192 \times 8 bits (0000H to 1FFFH)
μ PD780022A, 780032A, 780022AY, 780032AY		16384 \times 8 bits (0000H to 3FFFH)
μ PD780023A, 780033A, 780023AY, 780033AY		24576 \times 8 bits (0000H to 5FFFH)
μ PD780024A, 780034A, 780024AY, 780034AY		32768 \times 8 bits (0000H to 7FFFH)
μ PD78F0034A, 78F0034AY	Flash Memory	32768 \times 8 bits (0000H to 7FFFH)

The internal program memory space is divided into the following three areas.

(1) Vector table area

The 64-byte area 0000H to 003FH is reserved as a vector table area. The $\overline{\text{RESET}}$ input and program start addresses for branch upon generation of each interrupt request are stored in the vector table area. Of the 16-bit address, low-order 8 bits are stored at even addresses and high-order 8 bits are stored at odd addresses.

Table 5-2. Vector Table

Vector Table Address	Interrupt Source
0000H	$\overline{\text{RESET}}$ input
0004H	INTWDT
0006H	INTP0
0008H	INTP1
000AH	INTP2
000CH	INTP3
000EH	INTSER0
0010H	INTSR0
0012H	INTST0
0014H	INTCSI30
0016H	INTCSI31 Note 1
0018H	INTIIC0 Note 2
001AH	INTWTI
001CH	INTTM00
001EH	INTTM01
0020H	INTTM50
0022H	INTTM51
0024H	INTAD0
0026H	INTWT
0028H	INTKR
003EH	BRK

Notes 1. μ PD780024A, 780034A Subseries only

2. μ PD780024AY, 780034AY Subseries only

(2) CALLT instruction table area

The 64-byte area 0040H to 007FH can store the subroutine entry address of a 1-byte call instruction (CALLT).

(3) CALLF instruction entry area

The area 0800H to 0FFFH can perform a direct subroutine call with a 2-byte call instruction (CALLF).

5.1.2 Internal data memory space

The μ PD780024A, 780034A, 780024AY, and 780034AY Subseries products incorporate an on-chip high-speed RAM, as listed below.

Table 5-3. Internal High-Speed RAM Capacity

Part Number	Internal High-Speed RAM
μ PD780021A, 780031A, 780021AY, 780031AY	512 \times 8 bits (FD00H to FEFFH)
μ PD780022A, 780032A, 780022AY, 780032AY	
μ PD780023A, 780033A, 780023AY, 780033AY	1024 \times 8 bits (FB00H to FEFFH)
μ PD780024A, 780034A, 780024AY, 780034AY	
μ PD78F0034A, 78F0034AY	

The 32-byte area FEE0H to FEFFH is allocated four general-purpose register banks composed of eight 8-bit registers.

The internal high-speed RAM can also be used as a stack memory.

5.1.3 Special Function Register (SFR) area

An on-chip peripheral hardware special function register (SFR) is allocated in the area FF00H to FFFFH. (Refer to **5.2.3 Special Function Register (SFR) Table 5-5. Special Function Register List.**)

Caution Do not access addresses where the SFR is not assigned.

5.1.4 External memory space

The external memory space is accessible with memory expansion mode register. External memory space can store program, table data, etc., and allocate peripheral devices.

5.1.5 Data memory addressing

Addressing refers to the method of specifying the address of the instruction to be executed next or the address of the register or memory relevant to the execution of instructions.

The address of an instruction to be executed next is addressed by the program counter (PC) (for details, see **5.3 Instruction Address Addressing**).

Several addressing modes are provided for addressing the memory relevant to the execution of instructions for the μ PD780024A, 780034A, 780024AY, and 780034AY Subseries, based on operability and other considerations. For areas containing data memory in particular, special addressing methods designed for the functions of special function registers (SFR) and general-purpose registers are available for use. Data memory addressing is illustrated in Figures 5-6 to 5-10. For the details of each addressing mode, see **5.4 Operand Address Addressing**.

Figure 5-6. Data Memory Addressing (μ PD780021A, 780031A, 780021AY, 780031AY)

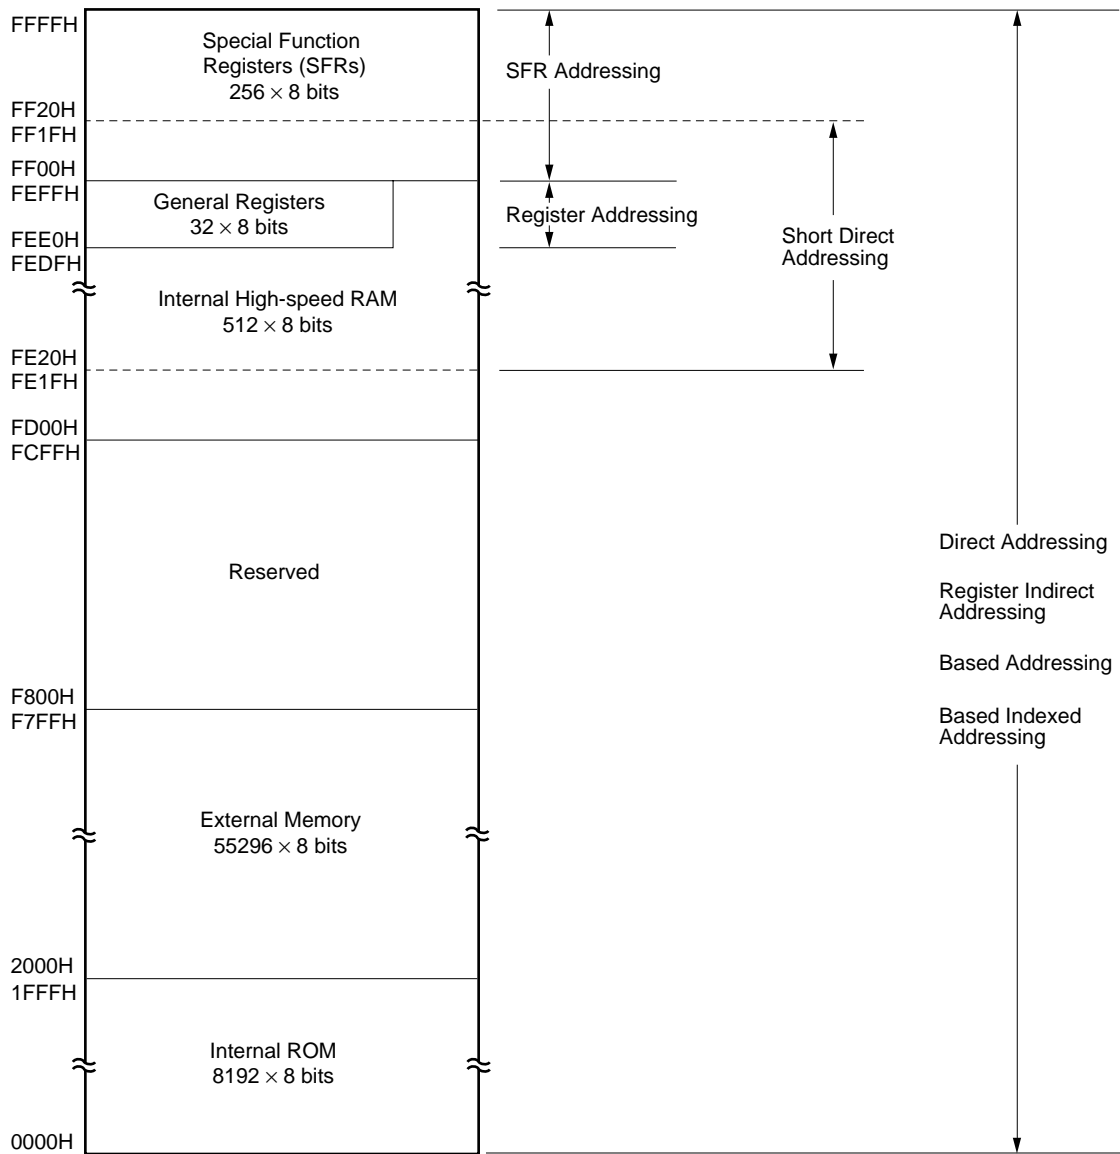


Figure 5-7. Data Memory Addressing (μ PD780022A, 780032A, 780022AY, 780032AY)

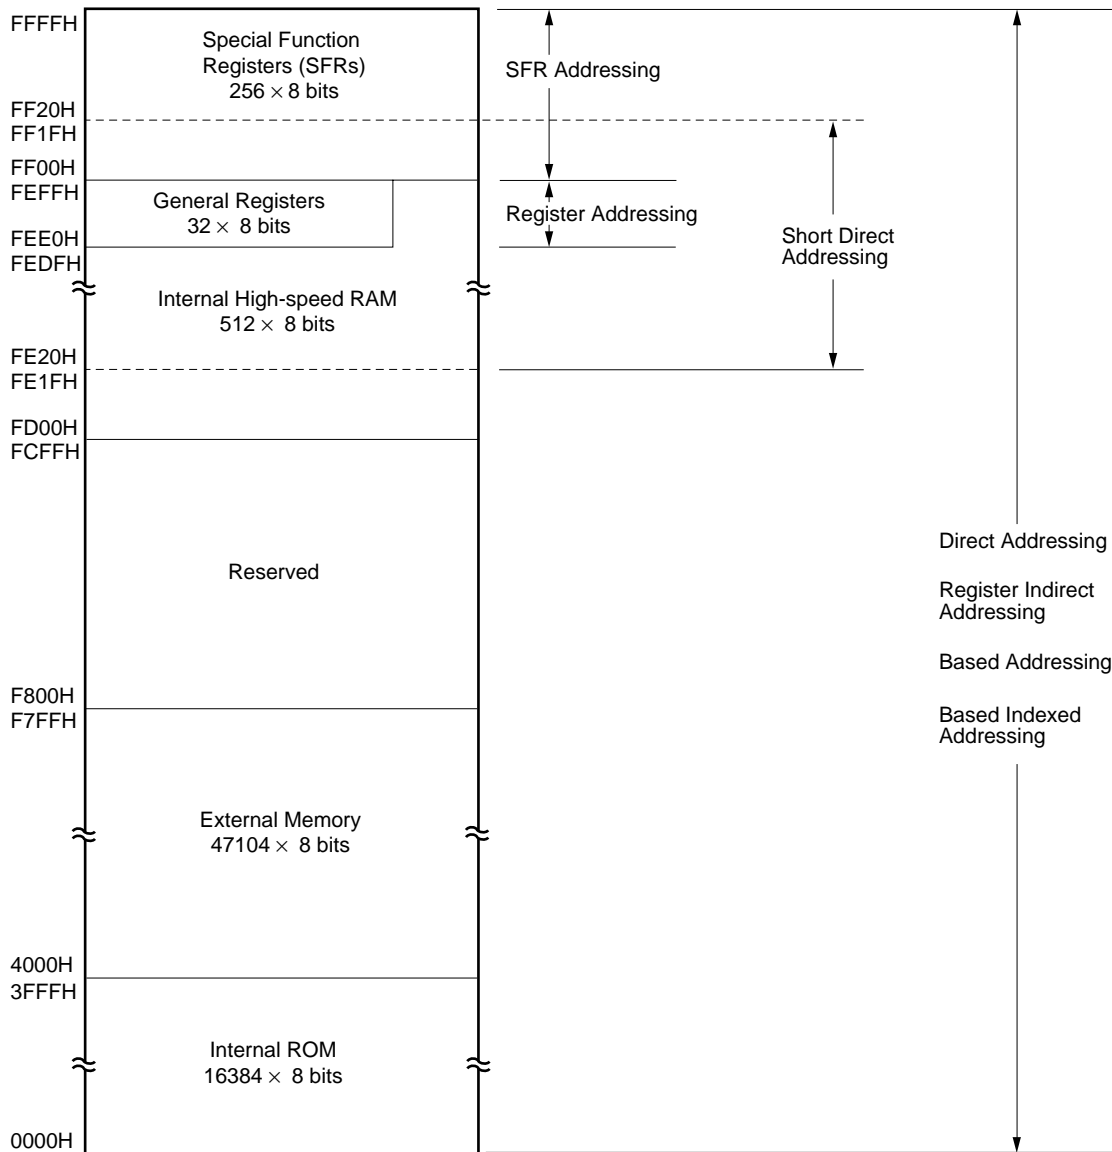


Figure 5-8. Data Memory Addressing (μ PD780023A, 780033A, 780023AY, 780033AY)

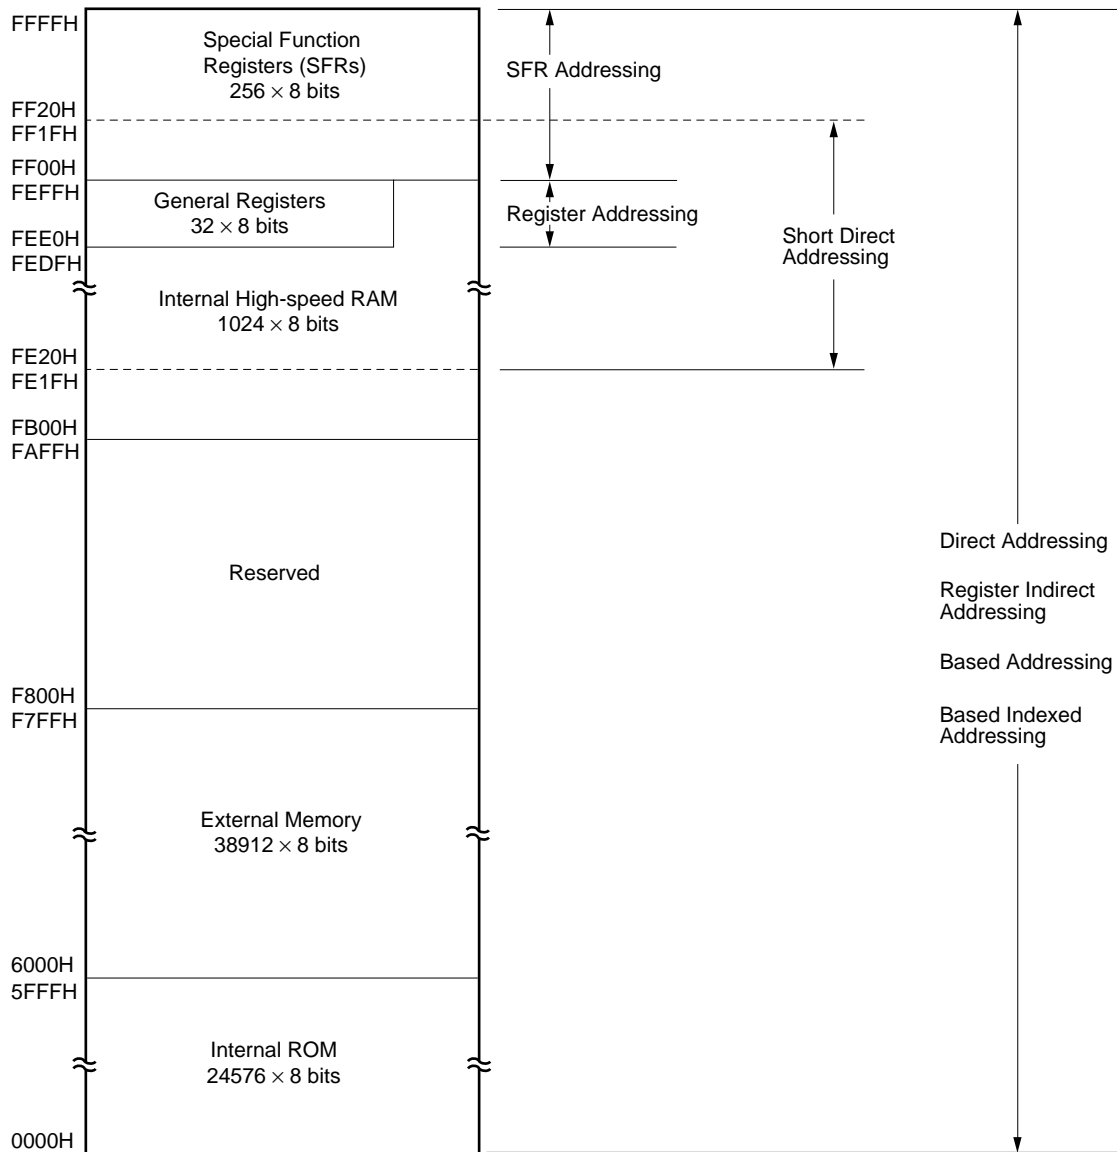


Figure 5-9. Data Memory Addressing (μ PD780024A, 780034A, 780024AY, 780034AY)


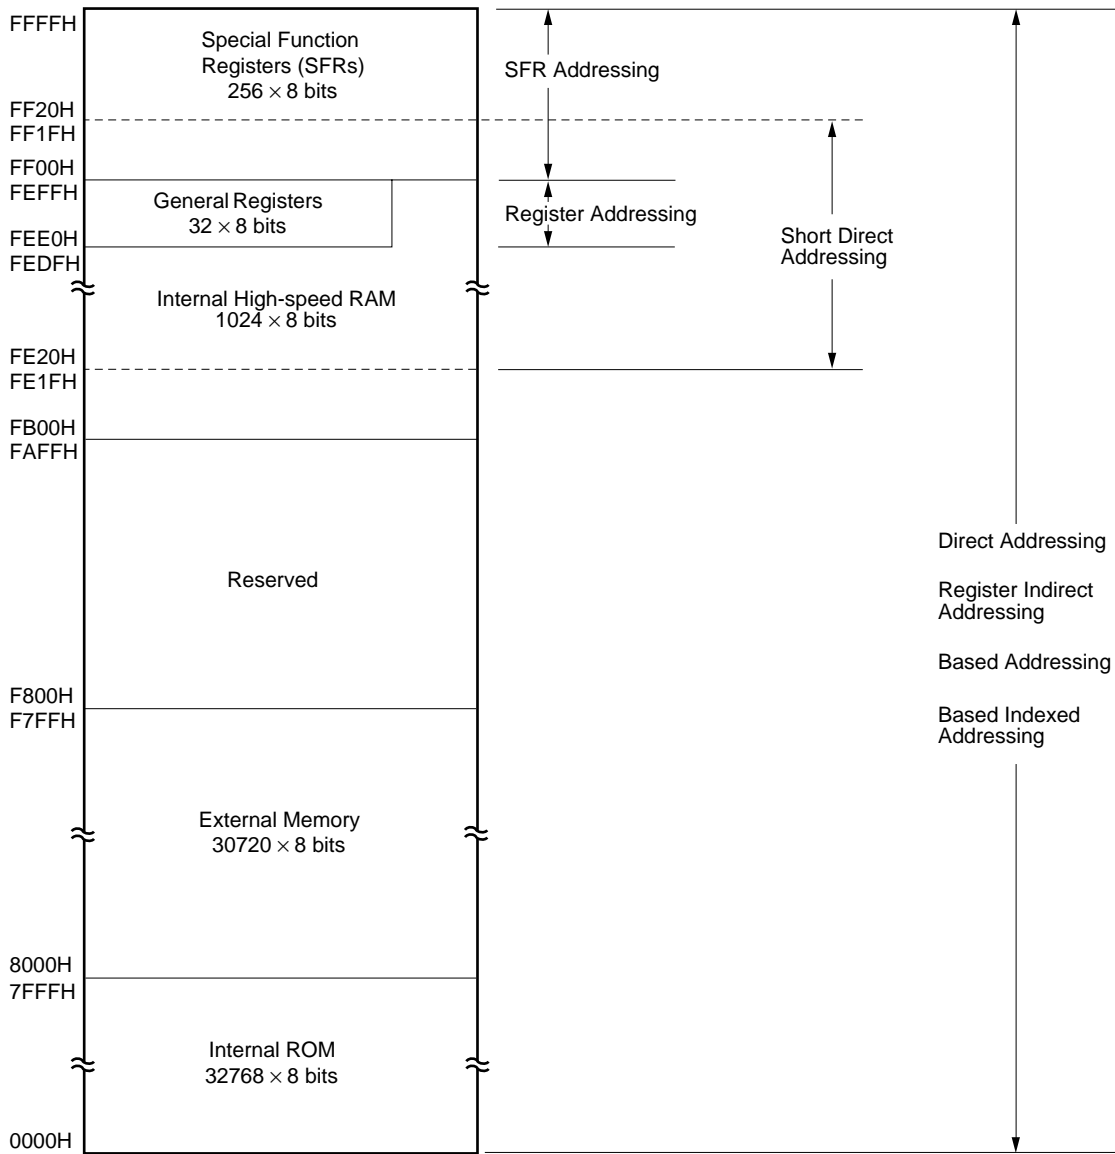


Figure 5-10. Data Memory Addressing (μ PD78F0034A, 78F0034AY)

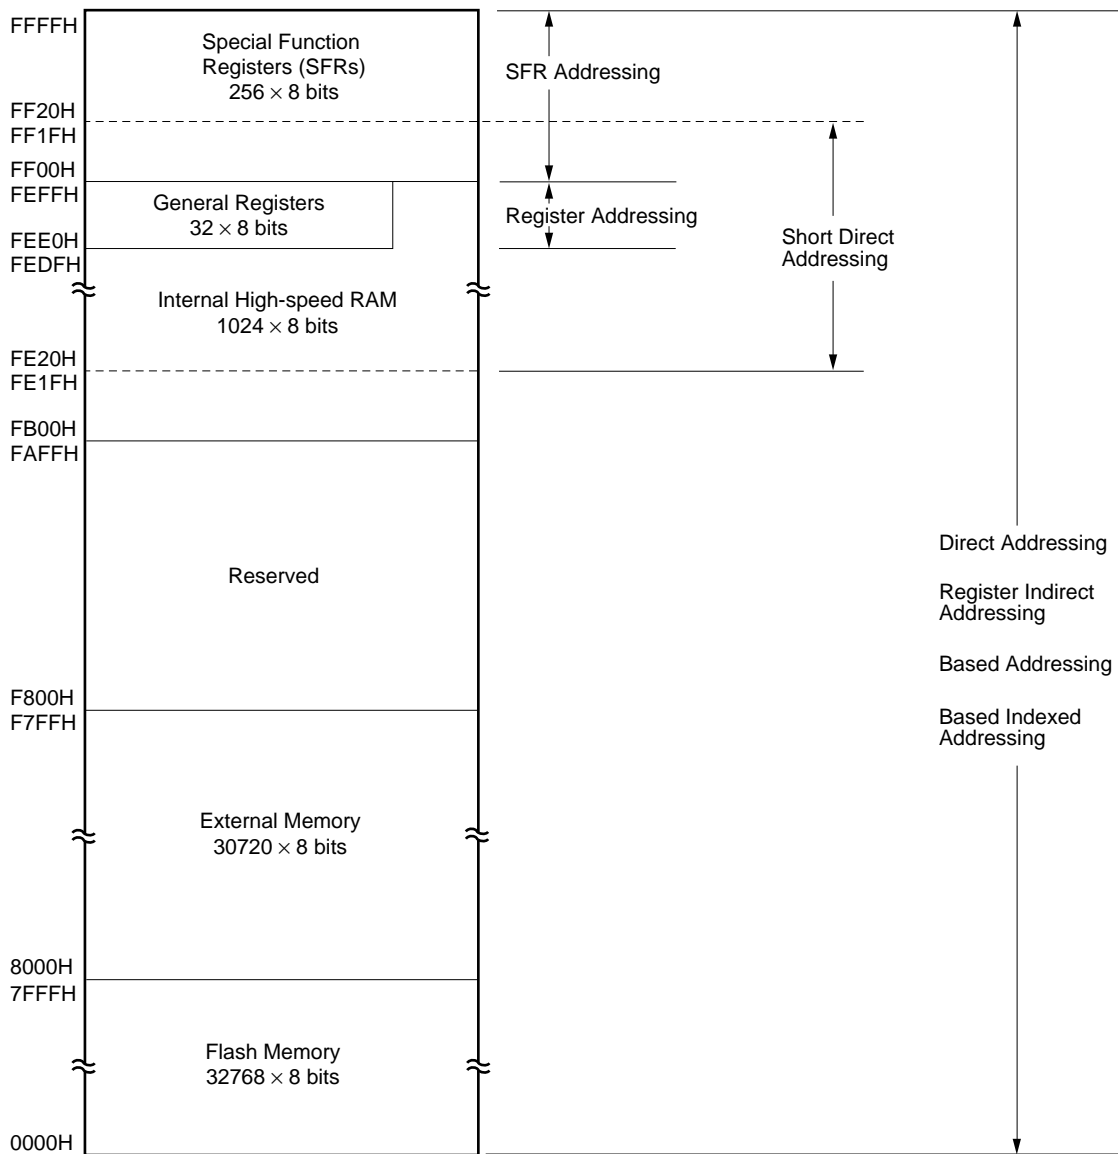

5.2 Processor Registers

The μ PD780024A, 780034A, 780024AY, 780034AY Subseries products incorporate the following processor registers.


5.2.1 Control registers

The control registers control the program sequence, statuses and stack memory. The control registers consist of a program counter (PC), a program status word (PSW) and a stack pointer (SP).

(1) Program counter (PC)

The program counter is a 16-bit register which holds the address information of the next program to be executed. In normal operation, the PC is automatically incremented according to the number of bytes of the instruction to be fetched. When a branch instruction is executed, immediate data and register contents are set. $\overline{\text{RESET}}$ input sets the reset vector table values at addresses 0000H and 0001H to the program counter.


Figure 5-11. Program Counter Format



(2) Program status word (PSW)

The program status word is an 8-bit register consisting of various flags to be set/reset by instruction execution. Program status word contents are automatically stacked upon interrupt request generation or PUSH PSW instruction execution and are automatically reset upon execution of the RETB, RETI and POP PSW instructions. $\overline{\text{RESET}}$ input sets the PSW to 02H.

Figure 5-12. Program Status Word Format



(a) Interrupt enable flag (IE)

This flag controls the interrupt request acknowledge operations of the CPU.

When 0, the IE is set to the disable interrupt (DI) state, and only non-maskable interrupt request becomes acknowledgeable. Other interrupt requests are all disabled.

When 1, the IE is set to the enable interrupt (EI) state and interrupt request acknowledge enable is controlled with an in-service priority flag (ISP), an interrupt mask flag for various interrupt sources and a priority specification flag.

The IE is reset to (0) upon DI instruction execution or interrupt acknowledgement and is set to (1) upon EI instruction execution.

(b) Zero flag (Z)

When the operation result is zero, this flag is set (1). It is reset (0) in all other cases.

(c) Register bank select flags (RBS0 and RBS1)

These are 2-bit flags to select one of the four register banks.

In these flags, the 2-bit information which indicates the register bank selected by SEL RBn instruction execution is stored.

(d) Auxiliary carry flag (AC)

If the operation result has a carry from bit 3 or a borrow at bit 3, this flag is set (1). It is reset (0) in all other cases.

(e) In-service priority flag (ISP)

This flag manages the priority of acknowledgeable maskable vectored interrupts. When this flag is 0, low-level vectored interrupts request specified with a priority specification flag register (PR0L, PR0H, PR1L) (refer to **19.3 (3) Priority specification flag registers (PR0L, PR0H, PR1L)**) are disabled for acknowledgement. When it is 1, all interrupts are acknowledgeable. Actual request acknowledgement is controlled with the interrupt enable flag (IE).

(f) Carry flag (CY)

This flag stores overflow and underflow upon add/subtract instruction execution. It stores the shift-out value upon rotate instruction execution and functions as a bit accumulator during bit manipulation instruction execution.


(3) Stack pointer (SP)

This is a 16-bit register to hold the start address of the memory stack area. Only the internal high-speed RAM area can be set as the stack area. The internal high-speed RAM areas of each product are as follows.

Table 5-4. Internal High-Speed RAM Area

Part Number	Internal High-Speed RAM Area
μ PD780021A, 780031A, 780021AY, 780031AY μ PD780022A, 780032A, 780022AY, 780032AY	FD00H to FEFFH
μ PD780023A, 780033A, 780023AY, 780033AY μ PD780024A, 780034A, 780024AY, 780034AY μ PD78F0034A, 78F0034AY	FB00H to FEFFH

Figure 5-13. Stack Pointer Format



The SP is decremented ahead of write (save) to the stack memory and is incremented after read (reset) from the stack memory.

Each stack operation saves/resets data as shown in Figures 5-14 and 5-15.

Caution Since RESET input makes SP contents undefined, be sure to initialize the SP before instruction execution.

Figure 5-14. Data To Be Saved to Stack Memory


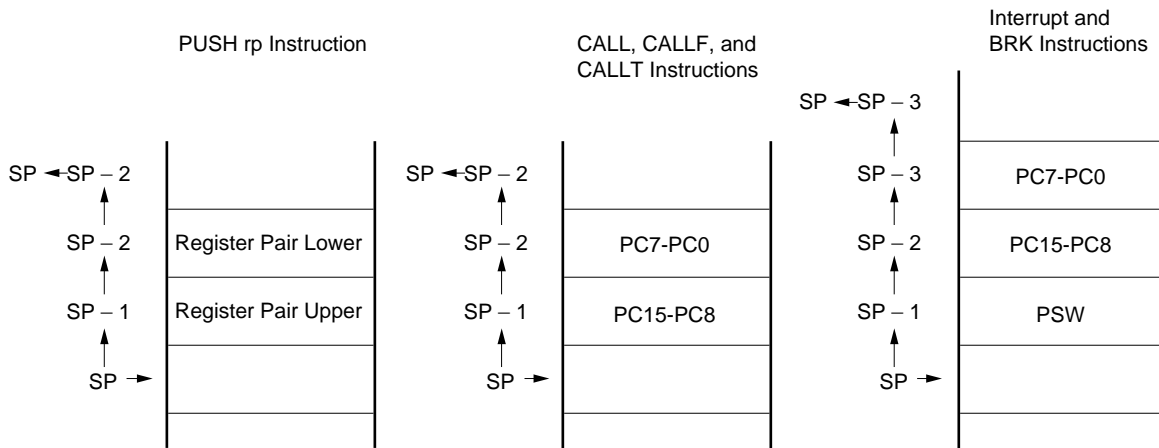


Figure 5-15. Data To Be Restored from Stack Memory

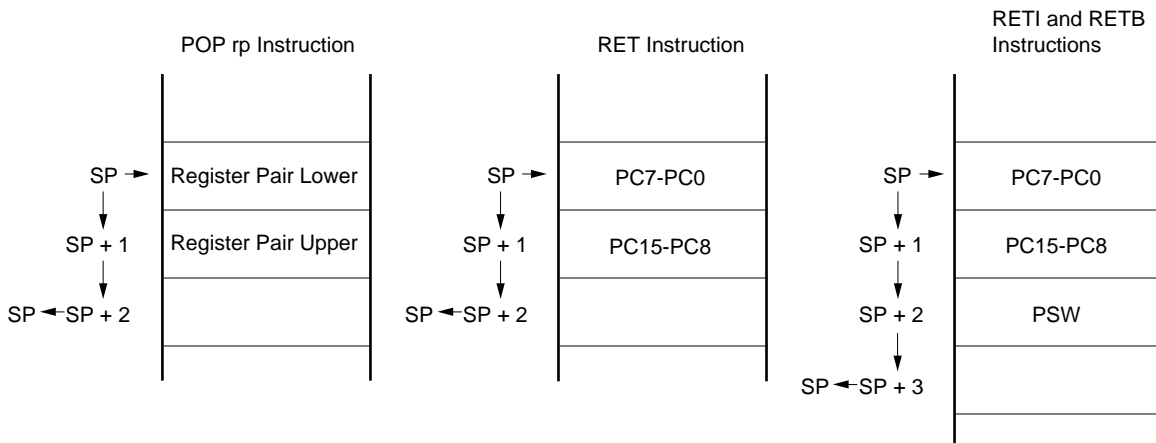

5.2.2 General registers


A general register is mapped at particular addresses (FEE0H to FEFFH) of the data memory. It consists of 4 banks, each bank consisting of eight 8-bit registers (X, A, C, B, E, D, L, and H).

Each register can also be used as an 8-bit register. Two 8-bit registers can be used in pairs as a 16-bit register (AX, BC, DE, and HL).

They can be described in terms of function names (X, A, C, B, E, D, L, H, AX, BC, DE, and HL) and absolute names (R0 to R7 and RP0 to RP3).

Register banks to be used for instruction execution are set with the CPU control instruction (SEL RBn). Because of the 4-register bank configuration, an efficient program can be created by switching between a register for normal processing and a register for interrupts for each bank.

Figure 5-16. General Register Configuration

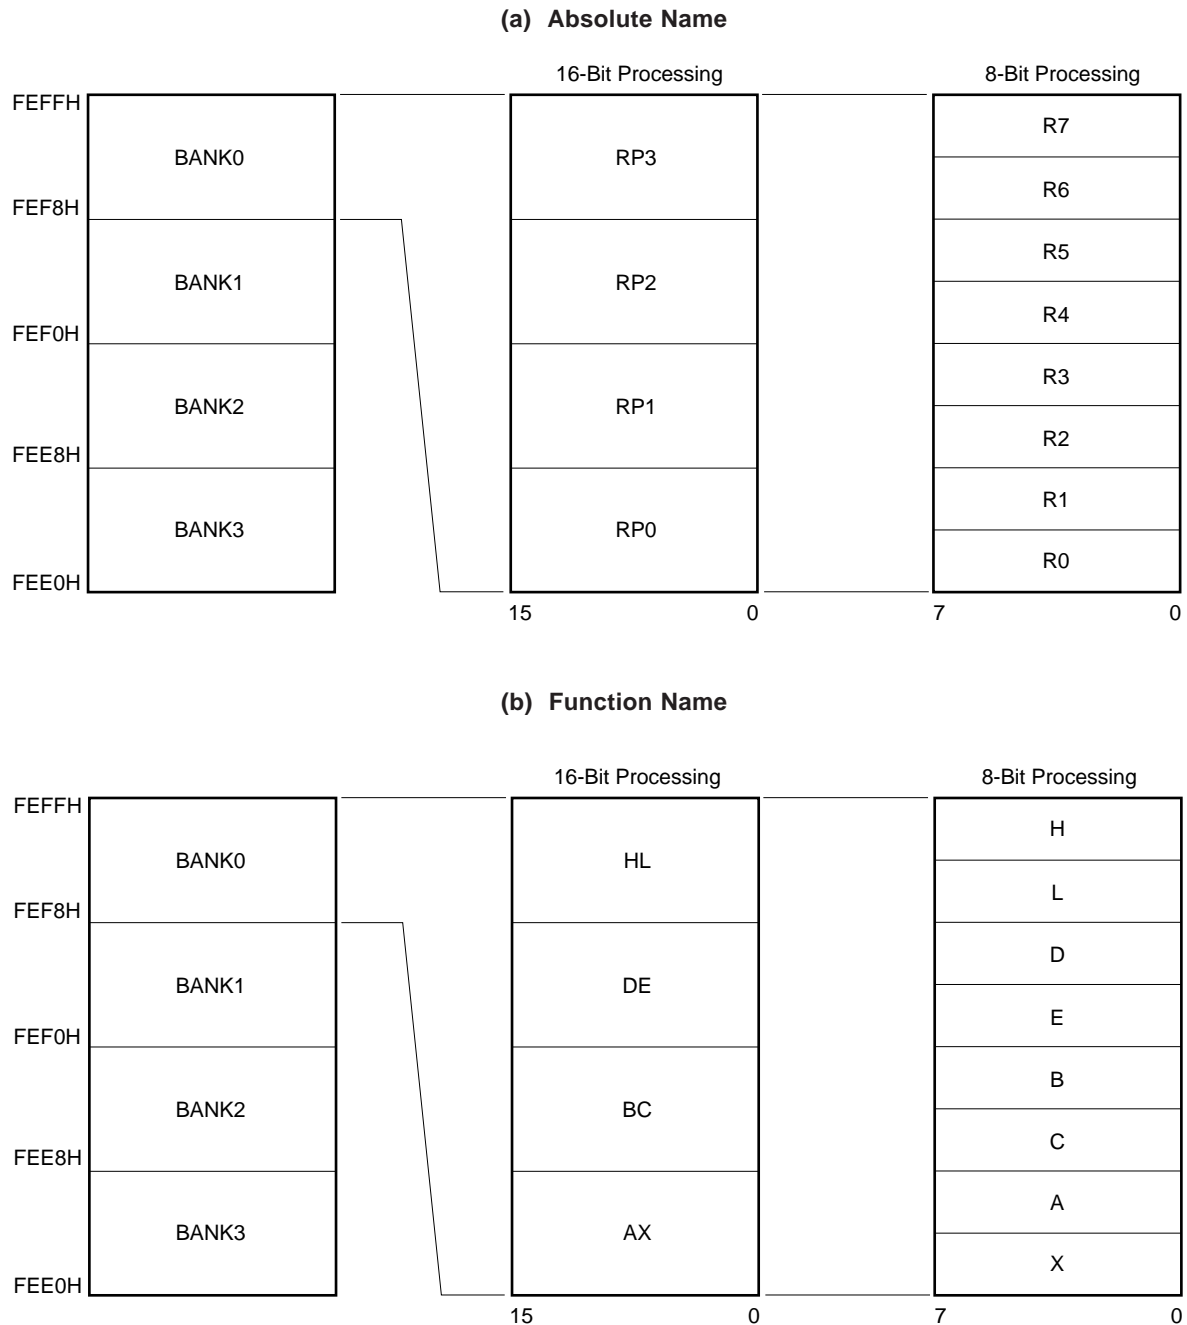

5.2.3 Special Function Register (SFR)

Unlike a general register, each special function register has special functions.

It is allocated in the FF00H to FFFFH area.

The special function register can be manipulated like the general register, with the operation, transfer and bit manipulation instructions. Manipulatable bit units, 1, 8, and 16, depend on the special function register type.

Each manipulation bit unit can be specified as follows.

- 1-bit manipulation
Describe the symbol reserved with assembler for the 1-bit manipulation instruction operand (sfr.bit).
This manipulation can also be specified with an address.
- 8-bit manipulation
Describe the symbol reserved with assembler for the 8-bit manipulation instruction operand (sfr).
This manipulation can also be specified with an address.
- 16-bit manipulation
Describe the symbol reserved with assembler for the 16-bit manipulation instruction operand (sfrp).
When addressing an address, describe an even address.

Table 5-5 gives a list of special function registers. The meaning of items in the table is as follows.

- Symbol
Symbol indicating the address of a special function register. It is a reserved word in the RA78K/0, and is defined via the header file "sfrbit.h" in the CC78K/0. When using the RA78K/0, ID78K0-NS, ID78K0, or SM78K0, symbols can be written as an instruction operand.
- R/W
Indicates whether the corresponding special function register can be read or written.
R/W : Read/write enable
R : Read only
W : Write only
- Manipulatable bit units
Indicates the manipulatable bit unit (1, 8, or 16). "-" indicates a bit unit for which manipulation is not possible.
- After reset
Indicates each register status upon $\overline{\text{RESET}}$ input.

Table 5-5. Special Function Register List (1/3)

Address	Special Function Register (SFR) Name	Symbol		R/W	Manipulatable Bit Unit			After Reset	
					1 bit	8 bits	16 bits		
FF00H	Port 0	P0		R/W	√	√	—	00H	
FF01H	Port 1	P1		R	√	√	—		
FF02H	Port 2	P2		R/W	√	√	—		
FF03H	Port 3	P3			√	√	—		
FF04H	Port 4	P4			√	√	—		
FF05H	Port 5	P5			√	√	—		
FF06H	Port 6	P6			√	√	—		
FF07H	Port 7	P7			√	√	—		
FF0AH	16-bit timer capture/compare register 00	CR00		R/W	—	—	√	Undefined	
FF0BH					—	—	√		
FF0CH	16-bit timer capture/compare register 01	CR01			—	—	√		
FF0DH					—	—	√		
FF0EH	16-bit timer/counter 0	TM0			R	—	—	√	0000H
FF0FH					—	—	√		
FF10H	8-bit timer compare register 50	CR50			R/W	—	√	—	Undefined
FF11H	8-bit timer compare register 51	CR51				—	√	—	
FF12H	8-bit timer/counter 50	TM5	TM50	R	—	√	√	00H	
FF13H	8-bit timer/counter 51		TM51		—	√	—		
FF16H	A/D conversion result register 0	ADCR0			—	—	√		Note 2
FF17H					—	√	Note 1		
FF18H	Transmit shift register 0	TXS0		W	—	√	—	FFH	
	Receive buffer register 0	RXB0		R	—	√	—		
FF1AH	Serial I/O shift register 30	SIO30		R/W	—	√	—	Undefined	
FF1BH	Serial I/O shift register 31 ^{Note 3}	SIO31			—	√	—		
FF1FH	IIC shift register 0 ^{Note 4}	IIC0			—	√	—		00H

- Notes**
1. μ PD780024A, 780024AY Subseries only
 2. μ PD780034A, 780034AY Subseries only, 16-bit access possible
 3. μ PD780024A, 780034A Subseries only
 4. μ PD780024AY, 780034AY Subseries only

Table 5-5. Special Function Register List (2/3)

Address	Special Function Register (SFR) Name	Symbol	R/W	Manipulatable Bit Unit			After Reset
				1 bit	8 bits	16 bits	
FF20H	Port mode register 0	PM0	R/W	√	√	—	FFH
FF22H	Port mode register 2	PM2		√	√	—	
FF23H	Port mode register 3	PM3		√	√	—	
FF24H	Port mode register 4	PM4		√	√	—	
FF25H	Port mode register 5	PM5		√	√	—	
FF26H	Port mode register 6	PM6		√	√	—	
FF27H	Port mode register 7	PM7		√	√	—	
FF30H	Pull-up resistor option register 0	PU0	R/W	√	√	—	00H
FF32H	Pull-up resistor option register 2	PU2		√	√	—	
FF33H	Pull-up resistor option register 3	PU3		√	√	—	
FF34H	Pull-up resistor option register 4	PU4		√	√	—	
FF35H	Pull-up resistor option register 5	PU5		√	√	—	
FF36H	Pull-up resistor option register 6	PU6		√	√	—	
FF37H	Pull-up resistor option register 7	PU7		√	√	—	
FF40H	Clock output selection register	CKS		√	√	—	
FF41H	Watch timer operation mode control register	WTM		√	√	—	
FF42H	Watchdog timer clock selection register	WDCS		—	√	—	
FF47H	Memory expansion mode register	MEM		√	√	—	
FF48H	External interrupt rising edge enable register	EGP		√	√	—	
FF49H	External interrupt falling edge enable register	EGN		√	√	—	
FF60H	16-bit timer mode control register 0	TMC0		√	√	—	
FF61H	Prescaler mode register 0	PRM0		—	√	—	
FF62H	Capture/compare control register 0	CRC0		√	√	—	
FF63H	16-bit timer output control register 0	TOC0		√	√	—	
FF70H	8-bit timer mode control register 50	TMC50		√	√	—	
FF71H	Timer clock selection register 50	TCL50		—	√	—	
FF78H	8-bit timer mode control register 51	TMC51		√	√	—	
FF79H	Timer clock selection register 51	TCL51		—	√	—	
FF80H	A/D converter mode register 0	ADM0		√	√	—	
FF81H	Analog input channel specification register 0	ADS0		—	√	—	
FFA0H	Asynchronous serial interface mode register 0	ASIM0	√	√	—		
FFA1H	Asynchronous serial interface status register 0	ASIS0	R	—	√	—	
FFA2H	Baud rate generator control register 0	BRGC0	R/W	—	√	—	

Table 5-5. Special Function Register List (3/3)

Address	Special Function Register (SFR) Name	Symbol		R/W	Manipulatable Bit Unit			After Reset
					1 bit	8 bits	16 bits	
FFA8H	IIC control register 0 ^{Note 1}	IICC0		R/W	√	√	—	00H
FFA9H	IIC status register 0 ^{Note 1}	IICS0		R	√	√	—	
FFAAH	IIC transfer clock selection register 0 ^{Note 1}	IICCL0		R/W	√	√	—	
FFABH	Slave address register 0 ^{Note 1}	SVA0			—	√	—	
FFB0H	Serial operation mode register 30	CSIM30			√	√	—	
FFB8H	Serial operation mode register 31 ^{Note 2}	CSIM31			√	√	—	
FFD0H to FFDFH	External access area ^{Note 3}				√	√	—	Undefined
FFE0H	Interrupt request flag register 0L	IF0	IF0L		√	√	√	00H
FFE1H	Interrupt request flag register 0H		IF0H		√	√		
FFE2H	Interrupt request flag register 1L	IF1L			√	√	—	
FFE4H	Interrupt mask flag register 0L	MK0	MK0L		√	√	√	FFH
FFE5H	Interrupt mask flag register 0H		MK0H		√	√		
FFE6H	Interrupt mask flag register 1L	MK1L			√	√	—	
FFE8H	Priority level specification flag register 0L	PR0	PR0L		√	√	√	
FFE9H	Priority level specification flag register 0H		PR0H		√	√		
FFEAH	Priority level specification flag register 1L	PR1L			√	√	—	
FFF0H	Memory size switching register	IMS			—	√	—	CFH ^{Note 4}
FFF8H	Memory expansion wait setting register	MM			√	√	—	10H
FFF9H	Watchdog timer mode register	WDTM			√	√	—	00H
FFFAH	Oscillation stabilization time selection register	OSTS			—	√	—	04H
FFFBH	Processor clock control register	PCC			√	√	—	

- Notes**
1. μ PD780024AY, 780034AY Subseries only
 2. μ PD780024A, 780034A Subseries only
 3. The external access area cannot be accessed by SFR addressing. Access it with the direct addressing method.
 4. The default is CFH, but set the value corresponding to each respective product as indicated below.
 μ PD780021A, 780031A, 780021AY, 780031AY: 42H
 μ PD780022A, 780032A, 780022AY, 780032AY: 44H
 μ PD780023A, 780033A, 780023AY, 780033AY: C6H
 μ PD780024A, 780034A, 780024AY, 780034AY: C8H
 μ PD78F0034A, 78F0034AY : Value for mask ROM version

5.3 Instruction Address Addressing

An instruction address is determined by program counter (PC) contents and is normally incremented (+1 for each byte) automatically according to the number of bytes of an instruction to be fetched each time another instruction is executed. When a branch instruction is executed, the branch destination information is set to the PC and branched by the following addressing. (For details of instructions, refer to **78K/0 User's Manual – Instructions (U12326E)**).


5.3.1 Relative addressing

[Function]

The value obtained by adding 8-bit immediate data (displacement value: *jdisp8*) of an instruction code to the start address of the following instruction is transferred to the program counter (PC) and branched. The displacement value is treated as signed two's complement data (–128 to +127) and bit 7 becomes a sign bit. In other words, relative addressing consists in relative branching from the start address of the following instruction to the –128 to +127 range.

This function is carried out when the BR \$addr16 instruction or a conditional branch instruction is executed.

[Illustration]

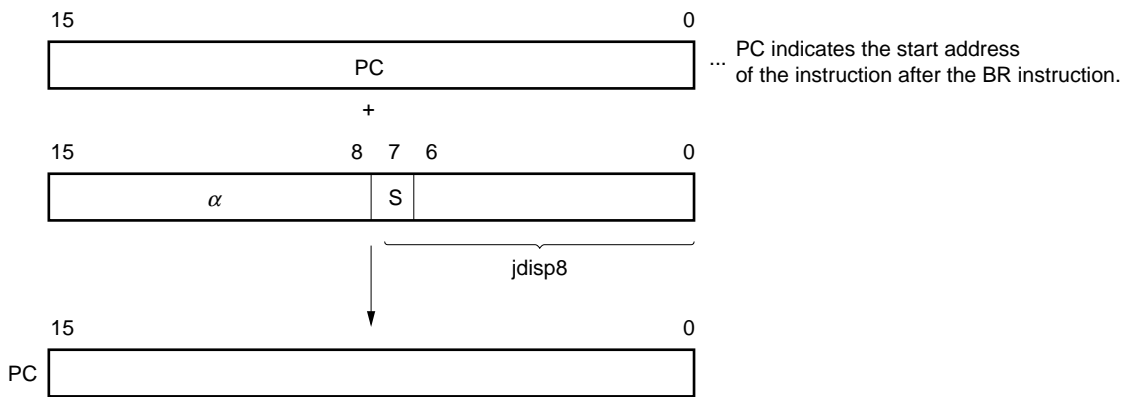

When S = 0, all bits of *α* are 0.
 When S = 1, all bits of *α* are 1.


5.3.2 Immediate addressing

[Function]


Immediate data in the instruction word is transferred to the program counter (PC) and branched. This function is carried out when the CALL !addr16 or BR !addr16 or CALLF !addr11 instruction is executed. CALL !addr16 and BR !addr16 instructions can be branched to the entire memory space. The CALLF !addr11 instruction is branched to the 0800H to 0FFFH area.

[Illustration]

In the case of CALL !addr16 and BR !addr16 instructions

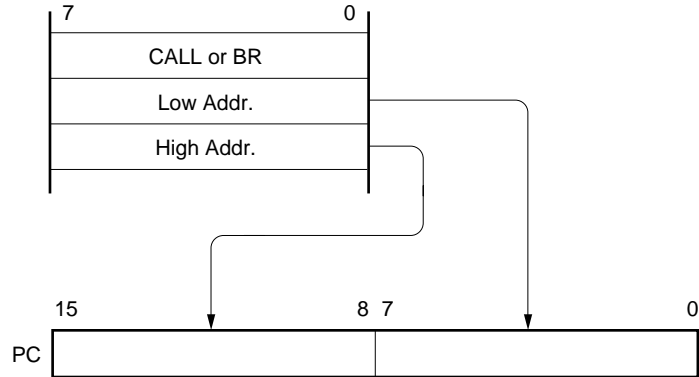

In the case of CALLF !addr11 instruction

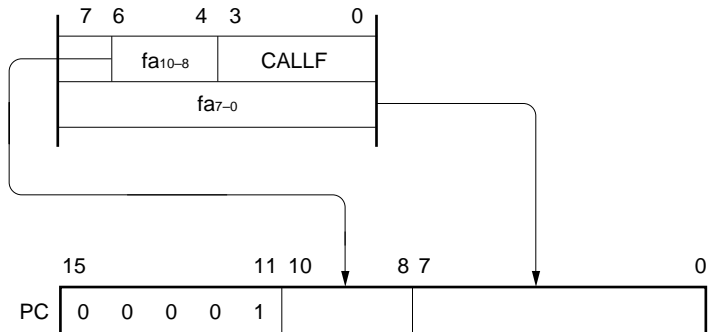

5.3.3 Table indirect addressing


[Function]

Table contents (branch destination address) of the particular location to be addressed by bits 1 to 5 of the immediate data of an operation code are transferred to the program counter (PC) and branched.

This function is carried out when the CALLT [addr5] instruction is executed.

This instruction references the address stored in the memory table from 40H to 7FH, and allows branching to the entire memory space.

[Illustration]

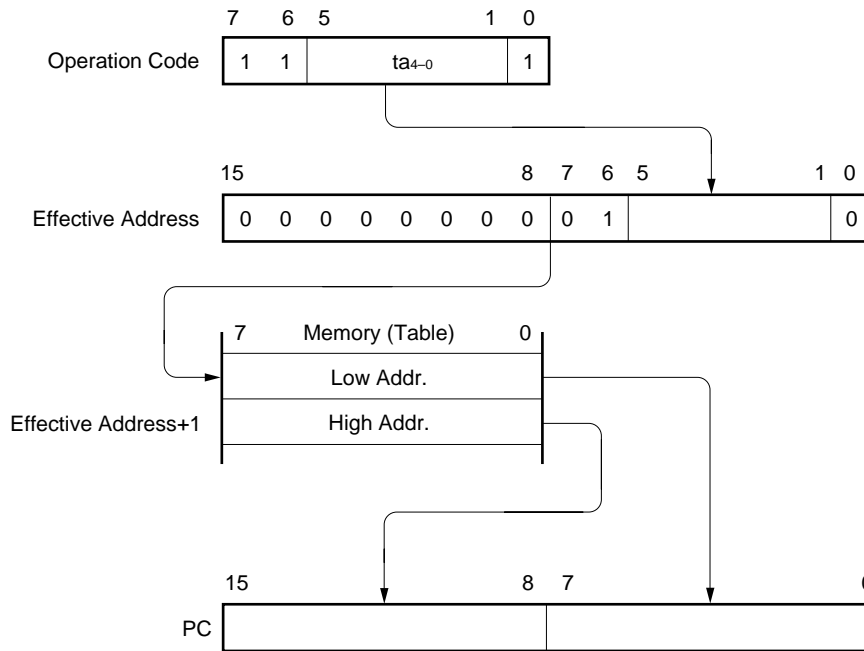


5.3.4 Register addressing

[Function]

Register pair (AX) contents to be specified with an instruction word are transferred to the program counter (PC) and branched.

This function is carried out when the BR AX instruction is executed.

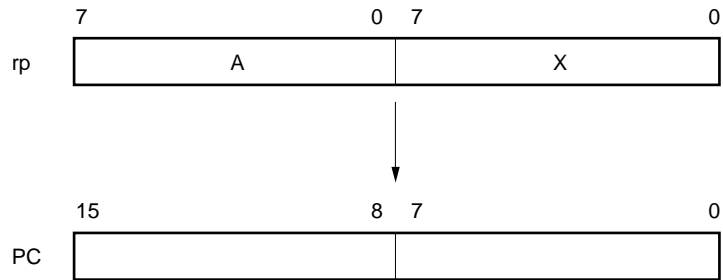[Illustration]

5.4 Operand Address Addressing

The following various methods are available to specify the register and memory (addressing) which undergo manipulation during instruction execution.

5.4.1 Implied addressing

[Function]

The register which functions as an accumulator (A and AX) in the general register is automatically (implicitly) addressed.

Of the μ PD780024A, 780034A, 780024AY, 780034AY Subseries instruction words, the following instructions employ implied addressing.

Instruction	Register To Be Specified by Implied Addressing
MULU	A register for multiplicand and AX register for product storage
DIVUW	AX register for dividend and quotient storage
ADJBA/ADJBS	A register for storage of numeric values which become decimal correction targets
ROR4/ROL4	A register for storage of digit data which undergoes digit rotation

[Operand format]

Because implied addressing can be automatically employed with an instruction, no particular operand format is necessary.

[Description example]

In the case of MULU X

With an 8-bit \times 8-bit multiply instruction, the product of A register and X register is stored in AX. In this example, the A and AX registers are specified by implied addressing.

5.4.2 Register addressing

[Function]

The general register to be specified is accessed as an operand with the register specify code (Rn and RPn) of an instruction word in the registered bank specified with the register bank select flag (RBS0 to RBS1).

Register addressing is carried out when an instruction with the following operand format is executed. When an 8-bit register is specified, one of the eight registers is specified with 3 bits in the operation code.


[Operand format]

Identifier	Description
r	X, A, C, B, E, D, L, H
rp	AX, BC, DE, HL


'r' and 'rp' can be described with absolute names (R0 to R7 and RP0 to RP3) as well as function names (X, A, C, B, E, D, L, H, AX, BC, DE, and HL).

[Description example]

MOV A, C; when selecting C register as r



INCW DE; when selecting DE register pair as rp



5.4.3 Direct addressing

[Function]


The memory to be manipulated is addressed with immediate data in an instruction word becoming an operand address.

[Operand format]


Identifier	Description
addr16	Label or 16-bit immediate data

[Description example]

MOV A, !0FE00H; when setting !addr16 to FE00H

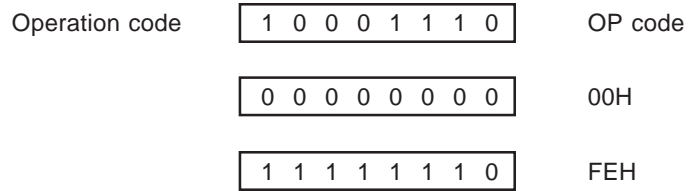

[Illustration]

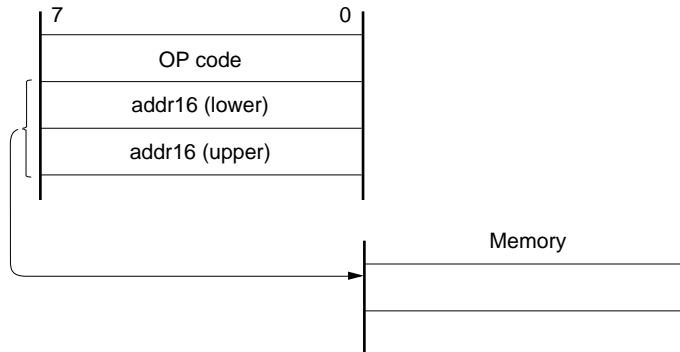

5.4.4 Short direct addressing

[Function]

The memory to be manipulated in the fixed space is directly addressed with 8-bit data in an instruction word. This addressing is applied to the 256-byte space FE20H to FF1FH. An internal RAM and a special function register (SFR) are mapped at FE20H to FEFFH and FF00H to FF1FH, respectively.

If the SFR area (FF00H to FF1FH) where short direct addressing is applied, ports which are frequently accessed in a program and a compare register of the timer/event counter and a capture register of the timer/event counter are mapped and these SFRs can be manipulated with a small number of bytes and clocks.

When 8-bit immediate data is at 20H to FFH, bit 8 of an effective address is set to 0. When it is at 00H to 1FH, bit 8 is set to 1. Refer to the **[Illustration]** on the next page.

[Operand format]


Identifier	Description
saddr	Label of FE20H to FF1FH immediate data
saddrp	Label of FE20H to FF1FH immediate data (even address only)

[Description example]

MOV 0FE30H, #50H; when setting saddr to FE30H and immediate data to 50H

Operation code	0 0 0 1 0 0 0 1	OP code
	0 0 1 1 0 0 0 0	30H (saddr-offset)
	0 1 0 1 0 0 0 0	50H (immediate data)

[Illustration]

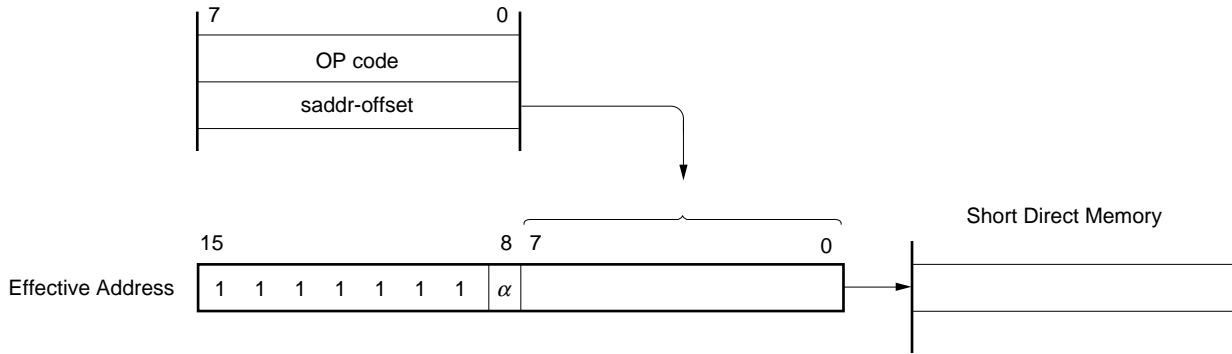

When 8-bit immediate data is 20H to FFH, $\alpha = 0$

When 8-bit immediate data is 00H to 1FH, $\alpha = 1$

5.4.5 Special function register (SFR) addressing

[Function]

The memory-mapped special function register (SFR) is addressed with 8-bit immediate data in an instruction word.


This addressing is applied to the 240-byte spaces FF00H to FFCFH and FFE0H to FFFFH. However, the SFR mapped at FF00H to FF1FH can be accessed with short direct addressing.

[Operand format]


Identifier	Description
sfr	Special function register name
sfrp	16-bit manipulatable special function register name (even address only)

[Description example]

MOV PM0, A; when selecting PM0 (FF20H) as sfr



[Illustration]

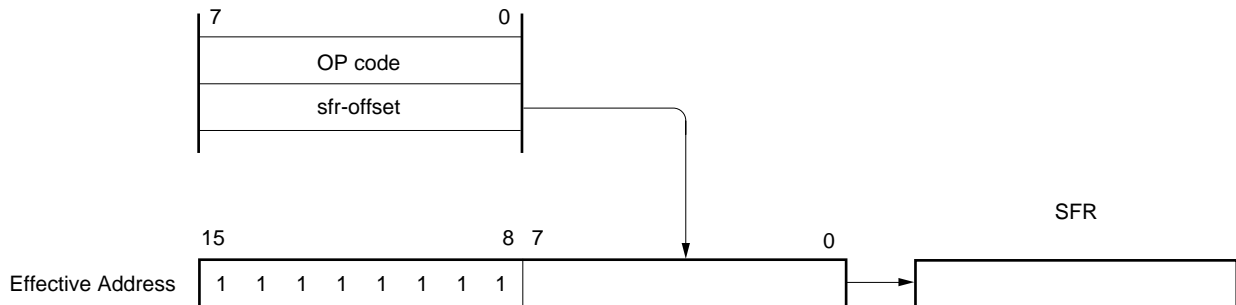

5.4.6 Register indirect addressing

[Function]

Register pair contents specified with a register pair specify code in an instruction word of the register bank specified with a register bank select flag (RBS0 and RBS1) serve as an operand address for addressing the memory to be manipulated. This addressing can be carried out for all the memory spaces.

[Operand format]


Identifier	Description
—	[DE], [HL]

[Description example]

MOV A, [DE]; when selecting [DE] as register pair

Operation code 1 0 0 0 0 1 0 1

[Illustration]

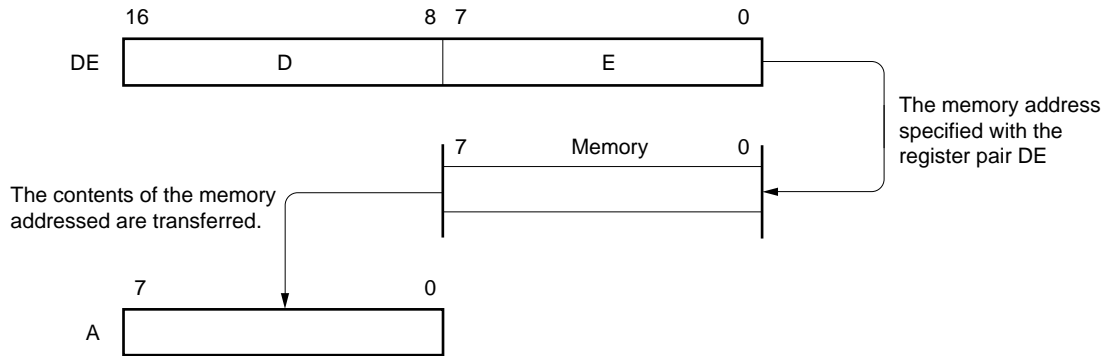

5.4.7 Based addressing

[Function]

8-bit immediate data is added as offset data to the contents of the base register, that is, the HL register pair in an instruction word of the register bank specified with the register bank select flag (RBS0 and RBS1) and the sum is used to address the memory. Addition is performed by expanding the offset data as a positive number to 16 bits. A carry from the 16th bit is ignored. This addressing can be carried out for all the memory spaces.

[Operand format]

Identifier	Description
—	[HL + byte]

[Description example]

MOV A, [HL + 10H]; when setting byte to 10H

Operation code

1	0	1	0	1	1	1	0
---	---	---	---	---	---	---	---

0	0	0	1	0	0	0	0
---	---	---	---	---	---	---	---

5.4.8 Based indexed addressing

[Function]

The B or C register contents specified in an instruction are added to the contents of the base register, that is, the HL register pair in an instruction word of the register bank specified with the register bank select flag (RBS0 and RBS1) and the sum is used to address the memory.

Addition is performed by expanding the offset data as a positive number to 16 bits. A carry from the 16th bit is ignored. This addressing can be carried out for all the memory spaces.

[Operand format]

Identifier	Description
—	[HL + B], [HL + C]

[Description example]

In the case of MOV A, [HL + B]

Operation code 1 0 1 0 1 0 1 1

5.4.9 Stack addressing

[Function]

The stack area is indirectly addressed with the stack pointer (SP) contents.

This addressing method is automatically employed when the PUSH, POP, subroutine call and return instructions are executed or the register is saved/reset upon generation of an interrupt request.

Stack addressing enables to address the internal high-speed RAM area only.

[Description example]

In the case of PUSH DE

Operation code 1 0 1 1 0 1 0 1

CHAPTER 6 PORT FUNCTIONS

6.1 Port Functions

The μ PD780024A, 780034A, 780024AY, and 780034AY Subseries products incorporate eight input ports and 43 input/output ports. Figure 6-1 shows the port configuration. Every port is capable of 1-bit and 8-bit manipulations and can carry out considerably varied control operations. Besides port functions, the ports can also serve as on-chip hardware input/output pins.

Figure 6-1. Port Types

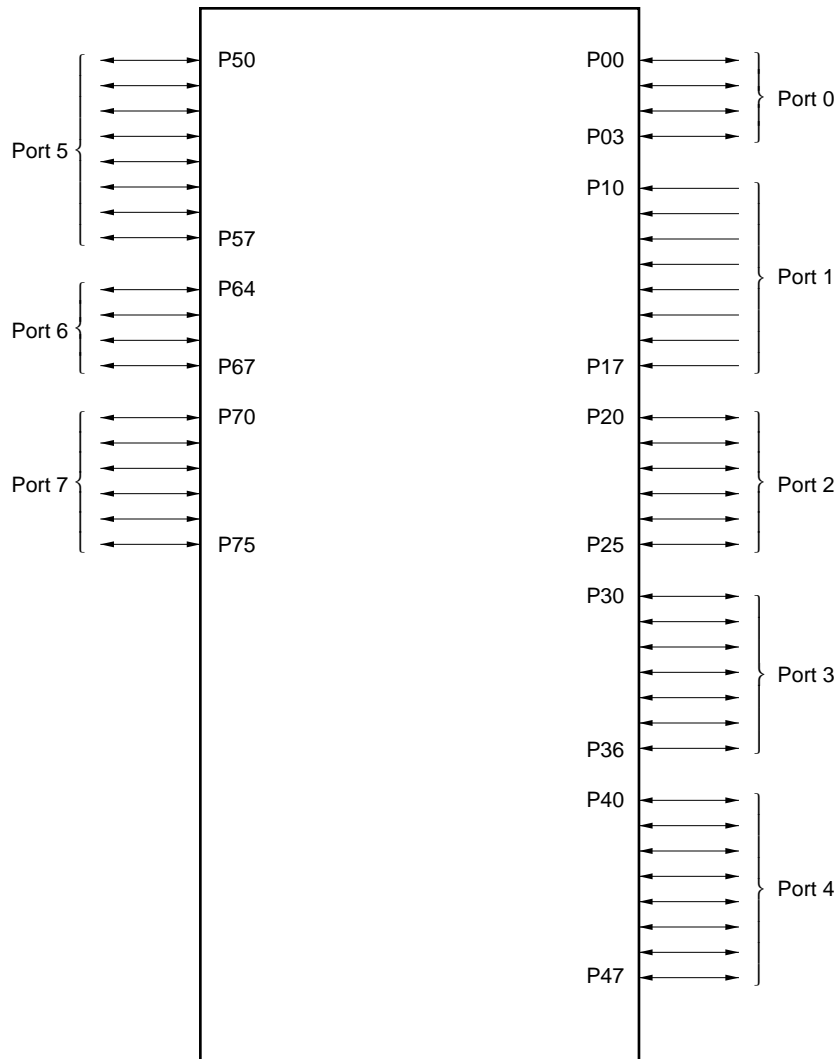


Table 6-1. Port Functions (μ PD780024A, 780034A Subseries)

Pin Name	Function		Alternate Function
P00	Port 0		INTP0
P01	4-bit input/output port.		INTP1
P02	Input/output mode can be specified bit-wise.		INTP2
P03	An on-chip pull-up resistor can be used by software.		INTP3/ADTRG
P10 to P17	Port 1 8-bit input only port.		ANI0 to ANI7
P20	Port 2		SI30
P21	6-bit input/output port.		SO30
P22	Input/output mode can be specified bit-wise.		$\overline{\text{SCK30}}$
P23	An on-chip pull-up resistor can be used by software.		RxD0
P24			TxD0
P25			ASCK0
P30	Port 3	N-ch open-drain input/output port. On-chip pull-up resistor can be specified by mask option (Mask ROM version only). LEDs can be driven directly.	—
P31	7-bit input/output port.		
P32	Input/output mode can be specified	An on-chip pull-up resistor can be specified by software.	SI31
P33	bit-wise.		SO31
P34			$\overline{\text{SCK31}}$
P35			
P36			
P40 to P47	Port 4 8-bit input/output port. Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be specified by software. Interrupt request flag (KRIF) is set to 1 by falling edge detection.		AD0 to AD7
P50 to P57	Port 5 8-bit input/output port. LEDs can be driven directly. Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		A8 to A15
P64	Port 6		$\overline{\text{RD}}$
P65	4-bit input/output port.		$\overline{\text{WR}}$
P66	Input/output mode can be specified bit-wise.		$\overline{\text{WAIT}}$
P67	An on-chip pull-up resistor can be used by software.		ASTB
P70	Port 7		TI00/TO0
P71	6-bit input/output port.		TI01
P72	Input/output mode can be specified bit-wise.		TI50/TO50
P73	An on-chip pull-up resistor can be used by software.		TI51/TO51
P74			PCL
P75			BUZ

Table 6-2. Port Functions (μ PD780024AY, 780034AY Subseries)

Pin Name	Function		Alternate Function
P00	Port 0		INTP0
P01	4-bit input/output port.		INTP1
P02	Input/output mode can be specified bit-wise.		INTP2
OP3	An on-chip pull-up resistor can be used by software.		INTP3/ADTRG
P10 to P17	Port 1 8-bit input only port.		ANI0 to ANI7
P20	Port 2		SI30
P21	6-bit input/output port		SO30
P22	Input/output mode can be specified bit-wise.		$\overline{\text{SCK30}}$
P23	An on-chip pull-up resistor can be used by software.		RxD0
P24			TxD0
P25			ASCK0
P30	Port 3	N-ch open-drain input/output port. On-chip pull-up resistor can be specified by mask option (P30 and P31 are Mask ROM version only). LEDs can be driven directly.	—
P31	7-bit input/output port.		
P32	Input/output mode can be specified bit-wise.		SDA0
P33			SCL0
P34		An on-chip pull-up resistor can be used by software.	—
P35			
P36			
P40 to P47	Port 4 8-bit input/output port. Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software. Interrupt request flag (KRIF) is set to 1 by falling edge detection.		AD0 to AD7
P50 to P57	Port 5 8-bit input/output port. LEDs can be driven directly. Input/output mode can be specified bit-wise. An on-chip pull-up resistor can be used by software.		A8 to A15
P64	Port 6		$\overline{\text{RD}}$
P65	4-bit input/output port.		$\overline{\text{WR}}$
P66	Input/output mode can be specified bit-wise.		$\overline{\text{WAIT}}$
P67	An on-chip pull-up resistor can be used by software.		ASTB
P70	Port 7		TI00/TO0
P71	6-bit input/output port.		TI01
P72	Input/output mode can be specified bit-wise.		TI50/TO50
P73	An on-chip pull-up resistor can be connected by software.		TI51/TO51
P74			PCL
P75			BUZ

6.2 Port Configuration

A port consists of the following hardware:

Table 6-3. Port Configuration

Item	Configuration
Control register	Port mode register (PMm: m = 0, 2 to 7) Pull-up resistor option register (PUM, m = 0, 2 to 7)
Port	Total: 51 ports (8 inputs, 43 inputs/outputs)
Pull-up resistor	<ul style="list-style-type: none"> • Mask ROM version Total: 43 (software specifiable: 39, mask option: 4^{Note}) • Flash memory version Total: 39

Note Two mask options for the μ PD780024AY and 780034AY subseries.

6.2.1 Port 0

Port 0 is a 4-bit input/output port with output latch. P00 to P03 pins can specify the input mode/output mode in 1-bit units with the port mode register 0 (PM0). An on-chip pull-up resistor of P00 to P03 pins can be used to them in 6-bit units with a pull-up resistor option register 0 (PU0).


This port can also be used as an external interrupt request input, and A/D converter external trigger input.

$\overline{\text{RESET}}$ input sets port 0 to input mode.

Figure 6-2 shows a block diagram of port 0.

Caution Because port 0 also serves for external interrupt request input, when the port function output mode is specified and the output level is changed, the interrupt request flag is set. Thus, when the output mode is used, set the interrupt mask flag to 1.

Figure 6-2. P00 to P03 Block Diagram

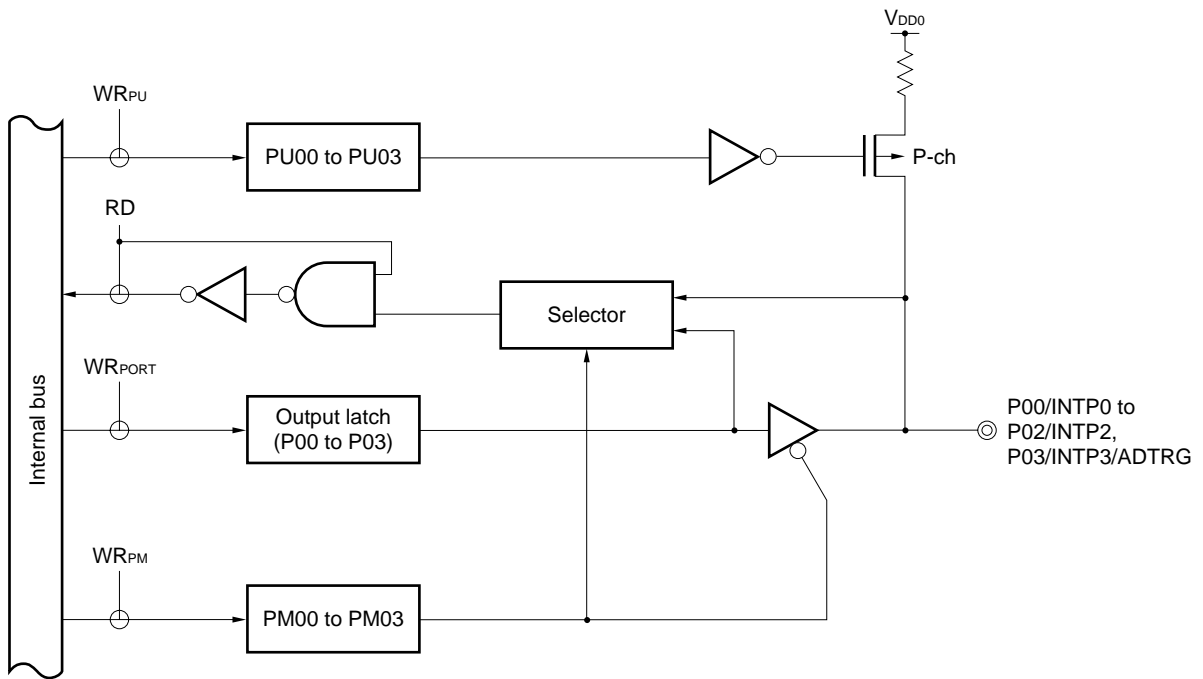


PU : Pull-up resistor option register
 PM : Port mode register
 RD : Port 0 read signal
 WR : Port 0 write signal

6.2.2 Port 1

Port 1 is an 8-bit input-only port.
 This port can also be used as an A/D converter analog input.
 Figure 6-3 shows a block diagram of port 1.

Figure 6-3. P10 to P17 Block Diagram

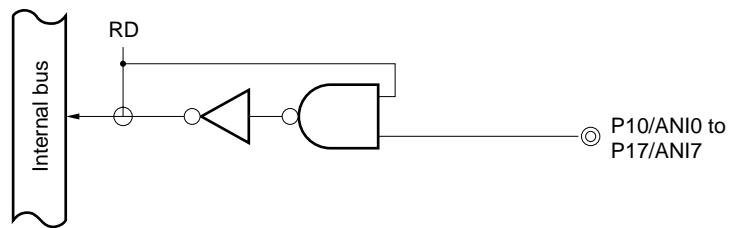

RD : Port 1 read signal

6.2.3 Port 2


Port 2 is a 6-bit input/output port with output latch. P20 to P25 pins can specify the input mode/output mode in 1-bit units with the port mode register 2 (PM2). An on-chip pull-up resistor of P20 to P25 pins can be used for them in 1-bit units with a pull-up resistor option register 2 (PU2).

This port has also alternate functions as serial interface data input/output and clock input/output.

$\overline{\text{RESET}}$ input sets port 2 to input mode.

Figure 6-4 shows a block diagram of port 2.

Figure 6-4. P20 to P25 Block Diagram

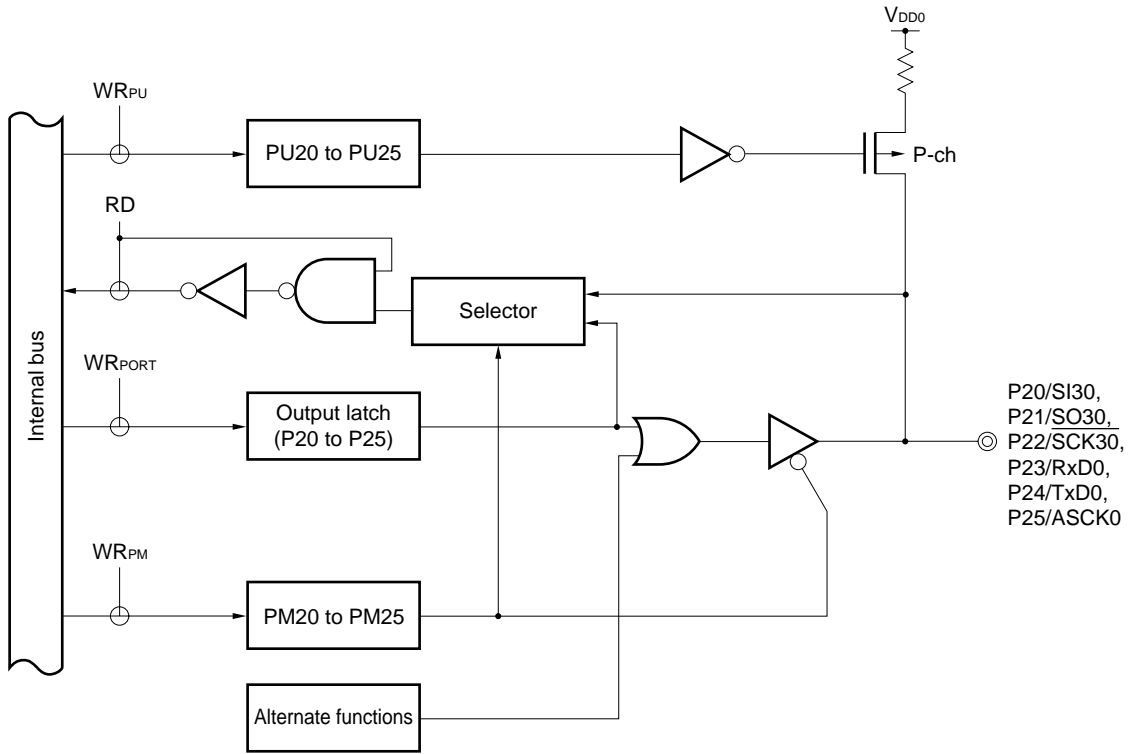

- PU : Pull-up resistor option register
- PM : Port mode register
- RD : Port 2 read signal
- WR : Port 2 write signal

6.2.4 Port 3 (μ PD780024A, 780034A Subseries)

Port 2 is a 7-bit input/output port with output latch. P30 to P36 pins can specify the input mode/output mode in 1-bit units with port mode register 3 (PM3).

This port has the following functions for pull-up resistors. These functions differ depending on the board's high-order 36-bit/low-order 4-bit, and whether the products is a Mask ROM version or a flash memory version.

Table 6-4. Pull-Up Resistor of Port 3 (μ PD780024A, 780034A Subseries)

	High-Order 3-Bit (P34 to P36 pins)	Low-Order 4-Bit (P30 to P33 pins)
Mask ROM version	An on-chip pull-up resistor can be used bit-wise by PU3	On-chip pull-up resistor can be specified bit-wise by mask option
Flash memory version		On-chip pull-up resistor is not provided

PU3: Pull-up resistor option register 3


The P30 to P33 pins can drive LEDs directly.

The P34 to P36 pins can also be used for serial interface data input/output and clock input/output.


$\overline{\text{RESET}}$ input sets port 3 to input mode.

Figures 6-5 and 6-6 show block diagrams of port 3.

Figure 6-5. P30 to P33 Block Diagram (μ PD780024A, 780034A Subseries)

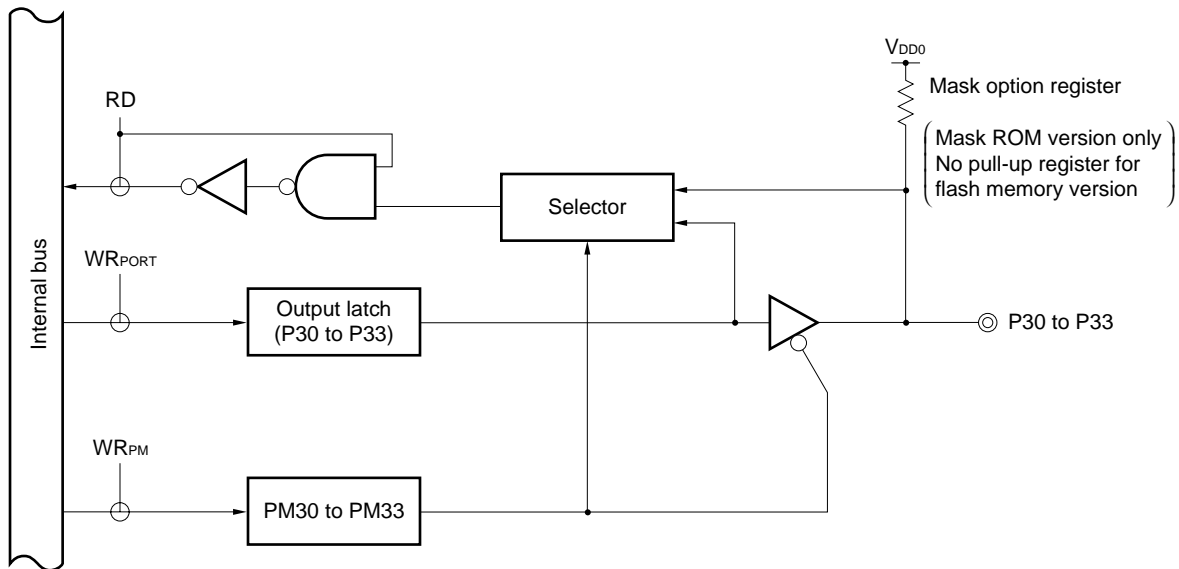

- PM : Port mode register
- RD : Port 3 read signal
- WR : Port 3 write signal

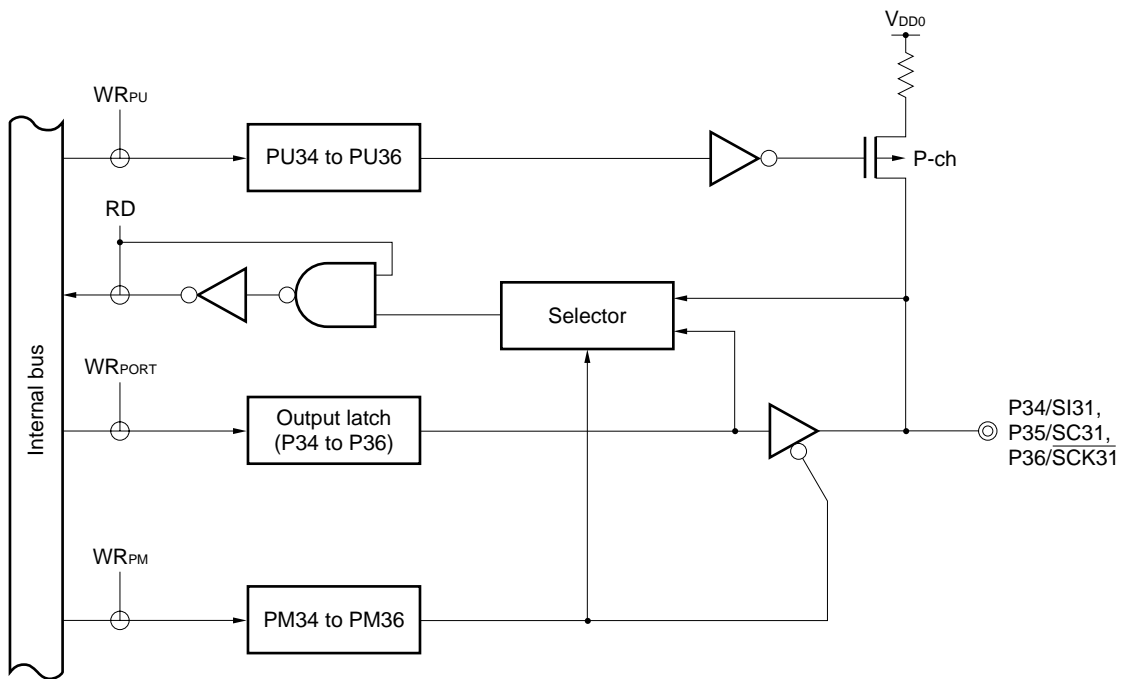Figure 6-6. P34 to P36 Block Diagram (μ PD780024A, 780034A Subseries)

PU : Pull-up resistor option register

PM : Port mode register

RD : Port 3 read signal

WR : Port 3 write signal

6.2.5 Port 3 (μ PD780024AY, 780034AY Subseries)

Port 3 is a 7-bit input/output port with output latch. P30 to P36 pins can specify the input mode/output mode in 1-bit units with port mode register 3 (PM3).

This port has the following functions for pull-up resistors.

These functions differ depending on bits location and mask ROM version/flash memory version.

Table 6-5. Pull-Up Resistor of Port 3 (μ PD780024AY, 780034AY Subseries)

	P34 to P36 Pins	P30, P31 Pins
Mask ROM version	A pull-up resistor can be connected bit-wise by PU3	On-chip pull-up resistor can be specified bit-wise by mask option
Flash memory version		On-chip pull-up resistor is not be specified

PU3: Pull-up resistor option register 3

Caution P32 and P33 pins have no pull-up resistor.


The P30 to P33 pins can drive LEDs directly.

The P32 and P33 pins can also be used for interface data input/output and clock input/output.

$\overline{\text{RESET}}$ input sets port 3 to input mode.


Figures 6-7 through 6-9 show block diagrams of port 3.

Figure 6-7. P30 and P31 Block Diagram (μ PD780024AY, 780034AY Subseries)

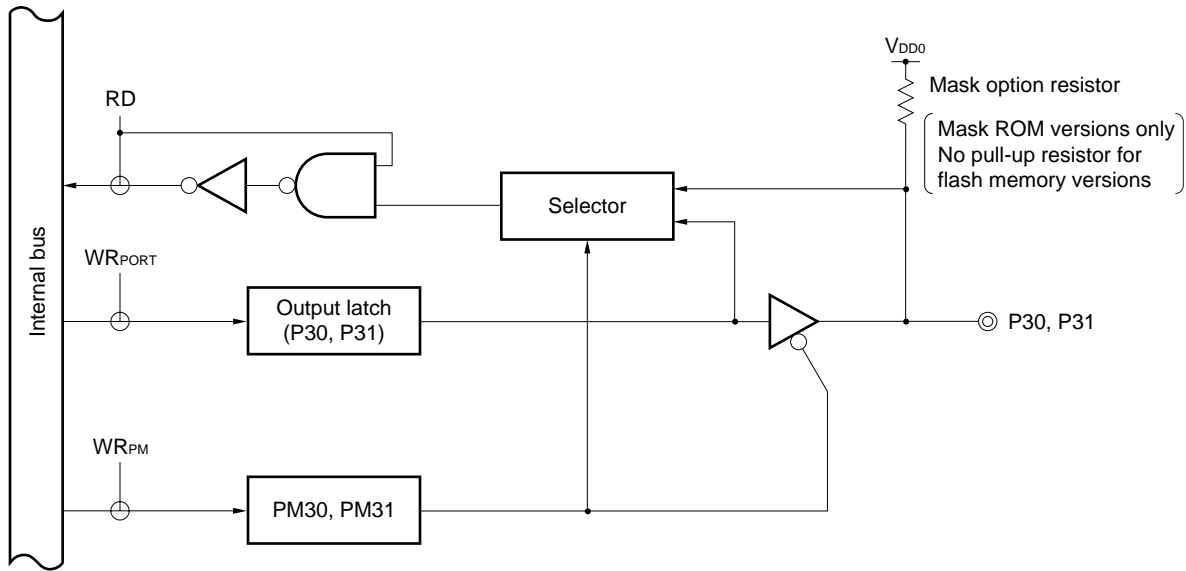


PM : Port mode register
 RD : Port 3 read signal
 WR : Port 3 write signal

Figure 6-8. P32 and P33 Block Diagram (μ PD780024AY, 780034AY Subseries)

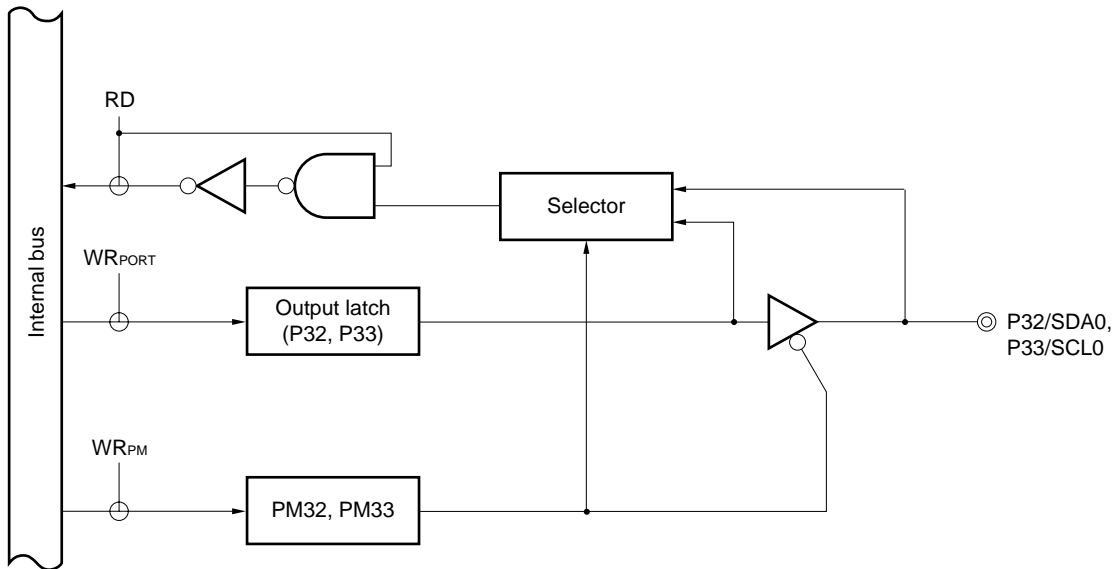

PM : Port mode register
 RD : Port 3 read signal
 WR : Port 3 write signal

Figure 6-9. P34 to P36 Block Diagram (μ PD780024AY, 780034AY Subseries)

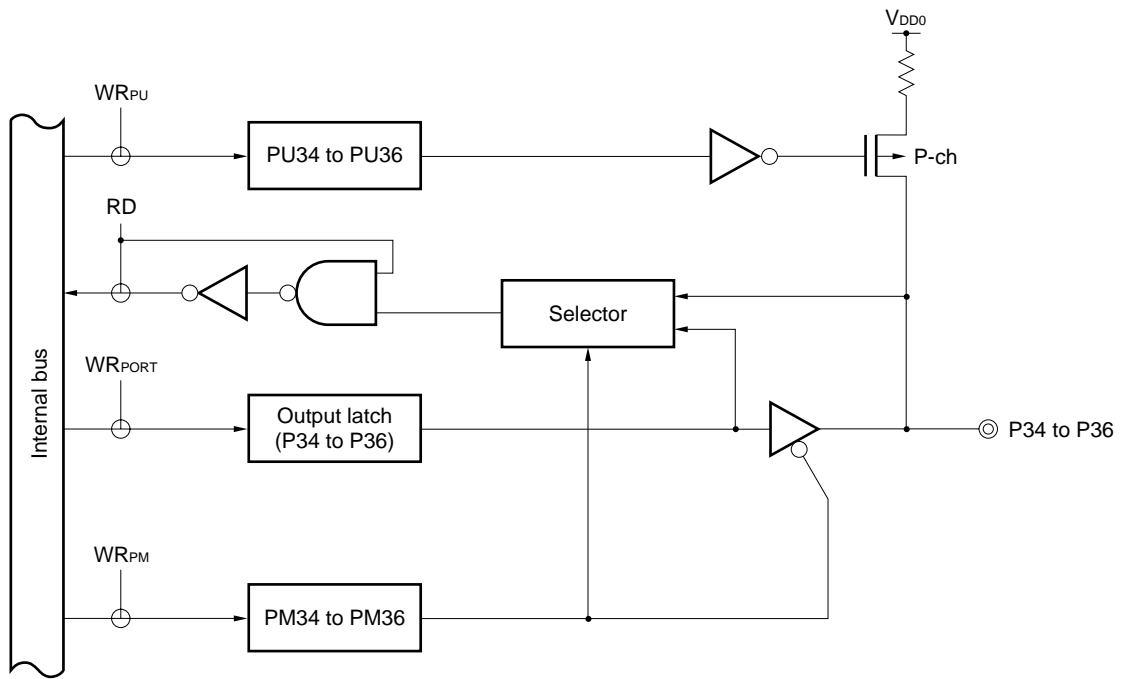

- PU : Pull-up resistor option register
- PM : Port mode register
- RD : Port 6 read signal
- WR : Port 6 write signal

6.2.6 Port 4

Port 4 is an 8-bit input/output port with output latch. The P40 to P47 pins can specify the input mode/output mode in 1-bit units with port mode register 4 (PM4). When the P40 to P47 pins are used as input ports, a pull-up resistor can be connected to them in 1-bit units with pull-up resistor option register 4 (PU4).

The interrupt request flag (KRIF) can be set to 1 by detecting falling edges.


This port can also be used as an address/data bus in external memory expansion mode.

$\overline{\text{RESET}}$ input sets port 4 to input mode.

Figures 6-10 and 6-11 show a block diagram of port 4 and block diagram of the falling edge detection circuit, respectively.


Caution When using the falling edge detection interrupt (INTKR), be sure to set the memory expansion mode register (MEM) to 01H.

Figure 6-10. P40 to P47 Block Diagram

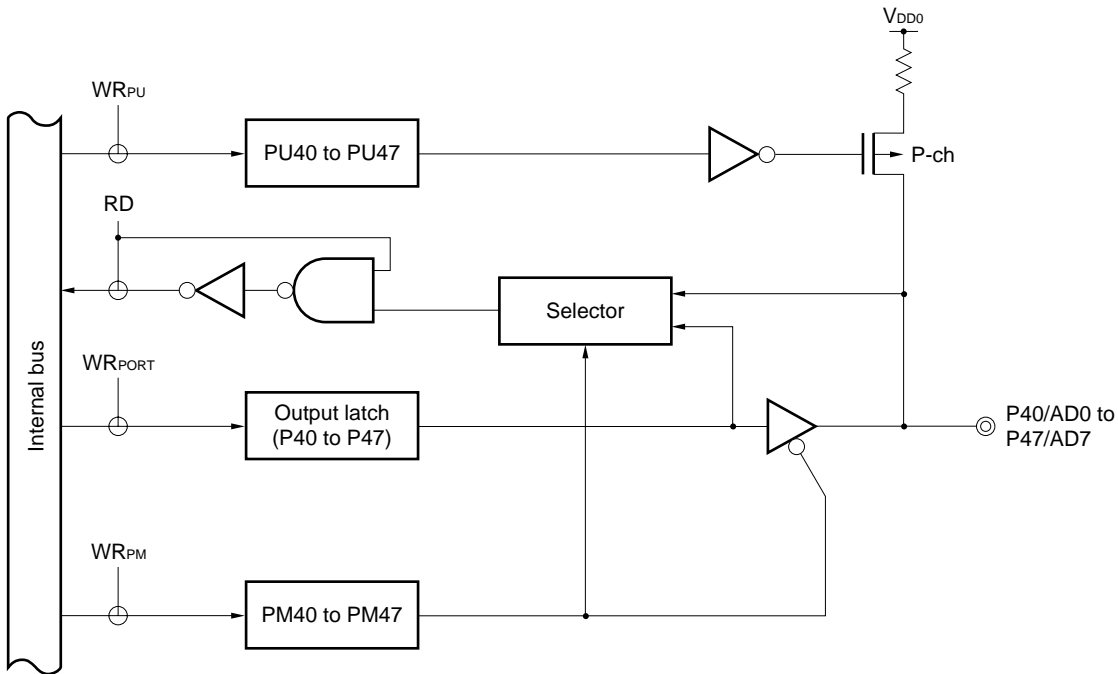

- PU : Pull-up resistor option register
- PM : Port mode register
- RD : Port 4 read signal
- WR : Port 4 write signal

Figure 6-11. Falling Edge Detection Circuit Block Diagram

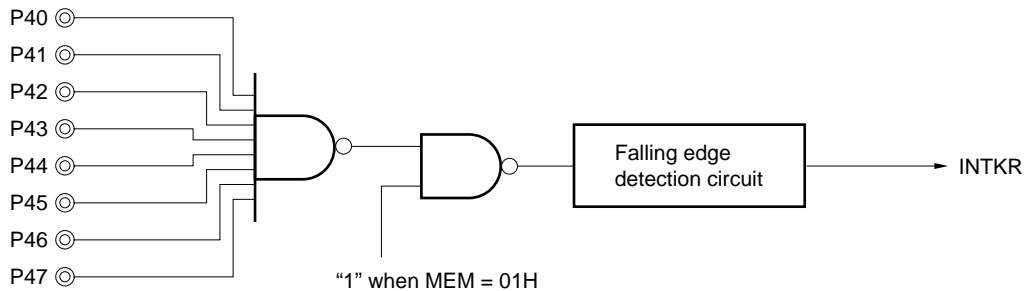

6.2.7 Port 5

Port 5 is an 8-bit input/output port with output latch. The P50 to P57 pins can specify the input mode/output mode in 1-bit units with port mode register 5 (PM5). An on-chip pull-up resistor of P50 to P57 pins can be used for them in 1-bit units with pull-up resistor option register 5 (PU5).


Port 5 can drive LEDs directly.

This port can also be used as an address bus in external memory expansion mode.

$\overline{\text{RESET}}$ input sets port 5 to input mode.

Figure 6-12 shows a block diagram of port 5.

Figure 6-12. P50 to P57 Block Diagram

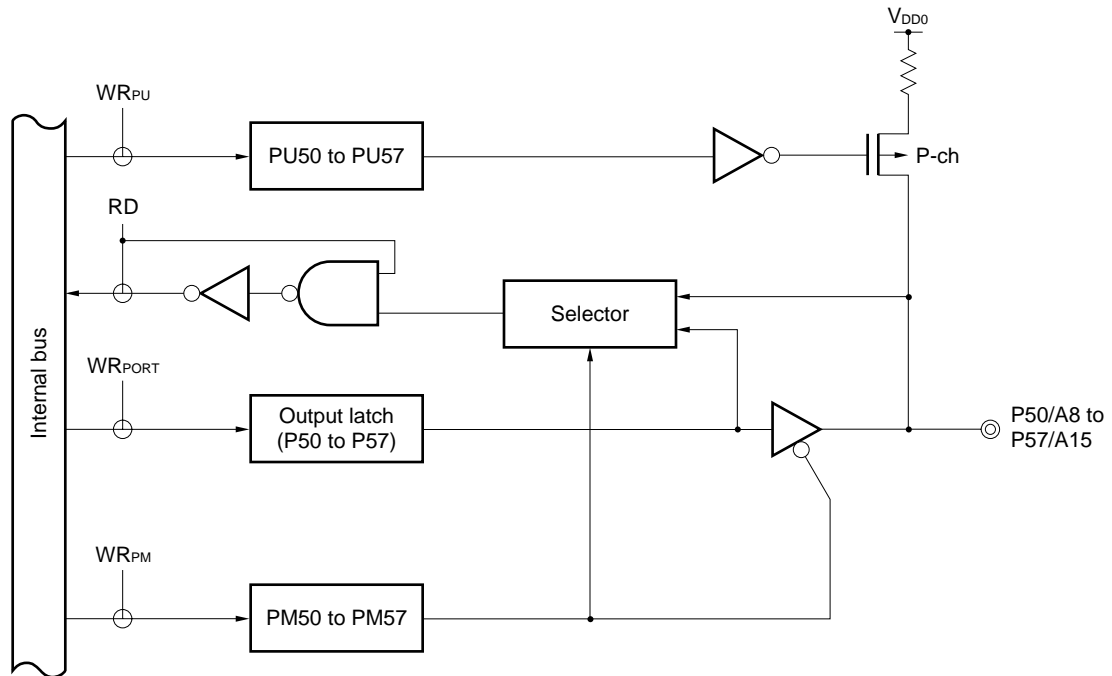

- PU : Pull-up resistor option register
- PM : Port mode register
- RD : Port 5 read signal
- WR : Port 5 write signal

6.2.8 Port 6

Port 6 is a 4-bit input/output port with output latch. The P64 to P67 pins can specify the input mode/output mode in 1-bit units with port mode register 6 (PM6).

An on-chip pull-up resistor of P64 to P67 pins can be used for them in 1-bit units with pull-up resistor option register 6 (PU6).


This port can also be used as a control signal output in external memory expansion mode.

$\overline{\text{RESET}}$ input sets port 6 to input mode.

Figure 6-13 shows a block diagram of port 6.

Caution When external wait is not used in external memory expansion mode, P66 can be used as an input/output port.

Figure 6-13. P64 to P67 Block Diagram

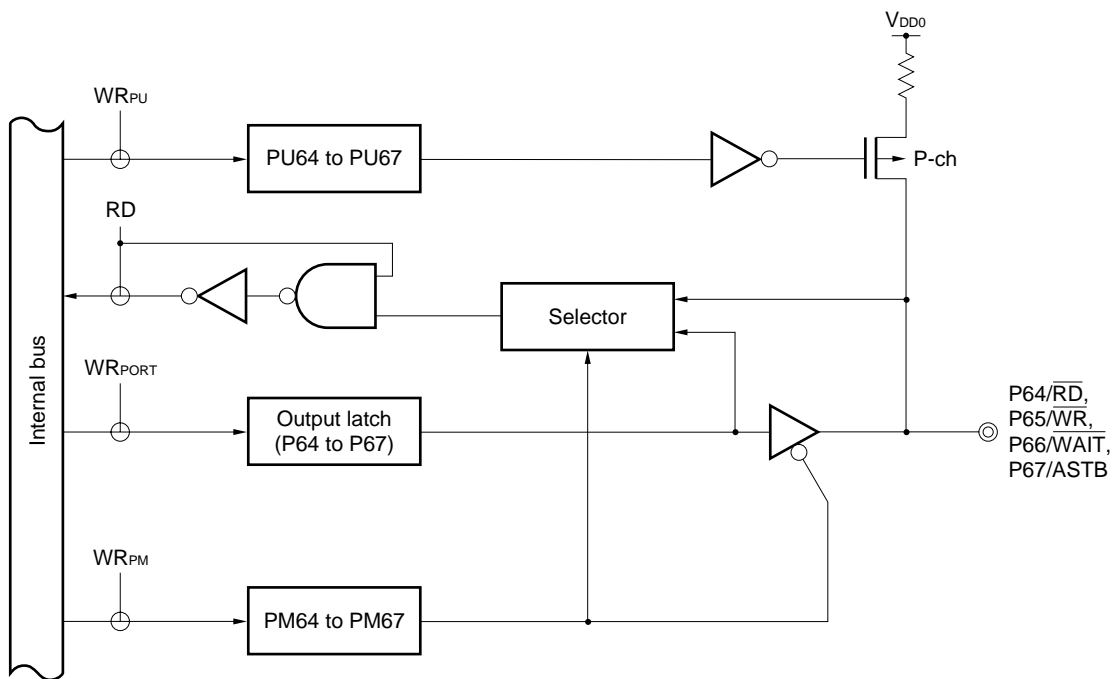

- PU : Pull-up resistor option register
- PM : Port mode register
- RD : Port 6 read signal
- WR : Port 6 write signal

6.2.9 Port 7


This is a 6-bit input/output port with output latches. Input mode/output mode can be specified bit-wise by means of port mode register 7 (PM7). An on-chip pull-up resistor of P70 to P75 pins can be used as a 1-bit unit by means of pull-up resistor option register 7 (PU7).

This port can also be used as a timer input/output, clock output, and buzzer output.

$\overline{\text{RESET}}$ input sets the input mode.

Figure 6-14 shows a block diagram of port 7.

Figure 6-14. P70 to P75 Block Diagram

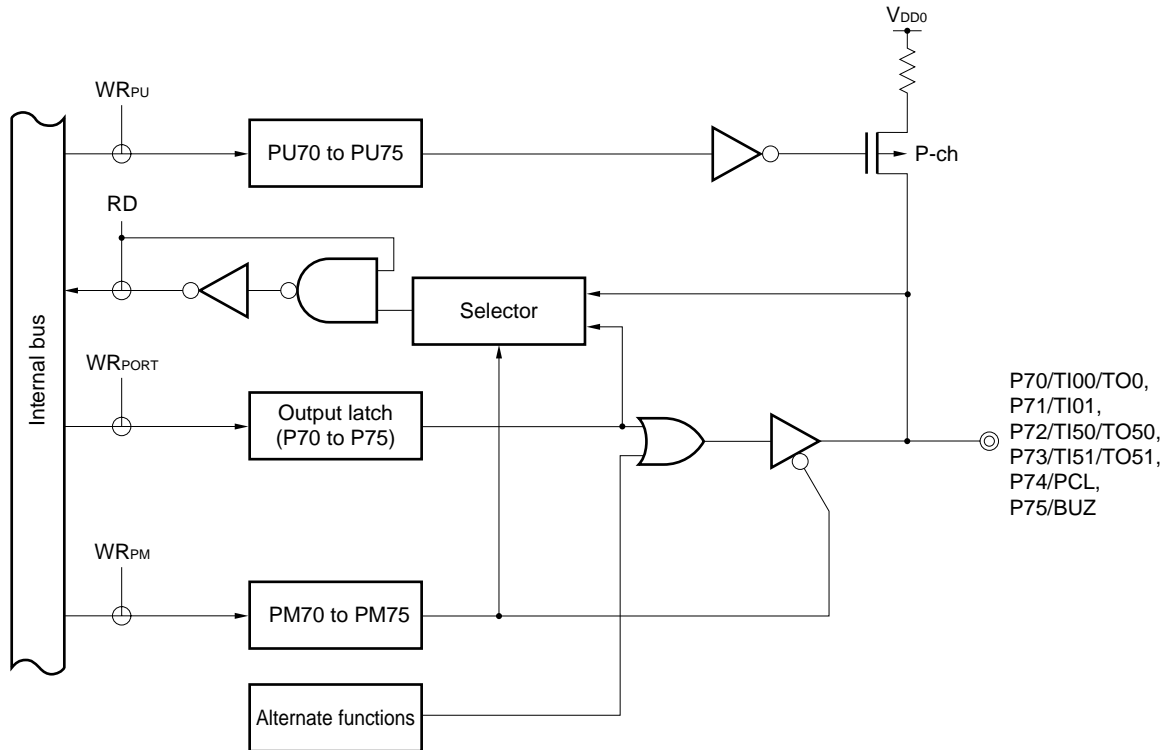

- PU : Pull-up resistor option register
- PM : Port mode register
- RD : Port 7 read signal
- WR : Port 7 write signal

6.3 Port Function Control Registers

The following two types of registers control the ports.

- Port mode registers (PM0, PM2 to PM7)
- Pull-up resistor option register (PU0, PU2 to PU7)

(1) Port mode registers (PM0, PM2 to PM7)

These registers are used to set port input/output in 1-bit units.

PM0 and PM2 to PM7 are independently set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets registers to FFH.

Cautions 1. Pins P10 and P17 are input-only pins.

2. As port 0 has an alternate function as an external interrupt input, when the port function output mode is specified and the output level is changed, the interrupt request flag is set. When the output mode is used, therefore, the interrupt mask flag should be set to 1 beforehand.
3. If a port has an alternate function pin and it is used as an alternate output function, set the output latches (P0 and P2 through P7) to 0.

Figure 6-15. Port Mode Register (PM0, PM2 to PM7) Format

Address: FF20H After Reset : FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM0	1	1	1	1	PM03	PM02	PM01	PM00

Address: FF22H After Reset : FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM2	1	1	PM25	PM24	PM23	PM22	PM21	PM20

Address: FF23H After Reset : FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM3	1	PM36	PM35	PM34	PM33	PM32	PM31	PM30

Address: FF24H After Reset : FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM4	PM47	PM46	PM45	PM44	PM43	PM42	PM41	PM40

Address: FF25H After Reset : FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM5	PM57	PM56	PM55	PM54	PM53	PM52	PM51	PM50

Address: FF26H After Reset : FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM6	PM67	PM66	PM65	PM64	1	1	1	1

Address: FF27H After Reset : FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM7	1	1	PM75	PM74	PM73	PM72	PM71	PM70

PMmn	Pmn Pin Input/Output Mode Selection (m = 0, 2 to 7: n = 0 to 7)
0	Output mode (Output buffer on)
1	Input mode (Output buffer off)

(2) Pull-up resistor option register (PU0, PU2 to PU7)

This register is used to set whether to use an internal pull-up resistor at each port or not. By setting PU0 and PU2 through PU7, the on-chip pull-up resistors of the port pins corresponding to the bits in PU0 and PU2 through PU7 can be used.

PU0 and PU2 to PU7 are set with a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets this register to 00H.

- Cautions**
1. The P10 and P17 pins do not incorporate a pull-up resistor.
 2. Pins P30 to P33 (in $\mu\text{PD780024AY}$ and 780034AY Subseries, P30 and P31 pins) can be used with pull-up resistor by mask option only for mask ROM version.
 3. When PUm is set to 1, the on-chip pull-up resistor is connected irrespective of the input/output mode. When using in output mode, therefore, set the bit of PUm to 0 (m = 0, 2 through 7).

Figure 6-16. Pull-Up Resistor Option Register (PU0, PU2 to PU7) Format

Address: FF30H After Reset : 00H R/W

Symbol	7	6	5	4	3	2	1	0
PU0	0	0	0	0	PU03	PU02	PU01	PU00

Address: FF32H After Reset : 00H R/W

Symbol	7	6	5	4	3	2	1	0
PU2	0	0	PU25	PU24	PU23	PU22	PU21	PU20

Address: FF33H After Reset : 00H R/W

Symbol	7	6	5	4	3	2	1	0
PU3	0	PU36	PU35	PU34	0	0	0	0

Address: FF34H After Reset : 00H R/W

Symbol	7	6	5	4	3	2	1	0
PU4	PU47	PU46	PU45	PU44	PU43	PU42	PU41	PU40

Address: FF35H After Reset : 00H R/W

Symbol	7	6	5	4	3	2	1	0
PU5	PU57	PU56	PU55	PU54	PU53	PU52	PU51	PU50

Address: FF36H After Reset : 00H R/W

Symbol	7	6	5	4	3	2	1	0
PU6	PU67	PU66	PU65	PU64	0	0	0	0

Address: FF37H After Reset : 00H R/W

Symbol	7	6	5	4	3	2	1	0
PU7	0	0	PU75	PU74	PU73	PU72	PU71	PU70

PU _m n	P _m n Pin Internal Pull-Up Resistor Selection (m = 0, 2 to 7: n = 0 to 7)
0	On-chip pull-up resistor not used
1	On-chip pull-up resistor used

6.4 Port Function Operations

Port operations differ depending on whether the input or output mode is set, as shown below.

6.4.1 Writing to input/output port

(1) Output mode

A value is written to the output latch by a transfer instruction, and the output latch contents are output from the pin.

Once data is written to the output latch, it is retained until data is written to the output latch again.

(2) Input mode

A value is written to the output latch by a transfer instruction, but since the output buffer is OFF, the pin status does not change.

Once data is written to the output latch, it is retained until data is written to the output latch again.

Caution In the case of 1-bit memory manipulation instruction, although a single bit is manipulated the port is accessed as an 8-bit unit. Therefore, on a port with a mixture of input and output pins, the output latch contents for pins specified as input are undefined except for the manipulated bit.

6.4.2 Reading from input/output port

(1) Output mode

The output latch contents are read by a transfer instruction. The output latch contents do not change.

(2) Input mode

The pin status is read by a transfer instruction. The output latch contents do not change.

6.4.3 Operations on input/output port

(1) Output mode

An operation is performed on the output latch contents, and the result is written to the output latch. The output latch contents are output from the pins.

Once data is written to the output latch, it is retained until data is written to the output latch again.

(2) Input mode

The output latch contents are undefined, but since the output buffer is OFF, the pin status does not change.

Caution In the case of 1-bit memory manipulation instruction, although a single bit is manipulated, the port is accessed as an 8-bit unit. Therefore, on a port with a mixture of input and output pins, the output latch contents for pins specified as input are undefined, even for bits other than the manipulated bit.

6.5 Selection of Mask Option

The following mask option is provided in the mask ROM version. The flash memory versions have no mask options.

Table 6-6. Comparison between Mask ROM Version and Flash Memory Version

Pin Name	Mask ROM Version	Flash Memory Version
Mask option for pins P30 to P33 ^{Note}	Bit-wise specifiabile on-chip pull-up resistors	Cannot specify an on-chip pull-up resistor

Note For μ PD780024AY and 780034AY Subseries products, only the P30 and P31 pins can incorporate a pull-up resistor.

[MEMO]

CHAPTER 7 CLOCK GENERATOR

7.1 Clock Generator Functions

The clock generator generates the clock to be supplied to the CPU and peripheral hardware. The following two types of system clock oscillators are available.

(1) Main system clock oscillator

This circuit oscillates at frequencies of 1 to 8.38 MHz. Oscillation can be stopped by executing the STOP instruction or setting the processor clock control register (PCC).

(2) Subsystem clock oscillator

The circuit oscillates at a frequency of 32.768 kHz. Oscillation cannot be stopped. If the subsystem clock oscillator is not used, the internal feedback resistor can be disabled by the processor clock control register (PCC). This enables to reduce the power consumption in the STOP mode.


7.2 Clock Generator Configuration

The clock generator consists of the following hardware.

Table 7-1. Clock Generator Configuration

Item	Configuration
Control register	Processor clock control register (PCC)
Oscillators	Main system clock oscillator Subsystem clock oscillator

Figure 7-1. Clock Generator Block Diagram

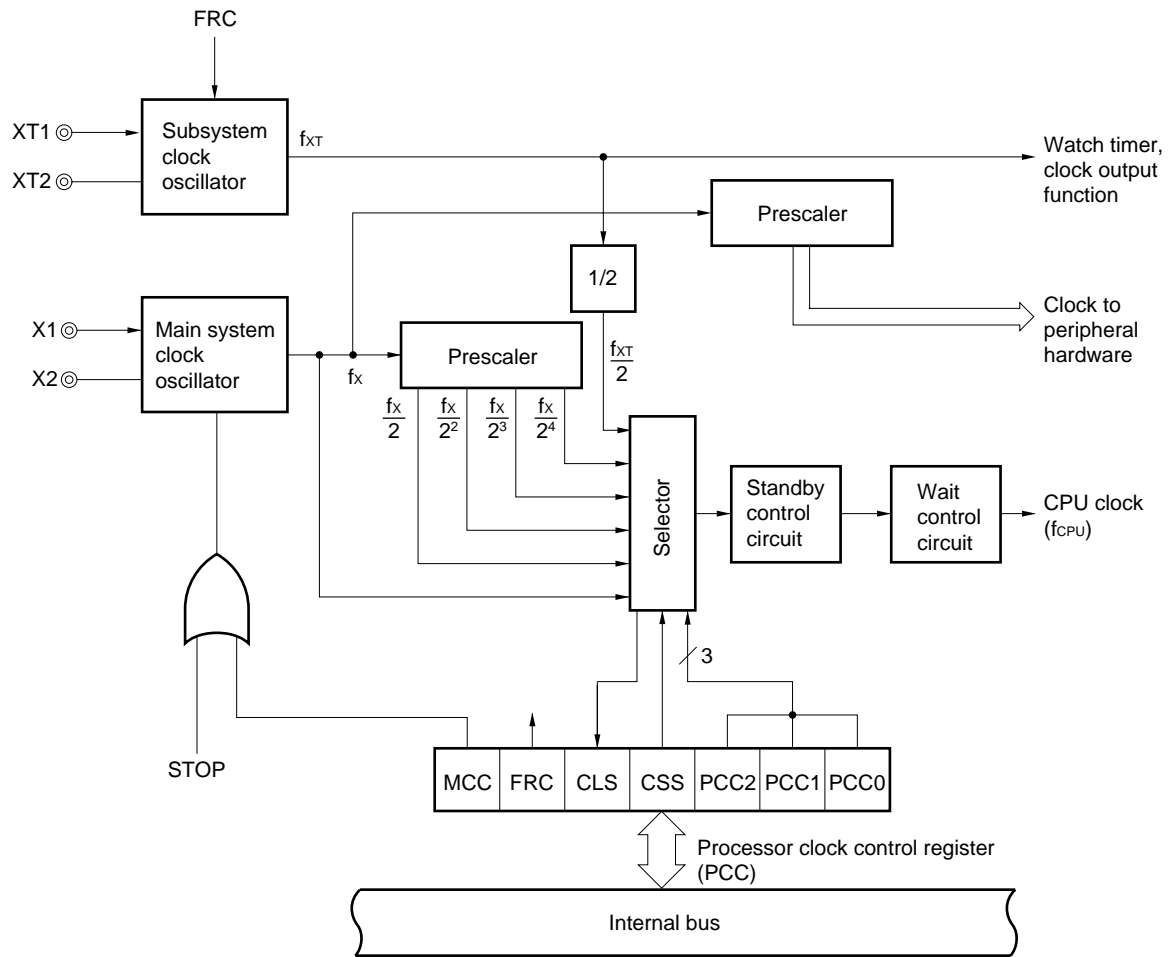

7.3 Clock Generator Control Register

The clock generator is controlled by the processor clock control register (PCC).

The PCC sets whether to use CPU clock selection, the ratio of division, main system clock oscillator operation/stop and subsystem clock oscillator internal feedback resistor.

The PCC is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets the PCC to 04H.

Figure 7-2. Subsystem Clock Feedback Resistor

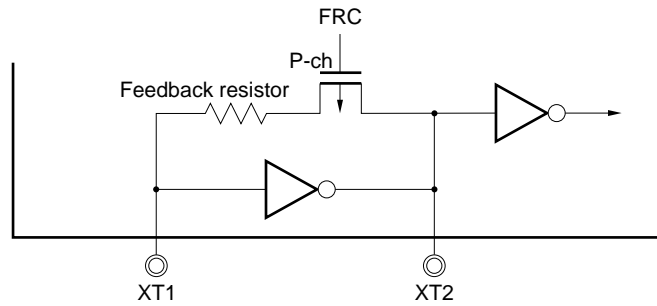


Figure 7-3. Processor Clock Control Register (PCC) Format

Address: FFFBH After Reset: 04H R/W>Note 1

Symbol	7	6	5	4	3	2	1	0
PCC	MCC	FRC	CLS	CSS	0	PCC2	PCC1	PCC0

MCC	Main System Clock Oscillation Control ^{Note 2}
0	Oscillation possible
1	Oscillation stopped

FRC	Subsystem Clock Feedback Resistor Selection
0	Internal feedback resistor used
1	Internal feedback resistor not used

CLS	CPU Clock Status
0	Main system clock
1	Subsystem clock

CSS	PCC2	PCC1	PCC0	CPU Clock (f _{cpu}) Selection
0	0	0	0	f _x
	0	0	1	f _x /2
	0	1	0	f _x /2 ²
	0	1	1	f _x /2 ³
	1	0	0	f _x /2 ⁴
1	0	0	0	f _{xT} /2
	0	0	1	
	0	1	0	
	0	1	1	
	1	0	0	
Other than above				Setting prohibited

- Notes**
1. Bit 5 is Read Only.
 2. When the CPU is operating on the subsystem clock, MCC should be used to stop the main system clock oscillation. A STOP instruction should not be used.

- Cautions**
1. Be sure to set bit 3 to 0.
 2. When the external clock is input, MCC should not be set.
This is because the X2 pin is connected to V_{DD1} via a pull-up resistor.

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. f_{xT} : Subsystem clock oscillation frequency

The fastest instructions of μ PD780024A, 780034A, 780024AY, and 780034AY Subseries are carried out in two CPU clocks. The relationship of CPU clock (f_{CPU}) and minimum instruction execution time is shown in table 7-2.

Table 7-2. Relationship of CPU Clock and Min. Instruction Execution Time

CPU Clock (f_{CPU})	Min. Instruction Execution Time: $2/(f_{CPU})$
f_x	0.24 μ s
f_x2	0.48 μ s
f_x2^2	0.95 μ s
f_x2^3	1.91 μ s
f_x2^4	3.81 μ s
$f_{XT}2$	122 μ s

$f_x = 8.38$ MHz, $f_{XT} = 32.768$ kHz

f_x : Main system clock oscillation frequency

f_{XT} : Subsystem clock oscillation frequency

7.4 System Clock Oscillator

7.4.1 Main system clock oscillator


The main system clock oscillator oscillates with a crystal resonator or a ceramic resonator (8.38 MHz TYP.) connected to the X1 and X2 pins.

External clocks can be input to the main system clock oscillator. In this case, input a clock signal to the X1 pin and an inversed-phase clock signal to the X2 pin.


Figure 7-4 shows an external circuit of the main system clock oscillator.

Figure 7-4. External Circuit of Main System Clock Oscillator

(a) Crystal and ceramic oscillation



(b) External clock



Caution Do not execute the STOP instruction and do not set MCC (bit 7 of processor clock control register (PCC)) to 1 if an external clock is input. This is because when the STOP instruction or MCC is set to 1, the main system clock operation stops and the X2 pin is connected to V_{DD1} via a pull-up resistor.

7.4.2 Subsystem clock oscillator


The subsystem clock oscillator oscillates with a crystal resonator (32.768 kHz TYP.) connected to the XT1 and XT2 pins.

External clocks can be input to the main system clock oscillator. In this case, input a clock signal to the XT1 pin and an inversed-phase clock signal to the XT2 pin.


Figure 7-5 shows an external circuit of the subsystem clock oscillator.

Figure 7-5. External Circuit of Subsystem Clock Oscillator

(a) Crystal oscillation

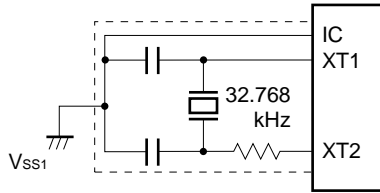

(b) External clock



Cautions are listed on the next page.

Cautions 1. When using the main system clock oscillator and a subsystem clock oscillator, carry out wiring in the broken line area in Figures 7-4 and 7-5 to prevent any effects from wiring capacitance.


- Minimize the wiring length.
- Do not allow wiring to intersect with other signal lines. Do not route the wiring in the vicinity of a line through which a high-fluctuating current flows.
- Always keep the ground of the capacitor of the oscillator at the same potential as V_{SS1} . Do not ground a capacitor to a ground pattern where high-current flows.
- Do not fetch signals from the oscillator.

Take special note of the fact that the subsystem clock oscillator is a circuit with low-level amplification so that current consumption is maintained at low levels.


Figure 7-6 shows examples of incorrect oscillator connection.

Figure 7-6. Examples of Incorrect Oscillator Connection (1/2)

(a) Too long wiring

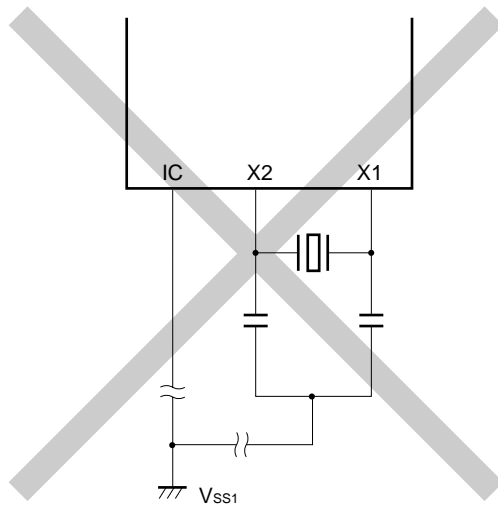


(b) Crossed signal line

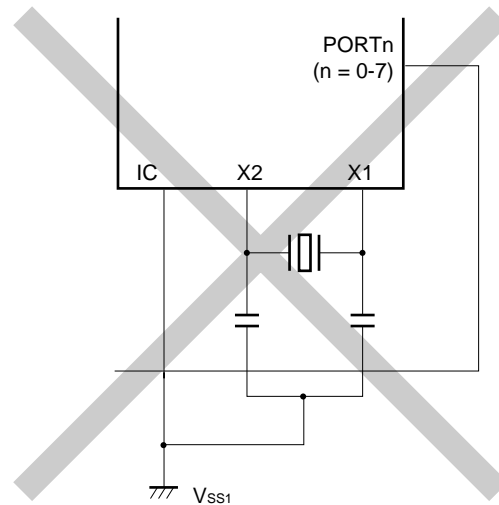


Remark When using a subsystem clock, replace X1 and X2 with XT1 and XT2, respectively. Further, insert resistors in series on the side of XT2.

Figure 7-6. Examples of Incorrect Oscillator Connection (2/2)


(c) Wiring near high alternating current

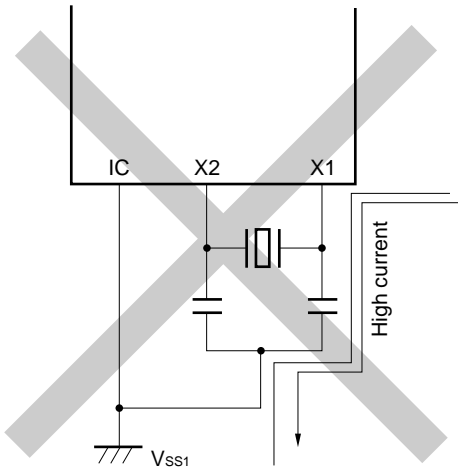

(d) Current flowing through ground line of oscillator (potential at points A, B, and C fluctuates)

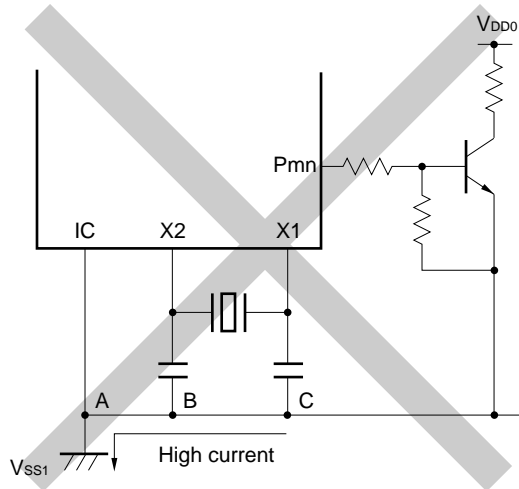

(e) Signals are fetched

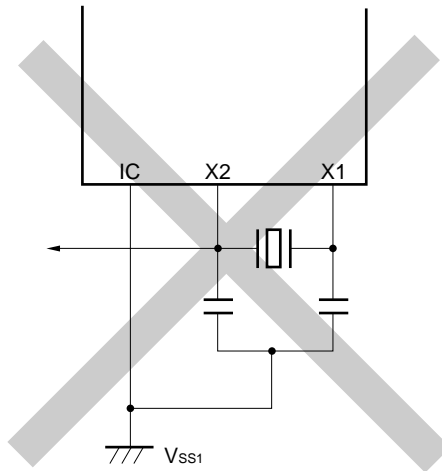

Remark When using a subsystem clock, replace X1 and X2 with XT1 and XT2, respectively. Also, insert resistors in series on the XT2 side.

Cautions 2. When X2 and XT1 are wired in parallel, the cross-talk noise of X2 may increase with XT1, resulting in malfunctioning.

To prevent that from occurring, it is recommended to wire X2 and XT1 so that they are not in parallel, and to connect the IC pin between X2 and XT1 directly to V_{SS1}.

7.4.3 Scaler

The scaler divides the main system clock oscillator output (fx) and generates various clocks.

7.4.4 When no subsystem clocks are used

If it is not necessary to use subsystem clocks for low power consumption operations and clock operations, connect the XT1 and XT2 pins as follows.

XT1 : Connect to V_{DD0}

XT2 : Open

In this state, however, some current may leak via the internal feedback resistor of the subsystem clock oscillator when the main system clock stops. To minimize leakage current, the above internal feedback resistor can be removed with bit 6 (FRC) of the processor clock control register (PCC). In this case also, connect the XT1 and XT2 pins as described above.

7.5 Clock Generator Operations

The clock generator generates the following various types of clocks and controls the CPU operating mode including the standby mode.

- Main system clock f_X
- Subsystem clock f_{XT}
- CPU clock f_{CPU}
- Clock to peripheral hardware

The following clock generator functions and operations are determined with the processor clock control register (PCC).

- Upon generation of $\overline{\text{RESET}}$ signal, the lowest speed mode of the main system clock ($3.81 \mu\text{s}$ @ 8.38-MHz oscillation) is selected (PCC = 04H). Main system clock oscillation stops while low level is applied to $\overline{\text{RESET}}$ pin.
- With the main system clock selected, one of the five CPU clock types ($0.24 \mu\text{s}$, $0.48 \mu\text{s}$, $0.95 \mu\text{s}$, $1.91 \mu\text{s}$, $3.81 \mu\text{s}$, @ 8.38-MHz operation) can be selected by setting the PCC.
- With the main system clock selected, two standby modes, the STOP and HALT modes, are available. To reduce current consumption in the STOP mode, the subsystem clock feedback resistor can be disconnected to stop the subsystem clock.
- The PCC can be used to select the subsystem clock and to operate the system with low-current consumption ($122 \mu\text{s}$ @ 32.768-kHz operation).
- With the subsystem clock selected, main system clock oscillation can be stopped with the PCC. The HALT mode can be used. However, the STOP mode cannot be used. (Subsystem clock oscillation cannot be stopped.)
- The main system clock is divided and supplied to the peripheral hardware. The subsystem clock is supplied to the watch timer and clock output functions only. Thus the watch function and the clock output function can also be continued in the standby state. However, since all other peripheral hardware operate with the main system clock, the peripheral hardware also stops if the main system clock is stopped. (Except external input clock operation)


7.5.1 Main system clock operations

When operated with the main system clock (with bit 5 (CLS) of the processor clock control register (PCC) set to 0), the following operations are carried out by PCC setting.

- (a) Because the operation guarantee instruction execution speed depends on the power supply voltage, the minimum instruction execution time can be changed by bits 0 to 2 (PCC0 to PCC2) of the PCC.
- (b) If bit 7 (MCC) of the PCC is set to 1 when operated with the main system clock, the main system clock oscillation does not stop. When bit 4 (CSS) of the PCC is set to 1 and the operation is switched to subsystem clock operation (CLS = 1) after that, the main system clock oscillation stops (see **Figure 7-7**).

Figure 7-7. Main System Clock Stop Function (1/2)

(a) Operation when MCC is set after setting CSS with main system clock operation

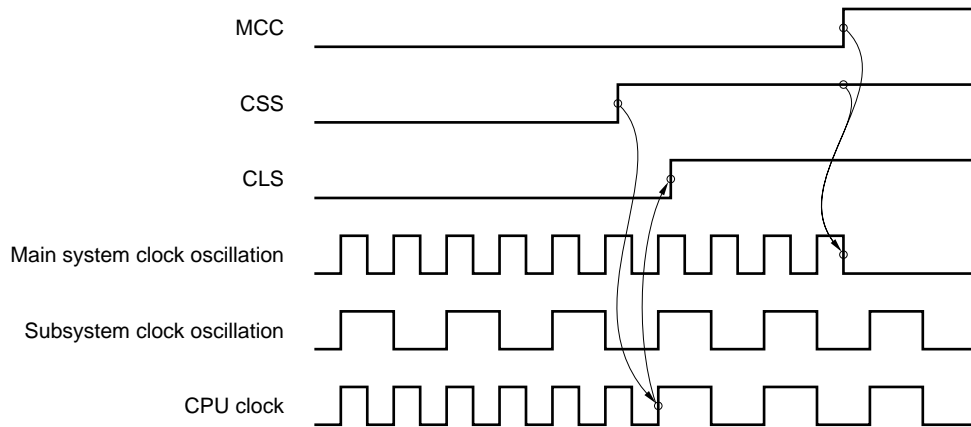

(b) Operation when MCC is set in case of main system clock operation


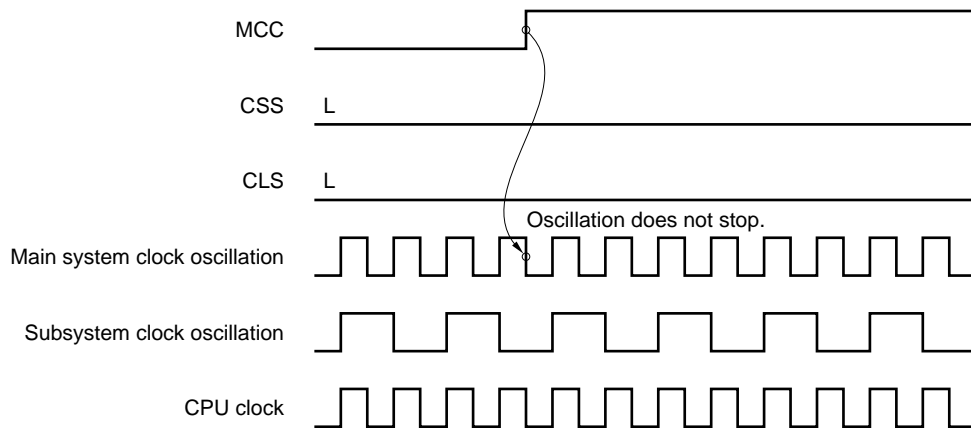


Figure 7-7. Main System Clock Stop Function (2/2)

(c) Operation when CSS is set after setting MCC with main system clock operation

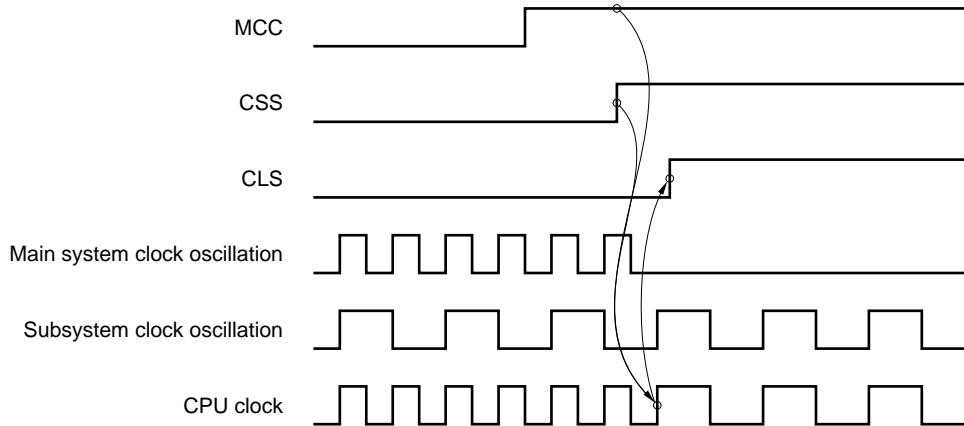

7.5.2 Subsystem clock operations

When operated with the subsystem clock (with bit 5 (CLS) of the processor clock control register (PCC) set to 1), the following operations are carried out.

- The minimum instruction execution time remains constant ($122 \mu\text{s}$ @ 32.768-kHz operation) irrespective of bits 0 to 2 (PCC0 to PCC2) of the PCC.
- Watchdog timer counting stops.

Caution Do not execute the STOP instruction while the subsystem clock is in operation.

7.6 Changing System Clock and CPU Clock Settings

7.6.1 Time required for switchover between system clock and CPU clock

The system clock and CPU clock can be switched over by means of bits 0 to 2 (PCC0 to PCC2) and bit 4 (CSS) of the processor clock control register (PCC).

The actual switchover operation is not performed directly after writing to the PCC, but operation continues on the pre-switchover clock for several instructions (see **Table 7-3**).

Determination as to whether the system is operating on the main system clock or the subsystem clock is performed by bit 5 (CLS) of the PCC register.

Table 7-3. Maximum Time Required for CPU Clock Switchover

Set Value before Switchover				Set Value after Switchover																							
CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0	CSS	PCC2	PCC1	PCC0
				0	0	0	0	0	0	0	1	0	0	1	0	0	0	1	1	0	1	0	0	1	×	×	×
0	0	0	0	/				16 instructions				16 instructions				16 instructions				16 instructions				$f_x/2f_{XT}$ instruction (77 instructions)			
	0	0	1					8 instructions				8 instructions				8 instructions				8 instructions				$f_x/4f_{XT}$ instruction (39 instructions)			
	0	1	0					4 instructions				4 instructions				4 instructions				4 instructions				$f_x/8f_{XT}$ instruction (20 instructions)			
	0	1	1					2 instructions				2 instructions				2 instructions				2 instructions				$f_x/16f_{XT}$ instruction (10 instructions)			
	1	0	0					1 instruction				1 instruction				1 instruction				1 instruction				$f_x/32f_{XT}$ instruction (5 instructions)			
1	×	×	×	1 instruction				1 instruction				1 instruction				1 instruction				1 instruction							

- Remarks**
1. One instruction is the minimum instruction execution time with the pre-switchover CPU clock.
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz and $f_{XT} = 32.768$ kHz.


Caution Selection of the CPU clock cycle scaling factor (PCC0 to PCC2) and switchover from the main system clock to the subsystem clock (changing CSS from 0 to 1) should not be set simultaneously.

Simultaneous setting is possible, however, for selection of the CPU clock cycle scaling factor (PCC0 to PCC2) and switch over from the subsystem clock to the main system clock (changing CSS from 1 to 0).

7.6.2 System clock and CPU clock switching procedure

This section describes switching procedure between the system clock and CPU clock.

Figure 7-8. System Clock and CPU Clock Switching

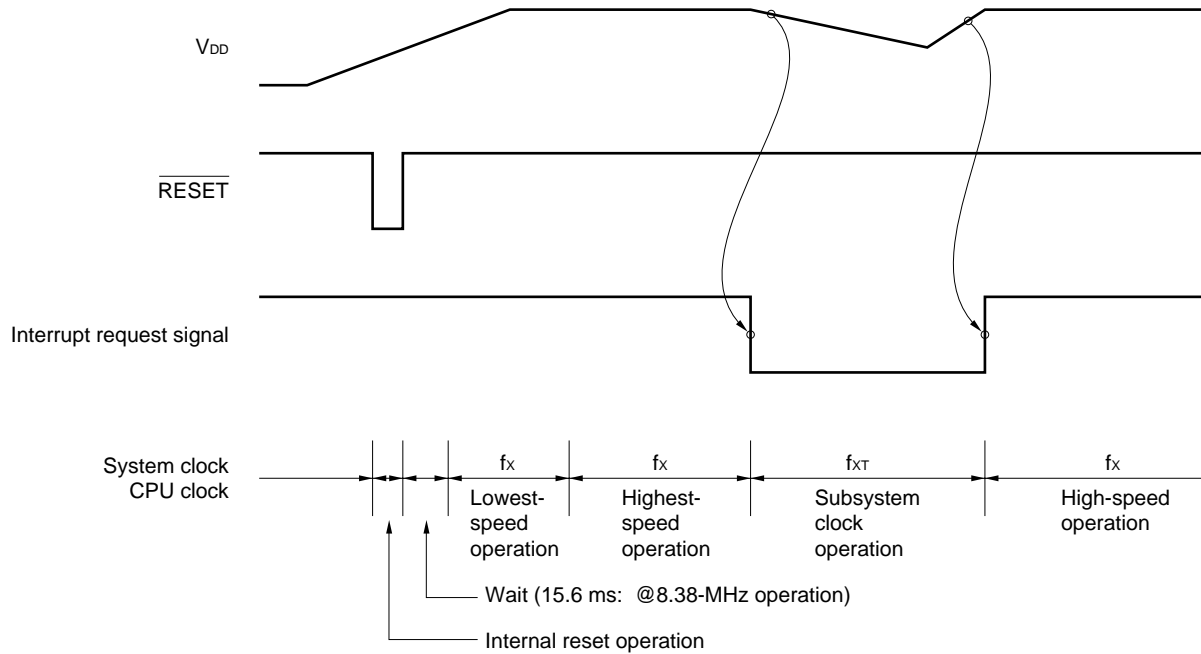

- <1> The CPU is reset by setting the $\overline{\text{RESET}}$ signal to low level after power-on. After that, when reset is released by setting the $\overline{\text{RESET}}$ signal to high level, main system clock starts oscillation. At this time, oscillation stabilization time ($2^{17}/f_x$) is secured automatically. After that, the CPU starts executing the instruction at the minimum speed of the main system clock ($3.81 \mu\text{s}$ @ 8.38-MHz operation).
- <2> After the lapse of a sufficient time for the V_{DD} voltage to increase to enable operation at maximum speeds, the PCC is rewritten and maximum-speed operation is carried out.
- <3> Upon detection of a decrease of the V_{DD} voltage due to an interrupt request signal, the main system clock is switched to the subsystem clock (which must be in an oscillation stable state).
- <4> Upon detection of V_{DD} voltage reset due to an interrupt, 0 is set to the MCC and oscillation of the main system clock is started. After the lapse of time required for stabilization of oscillation, the PCC is rewritten and the maximum-speed operation is resumed.

Caution When subsystem clock is being operated while the main system clock is stopped, if switching to the main system clock is done again, be sure to switch after securing oscillation stabilization time by software.

CHAPTER 8 16-BIT TIMER/EVENT COUNTER

8.1 Outline of Timer Integrated in μ PD780024A, 780034A, 780024AY, 780034AY Subseries

In this chapter, the 16-bit timer/event counter is described. The timers integrated in the μ PD780024A, 780034A, 780024AY, and 780034AY Subseries are outlined below.

(1) 16-bit timer/event counter (TM0)

The TM0 can be used as an interval timer, PPG output, pulse widths measurement (infrared ray remote control receive function), external event counter, square wave output of any frequency, or one-shot pulse output.

(2) 8-bit timer/event counter (TM5)

The TM5 can be used to serve as an interval timer, an external event counter, to output square wave output with any selected frequency, and PWM output. Two 8-bit timer/event counters can be used as one 16-bit timer/event counter (See **CHAPTER 9 8-BIT TIMER/EVENT COUNTER**).

(3) Watch timer (WT)

This timer can set a flag every 0.5 sec. or 0.25 sec. and simultaneously generate an interrupt request at the preset time intervals (See **CHAPTER 10 WATCH TIMER**).

(4) Watchdog timer (WDT)

The watchdog timer can also be used to generate a non-maskable interrupt request, maskable interrupt request, or $\overline{\text{RESET}}$ signal at the preset time intervals (See **CHAPTER 11 WATCHDOG TIMER**).

(5) Clock output/buzzer output control circuit (CKU)

The clock output circuit supplies other devices with the divided main system clock and the subsystem clock, and buzzer output supplies the buzzer frequency with the divided main system clock (See **CHAPTER 12 CLOCK OUTPUT/BUZZER OUTPUT CONTROL CIRCUITS**).

Table 8-1. Timer/Event Counter Operations

		16-Bit Timer/ Event Counter	8-Bit Timer/ Event Counter	Watch Timer	Watchdog Timer
Operation Mode	Interval timer	1 channel	2 channels	1 channel ^{Note1}	1 channel ^{Note2}
	External event counter	√	√	–	–
Function	Timer output	√	√	–	–
	PPG output	√	–	–	–
	PWM output	–	√	–	–
	Pulse width measurement	√	–	–	–
	Square-wave output	√	√	–	–
	One-shot pulse output	√	–	–	–
	Interrupt request	√	√	√	√

- Notes** 1. The watch timer can perform both watch timer and interval timer functions at the same time.
2. WDTM can perform either the watchdog timer function or the interval timer function.

8.2 16-Bit Timer/Event Counter Functions

The 16-bit timer/event counter has the following functions.

- Interval timer
- PPG output
- Pulse width measurement
- External event counter
- Square-wave output
- One-shot pulse output

(1) Interval timer

TM0 generates interrupt request at the preset time interval.

(2) PPG output

TM0 can output a square wave whose frequency and output pulse can be set freely.

(3) Pulse width measurement

TM0 can measure the pulse width of an externally input signal.

(4) External event counter

TM0 can measure the number of pulses of an externally input signal.

(5) Square-wave output

TM0 can output a square wave with any selected frequency.

(6) One-shot pulse output

TM0 is able to output one-shot pulse which can set any width of output pulse.

8.3 16-Bit Timer/Event Counter Configuration

16-bit timer/event counter consists of the following hardware.


Table 8-2. 16-Bit Timer/Event Counter Configuration

Item	Configuration
Timer/counter	16 bits × 1 (TM0)
Register	16-bit capture/compare register: 16 bits × 2 (CR00, CR01)
Timer output	1 (TO0)
Control registers	16-bit timer mode control register 0 (TMC0) Capture/compare control register 0 (CRC0) 16-bit timer output control register 0 (TOC0) Prescaler mode register 0 (PRM0) Port mode register 7 (PM7) ^{Note}

Note See Figure 6-14 P70 to P75 Block Diagram.

Figure 8-1 shows a block diagram.

Figure 8-1. 16-Bit Timer/Event Counter Block Diagram

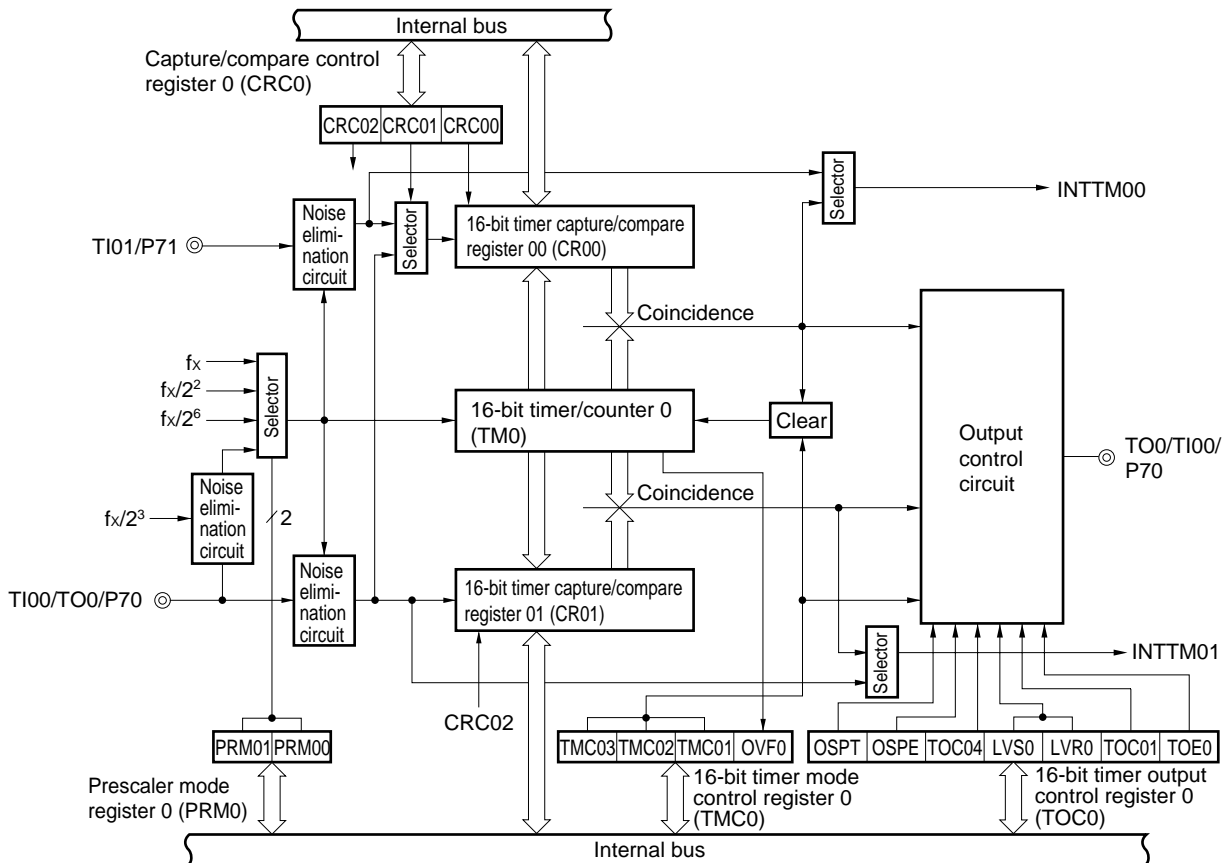

(1) 16-bit timer/counter 0 (TM0)

TM0 is a 16-bit read-only register that counts count pulses.

The counter is incremented in synchronization with the rising edge of an input clock. If the count value is read during operation, input of the count clock is temporarily stopped, and the count value at that point is read. The count value is reset to 0000H in the following cases:

- <1> At $\overline{\text{RESET}}$ input
- <2> If TMC03 and TMC02 are cleared
- <3> If valid edge of TI00 is input in the clear & start mode by inputting valid edge of TI00
- <4> If TM0 and CR00 coincide with each other in the clear & start mode on coincidence between TM0 and CR00
- <5> If OSPT is set in the one-shot pulse output mode

(2) 16-bit timer capture/compare register 00(CR00)

CR00 is a 16-bit register which has the functions of both a capture register and a compare register. Whether it is used as a capture register or as a compare register is set by bit 0 (CRC00) of capture/compare control register 0 (CRC0).

- **When CR00 is used as a compare register**

The value set in the CR00 is constantly compared with the 16-bit timer/counter 0 (TM0) count value, and an interrupt request (INTTM00) is generated if they match. It can also be used as the register which holds the interval time then TM0 is set to interval timer operation, and as the register which sets the pulse width in the PWM operating mode.

- **When CR00 is used as a capture register**

It is possible to select the valid edge of the TI00/TO0/P70 pin or the TI01/P71 pin as the capture trigger. Setting of the TI00 or TI01 valid edge is performed by means of prescaler mode register 0 (PRM0). If CR00 is specified as a capture register and capture trigger is specified to be the valid edge of the TI00/TO0/P70 pin, the situation is as shown in Table 8-3. On the other hand, when capture trigger is specified to be the valid edge of the TI01/P71 pin, the situation is as shown in Table 8-4.

Table 8-3. TI00/TO0/P70 Pin Valid Edge and CR00, CR01 Capture Trigger

ES01	ES00	TI00/TO0/P70 Pin Valid Edge	CR00 Capture Trigger	CR01 Capture Trigger
0	0	Falling edge	Rising edge	Rising edge
0	1	Rising edge	Falling edge	Falling edge
1	0	Setting prohibited	Setting prohibited	Setting prohibited
1	1	Both rising and falling edges	No capture operation	Both rising and falling edges

Table 8-4. TI01/P71 Pin Valid Edge and CR00 Capture Trigger

ES11	ES10	TI01/P71 Pin Valid Edge	CR00 Capture Trigger
0	0	Falling edge	Falling edge
0	1	Rising edge	Rising edge
1	0	Setting prohibited	Setting prohibited
1	1	Both rising and falling edges	Both rising and falling edges

CR00 is set by a 16-bit memory manipulation instruction.
After $\overline{\text{RESET}}$ input, the value of CR00 is undefined.

- Cautions**
1. **Set a value other than 0000H in CR00. This means 1-pulse count operation cannot be performed when CR00 is used as an event counter. However, in the free-running mode and in the clear mode using the valid edge of TI00, if 0000H is set to CR00, an interrupt request (INTTM00) is generated following overflow (FFFFH).**
 2. **When P70 is used as the valid edge of TI00, it cannot be used as timer output (TO0). Moreover, when P70 is used as TO0, it cannot be used as the valid edge of TI00.**

(3) 16-bit capture/compare register 01 (CR01)

CR01 is a 16-bit register which has the functions of both a capture register and a compare register. Whether it is used as a capture register or a compare register is set by bit 2 (CRC02) of capture/compare control register 0 (CRC0).

- **When CR01 is used as a compare register**
The value set in the CR01 is constantly compared with the 16-bit timer/counter 0 (TM0) count value, and an interrupt request (INTTM01) is generated if they match.
- **When CR01 is used as a capture register**
It is possible to select the valid edge of the TI00/TO0/P70 pin as the capture trigger. The TI00/TO0/P70 valid edge is set by means of prescaler mode register 0 (PRM0).

CR01 is set by a 16-bit memory manipulation instruction.
After $\overline{\text{RESET}}$ input, the value of CR01 is undefined.

- Caution** **Set other than 0000H to CR01. This means 1-pulse count operation cannot be performed when CR01 is used as the event counter. However, in the free-running mode and in the clear mode using the valid edge of TI00, if 0000H is set to CR01, an interrupt request (INTTM01) is generated following overflow (FFFFH).**

8.4 Registers to Control 16-Bit Timer/Event Counter

The following five types of registers are used to control the 16-bit timer/event counter.

- 16-bit timer mode control register 0 (TMC0)
- Capture/compare control register 0 (CRC0)
- 16-bit timer output control register 0 (TOC0)
- Prescaler mode register 0 (PRM0)
- Port mode register 7 (PM7)

(1) 16-bit timer mode control register 0 (TMC0)

This register sets the 16-bit timer operating mode, the 16-bit timer/counter 0 (TM0) clear mode, and output timing, and detects an overflow.

TMC0 is set by a 1-bit or 8-bit memory manipulation instruction.
 $\overline{\text{RESET}}$ input sets TMC0 value to 00H.

- Caution** **The 16-bit timer/counter 0 (TM0) starts operation at the moment a value other than 0, 0 (operation stop mode) is set in TMC02 to TMC03, respectively. Set 0, 0 in TMC02 to TMC03 to stop the operation.**

Figure 8-2. 16-Bit Timer Mode Control Register 0 (TMC0) Format

Address FF60H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
TMC0	0	0	0	0	TMC03	TMC02	TMC01	OVF0

TMC03	TMC02	TMC01	Operating Mode and Clear Mode Selection	TO0 Output Timing Selection	Interrupt Request Generation
0	0	0	Operation stop (TM0 cleared to 0)	No change	Not generated
0	0	1			
0	1	0	Free-running mode	Match between TM0 and CR00 or match between TM0 and CR01	Generated on match between TM0 and CR00, or match between TM0 and CR01
0	1	1		Match between TM0 and CR00, match between TM0 and CR01 or TI00 valid edge	
1	0	0	Clear & start on TI00 valid edge	—	
1	0	1			
1	1	0	Clear & start on match between TM0 and CR00	Match between TM0 and CR00 or match between TM0 and CR01	
1	1	1		Match between TM0 and CR00, match between TM0 and CR01 or TI00 valid edge	

OVF0	16-Bit Timer/Counter 0 (TM0) Overflow Detection
0	Overflow not detected
1	Overflow detected

- Cautions**
1. Timer operation must be stopped before writing to bits other than the OVF0 flag.
 2. Set the valid edge of the TI00/TO0/P70 pin with prescaler mode register 0 (PRM0).
 3. If clear & start mode on match between TM0 and CR00 is selected, when the set value of CR00 is FFFFH and the TM0 value changes from FFFFH to 0000H, OVF0 flag is set to 1.

- Remarks**
1. TO0 : 16-bit timer/event counter output pin
 2. TI00 : 16-bit timer/event counter input pin
 3. TM0 : 16-bit timer/counter 0
 4. CR00 : 16-bit timer capture/compare register 00
 5. CR01 : 16-bit timer capture/compare register 01

(2) Capture/compare control register 0 (CRC0)

This register controls the operation of the 16-bit capture/compare registers (CR00, CR01).

CRC0 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets CRC0 value to 00H.

Figure 8-3. Capture/Compare Control Register 0 (CRC0) Format

Address: FF62H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
CRC0	0	0	0	0	0	CRC02	CRC01	CRC00

CRC02	CR01 Operating Mode Selection
0	Operates as compare register
1	Operates as capture register

CRC01	CR00 Capture Trigger Selection
0	Captures on valid edge of TI01n
1	Captures on valid edge of TI00n by reverse phase

CRC00	CR00 Operating Mode Selection
0	Operates as compare register
1	Operates as capture register

- Cautions**
1. Timer operation must be stopped before setting CRC0.
 2. When clear & start mode on a match between TM0 and CR00 is selected with the 16-bit timer mode control register 0 (TMC0), CR00 should not be specified as a capture register.
 3. If both the rising and falling edges have been selected as the valid edges of TI00, capture is not performed.
 4. To ensure the reliability of the capture operation, the capture trigger requires a pulse two times longer than the count clock selected by prescaler mode register 0 (PRM0).

(3) 16-bit timer output control register 0 (TOC0)

This register controls the operation of the 16-bit timer/event counter output control circuit. It sets R-S type flip-flop (LV0) setting/resetting, output inversion enabling/disabling, 16-bit timer/event counter timer output enabling/disabling, one-shot pulse output operation enabling/disabling, and output trigger for a one-shot pulse by software. TOC0 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets TOC0 value to 00H.

Figure 8-4 shows the TOC0 format.

Figure 8-4. 16-Bit Timer Output Control Register 0 (TOC0) Format

Address: FF63H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
TOC0	0	OSPT	OSPE	TOC04	LVS0	LVR0	TOC01	TOE0

OSPT	Control of One-Shot Pulse Output Trigger by Software
0	One-shot pulse trigger not used
1	One-shot pulse trigger used

OSPE	One-Shot Pulse Output Control
0	Continuous pulse output mode
1	One-shot pulse output mode ^{Note}

TOC04	Timer Output F/F Control by Match of CR01 and TM0
0	Inversion operation disabled
1	Inversion operation enabled

LVS0	LVR0	16-Bit Timer/Event Counter Timer Output F/F Status Setting
0	0	No change
0	1	Timer output F/F reset (0)
1	0	Timer output F/F set (1)
1	1	Setting prohibited

TOC01	Timer Output F/F Control by Match of CR00 and TM0
0	Inversion operation disabled
1	Inversion operation enabled

TOE0	16-Bit Timer/Event Counter Output Control
0	Output disabled (Output set to level 0)
1	Output enabled

Note One-shot pulse output mode operates normally only in the free-running mode.

- Cautions**
1. **Timer operation must be stopped before setting TOC0.**
 2. **If LVS0 and LVR0 are read after data is set, they will be 0.**
 3. **OSPT is cleared automatically after data setting, and will therefore be 0 if read.**
 4. **Do not set OSPT to 1 in any mode other than one-shot pulse output.**

(4) Prescaler mode register 0 (PRM0)

This register is used to set 16-bit timer/counter 0 (TM0) count clock and TI00, TI01 input valid edges. PRM0 is set by an 8-bit memory manipulation instruction. $\overline{\text{RESET}}$ input sets PRM0 value to 00H.

Figure 8-5. Prescaler Mode Register 0 (PRM0) Format

Address: FF61H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
PRM0	ES11	ES10	ES01	ES00	0	0	PRM01	PRM00

ES11	ES10	TI01 Valid Edge Selection
0	0	Falling edge
0	1	Rising edge
1	0	Setting prohibited
1	1	Both falling and rising edges

ES01	ES00	TI00 Valid Edge Selection
0	0	Falling edge
0	1	Rising edge
1	0	Setting prohibited
1	1	Both falling and rising edges

PRM01	PRM00	Count Clock Selection
0	0	f_x (8.38 MHz)
0	1	$f_x/2^2$ (2.09 MHz)
1	0	$f_x/2^6$ (131 kHz)
1	1	TI00 valid edge ^{Note}

Note The external clock requires a pulse two times longer than internal count clock ($f_x/2^3$).

- Cautions**
1. If the valid edge of TI00 is to be set to the count clock, do not set the clear/start mode and the capture trigger at the valid edge of TI00. Moreover, do not use the P70/TI00/TO0 pins as timer outputs (TO0).
 2. Always set data to PRM0 after stopping the timer operation.
 3. If the TI00 or TI01 pin is high level immediately after system reset, the rising edge is immediately detected after the rising edge or both the rising and falling edges are set as the valid edge(s) of the TI00 pin or TI01 pin to enable the operation of the 16-bit timer/counter 0 (TM0). Please be careful when pulling up the TI00 pin or the TI01 pin. However, when re-enabling operation after the operation has been stopped once, the rising edge is not detected.

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. TI00, TI01: 16-bit timer/event counter input pin
 3. Figures in parentheses are for operation with $f_x = 8.38$ MHz.

(5) Port mode register 7 (PM7)

This register sets port 7 input/output in 1-bit units.

When using the P70/TO0/TI00 pin for timer output, set PM70 and the output latch of P70 to 0.

PM7 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets PM7 value to FFH.

Figure 8-6. Port Mode Register 7 (PM7) Format

Address: FF27H After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM7	1	1	PM75	PM74	PM73	PM72	PM71	PM70

PM7n	P7n Pin Input/Output Mode Selection (n = 0 to 5)
0	Output mode (output buffer ON)
1	Input mode (output buffer OFF)

8.5 16-Bit Timer/Event Counter Operations

8.5.1 Interval timer operations

Setting the 16-bit timer mode control register 0 (TMC0) and capture/compare control register 0 (CRC0) as shown in Figure 8-7 allows operation as an interval timer. Interrupt request is generated repeatedly using the count value set in 16-bit timer capture/compare register 00 (CR00) beforehand as the interval.


When the count value of the 16-bit timer/counter 0 (TM0) matches the value set to CR00, counting continues with the TM0 value cleared to 0 and the interrupt request signal (INTTM00) is generated.

Count clock of the 16-bit timer/event counter can be selected with bits 0 to 1 (PRM00, PRM01) of the prescaler mode register 0 (PRM0).


See **8.6 16-Bit Timer/Event Counter Operating Precautions (2) 16-bit compare register setting** about the operation when the compare register value is changed during timer count operation.

Figure 8-7. Control Register Settings for Interval Timer Operation

(a) 16-bit timer mode control register 0 (TMC0)

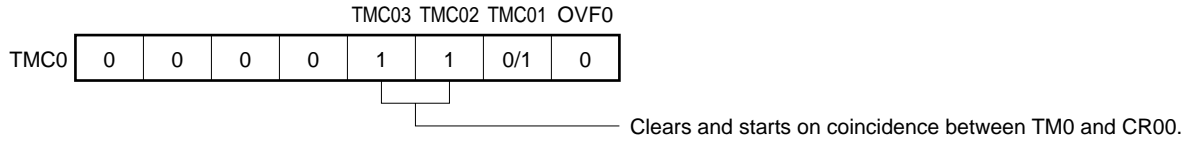

(b) Capture/compare control register 0 (CRC0)

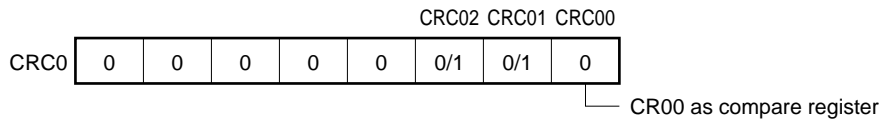

Remark 0/1: Setting 0 or 1 allows another function to be used simultaneously with the interval timer. See **Figures 8-2 and 8-3**.

Figure 8-8. Interval Timer Configuration Diagram


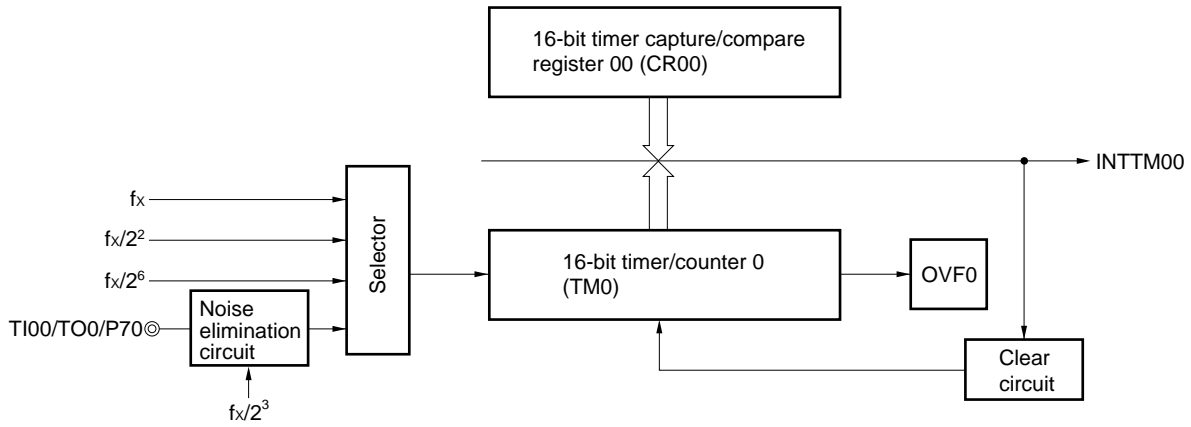


Figure 8-9. Timing of Interval Timer Operation

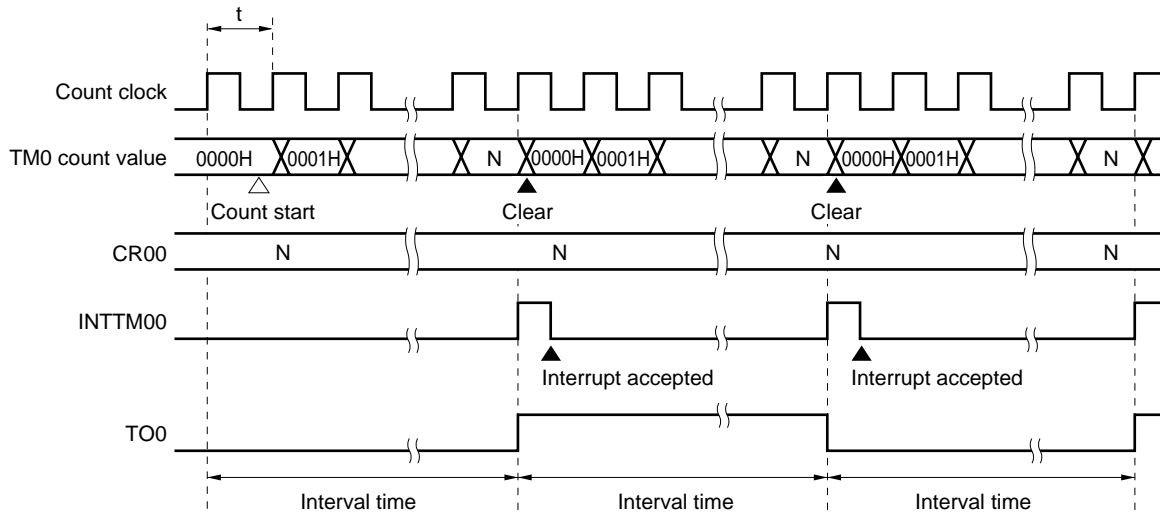

Remark Interval time = $(N + 1) \times t$: $N = 00H$ to FFH


8.5.2 PPG output operations

Setting the 16-bit timer mode control register 0 (TMC0) and capture/compare control register 0 (CRC0) as shown in Figure 8-10 allows operation as PPG (Programmable Pulse Generator) output.


In the PPG output operation, square waves are output from the TO0/TI00/P70 pin with the pulse width and the cycle that correspond to the count values set beforehand in 16-bit timer capture/compare register 01 (CR01) and in 16-bit timer capture/compare register 00 (CR00), respectively.

Figure 8-10. Control Register Settings for PPG Output Operation


(a) 16-bit timer mode control register 0 (TMC0)

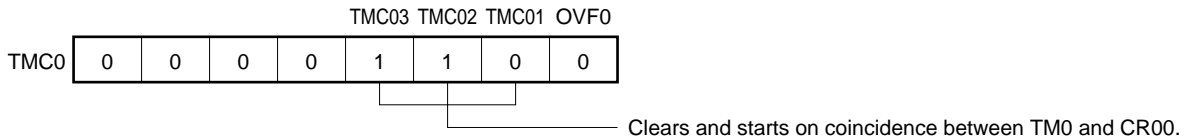

(b) Capture/compare control register 0 (CRC0)

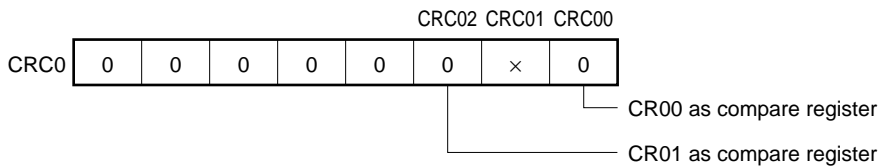

(c) 16-bit timer output control register 0 (TOC0)

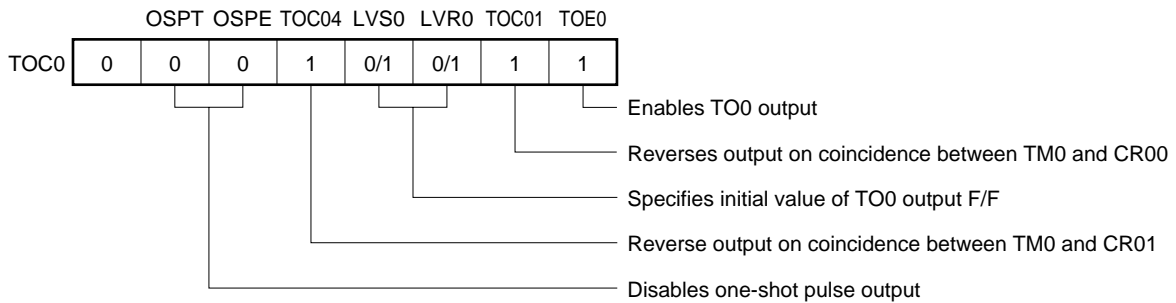

Cautions 1. Values in the following range should be set in CR00 and CR01:

$$0000H < CR01 < CR00 \leq FFFFH$$

2. The cycle of the pulse generated through PPG output (CR00 setting value + 1) has a duty of (CR01 setting value + 1)/(CR00 setting value + 1).

Remark × : Don't care

8.5.3 Pulse width measurement operations

It is possible to measure the pulse width of the signals input to the TI00/TO0/P70 pin and TI01/P71 pin using the 16-bit timer/counter 0 (TM0).

There are two measurement methods: measuring with TM0 used in free-running mode, and measuring by restarting the timer in synchronization with the edge of the signal input to the TI00/TO0/P70 pin.


(1) Pulse width measurement with free-running counter and one capture register

When the 16-bit timer/counter 0 (TM0) is operated in free-running mode (see register settings in **Figure 8-11**), and the edge specified by prescaler mode register 0 (PRM0) is input to the TI00/TO0/P70 pin, the value of TM0 is taken into 16-bit timer capture/compare register 01 (CR01) and an external interrupt request signal (INTTM01) is set.

Any of three edge can be selected—rising, falling, or both edges—specified by means of bits 4 and 5 (ES00 and ES01) of PRM0.

For valid edge detection, sampling is performed at the count clock selected by PRM0), and a capture operation is only performed when a valid level is detected twice, thus eliminating noise with a short pulse width.

Figure 8-11. Control Register Settings for Pulse Width Measurement with Free-Running Counter and One Capture Register

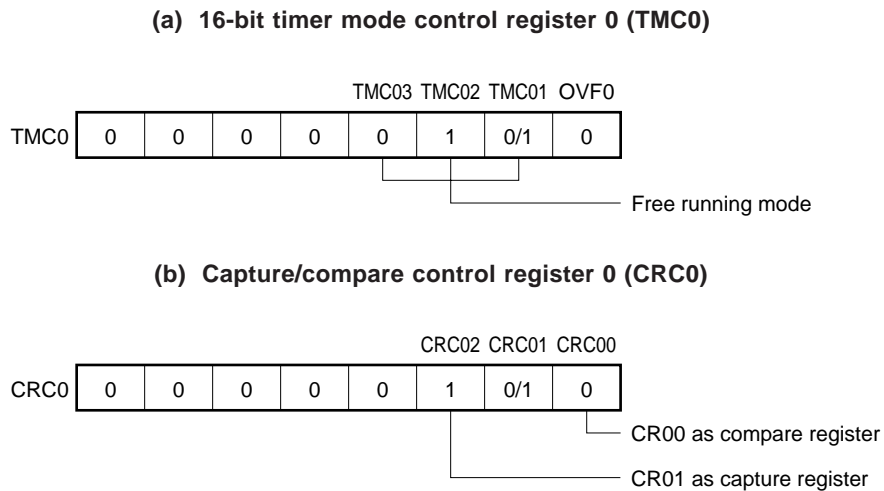

Remark 0/1: Setting 0 or 1 allows another function to be used simultaneously with pulse width measurement. See **Figures 8-2** and **8-3**.

Figure 8-12. Configuration Diagram for Pulse Width Measurement by Free-Running Counter


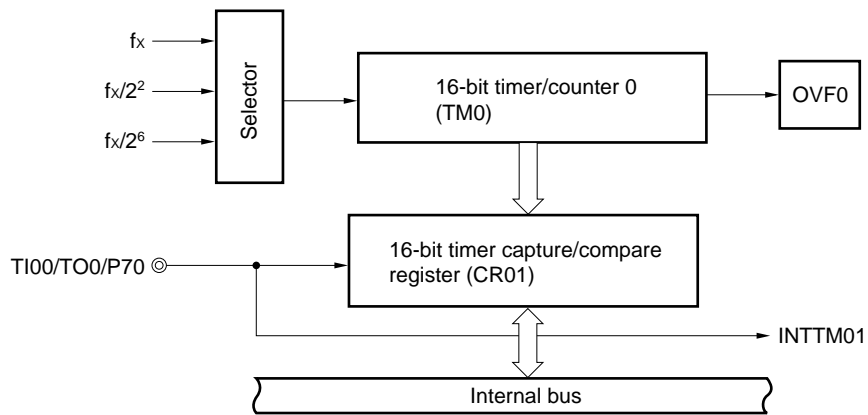


Figure 8-13. Timing of Pulse Width Measurement Operation by Free-Running Counter and One Capture Register (with Both Edges Specified)

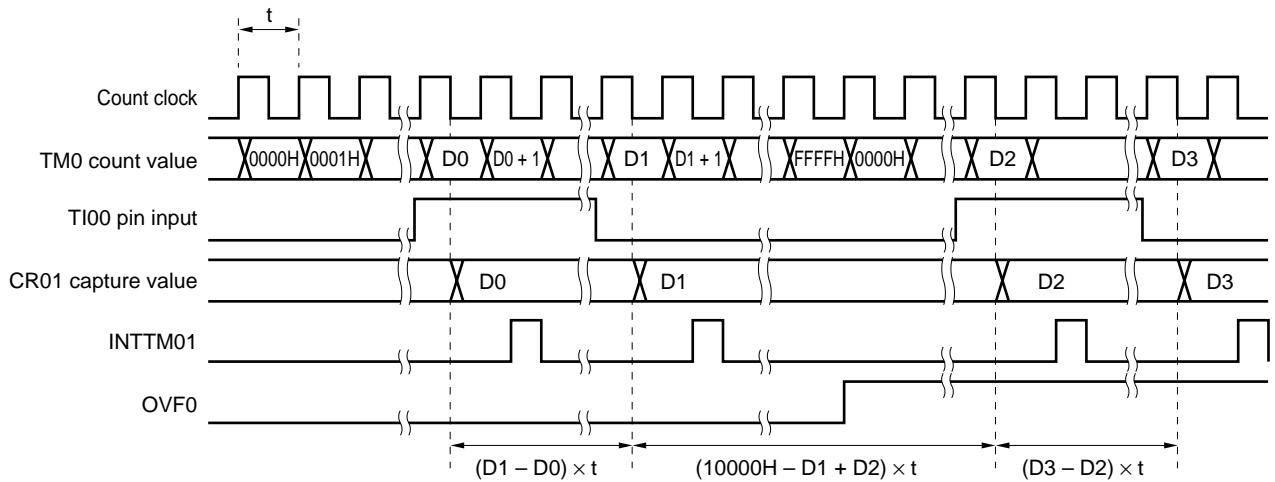

(2) Measurement of two pulse widths with free-running counter

When the 16-bit timer/counter 0 (TM0) is operated in free-running mode (see register settings in **Figure 8-14**), it is possible to simultaneously measure the pulse widths of the two signals input to the TI00/TO0/P70 pin and the TI01/P71 pin.


When the edge specified by bits 4 and 5 (ES00 and ES01) of prescaler mode register 0 (PRM0) is input to the TI00/TO0/P70 pin, the value of TM0 is taken into 16-bit timer capture/compare register 01 (CR01) and an interrupt request signal (INTTM01) is set.

Also, when the edge specified by bits 6 and 7 (ES10 and ES11) of PRM0 is input to the TI01/P71 pin, the value of TM0 is taken into 16-bit timer capture/compare register 00 (CR00) and an external interrupt request signal (INTTM00) is set.

Any of three edge can be selected—rising, falling, or both edges—as the valid edges for the TI00/TO0/P70 pin and the TI01/P71 pin specified by means of bits 4 and 5 (ES00 and ES01) and bits 6 and 7 (ES10 and ES11) of INTM0, respectively.

For valid edge detection of TI00/TO0/P70 and TI01/P71 pins, sampling is performed at the interval selected by means of the prescaler mode register 0 (PRM0), and a capture operation is only performed when a valid level is detected twice, thus eliminating noise with a short pulse width.

Figure 8-14. Control Register Settings for Measurement of Two Pulse Widths with Free-Running Counter

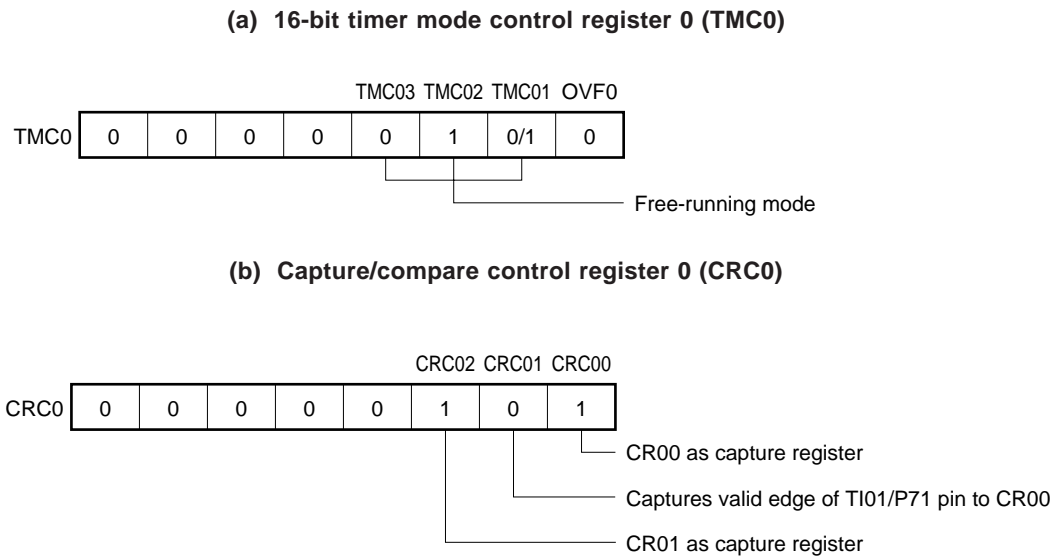

Remark 0/1: When these bits are reset to 0 or set to 1, the other functions can be used along with the pulse width measurement function. For details, see **Figure 8-2**.

- **Capture operation (Free-Running mode)**

Capture register operation in capture trigger input is shown.

Figure 8-15. Capture Operation with Rising Edge Specified


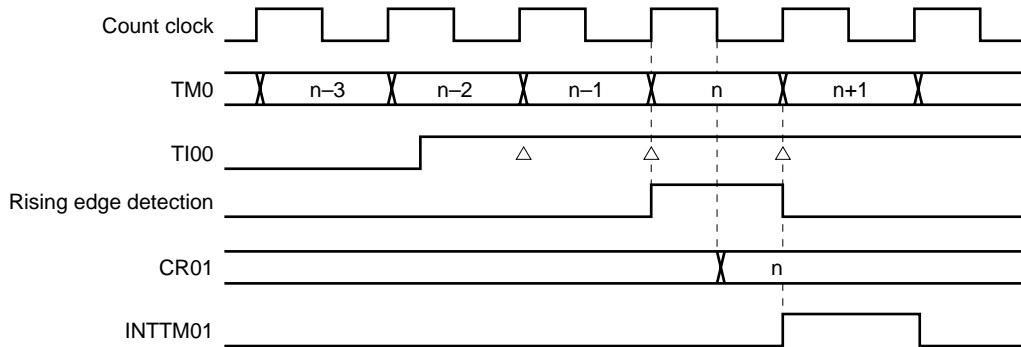


Figure 8-16. Timing of Pulse Width Measurement Operation with Free-Running Counter (with Both Edges Specified)

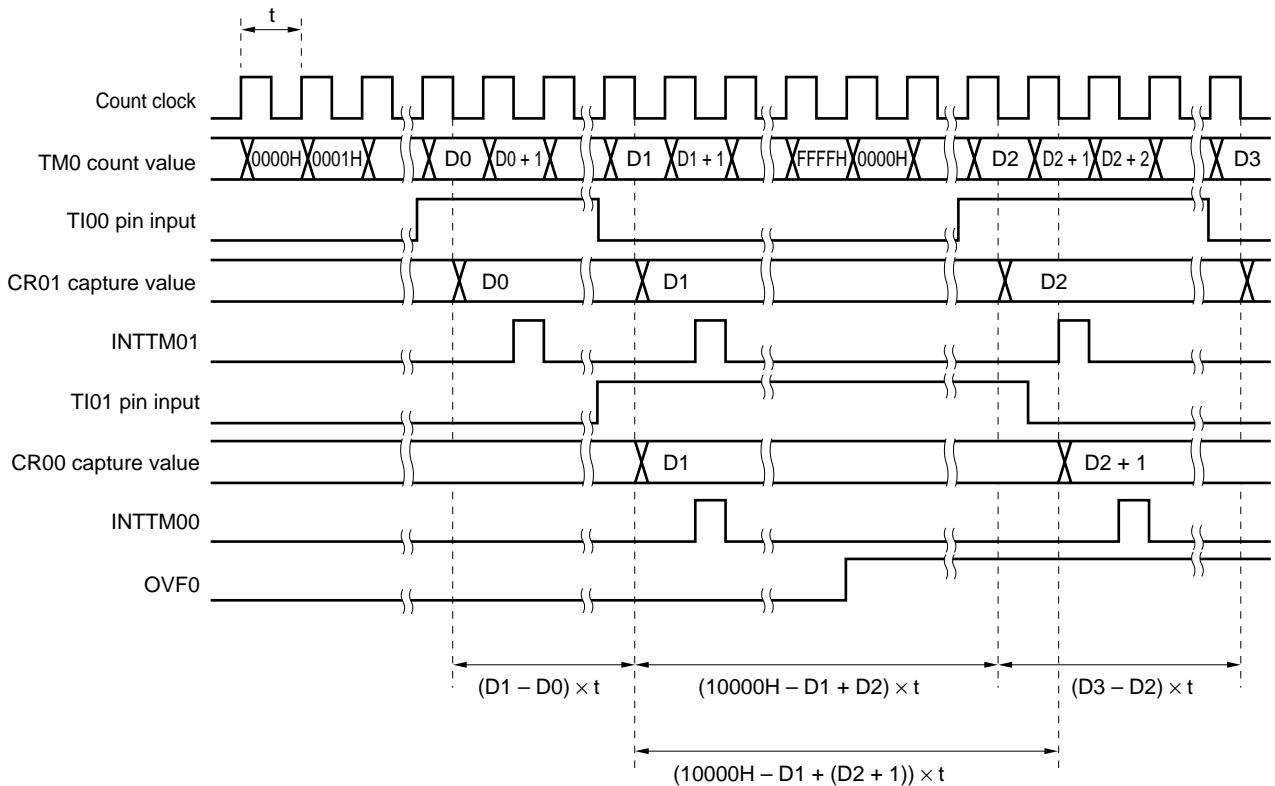

(3) Pulse width measurement with free-running counter and two capture registers

When the 16-bit timer/counter 0 (TM0) is operated in free-running mode (see register settings in **Figure 8-17**), it is possible to measure the pulse width of the signal input to the TI00//TO0/P70 pin.

When the edge specified by bits 4 and 5 (ES00 and ES01) of prescaler mode register 0 (PRM0) is input to the TI00//TO0/P70 pin, the value of TM0 is taken into 16-bit timer capture/compare register 01 (CR01) and an interrupt request signal (INTTM01) is set.


Also, on the inverse edge input of that of the capture operation into CR01, the value of TM0 is taken into 16-bit timer capture/compare register 00 (CR00).

Either of two edge can be selected—rising or falling—as the valid edges for the TI00//TO0/P70 pin specified by means of bits 4 and 5 (ES00 and ES01) of prescaler mode register 0 (PRM0).

For TI00//TO0/P70 pin valid edge detection, sampling is performed at the interval selected by means of the prescaler mode register (PRM0), and a capture operation is only performed when a valid level is detected twice, thus eliminating noise with a short pulse width.


Caution If the valid edge of TI00//TO0/P70 is specified to be both rising and falling edge, 16-bit timer capture/compare register 00 (CR00) cannot perform the capture operation.

Figure 8-17. Control Register Settings for Pulse Width Measurement with Free-Running Counter and Two Capture Registers

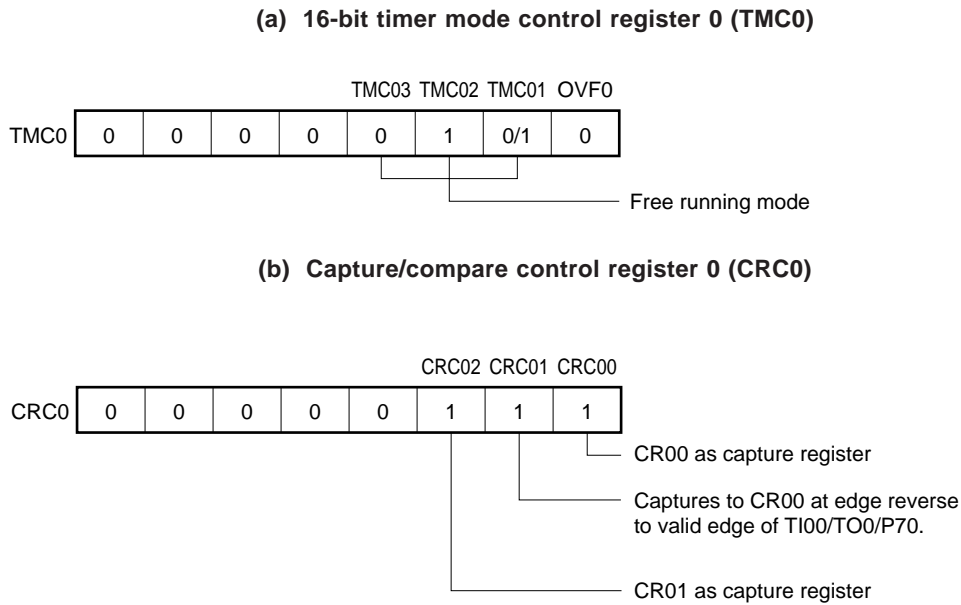

Remark 0/1: Setting 0 or 1 allows another function to be used simultaneously with pulse width measurement. See the description of the respective control registers for details.

Figure 8-18. Timing of Pulse Width Measurement Operation by Free-Running Counter and Two Capture Registers (with Rising Edge Specified)

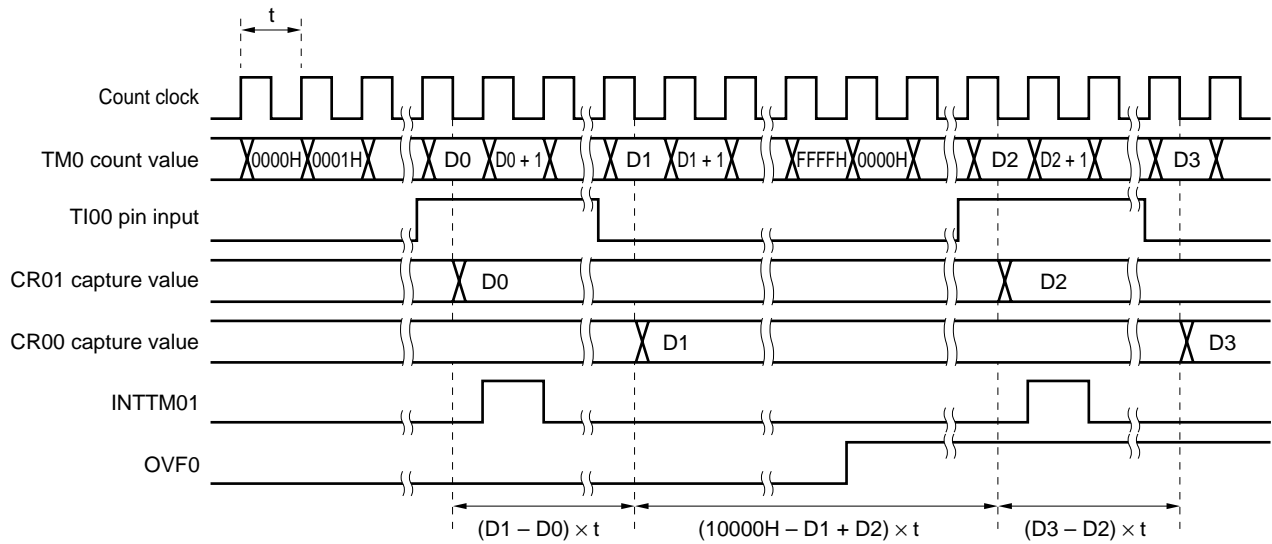

(4) Pulse width measurement by means of restart


When input of a valid edge to the TI00/TO0/P70 pin is detected, the count value of the 16-bit timer/counter 0 (TM0) is taken into 16-bit timer capture/compare register 01 (CR01), and then the pulse width of the signal input to the TI00/TO0/P70 pin is measured by clearing TM0 and restarting the count (see register settings in **Figure 8-19**).

The edge specification can be selected from two types, rising and falling edges by bits 4 and 5 (ES00 and ES01) of the prescaler mode register 0 (PRM0)

In a valid edge detection, the sampling is performed by a cycle selected by the prescaler mode resistor 0 (PRM0) and a capture operation is only performed when a valid level is detected twice, thus eliminating noise with a short pulse width.


Caution If the valid edge of TI00/TO0/P70 is specified to be both rising and falling edges, the 16-bit timer capture/compare register 00 (CR00) cannot perform the capture operation.

Figure 8-19. Control Register Settings for Pulse Width Measurement by Means of Restart

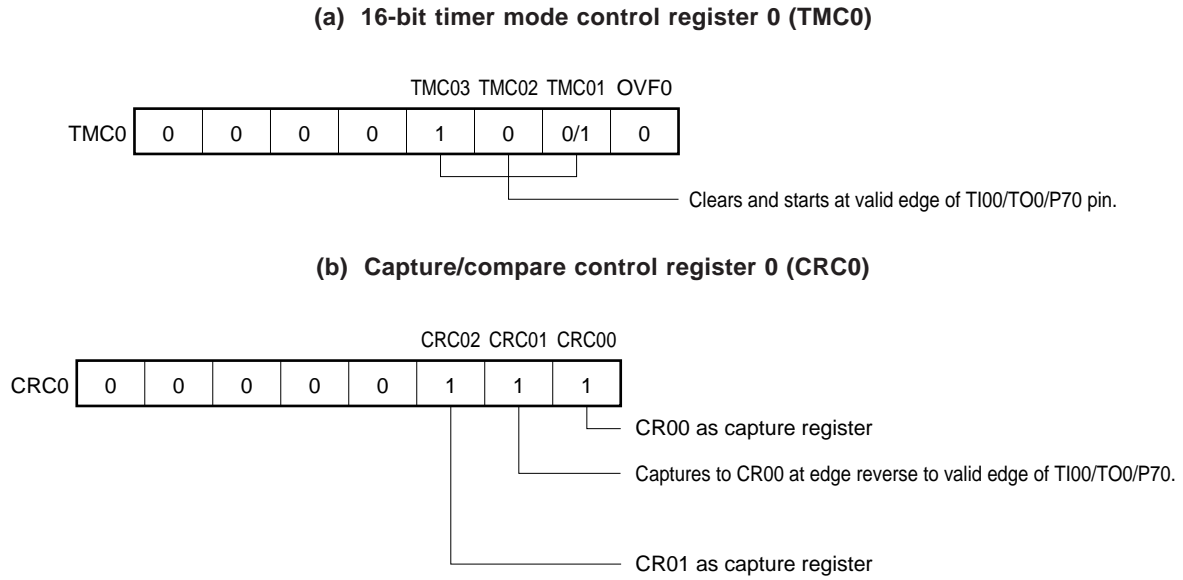

Remark 0/1: Setting 0 or 1 allows another function to be used simultaneously with pulse width measurement. See Figure 8-2.

Figure 8-20. Timing of Pulse Width Measurement Operation by Means of Restart (with Rising Edge Specified)

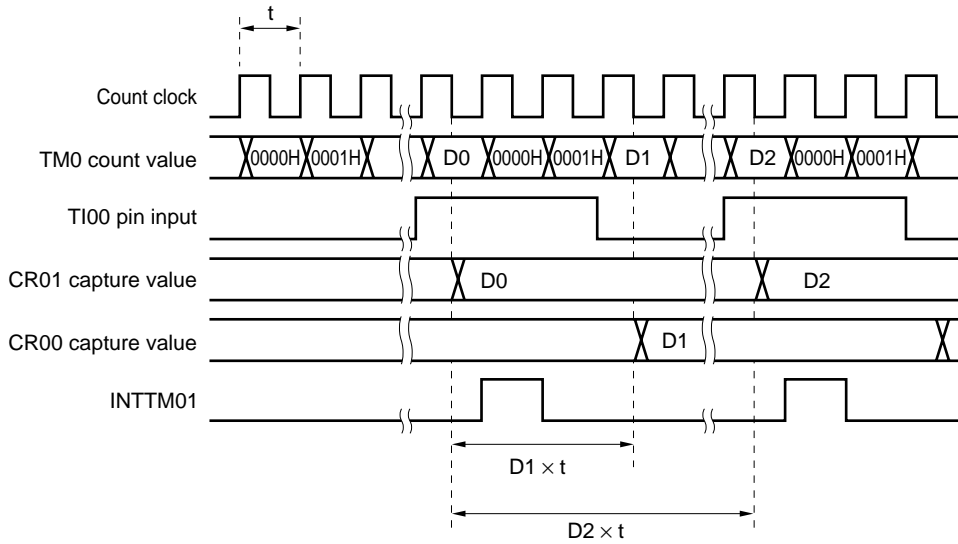

8.5.4 External event counter operation

The external event counter counts the number of external clock pulses to be input to the TI00/TO0/P70 pin with the 16-bit timer/counter 0 (TM0).

TM0 is incremented each time the valid edge specified with the prescaler mode register 0 (PRM0) is input.

When the TM0 counted value matches the 16-bit timer capture/compare register 00 (CR00) value, TM0 is cleared to 0 and the interrupt request signal (INTTM00) is generated.

Input the value except 0000H to CR00. (Count operation with a pulse cannot be carried out.)


The rising edge, the falling edge, or both edges can be selected with bits 4 and 5 (ES00 and ES01) of prescaler mode register 0 (PRM0).

Because operation is carried out only after the valid edge is detected twice by sampling with the internal clock ($f_x/2^3$), noise with short pulse widths can be removed.


Caution When used as an external event counter, the P70/TI00/TO0 pin cannot be used as timer output (TO0).

Figure 8-21. Control Register Settings in External Event Counter Mode

(a) 16-bit timer mode control register 0 (TMC0)

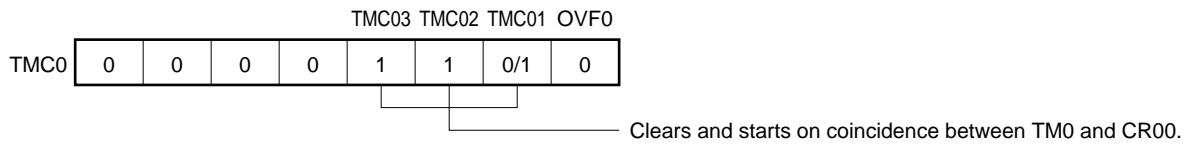

(b) Capture/compare control register 0 (CRC0)

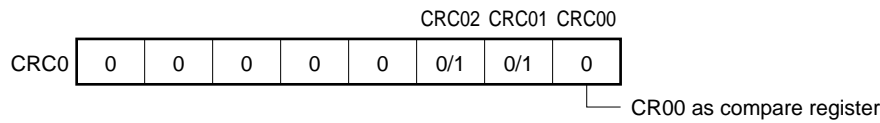

Remark 0/1: Setting 0 or 1 allows another function to be used simultaneously with the external event counter. See **Figures 8-2** and **8-3**.

Figure 8-22. External Event Counter Configuration Diagram


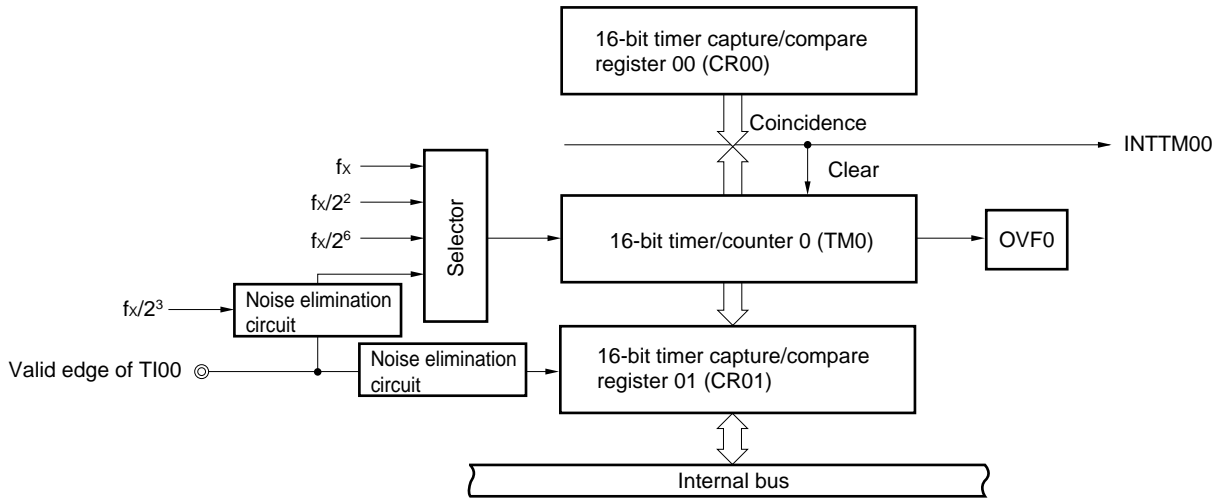


Figure 8-23. External Event Counter Operation Timings (with Rising Edge Specified)

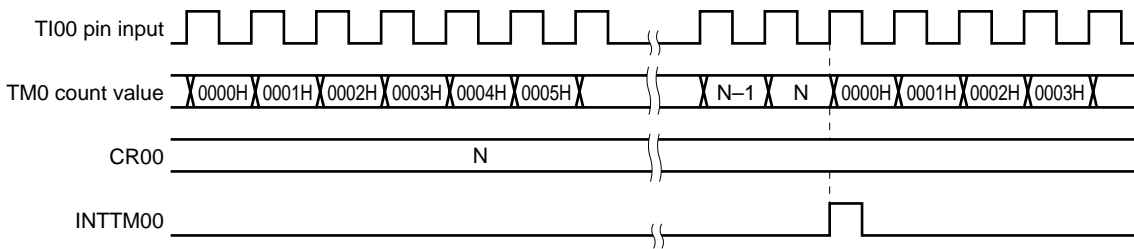

Caution When reading the external event counter count value, TM0 should be read.


8.5.5 Square-wave output operation

A square wave with any selected frequency to be output at intervals of the count value preset to the 16-bit timer capture/compare register 00 (CR00) operates.


The TO0 pin output status is reversed at intervals of the count value preset to CR00 by setting bit 0 (TOE0) and bit 1 (TOC01) of the 16-bit timer output control register 0 (TOC0) to 1. This enables a square wave with any selected frequency to be output.

Figure 8-24. Control Register Settings in Square-Wave Output Mode


(a) 16-bit timer mode control register 0 (TMC0)

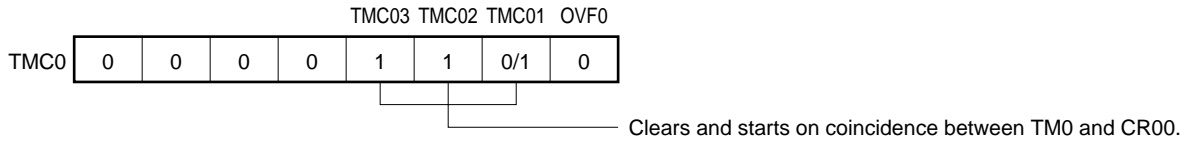

(b) Capture/compare control register 0 (CRC0)




(c) 16-bit timer output control register 0 (TOC0)

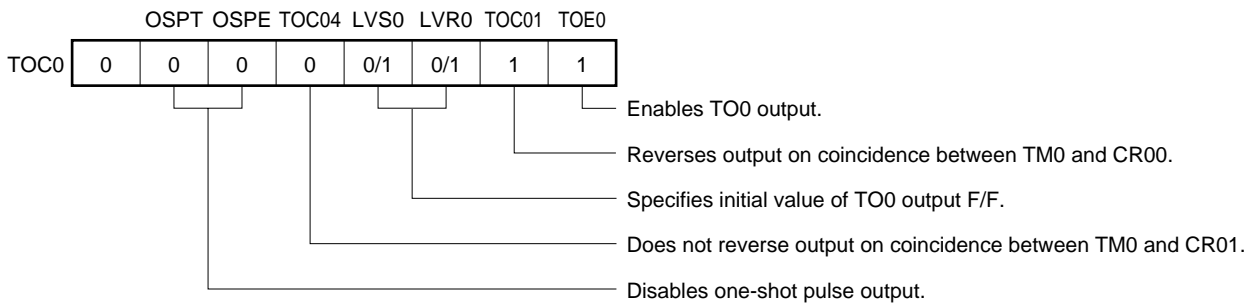

Remark 0/1: Setting 0 or 1 allows another function to be used simultaneously with square-wave output. See **Figures 8-2, 8-3, and 8-4.**

Figure 8-25. Square-Wave Output Operation Timing

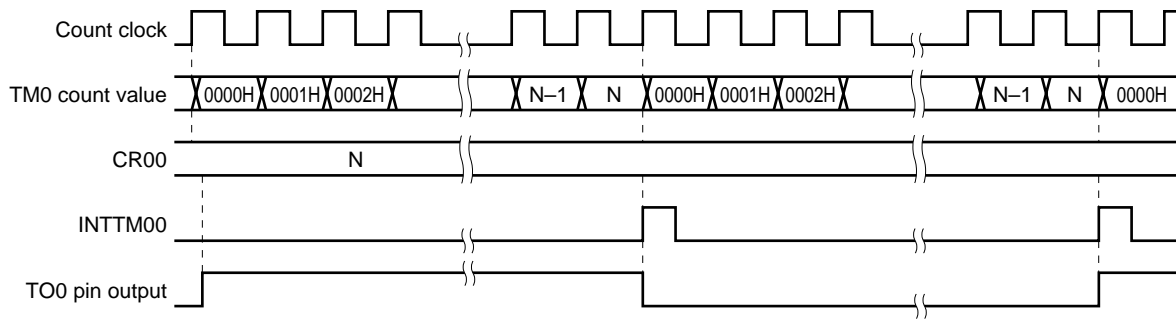

8.5.6 One-shot pulse output operation

It is possible to output one-shot pulses by software trigger.


If the 16-bit timer mode control register 0 (TMC0), capture/compare control register 0 (CRC0), and the 16-bit timer output control register 0 (TOC0) are set as shown in Figure 8-26, and 1 is set in bit 6 (OSPT) of TOC0 by software, a one-shot pulse is output from the TO0/TI00/P70 pin.

By setting 1 in OSPT, the 16-bit timer/counter 0 (TM0) is cleared and started, and output is activated by the count value set beforehand in 16-bit timer capture/compare register 01 (CR01). Thereafter, output is inactivated by the count value set beforehand in 16-bit timer capture/compare register 00 (CR00).

TM0 continues to operate after one-shot pulse is output. To stop TM0, 00H must be set to TMC0.

Caution When outputting one-shot pulse, do not set 1 in OSPT (bit 6 of 16-bit timer output control register 0 (TOC0)). When outputting one-shot pulse again, do so after the INTTM00, or interrupt match signal with CR00, is generated.

Figure 8-27. Timing of One-Shot Pulse Output Operation Using Software Trigger

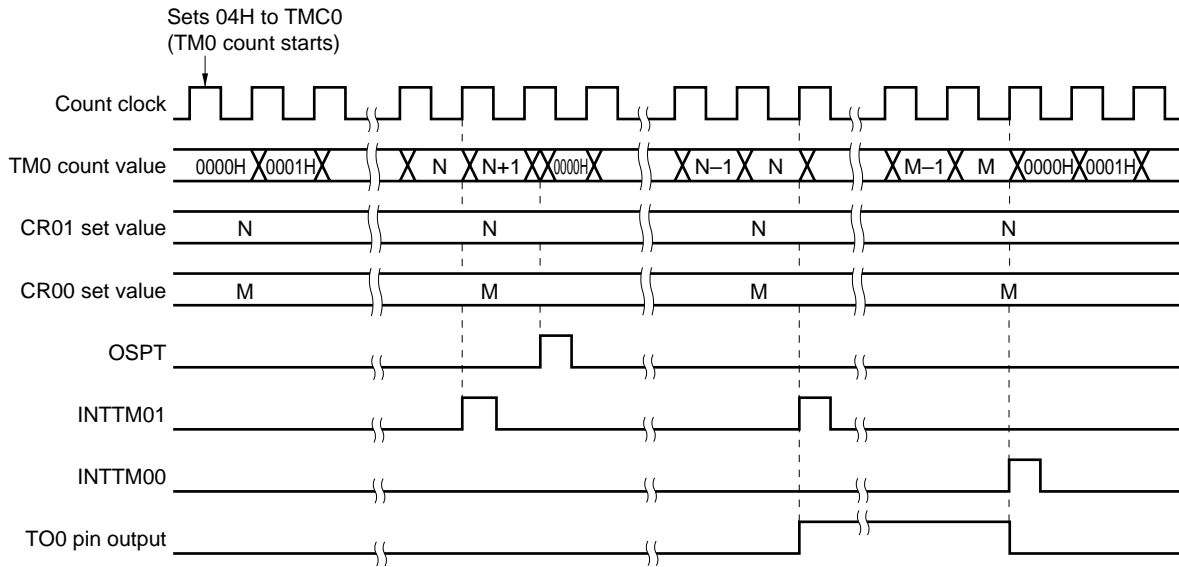


Caution The 16-bit timer/counter 0 (TM0) starts operation at the moment a value other than 0, 0 (operation stop mode) is set to TMC02 and TMC03, respectively.

8.6 16-Bit Timer/Event Counter Operating Precautions

(1) Timer start errors

An error with a maximum of one clock may occur concerning the time required for a match signal to be generated after timer start. This is because the 16-bit timer/counter 0 (TM0) is started asynchronously with the count clock.

Figure 8-28. 16-Bit Timer/Counter 0 (TM0) Start Timing

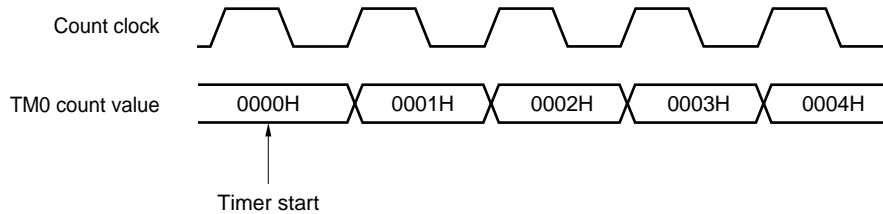


(2) 16-Bit timer compare register setting

Set other than 0000H to 16-bit timer capture/compare registers 00, 01 (CR00, CR01). This means 1-pulse count operation cannot be performed when it is used as the event counter.

(3) Operation after compare register change during timer count operation

If the value after the 16-bit timer capture/compare register 00 (CR00) is changed is smaller than that of the 16-bit timer register (TM0), TM0 continues counting, overflows and then restarts counting from 0. Thus, if the value (M) after CR00 change is smaller than that (N) before change, it is necessary to restart the timer after changing CR00.

Figure 8-29. Timings after Change of Compare Register during Timer Count Operation

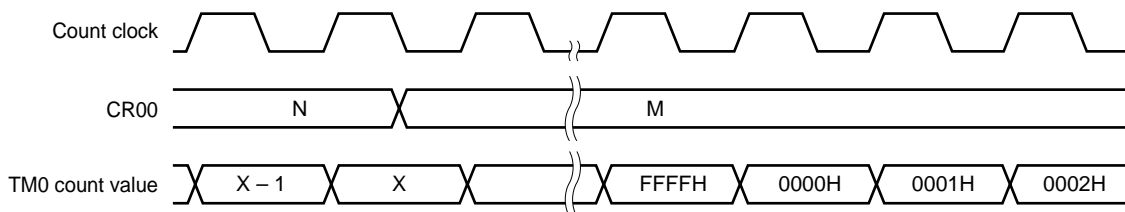


Remark $N > X > M$

(4) Capture register data retention timings

If the valid edge of the TI00/TO0/P70 pin is input during 16-bit timer capture/compare register 01 (CR01) read, CR01 holds data without carrying out capture operation. However, the interrupt request flag (TMIF01) is set upon detection of the valid edge.

Figure 8-30. Capture Register Data Retention Timing

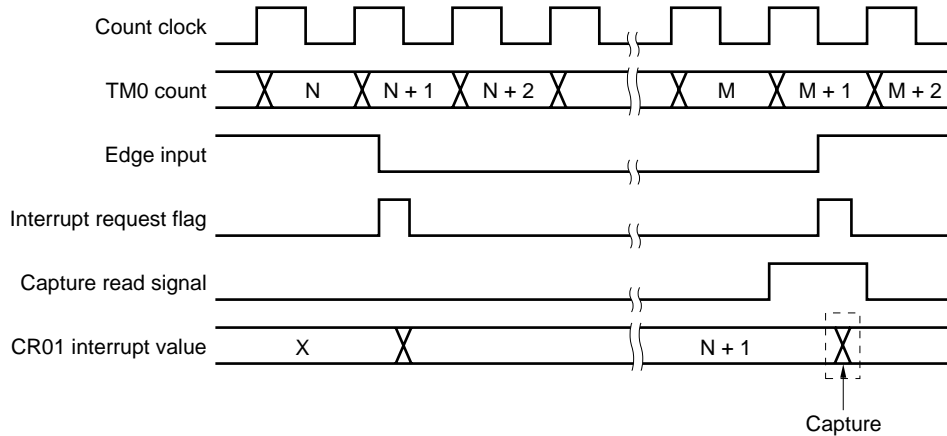**(5) Valid edge setting**

Set the valid edge of the TI00/TO0/P70 pin after setting bits 2 and 3 (TMC02 and TMC03) of the 16-bit timer mode control register 0 (TMC0) to 0, 0, respectively, and then stopping timer operation. Valid edge is set with bits 4 and 5 (ES00 and ES01) of the prescaler mode register 0 (PRM0).

(6) Output of one-shot pulse

- <1> When outputting one-shot pulse, do not set 1 in OSPT (bit 6 of 16-bit timer output control register 0 (TOC0)). When outputting one-shot pulse again, output it after the INTTM00, or interrupt request match signal with CR00, is generated.
- <2> Do not set OSPT to 1 in any mode other than one-shot pulse output.

(7) Operation of OVF0 flag

<1> OVF0 flag is set to 1 in the following case.

The clear & start mode on match between TM0 and CR00 is selected.


↓

CR00 is set to FFFFH.

↓

When TM0 is counted up from FFFFH to 0000H.

Figure 8-31. Operation Timing of OVF0 Flag

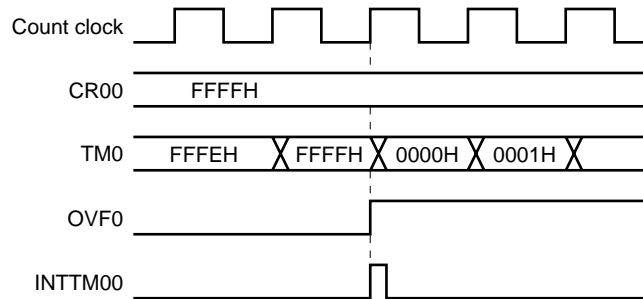

<2> Even if the OVF0 flag is cleared before the next count clock (before TM0 becomes 0001H) after the occurrence of TM0 overflow, the OVF0 flag is reset newly and clear is disabled.

(8) Contending operations

<1> The contending operation between the read time of 16-bit timer capture/compare register (CR00/CR01) and capture trigger input (CR00/CR01 used as capture/register)

Capture/trigger input is prior to the other. The data read from CR00/CR01 is not defined.

<2> The coincidence timing of contending operation between the write period of 16-bit timer capture/compare register (CR00/CR01) and 16-bit timer/counter 0 (TM0) (CR00/CR01 used as a compare register)

The coincidence discriminant is not performed normally. Do not write any data to CR00/CR01 near the coincidence timing.

(9) Timer operation

<1> Even if the 16-bit timer/counter 0 (TM0) is read, the value is not captured by 16-bit timer capture/compare register 01 (CR01).

<2> Regardless of the CPU's operation mode, when the timer stops, the input signals to pins TI00/TI01 are not acknowledged.

<3> One-shot pulse output operates normally only the free-running mode. In the clear & start mode by TM0 and CR00 match, no overflow occurs, and therefore one-shot pulse output is not possible.

(10) Capture operation

- <1> If TI00 is specified as the valid edge of the count clock, capture operation by the capture register specified as the trigger for TI00 is not possible.
- <2> If both the rising and falling edges are selected as the valid edges of TI00, capture is not performed.
- <3> To ensure the reliability of the capture operation, the capture trigger requires a pulse two times longer than the count clock selected by prescaler mode register 0 (PRM0).
- <4> The capture operation is performed at the fall of the count clock. An interrupt request input (INTTM0n), however, is generated at the rise of the next count clock.

(11) Compare operation

- <1> When the 16-bit timer capture/compare register (CR00/CR01) is overwritten during timer operation, match interrupt may be generated or clear operation may not be performed normally if that value is close to the timer value and larger than the timer value.
- <2> Capture operation may not be performed for CR00/CR01 set in compare mode even if a capture trigger has been input.

(12) Edge detection

- <1> If the TI00 pin or the TI01 pin is high level immediately after system reset and rising edge or both the rising and falling edges are specified as the valid edge for the TI00 pin or TI01 pin to enable the 16-bit timer/counter 0 (TM0) operation, a rising edge is detected immediately after. Be careful when pulling up the TI00 pin or the TI01 pin. However, the rising edge is not detected at restart after the operation has been stopped once.
- <2> The sampling clock used to remove noise differs when a TI00 valid edge is used as count clock and when it is used as a capture trigger. In the former case, the count clock is $f_x/2^3$, and in the latter case the count clock is selected by prescaler mode register 0 (PRM0). When a valid edge is detected twice by sampling, the capture operation is started, therefore noise with short pulse widths can be removed.

CHAPTER 9 8-BIT TIMER/EVENT COUNTER

9.1 8-Bit Timer/Event Counter Functions

8-bit timer/event counter (TM50, TM51) has the following two modes.

- Mode using 8-bit timer/event counters alone (individual mode)
- Mode using the cascade connection (16-bit resolution: cascade connection mode)

These two modes are described next.

(1) Mode using 8-bit timer/event counters alone (individual mode)

The timer operates as an 8-bit timer/event counter.

It has the following functions.

- Interval timer
- External event counter
- Square wave output
- PWM output

(2) Mode using the cascade connection (16-bit resolution: cascade connection mode)

The timer operates as a 16-bit timer/event counter by connecting in cascade.

It has the following functions.

- Interval timer with 16-bit resolution
- External event counter with 16-bit resolution
- Square wave output with 16-bit resolution

Figures 9-1 and 9-2 show 8-bit timer/event counter block diagrams.

Figure 9-1. 8-Bit Timer/Event Counter 50 Block Diagram


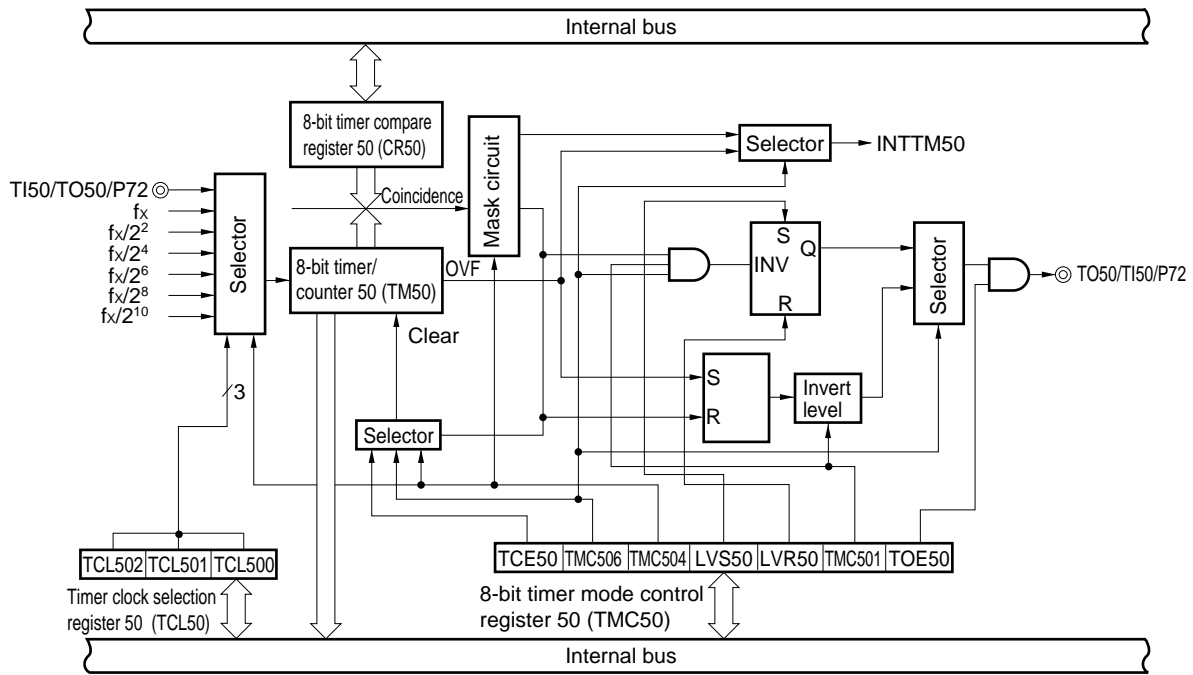


Figure 9-2. 8-Bit Timer/Event Counter 51 Block Diagram

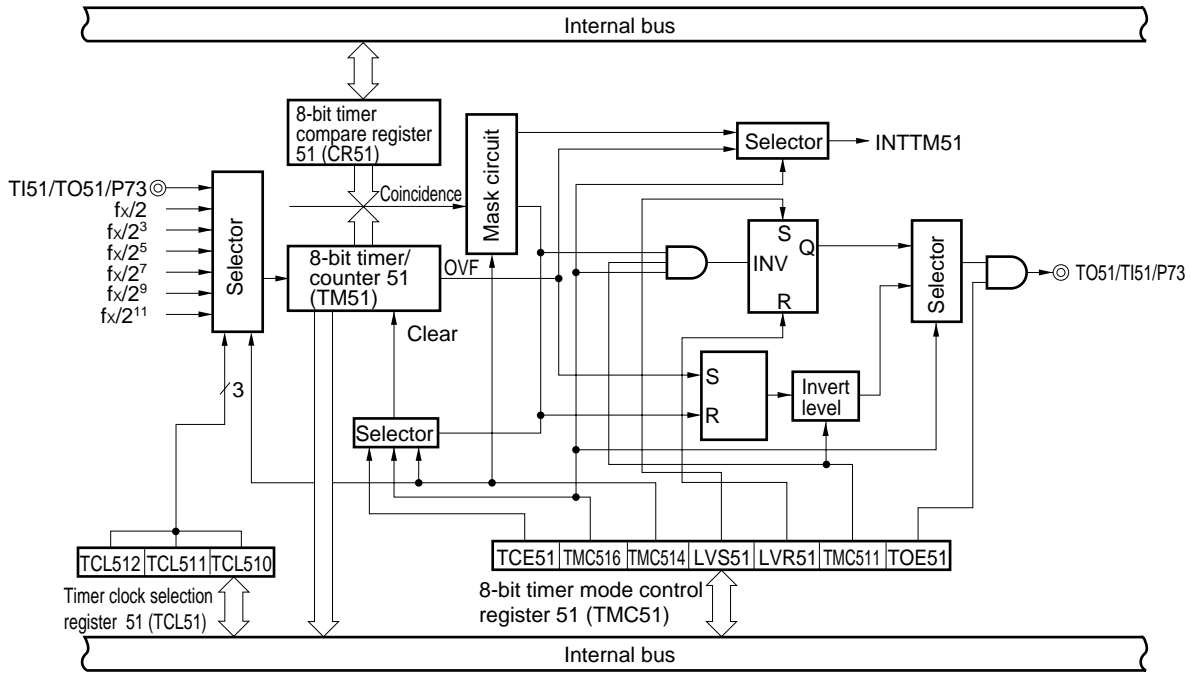

9.2 8-Bit Timer/Event Counter Configurations

8-bit timer/event counter consists of the following hardware.

Table 9-1. 8-Bit Timer/Event Counter Configuration

Item	Configuration
Timer register	8-bit timer/counter 5n (TM5n)
Register	8-bit timer compare register 5n (CR5n)
Timer output	2 (TO5n)
Control registers	Timer clock select register 5n (TCL5n) 8-bit timer mode control register 5n (TMC5n) Port mode register 7 (PM7) ^{Note}

Note See Figure 6-14 P70 to P75 Block Diagram.

Remark n = 0, 1

(1) 8-bit timer/counter 5n (TM5n: n = 0,1)

TM5n is an 8-bit read-only register which counts the count pulses.

When count clock starts, a counter is incremented. TM50 and TM51 can be connected in cascade and used as a 16-bit timer.

When TM50 and TM51 can be connected in cascade and used as a 16-bit timer, they can be read by a 16-bit memory operation instruction. However, since they are connected by an internal 8-bit bus, TM50 and TM51 are read separately in two times. Thus, take read during count change into consideration and compare them in two times reading. When count value is read during operation, count clock input is temporary stopped, and then the count value is read. In the following situations, count value is set to 00H.

<1> RESET input

<2> When TCE5n is cleared

<3> When TM5n and CR5n match in clear & start mode if this mode was entered upon match of TM5n and CR5n values.

Caution In cascade connection mode, the count value is reset to 00H when the lowest timer TCE5n is cleared.

Remark n = 0, 1

(2) 8-bit timer compare register 5n (CR5n: n = 0, 1)

When CR5n is used as a compare resistor, the value set in CR5n is constantly compared with the 8-bit timer/counter (TM5n) count value, and an interrupt request (INTTM5n) is generated if they match. (Except PWM mode). It is possible to rewrite the value of CR5n within 00H to FFH during count operation.

When TM50 and TM51 can be connected in cascade and used as a 16-bit timer, CR50 and CR51 operate as the 16-bit compare register. It compares count value with register value, and if the values are matched, interrupt request (INTTM50) are generated. INTTM51 interrupt request is also generated at this time. Thus, when TM50 and TM51 are used as cascade connection, mask INTTM51 interrupt request.

Caution In cascade connection mode, stop the timer operation before setting the data.

Remark n = 0, 1

9.3 Registers to Control 8-Bit Timer/Event Counter

The following three types of registers are used to control 8-bit timer/event counters.

- Timer clock select register 5n (TCL5n)
- 8-bit timer mode control register 5n (TMC5n)
- Port mode register 7 (PM7)

n = 0, 1

(1) Timer clock select register 5n (TCL5n: n = 0, 1)

This register sets count clocks of 8-bit timer/event counter 5n and the valid edge of TI50, TI51 input. TCL5n is set by an 8-bit memory manipulation instruction. RESET input sets to 00H.

Figure 9-3. Timer Clock Select Register 50 (TCL50) Format

Address: FF71H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
TCL50	0	0	0	0	0	TCL502	TCL501	TCL500

TCL502	TCL501	TCL500	Count Clock Selection
0	0	0	TI50 falling edge
0	0	1	TI50 rising edge
0	1	0	f_x (8.38 MHz)
0	1	1	$f_x/2^2$ (2.09 MHz)
1	0	0	$f_x/2^4$ (523 kHz)
1	0	1	$f_x/2^6$ (131 kHz)
1	1	0	$f_x/2^8$ (32.7 kHz)
1	1	1	$f_x/2^{10}$ (8.18 kHz)

- Cautions**
1. When rewriting TCL50 to other data, stop the timer operation beforehand.
 2. Be sure to set bits 3 through 7 to 0.

- Remarks**
1. When cascade connection is used, the settings of TCL5n0 to TCL5n2 (n = 0, 1) are valid only for the lowermost timer.
 2. f_x : Main system clock oscillation frequency
 3. Figures in parentheses are for operation with $f_x = 8.38$ MHz

Figure 9-4. Timer Clock Select Register 51 (TCL51) Format

Address: FF79H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
TCL51	0	0	0	0	0	TCL512	TCL511	TCL510

TCL512	TCL511	TCL510	Count Clock Selection
0	0	0	TI51 falling edge
0	0	1	TI51 rising edge
0	1	0	$f_x/2$ (4.19 MHz)
0	1	1	$f_x/2^3$ (1.04 MHz)
1	0	0	$f_x/2^5$ (261 kHz)
1	0	1	$f_x/2^7$ (65.4 kHz)
1	1	0	$f_x/2^9$ (16.3 kHz)
1	1	1	$f_x/2^{11}$ (4.09 kHz)

- Cautions**
1. When rewriting TCL51 to other data, stop the timer operation beforehand.
 2. Be sure to set bits 3 through 7 to 0.

- Remarks**
1. When cascade connection is used, the settings of TCL5n0 to TCL5n2 (n = 0, 1) are valid only for the lowermost timer.
 2. f_x : Main system clock oscillation frequency
 3. Figures in parentheses are for operation with $f_x = 8.38$ MHz

(2) 8-bit timer mode control register 5n (TMC5n: n = 0, 1)

TMC5n is a register which sets up the following six types.

- <1> 8-bit timer/counter 5n (TM5n) count operation control
- <2> 8-bit timer/counter 5n (TM5n) operating mode selection
- <3> Single mode/cascade connection mode selection
- <4> Timer output F/F (flip flop) status setting
- <5> Active level selection in timer F/F control or PWM (free-running) mode.
- <6> Timer output control

TMC5n is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets to 00H.

Figure 9-5 shows the TMC5n format.

Figure 9-5. 8-Bit Timer Mode Control Register 5n (TMC5n) Format

Address: FF70H (TMC50) FF78H (TMC51) After Reset: 00H R/W

Symbol 7 6 5 4 3 2 1 0

TMC5n	TCE5n	TMC5n6	0	TMC5n4	LVS5n	LVR5n	TMC5n1	TOE5n
-------	-------	--------	---	--------	-------	-------	--------	-------

TCE5n	TM5n Count Operation Control
0	After cleaning to 0, count operation disabled (prescaler disabled)
1	Count operation start

TMC5n6	TM5n Operating Mode Selection
0	Clear and start mode by matching between TM5n and CR5n
1	PWM (Free-running) mode

TMC5n4	Single Mode/Cascade Connection Mode Selection
0	Single mode (use the lowest timer)
1	Cascade connection mode (connect to lower timer)

LVS5n	LVR5n	Timer Output F/F Status Setting
0	0	No change
0	1	Timer output F/F reset (0)
1	0	Timer output F/F set (1)
1	1	Setting prohibited

TMC5n1	In Other Modes (TMC5n6 = 0)	In PWM Mode (TMC5n6 = 1)
	Timer F/F control	Active level selection
0	Inversion operation disabled	Active high
1	Inversion operation enabled	Active low

TOE5n	Timer Output Control
0	Output disabled (Port mode)
1	Output enabled

- Remarks**
1. In PWM mode, PWM output will be inactive because of TCE5n = 0.
 2. If LVS5n and LVR5n are read after data is set, 0 is read.
 3. n = 0, 1

(3) Port mode register 7 (PM7)

This register sets port 7 input/output in 1-bit units.

When using the P72/TO50/TI50 and P73/TI51/TO51 pins for timer output, set PM72, PM73, and output latches of P72 and P73 to 0.

PM7 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets PM7 to FFH.

Figure 9-6. Port Mode Register 7 (PM7) Format

Address: FF27H After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM7	1	1	PM75	PM74	PM73	PM72	PM71	PM70

PM7n	P7n Pin Input/Output Mode Selection (n = 0 to 5)
0	Output mode (output buffer ON)
1	Input mode (output buffer OFF)

9.4 8-Bit Timer/Event Counter Operations

9.4.1 8-bit interval timer operation

The 8-bit timer/event counters operate as interval timers which generate interrupt requests repeatedly at intervals of the count value preset to 8-bit timer compare registers 5n (CR5n).

When the count values of the 8-bit timer/counter 5n (TM5n) match the values set to CR5n, counting continues with the TM5n values cleared to 0 and the interrupt request signals (INTTM5n) are generated.

The count clock of the TM5n can be selected with bits 0 to 2 (TCL5n0 to TCL5n2) of the timer clock select register 5n (TCL5n).

See **9.5 8-Bit Timer/Event Counter Cautions (2) Operation after compare register transition during timer count operation** about the operation when the compare register value is changed during timer count operation.

[Setting]

<1> Set the registers.

- TCL5n : Select count clock.
- CR5n : Compare value
- TMC5n : Clear and Start mode by match of TM5n and CR5n.
(TMC5n = 0000xxx0B x = don't care)

<2> After TCE5n = 1 is set, count operation starts.


<3> If the values of TM5n and CR5n match, the timer output flip-flop inverts. Also, INTTM5n is generated and TM5n is cleared to 00H.

<4> INTTM5n generates repeatedly at the same interval.
Set TCE5n to 0 to stop count operation.

Remark n = 0, 1

Figure 9-7. Interval Timer Operation Timings (1/3)


(a) Basic operation

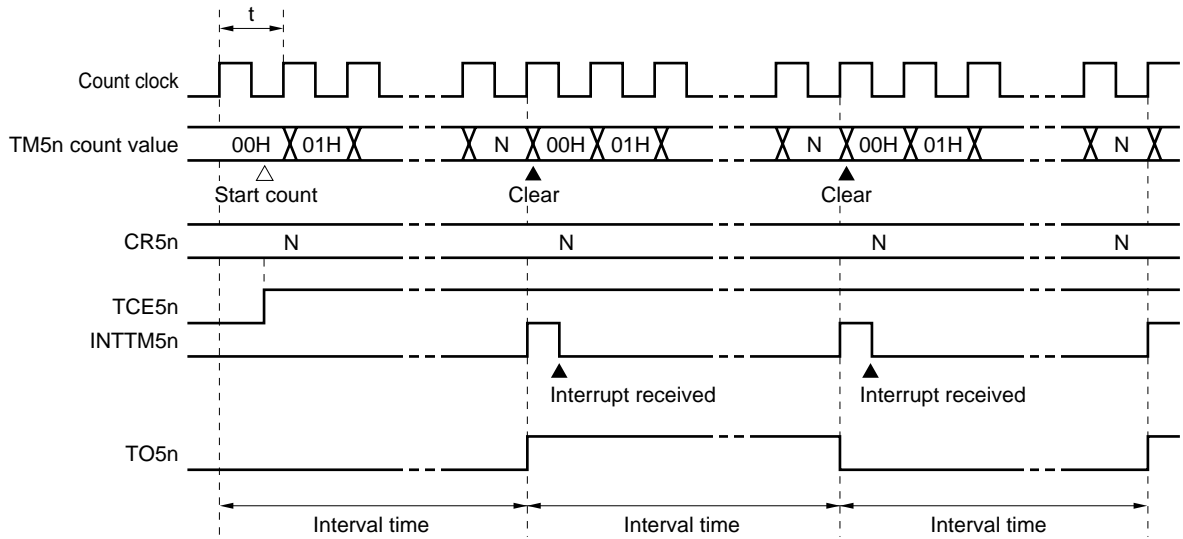


- Remarks**
1. Interval time = $(N + 1) \times t$: $N = 00H$ to FFH
 2. $n = 0, 1$

Figure 9-7. Interval Timer Operation Timings (2/3)

(b) When CR5n = 00H

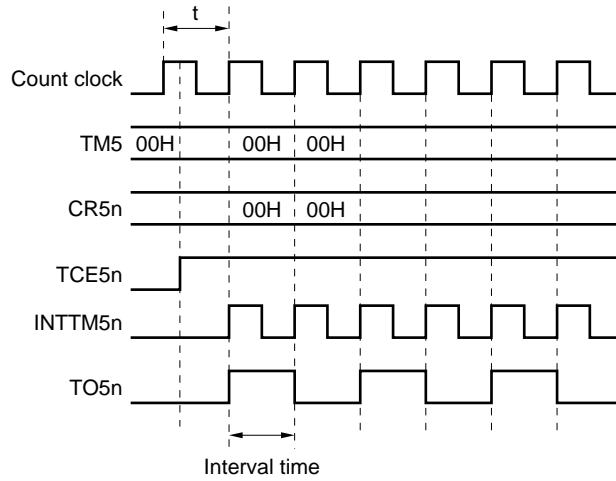


(c) When CR5n = FFH

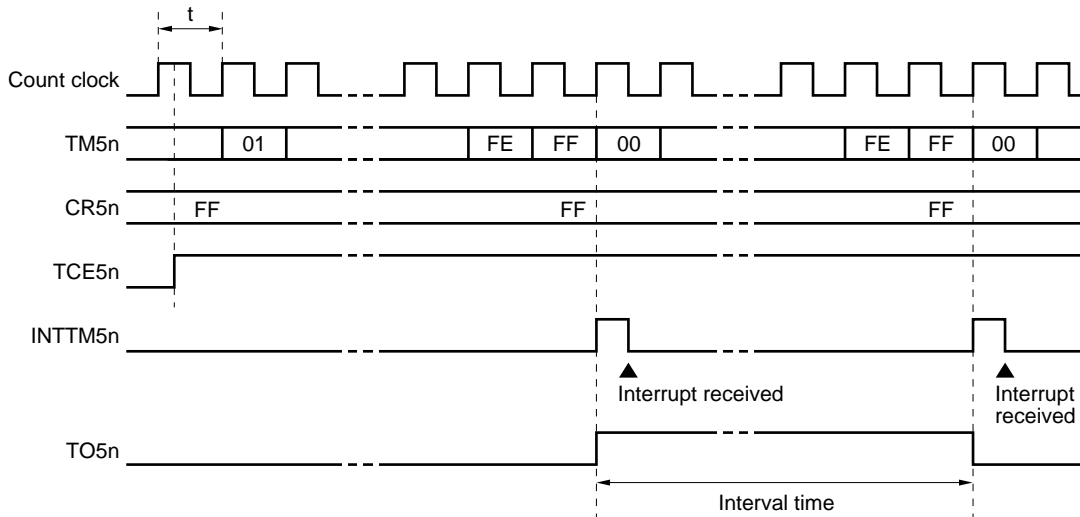


n = 0, 1

Figure 9-7. Interval Timer Operation Timings (3/3)

(d) Operated by CR5n transition ($M < N$)

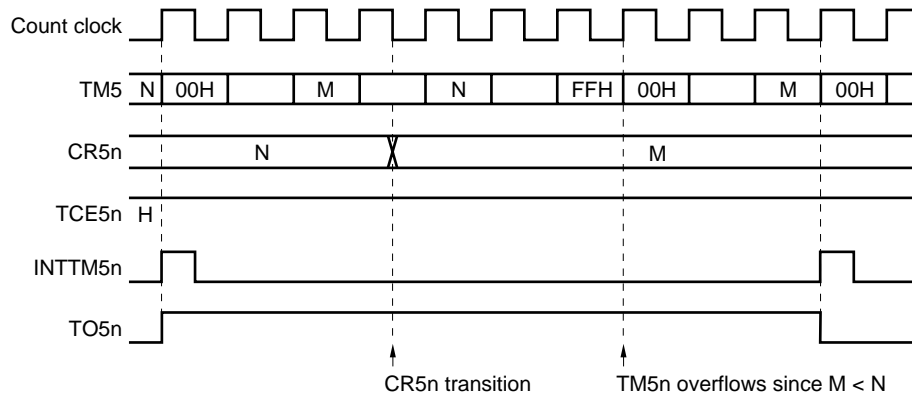

(e) Operated by CR5n transition ($M > N$)

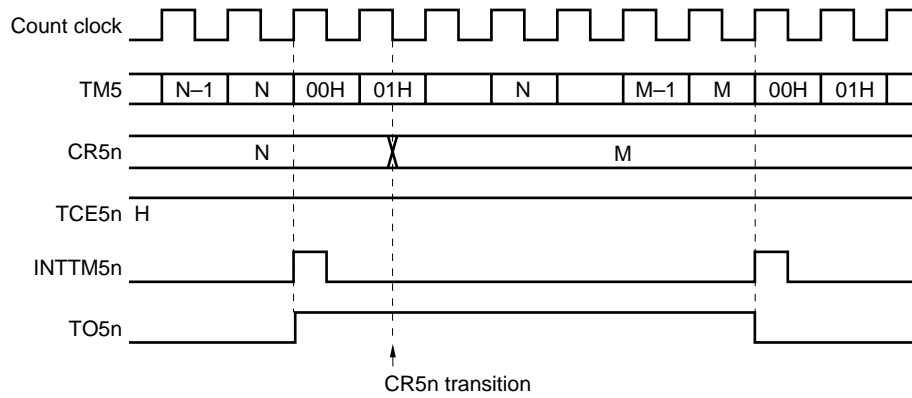

$n = 0, 1$

9.4.2 External event counter operation

The external event counter counts the number of external clock pulses to be input to the TI5n by the 8-bit timer/counter 5n (TM5n).


TM5n is incremented each time the valid edge specified with the timer clock select register 5n (TCL5n) is input. Either the rising or falling edge can be selected.

When the TM5n counted values match the values of 8-bit timer compare register 5n (CR5n), TM5n is cleared to 0 and the interrupt request signal (INTTM5n) are generated.

Whenever the TM5n counted value matches the value of CR5n, INTTM5n is generated.

Remark n = 0, 1

Figure 9-8. External Event Counter Operation Timing (with Rising Edge Specified)

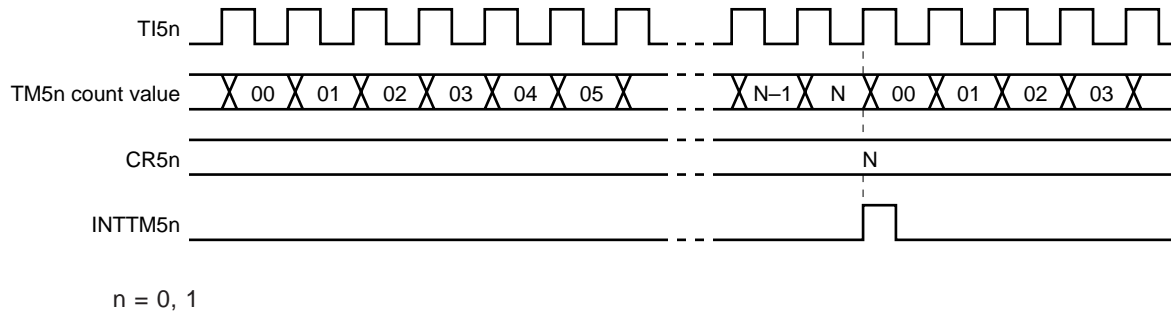

9.4.3 Square-wave output (8-bit resolution) operation

A square wave with any selected frequency is output at intervals of the value preset to the 8-bit timer compare register 5n (CR5n).

TO5n pin output status is reversed at intervals of the count value preset to CR5n by setting bit 0 (TOE5n) of 8-bit timer mode control register 5n (TMC5n) to 1. This enables a square wave with any selected frequency to be output (duty = 50%).

[Setting]

<1> Set each register

- Set port latch and port mode register to 0.
- TCL5n: Select count clock
- CR5n: Compared value
- TMC5n: Clear and Start mode by match of TM5n and CR5n

LVS5n	LVR5n	Timer Output F/F Status Setting
1	0	High-level output
0	1	Low-level output

Timer output F/F reverse enable
 Timer output enable → TOE5n = 1


<2> After TCE5n=1 is set, count operation starts

<3> Timer output F/F is reversed by match of TM5n and CR5n. After INTTM5n is generated, TM5n is cleared to 00H

<4> Timer output F/F is reversed at the same interval and square wave is output from TO5n

Remark n = 0,1

Figure 9-9. Square-Wave Output Operation Timing

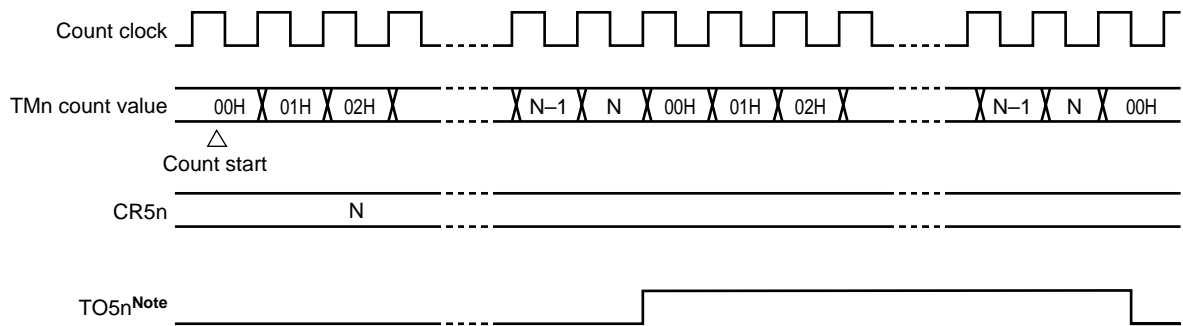

Note TO5n output initial value can be set by bits 2 and 3 (LVR5n, LVS5n) of the 8-bit timer mode control register 5n (TMC5n)

Remark n = 0,1

9.4.4 8-bit PWM output operation

8-bit timer/event counter operates as PWM output when bit 6 (TMC5n6) of 8-bit timer mode control register 5n (TMC5n) is set to 1.

The duty rate pulse determined by the value set to 8-bit timer compare register 5n (CR5n).

Set the active level width of PWM pulse to CR5n, and the active level can be selected with bit 1 of TMC5n (TMC5n1).

Count clock can be selected with bit 0 to 2 (TCL5n0 to TCL5n2) of timer clock select register 5n (TCL5n).

Enable/disable for PWM output can be selected with bit 0 of TMC5n (TOE5n).

Caution Rewrite of CR5n in PWM mode is allowed only once in a cycle.

Remark n = 0, 1

(1) PWM output basic operation

[Setting]

- <1> Set port latch (P72, 73) and port mode register 7 (PM72, PM73) to 0.
- <2> Set active level width with 8-bit timer compare register (CR5n).
- <3> Select count clock with timer clock select register 5n (TCL5n).
- <4> Set active level with bit 1 of TMC5n (TMC5n1).
- <5> Count operation starts when bit 7 of TMC5n is set to 1.
Set TCE5n to 0 to stop count operation.


[PWM output operation]

- <1> PWM output (output from TO5n) outputs inactive level after count operation starts until overflow is generated.
- <2> When overflow is generated, the active level set in <1> of setting is output.
The active level is output until CR5n matches the count value of 8-bit timer/counter 5n (TM5n).
- <3> After the CR5n matches the count value, PWM output outputs the inactive level again until overflow is generated.
- <4> Operations <2> and <3> are repeated until the count operation stops.
- <5> When the count operation is stopped with TCE5n = 0, PWM output comes to inactive level.


Remark n = 0, 1

Figure 9-10. PWM Output Operation Timing


(a) Basic operation (active level = H)

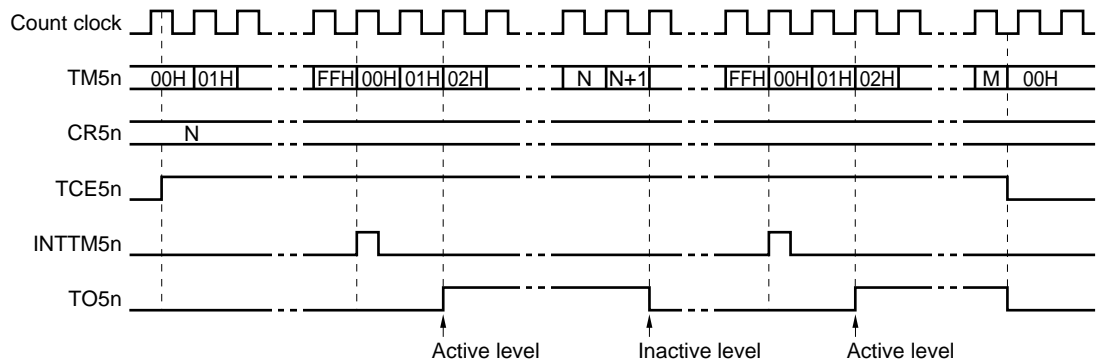

(b) CR5n = 0

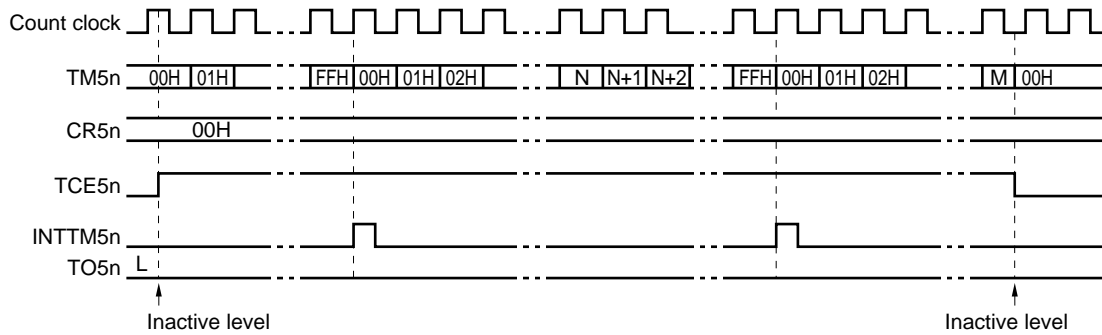

(c) CR5n = FFH

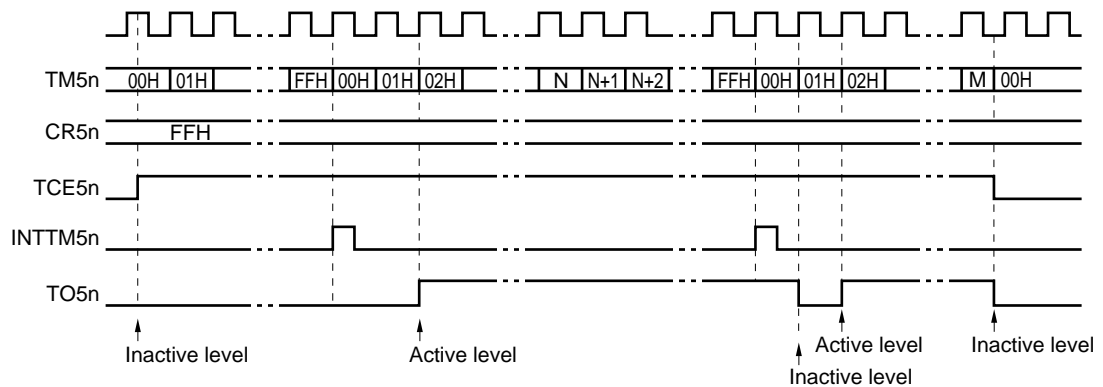


n = 0, 1


(2) Operated by CR5n transition

Figure 9-11. Timing of Operation by Change of CR5n


(a) CR5n value transits from N to M before overflow of TM5n

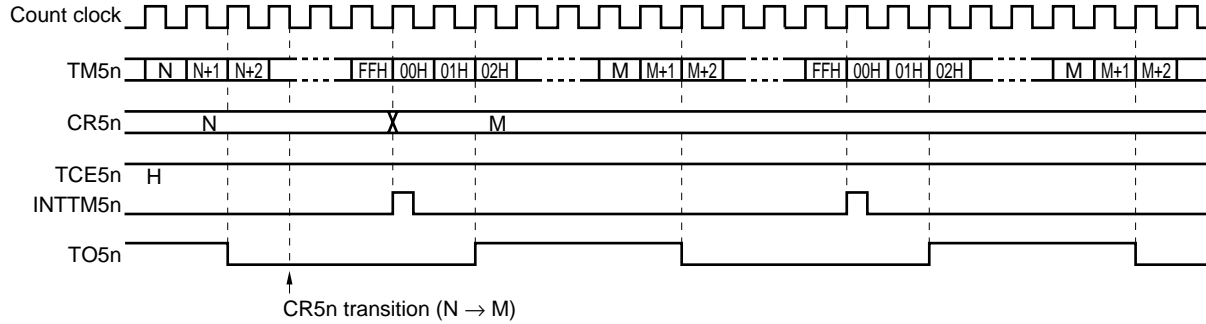

(b) CR5n value transits from N to M after overflow of TM5n

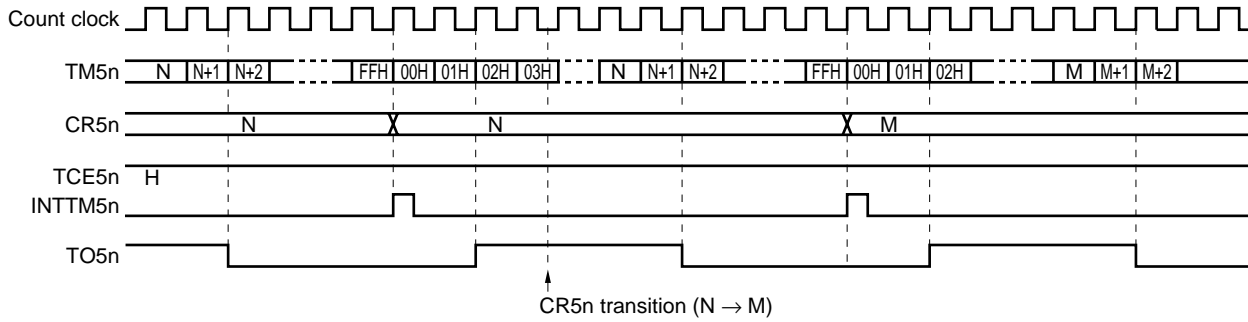

(c) CR5n value transits from N to M between two clocks (00H and 01H) after overflow of TM5n

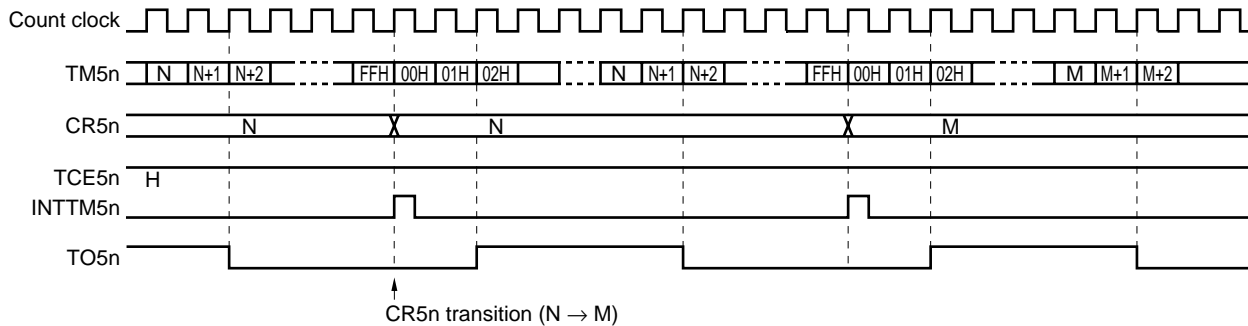

n = 0, 1

9.4.5 Interval timer (16-bit) operations

When "1" is set in bit 4 (TMC514) of 8-bit timer mode control register 51 (TMC51), the 16-bit resolution timer/counter mode is entered.

The 8-bit timer/event counter operates as an interval timer which generates interrupt requests repeatedly at intervals of the count value preset to the 8-bit timer compare registers (CR50, CR51).

[Setting]

<1> Set each register

TCL50 : Select count clock in TM50.

Cascade-connected TM51 need not be selected.

CR50, CR51 : Compared value (each value can be set at 00H-FFH)

TMC50, TMC51 : Select the clear & start mode by match of TM50 and CR50 (TM51 and CR51).

$\left\{ \begin{array}{l} \text{TM50} \rightarrow \text{TMC50} = 0000xxx0B \quad \times: \text{ don't care} \\ \text{TM51} \rightarrow \text{TMC51} = 0001xxx0B \quad \times: \text{ don't care} \end{array} \right\}$

<2> When TMC51 is set to TCE51 = 1 and then, TCE50 is set to TCE50 = 1, count operation starts.


<3> When the values of TM50 and CR50 of cascade-connected timer match, INTTM50 of TM50 is generated. (TM50 and TM51 are cleared to 00H)

<4> INTTM5n generates repeatedly at the same interval.

- Cautions**
1. Stop timer operation without fail before setting compare register (CR50, CR51).
 2. INTTM51 of TM51 is generated when TM51 count value matches CR51, even if cascade connection is used. Ensure to mask TM51 to prohibit interrupt.
 3. Set TCE50 and TCE51 in a sequential order of TM51 and TM50.
 4. Count restart/stop can only be controlled by setting TCE50 of TM50 to 1/0.

Figure 9-12 shows an example of 16-bit resolution cascade connection mode timing.

Figure 9-12. 16-Bit Resolution Cascade Connection Mode

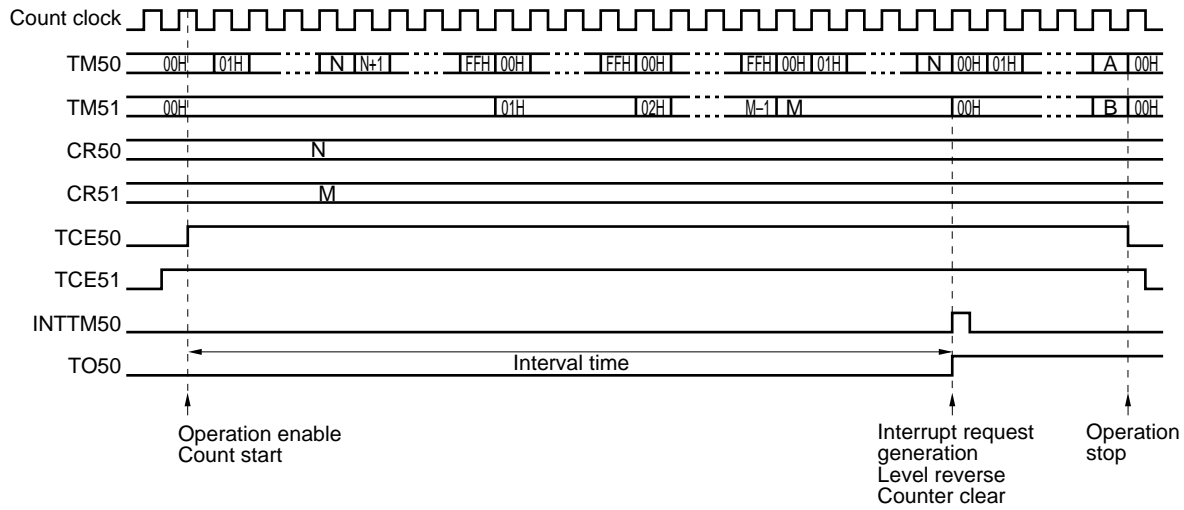


9.5 8-Bit Timer/Event Counter Cautions

(1) Timer start errors

An error with the maximum of one clock may occur concerning the time required for a match signal to be generated after timer start. This is because the 8-bit timer/counter 5n (TM5n) is started asynchronously with the count pulse.


Figure 9-13. 8-Bit Timer/Counter Start Timing

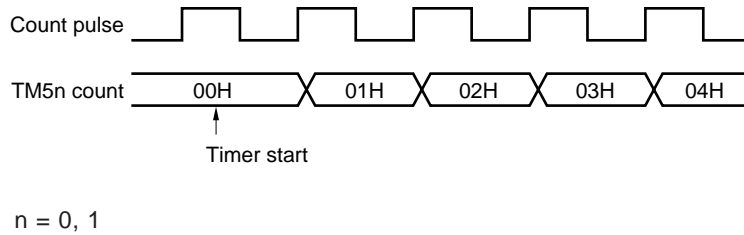

(2) Operation after compare register transition during timer count operation

If the values after the 8-bit timer compare register 5n (CR5n) is transmitted is smaller than the value of 8-bit timer/counter 5n (TM5n), TM5n continues counting, overflows and then restarts counting from 0. Thus, if the value (M) after CR5n is smaller than value (N) before transition, it is necessary to restart the timer after transitting CR5n.

Figure 9-14. Timing after Compare Register Transition during Timer Count Operation

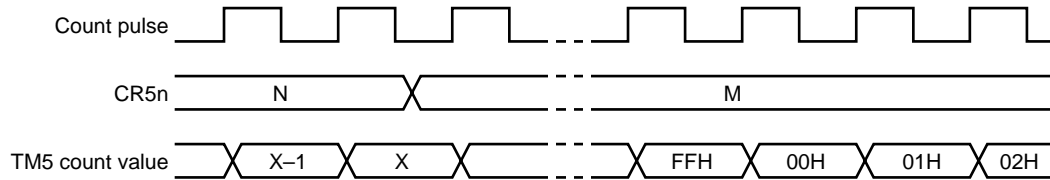

Caution Except when the TI5n input is selected, always set TCE5n = 0 before setting the stop state.

Remarks 1. $N > X > M$
2. $n = 0, 1$

(3) TM5n (n = 0, 1) reading during timer operation

When reading TM5n during operation, select count clock having high/low level wave form longer than two cycles of CPU clock because count clock stops temporary. For example, in the case where CPU clock (f_{CPU}) is f_x , when the selected count clock is $f_x/4$ or below, it can be read.

Remark $n = 0, 1$

[MEMO]

CHAPTER 10 WATCH TIMER

10.1 Watch Timer Functions


The watch timer has the following functions.

- Watch timer
- Interval timer

The watch timer and the interval timer can be used simultaneously.

Figure 10-1 shows the watch timer block diagram.

Figure 10-1. Watch Timer Block Diagram

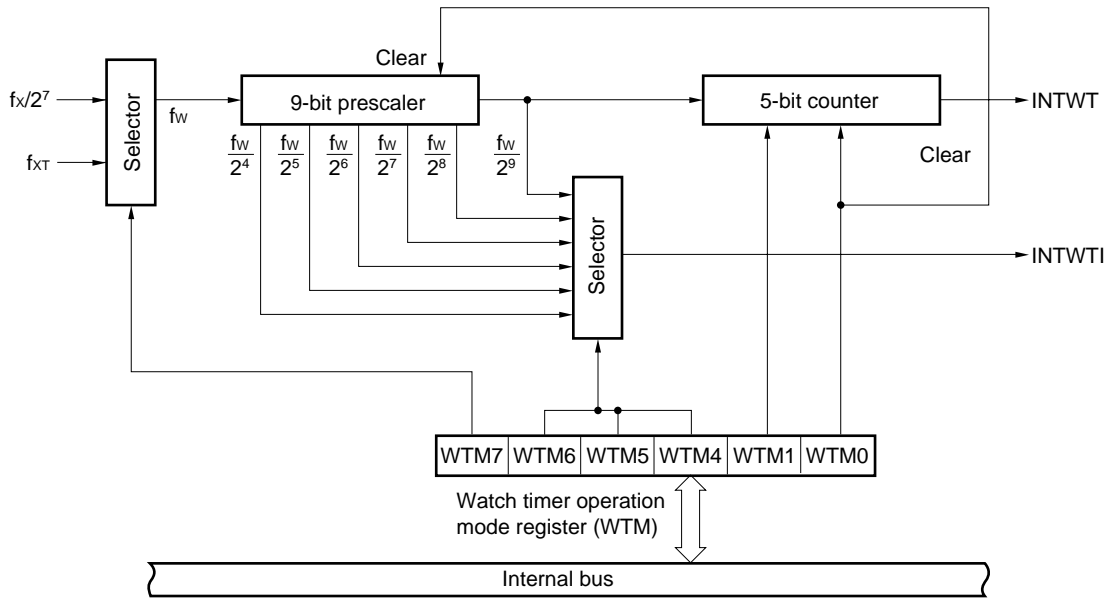

(1) Watch timer

When the main system clock or subsystem clock is used, interrupt requests (INTWT) are generated at 0.5 second or 0.25 second intervals.

(2) Interval timer

Interrupt requests (INTWTI) are generated at the preset time interval.

Table 10-1. Interval Timer Interval Time

Interval Time		When Operated at $f_x = 8.38 \text{ MHz}$	When Operated at $f_x = 4.19 \text{ MHz}$	When Operated at $f_{XT} = 32.768 \text{ kHz}$
$2^{11} \times 1/f_x$	$2^4 \times 1/f_{XT}$	244 μs	489 μs	488 μs
$2^{12} \times 1/f_x$	$2^5 \times 1/f_{XT}$	489 μs	978 μs	977 μs
$2^{13} \times 1/f_x$	$2^6 \times 1/f_{XT}$	978 μs	1.96 ms	1.95 ms
$2^{14} \times 1/f_x$	$2^7 \times 1/f_{XT}$	1.96 ms	3.91 ms	3.91 ms
$2^{15} \times 1/f_x$	$2^8 \times 1/f_{XT}$	3.91 ms	7.82 ms	7.81 ms
$2^{16} \times 1/f_x$	$2^9 \times 1/f_{XT}$	7.82 ms	15.6 ms	15.6 ms

Remark f_x : Main system clock oscillation frequency
 f_{XT} : Subsystem clock oscillation frequency

10.2 Watch Timer Configuration

The watch timer consists of the following hardware.

Table 10-2. Watch Timer Configuration

Item	Configuration
Counter	5 bits \times 1
Prescaler	9 bits \times 1
Control register	Watch timer operation mode register (WTM)

10.3 Register to Control Watch Timer

Watch timer operation mode register (WTM) is a register to control watch timer.

- **Watch timer operation mode register (WTM)**

This register sets the watch timer count clock, enables/disables operation, prescaler interval time, and 5-bit counter operation control.

WTM is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets WTM to 00H.

Figure 10-2. Watch Timer Operation Mode Register (WTM) Format

Address: FF41H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
WTM	WTM7	WTM6	WTM5	WTM4	0	0	WTM1	WTM0

WTM7	Watch Timer Count Clock Selection
0	$f_x/2^7$ (65.4 kHz)
1	f_{XT} (32.768 kHz)

WTM6	WTM5	WTM4	Prescaler Interval Time Selection
0	0	0	$2^4/f_w$
0	0	1	$2^5/f_w$
0	1	0	$2^6/f_w$
0	1	1	$2^7/f_w$
1	0	0	$2^8/f_w$
1	0	1	$2^9/f_w$
Other than above			Setting prohibited

WTM1	5-Bit Counter Operation Control
0	Clear after operation stop
1	Start

WTM0	Watch Timer Enables Operation
0	Operation stop (clear both prescaler and timer)
1	Operation enable

- Remarks**
1. f_w : Watch timer clock frequency ($f_x/2^7$ or f_{XT})
 2. f_x : Main system clock oscillation frequency
 3. f_{XT} : Subsystem clock oscillation frequency
 4. Figures in parentheses apply to operation with $f_x = 8.38$ MHz, $f_{XT} = 32.768$ kHz.

10.4 Watch Timer Operations

10.4.1 Watch timer operation

When the 32.768-kHz subsystem clock or 8.38-MHz main system clock is used, the timer operates as a watch timer with a 0.5-second or 0.25-second interval.

The watch timer generates an interrupt request (INTWT) at the constant time interval.

When bit 0 (WTM0) and bit 1 (WTM1) of the watch timer operation mode register (WTM) is set to 1, the 5-bit counter is cleared and the count operation stops.

When the interval timer is simultaneously operated, zero-second start can be achieved only for the watch timer by setting WTM1 to 0. In this case, however, the 9-bit prescaler is not cleared.

Therefore, an error up to $2^9 \times 1/f_w$ seconds occurs in the first overflow (INTWT) after zero-second start.

10.4.2 Interval timer operation

The watch timer operates as interval timer which generates interrupt requests (INTWTI) repeatedly at an interval of the preset count value.


The interval time can be selected with bits 4 to 6 (WTM4 to WTM6) of the watch timer operation mode register (WTM).

Table 10-3. Interval Timer Interval Time

WTM6	WTM5	WTM4	Interval Time	When Operated at $f_x = 8.38 \text{ MHz}$	When Operated at $f_x = 4.19 \text{ MHz}$	When Operated at $f_{XT} = 32.768 \text{ kHz}$
0	0	0	$2^4 \times 1/f_w$	244 μs	489 μs	488 μs
0	0	1	$2^5 \times 1/f_w$	489 μs	978 μs	977 μs
0	1	0	$2^6 \times 1/f_w$	978 μs	1.96 ms	1.95 ms
0	1	1	$2^7 \times 1/f_w$	1.96 ms	3.91 ms	3.91 ms
1	0	0	$2^8 \times 1/f_w$	3.91 ms	7.82 ms	7.81 ms
1	0	1	$2^9 \times 1/f_w$	7.82 ms	15.6 ms	15.6 ms
Other than above			Setting prohibited			

Remark f_x : Main system clock oscillation frequency
 f_{XT} : Subsystem clock oscillation frequency
 f_w : Watch timer clock frequency

Figure 10-3. Operation Timing of Watch Timer/Interval Timer

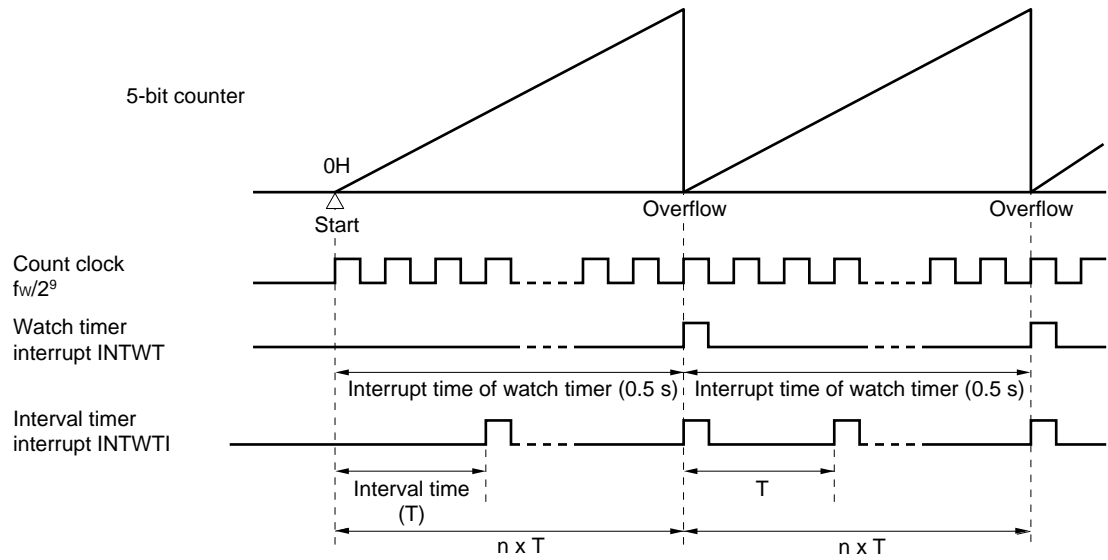

Remark f_w : Watch timer clock frequency
 n : The number of times of interval timer operations
 Figures in parentheses are for operation with $f_w = 32.768$ kHz

[MEMO]

CHAPTER 11 WATCHDOG TIMER

11.1 Watchdog Timer Functions


The watchdog timer has the following functions.

- Watchdog timer
- Interval timer
- Oscillation stabilization time selection

Caution Select the watchdog timer mode or the interval timer mode with the watchdog timer mode register (WDTM). (The watchdog timer and the interval timer cannot be used simultaneously.)

Figure 11-1 shows a block diagram of the watchdog timer.

Figure 11-1. Watchdog Timer Block Diagram

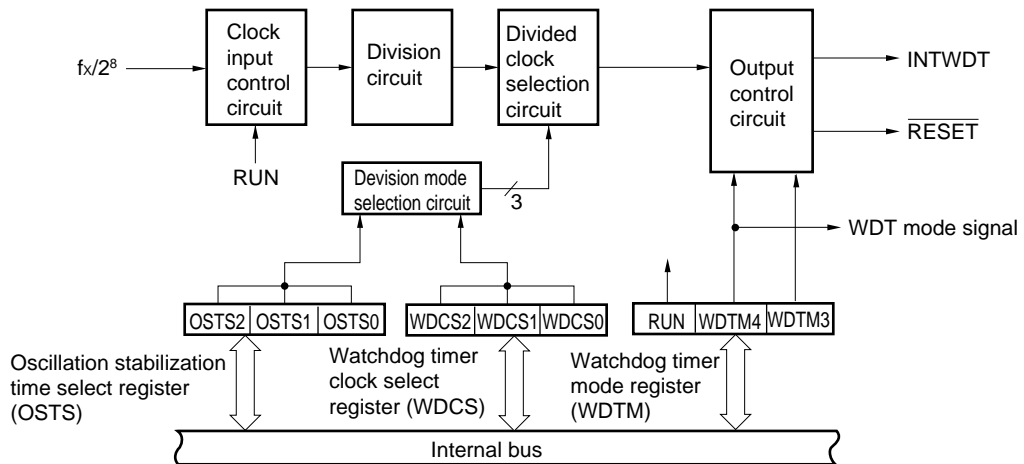

(1) Watchdog timer mode

A runaway is detected. Upon detection of the runaway, a non-maskable interrupt request or $\overline{\text{RESET}}$ can be generated.

Table 11-1. Watchdog Timer Runaway Detection Time

Runaway Detection Time
$2^{12} \times 1/f_x$ (489 μs)
$2^{13} \times 1/f_x$ (978 μs)
$2^{14} \times 1/f_x$ (1.96 ms)
$2^{15} \times 1/f_x$ (3.91 ms)
$2^{16} \times 1/f_x$ (7.82 ms)
$2^{17} \times 1/f_x$ (15.6 ms)
$2^{18} \times 1/f_x$ (31.3 ms)
$2^{20} \times 1/f_x$ (125 ms)

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz

(2) Interval timer mode

Interrupt requests are generated at the preset time intervals.

Table 11-2. Interval Time

Interval Time
$2^{12} \times 1/f_x$ (489 μs)
$2^{13} \times 1/f_x$ (978 μs)
$2^{14} \times 1/f_x$ (1.96 ms)
$2^{15} \times 1/f_x$ (3.91 ms)
$2^{16} \times 1/f_x$ (7.82 ms)
$2^{17} \times 1/f_x$ (15.6 ms)
$2^{18} \times 1/f_x$ (31.3 ms)
$2^{20} \times 1/f_x$ (125 ms)

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz

11.2 Watchdog Timer Configuration

The watchdog timer consists of the following hardware.

Table 11-3. Watchdog Timer Configuration

Item	Configuration
Control registers	Watchdog timer clock select register (WDCS) Watchdog timer mode register (WDTM) Oscillation stabilization time select register (OSTS)

11.3 Registers to Control the Watchdog Timer

The following three types of registers are used to control the watchdog timer.

- Watchdog timer clock select register (WDCS)
- Watchdog timer mode register (WDTM)
- Oscillation stabilization time select register (OSTS)

(1) Watchdog timer clock select register (WDCS)

This register sets overflow time of the watchdog timer and the interval timer.

WDCS is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets WDCS to 00H.

Figure 11-2. Watchdog Timer Clock Select Register (WDCS) Format

Address: FF42H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
WDCS	0	0	0	0	0	WDCS2	WDCS1	WDCS0

WDCS2	WDCS1	WDCS0	Overflow Time of Watchdog Timer/Interval Timer
0	0	0	$2^{12}/f_x$ (489 μs)
0	0	1	$2^{13}/f_x$ (978 μs)
0	1	0	$2^{14}/f_x$ (1.96 ms)
0	1	1	$2^{15}/f_x$ (3.91 ms)
1	0	0	$2^{16}/f_x$ (7.82 ms)
1	0	1	$2^{17}/f_x$ (15.6 ms)
1	1	0	$2^{18}/f_x$ (31.3 ms)
1	1	1	$2^{20}/f_x$ (125 ms)

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz

(2) Watchdog timer mode register (WDTM)

This register sets the watchdog timer operating mode and enables/disables counting. WDTM is set by a 1-bit or 8-bit memory manipulation instruction. $\overline{\text{RESET}}$ input sets WDTM to 00H.

Figure 11-3. Watchdog Timer Mode Register (WDTM) Format

Address: FFF9H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
WDTM	RUN	0	0	WDTM4	WDTM3	0	0	0

RUN	Watchdog Timer Operation Mode Selection ^{Note 1}
0	Count stop
1	Counter is cleared and counting starts

WDTM4	WDTM3	Watchdog Timer Operation Mode Selection ^{Note 2}
0	×	Interval timer mode ^{Note 3} (Maskable interrupt request occurs upon generation of an overflow)
1	0	Watchdog timer mode 1 (Non-maskable interrupt request occurs upon generation of an overflow)
1	1	Watchdog timer mode 2 (Reset operation is activated upon generation of an overflow)

- Notes**
- Once set to 1, RUN cannot be cleared to 0 by software. Thus, once counting starts, it can only be stopped by $\overline{\text{RESET}}$ input.
 - Once set to 1, WDTM3 and WDTM4 cannot be cleared to 0 by software.
 - The watchdog timer starts operations as the interval timer when 1 is set to RUN.

Caution When 1 is set to RUN so that the watchdog timer is cleared, the actual overflow time is up to 0.5% shorter than the time set by watchdog timer clock select register (WDCS).

Remark × : Don't care

(3) Oscillation stabilization time select register (OSTS)

A register to select oscillation stabilization time from reset time or STOP mode released time to the time when oscillation is stabilized.

OSTS is set by an 8-bit memory manipulation instruction.

By $\overline{\text{RESET}}$ input, it is turned into 04H. Thus, when releasing the STOP mode by $\overline{\text{RESET}}$ input, the time required to release is $2^{17}/f_x$.

Figure 11-4. Oscillation Stabilization Time Select Register (OSTS) Format

Address: FFFAH After Reset: 04H R/W

Symbol	7	6	5	4	3	2	1	0
OSTS	0	0	0	0	0	OSTS2	OSTS1	OSTS0

OSTS2	OSTS1	OSTS0	Selection of Oscillation Stabilization Time
0	0	0	$2^{12}/f_x$ (488 μs)
0	0	1	$2^{14}/f_x$ (1.95 ms)
0	1	0	$2^{15}/f_x$ (3.91 ms)
0	1	1	$2^{16}/f_x$ (7.81 ms)
1	0	0	$2^{17}/f_x$ (15.6 ms)
Other than the above			Setting prohibited

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz

11.4 Watchdog Timer Operations

11.4.1 Watchdog timer operation

When bit 4 (WDTM4) of the watchdog timer mode register (WDTM) is set to 1, the watchdog timer is operated to detect any runaway.

The runaway detection time interval is selected with bits 0 to 2 (WDCS0 to WDCS2) of the watchdog timer clock select register (WDCS).

Watchdog timer starts by setting bit 7 (RUN) of WDTM to 1. After the watchdog timer is started, set RUN to 1 within the set runaway time interval. The watchdog timer can be cleared and counting is started by setting RUN to 1. If RUN is not set to 1 and the runaway detection time is exceeded, system reset or a non-maskable interrupt request is generated according to WDTM bit 3 (WDTM3) value.

The watchdog timer continues operating in the HALT mode but it stops in the STOP mode. Thus, set RUN to 1 before the STOP mode is set, clear the watchdog timer and then execute the STOP instruction.

- Cautions**
1. The actual runaway detection time may be shorter than the set time by a maximum of 0.5%.
 2. When the subsystem clock is selected for CPU clock, watchdog timer count operation is stopped.

Table 11-4. Watchdog Timer Runaway Detection Time

Runaway Detection Time
$2^{12} \times 1/f_x$ (489 μ s)
$2^{13} \times 1/f_x$ (978 μ s)
$2^{14} \times 1/f_x$ (1.96 ms)
$2^{15} \times 1/f_x$ (3.91 ms)
$2^{16} \times 1/f_x$ (7.82 ms)
$2^{17} \times 1/f_x$ (15.6 ms)
$2^{18} \times 1/f_x$ (31.3 ms)
$2^{20} \times 1/f_x$ (125 ms)

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz.

11.4.2 Interval timer operation

The watchdog timer operates as an interval timer which generates interrupt requests repeatedly at an interval of the preset count value when bit 3 (WDTM3) and bit 4 (WDTM4) of the watchdog timer mode register (WDTM) are set to 1 and 0, respectively.

The interval time of interval timer is selected with bits 0 to 2 (WDCS0 to WDCS2) of the watchdog timer clock select register (WDCS). When 1 is set to bit 7 (RUN) of WDTM, the watchdog timer operates as the interval timer.

When the watchdog timer operated as the interval timer, the interrupt mask flag (WDTMK) and priority specify flag (WDTPR) are validated and the maskable interrupt request (INTWDT) can be generated. Among maskable interrupts, INTWDT has the highest priority at default.

The interval timer continues operating in the HALT mode but it stops in STOP mode. Thus, set RUN to 1 before the STOP mode is set, clear the interval timer and then execute the STOP instruction.

- Cautions**
1. Once bit 4 (WDTM4) of WDTM is set to 1 (this selects the watchdog timer mode), the interval timer mode is not set unless **RESET** input is applied.
 2. The interval time just after setting by WDTM may be shorter than the set time by a maximum of 0.5%.
 3. When the subsystem clock is selected for CPU clock, watchdog timer count operation is stopped.

Table 11-5. Interval Timer Interval Time

Interval Time
$2^{12} \times 1/f_x$ (489 μ s)
$2^{13} \times 1/f_x$ (978 μ s)
$2^{14} \times 1/f_x$ (1.96 ms)
$2^{15} \times 1/f_x$ (3.91 ms)
$2^{16} \times 1/f_x$ (7.82 ms)
$2^{17} \times 1/f_x$ (15.6 ms)
$2^{18} \times 1/f_x$ (31.3 ms)
$2^{20} \times 1/f_x$ (125 ms)

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz.

CHAPTER 12 CLOCK OUTPUT/BUZZER OUTPUT CONTROL CIRCUITS


12.1 Clock Output/Buzzer Output Control Circuit Functions

The clock output control circuit is intended for carrier output during remote controlled transmission and clock output for supply to peripheral LSIs. The clock selected with the clock output selection register (CKS) is output.

In addition, the buzzer output is intended for square wave output of buzzer frequency selected with CKS.

Figure 12-1 shows the block diagram of clock output/buzzer output control circuits.

Figure 12-1. Clock Output/Buzzer Output Control Circuit Block Diagram

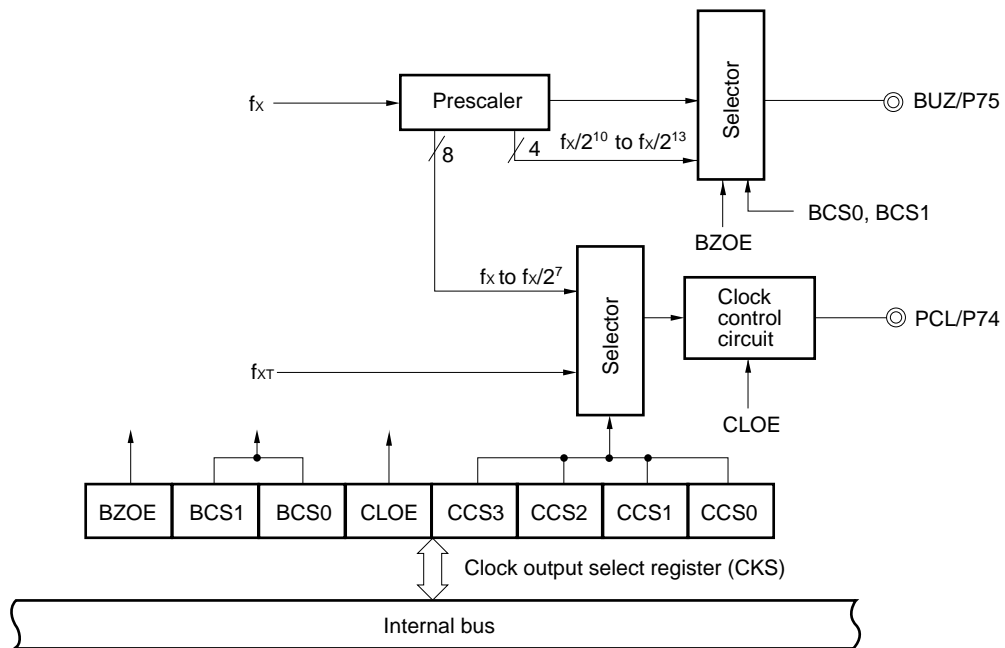

12.2 Clock Output/Buzzer Output Control Circuit Configuration

The clock output/buzzer output control circuits consists of the following hardware.

Table 12-1. Clock Output/Buzzer Output Control Circuits Configuration

Item	Configuration
Control registers	Clock output select register (CKS) Port mode register (PM7) ^{Note}

Note See Figure 6-14 P70 to P75 Block Diagram.

12.3 Register to Control Clock Output/Buzzer Output Control Circuit

The following two types of registers are used to control the clock output/buzzer output control circuits.

- Clock output select register (CKS)
- Port mode register (PM7)

(1) Clock output select register (CKS)

This register sets output enable/disable for clock output (PCL) and for the buzzer frequency output (BUZ), and sets the output clock.

CKS is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets CKS to 00H.

Figure 12-2. Clock Output Select Register (CKS) Format

Address: FF40H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
CKS	BZOE	BCS1	BCS0	CLOE	CCS3	CCS2	CCS1	CCS0

BZOE	BUZ Output Enable/Disable Specification
0	Stop clock division circuit operation. BUZ fixed to low level.
1	Enable clock division circuit operation. BUZ output enabled.

BCS1	BCS0	BUZ Output Clock Selection
0	0	$f_x/2^{10}$ (8.18 kHz)
0	1	$f_x/2^{11}$ (4.09 kHz)
1	0	$f_x/2^{12}$ (2.04 kHz)
1	1	$f_x/2^{13}$ (1.02 kHz)

CLOE	PCL Output Enable/Disable Setting
0	Stop clock division circuit operation. PCL fixed to low level
1	Enable clock division circuit operation. PCL output enabled.

CCS3	CCS2	CCS1	CCS0	PCL Output Clock Selection
0	0	0	0	f_x (8.38 MHz)
0	0	0	1	$f_x/2$ (4.19 MHz)
0	0	1	0	$f_x/2^2$ (2.09 MHz)
0	0	1	1	$f_x/2^3$ (1.04 MHz)
0	1	0	0	$f_x/2^4$ (524 kHz)
0	1	0	1	$f_x/2^5$ (262 kHz)
0	1	1	0	$f_x/2^6$ (131 kHz)
0	1	1	1	$f_x/2^7$ (65.5 kHz)
1	0	0	0	f_{XT} (32.768 kHz)
Other than above				Setting prohibited

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. f_{XT} : Subsystem clock oscillation frequency
 3. Figures in parentheses are for operation with $f_x = 8.38$ MHz.

(2) Port mode register (PM7)

This register sets port 7 input/output in 1-bit units.

When using the P74/PCL pin for clock output and the P75/BUZ pin for buzzer output, set PM74, PM75 and the output latch of P74, P75 to 0.

PM7 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets PM7 to FFH.

Figure 12-3. Port Mode Register 7 (PM7) Format

Address: FF27H After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PM7	1	1	PM75	PM74	PM73	PM72	PM71	PM70

PM7n	P7n Pin Input/Output Mode Selection (n = 0 to 5)
0	Output mode (output buffer ON)
1	Input mode (output buffer OFF)

12.4 Clock Output/Buzzer Output Control Circuit Operations

12.4.1 Operation as clock output

The clock pulse is output as the following procedure.

- <1> Select the clock pulse output frequency with bits 0 to 3 (CCS0 to CCS3) of the clock output select register (CKS) (clock pulse output in disabled status).
- <2> Set bit 4 (CLOE) of CKS to 1, and enable clock output.

Remark The clock output control circuit is designed not to output pulses with a small width during output enable/disable switching of the clock output. As shown in Figure 12-4, be sure to start output from the low period of the clock (marked with * in the figure). When stopping output, do so after securing high level of the clock.

Figure 12-4. Remote Control Output Application Example



12.4.2 Operation as buzzer output

The buzzer frequency is output as the following procedure.

- <1> Select the buzzer output frequency with bits 5 and 6 (BCS0, BCS1) of the clock output select register (CKS) (buzzer output in disabled status).
- <2> Set bit 7 (BZOE) of CKS to 1 to enable buzzer output.

[MEMO]

13.1 A/D Converter Functions

A/D converter is an 8-bit resolution converter that converts analog inputs into digital values. It can control up to 8 analog input channels (ANI0 to ANI7).

(1) Hardware start


Conversion is started by trigger input (ADTRG: rising edge, falling edge, or both rising and falling edges can be specified).

(2) Software start

Conversion is started by setting the A/D converter mode register 0 (ADM0).

Select one channel for analog input from ANI0 to ANI7 to perform A/D conversion. In the case of hardware start, A/D conversion stops when an A/D conversion operation ends and an interrupt request (INTAD0) is generated. In the case of software start, A/D conversion is repeated. Each time an A/D conversion operation ends, an interrupt request (INTAD0) is generated.

Figure 13-1. 8-Bit A/D Converter Block Diagram

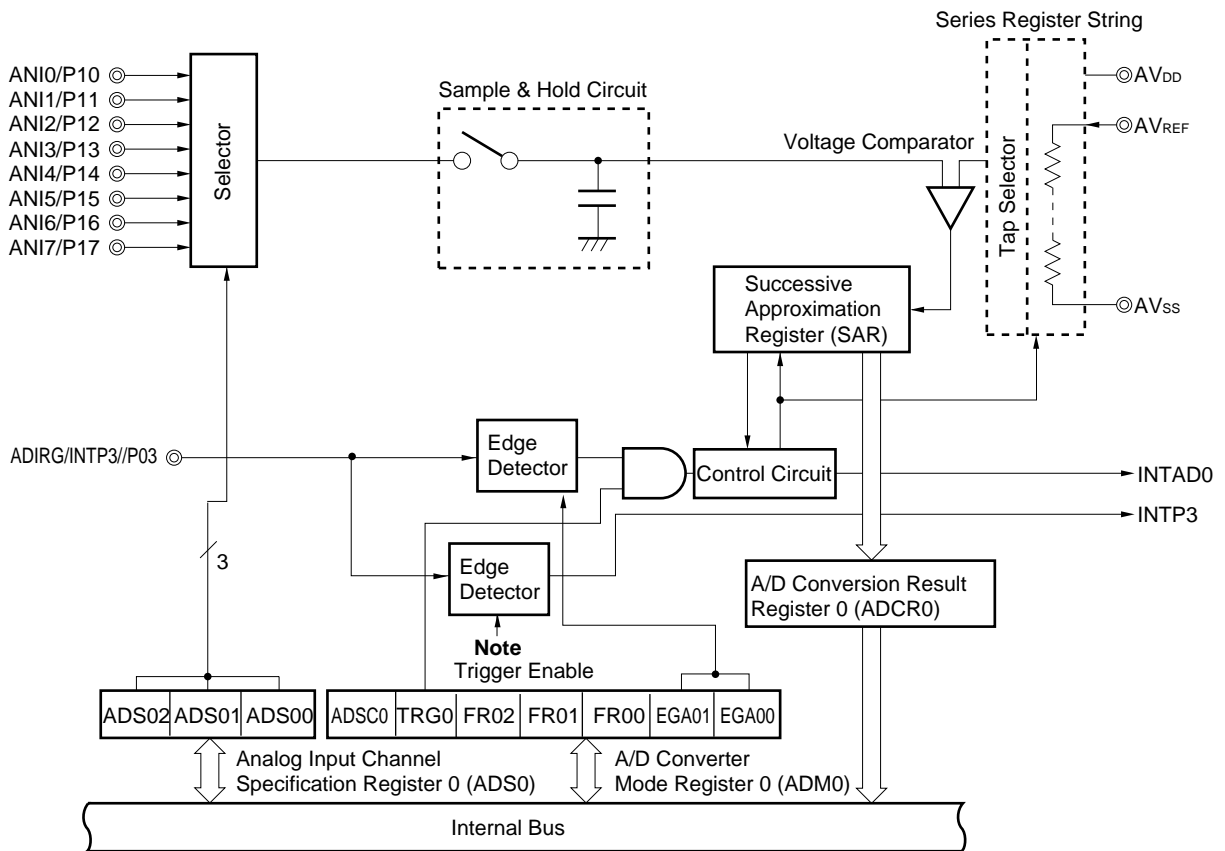

Note The effective edge is specified by bit 3 of the EGP and EGN registers (See Figure 19-5 External Interrupt Rising Edge Enable Register (EGP), External Interrupt Falling Edge Enable Register (EGN) Format.)

13.2 A/D Converter Configuration

The A/D converter consists of the following hardware.

Table 13-1. A/D Converter Configuration

Item	Configuration
Analog input	8 channels (ANI0 to ANI7)
Registers	Successive approximation register (SAR) A/D conversion result register 0 (ADCR0)
Control registers	A/D converter mode register 0 (ADM0) Analog input channel specification register 0 (ADS0) External interrupt rising edge enable register (EGP) External interrupt falling edge enable register (EGN)

(1) Successive approximation register (SAR)

This register compares the analog input voltage value to the voltage tap (compare value) value applied from the series resistor string, and holds the result from the most significant bit (MSB).

When up to the least significant bit (LSB) is held (end of A/D conversion), the SAR contents are transferred to the A/D conversion result register 0 (ADCR0).

(2) A/D conversion result register 0 (ADCR0)

The ADCR0 is an 8-bit register that stores the A/D conversion result. Each time A/D conversion ends, the conversion result is loaded from the successive approximation register.

ADCR0 is read by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ADCR0 to 00H.

Caution When writing is performed to the A/D converter mode register 0 (ADM0) and analog input channel specification register 0 (ADS0), the contents of ADCR0 may become undefined. Read the conversion result following conversion completion before writing to ADM0, ADS0. Using a timing other than the above may cause an incorrect conversion result to be read.

(3) Sample & hold circuit

The sample & hold circuit samples each analog input signal sequentially applied from the input circuit, and sends it to the voltage comparator. This circuit holds the sampled analog input voltage value during A/D conversion.

(4) Voltage comparator

The voltage comparator compares the analog input to the series resistor string output voltage.

(5) Series resistor string

The series resistor string is connected between AV_{REF} and AV_{SS} , and generates a voltage to be compared to the analog input.

(6) ANI0 to ANI7 pins

These are eight analog input pins to input analog signals to undergo A/D conversion to the A/D converter. ANI0 to ANI7 are alternate-function pins that can also be used for digital input.

- Cautions**
- 1. Use ANI0 to ANI7 input voltages within the specification range. If a voltage higher than AV_{REF} or lower than AV_{SS} is applied (even if within the absolute maximum rating range), the conversion value of that channel will be undefined and the conversion values of other channels may also be affected.**
 - 2. Analog input (ANI0 to ANI7) pins are alternate function pins that can also be used as input port (P10 to P17) pins. When A/D conversion is performed by selecting any one of ANI0 through ANI7, do not execute any input instruction to port 1 during conversion. It may cause the lower conversion resolution.**
When a digital pulse is applied to a pin adjacent to the pin in the process of A/D conversion, A/D conversion values may not be obtained as expected due to coupling noise. Thus, do not apply any pulse to a pin adjacent to the pin in the process of A/D conversion.

(7) AV_{REF} pin

This pin inputs the A/D converter reference voltage.

It converts signals input to ANI0 to ANI7 into digital signals according to the voltage applied between AV_{REF} and AV_{SS} .

Caution A series resistor string of several 10 k Ω is connected between the AV_{REF} pin and AV_{SS} pin. Therefore, when the output impedance of the reference voltage is too high, it seems as if the AV_{REF} pin and the series resistor string are connected in parallel. This may cause a greater reference voltage error.

(8) AV_{SS} pin

This is the GND potential pin of the A/D converter. Always keep it at the same potential as the V_{SS0} pin even when not using the A/D converter.

(9) AV_{DD} pin

This is the A/D converter analog power supply pin. Always keep it at the same potential as the V_{DD0} pin even when not using the A/D converter.

13.3 Registers to Control A/D Converter

The following 4 types of registers are used to control the A/D converter.

- A/D converter mode register 0 (ADM0)
- Analog input channel specification register 0 (ADS0)
- External interrupt rising edge enable register (EGP)
- External interrupt falling edge enable register (EGN)

(1) A/D converter mode register 0 (ADM0)

This register sets the conversion time for analog input to be A/D converted, conversion start/stop, and external trigger.

ADM0 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ADM0 to 00H.

Figure 13-2. A/D Converter Mode Register 0 (ADM0) Format

Address: FF80H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ADM0	ADCS0	TRG0	FR02	FR01	FR00	EGA01	EGA00	0

ADCS0	A/D Conversion Operation Control
0	Stop conversion operation.
1	Enable conversion operation.

TRG0	Software Start/Hardware Start Selection
0	Software start
1	Hardware start

FR02	FR01	FR00	Conversion Time Selection ^{Note 1}
0	0	0	144/fx (17.1 μ s)
0	0	1	120/fx (14.3 μ s)
0	1	0	96/fx (Setting prohibited ^{Note 2})
1	0	0	72/fx (Setting prohibited ^{Note 2})
1	0	1	60/fx (Setting prohibited ^{Note 2})
1	1	0	48/fx (Setting prohibited ^{Note 2})
Other than above			Setting prohibited

EGA01	EGA00	External Trigger Signal, Edge Specification
0	0	No edge detection
0	1	Falling edge detection
1	0	Rising edge detection
1	1	Both falling and rising edge detection

- Notes**
1. Set so that the A/D conversion time is 14 μ s or more.
 2. Setting prohibited because A/D conversion time is less than 14 μ s.

Caution When rewriting FR00 to FR02 to other than the same data, stop A/D conversion operations once prior to performing rewrite.

- Remarks**
1. fx: Main system clock oscillation frequency
 2. Figures in parentheses are for operation with fx = 8.38 MHz.

(2) Analog input channel specification register 0 (ADS0)

This register specifies the analog voltage input port for A/D conversion.

ADS0 is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ADS0 to 00H.

Figure 13-3. Analog Input Channel Specification Register 0 (ADS0) Format

Address: FF81H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ADS0	0	0	0	0	0	ADS02	ADS01	ADS00

ADS02	ADS01	ADS00	Analog Input Channel Specification
0	0	0	ANI0
0	0	1	ANI1
0	1	0	ANI2
0	1	1	ANI3
1	0	0	ANI4
1	0	1	ANI5
1	1	0	ANI6
1	1	1	ANI7

(3) External interrupt rising edge enable register (EGP), external interrupt falling edge enable register (EGN)

These registers specify the valid edge for INT_P0 to INT_P3.

EGP and EGN are set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets EGP and EGN to 00H.

Figure 13-4. External Interrupt Rising Edge Enable Register (EGP), External Interrupt Falling Edge Enable Register (EGN) Format

Address: FF48H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
EGP	0	0	0	0	EGP3	EGP2	EGP1	EGP0

Address: FF49H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
EGN	0	0	0	0	EGN3	EGN2	ENG1	ENG0

EGP _n	EGN _n	INT _P _n Pin Valid Edge Selection (n = 0 to 3)
0	0	Interrupt disable
0	1	Falling edge
1	0	Rising edge
1	1	Both rising and falling edges


13.4 A/D Converter Operations

13.4.1 Basic operations of A/D converter

- <1> Select one channel for A/D conversion with the analog input channel specification register 0 (ADS0).
- <2> The voltage input to the selected analog input channel is sampled by the sample & hold circuit.
- <3> When sampling has been done for a certain time, the sample & hold circuit is placed in the hold state and the input analog voltage is held until the A/D conversion operation is ended.
- <4> Bit 7 of the successive approximation register (SAR) is set. The series resistor string voltage tap is set to $(1/2) AV_{REF}$ by the tap selector.
- <5> The voltage difference between the series resistor string voltage tap and analog input is compared by the voltage comparator. If the analog input is greater than $(1/2) AV_{REF}$, the MSB of SAR remains set. If the analog input is smaller than $(1/2) AV_{REF}$, the MSB is reset.
- <6> Next, bit 6 of SAR is automatically set, and the operation proceeds to the next comparison. The series resistor string voltage tap is selected according to the preset value of bit 7, as described below.
 - Bit 7 = 1: $(3/4) AV_{REF}$
 - Bit 7 = 0: $(1/4) AV_{REF}$The voltage tap and analog input voltage are compared and bit 6 of SAR is manipulated as follows.
 - Analog input voltage \geq Voltage tap: Bit 6 = 1
 - Analog input voltage $<$ Voltage tap: Bit 6 = 0
- <7> Comparison is continued in this way up to bit 0 of SAR.
- <8> Upon completion of the comparison of 8 bits, an effective digital result value remains in SAR, and the result value is transferred to and latched in the A/D conversion result register 0 (ADCR0).
At the same time, the A/D conversion end interrupt request (INTAD0) can also be generated.

Caution The first A/D conversion value just after A/D conversion operations start may not fall within the rating.

Figure 13-5. Basic Operation of 8-Bit A/D Converter

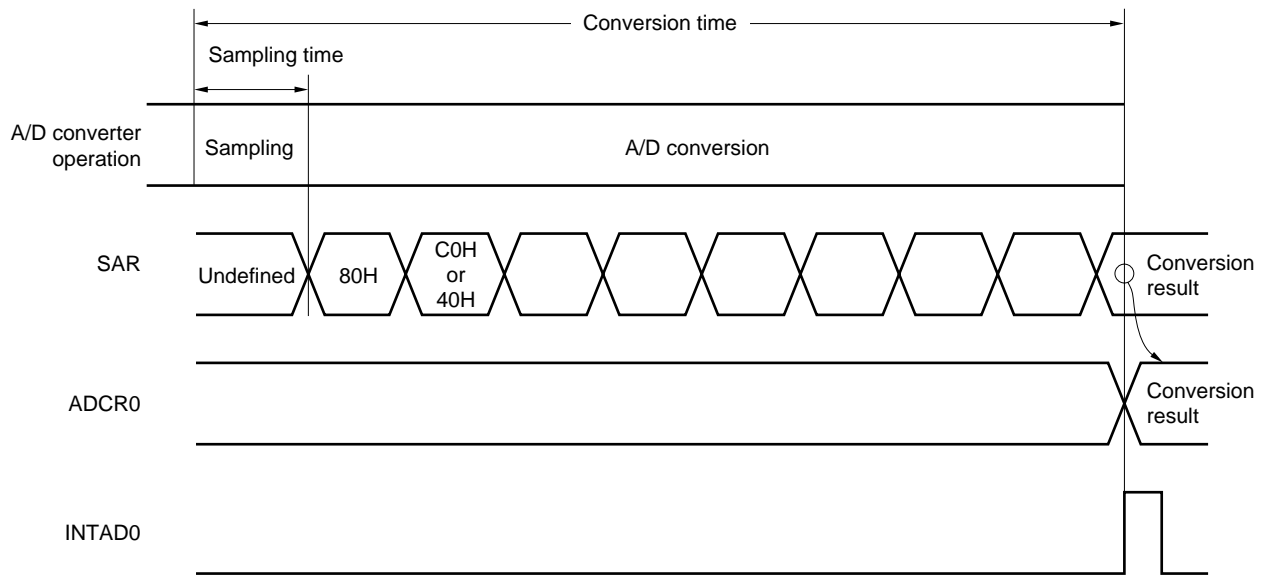

A/D conversion operations are performed continuously until bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) is reset (0) by software.

If a write operation is performed to the ADM0 or the analog input channel specification register 0 (ADS0) during an A/D conversion operation, the conversion operation is initialized, and if the ADCS0 bit is set (1), conversion starts again from the beginning.

$\overline{\text{RESET}}$ input sets the A/D conversion result register 0 (ADCR0) to 00H.

13.4.2 Input voltage and conversion results

The relationship between the analog input voltage input to the analog input pins (ANI0 to ANI7) and the A/D conversion result (stored in the A/D conversion result register 0 (ADCR0)) is shown by the following expression.

$$\text{ADCR0} = \text{INT} \left(\frac{V_{\text{IN}}}{\text{AV}_{\text{REF}}} \times 256 + 0.5 \right)$$

or

$$(\text{ADCR0} - 0.5) \times \frac{\text{AV}_{\text{REF}}}{256} \leq V_{\text{IN}} < (\text{ADCR0} + 0.5) \times \frac{\text{AV}_{\text{REF}}}{256}$$

where, INT() : Function which returns integer part of value in parentheses


V_{IN} : Analog input voltage

AV_{REF} : AV_{REF} pin voltage

ADCR0 : A/D conversion result register 0 (ADCR0) value

Figure 13-6 shows the relationship between the analog input voltage and the A/D conversion result.

Figure 13-6. Relationship between Analog Input Voltage and A/D Conversion Result

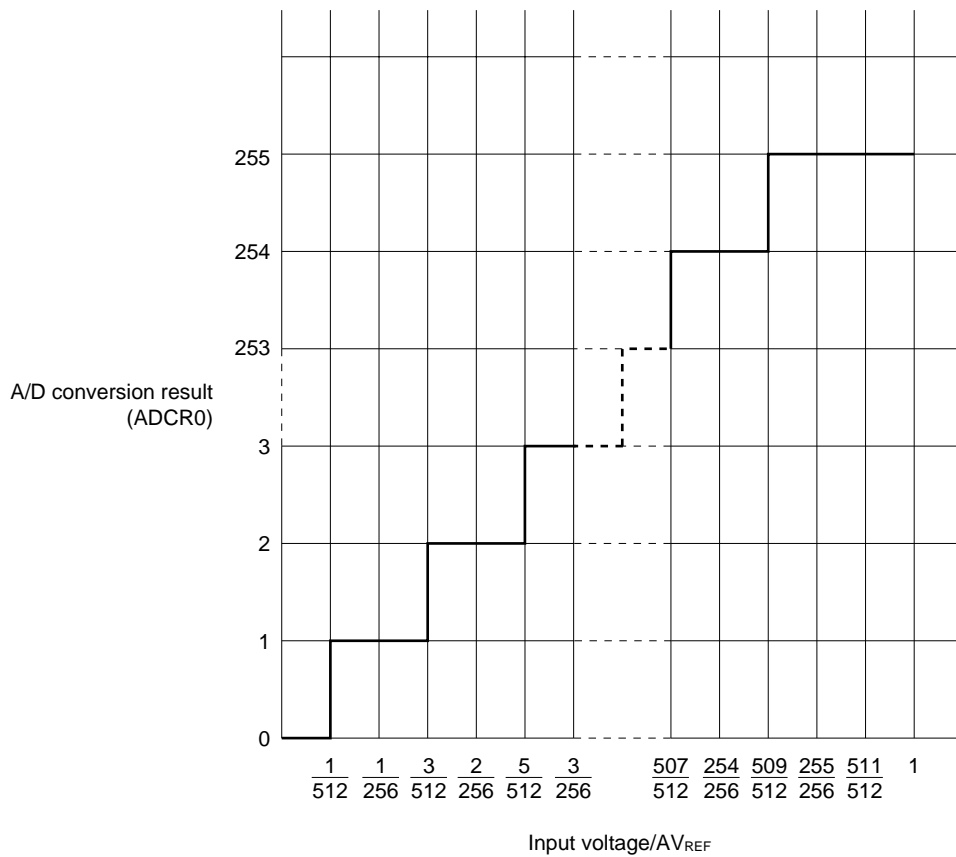

13.4.3 A/D converter operation mode

One analog input channel is selected from among ANI0 to ANI7 by the analog input channel specification register 0 (ADS0) and start A/D conversion.

A/D conversion can be started in either of the following two ways.

- **Hardware start** : Conversion is started by trigger input (rising edge, falling edge, or both rising and falling edges enabled).
- **Software start** : Conversion is started by specifying the A/D converter mode register 0 (ADM0).

The A/D conversion result is stored in the A/D conversion result register 0 (ADCR0), and the interrupt request signal (INTAD0) is simultaneously generated.

(1) A/D conversion by hardware start

When bit 6 (TRG0) and bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) are set to 1, the A/D conversion standby state is set. When the external trigger signal (ADTRG) is input, A/D conversion of the voltage applied to the analog input pins specified by the analog input channel specification register 0 (ADS0) starts.


Upon the end of the A/D conversion, the conversion result is stored in the A/D conversion result register 0 (ADCR0), and the interrupt request signal (INTAD0) is generated. After one A/D conversion operation is started and ended, the next conversion operation is not started until a new external trigger signal is input.

If ADS0 is rewritten during A/D conversion, the converter suspends A/D conversion and waits for a new external trigger signal to be input. When the external trigger input signal is reinput, A/D conversion is carried out from the beginning. If ADS0 is rewritten during A/D conversion waiting, A/D conversion starts when the following external trigger input signal is input.

If data with ADCS0 set to 0 is written to ADM0 during A/D conversion, A/D conversion stops immediately.

Caution When P03/INTP3/ADTRG is used as the external trigger input (ADTRG), specify the valid edge by bits 1 and 2 (EGA00, EGA01) of the A/D converter mode register 0 (ADM0) and set the interrupt mask flag (PMK3) to 1.

Figure 13-7. A/D Conversion by Hardware Start (When Falling Edge Is Specified)

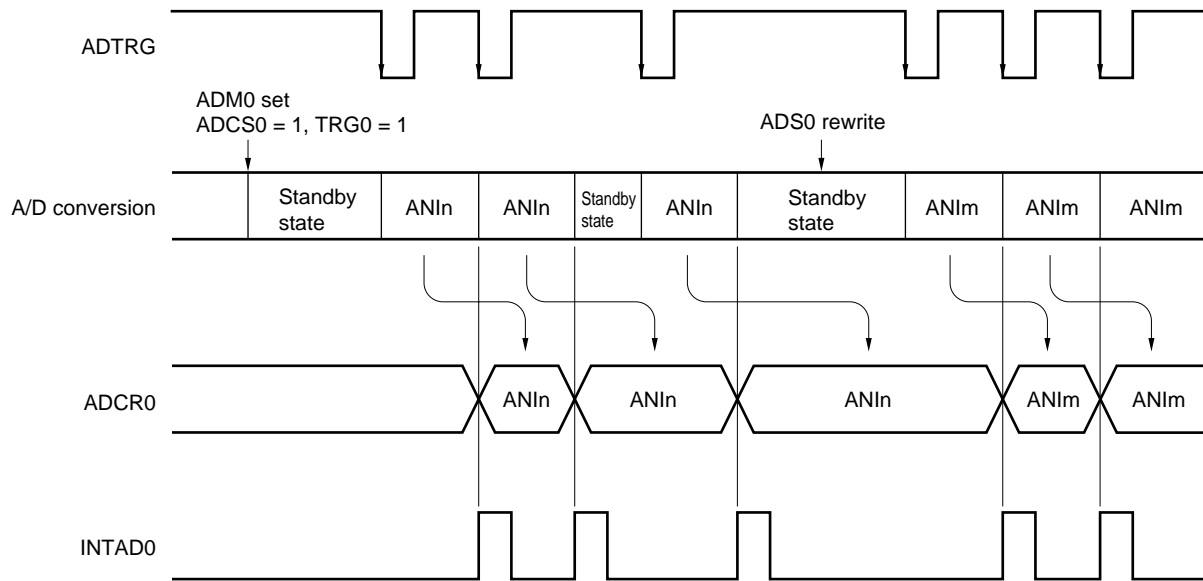

- Remarks**
1. $n = 0, 1, \dots, 7$
 2. $m = 0, 1, \dots, 7$

(2) A/D conversion by software start


When bit 6 (TRG0) and bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) are set to 0 and 1, respectively, A/D conversion of the voltage applied to the analog input pin specified by the analog input channel specification register 0 (ADS0) starts.

Upon the end of the A/D conversion, the conversion result is stored in the A/D conversion result register 0 (ADCR0), and the interrupt request signal (INTAD0) is generated. After one A/D conversion operation is started and ended, the next conversion operation is immediately started. A/D conversion operations are repeated until new data is written to ADS0.

If ADS0 is rewritten during A/D conversion, the converter suspends A/D conversion and A/D conversion of the newly selected analog input channel is started.

If data with ADCS0 set to 0 is written to ADM0 during A/D conversion operation, the A/D conversion operation stops immediately.

Figure 13-8. A/D Conversion by Software Start

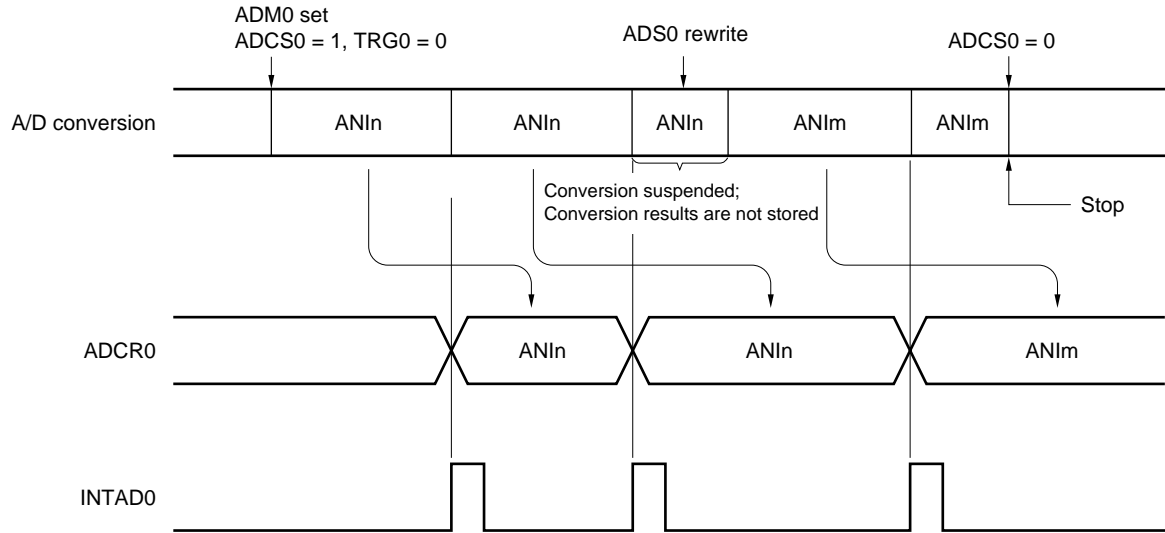

- Remarks**
1. $n = 0, 1, \dots, 7$
 2. $m = 0, 1, \dots, 7$


13.5 A/D Converter Cautions

(1) Current consumption in standby mode

A/D converter stops operating in the standby mode. At this time, current consumption can be reduced by stopping the conversion operation (by setting bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) to 0).

Figure 13-9 shows how to reduce the current consumption in the standby mode.

Figure 13-9. Example of Method of Reducing Current Consumption in Standby Mode

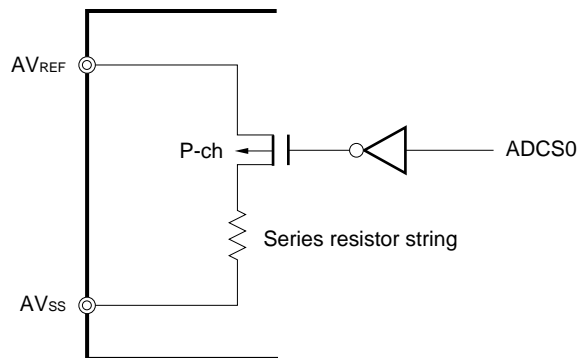

(2) Input range of ANI0 to ANI7

The input voltages of ANI0 to ANI7 should be within the specification range. In particular, if a voltage higher than AVREF or lower than AVSS is input (even if within the absolute maximum rating range), the conversion value of that channel will be undefined and the conversion values of other channels may also be affected.


(3) Contending operations

- <1> Contention between A/D conversion result register 0 (ADCR0) write and ADCR0 read by instruction upon the end of conversion
ADCR0 read is given priority. After the read operation, the new conversion result is written to ADCR0.
- <2> Contention between ADCR0 write and external trigger signal input upon the end of conversion
The external trigger signal is not accepted during A/D conversion. Therefore, the external trigger signal is not accepted during ADCR0 write.
- <3> Contention between ADCR0 write and A/D converter mode register 0 (ADM0) write or analog input channel specification register 0 (ADS0) write
ADM0 or ADS0 write is given priority. ADCR0 write is not performed, nor is the conversion end interrupt request signal (INTAD0) generated.

<4> Noise countermeasures

To maintain the 8-bit resolution, attention must be paid to noise input to pin AV_{REF} and pins ANI0 to ANI7. Because the effect increases in proportion to the output impedance of the analog input source, it is recommended that a capacitor be connected externally as shown in Figure 13-10 to reduce noise.

Figure 13-10. Analog Input Pin Connection

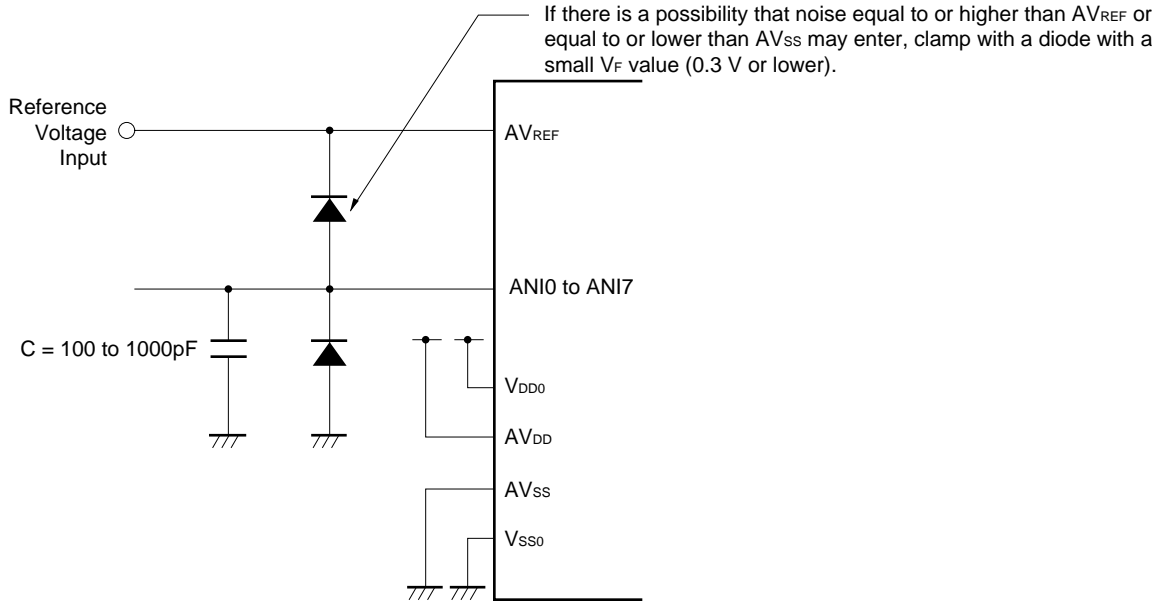**(5) ANI0 to ANI7**

The analog input pins (ANI0 to ANI7) also function as input/output port pins (P10 to P17).

When A/D conversion is performed with any of pins ANI0 to ANI7 selected, do not execute an input instruction to port 1 while conversion is in progress, as this may reduce the conversion resolution.

Also, if digital pulses are applied to a pin adjacent to the pin in the process of A/D conversion, the expected A/D conversion value may not be obtainable due to coupling noise. Therefore, avoid applying pulses to pins adjacent to the pin undergoing A/D conversion.

(6) AV_{REF} pin input impedance

A series resistor string of several 10 k Ω is connected between the AV_{REF} pin and the AV_{SS} pin.

Therefore, when the output impedance of the reference voltage is too high, it seems as if the AV_{REF} pin and the series resistor string are connected in parallel. This may cause a greater reference voltage error.


(7) Interrupt request flag (ADIF0)

The interrupt request flag (ADIF0) is not cleared even if the analog input channel specification register 0 (ADS0) is changed.

Therefore, if an analog input pin is changed during A/D conversion, the A/D conversion result and conversion end interrupt request flag for the pre-change analog input may be set just before the ADS0 rewrite. Caution is therefore required since, at this time, when ADIF0 is read immediately just after the ADS0 rewrite, ADIF0 is set despite the fact that the A/D conversion for the post-change analog input has not ended.

When the A/D conversion is stopped and then resumed, clear ADIF0 before the A/D conversion operation is resumed.

Figure 13-11. A/D Conversion End Interrupt Request Generation Timing

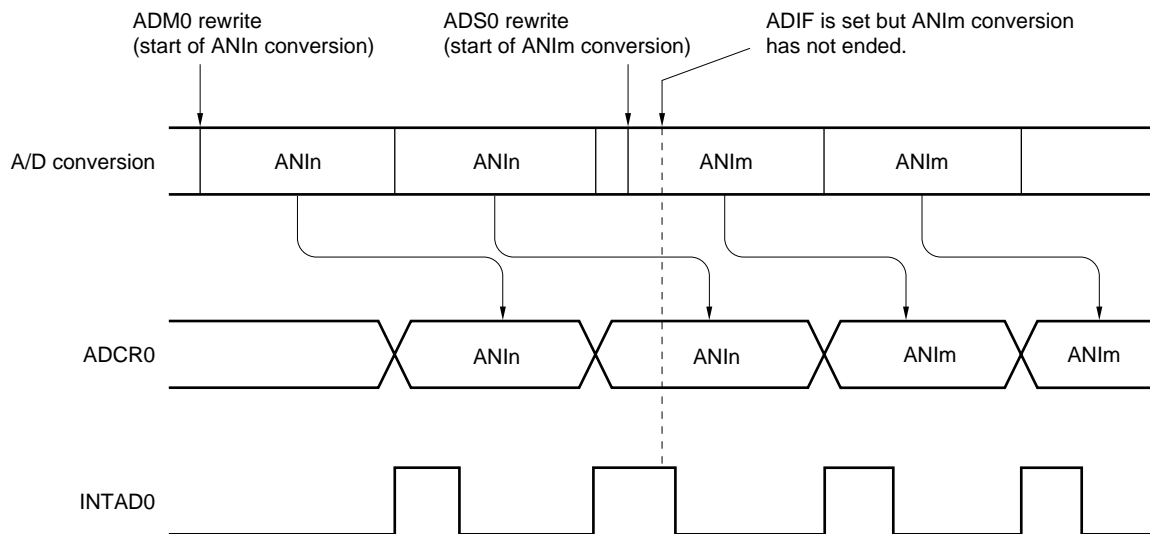


- Remarks**
1. $n = 0, 1, \dots, 7$
 2. $m = 0, 1, \dots, 7$

(8) AV_{DD} pin

The AV_{DD} pin is the analog circuit power supply pin. It supplies power to the input circuits of the ANI0 to ANI7 pins.

Therefore, be sure to apply the same voltage as V_{DD0} to this pin even when the application circuit is designed so as to switch its power supply to a backup battery.

Figure 13-12. AV_{DD} Pin Connection

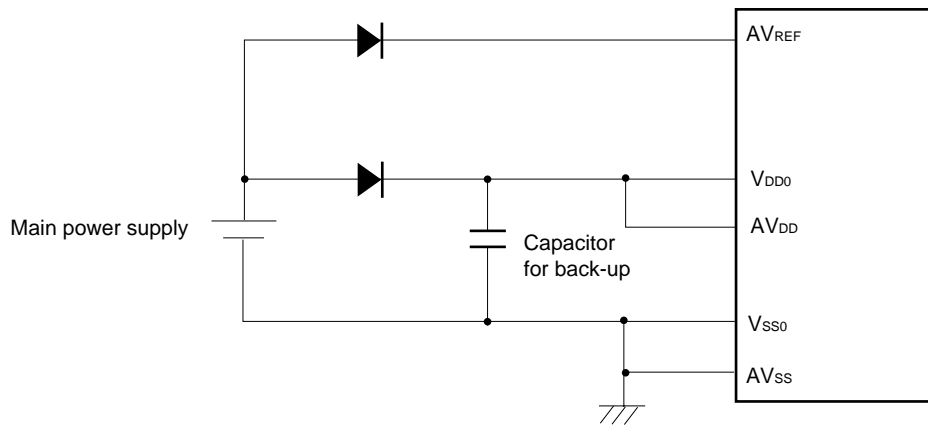**(9) Conversion results just after A/D conversion start**

The first A/D conversion value just after A/D conversion operations start may not fall within the rating. Polling A/D conversion end interrupt request (INTAD0) and take measures such as removing the first conversion results.

(10) A/D conversion result register 0 (ADCR0) read operation

When writing is performed to the A/D converter mode register 0 (ADM0) and analog input channel specification register 0 (ADS0), the contents of ADCR0 may become undefined. Read the conversion result following conversion completion before writing to ADM0, ADS0. Using a timing other than the above may cause an incorrect conversion result to be read.

[MEMO]

CHAPTER 14 10-BIT A/D CONVERTER (μ PD780034A, 780034AY SUBSERIES)

14.1 A/D Converter Functions

A/D converter is a 10-bit resolution converter that converts analog inputs into digital signals. It can control up to 8 analog input channels (ANI0 to ANI7).

(1) Hardware start


Conversion is started by trigger input (ADTRG: rising edge, falling edge, or both rising and falling edges can be specified).

(2) Software start

Conversion is started by setting the A/D converter mode register 0 (ADM0).

Select one channel for analog input from ANI0 to ANI7 to start A/D conversion. In the case of hardware start, the A/D converter stops when A/D conversion is completed, and an interrupt request (INTAD0) is generated. In the case of software start, A/D conversion is repeated. Each time as A/D conversion operation ends, an interrupt request (INTAD0) is generated.

Figure 14-1. 10-Bit A/D Converter Block Diagram

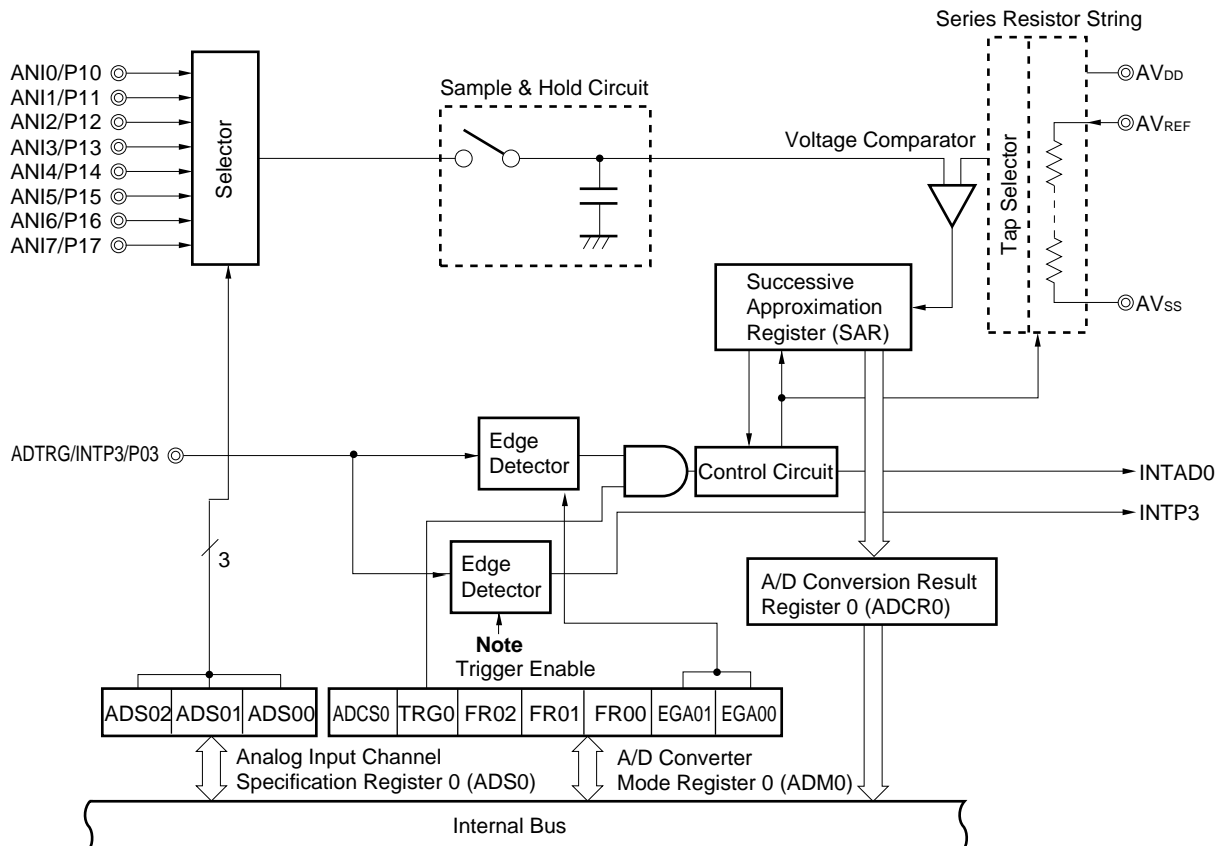

Note The effective edge is specified by bit 3 of the EGP and EGN registers (See Figure 19-5 External Interrupt Rising Edge Enable Register (EGP), External Interrupt Falling Edge Enable Register (EGN) Format.)

14.2 A/D Converter Configuration

A/D converter consists of the following hardware.

Table 14-1. A/D Converter Configuration

Item	Configuration
Analog input	8 channels (ANI0 to ANI7)
Registers	Successive approximation register (SAR) A/D conversion result register 0 (ADCR0)
Control registers	A/D converter mode register 0 (ADM0) Analog input channel specification register 0 (ADS0) External interrupt rising edge enable register (EGP) External interrupt falling edge enable register (EGN)

(1) Successive approximation register (SAR)

This register compares the analog input voltage value to the voltage tap (compare value) value applied from the series resistor string, and holds the result from the most significant bit (MSB).

When up to the least significant bit (LSB) is hold (end of A/D conversion), the SAR contents are transferred to the A/D conversion result register 0 (ADCR0).

(2) A/D conversion result register 0 (ADCR0)

This is a 16-bit register which stores the A/D conversion results. Lower 6-bit is fixed to 0. Each time A/D conversion ends, the conversion result is loaded from the successive approximation register (SAR) and held by this register. ADCR0 is read by a 16-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ADCR0 to 00H.

Caution When writing is performed to the A/D converter mode register 0 (ADM0) and analog input channel specification register 0 (ADS0), the contents of ADCR0 may become undefined. Read the conversion result following conversion completion before writing to ADM0, ADS0. Using a timing other than the above may cause an incorrect conversion result to be read.

(3) Sample & hold circuit

The sample & hold circuit samples each analog input signal sequentially applied from the input circuit, and sends it to the voltage comparator. This circuit holds the sampled analog input voltage value during A/D conversion.

(4) Voltage comparator

The voltage comparator compares the analog input to the series resistor string output voltage.

(5) Series resistor string

The series resistor string is connected between AV_{REF} and AV_{SS} , and generates a voltage to be compared to the analog input.

(6) ANI0 to ANI7 pins

These are eight analog input pins to input analog signals to undergo A/D conversion to the A/D converter. ANI0 to ANI7 are dual-function pins that can also be used for digital input.

- Cautions**
- 1. Use ANI0 to ANI7 input voltages within the specification range. If a voltage higher than AV_{REF} or lower than AV_{SS} is applied (even if within the absolute maximum rating range), the conversion value of that channel will be undefined and the conversion values of other channels may also be affected.**
 - 2. Analog input (ANI0 to ANI7) pins are alternate function pins that can also be used as input port (P10 to P17) pins. When A/D conversion is performed by selecting any one of ANI0 through ANI7, do not execute any input instruction to port 1 during conversion. It may cause the lower conversion resolution.**
When a digital pulse is applied to a pin adjacent to the pin in the process of A/D conversion, A/D conversion values may not be obtained as expected due to coupling noise. Thus, do not apply any pulse to a pin adjacent to the pin in the process of A/D conversion.

(7) AV_{REF} pin

This pin inputs the A/D converter reference voltage.

It converts signals input to ANI0 to ANI7 into digital signals according to the voltage applied between AV_{REF} and AV_{SS} .

Caution A series resistor string of several 10 k Ω is connected between the AV_{REF} and AV_{SS} pins. Therefore, when output impedance of the reference voltage is too high, it seems as if the AV_{REF} pin and the series resistor string are connected in parallel. This may cause a greater reference voltage error.

(8) AV_{SS} pin

This is the GND potential pin of the A/D converter. Always keep it at the same potential as the V_{SS0} pin when not using the A/D converter.

(9) AV_{DD} pin

This is the A/D converter analog power supply pin. Always keep it at the same potential as the V_{DD0} pin even when not using the A/D converter.

14.3 Registers to Control A/D Converter

The following 4 types of registers are used to control A/D Converter.

- A/D converter mode register 0 (ADM0)
- Analog input channel specification register 0 (ADS0)
- External interrupt rising edge enable register (EGP)
- External interrupt falling edge enable register (EGN)

(1) A/D converter mode register 0 (ADM0)

This register sets the conversion time for analog input to be A/D converted, conversion start/stop, and external trigger.

ADM0 is set by a 1-bit or 8-bit memory manipulation instruction.

\overline{RESET} input sets ADM0 to 00H.

Figure 14-2. A/D Converter Mode Register 0 (ADM0) Format

Address: FF80H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ADM0	ADCS0	TRG0	FR02	FR01	FR00	EGA01	EGA00	0

ADCS0	A/D Conversion Operation Control
0	Stop conversion operation.
1	Enable conversion operation.

TRG0	Software Start/Hardware Start Selection
0	Software start
1	Hardware start

FR02	FR01	FR00	Conversion Time Selection ^{Note 1}
0	0	0	144/f _x (17.1 μ s)
1	0	1	120/f _x (14.3 μ s)
0	1	0	96/f _x (Setting prohibited ^{Note 2})
1	0	0	72/f _x (Setting prohibited ^{Note 2})
1	0	1	60/f _x (Setting prohibited ^{Note 2})
1	1	0	48/f _x (Setting prohibited ^{Note 2})
Other than above			Setting prohibited

EGA01	EGA00	External Trigger Signal, Edge Specification
0	0	No edge detection
0	1	Falling edge detection
1	0	Rising edge detection
1	1	Both falling and rising edge detection

- Notes**
1. Set so that the A/D conversion time is 14 μ s or more.
 2. Setting prohibited because A/D conversion time is less than 14 μ s.

Caution When rewrite FR00 to FR02 to other than the same data, stop A/D conversion operations once before performing it.

- Remarks**
1. f_x: Main system clock oscillation frequency
 2. Figures in parentheses are for operation with f_x = 8.38 MHz.

(2) Analog input channel specification register 0 (ADS0)

This register specifies the analog voltage input port for A/D conversion.

ADS0 is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ADS0 to 00H.

Figure 14-3. Analog Input Channel Specification Register 0 (ADS0) Format

Address: FF81H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ADS0	0	0	0	0	0	ADS02	ADS01	ADS00

ADS02	ADS01	ADS00	Analog Input Channel Specification
0	0	0	ANI0
0	0	1	ANI1
0	1	0	ANI2
0	1	1	ANI3
1	0	0	ANI4
1	0	1	ANI5
1	1	0	ANI6
1	1	1	ANI7

(3) External interrupt rising edge enable register (EGP), external interrupt falling edge enable register (EGN)

These registers specify the valid edge for INTP0 to INTP3.

EGP and EGN are set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets EGP and EGN to 00H.

Figure 14-4. External Interrupt Rising Edge Enable Register (EGP), External Interrupt Falling Edge Enable Register (EGN) Format

Address: FF48H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
EGP	0	0	0	0	EGP3	EGP2	EGP1	EGP0

Address: FF49H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
EGN	0	0	0	0	EGN3	EGN2	ENG1	ENG0

EGPn	EGNn	INTPn Pin Valid Edge Selection (n = 0 to 3)
0	0	Interrupt disable
0	1	Falling edge
1	0	Rising edge
1	1	Both rising and falling edges


14.4 A/D Converter Operation

14.4.1 Basic operations of A/D converter

- <1> Select one channel for A/D conversion with the analog input channel specification register 0 (ADS0).
- <2> The voltage input to the selected analog input channel is sampled by the sample & hold circuit.
- <3> When sampling has been done for a certain time, the sample & hold circuit is placed in the hold state and the input analog voltage is held until the A/D conversion operation is ended.
- <4> Bit 9 of the successive approximation register (SAR) is set. The series resistor string voltage tap is set to $(1/2) AV_{REF}$ by the tap selector.
- <5> The voltage difference between the series resistor string voltage tap and analog input is compared by the voltage comparator. If the analog input is greater than $(1/2) AV_{REF}$, the MSB of SAR remains set. If the analog input is smaller than $(1/2) AV_{REF}$, the MSB is reset.
- <6> Next, bit 6 of SAR is automatically set, and the operation proceeds to the next comparison. The series resistor string voltage tap is selected according to the preset value of bit 9, as described below.
 - Bit 9 = 1: $(3/4) AV_{REF}$
 - Bit 9 = 0: $(1/4) AV_{REF}$The voltage tap and analog input voltage are compared and bit 8 of SAR is manipulated as follows.
 - Analog input voltage \geq Voltage tap: Bit 8 = 1
 - Analog input voltage $<$ Voltage tap: Bit 8 = 0
- <7> Comparison is continued in this way up to bit 0 of SAR.
- <8> Upon completion of the comparison of 10 bits, an effective digital result value remains in SAR, and the result value is transferred to and latched in the A/D conversion result register 0 (ADCR0).
At the same time, the A/D conversion end interrupt request (INTAD0) can also be generated.

Caution The first A/D conversion value just after A/D conversion operations start may not fall within the rating.

Figure 14-5. Basic Operation of 10-Bit A/D Converter

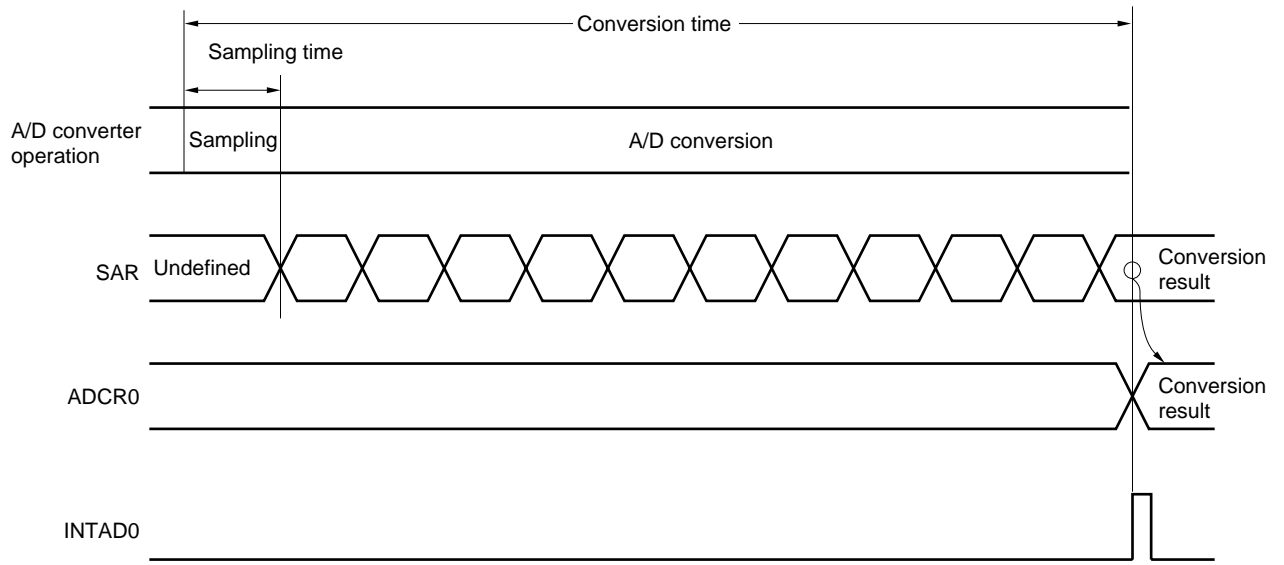

A/D conversion operations are performed continuously until bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) is reset (0) by software.

If a write operation is performed to the ADM0 or the analog input channel specification register 0 (ADS0) during an A/D conversion operation, the conversion operation is initialized, and if the ADCS0 bit is set (1), conversion starts again from the beginning.

$\overline{\text{RESET}}$ input sets the A/D conversion result register 0 (ADCR0) to 00H.

14.4.2 Input voltage and conversion results

The relationship between the analog input voltage input to the analog input pins (ANI0 to ANI7) and the A/D conversion result (stored in the A/D conversion result register 0 (ADCR0)) is shown by the following expression.

$$ADCR0 = \text{INT} \left(\frac{V_{IN}}{AV_{REF}} \times 1024 + 0.5 \right)$$

or

$$(ADCR0 - 0.5) \times \frac{AV_{REF}}{1024} \leq V_{IN} < (ADCR0 + 0.5) \times \frac{AV_{REF}}{1024}$$

where, INT() : Function which returns integer part of value in parentheses


V_{IN} : Analog input voltage

AV_{REF} : AV_{REF} pin voltage

ADCR0: A/D conversion result register 0 (ADCR0) value

Figure 14-6 shows the relationship between the analog input voltage and the A/D conversion result.

Figure 14-6. Relationship between Analog Input Voltage and A/D Conversion Result

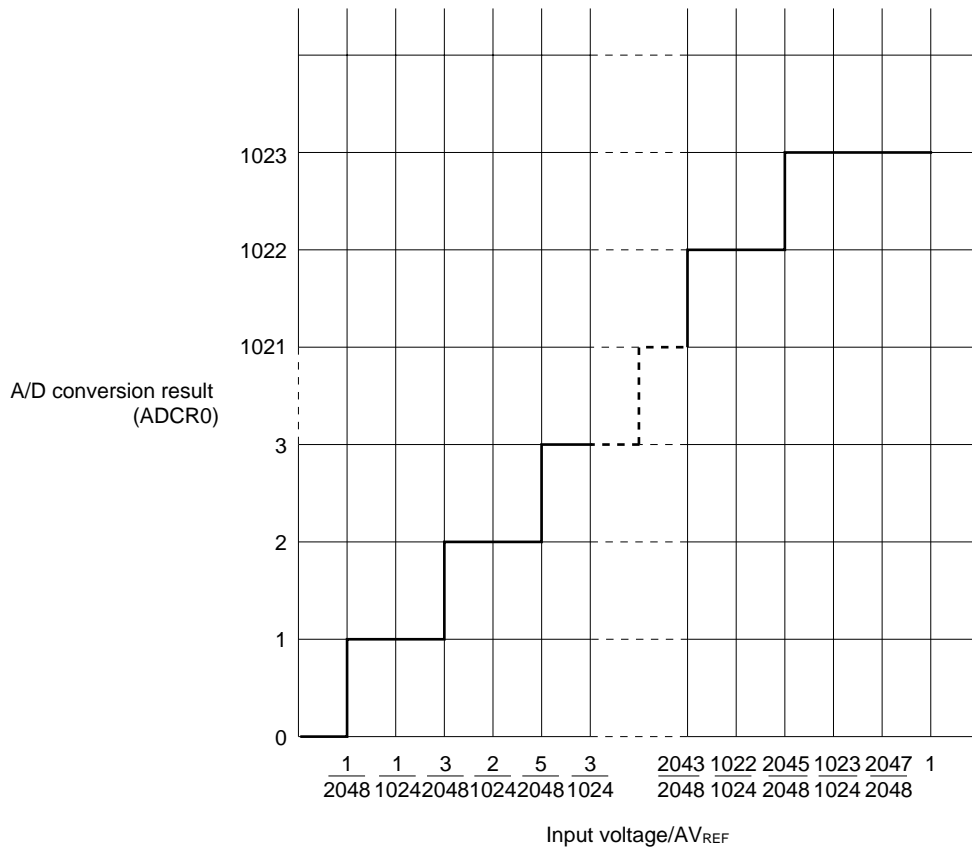

14.4.3 A/D converter operation mode

Select one analog input channel from among ANI0 to ANI7 by the analog input channel specification register 0 (ADS0) to start A/D conversion.

A/D conversion can be started in either of the following two ways.

- Hardware start : Conversion is started by trigger input (rising edge, falling edge, or both rising and falling edges enabled).
- Software start : Conversion is started by specifying the A/D converter mode register 0 (ADM0).

The A/D conversion result is stored in the A/D conversion result register 0 (ADCR0), and the interrupt request signal (INTAD0) is simultaneously generated.

(1) A/D conversion by hardware start

When bit 6 (TRG0) and bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) are set to 1, the A/D conversion standby state is set. When the external trigger signal (ADTRG) is input, A/D conversion of the voltage applied to the analog input pin specified by the analog input channel specification register 0 (ADS0) starts.


Upon the end of the A/D conversion, the conversion result is stored in the A/D conversion result register (ADCR0), and the interrupt request signal (INTAD0) is generated. After one A/D conversion operation is started and ended, the next conversion operation is not started until a new external trigger signal is input.

If ADS0 is rewritten during A/D conversion operation, the converter suspends A/D conversion and waits for a new external trigger signal to be input. When the external trigger input signal is reinput, A/D conversion is carried out from the beginning. If ADS0 is rewritten during A/D conversion waiting, A/D conversion starts when the following external trigger input signal is input.

If data with ADCS0 set to 0 is written to ADM0 during A/D conversion, the A/D conversion operation stops immediately.

Caution When P03/INTP3/ADTRG is used as the external trigger input (ADTRG), specify the valid edge by bits 1, 2 (EGA00, EGA01) of A/D converter mode register 0 (ADM0) and set the interrupt mask flag (PMK3) to 1.

Figure 14-7. A/D Conversion by Hardware Start (When Falling Edge Is Specified)

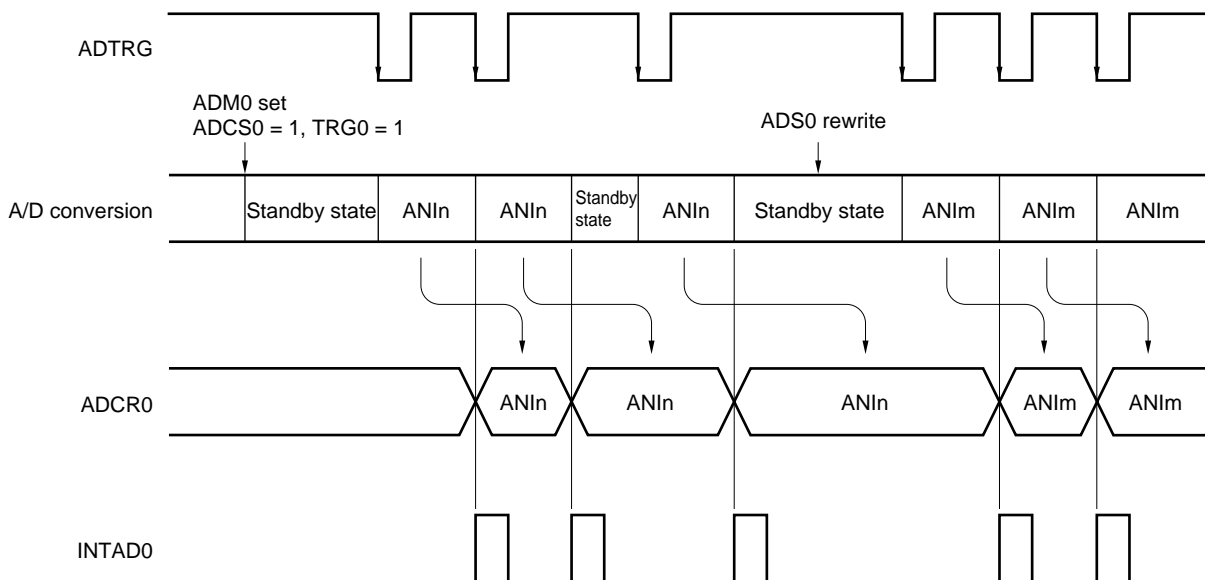

- Remarks**
1. $n = 0, 1, \dots, 7$
 2. $m = 0, 1, \dots, 7$

(2) A/D conversion by software start


When bit 6 (TRG0) and bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) are set to 0 and 1, respectively, A/D conversion of the voltage applied to the analog input pin specified by the analog input channel specification register 0 (ADS0) starts.

Upon the end of the A/D conversion, the conversion result is stored in the A/D conversion result register 0 (ADCR0), and the interrupt request signal (INTAD0) is generated. After one A/D conversion operation is started and ended, the next conversion operation is immediately started. A/D conversion operations are repeated until new data is written to ADS0.

If ADS0 is rewritten during A/D conversion, the converter suspends A/D conversion operation and A/D conversion of the new selected analog input channel starts.

If data with ADCS0 set to 0 is written to ADM0 during A/D conversion, the A/D conversion operation stops immediately.

Figure 14-8. A/D Conversion by Software Start

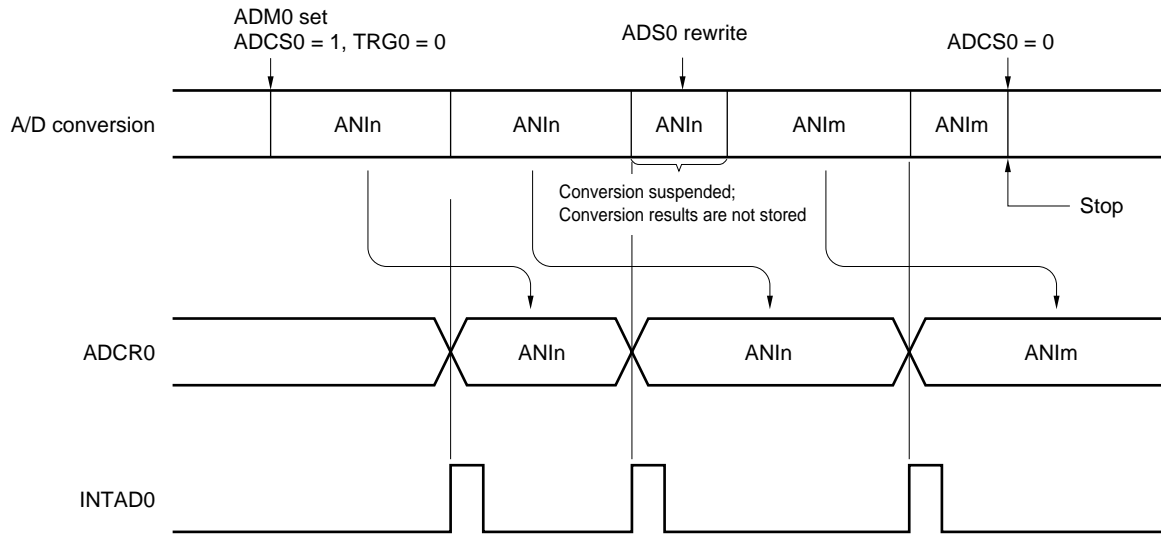

- Remarks**
1. $n = 0, 1, \dots, 7$
 2. $m = 0, 1, \dots, 7$


14.5 A/D Converter Cautions

(1) Current consumption in standby mode

A/D converter stops operating in the standby mode. At this time, current consumption can be reduced by stopping the conversion operation (by setting bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) to 0).

Figure 14-9 shows how to reduce the current consumption in the standby mode.

Figure 14-9. Example of Method of Reducing Current Consumption in Standby Mode

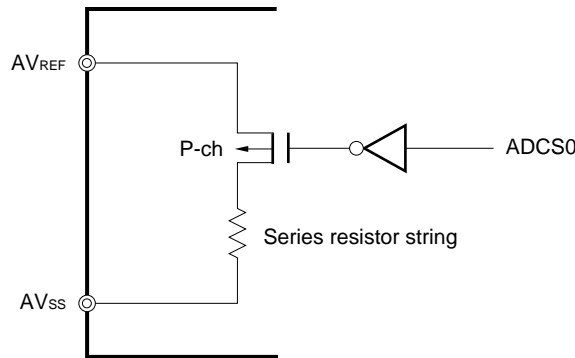


(2) Input range of ANI0 to ANI7

The input voltages of ANI0 to ANI7 should be within the specification range. In particular, if a voltage higher than AVREF or lower than AVSS is input (even if within the absolute maximum rating range), the conversion value of that channel will be undefined and the conversion values of other channels may also be affected.

(3) Contending operations

- <1> Contention between A/D conversion result register 0 (ADCR0) write and ADCR0 read by instruction upon the end of conversion
ADCR0 read is given priority. After the read operation, the new conversion result is written to ADCR0.
- <2> Contention between ADCR0 write and external trigger signal input upon the end of conversion
The external trigger signal is not accepted during A/D conversion. Therefore, the external trigger signal is not accepted during ADCR0 write.
- <3> Contention between ADCR0 write and A/D converter mode register 0 (ADM0) write or analog input channel specification register 0 (ADS0) write
ADM0 or ADS0 write is given priority. ADCR0 write is not performed, nor is the conversion end interrupt request signal (INTAD0) generated.
- <4> Noise countermeasures
To maintain the 10-bit resolution, attention must be paid to noise input to pin AVREF and pins ANI0 to ANI7. Because the effect increases in proportion to the output impedance of the analog input source, it is recommended that a capacitor be connected externally as shown in Figure 14-10 to reduce noise.

Figure 14-10. Analog Input Pin Connection

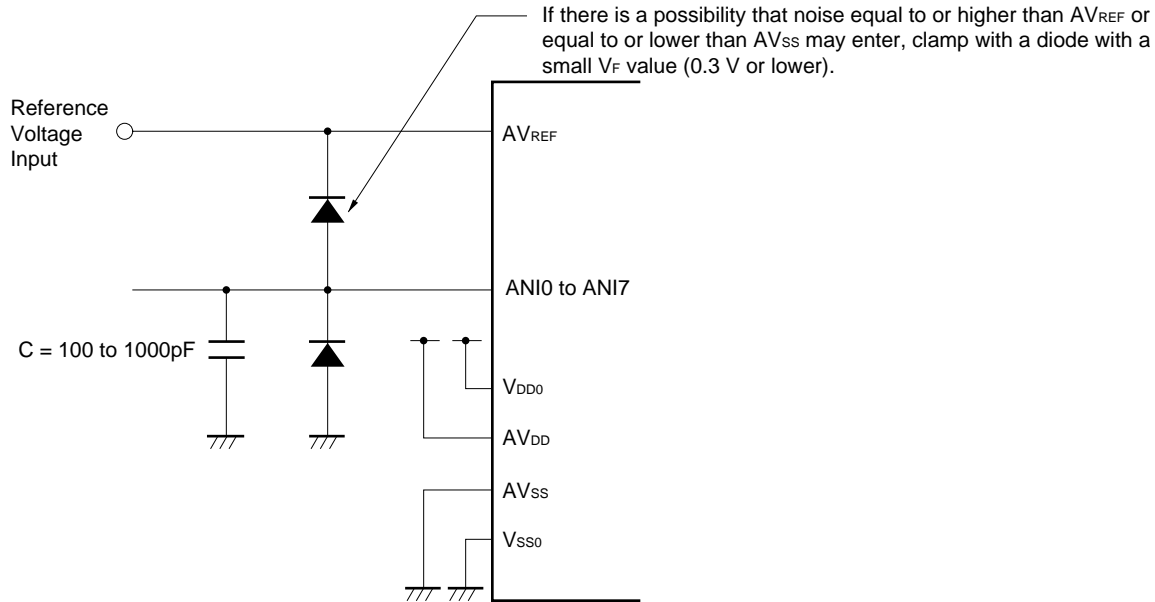**(5) ANI0 to ANI7**

The analog input pins (ANI0 to ANI7) also function as input/output port pins (P10 to P17).

When A/D conversion is performed with any of pins ANI0 to ANI7 selected, do not execute an input instruction to port 1 while conversion is in progress, as this may reduce the conversion resolution.

Also, if digital pulses are applied to a pin adjacent to the pin in the process of A/D conversion, the expected A/D conversion value may not be obtainable due to coupling noise. Therefore, avoid applying pulses to pins adjacent to the pin undergoing A/D conversion.

(6) AVREF pin input impedance

A series resistor string of several 10 k Ω is connected between the AVREF pin and the AVSS pin.

Therefore, when the output impedance of the reference voltage is too high, it seems as if the AVREF pin and the series resistor string are connected in parallel. This may cause a greater reference voltage error.


(7) Interrupt request flag (ADIF0)

The interrupt request flag (ADIF0) is not cleared even if the analog input channel specification register 0 (ADS0) is changed.

Therefore, if an analog input pin is changed during A/D conversion, the A/D conversion result and conversion end interrupt request flag for the pre-change analog input may be set just before the ADS0 rewrite. Caution is therefore required since, at this time, when ADIF0 is read immediately just after the ADS0 rewrite, ADIF0 is set despite the fact that the A/D conversion for the post-change analog input has not ended.

When A/D conversion is restarted after it is stopped, clear ADIF0 before restart.

Figure 14-11. A/D Conversion End Interrupt Request Generation Timing

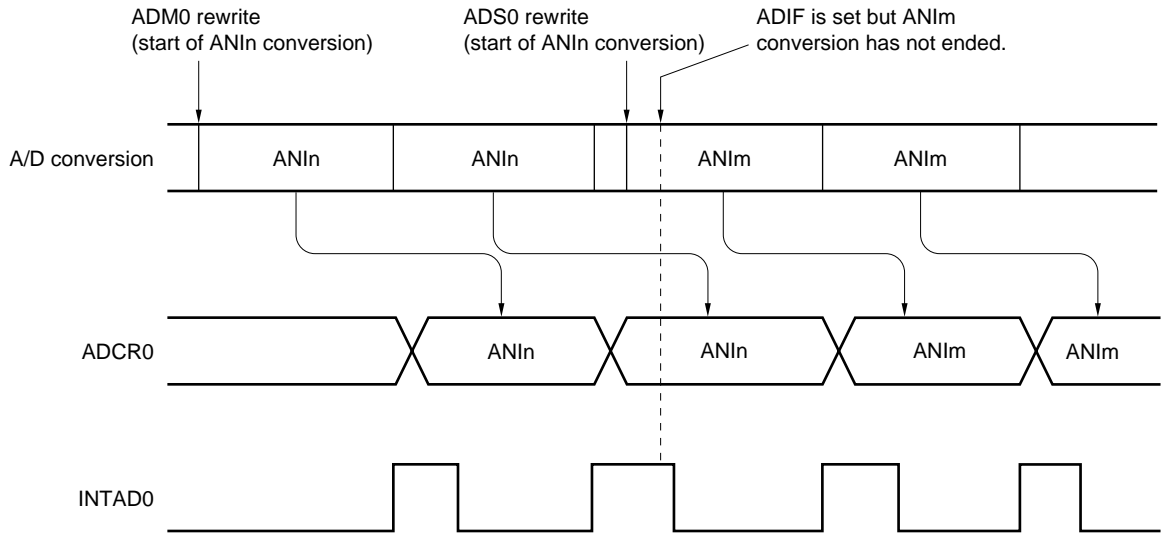


- Remarks**
1. $n = 0, 1, \dots, 7$
 2. $m = 0, 1, \dots, 7$

(8) AV_{DD} pin

The AV_{DD} pin is the analog circuit power supply pin. It supplies power to the input circuits of the ANI0 to ANI7 pins.

Therefore, be sure to apply the same potential as V_{DD0} to this pin even for applications designed to switch to a backup battery for power supply.

Figure 14-12. AV_{DD} Pin Connection

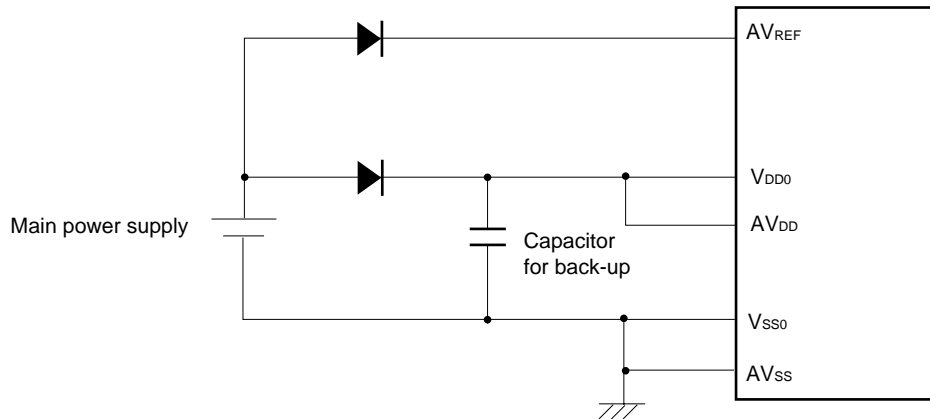**(9) Conversion results just after A/D conversion start**

The first A/D conversion value just after A/D conversion operations start may not fall within the rating. Polling A/D conversion end interrupt request (INTAD0) and take measures such as removing the first conversion results.

(10) A/D conversion result register 0 (ADCR0) read operation

When writing is performed to the A/D converter mode register 0 (ADM0) and analog input channel specification register 0 (ADS0), the contents of ADCR0 may become undefined. Read the conversion result following conversion completion before writing to ADM0, ADS0. Using a timing other than the above may cause an incorrect conversion result to be read.

CHAPTER 15 SERIAL INTERFACE OUTLINE

The μ PD780024A, 780034A Subseries and the μ PD780024AY, 780034AY Subseries have differences in their interfaces. These differences are listed in Table 15-1.

Table 15-1. Differences between μ PD780024A, 780034A Subseries and μ PD780024AY, 780034AY Subseries

Item		μ PD780024A, 780034A	μ PD780024AY, 780034AY	Relevant Section
UART0		√	√	CHAPTER 16
SIO3	SIO30	√	√	CHAPTER 17
	SIO31	√	—	
IIC0		—	√	CHAPTER 18

[MEMO]

CHAPTER 16 SERIAL INTERFACE (UART0)

16.1 Serial Interface Functions

The serial interface (UART0) has the following three modes.

(1) Operation stop mode

This mode is used when serial transfers are not performed to reduce power consumption.

For details, see **16.4.1 Operation stop mode**.

(2) Asynchronous serial interface (UART) mode

This mode enables full-duplex operation wherein one byte of data after the start bit is transmitted and received.

The on-chip baud rate generator dedicated to UART enables communications using a wide range of selectable baud rates. In addition, a baud rate can also be defined by dividing clocks input to the ASCK0 pin.

The UART baud rate generator can also be used to generate a MIDI-standard baud rate (31.25 kbps).


For details, see **16.4.2 Asynchronous serial interface (UART) mode**.

(3) Infrared data transfer mode

For details, see **16.4.3 Infrared data transfer mode**.


Figure 16-1 shows a block diagram of the serial interface (UART0) macro.

Figure 16-1. Serial Interface (UART0) Block Diagram

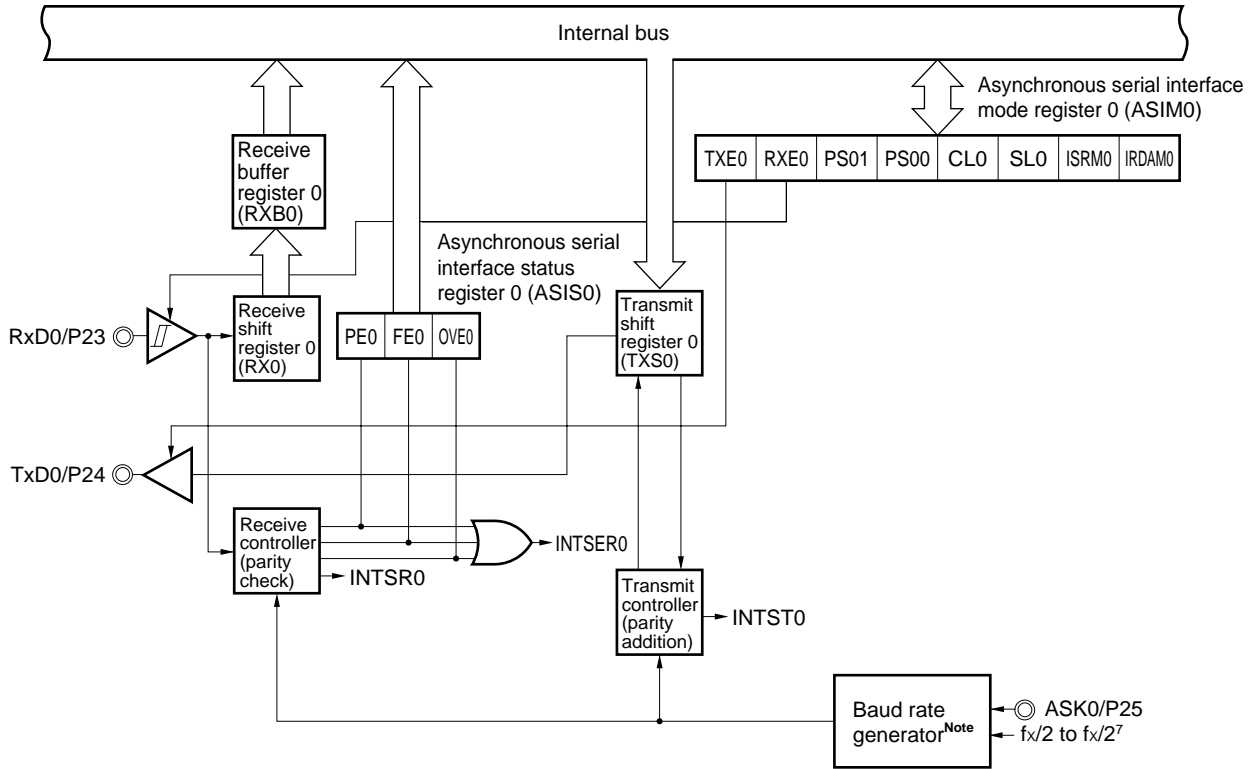

Note For the configuration of the baud rate generator, refer to **Figure 16-2**.

Figure 16-2. Baud Rate Generator Block Diagram

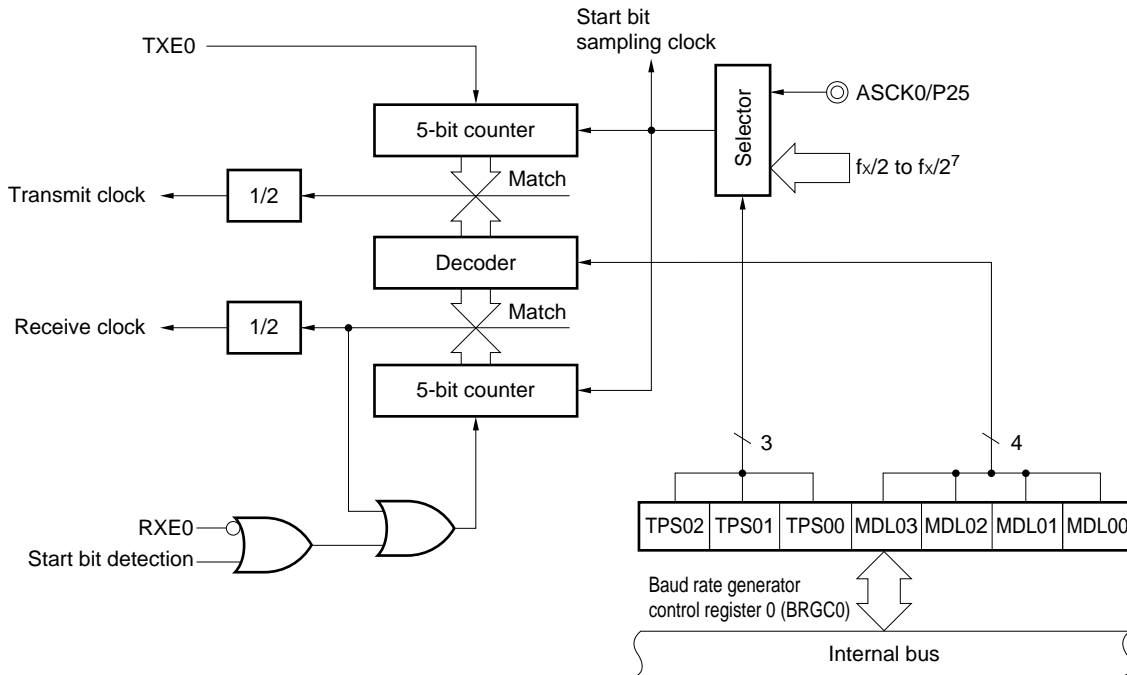

Remark TXE0: Bit 7 of asynchronous serial interface mode register 0 (ASIM0)
 RXE0: Bit 6 of asynchronous serial interface mode register 0 (ASIM0)

16.2 Serial Interface Configuration

The serial interface (UART0) includes the following hardware.

Table 16-1. Serial Interface (UART0) Configuration

Item	Configuration
Registers	Transmit shift register 0 (TXS0) Receive shift register 0 (RX0) Receive buffer register 0 (RXB0)
Control registers	Asynchronous serial interface mode register 0 (ASIM0) Asynchronous serial interface status register 0 (ASIS0) Baud rate generator control register 0 (BRGC0)

(1) Transmit shift register 0 (TXS0)

This is the register for setting transmit data. Data written to TXS0 is transmitted as serial data. When the data length is set as 7 bits, bits 0 to 6 of the data written to TXS0 are transferred as transmit data. Writing data to TXS0 starts the transmit operation. TXS0 can be written by an 8-bit memory manipulation instruction. It cannot be read. $\overline{\text{RESET}}$ input sets TXS0 to FFH.

Caution Do not write to TXS0 during a transmit operation. The same address is assigned to TXS0 and the receive buffer register 0 (RXB0). A read operation reads values from RXB0.

(2) Receive shift register 0 (RX0)

This register converts serial data input via the RxD0 pin to parallel data. When one byte of data is received at this register, the receive data is transferred to the receive buffer register 0 (RXB0). RX0 cannot be manipulated directly by a program.

(3) Receive buffer register 0 (RXB0)

This register is used to hold receive data. When one byte of data is received, one byte of new receive data is transferred from the receive shift register (RX0). When the data length is set as 7 bits, receive data is sent to bits 0 to 6 of RXB0. In this case, the MSB of RXB0 always becomes 0. RXB0 can be read by an 8-bit memory manipulation instruction. It cannot be written to. $\overline{\text{RESET}}$ input sets RXB0 to FFH.

Caution The same address is assigned to RXB0 and the transmit shift register 0 (TXS0). During a write operation, values are written to TXS0.

(4) Transmission control circuit

The transmission control circuit controls transmit operations, such as adding a start bit, parity bit, and stop bit to data that is written to the transmit shift register 0 (TXS0), based on the values set to the asynchronous serial interface mode register 0 (ASIM0).

(5) Reception control circuit

The reception control circuit controls receive operations based on the values set to the asynchronous serial interface mode register 0 (ASIM0). During a receive operation, it performs error checking, such as for parity errors, and sets various values to the asynchronous serial interface status register 0 (ASIS0) according to the type of error that is detected.

16.3 Registers to Control Serial Interface

The serial interface (UART0) uses the following three types of registers for control functions.

- Asynchronous serial interface mode register 0 (ASIM0)
- Asynchronous serial interface status register 0 (ASIS0)
- Baud rate generator control register 0 (BRGC0)

(1) Asynchronous serial interface mode register 0 (ASIM0)

This is an 8-bit register that controls serial interface (UART0)'s serial transfer operations.

ASIM0 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ASIM0 to 00H.

Figure 16-3 shows the format of ASIM0.

Caution In UART mode, set the port mode register (PMXX) as follows. Set the output latch to 0.

- **During receive operation**
Set P23 (RXD0) to input mode (PM23 = 1)
- **During transmit operation**
Set P24 (TXD0) to output mode (PM24 = 0)
- **During transmit/receive operation**
Set P23 (RXD0) to input mode, and P24 to output mode

Figure 16-3. Asynchronous Serial Interface Mode Register 0 (ASIM0) Format

Address: FFA0H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ASIM0	TXE0	RXE0	PS01	PS00	CL0	SL0	ISRM0	IRDAM0

TXE0	RXE0	Operation Mode	RxD0/P23 Pin Function	TxD0/P24 Pin Function
0	0	Operation stop	Port function (P23)	Port function (P24)
0	1	UART mode (receive only)	Serial function (RxD0)	
1	0	UART mode (transmit only)	Port function (P23)	Serial function (TxD0)
1	1	UART mode (transmit and receive)	Serial function (RxD0)	

PS01	PS00	Parity Bit Specification
0	0	No parity
0	1	Zero parity always added during transmission No parity detection during reception (parity errors do not occur)
1	0	Odd parity
1	1	Even parity

CL0	Character Length Specification
0	7 bits
1	8 bits

SL0	Stop Bit Length Specification for Transmit Data
0	1 bit
1	2 bits

ISRM0	Receive Completion Interrupt Control When Error Occurs
0	Receive completion interrupt request is issued when an error occurs
1	Receive completion interrupt request is not issued when an error occurs

IRDAM0	Operation Specified for Infrared Data Transfer Mode ^{Note 1}
0	UART (transmit/receive) mode
1	Infrared data transfer (transmit/receive) mode ^{Note 2}

- Notes**
1. The UART/infrared data transfer mode specification is controlled by TXE0 and RXE0.
 2. When using infrared data transfer mode, be sure to set “10H” to the baud rate generator control register 0 (BRGC0).

Caution Do not switch the operation mode until the current serial transmit/receive operation has stopped.

(2) Asynchronous serial interface status register 0 (ASIS0)

When a receive error occurs during UART mode, this register indicates the type of error.

ASIS0 can be read by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ASIS0 to 00H.

Figure 16-4. Asynchronous Serial Interface Status Register 0 (ASIS0) Format

Address: FFA1H After Reset: 00H R

Symbol	7	6	5	4	3	2	1	0
ASIS0	0	0	0	0	0	PE0	FE0	OVE0

PE0	Parity Error Flag
0	No parity error
1	Parity error (Incorrect parity bit detected)

FE0	Framing Error Flag
0	No framing error
1	Framing error ^{Note 1} (Stop bit not detected)

OVE0	Overrun Error Flag
0	No overrun error
1	Overrun error ^{Note 2} (Next receive operation was completed before data was read from receive buffer register 0 (RXB0))

- Notes**
1. Even if a stop bit length is set to two bits by setting bit 2 (SL0) in the asynchronous serial interface mode register 0 (ASIM0), stop bit detection during a receive operation only applies to a stop bit length of 1 bit.
 2. Be sure to read the contents of the receive buffer register 0 (RXB0) when an overrun error has occurred.
Until the contents of RXB0 are read, further overrun errors will occur when receiving data.

(3) Baud rate generator control register 0 (BRGC0)

This register sets the serial clock for serial interface.

BRGC0 is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets BRGC0 to 00H.

Figure 16-5 shows the format of BRGC0.

Figure 16-5. Baud Rate Generator Control Register 0 (BRGC0) Format

Address: FFA2H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
BRGC0	0	TPS02	TPS01	TPS00	MDL03	MDL02	MDL01	MDL00

($f_x = 8.38 \text{ MHz}$)

TPS02	TPS01	TPS00	Source Clock Selection for 5-Bit Counter	n
0	0	0	P25/ASCK0	0
0	0	1	$f_x/2$	1
0	1	0	$f_x/2^2$	2
0	1	1	$f_x/2^3$	3
1	0	0	$f_x/2^4$	4
1	0	1	$f_x/2^5$	5
1	1	0	$f_x/2^6$	6
1	1	1	$f_x/2^7$	7

MDL03	MDL02	MDL01	MDL00	Input Clock Selection for Baud Rate Generator	k
0	0	0	0	$f_{sck}/16$	0
0	0	0	1	$f_{sck}/17$	1
0	0	1	0	$f_{sck}/18$	2
0	0	1	1	$f_{sck}/19$	3
0	1	0	0	$f_{sck}/20$	4
0	1	0	1	$f_{sck}/21$	5
0	1	1	0	$f_{sck}/22$	6
0	1	1	1	$f_{sck}/23$	7
1	0	0	0	$f_{sck}/24$	8
1	0	0	1	$f_{sck}/25$	9
1	0	1	0	$f_{sck}/26$	10
1	0	1	1	$f_{sck}/27$	11
1	1	0	0	$f_{sck}/28$	12
1	1	0	1	$f_{sck}/29$	13
1	1	1	0	$f_{sck}/30$	14
1	1	1	1	Setting prohibit	—

- Cautions**
1. Writing to BRGC0 during a communication operation may cause abnormal output from the baud rate generator and disable further communication operations. Therefore, do not write to BRGC0 during a communication operation.
 2. Set 10H to BRGC0 when using in infrared data transfer mode.

- Remarks**
1. f_{sck} : Source clock for 5-bit counter
 2. n : Value set via TPS00 to TPS02 ($0 \leq n \leq 7$)
 3. k : Value set via MDL00 to MDL03 ($0 \leq k \leq 14$)

16.4 Serial Interface Operations

This section explains the three modes of the serial interface (UART0).

16.4.1 Operation stop mode

Because serial transfer is not performed during this mode, the power consumption can be reduced. In addition, pins can be used as ordinary ports.

(1) Register settings

Operation stop mode are set by the asynchronous serial interface mode register 0 (ASIM0). ASIM0 is set by a 1-bit or 8-bit memory manipulation instruction. $\overline{\text{RESET}}$ input sets ASIM0 to 00H.

Address: FFA0H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ASIM0	TXE0	RXE0	PS01	PS00	CL0	SL0	ISRM0	IRDAM0

TXE0	RXE0	Operation Mode	RxD0/P23 Pin Function	TxD0/P24 Pin Function
0	0	Operation stop	Port function (P23)	Port function (P24)
0	1	UART mode (receive only)	Serial function (RxD0)	Serial function (TxD0)
1	0	UART mode (transmit only)	Port function (P23)	
1	1	UART mode (transmit and receive)	Serial function (RxD0)	

Caution Do not switch the operation mode until the current serial transmit/receive operation has stopped.

16.4.2 Asynchronous serial interface (UART) mode

This mode enables full-duplex operation wherein one byte of data after the start bit is transmitted or received.

The on-chip baud rate generator dedicated to UART enables communications using a wide range of selectable baud rates.

The UART baud rate generator can also be used to generate a MIDI-standard baud rate (31.25 kbps).

(1) Register settings

UART mode settings are performed by the asynchronous serial interface mode register 0 (ASIM0), asynchronous serial interface status register 0 (ASIS0), and the baud rate generator control register 0 (BRGC0).

(a) Asynchronous serial interface mode register 0 (ASIM0)

ASIM0 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ASIM0 to 00H.

Caution In UART mode, set the port mode register (PMXX) as follows. Set the output latch to 0.

- During receive operation
Set P23 (RXD0) to input mode (PM23 = 1)
- During transmit operation
Set P24 (TXD0) to output mode (PM24 = 0)
- During transmit/receive operation
Set P23 (RXD0) to input mode, and P24 to output mode

Address: FFA0H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
ASIM0	TXE0	RXE0	PS01	PS00	CL0	SL0	ISRM0	IRDAM0

TXE0	RXE0	Operation Mode	RxD0/P23 Pin Function	TxD0/P24 Pin Function
0	0	Operation stop	Port function (P23)	Port function (P24)
0	1	UART mode (receive only)	Serial function (RxD0)	
1	0	UART mode (transmit only)	Port function (P23)	Serial function (TxD0)
1	1	UART mode (transmit and receive)	Serial function (RxD0)	

PS01	PS00	Parity Bit Specification
0	0	No parity
0	1	Zero parity always added during transmission No parity detection during reception (parity errors do not occur)
1	0	Odd parity
1	1	Even parity

CL0	Character Length Specification
0	7 bits
0	8 bits

SL0	Stop Bit Length Specification for Transmit Data
0	1 bit
1	2 bits

ISRM0	Receive Completion Interrupt Control When Error Occurs
0	Receive completion interrupt request is issued when an error occurs
1	Receive completion interrupt request is not issued when an error occurs

IRDAM0	Operation Specified for Infrared Data Transfer Mode ^{Note 1}
0	UART (transmit/receive) mode
1	Infrared data transfer (transmit/receive) mode ^{Note 2}

- Notes**
1. The UART/infrared data transfer mode specification is controlled by TXE0 and RXE0.
 2. When using infrared data transfer mode, be sure to set the baud rate generator control register 0 (BRGC0) to 10H.

Caution Do not switch the operation mode until the current serial transmit/receive operation has stopped.

(b) Asynchronous serial interface status register 0 (ASIS0)

ASIS0 can be read by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets ASIS0 to 00H.

Address: FFA1H After Reset: 00H R

Symbol	7	6	5	4	3	2	1	0
ASIS0	0	0	0	0	0	PE0	FE0	OVE0

PE0	Parity Error Flag
0	No parity error
1	Parity error (Incorrect parity bit detected)

FE0	Framing Error Flag
0	No framing error
1	Framing error ^{Note 1} (Stop bit not detected)

OVE0	Overrun Error Flag
0	No overrun error
1	Overrun error ^{Note 2} (Next receive operation was completed before data was read from receive buffer register 0 (RXB0))

- Notes**
1. Even if a stop bit length is set to two bits by setting bit 2 (SL0) in the asynchronous serial interface mode register 0 (ASIM0), stop bit detection during a receive operation only applies to a stop bit length of 1 bit.
 2. Be sure to read the contents of the receive buffer register 0 (RXB0) when an overrun error has occurred.
Until the contents of RXB0 are read, further overrun errors will occur when receiving data.

(c) Baud rate generator control register 0 (BRGC0)

BRGC0 is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets BRGC0 to 00H.

Address: FFA2H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
BRGC0	0	TPS02	TPS01	TPS00	MDL03	MDL02	MDL01	MDL00

(fx = 8.38 MHz)

TPS02	TPS01	TPS00	Source Clock Selection for 5-Bit Counter	n
0	0	0	P25/ASCK0	0
0	0	1	$f_x/2$	1
0	1	0	$f_x/2^2$	2
0	1	1	$f_x/2^3$	3
1	0	0	$f_x/2^4$	4
1	0	1	$f_x/2^5$	5
1	1	0	$f_x/2^6$	6
1	1	1	$f_x/2^7$	7

MDL03	MDL02	MDL01	MDL00	Input Clock Selection for Baud Rate Generator	k
0	0	0	0	$f_{sck}/16$	0
0	0	0	1	$f_{sck}/17$	1
0	0	1	0	$f_{sck}/18$	2
0	0	1	1	$f_{sck}/19$	3
0	1	0	0	$f_{sck}/20$	4
0	1	0	1	$f_{sck}/21$	5
0	1	1	0	$f_{sck}/22$	6
0	1	1	1	$f_{sck}/23$	7
1	0	0	0	$f_{sck}/24$	8
1	0	0	1	$f_{sck}/25$	9
1	0	1	0	$f_{sck}/26$	10
1	0	1	1	$f_{sck}/27$	11
1	1	0	0	$f_{sck}/28$	12
1	1	0	1	$f_{sck}/29$	13
1	1	1	0	$f_{sck}/30$	14
1	1	1	1	Setting prohibit	—

- Cautions**
1. Writing to BRGC0 during a communication operation may cause abnormal output from the baud rate generator and disable further communication operations. Therefore, do not write to BRGC0 during a communication operation.
 2. Set 10H to BRGC0 when using infrared data transfer mode.

- Remarks**
1. f_{sck} : Source clock for 5-bit counter
 2. n : Value set via TPS00 to TPS02 ($0 \leq n \leq 7$)
 3. k : Value set via MDL00 to MDL03 ($0 \leq k \leq 14$)

The transmit/receive clock that is used to generate the baud rate is obtained by dividing the main system clock.

- Transmit/receive clock generation for baud rate by using main system clock
The main system clock is divided to generate the transmit/receive clock. The baud rate generated from the main system clock is determined according to the following formula.

$$[\text{Baud rate}] = \frac{f_x}{2^{n+1}(k + 16)} \text{ [Hz]}$$

f_x : Oscillation frequency of main system clock

When ASCK0 is selected as the source clock of the 5-bit counter, substitute the input clock frequency to ASCK0 pin for f_x in the above expression.

n : Value set via TPS00 to TPS02 ($0 \leq n \leq 7$)

For details, see **Table 16-2**.

k : Value set via MDL00 to MDL03 ($0 \leq k \leq 14$)

Table 16-2 shows the relationship between the 5-bit counter's source clock assigned to bits 4 to 6 (TPS00 to TPS02) of BRGC0 and the "n" value in the above formula.

Table 16-2. Relationship between 5-Bit Counter's Source Clock and "n" Value

TPS02	TPS01	TPS00	5-Bit Counter's Source Clock Selected	n
0	0	0	P25/ASCK0	0
0	0	1	$f_x/2$	1
0	1	0	$f_x/2^2$	2
0	1	1	$f_x/2^3$	3
1	0	0	$f_x/2^4$	4
1	0	1	$f_x/2^5$	5
1	1	0	$f_x/2^6$	6
1	1	1	$f_x/2^7$	7

Remark f_x : Oscillation frequency of main system clock

• **Error tolerance range for baud rates**

The tolerance range for baud rates depends on the number of bits per frame and the counter's division rate $[1/(16 + k)]$.

Table 16-3 describes the relationship between the main system clock and the baud rate and Figure 16-6 shows an example of a baud rate error tolerance range.

Table 16-3. Relationship between Main System Clock and Baud Rate

Baud Rate (bps)	f _x = 8.386 MHz		f _x = 8.000 MHz		f _x = 7.3728 MHz		f _x = 5.000 MHz		f _x = 4.1943 MHz	
	BRGC0	ERR (%)	BRGC0	ERR (%)	BRGC0	ERR (%)	BRGC0	ERR (%)	BRGC0	ERR (%)
600	–	–	–	–	–	–	–	–	7BH	1.14
1200	7BH	1.10	7AH	0.16	78H	0	70H	1.73	6BH	1.14
2400	6BH	1.10	6AH	0.16	68H	0	60H	1.73	5BH	1.14
4800	5BH	1.10	5AH	0.16	58H	0	50H	1.73	4BH	1.14
9600	4BH	1.10	4AH	0.16	48H	0	40H	1.73	3BH	1.14
19200	3BH	1.10	3AH	0.16	38H	0	30H	1.73	2BH	1.14
31250	31H	–1.3	30H	0	2DH	1.70	24H	0	21H	–1.3
38400	2BH	1.10	2AH	0.16	28H	0	20H	1.73	1BH	1.14
76800	1BH	1.10	1AH	0.16	18H	0	10H	1.73	–	–
115200	12H	1.10	11H	2.12	10H	0	–	–	–	–
Infrared data transfer mode ^{Note}	65536 bps		62500 bps		115200 bps		39063 bps		32768 bps	


Note The UART/infrared data transfer mode specification is controlled by TXE0 and RXE0.

When using the infrared data transfer mode, be sure to set the baud rate generator control register 0 (BRGC0) as follows.

- k = 0 (MDL0 to MDL3 = 0000)
- n = 1 (TPS00 to TPS02 = 001)

Remark f_x : Oscillation frequency of main system clock
 n : Value set via TPS00 to TPS02 (0 ≤ n ≤ 7)
 k : Value set via MDL00 to MDL03 (0 ≤ k ≤ 14)

Figure 16-6. Error Tolerance (when k = 0), Including Sampling Errors

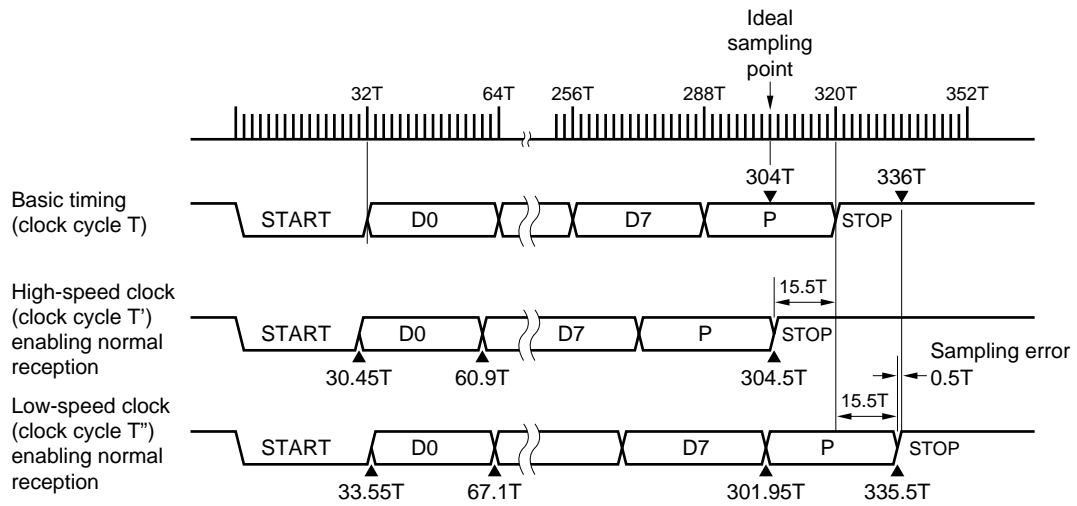


Remark T: 5-bit counter's source clock cycle

$$\text{Baud rate error tolerance (when } k = 0) = \frac{\pm 15.5}{320} \times 100 = 4.8438 \%$$

(2) Communication operations**(a) Data format**

Figure 16-7 shows the format of the transmit/receive data.

Figure 16-7. Format of Transmit/Receive Data in Asynchronous Serial Interface

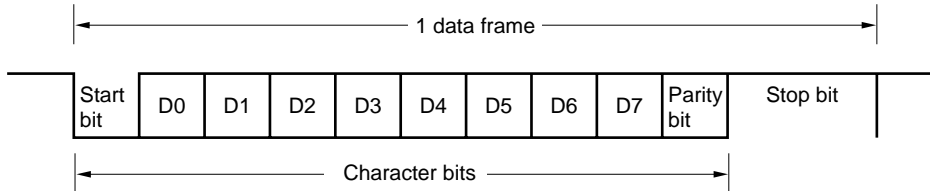

1 data frame consists of the following bits.

- Start bit 1 bit
- Character bits ... 7 bits or 8 bits
- Parity bit Even parity, odd parity, zero parity, or no parity
- Stop bit(s) 1 bit or 2 bits

The asynchronous serial interface mode register 0 (ASIM0) is used to set the character bit length, parity selection, and stop bit length within each data frame.

When “7 bits” is selected as the number of character bits, only the low-order 7 bits (bits 0 to 6) are valid, so that during a transmission the highest bit (bit 7) is ignored and during reception the highest bit (bit 7) must be set to “0”.

The ASIM0 and the baud rate generator control register 0 (BRGC0) are used to set the serial transfer rate. If a receive error occurs, information about the receive error can be recognized by reading the asynchronous serial interface status register 0 (ASIS0).

(b) Parity types and operations

The parity bit is used to detect bit errors in transfer data. Usually, the same type of parity bit is used by the transmitting and receiving sides. When odd parity or even parity is set, errors in the parity bit (the odd-number bit) can be detected. When zero parity or no parity is set, errors are not detected.

(i) Even parity

- During transmission

The number of bits in transmit data that includes a parity bit is controlled so that there are an even number of bits whose value is 1. The value of the parity bit is as follows.

If the transmit data contains an odd number of bits whose value is 1: the parity bit is "1"

If the transmit data contains an even number of bits whose value is 1: the parity bit is "0"

- During reception

The number of bits whose value is 1 is counted among the transfer data that include a parity bit, and a parity error occurs when the counted result is an odd number.

(ii) Odd parity

- During transmission

The number of bits in transmit data that includes a parity bit is controlled so that there is an odd number of bits whose value is 1. The value of the parity bit is as follows.

If the transmit data contains an odd number of bits whose value is 1: the parity bit is "0"

If the transmit data contains an even number of bits whose value is 1: the parity bit is "1"

- During reception

The number of bits whose value is 1 is counted among the transfer data that include a parity bit, and a parity error occurs when the counted result is an even number.

(iii) Zero parity

During transmission, the parity bit is set to "0" regardless of the transmit data.

During reception, the parity bit is not checked. Therefore, no parity errors will occur regardless of whether the parity bit is a "0" or a "1".

(iv) No parity

No parity bit is added to the transmit data.

During reception, receive data is regarded as having no parity bit. Since there is no parity bit, no parity errors will occur.

(c) Transmission


The transmit operation is started when transmit data is written to the transmit shift register 0 (TXS0). A start bit, parity bit, and stop bit(s) are automatically added to the data.

Starting the transmit operation shifts out the data in TXS0, thereby emptying TXS0, after which a transmit completion interrupt request (INTST0) is issued.


The timing of the transmit completion interrupt request is shown in Figure 16-8.

Figure 16-8. Timing of Asynchronous Serial Interface Transmit Completion Interrupt Request

(i) Stop bit length: 1 bit

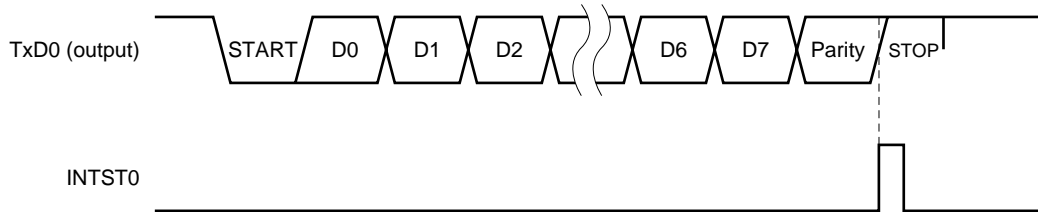

(ii) Stop bit length: 2 bits

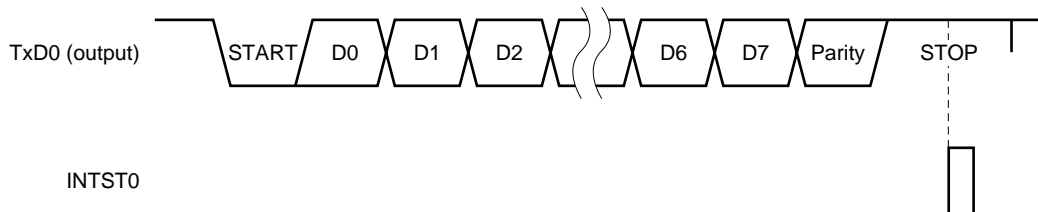

Caution Do not rewrite to the asynchronous serial interface mode register 0 (ASIM0) during a transmit operation. Rewriting ASIM0 register during a transmit operation may disable further transmit operations (in such cases, enter a RESET to restore normal operation). Whether or not a transmit operation is in progress can be determined via software using the transmit completion interrupt request (INTST0) or the interrupt request flag (STIF0) that is set by INTST0.

(d) Reception

The receive operation is enabled when “1” is set to bit 6 (RXE0) of the asynchronous serial interface mode register 0 (ASIM0), and input via the RxD0 pin is sampled.

The serial clock specified by ASIM0 is used to sample the RxD0 pin.

When the RxD0 pin goes low, the 5-bit counter of the baud rate generator begins counting and the start timing signal for data sampling is output when half of the specified baud rate time has elapsed. If sampling the RxD0 pin input with this start timing signal yields a low-level result, a start bit is recognized, after which the 5-bit counter is initialized and starts counting and data sampling begins. After the start bit is recognized, the character data, parity bit, and one-bit stop bit are detected, at which point reception of one data frame is completed.


Once reception of one data frame is completed, the receive data in the shift register is transferred to the receive buffer register 0 (RXB0) and a receive completion interrupt request (INTSR0) occurs.

Even if an error has occurred, the receive data in which the error occurred is still transferred to RXB0. When ASIM0 bit 1 (ISRM0) is cleared (0) upon occurrence of an error, INTSR0 occurs (see **Figure 16-10**). When ISRM0 bit is set (1), INTSR0 does not occur.

If the RXE0 bit is reset (to “0”) during a receive operation, the receive operation is stopped immediately. At this time, the contents of RXB0 and ASIS0 do not change, nor does INTSR0 or INTSER0 occur.

Figure 16-9 shows the timing of the asynchronous serial interface receive completion interrupt request.

Figure 16-9. Timing of Asynchronous Serial Interface Receive Completion Interrupt Request

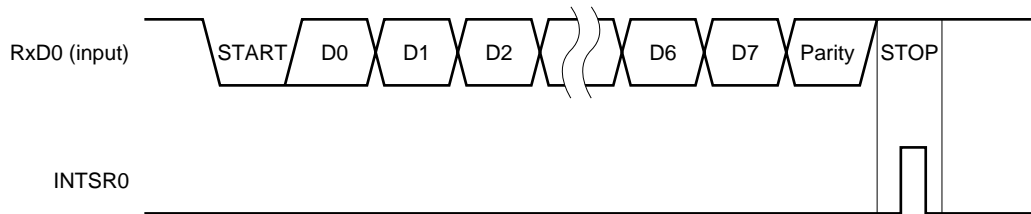

Caution Be sure to read the contents of the receive buffer register 0 (RXB0) even when a receive error has occurred. Overrun errors will occur during the next data receive operations and the receive error status will remain until the contents of RXB0 are read.

(e) Receive errors

Three types of errors can occur during a receive operation: parity error, framing error, or overrun error. If, as the result of data reception, an error flag is set to the asynchronous serial interface status register 0 (ASIS0), a receive error interrupt request (INTSER0) will occur. Receive error interrupts requests are generated before receiving completion interrupts request (INTSR0). Table 16-4 lists the causes behind receive errors.


As part of receive error interrupt request (INTSER0) servicing, the contents of ASIS0 can be read to determine which type of error occurred during the receive operation (see **Table 16-4** and **Figure 16-10**).

The contents of ASIS0 are reset (to “0”) when the receive buffer register 0 (RXB0) is read or when the next data is received (if the next data contains an error, its error flag will be set).

Table 16-4. Causes of Receive Errors

Receive Error	Cause	ASIS0 Value
Parity error	Parity specified during transmission does not match parity of receive data	04H
Framing error	Stop bit was not detected	02H
Overrun error	Reception of the next data was completed before data was read from the receive buffer register 0 (RXB0)	01H

Figure 16-10. Receive Error Timing

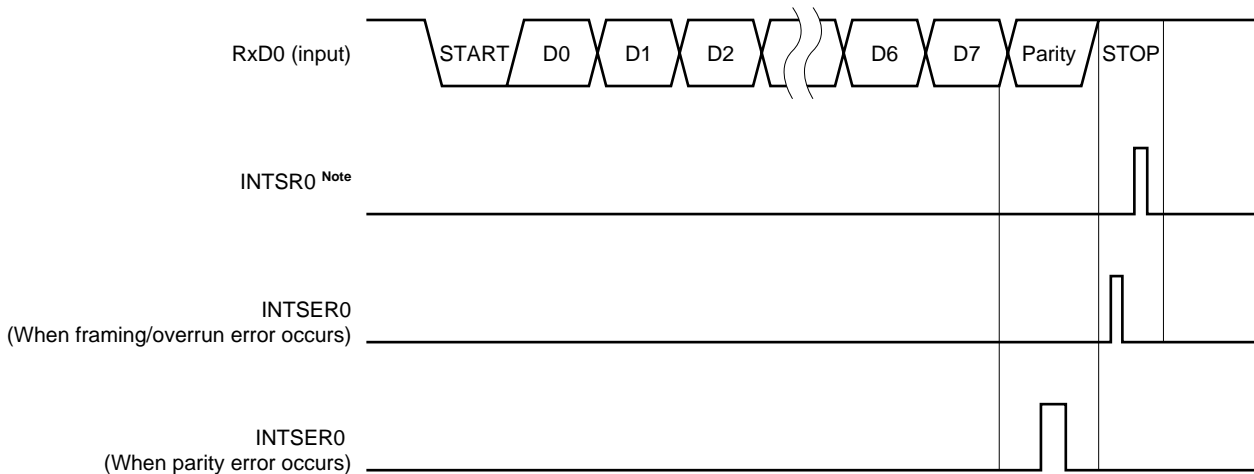

Note If a receive error occurs when ISRM0 bit has been set (1), INTSR0 does not occur.

- Cautions**
1. The contents of asynchronous serial interface status register 0 (ASIS0) are reset (to “0”) when the receive buffer register 0 (RXB0) is read or when the next data is received. To obtain information about the error, be sure to read the contents of ASIS0 before reading RXB0.
 2. Be sure to read the contents of the receive buffer register 0 (RXB0) even when a receive error has occurred. Overrun errors will occur during the next data receive operations and the receive error status will remain until the contents of RXB0 are read.

16.4.3 Infrared data transfer mode

In infrared data transfer mode, the following data format pulse output and pulse receiving are enabled. The relationship between the main system clock and baud rate is shown in Table 16-3.

(1) Data format

Figure 16-11 compares the data format used in UART mode with that used in infrared data transfer mode. The IR (infrared) frame corresponds to the bit string of the UART frame, which consists of pulses – a start bit, eight data bits, and a stop bit.

The length of the electrical pulses that are used to transmit and receive in an IR frame is $\frac{3}{16}$ the length of the cycle time for one bit (i.e., the “bit time”). This pulse (whose width is $\frac{3}{16}$ the length of one bit time) rises from the middle of the bit time (see the figure below).


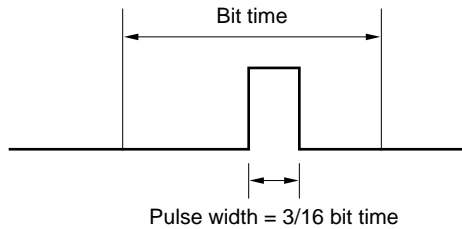


Figure 16-11. Data Format Comparison between Infrared Data Transfer Mode and UART Mode

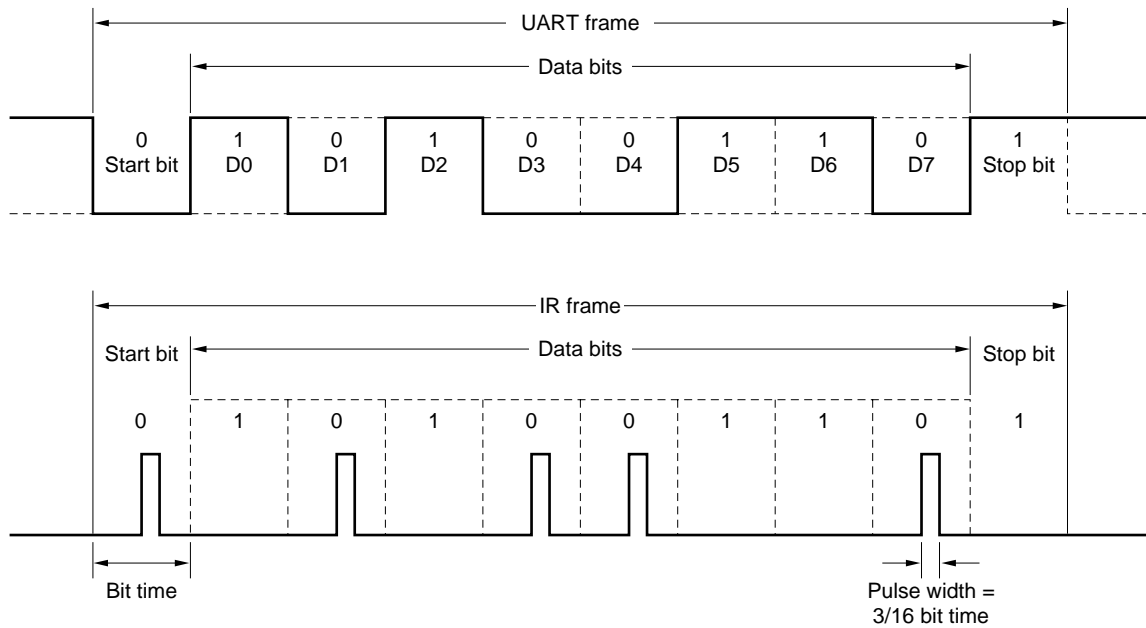

(2) Bit rate and pulse width

Table 16-5 lists bit rates, bit rate error tolerances, and pulse width values.

Table 16-5. Bit Rate and Pulse Width Values

Bit Rate (kbits/s)	Bit Rate Error Tolerance (% of bit rate)	Pulse Width Minimum Value (μ s) Note 2	3/16 Pulse Width <nominal value> (μ s)	Maximum Pulse Width (μ s)
115.2 Note 1	+/- 0.87	1.41	1.63	2.71

Notes 1. At the operation time with $f_x = 7.3728$ MHz


2. When a digital noise elimination circuit is used in a microcontroller operating at 1.41 MHz or above.

Caution When using the baud rate generator control register 0 (BRGC0) in infrared data transfer mode, set 10H to it.

Remark f_x : Main system clock oscillation frequency


(3) Input data and internal signals

• Transmit operation timing

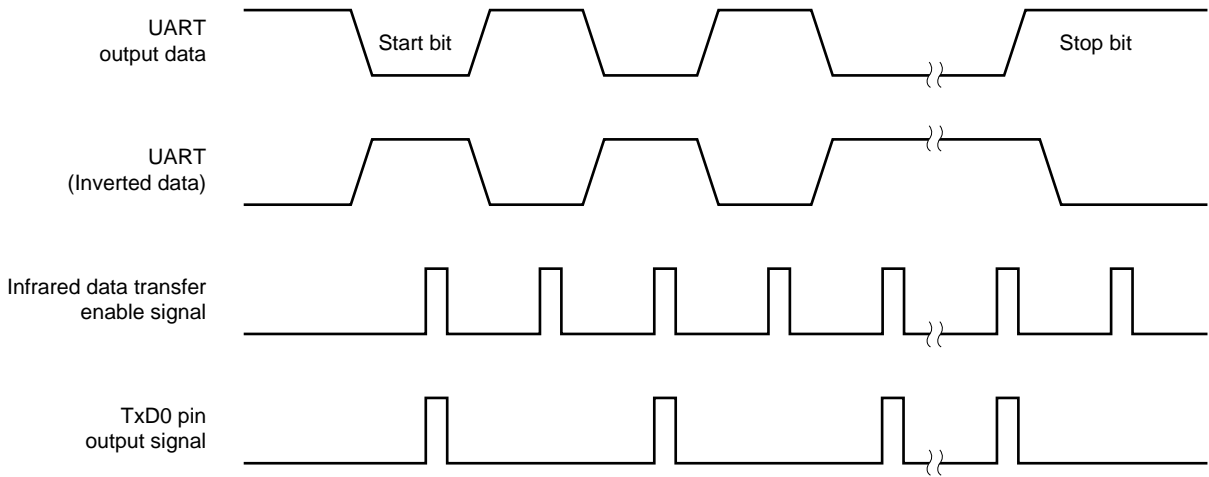

• Receive operation timing

Data reception is delayed for one-half of the specified baud rate.

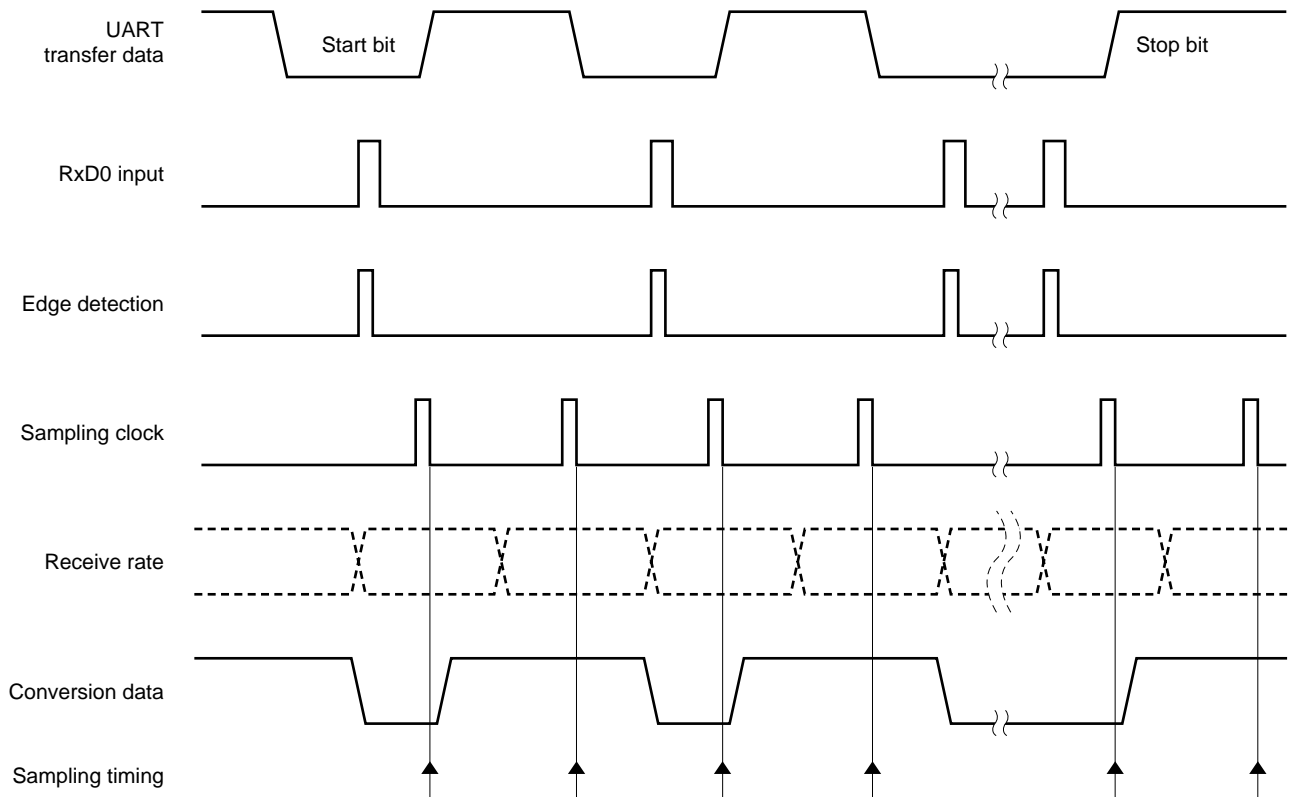

[MEMO]

CHAPTER 17 SERIAL INTERFACE (SIO3)

The serial interface (SIO3) incorporates two 3-wire serial I/O mode channels (SIO30, SIO31). These two channels have exactly the same functions.

Caution The μ PD780024AY and 780034AY Subseries products have the SIO30 only. They do not have the SIO31.

17.1 Serial Interface Functions

The serial interface (SIO3n) has the following two modes.

(1) Operation stop mode

This mode is used when serial transfers are not performed. For details, see 17.4.1 Operation stop mode.

(2) 3-wire serial I/O mode (fixed as MSB first)

This is an 8-bit data transfer mode using three lines: a serial clock line ($\overline{\text{SCK3n}}$), serial output line (SO3n), and serial input line (SI3n).

Since simultaneous transmit and receive operations are enabled in 3-wire serial I/O mode, the processing time for data transfers is reduced.


The first bit of the serial transferred 8-bit data is fixed as the MSB.

3-wire serial I/O mode is useful for connection to a peripheral I/O incorporating a clock-synchronous serial interface, or a display controller, etc. For details see 17.4.2 3-wire serial I/O mode.

Figure 17-1 shows a block diagram of the serial interface (SIO3n).

Remark n = 0, 1

Figure 17-1. Serial Interface (SIO3n) Block Diagram

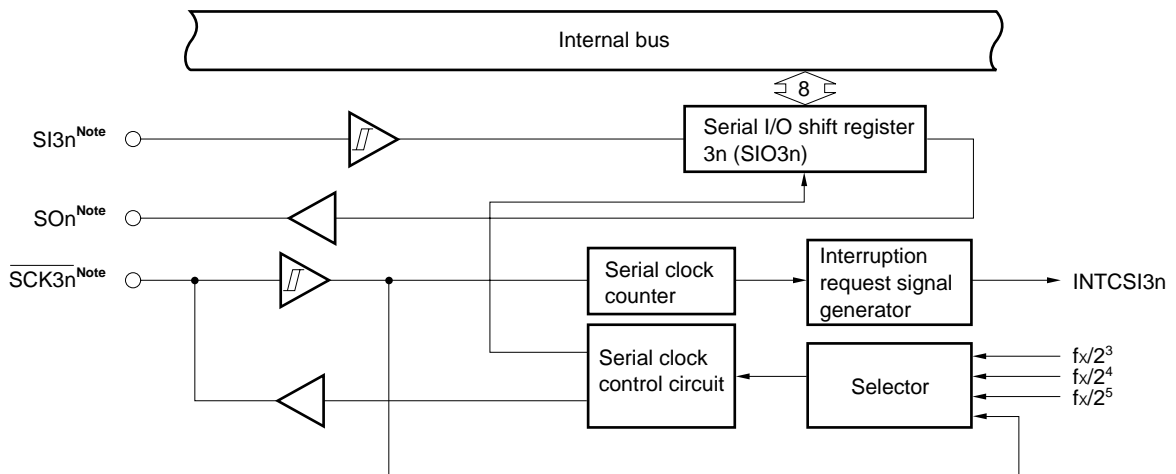

Note SI30, SO30, and $\overline{\text{SCK30}}$ are shared with P20, P21, and P22. SI31, SO31, and $\overline{\text{SCK31}}$ are shared with P34, P35, and P36.

Caution The μ PD780024AY and 780034AY Subseries products have SIO3 only. They do not have SIO31.

Remark n = 0, 1

17.2 Serial Interface Configuration

The serial interface (SIO3n) includes the following hardware.

Table 17-1. Serial Interface (SIO3n) Configuration

Item	Configuration
Register	Serial I/O shift register 3n (SIO3n)
Control register	Serial operation mode register 3n (CSIM3n)

Remark n = 0, 1

(1) Serial I/O shift register 3n (SIO3n)

This is an 8-bit register that performs parallel-serial conversion and serial transmit/receive (shift operations) synchronized with the serial clock.

SIO3n is set by an 8-bit memory manipulation instruction.

When "1" is set to bit 7 (CSIE3n) of the serial operation mode register 3n (CSIM3n), a serial operation can be started by writing data to or reading data from SIO3n.

When transmitting, data written to SIO3n is output to the serial output (SO3n).

When receiving, data is read from the serial input (SI3n) and written to SIO3n.

$\overline{\text{RESET}}$ input makes SIO3n undefined.

Caution Do not access SIO3n during a transmit operation unless the access is triggered by a transfer start. (Read operation is disabled when $\text{MODEn} = 0$ and write operation is disabled when $\text{MODEn} = 1$.)

Remark n = 0, 1

17.3 Register to Control Serial Interface

The serial interface (SIO3n) is controlled by serial operation mode register 3n (CSIM3n).

(1) Serial operation mode register 30 (CSIM30)

This register is used to enable or disable SIO30's serial clock, operation modes, and specific operations.

CSIM30 is set by a 1-bit or 8-bit memory manipulation instruction.

RESET input sets CSIM30 to 00H.

Caution In 3-wire serial I/O mode, set the port mode register (PMXX) as follows. Set the output latch of the port set to output mode (PMXX = 0) to 0.

<When SIO30 is used>

During serial clock output (master transmission or master reception)	PM22 = 0: Sets P22 ($\overline{\text{SCK30}}$) to output mode P22 = 0: Sets output latch of P22 to 0
During serial clock input (slave transmission or slave reception)	PM22 = 1: Sets P22 ($\overline{\text{SCK30}}$) to input mode
Transmit/receive mode	PM21 = 0: Sets P21 (SO30) to output mode P21 = 0: Sets output latch of P21 to 0
Receive mode	PM20 = 1: Sets P20 (SI30) to input mode

Figure 17-2. Serial Operation Mode Register 30 (CSIM30) Format

Address: FFB0H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
CSIM30	CSIE30	0	0	0	0	MODE0	SCL301	SCL300

CSIE30	Enable/Disable Specification for SIO30		
	Shift register operation	Serial counter	Port
0	Operation stop	Clear	Port function ^{Note 1}
1	Operation enable	Count operation enable	Serial function + port function ^{Note 2}

MODE0	Transfer Operation Modes and Flags		
	Operation mode	Transfer start trigger	SO30 output
0	Transmit/transmit and receive mode	Write to SIO30	Normal output
1	Receive-only mode	Read from SIO30	Fixed at low level

SCL301	SCL300	Clock Selection
0	0	External clock input to $\overline{SCK30}$
0	1	$f_x/2^3$ (1.05 MHz)
1	0	$f_x/2^4$ (524 kHz)
1	1	$f_x/2^5$ (262 kHz)

- Notes**
1. When CSIE30 = 0 (SIO30 operation stop status), the pins SI30, SO30, and $\overline{SCK30}$ can be used for port functions.
 2. When CSIE30 = 1 (SIO30 operation enabled state), the SI30 pin can be used as a port pin if only the send function is used, and the SO30 pin can be used as a port pin if only the receive-only mode is used.

- Remarks**
1. f_x : main system clock oscillation frequency
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz.

(2) Serial operation mode register 31 (CSIM31) (μ PD780024A, 780034A Subseries only)

This register is used to enable or disable SIO31's serial clock, operation modes, and specific operations.

CSIM31 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets CSIM31 to 00H.

Caution In 3-wire serial I/O mode, set the port mode register (PMXX) as follows. Set the output latch of the port set to output mode (PMXX = 0) to 0.

<When SIO31 is used>

During serial clock output (master transmission or master reception)	PM36 = 0: Sets P36 ($\overline{\text{SCK31}}$) to output mode P36 = 0: Sets output latch of P36 to 0
During serial clock input (slave transmission or slave reception)	PM36 = 1: Sets P36 ($\overline{\text{SCK31}}$) to input mode
Transmit/receive mode	PM35 = 0: Sets P35 (SO31) to output mode P35 = 0: Sets output latch of P35 to 0
Receive mode	PM34 = 1: Sets P34 (SI31) to input mode

Figure 17-3. Serial Operation Mode Register 31 (CSIM31) Format

Address: FFB8H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
CSIM31	CSIE31	0	0	0	0	MODE1	SCL311	SCL310

CSIE31	Enable/Disable Specification for SIO31		
	Shift register operation	Serial counter	Port
0	Operation stop	Clear	Port function ^{Note 1}
1	Operation enable	Count operation enable	Serial function + port function ^{Note 2}

MODE1	Transfer Operation Modes and Flags		
	Operation mode	Transfer start trigger	SO31 output
0	Transmit/transmit and receive mode	Write to SIO31	Normal output
1	Receive-only mode	Read from SIO31	Fixed at low level

SCL311	SCL310	Clock Selection
0	0	External clock input to $\overline{SCK31}$
0	1	$f_x/2^3$ (1.05 MHz)
1	0	$f_x/2^4$ (524 kHz)
1	1	$f_x/2^5$ (262 kHz)

- Notes**
1. When CSIE31 = 0 (SIO31 operation stop status), the pins SI31, SO31, and $\overline{SCK31}$ can be used for port functions.
 2. When CSIE31 = 1 (SIO31 operation enabled state), the SI31 pin can be used as a port pin if only the send function is used, and the SO31 pin can be used as a port pin if only the receive-only mode is used.

- Remarks**
1. f_x : main system clock oscillation frequency
 2. Figures in parentheses are for operation with $f_x = 8.38$ MHz.

17.4 Serial Interface Operations

This section explains on two modes of serial interface (SIO3n).

17.4.1 Operation stop mode

Because the serial transfer is not performed during this mode, the power consumption can be reduced. In addition, pins can be used as normal I/O ports.

(1) Register settings

Operation stop mode are set by the serial operation mode register 3n (CSIM3n). CSIM3n is set by a 1-bit or 8-bit memory manipulation instruction. $\overline{\text{RESET}}$ input sets CSIM3n to 00H.

Address: FFB0H (SIO30), FFB8H (SIO31) After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
CSIM3n	CSIE3n	0	0	0	0	MODEn	SCL3n1	SCL3n0

CSIE3n	SIO3n Operation Enable/Disable Specification		
	Shift register operation	Serial counter	Port
0	Operation stop	Clear	Port function ^{Note 1}
1	Operation enable	Count operation enable	Serial function + port function ^{Note 2}

- Notes**
1. When CSIE3n = 0 (SIO3n operation stop status), the pins SI3n, SO3n, and $\overline{\text{SCK3n}}$ can be used for port functions.
 2. When CSIE3n = 1 (SIO3n operation enabled state), the SI3n pin can be used as a port pin if only the send function is used, and the SO3n pin can be used as a port pin if only the receive-only mode is used.

Remark n = 0, 1

17.4.2 3-wire serial I/O mode

The 3-wire serial I/O mode is useful for connection to a peripheral I/O incorporating a clock-synchronous serial interface, a display controller, etc.

This mode executes data transfers via three lines: a serial clock line ($\overline{\text{SCK3n}}$), serial output line (SO3n), and serial input line (SI3n).

(1) Register settings

3-wire serial I/O mode is set by the serial operation mode register 3n (CSIM3n).

CSIM3n is set by a 1-bit or 8-bit memory manipulation instructions.

$\overline{\text{RESET}}$ input sets CSIM32 to 00H .

Caution In 3-wire serial I/O mode, set the port mode register (PMXX) as follows. Set the output latch of the port set to output mode (PMXX = 0) to 0.

<When SIO30 is used>

During serial clock output (master transmission or master reception)	PM22 = 0: Sets P22 ($\overline{\text{SCK30}}$) to output mode P22 = 0: Sets output latch of P22 to 0
During serial clock input (slave transmission or slave reception)	PM22 = 1: Sets P22 ($\overline{\text{SCK30}}$) to input mode
Transmit/receive mode	PM21 = 0: Sets P21 (SO30) to output mode P21 = 0: Sets output latch of P21 to 0
Receive mode	PM20 = 1: Sets P20 (SI30) to input mode

<When SIO31 is used>

During serial clock output (master transmission or master reception)	PM36 = 0: Sets P36 ($\overline{\text{SCK31}}$) to output mode P36 = 0: Sets output latch of P36 to 0
During serial clock input (slave transmission or slave reception)	PM36 = 1: Sets P36 ($\overline{\text{SCK31}}$) to input mode
Transmit/receive mode	PM35 = 0: Sets P35 (SO31) to output mode P35 = 0: Sets output latch of P35 to 0
Receive mode	PM34 = 1: Sets P34 (SI31) to input mode

Address: FFB0H (SIO30), FFB8H (SIO31) After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
CSIM3n	CSIE30	0	0	0	0	MODEn	SCL3n1	SCL3n0

CSIE3n	Enable/Disable Specification for SIO3n		
	Shift register operation	Serial counter	Port
0	Operation stop	Clear	Port function ^{Note 1}
1	Operation enable	Count operation enable	Serial function + port function ^{Note 2}

MODEn	Transfer Operation Modes and Flags		
	Operation mode	Transfer start trigger	SO3n output
0	Transmit/transmit and receive mode	Write to SIO3n	Normal output
1	Receive-only mode	Read from SIO3n	Fixed at low level

SCL3n1	SCL3n0	Clock Selection
0	0	External clock input to $\overline{SCK3n}$
0	1	$f_x/2^3$ (1.05 MHz)
1	0	$f_x/2^4$ (524 kHz)
1	1	$f_x/2^5$ (262 kHz)

- Notes**
- When CSIE3n = 0 (SIO3n operation stop status), the pins SI3n, SO3n, and $\overline{SCK3n}$ can be used for port functions.
 - When CSIE3n = 1 (SIO3n operation enabled state), the SI3n pin can be used as a port pin if only the send function is used, and the SO3n pin can be used as a port pin if only the receive-only mode is used.

- Remarks**
- n = 0, 1
 - f_x : Main system clock oscillation frequency
 - Figures in parentheses are for operation with $f_x = 8.38$ MHz.


(2) Communication Operations

In the three-wire serial I/O mode, data is transmitted and received in 8-bit units. Each bit of data is sent or received in synchronization with the serial clock.

The serial I/O shift register 3n (SIO3n) is shifted in synchronization with the falling edge of the serial clock. Transmission data is held in the SO3n latch and is output from the SO3n pin. Data that is received via the SI3n pin in synchronization with the rising edge of the serial clock is latched to SIO3n.

Completion of an 8-bit transfer automatically stops operation of SIO3n and sets interrupt request flag (CSIF3n).

Figure 17-4. Timing of 3-Wire Serial I/O Mode

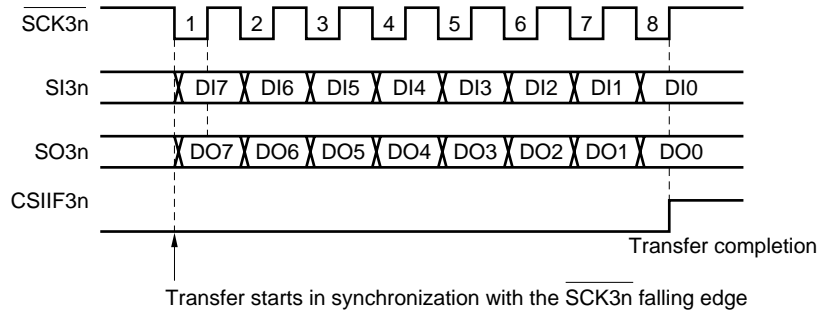

Remark n = 0, 1

(3) Transfer start

A serial transfer starts when the following two conditions have been satisfied and transfer data has been set (or read) to serial I/O shift register 3n (SIO3n).

- The SIO3n operation control bit (CSIE3n) = 1
- After an 8-bit serial transfer, either the internal serial clock is stopped or $\overline{\text{SCK3n}}$ is set to high level.
- Transmit/transmit and receive mode
When CSIE3n = 1 and MODEn = 0, transfer starts when writing to SIO3n.
- Receive-only mode
When CSIE3n = 1 and MODEn = 1, transfer starts when reading from SIO3n.

Caution After data has been written to SIO3n, transfer will not start even if the CSIE3n bit value is set to “1”.

Completion of an 8-bit transfer automatically stops the serial transfer operation and interrupt request flag (CSIF3n) is set.

Remark n = 0, 1

CHAPTER 18 SERIAL INTERFACE (IIC0) (μ PD780024AY, 780034AY SUBSERIES ONLY)

18.1 Serial Interface Functions

The serial interface (IIC0) has the following two modes.

(1) Operation stop mode

This mode is used when serial transfers are not performed. It can therefore be used to reduce power consumption.

(2) I²C bus mode (multimaster supported)

This mode is used for 8-bit data transfers with several devices via two lines: a serial clock (SCL0) line and a serial data bus (SDA0) line.

This mode complies with the I²C bus format and can output “start condition”, “data”, and “stop condition” data segments when transmitting via the serial data bus. These data segments are automatically detected by hardware during reception.

Since SCL0 and SDA0 are open-drain outputs, the IIC0 requires pull-up resistors for the serial clock line (SCL0) and the serial data bus line (SDA0).

Figure 18-1 shows a block diagram of serial interface (IIC0).

Figure 18-1. Serial Interface (IIC0) Block Diagram


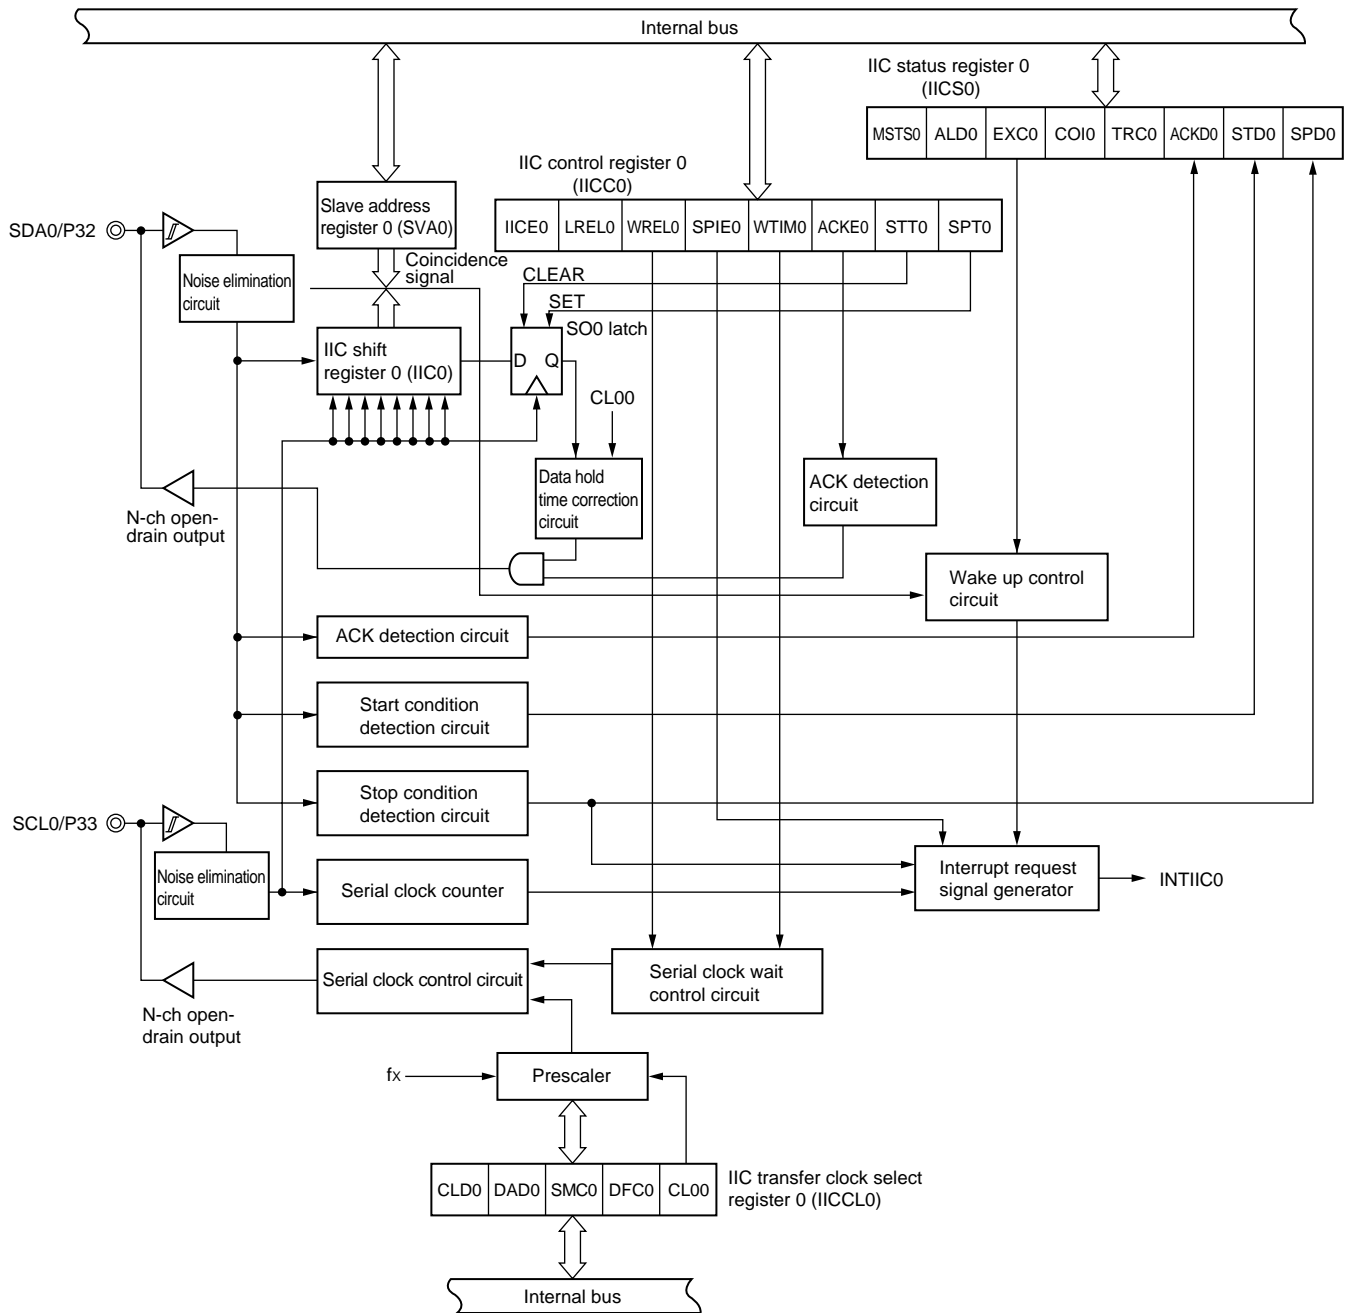


Figure 18-2 shows a serial bus configuration example.

Figure 18-2. Serial Bus Configuration Example Using I²C Bus

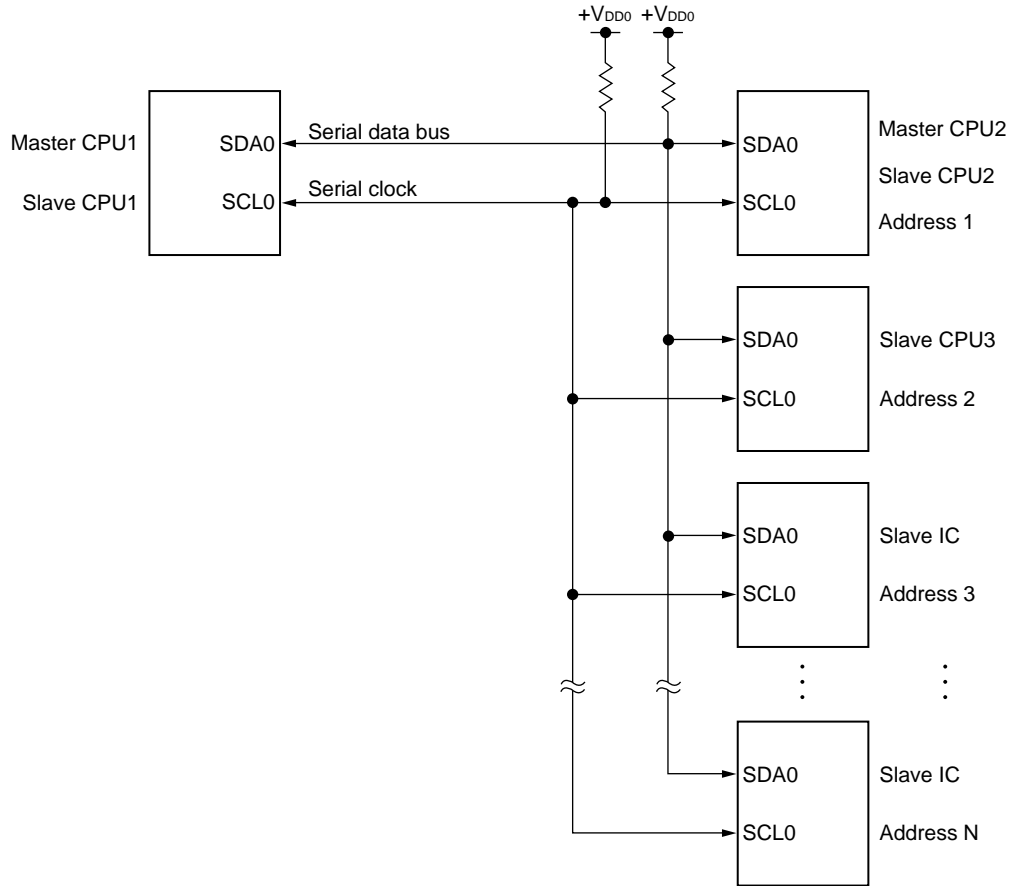

18.2 Serial Interface Configuration

The serial interface (IIC0) includes the following hardware.

Table 18-1. Serial Interface (IIC0) Configuration

Item	Configuration
Registers	IIC shift register 0 (IIC0) Slave address register 0 (SVA0)
Control registers	IIC control register 0 (IICC0) IIC status register 0 (IICS0) IIC transfer clock select register 0 (IICCL0)

(1) IIC shift register 0 (IIC0)

IIC0 is used to convert 8-bit serial data to 8-bit parallel data and to convert 8-bit parallel data to 8-bit serial data.

IIC0 can be used for both transmission and reception.

Write and read operations to IIC0 are used to control the actual transmit and receive operations.

IIC0 is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets the IIC0 00H.

(2) Slave address register 0 (SVA0)

This register sets local addresses when in slave mode.

SVA0 is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets SVA0 to 00H.

(3) SO0 latch

The SO0 latch is used to retain the SDA0 pin's output level.

(4) Wake-up control circuit

This circuit generates an interrupt request when the address received by this register matches the address value set to the slave address register 0 (SVA0) or when an extension code is received.

(5) Clock selector

This selects the sampling clock to be used.

(6) Serial clock counter

This counter counts the serial clocks that are output or input during transmit/receive operations and is used to verify that 8-bit data was sent or received.

(7) Interrupt request signal generator

This circuit controls the generation of interrupt request signals (INTIIC0).

An I²C interrupt request is generated following either of two triggers.

- Eighth or ninth clock of the serial clock (set by WTIM0 bit) **Note**
- Interrupt request generated when a stop condition is detected (set by SPIE0 bit) **Note**

Note WTIM0 bit : Bit 3 of the IIC control register 0 (IICC0)

SPIE0 bit : Bit 4 of the IIC control register 0 (IICC0)

(8) Serial clock control circuit

During master mode, this circuit generates the clock output via the SCL0 pin from a sampling clock.

(9) Serial clock wait control circuit

This circuit controls the wait timing.

(10) ACK output circuit, stop condition detection circuit, start condition detection circuit, and ACK detection circuit

These circuits are used to output and detect various control signals.

(11) Data hold time correction circuit

This circuit generates the hold time for data corresponding to the falling edge of the serial clock.

18.3 Registers to Control Serial Interface

Serial interface (IIC0) is controlled via three types of registers.

- IIC control register 0 (IICC0)
- IIC status register 0 (IICS0)
- IIC transfer clock select register 0 (IICCL0)

The following registers are also used.

- IIC shift register 0 (IIC0)
- Slave address register 0 (SVA0)

(1) IIC control register 0 (IICC0)

This register is used to enable/disable I²C operations, set wait timing, and set other I²C operations.

IICC0 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets IICC0 to 00H.

Caution In I²C bus mode, set the port mode register (PMXX) as follows. Set the output latch to 0.

- Set P32 (SDA0) to output mode (PM32 = 0)
- Set P33 (SCL0) to output mode (PM33 = 0)

Figure 18-3. IIC Control Register 0 (IICC0) Format (1/3)

Address: FFA8H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
IICC0	IICE0	LRELO	WRELO	SPIE0	WTIM0	ACKE0	STT0	SPT0

IICE0	I ² C Operation Enable
0	Stops operation. Presets IIC status register 0 (IICS0). Stops internal operation.
1	Enables operation.
Condition for clearing (IICE0 = 0)	
<ul style="list-style-type: none"> • Cleared by instruction • When $\overline{\text{RESET}}$ is input 	
Condition for setting (IICE0 = 1)	
<ul style="list-style-type: none"> • Set by instruction 	

LRELO	Exit from Communications
0	Normal operation
1	This exits from the current communications operation and sets standby mode. This setting is automatically cleared after being executed. Its uses include cases in which a locally irrelevant extension code has been received. The SCL0 and SDA0 lines go into the high impedance state. The following flags are cleared. • STD0 • ACKD0 • TRC0 • COI0 • EXC0 • MST0 • STT0 • SPT0
The standby mode following exit from communications remains in effect until the following communications entry conditions are met.	
<ul style="list-style-type: none"> • After a stop condition is detected, restart is in master mode. • An address match or extension code reception occurs after the start condition. 	
Condition for clearing (LRELO = 0) Note	
<ul style="list-style-type: none"> • Automatically cleared after execution • When $\overline{\text{RESET}}$ is input 	
Condition for setting (LRELO = 1)	
<ul style="list-style-type: none"> • Set by instruction 	

WRELO	Cancel Wait
0	Does not cancel wait
1	Cancels wait. This setting is automatically cleared after wait is canceled.
When WRELO is set (wait released) during the wait period at the ninth clock pulse in transmission status (TRC0 = 1), the SDA0 line goes into the high impedance state (TRC0 = 0).	
Condition for clearing (WRELO = 0) Note	
<ul style="list-style-type: none"> • Automatically cleared after execution • When $\overline{\text{RESET}}$ is input 	
Condition for setting (WRELO = 1)	
<ul style="list-style-type: none"> • Set by instruction 	

SPIE0	Enable/Disable Generation of Interrupt Request When Stop Condition Is Detected
0	Disable
1	Enable
Condition for clearing (SPIE0 = 0) Note	
<ul style="list-style-type: none"> • Cleared by instruction • When $\overline{\text{RESET}}$ is input 	
Condition for setting (SPIE0 = 1)	
<ul style="list-style-type: none"> • Set by instruction 	

Note This flag's signal is invalid when IICE0 = 0.

Figure 18-3. IIC Control Register 0 (IIC0) Format (2/3)

WTIM0	Control of Wait and Interrupt Request Generation
0	Interrupt request is generated at the eighth clock's falling edge. Master mode : After output of eight clocks, clock output is set to low level and wait is set. Slave mode : After input of eight clocks, the clock is set to low level and wait is set for master device.
1	Interrupt request is generated at the ninth clock's falling edge. Master mode : After output of nine clocks, clock output is set to low level and wait is set. Slave mode : After input of nine clocks, the clock is set to low level and wait is set for master device.
This bit's setting is invalid during an address transfer and is valid after the transfer is completed. When in master mode, a wait is inserted at the falling edge of the ninth clock during address transfers. For a slave device that has received a local address, a wait is inserted at the falling edge of the ninth clock after an ACK signal is issued. When the slave device has received an extension code, a wait is inserted at the falling edge of the eighth clock.	
Condition for clearing (WTIM0 = 0) Note	
<ul style="list-style-type: none"> • Cleared by instruction • When $\overline{\text{RESET}}$ is input 	Condition for setting (WTIM0 = 1)
<ul style="list-style-type: none"> • Set by instruction 	

ACKE0	Acknowledge Control
0	Disable acknowledge.
1	Enable acknowledge. During the ninth clock period, the SDA0 line is set to low level. However, the ACK is invalid during address transfers and is valid when EXC0 = 1.
Condition for clearing (ACKE0 = 0) Note	
<ul style="list-style-type: none"> • Cleared by instruction • When $\overline{\text{RESET}}$ is input 	Condition for setting (ACKE0 = 1)
<ul style="list-style-type: none"> • Set by instruction 	

STT0	Start Condition Trigger
0	Does not generate a start condition.
1	When bus is released (during STOP mode): Generates a start condition (for starting as master). The SDA0 line is changed from high level to low level and then the start condition is generated. Next, after the rated amount of time has elapsed, SCL0 is changed to low level. When bus is not used: This trigger functions as a start condition reserve flag. When set, it releases the bus and then automatically generates a start condition. Wait status (during master mode): Generates a restart condition after wait is released.
Cautions concerning set timing	
<ul style="list-style-type: none"> • For master reception : Cannot be set during transfer. Can be set only at the waiting period when ACKEO has been set to 0 and slave has been notified of final reception. • For master transmission : A start condition may not be generated normally during the ACK period. Therefore, set it during the waiting period. • Cannot be set at the same time as SPT0 	
Condition for clearing (STT0 = 0) Note	
<ul style="list-style-type: none"> • Cleared by instruction • Cleared by loss in arbitration • Cleared after start condition is generated by master device • When $\text{LREL0} = 1$ • When $\overline{\text{RESET}}$ is input 	Condition for setting (STT0 = 1)
<ul style="list-style-type: none"> • Set by instruction 	

Note This flag's signal is invalid when IICE0 = 0.

Figure 18-3. IIC Control Register 0 (IICC0) Format (3/3)

SPT0	Stop Condition Trigger
0	Stop condition is not generated.
1	Stop condition is generated (termination of master device's transfer). After the SDA0 line goes to low level, either set the SCL0 line to high level or wait until it goes to high level. Next, after the rated amount of time has elapsed, the SDA0 line changes from low level to high level and a stop condition is generated.
Cautions concerning set timing <ul style="list-style-type: none"> For master reception : Cannot be set during transfer. Can be set only at the waiting period when ACKE0 has been set to 0 and slave has been notified of final reception. For master transmission: A stop condition cannot be generated normally during the ACK0 period. Therefore, set it during the waiting period. Cannot be set at the same time as STT0. SPT0 can be set only when in master mode. Note 1 When WTIM0 has been set to 0, if SPT0 is set during the wait period that follows output of eight clocks, note that a stop condition will be generated during the high level period of the ninth clock. When a ninth clock must be output, WTIM0 should be changed from 0 to 1 during the wait period following output of eight clocks, and SPT0 should be set during the wait period that follows output of the ninth clock. 	
Condition for clearing (SPT0 = 0) Note 2	
<ul style="list-style-type: none"> Cleared by instruction Cleared by loss in arbitration Automatically cleared after stop condition is detected When LREL0 = 1 When $\overline{\text{RESET}}$ is input 	Condition for setting (SPT0 = 1) <ul style="list-style-type: none"> Set by instruction

Notes 1. Set SPT0 only during master mode. However, you must set SPT0 and generate a stop condition before the first stop condition is detected following the switch to operation enable status. For details, see **18.5.15 Other cautions.**

2. This flag's signal is invalid when IICE0 = 0.

Caution When bit 3 (TRC0) of the IIC status register 0 (IICS0) is set to "1", WREL0 is set during the ninth clock and wait is canceled, after which TRC0 is cleared and the SDA0 line is set for high impedance.

Remarks 1. STD0 : Bit 1 of IIC status register 0 (IICS0)
ACKD0 : Bit 2 of IIC status register 0 (IICS0)
TRC0 : Bit 3 of IIC status register 0 (IICS0)
COI0 : Bit 4 of IIC status register 0 (IICS0)
EXC0 : Bit 5 of IIC status register 0 (IICS0)
MSTS0 : Bit 7 of IIC status register 0 (IICS0)

2. Bits 0 and 1 (SPT0, STT0) become 0 when they are read after data setting.

(2) IIC status register 0 (IICS0)

This register indicates the status of the I²C.

IICS0 is set by a 1-bit or 8-bit memory manipulation instruction. IICS00 is a read-only register.

$\overline{\text{RESET}}$ input sets the value to 00H.

Figure 18-4. IIC Status Register 0 (IICS0) Format (1/3)

Address: FFA9H After Reset: 00H R

Symbol	7	6	5	4	3	2	1	0
IICS0	MSTS0	ALD0	EXC0	COI0	TRC0	ACKD0	STD0	SPD0

MSTS0	Master Device Status
0	Slave device status or communication standby status
1	Master device communication status
Condition for clearing (MSTS0 = 0)	
<ul style="list-style-type: none"> • When a stop condition is detected • When ALD0 = 1 • Cleared by LREL0 = 1 • When IICE0 changes from 1 to 0 • When $\overline{\text{RESET}}$ is input 	
Condition for setting (MSTS0 = 1)	
<ul style="list-style-type: none"> • When a start condition is generated 	

ALD0	Detection of Arbitration Loss
0	This status means either that there was no arbitration or that the arbitration result was a "win".
1	This status indicates the arbitration result was a "loss". MSTS0 is cleared.
Condition for clearing (ALD0 = 0)	
<ul style="list-style-type: none"> • Automatically cleared after IICS0 is read Note • When IICE0 changes from 1 to 0 • When $\overline{\text{RESET}}$ is input 	
Condition for setting (ALD0 = 1)	
<ul style="list-style-type: none"> • When the arbitration result is a "loss". 	

EXC0	Detection of Extension Code Reception
0	Extension code was not received.
1	Extension code was received.
Condition for clearing (EXC0 = 0)	
<ul style="list-style-type: none"> • When a start condition is detected • When a stop condition is detected • Cleared by LREL0 = 1 • When IICE0 changes from 1 to 0 • When $\overline{\text{RESET}}$ is input 	
Condition for setting (EXC0 = 1)	
<ul style="list-style-type: none"> • When the high-order 4 bits of the received address data is either "0000" or "1111" (set at the rising edge of the eighth clock). 	

Note This register is also cleared when a bit manipulation instruction is executed for bits other than IICS0.

Figure 18-4. IIC Status Register 0 (IICS0) Format (2/3)

COI0	Detection of Matching Addresses	
0	Addresses do not match.	
1	Addresses match.	
Condition for clearing (COI0 = 0)		Condition for setting (COI0 = 1)
<ul style="list-style-type: none"> When a start condition is detected When a stop condition is detected Cleared by LREL0 = 1 When IICE0 changes from 1 to 0 When RESET is input 		<ul style="list-style-type: none"> When the received address matches the local address (SVA0) (set at the rising edge of the eighth clock).

TRC0	Detection of Transmit/Receive Status	
0	Receive status (other than transmit status). The SDA0 line is set for high impedance.	
1	Transmit status. The value in the SO0 latch is enabled for output to the SDA0 line (valid starting at the rising edge of the first byte's ninth clock).	
Condition for clearing (TRC0 = 0)		Condition for setting (TRC0 = 1)
<ul style="list-style-type: none"> When a stop condition is detected Cleared by LREL0 = 1 When IICE0 changes from 1 to 0 Cleared by WREL0 = 1^{Note} When ALD0 changes from 0 to 1 When RESET is input <p>Master</p> <ul style="list-style-type: none"> When "1" is output to the first byte's LSB (transfer direction specification bit) <p>Slave</p> <ul style="list-style-type: none"> When a start condition is detected When "0" is input by the first byte's LSB (transfer direction specification bit) When not used for communication 		<p>Master</p> <ul style="list-style-type: none"> When a start condition is generated <p>Slave</p> <ul style="list-style-type: none"> When "1" is input by the first byte's LSB (transfer direction specification bit)

ACKD0	Detection of ACK	
0	ACK was not detected.	
1	ACK was detected.	
Condition for clearing (ACKD0 = 0)		Condition for setting (ACKD0 = 1)
<ul style="list-style-type: none"> When a stop condition is detected At the rising edge of the next byte's first clock Cleared by LREL0 = 1 When IICE0 changes from 1 to 0 When RESET is input 		<ul style="list-style-type: none"> After the SDA0 line is set to low level at the rising edge of the SCL0's ninth clock

Note It is cleared by setting WREL0 during the wait period at the ninth clock.

Figure 18-4. IIC Status Register 0 (IICS0) Format (3/3)

STD0	Detection of Start Condition	
0	Start condition was not detected.	
1	Start condition was detected. This indicates that the address transfer period is in effect	
Condition for clearing (STD0 = 0)		Condition for setting (STD0 = 1)
<ul style="list-style-type: none"> • When a stop condition is detected • At the rising edge of the next byte's first clock following address transfer • Cleared by LREL0 = 1 • When IICE0 changes from 1 to 0 • When RESET is input 		<ul style="list-style-type: none"> • When a start condition is detected

SPD0	Detection of Stop Condition	
0	Stop condition was not detected.	
1	Stop condition was detected. The master device's communication was terminated and the bus was released.	
Condition for clearing (SPD0 = 0)		Condition for setting (SPD0 = 1)
<ul style="list-style-type: none"> • At the rising edge of the address transfer byte's first clock following setting of this bit and detection of a start condition • When IICE0 changes from 1 to 0 • When RESET is input 		<ul style="list-style-type: none"> • When a stop condition is detected

Remark LREL0 : Bit 6 of IIC control register 0 (IICC0)
IICE0 : Bit 7 of IIC control register 0 (IICC0)

(3) IIC transfer clock select register 0 (IICCL0)

This register is used to set the transfer clock for the I²C bus.

IICCL0 is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets IICCL0 to 00H.

Figure 18-5. IIC Transfer Clock Select Register 0 (IICCL0) Format (1/2)

Address: FFAAH After Reset: 00H R/W **Note**

Symbol	7	6	5	4	3	2	1	0
IICCL0	0	0	CLD0	DAD0	SMC0	DFC0	0	CL00

CLD0	Detection of SCL0 Line Level (valid only when IICE0 = 1)
0	SCL0 line was detected at low level.
1	SCL0 line was detected at high level.
Condition for clearing (CLD0 = 0)	
<ul style="list-style-type: none"> When the SCL0 line is at low level When IICE0 = 0 When $\overline{\text{RESET}}$ is input 	
Condition for setting (CLD0 = 1)	
<ul style="list-style-type: none"> When the SCL0 line is at high level 	

DAD0	Detection of SDA0 Line Level (valid only when IICE0 = 1)
0	SDA0 line was detected at low level.
1	SDA0 line was detected at high level.
Condition for clearing (DAD0 = 0)	
<ul style="list-style-type: none"> When the SDA0 line is at low level When IICE0 = 0 When $\overline{\text{RESET}}$ is input 	
Condition for setting (DAD0 = 1)	
<ul style="list-style-type: none"> When the SDA0 line is at high level 	

SMC0	Operation Mode Switching
0	Operation in standard mode
1	Operation in high-speed mode
Condition for clearing (SMC0 = 0)	
<ul style="list-style-type: none"> Cleared by instruction When $\overline{\text{RESET}}$ is input 	
Condition for setting (SMC0 = 1)	
<ul style="list-style-type: none"> Set by instruction 	

Note Bits 4 and 5 are read-only bits.

Figure 18-5. IIC Transfer Clock Select Register 0 (IICCL0) Format (2/2)

DFC0	Control of Digital Filter Operation ^{Note 1}	
0	Digital filter OFF	
1	Digital filter ON	

CL00	Selection of Transfer Rate	
	Standard mode	High-speed mode
0	$f_x/44$ ^{Note 2}	$f_x/24$ (350 kHz)
1	$f_x/86$ (97.5 kHz)	

- Notes**
1. The digital filter can be used when in high-speed mode. Response time is slower when the digital filter is used.
 2. Transfer rate in standard mode can only be used when f_x is less than 100 kHz.

Caution Stop serial transfer once before rewriting CL00 to other than the same value.

- Remarks**
1. IICE0: Bit 7 of IIC control register 0 (IICC0)
 2. f_x : Main system clock oscillation frequency
 3. Figures in parentheses are for operation with $f_x = 8.38$ MHz.

(4) IIC shift register 0 (IIC0)

This register is used for serial transmission/reception (shift operations) that are synchronized with the serial clock. It can be read from or written to in 8-bit units, but data should not be written to IIC0 during a data transfer.

Address: FF1FH After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
IIC0								

(5) Slave address register 0 (SVA0)

This register holds the I²C's slave addresses. It can be read from or written to in 8-bit units, but bit 0 is fixed to "0".

Address: FFABH After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
SVA0								0

18.4 I²C Bus Mode Functions


18.4.1 Pin configuration

The serial clock pin (SCL0) and serial data bus pin (SDA0) are configured as follows.

- (1) SCL0 This pin is used for serial clock input and output.
This pin is an N-ch open-drain output for both master and slave devices. Input is Schmitt input.
- (2) SDA0 This pin is used for serial data input and output.
This pin is an N-ch open-drain output for both master and slave devices. Input is Schmitt input.

Since outputs from the serial clock line and the serial data bus line are N-ch open drain outputs, an external pull-up resistor is required.


Figure 18-6. Pin Configuration Diagram

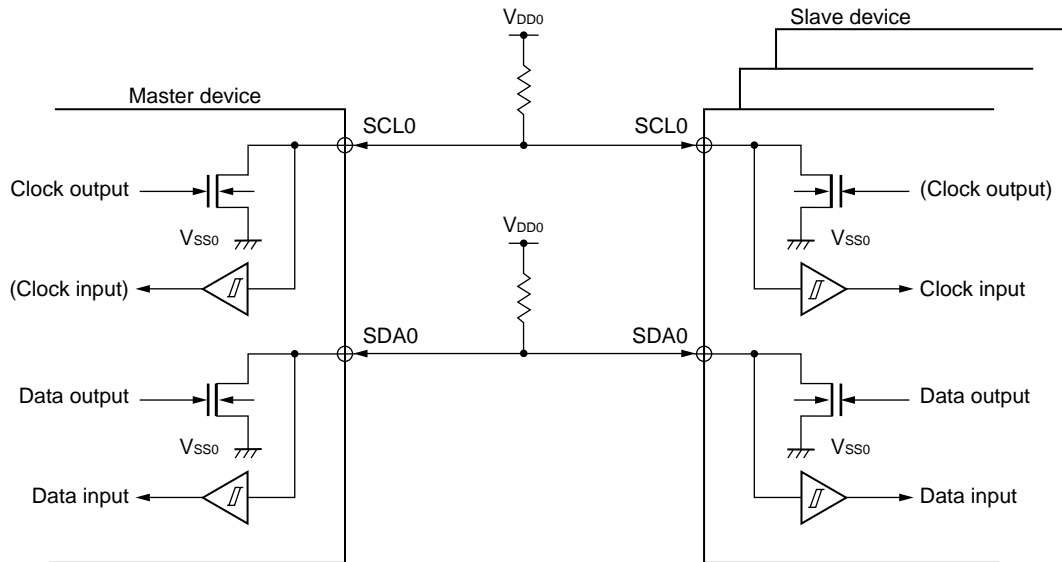

18.5 I²C Bus Definitions and Control Methods

The following section describes the I²C bus's serial data communication format and the signals used by the I²C bus. Figure 18-7 shows the transfer timing for the "start condition", "data", and "stop condition" output via the I²C bus's serial data bus.

Figure 18-7. I²C Bus Serial Data Transfer Timing

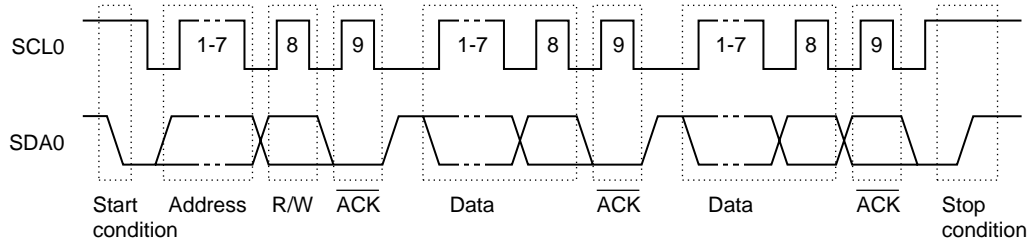

The master device outputs the start condition, slave address, and stop condition.


The acknowledge signal ($\overline{\text{ACK}}$) can be output by either the master or slave device (normally, it is output by the device that receives 8-bit data).

The serial clock (SCL0) is continuously output by the master device. However, in the slave device, the SCL0's low level period can be extended and a wait can be inserted.

18.5.1 Start conditions

A start condition is met when the SCL0 pin is at high level and the SDA0 pin changes from high level to low level. The start conditions for the SCL0 pin and SDA0 pin are signals that the master device outputs to the slave device when starting a serial transfer. The slave device includes hardware for detecting start conditions.

Figure 18-8. Start Conditions

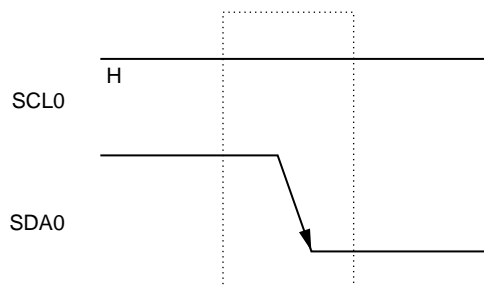

A start condition is output when the IIC control register 0 (IICC0)'s bit 1 (STT0) is set (to "1") after a stop condition has been detected (SPD0: Bit 0 = 1 in the IIC status register 0 (IICS0)). When a start condition is detected, IICS0's bit 1 (STD0) is set (to "1").


18.5.2 Addresses

The address is defined by the 7 bits of data that follow the start condition.

An address is a 7-bit data segment that is output in order to select one of the slave devices that are connected to the master device via bus lines. Therefore, each slave device connected via the bus lines must have a unique address.

The slave devices include hardware that detects the start condition and checks whether or not the 7-bit address data matches the data values stored in the slave address register 0 (SVA0). If the address data matches the SVA0 values, the slave device is selected and communicates with the master device until the master device transmits a start condition or stop condition.

Figure 18-9. Address

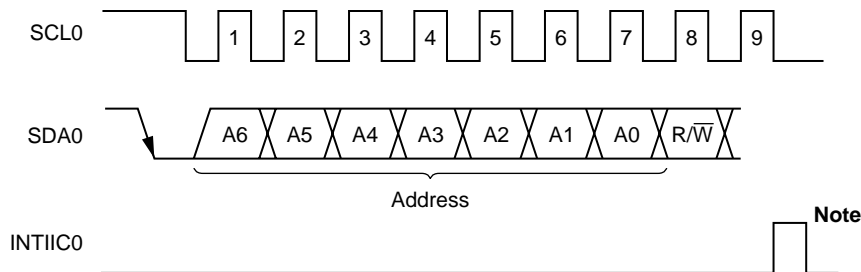

Note INTIIC0 is not issued if data other than a local address or extension code is received during slave device operation.


The slave address and the eighth bit, which specifies the transfer direction as described in **18.5.3 Transfer direction specification** below, are together written to the IIC shift register 0 (IIC0) and are then output. Received addresses are written to IIC0.

The slave address is assigned to the high-order 7 bits of IIC0.

18.5.3 Transfer direction specification

In addition to the 7-bit address data, the master device sends 1 bit that specifies the transfer direction. When this transfer direction specification bit has a value of "0", it indicates that the master device is transmitting data to a slave device. When the transfer direction specification bit has a value of "1", it indicates that the master device is receiving data from a slave device.

Figure 18-10. Transfer Direction Specification

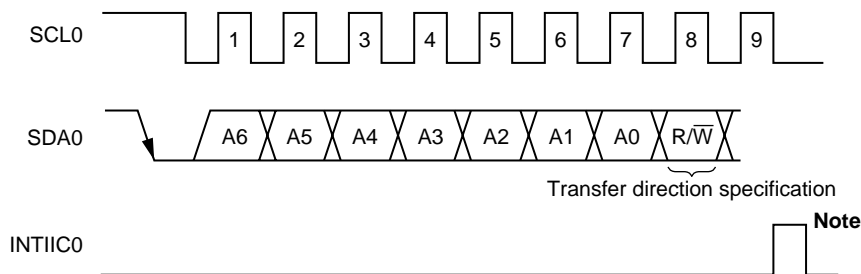

Note INTIIC0 is not issued if data other than a local address or extension code is received during slave device operation.

18.5.4 Acknowledge ($\overline{\text{ACK}}$) signal

The acknowledge ($\overline{\text{ACK}}$) signal is used by the transmitting and receiving devices to confirm serial data reception.

The receiving device returns one $\overline{\text{ACK}}$ signal for each 8 bits of data it receives. The transmitting device normally receives an $\overline{\text{ACK}}$ signal after transmitting 8 bits of data. However, when the master device is the receiving device, it does not output an $\overline{\text{ACK}}$ signal after receiving the final data to be transmitted. The transmitting device detects whether or not an $\overline{\text{ACK}}$ signal is returned after it transmits 8 bits of data. When an $\overline{\text{ACK}}$ signal is returned, the reception is judged as normal and processing continues. If the slave device does not return an $\overline{\text{ACK}}$ signal, the master device outputs either a stop condition or a restart condition and then stops the current transmission. Failure to return an $\overline{\text{ACK}}$ signal may be caused by the following two factors.

- (a) Reception was not performed normally.
- (b) The final data was received.

When the receiving device sets the SDA0 line to low level during the ninth clock, the $\overline{\text{ACK}}$ signal becomes active (normal receive response).


When bit 2 (ACKE0) of the IIC control register 0 (IICCR0) is set to 1, automatic $\overline{\text{ACK}}$ signal generation is enabled.

Transmission of the eighth bit following the 7 address data bits causes bit 3 (TRC0) of the IIC status register 0 (IICSR0) to be set. When this TRC0 bit's value is "0", it indicates receive mode. Therefore, ACEK0 should be set to "1".

When the slave device is receiving (when TRC0 = 0), if the slave device does not need to receive any more data after receiving several bytes, setting ACEK0 to "0" will prevent the master device from starting transmission of the subsequent data.

Similarly, when the master device is receiving (when TRC0 = 0) and the subsequent data is not needed and when either a restart condition or a stop condition should therefore be output, setting ACEK0 to "0" will prevent the $\overline{\text{ACK}}$ signal from being returned. This prevents the MSB data from being output via the SDA line (i.e., stops transmission) during transmission from the slave device.

Figure 18-11. $\overline{\text{ACK}}$ Signal

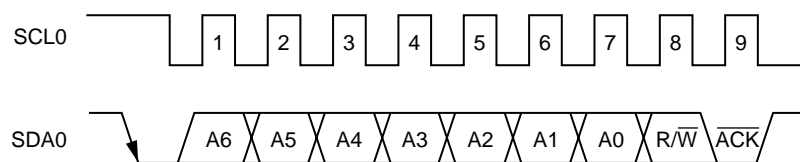

When the local address is received, an $\overline{\text{ACK}}$ signal is automatically output in sync with the falling edge of the SCL's eighth clock regardless of the ACEK0 value. No $\overline{\text{ACK}}$ signal is output if the received address is not a local address.

The $\overline{\text{ACK}}$ signal output method during data reception is based on the wait timing setting, as described below.


- When 8-clock wait is selected : $\overline{\text{ACK}}$ signal is output when ACEK0 is set to "1" before wait cancellation.
- When 9-clock wait is selected : $\overline{\text{ACK}}$ signal is automatically output at the falling edge of the SCL0's eighth clock if ACEK0 has already been set to "1".

18.5.5 Stop condition

When the SCL0 pin is at high level, changing the SDA0 pin from low level to high level generates a stop condition.

A stop condition is a signal that the master device outputs to the slave device when serial transfer has been completed. The slave device includes hardware that detects stop conditions.

Figure 18-12. Stop Condition

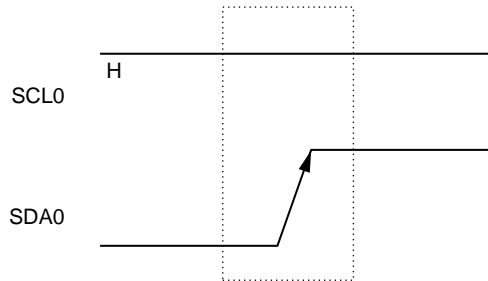

A stop condition is generated when bit 0 (SPT0) of the IIC control register 0 (IICC0) is set (to "1"). When the stop condition is detected, bit 0 (SPD0) of the IIC status register 0 (IICS0) is set (to "1") and INTIIC0 is generated when bit 4 (SPIE0) of IICC0 is set (to "1").

18.5.6 Wait signal ($\overline{\text{WAIT}}$)

The wait signal ($\overline{\text{WAIT}}$) is used to notify the communication partner that a device (master or slave) is preparing to transmit or receive data (i.e., is in a wait state).

Setting the SCL0 pin to low level notifies the communication partner of the wait status. When wait status has been canceled for both the master and slave devices, the next data transfer can begin.

Figure 18-13. Wait Signal (1/2)

(1) When master device has a nine-clock wait and slave device has an eight-clock wait (master transmits, slave receives, and $\text{ACK}E0 = 1$)


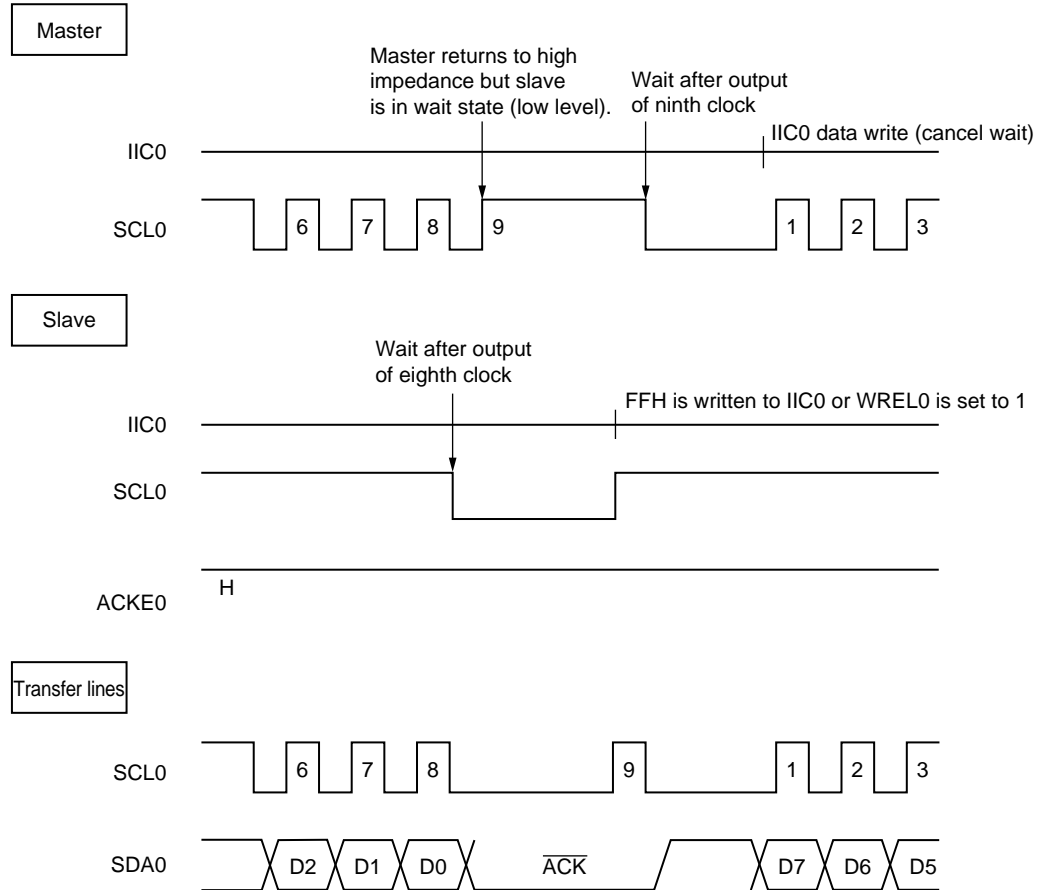


Figure 18-13. Wait Signal (2/2)

(2) When master and slave devices both have a nine-clock wait (master device transmits, slave receives, and ACKE0 = 1)

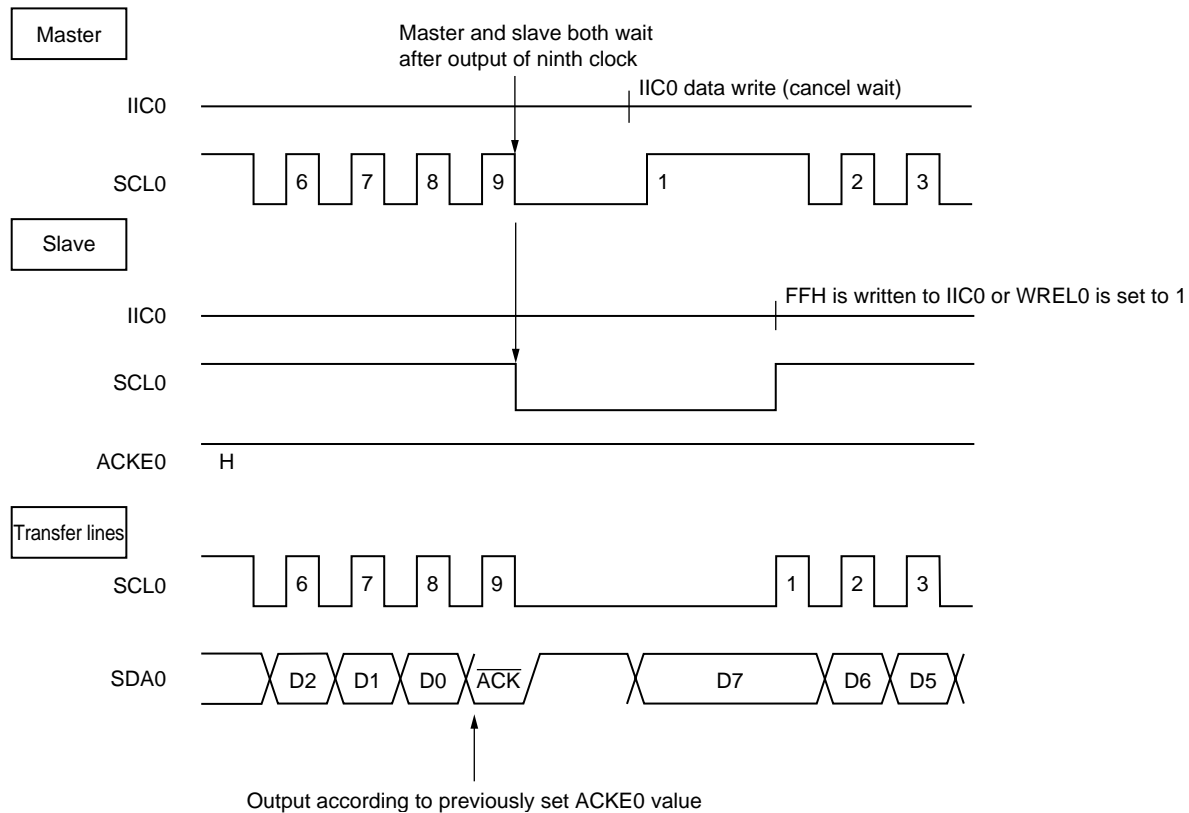

Remarks ACKE0 : Bit 2 of IIC control register (IICC0)

WREL0 : Bit 5 of IIC control register (IICC0)

A wait may be automatically generated depending on the setting for bit 3 (WTIM0) of the IIC control register 0 (IICC0).

Normally, when bit 5 (WREL0) of IICC0 is set to "1" or when FFH is written to the IIC shift register 0 (IIC0), the wait status is canceled and the transmitting side write data to IIC0 to cancel the wait status.

The master device can also cancel the wait status via either of the following methods.

- By setting bit 1 (STT0) of IICC0 to "1"
- By setting bit 0 (SPT0) of IICC0 to "1"


18.5.7 I²C interrupt requests (INTIIC0)

The INTIIC0 interrupt request timing and the IIC status register 0 (IICS0) settings corresponding to that timing are described below.

(1) Master device operation

(a) Start ~ Address ~ Data ~ Data ~ Stop (normal transmission/reception)


(i) When WTIM0 = 0



- ▲1 : IICS0 = 1000×110B
- ▲2 : IICS0 = 1000×000B
- ▲3 : IICS0 = 1000×000B (Sets WTIM0)
- ▲4 : IICS0 = 1000××00B (Sets SPT0)
- △5 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(ii) When WTIM0 = 1




- ▲1 : IICS0 = 1000×110B
- ▲2 : IICS0 = 1000×100B
- ▲3 : IICS0 = 1000××00B (Sets SPT0)
- △4 : IICS0 = 00000001B


Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(b) Start ~ Address ~ Data ~ Start ~ Address ~ Data ~ Stop (restart)

(i) When WTIM0 = 0

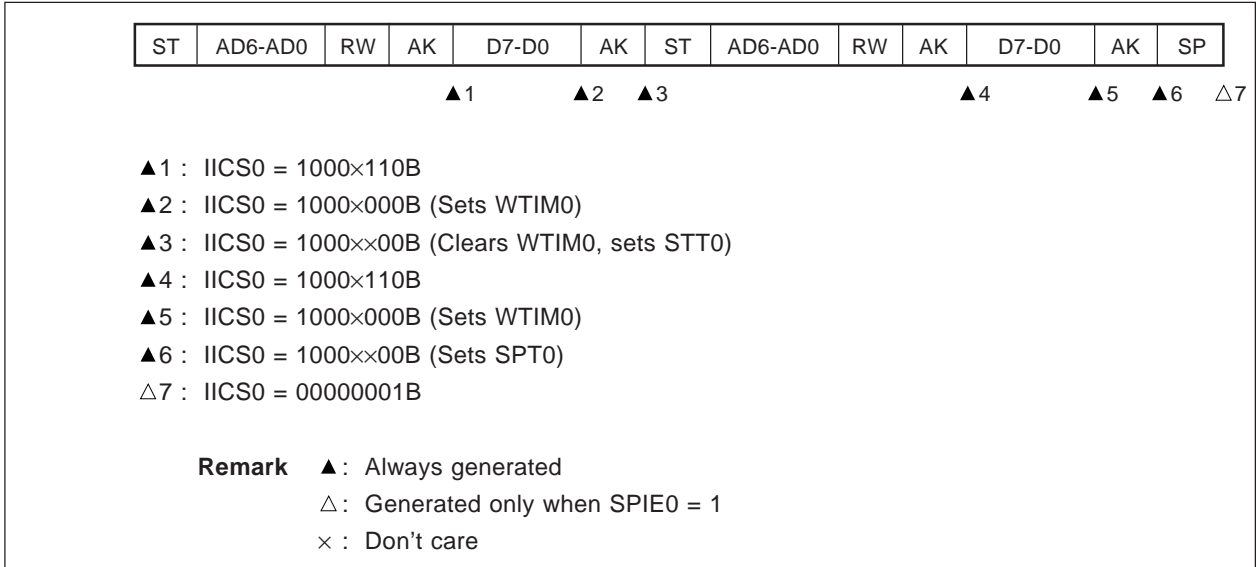


(ii) When WTIM0 = 1

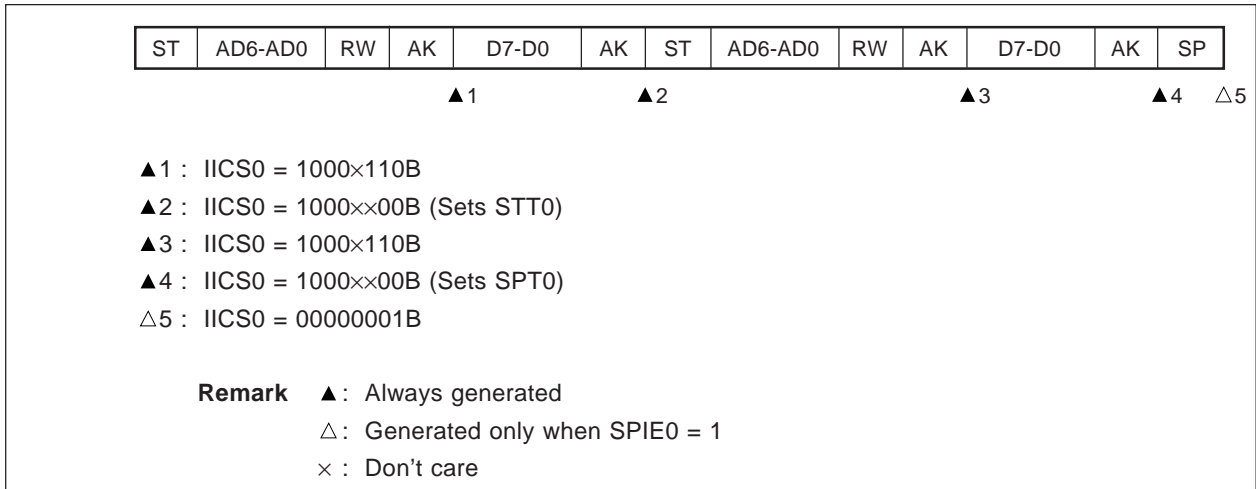

(c) Start ~ Code ~ Data ~ Data ~ Stop (extension code transmission)


(i) When WTIM0 = 0



- ▲1 : IICS0 = 1010×110B
- ▲2 : IICS0 = 1010×000B
- ▲3 : IICS0 = 1010×000B (Sets WTIM0)
- ▲4 : IICS0 = 1010××00B
- △5 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(ii) When WTIM0 = 1




- ▲1 : IICS0 = 1010×110B
- ▲2 : IICS0 = 1010×100B
- ▲3 : IICS0 = 1010××00B (Sets SPT0)
- △4 : IICS0 = 00001001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(2) Slave device operation (Slave address data reception time (matches with SVA0))

(a) Start ~ Address ~ Data ~ Data ~ Stop

(i) When WTIM0 = 0



▲1 : IICS0 = 0001×110B


▲2 : IICS0 = 0001×000B

▲3 : IICS0 = 0001×000B

△4 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(ii) When WTIM0 = 1



▲1 : IICS0 = 0001×110B

▲2 : IICS0 = 0001×100B


▲3 : IICS0 = 0001××00B

△4 : IICS0 = 00000001B


Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(b) Start ~ Address ~ Data ~ Start ~ Address ~ Data ~ Stop

(i) When $WTIM0 = 0$ (after restart, matches with SVA0)

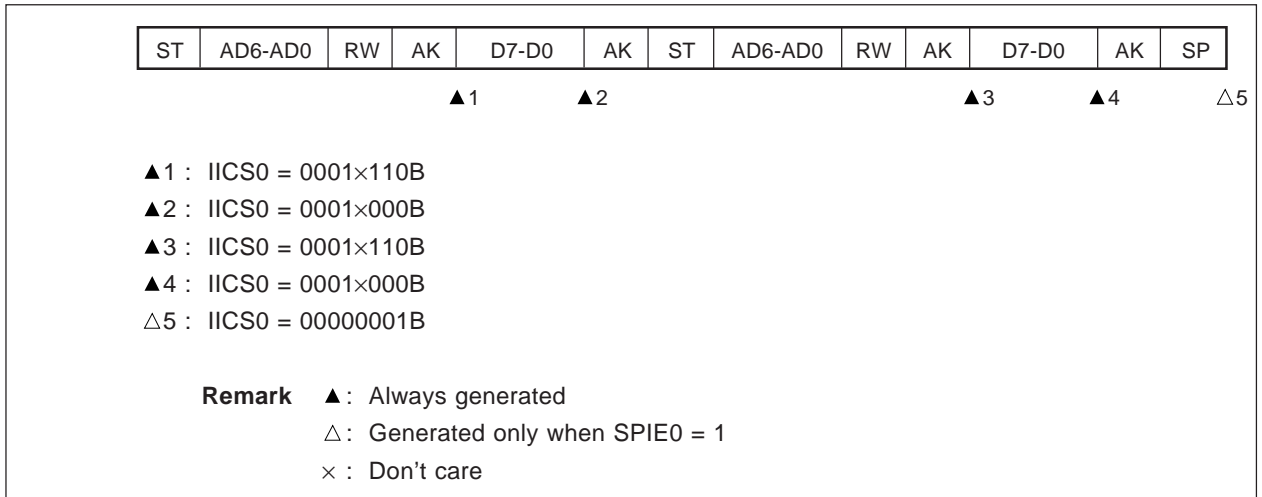


(ii) When $WTIM0 = 1$ (after restart, matches with SVA0)

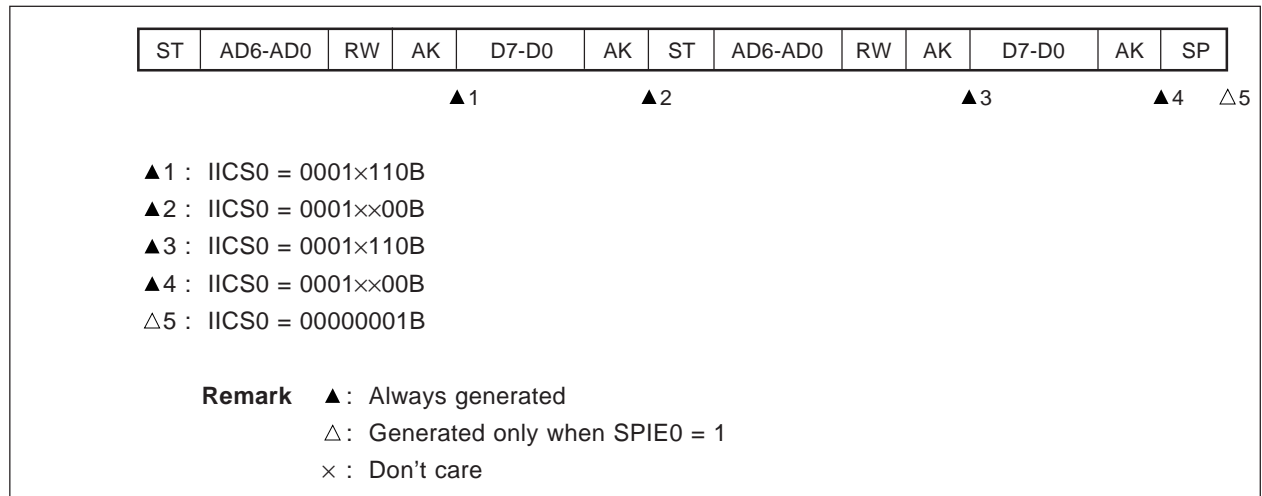


(c) Start ~ Address ~ Data ~ Start ~ Code ~ Data ~ Stop

(i) When WTIM0 = 0 (after restart, extension code reception)

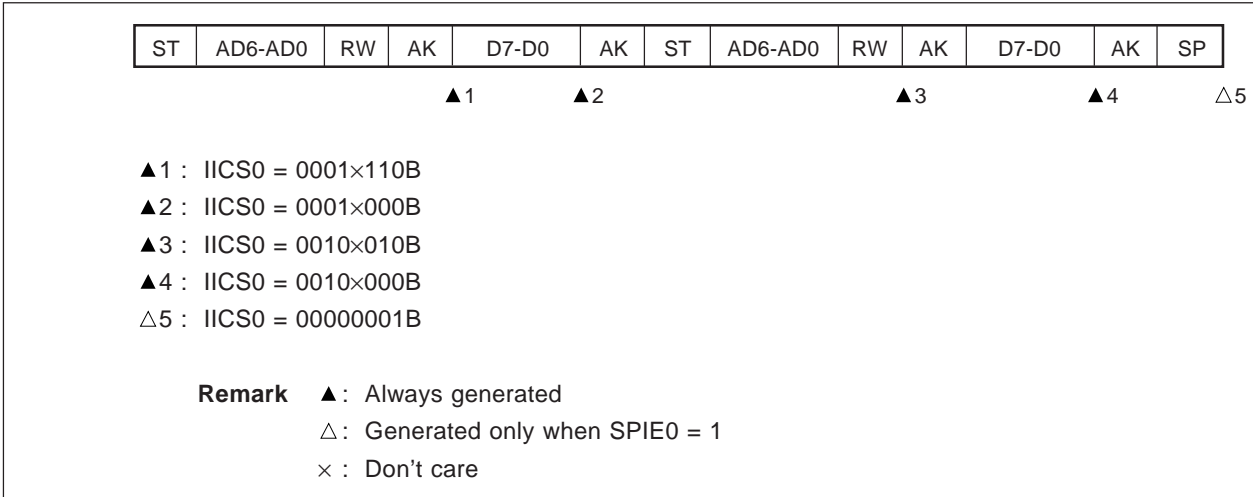


(ii) When WTIM0 = 1 (after restart, extension code reception)

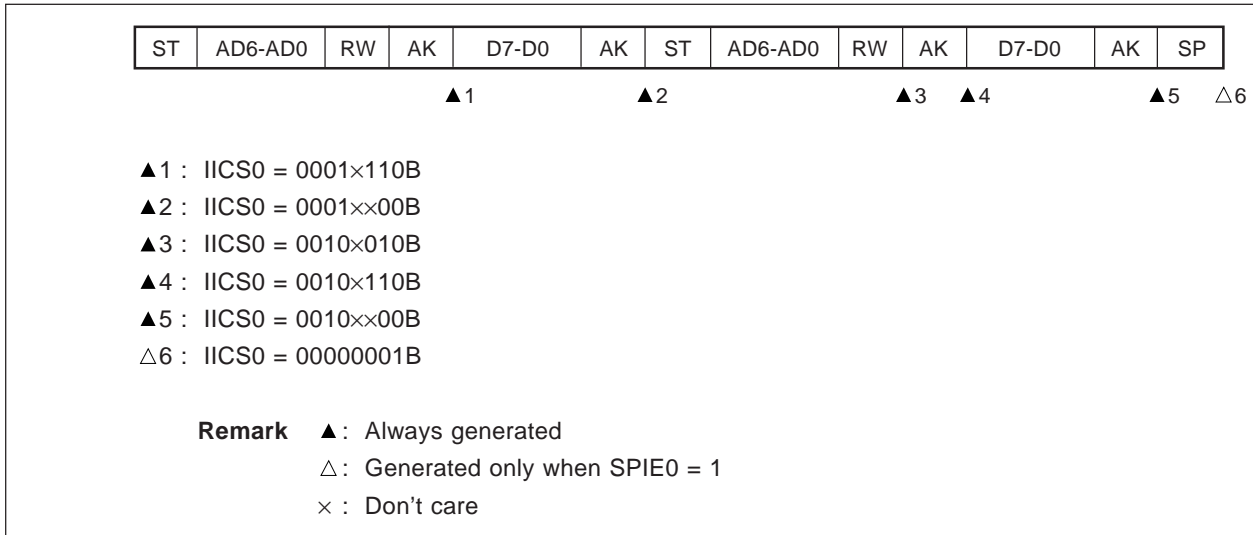


(d) Start ~ Address ~ Data ~ Start ~ Address ~ Data ~ Stop

(i) When WTIM0 = 0 (after restart, does not match with address (= not extension code))

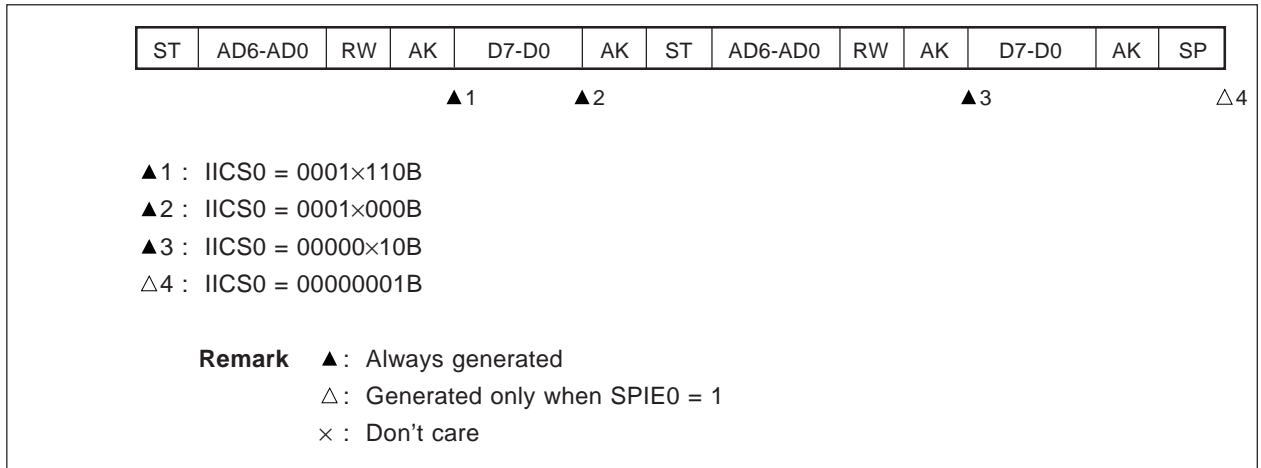


(ii) When WTIM0 = 1 (after restart, does not match with address (= not extension code))

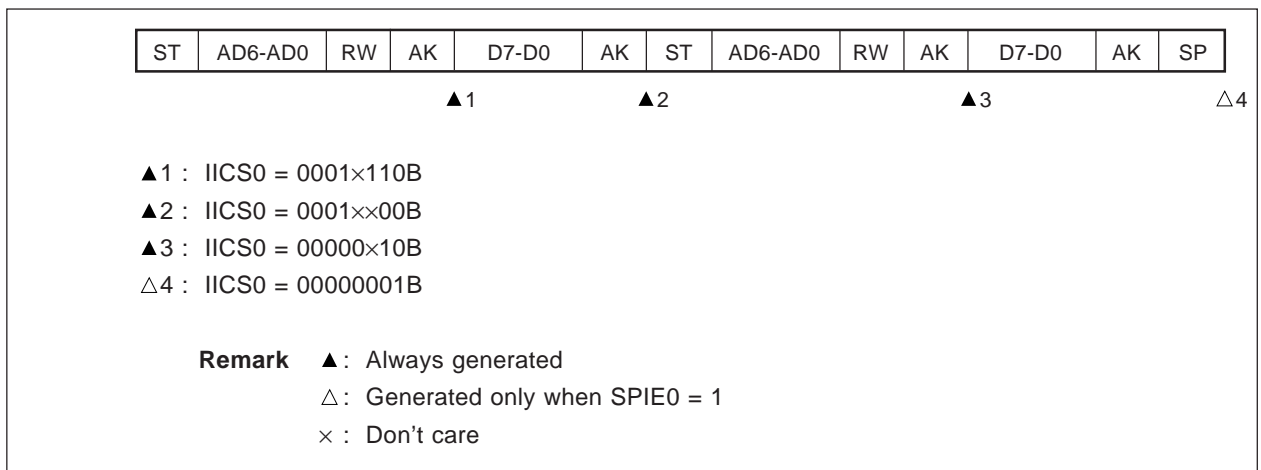

(3) Slave device operation (when receiving extension code)

(a) Start ~ Code ~ Data ~ Data ~ Stop

(i) When WTIM0 = 0



▲1 : IICS0 = 0010×010B


▲2 : IICS0 = 0010×000B

▲3 : IICS0 = 0010×000B

△4 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(ii) When WTIM0 = 1



▲1 : IICS0 = 0010×010B

▲2 : IICS0 = 0010×110B

▲3 : IICS0 = 0010×100B


▲4 : IICS0 = 0010××00B

△5 : IICS0 = 00000001B


Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(b) Start ~ Code ~ Data ~ Start ~ Address ~ Data ~ Stop

(i) When WTIM0 = 0 (after restart, matches with SVA0n)

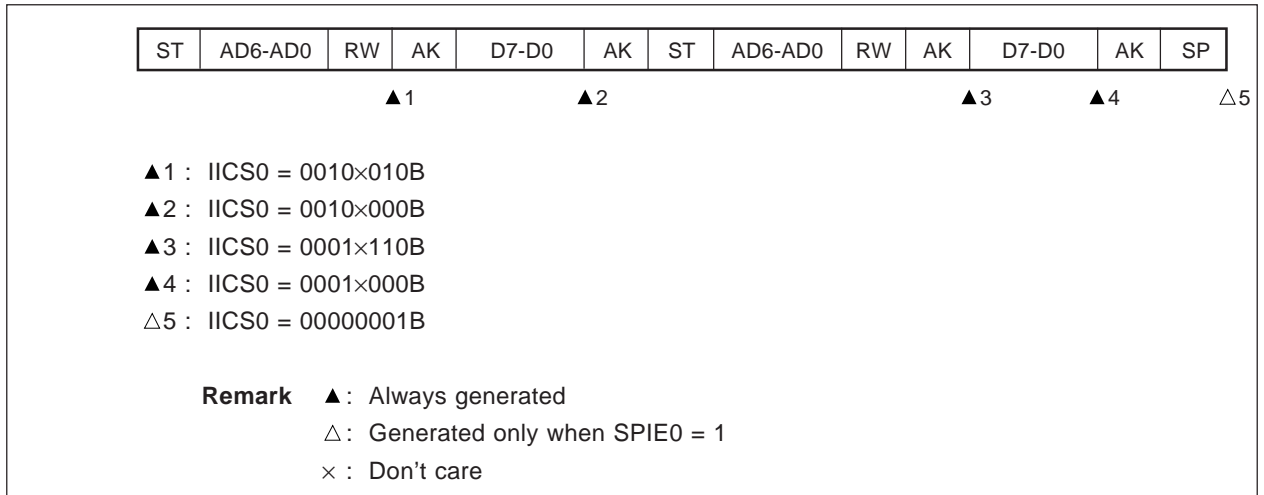


(ii) When WTIM0 = 1 (after restart, matches with SVA0)

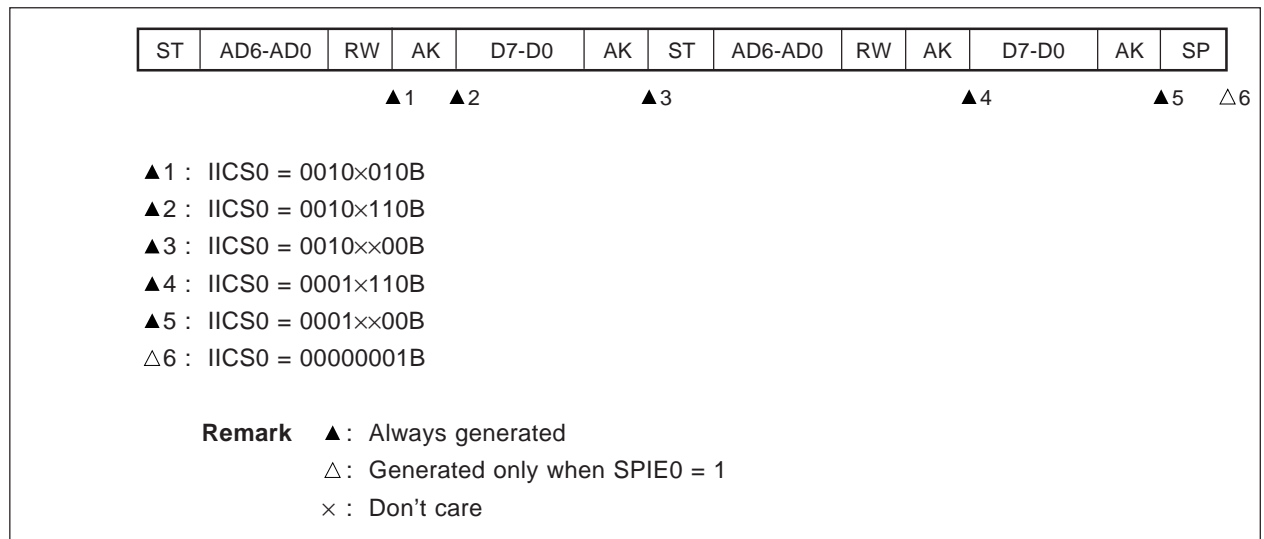


(c) Start ~ Code ~ Data ~ Start ~ Code ~ Data ~ Stop

(i) When WTIM0 = 0 (after restart, extension code reception)

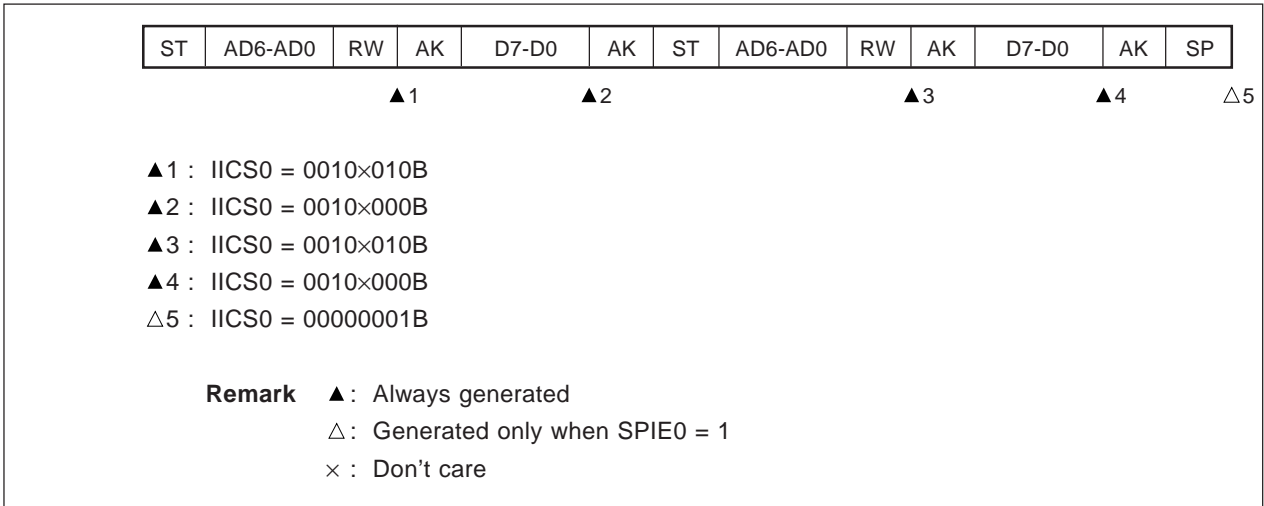


(ii) When WTIM0 = 1 (after restart, extension code reception)

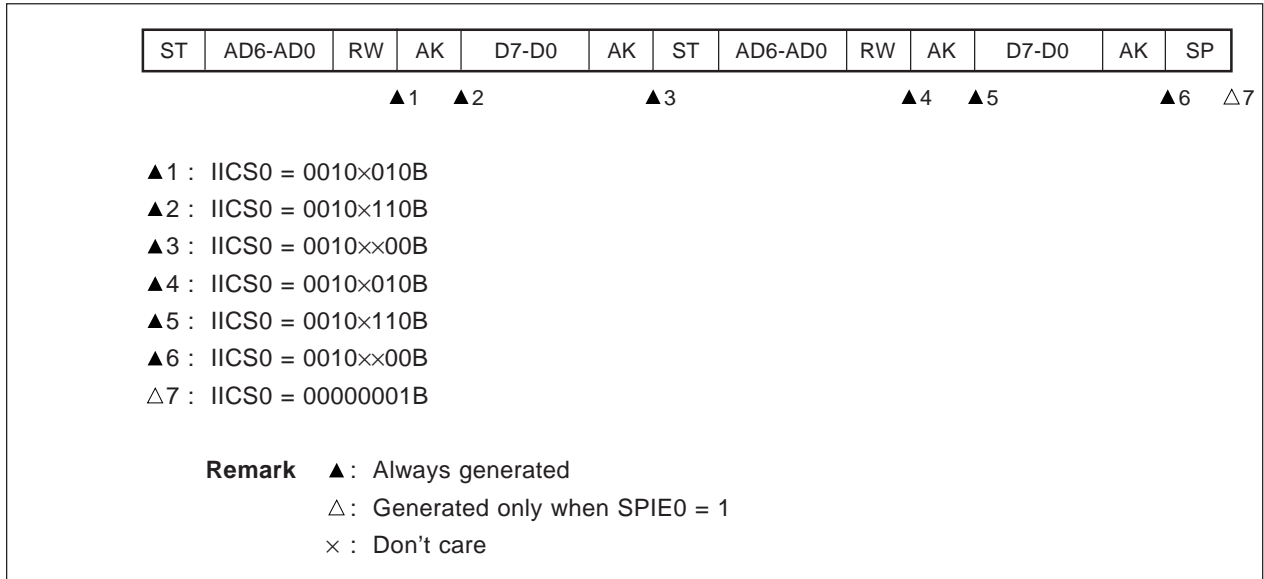


(d) Start ~ Code ~ Data ~ Start ~ Address ~ Data ~ Stop

(i) When WTIM0 = 0 (after restart, does not match with address (= not extension code))

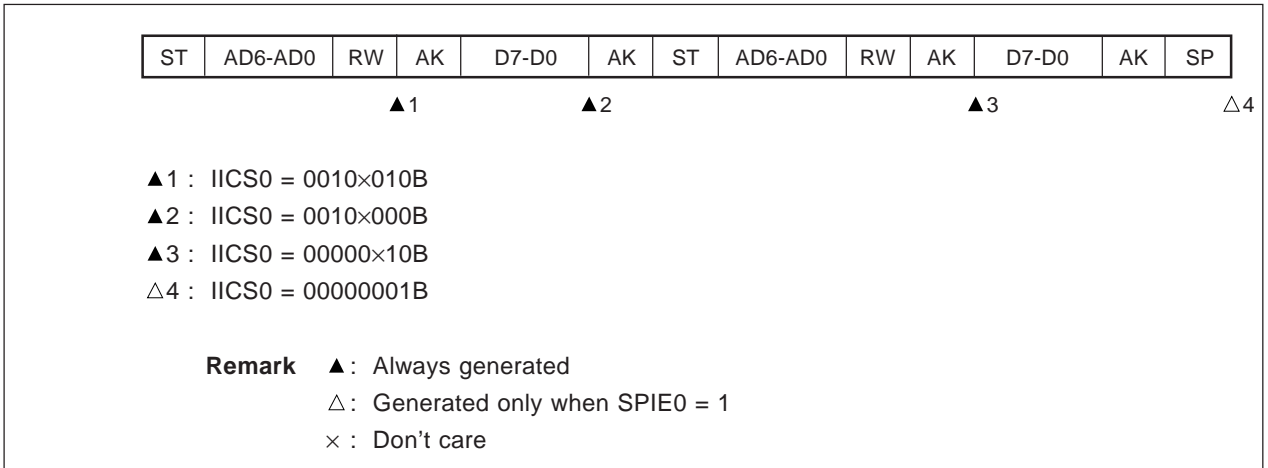


(ii) When WTIM0 = 1 (after restart, does not match with address (= not extension code))

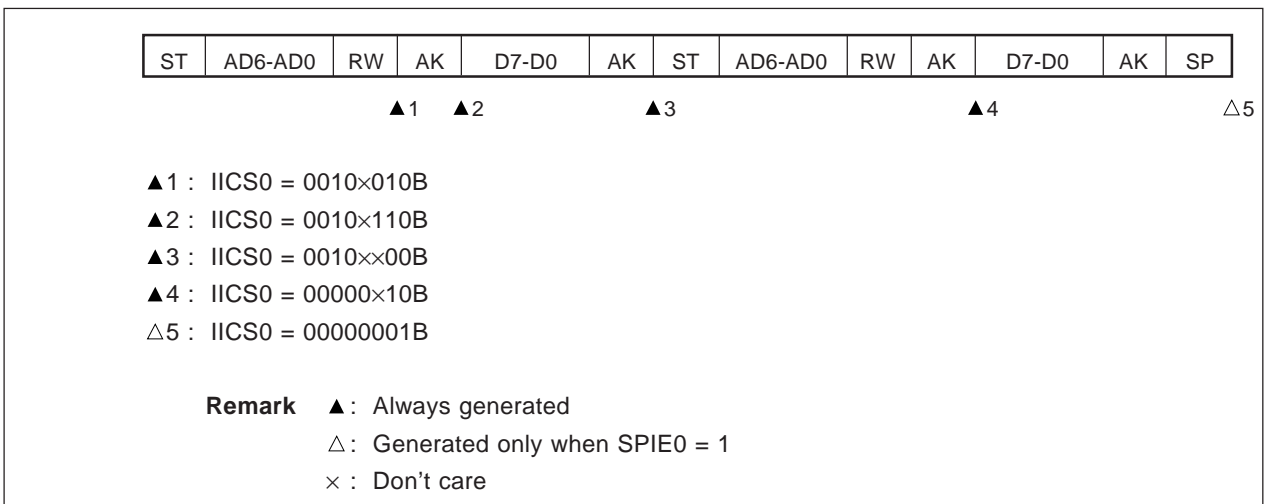

(4) Operation without communication


(a) Start ~ Code ~ Data ~ Data ~ Stop

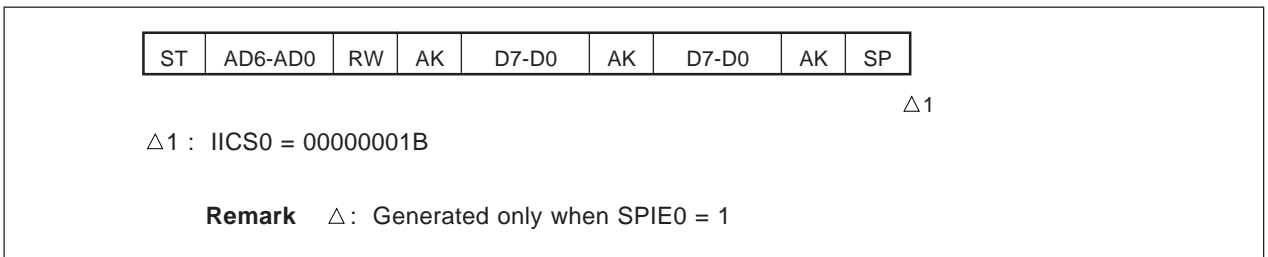

(5) Arbitration loss operation (operation as slave after arbitration loss)

(a) When arbitration loss occurs during transmission of slave address data

(i) When WTIM0 = 0



▲1 : IICS0 = 0101×110B (**Example** When ALD0 is read during interrupt servicing)


▲2 : IICS0 = 0001×000B

▲3 : IICS0 = 0001×000B

△4 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(ii) When WTIM0 = 1



▲1 : IICS0 = 0101×110B (**Example** When ALD0 is read during interrupt servicing)

▲2 : IICS0 = 0001×100B


▲3 : IICS0 = 0001××00B

△4 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(b) When arbitration loss occurs during transmission of extension code


(i) When WTIM0 = 0



- ▲1 : IICS0 = 0110×010B (**Example** When ALD0 is read during interrupt servicing)
- ▲2 : IICS0 = 0010×000B
- ▲3 : IICS0 = 0010×000B
- △4 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(ii) When WTIM0 = 1




- ▲1 : IICS0 = 0110×010B (**Example** When ALD0 is read during interrupt servicing)
- ▲2 : IICS0 = 0010×110B
- ▲3 : IICS0 = 0010×100B
- ▲4 : IICS0 = 0010××00B
- △5 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(6) Operation when arbitration loss occurs (no communication after arbitration loss)


(a) When arbitration loss occurs during transmission of slave address data (when WTIM0 = 1)



▲1 : IICS0 = 01000110B (**Example** When ALD0 is read during interrupt servicing)
 △2 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1

(b) When arbitration loss occurs during transmission of extension data




▲1 : IICS0 = 0110×010B (**Example** When ALD0 is read during interrupt servicing)
 LRELO is set to "1" by software
 △2 : IICS0 = 00000001B


Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care

(c) When arbitration loss occurs during transmission of data

(i) When WTIM0 = 0

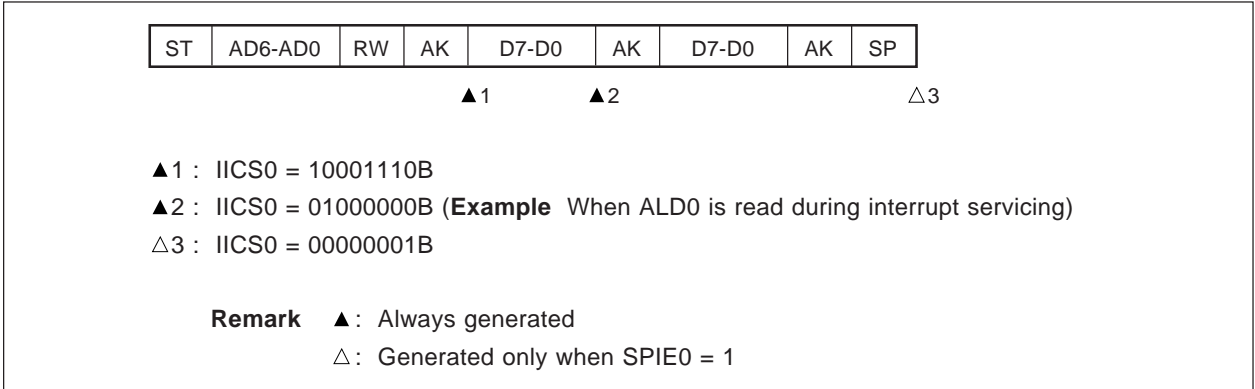


(ii) When WTIM0 = 1

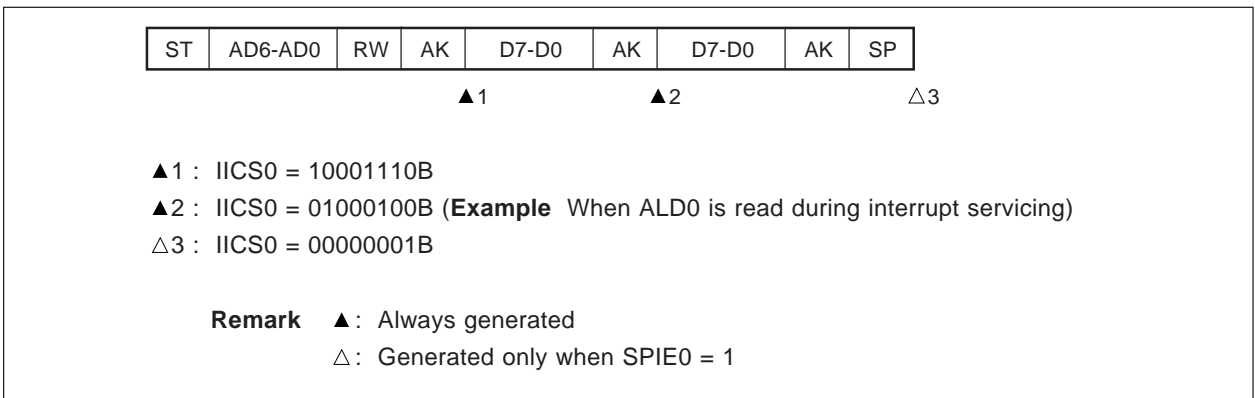

(d) When loss occurs due to restart condition during data transfer

(i) Not extension code (Example: unmatched with SVA0, WTIM0 = 1)




▲1 : IICS0 = 1000×110B

▲2 : IICS0 = 01000110B (Example When ALD0 is read during interrupt servicing)

△3 : IICS0 = 00000001B

Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care
 n = 6 - 0

(ii) Extension code



▲1 : IICS0 = 1000×110B


▲2 : IICS0 = 0110×010B (Example When ALD0 is read during interrupt servicing)

Sets LREL0 = 1 by software

△3 : IICS0 = 00000001B


Remark ▲ : Always generated
 △ : Generated only when SPIE0 = 1
 × : Don't care
 n = 6 - 0

(e) When loss occurs due to stop condition during data transfer

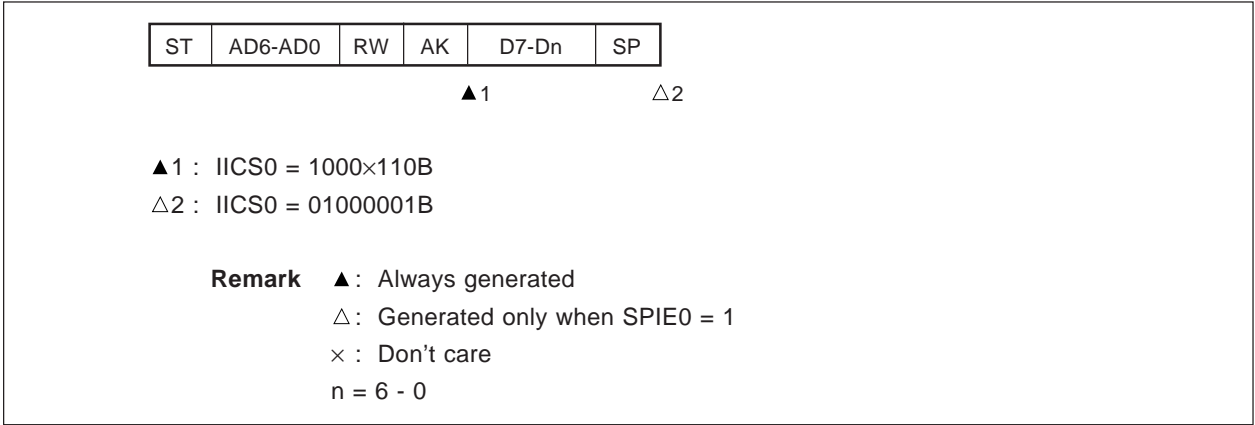


(f) When arbitration loss occurs due to low-level data when attempting to generate a restart condition

(i) When WTIM0 = 0

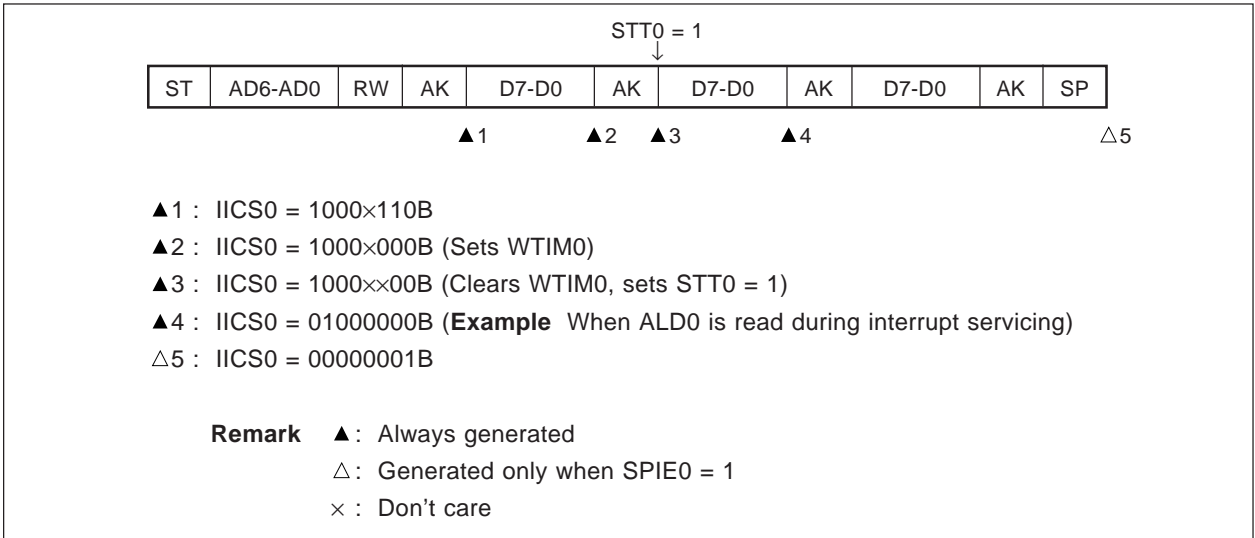


(ii) When WTIM0 = 1

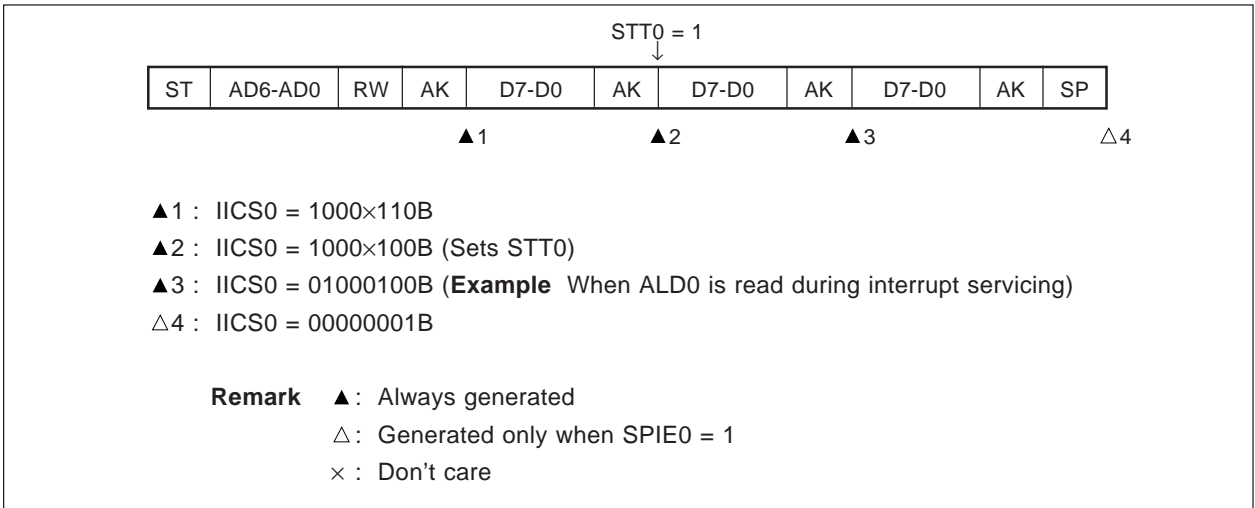

(g) When arbitration loss occurs due to a stop condition when attempting to generate a restart condition


(i) When $WTIM0 = 0$

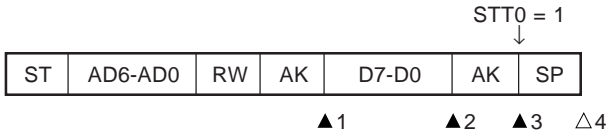

- ▲1 : IICS0 = 1000×110B
- ▲2 : IICS0 = 1000×000B (Sets $WTIM0$)
- ▲3 : IICS0 = 1000××00B (Sets $STT0$)
- Δ4 : IICS0 = 01000001B

Remark ▲ : Always generated
 Δ : Generated only when $SPIE0 = 1$
 × : Don't care

(ii) When $WTIM0 = 1$

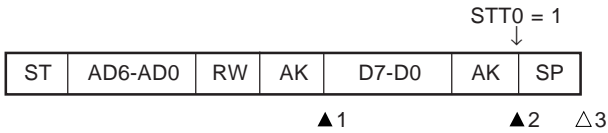


- ▲1 : IICS0 = 1000×110B
- ▲2 : IICS0 = 1000××00B (Sets $STT0$)
- Δ3 : IICS0 = 01000001B


Remark ▲ : Always generated
 Δ : Generated only when $SPIE0 = 1$
 × : Don't care

(h) When arbitration loss occurs due to low-level data when attempting to generate a stop condition

(i) When $WTIM0 = 0$

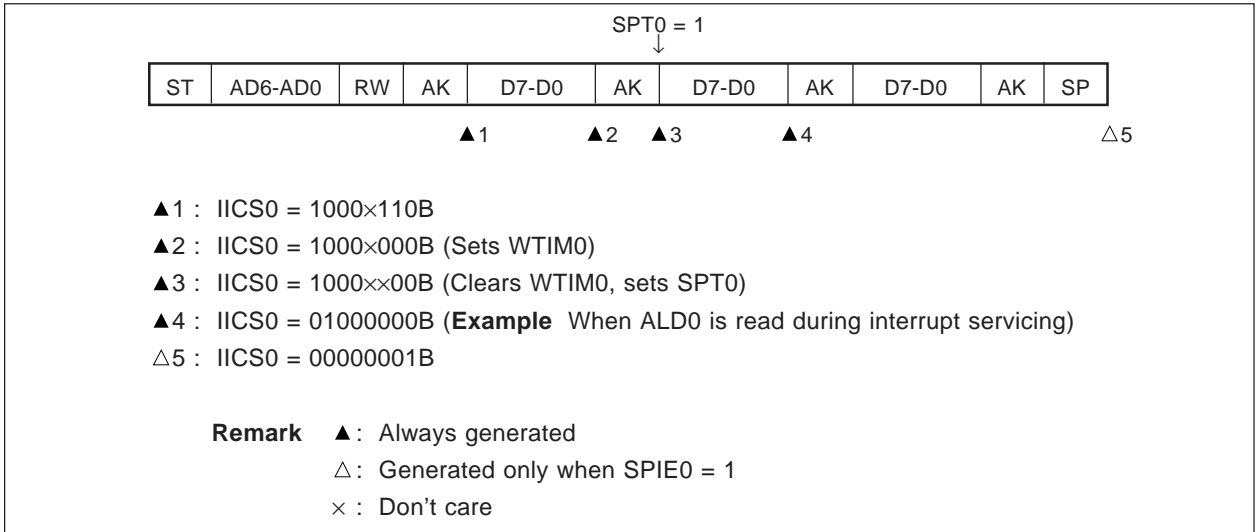

(ii) When $WTIM0 = 1$

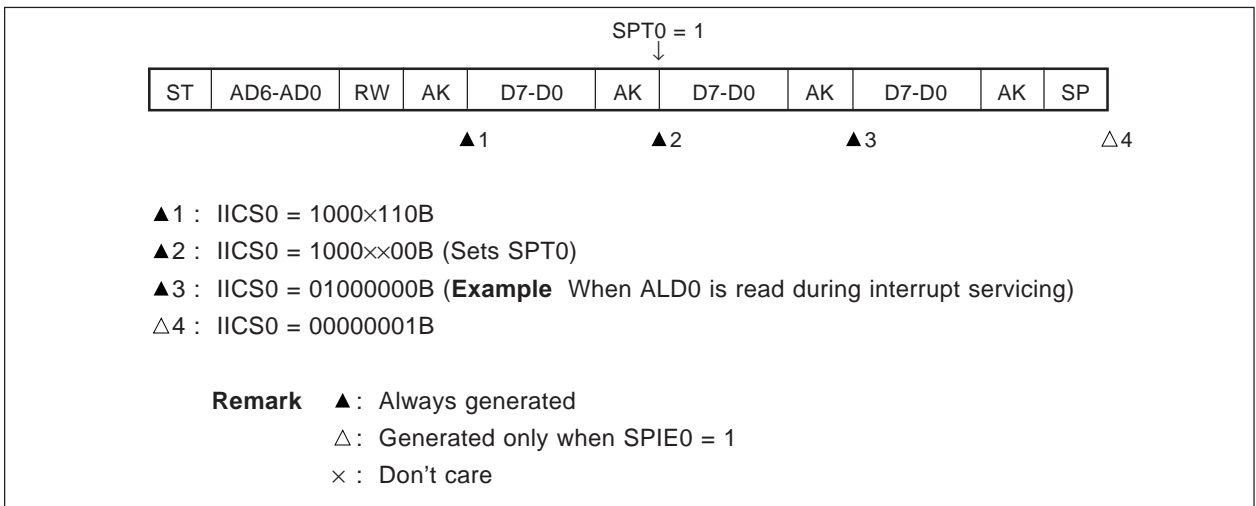

18.5.8 Interrupt request (INTIIC0) generation timing and wait control

The setting of bit 3 (WTIM0) in the IIC control register 0 (IICC0) determines the timing by which INTIIC0 is generated and the corresponding wait control, as shown in Table 18-2.

Table 18-2. INTIIC0 Timing and Wait Control

WTIM	During Slave Device Operation			During Master Device Operation		
	Address	Data reception	Data transmission	Address	Data reception	Data transmission
0	9 Notes 1, 2	8 Note 2	8 Note 2	9	8	8
1	9 Notes 1, 2	9 Note 2	9 Note 2	9	9	9

- Notes**
1. The slave device's INTIIC0 signal and wait period occurs at the falling edge of the ninth clock only when there is a match with the address set to the slave address register 0 (SVA0).
At this point, \overline{ACK} is output regardless of the value set to IICC0's bit 2 (ACKE0). For a slave device that has received an extension code, INTIIC0 occurs at the falling edge of the eighth clock.
 2. If the received address does not match the contents of the slave address register 0 (SVA0), neither INTIIC0 nor a wait occurs.

Remark The numbers in the table indicate the number of the serial clock's clock signals. Interrupt requests and wait control are both synchronized with the falling edge of these clock signals.

(1) During address transmission/reception

- Slave device operation : Interrupt and wait timing are determined regardless of the WTIM0 bit.
- Master device operation: Interrupt and wait timing occur at the falling edge of the ninth clock regardless of the WTIM0 bit.

(2) During data reception

- Master/slave device operation: Interrupt and wait timing are determined according to the WTIM0 bit.

(3) During data transmission

- Master/slave device operation: Interrupt and wait timing are determined according to the WTIM0 bit.

(4) Wait cancellation method

The four wait cancellation methods are as follows.

- By setting bit 5 (WREL0) of IIC control register 0 (IICC0) to "1"
- By writing to the IIC shift register 0 (IIC0)
- By setting a start condition (setting bit 1 (STT0) of IICC0 to "1")
- By setting a stop condition (setting IICC0's bit 0 (SPT0) to "1")

When 8-clock wait has been selected (WTIM0 = 0), the output level of \overline{ACK} must be determined prior to wait cancellation.

(5) Stop condition detection

INTIIC0 is generated when a stop condition is detected.

18.5.9 Address match detection method

When in I²C bus mode, the master device can select a particular slave device by transmitting the corresponding slave address.

Address match can be detected automatically by hardware. An interrupt frequency (INTIIC0) occurs when a local address has been set to the slave address register 0 (SVA0) and when the address set to SVA0 matches the slave address sent by the master device, or when an extension code has been received.

18.5.10 Error detection

During I²C bus mode, the status of the serial data bus (SDA0) during data transmission is captured by the IIC shift register 0 (IIC0) of the transmitting device, so the IIC0 data prior to transmission can be compared with the transmitted IIC0 data to enable detection of transmission errors. A transmission error is judged as having occurred when the compared data values do not match.

18.5.11 Extension code

- (1) When the high-order 4 bits of the receive address are either "0000" or "1111", the extension code flag (EXC0) is set for extension code reception and an interrupt request (INTIIC0) is issued at the falling edge of the eighth clock. The local address stored in the slave address register 0 (SVA0) is not affected.
- (2) If "111110xx" is set to SVA0 by a 10-bit address transfer and "111110xx" is transferred from the master device, the results are as follows. Note that INTIIC0 occurs at the falling edge of the eighth clock.
 - High-order four bits of data match: EXC0 = 1 **Note**
 - Seven bits of data match: COI0 = 1 **Note**

Note EXC0 : Bit 5 of IIC status register 0 (IICS0)
 COI0 : Bit 4 of IIC status register 0 (IICS0)

- (3) Since the processing after the interrupt request occurs differs according to the data that follows the extension code, such processing is performed by software.
 For example, after the extension code is received, if you do not wish to operate the target device as a slave device, you can set bit 6 (LREL0) of the IIC control register 0 (IICC0) to "1" to set the standby mode for the next communication operation.

Table 18-3. Extension Code Bit Definitions

Slave Address	R/W Bit	Description
0000 000	0	General call address
0000 000	1	Start byte
0000 001	×	CBUS address
0000 010	×	Address that is reserved for different bus format
1111 0xx	×	10-bit slave address specification

18.5.12 Arbitration

When several master devices simultaneously output a start condition (when STT0 is set to 1 before STD0 is set to 1^{Note}), communication among the master devices is performed as the number of clocks are adjusted until the data differs. This kind of operation is called arbitration.

When one of the master devices loTMΩs in arbitration, an arbitration loss flag (ALD0) in the IIC status register 0 (IICS0) is set via the timing by which the arbitration loss occurred, and the SCL0 and SDA0 lines are both set for high impedance, which releases the bus.

The arbitration loss is detected based on the timing of the next interrupt request (the eighth or ninth clock, when a stop condition is detected, etc.) and the ALD0 = 1 setting that has been made by software.

For details of interrupt request timing, see **18.5.7 I²C interrupt requests (INTIIC0)**.

Note STD0 : Bit 1 of IIC status register 0 (IICS0)

STT0 : Bit 1 of IIC control register 0 (IICC0)

Figure 18-14. Arbitration Timing Example

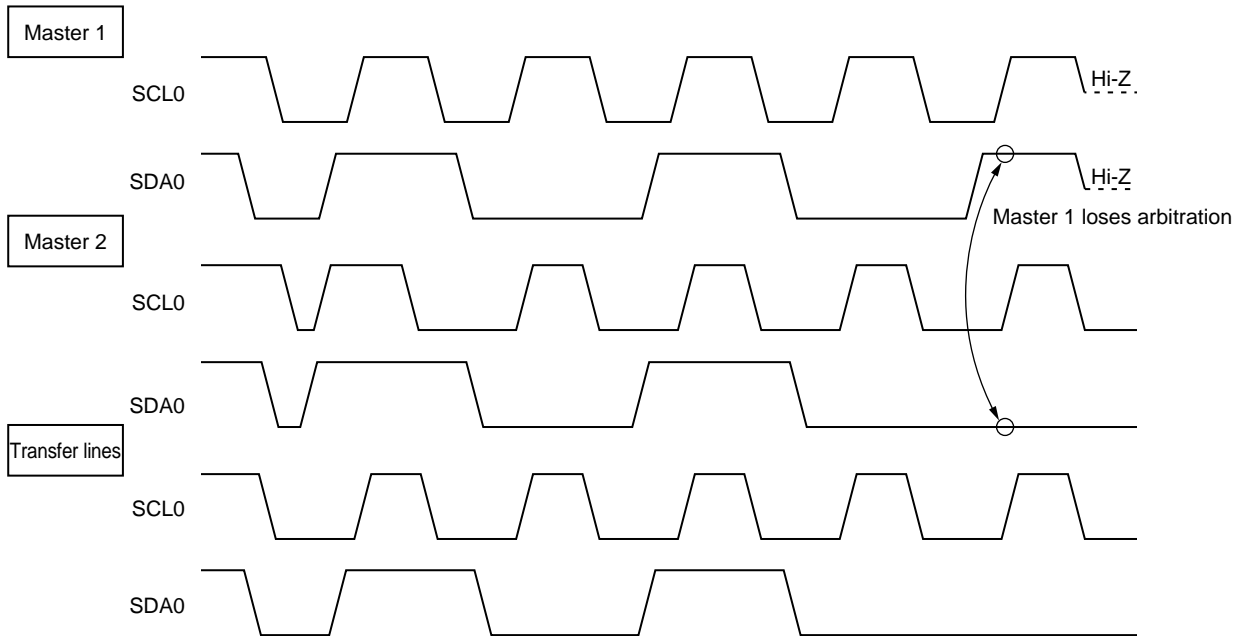


Table 18-4. Status during Arbitration and Interrupt Request Generation Timing

Status during Arbitration	Interrupt Request Generation Timing
During address transmission	At falling edge of eighth or ninth clock following byte transfer Note 1
Read/write data after address transmission	
During extension code transmission	
Read/write data after extension code transmission	
During data transmission	
During $\overline{\text{ACK}}$ signal transfer period after data transmission	
When restart condition is detected during data transfer	
When stop condition is detected during data transfer	When stop condition is output (when SPIE0 = 1) Note 2
When data is at low level while attempting to output a restart condition	At falling edge of eighth or ninth clock following byte transfer Note 1
When stop condition is detected while attempting to output a restart condition	When stop condition is output (when SPIE0 = 1) Note 2
When data is at low level while attempting to output a stop condition	At falling edge of eighth or ninth clock following byte transfer Note 1
When SCL0 is at low level while attempting to output a restart condition	

- Notes**
1. When WTIM0 (bit 3 of the IIC control register 0 (IICC0)) = 1, an interrupt request occurs at the falling edge of the ninth clock. When WTIM0 = 0 and the extension code's slave address is received, an interrupt request occurs at the falling edge of the eighth clock.
 2. When there is a chance that arbitration will occur, set SPIE0 = 1 for master device operation.

Remark SPIE0 : Bit 5 of the IIC control register 0 (IICC0)

18.5.13 Wake up function

The I²C bus slave function is a function that generates an interrupt request (INTIIC0) when a local address and extension code have been received.

This function makes processing more efficient by preventing unnecessary interrupt requests from occurring when addresses do not match.

When a start condition is detected, wake-up standby mode is set. This wake-up standby mode is in effect while addresses are transmitted due to the possibility that an arbitration loss may change the master device (which has output a start condition) to a slave device.

However, when a stop condition is detected, bit 5 (SPIE0) of the IIC control register 0 (IICC0) is set regardless of the wake up function, and this determines whether interrupt requests are enabled or prohibited.

18.5.14 Communication reservation

To start master device communications when not currently using a bus, a communication reservation can be made to enable transmission of a start condition when the bus is released. There are two modes under which the bus is not used.

- When arbitration results in neither master nor slave operation
- When an extension code is received and slave operation is disabled ($\overline{\text{ACK}}$ is not returned and the bus was released when bit 6 (LRELO) of the IIC control register 0 (IICC0) was set to "1").

If bit 1 (STT0) of IICC0 is set while the bus is not used (after a stop condition is detected), a start condition is automatically generated and wait status is set.

When the bus release is detected (when a stop condition is detected), writing to the IIC shift register 0 (IIC0) causes the master's address transfer to start. At this point, IICC0's bit 4 (SPIE0) should be set.

When STT0 has been set, the operation mode (as start condition or as communication reservation) is determined according to the bus status.

- If the bus has been released a start condition is generated
- If the bus has not been released (standby mode) communication reservation

Check whether the communication reservation operates or not with MST0 (bit 7 of the IIC status register 0 (IICS0)) after SST0 is set and a wait time elapses.


Wait periods, which should be set via software, are listed in Table 18-5. These wait periods can be set via the settings for bits 3 and 0 (SMC0 and CL00) in the IIC transfer clock select register 0 (IICCL0).

Table 18-5. Wait Periods

SMC0	CL00	Wait Period
0	0	26 clocks
0	1	46 clocks
1	0	16 clocks
1	1	

Figure 18-5 shows communication reservation timing.

Figure 18-15. Communication Reservation Timing

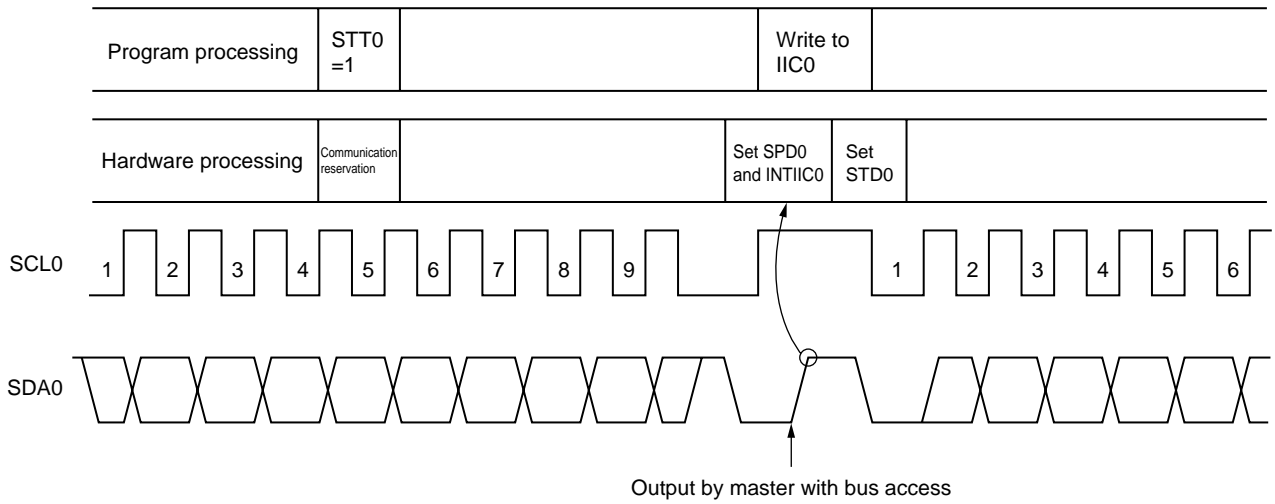

Remark IIC0 : IIC shift register 0
 STT0 : Bit 1 of IIC control register 0 (IICC0)
 STD0 : Bit 1 of IIC status register 0 (IICS0)
 SPD0 : Bit 0 of IIC status register 0 (IICS0)

Communication reservations are accepted via the following timing. After bit 1 (STD0) of the IIC status register 0 (IICS0) is set to "1", a communication reservation can be made by setting bit 1 (STT0) of the IIC control register 0 (IICC0) to "1" before a stop condition is detected.

Figure 18-16. Timing for Accepting Communication Reservations


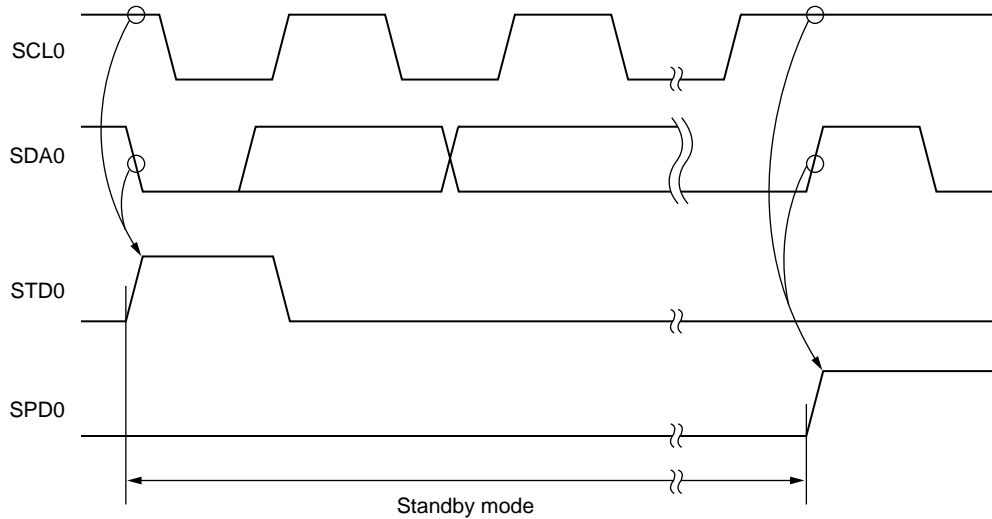


Figure 18-17 shows the communication reservation protocol.

Figure 18-17. Communication Reservation Protocol

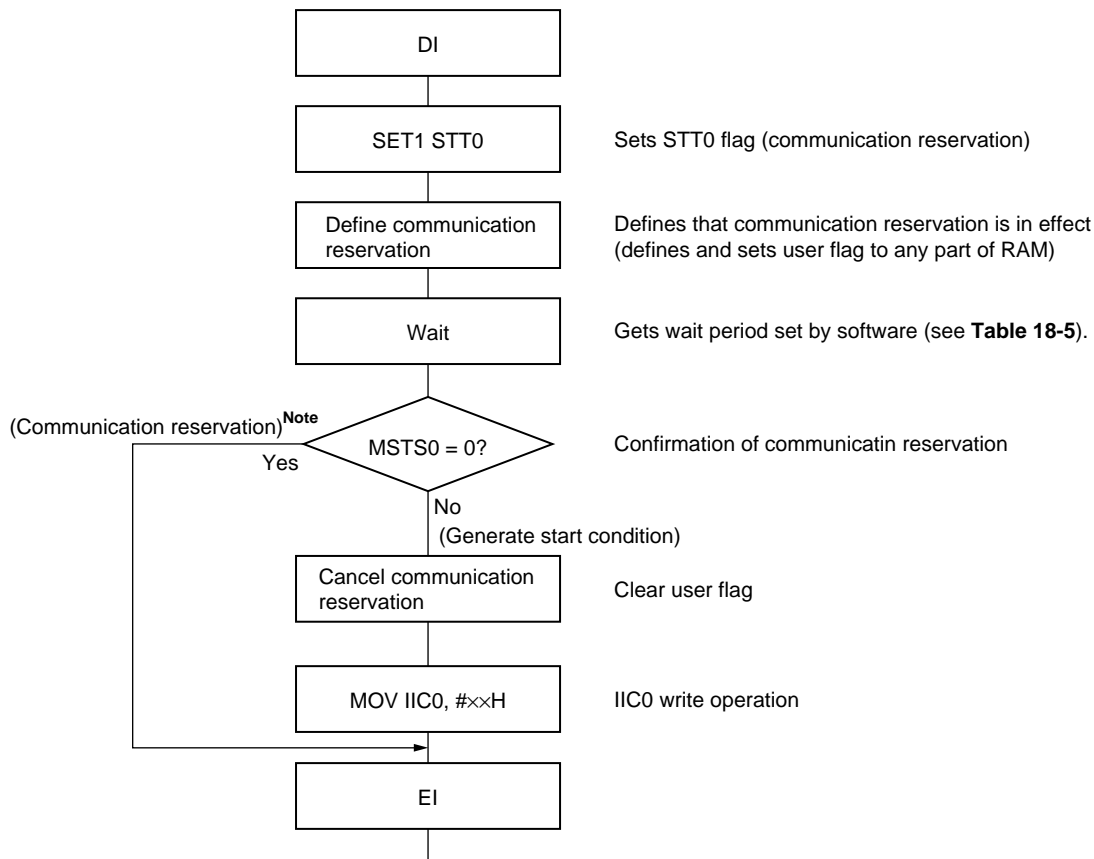

Note The communication reservation operation executes a write to the IIC shift register 0 (IIC0) when a stop condition interrupt request occurs.

Remark STT0 : Bit 1 of IIC control register 0 (IICC0)
 MSTS0 : Bit 7 of IIC status register 0 (IICS0)
 IIC0 : IIC shift register 0

18.5.15 Other cautions

After a reset, when changing from a mode in which no stop condition has been detected (the bus has not been released) to a master device communication mode, first generate a stop condition to release the bus, then perform master device communication.

When using multiple masters, it is not possible to perform master device communication when the bus has not been released (when a stop condition has not been detected).

Use the following sequence for generating a stop condition.


- (a) Set IIC transfer clock select register 0 (IICCL0).
- (b) Set bit 7 (IICE0) of the IIC control register 0 (IICC0).
- (c) Set bit 0 (SPT0) of IICC0.

18.5.16 Communication operations

(1) Master operations

The following is a flow chart of the master operations.


Figure 18-18. Master Operation Flow Chart

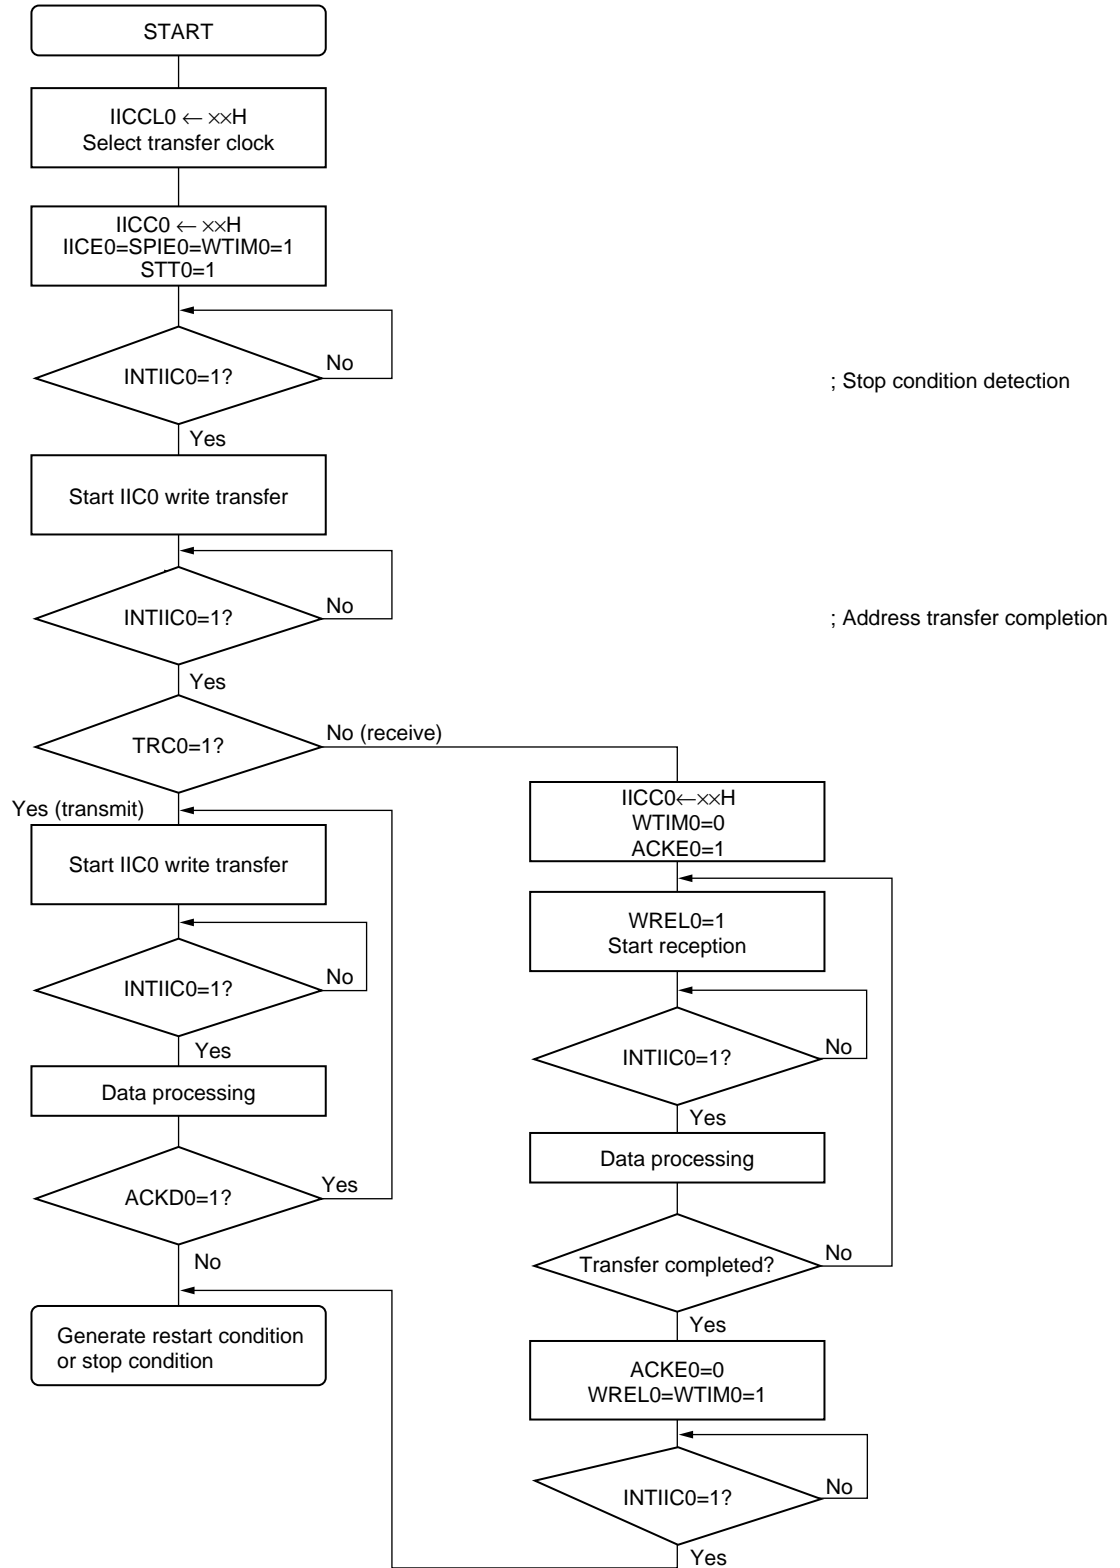

(2) Slave operation

An example of slave operation is shown below.

Figure 18-19. Slave Operation Flow Chart

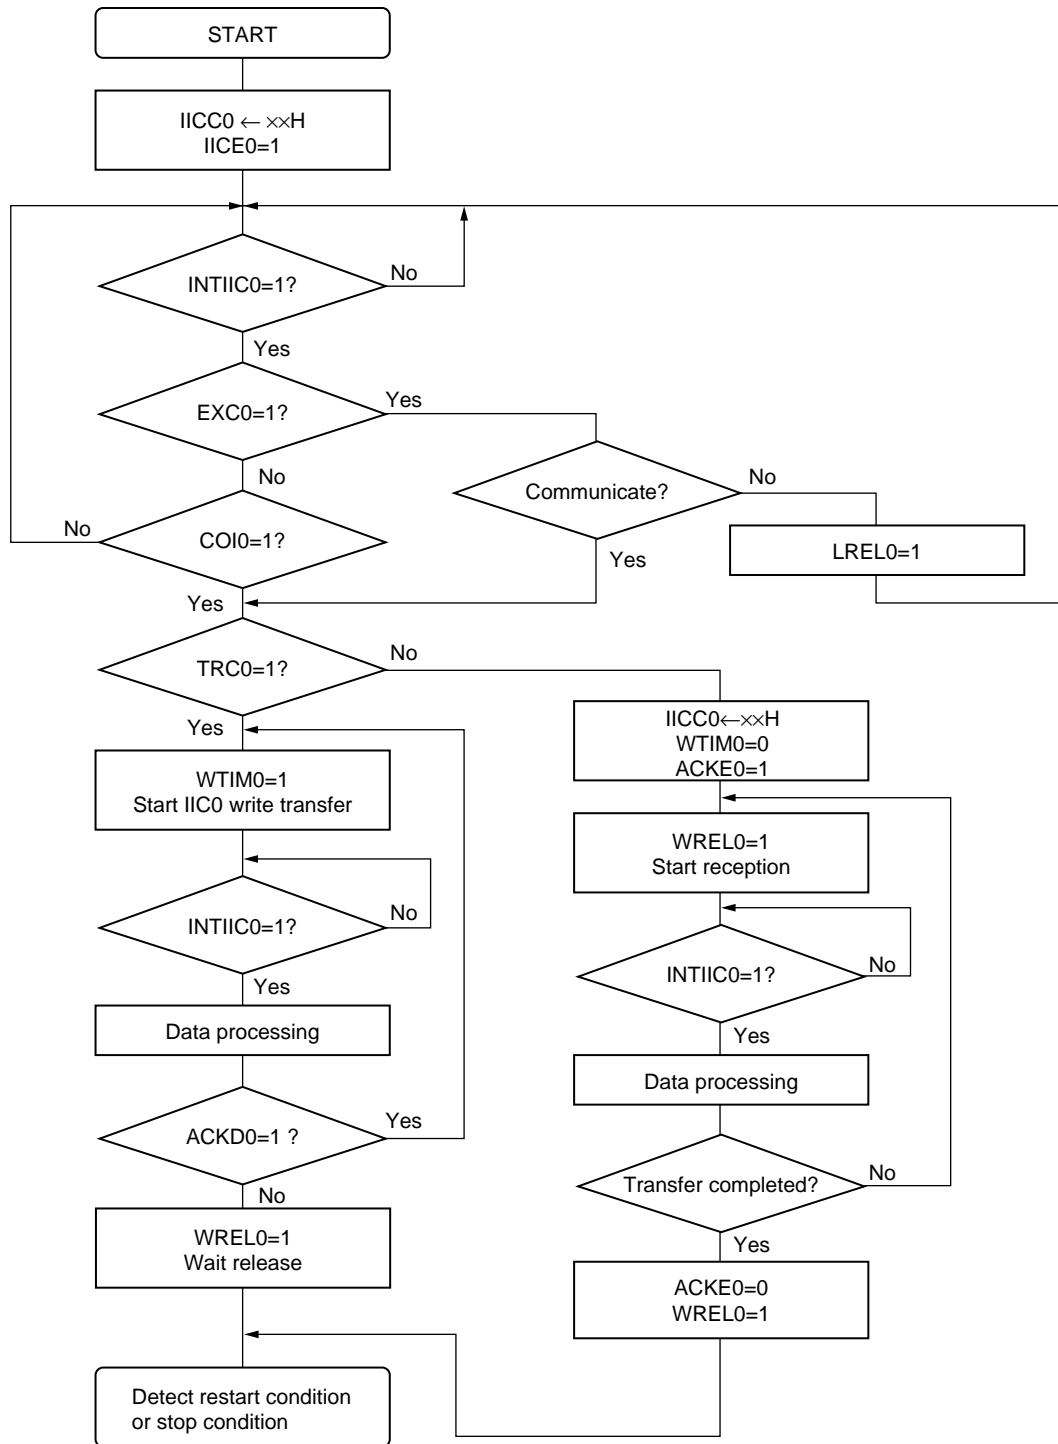

18.6 Timing Charts

When using the I²C bus mode, the master device outputs an address via the serial bus to select one of several slave devices as its communication partner.

After outputting the slave address, the master device transmits the TRC0 bit (bit 3 of the IIC status register 0 (IICS0)) that specifies the data transfer direction and then starts serial communication with the slave device.


Figures 18-20 and 18-21 show timing charts of the data communication.

The IIC shift register 0 (IIC0)'s shift operation is synchronized with the falling edge of the serial clock (SCL0). The transmit data is transferred to the SO0 latch and is output (MSB first) via the SDA0 pin.

Data input via the SDA0 pin is captured into IIC0 at the rising edge of SCL0.

Figure 18-20. Example of Master to Slave Communication
(When 9-clock Wait Is Selected for Both Master and Slave) (1/3)


(1) Start condition ~ address

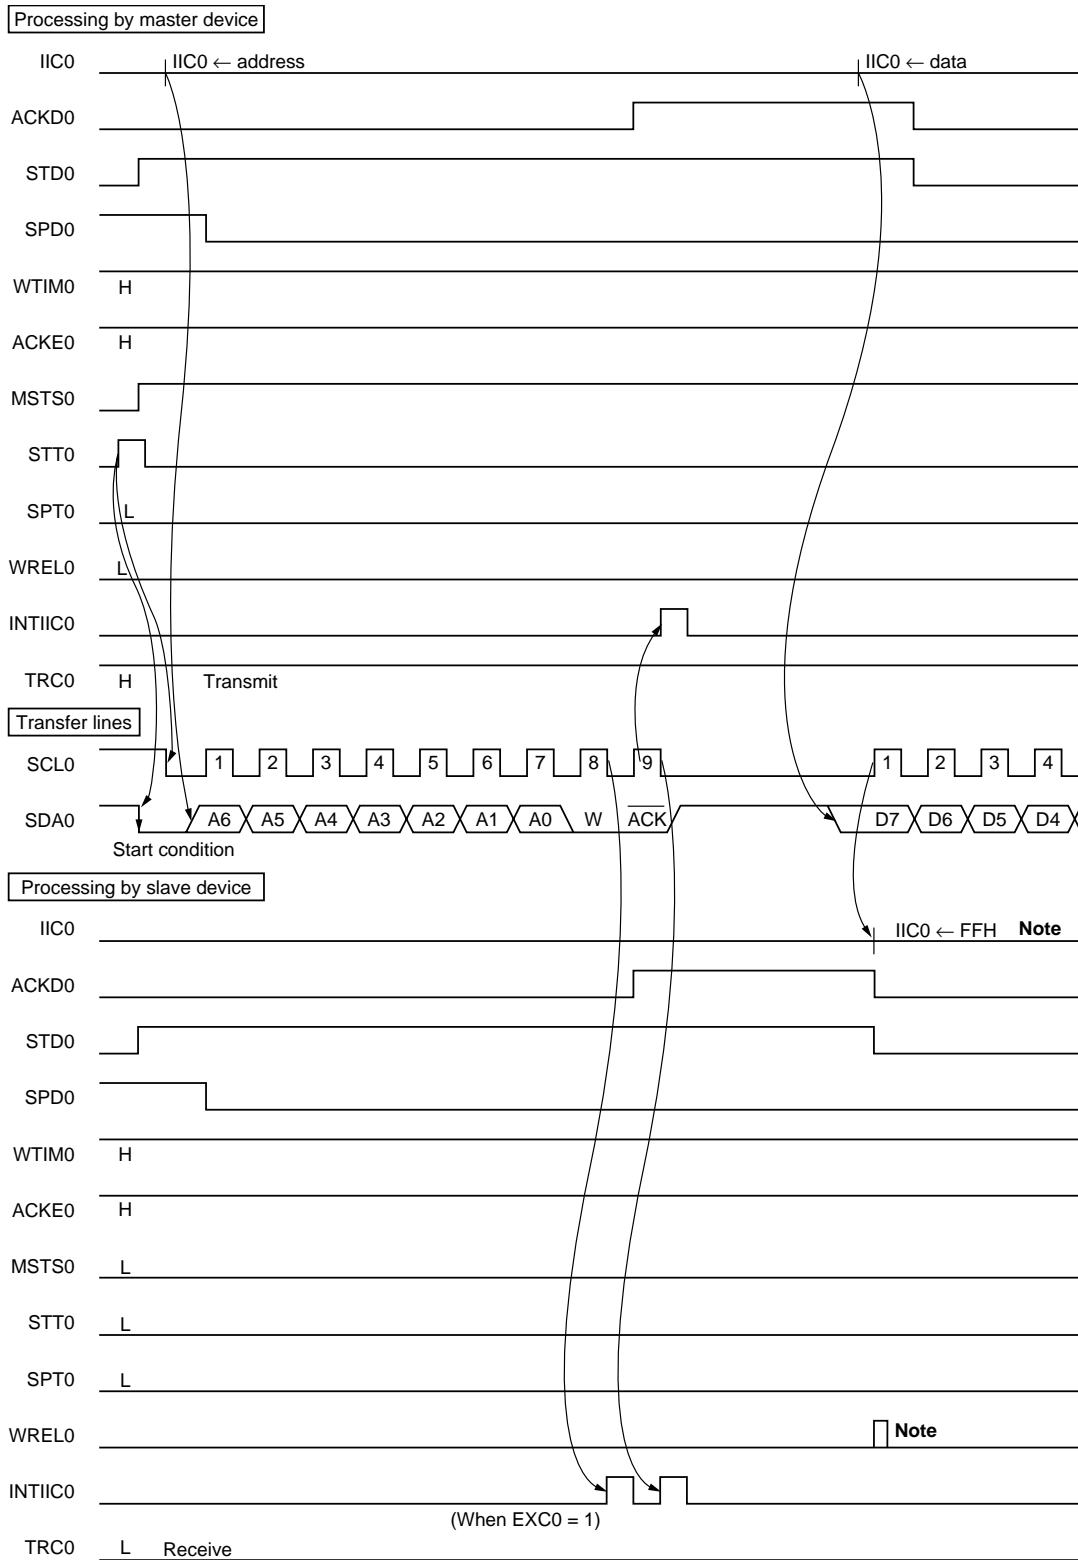

Note To cancel slave wait, write "FFH" to IIC0 or set WREL0.

**Figure 18-20. Example of Master to Slave Communication
(When 9-clock Wait Is Selected for Both Master and Slave) (2/3)**


(2) Data

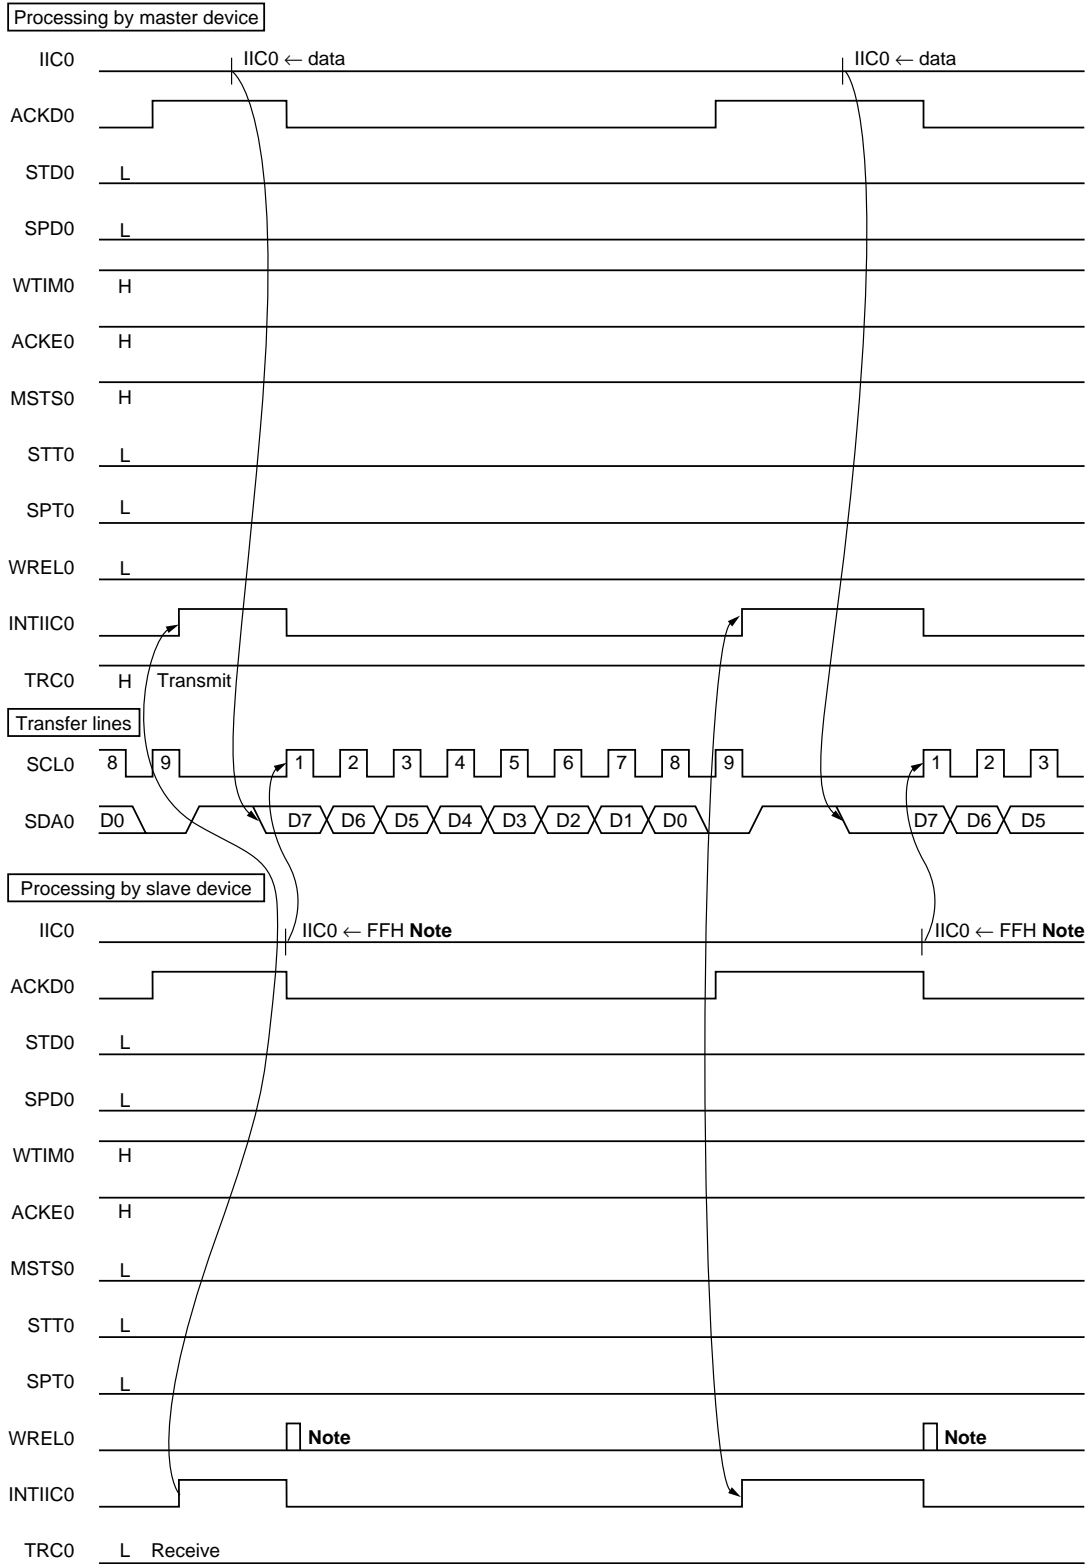

Note To cancel slave wait, write "FFH" to IIC0 or set WRELO.

**Figure 18-20. Example of Master to Slave Communication
(When 9-clock Wait Is Selected for Both Master and Slave) (3/3)**


(3) Stop condition

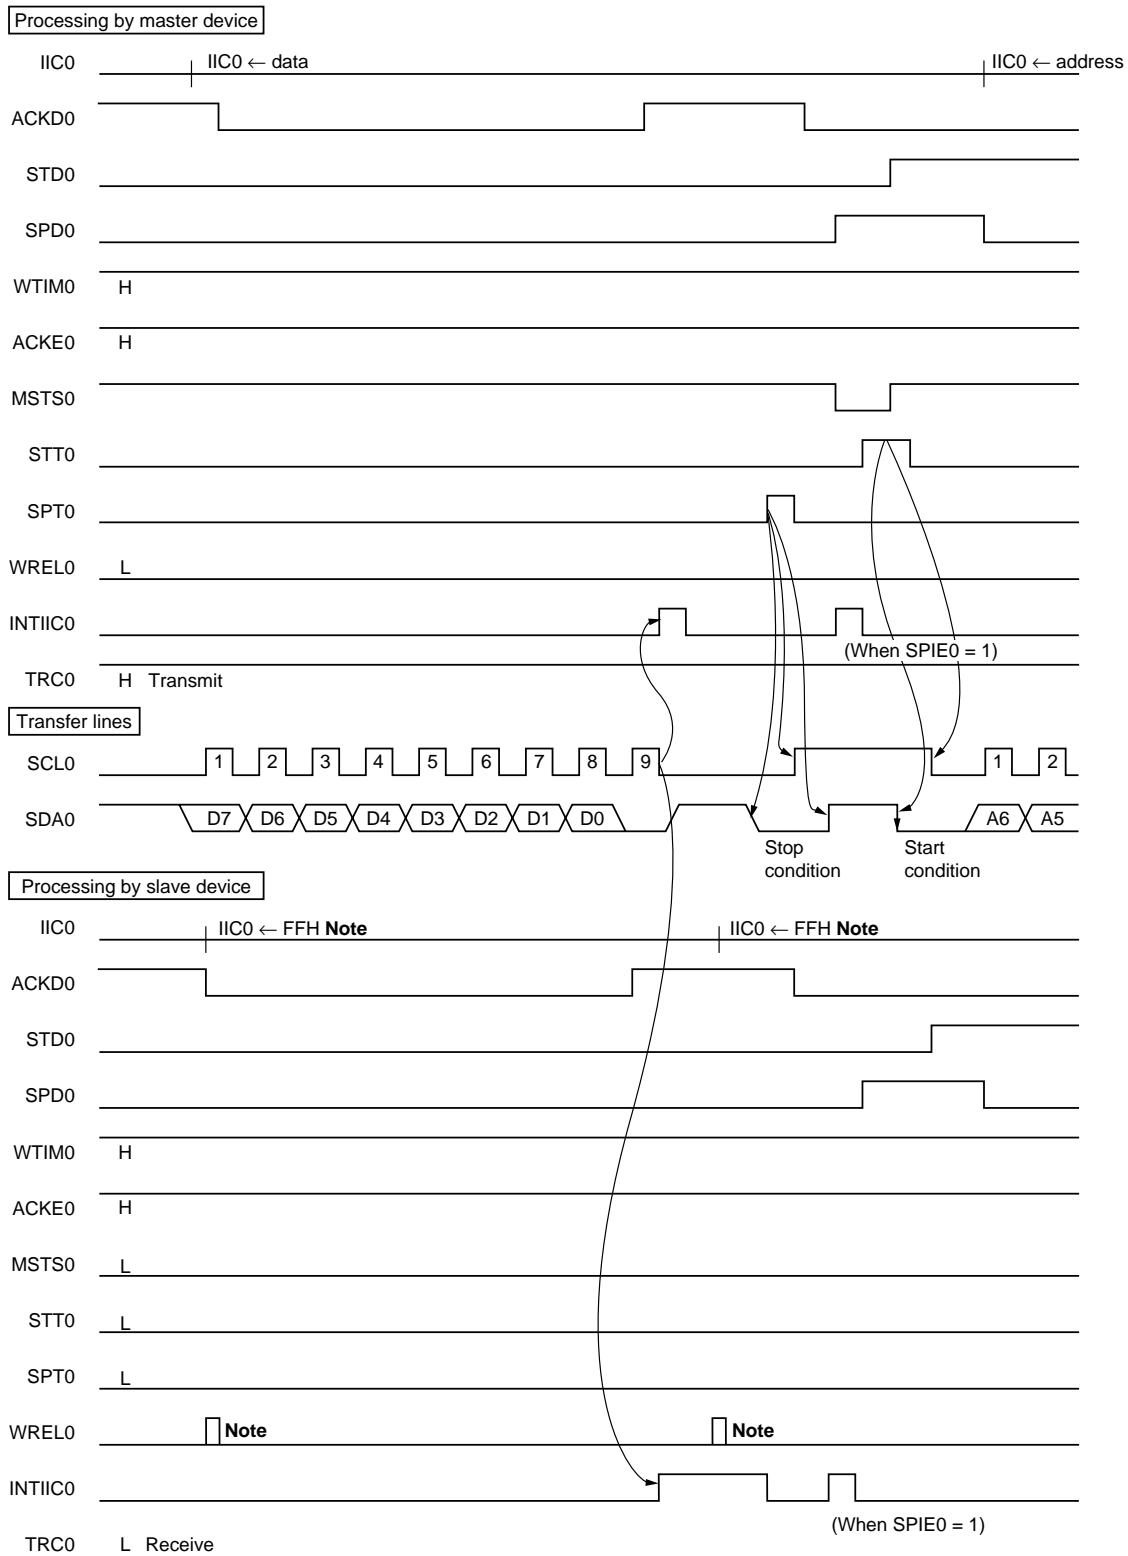

Note To cancel slave wait, write "FFH" to IIC0 or set WRELO.

**Figure 18-21. Example of Slave to Master Communication
(When 9-clock Wait Is Selected for Both Master and Slave) (1/3)**


(1) Start condition ~ address

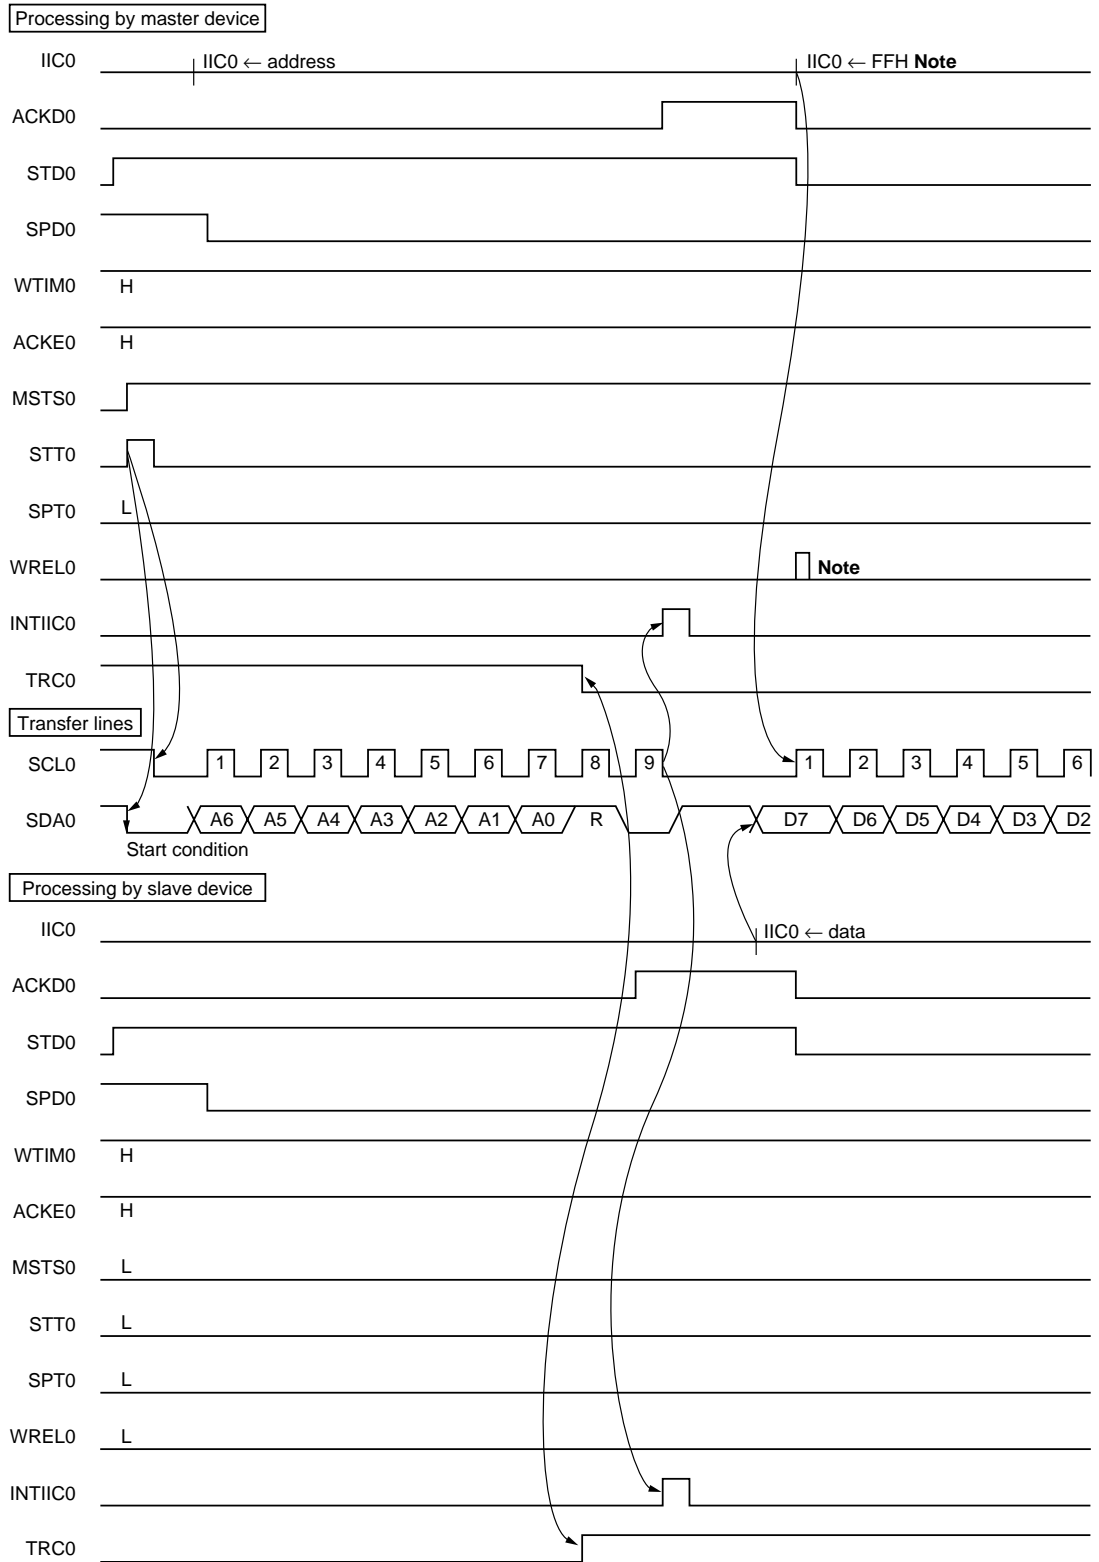

Note To cancel slave wait, write "FFH" to IIC0 or set WRELO.

Figure 18-21. Example of Slave to Master Communication
(When 9-clock Wait Is Selected for Both Master and Slave) (2/3)


(2) Data

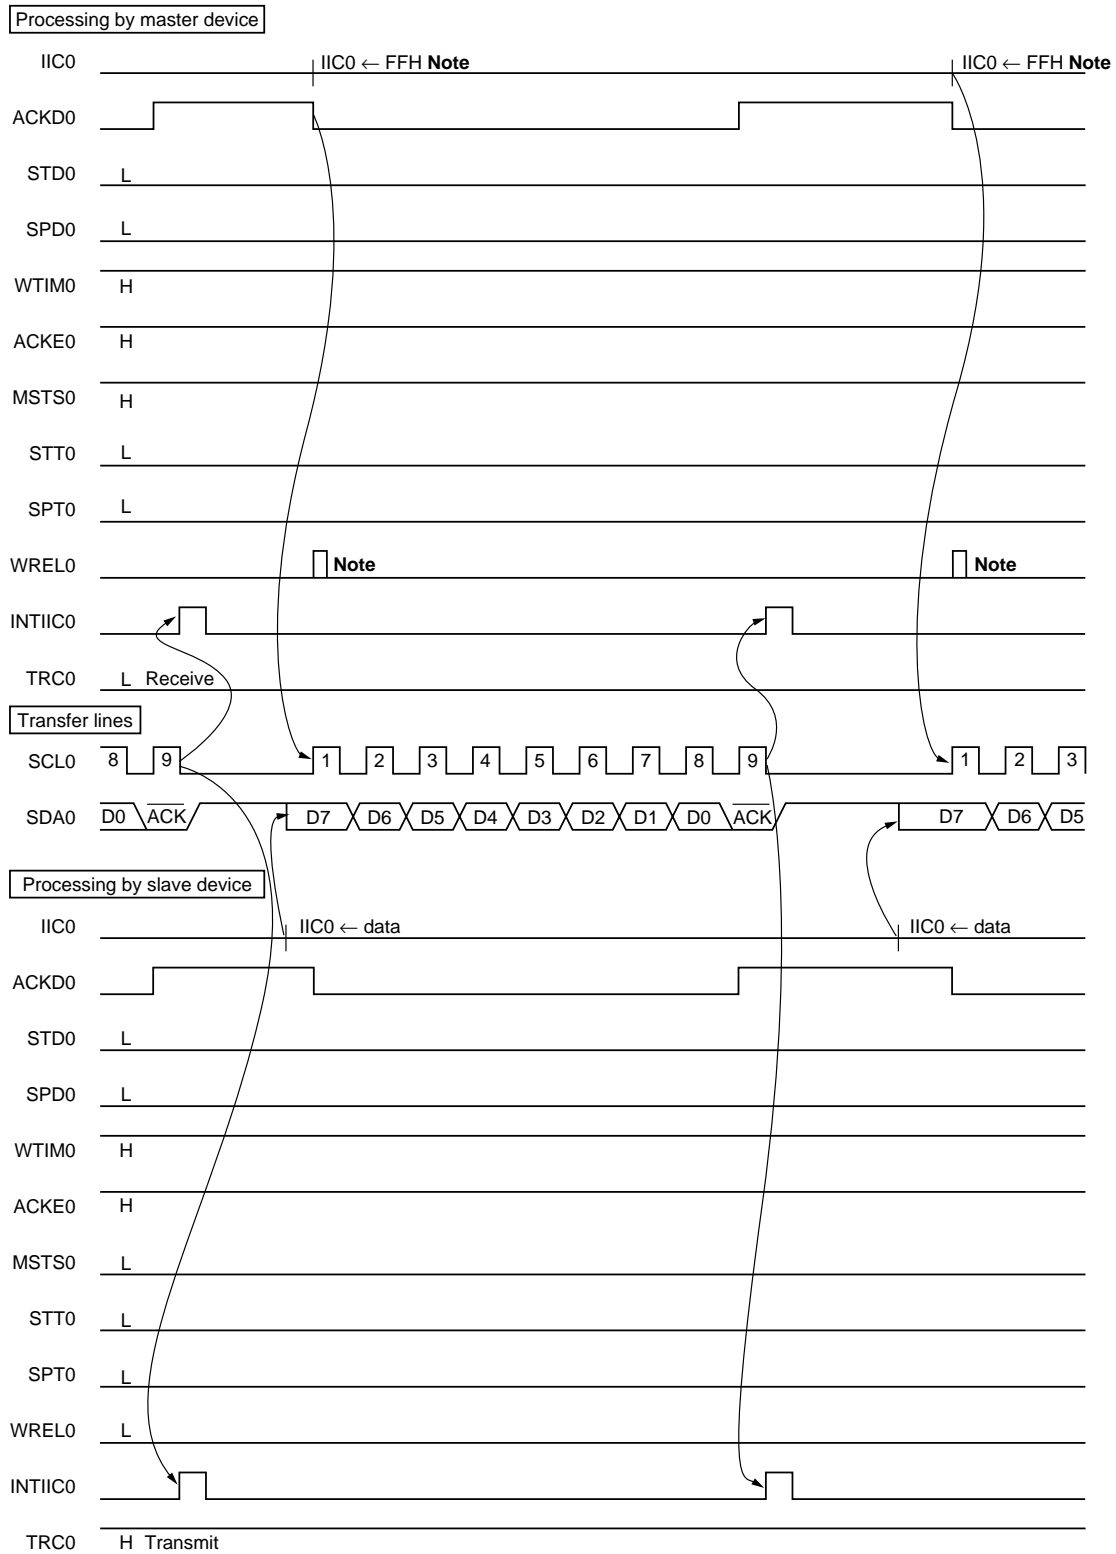

Note To cancel slave wait, write "FFH" to IIC0 or set WRELO.

**Figure 18-21. Example of Slave to Master Communication
(When 9-clock Wait Is Selected for Both Master and Slave) (3/3)**

(3) Stop condition

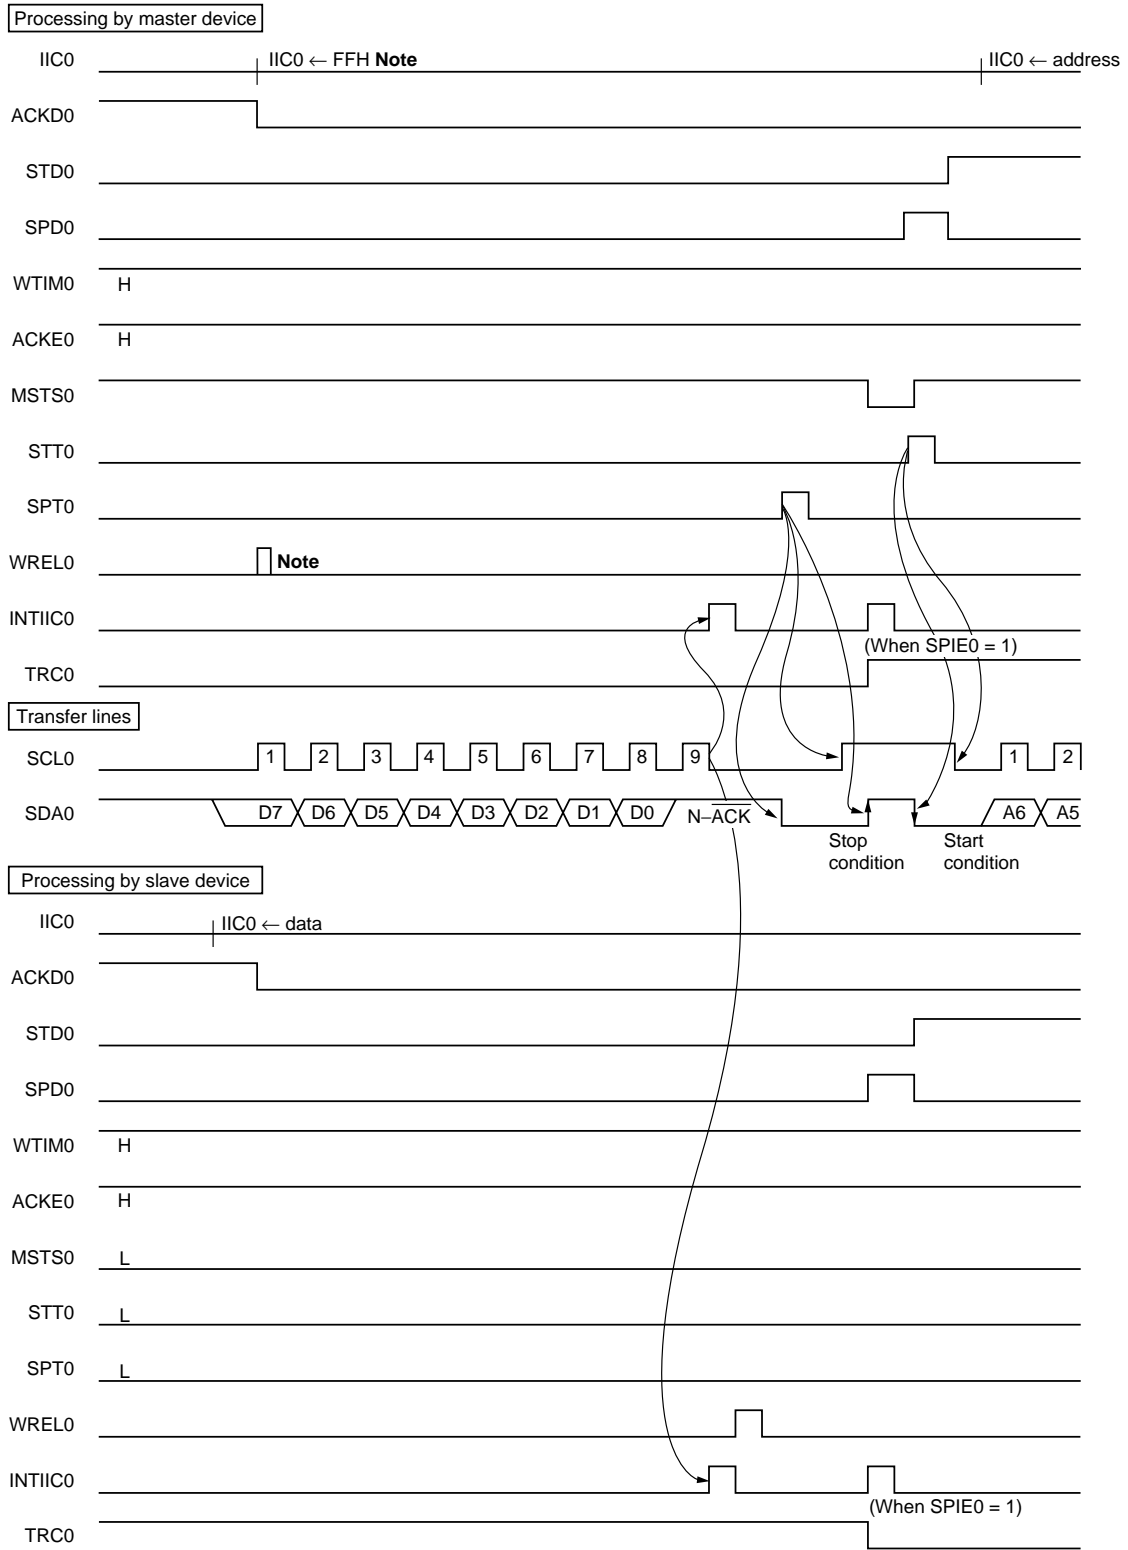

Note To cancel slave wait, write "FFH" to IIC0 or set WRELO.

[MEMO]

CHAPTER 19 INTERRUPT FUNCTIONS

19.1 Interrupt Function Types

The following three types of interrupt functions are used.

(1) Non-maskable interrupt

This interrupt is acknowledged unconditionally. It does not undergo priority control and is given top priority over all other interrupt requests.

It generates a standby release signal.

One interrupt from the watchdog timer is incorporated as a non-maskable interrupt.

(2) Maskable interrupts

These interrupts undergo mask control. Maskable interrupts can be divided into a high interrupt priority group and a low interrupt priority group by setting the priority specification flag registers (PR0L, PR0H, PR1L).

Multiple high priority interrupts can be applied to low priority interrupts. If two or more interrupts with the same priority are simultaneously generated, each interrupt has a predetermined priority (see **Table 19-1**).

A standby release signal is generated.

Five external interrupts request and 16 internal interrupts request are incorporated as maskable interrupts.

(3) Software interrupt

This is a vectored interrupt to be generated by executing the BRK instruction. It is acknowledged even in a disabled state. The software interrupt does not undergo interrupt priority control.

19.2 Interrupt Sources and Configuration

A total of 20 interrupt sources exist among non-maskable, maskable, and software interrupts (see **Table 19-1**).


Table 19-1. Interrupt Source List

Interrupt Type	Default Priority ^{Note 1}	Interrupt Source		Internal/ External	Vector Table Address	Basic Configuration Type ^{Note 2}		
		Name	Trigger					
Non-maskable	—	INTWDT	Watchdog timer overflow (with watchdog timer mode 1 selected)	Internal	0004H	(A)		
Maskable	0	INTWDT	Watchdog timer overflow (with interval timer mode selected)			External	0006H 0008H 000AH 000CH	(B)
	1	INTP0	Pin input edge detection	Internal	000EH 0010H 0012H 0014H 0016H 0018H 001AH 001CH 001EH 0020H 0022H 0024H 0026H			(B)
	2	INTP1						
	3	INTP2						
	4	INTP3						
	5	INTSER0	Serial interface UART0 reception error generation					
	6	INTSR0	End of serial interface UART0 reception					
	7	INTST0	End of serial interface UART0 transmission					
	8	INTCSI30	End of serial interface SIO3 (SIO30) transfer					
	9	INTCSI31	End of serial interface SIO3 (SIO31) transfer [Only for μ PD780024A, 780034A Subseries]					
	10	INTIIC0	End of serial interface IIC0 transfer [Only for μ PD780024AY, 780034AY Subseries]					
	11	INTWTI	Reference time interval signal from watch timer					
	12	INTTM00	Match between TM0 and CR00 (when CR00 is specified as compare register) Detection of TI01 valid edge (when CR00 is specified as capture register)					
	13	INTTM01	Match between TM0 and CR01 (when CR01 is specified as compare register) Detection of TI00 valid edge (when CR01 is specified as capture register)					
	14	INTTM50	Match between TM50 and CR50					
	15	INTTM51	Match between TM51 and CR51					
	16	INTAD0	End of A/D converter conversion					
	17	INTWT	Watch timer overflow					
18	INTKR	Port 4 falling edge detection	External	0028H	(D)			
Software	—	BRK	BRK instruction execution	—	003EH	(E)		


- Notes**
1. The default priority is the priority applicable when two or more maskable interrupt are generated simultaneously. 0 is the highest priority, and 18 is the lowest.
 2. Basic configuration types (A) to (E) correspond to (A) to (E) in Figure 19-1.

Figure 19-1. Basic Configuration of Interrupt Function (1/2)

(A) Internal non-maskable interrupt

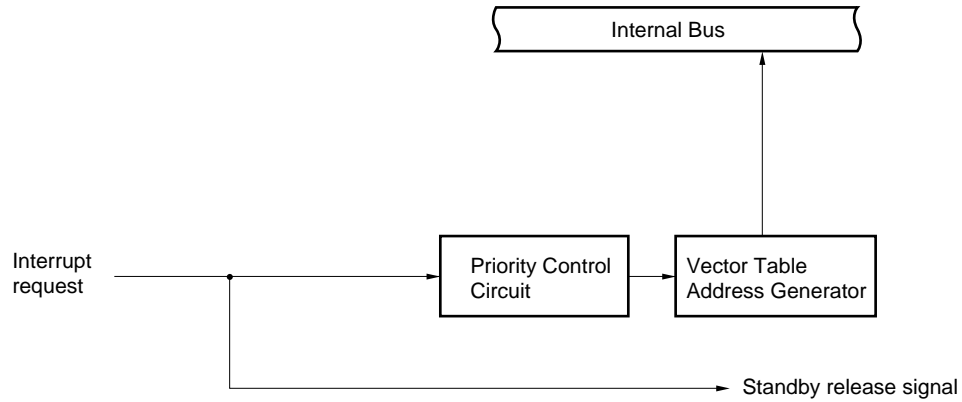

(B) Internal maskable interrupt

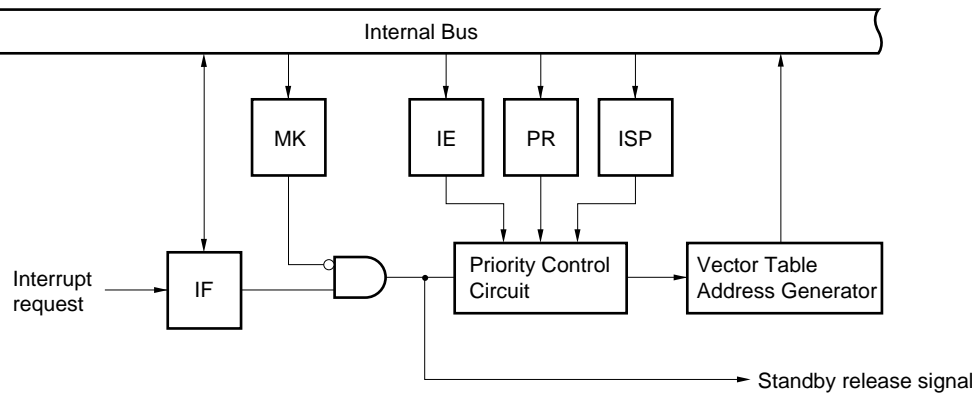

(C) External maskable interrupt (INTP0 to INTP3)



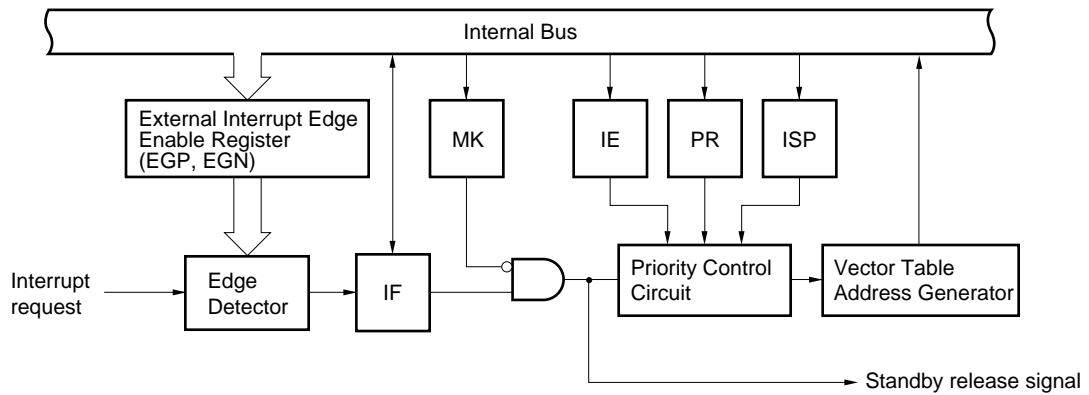


Figure 19-1. Basic Configuration of Interrupt Function (2/2)

(D) External maskable interrupt (INTKR)

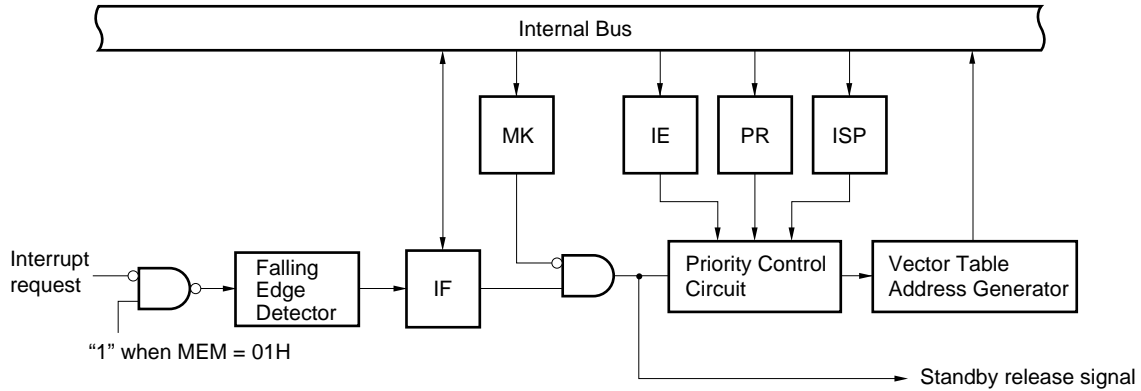

(E) Software interrupt

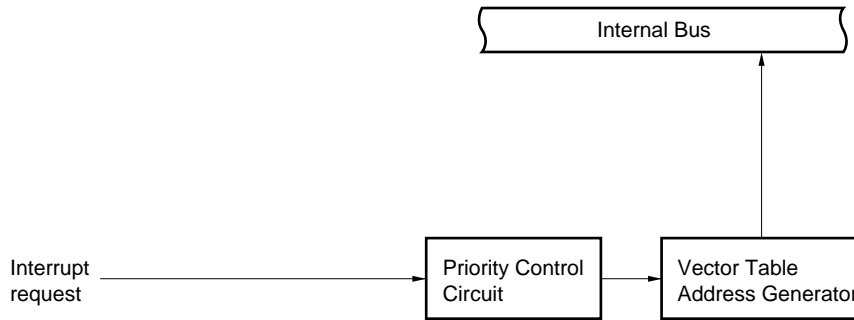

- IF : Interrupt request flag
- IE : Interrupt enable flag
- ISP : In-service priority flag
- MK : Interrupt mask flag
- PR : Priority specification flag
- MEM : Memory expansion mode register

19.3 Interrupt Function Control Registers

The following 6 types of registers are used to control the interrupt functions.

- Interrupt request flag register (IF0L, IF0H, IF1L)
- Interrupt mask flag register (MK0L, MK0H, MK1L)
- Priority specification flag register (PR0L, PR0H, PR1L)
- External interrupt rising edge enable flag (EGP)
- External interrupt falling edge enable flag (EGN)
- Program status word (PSW)

Table 19-2 gives a list of interrupt request flags, interrupt mask flags, and priority specification flags corresponding to interrupt request sources.

Table 19-2. Flags Corresponding to Interrupt Request Sources

Interrupt Request	Interrupt Request Flag		Interrupt Mask Flag		Priority Specification Flag				
		Register		Register		Register			
INTWDT	WDTIF	IF0L	WDTMK	MK0L	WDTPR	PR0L			
INTP0	PIF0		PMK0		PPR0				
INTP1	PIF1		PMK1		PPR1				
INTP2	PIF2		PMK2		PPR2				
INTP3	PIF3		PMK3		PPR3				
INTSER0	SERIF0		SERMK0		SERPR0				
INTSR0	SRIF0		SRMK0		SRPR0				
INTST0	STIF0		STMK0		STPR0				
INTCSI30	CSIF30		IF0H		CSIMK30		MK0H	CSIPR30	PR0H
INTCSI31 ^{Note 1}	CSIF31 ^{Note 1}				CSIMK31 ^{Note 1}			CSIPR31 ^{Note 1}	
INTIIC0 ^{Note 2}	IICIF0 ^{Note 2}	IICMK0 ^{Note 2}		IICPR0 ^{Note 2}					
INTWTI	WTIIF	WTIMK		WTIPR					
INTTM00	TMIF00	TMMK00		TMPR00					
INTTM01	TMIF01	TMMK01		TMPR01					
INTTM50	TMIF50	TMMK50		TMPR50					
INTTM51	TMIF51	TMMK51		TMPR51					
INTAD0	ADIF0	IF1L	ADMK0	MK1L	ADPR0	PR1L			
INTWT	WTIF		WTMK		WTPR				
INTKR	KRIF		KRMK		KRPR				

- Notes**
1. μ PD780024A, 780034A Subseries only
 2. μ PD780024AY, 780034AY Subseries only

(1) Interrupt request flag registers (IF0L, IF0H, IF1L)

The interrupt request flags are set to 1 when the corresponding interrupt request is generated or an instruction is executed. They are cleared to 0 when an instruction is executed upon acknowledgment of an interrupt request or upon application of $\overline{\text{RESET}}$ input.

IF0L, IF0H, and IF1L are set by a 1-bit or 8-bit memory manipulation instruction. When IF0L and IF0H are combined to form 16-bit register IF0, they are read with a 16-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets these registers to 00H.

Figure 19-2. Interrupt Request Flag Register (IF0L, IF0H, IF1L) Format

Address: FFE0H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
IF0L	STIF0	SRIF0	SERIF0	PIF3	PIF2	PIF1	PIF0	WDTIF

Address: FFE1H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
IF0H	TMIF51	TMIF50	TMIF01	TMIF00	WTIIF	IICIF0 ^{Note 1}	CSIF31 ^{Note 2}	CSIF30

Address: FFE2H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
IF1L	0	0	0	0	0	KRIF	WTIF	ADIF0

XXIFX	Interrupt Request Flag
0	No interrupt request signal is generated
1	Interrupt request is generated, interrupt request status

- Notes**
1. Incorporated only in the μ PD780024AY, 780034AY Subseries. Be sure to set 0 for the μ PD780024A, 780034A Subseries.
 2. Incorporated only in the μ PD780024A and 780034A Subseries. Be sure to set 0 for the μ PD780024AY, 780034AY Subseries.

- Cautions**
1. The WDTIF flag is R/W enabled only when the watchdog timer is used as the interval timer. If watchdog timer mode 1 is used, set the WDTIF flag to 0.
 2. Be sure to set bits 3 to 7 to 0.
 3. When operating a timer, serial interface, or A/D converter after stand-by release, run it once after clearing an interrupt request flag. An interrupt request flag may be set by noise.

(2) Interrupt mask flag registers (MK0L, MK0H, MK1L)

The interrupt mask flags are used to enable/disable the corresponding maskable interrupt service and to set standby clear enable/disable.

MK0L, MK0H, and MK1L are set by a 1-bit or 8-bit memory manipulation instruction. When MK0L and MK0H are combined to form a 16-bit register, they are set with a 16-bit memory manipulation instruction.

RESET input sets these registers to FFH.

Figure 19-3. Interrupt Mask Flag Register (MK0L, MK0H, MK1L) Format

Address: FFE4H After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
MK0L	STMK0	SRMK0	SERMK0	PMK3	PMK2	PMK1	PMK0	WDTMK

Address: FFE5H After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
MK0H	TMMK51	TMMK50	TMMK01	TMMK00	WTIMK	IICMK0 ^{Note 1}	CSIMK31 ^{Note 2}	CSIMK30

Address: FFE6H After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
MK1L	1	1	1	1	1	KRMK	WTMK	ADMK0

XXMKX	Interrupt Servicing Control							
0	Interrupt servicing enabled							
1	Interrupt servicing disabled							

- Notes**
1. Incorporated only in the μPD780024AY, 780034AY Subseries. Be sure to set 1 for the μPD780024A, 780034A Subseries.
 2. Incorporated only in the μPD780024A and 780034A Subseries. Be sure to set 1 for the μPD780024AY, 780034AY Subseries.

- Cautions**
1. If the watchdog timer is used in watchdog timer mode 1, the contents of the WDTMK flag become undefined when read.
 2. Because port 0 pins have an alternate function as external interrupt request input, when the output level is changed by specifying the output mode of the port function, an interrupt request flag is set. Therefore, 1 should be set in the interrupt mask flag before using the output mode.
 3. Be sure to set bits 3 to 7 of MK1L to 1.

(3) Priority specification flag registers (PR0L, PR0H, PR1L)

The priority specification flag registers are used to set the corresponding maskable interrupt priority orders. PR0L, PR0H, and PR1L are set by a 1-bit or 8-bit memory manipulation instruction. If PR0L and PR0H are combined to form 16-bit register PR0, they are set with a 16-bit memory manipulation instruction. RESET input sets these registers to FFH.

Figure 19-4. Priority Specification Flag Register (PR0L, PR0H, PR1L) Format

Address: FFE8H After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PR0L	STPR0	SRPR0	SERPR0	PPR3	PPR2	PPR1	PPR0	WDTPR

Address: FFE9H After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PR0H	TMPR51	TMPR50	TMPR01	TMPR00	WTIPR	IICPR0 ^{Note 1}	CSIPR31 ^{Note 2}	CSIPR30

Address: FFEAH After Reset: FFH R/W

Symbol	7	6	5	4	3	2	1	0
PR1L	1	1	1	1	1	KRPR	WTPR	ADPR0

XXPRX	Priority Level Selection
0	High priority level
1	Low priority level

- Notes**
1. Incorporated only in the μ PD780024AY, 780034AY Subseries. Be sure to set 1 for the μ PD780024A, 780034A Subseries.
 2. Incorporated only in the μ PD780024A and 780034A Subseries. Be sure to set 1 for the μ PD780024AY, 780034AY Subseries.

- Cautions**
1. When the watchdog timer is used in the watchdog timer 1 mode, set 1 in the WDTPR flag.
 2. Be sure to set bits 3 to 7 of PR1L to 1.

(4) External interrupt rising edge enable register (EGP), External interrupt falling edge enable register (EGN)

These registers specify the valid edge for INTTP0 to INTTP3.

EGP and EGN are set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets these registers to 00H.

Figure 19-5. External Interrupt Rising Edge Enable Register (EGP), External Interrupt Falling Edge Enable Register (EGN) Format

Address: FF48H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
EGP	0	0	0	0	EGP3	EGP2	EGP1	EGP0

Address: FF49H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
EGN	0	0	0	0	EGN3	EGN2	EGN1	EGN0


EGPn	EGNn	INTPn Pin Valid Edge Selection (n = 0 to 3)
0	0	Interrupt disable
0	1	Falling edge
1	0	Rising edge
1	1	Both rising and falling edges

(5) Program status word (PSW)

The program status word is a register to hold the instruction execution result and the current status for an interrupt request. The IE flag to set maskable interrupt enable/disable and the ISP flag to control nesting processing are mapped.

Besides 8-bit read/write, this register can carry out operations with a bit manipulation instruction and dedicated instructions (EI and DI). When a vectored interrupt request is acknowledged, if the BRK instruction is executed, the contents of PSW are automatically saved into a stack and the IE flag is reset to 0. If a maskable interrupt request is acknowledged, the contents of the priority specification flag of the acknowledged interrupt are transferred to the ISP flag. The PSW contents are also saved into the stack with the PUSH PSW instruction. They are reset from the stack with the RETI, RETB, and POP PSW instructions. RESET input sets PSW to 02H.

Figure 19-6. Program Status Word Format

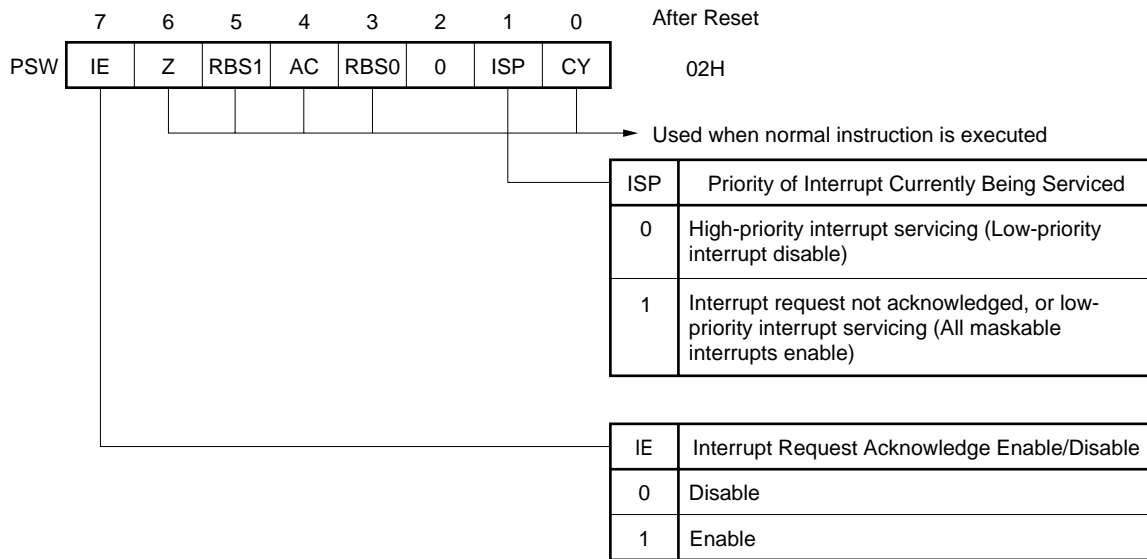

19.4 Interrupt Servicing Operations


19.4.1 Non-maskable interrupt request acknowledge operation

A non-maskable interrupt request is unconditionally acknowledged even if in an interrupt acknowledge disable state. It does not undergo interrupt priority control and has highest priority over all other interrupts.

If a non-maskable interrupt request is acknowledged, the contents are saved into the stacks in the order of PSW, then PC, the IE flag and ISP flag are reset (0), and the contents of the vector table are loaded into PC and branched.


A new non-maskable interrupt request generated during execution of a non-maskable interrupt servicing program is acknowledged after the current execution of the non-maskable interrupt servicing program is terminated (following RETI instruction execution) and one main routine instruction is executed. However, if a new non-maskable interrupt request is generated twice or more during non-maskable interrupt servicing program execution, only one non-maskable interrupt request is acknowledged after termination of the non-maskable interrupt servicing program execution. Figures 19-7, 19-8, and 19-9 show the flowchart of the non-maskable interrupt request generation through acknowledge, acknowledge timing of non-maskable interrupt request, and acknowledge operation at multiple non-maskable interrupt request generation, respectively.

Figure 19-7. Non-Maskable Interrupt Request Generation to Acknowledge Flowchart

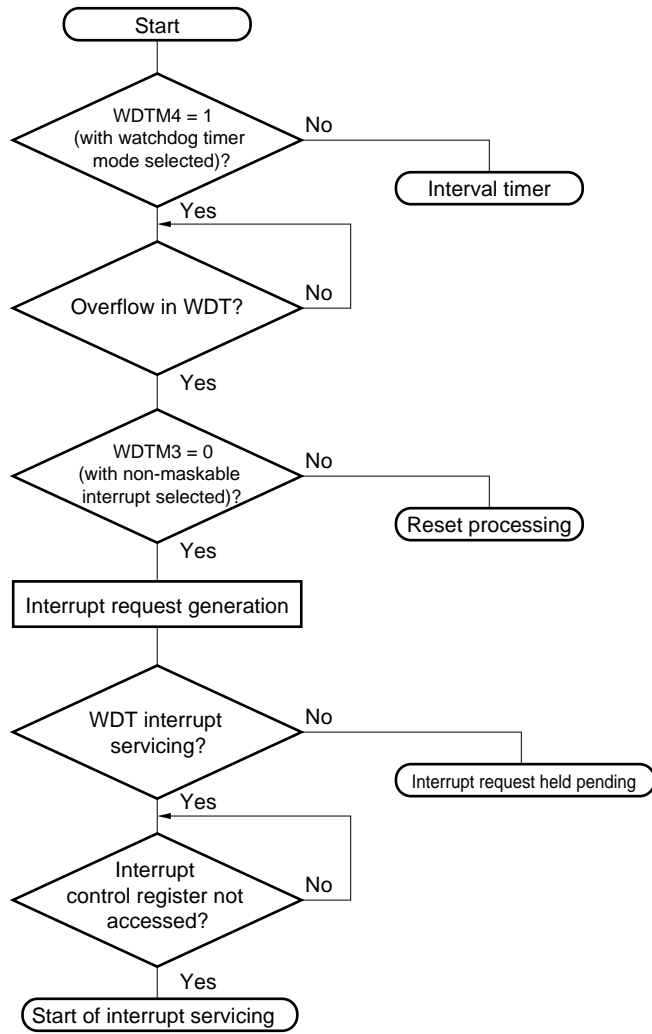

WDTM: Watchdog timer mode register
 WDT : Watchdog timer


Figure 19-8. Non-Maskable Interrupt Request Acknowledge Timing

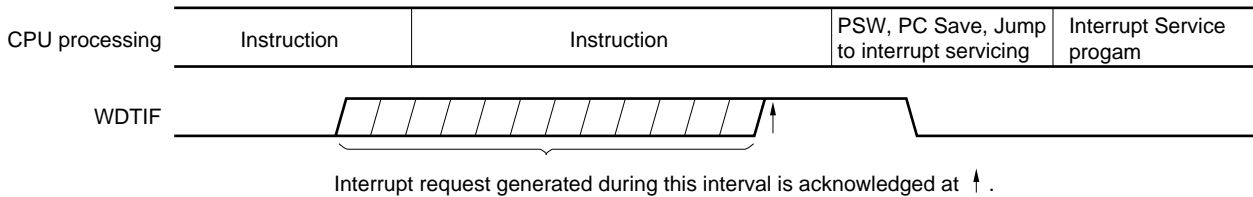


WDTIF: Watchdog timer interrupt request flag

Figure 19-9. Non-Maskable Interrupt Request Acknowledge Operation

(a) If a non-maskable interrupt request is generated during non-maskable interrupt servicing program execution

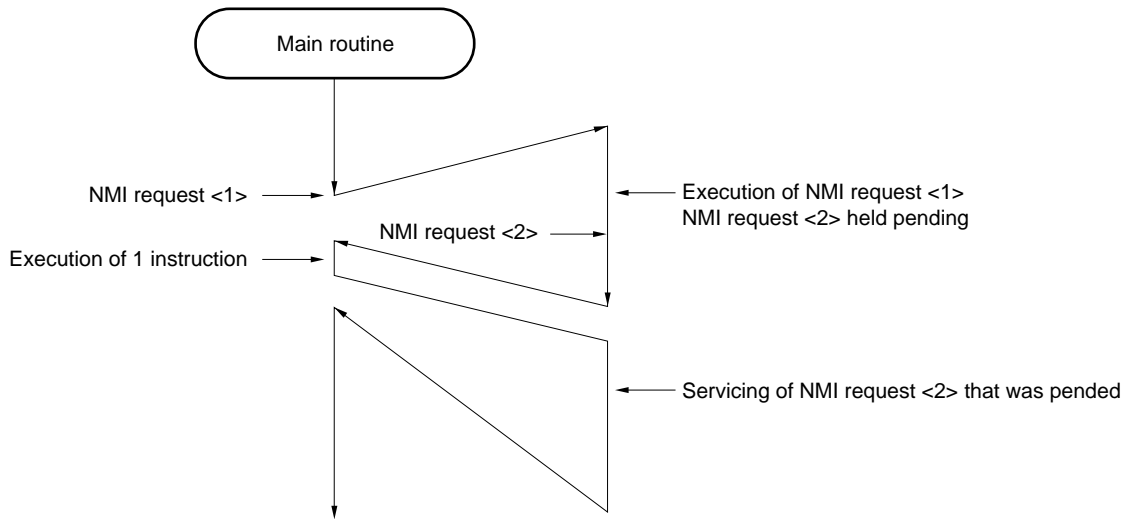

(b) If two non-maskable interrupt requests are generated during non-maskable interrupt servicing program execution

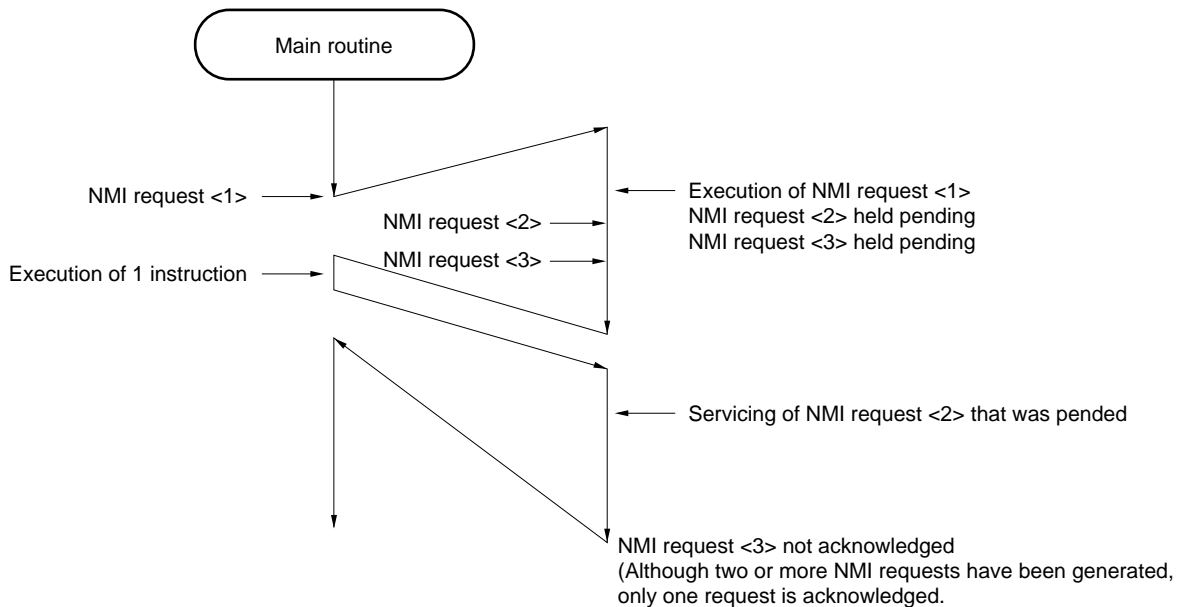

19.4.2 Maskable interrupt acknowledge operation

A maskable interrupt becomes acknowledgeable when an interrupt request flag is set to 1 and the mask (MK) flag corresponding to that interrupt request is cleared to 0. A vectored interrupt request is acknowledged if in the interrupt enable state (when IE flag is set to 1). However, a low-priority interrupt request is not acknowledged during servicing of a higher priority interrupt request (when the ISP flag is reset to 0). The times from generation of a maskable interrupt request until interrupt servicing is performed are listed in Table 19-3 below.

For the interrupt request acknowledge timing, see **Figures 19-11** and **19-12**.

Table 19-3. Times from Generation of Maskable Interrupt until Servicing

	Minimum Time	Maximum Time ^{Note}
When $\times\times\text{PR} = 0$	7 clocks	32 clocks
When $\times\times\text{PR} = 1$	8 clocks	33 clocks

Note If an interrupt request is generated just before a divide instruction, the wait time becomes longer.

Remark 1 clock: $1/f_{\text{CPU}}$ (f_{CPU} : CPU clock)

If two or more interrupt requests are generated simultaneously, the request with a higher priority level specified in the priority specification flag is acknowledged first. If two or more interrupts requests have the same priority level, the request with the highest default priority is acknowledged first.

An interrupt request that is held pending is acknowledged when it becomes acknowledgeable.

Figure 19-10 shows the interrupt request acknowledge algorithm.

If a maskable interrupt request is acknowledged, the contents are saved into the stacks in the order of PSW, then PC, the IE flag is reset (0), and the contents of the priority specification flag corresponding to the acknowledged interrupt are transferred to the ISP flag. Further, the vector table data determined for each interrupt request is loaded into PC and branched.

Return from an interrupt is possible with the RETI instruction.

Figure 19-10. Interrupt Request Acknowledge Processing Algorithm



xxIF : Interrupt request flag


xxMK : Interrupt mask flag

xxPR : Priority specification flag

IE : Flag that controls acknowledge of maskable interrupt request (1 = Enable, 0 = Disable)


ISP : Flag that indicates the priority level of the interrupt currently being serviced (0 = high-priority interrupt servicing, 1 = No interrupt request received, or low-priority interrupt servicing)

Figure 19-11. Interrupt Request Acknowledge Timing (Minimum Time)

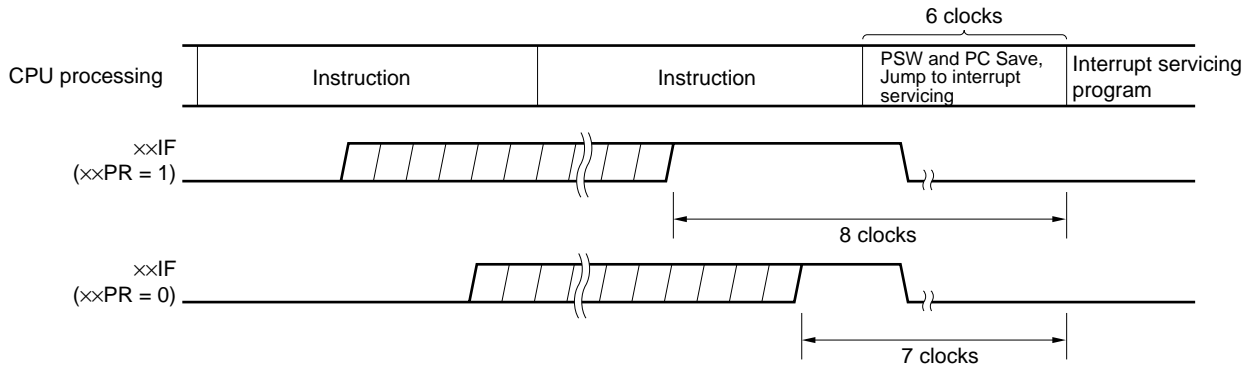

Remark 1 clock: $1/f_{CPU}$ (f_{CPU} : CPU clock)

Figure 19-12. Interrupt Request Acknowledge Timing (Maximum Time)

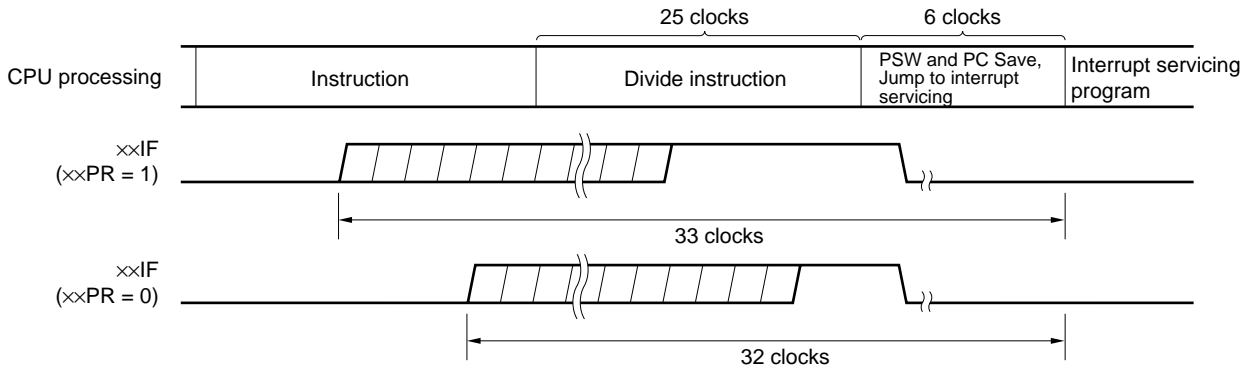

Remark 1 clock: $1/f_{CPU}$ (f_{CPU} : CPU clock)

19.4.3 Software interrupt request acknowledge operation

A software interrupt acknowledge is acknowledged by BRK instruction execution. Software interrupts cannot be disabled.

If a software interrupt request is acknowledged, the contents are saved into the stacks in the order of the program status word (PSW), then program counter (PC), the IE flag is reset (0), and the contents of the vector table (003EH, 003FH) are loaded into PC and branched.

Return from a software interrupt is possible with the RETB instruction.

Caution Do not use the RETI instruction for returning from the software interrupt.

19.4.4 Nesting interrupt servicing

Nesting occurs when another interrupt request is acknowledged during execution of an interrupt.

Nesting does not occur unless the interrupt request acknowledge enable state is selected (IE = 1) (except non-maskable interrupts). Also, when an interrupt request is received, interrupt requests acknowledge becomes disabled (IE = 0). Therefore, to enable nesting, it is necessary to set (1) the IE flag with the EI instruction during interrupt servicing to enable interrupt acknowledge.

Moreover, even if interrupts are enabled, nesting may not be enabled, this being subject to interrupt priority control. Two types of priority control are available: default priority control and programmable priority control. Programmable priority control is used for nesting.

In the interrupt enable state, if an interrupt request with a priority equal to or higher than that of the interrupt currently being serviced is generated, it is acknowledged for nesting. If an interrupt with a priority lower than that of the interrupt currently being serviced is generated during interrupt servicing, it is not acknowledged for nesting. Interrupt requests that are not enabled because of the interrupt disable state or they have a lower priority are held pending. When servicing of the current interrupt ends, the pended interrupt request is acknowledged following execution of one main processing instruction execution.

Nesting is not possible during non-maskable interrupt servicing.

Table 19-4 shows interrupt requests enabled for nesting and Figure 19-13 shows nesting examples.


Table 19-4. Interrupt Request Enabled for Nesting during Interrupt Servicing

Nesting Request Interrupt Being Serviced		Non-Maskable Interrupt Request	Maskable Interrupt Request			
			PR = 0		PR = 1	
			IE = 1	IE = 0	IE = 1	IE = 0
Non-maskable interrupt		×	×	×	×	×
Maskable interrupt	ISP = 0	○	○	×	×	×
	ISP = 1	○	○	×	○	×
Software interrupt		○	○	×	○	×

- Remarks**
1. ○ : Nesting enable
 2. × : Nesting disable
 3. ISP and IE are flags contained in PSW.
 ISP = 0 : An interrupt with higher priority is being serviced.
 ISP = 1 : No interrupt request has been acknowledged, or an interrupt with a lower priority is being serviced.
 IE = 0 : Interrupt request acknowledge is disabled.
 IE = 1 : Interrupt request acknowledge is enabled.
 4. PR is a flag contained in PR0L, PR0H, and PR1L.
 PR = 0 : Higher priority level
 PR = 1 : Lower priority level


Figure 19-13. Nesting Examples (1/2)

Example 1. Nesting occurs twice

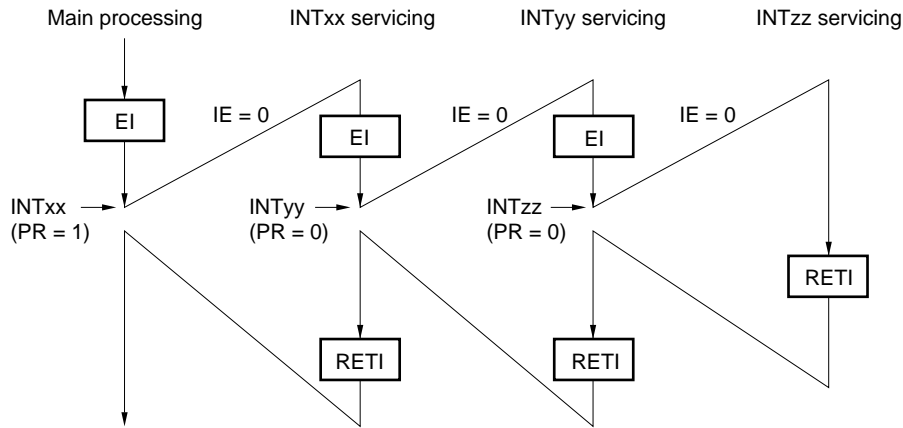

During servicing of interrupt INTxx, two interrupt requests, INTyy and INTzz, are acknowledged, and nesting takes place. Before each interrupt request is acknowledged, the EI instruction must always be issued to enable interrupt request acknowledge.


Example 2. Nesting does not occur due to priority control

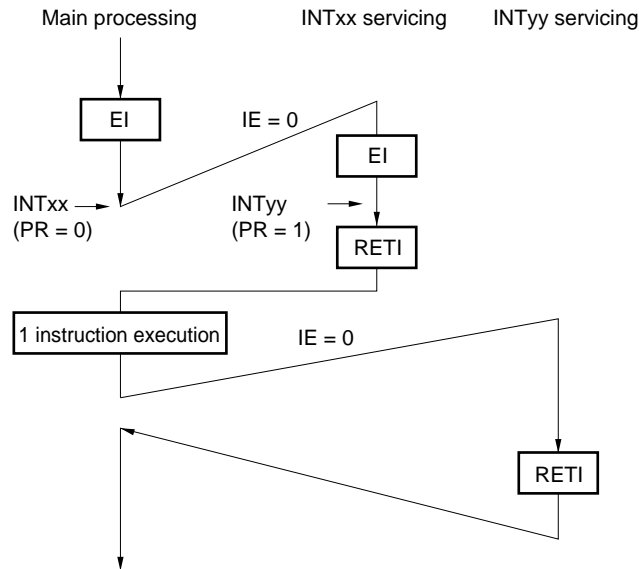

Interrupt request INTyy issued during servicing of interrupt INTxx is not acknowledged because its priority is lower than that of INTxx, and nesting does not take place. The INTyy interrupt request is held pending, and is acknowledged following execution of one main processing instruction.

- PR = 0 : Higher priority level
- PR = 1 : Lower priority level
- IE = 0 : Interrupt request acknowledge disable

Figure 19-13. Nesting Examples (2/2)

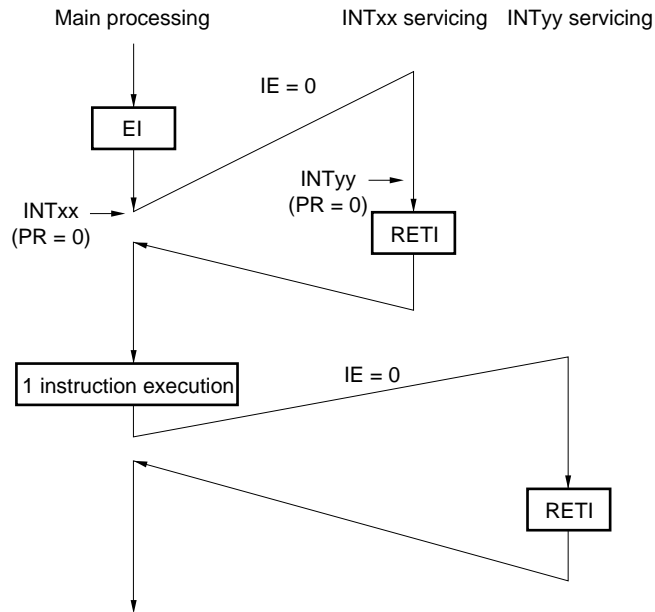Example 3. Nesting does not occur because interrupt is not enabled

Interrupt is not enabled during servicing of interrupt INTxx (EI instruction is not issued), therefore, interrupt request INTyy is not acknowledged and nesting does not take place. The INTyy interrupt request is held pending, and is acknowledged following execution of one main processing instruction.

PR = 0 : Higher priority level

IE = 0 : Interrupt request acknowledge disabled

19.4.5 Interrupt request hold


There are instructions where, even if an interrupt request is issued for them while another instruction is executed, request acknowledge is held pending until the end of execution of the next instruction. These instructions (interrupt request hold instructions) are listed below.

- MOV PSW, #byte
- MOV A, PSW
- MOV PSW, A
- MOV1 PSW. bit, CY
- MOV1 CY, PSW. bit
- AND1 CY, PSW. bit
- OR1 CY, PSW. bit
- XOR1 CY, PSW. bit
- SET1 PSW. bit
- CLR1 PSW. bit
- RETB
- RETI
- PUSH PSW
- POP PSW
- BT PSW. bit, \$addr16
- BF PSW. bit, \$addr16
- BTCLR PSW. bit, \$addr16
- EI
- DI
- Manipulate instructions for the IF0L, IF0H, IF1L, MK0L, MK0H, MK1L, PR0L, PR0H, PR1L, EGP, and EGN registers.

Caution The BRK instruction is not one of the above-listed interrupt request hold instructions. However, the software interrupt activated by executing the BRK instruction causes the IE flag to be cleared. Therefore, even if a maskable interrupt requests is generated during execution of the BRK instruction, the interrupt request is not acknowledged. However, a non-maskable interrupt request is acknowledged.

Figure 19-14 shows the timing with which interrupt requests are held pending.

Figure 19-14. Interrupt Request Hold

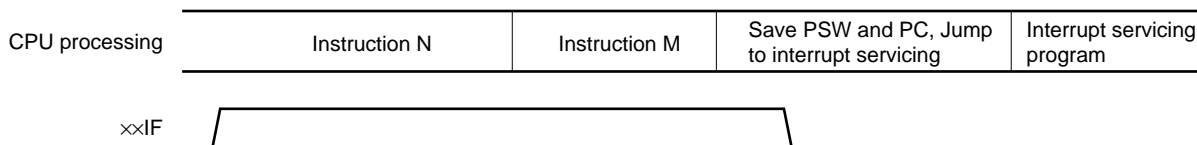

- Remarks**
1. Instruction N: Interrupt request hold instruction
 2. Instruction M: Instruction other than interrupt request hold instruction
 3. The $\times\times$ PR (priority level) values do not affect the operation of $\times\times$ IF (instruction request)

CHAPTER 20 EXTERNAL DEVICE EXPANSION FUNCTION

20.1 External Device Expansion Function

The external device expansion function connects external devices to areas other than the internal ROM, RAM, and SFR. Connection of external devices uses ports 4 to 6. Ports 4 to 6 control address/data, read/write strobe, wait, address strobe, etc.

Table 20-1. Pin Functions in External Memory Expansion Mode

Pin Function at External Device Connection		Alternate Function
Name	Function	
AD0 to AD7	Multiplexed address/data bus	P40 to P47
A8 to A15	Address bus	P50 to P57
$\overline{\text{RD}}$	Read strobe signal	P64
$\overline{\text{WR}}$	Write strobe signal	P65
$\overline{\text{WAIT}}$	Wait signal	P66
ASTB	Address strobe signal	P67

Table 20-2. State of Port 4 to 6 Pins in External Memory Expansion Mode

External Expansion Mode	Port	Port 5								Port 6							
	Port 4																
	0 to 7	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
Single-chip mode	Port	Port								Port							
256-byte expansion mode	Address/data	Port								Port				$\overline{\text{RD}}$, $\overline{\text{WR}}$, $\overline{\text{WAIT}}$, ASTB			
4-Kbyte expansion mode	Address/data	Address				Port				Port				$\overline{\text{RD}}$, $\overline{\text{WR}}$, $\overline{\text{WAIT}}$, ASTB			
16-Kbyte expansion mode	Address/data	Address				Port				Port				$\overline{\text{RD}}$, $\overline{\text{WR}}$, $\overline{\text{WAIT}}$, ASTB			
Full-address mode	Address/data	Address								Port				$\overline{\text{RD}}$, $\overline{\text{WR}}$, $\overline{\text{WAIT}}$, ASTB			

Caution When the external wait function is not used, the $\overline{\text{WAIT}}$ pin can be used as a port in all modes.

The memory maps when the external device expansion function is used are as follows.

Figure 20-1. Memory Map When Using External Device Function (1/2)

- (a) Memory map of μ PD780021A, 780031A, 780021AY, 780031AY and of μ PD78F0034A, 78F0034AY when internal ROM (flash memory) size is 8 KB
- (b) Memory map of μ PD780022A, 780032A, 780022AY, 780032AY and of μ PD78F0034A, 78F0034AY when internal ROM (flash memory) size is 16 KB



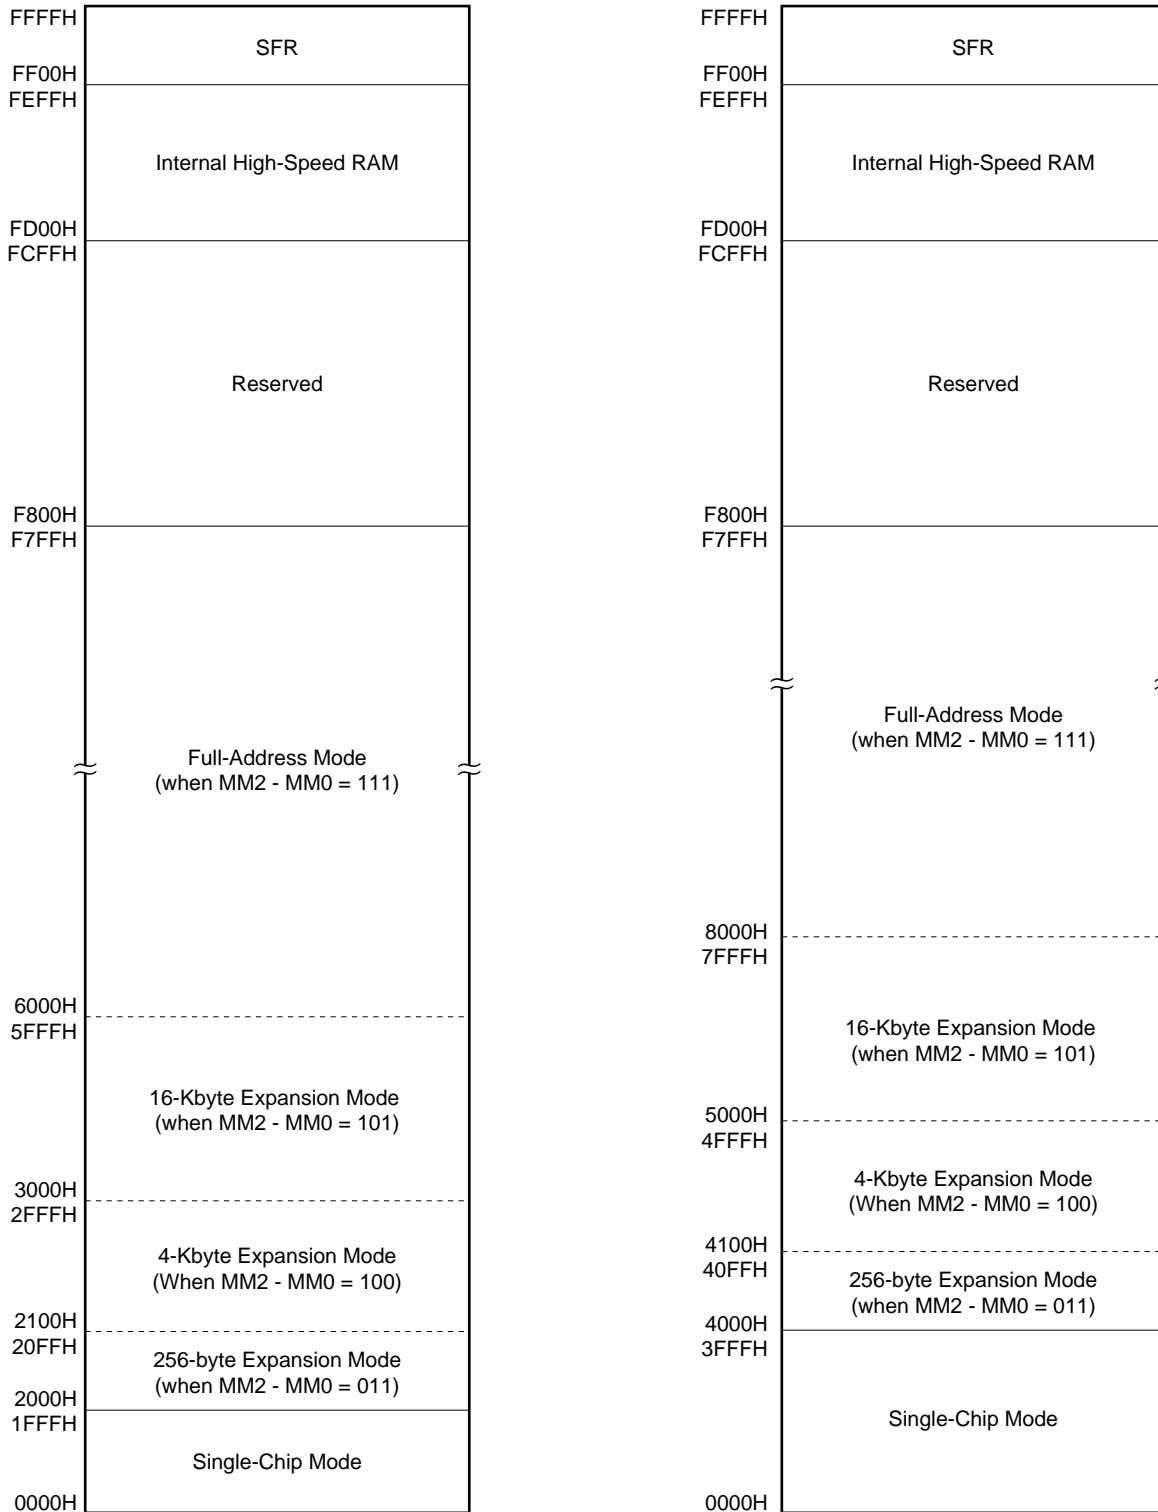


Figure 20-1. Memory Map When Using External Device Function (2/2)

(c) Memory map of μ PD780023A, 780033A, 780023AY, 780033AY and of μ PD78F0034A, 78F0034AY when internal ROM (flash memory) size is 24 KB

(d) Memory map of μ PD780024A, 780034A, 780024AY, 780034AY and of μ PD78F0034A, 78F0034AY when internal ROM (flash memory) size is 32 KB

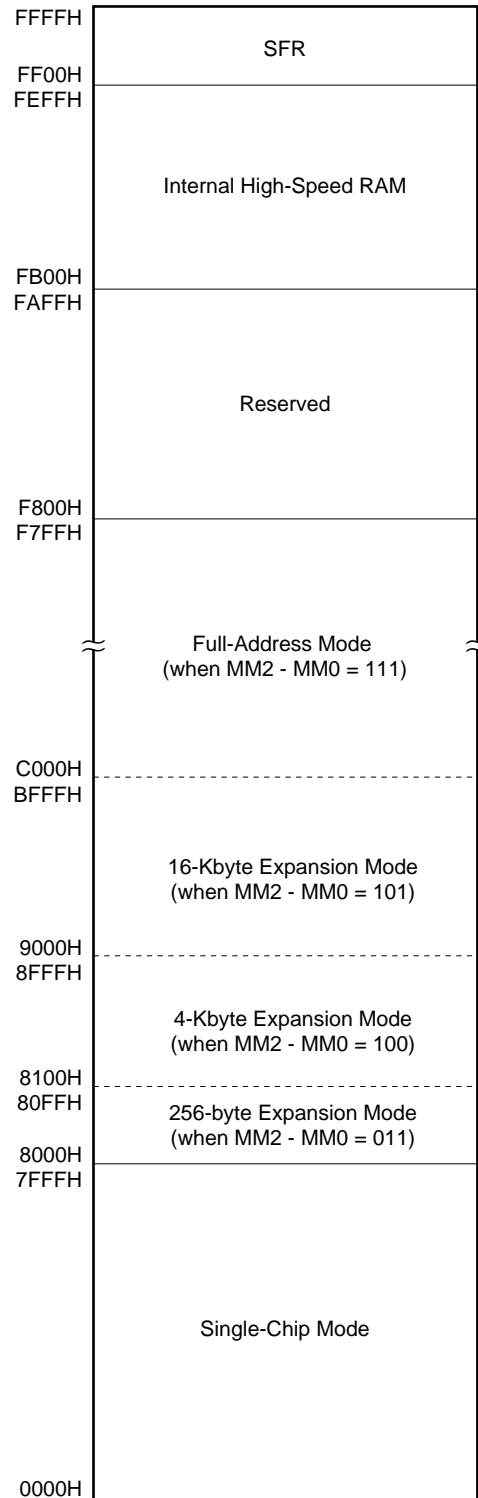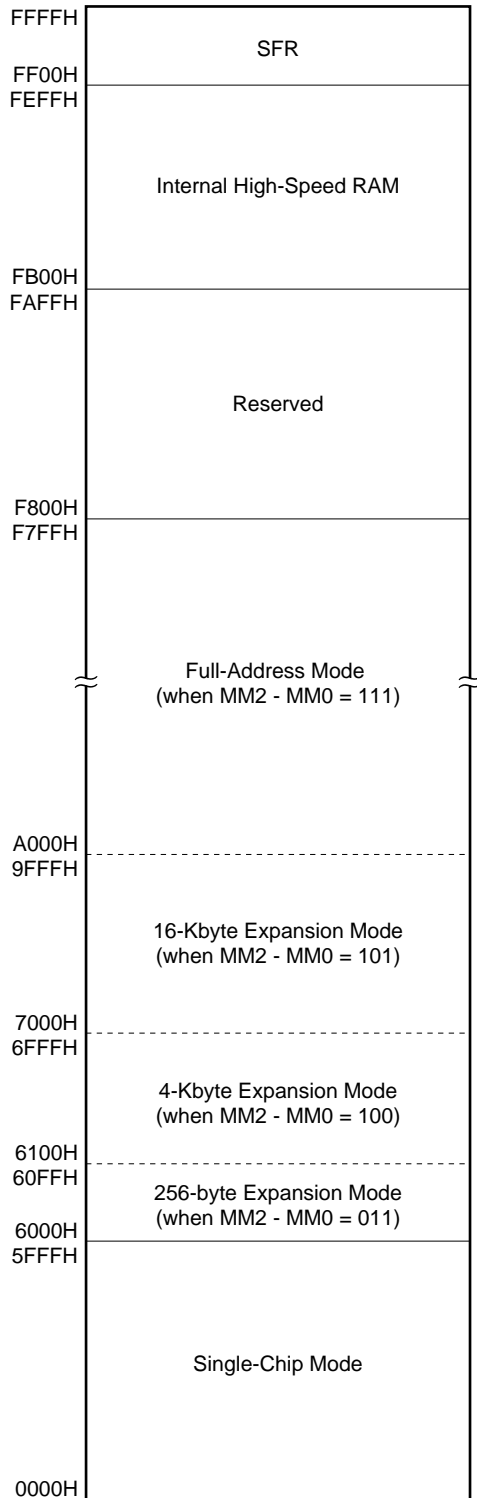

20.2 External Device Expansion Function Control Register

The external device expansion function is controlled by the following two types of registers.

- Memory expansion mode register (MEM)
- Memory expansion wait setting register (MM)

(1) Memory expansion mode register (MEM)

MEM sets the external expansion area.

MEM is set by a 1-bit or 8-bit memory manipulation instruction.

RESET input sets MEM to 00H.

Figure 20-2. Memory Expansion Mode Register (MEM) Format

Address: FF47H After Reset: 00H R/W

Symbol	7	6	5	4	3	2	1	0
MEM	0	0	0	0	0	MM2	MM1	MM0

MM2	MM1	MM0	Single-Chip/Memory Expansion Mode Selection		P40 to P47, P50 to P57, P64 to P67 Pin State					
					P40 to P47	P50 to P53	P54, P55	P56, P57	P64 to P67	
0	0	0	Single-chip mode		Port mode					
0	0	1	Port 4 falling edge detection mode		Port mode					
0	1	1	Memory expansion mode	256-byte mode	AD0 to AD7	Port mode		P64 = \overline{RD} P65 = \overline{WR}		
1	0	0		4-Kbyte mode		A8 to A11	Port mode		P66 = \overline{WAIT} P67 = ASTB	
1	0	1		16-Kbyte mode			A12, A13	Port mode		
1	1	1		Full-address mode ^{Note}				A14, A15		
Other than above			Setting prohibited							

Note The full-address mode allows external expansion to the entire 64-Kbyte address space except for the internal ROM, RAM, SFR areas and the reserved areas.

Caution When using the falling edge detection function of port 4, be sure to set MEM to 01H.

(2) Memory expansion wait setting register (MM)

MM sets the number of waits.

MM is set by a 1-bit or 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets MM to 10H.

Figure 20-3. Memory Expansion Wait Setting Register (MM) Format

Address: FFF8H After Reset: 10H R/W

Symbol	7	6	5	4	3	2	1	0
MM	0	0	PW1	PW0	0	0	0	0

PW1	PW0	Wait Control
0	0	No wait
0	1	Wait (one wait state inserted)
1	0	Setting prohibited
1	1	Wait control by external wait pin

Caution To control wait with external wait pin, be sure set WAIT/P66 pin to input mode (set bit 6 (PM66) of port mode register 6 (PM6) to 1).

20.3 External Device Expansion Function Timing

Timing control signal output pins in the external memory expansion mode are as follows.

(1) $\overline{\text{RD}}$ pin (Alternate function: P64)

Read strobe output pin. The read strobe output pin is output in data accesses and instruction fetches from external memory.

During internal memory access, the read strobe signal is not output (maintains high level).

(2) $\overline{\text{WR}}$ pin (Alternate function: P65)

Write strobe signal output pin. The write strobe signal is output in data access to external memory.

During internal memory access, the write strobe signal is not output (maintains high level)

(3) $\overline{\text{WAIT}}$ pin (Alternate function: P66)

External wait signal input pin.

When the external wait is not used, the $\overline{\text{WAIT}}$ pin can be used as an input/output port.

During internal memory access, the external wait signal is ignored.

(4) $\overline{\text{ASTB}}$ pin (Alternate function: P67)

Address strobe signal output pin. The address strobe signal is output regardless of data access and instruction fetch from external memory. During internal memory access, the address strobe signal is not output.

(5) AD0 to AD7, A8 to A15 pins (Alternate function: P40 to P47, P50 to P57)

Address/data signal output pins. Valid signal is output or input during data accesses and instruction fetches from external memory.

These signals change even during internal memory access (output values are undefined).

The timing charts are shown in Figures 20-4 to 20-7.

Figure 20-4. Instruction Fetch from External Memory



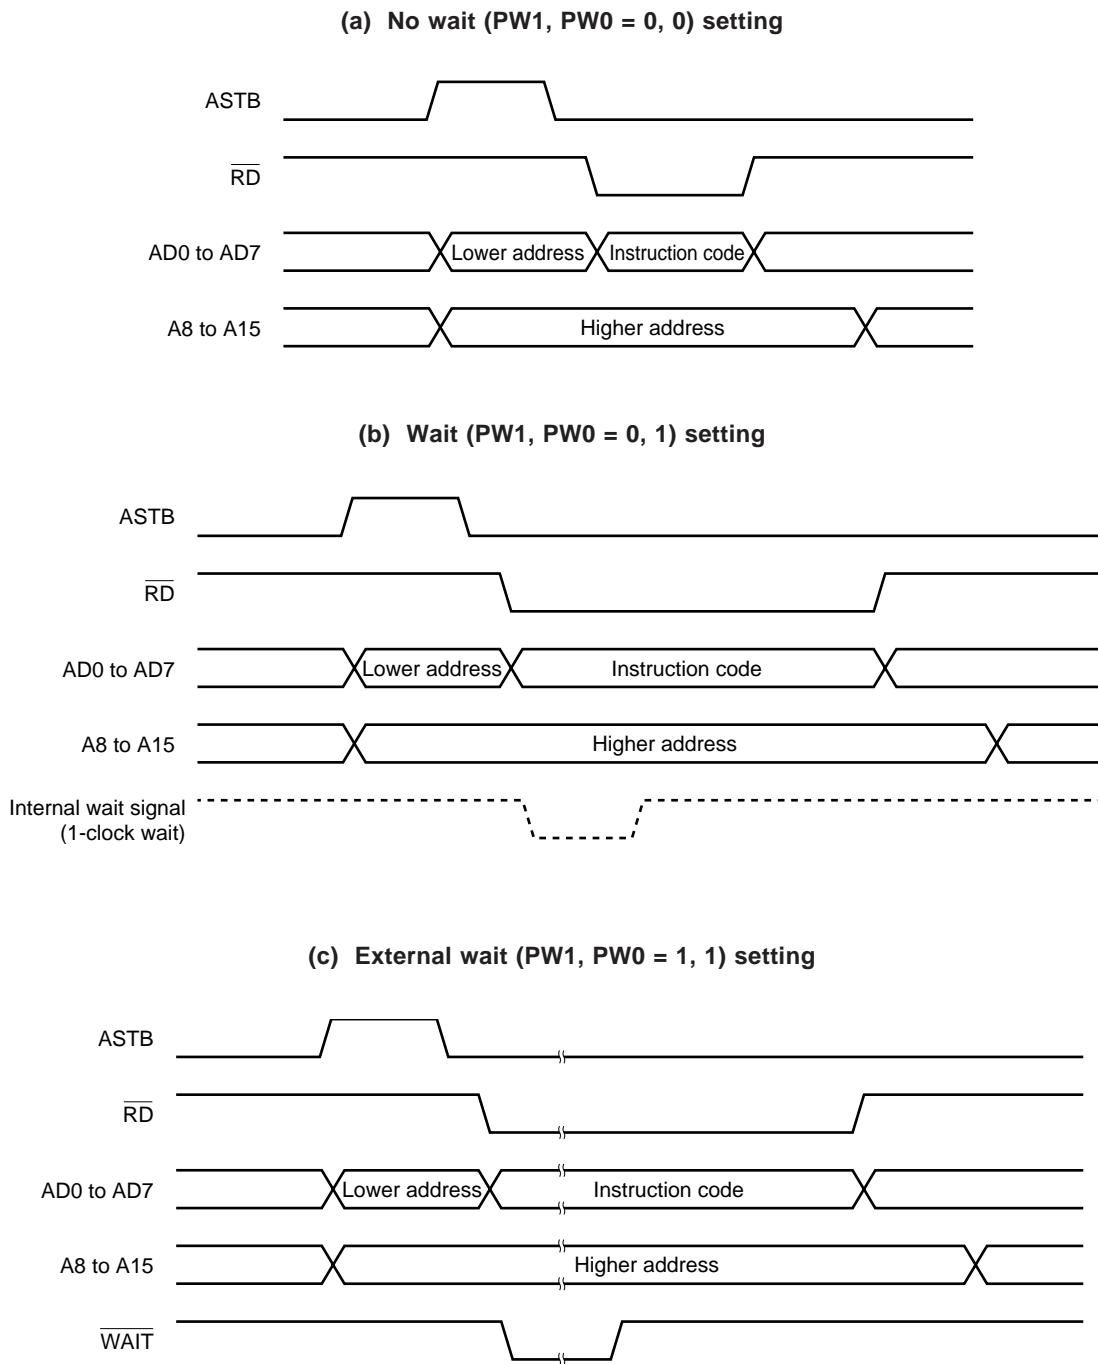


Figure 20-5. External Memory Read Timing

(a) No wait (PW1, PW0 = 0, 0) setting

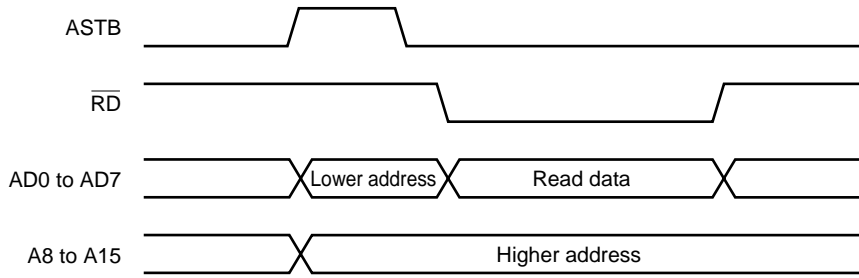

(b) Wait (PW1, PW0 = 0, 1) setting

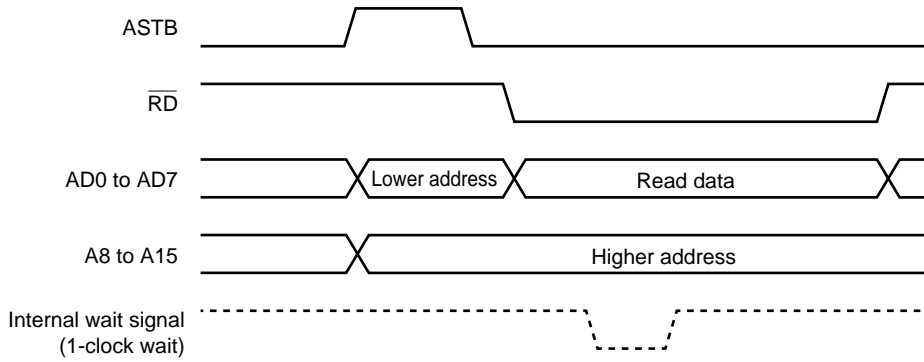

(c) External wait (PW1, PW0 = 1, 1) setting

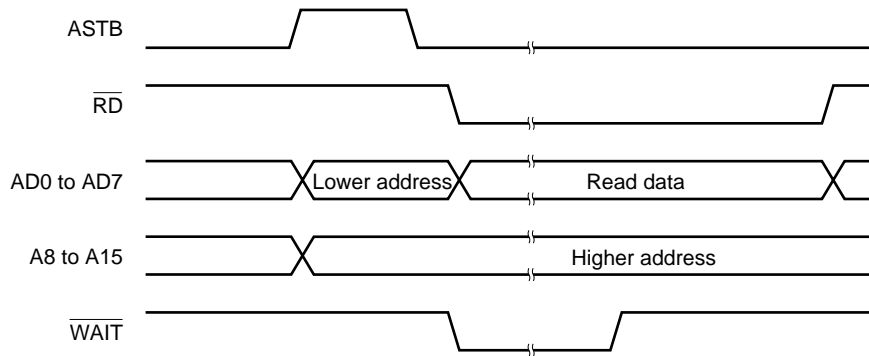


Figure 20-6. External Memory Write Timing


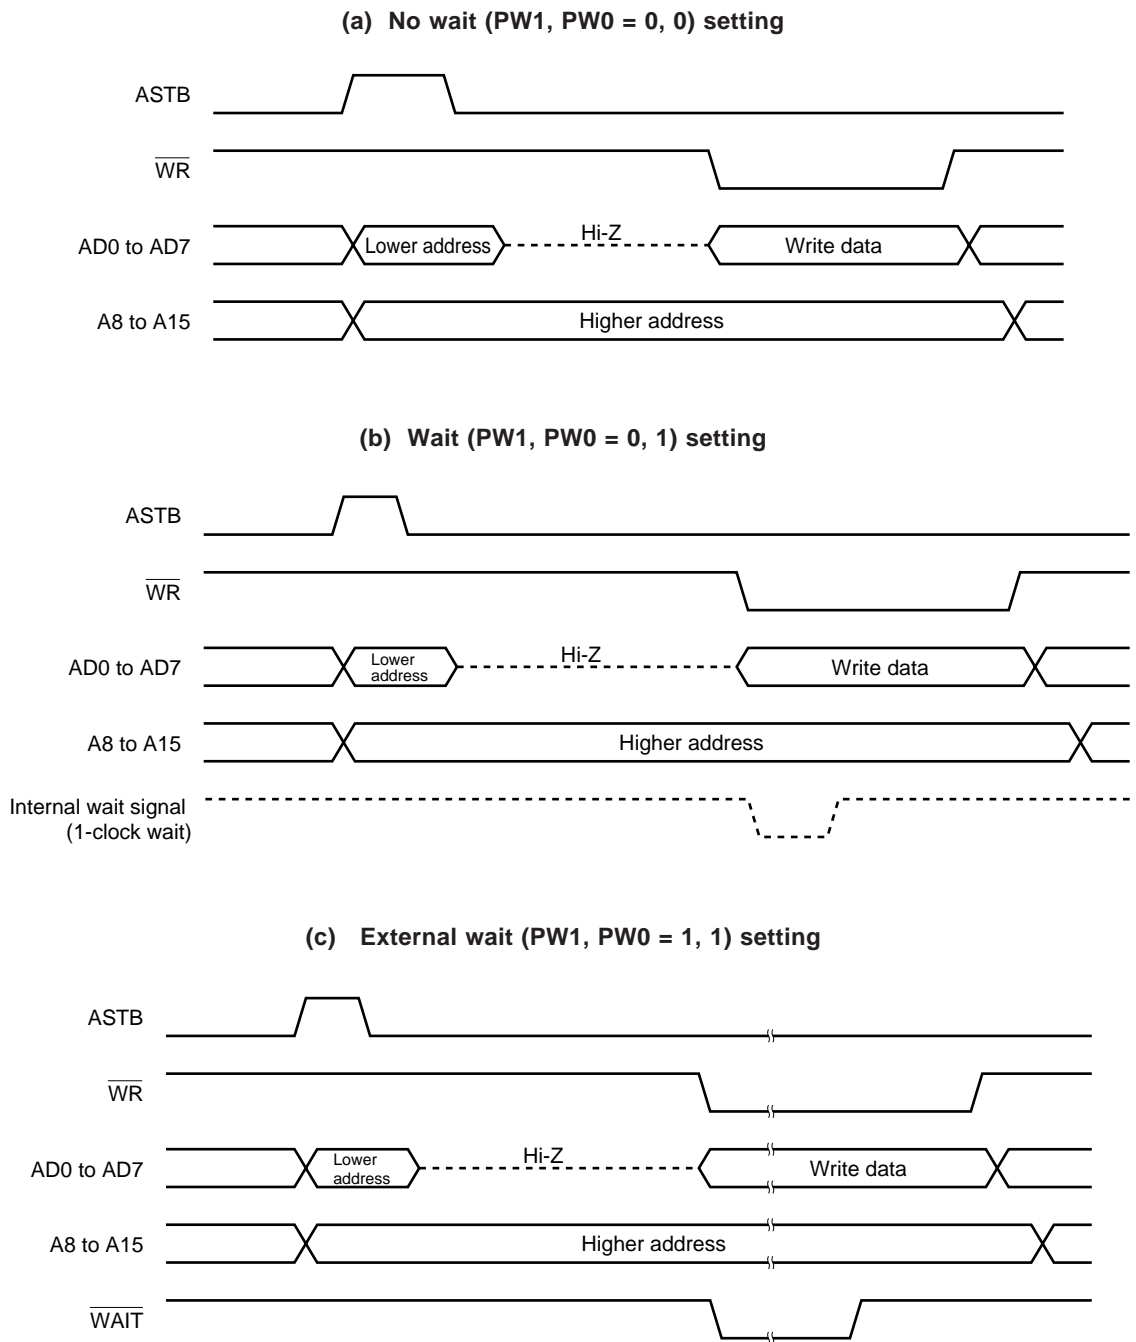


Figure 20-7. External Memory Read Modify Write Timing

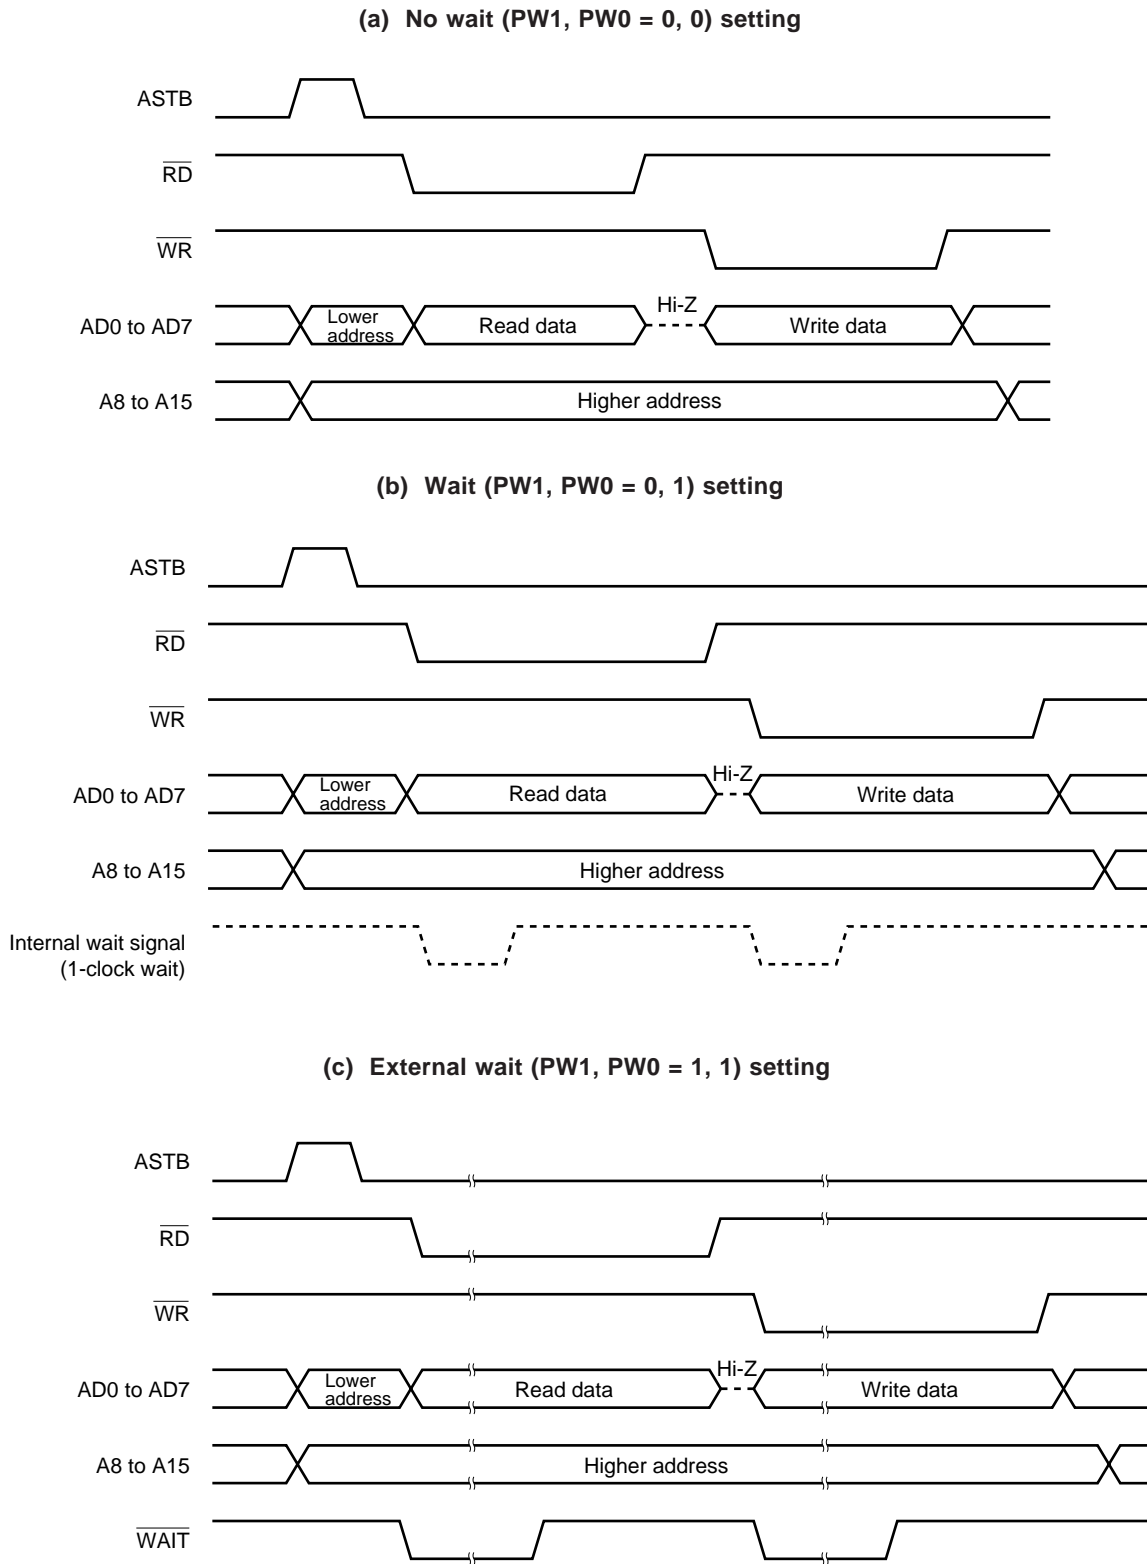

[MEMO]

21.1 Standby Function and Configuration

21.1.1 Standby function

The standby function is designed to decrease power consumption of the system. The following two modes are available.

(1) HALT mode

Halt instruction execution sets the HALT mode. The HALT mode is intended to stop the CPU operation clock. The system clock oscillator continues oscillating. In this mode, current consumption is not decreased as much as in the STOP mode. However, the HALT mode is effective to restart operation immediately upon interrupt request and to carry out intermittent operations such as watch applications.

(2) STOP mode

Stop instruction execution sets the STOP mode. In the STOP mode, the main system clock oscillator stops, stopping the whole system, thereby considerably reducing the CPU power consumption.

Data memory low-voltage hold (down to $V_{DD} = 1.6\text{ V}$) is possible. Thus, the STOP mode is effective to hold data memory contents with ultra-low current consumption. Because this mode can be cleared upon interrupt request, it enables intermittent operations to be carried out.

However, because a wait time is required to secure an oscillation stabilization time after the STOP mode is cleared, select the HALT mode if it is necessary to start processing immediately upon interrupt request.

In either of these two modes, all the contents of registers, flags and data memory just before the standby mode is set are held. The input/output port output latch and output buffer statuses are also held.

- Cautions**
- 1. The STOP mode can be used only when the system operates with the main system clock (subsystem clock oscillation cannot be stopped). The HALT mode can be used with either the main system clock or the subsystem clock.**
 - 2. When operation is transferred to the STOP mode, be sure to stop the peripheral hardware operation and execute the STOP instruction.**
 - 3. The following sequence is recommended for power consumption reduction of the A/D converter when the standby function is used: First clear bit 7 (ADCS0) of the A/D converter mode register 0 (ADM0) to 0 to stop the A/D conversion operation, and then execute the HALT or STOP instruction.**

21.1.2 Standby function control register

The wait time after the STOP mode is cleared upon interrupt request is controlled with the oscillation stabilization time select register (OSTS).

OSTS is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets OSTS to 04H.


Figure 21-1. Oscillation Stabilization Time Select Register (OSTS) Format

Address: FFFAH After Reset: 04H R/W

Symbol	7	6	5	4	3	2	1	0
OSTS	0	0	0	0	0	OSTS2	OSTS1	OSTS0

OSTS2	OSTS1	OSTS0	Selection of Oscillation Stabilization Time
0	0	0	$2^{12}/f_x$ (488 μ s)
0	0	1	$2^{14}/f_x$ (1.95 ms)
0	1	0	$2^{15}/f_x$ (3.91 ms)
0	1	1	$2^{16}/f_x$ (7.81 ms)
1	0	0	$2^{17}/f_x$ (15.6 ms)
Other than above			Setting prohibited

Caution The wait time after the STOP mode is cleared does not include the time (see "a" in the illustration below) from STOP mode clear to clock oscillation start. The time is not included either by $\overline{\text{RESET}}$ input or by interrupt request generation.

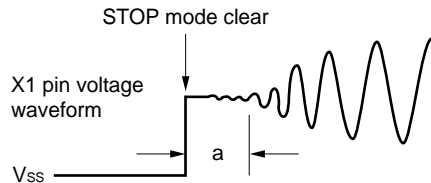

- Remarks**
1. f_x : Main system clock oscillation frequency
 2. Values in parentheses are for operation with $f_x = 8.38$ MHz.

21.2 Standby Function Operations

21.2.1 HALT mode

(1) HALT mode setting and operating statuses

The HALT mode is set by executing the HALT instruction. It can be set with the main system clock or the subsystem clock.

The operating statuses in the HALT mode are described below.

Table 21-1. HALT Mode Operating Statuses

Item	During HALT Instruction Execution Using Main System Clock		During HALT Instruction Execution Using Subsystem Clock	
	Without subsystem clock ^{Note 1}	With subsystem clock ^{Note 2}	With main system clock oscillation	With main system clock oscillation stopped
Clock generator	Both main system clock and subsystem clock can be oscillated. Clock supply to CPU stops.			
CPU	Operation stops.			
Port (Output latch)	Status before HALT mode setting is held.			
16-bit timer/event counter	Operable			Operable when TI00 is selected.
8-bit timer/event counter	Operable			Operable when TI50, TI51 are selected as count clock.
Watch timer	Operable when $f_x/2^7$ is selected as count clock	Operable		Operable when f_{XT} is selected as count clock.
Watchdog timer	Operable		Operation stops.	
A/D converter	Stop			
Serial interface	Operable			Operable during external SCK.
External interrupt	Operable			
Bus line during external expansion	AD0 to AD7	High impedance		
	A8 to A15	Status before HALT mode setting is held.		
	ASTB	Low level		
	\overline{WR} , \overline{RD}	High level		
	\overline{WAIT}	High impedance		

- Notes**
1. Including case when external clock is not supplied.
 2. Including case when external clock is supplied.


(2) HALT mode release

The HALT mode can be released with the following three types of sources.

(a) Release by unmasked interrupt request

When an unmasked interrupt request is generated, the HALT mode is released. If interrupt acknowledge is enabled, vectored interrupt service is carried out. If interrupt acknowledge is disabled, the next address instruction is executed.

Figure 21-2. HALT Mode Release by Interrupt Request Generation

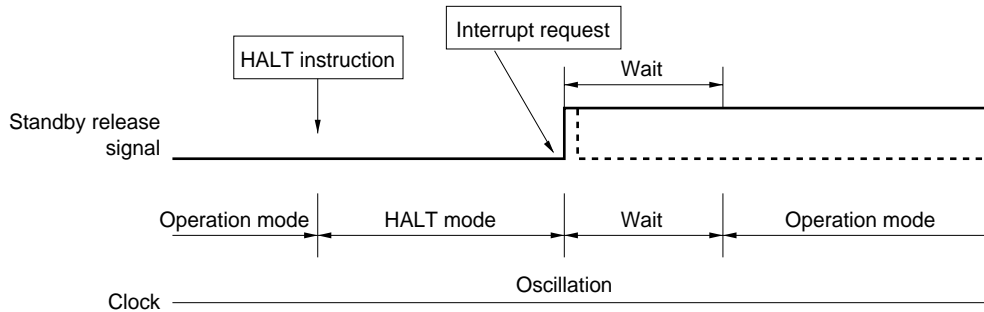

Remarks 1. The broken line indicates the case when the interrupt request which has released the standby mode is acknowledged.

2. Wait times are as follows:

- When vectored interrupt service is carried out : 8 or 9 clocks
- When vectored interrupt service is not carried out : 2 or 3 clocks


(b) Release by non-maskable interrupt request

When an non-maskable interrupt request is generated, the HALT mode is released and vectored interrupt service is carried out whether interrupt acknowledge is enabled or disabled.

(c) Release by $\overline{\text{RESET}}$ input

When $\overline{\text{RESET}}$ signal is input, HALT mode is released. And, as in the case with normal reset operation, a program is executed after branch to the reset vector address.

Figure 21-3. HALT Mode Release by $\overline{\text{RESET}}$ Input

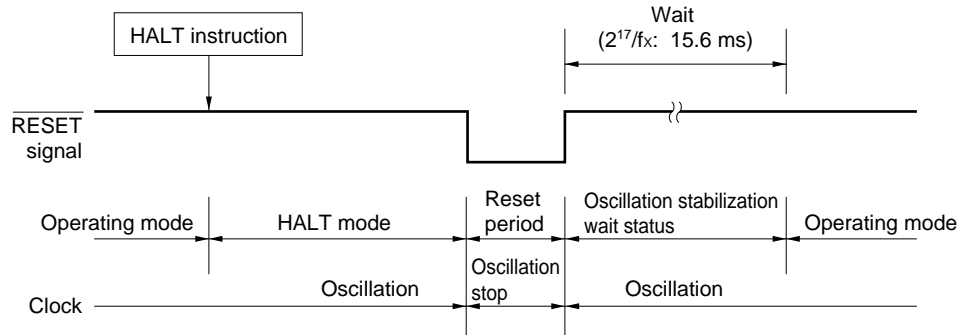

- Remarks 1. fx: Main system clock oscillation frequency
- 2. Values in parentheses are for operation with fx = 8.38 MHz.

Table 21-2. Operation after HALT Mode Release

Release Source	MK _{xx}	PR _{xx}	IE	ISP	Operation
Maskable interrupt request	0	0	0	×	Next address instruction execution
	0	0	1	×	Interrupt service execution
	0	1	0	1	Next address instruction execution
	0	1	×	0	
	0	1	1	1	Interrupt service execution
	1	×	×	×	HALT mode hold
Non-maskable interrupt request	—	—	×	×	Interrupt service execution
$\overline{\text{RESET}}$ input	—	—	×	×	Reset processing

×: Don't care

21.2.2 STOP mode

(1) STOP mode setting and operating status

The STOP mode is set by executing the STOP instruction. It can be set only with the main system clock.

- Cautions**
1. When the STOP mode is set, the X2 pin is internally connected to V_{DD1} via a pull-up resistor to minimize the leakage current at the crystal oscillator. Thus, do not use the STOP mode in a system where an external clock is used for the main system clock.
 2. Because the interrupt request signal is used to clear the standby mode, if there is an interrupt source with the interrupt request flag set and the interrupt mask flag reset, the standby mode is immediately cleared if set. Thus, the STOP mode is reset to the HALT mode immediately after execution of the STOP instruction. After the wait set using the oscillation stabilization time select register (OSTS), the operating mode is set.

The operating status in the STOP mode is described in Table 21-3 below.

Table 21-3. STOP Mode Operating Status

STOP Mode Setting		With Subsystem Clock	Without Subsystem Clock
		Item	
Clock generator		Only main system clock oscillation is stopped.	
CPU		Operation stops.	
Port (Output latch)		Status before STOP mode setting is held.	
16-bit timer/event counter		Operation stops.	
8-bit timer/event counter		Operable only when TI50, TI51 are selected as count clock.	
Watch timer		Operable when f _{XT} is selected as counter clock.	Operation stops.
Watchdog timer		Operation stops.	
Clock output/buzzer output		PCL and BUZ at low level.	
A/D converter		Operation stops	
Serial interface	Other than UART	Operable only when externally supplied clock is specified as the serial clock.	
	UART	Operation stops. (transmit shift register 0 (TXS0), receive shift register 0 (RX0), and receive buffer register 0 (RXB0) hold the value just before the clock stop.)	
External interrupt		Operatable	
Bus line during external expansion	AD0 to AD7	High impedance	
	A8 to A15	Status before STOP mode setting is held.	
	ASTB	Low level	
	\overline{WR} , \overline{RD}	High level	
	\overline{WAIT}	High impedance	


(2) STOP mode release

The STOP mode can be released by the following two types of sources.

(a) Release by unmasked interrupt request

When an unmasked interrupt request is generated, the STOP mode is released. If interrupt acknowledge is enabled after the lapse of oscillation stabilization time, vectored interrupt service is carried out. If interrupt acknowledge is disabled, the next address instruction is executed.

Figure 21-4. STOP Mode Release by Interrupt Request Generation

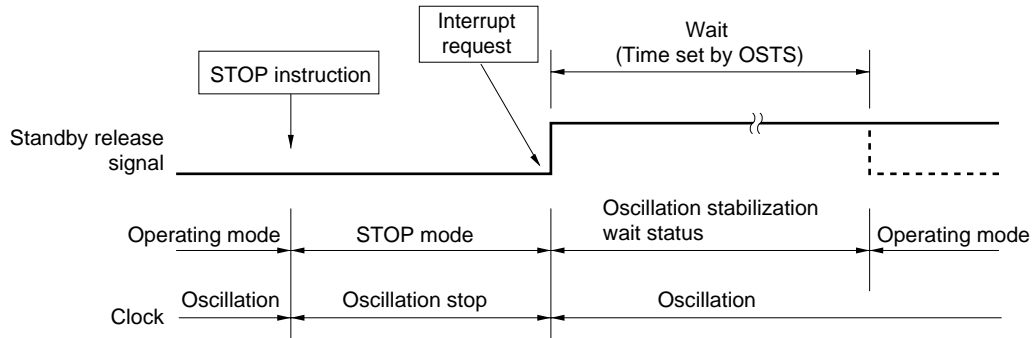


Remark The broken line indicates the case when the interrupt request which has cleared the standby status is acknowledged.

(b) Release by $\overline{\text{RESET}}$ input

The STOP mode is released when $\overline{\text{RESET}}$ signal is input, and after the lapse of oscillation stabilization time, reset operation is carried out.

Figure 21-5. STOP Mode Release by $\overline{\text{RESET}}$ Input

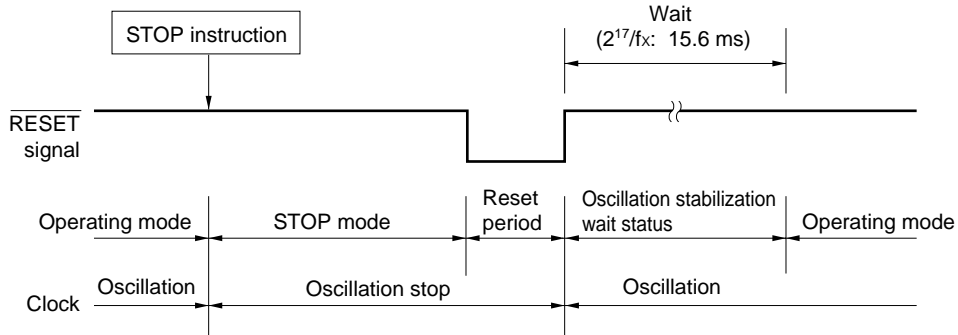

- Remarks 1.** f_x : Main system clock oscillation frequency
- 2.** Values in parentheses are for operation with $f_x = 8.38 \text{ MHz}$.

Table 21-4. Operation after STOP Mode Release

Release Source	MK $\times\times$	PR $\times\times$	IE	ISP	Operation
Maskable interrupt request	0	0	0	×	Next address instruction execution
	0	0	1	×	Interrupt service execution
	0	1	0	1	Next address instruction execution
	0	1	×	0	
	0	1	1	1	Interrupt service execution
	1	×	×	×	STOP mode hold
$\overline{\text{RESET}}$ input	—	—	×	×	Reset processing

×: Don't care

CHAPTER 22 RESET FUNCTION

22.1 Reset Function

The following two operations are available to generate the reset function.

- (1) External reset input via $\overline{\text{RESET}}$ pin
- (2) Internal reset by watchdog timer runaway time detection

External reset and internal reset have no functional differences. In both cases, program execution starts at the address at 0000H and 0001H by $\overline{\text{RESET}}$ input. When a low level is input to the $\overline{\text{RESET}}$ pin or the watchdog timer overflows, a reset is applied and each hardware is set to the status shown in Table 22-1. Each pin has high impedance during reset input or during oscillation stabilization time just after reset clear.

When a high level is input to the $\overline{\text{RESET}}$ pin, the reset is cleared and program execution starts after the lapse of oscillation stabilization time $2^{17}/f_x$. The reset applied by watchdog timer overflow is automatically cleared after a reset and program execution starts after the lapse of oscillation stabilization time $2^{17}/f_x$ (see **Figures 22-2 to 22-4**).

- Cautions**
1. For an external reset, input a low level for 10 μs or more to the $\overline{\text{RESET}}$ pin.
 2. During reset input, main system clock oscillation remains stopped but subsystem clock oscillation continues.
 3. When the STOP mode is cleared by reset, the STOP mode contents are held during reset input. However, the port pin becomes high-impedance.

Figure 22-1. Reset Function Block Diagram

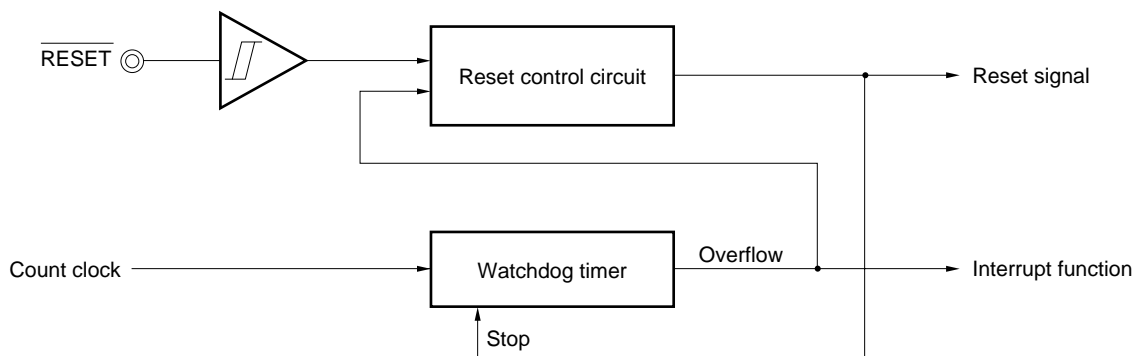


Figure 22-2. Timing of Reset by $\overline{\text{RESET}}$ Input

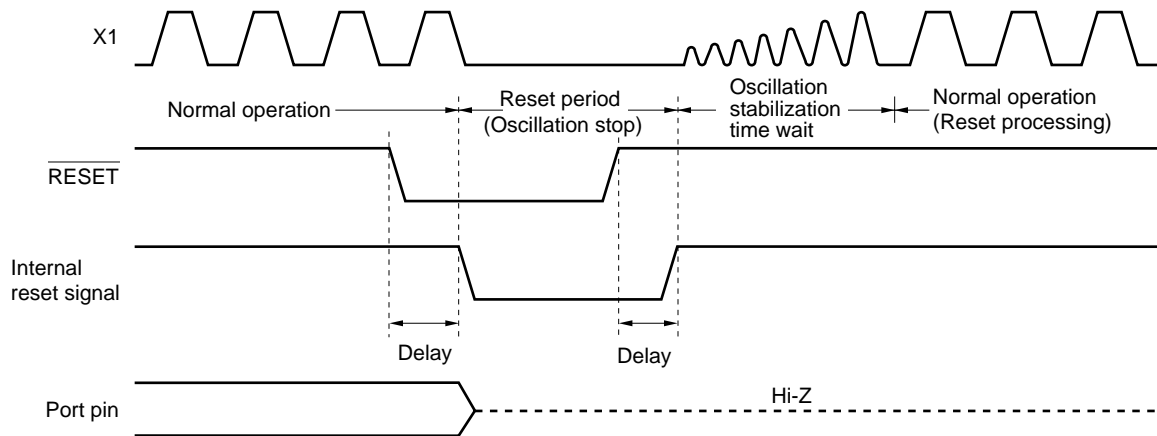


Figure 22-3. Timing of Reset Due to Watchdog Timer Overflow

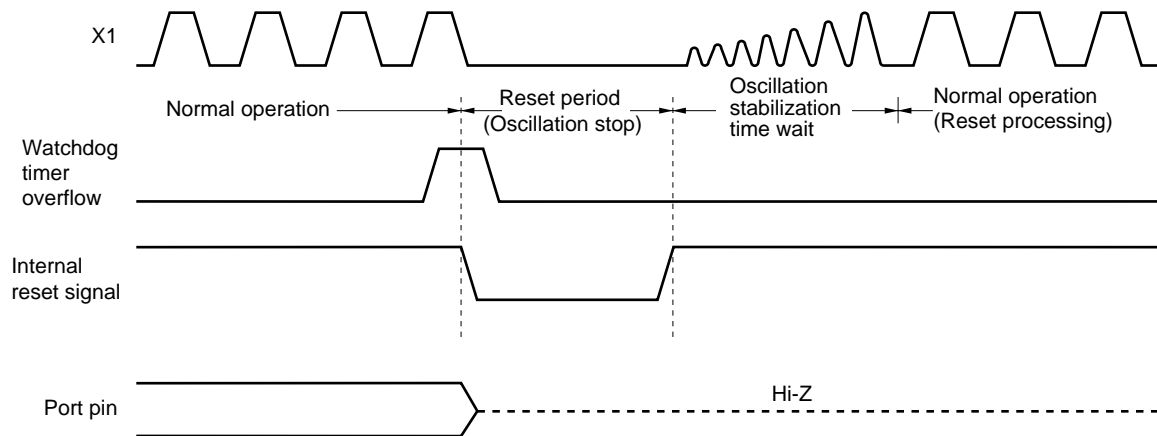


Figure 22-4. Timing of Reset in STOP Mode by $\overline{\text{RESET}}$ Input

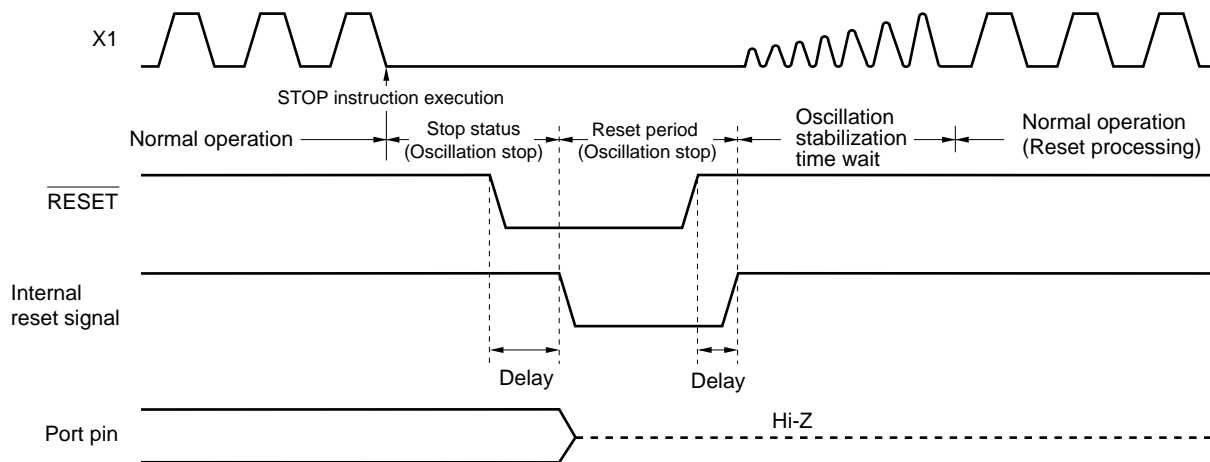


Table 22-1. Hardware Statuses after Reset (1/2)

Hardware		Status after Reset
Program counter (PC) ^{Note 1}		Contents of reset vector table (0000H, 0001H) are set.
Stack pointer (SP)		Undefined
Program status word (PSW)		02H
RAM	Data memory	Undefined ^{Note 2}
	General register	Undefined ^{Note 2}
Port (Output latch)		00H
Port mode registers (PM0, PM2 to PM7)		FFH
Pull-up resistor option registers (PU0, PU2 to PU7)		00H
Processor clock control register (PCC)		04H
Memory size switching register (IMS)		CFH ^{Note 3}
Memory expansion mode register (MEM)		00H
Memory expansion wait setting register (MM)		10H
Oscillation stabilization time select register (OSTS)		04H
16-bit timer/event counter	Timer/counter (TM0)	0000H
	Capture/compare register (CR00, CR01)	Undefined
	Prescaler mode register (PRM0)	00H
	Mode control register (TMC0)	00H
	Output control register (TOC0)	00H
8-bit timer/event counter	Timer/counters (TM50, TM51)	00H
	Compare registers (CR50, CR51)	Undefined
	Clock selection registers (TCL50, TCL51)	00H
	Mode control register (TMC50, TMC51)	00H
Watch timer	Operation mode register (WTM)	00H
Watchdog timer	Clock selection register (WDCS)	00H
	Mode register (WDTM)	00H

- Notes**
1. During reset input or oscillation stabilization time wait, only the PC contents among the hardware statuses become undefined. All other hardware statuses remain unchanged after reset.
 2. When a reset is executed in the standby mode, the pre-reset status is held even after reset.
 3. Although the initial value is CFH, use the following value to be set for each version.
 μ PD780021A, 780021AY, 780031A, 780031AY : 42H
 μ PD780022A, 780022AY, 780032A, 780032AY : 44H
 μ PD780023A, 780023AY, 780033A, 780033AY : C6H
 μ PD780024A, 780024AY, 780034A, 780034AY : C8H
 μ PD78F0034A, 78F0034AY : Value for mask ROM versions

Table 22-1. Hardware Statuses after Reset (2/2)

Hardware		Status after Reset
Clock output/buzzer output controller	Clock output select register (CKS)	00H
A/D converter	Conversion result registers (ADCR0)	00H
	Mode register (ADM0)	00H
	Analog input channel specification register (ADS0)	00H
Serial interface (UART0)	Asynchronous serial interface mode register (ASIM0)	00H
	Asynchronous serial interface status register (ASIS0)	00H
	Baud rate generator control register (BRGC0)	00H
	Transmit shift register (TXS0)	FFH
	Receive buffer register (RXB0)	
Serial interface (SIO3)	Shift registers (SIO30, SIO31 ^{Note 1})	Undefined
	Operating mode registers (CSIM30, CSIM31 ^{Note 1})	00H
Serial interface (IIC0) ^{Note 2}	Transfer clock selection register (IICCL0)	00H
	Shift register (IIC0)	00H
	Control register (IICCC0)	00H
	Status register (IICSS0)	00H
	Slave address register (SVA0)	00H
Interrupt	Request flag registers (IF0L, IF0H, IF1L)	00H
	Mask flag registers (MK0L, MK0H, MK1L)	FFH
	Priority specification flag registers (PR0L, PR0H, PR1L)	FFH
	External interrupt rising edge enable register (EGP)	00H
	External interrupt falling edge enable register (EGN)	00H

Notes 1. SIO31 and CSIM31 are provided only in the μ PD780024A, 780034A Subseries.

2. Provided only in the μ PD780024AY, 780034AY Subseries.

CHAPTER 23 μ PD78F0034A, 78F0034AY

The μ PD78F0034A and 78F0034AY are provided as the flash memory versions of the μ PD780024A, 780024AY, 780034A, 780034AY Subseries.

For purposes of simplification, throughout this chapter, the μ PD78F0034A is used to refer to both the μ PD78F0034A and 78F0034AY. In the same way, with regard to mask ROM versions, the μ PD78F0034A is used to refer to the μ PD780021A, 780022A, 780023A, 780024A and the μ PD780031A, 780032A, 780033A, 780034A, respectively.

The μ PD78F0034As replace the internal mask ROM of the μ PD780034A with flash memory to which a program can be written, deleted and overwritten while mounted on the substrate. Table 23-1 lists the differences among the μ PD78F0034A and the mask ROM versions.

Table 23-1. Differences among μ PD78F0034A and Mask ROM Versions

Item	μ PD78F0034A	Mask ROM Versions	
		μ PD780034A Subseries	μ PD780024A Subseries
Internal ROM configuration	Flash memory	Mask ROM	
Internal ROM capacity	32 Kbytes ^{Note 1}	μ PD780031A: 8 Kbytes μ PD780032A: 16 Kbytes μ PD780033A: 24 Kbytes μ PD780034A: 32 Kbytes	μ PD780021A: 8 Kbytes μ PD780022A: 16 Kbytes μ PD780023A: 24 Kbytes μ PD780024A: 32 Kbytes
Internal high-speed RAM capacity	1024 bytes ^{Note 1}	μ PD780031A: 512 bytes μ PD780032A: 512 bytes μ PD780033A: 1024 bytes μ PD780034A: 1024 bytes	μ PD780021A: 512 bytes μ PD780022A: 512 bytes μ PD780023A: 1024 bytes μ PD780024A: 1024 bytes
Resolution of A/D converter	10 bits		8 bits
Mask option to specify the on-chip pull-up resistors of pins P30 to P33 ^{Note 2}	Not possible	Possible	
IC pin	None	Available	
V _{PP} pin	Available	None	
Electrical specifications	Refer to data sheet of each product.		

Notes 1. The same capacity as the mask ROM versions can be specified by means of the memory size switching register (IMS).

2. P30 and P31 pins are provided only on the μ PD780024AY, 780034AY Subseries.

Caution Flash memory versions and mask ROM versions differ in their noise immunity and noise radiation. If replacing flash memory versions with mask ROM versions when changing from test production to mass production, be sure to perform sufficient evaluation with CS versions (not ES versions) of mask ROM versions.

23.1 Memory Size Switching Register

The μ PD78F0034A allows users to select the internal memory capacity using the memory size switching register (IMS) so that the same memory map as that of the μ PD780021A, 780022A, 780023A, 780024A and μ PD780031A, 780032A, 780033A, 780034A with a different size of internal memory capacity can be achieved.

IMS is set by an 8-bit memory manipulation instruction.

$\overline{\text{RESET}}$ input sets IMS to CFH.

Caution The initial value of IMS is “setting prohibited (CFH)”. Be sure to set the value of the relevant mask ROM versions at initialization.

Figure 23-1. Memory Size Switching Register (IMS) Format

Address: FFF0H After Reset: CFH R/W

Symbol	7	6	5	4	3	2	1	0
IMS	RAM2	RAM1	RAM0	0	ROM3	ROM2	ROM1	ROM0

RAM2	RAM1	RAM0	Internal High-Speed RAM Capacity Selection
0	1	0	512 bytes
1	1	0	1024 bytes
Other than above			Setting prohibited

ROM3	ROM2	ROM1	ROM0	Internal ROM Capacity Selection
0	0	1	0	8 Kbytes
0	1	0	0	16 Kbytes
0	1	1	0	24 Kbytes
1	0	0	0	32 Kbytes
1	1	1	1	60 Kbytes (setting prohibited)
Other than above				Setting prohibited

The IMS settings to obtain the same memory map as mask ROM versions are shown in Table 23-2.

Table 23-2. Memory Size Switching Register Settings

Target Mask ROM Versions	IMS Setting
μ PD780021A, 780031A	42H
μ PD780022A, 780032A	44H
μ PD780023A, 780033A	C6H
μ PD780024A, 780034A	C8H

Caution When using the mask ROM versions, be sure to set the value indicated in Table 23-2 to IMS.

23.2 Flash Memory Programming

On-board writing of flash memory (with device mounted on target system) is supported.

On-board writing is done after connecting a dedicated flash programmer (Flashpro II (part number: FL-PR2), Flashpro III (FL-PR3, PG-FP3)) to the host machine and target system.

Moreover, writing to flash memory can also be performed using a flash memory writing adapter connected to Flashpro II or Flashpro III.

Remark FL-PR2 and FL-PR3 are products of Naito Densai Machida Mfg. Co., Ltd.

23.2.1 Selection of transmission method


Writing to flash memory is performed using Flashpro II or Flashpro III and serial communication. Select the transmission method for writing from Table 23-3. For the selection of the transmission method, a format like the one shown in Figure 23-2 is used. The transmission methods are selected with the V_{PP} pulse numbers shown in Table 23-3.

Table 23-3. Transmission Method List

Transmission Method	Number of Channels	Pin Used	Number of V_{PP} Pulses
3-wire serial I/O	1	SI30/P20 SO30/P21 SCK30/P22	0
3-wire serial I/O (μ PD78F0034A only)	1	SI31/P34 SO31/P35 SCK31/P36	1
UART	1	RxD0/P23 TxD0/P24	8
I ² C bus (μ PD78F0034AY only)	1	SDA0/P32 SCL0/P33	4
Pseudo 3-wire serial I/O	1	P72/TI50/TO50 (Serial clock input) P71/TI01 (Serial data output) P70/TI00/TO0 (Serial data input)	12

- Cautions**
1. Be sure to select the number of V_{PP} pulses shown in Table 23-3 for the transmission method.
 2. If performing write operations to flash memory with the UART transmission method, set the main system clock oscillation frequency to 3 MHz or higher.
 3. When writing data to flash memory using the I²C bus communication method, the range of the usable main system clock oscillation frequency is $4.19 \text{ MHz} \leq f_x \leq 8.38 \text{ MHz}$.

Figure 23-2. Transmission Method Selection Format

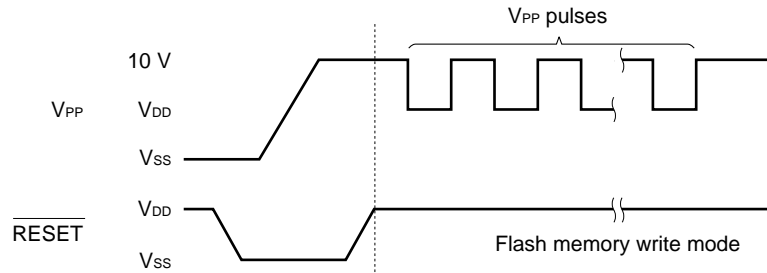

23.2.2 Flash memory programming function

Flash memory writing is performed through command and data transmit/receive operations using the selected transmission method. The main functions are listed in Table 23-4.

Table 23-4. Main Functions of Flash Memory Programming

Function	Description
Reset	Used to detect write stop and transmission synchronization.
Batch verify	Compares entire memory contents and input data.
Batch delete	Deletes the entire memory contents.
Batch blank check	Checks the deletion status of the entire memory.
High-speed write	Performs writing to flash memory according to write start address and number of write data (bytes).
Continuous write	Performs successive write operations using the data input with high-speed write operation.
Status	Checks the current operation mode and operation end.
Oscillation frequency setting	Inputs the resonator oscillation frequency information.
Delete time setting	Inputs the memory delete time.
Baud rate setting	Sets the transmission rate when the UART method is used.
I ² C mode setting	Sets the standard/high-speed mode when the I ² C bus method is used.
Silicon signature read	Outputs the device name, memory capacity, and device block information.

23.2.3 Connection of Flashpro II and Flashpro III

Connection of the Flashpro II and the μ PD78F0034A differs depending on communication method (3-wire serial I/O, UART, and I²C bus). Each type of connection is shown in Figures 23-3, 23-4, and 23-5.

Figure 23-3. Connection of Flashpro II and Flashpro III Using 3-Wire Serial I/O Method

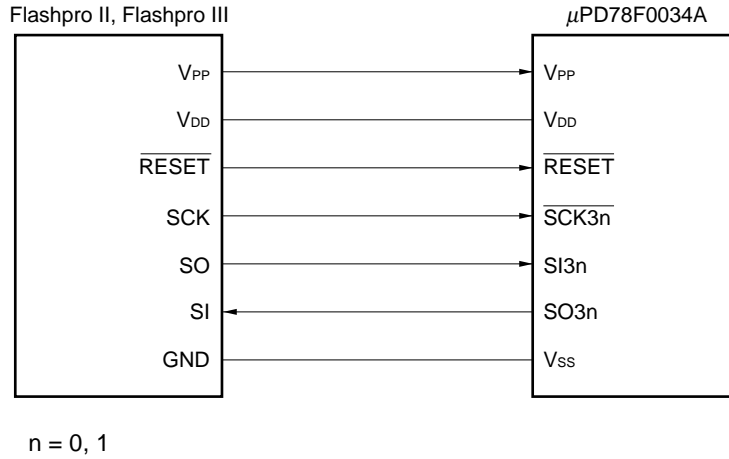


Figure 23-4. Connection of Flashpro II and Flashpro III Using UART Method

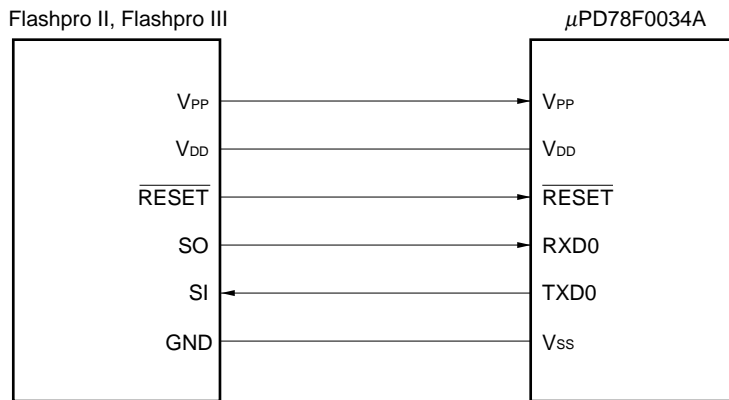


Figure 23-5. Connection of Flashpro II and Flashpro III Using I²C Bus Method


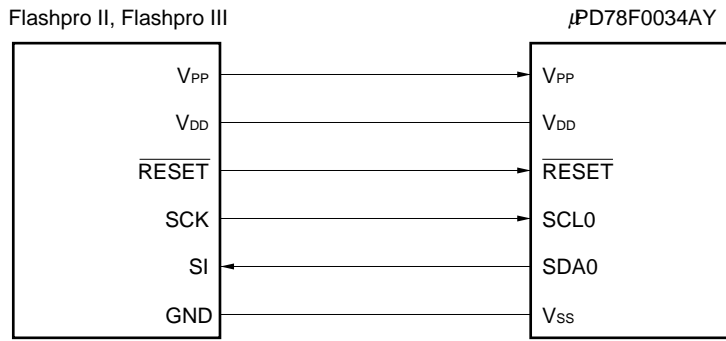


Figure 23-6. Connection of Flashpro II and Flashpro III Using Pseudo 3-wire Serial I/O

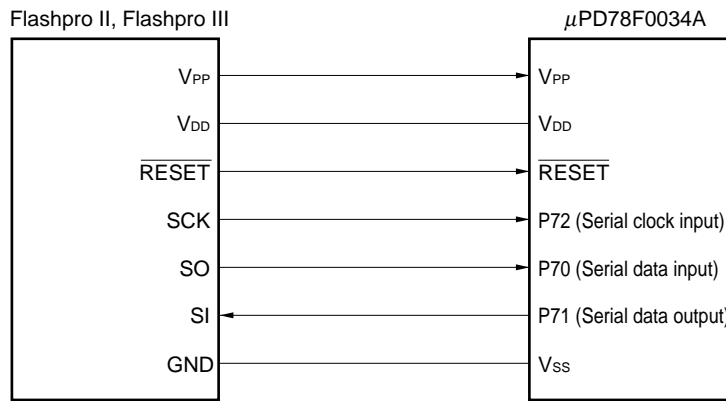

CHAPTER 24 INSTRUCTION SET

This chapter lists each instruction set of the μ PD780024A, 780034A, 780024AY, 780034AY Subseries in table form. For details of its operation and operation code, refer to the separate document **78K/0 Series User's Manual—Instructions (U12326E)**.

24.1 Legends Used in Operation List

24.1.1 Operand identifiers and specification methods

Operands are written in “Operand” column of each instruction in accordance with the specification method of the instruction operand identifier (refer to the assembler specifications for detail). When there are two or more methods, select one of them. Alphabetic letters in capitals and symbols, #, !, \$ and [] are key words and must be written as they are. Each symbol has the following meaning.

- # : Immediate data specification
- ! : Absolute address specification
- \$: Relative address specification
- [] : Indirect address specification

In the case of immediate data, describe an appropriate numeric value or a label. When using a label, be sure to write the #, !, \$, and [] symbols.

For operand register identifiers, r and rp, either function names (X, A, C, etc.) or absolute names (names in parentheses in the table below, R0, R1, R2, etc.) can be used for specification.

Table 24-1. Operand Identifiers and Specification Methods

Identifier	Specification Method
r	X (R0), A (R1), C (R2), B (R3), E (R4), D (R5), L (R6), H (R7),
rp	AX (RP0), BC (RP1), DE (RP2), HL (RP3)
sfr	Special function register symbol ^{Note}
sfrp	Special function register symbol (16-bit manipulatable register even addresses only) ^{Note}
saddr	FE20H to FF1FH Immediate data or labels
saddrp	FE20H to FF1FH Immediate data or labels (even address only)
addr16	0000H to FFFFH Immediate data or labels (Only even addresses for 16-bit data transfer instructions)
addr11	0800H to 0FFFH Immediate data or labels
addr5	0040H to 007FH Immediate data or labels (even address only)
word	16-bit immediate data or label
byte	8-bit immediate data or label
bit	3-bit immediate data or label
RBn	RB0 to RB3

Note Addresses from FFD0H to FFDFH cannot be accessed with these operands.

Remark For special function register symbols, refer to **Table 5-5 Special Function Register List**.

24.1.2 Description of “operation” column

A	: A register; 8-bit accumulator
X	: X register
B	: B register
C	: C register
D	: D register
E	: E register
H	: H register
L	: L register
AX	: AX register pair; 16-bit accumulator
BC	: BC register pair
DE	: DE register pair
HL	: HL register pair
PC	: Program counter
SP	: Stack pointer
PSW	: Program status word
CY	: Carry flag
AC	: Auxiliary carry flag
Z	: Zero flag
RBS	: Register bank select flag
IE	: Interrupt request enable flag
NMIS	: Non-maskable interrupt servicing flag
()	: Memory contents indicated by address or register contents in parentheses
X _H , X _L	: High-order 8 bits and low-order 8 bits of 16-bit register
∧	: Logical product (AND)
∨	: Logical sum (OR)
⊕	: Exclusive logical sum (exclusive OR)
—	: Inverted data
addr16	: 16-bit immediate data or label
jdisp8	: Signed 8-bit data (displacement value)

24.1.3 Description of “flag operation” column

(Blank)	: Not affected
0	: Cleared to 0
1	: Set to 1
×	: Set/cleared according to the result
R	: Previously saved value is restored

24.2 Operation List

Instruction Group	Mnemonic	Operands	Byte	Clock		Operation	Flag			
				Note 1	Note 2		Z	AC	CY	
8-bit data transfer	MOV	r, #byte	2	4	–	r ← byte				
		saddr, #byte	3	6	7	(saddr) ← byte				
		sfr, #byte	3	–	7	sfr ← byte				
		A, r	Note 3	1	2	–	A ← r			
		r, A	Note 3	1	2	–	r ← A			
		A, saddr		2	4	5	A ← (saddr)			
		saddr, A		2	4	5	(saddr) ← A			
		A, sfr		2	–	5	A ← sfr			
		sfr, A		2	–	5	sfr ← A			
		A, !addr16		3	8	9 + n	A ← (addr16)			
		!addr16, A		3	8	9 + m	(addr16) ← A			
		PSW, #byte		3	–	7	PSW ← byte	x	x	x
		A, PSW		2	–	5	A ← PSW			
		PSW, A		2	–	5	PSW ← A	x	x	x
		A, [DE]		1	4	5 + n	A ← (DE)			
		[DE], A		1	4	5 + m	(DE) ← A			
		A, [HL]		1	4	5 + n	A ← (HL)			
		[HL], A		1	4	5 + m	(HL) ← A			
		A, [HL + byte]		2	8	9 + n	A ← (HL + byte)			
		[HL + byte], A		2	8	9 + m	(HL + byte) ← A			
	A, [HL + B]		1	6	7 + n	A ← (HL + B)				
	[HL + B], A		1	6	7 + m	(HL + B) ← A				
	A, [HL + C]		1	6	7 + n	A ← (HL + C)				
	[HL + C], A		1	6	7 + m	(HL + C) ← A				
	XCH	A, r	Note 3	1	2	–	A ↔ r			
		A, saddr		2	4	6	A ↔ (saddr)			
		A, sfr		2	–	6	A ↔ (sfr)			
		A, !addr16		3	8	10 + n + m	A ↔ (addr16)			
A, [DE]			1	4	6 + n + m	A ↔ (DE)				
A, [HL]			1	4	6 + n + m	A ↔ (HL)				
A, [HL + byte]			2	8	10 + n + m	A ↔ (HL + byte)				
A, [HL + B]			2	8	10 + n + m	A ↔ (HL + B)				
A, [HL + C]			2	8	10 + n + m	A ↔ (HL + C)				

- Notes**
1. When the internal high-speed RAM area is accessed or instruction with no data access
 2. When an area except the internal high-speed RAM area is accessed.
 3. Except “r = A”

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f_{cpu}) selected by the processor clock control register (PCC).
 2. This clock cycle applies to internal ROM program.
 3. n is the number of waits when external memory expansion area is read from.
 4. m is the number of waits when external memory expansion area is written to.

Instruction Group	Mnemonic	Operands	Byte	Clock		Operation	Flag			
				Note 1	Note 2		Z	AC	CY	
16-bit data transfer	MOVW	rp, #word	3	6	–	rp ← word				
		saddrp, #word	4	8	10	(saddrp) ← word				
		sfrp, #word	4	–	10	sfrp ← word				
		AX, saddrp	2	6	8	AX ← (saddrp)				
		saddrp, AX	2	6	8	(saddrp) ← AX				
		AX, sfrp	2	–	8	AX ← sfrp				
		sfrp, AX	2	–	8	sfrp ← AX				
		AX, rp	Note 3	1	4	–	AX ← rp			
		rp, AX	Note 3	1	4	–	rp ← AX			
		AX, !addr16		3	10	12 + 2n	AX ← (addr16)			
	!addr16, AX		3	10	12 + 2m	(addr16) ← AX				
XCHW	AX, rp	Note 3	1	4	–	AX ↔ rp				
8-bit operation	ADD	A, #byte	2	4	–	A, CY ← A + byte	×	×	×	
		saddr, #byte	3	6	8	(saddr), CY ← (saddr) + byte	×	×	×	
		A, r	Note 4	2	4	–	A, CY ← A + r	×	×	×
		r, A		2	4	–	r, CY ← r + A	×	×	×
		A, saddr		2	4	5	A, CY ← A + (saddr)	×	×	×
		A, !addr16		3	8	9 + n	A, CY ← A + (addr16)	×	×	×
		A, [HL]		1	4	5 + n	A, CY ← A + (HL)	×	×	×
		A, [HL + byte]		2	8	9 + n	A, CY ← A + (HL + byte)	×	×	×
		A, [HL + B]		2	8	9 + n	A, CY ← A + (HL + B)	×	×	×
		A, [HL + C]		2	8	9 + n	A, CY ← A + (HL + C)	×	×	×
		ADDC	A, #byte		2	4	–	A, CY ← A + byte + CY	×	×
	saddr, #byte			3	6	8	(saddr), CY ← (saddr) + byte + CY	×	×	×
	A, r		Note 4	2	4	–	A, CY ← A + r + CY	×	×	×
	r, A			2	4	–	r, CY ← r + A + CY	×	×	×
	A, saddr			2	4	5	A, CY ← A + (saddr) + CY	×	×	×
	A, !addr16			3	8	9 + n	A, CY ← A + (addr16) + CY	×	×	×
	A, [HL]			1	4	5 + n	A, CY ← A + (HL) + CY	×	×	×
	A, [HL + byte]			2	8	9 + n	A, CY ← A + (HL + byte) + CY	×	×	×

- Notes**
1. When the internal high-speed RAM area is accessed or instruction with no data access
 2. When an area except the internal high-speed RAM area is accessed
 3. Only when rp = BC, DE or HL
 4. Except “r = A”

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f_{CPU}) selected by the processor clock control register (PCC).
 2. This clock cycle applies to internal ROM program.
 3. n is the number of waits when external memory expansion area is read from.
 4. m is the number of waits when external memory expansion area is written to.

Instruction Group	Mnemonic	Operands	Byte	Clock		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
8-bit operation	SUB	A, #byte	2	4	–	A, CY ← A – byte	×	×	×
		saddr, #byte	3	6	8	(saddr), CY ← (saddr) – byte	×	×	×
		A, r Note 3	2	4	–	A, CY ← A – r	×	×	×
		r, A	2	4	–	r, CY ← r – A	×	×	×
		A, saddr	2	4	5	A, CY ← A – (saddr)	×	×	×
		A, !addr16	3	8	9 + n	A, CY ← A – (addr16)	×	×	×
		A, [HL]	1	4	5 + n	A, CY ← A – (HL)	×	×	×
		A, [HL + byte]	2	8	9 + n	A, CY ← A – (HL + byte)	×	×	×
		A, [HL + B]	2	8	9 + n	A, CY ← A – (HL + B)	×	×	×
		A, [HL + C]	2	8	9 + n	A, CY ← A – (HL + C)	×	×	×
	SUBC	A, #byte	2	4	–	A, CY ← A – byte – CY	×	×	×
		saddr, #byte	3	6	8	(saddr), CY ← (saddr) – byte – CY	×	×	×
		A, r Note 3	2	4	–	A, CY ← A – r – CY	×	×	×
		r, A	2	4	–	r, CY ← r – A – CY	×	×	×
		A, saddr	2	4	5	A, CY ← A – (saddr) – CY	×	×	×
		A, !addr16	3	8	9 + n	A, CY ← A – (addr16) – CY	×	×	×
		A, [HL]	1	4	5 + n	A, CY ← A – (HL) – CY	×	×	×
		A, [HL + byte]	2	8	9 + n	A, CY ← A – (HL + byte) – CY	×	×	×
		A, [HL + B]	2	8	9 + n	A, CY ← A – (HL + B) – CY	×	×	×
		A, [HL + C]	2	8	9 + n	A, CY ← A – (HL + C) – CY	×	×	×
	AND	A, #byte	2	4	–	A ← A ∧ byte	×		
		saddr, #byte	3	6	8	(saddr) ← (saddr) ∧ byte	×		
		A, r Note 3	2	4	–	A ← A ∧ r	×		
		r, A	2	4	–	r ← r ∧ A	×		
		A, saddr	2	4	5	A ← A ∧ (saddr)	×		
		A, !addr16	3	8	9 + n	A ← A ∧ (addr16)	×		
		A, [HL]	1	4	5 + n	A ← A ∧ [HL]	×		
		A, [HL + byte]	2	8	9 + n	A ← A ∧ [HL + byte]	×		
		A, [HL + B]	2	8	9 + n	A ← A ∧ [HL + B]	×		
		A, [HL + C]	2	8	9 + n	A ← A ∧ [HL + C]	×		

- Notes**
1. When the internal high-speed RAM area is accessed or instruction with no data access
 2. When an area except the internal high-speed RAM area is accessed
 3. Except “r = A”

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f_{cpu}) selected by the processor clock control register (PCC).
 2. This clock cycle applies to internal ROM program.
 3. n is the number of waits when external memory expansion area is read from.

Instruction Group	Mnemonic	Operands	Byte	Clock		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
8-bit operation	OR	A, #byte	2	4	–	$A \leftarrow A \vee \text{byte}$		x	
		saddr, #byte	3	6	8	$(\text{saddr}) \leftarrow (\text{saddr}) \vee \text{byte}$		x	
		A, r Note 3	2	4	–	$A \leftarrow A \vee r$		x	
		r, A	2	4	–	$r \leftarrow r \vee A$		x	
		A, saddr	2	4	5	$A \leftarrow A \vee (\text{saddr})$		x	
		A, !addr16	3	8	9 + n	$A \leftarrow A \vee (\text{addr16})$		x	
		A, [HL]	1	4	5 + n	$A \leftarrow A \vee (\text{HL})$		x	
		A, [HL + byte]	2	8	9 + n	$A \leftarrow A \vee (\text{HL} + \text{byte})$		x	
		A, [HL + B]	2	8	9 + n	$A \leftarrow A \vee (\text{HL} + B)$		x	
		A, [HL + C]	2	8	9 + n	$A \leftarrow A \vee (\text{HL} + C)$		x	
	XOR	A, #byte	2	4	–	$A \leftarrow A \nabla \text{byte}$		x	
		saddr, #byte	3	6	8	$(\text{saddr}) \leftarrow (\text{saddr}) \nabla \text{byte}$		x	
		A, r Note 3	2	4	–	$A \leftarrow A \nabla r$		x	
		r, A	2	4	–	$r \leftarrow r \nabla A$		x	
		A, saddr	2	4	5	$A \leftarrow A \nabla (\text{saddr})$		x	
		A, !addr16	3	8	9 + n	$A \leftarrow A \nabla (\text{addr16})$		x	
		A, [HL]	1	4	5 + n	$A \leftarrow A \nabla (\text{HL})$		x	
		A, [HL + byte]	2	8	9 + n	$A \leftarrow A \nabla (\text{HL} + \text{byte})$		x	
		A, [HL + B]	2	8	9 + n	$A \leftarrow A \nabla (\text{HL} + B)$		x	
		A, [HL + C]	2	8	9 + n	$A \leftarrow A \nabla (\text{HL} + C)$		x	
	CMP	A, #byte	2	4	–	$A - \text{byte}$	x	x	x
		saddr, #byte	3	6	8	$(\text{saddr}) - \text{byte}$	x	x	x
		A, r Note 3	2	4	–	$A - r$	x	x	x
		r, A	2	4	–	$r - A$	x	x	x
		A, saddr	2	4	5	$A - (\text{saddr})$	x	x	x
		A, !addr16	3	8	9 + n	$A - (\text{addr16})$	x	x	x
		A, [HL]	1	4	5 + n	$A - (\text{HL})$	x	x	x
		A, [HL + byte]	2	8	9 + n	$A - (\text{HL} + \text{byte})$	x	x	x
		A, [HL + B]	2	8	9 + n	$A - (\text{HL} + B)$	x	x	x
		A, [HL + C]	2	8	9 + n	$A - (\text{HL} + C)$	x	x	x

- Notes**
1. When the internal high-speed RAM area is accessed or instruction with no data access
 2. When an area except the internal high-speed RAM area is accessed
 3. Except “r = A”

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f_{CPU}) selected by the processor clock control register (PCC).
 2. This clock cycle applies to internal ROM program.
 3. n is the number of waits when external memory expansion area is read from.

Instruction Group	Mnemonic	Operands	Byte	Clock		Operation	Flag		
				Note 1	Note 2		Z	A	CY
16-bit operation	ADDW	AX, #word	3	6	–	AX, CY ← AX + word	×	×	×
	SUBW	AX, #word	3	6	–	AX, CY ← AX – word	×	×	×
	CMPW	AX, #word	3	6	–	AX – word	×	×	×
Multiply/divide	MULU	X	2	16	–	AX ← A × X			
	DIVUW	C	2	25	–	AX (Quotient), C (Remainder) ← AX ÷ C			
Increment/decrement	INC	r	1	2	–	r ← r + 1	×	×	
		saddr	2	4	6	(saddr) ← (saddr) + 1	×	×	
	DEC	r	1	2	–	r ← r – 1	×	×	
		saddr	2	4	6	(saddr) ← (saddr) – 1	×	×	
	INCW	rp	1	4	–	rp ← rp + 1			
DECW	rp	1	4	–	rp ← rp – 1				
Rotate	ROR	A, 1	1	2	–	(CY, A ₇ ← A ₀ , A _{m-1} ← A _m) × 1 time			×
	ROL	A, 1	1	2	–	(CY, A ₀ ← A ₇ , A _{m+1} ← A _m) × 1 time			×
	RORC	A, 1	1	2	–	(CY ← A ₀ , A ₇ ← CY, A _{m-1} ← A _m) × 1 time			×
	ROLC	A, 1	1	2	–	(CY ← A ₇ , A ₀ ← CY, A _{m+1} ← A _m) × 1 time			×
	ROR4	[HL]	2	10	12 + n + m	A ₃₋₀ ← (HL) ₃₋₀ , (HL) ₇₋₄ ← A ₃₋₀ , (HL) ₃₋₀ ← (HL) ₇₋₄			
	ROL4	[HL]	2	10	12 + n + m	A ₃₋₀ ← (HL) ₇₋₄ , (HL) ₃₋₀ ← A ₃₋₀ , (HL) ₇₋₄ ← (HL) ₃₋₀			
BCD adjust	ADJBA		2	4	–	Decimal Adjust Accumulator after Addition	×	×	×
	ADJBS		2	4	–	Decimal Adjust Accumulator after Subtract	×	×	×
Bit manipulate	MOV1	CY, saddr.bit	3	6	7	CY ← (saddr.bit)			×
		CY, sfr.bit	3	–	7	CY ← sfr.bit			×
		CY, A.bit	2	4	–	CY ← A.bit			×
		CY, PSW.bit	3	–	7	CY ← PSW.bit			×
		CY, [HL].bit	2	6	7 + n	CY ← (HL).bit			×
		saddr.bit, CY	3	6	8	(saddr.bit) ← CY			
		sfr.bit, CY	3	–	8	sfr.bit ← CY			
		A.bit, CY	2	4	–	A.bit ← CY			
		PSW.bit, CY	3	–	8	PSW.bit ← CY			×
[HL].bit, CY	2	6	8 + n + m	(HL).bit ← CY					

- Notes**
1. When the internal high-speed RAM area is accessed or instruction with no data access
 2. When an area except the internal high-speed RAM area is accessed

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f_{CPU}) selected by the processor clock control register (PCC).
 2. This clock cycle applies to internal ROM program.
 3. n is the number of waits when external memory expansion area is read from.
 4. m is the number of waits when external memory expansion area is written to.

Instruction Group	Mnemonic	Operands	Byte	Clock		Operation	Flag			
				Note 1	Note 2		Z	AC	CY	
Bit manipulate	AND1	CY, saddr.bit	3	6	7	$CY \leftarrow CY \wedge (\text{saddr.bit})$			×	
		CY, sfr.bit	3	–	7	$CY \leftarrow CY \wedge \text{sfr.bit}$			×	
		CY, A.bit	2	4	–	$CY \leftarrow CY \wedge A.\text{bit}$			×	
		CY, PSW.bit	3	–	7	$CY \leftarrow CY \wedge \text{PSW.bit}$			×	
		CY, [HL].bit	2	6	7 + n	$CY \leftarrow CY \wedge (\text{HL}).\text{bit}$			×	
	OR1	CY, saddr.bit	3	6	7	$CY \leftarrow CY \vee (\text{saddr.bit})$			×	
		CY, sfr.bit	3	–	7	$CY \leftarrow CY \vee \text{sfr.bit}$			×	
		CY, A.bit	2	4	–	$CY \leftarrow CY \vee A.\text{bit}$			×	
		CY, PSW.bit	3	–	7	$CY \leftarrow CY \vee \text{PSW.bit}$			×	
		CY, [HL].bit	2	6	7 + n	$CY \leftarrow CY \vee (\text{HL}).\text{bit}$			×	
	XOR1	CY, saddr.bit	3	6	7	$CY \leftarrow CY \oplus (\text{saddr.bit})$			×	
		CY, sfr.bit	3	–	7	$CY \leftarrow CY \oplus \text{sfr.bit}$			×	
		CY, A.bit	2	4	–	$CY \leftarrow CY \oplus A.\text{bit}$			×	
		CY, PSW.bit	3	–	7	$CY \leftarrow CY \oplus \text{PSW.bit}$			×	
		CY, [HL].bit	2	6	7 + n	$CY \leftarrow CY \oplus (\text{HL}).\text{bit}$			×	
	SET1	saddr.bit	2	4	6	$(\text{saddr.bit}) \leftarrow 1$				
		sfr.bit	3	–	8	$\text{sfr.bit} \leftarrow 1$				
		A.bit	2	4	–	$A.\text{bit} \leftarrow 1$				
		PSW.bit	2	–	6	$\text{PSW.bit} \leftarrow 1$		×	×	×
		[HL].bit	2	6	8 + n + m	$(\text{HL}).\text{bit} \leftarrow 1$				
	CLR1	saddr.bit	2	4	6	$(\text{saddr.bit}) \leftarrow 0$				
		sfr.bit	3	–	8	$\text{sfr.bit} \leftarrow 0$				
		A.bit	2	4	–	$A.\text{bit} \leftarrow 0$				
		PSW.bit	2	–	6	$\text{PSW.bit} \leftarrow 0$		×	×	×
		[HL].bit	2	6	8 + n + m	$(\text{HL}).\text{bit} \leftarrow 0$				
SET1	CY	1	2	–	$CY \leftarrow 1$			1		
CLR1	CY	1	2	–	$CY \leftarrow 0$			0		
NOT1	CY	1	2	–	$CY \leftarrow \overline{CY}$			×		

- Notes**
1. When the internal high-speed RAM area is accessed or instruction with no data access
 2. When an area except the internal high-speed RAM area is accessed

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f_{CPU}) selected by the processor clock control register (PCC).
 2. This clock cycle applies to internal ROM program.
 3. n is the number of waits when external memory expansion area is read from.
 4. m is the number of waits when external memory expansion area is written to.

Instruction Group	Mnemonic	Operands	Byte	Clock		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
Call/return	CALL	!addr16	3	7	–	$(SP - 1) \leftarrow (PC + 3)_H, (SP - 2) \leftarrow (PC + 3)_L,$ $PC \leftarrow \text{addr16}, SP \leftarrow SP - 2$			
	CALLF	!addr11	2	5	–	$(SP - 1) \leftarrow (PC + 2)_H, (SP - 2) \leftarrow (PC + 2)_L,$ $PC_{15-11} \leftarrow 00001, PC_{10-0} \leftarrow \text{addr11},$ $SP \leftarrow SP - 2$			
	CALLT	[addr5]	1	6	–	$(SP - 1) \leftarrow (PC + 1)_H, (SP - 2) \leftarrow (PC + 1)_L,$ $PC_H \leftarrow (00000000, \text{addr5} + 1),$ $PC_L \leftarrow (00000000, \text{addr5}),$ $SP \leftarrow SP - 2$			
	BRK		1	6	–	$(SP - 1) \leftarrow PSW, (SP - 2) \leftarrow (PC + 1)_H,$ $(SP - 3) \leftarrow (PC + 1)_L, PC_H \leftarrow (003FH),$ $PC_L \leftarrow (003EH), SP \leftarrow SP - 3, IE \leftarrow 0$			
	RET		1	6	–	$PC_H \leftarrow (SP + 1), PC_L \leftarrow (SP),$ $SP \leftarrow SP + 2$			
	RETI		1	6	–	$PC_H \leftarrow (SP + 1), PC_L \leftarrow (SP),$ $PSW \leftarrow (SP + 2), SP \leftarrow SP + 3,$ $NMIS \leftarrow 0$	R	R	R
	RETB		1	6	–	$PC_H \leftarrow (SP + 1), PC_L \leftarrow (SP),$ $PSW \leftarrow (SP + 2), SP \leftarrow SP + 3$	R	R	R
Stack manipulate	PUSH	PSW	1	2	–	$(SP - 1) \leftarrow PSW, SP \leftarrow SP - 1$			
		rp	1	4	–	$(SP - 1) \leftarrow rp_H, (SP - 2) \leftarrow rp_L,$ $SP \leftarrow SP - 2$			
	POP	PSW	1	2	–	$PSW \leftarrow (SP), SP \leftarrow SP + 1$	R	R	R
		rp	1	4	–	$rp_H \leftarrow (SP + 1), rp_L \leftarrow (SP),$ $SP \leftarrow SP + 2$			
	MOVW	SP, #word	4	–	10	$SP \leftarrow \text{word}$			
		SP, AX	2	–	8	$SP \leftarrow AX$			
AX, SP		2	–	8	$AX \leftarrow SP$				
Unconditional branch	BR	!addr16	3	6	–	$PC \leftarrow \text{addr16}$			
		\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$			
		AX	2	8	–	$PC_H \leftarrow A, PC_L \leftarrow X$			
Conditional branch	BC	\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$ if CY = 1			
	BNC	\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$ if CY = 0			
	BZ	\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$ if Z = 1			
	BNZ	\$addr16	2	6	–	$PC \leftarrow PC + 2 + \text{jdisp8}$ if Z = 0			

- Notes**
1. When the internal high-speed RAM area is accessed or instruction with no data access
 2. When an area except the internal high-speed RAM area is accessed

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f_{CPU}) selected by the processor clock control register (PCC).
 2. This clock cycle applies to internal ROM program.

Instruction Group	Mnemonic	Operands	Byte	Clock		Operation	Flag		
				Note 1	Note 2		Z	AC	CY
Conditional branch	BT	saddr.bit, \$addr16	3	8	9	PC ← PC + 3 + jdisp8 if(saddr.bit) = 1			
		sfr.bit, \$addr16	4	–	11	PC ← PC + 4 + jdisp8 if sfr.bit = 1			
		A.bit, \$addr16	3	8	–	PC ← PC + 3 + jdisp8 if A.bit = 1			
		PSW.bit, \$addr16	3	–	9	PC ← PC + 3 + jdisp8 if PSW.bit = 1			
		[HL].bit, \$addr16	3	10	11 + n	PC ← PC + 3 + jdisp8 if (HL).bit = 1			
	BF	saddr.bit, \$addr16	4	10	11	PC ← PC + 4 + jdisp8 if(saddr.bit) = 0			
		sfr.bit, \$addr16	4	–	11	PC ← PC + 4 + jdisp8 if sfr.bit = 0			
		A.bit, \$addr16	3	8	–	PC ← PC + 3 + jdisp8 if A.bit = 0			
		PSW.bit, \$addr16	4	–	11	PC ← PC + 4 + jdisp8 if PSW. bit = 0			
		[HL].bit, \$addr16	3	10	11 + n	PC ← PC + 3 + jdisp8 if (HL).bit = 0			
	BTCLR	saddr.bit, \$addr16	4	10	12	PC ← PC + 4 + jdisp8 if(saddr.bit) = 1 then reset(saddr.bit)			
		sfr.bit, \$addr16	4	–	12	PC ← PC + 4 + jdisp8 if sfr.bit = 1 then reset sfr.bit			
		A.bit, \$addr16	3	8	–	PC ← PC + 3 + jdisp8 if A.bit = 1 then reset A.bit			
		PSW.bit, \$addr16	4	–	12	PC ← PC + 4 + jdisp8 if PSW.bit = 1 then reset PSW.bit	×	×	×
		[HL].bit, \$addr16	3	10	12 + n + m	PC ← PC + 3 + jdisp8 if (HL).bit = 1 then reset (HL).bit			
DBNZ	B, \$addr16	2	6	–	B ← B – 1, then PC ← PC + 2 + jdisp8 if B ≠ 0				
	C, \$addr16	2	6	–	C ← C – 1, then PC ← PC + 2 + jdisp8 if C ≠ 0				
	saddr. \$addr16	3	8	10	(saddr) ← (saddr) – 1, then PC ← PC + 3 + jdisp8 if(saddr) ≠ 0				
CPU control	SEL	RBn	2	4	–	RBS1, 0 ← n			
	NOP		1	2	–	No Operation			
	EI		2	–	6	IE ← 1(Enable Interrupt)			
	DI		2	–	6	IE ← 0(Disable Interrupt)			
	HALT		2	6	–	Set HALT Mode			
	STOP		2	6	–	Set STOP Mode			

- Notes**
1. When the internal high-speed RAM area is accessed or instruction with no data access
 2. When an area except the internal high-speed RAM area is accessed

- Remarks**
1. One instruction clock cycle is one cycle of the CPU clock (f_{CPU}) selected by the processor clock control register (PCC).
 2. This clock cycle applies to internal ROM program.
 3. n is the number of waits when external memory expansion area is read from.
 4. m is the number of waits when external memory expansion area is written to.

24.3 Instructions Listed by Addressing Type

(1) 8-bit instructions

MOV, XCH, ADD, ADDC, SUB, SUBC, AND, OR, XOR, CMP, MULU, DIVUW, INC, DEC, ROR, ROL, RORC, ROLC, ROR4, ROL4, PUSH, POP, DBNZ

Second Operand First Operand	#byte	A	r Note	sfr	saddr	!addr16	PSW	[DE]	[HL]	[HL + byte] [HL + B] [HL + C]	\$addr16	1	None
A	ADD ADDC SUB SUBC AND OR XOR CMP		MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV	MOV XCH	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP	MOV XCH ADD ADDC SUB SUBC AND OR XOR CMP		ROR ROL RORC ROLC	
r	MOV	MOV ADD ADDC SUB SUBC AND OR XOR CMP											INC DEC
B, C											DBNZ		
sfr	MOV	MOV											
saddr	MOV ADD ADDC SUB SUBC AND OR XOR CMP	MOV									DBNZ		INC DEC
!addr16		MOV											
PSW	MOV	MOV											PUSH POP
[DE]		MOV											
[HL]		MOV											ROR4 ROL4
[HL + byte] [HL + B] [HL + C]		MOV											
X													MULU
C													DIVUW

Note Except r = A

(2) 16-bit instructions

MOVW, XCHW, ADDW, SUBW, CMPW, PUSH, POP, INCW, DECW

Second Operand \ First Operand	#word	AX	rp ^{Note}	sfrp	saddrp	!addr16	SP	None
AX	ADDW SUBW CMPW		MOVW XCHW	MOVW	MOVW	MOVW	MOVW	
rp	MOVW	MOVW ^{Note}						INCW DECW PUSH POP
sfrp	MOVW	MOVW						
saddrp	MOVW	MOVW						
!addr16		MOVW						
SP	MOVW	MOVW						

Note Only when rp = BC, DE, HL

(3) Bit manipulation instructions

MOV1, AND1, OR1, XOR1, SET1, CLR1, NOT1, BT, BF, BTCLR

Second Operand \ First Operand	A.bit	sfr.bit	saddr.bit	PSW.bit	[HL].bit	CY	\$addr16	None
A.bit						MOV1	BT BF BTCLR	SET1 CLR1
sfr.bit						MOV1	BT BF BTCLR	SET1 CLR1
saddr.bit						MOV1	BT BF BTCLR	SET1 CLR1
PSW.bit						MOV1	BT BF BTCLR	SET1 CLR1
[HL].bit						MOV1	BT BF BTCLR	SET1 CLR1
CY	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1	MOV1 AND1 OR1 XOR1			SET1 CLR1 NOT1

(4) Call instructions/branch instructions

CALL, CALLF, CALLT, BR, BC, BNC, BZ, BNZ, BT, BF, BTCLR, DBNZ

Second Operand First Operand	AX	!addr16	!addr11	[addr5]	\$addr16
Basic instruction	BR	CALL BR	CALLF	CALLT	BR BC BNC BZ BNZ
Compound instruction					BT BF BTCLR DBNZ

(5) Other instructions

ADJBA, ADJBS, BRK, RET, RETI, RETB, SEL, NOP, EI, DI, HALT, STOP

[MEMO]

APPENDIX A DIFFERENCES BETWEEN μ PD78014H, 78018F, 780024A, AND 780034A SUBSERIES

Table A-1 shows the major differences between μ PD78014H, 78018F, 780024A, and 780034A Subseries.

Table A-1. Major Differences between μ PD78014H, 78018F, 780024A, and 780034A Subseries

Name		μ PD78014H Subseries	μ PD78018F Subseries	μ PD780024A, 780034A Subseries
Items				
Anti-EMI noise measure		Provided	None	Provided
Internal I ² C bus version (Y subseries)		None	Exist	Exist (multimaster supported)
PROM (flash memory) version		μ PD78P018F		μ PD78F0034A
Power supply voltage		$V_{DD} = 1.8$ to 5.5 V		
Internal high-speed RAM size		512 bytes μ PD78011H, 78012H 1024 bytes μ PD78013H, 78014H	512 bytes μ PD78011F, 78012F 1024 bytes μ PD78013F, 78014F μ PD78015F, 78016F μ PD78018F	512 bytes μ PD780021A/31A μ PD780022A/32A 1024 bytes μ PD780023A/33A μ PD780024A/34A
Internal expansion RAM size		None	512 bytes μ PD78015F, 78016F 1024 bytes μ PD78018F	None
MIN. instruction execution time		0.4 μ s (10 MHz)		0.24 μ s (8.38 MHz)
Number of I/O port		53		51
A/D converter		8 bits \times 8		8 bits \times 8 10 bits \times 8 (μ PD780034A Subseries)
Operation mode of serial interface	Subseries other than Y series	3-wire/2-wire/SBI: 1 3-wire (automatic transmit and receive): 1		3-wire : 2, UART: 1
	Y subseries	—	3-wire/2-wire/I ² C: 1 3-wire (automatic transmit and receive): 1	3-wire : 1, UART: 1, multimaster I ² C: 1
Package		<ul style="list-style-type: none"> • 64-pin plastic shrink DIP (750 mil) • 64-pin plastic QFP (14 \times 14 mm) 		
		<ul style="list-style-type: none"> • 64-pin plastic LQFP (12 \times 12 mm) 	<ul style="list-style-type: none"> • 64-pin ceramic shrink DIP (with window) (750 mil) Note • 64-pin ceramic WQFN (14 \times 14 mm) Note 	<ul style="list-style-type: none"> • 64-pin plastic LQFP (12 \times 12 mm)
Programmer adapter		PA-78P018CW, PA-78P018GC, PA-78P018GK, PA-78P018KK-S		The development tool system differs from other subseries.
Emulation board		IE-78014-R-EM-A, IE-78018-NS-EM1		
Electric specifications Recommended soldering conditions		Refer to the data sheet of each product.		

Note Only for PROM version

[MEMO]

APPENDIX B DEVELOPMENT TOOLS

The following development tools are available for the development of systems that employ the μ PD780024A, 780034A, 780024AY, and 780034AY Subseries.

Figure B-1 shows the development tool configuration.

- **Support for PC98-NX series**

Unless otherwise specified, products compatible with IBM PC/AT™ computers are compatible with PC98-NX series computers. When using PC98-NX series computers, refer to the explanation for IBM PC/AT computers.


- **Windows**

Unless otherwise specified, "Windows" means the following OSs.

- Windows 3.1
- Windows95
- WindowsNT™ Ver 4.0

Figure B-1. Development Tool Configuration (1/2)


(1) When using the in-circuit emulator IE-78K0-NS

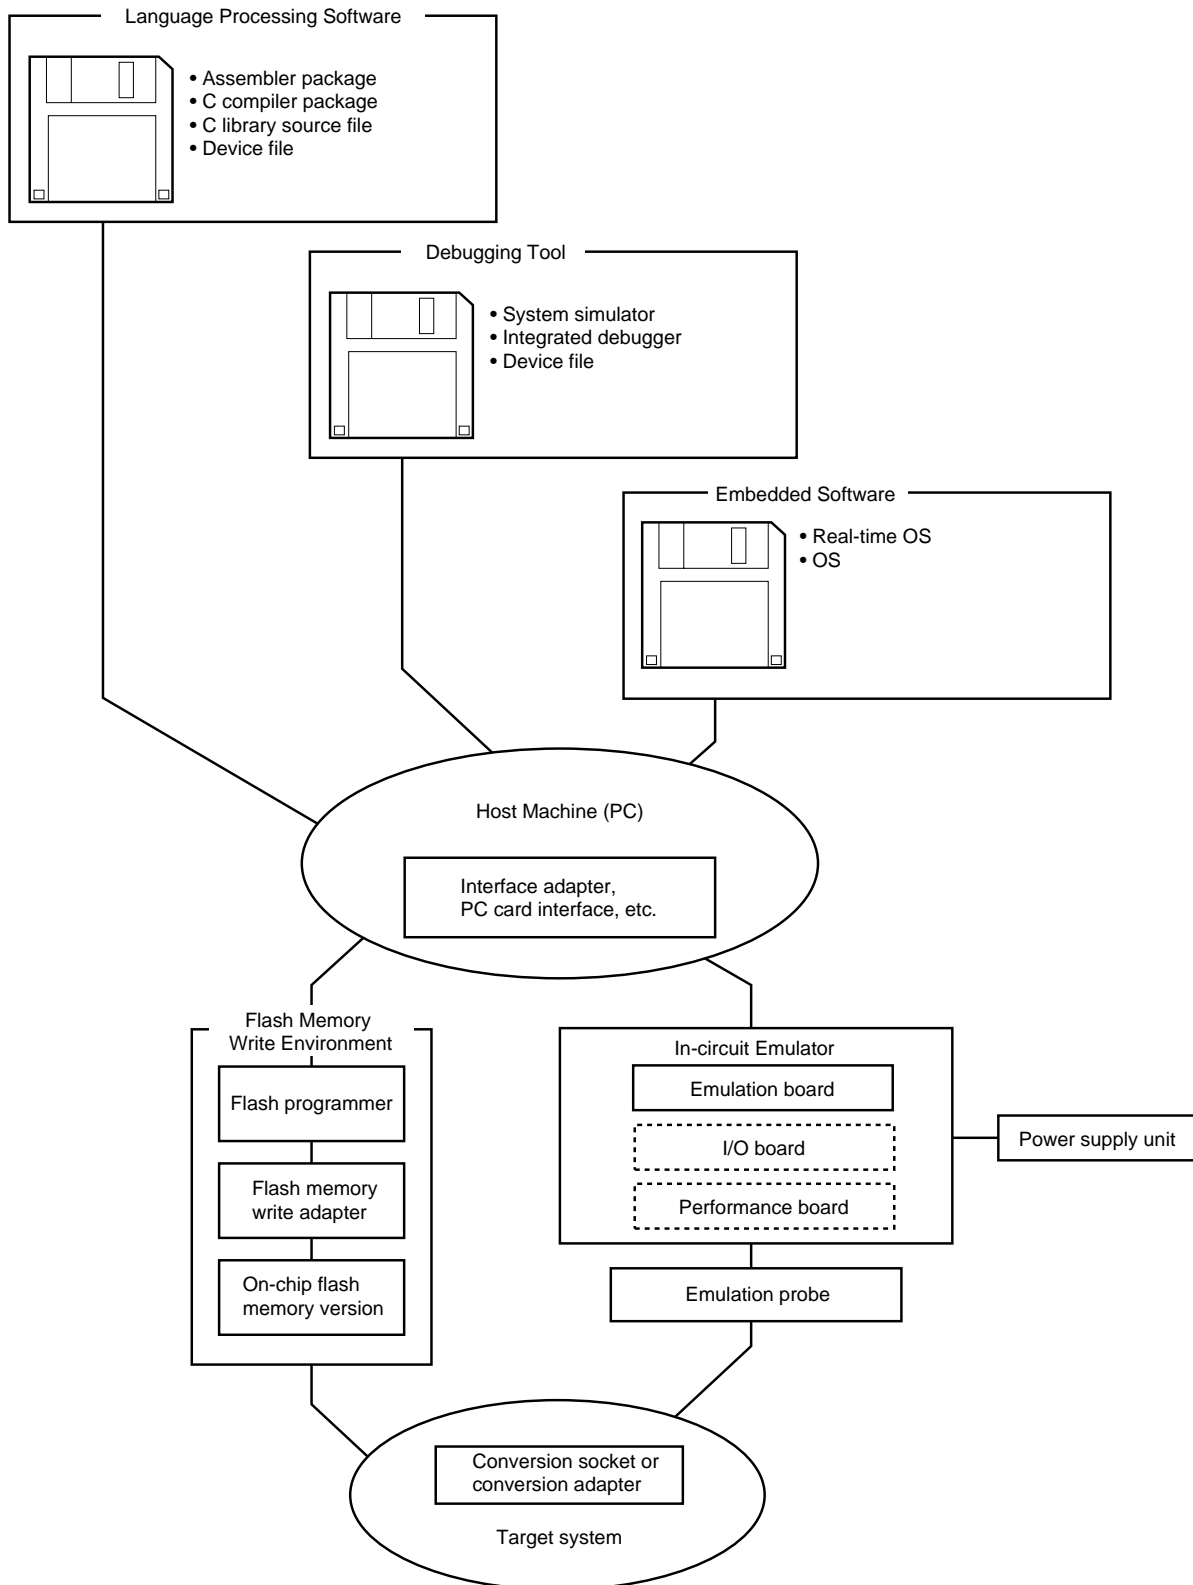

Remark Items in broken line boxes differ according to the development environment. See **B.3.1 Hardware**.

Figure B-1. Development Tool Configuration (2/2)

(2) When using the in-circuit emulator IE-78001-R-A

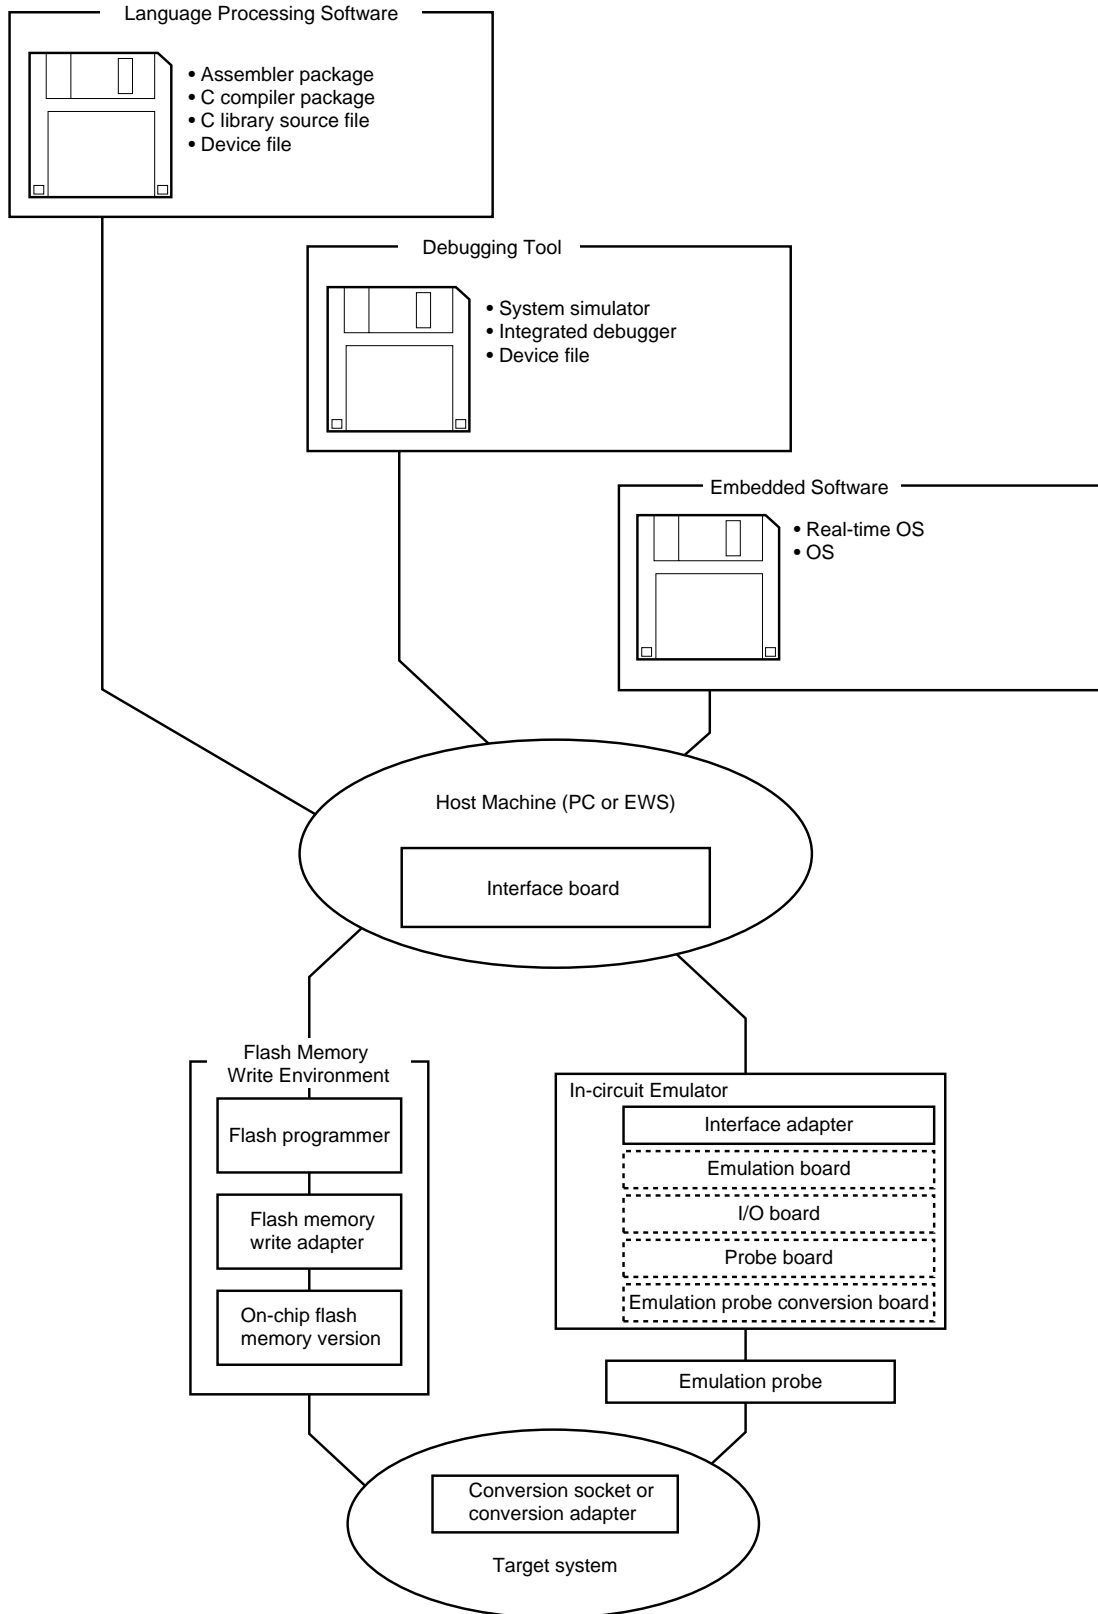

Remark Items in broken line boxes differ according to the development environment. See **B.3.1 Hardware**.

B.1 Language Processing Software

<p>RA78K/0 Assembler Package</p>	<p>This assembler converts programs written in mnemonics into an object codes executable with a microcontroller. Further, this assembler is provided with functions capable of automatically creating symbol tables and branch instruction optimization. This assembler should be used in combination with an optical device file (DF780024 or DF780034). <Precaution when using RA78K/0 in PC environment> This assembler package is a DOS-based application. It can also be used in Windows, however, by using the Project Manager (included in assembler package) on Windows.</p> <p>Part number: μSxxxxRA78K0</p>
<p>CC78K/0 C Compiler Package</p>	<p>This compiler converts programs written in C language into object codes executable with a microcontroller. This compiler should be used in combination with an optical assembler package and device file. <Precaution when using CC78K/0 in PC environment> This C compiler package is a DOS-based application. It can also be used in Windows, however, by using the Project Manager (included in assembler package) on Windows.</p> <p>Part number: μSxxxxCC78K0</p>
<p>DF780024^{Note} DF780034^{Note} Device File</p>	<p>This file contains information peculiar to the device. This device file should be used in combination with an optical tool (RA78K/0, CC78K/0, SM78K0, ID78K0-NS, and ID78K0). Corresponding OS and host machine differ depending on the tool to be used with.</p> <ul style="list-style-type: none"> • DF780024: for μPD780024A, 780024AY Subseries • DF780034: for μPD780034A, 780034AY Subseries <p>Part number: μSxxxxDF780024, μSxxxxDF780034</p>
<p>CC78K/0-L C Library Source File</p>	<p>This is a source file of functions configuring the object library included in the C compiler package (CC78K/0). This file is required to match the object library included in C compiler package to the customer's specifications.</p> <p>Part number: μSxxxxCC78K0-L</p>

Note The DF780024 and DF780034 can be used in common with the RA78K/0, CC78K/0, SM78K0, ID78K0-NS, and ID78K0.

Remark xxxx in the part number differs depending on the host machine and OS used.

μSxxxxRA78K0
 μSxxxxCC78K0
 μSxxxxDF780024
 μSxxxxDF780034
 μSxxxxCC78K0-L

xxxx	Host Machine	OS	Supply Medium
AA13	PC-9800 series	Windows (Japanese version) ^{Note}	3.5-inch 2HD FD
AB13	IBM PC/AT compatibles	Windows (Japanese version) ^{Note}	3.5-inch 2HC FD
BB13		Windows (English version) ^{Note}	
3P16	HP9000 series 700 TM	HP-UX TM (Rel. 10.10)	DAT (DDS)
3K13	SPARCstation TM	SunOS TM (Rel. 4.1.4)	3.5-inch 2HC FD
3K15		Solaris TM (Rel. 2.5.1)	1/4-inch CGMT
3R13	NEWS TM (RISC)	NEWS-OS TM (Rel. 6.1)	3.5-inch 2HC FD

Note Can be operated in DOS environment.

B.2 Flash Memory Writing Tools

Flashpro II (part number: FL-PR2) Flashpro III (part number: FL-PR3, PG-FP3) Flash Programmer	Flash programmer dedicated to microcontrollers with on-chip flash memory.
FA-64CW FA-64GC FA-64GK ^{Note} Flash Memory Writing Adapter	Flash memory writing adapter used connected to the Flashpro II and Flashpro III. <ul style="list-style-type: none"> FA-64CW : 64-pin plastic shrink DIP (CW type) FA-64GC : 64-pin plastic QFP (GC-AB8 type) FA-64GK : 64-pin plastic LQFP (GK-8A8 type)

Note Under development.

Remark FL-PR2, FL-PR3, FA-64CW, FA-64GC, and FA-64GK are products of Naito Densai Machida Mfg. Co., Ltd.

Phone: (044) 822-3813 Naito Densai Machida Mfg. Co., Ltd.

B.3 Debugging Tools

B.3.1 Hardware (1/2)

(1) When using the in-circuit emulator IE-78K0-NS

IE-78K0-NS In-circuit Emulator	The in-circuit emulator serves to debug hardware and software when developing application systems using a 78K/0 Series product. It corresponds to integrated debugger (ID78K0-NS). This emulator should be used in combination with power supply unit, emulation probe, and interface adapter which is required to connect this emulator to the host machine.
IE-78K0-NS-PA ^{Note} Performance Board	This board is connected to the IE-78K0-NS to expand its functions. Adding this board adds a coverage function and enhances debugging functions such as tracer and timer functions.
IE-70000-MC-PS-B Power Supply Unit	This adapter is used for supplying power from a receptacle of 100-V to 240-V AC.
IE-70000-98-IF-C Interface Adapter	This adapter is required when using the PC-9800 series computer (except notebook type) as the IE-78K0-NS host machine (C bus compatible).
IE-70000-CD-IF-A PC Card Interface	This is PC card and interface cable required when using notebook-type computer as the IE-78K0-NS host machine (PCMCIA socket compatible).
IE-70000-PC-IF-C Interface Adapter	This adapter is required when using the IBM PC compatible computers as the IE-78K0-NS host machine (ISA bus compatible).
IE-70000-PCI-IF Interface Adapter	This adapter is required when using a computer with PCI bus as the IE-78K0-NS host machine.
IE-780034-NS-EM1 ^{Note} Emulation Board	This board emulates the operations of the peripheral hardware peculiar to a device. It should be used in combination with an in-circuit emulator.
NP-64CW Emulation Probe	This probe is used to connect the in-circuit emulator to a target system and is designed for use with 64-pin plastic shrink DIP (CW type).
NP-64GC Emulation Probe	This probe is used to connect the in-circuit emulator to a target system and is designed for use with 64-pin plastic QFP (GC-AB8 type).
EV-9200GC-64 Conversion Socket (See Figures B-2 and B-3)	This conversion socket connects the NP-64GC to a target system board designed for a 64-pin plastic QFP (GC-AB8 type).
NP-64GC-TQ Emulation Probe	This probe is used to connect the in-circuit emulator to a target system and is designed for use with 64-pin plastic QFP (GC-AB8 type).
TGC-064SAP Conversion Adapter	This conversion adapter connects the NP-64GC-TQ to a target system board designed for a 64-pin plastic LQFP (GK-8A8 type).
NP-64GK Emulation Probe	This probe is used to connect the in-circuit emulator to a target system and is designed for use with 64-pin plastic LQFP (GK-8A8 type).
TGK-064SBW Conversion Adapter (See Figure B-4)	This conversion socket connects the NP-64GK to a target system board designed for a 64-pin plastic LQFP (GK-8A8 type).

Note Under development

Remarks 1. NP-64CW, NP-64GC, NP-64GC-TQ, and NP-64GK are products of Naito Densai Machida Mfg. Co., Ltd.

Phone: (044) 822-3813 Naito Densai Machida Mfg. Co., Ltd.

2. TGK-064SBW and TGC-064SAP are products of TOKYO ELETECH CORPORATION.

Inquiry: Daimaru Kogyo, Ltd. Phone: Tokyo (03) 3820-7112 Electronics Dept.

Osaka (06) 6244-6672 Electronics 2nd Dept.

3. EV-9200GC-64 is sold in five units.

4. TGK-064SBW and TGC-064SAP are sold in one units.

B.3.1 Hardware (2/2)

(2) When using the in-circuit emulator IE-78001-R-A

IE-78001-R-A In-circuit Emulator	The in-circuit emulator serves to debug hardware and software when developing application systems using a 78K/0 Series product. It corresponds to integrated debugger (ID78K0). This emulator should be used in combination with emulation probe and interface adapter, which is required to connect this emulator to the host machine.
IE-7000-98-IF-C Interface Adapter	This adapter is required when using the PC-9800 series computer (except notebook type) as the IE-78001-R-A host machine (C bus compatible).
IE-7000-PC-IF-C Interface Adapter	This adapter is required when using the IBM PC/AT compatible computers as the IE-78001-R-A host machine (ISA bus compatible).
IE-70000-PCI-IF Interface Adapter	This board is required when using a computer with PCI bus as the IE-78001-R-A host machine.
IE-78000-R-SV3 Interface Adapter	This is adapter and cable required when using an EWS computer as the IE-78001-R-A host machine, and is used connected to the board in the IE-78000-R-A. As Ethernet™, 10Base-5 is supported. With the other method, a commercially available conversion adapter is necessary.
IE-780034-NS-EM1 Emulation Board	This board emulates the operations of the peripheral hardware peculiar to a device. It should be used in combination with an in-circuit emulator and emulation conversion board.
IE-78K0-R-EX1 Emulation Probe Conversion Board	This board is required when using the IE-780034-NS-EM1 on the IE-78001-R-A.
EP-78240CW-R Emulation Probe	This probe is used to connect the in-circuit emulator to a target system and is designed for use with 64-pin plastic shrink DIP (CW type).
EP-78240GC-R Emulation Probe	This probe is used to connect the in-circuit emulator to a target system and is designed for use with 64-pin plastic QFP (GC-AB8 type).
EV-9200GC-64 Conversion Socket (See Figures B-2 and B-3)	This conversion socket connects the EP-78240GC-R to a target system board designed for a 64-pin plastic QFP (GC-AB8 type).
EP-78012GK-R Emulation Probe	This probe is used to connect the in-circuit emulator to a target system and is designed for use with 64-pin plastic LQFP (GK-8A8 type).
TGK-064SBW Conversion Adapter (See Figure B-4)	This conversion socket connects the EP-78012GK-R to a target system board designed for a 64-pin plastic LQFP (GK-8A8 type).

Note Under development

Remarks 1. TGK-064SBW is a product of TOKYO ELETECH CORPORATION.

Inquiry: Daimaru Kogyo, Ltd. Phone: Tokyo (03) 3820-7112 Electronics Dept.

Osaka (06) 244-6672 Electronics 2nd Dept.

2. EV-9200GC-64 is sold in five units.

3. TGK-064SBW is sold in one units.

B.3.2 Software (1/2)

SM78K0 System Simulator	This system simulator is used to perform debugging at C source level or assembler level while simulating the operation of the target system on a host machine. This simulator runs on Windows. Use of the SM78K0 allows the execution of application logical testing and performance testing on an independent basis from hardware development without having to use an in-circuit emulator, thereby providing higher development efficiency and software quality. The SM78K0 should be used in combination with the optical device file (DF780024 or DF780034). Part number: μ SxxxxSM78K0
----------------------------	---

Remark xxxx in the part number differs depending on the host machine and OS used.

μ SxxxxSM78K0

xxxx	Host Machine	OS	Supply Medium
AA13	PC-9800 series	Windows (Japanese version)	3.5-inch 2HD FD
AB13	IBM PC/AT compatibles	Windows (Japanese version)	3.5-inch 2HC FD
BB13		Windows (English version)	

B.3.2 Software (2/2)

ID78K0-NS Integrated Debugger (supporting in-circuit emulator IE-78K0-NS)	This debugger is a control program to debug 78K/0 Series microcontrollers. It adopts a graphical user interface, which is equivalent visually and operationally to Windows or OSF/Motif™. It also has an enhanced debugging function for C language programs, and thus trace results can be displayed on screen in C-language level by using the windows integration function which links a trace result with its source program, disassembled display, and memory display. In addition, by incorporating function modules such as task debugger and system performance analyzer, the efficiency of debugging programs, which run on real-time OSs can be improved. It should be used in combination with the optional device file.
ID78K0 Integrated Debugger (supporting in-circuit emulator IE-78001-R-A)	
Part number: μ SxxxxID78K0-NS, μ SxxxxID78K0	

Remark xxxx in the part number differs depending on the host machine and OS used.

μ SxxxxID78K0-NS

xxxx	Host Machine	OS	Supply Medium
AA13	PC-9800 series	Windows (Japanese version)	3.5-inch 2HD FD
AB13	IBM PC/AT compatibles	Windows (Japanese version)	3.5-inch 2HC FD
BB13		Windows (English version)	

μ SxxxxID78K0

xxxx	Host Machine	OS	Supply Medium
AA13	PC-9800 series	Windows (Japanese version)	3.5-inch 2HD FD
AB13	IBM PC/AT compatibles	Windows (Japanese version)	3.5-inch 2HC FD
BB13		Windows (English version)	
3P16	HP9000 series 700	HP-UX (Rel. 10.10)	DAT (DDS)
3K13	SPARCstation	SunOS (Rel. 4.1.4),	3.5-inch 2HC FD
3K15		Solaris (Rel. 2.5.1)	1/4-inch CGMT
3R13	NEWS™ (RISC)	NEWS-OS (Rel. 6.1)	3.5-inch 2HC FD

B.4 System Upgrade from Former In-circuit Emulator for 78K/0 Series to IE-78001-R-A

If you already have a former in-circuit emulator for 78K/0 Series microcontrollers (IE-78000-R or IE-78000-R-A), that in-circuit emulator can operate as an equivalent to the IE-78001-R-A by replacing its internal break board with the IE-78001-R-BK.


Table B-1. System Upgrade Method from Former In-Circuit Emulator for 78K/0 Series To the IE-78001-R-A

In-circuit Emulator Owned	In-circuit Emulator Cabinet Upgrade ^{Note}	Board To Be Purchased
IE-78000-R	Required	IE-78001-R-BK
IE-78000-R-A	Not required	

Note For upgrading of a cabinet, send your in-circuit emulator to NEC.

Conversion Socket (EV-9200GC-64) Package Drawing and Recommended Board Mounting Pattern


Figure B-2. EV-9200GC-64 Package Drawing (for reference only)

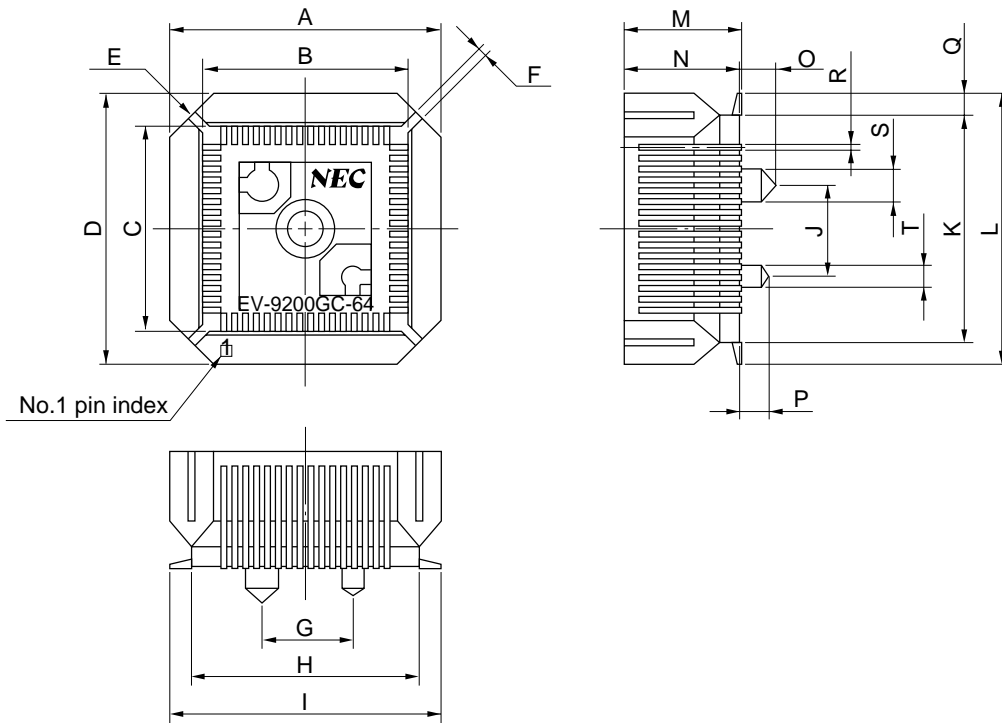

EV-9200GC-64-G0

ITEM	MILLIMETERS	INCHES
A	18.8	0.74
B	14.1	0.555
C	14.1	0.555
D	18.8	0.74
E	4-C 3.0	4-C 0.118
F	0.8	0.031
G	6.0	0.236
H	15.8	0.622
I	18.5	0.728
J	6.0	0.236
K	15.8	0.622
L	18.5	0.728
M	8.0	0.315
N	7.8	0.307
O	2.5	0.098
P	2.0	0.079
Q	1.35	0.053
R	0.35±0.1	0.014 ^{+0.004} _{-0.005}
S	∅2.3	∅0.091
T	∅1.5	∅0.059

Figure B-3. EV-9200GC-64 Recommended Board Mounting Pattern (for reference only)

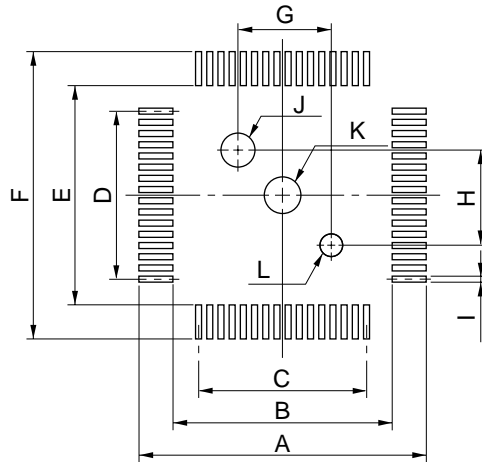


EV-9200GC-64-P1E

ITEM	MILLIMETERS	INCHES
A	19.5	0.768
B	14.8	0.583
C	$0.8 \pm 0.02 \times 15 = 12.0 \pm 0.05$	$0.031^{+0.002}_{-0.001} \times 0.591 = 0.472^{+0.003}_{-0.002}$
D	$0.8 \pm 0.02 \times 15 = 12.0 \pm 0.05$	$0.031^{+0.002}_{-0.001} \times 0.591 = 0.472^{+0.003}_{-0.002}$
E	14.8	0.583
F	19.5	0.768
G	6.00 ± 0.08	$0.236^{+0.004}_{-0.003}$
H	6.00 ± 0.08	$0.236^{+0.004}_{-0.003}$
I	0.5 ± 0.02	$0.197^{+0.001}_{-0.002}$
J	$\phi 2.36 \pm 0.03$	$\phi 0.093^{+0.001}_{-0.002}$
K	$\phi 2.2 \pm 0.1$	$\phi 0.087^{+0.004}_{-0.005}$
L	$\phi 1.57 \pm 0.03$	$\phi 0.062^{+0.001}_{-0.002}$

Caution Dimensions of mount pad for EV-9200 and that for target device (QFP) may be different in some parts. For the recommended mount pad dimensions for QFP, refer to "SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL" (C10535E).

Conversion Adapter Package Drawing (TGK-064SBW)

Figure B-4. TGK-064SBW Package Drawing (for reference only)

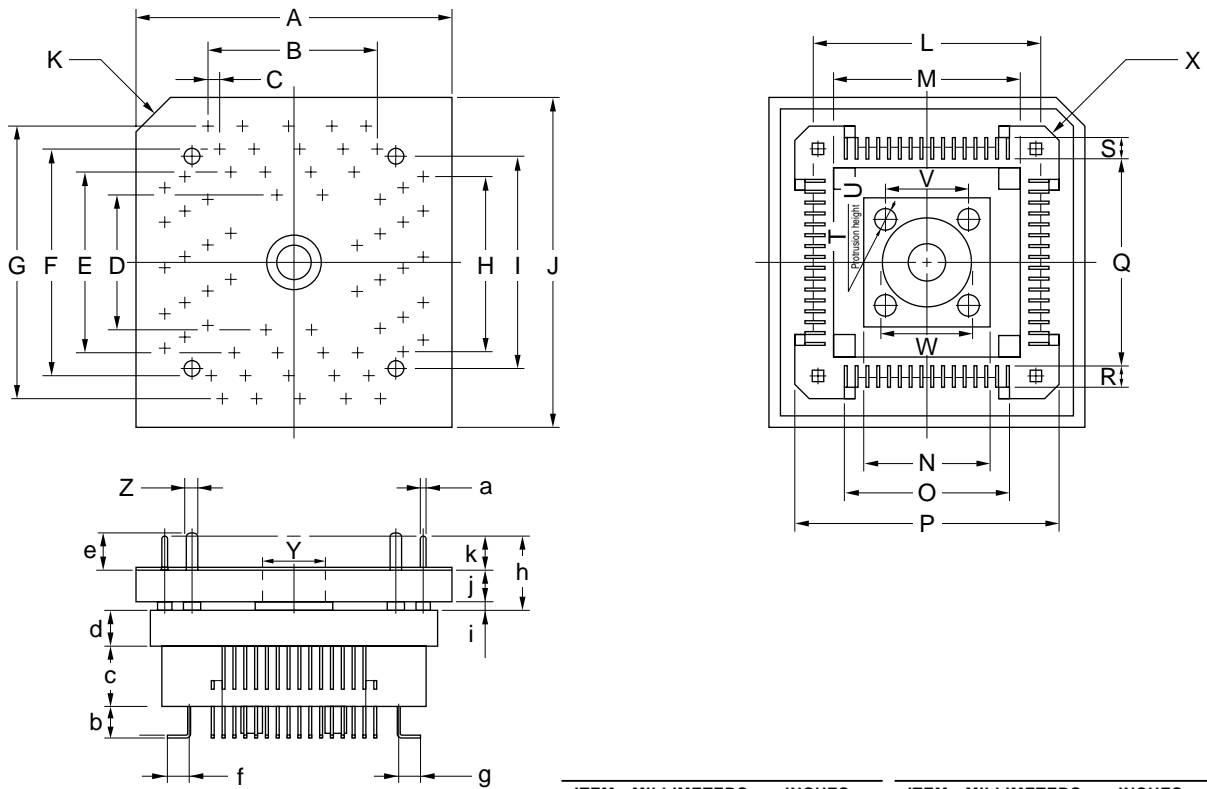

ITEM	MILLIMETERS	INCHES	ITEM	MILLIMETERS	INCHES
A	18.4	0.724	a	φ0.3	φ0.012
B	0.65x15=9.75	0.026x0.591=0.384	b	1.85	0.073
C	0.65	0.026	c	3.5	0.138
D	7.75	0.305	d	2.0	0.079
E	10.15	0.400	e	3.9	0.154
F	12.55	0.494	f	1.325	0.052
G	14.95	0.589	g	1.325	0.052
H	0.65x15=9.75	0.026x0.591=0.384	h	5.9	0.232
I	11.85	0.467	i	0.8	0.031
J	18.4	0.724	j	2.4	0.094
K	C 2.0	C 0.079	k	2.7	0.106
L	12.45	0.490	TGK-064SBW-G0E		
M	10.25	0.404			
N	7.7	0.303			
O	10.02	0.394			
P	14.92	0.587			
Q	11.1	0.437			
R	1.45	0.057			
S	1.45	0.057			
T	4-φ1.3	4-φ0.051			
U	1.8	0.071			
V	5.0	0.197			
W	φ5.3	φ0.209			
X	4-C 1.0	4-C 0.039			
Y	φ3.55	φ0.140			
Z	φ0.9	φ0.035			

note: Product by TOKYO ELETECH CORPORATION.

[MEMO]

APPENDIX C EMBEDDED SOFTWARE

For efficient development and maintenance of the μ PD780024A, 780024AY, 780034A, and 780034AY Subseries, the following embedded products are available.

Real-Time OS (1/2)

RX78K/0 Real-time OS	<p>RX78K/0 is a real-time OS conforming to the μITRON specifications.</p> <p>Tool (configurator) for generating nucleus of RX78K/0 and plural information tables is supplied.</p> <p>Used in combination with an optional assembler package (RA78K/0) and device file (DF780024 or DF780034).</p> <p><Precaution when using RX78K/0 in PC environment></p> <p>The real-time OS is a DOS-based application. It should be used in the DOS Prompt when using in Windows.</p>
	Part number: μ SxxxxRX78013- $\Delta\Delta\Delta\Delta$

Caution When purchasing the RX78K/0, fill in the purchase application form in advance and sign the user agreement.

Remark xxxx and $\Delta\Delta\Delta\Delta$ in the part number differ depending on the host machine and OS used.

μ SxxxxRX78013- $\Delta\Delta\Delta\Delta$

$\Delta\Delta\Delta\Delta$	Product Outline	Maximum Number for Use in Mass Production
001	Evaluation object	Do not use for mass-produced product.
100K	Mass-production object	0.1 million units
001M		1 million units
010M		10 million units
S01	Source program	Source program for mass-produced object

xxxx	Host Machine	OS	Supply Medium
AA13	PC-9800 series	Windows (Japanese version) ^{Note}	3.5-inch 2HD FD
AB13	IBM PC/AT compatibles	Windows (Japanese version) ^{Note}	3.5-inch 2HC FD
BB13		Windows (English version) ^{Note}	
3P16	HP9000 series 700	HP-UX (Rel. 10.10)	DAT (DDS)
3K13	SPARCstation	SunOS (Rel. 4.1.4),	3.5-inch 2HC FD
3K15		Solaris (Rel. 2.5.1)	1/4-inch CGMT
3R13	NEWS (RISC)	NEWS-OS (Rel. 6.1)	3.5-inch 2HC FD

Note Can also be operated in DOS environment.

Real-Time OS (2/2)

MX78K0 OS	<p>MX78K0 is an OS for μTRON specification subsets. A nucleus for the MX78K0 is also included as a companion product.</p> <p>This manages tasks, events, and time. In the task management, determining the task execution order and switching from task to the next task are performed.</p> <p><Precaution when using MX78K0 in PC environment></p> <p>The MX78K0 is a DOS-based application. It should be used in the DOS Prompt when using in Windows.</p>
	<p>Part number: μSxxxxMX78K0-$\Delta\Delta\Delta$</p>

Remark xxxx and $\Delta\Delta\Delta$ in the part number differ depending on the host machine and OS used.

μ SxxxxMX78K0- $\Delta\Delta\Delta$

$\Delta\Delta\Delta$	Product Outline	Maximum Number for Use in Mass Production
001	Evaluation object	Use in preproduction stages.
xx	Mass-production object	Use in mass production stages.
S01	Source program	Only the users who purchased mass-production objects are allowed to purchase this program.

xxxx	Host Machine	OS	Supply Medium
AA13	PC-9800 series	Windows (Japanese version) ^{Note}	3.5-inch 2HD FD
AB13	IBM PC/AT compatibles	Windows (Japanese version) ^{Note}	3.5-inch 2HC FD
BB13		Windows (English version) ^{Note}	
3P16	HP9000 series 700	HP-UX (Rel. 10.10)	DAT (DDS)
3K13	SPARCstation	SunOS (Rel. 4.1.4),	3.5-inch 2HC FD
3K15		Solaris (Rel. 2.5.1)	1/4-inch CGMT
3R13	NEWS (RISC)	NEWS-OS (Rel. 6.1)	3.5-inch 2HC FD

Note Can also be operated in DOS environment.

APPENDIX D REGISTER INDEX

D.1 Register Index (In Alphabetical Order with Respect to Register Names)

[A]

A/D conversion result register 0 (ADCR0) ... 226, 244
A/D converter mode register 0 (ADM0) ... 228, 245
Analog input channel specification register 0 (ADS0) ... 230, 247
Asynchronous serial interface mode register 0 (ASIM0) ... 262
Asynchronous serial interface status register 0 (ASIS0) ... 264

[B]

Baud rate generator control register 0 (BRGC0) ... 270

[C]

Capture/compare control register (CRC0) ... 161
Clock output selection register (CKS) ... 220

[E]

8-bit timer compare register 50 (CR50) ... 187
8-bit timer compare register 51 (CR51) ... 187
8-bit timer/counter 50 (TM50) ... 187
8-bit timer/counter 51 (TM51) ... 187
8-bit timer mode control register 50 (TMC50) ... 188
8-bit timer mode control register 51 (TMC51) ... 189
External interrupt falling edge enable register (EGN) ... 231, 247, 357
External interrupt rising edge enable register (EGP) ... 231, 247, 357

[I]

IIC transfer clock select register 0 (IICCL0) ... 304
IIC control register 0 (IICC0) ... 297
IIC shift register 0 (IIC0) ... 296, 305
IIC status register 0 (IICS0) ... 301
Interrupt mask flag register 0H (MK0H) ... 355
Interrupt mask flag register 0L (MK0L) ... 355
Interrupt mask flag register 1L (MK1L) ... 355
Interrupt request flag register 0H (IF0H) ... 354
Interrupt request flag register 0L (IF0L) ... 354
Interrupt request flag register 1L (IF1L) ... 354

[M]

Memory expansion wait setting register (MM) ... 373
Memory size switching register (IMS) ... 394
Memory expansion mode register (MEM) ... 372

[O]

Oscillation stabilization time select register (OSTS) ... 216, 382

[P]

Port 0 (P0) ... 122
Port 1 (P1) ... 123
Port 2 (P2) ... 124
Port 3 (P3) ... 125, 127
Port 4 (P4) ... 130
Port 5 (P5) ... 131
Port 6 (P6) ... 132
Port 7 (P7) ... 133
Port mode register 0 (PM0) ... 134
Port mode register 2 (PM2) ... 134
Port mode register 3 (PM3) ... 134
Port mode register 4 (PM4) ... 134
Port mode register 5 (PM5) ... 134
Port mode register 6 (PM6) ... 134
Port mode register 7 (PM7) ... 134, 164, 191, 220
Prescaler mode register 0 (PRM0) ... 163
Priority specification flag register 0H (PR0H) ... 356
Priority specification flag register 0L (PR0L) ... 356
Priority specification flag register 1L (PR1L) ... 356
Processor clock control register (PCC) ... 143
Program status word (PSW) ... 98, 358
Pull-up resistor option register 0 (PU0) ... 136
Pull-up resistor option register 2 (PU2) ... 136
Pull-up resistor option register 3 (PU3) ... 136
Pull-up resistor option register 4 (PU4) ... 136
Pull-up resistor option register 5 (PU5) ... 136
Pull-up resistor option register 6 (PU6) ... 136
Pull-up resistor option register 7 (PU7) ... 136

[R]

Receive buffer register 0 (RXB0) ... 261
Receive shift register 0 (RXS0) ... 261

[S]

Serial I/O shift register 30 (SIO30) ... 284
Serial I/O shift register 31 (SIO31) ... 284
Serial operation mode register 30 (CSIM30) ... 285
Serial operation mode register 31 (CSIM31) ... 287
16-bit timer capture/compare register 00 (CR00) ... 158
16-bit timer capture/compare register 01 (CR01) ... 159
16-bit timer mode control register 0 (TMC0) ... 159
16-bit timer output control register 0 (TOC0) ... 162
16-bit timer/counter 0 (TM0) ... 158
Slave address register 0 (SVA0) ... 296, 305

[T]

Timer clock selection register 50 (TCL50) ... 188

Timer clock selection register 51 (TCL51) ... 189

Transmit shift register 0 (TXS0) ... 261

[W]

Watch timer operation mode register (WTM) ... 207

Watchdog timer clock select register (WDCS) ... 214

Watchdog timer mode register (WDTM) ... 215

D.2 Register Index (In Alphabetical Order with Respect to Register Symbol)**[A]**

ADCR0 : A/D conversion result register 0 ... 226, 244
 ADM0 : A/D converter mode register 0 ... 228, 245
 ADS0 : Analog input channel specification register 0 ... 230, 247
 ASIM0 : Asynchronous serial interface mode register 0 ... 262
 ASIS0 : Asynchronous serial interface status register 0 ... 264

[B]

BRGC0 : Baud rate generator control register 0 ... 270

[C]

CRC0 : Capture/compare control register ... 161
 CR00 : 16-bit timer capture/compare register 00 ... 158
 CR01 : 16-bit timer capture/compare register 01 ... 159
 CKS : Clock output select register ... 220
 CR50 : 8-bit timer compare register 50 ... 187
 CR51 : 8-bit timer compare register 51 ... 187
 CSIM30 : Serial operation mode register 30 ... 285
 CSIM31 : Serial operation mode register 31 ... 287

[E]

EGN : External interrupt falling edge enable register ... 231, 247, 357
 EGP : External interrupt rising edge enable register ... 231, 247, 357

[I]

IF0H : Interrupt request flag register 0H ... 354
 IF0L : Interrupt request flag register 0L ... 354
 IF1L : Interrupt request flag register 1L ... 354
 IIC0 : IIC shift register 0 ... 296, 305
 IICC0 : IIC control register 0 ... 297
 IICCL0 : IIC transfer clock select register 0 ... 304
 IICSO : IIC status register 0 ... 301
 IMS : Memory size switching register ... 394

[M]

MEM : Memory expansion mode register ... 372
 MK0H : Interrupt mask flag register 0H ... 355
 MK0L : Interrupt mask flag register 0L ... 355
 MK1L : Interrupt mask flag register 1L ... 355
 MM : Memory expansion wait setting register ... 373

[O]

OSTS : Oscillation stabilization time select register ... 216, 382

[P]

P0	: Port 0 ... 122
P1	: Port 1 ... 123
P2	: Port 2 ... 124
P3	: Port 3 ... 125, 127
P4	: Port 4 ... 130
P5	: Port 5 ... 131
P6	: Port 6 ... 132
P7	: Port 7 ... 133
PCC	: Processor clock control register ... 143
PM0	: Port mode register 0 ... 134
PM2	: Port mode register 2 ... 134
PM3	: Port mode register 3 ... 134
PM4	: Port mode register 4 ... 134
PM5	: Port mode register 5 ... 134
PM6	: Port mode register 6 ... 134
PM7	: Port mode register 7 ... 134, 164, 191, 220
PR0H	: Priority specification flag register 0H ... 356
PR0L	: Priority specification flag register 0L ... 356
PR1L	: Priority specification flag register 1L ... 356
PRM0	: Prescaler mode register 0 ... 163
PSW	: Program status word ... 98, 358
PU0	: Pull-up resistor option register 0 ... 136
PU2	: Pull-up resistor option register 2 ... 136
PU3	: Pull-up resistor option register 3 ... 136
PU4	: Pull-up resistor option register 4 ... 136
PU5	: Pull-up resistor option register 5 ... 136
PU6	: Pull-up resistor option register 6 ... 136
PU7	: Pull-up resistor option register 7 ... 136

[R]

RXB0	: Receive buffer register 0 ... 261
RXS0	: Receive shift register 0 ... 261

[S]

SIO30	: Serial I/O shift register 30 ... 284
SIO31	: Serial I/O shift register 31 ... 284
SVA0	: Slave address register 0 ... 296, 305

[T]

TCL50	: Timer clock selection register 50 ... 188
TCL51	: Timer clock selection register 51 ... 189
TM0	: 16-bit timer/counter 0 ... 158
TM50	: 8-bit timer/counter 50 ... 187
TM51	: 8-bit timer/counter 51 ... 187
TMC0	: 16-bit timer mode control register 0 ... 159
TMC50	: 8-bit timer mode control register 50 ... 188
TMC51	: 8-bit timer mode control register 51 ... 189

TOC0 : 16-bit timer output control register 0 ... 162
TXS0 : Transmit shift register 0 ... 261

[W]

WDCS : Watchdog timer clock select register ... 214
WDTM : Watchdog timer mode register ... 215
WTM : Watch timer operation mode register ... 207

Facsimile Message

From:

Name

Company

Tel.

FAX

Address

Although NEC has taken all possible steps to ensure that the documentation supplied to our customers is complete, bug free and up-to-date, we readily accept that errors may occur. Despite all the care and precautions we've taken, you may encounter problems in the documentation. Please complete this form whenever you'd like to report errors or suggest improvements to us.

Thank you for your kind support.

North America

NEC Electronics Inc.
Corporate Communications Dept.
Fax: 1-800-729-9288
1-408-588-6130

Hong Kong, Philippines, Oceania

NEC Electronics Hong Kong Ltd.
Fax: +852-2886-9022/9044

Asian Nations except Philippines

NEC Electronics Singapore Pte. Ltd.
Fax: +65-250-3583

Europe

NEC Electronics (Europe) GmbH
Technical Documentation Dept.
Fax: +49-211-6503-274

Korea

NEC Electronics Hong Kong Ltd.
Seoul Branch
Fax: 02-528-4411

Japan

NEC Semiconductor Technical Hotline
Fax: 044-548-7900

South America

NEC do Brasil S.A.
Fax: +55-11-6465-6829

Taiwan

NEC Electronics Taiwan Ltd.
Fax: 02-2719-5951

I would like to report the following error/make the following suggestion:

Document title: _____

Document number: _____ Page number: _____

If possible, please fax the referenced page or drawing.

Document Rating	Excellent	Good	Acceptable	Poor
Clarity	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Technical Accuracy	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Organization	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>