

DESCRIPTION

The RH111 is a general purpose voltage comparator. The RH111 offers maximum input offset voltage of 3mV and input offset current of 10nA with a typical response time of 200ns. The RH111 can operate from a single 5V supply to ± 15 V supplies and can drive up to 50mA loads referred to ground or either supply. A separate output Ground pin allows output signals to be isolated from analog ground.


The wafer lots are processed to the requirements of Linear Technology's in-house Class S flow to yield circuits usable in precision space applications.

 LTC and LT are registered trademarks of Linear Technology Corporation.


ABSOLUTE MAXIMUM RATINGS

Supply Voltage (Pin 8 to Pin 4)	36V
Output to Negative Supply (Pin 7 to Pin 4)	35V
Ground to Negative Supply (Pin 1 to Pin 4)	30V
Differential Input Voltage	35V
Voltage at Strobe Pin (Pin 6 to Pin 8)	5V
Input Voltage (Note 1)	± 15 V
Output Short-Circuit Duration	10 sec
Operating Temperature Range (Note 2)	-55°C to 125°C
Storage Temperature Range	-65°C to 150°C
Lead Temperature (Soldering, 10 sec)	300°C

BURN-IN CIRCUIT

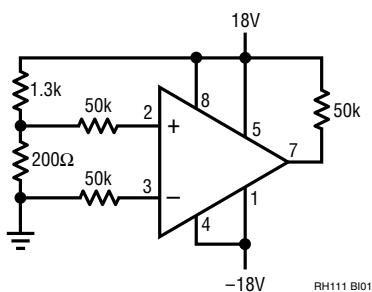

OR

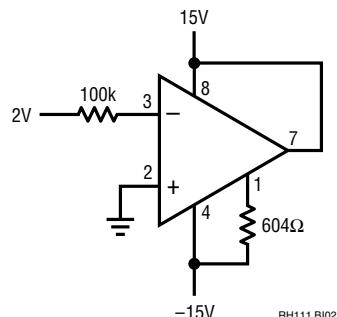

PACKAGE/ORDER INFORMATION

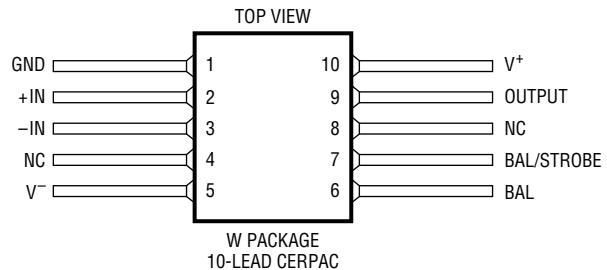
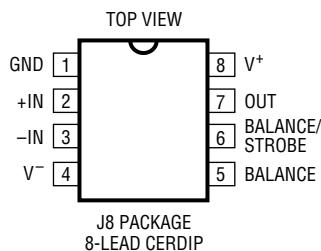
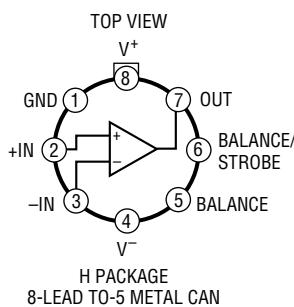


TABLE 1: ELECTRICAL CHARACTERISTICS (Preirradiation) (Note 9)

SYMBOL	PARAMETER	CONDITIONS	NOTES	T _A = 25°C			SUB-GROUP	−55°C ≤ T _A ≤ 125°C			SUB-GROUP	UNITS
				MIN	TYP	MAX		MIN	TYP	MAX		
V _{OS}	Input Offset Voltage	R _S ≤ 50k	3,4		3.0	1			4.0	2,3	mV	
I _{OS}	Input Offset Current		3,4		10	1			20	2,3	nA	
I _B	Input Bias Current		3		100	1			150	2,3	nA	
A _{VOL}	Large-Signal Voltage Gain		7	40		4					V/mV	
	Input Voltage Range	V _S = ±15V, V _{PIN7} ≤ 5V		−14.5	13.0	1	−14.5	13.0	2,3		V	
t _D	Response Time		5	200							ns	
V _{OL}	Output Saturation Voltage	V _{IN} [−] = 5mV, I _{OUT} = 50mA, V ⁺ ≥ 4.5V, V [−] = 0V	8		1.5	1					V	
		V _{IN} [−] = 6mV, I _{OUT} = 8mA	8		0.4	1			0.4	2,3	V	
	Output Leakage Current	V _{IN} ⁺ = 5mV, I _{STROBE} = 3mA, V _{OUT} = 20V, V _{GND} = −15V			10	1			500	2,3	nA	
	Positive Supply Current		8		6.0	1					mA	
	Negative Supply Current		8		5.0	1					mA	
	Strobe Current	Minimum to Ensure Output Transistor Is Turned Off	6	3							mA	
	Input Capacitance			6							pF	

TABLE 1A: ELECTRICAL CHARACTERISTICS (Postirradiation) (Note 9)

SYMBOL	PARAMETER	CONDITIONS	NOTES	10KRAD(Si)		20KRAD(Si)		50KRAD(Si)		100KRAD(Si)		200KRAD(Si)		UNITS
				MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
V _{OS}	Input Offset Voltage	R _S ≤ 50k			3.0		3.0		3.0		3.0		4.0	mV
I _{OS}	Input Offset Current				10		10		10		25		50	nA
I _B	Input Bias Current				100		150		200		300		400	nA
A _{VOL}	Large-Signal Voltage Gain		7	40		40		40		40		25		V/mV
	Input Voltage Range	V _S = ±15V, V _{PIN7} ≤ 5V		−14.5	13.0	−14.5	13.0	−14.5	13.0	−14.5	13.0	−14.5	13.0	V
V _{OL}	Output Saturation Voltage	V _{IN} [−] = 5mV, I _{OUT} = 50mA, V ⁺ ≥ 4.5V, V [−] = 0V	8		1.5		1.5		1.5		1.5		1.5	V
		V _{IN} [−] = 6mV, I _{OUT} = 8mA	8		0.4		0.4		0.4		0.4		0.4	V
	Output Leakage Current	V _{IN} ⁺ = 5mV, I _{STROBE} = 3mA, V _{OUT} = 20V, V _{GND} = −15V			10		10		100		100		100	nA
	Positive Supply Current		8		6.0		6.0		6.0		6.0		6.0	mA
	Negative Supply Current		8		5.0		5.0		5.0		5.0		5.0	mA
	Strobe Current	Minimum to Ensure Output Transistor Is Turned Off	6	3 (Typ)		3(Typ)		3(Typ)		3(Typ)		3(Typ)		mA
	Input Capacitance			6 (Typ)		6(Typ)		6(Typ)		6(Typ)		6(Typ)		pF

Note 1: Applicable for $\pm 15V$ supplies. The positive input voltage limit is 30V above the negative supply. The negative input voltage limit is the negative supply.

Note 2: $T_{JMAX} = 150^\circ C$

Note 3: Offset voltage, offset current and bias current specifications apply for any supply voltage from a single 5V up to $\pm 15V$ supplies.

Note 4: Offset voltage and offset currents shown are the maximum values required to drive the output within a volt of either supply with a 1mA load. These parameters define an error band and take into account the worst-case effects of voltage gain and input impedance.

Note 5: Response time is specified for a 100mV input step with 5mV overdrive with the collector output terminated with a 500Ω pull-up resistor tied to 5V.

Note 6: Do not short the Strobe pin to ground. It should be current driven at 3mA to 5mA for the shortest strobe time. Currents as low as $500\mu A$ will strobe the RH111 if speed is not important. External leakage on the Strobe pin in excess of $0.2\mu A$ when the strobe is "off" can cause offset voltage shifts.

Note 7: $R_L = 1k\Omega$, $-10V \leq V_{OUT} \leq 14.5V$

Note 8: $V_{GND} = 0V$.

Note 9: $V_S = \pm 15V$, $V_{CM} = 0V$, $V_{GND} = V^-$, $T_A = 25^\circ C$, unless otherwise noted.

TOTAL DOSE BIAS CIRCUIT

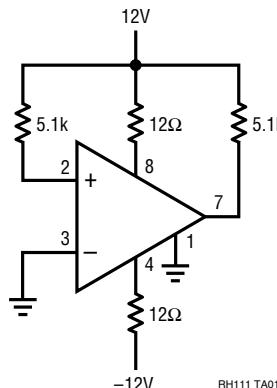


TABLE 2: ELECTRICAL TEST REQUIREMENTS

MIL-STD-883 TEST REQUIREMENTS	SUBGROUP
Final Electrical Test Requirements (Method 5004)	1*,2,3,4
Group A Test Requirements (Method 5005)	1,2,3,4
Group B and D End Point Electrical Parameters (Method 5005)	1,2,3

* PDA Applies to subgroup 1. See PDA Test Notes.


PDA Test Notes

The PDA is specified as 5% based on failures from group A, subgroup 1, tests after cooldown as the final electrical test in accordance with method 5004 of MIL-STD-883 Class B. The verified failures of group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent for the lot.

Linear Technology Corporation reserves the right to test to tighter limits than those given.


TYPICAL PERFORMANCE CHARACTERISTICS

Input Offset Voltage

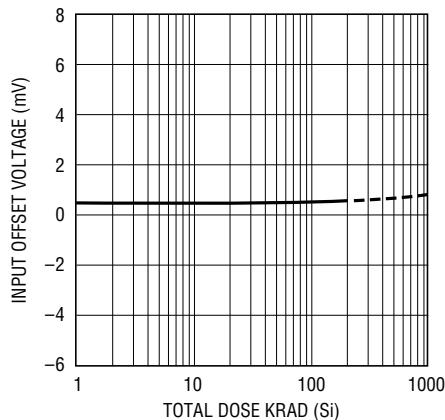


RH111 G01

Voltage Gain

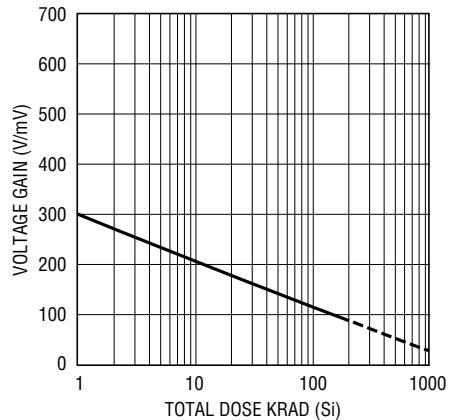


RH111 G02

Input Bias Current

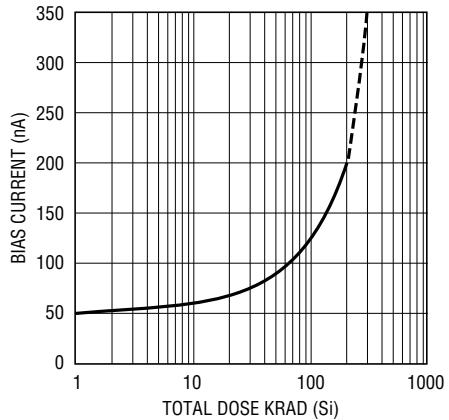


RH111 G03

Common Mode Rejection Ratio

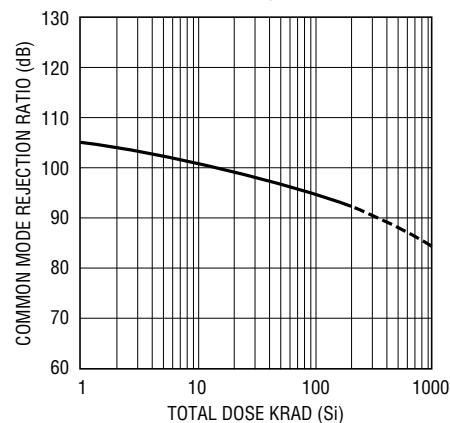

RH111 G04

Input Offset Current

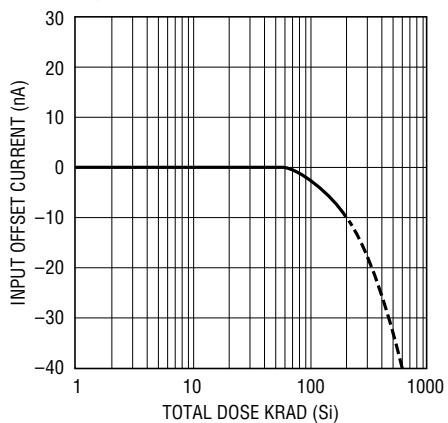

RH111 G05

I.D. No. 66-11-0111 Rev. E 0308