


Precision Operational Amplifier

DESCRIPTION

The RH37C combines very low noise with excellent precision and high speed specifications. The low 1/f noise corner frequency of 2.7Hz combined with 3.5nV $\sqrt{\text{Hz}}$ 10Hz noise and low offset voltage make the RH37C an excellent choice for low frequency military instrumentation applications. The wafer lots are processed to LTC's in-house Class S flow to yield circuits usable in stringent military applications.

For complete electrical specifications and performance curves see the OP-27/OP-37 data sheet.

BURN-IN CIRCUIT

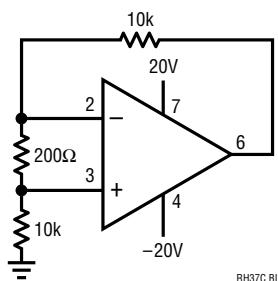

RH37C BI

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	$\pm 22\text{V}$
Internal Power Dissipation	500mW
Input Voltage	Equal to Supply Voltage
Output Short-Circuit Duration	Indefinite
Differential Input Current (Note 8)	$\pm 25\text{mA}$
Operating Temperature Range	-55°C to 125°C
Junction Temperature Range	-55°C to 150°C
Storage Temperature Range	-65°C to 150°C
Lead Temperature (Soldering, 10 sec)	300°C

 LT and LTC are registered trademarks of Linear Technology Corporation.

PACKAGE/ORDER INFORMATION

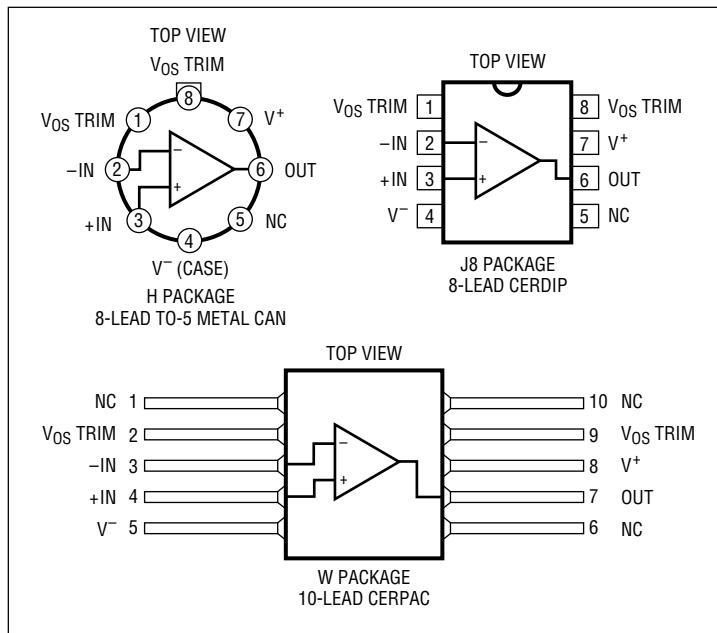


TABLE 1: ELECTRICAL CHARACTERISTICS (Preirradiation) (Note 9)

SYMBOL	PARAMETER	CONDITIONS	NOTES	$T_A = 25^\circ\text{C}$			SUB-GROUP	$-55^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$			SUB-GROUP	UNITS
				MIN	TYP	MAX		MIN	TYP	MAX		
V_{OS}	Input Offset Voltage		1		100		4		300		2, 3	μV
ΔV_{OS} ΔTemp	Average Offset Drift		4, 7						1.8			$\mu\text{V}/^\circ\text{C}$
ΔV_{OS} ΔTime	Long-Term Input Offset Voltage Stability		2, 4		2							$\mu\text{V}/\text{Month}$
I_{OS}	Input Offset Current				75		1		135		2, 3	nA
I_B	Input Bias Current				± 80		1		± 150		2, 3	nA

TABLE 1: ELECTRICAL CHARACTERISTICS (Preirradiation) (Note 9)

SYMBOL	PARAMETER	CONDITIONS	NOTES	TA = 25°C			SUB-GROUP	-55°C ≤ TA ≤ 125°C			SUB-GROUP	UNITS
				MIN	TYP	MAX		MIN	TYP	MAX		
e _n	Input Noise Voltage	0.1Hz to 10Hz	4, 5		0.25							μV _{P-P}
	Input Noise Voltage Density	f ₀ = 10Hz f ₀ = 30Hz f ₀ = 1000Hz	3 4 4		8.0 5.6 4.5							nV/√Hz nV/√Hz nV/√Hz
	Input Noise Current Density	f ₀ = 1000Hz	4, 6		0.6							pV/√Hz
i _n	Input Resistance Common Mode				2							GΩ
	Input Voltage Range		4	±11				±10.2				V
CMRR	Common Mode Rejection Ratio	V _{CM} = ±11V V _{CM} = ±10V		100			1	94			2, 3	dB dB
PSRR	Power Supply Rejection Ratio	V _S = ±4V to ±18V V _S = ±4.5V to ±18V		94			1	86			2, 3	dB dB
A _{VOL}	Large-Signal Voltage Gain	R _L ≥ 2k, V _O = ±10V R _L ≥ 600Ω, V _O = ±1V V _S = ±4V	4	700 200			4	300			5, 6	V/mV V/mV
V _{OUT}	Maximum Output Voltage Swing	R _L = 2k R _L = 600Ω		±11.5 ±10.0			4 4	±10.5			5, 6	V V
SR	Slew Rate	R _L = 2k, A _{VCL} ≥ 5		11			7					V/μs
GBW	Gain-Bandwidth Product	f ₀ = 10kHz (A _{VCL} ≥ 5) f ₀ = 1MHz (A _{VCL} ≥ 5)	4	45 40								MHz MHz
Z ₀	Open-Loop Output Resistance	V _O = 0, I _O = 0		470								Ω
P _D	Power Dissipation			170			1					mW

TABLE 1A: ELECTRICAL CHARACTERISTICS (Postirradiation) (Note 10)

SYMBOL	PARAMETER	CONDITIONS	NOTES	10KRAD(Si)		20KRAD(Si)		50KRAD(Si)		100KRAD(Si)		200KRAD(Si)		UNITS
				MIN	MAX									
V _{OS}	Input Offset Voltage		1	100		130		180		280		400		μV
I _{OS}	Input Offset Current			75		75		90		120		180		nA
I _B	Input Bias Current			±80		±80		±125		±200		±400		nA
i _n	Input Resistance Common Mode			2 (Typ)		2 (Typ)		2 (Typ)		2 (Typ)		2 (Typ)		GΩ
	Input Voltage Range		4	±11		±11		±11		±11		±11		V
CMRR	Common Mode Rejection Ratio	V _{CM} = ±11V		100		100		97		94		90		dB
PSRR	Power Supply Rejection Ratio	V _S = ±4V to ±18V		94		94		92		90		86		dB
A _{VOL}	Large-Signal Voltage Gain	R _L ≥ 2k, V _O = ±10V		700		700		700		700		400		V/mV
V _{OUT}	Maximum Output Voltage Swing	R _L ≥ 10k R _L ≥ 600Ω		±11.5 ±10.0		±11.5 ±10.0		±11.5 ±10.0		±11.5 ±10.0		±11.5 ±10.0		V V
SR	Slew Rate	R _L ≥ 2k		1.7		1.7		1.7		1.5		1		V/μs
Z ₀	Open-Loop Output Resistance	V _O = 0, I _O = 0		70 (Typ)		70 (Typ)		70 (Typ)		70 (Typ)		70 (Typ)		Ω
P _D	Power Dissipation			170		170		170		170		170		mW

TABLE 1A: ELECTRICAL CHARACTERISTICS

Note 1: Input offset voltage measurements are performed by automatic test equipment approximately 0.5 seconds after application of power.

Note 2: Long-term input offset voltage stability refers to the average trend line of offset voltage vs time over the first 30 days of operation. Excluding the initial hour of operation, changes in V_{OS} during the first 30 days are typically $2.5\mu V$. Refer to the typical performance curves.

Note 3: Sample tested to an LTPD of 15 on every lot. Contact factory for 100% testing of 10Hz voltage density noise.

Note 4: Parameter is guaranteed by design, characterization, or correlation to other tested parameters.

Note 5: See test circuit and frequency response curve for 0.1Hz to 10Hz tester on OP-27/OP-37 data sheet.

Note 6: See test circuit for current noise measurement on OP-27/OP-37 data sheet.


Note 7: The average input offset drift performance is within the specifications unnullled or when nulled with a pot having a range $8k\Omega$ to $20k\Omega$.

Note 8: The RH37C's inputs are protected by back-to-back diodes. Current limiting resistors are not used in order to achieve low noise. If differential input voltage exceeds $\pm 0.7V$, the input current should be limited to 25mA.

Note 9: $V_S = \pm 15V$, $V_{CM} = 0V$ unless otherwise noted.


Note 10: $T_A = 25^\circ C$, $V_S = \pm 15V$, $V_{CM} = 0V$, unless otherwise noted.

TOTAL DOSE BIAS CIRCUIT

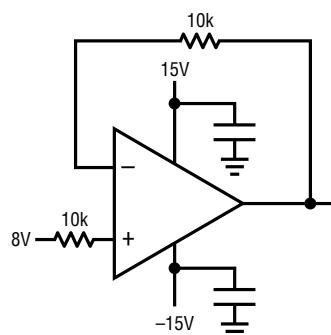


TYPICAL PERFORMANCE CHARACTERISTICS

Positive Slew Rate

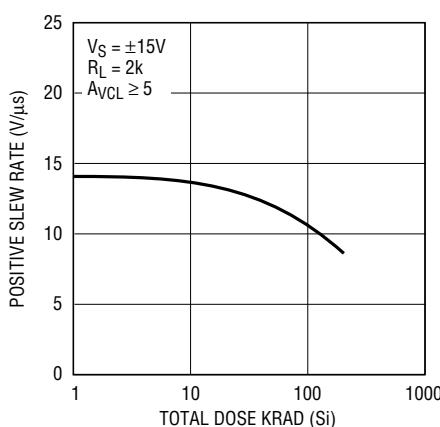


RH37C G01

Negative Slew Rate

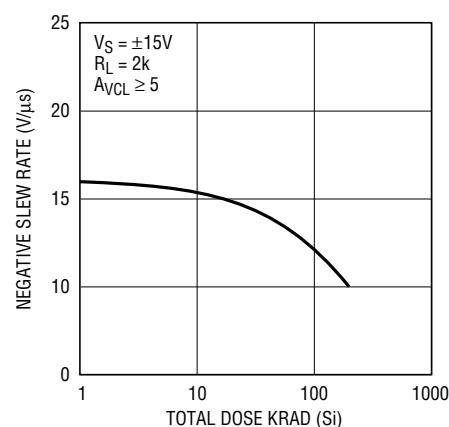


RH37C G02


TYPICAL PERFORMANCE CHARACTERISTICS

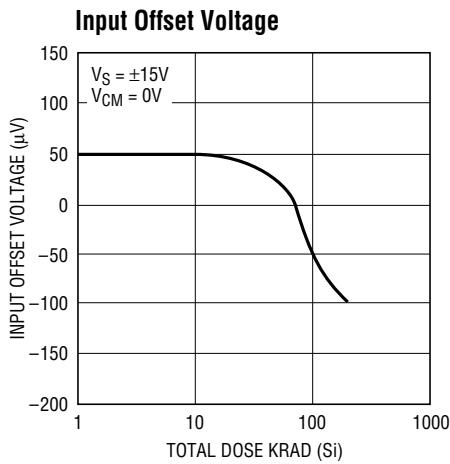


RH37C G03

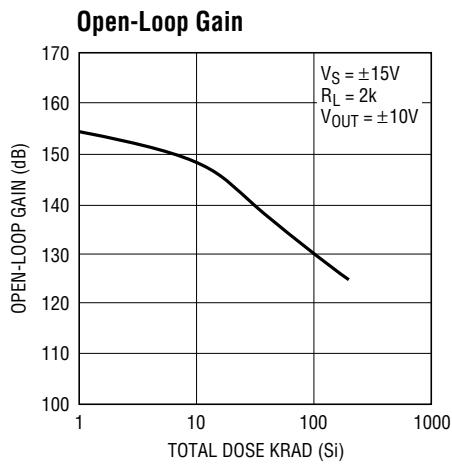


RH37C G04

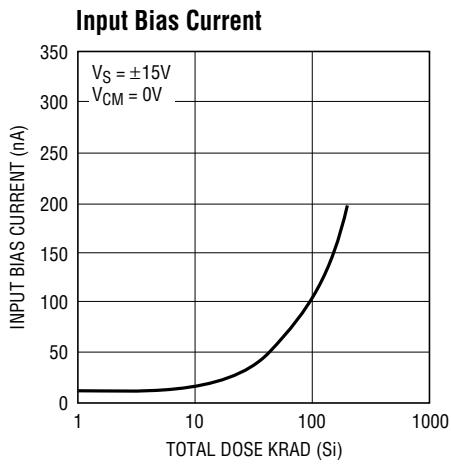


RH37C G05

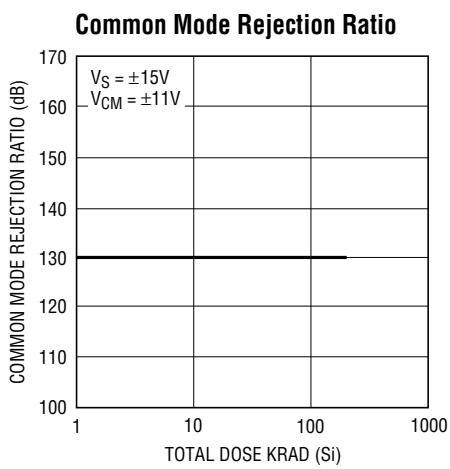

RH37C G06

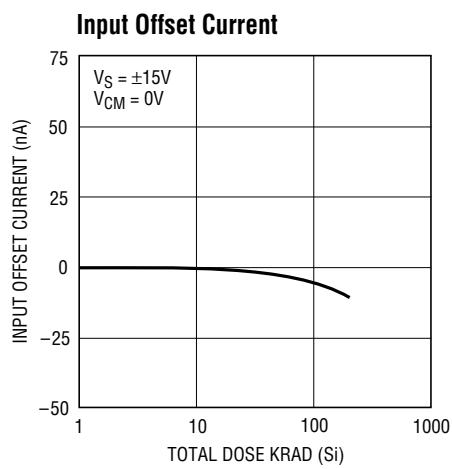

RH37C G07

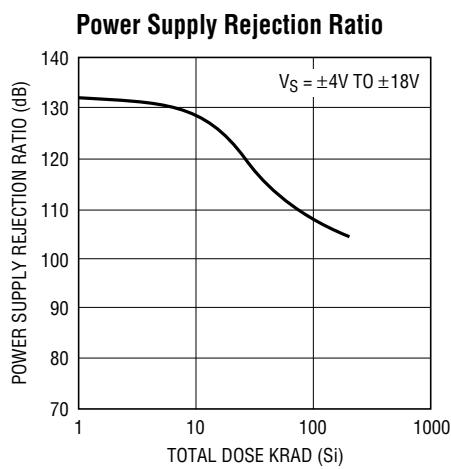

RH37C G08

TABLE 2: ELECTRICAL TEST REQUIREMENTS

MIL-STD-883 TEST REQUIREMENTS	SUBGROUP
Final Electrical Test Requirements (Method 5004)	1*,2,3,4,5,6,7
Group A Test Requirements (Method 5005)	1,2,3,4,5,6,7
Group B and D for Class S, and Group C and D for Class B	1
End Point Electrical Parameters (Method 5005)	

* PDA applies to subgroup 1. See PDA Test Notes.

PDA Test Notes

The PDA is specified as 5% based on failures from group A, subgroup 1, tests after cooldown as the final electrical test in accordance with method 5004 of MIL-STD-883 Class B. The verified failures of group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent for the lot.

Linear Technology Corporation reserves the right to test to tighter limits than those given.

I.D. No. 66-10-0172 Rev. B 0398