



LVC MOS SC-A1470 Series

Rev. J

Description


The **SC-A1470 Series** of quartz crystal oscillators provide enable/disable 3-state LVC MOS compatible signals for bus connected systems. Supplying Pin 1 of the SC-A1470 units with a logic "1" or open enables its Pin 3 output. In the disable mode, Pin 3 presents a high impedance to the load.

Features

- Wide frequency range: 4.0MHz to 20.0MHz
- User specified tolerance ± 100 ppm
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 1000g
- Low Jitter - Wavecrest jitter characterization available
- COTS/Dual use
- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Low power
- No internal PLL avoids cascading PLL problems
- Power Supply Decoupling Internal
- Metal lid electrically connected to ground to reduce EMI
- Gold plated pads
- RoHS Compliant, Lead Free Construction

Electrical Connection

Pin	Connection
1	Enable/Disable
2	Ground
3	Output
4	V_{DD}

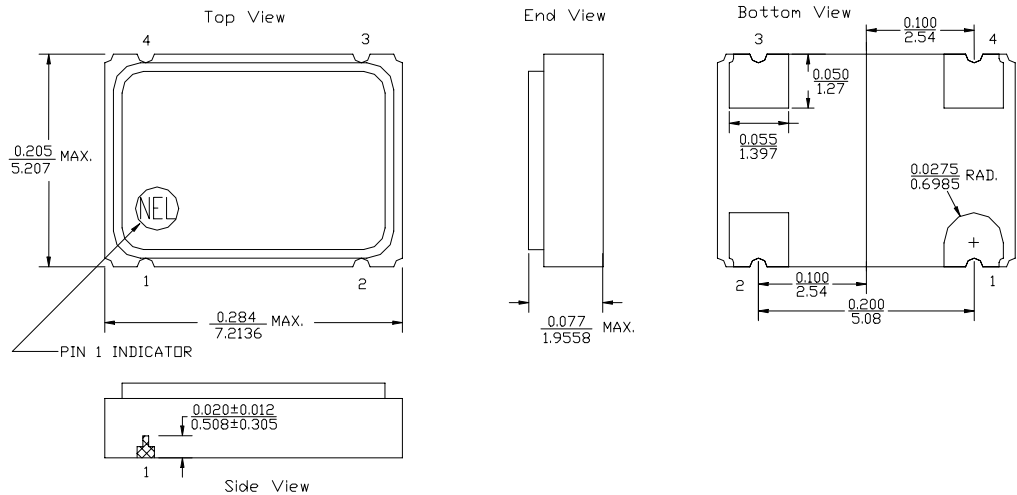

ALL DIMENSIONS: $\frac{IN}{mm}$
 All tolerances are ± 0.005 inches (± 0.127 mm) unless otherwise specified.

SC-A1470 Series Continued
LVCMOS

Rev. J

Operating Conditions and Output Characteristics

Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	----	----	4.0MHz	----	20.0MHz
Duty Cycle	----	@ $V_{DD}/2$	45/55%	----	55/45%
Logic 0	V_{OL}	@ 600 μ A	----	----	0.2V
Logic 1	V_{OH}	@ 600 μ A	$V_{DD}-0.2V$	----	----
Rise & Fall Time	tr,tf	10-90% V_O	----	----	15.0 ns
Jitter, Integrated	J	Integrated from phase noise, 12kHz to 20MHz, RMS	----	0.1 ps	----
Jitter, Wavecrest Characterized ⁽²⁾	----	Random Period	----	2.3ps	----
		Accum, pk-to-pk	----	26ps	----
Phase Noise ⁽³⁾	$\epsilon(\Delta f)$	@ 10Hz	----	-70 dBc/Hz	----
		@ 100Hz	----	-105 dBc/Hz	----
		@ 1kHz	----	-130 dBc/Hz	----
		@ 10kHz	----	-145 dBc/Hz	----
		@ 100kHz	----	-150 dBc/Hz	----
		@ >1Mhz	----	-150 dBc/Hz	----
T_{pz}	----	----	----	----	25 ns
Enable Voltage	----	----	2.0V	----	----
Disable Voltage	----	----	----	----	0.8V
Frequency Stability ⁽¹⁾	dF/F	Overall conditions including: voltage, calibration, temp., 10 year aging, shock, vibration	-100ppm	----	+100ppm

General Characteristics


Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage	V_{DD}	3.3V \pm 5%	3.135V	3.3V	3.465V
Supply Current	I_{DD}	No Load	0.0 mA	----	5 mA
Output current	I_O	Low level Output Current	0.0 mA	----	\pm 16.0 mA
Operating temperature	T_A	----	0°C	----	70°C
Storage temperature	T_S	----	-55°C	----	125°C
Power Dissipation	P_D	----	----	----	17 mW
Load	----	----	----	----	15pf
Start-up Time	t_s	----	----	----	2 ms

Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-883, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz
Hermetic Seal	Leak rate less than 1×10^{-8} atm.cc/sec

Footnotes:

- 1) Standard frequency stability (\pm 20, \pm 25, \pm 50ppm & others available)
- 2) Jitter performance is frequency dependent. Please contact factory for full Wavecrest characterization.
- 3) If phase noise data at a particular frequency is needed, contact factory.

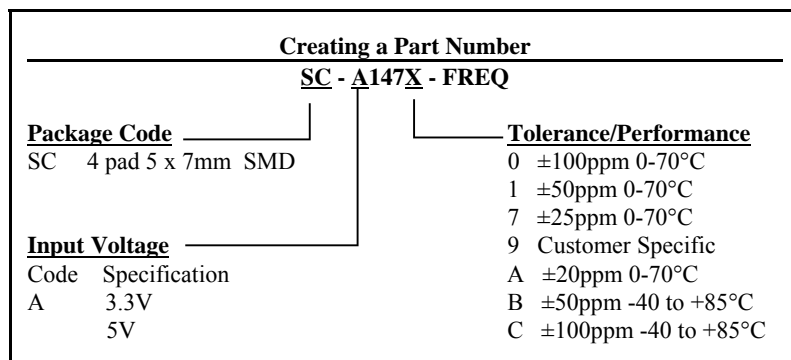

SC-A1470 Series Continued

Max Reflow Profile

