

### LVDS SR-A2D30 Series

#### Description

The **SR-A2D30 Series** of quartz crystal oscillators provides a LVDS compatible signal. This device uses multiple ground pins for improved signal integrity.

#### Features


- Wide frequency range - 250.0MHz to 750.0MHz
- Low noise analog multiplication
- High frequency output eliminates the need for PLL multiplication
- Stabilities over temperatures as low as  $\pm 20$ ppm eliminates SAW oscillator temperature problems
- 3.3V and 2.5V version available
- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- User specified tolerance available
- Cover connected to ground
- High shock resistance, to 1000g
- COTS/Dual use

#### Electrical Connection

Pin Connection

- |   |                 |
|---|-----------------|
| 1 | V <sub>CC</sub> |
| 2 | Ground          |
| 3 | NC or Ground    |
| 4 | Q Output        |
| 5 | /Q Output       |
| 6 | Ground          |
| 7 | Ground          |
| 8 | Enable          |

NEL recommends connecting the large pad located between the general signal pads to ground for heat transfer and improved RF grounding.

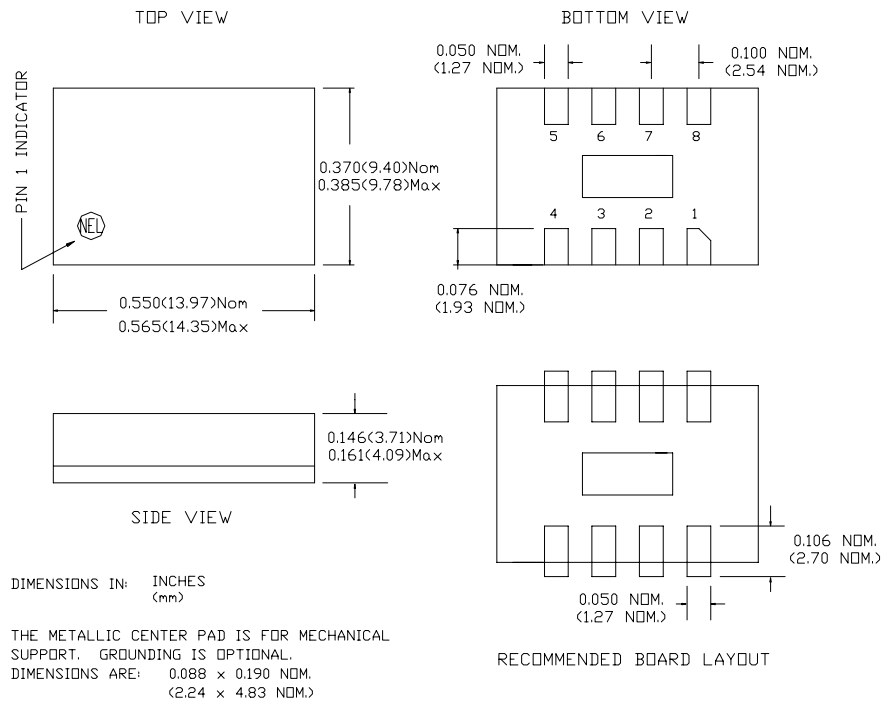

SR-A2D30 Series Continued  
LVDS

Rev. H

## Operating Conditions and Output Characteristics (6)

### Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	-----	-----	250.0MHz	-----	750.0MHz
Sub-harmonic	-----	-----	-----	-45dBc	-40dBc
Harmonic	-----	-----	-----	-----	-10dBc
Duty Cycle <sup>(1)</sup>	-----	@ 50% points	45/55%	-----	55/45%
Logic 0 <sup>(1)</sup>	V <sub>OL</sub>	-----	0.925V	-----	-----
Logic 1 <sup>(1)</sup>	V <sub>OH</sub>	-----	-----	-----	1.474V
Differential Voltage Swing <sup>(1)</sup>	V <sub>DIFF-OUT</sub>	-----	500mV	700mV	-----
Rise & Fall Time <sup>(1)</sup>	tr,tf	20-80%V <sub>O</sub>	-----	-----	300 psec
Jitter RMS <sup>(5)</sup>	-----	-----	-----	0.3 psec	0.5psec
Jitter Deterministic	-----	-----	-----	6 psec	12 psec
Enable Voltage <sup>(2)</sup>	-----	with V <sub>EE</sub> =0V	-----	-----	0.8V
Disable Voltage	-----	with V <sub>EE</sub> =0V	2.0V	-----	-----
Frequency Stability <sup>(3)</sup>	dF/F	Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration	-100ppm	-----	+100ppm
Phase Noise <sup>(4)</sup>	-----	@ 100Hz	-----	-----	-80 dBc/Hz
	-----	@ 1kHz	-----	-----	-115 dBc/Hz
	-----	@ 10kHz	-----	-----	-130 dBc/Hz
	-----	@ 100kHz	-----	-----	-130 dBc/Hz
	-----	@ 1MHz	-----	-----	-135 dBc/Hz
	-----	@ 10MHz	-----	-----	-135 dBc/Hz

### General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage	V <sub>CC</sub>	3.3V±5%	3.135V	3.3V	3.465V
Supply Current	I <sub>CC</sub>	-----	0.0 mA	-----	120 mA
Output current	I <sub>O</sub>	Low level Output Current	0.0 mA	-----	±50.0 mA
Operating temperature	T <sub>A</sub>	-----	0°C	-----	70°C
Storage temperature	T <sub>S</sub>	-----	-55°C	-----	125°C
Input: Logic High (ECL) - Disables V <sub>EE</sub> or Open - Enables					
Load	50 Ohm to V <sub>CC</sub> -2V or Thevenin Equivalent, Bias Required				
Start-up time	t <sub>s</sub>	-----	-----	2 ms	10 ms

### Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-833, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz


#### Footnotes:

- 1) With load of 100 ohms across differential outputs.
- 2) Open to Enable pin also enables the output.
- 3) Standard frequency stability (others available)
- 4) Phase Noise characterization available. Phase Noise is frequency dependant, phase noise specification references a 1.0GHz part.
- 5) Jitter performance is frequency dependant. Please contact factory for full Aeroflex characterization. RMS jitter bandwidth of 12kHz to 20MHz
- 6) All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal load.

#### Creating a Part Number

SR - A2D3X - FREQ	
<b>Package Code</b>	<b>Tolerance/Performance</b>
SR 8 pad 9x14mm SMD	0 ±100ppm 0-70°C
	1 ±50ppm 0-70°C
	7 ±25ppm 0-70°C
	9 Customer Specific
<b>Input Voltage</b>	A ±20ppm 0-70°C
Code Specification	B ±50ppm -40 to +85°C
A 3.3V	C ±100ppm -40 to +85°C
B 2.5V	

Max Reflow Profile

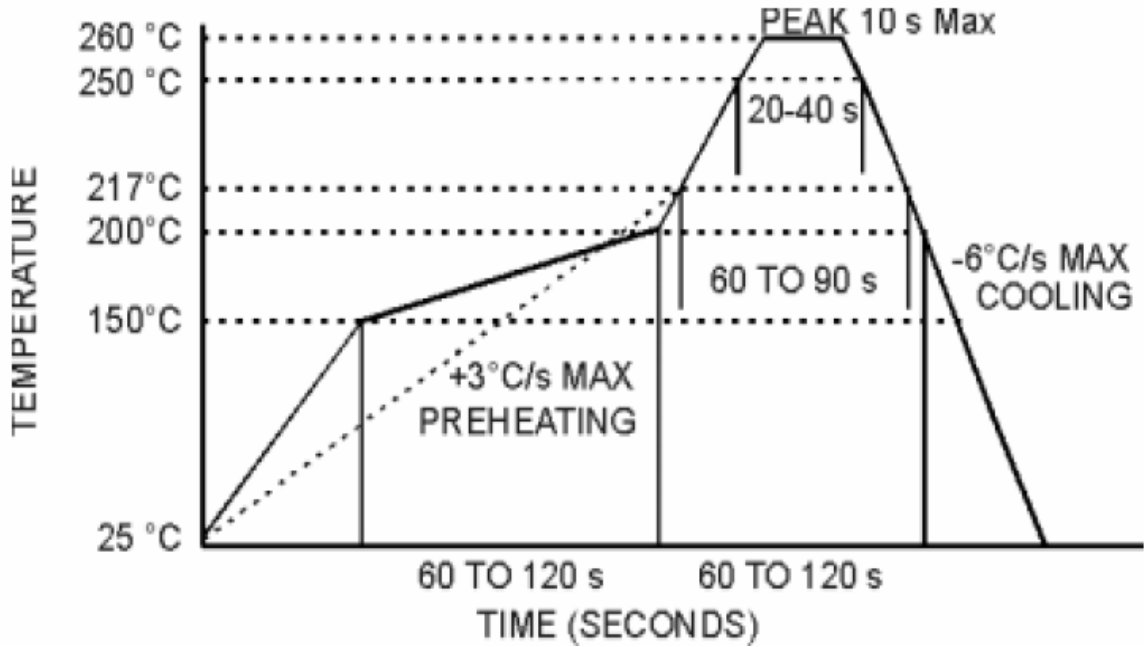

The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.