

**4:1 step down Flux Coupled Transformer  
5-200MHz**


**MABA-008354-CF4A40  
V1**

**Features**


- Surface Mount
- 4:1 step-down Flux Coupled
- 260°C Reflow Compatible
- RoHS\* Compliant
- All wires are welded to the PCB carrier
- Available on Tape and Reel. Reel quantity 2000

**Description**

M/A-COM's MABA-008354-CF4A40 is a 4:1 Flux Coupled step down transformer in a low cost, surface mount package. Ideally suited for high volume CATV/Broadband applications. Suitable for use in 50 Ohm and 75 Ohm systems

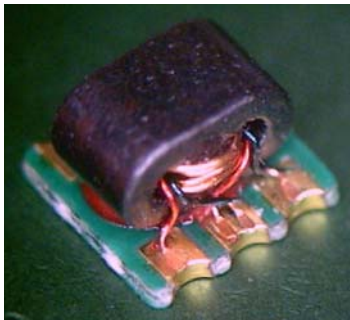

**Schematic**




**Pin Configuration**

Pin No.	Function
1	Secondary Dot (output 1)
2	Centre Tap
3	Secondary (output 2)
4	Primary Dot (input)
5	Primary (ground)

**Ordering Information**

Part Number	Package
MABA-008354-CF4A40	2000
MABA-008354-CF4ATB	Customer Test Board

**Case Style: SM-164**

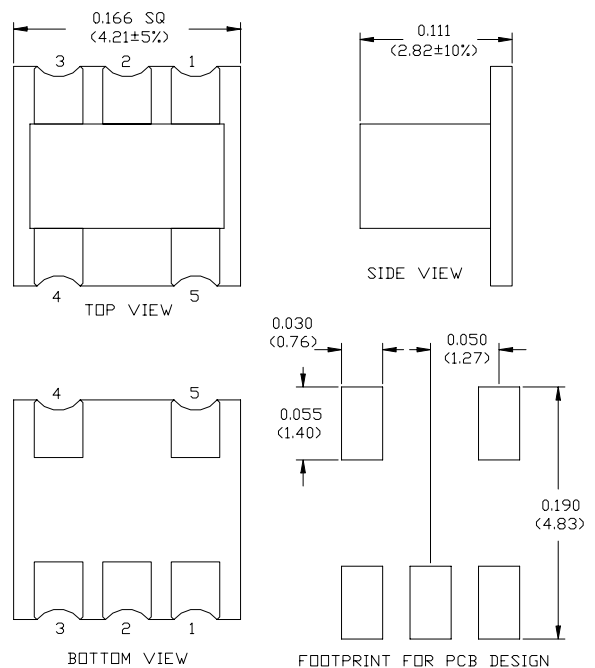

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

Note: Reference Application Note **M513** for reel size information.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

4:1 step down Flux Coupled Transformer  
5-200MHz

MABA-008354-CF4A40  
V1


**Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75\Omega$  <sup>1</sup>**

Parameter	Frequency	Units	Min	Typ	Max
Insertion Loss	5 - 35 MHz	dB	-	0.8	1.1
	35 - 85 MHz	dB	-	1.1	1.6
	85-200 MHz	dB	-	2.2	3.6
Amplitude Balance	5 - 85 MHz	dB	-	$\pm 0.01$	$\pm 0.4$
	85 - 200 MHz	dB	-	$\pm 0.09$	$\pm 0.8$
Phase Balance	5 - 85 MHz	$^\circ$	-	$\pm 0.2$	$\pm 4$
	85 - 200 MHz	$^\circ$	-	$\pm 0.4$	$\pm 5$
Input Return Loss	5 - 35 MHz	dB	15	19	-
	35 - 85 MHz	dB	10	13	-
	85 - 200 MHz	dB	5	8	-

**Absolute Maximum Ratings <sup>1,2</sup>**

Parameter	Absolute Maximum
Max RF Power	1W
Max DC current	250mA per arm
Operating Temperature	-40°C to +60°C
Storage Temperature	-40°C to +85°C

**Recommended PCB Configuration**



FOOTPRINT FOR PCB DESIGN

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

**4:1 step down Flux Coupled Transformer  
5-200MHz**

**MABA-008354-CF4A40  
V1**

**Typical Performance Curves:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 75\Omega$  <sup>1</sup>**

