

1:1 Broadband CATV, Flux Coupled Transformer
5-120MHz

MABACT0047
V1

Features

- Surface Mount
- 1:1 Flux Coupled
- 260°C Reflow Compatible
- Excellent temperature stability
- Available on Tape and Reel. Reel quantity 2000

Description

M/A-COM's MABACT0047 is a low cost 1:1 Flux Coupled Transformer designed for high volume CATV Broadband applications. Suitable for use in 50 Ohm and 75 Ohm systems



Pin Configuration


Pin No.	Function
1	Secondary Dot (output 1)
2	Centre Tap
3	Secondary (output 2)
4	Primary (ground)
5	Primary Dot (input)

Ordering Information



Part Number	Package
MABACT0047	Reel Quantity 2000

Note: Reference Application Note **M513** for reel size information.

Schematic

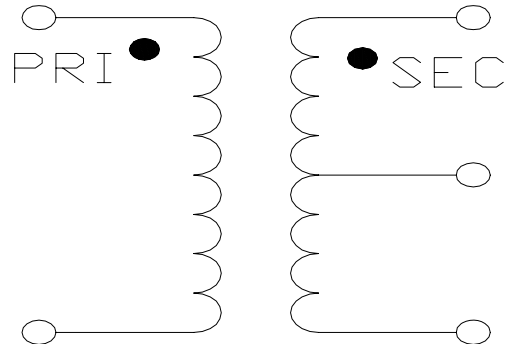

Case Style: SM-22A

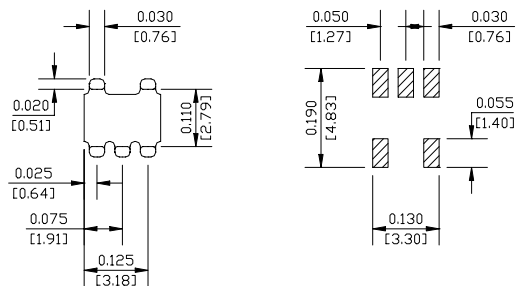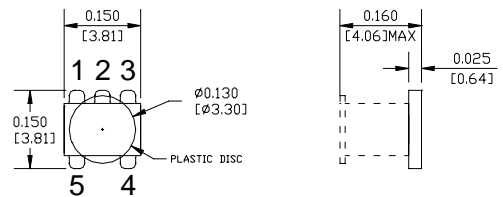

PCB FOOTPRINT

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

1:1 Broadband CATV, Flux Coupled Transformer
5-120MHz

MABACT0047
V1

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹


Parameter	Frequency	Units	Min	Typ	Max
Frequency Range:	5 - 120 MHz				
Insertion Loss	5 - 120 MHz	dB	-	0.4	0.6
Amplitude Balance	5 - 120 MHz	dB	-	± 0.1	± 0.3
Phase Balance	5 - 120 MHz	$^\circ$	-	± 0.5	± 2.0
Input Return Loss	5 - 65 MHz	dB	22	28	-
	65 - 120 MHz	dB	17	23	-

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	250 mW
DC current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

Recommended PCB Configuration

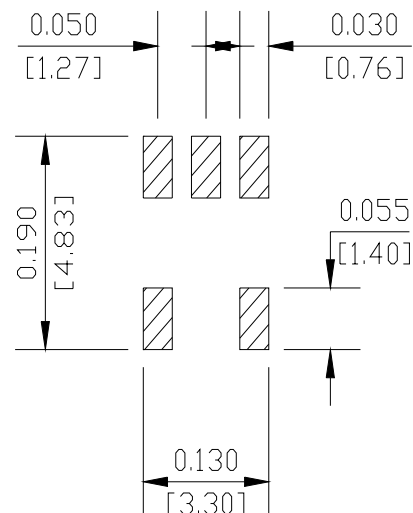


1:1 Broadband CATV, Flux Coupled Transformer
5-120MHz


MABACT0047
V1

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹


Insertion Loss

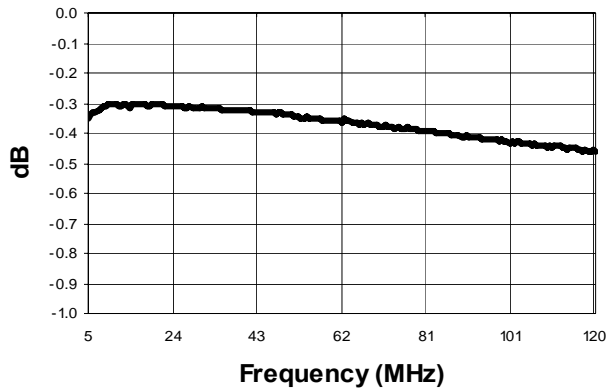

Return Loss: Input

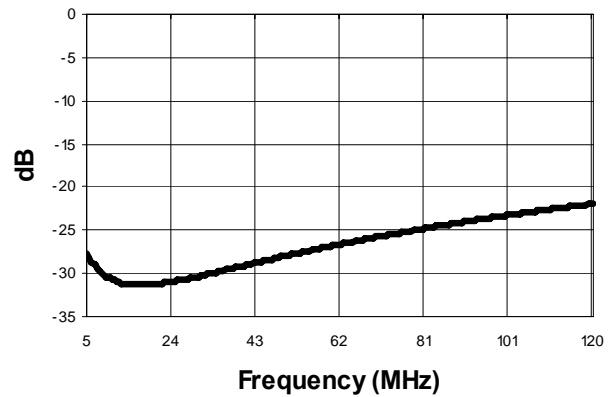

Amplitude Balance

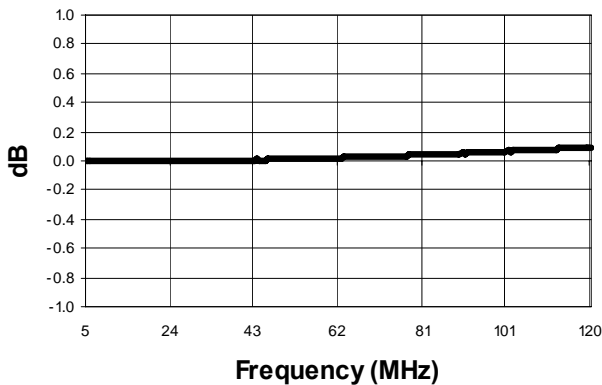

Phase Balance

