

E-Series RF 1:2.56 Impedance Ratio Center Taped Transformer 5 - 65 MHz




Features

- Surface Mount
- 1:2.56 Impedance Ratio Center taped.
- Available on Tape & Reel



SM-138 Package


Note: Non Hermetic Package

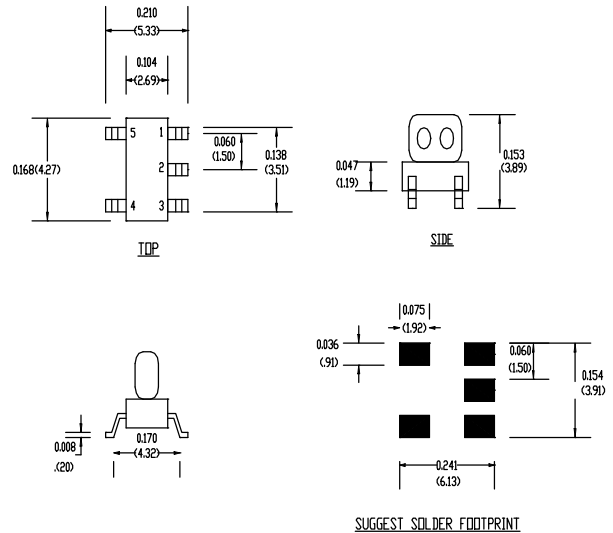

Description

M/A-COM's MABAES0017 is a 1:2.56 RF Flux Coupled transformer in a low cost, surface mount package. Ideally suited for high volume CATV applications.

Schematic

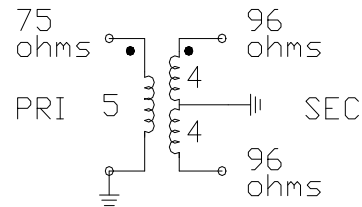

Electrical Specifications @25°C

Parameter	Units	Nominal	Typical	Minimum	Maximum
Frequency Range	5-65	MHz	—	—	—
Insertion Loss	5-65 MHz	dB	—	0.8	1.0
Amplitude Balance	5-65 MHz	dB	—	0.02	0.1
Phase Balance	5-65 MHz	Degrees	—	0.2	1.0

Please Note that the photograph above indicates package shape only, unit may be wired differently.

S 1599 A



M/A-COM n North America: Tel. (800) 366-2266, Fax (800) 618-8883 n Asia/Pacific: Tel.+85 2 2111 8088, Fax +85 2 2111 8087 n Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

www.macom.com

Specifications subject to change without notice.

Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temperature	-40°C to +85°C

Functional Configuration


Function	Pin No.
Primary	4
Primary Dot	5
Secondary	3
Secondary Dot	1
Centre Tap	2

Typical Performance @ +25°C


Insertion Loss 1

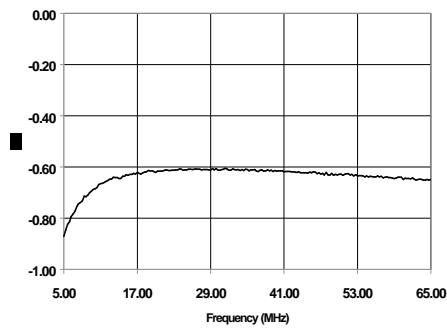


Insertion Loss 2

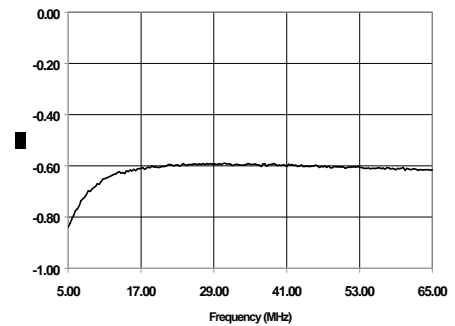

Amplitude Balance

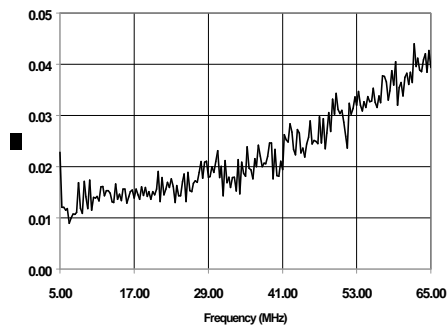

Phase Balance

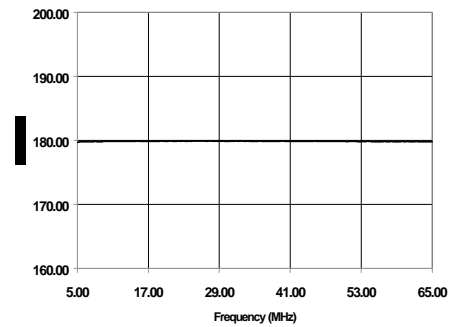

S 1599 A