


# LVDS TCXO/TCVCXO AA-XADXXX-X Series

## Description


The AA-XADXXX Series of quartz crystal oscillators provide excellent temperature stability with LVDS complementary outputs and very low phase noise. The device is packaged in a miniature, low profile leadless FR4 based package with gold plated pads, which enhances compatibility with PCB material. COTS/Dual use.

## Creating a Part Number

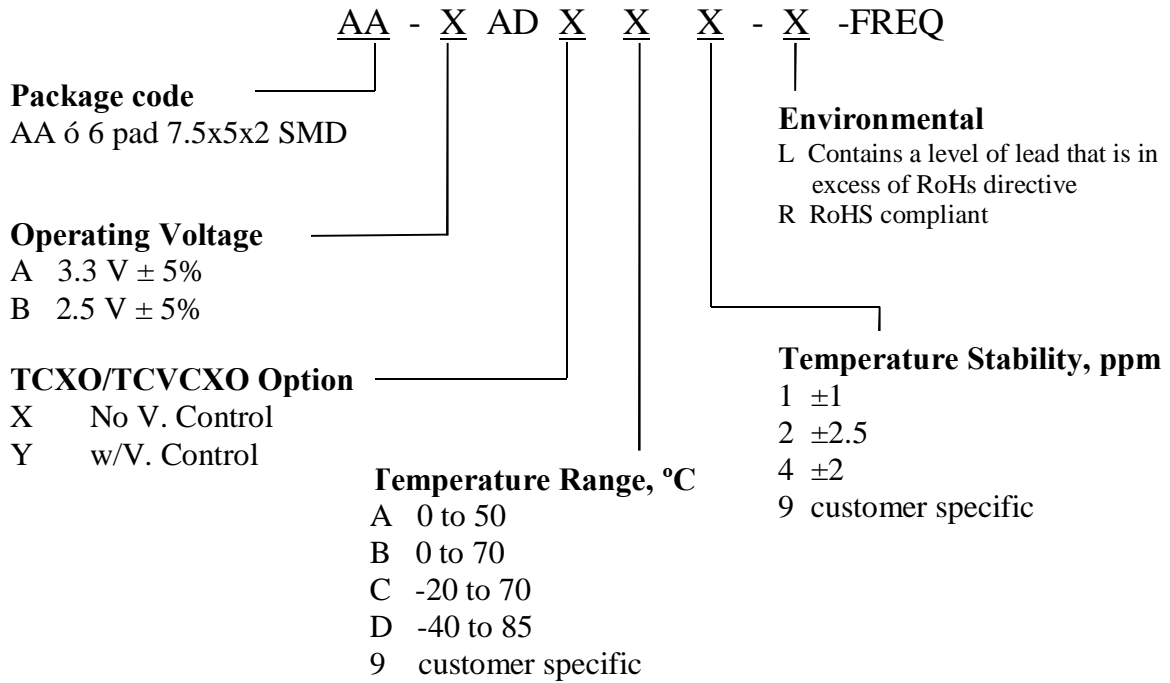

**LVDS TCXO/TCVCXO  
AA-XADXX-X Series**


**Drawing Specification**

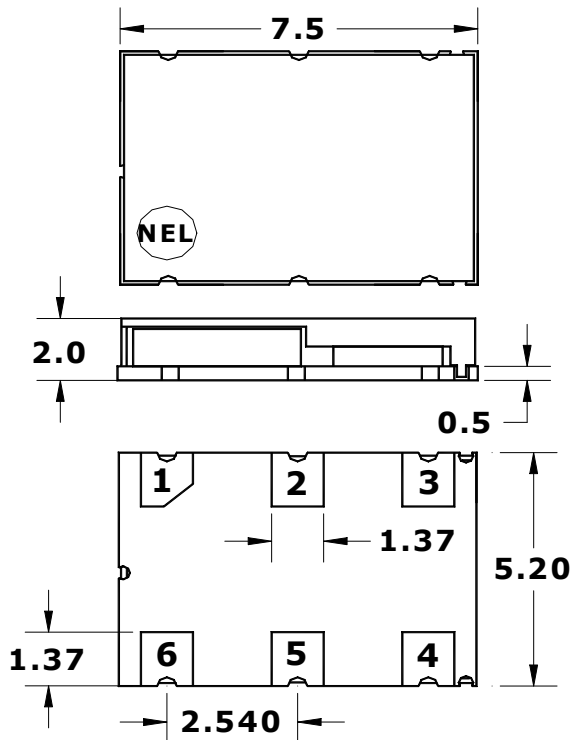

**Pin Connections:**

- 1 – N/C or Vc**
- 2 – N/C**
- 3 – GND**
- 4 – OUT**
- 5 – Complementary OUT**
- 6 – Vcc**

**Dimensions are typical in mm**



**Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Operating Temperature Range	To	-40 to +85	°C
Storage Temperature Range	Tst	-50 to +90	°C
Supply Voltage	Vcc	-0.5 to 4.5	V
Voltage Control	Vc	0 to Vcc	V



## LVDS TCXO/TCVCXO AA-XADXX-X Series

### Electrical Parameters (1)

Parameter	Symb	Conditions, Note	MIN	TYP	MAX	Unit	
Nominal Frequency	Fo		10.0		120	MHz	
Supply Voltage	Vcc	Code A Code B	3.135 2.375	3.3 2.5	3.465 2.625	V	
Supply current	Icc			40	50	mA	
Load		At receiving end between the outputs	90	100	110	Ohm	
Output Levels	Vod	Differential amplitude	247	330	454	mV	
		Amplitude error			50	mV	
	Vof	Offset Voltage	1.125	1.25	1.375	V	
		Offset voltage error			50	mV	
Duty Cycle (Symmetry)		At outputs crossing, room temperature	45/55	50/50	55/45	%	
Rise/Fall Time	Tr/Tf	20 to 80, 80 to 20 %		0.35	0.4	ns	
<b>Jitter</b>	Integrated	J	Integrated from Phase Noise, 12 KHz to 20 MHz , RMS		0.2	ps	
	Wavecrest characterized	Random period,		2.5 2.5		ps	
		Accumul. pk-to-pk			20		ps
		Deterministic	F>40MHz		3	6	ps
Sub-harmonics			<40 M >40 M	-50 -45		dBc	
Phase Noise	£( f)	20 MHz	@ 10 Hz @100 Hz @1 KHz @10KHz @100KHz @>1MHz	-85 -115 -135 -140 -145 -148		dBc/Hz	
Frequency stability	F/F	Over Temp -30 to 80 C See chart Aging, 1 <sup>st</sup> year Aging 10 years Load Vcc Reflow Calibration as shipped		2.5	1 3.5 0.1 0.1/V 2 1	ppm	
Pullability (Vc option)		0.3V to 3.0V	5			ppm	

Note 1. All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load.




**LVDS TCXO/TCVCXO  
AA-XADXX-X Series**

**Environmental and Mechanical Characteristics**

<b>Operating temp. range</b>	see part # table
<b>Mechanical Shock</b>	Per MIL-STD-202, Method 213, Cond. A
<b>Thermal Shock</b>	Per MIL-STD-883, Method 1011, Cond. A
<b>Vibration</b>	Per MIL-STD-883, Method 2007, Cond. A
<b>Hermetic Seal</b>	Leak rate less than $1 \times 10^{-8}$ atm.cc/s of helium
<b>Soldering conditions</b>	See MAX reflow profile below; The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended

**MAX Reflow Profile**

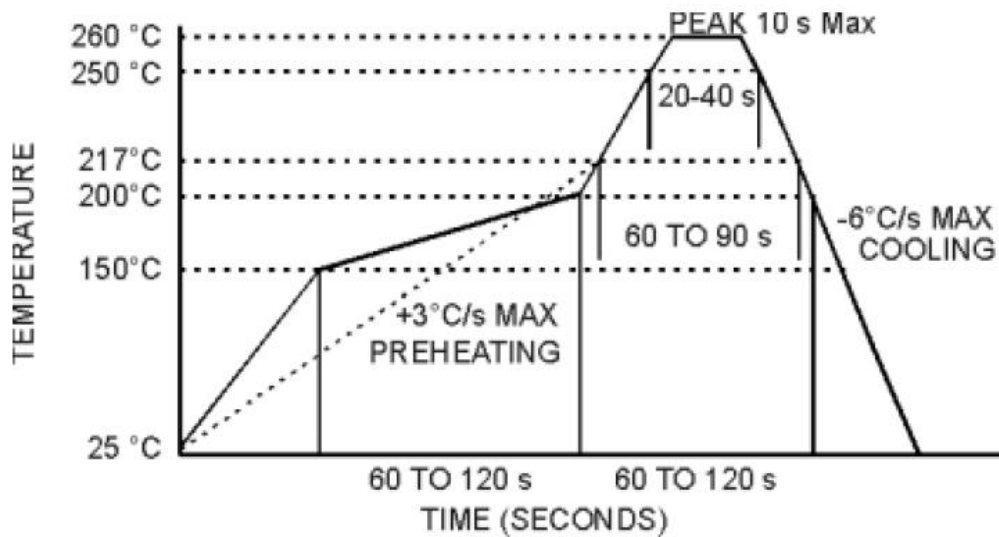

The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended.